

**Machine Learning Installation Manual**  
**Oracle FLEXCUBE Universal Banking**  
**Release 14.7.6.0.0**  
**Part No. G29457-01**  
**[April][2025]**



## Table of Contents

<b>1</b>	<b>Abbreviations .....</b>	<b>4</b>
<b>2</b>	<b>Introduction .....</b>	<b>4</b>
<b>3</b>	<b>Application Compatibility .....</b>	<b>4</b>
3.1	Oracle FLEXCUBE Universal Banking.....	4
3.2	OML4R (Previously Oracle R Enterprise (ORE)) .....	4
3.3	Machine Learning Database.....	4
<b>4</b>	<b>Oracle FLEXCUBE Machine Learning Architecture.....</b>	<b>5</b>
<b>5</b>	<b>Pre-Installation Checklist .....</b>	<b>5</b>
5.1	FLEXCUBE Database Instance.....	5
5.2	Machine Learning Database Instance .....	5
5.3	Data Replication.....	6
<b>6</b>	<b>Installation Steps .....</b>	<b>7</b>
6.1	Machine Learning Instance .....	7
6.1.1	Object Summary .....	7
6.1.2	User Creation and granting Privileges .....	7
6.1.3	Installation of Database Objects .....	8
6.1.4	Installation of OML4R (previously ORE) Packages.....	10
6.1.5	Installation of OML4R (previously ORE) wrapper scripts .....	11
6.2	FLEXCUBE Instance .....	16
6.2.1	Object Summary .....	16
6.2.2	Login to FLEXCUBE Instance.....	16
6.2.3	Database Link .....	16
6.2.4	Execute the INSERT Scripts .....	16
6.2.5	FLEXCUBE User Interfaces .....	16
6.2.6	Execute View Scripts .....	17
6.3	Machine Learning Validation Checkpoints.....	17
6.3.1	Validate Database Tables .....	17
6.3.2	Validate Views .....	18
6.3.3	Validate PL/SQL Objects.....	18

6.3.4	Validate OML4R (Previously ORE) Scripts .....	19
6.4	FLEXCUBE Validation Checkpoints.....	20
6.4.1	Validate database link creation .....	20
6.4.2	Validate database link credentials .....	20
6.4.3	Validate FLEXCUBE Menu .....	20

## 1 Abbreviations

Abbreviation	Detailed Description
FCUBS	Oracle FLEXCUBE Universal Banking
ML	Machine Learning
LTV	Lifetime Value
OML4R	Previously Oracle R Enterprise (ORE)
IDE	Integrated Development Environment

## 2 Introduction

This document contains detailed guidelines for installing the Oracle FLEXCUBE Machine Learning framework.

**Note:** Refer to the Oracle FLEXCUBE Machine Learning User Manual for Model execution and control.

## 3 Application Compatibility

### 3.1 Oracle FLEXCUBE Universal Banking

Version: 14.7.6.0.0

### 3.2 OML4R (Previously Oracle R Enterprise (ORE))

- All the Machine Learning models were built using OML4R (Previously Oracle R Enterprise). Please choose the version as per the following table.


Linux Server/Version	OML4R Version
Oracle Linux server 7.1 (x86 64 bit)	OML4R 1.5.1
Oracle Linux server 8.1(x86 64 bit)	OML4R 2.0

- For installation and setup please refer to the guidelines received with the licensed version of OML4R (Previously Oracle R Enterprise Software). Refer the following link for [Oracle Machine Learning for R Configuration Requirements and Server Support Matrix](#).

### 3.3 Machine Learning Database

- Oracle Database 19.6c

## 4 Oracle FLEXCUBE Machine Learning Architecture

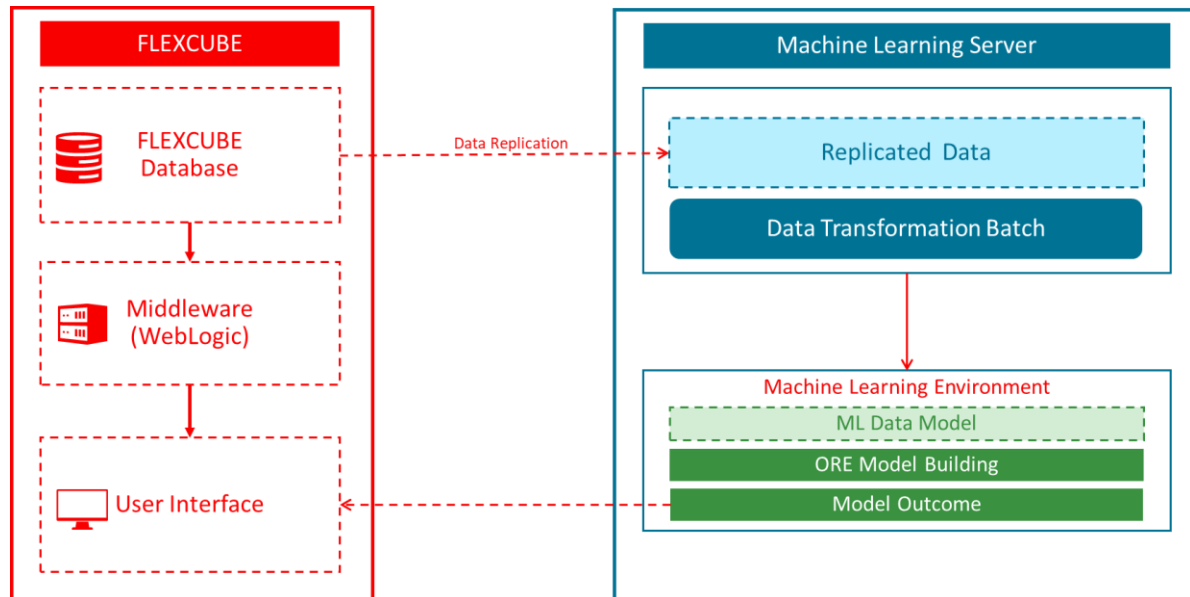

### Note:

- FLEXCUBE database and Machine learning database should be on two different servers.
- This is to ensure that the machine learning workload is not on the critical path of banking operations and hog critical server memory.

## 5 Pre-Installation Checklist

### 5.1 FLEXCUBE Database Instance

- The FLEXCUBE database instance should be up and available.

### 5.2 Machine Learning Database Instance



**Note:** OML4R (Previously ORE) database MUST be a separate instance from Oracle FLEXCUBE Instance. This is to ensure that the machine learning workload is not on the critical path of banking operations and hog critical server memory

Please follow the sequential steps are detailed below.

- 1) Install Oracle Database on the Machine Learning server. Refer to [3.3](#) for compatible database versions.
- 2) OML4R (Previously Oracle R Enterprise) should be installed in Machine Learning database server. Refer to [3.2](#) for compatible OML4R (Previously ORE) version.

- 3) For OML4R (Previously ORE) installation and setup please refer to the guideline received with licensed version.
- 4) R Client needs to be installed to access OML4R (Previously Oracle R Enterprise) server from client machine. R client could be open-source R or Oracle R Distribution. Below are the links to install the same.
  - a. Open-source R: <https://cran.r-project.org/bin/windows/base/>
  - b. Oracle R Distribution (ORD): <https://oss.oracle.com/ORD/>
- 5) RStudio IDE can be installed for developer friendly environment. Below is the link to download RStudio. Download the version based on the operating system in client machine  
<https://www.rstudio.com/products/rstudio/download/#download>
- 6) Set up OML4R (Previously Oracle R Enterprise) client in client machine. Please refer to the guideline received with licensed version.

For more information on R Installation and Administration Guide refer the below table.

OML Version	OML Release	URL Reference
OML4R 1.5.1	1.5.1 E97849-11 April 2021	<a href="https://docs.oracle.com/en/database/oracle/machine-learning/oml4r/2.0.0/oread/index.html">https://docs.oracle.com/en/database/oracle/machine-learning/oml4r/2.0.0/oread/index.html</a>
OML4R 2.0	F22960-04 April 2025	<a href="https://docs.oracle.com/en/database/oracle/machine-learning/oml4r/2.0.0/oread/changes-in-ORE-installation-administration-guide.html#GUID-4E9A8524-BF2E-49BF-B4EA-91F651D51014">https://docs.oracle.com/en/database/oracle/machine-learning/oml4r/2.0.0/oread/changes-in-ORE-installation-administration-guide.html#GUID-4E9A8524-BF2E-49BF-B4EA-91F651D51014</a>

### 5.3 Data Replication



Data replication from FLEXCUBE to the Machine learning server is outside the purview of this document.

Any data replication software could be deployed to replicate FLEXCUBE data to the Machine Learning database Instance

It is left to the bank/solution team to decide on the data Replication Software including the mode of replication and frequency of replication

Please ensure FLEXCUBE data is already replicated into the Machine Learning Schema, before proceeding ahead with the Installation

## 6 Installation Steps

To proceed with the installation steps first check if all the checkpoints mentioned in section [Pre-Installation Checklist](#) are met. Follow below steps sequentially for the installation.

### 6.1 Machine Learning Instance

#### 6.1.1 Object Summary

No.	OBJECT TYPE	COUNT
1	TABLES	27
2	VIEWS	08
3	INSERT SCRIPTS (INC)	01
4	SEQUENCE (SEQ)	01
5	PROCEDURE (PRC)	01
6	PACKAGE SPECIFICATION(SPC)	02
7	PACKAGE BODY (SQL)	02
8	FUNCTION (FNC)	01
9	R BINARY PACKAGES (OML4R, old ORE)	02
10	R WRAPPER SCRIPT (OML4R, old ORE)	01
	<b>Total Object Count</b>	<b>46</b>

#### 6.1.2 User Creation and granting Privileges

##### 6.1.2.1 Create User

Log in to the Machine Learning database with SYSDBA credentials and execute below query to create a machine learning user.

**CREATE USER <username> IDENTIFIED BY <password>;**

If the user has been already created at the time of OML4R (previously ORE) installation, then proceed to next step.

##### 6.1.2.2 Give Necessary Privileges

Grant the below privileges to the machine learning user created in the previous step (6.1.2.1).

- i. **grant CONNECT, RQADMIN TO <username>;**
- ii. **grant CREATE SESSION to <username>;**
- iii. **grant CREATE TABLE to <username>;**
- iv. **grant CREATE VIEW to <username>;**
- v. **grant CREATE DATABASE LINK to <username>;**
- vi. **grant CREATE MINING MODEL to <username>;**
- vii. **grant CREATE PROCEDURE to <username>;**
- viii. **grant CREATE JOB to <username>;**

### 6.1.3 Installation of Database Objects

#### 6.1.3.1 *Login to the Machine Learning Schema*

Connect using the user credentials defined in step (6.1.2.1).

#### 6.1.3.2 *Execute DDL Scripts*

Execute the DDL scripts mentioned in the section *Machine Learning Data Model*. Below are the DDL scripts (27 Tables):

1. MLTB\_BRN\_RISK.ddl
2. MLTB\_BRN\_SEGMENT.ddl
3. MLTB\_CUST\_ACQ\_COST.ddl
4. MLTB\_CUST\_CHRN\_LTV\_SEG.ddl
5. MLTB\_CUST\_ICCF\_INCOME.ddl
6. MLTB\_DEBUG.ddl
7. MLTB\_ENT\_RISK.ddl
8. MLTB\_ENT\_SEGMENT.ddl
9. MLTB\_MODEL\_PERF\_LOG.ddl
10. MLTB\_PARAM.ddl
11. MLTB\_PROC\_STAT\_DETAIL.ddl
12. MLTB\_PROC\_STAT\_DETAIL\_HIST.ddl
13. MLTB\_PROC\_STAT\_MASTER.ddl
14. MLTB\_PROC\_STAT\_MASTER\_HIST.ddl
15. MLTB\_RETAIL\_CUST\_ENG.ddl
16. MLTB\_RETAIL\_CUST\_ENG\_HIST.ddl
17. MLTB\_RETAIL\_CUST\_TXN\_TREND.ddl
18. MLTB\_STAT\_DETAIL\_PREV\_RUN.ddl
19. MLTB\_STAT\_MASTER\_PREV\_RUN.ddl
20. MLTG\_TREND\_TXN\_DATES.DDL
21. MLTM\_STG\_RETAIL\_CUST\_PROFILE.ddl
22. MLTB\_DATA\_TRANSFORM\_JOB\_PARAM.ddl
23. MLTB\_PROD\_CUST\_SCORE.ddl
24. MLTG\_PROD\_CUST\_SCORE\_VAMI.ddl
25. MLTG\_PROD\_CUST\_SCORE\_ROLL.ddl
26. MLTG\_PROD\_CUST\_SCORE\_CLOS.ddl
27. MLTB\_PROD\_FEATURE.ddl



#### 6.1.3.3 *Execute the VIEW scripts*

With reference to the section 5.3 Data replication, the below views are used for data replication from FCUBS.

Execute the VW scripts mentioned in the section [Machine Learning Data Model](#). Below are the VW scripts (8 Views):

1. mlvw\_brn\_seg.vw
2. mlvw\_brn\_seg\_det.vw
3. mlvw\_cust\_ltv\_bank.vw
4. mlvw\_cust\_ltv\_seg.vw
5. mlvw\_ent\_seg.vw
6. mlvw\_ent\_seg\_det.vw
7. mlvw\_retail\_cust\_eng.vw
8. mlvw\_prod\_desc.vw

#### 6.1.3.4 *Execute the INSERT Scripts*

Execute the INC scripts mentioned in the section [Machine Learning Data Model](#). Below are the INC scripts (1 INC).

1. MLTB\_PARAM.INC

#### 6.1.3.5 *Execute Sequence Scripts*

Execute the SQL scripts mentioned in the section [Machine Learning Data Model](#). Below are the SEQ scripts (One).

1. SEQ\_ML\_DEBUG.SQL

#### 6.1.3.6 *Create PROCEDURE*

Compile the SQL script(s) mentioned in the section [Machine Learning Data Model](#). Below are the SQL script(s) for creating procedure(s) (one SQL).

1. PR\_ML\_DEBUG.SQL

#### 6.1.3.7 *Create PACKAGES*

Compile the SQL script(s) mentioned in the section [Machine Learning Data Model](#). Below are the SQL script(s) for creating package specification(s) and body (One SPC and one SQL).

1. MLPKS\_DATA\_TRANSFORMATION.SPC
2. MLPKS\_DATA\_TRANSFORMATION.SQL
3. MLPKS\_PROD\_TRANSFORMATION.SPC
4. MLPKS\_PROD\_TRANSFORMATION.SQL

#### 6.1.3.8 Create FUNCTION

Compile the SQL script(s) mentioned in section [Machine Learning Data Model](#). Below are the SQL script(s) for creating function(s) (one SQL)

1. FN\_MODELCONEX.SQL

### 6.1.4 Installation of OML4R (previously ORE) Packages

#### 6.1.4.1 Download ML binary packages.

There will be two binary packages, one for the global function, and another one for the FCUBS. Please install the appropriate binary packages according to the Linux server version.

Linux Server Version	Binary Package
Linux Binary Packages for Linux Server 7 version	1. globalfunction_0.1.0_R_x86_64-pc-linux-gnu.tar.gz 2. FCUBSML_0.2.0_R_x86_64-pc-linux-gnu.tar.gz
Linux Binary Packages for Linux Server 8 version:	1.globalfunction_0.1.0_OML4R2.0_x86_64-pc-linux8-gnu.tar.gz 2. FCUBSML_0.2.0_OML4R2.0_x86_64-pc-linux8-gnu.tar.gz

#### Check the user access and environment variables.

Usually, those things are already set up while installing OML4R (Previously ORE) in the server. The user should have the following access rights.

- *Has sudo rights access or root access for installing Oracle R Distribution.*
- *Is a member of the dba group for installing and using OML4R (Previously Oracle R Enterprise)*
- *Has write access to \$ORACLE\_HOME/lib.*

The following environment variable should be set up.

- *\$ORACLE\_SID specifies the identifier (SID) of the database.*
- *\$ORACLE\_HOME specifies the home directory of the database.*
- *\$LD\_LIBRARY\_PATH includes \$ORACLE\_HOME/lib.*
- *\$PATH includes \$ORACLE\_HOME/bin*

#### 6.1.4.2 Now install the packages in the server by executing following command.

Use the pseudo command in case the current user does not have write access to the OML4R (Previously ORE) library folder.

**ORE CMD INSTALL {package name}**

**If it is Linux Server 7 version then below files to be installed,**

*Example: -*

**ORE CMD INSTALL globalfunction\_0.1.0\_R\_x86\_64-pc-linux-gnu.tar.gz**

**ORE CMD INSTALL FCUBSML\_0.2.0\_R\_x86\_64-pc-linux-gnu.tar.gz**

```
-bash-4.2$ sudo ORE CMD INSTALL globalfunction_0.1.0_R_x86_64-pc-linux-gnu.tar.gz
* installing to library '/scratch/db/db1900/product/19.0.0/dbhome_1/R/library'
* installing *binary* package 'globalfunction' ...
* DONE (globalfunction)
```

```
-bash-4.2$ sudo ORE CMD INSTALL FCUBSML_0.2.0_R_x86_64-pc-linux-gnu.tar.gz
[sudo] password for kibose:
* installing to library '/scratch/db/db1900/product/19.0.0/dbhome_1/R/library'
* installing *binary* package 'FCUBSML' ...
* DONE (FCUBSML)
```

If it is Linux Server 8 version then below files to be installed,

Example:-

**ORE CMD INSTALL globalfunction\_0.1.0\_OML4R2.0\_x86\_64-pc-linux8-gnu.tar.gz**

**ORE CMD INSTALL FCUBSML\_0.2.0\_OML4R2.0\_x86\_64-pc-linux8-gnu.tar.gz**

6.1.4.3 After successful installation the packages will be present in OML4R (Previously ORE) library path.


```
-bash-4.2$ cd /scratch/db/db1900/product/19.0.0/dbhome_1/R/library
-bash-4.2$ pwd
/scratch/db/db1900/product/19.0.0/dbhome_1/R/library
-bash-4.2$ ll
total 100
drwxr-xr-x 9 db1900 oinstall 4096 Aug 19 17:13 arules
drwxr-xr-x 7 db1900 oinstall 4096 Aug 19 17:13 Cairo
drwxr-xr-x 7 db1900 oinstall 4096 Aug 19 17:13 DBI
drwxrwxr-x 6 root root 4096 Nov 26 15:33 FCISML
drwxrwxr-x 6 root root 4096 Nov 26 15:53 FCUBSML
drwxrwxr-x 6 root root 4096 Nov 26 15:55 globalfunction
```

## 6.1.5 Installation of OML4R (previously ORE) wrapper scripts

### 6.1.5.1 Launch R Studio

1. Launch RStudio IDE.
2. The default screen will be displayed as shown below.
3. If open-source R is installed, then it will show the version of Open Source R

Open Source R:

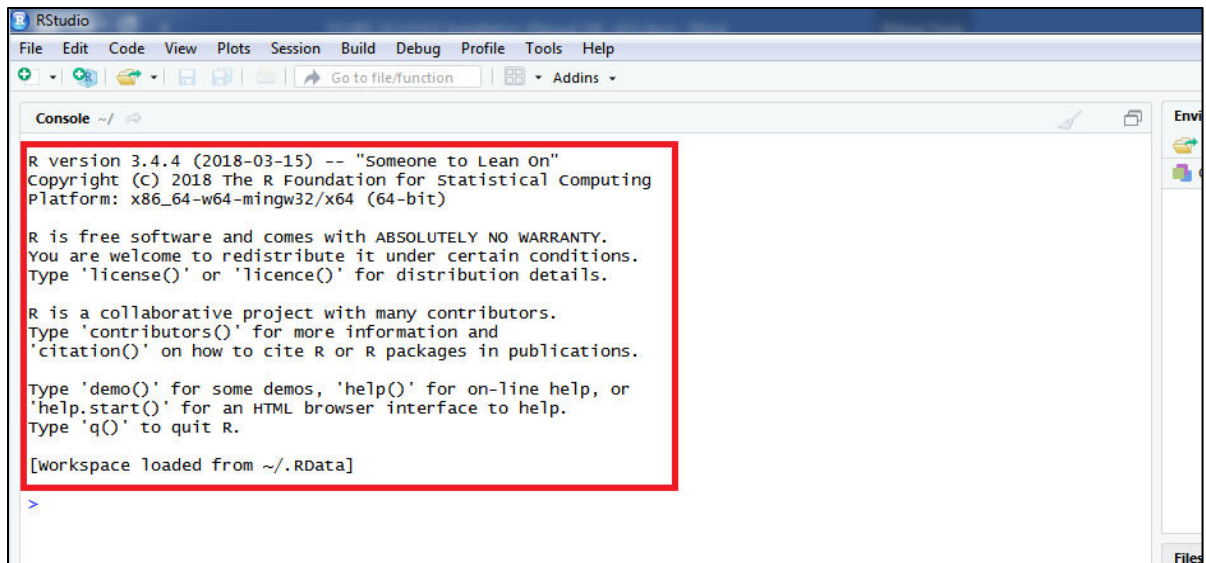

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

Console ~/

```
R version 3.4.4 (2018-03-15) -- "Someone to Lean On"
Copyright (C) 2018 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.


Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[workspace loaded from ~/.RData]

>
```

4. Or, if the Oracle R Distribution (ORD) is used, it will show the version of ORD.

Oracle R Distribution (ORD):

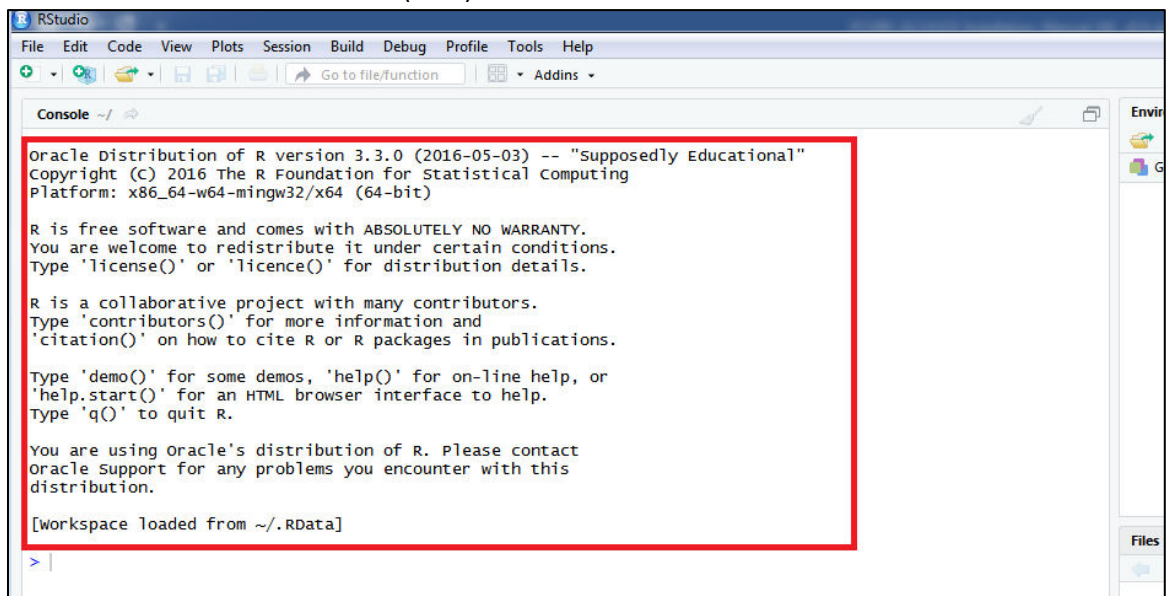

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

Console ~/

```
Oracle Distribution of R version 3.3.0 (2016-05-03) -- "Supposedly Educational"
Copyright (C) 2016 The R Foundation for Statistical computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

You are using Oracle's distribution of R. Please contact
Oracle Support for any problems you encounter with this
distribution.


[workspace loaded from ~/.RData]

> |
```


### 6.1.5.2 Loading ORE Library

1. From RStudio console, execute the below command.

```
> library(ORE)
```

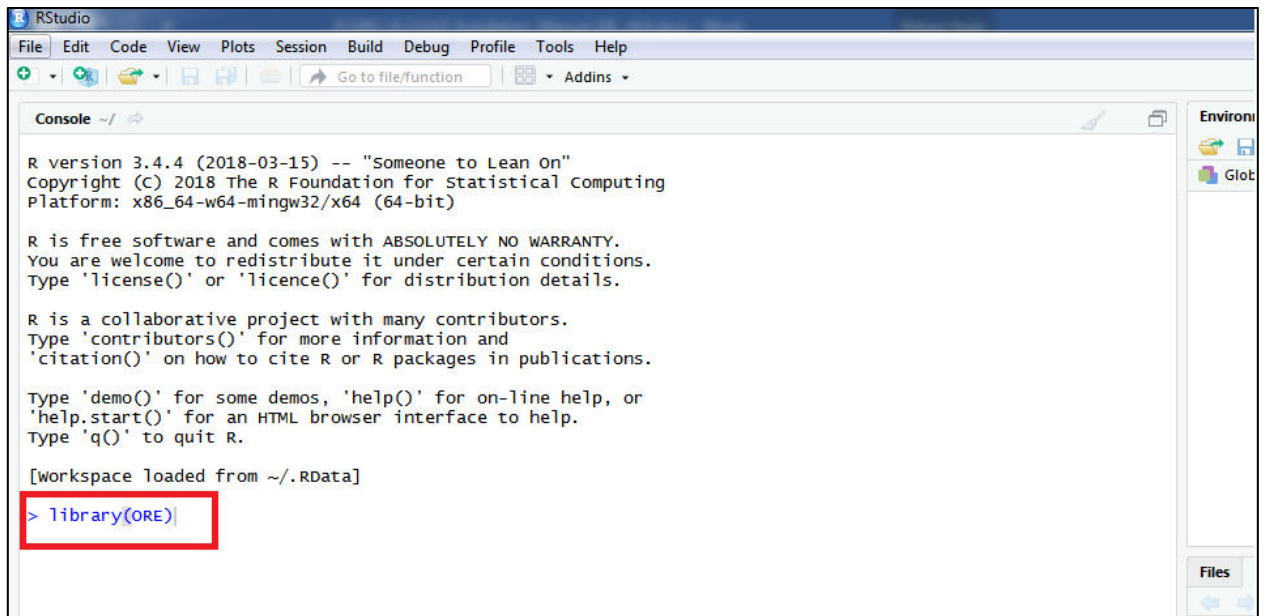

2. Once executed, it will show the following output in the console.

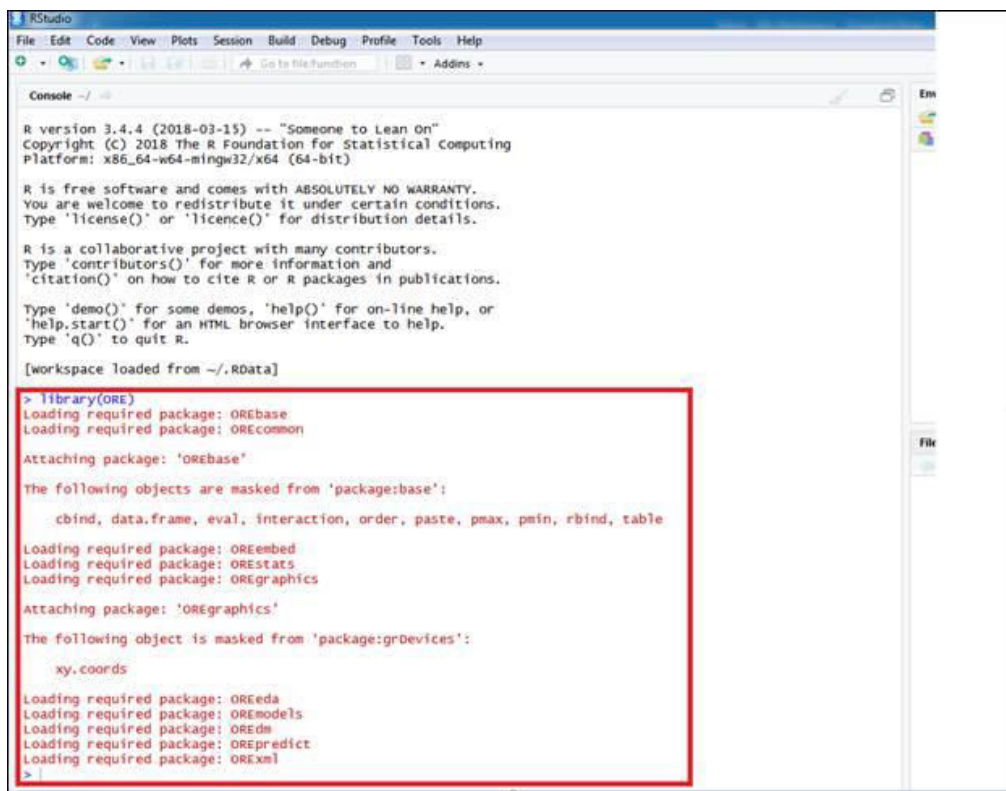


### 6.1.5.3 Connecting to the ORE Server

1. To connect the ORE server from the client machine, execute the below command.

```
ore.connect (user = <username>, sid =<sid>, host =<hostname>, password=<password>, port =
<port>)
```

**Note:** The credential created in step 6.1.2.1

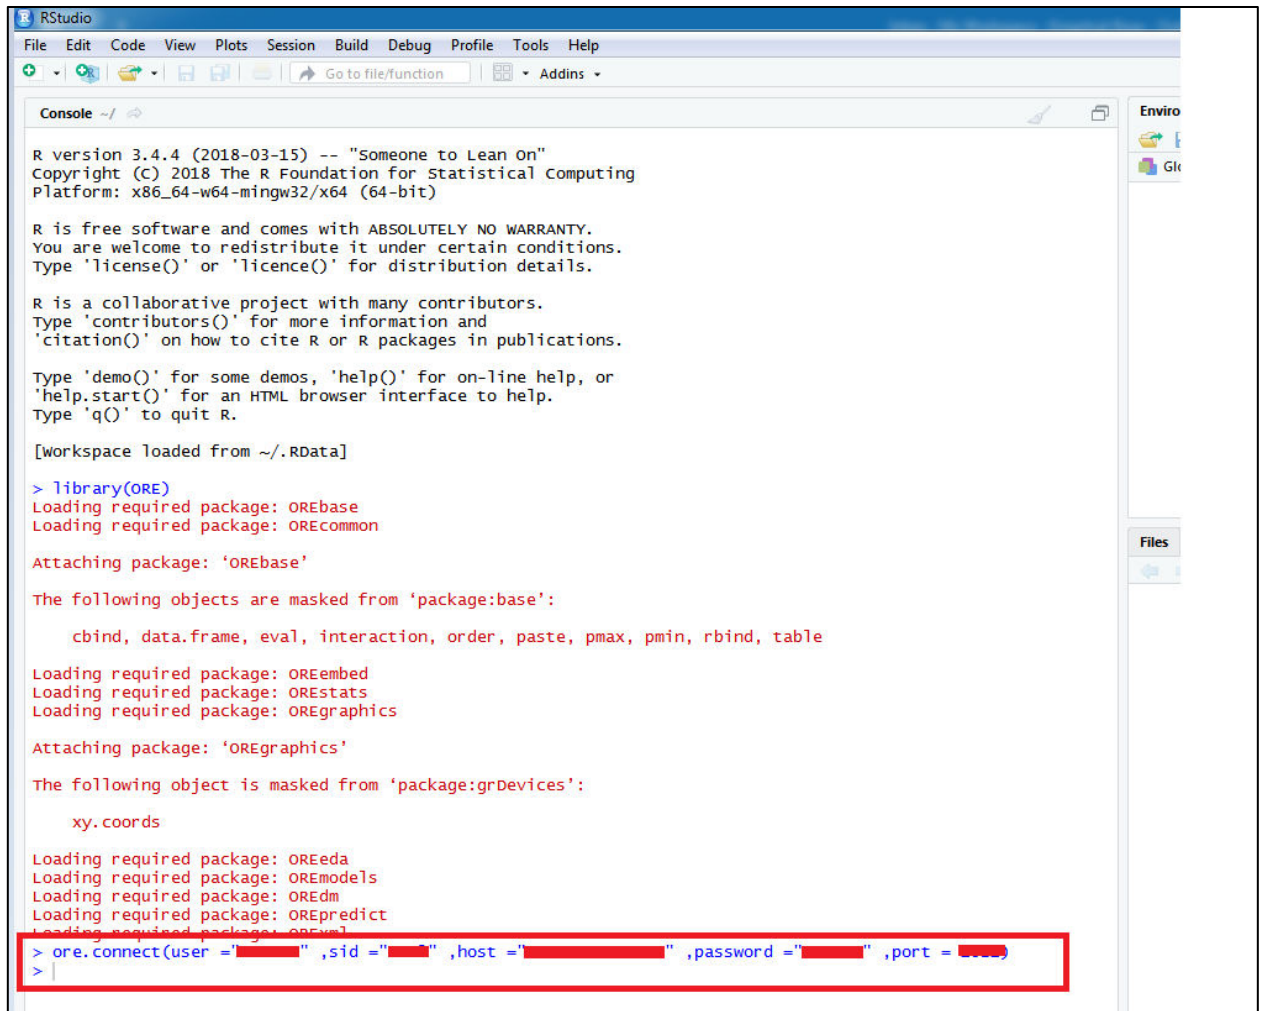

The screenshot shows the RStudio interface with the console pane active. The console displays the R version 3.4.4 startup message, followed by the loading of the OREbase and OREcommon packages. It then shows the loading of OREembed, OREstats, and OREgraphics packages. Finally, it shows the loading of OREeda, OREmodels, OREdm, OREpredict, and OREeval packages. The last line of code entered in the console is `ore.connect(user = " ", sid = " ", host = " ", password = " ", port = 5555)`, which is highlighted with a red box.

```
R version 3.4.4 (2018-03-15) -- "Someone to Lean On"
Copyright (C) 2018 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[workspace loaded from ~/.RData]

> library(ORE)
Loading required package: OREbase
Loading required package: OREcommon

Attaching package: 'OREbase'

The following objects are masked from 'package:base':

  cbind, data.frame, eval, interaction, order, paste, pmax, pmin, rbind, table

Loading required package: OREembed
Loading required package: OREstats
Loading required package: OREgraphics

Attaching package: 'OREgraphics'

The following object is masked from 'package:grDevices':

  xy.coords

Loading required package: OREeda
Loading required package: OREmodels
Loading required package: OREdm
Loading required package: OREpredict
Loading required package: OREeval
> ore.connect(user = " ", sid = " ", host = " ", password = " ", port = 5555)
>
```

#### 6.1.5.4 Testing the ORE Connection

1. To check if the ORE client is connected to the ORE server, execute the below command from the RStudio console.  
`ore.is.connected()`
2. It should return TRUE if the ORE connection is successful, otherwise, it will return FALSE.



```

> library(ORE)
Loading required package: OREbase
Loading required package: OREcommon

Attaching package: 'OREbase'

The following objects are masked from 'package:base':

  cbind, data.frame, eval, interaction, order, paste, pmax, pmin, rbind, table

Loading required package: OREembed
Loading required package: OREstats
Loading required package: OREgraphics

Attaching package: 'OREgraphics'

The following object is masked from 'package:grDevices':

  xy.coords

Loading required package: OREeda
Loading required package: OREmodels
Loading required package: OREdm
Loading required package: OREpredict
Loading required package: ORExml
> ore.connect(user = " ", sid = " ", host = " ", password = " ", port = )
> ore.is.connected()
[1] TRUE
>

```

#### 6.1.5.5 Download the FCUBSML wrapper script and save it in a local directory

Example:- D:\FCUBSML

#### 6.1.5.6 Run ORE Scripts

1. To run ORE scripts, execute the below commands from RStudio console with appropriate FCUBS wrapper source as per table given below.

Linux Server Version	FCUBS Wrapper source
Oracle Linux server 7.1 (x86 64 bit)	FCUBS_14.4.0.0.0_WRAPPER.R
Oracle Linux server 8.1(x86 64 bit)	FCUBS_WRAPPER.R


Command Template and example:

`>source("<directory_path>/<filename.R>")`

Example:- `source("D:/FCUBSML/FCUBS_14.4.0.0.0_WRAPPER.R")`



Note: Please note the forward slash ("/")

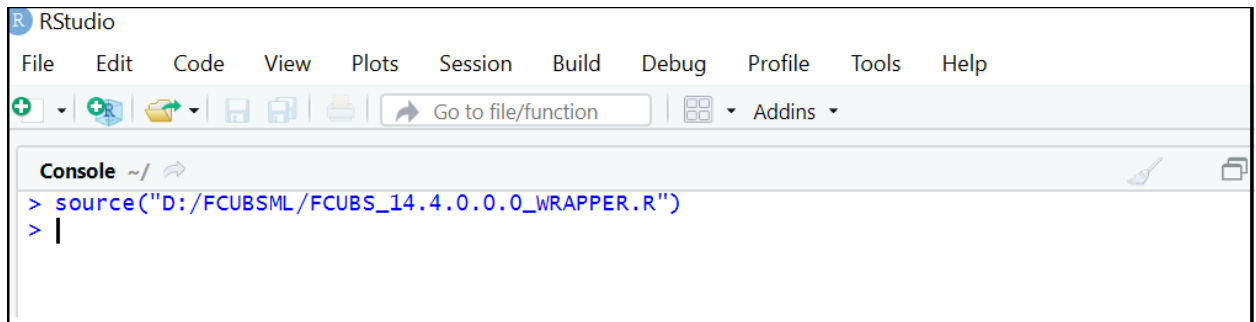

## 6.2 FLEXCUBE Instance

### 6.2.1 Object Summary

No.	OBJECT TYPE	COUNT
1	Database Link	01
2	INC	13
3	Function IDs	04
4	View	01
	<b>Total Object Count</b>	<b>19</b>

### 6.2.2 Login to FLEXCUBE Instance

Connect to the FLEXCUBE Database using the required credentials.

### 6.2.3 Database Link

1. The database link FCUBSML must point to the machine learning user.
2. Edit the database link script FCUBSML.SQL with the machine learning user credentials created as part of section 6.1.2.1.
3. Execute the modified script FCUBSML.sql



Note: Do not change the Database link name FCUBSML

### 6.2.4 Execute the INSERT Scripts

Execute the INC scripts mentioned in section FLEXCUBE database objects, under section 5.1.2 below is the INC scripts.

1. SMTB\_FUNCTION\_DESCRIPTION.INC
2. ERTB\_MSGS.INC
3. CSTB\_OTHER\_LABELS.INC
4. CSTB\_SUMMARY\_INFO.INC
5. SMTB\_FCC\_FCJ\_MAPPING.INC



6. SMTB\_MENU.INC
7. SMTB\_ROLE\_DETAIL.INC
8. STTB\_AUDIT\_PK\_COLS.INC
9. CSTB\_FID\_DATA\_BLOCKS.INC
10. CSTB\_FIELD\_LABELS.INC
11. CSTB\_ITEM\_DESC.INC
12. CSTB\_LABELS.INC
13. CSTB\_LOV\_INFO.INC

### 6.2.5 FLEXCUBE User Interfaces

Refer to the standard Oracle FLEXCUBE Installation Manual for deploying these new user interface screens:

1. STDASHBC
2. STDASHAB
3. STDASHCD
4. STDDRMBE

### 6.2.6 Execute View Scripts

1. Parent\_view.vw

## 6.3 Machine Learning Validation Checkpoints

### 6.3.1 Validate Database Tables

1. Log in to the Machine Learning schema and run the SQL query given below:

```
Select owner, object_name, object_type, status, created from all_objects
where object_name in
('MLTB_BRN_RISK','MLTB_BRN_SEGMENT','MLTB_CUST_ACQ_COST',
'MLTB_CUST_CHRN_LTV_SEG','MLTB_CUST_ICCF_INCOME','MLTB_DEBUG',
'MLTB_ENT_RISK','MLTB_ENT_SEGMENT','MLTB_MODEL_PERF_LOG','MLTB_PARAM',
'MLTB_RETAIL_CUST_ENG','MLTB_RETAIL_CUST_ENG_HIST',
'MLTB_RETAIL_CUST_TXN_TREND','MLTG_TREND_TXN_DATES',
'MLTM_STG_RETAIL_CUST_PROFILE','MLTB_PROC_STAT_DETAIL',
'MLTB_PROC_STAT_DETAIL_HIST','MLTB_PROC_STAT_MASTER',
'MLTB_PROC_STAT_MASTER_HIST','MLTB_STAT_DETAIL_PREV_RUN',
'MLTB_STAT_MASTER_PREV_RUN',
'MLTB_DATA_TRANSFORM_JOB_PARAM','MLTB_PROD_CUST_SCORE',
'MLTG_PROD_CUST_SCORE_VAMI','MLTG_PROD_CUST_SCORE_ROLL',
'MLTG_PROD_CUST_SCORE_CLOS','MLTB_PROD_FEATURES')
```

2. The SQL query should return 27 rows with the following details.

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name >	MLTB_BRN_RISK	TABLE	VALID	Creation Date

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name>	MLTB_BRN_SEGMENT	TABLE	VALID	Creation Date
< Schema name>	MLTB_CUST_ACQ_COST	TABLE	VALID	Creation Date
< Schema name>	MLTB_CUST_CHRN_LTV_SEG	TABLE	VALID	Creation Date
< Schema name>	MLTB_CUST_ICCF_INCOME	TABLE	VALID	Creation Date
< Schema name>	MLTB_DEBUG	TABLE	VALID	Creation Date
< Schema name>	MLTB_ENT_RISK	TABLE	VALID	Creation Date
< Schema name>	MLTB_ENT_SEGMENT	TABLE	VALID	Creation Date
< Schema name>	MLTB_MODEL_PERF_LOG	TABLE	VALID	Creation Date
< Schema name>	MLTB_PARAM	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROC_STAT_DETAIL	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROC_STAT_DETAIL_HIST	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROC_STAT_MASTER	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROC_STAT_MASTER_HIST	TABLE	VALID	Creation Date
< Schema name>	MLTB_RETAIL_CUST_ENG	TABLE	VALID	Creation Date
< Schema name>	MLTB_RETAIL_CUST_ENG_HIST	TABLE	VALID	Creation Date
< Schema name>	MLTB_RETAIL_CUST_TXN_TREND	TABLE	VALID	Creation Date
< Schema name>	MLTB_STAT_DETAIL_PREV_RUN	TABLE	VALID	Creation Date
< Schema name>	MLTB_STAT_MASTER_PREV_RUN	TABLE	VALID	Creation Date
< Schema name>	MLTG_TREND_TXN_DATES	TABLE	VALID	Creation Date
< Schema name>	MLTM_STG_RETAIL_CUST_PROFILE	TABLE	VALID	Creation Date
< Schema name>	MLTB_DATA_TRANSFORM_JOB_PARAM	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROD_CUST_SCORE	TABLE	VALID	Creation Date
< Schema name>	MLTG_PROD_CUST_SCORE_VAMI	TABLE	VALID	Creation Date
< Schema name>	MLTG_PROD_CUST_SCORE_ROLL	TABLE	VALID	Creation Date
< Schema name>	MLTG_PROD_CUST_SCORE_CLOS	TABLE	VALID	Creation Date
< Schema name>	MLTB_PROD_FEATURES	TABLE	VALID	Creation Date

### 6.3.2 Validate Views

1. Log in to the Machine Learning schema and run the SQL query given below:

```
Select owner, object_name, object_type, status, created from all_objects
where object_name in
('MLVW_BRN_SEG','MLVW_BRN_SEG_DET','MLVW_CUST_LTV_BANK',
'MLVW_CUST_LTV_SEG','MLVW_ENT_SEG','MLVW_ENT_SEG_DET',
'MLVW_RETAIL_CUST_ENG','MLVW_PROD_DESC','PARENT_VIEW');
```

2. The SQL query should return 8 rows with the following details.

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name>	MLVW_BRN_SEG	VIEW	VALID	Creation Date
< Schema name>	MLVW_BRN_SEG_DET	VIEW	VALID	Creation Date
< Schema name>	MLVW_CUST_LTV_BANK	VIEW	VALID	Creation Date
< Schema name>	MLVW_CUST_LTV_SEG	VIEW	VALID	Creation Date
< Schema name>	MLVW_ENT_SEG	VIEW	VALID	Creation Date
< Schema name>	MLVW_ENT_SEG_DET	VIEW	VALID	Creation Date

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name>	MLVW_RETAIL_CUST_ENG	VIEW	VALID	Creation Date
< Schema name>	MLVW_PROD_DESC	VIEW	VALID	Creation Date
< Schema name>	PARENT_VIEW	VIEW	VALID	Creation Date

### 6.3.3 Validate PL/SQL Objects

1. Log in to the Machine Learning schema and run the SQL query given below:

```
select owner,object_name,object_type,status,created
from all_objects where object_name in
('MLPKS_DATA_TRANSFORMATION','MLPKS_PROD_TRANSFORMATION','PR_ML_DEBUG','
FN_MODELCONEX')
```

2. The SQL query should produce the following result:

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
<Schema name>	MLPKS_DATA_TRANSFORMATION	PACKAGE	VALID	Creation Date
<Schema name>	MLPKS_DATA_TRANSFORMATION	PACKAGE BODY	VALID	Creation Date
<Schema name>	PR_ML_DEBUG	PROCEDURE	VALID	Creation Date
<Schema name>	FN_MODELCONEX	FUNCTION	VALID	Creation Date
<Schema name>	MLPKS_PROD_TRANSFORMATION	PACKAGE	VALID	Creation Date
<Schema name>	MLPKS_PROD_TRANSFORMATION	PACKAGE BODY	VALID	Creation Date

### 6.3.4 Validate OML4R (Previously ORE) Scripts

1. Log in to the Machine Learning schema and run the SQL query given below:

```
select * from user_rq_scripts ;
```

2. The SQL query should produce the following result:

NAME	SCRIPT
ML_FCUBS_CUSCRN_ORE_BLD	<CLOB content>
ML_FCUBS_CUSCRN_ORE_EXEC	<CLOB content>
ML_FCUBS_CUSLTV_MARKOV_ORE	<CLOB content>
ML_FCUBS_CUSSEG_ORE_BLD	<CLOB content>
ML_FCUBS_PROD_REC_ORE_BLD	<CLOB content>
ML_FCUBS_PROD_REC_ORE_EXEC	<CLOB content>
ML_FCUBS_PROD_REC_CUST_COLD_ORE_EXE	<CLOB content>

## 6.4 FLEXCUBE Validation Checkpoints

### 6.4.1 Validate database link creation

1. Log in to the Machine Learning schema and run the SQL query given below.

```
select DB_LINK,USERNAME, HOST, CREATED from user_db_links where  
DB_LINK='FCUBSML'
```

2. The SQL query should produce the following result:

DB_LINK	USERNAME	HOST	CREATED
FCUBSML.IN.ORACLE.COM	<username>	<connection string>	Creation Date

### 6.4.2 Validate database link credentials

1. Execute the following SQL query in FLEXCUBE database:

```
select param_name, param_val from MLTB_PARAM@FCUBSML
```

2. It should produce the following result:

PARAM_NAME	PARAM_VAL
LOG_REQD	N

### 6.4.3 Validate FLEXCUBE Menu

1. Execute the following SQL query in FLEXCUBE database:

```
select LANG_CODE,FUNCTION_ID,MAIN_MENU,SUB_MENU_1,SUB_MENU_2 ,  
RAD_FUNCTION_ID  
from smtb_function_description where function_id in  
( 'STDASHBC','STDASHAB','STDASHCD','STDDRMBE')
```

2. It should produce the following result:

LANG_CODE	FUNCTION_ID	MAIN_MENU	SUB_MENU_1	SUB_MENU_2	RAD_FUNCTION_ID
ENG	STDASHBC	Machine Learning Retail	Customer	Enterprise Dashboard	STDASHBC
ENG	STDASHAB	Machine Learning Retail	Customer	Branch Dashboard	STDASHAB
ENG	STDASHCD	Machine Learning Retail	Customer	Customer Query Board	STDASHCD
ENG	STDDRMBE	Machine Learning Retail	Customer	Model Execution and Control	STDDRMBE

Installer FCUBS Machine Learning Setup  
[April] [2025]  
Version 14.7.6.0.0

Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

Worldwide Inquiries:  
Phone: +91 22 6718 3000  
Fax: +91 22 6718 3001  
<https://www.oracle.com/industries/financial-services/index.html>

Copyright © [2025], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.