
PeopleTools 8.62: Integration Broker

July 2025

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://docs.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <https://docs.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <https://docs.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Contents

Preface: Preface.....	xix
Understanding the PeopleSoft Online Help and PeopleBooks.....	xix
Hosted PeopleSoft Online Help.....	xix
Locally Installed PeopleSoft Online Help.....	xix
Downloadable PeopleBook PDF Files.....	xix
Common Help Documentation.....	xix
Field and Control Definitions.....	xx
Typographical Conventions.....	xx
ISO Country and Currency Codes.....	xxi
Region and Industry Identifiers.....	xxi
Translations and Embedded Help.....	xxii
Using and Managing the PeopleSoft Online Help.....	xxii
PeopleTools Related Links.....	xxii
Contact Us.....	xxii
Follow Us.....	xxiii
Chapter 1: Getting Started with PeopleSoft Integration Broker.....	25
PeopleSoft Integration Broker Overview.....	25
Implementing PeopleSoft Integration Broker.....	25
Other Sources of Information.....	28
Chapter 2: Understanding PeopleSoft Integration Broker.....	29
Introduction to PeopleSoft Integration Broker.....	29
Web Services.....	29
Integration Gateway.....	30
Integration Engine.....	30
Integration Gateway Architecture.....	31
Architecture Elements.....	31
Connectors.....	32
Gateway Manager.....	33
Gateway Services.....	33
Integration Engine Architecture.....	34
Service Operations.....	35
Service Operation Types.....	36
Operation Types.....	36
Inbound and Outbound Request Flows.....	38
Inbound Request Flow.....	39
Outbound Request Flow.....	41
Chapter 3: Understanding Messaging.....	45
Messaging Types.....	45
Asynchronous Messaging.....	45
Brokers, Contractors and Queues.....	45
Messaging System Server Processes.....	46
Dispatchers and Handlers.....	47
Asynchronous Service Operation Publication.....	48
Asynchronous Service Operation Subscription.....	52
Synchronous Messaging.....	56
Synchronous Service Operation Publication.....	57

Synchronous Service Operation Subscription.....	58
Chapter 4: Understanding PeopleSoft Integration Broker Metadata.....	61
PeopleSoft Integration Broker Metadata.....	61
Order of Precedence for Creating Integration Metadata.....	62
Chapter 5: Understanding Supported Message Structures.....	65
Supported Message Structures.....	65
Integration Broker Message Structures.....	65
Internal Message Format for Request Messages.....	65
Internal Message Format for Response Messages.....	74
Local Compression.....	77
Accessing IBInfo Elements Using PeopleCode.....	78
PeopleSoft Rowset-Based Message Format.....	79
Understanding the PeopleSoft Rowset-Based Message Format.....	80
Rowset-Based Message Template.....	81
FieldTypes Section.....	81
MsgData Section.....	81
PSCAMA.....	82
Identifying Changes to Field-Level Attributes.....	86
PeopleSoft Timestamp Format.....	87
CDATA and Special Characters.....	87
Schema Restrictions.....	87
Rowset-Based Message Example.....	88
Nonrowset-Based Message Structures.....	89
XML Messages.....	89
SOAP-Compliant Messages.....	90
Non-XML Files.....	91
Using Nonrowset-Based Messages in Service Operations Exposed as WSDL.....	92
Message Part Structures.....	92
Understanding Message Part Structures.....	92
Rowset-Based Message Parts.....	93
Nonrowset-Based Message Parts.....	95
Message Container Structures.....	95
Example 1: XML Schema of a Container Message with Rowset-Based Message Parts.....	95
Example 2: XML Schema of a Container Message with Nonrowset-Based Message Parts.....	96
Chapter 6: Managing Messages.....	97
Understanding Managing Messages.....	97
Message Definitions.....	97
Message Types.....	97
Naming Conventions for Message Metadata.....	98
Message Record Structure.....	99
Underlying Record Definitions.....	99
Fields Defined as Uppercase.....	99
Message Aliases and Message Versions.....	99
Restrictions for Modifying Messages.....	99
Searching for Message Definitions.....	100
Creating Message Definitions.....	101
Creating Rowset Message.....	102
Creating Container Messages.....	104
Creating Nonrowset Messages.....	105
Creating Part Rowset Messages.....	106
Creating Part Nonrowset Messages.....	107

Creating Document Message Definitions.....	107
Managing Rowset-Based Messages.....	110
Understanding Managing Rowset-Based Messages.....	110
Viewing Rowset-Based Message Structures.....	111
Inserting Root Records.....	114
Inserting Child and Peer Records.....	115
Specifying Record Aliases.....	117
Deleting Records.....	117
Excluding Fields from Messages.....	117
Specifying Field Name Aliases.....	118
Including Fields in CData Sections in Generated XML.....	119
Managing XML Message Schemas for Rowset-Based Messages.....	120
Enforcing Message Record and Field Aliases in Generated WSDL.....	122
Managing Nonrowset-Based Message Definitions.....	122
Adding Message Schemas to Nonrowset-Based Messages.....	123
Editing Nonrowset-Based Schemas.....	124
Deleting Nonrowset-Based Message Schemas.....	125
Managing Message Parts.....	126
Understanding Message Parts.....	127
Creating Part Messages.....	127
Distinguishing Blank from Zero in Rowset-Based Part Messages.....	127
Reusing Rowset-Based Message Parts.....	128
Understanding Reusing Rowset-Based Message Parts.....	128
Reusing Rowset-Based Message Parts by Reference.....	128
Managing Container Messages.....	133
Understanding Managing Container Messages.....	133
Understanding Including Level 0 Rows for Message Parts in Container Messages.....	134
Adding Message Parts to Container Messages.....	135
Adding and Getting Container Messages Attributes.....	139
Generating XML Message Schemas for Container Messages.....	143
Managing Document Messages.....	144
Viewing Service Operations that Reference Messages.....	144
Resolving Inconsistencies in Exported WSDL and WADL Documents.....	145
Understanding Using Project Copy and Exported WSDL and WADL.....	146
Viewing Services Operations with Exported WSDL/WADL Inconsistencies.....	146
Clearing Exported WSDL/WADL Status Flags.....	148
Renaming and Deleting Message Definitions.....	149
Renaming Message Definitions.....	150
Deleting Message Definitions.....	151
Deleting Messages During Upgrade.....	151
Chapter 7: Sending and Receiving Messages.....	153
Understanding Sending and Receiving Messages.....	153
Prerequisites for Sending and Receiving Messages.....	153
Messaging Process Flows.....	153
Understanding Integration PeopleCode.....	155
Sending and Receiving PeopleCode.....	155
Application Classes.....	156
Routing Methods.....	157
Messaging Methods.....	160
Messaging PeopleCode.....	168
Document PeopleCode.....	168

Generating and Sending Messages.....	169
Understanding Outbound Messaging.....	169
Handling Outbound Asynchronous Message Transmission.....	171
Handling Outbound Asynchronous Request/Response Message Transmission.....	173
Handling Outbound Synchronous Transactions.....	173
Reading Exceptions for Outbound Synchronous Integrations.....	175
Overriding Synchronous Timeout Intervals at Runtime.....	175
Handling Cookies.....	176
Setting and Overriding Target Connector Properties at Runtime.....	176
Receiving and Processing Messages.....	179
Handling Inbound Asynchronous Transactions.....	179
Handling Inbound Asynchronous Request/Response Transactions.....	189
Handling Inbound Synchronous Transactions.....	190
Simulating Receiving Messages from External Nodes.....	192
Configuring Timeout for Synchronous Services.....	192
Processing Inbound Errors.....	193
Validating Data.....	193
Using the Exit Built-in Function.....	195
Using Message Object Functionality With Nonrowset-Based Messages.....	196
Using the SetXMLDoc Method.....	197
Using the GetXMLDoc Method.....	197
Generating Test Messages.....	197
Working With Message Segments.....	197
Understanding Message Segments.....	198
Understanding PeopleCode used to Work with Message Segments.....	198
Configuring Nodes to Handle Segmented Messages.....	200
Setting the Maximum Number of Message Segments in Messages.....	201
Creating Message Segments.....	201
Deleting Message Segments.....	204
Sending and Receiving Segmented Messages between PeopleSoft Systems.....	205
Sending and Receiving Segmented Messages to/from Third-Party Systems.....	205
Sending, Receiving, and Correlating Multiple Segmented Messages.....	208
Accessing Segments in Messages.....	209
Viewing Message Segment Data.....	210
Using Restartable Processing for Publishing Large Messages in Batch.....	210
Populating and Retrieving Document Data.....	212
Understanding Populating and Retrieving Document Data.....	212
Instantiating Document Objects.....	212
Populating Document Data.....	213
Retrieving Document Data.....	214
Sending and Receiving Binary Data.....	217
Understanding Sending and Receiving Binary Data.....	217
Sending MTOM-Encoded Binary Data.....	217
Receiving Binary Data.....	220
Using PeopleCode to Manage REST Service Operations.....	223
Using PeopleCode to Manage Provider REST Service Operations.....	224
Using PeopleCode to Manage Consumer REST Service Operations.....	226
Generating Fully-Qualified URLs for REST Resources.....	228
Using the Entity Registration Page.....	229
Chapter 8: Building Message Schemas.....	231
Understanding the Message Schema Builder.....	231

Message Schemas.....	231
Building, Importing, Modifying and Deleting Message Schemas.....	231
Selecting and Viewing Data in the Message Schema Builder.....	232
Selecting Data in the Message Schema Builder.....	232
Viewing Message Schema Details.....	233
Viewing XML Message Schema.....	235
Building Message Schemas for Rowset-Based Messages.....	236
Building a Message Schema for a Rowset-Based Message.....	236
Importing Message Schemas for Nonrowset-Based Messages.....	236
Importing a Message Schema for a Nonrowset-Based Message.....	236
Modifying Message Schemas.....	237
Modifying a Message Schema.....	237
Deleting Message Schemas.....	238
Understanding Deleting Message Schemas.....	238
Using the Message Schema Builder Page to Delete Message Schemas.....	238
Chapter 9: Managing Services.....	241
Understanding Managing Services.....	241
Common Elements Used to Manage Services.....	241
Accessing and Viewing Service Definitions.....	243
Accessing Service Definitions.....	243
Viewing WSDL Documents Generated for Services.....	244
Viewing Service Operation Information.....	246
Viewing Messages Defined for Service Operations.....	246
Adding Service Definitions.....	247
Understanding Naming Services and Service Aliases.....	247
Adding Service Definitions.....	247
Adding Service Operations to Service Definitions.....	249
Understanding Adding Service Operations to Service Definitions.....	249
Adding Existing Service Operations to Service Definitions.....	249
Defining New Service Operations for SOAP-Based Service Definitions.....	250
Creating and Managing Integration Groups.....	250
Understanding Integration Groups.....	251
Adding Integration Groups.....	251
Adding Services to Integration Groups.....	253
Adding Integration Subgroups.....	254
Deleting Services from Integration Groups and Integration Subgroups.....	254
Renaming and Deleting Integration Groups.....	255
Copying Integration Groups Using Project Copy.....	256
Restricting and Enabling Write Access to Service Definitions.....	256
Understanding Restricting Write Access to Service Definitions.....	257
Restricting Write Access to Service Definitions.....	257
Enabling Write Access to Service Definitions.....	258
Renaming and Deleting Service Definitions.....	259
Renaming Service Definitions.....	259
Deleting Service Definitions.....	260
Activating and Deactivating Service Definitions in Bulk.....	260
Chapter 10: Managing Service Operations.....	265
Understanding Managing Service Operations.....	265
Service Operations.....	265
Services Operation Types.....	265
Naming Conventions for Service Operation Metadata.....	266

Service Operation Aliases.....	266
Service Operation Versions.....	266
Monitoring Service Operations.....	267
Accessing and Viewing Service Operation Definitions.....	267
Accessing Service Operation Definitions.....	268
Viewing Service Operation Definitions.....	269
Adding Service Operation Definitions.....	272
Configuring Service Operation Definitions.....	272
Specifying General Service Operation Information.....	273
Defining Service Operation Version Information.....	273
Adding Handlers to Service Operations.....	276
Adding Routing Definitions.....	276
Activating and Inactivating Routing Definitions.....	276
Setting Permissions to Service Operations.....	277
Understanding Setting Permission to Service Operations.....	277
Setting Permission Access to Service Operations.....	277
Managing Service Operation Versions.....	277
Creating Service Operation Versions.....	278
Using Non-Default Service Operation Versions.....	278
Attaching Files to Service Operations.....	279
Understanding Attaching Files to Service Operations.....	279
Using the FTP Attachment Utility.....	279
Sending Attachment Information with Service Operations.....	280
Processing Attachment Information Included in Service Operations.....	281
Assigning Multiple Queues to Process Service Operations.....	282
Understanding Assigning Multiple Queues to Process Service Operations.....	282
Enabling Multi-Queue Service Operation Processing.....	282
Specifying Multiple Queues to Process Service Operations.....	282
Invoking Multiple Service Operations.....	284
Renaming and Deleting Service Operations.....	284
Renaming Service Operations.....	285
Deleting Service Operations.....	286
Chapter 11: Managing REST Services.....	287
Understanding Managing REST Services.....	287
Common Elements Used to Manage REST Services.....	287
Accessing and Viewing REST Service Definitions.....	289
Accessing REST Service Definitions.....	290
Viewing WADL Documents for REST Services.....	292
Viewing OpenAPI Documents for REST Services.....	294
Viewing REST Service Operation Information.....	296
View Messages Defined for REST Service Operations.....	297
Adding REST Service Definitions.....	298
Understanding Naming Services and Service Aliases for REST Service Definitions.....	298
Adding REST Service Definitions.....	298
Restricting and Enabling Write Access to REST Service Definitions.....	300
Renaming and Deleting REST Service Definitions.....	300
Activating and Deactivating REST Service Definitions in Bulk.....	300
Chapter 12: Managing REST Service Operations.....	301
Understanding REST Service Operations.....	301
REST Service Operations Types.....	301
REST Methods.....	301

REST Resource Definitions.....	302
REST Messages.....	302
Naming Conventions for REST Service Operation Metadata.....	304
REST Service Operation Aliases.....	304
REST Service Operation Versions.....	304
WADL Node.....	304
Monitoring REST Service Operations.....	305
Accessing REST Service Operations.....	305
Viewing REST Service Operation Definitions.....	306
Viewing General Service Operation Information.....	307
Viewing the REST Resource Definition and Default Service Operation Version for Open	
API Rest Service Operation.....	307
Viewing REST Resource Definition and Default Service Operation Version.....	309
Viewing Handler Page.....	310
Viewing Routings Page.....	312
Adding REST Service Operations.....	313
Invoking the HEAD Method for REST Consumer Service Using GET.....	315
Defining General REST Service Operation Details.....	315
Describing REST Resource Definitions.....	317
Understanding REST Resource Definition Concepts.....	317
Understanding URI Template Expressions and Expansions.....	319
Prerequisites for Managing REST Resource Definitions.....	321
Defining REST Base URLs.....	321
Managing REST Resource Definitions for Open API REST Service.....	323
Adding and Removing Root Resources.....	323
Building the URI Template.....	324
Entering Details for the URI Template.....	326
Managing REST Resources.....	327
Building URI Templates Manually.....	328
Using the URI Template Builder.....	329
Building the URI Template Example.....	332
Validating URI Templates.....	335
Defining REST Service Operation Version Information.....	339
Understanding Default REST Service Operations.....	339
Defining Default REST Service Operation Versions.....	340
Defining Message Instances for REST Service Operations.....	340
Defining Fault Messages for REST Service Operations.....	342
Managing REST Service Operation Versions.....	344
Managing Provider REST Service Operations.....	344
Managing Target Connectors for Provider REST Service Operations.....	345
Managing Messages for Provider REST Service Operations.....	345
Securing Provider REST Service Operations.....	345
Adding Handlers to Provider REST Services Operations.....	346
Managing Routing Definitions for Provider REST Service Operations.....	346
Defining Properties for Provider REST Service Operation Application Class.....	347
Defining Routing Header Properties for Provider REST Service Operations.....	348
Managing Consumer REST Service Operations.....	350
Adding Handlers to Consumer REST Service Operations.....	350
Compressing Data for Consumer REST Service Operations.....	350
Manage Routing Definitions for Consumer REST Service Operations.....	350
Securing Consumer REST Service Operations.....	351

Sending and Receiving Binary Data for Consumer REST Service Operations.....	354
Setting Compression for REST Service Operations.....	355
Understanding Setting Compression for REST Service Operations.....	355
Setting Compression for Provider REST Service Operations.....	355
Defining Compression for Consumer REST Service Operations.....	357
Renaming and Deleting REST Service Operations.....	359
Chapter 13: Managing Service Operation Queues.....	361
Understanding Service Operation Queues.....	361
Adding Queue Definitions.....	361
Applying Queue Partitioning.....	363
Understanding Queue Partitioning.....	363
Selecting Partitioning Fields.....	364
Renaming and Deleting Queues.....	365
Renaming Queue Definitions.....	366
Deleting Queue Definitions.....	367
Deleting Queues During Upgrade.....	367
Using the Queue Prioritization Page.....	367
Chapter 14: Enabling Runtime Message Schema Validation.....	369
Understanding Message Schema Validation.....	369
Message Schema Validation.....	369
Message Schema Validation and Transformations.....	369
Message Schema Validation and Part Messages.....	369
Prerequisites for Validating Message Schemas.....	370
Selecting Service Operations.....	370
Selecting a Service Operation.....	370
Viewing Defined Message Schemas.....	372
Viewing XML Schemas Defined for Messages.....	372
Enabling Runtime Message Schema Validation.....	373
Using the Service Schema Validation Page to Enable Runtime Message Schema Validation.....	373
Using the Service Operations page to Enable Runtime Message Schema Validation.....	374
Chapter 15: Creating Component Interface-Based Services.....	375
Understanding Creating Component Interface-Based Services.....	375
Naming Conventions Integration Metadata Created.....	375
User-Defined Method Restrictions.....	376
Impact of Changing Component Interfaces.....	377
Prerequisites for Creating Component Interface-Based Services.....	377
Selecting Component Interfaces to Expose as Services.....	377
Selecting Component Interface Methods to Include as Service Operations.....	378
Generating Component Interface-Based Services.....	381
Generating Services and Service Operations from Component Interface Methods.....	381
Inheriting Component Interface Security Permission Lists.....	383
Adding Message Names and Descriptions to Generated Service Operations.....	384
Viewing Component Interface-Based Service Definitions.....	384
Chapter 16: Creating Component Interface-Based REST Services.....	387
Understanding Creating Component Interface-Based REST Services.....	387
Naming Conventions Created by Integration Metadata.....	387
Impact of Changing Component Interfaces.....	388
Prerequisites for Creating Component Interface-Based REST Services.....	388
Selecting Component Interfaces to Expose as REST Services.....	388
Selecting Component Interface Methods to Include as REST Service Operations.....	390
Generating Component Interface-Based REST Services.....	392

Generating REST Services and Service Operations from Component Interface Methods.....	393
Inheriting Component Interface Security Permission Lists.....	394
Adding Message Names and Descriptions to Generated Service Operations.....	395
Viewing Component Interface-Based REST Service Definitions.....	396
Chapter 17: Managing Service Operation Handlers.....	401
Understanding Service Operation Handlers.....	401
Service Operation Handler Types.....	401
Handler Types and Messaging Types.....	401
Understanding Implementing Handlers.....	403
Adding Handlers to Service Operations.....	404
Understanding Adding Handler Definitions to Service Operations.....	404
Adding a Handler to a Service Operation.....	405
Specifying General Handler Details.....	406
Implementing Handlers Using Application Classes.....	407
Understanding Implementing Handlers Using Application Classes.....	407
Developing Application Classes for Implementing Handlers.....	407
Specifying Application Class Implementation Details.....	409
Implementing Handlers Using Application Engine Programs.....	410
Understanding Implementing Handlers Using Application Engine Programs.....	410
Specifying Application Engine Handler Implementation Details.....	411
Retrieving Service Operation Content from Application Engine Programs.....	412
Viewing Subscription Contract Status.....	412
Implementing Handlers Using Component Interfaces.....	414
Understanding Implementing Handlers Using Component Interfaces.....	414
Specifying Component Interface Handler Implementation Details.....	414
Implementing Handlers Using Bulk Load Processing.....	415
Understanding Implementing Handlers Using the Bulk Load Handler.....	415
Enabling Transactional Rollback.....	417
Enabling Table Truncation.....	418
Specifying XML Record Attribute Values.....	418
Adding Data Structures for Nonrowset-Based Messages.....	419
Implementing Handlers Using Deprecated PeopleCode Handlers.....	421
Understanding the Deprecated PeopleCode Handler.....	421
Deleting Deprecated PeopleCode Handlers.....	421
Chapter 18: Managing Service Operation Routing Definitions.....	423
Understanding Routing Definitions.....	423
Routing Definitions.....	423
Routing Types.....	423
Defining Routing Definitions.....	424
Methods for Generating and Defining Routing Definitions.....	424
Routing Definition Naming Conventions.....	425
Routing Definition External Aliases.....	426
Service Operation Mapping.....	426
Graphical Routings View.....	427
Integration Status.....	427
Managing System-Generated Routing Definitions.....	427
Understanding Managing System-Generated Routing Definitions.....	427
Viewing System-Generated Routing Definition Status.....	428
Initiating System-Generated Routing Definitions.....	428
Regenerating System-Generated Routing Definitions.....	430
Adding Routing Definitions.....	430

Understanding Adding Routing Definitions.....	431
Adding Routing Definitions Using the Routings Component.....	431
Adding Routing Definitions From Service Operation Definitions.....	432
Adding Routing Definitions Using the Nodes Component.....	433
Configuring Routing Definitions.....	434
Defining General Routing Information.....	434
Defining Routing Parameters.....	439
Defining and Overriding Gateway and Connector Properties.....	446
Defining Routing Properties.....	448
Activating and Inactivating Routing Definitions.....	450
Understanding Activating and Inactivating Routing Definitions.....	450
Activating and Inactivating Routing Definitions in the Routing Component.....	450
Activating and Inactivating Routing Definitions in the Service Operations Component.....	450
Activating and Inactivating Routing Definitions in the Nodes Component.....	450
Viewing Routing Definitions in Graphical Format.....	451
Common Elements Used to View Routing Definitions in Graphical Format.....	451
Viewing a Routing Definition in Graphical Format.....	453
Viewing Integration Status and Activating Integration Metadata.....	455
Understanding Viewing Integration Status and Activating Integration Metadata.....	455
Viewing Inactive Integration Metadata.....	455
Activating Integration Metadata Using the Integration Status Page.....	455
Retrieving Routing Properties Programmatically.....	456
Configuring Routing Definitions for Deployment.....	457
Understanding Configuring Routing Definitions for Deployment.....	457
Understanding Using Routing Deployment Configuration.....	457
Using the Deployment Configuration Page.....	458
Using the Routing Deployment Grids.....	460
Using the Get Routing Information Page.....	465
Selecting Routing Definitions for Routing Deployment Configuration.....	466
Populating Deployment Configurations from Routing Definitions.....	466
Adding Routing Definitions for Deployment.....	467
Updating Release Levels.....	468
Searching for Duplicate External Routing Aliases.....	468
Renaming and Deleting Routing Definitions.....	469
Renaming Routing Definitions.....	470
Deleting Routing Definitions.....	471
Deleting Duplicate Routing Definitions.....	471
Chapter 19: Applying Filtering, Transformation and Translation.....	473
Understanding Filtering, Transformation, and Translation.....	473
Understanding Transform Programs.....	473
Transform Programs.....	474
Transformation Programming Languages.....	475
Third-Party Considerations.....	475
Defining Transform Programs.....	476
Understanding Defining Transform Programs.....	476
Defining a Transform Program.....	477
Developing Transform Programs Using PeopleSoft Application Engine.....	478
Understanding Developing Transform Programs Using PeopleSoft Application Engine.....	479
Inserting Steps and Actions into Transform Programs.....	479
Making Working Storage Data Available Globally.....	480
Preserving Record and Field Aliases.....	481

Tracing Transform Programs.....	482
Developing Transforms Using Oracle XSL Mapper.....	483
Understanding Oracle XSL Mapper.....	483
Development Considerations.....	483
Prerequisites for Developing Transforms Using Oracle XSL Mapper.....	483
Installing Oracle XSL Mapper.....	484
Specifying the Installation Path and Classpath for Oracle XSL Mapper.....	484
Launching Oracle XSL Mapper.....	485
Accessing Oracle JDeveloper Documentation and Online Resources.....	487
Navigating in Oracle XSL Mapper.....	487
Mapping Records and Fields.....	490
Deleting Record and Field Maps.....	491
Viewing Raw XSLT Code.....	491
Testing XSL Maps.....	491
Adding and Modifying XSL Map Code.....	493
Developing Transform Programs Using the XSLT Transform Builder.....	494
Understanding the XSLT Transform Builder.....	494
Understanding Using Oracle XSL Mapper to Build Transformation Programs in the XSLT Transform Builder.....	494
Prerequisites for Using the XSLT Transform Builder.....	495
Navigating the XSLT Transform Builder.....	496
Adding Transformation Programs to the XSLT Transform Builder.....	499
Defining Transformation Program Metadata Properties.....	499
Manually Building Transformation Programs in the XSLT Transform Builder.....	499
Using the Oracle XSLT Mapper to Build Transformation Programs in the XSLT Transform Builder.....	500
Invoking Transform Programs.....	500
Accessing Transform Message Data.....	500
Renaming or Deleting Transform Programs.....	503
Filtering Messages.....	503
Understanding Message Filtering.....	503
PeopleCode Filtering Example.....	504
Applying Transformations.....	505
Understanding Transformation.....	505
Using XSLT for Transformation.....	505
Applying Message Transformations at the Integration Gateway.....	507
Understanding Applying Message Transformations at the Integration Gateway.....	507
Developing and Implementing Gateway-Based Transformation Programs.....	507
Setting Integration Gateway Properties for Gateway-Based Transformations.....	508
Understanding Logged Errors.....	510
Performing Data Translation.....	511
Understanding Data Translation.....	511
Defining Codeset Groups.....	513
Defining Codesets.....	514
Defining Codeset Values.....	515
Importing and Exporting Codesets Between Databases.....	517
Deleting Codesets.....	517
Using XSLT for Data Translation.....	518
XSLT Translation Example.....	520
PeopleCode Translation Example.....	522
Rejecting Transformation Programs.....	523

Terminating Transformation Programs.....	524
Chapter 20: Managing Error Handling, Logging, Tracing, and Debugging.....	525
Understanding Error Handling, Logging, Tracing and Debugging.....	525
Understanding Integration Gateway Error Handling.....	525
Target Connector Error Handling.....	525
Listening Connector Error Handling.....	525
Integration Gateway Exception Types.....	526
Managing Integration Gateway Message and Error Logging.....	527
Understanding Message and Error Logging.....	528
Setting Up Message and Error Logging.....	528
Viewing Non-English Characters in Integration Gateway Log Files.....	528
Managing Message Logging.....	528
Managing Error Logging.....	530
Managing Application Server Logging and Tracing.....	531
Debugging Integrations.....	532
Debugging Handler PeopleCode.....	532
Handling Common Issues.....	533
Chapter 21: Providing Services.....	537
Understanding Providing Web Services.....	537
Understanding Providing WSDL Documents.....	537
WSDL Features.....	537
WSDL Document Specifications.....	537
Supported Operation Types for WSDL Documents.....	538
Requirements for Nonrowset-Based Message Schemas.....	538
Locations for Publishing WSDL Documents.....	539
UDDI Repositories and Endpoints.....	539
WSDL URL Formats.....	539
Provided WSDL Documents.....	540
PartnerLinkType Support.....	548
Understanding WADL Documents.....	550
Supported Operation Types for WADL Documents.....	550
Locations for Publishing WADL Documents.....	550
WADL URL Format.....	551
Provided WADL Documents.....	551
WSDL Document and WADL Document Versioning.....	555
Understanding OpenAPI Documents.....	555
Locations for Publishing OpenAPI Documents.....	555
OpenAPI URL Format.....	555
Prerequisites for Providing Services.....	556
Common Elements Used to Provide Services.....	557
Providing Non-REST Web Services.....	557
Step 1: Select Services.....	558
Step 2: Select Service Operations.....	559
Step 3 View WSDL.....	559
Step 4: Specify Publishing Options.....	561
Step 5: View the WSDL Generation Log.....	564
Providing REST Web Services.....	565
Step 1: Select Services.....	565
Step 2: Select Service Operations.....	567
Step 3 View WADL.....	567
Step 4: Specify Publishing Options.....	569

Step 5: Confirm Results.....	569
Providing OpenAPI REST Web Services.....	570
Step 1: Select Services.....	571
Step 2: Select Service Operations.....	572
Step 3 View WADL/OpenAPI.....	573
Step 4: Specify Publishing Options.....	574
Step 5: Confirm Results.....	575
Accessing Generated Web Service Documents.....	576
Deleting Web Service Documents.....	576
Chapter 22: Consuming Services.....	579
Understanding Consuming Services.....	579
Understanding the Consume Web Service Wizard.....	579
Consume Web Service Wizard Features.....	579
Operation Types Supported.....	579
Sources for Consuming WSDL Document.....	579
Integration Metadata Created by the Consume Web Service Wizard.....	580
Messages Generated.....	582
Fault Messages.....	582
Multiple Root Elements in Message Schemas.....	582
Delivered Queues and Nodes.....	583
Binding Style of Consumed WSDL Documents.....	583
Working with Asynchronous Request/Response Service Operations.....	583
Prerequisites for Consuming Services.....	583
Common Elements Used to Consume Services.....	584
Using the Consume Web Service Wizard.....	585
Step 1: Select WSDL Source.....	585
Step 2: Select Service.....	587
Step 3: Select Service Ports.....	588
Step 4: Select Service Operations.....	589
Step 5: Convert Asynchronous Operations.....	589
Step 6: Rename Operation Messages.....	591
Step 7: Select a Queue for Asynchronous Operations.....	593
Step 8: Select the Receiver Node.....	594
Confirm and View Results.....	594
Accessing Integration Metadata for Consumed Services.....	595
Chapter 23: Integrating with Oracle Mediator and Oracle ESB-Based Services.....	597
Understanding Integrating with Oracle Mediator and Oracle ESB-Based Services.....	597
Oracle Mediator and Oracle ESB.....	597
Software Components.....	597
Securing Oracle Mediator and Oracle ESB-Based Services.....	598
Prerequisites for Integrating with Oracle Mediator/ESB-Based Services.....	599
Consuming and Invoking Oracle Mediator/ESB-Based Services.....	600
Understanding Consuming and Invoking Oracle Mediator/ESB-Based Services.....	600
Providing Oracle Mediator/ESB-Based Services for Consuming in PeopleSoft.....	603
Consuming Oracle Mediator/ESB-Based Services.....	603
Invoking Synchronous Oracle Mediator/ESB-Based Services.....	604
Invoking Asynchronous Oracle Mediator/ESB-Based Services.....	605
Invoking Asynchronous Request/Response Oracle Mediator-Based Services.....	609
Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB.....	610
Understanding Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB.....	610
Prerequisites for Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB.....	610

Providing PeopleSoft Services.....	611
Invoking PeopleSoft Services in Oracle Mediator/ESB.....	611
Chapter 24: Using the Inbound File Loader Utility.....	613
Understanding the Inbound File Loader Utility.....	613
File Processing.....	613
Understanding Development Activities.....	614
General Development Activities.....	615
Development Activities for PeopleSoft Integration Broker Processing.....	615
Creating File Layout Definitions.....	616
Development Activities for Application Class Processing.....	616
Prerequisites for Using the Inbound File Loader Utility.....	618
Setting Up Inbound File Loader Processing Rules.....	619
Understanding Setting Up Inbound File Loader Processing Rules.....	619
Setting Up Inbound File Loader Processing Rules.....	619
Initiating File Processing.....	622
Understanding Initiating File Processing.....	622
Initiating Inbound Flat File Processing.....	623
Testing Inbound Flat File Processing.....	625
Chapter 25: Using the Application Services Framework.....	627
Understanding the Application Services Framework.....	627
Generic Naming Standards.....	627
Chapter 26: Managing Application Services.....	629
Searching for Application Service.....	629
Creating Application Class.....	629
Creating a New Provider Application Service.....	633
Creating the Provider Application Service.....	634
Creating Root Resource.....	636
Importing Root Resource.....	638
Creating a New Consumer Application Service.....	639
Creating the Consumer Application Service.....	639
Setting Security Details.....	641
Creating Root Resource.....	643
Example: Invoking a Consumer Application Service.....	646
Setting Data Compression for Consumer Application Service.....	647
Adding URI Templates.....	647
Building the URI Template.....	648
Validating URI Template.....	650
Adding Method to the URI Template for Provider Application Services.....	651
Adding Method to the URI Template for Consumer Application Service.....	656
Using the GET Method to Invoke HEAD.....	660
Adding Input and Output Parameters.....	660
Defining Headers.....	665
Defining Result States For Provider Application Service.....	666
Creating Service Alias.....	668
Adding Reusable Base Parameters.....	671
Selecting Document Parameter.....	673
Supplying JSON Schema.....	674
Adding Base Template Parameters.....	678
Using Application Service Summary.....	679
Chapter 27: Administering Application Services.....	683
Setting Application Services Security.....	683

Activating Application Services.....	688
Deleting Application Services.....	690
Exporting Application Services.....	691
Exporting Chatbots.....	697
Viewing Chatbot Discovery.....	700
Chapter 28: Using Application Service Utilities.....	703
Converting Chatbot Services.....	703
Using the Chatbot Conversion Utility.....	703
Converting Chatbot Service.....	704
Mapping Service Application.....	705
Backporting Chatbot.....	706
Cleaning Up Chatbots.....	707
Updating Converted Application Services for Compliance.....	707
Chapter 29: Copying Integration Metadata between PeopleSoft Databases.....	709
Copying Integration Metadata Between PeopleSoft Databases.....	709
Understanding Copying Integration Metadata Between PeopleSoft Databases.....	709
Understanding Data Dependencies and Relationships for Copying Data.....	709
Using Data Mover Scripts to Copy Message Schema and WSDL Data.....	712
Converting WSDL Documents and Message Schemas to Managed Objects.....	713
Understanding Converting WSDL Documents and Message Schema to Managed Objects.....	713
Using the Metadata Convert/Schema Convert Page.....	714
Converting WSDL Documents to Managed Objects.....	715
Converting Message Schemas to Managed Objects.....	715
Deleting Data from the Deprecated Data Repository.....	716
Managing Nodes Copied Between Databases and Upgraded from Earlier PeopleTools Releases.....	717
Chapter 30: Integration Scenarios.....	719
Understanding the Integration Scenarios.....	719
Understanding Integration Setup for the Integration Scenarios.....	719
Integrating with PeopleSoft Integration Broker Systems.....	723
Understanding This Scenario.....	724
Configuring the System for This Scenario.....	724
Integrating with PeopleSoft Integration Broker Systems Through Firewalls.....	726
Understanding This Scenario.....	726
Configuring the System for This Scenario.....	728
Integrating with PeopleSoft Integration Broker Systems by Using Hubs.....	730
Understanding This Scenario.....	730
Understanding Hub Routing Types.....	731
Configuring Generic-Routing Hubs.....	732
Configuring Sender-Specified Routing Hubs.....	734
Integrating with Third-Party Systems.....	737
Understanding This Scenario.....	737
Configuring the System for This Scenario.....	738
Integrating with Third-Party Systems by Using Remote Gateways.....	739
Understanding This Scenario.....	740
Sending Messages to Third-Party Systems.....	742
Receiving Messages from Third-Party Systems.....	744
Integrating with PeopleTools 8.47 and Earlier PeopleTools 8.4x Systems.....	747
Understanding This Scenario.....	747
Configuring the System for This Scenario.....	748
Integrating with PeopleTools 8.1x Systems.....	749
Understanding This Scenario.....	749

Configuring the System for This Scenario.....	750
Chapter 31: Transformation Example: Integration Between Two PeopleSoft Nodes.....	753
Understanding the Transformation Example.....	753
Using the Example.....	753
Integration Metadata for This Example.....	753
Creating Message Definitions.....	754
Message Definition: PeopleSoft SCM Node.....	754
Message Definition: PeopleSoft CRM Node.....	755
Setting Up the Codesets.....	756
Setting Up the Transformation.....	758
XSL Walkthrough.....	760
Transformation Processing: First Pass.....	760
Transformation Processing: Second Pass.....	763
Testing the Transformation.....	763
Chapter 32: Understanding Migrated Integration Metadata.....	765
Understanding Migrated Integration Metadata.....	765
Node Objects.....	765
Channel Objects.....	765
Message Objects.....	766
Node Transaction and Relationship Objects.....	766
Understanding Migrated Integration PeopleCode.....	767
Application Classes.....	768
PeopleCode Methods.....	768
Built-In Functions.....	769
Other Migrated Constructs.....	769
Special Characters.....	769
Correcting Integration PeopleCode That Did Not Migrate.....	769
Understanding Integration PeopleCode That Did Not Migrate.....	770
Correcting Non-Migrated Integration PeopleCode.....	770
Chapter 33: Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables.....	773
Understanding Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables.....	773
Setting PS_FILEDIR and PS_TREEBASEDIR in Microsoft Windows Environments.....	773
Setting PS_FILEDIR and PS_TREEBASEDIR in UNIX Environments.....	774

Preface

Understanding the PeopleSoft Online Help and PeopleBooks

The PeopleSoft Online Help is a website that enables you to view all help content for PeopleSoft applications and PeopleTools. The help provides standard navigation and full-text searching, as well as context-sensitive online help for PeopleSoft users.

Hosted PeopleSoft Online Help

You can access the hosted PeopleSoft Online Help on the [Oracle Help Center](#). The hosted PeopleSoft Online Help is updated on a regular schedule, ensuring that you have access to the most current documentation. This reduces the need to view separate documentation posts for application maintenance on My Oracle Support. The hosted PeopleSoft Online Help is available in English only.

To configure the context-sensitive help for your PeopleSoft applications to use the Oracle Help Center, see [Configuring Context-Sensitive Help Using the Hosted Online Help Website](#).

Locally Installed PeopleSoft Online Help

If you're setting up an on-premises PeopleSoft environment, and your organization has firewall restrictions that prevent you from using the hosted PeopleSoft Online Help, you can install the online help locally. Installable PeopleSoft Online Help is made available with selected PeopleSoft Update Images and with PeopleTools releases for on-premises installations, through the [Oracle Software Delivery Cloud](#).

Your installation documentation includes a chapter with instructions for how to install the online help for your business environment, and the documentation zip file may contain a README.txt file with additional installation instructions. See *PeopleSoft 9.2 Application Installation* for your database platform, "Installing PeopleSoft Online Help."

To configure the context-sensitive help for your PeopleSoft applications to use a locally installed online help website, see [Configuring Context-Sensitive Help Using a Locally Installed Online Help Website](#).

Downloadable PeopleBook PDF Files

You can access downloadable PDF versions of the help content in the traditional PeopleBook format on the [Oracle Help Center](#). The content in the PeopleBook PDFs is the same as the content in the PeopleSoft Online Help, but it has a different structure and it does not include the interactive navigation features that are available in the online help.

Common Help Documentation

Common help documentation contains information that applies to multiple applications. The two main types of common help are:

- Application Fundamentals

- Using PeopleSoft Applications

Most product families provide a set of application fundamentals help topics that discuss essential information about the setup and design of your system. This information applies to many or all applications in the PeopleSoft product family. Whether you are implementing a single application, some combination of applications within the product family, or the entire product family, you should be familiar with the contents of the appropriate application fundamentals help. They provide the starting points for fundamental implementation tasks.

In addition, the *PeopleTools: Applications User's Guide* introduces you to the various elements of the PeopleSoft Pure Internet Architecture. It also explains how to use the navigational hierarchy, components, and pages to perform basic functions as you navigate through the system. While your application or implementation may differ, the topics in this user's guide provide general information about using PeopleSoft applications.

Field and Control Definitions

PeopleSoft documentation includes definitions for most fields and controls that appear on application pages. These definitions describe how to use a field or control, where populated values come from, the effects of selecting certain values, and so on. If a field or control is not defined, then it either requires no additional explanation or is documented in a common elements section earlier in the documentation. For example, the Date field rarely requires additional explanation and may not be defined in the documentation for some pages.

Typographical Conventions

The following table describes the typographical conventions that are used in the online help.

<i>Typographical Convention</i>	<i>Description</i>
Key+Key	Indicates a key combination action. For example, a plus sign (+) between keys means that you must hold down the first key while you press the second key. For Alt+W , hold down the Alt key while you press the W key.
. . . (ellipses)	Indicate that the preceding item or series can be repeated any number of times in PeopleCode syntax.
{ } (curly braces)	Indicate a choice between two options in PeopleCode syntax. Options are separated by a pipe ().
[] (square brackets)	Indicate optional items in PeopleCode syntax.
& (ampersand)	When placed before a parameter in PeopleCode syntax, an ampersand indicates that the parameter is an already instantiated object. Ampersands also precede all PeopleCode variables.

<i>Typographical Convention</i>	<i>Description</i>
⇒	This continuation character has been inserted at the end of a line of code that has been wrapped at the page margin. The code should be viewed or entered as a single, continuous line of code without the continuation character.

ISO Country and Currency Codes

PeopleSoft Online Help topics use International Organization for Standardization (ISO) country and currency codes to identify country-specific information and monetary amounts.

ISO country codes may appear as country identifiers, and ISO currency codes may appear as currency identifiers in your PeopleSoft documentation. Reference to an ISO country code in your documentation does not imply that your application includes every ISO country code. The following example is a country-specific heading: "(FRA) Hiring an Employee."

The PeopleSoft Currency Code table (CURRENCY_CD_TBL) contains sample currency code data. The Currency Code table is based on ISO Standard 4217, "Codes for the representation of currencies," and also relies on ISO country codes in the Country table (COUNTRY_TBL). The navigation to the pages where you maintain currency code and country information depends on which PeopleSoft applications you are using. To access the pages for maintaining the Currency Code and Country tables, consult the online help for your applications for more information.

Region and Industry Identifiers

Information that applies only to a specific region or industry is preceded by a standard identifier in parentheses. This identifier typically appears at the beginning of a section heading, but it may also appear at the beginning of a note or other text.

Example of a region-specific heading: "(Latin America) Setting Up Depreciation"

Region Identifiers

Regions are identified by the region name. The following region identifiers may appear in the PeopleSoft Online Help:

- Asia Pacific
- Europe
- Latin America
- North America

Industry Identifiers

Industries are identified by the industry name or by an abbreviation for that industry. The following industry identifiers may appear in the PeopleSoft Online Help:

- USF (U.S. Federal)

- E&G (Education and Government)

Translations and Embedded Help

PeopleSoft 9.2 software applications include translated embedded help. With the 9.2 release, PeopleSoft aligns with the other Oracle applications by focusing our translation efforts on embedded help. We are not planning to translate our traditional online help and PeopleBooks documentation. Instead we offer very direct translated help at crucial spots within our application through our embedded help widgets. Additionally, we have a one-to-one mapping of application and help translations, meaning that the software and embedded help translation footprint is identical—something we were never able to accomplish in the past.

Using and Managing the PeopleSoft Online Help

Select About This Help in the left navigation panel on any page in the PeopleSoft Online Help to see information on the following topics:

- Using the PeopleSoft Online Help.
- Managing hosted Online Help.
- Managing locally installed PeopleSoft Online Help.

PeopleTools Related Links

[PeopleTools 8.62 Home Page](#)

[PeopleSoft Search and Insights Home Page](#)

“PeopleTools Product/Feature PeopleBook Index” (Getting Started with PeopleTools)

[PeopleSoft Online Help](#)

[PeopleSoft Information Portal](#)

[PeopleSoft Spotlight Series](#)

[PeopleSoft Training and Certification | Oracle University](#)

[My Oracle Support](#)

[Oracle Help Center](#)

Contact Us

Send your suggestions to pssoft-infodev_us@oracle.com.

Please include the applications update image or PeopleTools release that you’re using.

Follow Us

<i>Icon</i>	<i>Link</i>
	<u>Watch PeopleSoft on YouTube</u>
	<u>Follow @PeopleSoft_Info on X.</u>
	<u>Read PeopleSoft Blogs</u>
	<u>Connect with PeopleSoft on LinkedIn</u>

Chapter 1

Getting Started with PeopleSoft Integration Broker

PeopleSoft Integration Broker Overview

This subject describes using PeopleSoft Integration Broker to:

- Perform asynchronous and synchronous messaging among internal systems and third-party systems.
- Expose PeopleSoft business logic as web services to PeopleSoft and third-party systems.
- Consume and invoke web services from third-party and PeopleSoft systems.

Implementing PeopleSoft Integration Broker

This section provides information to consider before you begin to use PeopleSoft Integration Broker.

Planning the Integration Architecture

The two major components of PeopleSoft Integration Broker are the integration gateway and the integration engine. The integration gateway is a platform that manages the receipt and delivery of messages passed among systems through PeopleSoft Integration Broker. The integration engine is an application server process that routes messages to and from PeopleSoft applications as well as transforms the structure of messages and translates data according to specifications that you define.

When planning the integration architecture, evaluate historical integration data, current data, as well as expected growth and increased traffic. Consider the number of interfaces you have in production and how much system resources they use. Also consider how many of the interfaces will be nightly batch file loads, versus how many will be real-time service-based integrations. Devise simulated real-life integration scenarios where you can estimate the volume and the size of the transactions to a certain degree. Then use this information for benchmarking and stress testing—which should lead to performance tuning, hardware sizing, and so on.

Planning Integrations

In planning the integrations to develop and execute, consider the following:

- Real-time integrations or scheduled integrations.

Determine if your business needs are best served with real-time integration or scheduled integrations.

Scheduled batch processing and file loads are discussed in other PeopleTools subjects.

See the product documentation for [Process Scheduler](#) and [Application Engine](#).

- Inventory the integrations to develop.

Determine the systems and applications that will participate in each integration.

Consider dependencies on other systems owned by other groups having concurrent releases, and data dependencies within the context of synchronizing data between systems. Also consider if you will need permission from business owners to integrate with their systems.

- Generic integrations.

Consider if you can develop generic integrations. Perhaps in your current environment only two systems need to exchange information and they do so in a proprietary way. But consider that one day perhaps additional systems in your enterprise may also need to exchange that information with the source system. Will you need to develop transformations for systems that will be integrating later on? Can you develop the integration in a way so that other systems will be able to consume the service or subscribe to the information without requiring complex transformations?

- Determine the integrations that will require synchronous messaging and those that will asynchronous messaging.

In PeopleSoft Integration Broker synchronous integrations, all processing stops until a response is received. In PeopleSoft Integration Broker asynchronous integrations, each request is placed in a queue and is processed as soon as the system can accommodate the request.

Perhaps you may need to stop the processing of fulfilling an order until the system verifies that all requested items are available in inventory. In such a case, a synchronous integration is needed.

However the processing of support tickets probably should not stop if a system uses integration to add a new ticket to a queue. In such a scenario, an asynchronous integration might be appropriate.

- Prioritize integration development.

Plan to develop mission-critical integrations first, standard integrations next, and nice-to-have integrations last.

- Determine if data will need transformation or translation.
- Plan on using integration simulation tools.

Plan on using simulation tools such as PeopleSoft Send Master to simulate integrations with external systems that are not under your control. Even when you do control all systems that are being integrated, if you can't get the integration to work using Send Master, you definitely won't be able to get it working from the external system. Test integrations using Send Master before spending hours debugging a system.

See "Understanding Send Master" (Integration Broker Testing Utilities and Tools).

Determining Security

Unlike a public web service on the internet that retrieves a stock quote for a given ticker symbol, the web services and integrations in your PeopleSoft applications can expose sensitive information such as financial data. PeopleSoft Integration Broker facilitates transfer of information between systems; however, a security analyst must evaluate security requirements for each individual integration.

For example, security requirements might differ when interfacing with credit card processing vendors, versus publishing salary information out of human resources, versus synchronizing business units between applications, and so on.

Perhaps certain information should be available to the public, including systems outside of your company, such as how many inventory items are available for sale. Other information might be restricted to internal employees only, internal application systems only, or perhaps only certain users of a particular application system.

PeopleSoft Integration Broker allows you to secure each individual integration to the level of security required, as well as all integration data flowing over the wire.

Planning for Support

Develop a support plan for after “go-live.” In doing so, consider the following:

- Determine who in your organization will support integration development and administration.
- Determine the type of error-notification and exception handling to implement to meet your support requirements. Consider that while system administrators can resolve communication failure between machines, they may not be able to resolve errors resulting from one system transmitting bad data to another. Analyst intervention may be required to correct the data. Stronger validation at point of data entry will result in fewer calls to a functional analyst to resolve integration issues.

Assessing Staff Skills

Assess the skills of the people who will perform development and administrative functions.

Developers working on the implementation of PeopleSoft Integration Broker should have familiarity, training or experience in the following PeopleSoft areas:

- PeopleTools.
- PeopleCode.
- Application Engine.

In addition, developers should have an understanding and research capabilities in:

- Extensible Markup Language (XML).
- XML schema.
- Simple Object Access Protocol (SOAP).
- Hypertext Transfer Protocol (HTTP).
- Web Services Description Language (WSDL).
- Web Application Description Language (WADL).
- Universal Description, Discovery and Integration (UDDI) standard.
- Java programming language.

Other Sources of Information

In addition to the implementation considerations presented in this topic, take advantage of all PeopleSoft sources of information, including the installation guides, release notes, product documentation, curriculum, and red papers.

The Getting Started with PeopleTools documentation may also provide some useful information.

Understanding PeopleSoft Integration Broker

Introduction to PeopleSoft Integration Broker

PeopleSoft Integration Broker is a middleware technology that:

- Performs asynchronous and synchronous messaging among internal systems and third-party systems.
- Exposes PeopleSoft business logic as web services to PeopleSoft and third-party systems.
- Consumes and invokes web services from third-party and PeopleSoft systems.

PeopleSoft Integration Broker enables you to perform these integrations among internal systems and third-party integration partners, while managing data structure, data format and transport disparities. Because of its modular design, you can reuse many elements that you develop for integrations.

PeopleSoft Integration Broker consists of two subsystems: the integration gateway and the integration engine. The integration gateway resides on a PeopleSoft web server, and the integration engine is installed on an application server as part of the PeopleSoft application.

Important! PeopleSoft Integration Broker interacts with a wide variety of third-party products. This documentation is not an authoritative source of information about any third-party product. Most third-party products are delivered with their own documentation, which you should use as the primary source for information about them. This product documentation provides guidance that enables you to determine the configuration settings that PeopleSoft Integration Broker requires to work with third-party products. It does not address all configuration permutations. Examples of settings and data relative to a third-party product may not be correct for your particular situation. To properly configure PeopleSoft Integration Broker, you must apply your own expertise and obtain the most accurate and current information about third-party products.

Web Services

PeopleSoft Integration Broker enables you to provide web services to other PeopleSoft systems and external integration partners by generating Web Services Description Language (WSDL) documents and Web Application Definition Language (WADL) document from integration metadata. PeopleSoft supports providing WSDL documents and WADL documents to the PeopleSoft WSDL repository. The system also supports providing WSDL documents to Universal Description, Discovery, and Integration (UDDI) repositories.

The system enables you to consume WSDL documents from other PeopleSoft and third-party systems, and automatically creates integration metadata based on the consumed WSDL documents for processing integrations. You can consume WSDL documents from other PeopleSoft systems, UDDI repositories, WSDL URLs, and Web Services Inspection Language (WSIL) URLs.

Integration Gateway

The integration gateway is a platform that manages the receipt and delivery of messages passed among systems through PeopleSoft Integration Broker. It supports the leading TCP/IP application protocols used in the marketplace today and provides extensible interfaces to develop new connectors for communication with legacy, enterprise resource planning, and internet-based systems.

Additional features include:

- Backward compatibility for Extensible Markup Language (XML) links and PeopleSoft Application Messaging.
- Listening connectors and target connectors that transport messages between integration participants and the integration engine.

Note: This feature also enables you to build your own connectors to complement those delivered with PeopleSoft Integration Broker.

- Basic logging information concerning message receipt, delivery, and errors.
- Connection persistence with continuous open feeds to external systems through connectors, with full failover capabilities.
- Transport protocol and message format management so that when messages reach the integration engine, they have a PeopleSoft-compatible message format.

Related Links

[Integration Gateway Architecture](#)

Integration Engine

The integration engine runs on the PeopleSoft application server. Rather than communicating directly with other applications, the integration engine sends and receives messages through one or more separately installed integration gateways.

The integration engine:

- Uses a modular architecture, so it can treat gateways as black boxes and communicate with them using standard connectors.
- Adapts elements of an existing integration to produce a new integration with only minor adjustments.
- Handles messages containing data in a variety of formats. Formats include the PeopleSoft rowset-based message format, and nonrowset-based message structures including , XML document object model messages, Simple Object Access Protocol (SOAP) messages, and non-XML files.
- Sends and receives messages asynchronously (like email) or synchronously (suspending activity to wait for a response).
- Applies message transmission type and routing based on specifications that you define in a PeopleSoft Pure Internet Architecture component.

- By developing and applying application engine transform programs, the application engine can transform message structure and translate data content according to specifications that you define in PeopleSoft Pure Internet Architecture components.

You develop transform application engine programs in PeopleCode or Extensible Stylesheet Language Transformation (XSLT) code.

These specifications can be reused for other integrations.

- Handles security features such as authentication, nonrepudiation, and cookies.

Related Links

[Integration Engine Architecture](#)

Integration Gateway Architecture

This section discusses:


- Architecture components.
- Connectors.
- Gateway manager.
- Gateway services.

Architecture Elements

You use an integration gateway to receive and send messages among integration participant systems.

Listening connectors receive incoming messages and deliver the incoming requests to the gateway manager, which is a dispatcher for messages that flow through an integration gateway. The gateway manager determines which target connector to use to properly deliver the messages to their intended recipients. The target connector then delivers the messages to the intended recipients using the recipients' preferred protocols.

This image illustrates the components that comprise the architecture of the integration gateway.

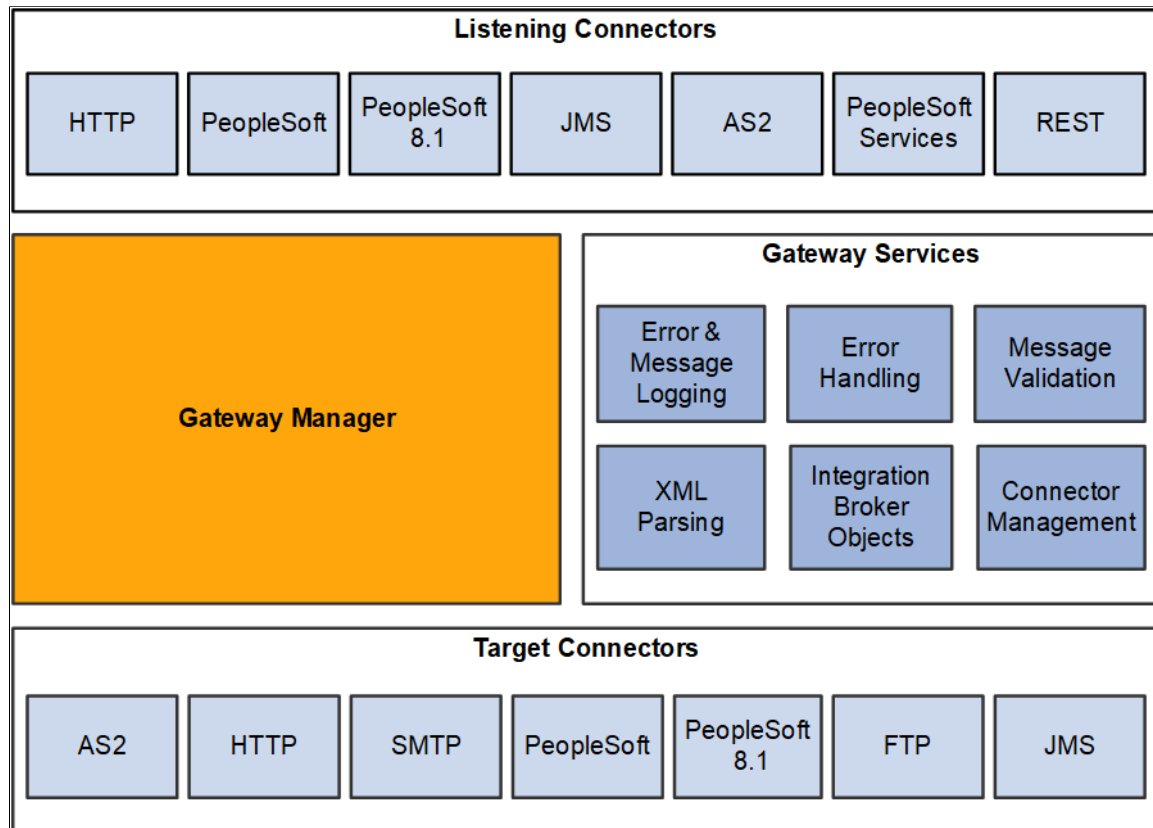

Connectors

Listening connectors and target connectors transport messages between integration participants and the integration gateway. These connectors support asynchronous and synchronous message handling. Many connectors are configurable at the integration gateway and system levels.

Listening Connectors

Listening connectors receive incoming data streams and perform services based on the content of the stream. They are invoked externally by other PeopleSoft systems and third-party systems.

Target Connectors

Target connectors initiate communication with other PeopleSoft systems or third-party systems. A target connector might not receive a response from the target system during each operation, but every transmission requires a low-level acknowledgment.

PeopleSoft Integration Broker Connector SDK

The integration gateway provides a fully extensible model for developing new connectors built to the interface specification of the PeopleSoft Integration Broker software development kit (SDK) by PeopleSoft customers, consultants, and application developers.

Related Links

“Understanding Listening Connectors and Target Connectors” (Integration Broker Administration)

“Understanding the PeopleSoft Integration Broker Connector SDK” (Integration Broker Administration)

Gateway Manager

The gateway manager processes every message that flows through an integration gateway and maintains links to the other major integration gateway components, including target connectors, listening connectors, and each of the gateway services.

Listening connectors invoke the gateway manager when they receive a request. The gateway manager uses the messaging objects `IBRequest` and `IBResponse` to determine how to route each request.

The gateway manager uses a number of the gateway services during this stage to perform operations such as message validation. The gateway manager then invokes the appropriate target connector based on the content of the message object and waits for a reply from the target connector. When the reply is received, the gateway manager forwards the reply to the calling listening connector.

If an error occurs, the gateway manager uses the error handling service and works with the service to prepare an error reply for the listening connector.

Gateway Services

This section describes the gateway services that the gateway manager uses.

XML Parsing

Most `IBRequest` objects and `IBResponse` objects that are processed in the system contain a content section that represents the actual business content sent.

Most of the time, these content sections contain XML data. Consequently, often connectors must parse and traverse XML. The standard Java XML objects are cumbersome for manipulating XML, so the integration gateway includes an XML parsing service consisting of objects that provide an intuitive interface for manipulating XML objects. This service is delivered as a set of three classes: `XmlDocument`, `XmlNode` and `XmlNodeList`.

See the product documentation for [PeopleCode API Reference](#).

Integration Broker Objects

Two objects comprise the messaging objects service in the integration gateway:

- `IBRequest`
- `IBResponse`

These objects represent the request and response that enter and exit PeopleSoft Integration Broker.

See [Supported Message Structures](#).

Connector Management

The connector management service is a composite of several services that manage connectors. The gateway processes each IBRequest to determine the appropriate connector to call in each situation. This is primarily a message routing function that has varying levels of complexity abstracted from the connectors. The connector management service also processes the IBResponse returned by each connector.

WS-Security

WS-Security is an extension to the concept of the SOAP envelope header that enables applications to construct secure SOAP message exchanges. It also provides a means for associating security tokens with messages.

See “Implementing Web Services Security” (Integration Broker Administration).

Error and Service Operation Logging

Most components in the system use a standard error logging interface.

Each PeopleSoft-delivered connector uses the logging API in the same fashion, ensuring that an administrator can quickly drill down on problems or simply review the logs to see the IBRequest object, the IBResponse object, and even the raw data exchanged with integration participants.

See [Understanding Error Handling, Logging, Tracing and Debugging](#).

Error Handling

The integration gateway provides a standard error handling interface that is exposed to each connector. This service provides error handling and error logging for most connectors delivered with PeopleSoft Integration Broker.

Message Validation

Messages that pass into PeopleSoft Integration Broker must contain certain elements to be processed. Because the integration gateway is the first component that processes messages sent to a PeopleSoft application, it performs basic validation—such as making sure that the message identifies its requestor and service operation name—to ensure that the integration engine and the target application can process them.


Integration Engine Architecture

The integration engine uses a variety of PeopleTools elements to create, implement, manage, and enhance integrations. Its modular architecture separates integration development activities from administrative activities.

The integration engine is a combination of PeopleSoft Application Designer definitions, PeopleSoft Pure Internet Architecture definitions, PeopleCode, and XSLT code, along with the underlying mechanisms that tie all these elements together. The underlying mechanisms include the request handlers that process both inbound and outbound messages according to the specifications in the development and administrative elements.

The integration engine resides on the PeopleSoft application server.

This diagram illustrates the integration components that reside on the integration engine and the types of processing it performs.

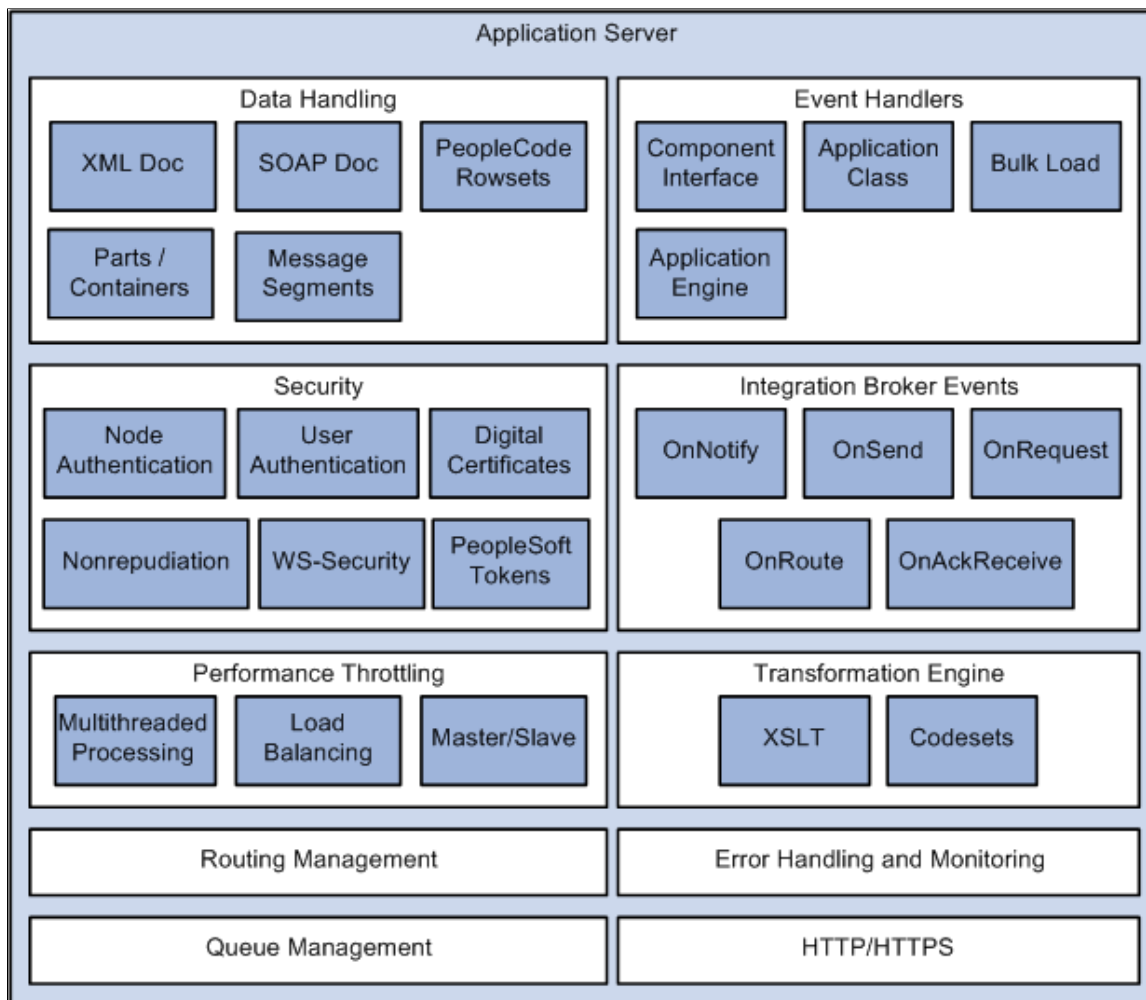

Service Operations

A service operation in the PeopleSoft system contains the processing logic for an integration and determines if the integration is to be processed synchronously or asynchronously. A service operation definition contains the following definitions:

- *Message*. A message contains the payload of the integration.
- *XML message schema*. Message schemas provide the physical description of the data that is being sent, including descriptions of fields, field types, field lengths, and so on.
- *Handler*. A service operation handler contains the processing logic for the service operation.
- *Routing*. A routing definition specifies the direction of the integration (inbound or outbound), routing alias names, transformations, and more.

Service Operation Types

PeopleSoft Integration Broker supports four types of service operations:

- Asynchronous one-way.
- Asynchronous request/response.
- Asynchronous to synchronous.
- Synchronous

Note: In this section the term *transaction* is used to describe the exchange of data between integration partners.

When PeopleSoft Integration Broker sends a service operation, the receiving system returns a response back to the sender. With asynchronous transactions, the response is automatically generated by the integration gateway, and it serves only to notify the sending system of the transmission status of the request. It is processed automatically by the application server, which uses that status information to update the Service Operations Monitor. With synchronous transactions, however, the response includes the content that is requested by the sending system, and it must be generated and returned by the receiving system.

Operation Types

PeopleSoft Integration Broker supports the operation types listed in the table.

For any operation type, the application must invoke PeopleCode, a component interface or data mover script to generate and send a service operation or to receive and process a service operation.

Operation Type	Routing	Actions
Asynchronous — One Way.	Outbound.	1. The application generates and sends a request. 2. One or more target system receives and processes the request.

Operation Type	Routing	Actions
Asynchronous — Request/Response.	Outbound.	1. The application generates and sends a request. 2. The target system receives and processes the request. 3. Sometime later the target system sends a response which contains the transaction ID from the original request. This ID serves as the correlation ID. 4. The application processes the response using the correlation ID to map it back to the original request. The message sent back is a response in the form of a request.
Asynchronous to Synchronous.	Outbound.	1. The application generates and sends a request. 2. A single target system receives and processes the request, then generates and sends a response. 3. The application receives and processes the response.
Synchronous.	Outbound.	1. The application generates and sends a request. 2. The application suspends activity and waits for a response. 3. A single target system receives and processes the request, then generates and sends a response. 4. The application resumes its activity and receives and processes the response.
Asynchronous — One way.	Inbound.	1. A source system generates and sends a request. 2. The application receives and processes the request.

Operation Type	Routing	Actions
Asynchronous — Request/Response.	Inbound.	1. A source system generates and sends a request. 2. The application receives and processes the request. 3. Sometime later the application sends a response back to the source system. The response includes a unique identifier from the original request, which serves as a correlation ID. 4. The source system processes the response using the correlation ID to map it back to the original request.
Asynchronous to Synchronous.	Inbound.	1. A source system generates and sends a request. 2. The application receives and processes the request, then generates and sends a response. 3. The source system receives and processes the response.
Synchronous.	Inbound.	1. A source system generates and sends a request. 2. The source system suspends activity and waits for a response. 3. The application receives and processes the request, then generates and sends a response. 4. The source system resumes its activity and receives and processes the response.

Related Links

[Services Operation Types](#)

Inbound and Outbound Request Flows

This section discusses how inbound and outbound service operation flow through the architecture components of PeopleSoft Integration Broker.

The PeopleSoft messaging architecture is discussed in greater detail in the Understanding Messaging topic in the product documentation.

Related Links

[Messaging Types](#)


[Asynchronous Messaging](#)

[Synchronous Messaging](#)

Inbound Request Flow

This section describes the flow of a typical inbound request from an external system through PeopleSoft Integration Broker.

This example illustrates the flow of an outbound request through PeopleSoft Integration Broker.

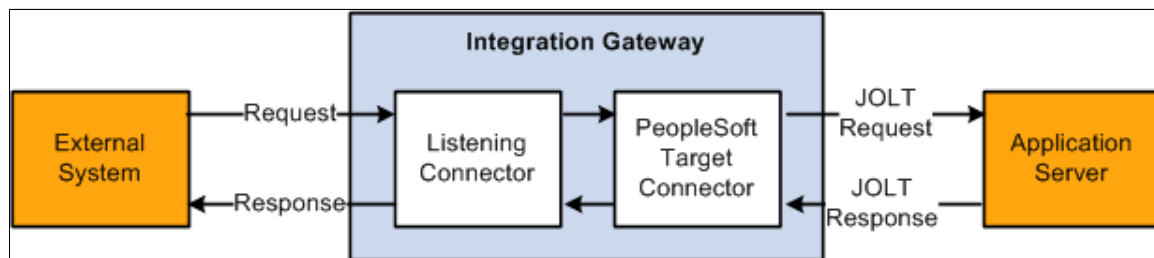

After the incoming request has been received by the integration gateway, the flow through PeopleSoft Integration Broker is the same, regardless of the listening connector used. With this in mind, no specific listening connector will be discussed here. The scenario is simple: a request is sent into the gateway, which then passes it on to the application server. The application server processes the request, and returns a response.

Step 1: External System Sends a Request to PeopleSoft Integration Broker

The first step is that an external system sends a request to PeopleSoft Integration Broker. The external system can be another PeopleSoft system or a third-party system.

Step 2: Request is Received by the Listening Connector

When a request is received by a listening connector, the first thing that the connector does is write the request to the gateway log file. (The gateway's integration properties file is used to set the logging level, which controls what is actually written to the log. If messages are not being seen in the log file, check to ensure that the log level is set correctly.) The request is written exactly as it is received. This is very useful in that it presents exactly what was sent on the wire, before the connector normalizes the service operation for use by the application server.

The connector then attempts to populate an internal request class with the particulars from the received request.

A term often used in conjunction with listening connectors is *credentials*. Incoming requests are thought to have two logical parts: the credentials and the body. The credentials can be thought of as the information required by PeopleSoft Integration Broker to process and deliver the payload of the message. The payload is located in the body. Since the credentials are separate from the body, the integration gateway does not need to parse or otherwise examine the request body for information on how to route it.

A request without credentials cannot be processed. If the integration gateway receives such a request an error will occur and an error message will be returned to the requestor.

Step 3: Request is Processed by the PeopleSoft Target Connector

In order for a request to be sent from the gateway to the application server, it must pass through the PeopleSoft target connector. This connector has two major responsibilities: it serializes the request to a string, and sends that string via a JOLT connection to the application server.

All communication between the gateway and the application server is done via the use of Multipurpose Internet Mail Extensions (MIME) messages. When the request is received by the connector, it builds a MIME message. Typically the MIME message will only have two sections. In the first, the credentials are stored in an XML document in a specific format. The second section stores the body.

At this point the request is in a standard format understood by both the gateway and the application server. All requests must eventually resolve to this format before they can be sent to the application server for processing. This format effectively isolates the application server from the protocols supported by the gateway; for the most part, there is no information present about what listening connector was initially invoked by the external request.

One credential element that may be present is the one for cookies. Obviously if this is set, the application server would be right in assuming that the request came through the HTTP listening connector. However, as a general rule the application server is isolated from the details of the protocol and the general broker code on the server does not care what listening connector was used for a given request.

Once the MIME message has been built, it is written to the gateway log.

Finally, the connector looks up the JOLT connection properties from the integration properties file and attempts to send the MIME to the application server. If these properties are not set up correctly, the gateway will be unable to send requests. This is a common source of error, so care should be taken when configuring this file.

An important point to keep in mind is that even though the MIME request to the application server may appear in the gateway log file, the actual request may not have made it to the application server, since the log entry is written before the service operation is sent. If a communication error occurs, the entry will still be present in the log file. However, if this situation occurs an exception will be thrown and an error log entry will also be created.

Step 4: Request is Received by the Application Server

When the MIME request is received by the application server, the system parses it into a request object. The MIME structure is not propagated into the server.

Assuming the request parses without error, the application server pre-processes it.

Pre-processing involves:

- Authenticating the service operation, depending on the authentication scheme configured. If the request fails authentication, an error is returned.
- Determining the direction of the service operation, by looking at the external alias on the routing definition that is associated with the service operation.
- Determining the runtime handler to invoke. Currently, there are three handler types supported by the integration broker: Ping, Synchronous, and Asynchronous. The service operation type determines the handler code to invoke. Synchronous service operations are passed to sync-specific code, and asynchronous service operations are passed to the publish/subscribe subsystem.

Once a request has been passed to its respective handler, further processing is dictated by the data and PeopleCode specific to a particular system. Or in the case of hub configurations, the request may immediately be routed to another external system.

Step 5: Response is Returned by the Application Server

Regardless of how the request is processed, a response must be returned by the application server to the gateway in the same thread of execution. The connection between the gateway and the application server is essentially synchronous, independent of the type of the service operation type. When the gateway sends a request to the application server, it expects and must get a response.

In the case of synchronous processing, the generation of the response is blocked by the processing of the request. A response cannot be generated until the service operation runs to completion. There may be a noticeable delay in receiving the response, depending on the processing required by the OnRequest method or if the request is being sent out of the broker to an external system for additional processing.

Asynchronous requests behave differently. Unlike synchronous requests, there is no blocking. A response is generated for an asynchronous request as soon as the request is placed on the publication queue. Because of this, a response generated for an asynchronous request is not a response in the strictest sense of the term. Such responses should really be considered acknowledgments that the pub/sub system has received the request. Receipt of such a response is not a guarantee that any applicable notification PeopleCode has been successfully run.

Responses are converted to the MIME standard by the application server, and are returned to the gateway.

Step 6: Response is Received by the PeopleSoft Target Connector

As soon as the MIME response is received by the PeopleSoft target connector, it is written to the gateway log file.

The MIME response is then parsed back into a gateway request object, and is then returned to the listening connector.

Step 7: Response is Received by the Listening Connector


The response object is returned to the listening connector, upon which the response is mapped to a response suitable for the given protocol.

It should be emphasized that, from the viewpoint of the listening connector, the processing of requests is done synchronously. A request is received by a listening connector which then converts it to a suitable format, makes a blocking call to the gateway to handle the message, and ultimately gets a response back all in the same thread of execution.

Outbound Request Flow

The following diagram shows an outgoing request through PeopleSoft Integration Broker.

This example illustrates an outbound request through PeopleSoft Integration Broker to an external system.

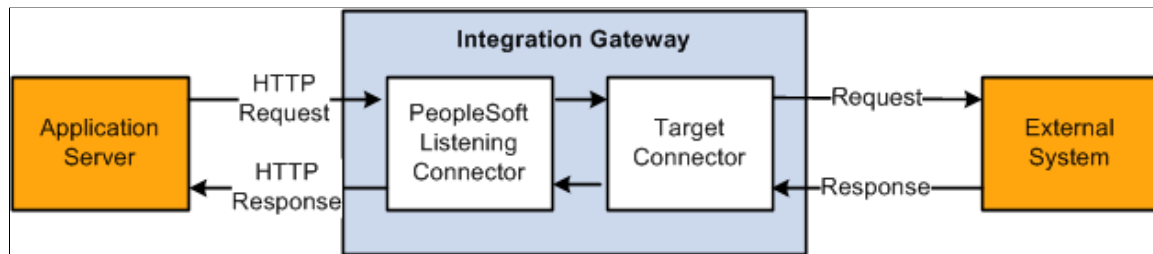

There are several scenarios that might result in a request being sent out of the broker. Requests can be sent in PeopleCode by using the Publish or SyncRequest methods of the Integration Broker class.

Regardless of how the request is created, the mechanism for sending it out of the broker is the same, and the flow is the same regardless of the specific outgoing target connector you invoke.

Step 1: Application Server Generates Request

Once an outgoing request has been generated, the application server must perform some basic processing before it can be sent out.

The application server looks at the request, and extracts the information about the node that it is being sent to.

If target connector information was not supplied via PeopleCode or as part of the routing, then the node name is then used to look up the name of the gateway to use, the target connector to use on that gateway, as well as any specific connector properties that need to be passed to the connector in order to handle the request. If this information is not found, an error will occur.

The application server modifies the outgoing request with the appropriate connector information.

The request is then converted to the MIME standard format, and is sent to the gateway over an HTTP connection.

The request must be sent to the PeopleSoft listening connector on the gateway. The application server uses the value of the Gateway URL defined for the given gateway. If this URL is not valid or does not point to the PeopleSoft listening connector, the application server will be unable to send the request.

Step 2: Request is Received by the PeopleSoft Listening Connector

When the MIME request is received by the PeopleSoft listening connector, it is written to the gateway log file.

The request is converted from MIME format to a gateway request object.

The connector then examines the request to determine what target connector the request is to be sent to; that target connector is then invoked.

Step 3: Request is Received by the Target Connector

The target connector validates the request. Each connector requires certain properties to be set, otherwise the request cannot be sent. For example, the HTTP target connector requires that the Primary URL be set. If any mandatory connector properties are missing or are invalid, an error will be thrown.

The target connector then converts the request into whatever format is required by the protocol.

The modified request is then written to the gateway log, and then sent out.

Step 4: Response is Received by the Target Connector

The response received by the target connector is written to the gateway log, and the response is used to build a gateway response object, which is then returned to the PeopleSoft listening connector.

Step 5: Response is Received by the PeopleSoft Listening Connector

The response object is then converted to the MIME standard format by the connector.

The MIME response is then written to the gateway log file, and is then returned to the application server.

Interactions with the gateway are always synchronous. If a request is sent to the gateway, a response should be expected.

Step 2 is an HTTP POST request made of the gateway, and the response created here in Step 5 is returned in response to that HTTP request. The HTTP connection is open for the duration of the processing for that request.

The response object is returned to the listening connector, upon which the response is mapped to a response suitable for the given protocol.

Understanding Messaging

Messaging Types

PeopleSoft Integration Broker supports asynchronous and synchronous messaging.

<i>Term</i>	<i>Definition</i>
Synchronous messaging	In synchronous messaging, a message is sent to a target system. The sending system must receive a response from the target system before it continues to process additional messages.
Asynchronous messaging	In asynchronous messaging, a message is sent to a target system. However, the sending system does not need to receive a response from the target system before it can continue processing messages. This type of messaging is also referred to as fire-and-forget messaging.

The remainder of this topic discusses the PeopleSoft Integration Broker architecture for these messaging types.

Note: For compatibility with previous PeopleTools releases, the PeopleSoft Integration Broker services-oriented architecture introduced in PeopleTools 8.48 overlays the messaging architecture from earlier PeopleTools 8.4x releases.


Asynchronous Messaging

This section discusses the PeopleSoft Integration Broker asynchronous messaging architecture.

Brokers, Contractors and Queues

The publication broker, publication contractor, and subscription contractor services are the primary application server elements required for asynchronous messaging. The publication broker service routes the workload to both contractor server processes.

This example illustrates the publication broker service routing the workload the contractor server processes.

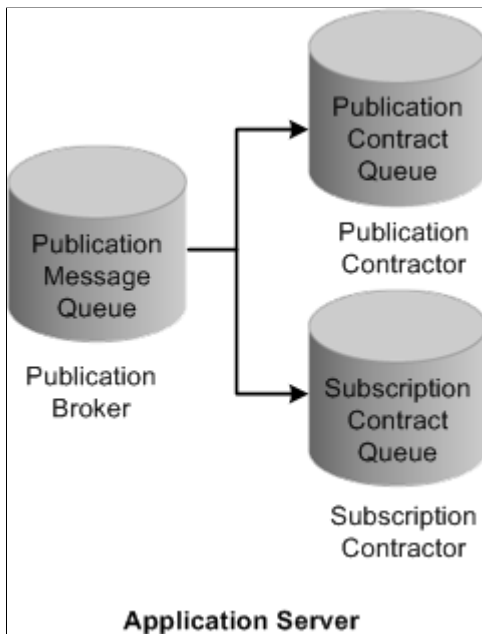

Term	Definition
Publication broker	Acts as the routing mechanism. When an asynchronous service operation arrives in its queue, the publication broker service runs the defined routing rules. If the service operation needs to be published to a remote node, it routes the service operation to the publication contractor service. If the service operation is subscribed to on the local node, then the publication broker routes the service operation to the subscription contractor service. Routing involves submitting either a subscription or publication contract to the appropriate contractor, followed by an asynchronous call to the contractor service notifying it that work is waiting in the queue.
Publication contractor	References the publication contract submitted by the publication broker service and performs an HTTP post of the publication service operation to the integration gateway. When the integration gateway sends a reply indicating that it received the publication service operation, the publication contractor service updates the publication contract with the status of subscription processing (<i>Done</i> or <i>Retry</i>).
Subscription contractor	References the subscription contract submitted by the publication broker service and runs the appropriate notification PeopleCode. Then it updates the subscription contract concerning the status of the subscription processing.

Messaging System Server Processes

The application server offers six server processes to handle asynchronous service operations. They work in pairs to provide three primary services:

Service	Server Processes
Publication broker	• Broker dispatcher (PSBRKDSP) • Broker handler (PSBRKHND)
Publication contractor	• Publication dispatcher (PSPUBDSP) • Publication handler (PSPUBHND)
Subscription contractor	• Subscription dispatcher (PSSUBDSP) • Subscription handler (PSSUBHND)

Dispatchers and Handlers

Each of the publication broker, publication contractor, and subscription contractor is comprised of two individual server processes that work together to handle incoming requests. One server process functions as a dispatcher, while the other functions as a handler.


This relationship is analogous to the way that the application server handles workstation connections and requests. To handle the incoming client requests, the application server has a listener and a handler (or a pool of handlers). The listener receives the incoming requests and then routes them to an available handler.

Typically, one listener serves many handlers. The relationship between the dispatcher and the handlers is analogous to the relationship between the Jolt Server Listener (JSL) and the Jolt Server handler (JSH). In the case of the application messaging server processes, the dispatcher functions as the listener, and the handler as similar to the JSH.

For the services discussed in this section (publication contractor, subscription contractor, and publication broker) there are *at least* two server processes: a single dispatcher and one or more handlers. The PSxxxDSP server process is the dispatcher, and the PSxxxHND server process is the handler.

Note: The xxx represents BRK, PUB, or SUB. For example, in the case of the publication broker, PSBRKDSP is the dispatcher and PSBRKHND is the handler.

This example illustrates the messaging server processes grouped by their functions in the messaging architecture:

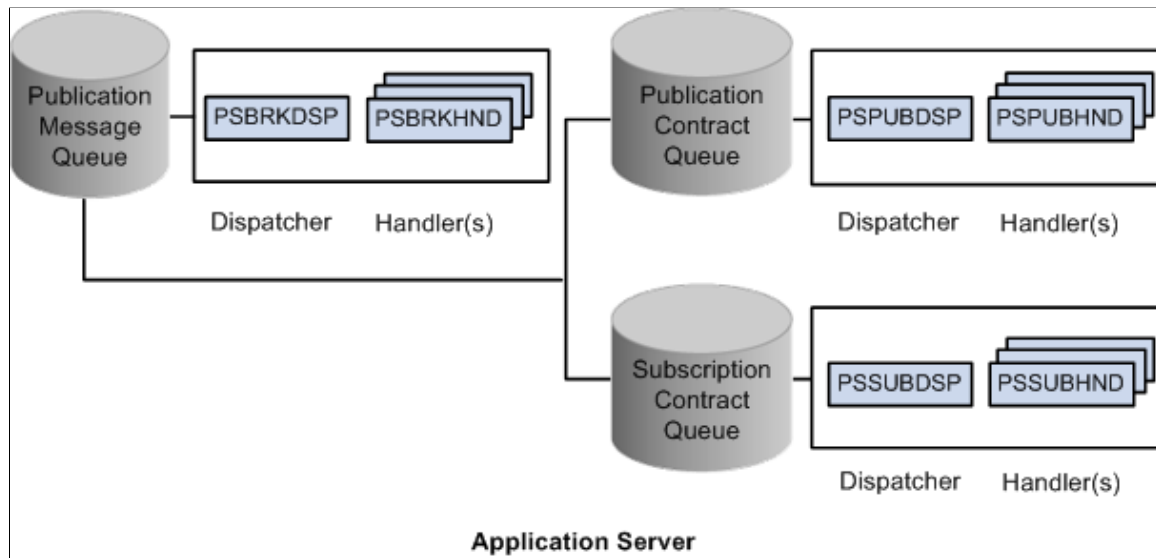

Asynchronous Service Operation Publication

This section discusses:

- Asynchronous publish of a service operation instance.
- Asynchronous publish of a publication contract.


Understanding Asynchronous Service Operation Publication

This section describes the flow of an asynchronous service operation publication through PeopleSoft Integration Broker, as well as the status of the service operations as they appear in Service Operations Monitor.

Asynchronous Publish of Service Operation Instances

This topic describes asynchronous publishing of service operation instances in PeopleSoft Integration Broker.

This example illustrates asynchronous publish of a service operation instance in the messaging system:

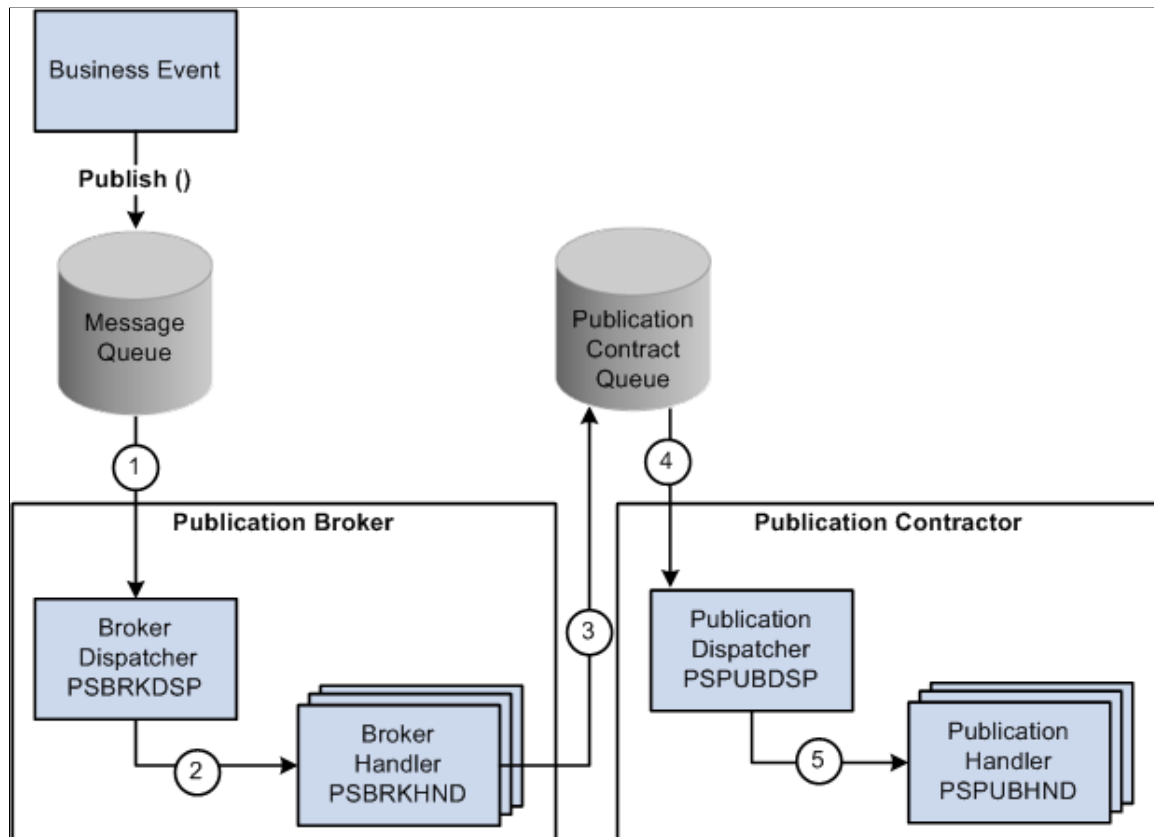

The following table describes the processing steps of an asynchronous publication of a service operation instance in PeopleSoft Integration Broker:

Step	Process
1	The service operation is published and enters the message queue. The instance is written to the PSAPMSGPUBHDR table in the database, but is not yet dispatched. The broker dispatcher process picks up the service operation instance from its queue. During this stage, the service operation instance status in the Service Operations Monitor is <i>New</i>.
2	The broker dispatcher process passes the service operation instance to the broker handler process. During this stage, the service operation instance status in the Service Operations Monitor is <i>Started</i>.

Step	Process
3	The broker handler process accepts the service operation instance, reads the data, and runs the routing rules to determine where the publication needs to be delivered. The broker handler process then writes a publication contract in the PSAPMSGPUBCON table and notifies the publication contractor service that it has an item to process. During this stage, the service operation instance status in the Service Operation Monitor is <i>Working</i>.
4	After the service operation is stored in the publication contract queue, the status of the publication contract in the Service Operations Monitor is <i>New</i>, the service operation instance status is <i>Done</i>, and the publication dispatcher process picks up the publication contract from its queue.
5	The publication dispatcher process passes the service operation instance to the publication handler process. During this stage, the publication contract status in the Service Operations Monitor is <i>Started</i>.


You view service operation instance status information on the Operation Instances page of the Service Operations Monitor. To access the page select **PeopleTools > Integration Broker > Service Operations Monitor > Monitor > Monitor Asynchronous Services > Operation Instances**.

See “Monitoring Asynchronous Service Operation Instances” (Integration Broker Service Operations Monitor).

Asynchronous Publish of Publication Contracts

This topic discusses asynchronous publishing of publication contracts in PeopleSoft Integration Broker.

This example illustrates the flow of an asynchronous publication contract through the messaging system.

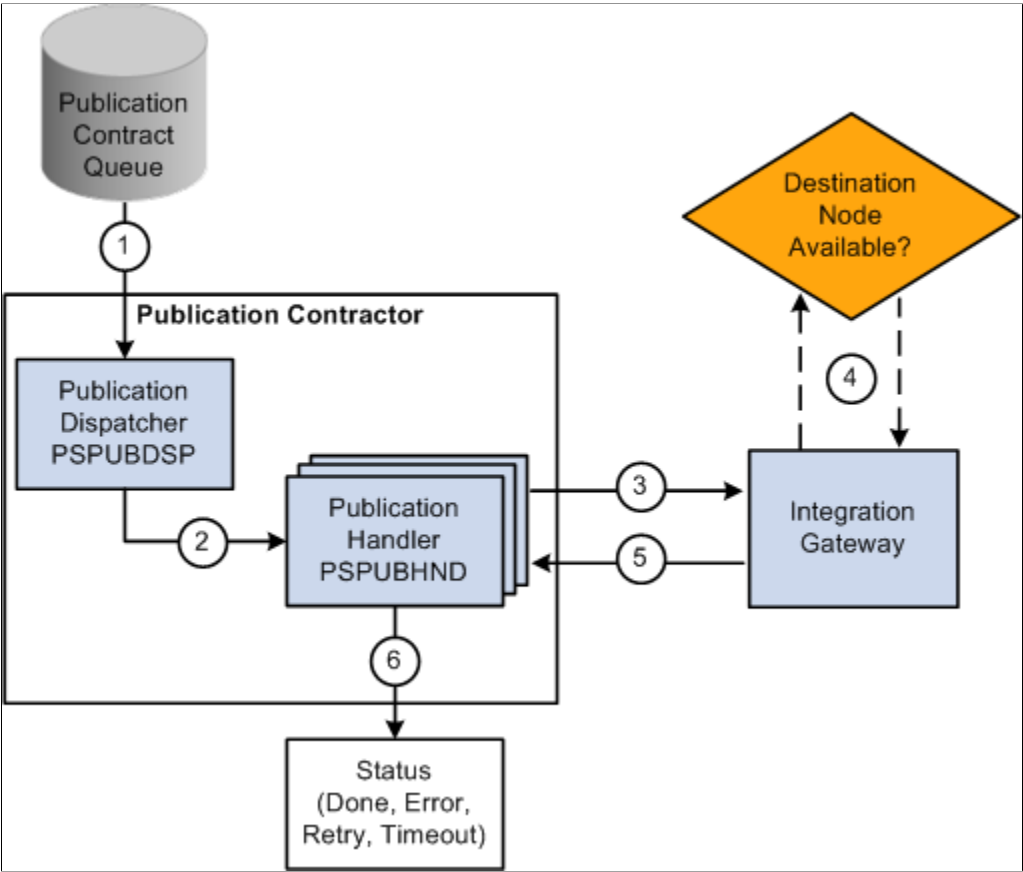

The following table describes the processing steps of an asynchronous publish of a publication contract in PeopleSoft Integration Broker:

Step	Process
1	The publication dispatcher picks up the publication contract from the publication contract queue.
2	The publication contract is written to the PSAPMSGPUBCON table in the database, but is not yet dispatched. The publication dispatcher process passes the publication contract to the publication handler process. At this stage the status of the publication contract in the Service Operation Monitor is <i>Started</i>.
3	The publication handler process accepts the publication contract and attempts to deliver the service operation to the integration gateway. At this stage, the status of the publication contract in the Service Operations Monitor is <i>Working</i>.

Step	Process
4	The integration gateway attempts to pass the publication contract to the destination node.
5	The integration gateway passes the status of the publication contract back to the publication handler.
6	The publication handler updates the Service Operations Monitor with the status of the publication contract. The typical statuses that displays in the Service Operations Monitor are: • <i>Done</i>. The subscribing node successfully received the contract. • <i>Timeout</i>. The system timed out before the transaction processing was completed. • <i>Retry</i>. The system encountered an error. The retry is automatic. When service operations have <i>Retry</i> status, the service operations are not resent until an internal ping is successful. This ping is similar to a node ping. The publication Contract dispatcher, as part of its on idle processing, pings a node that is in <i>Retry</i> status and verifies if the connection is reestablished. When the ping is successful the publication Contract dispatcher resends the service operation. The service operation goes back to the publication handler process and returns to <i>Working</i> status.

You can view the status information for the publication contract using the publication Contracts page in the Service Operations Monitor. To access the page, select **PeopleTools > Integration Broker > Service Operations Monitor > Monitor > Monitor Asynchronous Services > Publication Contracts**.

See “Monitoring Publication Contracts” (Integration Broker Service Operations Monitor).

The Service Operations Monitor may display statuses for publication contracts other than those discussed in this section.

See “Understanding Asynchronous Service Operations Statuses” (Integration Broker Service Operations Monitor)

Asynchronous Service Operation Subscription

This section discusses:

- Asynchronous subscription of a service operation instance.
- Asynchronous subscription contracts.


Understanding Asynchronous Service Operation Subscription

This section describes the flow of an asynchronous service operation subscription through PeopleSoft Integration Broker, as well as the service operation status at each stage of the process.

Asynchronous Subscription of Service Operation Instances

This topic describes asynchronous subscription process of service operation instances in PeopleSoft Integration Broker.

This example illustrates the flow of an asynchronous service operation subscription through PeopleSoft Integration Broker.

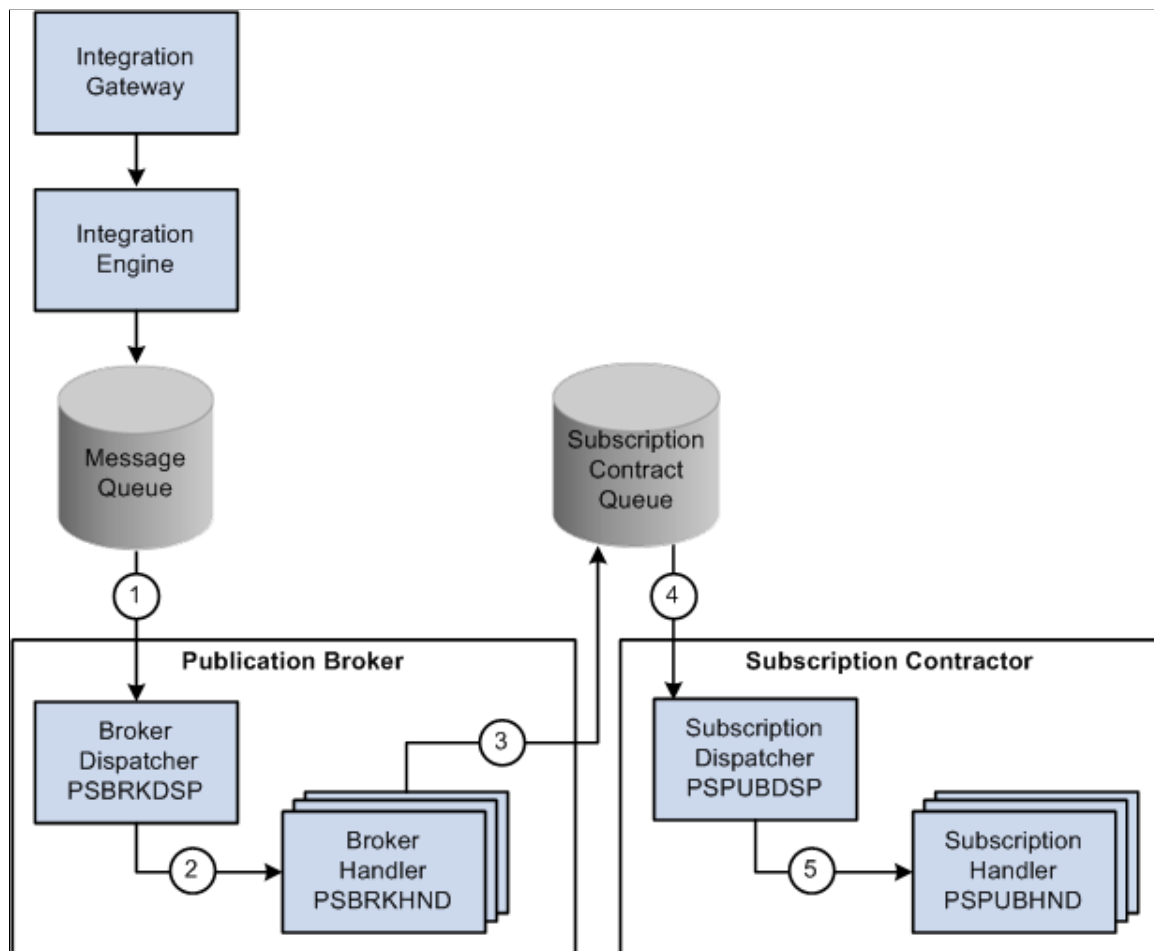

The following table describes the processing steps of an asynchronous subscription of a service operation instance in PeopleSoft Integration Broker:

Step	Process
1	The service operation enters the message queue. The instance is written to the database, but not yet dispatched The broker dispatcher process picks up the service operation instance from its queue. During this stage, the status of the service operation instance in the Service Operations Monitor is <i>New</i>.
2	The broker dispatcher process passes the service operation instance to the broker handler process. During this stage, the status of the service operation instance in the Service Operations Monitor is <i>Started</i>.
3	The broker handler process accepts the service operation instance, reads the data, and runs the subscription routing rules to determine if the service operation needs to be processed locally. During this stage, the status of the service operation instance in the Service Operations Monitor is <i>Working</i>.
4	The broker handler process then writes a subscription contract in the PSAPMSGPUBCON table (the subscription contract queue) and notifies the subscription contractor service that it has an item to process. During this stage, the status of the service operation instance in the Service Operations Monitor is <i>Working</i>.
5	Once the service operation is stored in the subscription contract queue, the status of the service operation instance in the Service Operations Monitor is <i>Done</i>. Processing of the subscription contract begins as the subscription dispatcher process picks up the subscription contract from its queue, and the status of the subscription contract in the Service Operations Monitor is <i>New</i>. In this example, at the point when the status of the asynchronous service operation instance is <i>Done</i>, the subscription contract status is <i>New</i>. Asynchronous subscription contract processing is described in the next section.

You can view service operation instance status on the Operation Instances page of the Service Operations Monitor. To access this page, select **PeopleTools > Integration Broker > Service Operations Monitor > Monitor > Monitor Asynchronous Services > Operation Instances**.

See “Monitoring Asynchronous Service Operation Instances” (Integration Broker Service Operations Monitor).


The Service Operations Monitor may display statuses for subscription instances other than those discussed in this section.

See “Understanding Asynchronous Service Operations Statuses” (Integration Broker Service Operations Monitor).

Asynchronous Subscription Contract

This topic discusses asynchronous subscription contract processing in PeopleSoft Integration Broker.

This example illustrates the flow of an asynchronous subscription contract.

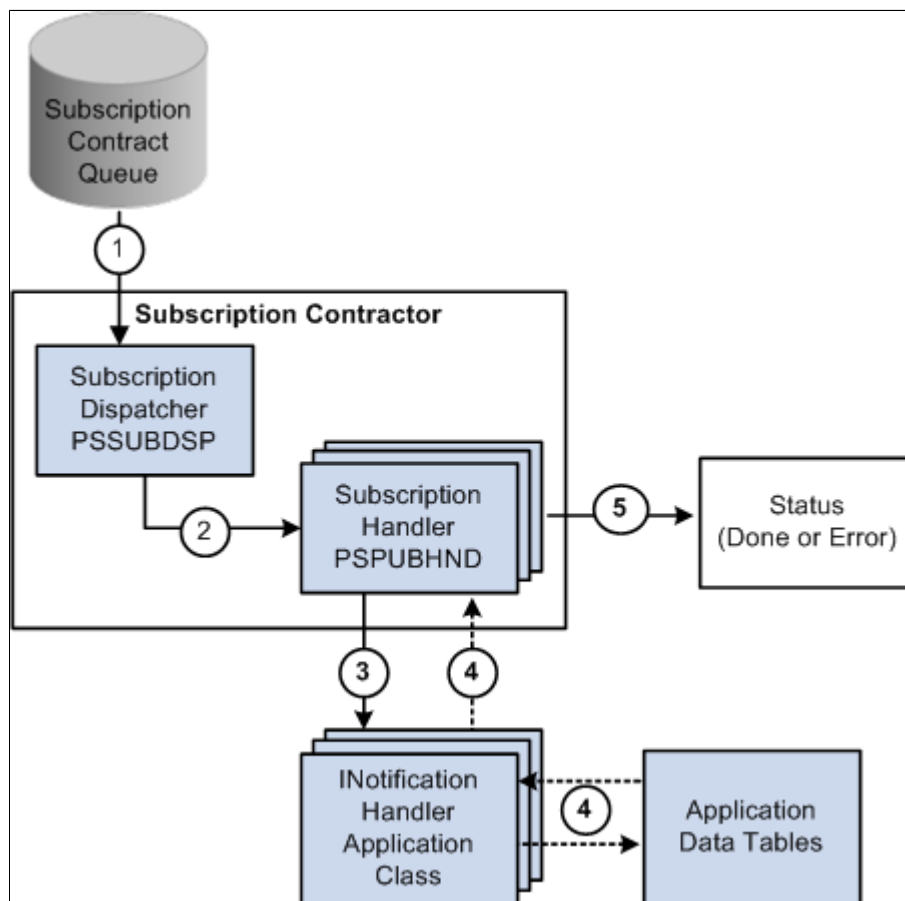

The following table describes the processing steps of an asynchronous subscription contract in PeopleSoft Integration Broker:

Step	Process
1	The subscription dispatcher picks up the contract from the subscription contract queue.
2	The subscription dispatcher process passes the subscription contract to the subscription handler process. At this stage the status of the subscription contract in the Service Operations Monitor is <i>Started</i>.
3	The subscription handler process accepts the subscription contract and runs the notification PeopleCode.
4	In the example shown in the diagram, the notification PeopleCode then uses the service operation data to update application data tables. However, the notification PeopleCode can use the service operation data as input to look up information, create and publish another service operation, and so forth. At this stage, the status of the publication contract in the Service Operations Monitor is <i>Working</i>.
5	The subscription handler passes the status of the subscription contract to the Service Operations Monitor. The typical statuses that display in the Service Operations Monitor for an asynchronous subscription contract are: • <i>Done</i>. The notification PeopleCode ran successfully. • <i>Error</i>. An error occurred.

To view status information for subscription contracts, use the Subscription Contracts page in the Services Operation Monitor. To access the page select **PeopleTools > Integration Broker > Service Operations Monitor > Monitor > Monitor Asynchronous Services > Subscription Contracts**.

See “Monitoring Subscription Contracts” (Integration Broker Service Operations Monitor).

The Service Operations Monitor may display statuses for subscription contracts other than those discussed in this section.

See “Understanding Asynchronous Service Operations Statuses” (Integration Broker Service Operations Monitor).


Synchronous Messaging

This section discusses synchronous messaging in PeopleSoft Integration Broker.

Synchronous Service Operation Publication

This topic discusses synchronous service operation publication in PeopleSoft Integration Broker.

This example illustrates using PeopleSoft Integration Broker to consume a synchronous service operation.

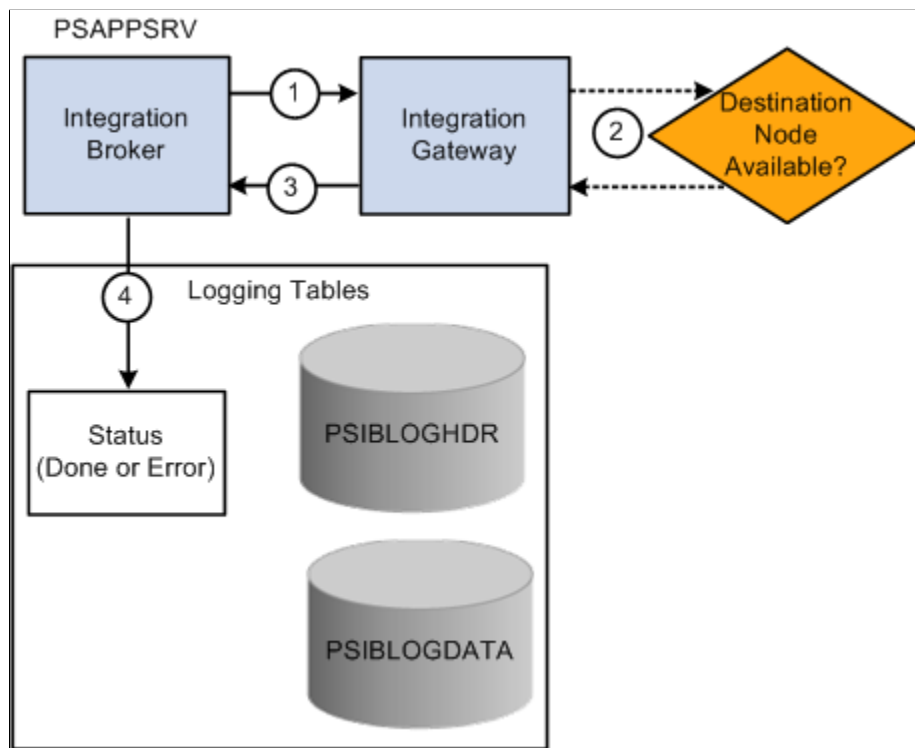

The following table describes the processing steps for a synchronous publication of a service operation in PeopleSoft Integration Broker:

Step	Process
1	The integration engine sends the service operation to the integration gateway.
2	The integration gateway attempts to deliver the service operation to the destination node.
3	The integration gateway sends back the status information to the integration engine

Step	Process
4	The integration engine updates the database tables as well as sends the status information to the Service Operations Monitor. The possible statuses in the Service Operations Monitor for a synchronous publication are: • <i>Done</i>. The integration gateway was able to deliver the service operation to the destination node. • <i>Error</i>. The integration gateway was not able to deliver the service operation to the destination node.

You can view the status information for the invocation in the Service Operations Monitor using the Synchronous Services page. To access the page select **PeopleTools > Integration Broker > Service Operations Monitor > Monitor > Monitor Synchronous Services**.

For status information for synchronous integrations to be available in the Service Operations Monitor, you must set the Log Detail parameter in the routing definition for the service operation.

Related Links

[Defining General Routing Information](#)

“Understanding Synchronous Service Operation Statuses” (Integration Broker Service Operations Monitor)


“Filtering Synchronous Service Operations Data” (Integration Broker Service Operations Monitor)

“Viewing Monitor Output for Synchronous Service Operations Data” (Integration Broker Service Operations Monitor)

Synchronous Service Operation Subscription

This topic discusses synchronous service operation subscription in PeopleSoft Integration Broker.

This example illustrates providing a synchronous service operation through PeopleSoft Integration Broker.

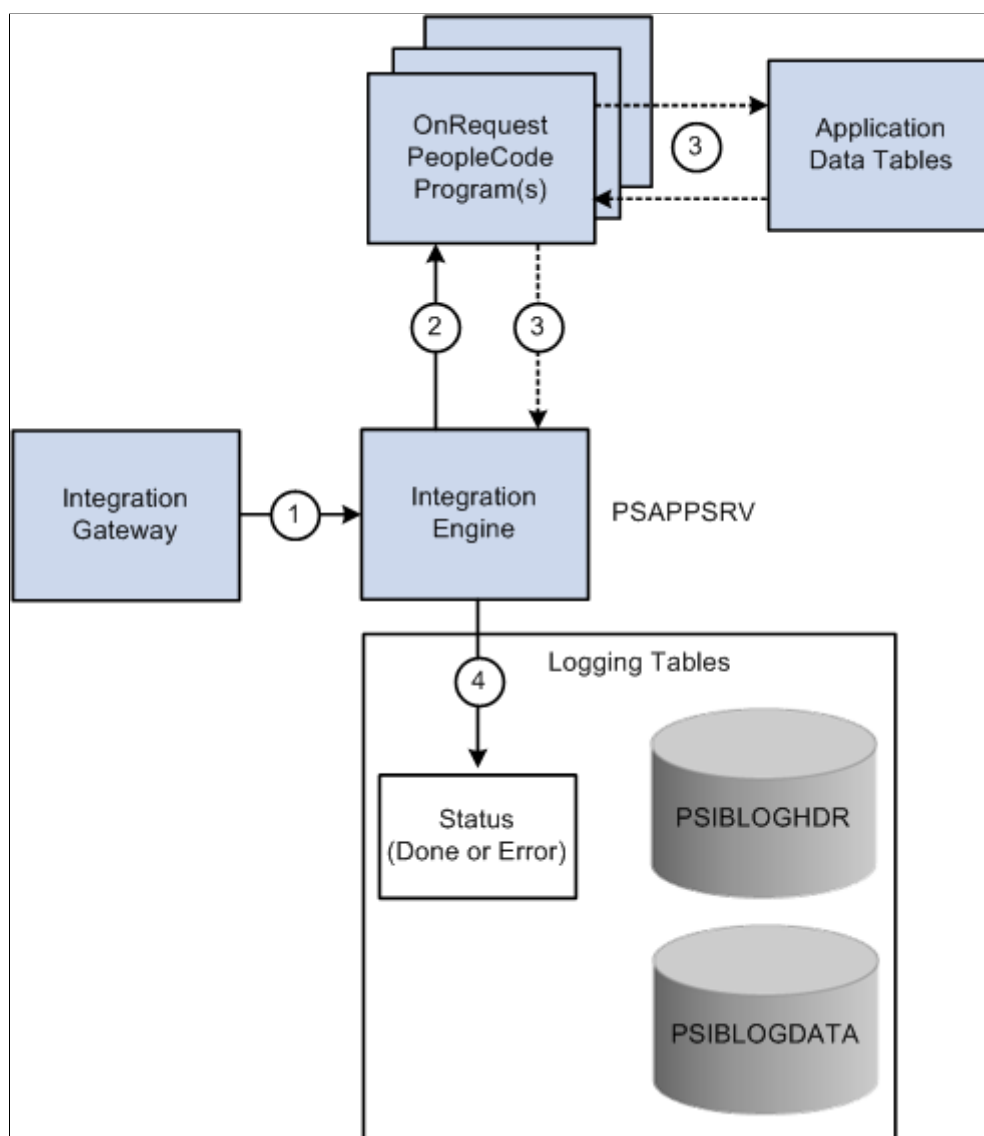

The following table describes the processing steps of a synchronous service operation subscription in PeopleSoft Integration Broker:

Step	Process
1	The integration gateway passes an inbound synchronous service operation to the integration engine.
2	The integration engine runs an OnRequest PeopleCode event program.
3	The OnRequest PeopleCode program attempts to update the application data tables.

Step	Process
4	The integration engine updates the database tables as well as sends the status information to the Service Operations Monitor. The possible statuses in the Service Operations Monitor for a synchronous publication are: • <i>Done</i>. The integration gateway was able to deliver the service operation to the destination node. • <i>Error</i>. The integration gateway was not able to deliver the service operation to the destination node.

For status information for synchronous integrations to be available in the Service Operations Monitor, you must set the Log Detail parameter in the routing definition for the service operation.

You can view the status information for the publication in the Service Operations Monitor by using the Synchronous Services page. Access this page by selecting **PeopleTools** > **Integration Broker** > **Service Operations Monitor** > **Monitor** > **Monitor Synchronous Services**.

Related Links

[Defining General Routing Information](#)

“Understanding Synchronous Service Operation Statuses” (Integration Broker Service Operations Monitor)

“Filtering Synchronous Service Operations Data” (Integration Broker Service Operations Monitor)

“Viewing Monitor Output for Synchronous Service Operations Data” (Integration Broker Service Operations Monitor)

Understanding PeopleSoft Integration Broker Metadata

PeopleSoft Integration Broker Metadata

You use the following integration metadata to create and implement integrations using PeopleSoft Integration Broker

<i>Term</i>	<i>Definition</i>
Integration PeopleCode	You use integration PeopleCode to send and receive messages, route messages and manipulate message content.
Integration gateway definitions	This definition is an application's internal representation of an installed integration gateway. An application requires at least the local gateway, through which it can send and receive messages. Multiple nodes can share the same local gateway, which might be the only gateway that you need for all of the integrations.
Message definitions	Message definitions provide the physical description of the data that is being sent, including fields, field types, and field lengths.
Node definitions	Nodes represent any organization, application or system that will play a part in integrations. For example, nodes can represent customers, business units, suppliers, other trading partners, external or third-party software systems, and so on. Node definitions define the locations to or from which messages can be routed. Because an application can send messages to itself, a <i>default local node</i> definition that represents the application is delivered as part of the integration engine. Each PeopleSoft installation must have one, and only one, default local node
Queue definitions	Queues group asynchronous services for processing. In addition, they can dictate the order of processing of the asynchronous service operations .

Term	Definition
Routing definitions	Routing definitions determine the sender and receiver of an integration. Routing definitions allow you to specify inbound and outbound transformations that enable you to transform data structures into those that the sending or receiving systems can understand.
Service definitions	Service definitions group service operations into logical groups or categories.
Service operation definitions	Service operations define the processing logic of an integration. They specify the inbound, outbound and fault messages associated with an integration, the integration PeopleCode to invoke, and the routing to use.
Transformation programs	A transformation or transform program is a type of Application Engine program that you develop and specify as part of a routing definition. PeopleSoft Integration Broker supports the use of Extensible Stylesheet Language Transformation (XSLT) code and PeopleCode for developing transform programs. Transform programs can transform, filter and translate data.

Order of Precedence for Creating Integration Metadata

Create integration metadata in the following order:

1. Integration gateway definition.
2. Node definition.
3. Message definition.
4. Integration PeopleCode.
5. Transformation programs.
6. Queue definition.
7. Service definition.
8. Service operation definition.
9. Handler definition.
10. Routing definition.

Related Links

“Defining Integration Gateways” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Understanding Managing Messages

Understanding Filtering, Transformation, and Translation

Understanding Service Operation Queues

Understanding Sending and Receiving Messages

Understanding Managing Services

Understanding Managing REST Services

Understanding Managing Service Operations

Understanding REST Service Operations

Understanding Routing Definitions

Understanding Supported Message Structures

Supported Message Structures

This topic discusses the message structures used by PeopleSoft Integration Broker to exchange request and response messages between the integration gateway and the application server, between other PeopleSoft systems, and between third-party integration partners.

Note: The code examples in this topic are for illustrative purposes only and are not intended to be used in a production environment.

Integration Broker Message Structures

This section discusses the internal message formats for request messages and response messages, local compression, and how to access IBInfo elements.

Internal Message Format for Request Messages

This section discusses the format used to exchange request messages between the integration gateway and the application server. These messages are frequently referred to as IBRequest messages.

The Multipurpose Internet Mail Extension standard (MIME) is used as the basic structure for internal messaging. MIME has several advantages in that the standard is well-known and supported, and because it is text-based, it is human readable and can be easily serialized.

Messages using the internal format display in the integration gateway log file. Since the log file is a valuable tool for debugging, anyone reading the file will need to understand how the messages are structured.

Every request message contains three parts:

<i>Term</i>	<i>Definition</i>
Headers	The first part of a request message contains headers which describe the attributes of the whole message.

Term	Definition
IBInfo (Integration Broker Information)	The IBInfo (Integration Broker Information) section contains the credentials of the request as well as all other information required by the PeopleSoft Integration Broker to process the message. The IBInfo for a request has a specific XML structure which is used for all request messages in the system, regardless if the message is being sent to the application server, or to the integration gateway.
Content section	The final section contains the message body of the original request. This is the payload and is what is ultimately delivered to the final destination.

The following is an example of a request message in the PeopleSoft internal MIME format:

```

Message-ID: <-192.0.2.10@nowhere >
Mime-Version: 1.0
Content-Type: multipart/related; boundary="Integration_Server_MIME_Boundary"
Content-ID: PeopleSoft-Internal-Mime-Message
PeopleSoft-ToolsRelease: 8.55

--Integration_Server_MIME_Boundary
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-ID: IBInfo
Content-Disposition: inline

<?xml version="1.0" ?>
  <IBInfo>
    <TransactionID>
      <![CDATA[ caa3a040-bde5-11da-914c-ecaede80d83b]]>
    </TransactionID>
    <ExternalOperationName>
      <![CDATA[ QE_FLIGHTPLAN_TRANSFORM.VERSION_1]]>
    </ExternalOperationName>
    <OperationType>async</OperationType>
    <From>
      <RequestingNode>
        <![CDATA[ QE_LOCAL]]>
      </RequestingNode>
      <RequestingNodeDescription>
        <![CDATA[ ]]>
      </RequestingNodeDescription>
      <NodePassword>
        <![CDATA[ password]]>
      </NodePassword>
      <ExternalUserName>
        <![CDATA[ ]]>
      </ExternalUserName>
      <ExternalUserPassword>
        <![CDATA[ ]]>
      </ExternalUserPassword>
      <AuthToken>
        <![CDATA[ owAAAAQDAgEBAAAAvAIAAAAAAAsAAAAABABTaGRyAk4AbQg4AC4AMQ
AwABTFZoonLEjJaPtR6v02oadvRUoSq2MAAAAFaFNkYXRhV3icHYhNDkAwGERfEQ
srFyFN0cZSaGz8xAmcwA0dzug3yZv53gMUeWaM+s1IV11EFnZOysjBSv2bm01mZ1
L3Dqt4GrETHShtQCs6cWBM2ybr9fMBbP0LSQ==]]>
      </AuthToken>
      <WSA-ReplyTo>
        <![CDATA[ ]]>
      </WSA-ReplyTo>
      <NodeDN>
        <![CDATA[ ]]>
      </NodeDN>

```

```

<OrigUser>
  <![CDATA[ QEDMO]]>
</OrigUser>
<OrigNode>
  <![CDATA[ QE_LOCAL]]>
</OrigNode>
<OrigProcess>
  <![CDATA[ QE_FLIGHTDATA]]>
</OrigProcess>
<OrigTimeStamp>2006-03-27T15:02:39.280000-0800</OrigTimeStamp>
<DirectGatewayRequest />
<SyncServiceTimeout />
<ExternalMessageID>
  <![CDATA[ ]]>
</ExternalMessageID>
<SegmentsUnOrder>N</SegmentsUnOrder>
<ConversationID>
  <![CDATA[ ]]>
</ConversationID>
<WSA-MessageID>
  <![CDATA[ ]]>
</WSA-MessageID>
<InReplyToID>
  <![CDATA[ ]]>
</InReplyToID>
<DataChunk>
  <![CDATA[ ]]>
</DataChunk>
<DataChunkCount>
  <![CDATA[ ]]>
</DataChunkCount>
</From>
<WS-Security>
  <WSTokenType>
    <![CDATA[ ]]>
  </WSTokenType>
</WS-Security>
<To>
  <DestinationNode>
    <![CDATA[ QE_IBTGT]]>
  </DestinationNode>
  <FinalDestinationNode>
    <![CDATA[ ]]>
  </FinalDestinationNode>
  <AppServerDomain>
    <![CDATA[ ]]>
  </AppServerDomain>
</To>
<Cookies>
  <![CDATA[ ]]>
</Cookies>
<PathInfo>
  <![CDATA[ ]]>
</PathInfo>
<HttpSession>
  <SessionID>
    <![CDATA[ ]]>
  </SessionID>
</HttpSession>
<QStrArgs />
<ContentSections>
  <ContentSection>
    <ID>ContentSection0</ID>
    <NonRepudiation>N</NonRepudiation>
    <Headers>
      <version>
        <![CDATA[ VERSION_1]]>
      </version>
      <encoding>
        <![CDATA[ base64 (deflate)]]>
      </encoding>
    </Headers>
  </ContentSection>
</ContentSections>

```

```

        <encodedlength>
          <![CDATA[ 948(709)]]>
        </encodedlength>
        <length>
          <![CDATA[ 2840]]>
        </length>
      </Headers>
    </ContentSection>
  </ContentSections>
  <PublishNode>
    <![CDATA[ QE_LOCAL]]>
  </PublishNode>
  <Queue>
    <![CDATA[ QE_FLIGHTPLAN_CHNL]]>
  </Queue>
  <SubQueue>
    <![CDATA[ c9de8110-bde5-11da-be79-846b4e717ebf]]>
  </SubQueue>
  <VisitedNodes>
    <![CDATA[ QE_LOCAL]]>
  </VisitedNodes>
  <Connector>
    <ConnectorName>
      <![CDATA[ PSFTTARGET]]>
    </ConnectorName>
    <ConnectorClassName>
      <![CDATA[ PeopleSoftTargetConnector]]>
    </ConnectorClassName>
    <RemoteFrameworkURL>
      <![CDATA[ ]]>
    </RemoteFrameworkURL>
    <ConnectorParameters>
      <ConnectorParam>
        <Name>
          <![CDATA[ URL]]>
        </Name>
        <Value>
          <![CDATA[ ]]>
        </Value>
      </ConnectorParam>
    </ConnectorParameters>
    <ConnectorHeaders />
  </Connector>
  <AttachmentSection ResponseAsAttachment="N" />
</IBInfo>

```

```

--Integration_Server_MIME_Boundary
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-ID: ContentSection0
Content-Disposition: inline

```

```

eJydl1lP2zAUhu8n7T+g/gAKFdt6UYxOHCe1FH9gO1RwE1UMTUimTRRN27+fk7SpwItD/F57c
TvG+c5WVz9/fl08ufhZfP46/lycn56NrlCnz8trklTVLRcGlkBB4wCrguhGFoUjw9P382/3w8b
tJ+Ug4GT+6f1ZnM5UZN0AMxrlhF18mrnXk76wWTaaUzTRhOuxU7FS9hpopBxEbC5lSSuY6gqTU
seK/q6hlyJhIIFY+fp8iwuE8yCYk40VpXgZVCfeml0ileSN1IRTYw+Ih1twFDBG569KUuhU/KK
gBQ8HVdR37VGeUHDzW9FIIdtbx9oK1JJAnnDsWOxmcrihZbfBIxyv4FYKys2Y5YyAolHgVrDHsk
z4hMpQU+cJpYJRxb7REamlnnz8DakEpoYSHWs2iPakJCLbR7T1kIPaZnhEZv0yTSqCnXcWT2EiZ
alfLSQZ0TNQGkPiJHQLR2I3pYFU3V5yTqrWX/yq7iirzTIWpCos2blh9esVA0b4Mcm9831BORIJ
TWy//9q0JDg8AlNnc2ghbZrMQ6TFalnbuBocflZQ59S0yAvjz0C3J3hsHd01PQ/XFkLhUZVKYKJ
1Q7nlzjGJbMs6q6heNqquSEMTN+Y2Em69hCZ7X/bCbQts8yNfv67Rwrysnzfr+1fbWg5rFmj+bT
7ro9tV/H6B7C1UN8GpbdsGmp9eXHRaO9i3DVScz7f37IZue0Bfv1z0DxwqQ49AGXRKPxh6BMrwU
J7tegSyiRRduR3se8TAgrehIBKmXSh6GHTQ5+POR1yANQ91Ib48ZH0YUykXAaYCMKVg5AEohI4L
mhAuHlAGiHwQHCKvDjhcVax4iJAwPfAv4KCHOX0/7PRRdw87utffU53bp1X4K/MmvRDh5WLqFhy
CJajVz4+qLr4SyEJnFjZhLeSWzyqPTx6KpgOh9k6D/9z/1gQ1Ww==
--Integration_Server_MIME_Boundary--

```


IBRequest Header Section

The first part of a request message contains headers which describe the attributes of the whole message.

```

Message-ID: <-192.0.2.10@nowhere >
Mime-Version: 1.0
Content-Type: multipart/related; boundary="Integration_Server_MIME_Boundary"
Content-ID: PeopleSoft-Internal-Mime-Message
PeopleSoft-ToolsRelease: 8.55

--Integration_Server_MIME_Boundary
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-ID: IBInfo
Content-Disposition: inline

```

IBRequest IBInfo Section

The following example shows an IBInfo section for a request message that was sent from the application server to the integration gateway (formatted for easier reading):

```

<?xml version="1.0" ?>
  <IBInfo>
    <TransactionID>
      <![CDATA[ caa3a040-bde5-11da-914c-ecaede80d83b]]>
    </TransactionID>
    <ExternalOperationName>
      <![CDATA[ QE_FLIGHTPLAN_TRANSFORM.VERSION_1]]>
    </ExternalOperationName>
    <OperationType>async</OperationType>
    <From>
      <RequestingNode>
        <![CDATA[ QE_LOCAL]]>
      </RequestingNode>
      <RequestingNodeDescription>
        <![CDATA[ ]]>
      </RequestingNodeDescription>
      <NodePassword>
        <![CDATA[ password]]>
      </NodePassword>
      <ExternalUserName>
        <![CDATA[ ]]>
      </ExternalUserName>
      <ExternalUserPassword>
        <![CDATA[ ]]>
      </ExternalUserPassword>
      <AuthToken>
        <![CDATA[ owAAAAQDAgEBAAAAvAIAAAAAAAsAAAABABTaGRyAk4AbQg4AC4AMQ
AwABTFZ0onLEjJaPtR6v02oadvRUoSq2MAAAAFaFNkYXRhV3icHYhNDkAwGERfEQ
srFyFN0cZSaGz8xAmcwA0dzug3yZv53gMUeWam+s1IV11EFnZOysjBSv2bm01mZl
L3Dqt4GrETHShtQCs6cWBM2ybr9fMBbP0LSQ==]]>
      </AuthToken>
      <WSA-ReplyTo>
        <![CDATA[ ]]>
      </WSA-ReplyTo>
      <NodeDN>
        <![CDATA[ ]]>
      </NodeDN>
      <OrigUser>
        <![CDATA[ QEDMO]]>
      </OrigUser>
      <OrigNode>
        <![CDATA[ QE_LOCAL]]>
      </OrigNode>
      <OrigProcess>
        <![CDATA[ QE_FLIGHTDATA]]>
      </OrigProcess>
      <OrigTimeStamp>2006-03-27T15:02:39.280000-0800</OrigTimeStamp>
      <DirectGatewayRequest />
    </From>
  </IBInfo>

```

```

<SyncServiceTimeout />
<ExternalMessageID>
  <![CDATA[ ]]>
</ExternalMessageID>
<SegmentsUnOrder>N
</SegmentsUnOrder>
<ConversationID>
  <![CDATA[ ]]>
</ConversationID>
<WSA-MessageID>
  <![CDATA[ ]]>
</WSA-MessageID>
<InReplyToID>
  <![CDATA[ ]]>
</InReplyToID>
<DataChunk>
  <![CDATA[ ]]>
</DataChunk>
<DataChunkCount>
  <![CDATA[ ]]>
</DataChunkCount>
</From>
<WS-Security>
  <WSTokenType>
    <![CDATA[ ]]>
  </WSTokenType>
</WS-Security>
<To>
  <DestinationNode>
    <![CDATA[ QE_IBTGT]]>
  </DestinationNode>
  <FinalDestinationNode>
    <![CDATA[ ]]>
  </FinalDestinationNode>
  <AppServerDomain>
    <![CDATA[ ]]>
  </AppServerDomain>
</To>
<Cookies>
  <![CDATA[ ]]>
</Cookies>
<PathInfo>
  <![CDATA[ ]]>
</PathInfo>
<HttpSession>
  <SessionID>
    <![CDATA[ ]]>
  </SessionID>
</HttpSession>
<QStrArgs />
<ContentSections>
  <ContentSection>
    <ID>ContentSection0</ID>
    <NonRepudiation>N</NonRepudiation>
    <Headers>
      <version>
        <![CDATA[ VERSION_1]]>
      </version>
      <encoding>
        <![CDATA[ base64(deflate)]]>
      </encoding>
      <encodedlength>
        <![CDATA[ 948(709)]]>
      </encodedlength>
      <length>
        <![CDATA[ 2840]]>
      </length>
    </Headers>
  </ContentSection>
</ContentSections>
<PublishNode>

```

```

    <![CDATA[ QE_LOCAL]]>
  </PublishNode>
  <Queue>
    <![CDATA[ QE_FLIGHTPLAN_CHNL]]>
  </Queue>
  <SubQueue>
    <![CDATA[ c9de8110-bde5-11da-be79-846b4e717ebf]]>
  </SubQueue>
  <VisitedNodes>
    <![CDATA[ QE_LOCAL]]>
  </VisitedNodes>
  <Connector>
    <ConnectorName>
      <![CDATA[ PSFTTARGET]]>
    </ConnectorName>
    <ConnectorClassName>
      <![CDATA[ PeopleSoftTargetConnector]]>
    </ConnectorClassName>
    <RemoteFrameworkURL>
      <![CDATA[ ]]>
    </RemoteFrameworkURL>
    <ConnectorParameters>
      <ConnectorParam>
        <Name>
          <![CDATA[ URL]]>
        </Name>
        <Value>
          <![CDATA[ ]]>
        </Value>
      </ConnectorParam>
    </ConnectorParameters>
    <ConnectorHeaders />
  </Connector>
  <AttachmentSection ResponseAsAttachment="N" />
</IBInfo>

```

While the basic structure is the same for all requests, not all elements are always required. An example of this is the Connector section. The Connector XML is used to tell the integration gateway to route a message to the named target connector. It also lists configuration parameters for the outbound request. This XML would only be seen in requests sent from the application server to the integration gateway. For requests going in the other direction, the section would be empty.

Note: The only element that is always required is *ExternalOperationName*.

The following is a list of the most important elements that may appear in the IBInfo section of a request message:

<i>Element</i>	<i>Description</i>
IBInfo / ExternalOperationName	The name of the requested service operation.
IBInfo / Operation Type	(Optional.) This is the type of service operation. The valid values are: asynchronous, synchronous and ping.
IBInfo / TransactionID	(Optional.) The transaction ID is used to uniquely identify a request.

Element	Description
IBInfo / From / RequestingNode	(Optional.) The requesting node is the node that sent the request to the current system.
IBInfo / From / Password	(Optional.) This is the password for the requesting node.
IBInfo / From / DN	(Optional.) For incoming requests, the DN gives the Distinguished Name extracted from the certificate authentication process.
IBInfo / From / OrigNode	(Optional.) For requests that cross multiple nodes, OrigNode is used to identify the node that initiated the request.
IBInfo / From / OrigTimeStamp	(Optional.) This timestamp corresponds to the time that the request was created. For requests that cross nodes, this is the time that the first request was created.
IBInfo / To / DestinationNode	(Optional.) This is the node to which the request will be delivered.
IBInfo / To / FinalDestinationNode	(Optional.) In cases where the message will be passed across several nodes, this value specifies the ultimate target of the message.
IBInfo / QStrArgs	(Optional.) Specific to incoming HTTP requests. These are the query string parameters found when the request was received by the HTTP listening connector.
IBInfo / Cookies	(Optional.) Specific to incoming HTTP requests. This is cookie string found when the request was received by the HTTP listening connector.
IBInfo / PathInfo	(Optional.) Specific to incoming HTTP requests. This is the path information extracted from the request.
IBInfo / ContentSections / ContentSection	(Optional.) This node provides metadata about the text present in the ContentSection.
IBInfo / ContentSections / ContentSection / ID	(Optional.) The index number of the content section.
IBInfo / ContentSections / ContentSection / NonRepudiation	(Optional.) Indicates as to whether nonrepudiation should be performed.

Element	Description
IBInfo / ContentSections / ContentSection / Headers	(Optional.) Provides additional information about the data.
IBInfo / PublishingNode	(Optional.) The node that published the message.
IBInfo / Queue	(Optional.) The queue to which the service operation was published.
IBInfo / InternalInfo / AppMsg / SubQueue	(Optional.) The subqueue to which the service operation was published.
IBInfo / InternalInfo / AppMsg / VisitedNodes	(Optional.) The list of nodes that have already received this message. This is useful when a message is being propagated across multiple nodes.
IBInfo / InternalInfo / AppMsg / PublicationID	(Optional.) The publication ID for this message.
IBInfo / Connector	(Optional.) Connector information instructs the gateway as to how to process the request.
IBInfo / Connector / ConnectorName	(Optional.) This is the proper name of the target connector to invoke to send the message.
IBInfo / Connector / ConnectorClassName	(Optional.) This is the class name of the target connector to invoke.
IBInfo / Connector / ConnectorParameters	(Optional.) Connector parameters are processing instructions for the target connector to be invoked.
IBInfo / Connector / ConnectorHeaders	(Optional.) Connector headers provide further metadata about the contents of the message to be sent.

IBRequest Content Section

The content section of a request message features the message body.

```
--Integration_Server_MIME_Boundary
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-ID: ContentSection0
Content-Disposition: inline
eJyd1l1P2zAUhu8n7T+g/gAKFDt6UYxOHCe1FH9gO1RwE1UMTUimTRRN27+fk7SpvwItD/F5
eJyd1l1P2zAUhu8n7T+7c TvG+c5WVz9/fl08ufhZfP46/lycn56NrlCnz8trklTVLRcG1kBb
4wCrguhGFoUjw9P382/3w TvG+8btJ+Ug4GT+6f1ZnM5UZNOAMxrlhF18mrnXk76wWTaaUzTRh
OuxU7FS9hpopBxEbC5lSSuY6gqtJ+Ug4GT+TUseK/q6hlyJhIIFY+fp8iwuE8yCYk40VpXgZVC
feml0ileSN1IRTYw+Ih1twFDBG569KUuhU/KKgBQ8HVDr37VGeUHDzW9FItdtbx9oK1JJAnnDsWO
```

```
xmcarihZbfBIxyv4FYKys2Y5YyAolHgVrDHskz4hMpQU+cJpYJRxb7REamlnnz8DakEpoYSHWs2i
PakJCLbR7T1kIPaZnhEzv0yTSqCnXcWT2z4hMpQU+EiZalfLSQZ0TNQGkPiJHQLR2I3pYFU3V5y
TqrWX/yq7iirzTIWpCos2blh9esVA0b4Mcm9831BORIJTWy//9q0JDg8AlNnc2ghbZrMQ6TFalnb
uBocflZQ59S0yAvjz0C3J3hsHd0lPQ/XFkLhUZVKYKJ1Q7n1zjGJbMs6q6heNqquSEMTN+Y2Em69
hCZ7X/bCbQts8yNfv67Rwrysnzfr+1fbWg5rFmj1Q7n1zjGJbMs6q6heNqquSEMTN++bT
7ro9tV/H6B7C1UN8GpbdsGmp9eXHRaO9i3DVScz7f37IZue0Bfv1z0DxwqQ49AGXRKPxh6BMrwU
J7tegSyiRRduR3se8TAgrehIBKmXSh6GHTQ5+POR1yANQ9lIb48ZH0YUykXAaYCMKVg5AEoh
J7tegSyiRRduR3se8TAgrehIBKmXSh6GHTQ5+I4LmhAuHlAGiHwQHCKvDjhcVax4iJAwPfAv4KCHOX0
/7PRRdw87utfFU53bp1X4K/MmvRDh5WLqFhyCJajVz4+qLr4SyEJnFjZhLeSWzyqPTx6KpgOh9k6D
/9z/lgQ1Ww==
```

Internal Message Format for Response Messages

The internal format for response messages parallels that for request messages, and has the same basic MIME structure. These messages are frequently referred to as IBResponse messages.

There are three logical components to a MIME response message: the IBResponse header section, the IBInfo section, and the Content section.

The following code shows an example of a response message:

```
Message-ID: <32004392.1143500580241.JavaMail.KCOLLIN2@PLE-KCOLLIN2>
Date: Mon, 27 Mar 2006 15:03:00 -0800 (PST)
Mime-Version: 1.0
Content-Type: multipart/related;
  boundary="-----= Part_4_9069393.1143500580221"
Content-ID: PeopleSoft-Integration-Broker-Internal-Mime-Message
PeopleSoft-ToolsRelease: 8.55

-----= Part_4_9069393.1143500580221
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-Disposition: inline
Content-ID: IBInfo

<?xml version="1.0"?><IBInfo><Status><StatusCode>0</StatusCode>
<MsgSet>158</MsgSet>

<MsgID>10000</MsgID><DefaultTitle>Integration Broker Response
Message</DefaultTitle>

</Status><ContentSections><ContentSection><ID>ContentSection0</ID>
<NonRepudiation>N</NonRepudiation></ContentSection></ContentSections></IBInfo>
-----= Part_4_7210339.1008355101202
```

IBResponse Header

The first part of a response message contains headers which describe the attributes of the whole message.

```
Message-ID: <32004392.1143500580241.JavaMail.KCOLLIN2@PLE-KCOLLIN2>
Date: Mon, 27 Mar 2006 15:03:00 -0800 (PST)
Mime-Version: 1.0
Content-Type: multipart/related;
  boundary="-----= Part_4_9069393.1143500580221"
Content-ID: PeopleSoft-Integration-Broker-Internal-Mime-Message
PeopleSoft-ToolsRelease: 8.55
```

IBResponse IBInfo Section

The format for the XML for the IBInfo for a response message is different than that for the request message. The following is a sample (formatted for easier reading):

```
<?xml version="1.0"?>
<IBInfo>
```

```

<Status>
  <StatusCode>0</StatusCode>
  <MsgSet>158</MsgSet>
  <MsgID>10000</MsgID>
  <DefaultMsg>OK</DefaultMsg>
  <DefaultTitle>Integration Broker Response Message</DefaultTitle>
</Status>
<ContentSections>
  <ContentSection>
    <ID>ContentSection0</ID>
    <NonRepudiation>N</NonRepudiation>
  </ContentSection>
</ContentSections>
</IBInfo>

```

The following is the list of all the elements that may be present in the IBInfo for a response message:

Element	Description
IBInfo / Status / StatusCode	Describes the result of the request. The possible values are: 0 (zero). Request successfully processed. 10. Temporary error occurred. Request can be resent. 20. Fatal error occurred. Do not resend request. 30. Request message is a duplicate of a message previously received.
IBInfo / Status / MsgSet	The MessageSetNumber for this message in the Message Catalog. Message set number 158 is assigned to the PeopleSoft Integration Broker.
IBInfo / Status / MsgID	The Message Number for this message in the Message Catalog. If no errors occurred during the processing of the request, the MsgID will be set to the value '10000'.
IBInfo / Status / DefaultTitle	Used if the message catalog is unavailable. This value corresponds to the "Message Text" for a given entry in the message catalog.
IBInfo / Status / DefaultMsg	Used if the message catalog is unavailable. This value corresponds to the "Explanation" for a given entry in the message catalog.
IBInfo / Status / Parameters	Parameters may be used to provide additional information for error responses.

Element	Description
IBInfo / ContentSection	A description of the content section returned with the response. Note: Not all response messages will have a content section. The structure of the content section and all child elements is the same as was seen in the request IBInfo.

IBResponse Content Section

The content section of a response message features the message body only when working with SyncRequests

```
<?xml version="1.0"?>
<TestXml>This is a sample response message.</TestXml>
```

Error Codes and Message Catalog Entries

A response message may contain data relating to the processing of the request message, or it may contain error information if there were problems in fulfilling the request.

The status code describes the nature of the response message. The following table describes possible request message status codes and their meaning.

Value	Meaning	Description
0	Success	The message transport and processing were successful.
10	Retry	The transport was not successful. PeopleSoft Integration Broker will perform its retry logic and send the message again.
20	Error	An error occurred.
30	Duplicate message	The transaction ID for the message has already been received.
40	Acknowledgement error	This status is used for SOAP messages and indicates that the contents of the data is not proper, but the transport was successful.

Value	Meaning	Description
50	Acknowledgement hold	Used for asynchronous chunking of messages from PeopleSoft to PeopleSoft nodes when sending multiple message segments.

All PeopleSoft Integration Broker error messages are stored in the message catalog. A short and long description for every error can be found there. Catalog entries are given a number, and this number is used in the response messages.

Here is a sample error message:

```

Message-ID: <32004392.1143500580241.JavaMail.KCOLLIN2@PLE-KCOLLIN2>
Date: Mon, 27 Mar 2006 15:03:00 -0800 (PST)
Mime-Version: 1.0
Content-Type: multipart/related;
  boundary="-----=_Part_4_9069393.1143500580221"
Content-ID: PeopleSoft-Integration-Broker-Internal-Mime-Message
PeopleSoft-ToolsRelease: 8.55

-----=_Part_25_2235074.1008270392277
Content-Type: text/plain; charset=UTF-8
Content-Transfer-Encoding: 8bit
Content-Disposition: inline
Content-ID: IBInfo

<?xml version="1.0"?><IBInfo><Status><StatusCode>10</StatusCode>
<MsgSet>158</MsgSet><MsgID>10721</MsgID><Parameters count="1"><Parm>404</Parm></Par=
ameters>
<DefaultTitle>Integration Gateway Error</DefaultTitle></Status></IBInfo>
-----=_Part_25_2235074.1008270392277--

```

All PeopleSoft Integration Broker errors use message set *158*. The actual error seen here is *10721*. Going to the message catalog, the description for message set *158*, error *10721* is:

```

Message Text: Integration Gateway - External System Contact Error

Explanation: Integration Gateway was not able to contact the external system.
The network location specified may be incorrect, or the site is permanently
or temporarily down.

```

Therefore this error was created by the integration gateway when it tried to send a request message to an external system.

Local Compression

This section provides an overview of local compression and discusses how to:

- Set local compression for asynchronous messages.
- Set local compression for synchronous messages.
- Override local compression for synchronous messages.

Understanding Local Compression

The integration engine compresses and base64-encodes messages destined for the PeopleSoft listening connector on its local integration gateway.

Setting Local Compression for Asynchronous Messages

Asynchronous messages are always compressed and base64 encoded when sent to the integration gateway. There are no settings you need to make.

Setting Local Compression for Synchronous Messages

In PSAdmin you can set a threshold message size above which the system compresses synchronous messages. The setting is shown here:

```
Values for config section - Integration Broker
  Min Message Size For Compression=10000
```

```
Do you want to change any values (y/n)? [n]:
```

The value is the message size in bytes; the default value is *10000* (10 kilobytes). You can specify a setting of *0* to compress all messages.

To turn off compression, set the value to *-1*.

Warning! Turning compression off can negatively impact system performance when transporting synchronous messages greater than 1 MB. As a result, you should turn off compression only during integration development and testing.

Note: This setting does not affect the compression of messages that the integration gateway sends using its target connectors.

Overriding Local Compression for Synchronous Messages

You can override the PSAdmin message compression setting for synchronous messages at the transaction level. The following method on the IBInfo object in the Message class is provided for this purpose:

```
&MSG.IBInfo.CompressionOverride
```

The valid parameters for this method are: %IntBroker_Compress, %IntBroker_UnCompress, and %IntBroker_Compress_Reset.

See “Understanding Message Classes” (PeopleCode API Reference)

Accessing IBInfo Elements Using PeopleCode

You can use the PeopleCode Message object to access IBRequest and IBResponse IBInfo data.

The following example demonstrates reading target connector information on a notification method for a rowset-based asynchronous message.

```
method OnNotify
  /* &MSG as Message */
  /* Extends/implements PS_PT:Integration:INotificationHandler.OnNotify */
  /* Variable Declaration */
```

```

integer &i;
string &strReturn;
rowset &RS;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfConnectorProperties()
/* get Query arguments */

    &strReturn = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgName(&i);
    &strReturn = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgValue(&i);

End-For;

/* access the content data */

&RS = &MSG.GetRowset();

end-method;

```

The following example demonstrates reading target connector information on notification method for a nonrowset-based asynchronous message.

```

method OnNotify
/+ &MSG as Message +/
/+ Extends/implements PS_PT:Integration:INotificationHandler.OnNotify +/
/* Variable Declaration */

integer &i;

string &&strReturn;

xmldoc &xmldoc;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfConnectorProperties()

    &strReturn = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgName(&i);
    &strReturn = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgValue(&i);

End-For;

/* access the content data */

&xmldoc = &MSG.GetXmlDoc();

end-method;

```

If an HTTP header is passed with a dollar sign (\$), PeopleSoft Integration Broker converts the dollar sign to an underscore (_).

PeopleSoft Rowset-Based Message Format

This section discusses the PeopleSoft rowset-based message format and discusses:

- FieldTypes section of a rowset-based message.
- MsgData section of a rowset-based message.
- PeopleSoft rowset-based message example.
- PeopleSoft timestamp format.
- CDATA and special characters.

- Schema restrictions.

This section also provides an example of a rowset-based message.

Related Links

[Message Part Structures](#)

Understanding the PeopleSoft Rowset-Based Message Format

To work with rowset-based messages—the PeopleSoft native format—you define a message in the PeopleSoft Pure Internet Architecture, insert records into the message definition in a hierarchical structure, and then populate the message and manipulate its contents by using the PeopleCode Rowset and Message classes. Externally, the message is transmitted as XML with a prescribed PeopleSoft schema.

The PeopleSoft message schema includes a PSCAMA record, which PeopleTools adds to every level of the message structure to convey basic information about the message and its data rows.

The Rowset and IntBroker classes are recommended for messaging between PeopleSoft applications. If a message is populated with data from a PeopleSoft application's database or component buffer, the Message class is best for handling that data.

Record and Field Aliases

You can specify an alias for any record or field in a rowset-based message definition. Each node participating in a transaction maintains its own independent definition of the message and its versions, including record and field names and their aliases.

When you send a message with an alias defined and the message is converted to XML for sending, only the alias appears in the XML. If you don't specify an alias, the original name is used. If the service operation is routed to multiple target nodes with different record or field naming schemes, you create for each target a separate service operation version with its own aliases and send each version separately.

The only requirement for a successful transaction is that the record and field names in the XML match either the original names or the aliases that are defined for that message and version at the node receiving the message. This behavior applies to both request and synchronous response messages, but typically only the source node applies aliases to accommodate the target node's naming scheme in both directions.

In a synchronous transaction, the request and response messages can be completely different from each other. Upon receiving a synchronous request, the target node generates and sends a response message. Upon receiving the response, the source node uses its defined aliases to find and reapply its original record and field names. The resulting inbound message contains the original names that were defined at the source node, not the aliases. Therefore, both the sending and receiving PeopleCode at the source node should expect to work with the source node's original record and field names.

Related Links

[PSCAMA](#)

[Understanding Integration PeopleCode](#)

[Understanding Filtering, Transformation, and Translation](#)

Rowset-Based Message Template

The following template shows the overall structure of a message in the PeopleSoft rowset-based message format:

```
<?xml version="1.0"?>
  <psft_message_name>
    <FieldTypes>
      ...
    </FieldTypes>
    <MsgData>
      <Transaction>
        ...
      </Transaction>
    </MsgData>
  </psft_message_name>
```

Note: *Psft_message_name* is the name of the message definition in the PeopleSoft database. Integration Broker inserts this message content into a standard PeopleSoft XML message wrapper for transmission.

FieldTypes Section

Each PeopleSoft message includes *field type* information. Field type information conveys the name of each data record and its constituent fields, along with each field's data type. Your receiving application can use this information to validate data types. The field type information is contained in the *FieldTypes* section of the message.

There are two *FieldTypes* tags:

- Each record tag consists of the name of a record, followed by a *class* attribute with a single valid value: *R*. The record tag encloses that record's field tags.
- Each field tag consists of the name of a field, followed by a *type* attribute with three valid values: *CHAR* for a character field, *DATE* for a date field, and *NUMBER* for a numeric field.

Following is a simple *FieldTypes* template.

```
<FieldTypes>
  <recordname1 class="R">
    <fieldname1 type="CHAR"/>
    <fieldname2 type="DATE"/>
    <fieldname3 type="NUMBER"/>
  </recordname1>
  <recordname2 class="R">
    <fieldname4 type="NUMBER"/>
  </recordname2>
</FieldTypes>
```

Note: Third-party sending applications must include a valid *FieldTypes* section in each message. The PeopleSoft system expects field type information for each record and field in the message.

MsgData Section

In addition to field type information, each PeopleSoft message contains data content in the *MsgData* section of the message. Between the *MsgData* tags are one or more *Transaction* sections. Each transaction represents one row of data.

Between the Transaction tags is a rowset hierarchy of records and fields. The record tags at each level contain the fields for that record, followed by any records at the next lower level.

The last record within a transaction is a fully specified PeopleSoft Common Application Message Attributes (PSCAMA) record, which provides information about the entire transaction. Immediately following the closing tag of *every* record below level 0 is a PSCAMA record containing only the AUDIT_ACTN field that specifies the action for that record.

Simple MsgData Template

Following is a simple MsgData template.

Note: The PSCAMA PUBLISH_RULE_ID and MSGNODENAME fields (shown emphasized) are used internally by certain PeopleSoft utilities, but third-party systems can generally ignore them and don't need to include them in messages.

```
<MsgData>
  <Transaction>
    <level0recname1 class="R">
      <fieldname1>value</fieldname1>
      <fieldname2>value</fieldname2>
      <level1recname1 class="R">
        <fieldname3>value</fieldname3>
        <fieldname4>value</fieldname4>
      </level1recname1>
      <PSCAMA class="R">
        <AUDIT_ACTN>value</AUDIT_ACTN>
      </PSCAMA>
      <level1recname2 class="R">
        <fieldname5>value</fieldname5>
      </level1recname2>
      <PSCAMA class="R">
        <AUDIT_ACTN>value</AUDIT_ACTN>
      </PSCAMA>
    </level0recname1>
    <level0recname2 class="R">
      <fieldname6>value</fieldname6>
    </level0recname2>
    <PSCAMA class="R">
      <LANGUAGE_CD>value</LANGUAGE_CD>
      <AUDIT_ACTN>value</AUDIT_ACTN>
      <BASE_LANGUAGE_CD>value</BASE_LANGUAGE_CD>
      <MSG_SEQ_FLG>value</MSG_SEQ_FLG>
      <PROCESS_INSTANCE>value</PROCESS_INSTANCE><PUBLISH_RULE_ID>value</PUBLISH_
RULE_ID><MSGNODENAME>value</MSGNODENAME>
    </PSCAMA>
  </Transaction>
</MsgData>
```

Related Links

[PSCAMA](#)

PSCAMA

PeopleTools adds the PSCAMA record to every level of the message structure during processing. It isn't accessible in the message definition, but you can reference it as part of the Message object in the sending and receiving PeopleCode, and you can see it in the Integration Broker Monitor. PeopleCode processes this record the same way as any other record.

Note: PSCAMA records are automatically included in messages only if you insert database records to define the message structure. You can use the PeopleCode XmlDoc class to handle an inbound message containing PSCAMA records, but the PeopleCode Message class is much better suited for this.

PSCAMA contains fields that are common to all messages. The <PSCAMA> tag repeats for each row in each level of the transaction section of the message. The sender can set PSCAMA fields to provide basic information about the message; for example, to indicate the message language or the type of transaction a row represents. When receiving a message, your PeopleCode should inspect the PSCAMA records for this information and respond accordingly.

PSCAMA Record Definition

The PSCAMA record definition includes the following fields:

<i>Term</i>	<i>Definition</i>
LANGUAGE_CD	Indicates the language in which the message is generated, so the receiving application can take that information into account when processing the message. When sending a message with component PeopleCode, the system sets this field to the user's default language code.
AUDIT_ACTN	Identifies each row of data as an Add, Change, or Delete action.
BASE_LANGUAGE_CD	(Optional.) Indicates the base language of the sending database. This is used by generic, full-table subscription PeopleCode to help determine which tables to update.
MSG_SEQ_FLG	(Optional.) Supports the transmission of large transactions that may span multiple messages. Indicates whether the message is a header (<i>H</i>) or trailer (<i>T</i>) or contains data (blank). The header and trailer messages don't contain message data. The receiving system can use this information to determine the start and end of the set of messages and initiate processes accordingly. For example, the header message might cause staging tables to be cleared, while the trailer might indicate that all of the data has been received and an update job should be initiated.
PROCESS_INSTANCE	(Optional.) Process instance of the batch job that created the message. Along with the sending node and publication ID, the receiving node can use this to identify a group of messages from the sending node.

Term	Definition
PUBLISH_RULE_ID	(Optional.) Indicates the publish rule that is invoked to create the message. This is used by routing PeopleCode to locate the appropriate chunking rule, which then determines to which nodes the message should be sent. Third-party applications can ignore this field.
MSGNODENAME	(Optional.) The node to which the message should be sent. This field is passed to the Publish utility by the Application Engine program. Routing PeopleCode must look for a value in this field and return that value to the application server. Third-party applications can ignore this field.

Language Codes

Each message can contain only one language code (the LANGUAGE_CD field) in the first PSCAMA record.

PeopleSoft language codes contain three characters and are mapped to corresponding International Organization for Standardization (ISO) locale codes in an external properties file. This mapping enables the PeopleSoft Pure Internet Architecture to derive certain defaults from the ISO locales that are stored in a user's browser settings. Your PeopleSoft application is delivered with a set of predefined language codes; you can define your own codes, as well.

Note: There can be only one language code for the entire message. To send messages in multiple languages, send multiple messages.

See “Understanding International Preferences” (Global Technology).

Audit Action Codes

A PSCAMA record appears following each row of the message. At a minimum, it contains an audit action code (the AUDIT_ACTN field), denoting the action to be applied to the data row. The audit action is required so that the receiving system knows how to process the incoming data.

The valid audit action codes match those that are used in the PeopleSoft audit trail processing: *A*, *C*, *D*, *K*, *N*, *O*, and blank.

The audit action values are set by the system or by the sending PeopleCode to specify that a record should be added, changed, or deleted:

<i>Audit Action Code</i>	<i>Description</i>
<i>A</i>	Add a noneffective or effective-dated row. To add an effective-dated row, the value is <i>A</i>. If you populate the row data by using the CopyRowsetDeltaOriginal method in the PeopleCode Message class, an additional record is created with an audit action value of <i>O</i>, containing the original values of the current effective-dated row.
<i>C</i>	Change non-key values in a row.
<i>D</i>	Delete a row.
<i>K</i>	If you change at least one key value in a row (in addition to any non-key values) and then populate the row data by using the CopyRowsetDeltaOriginal or CopyRowsetDelta methods in the Message class, an additional record is created with an audit action value of <i>K</i>, containing the original values of the current effective-dated row.
<i>N</i>	Change at least one key value in a row (in addition to any non-key values).
<i>O</i>	If you change non-key values in a row and populate the row data by using the CopyRowsetDeltaOriginal method in the Message class, an additional record is created with an audit action value of <i>O</i>, containing the original values of the current effective-dated row.
Blank	Default value. If a row's content hasn't changed, the value is blank. This audit action code is also used to tag the parents of rows that have changed.

Other PSCAMA Considerations

You can update values on the PSCAMA record just like any other record in the message definition before sending the message.

The receiving process can access the fields in this record just like any other fields in the message.

The size of the PSCAMA record varies. In particular, notice a difference between the first PSCAMA record and the ones that follow. The first record contains all of the fields, while the other PSCAMA records have only the AUDIT_ACTN field, which is the only field that can differ for each row of data.

Although the first PSCAMA record is always present, not all of the remaining PSCAMA records are sent in the message. If a <PSCAMA> tag is not included for a specific row, you can assume that the row hasn't changed. In addition, if the <AUDIT_ACTN> tag is blank or null, you can also assume the row hasn't changed.

If you're receiving a message that has incremental changes, only the rows that have changed *and their parent rows* are present in the message.

You can view an example of an outbound message with the PSCAMA records inserted by testing your message definition using the Schema Tester.

See "Understanding the Schema Tester Utility" (Integration Broker Testing Utilities and Tools).

Identifying Changes to Field-Level Attributes

When sending and receiving messages, all blank data values get stripped. As a result, you cannot determine if a field value is blank by definition, or if its value was stripped in the messaging process.

The PeopleCode CopyRowset functions CopyRowset, CopyRowsetDelta and CopyRowsetDeltaOriginal, feature an IsChanged attribute that automatically gets set to identify fields that have been changed. Any field that has been changed displays the attribute *IsChanged="Y"*.

Note: The IsChanged attribute applies only to rowset-based messages. For rowset-based message parts, use the Message Part Default Indicator field to distinguish blanks from zeros in part messages. The IsChanged attribute does not apply to nonrowset-based messages, including nonrowset-based container messages and nonrowset-based part messages.

For example:

```
<QE_ACNUMBER IsChanged="Y">2</QE_ACNUMBER>
```

Fields that had data and then were blanked contain the IsChanged attribute.

For example:

```
<DESCRLONG IsChanged="Y"/>
```

Fields that were always blank and thus were not changed do not feature this attribute. For example:

```
<QE_NAVDESC/>
```

If you are writing subscription PeopleCode you reference the IsChanged value of the field in the message rowset, as always. However, the blanks appear with the attribute *IsChanged="Y"*.

Related Links

[Distinguishing Blank from Zero in Rowset-Based Part Messages](#)

PeopleSoft Timestamp Format

The PeopleSoft format for all timestamps is ISO-8601. If any message fields are type timestamp, the following format is used:

```
CCYY-MM-DDTHH:MM:SS.ssssss+/-hhmm
```

Note: The ISO format specifies that the +/-hhmm parameter is optional, but PeopleSoft requires it. All date and time stamps in the header and the body of the message must include the Greenwich Mean Time (GMT) offset as +/-hhmm. This ensures that the timestamp is correctly understood by the receiving application.

CDATA and Special Characters

Consider the following points regarding rowset-based messages:

- You cannot use CDATA in message XML if you plan to use GetRowSet to parse the message.
- When using the ampersand character (&) in a string, it must be URL-encoded. For example: *&*. Passing only the ampersand character results in a PeopleCode error when you get the rowset values.
- Other special characters are best passed encoded as well, such as *>* for “<” and *<* for “>.”

Schema Restrictions

For stronger schema validation control, some PeopleSoft field types have certain implicit restrictions regarding the format of field data that is acceptable in a runtime message. These restrictions appear in message schema.

The restrictions apply to fields having the following formats.

- Mixed case.
- Name.
- Phone number.
- Social security number.
- Uppercase.
- Zip code.

Note: These restrictions apply to rowset-based messages and rowset-based message parts.

The restrictions for each are shown in the following example:

```
<xsd:simpleType name="BASE_LANGUAGE_CD_TypeDef">
  <xsd:annotation>
    <xsd:documentation>BASE_LANGUAGE_CD is a character of length 3.
      Allows Uppercase characters including numbers
    </xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="3"/>
    <xsd:whiteSpace value="preserve"/>
  </xsd:restriction>
</xsd:simpleType>
```

```

    <xsd:pattern value="([A-Z]|[0-9]|\p{Z}|\p{P}|\p{Lu})*"/>
  </xsd:restriction>
</xsd:simpleType>

```

Rowset-Based Message Example

The message data is enclosed in a tag with the name of the message, and consists of one FieldTypes section followed by one MsgData section. The FieldTypes section describes the records and fields that appear in the MsgData section, which contains the actual data.

Note: The PSCAMA record requires field type information just like any other record.

```

<SDK_BUS_EXP_APPR_MSG>
  <FieldTypes>
    <SDK_BUS_EXP_PER class="R">
      <SDK_EMPLID type="CHAR"/>
      <SDK_EXP_PER_DT type="DATE"/>
      <SDK_SUBMIT_FLG type="CHAR"/>
      <SDK_INTL_FLG type="CHAR"/>
      <SDK_APPR_STATUS type="CHAR"/>
      <SDK_APPR_INSTANCE type="NUMBER"/>
      <SDK_DESCR type="CHAR"/>
      <SDK_COMMENTS type="CHAR"/>
    </SDK_BUS_EXP_PER>
    <SDK_DERIVED class="R">
      <SDK_BUS_EXP_SUM type="NUMBER"/>
    </SDK_DERIVED>
    <SDK_BUS_EXP_DTL class="R">
      <SDK_CHARGE_DT type="DATE"/>
      <SDK_EXPENSE_CD type="CHAR"/>
      <SDK_EXPENSE_AMT type="NUMBER"/>
      <SDK_CURRENCY_CD type="CHAR"/>
      <SDK_BUS_PURPOSE type="CHAR"/>
      <SDK_DEPTID type="CHAR"/>
    </SDK_BUS_EXP_DTL>
    <PSCAMA class="R">
      <LANGUAGE_CD type="CHAR"/>
      <AUDIT_ACTN type="CHAR"/>
      <BASE_LANGUAGE_CD type="CHAR"/>
      <MSG_SEQ_FLG type="CHAR"/>
      <PROCESS_INSTANCE type="NUMBER"/>
    </PSCAMA>
  </FieldTypes>
  <MsgData>
    <Transaction>
      <SDK_BUS_EXP_PER class="R">
        <SDK_EMPLID>8001</SDK_EMPLID>
        <SDK_EXP_PER_DT>1998-08-22</SDK_EXP_PER_DT>
        <SDK_SUBMIT_FLG>N</SDK_SUBMIT_FLG>
        <SDK_INTL_FLG>N</SDK_INTL_FLG>
        <SDK_APPR_STATUS>P</SDK_APPR_STATUS>
        <SDK_APPR_INSTANCE>0</SDK_APPR_INSTANCE>
        <SDK_DESCR>Regional Users Group Meeting</SDK_DESCR>
        <SDK_COMMENTS>Attending Northeast Regional Users Group
        Meeting and presented new release functionality.
        </SDK_COMMENTS>
      <SDK_BUS_EXP_DTL class="R">
        <SDK_CHARGE_DT>1998-08-22</SDK_CHARGE_DT>
        <SDK_EXPENSE_CD>10</SDK_EXPENSE_CD>
        <SDK_EXPENSE_AMT>45.690</SDK_EXPENSE_AMT>
        <SDK_CURRENCY_CD>USD</SDK_CURRENCY_CD>
        <SDK_BUS_PURPOSE>Drive to Meeting</SDK_BUS_PURPOSE>
        <SDK_DEPTID>10100</SDK_DEPTID>
      </SDK_BUS_EXP_DTL>
      <PSCAMA class="R">
        <AUDIT_ACTN>A</AUDIT_ACTN>
      </PSCAMA>
    </Transaction>
  </MsgData>
</SDK_BUS_EXP_APPR_MSG>

```

```

<SDK_BUS_EXP_DTL class="R">
  <SDK_CHARGE_DT>1998-08-22</SDK_CHARGE_DT>
  <SDK_EXPENSE_CD>09</SDK_EXPENSE_CD>
  <SDK_EXPENSE_AMT>12.440</SDK_EXPENSE_AMT>
  <SDK_CURRENCY_CD>USD</SDK_CURRENCY_CD>
  <SDK_BUS_PURPOSE>City Parking</SDK_BUS_PURPOSE>
  <SDK_DEPTID>10100</SDK_DEPTID>
</SDK_BUS_EXP_DTL>
<PSCAMA class="R">
  <AUDIT_ACTN>A</AUDIT_ACTN>
</PSCAMA>
</SDK_BUS_EXP_PER>
<SDK_DERIVED class="R">
  <SDK_BUS_EXP_SUM>58.13</SDK_BUS_EXP_SUM>
</SDK_DERIVED>
<PSCAMA class="R">
  <LANGUAGE_CD>ENG</LANGUAGE_CD>
  <AUDIT_ACTN>A</AUDIT_ACTN>
  <BASE_LANGUAGE_CD>ENG</BASE_LANGUAGE_CD>
  <MSG_SEQ_FLG></MSG_SEQ_FLG>
  <PROCESS_INSTANCE>0</PROCESS_INSTANCE>
</PSCAMA>
</Transaction>
</MsgData>
</SDK_BUS_EXP_APPR_MSG>

```

Nonrowset-Based Message Structures

This section discusses nonrowset-based message structures that you can use with PeopleSoft Integration Broker. This section discusses:

- XML messages.
- SOAP-compliant messages.
- Non-XML files.

XML Messages

The World Wide Web Consortium (W3C) has established a Document Object Model (DOM) for accessing and manipulating structured data. The DOM specifies a standardized application programming interface (API) that provides a consistent, familiar way to work with almost any XML data. This API—the XML DOM—enables you to create, retrieve, navigate, and modify messages.

You define an XML message in the PeopleSoft Pure Internet Architecture by either uploading an XML file or entering an XML schema definition. The following example shows an XML message schema:

```

<?xml version="1.0"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema" targetNamespace=
"http://xmlns.oracle.com/Common/schemas/COMPANY" xmlns="http://xmlns.
oracle.com/Common/schemas/COMPANY" elementFormDefault="qualified">
  <xsd:element name="Company" type="CompanyType"/>
  <xsd:complexType name="CompanyType">
    <xsd:sequence>
      <xsd:element name="Person" type="PersonType"/>
      <xsd:element name="Product" type="ProductType"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="PersonType">
    <xsd:sequence>
      <xsd:element name="Name" type="xsd:string"/>

```

```

        <xsd:element name="SSN" type="xsd:string"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ProductType">
    <xsd:sequence>
        <xsd:element name="Type" type="xsd:string"/>
    </xsd:sequence>
</xsd:complexType>
</xsd:schema>

```

Then populate the message and manipulate its contents by using the PeopleCode XmlDoc class and built-in functions, which reflect the XML DOM.

Note: You can use the XmlDoc class to access inbound, rowset-based messages; however, the PeopleCode Message and Rowset classes handle the PeopleSoft native format more easily.

Use the XmlDoc class if *any* of the following is true:

- The message structure doesn't fit the PeopleSoft rowset model.
- The message data doesn't come from PeopleSoft database records.
- The third-party source or target node requires non-XML message data.

Although you can use the XmlDoc class to generate or process messages that use the SOAP protocol, the PeopleCode SoapDoc class is more efficient and is strongly recommended.

Note: Non-XML message data must be embedded in an XML wrapper, which you send and receive by using the XmlDoc class.

Note: Due to the way in which the parser constructs content models for elements with complex content, specifying large values for the minOccurs or maxOccurs attributes may cause the parser to throw a StackOverflowError. Large values for minOccurs should be avoided, and unbounded should be used instead of a large value for maxOccurs.

SOAP-Compliant Messages

The W3C SOAP specification defines synchronous transactions in a distributed web environment. SOAP is appropriate for Universal Description, Discovery, and Integration (UDDI) interactions, or to interact with SOAP-compliant servers.

You define a message in PeopleSoft Application Designer without inserting any records to define its structure, then populate the message and manipulate its contents by using the PeopleCode SoapDoc class and built-in functions, which comply with the W3C SOAP specification. The SoapDoc class is well-suited for messages that are populated with SOAP-compliant XML data.

SoapDoc complies with the W3C XML DOM specification. The SoapDoc class is based on the PeopleCode XmlDoc class, with some identical methods and properties. To send and receive SoapDoc messages, you must convert them to XmlDoc objects and use the XmlDoc built-in functions, SyncRequestXmlDoc and GetMessageXmlDoc. SoapDoc provides a property for handling the conversion easily.

Use the SoapDoc class if *all* of the following are true:

- The third-party source or target node requires SOAP-compliant messages.

- The third-party source or target node requires synchronous transactions.
- The message conforms to the SOAP specification.

Related Links

Generating and Sending Messages

Receiving and Processing Messages

Non-XML Files

To send non-XML files through PeopleSoft Integration Broker to their destination, you must wrap them in the PeopleSoft non-XML message element, CDATA. However, when you send messages to third-party systems, the recipient systems may not be able to interpret that element.

The Message class features a method, SetXMLDoc, that you can use to remove the tags upon execution of the method. Another alternative to removing the tags is to write a transformation to do so. If you do not use either option, the data remains in the wrapper through to the destination.

The following code example shows a non-XML file wrapped in the PeopleSoft non-XML message element, `PsNonXml`, for transport through PeopleSoft Integration Broker:

Note: The element PsNonXml is not case-sensitive.

[illegible]

The following example shows an alternative way to wrap a non-XML file in the PeopleSoft non-XML message element for transport through PeopleSoft Integration Broker:

[illegible]

```
</AsyncRequest>
```

The following example shows using the SetXMLDoc method to remove the PsNonXML wrapper from a message:

```
// create xmldoc with PSNonXml tag and load it into the message

// create an instance of the Message object
&MSG = CreateMessage(OPERATION.QE_F18_ASYNC_XMLDOC);

// Load the Message object via the SetXmlDoc method with the xmldoc data.
// This will also remove the PSNonXml wrapper
&MSG.SetXmlDoc(&XmlDoc);

// perform a publish for the nonrowset-based message
%IntBroker.Publish(&MSG);
```

As stated previously in this section, if you do not use the SetXMLDoc method to remove the PsNonXml wrapper, you must write a transformation to physically remove the tags.

Related Links

“Understanding Message Classes” (PeopleCode API Reference)

[Understanding Filtering, Transformation, and Translation](#)

“Complying With Message Formatting and Transmission Requirements” (Integration Broker Administration)

Using Nonrowset-Based Messages in Service Operations Exposed as WSDL

If a nonrowset-based message is used in a service operation which will be exposed as a WSDL to third parties, the schema cannot be empty. The schema has to have at least the header elements, as shown in the following example:

```
<?xml version="1.0"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"/>
```

Message Part Structures

This section discusses:

- Rowset-based message parts.
- Nonrowset-based message parts.

Understanding Message Part Structures

Message parts are rowset-based messages or nonrowset-based messages that you designate as a part message on the message definition. Message parts are used in container messages

Message parts can be re-used in multiple containers.

All parts in a container must be of the same type (Rowset-based or Nonrowset-based).

You create messages using the Message Builder page in the PeopleSoft Pure Internet Architecture.

Related Links

[PeopleSoft Rowset-Based Message Format](#)

[Nonrowset-Based Message Structures](#)

[Understanding Managing Messages](#)

Rowset-Based Message Parts

Rowset-based message parts provide all the ease of use of using rowsets, yet the generated XML message is industry standard and not PeopleSoft proprietary. Rowset-based message parts, like nonrowset-based parts, can only be part of a container type message.

These are the benefits of using Rowset-based parts:

- The XML schema generated is standard XML and not the PeopleSoft message format. Rowset-based message parts do not have a PSCAMA section, FieldTypes section, IsChanged attributes, and so forth.
- The message API for rowset-based parts is simple to use and understand.
- XML serialization and deserialization to and from part rowset is provided by Integration Broker framework.
- You can use a CopyRowSet type method to populate the rowset from another rowset (component rowset).

The following example shows a sample schema from a rowset-based message part:

```
<?xml version="1.0"?>
<xsd:schema elementFormDefault="qualified" targetNamespace="http://xmlns.
oracle.com/Enterprise/Tools/schemas/Part_1.V1" xmlns="http://xmlns.oracle.
com/Enterprise/Tools/schemas/Part_1.V1" xmlns:xsd="http://www.w3.org/
2001/XMLSchema">
  <xsd:element name="Part_1" type="Part_1_TypeShape"/>
  <xsd:complexType name="Part_1_TypeShape">
    <xsd:sequence>
      <xsd:element name="First_Part" type="First_PartMsgDataRecord_TypeShape"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="First_PartMsgDataRecord_TypeShape">
    <xsd:sequence>
      <xsd:element name="QE_ACNUMBER" type="QE_ACNUMBER_TypeDef"/>
      <xsd:element name="QE_WAYPOINT_NBR" type="QE_WAYPOINT_NBR_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_BEARING" type="QE_BEARING_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_RANGE" type="QE_RANGE_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_ALTITUDE" type="QE_ALTITUDE_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_LATITUDE" type="QE_LATITUDE_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_LONGITUDE" type="QE_LONGITUDE_TypeDef"/>
      <xsd:element name="QE_HEADING" type="QE_HEADING_TypeDef"/>
      <xsd:element name="QE_VELOCITIES" type="QE_VELOCITIES_TypeDef"/>
      <xsd:element minOccurs="0" name="QE_NAVDESC" type="QE_NAVDESC_TypeDef"/>
    </xsd:sequence>
    <xsd:attribute fixed="R" name="class" type="xsd:string" use="required"/>
  </xsd:complexType>
  <xsd:simpleType name="QE_ACNUMBER_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_ACNUMBER is a number of length 10 with a decimal
        position of 0</xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:integer">
      <xsd:totalDigits value="10"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_WAYPOINT_NBR_TypeDef">
```

```

    <xsd:annotation>
      <xsd:documentation>QE_WAYPOINT_NBR is a number of length 3 with a decimal
        position of 0</xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:integer">
      <xsd:totalDigits value="3"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_BEARING_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_BEARING is a character of length 10</xsd:documentation>=>

    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="10"/>
      <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_RANGE_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_RANGE is a character of length 10</xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="10"/>
      <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_ALTITUDE_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_ALTITUDE is a character of length 10</xsd:documentation>=>
>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="10"/>
      <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_LATITUDE_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_LATITUDE is a character of length 15
    </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="15"/>
      <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_LONGITUDE_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_LONGITUDE is a character of length 15
    </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="15"/>
      <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_HEADING_TypeDef">
    <xsd:annotation>
      <xsd:documentation>QE_HEADING is a character of length 4
    </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="MAG"/>
      <xsd:enumeration value="TRUE"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="QE_VELOCITIES_TypeDef">
    <xsd:annotation>

```

```

        <xsd:documentation>QE_VELOCITIES is a character of length 4
    </xsd:documentation>
</xsd:annotation>
<xsd:restriction base="xsd:string">
    <xsd:enumeration value="ADC"/>
    <xsd:enumeration value="GPS"/>
    <xsd:enumeration value="INS"/>
</xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="QE_NAVDESC_TypeDef">
    <xsd:annotation>
        <xsd:documentation>QE_NAVDESC is a character of length 30
    </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="30"/>
        <xsd:whiteSpace value="preserve"/>
    </xsd:restriction>
</xsd:simpleType>
</xsd:schema>

```

Nonrowset-Based Message Parts

A nonrowset-based message part schema is similar to a regular nonrowset-based message, however a nonrowset-based message part can be reused in multiple containers.

Message Container Structures

Message container structures hold rowset-based or nonrowset-based message part structures. All message parts assigned to a container must of the same type, rowset-based or nonrowset-based.

A message container is always a nonrowset-based message.

You create container messages using the Message Builder in the PeopleSoft Pure Internet Architecture.

Related Links

[Nonrowset-Based Message Structures](#)

[Understanding Managing Messages](#)

Example 1: XML Schema of a Container Message with Rowset-Based Message Parts

The following example shows a sample schema of a container message with three rowset-based message parts:

```

<?xml version="1.0"?>
<xsd:schema elementFormDefault="unqualified" targetNamespace="http://xmlns.
oracle.com/Enterprise/Tools/schemas/Part_Container.V1"
xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/Part_Container.V1"
xmlns:Part_1.V1="http://xmlns.oracle.com/Enterprise/Tools/schemas/Part_1.V1"
xmlns:Part_2.V1="http://xmlns.oracle.com/Enterprise/Tools/schemas/Part_2.V1"
xmlns:Part_3.V1="http://xmlns.oracle.com/Enterprise/Tools/schemas/Part_3.V1"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/
Part_1.V1" schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft
ServiceListeningConnector?Operation=GetSchema&xsd=Part_1.V1"/>
    <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/
Part_3.V1" schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft

```

```

    ServiceListeningConnector?Operation=GetSchema&xsd=Part_3.V1"/>
<xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/
    Part_2.V1" schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft
    ServiceListeningConnector?Operation=GetSchema&xsd=Part_2.V1"/>
<xsd:element name="Part_Container" type="Part_ContainerType"/>
<xsd:complexType name="Part_ContainerType">
  <xsd:sequence>
    <xsd:element maxOccurs="unbounded" minOccurs="0" name="Part_1" type="
      Part_1.V1:Part_1_TypeShape"/>
    <xsd:element maxOccurs="10" minOccurs="0" name="Part_3" type="Part_3.V1:
      Part_3_TypeShape"/>
    <xsd:element maxOccurs="unbounded" minOccurs="0" name="Part_2" type="
      Part_2.V1:Part_2_TypeShape"/>
  </xsd:sequence>
</xsd:complexType>
</xsd:schema>

```

Example 2: XML Schema of a Container Message with Nonrowset-Based Message Parts

The following example shows a sample schema from a container message that contains three nonrowset-based parts:

```

<?xml version="1.0"?>
<xsd:schema elementFormDefault="unqualified" targetNamespace="http://xmlns.
  oracle.com/Enterprise/Tools/schemas/NonRowSetContainer.v1"
  xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/NonRowSetContainer.v1"
  xmlns:Part_One_NonRowset.v1="http://xmlns.oracle.com/Enterprise/Tools/
    schemas/Part_One.v1"
  xmlns:Part_Three_NonRowset.v1="http://xmlns.oracle.com/Enterprise/Tools/
    schemas/Part_Two.v1"
  xmlns:Part_Two_NonRowset.v1="http://xmlns.oracle.com/Enterprise/Tools/
    schemas/Part_Three.v1"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft
    ServiceListeningConnector?Operation=GetSchema&xsd=Part_One_NonRowset.v1"/>
  <xsd:import schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft
    ServiceListeningConnector?Operation=GetSchema&xsd=Part_Two_NonRowset.v1"/>
  <xsd:import schemaLocation="http://kcollin2042803:5000/PSIGW/PeopleSoft
    ServiceListeningConnector?Operation=GetSchema&xsd=Part_Three_Non
    Rowset.v1"/>
  <xsd:element name="NonRowSetContainer" type="NonRowSetContainerType"/>
  <xsd:complexType name="NonRowSetContainerType">
    <xsd:sequence>
      <xsd:element maxOccurs="unbounded" minOccurs="0" name="Part_One_NonRowset"
        type="Part_One_NonRowset.v1:Part_One_TypeShape"/>
      <xsd:element maxOccurs="unbounded" minOccurs="0" name="Part_Two_NonRowset"
        type="Part_Two_NonRowset.v1:Part_Two_TypeShape"/>
      <xsd:element maxOccurs="unbounded" minOccurs="0" name="Part_Three_NonRowset"
        type="Part_Three_NonRowset.v1:Part_Three_TypeShape"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>

```

Managing Messages

Understanding Managing Messages

This section provides an overview of messages.

Message Definitions

Message definitions provide the physical description of the data that is being sent, including fields, field types, and field lengths. You create message definitions in the PeopleSoft Internet Architecture.

Note: Messages are shapes that describe the contents of a service operation transaction. Unlike prior PeopleTools releases, messages do not contain any processing logic. All processing logic is defined in service operations, using service operation handlers.

Message Types

Five types of messages are available:

<i>Term</i>	<i>Definition</i>
Rowset-based messages	For hierarchical data that is based on PeopleSoft records, you create a message definition by assembling records, organizing them into a hierarchy, and selecting fields from those records to include in the message. The result is a rowset that doesn't need to match an existing rowset structure in the application. Use the PeopleCode Rowset and operation classes to generate, send, receive, and process these messages.
Nonrowset-based messages	These messages can have virtually any structure and content. You create a message definition, but you do not insert any records. The message definition serves as a placeholder for the actual message. Use the PeopleCode XmlDocument and operation classes to generate, send, receive, and process these messages. If you're handling Simple Object Access Protocol (SOAP) compliant data, you can also use the SoapDoc class to generate and process these messages. The message schema can be XML or JSON. For a SOAP message the schema must be XML

Term	Definition
Container messages	A container message is a nonrowset-based message that holds one or more part messages. A container message must contain all rowset-based messages <i>or</i> all nonrowset-based message parts.
Message parts	Message parts are rowset-based messages or nonrowset-based messages that you designate as a part message, to be used in a container message.
Document messages	A document messages are messages based on the PeopleSoft XML document technology. You create and manage these messages in the PeopleSoft Document Builder, either by creating the XML documents from the ground up, importing them from schema definitions, or from PeopleSoft records.

The following table describes when to use a given message type:

Message Type	When to Use
Rowset-based message.	All PeopleSoft-to-PeopleSoft integrations.
Nonrowset-based message.	Integrations with third-party systems.
Container message with rowset-based message parts.	Exposing PeopleSoft services to third-party systems.
Container message with nonrowset-based message parts.	Exposing PeopleSoft services to third-party systems and need to provide nested parts.
Document message.	Integrations with third-party systems.

Naming Conventions for Message Metadata

When naming the following message metadata, names cannot start with “xml,” digits or special characters:

- Message names.
- Message aliases.
- Record aliases.
- Field aliases.

Message Record Structure

If a message handles PeopleSoft record data, that is, a rowset-based message, you must insert records in the message definition in an appropriate hierarchical structure.

However, if the message data doesn't map to a record hierarchy, do not insert any records. You supply or receive the data and its structure from an external source, using the PeopleCode XmlDoc or SoapDoc classes.

See [Understanding Sending and Receiving Messages](#).

Underlying Record Definitions

Records that you insert in a message definition have live references to the original record definitions. Any change that you make to an underlying record definition is automatically reflected by a change in the corresponding record in the message definition.

Fields Defined as Uppercase

If a message definition includes character fields that are defined as uppercase, then character data in those fields is automatically converted to uppercase when the message is received. This happens when the receiving PeopleCode inserts the message data in a rowset, and it overrides any previous changes in the data, including transformation and data translation.

Message Aliases and Message Versions

Message aliases are read-only once you save the message definition. As a result, once you create a message alias for a message definition, any subsequent versions of the message that you create use the original alias.

Restrictions for Modifying Messages

This section lists the conditions under which a message may become restricted and read-only. This list applies to all message types, including rowset-based messages, nonrowset-based messages, container messages, part messages, and subpart messages.

You cannot modify a message if one or more of the following conditions exists:

- The service to which a message is contained in a restricted service.
- The message is used internally by the system. For example, the delivered IB_GENERIC message is read-only and is used internally by the system.
- The message is referenced in the runtime tables.

To work around this, you must remove any entries in the runtime tables that reference the message.

- The message is used in a service operation where WSDL documents have been generated.
- The message is used in a service operation that has validation enabled.

Searching for Message Definitions

To search for an existing message definition in the system use the Messages - Search page (IB_MSGSEARCH). To access the page select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.

This example illustrates the Messages – Search page.

To search for a message definition:

1. Access the Messages - Search page (**PeopleTools > Integration Broker > Integration Setup > Message Definitions**).
2. Search for a message definition.

You can search for message definition in one of two ways:

- Enter search criteria in one or more of the following fields, and then click the **Search** button:

<i>Field or Control</i>	<i>Description</i>
Type	From the drop-down list, select the type of message for which you are searching. The options are: • <i>Container.</i> • <i>Document.</i> • <i>Nonrowset.</i> • <i>Part nonrowset.</i> • <i>Part rowset.</i> • <i>Rowset.</i>
Message Name	Enter the name of the message.
Version	Enter the version of the message.

- Click the **Search** button to display all message definitions in the system.

The results appear in the Search Results grid.

3. Click the name of the message to view.

Creating Message Definitions

When you add a message definition, you will specify the message type and provide a name and version.

Use the Add a New Message page (IB_MSGSEARCH_ADD) to name a new message definition and assign a version to it.

To add a new message definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.

The Messages – Search page appears.

2. Click the **Add a New Value** link.

This example illustrates the Add New Message page.

The screenshot shows a web page titled "Message Definitions" with a sub-header "Add New Message". Below the header, there are three input fields: "Type" (a dropdown menu), "Message Name" (a text box), and "Message Version" (a text box). At the bottom left, there is a dark button labeled "Add". To the right of the "Add" button is a blue link labeled "Return to Search".

<i>Field or Control</i>	<i>Description</i>
Type	Select the message type. Available types are: • Container • Document • Nonrowset • Part Nonrowset • Part Rowset • Rowset
Message Name	Enter a name for the message. The message name cannot exceed 30 characters. Do not include any spaces in the message name.
Message Version	The message version cannot exceed 30 characters. Do not include any spaces in the message version. Accepted formats for the message version include: • <i>Version_1.</i> • <i>V1.</i>

Creating Rowset Message

This section describes how to configure a Rowset message definition.

Use the Messages - Message Definition page (IB_MESSAGE_BUILDER) to configure a message after you create the message definition.

This example illustrates the Message Definition page for a Rowset-based message.

Messages

Message Definition
Schema

Message ROWSET_TEST_MESSAGE

Version V1

Description

Owner ID

Comments

Schema Exists No

☐ **Part Message**

☐ **Exclude Description in Schema**

☐ **Single Level 0 Row**

☐ **Include Namespace**

☐ **Suppress Empty XML Tags**

Message Type

☒ **Rowset-based**

☐ **Nonrowset-based**

☐ **Container**

[View Records Only](#)

[View Included Fields Only](#)

[Add Record to Root](#)

[Left](#) | [Right](#)

ROWSET_TEST_MESSAGE

Field or Control	Description
Description	(Optional) Enter a description for the message.
Owner ID	(Optional) Select the Owner ID from the drop down list. The owner ID helps to determine the application team that last made a change to the definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Comments	Optional Enter comments.
Part Message	(Optional) Select the this check box if the message will be used as a message part in a container message definition.
Exclude Description in Schema	(Optional) Select this checkbox if you don't want the description included in the schema.
Single Level 0 Row	(Optional) Select to include a single level 0 row in the XML message schema. If this box is not selected, then the system includes all level 0 rows in the message in the generated schema.
Include Namespace	(Optional) Select to include the namespace in the generated schema.

Field or Control	Description
Suppress Empty XML Tags	(Optional) Select to suppress empty XML tags in message schema of rowset-based message.

To build the rowset-based message, see [Managing Rowset-Based Messages](#).

Creating Container Messages

This section describes how to configure a Container message definition.

Use the Messages - Message Definition page (IB_MESSAGE_BUILDER) to configure a message after you create the message definition.

This example illustrates the Message Definition page for a Container message.

Messages

Message Definition

Schema

Message

QE_PARTS

Version

VERSION_1

Alias

Description

Owner ID

PeopleTools Demo

Comments

Schema Exists

Yes

☐ Part Message

Message Type

☐ Rowset-based
☐ Nonrowset-based
☒ Container

[Service Operation References](#)

[Add Parts](#)

[Container Attributes](#)

Parts

<

>

1-3 of 3

>

>|

View All

Message Name	Message Version	Sequence	Minimum Occurs	Maximum Occurs	Unbound Maximum	
QE_PART_1	VERSION_1	1	0	1	N	—
QE_PART_2	VERSION_1	2	0	1	N	—
QE_PART_3	VERSION_1	3	0	1	N	—

Field or Control	Description
Alias	(Optional) Enter the name that the external system is expecting, if different from the value in the Message Name field.

Field or Control	Description
Part Message	(Optional) Select the this check box if the message will be used as a message part in a container message definition.
Add Parts	Use the Add Parts link to add the message parts. See Adding Message Parts to Container Messages

See [Managing Container Messages](#).

Creating Nonrowset Messages

This section describes how to configure a nonrowset message definition.

Use the Messages - Message Definition page (IB_MESSAGE_BUILDER) to configure a message after you create the message definition.

This example illustrates the Message Definition page for a Nonrowset message.

Messages

Message Definition

Schema

MessageNONROWSET_MSG

Versionv1

Alias

Description

Owner ID

Comments

Schema ExistsNo

☐ Part Message

Root Element

Message Type

☐ Rowset-based

☒ Nonrowset-based

☐ Container

Field or Control	Description
Alias	(Optional) Enter the name that the external system is expecting, if different from the value in the Message Name field.
Part Message	(Optional) Select the this check box if the message will be used as a message part in a container message definition.

Field or Control	Description
Root Element	You must provide a value in this field if you are using the message in a REST-based service operation. This field value is required for proper WADL document generation.

See [Managing Nonrowset-Based Message Definitions](#).

Creating Part Rowset Messages

This section describes how to configure Part Rowset message definition.

Use the Messages - Message Definition page (IB_MESSAGE_BUILDER) to configure a message after you create the message definition.

This example illustrates the Message Definition page for a Part Rowset message.

Messages

Message Definition
Schema

Message
PART_ROWSET

Version
v1

Alias

Description

Owner ID

Comments

Schema Exists
No

☒ Part Message

☐ Message Part Default Indicator

☐ Exclude Description in Schema

☐ Suppress Empty XML Tags

Message Type

☒ Rowset-based
☐ Nonrowset-based
☐ Container

View Records Only
View Included Fields Only
Add Record to Root

Left | Right

PART_ROWSET

Field or Control	Description
Alias	(Optional) Enter the name that the external system is expecting, if different from the value in the Message Name field.
Part Message	This check box is selected, indicating this is a part message.

Field or Control	Description
Message Part Default Indicator	When you select this check box, XML that has a value of 0 (zero) is passed in as an integer field, when serialized to a rowset, causes the IsChanged property flag on the field to set to True.
Exclude Description in Schema	(Optional) Select this checkbox if you don't want the description included in the schema.
Suppress Empty XML Tags	(Optional) Select to suppress empty XML tags in message schema of rowset-based message.

To configure the message see [Managing Message Parts](#).

Creating Part Nonrowset Messages

This section describes how to configure Part Nonrowset message definition.

Use the Messages - Message Definition page (IB_MESSAGE_BUILDER) to configure a message after you create the message definition.

This example illustrates the Message Definition page for a Part Nonrowset message.

Messages

Message Definition Schema

Message
PART_NONROWSET

Version
v1

Alias

Description

Owner ID

Comments

Schema Exists
No

☒ **Part Message**

Message Type

☐ Rowset-based
 ☒ Nonrowset-based
 ☐ Container

The Part Message checkbox is selected and read only.

To configure the message see [Managing Message Parts](#).

Creating Document Message Definitions

This section discusses adding document message definitions.

Understanding Adding Document Message Definitions

When you create a document message definition in the system, you create a message definition that references a document. .


Prerequisites for Adding Document Message Definitions

Before you add a document message definition to the system, the document definition that the message will reference must exist in the system

Adding a Document Message Definition

When you add a document message definition, additional options appear on the page than when you add other message types.

This example illustrates the Add New Message page. The example shows adding a *Document* message type to the system.

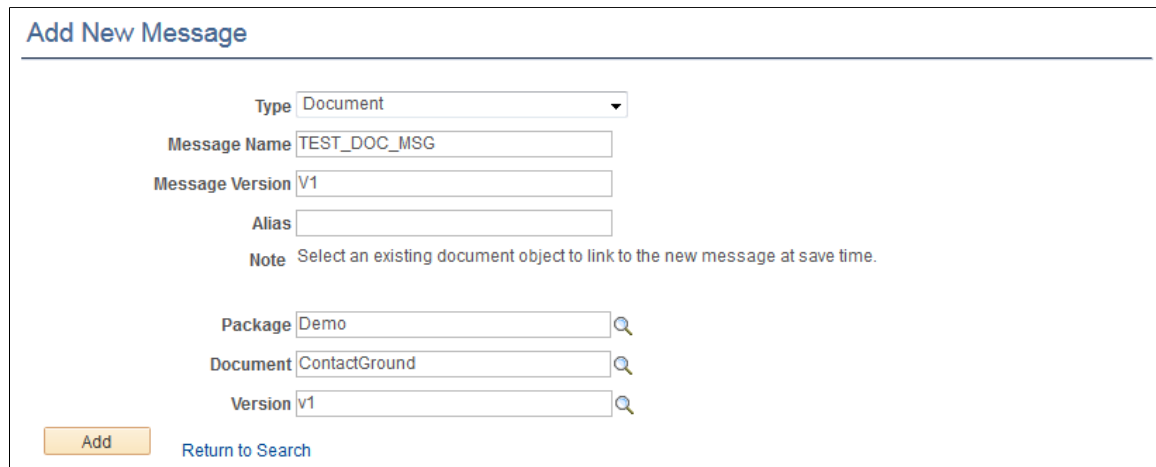

The screenshot shows the 'Add New Message' form. At the top, the title 'Add New Message' is displayed in blue. Below the title, the form contains several input fields and a note. The 'Type' field is a dropdown menu with 'Document' selected. The 'Message Name' field contains 'TEST_DOC_MSG'. The 'Message Version' field contains 'V1'. The 'Alias' field is empty. Below these fields is a note: 'Note Select an existing document object to link to the new message at save time.' Below the note, there are three more input fields: 'Package' with 'Demo', 'Document' with 'ContactGround', and 'Version' with 'V1'. Each of these three fields has a magnifying glass icon to its right. At the bottom left of the form is an orange 'Add' button. At the bottom center is a blue link labeled 'Return to Search'.

After you provide a message name, version, and optional alias, you specify the document package, document name, and version to which to link the message.

After you click the **Add** button, the document that you specified in the message definition appears in the Document Builder – Document page.

This example illustrates the Document Builder – Document page. In the example the **Metadata References** section shows that the message *TEST_DOC_MSG.v1* references the document.

The screenshot shows the Document Builder interface. At the top, there are tabs for Document, XML, Relational, JSON, and HTML. Below these, the Package is set to 'Demo', Document Name to 'ContactGround', and Version Name to 'v1'. The 'Metadata References' section is expanded, showing a table with two columns: 'Source' and 'Identifier'. The 'Source' column contains 'Integration Broker Message' and the 'Identifier' column contains 'TEST_DOC_MSG.V1'. Below this, the 'Document Details' section is expanded, showing a tree view of the document structure with 'ContactGround' as the root, and sub-elements 'Contact_name', 'Contact_Title', and 'Contact_Phone'.

The **Metadata References** section in the definition shows that there is an Integration Broker message called *TEST_DOC_MSG.v1* that references the document.

Note that the message definition is not saved until you click the **Save** button in the Document Builder.

To add a document message definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select the **Add New Value** tab.
3. From the **Type** drop-down list, select *Document*.
4. In the **Message Name** field, enter a name for the message.

The message name cannot exceed 30 characters. Do not include any spaces in the message name.

5. In the **Version** field, enter a version for the message.

The message version cannot exceed 30 characters. Do not include any spaces in the message version.

Accepted formats for the message version include:

- *Version_1.*
- *V1.*

6. (Optional) In the **Alias** field, enter the name that the external system is expecting, if different from the value in the **Message Name** field.
7. In the **Package** field, enter the document package or click the **Lookup** button to search for one.
8. In the **Document** field, enter the document name or click the **Lookup** button to search for one.
9. In the **Version** field, enter the document version or click the **Lookup** button to search for one.

10. Click the **Add** button.

The Document Builder–Document page appears, displaying the document definition for the document you specified. The Metadata References grid displays the name of the message definition you added.

11. Click the **Save** button.

Managing Rowset-Based Messages

This section provides an overview of managing rowset-based message definitions and discusses how to:

- View rowset-based message structures.
- Insert root records.
- Insert child and peer records.
- Specify record aliases.
- Delete records.
- Exclude fields from messages.
- Specify field name aliases.
- Manage XML message schemas for rowset-based messages.
- Enforce message record and field aliases in generated WSDL.

Understanding Managing Rowset-Based Messages

This section provides overview information about managing rowset-based message definitions.

Root Records

When you create a rowset-based message, you must at a minimum insert a root record (level 0) into the definition.

Records and Record Fields

You create and modify records and record fields in PeopleSoft Application Designer.

Note: Avoid using derived/work records in messages. Work records don't behave like regular records when used with PeopleCode rowset methods. A good alternative is to use dynamic views.

Record and Record Field Aliases

Record and field aliases are optional parameters that are used for schema and XML generation.

When record and field aliases are used, the receiver of a message sees the alias names instead of the actual record and field names. The alias names are seen in the message definition, in message schemas, and on generated runtime XML that is sent to the receiver.

Note that the sender still codes to the actual record and field name.

XML Schema for Rowset-Based Messages

When you create or make changes to a rowset-based message definition, the system automatically generates message schema.

Viewing Rowset-Based Message Structures

This section discusses the three ways to view the structure of rowset-based message definitions. This section discusses how to:

- View the entire structure of rowset-based message definitions.
- View only the records in rowset-based message definitions.
- View only included records fields in rowset-based message definitions.

Viewing the Entire Structure of Rowset-Based Message Definitions

By default, when you open a rowset-based message definition in the Messages – Message Definition page, PeopleSoft Integration Broker displays the complete message definition structure.

This example illustrates a partial view of the Messages – Message Definition page. The bottom portion of the page, shown here, shows the complete message definition structure for the message *QE_FLIGHTPLAN*.



The system displays the definition in a tree structure. Use the **Expand** button (+) and the **Collapse** (-) button to expand and collapse the tree to view all records, subrecords and fields (both included and excluded) in the definition.

Record fields that are included in the message definition have a check next to them. Record fields that are not included in the message definition have a box next to them. In the previous graphic, *QE_RANGE* is the only record field that is not included in the *QE_FLIGHTPLAN* message definition.

You can view the record or field properties by clicking the record or field name.

To view the entire structure of a rowset-based message:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select a message to view.

The Messages-Message Definitions page appears and the entire structure of the message appears in a tree view.

3. Expand and collapse the tree to view the message structure.

Viewing Only the Records in Rowset-Based Message Definitions

You can use the Records Only page (IB_MESSAGE_TR_SEC) to view the records and subrecords in a rowset-based message definition.

This example illustrates the Records Only page. The example shows records and subrecords for the *QE_FLIGHTPLAN* message displaying in the Records Only page.



To view only the records in a rowset-based message:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select a message to view.

The Messages-Message Definitions page appears.

3. Just above the tree structure view of the message structure, click the **View Records Only** link.


The Records Only page appears and the records and subrecords in the message definition display in a hierarchical view.

4. Click the **Return** button to return to the Messages-Message Definitions page.

Viewing Only Included Record Fields in Rowset-Based Message Definitions

You can use the Included Fields Only page (IB_MESSAGE_TR_SEC) to view the included records fields for a rowset-based message definition.

This example illustrates the Included Fields Only page. The example shows a sample of the records and their included fields contained in the *QE_FLIGHTPLAN* message definition.

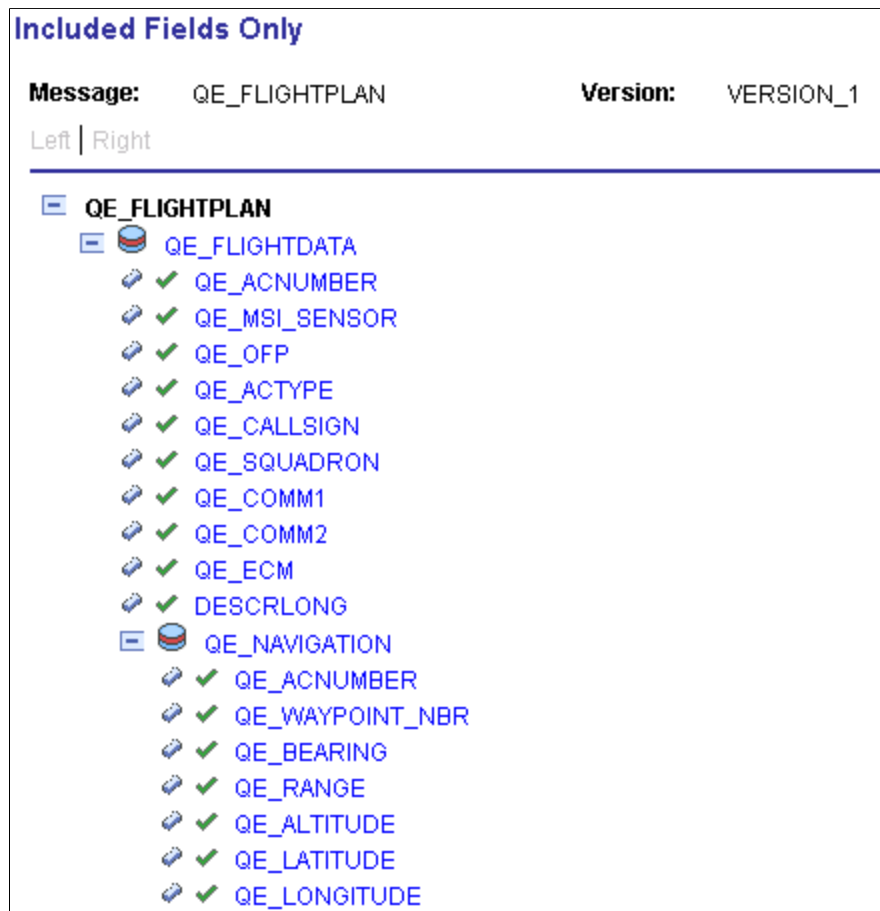

Included fields are denoted by a green icon in the shape of a check mark.

To view included record fields in a rowset-based message:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select a message to view.

The Messages–Message Definitions page appears.

3. Just above the tree structure view of the message structure, click the **View Included Fields Only** link.


The Included Fields Only page appears and included records fields contained in the message display.

4. Click the **Return** button to return to the Messages–Message Definitions page.

Inserting Root Records

You insert a root record into a rowset-based message definition using the Add New Record page (IB_MESSAGE_TOP_SEC).

This example illustrates the Add New Record page.

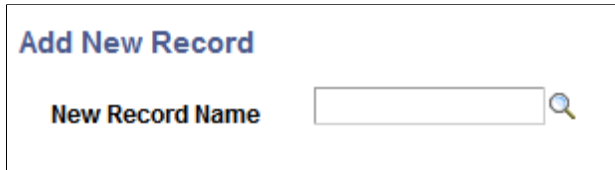

Note: There can only be one root record defined for each rowset-based message.

To insert a root record into a definition:

1. Access the Add New Record page.

Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**. The Messages-Message Definitions page appears. Click the **Add Record to Root** link.

2. In the **New Record Name** field, enter the name of the record to add, or click the **Lookup** button to search for and select one.
3. Click the **OK** button.

The root record appears in the tree structure. Click the **Expand** button (+) to expand the tree and view fields that are associated with the record.

You can exclude fields from the record and specify field name aliases. Steps for performing these actions are described elsewhere in this topic.

See [Excluding Fields from Messages](#).

See [Specifying Field Name Aliases](#).

Inserting Child and Peer Records

You insert child and peer records into a rowset-based message definition using the Message Record Properties page (IB_MESSAGE_REC_SEC).

This example illustrates the Message Record Properties page.

Message Record Properties

Record: QE_FLIGHTDATA
 Alias Name: QE_FLIGHTDATA

Action

☐ Delete Record
☐ Add Record
☐ Peer Record
☒ Child Record

New Record Name: 

Field List Customize | Find |  |  First  1-10 of 10  Last

Field Name	Include	Alias
QE_ACNUMBER	☒	
QE_MSI_SENSOR	☒	
QE_OFF	☒	
QE_ACTYPE	☒	
QE_CALLSIGN	☒	
QE_SQUADRON	☒	
QE_COMM1	☒	
QE_COMM2	☒	
QE_ECM	☒	
DESCRLONG	☒	

To insert a child or peer record into a rowset-based message definition:

- Access the Message Record Properties page.
 (Select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Message Definitions**. The Messages-Message Definitions page appears. Click the linked record name to which to add a peer or child record.)
- In the **Action** group box, select **Add Record**.
- In the **New Record Name** field, enter the name of the record to add, or click the **Lookup** button to search for and select a name.
- Select whether to add the record as a peer record or a child record.
 - Select **Peer Record** to add the record as a peer.
 - Select **Child Record** to add the record as a child.
- Click the **OK** button.

The Messages-Message Definitions page appears.

6. Click the **Save** button.

Specifying Record Aliases

You can specify aliases of the root, peer, and child records that you insert into rowset-based messages using the Message Record Properties page.

To specify a record alias:

1. Access the Message Record Properties page.
(Select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Message Definitions**. The Messages-Message Definitions page appears. Click the linked record name to which to specify an alias.)
2. In the **Alias Name** field, enter an alias name.
3. Click the **OK** button.

The Messages-Message Definitions page appears.

4. Click the **Save** button.

Related Links

[Message Aliases and Message Versions](#)

Deleting Records

This section describes how to delete records from a rowset-based message.

Note: Deleting the root record deletes all records and their associated fields that are inserted into the definition.

To delete a record:

1. Access the Message Record Properties page.
(Select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Message Definitions**. The Messages-Message Definitions page appears. Click the name of the record to delete.)
2. In the **Action** group box, select **Delete Record**.
3. Click the **OK** button.

The Messages-Message Definitions page appears.


4. Click the **Save** button.

Excluding Fields from Messages

You can exclude record fields from inclusion in a rowset-based message definition using the Message Field Properties page.

After you exclude fields from records, the tree view of the message definition on the Message Definitions page displays a red icon in the shape of box next to the excluded fields.

This example illustrates a partial view of the Message Field Properties page. The example shows that the field *QE_ACNUMBER* has been excluded from the *QE_FLIGHTDATA* record.

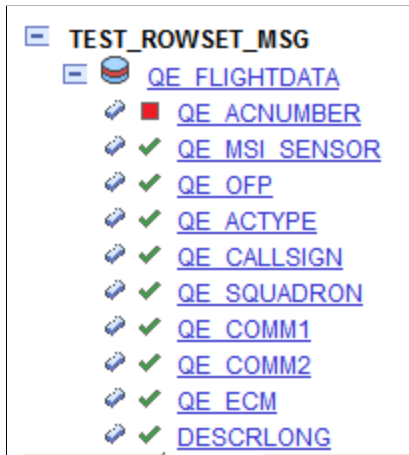

To exclude fields:

1. Access the Message Field Properties page.
 - a. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**. The Messages-Message Definitions page appears.
 - b. Click the **Expand** button (+) to expand the record tree structure, and locate the field to exclude from the definition.
 - c. Click the name of the field to exclude.

The Message Field Properties page appears.

2. Click the name of the field to exclude.
3. Deselect the **Include** check box.
4. Click the **OK** button.

The Messages-Message Definitions page appears.

5. Click the **Save** button.

Specifying Field Name Aliases

Use the Message Field Properties page to specify field name aliases.

To specify a field name alias:

1. Access the Message Field Properties page.
 - a. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**. The Messages-Message Definitions page appears.

- b. Click the **Expand** button (+) to expand the record tree structure, and locate the field to exclude from the definition.
- c. Click the name of the field for which to specify a field name alias.

The Message Field Properties page appears.

2. In the **Alias Name** field, enter an alias name.
3. Click the **OK** button.


The Messages–Message Definitions page appears.

4. Click the **Save** button.

Including Fields in CData Sections in Generated XML

You can specify that fields be included in CData sections in generated XML. When you select the **CData Wrap** check box on the Message Field Properties page, the field will be wrapped in a CData section in generated XML.

This example illustrates the Message Field Properties page

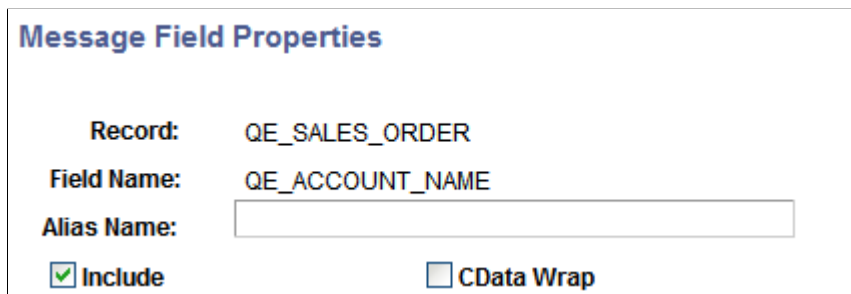

Message Field Properties

Record: QE_SALES_ORDER

Field Name: QE_ACCOUNT_NAME

Alias Name:

☒ **Include** ☐ **CData Wrap**

To include a field in a CData section in generated XML:

1. Access the Message Field Properties page.
 - a. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**. The Messages–Message Definitions page appears.
 - b. Click the **Expand** button (+) to expand the record tree structure, and locate the field to exclude from the definition.
 - c. Click the name of the field for which to specify a field name alias.

The Message Field Properties page appears.

2. Select the **CData Wrap** check box.
3. Click the **OK** button.

The Messages–Message Definitions page appears.

4. Click the **Save** button.

Managing XML Message Schemas for Rowset-Based Messages

This section discusses how to:

- View XML message schemas for rowset-based messages.
- Exclude descriptions in XML message schemas.
- Choose the number of level 0 rows to include in generated XML message schema.
- Include namespaces in generated XML message schemas.
- Suppress empty XML tags in message schema.

Viewing XML Message Schemas for Rowset-Based Messages

PeopleSoft Integration Broker automatically generates message schema for rowset-based messages when you save the message definition.

After you save a message definition on the Messages-Message Definitions page, click the **Schema** tab to view the generated XML message schema.

Excluding Descriptions in XML Message Schemas

Message data that is used to define services can have actual database record and field names in the generated XML message schema. PeopleSoft Integration Broker provides an option where you can exclude descriptions in generated message schemas so that sensitive information is not exposed.

The Messages-Message Definitions page features an **Exclude Descriptions in Schema** check box that enables you to suppress descriptions in generated schema.

To exclude descriptions in XML message schemas:

1. Access the Messages-Message Definition page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Message Definitions**).
2. Select the **Exclude Description in Schema** check box.
3. Save the changes.

See [Managing XML Message Schemas for Rowset-Based Messages](#).

Choosing the Number of Level 0 Rows to Include in Generated XML Message Schema

You can choose to include a single level 0 row in the generated schema or all level 0 rows in the generated schema.

When you select the **Single Level 0 Row** check box, PeopleSoft Integration Broker includes a single level 0 row in the XML message schema when you Save the definition. If this box is not selected, then the system includes all level 0 rows in the message in the generated schema.

By default the **Single Level 0 Row** check box is not selected.

If you check the **Single Level 0 Row** check box to generate schema with one level 0 row, the level 0 row included in the schema is the first level 0 row the system encounters in the message.

Including Namespaces in Generated XML Message Schemas

PeopleSoft Integration Broker enables you to include a namespace in XML message schemas that you generate for rowset-based messages.

When working with a rowset-based message type, the Messages–Message Definition page displays an **Include Namespace** check box. When the **Include Namespace** check box is selected, you can specify a namespace to include in the generated schema on the Messages-Schema page.

This example illustrates the Messages – Schema page. The example shows the **Namespace** field is populated with the namespace as defined in the Service Configuration page.

The screenshot shows a web interface with two tabs: "Message Definition" and "Schema". The "Schema" tab is active. Below the tabs, there are four labeled fields:

- Message:** QE_ASYNC_TEST
- Version:** VERSION_1
- Namespace:** http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_ASYNC_TEST.VER
- Schema:** (This field is empty)

By default the Namespace field is populated with the namespace defined on the Service Configuration page, however you can change the namespace to use in the message schema as required.

To include a namespace in generated schema:

1. Access the Messages–Message Definition page (**PeopleTools > Integration Broker > Integration Setup > Message Definitions**).
2. Select the **Include Namespace** check box.
3. Click the **Schema** tab.

The Messages–Schema page appears. By default the namespace as defined on the Service Configuration page populates the **Namespace** field.

4. In the **Namespace** field enter the namespace to use in the generated XML message schema.
5. Click the **Message Definition** tab.
6. Save your changes.

The system generates the message schema and includes the namespace specified.

Suppressing Empty XML Tags in Message Schema

PeopleSoft Integration Broker enables you to suppress empty XML tags in message schema of rowset-based messages.

The Messages-Message Definition page features a **Suppress Empty XML Tags** check box.

When you select this box, message schema generated for the message will not include any XML tags that contain empty or Null values.

Enforcing Message Record and Field Aliases in Generated WSDL

PeopleSoft Integration Broker enables you to enforce record and field aliases in generated WSDL.

The Service Configuration page features a **WSDL Generation Alias Check** drop-down list that enables you to set a system check level for aliases on message definition records and fields.

You can set the following check levels:

Check Level	Description
Error.	If the system encounters a message definition without proper record and field aliases, it displays an error and it will not generate a WSDL document.
None.	Default. The system creates a WSDL document regardless of whether message records and fields are aliased or not.
Warning.	As the system creates a WSDL document it displays a warning it encounters messages definitions that do not have complete aliasing for records and/or fields. If the system encounters records or fields that do not have aliases defined, you can continue to generate the WSDL document or terminate the generation of the WSDL document.

To enforce message record and field aliases in generated WSDL:

1. Access the Service Configuration page (**PeopleTools > Integration Broker > Configuration > Service Configuration**).
2. From the **WSDL Generation Alias Check** drop-down list, select a value. The valid options are:
 - *Error.*
 - *None.*
 - *Warning.*

Managing Nonrowset-Based Message Definitions

After you create a nonrowset-based message definition, you do not need to complete any additional configuration steps for the definition, however you need to supply the schema.

You may add or replace message schemas that are referenced by nonrowset-based messages in runtime tables. However, once you change a message schema for a nonrowset-based message, you must adjust the message for a successful integration.


Note: You cannot regenerate message schemas for messages that are defined as part of a restricted service.

Adding Message Schemas to Nonrowset-Based Messages

To add the schema for the nonrowset-based message:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select the nonrowset-based definition to which you want to add the schema.
3. Click the Schema tab.
4. Click the **Add Schema** button.

This example illustrates the Schema page for a nonrowset message definition.

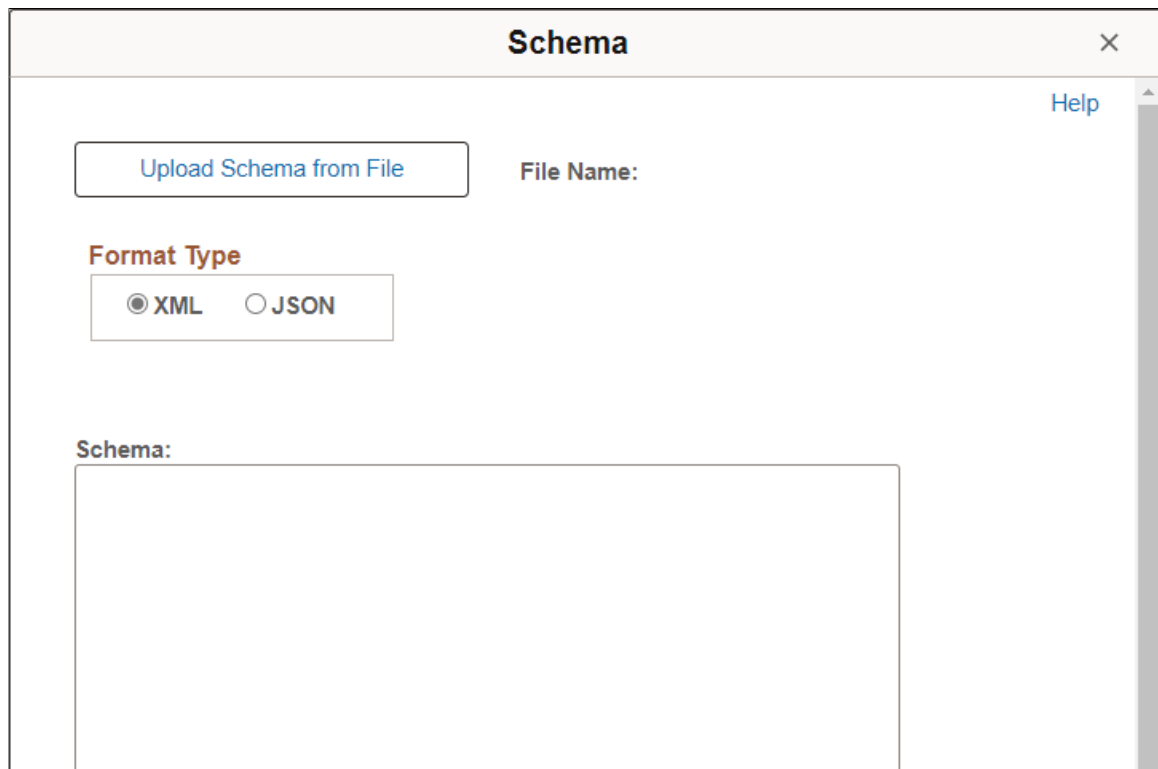

The screenshot shows a web form titled "Schema" with a close button (X) in the top right corner. Below the title bar, there is a "Help" link. The main content area contains an "Upload Schema from File" button and a "File Name:" label. Below these, there is a "Format Type" section with two radio buttons: "XML" (selected) and "JSON". At the bottom, there is a "Schema:" label followed by a large, empty text box for entering the schema.

5. Select the format type, either XML or JSON.
6. You can add the schema to the message in two ways:
 - Click the **Upload Schema From File** button to browse for and upload a schema that you have already saved to a file.
 - Enter the XML or JSON schema in the **Schema** text box that is provided.
7. Click the **Save** button.

If you define the message as a message part, you must supply a schema to save the message. All message parts require a schema at save time.

Editing Nonrowset-Based Schemas

After the message schema is added to a nonrowset-based message, you can edit the schema using the Schema page.

Note: You cannot regenerate message schemas for messages that are defined as part of a restricted service.

To edit nonrowset-based message schemas:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select the nonrowset-based definition that contains the schema that you want to edit.
3. Click the **Schema** tab.

This example illustrates the Schema page for a JSON message.

Messages

Message Definition

Schema

Message:

JSON_MSG

Updated:

06/10/2022 12:47:28PM

Version:

v1

Edit Schema

Delete Schema

Schema:

```

{
  "$schema": "http://json-schema.org/draft-06/schema#",
  "$id": "http://slc07kzl.us.oracle.com:8000/PSIGW/RESTListeningConnector/T60CD915/JSON_MSG.v1.json",
  "title": "CDF_weather",
  "type": "object",
  "properties": {
    "state": {
      "type": "string",
      "maxLength": 3
    },
    "city": {
      "type": "string",
      "maxLength": 30
    },
    "date": {
      "type": "string",
      "format": "date"
    }
  }
}

```

[Message Definition](#) | [Schema](#)

4. Click the **Edit Schema** button.

This example illustrates the Schema page open for editing.

The screenshot shows a dialog box titled "Schema" with a close button (X) in the top right corner. Inside the dialog, there is a "Help" link in the top right. Below the title bar, there is a button labeled "Upload Schema from File" and a label "File Name:". Below this, there is a section titled "Format Type" with two radio buttons: "XML" and "JSON", where "JSON" is selected. At the bottom of the dialog, there are "Save" and "Cancel" buttons. The main area of the dialog contains a text box labeled "Schema:" with the following JSON content:

```
{
  "$schema": "http://json-schema.org/draft-06/schema#",
  "$id": "http://slc07kzl.us.oracle.com:8000/PSIGW/RESTListeningConnector/T60C
D915/JSON_MSG.v1.json",
  "title": "CDF_weather",
  "type": "object",
  "properties": {
    "state": {
      "type": "string",
      "maxLength": 3
    },
  },
}
```

5. In the **Schema** text box, make your changes and additions to the schema.
6. Click the **Save** button.

Deleting Nonrowset-Based Message Schemas

You can delete individual nonrowset messages or delete schemas in bulk.

Deleting Individual Nonrowset-Based Message Schemas

Use the Messages-Schema page (IB_MESSAGE_BUILD2) to delete individual nonrowset-based XML message schema.

To delete an individual nonrowset-based message schema:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Click the **Schema** tab.
3. Click the **Delete Schema** button.

Deleting Nonrowset-Based XML Message Schemas in Bulk

To delete one or more nonrowset-based XML message schemas, use the Message Schemas page (IB_HOME_PAGE6) in the Service Administration component (IB_HOME_PAGE).

This example illustrates the Service Administration – Message Schemas page.

Integration Broker Admin

WSDL Services Service Operations Messages **Message Schemas** Queues Routings Integration Groups >

Service System Status: Development

▼ Delete

Container, part, and rowset-based message schemas cannot be deleted.

Message Name:

[Search](#)

Messages with Schemas

☐ ☐ 1-1 of 1 View All

Select	Message Name	Version	Results
☐			

[Delete](#)

To delete nonrowset-based XML message schemas in bulk:

1. Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin**.
2. Click the **Message Schemas** tab.
3. Choose the schema or schemas to delete.

To delete an individual schema, in the **Message Name** field enter the name of the message that contains the schema to delete.

To delete more than one schema, click the **Search** button to display all nonrowset-based message in the system than contain schema.

The message or messages appear in the Messages with Schema grid.

4. In the Select column, select the check box next to each message name that contain schema you want to delete.

If deleting multiple schemas, use the forward and backward arrows and/or the **Last** and **First** links to page through the results and select schemas to delete.

5. Click the **Delete** button.

Managing Message Parts

This section discusses how to create message parts.

Understanding Message Parts

Message parts are individual message definitions that get used in container messages.

While message parts can be rowset-based or nonrowset-based, the advantage of using message parts comes when working with rowset-based messages. By using nonrowset-based message parts, you cannot take advantage of PeopleSoft Integration Broker's framework for creating message definitions, use of PeopleCode, serialization, porting, and so on. The following table highlights some of the advantages of using rowset-based message parts:

Rowset-Based Message Parts	Nonrowset-Based Message Parts
You can use the PeopleSoft Pure Internet Architecture to build rowset-based message parts.	You cannot use the PeopleSoft Pure Internet Architecture to build nonrowset-based message parts.
Message schema is automatically generated for rowset-based messages.	You must generate message schema for nonrowset-based message parts.
The mapping from XML to rowset is managed by the framework.	You must use the XMLDoc class to manipulate nonrowset-based message content. In addition, you must manually map the XML into XMLDoc for the parts.

Container messages are always nonrowset-based. So, if you use a container message that contains rowset-based part messages, the container messages sends XML that contains none of the standard PeopleSoft message XML structures, such as PSCAMA, FieldTypes, and so on. However, you can use the rowset-based classes and methods to populate and read the structure of each part message.

Creating Part Messages

To create a part message, create a standard rowset-based or nonrowset-based message and select the **Part Message** check box on the Message Definition page.

When the service system status is set to *Production*, once a message is used in a container message, you cannot alter the message while it is associated with a container message.

You must generate schemas for all part messages before you can save them.

Schemas for rowset-based messages are automatically built when the message is saved. Schemas for nonrowset-based parts must be added in order to save the message.

Related Links

[Creating Message Definitions](#)

[Managing Container Messages](#)

Distinguishing Blank from Zero in Rowset-Based Part Messages

The Message Definitions page features a **Message Part Default Indicator** field that appears when you select or define a rowset-based message part.

When you select the check box, XML that has a value of *0* (zero) passed in an integer field, when serialized to a rowset, causes the `IsChanged` property flag on the field to set to *True*.

By default an integer field has a value of *0*. So if a *0* or *<blank>* is passed in a field, the end result is a *0* when accessing the field via the rowset. However, if you select the **Message Part Default Indicator** check box the `IsChanged` property on such a field is set to *True*, meaning that a *0* (zero) was passed in the field.

Reusing Rowset-Based Message Parts

This section discusses how to:

- Reuse rowset-based message parts by reference.
- Reuse rowset-based message parts by copy.

Understanding Reusing Rowset-Based Message Parts

PeopleSoft Integration Broker enables you to reuse rowset-based message parts by referencing another message part or by copying another message part.

Note: You cannot reuse message parts at Level 0.

Referencing Message Parts

A reference to a message part is read-only in the message part where it is referenced. To make changes to a referenced message part, you must make the changes to the referenced message part directly. All changes are then propagated to every message in which the message part is referenced.

Copying Message Parts

If you copy a message part, the system copies all records and fields and displays them at the record level. The records and fields become permanent to the new message and you can edit all records and fields directly in the message where the copied part exists. Changes you make to a copied message part are not propagated to other copies of the message part that may exist. You must make changes to a copied message part, you do so manually to each message part that you want to change.

Reusing Rowset-Based Message Parts by Reference

This section discusses how to:

- Reuse a message part by reference.
- Check for recursion.
- View referenced message part information.
- View where message parts are referenced.
- Modify referenced message parts.

- Delete referenced message parts.

Reusing a Message Part by Reference

To reuse a message part by reference:

1. Create a rowset-based message part.
2. Add records to the message part per your requirements. At a minimum, you must add a Level 0 record.
3. In the tree view of the message part definition, click the name of the record off of which to add the reused message part.

The Message Record Properties page appears.

4. In the **Action** box, click **Add Part Reference**.
5. Identify if the message part is a peer part reference or a child part reference.

If you are working off the Level 0 record, these fields are read only and **Child Part Reference** is selected by default.

6. In the **Reference Message Version** field, click the **Lookup** button to select the message that the system should reference.
7. Click the **OK** button.

The Messages-Message Definition page appears.

The reference part is identifiable in the tree view for the message part definition by the highlighted color on the root record of the referenced part. Since this is a reference, you can only view the reference part data structure. To make any modifications to the referenced part, you must open the message part directly and make your changes there. The system will propagate the changes to all messages that reference the message part.

Checking for Recursion

By default, the system checks up to 20 levels for recursion to ensure that no message part references itself. You can modify this setting to check for recursion in as few as three levels of records and as many as 50 levels.

This parameter is set on the System Setup Options page (IB_SYSTEMSETUP).

This example illustrates the System Setup Options page.

System Setup Options

Rowset-based message parts maximum recursion level check.

Message builder depth limit:

Enable runtime Profile information for Sync/Async processing.

☐ **IB Profile Status On**

Sync Secondary Templates ServerURL registration. By default MachineName is used.

☐ **Use IP Address**

Default SyncRequest Outbound Timeout (in seconds)

Sync Timeout:

To modify the recursion checking level:

1. Access the System Setup Options page (select **PeopleTools** > **Integration Broker** > **Configuration** > **Integration Broker Options**)
2. In the **Message Builder Depth Limit** field, enter a value between 3 and 50.
3. Click the **Save** button.

Viewing Referenced Message Part Information

A referenced message part appears highlighted in the tree structure for a message in the Messages – Message Definition page.

This example illustrates the Messages – Message Definition page. In the example the message structure for the *FLIGHTDATA* message is shown. In the tree structure the message record *QE_ARMAMENT* is highlighted and is therefore a referenced message part in the *FLIGHTDATA* message.

Message Definition

Schema

Message: FLIGHTDATA
Version: V1
Alias:
Description:
Owner ID:
Comments: PART MESSAGE

Schema Exists: Yes
☒ **Part Message**
☐ **Message Part Default Indicator**
☐ **Exclude Description in Schema**

☐ **Suppress Empty XML Tags**

Message Type
☒ **Rowset-based**
☐ **Nonrowset-based**
☐ **Container**

[Part References](#)
[View Records Only](#) [View Included Fields Only](#) [Add Record to Root](#)
 Left | Right

FLIGHTDATA

QE FLIGHTDATA - [FlightData]

QE ACNUMBER - [ACNumber]

QE MSI SENSOR - [MSISensor]

QE OFP - [OFP]

QE ACTYPE - [ACType]

QE CALLSIGN - [CallSign]

QE SQUADRON - [Squadron]

QE COMM1 - [Comm1]

QE COMM2 - [Comm2]

QE ECM - [ECM]

DESCRLONG - [Desc]

QE NAVIGATION - [Navigation]

QE RADAR PRESET - [RADARPreset]

QE ARMAMENT - [Armament]

Note: You can make changes to a message part that is referenced in another part or subpart, as long as the message part is not in the runtime tables, has not been exported as WSDL, or is a restricted message.

If you click a referenced message part, the Part Reference page (IB_MESSAGE_PARTS2) appears.

This example illustrates the Part Reference page.

Part Reference

Message Name: ARMAMENT **Message Version:** v1

Record: QE_ARMAMENT

Alias Name: [View Definition](#)

☐ **Delete Part Reference**

You can use the Part Reference page to view general information about the referenced message part as well as view the complete definition for the message part.

You can also use this page to delete the reference to the message part. Deleting a part reference is discussed elsewhere in this section.

See [Reusing Rowset-Based Message Parts](#)

To view the complete message definition for a referenced message part, on the Part References page **View Definition** link shown in the previous example. When you click the link the definition for the referenced message part appears in the Messages – Message Definition page.

This example illustrates the Messages – Message Definition page. The example shows the message definition for the Armament message part.

Message Definition **Schema**

Message: ARMAMENT **Schema Exists:** Yes

Version: v1 ☒ **Part Message**

Alias: ☐ **Message Part Default Indicator**

Description: ☐ **Exclude Description in Schema**

Owner ID: ☐ **Suppress Empty XML Tags**

Comments:

Message Type

☒ **Rowset-based**

☐ **Nonrowset-based**

☐ **Container**

[Sub-part References](#)

[View Records Only](#) [View Included Fields Only](#) [Add Record to Root](#)

Left | Right

ARMAMENT

☐ ☐ [QE_ARMAMENT - \[Armament\]](#)

You can use the page to view details about the record structure, view the generated message schema, and so on.

Modifying Referenced Message Parts

To make a modification to a referenced message part, you must make the modification in the message part definition itself. You cannot modify a referenced message part from a message in which it is referenced.

Deleting Referenced Message Parts

You delete a referenced message part in the message where the part is referenced.

To delete a referenced message part:

1. Open the message definition that contains the referenced message part to delete.
2. In the tree structure view of the message definition, click the name of the referenced message part to delete.

The Part Reference page appears.

3. Select the **Delete Part Reference** check box.
4. Click the **OK** button.

Managing Container Messages

This section provides an overview of managing container messages and discusses how to:

- Add message parts to container messages.
- Add and get container message attributes.
- Generate XML message schemas for container messages.

Understanding Managing Container Messages

Container messages are used for those situations where you want to produce XML that contains none of the standard PeopleSoft messaging XML structures, such as PSCAMA, FieldType, and so on, yet you want to use PeopleSoft rowset-based classes and methods to populate and read the message structure.

Container messages:

- Hold one or more message parts.
- Are always nonrowset-based messages.

The message parts you add to a container message must all be rowset-based message parts, or all nonrowset-based message parts.

When working with container messages that contain rowset-based message, PeopleSoft Integration Broker enables you to add attributes and attribute values to the container messages. Adding attributes to container messages enables you to provide integration partners with data and information, without the need to modify or provide the information in the container message definition or in any of the part message definitions.

Understanding Including Level 0 Rows for Message Parts in Container Messages

When you are working with a container message that holds rowset-based message parts, you can specify the minimum and the maximum number of level 0 rows for each message part.

When you are working with a container message, the Message Definition page, the Parts grid displays the following fields:

Term	Definition
Minimum Occurs	The value you enter determines the minimum number of level 0 rows in the message part to include in the container message.
Maximum Occurs	The value you enter in this field determines the maximum number of level 0 rows in the message part to include in the container message. By default the Maximum Occurs value is set to 1 to represent the single row of data on the level 0 record defined on the part (typical for component processing). However, for the case where more than one row of data is to be passed on the level 0 record, for example there is a single record defined on the message part and you want to send x number of rows of data, then increase the Maximum Occurs value to the value of x (the number of rows of data you are sending) or set the Unbounded Maximum field to Y.
Maximum Unbounded	The value you select determines if the system includes unlimited level 0 rows from the message part in the container message. The valid values are: • <i>Y</i>. The number of level 0 rows from the part message that the system includes in the container messages is unlimited, or unbound. When you select this option all rows from a part message are included in the container message. • <i>N</i>. (Default) The number of level 0 rows from the part message that the system includes in the container message is limited. You must enter the maximum number of rows from the part message to include in the container message in the Maximum Occurs field.

Example: Message XML when Maximum Occurs is Set to a Non-Default Value

The section contains an example of a container message with three message parts: *QE_PART_1*, *QE_PART_2*, and *QE_PART_3*.

Each part contains only one record (level 0 record).

As described earlier in this section, the Maximum Occurs value is 1 by default.

In the following example *QE_PART_1* is defined on the container with a Maximum Occurs value of 2 and what is actually published in this case is two rows on the level 0 record for *QE_PART_1*, as shown in the example.

```
<?xml version="1.0"?>
<QE_PARTS xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/
  QE_PARTS.VERSION_1">
  <QE_PART_1>
    <QE_NAVIGATION class="R" xmlns="http://xmlns.oracle.com/Enterprise/
      Tools/schemas/QE_PART_1.VERSION_1">
      <QE_ACNUMBER>100</QE_ACNUMBER>
      <QE_WAYPOINT_NBR>10</QE_WAYPOINT_NBR>
      <QE_BEARING/>
      <QE_RANGE/>
      <QE_ALTITUDE/>
      <QE_LATITUDE/>
      <QE_LONGITUDE/>
      <QE_HEADING/>
      <QE_VELOCITIES/>
      <QE_NAVDESC/>
    </QE_NAVIGATION>
  </QE_PART_1>
  <QE_PART_1>
    <QE_NAVIGATION class="R" xmlns="http://xmlns.oracle.com/Enterprise/
      Tools/schemas/QE_PART_1.VERSION_1">
      <QE_ACNUMBER>100</QE_ACNUMBER>
      <QE_WAYPOINT_NBR>20</QE_WAYPOINT_NBR>
      <QE_BEARING/>
      <QE_RANGE/>
      <QE_ALTITUDE/>
      <QE_LATITUDE/>
      <QE_LONGITUDE/>
      <QE_HEADING/>
      <QE_VELOCITIES/>
      <QE_NAVDESC/>
    </QE_NAVIGATION>
  </QE_PART_1>
  <QE_PART_2>
    <QE_RADAR_PRESET class="R" xmlns="http://xmlns.oracle.com/Enterprise/
      Tools/schemas/QE_PART_2.VERSION_1">
      <QE_ACNUMBER>2</QE_ACNUMBER>
      <QE_RADAR_SELECTION>1</QE_RADAR_SELECTION>
      <QE_RADARMODE>TWS</QE_RADARMODE>
      <QE_RADAR_OPERMODE>N</QE_RADAR_OPERMODE>
      <QE_BARSCAN>4B</QE_BARSCAN>
      <QE_RADARRANGE>40</QE_RADARRANGE>
      <QE_TGTAGE>8</QE_TGTAGE>
      <QE_CHANNELSET>B</QE_CHANNELSET>
      <QE_AZIMUTH>80</QE_AZIMUTH>
      <QE_PRF>H</QE_PRF>
    </QE_RADAR_PRESET>
  </QE_PART_2>
  <QE_PART_3>
    <QE_ARMAMENT class="R" xmlns="http://xmlns.oracle.com/Enterprise/Tools/
      schemas/QE_PART_3.VERSION_1">
      <QE_ACNUMBER>2</QE_ACNUMBER>
      <QE_STATION_NBR>1</QE_STATION_NBR>
      <QE_AGMODE>CCIP</QE_AGMODE>
      <QE_BIT>SBIT</QE_BIT>
      <QE_WEAPONSPESCS/>
    </QE_ARMAMENT>
  </QE_PART_3>
</QE_PARTS>
```

Adding Message Parts to Container Messages

This section discusses how to add message parts to container messages.

Use the Messages – Message Definitions page to add message parts to a container message. To access the page, select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Message Definitions**.

This example illustrates the Messages – Message Definitions page for the container message *CONTAINER_MSG*.

Message Definition | **Schema**

Message: CONTAINER_MSG

Version: V1

Alias:

Description:

Owner ID:

Comments:

Schema Exists: No

☐ **Part Message**

Message Type

☐ Rowset-based

☐ Nonrowset-based

☒ Container

[Add Parts](#)

Message Name	Message Version	Sequence	Minimum Occurs	Maximum Occurs	*Unbound Maximum
		0	0	1	N

When you click the **Add Parts** link to specify a message, version, and message type to add, the Add Parts page (IB_MESSAGE_PARTS) appears.

This example illustrates the Add Parts page.

Add Parts

Message Name:

Message Version:

☒ **Show Rowset-based Parts**

☐ **Show Nonrowset-based Parts**

For a message definition to be available for you to add to a container message, you must have selected the **Message Parts** check box when you created the message definition. In addition, container messages can contain only all rowset-based messages or all nonrowset-based messages.

After you add message parts to a container message, the Messages – Message Definitions page displays and the message parts that you have added to the message are listed in the **Parts** grid.

This example illustrates the Messages – Message Definitions page. The example shows three message parts added to the container message.

Message Definition

Schema

Message:

CONTAINER_MSG

Version:

V1

Alias:

Description:

Owner ID:

Comments:

Schema Exists:

No

☐

Part Message

Message Type

☐ Rowset-based

☐ Nonrowset-based

☒ Container

Add Parts

Container Attributes

Parts

Customize | Find | View All | 

First 1-3 of 3 Last

Message Name	Message Version	Sequence	Minimum Occurs	Maximum Occurs	*Unbound Maximum	
QE PART 1	VERSION_1	1	0	1	N	
QE PART 2	VERSION_1	2	0	1	N	
QE PART 3	VERSION_1	3	0	1	N	

Click the name of any of the message parts that appear in the grid to open the individual message definition. If the service system status is set to *Production*, when assigned to a container message, you cannot modify a message definition. To modify the definition, you must delete it from the container message first.

This example illustrates the Messages – Message Definitions page. The example shows how the *PART_1* message part displays if you click the message name in the **Parts** grid shown in the previous example.

Clicking the **Part References** link displays all messages to which the message part is assigned.

Note: Before you add nonrowset-based message parts to a container message, you must upload XML message schemas to each message part that you intend to include in the container message. Nonrowset-based part messages cannot be saved without a schema.

To add a message part to a container message:

1. Select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.
2. Select a container message to which to add message parts.

The Messages - Message Definitions page appears.

3. Click the **Add Parts** link.

The Add Parts page appears.

4. Select a message to add.

You can use one of two methods to select a message to add:

- a. In the **Message Name** and **Message Version** fields, enter the message name and version to add.
- b. Select the **Show Rowset-Based Parts** option or the **Show Nonrowset-Based Part** option and click the **Search** button to display all rowset-based or nonrowset-based messages that are designated as part messages in the system.

Select one or more messages to include in the container message.

5. Click the **OK** button.

The Messages - Message Definitions page appears, with the **Parts** grid populated with the message or messages that you selected.

6. (Optional.) In the **Parts** grid, enter numeric values in the Sequence column to order message part placement in the container message.

If you do not enter any values, the system sequences the messages in the order in which you add them to the container message.

7. (Optional.) In the Minimum Occurs field, enter the number of minimum rows in the message part to include in the container message.
8. In the Maximum Occurs field, enter the maximum number of level 0 rows from the part message to include in the container message.
9. In the Unbound Maximum drop-down list, select whether to include all level 0 rows from the part in the container message.

Note: If you select *Y*, note that the Maximum Occurs field no longer displays on the page, as all rows are included in the container message.

The Minimum Occurs, Maximum Occurs and Unbound Maximum fields are described elsewhere in this section.

See [Understanding Including Level 0 Rows for Message Parts in Container Messages](#).

Adding and Getting Container Messages Attributes

This section discusses how to:

- Add the language code of the message sender as an attribute to a container message.
- Add attribute names to a container message.
- Populate attribute values for container message attributes.
- Get attribute names and values from a container message.

This section also provides a summary of PeopleCode that you can use to populate attribute values and get attribute data from container messages.

Understanding Adding, Populating, and Getting Container Message Attributes

You can add attributes to container messages that contain rowset-based message parts to provide integration partners with data and information, without adding the information to the message definition.

To add attributes to a container message, you first define the attribute name, length, and required flag in the container message definition in the PeopleSoft Pure Internet Architecture. This information appears in generated container message schema. At runtime the attributes appear at the root level of the

generated XML. Next you use PeopleCode to populate the attribute values using the IBInfo object. At runtime, PeopleSoft Integration Broker validates the attribute values against the lengths you defined in the container message definition.

PeopleSoft provides a number of IBInfo object methods to get attributes from container messages.

Adding Language Codes of the Message Senders as Attributes to Container Messages

The language code of the user who executed the publish or sync request is a common attribute to add to a container message. As such, PeopleSoft provides an **Include Language Code** attribute box, that when selected automatically includes the information as an attribute name and value in the container message.

This example illustrates the Container Attributes page. The example shows that the **Include Language Code** check box is selected.

Container Attributes

Message Name: CONTAINER_MSG

Version: V1

☒ **Include Language Code**

*Attribute Name	Length	Required		
		☐	+	-
		☐	+	-

To add the language code of the message sender as an attribute:

1. Access the Container Attributes page (**PeopleTools > Integration Broker > Integration Setup > Message Definitions** and click the **Container Attributes** link).
2. Select the **Include Language Code** check box.
3. Click the **OK** button.
4. The Messages–Message Definitions page appears.

Adding Attribute Names to Container Messages

After you add one or more rowset-based message parts to a container message and save the message, a **Container Attributes** link appears on the Messages–Message Definition page under the **Message Type** group box. When you click the **Container Attributes** link, the Container Attributes page (IB_MESSAGE_ATT_SEC).

This example illustrates the Container Attributes page. In the example two attribute names are defined, *MessageImportance* and *DeveloperID*.

Container Attributes

Message Name: CONTAINER_MSG

Version: V1

☐ Include Language Code

*Attribute Name	Length	Required		
MessageImportance	6	☒	+	-
DeveloperID	7	☒	+	-

To add an attribute name to a container message:

1. Access the Container Attributes page (**PeopleTools > Integration Broker > Integration Setup > Message Definitions** and click the **Container Attributes** link).
2. In the **Attribute Name** field, enter a name for the attribute.
3. In the **Length** field, enter a numeric field length value.
4. (Optional.) Select the **Required** check box if you want the attribute name to be required.
5. Click the **OK** button.

The Messages–Message Definitions page appears.

Populating Attribute Values for Container Message Attributes

PeopleSoft provides several IBInfo object methods within the Message object to populate container message attributes.

Here is an example of how to populate attributes. The attribute values will be validated at runtime against the defined lengths.

```
&MSG = CreateMessage (Operation.MY_SVC_OPERATION);

&ret = &MSG.IBInfo.AddContainerAttribute("MessageImportance", "Medium");
&ret = &MSG.IBInfo.AddContainerAttribute("DeveloperID", "mdawson");
```

Additional IBInfo objects that you can use for working with container message attributes are described elsewhere in this section.

Getting Attribute Names and Values from Container Messages

PeopleSoft provides several IBInfo object methods within the Message object to Get attribute information from container messages.

Note that if you attempt to read attributes within an Integration Broker event, such as OnNotify, OnRequest, and so on, you must first Get a part rowset to load the attributes into the Message object from the XML.

The following code snippet shows one example of how to read attributes from a container message:

```
RowSet = &MSG.GetPartRowset(1);
&index = &MSG.Ibinfo.GetNumberOfContainerAttributes();

For &i = 1 To &index
    &attrName = &MSG.Ibinfo.GetContainerAttributeName(&i);
    &attrValue = &MSG.Ibinfo.GetContainerAttributeValue(&i);
End-For;
```

Additional IBInfo objects that you can use for working with container message attributes are described elsewhere in this section.

Summary of PeopleCode Use for Working With Container Message Attributes

The following table summarizes the PeopleCode methods that you can use for working with container message attributes.

Method	Description
GetNumberOfContainerAttributes Syntax: <pre>&Integer = &MSG.IBInfo.GetNumberOfContainerAttributes();</pre>	Gets the number of container attributes
GetContainerAttributeName Syntax: <pre>&String = &MSG.IBInfo.GetContainerAttributeName(Integer nIndex);</pre>	Returns the name of the container attribute based on an index.
GetContainerAttributeValue Syntax: <pre>&String = &MSG.IBInfo.GetContainerAttributeValue(Integer nIndex);</pre>	Returns the value of the container attribute based on an index.

<i>Method</i>	<i>Description</i>
AddContainerAttribute Syntax: <pre>&Bool = &MSG.IBInfo.AddContainerAttribut⇒ e(string name, string value);</pre>	Add container attributes by passing in attribute name and value.
DeleteContainerAttribute Syntax: <pre>&Bool = &MSG.IBInfo.DeleteContainerAttri⇒ bute(string name);</pre>	Delete a container attribute based on the attribute name.
ClearContainerAttributes Syntax: <pre>&MSG.IBInfo.ClearContainerAttributes();</pre>	Deletes all container attributes in the IBInfo object.

Generating XML Message Schemas for Container Messages

XML message schemas for container messages are automatically generated when you save the definition. You can view the generated XML message schema on the Messages - Schema page. To access the page, select **PeopleTools > Integration Broker > Integration Setup > Message Definitions** and click the **Schema** tab.

This example illustrates the Messages – Schema page. The example shows system-generated XML message schema for a container message with rowset-based message parts.

Message Definition		Schema
Message Name:	TEST_01	Updated: 12/13/2005 5:21:04PM
Version:	Version_1	
Name Space:	http://xmlns.oracle.com/Enterprise/Tools/schemas/CONTAINER_TE.Vers	
Schema:	<pre> <?xml version="1.0"?> <xsd:schema elementFormDefault="qualified" targetNamespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/CONTAINER_TE.Version_1" xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/CONTAINER_TE.Version_1" xmlns:FIRST_MSG_PART.Version_1="http://xmlns.oracle.com/Enterprise/Tools/schemas/FIRST_MSG_PART.Version_1" xmlns:SECOND_MSG_PART.Version_1="http://xmlns.oracle.com/Enterprise/Tools/schemas/SECOND_MSG_PART.Version_1" xmlns:THIRD_MSG_PART.Version_1="http://xmlns.oracle.com/Enterprise/Tools/schemas/THIRD_MSG_PART.Version_1" xmlns:xsd="http://www.w3.org/2001/XMLSchema"> <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/FIRST_MSG_PART.Version_1" schemaLocation="http://pho-mdawsona.peoplesoft.com/PSIGW/PeopleSoftServiceListeningConnector? Operation=GetSchema&xsd=FIRST_MSG_PART.Version_1"/> <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/SECOND_MSG_PART.Version_1" schemaLocation="http://pho-mdawsona.peoplesoft.com/PSIGW/PeopleSoftServiceListeningConnector? Operation=GetSchema&xsd=SECOND_MSG_PART.Version_1"/> <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/THIRD_MSG_PART.Version_1" schemaLocation="http://pho-mdawsona.peoplesoft.com/PSIGW/PeopleSoftServiceListeningConnector? Operation=GetSchema&xsd=THIRD_MSG_PART.Version_1"/> <xsd:element name="CONTAINER_TEST_MSG" type="CONTAINER_TEST_MSGType"/> <xsd:complexType name="CONTAINER_TEST_MSGType"> <xsd:sequence> <xsd:element maxOccurs="unbounded" minOccurs="0" name="FIRST_MSG_PART" type="FIRST_MSG_PART.Version_1:FIRST_MSG_PART_TypeShape"/> <xsd:element maxOccurs="unbounded" minOccurs="0" name="SECOND_MSG_PART" type="SECOND_MSG_PART.Version_1:SECOND_MSG_PART_TypeShape"/> <xsd:element maxOccurs="unbounded" minOccurs="0" name="THIRD_MSG_PART" type="THIRD_MSG_PART.Version_1:THIRD_MSG_PART_TypeShape"/> </xsd:sequence> </xsd:complexType> </xsd:schema> </pre>	

The namespace that is used in the XML message schema becomes by default the value that is defined on the Service Configuration page. To change the namespace, enter a the new namespace on the Schema page in the **Namespace** field, the Message Definition tab, and save the change. The XML message schema is generated again by means of the modified namespace value.

Managing Document Messages

After you add a document message to the system, you manage the document using the Document Builder and the document utilities.

Related Links

[Documents Technology](#)

Viewing Service Operations that Reference Messages

Use the Service Operation References page (IB_MESSAGE_SO_SEC) to view a list of service operations that contain a message. The Messages-Message Definitions page provides a link to this page. To access

the page, select **PeopleTools > Integration Broker > Integration Setup > Message Definitions** and click the **Service Operation References** link.

This example illustrates the Service Operation References page. The example shows a list of service operations that contain the message *IB_EX_NONROWSET_CONTAINER*.

Service Operation References

Message: IB_EX_NONROWSET_CONTAINER

Version: v1

Service Operations		
Service Operation	Service Operation Version	Validation
IB_EX_MP_NONROWSET_ASYNC	v1	☐
IB_EX_MP_NONROWSET_SYNC	v1	☐

The following page elements appear on the Service Operation References page:

<i>Field or Control</i>	<i>Description</i>
Message	Name of the message that is referenced in one or more service operations.
Version	Version of the message that is reference in one or more service operations.
Service Operation	Name of the service operation that contains the message.
Service Operation Version	Version of the service operation that contains the message.
Validation	When the check box is selected message schema has been generated for the message in the service operation.

Resolving Inconsistencies in Exported WSDL and WADL Documents

This section discusses how to:

- View service operations with exported WSDL or WADL inconsistencies.
- Clear exported WSDL/WADL status flags.

Understanding Using Project Copy and Exported WSDL and WADL

When you generate WSDL or WADL for a service operation, the system sets an internal flag on the service operation that indicates that WSDL/WADL has been generated or exported for the specific service operation.

The system uses the same repository for WSDL and WADL documents. The WSDL metadata object is used for project copy of WSDL and WADL. There is no WADL metadata object only WSDL.

You may later decide to use Project Copy to copy the service operation to a new database. But you may decide not to or simply neglect to copy the exported WSDL or WADL to the new database.

Even though you have not copied the WSDL/WADL to the new database, the internal flag that says WSDL/WADL has been generated is still set on the service operation. As a result, the system expects WSDL/WADL to exist in the new database, when it does not. When this condition exists, the system displays a status message on the message definition(s) of messages referenced in the service operation.

When this condition exists, the options are:

- Clear the internal WSDL/WADL exported flag on the service operation.

Information about how to perform this task is discussed in this section.

- Use Project Copy to copy the WSDL/WADL to the new database.

See “Copying Projects” (Lifecycle Management Guide).

- Regenerate the WSDL/WADL on the new database using the Provide Web Service wizard.

See [Providing Non-REST Web Services](#), [Providing REST Web Services](#), and [Providing OpenAPI REST Web Services](#).

Viewing Services Operations with Exported WSDL/WADL Inconsistencies

If the system detects a WSDL/WADL flag inconsistency, the following status message appears on the Messages-Message Definitions page for those message definitions referenced in the service operation for the WSDL/WADL in question:

Exported WSDL flag inconsistency detected. WSDL does not exist.

This example illustrates the Messages – Message Definitions page. The example shows the “Exported WSDL flag inconsistency detected” status message and the **Exported WSDL Inconsistency** link appearing on the page.

Message Definition

Schema

Status: Exported WSDL flag inconsistency detected. WSDL does not exist.

[Exported WSDL Inconsistency](#)

Message: FLIGHTPLAN

Schema Exists: Yes

☐ Part Message

Version: v1

Alias:

Description:

Owner ID:

Comments:

Message Type

☐ Rowset-based
 ☐ Nonrowset-based
 ☒ Container

[Service Operation References](#)

Add Parts

[Container Attributes](#)

Message Name	Message Version	Sequence	Minimum Occurs	*Unbound Maximum
FLIGHTDATA	V1	1	0	Y

In addition, an **Exported WSDL Inconsistency** link appears on the Messages-Message Definitions page. Click this link to view the Exported WSDL Inconsistencies page (IB_HOME_PAGE7_SEC).

This example illustrates the Exported WSDL Inconsistencies page

Exported WSDL Inconsistencies

Message: Service operations flagged as having exported WSDL need for that WSDL to exist in the repository. If this is not the case, the data is inconsistent. This error is caused by importing a service operation and not bringing along the related service or WSDL object via project copy.

[Service Admin](#)

Exported WSDL Inconsistent Operations

[Customize](#) | [Find](#) | [View All](#) | |

First Last

Service Operation	Service Operation Version
FLIGHTPLAN	v3

The page displays service operations that exist in the database that are flagged as having WSDL/WADL exported, yet no WSDL/WADL exists in the database for them. The Exported WSDL Inconsistencies page features a **Service Admin** link. Clicking the link opens the Service Administration-WSDL page (IB_HOME_PAGE7). The Service Administration-WSDL page provides options to clear the internal exported WSDL flag.

Clearing Exported WSDL/WADL Status Flags

The Clear WSDL Status page (IB_HOME_PAGE7_SEC) enables you to clear the internal exported WSDL/WADL status flag for service operations that contain specific messages, or for all service operations in the database.

Note: Clearing the internal exported WSDL/WADL status flag on a service operation is one way to resolve a WSDL/WADL flag inconsistency. Other options for resolving this condition are discussed elsewhere in this topic.

See [Understanding Using Project Copy and Exported WSDL and WADL](#).

This example shows the Clear WSDL Export Status page

Clear WSDL export status

Operations flagged as exported but without WSDL.

Service Operation	Version
FLIGHTPLAN	v3

Clear Export Status

Up to this point, this section has demonstrated accessing the Clear WSDL Export Status page starting from the **Export WSDL Inconsistency** link on a message definition, and then clicking on the **Service Admin** link from the Exported WSDL Inconsistencies page. When you access the page using this navigation, only the service operations that reference the message definition that you were originally viewing on the Messages – Message Definitions page appear. Further, those service operations that appear are those that are flagged as having WSDL/WADL exported, but for which there is none in the database.

You can also clear the WSDL/WADL export status flag for all service operations in the database that are in the inconsistent state of having been flagged as having WSDL/WADL generated, but no WSDL/WADL exists in the database for them. You can do so by accessing the Service Administration-WSDL page and clicking the **Clear WSDL Export Status** link.

This example illustrates the Clear WSDL Export Status page. The example shows a list of service operation in the database that have inconsistent WSDL.

Clear WSDL export status

Operations flagged as exported but without WSDL.

Service Operation	Version
GENCOMPONENTURL_SO	v1
PRCS_FINDREQUESTS	v1
PRCS_GETPARAMS	v1
PRCS_GETPROCESSNAMES	v1
PRCS_GETPROMPT	v1
PRCS_GETREPORT	v1
PRCS_GETREQUEST	v1
PRCS_SCHEDULE	v1
PRCS_UPDATEREQUEST	v1
PT_SES_CREF_GET	v1

Clear Export Status

To clear the WSDL/WADL exported status flag:

- Access the WSDL Export Status page using one of the following methods:
 - From a message definition that displays the “Exported WSDL flag inconsistency” status message: Click the **Exported WSDL Inconsistency** link. The Exported WSDL Inconsistencies page appears. Click the **Service Admin** link.
 - From the PeopleTools menu: Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin**. The Service Administration page appears. Click the **WSDL** tab. Click the **Clear WSDL Export Status** link.
- Click the **Clear Export Status** button.

Renaming and Deleting Message Definitions

You can rename and delete messages using the Messages page (IB_HOME_PAGE5) in the Services Administration component (IB_HOME_PAGE). The Message page contains two sections: a Delete section that enables you to delete message definitions and a Rename section that enables you to rename message definitions.

To access the page, select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Messages** tab.

When you first access the Messages page, all sections are collapsed. Click the section header arrow buttons to expand and collapse each section.

This example illustrates the Services Administration – Messages page. In the example the Delete and Rename sections are expanded.

Service System Status: Development

▼ Delete

Message Name:

Search

Messages

Customize | Find | View All | First 1 of 1 Last

Select	Message Name	Version	Description	Results
☐				

Delete

▼ Rename

Message Name: [Message Builder](#)

New Name:

Rename

Results:

At the top of the page, the **Service System Status** field displays the current setting. The service system status, set on the Service Configuration page, affects the ability to rename and delete messages.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

Renaming Message Definitions

To rename a message definition:

Note: Renaming a message definition renames all versions.

1. Access the Services Administration - Messages page.
Select **PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin.**
Click the **Messages** tab.
2. Click the arrow next to the Rename section header to expand the section.
3. In the **Message Name** field, enter the message definition to rename, or click the **Lookup** button to search for and select the message to rename.
4. (Optional.) Click the **Message Builder** link to view details about the selected message in the Messages - Message Definitions page.

When you are done viewing the message details, click the **Return** button to return to the Services Administration - Messages page.

5. In the **New Name** field, enter the new name for the message definition.
6. Click the **Rename** button.

Deleting Message Definitions

When you delete a message definition the system also deletes its associated schema.

To delete a message definition:

1. Access the Services Administration - Messages page.

Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin**.
Click the **Messages** tab.

2. Click the arrow next to the Delete section header to expand the section.
3. In the **Message Name** field, enter the name of the message to delete, and click the **Search** button.
Search results appear in the results grid.
4. In the results grid, select the check box next to the message or messages to delete.
5. Click the **Delete** button.

Deleting Messages During Upgrade

To delete a message definition in an application upgrade project, you must first make sure that no live instances of the message exist. Archive or delete any such messages in both the source and the target database. Otherwise, you receive an error message during the copy process indicating that the object is in use.

Chapter 7

Sending and Receiving Messages

Understanding Sending and Receiving Messages

To send and receive messages you use PeopleCode to:

- Send request messages from PeopleSoft Integration Broker to other systems.
- Receive response messages from other systems.
- Route messages.
- Manipulate message content.

You can also send messages directly to the integration gateway, thereby bypassing processing on the integration engine.

Note: The code examples in this topic are for illustrative purposes only and are not intended to be used in a production environment.

Prerequisites for Sending and Receiving Messages

Before you can define PeopleCode to generate, send, receive, and process messages, you must define the message in PeopleSoft Internet Architecture.

Note: Once you create PeopleCode, you must also define nodes, services and service operations to implement a complete integration.

See [PeopleSoft Integration Broker Metadata](#).

Messaging Process Flows

The integration engine uses asynchronous request processes and synchronous request processes to manage outbound and inbound messages. These processes examine the messaging elements that you create to determine how to treat each message.

Outbound Message Processing Flow

This section discusses message processing flow for outbound messages. In this section, the term process is used, and refers to either the integration engine's asynchronous request process or its synchronous request process, depending on the type of integration you are performing.

Outbound messages you send go through the following steps.

1. The application triggers the sending PeopleCode that you developed.

2. The PeopleCode program populates and sends the message by using an asynchronous or synchronous method.
3. The method that the PeopleCode uses to send the message triggers a request process in the application's integration engine.
4. The process searches the outbound routings that are associated with that service operation to determine the valid target nodes for the message.

The asynchronous process examines only asynchronous routings, and the synchronous process examines only synchronous routings. If for synchronous processing, a valid single outbound routing cannot be found, the sending method returns an error.

Note: Only active routings are considered for processing.

5. For each outbound routing that it finds, the process submits the message to the local gateway, along with transaction information about the node and the target connector that should be used to send the message.
6. The local gateway transmits the message to the specified target node through the specified target connector.
7. If this is a synchronous message, the process waits for the target node to pass a response message back through the gateway, then returns it to the calling PeopleCode method.

Inbound Message Processing Flow

Each received message goes through the following steps:

1. The application's gateway receives a request message from a remote node or gateway, which specifies the application as its target node.
2. The gateway submits the message to the application's integration engine, which searches for any inbound request routing parameter which has the same alias name as the external operation name passed in.
3. If a matching routing alias name isn't found, the integration engine returns an error message through the gateway to the sending node.

If a routing alias name is found, the integration engine invokes either the asynchronous request process or the synchronous request process, as appropriate, to handle the message.

Note: Any inbound routing alias that is found must have the proper permissions for that service operation for the process to proceed.

4. The process accesses the service operation that matches the routing alias name and passes the message to the service operation's handler associated with receiving PeopleCode.
 - The asynchronous request process invokes the service operation's handler OnNotify event PeopleCode.
 - The synchronous request process invokes the service operation's handler OnRequest event PeopleCode.

5. If this is a synchronous transaction, the process waits for the receiving PeopleCode to generate and return a response message, then passes it back to the sending node through the gateway.

Understanding Integration PeopleCode

This section discusses the PeopleCode used for integrations and describes:

- Sending and receiving PeopleCode.
- Integration application classes.
- Integration methods.
- Messaging methods.
- Error-handling methods.
- Messaging PeopleCode.
- Documents PeopleCode.

Sending and Receiving PeopleCode

This section discusses the PeopleCode you use for sending messages from PeopleSoft Integration Broker to other systems, and the PeopleCode you use for receiving messages from other systems.

Sending PeopleCode

PeopleCode for sending messages can be located in PeopleCode events associated with records, record fields, and components, and in application engine programs.

The PeopleCode method used to send messages is highlighted in the following table.

<i>Transmission Type</i>	<i>Sending PeopleCode</i>	<i>Comments</i>
Synchronous	SyncRequest method.	The SyncRequest method belongs to the IntBroker class.
Asynchronous	Publish method.	The Publish method belongs to the IntBroker class.

To work with rowset-based messages in SOAP format, transform the SOAP documents into XML documents and then use the IntBroker class SyncRequest or Publish methods. To work with nonrowset-based messages in SOAP format use the SOAPDoc class.

Receiving PeopleCode

The PeopleCode that you use to receive a message must be associated with the message definition. The transmission type of the message determines the location of the PeopleCode program.

Implement the `OnRequest` method for synchronous messages. Implement the `OnNotify` method for asynchronous messages. Both methods are located in the `PS_PT` application package, in the `Integration` sub-package, in the `IRequestHandler` and `INotificationHandler` classes, respectively.

Transmission Type	Message Structure	Receiving PeopleCode	Comments
Synchronous	Rowset-based	Message is passed into the method.	Implement the <code>OnRequest</code> method in the <code>IRequestHandler</code> application interface.
Synchronous	Nonrowset-based	Message is passed into the method.	Implement the <code>OnRequest</code> method in the <code>IRequestHandler</code> application interface.
Asynchronous	Rowset-based	Message is passed into the method.	Implement the <code>OnNotify</code> method in the <code>INotificationHandler</code> application interface.
Asynchronous	Nonrowset-based	Message is passed into the method.	Implement the <code>OnNotify</code> method in the <code>INotificationHandler</code> application interface.

To get content data out of a request message, use the following guidelines.

Message Structure	PeopleCode	Comments
Rowset-based	<code>GetRowSet</code> method.	None.
Nonrowset-based	<code>GetXMLDoc</code> method.	You can also use <code>Message</code> class functionality with nonrowset-based messages. See Using Message Object Functionality With Nonrowset-Based Messages .

Application Classes

Application classes house the processing logic for asynchronous and synchronous messages. By implementing the `Integration Broker` application classes, you can reuse code and access other benefits of application classes.

The following application classes exist for PeopleSoft Integration Broker. See the individual applicable application class interfaces for more information about the methods contained in an application class.

To access these application classes, in PeopleSoft Application Designer, open the PS_PT application package and open the Integration subpackage.

Note: All of the Integration Broker application classes are defined as interfaces. This means that there is no native implementation of them: you must import them to your program and implement them if you want to use them.

<i>Application Class</i>	<i>Methods Contained in Application Class</i>	<i>Comments</i>
INotificationHandler	- OnNotify - OnError	This interface is the equivalent of the Subscription Message event PeopleTools releases prior to PeopleTools 8.48.
IReceiver	- OnAckReceive - OnError	This interface is the equivalent of the OnAckReceive Message event in PeopleTools releases prior to PeopleTools 8.48.
IRequestHandler	- OnRequest - OnError	This interface is the equivalent of the OnRequest Message event in PeopleTools releases prior to PeopleTools 8.48.
IRouter	- OnRouteSend - OnRouteReceive - OnError	This interface is the equivalent of the OnRouteSend and OnRouteReceive Message events in PeopleTools releases prior to PeopleTools 8.48.
ISend	- OnRequestSend - OnError	This interface is the equivalent of the OnSend Message event in PeopleTools releases prior to PeopleTools 8.48.

Each of the methods contained in these application classes is described in this section.

Routing Methods

Routing methods determine how a message is routed to or from PeopleSoft Integration Broker.

OnRouteSend Method

Implement the OnRouteSend method for outbound synchronous and asynchronous service operations to specify to what node PeopleSoft Integration Broker routes a message. The implementation of this method enables you to apply PeopleCode that filters the destination nodes to which PeopleSoft Integration Broker routes messages.

The `OnRouteSend` method is contained in the `IRouter` application class, which is contained in the `PS_PT` application package, in the `Integration` subpackage.

When the application `PeopleCode` is invoked to send a message, the routing definitions in the local database provide a list of target nodes to which PeopleSoft Integration Broker can route the message. The integration engine's request handler invokes the service operation's `OnRouteSend` event. You can implement the `OnRouteSend` method in the application package associated with the handler for this service operation, which enables you to apply additional `PeopleCode` that determines the final target nodes.

You can use `OnRouteSend` to validate the outbound service operation's target node list, prevent the message from transmitting, or redirect it to a completely different set of targets.

The following table lists the `PeopleCode` built-in constants that you can use with the `OnRouteSend` method:

<i>Constant</i>	<i>Description</i>
<code>%IntBroker_ROUTE_NONE</code>	Do not send this operation to any of the possible nodes.
<code>%IntBroker_ROUTE_SOME</code>	Send this operation to a selected list of nodes. The node list should be an array of strings in the property <code>destinationNodes</code> .
<code>%IntBroker_ROUTE_ALL</code>	Send this operation to all nodes that have a valid routing.

`OnRouteSend` enables you to account for multiple synchronous targets. Only one target node at a time can receive a request message sent with a synchronous transaction. Even though you can define the same outbound synchronous transaction for multiple nodes, you must make sure the transaction resolves to a single target node or the transaction fails.

The following code example shows an implementation of this class:

```
import PS_PT:Integration:IRouter;

class RoutingHandler implements PS_PT:Integration:IRouter
    method RoutingHandler();
    property array of any destinationNodes;
    method OnRouteSend(&_MSG As Message) Returns integer;
end-class;

/* constructor */
method RoutingHandler
end-method;

method OnRouteSend
    /* & MSG as Message */
    /* Returns Integer */
    /* Extends/implements PS_PT:Integration:IRouter.OnRouteSend */
    /* Variable Declaration */
    Local any &aNodeList;
    Local any &rootNode;
    Local any &xmlDoc;

    /* Check the message for the instructions on how to execute
       the OnRouteSend.*/

    &xmlDoc = &_MSG.GetXmlDoc();
```

```

&rootNode = &xmlDoc.DocumentElement;
&aNodeList = &rootNode.GetElementsByTagName("OnRouteSend");

If (&aNodeList.Len <> 1) Then

    /* No Nodes are in the list, therefore exit. */
    Exit;
Else

    /* check the value of the node to determine the action to
       take. */

    Evaluate &aNodeList [1].NodeValue
    When "True"
        Return (%IntBroker_ROUTE_ALL);
        Break;
    When "False"
        Return (%IntBroker_ROUTE_NONE);
        Break;
    When-Other

        /* assume that this is to be routed to the node given */
        Local array &nodeArray;
        &nodeArray = CreateArray();
        &nodeArray.Push(&aNodeList [1].NodeValue);

        Local string &sIBVariableTest = GetCurrentType(&nodeArray);
        Evaluate &sIBVariableTest
        When "Array"
            &destinationNodes = &nodeArray.Clone();
            Return %IntBroker_ROUTE_SOME;
        When "BooleanTrue"
            Return %IntBroker_ROUTE_ALL;
        When "BooleanFalse"
            Return %IntBroker_ROUTE_NONE;
        End-Evaluate;
        Break;

    End-Evaluate;

End-If;

end-method;

```

OnRouteReceive Method

Implement the OnRouteReceive method for inbound synchronous and asynchronous service operations to apply PeopleCode that determines whether the default local node accepts inbound messages.

The OnRouteReceive method is contained in the IRouter application class, which is contained in the PS_PT application package, in the Integration subpackage.

When the integration engine receives a message, the transaction definitions in the local database provide a list of source nodes from which the application can accept the message. The integration engine's request handler invokes the service operation's OnRouteReceive event. You can implement the OnRouteReceive method in the application package associated with the handler for this service operation, which enables you to apply PeopleCode that determines whether the default local node accepts the inbound message. You can employ this event regardless of the message transmission type.

The following is an example implementation of this method:

```

import PS_PT:Integration:IRouter;

class RoutingHandler implements PS_PT:Integration:IRouter
    method RoutingHandler();
    property array of any destinationNodes;

```

```

        method OnRouteReceive(&_MSG As Message) Returns boolean;
    end-class;

/* constructor */
method RoutingHandler
end-method;

method OnRouteReceive
    /* &_MSG as Message */
    /* Returns Boolean */
    /* Extends/implements PS_PT:Integration:IRouter.OnRouteReceive */
    /* Variable Declaration */
    Local any &aNodeList;
    Local any &rootNode;
    Local any &xmlDoc;

    /* Check the message for instructions on how to execute
       the OnRouteReceive.*/

    &xmlDoc = &_MSG.GetXmlDoc();
    &rootNode = &xmlDoc.DocumentElement;
    &aNodeList = &rootNode.GetElementsByTagName("OnRouteReceive");

    If (&aNodeList.Len <> 1) Then

        /* A single node must be present. */
        Exit;
    Else

        /* check the value of the node to determine the action to
           take. */

        Evaluate &aNodeList [1].NodeValue
        When "True"
            Return ( True);
            Break;
        When "False"
            Return ( False);
            Break;
        When-Other
            /* don't recognize the value. */
            Exit;
        End-Evaluate;

    End-If;

end-method;

```

Messaging Methods

This section describes methods used in messaging and the application classes in which they are contained.

Outbound Messaging Methods

This section describes methods used on outbound messages from PeopleSoft to other systems.

Term	Definition
OnRequestSend	Implement for outbound synchronous and asynchronous service operations to override connector properties before sending a message to the integration gateway. This method is contained in the ISend application class. The OnRequestSend method passes in a message to your derived application class method. The returned value needs to be a message. The following is an example implementation of this method. <pre> import PS_PT:Integration:ISend; class SendHandler implements PS_PT:Integration:ISend method SendHandler(); method OnRequestSend(&_MSG As Message)) Returns Message; end-class; /* constructor */ method SendHandler end-method; method OnRequestSend /* &_MSG as Message */ /* Returns Message */ /* Extends/implements PS_PT:Integration:ISend */ on:ISend. +/ /* OnRequest Send */ /* Variable Declaration */ Local any &tempNode; Local any &rootNode; Local any &xmlDoc; Local any &msg; &msg = &_MSG; &xmlDoc = &msg.GetXmlDoc(); /* Add a node to the doc to prove that we can edit it in this event. */ &rootNode = &xmlDoc.DocumentElement; &tempNode = &rootNode.AddElement("OnSend"); &tempNode.NodeValue = "If you see this, then the Sync OnSend PCode has altered the message"; </pre>

Term	Definition
	<pre> /* and write the data back into the message */ &msg.SetXmlDoc (&xmlDoc); Return (&msg); end-method; </pre> See Setting and Overriding Target Connector Properties at Runtime. When using the ISend handler with message parts, specifically with rowset-based message parts, the rowsets of the parts must be retrieved <i>in the order</i> that the content data will be sent. The following is an example that can be used for ISend events that use rowset-based parts (even for the cases where one is just overriding the connectors): <pre> method OnRequestSend /* &MSG as Message */ /* Returns Message */ /* Extends/implements PS_PT:Integration */ on:ISend. /* /* OnRequestSend */ If (&MSG.IsPartsStructured) Then Local number &i; Local Rowset &rs; For &i = 1 To &MSG.PartCount &rs = &MSG.GetPartRowset (&i); End-For; End-If; Return &MSG; end-method; </pre>

Term	Definition
OnAckReceive	Implement for outbound asynchronous service operations to access the body of a message acknowledgement to check for SOAP faults. This method is contained in the IReceiver application class. The following is an example implementation of this method. <pre> import PS_PT:Integration:IReceiver; class AckReceiveHandler implements PS_PT⇒ : Integration:IReceiver method AckReceiveHandler(); method OnAckReceive(&_MSG As Message)⇒ Returns integer; end-class; /* constructor */ method AckReceiveHandler end-method; method OnAckReceive /* &_MSG as Message */ /* Returns Integer */ /* Extends/implements PS_PT:Integrati⇒ on:+/ /* IReceiver.OnAck Receive */ /* Variable Declaration */ /* /* We return a hardcoded value. In this ⇒ case, a message error.*/ Return (%Operation_Error); end-method; </pre> See Handling Inbound Asynchronous Transactions.

Inbound Messaging Methods

This section describes methods used on inbound messages to PeopleSoft from other systems.

Term	Definition
OnRequest	Implement for inbound synchronous service operations. This method is contained in the IRequestHandler application class. The following is an example implementation of this method: <pre> class RequestHandler implements PS_PT:In⇒ tegration: IRequestHandler method RequestHandler(); method OnRequest(&_MSG As Message) Re⇒ turns Message; end-class; /* constructor */ method RequestHandler end-method; method OnRequest /* &_MSG as Message */ /* Returns Message */ /* Extends/implements PS_PT:Integrati⇒ on: */ /* IRequestHandler.OnRequest */ /* Variable Declaration */ Local any &tempNode; Local any &descNode; Local any &rootNode; Local any &xmlDoc; Local any &xmldata; Local any &msg; &msg = CreateMessage(Operation.QE_IB_⇒ SYNC_RESP,%IntBroker_response); &xmldata = "<?xml version='1.0'?> <QE_IB_PeopleCode_Test>/>"; &xmlDoc = CreateXmlDoc(&xmldata); &rootNode = &xmlDoc.documentelement; &descNode = &rootNode.AddElement("Des⇒ cription"); &descNode.NodeValue = "Sync test of O⇒ nRouteSend."; &tempNode = &rootNode.addelement("OnR⇒ equest"); &tempNode.NodeValue = "If you see thi⇒ s, then the On Request PCode created the⇒ response </pre>

Term	Definition
	<pre> message"; &msg.SetXmlDoc (&xmlDoc); Return &msg; </pre>
OnNotify	Implement for inbound asynchronous service operations. This method can be used for code that does subscription processing, and for validating and loading message data. This method is contained in the INotificationHandler application class. The following is an example implementation of this method: <pre> import PS_PT:Integration:INotificationHa⇒ ndler; class NotificationHandler implements PS_⇒ PT:Integration: INotificationHandler method NotificationHandler(); method OnNotify(&_MSG As Message); end-class; /* constructor */ method NotificationHandler end-method; method OnNotify /* &_MSG as Message */ /* Extends/implements PS_PT:Integrati⇒ on: */ /* INotificationHandler.OnNotify */ /* Variable Declaration */ Local Rowset &rs; &rs = &MSG.GetRowset(); /* process data from rowset */ end-method; </pre>

Term	Definition
OnResponse	Implement for inbound response asynchronous service operations. This method can be used for code that does response subscription processing. This method is contained in the INotificationHandler application class. The following is an example implementation of this method and shows how to get the request TransactionID. <pre> import PS_PT:Integration:INotificationHa ndler; class RESPONSE_NOTIFICATION implements P S_PT: Integration:INotificationHandler method RESPONSE_NOTIFICATION(); method OnNotify(&MSG As Message); end-class; /* constructor */ method RESPONSE_NOTIFICATION %Super = create PS_PT:Integration:INo tificationHandler(); end-method; method OnNotify /* &MSG as Message */ /* Extends/implements PS_PT:Integrati on:*/ /* INotification Handler.OnNotify */ Local Rowset &rs; Local boolean &Ret; Local string &TransactionID; &rs = &MSG.GetRowset(); If &MSG.IsSourceNodeExternal Then /* if the request came from an ext ernal non PeopleSoft System then you can g et the original TransactionID from the WSA_MessageID from the request message. */ &TransactionID = &MSG.IBInfo.WSA_M essageID; Else /* if the request came from a Peop </pre>

Term	Definition
	<pre> leSoft System then get the original Tr⇒ ansactionID from the nReplyToID */ &TransactionID = &MSG.IBInfo.InRep⇒ lyToID; End-If; end-method;</pre>

Error-Handling Methods

Each application class contained in the Integration application subpackage contains an `OnError` method that you can use for custom error handling.

Custom error handling can include sending an email notification or entering data in a log when an error occurs.

For the `IRequestHandler` application class, the `OnError` function returns a string. This enables you to send back custom error messages, for example SOAP faults, to non-PeopleSoft consumers. If the message consumed was a SOAP message and the custom error message is already wrapped in SOAP, it will not be modified and is sent as-is. However, if the `OnError` message is not SOAP, it is wrapped as a standard SOAP fault and returned to the sender.

If the message consumer is another PeopleSoft system the message set/message ID framework applies.

If an error occurs the `OnError` method, if implemented, is automatically invoked. The type of exception can be viewed by using the Message object to retrieve an Exception object populated with information about the error, using the message class `IBException` property.

The following is an example of the `OnError` method implementation:

```

/*On Error Implementation */
method OnError
    /*+ &MSG as Message +/
    /*+ Returns String +/
    /*+ Extends/implements PS_PT:Integration:IRequestHandler.OnError +/
    Local integer &nMsgNumber, &nMsgSetNumber;
    Local string &sText;

    &nMsgNumber = &MSG.IBException.MessageNumber;
    &nMsgSetNumber = &MSG.IBException.MessageSetNumber;
    rem    &sText = &exception.DefaultText;
    &sText = &MSG.IBException.ToString();

    /* ADD SPECIFIC ERROR INFO HERE */
    Return &sText;

end-method;
```

See “Understanding Exception Class” (PeopleCode API Reference).

See “IBException” (PeopleCode API Reference).

Messaging PeopleCode

Messaging PeopleCode enables you to manipulate message content. The messaging PeopleCode classes you can use for this are:

Term	Definition
Message classes	Use for rowset or nonrowset-based messages.
SOAPDoc class	Use for SOAP-compliant messages.
XMLDoc classes	Use for XML messages.
Document class	Use for Document type messages.

XML and SOAP-compliant messages are nonrowset-based messages. You can use their respective classes to manipulate message content, or use the Message classes.

Related Links

[Using Message Object Functionality With Nonrowset-Based Messages](#)

“Understanding XmlDoc Classes” (PeopleCode API Reference)

“Understanding theSOAPDoc Class” (PeopleCode API Reference)

“Understanding Message Classes” (PeopleCode API Reference)

Document PeopleCode

PeopleSoft provides a Document API for populating and retrieving document data that includes several built-in functions and classes.

The built-in functions are:

Term	Definition
CreateDocument	Use this built-in function to instantiate a Document object.
CreateDocumentKey	Use this built-in function to instantiate a Document Key object

The classes are:

- Document class.

Use the methods and properties in this class to populate and retrieve document data.

- DocumentKey class.

Use the methods and properties in this class to create document keys.

Document keys enable you to map the document package, document name, and document version, to one string. As a result, when you populate or retrieve data from a document, you can specify the one document key, instead of specifying the document package, name, and version.

populating or retrieving data from a document, you can use the one document key

- Primitive class.

Use the methods and properties in this class to populate and retrieve document data from primitive elements.

- Compound class.

Use the methods and properties in this class to populate and retrieve document data from compound elements.

- Collection class.

Use the methods and properties in this class to populate and retrieve document data from collection elements.

The Document API is discussed in the product documentation for [PeopleCode API Reference](#).

Examples of populating and retrieving document data are provided elsewhere in this topic.

Generating and Sending Messages

This section provides an overview of outbound messaging and discusses how to:

- Handle outbound asynchronous message transmission.
- Handle outbound asynchronous request/response message transmission.
- Handle outbound synchronous message transmission.
- Read exceptions for outbound synchronous integrations.
- Handle cookies in messages.

Understanding Outbound Messaging

Successful outbound messaging relies on sending messages in the proper order and on testing the messages. Messages containing non-XML data have special considerations.

Message Order

PeopleSoft Integration Broker guarantees that messages are delivered in the order in which you send them and that they are single-threaded at the PeopleSoft receiving node. However, message order is not part of the queue definition. You must send messages in the proper order.

Note: You can modify this behavior by using queue partitioning.

See [Applying Queue Partitioning](#).

Message Testing

Make sure that you adequately unit-test and system-test your messages.

Unit-test a message by triggering the PeopleCode that sends the message and then view the message details in Service Operations Monitor. From the Service Operations Monitor, you can view the contents of each field to verify that the message data is formatted correctly.

See the product documentation for [Integration Broker Service Operations Monitor](#).

You can also test handler code using the Handler Tester utility. See the product documentation for [Integration Broker Testing Utilities and Tools](#) for more information.

Message Class Outbound PeopleCode

Use the record class `SelectByKey` method whenever possible to get data that isn't in the component buffer.

If the record names are the same, use the standard record methods, such as `SelectByKey`, `Insert`, and `Update`, on the message records.

There are no automatic checks for message size. You must do it programmatically. Use the following code at level 0 to control message size when dealing with multiple transactions:

```
If &Msg.Size > %MaxMessageSize
```

Note: The `OnRouteSend` method enables you to apply PeopleCode that filters the destination nodes.

See “Understanding Record Class” (PeopleCode API Reference).

Non-XML Data

If you're generating a non-XML outbound message, it's up to you to insert the message content into a special XML section containing a CDATA tag:

```
<xml psnonxml="yes">  
  <![CDATA[nonXML_message_data]]>
```

Outbound Messaging and Global Variables

When you invoke a `SyncRequest` method the system clears any declared global variables after `OnRouteSend` or `OnSend` PeopleCode events are fired. If a component attempts to access any of the global variables after the `SyncRequest` method, a context error occurs.

`OnRouteSend` and `OnSend` events are primarily used for asynchronous messaging, however they can be use for synchronous messages.

To avoid context errors when using `OnRouteSend` or `OnSend` events for synchronous messaging, following these guidelines:

1. Do not use global variables.

2. If you must use global variables, save them as temporary variables prior to executing a SyncRequest event, then after the event is fired re-assign them back to the globals.
3. Run OnRouteSend or OnSend logic prior to the SyncRequest and after the node is obtained use sender-specific routing. In sender-specific routing you pass the node as part of the SyncRequest call. This will send the request to the node as long as there is an active routing. Any connector overrides can be performed prior to the SyncRequest call and set on the message.

Handling Outbound Asynchronous Message Transmission

To send a message asynchronously, use the IntBroker class Publish method in:

- A record field PeopleCode event.
- A component PeopleCode event.

When publishing from a component, publish messages only from the SavePostChange event, using the deferred mode property.

- An Application Engine program.
- An implementation of the OnNotify method.
- An implementation of the OnRequest method .

The OnRequest service operation event is triggered only when an inbound transaction occurs. However, when the receiving PeopleCode runs, the program can also send messages.

Message Class Outbound Asynchronous Example

The following example uses the Publish method in the PeopleCode IntBroker class:

```
Local Message &MSG;
Local Rowset &SALES_ORDER, &RS;

/*Get a pointer to the component buffer rowset */
&SALES_ORDER = GetLevel0();
/*Create an instance of the SALES_ORDER_ASYNC message object */
&MSG = CreateMessage(OPERATION.SALES_ORDER_ASYNC);

/*Copy the rows from the rowset to the message object */
&MSG.CopyRowset(&SALES_ORDER);
/*Send the message */
%IntBroker.Publish(&MSG);
```

XmlDoc Class Outbound Asynchronous Example

The following example uses the Publish method:

```
Local XmlDoc &xmlRequestDoc;
Local Message &MSG;

/*Create an XmlDoc Object */
&xmlRequestDoc = CreateXmlDoc();

/* Parse a URL or input XML file into an XmlDoc */

&bool = &xmlRequestDoc.ParseXmlFrom URL("C:\pt\appserv\files\
input.xml");
```

```

/* Populate message with XML data */
&MSG = CreateMessage (OPERATION.XmlRequest);

&MSG.SetXmlDoc (&xmlRequestDoc);

/* Sent request */

%IntBroker.Publish (&MSG);

```

Identifying SOAP Faults

You can implement the OnAckReceive method to access IBInfo data. This enables you to read the content of acknowledgements returned by recipient systems of asynchronous SOAP messages. The ability to access acknowledgement content is useful when sending SOAP messages, since although there may be no HTTP protocol errors while sending them, SOAP faults may occur.

If the message is nonrowset-based, use the message class GetXmlDoc method to get the response data. This returns an XmlDocument object.

If the message is rowset-based, use the message class GenXMLString method to get the response data. This returns a string object which you can load into an XmlDocument object.

If SOAP faults are found, you can set the status equal to Error so that the errors appear in the Service Operations Monitor for the publication contract.

The following code example shows how to use GetXmlDoc and GenXMLString in an implementation of the OnAckReceive method. Valid status overrides are %Operation_Done, %Operation_Error, and %Operation_Retry:

```

import PS_PT:Integration:IReceiver;

class AckReceiveHandler implements PS_PT:Integration:IReceiver
  method AckReceiveHandler();
  method OnAckReceive(&_MSG As Message) Returns integer;
end-class;

/* constructor */
method AckReceiveHandler
end-method;

method OnAckReceive
  /*+ &_MSG as Message */
  /*+ Returns Integer */
  /*+ Extends/implements PS_PT:Integration:IReceiver.OnAckReceive */
  /* Variable Declaration */

  If &MSG.IsStructure Then

    /* if message is rowset-based */
    &str = &MSG.GenXMLString();

  Else
    /* if message is nonrowset-based */
    &xmldoc = &MSG.GetXmlDoc();

  End-If;

  Return (%Operation_Done);

end-method;

```

You can also implement the OnAckReceive method to read response content data returned from third-party systems when using the HTTP target connector.

Related Links

“Understanding XmlDocument Classes” (PeopleCode API Reference)

Handling Outbound Asynchronous Request/Response Message Transmission

To transmit an outbound asynchronous request/response message, send the message asynchronously using the Publish method.

See [Handling Outbound Asynchronous Message Transmission](#).

Handling Outbound Synchronous Transactions

Use the IntBroker class SyncRequest method for handling outbound synchronous transfers. To send a message synchronously, you can employ SyncRequest in:

- The record field SavePreChange PeopleCode event.
- The record field SavePostChange PeopleCode event.
- The record field Workflow PeopleCode event.
- The record field FieldChange PeopleCode event.
- An implementation of the OnRequest method.
- An implementation of the OnNotify method.

Note: The OnRequest and OnNotify events are triggered only when an inbound transaction occurs, however, when the receiving PeopleCode runs, it can also send messages.

The response message that is returned from an outbound synchronous transaction is no different from an inbound request message. Once you have it in a Message, XmlDocument, or SoapDoc object, it has the same properties as any other object of that type and can, therefore, be treated exactly the same way.

See [Receiving and Processing Messages](#).

Message Class Outbound Synchronous Example 1

The following example uses the IntBroker class SyncRequest method:

```
Local Message &MSG, &response;
Local Rowset &SALES_ORDER;

&SALES_ORDER = GetLevel0();
&MSG = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&MSG.CopyRowsetDelta(&SALES_ORDER);

/* send the synchronous request; the return value is the response
message object */
&response = %IntBroker.SyncRequest(&MSG);

/* check the response status; 0 means OK */
If (&response.ResponseStatus = 0) Then
    /* process the response */
    MY SALES_ORDER_SYNC.ORDER ID = &response.GetRowset().GetRow(1)
    .GetRecord(Record.SO_RESPONSE).GetField(Field.ORDER_ID).Value;
```

```

else

    /* do error handling */

End-If;

```

Message Class Outbound Synchronous Example 2

The following example shows the use of CopyTo to get the data back from the response and into the component buffer, and therefore the page:

```

Local Message &msgZipRequest, &msgZipResponse;
Local Rowset &RS, &rsMessageRowset;

&RS = GetLevel0();
&msgZipRequest = CreateMessage(OPERATION.ZIP_REQUEST);
&msgZipRequest.CopyRowset(&RS);
/* send the synchronous request; the return value is the response
message object */

&msgZipResponse = %IntBroker.SyncRequest(&msgZipRequest,
Node.ZIPTOCITYANDSTATE);

/* check the response status; 0 means OK */
If (&msgZipResponse.ResponseStatus = 0) Then
    /* process the response */
    &rsMessageRowset = &msgZipResponse.GetRowset();
    &rsMessageRowset.CopyTo(&RS);
else
    /* do error handling */
End-If;

```

XmlDoc Class Outbound Synchronous Example

The following example uses the IntBroker class SyncRequest method:

```

Local Message &MSG, &RESP_MSG;
Local XmlDoc &flightplan_xmldoc, &xmldocReturn;
Local XmlNode &ac_number, &msi_sensor, &ofp;

&flightplan_xmldoc = CreateXmlDoc("");

&ac_number = &flightplan_xmldoc.CreateDocumentElement("flightplan");

&msi_sensor = &ac_number.AddElement("msi_sensor");
&msi_sensor.NodeValue = "flir";
&ofp = &ac_number.AddElement("ofp");
&ofp.NodeValue = "8.44";

&MSG = CreateMessage(Message.SYNC_REQUEST_EXAMPLE);

&MSG.SetXmlDoc(&flightplan_xmldoc);

&RESP_MSG = &MSG.SyncRequest();

&xmldocReturn = &RESP_MSG.GetXmlDoc();

&return_data = &xmldocReturn.GenXmlString();

```

Related Links

“Understanding XmlDoc Classes” (PeopleCode API Reference)

Reading Exceptions for Outbound Synchronous Integrations

The Routing – Routings Definition page features a **User Exception** check box that enables you to capture Integration Broker exceptions for outbound synchronous integrations using PeopleCode.

Note: Do not use Try/Catch PeopleCode to attempt to read exceptions on outbound SyncRequest calls.

The following code example shows how to read captured exceptions:

```
&Return_MSG = %IntBroker.SyncRequest(&MSG);
If &Return_MSG.ResponseStatus = %IB_Status_Success Then

/* process the response message */
&RS = &MSG.GetPartRowset();

Else

/* evaluate the error and either throw a PeopleCode exception or continue processing */
&error_string = &Return_MSG.IBException.ToString();
&nErrorMsgNumber = &Return_MSG.IBException.MessageNumber;
&nErrorMsgSetNumber = &Return_MSG.IBException.MessageSetNumber;

End-If;
```

Related Links

[Defining General Routing Information](#)

Overriding Synchronous Timeout Intervals at Runtime

For long-running outbound synchronous transactions, you can override the default timeout period the transaction at runtime using the SyncServiceTimeout property. The default synchronous timeout period is five minutes.

The HTTP header file is modified to take this parameter. The value you set is sent to the integration gateway where it is used for the HTTP timeout.

The SyncServiceTimeout property takes a time (in seconds). The property is read-write.

The following code example shows how to use the property. To use this property, note that you must override and setup the target connector properties for the transaction. As the example demonstrates, there are helper methods that load properties based on node or transaction.

```
&MSG.SetXmlDoc(&xmlReq);
&MSG.IBInfo.LoadConnectorPropFromNode(Node.EAI);
&MSG.IBInfo.SyncServiceTimeout = 360000;
&MSG.IBInfo.ConnectorOverride = True;
&MSG_Resp = %IntBroker.SyncRequest(&MSG, Node.EAI);
&xmlResponseDoc = &MSG_Resp.GetXmlDoc();
```

Related Links

[Setting and Overriding Target Connector Properties at Runtime](#)

Handling Cookies

PeopleSoft Integration Broker provides basic cookie handling for exchanges that are initiated by your PeopleSoft application. You can accept a synchronous response message containing cookies, save those cookies in a global variable, and later return them to the remote node in an outbound synchronous or asynchronous request message. This is a typical application of cookies in a web interaction.

Cookies are implemented as an IBInfo class property, Cookies. You can access this property only in an inbound synchronous response message or an outbound request message.

Receiving Cookies Example

The following example retains the cookies from a response message to a global variable:

```
Local Message &SalesRequest, &SalesResponse;
Local Rowset &SALES_ORDER;
Global string &SalesCookies;

&SALES_ORDER = GetLevel0();
&SalesRequest = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);

/* Send the synchronous request; the return value is the response
message object */
&SalesResponse = %IntBroker.SyncRequest(&SalesRequest);

/* Retrieve cookies from the response message */
&SalesCookies = &SalesResponse.IBInfo.IBConnectorInfo.Cookies;
```

Returning Cookies Example

The following example retrieves the previously retained cookies from the global variable and inserts them into a new request message:

```
Local Message &SalesRequest, &SalesResponse;
Local Rowset &SALES_ORDER;
Global string &SalesCookies;

&SALES_ORDER = GetLevel0();
&SalesRequest = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);

/* Insert the cookies in the request message */
&SalesRequest.IBInfo.IBConnectorInfo.Cookies = &SalesCookies;

/* Send the asynchronous request */
%IntBroker.Publish(&SalesRequest);
```

Setting and Overriding Target Connector Properties at Runtime

PeopleSoft Integration Broker enables you to dynamically override target connector properties at runtime that have previously been set at the node, connector and transaction levels. To set or override target connectors at runtime, use the PeopleCode IBInfo object, the Connector Info object and implement the OnRequestSend method.

Note: Properties set at the PeopleCode level take precedence over those set at the node, connector and routing level.

Field or Control	Description
IBInfo object	An IBInfo object is instantiated from a message object. You can use this object in publishing or synchronous request PeopleCode. You can also use it in your implementation of the OnRequestSend method.
ConnectorInfo object	A ConnectorInfo object is instantiated from an IBInfo object. Use this object for reading and writing connector name/value pair information to and from the IBRequest. You can use this object in publishing or synchronous request PeopleCode. You can also use it in your implementation of the OnRequestSend method.
OnRequestSend Method	The OnRequestSend method is included in the ISend application class. Use your implementation of this method to override target connector properties at runtime for a subscribing node transaction. This event associated with the service operation executes before any transformations are processed. You can use this event for asynchronous and synchronous messages.

Since data is always carried with the message, you can use the IBInfo object, ConnectorInfo object and your implementation of the OnRequestSend method to populate connector information in the publishing PeopleCode and then override it for a specific node.

Setting and Overriding Target Connector Properties Using the OnRequestSend Method

You can use implement the OnRequestSend method to override IBInfo and connector properties at runtime for a subscribing node transaction.

Any content data that is changed on the message or XMLDoc is sent to the subscribing node or used within a transformation.

To override the properties of a target connector, you must set the following statement to *true*:

```
&MSG.IBInfo.ConnectorOverride=true
```

If a publication contract fails as a result of using an implementation of the OnRequestSend method to override connector properties at runtime, correct the PeopleCode in your implementation and resubmit the message.

Example: Setting Target Connector Properties Using the OnRequestSend Method

The following example shows loading all connectors that exist for the node and adding one additional property, FileName.

```
import PS_PT:Integration:ISend;
```

```

class SendHandler implements PS_PT:Integration:ISend
    method SendHandler();
    method OnRequestSend(&Msg As Message) Returns Message;
end-class;

/* constructor */
method SendHandler
end-method;

method OnRequestSend
    /* &MSG as Message */
    /* Returns Message */
    /* Extends/implements PS_PT:Integration:ISend.OnRequestSend */
    /* Variable Declaration */
    Local Any &Bo;
    Local Message &Msg;

    &Bo = &MSG.IBInfo.LoadConnectorPropFromNode("nodename");

    &Bo = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties
        ("FileName", "temp", %Property);
    &MSG.IBInfo.ConnectorOverride = True;

    Return (&Msg);

end-method;

```

Example: Overriding Connector Properties Using the OnRequestSend Method

The following example demonstrates overriding target connector properties using an implementation of the OnRequestSend method for a rowset-based asynchronous message.

```

import PS_PT:Integration:ISend;

class SendHandler implements PS_PT:Integration:ISend
    method SendHandler();
    method OnRequestSend(&Msg As Message) Returns Message;
end-class;

/* constructor */
method SendHandler
end-method;

method OnRequestSend
    /* &MSG as Message */
    /* Returns Message */
    /* Extends/implements PS_PT:Integration:ISend.OnRequestSend */
    /* Variable Declaration */
    Local Boolean &bRet;

    &bRet= &MSG.IBInfo.LoadConnectorProp("FILEOUTPUT");
    &MSG.IBInfo.ConnectorOverride = True;
    &bRet= &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties
        ("sendUncompressed", "Y", %Header);
    &bRet= &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties
        ("FilePath", "c:\temp", %Property);

    Return (&Msg);

End-Method;

```

The following example demonstrates overriding target connector properties using an implementation of the OnRequestSend method for a nonrowset-based asynchronous message.

```

import PS_PT:Integration:ISend;

class SendHandler implements PS_PT:Integration:ISend

```

```

        method SendHandler();
        method OnRequestSend(&Msg As Message) Returns Message;
end-class;

/* constructor */
method SendHandler
end-method;

method OnRequestSend
    /+ &MSG as Message +/
    /+ Returns Message +/
    /+ Extends/implements PS_PT:Integration:ISend.OnRequestSend +/
    /* Variable Declaration */

    Local XmlDoc &xmldoc;
    Local Boolean &bRet;

    // if you have to access the content data for content based
    // decisions, do this
    &xmldoc = &MSG.GetXmlDoc();

    &bRet= &MSG.IBInfo.LoadConnectorProp("FILEOUTPUT");
    &MSG.IBInfo.ConnectorOverride = True;
    &bRet= &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties
        ("sendUncompressed", "Y", %Header);
    &bRet= &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties
        ("FilePath", "c:\temp", %Property);

    Return (&MSG);

End-Method;

```

Related Links

“IBInfo Class” (PeopleCode API Reference)

“IBConnectorInfo Collection” (PeopleCode API Reference)

“Understanding Message Classes” (PeopleCode API Reference)

Receiving and Processing Messages

This section discusses how to:

- Handle inbound asynchronous transactions.
- Handle inbound asynchronous request/response transactions.
- Handle inbound synchronous transactions.
- Simulate receiving messages from external nodes.

Note: The OnRouteReceive method can be implemented to apply PeopleCode that determines whether the default local node accepts the inbound message.

Handling Inbound Asynchronous Transactions

Implement the OnNotify method in the PS_PT application package, in the Integration sub-package, to handle inbound asynchronous transactions. All the examples in this section are assumed to be implementations of the OnNotify method.

Message Class Inbound Asynchronous Example 1

The following example implements the OnNotify method.

```
import PS_PT:Integration:INotificationHandler;

class FLIGHTPROFILE implements PS_PT:Integration:INotificationHandler
  method FLIGHTPROFILE();
  method OnNotify(&_MSG As Message);
end-class;

/* constructor */
method FLIGHTPROFILE
end-method;

method OnNotify
  /* &_MSG as Message */
  /* Extends/implements PS_PT:Integration:INotificationHandler.*/
  /* OnNotify */
  /* Variable Declaration */
  Local any &outstring;
  Local any &i;
  Local any &CRLF;

  Local Message &MSG;
  Local Rowset &rs, &rs1;
  Local Record &FLIGHTDATA, &REC;

  Local string &acnumber_value, &msi_sensor_value, &ofp_value,
  &actype_value, &callsign_value, &squadron_value, &comm1_value,
  &comm2_value, &ecm_value;

  Local XmlDoc &xmldoc;
  Local string &return_string_value;
  Local boolean &return_bool_value;

  &CRLF = Char(13) | Char(10);

  &MSG = &_MSG;

  &rs = &MSG.GetRowset();
  &REC = &rs(1).QE_FLIGHTDATA;

  &FLIGHTDATA = CreateRecord(Record.QE_FLIGHTDATA);
  &REC.CopyFieldsTo(&FLIGHTDATA);

  /* Parse out Message Data */
  &acnumber_value = &FLIGHTDATA.QE_ACNUMBER.Value;
  &msi_sensor_value = &FLIGHTDATA.QE_MSI_SENSOR.Value;
  &ofp_value = &FLIGHTDATA.QE_OFP.Value;
  &actype_value = &FLIGHTDATA.QE_ACTYPE.Value;
  &callsign_value = &FLIGHTDATA.QE_CALLSIGN.Value;
  &squadron_value = &FLIGHTDATA.QE_SQUADRON.Value;
  &comm1_value = &FLIGHTDATA.QE_COMM1.Value;
  &comm2_value = &FLIGHTDATA.QE_COMM2.Value;
  &ecm_value = &FLIGHTDATA.QE_ECM.Value;

  &outstring = "Send Async FLight test";

  /* Construct Output String */
  &outstring = &outstring | &acnumber_value | &CRLF |
  &msi_sensor_value |
  &CRLF | &ofp_value | &CRLF | &actype_value | &CRLF |
  &callsign_value |
  &CRLF | &squadron_value | &CRLF | &comm1_value | &CRLF |
  &comm2_value |
  &CRLF | &ecm_value;

  /* Log Output String into page record */
  &FLIGHTDATA.GetField(Field.DESCRLONG).Value = &outstring;
```



```

SQLExec("DELETE FROM PS_QE_FLIGHTDATA");
&FLIGHTDATA.Insert();

end-method;

```

Message Class Inbound Asynchronous Example 2

The following example shows notification PeopleCode that checks the PSCAMA to determine the audit action code and that examines the language code to determine whether related language processing is needed:

```

method OnNotify
    /+ &MSG as Message +/

    /* Simple PeopleCode Notification- - Check the PSCAMA*/
    Local Rowset &MSG_RS;
    Local Record &REC_NAME_PREFIX, &REC, &REC_RL;
    Local integer &I;
    Local string &ACTION, &LNG, &BASE_LNG, &RELLNG, &KEY1, &KEY2;

    &MSG_RS = &MSG.GetRowset();
    For &I = 1 To &MSG_RS.RowCount /* Loop through all transactions */
        &REC = &MSG_RS.GetRow(&I).GetRecord(Record.NAME_PREFIX_TBL);
        /* Get Audit Action for this transaction */
        &ACTION = &MSG_RS.GetRow(&I).PSCAMA.AUDIT_ACTN.Value;
        /* Get Language code for this transaction */
        &LNG = &MSG_RS.GetRow(&I).PSCAMA.LANGUAGE_CD.Value;
        &BASE_LNG = %Language;

        Evaluate &ACTION /***** Add a Record *****/
        /***** Add a Record *****/
        /***** Using record objects *****/

        When "A"
            /* Add the base language record */
            &REC_NAME_PREFIX = CreateRecord(Record.NAME_PREFIX_TBL);
            &REC.CopyFieldsTo(&REC_NAME_PREFIX);
            &REC_NAME_PREFIX.ExecuteEdits();
            If &REC_NAME_PREFIX.IsEditError Then
                /* error handling */

            Else
                &REC_NAME_PREFIX.Insert();
                /* Need error handling here if insert fails */
                If &LNG <> %Language Then
                    /* add related language record */
                    &RELLNG = &REC.RelLangRecName;
                    &REC_RL = CreateRecord(Record.NAME_PREFIX_LNG);
                    &REC.CopyFieldsTo(&REC_RL);
                    &REC_RL.LANGUAGE_CD.Value = &LNG;
                    &REC_RL.Insert();

                    /* Need error handling here if insert fails */
                End-If;
            End-If;

        /***** Change a Record *****/
        /***** Using record objects *****/

        When "C"
            /* Get the Record - insert it */
            &KEY1 = &REC.GetField(Field.NAME_PREFIX).Value;
            &REC_NAME_PREFIX = CreateRecord(Record.NAME_PREFIX_TBL);

            &REC_NAME_PREFIX.NAME_PREFIX.Value = &REC.GetField(Field.
NAME_PREFIX).Value;

```

```

    If &REC_NAME_PREFIX.SelectByKey() Then

        &REC.CopyFieldsTo(&REC_NAME_PREFIX);
        &REC_NAME_PREFIX.ExecuteEdits();
        If &REC_NAME_PREFIX.IsEditError Then
            /* error handling */
        Else
            &REC_NAME_PREFIX.Update();
        End-If;
    Else
        &REC.CopyFieldsTo(&REC_NAME_PREFIX);
        &REC_NAME_PREFIX.ExecuteEdits();
        If &REC_NAME_PREFIX.IsEditError Then
            /* error handling */
        Else
            &REC_NAME_PREFIX.Insert();
        End-If;
    End-If;

    /***** Delete a Record *****/
    /***** Using SQLExec *****/

    When "D"
        /* Get the Record using SQLExec- error */
        &KEY1 = &REC.GetField(Field.NAME_PREFIX).Value;
        SQLExec("Select NAME_PREFIX from PS_NAME_PREFIX_TBL where
NAME_PREFIX = :1", &KEY1, &KEY2);
        If None(&KEY2) Then
            /* Send to error log */
        Else
            SQLExec("Delete from PS_NAME_PREFIX_TBL where
NAME_PREFIX = :1", &KEY1);

            SQLExec("Delete from PS_NAME_PREFIX_LNG where
NAME_PREFIX = :1", &KEY1);
        End-If;
    End-Evaluate;
End-For;

end-method;

```

Message Class Inbound Asynchronous Example 3

There's a practical limit to how large a message can be, and this can be controlled by a system-wide variable called `%MaxMessageSize`. The system administrator can change this size in the `PSOPTIONS` settings. This size can be set only for all messages, not for individual definitions.

PeopleCode that populates a Message object should include code that is similar to the following example to check the message size before inserting a new Level 0 row.

Note: Always code the `%MaxMessageSize` checkpoint at the Level 0 record. A batch of transactions can be split across multiple messages, but *do not* split a single transaction (logical unit of work) into multiple messages.

```

Local SQL &hdr_sql, &ln_sql;
Local Message &MSG;
Local Rowset &hdr_rs, &ln_rs;
Local Record &hdr_rec, &ln_rec, &hdr_rec_msg, &ln_rec_msg;

/* This PeopleCode will publish messages for a simple Header/
Line record combination. Multiple Header/Lines are copied to the
message until the %MaxMessageSize is exceeded at which point a
new message is built. This references MSR_HDR_INV (Header) and
DEMAND_INF_INV (Line) records */

```

```

/* Create an instance of the STOCK REQUEST message */
&MSG = CreateMessage(OPERATION.STOCK_REQUEST);

/* Create an App. Message Rowset that includes the
MSR_HDR_INV (Header) and DEMAND_INF_INV (Line)*/
&hdr_rs = &MSG.GetRowset();

/* Create a SQL object to select the Header rows */
&hdr_sql = CreateSQL("Select * from PS_MSR_HDR_INV
                     WHERE BUSINESS_UNIT='M04A1'
                     AND ORDER_NO LIKE 'Z%' ORDER BY BUSINESS_UNIT,ORDER_NO");
&I = 1;

/* Create record objects for the Header and Lines */
&ln_rec = CreateRecord(Record.DEMAND_INF_INV);
&hdr_rec = CreateRecord(Record.MSR_HDR_INV);

/* Loop through each Header row that is fetched */
While &hdr_sql.Fetch(&hdr_rec)
/* Publish the message if its size exceeds the MaxMessageSize
/* specified in Utilities/Use/PeopleTools Options */
If &MSG.Size > %MaxMessageSize Then
    %IntBroker.Publish(&MSG);
    &I = 1;
    /* Create a new instance of the message object */
    &MSG = CreateMessage(OPERATION.STOCK_REQUEST);
    &hdr_rs = &MSG.GetRowset();
End-If;
If &I > 1 Then
    &hdr_rs.InsertRow(&I - 1);
End-If;
/* Instantiate the row within the Header portion of the
App Message rowset to which data will be copied */
&hdr_rec_msg = &hdr_rs.GetRow(&I).GetRecord(Record.MSR_HDR_INV);
/* Copy data into the level 0 (Header portion) of
/* &MSG message structure */
&hdr_rec.CopyFieldsTo(&hdr_rec_msg);

/* Publish the last message if it has been changed*/
If &hdr_rec_msg.IsChanged Then
    %IntBroker.Publish(&MSG);
End-If;
End-While;

```

Message Class Inbound Asynchronous Example 4

The following code example shows how to get data out of the IBInfo object for a rowset-based message.

```

Local Rowset &rs, &rs1;
Local Record &FLIGHTDATA, &REC;

Local string &acnumber_value, &msi_sensor_value, &ofp_value,
&actype_value, &callsign_value, &squadron_value, &comm1_value,
&comm2_value, &ecm_value, &datetime;
Local XmlDoc &xmldoc;
Local string &data;
Local boolean &return_bool_value;

&CRLF = Char(13) | Char(10);

/* this is how one would access data from IBInfo and
/* IBConnectorInfo objects*/
&return_bool_value = &MSG.IBInfo.ConnectorOverride;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfConnector
Properties()

    &data = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgName(&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgValue(&i);

```

```

End-For;

&MSG.IBInfo.IBConnectorInfo.ClearConnectorProperties();

&data = &MSG.IBInfo.IBConnectorInfo.ConnectorName;
&data = &MSG.IBInfo.IBConnectorInfo.ConnectorClassName;
&data = &MSG.IBInfo.IBConnectorInfo.RemoteFrameworkURL;
&data = &MSG.IBInfo.IBConnectorInfo.PathInfo;
&data = &MSG.IBInfo.IBConnectorInfo.Cookies;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfQueryStringArgs()

    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesName(&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesValue
        (&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesType(&i);

End-For;

&MSG.IBInfo.IBConnectorInfo.ClearQueryStringArgs();

&data = &MSG.IBInfo.MessageType;
&data = &MSG.IBInfo.RequestingNodeName;
&data = &MSG.IBInfo.OrigUser;
&data = &MSG.IBInfo.OrigNode;
&data = &MSG.IBInfo.AppServerDomain;
&data = &MSG.IBInfo.OrigProcess;
&data = &MSG.IBInfo.OrigTimeStamp;
&data = &MSG.IBInfo.DestinationNode;
&data = &MSG.IBInfo.FinalDestinationNode;
&data = &MSG.IBInfo.SourceNode;
&data = &MSG.IBInfo.MessageName;
&data = &MSG.IBInfo.MessageVersion;
&data = &MSG.IBInfo.VisitedNodes;

/* get the content data from the message rowset*/
&rs = &MSG.GetRowset();
&REC = &rs(1).QE_FLIGHTDATA;

&FLIGHTDATA = CreateRecord(Record.QE_FLIGHTDATA);
&REC.CopyFieldsTo(&FLIGHTDATA);

/* Parse out Message Data */
&acnumber_value = &FLIGHTDATA.QE_ACNUMBER.Value;
&msi_sensor_value = &FLIGHTDATA.QE_MSI_SENSOR.Value;
&ofp_value = &FLIGHTDATA.QE_OFP.Value;
&actype_value = &FLIGHTDATA.QE_ACTYPE.Value;
&callsign_value = &FLIGHTDATA.QE_CALLSIGN.Value;
&squadron_value = &FLIGHTDATA.QE_SQUADRON.Value;
&comm1_value = &FLIGHTDATA.QE_COMM1.Value;
&comm2_value = &FLIGHTDATA.QE_COMM2.Value;
&ecm_value = &FLIGHTDATA.QE_ECM.Value;
&datetime = &FLIGHTDATA.ACTIONDTM.Value;

&outstring = "Send Async Flight test";

/* Construct Output String */
&outstring = &outstring | &acnumber_value | &CRLF | &msi_sensor_value
    | &CRLF | &ofp_value | &CRLF | &actype_value | &CRLF
    | &callsign_value | &CRLF | &squadron_value | &CRLF
    | &comm1_value | &CRLF | &comm2_value | &CRLF | &ecm_value |
    &datetime;

/* Log Output String into page record */
&FLIGHTDATA.GetField(Field.DESCRLONG).Value = &outstring;

SQLExec("DELETE FROM PS_QE_FLIGHTDATA");
&FLIGHTDATA.Insert();

```

Message Class Inbound Asynchronous Example 5

The following code example shows how to get data out of the IBInfo object for a nonrowset-based message.

```

Local XmlDoc &xmldoc;
Local XmlNode &node, &root, &acct_id_node, &acct_name_node,
    &address_node, &phone_node;
Local string &outstring, &CRLF;
Local Record &FLIGHT_DATA_INFO, &REC;

Local string &data;
Local boolean &return_bool_value;

/* this is how one would access data from IBInfo and
/* IBConnectorInfo objects*/

&return_bool_value = &MSG.IBInfo.ConnectorOverride;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfConnector
    Properties()

    &data = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgName(&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetQueryStringArgValue(&i);

End-For;

&MSG.IBInfo.IBConnectorInfo.ClearConnectorProperties();

&data = &MSG.IBInfo.IBConnectorInfo.ConnectorName;
&data = &MSG.IBInfo.IBConnectorInfo.ConnectorClassName;
&data = &MSG.IBInfo.IBConnectorInfo.RemoteFrameworkURL;
&data = &MSG.IBInfo.IBConnectorInfo.PathInfo;
&data = &MSG.IBInfo.IBConnectorInfo.Cookies;

For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfQueryStringArgs()

    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesName(&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesValue
        (&i);
    &data = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesType(&i);

End-For;

&MSG.IBInfo.IBConnectorInfo.ClearQueryStringArgs();

&data = &MSG.IBInfo.MessageType;
&data = &MSG.IBInfo.RequestingNodeName;
&data = &MSG.IBInfo.OrigUser;
&data = &MSG.IBInfo.OrigNode;
&data = &MSG.IBInfo.AppServerDomain;
&data = &MSG.IBInfo.OrigProcess;
&data = &MSG.IBInfo.OrigTimeStamp;
&data = &MSG.IBInfo.DestinationNode;
&data = &MSG.IBInfo.FinalDestinationNode;
&data = &MSG.IBInfo.SourceNode;
&data = &MSG.IBInfo.MessageName;
&data = &MSG.IBInfo.MessageVersion;
&data = &MSG.IBInfo.VisitedNodes;

&xmldoc = &MSG.GetXmlDoc();

&CRLF = Char(13) | Char(10);

&root = &xmldoc.DocumentElement;

/* Get values out of XmlDocument */
&node_array = &root.GetElementsByTagName("actype");
&acct_type_node = &node_array.Get(1);

```

```

&ac_type_value = &ac_type_node.NodeValue;

&node_array = &root.GetElementsByTagName("msi_sensor");
&msi_sensor_node = &node_array.Get(1);
&msi_sensor_value = &msi_sensor_node.NodeValue;

&node_array = &root.GetElementsByTagName("callsign");
&callsign_node = &node_array.Get(1);
&callsign_value = &callsign_node.NodeValue;

&node_array = &root.GetElementsByTagName("ofp");
&ofp_node = &node_array.Get(1);
&ofp_value = &ofp_node.NodeValue;

&outstring = "GetDataout of xmldoc Test";

&outstring = &outstring | &CRLF | &ac_type_value | &CRLF |
&msi_sensor_node
    | &CRLF | &callsign_value | &CRLF | &ofp_value;

/* Write out the result string */
SQLExec("DELETE FROM PS_QE_FLIGHT_DATA");
&FLIGHT_DATA_INFO = CreateRecord(Record.QE_FLIGHT_DATA);
&FLIGHT_DATA_INFO.GetField(Field.DESCRLONG).Value = &outstring;
&FLIGHT_DATA_INFO.Insert();

```

Message Class Inbound Asynchronous Example 6

The following example show a notification that could be an implementation of the OnNotify method, using a component interface in the notification. This example shows error trapping and has multi language support:

```

Component string &PUBNODENAME;
/* save pubnodename to prevent circular publishes */
Local Message &MSG;
Local Rowset &MSG_ROWSET, &cur_rowset;
Local ApiObject &oSession;
Local ApiObject &CONTACT_CI;
Local number &I;
Local string &KEY1;
Local Record &REC;
Local boolean &BC_CREATE, &ADD;
Local boolean &TRANSACTION_ERROR, &MSG_ERROR;
/** Transaction/Message Error Flags**/

Function errorHandler()
    Local ApiObject &oPSMessageColl;
    Local ApiObject &oPSMessage;
    Local string &strErrMsgSetNum, &strErrMsgNum, &strErrMsgText,
        &strErrType;
    &oPSMessageColl = &oSession.PSMessages;
    For &I = 1 To &oPSMessageColl.Count
        &oPSMessage = &oPSMessageColl.Item(&I);
        &strErrMsgSetNum = &oPSMessage.MessageSetNumber;
        &strErrMsgNum = &oPSMessage.MessageNumber;
        &strErrMsgText = &oPSMessage.Text;
        &LogFile.WriteLine(&strErrType | " (" | &strErrMsgSetNum | ", "
            | &strErrMsgNum | ") - " | &strErrMsgText);
    End-For;
    rem ***** Delete the Messages from the collection *****;
    &oPSMessageColl.DeleteAll();
End-Function;

Function DO_CI_SUBSCRIBE()

    &oSession = %Session;

    &CONTACT_CI = &oSession.GETCOMPONENT(CompIntfc.CONTACT);
    If (&CONTACT_CI = Null) Then

```

```

    /* Replace this message with Tools message set when available */
    Error MsgGet(91, 58, " Unable to get the Component Interface.");
    Exit (1);
End-If;

/** Set Component Interface Properties */
&CONTACT_CI.GetHistoryItems = True;
&CONTACT_CI.Interactivemode = False; /** set this to True while
    debugging */
rem Send messages to the PSMessages Collection;
&oSession.PSMessagesMode = 1;

&MSG_ERROR = False;

For &I = 1 To &MSG_ROWSET.ActiveRowCount

    /** Set Session Language Code Property */
    &REGIONALSETTINGS = &oSession.RegionalSettings;
    &REGIONALSETTINGS.LanguageCd = &MSG_ROWSET(&I).PSCAMA.
        LANGUAGE_CD.Value;

    &TRANSACTION_ERROR = False;
    &BC_CREATE = False;

    /** Instantiate Component Interface */
    &KEY1 = &MSG_ROWSET(&I).CONTACT_TBL.PERSON_ID.Value;
    &CONTACT_CI.PERSON_ID = &KEY1;

    Evaluate &MSG_ROWSET(&I).PSCAMA.AUDIT_ACTN.Value
    When = "A"
    When = "N"
        &ADD = True;

        /* Check if Keys already exist. */
        &CONTACT_CIColl = &CONTACT_CI.Find();

        /*If None(&EXISTS) Then*/
        If &CONTACT_CIColl.Count = 0 Then
            If &CONTACT_CI.Create() Then
                &BC_CREATE = True;
            Else
                /* Replace this message with Tools message set
                    when available */
                Warning MsgGet(18022, 56, "Error creating Component
                    Interface for transaction %1", &I);
                &TRANSACTION_ERROR = True;
            End-If;
        Else
            If Not &CONTACT_CI.Get() Then
                /* Replace this message with Tools message set
                    when available */
                Warning MsgGet(18022, 59, "Could not Get Component
                    Interface for transaction %1", &I);
                &TRANSACTION_ERROR = True;
            End-If;
        End-If;
    Break;
    When = "C"
        &ADD = False;
        If Not &CONTACT_CI.Get() Then
            /* Replace this message with Tools message set when
                available */
            Warning MsgGet(18022, 59, "Could not Get Component
                Interface for transaction %1", &I);
            &TRANSACTION_ERROR = True;
        End-If;
    Break;
    When = "D"
    When = "K"
    When-Other
        /* delete and old key action codes not allowed at this

```

```

        time */
        &TRANSACTION_ERROR = True;
        Warning MsgGet(18022, 61, "Audit Action 'D' not allowed on
        transaction %1", &TRANSACTION);
        Break;
    End-Evaluate;

    &CONTACT_CI.CopyRowset(&MSG_ROWSET, &I);

    If Not &TRANSACTION_ERROR Then
        If Not &CONTACT_CI.save() Then
            /* Replace this message with Tools message set when
            available */
            Warning MsgGet(18022, 57, "Error saving Component
            Interface for transaction %1", &TRANSACTION);
            &TRANSACTION_ERROR = True;
        End-If;
    End-If;

    /** close the last Component Interface in preparation for
    getting the next */
    If Not &CONTACT_CI.Cancel() Then
        /* Replace this message with Tools message set when
        available */
        Warning MsgGet(18022, 58, "Error Canceling Component
        Interface for transaction %1", &TRANSACTION);
        Exit (1);
    End-If;

    /* Reset &TRANSACTION_ERROR to "False" for &BusComp.Save()
    to execute if no
    /* Transaction Error found in the next Transaction. */
    &TRANSACTION_ERROR = False;

End-For;

If &TRANSACTION_ERROR Then
    &MSG_ERROR = True;
End-If;

End-Function;

/**** Main Process ****/
&MSG.ExecuteEdits(%Edit_Required + %Edit_TranslateTable);
If &MSG.IsEditError Then
    &MSG_ERROR = True;
Else
    &PUBNODENAME = &MSG.PubNodeName;
    &MSG_ROWSET = &MSG.GetRowset();
    /* Do Component Interface subscribe */
    DO_CI_SUBSCRIBE();
End-If;

If &MSG_ERROR Then
    Exit (1);
End-If;

```

XmlDoc Class Inbound Asynchronous Example

The following example uses the GetXmlDoc method.

```

Local XmlDoc &Document;
Local XmlNode &node, &root;
Local string &outstring;
Local Rowset &LEVEL0;
Local Record &SALES_ORDER_INFO, &REC;

&CRLF = Char(13) | Char(10);

& Document = &MSG.GetXmlDoc();

```



```

&root = & Document.DocumentElement;
&child_count = &root.ChildNodeCount;

/* Get values out of XmlDocument */
&node_array = &root.GetElementsByTagName("QE_ACCT_ID");
&acct_id_node = &node_array.Get(2);
&account_id_value = &acct_id_node.NodeValue;

&node_array = &root.GetElementsByTagName("QE_ACCOUNT_NAME");
&acct_name_node = &node_array.Get(2);
&account_name_value = &acct_name_node.NodeValue;

&node_array = &root.GetElementsByTagName("QE_ADDRESS");
&address_node = &node_array.Get(2);
&address_value = &address_node.NodeValue;

&node_array = &root.GetElementsByTagName("QE_PHONE");
&phone_node = &node_array.Get(2);
&phone_value = &phone_node.NodeValue;

&outstring = "GetMessageXmlDoc Test";
&outstring = &outstring | &CRLF | &account_id_value | &CRLF
    | &account_name_value | &CRLF | &address_value | &CRLF |
    &phone_value;

&SALES_ORDER_INFO = CreateRecord(Record.QE_SALES_ORDER);
&SALES_ORDER_INFO.GetField(Field.QE_ACCT_ID).Value =
    &account_id_value;
&SALES_ORDER_INFO.GetField(Field.DESCRLONG).Value = &outstring;
&SALES_ORDER_INFO.Update();

```

Handling Inbound Asynchronous Request/Response Transactions

Implement the OnNotify method in the PS_PT application package, located in the Integration subpackage, to handle inbound asynchronous request/response transactions.

```

import PS_PT:Integration:INotificationHandler;

class FLIGHTDATA_RETURN implements PS_PT:Integration:INotificationHandler
    method FLIGHTDATA_RETURN();
    method OnNotify(&MSG As Message);
end-class;

/* constructor */
method FLIGHTDATA_RETURN
end-method;

method OnNotify
    /*+ &MSG as Message +/
    /*+ Extends/implements PS_PT:Integration:INotificationHandler.OnNotify +/
    /* Variable Declaration */

    Local string &str, &value;
    Local Rowset &rs;
    Local integer &num;

    Local Message &MSG, &MSG_resp;
    Local Record &FLIGHTDATA, &REC;

    &rs = &MSG.GetPartRowset(1);

    /* process request rowset */

    &MSG_resp = CreateMessage(Operation.FLIGHTPLAN_ARR, %IntBroker_Response);
    &rs = &MSG_resp.GetPartRowset(1);

    /* populate response rowset */

```

```

        &MSG_resp.IBInfo.WSA_MessageID = &MSG.IBInfo.WSA_MessageID;
        &MSG_resp.IBInfo.WSA_ReplyTo = &MSG.IBInfo.WSA_ReplyTo;
        &MSG_resp.IBInfo.WS_RequestAliasName = &MSG.IBInfo.WS_RequestAliasName;

        %IntBroker.Publish(&MSG_resp);
    end-method;

```

Handling Inbound Synchronous Transactions

Implement the OnRequest method in the PS_PT application package, in the Integration subpackage, to handle inbound synchronous transactions. All the examples in this section are assumed to be implementations of the OnRequest method.

Message Class Inbound Synchronous Example

The following example implements both the OnRequest method and the OnError method

```

import PS_PT:Integration:IRequestHandler;

class RequestMan implements PS_PT:Integration:IRequestHandler
    method RequestMan();
    method OnRequest(&MSG As Message) Returns Message;
    method OnError(&MSG As Message) Returns string;
end-class;

/* constructor */
method RequestMan
    %Super = create PS_PT:Integration:IRequestHandler();
end-method;

method OnRequest
    /* &MSG as Message */
    /* Returns Message */
    Local Message &response;

    &response = CreateMessage(Operation.SYNC_REMOTE,
        %IntBroker_Response);

    &response.GetRowset().GetRow(1).GetRecord(Record.QE_FLIGHTDATA).
        GetField(Field.DESCRLONG).Value = &MSG.GenXMLString();

    Return &response;
end-method;

method OnError
    /* &MSG as Message */
    /* Returns String */
    /* Extends/implements PS_PT:Integration:IRequestHandler.OnError */
    Local integer &nMsgNumber, &nMsgSetNumber;
    Local string &sText;

    &nMsgNumber = &MSG.IBException.MessageNumber;
    &nMsgSetNumber = &MSG.IBException.MessageSetNumber;
    rem    &sText = &exception.DefaultText;
    &sText = &MSG.IBException.ToString();

    /* ADD SPECIFIC ERROR INFO HERE */
    Return &sText;
end-method;

```

XmlDoc Class Inbound Synchronous Example

The following example uses the GetXmlDoc method:

```
Local XmlDoc &xmlRequestDoc;
Local XmlDoc &xmlResponseDoc;
Local XmlNode &select;
Local Message &Return_MSG;
Local array of XmlNode &whereClause;

Local string &recordName;
Local string &fieldName;
Local string &fieldValue;
Local Rowset &outputRowset;
Local boolean &return_bool_value;

&xmlRequestDoc = &MSG.GetXmlDoc();
&select = &xmlRequestDoc.DocumentElement;

&recordName = &select.GetAttributeValue("record");
&outputRowset = CreateRowset(@("Record." | &recordName));

&whereClause = &select.GetElementsByTagName("where");
If &whereClause <> Null And
    &whereClause.Len <> 0 Then
    &fieldName = &whereClause.Get(1).GetAttributeValue("field");
    &fieldValue = &whereClause.Get(1).GetAttributeValue("value");
    &outputRowset.Fill("WHERE " | &fieldName | "= :1", &fieldValue);
Else
    &outputRowset.Fill();
End-If;

&Return_MSG = CreateMessage(OPERATION.EXAMPLE, %IntBroker_Response);
&xmlResponseDoc = &Return_MSG.GetXmlDoc();
&b = &xmlResponseDoc.CopyRowset(&outputRowset);
Return &Return_MSG;
```

SoapDoc Class Inbound Synchronous Example

The following example uses the GetXmlDoc method.

Note: Because GetXmlDoc returns an XmlDoc object, you must receive the inbound request message as an XmlDoc object, then convert it to a SoapDoc object to process it with SOAP methods.

```
Local XmlDoc &request, &response;
Local string &strXml;
Local SoapDocs &soapReq, &soapRes;
Local Message &Response_Message;

&soapReq = CreateSoapDoc();

&request = &MSG.GetXmlDoc();
&soapReq.XmlDoc = &request;
&OK = &soapReq.ValidateSoapDoc();
&parmN = &soapReq.GetParmName(1);
&parmV = &soapReq.GetParmValue(1);

&Response_Message = CreateMessage(OPERATION.SoapExample,
%IntBroker_Response);

&response = &Response_Message.GetXmlDoc();
&soapRes = CreateSoapDoc();
&soapRes.AddEnvelope(0);
&soapRes.AddBody();
&soapRes.AddMethod("StockPrice", 1);
&soapRes.AddParm(&parmN, &parmV);
&soapRes.AddParm("Price", "29");
```

```
&OK = &soapRes.ValidateSoapDoc();

&response = &soapRes.XmlDoc;
Return &Response_Message;
```

Simulating Receiving Messages from External Nodes

You can use PeopleCode to simulate receiving asynchronous messages from external nodes, including running transformations.

Use can use the IntBroker class InboundPublish method to work with rowset-based and nonrowset-based messages.

The following example shows an inbound publish as part of an OnNotify method implementation with a rowset-based message:

```
Local Message &MSG_REMOTE;
Local Rowset &rs;

&rs = &MSG.GetRowset();
/*create the message to be re-published from a simulated remote node*/

&MSG_REMOTE = CreateMessage(OPERATION.QE_FLIGHTPLAN);

&MSG_REMOTE.IBInfo.RequestingNodeName = "QE_IBTGT";

&MSG_REMOTE.IBInfo.ExternalOperationName = &MSG_REMOTE.OperationName | "." |
&MSG_REMOTE.OperationVersion;

&MSG_REMOTE.CopyRowset(&rs);

&Ret = %IntBroker.InBoundPublish(&MSG_REMOTE);
```

The following example shows an inbound publish as part of an OnNotify implementation with a nonrowset-based message:

```
Local Message &MSG_REMOTE;
Local XmlDoc &xmldoc;
Local Rowset &rs;

&xmldoc = &MSG.GetXmlDoc();
/*create the message to be re-published from a simulated remote node*/

&MSG_REMOTE = CreateMessage(OPERATION.QE_FLIGHTPLAN);

/* populate the Remote Message with data to be re-published*/

&MSG_REMOTE.SetXmlDoc(&xmldoc);

%IntBroker.InBoundPublish(&MSG_REMOTE, Node.REMOTE_NODE);
```

Configuring Timeout for Synchronous Services

Administrators can use the System Setup Options page to configure timeout for synchronous services.

To access the System Setup Options page, select **PeopleTools > Integration Broker > Configuration > Integration Broker Options**.

This example illustrates the fields and controls on the System Setup Options page.

System Setup Options

Rowset-based message parts maximum recursion level check.

Message builder depth limit:

Enable runtime Profile information for Sync/Async processing.

☐ **IB Profile Status On**

Sync Secondary Templates ServerURL registration. By default MachineName is used.

☐ **Use IP Address**

Default SyncRequest Outbound Timeout (in seconds)

Sync Timeout:

To configure timeout for all synchronous services:

1. Enter a value, in seconds, in the **Sync Timeout** field. The default value is 120 seconds.
2. Select the **Save** button.

Processing Inbound Errors

This section discusses how to:

- Validate data.
- Use the Exit built-in function.
- Correct messaging errors.

Validating Data

You validate data differently depending on the PeopleCode class that you're using to receive the message.

XMLDoc Class Validation

You can validate incoming XML DOM-compliant messages by using the XmlDoc document type definition (DTD) that is delivered with your PeopleSoft application.

See “Understanding XmlDoc Classes” (PeopleCode API Reference).

SoapDoc Class Validation

You can validate SOAP-compliant messages by using the ValidateSoapDoc method in the PeopleCode SoapDoc class.

See “Understanding theSOAPDoc Class” (PeopleCode API Reference).

Message Class Validation

Have a message receiving process validate incoming data by:

- Using the ExecuteEdits method in the code to invoke the definitional edits.
- Calling PeopleCode validation built-in functions (if they already exist, for example in a FUNCLIB record, or if validation logic can be encapsulated within a small set of built-in functions) from within the receiving PeopleCode.
- Calling a component interface or Application Engine program from the receiving process (for complex validation logic).

This enables you to reuse logic that is embedded in the component.

The ExecuteEdits method uses the definitional edits to validate the message. You can specify the following system variables alone or in combination. If you don't specify a variable, all of the edits are processed.

- %Edit_DateRange
- %Edit_OneZero
- %Edit_PromptTable
- %Edit_Required
- %Edit_TranslateTable
- %Edit_YesNo

The following example processes all edits for all levels of data in the message structure:

```
&MYMSG.ExecuteEdits();
```

The following example processes the Required Field and Prompt Table edits:

```
&RECPURCHASEORDER.ExecuteEdits(%Edit_Required +  
%Edit_PromptTable);
```

ExecuteEdits uses *set processing* to validate data. Validation by using a component interface or a PeopleCode built-in function is usually done with row-by-row processing. If a message contains a large

number of rows per rowset, consider writing the message to a staging table and calling an Application Engine program to do set processing if you want additional error checking.

ExecuteEdits sets several properties on several objects if there are any errors:

- IsEditError is set on the Message, Rowset, Row, and Record objects if any fields contain errors.
- EditError, MessageNumber, and MessageSetNumber are set on the Field object that contains the error.

If you don't want to use ExecuteEdits, you can set your own errors by using the field properties. Setting the EditError property to True automatically sets the IsEditError message property to True. You can also specify your own message number, message set number, and so on, for the field. If you use the Exit(1) built-in function, the message status changes to Error when you finish setting the fields that are in error.

Using the Exit Built-in Function

Use the Exit built-in function to invoke a messaging error process when the application finds an error. This works only when you use the PeopleCode Message class to process inbound transactions. The same error processing is invoked automatically if PeopleTools finds an unexpected error, such as a Structured Query Language (SQL) error. The Exit built-in function has an optional parameter that affects how the error is handled.

To handle error processing in application tables, use the Exit built-in function with no parameter, or just let the notification process finish normally. This marks the message receipt as successful and commits the data.

To handle the error tracking and correction with PeopleSoft Integration Broker, use the Exit built-in function with 1 as a parameter to log the errors, perform a rollback, and stop processing.

Using the Exit Built-in Function Without Parameters

In the `Exit ( )` form (that is, Exit without any parameters specified), all data is committed and the message is marked as complete. Use this to indicate that everything processed correctly and to stop program processing. Note, though, that the message status is set to Complete; therefore, you can't detect or access errors in the Service Operations Monitor. If errors did occur, the subscription code should write them to a staging table, and then you must handle all of the error processing.

The Exit built-in function:

- Sets the message status in the application message queue for the subscription to Done.
- Commits the transaction.
- Stops processing.

Following is an example of using Exit without a parameter:

```
&MSG.ExecuteEdits();
If &MSG.IsEditError then
    App_Specific_Error_Processing();
    Exit();
Else
    Specific_Message_Processing();
End-if;
```

Using the Exit Built-in Function with Parameters

When you supply a 1 as a parameter for the Exit built-in function, the function:

- Processes a rollback.
- Sets the message status in the message queue for the subscription to Error.
- Writes the errors to the subscription contract error table.
- Stops processing.

You can view all errors that have occurred for this message in the Service Operations Monitor, even those errors that are detected by ExecuteEdits.

Following is an example of using the Exit function with 1 as a parameter:

```
&MSG.ExecuteEdits();  
If &MSG.IsEditError then  
    Exit(1);  
Else  
    Process_Message();  
End-if;
```

Related Links

Integration Broker Service Operations Monitor

Using Message Object Functionality With Nonrowset-Based Messages

Prior to the PeopleTools 8.44 release, there were two distinct paths for writing and executing PeopleCode for PeopleSoft Integration Broker which were based on whether you were working with rowset-based XML messages or nonrowset-based XML messages.

For rowset-based XML messages, you could use a rowset and all the properties and methods associated with the Message class. For nonrowset-based XML messages, you could not use the Message class, but instead used built-in functions such as PublishXmlDoc and GetMessageXmlDoc. In addition, when working with nonrowset-based messages and these built-in functions, you could only access content data.

Effective with the PeopleTools 8.44 release, when working with nonrowset-based XML messages you can use *all* of the functionality of the Message object using two new methods, SetXMLDoc and GetXMLDoc.

<i>Field or Control</i>	<i>Description</i>
SetXMLDoc	Use this method to load and pass nonrowset-based data into the Message object.
GetXMLDoc	Use this method to get nonrowset-based data out of the message object.

Using the SetXMLDoc Method

The following example shows how to use SetXMLDoc to use the Message object to publish a nonrowset-based message.

```
//&XmlDoc holds the nonrowset-based data as before.  
  
// create an instance of the Message object  
&MSG = CreateMessage(OPERATION.QE_F18_ASYNC_XMLDOC);  
// Load the Message object with the xmldoc data.  
&MSG.SetXmlDoc(&XmlDoc);  
// perform a publish for the nonrowset-based message  
%IntBroker.Publish(&MSG);
```

Using the GetXMLDoc Method

The following code example shows how to use GetXMLDoc to get nonrowset-based XML out of the Message object.

```
Local XMLDOC &XmlDoc;  
  
// get an xmldoc object loaded with the content data.  
&XmlDoc = &MSG.GetXmlDoc();
```

Related Links

“Understanding Message Classes” (PeopleCode API Reference)

Generating Test Messages

Use the Handler Tester utility to generate test messages.

See “Understanding the Handler Tester Utility” (Integration Broker Testing Utilities and Tools)

Working With Message Segments

This section provides an overview of message segments and discusses how to:

- Configure nodes to handle segmented messages.
- Set the maximum number of messages in a message segment.
- Create message segments.
- Delete message segments.
- Send and receive segmented messages between PeopleSoft systems.
- Send and receive segmented messages to/from third-party systems.
- Send and receive large segmented messages using parallel processing.
- Access message segments.

- View message segment data.
- Use restartable processing for publishing large messages in batch.

Related Links

“Sending and Receiving Large Segmented Messages Using Parallel Processing” (Integration Broker Administration)

Understanding Message Segments

When you create message segments, you can divide rowset-based and nonrowset-based messages into multiple data containers, or segments, for sending. Depending on the order in which you send a message that contains message segments, the receiving system can process the message as a whole, or process one segment at a time while the others are compressed in memory or held in the application database.

As a result creating message segments can enhance system performance and message exchange, especially when you are working with large messages that exceed one gigabyte (1 GB).

To create and manage message segments, you use several methods and properties of the PeopleCode Message class.

Understanding PeopleCode used to Work with Message Segments

This section discusses:

- Methods used with message segments.
- Properties used with message segments.

Methods Used with Message Segments

The following table lists the PeopleCode methods you can use when you work with message segments.

<i>Method</i>	<i>Class</i>	<i>Description</i>
CreateNextSegment	Message	Designates the end point of one segment and the beginning of a new segment.
DeleteOrphanedSegments	IntBroker	Used to delete segments that might have been orphaned if you were processing message segments using a PeopleSoft Application Engine program that had to be restarted.
DeleteSegment	Message	Deletes a segment.

Method	Class	Description
GetSegment	Message	Gets the segment specified by the passed value. The passed value is the segment number.
UpdateSegment	Message	Use this method to update data within the current segment.

Note: Use the DeleteSegment and UpdateSegment methods only when storing segments data in memory. These methods do not function when segment data is stored in the database.

Properties Used with Message Segments

The following table lists PeopleCode properties that you can use when you work with message segments.

Property	Class	Description
CurrentSegment	Message	Returns a number, indicating which segment is the current segment.
SegmentsUnOrder	IBInfo	Determines whether to process message segments in order or unordered. This property pertains to asynchronous messages only. The values are: <i>True</i>: Process message segments unordered. <i>False</i>: Process message segments in order. (Default.)
SegmentCount	Message	Returns the total number of segments in a message.

Property	Class	Description
SegmentsByDatabase	Message	Enables you to override where message segment data is stored for a message. The values are: • <i>True</i>: Store message segments awaiting processing in the application database. • <i>False</i>: Store message segments awaiting processing in memory. (Default.)

Related Links

PeopleCode API Reference

Configuring Nodes to Handle Segmented Messages

This section describes how to configure nodes to handle segmented messages.

Understanding Configuring Nodes to Handle Segmented Messages

Before you can send segmented messages, you must configure the remote node defined on the local system to handle segmented messages by setting the **Segment Aware** option on the Node Definitions page in the PeopleSoft Pure Internet Architecture.

Warning! Do not set the Segment Aware option for remote PeopleSoft 8.45 or earlier nodes, or for third-party systems. If you do so, the receiving system will consume only the first segment of the messages and ignore any subsequent segments.

Configuring a Node to Handle Segmented Messages

To configure a node to handle segmented messages:

1. Select **PeopleTools > Integration Broker > Integration Setup > Node Definitions**.
2. Select a node with which to work and click **OK**.

The Node Definitions page appears.

3. Select the **Segment Aware** check box.
4. Click the **Save** button.

Setting the Maximum Number of Message Segments in Messages

The **Maximum Number of Segments** parameter is a built-in global parameter that determines the maximum number of segments that can exist in a message. When the number is met, a new message is created and begins to be populated.

The default value is *10*.

The **Maximum Number of Segments** parameter is set on the PeopleTools Options page (PSOPTIONS). To access the page select **PeopleTools** > **Utilities** > **Administration** > **PeopleTools Options**.

You can also manipulate the maximum number of message segments for a message in PeopleCode using the %MAXNBRSEGMENTS built-in function.

Creating Message Segments

This section provides an overview of creating message segments and message segment numbers and discusses how to:

- Create message segments.
- Count the number of segments in messages.
- Store message segments awaiting processing.
- Override where to store message segment awaiting processing.
- Specify the order in which to process message segments.
- Chunk asynchronous segmented messages.

Understanding Creating Message Segments

By default every message has one segment.

To create multiple message segments use the CreateNextSegment method in the location in the message where you want one segment to end and next segment to begin. Continue this process until you have created the desired number of segments for the message.

Segments can contain any number of rowsets of data (rowset-based messages) or rows of data (nonrowset-based messages).

Understanding Message Segment Numbers

When you create a message segment, PeopleSoft Integration Broker assigns a message segment number to the segment.

The first message segment has a message segment number of 1, and message segment numbers are incremented by one sequentially thereafter. As an example, if you break a message into three segments, the first segment number is 1, the second segment number is 2, and the third segment number is 3.

Creating Message Segments

The following example shows using the `CreateNextSegment` method to create three segments in the message `QE_FLIGHTPLAN`, populating each segment with data from the component buffer.

```
&MSG = CreateMessage (OPERATION.QE_FLIGHTPLAN);

&rs=&MSG.GetRowset();
//Now populate rowset
// End of first segment. Beginning of second segment.
&MSG.CreateNextSegment();

&rs=&MSG.GetRowset();
//Now populate rowset
//End of second segment. Beginning of third segment.
&MSG.CreateNextSegment();

&rs=&MSG.GetRowset();
//Now populate rowset

%IntBroker.Publish(&MSG);
```

Counting the Number of Segments in Messages

You might have the need to determine the number of segments in a message. Use the `SegmentCount` property to determine this information.

Storing Message Segments Awaiting Processing

By default, message segments awaiting processing are stored in memory until all segments are processed. Once all segments are processed, PeopleSoft Integration Broker sends all data as one message.

Use the `MessageSegmentFromDB` parameter in PSAdmin to specify the number of segments to keep in memory before writing segmented messages to the database. The default value is *10*.

For synchronous messages, if the number of segments sent for processing exceeds the set for the `MessageSegmentsFromDB` parameter, an error occurs.

Overriding Where to Store Message Segments Awaiting Processing

You can override the number of segments to keep in memory before writing segmented messages to the database for a single message using the `SegmentsByDatabase` property of the `Message` class.

Storage Location	Description
Memory	When message segments are stored in memory, PeopleSoft Integration Broker writes all segments as one message to the database when you send the message. To store message segment data in memory, set the <code>SegmentsByDatabase</code> property to <i>False</i>. (Default.)

Storage Location	Description
Application database	When message segments are stored in the database, PeopleSoft Integration Broker writes the segments to the database individually. When you store message segments in the database you can have an infinite number of segments in a message. To store message segment data in the application database, set the SegmentsByDatabase property to <i>True</i>.

When you store message segments in memory, the number of segments is limited by the value set in the MessageSegmentFromDB parameter in PSAdmin in the Setting for PUB/SUB servers section of the file.

When working with asynchronous messages, if you create more message segments then the value set, all segments are written to the database automatically and the SegmentsByDatabase property will automatically be set to *True*.

For synchronous messages, attempting to create more segments then the specified value will result in an error message.

Specifying the Order in Which to Process Message Segments

When you work with segmented asynchronous messages you can specify that PeopleSoft Integration Broker process the segments in order or unordered, using the SegmentsUnOrder property of the Message class.

Message Segment Processing	Description
In order	When Integration Broker processes message segments in order, it decompresses all message segments sequentially and then processes the message as a whole. In this situation, only one publication or subscription contract is created. To process message segment in order, set the SegmentsUnOrder property to <i>False</i>.
Unordered	When Integration Broker processes message segments unordered, it decompresses and processes all segments in parallel. In this situation, the system creates one publication or subscription contract for each message segment. To process message segment unordered, set the SegmentsUnOrder property to <i>True</i>.

If you attempt to send ordered segmented messages to a node that is not segment aware an error message will be created and can be viewed on the Message Errors tab on the Message Details page in Service Operations Monitor.

See the product documentation for [Integration Broker Service Operations Monitor](#).

Chunking Asynchronous Segmented Messages

Chunking asynchronous segmented messages sends message in blocks to the receiving node.

When using chunking, message instances display in *Hold* status in the Service Operations Monitor until all chunks are received. Once all chunks are received, the message status switches to *New*.

Note: Chunking applies to ordered asynchronous messages only.

The number of segments to chunk for an asynchronous message is determined by the value you set for the `MessageSegmentByDatabase` parameter in PSAdmin. The default value is *10*.

As an example, if a message has 20 segments and you set `MessageSegmentByDatabase` to 5, PeopleSoft Integration Broker will send four groups (array of messages) of segments to the integration gateway, and each group will contain five segments.

Deleting Message Segments

You can delete message segments in a message only before you publish the message.

Use the `DeleteSegment` method of the `Message` class to perform the action.

You cannot delete the first segment in a message.

The following example demonstrates using the `DeleteSegment` method in an implementation of the `OnRequestSend` method.

```
import PS_PT:Integration:ISend;

class Send implements PS_PT:Integration:ISend
  method Send();
  method OnRequestSend(&message As Message) Returns Message;
  method OnError(&message As Message)
end-class;

/* constructor */
method Send
  %Super = create PS_PT:Integration:ISend();
end-method;

method OnRequestSend
  /* &message as Message */
  /* Returns Message */
  /* Extends/implements PS_PT:Integration:ISend.OnRequestSend */
  Local integer &segment_number, &i;
  Local Rowset &rs;

  For &i = 1 To &message.SegmentCount
    &rs = Null;
    &message.GetSegment(&i);

    &rs = &message.GetRowset();

    /* determine that segment 3 needs to be deleted. */
    &segment_number = &i;

  End-For;

  &message.DeleteSegment(&segment_number);
```



```

        Return &message;
    end-method;

    method OnError
        /+ &message as Message +/
        /+ Extends/implements PS_PT:Integration:ISend.OnError +/
    end-method;

```

Sending and Receiving Segmented Messages between PeopleSoft Systems

This section discusses how to:

- Send segmented messages to PeopleSoft systems.
- Receive segmented messages from PeopleSoft systems.

Sending Segmented Messages to PeopleSoft Systems

To send a segmented message, use sending PeopleCode and events as you would with any other message.

Use the PeopleSoft target connector when the receiving node is a PeopleSoft system. The PeopleSoft target connector automatically handles message segments, and no additional configuration is required on the connector.

Before sending a transaction with message segments, on the sending PeopleSoft system, be sure that the **Segment Aware** check box is selected for the remote node that represents the receiving system.

Receiving Segmented Messages from PeopleSoft Systems

To receive segmented message from PeopleSoft systems, use notification PeopleCode or implement the `OnRequest` method.

Use the PeopleSoft listening connector to receive transactions that contain message segments from other PeopleSoft systems. The PeopleSoft listening connector automatically handles message segments, and no additional configuration is required on the connector.

Sending and Receiving Segmented Messages to/from Third-Party Systems

This section discusses how to:

- Send segmented messages to third-party systems.
- Receive segmented messages from third-party systems.

Understanding DataChunkCount and DataChunk Properties

PeopleSoft Integration Broker uses two properties to communicate to sending and receiving systems the number of message segments that are contained in a transaction:

Field or Control	Description
DataChunkCount	Indicates the total number of data chunks or message segments contained in the transaction.
DataChunk	Indicates the number of the data chunk or message segment that you are sending. For example, if there are a total of seven data chunks in the transaction, and the current segment is the third chunk, the DataChunk value for the current message is 3.

Note that when you are sending and receiving message segments between PeopleSoft systems these properties are not used. The PeopleSoft target and listening connectors perform all necessary processing.

Sending Segmented Messages to Third-Party Systems

To send segmented messages from PeopleSoft systems to third-party system, use one of the following target connectors:

- HTTP target connector
- JMS target connector
- SMTP target connector

No additional target connector configuration is required to send segmented messages. These connectors read the messaging PeopleCode on the integration gateway and determine the number of segments contained in the transaction. They then populate the DataChunkCount and DataChunk parameters and include this information with each outbound segment sent. All of these connectors except for the HTTP target connector send the DataChunkCount and DataChunk information in the message header of each outbound message segment. The HTTP target connector includes the DataChunkCount and DataChunk parameter information in the HTTP header of each outbound message segment.

Before sending a transaction with message segments, on the PeopleSoft system, be sure that the **Segment Aware** check box is selected for the remote node that represents the third-party integration partner.

Receiving Segmented Messages from Third-Party Systems

At this time, only the HTTP listening connector can be used to receive message segments from third-party systems.

To receive segmented messages with third-party integration partners, the third-party must specify the following DataChunkCount and DataChunk parameters in the HTTP properties, query arguments, or SOAP header:

The receiving PeopleSoft system must use the HTTP listening connector as only this connector monitors transactions for these parameters.

After the third party sends in the first segment, the PeopleSoft system sends an acknowledgement to the third-party system. The acknowledgment contains a transaction ID that the third-party integration partner must include with all subsequent segments.

The following bullet points describe sample processing for a third-party integration partner sending a transaction to a PeopleSoft system that contains three segments:

1. First segment processing:

- a. The third-party integration partner prepares the first message/segment of the transaction. In the HTTP properties, query string, or SOAP header, it sets the `DataChunk` equal to `1` indicating the first chunk, and sets the `DataChunkCount` equal to `3` indicating total number of chunks to be sent for the transaction.
- b. When the request is received by the PeopleSoft system the data chunk is saved in the database as a segment.
- c. In the Service Operations Monitor the transaction displays a status of *Hold*.
- d. The PeopleSoft system sends an acknowledgement to the third-party system, which includes a transaction ID.

Note: The third-party integration partner must include the transaction ID as part of all subsequent requests for the transaction. The PeopleSoft system uses the transaction ID to identify the segments that belong to the transaction.

2. Second segment processing:

- a. The third-party integration partner prepares the second message/segment of the transaction. In the HTTP properties, query string, or SOAP header, it sets the `DataChunk` equal to `2` indicating that the message is the second chunk, and sets the `DataChunkCount` equal to `3` indicating total number of chunks to be sent for the transaction. It also specifies the transaction ID sent by the PeopleSoft system in the acknowledgement for the first segment.
- b. When the request is received by the PeopleSoft system the data chunk is saved in the database as a segment.
- c. In the Service Operations Monitor the transaction displays a status of *Hold*.

3. Third segment processing:

- a. The third-party integration partner prepares the third message/segment of the transaction. In the HTTP properties, query string, or SOAP header, it sets the `DataChunk` equal to `3` indicating that the message is the third chunk, and sets the `DataChunkCount` equal to `3` indicating total number of chunks to be sent for the transaction. It also specifies the transaction ID sent by the PeopleSoft system in the acknowledgement for the first segment.
- b. When the request is received by the PeopleSoft system the data chunk is saved in the database as a segment.
- c. Since the PeopleSoft system has received all of the segments in the transaction, in the Service Operations Monitor the transaction displays a status of *New*.
- d. The PeopleSoft system processing the transaction like any other transaction at this point.

The PeopleCode to read the data chunks/segments is the Message Segment API.

Sending, Receiving, and Correlating Multiple Segmented Messages

Previous sections in this topic have discussed sending one message that contains multiple message segments. For very large messages this can have performance impact due to the large number of segments.

PeopleSoft provides PeopleCode that allows you to send multiple messages with multiple segments and then correlate them into one transaction on the receiving system. So instead of sending one message with 50 message segments, you can send 10 messages with 5 message segments using parallel processing, and then correlate the 10 messages on the receiving system.

The `InitializeConversationId` property on the `Message` object, provides the correlation between messages. The `FirstCorrelation` method on the `Message` object ensures that the database table is truncated after receipt of the first message only.

On the first message to be published set the `InitializeConversationId` property to *True*. After the message is published retrieve the transaction ID from the message. For all subsequent messages, set the `CorrelationID` property to the value of the transaction ID returned from the first message. As a result, when the messages arrive at the receiving system they have different transaction IDs, but all have the same correlation ID.

On the receiving system when the first message is received the database table is truncated. To prevent a destructive load from occurring with the receipt and processing of each subsequent message, use the `PreNotify` event. You can use the `PreNotify` event to truncate the database table upon receipt of the first message. In subsequent messages use the `FirstCorrelation` method in the event, setting the method to *True*, to determine if a prior message with the same correlation ID has already run the event.

The following example shows an example of how the sending system uses the `InitializeConversationId` property:

```
/*First Message to Publish */

&MSG. InitializeConversationId = true;
%IntBroker.Publish(&MSG);
&strCorrelationID = &MSG.TransactionId;

/* all subsequent message to correlate*/

&MSG. IBInfo.ConversationID = &strCorrelationID;
%IntBroker.Publish(&MSG);
```

The following example shows an example of how the receiving system uses the `FirstCorrelation` method in the `PreNotify` event:

```
PreNotify Event:

If &MSG.FirstCorrelation() = true Then
/* process the event logic */

End-If;
```

Accessing message segments is described elsewhere in this section.

See [Accessing Segments in Messages](#).

Related Links

“FirstCorrelation” (PeopleCode API Reference)

“InitializeConversationId” (PeopleCode API Reference)

“Sending and Receiving Large Segmented Messages Using Parallel Processing” (Integration Broker Administration)

Accessing Segments in Messages

After you receive a segmented message, use the GetSegment method of the Message class to access message segment data.

After you access a message segment, use the Message class GetRowset or GetXmlDoc methods to work with the contents of the segment.

Warning! You can access only one segment in a message at a time. When you access a message segment, PeopleSoft Integration Broker removes the previously accessed message segment from memory.

When you access a message segment, set the existing rowset to null to eliminate storing multiple rowsets in the data cache.

The following example shows using the GetSegment method to access a message segment in the message QE_FLIGHTDATA.

```
For &i = 1 To &MSG.SegmentCount
    &rs = Null; //Null the rowset to remove it from memory
    &MSG.GetSegment(&i);

    &rs = &MSG.GetRowset();
    &REC = &rs(1).QE_FLIGHTDATA;

    &FLIGHTDATA = CreateRecord(Record.QE_FLIGHTDATA);
    &REC.CopyFieldsTo(&FLIGHTDATA);

    /* Parse out Message Data */
    &acnumber_value = &FLIGHTDATA.QE_ACNUMBER.Value;
    &msi_sensor_value = &FLIGHTDATA.QE_MSI_SENSOR.Value;
    &ofp_value = &FLIGHTDATA.QE_OFFP.Value;
    &actype_value = &FLIGHTDATA.QE_ACTYPE.Value;
    &callsign_value = &FLIGHTDATA.QE_CALLSIGN.Value;
    &squadron_value = &FLIGHTDATA.QE_SQUADRON.Value;
    &comm1_value = &FLIGHTDATA.QE_COMM1.Value;
    &comm2_value = &FLIGHTDATA.QE_COMM2.Value;
    &ecm_value = &FLIGHTDATA.QE_ECM.Value;

    &outstring = "Send Async Flight test";

    /* Construct Output String */
    &outstring = &outstring | &acnumber_value | &CRLF |
    &msi_sensor_value | &CRLF | &ofp_value | &CRLF | &actype_value |
    &CRLF | &callsign_value | &CRLF | &squadron_value | &CRLF |
    &comm1_value | &CRLF | &comm2_value | &CRLF | &ecm_value;

    /* Log Output String into page record */
    &FLIGHTDATA.GetField(Field.DESCRLONG).Value = &outstring;

    SQLExec("DELETE FROM PS_QE_FLIGHTDATA");
    &FLIGHTDATA.Insert();

End-For;
```

Viewing Message Segment Data

The Service Operations Monitor Message Details page provides information about messages that contain segments.

Related Links

“Viewing Asynchronous Service Operation Instance Details” (Integration Broker Service Operations Monitor)

Using Restartable Processing for Publishing Large Messages in Batch

This section provides an overview, prerequisites and setup steps for using restartable processing for publishing large asynchronous segmented messages in batch.

Understanding Using Restartable Processing

PeopleSoft provides a PeopleSoft Application Engine library module, IB_SEGTEST, that you can use as a template to create a module to aid in processing large messages and messages in batch for outbound asynchronous PeopleSoft Integration Broker segment data with restart capability.

With restart capability, if there is an abnormal program termination, you can correct any data errors and continue processing from the point of the last commit without having to reload message segment data from the beginning.

Understanding the IB_SEGTEST Application Engine Library Module

This section provides overview information for using the IB_SEGTEST

The IB_SEGTEST library module consists of three sections:

- Section 1: Section1. The main processing section.
- Section 2: ABORT. Use to trigger a user abort of the running application engine program
- Section 3: CLEANSEG. An independent section you can call to clean up pending segment data that had been committed to the database but is no longer to be used.

Prerequisites

To use the information provided in this section, you should have a thorough understanding of PeopleSoft Application Engine.

Using the IB_SEGTEST Library Module

This section provides an overview of the high-level list of tasks to perform to set up a PeopleSoft Application Engine program to perform restartable message processing.

1. Make a copy of IB_SEGTEST, including all sections and PeopleCode.

From here on, the copy of the application engine library module is referred to as IB_SEGTEST1, but you can use any name you choose.

2. In the State Records tab of IB_SEGTEST1, verify that PSIBSEGRSTR_AET is the default state record. Replace PT_EIP_ERR_AET with whatever state record is used in the main application engine program that will be calling the Library module.

Note that IB_SEGTEST1 is flagged as not restartable. Since database commits will be performed in the middle of PeopleCode processing, the only way the commits can take effect is if the module is flagged as not restartable.

3. The application engine program used to call IB_SEGTEST1 should be restartable.

Always issue a commit in the step prior to calling the library module IB_SEGTEST1.

4. In the application engine program that will be calling IB_SEGTEST1, insert a step to call IB_SEGTEST1, section Section1. Insert the step at the point in time when you want to do the message publish. You must issue a commit prior to calling this section, otherwise there will be a 'Unable to Process Commit' error issued from within IB_SEGTEST1.
5. Add PSIBSEGRSTR_AET as an additional state record to the calling application engine program.
6. Since both programs now share state records, when IB_SEGTEST1 is called, all state record values will be passed on to the called module. Presumably all application values needed to extract application data would be stored in the application state record.
7. Modify the PeopleCode in IB_SEGTEST1.Section1. Several comments have been added to the code to aid in the modifications. Note the following:
 - Change `&MSG = CreateMessage (OPERATION.QE_FLIGHTPLAN)` to create whatever message will be used.
 - SegmentsByDatabase should always be set to True.
 - The While loop is used to simulate application code processing large volumes of data. This can be changed to meet application needs. However, pay close attention as to when commits are issued, when state records are updated, when new segments are created, and finally, when the message publish is executed. The order of these events is crucial to proper workability. In the sample program, also note how to break out of the While loop.
 - Note the location where the application state record needs to be updated. A comment instructs in the PeopleCode provides instructions on where to perform this task.
 - Do not remove the `Exit (1)` from the end of the PeopleCode. This is necessary to bypass the Abort action that is coded into the same Step.
 - If in the middle of processing, the application code determines that an abort needs to be triggered, an `Exit (0)` can be coded. This triggers the Abort step to be called, which will terminate application engine processing. A restart could then be issued if processing needs to continue.

If you determine that a message no longer needs to be published, the calling application engine program could then call the CLEANSEG step to get rid of all the pending data that has been saved in the database. Alternatively, the Abort step could be modified to call CLEANSEG if on any abort, no old data is to be kept.

See the product documentation for Application Engine for more information about application engine programs.

Populating and Retrieving Document Data

This section discusses how to:

- Instantiate Documents objects.
- Populate document data.
- Retrieve document data.

Understanding Populating and Retrieving Document Data

This section provides guidelines for instantiating Document objects, and populating and retrieving document data from document message types.

Memory Management in Message Segments that Use Documents

Following these guidelines when populating or retrieving document data from message segments:

- After your code to populate a segment, set the following statement to *NULL*:

```
&DOC = null;
```

Including this statement in your code releases the segment data from memory. If you do not include this statement in your code, data from all segments accumulates in memory.

- Start each new segment processing section by setting the following statement to *TRUE*:

```
&DOC = &MSG.GetDocument(true)
```

Including this statement in your code guarantees that only one segment is in memory at a given time.

Instantiating Document Objects

This section discusses and provides examples for how to:

- Instantiate Document objects using package, name, and version.
- Instantiate Document objects using document keys.
- Instantiate Document objects for document message types.

Instantiating Document Objects Using Package, Name, and Version

You can instantiate a Document object using the CreateDocument built-in function. Using this approach, you use the Create Document built-in function, and then specify the document package name, the document name, and the document version, as shown in the following example:

```
&DOC = CreateDocument("Purchasing", "PurchaseOrder", "v1");
```


Instantiating Document Objects Using Document Keys

The following code example shows instantiating a Document object using the a document key. This approach uses the CreateDocumentKey and CreateDocument built-in functions.

First you instantiate a Document Key object, using the CreateDocumentKey built-in function and passing in the document package name, document name, and document version. You then instantiate a Document object using the CreateDocument built-in function, and pass in the document key.

```
&DOCKEY = CreateDocumentKey("Purchasing", "PurchaseOrder", "v1");
&DOC = CreateDocument(&DOCKEY);
```

Instantiating Document Objects for Document Message Types

The following example shows how to instantiate a document object when the document is being used as a message type.

```
&DOC = &MSG.GetDocument();
```

Populating Document Data

This section discusses and provides examples for how to:

- Populate documents from messages.
- Populate document using rowsets.
- Populate message segments with documents.

Populating Documents from Messages

The following example shows how to use the CreateMessage built-in function to populate a document from a message:

```
&MSG = CreateMessage(Operation.PURCHASE_ORDER);
&DOC = &MSG.GetDocument();
```

Populating Documents Using Rowsets

The following example shows using the CreateMessage built-in function and the Document class to populate a document using a rowset:

```
Local Message &MSG;
Local Document &DOC;

&MSG = CreateMessage(Operation.PURCHASE_ORDER);
&DOC = &MSG.GetDocument();

/* Get Rowset */
&Rowset = &DOC.GetRowset();

/* populate rowset like any other rowset

/* update document with popualted rowset */
&nRet = &DOC.UpdateFromRowset(&Rowset);

If (&nRet) = True Then
    %IntBroker.Publish(&MSG);
End-If;
```

Populating Message Segments with Documents

The following example shows code for populating message segments with documents.

After you code to populate a segment, set the following statement to *NULL* to release memory:

```
&DOC = null;
```

Then, set the following statement to *TRUE* to manage memory and guarantee that only one segment is in memory at a given time:

```
&DOC = &MSG.GetDocument(true);
```

If you do not following these coding guidelines, memory will get filled with data from all segments in the message.

The previous statements are in emphasis in the following example:

```
Declare Function PopulateDocument PeopleCode QE_FLIGHTDATA.QE_ACNUMBER FieldFormula⇒
;

Local Document &DOC;

&MSG = CreateMessage(Operation.FLIGHTPLAN_DOC);

/*pass in true to get ownership of the object*/
/
&DOC = &MSG.GetDocument(true);

/*popualte the docment with data */
PopulateDocument(&DOC, 1);

/*create a new segment */
&MSG.CreateNewSegment();

/* null out object to release memory */
&DOC = null;&DOC = &MSG.GetDocument(true);
PopulateDocument(&DOC, 2);
&MSG.CreateNewSegment();&DOC = null;
&DOC = &MSG.GetDocument(true);
PopulateDocument(&DOC, 3);

/* publish segmented Message (3 segments) */
%IntBroker.Publish(&MSG);
```

Retrieving Document Data

This section discusses and provides code examples for how to:

- Retrieve document data from the Message object.
- Retrieve document data from message segments.
- Retrieve document data within a Notification event using message segments

Retrieving Document Data from the Message Object

The following code provides an example of how to retrieve a document from the Message object:

```
Local Message &MSG;
Local Document &DOC;
```

```

Local Primitive &PRIM;
Local Compound &COM, &COM_ID, &COM_BILL, &COM_SHIP, &COM_ITEM;
Local Collection &COL_ITEM;

&MSG = CreateMessage(Operation.PURCHASE_ORDER);
&DOC = &MSG.GetDocument();
&COM = &DOC.DocumentElement;

&COM.GetPropertyByName("LanguageCode").Value = "ENG";

/* Populate TransactionID Compound */
&COM_ID = &COM.GetPropertyByName("TransactionId");
&COM2.GetPropertyByIndex(1).value = "KAC";
&COM2.GetPropertyByIndex(1).value = "12345678";

/* Populate BillTo Compound */
&COM_BILL = &COM.GetPropertyByName("BillTo");
&COM5.GetPropertyByName("name").Value = "RobbyNash";
&COM5.GetPropertyByName("number").Value = 713;
&COM5.GetPropertyByName("street").Value = "High Wind";
&COM5.GetPropertyByName("unit").Value = "";
&COM5.GetPropertyByName("city").Value = "Paia";
&COM5.GetPropertyByName("state").Value = "Maui HI";
&COM5.GetPropertyByName("zipcode").Value = "96779";

/* Populate item_collection Collection (2 rows) */
&COL_ITEM = &COM.GetPropertyByName("item_collection");

&COM_ITEM = &COL_ITEM.CreateItem();
&PRIM = &COM_ITEM.GetPropertyByName("item");
&PRIM.Value = "mast";
&PRIM = &COM_ITEM.GetPropertyByName("sku");
&PRIM.Value = "123322";
&PRIM = &COM_ITEM.GetPropertyByName("price");
&PRIM.Value = 300;
&PRIM = &COM_ITEM.GetPropertyByName("quantity");
&PRIM.Value = 12;
&nRet = &COL_ITEM.AppendItem(&COM_ITEM);

&COM_ITEM = &COL_ITEM.CreateItem();
&COM5.GetPropertyByName("item").Value = "boom";
&COM5.GetPropertyByName("sku").Value = "123334";
&COM5.GetPropertyByName("price").Value = 270;
&COM5.GetPropertyByName("quantity").Value = 10;
&nRet = &COL_ITEM.AppendItem(&COM_ITEM);

%IntBroker.Publish(&MSG);

```

Retrieving Document Data from Message Segments

The following code example shows an example of retrieving document data from message segments. As discussed elsewhere in this section, the example shows setting the following statement to *NULL* :

```
&DOC = Null;
```

Setting the statement to *NULL* clears memory between segment loops:

```

import PS_PT:Integration:INotificationHandler;

class DOCUMENT TESTER implements PS_PT:Integration:INotificationHandler
  method FLIGHTDATA();
  method OnNotify(&MSG As Message);
end-class;

/* constructor */
method FLIGHTDATA
end-method;

method OnNotify

```

```

/+ &MSG as Message +/
/+ Extends/implements PS_PT:Integration:INotificationHandler.OnNotify +/
/* Variable Declaration */

Local Rowset &rs;
Local Document &DOC;
Local Record &FLIGHTDATA, &REC;
Local integer &i;

/* get each segment of data via a Document and proces it */

For &i = 1 To &MSG.SegmentCount

    /* null out object to release memory */
    &DOC = Null;
    &MSG.GetSegment(&i);

    /* pass true to GetDocument method to take ownership of object */&DOC = &MSG.⇒
    GetDocument( True);

    /* process Document data for each segment */

End-For;

end-method;

```

Retrieving Document Data within a Notification Event Using Message Segments

The following code example demonstrates how to retrieve document data within an Notification event using message segments.

As discussed elsewhere in this section, the example shows setting the following statement to *NULL* :

```
&DOC = Null;
```

Setting the statement to *NULL* clears memory between segment loops:

```

For &i = 1 To &MSG.SegmentCount
    &DOC = Null;
    &MSG.GetSegment(&i);
    &DOC = &MSG.GetDocument();

    &COM = &DOC.DocumentElement;

    &str = &COM.GetPropertyByName("LanguageCode").Value;

    &COM_ID = &COM.GetPropertyByName("TransactionId");
    &str = &COM_ID.GetPropertyByIndex(2).Value;

    &COM_BILL = &COM.GetPropertyByName("BillTo").Value;
    &str = &COM_BILL.GetPropertyByName("name").Value;

    &COL_ITEM = &COM.GetPropertyByName("item_collecion");

    For &j = 1 To &COL_ITEM.count

        &COM_ITEM = &COL_ITEM.GetItem(&j);
        &str = &COM_ITEM.GetPropertyByName("item").Value;

    End-For;
End-For;

```

Sending and Receiving Binary Data

This section discusses how to:

- Send binary data.
- Receive binary data.

Understanding Sending and Receiving Binary Data

PeopleSoft supports the MTOM protocol for sending and receiving binary data using service operations. While you can send and receive binary data using SOAP, doing so requires that you Base64-encode the data, which can increase message size by 33 percent or more. The MTOM protocol enables you to send and receive binary data in its original binary form, without any increase in size due to encoding.

Whether sending or receiving MTOM-encoded binary data, you use message segments to store the data. The `SegmentContentType` property of the `Message` object is used to set or read the content type of each message segment.

Sending MTOM-Encoded Binary Data

This section discusses how to send MTOM-encoded binary data and discusses how to:

- Set target connector properties to send MTOM-encoded binary data.
- Develop messages to send MTOM-encoded binary data.

Setting Target Connector Properties to Send MTOM-Encoded Binary Data

When sending MTOM-encoded binary data, you must use the HTTP target connector. The HTTP target connector features an MTOM property that you must set to *Y* for MTOM encoding to occur. When you set the MTOM property to *Y*, the HTTP target connector attempts to convert all outgoing message to the MTOM wire format.

See “Using the HTTP Target Connector” (Integration Broker Administration).

Developing Messages to Send MTOM-Encoded Binary Data

An outgoing MTOM message is composed of a SOAP message and one or more sets of binary data. Segments are used to add the binary data to the outgoing request.

For each chunk of data, use a single segment as follows:

1. Create the segment.
2. Copy the data to the segment.
3. Add the MIME type that is to appear for the MIME part containing the binary in the outgoing MTOM wire message.
4. Set the content transfer encoding to *binary*.

In PeopleCode this appears as:

```
&theMessage.CreateNextSegment();

If (&theMessage.SetContentString(&dataString)) Then
    &theMessage.SegmentContentType = "image/jpeg";
    &theMessage.SegmentContentTransfer = %ContentTransfer_Binary;
End-If;
```

The SetContentString method requires character data, and is not capable of passing binary data. For MTOM, pass in a Base64-encoded string that contains the binary data. The File object method GetBase64StringFromBinary allows a binary file to be read in and captured as a string; use this string to set the data for the newly created segment.

See “SetContentString” (PeopleCode API Reference), “GetBase64StringFromBinary” (PeopleCode API Reference).

When seen on the wire, the SOAP XML in the MIME multipart message contains xop:Include references. These references point to the MIME parts that contain the binary data. In order to be able to construct these references, Integration Broker requires that a specific XML element, PsftXopInclude, is present in the outgoing message.

Each PsftXopInclude element corresponds directly to an xop:include in the outgoing wire message, and therefore each PsftXopInclude element logically corresponds to an instance of binary data. Placement of the PsftXopInclude element in the XML is application-specific; Integration Broker does not require any particular location.

In the following example the first instance of the PsftXopInclude element corresponds to the logical point to include an image and the second PsftXopInclude element corresponds to the logical point to include a binary document:

```
<?xml version='1.0'?>
<JobApplication>
  <Photo name='JohnSmith'>
    <PsftXopInclude SegmentNumber='1' />
  </Photo>
  <Resume name='JohnSmithCV'>
    <PsftXopInclude SegmentNumber='2' />
  </Resume>
</JobApplication>
```

The value of the SegmentNumber attribute is used by Integration Broker to link the PsftXopInclude entry to a specific segment used to add the data. For the purposes of MTOM, the first segment used to add binary data is considered to be number 1, the second segment, number 2, and so on. Care should be taken when setting these values as Integration Broker does not check to ensure that they are correct; they are used as-is to build the xop:include references in the wire message.

In the previous example, the message data is not SOAP-wrapped. You can choose to build your own SOAP wrapper or elect to have Integration Broker SOAP-wrap the message. If Integration Broker is to SOAP wrap the message, you must set the HTTP target connector property SOAPUpContent to Y.

See “Using the HTTP Target Connector” (Integration Broker Administration).

An example of XML to use this feature is as follows:

```
<?xml version="1.0"?>
<flt:process xmlns:flt=" http://xmlns.oracle.com/Enterprise/
  Tools/schemas/flightdata.v1">
  <PsftXopInclude/>
  <flt:input1>515</flt:input1>
```

```

    <PsftXopInclude/>
    <flt:input2>664</flt:input2>
</flt:process>

```

You would include the previous XML in the XmlDocument object and add it to the first segment of the message.

The additional segments include the binary data associated with each declaration. For example:

```

&MSG = CreateMessage(Message.FLIGHTDATA);

&MSG.SetXmlDoc(&xmldoc);

&MSG.CreateNextSegment();
&MSG.SetContentString("your encoded image data");
&MSG.SegmentContentType = "image/gif";
&MSG.SegmentContentTransfer = %ContentTransfer_Binary;

&MSG.CreateNextSegment();
&MSG.SetContentString("your encoded video here")
&MSG.SegmentContentType = "video/mp4";
&MSG.SegmentContentTransfer = %ContentTransfer_Binary;

%IntBroker.Publish(&MSG);

```

The following code example provides another XML example that demonstrates using this feature:

```

Local File &theFile;
Local XmlDocument &theXmlDoc;
Local Message &theMessage;
Local string &theBase64encodedString;

/* note: this example does not have any error handling, in */
/* order to keep the code relatively short and concise.    */

/* create the message, and add the basic XML message data */
/* ----- */

&theMessage = CreateMessage(Operation.QE_FLIGHTPLAN_UNSTRUCT);
Local string &xml;

/* this example requires the SOAPUPContent HTTP Target */
/* connector property to be set to "Y", so that the    */
/* outbound XML will be SOAP wrapped.                  */

&xml = &xml | "<?xml version='1.0'?>";
&xml = &xml | "<JobApplication>";
&xml = &xml | "<Photo name='JohnSmith'>";
&xml = &xml | "<PsftXopInclude SegmentNumber='1' />";
&xml = &xml | "</Photo>";
&xml = &xml | "<Resume name='JohnSmithCV'>";
&xml = &xml | "<PsftXopInclude SegmentNumber='2' />";
&xml = &xml | "</Resume>";
&xml = &xml | "</JobApplication>";

&theXmlDoc = CreateXmlDoc(&xml);
&theMessage.SetXmlDoc(&theXmlDoc);

/* add an image to the outgoing message */
/* ----- */

&theFile = GetFile("D:\output\smallPicture.jpg", "R", %FilePath_Absolute);
If &theFile.IsOpen Then
    &theBase64encodedString = &theFile.GetBase64StringFromBinary();
    &theFile.Close();
End-If;

&theMessage.CreateNextSegment();

```

```

If (&theMessage.SetContentString(&theBase64encodedString)) Then
    &theMessage.SegmentContentType = "image/jpeg";
    &theMessage.SegmentContentTransfer = %ContentTransfer_Binary;
End-If;

/* add a PDF file to the outgoing message */
/* ----- */

&theFile = GetFile("D:\output\smallDocument.pdf", "R", %FilePath_Absolute);
If &theFile.IsOpen Then
    &theBase64encodedString = &theFile.GetBase64StringFromBinary();
    &theFile.Close();
End-If;

&theMessage.CreateNextSegment();
If (&theMessage.SetContentString(&theBase64encodedString)) Then
    &theMessage.SegmentContentType = "application/pdf";
    &theMessage.SegmentContentTransfer = %ContentTransfer_Binary;
End-If;

/* send the message */
/* ----- */

%IntBroker.Publish(&theMessage);

```

Note: PeopleSoft currently supports MTOM for asynchronous messaging only.

Related Links

[Working With Message Segments](#)

“SetContentString” (PeopleCode API Reference)

“SegmentContentType” (PeopleCode API Reference)

Receiving Binary Data

This section discusses receiving MTOM-encoded binary data requests and discusses how to:

- Enable listening connectors to receive MTOM-encoded binary data.
- Use PeopleCode to process inbound MTOM-encoded binary data.

Understanding Receiving MTOM-Encoded Binary Data

To receive MTOM-encoded binary data from integration partners, you must use the PeopleSoft services listening connector or the HTTP listening connector.

When a message is received by an MTOM-enabled connector, the gateway first determines if the message is using MTOM. If it is not, the message is processed normally. If MTOM is detected, the gateway extracts the SOAP message from the MIME and then encodes the binary data in the MIME parts. This is effectively a pre-processing step and is done first, before normal processing can occur. Once complete, the SOAP message is then treated no differently from any other SOAP message received. The binary data is Base64 encoded, and is attached to the message in the form of segments.

Enabling Listening Connectors to Receive MTOM-Encoded Binary Data

The following listening connectors can receive and process MTOM-encoded messages:

- PeopleSoft services listening connector.
- HTTP listening connector.

You must enable these connectors for receiving and processing MTOM messages for any MTOM processing to occur. You enable these properties in the integration gateway properties file. The properties appear the MTOM Enable ListeningConnectors section as shown in the following example:

```
# MTOM Enable ListeningConnectors
#
#ig.MTOM.enablePeopleSoftServiceListeningConnector=true
#ig.MTOM.enableHttpListeningConnector=true
```

By default the properties are not enabled and are commented out.

To enable a given connector, remove the comment (#) and ensure that the property is set to *true*.

Note: When these properties are enabled there is a slight performance degradation to all non-MTOM requests sent to the connectors. The degradation is a result of system process that takes place to determine if requests are MTOM-encoded messages.

Using PeopleCode to Process Inbound MTOM–Encoded Binary Data

MTOM messages are processed in the form of message segments. The system processes inbound MTOM requests in two general steps:

- Process the XML data contained in the first segment.
- For each subsequent segment, process the binary data.

The first segment contains the XML data. The xop:include references in the XML are replaced with PsftXopInclude elements, and each instance will point to the segment containing the associated binary data.

The structure of this XML is application-specific, and therefore processing of this XML cannot be easily generalized. You may be able to use the location of the PsftXopInclude elements in the XML to derive information about the binary data segments.

Consider the following inbound MTOM request example:

```
<?xml version='1.0'?>
<JobApplication>
  <Photo name='JohnSmith'>
    <PsftXopInclude SegmentNumber='2' />
  </Photo>
  <Resume name='JohnSmithCV'>
    <PsftXopInclude SegmentNumber='3' />
  </Resume>
</JobApplication>
```

In this example, the XML has been structured such that the parent element contains a *name* value for the associated binary content. A more complete XML might also contain information such as file type, size, or creation date. Again, the structure of this XML is not necessarily determined by Integration Broker, but rather by the design of the application itself.

All segments after the first contain the Base64–encoded binary data. This data is accessible as a string. Processing of this is also application-specific. Some applications may decide to store the encoded string for later use, while others may wish to decode it immediately.

To process the string immediately, use the PeopleCode File object method `WriteBase64StringToBinary` to decode the string and to write it out as a byte array to a file. Once the method has completed and the file closed, the file can be accessed as any other file on the file system.

See “`WriteBase64StringToBinary`” (PeopleCode API Reference).

The following code example shows how to use PeopleCode to process an inbound MTOM request:

```
import PS_PT:Integration:INotificationHandler;

class MTOM_CLASS implements PS_PT:Integration:INotificationHandler
    method MTOM_CLASS();
    method OnNotify(&MSG As Message);
    method getFileExtensionForContentType(&contentType As string)
        Returns string;
end-class;

/* constructor */
method MTOM_CLASS
end-method;

method getFileExtensionForContentType
    /* &contentType as String */
    /* Returns String */

    Evaluate &contentType
    When = "image/jpeg"
        Return "jpg"
    When = "application/pdf"
        Return "pdf"
    When-Other
        Return "unk"
    End-Evaluate;
end-method;

method OnNotify
    /* &MSG as Message */
    /* Extends/implements PS_PT:Integration:INotificationHandler.OnNotify */

    /* note: this example does not have any error handling, in */
    /* order to keep the code relatively short and concise. */

    /* Variable Declaration */
    Local integer &i, &j;
    Local string &contentSectionData, &contentSectionType;
    Local File &theFile;
    Local XmlDoc &theXml;

    /* the first section will be XML */
    /* ----- */

    &MSG.GetSegment(1);
    &contentSectionData = &MSG.GetContentString(1);

    &theXml = CreateXmlDoc(&contentSectionData);

    Local array of XmlNode &nodeList;

    /* get all PsftXopInclude nodes, ignore namespaces */
    &nodeList = &theXml.DocumentElement.FindNodes("/*[local-name()='PsftXopInclude']");

    /* all subsequent sections will be binary data */

```

```

/* ----- */

For &i = 2 To &MSG.SegmentCount

    &MSG.GetSegment(&i);
    &contentSectionData = &MSG.GetContentString(&i);

    /* get the type information directly from the segment */
    /* we'll use this to determine the file extension */
    &contentSectionType = &MSG.SegmentContentType;

    Local string &theFileName = "D:\output\";

    For &j = 1 To &nodeList.Len
        If (&nodeList [&j].GetAttributeValue("SegmentNumber") =
            String(&i)) Then

            rem we've found the entry that matches this content section;
            rem use the 'name' attribute from the parent XML element to
            rem get the file name
            rem NOTE - this assumes a particular XML format that may not
            rem be the same for most applications;

            &theFileName = &theFileName | &nodeList [&j].ParentNode.
                GetAttributeValue("name");

        End-If;
    End-For;

    rem build the complete filename, including the extension;
    &theFileName = &theFileName | "." | %This.getFileExtensionForContentType
        (&contentSectionType);

    &theFile = GetFile(&theFileName, "W", %FilePath_Absolute);
    If &theFile.IsOpen Then
        &theFile.WriteBase64StringToBinary(&contentSectionData);
        &theFile.Close();
    End-If;

End-For;

end-method;

```

Note: PeopleSoft currently supports MTOM for asynchronous messaging only.

Related Links

“Using the integrationGateway.properties File” (Integration Broker Administration)

[Working With Message Segments](#)

“WriteBase64StringToBinary” (PeopleCode API Reference)

Using PeopleCode to Manage REST Service Operations

This section discusses how to:

- Use PeopleCode to manage provider REST service operations.
- Use PeopleCode to manage consumer REST service operations.
- Generate fully-qualified URLs for REST resources.

Using PeopleCode to Manage Provider REST Service Operations

This section discusses how to:

- Read document template data and populate response messages.
- Set HTTP response headers.
- Retrieve HTTP response header data.
- Set server-side caching.

Reading Document Template Data and Populating Response Messages

To read document template data and populate provider response messages, use the OnRequest method. You implement the OnRequest method using an application class, specifically using the IRequestHandler application interface.

When the OnRequest event is fired the document template is populated with the values based on the corresponding URI template. You can use the populated primitive values along with the URI Template index to determine the proper response message data to send back to the client. The code snippet below shows a simple example of reading the document template data and populating the response message. Note that one can override the HTTP return code that is sent as part of the response to the client.

```
import PS_PT:Integration:IRequestHandler;

class WeatherData implements PS_PT:Integration:IRequestHandler
    method WeatherData();
    method OnRequest(&MSG As Message) Returns Message;
    method OnError(&request As Message) Returns string;
end-class;

/* constructor */
method WeatherData
end-method;

method OnRequest
    /* &MSG as Message */
    /* Returns Message */
    /* Extends/implements PS_PT:Integration:IRequestHandler.OnRequest */
    /* Variable Declaration */

    Local Document &Doc;
    Local Compound &COM;
    Local Message &response;
    Local XmlDocument &weather_xmldoc;
    Local XmlNode &info, &country, &state, &city, &day, &data, &flightdata;
    Local Rowset &RS;

    /* get populated Document Template */
    &Doc = &MSG.GetURIDocument();
    &COM = &Doc.DocumentElement;

    &weather_xmldoc = CreateXmlDoc("");

    /* populate xmldoc with data from the Document Template */
    &info = &weather_xmldoc.CreateDocumentElement("WeatherInformation");
    &country = &info.AddElement("Country");
    &country.NodeValue = &COM.GetPropertyByName("country").Value;
    &state = &info.AddElement("State");
    &state.NodeValue = &COM.GetPropertyByName("state").Value;
    &city = &info.AddElement("City");
    &city.NodeValue = &COM.GetPropertyByName("city").Value;
    &day = &info.AddElement("Day");
```

```

        &day.NodeValue = &COM.GetPropertyByName("day").Value;

/*  determine HTTP method that was invoked to determine proper response
/*  message */
If &MSG.HTTPMethod = %IntBroker_HTTP_GET Then

    &data = &info.AddElement("Forecast");
    &data.NodeValue = "55 degrees and raining";
    &response = CreateMessage(Operation.WEATHERSTATION_GET,
        %IntBroker_Response);
    &response.SetXmlDoc(&weather_xmldoc);

End-If;

If &MSG.HTTPMethod = %IntBroker_HTTP_DELETE Then

    &data = &info.AddElement("Forecast");
    &data.NodeValue = "deleted";
    &response = CreateMessage(Operation.WEATHERSTATION_DELETE,
        %IntBroker_Response);
    &response.SetXmlDoc(&weather_xmldoc);

End-If;

Return &response;
end-method;

method OnError
/+ &request as Message +/
/+ Returns String +/
/+ Extends/implements PS_PT:Integration:IRequestHandler.OnError +/
Local Message &Fault_Msg;
Local Document &fault_doc;
Local Compound &COM;

If &request.HTTPMethod = %IntBroker_HTTP_GET Then

    &Fault_Msg = CreateMessage(Operation.WEATHERSTATION_GET,
        %IntBroker_Fault);
    &fault_doc = &Fault_Msg.GetDocument();

    &COM = &fault_doc.DocumentElement;
    &COM.GetPropertyByName("fault_data").Value = &request.IBException.
        ToString();

    Return &fault_doc.GenXmlString();
End-If;

Return "";

end-method;

```

Setting HTTP Response Headers

Use the LoadRESTHeaders method of the IBInfo class to load the response headers defined on the routing for a REST-based service operation. Once loaded, the headers can be modified without specifying the connector override property.

The code snippet below shows how to add HTTP response headers to the any REST based service operation response within the OnRequest event.

```

&response = CreateMessage(Operation.WEATHERSTATION_GET, %IntBroker_Response);

&bRet =    &response.IBInfo.LoadRESTHeaders();

/* any/ modify additional Headers not defined on Routing */
&bRet = &response.IBInfo.IBConnectorInfo.AddConnectorProperties

```

```

        ("Content-Language ", "eng ", %HttpHeader);

Return &response;

```

Retrieving Response HTTP Header Data

You can use the REST method type Head to retrieve meta-information written in response HTTP headers, without having to transport the entire content.

The REST-based service operation created with a method of HEAD does not have a request or response message.

You can assign the OnRequest handler used for the GET method to the service operation to check if the method type is HEAD and, if so, simply send back the HTTP response headers.

The following code snippet shows how to use the OnRequest method to retrieve HTTP response headers

Note: HTTP response headers can be sent back to the client for all REST method types.

```

If &MSG.HTTPMethod = %IntBroker_HTTP_HEAD Then

&response = CreateMessage(Operation.WEATHERSTATION_HEAD,
    %IntBroker_Response);

&bRet = &response.IBInfo.LoadRESTHeaders();

/* any additional Headers not defined on Routing */
&bRet = &response.IBInfo.IBConnectorInfo.AddConnectorProperties
    ("Content-Language ", "eng ", %HttpHeader);

&bRet = &response.IBInfo.IBConnectorInfo.AddConnectorProperties
    ("WWW-Authenticate", "Basic", %HttpHeader);

Return &response;
End-If;

```

Setting Server-Side Caching

For provider REST GET service operations you can set server-side caching by setting the SetRESTCache method on the Message object in the OnRequest PeopleCode event. The SetRESTCache method takes a future Date Time object.

If you set server-side caching the system caches the entire transactional data for the specific URI resource. Subsequent requests from a client with an identical resource will result in the data being pulled from memory/file cache.

At any time you can delete the cache by calling the DeleteRESTCache method on the IntBroker PeopleCode object. The DeleteRESTCache method takes the service operation and service operation version as input variables.

Using PeopleCode to Manage Consumer REST Service Operations

This section discusses how to:

- Invoke a consumer REST service operation.
- Add REST HTTP connector headers.

Invoking a Consumer REST Service Operations

To invoke a consumer REST service operation, the message is instantiated and then the document template is retrieved and populated. The URI index is selected and a SyncRequest method is invoked. The response message contains the HTTP return code. Processing of the data is the same as any other SyncRequest method. In the case of an error, if the User Exception option is selected on the routing, you can attempt to read the fault if defined on the service operation. If the HTTP response code is the same as that defined on the fault message, then the fault message is created and returned. You can read the fault in the document, if the fault message is a Document message type. The message property IsFault is read to determine if a fault message was created.

The code example shows a simple example of populating the document template data and entering the URI resource index to use and invoking the SyncRequest method.

The GetURIDocument method of the Message class is used to retrieve the URI for the REST based on the specified index. The URIResourceIndex property of the Message class is used to set or return the index for the URI as an integer. This index corresponds to the row number in the URI grid of the REST Resource Definition section of the service operation definition.

```

Declare Function out_BI_results PeopleCode QE_FLIGHTDATA.QE_ACNUMBER
    FieldFormula;

&MSG = CreateMessage (Operation.MAPS_GET);

/* Get URI Document and populate with data */
&DOC = &MSG.GetURIDocument();

&COM = &DOC.DocumentElement;

&COM.GetPropertyByName("MapType").Value = "topographic";
&COM.GetPropertyByName("Scale").Value = "1:63";
&COM.GetPropertyByName("Planet").Value = "Earth";
&COM.GetPropertyByName("Country").Value = "USA";
&COM.GetPropertyByName("City").Value = "WhiteSalmon";
&COM.GetPropertyByName("Name").Value = "MainSteet";

/* Set URI Resource Index to be used */
&MSG.URIResourceIndex = 1;
&return_message = %IntBroker.SyncRequest(&MSG);

/* Get return data and display */

If &return_message.ResponseStatus = %IB_Status_Success Then

    /* if xml is returned can use XmlDoc */
    &xmldocReturn = &return_message.GetXmlDoc();
    out_BI_results(&xmldocReturn.GenXmlString());

    /* or if the data returned is JSON */
    Local JsonParser &parser = CreateJsonParser();
    Local boolean &status = &parser.Parse(&return_message.GetContentString());
    Local JsonObject &jObj = &parser.GetRootObject();
    out_BI_results(&jObj.ToString());

/* Read Response Headers if set */
For &i = 1 To &MSG.IBInfo.IBConnectorInfo.GetNumberOfConnectorProperties()

    If &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesType(&i) =
        %HTTPHeader

    Then

        &name = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesName(&i);
        &value = &MSG.IBInfo.IBConnectorInfo.GetConnectorPropertiesValue(&i);
    End-If;

```

```

End-For;

Else

  If &return_message.IsFault = True Then

    &Fault_Doc = &return_message.GetDocument();
    &COM = &Fault_Doc.DocumentElement;
    out_BI_results(&COM.GetPropertyByName("fault_data").Value);

  Else
    out_BI_results(&return_message.IBException.ToString());
  End-If;

End-If;

```

Adding REST HTTP Connector Headers

Use the `LoadRESTHeader` method of the `Message` class to add HTTP header properties not defined on the routing for the service operation.

The code snippet below shows how to modify HTTP headers using `PeopleCode`

Note: The connector override flag in `PeopleCode` does not need to be set in this case.

No HTTP properties are currently applicable for REST and will be removed by the Integration Broker framework.

```

&request = CreateMessage(Operation.MAPS_GET);

&bRet = &request.LoadRESTHeaders();

/* add any additional Headers not defined on Routing */
&bRet = &request.IBInfo.IBConnectorInfo.AddConnectorProperties
  ("Content-Language ", "eng ", %HttpHeader);

```

Related Links

“JsonBuilder Class” (PeopleCode API Reference)

“JsonBuilder Class Methods” (PeopleCode API Reference)

Generating Fully-Qualified URLs for REST Resources

In most REST-based services, representations are hypermedia documents that contain not just data, but links to other resources.

Use the `GetUrl` method contained in the `%IntBroker` class to generate fully-qualified URLs for REST service operation resources. You can use the URLs with defined HTML definitions to dynamically add REST-based web service URL links.

Note: A provider or a consumer REST based service operation representation can be used to generate the fully-qualified link(s).

The syntax of the `GetUrl` method is:

```

string &str = %IntBroker.GetURL( string <Service Operation>, integer
<Resource Index of Service Operation>, document <Document object
defined for document Template> , <optional> bool <secure/ unsecure
REST tgt location>, <optional> bool <add encoding for unsafe characters >

```


The following example shows within an implementation (OnRequest event) of a REST-based provider service, HTML is generated using links defined from other REST-based service operations.

```
method OnRequest

Local Document &Doc_Tmpl, &DOC;
Local Compound &COM_Tmpl, &COM;
Local Message &response;
Local string &STR, &STR1, &STR2, &STR3, &STR4, &strHTML;
Local boolean &bRet;

&response = CreateMessage(Operation.WEATHERSTATION_GET, %IntBroker_Response);

/* read URI Document to get parms out from the request*/
&Doc_Tmpl = &MSG.GetURIDocument();
&COM_Tmpl = &Doc_Tmpl.DocumentElement;

/* Instantiate a Document object based on the REST based Service */
/* Operations Document Template for which to create a link. */

&DOC = CreateDocument("Weather", "WeatherTemplate", "v1");
&COM = &DOC.DocumentElement;

/* based off the data from the request populate the Document object */

If &COM_Tmpl.GetPropertyByName("state").Value = "Washington" Then
    &COM.GetPropertyByName("state").Value = "Washington";

    /* call new method to create fully qualified URL(s) */

    &COM.GetPropertyByName("city").Value = "WhiteSalmon";
    &STR = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);

    &COM.GetPropertyByName("city").Value = "Troutlake";
    &STR1 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);

    &COM.GetPropertyByName("city").Value = "Yakima";
    &STR2 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);

    &COM.GetPropertyByName("city").Value = "Lyle";
    &STR3 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);

    /* use these URLs as bind variables for the HTML definition */
    &strHTML = GetHTMLText(HTML.WEATHER_CITIES, &STR, &STR1, &STR2, &STR3);

    /* set the data in the response message */
    &bRet = &response.SetContentString(&strHTML);

End-If;

Return &response;
end-method;
```

Using the Entity Registration Page

Use the Entity Registration Page to add external Entities and validate them.

To access the Entity Registration Page, navigate to **PeopleTools > Integration Broker > Integration Setup > External Entity Registration**.

This example illustrates the fields and controls on the Entity Registration Page. You can find definitions for the fields and controls later on this page.

The screenshot shows the 'Entity Registration Page' with the following components:

- Entity Limit:** A text input field.
- Disable Entity Check:** A checkbox.
- PeopleTools Section:**
 - Header: PeopleTools
 - Buttons: Personalize, Find, and icons for list and grid views.
 - Navigation: First, 1 of 1, Last.
 - External Entity: A text input field with '+' and '-' buttons.
- PeopleSoft Section:**
 - Header: PeopleSoft
 - Buttons: Personalize, Find, and icons for list and grid views.
 - Navigation: First, 1 of 1, Last.
 - External Entity: A text input field with '+' and '-' buttons.
- User Defined Section:**
 - Header: User Defined
 - Buttons: Personalize, Find, and icons for list and grid views.
 - Navigation: First, 1 of 1, Last.
 - External Entity: A text input field with '+' and '-' buttons.

Field or Control	Description
Entity Limit	Use this field to set the Entity limit.
Disable Entity Check	Select or clear this check box to disable or enable the verification of the Entity against the Entity Registration table.
PeopleTools External Entity	Use this field to add or update PeopleTools Entities. Note: This field is updated by the PeopleTools Team.
PeopleSoft External Entity	Use this field to add or update PeopleSoft Applications Entities. Note: This field is updated by the PeopleSoft Applications Team.
User Defined External Entity	Use this field to add or update User Defined Entities.

Building Message Schemas

Understanding the Message Schema Builder

The message Schema Builder enables you to build, import, modify and delete XML message schemas.

Note: The terms *message schema*, *XML message schema*, and *schema* are used interchangeably in this topic.

To test message schemas during development, use the Schema Tester utility.

Use the Service Operations - General page to enable runtime validation for a service operation, or use the Service Schema Validation page to enable validation for several service operations at a time.

Related Links

[“Understanding the Schema Tester Utility” \(Integration Broker Testing Utilities and Tools\)](#)

[Understanding Message Schema Validation](#)

[Enabling Runtime Message Schema Validation](#)

Message Schemas

An *XML message schema* describes a model for the arrangement of tags and text in a valid XML document. A schema provides a common vocabulary for a particular application that exchanges documents.

Building, Importing, Modifying and Deleting Message Schemas

You can use the Message Schema Builder to manage message schemas for rowset-based messages in the application database.

Note: You can also use the pages of the Message Builder component to manage rowset-based and nonrowset-based schemas. However, the Message Builder enables you to work with only one message schema at a time, whereas , the Message Schema Builder enables you to perform actions, such as building and deleting message schemas, on multiple messages at a time.

Note: You cannot use the Message Schema Builder to build schemas for message parts or container messages. You must use the Message Builder component to build schemas for these message types.

Rowset-Based Message Schemas

Use the Message Schema Builder to generate, regenerate, view or delete rowset-based message schemas.

You cannot regenerate or delete a rowset-based message schema that is a message part. Part and container schemas are automatically generated at save time so there's no need to explicitly regenerate or delete them.

Nonrowset-Based Message Schemas

Use the Message Schema Builder to import new nonrowset-based schemas into the database, modify existing nonrowset-based message schemas, or delete them.

Schemas for nonrowset-based message parts can be deleted or modified, but message parts should never be without a schema. After deleting a nonrowset-based message part, you should always import or enter a new schema for the message.

Selecting and Viewing Data in the Message Schema Builder

This section discusses how to:

- Select data in the Message Schema Builder.
- View message schema data details.
- View XML message schema code.

Selecting Data in the Message Schema Builder

When you access the Message Schema Builder component (IB_SCHEMABUILD) the Schema Builder page (IB_SCHEMABUILD) displays a search engine to use to search for messages and message schema data with which to work and view.

To access the Schema Builder page, select **PeopleTools > Integration Broker > Service Utilities > Build Message Schemas**.

This example illustrates the fields and controls on the Schema Builder page. You can find definitions for the fields and controls later on this page.

The screenshot displays the 'Message Schema Builder' web interface. At the top, there's a title bar 'Message Schema Builder' and a sub-header 'Message Criteria'. Below this, there are two input fields: 'Message Name:' with a text box and a magnifying glass icon, and 'Owner ID:' with a dropdown menu. Underneath these are two side-by-side panels. The 'Schema' panel has three radio buttons: 'Schema Exists', 'No Schema', and 'Both' (which is selected). The 'Structure' panel has three radio buttons: 'Rowset-based', 'Nonrowset-based', and 'Both' (which is selected). Below these panels is a yellow 'Search' button. At the bottom, there are four buttons: a checked checkbox followed by 'Select All', an unchecked checkbox followed by 'Clear All', 'Build Selected Schemas', and 'Delete Selected Schemas'.

The Schema Builder page provides the following options for searching for data with which to work and view in the application database.

<i>Field or Control</i>	<i>Description</i>
Message Name	(Optional.) Click the Lookup button to locate a message definition with which to work. If you do not select a message name, the search will be based on all message definitions in the application database.
Owner ID	(Optional.) From the Owner ID drop-down list, select the owner ID for the message definition. The owner ID helps to determine the application team that last made a change to a message definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Schema	Select from the following options in the Schema group box: • Schema Exists. Select this option to search message versions for which schemas have been built. • No Schema. Select this option to search message versions for which no schemas have been built. • Both. (Default.) Select this option to search all message versions.
Structure	Select from the following options in the Structure group box: • Rowset-based. Select this option to search for rowset-based message versions. • Nonrowset-based. Select this option to search for nonrowset-based message versions. • Both. (Default.) Select this option to search for rowset-based and nonrowset-based message versions.
Search	Click the button to search the database based on the criteria selected.

Viewing Message Schema Details

When you search for data in the Schema Builder, message detail results appear in the Message Schemas grid.

This example illustrates the Message Schema Builder page. The example shows search results appearing in the Message Schemas grid at the bottom of the page.

Message Schema Builder

Message Criteria

Message Name:

Owner ID:

Schema

☐ Schema Exists

☐ No Schema

☒ Both

Structure

☐ Rowset-based

☐ Nonrowset-based

☒ Both

Message Schemas

[Customize](#) | [Find](#) | [View All](#)

First 1-7 of 7 Last

	Message	Message Version	Rowset-based	Exists	Updated on	Build Results
☐	QE_FLIGHTPLAN	VERSION_1	Yes	Yes	07/06/2009 10:14:28AM	
☐	QE_FLIGHTPLAN_ASYNCCOMBO	VERSION_1	No	No	07/06/2009 10:15:40AM	
☐	QE_FLIGHTPLAN_SYNC	VERSION_1	Yes	No	07/06/2009 10:15:40AM	
☐	QE_FLIGHTPLAN_SYNCCOMBO	VERSION_1	No	No	07/06/2009 10:15:40AM	
☐	QE_FLIGHTPLAN_TRANSFORM	VERSION_1	Yes	No	07/06/2009 10:15:40AM	
☐	QE_FLIGHTPLAN_UNSTRUCT	VERSION_1	No	No	07/06/2009 10:15:40AM	
☐	QE_FLIGHTPLAN_UNSTRUCT_SYNC	VERSION_1	No	No	07/06/2009 10:15:40AM	

☒ [Select All](#)
☐ [Clear All](#)

Field or Control	Description
Message	Message name returned from the search of the application database.
Message Version	Version of the message returned from the search of the application database.
Rowset-based	Indicates the structure of the message. The valid values are: <i>Yes</i>. Indicates that the message is a rowset-based message. <i>No</i>. Indicates that the message is a nonrowset-based message.
Exists	Indicates whether a schema has been built for the message. The valid values are: <i>Yes</i>. A schema has been built for the message. <i>No</i>. A schema has not been built for the message.

Field or Control	Description
Updated On	Timestamp of the last update of the record. A new timestamp displays when a schema is generated or deleted for a message.
Build Results	Displays the results of actions performed on a schema.
Build Selected Schemas	Click the button to build schemas for the selected messages.
Delete Selected Schemas	Click the button to delete schemas that exist for the selected messages.

Viewing XML Message Schema

If a message schema exists for a message, click the message name in the Message Schema grid to view the schema details in the Schema Viewer page (IB_SCHEMABUILD_SEC).

This example illustrates the Schema Viewer page. The example shows schema details for *version 1* of the *QE_FLIGHTPLAN* message definition which is a rowset message.

Message: QE_FLIGHTPLAN . VERSION_1

×

Help

Format Type

☒ XML
☐ JSON

Schema:

```

<?xml version="1.0"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:element name="QE_FLIGHTPLAN"
type="QE_FLIGHTPLAN_TypeShape"/>
  <xsd:complexType name="QE_FLIGHTPLAN_TypeShape">
    <xsd:sequence>
      <xsd:element name="FieldTypes" type="FieldTypes_TypeShape"/>
      <xsd:element name="MsgData" type="MsgData_TypeShape"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="FieldTypes_TypeShape">
    <xsd:all>

```

Return

Note: For easier viewing, highlight the data with your cursor.

Message schemas for rowset-based messages are read-only. You can edit message schemas for nonrowset-based messages.

Building Message Schemas for Rowset-Based Messages

This section discusses how to build message schemas for rowset-based messages.

Building a Message Schema for a Rowset-Based Message

To build a message schema for a rowset-based message:

1. Access the Schema Builder page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Build Message Schemas**).
2. Search the application database for the message or messages for which to build schemas.

See [Selecting Data in the Message Schema Builder](#).

3. Select the check box next to the message or messages for which to build schemas.
4. Click the **Build Selected Schemas** button.

When the schema is built successfully, a timestamp appears in the **Updated On** field and the **Build Results** field displays *Successful Schema Insert*.

Importing Message Schemas for Nonrowset-Based Messages

This section discusses how to import message schemas for nonrowset-based messages.

Importing a Message Schema for a Nonrowset-Based Message

To import schemas for nonrowset-based messages:

1. Access the Schema Builder page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Build Message Schemas**).
2. Use the Message Schema Builder search engine to locate the message for which you want to import a schema.

See [Selecting Data in the Message Schema Builder](#).

3. In the Message Schema grid, click the message name link for the message for which you want to import a schema.
4. Import the schema.
 - Import a schema from a file.

You can import a schema from a file by using the **Upload Schema from File** button and selecting the file to import. After you import the file, the contents displays in the Schema text box.

Note: If you receive the error, “Error retrieving the file from database,” verify that one of the variables PS_FILEDIR or PS_SERVDIR is defined in the system variables on your machine.

See [Understanding Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables](#).

- Direct data entry.

You can also enter the schema directly in the Schema text box.

5. Click the **Save** button.

The Schema Builder page appears.

A timestamp appears in the **Updated On** field and the **Build Results** field displays *Successful Schema Insert*.

Modifying Message Schemas

This section discusses how to modify message schemas.

Note: You can modify the content of message schemas built for nonrowset-based messages only.

To modify a schema, you can edit it directly in the Message Schema Builder, or you can export to make changes.

Modifying a Message Schema

To modify a message schema:

1. Select **PeopleTools > Integration Broker > Service Utilities > Build Message Schemas**.

The Schema Builder search page appears.

2. Locate the message with which you want to work.

See [Selecting Data in the Message Schema Builder](#).

3. In the Message Schema grid, click the message name link.

A new page displays with the message schema populated in a text box.

4. Modify the schema as needed.

- Modify the schema directly in the text box, or
- Modify the schema in the editor of your choice.

Use your cursor to highlight the contents of the text box and use the keyboard command **CTRL + C** to copy the contents of the text box. Paste the contents into your editor using the keyboard command **CTRL + V**. Modify the content as needed. Import the content back into the Message Schema Builder using the instructions described previously in this topic for importing message schemas for nonrowset-based messages.

See [Importing Message Schemas for Nonrowset-Based Messages](#).

5. Click the **Save** button.

The Schema Builder page displays and the **Updated On** field displays the date and time of the modification, and the **Build Results** field displays the results of the new schema build.

Deleting Message Schemas

This section discusses how to delete message schemas.

Understanding Deleting Message Schemas

You can delete message schemas using the Message Schema Builder page in the Message Schema Builder component (IB_SCHEMABUILD) or using the Message Schemas page in the Service Administration component (IB_HOME_PAGE).

Note: The Message Schema Builder page provides more comprehensive capabilities for searching for message schema.

You cannot delete a message schema when the message on which the schema is based is:

- Referenced in a service operation.
- Referenced as a message part in a container message.
- A rowset-based message part.
- A container message.
- Referenced in a provided WSDL document.

Using the Message Schema Builder Page to Delete Message Schemas

When deleting a schema using the Message Schema Builder page use only the **Delete Selected Schemas** button. Do not attempt to delete message schemas by deleting content in the Schema text box in the schema details view; if you save the changes, PeopleSoft Integration Broker will attempt to validate the blank schema at runtime and the validation will fail.

You cannot delete message schemas when the service system status is set to *Production*.

The service system status that is set on the Service Configuration page.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

To delete a message schema:

1. Access the Message Schema Builder page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Build Message Schemas**).

The Schema Builder search page appears.

2. Locate the message with which you want to work.

See [Selecting Data in the Message Schema Builder](#).

The Schema Builder page appears.

3. In the Message Schema section, select the check boxes next to the message names that contain schemas you want to delete.
4. Click the **Delete Selected Schemas** button.

Managing Services

Understanding Managing Services

Services are used to logically group a set of service operations.

For example, if you have a number of service operations that are related to customers, such as those pertaining to customer information, adding customers, updating customers, deleting customers, and so on, you can create a customer web service and then associate the related service operations with that service.

Warning! PeopleSoft delivers two services with PeopleSoft Integration Broker: IB_GENERIC and IB_UTILITY. These services are used internally by the system. Do not delete or modify these services.

Before you can provide or consume services in a PeopleSoft system, you must configure the system for handling services. “Configuring the Integration System to Handle Services” (Integration Broker Administration)

Common Elements Used to Manage Services

<i>Field or Control</i>	<i>Description</i>
Comments	(Optional.) Enter comments about the service or service definition.
Description	Description of the service.
Generate SOAP Template	Click to open the Generate SOAP Template utility. The utility enables you to generate SOAP documents for each service operation in a service for testing purposes. The link appears when working with a SOAP-based service and only if WSDL has been generated for the service. Note that you can use the Provide Web Service link on the Services page to generate WSDL for the service.
Link Existing Operations	Click to add service operations already defined in the system to a service.

Field or Control	Description
Object Owner ID	(Optional.) Indicates the owner of the service. The owner ID helps to determine the application team that last made a change to a service definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Operation Type	Specifies how the service is transmitted. On the Service page this field defines the operation type of the service operation added.
Provide Web Service	Click to launch the Provide Web Services component and export PeopleSoft services as WSDL documents.
Schema Namespace	Provides qualification for attributes and elements within an XML schema document (XSD). The default is <i>http://xmlns.oracle.com/Enterprise/Tools/schemas</i>. The namespace on the message definition defaults to the schema namespace you set as the default on the Service Configuration page. Note: If you change the namespace, all future messages will have the new namespace.
Service	The name of the service.
Service Alias	(Optional.) Overrides the service name and will be the name of the service when the WSDL is provided or exported. The alias enables you to use mixed case in the name.
Service Operation	The name of the service operation to associate with the service. On the Services page, use this field to add new service operations for the current service.
Service Namespace andNamespace	The namespace field on the Service pages provides qualification for attributes and elements within a WSDL document. The value defined in the Service Namespace field in the Service Configuration page is used as the default service namespace on the Services page. The default value is <i>http://xmlns.oracle.com/enterprise/tools/service</i>.

Field or Control	Description
Service System Status	The status that is selected restricts rename, delete, and other administrative actions that users can perform on integration metadata in the Services Administration component. Values are: • <i>Production.</i> • <i>Development.</i> See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).
Target Location	Specifies the URL to be used for service requests. You must define this location before creating services and service schemas.
View WSDL	Click to view WSDL documents in the WSDL repository that have been generated for the service. This link appears only when the service you are viewing is a SOAP-based service.

Accessing and Viewing Service Definitions

This section discusses how to.

- Access service definitions.
- View WSDL documents generated for services.
- View service operation information.
- View messages defined for services.

Accessing Service Definitions

Service definitions appear on the Services page (IB_SERVCEDEFN) in the Service component (IB_SERVCEDEFN).

To access the Services page, select **PeopleTools > Integration Broker > Integration Setup > Service Definitions**.

This example illustrates the Services page. The example shows the service definition for the *IB_EXAMPLES* service.

Services

Service:

IB_EXAMPLES

*Description:

IB Examples.

Comments:

This service contains the following IB examples:

1. XML examples:

a. OutSync XML to 3rd party.

Service Alias:

Object Owner ID:

PeopleTools

*Namespace:

http://xmlns.oracle.com/Enterprise/Tools/services/IB

[Link Existing Operations](#)
[View WSDL](#)
[Provide Web Service](#)

Service Operations

Service Operation:

Operation Type:

Add

Existing Operations

[Customize](#) | [Find](#) | [View All](#) | |

First 1-8 of 8 Last

Operation

Message Links

Operation.Default Version	Description	Active	Operation Type	
IB_EX_MP_NONROWSET_ASYNC.v1	Msg parts nonrowset async.	☒	Asynch	
IB_EX_MP_NONROWSET_SYNC.v1	Msg parts nonrowset sync.	☒	Synch	
IB_EX_MP_ROWSET_ASYNC.v1	Msg parts rowset async.	☒	Asynch	
IB_EX_MP_ROWSET_SYNC.v1	Msg parts rowset sync.	☒	Synch	
IB_EX_SYNC_SOAP.v1	Sync SOAP.	☒	Synch	
IB_EX_SYNC_SOAP_TP.v1	Sync SOAP to 3rd party.	☒	Synch	
IB_EX_SYNC_XML.v1	Sync XML.	☒	Synch	
IB_EX_SYNC_XML_TP.v1	Sync XML to third party.	☒	Synch	


The top of the Service page displays general information about the service, including the name of the service, its description, its alias name, and so on.

Viewing WSDL Documents Generated for Services

Click the **View WSDL** link to display the WSDL Repository page (IB_SERVICEDEFN_SEC). This page provides a summary of all the WSDL documents that are generated for the service, as well as the service operations, request messages, response messages, and fault messages that are contained in each.


Note: Service operations must exist for a service to view WSDL documents for the service.

This example illustrates the WSDL Repository page. The example shows the WSDL in the repository of the *IB_EXAMPLE* service. The example shows that WSDL has been exported for one service operation in the service.

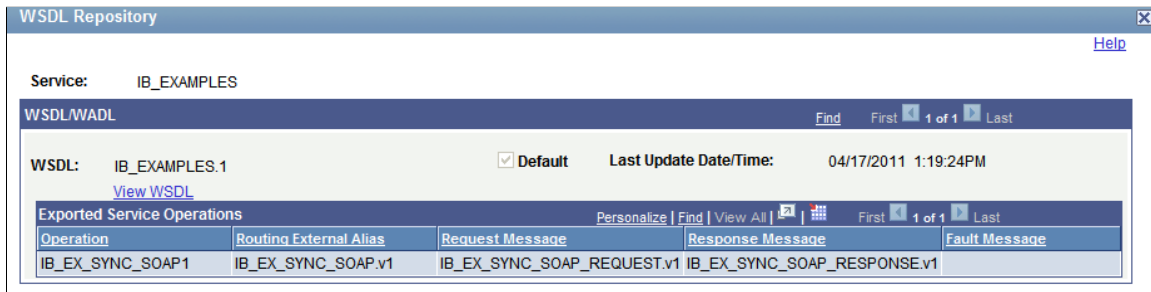

Click the **View WSDL** link on the WSDL Repository page to view the WSDL document in the WSDL Viewer page (IB_SERVICEWSDL_SEC).

This example illustrates the WSDL Viewer page. The example shows the WSDL document for the *IB_EXAMPLES.1*.

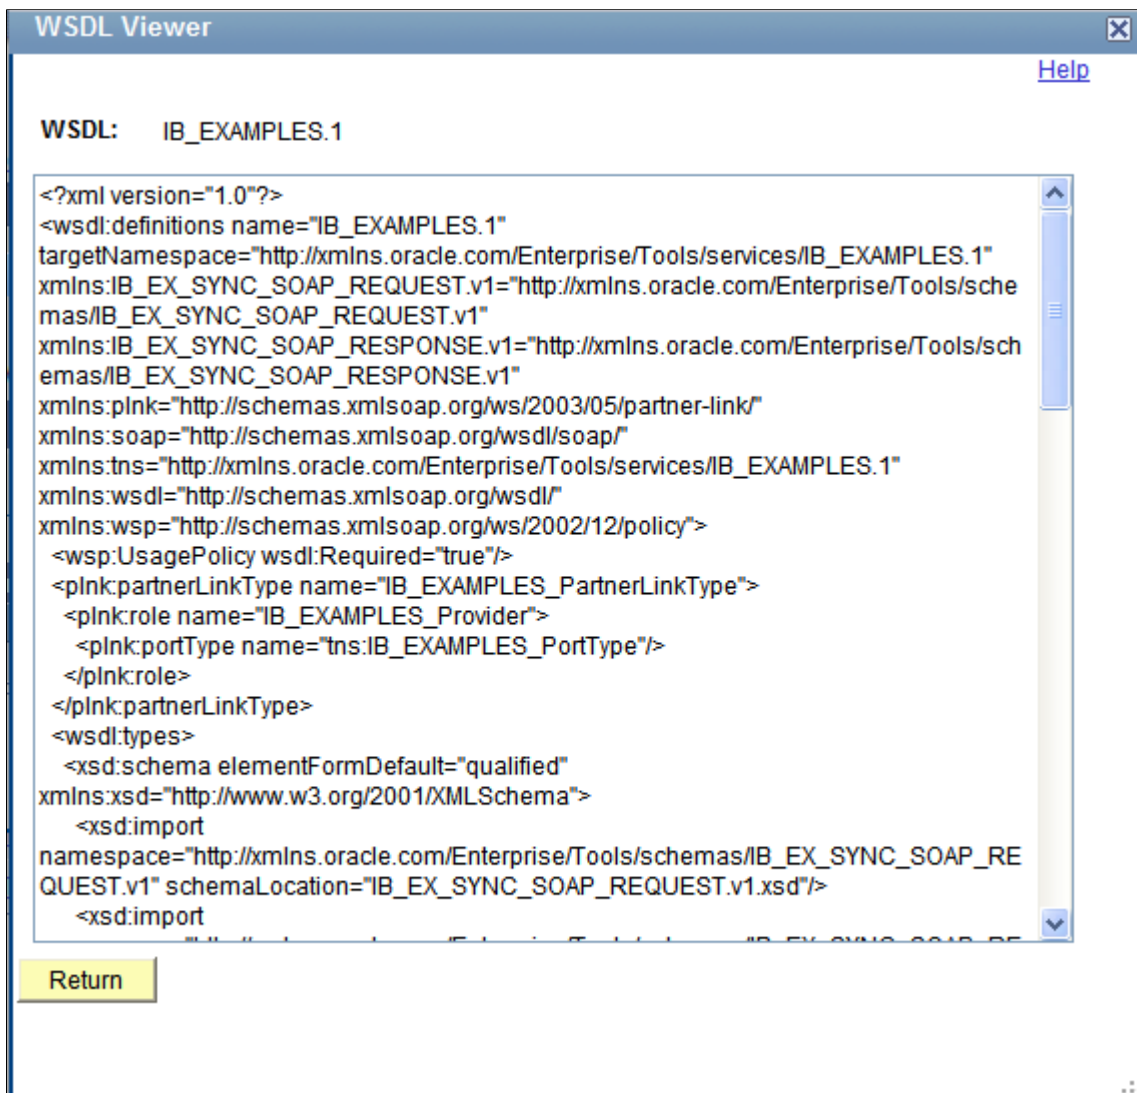

To view a WSDL document generated for a service:

1. Access the service definition. (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**.)
2. Click the **View WSDL** link.

The WSDL Repository page appears.

3. Click the **View WSDL** link.

The document appears in the WSDL Viewer page.

4. Click the **Return** button to return to the WSDL Repository page.
5. Click the **Return** button again to return to the Services page.

Viewing Service Operation Information

The Existing Service Operations section of the Services page contains an Operation tab that displays service operations and service operation versions that are associated with the service. It also displays descriptions of the service operations, the type of operation, and whether the service operation is active.

When you click the name of a service operation, the operation opens on the Service Operations page, where you can view and modify service operations information, work with the service operation handlers, routing definitions, and do much more.

Viewing Messages Defined for Service Operations

The Existing Service Operations section of the Services page contains a Messages Links tab that displays the request and response messages defined for each service operation.

This example illustrates the Existing Service Operations section of the Services page. The example shows the Message Links tab displaying request and response messages for the service operations that are associated with the *IB_EXAMPLES* service

Existing Operations		
Customize Find View All   First 1-8 of 8 Last		
Operation	Message Links	
Request Message.Version	Response Message.Version	
IB_EX_NONROWSET_CONTAINER.v1		
IB_EX_NONROWSET_CONTAINER.v1	IB_EX_NONROWSET_CONTAINER.v1	
IB_EX_ROWSET_CONTAINER.v1		
IB_EX_ROWSET_CONTAINER.v1	IB_EX_ROWSET_CONTAINER.v1	
IB_EX_SYNC_SOAP_REQUEST.v1	IB_EX_SYNC_SOAP_RESPONSE.v1	
IB_EX_GENERIC.v1	IB_EX_GENERIC.v1	
IB_EX_SYNC_XML.v1	IB_EX_SYNC_XML.v1	
IB_EX_GENERIC.v1	IB_EX_GENERIC.v1	

Click the request or response message name to open the message in the Message Definitions page, where you can view and modify message definition information, message schema information, and more.

Adding Service Definitions

This section discusses how to add service definitions to the PeopleSoft system.

Understanding Naming Services and Service Aliases


Service names and service alias names can be exposed as web services. As a result, the following restrictions apply when you name a service or a service alias. Service names and service alias names:

- Cannot begin with *XML*, *xml*, or *Xml*.
- Cannot begin with a digit.
- Cannot begin with a character.

Adding Service Definitions

To add a service definition to the system, use the **Add a New Value** link on the Services search page. To access this page, select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**. Then select the **Add a New Value** link.

This example shows the Add New Service page.

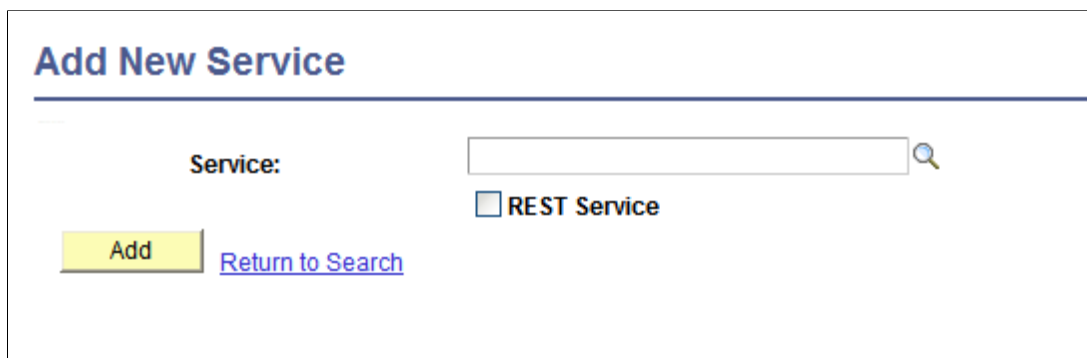

Note: Before you can add a service, you must configure PeopleSoft Integration Broker to handle services using the Service Configuration page.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

After you add a service definition to the system, the Services page (IB_SERVICEDFN) appears where provide additional service definition information.

This example illustrates the Services page. The example shows the definition for a non-REST service called *DEMO_SOAP_SERVICE*.

Services

Service: DEMO_SOAP_SERVICE ☐ REST Service

*Description:

Comments:

Service Alias:

Owner ID:

*Namespace: http://xmlns.oracle.com/Enterprise/Tools/services

[Link Existing Operations](#) [View WSDL](#)

Service Operations	
Service Operation:	Operation Type:
Add	

To add a service definition:

1. Access the Services page (**PeopleTools > Integration Broker > Integration Setup > Service Definitions**).

2. Click the **Add a New Value** link.

3. In the **Service** field, enter a name for the service.

Restrictions for naming services are discussed elsewhere in this section.

See [Understanding Naming Services and Service Aliases](#).

4. Click the **Add** button.

The Services page appears.

5. In the **Description** field, enter a description for the service.
6. (Optional.) If the service is REST-based, select the **Is Provider** check box to define the service as a provider service.

By default, when you add a REST-based service to the system it is a provider service.

7. (Optional.) In the **Comments** field, enter comments about the service or the service.
8. (Optional.) In the **Service Alias** field, enter an alias name for the service.

Restrictions for naming service aliases are discussed elsewhere in this section.

See [Understanding Naming Services and Service Aliases](#).

9. (Optional.) From the **Object Owner ID** drop-down list box, select the owner of the service.
10. In the **Namespace** field, enter a namespace URI for the service.

The default value is the namespace that is declared in the **Service Namespace** field on the Service Configuration page.

11. Click the **Save** button.

Related Links

[Adding Service Operations to Service Definitions](#)

Adding Service Operations to Service Definitions

This section discusses how to:

- Add existing service operations to service definitions.
- Define new service operations for SOAP-based service definitions.
- Define new service operations for REST-based service definitions.

Understanding Adding Service Operations to Service Definitions

You can add a service operation that already exists in the database to a service definition, or you can add and configure a new service operation and then add it to a service.

Adding Existing Service Operations to Service Definitions

To add an existing service operation to a service:

1. Access the Add Existing Operations page (**PeopleTools > Integration Broker > Integration Setup > Service Definitions** and click the **Link Existing Operations** link).

The Add Existing Operations page appears.

2. Select a service operation to add to the service.
 - a. In the **Service Operation** field, enter the name of the service operation to add to the service and click the **Search** button. The service operation appears in the Available Service Operations grid.

Select the check box next to the service operation name.
 - b. In the Service Operation field, click the **Lookup** button. The Look Up Service Operation page appears.

Select a service operation from the list to add to the service.
 - c. Click the **Search** button to show a list of service operations in the database.

Select one or more service operations to add to the service.

3. On the Add Existing Operations page, click the **Save** button.

The Services page appears and the service operations that you added appear in the Existing Operations grid.

4. On the Services page, click the **Save** button.

Defining New Service Operations for SOAP-Based Service Definitions

This section describes how to define new service operations for SOAP-based services.

To add and configure a new service operation for a SOAP-based service:

1. Access the Services page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**).

The Services page appears.

2. In the Service Operations section, locate the **Service Operation** field and enter a name for the new service operation.
3. From the **Operation Type** drop-down list, select the type of service operation you are adding.

The valid values are:

- *Asynch Request/Response.*
- *Asynch to Synch.*
- *Asynch–One Way.*
- *Synchronous.*

Service operation types are discussed elsewhere in the product documentation.

See [Services Operation Types](#).

4. Click the **Add** button.

The Service Operations-Definitions page appears. Use the page to configure the service operation.

See [Configuring Service Operation Definitions](#).

Creating and Managing Integration Groups

This section provides an overview of integration groups and discusses how to:

- Add integration groups.
- Add integration subgroups.

- Add services to integration groups and subgroups.
- Rename and delete integration groups.
- Copy integration groups using Project Copy.

Understanding Integration Groups


PeopleSoft provides you with the ability to create groups and subgroups of integrations that you can then deploy using the Integration Network. Your PeopleSoft integration partners can then use the Integration Network to introspect and activate those integrations on their systems.

You can assign services to one or more integration groups or subgroups. However, there can only be one instance of a service within a group or subgroup assignment.

Adding Integration Groups

To add an integration group to the system, use the Integration Group search page. To access the page select **PeopleTools > Integration Broker > Integration Setup > Integration Group Definitions**.

This example shows the Integration Groups – Add a New Value tab.

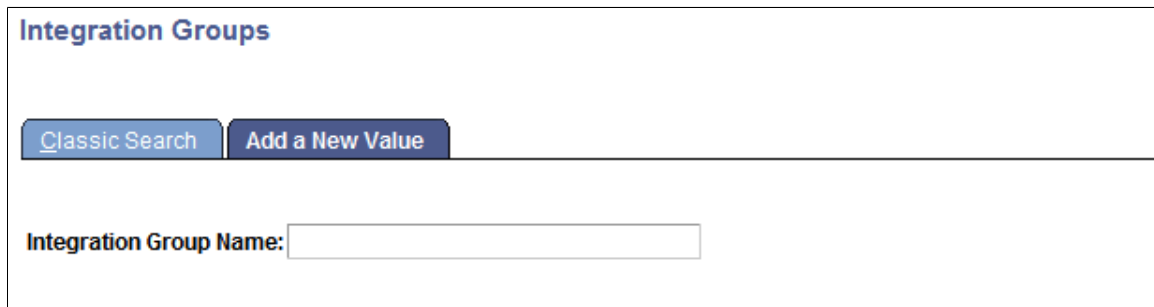

The screenshot shows a web interface titled "Integration Groups". Below the title, there are two buttons: "Classic Search" and "Add a New Value". The "Add a New Value" button is highlighted. Below the buttons, there is a label "Integration Group Name:" followed by a text input field.

After you name the integration group, the Integration Group Definitions page (IB_INTGROUPDEFN) appears where you can add an optional description for the group and save the definition.

This example illustrates the Integration Group Definitions page.

Integration Group Definitions

Integration Group Name DEMO_INTEGRATION_GROUP

***Description**

Object Owner ID

Services Personalize | Find | First 1 of 1 Last

***Service**

[Add Services](#)

Subgroups Find First 1 of 1 Last

Integration Subgroup Name

***Description**

Subgroup Services Personalize | Find | First 1 of 1 Last

***Service**

[Add Services](#)

To add a service integration group:

1. Select **PeopleTools > Integration Broker > Integration Setup > Integration Group Definitions**.

The Integration Group search page appears.

2. Click the **Add a New Value** tab.
3. In the **Integration Group Name** field, enter a name for the integration group.
4. Click the **Add** button.

The Integration Group Definitions page appears.

5. In the **Description** field, add a description for the group.
6. (Optional.) From the **Object Owner ID** field, select the owner of the object.
7. Click the **Save** button.

After you have added the definition to the system you can proceed to add services to the integration group, as well as create integration subgroups and add services to them.

The process for adding services to integration groups and to integration subgroups is identical and is described elsewhere in this section.

See [Adding Services to Integration Groups](#).

Adding Services to Integration Groups

Use the Integration Group Definitions page shown in the previous section to add services to integration groups.

Note: The information presented in this section for searching for services to add to an integration group also applies to searching for services to add to integration subgroups.

You can search for the services to add to a group (or subgroup) by using the **Add Services link** on the Integration Group Definitions page to access the Add Services page (IB_INTGROUP_SEC).

This example illustrates the Add Services page.

Add Services

Service Name

Search

Select	Service
☐	

You can search for a service by entering a partial or complete service name in the Service Name field and then clicking the **Search** button. You can also leave the **Service Name** field blank and click the **Search** button to display a list of all services in the database.

After you locate the service or services to add to the group, select the **Select** check box next to each service name to add to the group and click the **OK** button.

To add services to an integration group:

1. Access the Integration Group Definitions page (**PeopleTools > Integration Broker > Integration Setup > Integration Group Definitions**).
2. Click the **Add Services** link.

The services search page appears.

3. Search for one or more services to add to the integration group, as described previously in this section.
4. Click the **OK** button to return to the Integration Group Definitions page.
5. Click the **Save** button.

Adding Integration Subgroups

The Integration Group Definitions page features a Subgroups section where you define subgroups for an integration group and then add services to the subgroups.

This example shows the Subgroups section of the Integration Group Definitions page. Use this section of the page to add subgroups to an integration group.

To add a service integration subgroup:

1. Access the Integration Group Definitions page (**PeopleTools > Integration Broker > Integration Setup > Integration Group Definitions**).
2. Locate the Subgroup section of the page.
3. In the **Integration Subgroup Name** field, enter a name for the subgroup.
4. In the **Description** field, enter a description for the subgroup.
5. Click the **Add Services** link to add services to the subgroup.

The process for adding services to integration groups and to integration subgroups is identical and is described elsewhere in this section.

See [Adding Services to Integration Groups](#).

6. Click the **Save** button.

To add additional subgroups to the integration group, in the Subgroups section title, click the **Add Row** button (+) to add another subgroups grid to the page and repeat the steps described in this section to define the subgroup and add services to it.

Deleting Services from Integration Groups and Integration Subgroups

To delete a service from an integration group or an integration subgroup:

1. Access the Integration Group Definition page (**PeopleTools > Integration Broker > Integration Setup > Integration Group Definitions**).

2. In the Services or Subgroup Services section of the page, click the **Delete Row** button (-) next to the name of the service to delete.
3. Click the **Save** button.

Renaming and Deleting Integration Groups

This section discusses how to:

- Rename integration groups.
- Delete integration groups.

Understanding Renaming and Deleting Integration Groups

You can rename and delete integration groups using the Integration Groups tab (IB_INTGROUPADM) in the Service Administration component (IB_HOME_PAGE).

The Integration Group tab contains two sections: a Delete section that enables you to delete integration groups and a Rename section that enables you to rename integration groups. When you first access the Integration Groups tab, both sections are collapsed. Click the section header arrow buttons to expand and collapse each section.

This example illustrates the Service Administration – Integration Groups page. The example shows the Delete section and Rename section expanded.

The screenshot displays the 'Integration Groups' tab in the Service Administration component. The page has a top navigation bar with tabs: Messages, Message Schemas, Queues, Routings, Integration Groups (selected), and Deprecated PeopleCode. Below the navigation bar, the 'Service System Status' is set to 'Development'. The main content area is divided into two expanded sections: 'Delete' and 'Rename'.

Delete Section: Contains a search bar for 'Integration Group Name' with a 'Search' button. Below it is a table titled 'Integration Groups' with columns 'Select', 'Integration Group Name', and 'Results'. The table has one row with a checkbox in the 'Select' column. A 'Delete' button is located below the table.

Rename Section: Contains two input fields: 'Integration Group Name' and 'New Name', each with a search icon. A 'Rename' button is located below the 'New Name' field. A 'Results:' label is at the bottom of the section.

The service system status has no impact on renaming or deleting integration groups.

Renaming Integration Groups

To rename and integration group:

1. Access the Service Administration – Integration Groups page (**PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Integration Group Definitions** tab).
2. Click the arrow next to the Rename section header to expand the section.
3. In the **Integration Group Name** field, enter the service to rename, or click the **Lookup** button to search for and select the group to rename.
4. In the **New Name** field, enter the new name for the integration group.
5. Click the **Rename** button.

After you click the **Rename** button, the **Results** field displays a message that the action was successful or displays a warning or error message with a description of the problem.

Deleting Integration Groups

To delete an integration group:

1. Access the Service Administration – Integration Groups page (**PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Integration Group Definitions** tab).
2. Click the arrow next to the Delete section header to expand the section.
3. In the **Integration Group Name** field, enter the integration group to delete, and click the **Search** button. Search results display in the results grid.
4. In the results grid, select the check box next to the integration group or groups to delete.
5. Click the **Delete** button.

Copying Integration Groups Using Project Copy

You can copy integration groups between PeopleSoft databases using Project Copy.

When using Project Copy to copy integration groups select the Integration Groups as one of the definition types. To copy all of the service information, such as service, service operation, handler, and so on, select all of the definitions in the Related Definitions box.

Note: At a minimum you must select Services in the Related Definitions box.

Restricting and Enabling Write Access to Service Definitions

This section provides an overview of restricting access to services and discusses how to:

- Restrict write access to services.
- Enable write access to services.

Note: The information in this section applies to REST and non-REST service definitions.

Understanding Restricting Write Access to Service Definitions

When you restrict write access to a service, sensitive fields of the service definition and of associated service operations appear in read-only mode. The following table lists the components and pages that contain fields and data that are related to services and describes the impact that restricting access to services has to each of them.

<i>Restricted Component or Page</i>	<i>Restriction</i>	<i>Comments</i>
Service	All fields are read-only.	NA
Service Operation	All fields are read-only, with the following exceptions: • User Password Required. • Non-Repudiation. • Runtime Schema Validation.	When a service is restricted, you cannot regenerate routings.
Handlers	All fields are read-only except: • The Status drop-down list box. • The Add a Row button (+) that is used to add new handlers.	When a service is restricted, you can still activate or deactivate handlers.
Routings	All fields are read-only except: • The Inactivate Selecting Routings and Activate Selected Routings buttons. • The Add button.	When a service is restricted, you can: • Activate and deactivate routings of service operations that are associated with the service. • Add new routings to service operations that are associated with the service.

You cannot delete or rename a restricted service. In addition, you cannot change, rename or delete any service operation that is defined as part of a restricted service.

Restricting Write Access to Service Definitions

Use the Service Configuration – Restricted Service page (IB_SVCSETUP3) in the Service Configuration component (IB_SVCSETUP) to restrict a service.

This example shows the Service Configuration – Restricted Services page.

To restrict write access to services:

1. Select **PeopleTools > Integration Broker > Configuration > Service Configuration**. Click the **Restricted Services** tab. The Restricted Services page appears.
2. In the **Service** field, enter a service name and click the **Search** button, or click the **Lookup** button to search for a service.

The service name or search results display in the Services list.

3. Select the **Restricted Service** check box next to the service name to which you want to restrict access.
4. Click the **Save** button.

Enabling Write Access to Service Definitions

This section describes how to enable write access to services that you previously restricted.

To enable write access to services that you previously restricted:

1. Select **PeopleTools > Integration Broker > Configuration > Service Configuration**. Click the **Restricted Services** tab.

The Restricted Services page appears.

2. Select the service to write-enable using one of the following methods:
 - In the **Service** field, enter a service name and click the **Search** button.
 - Click the **Lookup** button to search for a service.
 - Select the **Restricted Services** check box, and click the **Search** button to display and select from all currently restricted services in the system.

The service name or search results appear in the Services list.

3. Deselect the check box next to the service name to write access enable.
4. Click the **Save** button.

Renaming and Deleting Service Definitions

This section discusses renaming and deleting service definitions.

Note: The information in this section applies to REST and non-REST service definitions.

You can rename and delete services using the Services tab in the Service Administration component (IB_HOME_PAGE). The Services tab contains two sections: a Delete section that enables you to delete services and a Rename section that enables you to rename services.

When you first access the Services tab, both sections are collapsed. Click the section header arrow buttons to expand and collapse each section.

This example illustrates the Services Administration – Services page. The example shows the Delete and Rename sections of the page expanded.

The screenshot shows the 'Services' tab in the Service Administration component. The 'Service System Status' is set to 'Development'. The 'Delete' section is expanded, displaying a note: 'Note - Only services with no operations can be deleted.' Below the note is a 'Service:' input field and a 'Search' button. A table titled 'Services' is shown with columns: 'Select', 'Service', 'Description', and 'Results'. The table has one row with a checkbox in the 'Select' column. Below the table is a 'Delete' button. The 'Rename' section is also expanded, showing 'Service:' and 'New Name:' input fields, a search icon, and a 'Rename' button. A 'Results:' label is at the bottom of the 'Rename' section.

Renaming Service Definitions

The service system status that you set on the Service Configuration page affects the ability to rename services.

See “Using the Service Configuration Page to Set Service Configuration Properties” (Integration Broker Administration).

To rename a service:

1. Select **PeopleTools** > **Integration Broker** > **Service Utilities**. Click the **Services** tab.

The Service page displays.

2. Click the arrow next to the **Rename** section header to expand the section.
3. In the **Service** field, enter the service to rename, or click the **Lookup** button to search for and select the service to rename.
4. In the **New Name** field, enter the new name for the service.
5. Click the **Rename** button.

After you click the **Rename** button, the **Results** field displays a message that the action was successful or displays a warning or error message with a description of the problem.

Deleting Service Definitions

You can delete services only when the service has no service operations associated with it. When you search for a service to delete, only such services that have no service operations associated with them are retrieved from the system.

To delete a service:

1. Select **PeopleTools > Integration Broker > Service Utilities**. Click the **Services** tab.

The Service tab displays.

2. Click the arrow next to the **Delete** section header to expand the section.
3. In the **Service** field, enter the service name to delete, and click the **Search** button.
Search results display in the results grid.
4. In the results grid, select the check box next to the service or services to delete.
5. Click the **Delete** button.

Activating and Deactivating Service Definitions in Bulk

This section describes activating and deactivating service definitions in bulk.

Note: The information in this section applies to REST and non-REST service definitions.

The Service Administration – Service Activate/Deactivate page (IB_HOME_PAGE9) in the Service Administration component enables you to activate and deactivate services in bulk.

This page enables you to quickly activate or deactivate services. If any problems occur during activation, the system displays a message indicating a problem activating a certain object, for example routing, handler, and so on. If such a message occurs, you must look at the corresponding object definition to determine the problem. This page is not intended to be used to debug activation problems or problems with integration metadata definitions.

This example shows the Service Administration – Service Activate/Deactivate page.

Level

☒ **Integration Group** Integration Group Name

☒ Show All Subgroups

☐ Filter by Subgroup

☐ No Subgroups

☒ Show Services tied to Group

☐ **Service** Service

Select	Service	Description	Results
☐			

When you activate one or more services, all of the default service operation associated with the services become active. In addition, the handlers, routings and queues associated with the service operations become active as well.

When you deactivate one or more services, all selected services become deactivated. The default service operations for the services become deactivated as well. In addition, the handlers and routing definitions associated with the service operations become deactivated. Queues do not become deactivated, since they can be shared with other service operations.

You can search for services to activate or deactivate by integration group name and related parameters or by service name.

The following controls appear on this page:

Field or Control	Description
Integration Group	(Default.) Select the control to search the database for services to activate or deactivate by integration group. Use one of the following integration group filters: • Show All Subgroups. (Default.) Select the radio button to display all integration subgroups associated with integration groups in the system. • Filter by Subgroup. Select the radio button to search for a specific integration subgroup and enter its name in the field. • No Subgroups. Select the radio button to omit integration subgroups from your search. • Show Services Tied to Group. (Default.) Check the box to include the services tied to an integration group in the search results. By default this option is selected.
Integration Group Name	If searching by integration group, enter the integration group name by which to search or click the Lookup button to search for one.
Service	Select the radio button and enter the name of the service by which to search or click the Lookup button to search for one.
Search	Click the button to search the database for services based on the criteria entered.
Services (grid)	This grid displays the search results and features this controls: • Select. Check the box to select one or more services in the grid to activate or deactivate. • Service. Indicates the name of the service. • Description. Description of the service. • Results. Displays the results of the activate or deactivate action.
Activate	Click the button to activate the services selected in the Services grid.
Deactivate	Click the button to deactivate the services selected in the Services grid.

To activate or deactivate services in bulk:

1. Access the Service Activate/Deactivate page (**PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Service Activate/Deactivate** tab).

2. Search for services to activate or deactivate:

To search by integration group:

- a. Click the **Integration Group** control.
- b. In the **Integration Group Name** field, enter or search for the integration group by which to search.
- c. If appropriate, select additional integration groups filters as described previously in this section.

To search by service in the **Service** field enter or search for the service name by which to search.

3. Click the **Search** button.
4. Select the **Select** check box next to each service to activate or deactivate.
5. Click the **Activate** button to activate the selected services; click the **Deactivate** button to deactivate the selected services.

When the system has performed the selected action, the Results column displays *Success* for each service you activated or deactivated.

Chapter 10

Managing Service Operations

Understanding Managing Service Operations

This section discusses:

- Service operations.
- Service operation types.
- Naming conventions for service operation metadata.
- Service operation aliases.
- Service operation versions.
- Monitoring service operations.

Note: Before you can provide or consume services in a PeopleSoft system, you must configure the system for handling services.

Related Links

“Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration)

Service Operations

A *service operation* definition consists of general information about an operation, such as its name, description, and so on. It also specifies an operation type, which determines how the operation is to be processed, synchronously or asynchronously. In addition, it contains routings, which determine the direction, inbound or outbound, of the service operation. A service operation has one or more handlers, which contain and run the programming logic for sending or receiving the message, manipulating message content, and so on.

Note: Beginning with the PeopleTools 8.48 release, service operations house the processing logic found in messages, transactions and relationships used in earlier versions of PeopleSoft Integration Broker.

Services Operation Types

When you create a web service operation you must specify a service operation type. *Service operation types* determine the type of message processing.

There are four service operation types:

Term	Definition
Asynchronous Request/Response	The sending system invokes a service operation asynchronously and processes the response from the receiving system asynchronously. Unlike a synchronous operation type, the response is not processed on the same thread as the response, and it is processed sometime in the future.
Asynchronous to Synchronous	The sending system's asynchronous process sends a synchronous request to a remote system. The sending asynchronous system expects the receiving system to send a synchronous response back. The sending asynchronous system transforms the response and puts it back in the queue for asynchronous consumption.
Asynchronous – One Way	The service operation is queued and sent in near real-time. Processing on the sending system continues without a response from the receiving system.
Synchronous	The service operation is processed in real-time. Processing on the sending system does not continue until it receives a response from the receiving system.

Naming Conventions for Service Operation Metadata

When naming the following service operation metadata, names cannot start with “xml,” digits or special characters:

- Service operation names.
- Service operation aliases.

Service Operation Aliases

A *service operation alias* or *operation alias* is the service operation name that displays for the service operation when WSDL or WADL is provided.

Service operation aliases may be mixed case.

Duplicate service operation alias names within a service are not allowed.

Service Operation Versions

When you create a service operation, the operation that you create automatically becomes the default service operation version.

If you add a new version to the operation, the newly added version automatically becomes the default. The previous version of the service operation remains in the database as a non-default version and you still may use that the non-default version.

See [Using Non-Default Service Operation Versions](#).

Monitoring Service Operations

This section describes several options for monitoring service operation performance.

Monitoring Service Operations in the Integration Broker Service Operations Monitor

PeopleSoft provides an Integration Broker Service Operations Monitor that enables you to monitor asynchronous and synchronous service operation information, node status, queue status, manage domains, and more, from within the PeopleSoft Pure Internet Architecture.

See the product documentation for [Integration Broker Service Operations Monitor](#).

Monitoring Service Operations in the Integration Network Monitor

The Integration Network provides a Network Monitor that enables you to monitor local integrations and integrations from all remote PeopleSoft nodes defined in the Integration Network.

See “Using the Integration Network Monitor” (Integration Broker Administration).

Monitoring Service Operations in the Integration Network Transactional Tracker

The Integration Network provides a Transactional Tracker that enables you to monitor transactions between the local system and remote PeopleSoft nodes defined in the Integration Network.

See “Using the Integration Network Transactional Tracker” (Integration Broker Administration).

Monitoring Service Operations in Performance Monitoring Tools Using Module and Action Information

Several system monitoring tools report metrics by capturing Module and Action information. On an Oracle database, PeopleSoft provides service operation name and PeopleCode event name as Module name and Action name respectively. On an IBM Db2 database, PeopleSoft provides service operationname as Module name (no Action information is provided for Db2 systems). This information enables you to associate service operations with database transactions for monitoring and troubleshooting.

To enable capturing service operation and PeopleCode event metrics you must set the EnableDBMonitoring option in PSADMIN.

See “Monitoring PeopleSoft MODULE and ACTION Information” (Data Management).

Accessing and Viewing Service Operation Definitions

This section discusses how to:

- Access service operation definitions.
- View service operation definitions.

Accessing Service Operation Definitions

Use the pages in the Service Operations component (IB_SERVICE) to access and view service operation definitions.

The example shows the Service Operations – General page. The example shows the definition for the *QE_FLIGHTPLAN_SYNC* service operation.

General | Handlers | Routings

Service Operation QE_FLIGHTPLAN_SYNC

Operation Type Synchronous

***Operation Description** QE_FLIGHTPLAN_SYNC

Operation Comments

Owner ID

Operation Alias

☐ User/Password Required

***Req Verification** None

[Service Operation Security](#)

☐ Used with Think Time Methods

☐ Conditional Navigation

Default Service Operation Version

***Version** VERSION_1

Version Description

Version Comments

☒ Default ☒ Active

Routing Status

Any-to-Local Does not exist

Local-to-Local Does not exist

Runtime Schema Validation

☐ Request Message

☐ Response Message

☐ Non-Repudiation

Routing Actions Upon Save

☐ Generate Any-to-Local

☐ Generate Local-to-Local

☐ Transactional

Message Information

Type Request

Message.Version QE_FLIGHTPLAN_SYNC.VERSION_1 [View Message](#)

Type Response

Message.Version QE_FLIGHTPLAN_SYNC.VERSION_1 [View Message](#)

To access a service operation definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

The Service Operations– Search page appears.

2. Search for a service operation definition to view.

You can search for an operation in one of two ways:

- Click the **Search** button to display all service operation definitions in the system.
- Enter search criteria in one or more of the following fields, and then click the **Search** button:

Field or Control	Description
Service	Enter the service name that contains the service operation that you want to view, or click the Lookup button to search for and select a service name.
Service Operation	Enter the name of the service operation to view, or click the Lookup button to search for and select an operation.
Operation Type	This search option is for web service operations only. From the Operation Type drop-down list box, select an operation type. Values are: • <i>Asynch Request/Response</i> • <i>Asynch to Synch</i> • <i>Asynchronous – One Way</i> • <i>Synchronous</i>

3. In the Service Operations results grid, click the name of the service operation to view.

The Service Operations – General tab appears with data for the service operation that you selected.

Viewing Service Operation Definitions

The Service Operations component includes three pages:

Field or Control	Description
General Tab	Features general-service and default-service operation information.
Handlers Tab	Provides summary information about handlers that have been added to an operation. Service operation handlers contain the programming logic for sending and receiving service operations and their contained messages, and for manipulating content.
Routings Tab	Provides summary information about service operations routings. Routing definition determine the direction—inbound, outbound or hub—of service operations.

Viewing General Service Operation Information

When you access a service operation (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Operation Definitions**, the Service Operations - General page (IB_SERVICE) appears.

The top portion of this page contains basic information about a service operation, including its name, description, and so on. The **Service Operation Security** link opens the permission list for the service. Note that the Service Operation Security link appears only after a service operation definition is saved.

Note: The Conditional Navigation control is reserved for future use.

The Runtime Schema Validation group box shows if runtime schema validation is selected for the request and response messages.

The Routing Status group box shows if any-to-local, local-to-local, or in the case of feeds, local-to-Atom, routing definitions have been generated for the service operation. Click the Routings tab to view detailed information about routing definitions that exist for a service operation.

The Routing Actions Upon Save group box shows the possible routings that the system can generate when the service operation definition is saved.

The Message Information section displays the request message, response message information, and fault message for the service operation. The **View Message** links in this section open the displayed message on the Message Definition page, where you can view additional information about the message. For messages defined for web services, all service operations with operation types other than Synchronous, the queue to which a message belongs also appears. Click the **View Queue** link or the **Add New Queue** link to open the Queue Definition page to view additional queue definition information or to add or change a queue to which a message belongs.

Viewing Handler Information

To view service operation handler information, click the **Handlers** tab. Doing so displays the Service Operations - Handlers page (IB_SERVICEHDLR) which lists summary information about handlers that have been added to an operation.

This example illustrates the Service Operations – Handlers page.

General | **Handlers** | Routings

Service Operation: QE_FLIGHTPLAN

Default Version: VERSION_1

Operation Type: Asynchronous - One Way

Handlers

Customize | Find | View All | | First 1-3 of 3 Last

*Name	*Type	Sequence	*Implementation	*Status		
GEN_UPG_HANDLER_18802	OnNotify	3	Application Class	Active	Details	+ -
GEN_UPG_HANDLER_21703	OnNotify	1	Application Class	Active	Details	+ -
Test_Handler	On Notify	2	Application Class	Active	Details	+ -

This example shows the Service Operations – Handlers page for an asynchronous service operation, *QE_FLIGHTPLAN*.

The summary information includes the handler name, the handler type, and the implementation method for the handler. The status of the handler, active or inactive, also appears.

Click the **Details** link to open the Handler Details page (IB_SERVICEHDLR_SEC) for the handler.

This example illustrates the Handler Details page.

Handler Details

Handler Name: GEN_UPG_HANDLER_18802
Handler Type: OnNotify
Description: QE_FLIGHTPLAN
Comments:
Handler Owner:
Handler Alias: GEN_UPG_HANDLER_18802

Application Class

***Package Name:** QE_FLIGHTPLAN
***Path:** :
Class ID: FLIGHTPROFILE
Method: OnNotify

The Handler Details page shows additional information about the handler, including the owner and application class or component interface details.

You can also use this page to specify the handler details.

Viewing Routing Information

Click the **Routings** tab to open the Service Operations - Routings page (IB_SERVICERTNGS) to view a summary of routing definitions for an operation.

This example illustrates the Service Operations – Routings page.

General | Handlers | **Routings**

Service Operation: QE_FLIGHTPLAN
Default Version: VERSION_1
Routing Name: Add

Routing Definitions								
Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results
☐	~GEN-UPG-24248	VERSION_1	Asynch	QE_LOCAL	QE_JBTGT	Outbound	Active	

Inactivate Selected Routings Activate Selected Routings

The **Routings Definition** grid on the page lists summary information for routings that are defined for a service operation. Summary information that is displayed includes the routing definition name, service operation version, routing type, sending node, receiving node, direction of the routing and the routing status.

Click a routing definition name to open the routing in the Routing Definitions component, where you can view additional information about the routing.

See [Viewing Routing Definitions in Graphical Format](#).

You can also use this page to add routing definitions to a service operation and to activate or deactivate routings for an operation.

See [Adding Routing Definitions](#), [Activating and Inactivating Routing Definitions](#).

Adding Service Operation Definitions

This section describes how to add web service operation definitions to the PeopleSoft system.

To add a service operation definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

The Service Operations – Search page appears.

2. Click the **Add a New Value** link.
3. In the **Service** field, enter the service name to which the new operation will belong or click the **Lookup** button to search for a service name.
4. In the **Service Operation** field, enter a name for the service operation.
5. From the **Operation Type** drop-down list box, select an operation type. Values are:
 - *Asynchronous – One Way*
 - *Synchronous*
 - *Asynch Request/Response*
 - *Asynch to Synch*
6. Click the **Add** button.

The new definition appears on the General tab of the Service Operation component, and you can now define the service operation.

Configuring Service Operation Definitions

After you add a service operation definition to the system, you can define the service operation.

This section discusses how to:

- Specify general service operation information.
- Define service operation version information.
- Add handlers to service operations.

- Add routing definitions.
- Activate and inactivate routings.

Specifying General Service Operation Information

To specify general service operation information:

1. Access the Service Operations-General page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Operation Definitions**).
2. In the **Operation Description** field, enter a description for the operation.
3. (Optional.) Select the **User ID/ Password Required** check box to require a user ID and password for inbound service operations.

See “Managing User Authentication” (Integration Broker Administration).

4. From the **Security Verification** drop-down list, select the level of security with which inbound integrations must be sent.

See “Validating Security on Inbound Integrations” (Integration Broker Administration).

5. (Optional.) In the **Operation Comments** field, enter comments about the service operation.
6. (Optional.) From the **Object Owner ID** field, select the owner of the definition.

The owner ID helps to determine the application team that last made a change to a service definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.

7. (Optional.) In the **Operation Alias** field, enter an alias name for the service operation.

When working with a web service operation, the general information section of this page includes a **Service Operation Security** link. Granting permissions to service operations is discussed elsewhere in this topic.

Before you can save the service operation definition, you specify messages for the service operation, as described in the next section.

See [Setting Permissions to Service Operations](#).

Defining Service Operation Version Information

When you first create a service operation definition, the definition that you initially define is the default version.

When the newly created service operation definition opens, the **Default** check box is enabled and is read-only.

You can subsequently define additional service operation versions and assign them as the default.

See [Managing Service Operation Versions](#).

Defining General Version Information

To define the service operation default version:

1. Access the Service Operations - General page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**).
2. In the **Version** field, enter a version identifier.

The default is *v1*.
3. (Optional.) In the **Version Description** field, enter a description for the operation version.

If you enter no information, the description by default is the name of the service operation when you save the definition.
4. (Optional.) In the **Version Comments** box, enter comments about the version.
5. (Optional.) Select the **Non-Repudiation** check box to apply nonrepudiation to the message.
6. (Optional.) Select the **Runtime Schema Validation** check box to enable service schema validation at runtime. You can set validation for the request message, response message, or both.

Continue to the next section to specify messages for service operations. You cannot save the service operation definition until you define messages for it.

Specifying Messages for Service Operations

You specify messages for service operations in the Message Information section of the Service Operations – General page.

The messages that you specify define the structure of the data that is contained in the service operation.

The service operation type determines the number of messages and message types (request or response) that you specify.

To specify messages for a service operation:

1. Locate the Message Information section on the Service Operations – General page.
2. Locate the **Type** field, and take note of the message type to define.
3. In the **Message.Version** field, enter the message name followed by a dot and version, or click the **Lookup** button to search for one.

After you select the message, you can click the **View Message** link to view the message.

4. Specify the queue for the message.

Note: If you are defining a message for a synchronous operation type, you do not need to define a queue.

Your options are:

- In the **Queue Name** field, enter the queue name.
- Click the **Lookup** button to search for a queue.

- Click the **Add Queue** link to open the Queue Definitions page and define a new queue for the message.

See [Adding Queue Definitions](#).

- Click the **Multi-Queues** link to open the Queue List page and assign multiple queues to process the message.

The **Multi-Queue** link appears only when you have enabled the multi-queue feature and when you are working with asynchronous service operations.

See [Assigning Multiple Queues to Process Service Operations](#).

5. Repeat steps 1 through 4 for each message type that appears in the Message Information section.
6. Click the **Save** button.

Specifying Fault Messages for Service Operations

You can specify fault messages for service operations for error handling.

Note the following about fault messages:

- You cannot add fault messages to asynchronous service operations.
- Fault messages must be nonrowset-based messages, container messages, or document messages. Fault messages cannot be rowset-based messages.

To specify a fault message:

1. Locate the Default Service Operation Version section on the Service Operations – General tab.
2. Click the **Add Fault Type** button.

A new row appears in which to specify a message. Note that the **Type** field in the new row displays *Fault*.

3. In the **Message.Version** field, enter the message name, or click the **Lookup** button to search for one.

After you select the message, you can click the **View Message** link to view the message.

4. Click the **Save** button.

To delete a fault message, in the Default Service Operation Version section, click the **Delete Fault Type** button. Then click the **Save** button.

Generating Local-to-Local and Any-to-Local Routing Definitions

Use the Service Operations-General page to initiate generating local-to-local and any-to-local routing definitions.

See [Initiating System-Generated Routing Definitions](#).

Adding Handlers to Service Operations

Adding handlers to service operations is discussed elsewhere in the product documentation

See [Understanding Service Operation Handlers](#).

Adding Routing Definitions

This section describes how to create point-to-point service operation routing definitions from the Service Operations – Routing page.

To add a routing to a service operation:

1. Access the Service Operations - Routings page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Operation Definitions** and click the **Routings** tab).
2. In the **Routing Name** field, enter a name for the routing.
3. Click the **Add** button.

The Routing Definition page appears.

Creating and defining a routing is discussed elsewhere in the product documentation.

The next section describes how to activate routings.

Related Links

[Understanding Routing Definitions](#)

[Adding Routing Definitions](#)

Activating and Inactivating Routing Definitions

To activate or inactivate a routing:

1. On the Service Operations component, click the **Routings** tab.
The Routings page appears.
2. Select the check box in the Select column next to the routing definition names that you want to activate or inactivate.
3. Activate or inactivate the routing definition.
 - To activate the routings, click the **Activate Selected Routings** button.
 - To inactivate the routings, click the **Inactivate Selected Routings** button.
4. Click the **Save** button.

Setting Permissions to Service Operations

This section describes how to use the Service Operations component to set permissions to access service operations. You can also set these permission in the Security component.

Understanding Setting Permission to Service Operations

Security operations are secured using permission lists.

When you select the **User/Password Required** check box on the Service Operations-General page, on inbound integrations, your integration partners must supply a valid user ID that is associated with the permission list you specify to invoke service operations.

Setting Permission Access to Service Operations

To grant permissions to service operations:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions** and select a service operation with which to work.

The Service Operations - General page appears.

2. Click the **Service Operation Security** link.

The Web Service Access page appears.

3. In the **Permission List** field, enter a permission list for the service operation, or click the **Lookup** button to search for and select one.
4. From the **Access** drop-down list, select an access level for the service operation. Values are:
 - *Full Access.* (Default.)
 - *No Access.*
5. Click the **Save** button.

Related Links

“Defining Permissions” (Security Administration)

Managing Service Operation Versions

This section discusses how to:

- Create service operation versions.
- Use non-default service operation versions.

Creating Service Operation Versions

The information in this section pertains to REST and non-REST service operations.

When you create a new service operation version, the new version automatically becomes the active default version.

If you have generated WSDL or WADL for the current service operation, after you create the new version you are prompted to generate WSDL or WADL for the new version.

To create a new service operation version:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

Select the service operation with which to work. The Service Operations–General page appears.

2. At the bottom of the page, click the **Add Version** link.

The Service Operation Versions page appears.

3. In the **Service Operations Version** field, enter the new version and click the **OK** button.

The Service Operations Version page appears.

4. Complete the fields as appropriate for the new service operation version.

See [Defining Service Operation Version Information](#).

5. Click the **Save** button.

Note: For REST Consumer Service Operations, you must add the routing definition manually using the routing definition component. The source node should be the default local node and the receiver node should be WADL_NODE.

The new service operation version appears in the Service Operations–General page.

A Non-Default Versions grid appears at the bottom of the page that lists and provides access to the previous service operation version. Note that all versions that display in this grid have a status of *Inactive*.

Using Non-Default Service Operation Versions

PeopleCode processing for service operation handlers takes place on the default service operation version.

To continue using non-default service operation version you must write and apply transformations to transform message shapes contained in the non-default service operation version to the message shapes contained in the default version so that handler processing of the service operation can occur.

You need to write and apply transformations only for the changed message shapes. For example, if a service operation contains request and response messages, but only the request message shape has changed between versions, you need only write and apply a transform program to transform the request message on the request message that is contained in the non-default service operation version to the shape of the request message in the default version.

The non-default versions are inactive until the transformations are entered and the status is changed to Active. Then the grid shows the version with Active.

Attaching Files to Service Operations

This section provides an overview of attaching files to service operations and discusses how to:

- Use the FTP Attachment utility.
- Send attachment information with service operations.
- Process attachment information that is included in service operations.

Understanding Attaching Files to Service Operations

PeopleSoft Integration Broker provides an FTP Attachment Upload utility that enables you to upload attachments from any directory to your FTP server and then provide the location of the attachments in service operation PeopleCode. The attachments can be in any file format, such as text files, EDI files, word processing files, and so on.

As the operation is consumed, you can access these attachments using the attachment API. The recipient can get the necessary information about the attachment and can retrieve it using a URL or file location that you provide.

Note: The FTP Attachment Upload utility does not support uploading attachments from the database. To upload attachments from the database, manually retrieve and copy them to the FTP server.

Using the FTP Attachment Utility

Use the FTP Attachment Upload page in the Files Utilities component (IB_FILEUPLOAD) to upload files to your FTP server for attaching to service operations.

To access the FTP Attachment Upload page, select **PeopleTools > Integration Broker > File Utilities > FTP Attachment Upload**.

This example illustrates the fields and controls on the FTP Attachment Upload page. You can find definitions for the fields and controls later on this page.

FTP Attachment Upload

User:

Password:

FTP Host:

Remote Directory:

File Name Prepend:

Add Attachment

You work with the following page elements:

<i>Field or Control</i>	<i>Description</i>
User	Indicates the user ID of the FTP server.
Password	Indicates the password to the FTP server.
FTP Host	Indicates the machine name of the FTP server.
Remote Directory	Indicates the directory path to the file to upload.
File Name Prepend	Enter text to prepend the file name to build the final file name to copy to the target directory.
Add Attachment	Click to upload the indicated file.

Sending Attachment Information with Service Operations

The following example shows sample PeopleCode for sending attachment information:

```

Local Message &MSG;
Local Rowset &Flight_Profile;
Local String &Attachment_id;

QE_FLIGHTDATA.QE_ACNUMBER.Value = QE_FLIGHTDATA.QE_ACNUMBER + 1;

&FLIGHT_PROFILE = GetLevel0();

&MSG = CreateMessage (Operation.ASYNC_RR);

&Attachment_id = &MSG.IBInfo.AddAttachment (c:\\temp\\myfile.txt);

```

```

&attachReturn = &MSG.IBInfo.SetAttachmentProperty(&Attachment_id,
    %Attachment_Encoding, "UTF-8");

&attachReturn = &MSG.IBInfo.SetAttachmentProperty(&Attachment_id,
    %Attachment_Base, "Standard");

&attachReturn = &MSG.IBInfo.SetAttachmentProperty(&Attachment_id,
    %Attachment_Disposition, "Pending");

&attachReturn = &MSG.IBInfo.SetAttachmentProperty(&Attachment_id,
    %Attachment_Language, "English");

&attachReturn = &MSG.IBInfo.SetAttachmentProperty(&Attachment_id,
    %Attachment_Description, "Parts data");

&MSG.CopyRowset (&FLIGHT_PROFILE);

%IntBroker.Publish(&MSG);

```

Processing Attachment Information Included in Service Operations

The following example shows sample PeopleCode for processing an attachment from a notification:

```

import PS_PT:Integration:INotificationHandler;

class FLIGHTPROFILE implements PS_PT:Integration:INotificationHandler;
    method FLIGHTPROFILE();
    method OnNotify(&MSG As Message);

end-class;

/* Constructor */
method FLIGHTPROFILE
    %Super = create PS_PT:Integration:INotificationHandler();
end method;

method OnNotify
    /* $MSG as Message */
    /* Extends/implements PS_PT:Integration:INotificationHandler.OnNotify */

    Local Rowset &rs;
    Local integer &count;
    Local string &Attachment_ID &Results;

    &rs = &MSG.GetRowset();

    &count = &MSG.IBInfo.NumberOfAttachments;
    If &count > 0 Then

        &Attachment_ID = &MSG.IBInfo.GetAttachmentContentID(1);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Encoding);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Type);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_URL);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Base);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Location);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Disposition);
        &Results = &MSG.IBInfo.GetAttachmentProperty(&Attachment_ID,
            %Attachment_Description);

    End-If;
    /* Process data from message */

```

```
end-method;
```

Assigning Multiple Queues to Process Service Operations

This section discusses how to:

- Enable multi-queue service operation processing.
- Specify multiple queues to process service operations.

Understanding Assigning Multiple Queues to Process Service Operations

You can assign a service operation to multiple queues for unordered processing.

Assigning multiple queues to process service operations is a good approach to distribute message processing for inbound integrations with third-party integration partners. To distribute message processing for integrations with PeopleSoft Integration partners use the primary-secondary dispatcher functionality delivered with Integration Broker.

The Service Operations page features a **Multi-Queues** link that enables you to specify multiple queues to handle inbound or outbound service operations. When you use the multi-queue option, the requests are split across multiple queues.

The **Multi-Queues** link is enabled only when a message is assigned to an unordered queue.

Before you can use this feature you must enable it in the Service Configuration page.

Related Links

“Implementing Primary-Secondary Dispatchers” (Integration Broker Administration)

Enabling Multi-Queue Service Operation Processing

Before you can assign multiple queues to process a service operation, you must enable the multi-queue processing feature on the Service Configuration page.

To enable multi-queue service operation processing:

1. Access the Service Configuration page (**PeopleTools** > **Integration Broker** > **Configuration** > **Service Configuration**).
2. Select the **Enable Multi-Queue** check box.
3. Click the **Save** button.

Specifying Multiple Queues to Process Service Operations

When a service operation contains a message assigned to an unordered queue, the Service Operations—General page displays a **Multi-Queues** link. The **Multi-Queues** link displays in the Message Information section of the page.

Use the link to specify multiple queues to process the service operation.

This example illustrates the Message Information section on the Service Operations – General tab. A **Multi-Queues** link appears to the right of the **Queue Name** field.

The screenshot shows a 'Message Information' panel. It contains the following fields and links:

- Type:** Request
- Message.Version:** IB_EX_ROWSET_CONTAINER.v1. To the right is a magnifying glass icon and a [View Message](#) link.
- *Queue Name:** IB_EXAMPLES. To the right is a magnifying glass icon, a [View Queue](#) link, an [Add New Queue](#) link, and a [Multi-queues](#) link.

When you click the **Multi-Queues** link, the Queues List page (IB_SERVICEQUEUES) appears.

This example illustrates the Queues List page. The example shows that one queue, *IB_EXAMPLES*, has been assigned to process the service operation.

The screenshot shows the 'Queue List' page. It features a table titled 'Service Operation Version Queues' with the following structure:

Service Operation	Version	Queues
		*Queue Name
		IB_EXAMPLES

Below the table, there is a search bar with a magnifying glass icon, and two buttons: a plus sign (+) for adding rows and a minus sign (-) for deleting rows.

The Queues List page shows the queues assigned to process a service operation. Use the **Add Row** button (+) to add new rows and use the **Lookup** button to search for and specify additional queues to process the service operation. Note that when you use the **Lookup** button to search for a queue, only those queues that are active and unordered are available to select.

To assign multiple queues to process an inbound service operation:

1. Access the Service Operations–General page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Operation Definitions**).
2. In the Message Information section, click the **Multi-Queues** link. The Queue List page appears.
3. Click the **Add Row** button (+) to add a new row. A new row appears.
4. Click the **Lookup** button to search for and select an unordered queue.
5. Repeat steps 3 and 4 to assign additional queues to process the service operation.
6. Click the **OK** button. The Service Operations–General page appears.
7. Click the **Save** button.

To remove a queue, click the **Delete Row** button (-) next to the queue name to remove. Click the **OK** button to return to the Service Operations–General page. Then, click the **Save** button.

Invoking Multiple Service Operations

You can invoke multiple service operations on the receiving system using a single inbound service operation. This process is sometimes referred to as service operation fan out.

Invoking multiple service operations using a single inbound service operation applies to asynchronous service operations only.

To invoke multiple service operations on the receiving system using one inbound service operation, you must specify the name of the inbound service operation in the External Alias field on the routing definition of each service operation on the receiving system that you want to invoke.

The service operations on the receiving system do not need to be assigned to the same queue; PeopleSoft Integration Broker will invoke service operations assigned to different queues.

If the sending system sends in a partition key (using the SubQueue HTTP listening connector or PeopleSoft services listening connector parameter), the receiving PeopleSoft system will honor it. If there is a transformation defined for the service operation, partitioning occurs after the transformation. If the sending system does not send in a partition key, the receiving PeopleSoft system applies partitioning according to the queue definition defined for the service operation.

Renaming and Deleting Service Operations

The information in this section pertains to REST and non-REST service operations.

You can rename and delete service operations using the Services Operations page in the Service Administration component. The Services Operations page contains three sections: a Delete section that enables you to delete service operations, a Rename section that enables you to rename service operations, and a Service Change section that enables you to change the service with which a service operation is associated.

To access the page, select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Service Operations** tab.

When you first access the Services Operations page, all sections are collapsed. Click the section header arrow buttons to expand and collapse each section.

This example shows the Service Administration – Service Operations page. The example shows the page with the Delete and Rename sections expanded.

The screenshot shows the 'Service Administration – Service Operations' page. At the top, there are tabs for WSDL, Services, Service Operations (selected), Messages, Message Schemas, Queues, and Routings. Below the tabs, the 'Service System Status' is set to 'Development'. The 'Delete' section is expanded, showing a 'Service Operation' search field with a 'Search' button. Below this is a table titled 'Service Operation Versions' with columns: Select, Service Operation, Version, Service, Default, and Results. The table has one row with a checkbox in the 'Select' column and a checkbox in the 'Default' column. A 'Delete' button is located below the table. The 'Rename' section is also expanded, showing a 'Service Operation' field with a search icon, a 'New Name' field, and a 'Rename' button. Below the 'Rename' button is a 'Results:' label.

At the top of the page, the Service System Status displays the current setting. The service system status, set in the Service Configuration page, impacts the ability to rename and delete messages.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration), “Using the Service Configuration Page to Set Service Configuration Properties” (Integration Broker Administration).

Renaming Service Operations

Renaming a service operation is allowed only if the operation is not referenced in any runtime table. If a service operation is referenced in a runtime table, you must archive the data before you can rename the operation.

You cannot rename service operations associated with the restricted services *IB_UTILITY* and *IB_GENERIC*.

To rename a service operation:

1. Access the Integration Broker Admin – Service Operations page.
2. Expand the Rename section.
3. In the **Service Operation** field, enter the service to rename, or click the **Lookup** button to search for and select the service operation to rename.
4. In the **New Name** field, enter the new name for the service.
5. Click the **Rename** button.

Deleting Service Operations

You can delete service operations individually, with the exception of the default service operation version. If you mark the default service operation for deletion, the system marks all versions for deletion and the entire service operation is deleted.

When you delete a service operation, you are actually deleting a version of a service operation. A service operation cannot exist without at least one default version.

Note: If you delete the default version of a service operation, the system deletes all versions of the service operation.

You cannot delete service operations associated with the restricted services *IB_UTILITY* and *IB_GENERIC*.

To delete a service operation:

1. Access the Integration Broker Admin – Service Operations page.
2. Expand the Delete section.
3. In the **Service Operations** field, enter the service operation name to delete and click the **Search** button.

Search results appear in the results grid.

4. In the results grid, select the check box next to the service operation or service operations to delete.
5. Click the **Delete** button.

Managing REST Services

Understanding Managing REST Services

As non-REST services are used to logically group a set of non-REST service operations, REST services are used to logically group a set of REST service operations.

For example, if you have a number of REST service operations that are related to customers, such as those pertaining to customer information, adding customers, updating customers, deleting customers, and so on, you can create a customer REST service and then associate the related REST service operations with that REST service.

Prior to PeopleTools 8.60 document generation of the metadata for REST Services only supported WADL (Web Application Development Language). Starting with PeopleTools 8.60 REST Services also support OpenAPI.

Before you can provide or consume REST services in a PeopleSoft system, you must configure the system for handling services. “Configuring the Integration System to Handle Services” (Integration Broker Administration)

Common Elements Used to Manage REST Services

<i>Field or Control</i>	<i>Description</i>
Comments	(Optional.) Enter comments about the service or service definition.
Description	Description of the service.
Is Provider	This option appears when the service is defined as a REST-based service. Select the check box to define the service as a provider service.
Open API	Publicly available application programming interface that provides developers with programmatic access to a proprietary software application or web service.
Link Existing Operations	Click to add service operations already defined in the system to a service.

Field or Control	Description
Object Owner ID	(Optional.) Indicates the owner of the service. The owner ID helps to determine the application team that last made a change to a service definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Operation Type	Specifies how the service is transmitted. On the Service page this field defines the operation type of the service operation added.
Provide Web Service	Click to launch the Provide Web Services component and export a PeopleSoft REST service as a WADL document. This link appears only when the service is a provider REST service.
REST Method	Indicates the HTTP method for manipulating REST resources.
REST Service	The service is defined as a REST-based service when this box is selected.
Schema Namespace	Provides qualification for attributes and elements within an XML schema document (XSD). The default is <i>http://xmlns.oracle.com/Enterprise/Tools/schemas</i>. The namespace on the message definition defaults to the schema namespace you set as the default on the Service Configuration page. Note: If you change the namespace, all future messages will have the new namespace.
Service	The name of the service.
Service Alias	(Optional.) Overrides the service name and will be the name of the service when the WSDL is provided or exported. The alias enables you to use mixed case in the name.
Service Operation	The name of the service operation to associate with the service. On the Services page, use this field to add new service operations for the current service.

Field or Control	Description
Namespace	The namespace field on the Service pages provides qualification for attributes and elements within a WADL document. The value defined in the Service Namespace field in the Service Configuration page is used as the default service namespace on the Services page. The default value is <i>http://xmlns.oracle.com/enterprise/tools/service</i>.
Service System Status	The status that is selected restricts rename, delete, and other administrative actions that users can perform on integration metadata in the Services Administration component. Values are: • <i>Production.</i> • <i>Development.</i> See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).
View WADL	Click the link to view WADL documents in the WSDL repository that have been generated for the service This link appears only when the service you are viewing is a REST-based provider service.
View OpenAPI	Click the link to view OpenAPI documents in the WSDL repository that have been generated for the service. This link appears only when the service you are viewing is an Open API REST-based provider service.

Accessing and Viewing REST Service Definitions

This section discusses how to:

- Access REST service definitions.
- View WADL documents for REST services.
- View OpenAPI documents for OpenAPI REST services.
- View REST service operation information.
- View messages defined for REST service operations.

Accessing REST Service Definitions

REST Service definitions appear on the Services page (IB_SERVCEDEFN) in the Service component (IB_SERVCEDEFN).

Use the Services – Search page to search for and access REST definitions in the database.

This example illustrates the Services-Search page.

Services - Search

▼ **Search Criteria**

Service [Add a New Value](#)

☒ REST Service

Search

Services

Service	Service Alias	Object Owner ID	Description
FLIGHT_INFORMATION	flightinformation	PeopleTools	Flight Information
IB_GENERIC_REST		PeopleTools	Generic REST Service

1-10 of 225 | [View 100](#)

Note that the Services – Search page features a **REST Service** check box. To access a REST service in the database you *must* select the **REST Service** check box. If you do not select the check box, the system searches the database for non-REST services only.

To access a REST service definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Definitions**.

The Services-Search page appears.

2. Select the **REST Service** check box.
3. Use one of the following methods to search for a definition:
 - To search for a specific service, in the **Service** field enter the name of the service and click the **Search** button.
 - To view and select from all REST services in the database, click **Search** button, and in the results grid select the service to access.

The definition for the selected service appears in the Services page.

This example illustrates the services page.

Services

Services

Service
*Description
Comments
Service Alias
Owner ID
*Namespace

☒ REST Service Type
☒ Is Provider
☐ Open API

[Link Existing Operations](#)
[View WADL](#)
[Provide Web Service](#)

Service Operations

Service Operation ?
REST Method

Existing Operations

1-5 of 5

View All

Operation

Message Links

||>

Operation.Default Version	Alias	Active	Operation Type	
QE_WEATHERSTATION_DELETE.v1	WeatherStation	☒	Synch	—
QE_WEATHERSTATION_GET.v1	WeatherStation	☒	Synch	—
QE_WEATHERSTATION_HEAD.v1	WeatherStation	☒	Synch	—
QE_WEATHERSTATION_POST.v1	WeatherStation	☒	Synch	—
QE_WEATHERSTATION_PUT.v1	WeatherStation	☒	Synch	—

Field or Control	Description
REST Service Type	Read Only field to indicate this is a REST service.
Is Provider	Read Only field that indicates if this is a Provider REST service (selected) or a Consumer REST service (not selected).
Open API	Read Only field to indicated if this service is Open API.

Field or Control	Description
Link Existing Operations	Click to add service operations already defined in the system to a service. Note: OpenAPI REST Services can not be linked to existing service operations and this link will not appear.
View Open API	For Services with Open API enabled, use this link to view the Open API. See Viewing OpenAPI Documents for REST Services
View WADL	For Services where Open API is not enabled, use this link to view the WADL. Viewing WADL Documents for REST Services
Provide Web Service	Select to launch the Provide Web Services component. Providing REST Web Services Providing OpenAPI REST Web Services

Viewing WADL Documents for REST Services

Click the **View WADL** link to display the WSDL Repository page (IB_SERVICEDEFN_SEC) and access any generated WADL documents for the service.

This example illustrates the WSDL Repository page. The example shows a link to view the WADL document for the *QE_WEATHERSTATION* service.

WSDL Repository

Service: QE_WEATHERSTATION

WSDL/WADL [Search] | [1 of 1]

WADL: QE_WEATHERSTATION.1 ☒ Default Last Update Date/Time: 06/13/2022 11:05:15AM
[View WADL](#)


Exported Service Operations

[Grid Icon] [Search] | [1-5 of 5] | View All

Operation	REST Method
DELETEWeatherStation.v1	DELETE
GETWeatherStation.v1	GET
HEADWeatherStation.v1	HEAD
POSTWeatherStation.v1	POST
PUTWeatherStation.v1	PUT

When you click the **View WADL** link on the WSDL Repository page, the WADL Viewer page (IB_SERVICEWSDL_SEC) appears and you can view the WADL document for the service.

This example illustrates the WADL Viewer page. The example shows the generated WADL document for the *QE_WEATHERSTATION* service appearing on the page.

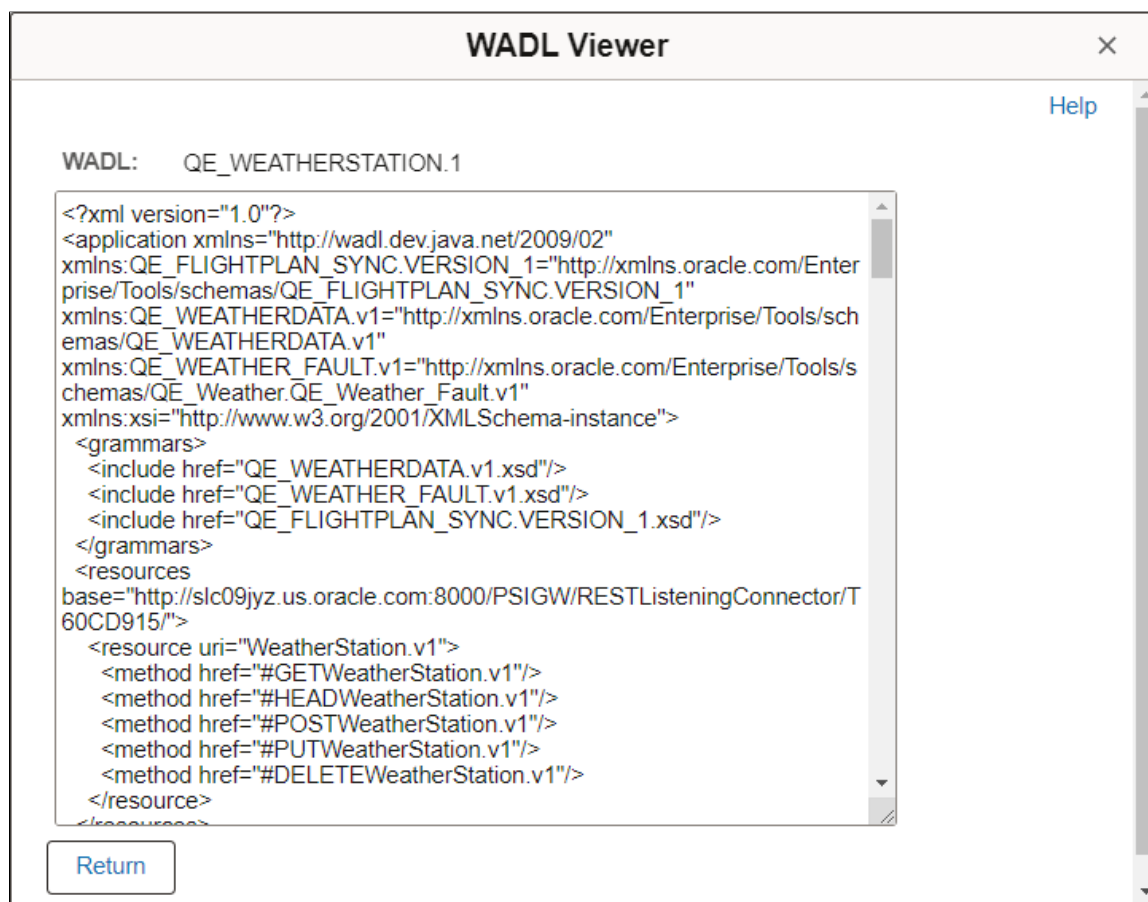

To view a WADL document for a REST service:

1. Access the service definition (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**).
2. Click the **View WADL** link.

The WSDL Repository page appears.

3. Click the **View WADL** link.

The document appears in the WADL Viewer page.

4. Click the **Return** button to return to the WSDL Repository page.
5. Click the **Return** button again to return to the Services page.

Viewing OpenAPI Documents for REST Services

Click the **View OpenAPI** link to display the OpenAPI Repository page (IB_SERVCEDEFN_SEC) and access any generated OpenAPI documents for the service.

This example illustrates an OpenAPI REST Service definition.

Services

Service

FLIGHT_INFORMATION

*Description

Flight Information

*Comments

This service will provide all the information necessary for the pilot to read and update information assigned per the upcoming flight schedule.

*Service Alias

flightinformation

Service Group

Flight

Owner ID

PeopleTools

*Namespace

http://xmlns.oracle.com/Enterprise/Tools/sen

☒ REST Service Type
 ☒ Is Provider
 ☒ Open API


[View OpenAPI](#)
[Provide Web Service](#)

To view the OpenAPI:

1. Access the service definition (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**).
2. Click the **View OpenAPI** link.
The WSDL Repository page appears.
3. Click the **View OpenAPI** link.

The document appears in the OpenAPI Viewer page.

This example illustrates the OpenAPI Viewer page. The example shows the generated OpenAPI for FLIGHT_INFORMATION service.

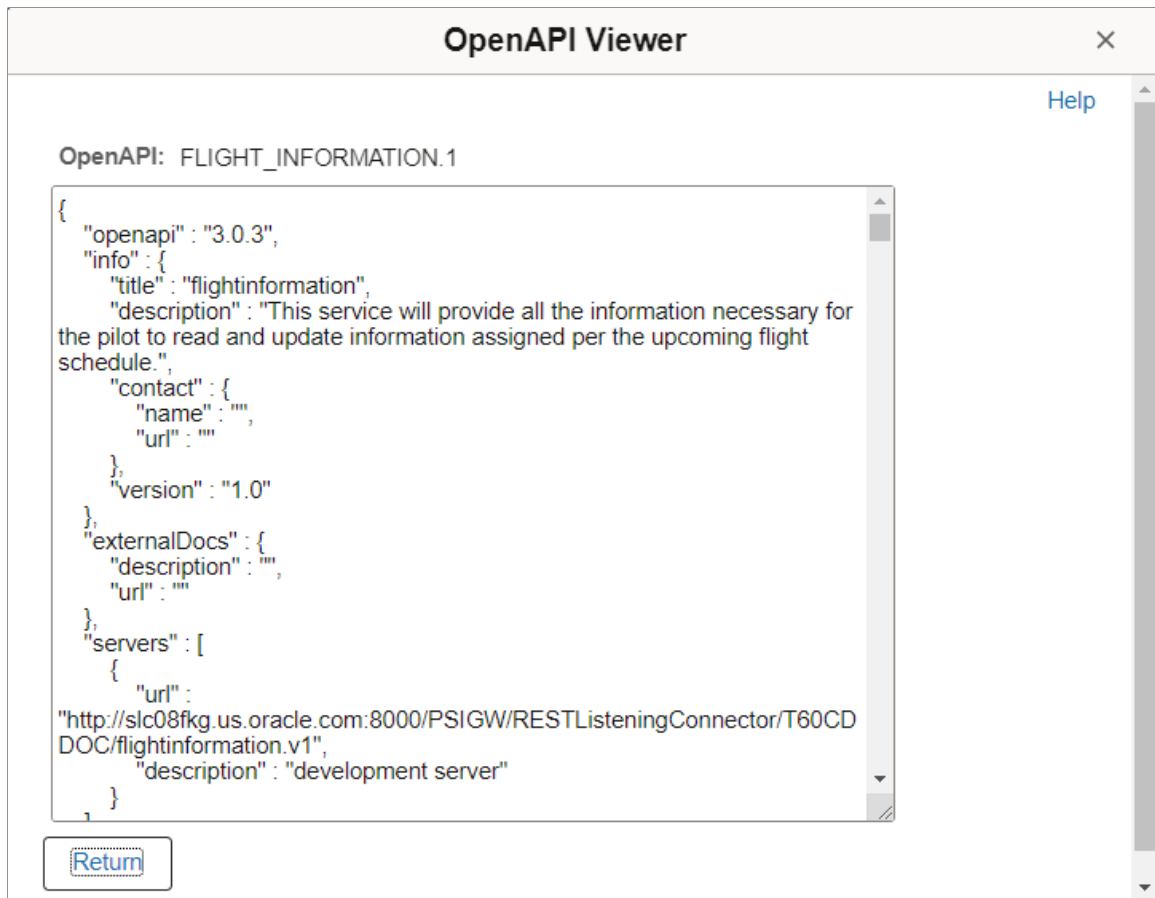

4. Click the **Return** button to return to the WSDL Repository page.
5. Click the **Return** button again to return to the Services page.

Viewing REST Service Operation Information

The Existing Service Operations section of the Services page contains an Operation tab that displays service operations and service operation versions that are associated with the service.

It also displays the service operation Alias, the type of operation, and whether the service operation is active. When you click the name of a service operation, the operation opens on the Service Operations page, where you can view and modify service operations information, work with the service operation handlers, routing definitions, and do much more.

This example illustrates the Existing Operations section.

Existing Operations				
		< > 1-2 of 2 > > View All		
Operation		Message Links		
Operation.Default Version	Alias	Active	Operation Type	
FLIGHT_INFORMATION_GET.v1	flightinformation	☒	Synch	—
FLIGHT_INFORMATION_POST.v1	flightinformation	☒	Synch	—

View Messages Defined for REST Service Operations

The Existing Service Operations section of the Services page contains a Messages Links tab that displays the request and response messages defined for each REST service operation in the service.

This example illustrates the Existing Service Operations section of the Services page. The example shows the Message Links tab displaying request and response messages for the service operations that are associated with the *QE_WEATHERSTATION* service

Existing Operations		
		< > 1-5 of 5 > > View All
Operation		Message Links
Request Message.Version	Response Message.Version	
.	QE_WEATHERDATA.v1	—
IB_REST_STUB.IB_REST_STUB	QE_WEATHERDATA.v1	—
.	.	—
QE_FLIGHTPLAN_SYNC.VERSION_1	QE_WEATHERDATA.v1	—
QE_FLIGHTPLAN_SYNC.VERSION_1	QE_WEATHERDATA.v1	—

Click the request or response message name to open the message in the Message Definitions page, where you can view and modify message definition information, message schema information, and more.

For OpenAPI REST services, the messages will always be *IB_GENERIC_REST.V1*.

This example illustrates the Existing Operations section for an OpenAPI REST service.

Existing Operations						
 		  1-2 of 2				
Operation.Default Version	Alias	Active	Operation Type	Request Message.Version	Response Message.Version	
FLIGHT_INFORMATION_GET.V1	flightinformation	☒	Synch	IB_GENERIC_REST.V1	IB_GENERIC_REST.V1	
FLIGHT_INFORMATION_POST.V1	flightinformation	☒	Synch	IB_GENERIC_REST.V1	IB_GENERIC_REST.V1	

Adding REST Service Definitions

This section discusses how to add REST service definitions to the PeopleSoft system.

Understanding Naming Services and Service Aliases for REST Service Definitions

REST service names and REST service alias names can be exposed as REST services. As a result, the following restrictions apply when you name a REST service or a REST service alias. REST service names and REST service alias names:

- Cannot begin with *XML*, *xml*, or *Xml*.
- Cannot begin with a digit.
- Cannot begin with a character.
- Service Alias for an OpenAPI REST Service must be all lowercase.

Adding REST Service Definitions

To add a REST service definition to the system, use the Add New Service page (IB_SERVICE_ADD). To access this page, select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Definitions**, then select the **Add a New Value** link.

This example illustrates the Add New Service page.

Add New Service

Service:


☒ REST Service

[Return to Search](#)

Note: Before you can add a service, you must configure PeopleSoft Integration Broker to handle services using the Service Configuration page.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

Important! To create a REST service you must select the REST Service option when you add the service.

Enter a Service name in the Service field and click Save.

For restrictions on naming services, see [Understanding Naming Services and Service Aliases for REST Service Definitions](#)

After you add a service definition to the system, the Services page (IB_SERVCEDEFN) appears that you use to configure the service definition.

This example illustrates the Services page with the fields completed.

Services

Service

*Description

*Comments

This service will provide all the information necessary for the pilot to read and update information assigned per the upcoming flight schedule.

*Service Alias

Service Group

Owner ID

*Namespace

☒ REST Service Type
☒ Is Provider
☒ Open API

Service Operations

Service Operation

REST Method

[Return to Search](#)

Enter the required fields and save the service.

Field or Control	Description
Is Provider	By default the Is Provider check box is selected. Clear this check box for a Consumer service.

Field or Control	Description
Open API	Select this check box to indicate that the Service will comply with Oracle REST Standards and generate an Open API.
Service Alias	The Service Alias name must meet Oracle REST compliant naming standard. In addition a check will be made to determine if the Service Alias is unique within the Integration Broker Service Metadata.
Service Group	Optionally select a Service Group that this Service should belong to or create a new Service Group.
Namespace	The default value is the namespace that is declared in the Service Namespace field on the Service Configuration page.

Restricting and Enabling Write Access to REST Service Definitions

You can restrict write access to a REST service so that sensitive fields of the service definition and of associated service operations appear in read-only mode. Use the Restricted Service page (IB_SVCSETUP3) in the Service Configuration component (IB_SVCSETUP) to restrict a service. Use the process for restricting and enabling write access to non-REST service definition for restricting and enabling write access to REST service definitions.

See [Restricting and Enabling Write Access to Service Definitions](#).

Renaming and Deleting REST Service Definitions

You can rename and delete services using the Services tab in the Integration Broker Admin component (IB_HOME_PAGE). Use the process for renaming and deleting non-REST service definitions for renaming and deleting REST service definitions.

See [Renaming and Deleting Service Definitions](#).

Activating and Deactivating REST Service Definitions in Bulk

You can activate and deactivate services in bulk using the Service Activate/Deactivate page (IB_HOME_PAGE9) in the Service Administration component. Use the process for activating and deactivating non-REST services in bulk for activating and deactivating REST services in bulk.

See [Activating and Deactivating Service Definitions in Bulk](#).

Managing REST Service Operations

Understanding REST Service Operations

A *REST service operation* definition consists of general information about an operation, such as its name, description, request and response messages, and so on.

REST services operations are synchronous service operations.

Like a non-REST service operations, a REST service operation contain a routing, which determines the direction, inbound or outbound, of the service operation.

For a provider REST service operation the system creates an any-to-local routing definition when you save the service operation. You have the option to generate a local-to-local routing definition. For consumer REST service operations the system creates an outbound local-to-WADL routing definition when you save the service operation. You cannot add routing definitions to provider or consumer REST service operations.

A REST service operation definition also contains a handler, which contains and runs the programming logic for providing or consuming the service operation, manipulating message content, and so on.

REST Service Operations Types

All REST service operations are synchronous service operations.

A synchronous service operations is processed in real time. Processing on the sending system does not continue until it receives a response from the receiving system.

REST Methods

REST methods determine the HTTP method for manipulating the resources defined in the service operation. The valid values are listed and described in the following table and can all be used for provider and consumer service operations:

<i>Term</i>	<i>Definition</i>
DELETE	Delete an existing resource.
GET	Retrieve a representation of a resource.
HEAD	Identical to a GET except that no message body is returned in the response.

Term	Definition
PATCH	Update a partial resource.
POST	Create a new resource to an existing URL.
PUT	Create a new resource to a new URL, or modify an existing resource to an existing URL.

OPTIONS Method

The HTTP Options method is used to request information about the communication options available for the target resource.

In order to enable accepting the HTTP Options method the parameter called `ig.OptionsEnabled` needs to be set to `TRUE` in the `IntegrationGateway.Properties` file on the web server. Note that HTTP Options is only applicable for the REST Listening Connector.

Options method is only applicable for Provider REST Services.

REST Resource Definitions

REST service operation definitions contain a REST Resource Definition section where you define the REST base URL, resource URI templates, URI indexes, and document template.

See [Describing REST Resource Definitions](#).

REST Messages

This section provides information about request and response messages used in REST service operations.

Request and Response Message Combinations

The REST method you select for a REST service operation determines the request and response message combination that you can use for the operation. The following table lists the allowable request and response message combinations for each REST method:

REST Method	Request Message	Response Message
Delete	Yes	Yes
Get	No	Yes
Head	No	No

REST Method	Request Message	Response Message
Options Note: This method is only applicable for the REST Listening Connector.	Yes	No
Patch	Yes	Yes
Post	Yes	Yes
Put	Yes	Yes

MIME Content-Types

When you specify a message for a REST service operation, you must also specify the MIME content-type of the message. PeopleSoft supports the following content types for request and response messages used for REST service operations:

- application/json
- application/xml
- text/xml
- text/plain
- text/html

HTTP Status Codes

When you define a message for a REST service operation, along with the MIME content-type, specify the HTTP response code to return to the integration partner. Note that the content-type defines the acceptable HTTP media type.

PeopleSoft supports the following HTTP status codes:

- 200 - Default. OK: Request successfully executed and the response has content.
- 201 - This value is valid only when the REST method is *Post*.

Created: Resource successfully created. The response contains the created resource and possibly a location header that points to the new resource.

- 202 - Accepted: Request has been accepted for processing but processing has not been completed. This is required for resource that supports asynchronous process.
- 203 - This value is valid only when the REST method is *Get*.
- 204 - No Content: Request successfully executed and the response doesn't have content.

- 205 - Reset Content: Tells the user agent to reset the document which sent this request.
- 206 - Partial Content: This response code is used when the Range header is sent from the client to request only part of a resource.
- 207 - Multi-Status: Conveys information about multiple resources, for situations where multiple status codes might be appropriate.

Optional MIME Content-Types and HTTP Status Codes

Using the **Set Content Types** window, you can assign optional content-types and status codes to message instances on REST service operations. You can type in any content type or select from the existing content types.

Generated WADL documents will reflect the optional content-type values, allowing consumers to request the content type they prefer.

You can define optional content types on request, response, and fault message instances.

You can define optional status codes on response message instances.

Naming Conventions for REST Service Operation Metadata

The same naming convention restrictions that apply to non-REST service operations apply to REST service operations.

See [Naming Conventions for Service Operation Metadata](#).

REST Service Operation Aliases

A service operation alias or operation alias is the service operation name that displays for the service operation when WADL or OpenAPI is provided.

REST service operation aliases may be mixed case. For OpenAPI REST services, the alias must be all lowercase.

Service operation alias names for REST service operations can be the same across types. For example, you can have the same alias, for example *myalias*, for Delete, Get, Patch, Put, Post and Head REST service operations.

REST Service Operation Versions

The same information about non-REST service operation versions applies to REST service operation versions.

Note: OpenAPI REST Service Operations are not versioned.

See [Service Operation Versions](#).

WADL Node

PeopleTools delivers a WADL node that is the default node for consumer REST services.

Monitoring REST Service Operations

You can use the same tools to monitor REST service operations as those you use to monitor non-REST service operations. These tools include:

- The Service Operations Monitor.
- The Integration Network Monitor.
- The Integration Network Transactional Tracker.
- Performance monitoring tools.

The Managing Service Operations topic in the product documentation provides a brief summary of each of these tools.

See [Monitoring Service Operations](#).

Related Links

Integration Broker Service Operations Monitor

“Using the Integration Network Monitor” (Integration Broker Administration)

“Using the Integration Network Transactional Tracker” (Integration Broker Administration)

“Monitoring PeopleSoft MODULE and ACTION Information” (Data Management)

Accessing REST Service Operations

You access a REST service operation definition from the service definition that contains the operation you want to access or you can use the Service Operations Search page.

Use the Services Operations Search page (IB_OPERATION) to list and access REST service operations. Use the Service Operations page (IB_SERVICE_REST) to view and work with REST service operations.

To access a REST service operation:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Operations Definitions**.

The Services Operations – Search page appears.

2. In the **Service** field, perform one of the following actions:
 - Enter all or part of the service name.
 - Click the **Lookup** button to search for and select a service name.
 - Leave the field blank to retrieve a list of all REST services in the database.
3. Click the **Search** button.

The Services Operations grid displays a list of results.

This example illustrates the Service Operations Search page.

Service Operations - Search

Service:

QE_WEATHERSTATION

Q

Service Operation:

Q

Operation Type:

▼

Operation Alias:

Q

Search

Add a New Value

Service Operations

☰

Q

<

>

1-10 of 10

>

>|

View All

Service	Service Operation	Operation Type	Operation Alias
QE_WEATHERSTATION	QE_WEATHERSTATION_DELETE	Synchronous	WeatherStation
QE_WEATHERSTATION	QE_WEATHERSTATION_GET	Synchronous	WeatherStation
QE_WEATHERSTATION	QE_WEATHERSTATION_HEAD	Synchronous	WeatherStation
QE_WEATHERSTATION	QE_WEATHERSTATION_POST	Synchronous	WeatherStation
QE_WEATHERSTATION	QE_WEATHERSTATION_PUT	Synchronous	WeatherStation
QE_WEATHERSTATION_CONSUME	QE_WEATHERSTATION_CONSUME_GET	Synchronous	WEATHERSTATION_CONSUME

- Click the service operation name.

The Service Operations – General tab appears with data for the service operation that you selected.

Viewing REST Service Operation Definitions

The Service Operations component includes three pages - General, Handler and Routings.

Field or Control	Description
General Tab	Features general-service and default-service operation information. This page also features REST resource definition information. The REST Resource information section differs depending on whether or not it is an OpenAPI REST service.

306

Copyright © 1988, 2025, Oracle and/or its affiliates.

<i>Field or Control</i>	<i>Description</i>
Handlers Tab	Provides summary information about handlers that have been added to an operation. Service operation handlers contain the programming logic for sending and receiving service operations and their contained messages, and for manipulating content. Note that handlers are not used for REST consumer-based service operations and the Handler tab does not appear when you view or work with a consumer REST service operation.
Routings Tab	Provides summary information about service operations routings. Routing definition determine the direction — inbound, outbound — of service operations.

Viewing General Service Operation Information

The Service Operations General page differs depending on whether or not OpenAPI is selected.

The top portion of the General page contains basic information about a service operation, including its name, description, and so on.

The **Service Operation Security** link opens the permission list for the service. Note that the **Service Operation Security** link appears only after a service operation definition is saved.

This example illustrates the top portion of the Service Operations General page.

The screenshot shows the 'General' tab of the Service Operations page. The fields are as follows:

- Service Operation:** FLIGHT_INFORMATION_POST
- REST Method:** POST
- *Operation Description:** flight
- Operation Comments:** Update Flight Information
- Owner ID:** PeopleTools
- Operation Alias:** flightinformation
- Security Options:**
 - ☐ User/Password Required
 - *Req Verification:** None
 - [Service Operation Security](#)
 - ☐ Used with Think Time Methods

Viewing the REST Resource Definition and Default Service Operation Version for Open API Rest Service Operation

The REST Resource definition section for an Open API REST Service Operation requires Root Resources. For each Root Resource, it is necessary to define the details for each index.

The REST Resource Definition section for an Open API REST displays the REST base URL, as well as the resources defined for the service operation, and the name of the document template associated with the service operation. A link is also provided to View the Document Template message.

This example illustrates the REST Resource Definition Section for an Open API Rest Service.

REST Resource Definition

REST Base URL

URI Template Format Example: weather/{state}/{city}?forecast={day} [Add/Remove Root](#)

URI

Index	Root Resource	Template	Details	Validate	Build		
1	weather	weather/{state}/{city}	Details	Validate	Build	+	-
2	weather	weather/{state}	Details	Validate	Build	+	-
3	traffic	traffic/{state}/{city}	Details	Validate	Build	+	-
4	traffic	traffic/{state}	Details	Validate	Build	+	-
5	traffic	traffic	Details	Validate	Build	+	-

Document Template [View Message](#)

Field or Control	Description
Add/Remove Root	The Add/Remove Root link opens the Add/Remove Root Resources page. See Adding and Removing Root Resources.
Details	The Details link opens the URI Template Details page which contains the message.version for Request, Response and Fault messages See Entering Details for the URI Template.
Validate	The Validate link opens the Validate URI page. See Validating URI Templates
Build	The Build link open the URI Template Builder page. See Building the URI Template.

See [Managing REST Resource Definitions for Open API REST Service](#) and [Defining REST Base URLs](#).

The Default Service Operation Version section contains the current active and routing status. You can regenerate routings, by select the appropriate check box and saving the page.

This example illustrates the Default Service Operation Version section for an Open API REST Service Operation

Default Service Operation Version

Versionv1

☒ Default☒ Active

Routing Actions Upon Save

☐ Regenerate Any-to-Local☐ Generate Local-to-Local

Routing Status

Any-to-LocalExists

Local-to-LocalDoes not exist

Viewing REST Resource Definition and Default Service Operation Version

For REST Service Operations that do not use Open API, the same message versions are used for all URI indexes.

The REST Resource Definition section displays the URL Identifier, REST base URL, the resources defined for the service operation, and the name of the document template associated with the service operation. A link is also provided to View the Document Template message.

This example illustrates REST Resource Definition section for REST Service that does not use Open API.

REST Resource Definition

URL IdentifierWEATHER_ENDPOINT

REST Base URLhttp://[hostname]:[port]/[context]/[resourceName]

URI Template Format Example: weather/{state}/{city}?forecast={day}

URI

PersonalizeFind

First1-3 of 3Last

Index	Template	Validate	Build
1	weather/{state}/{city}?forecast={day}	Validate	Build
2	weather/{state}/{city}	Validate	Build
3	weather/{state}	Validate	Build

Document TemplateQE_WEATHERTEMPLATE.v1

View Message

For more information see [Defining REST Base URLs](#) and [Managing REST Resources](#).

This example illustrates the Default Service Operation Version where Open API is not selected for the REST Service.

Default Service Operation Version

*Version

v1

Version Description

WeatherStation Zebra

Version Comments

☒ Default
 ☒ Active

Routing Status

Any-to-Local	Exists
Local-to-Local	Exists

[Delete Fault Type](#)

Runtime Schema Validation

☐ Request Message
 ☐ Response Message

Routing Actions Upon Save

☐ Regenerate Any-to-Local
 ☐ Regenerate Local-to-Local

Message Instance

Type

Request

Message.Version

QE_FLIGHTPLAN_SYNC.VERSION

Q

Content-Type

text/xml

▼

View Message

Optional Content-Types

Type

Response

Message.Version

QE_WEATHERDATA.v1

Q

Content-Type

text/xml

▼

Status Code

201

▼

View Message

Optional Status Codes

Type

Fault

Message.Version

QE_WEATHER_FAULT.v1

Q

Content-Type

text/xml

▼

Status Code

400

▼

View Message

Optional Status Codes

This section displays the current active and routing status. You can regenerate routings, by select the appropriate check box and saving the page.

The Runtime Schema Validation group box shows if runtime schema validation is selected for the request and response message.

The Routing Status group box shows the routing statuses that exist.

The Routing Actions Upon Save group box allows you to regenerate routings.

The Message Instance section displays the request message, response message information, and fault message for the service operation. The **View Message** links in this section open the displayed message on the Message Definition page, where you can view additional information about the message.

Viewing Handler Page

The Handler page defines the Application Class that provides the processing logic for the service operation.

To view service operation handler information, click the **Handlers** tab. Doing so displays the Service Operations - Handlers page (IB_SERVICEHDLR) which lists summary information about handlers that have been added to an operation.

Each REST-based provider service operation has a single handler; REST-based consumer service operations do not have handlers.

Note: There are no handlers for REST-based consumer service operations and the Handler tab does not appear when you view and work with consumer REST service operations.

The only handler Type available for provider REST services is the OnRequest handler. When working with REST provider service operations you can implement the OnRequest handler as an application class only. The application class is implemented as any other OnRequest integration broker event.

This example illustrates the Handler page

General

Handlers

Routings

Service Operation

FLIGHT_INFORMATION_POST

Default Version

v1

Operation Type

Synchronous

Handlers

1-1 of 1

>

>|

View All

	Name	Type	Sequence	Implementation	Status			
1	REQUESTHDLR	On Request		Application Class	Active	Details	+	-

The summary information includes the handler name, the handler type, and the implementation method for the handler. The status of the handler, active or inactive, also appears.

Use the Details link to view the Handler details.

This example illustrates the Handler Detail page

✕
Help

Handler Name REQUESTHDLR

Handler Type On Request

Description

Comments

Handler Owner

Application Class

***Package Name** Q

***Path** Q

Class ID Q

Method v

Viewing Routings Page

The Routings page provides a summary of routing definitions for a service operation.

Click the **Routings** tab to open the Service Operations - Routings page (IB_SERVICERTNGS) to view a summary of routing definitions for an operation.

This example illustrates the Routings page.

General Handlers Routings

Service Operation FLIGHT_INFORMATION_POST

Default Version v1

☐ User Exception

Note This user exception status is applicable only if an outbound routing cannot be determined. If a valid outbound routing can be determined then the user exception status on the actual routing will be used.

Routing Definitions

☐ Q

|< < 1-1 of 1 > >| View All

Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results
☐	~GENERATED-68972746	v1	Synch	~~ANY~~	T60CD908	Inbound	Active	-

Inactivate Selected Routings

Activate Selected Routings

The **Routings Definition** grid on the page lists summary information for routings that are defined for a service operation. Summary information that is displayed includes the routing definition name, service operation version, routing type, sending node, receiving node, direction of the routing and the routing status.

Click a routing definition name to open the routing in the Routing Definitions component, where you can view additional information about the routing.

When you create a provider REST service operation the system automatically creates an any-to-local routing. You can also generate local-to-local routings for a provider REST service operation.

See [Viewing Routing Definitions in Graphical Format](#).

You can also use this page to activate or inactivate routings for an operation.

See [Adding Routing Definitions](#), [Activating and Inactivating Routing Definitions](#).

Adding REST Service Operations

To add a REST service operation to the system, you must first create a REST service using the Services component.

See [Adding REST Service Definitions](#).

Important! You can add only those service operations defined as REST service operations to REST service definitions; you cannot add non-REST service operations to REST services and you cannot add REST service operations to non-REST services.

The type of service, provider or consumer, determines the type of service operation that the system adds. If you are working with a provider service and add a service operation, a provider service operation is added to the service; if you are working with a consumer service and add a service operation, the system adds a consumer service operation.

To add REST Service Operations:

1. Select **PeopleTools > Integration Broker > Integration Setup > Service Definitions**.
2. Select the REST Service checkbox.
3. Search for the Service Definition.
4. Use the Service Operations section to add REST Method.

This example illustrates the Services page for a REST Service.

Services

Service

FLIGHT_INFORMATION

*Description

Flight Information

*Comments

This service will provide all the information necessary for the pilot to read and update information assigned per upcoming flight schedule

*Service Alias

flightinformation

Service Group

Flight

Owner ID

PeopleTools Demo

*Namespace

http://xmlns.oracle.com/Enterprise/Tools/sen

☒ REST Service Type
☒ Is Provider
☒ Open API

[View OpenAPI](#)

Service Operations

Service Operation

FLIGHT_INFORMATION

REST Method

Add

5. Select the REST method from the drop-down list. The valid values are:

- *Delete.*
- *Get.*
- *Head.*

Note: HEAD is no longer a required selection to process HEAD requests for a REST provider. The IB framework, when processing the HEAD method calls, will invoke the GET method (all authentication/validation applies with respect to the GET method). No response payload data will be turned. To invoke a HEAD method for REST Consume, the developer should use the GET method and set the property on the message object prior to calling the SyncRequest. For more information, see [Invoking the HEAD Method for REST Consumer Service Using GET](#).

- *Patch.*
- *Post.*

- *Put.*

See [REST Methods](#).

6. Click Add.

The Service Operations page appears.

The system automatically appends the service operation name with the name of the selected REST method. This functionality allows you to reuse the service operation name using other method types.

For example, if you enter the REST method GET for the Service FLIGHT_INFORMATION, the Service operation will be FLIGHT_INFORMATION_GET.

See [Defining General REST Service Operation Details](#).

Invoking the HEAD Method for REST Consumer Service Using GET

To invoke the HEAD method for a REST consumer service, use the GET method. A new message property will be created called `HeadRequest` which will take a boolean value. When set to **True**, it will change the method internally from a GET HTTP method to HEAD. This should be set prior to making the `SyncRequest` call.

The following example illustrates the use of the GET method to invoke a HEAD for the `QE_WEATHERSTATION_CONSUME_GET` consumer REST service operation:

```
&MSG = CreateMessage(Operation.QE_WEATHERSTATION_CONSUME_GET);
&DOC = &MSG.GetURIDocument();
&COM = &DOC.DocumentElement;

&COM.GetPropertyByName("state").Value = "Washington";
&COM.GetPropertyByName("city").Value = "Redmond";
&COM.GetPropertyByName("day").Value = "today";
&COM.GetPropertyByName("week").Value = "first";
&COM.GetPropertyByName("year").Value = "2010";
&COM.GetPropertyByName("country").Value = "USA";

&MSG.URIResourceIndex = QE_FLIGHTDATA.QE_ACNUMBER;
&bRet = &MSG.IBInfo.LoadRESTHeaders();

&MSG.HeadRequest = True;

&return_message = %IntBroker.SyncRequest(&MSG);
```

Defining General REST Service Operation Details

The top portion of the Service Operations - General page is used to define general information about the service operation.

When you click Add on the Service Definition page to add a new Service Operation, the system automatically appends the service operation name with the name of the selected REST method and opens the Service Operation General page.

The top portion of the Service Operation is the same for all REST Service Operations, however the REST Resource Definition and Default Service Operation Version sections are different.

This example illustrates the top portion of the Service Operations - General page.

General	Handlers	Routings
Service Operation	FLIGHT_INFORMATION_GET	
REST Method	GET	
*Operation Description		
Operation Comments		
Owner ID		
Operation Alias	flightinformation	
	☐ User/Password Required *Req Verification None	
	☐ Used with Think Time Methods	

Field or Control	Description
Operation Description	Enter a description for the operation.
Operation Comments	(Optional) Enter comments for the operation
User ID/Password	(Optional) Select this check box to require a user ID and password for inbound service operations. See “Managing User Authentication” (Integration Broker Administration).
Req Verification	The Security Verification drop-down list appears when you are configuring a provider service operation. You may select the level of security with which inbound integrations must be sent. The valid options for REST based provider/inbound service operations are: • <i>Basic Authentication.</i> • <i>Basic Authentication and SSL.</i> • <i>None.</i> (Default.) • <i>OAuth2 Authentication</i> • <i>OAuth2 Authentication and SSL</i> • <i>PeopleSoft Token.</i> • <i>PeopleSoft Token and SSL.</i> • <i>SSL.</i> See “Validating Security on Inbound Integrations” (Integration Broker Administration).

Field or Control	Description
Owner ID	(Optional) Select the owner of the definition. The owner ID helps to determine the application team that last made a change to a service definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Operation Alias	When working with REST service operations the service operation alias is automatically populated with the service operation name as you entered it when you created the service operation. Note: For OpenAPI REST service operations this field is read only and can not be changed.
Used with Think Time Methods	Select in cases where Think Time is used on the component that is invoking the service operation. If selected, synchronous logging is disabled if IB Profiling is enabled. Certain SQL inserts cannot be performed when Think Time is enabled.

To define the REST Resource definitions for an Open API REST service, see [Managing REST Resource Definitions for Open API REST Service](#)

To define the REST Resource definitions for REST Services that do not use Open API, see [Managing REST Resources](#)

The Service Operation Security link will appears once the service operation is saved.

Related Links

“Understanding OAuth 2.0” (Security Administration)

Describing REST Resource Definitions

The REST Resource Definition section of the Service Operation is where you define the REST base URL, one or more URI templates, and a document template.

This information is included in the WADL document or Open API document that the service provider furnishes to the service consumer. The service consumer then extracts the information from the WADL document or Open API document and defines it in the consumer service operation it creates for the service.

Understanding REST Resource Definition Concepts

This section describes REST resource definition concepts.

REST Base URL

The REST base URL is the common part of the URL to invoke the provider or consumer web service.

For a REST service provider this value is always the REST target location entry defined on the Service Configuration page for provider service operations. When the Provide Web Service wizard is used to create the WADL document, the option to select a secure REST target location can be selected. For provider service operations this URL is simply informational to show what would be used when creating the complete URL(s).

The REST base URL is constructed as part of the initialization/retrieval of the service operation and uses the following format:

```
<Provider REST target location>/< External alias from any-to-local routing>/
```

For a REST consumer the common part of the URL defined is the provider's WADL document.

Document Template

A document template is a Document type message that define in the REST resource definition. The document message has primitive elements and collection elements defined with names used for value replacement within the URI template. This document can only contain primitive elements and collection elements. The document cannot contain any imports (compounds) or compound elements. The advantage of using documents is that they cannot be inadvertently changed, as is not the case with defined records and/or fields.

Note: In the Document definition, the variables defined with the braces ({ }) in the URI template must be the exact name of the element name defined on the Document page, not the Tag Name defined on the XML page.

A document template is a URI on the wire with values in it.

URI Template

Resources are constructed using URI templates. URI templates use a simple syntax where braces denote variables to be replaced when the templates are converted to actual URLs. You define the values for the URI template variables in the REST document template.

You can define one or more URI template strings to define one or more resources for the definition

Note: PeopleSoft supports direct variable substitution.

The following example shows a sample URI template syntax:

```
weather/{state}/{city}?forecast={day}
```

The denoted variables identified with the braces ({ }) are replaced with the actual values as defined in the document template. In the example shown the variables are *state*, *city* and *day*.

The system validates the string entered for the template to ensure that there is no equivalent or ambiguous defined templates currently entered on the grid. Moreover the values used within the braces ({ }) must be defined on the document template to pass validation.

You can build URI templates by manually entering variable strings in the template fields in the REST Resource Definition or you can use the URI Builder. Each of these methods for building URI templates is discussed later in this topic.

URI Index

The system assigns an integer index value to each URI template you create for a REST service operation upon save.

You will later use these index numbers in PeopleCode to call and manipulate the associate URI template.

URI Template Validation

When you construct a URI template, you can verify the URL produced.

The REST Resource Definition URI grid features a Validate link that provides access to the Validate URI page where you can populate the URI with values from the document template and then test the link.

Understanding URI Template Expressions and Expansions

When building URI templates it is necessary to know these terms:

<i>Field or Control</i>	<i>Description</i>
Expression	The text between ‘{’ and ‘}’, including the enclosing braces.
Expansion	The string result obtained from a template expression after processing it according to its expression type, list of variables names, and value modifiers.

PeopleSoft supports the URI template expressions shown in the table. The table summarizes each type of template expression by its associated operator. The example expansions are based on the following variables and values:

```
var      := "value"
tools    := "tools rules!"
empty    := ""
list     := [ "val1", "val2", "val3" ]
path     := "/foo/bar"
x        := 1024
y        := 768
```

In each code example, the values in the first column are the expressions and the values in the second column are the expansions.

<i>Expression Type</i>	<i>Operator</i>	<i>Description</i>
Form-Style (Continuation.)	⇒ ⇒ ⇒ &	Form-style query continuation {&x, y} &x=1024&y=768 {&x, y, empty} &x=1024&y=768&empty= {&list} &list=val1, val2, val3 {&list*} &list=val1&list=val2&list=val3

Expression Type	Operator	Description
Form-Style (Expansion.)	⇒ ⇒ ⇒ ?	Form-style query expansion. <pre> {x,y} ?x=1024&y=768 {x,y,empty} ?x=1024&y=768&empty= {?list} ?list=val1,val2,val3 {?list*} ?list=val1&list=val2&list=val3 </pre> Note that the expansion process omits the equal sign (=) when the variable value is empty.
Fragment.	⇒ ⇒ ⇒ #	Fragment expansion with comma-separated values. <pre> {#var} #value {#tools} #tools%20rules! {#path}/here #/foo/bar/here {#path,x}/here #/foo/bar,1024/here {#path{x}}/here #/foo/bar1024/here {#empty}/here #/here {#list} #val1,val2,val3 {#list*} #val1,val2,val3 </pre>
Label.	⇒ ⇒ ⇒ .	Label expansion, dot-prefixed <pre> X{.var} X.value X{.empty} X. X{.list} X.val1,val2,val3 X{.list*} X.val1,val2,val3 </pre>
Path-Segment.	⇒ ⇒ ⇒ /	Path-segments, slash-separated <pre> {/var} /value {/var,empty} /value/ {/list} /val1,val2,val3 {/list*} /val1,val2,val3 </pre>
Path-Style.	⇒ ⇒ ⇒ ;	Path-style parameters, semicolon-prefixed. <pre> {;x,y} ;x=1024;y=768 {;x,y,empty} ;x=1024;y=768;empty {;list} ;list=val1,val2,val3 {;list*} ;list=val1;list=val2;list=val3 </pre> Note that the expansion process omits the equal sign (=) when the variable value is empty.
Reserved.	⇒ ⇒ ⇒ +	Reserved expansion with comma-separated values. <pre> {+var} value {+tools} tools%20rules! {+path}/here /foo/bar/here {+path,x}/here /foo/bar,1024/here {+path{x}}/here /foo/bar1024/here {+empty}/here /here {+list} val1,val2,val3 {+list*} val1,val2,val3 </pre>

<i>Expression Type</i>	<i>Operator</i>	<i>Description</i>
Simple String.	NA	Simple expansion with comma-separated values. <pre> {var} value {tools} tools%20rules%21 {path}/here %2Ffoo%2Fbar/here {x,y} 1024,768 {var=default} value {list} val1,val2,val3 {list*} val1,val2,val3 </pre>

Note the following about the operators, expressions, and expansions shown in the table:

- The operator's associated delimiter (“;”, “?”, “/”, “.”, “#”) is omitted when none of the listed variables are defined.
- Multiple variables and list values have their values joined with a comma (“,”) if there is no predefined joining mechanism for the operator.
- The operators plus (+) and fragment (#) substitute non-encoded reserved characters found inside the variables value; the other operators pct-encode reserved characters found in the variable values prior to expansion.
- The explode modifier (“*”) indicates that the variable represents a composite value that may be substituted in full or partial forms, depending on the variables type or schema. The asterisk (“*”) indicates that just the component names and values are included in the expansion.

Prerequisites for Managing REST Resource Definitions

The REST target URL must be specified on the Service Configuration – Target Locations page. The steps for defining the REST target location are described elsewhere in the product documentation.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

You must have created a Document type message that contains the values for any variable data you plan to use in the URI templates. For this reason you must have an understanding of PeopleSoft Documents Technology to create and manipulate Document type messages.

For information on PeopleSoft Documents Technology see the product documentation for Documents Technology.

Defining REST Base URLs

This section describes defining REST base URLs for provider and consumer service operations.

For consumer service operations you obtain the REST base URL from the WADL document document furnished to you by the service provider. You specify the URL in the **REST Base URL** field in the REST Resource Definition section of the Service Operations – General page.

Specifying REST Base URLs (Provider Services)

REST Target Locations are defined on the Target Location page (PeopleTools > Integration Broker > Configuration > Service Configuration > Setup Target Location). See “Using the Target Locations Page to Set Target Locations for Services” (Integration Broker Administration).

Target Location

```
http://<machine>:<port>/PSIGW/RestListeningConnector/<defaultlocalnode>
```

Secure Target Location

```
https://<machine>:<port>/PSIGW/RestListeningConnector/<defaultlocalnode>
```

The REST base URL for a provider service operation is auto-populated by the system. The value populated comes from the REST target location defined on the system and the routing alias defined on the any-to-local routing definition for the service operation.

For example:

```
http://providerserver.example.com:8010/PSIGW/RESTListeningConnector/node/weathersta-
tion.v1
```

The REST base URL for a provider service operation appears in a read-only field in the REST Resource Definition section of the Service Operations – General page.

To access the Service Operations – General page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates the REST Base URL on the Service Operations – General page for a provider service operation.

REST Resource Definition	
REST Base URL	http://providerservice.example.com:8010/PSIGW/RESTListeningConnector/T60CD905/Wez
URI Template Format Example: weather/{state}/{city}?forecast={day}	

Specifying REST Base URLs (Consumer Services)

The service provider furnishes service consumers the value of the base URL to define, usually in a WADL document or Open API document. As the service consumer you then define this value in the REST Resource Definition section of the Service Operations – General page in the consumer service operation definition.

To access the Service Operations – General page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates the REST Resource Definition section on the Service Operations – General page for a consumer service operation.

REST Resource Definition	
URL Identifier	WEATHER_ENDPOINT 
REST Base URL	http://[hostname:147402.ad1.fusionapp.oracle.com:5000/PSIGW/RESTListeningConnector/T62KAC14/
URI Template Format Example: weather/{state}/{city}?forecast={day}	

Enter the REST Base URL for the Provider Service.

Managing REST Resource Definitions for Open API REST Service

Only one Service Operation for each REST method type is supported for an Open API REST Service. Service Operation Root Resources can be created to create different Service Operations based off the Root Resource.

This example illustrates the REST Resource Definition section for an Open API REST Service.

REST Resource Definition

REST Base URL

URI Template Format Example: weather/{state}/{city}?forecast={day} [Add/Remove Root](#)

URI

Index	Root Resource	Template	Details	Validate	Build
			Details	Validate	Build

Document Template [View Message](#)

Building the REST Resource Definition involves the following steps:

1. If URI variables are to be included in the template, it is necessary to create a Document Template message that contains the variables for the URI.

See “Adding Documents” (Documents Technology) and [Creating Document Message Definitions](#).

2. Add Root Resources.
3. Select the Document Template.
4. Build the URI index by manually entering the URI or using the Build link.
5. Use the Details link to define the Request, Response, and Fault messages for the URI.
6. Use the Validate link to validate the URI.
7. Add Service Operation Handler information.
8. When you save the Service Operation a Any-to-Local routing will be created.

Adding and Removing Root Resources

Use the Add/Remove Root link to define Root Resources for the Service Operation.

This example illustrates the Add/Remove Root Resources page.

	Root Resource	Description		
1	weather	Provides weather information based on flight schedule	+	-
2	traffic	Provide potential information on flight patterns	+	-

OK Cancel

The Root Resource names must meet Oracle naming standards.

The description is mandatory as it is used as part of the Open API document generation.

A Root Resource can be deleted using the Delete Row icon if its not already defined on the URI Template.

Building the URI Template

You can define one or more URI template strings to define one or more resources for the definition.

URI template strings can be entered manually or using the Build link.

Manually Entering the URI Template String

To manually enter the URI template string:

1. Select the root resource.
2. Enter the string starting with the root resource, using separators between variables and enclosing the variables in brackets {}.

This example illustrates Template URI strings.

REST Resource Definition

REST Base URL:

URI Template Format Example: `weather/{state}/{city}?forecast={day}` [Add/Remove Root](#)

URI

Index	Root Resource	Template	Details	Validate	Build		
	weather	weather/{state}/{city}	Details	Validate	Build	+	-
	weather	weather/{state}	Details	Validate	Build	+	-
	traffic	traffic/{state}/{city}	Details	Validate	Build	+	-

Document Template: [View Message](#)

Using the Build link

Note: You must enter the Document Template field before you can use the Build option.

To use the Build link to enter the URI string:

1. Select the Document Template.
2. Select the Root Resource.
3. The root resource is added to the template field.
4. Click the Build link.
5. Add a separator when needed.
6. Select variables from the template and click Add.

The variable is displayed in brackets.

7. Click Append to URI.

The URI Template field shows the current value.

8. Repeat steps 5 to 7 for each variable to add.
9. Click OK when the URI template is complete.

This example illustrates the URI Template Builder page.

The screenshot shows the 'URI Template Builder' dialog box. It features an 'Expression Workspace' on the left with options for 'Primitive' (selected) and 'Collection'. The 'Primitive' section shows 'city' selected with a 'Type' of 'String' and an 'Add' button. The 'Collection' section shows 'forecast' selected with an 'Add' button. Below these is an 'Add Explode Modifier' checkbox and an 'Explode Modifier' dropdown set to '*'. A text field contains '{city}' with an 'Append To URI' button. To the right, there are two panels: 'Constant' and 'Seperator', each with a text field and an 'Append To URI' button. At the bottom, the 'URI Template' field contains 'traffic/{state}/' and a 'Validate' button. 'OK' and 'Cancel' buttons are at the bottom left.

For additional information on the URI Template Builder, see [Using the URI Template Builder](#)

Entering Details for the URI Template

Use the URI Template Details page to define the messages for the service operation.

To add or modify the Details for a URI index, click the Details link for that row.

This example illustrates the URI Template Details page.

X
Help

URI Template

weather/{state}/{city}

*Description

This URI Resource will receive flight plan information and return the weather information for the following city.

Type

Request

*Message.Version

QE_FLIGHTPLAN.VERSION_1

View Message

Content-Type

application/json

Type

Response

*Message.Version

QE_FP_MSG.V1

View Message

Content-Type

application/json

Status Code

200

Type

Fault

Message.Version

IB_FAULT.v1

View Message

Content-Type

application/problem+json

Status Code

400

Field or Control	Description
URI Template	The URI Template is displayed.
Description	Enter a description for the URI resource.
Type	Depending on the REST method, the required message types will be available on this page. Types are Request, Response and Fault.
Message.Version	Enter the message name followed by a dot and version, or click the Lookup button to search for a message.

Field or Control	Description
Content-Type	Select the content type. The valid values are: • application/json • application/xml
Status Code	Select the Status Code from the drop down list.

Managing REST Resources

REST Services that are not defined with Open API will produce a WADL. For these services, you do not need to create a root resource.

To access the Service Operations – General page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates the REST Resource Definition section in the Service Operations – General page for a provider REST service operation.

The screenshot shows the 'REST Resource Definition' section. At the top, the 'REST Base URL' is set to 'http://providerserver.example.com:8010/PSIGW/RESTListeningConnector/WeatherStation.v1/'. Below this, a 'URI Template Format Example' is provided: 'weather/{state}/{city}?forecast={day}'. The main part of the interface is a table with columns: 'Index', 'Template', 'Validate', 'Build', and two empty columns with '+' and '-' icons. There are four rows of URI templates. At the bottom, the 'Document Template' is set to 'QE_WEATHERTEMPLATE.v1', and there is a 'View Message' link.

Index	Template	Validate	Build		
1	weather/{state}/{city}?forecast={day}	Validate	Build	+	-
2	weather/{state}/{city}	Validate	Build	+	-
3	weather/{state}	Validate	Build	+	-
4	weather/{country}/{state}/{city}?forecast={day}	Validate	Build	+	-


Document Template: QE_WEATHERTEMPLATE.v1 [View Message](#)

Use this section to add one or more template URI strings to define one or more resources for the service operation definition.

A URI template format example appears just about the URI grid for you to use as a guide for building URI templates.

In the example the URI grid shows that there are four URI templates defined for the service operation. The *QE_WEATHERTEMPLATE.v1* value defined in the **Document Template** field is a Document type message. The message contains the primitive elements to supply values for country, state, city and day indicated by the variables {country}, {state}, {city}, and {day} defined in the URI templates.

This example illustrates the primitive elements defined in a sample document called *QE_WEATHERTEMPLATE*.

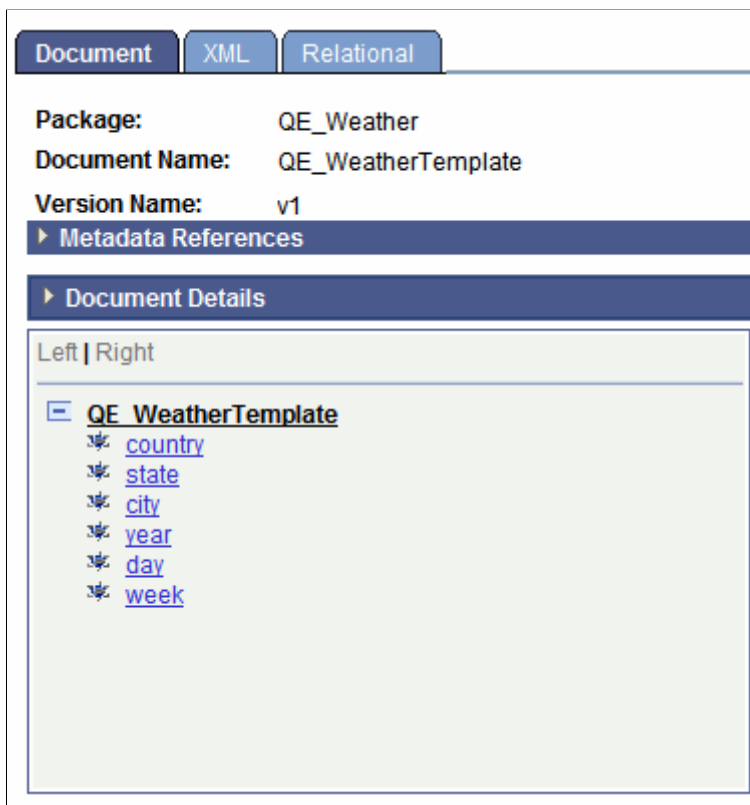

You cannot save a URI template until you define a document template. Note, that when you save the resource definition, the system assigns a sequential URI index to each URI template.

You can build the manually enter the URI or use the URI Template Builder. To use the URI Template Build, see [Using the URI Template Builder](#).

Building URI Templates Manually

To manually build a URI template enter the URI string in the **Template** field in the REST Resource Definition section of the Service Operations – General page. The URI template expressions supported are described earlier in this topic.

To access the page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates two URI templates added to a REST resource definition for a provider service.

The screenshot shows the 'REST Resource Definition' page. At the top, the 'REST Base URL' is 'http://providerserver.example.com:8010/PSIGW/RESTListeningConnector/weatherstation.v1/'. Below it, the 'URI Template Format Example' is 'weather/{state}/{city}?forecast={day}'. The main part of the page is a table with the following data:

Index	Template	Validate	Build	
1	weather/{state}/{city}?forecast={day}	Validate	Build	+ -
	weather/{state}/{city}	Validate	Build	+ -
	weather/{state}	Validate	Build	+ -

At the bottom, the 'Document Template' is 'QE_WEATHERTEMPLATE.v1' and there is a 'View Message' link.

This example shows two URI template strings added to template, `weather/{state}/{city}` and `weather/{state}`. Note that neither of the added URI strings has an index value. When the page is saved, the system assigns a sequential index values to each URI string added.

To manually build a URI template:

1. Access the REST Resource Definition section on the Service Operations – General page.

To access the page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

2. In the URI grid, click the **Add a Row** button (+) to add a row for the template.
3. Manually enter the URI string.
4. Click the **Save** button.

Using the URI Template Builder

Using the URI Template Builder page (IB_URIBUILDER_SEC) to build URI templates can simplify building complex or lengthy URIs.

The steps to build a URI template using the URI Template Builder page vary, depending on the document template defined and the business requirements and goals of each URI template.

To build a URI template using the URI Template Builder you must first define a document template in the resource definition. The document template must contain the values for the variables you plan to build out in the URI template.

To access the URI Template Builder select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**. The Service Operations – General page appears. In the REST Resource Definition section of the page, click the **Build** link.

This example illustrates the URI Template Builder page.

URI Template Builder

Help

?

Expression Workspace

?

Expression Type

Simple String

Primitive

country

Type String

Add

Collection

forecast

Add

☐ Add Explode Modifier

Explode Modifier *

Append To URI

Constant

Append To URI

Seperator

Append To URI

URI Template

weather/{state}/{city}

Validate

The URI Template Builder features three sections for building a URI template:

Field or Control	Description
Expression Workspace	Use this section to build the expression. The system reads the document template defined for the resource definition and makes the primitive and collection variable elements defined in the document available to build the URI. After you build an expression click the Append to URI button to add it to the URI Template field at the bottom of the page.
Constant	Use this section to define constants and then append them to the URI Template field at the bottom of the page.
Separator	Use this button to append the value in the URI Template field with a forward slash ("/").

The following fields and controls appear on this page:

Field or Control	Description
Expression Type	Select an expression type from the drop-down list. The values are: • <i>Form-Style (Continuation).</i> Not available for OpenAPI REST Service Operation. • <i>Form-Style (Expansion).</i> • <i>Fragment.</i> Not available for OpenAPI REST Service Operation. • <i>Label.</i> • <i>Path-Segment.</i> Not available for OpenAPI REST Service Operation. • <i>Path-Style.</i> • <i>Reserved.</i> Not available for OpenAPI REST Service Operation. • <i>Simple String.</i> (Default.) The default is Simple String. See Understanding URI Template Expressions and Expansions
Primitive	Select the control to build an expression based on a primitive element contained in the document template. After you select the control select a primitive element from the drop-down list. By default this control is enabled.
Type	This read only field displays the data type of the primitive element selected.
Add	Click the button to add the selected primitive or collection element to the expression field at the bottom of the Expression Workspace.
Collection	Select the control to build an expression based on a collection element contained in the document template. After you select the control select a collection element from the drop-down list. Click the Add button to add the element to the expression field.

Field or Control	Description
Explode Modifier	This control becomes enabled after you add a collection element to the expression field. Select an explode modifier from the drop-down list and click the Explode Modifier box to add it to the collection element in the expression field. Currently, the asterisk explode modifier (“ * “) is the only explode modifier supported.
Append To URI	Click the button to append the URI Template field with the expression, constant, or separator.
Constant	Enter a constant value to append to the URI.
URI Template	Displays the URI template string.
Validate	Click the button to access the Validate URI page to validate the URI template string.
OK	Click the button to populate the Template field in the resource definition with the value in the URI Template field and to return to the Service Operations – General page.
Cancel	Click the button to exit the URI Template Builder page without saving any information.

Building the URI Template Example

This section provides examples for building the URI Template.

To build a URI template using the Template Builder:

1. Select the Document Template.

Note: The document template must contain the values for the variables you plan to build out in the URI template.

2. For OpenAPI REST Service Operation add the root resource.
3. Select the Root Resource from the drop down list.
4. Click the Build link for the resource.
5. The root is displayed in the URI Template field.
6. In the Separator section click Append to URI or enter a / (slash).
7. In the Expression Workspace section, select the control to use Primitive or Collection.

8. Select the Primitive or Collection value from the drop down list.
9. Click Add.

The element is added in brackets in the Expression Workspace.

10. Click Append to URI.
11. If you are adding another parameter, click the Add Separator then repeat steps 4 to 7.
12. After adding all the parameters, click OK.

Example Primitives

To add primitives:

1. In the Expression Workspace, from the **Expression Type** drop-down list, select *Simple String*.
2. Click **Primitive**. and from the **Primitive** drop-down list, select *state* and click the **Add** button

The {state} expression appears in the expression field.

3. Select the primitive from the drop-down list.
4. Click **Add** button.

The primitive is shown in brackets in the Expression Workspace.

This example illustrates the Expression Workspace for adding a primitive.

The screenshot shows the 'Expression Workspace' dialog box. At the top, there is a title bar with a question mark icon. Below the title, the 'Expression Type' is set to 'Simple String'. Underneath, there are two radio buttons: 'Primitive' (selected) and 'Collection'. For the 'Primitive' section, there is a 'Primitive' dropdown menu showing 'country', a 'Type' dropdown menu showing 'String', and an 'Add' button. For the 'Collection' section, there is a 'Collection' dropdown menu showing 'forecast' and a disabled 'Add' button. Below these, there is a checkbox for 'Add Explode Modifier' which is unchecked, and an 'Explode Modifier' dropdown menu showing '*'. At the bottom, there is a text field containing '{country}' and an 'Append To URI' button.


5. Click Append to URI to add the primitive to the URI Template.

Example Collection

To add a collection:

1. In the Expression Workspace, select Collection.
2. Use the Collection drop down list to select the collection from the Document Template.
3. Click Add.
4. Select Add Explode Modifier if applicable.

This example illustrates the Expression Workspace when adding a collection to the URI.

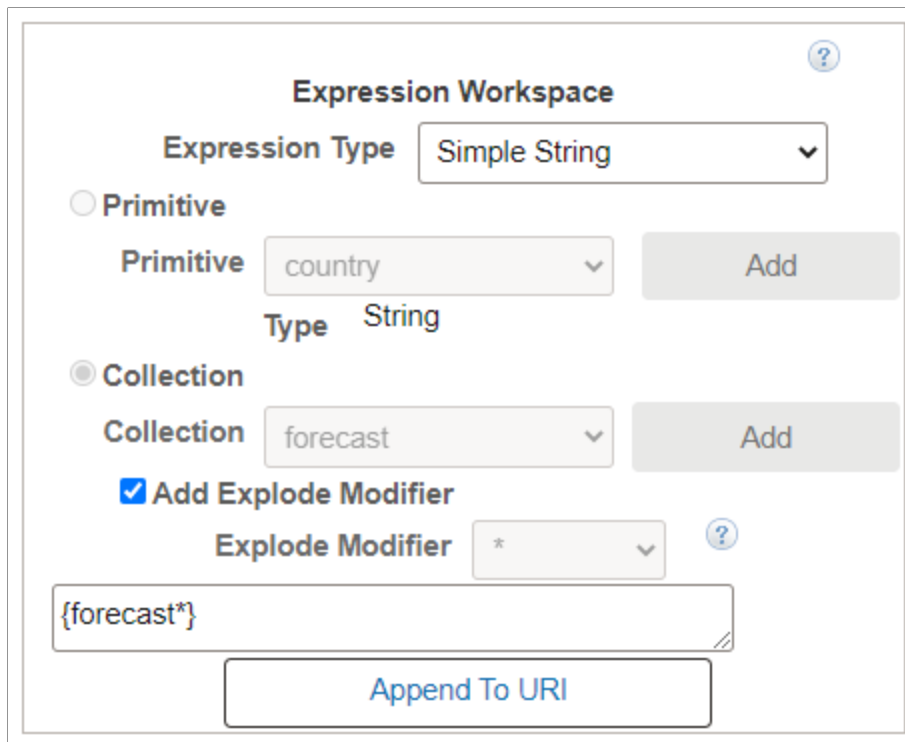

The screenshot shows the 'Expression Workspace' dialog box. At the top, there is a title bar with a question mark icon. Below the title, the 'Expression Type' is set to 'Simple String'. There are two radio buttons: 'Primitive' (unselected) and 'Collection' (selected). Under 'Primitive', there is a 'Primitive' dropdown set to 'country', a 'Type' dropdown set to 'String', and an 'Add' button. Under 'Collection', there is a 'Collection' dropdown set to 'forecast' and an 'Add' button. Below these, there is a checked checkbox for 'Add Explode Modifier' and an 'Explode Modifier' dropdown set to '*'. A text input field contains the expression '{forecast*}'. At the bottom, there is a large blue button labeled 'Append To URI'.


5. Click Append to URI.

Example Constant

To add a constant to the URI:

1. In the Constant section, enter the constant value.

This example illustrates the Constant section.

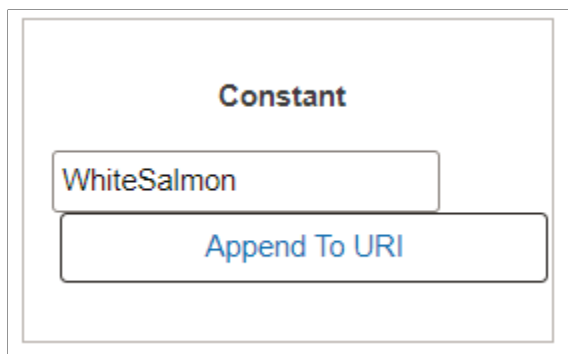

2. Click **Append to URI** button.

The string is added to the **URI Template** field and the template is complete.

Validating URI Templates

After you construct a URI template you can verify the URL produced by using the Validate URI page (IB_SVCVERIFY_SEC). Use the Set Value page (IB_LSTESTER_SEC) to set test values for the URL.

To access the Validate URI page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions** and click the **Validate** link next to the URI template for the URL to validate.

This example illustrates the Validate URI page. You can find definitions for the fields and controls later on this page.

Validate URI

Package QE_Weather

Document QE_WeatherTemplate

Version v1

Left | Right

QE_WeatherTemplate

- country
- state
- city
- year
- day
- week
- forecast
 - period

URI Template weather/{state}/{city}

[Generate URL](#) ☐ SSL

URL

The Validate URI page displays the document information and the elements defined in the document template specified for the REST resource definition.

The name of the URI template that is selected for validation appears in the **URI Template** field. In the previous example, the following URI template appears in the URI Template field and is selected for validation:

```
weather/{state}/{city}?forecast={day}
```

To validate the URI template, you click each element in the document tree that corresponds to each variable in the URI template, and enter a test value for use in validation using the Set Value page.

Note: Using the Set Value page is described in the next section.

After you assign a test value for a template, the test value appears next to the element in the document tree.

After you enter test values click the Generate URL button to generate a URL to test.

This example illustrates the Validate URI page containing a generated URL.

Validate URI

Package QE_Weather

Document QE_WeatherTemplate

Version v1

Left | Right

QE_WeatherTemplate

- country
- state - FL
- city - Naples
- year
- day
- week
- forecast
- period

URI Template weather/{state}/{city}

☐ SSL

URL http://providerserver.example.com:8010/PSIGW/RESTListeningConnector/N1/flightinformation.v1/weather/FL/Naples

Field or Control	Description
Package	Package name in which the document is defined.
Document	Document name.
Version	Document version.
Document Tree	Displays the element defined in the document template. Click an element name to access the Set Value page and to set test values for the element.
URI Template	This field displays the URI template string created using the URI Template Builder page.
Generate URL	Click the button to generate a URL based on the test values entered.


Field or Control	Description
URL	After you click the Generate URL button, this field displays the generated URL.
Return	Click the button to return to the URI Template Builder page.

Using the Set Value Page

Use the Set Value page to enter test values for URI template validation.

When you click an element in the document tree on the Validate URI page, the Set Value page (IB_LSTESTER_SEC) appears.

This example illustrates the fields and controls on the Set Value page. You can find definitions for the fields and controls later on this page.

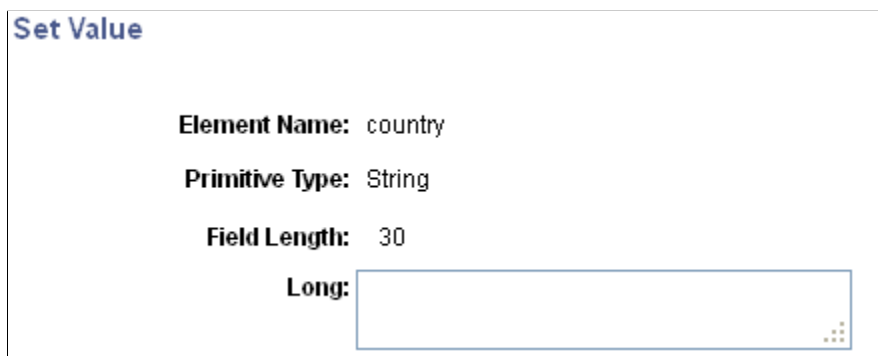

Set Value

Element Name: country

Primitive Type: String

Field Length: 30

Long:

The Set Value page provides information about the primitive element selected to assist you in providing a useful value to test. The information that appears varies, depending on the primitive type for which you are providing a value. After you set a test value for an element, the test value appears next to the element name on the document tree.

The **Element Name** field displays the element name with which you're working.

In the example, the **Primitive Type** field and **Field Length** field display the data type and length as defined for the element in the document.

The name of the field where you enter a test value depends on the data type. In the previous example, the data type is a string, and therefore the system prompts you to enter a **Long** value.

The following table lists the possible labels for the field where you enter a test value:

Data Type	Primitive Type Field Label	Test Value Field Label
Binary	Bin	Long
Boolean	Bool	Page displays a check box.

<i>Data Type</i>	<i>Primitive Type Field Label</i>	<i>Test Value Field Label</i>
Character	Character	Char
Date	Date	Date
DateTime	DT	Datetime
Decimal	Dec	Numeric
Integer	Int	Numeric
String	String	Long
Text	Text	Long
Time	Time	Time

When you have defined test values for all variables in the URI template, click the **Generate URL** button to generate a URL based on the test values you entered.

Defining REST Service Operation Version Information

This section discusses how to:

- Define default REST service operation versions.
- Define message instances for REST service operations.
- Define fault messages for REST service operations.

Understanding Default REST Service Operations

When you first create a service operation definition, the definition that you initially define is the default version.

Note: OpenAPI REST Service Operations are not versioned.

When the newly created service operation definition opens, the **Default** check box is enabled and is read-only.

You can subsequently define additional service operation versions and assign them as the default.

See [Managing Service Operation Versions](#).

Defining Default REST Service Operation Versions

To define the REST service operation default version:

1. Access the Service Operations - General page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**).
2. In the **Version** field, enter a version identifier.

The default is *v1*.

3. (Optional) In the **Version Description** field, enter a description for the operation version.

If you enter no information, the description by default is the name of the service operation when you save the definition.

4. (Optional) In the **Version Comments** check box, enter comments about the version.
5. (Optional) Select the **Runtime Schema Validation** check box to enable service schema validation at runtime.
6. (Optional). In the Routing Actions Upon Save box, check the **Generate Local-to-Local** routing box to generate the routing when you save the service operation definition.

Note that the **Any-to-Local** box is read-only and selected by default and an any-to-local routing is created upon save.

This box only appears when working with provider service operations.

More information about routing definitions for provider REST services is available in the product documentation.

See [Managing Provider REST Service Operations](#)

Continue to the next section to specify messages for service operations. You cannot save the service operation definition until you define messages for it.

Defining Message Instances for REST Service Operations

You specify messages for service operations in the Message Information section of the Service Operations – General page.

The messages that you specify define the structure of the data that is contained in the service operation.

The REST method type determines the number of messages and message types (request or response) that you specify. The possible request and response message combinations by REST method type are described elsewhere in this topic.

To specify messages for a REST service operation:

1. Locate the Message Information section on the Service Operations – General page.
2. Locate the **Type** field, and take note of the message type to define.

3. In the **Message.Version** field, enter the message name followed by a dot and version, or click the **Lookup** button to search for a message.

After you select the message, you can click the **View Message** link to view the message.

4. From the **Content-Type** drop-down list, select the MIME content type for the message. The valid values are:

- *application/json*
- *application/xml*
- *text/xml*
- *text/plain*
- *text/html*

5. (Optional) Define optional content-types.

To define optional content-types:

- a. Click the **Optional Content-Types** link.

The Set Content Type page appears.

- b. Type in any content type or select a content type from the **Content-Type** drop-down list.

The valid values from the **Content-Type** drop-down list are the same as those listed in Step 4.

- c. To add additional content-types, click the **Add Row** button (+) and type in a content type or select a content-type from the list.

- d. Click the **OK** button.

The Service Operations – General page appears.

6. From the **Status Code** drop-down list, select the HTTP response code to return to the integration partner.

Note that the content-type defines the acceptable HTTP media type.

The valid HTTP status code values are:

- *200* - Default.
- *201* - This value is valid only when the REST method is Post.
- *202*
- *203* - This value is valid only when the REST method is Get.
- *204*
- *205*

- 206
- 207

7. (Optional) Define optional status codes.

You can defined optional status codes on response messages only.

To define optional status codes:

- a. Click the **Optional Status Codes** link.

The Set Status Codes page appears.

- b. From the **Status Code** drop-down list, select a status code.

The valid values are the same as those listed in Step 6.

- c. To add additional status codes, click the **Add Row** button (+) and select a status code from the list.

- d. Click the **OK** button.

The Service Operations – General page appears.

8. Repeat steps 1 through 7 for each message type that appears in the Message Information section.

9. Click the **Save** button.

Defining Fault Messages for REST Service Operations

This section describes how to specify fault messages for REST service operations.

Understanding Fault Messages for REST Service Operations

You can specify fault messages for service operations for error handling.

Note the following about fault messages:

- You cannot add fault messages to asynchronous service operations.
- Fault messages must be nonrowset-based messages, container messages, or document messages. Fault messages cannot be rowset-based messages.

Understanding Fault Message HTTP Return Status Codes for REST Service Operations and the OnError Method

The system recognizes and uses fault message HTTP status codes only if the fault Message is used in the OnError method. Simply using the fault message within the OnRequest method will be treated like any other message.

Understanding Fault Message HTTP Return Status Codes and Service System Status for Provider REST Service Operations

If you specify fault messages for provider REST service operations, the service system status impacts the HTTP return status codes as follows:

<i>Field or Control</i>	<i>Description</i>
Production	If the service system status is set to <i>Production</i>, any errors by the framework or that are not part of a fault message defined in the <code>OnError</code> method will result in an HTTP status code returned of <i>500</i> with the errors <i>not</i> included in the payload. If a fault message is defined on the service operation and invoked within the <code>OnError</code> method, then the status code of <i>400</i> (or any other status code set for the fault) will be returned as the HTTP status code along with the error message.
Development	If the service system status is set to <i>Development</i>, any errors by the framework or that are not part of a fault message defined in the <code>OnError</code> method will result in an HTTP status code returned of <i>500</i> with the error message included in the payload. If the fault message is defined on the service operation and invoked within the <code>OnError</code> method, the status code of <i>400</i> (or any other status code set for the fault) will be returned as the HTTP status code along with the error message.

Defining Fault Messages for REST Service Operations

To define a fault message for a REST service operation:

1. Locate the Default Service Operation Version section on the Service Operations – General tab.
2. Click the **Add Fault Type** button.

A new row appears in which to specify a message. Note that the **Type** field in the new row displays *Fault*.

3. In the **Message.Version** field, enter the message name, or click the **Lookup** button to search for one.

After you select the message, you can click the **View Message** link to view the message.

4. From the **Content-Type** drop-down list, select the MIME content type of the message.

The valid values are:

- *application/json*
- *application/xml*
- *text/xml*

- *text/plain*
- *text/html*

5. (Optional) Define optional content-types.

To define optional content-types:

- a. Click the **Optional Content-Types** link.

The Set Content Type page appears.

- b. Type in any content type or select a content type from the **Content-Type** drop-down list.

The valid values from the **Content-Type** drop-down list are the same as those listed in Step 4.

- c. To add additional content-types, click the **Add Row** button (+) and type in a content type or select a content-type from the list.

- d. Click the **OK** button.

The Service Operations – General page appears.

6. From the **Status** drop-down list, select a status code. The default and only value is *400*.

7. Click the **Save** button.

To delete a fault message, in the Default Service Operation Version section, click the **Delete Fault Type** button. Then click the **Save** button.

Managing REST Service Operation Versions

You can create and use different versions of service operations. The process for managing REST service operation versions is identical to the process for managing non-REST service operation versions.

See [Managing Service Operation Versions](#).

Note: REST resource definition are defined at the service operation level and not the service operation version level. As a result, REST resource definitions cannot be versioned.

Managing Provider REST Service Operations

This section describes configuration tasks and considerations specific to managing provider REST service operations. This section discusses how to:

- Manage target connectors for provider REST service operations.
- Manage messages for provider REST service operations.

- Secure provider REST service operations.
- Add handlers to provider REST service operations.
- Manage routings definitions for provider REST service operations.
- Define routing header properties for provider REST service operations.

Managing Target Connectors for Provider REST Service Operations

Only the HTTP target connector is supported for providing REST service operations.

Managing Messages for Provider REST Service Operations

For a provider REST service operations defined with a nonrowset-based message, the Root Element field on the message definition must be populated. The root element value you specify is used for proper WADL generation.

Related Links

[Creating Message Definitions](#)

Securing Provider REST Service Operations

This section discusses securing provider REST service operations.

Requiring Secured Inbound Consumer Requests

When you create provider REST services you can set the level of security with which inbound service operations must be sent using options in the Req Verification drop-down list on the Service Operations page. If you set a required inbound security level and inbound messages do not meet the requirement, the messages are rejected.

The following security levels are supported for provider REST service operations:

- *Basic Authentication.*
- *Basic Authentication and SSL.*
- *None.* (Default).
- *OAuth2 Authentication*
- *OAuth2 Authentication and SSL*
- *PeopleSoft Token*
- *PeopleSoft Token and SSL*
- *SSL.*

See “Understanding OAuth 2.0” (Security Administration).

Setting Permissions for Provider REST Service Operations

Provider REST service operations are secured using permission lists. The process for setting permissions for provider REST service operations is identical to the process for setting permissions for non-REST service operations.

See [Setting Permissions to Service Operations](#).

See “Validating Security on Inbound Integrations” (Integration Broker Administration).

Adding Handlers to Provider REST Services Operations

The only Handler Type available for provider REST services is the OnRequest handler and the handler is implemented as an application class. The application class is implemented as any other OnRequest integration broker event.

Implementing handlers is discussed in greater detail elsewhere in the product documentation

See [Understanding Service Operation Handlers](#).

See [Using PeopleCode to Manage REST Service Operations](#).

Managing Routing Definitions for Provider REST Service Operations

This section discusses how to manage routing definitions for Provider REST service operations.

Working with System-Generating Routing Definitions for REST Service Operations

An any-to-local routing is always created for a provider REST service operation when you initially save the service operation definition. The routing name is a system-generated name with the format *~GENERATED~<unique number>*. You cannot delete this system-generated routing, but you can inactivate it. You can also regenerate the any-to-local routing in the Routing Actions Upon Save section on the Service Operations-General tab. Note that if you regenerated the routing any request or response headers previously defined will be deleted.

You can also generate a local-to-local routing for any REST-based service operation in the Routing Actions Upon Save section on the Service Operations-General tab. You may also inactivate local-to-local routings you create for a REST service.

Any-to-local and local-to-local routing types are discussed elsewhere in the product documentation.

See [Routing Types](#).

You cannot create point-to-point routings for REST-based service operations.

Additional information about configuring and working with routing definitions is described elsewhere in the product documentation.

Related Links

[Managing System-Generated Routing Definitions](#)

[Configuring Routing Definitions](#)

[Activating and Inactivating Routing Definitions](#)

Defining Properties for Provider REST Service Operation Application Class

For Integration Broker, there are two properties that can be defined for a REST provider Service Operation Application Class. These two properties, when implemented, can override the Content Type and Response Code for the OnError event.

The application package: PS_PT application package,

method IRequestHandler defined in its comments refers to these properties and how to use them.

If an error occurs the OnError method, if implemented, will be automatically invoked. The type of exception can be viewed by using the Message object to retrieve the Exception object (&Message.IBException).

Please see the PeopleCode Language Reference guide for more information about the Exception class.

OnError

The return string of this method is used for a custom error message back to the sender (if it's not PeopleSoft). If the request was via SOAP then the string will be wrapped in a SOAP FAULT and returned. If the string itself is SOAP then it will not be wrapped but sent back as is.

Note that the return string is optional, in that if the string is null then the Integration Broker runtime will handle the error.

OnError Functionality (REST Based Service Only)

The Response Code and Content Type will be automatically set based on the value defined for the Fault Message on the Service Operation Definition. These can be overridden by setting the property OnErrorHttpStatusCode and/or the property OnErrorContentType.

```
*/

interface IRequestHandler
    method OnRequest(&message As Message) Returns Message;
    method OnError(&request As Message) Returns string;
    property integer OnErrorHttpStatusCode;
    property string OnErrorContentType;
end-interface;
```

The following example illustrates how to invoke these properties using the OnError method:

```
import PS_PT:Integration:IRequestHandler;

class WeatherData implements PS_PT:Integration:IRequestHandler
    method WeatherData();
    method OnRequest(&MSG As Message) Returns Message;
    method OnError(&request As Message) Returns string;
    property integer OnErrorHttpStatusCode;
    property string OnErrorContentType;

    /* constructor */
    method WeatherData
    end-method;

    method OnRequest
        /* &MSG as Message */
        /* Returns Message */
        /* Extends/implements PS_PT:Integration:IRequestHandler.OnRequest */
        /* Variable Declaration */
        ....
```

```

Return &response;

end-method;

method OnError
    /* &request as Message */
    /* Returns String */
    /* Extends/implements PS_PT:Integration:IRequestHandler.OnError */
    Local Message &Fault_Msg;

    /* Create the fault string exception based on the proper format to be sent ba⇒
ck */

    /* Override the content type and Response Code in this case
    %This.OnErrorHttpStatusCode = 405;
    %This.OnErrorContentType = "application/json";

    Return <The fault string>;

End-If;

end-method;

```

Defining Routing Header Properties for Provider REST Service Operations

On provider REST-based service operations the any-to-local routing definition features a Header Properties page (IB_ROUTINGRESTPROP) where you add request message and response headers to the service operation. The headers are shown in the generated WADL document for the service operation.

To access the Header Routings page Routings-Header Properties page select **PeopleTools > Integration Broker > Integration Setup > Routings** and click the **Header Properties** tab.

This example illustrates the Routings – Header Properties page. The example shows the header properties for a system-generated any-to-local routing for a REST-based provider service operation.

Routing Definitions
Parameters
Header Properties

Routing Name: ~GENERATED~48593706

Request Headers
Personalize | Find | View All | First 1-3 of 3 Last

Property Name	Comment		
Accept-Charset	Character sets that are acceptable: utf-8	+	-
Accept-Language	Acceptable languages for response en-US	+	-
If-Modified-Since	Allows a 304 Not Modified to be returned if content is	+	-

Response Headers
Personalize | Find | View All | First 1-6 of 6 Last

Property Name	Value	Comment		
Allow	GET, HEAD, DELETE, P	Valid actions for a	+	-
Content-Language	Eng	The language the content	+	-
Date		The date and time that the	+	-
Expires		Gives the date/time after	+	-
Host	//kcollins-t61	Transaction Server	+	-
Warning		A general warning about	+	-

The request and response headers that you can add are standard HTTP request and response header fields. There are several sources for additional information and descriptions of HTTP header fields. One such source is the World Wide Web Consortium (W3C).

See [World Wide Web Consortium](#).

Note: If you regenerate a routing any header fields defined for the routing are deleted and you must recreate them.

You also use this page to define compression on provider service operations requests and responses.

See [Setting Compression for REST Service Operations](#).

Use the LoadRESTHeaders method of the IBInfo class to load the response and request headers at runtime.

See [Using PeopleCode to Manage Provider REST Service Operations](#).

Adding Request Header Properties

To add a request header property:

1. Access the Routings-Header Properties page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Header Properties** tab).
2. In the Request Headers section of the page, click the **Add Row** button (+) to add a row.
3. In the **Property Name** field, click the **Lookup** button and select a property to add.
The system adds the property to the grid.
4. In the **Comments** field, enter a comment about the property.
5. Repeat steps 2–4 to add additional request header properties.
6. Click the **Save** button.

Adding Response Header Properties

To add a response header property:

1. Access the Routings-Header Properties page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Header Properties** tab).
2. In the Response Headers section of the page, click the **Add Row** button (+) to add a row.
3. In the **Property Name** field click the **Lookup** button and select a property to add.
The system adds the property to the grid.
4. In the **Value** field enter a value for the property.
5. In the Comment column enter a comment for the property.
6. Repeat Steps 2–5 to add additional response header properties.

7. Click the **Save** button.

Managing Consumer REST Service Operations

This section describes configuration tasks and considerations specific to managing consumer REST service operations. This section discusses how to:

- Add handlers to consumer REST service operations.
- Manage routing definitions for consumer REST service operations.
- Secure consumer REST service operations.

Adding Handlers to Consumer REST Service Operations

There are no handlers for consumer REST service operations. You may add connector properties to consumer service operations on the routing definition using the Routings-Connector Properties page or add them dynamically by using PeopleCode.

See [Defining and Overriding Gateway and Connector Properties Using PeopleCode to Manage REST Service Operations](#).

Compressing Data for Consumer REST Service Operations

By default, the data is sent out of the HTTP Target Connector uncompressed for REST Consumer Transactions. To send compressed data, use:

(via PeopleCode)

```
&MSG.IBInfo.CompressionOverride = %IntBroker_Compress
```

or the size of the data is larger than the value set in PSADMIN.

and

(via PeopleCode)

```
&MSG.IBInfo.LoadRESTHeaders();
&MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("sendUncompressed", "N", %Header⇒
).
```

Manage Routing Definitions for Consumer REST Service Operations

The system creates a single outbound local-to-WADL node routing when you initially save a consumer REST service operation. The routing name is a system-generated name with the format *~GENERATED~<unique number>*. You cannot delete this system-generated routing but you can inactivate it.

Related Links

[Managing System-Generated Routing Definitions](#)

[Configuring Routing Definitions](#)

[Activating and Inactivating Routing Definitions](#)

Securing Consumer REST Service Operations

A PeopleSoft REST service operation provider may require that consumer services be sent secured. PeopleSoft REST providers may communicate to you that they require consumer REST service operation be secured using SSL, basic authentication, or basic authentication and SSL.

Securing Consumer REST Requests Using SSL/TLS

You can determine any SSL requirement based on the REST base URL the provider supplies and as defined on the Service Operations – General page. If the URL is a Hypertext Transfer Protocol Secure URL (HTTPS), then the provider has implemented SSL and your consumer request must also be sent using the SSL protocol. Information for setting up SSL/TLS is provided elsewhere in the product documentation.

See “Implementing Web Server SSL/TLS Encryption” (Security Administration).

Securing Consumer REST Requests Using Basic Authentication

If a PeopleSoft REST provider system is defined in your integration network, you can use basic HTTP authentication or PeopleSoft tokens to secure consumer requests and the PeopleSoft providing system accepts the requests as meeting the basic authentication requirement. When using PeopleSoft tokens, the system sends the token as an HTTP header property as part of the request. This behavior allows you to securely pass user credentials for proper authentication instead of using basic authentication which requires that you set an external user name and external password on the routing. If the provider has basic authentication selected for inbound security verification and no PeopleSoft token or basic authentication credentials are passed, a basic authentication pop-up window appears and the user must enter his or her credentials at that time. The PeopleSoft token option is a way to not have to prompt for user credentials for PeopleSoft-to-PeopleSoft integrations.

If a PeopleSoft REST provider is not in your integration network and the provider requires inbound basic authentication, you cannot secure the request with a PeopleSoft token. The providing system will reject such a request. You must secure the request using basic HTTP authentication.

If the consumer system is a third-party system and the provider requires inbound basic authentication, the third-party system must secure the request using basic HTTP authentication.

You specify basic HTTP authentication for a consumer outbound request on the routing definition on the Routings – Parameters page (IB_ROUTINGDEFNDOC). The Parameters section for the outbound request features a **WS Security** link that enables you to set the security level for the outbound consumer request.

To access the Routings – Parameters page select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Parameters** tab.

This example illustrates the Routings – Parameters page. Click the **WS Security** link to set the security level for outbound requests.

Routing Name ~GENERATED~93919796

Service Operation QE_WEATHERSTATION_CONSUME_GET

Service Operation Version v1

Sender Node QE_LOCAL

Receiver Node WADL_NODE

Parameters

Type Inbound Response

External Alias QE_WEATHERSTATION_CONSUME.v1 [Alias References](#)

Message.Ver into Transform 1

Transform Program 1

Transform Program 2

Message.Ver out of Transforms

Type Outbound Request

External Alias QE_WEATHERSTATION_CONSUME.v1 [Alias References](#)

[WS Security](#)

Message.Ver into Transform 1

Transform Program 1

Transform Program 2

Message.Ver out of Transforms

When you click the **WS Security** link the Routing Security page (IB_ROUTINGDEFN_SEC) appears.

This example illustrates the Routing Security page.

Routing Security

***Authentication Option:**

Use **Authentication Option** drop-down list to select the authentication option for the request. If you select basic authentication as the authentication option, **External User ID** and **External Password** fields appear and you must enter the external user ID and password values as furnished by the provider.

This example illustrates the Routing Security page. The example shows the page when *Basic Authentication* is selected as the authentication option

Keep in mind that in addition to basic authentication, the provider may require that you send the request secured by SSL.

To secure a REST consumer request using basic authentication:

1. Access the Routings-Parameters page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Routing Definitions** and click the **Parameters** tab).
2. In the parameters section for the outbound request, click the **WS Security** link.

The **Routing Security** drop-down list appears:

3. From the **Authentication Option** drop-down list, select an authentication method. The options are:

- *Basic Authentication.*

If you select this option, go to step 4.

- *None. (Default)*

If you select this option, go to step 6.

- *PeopleSoft Token.*

If you select this option, go to step 6.

4. In the **External User ID** field, enter the ID furnished to you by the REST provider.
5. In the **External Password** field, enter the password furnished to you by the REST provider.
6. Click the **OK** button.

Securing Consumer REST Requests Using OAuth2 Authentication

If a REST Provider uses IDCS or AZURE for their authentication server, then you can create a Service Application under OAuth2 Administration. See Security link for configuration of OAuth2 “Understanding OAuth 2.0” (Security Administration). Once configured, the http header can be added to the Message prior to performing the SyncRequest.

The following code example shows how to add the OAuth2 token to the http header.

```
import PT_SECURITY:OAuth2:*;
Local PT_SECURITY:OAuth2:SEC_AUTHTOKEN &auth;
&auth = create PT_SECURITY:OAuth2:SEC_AUTHTOKEN();
```

```
&ret = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("Authorization", "Bearer =>
" | &auth.GetAccessToken(<service application name>), %HttpHeader);
```

Related Links

“Validating Security on Inbound Integrations” (Integration Broker Administration)

“Understanding OAuth 2.0” (Security Administration)

Sending and Receiving Binary Data for Consumer REST Service Operations

When sending encoded binary data for REST consumer-based service operations, you must use the HTTP target connector. The HTTP listening and target connectors provide a web-standard method for an integration gateway to exchange messages with both PeopleSoft and third-party applications. See “Using the HTTP Target Connector” (Integration Broker Administration).

Http Properties to send and receive binary data:

- Base64toBinary
- Response-Binary

Sending Binary Data for Consumer REST Service Operations

To send binary data the developer must base64 encode the binary data add it to the message via &MSG.SetContentString(). The Developer must also set the http property as follows:

```
&bRet = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("Base64toBinary", "Y", %=>
HttpProperty);
```

Receiving Binary Data for Consumer REST Service Operations

To receive binary data the developer must set this http property as follows:

```
&bRet = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("Response-Binary", "Y", =>
%HttpProperty);
```

The data returned in the message will be base64 encoded.

```
&MSG.GetContentString();
```

The developer will first need to decode the data to get the actual binary data.

To allow HTTP target Connector to accept binary response data, check for the following response content types:

- application/octet-stream
- application/x-binary

However, for the following response content types, there is no need to set the Response-Binary http property as Integration Broker will treat the data as binary and base64 it:

- application/octet-stream

- application/x-binary
- image

Related Links

[Sending and Receiving Binary Data](#)

Setting Compression for REST Service Operations

This section discusses how to:

- Set compression for provider REST service operations.
- Set compression for consumer REST service operations.

Understanding Setting Compression for REST Service Operations

PeopleSoft supports gzip and base64 (deflate) compression.

A REST service operation provider may request that inbound consumer requests be compressed using gzip or base64 (deflate) compression. The consumer is not required to send the data compressed.

The provider specifies the compression preference and the type of compression that the provider system can process on the routing definition using the [Routings – Header Properties](#) page. The compression preferences are then included in the WADL document that the provider furnishes to the consumer. The REST consumer can then view the compression preferences of the provider.

A REST service operation consumer may specify that a response from the provider be compressed using gzip or base64 (deflate) compression. The consumer specifies this request on the outbound request routing definition using the [Routings – Connector Properties](#) page. The compression requirement for the provider response is then included in the HTTP target connector headers. The REST provider can then ensure that its response meets the compression requirement of the consumer.

Setting Compression for Provider REST Service Operations

This section discusses how to set compression for Provider REST service operations.

Understanding Setting Compression for Provider REST Service Operations

You use the [Routings – Header Properties](#) page (IB_ROUTINGRESTPROP) to specify the compression method that the providing system will accept on inbound requests from a consumer, as well as the compression method the provider is using on the response to the consumer.

The two properties to use to specify message compression on the provider system are Accept-Encoding and Content-Encoding.

For provider request and response headers set compression as follows:

Field or Control	Description
Provider Request Header	Use the Accept-Encoding property for the Request Header to indicate the compression method the providing system will accept on inbound requests from the consumer. The information you specify here is included in generated WADL documents that you provide consumers. There are no values to select, rather you specify the compression method in the Comments field. The valid compression methods are: • <i>base64 (deflate).</i> • <i>gzip.</i>
Provider Response Header	Use the Content-Encoding property for the Response Header to indicate the compression method used on the outbound response to the consumer. The information you specify here is included in generated WADL documents that you provide consumers. The compression method used should match the compression method that the consumer specifies in the connector properties in the inbound request. The valid values are: • <i>base64 (deflate).</i> • <i>gzip.</i>

Setting Compression for Provider REST Service Operations

Use the Routings – Header Properties page (IB_ROUTINGRESTPROP) to set compression for provider REST service operations. To access the page, select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Header Properties** tab.

This example illustrates the Routings – Header Properties page.

The screenshot shows the 'Header Properties' tab in the 'Routing Definitions' section. The page displays the 'Routing Name' as '~GENERATED~17660145'. Below this, there are two tables: 'Request Headers' and 'Response Headers'. The 'Request Headers' table has columns for 'Property Name' and 'Comment'. It contains one row with 'Accept-Encoding' as the property name and 'gzip or base64(deflate)' as the comment. The 'Response Headers' table has columns for 'Property Name', 'Value', and 'Comment'. It contains one row with 'Content-Encoding' as the property name, 'base64(deflate)' as the value, and 'Response compression' as the comment. Both tables have a 'Find' button and a 'View All' button. The 'Request Headers' table also has a 'Personalize' button and a 'First' button. The 'Response Headers' table also has a 'Personalize' button and a 'First' button. The 'Request Headers' table has a '1 of 1' indicator. The 'Response Headers' table has a '1 of 1' indicator. Both tables have a 'Last' button.

The previous example shows that the Request Header is set to Accept-Encoding and that the provider will accept requests that are gzip or base64 (deflate) compressed. The example shows that the Response Header is set to Content-Encoding and that the provider will send its response to the consumer base64 (deflate) compressed.

To set compression for provider REST service operations:

1. Access the Routings–Header Properties page:
 - a. Select **PeopleTools > Integration Broker > Integration Setup > Service Definitions** and in the Existing Operations section click the name of the service operation. The Service Operations – General page appears.
 - b. Click the **Routings** tab and in the Routing Definitions grid click the name of the routing definition. The Routing-Definitions page appears.
 - c. Click the Header Properties tab.

2. Set the request header.

In the Request Headers section:

- a. In the **Property Name** field click the **Lookup** button and choose *Accept-Encoding* from the list.
- b. In the **Comment** field enter a comment regarding the compression method the provider system will accept for the inbound request from the consumer.

3. Set the response header.

In the Response Headers section:

- a. In the **Property Name** field click the **Lookup** button and choose *Content-Encoding* from the list.
- b. In the **Value** field click the **Lookup** button and choose the compression used for the response message to the consumer. The valid values are *base64 (deflate)* or *gzip*.

4. Click the **Save** button.

The other options featured on the Routings – Header Properties page are discussed elsewhere in the product documentation.

See [Defining Routing Header Properties for Provider REST Service Operations](#).

Defining Compression for Consumer REST Service Operations

This section discusses how to define compression for consumer REST service operations.

Understanding Setting Compression for Consumer REST Service Operations

A WADL document furnished to a REST consumer by a REST provider indicates if requests must be compressed and if so the compression method the provider system accepts. In addition, as a REST consumer you may require that responses from the provider be compressed and that the system can handle a specific compression method.

The two properties to use to specify message compression on consumer systems are Accept-Encoding and Content-Encoding.

For consumer request and response headers set compression as follows:

Field or Control	Description
Consumer Response Headers	Use the Accept-Encoding property to indicate to the provider the compression method to use in its response to your consumer system. The valid options are: • <i>base64 (deflate).</i> • <i>gzip.</i>
Consumer Request Headers	Use the Content-Encoding property to indicate to the provider the compression method used on the outgoing request. The valid options are: • <i>base64 (deflate).</i> • <i>gzip.</i>

Setting Compression for REST Consumer Service Operations

You use the Routings – Connector Properties page (IB_ROUTINGRESTCPRP) to specify the compression method used for the outbound request and the compression method(s) the system can accept for the provider's response.

To access the Routings – Connector Properties page, select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.

This example illustrates the Routings – Connector Properties page.

Routing Definitions
Parameters
Connector Properties
Routing Properties

Routing Name ~GENERATED~66965849

Service Operation QE_WEATHERSTATION_CONSUME_POST

Service Operation Version v1

Gateway ID LOCAL

Connector ID HTTPTARGET

***Delivery Mode** Guaranteed Delivery

Connector Properties
Personalize Find
First 1-2 of 2 Last

Property ID	Property Name	Value
HEADER	Content-Encoding	base64(deflate)
HEADER	Accept-Encoding	base64(deflate)

The previous example shows that on the REST consumer has set Content-Encoding and Accept-Encoding to *base64 (deflate)*. By setting the Content-Encoding property to *base64(deflate)*, the consumer is indicating that it is sending the consumer request to the provider base64 (deflate) compressed. By setting the Accept-Encoding property to *base64(deflate)*, the REST consumer is indicating to the REST provider that it will accept a response that is base64 (deflate) compressed.

To set compression for consumer REST service operations:

1. Access the Routings – Connector Properties page:
 - a. Select **PeopleTools > Integration Broker > Integration Setup > Service Definitions** and in the Existing Operations section click the name of the service operation. The Service Operations – General page appears.
 - b. Click the **Routings** tab and in the Routing Definitions grid click the name of the routing definition. The Routing-Definitions page appears.
 - c. Click the **Connector Properties** tab.
2. Set the request header.
 - a. In the **Property Name** field click the **Lookup** button and choose *Content-Encoding* from the list.
 - b. In the **Value** field click the **Lookup** button and choose the compression method used for the outbound request. The valid values are *base64 (deflate)* or *gzip*.
3. Set the response header.
 - a. In the **Property Name** field click the **Lookup** button and choose *Accept-Encoding* from the list.
 - b. In the **Value** field click the **Lookup** button and choose the compression method that the provider should use for the response back to the consumer. The valid values are *base64 (deflate)* or *gzip*.
4. Click the **Save** button.

The other options featured on the Routings-Connector Properties page are discussed elsewhere in the product documentation.

See [Defining and Overriding Gateway and Connector Properties](#).

Renaming and Deleting REST Service Operations

You can rename and delete service operations using the Services Operations page in the Service Administration component. The process for renaming and deleting REST service operations is identical to the process for renaming and deleting non-REST service operations.

See [Renaming and Deleting Service Operations](#).

Managing Service Operation Queues

Understanding Service Operation Queues

Service operations queues are used to queue service operations for processing.

Adding Queue Definitions

Use the Queue Definitions page (IB_QUEUEDEFN) to add queue definitions to the system. To access the Queue Definitions page, select **PeopleTools > Integration Broker > Integration Setup > Queue Definitions**.

This example illustrates the Queue Definitions page.

Queue Definitions

Queue Name: QE_PO_QUEUE

Description: QE_PO_QUEUE

Comments:

☒ Archive

☒ Unordered

Queue Status: Run

Object Owner ID: PeopleTool

Operations Assigned to Queue

Service Operations	Version
QE_PO_ARR_XFORM	V1
QE_PO_ASYNC	V1
QE_PO_ASYNC_HUB	V1
QE_PO_ASYNC_NEG	V1
QE_PO_ASYNC_RR	V1
QE_PO_ASYNC_TOSYNC	V1
QE_PO_ASYNC_TOSYNCAlias	V1
QE_PO_ASYNC_XFORM	V1
QE_PO_ATS_XFORM	V1
QE_PO_SRCREC_FALSE	V1

Define Partitioning Fields

Include	Field	Alias Name
☐	QE_BUSINESS_UNIT	
☐	QE_VENDOR_ID	
☐	QE_BUYER_ID	
☐	QE_PO_REF	
☐	QE_PO_ID	
☐	QE_PO_STATUS	
☐	QE_PO_DT	
☒	OPERATIONNAME	
☒	PUBLISHER	
☒	PUBPROC	

Save

Add Field

The **Operations Assigned to Queue** check box displays the names of the service operations assigned to a queue. Click a service operation name to open the service operation definition.

You work with the following page elements when you add a queue.

Field or Control	Description
Queue Name	Enter the name of the queue.
Archive	Select to archive service operation instances that are assigned to the queue. By default, archiving is not enabled. When you enable archiving, you can archive or delete transactions in the Asynchronous Details component of the Service Operations Monitor. This check box also controls whether the Archive or Delete action is available in the Asynchronous Details component of the Services Operations Monitor. If archiving is not enabled, the system purges the queue entries that have been processed. Note: This setting controls whether archiving is available for asynchronous transactions only and pertains to transactions in a specific queue.
Unordered	Select to enable field partitioning and to process service operations unordered. By default, the check box is deselected and inbound service operations that are assigned to a queue are processed one at a time sequentially in the order that they are sent. Select to force the channel to handle all of its service operations in parallel (unordered), which does not guarantee a particular processing sequence. This disables the channel's partitioning fields. Deselect this check box if you want all of the queues's service operations processed sequentially or if you want to use the partitioning fields.
Description	Enter a description for the queue.
Queue Status	Values are: <i>Run:</i> (default) Service operations that are assigned to this queue are received and processed normally. <i>Pause:</i> Service operations are received but not processed until the status is reset to <i>Run</i>. Note: You can also pause and restart queues in the Service Operations Monitor.

Field or Control	Description
Object Owner ID	From the drop-down list box, select the object owner. The owner ID helps to determine the application team that last made a change to the definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
Comments	Use this area to enter comments about the definition.
Operations Assigned to Queue	This read-only section lists all service operations that are assigned to the queue.
Include	Select the Include check box next to a field name to include the field in queue partitioning.
Add Field	Click to view and select partitioning fields.

Related Links

[Applying Queue Partitioning](#)

“Understanding Pausing Nodes” (Integration Broker Service Operations Monitor)

Applying Queue Partitioning

This section provides an overview of queue partitioning and discusses how to select partitioning fields.

Understanding Queue Partitioning

This section discusses queue partitioning

Queue Partitioning

By default, all inbound service operations that are assigned to a given service operation queue are processed one at a time, in the order they are sent. Consequently, the sending node can engage in a series of transactions that modify a specific record, and the changes are applied by the receiving node in the correct order. This can be inefficient if the sequence does not matter or if the sequence is relevant only within groups of service operations with the same key values. One solution to this inefficiency is partitioning.

Note: Partitioning applies only to asynchronous messaging.

To maximize messaging efficiency and throughput, you want the system to simultaneously process as many service operations as possible. Because queues enforce service operation sequence, ideally you have a separate service operation queue for each group of service operations that must be processed in order. You can achieve this goal by designating specific fields that are common to the service operations that are

assigned to a queue. These fields partition, or divide, the queues into subqueues. PeopleSoft Integration Broker creates these subqueues at runtime.

Each subqueue processes only the service operations for which the designated common fields have an identical combination of values. The service operations within each subqueue are processed in the order that they are sent, so they remain in sequence. Each subqueue works in parallel with the other subqueues—all subqueues simultaneously process their own associated service operations.

You implement partitioning by designating the partitioning fields in the queue definition; no other steps are required.

Note: The more partitioning fields that you designate, the more subqueues are generated. If you designate a combination of fields that are unique for each service operation, all service operations are processed simultaneously, in their own subqueues, without regard to sending order. This is the equivalent of selecting the **Unordered** check box in the queues definition.

Note: For inbound transactions, re-partitioning (re-running of the queue partition logic) could take place as a result of a successful inbound transform if no partition key was passed as part of the request.

Queue Partitioning Fields

When working with queue partitioning fields, note the following points:

- The maximum length of a queue partitioning value should not exceed 60 characters. The system truncates any value longer than 60 characters when you use the PeopleCode SubQueueName property.
- Fields of types image and long character aren't available for partitioning.
- When you are partitioning nonrowset-based or inbound messages, tags cannot be mixed case.

Selecting Partitioning Fields

You can partition queues using any combination of:

- Database record fields.
- Message header fields.
- Message XML fields.

Database Record Fields

Database record fields are the data fields in a PeopleSoft rowset-compatible message. Typically, the more service operations that you assign to the queue, the fewer fields they have in common.

The database record fields that are common to all service operations in the queues appear in the queues's Common Field list. If only one service operation is assigned to the queues, all of its fields appear on the partitioning list.

To designate a field as a partitioning key, select the check box next to its name.

Message Header Fields

The message header fields are system-maintained fields that are common to all service operations, regardless of format. If a queue includes any nonrowset-compatible service operations, the message header fields are the only ones that PeopleSoft Integration Broker recognizes as common to every service operation. You can view them as part of the message XML in Integration Broker Monitor. You can also access some of them using equivalent PeopleCode Message class properties, as indicated later in this topic. The message header fields are:

- **OPERATIONNAME:** This field contains the name of the operation in the PeopleSoft Pure Internet Architecture.
- **PUBLISHER:** This field contains the user ID that is in effect when the service operation is published, that is, the ID of the user who is signed in to the publishing database.
- **PUBPROC:** This field refers to the PeopleSoft process that publishes the service operation.

It is generated when the service operation is published, and it can be the name of a component, an Application Engine program, or an iScript program.

These header fields are always available in the queue's partitioning field list. To designate a field as a partitioning key, select the **Include** check box next to its name.

Message XML Fields

The message XML fields comprise all the fields that exist anywhere in a message, including PeopleSoft common application message attributes (PSCAMA) record fields. Such fields may not be visible in the queues's partitioning field list, but they are valid for partitioning. Message XML fields can have aliases, allowing for support of mixed-case names.

To designate a message XML field as a partitioning key:

1. Access the Queue Definitions page (**PeopleTools > Integration Broker > Integration Setup > Queue Definitions**).
2. Click the **Add Field** button.
3. Enter the tag name of the XML field, or click the **Lookup** button to search for one.

The value does not have to be in the database.

All names are uppercase by default. You can then add an alias, which can be mixed-case for partitioning.

At runtime, the integration engine searches each message for the first instance of that field tag and uses the value that is associated with it for partitioning. Therefore, if you have common fields in the PSCAMA record that are specific to a batch publish set, you can use those fields.

Renaming and Deleting Queues

You can rename and delete queue definitions using the Queue page (IB_HOME_PAGE3) in the Service Administration component (IB_HOME_PAGE).

The Queues page contains two sections: a Delete section that enables you to delete a queue definition and a Rename section that enables you to rename a queue definition.

To access the page, select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and select the Queues tab.

When you first access the page, both sections are collapsed. Click the section-header arrow buttons to expand and collapse each section.

This example illustrates the Service Administration – Queues page.

Service System Status: Development

Delete

Queue Name:

Search

Select	Queue Name	Results
☐		

Delete

Rename

Queue Name:

New Name:

Rename

Results:

The top of the page displays a **Service System Status** field with the current setting, as defined on the Service Configuration page. This setting affects the ability to rename and delete queues.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

Renaming Queue Definitions

To rename a queue definition:

1. Access the Services Administration - Queues page (**PeopleTools > Integration Broker > Integration Broker Admin** and click the **Queues** tab).
2. Click the arrow next to the Rename section header to expand the section.
3. In the **Queue Name** field, enter the queue definition to rename, or click the **Lookup** button to search for and select the queue to rename.
4. In the **New Name** field, enter the new name for the queue definition.

5. Click the **Rename** button.

Deleting Queue Definitions

To delete a message definition:

1. Access the Services Administration - Queues page (**PeopleTools** > **Integration Broker** > **Integration Broker Admin** and click the **Queues** tab).
2. Click the arrow next to the Delete section header to expand the section.
3. In the **Queue Name** field, enter the name of the queue definition to delete, and click the **Search** button.

Search results appear in the results grid.

4. In the results grid, select the check box next to the queue or queues to delete.
5. Click the **Delete** button.

Deleting Queues During Upgrade

To delete a queue definition in an application upgrade project, first ensure that no live instances of messages are assigned to that queue. Archive or delete any such messages in both the source and the target database. Otherwise, an error message appears during the copy process indicating that the message is in use.

Using the Queue Prioritization Page

Use the Queue Prioritization page to prioritize queues to ensure that higher, time-sensitive transactions are processed first.

To access the Queue Prioritization page, select **PeopleTools** > **Integration Broker** > **Configuration** > **Queue Prioritization**.

This example illustrates the fields and controls on the Queue Prioritization page. You can find definitions for the fields and controls later on this page.

Queue Prioritization

Use the following grid to assign a number-based priority to Queues, using numbers 1-10, where 1 is the highest priority. Duplicate priority numbers are allowed.

Queue Priority Assignment

<

<

1-4 of 4

>

>

	Queue Name	Description	Queue Priority		
1	QE_PO_QUEUE	QE_PO_QUEUE	2	+	-
2	QE_KAC_CHNL	KAC_CHNL	3	+	-
3	EMAIL_CHNL	Email Channel	1	+	-
4	PROCESS_SCHEDULER	Process Scheduler Messages	1	+	-

<i>Field or Control</i>	<i>Description</i>
Queue Name	Enter the queue definition or click the lookup button to search for and select the queue.
Description	Displays the description for the queue.
Queue Priority	Enter a numbers between 1 and 10 to assign a number-based priority to the queue, where 1 is the highest priority. Duplicate priority numbers are allowed.

Enabling Runtime Message Schema Validation

Understanding Message Schema Validation

PeopleSoft Integration Broker enables you to validate, at runtime, the messages defined in service operations against message schemas.

Message Schema Validation

Validating messages against message schemas can ensure that during integration development no changes or deletions were inadvertently made to a message. You can use schema validation on outbound and inbound messages.

During runtime schema validation, PeopleSoft Integration Broker checks messages to ensure that the XML structure is valid according to the specified message schema. If Integration Broker encounters a service operation with a message structure that does not adhere to the specified message schema, message delivery fails and Integration Broker generates an error message.

Schema validation is based on the message schema for the `message.version` defined on the default service operation.

You can view any schema validation error details on the source application server, using the Asynchronous Details page or Synchronous Details page in the Service Operations Monitor.

When schema validation is enabled the structure of a message cannot be changed.

Message Schema Validation and Transformations

In instances where an inbound transaction has a transformation applied, the input `message.version` is used for schema validation. If an input `message.version` is not defined, then validation takes place using the request `message.version` of the default service operation.

For the case where a point-to-point routing and an any-to-local routing are both defined, the system uses the point-to-point routing to check for a transform.

Message Schema Validation and Part Messages

PeopleSoft Integration Broker does not perform parser validation on part messages in container messages.

URLs defined in container messages do not contain absolute paths. As a result, the parser cannot import these schemas to perform validation.

PeopleSoft internal validation is performed on the data and structure of part messages within contain messages. However, these validation results may be different than results achieved using parser validation.

Prerequisites for Validating Message Schemas

Before you can enable schema validation, you must build or import a message schema for the message and message version.

If no message schema is present for service operations that contain regular nonrowset-based messages or container messages, it is not possible to enable validation.

For service operations that contain rowset-based messages, the system will attempt to generate a schema if one is missing. If the system is able to successfully generate a message schema for a rowset-based message, validation is enabled.

See [Understanding the Message Schema Builder](#).

Selecting Service Operations

This section discusses how to select service operations that contain messages to validate against message schemas at runtime.


Selecting a Service Operation

The first step to enabling runtime message schema validation is to select the service operations that contain the messages to validate.

When you access the Service Schema Builder component (IB_SERVICEVAL), the Service Schema Validation page (IB_SERVICEVAL) appears and displays a search engine that you use to search for service operations.

To access the Service Schema Validation page select **PeopleTools > Integration Broker > Service Utilities > Validate Service Schemas**.

This example illustrates the Service Schema Validation page.

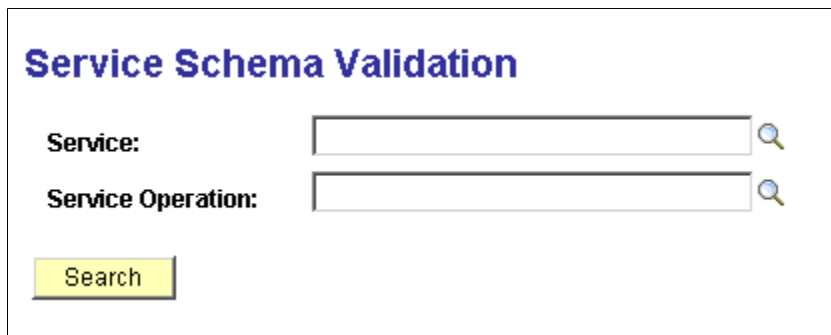

The screenshot shows a web page titled "Service Schema Validation" in blue text. Below the title, there are two search fields. The first field is labeled "Service:" and the second is labeled "Service Operation:". Both fields have a magnifying glass icon to their right. Below these fields is a yellow button with the text "Search".

To search for a service operation, enter the service or service operation with which to work and click the **Search** button. A list of results displays in the Service Operations grid. If you do not enter any search criteria and click the **Search** button, the system returns all services and service operations in the database.

When you search for service schema validation data, the system returns the results in the Service Operations grid shown on the Service Schema Validation.

This example illustrates the fields and controls on the Service Schema Validation page. You can find definitions for the fields and controls later on this page.

Service Schema Validation

Service:
Service Operation:

Search

Service Operations					Customize	Find	View 100	First	1-10 of 250	Last
Service	Service Operation	Version	Validation	Results						
ASYNCDMDNRESPONSE	ASYNCDMDNRESPONSE	VERSION_1	☐							Schema
PTWORKLIST	CREATE_WORKLIST_ITEM	V1	☐							Schema
DELETE_ROLE	DELETE_ROLE	v1	☐							Schema
DELETE_USER_PROFILE	DELETE_USER_PROFILE	VERSION_1	☐							Schema
EMAIL_MSG	EMAIL_MSG	VERSION_1	☐							Schema
GENCOMPONENTURL	GENCOMPONENTURL_SO	v1	☐							Schema
SAWSESSIONSERVICE	GETHTMLFORPAGEWITHONEREPORT	V1	☐							Schema
IB_UTILITY	GETROUTINGS	V1	☐							Schema
IB_UTILITY	GETSCHEMA	V1	☐							Schema
SAWSESSIONSERVICE	GETSUBITEMS	V1	☐							Schema

Field or Control	Description
Service	Indicates the name of the service.
Service Operation	Indicates the name of the service operation.
Version	Indicates the version of the service operation.
Validation	Indicates if runtime schema validation is enabled. When the check box is selected, schema validation is enabled.

Field or Control	Description
Results	Displays validation results. The valid values are: <i>Error generating schema. Unable to turn on validation.</i> This message appears if one or more of the messages in the service operation is nonrowset-based and schemas do not exist for the nonrowset-based messages. <i>Service operation saved.</i> This message appears when you have successfully enabled runtime schema validation and saved the changes. <i>Error saving service operation.</i>
Schema	Click the link to access message schemas for all messages defined on the service operation. See Viewing Defined Message Schemas.

Viewing Defined Message Schemas

This section discusses how to view defined XML schemas for messages.

Viewing XML Schemas Defined for Messages

To view defined message schemas for all messages contained in a service operation, in the Service Operations grid, locate a service operation with which to work and click the **Schema** link. The systems displays the service operation in the Schema Builder page (IB_SCHEMABUILD).

This example illustrates the Message Schema Builder page. The example shows the page displaying two messages for the *MCFEM_REQ_MKFOLDER* service operation.

Message Schema Builder

Message Criteria

Service Operation: MCFEM_REQ_MKFOLDER
Service: MCFEM_REQ_MKFOLDER **Service Operation Version:** VERSION_1

Message Schemas

Customize | Find | View All | |
First 1-2 of 2 Last

	Message	Message Version	Rowset-based	Exists	Updated on	Build Results
☐	MCFEM_REQ_MKFOLDER	VERSION_1	Yes	Yes	07/06/2009 11:06:11AM	
☐	MCFEM_RES_MKFOLDER	VERSION_1	Yes	Yes	07/06/2009 11:06:11AM	


☒ [Select All](#) ☐ [Clear All](#)
 [Build Selected Schemas](#) [Delete Selected Schemas](#)

The **Exists** field displays a value of *Yes* for both messages and indicates schemas have been built for both messages.

If schemas are not built for a message or messages, you can build them directly from this page by selecting the check boxes next to each message name and clicking the **Build Selected Schemas** button.

To view the XML schema for a message, click the message name link.

This example illustrates the message schema for the *MCFEM_REQ_MKFOLDER* message.

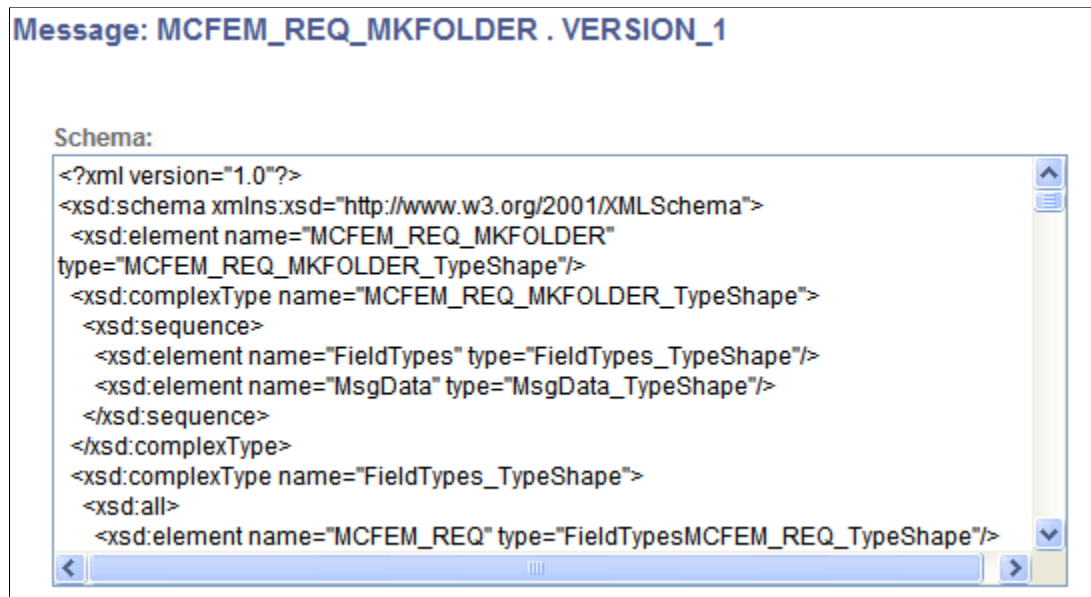

To return to the Schema Builder page, click the **Return** button.

Using the Schema Builder page is documented in detail elsewhere in the product documentation.

Related Links

[Understanding the Message Schema Builder](#)

Enabling Runtime Message Schema Validation

This section discusses how to enable runtime schema validation for all messages defined in a service operation:

You can enable runtime message schema validation from the Service Schema Validation page or from the Service Operations page.

Using the Service Schema Validation Page to Enable Runtime Message Schema Validation

To enable runtime schema validation using the Service Schema Validation page:

1. Access the Service Schema Validation page (**PeopleTools > Integration Broker > Service Utilities > Validate Service Schemas**).

2. Select a service operation that contains messages against which you want to validate message schemas.

See [Selecting Service Operations](#).

3. Select the **Validation** check box.
4. Click the **Save** button.

Using the Service Operations page to Enable Runtime Message Schema Validation

To enable runtime schema validation using the Service Operations page:

1. Access the Service Operations page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**).
2. In the Default Service Operation Version section of the page, select the **Runtime Schema Validation** check box.
3. Click the **Save** button.

Creating Component Interface-Based Services

Understanding Creating Component Interface-Based Services

PeopleSoft Integration Broker enables you to take an existing component interface and create a service that can be used to invoke the component interface. Further, it creates service operations, including request messages and response messages (if appropriate). The system creates an inbound any-to-local routing for the service operation version, as well as handlers for each method you choose to include in the service.

All service operations you generate from component interfaces are synchronous service operations.

Naming Conventions Integration Metadata Created

This section highlight the naming conventions that the PeopleSoft system uses when it creates services and services-related data based on component interfaces.

When it creates a web service from a component interface, the PeopleSoft system adds a *CI_* prefix to the component interface name. So if the component interface name is *MYCI*, the service name the system creates is *CI_MYCI*

The following table highlights naming conventions the PeopleSoft systems applies to other services data based on the method with which you are working:

Component Interface Method	Service Operation Name	Message Name	Component Interface Handler	Request Message Shape	Response Message Shape
Create	<service_name>_C	Mxxxxxx	ONREQUESTHDL	CI Buffer	Key
Find	<service_name>_F	Mxxxxxx	ONREQUESTHDL	Get Keys	CI Buffer
Get	<service_name>_G	Mxxxxxx	ONREQUESTHDL	Find Keys	Key Collection
Update	<service_name>_UP	Mxxxxxx	ONREQUESTHDL	CI Buffer	Notification
Updatedata	<service_name>_UD	Mxxxxxx	ONREQUESTHDL	CI Buffer	Notification
User-defined	<service_name>_<method_name>	Mxxxxxx	ONREQUESTHDL	CI Buffer	Method Return Type

The naming convention used for message names, *Mxxxxxx*, is the letter M followed by a random six-digit number, as denoted by the x's. An example of a message name is *M548902*.

Note: The maximum number of characters for a service operation name is 30. If using a user-defined method name yields a greater result, the name is used is <service_name>_Mxxx, where xxx is a three-digit random number. An example of such a name is *CI_USERCI_M101023*.

User-Defined Method Restrictions

This section discusses restrictions related to using user-defined methods when exposing component interfaces as services.

User-Defined Method Actions

User-defined methods which are executed with the Create action should not be exposed as web services.

Specifying Method Parameters and Parameter Names

All user defined methods that will be accessed via the service interface must have a doc string.

The doc string contains:

1. The keyword *GET* .
2. An ordered list of parameter names corresponding to the method's parameters.

The following example shows the format of the doc string:

```
Function simpleFunction(&sParm As string, &dParm As date,
                        &nParm As number, &bParm As boolean)
    Returns string
    Doc "GET, StringParm, DateParm, NumParm , BoolParm"

    Local string &aString = &sParm;
    &aString = &aString | " -- " | &dParm;
    &aString = &aString | " -- " | &nParm;
    &aString = &aString | " -- " | &bParm;
    Return &aString;

End-Function;
```

The contents of the doc string are used when the function is invoked. For example, if GET is specified, then the GET keys are set, and GET is called on the component interface before the used-defined method is invoked.

The list of parameters are used at runtime to match the data in the input message with the method's parameters. This is an ordered list; if the parameter list in the doc string and the method parameters don't match, then the method may not work correctly. The names in the doc parameter list will be the names visible in any WSDL created for the service.

Method parameters and return values must be of a primitive type, such as a string, date or number. Object parameters or return values are not supported.

Impact of Changing Component Interfaces

If a user modifies or deletes a component interface in PeopleSoft Application Designer, when the user saves the changes, PeopleSoft Integration Broker checks if a service exists for the component interface. If a service exists, and the component structure/properties have changed in the component interface, a warning message appears stating that a service exists for the component interface.

If the component interface structure changes, a status of *Does not match* appears in the CI-Based Services Review Status grid, and the operation appears as active in the Service Operations component.

Prerequisites for Creating Component Interface-Based Services

Prior to creating any component interface-based web services and service operations, you must define the schema namespace, service namespace, and target location in the Service Configuration page

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

Selecting Component Interfaces to Expose as Services

This section discusses how to select component interfaces to expose as web services.

The first step to creating component interface-based services is to choose the component interface on which to base a service. To do so, use the CI-Based Services component (IB_CISERVICES) and the Select Component Interface page (IB_CISERVICES).

This example illustrates the Select Component Interfaces page.

CI-Based Services
Select Component Interfaces

Component Interface Name:

Component Name:

Owner ID:

Select	CI Name	Description	Component Name	Object Owner ID
☐	CURRENCY_CD_CI		CURRENCY_CD_COMP	

When you search for component interfaces to select, the system returns results only for those component interfaces to which you have permissions.

To select a component interface:

1. Access the Select Component Interfaces page (**PeopleTools** > **Integration Broker** > **Web Services** > **Provide CI-Based Services**).

2. Search for a component interface:

Note: You can search only for those component interfaces to which you have permissions.

- Click the **Search** button to search from all component interfaces in the database, or
- Select one or more of the following criteria to narrow your search and then click the **Search** button.

<i>Field or Control</i>	<i>Description</i>
Component Interface Name	Enter part or all of the name of the component interface to use, or click the Lookup button to search for one.
Component Name	Enter part or all of the component name to which a component interface belongs.
Owner ID	Owner ID drop-down list box, select the person or group that owns the component interface.

The Select CIs grid displays are component interfaces that match your search.

3. Select the **Select** check box next to one or more component interfaces.
4. Click the **Review CI Status** button.

The Review CI Status page appears where you can review details about the select component interface and select the methods to include as operations in the service.

Selecting Component Interface Methods to Include as Service Operations

This section discusses using the Review Status page (IB_CISERVICES2) to select methods to include web services as service operations.

This example illustrates the fields and controls on the Review Status page. You can find definitions for the fields and controls later on this page.

CI-Based Services

Review Status

Status

Find First 1 of 1 Last

CI Name: CURRENCY_CD_CI

Description:

Service: CI_CURRENCY_CD_CI

Status: Service does not exist and will be created.

Choose Method

Select	Action	Method	Service Operation	Status
☐	Create Operation.	Get		Does not exist.
☐	Create Operation.	Create		Does not exist.
☐	Create Operation.	Find		Does not exist.
☐	Create Operation.	Update		Does not exist.
☐	Create Operation.	Updatedata		Does not exist.

☒ Select All
 ☐ Deselect All

Display Selected Actions

[Return to Select CIs](#)

The Review Status page shows the following information about the component interface you select to expose as a service:

Field or Control	Description
CI Name	Name of the component interface.
Service	Name of the service created based on the component interface. Note that the service name is the component interface name with <i>CI_</i> added as a prefix.
Description	A description of the component interface. This information is taken from the component interface record and displays if it exists.
Status (Service)	Displays the status of the service. The valid values are: <i>Service does not exist and will be created.</i> Indicates that a services does not exist for the service and the system will create one. <i>Service Exists.</i> Indicates that a service has already been created for the component interface.

Field or Control	Description
Select	Select the check box to include a method as an operation for the service. If the check box is disabled, the method has already been included in the operation and the Service Operation field displays the name of the operation created. You can select one or more methods at a time.
Action	Displays the action available to perform on the method. The valid values are: • <i>Create Operation</i>. This action displays if no service operation exists for the method. • <i>Create New Version</i>. This action displays if the current request or response shape do not match the shapes previously generated. A new service operation version is generated. • <i>None</i>. If an operation exists, it compares the component interface and the service operation. If they are in sync, no action is required.
Method	Name of the component interface method. The system displays user-defined and standard methods. All user-defined methods appear in lowercase. You can create service operations based on the following standard component interface methods: • <i>Create</i>. • <i>Get</i>. • <i>Find</i>. • <i>Update</i>. • <i>Updatedata</i>. • User-defined methods. Update and Updatedata appear if both Get and Save have been enabled in the component interface. Note: All user-defined methods are lowercase. If you have a user-defined method called <i>update</i>, it is a different method than the Update method used here.
Service Operation	Name of the service operation, if one exists for a method. The name the system give the service operation depends on the service name as well as the component interface method.

Field or Control	Description
Status (Service Operation)	The status corresponds to the value in the Action field. The valid values are: <i>Does not exist.</i> No service operation exists for the method. <i>Does not match.</i> The service operation does not match the existing component interface. <i>OK.</i> The service operation matches the existing component interface. <i>Operation created.</i> The system created the operation.
Display Selected Actions	Click the button to display a summary of the actions requested and then generate services and service operations.

Generating Component Interface-Based Services

This section discusses how to:

- Generate services and service operations from component interface methods.
- Inherit component interface security permission lists.
- Add message names and descriptions to generated service operations.

Generating Services and Service Operations from Component Interface Methods

Use the Confirm Actions page (IB_CISERVICES_SEC) to confirm the component interface and select actions to use for generating service operations.

This example illustrates the fields and controls on the Confirm Actions page. You can find definitions for the fields and controls later on this page.

Confirm Actions																															
Actions CI Name: CURRENCY_CD_CI Description: Service: CI_CURRENCY_CD_CI Service Alias: Service Status: Service does not exist and will be created. ☒ Inherit All CI Permissions																															
Choose Operation <table border="1"> <thead> <tr> <th>Select</th> <th>Action</th> <th>Method</th> <th>Service Operation</th> <th>Alias</th> <th>Inherit CI Permissions</th> <th>Version</th> <th>Message Names and Descriptions</th> </tr> </thead> <tbody> <tr> <td>☒</td> <td>Create Operation.</td> <td>Get</td> <td>CI_CURRENCY_CD_CI_G.V1</td> <td></td> <td>☒</td> <td></td> <td>Names and Descriptions</td> </tr> <tr> <td>☒</td> <td>Create Operation.</td> <td>Create</td> <td>CI_CURRENCY_CD_CI_C.V1</td> <td></td> <td>☒</td> <td></td> <td>Names and Descriptions</td> </tr> </tbody> </table>								Select	Action	Method	Service Operation	Alias	Inherit CI Permissions	Version	Message Names and Descriptions	☒	Create Operation.	Get	CI_CURRENCY_CD_CI_G.V1		☒		Names and Descriptions	☒	Create Operation.	Create	CI_CURRENCY_CD_CI_C.V1		☒		Names and Descriptions
Select	Action	Method	Service Operation	Alias	Inherit CI Permissions	Version	Message Names and Descriptions																								
☒	Create Operation.	Get	CI_CURRENCY_CD_CI_G.V1		☒		Names and Descriptions																								
☒	Create Operation.	Create	CI_CURRENCY_CD_CI_C.V1		☒		Names and Descriptions																								
Perform Selected Actions Return to Select CIs																															

You can work with the following page elements:

Field or Control	Description
Service Alias	(Optional.) Enter an alias name for the service. The name you enter can be lower or mixed-case. If specified, this is the service name that appears in any WSDL documents you generate.
Inherit All CI Permissions	Select the check box so that all service operations you create inherit the security permissions as defined for the component interface after which they are based. By default the check box is selected. To inherit security permissions for specific service operations only, use the Inherit CI Permission check box in the Choose Operation grid. See Inheriting Component Interface Security Permission Lists.
Select	(Optional.) Deselect the check box to omit creating a service operation for a method.
Alias (Service Operation)	(Optional.) Enter an alias name for the service operation. The name you enter can be lower or mixed-case. If specified, this is the service operation name that appears in any WSDL documents you generate.
Inherit CI Permissions	Select the check box for a service operation to inherit the security permissions as defined for the component interface after which it is based. By default the check box is selected for all service operations based off of a component interface. Deselect the check box for each service operation you do not want to inherit the permissions defined for the component interface after which it is based. See Inheriting Component Interface Security Permission Lists.
Version	(Optional.) Service operations created default version <i>V1</i>. You may enter a different value to use as the version when the service operation is created. This field is a text field, so you may enter numeric or text values.
Message Names and Descriptions	(Optional.) Click the link to specify names and descriptions for messages in the service operation. The message names and descriptions will appear in the generated XML message schema. If you do not enter message names or descriptions, PeopleSoft Integration Broker assigns system-generated names to the messages. The following example shows a sample system-generated message name: <i>M702221.V1</i>

<i>Field or Control</i>	<i>Description</i>
Perform Selected Action	Click the button to generate services and service operations for the component interface and selected methods. After the service and service operations are created, the Review Status page displays and you can review the actions performed as well as access the service definition created.
Return to Select CIs	Click the link to return to the previous page, the Review Status page.

Inheriting Component Interface Security Permission Lists

You can specify that all or select component interface-based service operations inherit the security permission list(s) of the component interface from which they are derived. This feature allows you to bypass the process of manually assigning permission lists to the service operations after you generate them.

The Confirm Actions page (IB_CISERVICES_SEC) shown in the previous section contains an **Inherit All CI Permissions** check box located on the upper half of the page. The Choose Operation grid of the page features an **Inherit CI Permissions** check box for each service operation to be generated.

Important! Permission lists granted to a component interface after the service operation is created are not propagated to the service operations and you must manually add them.

<i>Field or Control</i>	<i>Description</i>
Inherit All CI Permissions	Select the check box for all service operations to inherit the permission lists of the component interface from which they are based. By default the check box is selected. Deselect the check box to choose select service operations to inherit the permission list(s) of the base component interface or to manually define permission lists for the service operations in the PeopleTools Security component.
Inherit CI Permissions	Select the check box for each service operation that is to inherit the permission list(s) of the base component interface. Deselect the check box for each service operation this is not to inherit the permission list(s) of the base component.

The system generates service operations for the Update and UpdateData methods based the existence of the Get method. Therefore, the same permissions granted to a component interface's Get method are inherited by service operations based on the Update and UpdateData methods

Related Links


[Generating Services and Service Operations from Component Interface Methods](#)

[Setting Permissions to Service Operations](#)

Adding Message Names and Descriptions to Generated Service Operations

The Confirm Actions page features a **Message Names and Descriptions** link for each service operation. Click the link to open the Message Names and Descriptions page (IBCISERVICES2_SEC). On the page you can enter names for each message in the service operations. You can also enter a description for each message name. The message names and description will appear in the generated XML message schema for the service operation.

This example illustrates the Message Names and Descriptions page.

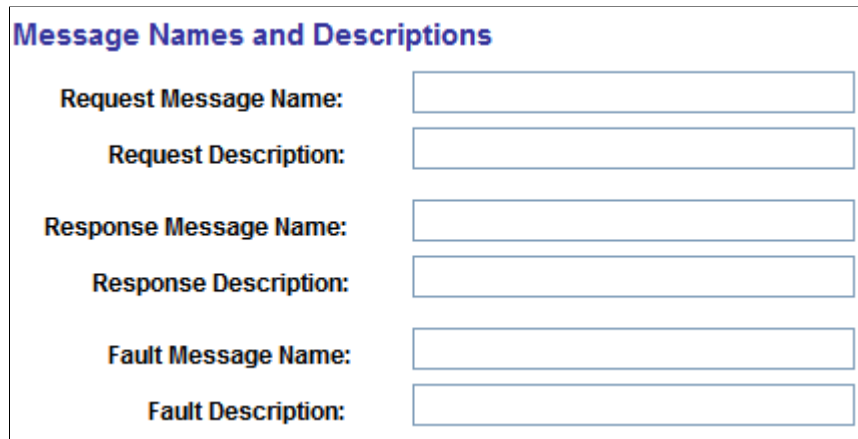

The screenshot shows a web form titled "Message Names and Descriptions" in blue text. The form contains six input fields arranged in three pairs. Each pair consists of a label followed by a text box. The labels are "Request Message Name:", "Request Description:", "Response Message Name:", "Response Description:", "Fault Message Name:", and "Fault Description:". The text boxes are empty and have a light blue border.

In the message name fields, enter a message name. You do not need to append the message name with a version number. The system automatically creates a version of the message as version one, and appends the message name with *.V1*.

When you have completed entering message names and descriptions, click the **OK** button to return to the Confirm Actions page.

Viewing Component Interface-Based Service Definitions

After you generate services and service operations, the Review Status page (IB_SERVICES2) appears.

Use the page to review the actions performed.

This example illustrates the Review Status page.

CI-Based Services

Review Status

Status

Find First 1 of 1 Last

CI Name: CURRENCY_CD_CI

Description:

Service: CI_CURRENCY_CD_CI

Status: Service saved.

[View Service Definition](#)

Choose Method

Select	Action	Method	Service Operation	Status
☐	Create Operation.	Get	CI_CURRENCY_CD_CI_G.V1	Operation created.
☐	Create Operation.	Create	CI_CURRENCY_CD_CI_C.V1	Operation created.
☐	Create Operation.	Find		Does not exist.
☐	Create Operation.	Update		Does not exist.
☐	Create Operation.	Updatedata		Does not exist.

☒ [Select All](#)
☐ [Deselect All](#)

Display Selected Actions

[Return to Select CIs](#)

For example, the previous graphic shows the names of the two service operations created as well as the service operation status of *Operation created*

From this page you can continue to create additional service operations using the remaining available methods for the component interface.

Or, you can click the **Return to Select CI** link to return to the Select Component Interface page to select new component interfaces for which to generate services and service operations.

You can also click the **View Service Definition** link to view the service definition for the service created.

When you click the **View Service Definition** link the service you created, *CI_CURRENCY_CD_CI* appears in the Services page.

This example illustrates the Services page.

Services

Service:

CI_CURRENCY_CD_CI

*Description:

CI_CURRENCY_CD_CI

Comments:

Service Alias:

Object Owner ID:

*Namespace:

http://xmlns.oracle.com/Enterprise/Tools/services

[Link Existing Operations](#)
[View WSDL](#)
[Provide Web Service](#)

Service Operations

Service Operation:

Operation Type:

Add

Existing Operations

[Customize](#) | [Find](#) | [View All](#) |

First 1-2 of 2 Last

Operation

Message Links

Operation.Default Version	Description	Active	Operation Type	
CI_CURRENCY_CD_CI_C.V1	CI_CURRENCY_CD_CI_C	☒	Synch	
CI_CURRENCY_CD_CI_G.V1	CI_CURRENCY_CD_CI_G	☒	Synch	

From this page you can perform actions as you would on any other service, including:

- Click the **Provide Web Service** link to generate WSDL for the service.
- Use the **Service Operations** check box to add additional service operations to the service.
- Click either of the operations that display in the **Existing Operations** check box to generate routing definitions, view the response, request or fault messages, view handler details, and more.
- And so on.

Related Links

[Understanding Managing Services](#)
[Understanding Managing REST Services](#)
[Understanding Managing Service Operations](#)
[Understanding REST Service Operations](#)

Creating Component Interface-Based REST Services

Understanding Creating Component Interface-Based REST Services

PeopleSoft Integration Broker enables you to take an existing component interface and create a REST-based service that can be used to invoke the component interface. Further, it creates service operations, including request messages and response messages (if appropriate). The system creates an inbound any-to-local routing for the service operation version, as well as handlers for each method you choose to include in the service.

All service operations you generate from component interfaces are synchronous service operations.

This feature allows you to:

- Create services for selected component interfaces.
- Add selected methods to existing REST services previously created using this component.
- Compare selected component interfaces with the REST services previously created using this component.

Naming Conventions Created by Integration Metadata

This section highlights the naming conventions that the PeopleSoft system uses when it creates REST services and services-related data based on component interfaces.

When it creates a web service from a component interface, the PeopleSoft system adds a CIRT_ prefix to the component interface name. So if the component interface name is MYCI, the service name the system creates is CIRT_MYCI.

The following table highlights naming conventions the PeopleSoft systems applies to other service data based on the method with which you are working:

<i>Component Interface Method</i>	<i>Service Operation Name</i>	<i>Message Name</i>	<i>Component Interface Handler</i>	<i>Request Message Shape</i>	<i>Response Message Shape</i>
Create	CIRT_<CI Name>_C_POST	Mxxxxxxx	ONREQUESTHDLR	CI Buffer structure	Object Key
Get	CIRT_<CI Name>_G_GET	Mxxxxxxx	ONREQUESTHDLR	Get Keys	CI Buffer

Component Interface Method	Service Operation Name	Message Name	Component Interface Handler	Request Message Shape	Response Message Shape
Find	CIRT_<CI Name>_F_GET	Mxxxxxx	ONREQUESTHDLR	Find Keys	Find Key Collection
Update	CIRT_<CI Name>_U_PUT	Mxxxxxx	ONREQUESTHDLR	CI Buffer structure	Notification, error details
Update Data	CIRT_<CI Name>_UD_PUT	Mxxxxxx	ONREQUESTHDLR	CI Buffer structure	Notification, error details

Note: The maximum number of characters for a service operation name is 30.

Impact of Changing Component Interfaces

If a user modifies or deletes a component interface in PeopleSoft Application Designer, when the user saves the changes, PeopleSoft Integration Broker checks if a service exists for the component interface. If a service exists, and the component structure or properties have changed in the component interface, a warning message appears stating that a service exists for the component interface.

If the component interface structure changes, a status of *Does not match* appears in the CI-Based REST Services Review Status grid, and the operation appears as active in the Service Operations component.

Prerequisites for Creating Component Interface-Based REST Services

Prior to creating component interface-based REST services and service operations, you must define the schema namespace, service namespace, and target location in the Service Configuration page.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

Selecting Component Interfaces to Expose as REST Services

This section discusses how to select component interfaces to expose as REST services.

The first step to creating component interface-based REST services is to choose the component interface on which to base a service. To do so, use the CI-Based REST Services component (IB_CISERVICES_REST) and the Select Component Interface page (IB_CISERVICES).

This example illustrates the Select Component Interfaces page.

CI-Based REST Services

Select Component Interfaces

Component Interface Name

QE_B

Component Name

Owner ID

Search

Select CIs

Personalize | Find | View All |

First 1-2 of 2 Last

Select	CI Name	Description	Component Name	Owner ID
☐	QE_BD_CALENDAR		DETAIL_CALENDAR	PeopleTools Demo
☐	QE_BUS_EXP		QE_BUSINESS_EXP	PeopleTools Demo

Review CI Status

Notify

When you search for component interfaces to select, the system returns results only for those component interfaces to which you have permissions.

To select a component interface:

1. Access the Select Component Interfaces page (**PeopleTools > Integration Broker > Web Services > Provide CI-Based REST Services**).
2. Search for a component interface:

Note: You can search only for those component interfaces to which you have permissions.

- Click the **Search** button to search from all component interfaces in the database, or
- Select one or more of the following criteria to narrow your search and then click the **Search** button.

Field or Control	Description
Component Interface Name	Enter part or all of the name of the component interface to use, or click the Lookup button to search for one.
Component Name	Enter part or all of the component name to which a component interface belongs.
Owner ID	Owner ID drop-down list box, select the person or group that owns the component interface.

The Select CIs grid displays are component interfaces that match your search.

3. Select the check box next to one or more component interfaces.

- Click the **Review CI Status** button.

The Review Status page appears where you can review details about the selected component interface and then select the methods to include as operations in the REST service.

Related Links

[Selecting Component Interface Methods to Include as REST Service Operations](#)

Selecting Component Interface Methods to Include as REST Service Operations

This section discusses using the Review Status page (IB_CISERVICES2) to select methods to include REST services as service operations.

This example illustrates the fields and controls on the Review Status page. You can find definitions for the fields and controls later on this page.

CI-Based REST Services
Review Status

Status Find First 1 of 1 Last

CI Name QE_BUS_EXP Description
Service CIRT_QE_BUS_EXP Status Service exists.

[View Service Definition](#)

Select	Action	Method	Service Operation	Status
☐	Create Operation.	Get		Does not exist.
☐	Create Operation.	Find		Does not exist.
☐	Create Operation.	Update		Does not exist.
☐	Create Operation.	Updatedata		Does not exist.

☒ Select All ☐ Deselect All

[Display Selected Actions](#) [Return to Select CIs](#)

[Notify](#)

The Review Status page shows the following information about the component interface you select to expose as a service:

Field or Control	Description
CI Name	Name of the component interface.
Service	Name of the REST service created based on the component interface. Note that the REST service name is the component interface name with <i>CIRT_</i> added as a prefix.

Field or Control	Description
Description	A description of the component interface. This information is taken from the component interface record and displays if it exists.
Status (Service)	Displays the status of the service. The valid values are: • <i>Service does not exist and will be created.</i> Indicates that a services does not exist for the service and the system will create one. • <i>Service Exists.</i> Indicates that a service has already been created for the component interface.
Select	Select the check box to include a method as an operation for the service. If the check box is disabled, the method has already been included in the operation and the Service Operation field displays the name of the operation created. You can select one or more methods at a time.
Action	Displays the action available to perform on the method. The valid values are: • <i>Create Operation.</i> Indicates that no service operation exists for the method and a new service operation can be created. • <i>Create New Version.</i> Indicates that the current request or response shape do not match the shapes previously generated and a new service operation version can be generated. • <i>None.</i> If an operation exists, it compares the component interface and the service operation. The availability of this action indicates that the component interface and the service operation are in sync, no action is required.

Field or Control	Description
Method	Name of the component interface method. You can create service operations based on the following standard component interface methods: • <i>Create.</i> • <i>Get.</i> • <i>Find.</i> • <i>Update.</i> • <i>Updatedata.</i> Update and Updatedata appear if both Get and Save have been enabled in the component interface.
Service Operation	Name of the service operation, if one exists for a method. The name the system gives the service operation depends on the service name as well as the component interface method.
Status (Service Operation)	The status corresponds to the value in the Action field. The valid values are: • <i>Does not exist.</i> No service operation exists for the method. • <i>Does not match.</i> The service operation does not match the existing component interface. • <i>OK.</i> The service operation matches the existing component interface. • <i>Operation created.</i> The system created the operation.
Display Selected Actions	Click the button to display a summary of the actions requested and then generate REST services and service operations.

Related Links

[Selecting Component Interfaces to Expose as REST Services](#)

Generating Component Interface-Based REST Services

This section discusses how to:

- Generate REST services and service operations from component interface methods.
- Inherit component interface security permission lists.

- Add message names and descriptions to generated REST service operations.

Generating REST Services and Service Operations from Component Interface Methods

Use the Confirm Actions page (IB_CISERVICES_SEC) to confirm the component interface and select actions to use for generating REST service operations.

This example illustrates the fields and controls on the Confirm Actions page. You can find definitions for the fields and controls later on this page.

CI-Based Services

Help

Confirm Actions

Actions

FindFirst1 of 1Last

CI Name:QE_BUS_EXPDescription:

Service:CIRT_QE_BUS_EXPService Alias:

Service Status:Service does not exist and will be created.☒ Inherit All CI Permissions

Choose Operation

Select	Action	Method	Service Operation	Alias	Inherit CI Permissions	Version	Message Names and Descriptions
☒	Create Operation.	Update	CIRT_QE_BUS_EXP_U_PUT.V1		☒		Names and Descriptions

Perform Selected Actions

Return to Select CIs

You can work with the following page elements:

Field or Control	Description
Service Alias	(Optional.) Enter an alias name for the service. The name you enter can be lower or mixed-case. If specified, this is the service name that appears in all WSDL documents you generate.
Inherit All CI Permissions	Select the check box so that all service operations you create inherit the security permissions as defined for the component interface after which they are based. By default the check box is selected. To inherit security permissions for specific service operations only, use the Inherit CI Permission check box in the Choose Operation grid. See Inheriting Component Interface Security Permission Lists .
Select	(Optional.) Deselect the check box to omit creating a service operation for a method.
Alias (Service Operation)	(Optional.) Enter an alias name for the service operation. The name you enter can be lower or mixed-case. If specified, this is the service operation name that appears in any WSDL documents you generate.

Field or Control	Description
Inherit CI Permissions	Select the check box for a service operation to inherit the security permissions as defined for the component interface after which it is based. By default the check box is selected for all service operations based off of a component interface. Deselect the check box for each service operation you do not want to inherit the permissions defined for the component interface after which it is based. See Inheriting Component Interface Security Permission Lists.
Version	(Optional.) Service operations created default version <i>V1</i>. You may enter a different value to use as the version when the service operation is created. This field is a text field, so you may enter numeric or text values.
Message Names and Descriptions	(Optional.) Click the link to specify names and descriptions for messages in the service operation. The message names and descriptions will appear in the generated XML message schema. If you do not enter message names or descriptions, PeopleSoft Integration Broker assigns system-generated names to the messages. The following example shows a sample system-generated message name: <i>M702221.V1</i>
Perform Selected Action	Click the button to generate REST services and service operations for the component interface and selected methods. After the REST service and service operations are created, the Review Status page displays and you can review the actions performed as well as access the REST service definition created.
Return to Select CIs	Click the link to return to the previous page, the Review Status page.

Inheriting Component Interface Security Permission Lists

You can specify that all or select component interface-based service operations inherit the security permission list(s) of the component interface from which they are derived. This feature allows you to bypass the process of manually assigning permission lists to the service operations after you generate them.

The Confirm Actions page (IB_CISERVICES_SEC) shown in the previous section contains an **Inherit All CI Permissions** check box located on the upper half of the page. The Choose Operation grid of the page features an **Inherit CI Permissions** check box for each service operation to be generated.

Important! Permission lists granted to a component interface after the service operation is created are not propagated to the service operations and you must manually add them.

<i>Field or Control</i>	<i>Description</i>
Inherit All CI Permissions	Select the check box for all service operations to inherit the permission lists of the component interface from which they are based. By default the check box is selected. Deselect the check box to choose select service operations to inherit the permission list(s) of the base component interface or to manually define permission lists for the service operations in the PeopleTools Security component.
Inherit CI Permissions	Select the check box for each service operation that is to inherit the permission list(s) of the base component interface. Deselect the check box for each service operation this is not to inherit the permission list(s) of the base component.

The system generates service operations for the Update and UpdateData methods based the existence of the Get method. Therefore, the same permissions granted to a component interface's Get method are inherited by service operations based on the Update and UpdateData methods

Related Links


[Generating REST Services and Service Operations from Component Interface Methods](#)

[Setting Permissions to Service Operations](#)

Adding Message Names and Descriptions to Generated Service Operations

The Confirm Actions page features a **Message Names and Descriptions** link for each service operation. Click the link to open the Message Names and Descriptions page (IBCISERVICES2_SEC). On the page you can enter names for each message in the service operations. You can also enter a description for each message name. The message names and description will appear in the generated XML message schema for the service operation.

This example illustrates the Message Names and Descriptions page.

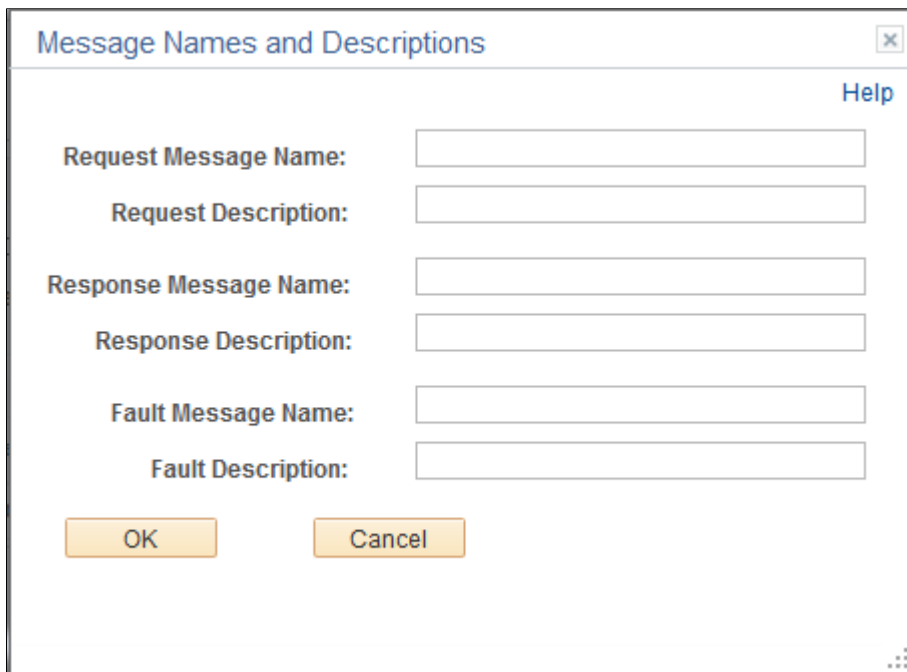

Message Names and Descriptions

Help

Request Message Name:

Request Description:

Response Message Name:

Response Description:

Fault Message Name:

Fault Description:

OK Cancel

In the message name fields, enter a message name. You do not need to append the message name with a version number. The system automatically creates a version for the message as version one, and appends the message name with *.V1*.

When you have completed entering message names and descriptions, click the **OK** button to return to the Confirm Actions page.

Viewing Component Interface-Based REST Service Definitions

After you generate REST services and service operations, the Review Status page (IB_SERVICES2) appears.

Use the page to review the actions performed.

This example illustrates the Review Status page.

CI-Based REST Services

Review Status

Status
Find
First
1 of 1
Last

CI Name QE_BUS_EXP
 Description

Service CIRT_QE_BUS_EXP
 Status Service saved.

[View Service Definition](#)

Choose Method

Select	Action	Method	Service Operation	Status
☐	Create Operation.	Update	CIRT_QE_BUS_EXP_U_PUT.V1	Operation created.
☐	Create Operation.	Get		Does not exist.
☐	Create Operation.	Find		Does not exist.
☐	Create Operation.	Updatedata		Does not exist.

☒ [Select All](#)
☐ [Deselect All](#)

Display Selected Actions

[Return to Select CIs](#)

For example, the previous graphic shows the name of one service operation created as well as the service operation status of *Operation created*.

From this page you can continue to create additional service operations using the remaining available methods for the component interface.

Or, you can click the **Return to Select CIs** link to return to the Select Component Interfaces page to select new component interfaces to generate services and service operations.

You can also click the **View Service Definition** link to view the service definition for the service created.

When you click the **View Service Definition** link the service you created, *CIRT_QE_BUS_EXP_U_PUT.V1* appears in the Services page.

This example illustrates the Services page.

Services

Service CIRT_QE_BUS_EXP ☒ REST Service Type

*Description CIRT_QE_BUS_EXP ☒ Is Provider

Comments

Service Alias CIRT_QE_BUS_EXP

Owner ID

*Namespace http://xmlns.oracle.com/Enterprise/Tools/services

Link Existing Operations View WADL Provide Web Service

Service Operations

Service Operation CIRT_QE_BUS_EXP ?

REST Method: Add

Existing Operations Personalize | Find | View All | First 1 of 1 Last

Operation.Default Version	Alias	Active	Operation Type
CIRT_QE_BUS_EXP_U_PUT.V1	CIRT_QE_BUS_EXP_U_PUT	☒	Synch

Save Return to Search Add

From this page you can perform actions as you would on any other service, including:

- Click the **Provide Web Service** link to generate WSDL for the service.
- Use the fields in the **Service Operations** grid to add additional service operations to the service.
- Click the operation displayed in the **Existing Operations** grid to generate routing definitions, view the response, request or fault messages, view handler details, and more.
- And so on.

Defining Routing Header Properties for CI-Based REST Services

For CI-based REST services, in addition to sending and receiving services in XML format, you can send and receive the services in JSON format as well.

To define routing header properties for CI-based REST services, click the operation displayed in the **Existing Operations** grid on the Services page, and then access the Header Properties tab from the IB Routing Definitions page.

This example illustrates the Header Properties section on the IB Routing Definitions page.

IB Routing Definitions

Routing Definitions

Parameters

Header Properties

Routing Name ~GENERATED~17367744

Request Headers

Personalize | Find | View All |   First  1-2 of 2  Last

Property Name	Comment		
Accept 	text/xml, application/json		
Content-Type 	text/xml, application/json		

Response Headers

Personalize | Find | View All |   First  1 of 1  Last

Property Name	Value	Comment		
				

Save

Return

[Routing Definitions](#) | [Parameters](#) | [Header Properties](#)

Related Links

[Defining Routing Header Properties for Provider REST Service Operations](#)

Managing Service Operation Handlers

Understanding Service Operation Handlers

Messaging handlers, or *handlers* are associated with a service operation on the Handlers tab of the Service Operations page.

Handlers define additional programming to be used with processing the message associated with the service operation.

Service Operation Handler Types

The following are the different types of handlers:

- On Notify
- On Pre-notify
- OnPost-notify
- On Receive
- On Request
- On Response
- On Route
- On Send

Handler Types and Messaging Types

The availability of each handler type depends on the type of service operation you are using. The following tables list the message types used for each service operation type and the handler types available for use.

Table 1: Handler Types and Messaging Types

Service Operation Type	On Notify Handler Type	On Pre-Notify Handler Type	On Post-Notify Handler Type	On Receive Handler Type
Asynchronous one-way	Request message	Request message	Request message	Request message
Asynchronous request / response	Request message	NA	NA	Request message

Service Operation Type	On Notify Handler Type	On Pre-Notify Handler Type	On Post-Notify Handler Type	On Receive Handler Type
Asynchronous to synchronous	Request message	NA	NA	NA
Synchronous	NA	NA	NA	NA

Table 2: Handler Types and Messaging Types (cont.)

Service Operation Type	On Request Handler Type	On Response Handler Type	On Route Handler Type	On Send Handler Type
Asynchronous one-way	NA	NA	Request message	Request message
Asynchronous request / response	NA	Response message	*Request message *Response message	Request message
Asynchronous to synchronous	Request message	Response message	*Request message *Response message	Request message
Synchronous	Request message	NA	Request message	Request message

Note: For On Route with On Send, the message structure is a request message. For On Route with On Receive, the message structure is a response message.

The On Response handler type is used to identify the type of On Notify event to be fired. For example, assume there are four On Notify handlers that are to be fired—three are general On Notify events, that is, the message is processed as part of the request, and the fourth is a response to the original asynchronous request. The fourth one is specified with a handler type of On Response, and the application class selected is the base class OnNotify.

Table 3: Handler Types and Messaging Types (REST service operations).

REST Provider HTTP Method	On Request Handler Type	On Response Handler Type	On Route Handler Type	On Send Handler Type
Delete	NA	NA	NA	NA
Get	NA	NA	NA	NA
Head	NA	NA	NA	NA
Patch	Request message	NA	NA	NA

<i>REST Provider HTTP Method</i>	<i>On Request Handler Type</i>	<i>On Response Handler Type</i>	<i>On Route Handler Type</i>	<i>On Send Handler Type</i>
Post	Request message	NA	NA	NA
Put	Request message	NA	NA	NA

There are no handlers for REST consumer service operations. You may add connector properties to consumer service operations on the routing definition using the [Routings-Connector Properties](#) page or add them dynamically by using PeopleCode.

See [Defining and Overriding Gateway and Connector Properties Using PeopleCode to Manage REST Service Operations](#).

Related Links

[Adding Handlers to Service Operations](#)

Understanding Implementing Handlers

You can implement handlers using application classes, application engine programs, component interfaces, data mover scripts or pre-PeopleTools 8.48 integration PeopleCode constructs.

The following tables list the handlers you can implement using application classes, application engine programs, component interfaces and bulk-load processing.

Note: For REST provider services you may only implement the OnRequest handler using an application class.

Table 1:

<i>Implementation</i>	<i>On Notify Handler</i>	<i>On Pre-notify</i>	<i>On Post-notify</i>	<i>On Receive Handler</i>
Application class	Y	Y	Y	Y
Application Engine	Y	N	N	N
Component interface	Y	N	N	N
Bulk load	Y	N	N	N

Table 2:

Implementation	On Route Handler	On Send Handler	On Request Handler	On Response Handler
Application class	Y	Y	Y	Y
Application Engine	N	N	N	N
Component interface	N	N	Y	Y
Bulk load	N	N	N	N

In addition to the implementation methods listed in the table, there is also a desupported PeopleCode handler (DPC handler) that the system automatically creates for any integration PeopleCode that cannot be migrated to the PeopleTools 8.48 or higher systems.

The handler implementation methods listed in the tables are discussed in greater detail in subsequent sections of this topic.

Related Links

[Implementing Handlers Using Application Classes](#)

[Implementing Handlers Using Application Engine Programs](#)

[Implementing Handlers Using Component Interfaces](#)

[Implementing Handlers Using Bulk Load Processing](#)

[Implementing Handlers Using Deprecated PeopleCode Handlers](#)

Adding Handlers to Service Operations

This section describes how to:

- Add a handler to a service operation.
- Set handler processing sequence.

Understanding Adding Handler Definitions to Service Operations

When you create a handler definition you supply basic information about the handler, then define information specific to the implementation method for the handler.

You can create and use multiple handlers for a service operation. In addition you can set the sequence in which the system performs handler processing.

Handler Processing Sequence

The Sequence field enables you to select the order in which PeopleSoft Integration Broker performs handler processing. A handler with a sequence value of 1 is processed first, followed by that with a value of 2, and so on.

If multiple notification handlers exist and are active, but no sequence is set, the system processes handlers alphabetically.

If an error occurs in a notification, all subsequent handler processing stops until the error is corrected, the service operation is resubmitted, and the handler runs successfully.

In an error situation, the Service Operation Monitor shows a status of *Error* for the handler with the error, and all remaining handlers to be processed are in a status of *New*.

Adding a Handler to a Service Operation

To add a handler to a service operation use the Service Operations – Handlers page (IB_SERVICEHDLR).

This example illustrates the Service Operations – Handlers page.

Service Operation: TEST_SVC_OPERATION					
Default Version: v1					
Operation Type: Asynchronous - One Way					
Handlers					
*Name	*Type	Sequence	*Implementation	*Status	Details
TEST_HNDLR_01	On Notify	3	Application Class	Active	Details
TEST_HNDLR_02	On Notify	1	Application Class	Active	Details
TEST_HNDLR_03	On Notify	2	Application Class	Active	Details

To create a handler definition:

1. Access the Service Operations–Handlers page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions** and click the **Handlers** tab).
2. In the Handlers section, enter a handler name in the **Name** field.

Note that for OnRequest, and OnRoute handlers, you need not enter a name. The system adds a handler name after you provide the handler details.

3. From the *Type* drop-down list box, select the handler type.

The service operation type determines the handler types that are available to choose.

See [Handler Types and Messaging Types](#).

The valid values are:

4. In the **Sequence** field, enter a number to specify the order of processing for the handler.

The **Sequence** field appears only when there are multiple notification handlers defined and active for the service operation.

5. From the **Implementation** drop-down list box, select the method to use to implement the handler.

The handler type determines the available implementation methods.

See [Understanding Implementing Handlers](#).

6. From the **Status** drop-down list box, select a status for the handler.

Values are:

- *Active*. (Default.) Select to make the handler active.
- *Inactive*. Select to make the handler inactive.

7. Click the **Save** button.

Repeat these steps to add additional handlers to the service operation.

Specifying General Handler Details

The details you enter for a handler depend on the implementation method of the handler.

This section describes general handler detail information you must specify for implementing handlers using application classes and component interfaces.

There are additional details you must define for these implementation methods, as well as for application engine and data mover script implementation methods. See the sections for each implementation method for additional information you must specify.

Note: You do not enter handler details for handler implementations using a deprecated PeopleCode handler.

To add general handler details:

1. On the Handlers tab of the Service Operations – Handlers tab, in the Handlers section, click the **Details** link.

The Action Details page appears.

2. In the **Description** field, enter a description for the handler. By default, the system populates this field with the name of the service operation associated with the handler.
3. (Optional.) In the **Comments** field, enter comments about the handler.
4. (Optional.) In the **Handler Owner** field, enter the name of the person or group that owns or maintains the handler.

Related Links

[Implementing Handlers Using Application Classes](#)

[Implementing Handlers Using Application Engine Programs](#)

[Implementing Handlers Using Component Interfaces](#)

[Implementing Handlers Using Bulk Load Processing](#)

[Implementing Handlers Using Deprecated PeopleCode Handlers](#)

Implementing Handlers Using Application Classes

This section provides an overview of implementing handlers using application classes and discusses how to:

- Develop an application class for implementing a handler.
- Specify application class implementation details.

Understanding Implementing Handlers Using Application Classes

You can specify an application class as a handler for a service operation. This is the most typical implementation of a handler.

The process for implementing a handler using an application class is:

1. Develop an application class for implementing the handler.

This process is discussed in this section.

See [Developing Application Classes for Implementing Handlers](#).

2. Add a handler to the service operation.

This process is discussed elsewhere in this topic.

See [Adding a Handler to a Service Operation](#).

3. Specify general handler details.

This process is discussed elsewhere in this topic.

See [Specifying General Handler Details](#).

4. Specify application class details for the handler.

This process is discussed in this section.

See [Specifying Application Class Implementation Details](#).

Developing Application Classes for Implementing Handlers

This section discusses how to develop application classes for implementing service operation handlers.

After you create the application package, you must specify the application package, class and method in the service operation definition as part of the handler details.

Understanding Interfaces and Deriving Application Classes

For each handler type, the following table lists the interface from which to derive the application class. The interfaces are located in the PS_PT application package:

<i>Handler Type</i>	<i>Application Class Interface</i>
On Notify	INotificationHandler
On Post Notify	IPrePostNotification
On Pre Notify	IPrePostNotification
On Response	INotificationHandler
On Receive	IReceiver
On Request	IRequestHandler
On Send	ISend
On Route	IRouter

Understanding Input and Output Parameters

For application class handlers, the names that populate the drop-down used for selecting the appropriate method must have the exact signature required for the method.

<i>Handler Type</i>	<i>Input Parameter to Method</i>	<i>Method Output Parameter</i>
On Notify	Message	Void (none)
On Response	Message	Void (none)
On Receive	Message	Int
On Request	Message	Message
On Send	Message	Message
On Route*	Message	Integer or Boolean

For the On Route handler type, if you select a method that returns as integer, the handler type is On Route Send. If you select a method that returns as Boolean, the handler type is On Route Receive.

Developing an Application Class for Implementing a Handler

To develop an application class for implementing a handler:

1. Select the Integration Broker method that you want to implement based on the type of service operation you are creating.
2. Create a new application class, and import the appropriate Integration Broker application class. For example:

```
import PS_PT:Integration:INotificationHandler;
```

3. Define a class that implements the Integration Broker application class.
4. Define the method that implements the Integration Broker method, with the appropriate signature. In the following example, the OnNotify method would be available as a handler method.

```
class RESPONSE_NOTIFICATION implements PS_PT:Integration:INotificationHandler =>
```

```
method RESPONSE_NOTIFICATION();
method OnNotify(&MSG As Message);
```

```
end-class;
```

5. In the definition of the class, create the program-specific code to be used for this handler.

Specifying Application Class Implementation Details

Before specifying application class implementation details for a handler, you must first create the application class to implement the handler, add a handler to the service operation definition, and specify general handler details.

To specify application class implementation details:

1. On the Service Operations – Handlers tab, in the Handlers section, click the **Details** link.

The Handler Details page appears.

2. Complete the following fields:

<i>Field or Control</i>	<i>Description</i>
Package Name	Enter the package name that contains the class that you want to specify, or use the Lookup button to search for and select one.
Path	Enter the name or names of any subpackages that contain the application class that you want to specify, or use the Lookup button to search for and select one.

<i>Field or Control</i>	<i>Description</i>
Class ID	Enter the name of the application class that contains the method that you want to specify, or use the Lookup button to search for and select one. Only application classes that implement an appropriate base class are shown. The base class is dependent on the handler type.
Method	From the Method drop-down list box, select the method from the selected application class that you want to specify. Only methods with the correct signature for the current handler type are shown.

3. Click the **OK** button.
4. Click the **Save** button.

Implementing Handlers Using Application Engine Programs

This section provides an overview of implementing handlers using application engine programs and discusses how to:

- Specify application engine implementation details.
- Retrieve service operation content from application engine programs.
- View subscription contract status.

Understanding Implementing Handlers Using Application Engine Programs

Application engine handlers are available for notification events (OnNotify) and schedule an application engine program to run within PeopleSoft Process Scheduler to process service operation content. This handler is a good alternative for long-running programs or service operations that have large amounts of data to process, since processing is performed by PeopleSoft Process Scheduler and not in the PeopleSoft Integration Broker runtime environment.

After the service operation is invoked, you can track the process by viewing the subscription contract in the Service Operations Monitor.

When you implement a handler using an application engine program, you must retrieve the transaction ID that you use to get message data from within the application engine program. The run control record PSIBRUNCTL is populated with the transaction ID prior to scheduling the actual application engine program. Note that it is not required to retrieve the transaction ID, therefore any application engine program can be scheduled that does not require initialization parameters via a run control table.

The process for implementing a handler using an application engine program is:

1. Develop the application engine program.

Developing application engine programs is discussed elsewhere in the PeopleTools product documentation.

See “Application Engine Overview” (Application Engine)

2. Add a handler to the service operation.

This process is discussed elsewhere in this topic.

See [Adding a Handler to a Service Operation](#).

3. Specify general handler details.

This process is discussed elsewhere in this topic.

See [Specifying General Handler Details](#).

4. Specify application engine handler implementation details.

This process is discussed in this section.

See [Specifying Application Engine Handler Implementation Details](#).

5. Retrieve service operation content from the application engine program.

This process is discussed in this section.

See [Retrieving Service Operation Content from Application Engine Programs](#).

6. View subscription contract status.

This process is discussed in this section.

See [Viewing Subscription Contract Status](#).

Specifying Application Engine Handler Implementation Details

Before specifying application engine handler implementation details, you must first create the application engine program to process the service operation, add a handler to the service operation definition, and specify general handler details.

To specify application class implementation details:

1. On the Service Operations – Handlers tab, in the Handlers section, click the **Details** link.

The Action Details page appears.

2. In the **Program Name** field, click the **Lookup** button to locate the name of the application engine program to use.
3. Click the **OK** button.
4. Click the **Save** button.

Retrieving Service Operation Content from Application Engine Programs

This section discusses how to:

- Retrieve a transaction ID from an application engine program.
- Instantiate a Message object using a transaction ID.

Understanding Retrieving Service Operation Content from Application Engine Programs

Within the application engine program, you can retrieve the transaction ID and thereby get an instantiated Message object to retrieve the content data respectively.

Retrieving Transaction IDs from Application Engine Programs

Use the `GetIBTransactionIDforAE` method on the `%IntBroker` object to get the transaction ID or simply write the SQL to retrieve the ID.

The following examples show how to get the transaction ID from an application engine program and instantiate a Message object.

Method from `%IntBroker` Object:

```
StrTransaction = %IntBroker.GetIBTransactionIDforAE
(string OperID, string Run Control ID);

&MSG = %IntBroker.GetMessage(StrTransaction, %IntBroker.SUB);
```

Or, you can write code within a SQL step similar to the following:

```
%SelectInit(IBTRANSACTIONID)
  SELECT IBTRANSACTIONID
    FROM PSIBRUNCNTL
   WHERE OPRID = %Bind(OPRID)
  AND RUN_CNTL_ID = %Bind(RUN_CNTL_ID)
```

Or, you can perform a simple `SQLExec` as follows:

```
SQLExec("select ibtransactionid from psibruncntl where oprid = :1 and
run_cntl_id = :2",
j_book_aet.oprid, j_book_aet.run_cntl_id, &ibtransid);
```

Instantiating Message Objects Using Transaction IDs

The following code example shows how to instantiate a Message object using the transaction ID from an application engine program:

```
&MSG = %IntBroker.GetMessage(J_BOOK_AET.IBTRANSACTIONID, %IntBroker.SUB);
```

Viewing Subscription Contract Status

The following table lists the possible contract statuses that may display in the Service Operations Monitor when implementing a handler using an application engine program:

Service Operations Monitor Status	Description
<i>Working</i>	At runtime, the Service Operations Monitor shows a status of <i>Working</i> for the subscription contract when it is picked up by the subscription contract handler.
<i>Submit</i>	After the application engine program is scheduled successfully, the state of contracts changes to <i>Submit</i> in the Service Operations Monitor. This status indicates that the application engine program has been successfully submitted and a process instance has been returned.
<i>Error</i>	• If the program does not get scheduled successfully, the status is set to <i>Error</i> • A Process Monitor status of <i>Error</i> will change the subscription contract status in the Service Operations Monitor to Error. You must read the error details from the Process Monitor Details page, since the Service Operations Monitor does not have access to the Process Monitor error tables.
<i>Done</i>	When the application engine program has been processed successfully, the status of the contract in the Service Operations Monitor is <i>Done</i> .
<i>Cancel</i>	• For application engine programs that have Process Monitor status of <i>Cancel</i> or <i>Delete</i>, the status of the subscription contract in the Service Operations Monitor is changed to <i>Cancel</i>. • If the instance is deleted from the process scheduler table then the status of the subscription contract is <i>Cancel</i>. This will clear out the contract in the partitioned queue so that the next contract in sequence can be processed.

Note: In the Service Operations Monitor the *Submit* status has the same behavior as the *Working* status, thus proper queue partitioning behavior is maintained. Therefore, intelligent queue partitioning should be taken into account for service operations using the application engine handler.

A Subscription Contract processing an application engine handler cannot be cancelled or resubmitted from the Service Operations Monitor, but rather must be done in the Process Monitor. Once you resubmit or cancel the program in the Process Monitor, the status is updated for the subscription contract. Refresh the Service Operations Monitor page to view the updated status. Note that there could be a delay from when the time you cancel or resubmit the application engine program in the Process Monitor and when the update is seen in the Service Operations Monitor. In addition, at least one Pub/Sub domain must be active for this status update to happen.

Implementing Handlers Using Component Interfaces

You can implement a component interface as a handler to access extant business rules and processes to be used with the service operation data.

Understanding Implementing Handlers Using Component Interfaces

This section provides an overview of implementing handlers using component interfaces.

You can only use a component interface for On Notify, On Request and On Response handler types.

Component interfaces can be used as handlers for asynchronous and synchronous service operations. Asynchronous service operations should only be used with component interface methods that do not require a response, such as Update or Insert.

You must expose a component interface as a service before you can implement any of the component interface methods as handler actions.

The standard methods for a component interface (such as Find, Get, Save, Update, and so on) are automatically available for a handler. However, if you want to use a user-defined method, you must include the keyword **Doc** as part of the signature.

The process for implementing a handler using a component interface is:

1. Expose the component interface as a service.
See [Selecting Component Interfaces to Expose as Services](#).
2. Add a handler to the service operation.
See [Adding a Handler to a Service Operation](#).
3. Specify general handler details.
See [Specifying General Handler Details](#).
4. Specify component interface handler implementation details.
See [Specifying Component Interface Handler Implementation Details](#).

Specifying Component Interface Handler Implementation Details

Before specifying component interface handler implementation details, you must first create a service from the component interface, add a handler to the service operation definition, and specify general handler details.

To specify component interface implementation details:

1. On the Service Operations – Handlers tab, in the Handlers section, click the **Details** link.

The Action Details page appears.

2. In the **Name** field enter the component interface name, or use the **Lookup** button to search for and select one.
3. From the **Action** drop-down list box, select an action.
4. Click the **OK** button.
5. Click the **Save** button.

Implementing Handlers Using Bulk Load Processing

This section provides an overview of implementing handlers using the bulk load processing and discusses how to:

- Enable transactional rollback.
- Enable table truncation.
- Specify XML attributes for nonrowset-based messages.
- Add data structures to nonrowset-based messages.

Understanding Implementing Handlers Using the Bulk Load Handler

You can bulk load large amounts of data (large messages) into a local table using the bulk load handler.

Note: Bulk load handlers are allowed only on asynchronous service operations and only one bulk load handler is allowed per service operation.

When you implement a handler using a data mover script use the OnNotify event. When the OnNotify event is fired, the message data is inserted into the tables. Bulk load handlers do not perform any data validation.

Bulk Load Handler Message Types

You can use bulk load handlers for service operations that contain the following types of asynchronous messages:

- Rowset-based messages.

For service operations that contain rowset-based messages, the message structure determines processing.

- Nonrowset-based messages.

For service operations that contain nonrowset-based messages, you define the structure for processing by mapping data to PeopleSoft records and providing attribute names and values.

- Container messages that contain rowset-based messages parts.

For service operations with container messages that contain rowset-based message parts, the bulk load handler uses the message structure of the message parts to determine processing.

Transactional Rollback

Bulk load handler processing is *destructive load processing*, meaning that the handler deletes existing data from the table and then bulk inserts the new data.

PeopleSoft Integration Broker provides an optional transaction rollback feature that enables you to rollback the database to the pre-bulk insert state if needed.

Transactional rollback is dependent on the bulk size of the data to be updated. Therefore, when you select the rollback option, a **Rollback Size** field appears where you specify a rollback value. The default value is 32 kilobytes.

Table Truncation

By default, the bulk load handler truncates table data before performing any processing.

PeopleSoft Integration Broker enables you to disable table truncation.

Nonrowset-Based Messages and the Bulk Load Handler

If a service operation contains a nonrowset-based message, you must add a data structure to define the message content, thereby allowing non-PeopleSoft data to map to the records and fields in the database.

In addition, you can provide an XML attribute name/value pair to distinguish record and field nodes on incoming XML content.

Process Overview for Implementing Handlers Using Bulk Load Handlers

The process for implementing a bulk load handler is:

1. Add a bulk load handler to the service operation on the target system.

This procedure is discussed elsewhere in this topic.

See [Adding a Handler to a Service Operation](#).

2. Specify general handler details.

This procedure is discussed elsewhere in this topic.

See [Specifying General Handler Details](#).

3. (Optional.) Enable transactional rollback and the rollback size.

This procedure is discussed in this section.

4. (Optional.) Specify XML record attributes.

This procedure is discussed in this section.

5. Add the data structure for the message contained in the service operation.

The step is required only when a nonrowset-based message is contained in the service operation.

This procedure is discussed in this section.

Enabling Transactional Rollback

The Bulk Load Handler page (IB_SERVICEHDL5_SEC) features a **Rollback Non-Destructive Load** option that you can set to enable transaction rollback.

This example illustrates the Bulk Load Handler page. The example shows the page when the service operation contains a nonrowset-based message.

Bulk Load Handler

☐ Rollback Non-Destructive Load

☒ Truncate Table(s)

XML Record Indicator Attribute

Attribute Name:

Attribute Value:

[Add Record to Root](#)

Left | Right

☐ Data Structure

The previous example shows the Bulk Load Handler page that displays when the service operation contains a nonrowset-based message.

If the service operation contains a rowset-based message, the page does not display the XML attribute fields or the data tree structure controls.

This example illustrates the Bulk Load Handler page. The example shows the page when the service operation contains a rowset-based message.

Bulk Load Handler

☐ Rollback Non-Destructive Load

☒ Truncate Table(s)

Note: Transactional rollback is not supported if message segments are used. Transactional rollback will automatically be disabled if the message being processed contains more than one message segment.

To enable rollback processing:

1. On the Service Operations – Handlers tab, in the Handlers section, click the **Details** link.

The Bulk Load Handler page appears.

2. Select the **Rollback Non-Destructive Load** check box.

The **Rollback Size** field appears.

3. In the **Rollback Size** field, enter a rollback size value, in kilobytes.

The amount of data that you can rollback is depends on your database.

The default is 32.

Warning! Before you specify a rollback size value, verify the rollback size configured for your database. If the rollback size value specified in the PeopleSoft Pure Internet Architecture is greater than the transactional rollback size configured on the database, then transactional rollback will be disabled for that particular transaction, thereby causing destructive load processing to take place. To avoid destructive load processing, modify the rollback size configured for your database so that it is greater than the value you specify on the Bulk Load Handler page.

4. Click the **Save** button.

Enabling Table Truncation

The Bulk Load Handler page features a Truncate Table(s) option that you can set so that the system truncates the database table(s) prior to handler processing. The option is located under the Non-Destructive Load option on the Bulk Load Handler page.

By default, the **Truncate Table(s)** option is enabled and the PeopleSoft system performs table truncation. However, if you do not wish to perform table truncation you can deselect the option to disable table truncation.

To enable/disable table truncation:

1. Access the Bulk Load Handler page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions** and click the **Handlers** tab. Click the **Details** link for the bulk load handler).
2. On the **Truncate Table(s)** check box perform one of the following options:
 - To enable table truncation, select the check box.
 - To disable table truncation, deselect the check box.
3. Click the **OK** button.

Specifying XML Record Attribute Values

Use the **XML Record Indicator Attribute** check box on the Bulk Load Handler page to distinguish and specify records and fields on incoming XML content of nonrowset-based messages.

This example illustrates a partial view of the Bulk Load Handler page. The example shows the XML Record Indicator Attribute section of the page that you use to specify an attribute name and value for nonrowset-based messages.



XML Record Indicator Attribute	
Attribute Name:	
Attribute Value:	

When you specify an attribute name and value, the system recognizes content with that name and value as a record. Content placed in the message after that attribute name/value pair is considered child data.

When the service operation contains a nonrowset-based message, you must specify an attribute name and attribute value. If you do not supply values for these fields, an error message appears. These fields are optional when the service operation contains a rowset-based message.

To specify XML record attribute values:

1. Access the Bulk Load Handler page (**PeopleTools** > **Integration Broker** > **Integration Setup** > **Service Operation Definitions** and click the **Handlers** tab. Click the **Details** link for the bulk load handler).
2. In the **Attribute Name** field, enter the attribute name that the system should recognize as the record.
For example, *Class*.
3. In the **Attribute Value** field, enter the value for the attribute name.
For example, *R*.
4. Click the **Save** button.

Adding Data Structures for Nonrowset-Based Messages

This section discusses how to:

- Build data structures for nonrowset-based data structures.
- Insert nonrowset-based messages in project definitions.

Building Nonrowset-Based Data Structures

The Bulk Load Handler details page provides a data tree, similar to that found in the Messages component, that you use to build the structure of the nonrowset-based message.

You must define a minimum of one record to save the handler definition.

For building the data structure you use the same graphical user interface and procedures that you would for managing rowset-based messages in the Messages component.

By clicking the **Add Record to Root** link you can begin to create the data structure by adding a root record. As with the Messages component, you can select to include or exclude fields and specify field

aliases. One unique difference here, however, is that you can build structures with multiple level 0 records. At save time, the system builds a message for each level 0 record found in the structure.

Note that message references are not allowed.

Message structures you create on the Bulk Load Handler details page are not accessible in the Messages component and appear only as part of the bulk load handler.

The message names start with `~IB_M_DMS~`.

See the documentation elsewhere in the product documentation for managing rowset-based messages for creating the data structure. Again, even though here you are building the structure of a nonrowset-based message, you will use the same graphical user interface and procedures as those for working with rowset-based messages.

See [Managing Rowset-Based Messages](#).

Inserting Nonrowset-Based Messages in Project Definitions

You must assign nonrowset-based messages you create using the Bulk Load Handler page to a bulk load handler. To accomplish this task, in PeopleSoft Application Designer when you insert a service operation handler definition into a project, you must include the message(s) as a related definition.

This example illustrates the Insert into Project page.

Insert into Project

Definition Type: Service Operation Handlers

Selection Criteria
Name:

Related Definitions
Messages

Buttons: Insert Close New Search Select All

Definitions matching selection criteria:

Service Operation Names	Service Operation Handler Names
QE_FLIGHTPLAN	GEN_UPG_HANDLER_21703
QE_FLIGHTPLAN_ASYNC COMBO	GEN_UPG_HANDLER_11824
QE_FLIGHTPLAN_ASYNC COMBO	GEN_UPG_HANDLER_13763
QE_FLIGHTPLAN_ASYNC COMBO	GEN_UPG_HANDLER_15912
QE_FLIGHTPLAN_SYNC	REQUESTHDLR
QE_FLIGHTPLAN_SYNC COMBO	REQUESTHDLR
QE_FLIGHTPLAN_TRANSFORM	GEN_UPG_HANDLER_16973
QE_FLIGHTPLAN_TRANSFORM	GEN_UPG_HANDLER_22671
QE_FLIGHTPLAN_UNSTRUCT	BULK_LOAD_TEST
QE_FLIGHTPLAN_UNSTRUCT	GEN_UPG_HANDLER_13639
QE_FLIGHTPLAN_UNSTRUCT	GEN_UPG_HANDLER_24068

236 definition(s) found

To insert a service operation handler definition and related message definitions into a project:

1. In PeopleSoft Application Designer, from the Insert menu, select Definitions into Project.

The Insert into Project page appears.

2. From the **Definition Type** drop-down list box, select Service Operation Handlers.
3. Click **Insert** to view all service operation definitions and handlers in the system.
4. Click the name of the service operation and handler to insert into the project.
5. In the Related Definition section, click **Messages**.
6. Click the **Insert** button to insert the service operation, handler, and related messages into the project.

Implementing Handlers Using Deprecated PeopleCode Handlers

This section discusses the deprecated PeopleCode handler and using the Service Administration – Deprecated PeopleCode page to delete deprecated PeopleCode handlers.

Understanding the Deprecated PeopleCode Handler

During the upgrade process, the PeopleSoft system creates a deprecated PeopleCode handler (DPC handler) for any integration PeopleCode that cannot be migrated from a PeopleTools 8.47 or earlier system to a PeopleTools 8.55 system. Deprecated handlers enable you to run PeopleTools 8.47 and earlier PeopleCode (subscription or OnRequest). However, PeopleSoft recommends that you correct the PeopleCode and migrate the code into an Application Class type handler for use in PeopleTools 8.55 systems.

Deleting Deprecated PeopleCode Handlers

Use the Service Administration – Deprecated PeopleCode page (IB_HOME_PAGE8) to delete deprecated PeopleCode and its associated handler(s).

To access the page select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Deprecated PeopleCode** tab.

This example illustrates the Service Administration – Deprecated PeopleCode page.

Service System Status: Development

Note: Deleted Deprecated PeopleCode can not be recreated. Deletion occurs at the Service Operation level. If a Service Operation contains multiple deprecated PeopleCode items, deleting one of the items causes the deletion of all of them.

▼ Delete

Service Operation:

Select	Service Operation	Handler Name	Handler Alias	Results
☐				

The page enables you to delete the PeopleCode that was assigned to the Pre-PeopleTools 8.48 subscription, along with the (deprecated) handler that was created to invoke the PeopleCode.

Warning! Deleted deprecated PeopleCode cannot be recreated.

To delete a deprecated PeopleCode handler:

1. Access the Service Administration – Deprecated PeopleCode page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin** and click the **Deprecated PeopleCode** tab).
2. In the **Service Operation** field, enter the name of the service operation that contains the deprecated PeopleCode handler, or click the **Lookup** button to search for one.
3. Click the **Search** button.

The search results appear in the Deprecated PeopleCode Handler grid.

4. Select the **Select** check box next to the handler to delete.
5. Click the **Delete** button.

Managing Service Operation Routing Definitions

Understanding Routing Definitions

This section provides overview information about routing definitions.

Routing Definitions

A routing definition defines the sending and receiving nodes for a transaction, specifies any inbound and outbound transformations to invoke and defines external aliases. It also defines overrides that the default integration gateway and the default target connector that the local node use to communicate with an integration endpoint.

Routing Types

There are four routing types:

<i>Term</i>	<i>Definition</i>
Any-to-local	An any-to-local routing enables the local node to receive transactions from any node. This routing type is for inbound transactions only and the “any” node is always the sending node. You can use this routing type for all service operation types, except for asynchronous-to-synchronous service operations.
Local-to-local	A local-to-local routing is a routing in which transactions are sent and received within the local database. When working with synchronous service operations, you have the option to generate transactional routings, whereby the OnRequest event will run under the existing transaction boundary of the component.
Local-to-Atom	A local-to-Atom routing is used exclusively with feeds functionality. See Feed Publishing Framework.
Point-to-point	A point-to-point routing requires that specific nodes that you define send and receive a transaction.

Defining Routing Definitions

A routing definition must exist on each system that is participating in a particular transaction.

For example, let's say that System A is going to send a service operation to System B and a point-to-point routing needs to be created between the two systems. Further, the local node on System A is called *Node A*, and the local node on System B is called *Node B*.

System A and System B need to have the identical service operation defined on each of their systems.

In addition, System A needs to have an outbound routing definition defined on its system that specifies its local node, *Node A*, as the sending node. The routing definition must specify System B's local node, *Node B*, as the receiving node.

System B needs to have an inbound routing definition defined on its system that specifies its local node, *Node B*, as the receiving node. The routing definition on System B also needs to specify System A's local node, *Node A*, as the sending node.

The exception to this is when a receiving system generates an any-to-local routing for a service operation. If the receiving system has an any-to-local routing definition defined for a particular service operation, it will accept requests from any node without the need of a specific point-to-point routing definition.

So using the examples of System A being the sending system and System B being the receiving system, this is what happens when an any-to-local routing is defined. System A still needs to have a routing definition defined on its system where its local node, *Node A*, is defined as the sending node, and System's B local node, *Node B*, is defined as the receiving node. On System B, when the any-to-local routing was generated, the PeopleSoft system automatically populated System B's local node, *Node B*, as the receiving node and listed the value of *~Any~* as the sending node to designate that the system will accept the service operation specified on the routing from any node.

Methods for Generating and Defining Routing Definitions

This section discusses methods of generating and defining routing definitions.

System-Generated Routing Definitions During Upgrade

If upgrading from a PeopleTools 8.47 or earlier release, during the upgrade process the PeopleSoft system creates routing definitions from node transaction and relationship data defined in your earlier PeopleTools 8.4x release.

System-Generated Routing Definitions During Consuming Services

When you consume a service using the Consume Web Service wizard, the system creates PeopleSoft integration metadata for the imported service, including routing definitions.

System-Generated Routing Definitions at Runtime

The PeopleSoft system can generate any-to-local and local-to-local routing definition for you. The system takes integration metadata from the service operation, including service operation name, service operation version, service operation type, local node information, and other data, and generates a routing definition.

If you make any subsequent modifications to the service operation, you can regenerate the routing definition to reflect the changes. In addition, at any point you can open the definition and manually

modify it to include transformations, as well as override default integration gateway and target connector settings.

You use the Service Operations-General page to generate any-to-local and local-to-local routing definitions.

You may also manually create local-to-local routing definitions. However, you must always system-generate any-to-local routing definition.

See [Managing System-Generated Routing Definitions](#).

User-Defined Routing Definitions

When you require a point-to-point routing, you must manually create it. You can also manually create local-to-local routing definitions.

However, you must always system generate any-to-local routing definitions.

To create user-defined routing definitions, use the Routings component or the Service Operations-Routings page.

See [Adding Routing Definitions](#).

Summary of Methods for Creating and Generating Routing Definitions

The following table summarizes the method for generating and defining routing definitions:

<i>Routing Type</i>	<i>System-Generated</i>	<i>User-Defined</i>
Any-to-local	Yes	No
Local-to-local	Yes	Yes
Point-to-point	No	Yes

Routing Definition Naming Conventions

The following table lists the naming conventions for routing definitions:

<i>Method for Generating and Creating Routing Definitions</i>	<i>Convention</i>	<i>Description</i>
System-generated during upgrade.	~GEN_UPG~<unique number> For example: ~GEN_UPG~10062	Routing definitions generated during the upgrade process. These may be any-to-local, local-to-local, or point-to-point routing definitions.

Method for Generating and Creating Routing Definitions	Convention	Description
System-generated at runtime.	~GENERATED~<unique number> For example: ~GENERATED~15312	Routing definitions generated by the PeopleSoft system from the Service Operations-General tab. These routing definitions are any-to-local or local-to-local.
System generated by the Consume Web Service wizard.	~IMPORTED~<unique number> For example: ~IMPORTED~14857	Routing definitions generated using the Consume Web Service wizard.
User-defined.	Up to 30 characters, no spaces. For example: <i>QE_ROUTING</i> . No special characters, such as dots (“.”) and slashes (“/” or “\”), are permitted.	Manually created point-to-point routing definitions and local-to-local routings. You can also rename system-generated routing definitions using the Service Administration component.

Routing Definition External Aliases

When working with routing definitions you have the option of creating a routing alias. This alias is used as a SOAPAction attribute in the WSDL binding to identify the service operation in the Integration Broker metadata.

The routing external alias defaults to `<ServiceOperationAlias>.<Version>`, if present. Otherwise it defaults to `<ServiceOperation>.<Version>`.

In an asynchronous request/response any-to-local routing, the outbound routing alias format is `<AliasName>_CALLBACK.<Version>`.

For inbound transactions you can fire multiple service operations for one invocation when external aliases on the routing definition are the same for each service operation. This is called service operation mapping.

Related Links

[Searching for Duplicate External Routing Aliases](#)

[Service Operation Mapping](#)

Service Operation Mapping

You can map inbound asynchronous transactions to one or more service operations by specifying the name of the inbound transaction as the external alias on the routing for each service operation that you want to invoke.

Note: Service operation mapping is supported for inbound asynchronous transactions only.

For example, there is an inbound asynchronous transaction from SAP called *Customer_SAP*. However, the service operation contained in that transaction maps to two service operations on the PeopleSoft system, *Customer_Get* and *Customer_Update*. To invoke both service operations, change the external

alias name on the inbound routing definition for the *Customer_Get* and *Customer_Update* service operations to *Customer_SAP*. When the routings are determined at runtime for this external service operation name, PeopleSoft Integration Broker will find both service operations (*Customer_Get* and *Customer_Update*) and process them accordingly.

Graphical Routings View

The Routing Definitions page provides a **Graphical View** link that enables you to view routing definitions in graphical format. The graphical routings view is intended to provide you with a view of the flow of data between integration partners.

Related Links

[Viewing Routing Definitions in Graphical Format](#)

Integration Status

When you use the **Graphical View** link to view a routing definition in graphical format, an **Integration Not Active** link displays if any metadata associated with the integration is inactive. Inactive metadata might include the routing definition, the service operation, a service operation handler, and so on.

If you click the **Integration Not Active** link an Integration Status page appears and you can view activate the metadata.

Managing System-Generated Routing Definitions

This section discusses how to:

- View system-generated routing definition status.
- Initiate system-generated routing definitions.
- Regenerate system-generated routing definitions.

Understanding Managing System-Generated Routing Definitions

The PeopleSoft system can automatically generate any-to-local and local-to-local routing definitions when you save a service operation definition.

After the system generates the routing definition, you can view and fine-tune the definition as needed using the pages in the Routings component.

In addition, if you make any changes to a service operation after the system has generated a routing definition for it, you can have the system regenerate a routing definition. However, any modifications made to the routing definition are lost when you regenerate it.

Viewing System-Generated Routing Definition Status

The Service Operations – General page (IB_SERVICE) features a **Routing Status** check box that you can use to verify if any system-generated routing definitions exist for a service operation. To access the page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates the **Routing Status** group box on the Service Operations – General page.



Routing Status	
Any-to-Local:	Does not exist
Local-to-Local:	Does not exist
Local-to-Atom:	Does not exist.

When an any-to-local, local-to-local, or local-to Atom routing definition exists for the service operation, the corresponding field displays a status of *Exists*. When no routing definition exists, the corresponding field displays *Does not exist*.

Note: The system generates a Local-to-Atom routing definition when you publish a service operation as a feed. Using and managing feeds is described elsewhere in the product documentation.


See the product documentation for [Feed Publishing Framework](#).

Initiating System-Generated Routing Definitions

The Default Service Operation Version section of the Service Operations-General page features a Routing Actions Upon Save group box where you can choose the type of routing to generate, any-to-local or local-to-local.

To access the Service Operations-General page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

This example illustrates the Routings Actions Upon Save group box that appears on the Service Operations – General page when you are working with an asynchronous service operation definition.

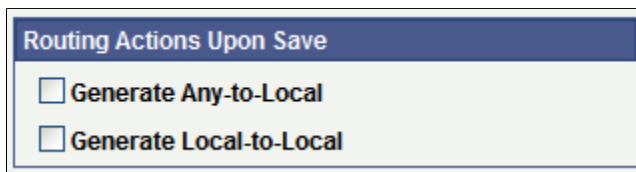

Routing Actions Upon Save	
☐	Generate Any-to-Local
☐	Generate Local-to-Local

The previous example shows the **Routing Actions Upon Save** group box that appears when you are working with an asynchronous service operation definition. When you are working with a synchronous service operation definition, the group box features an additional control.

This example illustrates the **Routings Actions Upon Save** group box that appears on the Service Operations – General page when you are working with a synchronous service operation definition.

The image shows a screenshot of a software interface titled "Routing Actions Upon Save". It contains three checkboxes with labels: "Generate Any-to-Local", "Generate Local-to-Local", and "Transactional". All three checkboxes are currently unchecked.

When you select **Generate Local-to-Local**, the **Transactional** check box becomes available for selection. By choosing the **Transactional** check box, the system routes the service operations using the OnRequest event on a single transaction.

When you initiate system-generated any-to-local or local-to-local routings, PeopleSoft Integration Broker checks to see if the routing you are initiating is already in the system. This situation can arise when any-to-local and local-to-local routings are created in another database and are imported into the current database. If the routing already exists in the current database, a message appears indicating so and no new routing is generated. You must remove the routing before generating a new one.

See [Deleting Duplicate Routing Definitions](#).

Note: Any-to-Local routing definitions are read-only, with the exception of the external alias name and transform information. You may need to change the external alias name for WSDL generation.

To initiate a system-generated routing definition:

1. From the Service Operations-General page, locate the Default Service Operation Version section.
2. In the Routing Actions Upon Save group box select one of the following options:
 - *Generate Any-to-Local*. Generates an any-to-local routing definition when you save the service operation record.
 - *Generate Local-to-Local*. Generates a local-to-local routing definition when you save the service operation.

If working with a synchronous service operation, click the **Transactional** check box if you want to generate a transactional local-to-local routing.

3. Click the **Save** button.

When you save the service operation the system generates the routing definition that you selected.

After you save the service operation definition the Routing Status group box displays a status of *Exists* for the routing definition generated.

To view the routing definition, click the Service Operations – Routings tab and click the name of the routing. The Routing Definitions page appears and you can view and modify routing definition details.

Related Links

[Routing Definition Naming Conventions](#)

[Defining General Routing Information](#)

[Defining Routing Parameters](#)

[Defining and Overriding Gateway and Connector Properties](#)

Regenerating System-Generated Routing Definitions

If a system-generated routing exists for a service operation and you change some aspect of the service operation, you can have the system regenerate the routing definition. However, any modifications made to the routing definition are lost when you regenerate it.

To initiate the regeneration of a routing definition, use the Routing Actions Upon Save box on the Service Operations-General page to regenerate the routing. To access this page select **PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**.

To regenerate a system-generated routing definition:

1. Access the Service Operations-General page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions**).
2. On the page, locate the Default Service Operation Version section.
3. In the Routing Actions Upon Save group box select one of the following options:
 - *Regenerate Any-to-Local*. Regenerates an any-to-local routing definition when you save the service operation definition.
 - *Regenerate Local-to-Local*. Regenerates a local-to-local routing definition when you save the service operation.
4. Click the **Save** button.

When you save the service operation the system regenerates the routing definition that you selected.

After you save the service operation record the Routing Status group box displays a status of *Exists* for the routing definition generated.

Adding Routing Definitions

This section discusses how to:

- Add a routing definition.
- Define general routing definition information.
- Define routing parameters for requests and responses.
- Define routing properties.
- Define and override gateway and connector properties.

Understanding Adding Routing Definitions

The following table describes the locations within the PeopleSoft system where you can add routing definitions:

Page	Page Object ID	Component	Component Object ID	Navigation
Routings Definition	IB_ROUTINGDEFN	Routings	IB_ROUTINGDEFN	PeopleTools > Integration Broker > Integration Setup > Routing Definitions .
Service Operations - Routings	IB_SERVICERTNGS	Service Operations	IB_SERVICE	PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions and click the Routings tab.
Node - Routings	IB_NODEROUTINGS	Nodes	IB_NODE	PeopleTools > Integration Broker > Integration Setup > Node Definitions and click the Routings tab.

Note: When using the RSS feeds functionality you may need to create a routing definition for a non-default service operation version. The only location that you can add a routing definition for a non-default service operation version is in the Routings component.

Note: You cannot add routings to the system for REST-based services. You can only use system generated routings (any-to-local or local-to-local) for REST-based services.

Adding Routing Definitions Using the Routings Component

This section describes adding routing definitions using the Routings component (IB_ROUTINGDEFN).

To add a routing definition using the Routings component you first add the definition to the system and then configure the routing.

Use the Routing Definitions – Add a New Value page to add the definition to the system. To access the page select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Routing Definitions** and click the **Add a New Value** tab.

This example illustrates the Routing Definitions – Add a New Value page.

To add a routing record using the Routings component:

1. Select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.
2. Click the **Add a Value** tab.
3. In the **Routing Name** field, enter a name for the routing definition.
4. Click the **Add** button.

The routing definition is added to the system and the Routing Definitions page appears where you can define the routing details.

See [Defining General Routing Information](#).

Adding Routing Definitions From Service Operation Definitions

When working in a service operation definition, you can use the Service Operations – Routings page (IB_SERVICERTNGS) to add a routing definition to the service operation. To access the Service Operations – Routing page select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Routings** tab.

This example illustrates the Service Operations – Routings page.

Selected	Name	Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results
☒	~GEN~UPG~20198	VERSION_1	Synch	QE_LOCAL	QE_IBTGT	Outbound	Active	

When you are adding a routing definition for a synchronous service operation, the system displays a **User Exception** check box at the top of the page. Select the check box to capture any exceptions that occur before the system validates an outbound routing for the service operation. This option enables you to capture errors such as inactive routing definitions, multiple routing definitions, any errors that result from

running the OnRouteSend PeopleCode event, and other initialization errors. When the **User Exception** option is enabled and if an exception does occur before a routing can be validated, the system returns a response message to the integration partner that contains the exception.

To add a routing definition from a service operation definition:

1. Access the Service Operations - Routings page (**PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions** and click the **Routings** tab).
2. (Optional.) Select the **User Exception** check box to capture exceptions before routing validation.
3. In the **Routing Name** field, enter a name for the routing definition.
4. Click the **Add** button.

The routing definition is added to the system and the Routing Definitions page appears where you can define the routing details.

See [Defining General Routing Information](#).

Adding Routing Definitions Using the Nodes Component

This section describes adding routing definitions using the Nodes component (IB_NODEROUTINGS).

To add a routing definition using the Nodes component you first add the definition to the system and then configure the routing.

Use the Nodes – Routings page to add the definition to the system. To access the page select **PeopleTools > Integration Broker > Integration Setup > Node Definitions** and click the **Routings** tab.

This example illustrates the Nodes – Routings page.

Node Name: TEST_NODE

Routing Name: **Add**

Selected	Name	Service Operation	Service Operation Version	Operation Type	Sender Node	Receiver Node	Direction	Status	Results
☐									

To add a routing definition from the Nodes-Routings page:

1. Access the Nodes-Routings page (**PeopleTools > Integration Broker > Integration Setup > Node Definitions** and click the **Routings** tab).
2. In the **Routing Name** field, enter a name for the routing definition.
3. Click the **Add** button.

The routing definition is added to the system and the Routing Definitions page appears where you can define the routing details.

See [Defining General Routing Information](#).

Configuring Routing Definitions

This section discusses how to:

- Define general routing information.
- Define routing parameters.
- Define and override gateway and connector properties.
- Define routing properties.

Defining General Routing Information

After you add a routing definition to the system use the pages of the Routing component to define the routing details. Use the Routings – Routing Definitions page to define general routing information.

To access the Routing Definitions page, select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.

This example illustrates the fields and controls on the Routings – Routing Definitions page when you are working with a synchronous service operation. You can find definitions for the fields and controls later on this page.

Routing Definitions		Parameters	Connector Properties	Routing Properties
Routing Name	GETSUBITEMS			☒ Active
*Service Operation	GETSUBITEMS			☐ System Generated
Version	V1			
*Description	GETSUBITEMS			Graphical View
Comments	GETSUBITEMS			
*Sender Node				
*Receiver Node	WSDL_NODE			
Operation Type	Synchronous			☐ User Exception
Owner ID				
*Log Detail	Header and Detail			
OnSend Handler				

The fields that appear on the Routing–Routing Definitions page vary based on if you are defining a routing for a synchronous service operation or an asynchronous service operations.

The various ways to access this page are discussed in the previous section.

See [Understanding Adding Routing Definitions](#).

When you add a routing definition from a service operation record, the PeopleSoft system automatically populates some of the data on this page based on the data in the service operations record from which you created the routing. Automatically populated data includes the service operation name, version, and routing type.

Field or Control	Description
Routing Name	Indicates the name of the routing definition. This name is specified when you add a routing definition to the system.
Service Operation	Enter the name of the service operation that will use the routing. If you access the Routings component from the Service Operations – Routings tab, PeopleSoft Integration Broker automatically populates this information.
Active	(Optional.) Select the check box to activate the routing. By default, new routing definition are active. If any of the referenced nodes are inactive, you cannot activate the routing.
System Generated	When selected, indicates that the PeopleSoft system generated the routing definition.
Version	Indicates the version of the service operation selected.
Description	Description of the routing definition. If you do not enter a description, this value defaults to the name of the service operation associated with the routing definition upon save.
Graphical View	Click this link to view saved routing definitions in graphical format. See Viewing Routing Definitions in Graphical Format .
Comments	(Optional.) Enter comments about the routing definition.
Sender Node	Enter the name of the sending node.
Receiving Node	Enter the name of the receiving node.

Field or Control	Description
Unordered Segments	(Optional.) Select the check box to indicate that system should process the service operation messages in parallel. The Unordered Segments check box appears only under the following conditions: • The local node is the receiving node. • After you save the initial routing definition This feature is frequently used in conjunction with the OnPreNotify Handler and OnPostNotify Handler fields to perform pre- or post-processing on segmented messages.
Operation Type	Indicates the service operation type. PeopleSoft Integration Broker automatically populates this information when you select the service operation.
User Exception	The User Exception check box displays only for synchronous service operations. (Optional.) Select the check box to enable exception handling using PeopleCode. When enabled and an error occurs you can handle any errors in the calling PeopleCode. If not enabled any errors that occur cause the program to stop.
Owner ID	(Optional.) From the drop-down list box, select the owner of the definition. The owner ID helps to determine the application team that last made a change to the definition. The values in the drop-down list box are translate table values that you can define in the OBJECTOWNERID field record.
OnPreNotify Handler	(Optional.) From the drop-down list box, select an OnPreNotify handler to perform pre-processing on segmented messages being processed in parallel by the system. This page control appears only when the Unordered Segments check box is selected.
OnPostNotify Handler	(Optional.) From the drop-down list box, select an OnPostNotify handler to perform post-processing on segmented messages being processed in parallel by the system. This page control appears only when the Unordered Segments check box is selected.

Field or Control	Description
Accept Compression	(Optional.) The Accept Compression check box displays only for inbound synchronous non-REST service operations. Setting compression for REST service operations is discussed elsewhere in the product documentation. See Setting Compression for REST Service Operations. Select the check box for the system to send the response to the consumer compressed. You must compress the response before sending, using PeopleCode or by setting the Min Message Size Compression parameter in PSAdmin. You can override the compression of the response using PeopleCode by setting the CompressionOverride property on IBInfo. The following example shows sample PeopleCode to override compression of the response message: <pre>&MSG.IBInfo.CompressionOverride = %IntBroker_Compress; Set/Get property for Compression override. Valid parms : %IntBroker_Compress, %IntBroker_UnCompress, %IntBroker_Compress_Reset</pre>

Field or Control	Description
Log Detail	The Log Detail drop-down list box displays only for synchronous service operations. This option enables you to set the level of information logging for synchronous messages that is viewable in the Service Operations Monitor. The valid values are: • <i>Header.</i> Log header information only. With this option, you can view synchronous message header information in the Service Operations Monitor. • <i>Header and Detail.</i> Log header and message detail information. With this option, you can view synchronous message header information and XML message content on in the Service Operations Monitor. When you select this option for a consumer REST service operation routing, a Service Operation Security link appears and you can add permissions to the service operation. Doing so enables access to service operation details in the Service Operations Monitor. • <i>No Logging.</i> (Default.) Turn off all logging. No information is available to view in the Service Operations Monitor.
Service Operation Security	A Service Operation Security link appears when the selected routing definition is for an outbound REST-based service operation Click the link to access the Web Service Access page and to add permissions to the view details for the service operation in the Service Operations Monitor.
OnSend Handler	This field displays when an OnSend handler is defined for the service operation and the sending node is the local node. It also displays when the system is serving as a hub, and neither the sender nor receiver are local. Select a handler from the list. This handler runs when a message is sent or received to perform processing logic.
Schema Validation Details	This field displays only when working with any-to-local routing definitions. (Optional.) When this check box is selected and a schema validation error occurs the raw schema parser errors are returned to the consumer within the default message CDATA tag. If the check box is not selected (Default) then if a schema validation error occurs the systems uses the standard message set/ ID framework to generate the error.

Field or Control	Description
OnReceive Handler	This field displays when an OnReceive handler is defined for the service operation and one of the following conditions exists: • The sending node is the local node, or • The service operation type is asynchronous request/response where the sender is not local and the receiver is local, or. • The system is serving as a hub, and neither the sender (initiator) nor final receiver are local. Select a handler from the list. This handler runs when a message is sent or received to perform processing logic.
Use Secure Target Location	This check box appears only when you are working with an outbound asynchronous request/response service operation. Select the check box to use the secure target location as the endpoint for the response. If the check box is not selected, the (unsecured) target location is used.

Defining Routing Parameters

This section provides an overview of defining transformations for any-to-local routing definitions and discusses how to define general routing parameters.

Understanding Routing Parameters for Requests and Responses

A routing definition contains routing parameters for each inbound request, inbound response, outbound request and outbound response associated with a service operation. The routing parameters that you can define include for each request or response include, routing alias, message names before and after transformation, and transformation program names.

You define routing parameters using the Routings – Parameters page in the Routings component.

The following tables list the number of routing parameters a routing definition contains based on the service operation type and whether the sending and receiving nodes are local.

Note: Parameters for routing definitions for REST service operations are not included in the following tables, since they are system generated.

Asynchronous service operations have the following routing parameters:

<i>Service Operation Type</i>	<i>Sender is Local</i>	<i>Receiver is Local</i>	<i>Inbound Request Routing</i>	<i>Outbound Request Routing</i>	<i>Inbound Response Routing</i>	<i>Outbound Response Routing</i>
Asynchronous One- Way	Y	Y	N	Y	N	N
Asynchronous One- Way	Y	N	N	Y	N	N
Asynchronous One- Way	N	Y	Y	N	N	N
Asynchronous One- Way	N	N	Y	Y	N	N

Synchronous service operations have the following routing parameters:

<i>Service Operation Type</i>	<i>Sender is Local</i>	<i>Receiver is Local</i>	<i>Inbound Request Routing</i>	<i>Outbound Request Routing</i>	<i>Inbound Response Routing</i>	<i>Outbound Response Routing</i>
Synchronous	Y	Y	Y	Y	Y	Y
Synchronous	Y	N	N	Y	Y	N
Synchronous	N	Y	Y	N	N	Y
Synchronous	N	N	Y	Y	Y	Y

Asynchronous-to-synchronous service operations may have the following routing parameters:

<i>Service Operation Type</i>	<i>Sender is Local</i>	<i>Receiver is Local</i>	<i>Inbound Request Routing</i>	<i>Outbound Request Routing</i>	<i>Inbound Response Routing</i>	<i>Outbound Response Routing</i>
Asynchronous-to-synchronous	Y	Y	Y	N	N	Y
Asynchronous-to-synchronous	Y	N	N	Y	Y	N

Service Operation Type	Sender is Local	Receiver is Local	Inbound Request Routing	Outbound Request Routing	Inbound Response Routing	Outbound Response Routing
Asynchronous-to-synchronous	N	Y	Y	N	N	Y
Asynchronous-to-synchronous	N	N	Y	Y	Y	Y

Asynchronous request/response service operations may have the following routing parameters:

Service Operation Type	Sender is Local	Receiver is Local	Inbound Request Routing	Outbound Request Routing	Inbound Response Routing	Outbound Response Routing
Asynchronous Request / Response	Y	Y	N	Y	Y	N
Asynchronous Request / Response	Y	N	N	Y	Y	N
Asynchronous Request / Response	N	Y	Y	N	N	Y
Asynchronous Request / Response	N	N	Y	Y	Y	Y

Understanding Transformations on Any-to-Local Routing Definitions

If you define a transformation on an any-to-local routing definition, the system uses the input message.version on the transform for the inbound request for WSDL. If a transform is defined on the outbound response, then the system uses the message.version on the output of the transformation for WSDL.

In cases where the input message.version or output message.version are not defined on the transform, the system uses the request or response message.version defined on the service operation for WSDL.

Note that any-to-local routing definitions are read-only when WSDL has been exported. As a result, you cannot change the in/out message transformation, aliases, and so on.

Defining Routing Parameters for Requests and Responses

Use the Routings-Parameters page (IB_ROUTINGDEFNDOC) to view and define parameters for requests and responses associated with a service operation. Information you define includes, routing external aliases for inbound and outbound requests and responses, as well as any inbound or outbound transformations to invoke.

To access the Routings - Parameters page, select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Parameters** tab.

This example illustrates the fields and controls on the Routings – Parameters page. You can find definitions for the fields and controls later on this page.

Routing Definitions	Parameters	Connector Properties	Routing Properties
Routing Name GETSUBITEMS Service Operation GETSUBITEMS Service Operation Version V1 Sender Node  Receiver Node WSDL_NODE			
Parameters Type Inbound Response External Alias getSubItems.V1 Alias References Message.Ver into Transform 1  Transform Program 1  Transform Program 2  Message.Ver out of Transforms  Type Outbound Request External Alias getSubItems.V1 WS Security Alias References Message.Ver into Transform 1  Transform Program 1  Transform Program 2  Message.Ver out of Transforms 			

The following page elements display on the Routings-Parameters page:

Field or Control	Description
Type	Specifies the routing direction and the type of message (request or response) associated with the service operation. This information is automatically populated from the service operation definition.
External Alias	This alias is used as a SOAPAction attribute in the WSDL binding to identify the service operation in the Integration Broker metadata. The routing external alias defaults to <code><ServiceOperationAlias>.<Version></code>, if present. Otherwise it defaults to <code><ServiceOperation>.<Version></code>. In an asynchronous request/response any-to-local routing, the outbound routing alias format is <code><Alias Name>_CALLBACK.<Version></code>. For inbound transactions you can fire multiple service operations for one invocation when external aliases on the routing definition are the same for each service operation. This is called service operation mapping. See Service Operation Mapping. Duplicate external aliases are not allowed for synchronous operations. See Searching for Duplicate External Routing Aliases.
Alias References	Click the link to view other routing definitions with the same external alias. See Searching for Duplicate External Routing Aliases.

Field or Control	Description
WS Security	This link appears on the Parameters page when you are working with: - Non-REST service operations and are integrating with external nodes. Click the link to override WS Security settings configured at the node level for the outbound request or response. See “Overriding Node-Level WS-Security Settings on Routing Definitions” (Integration Broker Administration). - Outbound consumer REST service operations. Click the link to set the security level of the outbound request as required by the REST provider. See Securing Consumer REST Service Operations. - Synchronous provider web services where an inbound request is not digitally signed.
Message.Ver into Transform 1	Displays the name of the request or response message associated with the service operation before any transformations are applied. For inbound transactions, this is the message name and version as it arrives from the integration partner system, before any transformations are applied. For outbound transactions, this is the message name and version directly from the PeopleSoft system, before any transformations are applied.
Transform Program 1	(Optional.) Enter the name of the transform program to invoke on the message listed in the Message.Ver into Transform 1 field.
Transform Program 2	(Optional.) Enter the name of the transform program to invoke after the transform program in the Transform Program 1 field has completed processing. When you invoke two transform programs, the output from the first transform program (Transform Program 1) is used as the input into the second transform program (Transform Program 2).

Field or Control	Description
Message.Ver out of Transforms	(Optional.) Enter the name of the message after all transform program have completed processing. For inbound messages, this is the message name and version that the PeopleSoft system is expecting. For outbound messages, this is the message name and version that the integration partner system is expecting.

When the Routings-Parameters page first displays values for the **Message.Ver into Transform 1** and **Message.Ver out of Transforms** fields display values to assist you in choosing transform programs. After you save the page, values do not appear in these fields unless the transform programs have an input/output messages associated with them.

Note: Based on the transform selected, the message.version of the inbound request or response and the message.version of the outbound request or response that the system populated on the page can be different then those specified on the component. Should this occur a warning message displays and you can accept or reject the message.version information populated on the Routings - Parameters page. If you reject the message.version information populated on the page, you can modify the fields with the appropriate message.version information, or change the information that is specified on the component.

Digital Signing Option on Outbound Response

If an inbound request for a synchronous provider web service is not digitally signed, use the **Request Alias Name** option on the Routing Security page to digitally sign your outbound option.

To be able to digitally sign a response that does not have a digitally signed request, the Request Alias Name needs to be provided. The gateway uses the Request Alias Name to retrieve the appropriate digital certificate from the keystore.

Note: The customer can enable web services that require digitally signed responses. The customer must configure the integrationGateway.properties file to enable their own OAuth2 authentication.

This example illustrates the Routings Security page that appears when you select the WS Security link.



To digitally sign your outbound option:

1. Access the Routings-Parameters page (From **PeopleTools** > **Integration Broker** > **Integration Setup** > **Routing Definitions**, select the **Parameters** tab).

2. Select the **WS Security** link.

The Routing Security page appears.

3. Select the **Security Override** check box.

The **Request Alias Name** field appears.

4. Enter the Request Alias Name in the **Request Alias Name** field to digitally sign a response.

Defining and Overriding Gateway and Connector Properties

The Routings-Connector Properties page (IB_ROUTINGDEFCON) enables you to define and override the default integration gateway and target connector that the local node uses to communicate with an endpoint for a specific routing definition.

To access the Routings – Connector Properties page select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Routing Definitions** and click the **Connector Properties** tab.

Note: The Routings – Connector Properties page displays in the Routings component only if the receiving node is not the local node.

This example illustrates the fields and controls on the Routings – Connector Properties page. You can find definitions for the fields and controls later on this page.

Routing Definitions	Parameters	Connector Properties	Routing Properties
Routing Name GETSUBITEMS Service Operation GETSUBITEMS Service Operation Version V1 Gateway ID  Connector ID  *Delivery Mode Guaranteed Delivery 			

After you select an integration gateway and target connector with which to work, the system displays the required properties for the connector that you can set and override. To set or override additional properties add them to the properties list with the desired values.

This example illustrates the Routings – Connector Properties page. The example shows the properties for the HTTP target connector.

Routing Definitions	Parameters	Connector Properties	Routing Properties																				
Routing Name GETSUBITEMS Service Operation GETSUBITEMS Service Operation Version V1 Gateway ID LOCAL  Connector ID HTTPTARGET  *Delivery Mode Guaranteed Delivery 																							
Connector Properties     1-3 of 3   View All <table border="1"> <thead> <tr> <th>Property ID</th> <th>Property Name</th> <th>Value</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>HEADER </td> <td>sendUncompressed </td> <td>Y </td> <td>+</td> <td>-</td> </tr> <tr> <td>HTTPPROPERT </td> <td>Method </td> <td>POST </td> <td>+</td> <td>-</td> </tr> <tr> <td>PRIMARYURL </td> <td>URL </td> <td> </td> <td>+</td> <td>-</td> </tr> </tbody> </table>				Property ID	Property Name	Value			HEADER 	sendUncompressed 	Y 	+	-	HTTPPROPERT 	Method 	POST 	+	-	PRIMARYURL 	URL 		+	-
Property ID	Property Name	Value																					
HEADER 	sendUncompressed 	Y 	+	-																			
HTTPPROPERT 	Method 	POST 	+	-																			
PRIMARYURL 	URL 		+	-																			

The Routings-Connector Properties tab features the following controls:

Field or Control	Description
Gateway ID	Click the Lookup button to select an integration gateway.

Field or Control	Description
Connector ID	Click the Lookup button to select a target connector that resides on the gateway entered in the Gateway ID field. After you select a target connector, its required properties appear.
Delivery Mode	Select one of the following options: • <i>Guaranteed.</i> (Default.) • <i>Best Effort.</i> These options are discussed in detail elsewhere in the product documentation. See “Setting Target Connector Delivery Modes” (Integration Broker Administration).
Save	Click the Save button to save your changes.

Overriding Default Integration Gateways

To override the default integration gateway, use the **Gateway ID** field **Lookup** button to select a gateway. You must also select a target connector on the new gateway to use and define properties for that connector.

Overriding Default Target Connectors

To override the default target connector on the default integration gateway, use the **Gateway ID** field **Lookup** to select the default gateway. Use the **Gateway ID** field **Lookup** to select a different target connector that resides on the gateway and then define properties for the new connector.

For REST-based services the connector ID default to *HTTPTARGET* and cannot be changed.

Overriding Default Connector Properties

To override the default target properties for the default target connector, use the Gateway ID field Lookup button to select the default gateway. Use the **Connector ID** field **Lookup** to select the default target connector and then adjust the gateway properties as appropriate.

HTTP header properties, those with the property ID of *HEADER*, are the only properties you can add for routings for outbound REST-based service operations.

Defining Routing Properties

This section provides an overview of routing properties and discusses how to add them in the form of name/value pairs to routing definitions.

Understanding Routing Properties

Routing properties are user-defined name/value pairs that denote data contained in transformations defined for a routing definition.

Once they know the name/value pairs in a transformation, developers can extract the data from transformations using application classes. Developers might use the name/value pairs data to add to XML, perform SELECT actions in tables, and so on.

Defining Routing Property Name/Value Pairs

Use the Routings-Routing Properties page (IB_ROUTINGDEFNPROP) to add routing properties to a routing definition. To access the page select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Routing Properties** tab.

This example illustrates the Routing Properties page.

Routing Properties			
Type	Prop. Name	Value	Comment
1 Category			

To add routing property name/value pairs:

1. Access the Routings-Routing Properties page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions** and click the **Routing Properties** tab).
2. From the **Type** drop-down list box, select a property type. The options are:
 - *Category*.
 - *Ident*.
 - *Search*.
3. In the **Prop. Name** field, enter a name for the property.
4. (Optional.) In the **Value** field, enter a value for the property.
5. (Optional.) In the **Comment** field, enter a comment or description for the name/value pair.
6. Click the **Add a Row** button (+) to add additional rows and property name/value pairs.
7. Click the **Save** button.

Activating and Inactivating Routing Definitions

This section discusses how to:

- Use the Routings component to activate and inactivate routing definitions.
- Use the Service Operations component to activate and inactivate routing definitions.
- Use the Nodes component to activate and inactivate routing definitions.

Understanding Activating and Inactivating Routing Definitions

You can use the Routings component or the Service Operations component to activate and inactivate routing definitions.

Activating and Inactivating Routing Definitions in the Routing Component

You can use the Routings-Routing Definitions page to activate and inactivate a routing definition.

To activate or inactivate a routing definition:

1. Select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.

Select a routing definition with which to work.

2. Perform one of the following actions:
 - To activate the routing definition, select the **Active** check box.
 - To inactivate the routing definition, deselect the **Active** check box.
3. Click the **Save** button.

Activating and Inactivating Routing Definitions in the Service Operations Component

You can also activate and inactivate routing definitions in the Service Operations component using the Service Operations-Routings page.

See [Activating and Inactivating Routing Definitions](#).

Activating and Inactivating Routing Definitions in the Nodes Component

You can use the Nodes – Routings page to access a routing definition and to activate or inactivate a routing.

To activate or inactivate a routing definition from the Nodes component:

1. Select **PeopleTools > Integration Broker > Integration Setup > Node Definitions**.
2. Click the **Routings** tab.

3. Locate the routing definition to activate or inactivate and click the **Details** link.


The routing definition appears in the Routing Definitions page.


4. Perform one of the following actions:
 - To activate the routing definition, select the **Active** check box.
 - To inactivate the routing definition, deselect the **Active** check box.
5. Click the **Save** button.

Viewing Routing Definitions in Graphical Format

This section discusses common elements used to view routing definitions in graphical format. It also discusses how to view routing definitions in graphical format.

Common Elements Used to View Routing Definitions in Graphical Format

<i>Field or Control</i>	<i>Description</i>
	This symbol denotes an integration participant. Online and in color documents the light blue-colored symbol denotes the PeopleSoft system. A gray-colored symbol denotes the integration partner of the PeopleSoft system. The symbol shown here is light blue and denotes the PeopleSoft system.
	The left-facing arrow denotes an outbound flow of data from the PeopleSoft system.
	This symbol denotes a transformation. This can occur on the inbound or outbound side of the integration.
	This symbol denotes the outbound flow of data from the PeopleSoft system out of the integration gateway.
	This left-facing arrow denotes the inbound flow of data to the PeopleSoft system.


Field or Control	Description
	This symbol denotes the inbound flow of data into the integration gateway of the PeopleSoft system.
Alias	Name of the routing alias.
Default Message	Name of the default message as it leaves or enters the PeopleSoft system. For outbound messages, this is the message name <i>before</i> any transformations are applied. For inbound messages, this is the message name <i>after</i> any transformations are applied.
In Message	The inbound message name before any transformations have been applied.
In Resp Transform	Click the link to view information about transformations applied to the inbound response message.
Integration Not Active	This link displays when one or more of the following items are inactive for an integration: • Routing definition. • Service operation version. • Handler. • Service operation permissions. Click the link to view the inactive items. See Viewing Integration Status and Activating Integration Metadata.
Out Message	Name of the outbound message after any transformation have been applied.
Out Req Transform	Click the link to view information about transformations applied to the outbound request message.
Receiver	Name of the receiving node.
Return	Click the button to return to the previous page.

<i>Field or Control</i>	<i>Description</i>
Routing Name	Name of the routing definition.
Operation Type	The service operation type.
Sender	Name of the sending node.
Service Operation	Service operation name and version.
Type	Type of request on the PeopleSoft system. The possible values are: • <i>Outbound Request.</i> • <i>Inbound Request.</i> • <i>Inbound Response.</i> • <i>Outbound Response.</i>

Viewing a Routing Definition in Graphical Format

The Integration Broker Routing Graphic page (IB_IMAGETEST2) displays routing definition data in graphical format.

This example illustrates the Integration Broker Routing Graphic page. The example shows a synchronous routing definition, *QE_PO_SYNC*, in graphical format.

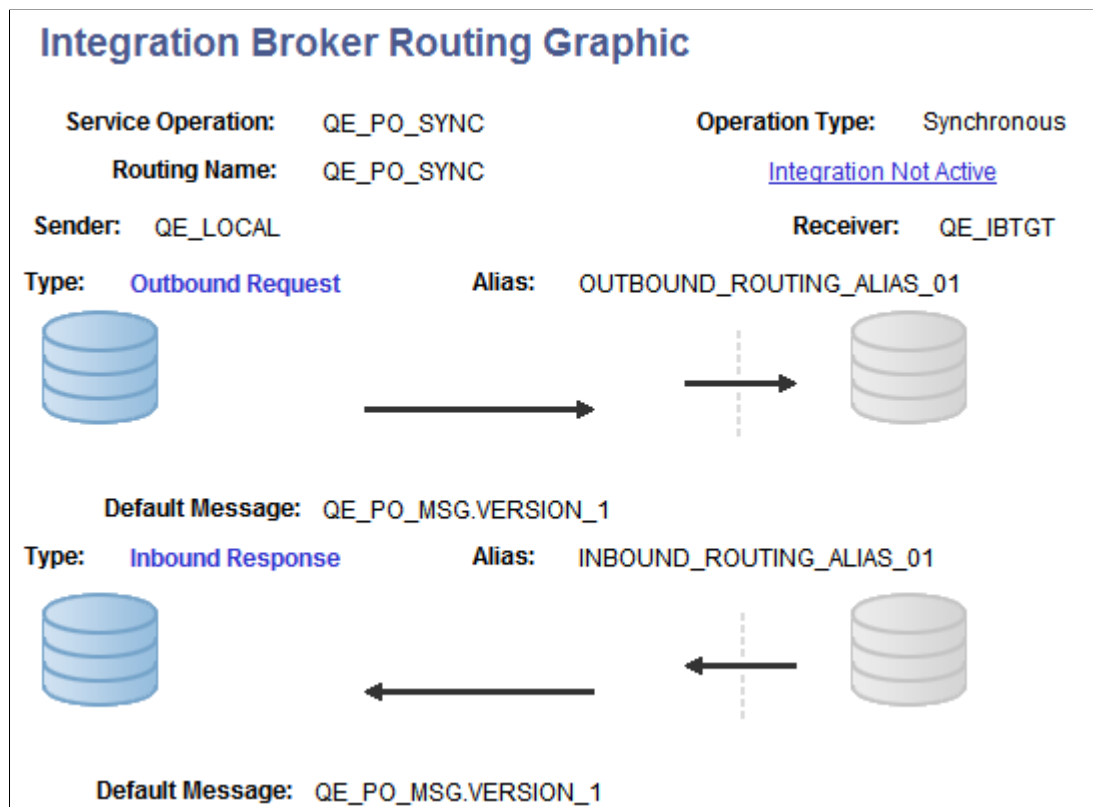

The example shows that the service operation *QE_PO_SYNC* is associated with the routing. It also shows that the routing type is *Synchronous*.

The sending node is *QE_LOCAL*, and the node is depicted graphically by the cylinders on the left side of the example. The receiving node is *QE_IBTGT* and is depicted graphically by the cylinders on the right side of the example.

The example shows the outbound request from the node *QE_LOCAL* to the node *QE_IBTGT* has a routing alias of *OUTBOUND_ROUTING_ALIAS.V1*. It also shows that the outbound default message associated with the routing is *QE_PO_MSG.VERSION_1*.

When the node *QE_IBTGT* sends back its response, it has a routing alias of *INBOUND_ROUTING_ALIAS.V1* and the message associated with the response is *QE_PO_MSG.VERSION_1*.

The dotted line depicts the integration gateway, and depending on the arrow direction shows the service operation leaving or entering the gateway.

Note in the example that an **Integration Not Active** link displays at the top right of the page. This indicates that one or more pieces of metadata associated with the integration is not active. Click the link to view and activate the data.

Related Links

[Viewing Integration Status and Activating Integration Metadata](#)

Viewing Integration Status and Activating Integration Metadata

This section discusses how to:

- View inactive integration metadata.
- Activate integration metadata using the Integration Status page.

Understanding Viewing Integration Status and Activating Integration Metadata

When you view a routing definition in graphical format, if any metadata associated with the integration is inactive, an **Integration Not Active** link displays on the Integration Broker Routing Graphic page. You can click the link to open an Integration Status page, where you can view the inactive metadata and activate the data.

Note: The **Integration Not Active** link displays only when an integrations contains metadata that is not set to *Active*.

Viewing Inactive Integration Metadata

Use the Integration Status page (IB_IMAGETEST_SEC) to view inactive metadata for an integration. To access the Integration Status page, from the Integration Broker Routing Graphic page, click the **Integration Not Active** link.

This example illustrates the Integration Status page.



The screenshot shows the 'Integration Status' page. It features a table titled 'Issues Encountered' with two columns: 'Problem' and 'Actions'. The table lists two inactive metadata items: 'Service Operation Inactive' and 'Handler Inactive - OnRequestSend'. For each item, there is a corresponding link in the 'Actions' column to activate it.

Issues Encountered	
Problem	Actions
Service Operation Inactive	Activate Operation Version
Handler Inactive - OnRequestSend	Activate Handler

The Issues Encountered section lists the metadata that is inactive and that you must activate before you can invoke the service operation.


The links in the Actions column enable you to activate the associated metadata directly from this page.

See [Activating Integration Metadata Using the Integration Status Page](#).

Activating Integration Metadata Using the Integration Status Page

The system activates the associated metadata and displays a message when the data is successfully activated.

This example shows a Message box that indicates a service operation version was successfully activated.

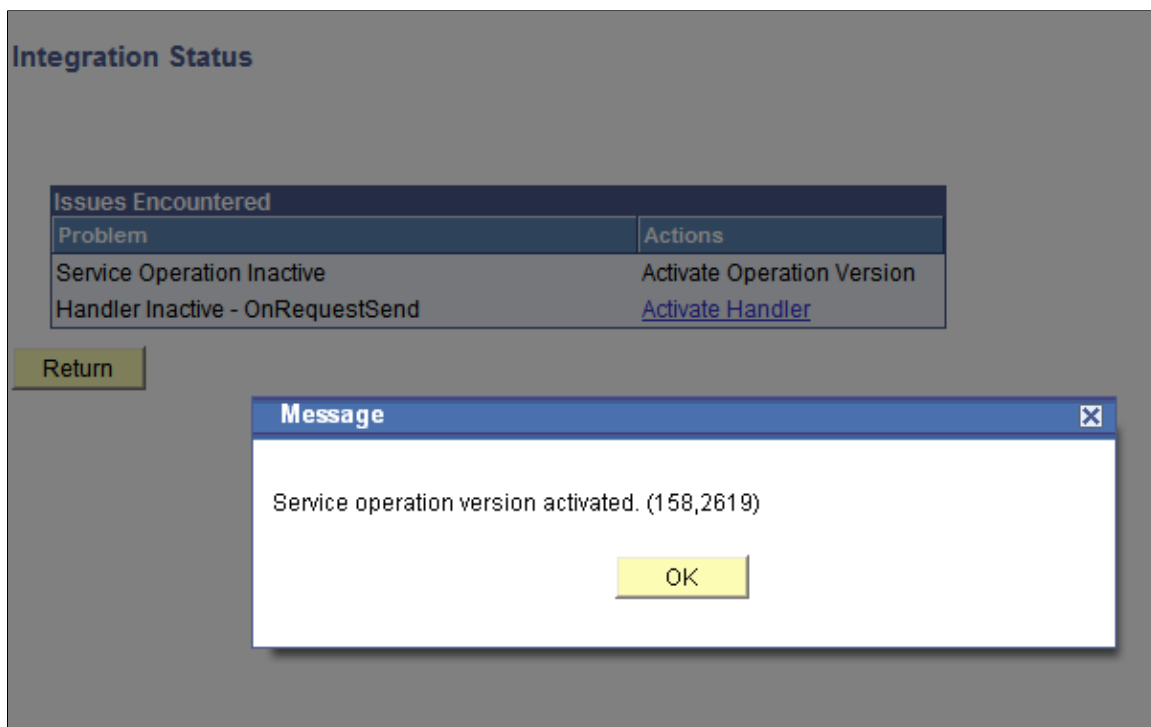

To activate metadata for an integration using the Integration Status page:

1. From the Integration Broker Routing Graphic page, click the **Integration Not Active** link.
The Integration Status page appears.
2. In the Actions column, click an action to complete.
The system processes the action and displays a message that the metadata is activated.
3. Click the **OK** button.
4. Repeat the steps to activate additional metadata.
5. Click the **Return** button to go back to the Integration Broker Routing Graphic page.

Retrieving Routing Properties Programmatically

The `%TransformData.routingDefnName` property enables you to retrieve the routing definition name for a transaction, and allows you to retrieve the routing properties respectfully.

You use this property in a PeopleSoft Application Engine program as follows:

```
string rtgDefnName = %TransformData.routingDefnName
```

Configuring Routing Definitions for Deployment

This topic discusses how to:

- Use the Deployment Configuration page.
- Use the Deployment Configuration grids.
- Use the Get Routing Information page.
- Select routing definitions for routing deployment configurations.
- Populate deployment configurations from routing definitions.
- Add routing definitions for deployment.
- Update release levels.

Understanding Configuring Routing Definitions for Deployment

Many PeopleSoft applications deliver integrations. The routing definitions on these integrations are frequently delivered inactive, because:

- The node names defined in the delivered routing definitions do not match the names integration partners have assigned to the source and target systems.
- The information on the routing is not applicable to the application version for the integration.

PeopleTools enables you to store specific routing information in a deployment table in the database for integrations among PeopleSoft applications, thereby allowing routing definitions to be excluded from deployment metadata.

Understanding Using Routing Deployment Configuration

Prior to a new application release or patch create an integration group or subgroup. For any new or modified integrations, add the services and service operations to the newly defined integration group or subgroup.

After quality assurance testing with other PeopleSoft integration partners, and prior to creating the final project, examine the new or modified integrations and determine if you need to add any routing definitions. If so, use the Deployment Configuration page in the Service Utilities component to add the routing definitions. The routing metadata gets saved as part of the service operation version.

Note: The routing information you define using the routing deployment configuration pages is saved as part of the service operation version.

The associated physical routing(s) defined in the Routings component can then be deleted.

Integration partners then upload the project and use the Integration Network Introspection and Deployment feature to introspect and deploy the integrations to all PeopleSoft integration partners using the integration group name you created earlier.

When introspection takes place the receiving system is interrogated to get the application version information. The information is used to determine the PeopleSoft application (for example, HCM, SCM, and so on) for look up against the deployment configuration metadata to determine an integration match.

Note: You need to add routing information to the deployment table using the Deployment Configuration page only if specific routing data needs to be part of an auto-generated routing, such as transformation information, alias name (if different from the default), and so on. Therefore, not all PeopleSoft-to-PeopleSoft routing definitions need to be added to the deployment table using the Deployment Configuration page.

Routing deployment configuration metadata is only applicable for a defined PeopleSoft application. This means that the source system where introspection is invoked can have deployment configuration information, while the receiving system does not have deployment configuration information. As a result, you only need to update the deployment data for your own application.

The introspection process uses the following order to determine proper integration bindings:

1. Valid routing. The sending and receiving nodes match, the alias name matches.
2. Deployment configuration metadata (as defined in the Deployment Configuration page). Routing name matches.
3. Service operation and version match.

During introspection processing, the system examines the deployment configuration metadata and can determine the proper routing (if one is available) based on the PeopleSoft application name and application version.

Using the Deployment Configuration Page

Use the Deployment Configuration pages (IB_INTDEPLOY) to select services for routing deployment configuration and to define routing parameters.

To access the Deployment and Configuration pages select PeopleTools, Integration Broker, Service Utilities, Deployment Configuration.

This example illustrates the fields and controls on the Deployment Configuration page. You can find definitions for the fields and controls later on this page.

Deployment Configuration

Level

☒ Integration Group

Integration Group Name

☒ Show All Subgroups

☐ Filter by Subgroup

☐ No Subgroups

☒ Show Services tied to Group

☐ Service

Service

☐ Operation

Operation

Select Items to Process Personalize | Find | View All | First | 1 of 1 | Last

Select	Service	Service Operation	Integration Group Name
☐			

☒ [Select All](#) ☐ [Deselect All](#)

The following fields and controls appear on the page:

Field or Control	Description
Integration Group	Select the radio button to search for service operations by integration group. Use one of the following integration group filters: • Show All Subgroups. (Default.) Select the radio button to display all integration subgroups associated with integration groups in the system. • Filter by Subgroup. Select the radio button to search for a specific integration subgroup and enter its name in the field. • No Subgroups. Select the radio button to omit integration subgroups from your search. • Show Services Tied to Group. Check the box to include the services tied to an integration group in the search results. By default this option is selected. • Show Services Tied to Group. (Default.) Check the box to include the services tied to an integration group in the search results.
Integration Group Name	If searching by integration group, enter the integration group name to search, or click the Lookup button to search for one.

Field or Control	Description
Service	Select the radio button to search for service operations by service. When you select this option a Lookup button appears next to the Service field.
Service Operation	Select the radio button to search for service operations by service operation. When you select this option a Lookup button appears next to the Operation field. Click the Lookup button to search for a service operation to introspect and deploy or enter the name directly in the field.
Search	Click the button to search the database for service operations based on the search criteria entered.
Select Items to Process (grid)	This grid displays the search results and contains the following fields and controls: • Select. Select the box to configure routing definitions for the service, service operation or integration group. • Service. Name of service. • Service Operation. Name of service operation. • Integration Group Name. Name of integration group.
Select All	Select the box to select configure routing definitions for all items in the Select Items to Process grid.
Deselect All	Select the box to clear all selections in the Select Items to Process grid.
Continue	Click the button to define routing parameters for selected items in the Select Items to Process grid.

Using the Routing Deployment Grids

To define routing parameters for selected services, service operations or integrations groups, use the Deployment Configuration grid (IB_INTDEPLOY2).

To access the grid click the Continue button after you search for and select integrations for which to configure routings. This example illustrates the Deployment Configuration grid used to define routing parameters. You can find definitions for the fields and controls later on this page.

This example illustrates the fields and controls on the Deployment Configuration grid. You can find definitions for the fields and controls later on this page.

If on the Deployment Configuration page you select a service or integration group, separate grids appear on the page for each service operation in the service or integration group

This example illustrates the fields and controls on the Deployment Configuration grids. You can find definitions for the fields and controls later on this page.

You can create routing definitions for each application or patch release, or populate the grid with data from the existing routing definition in the database.

To configure a different routing definition for another release, click the **Add Row** button (+) to create a new row, configure another definition.

You can manually create and configure routing definitions to deploy by entering and selecting fields on the page. You can also populate a definition using the existing routing definition data defined in the Routings component using the **Get Routing Information** link. When you click the link the existing routing definition for the service operation appears and you can choose to populate the page with that data. Information on using the **Get Routing Information** link appears later in this topic.

The following fields and controls appear on the page:

Field or Control	Description
Save	When you have completed configuring routing definitions on the page, click the button to save the changes. The main Deployment Configuration page appears after the save action.
Service Operation	Name of the service operation for which you are configuring routing definitions.
Version	Version of the service operation for which you are configuring routing definitions.
Request (tab)	This tab features routing parameters that you configure for the request transaction. The parameters that appear in this grid are described later on this page.
Response (tab)	This tab features routing parameters that you configure for the response transaction. The parameters that appear in this grid are described later on this page.
Handler (tab)	This tab features handler parameters that you can configure for the service operation. The parameters that appear in this grid are described later on this page.
Get Routing Information	Click the link to view existing routing parameters defined for the service operation and to access the routing definition.

The previous example shows the default view of the page. The Request tab appears in the Definitions section. Use this tab to configure routing parameters for the request transaction. Use the Response tab in the Definitions section to configure routing parameters for the response transaction.

This example illustrates the fields and controls on the Deployment Configuration grid – Response tab. You can find definitions for the fields and controls later on this page.

The following fields and controls appear on the Request tab and on the Response tab of the Deployment Configuration grid:

Field or Control	Description
Release Label	Select the PeopleSoft application and release or patch number from the drop-down list.
Direction	From the drop-down list, select the direction of the transaction. The options are: • <i>Inbound</i>. Inbound request • <i>Outbound</i>. Outbound request
External Alias	Enter the external alias name.
In Message Name	Enter the name of the inbound message.
In Message Version	Enter the version of the inbound message.
Transform Program 1	Enter the name of transform program number one.
Transform Program 2	Enter the name of transform program number two.
Out Message Name	Enter the name of the outbound message.
Out Message Version	Enter the version of the outbound message.
User Exception	Check the box to enable user exception handling using PeopleCode. This control appears on the Request grid only and is applicable to synchronous service operation processing only. When enabled and an error occurs you can handle any errors in the calling PeopleCode. If not enabled any errors that occur cause the program to stop.

Use the Handlers tab to configure and populate handler metadata for the service operation.

This example illustrates the fields and controls on the Deployment Configuration grid – Handler tab. You can find definitions for the fields and controls later on this page.

The following fields and controls appear on the Handlers tab of the Deployment Configuration grid:

Field or Control	Description
Direction	From the drop-down list, select the direction of the transaction. The options are: <i>Inbound.</i> Inbound request <i>Outbound.</i> Outbound request
OnPreNotify Handler	Enter the name of the OnPreNotify service operation handler to perform pre-processing on segmented messages. This option is relevant only when using the unordered segments option to process service operation messages in parallel.
OnPostNotify Handler	Enter the name of the OnPostNotify service operation handler to perform post-processing on segmented messages being processed in parallel. This option is relevant only when using the unordered segments option to process service operation messages in parallel.
OnReceive Handler	Enter the name of the OnReceive service operation handler to perform processing logic: To use this handler for deployment one of the following conditions must exist: - The sending node must be the local node, or - The service operation type must be asynchronous request/response where the sender is not local and the receiver is local, or - The system is serving as a hub, and neither the sender (initiator) nor final receiver are local.

Field or Control	Description
OnSend Handler	Enter the name of the OnSend service operation handler to perform processing logic. To use this handler for deployment configuration: - The sending node must be the local node, or - The system is serving as a hub, and neither the sender nor receiver are local.
Unorder Segments	Check the box to indicate that the system should process service operation messages in parallel. To use this option the local node must be the receiving node. This option is frequently used in conjunction with the OnPreNotify handler and OnPostNotify handler to perform pre- or post-processing on segmented messages

Using the Get Routing Information Page

Use the Get Routing Information page (IB_INTDEPLOY_SEC) to view the existing routing definition for a service operation and to add the data to the deployment configuration table.

To access the page, on the Deployment Configuration grid page, click the **Get Routing Information** link.

This example illustrates the fields and controls on the Get Routing Information page. You can find definitions for the fields and controls later on this page.

Get Routing Information

Service Operation IB_EX_MP_NONROWSET_ASYNC

Version v1

Routings				
Select	Routing Name	Sender Node Name	Receiver Node Name	
☐	ROUTINGS03	QE_LOCAL	QE_CRM	Get Routing Definition

OK Cancel

The following fields and controls appear on the page:

Field or Control	Description
Service Operation	Service operation name.
Version	Service operation version.

Field or Control	Description
Select	Select the box to populate the routing deployment table with the routing definition in the database.
Routing Name	Routing name.
Sender Node Name	Name of the sending node.
Receiver Node Name	Name of the receiving node.
Get Routing Definition	Click the link to access the Routings component to view the existing routing definition for the service operation. Click the Return button from the component to return to the Get Routing Information page.
OK	Click the button after you select the Select box to populate the routing deployment table with the routing definition in the database.
Cancel	Click the button to exit the page without populating the routing deployment database with the data from the existing routing definition.

Selecting Routing Definitions for Routing Deployment Configuration

To select service operations for routing deployment configuration:

1. Access the Deployment Configuration page (select **PeopleTools** > **Integration Broker** > **Service Utilities** > **Deployment Configuration**).
2. In the Level section of the page, select the options and enter the criteria to use to search the database for service operations. The fields and controls of the page are described previously in this topic.
3. Click the **Search** button.

The search results appear in the Select Items to Process grid.

4. Select the box next to each service operation, service, or integration group for which to configure routings for deployment.
5. Click the Continue button.

Deployment Configuration grids appear and you can configure or add routings for deployment.

Populating Deployment Configurations from Routing Definitions

You can populate the grids on the Deployment Configuration page with data from existing routing definitions.

To populate deployment configurations from routing definitions:

1. Access the Deployment Configuration grid (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Deployment Configuration**. Select the service operation(s) with which to work and click the **Continue** button).
2. Select the Request tab or the Response tab, depending on the transaction for which you are configuring the routing.
3. From the **Release Level** drop-down list, select an application or patch version from the list.

The value you select should be the application/patch version that the remote node on the routing is running.

4. Click the Get Routing Information link.

The Get Routing Information page appears.

5. (Optional.) Click the **Get Routing Definition** link to view the routing definition associated with the service operation in the Routings component. Click the **Return** button to return to the Get Routing Information page.
6. Select the **Select** box.
7. Click the **OK** button.

The Deployment Configuration (grids) page appears and the routing data from the routing definition appears in the Request or Response grid.

8. (Optional.) Click the **Add Row** button (+) to add a row and configure another routing for another application or patch version and repeat steps 2 through 6.
9. Click the **Save** button.

Adding Routing Definitions for Deployment

Add routing definitions for deployment using the Deployment Configuration (grids) page.

To add routing definitions:

1. Access the Deployment Configuration (grids) page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Deployment Configuration**. Select the service operation(s) with which to work and click the **Continue** button).
2. Select the Request tab or the Response tab, depending on the transaction for which you are configuring the routing.
3. From the **Release Level** drop-down list, select an application or patch version from the list.

The value you select should be the application/patch version that the remote node on the routing is running.

4. Use the fields and controls on the tab to configure the routing. The fields and control that appear on the Request and Response tabs are described earlier in this topic.

- Click the **Save** button.

Updating Release Levels

As new application versions and patches are released add the appropriate application versions and patches to the PS_IB_REL_LOOKUP table so that they are available for selection for this feature.

Searching for Duplicate External Routing Aliases

The Alias Name Reference page (IB_ALIAXREF_SEC) displays duplicate external routing aliases that exist for a routing definition.

To access the Alias Name Reference page, select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**. Click the **Parameters** tab and click the **Alias Reference** link for a request or response.

This example illustrates the Alias Name Reference page. The example shows that the external routing alias *QE_PO_SYNC.V1* is used for the current routing definition, **QE_PO_SYNC**, and for the routing definition *QE_PO_ASYNCCTOSYNCHALIAS*.

Alias Name Reference

Service Operation: QE_PO_SYNC
Version: V1
Routing Name: QE_PO_SYNC
Alias: QE_PO_SYNC.V1

Other routings with a matching alias.

Routings		
Service Operation	Service Operation Version	Routing Name
QE_PO_ASYNCCTOSYNCHALIAS	V1	QE_PO_ASYNCCTOSYNCHALIAS

Note:
Duplicate aliases result in a runtime error.

The Alias Name Reference page appears only if the system finds that the external alias on the current definition also exists on one or more other routing definitions. If the system finds that the external alias is not used on any other routing definitions, it displays a message indicating so.

Note: The Alias Name Reference page appears only if a duplicate external alias exists on another routing definition.

Duplicate external routing alias names are never allowed for synchronous routing definitions and the system generates an error at runtime if it encounters any.

In most cases duplicate external routing alias names are not desired for asynchronous routing definitions. The exception is when you are using service operation mapping, and you want one routing definition to invoke multiple service operations.

To remedy the problem of duplicate external routing alias names, create unique alias names for each duplicate found.

To search for duplicate external routing alias names:

1. Select **PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.

The Routings Definition page appears.

2. Click the **Parameters** tab.

The Parameters page appears.

3. Locate the request or response for which to check for duplicate external routing alias names.

Click the **Alias Reference** link.

If duplicate external routing alias names are found, the Alias Name Reference page appears and lists the routing definitions with which any duplicate aliases are associated. Otherwise, the system displays a message indicating that no duplicate aliases exist in the system.

Renaming and Deleting Routing Definitions

You can rename and delete routing definitions using the Routings page (IB_HOME_PAGE_4) in the Service Administration component (IB_HOME_PAGE).

The Routings tab contains three sections: a Delete section that enables you to delete routing definition, a Rename section that enables you to rename routing definitions, and a Delete Duplicate Routings section that enables you to view and delete duplicate routing definitions.

When you first access the Routings tab, the sections are collapsed. Click the section header arrow buttons to expand and collapse each section.

This example shows the Service Administration – Routings page. The example shows the page with both the Delete and Rename sections expanded.

The screenshot displays the 'Routings' tab in the Service Administration interface. At the top, a navigation bar includes tabs for WSDL, Services, Service Operations, Messages, Message Schemas, Queues, and Routings. Below the navigation bar, the 'Service System Status' is set to 'Development'.

The 'Delete' section is expanded, showing a 'Routing Name' input field, a 'Search' button, and a table of 'Routing Definitions'. The table has columns for 'Select', 'Routing Name', and 'Results'. A single row is visible with a checkbox in the 'Select' column. Below the table is a 'Delete' button.

The 'Rename' section is also expanded, showing 'Routing Name' and 'New Name' input fields, a 'Rename' button, and a 'Results' label.

At the bottom of the page, there is a button labeled 'Delete Duplicate Routings'.

The service system status that you set on the Service Configuration page affects the ability to rename services.

This section discusses renaming and deleting routings. See the following section for information about deleting duplicate routings.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration), “Using the Service Configuration Page to Set Service Configuration Properties” (Integration Broker Administration), [Deleting Duplicate Routing Definitions](#).

Renaming Routing Definitions

To rename a routing definition:

1. Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin.** Click the **Routings** tab.

The Routing page appears.

2. Click the arrow next to the Rename section header to expand the section.
3. In the **Routing Name** field, enter the routing definition to rename, or click the **Lookup** button to search for and select one.

4. In the **New Name** field, enter the new name for the routing definition.
5. Click the **Rename** button.

After you click the **Rename** button, the **Results** field displays a message that the action was successful or displays a warning or error message with a description of the problem.

Deleting Routing Definitions

To delete a routing definition:

1. Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin.** Click the **Routings** tab.

The Routing page appears.

2. Click the arrow next to the Delete section header to expand the section.
3. In the **Routing Name** field, enter the name of the routing definition to delete, and click the **Search** button.

Search results display in the Routings grid.

4. Select the check box next to the routing definition or routing definitions to delete.
5. Click the **Delete** button.

Deleting Duplicate Routing Definitions

Application upgrades and the PeopleSoft Application Designer project copy process can cause duplicate routings in the PeopleSoft system.

The Service Administration - Routings page (IB_HOME_PAGE_4) features a Delete Duplicate Routings section that enables you to search for duplicate routings in the system and delete them. When you first access the page, all sections on the page are collapsed. Click the arrow next to the Delete Duplicate Routings section title to expand the section.

This example illustrates the Service Administration – Routings page. The example shows the Delete Duplicate Routings section expanded.

The screenshot shows the 'Routings' tab selected in the top navigation bar. Below the navigation bar, the 'Service System Status' is set to 'Development'. There are buttons for 'Delete' and 'Rename'. The 'Delete Duplicate Routings' section is expanded, showing a 'Search' button and a table of 'Routing Definitions'. The table has columns: Select, Operation, Version, Type, Sender Node, Receiver Node, and Results. A 'Delete' button is located below the table.

Select	Operation	Version	Type	Sender Node	Receiver Node	Results
☐						

The page displays active duplicate routings only.

To delete duplicate routings:

1. Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin**. Click the **Routings** tab.

The Routings page appears.

2. Click the arrow next to the Delete Duplicate Routings section title to expand the section.
3. Click the **Search** button to search the system for duplicate routing definitions.

Duplicate routing definitions populate the Routing Definitions grid and all duplicates are selected for deletion.

4. Deselect the **Select** check box for any routing definitions you do not want to delete.
5. Click the **Delete** button.

The Routing Definitions grid displays up to 100 routing definitions at a time. The maximum number of rows returned at a time is 1000. Use the arrow buttons to move from page to page through the search results. If the maximum number of rows is reached, an information message appears that indicates the maximum has been reached. After you delete the routing definitions, click the **Search** button again to return more rows.

Applying Filtering, Transformation and Translation

Understanding Filtering, Transformation, and Translation

This topic describes how to use filtering, transformations and translations for integrations. This topic also features code examples to help illustrate how to filter, transform and translate integrations.

Note: The code examples in this topic are for illustrative purposes only and are not intended to be used in a production environment.

Filtering, transformation, and translation are all accomplished by applying an Application Engine *transform program* to an outbound or inbound message. You can use these programs to:

- *Filter* a message based on its content, to determine whether to pass it through to its destination or to subsequent steps of the transform program.
- Perform *transformation* on a message to make its structure comply with the receiving system's requirements.
- Perform *data translation* on a message so that its data is represented according to the receiving system's conventions.

Simple translation might be required if the two systems use different values to represent the same information for a given field.

Complex translation might involve augmenting or replacing groups of fields with a completely different structure and encoding.

If your PeopleSoft application uses the PeopleCode XmlDoc or SoapDoc classes to generate or process a message, the message probably doesn't adhere to the PeopleSoft rowset-based message format.

Filtering, transformation, or translation can be necessary for messages sent between two PeopleSoft Integration Broker nodes, or between a PeopleSoft Integration Broker node and a third-party application.

Related Links

[Supported Message Structures](#)

Understanding Transform Programs

This section provides overview information about transform programs.

Transform Programs

A transform program is a type of PeopleSoft Application Engine program. After you create a new transform application engine program, you add steps and actions to the program, and then add code to the steps and actions that performs data transformation, filtering or translation.

To develop a transform program, you must know the initial structure and possibly the content of the message with which you are working, as well as the structure (and content) of the result you want to achieve. Make sure that all participating nodes agree on a format or employ transformations to accommodate the variations from node to node.

The message data is made available to your transform program in a PeopleCode system variable after being extracted from the wrapper in which it was transmitted. The format of this wrapper depends on the transmission method, but is irrelevant to the transform program.

Any participating node with PeopleSoft Integration Broker installed — the source, the target, or a hub — can apply a transform program to a given message.

You specify which transform program to apply within a routing definition for a service operation.

Note: With PeopleSoft Integration Broker, the term *node* refers to a system or application participating in an integration, but in this topic a *node* is also a structural element in an XML document. The context in which the term is used should make its meaning clear.

Transform programs cannot modify the following messaging features:

- Transmission protocols.

You handle a given protocol by selecting an appropriate target connector for the target node's local gateway, or by directing a third-party sender to the appropriate listening connector on the default local node's local gateway. You can select from the delivered connectors or develop new ones.

- Character set encoding.

This is handled by the PeopleSoft globalization system.

Use a transformation when one node sends a request or response message with a data structure different from the structure required by the other node. One or both of the participating nodes can be PeopleSoft applications. At either end of the transaction, any of the following structure types may be required:

- The PeopleSoft rowset-based message format.
- An XML DOM-compliant non-rowset-based structure. This is generic XML data.
- A SOAP-compliant XML structure. This is also XML DOM-compliant.
- A non-XML structure. Third-party applications are more likely than PeopleSoft applications to require this type.

Your transformation can be between different structure types or between different structures of the same type.

Transformation Programming Languages

You can use PeopleCode or Extensible Stylesheet Language Transformation (XSLT) as programming languages for creating transformation logic.

XSLT is a well-recognized standard language perfectly suited to manipulating XML structures, so it's highly recommended for transformations. Because of its straightforward template-based approach to accessing the codeset repository, XSLT is also recommended for data translation.

Note: When programming using XSLT, you can hand-code the XSLT or use the Oracle XSL Mapper to graphically associate records and fields. The Oracle XSL Mapper then automatically generates the XSLT code.

However, you cannot use XSLT to filter messages based on content, so filtering must be implemented in PeopleCode.

Note: Filtering must be implemented using PeopleCode

You can use both XSLT and PeopleCode steps in a single transform program.

Each XSLT program must be enclosed in the following wrapper:

Note: When using Oracle XSL Mapper, the mapper automatically encloses the program in this wrapper.

```
<?xml version="1.0"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="1.0">
  your_xslt_program
</xsl:stylesheet>
```

Third-party XSLT development tools may generate a wrapper that specifies a different URI. Make sure the URI in your program is exactly as shown here, or your program may not work as expected.

You can find more information about XSLT at the World Wide Web Consortium (W3C) web site.

Third-Party Considerations

When no transformation is applied, applications using PeopleSoft Integration Broker send, and expect to receive, messages containing data that conforms to a minimum XML message structure: the PeopleSoft rowset-based message format.

When exchanging messages with third-party applications, you can:

- Employ a transformation at the PeopleSoft end of each transaction to convert messages to or from the PeopleSoft rowset-based message format.
- Require third-party applications to send and receive messages that comply with the PeopleSoft rowset-based message format. Third-party applications must comply with the rowset-based message format if *both* of the following are true:
 - Your PeopleSoft application uses the PeopleCode Message and Rowset classes to generate and send, or receive and process messages with Integration Broker.

- You don't want to employ PeopleSoft Integration Broker transformations to accommodate the third-party application.

Note: Third parties can submit messages to PeopleSoft Integration Broker systems using any listening connector registered with the local gateway. Regardless of the message data format, the third-party system is responsible for properly constructing the wrapper that contains the message data, and using the appropriate tools and protocols to address the connector.

Defining Transform Programs

This section discusses how to define transform programs.

Understanding Defining Transform Programs

This section contains information about defining transform programs

Transform Program Type

To create a transform program, in the Program Properties dialog box for the application engine program you must specify that the program type is *Transform Only*. After you select this option, input message name, output message name, input root element and output root element fields display.

Input and Output Message Names

When developing a transformation program, PeopleSoft Integration Broker enables you to specify the schema of the message that is going into the transform (input message and version), as well as the schema of the message that is the output of the program (output message and version).

Note: You must specify this information when using the Oracle XSL Mapper to develop transformation programs.

These fields are required when developing transformations using the Oracle XSL Mapper.

In all other cases, these fields are optional, since there may be occasions where a transformation is general in nature and used by many messages. For example, it might be a transform that changes certain fields regardless of the message shape. In cases such as these, you would not want to define a specific input or output shape, since the transform program is only changing fields.

Input and Output Root Elements

When working with nonrowset-based messages, there may be situations where the schemas for input and output messages have multiple root elements. However, Oracle XSL Mapper uses only one of the root elements on the input side as well as only one on the output side.

When using Oracle XSL Mapper to build XSLT transformations, you may specify the input and output root elements in the Program Properties dialog box. If you do not specify an input or output root element, Oracle XSL Mapper uses the first root element in the schema.

Defining a Transform Program

To define a transform program, create a new application engine object in PeopleSoft Application Designer. Then in the Program Properties dialog box you specify the program type as a transform program.

This example illustrates the Program Properties – Advanced page for an application engine program.

The screenshot shows the 'Program Properties' dialog box with the 'Advanced' tab selected. The 'Program Type' dropdown is set to 'Transform Only'. Other fields like 'Input Message Name', 'Output Message Name', etc., are empty.

In the previous example, note that the **Program Type** field displays *Transform Only*.

To define a transform program:

1. In PeopleSoft Application Designer, select **File > New > App Engine Program** and click the **OK** button.

A new application engine program window appears.

2. On the toolbar, click the *Properties* button.

The Program Properties dialog box appears.

3. Click the **Advanced** tab.
4. From the **Program Type** drop-down list box, select *Transform Only*.

Additional fields relating to input messages, output messages and root elements appear.

5. Select an input message and version:
 - a. From the **Input Message Name** drop-down list box, select the name of the message before transformation is applied.
 - b. From the **Input Message Version** drop-down list box, select the version of the input message.
6. In the **Input Root Element** field, enter the name of the input schema root element to use.

Enter a value in this field if the input message has multiple root elements. If the input message has multiple root elements and you do not enter an input root element, the first root element in the message is used for transformation.

This field is disabled when the input message is a rowset-based message.
7. Select an output message and version.
 - a. From the **Output Message Name** drop-down list box, select the name of the message after transformation is applied.
 - b. From the **Output Message Version** drop-down list box, select the version of the output message.
8. In the **Output Root Element** field, enter the name of the output schema root element to use.

This field is disabled when working with rowset-based messages.
9. Click the **OK** button.
10. The Program Properties dialog box closes.
11. Select **File > Save**.

Developing Transform Programs Using PeopleSoft Application Engine

This section discusses how to:

- Insert steps and actions into transform programs.
- Work with transform programs.
- Access message data.
- Make working data available globally.
- Preserve record and field aliases.

Understanding Developing Transform Programs Using PeopleSoft Application Engine

Following are some points to keep in mind when working with transform programs:

- Each transform program step operates on the message content that results from the previous step, so you can break your transform program into a sequence of discrete steps.
- Multiple transform actions within a step can produce unwanted effects, so insert each XSLT or PeopleCode action in its own step.
- XSLT works only on XML DOM-compliant data, so PeopleSoft Integration Broker assures that both outbound and inbound messages are in XML DOM-compliant form when transform programs are applied to them.
- XSLT is not supported by PeopleSoft on the OS/390 or z/OS operating systems. Transformations must use PeopleCode on these platforms.

A transformation can modify an entire message until it no longer resembles the original. So can a data translation. In a transformation, you must hard-code what you want to accomplish, whereas the data translation relies on a repository of *codeset metadata* that you define. This means you can establish consistent rule-based translations and reuse the same translation rules without having to reenter them.

Although you can combine transformation and data translation in a single transform step, it's better to keep these processes in separate steps and produce a modular program that you can more easily maintain, with code you can reuse in other transform programs.

Inserting Steps and Actions into Transform Programs

This section describes how to insert steps and actions into transform programs.

Understanding Inserting Steps and Actions

After you define a transform program, you insert steps and actions as you would with any other application engine program to construct the transformation program.

The two types of actions you can add to steps when building a transform program are *XSLT* and *PeopleCode*.

Inserting XSLT Actions

When you select *XSLT* as the step action type you can develop the transform code using Oracle XSL Mapper or you can hand-code the program.

Installing, configuring and using Oracle XSL Mapper to develop transform programs is discussed elsewhere in this topic.

See [Developing Transforms Using Oracle XSL Mapper](#).

Note: After selecting XSLT as the action type, you must save the program before you can choose to use Oracle XSL Mapper or hand-code the program.

To insert XSLT actions:

1. From the **Action Type** drop-down list, select *XSLT*.
2. (Optional.) In the XSLT Description field, enter a description for the XSLT action.
3. Save the transform program.
A **Graphical Mapper** drop-down list appears.
4. Choose how to code the XSLT action:
 - To use Oracle XSL Mapper, click the XSLT action to highlight it. Then double-click the action to launch the mapper tool.
 - To hand-code the program, from the **Graphic Mapper** drop-down list box, select *No*. Right-click the action and select **View XSLT**.
5. Create code for the step/action.
 - If using Oracle XSL Mapper, beginning mapping records and fields as appropriate.
 - If hand-coding using XSLT, right-click the action and select **View XSLT**. The programming window appears and you can begin coding.

Inserting PeopleCode Actions

To insert PeopleCode actions:

1. From the **Action Type** drop-down list, select *PeopleCode*.
2. (Optional.) In the **PeopleCode Description** field, enter a description for the PeopleCode action.
3. Save the program.
4. Right-click and select **View PeopleCode** to open the programming window.
5. Enter PeopleCode appropriate for the step and action.

Making Working Storage Data Available Globally

XSLT transform steps can't access external data, but PeopleCode can. XSLT also has no global variables. However, the message itself is global, and can be used to pass working or external data to all steps in the transform program. During a PeopleCode step, you can add a special node to the message to contain the data, which is then available to subsequent transform steps.

Following is an example of a minimal input message:

```
<?xml version="1.0"?>
<Header>
  <LANGUAGE_CODE>en_us</LANGUAGE_CODE>
  <STATUS_CODE>1000</STATUS_CODE>
</Header>
```

The following PeopleCode inserts a node in the message to contain working data, by convention called *psft_workingstorage*. Then the PeopleCode inserts the current system date into that node:

```
/* Get the data from the AE Runtime */
```

```

Local TransformData &incomingData = %TransformData;
/* Set a temp object to contain the incoming document */
Local XmlDoc &inputDoc = &incomingData.XmlDoc;
/* Add a working storage node*/
Local XmlNode &wrkStorageNode =
    &inputDoc.DocumentElement.AddElement("psft_workingstorage");
/* Add the current system date to the working storage*/
Local XmlNode &sysDateNode = &wrkStorageNode.AddElement("sysdate");
&sysDateNode.NodeValue = String(%Date);

```

Following is the resulting output message:

```

<?xml version="1.0"?>
<Header>
  <LANGUAGE_CODE>en_us</LANGUAGE_CODE>
  <STATUS_CODE>0</STATUS_CODE>
  <psft_workingstorage>
    <sysdate>2002-01-24</sysdate>
  </psft_workingstorage>
</Header>

```

Any subsequent transform step now has access to the current system date. Make sure the last step that uses the *psft_workingstorage* node removes it from the final output, as with this XSLT fragment:

```

<xsl:template match="psft_workingstorage">
  <!-- Do not copy this node -->
</xsl:template>

```

Preserving Record and Field Aliases

When you apply a transform program to a rowset-based message, Integration Broker submits the message to the program in its final XML DOM compliant form, with any aliases you defined in place of the corresponding original record and field names.

In a PeopleCode transformation, the message is initially available as an XmlDoc object. However, you may want to transform the message using the PeopleCode Rowset class. Because XmlDoc object structure is compatible with Rowset object structure, you can copy the XML data to a rowset using the XmlDoc class CopyToRowset method.

Because the rowset to which you copy the data must be based on a message object instantiated from your original message, the rowset uses the message's original record and field names. If you defined aliases for any of the message records or fields, you must ensure that the rowset uses those aliases instead, or the XmlDoc data won't copy successfully.

The following set of conditions summarizes this situation:

- The message definition includes at least one record or field alias.
- You're applying a transform program to the message.
- Your transform program includes a PeopleCode step.
- The PeopleCode step uses a Rowset object to hold the message data.

Using Optional CopyToRowset Parameters

To make sure the rowset object uses the record and field aliases that exist in the XML data, you must specify two optional string parameters in the CopyToRowset method, which convey the message name and version:

```
CopyToRowset(&Rowset, Message_Name, Version)
```

The integration engine uses any aliases it finds in the specified message definition to rename the appropriate records and fields in the rowset object before copying the data. Following is an example of a rowset-based transform step that preserves aliases:

```
Local Message &TempMSG;
Local Rowset &TempRS;

/* Get the data from the AE Runtime */
Local TransformData &tempData = %TransformData;
/* Set a temp object to contain the incoming document */
Local XmlDoc &tempDoc = &tempData.XmlDoc;

/* Create a working rowset (no aliases used) */
&TempMSG = CreateMessage(Message.MyMsgName);
&TempRS = &TempMSG.GetRowset();

/* Copy message data to rowset (restoring aliases) */
&OK = &tempDoc.CopyToRowset(&TempRS, "MY_MSG_NAME", "MY_MSG_VERSION");

/* . . .Transform rowset data. . . */

/* Copy transformed rowset back to XmlDoc object */
&OK = &tempDoc.CopyRowset(&TempRS, "MY_MSG_NAME", "MY_MSG_VERSION");
```

Related Links

“XmlDoc Class Methods” (PeopleCode API Reference)

Tracing Transform Programs

For debugging purposes, you can trigger a trace of your transform program by adding a specific value to the Application Engine *trace* parameter, in one of the following ways:

- Specify the TRACE switch on the Application Engine command line, with the value 8192 added, for example:

```
-TRACE 8192
```

- Add the value 8192 to the TRACEAE parameter in the appropriate application server or Process Scheduler server configuration file, for example:

```
TRACEAE=8192
```

Related Links

“Understanding XmlDoc Classes” (PeopleCode API Reference)

“Understanding Tracing Application Engine Programs” (Application Engine)

“Using PSADMIN” (System and Server Administration)

Developing Transforms Using Oracle XSL Mapper

This section discusses how to develop transformations using Oracle XSL Mapper.

Understanding Oracle XSL Mapper

Oracle America has developed a tool that enables you to graphically map records and fields and that creates the underlying XSLT transformation code for you. You launch this tool directly from a PeopleSoft application engine transformation program. When you save the XSLT code in Oracle XSL Mapper, it automatically gets saved to the application database and your application engine transform program.

Note: You cannot use Oracle XSL Mapper to modify XSLT that you've hand-coded or created with any other XSLT editing tool.

Oracle XSL Mapper is an Oracle JDeveloper plug-in. Check the My Oracle Support website for information about supported versions.

See [Oracle Website](#).

Development Considerations

Note the following as you develop transformations using Oracle XSL Mapper:

- When you save XSL maps that you create in the mapper, the underlying XSL code is automatically saved to the application engine program.
- The mapper does not support codesets and working storage constructs. You must add these constructs manually into the XSL code using the Source view of the mapper.

Prerequisites for Developing Transforms Using Oracle XSL Mapper

To use Oracle XSL Mapper you must:

- Install Oracle JDeveloper.

Oracle XSL Mapper is part of Oracle JDeveloper .

See [Installing Oracle XSL Mapper](#).

- In PeopleSoft Configuration Manager, specify the path to the Oracle JDeveloper installation location.

See [Specifying the Installation Path and Classpath for Oracle XSL Mapper](#).

- All messages used in the mapper must have schemas generated for them.

For rowset-based messages, use the Message Definitions – Schema page to generate schemas. For nonrowset-based messages, use the Message Definitions – Schema page to add or import schemas for these types of messages.

See [Managing XML Message Schemas for Rowset-Based Messages](#) and [Adding Message Schemas to Nonrowset-Based Messages](#).

- You must create a Transform Only application engine program and define the program properties described earlier in this topic.

See [Defining a Transform Program](#).

- If you are using Oracle JDeveloper 11g, the JDK folder and its contents must exist inside the JDeveloper home location. Therefore you must install JDK or use an existing installation of JDK, and copy all the contents inside the <JDEV_HOME> directory. The following example shows the installation path: <JDEV11_HOME>/jdk/<jdk_copied_contents>
- If you are using Oracle 11gR2 or a later release, you must move the following folders from <Middleware_Home>\oracle_common\modules to <Middleware_Home>\jdeveloper\modules:
 - \oracle.xdk_11.1.0
 - \oracle.xmldef_11.1.1
 - \oracle.javatools_11.1.1

Installing Oracle XSL Mapper

Oracle XSL Mapper is a tool that provides the ability to rapidly create XSL-based transformation maps to support integration of PeopleSoft to third-party applications deployed through Integration Broker. The Oracle XSL Mapper is included in Oracle JDeveloper. Access to this feature requires the download of Oracle JDeveloper at the location below.

See [Oracle Website](#).

Note: After you install Oracle XSL Mapper do not move or delete the installed jar files from the default installation location. The PeopleSoft system reads this information from the default location for proper functioning of the feature.

Specifying the Installation Path and Classpath for Oracle XSL Mapper

For Oracle XSL mapper to function, the JDeveloper installation location and classpath must be specified in the PeopleSoft system in the PeopleSoft Configuration Manager. You enter this information on the Configuration Manager – Bus. Interlinks/JDeveloper page.

To specify the path to the Oracle XSL Mapper installation location and classpath:

1. Open PeopleSoft Configuration Manager (pscfg.exe).
2. Click the **Bus. Interlink/JDeveloper** tab.
3. Locate the JDeveloper Home Directory section at the bottom of the page.
4. In the **JDeveloper Home** field, enter the path or browse to the location where JDeveloper is installed.
5. Click the **Apply** button.

If you are using JDeveloper version 10.1.3 or 10.1.2, Configuration Manager populates the **JDeveloper Launch Mapper Classpath** field with the appropriate variables for your version of JDeveloper.

If you are using JDeveloper version 11.1.1 enter the following classpath in the **JDeveloper Launch Mapper Classpath** field:

```
<ORACLE_HOME>\jdeveloper\ide\extensions\oracle.ide.jar; <ORACLE_HOME>\jdeveloper\jdev\extensions\oracle.ide.xmldef.jar; <ORACLE_HOME>\jdeveloper\jdev\extensions\oracle.bpm.mapper.jar; <ORACLE_HOME>\jdeveloper\integration\lib\bpm-ide-common.jar; <ORACLE_HOME>\jdeveloper\ide\lib\javatools.jar; <ORACLE_HOME>\jdeveloper\jdev\lib\xmleditor.jar; <ORACLE_HOME>\oracle_common\modules\oracle.xdk_11.1.0\xmlparserv2.jar; <ORACLE_HOME>\oracle_common\modules\oracle.xmldef_11.1.1\xmldef.jar; C:\JDeveloper11g\oracle_common\modules\oracle.javatools_11.1.1\javatools-nodeps.jar
```


6. Click the **OK** button.

Launching Oracle XSL Mapper

You launch Oracle XSL Mapper from within an application engine transform program.

The first time you launch the mapper, the Oracle JDeveloper Welcome window appears.


This example shows the JDeveloper Welcome window.

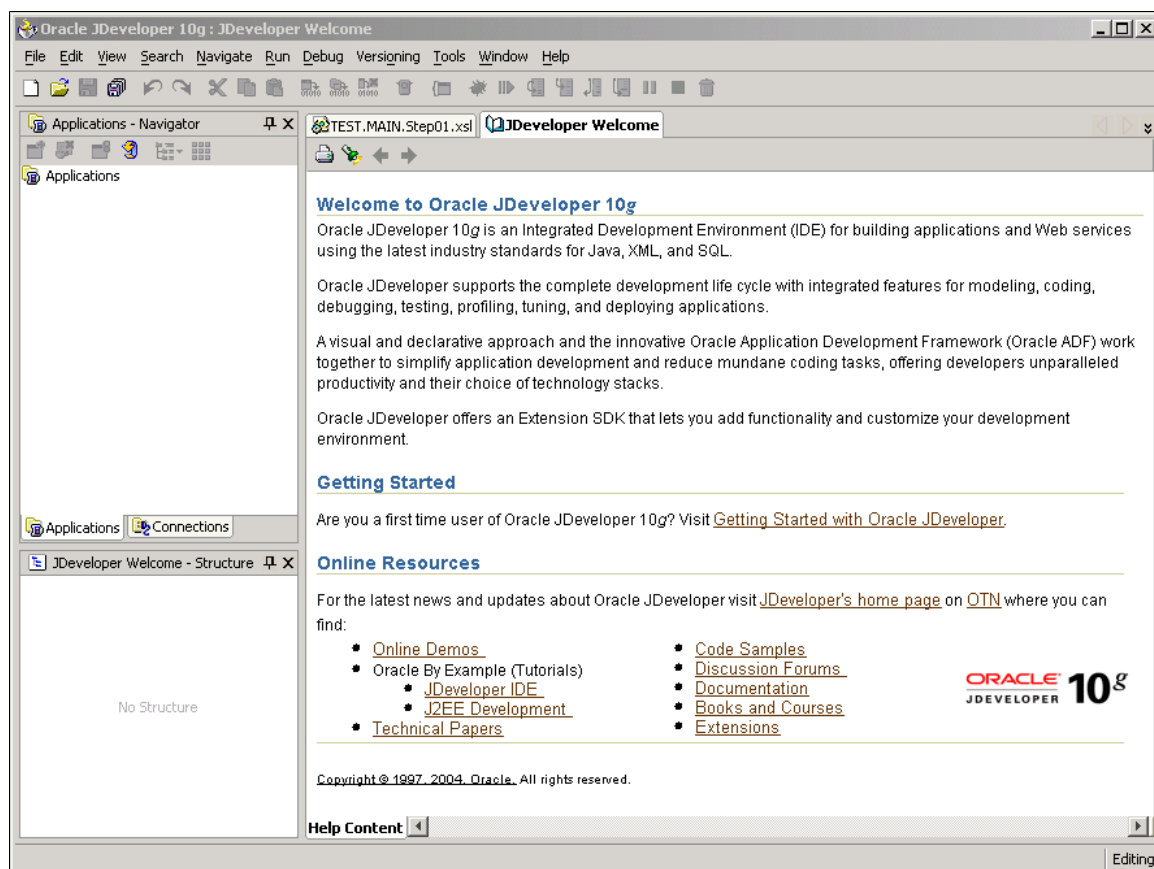

Note: The first time you launch Oracle XSL Mapper a Configure Tile Type Associations dialog box appears. While using the mapper you do not work with any Java files and you can disregard the dialog box.

The Oracle JDeveloper Welcome window displays only the first time you access JDeveloper. When you subsequently open Oracle XSL Mapper, the transform program appears in the Design view.

This example illustrates the Oracle XSL Mapper – Design view.

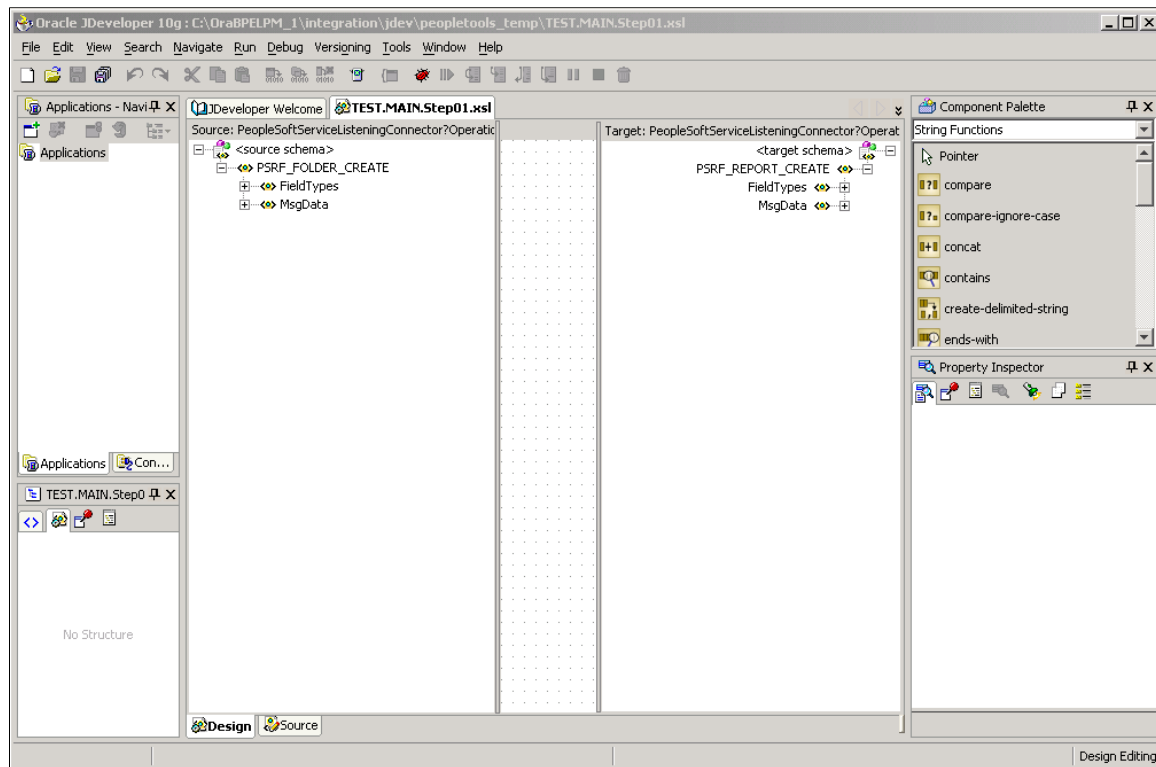

The transform program name in the mapper takes the following format:

```
<transform_program_name>.<section_name>.<step_name>.xsl
```

To launch Oracle XSL Mapper:

1. Create a *Transform Only* application engine program and define the program properties described earlier in this topic.
2. Double-click the XSLT action.
3. Access the Oracle XSL Mapper–Design view.

When accessing the mapper for the first time, when you double-click the XSLT action and launch Oracle JDeveloper the JDeveloper Welcome window appears. To switch to the Design view, above the Source pane, click the transform file name tab or from the Window menu click the transform file name.

In subsequent attempts to launch the mapper, double-clicking the XSLT action automatically opens the transform program in the Design view.

Accessing Oracle JDeveloper Documentation and Online Resources

This section provides information for access online Help, documentation and other resources for using Oracle XSL Mapper.

Online Help

Online Help is available via the Help menu while working with Oracle XSL Mapper.

Additional Oracle JDeveloper Documentation and Online Resources

As mentioned earlier in this section, Oracle XSL Mapper is a plug-in to Oracle JDeveloper. Documentation for the mapper is contained in the Oracle JDeveloper documentation set.

Note: The information provided in this section is current as of the publish date of the product documentation.

On the Developer Welcome page of the Oracle XSL Mapper there are links to documentation and online resources located on the Oracle web site.

In addition you can visit the Oracle Technology Network website to access documentation. Oracle JDeveloper documentation resources that may be helpful include:

- *Oracle Application Development Framework Guidelines Manual* .
- *Oracle Application Development Framework Case Manual*.
- *Installation Guide*.
- *Release Notes*.
- *J2EE Developer Online Help (the main documentation library)*

Navigating in Oracle XSL Mapper

This discusses how to:


- Navigate in the Design View.
- Navigate in the Source View.

Note: This section features a brief discussion of some of the key components and areas of the Oracle XSL Mapper development tool. The Oracle JDeveloper documentation provides in-depth details about using the Oracle XSL Mapper.

Navigating in the Design View

To access the Design view of Oracle XSL Mapper, click the **Design** tab at the bottom of the mapper.

This example illustrates the fields and controls on the Oracle XSL Mapper – Design view. You can find definitions for the fields and controls later on this page.

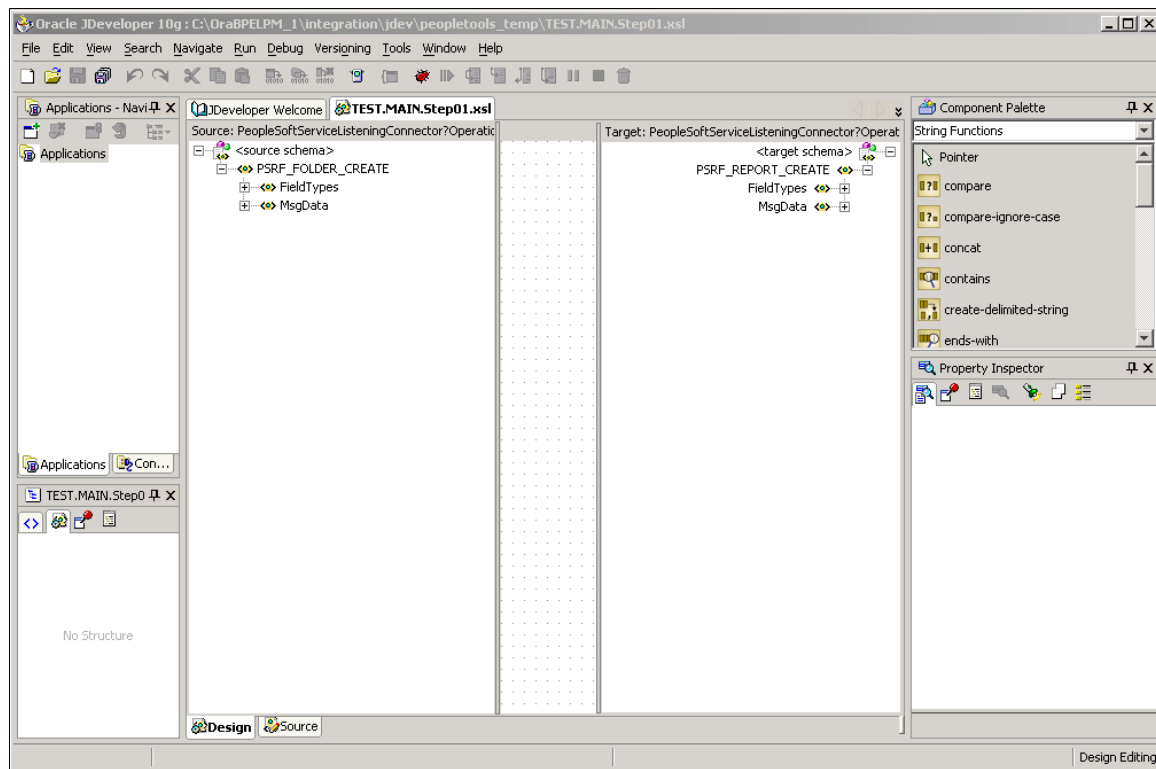

Use the Design view to map records and fields.

A few of the key areas of the Design view are discussed here. For additional information on Design view features, see the Oracle XSL Mapper documentation.


Field or Control	Description
Title Bar	The title bar displays the full path to the Oracle JDeveloper installation location and the name of the current transform program.
Developer Welcome (tab)	Click the tab to display links to online resources, such as documentation, online demos and code samples.
Transform Program name (tab)	Click to access the transform program.

Field or Control	Description
Source	The Source pane in the Oracle XSL Mapper main development view provides a hierarchical view of the source or input message and schema. Click the Expand button (+) button and the Collapse button (-) to expand and collapse data shown. Drag the edges of the pane in or out to adjust the viewing area.
Target	The Target pane in the Oracle XSL Mapper main development view provides a hierarchical view of the target or output message and schema. Click the Expand button (+) button and the Collapse button (-) to expand and collapse data shown. Drag the edges of the pane in or out to adjust the viewing area.
Design (tab)	Located at the bottom left-side of the window, click the tab to display the area where you map records and fields.
Source (tab)	Located at the bottom left-side of the window, click the tab to view and edit the raw XSLT code generated by Oracle XSL Mapper.

Navigating in the Source View

To access the Source view of Oracle XSL Mapper, click the **Source** tab at the bottom of the mapper.

This example illustrates the Oracle XSL Mapper–Source view.

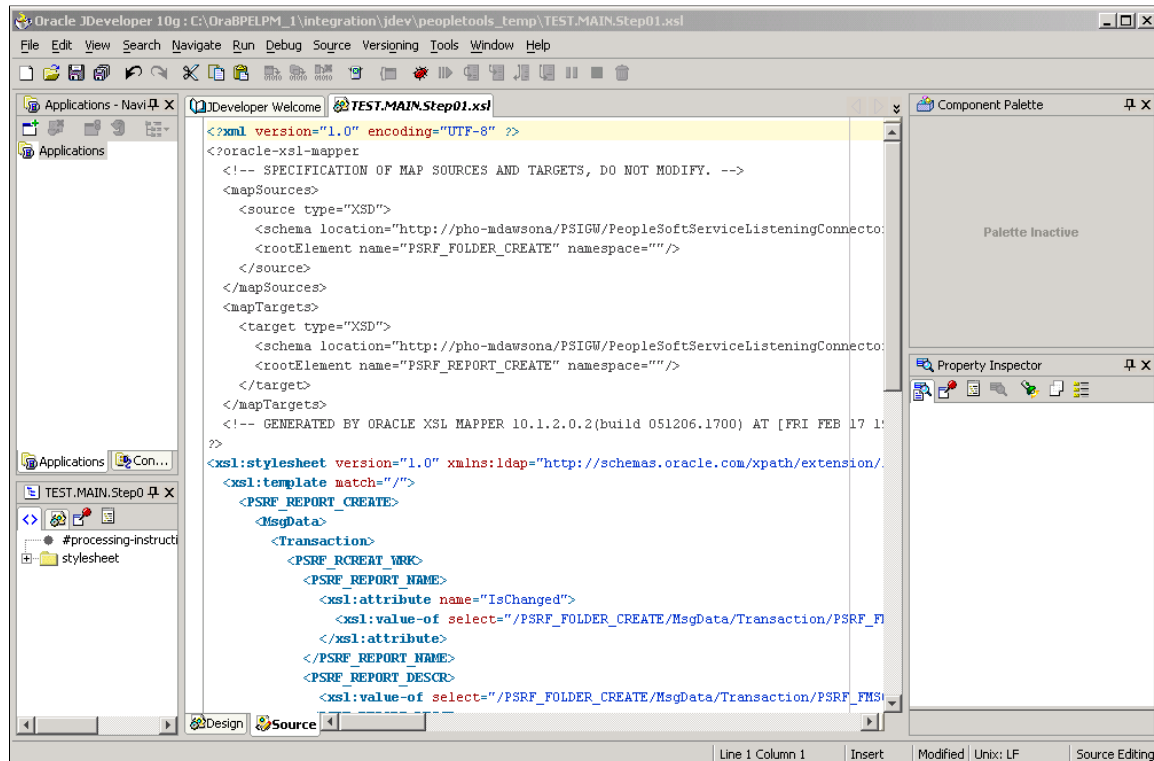


Use the Source view to view and edit the raw XSL code generated by the mapper.

For additional information on Source view features, see the Oracle XSL Mapper documentation.

Mapping Records and Fields

To map records and fields, use the Oracle XSL Mapper – Design view to drag record names and field names from the source pane to the target pane in the mapper.

This example illustrates the Oracle XSL Mapper – Design view.

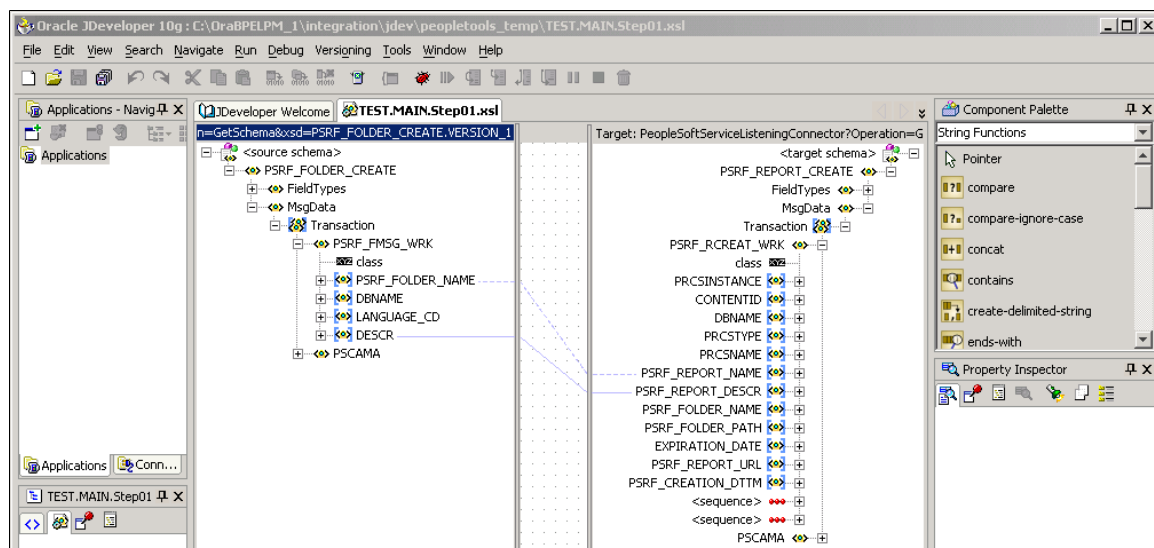

A solid green line appears as you drag the cursor from the source pane to the target pane. When you release the cursor, the line turns blue to show the association.

To map records and fields:

1. Open the Design view of Oracle XSL Mapper.
2. Expand the contents of both the source and target panes.

Click the **Expand** button (+) to expand each level or section until all records and fields appear.

Note: When working with rowset-based messages the content to map is located in the `MsgData` section.

3. In the source pane, click on the icon to the left of a record or field name and drag it to the name of the record or field in the target pane to which you want to map.

Repeat this step for each record or field to map.

4. Click the **Save** button.

Deleting Record and Field Maps

If you have not saved the program and want to delete the last map you made, simply right click in the Design view and select **Undo Link**. Otherwise, follow the instructions in this section.

To delete a record or field map:

1. In the source pane, click the record or field name.
2. From the **Edit** menu, click **Delete**.
3. Save the changes.


Viewing Raw XSLT Code

After you have made all of the record and field maps for the program. Click the **Source** tab at the bottom of the window to generate and view the raw XSL.

Testing XSL Maps

You can test XSL maps for validity that you generate in the mapper using the Test XSL Map window. To access the Test XSL Map window, right-click anywhere in the code area and select **Test**.

This example illustrates the Test XSL Map window.

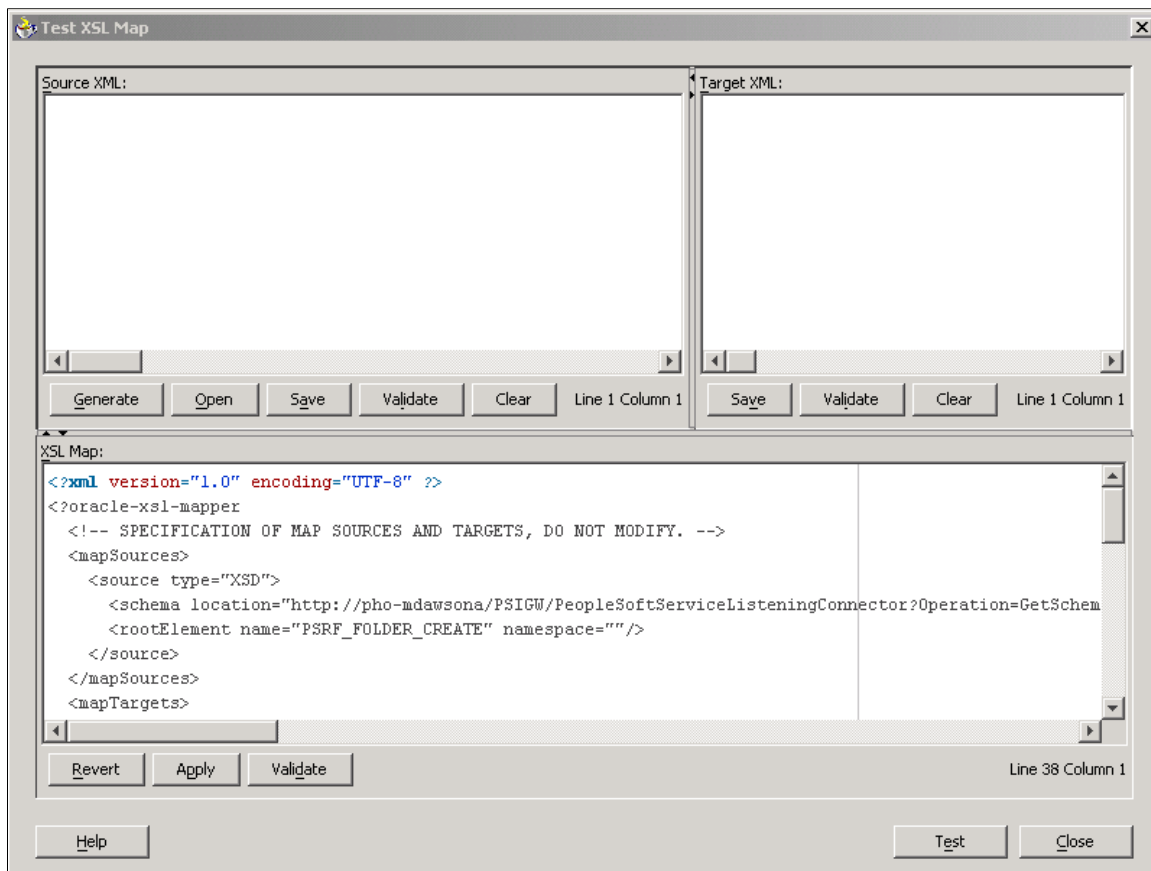

The code created by the record and field mapping displays in the bottom portion of the window.

Note: This Oracle XSL Mapper test feature tests the validity of the XSLT map code. It does not test the transformation. To test a transformation, use the Transformation Test tool in the PeopleSoft Pure Internet Architecture.

To test XSLT code:

1. Access the Oracle XSL Mapper–Source view.
2. Right-click anywhere in the code area and select **Test**.

The Test XSL Map window appears.

3. In the XSL Map section of the window, click the **Validate** button.

A validation success or error message displays.

Related Links

“Running the Transformation Test Utility” (Integration Broker Testing Utilities and Tools)

Adding and Modifying XSL Map Code

If you add code to XSLT that you create using Oracle XSL Mapper that contains any PeopleSoft-related elements it will not compile successfully, unless you create a configuration file of PeopleSoft elements that the mapper should ignore. After you create this file specify the file location and name in the Oracle XSL Mapper Preferences.

Creating Elements to Ignore Configuration Files

For example, you could add code that contains the following elements:

```
<element name = "psft_function">
<element name = "psft_workingstorage">
```


You would create a file using the following format, which tells Oracle XSL Mapper to ignore those elements:

```
<?XML version='1.0' encoding='windows-1252'?>
<elements-to-ignore>
  <element name = "psft_function"/>
  <element name = "psft_workingstorage"/>
</elements-to-ignore>
```

Specifying Elements to Ignore Configuration Files in Oracle XSL Mapper Preferences

Once you create the file of PeopleSoft elements to ignore, enter the file location and name in the mapper Preferences dialog box.

This example illustrates the Preferences dialog box in the Oracle XSL Mapper.

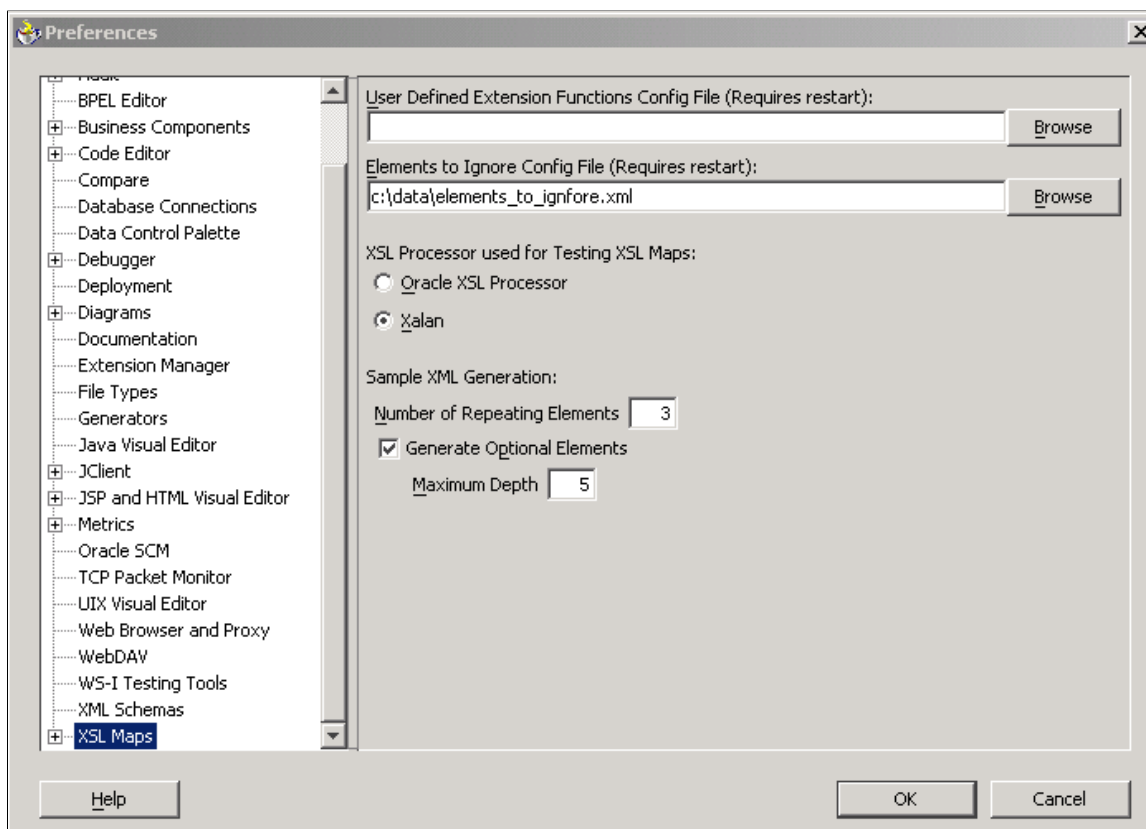

To specify an elements to ignore configuration file in Oracle XSL Mapper preferences:

1. In Oracle XSL Mapper, from the Tools menu, select **Preferences**.

The Preferences dialog appears.

2. In the list on the left-side of the window, click **XSL Maps**.
3. In the **Elements to Ignore Conf. File (Requires Restart)** field, enter or browse to the location of the elements to ignore configuration file that you created.
4. Click the **OK** button.

You must restart Oracle JDeveloper for the system to recognize the configuration file.

Developing Transform Programs Using the XSLT Transform Builder

This topic discusses how to:

- Navigate the XSLT Transform Builder.
- Add transformation programs to the XSLT Transform Builder.
- Define transformation metadata and properties.
- Manually build transformation program in the XSLT Transform Builder.
- Use the Oracle XSLT Mapper to build transformation programs in the XSLT Transform Builder.

Understanding the XSLT Transform Builder

The XSLT Transform Builder provides an alternative to using PeopleSoft Application Engine to build transformation programs.

The XSLT Transform Builder page (IB_XSLTBUILDER) enables you to build XSLT transformation steps using the PeopleSoft Pure Internet Architecture without having to access PeopleSoft Application Designer to create an Application Engine program.

Note: You can create and save only single transformation steps using the XSLT Transform Builder.

Using the XSLT Transform Builder you can manually code transformation programs. You can also launch the Oracle XSL Mapper from the XSLT Transform Builder page to develop transformation programs.

Understanding Using Oracle XSL Mapper to Build Transformation Programs in the XSLT Transform Builder

You can create transformation programs in the XSLT Transform Builder by accessing Oracle XSL Mapper.

As of the publication date of this documentation the Oracle XSL Mapper is included in Oracle JDeveloper.

The documentation in this topic describes prerequisites for using Oracle XSL Mapper to build transformation programs in the XSLT Transform Builder and how to launch the Oracle XSL Mapper from the XSLT Transform Builder page. The documentation in this topic does not describe how to use the Oracle XSL Mapper. See the Oracle XSL Mapper product documentation for information on how to use the tool.

Note: You cannot use Oracle XSL Mapper to modify XSLT that you've hand-coded or created with any other XSLT editing tool.

Prerequisites for Using the XSLT Transform Builder

There are no prerequisites for manually building transformation programs using the XSLT Transform Builder.

If you plan to use the Oracle XSL Mapper to build transformation programs in the XSLT Transform Builder you must:

- Download, install and configure the Oracle XSLT Mapper.

Oracle XSL Mapper is an Oracle JDeveloper plug-in. Check the My Oracle Support website for information about supported versions and for installation, configuration, and user documentation.

Important! After you install Oracle XSL Mapper do not move or delete the installed jar files from the default installation location, unless instructed otherwise in the product documentation. The PeopleSoft system reads this information from the default location for proper functioning of the feature.

- If you are using Oracle JDeveloper 11g, the JDK folder and its contents must exist inside the JDeveloper home location. Therefore you must install JDK or use an existing installation of JDK, and copy all the contents inside the <JDEV_HOME> directory. The following example shows the installation path:

```
<JDEV11_HOME>/jdk/<jdk_copied_contents>
```

- If you are using Oracle 11gR2 or a later release, you must move the following folders from <Middleware_Home>\oracle_common\modules to <Middleware_Home>\jdeveloper\modules:

- \oracle.xdk_11.1.0.
- \oracle.xmldef_11.1.1.
- \oracle.javatools_11.1.1.

- Set the JDeveloper home location (JDEV_HOME) in the Windows environment variables as follows:

```
<ORACLE_HOME>\jdeveloper
```

- Set the Mapper classpath (JDEV_MAPPER_CLASSPATH) in the Windows environment variables as follows:

```
<ORACLE_HOME>\jdeveloper\ide\extensions\oracle.ide.jar; <ORACLE_HOME>\jdevelop⇒
```

```
er\jdev\extensions\oracle.ide.xmldef.jar; <ORACLE_HOME>\jdeveloper\jdev\extensi⇒
ons\oracle.bpm.mapper.jar; <ORACLE_HOME>\jdeveloper\integration\lib\bpm-ide-co⇒
mmon.jar; <ORACLE_HOME>\jdeveloper\ide\lib\javatools.jar; <ORACLE_HOME>\jdevl⇒
oper\jdev\lib\xmleditor.jar; <ORACLE_HOME>\oracle_common\modules\oracle.xdk_11⇒
.1.0\xmlparserv2.jar; <ORACLE_HOME>\oracle_common\modules\oracle.xmldef_11.1.1\⇒
xmldef.jar;C:\JDeveloper11g\oracle_common\modules\oracle.javatools_11.1.1\javat⇒
ools-nodeps.jar
```

- Generate message schemas for messages. All messages used in the mapper must have schemas generated for them.

For rowset-based messages, use the Message Definitions–Schema page to generate schemas. For nonrowset-based messages, use the Message Definitions–Schema page to add or import schemas for these types of messages.

Managing Rowset-Based Messages

Managing Nonrowset-Based Message Definitions

Navigating the XSLT Transform Builder

To access the XSLT Transform Builder page select **PeopleTools > Integration Broker > Service Utilities > Build XSLT Transformations**.

This example illustrates the fields and controls on the XSLT Transform Builder page. You can find definitions for the fields and controls later on this page.

XSLT Transform Builder

Transform Name

IB_EXPL_WSDL

Description

▼ Transform Properties

In Message Name

IB_GENERIC

In Message Version

VERSION_1

In Root Element

Out Message Name

IB_GENERIC

Out Message Version

VERSION_1

Out Root Element

XSLT

Step Name

STEP01

☒ Active

Description

explodeWSDL

XSLT

<?xml version="1.0"?>
<xsl:stylesheet extension-element-prefixes="redirect"
version="1.0" xmlns:xslt="http://xml.apache.org/xslt"
xmlns:plnk="http://schemas.xmlsoap.org/ws/2003/05/partner-
link/" xmlns:redirect="org.apache.xalan.lib.Redirect"
xmlns:wSDL="http://schemas.xmlsoap.org/wSDL/"
xmlns:wsp="http://schemas.xmlsoap.org/ws/2002/12/policy"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
<xsl:output indent="yes" method="xml"/>
<xsl:variable name="targetPath"
select="//Oracle_TargetLocation" b

Mapper

Upload File

Encoding

UTF-8

Save

The page features the following sections:

Field or Control	Description
Metadata	This section contains the transform program name and description.

Copyright © 1988, 2025, Oracle and/or its affiliates.

497

Field or Control	Description
Transform Properties	Use the section to define the message name, message version, and root element before the transformation is applied, and the names to apply to them after the transformation is applied. By default, this section is collapsed when you open the XSLT Transform Builder page. Click the arrow next to the section label to expand and collapse the section.
XSLT	Use this section to define the step and XSLT code to program the step. You can code step manually in the space provided or upload code from a file. When using the Oracle XSL Mapper to code a step, after you exit the Oracle XSL Mapper, the code appears in this space.

The page features the following fields and controls:

Field or Control	Description
Transform Name	Name of the transformation program.
Description	Description of the transformation step.
In Message Name	Message name before transformation.
In Message Version	Message version before transformation.
In Root Element	Name of the root element before transformation. This field is required with the message type is a nonrowset-based message.
Out Message Name	Message name after transformation.
Out Message Version	Message version after transformation.
Out Root Element	Name of the root element after transformation. This field is required with the message type is a nonrowset-based message.
Step Name	Name of the step.
Active	Check the box to indicate the transformation step is active. Clear the box to deactivate the transformation step.

Field or Control	Description
Mapper	Click the button to launch the Oracle XSL Mapper to code the transformation.
Upload File	Click the button to upload transformation code from a file.
Encoding	If uploading transformation code from a file, select the encoding applied to file from the list. The options are: • <i>Non-Unicode.</i> • <i>UTF-16.</i> • <i>UTF-8. (Default.)</i>
Save	Click the button to save the transformation program.

Adding Transformation Programs to the XSLT Transform Builder

To add a transformation program to the XSLT Transform Builder:

1. Select **PeopleTools > Integration Broker > Service Utilities > Build XSLT Transformations.**
2. Click the **Add a New Value** tab.
3. In the **Program Name** field enter a name.
4. Click the **Add** button.

Defining Transformation Program Metadata Properties

In the metadata section at the top of the page and in the Transform Properties section of the page, enter the appropriate values for the fields and properties. See the Navigating the XSLT Transform Builder section earlier in this topic for descriptions of all fields that appear in these sections.

Manually Building Transformation Programs in the XSLT Transform Builder

Use the XSLT section of the XSLT Transform Builder page to manually build transformation programs.

To manually build a transformation program in the XSLT Transform Builder:

1. Define the metadata and transformation properties on the XSLT Transform Builder page described earlier in this topic.
2. In the **Step Name** field enter the step name.
The value cannot exceed eight characters.
3. Select the **Active** box to activate the step. Clear the box to deactivate the step.

4. In the **Description** field enter a description for the step.

The description cannot exceed 30 characters.

5. In the **XSLT** box enter code for the step using one of the following methods:

- Manually enter code in the box.
- Upload transformation code from a file.

From the **Encoding** list select the file encoding of the file you want to upload. Click the **Upload** button and browse to and select the file. The contents of the file appears in the **XSLT** box.

6. Click the **Save** button.

Using the Oracle XSLT Mapper to Build Transformation Programs in the XSLT Transform Builder

You can launch the Oracle XSLT Mapper to build transformation steps in the XSLT Transform Builder.

To use the Oracle XSLT Mapper to build transformation steps in the XSLT Transform Builder:

1. Review and perform the prerequisites for using the Oracle XSLT Mapper described earlier in this topic.
2. Define the metadata and transformation properties on the XSLT Transform Builder page described previously in this topic.
3. Click the **Launch** button to access the Oracle XSLT Mapper.

The XSLT Transform Builder page appears. The transformation code appears in the **XSLT** box and is read-only.

4. Click the **Refresh** button to enable editing of the code in the **XSLT** box.
5. Perform any additional code manipulation.
6. Click the **Save** button.

Invoking Transform Programs

Your transform program is invoked by PeopleSoft Integration Broker if you specify its name in the a routing definition for a service operation.

Accessing Transform Message Data

When PeopleSoft Integration Broker invokes a transform program, it inserts the message content into a PeopleCode system variable, *%TransformData*, which remains in scope throughout the program. Each step can access the variable in turn and modify its content, which then becomes available to the next step.

XSLT and PeopleCode steps access %TransformData differently:

- In XSLT, the data is automatically made available to your program. The XSLT program is literally a presentation of the output structure and data, which includes *xml* tags that reference, process and incorporate the input data into the output structure. There's no need to explicitly refer to %TransformData, which automatically receives the interpreted result of the XSLT.
- In PeopleCode, use the PeopleCode *TransformData* class to access %TransformData. You then access the XML data as a property of the TransformData object called *XmlDoc*, which you assign to an XmlDoc object and process normally. Because the XmlDoc object is a reference to the data portion of %TransformData, your modifications are automatically passed back to the system variable.

Using the TransformData Class

The PeopleCode TransformData class has several properties:

Property	Description
XmlDoc	Contains the XML message data. You can assign this to an XmlDoc object and process the data using the XmlDoc class methods and properties. This property is read/write.
Status	Communicates the success or failure of the transform program step to PeopleSoft Integration Broker. Set to 0 for success, the default value. Set to 1 to indicate that the message failed a filtering step. Set to 2 to indicate an error occurred. This property is read/write. See Filtering Messages .
SourceNode	The name of the node sending the message. This property is read only.
DestNode	The name of the node receiving the message. This property is read only.
SourceMsgName	The name of the message at the sending node. This property is read only.
DestMsgName	The name of the message at the receiving node. This property is read only.
SourceMsgVersion	The name of the message version at the sending node. This property is read only.
DestMsgVersion	The name of the message version at the receiving node. This property is read only.

Property	Description
routingDefnName	Retrieves the routing definition name for the transaction. You can then programmatically retrieve the routing properties specified on the Routings - Routing Properties page.
rejectTransform	Terminates the transaction for asynchronous service operation types. If you set this property for a transform in inbound asynchronous transaction the system will not create a subscription contract. In the Service Operation Monitor Details page for the transaction an informational message will be part of the error message link indicating that the transaction was terminated. If you set this property for an outbound asynchronous transactions the publication contract status in the Service Operation Monitor will be updated to <i>Done</i>. The message will not be sent out and an error message will once again be part of the Service Operation Monitor Details page for the transaction indicating the transaction was terminated.

Note: Because transform programs can apply to both request and synchronous response messages, the node *sending* the message could be a synchronous transaction target node that's sending a response back to the synchronous transaction source node, which in this case is the *receiving* node.

Handling Non-XML Data

Because they work only with XML DOM-compliant data, neither XSLT nor PeopleCode transform steps can process non-XML data. The XML DOM provides a way to incorporate such data into an XML structure so your transform programs won't produce errors.

If you're generating a non-XML outbound message in your PeopleSoft application, it's up to you to insert your message content into a special element containing a CDATA tag, as follows:

```
<any_tag psnonxml="yes">
  <![CDATA[your_nonXML_message_content]]>
</any_tag>
```

Note: *Any_tag* can be any tag you want to use.

The following restrictions apply to the content of inbound non-XML messages, such as those in CSV or PDF format, sent by third-party applications:

- Inbound non-XML text messages must be encoded as UTF-8-compliant characters.
- Inbound non-text, or binary, messages must be encoded in base64 format.

Renaming or Deleting Transform Programs

To invoke a transform program, you specify it as part of a routing definition. If you subsequently rename or delete that transform program, it still appears in the routing definition, so service operations using that modifier will fail. To prevent this, do the following:

- If you rename a transform program, make sure you reselect it by its new name in any routing definitions that apply it.
- If you delete a transform program, make sure you select a different program (or no program) in any routing definitions where that apply it.

Filtering Messages

This section provides an overview of message filtering and discusses how to work with a PeopleCode filtering example.

Understanding Message Filtering

You use filtering to suppress an input message based on its content. For example, you can suppress all inbound purchase order messages that specify order quantities less than the minimum number required for a discount.

Place filtering steps early in your Application Engine transform program; each message suppressed by the filter is one less message for subsequent steps to process.

You must use PeopleCode for filtering, so it'll probably be a distinct step. Because you must use the `XmlDoc` and `XmlNode` classes in your PeopleCode transform steps, you can analyze messages in any way that those classes support.

Filtering requires the following actions in your PeopleCode program:

1. Retrieve the message content from the `%TransformData` system variable.
2. Examine your filtering criteria.
3. If the message meets your criteria, do nothing further. It remains intact in the `%TransformData` system variable for the next transform program step to process.
4. If the message fails to meet your criteria, replace the entire message content with a single node called *Filter*, containing the reason it failed.

```
<?xml version="1.0"?>
<Filter>reason_for_failure</Filter>
```

5. Set the `TransformData Status` property to *1* to indicate failure.

PeopleSoft Integration Broker examines the *Status* property after each step, and terminates the transform program if its value is *1*. You can then view the message in Integration Broker Monitor and see the reason for the failure.

PeopleCode Filtering Example

The following example of filtering presents an input message, the PeopleCode filtering program, and the resulting output message.

Input Message

This is the input to the filtering step. Notice the line item order quantities (shown in emphasis):

```
<?xml version="1.0"?>
<PurchaseOrder>
  <Destination>
    <Address>123 Vine Street</Address>
    <Contact>
      <Name>Joe Smith</Name>
    </Contact>
    <Delivery type="ground">
      <Business>FedEx</Business>
    </Delivery>
  </Destination>
  <Payment>
    <CreditCard cardtype="visa">9999-9999-9999-9999</CreditCard>
  </Payment>
  <LineItems count="2">
    <Li locale="en_us" number="1">
      <Quantity>4</Quantity>
      <ProductName>pencil</ProductName>
      <UOM>box</UOM>
    </Li>
    <Li locale="en_us" number="2"><Quantity>10</Quantity>
      <ProductName>paper</ProductName>
      <UOM>large box</UOM>
    </Li>
  </LineItems>
</PurchaseOrder>
```

Note: Although this input message isn't in the PeopleSoft rowset-based message format, it is valid XML.

PeopleCode Filtering Program

This filtering program examines the line item order quantities of the input message and generates the output message that follows. The key statements are in bold:

```
/* Get the data from the AE Runtime */
Local TransformData &tempData = %TransformData;
/* Set a temp object to contain the incoming document */
Local XmlDoc &tempDoc = &tempData.XmlDoc;

/* Find the line items quantities contained in the incoming Purchase Order */
Local array of XmlNode &quantities =
  &tempDoc.DocumentElement.FindNodes("LineItems/Li/Quantity");
/* Temp storage of a node */
Local XmlNode &tempNode;

/* Loop through the quantities and make sure they are all above 5 */
For &i = 1 To &quantities.Len
  /* Set the temp node*/
  &tempNode = &quantities [&i];
  /* Make sure the node isn't empty*/
  If ( Not &tempNode.IsNull) Then

    /* Check the value, if not greater than 5 this does not pass filter*/
    If (Value(&tempNode.NodeValue) < 5) Then
      /* Clear out the doc and put in the "Filter" root node */If (&tempDoc.Pars⇒
```

```

eXmlString("<?xml version='1.0'?><Filter/>")) Then
    /* Get the new root node and set the value
    /* to be the reason for failing filter      */&rootNode = &tempDoc.Docu→
mentElement;&rootNode.NodeValue = "Line item quantity was found that was less than =>
5!";
    /* Set the status of the transformation to 1 for failed filter*/&tempDa→
ta.Status = 1;End-If;Break;End-If

End-If
End-For;

```

Output Message

This is the result of applying the PeopleCode filtering program:

```

<?xml version="1.0"?>
<Filter>Line item quantity was found that was less than 5!</Filter>

```

Applying Transformations

This section provides an overview of transformation and discusses using XSLT for transformation.

Understanding Transformation

Use a transformation when one node sends a request or response message with a data structure different from the structure required by the other node. One or both of the participating nodes can be PeopleSoft applications. At either end of the transaction, any of the following structure types may be required:

- The PeopleSoft rowset-based message format.
- An XML DOM-compliant non-rowset-based structure. This is generic XML data.
- A SOAP-compliant XML structure. This is also XML DOM-compliant.
- A non-XML structure. Third-party applications are more likely than PeopleSoft applications to require this type.

Your transformation can be between different structure types or between different structures of the same type.

Related Links

[Supported Message Structures](#)

Using XSLT for Transformation

An XSLT transformation simulates the original message structure, then specifies how to treat nodes within that structure. You can:

- Copy the original content of a node without changing anything.
- Define and insert a new version of a node.

- Enter any structure or content directly.
- Eliminate a node by omitting reference to it, or by not inserting anything new in its place.

XSLT Transformation Example

The XSLT wrapper is required.

```
<?xml version="1.0"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="1.0">
```

The primary node tag matches the original message structure by matching its top level content tag, the message name (*QE_SYNC_MSG*). Between the message template tags, you can insert any structure or content you want. PeopleSoft Integration Broker replaces each *xs/* tag with the data it references, producing a transformed message as the output of the step.

```
<xsl:template match="QE_SYNC_MSG">
  <QE_SYNC_MSG>
    <xsl:copy-of select="FieldTypes"/>
    <MsgData>
      <Transaction>
        <xsl:apply-templates select="MsgData/Transaction/QE_SALES_ORDER"/>
        <xsl:copy-of select="MsgData/Transaction/PSCAMA"/>
      </Transaction>
    </MsgData>
  </QE_SYNC_MSG>
</xsl:template>
```

The following node example is defined to match a record in the input message by its top level content tag, the record name (*QE_SALES_ORDER*). This template is applied by the *xsl:apply-templates* tag of the preceding node (shown emphasized).

Between the record template tags, you can insert any structure or content you want. In this example, *90* is prepended to the *QE_ACCT_ID* value, and the *QE_ACCOUNT_NAME* field is renamed to *QE_ACCOUNT* (shown emphasized). Also, any existing value in the **DESCRLONG** field is removed, and the remaining fields are passed through with their original values.

```
<xsl:template match="QE_SALES_ORDER">
  <QE_SALES_ORDER><xsl:attribute name="class">
    <xsl:value-of select="@class"/></xsl:attribute>
    <xsl:variable name="temp" select="QE_ACCT_ID"/>
    <QE_ACCT_ID><xsl:value-of select="concat(90,$temp)"/></QE_ACCT_ID><QE_ACCO→
    UNT><xsl:value-of select="QE_ACCOUNT_NAME"/></QE_ACCOUNT>
    <QE_ADDRESS><xsl:value-of select="QE_ADDRESS"/></QE_ADDRESS>
    <QE_PHONE><xsl:value-of select="QE_PHONE"/></QE_PHONE>
    <QE_FROMROWSET/>
    <QE_TOROWSET/>
    <QE_SEND_SOA_BTN/>
    <QE_SEND_SOS_BTN/>
    <DESCRLONG></DESCRLONG>
  </QE_SALES_ORDER>
</xsl:template>
```

Finally, you need the closing wrapper tag:

```
</xsl:stylesheet>
```

Note: You can find more information about XSLT at the World Wide Web Consortium (W3C) web site.

Note: A working transformation example using XSLT is provided in the PeopleTools SDK. The location of the example is `<PS_HOME> \sdk\pstransform\samples\TRANSFORMTST.xml`.

Applying Message Transformations at the Integration Gateway

Typically, you apply filtering, transformation, and data translation to a message at the node level on the application server by using a transaction modifier to invoke an Application Engine transform program. However, on systems with high transaction volumes, Application Engine transformations can constrict message throughput. To improve performance, you can apply XSLT transformation programs at an integration gateway.

Note: While you may apply transformations at the integration gateway level, PeopleSoft strongly recommends that you apply them at the application server level due to a more robust infrastructure to support them.

See [Apache Website](#).

Understanding Applying Message Transformations at the Integration Gateway

Only XSLT transformations can be applied at the gateway. Message filtering, data translation, and PeopleCode transformations must still be applied at the node using an Application Engine transform program, and can be applied in addition to gateway-based transformations.

You can apply XSLT transformations at any gateway that handles the message you want to transform.

When a gateway with transformation enabled processes an IBRequest, it examines the transformation properties in the `integrationGateway.properties` file to determine if they specify a transformation for the same message with the same source and target nodes as the IBRequest. If these values match, the gateway compiles the specified XSLT transformation program and applies it to the message, then sends the transformed message to the target node.

Note: The IBRequest can specify only a `RequestingNode` or only a `DestinationNode`, but it must specify at least one of these values—`ig.DefaultServer.LocalNode` supplies the other one.

With synchronous transactions, the gateway applies transformations only to the request message, not to the response message. If the original message is compressed and base64 encoded, the gateway decompresses and decodes it before applying the transformation, then compresses and encodes it again before sending.

Note: The integration gateway retains all compiled XSLT transformation programs in a memory cache to improve performance during subsequent transformations. If you edit the code of a transformation program that's been used before, you must purge the compiled programs from the cache so the new version will be recompiled. To do this, click the **Refresh** button on the gateway definition.

Developing and Implementing Gateway-Based Transformation Programs

Developing and implementing gateway-based transform programs requires the following activities:

1. Determine if the message you want to transform qualifies for gateway-based transformation:
 - The message content must be XML-DOM compliant.
 - The message must not have nonrepudiation activated.
2. Develop the XSLT transformation program.

See [Applying Transformations](#).

You can develop, test and debug the program within Application Engine, but you must save the program code as an external text file. Place the file in any location that can be accessed from the integration gateway machine, for example:

```
C:\XSLProgs\MyTransform.xsl
```

3. Configure the appropriate gateway property settings in the integrationGateway.properties file to enable the transformation.

See [Setting Integration Gateway Properties for Gateway-Based Transformations](#).

4. Refresh the gateway properties.

Setting Integration Gateway Properties for Gateway-Based Transformations

To apply gateway-based transformations, set the following properties in the integrationGateway.properties file.

For each message you want to transform, you must create a set of property entries using the same number, which associate a given transformation program with that message. However, you can specify the same transformation program for multiple messages.

When entering these settings, each transformation must be numbered for identification, using the convention ig.transform1, ig.transform2, ig.transform3, and so on.

Property	Description
ig.isGatewayTransformationEnabled	Specify whether transformation is enabled for this gateway. Valid values are: • <i>TRUE</i>. Transformation is enabled. • <i>FALSE</i>. Transformation is disabled — the integration gateway will ignore the other transformation properties. This is the default value.

Property	Description
<code>ig.DefaultServer.LocalNode</code>	Enter the name of the node definition that will be used as the source or destination node for a given transformation if either of those values isn't identified; for example you must specify: <pre>ig.DefaultServer.LocalNode=DEF_NODE</pre> All transformations require that you specify both a source node and a destination node. This property applies if either the <code>ig.transformN.SourceNode</code> property or the <code>ig.transformN.DestinationNode</code> property is empty or invalid, or if the <code>IBRequest</code> doesn't specify either <code>RequestingNode</code> or <code>DestinationNode</code>.
<code>ig.transforms</code>	Specify the number of transformations configured in the <code>integrationGateway.properties</code> file; for example: <pre>ig.transforms=7</pre>
<code>ig.transformN.XSL</code>	Enter the full path and filename of transformation program <i>N</i>. Your path specification must use either double back slashes or single forward slashes as separators; for example: <pre>ig.transform4.XSL=C:\\XSLProgs\\MyTransform.xml ig.transform4.XSL=C:/XSLProgs/MyTransform.xml ig.transform4.XSL=/usr/xsls/MyTransform.xml</pre>
<code>ig.transformN.MessageName</code>	Enter the name of the message to be transformed by transformation program <i>N</i>; for example: <pre>ig.transform4.MessageName=MY_MSG_A</pre>
<code>ig.transformN.SourceNode</code>	Enter the name of the source node from which the original message is being sent, or enter the value <i>ANY</i>; for example: <pre>ig.transform4.SourceNode=NODE_Aig.transform4. SourceNode=ANY</pre> If this value is <i>ANY</i>, the value of the <code>ig.DefaultServer.LocalNode</code> property will be used instead.

Property	Description
<code>ig.transformN.DestinationNode</code>	Enter the name of the target node to which the transformed message is being sent, or enter the value <i>ANY</i>; for example: <pre>ig.transform4.DestinationNode=NODE_Big.t⇒ ransform4. DestinationNode=ANY</pre> If this value is <i>ANY</i>, the value of the <code>ig.DefaultServer.LocalNode</code> property will be used instead.
<code>ig.transformN.DestinationMessageName</code>	(Optional.) Enter the name that the target node uses for the transformed version of the message, if it's different from the original message name; for example: <pre>ig.transform4.DestinationMessageName=MY_⇒ MSG_B</pre> This enables the gateway to rename the message before sending it, so the target node will recognize and accept it.

Understanding Logged Errors

If an error occurs when you refresh the gateway properties or during a transformation, it's entered in the gateway's error log file.

Integration Gateway Refresh Errors

After you specify integration gateway properties and refresh the gateway, errors can be generated for the following reasons:

- No value is specified for `ig.transformN.XSL`.
- No value is specified for `ig.transformN.MessageName`.
- No value is specified for both `ig.DefaultServer.LocalNode` and `ig.transformN.SourceNode`.
- No value is specified for both `ig.DefaultServer.LocalNode` and `ig.transformN.DestinationNode`.
- The gateway is in the process of loading, compiling or caching a transformation program.

Runtime Transformation Errors

Errors are generated for the following reasons when the gateway attempts to apply a transformation:

- Nonrepudiation is enabled for the message.
- The integration gateway is unable to transform the message.
- The integration gateway is unable to decompress and decode the message.
- The integration gateway is unable to compress and encode the message.

- The IBRequest does not specify a RequestingNode and no value is specified for `ig.DefaultServer.LocalNode`.
- The IBRequest does not specify a DestinationNode and no value is specified for `ig.DefaultServer.LocalNode`.
- The IBRequest specifies neither a RequestingNode nor a DestinationNode.

Performing Data Translation

This section provides an overview of data translation and discusses how to:

- Define codeset groups.
- Define codesets.
- Define codeset values.
- Import and export codesets between databases.
- Delete codesets.
- Use XSLT for data translation.
- Work with an XSLT translation example.
- Work with a PeopleCode translation example.

Understanding Data Translation

Use data translation to modify message content rather than structure, although you can also make local structural changes. It's most appropriate when the sending and receiving systems use different field values, or different combinations of fields and their values, to represent the same information.

Following is a sample scenario:

- Application A transmits customer names in four fields: *Title*, *First*, *Middle*, and *Last*.
- Application B uses two fields: *Last* and *First*. It doesn't use a title, but includes the middle name as part of the *First* field.
- Application C uses only one field: *AccountID*.

Clearly the representation used by one application won't be understood by either of the other two. PeopleSoft Integration Broker can apply a transform program to translate each of these representations into a version appropriate to the receiving application.

One Integration Broker node can store in its codeset repository the equivalent fields and values used by another node. When it receives a message from the other node containing a customer name, it can use its codeset repository to translate the information into the form it prefers. It can likewise reverse the process for messages outbound to the other node.

For a given integration, you can allocate the responsibility for performing data translation in different ways. You can distribute the translation activity among the participating nodes, or you can designate one Integration Broker node to do all the data translation as a hub, whether the messages are inbound, outbound, or being redirected between the other nodes. Using a single node, if possible, can reduce the need for duplicating repository data.

Data Translation Elements

The following elements constitute the codeset repository, managed as PeopleSoft Pure Internet Architecture components:

Term	Definition
Codeset group	Maintains a list of the significant data fields and their values that a particular node might send in an initial message. These are name/value pairs a translation program might find (match) and use as the basis for determining what the result message should contain. These name/value pairs are known as <i>match names</i> and <i>match values</i>. Each PeopleSoft Integration Broker node that requires data translation must belong to a codeset group.
Codeset	A specific set of match name/match value pairs selected from an existing codeset group. The selected name/value pairs are the basis for possible field value combinations that you want to match in a message, and to which your translation program can respond by modifying the message content. Each codeset typically represents one set of fields that require translation for a given message.
Codeset values	A codeset value is a named value you define, also known as a <i>return value</i>. Your translation program can output the return value as a result of matching a specific combination of match values from a codeset. You associate multiple combinations of codeset values with the combination of an initial codeset group, a codeset from that initial group, and a result codeset group. For each permutation of match values selected from the codeset, you define a different combination of codeset values to apply to your result message.

The other key element of data translation is your translation program, which invokes the codesets and codeset values you've defined.

Data Translation Development Sequence

You must initially define these elements in a particular order:

1. Two codeset groups.
2. A codeset based on one of the codeset groups.
3. A set of codeset values.
4. A data translation program, in XSLT or PeopleCode.

However, it's unlikely that you'll be able to fully define any of these elements without some trial and error. You may find you'll have to modify and extend each element in turn as you develop your data translation program.

Defining Codeset Groups

Use the Codeset Groups page (IB_CODESETGRPVAL) in the Codeset Groups component (IB_CODESETGROUP) to define codeset groups. To access the Codeset Groups page, select **PeopleTools > Integration Broker > Integration Setup > Codesets > Codeset Groups**.

This example illustrates the Codeset Groups page.

Codeset Groups

Codeset Group Name CS_SAP_01

Parameters			
Match Name		Match Value	
1	business	US_mail	+ -
2	cardtype	visa	+ -
3	locale	en_us	+ -
4	type	ground	+ -
5	type	priority	+ -
6	uom	box	+ -

To define a codeset group:

1. Add a new value, enter a codeset group name, and click Add.

Enter a name that reflects a common quality of the nodes you plan to assign to this group; for example, the name of the software they all use to manage shipping.

The Codeset Group page appears.

2. Add a new row.
3. Enter a match name.

This is the name of a data field that might be part of a message sent by a node belonging to this codeset group. You don't have to create an entry for every field, just the ones that you'll need to translate or use for reference in a translation.

4. Enter a match value.

This is one of the possible values of the data field represented by the match name.

- Repeat steps 2 through 4 for each significant name/value pair that you expect to appear in a message.

This doesn't need to be all possible values of all of the message fields, just the names and values you expect to require translation.

- Assign one or more nodes to this codeset group.

Every initial and result node involved in a data translation must belong to a codeset group. You must assign each participating node to an appropriate codeset group by an entry in its node properties.

Note: The assignment for each node is required only in the database of the node performing the data translation. This translating node needn't be either the source or the target. Multiple nodes that represent data the same way may be assigned to the same codeset group.

Related Links

“Configuring Nodes” (Integration Broker Administration)

Defining Codesets

Use the Codesets page (IB_CODESET) in the Codesets component. (IB_CODESET). Select **PeopleTools > Integration Broker > Integration Setup > Codesets > Codesets** to access the Codeset page.

This page illustrates the Codesets page.

Parameters		Customize Find	First	1-4 of 4	Last
	*Match Name	Match Value			
1	locale				
2	locale	en_us			
3	uom				
4	uom	box			

To define a codeset:

- Add a new value and enter a codeset group name on which to base this codeset.
- Enter a codeset name and click Add.

Enter a name that reflects the purpose of this codeset; for example, *SAP_SHIP_METHOD*, to translate the representation of a shipping method in a message. The Codesets page appears.

- Add a new row.

4. Select a match name from the set defined for the associated codeset group.
5. Select a match value from the set defined for the selected match name.

Note: You can leave the value blank. If so, you should do the same for each match name in this codeset, in addition to any other values you select for them. A combination consisting of *all* blank values is treated as a wild card by PeopleSoft Integration Broker, which enables it to respond to unanticipated values specified in your translation program with default behavior that you define.

6. Repeat steps 3 through 5 to enter all the name/value pairs that may need to be matched.

The name/value pairs you select should encompass only the possible value combinations that your translation program needs to match for a single translation. You define a different codeset for each translation based on this codeset group.

Defining Codeset Values

Use the Codeset Values page (IB_CODESETVAL) in the Codeset Values component (IB_CODESETVAL). Select **PeopleTools** > **Integration Broker** > **Integration Setup** > **Codesets** > **Codeset Values** to access the Codeset Values page.

This example illustrates the Codeset Values page.

Codeset Values

From Group CS_SAP_01

Codeset Name PS_SAP_PO_01

To Group CS_PSFT_01

Codesets Find | View All First 1 of 1 Last

Description SHIPMENTMETHOD_SAP_PS_01 + -

Select	Match Name	Match Value
☐	locale	
☒	locale	en_us
☐	uom	
☒	uom	box

Codeset Values Customize | Find | View All | First 1-2 of 2 Last

*Return Name	Return Value		
PS_LOCALE_01	en_uk	+	-
PS_UOM_01	carton	+	-

To define codeset values:

1. Add a new value and select a codeset group name for the *From* group.

This is the codeset group to which the initial node belongs.

2. Select a codeset name from the codesets based on the group you selected.

This is the codeset whose match name/match value permutations you wish to match.

3. Select a codeset group name for the *To* group.

This is the codeset group to which the result node belongs.

4. Click **Add**.

The Codeset Values page appears. The upper grid contains the selected codeset's match name/match value pairs, and the lower grid contains the return values you specify. Each permutation that you define has its own Description field, which can help you distinguish between permutations that may be subtly different from each other.

Note: To configure an existing codeset values definition, enter its *From* group, codeset name and *To* group on the search page.

5. Select check boxes to define a permutation of match name/match value pairs.

For each match name, you can select at most one match value.

A permutation consisting of all blank values serves as a wild card; it matches any input value combination that isn't matched by any other permutation. However, a permutation with some blank and some non-blank values works differently; it requires the names with blank values to actually match blank field values in the input data.

Note: You'll generally define only permutations that you expect the input data to contain, but make sure you allow for unforeseen match values by including permutations with all blank values. You can then specify default return values for those permutations. With a large number of match names in the codeset, you can make sure to catch all unforeseen combinations by defining a permutation with all blank match values.

6. In the Code Set Values grid, enter a return name, and a return value for that name.

You can use any return name you want, because only your codeset translation program refers to it. Your translation program can use the return value as a field value or as a node name in the output data.

Important! The set of return names you define *must be identical* for all of the permutations of match name/match value pairs for the current codeset in this definition. Your translation program invokes the codeset and applies the return names from this definition, but it can't anticipate which permutations will be matched, or which actual return values it's applying — just the return names.

7. (Optional.) In the Code Set Values grid, add a new row and repeat step 6.

Add as many return name/return value pairs as you need for your output based on the current permutation. If the permutation is matched in the input data, the code set values you define for that permutation become available for you to call and insert in the output data.

8. (Optional.) At the top level of this page, add a new row and repeat steps 5 through 7.

This inserts a new permutation row, in which you can define a different permutation of match name/match value pairs that you expect for the current codeset. For each permutation, you'll define a separate, independent set of codeset values.

Importing and Exporting Codesets Between Databases

PeopleSoft provides two Data Mover scripts that you can use to import and export codesets between databases:

- CODESET_DELETE_IMPORT.DMS

Use this script to purge and then import codeset data into a target database.

- CODESET_EXPORT.DMS

Use this script to export codeset data from a source database to a target database.

Deleting Codesets

Before you delete a codeset, you must delete any codeset values associated with it.

Deleting Codeset Values

To delete codeset values for a codeset:

1. Select **PeopleTools > Integration Broker > Integration Setup > Codesets > Codeset Values**. The Codeset Values page displays.
2. In the Find an Existing Value tab, in the **Codeset Name** field, enter the name of the code set you want to delete, or use the **Lookup** button to locate it.
3. In the Codeset Values section, deselect the **Select** check box for each match name corresponding to the code set match name you want to delete, or click the **Delete a Row** button (-).

Repeat this process for as many codeset match names that are used.

4. Click the **Save** button.

Deleting Codesets

To delete a codeset:

1. Select **PeopleTools > Integration Broker > Integration Setup > Codesets > Codeset**.
2. Select the codeset to delete. The Codeset page displays.
3. Locate the row that contains the codeset you want to delete, and click the **Delete a Row** button (-) button on that row.
4. Click the **Save** button.

Using XSLT for Data Translation

Once you've defined the match name/match value permutations for a given codeset and defined the return values for those permutations, you can write an XSLT translation program that invokes the codeset and applies the return values.

An XSLT translation is based on XSLT transformation structure. However, although you could combine both tasks into a single program, it's better to keep them separate for easier understanding and maintenance.

Psft_function Nodes

To implement data translation capability, PeopleSoft Integration Broker provides a custom XSLT tag called *psft_function*. Each *psft_function* node in your program comprises a single instance of data translation that invokes a particular codeset and applies a specified set of codeset values.

Runtime invocation of codesets in XSLT is a two part process: first the input document is transformed and then all instances of *psft_function* are resolved in the output document.

Note: You can insert a *psft_function* node anywhere inside the XSLT template containing the fields you want to translate. However, you'll find it easiest to place it at or near the point in the template where the return values will go, to avoid having to specify a complex path to that location.

The *psft_function* tag has the following attributes:

Attribute	Description
name	Set to <i>codeset</i> .
codesetname	Identifies the codeset whose name/value permutations you want to match in the input data. The routing that invokes this transform program identifies the initial and result nodes involved, and PeopleSoft Integration Broker examines their definitions to determine the <i>From</i> group and <i>To</i> group. The combination of these two keys and the codeset name identifies the codeset values definition to apply.
source	(Optional.) Overrides the name of the initial node specified by the routing. PeopleSoft Integration Broker uses the specified node's codeset group as the <i>From</i> group key, thus invoking a different codeset values definition.
dest	(Optional.) Overrides the name of the result node specified by the routing. PeopleSoft Integration Broker uses the specified node's codeset group as the <i>To</i> group key, thus invoking a different codeset values definition.

Note: The *source* and *dest* attributes don't change the initial and result nodes specified in the routing; they just invoke the codeset groups to which those nodes belong.

Following is an example of *psft_function* using all of its attributes:

```
<psft_function name="codeset" codesetname="PS_SAP_PO_01"
  source="SAP_02" dest="PSFT_03">...</psft_function>
```

Parm and Value Nodes

The *psft_function* node can contain two tags, *parm* and *value*:

- Use the *parm* tag to specify a match name from the codeset values definition that you specified for this translation. You do this with the tag's only attribute: *name*. Set this to a match name from the codeset values definition.

The *parm* node should contain a match value, usually specified as an *xsl:value-of* tag that identifies where the value resides in the input data. Use one *parm* node for each distinct match name in the codeset values definition.

- Use the *value* tag to specify a return name from the codeset values definition that you specified for this translation. Also use the *value* tag to identify where to place the return value assigned to that return name for the matched permutation and how to apply that value.

Use one *value* node for each return name in the codeset values definition that you want in your output.

Value Tag Attributes

The *value* tag has the following attributes:

Attribute	Description
name	Identifies a return name from the codeset values definition you specified for this translation. The return value assigned to this return name can be used as a data value or as a node name in your output depending on the attributes you specify.
select	Identifies an XSLT path (XPATH) to the location where the return value should be applied in the output data.
createIfDNE	(Optional.) Set to <i>yes</i> to ensure that the node specified by the <i>select</i> attribute is created if it does not exist yet. The return value is inserted as the value of that node.
createNodeFromValue	(Optional.) Set to <i>yes</i> to use the return value as the name of a new node, created where the <i>select</i> attribute specifies. The <i>value</i> tag can contain a valid XSLT value for that node, usually specified as an <i>xsl:value-of</i> tag that identifies where the value resides in the input data.

Following is an example of a *value* node:

```
<value name="PS_RET_01" select="." createNodeFromValue="yes"><xsl:value-of
  select="CreditCard"/></value>
```

Related Links

[Using XSLT for Transformation](#)

XSLT Translation Example

The following example of XSLT data translation presents an example input message, the XSLT translation program, and the resulting output message.

Input Message

This is the input to the XSLT translation:

```
<?xml version="1.0"?>
<PurchaseOrder>
  <Destination>
    <Address>123 Vine Street</Address>
    <Contact>
      <Name>Joe Smith</Name>
    </Contact>
    <Delivery type="ground">
      <Business>FedEx</Business>
    </Delivery>
  </Destination>
  <Payment>
    <CreditCard cardtype="visa">9999-9999-9999-9999</CreditCard>
  </Payment>
  <LineItems count="2">
    <Li locale="en_us" number="1">
      <Quantity>15</Quantity>
      <ProductName>pencil</ProductName>
      <UOM>box</UOM>
    </Li>
    <Li locale="en_us" number="2">
      <Quantity>10</Quantity>
      <ProductName>paper</ProductName>
      <UOM>large box</UOM>
    </Li>
  </LineItems>
</PurchaseOrder>
```

Note: Although this input message isn't in the PeopleSoft rowset-based message format, it is valid XML.

XSLT Data Translation Program

This translation program processes the input message in this example and generates the output message that follows. The statements shown emphasized demonstrate some uses of the *psft_function* node:

```
<?xml version="1.0"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="1.0">
  <xsl:template match="PurchaseOrder">
    <po>
      <xsl:apply-templates/>
    </po>
  </xsl:template>

  <xsl:template match="Destination">
    <dest>
```

```

    <address><xsl:value-of select="Address"/></address>
    <name><xsl:value-of select="Contact/Name"/></name>
    <delivery>
      <type>
        <psft_function name="codeset" codesetname="PS_SAP_PO_03" dest="PSFT_03">
          <param name="type"><xsl:value-of select="Delivery/@type"/>
            </param><value name="PS_RET_01" select="."/></psft_function>
          </type>
          <carrier><psft_function name="codeset" codesetname="PS_SAP_PO_03" source="SAP_03">
            <param name="Business"><xsl:value-of select="Delivery/Business"/></param><value name="PS_RET_01" select="."/></psft_function>
            </carrier>
          </delivery>
        </dest>
      </xsl:template>

    <xsl:template match="Payment">
      <payment><psft_function name="codeset" codesetname="PS_SAP_PO_02"><param name="cardtype"><xsl:value-of select="CreditCard/@cardtype"/></param><value name="PS_RET_01" select="." createNodeFromValue="yes"><xsl:value-of select="CreditCard"/></value></psft_function>
        </payment>
      </xsl:template>

    <xsl:template match="Li">
      <li><xsl:attribute name="id"><xsl:value-of select="@number"/></xsl:attribute>
        <name><xsl:value-of select="ProductName"/></name>
        <qty><xsl:value-of select="Quantity"/></qty>
        <uom><psft_function name="codeset" codesetname="PS_SAP_PO_01"><param name="locale"><xsl:value-of select="@locale"/></param><param name="uom"><xsl:value-of select="UOM"/></param><value name="PS_RET_01" select="."/><value name="PS_RET_02" select="."/type" createIfDNE="yes"/></psft_function>
          </uom>
        </li>
      </xsl:template>
    </xsl:stylesheet>

```

Output Message

This is the result of applying the XSLT translation:

```

<po>
  <li id="">
    <name>pencil</name>
    <qty>15</qty>
    <uom>Carton</uom>
    <type>Bic</type>
  </li>
  <li id="">
    <name>paper</name>
    <qty>10</qty>
    <uom>Box</uom>
    <type>Bic</type>
  </li>
  <dest>
    <address>123 Vine Street</address>
    <name>Joe Smith</name>
    <delivery>
      <type>Ground</type>
    </delivery>
  </dest>
</po>

```

```

        <carrier>Federal Express</carrier>
    </delivery>
</dest>
<payment>
    <VISA>4024-9920-9892-8982</VISA>
</payment>
</po>

```

PeopleCode Translation Example

Although XSLT is the recommended language for using the codeset repository to translate message data, you can use PeopleCode for this purpose as well. Because XSLT works only with XML DOM-compliant message data, you must use PeopleCode if the message you're translating contains non-XML data, including formats like comma separated values (CSV).

Once you've defined the match name/match value permutations for a codeset with respect to a given target codeset group and defined the return values for those permutations, you can write a PeopleCode translation program that invokes that codeset and applies the return values.

FindCodeSetValues Built-in Function

To implement data translation capability, Integration Broker provides a PeopleCode built-in function called *FindCodeSetValues*, which takes four parameters and returns a two dimensional array.

The following example of PeopleCode data translation presents an example input message, the PeopleCode translation program, and the resulting output message.

Input Message

This is the input to the PeopleCode translation:

```

<?xml version="1.0"?>
<Header>
    <LANGUAGE_CODE>en_us</LANGUAGE_CODE>
    <STATUS_CODE>0</STATUS_CODE>
</Header>

```

PeopleCode Data Translation Program

This translation program processes the input message in this example, and generates the output message that follows. The statement shown emphasized demonstrates the use of the *FindCodeSetValues* function:

```

/* Get the data from the AE Runtime */
Local TransformData &incomingData = %TransformData;

/* Set a temp object to contain the incoming document */
Local XmlDoc &tempDoc = &incomingData.XmlDoc;

/* Find the Language and status codes value*/
Local string &langCode = &tempDoc.DocumentElement.FindNode("LANGUAGE_CODE").
    Node Value;
Local string &statusCode = &tempDoc.DocumentElement.FindNode("STATUS_CODE").
    Node Value;

/* Create an array to hold the name value pairs */
Local array of array of string &inNameValuePairsAry;

/* Load the array with some values */
&inNameValuePairsAry = CreateArray(CreateArray("LANG", &langCode),
    CreateArray("STATUS", &statusCode));

```

```

/* Find the codeset values */
&outAry = FindCodeSetValues("STATUS_CHANGE", &inNameValuePairAry,
    &incomingData.SourceNode, &incomingData.DestNode);

/* Create the new output doc */
If &tempDoc.ParseXmlString("<?xml version=""1.0""?><NewHeader/>") Then

    /* Make sure something was returned */
    If &outAry.Len > 0 Then

        /* Create the new Status Code Node */
        Local XmlNode &statusNode = &tempDoc.DocumentElement.AddElement("STATUS");

        /* Since this is a 2D array, get the Return Value*/
        &statusNode.NodeValue = &outAry [1][2];
    End-If;
End-If;

```

Output Message

This is the result of applying the PeopleCode translation:

```

<?xml version="1.0"?>
<NewHeader>
    <STATUS>Open</STATUS>
</NewHeader>

```

Related Links

“FindCodeSetValues” (PeopleCode Language Reference)

Rejecting Transformation Programs

Situations may arise when you may want to terminate a transaction. For example, you may not want a transaction published to a specific node.

Using the %TransformData.rejectTransform property and the %IB_Transform_Rejected built-in function, you can terminate asynchronous transactions based on content data.

You set this property in a PeopleSoft Application Engine transform program as follows:

```
%TransformData.rejectTransform = %IB_Transform_Rejected;
```

If you set the %TransformData.rejectTransform property within a transform of an inbound asynchronous transaction, the system will not create a subscription contract and the data is not sent. If you view such a transaction in the Service Operations Monitor, the Operation Instances page displays a status of *Done*. If you open the Asynchronous Details page in the monitor, an **Error** link displays. If you click the link an informational message appears that indicates that the transaction was terminated.

If you set this property for an outbound asynchronous transaction, the Publication Contracts page in the Service Operations Monitor will show a contract status of *Done* for the transaction. However, the system does not send the message and, as with the inbound scenario, the Asynchronous Details page for the transaction will display an **Error** link. If you click the link an informational message appears that indicates that the transaction was terminated.

Related Links

“Understanding Asynchronous Service Operations Statuses” (Integration Broker Service Operations Monitor)

“Monitoring Asynchronous Service Operation Instances” (Integration Broker Service Operations Monitor)

“Understanding Viewing Asynchronous Service Operation Details” (Integration Broker Service Operations Monitor)

Terminating Transformation Programs

If you need to terminate a transform program for reasons that aren’t considered error conditions by PeopleSoft Integration Broker, you can use a PeopleCode step to force the transform program to terminate and generate a readable error message as well.

To generate an error:

1. Replace the entire message content with a single node called *Error*, containing the reason for the error.

```
<?xml version="1.0"?>
<Error>reason_for_error</Error>
```

2. Set the TransformData *Status* property to 2 to indicate error status.

PeopleSoft Integration Broker examines the *Status* property after each step and terminates the transform program if its value is 2. You can then view the message in Service Operations Monitor and see the reason for the error.

Note: If an XSLT or PeopleCode step fails for reasons that you haven’t taken into account, Integration Broker automatically sets the *Status* property to 2 and aborts the transform program, but you can’t provide your own error message.

Managing Error Handling, Logging, Tracing, and Debugging

Understanding Error Handling, Logging, Tracing and Debugging

This topic provides an overview of error handling, logging, tracing and debugging.

Error handling, logging, tracing, and debugging with PeopleSoft Integration Broker can occur on an integration gateway, application server, or application engine, depending on the type and location of processing.

Understanding Integration Gateway Error Handling

Error handling is an integration gateway service that assists connectors to manage errors that occur during processing. Errors on the integration gateway are handled by target connectors and listening connectors.

This section discusses:

- Target connector error handling.
- Listening connector error handling.
- Integration gateway exception types.

Target Connector Error Handling

The Target Connector Interface (TCI) specifies the methods that target connectors must implement for the integration gateway to manage them. These methods include a set of standard exceptions that target connectors generate when they experience errors during processing.

Listening connectors or the gateway manager catch these exceptions and provide an appropriate implementation for each. When the source of the message is an integration engine, the gateway manager catches the exceptions. Otherwise, listening connectors are responsible for handling exceptions that are generated during processing.

Listening Connector Error Handling

Unlike target connectors, listening connectors are not managed by the gateway manager and, therefore, do not adhere to any interface. However, a listening connector must invoke the gateway manager to pass a message from the integration gateway to the integration engine.

The gateway manager has predefined exceptions.

In general, exceptions are thrown in a target connector and caught by a listening connector. As a result, a listening connector must catch these exceptions and handle them as appropriate. Typically, the listening connector generates an error message and sends it back to the requester.

Integration Gateway Exception Types

This section discusses integration gateway exception types.

Standard Exceptions

The following standard error and exception types are handled by the integration gateway, target connectors, and listening connectors:

<i>Exception Type</i>	<i>Description</i>
DuplicateMessageException	A target connector attempted to process a message that has already been processed. This is usually discovered based on an error that is attained from the external system that is being contacted. Of the connectors that are delivered with the PeopleSoft software, only the PeopleSoft 8.1 target connector (PSFT81TARGET) can generate this exception. Target connectors are not required to generate this exception.
ExternalApplicationException	The message reached its intended destination but could not be processed. Determining that the destination could not process a message requires significant knowledge of the destination system, which a target connector might not have. Whenever possible, a target connector should attempt to determine this situation; otherwise this task must be decentralized and handled outside of the integration gateway. For example, the HTTP target connector (HTTPTARGET) generates this exception when the external system returns an HTTP system code of <i>500</i>.
ExternalSystemContactException	The target connector cannot establish a connection with the intended destination. This is one of the most common exceptions. When this exception is thrown during an asynchronous transaction, PeopleSoft Integration Broker tries to resend the message until successful.
GeneralFrameworkException	A general error occurred.

Exception Type	Description
InvalidMessageException	A connector or the gateway manager determined that the message cannot be processed because of missing or erroneous information in a request or response.
MessageMarshallingException	A gateway service's attempt to get information from an IBRequest or IBResponse failed. This can occur when the gateway services attempt to access a content section of a document by using an out-of-range index from one of the following methods: • GetContentSectionAt(index) • GetContentSectionInfoAt(index) • RemoveContentSectionAt(index) If you try to access IBRequest or IBResponse with an out-of-range index by using any of these methods, this exception is thrown automatically and processing is interrupted.
MessageUnmarshallingException	A gateway service's attempt to build an IBRequest or IBResponse failed. Failure can occur when: • Instantiating an IBRequest or IBResponse from a Multipurpose Internet Mail Extensions (MIME) format where the message that was sent does not comply with the PeopleSoft MIME format. • Instantiating an IBRequest by using the PS_XML format and passing an invalid PS_XML message. This is typically from the HTTP listening connector. • Setting invalid values to methods, such as setTransactionID or setMessageType. These failures cause the integration gateway to generate this exception automatically and processing is interrupted.

Java Exceptions

Target connectors and listening connectors can handle miscellaneous Java exceptions, such as NullPointerException and ArrayOutOfBoundsException.

Managing Integration Gateway Message and Error Logging

This section provides an overview of message and error logging and discusses how to:

- Set up message and error logging.
- View non-English characters in integration gateway log files.
- Manage message logging.
- Manage error logging.

Understanding Message and Error Logging

Error and message logging is a gateway service that you use to monitor messages that flow through the integration gateway.

Logging takes place within both target and listening connectors. Connectors can log all message requests and responses. As a result, you can use logging to:

- Track message flow.
- Troubleshoot processing errors.

Setting Up Message and Error Logging

By default, an integration gateway logs all errors and warnings, as well as information of important, standard, and low importance.

Set up message and error logging by using the `integrationGateway.properties` file. Use the Logging Setting section to view or change default settings, such as the level of gateway logging, where the system writes log files, the maximum size of the log file, and the number of file backups or archives to keep.

Related Links

“Setting Logging Properties” (Integration Broker Administration)

Viewing Non-English Characters in Integration Gateway Log Files

To view non-English characters in integration gateway log files, enable UTF-8 encoding in your web browser. For example, if you are using Microsoft Internet Explorer, you can enable UTF-8 encoding by selecting View, Encoding, Unicode (UTF-8). If you are using Mozilla Firefox, you can enable UTF-8 encoding by selecting View, Character Encoding, Unicode (UTF-8).

Managing Message Logging

Message logging records the following information for messages that pass through the integration gateway:

- Time and date.
- Message description.
- Content of the passed message object.
- Message level.

The default location of the integration gateway message log is <PIA_HOME>\webserv\<DOMAIN>\applications\peoplesoft\PSIGW.war\msgLog.html.

Change the location of the log in the integrationGateway.properties file.

Message Logging in Target Connectors

Message logging in a target connector occurs:

- Before delivering the request to the external system.

The connector logs the request in the format in which the external system delivered it. For example, an HTTP target connector logs the exact HTTP output stream request. The PeopleSoft target connector logs the MIME request to be sent to the integration engine.

- After it receives a response from the external system.

The connector logs the response in the format in which it receives it. For example, an HTTP target connector logs the exact HTTP input stream response. The PeopleSoft target connector logs the MIME response that it received from the integration engine.

Message Logging in Listening Connectors

Message logging in a listening connector occurs:

- At the point where the request enters the system.

The connector logs the request in the format in which the sending system delivers it. For example, the HTTP listening connector logs the exact HTTP input stream request. The PeopleSoft listening connector logs the MIME request that it received from the integration engine.

- Following the delivery of a response to the requestor system.

The connector logs the response in the format in which it was delivered. For example, the HTTP listening connector logs the exact HTTP output stream response. The PeopleSoft listening connector logs the MIME response that it sent back to the integration engine.

Message Logging Methods and Parameters

Invoke the logMessage method for integration gateway message logging:

```
logMessage(String Description, Object message, int MessageLevel)
```

Use the following parameters:

<i>Parameter</i>	<i>Description</i>
Description	Specify a description as a string.

<i>Parameter</i>	<i>Description</i>
Object	Specify the message object. Typically this object is an <code>IBRequest</code> or <code>IBResponse</code> . If another object is passed, the <code>toString</code> method is invoked for the object, and the result is logged.
MessageLevel	Set the relative importance of the information that you are logging. The <code>ig.log.level</code> property setting in the <code>integrationGateway.properties</code> file determines the log level that is currently in effect. If the <code>MessageLevel</code> value that is passed here is less than or equal to the <code>ig.log.level</code> property setting, the message is written to the log file. Values are: • 3: Important information. • 4: Standard information. • 5: Low-importance information. The <code>ig.messageLog.filename</code> property in the <code>integrationGateway.properties</code> file determines the log file location.

Managing Error Logging

Error logging captures processing errors that occur in the integration gateway. When an error occurs, the following information is logged:

- Error level.
- Description.
- Message catalog entry information.
- Stack trace identifying the problem.
- `IBRequest` and `IBResponse` (if available).

The default location of the integration gateway error log is `<PIA_HOME>\webserv\<DOMAIN>\applications\peoplesoft\PSIGW.war\errorLog.html`.

Change the location of the log in the `integrationGateway.properties` file.

Error Logging Methods and Parameters

Invoke the `logError` method for integration gateway error logging:

```
logError (String Description, IBRequest, IBResponse, int ErrorLevel, Throwable)
```

Use the following parameters:

Parameter	Description
Description	Specify a description as a string.
IBRequest	Specify the IBRequest for this transaction, if available. If not available, pass Null.
IBResponse	Specify the IBResponse for this transaction, if available. If not available, pass Null.
ErrorLevel	Specify whether the log is written to permanent storage. This determines the severity of the error. The <code>ig.log.level</code> property in the <code>integrationGateway.properties</code> file determines the log level that is currently in effect. If the <code>ErrorLevel</code> value that is passed here is less than or equal to the <code>ig.log.level</code> property setting, the error is written to the log file. Values are: • <code>100</code>: Language exception. • <code>1</code>: Standard gateway exception. • <code>2</code>: Warning. The <code>ig.errorLog.filename</code> property in the <code>integrationGateway.properties</code> file determines the log file location.
Throwable	Specify the Java exception or error that is associated with the error. This is used to log the stack trace that is associated with the error.

The gateway manager and delivered listening connectors feature built-in error logging that invokes the `logError` method. The delivered target connectors do not feature built-in error logging, and instead generate errors to the gateway manager or listening connectors, where they are handled or logged.

Managing Application Server Logging and Tracing

Use the PeopleSoft Application Server Administration menu to:

- View application server and Oracle Tuxedo log files.
See “Editing Configuration and Log Files” (System and Server Administration).
- Trace Structured Query Language (SQL) and PeopleCode on your domains.

See “Trace Options” (System and Server Administration).

- Set the level of network tracing (log fence).

See “Domain Settings” (System and Server Administration).

- View the certificate authentication logs, including information about mismatched distinguished names and certificates that are not in the database.

This information is contained in the APPSRV.LOG file.

You can also use the tracing functionality in PeopleSoft Application Engine, which enables you to monitor the performance of transforms in your implementation of PeopleSoft Integration Broker.

Related Links

[Understanding Filtering, Transformation, and Translation](#)

“Understanding Tracing Application Engine Programs” (Application Engine)

Debugging Integrations

This section discusses how to:

- Debug handler PeopleCode.
- Handle common issues.

Debugging Handler PeopleCode

Use the Handler Tester utility to debug service operation handler PeopleCode.

The Handler Tester utility enables you to use the PeopleSoft Pure Internet Architecture to test any of the following handler types:

- OnSend.
- OnRequest
- OnRouteReceive
- OnRouteSend.
- OnAckReceive
- OnNotify.

You can test handlers without setting up a routing definition, without having pub/sub booted on your application server, and without impacting other developer activity on the system.

Related Links

“Understanding the Handler Tester Utility” (Integration Broker Testing Utilities and Tools)

Handling Common Issues

Use this table to handle common issues in PeopleSoft Integration Broker:

<i>Area or Suspected Issue</i>	<i>Debugging Suggestion</i>
Application server exceptions.	Check the application server log: <PS_CFG_HOME>\appserv\<Domain>\LOGS\ appsrv.log
Message handlers are not running.	Check the application server domain status or queue status in the PeopleSoft Application Server Administration menu (PSAdmin). Select Domain Status, Server Status or Domain Status, Queue Status.
Integration gateway.	Check the integrationGateway.properties file and verify the property settings. The default file location is <PIA_HOME>\websevr \<DOMAIN>\applications\peoplesoft\PSIGW.war.war\WEB-INF\integrationGateway.properties.
Integration gateway.	Check the integration gateway message log. The default file location is <PIA_HOME>\websevr \<DOMAIN>\applications\peoplesoft\PSIGW.war.war \msgLog.html.
Queues are paused.	Check the Service Operations Monitor. Select PeopleTools > Integration Broker > Service Operations Monitor > Administration > Queue Status.
A node is paused.	Check the Service Operations Monitor. Select PeopleTools > Integration Broker > Service Operations Monitor > Administration > Node Status.
Incorrect gateway uniform resource locator (URL).	Check the Gateways component to verify that the integration gateway URL is correct. Select PeopleTools > Integration Broker > Configuration > Integration Gateways.
Node inactive.	Check the node definition. Select PeopleTools > Integration Broker > Integration Setup > Node Definitions.
Subscription PeopleCode is missing or incorrect.	Check the Service Operations Monitor. Select PeopleTools > Integration Broker > Monitoring > Monitor Asynchronous Services > Subscription Contracts.

Area or Suspected Issue	Debugging Suggestion
A service operation is inactive.	Check the service operation definition in the PeopleSoft Pure Internet Architecture. Select PeopleTools > Integration Broker > Integration Setup > Service Operation Definitions .
There are transform problems.	- Check the Application Engine object in PeopleSoft Application Designer. - For before and after images, check the Service Operations Monitor. For asynchronous service operations, select PeopleTools > Integration Broker > Service Operations Monitor > Monitoring > View Asynchronous Details. Click the View XML link for the publication contract or subscription contract. For synchronous service operations, select PeopleTools > Integration Broker > Service Operations Monitor > Monitoring > View Synchronous Details. Use the Log Type drop-down list box to select Request Transformed or Response Transformed, and then click View XML. - Verify that the TraceAE flag in the following directory equals 8192: <code><PS_CFG_HOME>\appserv\<Domain>\psappsrv.cfg</code> Setting the TraceAE flag in the psappsrv.cfg file instructs the application server to generate a transformation trace log with the .aet extension, written to the following directory: <code><PS_CFG_HOME>\appserv\<Domain>\LOGS\ <operID>_<machine name>.AET</code> The log file contains: - The original XML structure as it entered the transformation engine. - The output of the XML as it passed through each step of the transform program.

<i>Area or Suspected Issue</i>	<i>Debugging Suggestion</i>
Integration Broker security	Set the application server logging level to 4 or greater to capture information related to the following situations: • No routing at source node. • No routing at target node. • User invoking a service operation has different permissions than specified on the service operation on the source node. • No node password found on source node. • No node password found on target node. • Mismatched node password on source and target nodes. • No permissions set for the service operation on the source node.

Chapter 21

Providing Services

Understanding Providing Web Services

The Provide Web Service wizard steps you through the task of providing web services.

Based on the Service Type, the appropriate documents are created.

<i>Service Type</i>	<i>Document</i>
Service	WSDL document
REST Service	WADL document
OpenAPI REST Service	OpenAPI document

Understanding Providing WSDL Documents

This section provides an overview of provided WSDL documents provided by the Provide Web Service wizard.

WSDL Features

Provided WSDL documents include support WS-interoperability standards for WSDL and include:

- WS-Addressing header elements for asynchronous request/response operation types.
- WS-Security elements UsernameToken and SAMLToken.

In addition, provided WSDL documents feature PartnerLinkType elements.


WSDL Document Specifications

Integration Broker can provide WSDL documents in WSDL 1.1 or WSDL 2.0 format. By default, the Provide Web Service wizard used to provide WSDL documents generates WSDL in 1.1 format and features and option to generate WSDL documents in WSDL 2.0 format.

See [Step 1: Select Services](#) for providing Non-REST web services, [Step 1: Select Services](#) for providing REST web services, and [Step 1: Select Services](#) for providing OpenAPI REST web services.

The following graphic illustrates the differences between WSDL 1.1 and WSDL 2.0 documents at the abstract and concrete layers:

This diagram illustrates the differences between the abstract and concrete layers of the WSDL 1.1 and WSDL 2.0 specifications.

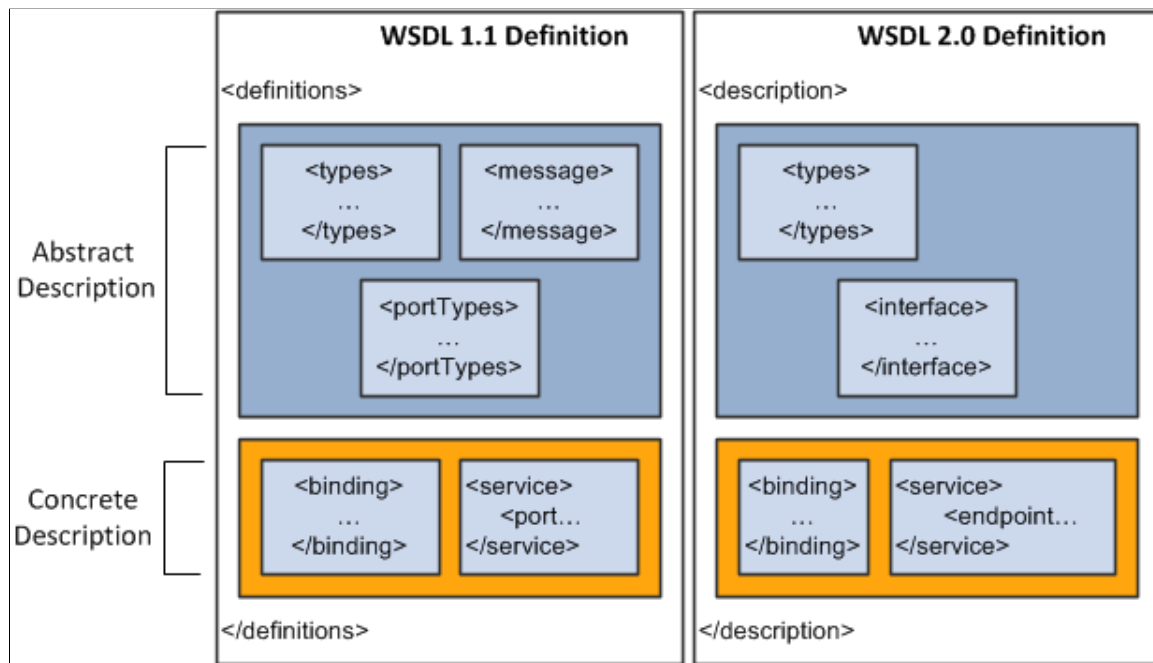

Additional information about the elements in WSDL 1.1 documents and WSDL 2.0 documents is provided elsewhere in this topic.

See [Provided WSDL Documents](#).

Supported Operation Types for WSDL Documents

The Provide Web Service wizard can create WSDL documents for service operations having the following operation types:

- Synchronous.
- Asynchronous one-way.
- Asynchronous request/response.

Requirements for Nonrowset-Based Message Schemas

This section discusses requirements and considerations for creating nonrowset-based message schemas for service operations in order to generate WSDL documents using the Provide Web Service wizard.

Note: The PeopleSoft system automatically generates message schemas for rowset-based messages.

Target Namespace

Nonrowset-based message schemas must contain a target namespace. If no target namespace exists in the schema an error occurs when the system generates the WSDL document.

You may define multiple schema imports to the same target namespace, but different schema locations must be defined.

Multiple Root Element and Complex Type Tags

If the PeopleSoft system finds multiple root `<element>` or `<complexType>` tags in nonrowset-based message schemas, only the first one is referenced in the WSDL document or container message schema.

In addition, the WSDL would allow schema imports to the same target namespace but different schema locations and use `<xsd:include>` when the schema Namespace is same as the WSDL namespace.

Related Links

[Prerequisites for Providing Services](#)

Locations for Publishing WSDL Documents

Using the Provide Web Service wizard, you can publish WSDL documents to the follow locations:

- PeopleSoft WSDL repository. (Application database.)

The PeopleSoft WSDL repository is the default publishing location. All generated WSDL documents are published to the PeopleSoft WSDL repository. You may publish WSDL documents to a UDDI repository in addition to the WSDL repository.

- Universal Description, Discovery, and Integration (UDDI) repositories.

Services published to UDDI repositories are available to other PeopleSoft and external systems. If another PeopleSoft system wants to invoke an exported service from UDDI, it can consume the WSDL document from the UDDI reference into its system to create a service and routing definition.

UDDI Repositories and Endpoints

When publishing a WSDL document to a UDDI repository, the PeopleSoft system publishes the current endpoint value defined in the Target Location field in the Service Configuration page.

The endpoint value in the actual WSDL document is a dynamic one, since you can change the target location value, for example, when you move from development to production.

If you change the target location you should change the endpoints of previously published WSDL documents, either manually in the UDDI registry or by republishing the WSDL documents to your UDDI repository using the changed endpoint.

WSDL URL Formats

After you publish a WSDL document using the Provide Web Service wizard, the system displays a WSDL URL. The URL provided is the path to the WSDL document location in the WSDL repository in

the PeopleSoft Pure Internet Architecture. The URL is used by external systems that will be invoking a PeopleSoft service.

The default URL format is path style. The following example shows a WSDL URL in path format:

```
http://localhost/PSIGW.war/PeopleSoftServiceListeningConnector/PT_WORKLIST.1.wsdl
```

The path style URL is generated by appending the WSDL document name to the target location value specified in the Service Configuration page.

PeopleSoft Integration Broker also supports a query parameter format. The following example shows a WSDL URL in query parameter format:

```
http://PeopleSoftServiceListeningConnector?Operation=GetWSDL&wsdl=PT_WORKLIST.1
```

The query parameter style URL is generated by passing either the WSDL document name or service name.version or service alias.version as a query parameter.

PeopleSoft still supports the query parameter format, however path format is preferred. Note that if using query parameter format, manual intervention may be required if the schema target location is changed.

Provided WSDL Documents

Every WSDL document you generate using PeopleSoft Integration Broker is divided into sections. This section describes the WSDL document sections and provides an example of the WSDL template that the PeopleSoft system uses to generate WSDL, as well as example WSDL documents for each of the supported operation types.

Sections of Provided WSDL Documents

WSDL documents that you provide using PeopleSoft Integration Broker contain the following sections:

Section	WSDL 1.1 Description	WSDL 2.0 Description
<definitions>	Specifies the namespaces for the WSDL document, W3C XML Schema and SOAP. A unique namespace will be captured from the Service definition, which will be used to define the WSDL namespaces. The format of this namespace is as follows: <code>http://xmlns.oracle.com/Enterprise/<App Name>/<Service Name></code>. When a service is defined within an application database, the namespace field is defaulted to the service namespace defined on the Service Configuration page.	NA. The <description> element serves the same purpose in WSDL 2.0 documents. See <description>.

Section	WSDL 1.1 Description	WSDL 2.0 Description
<description>	NA. The <definitions> element serves the same purpose in WSDL 1.1 documents. See <definitions>.	Specifies the namespaces for the WSDL document, W3C XML Schema and SOAP. A unique namespace will be captured from the Service definition, which will be used to define the WSDL namespaces. The format of this namespace is as follows: <code>http://xmlns.oracle.com/Enterprise/<App Name>/<Service Name></code>. When a service is defined within an application database, the namespace field is defaulted to the service namespace defined on the Service Configuration page.
<partnerLinktype>	A partnerLinkType defines the role of services and the port Type.	No change from WSDL 1.1. See WSDL 1.1 description.
<types>	Captures the simple and complex types required by the schema of the request and response message definitions of the service operations. For services with component interface handlers, some of the system methods, such as Create and Get, will require complex message types resembling the structure of the component interface buffer.	No change from WSDL 1.1. See WSDL 1.1 description.
<message>	Defines the abstract messages required for the selected operations. The data types for these are obtained from the Types section of the WSDL document.	There are no <message> elements in WSDL2.0. Instead, the operations within the interface refer to the schema elements directly.
<portType>	Features a named set of abstract operations and the abstract messages involved. This section includes all operations of the service selected for export.	NA. See <interface>

Section	WSDL 1.1 Description	WSDL 2.0 Description
<interface>	NA See <portType>	WSDL 2.0 features an <interface> element that replaces the <portType> element in WSDL 1.1. Unlike the <portType> element in WSDL 1.1, the operations within the <interface> element do not point to messages, but instead point to the schema elements contained within the <types> element.
<binding>	Specifies the network protocol and data format of messages used for a specific port type. For providing web services PeopleSoft utilizes SOAP packaging and HTTP transport protocols. The data format of messages is the Document style format.	No change from WSDL 1.1. See WSDL 1.1 description.
<operation>	This is an abstract definition of a service operation, which specifies request/response/fault messages.	No change from WSDL 1.1. See WSDL 1.1 description.
<service>	A service groups together endpoints that implement a common interface.	No change from WSDL 1.1. See WSDL 1.1 description.
<port>	In WSDL 1.1 the <port> element contains the definition of the address to which the client should request the service. The <port> element also has reference to binding used by the service	NA. See <endpoint>.
<endpoint>	NA. See <port>.	In WSDL 2.0 the <port> element is replaced by the <endpoint> element. The location attribute of endpoint contains the definition of the address to which the client should request the service. The <endpoint> element also has reference to binding used by the service

Note: In WSDL documents generated by the PeopleSoft system, WS-Security policies are assigned to the bind operation section.

Example 1: WSDL Template

The following example is the WSDL document template that the PeopleSoft system uses when it generates WSDL documents. The elements in bold are WSDL document sections discussed in the previous section:

```

        definitions name="DefinitionsName"
targetNamespace="NamespaceURI"
xmlns:prefix="NamespaceURI"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.xmlsoap.org/wsdl/"
<plnk:partnerLinkType name="PartnerLinkTypeName">
  <!-- Provider Role -->
    <plnk:role name="ProviderRoleName">
      <plnk:portType name="ProviderPortTypeReference">
        </plnk:role>
      <!-- In case of Async Request/Response this role is also required -->
      <plnk:role name="RequestorRoleName">
        <plnk:portType name="CallbackPortTypeReference">
          </plnk:role>
        </plnk:partnerLinkType>
      </types>
      <!-- One or more schemas -->
    </types>
    <message name="MessageName">
      <part name="PartName" type="TypeNameReference"/>
    </message>
    <portType name="PortName">
      <operation name="OperationName">
        <input message="MessageNameReference"/>
        <output message="MessageNameReference"/>
        <fault message="MessageNameReference"/>
      </operation>
    </portType>
    <binding name="BindingName" type="PortNameReference">
      <soap:binding style="rpc|document"
        transport="http://schemas.xmlsoap.org/soap/http"/>
      <operation name="OperationName">
        <soap:operation soapAction="ActionValue"/>
        <input>
          <soap:body
            encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
            namespace="TargetNamespace"
            use="encoded"/>
          </input>
          <output>
            <soap:body
              encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
              namespace="TargetNamespace"
              use="encoded"/>
            </output>
          </operation>
        </binding>
        <service name="ServiceName">
          <port name="PortName" binding="BindingNameReference">
            <soap:address location="URL"/>
          </port>
        </service>
      </definitions>

```

Example 2: Synchronous WSDL Example

The following example shows a synchronous WSDL document provided by the PeopleSoft system:

```

<?xml version="1.0" ?>
<wsdl:definitions name="PT_WORKLIST.1"

```

```

targetNamespace="http://xml.namespace.oracle.com/services"
xmlns:GetWorklistEntryStatusRequest.v1="http://xmlns.oracle.com/
Enterprise/Tools/schemas/PT_WL_GET_INSTANCE_REQ_CONT.v1"
xmlns:GetWorklistEntryStatusResponse.v1="http://xmlns.oracle.com/
Enterprise/Tools/schemas/PT_WL_GET_INSTANCE_RESP_CONT.v1"
xmlns:OperationFault.V1="http://xmlns.oracle.com/schemas/Fault"
xmlns:plnk="http://schemas.xmlsoap.org/ws/2003/05/partner-link/"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" xmlns:tns="http:
//xml.namespace.oracle.com/services"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
xmlns:wsp="http://schemas.xmlsoap.org/ws/2002/12/policy">
<wsp:UsagePolicy wsdl:Required="true" />
<plnk:partnerLinkType name="PT_WORKLIST_PartnerLinkType">
  <plnk:role name="PT_WORKLIST_Provider">
    <plnk:portType name="tns:PT_WORKLIST_PortType" />
  </plnk:role>
</plnk:partnerLinkType>
<wsdl:types>
  <xsd:schema elementFormDefault="qualified"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/
schemas/PT_WL_GET_INSTANCE_REQ_CONT.v1" schemaLocation="Get
WorklistEntryStatusRequest.v1.xsd" />
    <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/
schemas/PT_WL_GET_INSTANCE_RESP_CONT.v1" schemaLocation="
GetWorklistEntryStatusResponse.v1.xsd" />
    <xsd:import namespace="http://xmlns.oracle.com/schemas/Fault"
    schemaLocation="OperationFault.V1.xsd" />
  </xsd:schema>
</wsdl:types>
<wsdl:message name="GetWorklistEntryStatusRequest.v1">
  <wsdl:part element="GetWorklistEntryStatusRequest.v1:GetWorklist
EntryStatusRequest" name="parameter" />
</wsdl:message>
<wsdl:message name="GetWorklistEntryStatusResponse.v1">
  <wsdl:part element="GetWorklistEntryStatusResponse.v1:GetWorklist
EntryStatusResponse" name="parameter" />
</wsdl:message>
<wsdl:message name="OperationFault.V1">
  <wsdl:part element="OperationFault.V1:OperationFault" name="parameter" />
</wsdl:message>
<wsdl:portType name="PT_WORKLIST_PortType">
<wsdl:operation name="GetWorklistEntryStatus">
  <wsdl:documentation>Get worklist keys and status</wsdl:documentation>
  <wsdl:input message="tns:GetWorklistEntryStatusRequest.v1" name=
  "GetWorklistEntryStatusRequest.v1" />
  <wsdl:output message="tns:GetWorklistEntryStatusResponse.v1" name=
  "GetWorklistEntryStatusResponse.v1" />
  <wsdl:fault message="tns:OperationFault.V1" name="OperationFault.V1" />
</wsdl:operation>
</wsdl:portType>
<wsdl:binding name="PT_WORKLIST_Binding" type="tns:PT_WORKLIST_PortType">
  <soap:binding style="document" transport="http://schemas.xmlsoap.org/
soap/http" />
  <wsdl:operation name="GetWorklistEntryStatus">
    <soap:operation soapAction="GetWorklistEntryStatus.V1" style=
    "document" />
  <wsp:Policy wsu:Id="UsernameTokenSecurityPolicyPasswordOptional"
    xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
wss-wssecurity-utility-1.0.xsd">
    <wsp:ExactlyOne>
      <wsp:All>
        <wsse:SecurityToken wsp:Usage="wsp:Required" xmlns:wsse="
        http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
          <wsse:TokenType>wsse:UserNameToken</wsse:TokenType>
          <Claims>
            <SubjectName MatchType="wsse:Exact" />
            <UsePassword wsp:Usage="wsp:Optional" />
          </Claims>
        </wsse:SecurityToken>

```

```

        </wsp:All>
        </wsp:ExactlyOne>
        </wsp:Policy>
        <wsdl:input name="GetWorklistEntryStatusRequest.v1">
            <soap:body encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
                use="literal" />
        </wsdl:input>
        <wsdl:output name="GetWorklistEntryStatusResponse.v1">
            <soap:body encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
                use="literal" />
        </wsdl:output>
        <wsdl:fault name="OperationFault.V1">
            <soap:fault encodingStyle="http://schemas.xmlsoap.org/soap/
                encoding/" name="OperationFault.V1" use="literal" />
        </wsdl:fault>
        </wsdl:operation>
    </wsdl:binding>
    <wsdl:service name="WorklistServices">
        <wsdl:documentation>Peopletools Worklist</wsdl:documentation>
        <wsdl:port binding="tns:PT_WORKLIST_Binding" name="PT_WORKLIST_Port">
            <soap:address location="http://sbandyop-pc/PSIGW.war/PeopleSoftService
                ListeningConnector" />
        </wsdl:port>
    </wsdl:service>
</wsdl:definitions>

```

Example 3: Asynchronous Request/Response WSDL Document

The following example shows an asynchronous request/response WSDL document provided by the PeopleSoft system:

```

<?xml version="1.0"?>
<wsdl:definitions name="PT_WORKLIST.1"
    targetNamespace="http://xml.namespace.oracle.com/services"
    xmlns:CreateWorklistEntryRequest.v1="http://xmlns.oracle.com/Enterprise/
        Tools/schemas/PT_WL_CREATE_REQUEST_CONT.v1"
    xmlns:CreateWorklistEntryResponse.v1="http://xmlns.oracle.com/Enterprise/
        Tools/schemas/PT_WL_CREATE_RESPONSE_CONT.v1"
    xmlns:plnk="http://schemas.xmlsoap.org/ws/2003/05/partner-link/"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" xmlns:tns="http://xml.
        namespace.oracle.com/services" xmlns:wsa="http://schemas.xmlsoap.org/ws/
        2003/03/addressing"
    xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
    xmlns:wsp="http://schemas.xmlsoap.org/ws/2002/12/policy">
    <wsp:UsagePolicy wsdl:Required="true"/>
    <plnk:partnerLinkType name="PT_WORKLIST_PartnerLinkType">
        <plnk:role name="PT_WORKLIST_Provider">
            <plnk:portType name="tns:PT_WORKLIST_PortType"/>
        </plnk:role>
        <plnk:role name="PT_WORKLIST_Requester">
            <plnk:portType name="tns:PT_WORKLIST_CallbackPortType"/>
        </plnk:role>
    </plnk:partnerLinkType>
    <wsdl:types>
        <xsd:schema elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/
            2001/XMLSchema">
            <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/
                schemas/PT_WL_CREATE_REQUEST_CONT.v1" schemaLocation="CreateWorklist
                EntryRequest.v1.xsd"/>
            <xsd:import namespace="http://xmlns.oracle.com/Enterprise/Tools/
                schemas/PT_WL_CREATE_RESPONSE_CONT.v1" schemaLocation="CreateWorklist
                EntryResponse.v1.xsd"/>
            <xsd:import namespace="http://schemas.xmlsoap.org/ws/2003/03/
                addressing" schemaLocation="http://schemas.xmlsoap.org/ws/2003/
                03/addressing"/>
        </xsd:schema>
    </wsdl:types>
    <wsdl:message name="CreateWorklistEntryRequest.v1">
        <wsdl:documentation>Create worklist item Request</wsdl:documentation>
    </wsdl:message>

```

```

    <wsdl:part element="CreateWorklistEntryRequest.v1:CreateWorklist
      EntryRequest" name="parameter"/>
  </wsdl:message>
  <wsdl:message name="CreateWorklistEntryResponse.v1">
    <wsdl:part element="CreateWorklistEntryResponse.v1:CreateWorklist
      EntryResponse" name="parameter"/>
  </wsdl:message>
  <wsdl:message name="InitiateHeader">
    <wsdl:documentation>SOAP Header message for correlating Asynchronous
      callback</wsdl:documentation>
    <wsdl:part element="wsa:MessageID" name="MessageID"/>
    <wsdl:part element="wsa:ReplyTo" name="ReplyTo"/>
  </wsdl:message>
  <wsdl:message name="CallbackHeader">
    <wsdl:documentation>SOAP Header message for callback Asynchronous
      operation</wsdl:documentation>
    <wsdl:part element="wsa:RelatesTo" name="RelatesTo"/>
  </wsdl:message>
  <wsdl:portType name="PT_WORKLIST_PortType">
    <wsdl:operation name="CreateWorklistEntry">
      <wsdl:documentation>Create worklist Entry. This is the Request Operation
        in a Asynchronous Request/Response pair. Callback Operation :
        CreateWorklistEntry_CALLBACK</wsdl:documentation>
      <wsdl:input message="tns:CreateWorklistEntryRequest.v1" name="
        CreateWorklistEntryRequest.v1"/>
    </wsdl:operation>
  </wsdl:portType>
  <wsdl:portType name="PT_WORKLIST_CallbackPortType">
    <wsdl:operation name="CreateWorklistEntry_CALLBACK">
      <wsdl:documentation>Create worklist Entry - Callback. This is the
        Callback Operation in a Asynchronous Request/Response pair.
      </wsdl:documentation>
      <wsdl:input message="tns:CreateWorklistEntryResponse.v1" name="
        CreateWorklistEntryResponse.v1"/>
    </wsdl:operation>
  </wsdl:portType>
  <wsdl:binding name="PT_WORKLIST_Binding" type="tns:PT_WORKLIST_PortType">
    <soap:binding style="document" transport="http://schemas.xmlsoap.
      org/soap/http"/>
    <wsdl:operation name="CreateWorklistEntry">
      <soap:operation soapAction="CreateWorklistEntry.V1" style="document"/>
      <wsp:Policy wsu:Id="UsernameTokenSecurityPolicyPasswordOptional"
        xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-utility-1.0.xsd">
        <wsp:ExactlyOne>
          <wsp:All>
            <wsse:SecurityToken wsp:Usage="wsp:Required" xmlns:wsse=
              "http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
              wssecurity-secext-1.0.xsd">
              <wsse:TokenType>wsse:UserNameToken</wsse:TokenType>
              <Claims>
                <SubjectName MatchType="wsse:Exact"/>
                <UsePassword wsp:Usage="wsp:Optional"/>
              </Claims>
            </wsse:SecurityToken>
          </wsp:All>
        </wsp:ExactlyOne>
      </wsp:Policy>
      <wsdl:input name="CreateWorklistEntryRequest.v1">
        <soap:header encodingStyle="" message="tns:InitiateHeader" part=
          "MessageID" use="literal" wsdl:required="false"/>
        <soap:header encodingStyle="" message="tns:InitiateHeader" part=
          "ReplyTo" use="literal" wsdl:required="false"/>
        <soap:body encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
          use="literal"/>
      </wsdl:input>
    </wsdl:operation>
  </wsdl:binding>
  <wsdl:binding name="PT_WORKLIST_CallbackBinding" type="tns:
    PT_WORKLIST_CallbackPortType">

```

```

<soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
<wsdl:operation name="CreateWorklistEntry_CALLBACK">
  <soap:operation soapAction="CreateWorklistEntry_CALLBACK.V1" style="document"/>
  <wsp:Policy wsu:Id="UsernameTokenSecurityPolicyPasswordOptional"
    xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
    <wsp:ExactlyOne>
      <wsp:All>
        <wsse:SecurityToken wsp:Usage="wsp:Required" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd">
          <wsse:TokenType>wsse:UserNameToken</wsse:TokenType>
          <Claims>
            <SubjectName MatchType="wsse:Exact"/>
            <UsePassword wsp:Usage="wsp:Optional"/>
          </Claims>
        </wsse:SecurityToken>
      </wsp:All>
    </wsp:ExactlyOne>
  </wsp:Policy>
  <wsdl:input name="CreateWorklistEntryResponse.v1">
    <soap:header encodingStyle="" message="tns:CallbackHeader"
      part="RelatesTo" use="literal" wsdl:required="true"/>
    <soap:body encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
      use="literal"/>
  </wsdl:input>
</wsdl:operation>
</wsdl:binding>
<wsdl:service name="WorklistServices">
  <wsdl:documentation>Peopletools Worklist</wsdl:documentation>
  <wsdl:port binding="tns:PT_WORKLIST_Binding" name="PT_WORKLIST_Port">
    <soap:address location="http://ORACLE_ENDPOINT"/>
  </wsdl:port>
</wsdl:service>
<wsdl:service name="WorklistServices_Callback">
  <wsdl:documentation>Peopletools Worklist - Callback</wsdl:documentation>
  <wsdl:port binding="tns:PT_WORKLIST_CallbackBinding" name="PT_WORKLIST_Callback_Port">
    <soap:address location="http://Client.EndPoint.Set.By.Caller"/>
  </wsdl:port>
</wsdl:service>
</wsdl:definitions>

```

Example 4: Asynchronous One-Way WSDL Document

The following example shows an asynchronous one-way WSDL document provided by the PeopleSoft system:

```

<?xml version="1.0" ?>
<wsdl:definitions name="QEPC_FLO_MSG.1" targetNamespace="http://xmlns.oracle.com/Enterprise/Tools/services/QEPC_FLO_MSG.1"
  xmlns:QEPC_FLO_MSG="http://xmlns.oracle.com/Enterprise/Tools/schemas/QEPC_FLO_MSG.VERSION_1" xmlns:plnk="http://schemas.xmlsoap.org/ws/2003/05/partner-link/"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" xmlns:tns="http://xmlns.oracle.com/Enterprise/Tools/services/QEPC_FLO_MSG.1"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
  xmlns:wsp="http://schemas.xmlsoap.org/ws/2002/12/policy">
  <wsp:UsagePolicy wsdl:Required="true" />
  <plnk:partnerLinkType name="QEPC_FLO_MSG_PartnerLinkType">
    <plnk:role name="QEPC_FLO_MSG_Provider">
      <plnk:portType name="tns:QEPC_FLO_MSG_PortType" />
    </plnk:role>
  </plnk:partnerLinkType>
  <wsdl:types>
    <xsd:schema elementFormDefault="qualified"
      targetNamespace="http://xmlns.oracle.com/Enterprise/Tools/schemas/

```

```

    QEPC_FLO_MSG.VERSION_1"
    xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/
    QEPC_FLO_MSG.VERSION_1"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:element name="QEPC_FLO_MSG" type="xsd:string" />
  </xsd:schema>
</wsdl:types>
<wsdl:message name="QEPC_FLO_MSG.VERSION_1">
  <wsdl:part element="QEPC_FLO_MSG.VERSION_1:QEPC_FLO_MSG" name=
    "parameter" />
</wsdl:message>
<wsdl:portType name="QEPC_FLO_MSG_PortType">
<wsdl:operation name="QEPC_FLO_MSG">
  <wsdl:documentation>Test</wsdl:documentation>
  <wsdl:input message="tns:QEPC_FLO_MSG.VERSION_1" name="QEPC_FLO_
    MSG.VERSION_1" />
</wsdl:operation>
</wsdl:portType>
<wsdl:binding name="QEPC_FLO_MSG_Binding" type="tns:QEPC_FLO_MSG_
  PortType">
  <soap:binding style="document" transport="http://schemas.xmlsoap.
    org/soap/http" />
<wsdl:operation name="QEPC_FLO_MSG">
  <soap:operation soapAction="QEPC_FLO_MSG.v1" style="document" />
  <wsp:Policy wsu:Id="UsernameTokenSecurityPolicyPasswordOptional"
    xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
      wss-wssecurity-utility-1.0.xsd">
    <wsp:ExactlyOne>
      <wsp:All>
        <wsse:SecurityToken wsp:Usage="wsp:Required" xmlns:wsse="
          http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
            wssecurity-secext-1.0.xsd">
          <wsse:TokenType>wsse:UserNameToken</wsse:TokenType>
          <Claims>
            <SubjectName MatchType="wsse:Exact" />
            <UsePassword wsp:Usage="wsp:Optional" />
          </Claims>
          </wsse:SecurityToken>
        </wsp:All>
      </wsp:ExactlyOne>
    </wsp:Policy>
    <wsdl:input name="QEPC_FLO_MSG.VERSION_1">
      <soap:body encodingStyle="http://schemas.xmlsoap.org/soap/
        encoding/" use="literal" />
    </wsdl:input>
  </wsdl:operation>
</wsdl:binding>
<wsdl:service name="QEPC_FLO_MSG">
  <wsdl:documentation>File Utilities Test</wsdl:documentation>
  <wsdl:port binding="tns:QEPC_FLO_MSG_Binding" name="QEPC_FLO_MSG_Port">
    <soap:address location="http://sbandyop-pc/PSIGW.war/PeopleSoft
      ServiceListeningConnector" />
  </wsdl:port>
</wsdl:service>
</wsdl:definitions>

```

PartnerLinkType Support

A service may play a single or dual role in a partnership with a business process.

In a one-way partnership the service may play a single role of provider, whereas in a two-way partnership the service may play the roles of a provider as well as a requester (for callbacks).

A service may participate in different types of partnerships with a process or another service. In each of these partnerships, the service may play a single or dual role. This type of partnership is termed as a PartnerLinkType.

PartnerLinkType Structure

To ease the task of process developers consuming PeopleSoft services, a basic PartnerLinkType structure is provided in the PeopleSoft-provided WSDL. Process developers may or may not choose to use this PartnerLinkType structure.

The following table describes details of the PartnerLinkType structure for each service operation type:

Operation Type	PartnerLinkType Description
Synchronous	The PartnerLinkType has a single Provider role.
Asynchronous one-way	The PartnerLinkType has a single Provider role.
Asynchronous Request/Response	The PartnerLinkType has two roles for the Provider portType and the Requester Callback portType.

The following sections feature examples of the PartnerLinkType structures the PeopleSoft system generates for each service operation type.

Example 1: Synchronous PartnerLinkType Structure

The following example shows the PartnerLinkType structure that the PeopleSoft system generates for an inbound synchronous service operation:

```
<portType name="HelloWorldSync">
  <operation name="process">
    <input message="client:HelloWorldSyncRequestMessage"/>
    <output message="client:HelloWorldSyncResponseMessage"/>
  </operation>
</portType>

<plnk:partnerLinkType name="HelloWorldSyncPLType">
  <plnk:role name="HelloWorldSyncProvider">
    <plnk:portType name="wsdl_target:HelloWorldSync"/>
  </plnk:role>
</plnk:partnerLinkType>
```

Example 2: Asynchronous One-Way PartnerLinkType Structure

The following example shows the PartnerLinkType structure that the PeopleSoft system generates for an inbound asynchronous one-way service operation.

```
<portType name="UpdateOrderAsync">
  <operation name="UpdateOrder">
    <input message="client:OrderRequestMessage"/>
  </operation>
</portType>

<plnk:partnerLinkType name="UpdateOrderAsyncPLType">
  <plnk:role name="UpdateOrderAsyncProvider">
    <plnk:portType name="wsdl_target:UpdateOrderAsync"/>
  </plnk:role>
</plnk:partnerLinkType>
```

Example 3: Asynchronous Request/Response PartnerLinkType Structure

The following example shows the PartnerLinkType structure that the PeopleSoft system generates for an inbound asynchronous request/response service operation:

```
<!--
  PortType definition
-->

  <!-- portType implemented by the QuoteConsumer PeopleSoft service -->
  <portType name="QuoteConsumer">
    <operation name="GetQuote">
      <input message="tns:QuoteConsumerRequestMessage"/>
    </operation>
  </portType>

  <!-- portType implemented by the requester of QuoteConsumer PeopleSoft service
  for asynchronous callback purposes
  -->
  <portType name="QuoteConsumerCallback">
    <operation name="GetQuoteCallback">
      <input message="tns:QuoteConsumerResultMessage"/>
    </operation>
  </portType> <!--
  PartnerLinkType definition
-->

  <!-- the QuoteConsumer partnerLinkType binds the service and
  requestor portType into an asynchronous conversation.
  -->
  <plnk:partnerLinkType name="QuoteConsumerPLType">
    <plnk:role name="QuoteConsumerProvider">
      <plnk:portType name="wsdl_target:QuoteConsumer"/>
    </plnk:role>
    <plnk:role name="QuoteConsumerRequester">
      <plnk:portType name="wsdl_target:QuoteConsumerCallback"/>
    </plnk:role>
  </plnk:partnerLinkType>
</definitions>
```

Understanding WADL Documents

This section discusses WADL documents.

Supported Operation Types for WADL Documents

PeopleSoft Integration Broker provides WADL documents for REST services only. REST services are synchronous service operations.

Locations for Publishing WADL Documents

Using the Provide Web Service wizard, you can publish WADL documents to the PeopleSoft WSDL repository in the PeopleTools database.

You can access a WADL document in the WSDL Repository using the Services component or by using the URL generated by the Provide Web Service Wizard when you provide a REST service.

Related Links

[Accessing Generated Web Service Documents](#)

WADL URL Format

After you publish a WADL document using the Provide Web Service wizard, the system displays a WADL URL. The URL provided is the path to the WADL document in the WSDL repository in the PeopleSoft Pure Internet Architecture. The URL is used by external systems that will be invoking a PeopleSoft service.

The WADL URL format is path style. The following example shows a WADL URL in path format where the service provided is *QE_WEATHERSTATION*:

```
http://<machine>:<port>/PSIGW/RESTListeningConnector/QE_WEATHERSTATION.1.wadl
```

Provided WADL Documents

Every WADL document you generate using PeopleSoft Integration Broker is divided into sections. This section describes the WADL document sections and provides an example of a WADL document generated by the system.

The following example shows a WADL document provided by the PeopleSoft system:

```
<?xml version="1.0"?>
<application xmlns="http://wadl.dev.java.net/2009/02" xmlns:QE_FLIGHTPLAN_SYNC.VERSION_1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_FLIGHTPLAN_SYNC.VERSION_1" xmlns:QE_WEATHERDATA.v1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_WEATHERDATA.v1" xmlns:QE_WEATHER_FAULT.v1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_Weather.QE_Weather_Fault.v1" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <grammars>
    <include href="QE_WEATHERDATA.v1.xsd"/>
    <include href="QE_WEATHER_FAULT.v1.xsd"/>
    <include href="QE_FLIGHTPLAN_SYNC.VERSION_1.xsd"/>
  </grammars>
  <resources base="http://ORACLE_ENDPOINT">
    <resource uri="WeatherStation.v1">
      <method href="#GETWeatherStation.v1"/>
      <method href="#HEADWeatherStation.v1"/>
      <method href="#POSTWeatherStation.v1"/>
      <method href="#PUTWeatherStation.v1"/>
      <method href="#PATCHWeatherStation.v1"/>
      <method href="#DELETEWeatherStation.v1"/>
    </resource>
  </resources>
  <method id="DELETEWeatherStation.v1" name="DELETE">
    <request>
      <resource path="weather/{state}/{city}?forecast={day}">
        <param name="state" required="true" style="template" type="xsd:string"/>
        <param name="city" required="true" style="template" type="xsd:string"/>
        <param name="day" required="true" style="template" type="xsd:string"/>
      </resource>
      <resource path="weather/{state}/{city}">
        <param name="state" required="true" style="template" type="xsd:string"/>
        <param name="city" required="true" style="template" type="xsd:string"/>
      </resource>
      <resource path="weather/{state}">
```

```

        <param name="state" required="true" style="template" type="xsd:string"/>
    </resource>
</request>
<response status="200">
    <representation element="QE_WEATHERDATA.v1:WeatherInfo" id="QE_WEATHERDATA.v1">
        .xsd" mediaType="text/xml"/>
    </response>
</method>
<method id="GETWeatherStation.v1" name="GET">
    <request>
        <resource path="weather/{state}/{city}?forecast={day}">
            <param name="state" required="true" style="template" type="xsd:string"/>
            <param name="city" required="true" style="template" type="xsd:string"/>
            <param name="day" required="true" style="template" type="xsd:string"/>
        </resource>
        <resource path="weather/{state}/{city}">
            <param name="state" required="true" style="template" type="xsd:string"/>
            <param name="city" required="true" style="template" type="xsd:string"/>
        </resource>
        <resource path="weather/{state}">
            <param name="state" required="true" style="template" type="xsd:string"/>
        </resource>
        <resource path="weather/{country}/{state}/{city}?forecast={day}">
            <param name="country" required="true" style="template" type="xsd:string"/>
            <param name="state" required="true" style="template" type="xsd:string"/>
            <param name="city" required="true" style="template" type="xsd:string"/>
            <param name="day" required="true" style="template" type="xsd:string"/>
        </resource>
        <param name="Accept-Charset" style="header" type="xsd:string">
            <doc xml:lang="ENG">Character sets that are acceptable: utf-8</doc>
        </param>
        <param name="Accept-Language" style="header" type="xsd:string">
            <doc xml:lang="ENG">Acceptable languages for response en-US</doc>
        </param>
        <param name="If-Modified-Since" style="header" type="xsd:string">
            <doc xml:lang="ENG">Allows a 304 Not Modified to be returned if content is =>
unchanged</doc>
        </param>
    </request>
    <response status="200">
        <representation element="QE_WEATHERDATA.v1:WeatherInfo" id="QE_WEATHERDATA.v1">
            .xsd" mediaType="text/xml"/>
            <param name="Allow" style="header" type="xsd:string">
                <doc xml:lang="ENG">Valid actions for a specified resource.</doc>
            </param>
            <param name="Content-Language" style="header" type="xsd:string">
                <doc xml:lang="ENG">The language the content is in</doc>
            </param>
            <param name="Content-Type" style="header" type="xsd:string"/>
            <param name="Date" style="header" type="xsd:string">
                <doc xml:lang="ENG">The date and time that the message was sent</doc>
            </param>
            <param name="Expires" style="header" type="xsd:string">
                <doc xml:lang="ENG">Gives the date/time after which the response is conside=>
red stale</doc>
            </param>
            <param name="Host" style="header" type="xsd:string">
                <doc xml:lang="ENG">Transaction Server</doc>
            </param>
            <param name="Transfer-Encoding" style="header" type="xsd:string"/>
            <param name="Warning" style="header" type="xsd:string">
                <doc xml:lang="ENG">A general warning about possible problems with the enti=>
ty body.</doc>
            </param>
        </response>
    </response status="400">

```

```

    <representation element="QE_Weather_Fault" id="QE_WEATHERDATA.v1.xsd" mediaTy⇒
pe="text/xml"/>
    <param name="Allow" style="header" type="xsd:string">
      <doc xml:lang="ENG">Valid actions for a specified resource.</doc>
    </param>
    <param name="Content-Language" style="header" type="xsd:string">
      <doc xml:lang="ENG">The language the content is in</doc>
    </param>
    <param name="Content-Type" style="header" type="xsd:string"/>
    <param name="Date" style="header" type="xsd:string">
      <doc xml:lang="ENG">The date and time that the message was sent</doc>
    </param>
    <param name="Expires" style="header" type="xsd:string">
      <doc xml:lang="ENG">Gives the date/time after which the response is conside⇒
red stale</doc>
    </param>
    <param name="Host" style="header" type="xsd:string">
      <doc xml:lang="ENG">Transaction Server</doc>
    </param>
    <param name="Transfer-Encoding" style="header" type="xsd:string"/>
    <param name="Warning" style="header" type="xsd:string">
      <doc xml:lang="ENG">A general warning about possible problems with the enti⇒
ty body.</doc>
    </param>
  </response>
</method>
<method id="HEADWeatherStation.v1" name="HEAD">
  <request>
    <resource path="weather/{state}/{city}?forecast={day}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
      <param name="day" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}/{city}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}">
      <param name="state" required="true" style="template" type="xsd:string"/>
    </resource>
    <param name="Accept-Charset" style="header" type="xsd:string">
      <doc xml:lang="ENG">Character sets that are acceptable: utf-8</doc>
    </param>
    <param name="Accept-Language" style="header" type="xsd:string">
      <doc xml:lang="ENG">Acceptable languages for response en-US</doc>
    </param>
    <param name="If-Modified-Since" style="header" type="xsd:string">
      <doc xml:lang="ENG">Allows a 304 Not Modified to be returned if content is ⇒
unchanged</doc>
    </param>
  </request>
</method>
<method id="POSTWeatherStation.v1" name="POST">
  <request>
    <resource path="weather/{state}/{city}?forecast={day}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
      <param name="day" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}/{city}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}">
      <param name="state" required="true" style="template" type="xsd:string"/>
    </resource>
    <representation element="QE_FLIGHTPLAN_SYNC.VERSION_1:QE_FLIGHTPLAN_SYNC" id⇒

```

```

"QE_FLIGHTPLAN_SYNC.VERSION_1.xsd" mediaType="text/xml"/>
  </request>
  <response status="201">
    <representation element="QE_WEATHERDATA.v1:WeatherInfo" id="QE_WEATHERDATA.v1⇒
.xsd" mediaType="text/xml"/>
  </response>
  <response status="400">
    <representation element="QE_Weather_Fault" id="QE_WEATHERDATA.v1.xsd" mediaTy⇒
pe="text/xml"/>
  </response>
</method>
<method id="PUTWeatherStation.v1" name="PUT">
  <request>
    <resource path="weather/{state}/{city}?forecast={day}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
      <param name="day" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}/{city}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}">
      <param name="state" required="true" style="template" type="xsd:string"/>
    </resource>
    <representation element="QE_FLIGHTPLAN_SYNC.VERSION_1:QE_FLIGHTPLAN_SYNC" id⇒
"QE_FLIGHTPLAN_SYNC.VERSION_1.xsd" mediaType="text/xml"/>
  </request>
  <response status="200">
    <representation element="QE_WEATHERDATA.v1:WeatherInfo" id="QE_WEATHERDATA.v1⇒
.xsd" mediaType="text/xml"/>
  </response>
</method>
<method id="PATCHWeatherStation.v1" name="PATCH">
  <request>
    <resource path="weather/{state}/{city}?forecast={day}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
      <param name="day" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}/{city}">
      <param name="state" required="true" style="template" type="xsd:string"/>
      <param name="city" required="true" style="template" type="xsd:string"/>
    </resource>
    <resource path="weather/{state}">
      <param name="state" required="true" style="template" type="xsd:string"/>
    </resource>
    <representation element="QE_FLIGHTPLAN_SYNC.VERSION_1:QE_FLIGHTPLAN_SYNC" id⇒
"QE_FLIGHTPLAN_SYNC.VERSION_1.xsd" mediaType="text/xml"/>
  </request>
  <response status="200">
    <representation element="QE_WEATHERDATA.v1:WeatherInfo" id="QE_WEATHERDATA.v1⇒
.xsd" mediaType="text/xml"/>
  </response>
  <response status="402">
    <representation element="QE_Weather_Fault" id="QE_WEATHERDATA.v1.xsd" mediaTy⇒
pe="text/xml"/>
  </response>
</method>
</application>

```

WSDL Document and WADL Document Versioning

When the Service System Status in the Service Configuration page is set to *Production* and you attempt to regenerate a WSDL document or a WADL document for a service, PeopleSoft Integration Broker versions and stores the WSDL document or WADL document in the WSDL repository under the following condition: You have previously generated a WSDL document or a WADL document for the same service and new service operations have been added that you selected to include in the new WSDL document or WADL document.

In this case, the system appends a version number to the service namespace to enable unique qualification of elements and attributes in the new document version. The new version number is also appended to the document name. The latest document version is marked as *Default* in the WSDL repository.

When the Service System Status in the Service Configuration page is set to *Development* and you regenerate a WSDL document or a WADL document for a service, any existing document in the repository is overwritten.

Multiple WSDL or WADL versions generated from the same service display in a grid on the Services page and include a timestamp and version for each generated document. Only one of these can be the default version.

Related Links

“Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration)

[Viewing WSDL Documents Generated for Services](#)

Understanding OpenAPI Documents

PeopleSoft Integration Broker provides OpenAPI documents for OpenAPI REST services. OpenAPI REST Services are synchronous service operations.

Locations for Publishing OpenAPI Documents

Using the Provide Web Service wizard, you can publish OpenAPI documents to the PeopleSoft WSDL repository in the PeopleTools database.

You can access an OpenAPI document in the WSDL Repository using the Services component or by using the URL generated by the Provide Web Service Wizard when you provide an OpenAPI REST service.

OpenAPI URL Format

After you publish a OpenAPI document using the Provide Web Service wizard, the system displays a OpenAPI URL. The URL provided is the path to the OpenAPI document in the WSDL repository in the PeopleSoft Pure Internet Architecture. The URL is used by external systems that will be invoking a PeopleSoft service.

The OpenAPI URL format is path style. The following example shows a OpenAPI URL in path format where the service provided is *FLIGHT_INFORMATION*:

```
http://<machine>:<port>/PSIGW/RESTListeningConnector/node/FLIGHT_INFORMATION.1.api
```

Prerequisites for Providing Services

The following prerequisites exist for providing services:

- The PeopleSoft system must be configured for handling services. Use the Service Configuration page to define the service namespace, schema namespace, target location and service system status.
- If publishing services to a UDDI repository you must:

Note: You can only publish WSDL documents to a UDDI repository.

- Have the UDDI server set up, configured and running.
 - Have business entities and categories set up on the UDDI server that you intent to query from the Provide Web Service wizard.
 - Specify the UDDI server and other relevant information within the PeopleSoft system using the Service Configuration-UDDI Configuration page.
-
- Service operations in services to provide must have any-to-local routing definitions defined.
 - There must be a minimum of one service operation associated with the service that you select for which to generate a WSDL, WADL, or OpenAPI document.
 - For services that contain service operations with nonrowset-based messages, schemas must exist. The message schema must contain a target namespace. If no target namespace exists an error will occur when the system attempts to generate the WSDL or WADL document.

Note: Target namespace is not required for OpenAPI document.

PeopleSoft automatically generates schema for services that contain operations with rowset-based messages.

Related Links

“Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration)

“Understanding Specifying UDDI Repositories in PeopleSoft Systems” (Integration Broker Administration)

[Understanding Routing Definitions](#)

[Understanding Managing Service Operations](#)

[Understanding the Message Schema Builder](#)

Common Elements Used to Provide Services

<i>Field or Control</i>	<i>Description</i>
Description	Description of the service, service operation or WSDL source.
Fault Message	Name of the fault message. Depending on how generated, the name of the fault message can include the version in the following format: <i>MessageName.Version</i> .
Operation Type and Operation	Type of service operation. See Services Operation Types .
Request Message	Name and version of the request message in the following format: <i>MessageName.Version</i> .
Response Message	Name and version of the response message in the following format: <i>MessageName.Version</i> .
Routing External Alias	External Alias from the routing definition for a service operation. Unless overridden, defaults to the format <i>OperationAlias.Version</i> .
Select	Select the box to select the WSDL or WADL.
Service	Name of the service that contains the service operations to include in the generated WSDL, WADL or OpenAPI documents.
Service Operation	Name of the service operation for which to generate WSDL, WADL or OpenAPI documents.

Providing Non-REST Web Services

The Provide Web Services component (IB_WSDLEXP_SRCH) features a wizard you can use to provide web services. This section focuses on providing non-REST web Services.

A non-REST service will produce a WSDL document.

Note: For a service to be available to provide, an any-to-local routing must exist for the service. In addition, there must be a minimum of one service operation associated with the service. You can use the Provide Web Service wizard to select one or more services for which to generate documents. A separate document is generated for each service.

Step 1: Select Services

The first step is to search for and select the services that contain the service operations to include the WSDL documents that you generate. To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

This example illustrates the Provide Web Services - Select Services page.

Provide Web Services

1

2

3

4

Step 1 of 4

Next >

Select Services

Enter search criteria and click Search. Select one or more services you would like to provide.

Search Criteria

Service Name

begins with

Description

begins with

Object Owner ID

equals

☐ REST Service

You can search by the full or partial service name and service description. You can also search by object owner ID, if one is defined for the service. You can enter one or more of these criteria when performing your search.

Field or Control	Description
Service Name	Enter a full or partial service name.
Description	Enter the full or partial description of the service.
Object Owner ID	Select the object owner of the service to provide.
REST Service	Make sure this box is cleared for a non-REST Service.

Click the **Search** button.

Select the check box next to each name of the services to provide.

Click the **Next** button to proceed to the next step in the wizard, selecting service operations.

Step 2: Select Service Operations

Use the Select Service Operations page (IB_WSDL_EXP_OPER) of the Provide Web Service Wizard to select service operations to provide.

This example illustrates the Select Service Operations page for a non-REST service.

Provide Web Services

New Window | Help | Personalize Page

1234

Step 2 of 4

< PreviousNext >

Select Service Operations

Select one or more operations for each service.

ServiceQE_PO

☐ Use Service Alias in WSDL

☐ Use Secure Target Location

DescriptionQE Purchase Order

☐ Generate WSDL 2.0

Operations

<>1-1 of 1>>View All

Service Operation	Description	Operation Type	Request Message	Response Message	Fault Message
☒ QE_PO_ASYNC.V1	QE_PO_ASYNC	Asynchronous - One Way	QE_PO_MSG.VERSION_1	.	.

Field or Control	Description
Use Service Alias in WSDL	Select this checkbox to specify that the system use the service alias name in the generated WSDL, rather than the actual service name.
Use Secure Target Location	Select this checkbox if you want to export the WSDL to the URL specified in the Secure Target Location field on the Service Configuration page. If you do not select this option, WSDL is exported to the URL specified in the Target Location field defined on the Service Configuration page.
Generate WSDL 2.0	By default, the system generates WSDL in WSDL 1.1 format. Select this checkbox to generate WSDL in WSDL 2.0 format.

If you are attempting to provide a different version of an existing WSDL document, the **Service System Status** mode set, *Production* or *Development*, may impact your results.

See [WSDL Document and WADL Document Versioning](#).

Click the **Next** button to proceed to the next step in the wizard.

Step 3 View WSDL

Use the View WSDL page (IB_WSDLEXP_PVIEW) to preview the WSDL.

This example illustrates the View WSDL page for a non-REST service.

Provide Web Services

1

2

3

4

Step 3 of 4

< Previous

Next >

View WSDL

View the generated WSDL for each service.

Selected Services

|< < 1-1 of 1 > >|

Service	Description	
QE_PO	QE Purchase Order	View WSDL

Each service for which a WSDL document will be generated is listed. Click the **View WSDL** link to view the WSDL document for each service that you have selected.

This example illustrates the WSDL Viewer page. The example shows generated WSDL for the QE_PO service.



Click the **Return** button to return to the View WSDL page.

Click the **Next** button to proceed to the next step in the wizard.

Step 4: Specify Publishing Options

After you preview the WSDL document, use the Specify Publishing Options page (IB_WSDLEXP_LOC) to specify the publish location of the generated documents.

This example illustrates the Specify Publishing Options page.

Provide Web Services

Step 4 of 4

1 2 3 4

Specify Publishing Options

The WSDL for the selected services will be published to the PeopleSoft WSDL Repository.

☐ Publish to UDDI

☒ WSDL Repository

< Previous Finish

By default the system publishes WSDL documents to the PeopleSoft WSDL repository.

Select the **Publish to UDDI** check box to publish the WSDL to a UDDI repository in addition to the PeopleSoft WSDL repository.

Providing WSDL Documents to UDDI Repositories

Before providing a WSDL document to a UDDI repository, you must configure the UDDI repository in the PeopleSoft system.

See “Understanding Specifying UDDI Repositories in PeopleSoft Systems” (Integration Broker Administration).

When you select the **Publish to UDDI** check box, the **Select UDDI Servers** box appears where you specify the UDDI repository to which to publish the WSDL.

This example show the Specify Publishing Options page when Publish to UDDI is selected.

Provide Web Services

1

2

3

4

Step 4 of 4

< Previous

Finish

Specify Publishing Options

The WSDL for the selected services will be published to the PeopleSoft WSDL Repository.

☒ Publish to UDDI

Select UDDI Servers

1 of 1

View All

*UDDI Name:

+

-

Get Business Entities

Select Business Entity

1-1 of 1

Select	Business Entity Name
☐	

Select UDDI Categories

1-1 of 1

UDDI Category Name		UDDI Category Value		
	Q		+	-

☒ WSDL Repository

To provide a WSDL document to a UDDI repository:

1. From the **UDDI Name** drop-down list box, select the UDDI server to which you are publishing the WSDL.
2. Click the **Get Bus. Entities** button.

The Select Business Entity section lists the business entities that are available to select for the UDDI server.

3. Select the check box next to each business entity name to include.
4. Click the **UDDI Category Name** lookup button to display a list of UDDI categories and select a UDDI category. Click the **OK** button.

5. In the **Category Value** field, enter a value for the category.
6. To add additional categories, in the Select UDDI Categories section, click the Add a Row button (+) to add a row and repeat step 5 and step 6.
7. Click the **Finish** button.

The Results page appears and displays the WSDL generation log.

Step 5: View the WSDL Generation Log

Use the Confirm Results page (IB_WSDLEXP_RSLTS) to view the WSDL Generation Log:

This example illustrates the Confirm Results page for a non-REST service.

Provide Web Services

Confirm Results

View the WSDL Generation Log to confirm the results of the wizard.

WSDL Generation Log:

Service: QE_PO has been exported.

Inserted WSDL: QE_PO.1 in the repository

Generated WSDL URL:
http://<machine>:8000/PSIGW/PeopleSoftServiceListeningConnector/LOCAL/
QE_PO.1.wsdl

[Provide Another Service](#) [Generate SOAP Template](#)

The WSDL Generation Log provides the name of the services and URL for each WSDL document generated.

You can cut and paste the URL into a browser to access the document. You can also access the document using the WSDL repository.

To provide another service, click the **Provide Another Service** button and return to step 1 of the wizard.

When providing non-REST service operations, a **Generate SOAP Template** link appears on the page. Click the link to access the Generate SOAP utility to generate SOAP message templates for request messages, response messages and fault messages found in the WSDL document. You can then use the templates to test SOAP messages in the Handler Tester, Transformation Test Tool and Send Master utilities.

Related Links

“Generating SOAP Templates” (Integration Broker Testing Utilities and Tools)

Providing REST Web Services

The Provide Web Services component (IB_WSDLEXP_SRCH) features a wizard you can use to provide web services. This section focuses on providing REST web Services.

A REST service will produce a WADL document.

Note: For a service to be available to provide, an any-to-local routing must exist for the service. In addition, there must be a minimum of one service operation associated with the service. You can use the Provide Web Service wizard to select one or more services for which to generate documents. A separate document is generated for each service.

Step 1: Select Services

The first step is to search for and select the services that contain the service operations to include the WADL documents that you generate. To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

This example illustrates the Provide Web Services - Select Services page.

Provide Web Services

1

2

3

4

Step 1 of 4

Next >

Select Services

Enter search criteria and click Search. Select one or more services you would like to provide.

Search Criteria

Service Name

begins with

QE_W

Description

begins with

Object Owner ID

equals

☒ REST Service

Search

Search Results

<< < 1-1 of 1 > >> | View All

	Service	Description
☒	QE_WEATHERSTATION	Weather Station Service

You can search by the full or partial service name and service description. You can also search by object owner ID, if one is defined for the service. You can enter one or more of these criteria when performing your search.

Field or Control	Description
Service Name	Enter a full or partial service name.
Description	Enter the full or partial description of the service.
Object Owner ID	Select the object owner of the service to provide.
REST Service	Make sure this box is selected for a REST Service.

Click the **Search** button.

Select the check box next to each name of the services to provide.

566

Copyright © 1988, 2025, Oracle and/or its affiliates.

Click the **Next** button to proceed to the next step in the wizard, selecting service operations.

Step 2: Select Service Operations

Use the Select Service Operations page (IB_WSDL_EXP_OPER) of the Provide Web Service Wizard to select service operations to provide.

This example illustrates the Select Service Operations page for a REST service.

Provide Web Services

1234

Step 2 of 4

< Previous

Next >

Select Service Operations

Select one or more operations for each service.

Service

QE_WEATHERSTATION

☐ Use Service Alias in WADL

☐ Use Secure Target Location

Description

Weather Station Service

Service Alias

WeatherStation

Operations

<< < 1-5 of 5 > >> | View All

Service Operation	Description	Operation Type	Request Message	Response Message	Fault Message
☒ QE_WEATHERSTATION_DELETE.v1	WeatherStation YO HO HO	Synchronous	.	QE_WEATHERDATA.v1	.
☒ QE_WEATHERSTATION_GET.v1	WeatherStation Zebra	Synchronous	IB_REST_STUB.IB_REST_STUB	QE_WEATHERDATA.v1	QE_WEATHER_FAULT.v1
☒ QE_WEATHERSTATION_HEAD.v1	WeatherStation Zebra	Synchronous	.	.	.
☒ QE_WEATHERSTATION_POST.v1	WeatherStation Zebra	Synchronous	QE_FLIGHTPLAN_SYNC.VERSION_1	QE_WEATHERDATA.v1	QE_WEATHER_FAULT.v1
☒ QE_WEATHERSTATION_PUT.v1	WeatherStation Zebra	Synchronous	QE_FLIGHTPLAN_SYNC.VERSION_1	QE_WEATHERDATA.v1	.

☒ Select All ☐ Clear All

Field or Control	Description
Use Service Alias in WADL	Select this checkbox to specify that the system use the service alias name in the generated WADL, rather than the actual service name.
Use Secure Target Location	Select this checkbox if you want to export the WSDL to the URL specified in the Secure Target Location field on the Service Configuration page. If you do not select this option, WSDL is exported to the URL specified in the Target Location field defined on the Service Configuration page.

If you are attempting to provide a different version of an existing WADL document, the **Service System Status** mode set, *Production* or *Development*, may impact your results.

See [WSDL Document and WADL Document Versioning](#).

Click the **Next** button to proceed to the next step in the wizard.

Step 3 View WADL

Use the View WADL page (IB_WSDLEXP_PVIEW) to preview the WADL.

This example illustrates the View WADL/OpenAPI page.

Provide Web Services

Step 3 of 4

1 2 3 4

< Previous Next >

View WADL/OpenAPI

View the generated WADL/OpenAPI for each service.

Selected Services

Service	Description	
QE_WEATHERSTATION	Weather Station Service	View WADL/OpenAPI

Each service for which a WADL document will be generated is listed. Click the **View WADL/OpenAPI** link to view the WADL document for each service that you have selected.

This example illustrates the WADL/OpenAPI Viewer page. T

WADL/OpenAPI Viewer

Help

Service:

```
<?xml version="1.0"?>
<application xmlns="http://wadl.dev.java.net/2009/02"
xmlns:QE_FLIGHTPLAN_SYNC.VERSION_1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_FLIGHTPLAN_SYNC.VERSION_1"
xmlns:QE_WEATHERDATA.v1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_WEATHERDATA.v1"
xmlns:QE_WEATHER_FAULT.v1="http://xmlns.oracle.com/Enterprise/Tools/schemas/QE_Weather.QE_Weather_Fault.v1"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <grammars>
    <include href="QE_WEATHERDATA.v1.xsd"/>
    <include href="QE_WEATHER_FAULT.v1.xsd"/>
    <include href="QE_FLIGHTPLAN_SYNC.VERSION_1.xsd"/>
  </grammars>
  <resources base="http://ORACLE_ENDPOINT">
    <resource uri="WeatherStation.v1">
      <method href="#GETWeatherStation.v1"/>
      <method href="#HEADWeatherStation.v1"/>
      <method href="#POSTWeatherStation.v1"/>
      <method href="#PUTWeatherStation.v1"/>
      <method href="#DELETEWeatherStation.v1"/>
    </resource>
  </resources>
</application>
```

Return


Click the **Return** button to return to the View WADL/OpenAPI page.

Click the **Next** button to proceed to the next step in the wizard.

Step 4: Specify Publishing Options

After you preview the WADL document, use the Specify Publishing Options page (IB_WSDLEXP_LOC) to specify the publish location of the generated documents.

This example illustrates the Specify Publishing Options page for REST service.

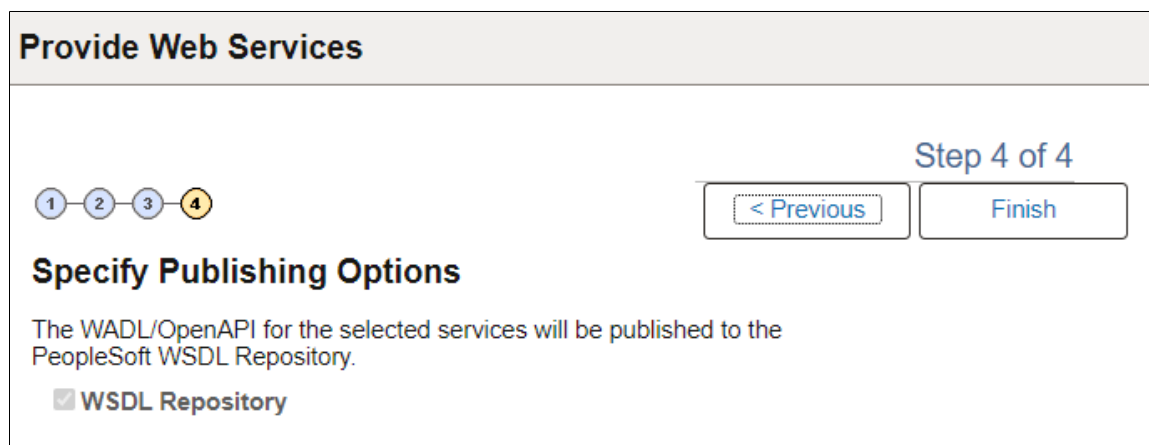

The screenshot shows a web interface titled "Provide Web Services". At the top right, it says "Step 4 of 4". Below this, there is a progress indicator with four numbered circles (1, 2, 3, 4), where circle 4 is highlighted. To the right of the progress indicator are two buttons: "< Previous" and "Finish". The main heading is "Specify Publishing Options". Below this, a text block states: "The WADL/OpenAPI for the selected services will be published to the PeopleSoft WSDL Repository." Underneath this text is a checkbox labeled "WSDL Repository", which is checked.

By default the system publishes WADL documents to the PeopleSoft WSDL repository.

Click **Finish** to publish the document and confirm the results.

Step 5: Confirm Results

Use the Confirm Results page (IB_WSDLEXP_RSLTS) to view the WADL Generation Log:

This example illustrates the Confirm Results page.

Provide Web Services

Confirm Results

View the WADL/OpenAPI Generation Log to confirm the results of the wizard.

WADL/OpenAPI Generation Log:

Inserted WADL: QE_WEATHERSTATION.1 in the repository

Generated WADL URL: http://<machine>:
<port>/PSIGW/RESTListeningConnector/LOCAL/QE_WEATHERSTATION.1.
wadl

Provide Another Service

The WADL/OpenAPI Generation Log provides the name of the services and URL for each WADL document generated.

You can cut and paste the URL into a browser to access the document. You can also access the document using the WSDL repository.

To provide another service, click the **Provide Another Service** button and return to step 1 of the wizard.

Providing OpenAPI REST Web Services

The Provide Web Services component (IB_WSDLEXP_SRCH) features a wizard you can use to provide web services. This section focuses on providing OpenAPI REST web Services.

An OpenAPI REST service will produce an OpenAPI document.

Note: For a service to be available to provide, an any-to-local routing must exist for the service. In addition, there must be a minimum of one service operation associated with the service. You can use the Provide Web Service wizard to select one or more services for which to generate documents. A separate document is generated for each service.

Step 1: Select Services

The first step is to search for and select the services that contain the service operations to include the OpenAPI documents that you generate. To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

To access the page select **PeopleTools > Integration Broker > Web Services > Provide Web Services**.

This example illustrates the Select Services page with REST Service selected.

Provide Web Services

1

2

3

4

Step 1 of 4

Next >

Select Services

Enter search criteria and click Search. Select one or more services you would like to provide.

Search Criteria

Service Name

begins with

F

Description

begins with

Object Owner ID

equals

☒ REST Service

Search

Search Results

<

>

1-1 of 1

>

>

View All

	Service	Description
☒	FLIGHT_INFORMATION	Flight Information

You can search by the full or partial service name and service description. You can also search by object owner ID, if one is defined for the service. You can enter one or more of these criteria when performing your search.

Field or Control	Description
Service Name	Enter a full or partial service name.
Description	Enter the full or partial description of the service.
Object Owner ID	Select the object owner of the service to provide.
REST Service	Make sure this box is selected for a REST Service.

Click the **Search** button.

Select the check box next to each name of the services to provide.

Click the **Next** button to proceed to the next step in the wizard, selecting service operations.

Step 2: Select Service Operations

Use the Select Service Operations page (IB_WSDL_EXP_OPER) of the Provide Web Service Wizard to select service operations to provide.

This example illustrates the Select Service Operations page for an OpenAPI REST service.

Provide Web Services New Window

1 2 3 4 < Previous Next >

Select Service Operations

Select one or more operations for each service.

Service: FLIGHT_INFORMATION Description: Flight Information
Service Alias: flightinformation

☐ Use Secure Target Location

Operations

Service Operation	Description	Operation Type	Request Message	Response Message	Fault Message
☐ FLIGHT_INFORMATION_GET.v1	flight	Synchronous	IB_GENERIC_REST.V1	IB_GENERIC_REST.V1	IB_FAULT.V1
☐ FLIGHT_INFORMATION_POST.v1	flight	Synchronous	IB_GENERIC_REST.V1	IB_GENERIC_REST.V1	IB_FAULT.V1

☒ Select All ☐ Clear All

Field or Control	Description
Use Secure Target Location	Select this checkbox if you want to export the OpenAPI to the URL specified in the Secure Target Location field on the Service Configuration page. If you do not select this option, OpenAPI is exported to the URL specified in the Target Location field defined on the Service Configuration page.

Click the **Next** button to proceed to the next step in the wizard.

Step 3 View WADL/OpenAPI

Use the View WADL/OpenAPI page (IB_WSDLEXP_PVIEW) to preview the OpenAPI.

This example illustrates the View WADL/OpenAPI page for an OpenAPI REST Service.

Provide Web Services

1

2

3

4

Step 3 of 4

< Previous

Next >

View WADL/OpenAPI

View the generated WADL/OpenAPI for each service.

Selected Services

|<

<

1-1 of 1

>

>|


Service	Description	
FLIGHT_INFORMATION	Flight Information	View WADL/OpenAPI

Each service for which an OpenAPI document will be generated is listed. Click the **View WADL/OpenAPI** link to view the OpenAPI document for each service that you have selected.

Copyright © 1988, 2025, Oracle and/or its affiliates.

573

This example illustrates the WADL/OpenAPI Viewer page for an OpenAPI.

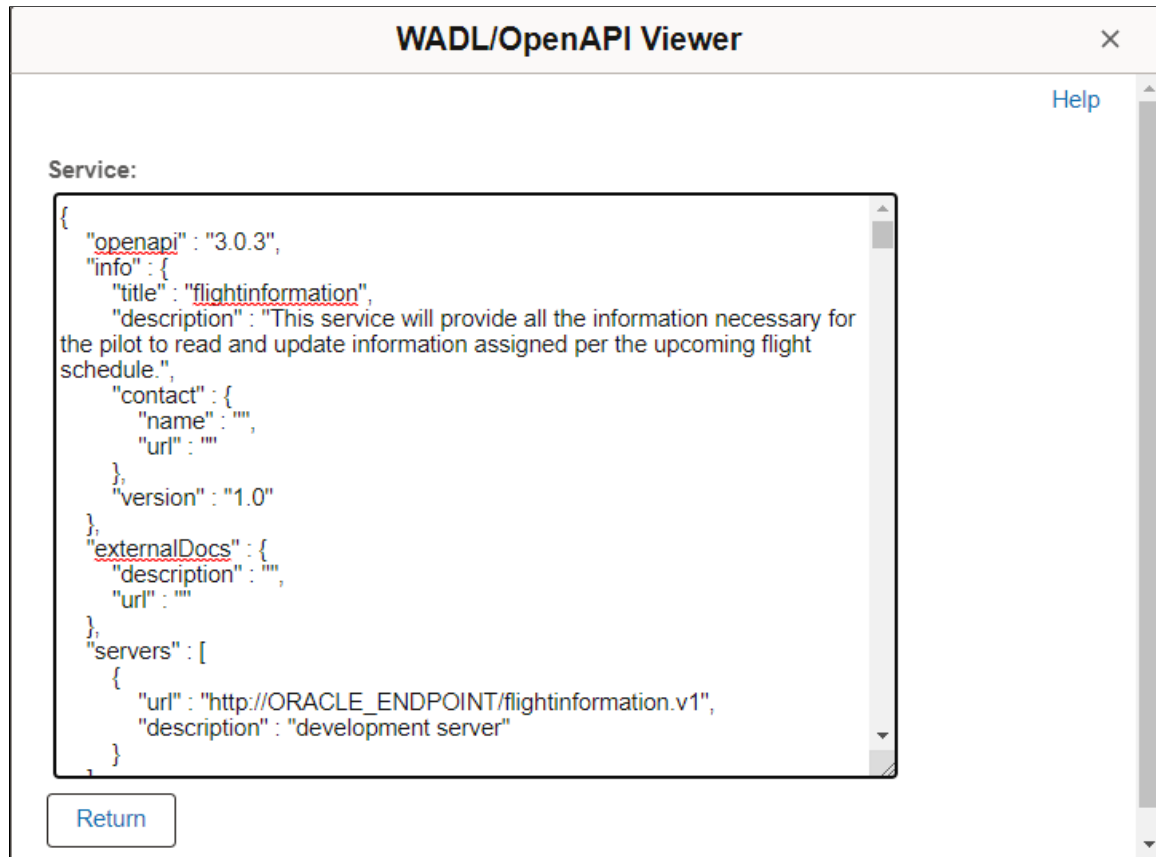


Click the **Return** button to return to the View WADL/OpenAPI page.

Click the **Next** button to proceed to the next step in the wizard.

Step 4: Specify Publishing Options

After you preview the WADL document, use the Specify Publishing Options page (IB_WSDLEXP_LOC) to specify the publish location of the generated documents.

This example illustrates the Specify Publishing Options page for REST service.

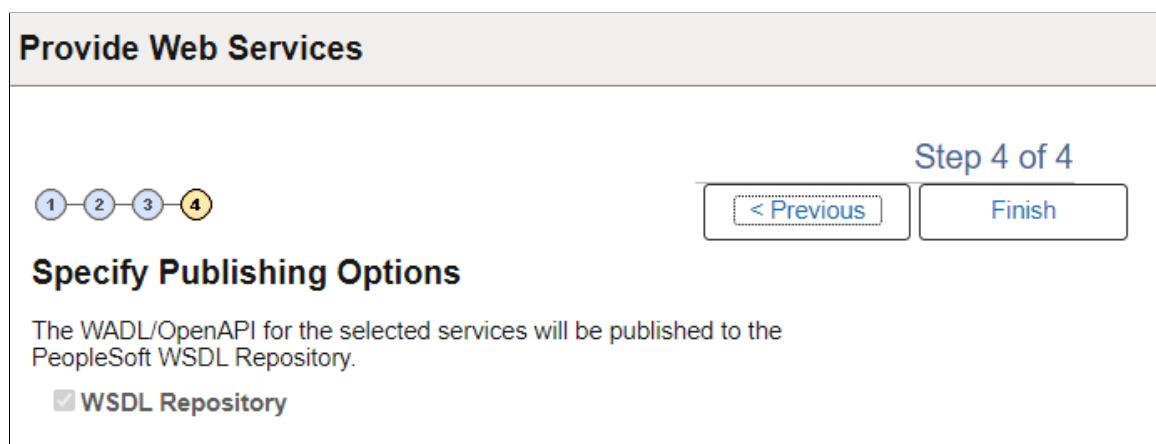

By default the system publishes WADL documents to the PeopleSoft WSDL repository.

Click the **Finish** button to view the Confirm Results page.

Step 5: Confirm Results

Use the Confirm Results page (IB_WSDLEXP_RSLTS) to view the WADL/OpenAPI Generation Log:

This example illustrates the Confirm Results page for an OpenAPI REST service.

Provide Web Services

Confirm Results

View the WADL/OpenAPI Generation Log to confirm the results of the wizard.

WADL/OpenAPI Generation Log:

```
Inserted OpenApi: FLIGHT_INFORMATION.1 in the repository  
  
Generated OpenApi URL:  
http://<machine>:8000/PSIGW/RESTListeningConnector/LOCAL/FLIGHT_IN  
FORMATION.1.api
```

[Provide Another Service](#)

The WADL/OpenAPI Generation Log provides the name of the services and URL for each OpenAPI document generated.

You can cut and paste the URL into a browser to access the document. You can also access the document using the WSDL repository.

To provide another service, click the **Provide Another Service** button and return to step 1 of the wizard.

Accessing Generated Web Service Documents

You can access the generated documents from the Confirm Results page of the Provide Web Service wizard or from the WSDL Repository after the web service is published.

Accessing from the Provide Web Service Component

The last page of the Provide Web Service wizard, the Confirm Results page (IB_WSDLEXP_RSLTS), displays a generation log. The text box contains URLs for generated document.

To access a document copy the WSDL URL, WADL URL or OpenAPI URL from the generation log and paste it into a browser of your choice to access the document.

Accessing from the WSDL Repository

Access the WSDL Repository page (IB_SERVICEDEFN_SEC) (**PeopleTools > Integration Broker > Integration Setup > Service Definitions**).

Depending on the Service type, the appropriate link is available on the Service definition page:

- View WSDL
See [Viewing WSDL Documents Generated for Services](#)
- View WADL
See [Viewing WADL Documents for REST Services](#)
- View OpenAPI
See [Viewing OpenAPI Documents for REST Services](#)

Deleting Web Service Documents

Use the Service Administration – WSDL page (IB_HOME_PAGE7) to delete WSDL documents or WADL documents generated for a service. To access the page select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **WSDL** tab.

This example illustrates Integration Broker Admin - WSDL page.

Integration Broker Admin

WSDL Services Service Operations Messages Message Schemas Queues >

Service System Status: Development
[Clear WSDL Export Status](#)

▼ Delete

Service:

[Search](#)

WSDL/WADL

|< < 1-1 of 1 > >| View All

Select	Service	WSDL/WADL Name	Results
☐			

[Delete](#)

To delete a Web Service document:

1. Access the Services Administration - WSDL page (select **PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin**).
2. Click the arrow next to the Delete section header to expand the section.
3. In the **Service** field, enter the name of the service that contains the document to delete.
4. Click the **Search** button.

Search results appear in the WSDL/WADL results grid.

5. In the results grid, select the check box next to the document to delete.
6. Click the **Delete** button.

The **Clear WSDL Export Status** link that appears on this page is discussed elsewhere in the product documentation.

Consuming Services

Understanding Consuming Services

PeopleSoft Integration Broker can consume external services by way of consuming WSDL documents and generates PeopleSoft integration metadata, so that PeopleSoft applications can invoke outbound synchronous and outbound asynchronous services.

PeopleSoft Integration Broker features a Consume Web Service wizard that steps you through the task of consuming WSDL documents.

Understanding the Consume Web Service Wizard

This section discusses the Consume Web Service wizard.

Consume Web Service Wizard Features

The Consume Web Service wizard supports:

- WS-interoperability standards for WSDL.
- Consumption of WSDL version 1.1 documents.
- Consuming WSDL with SOAP, HTTP-GET/POST bindings.
- Nested URIs to resolve WSDL fragments.

Operation Types Supported

You can consume WSDL documents for the following service operation types:

- Synchronous.
- Asynchronous one-way.
- Asynchronous request/response.

Sources for Consuming WSDL Document

You can use the Consume Web Service wizard to consume WSDL documents from the following sources:

- UDDI repositories.
- WSDL URL.

- WSIL registries.
- File.
- Legacy PeopleSoft WSDL documents.

Integration Metadata Created by the Consume Web Service Wizard

The Consume Web Service wizard creates the following integration metadata in the PeopleSoft system from the consumed WSDL documents:

Note: The internal name is the name that the PeopleSoft system assigns to the metadata and is the definition name that appears in the PeopleSoft system.

Metadata	Internal Name	Version	Comments
Service definitions	System generated name in the format: <i><WSDL service name>_<four random generated numbers></i> .	Version one, denoted as: <i>.V1</i>	NA
Service operation definitions	System generated name in the format: <i><WSDL Service Operation Name>_<four random generated numbers></i> .	Version one, denoted as: <i>.V1</i>	NA

Metadata	Internal Name	Version	Comments
Message definitions	System-generated name in the format: <i>M<unique number></i>. For example: <i>M120508438</i>.	Version one, denoted as: <i>.V1</i>	By default, the system creates document type messages. Includes request messages, response messages, and fault messages, as appropriate. You can rename the system-generated message names in the wizard using more meaningful names. The consume process also generates schemas for each message. All schemas are unstructured. If you chose not to create document type messages, it creates nonrowset-based or container messages with references to schemas. Note: Any integers or decimals not defined with a length in the WSDL will be defined in the document as unbounded. The maximum length that fields are defined in the database for Number or Signed Number is 31, which includes the negative (if applicable) and the fractional part (for decimal). If the value needs to be larger than 31, string should be used. Additional information about messages that the Consume Web Service wizard generates is featured in this section.
Document definitions	The following metadata names are system generated: - Package name: <i><Service_Name></i>. - Document name: <i><WSDL_Operation (input/output)_Message_Name></i>.	Version one, denoted as: <i>.V1</i>	NA

Metadata	Internal Name	Version	Comments
Routing definitions	System-generated name in the format <i>~IMPORTED~<unique number></i> . For example: <i>~IMPORTED~14857</i> .	Version one, denoted as: <i>.V1</i>	System creates a point-to-point routing.

Messages Generated

By default, the system creates document type messages based on the message schema(s). Documents generated are restricted. To modify the document, you must use the Restricted Documents page to clear the restricted status.

If the system cannot create document type messages or if you chose not to create document type messages, it creates nonrowset-based or container messages with references to schemas.

Related Links

“Managing Write-Access to Documents” (Documents Technology)

Fault Messages

By default, the Consume Web Service wizard builds document type messages and will create a single fault message.

To read faults in document type messages generated by the Consume Web Service wizard, use the `GetContentString()` method of the `Message` object.

To process multiple faults, you can examine the stored WSDL generated by the wizard.

Another option to capturing and reading multiple faults is to clear the Build Document Messages option in Step 1 of the wizard so that the system generates nonrowset-based messages. If generating nonrowset-based messages, PeopleSoft Integration Broker creates a part message for each fault in the WSDL operation. The system then creates a container message and places the fault part messages in the container. The container message is assigned as a fault message to the created service operation.

Multiple Root Elements in Message Schemas

In a WSDL document, the schema defined in the `<types>` section may have multiple root elements, corresponding to multiple messages used by one or more operations. When the PeopleSoft system consumes such a WSDL document, the entire message schema contained in the WSDL document gets associated with each of the service operation messages when the PeopleSoft system generates the integration metadata.

Use the element name that appears in the **Comments** text box of the message definition to construct the XML data for the correct schema fragment in the message.

Delivered Queues and Nodes

PeopleSoft delivers a queue, *WSDL_QUEUE*, and a node, *WSDL_NODE*, that the Consume Web Service wizard uses as defaults.

You may use these objects or select other existing queues or nodes.

Binding Style of Consumed WSDL Documents

The binding style of consumed WSDL documents appears in the service operation definition for the consumed service. The Default Service Operation Version section of the Service Operations page features a **Comments** box. The binding style appears in that box.

Working with Asynchronous Request/Response Service Operations

If a WSDL document has two port types with a single input message in each operation, the Consume Web Service wizard displays step where you can convert a pair of asynchronous one-way operations to a single asynchronous request/response operation. In this step you can special the request and callback service operations and convert the operation.

Prerequisites for Consuming Services

To consume services you must set properties in the Service Configuration component as follows:

- Use the Service Configuration page to define the service namespace, schema namespace, target location, and service system status.

See “Understanding Configuring PeopleSoft Integration Broker for Handling Services” (Integration Broker Administration).

- If consuming services from a UDDI repository, you must first specify the UDDI server and other relevant information within the PeopleSoft system using the Service Configuration-UDDI Configuration page.

See “Understanding Specifying UDDI Repositories in PeopleSoft Systems” (Integration Broker Administration).

To consume WSDL from a file, you must set the PS_FILEDIR environment variable on the machine on which the application server resides. If you do not set this variable and attempt to consume WSDL from a file, you will receive an error that the WSDL cannot be parsed.

See [Understanding Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables](#).

Before consuming services evaluate your security requirements.

Common Elements Used to Consume Services

Field or Control	Description
Description	Description of the WSDL source.
Endpoint	According to the Word Wide Web Consortium (W3C), “An association between a binding and a network address, specified by a URI, that may be used to communicate with an instance of a service.” A URI that accepts messages containing document-oriented or procedure-oriented information.
Internal Message	Name of the consumed request message, response message or fault message in the PeopleSoft system
Internal Operation	Name of the consumed service operation in the PeopleSoft system
Internal Service	Name of the consumed service in the PeopleSoft system
Next	Click the button to advance to the next step in the wizard.
Operation Type/Operation	Type of service operation. See Services Operation Types.
Previous	Click the button to go back to the previous step in the wizard.
Select	Select the check box to select the WSDL service or WSDL operation on which to perform an action.
View WSDL	Click the link to view the WSDL document for a service from the WSDL source.
WSDL Port	According to the W3C: • “A port indicates a specific location for accessing a service using a specific protocol and data format.” • “The network address of an endpoint and the binding to which it adheres.”
WSDL Fault Message	Name of the fault message specified in the WSDL document that the PeopleSoft system is consuming.

Field or Control	Description
WSDL Request Message	Name of the request message specified in the WSDL document that the PeopleSoft system is consuming.
WSDL Response Message	Name of the response message specified in the WSDL document that the PeopleSoft system is consuming.
WSDL Service	The name of the external service in the WSDL document that the PeopleSoft system is consuming.
WSDL Source	Indicates the source of the service that the PeopleSoft system is consuming.
WSDL URL	Displays the WSDL URL, WSIL URL, File name or UDDI server name of the WSDL source.

Related Links

[Word Wide Web Consortium](#)

Using the Consume Web Service Wizard

This section discusses how to use the Consume Web Service wizard to:

- Select the WSDL source.
- Select a service.
- Select a service port.
- Select service operations.
- Convert asynchronous operations.
- Rename operation messages.
- Select a queue for asynchronous operations.
- Select the receiver node.
- Confirm and view results.

Step 1: Select WSDL Source

Use the Select WSDL Source page (IB_WSDL_IMP_LOC) to select the source for consuming a WSDL document.

This example illustrates the Select WSDL Source page.

Consume Web Service Wizard

Step 1 of 8

12345678

Next >

Select WSDL Source

Select the source of the WSDL you would like to consume.

WSDL Sources

☐ UDDI

☐ WSDL URL

☐ WSIL URL

☐ File

Load from File

☒ Build Document Messages

To select the WSDL source:

1. Access the Select WSDL Source page (**PeopleTools > Integration Broker > Web Services > Consume Web Services**).
2. Select the radio button next to one of the following values and enter the information specified:

Field or Control	Description
UDDI	To consume a WSDL document from a UDDI repository, select theUDDI radio button. After you select the radio button, select the UDDI repository from the drop-down list box. To use this option, you must first specify the UDDI repository in the PeopleSoft system. See Prerequisites for Consuming Services.
WSDL URL	To consume a WSDL document from a WSDL URL, select the WSDL URL radio button. After you select the radio button, enter the URL in the WSDL URL field.

Field or Control	Description
WSIL URL	To consume a WSDL document from a WSIL URL, select the WSIL URL radio button. After you select the radio button, enter a URL in the WSIL URL field.
File	To consume a WSDL document from a file enter a file name in the File field or browse for the file. To enter the file name, in the File field, enter the path and file name. For example: <i>c:\temp\sample.wsdl</i> To browse for the file: 1. Click the Load from File button. A file upload page appears. 2. Click the Browse button to search for and select the file location and name. 3. Click the Upload button. The Select WSDL Source page appears with the file location and name populated in the File field. The Select WSDL Source page appears with the file location and name populated in the File field.
Legacy WSDL (Prior to 8.48)	Select this option to consume a PeopleSoft WSDL document generated from releases prior to PeopleTools 8.48.

3. At the **Build Document Messages** check box:
 - Select the check box to build document type messages for the consumed service. (Default.)
 - Deselect the check box to build nonrowset-based messages for the consumed service.
4. Click the **Next** button to proceed to the next step in the wizard.

Step 2: Select Service

Use the Select Service page (IB_WSDL_IMP_SVC) to select the services to consume.

This example illustrates the Select Service page.

Consume Web Service Wizard Step 2 of 8

1 2 3 4 5 6 7 8 < Previous Next >

Select Service

Select one or more services to consume.

WSDL Source: File Description: LoanService.wsdl

Select	WSDL Service	WSDL Url	
☐	LoanService	LoanService.wsdl	View WSDL
☐	LoanServiceCallback	LoanService.wsdl	View WSDL

Before selecting services to consume, you can click the **View WSDL** link to view the WSDL for each service. The WSDL document opens in a browser. Close the browser when you have finished viewing the WSDL document.

WSDL documents that the PeopleSoft system consumes from pre-PeopleTools 8.48 systems display in an edit box.

To select services to consume:

1. Select the check box next to each service to consume.
To clear a selection, select the box again.
2. Click the **Next** button to proceed to the next step in the wizard.

Step 3: Select Service Ports

If a service you select has more than one port, the Select Service Ports page (IB_WSDL_IMP_SVC2) appears.

This example illustrates the Select Service Ports page.

Consume Web Service Wizard Step 3 of 8

1 2 3 4 5 6 7 8 < Previous Next >

Select Service Ports

The service you selected has more than one port. Select one or more service ports.
Complete routings will only be created for SOAP bindings.

WSDL Source: File Description: LoanService.wsdl

Select	WSDL Service	Internal Service	WSDL Port	Endpoint	
☐	LoanService	LOANSERVICE	LoanServicePort	http://localhost:8080/axis/services/AxisLoan	View WSDL
☐	LoanServiceCallback	LOANSERVICECALLBACK	LoanServiceCallbackPort		View WSDL

Multiple port options only appear when you are working with asynchronous request/response operations in a WSDL document or the service has multiple bindings. Typically, when working with this operation type, you select both options.

To select service ports, in the Select column, select the check box next to each service.

Step 4: Select Service Operations

Use the Select Service Operations page (IB_WSDL_IMP_OPR) to select the operations in the selected service to consume.

This example illustrates the Select Service Operations page.

Consume Web Service Wizard
Step 4 of 8

1
2
3
4
5
6
7
8

< Previous
Next >

Select Service Operations

Select one or more service operations to consume.

Internal Service: **LOANSERVICE** [View WSDL](#)

Service Operations				
Select	WSDL Operation	Internal Operation	WSDL Port Type	Operation Type
☒	initiate	INITIATE	LoanService	Asynchronous - One Way
☒	onResult	ONRESULT	LoanServiceCallback	Asynchronous - One Way

To select service operations to consume, in the **Select** column, select the check box next to each service operation to consume.

Step 5: Convert Asynchronous Operations

The Convert Asynchronous Operations page (IB_WSDL_IMP_ASYNOP) appears when the system detects that you are consuming two asynchronous one-way operations. The two asynchronous one-way operations appear in the Asynchronous One-Way Operations section on the page.

This example illustrates the Convert Asynchronous Operations page.

Consume Web Service Wizard

Step 5 of 8

1

2

3

4

5

6

7

8

< Previous

Next >

Convert Asynchronous Operations

Two Asynchronous One-Way operations can be converted to one Asynchronous Request/Response operation by identifying the Request and Callback operation pair. Select the pair and click Convert.

Internal Service:

LOANSERVICE

[View WSDL](#)

Async Request/Response Pair

Request Operation:

Callback Operation:

Convert

Asynchronous One-Way Operations

First

1-2 of 2

Last

WSDL Operation	WSDL Request Message	WSDL Fault Message
initiate	LoanServiceRequestMessage	
onResult	LoanServiceResultMessage	LoanServiceFaultMessage

Asynchronous Request/Response Operations

First

1 of 1

Last

WSDL Operation	WSDL Request Message	WSDL Response Message	WSDL Fault Message

This page enables you to convert the two operations into a single asynchronous request/response operation type.

WSDL specification 1.1 has no standards for specifying an asynchronous request/response operation. Hence, the Consume Web Service wizard is not able to automatically detect such operations in a WSDL 1.1 document.

To make this conversion, you must specify the request operation and the callback operation, using the **Request Operation** and **Callback Operation** fields on the page. The system populates the possible values to select in each field from the operation selected.

After you make the conversion the new asynchronous request/response operation appears in the Asynchronous Request/Response Operations section of the page.

590

Copyright © 1988, 2025, Oracle and/or its affiliates.

This example illustrates the Convert Asynchronous Operations page. The example shows the page after converting an asynchronous one-way service operation into an asynchronous request/response service operation.

Consume Web Service Wizard **Step 5 of 8**

1 2 3 4 5 6 7 8 < Previous Next >

Convert Asynchronous Operations

Two Asynchronous One-Way operations can be converted to one Asynchronous Request/Response operation by identifying the Request and Callback operation pair. Select the pair and click Convert.

Internal Service: LOANSERVICE [View WSDL](#)

Async Request/Response Pair

Request Operation:

Callback Operation:

Convert

Asynchronous One-Way Operations		
WSDL Operation	WSDL Request Message	WSDL Fault Message

Asynchronous Request/Response Operations			
WSDL Operation	WSDL Request Message	WSDL Response Message	WSDL Fault Message
initiate	LoanServiceRequestMessage	LoanServiceResultMessage	LoanServiceFaultMessage

To convert two one-way asynchronous operations into one asynchronous request/response operation:

1. From the **Request Operation** drop-down list box, select the request operation.
2. From the **Callback Operation** drop-down list box, select the callback operation.
3. Click the **Convert** button.

The single operation appears in the Asynchronous Request/Response Operations grid at the bottom of the page.

To undo a conversion, in the Asynchronous Request/Response grid click the **Delete a Row** button (-) at the end of a data row.

Step 6: Rename Operation Messages

The Consume Web Service Wizard auto-generates message names. Use the Rename Operation Messages page (IB_WSDL_IMP_MSGS) to rename auto-generated message names.:

The example illustrates the Rename Operation Messages page.

Consume Web Service Wizard
Step 6 of 8

1
2
3
4
5
6
7
8

< Previous
Next >

Rename Operation Messages

Message names are generated automatically. You can optionally change them to more meaningful names.

Internal Service: LOANSERVICE [View WSDL](#)

Operations
View All
First 1 of 1 Last

Internal Operation: INITIATE
Operation Type: Asynch Request/Response

Messages
First 1-3 of 3 Last

WSDL Request Message:	LoanServiceRequestMessage
Internal Message:	M976888331
WSDL Response Message:	LoanServiceResultMessage
Internal Message:	M560829492
WSDL Fault Message:	LoanServiceFaultMessage
Internal Message:	M898760947

When the system creates request, response and fault messages from the consumed service, it provides them with system-generated names. The previous example shows system-generated names appearing for all messages.

Use the page to rename the messages to more meaningful names.

This example illustrates the Rename Operation Messages page. The example shows all messages renamed.

Consume Web Service Wizard
Step 6 of 8

1
2
3
4
5
6
7
8

< Previous
Next >

Rename Operation Messages

Message names are generated automatically. You can optionally change them to more meaningful names.

Internal Service: LOANSERVICE [View WSDL](#)

Operations
View All
First 1 of 1 Last

Internal Operation: INITIATE
Operation Type: Asynch Request/Response

Messages
First 1-3 of 3 Last

WSDL Request Message:	LoanServiceRequestMessage
Internal Message:	LOANSVC_REQ_MSG
WSDL Response Message:	LoanServiceResultMessage
Internal Message:	LOANSVC_RESP_MSG
WSDL Fault Message:	LoanServiceFaultMessage
Internal Message:	LOANSVC_FAULT_MSG

To rename operation messages:

1. Clear the system-generated name from a message name field.
2. Enter a new name in the field.
3. Click the **Next** button to proceed to the next step in the wizard.

The system checks whether the user-entered message name already exists in the database and displays an error if the name exists.

Step 7: Select a Queue for Asynchronous Operations

The Select a Queue for Asynchronous Operations page (IB_WSDL_IMP_QUEUE) appears only when you are consuming asynchronous one-way and asynchronous request/response operations.

This example illustrates the Select a Queue for Asynchronous Operations page.

Consume Web Service Wizard Step 7 of 8

1 2 3 4 5 6 **7** 8 < Previous Next >

Select a Queue for Asynchronous Operations

Select the queue to be used for each asynchronous operation.

Internal Service: LOANSERVICE [View WSDL](#)

Operations		Find	First	1 of 1	Last
Internal Operation:	INITIATE	Operation Type: Asynch Request/Response			
☒ Use Default Queue	WSDL_QUEUE				
☐ Use Existing Queue		Search			

Note: This page appears only when asynchronous operations are being consumed from the WSDL document.

Use the Select a Queue for Asynchronous Operations page to select a service operation queue for an asynchronous service operation.

PeopleSoft delivers a queue, *WSDL_QUEUE*, to which it assigns asynchronous service operations by default. However, you can select a different queue to use.

To select a queue for asynchronous operations:

1. Click the **Use Existing Queue** radio button.
2. From the **Use Existing Queue** drop-down list box, select the queue to use for the service operation.
3. Click the **Next** button to proceed to the next step in the wizard.

Step 8: Select the Receiver Node

Use the Select the Receiver Node page (IB_WSDL_IMP_NODE) to select the receiving node for the service.

This example illustrates the Select the Receiver Node page.

Consume Web Service Wizard Step 8 of 8

1 2 3 4 5 6 7 8

[< Previous](#) [Finish](#)

Select the Receiver Node

Select the receiver node for this service.

Internal Service: LOANSERVICE [View WSDL](#)

☒ **Use Default Node** WSDL_NODE

☐ **Use Existing Node**

PeopleSoft delivers a node, *WSDL_NODE*, that the system uses as the receiving node by default. However, you can select a different receiving node.

If you use the default node as the receiver node, the system adds connector property overrides to the default node in the generated service operation routing.

Note: You can apply WS-Security to services you consume using the Consume Web Service wizard. The node you select in this step determines how you implement WS-Security for these services.

See “Implementing WS-Security on Services Consumed Using the Consume Web Service Wizard” (Integration Broker Administration).


To select a receiving node for a service operation:

1. Click the **Use Existing Node** radio button.
2. From the **Use Existing Node** drop-down list box, select the receiving node to use for the service operation.
3. Click the **Finish** button to proceed to the next step in the wizard.

Confirm and View Results

The final page in the Consume Web Service wizard is the Confirm Results page (IB_WSDL_IMP_RSLTS).

This example illustrates the Confirm Results page.

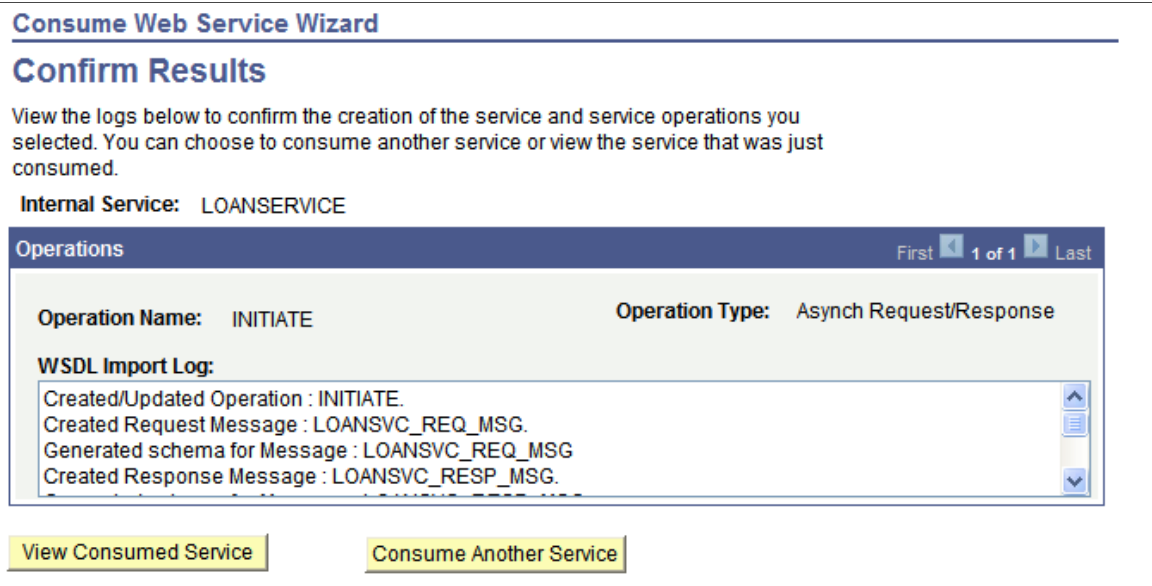

The Confirm Results page features a WSDL Import Log section that provides a summary of the WSDL import and lists the integration metadata created. The following example shows the contents of the WSDL Import Log for the example shown in this topic of consuming a service:

```
Created/Updated Operation : INITIATE.  
Created Request Message : LOANSVC_REQ_MSG.  
Generated schema for Message : LOANSVC_REQ_MSG  
Created Response Message : LOANSVC_RESP_MSG.  
Generated schema for Message : LOANSVC_RESP_MSG  
Created Fault Message : LOANSVC_FAULT_MSG.  
Failed to generate schema for Message : LOANSVC_FAULT_MSG  
Created Routing: ~IMPORTED~18003 for Operation: INITIATE  
Created Operation Version: V1
```

The Confirm Results page also features the following page elements:

Field or Control	Description
View Consumed Service	Click the button to open the consumed service in the Services component. See Accessing and Viewing Service Definitions .
Consume Another Service	Click the button to go back to step 1 of the Consume Web Service wizard and consume another service.

Accessing Integration Metadata for Consumed Services

After using the Consume Web Service wizard to consume a service into the PeopleSoft system, use the Service component to access, view and modify the integration metadata created.

This example illustrates the Services page. The example shows the service definition for the *LOANSERVICE* service created with the Consume Web Service Wizard.

Services

Service: LOANSERVICE

*Description: LOANSERVICE

Comments: LOANSERVICE

Service Alias: LoanService

Object Owner ID: ▼

*Namespace: http://services.otn.com

[Link Existing Operations](#) [View WSDL](#)

Service Operations

Service Operation:

Operation Type: ▼ Add

Existing Operations Customize | Find | View All | First 1 of 1 Last

Operation Message Links

Operation.Default Version	Description	Active	Operation Type	
INITIATE.V1	INITIATE	☒	Asy Rq/Rsp	

The example shows that when consuming a service, the PeopleSoft system creates active service operation versions for all operations of the service. In addition, the system saves the consumed WSDL documents for the service operations and you can view the WSDL documents by clicking the **View WSDL** link.

In the Existing Operations section, click the name of the service operation to open the Service Operations component. Use the Service Operations component to view and modify service operation data and message data, add handlers, and view and modify routing definitions created by the system.

Use one of the following methods to access the Services page and access and view integration metadata for a consumed service:

- On the Consume Web Service Wizard Results page, click the **View Consumed Service** link.
- Select **PeopleTools > Integration Broker > Integration Setup > Service Definitions** and select the name of the consumed service for which to view data.

Related Links

[Accessing and Viewing Service Definitions](#)

Integrating with Oracle Mediator and Oracle ESB-Based Services

Understanding Integrating with Oracle Mediator and Oracle ESB-Based Services

This topic discusses how to consume and provide Oracle Mediator and Oracle ESB-based services. This topic also features code examples to help illustrate consuming and providing Oracle Mediator and Oracle ESB-based services.

Note: The code examples in this topic are for illustrative purposes only and are not intended to be used in a production environment.

Oracle Mediator and Oracle ESB

Oracle Mediator is a component of Oracle Fusion Middleware 11g. Oracle Mediator separates integration concerns from applications and business logic. It moves data among disparate applications, both within and outside of an enterprise. It provides a messaging infrastructure and uses open standards to connect, transform, and route business documents. Oracle Mediator cannot provide services. Instead, it virtualizes endpoints and mediates between a client and a provider of a service.

In Oracle releases earlier than 11g, Oracle Mediator was named Oracle Enterprise Service Bus (ESB)

PeopleSoft supports integrations Oracle Mediator and Oracle ESB-based services. From a PeopleSoft perspective, the main differences between Oracle Mediator and Oracle ESB are:

- Oracle Mediator supports asynchronous request/response integrations. You cannot perform asynchronous request/response integrations using Oracle ESB.
- PeopleSoft supports integrations with Oracle ESB nested WSDL documents. Note that Oracle Mediator does not support nested WSDL documents.

Software Components

You must install the following software components to perform integrations using Oracle ESB or Oracle Mediator:

Software Component	Description
PeopleTools	Installs the PeopleSoft application server and the web. Also installs PeopleSoft Integration Broker and the PeopleSoft SOA, including the integration gateway, publication/subscription system, Provide Services Wizard, Consume Services Wizard, and so on.
Oracle Fusion Middleware	Required for integrations with Oracle Mediator 11g.
Oracle SOA Suite	Installs the Oracle services-oriented architecture, including Oracle Enterprise Manager. Required only for Oracle 10.1.3g ESB-based integrations.
Oracle JDeveloper Studio	Oracle JDeveloper Studio 11g features the Oracle Mediator used to develop Mediator projects. Oracle JDeveloper Studio 10.1.3g and earlier releases features the ESB Designer used to develop ESB projects.

Check the My Oracle Support website for the currently certified versions of Oracle SOA and Oracle JDeveloper Studio for use with PeopleTools.

Check PeopleSoft document for installation tips and other information.

See *PeopleSoft 9.2 Application Installation* for your database platform.

Check the following Oracle documentation for installation tips and other useful information:

- *Oracle SOA Suite Quick Start Guide.*
- *Oracle SOA Suite Installation Guide.*
- *Oracle JDeveloper Installation Guide.*
- *Oracle Mediator Quick Start Guide.*
- *Oracle Enterprise Service Bus Quick Start Guide.*
- *Oracle Enterprise Service Bus Installation Guide.*

Securing Oracle Mediator and Oracle ESB-Based Services

PeopleSoft Integration Broker provides a number of options that you can use to secure integrations. These include securing integrations at one or more of the following levels:

- Web server.
- Gateway level.
- Application server level.
- Node level.

- User level.
- Service operation level.
- And so on.

It is important to fully investigate these security options and implement those that best suit your business needs.

It is also important that you investigate the security options available for the Oracle SOA Suite and Oracle JDeveloper and to implement those security options that fulfill your security requirements.

Related Links

“Understanding Setting Up Secure Integration Environments” (Integration Broker Administration)

Prerequisites for Integrating with Oracle Mediator/ESB-Based Services

For creating integrations with Oracle Mediator and Oracle ESB services you must have PeopleSoft Integration Broker configured and running.

Note: This section discusses prerequisite configuration steps on the PeopleSoft system for integrating with Oracle Mediator and Oracle ESB-based services. Check your Oracle documentation for setup and configuration steps that you must perform on Oracle JDeveloper, and Oracle Mediator or Oracle ESB.

The following list is a partial checklist of items to configure on the PeopleSoft system:

- In PeopleTools ensure that the application server and web server are installed and running.
- On the Nodes-Node Definitions page, create a node to represent Oracle ESB. Set the **Node Type** field to *External* for this node.
- When configuring the integrationGateway.properties file, be sure to set the ig.isc.serverURL property equal to the name of the machine running the integration engine.
- When configuring the PeopleTools application server, set the PUB/SUB option to *Yes*. This value is required for asynchronous integrations.
- Activate the application server domain by setting the **Domain Status** to *Active*.
- Set the service namespace, the schema namespace, and the target location.
- To load files into PeopleTools from the file system, set PS_FILEDIR and PS_SERVDIR in the system variables on your machine.

Related Links

[PeopleSoft Integration Broker Metadata](#)

[Order of Precedence for Creating Integration Metadata](#)

[Understanding Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables](#)

Consuming and Invoking Oracle Mediator/ESB-Based Services

This section discusses how to:

- Provide Oracle Mediator/ESB-based services for consuming in PeopleSoft.
- Consume Oracle Mediator/ESB-based services.
- Invoke synchronous Oracle Mediator/ESB-based services.
- Invoke asynchronous Oracle Mediator/ESB-based services.
- Invoke asynchronous request/request Oracle Mediator services.

Understanding Consuming and Invoking Oracle Mediator/ESB-Based Services

This section provides information about consuming Oracle Mediator/ESB-Based services.

Oracle Mediator/ESB Projects When PeopleSoft is a Consumer

Oracle Mediator/ESB cannot provide a service. It can only mediate between a client and the provider of the service.

Hence, if PeopleSoft is the consumer of a Mediator or ESB service, the Mediator/ESB project will contain a SOAP service that will implement the business logic. Further there will be a routing service that will route the SOAP request message from PeopleSoft to the underlying web service implementation.

Service Routing Types

There are three types of routing services: synchronous, asynchronous, and asynchronous request/response.

Note: Oracle Mediator provides the ability to consume asynchronous request/response services. You cannot consume these types of services uses Oracle ESB.

The type of routing service determines the type of Mediator or ESB project. A Mediator or ESB project with a synchronous routing service defined is a synchronous Mediator/ESB project; and a Mediator/ESB project with an asynchronous routing service defined is an asynchronous Mediator/ESB project. Mediator projects with an asynchronous request/response service defined is an asynchronous request/response service.

Oracle ESB Nested and Non-Nested WSDL

PeopleSoft systems can consume WSDL documents that are nested or not nested. This section provides additional information on each type.

Note: PeopleSoft supports integrations with Oracle ESB nested WSDL documents. This feature is not available with Oracle Mediator.

Using nested WSDL documents allows you to separate the different elements of a service definition into independent documents that you can consume as needed.

Using nested WSDL helps you to write clearer definitions by enabling you to separate the definitions according to their level of abstraction. It also maximizes the ability to reuse service definitions.

The following example shows a nested WSDL document. The document is separated into three smaller documents: data type definitions, abstract definitions, and specific service bindings.

The following example shows a data type definition WSDL document:

```
//data type definitions WSDL//
<schema attributeFormDefault="unqualified"
  elementFormDefault="qualified"
  targetNamespace="http://xmlns.oracle.com/SynchAdd_ESB"
  xmlns="http://www.w3.org/2001/XMLSchema">
  <element name="SynchAdd_ESBProcessRequest">
    <complexType>
      <sequence>
        <element name="input1" type="integer"/>
        <element name="input2" type="integer"/>
      </sequence>
    </complexType>
  </element>
</schema>
```

The following example show an abstract definition WSDL document:

```
<?xml version="1.0" encoding="UTF-8" ?>
<definitions name="NestedAsyncFFAdd_RS"
  targetNamespace="http://oracle.com/esb/namespaces/NestedAsyncFFAdd_ESB"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:tns="http://oracle.com/esb/namespaces/NestedAsyncFFAdd_ESB"
  xmlns:inpl="http://xmlns.oracle.com/SynchAdd_ESB">
  <types>
    <schema xmlns="http://www.w3.org/2001/XMLSchema">
<import namespace="http://xmlns.oracle.com/SynchAdd_ESB"
  schemaLocation="SynchAdd_Req.xsd" />
</schema>
</types>
<message name="SynchAdd_ESBProcessRequest_request">
<part name="SynchAdd_ESBProcessRequest"
  element="inpl:SynchAdd_ESBProcessRequest" />
</message>
<portType name="NestedESBAsyncFFAdd_ppt">
<operation name="NestedESBAsyncFFAdd">
<input message="tns:SynchAdd_ESBProcessRequest_request" />
</operation>
</portType>
</definitions>
```

The following example shows a service bindings WSDL document:

```
<?xml version="1.0" encoding="UTF-8" ?>
<definitions targetNamespace="http://oracle.com/esb/namespaces/
  NestedAsyncFFAdd_ESB/concrete"
  xmlns="http://schemas.xmlsoap.org/wsdl/"
  xmlns:tns="http://oracle.com/esb/namespaces/NestedAsyncFFAdd_ESB/concrete"
  xmlns:ws="http://www.example.com/webservice" xmlns:http="http://
  schemas.xmlsoap.org/wsdl/http/"
  xmlns:plt="http://schemas.xmlsoap.org/ws/2003/05/partner-link/"
  xmlns:esb="http://www.oracle.com/esb/" xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/" xmlns:wsdl="http://
  schemas.xmlsoap.org/wsdl/"
  xmlns:import="http://oracle.com/esb/namespaces/NestedAsyncFFAdd_ESB">
<import namespace="http://oracle.com/esb/namespaces/NestedAsyncFFAdd_ESB"
  location="http://bng-psft-
  0100:8888/esb/slide/ESB_Projects/PS_Consumer_NestedAsyncFFAdd_ESB/NestedAsyncFFAdd_
  ESB_NestedAsyncFFAdd_RS.wsdl" />
<binding name="__soap_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt"
  type="import:NestedESBAsyncFFAdd_ppt">
```

```

<soap:binding xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" style="document"
transport="http://schemas.xmlsoap.org/soap/http" />
<operation name="NestedESBAsyncFFAdd">
<soap:operation xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" style="document"
soapAction="NestedESBAsyncFFAdd" />
<input>
<soap:body xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" use="literal" />
</input>
</operation>
</binding>
<binding name="__esb_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt"
type="import:NestedESBAsyncFFAdd_ppt">
<esb:binding />
<operation name="NestedESBAsyncFFAdd">
<esb:operation eventname="
NestedAsyncFFAdd_ESB.NestedAsyncFFAdd_RS.NestedESBAsyncFFAdd" />
<input />
</operation>
</binding>
<service name="ESB_NestedAsyncFFAdd_RS_Service">
<port name="__soap_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt"
binding="tns:__soap_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt">
<soap:address xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
location="http://bng-psft-0100:8888/event/NestedAsyncFFAdd_ESB/
NestedAsyncFFAdd_RS" />
</port>
<port name="__esb_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt"
binding="tns:__esb_NestedAsyncFFAdd_RS_NestedESBAsyncFFAdd_ppt"/>
</service>
<plt:partnerLinkType name="NestedESBAsyncFFAdd_pptLT">
<plt:role name="NestedESBAsyncFFAdd_pptProvider">
<plt:portType name="tns:NestedESBAsyncFFAdd_ppt" />
</plt:role>
</plt:partnerLinkType>

```

Oracle Mediator/ESB WSDL Bindings

A WSDL document binding provides the protocol and data format specification for a particular port type.

Oracle Mediator/ESB WSDL documents can have SOAP bindings or Oracle Mediator/ESB native bindings.

Note: Oracle Mediator/ESB WSDL documents to be consumed by PeopleSoft systems must be of the SOAP type. SOAP binding adhere to the SOAP protocol. Choosing the Oracle Mediator/ESB native binding type may result in unpredictable behavior in PeopleSoft systems.

Asynchronous Request/Response Callback Operations

The WSDL created by Oracle Mediator for asynchronous request/response integrations does not contain a service definition for the callback operation. The PeopleSoft system does not recognize the callback until the service definition is defined.

As a result, save the WSDL document to the file system and add the following section to the WSDL document. Then consume the WSDL document in the Consume Web Services Wizard, selecting the File option when specifying the WSDL source.

```

<wsdl:service name="asynccrrcalcesbcallback_client_ep">
  <wsdl:port name="AsyncRRCalcESBCallback_pt" binding="client:
    AsyncRRCalcESBCallbackBinding">
    <soap:address xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
      location="http://Client.EndPoint.Set.By.Caller"/>
  </wsdl:port>
</wsdl:service>

```

PeopleSoft Integration Broker Consume Services Wizard

To consume Oracle Mediator/ESB-based services use the PeopleSoft Integration Broker Consume Services Wizard. The wizard enables you to consume WSDL provided by integration partners. In turn, the wizard creates PeopleSoft service, service operation, message, and routing definitions for the WSDL, thereby enabling you to manage and invoke the service in PeopleSoft.

See [Understanding the Consume Web Service Wizard](#).

Providing Oracle Mediator/ESB-Based Services for Consuming in PeopleSoft

This section lists the general steps for providing Oracle Mediator/ESB-based services for consuming in PeopleSoft systems. All steps are performed in Oracle Mediator/ESB except where otherwise noted:

1. Create the Mediator/ESB project.

Remember that the type of routing service (synchronous, asynchronous, or asynchronous request/response) you associate to the project determines the project type (synchronous, asynchronous, asynchronous request/response).

2. Register the project with the Oracle Mediator/ESB server.

Use the Oracle Mediator/ESB Console to verify that you successfully registered the project.

3. On the machine on which Oracle Mediator/ESB is deployed, verify that the virtual host and port values are set.

By default the virtual host is set to *localhost*. You must set the virtual host to the IP address or host name.

4. On the Definitions tab, note the WSDL URL of the routing service.

Note: Write down the WSDL URL of the routing service. You must enter this URL in the PeopleSoft system to consume the service.

Consuming Oracle Mediator/ESB-Based Services

To consume WSDL from a Mediator/ESB-based service into the PeopleSoft system, use the Consume Web Service component in the PeopleSoft Pure Internet Architecture.

As you use the Consume Services Wizard keep the following points in mind:

- The source of the WSDL is a WSDL URL. Enter the URL of the routing service that you noted on the Definitions tab in Oracle Mediator/ESB.
- When prompted to select service ports select the service(s) whose name starts with “SOAP.” This ensures that the PeopleSoft system uses the correct binding type to create the routing metadata.
- Make a note of the service operations that you consume. You need these names when you create PeopleCode to create the request message and invoke the service.

- When prompted to select a receiving node select the Use Existing Node option. Next, enter or search for the external node that you created to represent the Mediator/ESB system.
- When consuming asynchronous services you can use the default queue option or select a different queue.

Related Links

[Understanding the Consume Web Service Wizard](#)

Invoking Synchronous Oracle Mediator/ESB-Based Services

This section discusses how to:

- Manage routing definitions for invoking synchronous Oracle Mediator/ESB-based services.
- Set message and error logging for invoking synchronous Oracle Mediator/ESB-based services.
- Invoke a synchronous Oracle Mediator/ESB-based service.

Prerequisites for Invoking Synchronous Oracle Mediator/ESB-Based Services

Before you can invoke a synchronous Oracle Mediator/ESB-based service, you must first consume it. Consuming Oracle Mediator/ESB-based services is described elsewhere in this section.

See [Consuming Oracle Mediator/ESB-Based Services](#).

Managing Routing Definitions for Invoking Synchronous Oracle Mediator/ESB-Based Services

The PeopleSoft Integration Broker Consume Services Wizard creates an outbound routing definition for the consumed service.

Before you invoke a synchronous Oracle Mediator/ESB-based service in the PeopleSoft system, perform these tasks:

1. Access the Routings – Connector Properties page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions**, and click the **Connector Properties** tab).
2. Ensure that the **Connector ID** field is set to *HTTPTARGET*.
3. Ensure that the value in the **Primary URL** field is set to the endpoint URL.
4. Set any other HTTP target connector properties as desired.

Setting Message and Error Logging for Invoking Synchronous Oracle Mediator/ESB-Based Services

To capture the maximum amount of message and error logging and information when you invoke the service, set the following options:

- On the Routings – Routing Definitions page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.) set the value in the **Log Detail** field to *Header and Detail*.

- In the `integrationGateway.properties` file set the `ig.log.level` property equal to 5.

Invoking a Synchronous Oracle Mediator/ESB-Based Service

The following sample PeopleCode demonstrates one way to invoke a synchronous Mediator/ESB-based service:

```
Local string &payload, &responseStr;
Local Message &msg, &reply;
Local XmlDoc &xml;

/* --- set input request message--- */
&payload = "<?xml version='1.0' encoding='UTF-8'?'><SynchAdd_ESBProcessRequest
xmlns='http://xmlns.oracle.com/SynchAdd_ESB'><input1>1234</input1><input2>1234</input2></SynchAdd_ESBProcessRequest>";
MessageBox(0, "Request Message", 0, 0, &payload);

&xml = CreateXmlDoc(&payload);
&msg = CreateMessage(Operation.ESBSYNCCADD, %IntBroker_Request);
&msg.SetXmlDoc(&xml);

&reply = %IntBroker.SyncRequest(&msg);

If All(&reply) Then
    &responseStr = &reply.GenXMLString();
    MessageBox(0, "Request Message", 0, 0, (&responseStr));
Else
    WinMessage("Error. No reply (or NULL) from LaunchSyncESBProcess");
End-If;
```

On execution the system displays the request message that the system sends to Oracle Mediator/ESB. If the invocation is successful, the system displays another box that shows the response from Oracle Mediator/ESB.

Use the PeopleSoft Integration Broker message logs to view the flow of the messages. You can also use the Integration Broker Service Operations Monitor to view information about the outbound transaction.

See [Managing Integration Gateway Message and Error Logging](#) “Viewing Monitor Output for Synchronous Service Operations Data” (Integration Broker Service Operations Monitor).

Use the Oracle Mediator/ESB Console to check for the Mediator/ESB instance and for the successful invocation of the Mediator/ESB service.

Invoking Asynchronous Oracle Mediator/ESB-Based Services

This section discusses how to:

- Create acknowledgements for invoking asynchronous Oracle Mediator/ESB-based services.
- Manage routing definitions for invoking asynchronous Oracle Mediator/ESB-based services.
- Set message and error logging for invoking asynchronous Oracle Mediator/ESB-based services.
- Invoke an asynchronous Oracle Mediator/ESB-based service.

Understanding Invoking Asynchronous Oracle Mediator/ESB-Based Services

An asynchronous service is also referred to as a fire-and-forget service.

Prerequisites for Invoking Asynchronous Oracle Mediator/ESB-Based Services

Before you can invoke an asynchronous Oracle Mediator/ESB-based service, you must first consume it. Consuming Oracle Mediator/ESB-based services is described elsewhere in this section.

See [Consuming Oracle Mediator/ESB-Based Services](#).

Creating Acknowledgments for Invoking Asynchronous Oracle Mediator/ESB-Based Services

To handle acknowledgement data for an asynchronous service operation, create an OnReceive handler that uses the OnAckReceive method that is implemented as an application class. After doing so, you must register the application class with the PeopleSoft service operation.

The following code example shows sample code to create the handler:

```
import PS_PT:Integration:IReceiver;

class AsynchFF_AckReceive implements PS_PT:Integration:IReceiver
    method AsynchFF_AckReceive();
    method OnAckReceive(&MSG As Message) Returns integer;
end-class;

/* constructor */
method AsynchFF_AckReceive
end-method;

method OnAckReceive
    /* + &MSG as Message +/
    /* Returns Integer +/
    /* Extends/implements PS_PT:Integration:IReceiver.OnAckReceive +/
    /* Variable Declaration */

    If &MSG.IsStructure Then

        /* if message is rowset-based */
        Local string &str = &MSG.GenXMLString();

    Else
        /* if message is nonrowset-based */
        Local XmlDoc &xmldoc = &MSG.GetXmlDoc();
        Local string &str1 = &xmldoc.GenXmlString();
        Local File &MYFILE;

        &MYFILE = GetFile("C:\Temp\ESB\PS_Consume\ESBasynchffack.txt", "W",
"UTF8", %FilePath_Absolute);
        If &MYFILE.IsOpen Then
            &MYFILE.WriteString(&str1);
            &MYFILE.WriteLine("");
            &MYFILE.WriteString(String(%Operation_Done));
            &MYFILE.Close();
        End-If;
    End-If;

    Return (%Operation__Done);
end-method;
```

To create an acknowledgement for consumed asynchronous Oracle Mediator/ESB-based services:

1. Create an OnReceive handler that uses the OnAckReceive method that is implemented as an application class.

See [Implementing Handlers Using Application Classes](#).

2. Open the service operation definitions for the consumed service operation.

- Click the **Handlers** tab.

The Service Operations-Handlers page appears.

- Add a handler with the following characteristics:

Field or Control	Description
Name	Enter any name. For example: <i>AckReceive</i> .
Type	From the drop-down list select <i>OnReceive</i> .
Implementation	From the drop-down list select <i>Application Class</i> .
Status	From the status drop-down list select <i>Active</i> .

- Click the **Details** link.

The Handler Details page appears.

- At a minimum enter the following details about the application class:

Field or Control	Description
Package Name	Enter the package name that contains the class that you want to specify.
Path	Enter a colon (:).
Class ID	Enter the name of the application class that contains the method that you want to specify.
Method	From the drop-down list select <i>OnAckReceive</i> .

Managing Routing Definitions for Invoking Asynchronous Oracle Mediator/ESB-Based Services

The PeopleSoft Integration Broker Consume Services Wizard creates an outbound routing definition for the consumed service.

Before proceeding to invoke the service, ensure the following on the routing definition:

- On the Routings-Routing Definitions page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions**.) in the **OnReceive Handler** field, enter or select *OnAckReceive*.

This is the acknowledgement.

- On the Routings-Connector Properties page (**PeopleTools > Integration Broker > Integration Setup > Routing Definitions**. Click the **Connector Properties** tab):
 - Ensure that the **Connector ID** field is set to *HTTPTARGET*.
 - Ensure that the value in the **Primary URL** field is set to the endpoint URL.
 - Set any other HTTP target connector properties as desired.

Setting Message and Error Logging for Invoking Asynchronous Oracle Mediator/ESB-Based Services

To capture the maximum amount of message and error logging and information when you invoke the service, in the integrationGateway.properties file, set the ig.log.level property equal to 5.

A setting of 5 is the default value.

Invoking an Asynchronous Oracle Mediator/ESB-Based Service

The following sample PeopleCode demonstrates one way to invoke the asynchronous Oracle Mediator/ESB-based service:

```
Local string &payload, &responseStr;
Local Message &msg, &reply;
Local XmlDoc &xml;

/* --- setting the input request message --- */

&payload = "<?xml version='1.0' encoding='UTF-8'?><SynchAdd_ESBProcessRequest
xmlns='http://xmlns.oracle.com/SynchAdd_ESB'><input1>6789</input1><input2>6789
</input2></SynchAdd_ESBProcessRequest>";
MessageBox(0, "Request Message", 0, 0, &payload);

&xml = CreateXmlDoc(&payload);

&msg = CreateMessage(Operation.ESBASYNCFADD, %IntBroker_Request);

&msg.SetXmlDoc(&xml);

%IntBroker.Publish(&msg);
&responseStr = &msg.TransactionId;

MessageBox(0, "Message Transaction ID-Response from LaunchAsyncESBProcess", 0, 0,
    &responseStr);

MessageBox(0, "Acknowledgement from ESB", 0, 0, "For Ack Msg from ESB ,
    go look at the file C:\temp\ESB\PS_Consume\ESBasynchffack.txt");
```

When you execute the PeopleCode the PeopleSoft system the following information in consecutive message boxes:

1. The request message that it sends to Oracle Mediator/ESB.
2. The transaction ID for the asynchronous request.
3. The file location of the acknowledgement it received from Oracle Mediator/ESB

You can use the PeopleSoft Integration Broker message logs to view the flow of the messages. You can also use the Integration Broker Service Operations Monitor to view information about the outbound transaction.

You can also use the Oracle Mediator/ESB Console to check for the message instance and for the successful invocation of the Mediator/ESB service.

See [Managing Integration Gateway Message and Error Logging](#) “Monitoring Asynchronous Service Operation Transactions” (Integration Broker Service Operations Monitor).

Invoking Asynchronous Request/Response Oracle Mediator-Based Services

This section discusses invoking asynchronous request/response Oracle Mediator-based services.

Prerequisites for Invoking Asynchronous Request/Response Oracle Mediator-Based Services

Before you can invoke an asynchronous Oracle Mediator/ESB-based service, you must first consume it. Consuming Oracle Mediator/ESB-based services is described elsewhere in this section.

See [Consuming Oracle Mediator/ESB-Based Services](#).

Invoking an Asynchronous Request/Response Oracle Mediator-Based Service

To invoke an asynchronous request/response Oracle Mediator-based service, you must use an OnResponse handler. The following code shows a sample OnResponse handler:

```
import PS_PT:Integration:INotificationHandler;
import PT_ESB:ESBUtil;

class Esb_AsyncRR implements PS_PT:Integration:INotificationHandler
  method Esb_AsyncRR();
  method OnResponse(&MSG As Message);
end-class;

/* constructor */
method Esb_AsyncRR
end-method;

method OnResponse
  /+ &MSG as Message +/

  Local Message &request, &response;
  Local File &MYFILE;
  Local XmlDoc &xml, &inxml;
  Local string &payload, &oper, &input1, &input2, &result_st;
  Local integer &result_no;
  Local array of XmlNode &nodelist;
  Local XmlNode &node;
  Local PT_ESB:ESBUtil &obj = create PT_ESB:ESBUtil();
  &nodelist = CreateArray(&node);
  &request = &MSG;
  &inxml = &request.GetXmlDoc();
  &nodelist = &inxml.GetElementsByTagName("input1");
  &input1 = &nodelist [1].NodeValue;
  &nodelist = &inxml.GetElementsByTagName("input2");
  &input2 = &nodelist [1].NodeValue;
  &result_no = Integer(&input1) * Integer(&input2);
  &result_st = String(&result_no);

  &payload = "<?xml version='1.0'?><PSFTCalcResponseMessage xmlns='
http://xmlns.oracle.com/Enterprise/Tools/schemas/PSFTCALCRESPONSEMESSAGE.V1'>
<result>" | &result_st | "</result></PSFTCalcResponseMessage>";
  &xml = CreateXmlDoc(&payload);
  &response = CreateMessage(Operation.ESBASYNCR, %IntBroker_Response);
```

```
&response.SetXmlDoc(&xml);  
&response.IBInfo.WSA_MessageID = &request.IBInfo.WSA_MessageID;  
&response.IBInfo.WSA_ReplyTo = &request.IBInfo.WSA_ReplyTo;  
  
&obj.UpdateConnectorResponseProperties(&response);  
&IntBroker.Publish(&response);  
  
end-method;
```

Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB

This section discusses how to:

- Provide PeopleSoft services to Oracle Mediator/ESB.
- Invoke PeopleSoft services in Oracle Mediator/ESB.

Understanding Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB

This section provides an overview of providing and invoking PeopleSoft services in Oracle Mediator/ESB.

Oracle Mediator/ESB Projects When PeopleSoft is a Provider

To invoke a PeopleSoft service in Oracle Mediator/ESB, you must create a project in Oracle Mediator/ESB.

See *Oracle Mediator Quick Start Guide*.

See *Oracle Enterprise Service Bus Quick Start Guide*.

PeopleSoft Integration Broker Provide Services Wizard

To provide PeopleSoft services to Oracle Mediator/ESB you use the PeopleSoft Integration Broker Provide Services Wizard. The wizard enables you to generate WSDL documents based on services you create in PeopleSoft Integration Broker. You then provide the generated WSDL to Oracle Mediator/ESB.

Prerequisites for Providing and Invoking PeopleSoft Services in Oracle Mediator/ESB

You must create the PeopleSoft services you wish to provide, prior to using generating WSDL and providing the WSDL to Oracle Mediator/ESB.

Other prerequisites may exist in Oracle JDeveloper or Oracle Mediator/ESB. Refer to the Oracle documentation for more information.

Providing PeopleSoft Services

Use the PeopleSoft Integration Broker Provide Web Service Wizard to generate a WSDL document for the service you wish to provide to Oracle Mediator/ESB.

The wizard provides you the option to publish the WSDL to a UDDI repository that you define, or to the WSDL repository in PeopleSoft Integration Broker. You can choose either publishing option.

The last page is the WSDL Generation Log which provides the name of the services and URL for each WSDL document generated. You will use this information when you invoke the services in Oracle Mediator/ESB.

Related Links

[Providing Non-REST Web Services](#)

[Providing REST Web Services](#)

[Providing OpenAPI REST Web Services](#)

Invoking PeopleSoft Services in Oracle Mediator/ESB

This section describes how to invoke synchronous and asynchronous services in Oracle ESB.

Creating a Mediator/ESB Project to Invoke PeopleSoft Services

After you use the PeopleSoft Integration Broker Provide Web Service wizard to generate WSDL, the next step is to invoke the services in Oracle Mediator/ESB. To do so, you must create a Mediator/ESB project type in Oracle JDeveloper.

See *Oracle Mediator Quick Start Guide*.

See *Oracle Enterprise Service Bus Quick Start Guide*.

The following are general steps to follow to configure the Oracle Mediator/ESB project after you initially create it. Refer to the Oracle documentation for detailed information and instructions:

1. Modify the project so that the SOAP service points to the PeopleSoft WSDL URL generated when you provided the service in PeopleSoft,
2. Use the Make option to build the project.
3. Use the Register with Mediator/ESB option to register the project with Oracle Mediator/ESB.

This command allows you to register the services created using Oracle JDeveloper to Oracle Mediator or the Oracle Enterprise Service Bus.

A message appears that indicates you successfully registered the services with the Oracle Mediator/ESB server.

To view, monitor or make runtime adjustments to the Mediator/ESB configuration, use the Oracle Mediator/ESB Console.

When you have successfully registered the services on the Oracle Mediator/ESB Server, you can view them in the Services Panel in Oracle JDeveloper. Click the Mediator/ESB system to view the Mediator/ESB system flow in the Configuration Area on the right side.

Invoking a Service in Oracle

As of the publication date of this product documentation Oracle Mediator/ESB does not feature a test page. To test and invoke Mediator/ESB web services, use the Oracle SOA Suite's Oracle Enterprise Manager.

See the product documentation for Oracle Enterprise Manager.

Using the Inbound File Loader Utility

Understanding the Inbound File Loader Utility

When external systems send inbound transactions consisting of flat files, you can use the Inbound File Loader utility to translate the incoming files into service operations and process them.

The Inbound File Loader utility provides two options for translating and processing files:


- Use PeopleSoft Integration Broker to convert file data into service operations and publish them locally. Then, subscribe to the service operations and insert the data into the tables.
- Write an application class that will read the contents of files and insert the data directly into the tables

Note: You can only use one processing method at any given time. Application class processing always overrides PeopleSoft Integration Broker processing.

File Processing

This section discusses the processing flow for the Inbound File Loader utility.

This diagram illustrates the processing of index files and flat files in the Inbound File Loader utility.

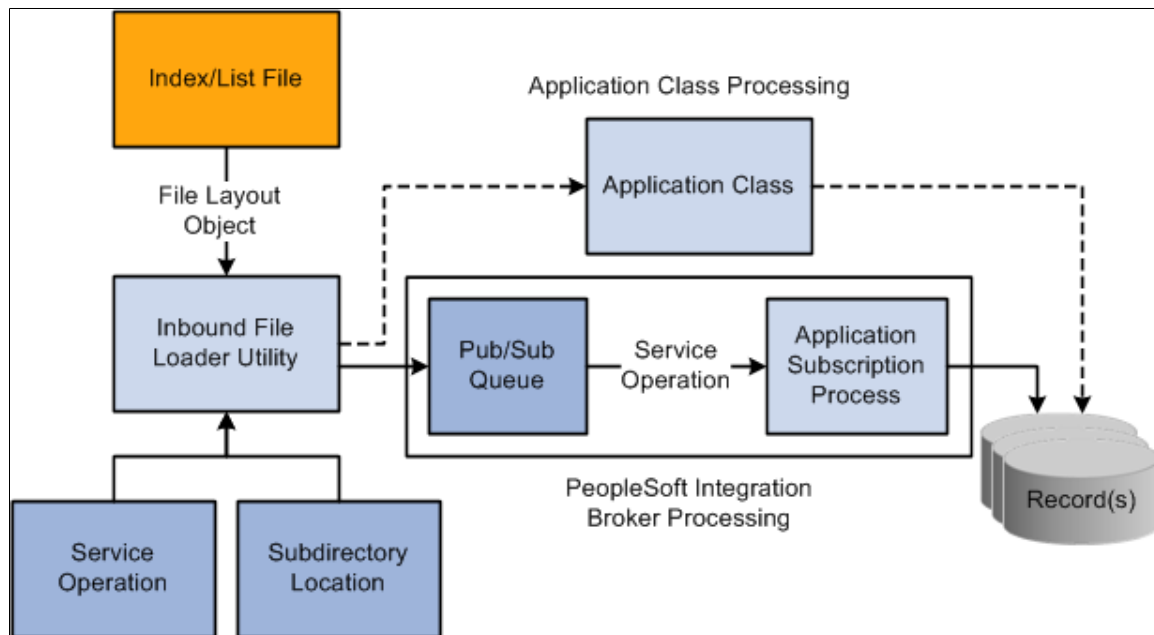

The flow for inbound file processing using the Inbound File Loader utility is:

1. The utility receives a flat file in the form of a file layout object from an external system.

The flat file consists of either:

- A data file that contains the relevant data.
- An index file that contains pointers to the data.

Each index file lists the names of a set of data files to be processed. Each line of the index file must be a plain text file that contains only one field: a file name with full directory path information.

These files contain the application data, which is in one of the following formats: fixed record, Comma Separated Values (CSV), or XML.

Note: The wildcards “*” and “?” may only be used in the filename and not in the directory path.

2. The utility reads the file that is submitted for processing:

- If the file is an index file, the Inbound File Loader utility loads the list of data files that are associated with each index file to be processed into a parameter table.
- If it is a single data file, the utility inserts the single data file into a parameter table.

Note: If additional fields in the file layout are not in the message definition, the additional fields are ignored during the copying of the flat file data to the message and are not included in the message.

3. The utility loops through the list of data files to be processed and reads each data file.

4. The utility uses either PeopleSoft Integration Broker or application class processing logic to read the file contents and process the data.

- PeopleSoft Integration Broker processing.

When using Integration Broker processing logic, the Inbound File Loader utility copies the rowsets of the data files into the message, publishes the service operation locally, and then the receiving system receives the service operation and initiates normal inbound data processing.

- Application class processing.

You can build an application class to read the contents of the inbound file as rowsets and implement the necessary processing logic to write to the underlying tables.

5. To add file archiving, delete logic to prevent files from processing again, and so on, when defining processing rules, you can optionally specify an application engine program name and section. If specified, the utility calls the program and section as a final step to the inbound file process.

Understanding Development Activities

This section discusses development activities for using the Inbound File Loader utility and describes:

- General development activities
- Development activities for PeopleSoft Integration Broker processing.
- Creating file layout definitions.
- Development activities for application class processing.

General Development Activities

This section discusses general development activities for using the Inbound File Loader utility using either PeopleSoft Integration Broker processing or application class processing.

Determining the Format for Inbound Data

Determine the necessary format of the inbound data. If there is an industry standard, use it for your file definition. If there is no industry standard, create a file layout object.

Development Activities for PeopleSoft Integration Broker Processing

This section discusses development activities for using the PeopleSoft Integration Broker processing in conjunction with the Inbound File Loader utility.

1. Create a message definition in the PeopleSoft Pure Internet Architecture.

The structure of the message definition must be similar to the structure of the file layout definition that you created.

2. Create a service.
3. Create an asynchronous one-way service operation for the service.
4. Create a local-to-local routing definition for the service operation.
5. Create an OnNotification handler and call the functional library IB_FILE_SUBCODE.

PeopleTools delivers this functional library and it can be used for any generic notification.

The following example shows code an OnNotification handler calling the functional library:

```
import PS_PT:Integration:INotificationHandler;

class QUSubscribe implements PS_PT:Integration:INotificationHandler
  method QUSubscribe();
  method OnNotify(&_MSG As Message);
end-class;

Declare Function Subscribe PeopleCode FUNCLIB_IBFILE.IB_FILE_SUBCODE FieldForm⇒
ula;

/* constructor */
method QUSubscribe
end-method;

method OnNotify
  /*+ &_MSG as Message */
  /*+ Extends/implements PS_PT:Integration:INotificationHandler.OnNotify */
  /* Variable Declaration */
```

```

Local Message &MSG;
Local Rowset &MSG_ROWSET;

&MSG = &_MSG;

Subscribe (&MSG);

end-method;
```

6. Define processing rules in the Inbound File Loader Rules page in the PeopleSoft Pure Internet Architecture.
7. Initiate flat file processing using the Inbound File Processing page.
8. Test the inbound flat file processing.

Creating File Layout Definitions

When you use the Inbound File Loader utility, you use file layout definitions to read and write data from flat files. Use the following guidelines when creating file layout definitions:

- Create a file layout definition with the same structure as the message definition to support the vendor file format.
- The hierarchical structure of the data in the file layout definition must match that of the message definition. For example, suppose a message has three levels:
 - Level 0, containing record A.
 - Level 1, containing records B and C.
 - Level 2, containing record D.

All file layouts that are associated with this message must also have record A in level 0, record B and C in level 1, and record D in level 2.

Note: The file layout does not need to contain the exact same fields as the message definition

- For every record in a file layout definition, add a new file field, AUDIT_ACTN, as the first field in the record (except when the field already exists in the application table).
- You can associate more than one file layout to a single message. For example, vendor A may have a different number of fields than vendor B, so you may have two file layouts: one for vendor A and one for vendor B.
- Specify the file ID uniquely to include a row in a file, which is necessary in mapping the data to its proper record. Include start and end points when dealing with more than one record in a file layout.
- Each record in the file layout has a file record ID attribute. Do not confuse this with the file layout ID. The file layout ID determines whether a new layout is encountered for multiple file layout processing.

Development Activities for Application Class Processing

This section discusses development activities for application class processing using the Inbound File Loader utility. This section discusses how to:

1. Create an application class.
2. Specify processing rules.

Creating Application Classes

This section discusses creating an application class for processing flat files in conjunction with the Inbound File Loader utility.

The application class you create must implement the `IProcessFile` interface. The signature of the interface is shown here:

```
interface IProcessFile
    /* Any initialization is done in this function*/
    method Init (&fldDefName As string, &msgName As string) Returns boolean;

    /* Contains processing logic that stores the Rowset data into the respective tables⇒
    */
    method Process(&fldDefName As string, &msgName As string, &rs As Rowset) Returns bo⇒
    olean;

    /* This method shall contain logic for cleanup operations */
    method Finish(&fldDefName As string, &msgName As string) Returns boolean;
end-interface;
```

The application class you create must implement the following three methods:

- Init
- Process
- Finish

If the **Replace Data** check box is selected in the Inbound File Loader Rule page, the Init method will be called. The Finish method is the last method to be invoked by the utility. Any post-processing clean up code can be implemented with this function.

The logic in the Process method stores the file contents in staging tables. You can add logic in the Finish method to move the data from staging tables to the actual transaction tables as a final process.

The Init, Process and Finish methods must return a boolean value of *True* for successful completion of the file processing. If methods Init and Finish are not used, return a default value of *True*.

The following example shows an application class implementing the `IProcessFile` interface:

```
import PTIB:Interfaces:IProcessFile;

class InboundFileProcess implements PTIB:Interfaces:IProcessFile

method Init(&fldDefName As string, &msgName As string) Returns boolean;

method Process(&fldDefName As string, &msgName As string, &rs As Rowset) Returns bo⇒
olean;

method Finish(&fldDefName As string, &msgName As string) Returns boolean;

end-class;

method Init
    /*+ &fldDefName as String, +/
```

```

        /+ &msgName as String +/
        /+ Returns Boolean +/
    /+ Extends/implements PTIB:Interfaces:IProcessFile.Init +/

    //This function will be called when the Replace Data flag is
    //enabled
    //add initialization code, such as cleaning up the table before
    //reading in the data from the file

    Return True;
end-method;

method Process
    /+ &fldDefName as String, +/
    /+ &msgName as String, +/
    /+ &rs as Rowset +/
    /+ Returns Boolean +/
    /+ Extends/implements PTIB:Interfaces:IProcessFile.Process +/

    //Add the code that inserts/updates/delete data in the table

    Return True;
end-method;

method Finish
    /+ &fldDefName as String, +/
    /+ &msgName as String +/
    /+ Returns Boolean +/
    /+ Extends/implements PTIB:Interfaces:IProcessFile.Finish +/

    //This function will be called when the Replace Data flag is
    //enabled
    // Clean up logic goes here (if any)

    Return True;
end-method;

```

Specifying Processing Rules

After you create an application class, you must access the Inbound File Loader Rules page and specify the following information:

- Root Package ID.
- Path.
- Class name.

Prerequisites for Using the Inbound File Loader Utility

The prerequisites for using the Inbound File Loader utility are:

- PeopleSoft Integration Broker must be configured and running.
- PeopleSoft Process Scheduler must be configured in PSAdmin.
- Create a file definition layout as described previously in this topic.

See [Creating File Layout Definitions](#).

- If using PeopleSoft Integration Broker processing, complete the development activities for PeopleSoft Integration Broker processing described previously in this topic.

See [Development Activities for PeopleSoft Integration Broker Processing](#).

- If using application class processing develop an application class that implements the IProcessFile interface and specify the processing rules as described previously in this topic.

See [Development Activities for Application Class Processing](#).

Setting Up Inbound File Loader Processing Rules

This section discusses how to set up inbound flat file processing rules.

Understanding Setting Up Inbound File Loader Processing Rules

The Inbound File Loader utility uses information you define in the Inbound File Loader Rules page to determine the file layout and message combination, as well as other file attributes necessary for processing files.

Setting Up Inbound File Loader Processing Rules

Use the Inbound File Loader Rules page (PSIBINFILERULE) to specify the file layout and message to process, as well as define the parameters for processing. To access the page, select **PeopleTools** > **Integration Broker** > **File Utilities** > **Inbound File Loader Rules**.

This example illustrates the fields and controls on the Inbound File Loader Rules page. You can find definitions for the fields and controls later on this page.

Inbound File Loader Rules

File Identifier: TEST

Processing Options

***Inbound File:**

File Type

☒ Data File
☐ Index File

File Layout ID:

***Status:** Inactive

Message Options

☐ Replace Data

Publish From:

Alternate Processing

Root Package ID:

Path:

Class Name:

Post-Processing

Program Name:

Section:

File Layout Mappings

Customize | Find | View All |

First 1 of 1 Last

Sequence	*Definition Name	*Service Operation		
	m	m	+	-

Note: You can process multiple inbound flat files at one time. By specifying an inbound index file as part of the Inbound File Loader utility parameters. The system reads all input files within the index file and uses the associated file layout object and message to convert the data. Similarly, specify a wildcard in the filename in the inbound file rule component, but make sure that all files that meet the wildcard criteria correspond to the file layout and message mapping that are defined.

Field or Control	Description
File Identifier	Displays the inbound file that you are associating with the rule.
Inbound File	Enter the index file name or the data file name of the inbound file to process. Specify the full path information. The PeopleCode program uses the <i>%filepath_absolute</i> variable when opening the file.
File Type	In the File Type section, select the type of inbound file. The options are: • <i>Data File.</i> • <i>Index File.</i>
File Layout ID	(Optional.) Enter a file layout ID to associate with the file. The file layout ID is used in a multiple file layout processing. This identifier indicates that the data that follows belongs in a new file layout.
Status	From the Status drop-down list, select whether this inbound file rule is active. The valid options are: • <i>Active.</i> • <i>Inactive.</i> (Default.)
Replace Data	Select the check box to indicate that the inbound file processing is a destructive load process. A destructive load process involves replacing the contents of the tables with new data from the file being processed. In a destructive load process, the service operations must be subscribed in the same order as they are published to ensure transactional integrity. If this check box is selected, the utility publishes a header message. The header message is a trigger in the subscription process to initialize tables before receiving the data messages. The subscription PeopleCode logic must check for the header message and perform any cleanup operation . The utility then publishes data messages containing the data followed by a Trailer Message. The trailer message is used as a trigger in the subscription process to indicate that all the data messages have been received. If the Replace Data check box is not selected, only data messages are published. When used in the context of application class processing, if the Replace Data flag is selected, the Init() and Finish() methods of the specified application class are invoked.

Field or Control	Description
Publish From	Select the name of the publishing node. Use this option to simulate an inbound asynchronous transaction from an external node. While using this feature, you must create an inbound asynchronous transaction on the node from where the message is published.
Root Package ID	Select the root package ID of the application class.
Path	Select the qualifying path of the application class.
Class Name	Select the application class name that contains the file processing logic.
Program Name andSection	Select a PeopleSoft Application Engine program and section to invoke when the utility finishes processing data.
Definition Name	Specify the file layout definition for the file(s) being processed. If the File Layout ID field is blank, this field should contain only one entry. If the File Layout ID field is not blank, this scroll area must contain an entry for each file layout definition name that is specified in the inbound file.
Service Operation	For every row in this scroll area, specify a service operation. The utility uses the message(s) defined within the service operation to copy the file rowsets into message rowsets

Note: Use the wildcards “*” and “?” for the file name but not for the directory path. The file layout and service operation must be valid for all files that meet the wildcard criteria.

Initiating File Processing

This section discusses how to initiate inbound flat file processing.

Understanding Initiating File Processing

The Inbound File Processing page runs the Application Engine process PTIB_INFILE that initiates the file-to-message processing. The file-to-message processing function reads the file rowset and publishes it as a message.

If an index file exists when the inbound conversion process runs, the application engine program loads the list of files to be converted into a parameter table and completes a commit. The application engine program uses the list of files within the parameter table to restart the processing if a particular flat file fails. If a single data file is provided, then the rowset processing immediately begins.

The file publish process goes through each of the rowsets of the file layout and copies them into the message row sets.

If the audit action (AUDIT_ACTN) exists in the file, it is copied to the PSCAMA record. If the audit action does not exist in the file, the publishing process uses the default value that is specified in the file layout field property.

The Inbound File Loader utility publishes a new message when one of the following exists:

- The size of the data in the service operation exceeds the value of the **Maximum Message Size** field set in the PeopleTools Options page.

To view the value in the field, select **PeopleTools > Utilities > Administration > PeopleTools Options**.

- A new file layout is detected.
- End of file is reached.

The application engine program completes a commit every time a message is published from a file. After conversion, the flat file remains in the parameter table with a status of *Processed*.

Note: The file layout should exactly match the message layout (excluding the PSCAMA record) and should use the same character set as that used by the file: either American National Standards Institute or Unicode.

Initiating Inbound Flat File Processing

Use the Inbound File Processing page (PSIBFILERUNCNTL) to initiate flat file processing. Select **PeopleTools > Integration Broker > File Utilities > Inbound File Processing**.

This example illustrates the fields and controls on the Inbound File Processing page. You can find definitions for the fields and controls later on this page.

Field or Control	Description
Request ID	Enter a unique identifier to track the request.
Process Frequency	Select the frequency for processing the file. The options are: <i>Process Once.</i> <i>Always.</i> <i>Don't Run.</i>
File Identifier	Select or enter the name of the file identifier that you set up in the Inbound File Loader Rules. page. The file identifier is tied to the publish rules.
Index Flag	A read-only field that indicates if the file being processed is an index file or a data file. When checked, the Inbound File Loader utility is processing an index file.
File Layout ID	A read-only field that displays the file layout ID associated with the file in the Inbound File Loader Rules page.
Inbound File	A read-only field that displays the name of the file being processed.

Testing Inbound Flat File Processing

To test inbound files:

1. Create a sample flat file, or ask the third-party vendor for a sample flat file.
2. Set up processing rules for the test.

Select **PeopleTools > Integration Broker > File Utilities > Inbound File Loader Rules** to access the Inbound File Loader Rules page.

See [Setting Up Inbound File Loader Processing Rules](#).

3. Initiate file processing.

Select **PeopleTools > Integration Broker > File Utilities > Inbound File Processing** to access the Inbound File Processing page.

See [Initiating Inbound Flat File Processing](#).

4. Verify the inbound processing created a message that contains the sample flat file data.
 - a. If you used application class processing, verify if the production or staging tables are loaded with the correct field values. For production tables, look in the PeopleSoft application pages. For staging tables, use either the PeopleSoft application pages or run a query by using PeopleSoft Query.
 - b. If you used PeopleSoft Integration Broker for file processing, use the Service Operations Monitor to ensure the inbound file processing created a service operation that contains the sample flat file data.

Verify that the standard inbound notification process received the message and processed it into the application tables.

Determine whether the values become the inherited values (if you used the inherited value feature in file layout).

Validate that the production or staging tables loaded with the correct field values. For production tables, look in the PeopleSoft application pages. For staging tables, use either the PeopleSoft application pages or run a query by using PeopleSoft Query.

Ensure that the date formats conform.

Using the Application Services Framework

Understanding the Application Services Framework

The Application Service Framework is used to create and maintain REST web services as Open API services. The Application Services Designer simplifies the process of maintaining REST services and enforces naming standards.

Prior to PeopleTools 8.60 only Provider REST web services were supported, starting with PeopleTools 8.60 Consumer REST web services are supported.

Note: Chatbot services created in PeopleTools release prior to 8.59 will require conversion. See [Converting Chatbot Services](#).

Generic Naming Standards

Application Services must adhere to generic naming standards. The generic naming standards applies to resource names, property names and so forth as well as REST Service URIs (Service URL ID).

General Naming Standards:

- Names must be semantically precise and reflect their content without ambiguous or unnecessary qualifiers.
- Names should be camel case, no hyphens, no underscores, no numbers unless it is semantically meaningful.

Root Resource names:

- Follow the general naming standard.
- Start with lower case letter, such as orders.
- It is desirable to use all lower case letters for consistency.
- No two resources can have the same resource name, ignoring case difference.

Field Naming Standards:

- Field names must follow the general naming standard. Field names should start with a lower case letter.
- The primary identifier field should have "Id" name suffix (or just "id" if desirable).
- Recommendation: A field that takes a Boolean value should have "Flag" as a suffix in the name.
- Recommendation: A field that indicates a user should use "By" as a suffix, such as lastUpdatedBy.

Managing Application Services

Searching for Application Service

Use the Application Services Search page to create an Application Service, create a Service Alias for an Application Service or edit an existing Application Service.

Select **PeopleTools > Integration Broker > Application Services > Manage Application Services**.

This example illustrates the fields and controls on the Application Service Search page. You can find definitions for the fields and controls later on this page.

Search								
> Search Criteria								
Create Application Service								
Application Services								
App Service ID	Type	Category	IB Service Name	Service URL ID	Service Group	Description	Status	Create Service Alias
MUSIC_CONSUMER	Primary	Consumer	MUSIC_CONSUMER_ASF	musiccon	Utility	Consumer REST Service that calls the MUSIC Provider Service.	Active	>
MUSIC	Primary	Provider	MUSIC_ASF	music		This service will update music.	Active	Create Service Alias >
PETSTORE	Primary	Provider	PETSTORE_ASF	pets		pet store services	Active	Create Service Alias >

You can search for Application Services using the App Service ID, Service Type, Service URL ID, Service Group, Service Category, or all of these values. Permission to view Application Services is based standard component/page security.

Click on the ID to open an existing application service.

The Create Service Alias button only applies to Provider Application Services. This button is greyed out if an Alias already exists for a Primary Application Service. An Application Service of type Alias cannot have an associated Alias, therefore there is no Create Service Alias button for that row.

For more information on Service Alias see [Creating Service Alias](#).

Creating Application Class

For Provider Application Services, create an application class extending the PTCBAPPLSVCDEFN:ApplicationServiceBase application class and then implement the invokeService() method to define your application logic.

Use the %This.ServiceAPI property to read and write parameters and other Application Services metadata.

The following methods are used in the example code. This list does not include all the Application Services methods. See “ServiceAPI Methods” (PeopleCode API Reference) for information on all methods available and additional information on the methods listed below.

Method	Use this method to
getInputParameter	retrieve input value based on parameter defined on the application service.
getOutputParameter	retrieve output value based on parameter.
getOutputRow	retrieve the specified output message row based on the index.
getTemplateParameter	retrieve template value based on parameter defined on the application service.
InsertOutputRow	insert an empty message row.
setInputParameter	set input value based on parameter defined on the application service.
setOutputParameter	set output value based on parameter defined on the application service.
setResponseHeader	set the response header value based on header defined on the application service.

The following properties are used in the example code. This list does not include all the Application Services properties. See “ServiceAPI Properties” (PeopleCode API Reference) for information on all methods available and additional information on the properties listed below.

Property	Use this property to
HttpMethod	return the HTTP method that was invoked for the transaction.
InputRows	get values on the specified row.
OutputRows	set values on the specified row.
ResultState	set the result state to be returned for the request.
URIIndex	return the URI index that is invoked as defined on the application service.

Example Application Class for GET Method

The Application Service for this example has the following:

- URI Template is band{instrument}/{timein}
- Method is GET with Multi Row Output

Note: The code for single row output is shown commented out.

- Output Parameters are:

- instrument
- numPlayers
- playdate
- timeout

```
import PTCBAPPLSVCDEFN:ApplicationServiceBase;

class EXAMPLE1 extends PTCBAPPLSVCDEFN:ApplicationServiceBase
    method invokeService();
end-class;

method invokeService
    /* Extends/implements PTCBAPPLSVCDEFN:ApplicationServiceBase.invokeService */
    Local string &Inst, &httpMethod, &name;
    Local integer &UriIndex, &age;
    Local time &timein;
    Local date &datein;

    &httpMethod = %This.ServiceAPI.HttpMethod;
    &UriIndex = %This.ServiceAPI.URIIndex;

    If &httpMethod = "GET" Then
        If &UriIndex = 1 Then
            /*****Fetching value of template parameters*/
            &Inst = %This.ServiceAPI.getTemplateParameter("instrument");
            &timein = %This.ServiceAPI.getTemplateParameter("timein");

            <* Setting values for output parameters single row
            %This.ServiceAPI.setOutputParameter("numPlayers", 10);
            %This.ServiceAPI.setOutputParameter("instrument", &Inst);
            %This.ServiceAPI.setOutputParameter("playdate", %Date);
            %This.ServiceAPI.setOutputParameter("timeout", &timein); *>

            /*****setting values for output parameters (multi-row) */
            %This.ServiceAPI.insertOutputRow();
            %This.ServiceAPI.OutputRows [1].setParameter("numPlayers", 10);
            %This.ServiceAPI.OutputRows [1].setParameter("instrument", &Inst);
            %This.ServiceAPI.OutputRows [1].setParameter("playdate", %Date);
            %This.ServiceAPI.OutputRows [1].setParameter("timeout", &timein);

            %This.ServiceAPI.insertOutputRow();
            %This.ServiceAPI.OutputRows [2].setParameter("numPlayers", 6);
            %This.ServiceAPI.OutputRows [2].setParameter("instrument", &Inst);
            %This.ServiceAPI.OutputRows [2].setParameter("playdate", %Date);
            %This.ServiceAPI.OutputRows [2].setParameter("timeout", &timein);

            /*****Setting Value of Result States to denote logical conclusion for
            the service execution */
            %This.ServiceAPI.ResultState = "SUCCESS - PLAY MUSIC";
```

```

        End-If;
    End-If;
end-method;

```

Example Application Classes that includes GET and POST

The Application Service for this example has the following:

- URI Template is band{instrument}/{musicCode}
- GET method has Multi Row Output with following output parameters:
 - instrument
 - numPlayers
- Post method Input parameters
 - instrument
 - player
- POST method output parameters
 - results
 - tool

```

import PTCBAPPLSVCDEFN:ApplicationServiceBase;

class example2 extends PTCBAPPLSVCDEFN:ApplicationServiceBase
    method invokeService();
end-class;

method invokeService
    /*+ Extends/implements PTCBAPPLSVCDEFN:ApplicationServiceBase.invokeService +/
    Local string &Inst, &Inst1, &httpMethod, &name, &headervalue, &results, &tool, &⇒
    player;
    Local integer &UriIndex, &age;
    Local time &timein;
    Local date &datein;
    Local array of any &code;

    &httpMethod = %This.ServiceAPI.HttpMethod;
    &UriIndex = %This.ServiceAPI.URIIndex;

    If &httpMethod = "GET" Then
        If &UriIndex = 1 Then
            /****Fetching value of template parameters*/
            &Inst = %This.ServiceAPI.getTemplateParameter("instrument");
            rem &timein = %This.ServiceAPI.getTemplateParameter("timein");
            &code = %This.ServiceAPI.getTemplateParameter("musicCode");

            /****setting values for output parameters (multi-row) */
            %This.ServiceAPI.insertOutputRow();
            %This.ServiceAPI.OutputRows [1].setParameter("numPlayers", 10);
            %This.ServiceAPI.OutputRows [1].setParameter("instrument", &Inst);

            %This.ServiceAPI.insertOutputRow();

```

```

%This.ServiceAPI.OutputRows [2].setParameter("numPlayers", 6);
%This.ServiceAPI.OutputRows [2].setParameter("instrument", &Inst);

/****Setting Value of Result States to denote logical conclusion for
the service execution */
%This.ServiceAPI.ResultState = "SUCCESS - PLAY MUSIC";

End-If;
End-If;

If &httpMethod = "POST" Then
  If &UriIndex = 1 Then

    /* read request header */
    &headervalue = %This.ServiceAPI.getRequestHeaderValue("Accept-Language");

    /* set response header for location */
    %This.ServiceAPI.setResponseHeader("Type", "Woodwind");

    /****Fetching value of template parameters*/
    &Inst = %This.ServiceAPI.getTemplateParameter("instrument");
    &code = %This.ServiceAPI.getTemplateParameter("musicCode");

    /****Fetching values for multi-row input parameters*/
    &player = %This.ServiceAPI.InputRows [1].getParameter("player");
    &Inst = %This.ServiceAPI.InputRows [1].getParameter("instrument");

    &player = %This.ServiceAPI.InputRows [2].getParameter("player");
    &Inst1 = %This.ServiceAPI.InputRows [2].getParameter("instrument");

    /****setting values for output parameters (single row) */
    %This.ServiceAPI.setOutputParameter("results", "OK");
    %This.ServiceAPI.setOutputParameter("tool", "860");

    /****Setting Value of Result States to denote logical conclusion for
the service execution */
    %This.ServiceAPI.ResultState = "Success";
  End-If;
End-If;

end-method;

```

Creating a New Provider Application Service

This topic provides the steps necessary to create a Provider Application Service.

Creating a Provider Application Service involves the following steps:

1. Create an Application Class that extends the PTCBAPPLSVCDEFN:ApplicationServiceBase application class and then implement the invokeService() method. %this.ServiceAPI property is the delivered API to read and write parameters, headers and access other metadata.

See [Creating Application Class](#)

2. Create Application Service.

The General Information page defines the App Service ID, Service URL ID and a description. The Service Category is Provider.

3. Create or import a root resource.

4. Add URI templates.
5. Add base template parameters to URI Template.
6. Add method to URI template.
7. Add input and output parameters to method.
8. Optionally assign headers for the method.
9. Define result states for the method.

Creating the Provider Application Service

To create a new Provider Application Service:

1. Select **PeopleTools > Integration Broker > Application Services > Manage Application Services**.
2. Click Create Application Service.

This example illustrates the fields and controls on the Application Services – General Information page. You can find definitions for the fields and controls later on this page.


Field or Control	Description
App Service ID	Service ID for the Application Service.
Service Type	When you create a new Application Service, the default Service Type is Primary. When you create an Alias from an existing Application Service, the default Service Type is Alias.
Service URL ID	Service URL ID forms a part of the endpoint URL. It identifies the service to be executed.

Field or Control	Description
Status	By default the status is Active.
Enable SSL	Requires SSL for the Service to be invoked.
Support XML	Selects XML as an optional data source.
Service Category	By default the Service Category is Provider.
Service Group	Used to group services together for search. Also used as part of the Discovery Service for module name for grouping of services.
Export Service	Indicates if the service has been exported. Note: This field is displayed after you save the Application Service.
Owner ID	Owner of the Application Service.
Description	A description for the Application Service.

The Save action will perform the following:

- Verify that the *Service URL ID* value meets the Oracle standard for an URL value. If valid, the value will then be checked against Integration Broker Service Alias's to insure it is unique. If the value does not meet this criteria, a pop up message will be displayed.

This example illustrates the Service URL ID validation message.

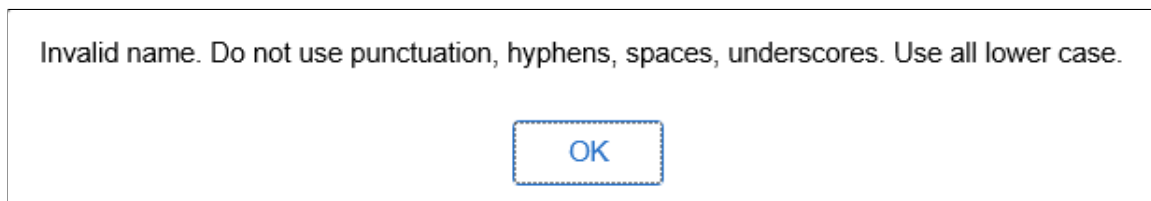

Correct the Service URL ID and save the application service.

- When the *Service URL ID* is valid, save processing will generate the necessary IB metadata, update the Service Name and enable the Create Root Resource and Import Root Resource buttons.

This example illustrates the fields and controls on the Application Service page after Save. You can find definitions for the fields and controls later on this page.

Application Service

Search

Application Service

Base Parameters

Base Template Parameters

Summary

Application Service - MUSIC_ASF

Save

General Information

Service Type

Primary

Service URL ID

music

IB Service Name

MUSIC_ASF

*Status

Active

Exported

No

Enable SSL

☐

Support XML

☒

*Service Category

Provider

Service Group

Owner ID

*Description

This service will update music

Create Root Resource

Import Root Resource

No Root Resources Defined.

The developer can select whether to create a new root resource or import an existing root resource.

Field or Control	Description
Create Root Resource	Select this button to create a new root resource.
Import Root Resource	Select this button to import a root resource from another Application Service or the same Application Service.

Creating Root Resource

Use the Create Root Resource page to create a new root resource.

This example illustrates the fields and controls on the Create Root Resource for Provider Application Service page. You can find definitions for the fields and controls later on this page.

Cancel

Create Root Resource

Done

*Root Resource

band

*Description

Band information

*Root Package ID

SL_DEMO

*App Package Path

:

*Application Class ID

band

*Status

Active

Not for Export

Field or Control	Description
Root Package ID	Select the application package that contains the application logic to execute. The drop-down list displays all the application packages that extend the PTCBAPPLSVCDEFN:ApplicationServiceBase application class.
App Package Path	The qualified sub package or class path.
Application Class ID	The corresponding Application Class ID.
Status	The status for the Root Resource. When you create a new Root Resource, the default status is Active.
Not for Export	Select this check box if the root resource should not be exported as a part of an Open API generation for an Application Service.

Once the root resources are created, they will be available from the Application Service page.

This example illustrates the fields and controls on the Application Service page with Root Resource defined.

Application Service - MUSIC Save

General Information

Service Type: Primary
 Service URL ID: music
 IB Service Name: MUSIC_ASF
 *Status: Active
 Exported: No
 Enable SSL: ☐
 Support XML: ☒
 *Service Category: Provider
 Service Group:
 Owner ID:
 *Description: This service will update/ get music information.

Create Root Resource Import Root Resource

Root Resources 2 rows

Name	Status	Description	Not for Export
band	Active	Band information	☐

Select the Root Resource name to define the URI Template.

This example illustrates the fields and controls on the Root Resource page.

Root Resource Cancel Done

band

*Root Package ID: SL_DEMO
 *Qualified Package/Class Path: :
 *Application Class ID: band
 *Status: Active
 *Description: Band information
 Not for Export: ☐

Add URI Template

See [Adding URI Templates](#)

Importing Root Resource

Use the Import Root Resource button to import a root resource from another Application Service or the same Application Service.

This example illustrates the fields and controls on the Select Root Resource(s) to copy page. You can find definitions for the fields and controls later on this page.

Cancel

Select Root Resource(s) to copy

Import

App Service ID

MUSIC

Q

Search

Root Resources

1 row

Select	Root Resource	To Root Resource Name	Status	Description
☒	band	band	Active	Band information

Field or Control	Description
App Service ID	Select the Application Service by either entering the Application Service ID directly or using the Search Button.
Search	Selection of the desired App Service ID will display all the Root Resources for that Application Service.
Select	Select for the root resource you want to import.
Root Resource	Root resource.
To Root Resource Name	Optionally, you can change the name for the root resource.
Status	Root resource status.
Description	Description.
Import Button	Select the import button to copy all the metadata except for the Application Class information from the Root Resource over to the Application Service. All template parameters defined for the root resource are copied to the Base Template page. The root resource is displayed in the Root Resources section of the Application Service. The Application Class information for the imported root resource will be blank.

Creating a New Consumer Application Service

Starting with PeopleTools 8.60 the Application Service Framework supports generating Consumer Application Services to call 3rd party provider integrations.

Creating the Consumer Application Service

To create a new Consumer Application Service:

1. Select **PeopleTools > Integration Broker > Application Services > Manage Application Services**.
2. Select Create Application Service.


This example illustrates the fields and controls on the Application Services – General Information page to create a new Consumer Application Service. You can find definitions for the fields and controls later on this page.

Field or Control	Description
App Service ID	Service ID for the Application Service.
Service Type	When you create a new Consume Application Service, the Service Type is Primary only.
Service URL ID	Service URL ID forms a part of the endpoint URL. It identifies the service to be executed.
Status	Status for the Application Service. When you create a new Application Service, the default Status is Active.
Enable SSL	Requires SSL for the Service to be invoked.
Service Category	Select Consumer.
Service Group	Used to group services together for search.
Owner ID	Owner of the Application Service.
Description	A description for the Application Service.

The Save action will perform the following:

- Verify that the *Service URL ID* value meets the Oracle standard for an URL value. If valid, the value will then be checked against Integration Broker Service Alias's to insure it is unique. If the value does not meet this criteria, a pop up message will be displayed.

This example illustrates the Service URL ID validation message.

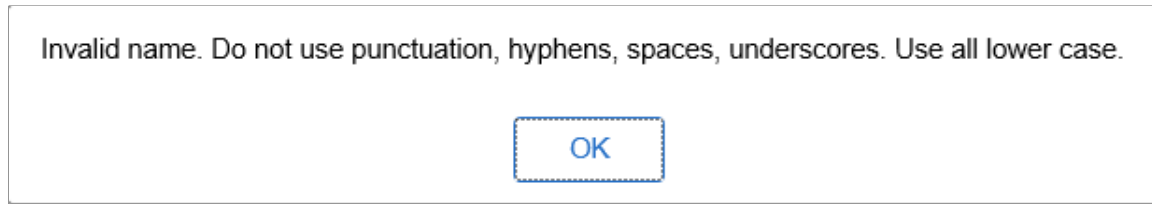

Correct the Service URL ID and save the application service.

- When the *Service URL ID* is valid, save processing will generate the necessary IB metadata, update the Service Name and enable the Create Root Resource button.

This example illustrates the fields and controls on the Application Service page for Consumer Application Service after Save. You can find definitions for the fields and controls later on this page.

Field or Control	Description
Security	Select this link to set the Security details.
Create Root Resource	Select this button to create a new root resource.

Setting Security Details

The Security link at the Service level can be used to update the security for all defined methods of the Service.

The provider of the integration will define what security will be required to invoke their integration(s). This can be Basic Authentication, oAuth2 or no security at all. For each method (integration) the appropriate security can be set by selecting the Security link. The developer can then select the Authentication Option.

This example illustrates the fields and controls on the Security Details page. You can find definitions for the fields and controls later on this page.

Cancel

Security Details

Done

Authentication Option

Update all current methods ☐

Field or Control	Description
Authentication Option	Authentication Option are Basic Auth or oAuth2
Update all current methods	Select this check box to propagate the security information to all the methods.

Basic Authentication

This example illustrates the fields and controls on the Security Details page when Basic Auth is selected. You can find definitions for the fields and controls later on this page

Cancel

Security Details

Done

Authentication Option

*External User ID

*External Password

Update all current methods ☐

Field or Control	Description
Authentication Option	Basic Authentication
External User ID	User ID
External Password	User ID password

oAuth2

3rd party Authorization Service information should first be registered on the oAuth2 security pages see “Creating a Service Application” (Security Administration).

This example illustrates the fields and controls on the Security Details page when oAuth2 is selected. You can find definitions for the fields and controls later on this page.

Cancel

Security Details

Done

Authentication Option

oAuth2

*OAuth Name

Update all current methods

☐

Field or Control	Description
Authorization Option	oAuth2
OAuth Name	Select the OAuth name from the drop down list. All registered Service Applications are available from the drop down list.
Update all current methods	Select this check box to propagate the security information to all the methods.

Creating Root Resource

Use the Create Root Resource page to create a new root resource.

Select the Create Root Resource button from the Application Service page.

This example illustrates the fields and controls on the Create Root Resource page for a Consumer Application Service. You can find definitions for the fields and controls later on this page.

Cancel

Create Root Resource

Done

*Root Resource

band

*Description

Band information

*Status

Active

URL Identifier

*REST Base URL

https://[redacted].peoplesoft.com/7002/services/identifiers

Field or Control	Description
Root Resource	The name of the Root Resource defined by the Provider.
Description	A description of the root resource.
Status	Status for the root resource. When a root resource is created, the default status is Active.
URL Identifier	The URL Identifier defined for the REST base URL. If you select a URL Identifier for the Application Service, the REST Base URL field gets automatically populated and becomes read-only. To define the REST Base URL, remove the URL Identifier entry and tab out. Note: You must define either a REST Base URL or URL Identifier to save the Application Service.

Field or Control	Description
REST Base URL	The base URL as defined by the Provider Integration to be called. If you select a URL Identifier for the Application Service, the REST Base URL field gets automatically populated and becomes read-only. To define the REST Base URL, remove the URL Identifier entry and tab out. Note: You must define either a REST Base URL or URL Identifier to save the Application Service.

Note: For the cases where a root resource cannot be established then any root resource name will do as long as it complies with the Oracle naming standards.

Once the root resource is created for the Application Service it is displayed on the page.

This example illustrates the fields and controls on the Application Service page after root resource is created.

Application Service

Search

Application Service

Base Parameters

Base Template Parameters

Summary

Application Service - MUSIC_CONSUMER Save

General Information

Service Type Primary

Service URL ID musiccon

IB Service Name MUSIC_CONSUMER_ASF

*Status Active

*Service Category Consumer Security

Service Group

Owner ID

*Description Consumer Service that calls the MUSIC Provider service

Create Root Resource

Root Resources 1 row

Name	Status	Description
band	Active	Band information

Select the Root Resource name to open the Root Resource page.

This example illustrates the fields and controls on the Consumer Root Resource page.

Cancel **Root Resource** Done

band

*Status Active

*Description Band Information

URL Identifier

*REST Base URL https://glass01.peoplesoft.com:7002/services/clientservlet/gnDEC/?cmd=stan&

Add URI Template

Select the Add URI Template button to define the URI templates for this resource. See [Adding URI Templates](#).

Example: Invoking a Consumer Application Service

The following example demonstrates how the consumer application service with IB Service Name CONSUME_EXAMPLE is invoked:

```
import PTCBAPPLSVCDEFN:ApplicationServiceBase; /* Import the Application Service Ba⇒
se class */
import PTCBAPPLSVCDEFN:MessageAPI; /* used to get the ServiceAPI object */

Local PTCBAPPLSVCDEFN:ApplicationServiceBase &base;
Local PTCBAPPLSVCDEFN:MessageAPI &ServiceAPI;

&base = create PTCBAPPLSVCDEFN:ApplicationServiceBase(); /* instantiate and return ⇒
the base object */
/* Returns the ServiceAPI based on the Application Service keys (Application Servic⇒
e name,
Root Resource, URI Index, and REST Method) */
&ServiceAPI = &base.createService("CONSUME_EXAMPLE", "conroot", 1, %AppService_HTTP⇒
GET);
/* Populate any Template Parameters based on the URI Index */
&ServiceAPI.setTemplateParameter("flightNumber", "12X20", False);
&ServiceAPI.setTemplateParameter("pilots", "DogDish", True);
&ServiceAPI.setTemplateParameter("pilots", "Hammer", True);
/* use the &ServiceAPI to populate any Input Parameters */
/* User Exception Option which when set if an error occurred will not terminate
the actual Synchronous Transaction but will allow the developer to read the error a⇒
nd continue processing. */
&ServiceAPI.UserException = True;
/* allows the developer to override the entire URL used to invoke the Application S⇒
ervice */
rem &ServiceAPI.SetOverrideURL(http://xxxxxxx:5000/PSIGW/RESTListeningConnector/T60⇒
KAC11/flightdata.v1/flight);
/* Invokes the Application Service via an Integration Broker SyncRequest */
&base.invokeService();
Local integer &RespCode;
Local string &RawData;
/* check for exception if User Exception set */
If &ServiceAPI.ResponseFailed Then
    &RespCode = &ServiceAPI.HttpResponseCode; /* read the HTTP Response Code return⇒
d by the Provider */
    Local string &RespException = &ServiceAPI.ResponseException; /* Read the Respons⇒
e Exception returned as a result of the invocation */
    &RawData = &ServiceAPI.getOutputContentData(); /* read any actual data returned ⇒
by the Provider */
Else
    /* use the &ServiceAPI to read the data returned by the Provider (Output Paramet⇒
ers) */
    Local string &Program = &ServiceAPI.getOutputParameter("flightProgram");
    Local string &ACType = &ServiceAPI.getOutputParameter("aircraftType");
    &RespCode = &ServiceAPI.HttpResponseCode; /* read the HTTP Response Code return⇒
```

```

d by the Provider */
    &RawData = &ServiceAPI.getOutputContentData(); /* optionally read actual raw data⇒
a returned by the Provider */
End-If;

```

Setting Data Compression for Consumer Application Service

REST consumer transactions are sent uncompressed by default. In order to send data compressed, the developer should set the following on the HTTP Header Page of the Application Service:

Header Type: *Request*

Property Name: *sendCompressed*

Value: *Y*

Alternatively, the developer can set this option via PeopleCode:

```
&ServiceAPI.setRequestHeader("sendUncompressed", N);
```

Adding URI Templates

URI templates are strings that can be transformed into URIs after embedded variables are substituted. URI templates use a simple syntax where braces denote variables to be replaced when the templates are converted to actual URLs. Application Services only supports direct variable substitution.

The denoted variables identified with the { } are replaced with the actual value as defined on the Base Template Parameters page. When the Base Template Parameters page is saved, a restricted document is created defining the primitives used for value replacement within the URI template. The Document will only contain primitives and collections of these primitives. The following naming convention is used:

```
Document Package: ASF_SERVICE Document: <App Service ID>_ASF Version: v1
```

The string entered for the template will be validated to insure that there is no equivalent or ambiguously defined template currently entered on the grid. Moreover the values used within the { } must be defined on the Base Template Parameters page.

For more information on REST resources, see [Understanding REST Resource Definition Concepts](#).

Note: The document created for the application service will be in restricted mode. For more information on the document created see “Using the Document Tree to View Document Information” (Documents Technology).

Use the Add URI Template button on the Root Resource page to access the URI Template Builder.

This example illustrates the fields and controls on the Add URI Template page. You can find definitions for the fields and controls later on this page.

Cancel

Add URI Template

Done

Expression Workspace

Expression Type

Simple String

Base Template Parameters

No Base Template Parameter Found

Add Base Template Parameter

URI Template

band/

Add Separator

URI Template Format Example: weather/{state}/{city}/{day}

The URI Template Builder is divided into 2 sections: Expression Workspace and URI Template.

Field or Control	Description
Expression Type	Simple String is the default. Simple String is used for Provider REST web services. Other styles are available from the drop down list. See Understanding URI Template Expressions and Expansions .
Add Base Template Parameters button	Select to add additional base parameters. See Adding Base Template Parameters . Parameters defined on the Base Template Parameters page can be selected to build out the URI.
URI Template	The Root Resource must always be the first string defined for the URI Template. See Building the URI Template

Building the URI Template

After creating the base template parameters, they are available to build the URI Template.

To build the URI template:

1. Select the Add To Workspace button for the parameter.

2. The parameter will be displayed in brackets in the Expression Workspace.
3. Click the Append to URI button to add the parameter to the URI template.
4. Use the Add Separator button to add a separator (/) to the URI template.
5. When the URI Template is complete, click Done.

This example illustrates the fields and controls on the Add URI Template page after building the URI template. You can find definitions for the fields and controls later on this page.

Cancel
Add URI Template
Done

Expression Workspace

Expression Type
Simple String

Base Template Parameters

Add Base Template Parameter

Name	Data Type	Collection	Explode Modifier	Add To Workspace
instrument	String	No		Add To Workspace
musicCode	Int	Yes		Add To Workspace

Expression Workspace
Append To URI

URI Template

band/{instrument}/{musicCode}

Add Separator

URI Template Format Example: weather/{state}/{city}/{day}

Field or Control	Description
Expression Type	Select the expression type from the drop-down list.
Add Base Template Parameter	Select to add a base template parameter.
Name	Name of available base template parameter.
Data Type	Data type for the parameter.
Collection	Yes indicates that this parameter is a collection.
Explode Modifier	For a parameter defined as a collection you can add the Explode Modifier by selecting * from the drop down list.

Field or Control	Description
Add To Workspace	Select to the add the parameter to the Expression workspace. Note: Only one parameter can be added at a time.
Expression Workspace	Displays the parameter add to the workspace in brackets.
Append to URL	When you select this button, the parameter will be added to the URI template.
URI Template	This section will display the formatted template. You can manually add separator (/) or select the Add Separator button to add separators as needed for the URI.

Validating URI Template

After you build the URI Template and save the Application Service, the Validate link is available. Use the Validate link on the URI Template page to verify the URL with base template parameters.

To validate the URI:

1. Click the Validate link on the URI Template page.

The URI Template Builder page is displayed.

2. Enter a value for each base template parameter.

See “Populating URI Template” (Integration Broker Testing Utilities and Tools).

3. Click Generate URL.

This example illustrates the fields and controls on the URI Template Builder page.

URI Template Builder

Package ASF_SERVICE

Document MUSIC

Version v1

URI Template band/{instrument}/{musicCode}

[Clear Data](#)

[Left | Right](#)

- MUSIC
 - instrument - oboe
 - musicCode
 - musicCode_value - 1
 - musicCode_value - 2

[Generate URL](#)

URL
http://...PSIGW/RESTListeningConnector/T60CDDMO/.v...

4. You can copy the generated URL to view the entire URL with the base template parameters.
.../music.v1/band/oboe/1,2
5. Close the URI Template Builder window.

Adding Method to the URI Template for Provider Application Services

Once the URI Template is defined, it is added to the Root Resource page. Select the root resource from the Application Service page.

This example illustrates the fields and controls on the Root Resource page with URI Template. You can find definitions for the fields and controls later on this page.

Cancel

Root Resource

Done

band

*Root Package ID

SL_DEMO

Q

*Qualified Package/Class Path

:

Q

*Application Class ID

band

Q

*Status

Active

▼

*Description

Band information

Not for Export

☐

▼ URI Template 1 - band/{instrument}/{musicCode}

Delete URI Template

Add Method

*URI Template

band/{instrument}/{musicCode}

URI Template Builder

Validate

> GET

Add URI Template

Field or Control	Description
Delete URI Template	Select to delete the URI template.
Add Method	Select to add the method.
URI Template Builder	Select to modify the existing URI template.
Add URI Template	Select to add another URI template.

Adding Method

Select the Add Method button.

This example illustrates the fields and controls on the Add Method page for Provider Application Service. You can find definitions for the fields and controls later on this page.

Cancel

Add Method

Done

*Method

GET

▼

Multi Row Input

☐

No

Multi Row Output

☒

Yes

Token Required

☐

No

*Description

Get list of students for an instrument and code

Field or Control	Description
REST Method	Select type of HTTP method.
Multi Row Input	If you have multiple rows of input, select Yes; otherwise select No.
Multi Row Output	If you have multiple rows of output, select Yes; otherwise select No.
Token Required	Indicates that a Token (oAuth2 or Basic Authentication) is required to invoke the service. oAuth2 is the default.
Description	Description of the method implementation.

REST Methods

REST methods determine the HTTP method for manipulating the resources defined in the Application Service.

HTTP Method	Description
GET	Use to retrieve a representation of a resource. GET is a safe and idempotent method. It must not be used to change a resource, create a resource or delete a resource.

HTTP Method	Description
POST	Use to create new resource to an existing URL.
PUT	Use to create a new resource to a new URL, or modify an existing resource to an existing URL. PUT requests are idempotent. That is, calling the same PUT request multiple times will always produce the same result.
PATCH	Use to update a portion of a document resource.
DELETE	Use against a singular resource to delete a document resource. DELETE doesn't need a request body (Input parameters are optional). DELETE is not safe, but it must be idempotent. Note: DELETE without a request body will be flagged in OpenAPI 3.0 as an error. The specification does not explicitly allow or disallow it.

OPTIONS Method

The HTTP OPTIONS method is used to request information about the communication options available for the target resource.

In order to enable accepting the HTTP Options method the parameter called `ig.OptionsEnabled` needs to be set to *True* in the `IntegrationGateway.Properties` file on the web server. Note that HTTP OPTIONS is only applicable for the REST Listening Connector.

Options method is only applicable for Provider REST Services.

HEAD Method

The HTTP HEAD method is used to ask only for information about a document, not for the document itself. The HEAD method asks for a response identical to a GET request, but without the response body. Note that HTTP HEAD is only applicable for the REST Listening Connector.

Root Resource with URI Template Defined

After you add a method to the URI template, you can expand the URI Template and method.

This example illustrates the fields and controls on the Root Resource with URI Template Method. You can find definitions for the fields and controls later on this page.

Cancel

Root Resource

Done

band

*Root Package ID

SL_DEMO

Q

*Qualified Package/Class Path

:

Q

*Application Class ID

band

Q

*Status

Active

▼

*Description

Band information

Not for Export

☐

▼ URI Template 1 - band/{instrument}/{musicCode}

Delete URI Template

Add Method

*URI Template

band/{instrument}/{musicCode}

URI Template Builder

Validate

▼ GET

Method

GET

Multi Row Input

☐ No

Multi Row Output

☒ Yes

Token Required

☐ No

Description

Get list of students for an instrument and code

Parameters

Header

Result States

Add URI Template

For the expanded method the following links are available.

Field or Control	Description
Parameters	Select this link to maintain the available input and output parameters. See Adding Input and Output Parameters.
Header	Optionally headers can be assigned for the Request or Response. Selection of the Headers link will bring up the Headers page. These headers will be part of the Open API documentation for the 3rd party to set (Request) or read (Response). See Defining Headers.

Field or Control	Description
Result States	Selection of this link will bring up the Results State page. By default a single Result State will be created indicating a success (with a Status Code of 200). See Defining Result States For Provider Application Service .

Adding Method to the URI Template for Consumer Application Service

Once the URI Template is defined, it is added to the Root Resource page. Select the root resource from the Application Service page.

This example illustrates the fields and controls on the Root Resource page with URI Template. You can find definitions for the fields and controls later on this page.

Cancel

Root Resource

Done

band

*StatusActive

*DescriptionBand Information

URL IdentifierBAND_ENDPOINT

*REST Base URLhttp://[hostname]:[port]/[path]/[resourceName]/[method]

URI Template 1 - band/{instrument}/{timein}/{datein}/{musicCode}

Delete URI Template

Add Method

*URI Templateband/{instrument}/{timein}/{datein}/{musicCode}

URI Template Builder

Validate

> Group box

Add URI Template

Field or Control	Description
Delete URI Template	Select to delete the URI template.
Add Method	Select to add the method.
URI Template Builder	Select to modify the existing URI template.
Add URI Template	Select to add another URI template.

656

Copyright © 1988, 2025, Oracle and/or its affiliates.

Adding Method

Select the Add Method button.

This example illustrates the fields and controls on the Add Method page for Consumer Application Service. You can find definitions for the fields and controls later on this page.

Cancel

Add Method

Done

*Method

GET

Multi Row Input

Multi Row Output

*Description

Get instrument assigned for each student

Field or Control	Description
REST Method	Select type of HTTP method.
Multi Row Input	If you have multiple rows of input, select Yes, otherwise select No.
Multi Row Output	If you have multiple rows of output, select Yes, otherwise select No.
Description	Description of the method implementation.

REST Methods

REST methods determine the HTTP method for manipulating the resources defined in the Application Service.

<i>HTTP Method</i>	<i>Description</i>
GET	Use to retrieve a representation of a resource. GET is a safe and idempotent method. It must not be used to change a resource, create a resource or delete a resource. Note: If you want to invoke the HEAD method for a consumer Application Service, use the GET method. See Using the GET Method to Invoke HEAD.
POST	Use to create new resource to an existing URL.
PUT	Use to create a new resource to a new URL, or modify an existing resource to an existing URL. PUT requests are idempotent. That is, calling the same PUT request multiple times will always produce the same result.
PATCH	Use to update a portion of a document resource.
DELETE	Use against a singular resource to delete a document resource. DELETE doesn't need a request body (Input parameters are optional). DELETE is not safe, but it must be idempotent. Note: DELETE without a request body will be flagged in OpenAPI 3.0 as an error. The specification does not explicitly allow or disallow it.

Root Resource with URI Template Defined

After you add a method to the URI template, you can expand the URI Template.

This example illustrates the fields and controls on the Root Resource with URI Template Method for Consumer Application Service. You can find definitions for the fields and controls later on this page.

Cancel

Root Resource

Done

band

*StatusActive

*DescriptionBand Information

URL IdentifierBAND_ENDPOINT

*REST Base URLhttp://hostname:147402/api/1/submitappreq/for1_oracledev.com/2020P101204REST/submitappreq/

URI Template 1 - band/{instrument}/{timein}/{datein}/{musicCode}

Delete URI Template

Add Method

*URI Templateband/{instrument}/{timein}/{datein}/{musicCode}

URI Template Builder

Validate

GET

MethodGET

Multi Row Input

Multi Row Output

DescriptionGet instrument assigned for each student

Parameters

Header

Security

Add URI Template

For the expanded method the following links are available.

Field or Control	Description
Parameters	Select this link to maintain the available input and output parameters. See Adding Input and Output Parameters .
Header	Optionally headers can be assigned for the Request or Response. Selection of the Headers link will bring up the Headers page. These headers will be part of the Open API documentation for the 3rd party to set (Request) or read (Response). See Defining Headers .
Security	Select this link to set the security for this method. See Setting Security Details

Using the GET Method to Invoke HEAD

To invoke the HEAD method for a REST consumer Application Service, use the GET method. A new property will be created on the ApplicationServiceBase class called HeadRequest. This is both a SET and a GET property taking a boolean value. When set, the HTTP method for GET will change internally to HEAD.

The following example illustrates the use of the GET method to invoke a HEAD for the FLIGHTDATA_CON consumer Application Service:

```
import PTCBAPPLSVCDEFN:ApplicationServiceBase;
import PTCBAPPLSVCDEFN:MessageAPI;

Local string &AppSrv = "FLIGHTDATA_CON";
Local string &AppSrvRoot = "flight";
Local string &AppSrvMethod = %AppService_HTTP_GET;
Local integer &AppSrvIndex = 1;

&base = create PTCBAPPLSVCDEFN:ApplicationServiceBase();
&base.HeadRequest = True;
&ServiceAPI = &base.createService(&AppSrv, &AppSrvRoot, &AppSrvIndex, &AppSrvMethod⇒
);
```

Adding Input and Output Parameters

Select the Parameters link for the URI method on the Root Resources page.

Note: Methods except GET and possibly DELETE, potentially require input and output parameters.

Warning! For output parameter data types Compound, Compound Array, Custom, String List, the values entered to populate the object or list in PeopleCode should be properly escaped. Use this PeopleCode method to perform the escaping of the values:

```
&EscapedValue = %IntBroker.JSONEscapeCharacters(<string value>);
```

Use the Create Input Parameter and Create Output Parameter buttons to add additional parameters.

The screenshot shows a 'Parameters' dialog box. At the top left is a 'Cancel' button and at the top right is a 'Done' button. The main area displays 'Application Service : MUSIC [band / URI Index:2 / POST]' and 'URI Template band/{instrument}'. Below this is a section titled '> Base Parameters' with a scrollable list. At the bottom are two buttons: 'Create Input Parameter' and 'Create Output Parameter'.

<i>Field or Control</i>	<i>Description</i>
Base Parameters	Expand the Base Parameters section to use any existing base parameters. See Adding Base Template Parameters .
Create Output Parameter	Select to create a new input parameter.
Create Input Parameter	Select to create a new out parameter.

Selecting Base Parameters

Base parameters can be defined once and used as inputs or outputs in multiple URIs. Expand the Base Parameters section to select an existing base parameter.

This example illustrates the fields and controls on the Parameters page. You can select to use the existing parameters as input or output.

Cancel

Parameters

Done

Application Service : MUSIC [band / URI Index:2 / POST]

URI Template band/{instrument}

✓ **Base Parameters**

4 rows

Name	Description	Data Type	Length	Value Type	Use as Input	Use as Output	
instrument	instrument	String	30	Runtime	Use as Input	Use as Output	>
numPlayers	number of players	Number		Runtime	Use as Input	Use as Output	>
player	player	String	30	Runtime	Use as Input	Use as Output	>
results	results	String	30	Runtime	Use as Input	Use as Output	>

Create Input Parameter

Input Parameters

2 rows

	Name	Data Type	Description	Length	IB Required	Value Type	Copy	
1	musicCode	Integer	music code		No	Runtime Value		>
2	player	String	player	30	No	Runtime Value		>

Create Output Parameter

Output Parameters

2 rows

	Name	Data Type	Description	Length	IB Required	Value Type	Copy	
1	results	String	results	30	No	Runtime Value		>
2	updated	Boolean	updated		No	Runtime Value		>

When you select Use as Input or Use as Output, the parameter is added in the appropriate section.

The parameter is added as input or output depending on the option selected. To view or modify the parameter details for this URI select the > icon.

This example illustrates the fields and controls on the Parameter Details. You can find definitions for the fields and controls later on this page.

Depending on the Data Type selected, the fields appropriate fields for the data type are displayed, however the following fields will always appear.

Field or Control	Description
Parameter Data Type	Displays the parameter data type of the base parameter. The data type can be changed for this URI, however if you try to update the base parameter with that change a warning message will be displayed.
IB Required	Select Yes to indicate this is a mandatory parameter.
Value Type	For output parameter, the value is read only and will always be Runtime. For input parameter, select Runtime or Fixed. If Fixed is select, a field to enter the Parameter Value is displayed.

Adding New Input or Output Parameters

When you select to add a new input or output parameter page, the Parameter Details page is displayed.

This is an example of the parameters page for a new output parameter.

Cancel

Parameters

Done

*Name

*Parameter Data Type

Parameter Length

IB Required

No

Value Type

Runtime

Description

Field or Control	Description
Parameter Data Type	Displays the parameter data type of the base parameter. The data type can be changed for this URI, however if you try to update the base parameter with that change a warning message will be displayed.
IB Required	Select Yes to indicate this is a mandatory parameter.
Value Type	For output parameter, the value is read only and will always be Runtime.

This example illustrates the fields and controls on the Parameter page that includes input and output parameters. You can find definitions for the fields and controls later on this page.

Cancel

Parameters

Done

Application Service : MUSIC [band / URI Index:2 / POST]

URI Template band/{instrument}

> Base Parameters

Create Input Parameter

Input Parameters

2 rows

Name	Data Type	Description	Length	IB Required	Value Type	Copy
1 musicCode	Integer	music code		No	Runtime Value	 > 
2 player	String	player	30	No	Runtime Value	> 

Create Output Parameter

Output Parameters

2 rows

Name	Data Type	Description	Length	IB Required	Value Type	Copy
1 results	String	results	30	No	Runtime Value	> 
2 updated	Boolean	updated		No	Runtime Value	 > 

Use the Copy icon to add the new parameter to the Base Parameters. If the parameter already exists in base parameters, the copy icon is not available.

Defining Headers

Optionally headers can be assigned for the Request or Response. These headers will be part of the Open API documentation for the 3rd party to set (Request) or read (Response).

Select the Headers link for the URI method on the Root Resources page.

This example illustrates the fields and controls on the HTTP Headers page. You can find definitions for the fields and controls later on this page.

Cancel

HTTP Headers

Done

Application Service : MUSIC [band / URI Index:1 / GET]

Header Properties

Header Type	Property Name	Value	Description	Edit
Request	Content-Type	text/xml,application/json	content type	Edit + 
Response	language	ENG	language	Edit + 

<i>Field or Control</i>	<i>Description</i>
Header Type	Indicate if this is a Request or Response header.
Property Name	Name of the header.
Value	Optional value for the header.
Description	Description of the header.
Edit button	Select to edit the header.
Add icon	Select to add a new header.
Delete icon	Select to delete a row.

See [Defining Routing Header Properties for Provider REST Service Operations](#)

Defining Result States For Provider Application Service

Select the Results States link for the URI method on the Root Resources page.

By default a single Result State will be created indicating a success (with a Status Code of 200).

This example illustrates the fields and controls on the Result States page. You can find definitions for the fields and controls later on this page.

Cancel

Result States

Done

Application Service : MUSIC [band / URI Index:1 / GET]

Result State

4 rows

Category	Application States	Status Code	Description		
Success	Success - Task Complete	200	Success	+	
Success	Success - PLAY MUSIC	200	Success	+	
Failure	Failure	404	General failure	+	
Failure	Invalid Instrument	404	The instrument passed does not exist	+	

HTTP Response Code

2 rows

Status Code	Description
200	Success
404	General Failure

Result State Section

Field or Control	Description
Category	Result category for the Application Service state. Default values are: Success and Failure.
Application States	Application Server State. Used to set the desired state in developers implementation application class. For example: %This.ServiceAPI.ResultState = "Success⇒ - Task Complete";
Status	HTTP response code defined for the result state.
Description	Description for the Application Service state.

The HTTP Response Code grid is used to generate the Open API document for a 3rd party. Each unique HTTP Status Code that was defined on the Result State grid will be shown on the HTTP Response Code Grid. The developer should add a description which will be part of the Open API definition to provide additional information to the 3rd party.

HTTP Response Codes

An HTTP response code must be used to indicate the result of the HTTP request. The usage of these codes must follow the HTTP specification. Specifically, when there is a validation error in the request, such as mandatory field is not provided, or a field has invalid value, then the error code in 4xx range must be returned.

Selectable Response Codes include:

- 200 OK: Request successfully executed and the response has content.
- 201 Created: Resource successfully created. The response contains the created resource and possibly a location header that points to the new resource.
- 202 Accepted: Request has been accepted for processing but processing has not been completed. This is required for resource that supports asynchronous process.
- 204 No Content: Request successfully executed and the response doesn't have content.
- 400 Bad Request: The request could not be understood by the server due to malformed syntax.
- 401 Unauthorized: request has not been applied because it lacks valid authentication credentials for the target resource.
- 403 Forbidden: server understood the request but refuses to authorize it. If authentication credentials were provided in the request, the server considers them insufficient to grant access.
- 404 Not Found: The requested resource was not found.

Creating Service Alias

The ability to create a Service Alias provides customers with the flexibility to change the application logic in a registered Application Service, thereby avoiding customization. The Service URL ID remains the same for the Alias and the Primary Application Service from which it was created. The application logic is executed based on the Application Service that is active.

A new application class must be created for the alias which contains the application logic for the Application Service. If the primary Application Service is modified in an delivered update, it will not affect the alias application service.

To create a service alias for a registered Application Service:

1. Select **PeopleTools > Integration Broker > Application Services > Manage Application Service**.
2. Select Search.
3. Click the Create Service Alias button, corresponding to the Application Service.
4. Enter all the required fields.
5. Click Create Alias button.

This example illustrates the fields and controls on the Create Application Service Alias page. You can find definitions for the fields and controls later on this page.

Cancel
Create Application Service Alias
Create Alias

Primary Application Service PETSTORE

Alias Application Service

Service URL ID pets

IB Service Name PETSTORE_ASF

*Status Active ▾

Enable SSL ☐ No

Service Group Q

*Description

Root Resources 2 rows

Select	Root Resource	Status	Description
☒	pet	Active	all about pets
☐	store	Active	pet store orders

Field or Control	Description
Alias Application Service	Service ID for the Alias Application Service.
Service URL ID	Copied from Primary (read only).
IB Service Name	Copied from Primary (read only).
Status	Status for the Application Service.
Enable SSL	Requires SSL for the Service to be invoked (Used only if Primary Application Service is inactive).
Service Group	Used to group services together for search.
Description	A description for the Application Service.
Root Resources	Select the root resources to be copied from the primary Application Service.

This example illustrates the fields and controls on the Application Service Alias page. You can find definitions for the fields and controls later on this page.

Search

Application Service - PET_ALIAS Save

▼ General Information

Service Type Alias

Service URL ID pets

IB Service Name PETSTORE_ASF

*Status Active

Exported No

Enable SSL ☐ No

*Service Category Provider

Service Group

Owner ID

*Description pet services

Create Root Resource Import Root Resource

Root Resources 1 row

Name	Primary has same Root	Status	Description	Not for Export
pet	★	Active	all about pets	☐

Similar to the primary Application Service, the Create Root Resource and Import Root Resource buttons are available. See [Creating Root Resource](#) and [Importing Root Resource](#)

Any root resource copied from the primary Application Service is indicated with a star in the Primary has same Root column.

All metadata for each selected root resource will be copied over except for the Application Class information which will be blank. All template parameters used for the copied root resources will also be copied over to the base template parameters page. The application package, path and application path for the alias must be entered for the copied root resource.

To update the copied root resource, select the root resource.

This example illustrates the fields and controls on the Root Resource page.

Cancel **Root Resource** Done

pet

*Root Package ID

*Qualified Package/Class Path

*Application Class ID

*Status Active

*Description all about pets

Not for Export ☐

> URI Template 1 - pet

> URI Template 2 - pet/{petid}

Add URI Template


Adding Reusable Base Parameters

An Application Service can contain several root resources, each with its own set of input and output parameters. Use the Base Parameters page to define a set of parameters that can be reused for any root resource input or output parameters.

Base parameters can also be added directly from the Parameters page when the Application Service method is defined. See [Adding Input and Output Parameters](#).


Select **PeopleTools > Integration Broker > Application Services > Manage Application Service > Base Parameters**

This example illustrates the fields and controls on the Base Parameters page. You can find definitions for the fields and controls later on this page.

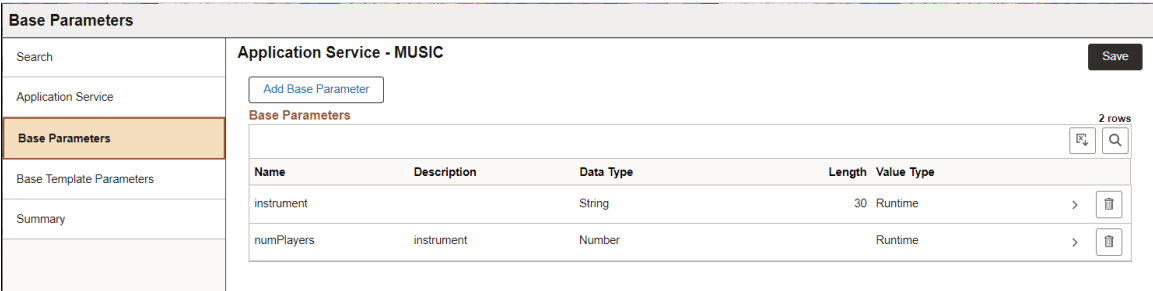

When you select Base Parameters, the existing base parameters are listed. Click Add Base Parameter to add new base parameters.

This example illustrates the fields and controls on the Base Parameters Details page. You can find definitions for the fields and controls later on this page.

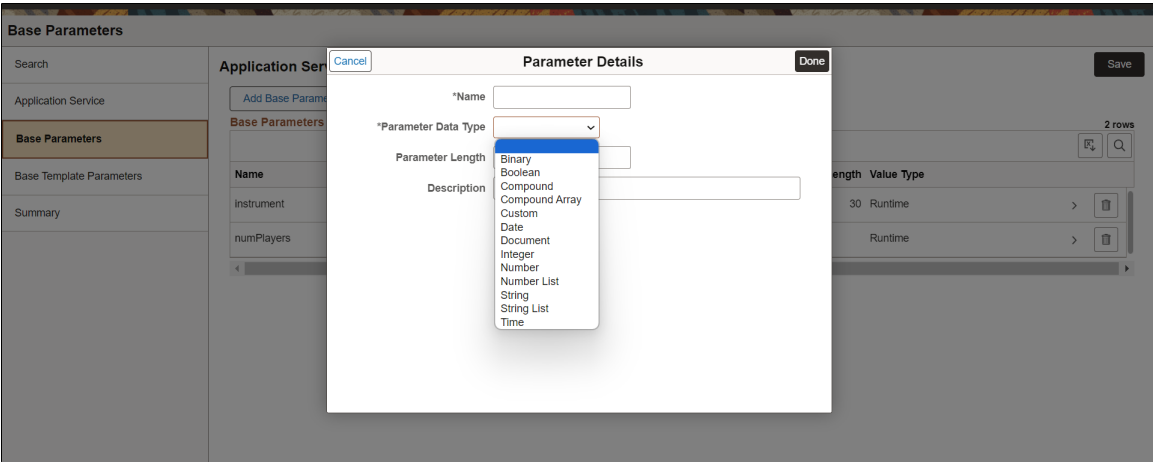

Field or Control	Description
Name	Enter a name for the parameter. The name entered must adhere to Oracle's naming standard.

Field or Control	Description
Parameter Data Type	Data type for the parameter: Binary, Boolean, Compound, Compound Array, Custom, Date, Document, Integer, Number, Number List, String, String List, or Time. Note: Boolean and Document parameter types are not supported for Chatbot specific integrations.
Parameter Length	Optional length used for String and String List.
Value Type	The default value is run time. The other option is Fixed which indicates a constant. Fixed is only valid for data type String or Number.
Package	For the Parameter Data Type of Document, enter the Document Package name.
Document	For the Parameter Data Type of Document, enter the Document.
Version	For the Parameter Data Type of Document, enter the Version.
Description	Description of the parameter.
JSON Metadata	For the Parameter Data Types of Compound, Compound Array or Custom the developer must supply a JSON schema to indicate the complex shape of the object. See Supplying JSON Schema

When you select Parameters for the Application Service, the base parameters will be available to use as input or output.

This example illustrates the fields and controls on the Parameters page. You can find definitions for the fields and controls later on this page.

Cancel

Parameters

Done

Application Service : MUSIC [band / URI Index:1 / POST]

URI Template band/{instrument}/{timein}/{datein}/{musicCode}

Base Parameters

2 rows

Name	Description	Data Type	Length	Value Type	Use as Input	Use as Output
instrument		String	30	Runtime	Use as Input	Use as Output >
numPlayers	instrument	Number		Runtime	Use as Input	Use as Output >

Create Input Parameter

Input Parameters

2 rows

	Name	Data Type	Description	Length	IB Required	Value Type	JSON	Copy
1	instrument	String	instrument	30	Yes	Runtime Value		>
2	notebook	Compound	this is my input student		No	Runtime Value	JSON	>

Create Output Parameter

Output Parameters

Selecting Document Parameter

Documents created using Document Builder can be used as a base parameter.

Note: The Document selected to use for a Document Parameter Data Type must be unique within the Service. If the Document selected is to be reused for another parameter then the Document Parameter should be saved as a Base Parameter so that it can be re-accessed. If the Same Document keys are defined on a different Document Parameter name, a message box will be displayed to inform the developer.

Enter the keys of the document on the parameters details page.

This example illustrates the fields and controls on the Parameters Details page for Document. You can find definitions for the fields and controls later on this page.

The screenshot shows a 'Parameter Details' dialog box with the following fields and values:

- *Name:** documentin
- *Parameter Data Type:** Document (dropdown menu)
- *Package:** Demo (with a search icon) and a blue 'Document' link to its right.
- *Document:** FLIGHTINFO (with a search icon)
- *Version:** V1 (with a search icon)
- Description:** Input document

When the keys to the Document are populated a Document link will appear. When selected a new browser tab will be generated which will bring up the actual Document in the Document Builder.

Note: When the keys of the Document are populated a check is performed to confirm if the *Hide Parent Object Label* is checked on the JSON details page of the selected Document. If the checkbox is disabled a message will be displayed indicating that the JSON parent object label of the Document will be included as part of the JSON schema generation and runtime generation. To remove the JSON parent object label, the Document needs to be saved with the *Hide Parent Object Label* checkbox selected. See “Managing JSON-Formatted Documents” (Documents Technology).

Supplying JSON Schema

For the Parameter Data Types of Compound, Compound Array or Custom the developer must supply a JSON schema to indicate the complex shape of the object.

Note: The schema when defined on the OpenAPI is not a complete schema as the schema is part of other schemas declared to construct the Open API. Therefore when the schema is pulled out to generate the OpenAPI it looks for the first "type" and takes everything from within there. So one could simply store a schema with the type but still must include the beginning brace { and ending brace } so that it still a valid schema. Note also that for Custom and Compound the first "type" must be defined as an "object". For a Compound Array the "type" must be "array".

Example Schemas for Compound or Custom

This example schema is part of the other schemas to define the overall shape as generated via Open API.

```
{
  "type": "object",
  "properties": {
    "Contact_name": {
      "type": "string",
      "maxLength": 60
    },
    "Contact_Title": {
      "type": "string",

```

```
    "maxLength": 30
  },
  "Contact_Phone": {
    "type": "string",
    "maxLength": 30
  }
}
```

Here is another example.

```
{
  "$schema": "http://json-schema.org/draft-06/schema#",
  "title": "Contracts",
  "type": "object",
  "properties": {
    "Contact_name": {
      "type": "string", "maxLength": 60},
    "Contact_Title": {
      "type": "string", "maxLength": 30},
    "Contact_Phone": {
      "type": "string", "maxLength": 30}}
}
```

Example Schema for Compound Array

This example schema is part of the other schemas to define the overall shape as generated via Open API.

```
{
  "type": "array",
  "items": {
    "properties": {
      "Contact_name": {
        "type": "string"
      },
      "Contact_Title": {
        "type": "string"
      },
      "Contact_phone": {
        "type": "string"
      }
    }
  }
}
```

Schema's constructed from the JSON Specification Definition must also adhere to the OpenAPI definition for Schema's. Here is an excerpt from the OpenAPI definition with respect to JSON Schema's:

The following properties are taken from the JSON Schema definition but their definitions were adjusted to the OpenAPI Specification.

<i>Property</i>	<i>Definition for OpenAPI Specification</i>
type	Value MUST be a string. Multiple types via an array are not supported.
allOf	Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema.
oneOf	Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema.

Property	Definition for OpenAPI Specification
anyOf	Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema.
not	Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema.
items	Value MUST be an object and not an array. Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema. Items MUST be present if the type is array.
properties	Property definitions MUST be a Schema Object and not a standard JSON Schema (inline or referenced).
additionalProperties	Value can be boolean or object. Inline or referenced schema MUST be of a Schema Object and not a standard JSON Schema. Consistent with JSON Schema, additionalProperties defaults to true.
description	CommonMark syntax MAY be used for rich text representation.
format	See Data Type Formats for further details. While relying on JSON Schema's defined formats, the OAS offers a few additional predefined formats.
default	The default value represents what would be assumed by the consumer of the input as the value of the schema if one is not provided. Unlike JSON Schema, the value MUST conform to the defined type for the Schema Object defined at the same level. For example, if type is string, then default can be "foo" but cannot be 1.

Workaround for Chatbot Specific Integrations

Boolean and Document parameter types not supported for Chatbot specific integrations. To work around this limitation

- Boolean

Use the String parameter type and define the following enums (true, false).

- Documents

1. Use a Document to define the shape of the data and generate a JSON schema.

2. Create a Custom parameter type.
3. Export the JSON schema from the Document to add as the Custom JSON schema.

The following PeopleCode snippets shows how convert to/from a Document for a JSON Object that is defined as an Input/Output Parameter Type of Custom.

Example PeopleCode to convert Document to JSON Object:

```
&Doc = CreateDocument("Demo", "flightData", "v1");
&COM = &Doc.DocumentElement;
&COM.GetPropertyByName("RadarSelection").value = 2;
&COM.GetPropertyByName("RadarMode").value = "TWS";
&COM.GetPropertyByName("BarScan").value = "4B 40";
&COM.GetPropertyByName("PRF").value = "HIGHT";
&COM.GetPropertyByName("ChannelSet").value = "2A";
&COM.GetPropertyByName("RadarRange").value = "40";
&COM.GetPropertyByName("Azimuth").value = "75";

Local JsonParser &jsonParser = CreateJsonParser();
&parseStatus = &jsonParser.Parse(&Doc.GenJsonString());

Local JsonObject &jObj = &jsonParser.GetRootObject();
%This.ServiceAPI.OutputRows [1].setParameter("flightData", &jObj);
```

Example PeopleCode to convert JSON Object to Document:

```
&jObj = %This.ServiceAPI.InputRows [1].getParameter("base");

&Doc = CreateDocument("Demo", "base", "v1");
&ret = &Doc.ParseJsonString(&jObj.ToString());
```

Adding Enumerated Values

Enumerated Values can be added to parameter type String or String List. To add enumerated values:

1. Create the String or String List and select Done.
2. Open the parameter, it will contain a link to Add Enumerated Values.
3. Select the Add Enumerated Values link.

This example illustrates the fields and controls on the Set Enumerated Values page.

Set Enumerated Values

Cancel Done

Name truefalse

Parameter Data Type String

Parameter Length 5

2 rows

	*Enum Name ↑↓	Description ↑↓		
1	True	True	+	-
2	False	False	+	-

4. Enter the values and click Done.

Adding Base Template Parameters

Use the Base Template Parameters page to define the parameters that will be used to build the URI templates.

The parameters defined on the Base Template page will build a Document that will be used for URI Template construction and parsing of the URI at runtime. Selecting the Collection check box will indicate that more than one of that type of value can be passed on the URL. The collection is equivalent to an array of <type> in People Code when reading the Template parameters. Upon Save of the Application Service a Document will be built that is tightly coupled to the Application Service metadata. The Document created will only contain primitives and collections of these primitives. The naming convention used is the following: Document Package: ASF_SERVICE Document: <App ServiceID>_ASF Version: v1

Select **PeopleTools > Integration Broker > Application Services > Manage Application Service > Base Template Parameters**

This example illustrates the fields and controls on the Base Template Parameters page. You can find definitions for the fields and controls later on this page.

Name	Description	Data Type	Length	Collection	
1 datein	this is my student	Date		No	>
2 instrument	instrument	String	30	No	>
3 musicCode	collection of codes	Int	5	Yes	>
4 student	student	String	30	Yes	>
5 timein	this is my student	Time		No	>

Use the Add Base Template Parameter button to add parameters.

This example illustrates the fields and controls on the Add Base Template Parameter Details page. You can find definitions for the fields and controls later on this page.

Parameter Details

*Name

*Parameter Data Type

Parameter Length

Decimal Length

Collection ☐

Description

Field or Control	Description
Name	Enter a name for the parameter. The name entered must adhere to Oracle's naming standard.
Parameter Data Type	Data type for the parameter: Binary, Boolean, Date, Decimal, Integer, String, or Time.
Parameter Length	Enter length used for Integer, Decimal, or String.
Decimal Length	For a decimal, enter the length for the fractional part.
Collection	Indicates the value will be part of a collection of values.
Description	Description of the parameter.

See [Adding URI Templates](#).

Using Application Service Summary

Use the Summary page to display all the metadata for the Application Service, this metadata is necessary when coding the application class for Application Service. This page contains:

- Root Names
- Methods
- URI Sequence numbers along with the Parameters
- Inputs
- Outputs
- Parameters

This example illustrates the fields and controls on the Summary page for a Provider Application Service. You can find definitions for the fields and controls later on this page.

Summary						
Search	> General Information					
Application Service	Root Resources					
Base Parameters	Select	Root Resource	Root Package ID	App Package Path	Application Class ID	Status Description
Base Template Parameters		band	QE_FLIGHTPLAN_SYNC	:	MUSIC	Active Band information
		concert	QE_FLIGHTPLAN_SYNC	:	MUSIC_ALT	Active concert information.
Summary	> URI Template 1 - band/{instrument}/{timein}/{datein}/{musicCode}					
	> URI Template 2 - band/{instrument}/{student}					
	> URI Template 3 - band					

Field or Control	Description
Root Resources	This section lists the root resources. Select the root resource as indicated by the arrow and the associated URI Templates are listed.
URI Templates	Expand the URI Template to access to the Template Parameters used for the URI, Methods, Parameters (Input/Output) and Header information.

This is an example of the expanded URI.

This example illustrates the fields and controls on the URITemplate Summary for a Provider Application Service. page.

Summary

Search

Application Service

Base Parameters

Base Template Parameters

Summary

> General Information

Root Resources

Select	Root Resource	Root Package ID	App Package Path	Application Class ID	Status	Description
	band	QE_FLIGHTPLAN_SYNC	:	MUSIC	Active	Band information
	concert	QE_FLIGHTPLAN_SYNC	:	MUSIC_ALT	Active	concert information.

< URI Template 1 - band/{instrument}/{timein}/{datein}/{musicCode}

< Template Parameters

Name	Data Type	Length	Collection	Description
instrument	String	30	No	instrument
timein	Time		No	this is my student
datein	Date		No	this is my student
musicCode	Int	5	Yes	collection of codes

> GET

> POST

> URI Template 2 - band/{instrument}/{student}

> URI Template 3 - band

This example illustrates the fields and controls on the URITemplate Summary for a Consumer Application Service. page.

Summary

Search

Application Service

Base Parameters

Base Template Parameters

Summary

General Information

Service Type Primary Service

Service URL ID musiccon

IB Service Name MUSIC_CONSUMER_ASF

Status Active

Description Consumer Service that calls the MUSIC Provider service

Root Resources

Select	Root Resource	REST Base URL	Status	Description
	band	http://[instrument]([timein])([datein])([musicCode])music v1	Active	Band information

URI Template 1 - band([instrument])(timein)([datein])([musicCode])

Template Parameters

Name	Data Type	Length	Collection	Description
instrument	String	30	No	instrument
timein	Time		No	Time in
datein	Date		No	Date in
musicCode	Int	5	Yes	Music code

GET

Method GET

Multi Row Output Yes

Token Required Yes

Description Get instrument

Output Parameters

Name	Data Type	Description	Length	IB Required	Value Type
instrument	String	instrument	30	No	Runtime Value
musicCode	Number List	music code		No	Runtime Value

The template parameters as well as the methods are displayed.

Expand the method to all the parameters, result state and header information (if applicable).

This example illustrates the fields and controls on the Example of POST Method.

POST

REST Method POST

Multi Row Input Yes

Multi Row Output Yes

Token Required No

Description Update the instrument assigned for each student

Input Parameters

Name	Data Type	Description	Length	IB Required	Value Type	JSON
instrument	String	instrument	30	Yes	Runtime Value	
notebook	Compound	this is my input student		No	Runtime Value	JSON

Output Parameters

Name	Data Type	Description	Length	IB Required	Value Type	JSON
results	Compound	this is my input student		Yes	Runtime Value	JSON
tool	String	this is my input student	30	Yes	Runtime Value	

Result States

Category	Application States	Status Code	Description
Success	Success	200	success - 200

Administering Application Services

Setting Application Services Security

Use the Application Services Security page to set security for a single Application Service or in bulk (multiple Application Services).

Select **PeopleTools > Integration Broker > Application Services > Administration > Application Service Security**.

The Bulk permissions page is used to set security for Provider Application Services. To set security for Consumer Application Services use the Security link on the Application Service.

This example illustrates the fields and controls on the Bulk Permissions page. You can find definitions for the fields and controls later on this page.

Bulk Permissions

Bulk Permissions

Token Required

SSL

Search Criteria

App Service ID

MUSIC

Service Type

Service URL ID

Service Group

Search

Clear

Path Item

8 rows

Select	App Service ID	Service Type	Root Resource	Index	Method	Permissions Set	Set Security
Yes	MUSIC	Primary	band	1	GET	No	Set Security
No	MUSIC	Primary	band	1	POST	No	Set Security
Yes	MUSIC	Primary	band	2	GET	No	Set Security
Yes	MUSIC	Primary	band	3	GET	No	Set Security
Yes	MUSIC	Primary	concert	1	GET	No	Set Security
Yes	MUSIC	Primary	concert	2	GET	No	Set Security
Yes	MUSIC_ALIAS	Alias	band	1	GET	No	Set Security
Yes	MUSIC_ALIAS	Alias	interlude	1	GET	No	Set Security

Deselect All

Select All

Bulk Update

The Search section provides the ability to search by App service ID, Service Type, Service URL ID and Service Group.

The rows returned from the search are shown in the Path Item grid.

Field or Control	Description
Select	Select Yes for all rows you want to include in the Bulk update.
App Service ID	Displays the application service ID.
Service Type	Displays the service type, either Primary or Alias.
Root Resource	Displays the root resource.
Index	Displays the index number.
Method	Displays the REST method.
Permission Set	Displays whether or not permission has been set.
Set Security	Use this link to set the security for the row selected.
Bulk Update button	Select to set security for all rows selected.

Bulk Update

When you select the Bulk Update button, you can add or delete permission lists and access will apply to all the selected rows.

This example illustrates the fields and controls on the Bulk Update page.

Bulk Permissions

Save

REST Method

7 rows

App Service ID	Root Resource	Index	Method
MUSIC	band	1	GET
MUSIC	band	2	GET
MUSIC	band	3	GET
MUSIC	concert	1	GET
MUSIC	concert	2	GET
MUSIC_ALIAS	band	1	GET
MUSIC_ALIAS	interlude	1	GET

Bulk Permissions

2 rows

Permission List	Access		
PTPT1200	FullAccess	+	-
QADMIN	FullAccess	+	-

[Clear all items](#)
[Return to Bulk Permissions](#)

Set Security

Use the Set Security link to assign permissions to a specific REST method.

This example illustrates the fields and controls on the Set Security page. You can find definitions for the fields and controls later on this page.

Security - Permission Lists

×

Save

Root Resources

App Service ID MUSIC

Root Resource band

Index 1

Method POST

Permission

1 row

Permission List	Access
1	Full Access + -

Token Required Page

Use the Token Required page to set the required Token status for single or multiple Root Resources (URI Index, Method) of an Application Service. When the Token status is false this is considered the equivalent of an anonymous user. The user context in this case will be set to the UserID of the Anonymous node when the integration is invoked. If the Token status is enabled for the Root Resource (URI Index, Method) then the default selection is oAuth2. The administrator can optionally select Basic Authentication.

This example illustrates the fields and controls on the Token Required page. You can find definitions for the fields and controls later on this page.

Token Required

Bulk Permissions

Token Required

SSL

Save

Search Criteria

App Service ID

MUSIC

Q

Service Type

Service URL ID

Q

Service Group

Q

Service Category

Provider

Search

Clear

> Chat Bot Token Type

Path Item

Update?	App Service ID	Service Type	Category	Root Resource	Index	Method	Token Required	Authentication
☒ Yes	MUSIC	Primary	Provider	band	1	GET	☒ Yes	Basic Auth
☐ No	MUSIC	Primary	Provider	band	1	POST	☐ No	
☐ No	MUSIC	Primary	Provider	band	2	GET	☐ No	
☐ No	MUSIC	Primary	Provider	band	3	GET	☐ No	
☐ No	MUSIC	Primary	Provider	concert	1	GET	☐ No	
☐ No	MUSIC	Primary	Provider	concert	2	GET	☐ No	
☐ No	MUSIC_ALIAS	Alias	Provider	band	1	GET	☐ No	

By default the Service Category is Provider. To set Token for Consumer Application Services, select Service Category Consumer.

This example illustrates the fields and controls on the Token Required page with Service Category Consumer selected. You can find definitions for the fields and controls later on this page.

Token Required

Bulk Permissions

Token Required

SSL

Save

Search Criteria

App Service ID

Q

Service Type

Service URL ID

Q

Service Group

Q

Service Category

Consumer

Search

Clear

> Chat Bot Token Type

Path Item

Update?	App Service ID	Service Type	Category	Root Resource	Index	Method	Token Required	Authentication	Security
☐ No	MUSIC_CONSUMER	Primary	Consumer	band	1	GET	☒ Yes	Basic Auth	Security
☐ No	MUSIC_CONSUMER	Primary	Consumer	band	1	POST	☐ No		

Select All Deselect All

686

Copyright © 1988, 2025, Oracle and/or its affiliates.

Field or Control	Description
Search Section	Use the Search section to perform a search based on App Service ID, Service Type, Service URL ID, Service Group, or Service Category.
Chatbot Token Type	For Chatbot specific integrations where the mandatory token option is selected on the Root Resource (URI Index, Method), the customer has the option of implementing security via PeopleSoft Token or OAuth2 Token. Configuration for OAuth2 requires an Authorization Server such as IDCS, OKTA, PING or AZURE. Based on this selection, Chatbot integrations from ODA will store and pass the selected Token as part of each request.
Update?	To update in bulk, select multiple rows that will have the same token required. Optionally, you can use the Select All link at the bottom of the grid.
Token Required	Select Yes to set the authentication option.
Authentication Option	If Token Required is selected then an additional edit box will be displayed to select the Authentication Option of Basic Authentication or OAuth2.
Bulk Update	Select to set token for all selected rows. The token page is displayed where you can set Token Required and Authentication Option.

SSL Page

Use this page to require the consumer of the integration to make a HTTP SSL call to invoke the particular service. This value is set for the Application Service, thereby any Root Resource being invoked will require SSL if enabled. If the Alias Application Service is active then that SSL setting will be used regardless of the actual Root Resource being invoked. Therefore, the SSL determination at runtime is to check for Alias Active, if not Active or does not exist, use Primary SSL setting.

This example illustrates the fields and controls on the SSL page. You can find definitions for the fields and controls later on this page.

SSL

Bulk Permissions Token Required **SSL**

[Save](#)

Security Request Verification

▼ Search Criteria

App Service ID

Service Type

Service URL ID

Service Group

Application Services

1 row

SSL	App Service ID	Service Type	Service URL ID	Service Name	Description	Status
☐ No	MUSIC	Primary	music	MUSIC_ASF	This service will update/ get music information.	Active

[Select All](#) [Deselect All](#)

The rows returned from the search will be displayed. The administrator can change the SSL for the applicable rows. A Select All or Deselect All option is available on the bottom of the page to make a bulk selection.

Activating Application Services

Use the Activate Application Services page to activate or inactivate an Application Service.

Activating an Application Service activates all REST API calls associated root resource and Application Service.

Inactivating an Application Service inactivates all its associated root resources thereby making all REST API calls to the Service inoperative.

To activate or inactivate Application Services:

1. Select **PeopleTools > Integration Broker > Application Services > Administration > Activate Application Services**
2. Search for the Application Services if necessary.
3. Select the Activate Option.
4. Select Yes in the Select column for the Application Services to be activated or inactivated.
5. Click Save to perform the activate option on the selected rows.

This example illustrates the fields and controls on the Activate Services page. You can find definitions for the fields and controls later on this page.

Activate Services

Activate Services

Search Criteria

App Service ID

Q

Service Type

Service URL ID

Q

Service Group

Q

Service Category

Search

Clear

Application Services

9 rows

Activate Selected

In-Activate Selected

Select	App Service ID	Service Type	Category	Service URL ID	Description	Status	Root Resource
☐ No	CHATBOT_TEST	Primary	Provider	chatbot	This is to test Chatbot Integrations.	Active	Root Resource
☐ No	FLIGHTDATA	Primary	Provider	flightdata	Information about Flight Data	Active	Root Resource
☐ No	MCFOAUTHOUTBOUND	Primary	Provider	ptmcfoauth	Get OAuth2 token for MCFOutboundEmail	Active	Root Resource
☐ No	MUSIC	Primary	Provider	music	This service will update/ get music information.	Active	Root Resource
☐ No	MUSIC_ALIAS	Alias	Provider	music	This service will get update/ get music alias information	Inactive	Root Resource
☐ No	MUSIC_CONSUMER	Primary	Consumer	musiccon	Consumer Service that calls the MUSIC Provider service	Active	Root Resource
☐ No	PETSTORE	Primary	Provider	pets	pet store services	Active	Root Resource
☐ No	PET_ALIAS	Alias	Provider	pets	pet services	Active	Root Resource

[Select All](#)
[Deselect All](#)

Field or Control	Description
Search	Expand the Search section to search for Application Services based on Application Service ID, Service URL ID, Service Type, Service Group, and Service Category.
Activate and Inactivate button.	To activate or inactivate, select the appropriate button.
Select	Select the Application Services in the grid by selecting each row or by selecting the Select all at the bottom of the grid. The status of each selected row will be updated based on the activate option that is selected.
Root Resource	Use this link to activate or inactivate a root resource.

Prioritization of Application Services

An Alias Root Resource will always have priority over its associated Primary if both are Active. Therefore the logic to determine what Root Resource (Primary or Alias) to invoke is as follows for each invocation of a REST API end-point.

- Is the Alias Application Service active (if not use the Primary Application Service, if active).
- Is the Alias Root Resource active (if not use the associated Primary Root Resource, if active).

Copyright © 1988, 2025, Oracle and/or its affiliates.

689

Activating or Inactivating Root Resource

The administrator can activate or inactivate root resources by selecting the appropriate root resource link.

This example illustrates the fields and controls on the Root Resources page.

Cancel

Root Resources

Done

2 rows

App Service ID ↕	Service Type ↕	Root Resource ↕	Description ↕	*Status ↕
PETSTORE	Primary	pet	all about pets	Active ▾
PETSTORE	Primary	store	pet store orders	Active Inactive

Select the status for the root resource and click Done.

Deleting Application Services

Use the Delete Application Services page to delete an Application Service.

Deletion of the Application Service will also delete all the associated IB metadata (Service, Service Operation, Routing, Document, permissions and so forth). An Application Service defined as Primary can only be deleted if the associated Alias has been subsequently deleted.

Only one Application Service can be deleted at a time. The Delete button will be grayed under the following conditions:

- The Application Service has been exported. In order to delete the Application Service, you must first delete the export of the Application Service. See [Exporting Application Services](#)
- The Application Service has an associated Alias Service. The Alias Service must first be deleted in order to delete the Primary.

Select **PeopleTools > Integration Broker > Application Services > Administration > Delete Application Services**

This example illustrates the fields and controls on the Delete Application Services page. You can find definitions for the fields and controls later on this page.

Delete Services

Delete Services

Search Criteria

App Service ID

Q

Service Type

Service URL ID

Q

Service Group

Q

Service Category

Search

Clear

Application Services

9 rows

Delete	App Service ID	Service Type	Category	Service URL ID	Description	Status	Export	Delete Status
Delete	CHATBOT_TEST	Primary	Provider	chatbot	This is to test Chatbot Integrations.	Active	N	
Delete	FLIGHTDATA	Primary	Provider	flightdata	Information about Flight Data	Active	N	
Delete	MCFOAUTHOUTBOUND	Primary	Provider	ptmcfoauth	Get OAuth2 token for MCFOutboundEmail	Active	N	
Delete	MUSIC	Primary	Provider	music	This service will update/ get music information.	Active	Y	
Delete	MUSIC_ALIAS	Alias	Provider	music	This service will get update/ get music alias information	Inactive	Y	
Delete	MUSIC_CONSUMER	Primary	Consumer	musiccon	Consumer Service that calls the MUSIC Provider service	Active	N	
Delete	PETSTORE	Primary	Provider	pets	pet store services	Active	Y	
Delete	PET_ALIAS	Alias	Provider	pets	pet services	Active	N	

A Primary can not be deleted if an Alias exists, you must first delete the Alias.

Select Delete for the Application Service to delete. You will be prompted to confirm the delete.

Exporting Application Services

The Application Service must be exported to create the REST API web service. Exporting the Application Service will create an Open API document describing the Service. Only the root resources with a status of active are exposed and exported.

If the Primary Application Service has an Alias then the root resources that are exported are based on the Alias status. All active Alias root resources as well as any active Primary root resources that are not defined on an associated Alias.

Select **PeopleTools > Integration Broker > Application Services > Administration > Export Application Services**.

This example illustrates the fields and controls on the Export Open API page. You can find definitions for the fields and controls later on this page.

Search Criteria

Use the Search Criteria section to search based on Application Service ID, Service URL ID and Server Group. Search results will only include active Primary Application Services. If the Primary Application Service is inactive and the Alias is active, then Alias displayed.

Information

Use the Information section to optionally add fields that will be used as part of the Open API to describe the Application Service.

Field or Control	Description
Contact Name	The identifying name of the contact person or organization.
Contact URL	The URL pointing to the contact information. Must be in the format of a URL.
Contact Email	The email address of the contact person/organization. Must be in the format of an email address.
License Name	The license information for the exposed API.
License URL	A URL to the license used for the API. Must be in the format of a URL.

Field or Control	Description
External Documentation	A short description of the target documentation.
External Documentation URL	The URL for the target documentation. Must be in the format of a URL.
Terms of Service	A URL to the Terms of Service for the API. Must be in the format of a URL.
Authorization URL	The authorization URL to be used for this flow (for OAuth2).

Application Services Search Results

The results of the search will show Application Services with their Export status. The administrator can select one or more Application Service to Export or Delete (if already exported).

Field or Control	Description
Export Selected	Select this button to create the OpenAPI for the selected Application Services.
Delete Selected OpenAPI	Select this button to delete the Open API for the selected Application Services.
Select	Select Yes for the Application Service to either export or delete OpenAPI.
Root Resource	Click the link to view the root resources. The Root Resource page will show the root resources to be exported. For a Primary Application Service both primary and alias resources are displayed. For Alias Application Services, only alias root resources are displayed.

This example illustrates the fields and controls on the Example Exported Application Service. You can find definitions for the fields and controls later on this page

Export Open API

Export Open API

Export Chatbot

Export Service

Search Criteria

App Service ID

MUSIC

Q

Service URL ID

Q

Service Group

Q

Search

Clear

> Information

Application Services

Export Selected

Delete Selected OpenAPI

1 row

Select

No

MUSIC

Primary

music

This service will get and update music information.

Active

Y

OpenAPI

Select All

Deselect All

Field or Control	Description
Exported	Export Status is Y.
OpenAPI	For Exported Services a View OpenAPI link will be displayed. When Selected the OpenAPI document will be displayed in JSON format.

Example Open API


Select the Open API link to view the generated Open API.

This example illustrates an Open API.



The JSON can be copied (or use the Open API URL displayed on the top of the page) and loaded into any OpenAPI Editor to view the document in human readable form.

This example of an OpenAPI in Swagger Editor.

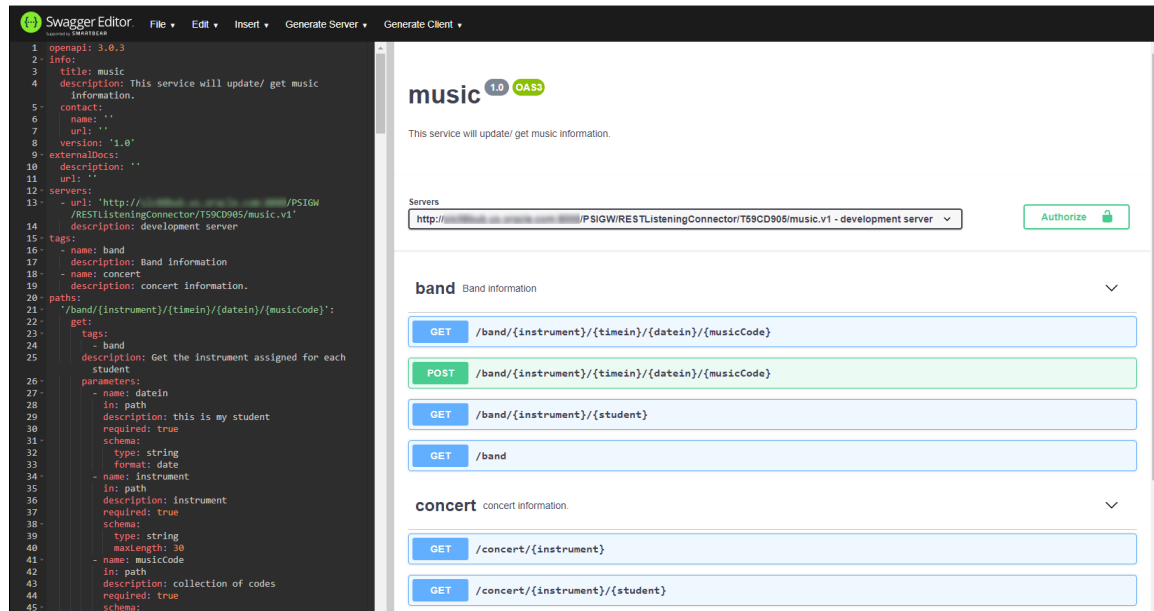

Discovering REST API

The PeopleSoft delivered service operation PTIB_SERVICELIST_GET is used to list all exported services accessible to a 3rd party. The administrator can add the appropriate level of security on the service operation (SSL, Basic Auth, oAuth2, None) .

Here is an example of the URL that the 3rd party would invoke:

`http://<base REST target location>/PSIGW/RESTListeningConnector/T59KAC14/servicelis⇒
t.v1/discovery`

This example illustrates an example service list discovery.



```

{
  "version" : "1.0",
  "title" : "list of services",
  "ProductArea" : [
    {
      "AreaName" : "PeopleTools 8.59.00.000",
      "modules" : [
        {
          "ModuleName" : "media",
          "services" : [
            {
              "name" : "music",
              "description" : "This service will update/ get music information.",
              "href" :
"http://slid874p.us.oracle.com:8000/PSIGW/RESTListeningConnector/T59CD905/music.1.api"
            }
          ]
        },
        {
          "ModuleName" : "",
          "services" : [
            {
              "name" : "pets",
              "description" : "pet store services",
              "href" :
"http://slid874p.us.oracle.com:8000/PSIGW/RESTListeningConnector/T59CD905/pets.1.api"
            }
          ]
        }
      ]
    }
  ]
}

```

When this REST API is invoked it will return a list of exported services containing a link to the OpenAPI for each service in JSON.

This discovery service is used by Oracle's Integration Cloud (OCI) service. A PeopleSoft OIC adapter will be built based on this service.

Exporting Chatbots

In order for Oracle Digital Assistant (ODA) to make call backs into PeopleSoft, the skill must be created in ODA.

The Export Chatbot page is used to generate custom components for ODA usage from the Application Service metadata.

Refer to Chatbot specific documentation on how to build Chatbot integrations in ODA.

Select **PeopleTools > Integration Broker > Application Services > Administration > Export Application Services > Export Chatbots** tab.

This example illustrates the fields and controls on the Export Chatbot page. You can find definitions for the fields and controls later on this page.

Export Chatbot

Export Open API

Export Chatbot

Search Criteria

App Service ID

Service URL ID

Service Group

Search

Clear

Application Services

Chatbot Discovery

6 rows

Export Service	App Service ID	Service Type	Service URL ID	Description	Status	Root Resources	Chatbot Discovery
☒ Yes	CHATBOT_TEST	Primary	chatbot	This is to test Chatbot Integrations.	Active	Root Resources	Chatbot Discovery
☐ No	FLIGHTDATA	Primary	flightdata	Information about Flight Data	Active	Root Resources	
☐ No	MCFOAUTHOUTBOUND	Primary	ptmcfoauth	Get OAuth2 token for MCFOutboundEmail	Active	Root Resources	
☐ No	MUSIC	Primary	music	This service will update/ get music information.	Active	Root Resources	
☐ No	PETSTORE	Primary	pets	pet store services	Active	Root Resources	
☐ No	WEATHER	Primary	weather	This will get all Weather information.	Active	Root Resources	

[Enable All](#)
[Disable All](#)

Search for Application Services based on Application Service ID, Service URL ID, and Server Group.

Search Results will return:

- Active Primary Application Service meeting the selection criteria.
- Alias Application Service if the primary is inactive and the Alias is active.

Field or Control	Description
Chatbot Discovery	The Chatbot Discovery link at the top of the Export Services grid will show all export enabled Application Services and their associated component names.
Export Service	Select Yes to export a service.
Root Resources	Select this link to open the Root Resources page for the Application Service.
Chatbot Discovery	The Chatbot Discovery link on Export Services grid will show the Application Service and its associated component names.

The results of the search will show Application Services with their export status (Export Service toggled to Yes). The administrator can select one or more Application Service to generate a Discovery Chatbot document. There is no Save on this page as the Discovery Chatbot documentation will be generated based on selection.

Criteria for Generation of Discovery Chatbot Documentation

Select the Root Resources link on the Export Chatbot page to open the Root Resources page for the Application Service. The Root Resource page will show the Root Resources expanded to display all URI Indexes and their associated Methods. This page will also include both Primary and Alias Resources based on Active Status.

This example illustrates the fields and controls on the Root Resources page to define the Component for ODA

Root Resources

Done

▼ band (Application Service: MUSIC, Service Type: Primary)

Chatbot Discovery

Index	Method	Description	Component (ODA)	Chatbot Discovery
1	GET	Get the instrument assigned for each student	PS.MUSIC_ONE	Chatbot Discovery
1	POST	Update the instrument assigned for each student	PS.MUSIC_TWO	Chatbot Discovery
2	GET	Get List of students for an instrument.	PS.MUSIC_THREE	Chatbot Discovery
3	GET	Get Instrument	PS.MUSIC_FOUR	Chatbot Discovery

▼ concert (Application Service: MUSIC, Service Type: Primary)

Chatbot Discovery

Index	Method	Description	Component (ODA)	Chatbot Discovery
1	GET	Student playing the instrument.	PS.MUSIC_FIVE	Chatbot Discovery
2	GET	get actual players	PS.MUSIC_SIX	Chatbot Discovery

A unique Component (ODA) name for must be entered for each Index/method to be included in the Chatbot Discovery. This component name is used on the People Soft Component to define the Chatbot Integration.


Field or Control	Description
Chatbot Delivery	The Chatbot Discovery link for the Route Resource show the all the Root's associated Component names.

Field or Control	Description
Component (ODA)	Component (ODA) naming criteria. 1. The Component name entered must be unique across all Primary Application Services as that name is used to define the Component name in ODA. 2. An Alias Component name can be the same as any of its associated Primary Root component names. However all Alias names must also be unique. 3. Component names are editable only if the Component name does not already exist in the old Chatbot tables and is not used on an Alias Component name. Note: Name must be unique for potential backporting.
Chatbot Discovery	If a component name is entered, this link for the component will show the component name information..

Viewing Chatbot Discovery

Selection of a Chatbot discovery link will bring up the Chatbot Discovery page. The top of the page will show the associated Chatbot Discovery URL. The developer can use this URL to alternatively retrieve the Chatbot Discovery information via a browser if they have proper permissions. The JSON data can then be copied and entered into the PeopleSoft Component to build out the ODA skills template.

This example illustrates the Chatbot Discovery page.

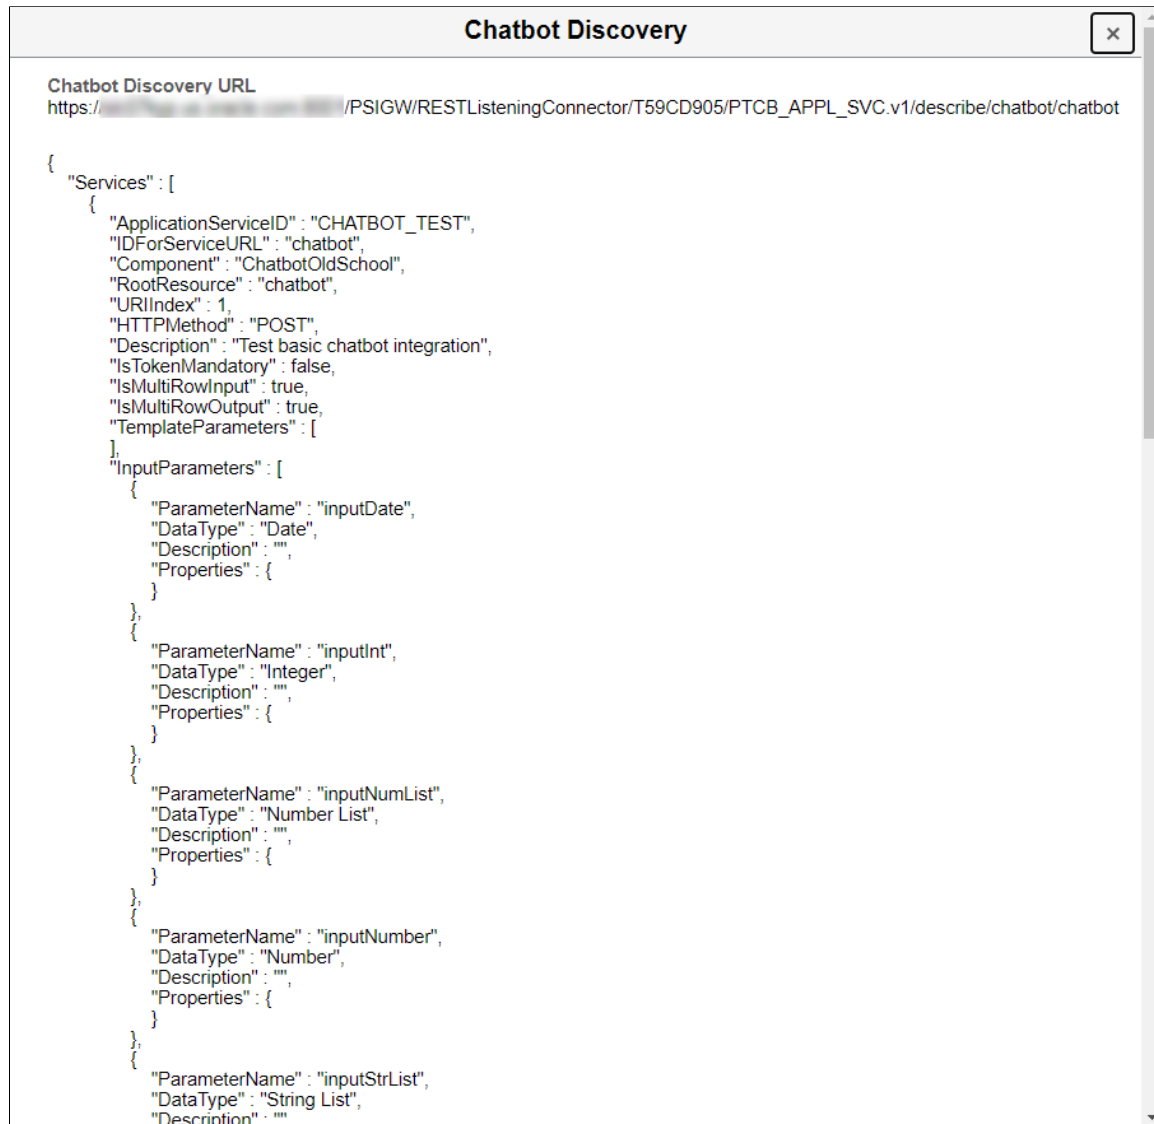

Using Application Service Utilities

Converting Chatbot Services

Starting with PeopleTools 8.59, a new Application Services Framework has been created to comply with all Oracle REST standards. PeopleSoft delivered Application Services will be modified to meet the Oracle REST standard. PeopleTools 8.59 delivers a Chatbot conversion utility to convert old Chatbot Application Services into the new Application Services framework in order to run under 8.59 tools release.

For customer performing a PeopleTools Only Upgrade to 8.59:

- Chatbot conversion is run as part of the PeopleTools Only upgrade.

See [Converting Chatbot Service](#).

- After the PeopleTools Only upgrade existing Chatbots will continue to run without any coding changes, however they will not be compliant with Oracle REST standards.
- When the PeopleSoft Image for your application is available on PeopleTools 8.59, new updated Application Service will be included. These Application Services are mapped to the old Application Service ID. When you select to include the new Application Service in a Change Package, it will replace the non-compliant converted Application Service.

See [Mapping Service Application](#).

The Chatbot Conversion Utility is available and can run manually if the conversion needs to be rerun.

See [Using the Chatbot Conversion Utility](#).

Using the Chatbot Conversion Utility

The following steps are used to manually convert a Chatbot Service:

1. Convert the old Application Service. Select PeopleTools, Integration Broker, Application Services, Application Service Utilities, Chatbot Services Conversion.

This will create the new Application Service.

2. Map the Application Service back to the old ID for service URL. Select PeopleTools, Integration Broker, Application Services, Application Service Utilities, Chatbot Services Conversion, Mapping page.

This is the name that ODA uses as the name on the URL.

3. Export the Chatbot Service. Select PeopleTools, Integration Broker, Application Services, Administration, Export Application Service, Export Chatbot page.

4. Test the Application Service.

Note: After converting the chatbot, it will run in PeopleTools 8.59, however the chatbot is not compliant as a REST web service. See [Updating Converted Application Services for Compliance](#). Compliant PeopleSoft Application Services will be delivered in a PeopleSoft Update Image.


Converting Chatbot Service

When an Chatbot Service is selected for conversion, the value for *ID for service URL* will be modified to conform to the Oracle REST standard. The new Service URL ID is also validated to ensure that the value is not a current IB Service Alias. Optionally, the administrator can update the value in the Service URL ID (new) edit box. The conversion page will then copy the data out of the old Application Service tables and build a new Application Service in the new framework.

Note: The old application service will not be deleted as part of the conversion process. If you need to rerun the conversion process, you must first delete the new application service using the Delete Application Service page. See [Deleting Application Services](#)

Select **PeopleTools > Integration Broker > Application Services > Application Service Utilities > Chatbot Service Conversion**.

This example illustrates the fields and controls on the Chatbot Conversion page. You can find definitions for the fields and controls later on this page.

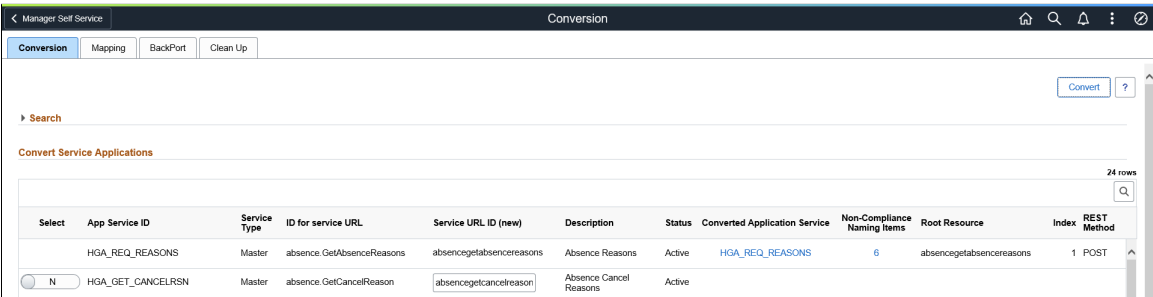

Field or Control	Description
Select	Select Y to convert the application service. For Application Services that have already been converted, the selection option will be disabled.
App Service ID	Existing chatbot service that requires conversion.
Service Type	Displays service type.
ID for Service URL	Existing ID for service URL that needs to be converted.
Service URL ID (new)	Displays the new Service ID URL. The administrator can optionally update the value in the Service URL ID edit box.

Field or Control	Description
Description	Description of the existing application service.
Status	Status of the exiting application service.
Converted Application Service	Displays the name of the converted Application Service. Click this link to view or edit the Application Service.
Non-Compliant Naming Items	Indicates the number of non-compliant items after conversion. Select this link to display the non-compliant naming values such as Root Resource Name, Input/ Output parameters, URI Template, and no JSON description (schema) for types of Compound, Compound Array and Custom.
Root Resource	Displays the name of the new root resource after conversion.
Index	Displays URI Index used for the converted application service.
REST Method	Displays the REST method created for the converted application service.

Mapping Service Application

Existing Chatbots will be converted to Application Services in PeopleTools 8.59 and delivered in updates with new PeopleSoft Images. Since the customer's target database may be on a previous release, this page is used to map the modified Application Service to the original old Application Service. This mapping is required for proper backporting and to generate a properly defined Chatbot discovery document. This mapping is also used to insure proper conversion of customer's Alias Application Services and to remove *orphaned* new Application Services.

Note: This mapping is typically performed by PeopleSoft developer as it is only necessary to backport Application Services to an older release. However, if a customer performs a tools only upgrade and makes a change to the Application Service which requires the discover document to be re-exported, the customer would first need to perform the mapping in order for the Component name to displayed.

Select **PeopleTools > Integration Broker > Application Services > Application Service Utilities > Chatbot Service Conversion > Mapping tab**

This example illustrates the fields and controls on the Chatbot Conversion Mapping page from a PeopleSoft Update Image. You can find definitions for the fields and controls later on this page.

App Service ID	Root Resource	Index	REST Method	ID for service URL (old)
BEN_CHATBOT_SVC	viewbenefitsinfo	1	GET	benefit.SystemInfo
BEN_CHATBOT_SVC	viewbenefitsinfo	2	GET	benefit.AdminContact
BEN_CHATBOT_SVC	viewplanlist	1	GET	benefit.PlanCategory
BEN_CHATBOT_SVC	viewplanlist	2	GET	benefit.PlanType

When PeopleSoft delivers a new Oracle compliant Application Service for a converted chatbot, the mapping page will be updated to map the Application Services to the old ID for the service URL.

Backporting Chatbot

The BackPort page is used for Application Services that need to be backported to an earlier PeopleTools release (8.58 or 8.57).

This example illustrates the fields and controls on the BackPort page.

Select	App Service ID	Root Resource	Index	REST Method	App Service ID (old)	ID for service URL (old)
☐	BEN_CHATBOT_SVC	viewbenefitsinfo	1	GET	BEN_SVC_SYS	benefit.SystemInfo
☐	BEN_CHATBOT_SVC	viewbenefitsinfo	2	GET	BEN_SVC_CONTACT	benefit.AdminContact
☐	BEN_CHATBOT_SVC	viewplanlist	1	GET	BEN_SVC_PLAN_CATE	benefit.PlanCategory
☐	BEN_CHATBOT_SVC	viewplanlist	2	GET	BEN_SVC_PLAN_TYPE	benefit.PlanType
☐	BEN_CHATBOT_SVC	viewplandetail	1	GET	BEN_SVC_DEP_BEN	benefit.RegDepBen
☐	BEN_CHATBOT_SVC	viewplandetail	2	GET	BEN_SVC_ENROLLED_DEPBEN	benefit.EnrolledDepBen

- For Application Services defined in a previous PeopleTools release the value is populated (read only).
- For new Application Services this information needs to be populated.

When the page is saved checks are performed to insure the data can be properly backported. The following checks are performed:

- Template, input, output parameter names must be unique.

If a duplicate parameter defined the save will not occur and the developer would need to update the Application Service accordingly.

- No headers are backported.

If save is successful, the old chatbot tables are populated. The metadata can be added to an ADS project.

Cleaning Up Chatbots

Clean up is required in the following scenario:

1. Customer performs a tools only upgrade to PeopleTools 8.59.
2. Customer updates the old Chatbot Application Service.
3. PeopleSoft delivers an Application Service update that includes the same Application Service where the metadata has been modified to be compliant with Oracle standards.

In this case some of the old Chatbot Services are merged into a single Application Service.

4. When the customer takes the Application upgrade, both the updated Application Services as well as the original Application Services exist in the database.
5. The customer upgraded Application Services is then *orphaned* as they can not be called from Oracle Digital Assistant (ODA).

This example illustrates the fields and controls on the Clean Up page where there are 2 orphaned Application Services.

Conversion	Mapping	BackPort	Clean Up
▼ Orphaned Master Application Services			
2 rows			
App Service ID	Description	ID for service URL (old)	Delete
HGA_EMP_JOBS	Employee Jobs	absence.GetEmployeeJobs	Delete
HGA_VALIDATE_TAKE	Validate Absence Name	absence.ValidateAbsenceName	Delete
▼ Mapping of Orphaned Alias Application Services			
1 row			
Alias Appl Service ID	App Service ID	Root Resource	Index REST Method
HGA_GET_USERFIELDS	MUSIC	absence.validateabsence.name	1 POST

If the orphaned Application Service has an associated orphaned Alias, the Delete button is disabled. In this case it is necessary to create a new Alias Application Service and add the necessary root resources to override the primary root resources before you can delete the orphaned alias Application Service using the Delete Application Service page.

Use the Delete button to remove any Application Services from the new data model that are considered *Orphaned Services*.

Updating Converted Application Services for Compliance

After converting the Chatbot Application Service, it becomes necessary to update the Application Service for compliance if the Application Service will also be used as REST API. Perform the following steps to rearchitect the services.

Keep in mind, that these are no longer Chatbot services, they are REST Services that are being used for Chatbot.

1. Logically group services.

Chatbots are converted as individual services, however these converted services can be logically grouped by module.

2. Identify the proper HTTP method to use for each application service.

- GET - Retrieve information about a resource.
- POST - Create a resource.
- PUT - Update a resource.
- DELETE - Delete a resource.
- PATCH - Update partial resources.

3. Create URI Template.

The URI template is used to point to the resource.

4. Comply with naming standards.

Use Oracle naming standards for Service, Root, URI and Fields. The Application Service Framework (ASF) will verify the naming conforms to the standards.

5. Add descriptions.

Third parties use the descriptions to identify what the service does. These are REST API services that interface with Chatbot.

6. Identify Response Codes.

Third party will see the response code.

7. Create Headers for request/response if necessary.

Chatbots do not use headers. For a newly created resource you may want to add location header, which will point to the new resource.

8. Add exception detail resource type.

Ability to override what the third party will see for the exception.

Copying Integration Metadata between PeopleSoft Databases

Copying Integration Metadata Between PeopleSoft Databases

This section provides an overview of copying metadata between PeopleSoft 8.55 databases and discusses data dependencies and relationships when copying data.

Understanding Copying Integration Metadata Between PeopleSoft Databases

You can use PeopleSoft Application Designer's Project Copy functionality to copy integration metadata between PeopleSoft databases.

Message schema and WSDL became managed objects beginning with the PeopleTools 8.50 release. As a result, you can use Project Copy to copy message schemas and WSDL documents between PeopleTools 8.50 and higher databases. However, to copy schema and WSDL between PeopleTools 8.50 and higher databases and PeopleTools 8.49 or PeopleTools 8.48 databases, you must use the provided data mover scripts. These data mover scripts are discussed elsewhere in this topic.

See [Using Data Mover Scripts to Copy Message Schema and WSDL Data](#).

Related Links

“Copying Projects” (Lifecycle Management Guide)

Understanding Data Dependencies and Relationships for Copying Data

When copying data between databases, you must be aware of data dependencies and relationships to ensure that no errors occur and to lessen the chance of encountering orphaned data.

Note: References to 'Project Copy' in the following table are references to the Project Copy feature in PeopleSoft Application Designer.

<i>Object Name</i>	<i>Comments</i>
Services.	You can use Project Copy to copy services between databases. WSDL documents that exist for a service are not automatically copied with a service. You must include them in the copy project.

Object Name	Comments
WSDL documents.	To copy WSDL to another PeopleTools 8.55 system, use Project Copy. To copy WSDL to earlier releases of PeopleTools, you must use data mover scripts to copy the data to the target database.
Service operations.	A service operation is tied to a service. If you copy a service operation in a project, the target database must already contain the service to which the service operation is tied in the database. If it does not, you must include that service in the copy project. Service operations cannot exist in a database without at least one service operation version - the default version. So when copying a service operation between databases, you need to be aware what the default service operation is and that you may possibly have to copy it to the target database as well. In addition, keep in mind that the relationship between services and service operations is stored as part of the Service object. So for example, if a service contains three operations and you delete one of the three operations, you must include the service in the project. After the operation delete, the service is now linked to the remaining two operations and so it has changed and would need to be copied to the target database. It is not be enough to only copy the deleted operation in a Delete project; Deleting just the service operation doesn't delete the link to the service. If you don't follow this recommendation, you'll have orphaned data.
Service operation versions.	A service operation version refers to a specific service operation. If you copy a service operation version, the target database must already contain the service operation. If it does not, you must include that service operation in the copy project. In addition, service operation versions refer to messages. If you copy a service operation version, the messages that are referenced for that service operation version must exist on the target database. If they do not, you must include them in the copy project. If WSDL documents have been generated for a service operation version, they are not automatically copied during the Project Copy process. Further, once you have copied a service operation version to the target database, it may appear that WSDL documents exist for a service operation version, when they do not. To avoid this situation, after you copy a service operation version to the target database, open the service definition to which the service operation belongs. If the View WSDL link appears, and when you click it WSDL appears, go back to the source database and export the generated WSDL documents to the target database. Another option is to delete the WSDL documents associated with a service operation before the Project Copy, and regenerate them on the target database.

Object Name	Comments
Service operation handlers.	A service operation handler refers to a specific service operation. If you copy a service operation handler, the target database must already contain the service operation to which the handler refers. If it does not, you must include that service operation in the copy project.
Service operation routings.	Routing names are keys in the system. If you copy a routing, the sending and receiving nodes must be defined on the target database. If they are not defined on the target database, you must include them in your copy project. Routings reference a specific service operation version. If you copy a routing, the target database must already contain the service operation version to which the routing refers. If it does not, you must include that service operation version in the project. Routings also reference nodes. If you copy a routing, the target database must already contain the nodes being referenced. An exception to this is the local default node. During project copy, any routing referencing the local default node will be modified to reference the default local node of the target system. If the system detects a duplicate routing definition during the project copy process, the routing definition in the project being copied overwrites the routing definition in the database. This internal check occurs only when you use the Copy from File option during project copy. If during the copy process the system overwrites a duplicate service operation routing on the target system, you may receive a system message that the service operation routing was deleted. The service operation routing deleted is the service operation routing that resided on the target system before the project copy process. To identify duplicate routings when using the Database to Database option during project copy, or to detect and delete any duplicate routings in the database outside the project copy process, run the duplicate routings check using the Delete Duplicate Routings section of the Service Administration–Routings page. See Deleting Duplicate Routing Definitions.
Messages.	Container messages and message parts must have message schemas to function properly. You should also move message schemas along with your messages.
Service operation queues.	NA

Object Name	Comments
Message schemas.	To copy message schemas to another PeopleTools 8.55 system, use Project Copy. To copy message schemas to earlier releases of PeopleTools, you must use data mover scripts to copy the data to the target database. You should copy message schema along with all messages you copy from one database to another.
Documents	When you include a document in a copy project, the system inserts the document and all related definitions into the project. To copy a document message type, when you specify the message, you must also include the document as a related definition.
Integration Groups	NA

Related Links

[Using Data Mover Scripts to Copy Message Schema and WSDL Data](#)

Using Data Mover Scripts to Copy Message Schema and WSDL Data

In PeopleTools 8.50 message schema and WSDL documents became managed objects.

To move message schema and WSDL documents from PeopleTools 8.50 and later databases to PeopleTools 8.48 databases or PeopleTools 8.49 databases, use the data mover scripts described in the following table. These scripts are located in the <PS_HOME>\scripts directory.

Object	Script Name	Description
Message schema.	PSIBMSGSCHEMA_EXP.DMS	Export a message schema from a PeopleTools 8.55 database.
Message schema.	PSIBMSGSCHEMA_IMP.DMS	Import a message schema into a PeopleTools 8.55 database.
WSDL document.	PSIBWSDL_EXP.DMS	Export a WSDL document from a PeopleTools 8.55 database.
WSDL document.	PSIBWSDL_IMP.DMS	Import a WSDL document into a PeopleTools 8.55 database.

The WSDL data mover scripts move WSDL by WSDL name, not service name. Therefore it is possible to select specific WSDL for importing/exporting for a given service.

You may encounter errors while moving large WSDL documents and schemas from a Microsoft SQL or Oracle platform to a Sybase or Db2 z/OS platform because of size restrictions in Db2. The maximum size of WSDL documents from Microsoft SQL or Oracle platforms to Db2 z/OS platforms is described in the following table:

Note: Beginning in PeopleTools 8.55 Informix and Sybase are no longer supported.

Source Platforms <i>(PeopleTools 8.50 and later)</i>	Target Platform <i>(PeopleTools 8.48 or PeopleTools 8.49)</i>	Maximum WSDL/Schema Size <i>(Bytes)</i>
- Microsoft SQL - Oracle - Informix (Not supported beginning in PeopleTools 8.55.)	Db2 – UNIX	32700
	(Not supported beginning in PeopleTools 8.55.)	
	Db2 z/OS	31744
	Sybase	32000
	(Not supported beginning in PeopleTools 8.55.)	

Converting WSDL Documents and Message Schemas to Managed Objects

This section discusses how to:

- Use the Metadata WSDL/Schema Convert page.
- Convert WSDL documents and message schemas to managed objects.
- Convert message schemas to managed objects.
- Delete data from the deprecated data repository.

Understanding Converting WSDL Documents and Message Schema to Managed Objects

This section discusses converting WSDL documents and XML message schema to managed objects. It also discusses the deprecated data repository.

WSDL Documents and Message Schema as Managed Objects

Beginning in PeopleTools 8.50, WSDL documents and XML message schema became managed objects.

After you copy WSDL and schema from earlier releases, PeopleSoft Integration Broker enables you to convert the data to managed objects. To copy WSDL and XML message schema from earlier versions of PeopleTools, use the data mover scripts described previously in this topic.

See [Using Data Mover Scripts to Copy Message Schema and WSDL Data](#).

In addition, during the PeopleTools upgrade process the system automatically attempts to convert WSDL and schema metadata into managed objects. However, if the system is unable to convert the copied or upgraded data, you can convert it in the PeopleTools 8.55 system.

Deprecated Data Repository

WSDL documents and XML message schema data that you copy from earlier PeopleTools releases to a PeopleTools 8.55 database is stored in a deprecated data repository in the database. WSDL and schema that do not properly convert to managed objects during the upgrade process are also stored in this repository.

After you convert WSDL and schema to managed objects, the system moves the data to the metadata repository.

You can leave data that you do not convert in the deprecated data repository, or you can delete it from the system.

Using the Metadata Convert/Schema Convert Page

Use the Service Administration – Metadata Convert/Schema Convert page (IB_META_CONV) to convert WSDL documents and message schemas to managed objects. To access the page select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin** and click the **Metadata WSDL/Schema Convert** tab.

This page illustrates the Service Administration – Metadata WSDL/Schema Convert page.

The screenshot shows the 'Metadata WSDL/Schema Convert' page. It features two main sections for converting data. The top section, 'Non-Metadata WSDL', has a search field for 'Service:', a 'Search' button, and a table with columns: Select, Service, WSDL Name, WSDL Exists, and Results. Below the table are 'Convert' and 'Delete' buttons. The bottom section, 'Non-Metadata Schemas', has a search field for 'Message Name:', a 'Search' button, and a table with columns: Select, Message, Version, Schema Exists, and Results. Below this table are 'Convert' and 'Delete' buttons, and a 'View Schema' link.

Use the top portion of the page to convert WSDL documents to managed objects. Use the bottom portion of the page to convert XML message schemas to managed objects. The page enables you to work with

one WSDL document or message schema at a time, or you can work with all data in the deprecated data repository at once.

When working with message schema, you can also use the provided **View Schema** link on the page to view schemas before converting them.

This page also enables you to delete data from the deprecated data repository that you do not want to convert to managed objects or that you no longer need.

The following sections describe how to accomplish these tasks in greater detail.

Converting WSDL Documents to Managed Objects

This section discusses how to convert WSDL documents to managed objects.

To convert a WSDL document to a managed object:

1. Access the Service Administration – Metadata WSDL/Schema Convert page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin** and click the **Metadata WSDL/Schema Convert** tab.
2. Select the WSDL document(s) to convert:
 - To select a specific service for which to convert WSDL, in the **Service** field, enter the service name.
 - To select from all services in the deprecated data repository, click the **Search** button under the Service field.

Search results appear in the Non-Metadata WSDL grid.

3. In the Non-Metadata WSDL grid, select the check box next to each service name for which to convert WSDL.

If a check appears in the **WSDL Exists** check box, WSDL already exists as a managed object for the service. You can choose to use the existing WSDL, or select the check box in the Select column to convert the WSDL again and overwrite the existing WSDL.

4. Click the **Convert** button under the Non-Metadata WSDL grid.
5. The status of the conversion for each service you selected appears in the **Results** field.

Converting Message Schemas to Managed Objects

This section discusses how to convert XML message schema to managed objects.

To convert message schemas to managed objects:

1. Access the Service Administration – Metadata WSDL/Schema Convert page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin** and click the **Metadata WSDL/Schema Convert** tab).
2. Select the XML message schema(s) to convert:
 - To select a specific schema to convert, in the **Message Name** field, enter the message name.

- To select from all schema in the deprecated data repository, click the **Search** button under the **Message Name** field.

Search results appear in the Non-Metadata Schemas grid.

3. In the Non-Metadata Schemas grid, select the check box next to each message name that contains the schema to convert.

If a check appears in the **Schema Exists** box, XML message schema already exists as a managed object for the message. You can choose to use the existing managed object schema, or select the check box in the Select column to convert the schema again and overwrite the existing schema.

4. Click the **Convert** button under the Non-Metadata Schemas grid.
5. The status of the conversion for each message schema that you converted appears in the Results field.

If you are unable to convert a schema to a managed object, rebuild the schema:

- For rowset-based messages, open the message in the Messages-Message Definition page and save the message. Upon Save, PeopleSoft Integration Broker automatically builds the schema for the message.
- For nonrowset-based messages use one of the following options to rebuild the schema:
 - Access the schema using the **View Schema** link on the Metadata Convert/Schema Convert page and copy it to the Messages-Schema page and correct and save the schema.
 - Access the schema using the **View Schema** link on the Metadata Convert/Schema Convert page and copy it into an XML editor and correct the schema. Then upload it into the system using the Messages-Schema page.
 - Upload or create a new schema using the Messages-Schema page.

Related Links

[Managing XML Message Schemas for Rowset-Based Messages](#)

[Adding Message Schemas to Nonrowset-Based Messages](#)

Deleting Data from the Deprecated Data Repository

This section discusses how to delete WSDL documents and XML message schemas from the deprecated data repository.

To delete data from the deprecated data repository:

1. Access the Service Administration – Metadata WSDL/Schema Convert page (**PeopleTools** > **Integration Broker** > **Service Utilities** > **Integration Broker Admin** and click the **Metadata WSDL/Schema Convert** tab).
2. Select the WSDL document(s) or XML message schema(s) to delete:
 - To select a specific WSDL document to delete, in the Service field, enter the service name.
 - To select from all services in the deprecated data repository, click the **Search** button under the Service field.

- To select a specific schema to delete, in the **Message Name** field, enter the message name.
- To select from all schema in the deprecated data repository, click the **Search** button under the **Message Name** field.

Search results appear in the appropriate WSDL or schema grid.

3. In the WSDL or schema grid, select the **Select** check box next to the data to delete.
4. Click the **Delete** button under the grid in which the data to delete appears.

Managing Nodes Copied Between Databases and Upgraded from Earlier PeopleTools Releases

The user ID on any nodes that you copy to a database using Project Copy or that you upgrade from earlier PeopleTools releases must be:

- Valid in the target database.
- Assigned to the permission lists of any service operation that you intend to use.

Integration Scenarios

Understanding the Integration Scenarios

This section lists several basic integration scenarios that you can implement using PeopleSoft Integration Broker. Overviews of each of these scenarios are provided in this topic. Other scenarios and configurations may exist that better suit your business requirements.

- [Integrating with PeopleSoft Integration Broker Systems](#)
 - [Integrating with PeopleSoft Integration Broker Systems Through Firewalls](#)
 - [Integrating with PeopleSoft Integration Broker Systems by Using Hubs](#)
 - [Integrating with Third-Party Systems](#)
 - [Integrating with Third-Party Systems by Using Remote Gateways](#)
 - [Integrating with PeopleTools 8.47 and Earlier PeopleTools 8.4x Systems](#)
 - [Integrating with PeopleTools 8.1x Systems](#)
-

Understanding Integration Setup for the Integration Scenarios

An integration engine is automatically installed as part of your PeopleSoft application, and an integration gateway is installed as part of the PeopleSoft Pure Internet Architecture. However, there's no requirement that your integration gateway be on the same machine as the integration engine.

In general, the high-level tasks that you perform to configure any of the integration scenarios are:

- Define a local integration gateway.
- Define a remote integration gateway.
- Set integration gateway properties.
- Set up a local node.
- Set up a remote node.
- Create service operations with inbound and outbound routing definitions.

You may not need to perform all of these tasks. For example, if you don't need to communicate through a firewall, you probably don't need to define a remote gateway.

Application messaging, the precursor to PeopleSoft Integration Broker, employed content-based routing—each message had to provide its own routing information, which was defined in the message header.

With PeopleSoft Integration Broker, you define the routing information separately. You can apply multiple routings to a message and change the routings independent of the message definition.

Defining Local and Remote Integration Gateways

On each PeopleSoft Integration Broker system in your configuration, you must specify a local integration gateway. The local gateway is the application's first point of contact with other PeopleSoft applications, third-party systems, PeopleSoft Integration Broker hubs, and remote gateways. You must define exactly one local gateway for each integration engine, but a single installed gateway can serve multiple engines. The web server where the integration gateway resides can be any machine on which you've installed the PeopleSoft Pure Internet Architecture.

To define the local gateway, use the Gateways component (IB_GATEWAY) to:

- Add the gateway that the application will use to communicate with other systems.
- Specify the uniform resource locator (URL) of the gateway's PeopleSoft listening connector.

This is the connector that receives messages from an integration engine (including the default local node) or another integration gateway.

- Register the target connectors that are delivered with PeopleSoft Integration Broker.

These target connectors are automatically installed during the PeopleSoft Pure Internet Architecture installation process. When you subsequently define local and remote nodes, you specify—from the list of installed target connectors—which connector the local gateway should use to send messages to each node.

Note: The remote gateway default connector setting in the `integrationGateway.properties` file, `ig.connector.defaultremoteconnector`, determines through which connector the gateway routes messages that are bound for other gateways. By default, this property is set to the HTTP target connector, `HTTPTARGET`. Never change this setting unless you develop a custom connector to handle this routing.

An integration gateway also includes a set of listening connectors, which are likewise installed with the PeopleSoft Pure Internet Architecture. You don't need to specify these connectors directly; third-party systems send messages to the gateway by specifying the URL of an appropriate listening connector.

Setting Integration Gateway Properties

You set integration gateway properties by using the gateway's primary configuration file, called `integrationGateway.properties`. You must set an Oracle Jolt connect string in this file to enable communication with each PeopleSoft Integration Broker node that will be involved in an integration that uses this gateway.

The following example shows the required Oracle Jolt connect string setting:

```
ig.isc.<nodename>.serverURL=//<machine_name>:<jolt_port>
ig.isc.<nodename>.userid=<database_user_id>
ig.isc.<nodename>.password=<database_password>
ig.isc.<nodename>.toolsRel=<peopletools_release_version>
```

Note: You can also configure a default Oracle Jolt connect string to specify the target node to use when a message arrives at the gateway but doesn't specify a node name matching any of the existing entries. The default Oracle Jolt connect string settings are identical to the others, except that they don't include a node name. You can specify any PeopleSoft Integration Broker node as the default node, including any of the existing entries.

Configuring Local and Remote Nodes

Use the Nodes component (IB_NODE) to configure local and remote nodes.

When you configure nodes, use the Nodes - Connectors page to specify the gateway and target connector to use to send messages to each node. Use the information in the following table as a guide for choosing the appropriate information for the configuration scenarios that are described in this topic:

Scenario	System	Node Definition	Connector
PeopleSoft as a web service provider.	NA	NA.	Not applicable (NA)*
PeopleSoft Integration Broker to PeopleSoft Integration Broker.	Both applications.	Default local.	NA*
PeopleSoft Integration Broker to PeopleSoft Integration Broker.	Both applications.	Remote.	PSFTTARGET (PeopleSoft target connector)
PeopleSoft Integration Broker to PeopleSoft systems.	Both applications.	Default local.	NA*
PeopleSoft Integration Broker to PeopleSoft systems.	Both applications.	Remote.	PSFTTARGET (PeopleSoft target connector)
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a remote gateway.	Both applications.	Default local.	NA*
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a remote gateway.	Both applications.	Remote.	PSFTTARGET
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a hub.	Both applications.	Default local.	NA*

Scenario	System	Node Definition	Connector
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a hub.	Both applications.	Remote.	PSFTTARGET
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a hub.	PeopleSoft Integration Broker hub.	Default local.	NA*
PeopleSoft Integration Broker to PeopleSoft Integration Broker by using a hub.	PeopleSoft Integration Broker hub.	Remote	PSFTTARGET
PeopleSoft Integration Broker to a third party.	PeopleSoft Integration Broker.	Default local.	NA*
PeopleSoft Integration Broker to a third party.	PeopleSoft Integration Broker.	Remote.	Third-party connector, as appropriate: • HTTPPTARGET (HTTP target connector) • JMSTARGET (Java Message Service [JMS] target connector) target connector) • SMTPPTARGET (Simple Mail Transfer Protocol [SMTP] target connector)
PeopleSoft Integration Broker to a third party.	Third-party system.	NA.	NA
PeopleSoft Integration Broker to a third party by using a remote gateway.	PeopleSoft Integration Broker.	Default local.	NA*
PeopleSoft Integration Broker to a third party by using a remote gateway.	PeopleSoft Integration Broker.	Remote.	Third-party connector, as appropriate: • HTTPPTARGET • JMSTARGET • SMTPPTARGET

Scenario	System	Node Definition	Connector
PeopleSoft Integration Broker to a third party by using a remote gateway.	Third-party system.	NA.	NA
PeopleSoft Integration Broker to PeopleSoft Integration Broker on PeopleTools 8.47 and earlier PeopleTools 8.4x systems.	Both applications.	Default local.	NA
PeopleSoft Integration Broker to PeopleSoft Integration Broker on PeopleTools 8.47 and earlier PeopleTools 8.4x systems.	Both applications.	Remote.	PSFTTARGET (PeopleSoft target connector)
PeopleSoft Integration Broker to PeopleTools 8.1x systems.	PeopleSoft Integration Broker.	Default local.	NA*
PeopleSoft Integration Broker to PeopleTools 8.1x systems.	PeopleSoft Integration Broker.	Remote.	PSFT81TARGET (PeopleSoft 8.1 target connector)
PeopleSoft Integration Broker to PeopleTools 8.1x systems.	PeopleSoft 8.1x system.	NA. Set up message nodes, message channels, messages, and so on.	NA

* The default connector is PSFTTARGET, but it is not used.

Related Links

- “Using the integrationGateway.properties File” (Integration Broker Administration)
- “Administering Integration Gateways” (Integration Broker Administration)
- “Adding Node Definitions” (Integration Broker Administration)
- “Configuring Nodes” (Integration Broker Administration)


Integrating with PeopleSoft Integration Broker Systems

This section provides an overview of this scenario and discusses how to configure the system for this scenario.

Understanding This Scenario

In this scenario a PeopleSoft Human Resources system is integrating with a PeopleSoft Customer Relationship Management system on PeopleTools. Both systems are on the same PeopleTools release.

This diagram illustrates a PeopleSoft Human Resources (HR) system communicating with a PeopleSoft Customer Relationship Management (CRM) system and shows the configuration and interaction of PeopleSoft Integration Broker components

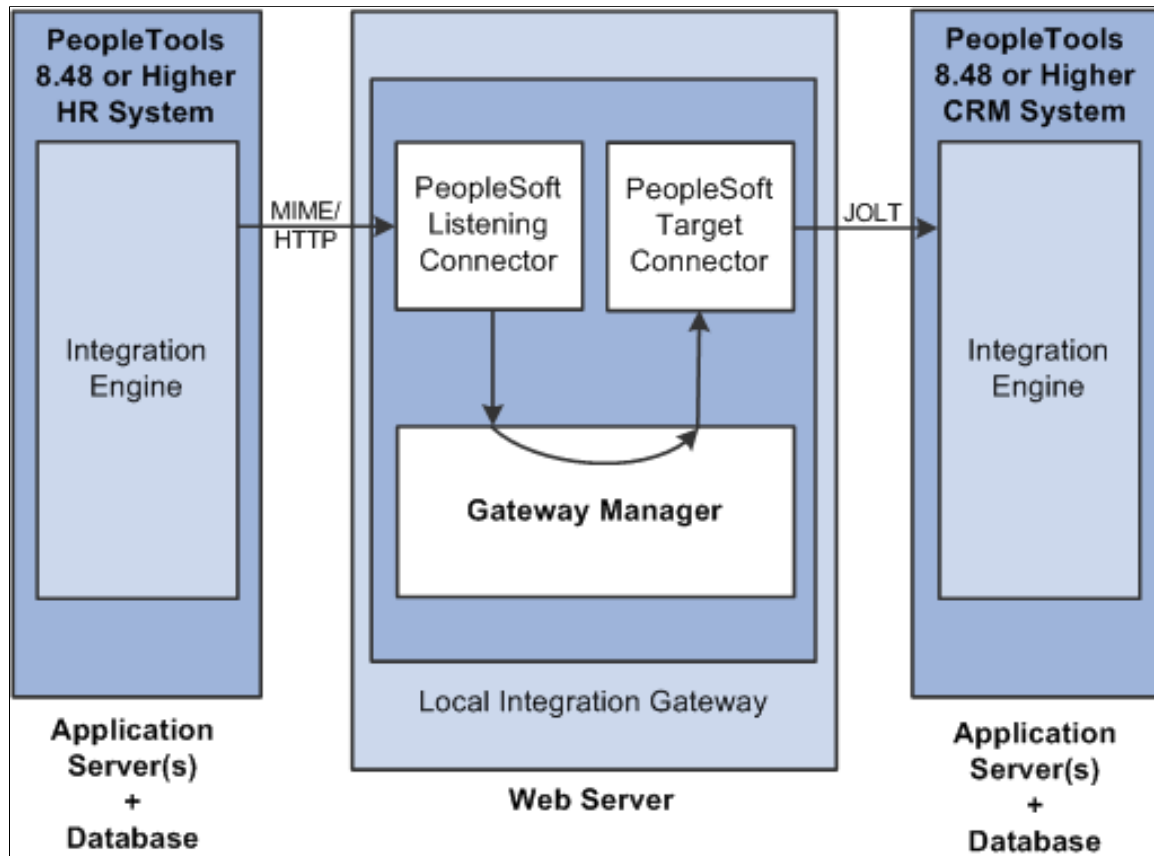

This communication can be synchronous or asynchronous.

Configuring the System for This Scenario

This section describes the source and destination system configuration tasks, based on the scenario shown in the previous diagram. In this example, the PeopleSoft Human Resources system is the source system and the PeopleSoft CRM system is the destination system.

This section discusses how to configure:

- The integration gateway.
- The PeopleSoft Human Resources system.
- The PeopleSoft CRM system.

Configuring the Integration Gateway

The only required property that you must set for the local gateway is the Oracle Jolt connect strings that enable the gateway to find the PeopleSoft CRM system. Set this property in the `integrationGateway.properties` file.

Configuring the PeopleSoft Human Resources System

Perform the following tasks on the PeopleSoft Human Resources system:

1. Define the local integration gateway for the PeopleSoft Human Resources system by using the Gateways component.

Any integration gateway that you've installed and configured to find the PeopleSoft CRM system can serve this role. Specify the gateway's PeopleSoft listening connector as the gateway's URL.

2. Configure the default local node definition that represents the PeopleSoft system by using the Nodes component.

This node is delivered predefined on the system.

3. Define a remote node to represent the PeopleSoft CRM system.

Because the PeopleSoft CRM system uses PeopleSoft Integration Broker, specify the local gateway for the PeopleSoft Human Resources system and its PeopleSoft target connector on the Node Definitions - Connectors page.

4. Define a service operation that specifies the request message, the service operation handler definition and routing definition.

The routing is a point-to-point routing where the PeopleSoft CRM node is the receiving node and the PeopleSoft HR system is the sending node.

Configuring the PeopleSoft CRM System

Perform the following tasks on the PeopleSoft CRM system:

1. Define the local integration gateway for the PeopleSoft CRM system by using the Gateways component.

Any integration gateway that you've installed and configured can serve this role, including the local gateway for the PeopleSoft Human Resources system. Specify the gateway's PeopleSoft listening connector as the gateway's URL.

2. Configure the default local node definition that represents the PeopleSoft CRM system by using the Nodes component.

This node is delivered predefined on the system.

3. Define a remote node to represent the PeopleSoft Human Resources system.

Because the PeopleSoft Human Resources system uses PeopleSoft Integration Broker, specify the local gateway for the PeopleSoft CRM system and its PeopleSoft target connector on the Node Definitions - Connectors page.

4. Define a service operation that specifies the request message, the service operation handler definition and routing definition.

The routing is a point-to-point routing where the PeopleSoft CRM node is the receiving node and the PeopleSoft HR system is the sending node.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Administering Integration Gateways” (Integration Broker Administration)

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Integrating with PeopleSoft Integration Broker Systems Through Firewalls


This section provides an overview of this scenario and discusses how to configure the system for this scenario.

Understanding This Scenario

In this scenario a PeopleSoft Human Resources system is integrating with a PeopleSoft Customer Relationship Management system on PeopleTools. Both systems are on the same PeopleTools release.

Use a remote gateway configuration when connections with an integration participant are not possible through the internet. This type of implementation enables you to communicate with wide area networks (WANs) and local area networks (LANs) where a firewall is present.

This diagram shows the configuration of PeopleSoft Integration Broker components for integrations with other PeopleSoft Integration Broker systems by using firewall.

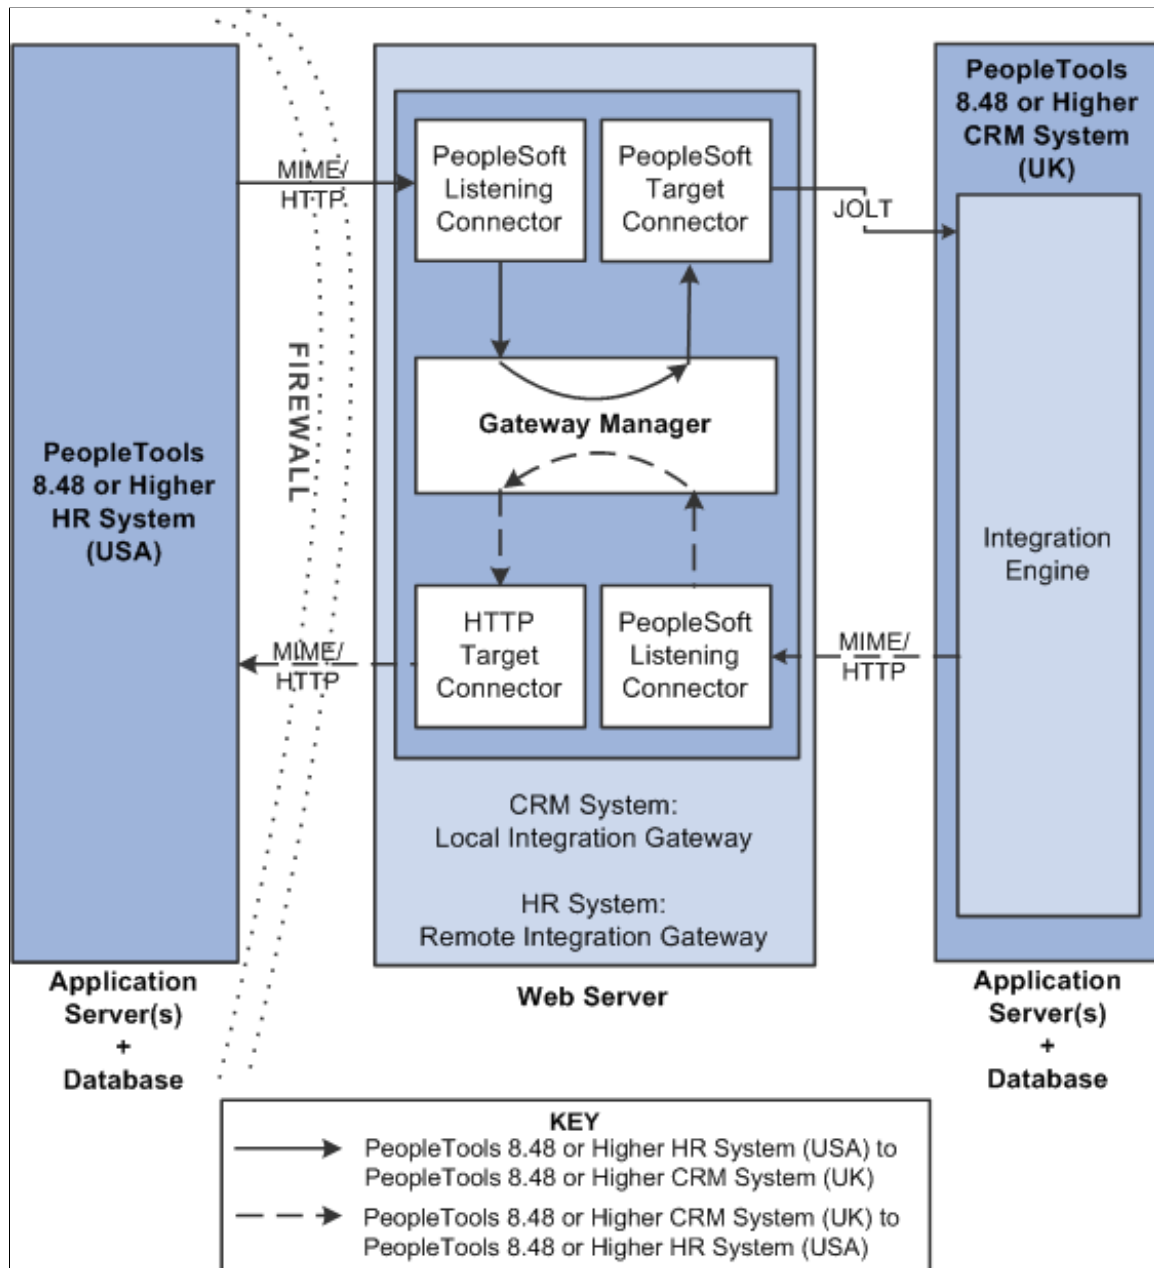

For this configuration scenario, one PeopleSoft application and one integration gateway reside on each side of the firewall. The integration gateway can reside on the same physical machine on which you have installed the PeopleSoft application, or it can reside on its own machine.

In this configuration scenario, PeopleSoft Integration Broker uses the default remote gateway connector, the HTTP target connector, on the local gateway to send messages to the PeopleSoft listening connector on the remote gateway. Routing all messages through the local gateway enables each PeopleSoft Integration Broker system to keep its own centralized log of all integration messages.

Because this example shows two-way communication and assumes that the same service operation is being exchanged, the PeopleSoft Human Resources (USA) system and the PeopleSoft CRM (UK)

system are source systems when they send messages, and they're destination systems when they receive messages.

Keep in mind the following as you review these configuration tasks:

- You should use a single integration gateway for all applications that reside on the same side of a firewall.
- The local integration gateway for one application is the remote integration gateway for the other application.

Configuring the System for This Scenario

This section describes the configuration tasks for each of the components that are shown in the previous diagram.

This section discusses how to configure:

- The PeopleSoft Human Resources (USA) system.
- The PeopleSoft Human Resources (USA) integration gateway.
- The PeopleSoft CRM (UK) system.
- The PeopleSoft CRM (UK) integration gateway.

Configuring the PeopleSoft Human Resources (USA) System

On the PeopleSoft Human Resources (USA) system:

1. Define a local integration gateway.

Use the Gateways component to define the local PeopleSoft Human Resources (USA) gateway.

2. Define a remote integration gateway.

The remote integration gateway for the PeopleSoft Human Resources (USA) system is the PeopleSoft CRM (UK) gateway. Use the Gateways component to define a new gateway, and for the gateway URL, specify the PeopleSoft listening connector of the PeopleSoft CRM (UK) gateway.

3. Define the default local node.

Use the Nodes component to define the default local node, which represents the PeopleSoft Human Resources (USA) system.

4. Define a remote node.

The remote node that you define represents the PeopleSoft CRM (UK) system. When you set up the remote node, specify the PeopleSoft CRM (remote) integration gateway and the PeopleSoft target connector on that gateway.

5. For the outbound integration, define a service operation that specifies the request and response messages, the service operation handler definition, and the outbound routing definition.

The outbound routing is a point-to-point routing where the PeopleSoft HR node is the sending node and the PeopleSoft CRM node is the receiving node.

6. For the inbound integration, on the same service operation create a routing definition where the PeopleSoft HR system is the receiving node and the PeopleSoft CRM system is the sending node.

Note: The external alias you specify on the inbound routing definition must match the external alias on the outbound routing definition you created in the previous step.

Configuring the PeopleSoft Human Resources (USA) Integration Gateway

The only required integration gateway property that you must set for the PeopleSoft Human Resources (USA) integration gateway is the Oracle Jolt connect strings that enable communication with the integration engine on the PeopleSoft Human Resources (USA) system. Set this property in the `integrationGateway.properties` file.

Configuring the PeopleSoft CRM (UK) System

On the PeopleSoft CRM (UK) system:

1. Define a local integration gateway.

Use the Gateways component to define the local PeopleSoft CRM (UK) gateway.

2. Define a remote integration gateway.

The remote integration gateway for the PeopleSoft CRM (UK) system is the PeopleSoft Human Resources (USA) gateway. Use the Gateways component to define a new gateway, and for the gateway URL, specify the PeopleSoft listening connector of the PeopleSoft Human Resources (USA) gateway.

3. Define the default local node.

Use the Nodes component to define the default local node, which represents the PeopleSoft CRM (UK) system.

4. Define a remote node.

The remote node that you define represents the PeopleSoft Human Resources (USA) system. When you set up the remote node, specify the PeopleSoft Human Resources (remote) integration gateway and the PeopleSoft target connector on that gateway.

5. For the outbound integration, define a service operation that specifies the request and response messages, the service operation handler definition, and the outbound routing definition.

The outbound routing is a point-to-point routing where the PeopleSoft HR node is the receiving node and the PeopleSoft CRM node is the sending node.

6. For the inbound integration, on the same service operation create a routing definition where the PeopleSoft HR system is the sending node and the PeopleSoft CRM system is the receiving node.

Note: The external alias you specify on the inbound routing definition must match the external alias on the outbound routing definition you created in the previous step.

Configuring the PeopleSoft CRM (UK) Integration Gateway

The only required integration gateway property that you must set for the PeopleSoft CRM (UK) integration gateway is the Oracle Jolt connect strings that enable communication with the integration engine on the PeopleSoft CRM (UK) system. Set this property in the `integrationGateway.properties` file.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Understanding Nodes” (Integration Broker Administration)

Integrating with PeopleSoft Integration Broker Systems by Using Hubs


This section provides overviews of this scenario and hub routing types and discusses how to configure:

- Generic routing hubs.
- Sender-specified routing hubs.

Understanding This Scenario

A PeopleSoft Integration Broker hub configuration includes an integration engine that houses routing rules and transformations. All integrations are routed through the hub, which enables you to centralize routing rules and offload the transformation process.

This diagram shows a one-way hub configuration scenario that involves a PeopleSoft Human Resources (HR) system and a PeopleSoft Customer Relationship Management (CRM) system.

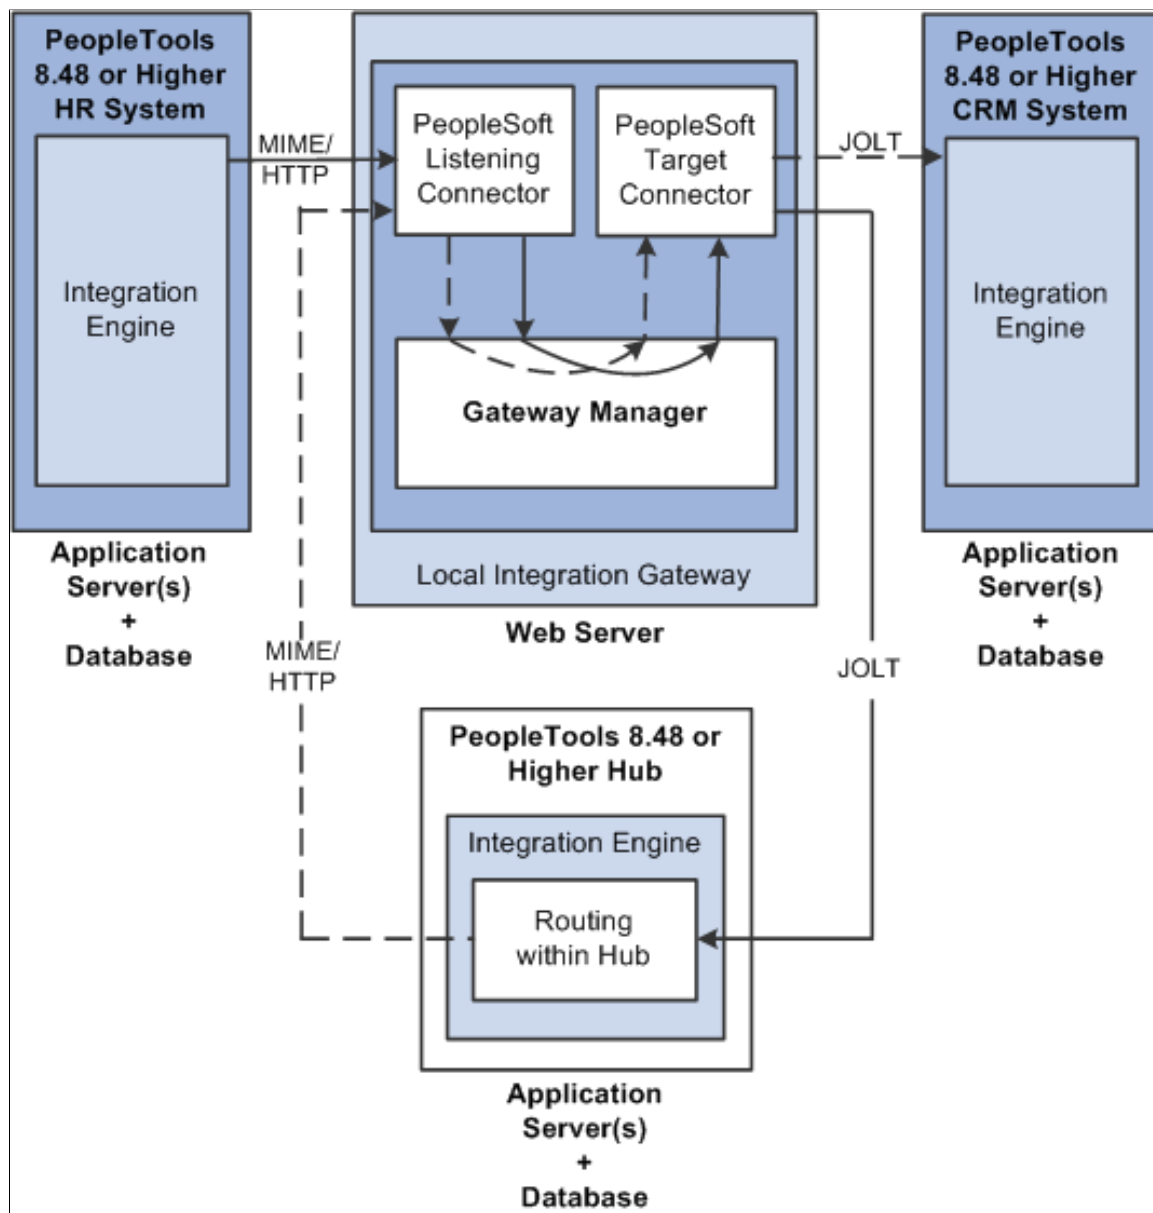

In this scenario, all of the routing rules and transformations are located on the hub.

To implement integrations between the two systems without a hub, you must set up a complete set of complementary routing rules and transformations on each node.

Understanding Hub Routing Types

There are two hub routing types: generic routing and sender-specified routing. The configuration steps for a hub vary, depending on which routing type you choose.

With generic routing, all transactions from the participating systems are sent directly to a hub for routing and transformation.

With sender-specified routing, a destination node name is passed as a parameter to a PeopleCode Publish or SyncRequest method, such as %intBrokerPublish or %intBroker.SyncRequest, to explicitly route the outbound transactions to the necessary node. Using sender-specified routing requires that you define the explicit destination nodes on the sending system. However, you can configure the system so that PeopleSoft Integration Broker passes these outbound transactions to the hub for possible rerouting and transformation.

Note: You must use sender-specific routing when you're using PublishXMLDoc to asynchronously publish an XML object.

Regardless of which hub routing you use, you must configure each PeopleSoft application's integration engine, the integration gateway, and the PeopleSoft Integration Broker hub. A PeopleSoft Integration Broker hub can be an installed PeopleSoft application, or it can have only a stand-alone PeopleTools database installed, which includes the integration engine.

Configuring Generic-Routing Hubs

By using the elements in the previous diagram as an example, this section provides an overview of how to configure a generic-routing hub. In the scenario, the PeopleSoft Human Resources system, the PeopleSoft CRM system, and the hub must all point to the same integration gateway and use the same gateway URL.

This section discusses how to configure:

- The PeopleSoft Human Resources system.
- The PeopleSoft CRM system.
- The PeopleSoft hub.
- The integration gateway.
- The generic-routing hub.

Configuring the PeopleSoft Human Resources System

On the PeopleSoft Human Resources system:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Nodes component to set up the local node, which represents the PeopleSoft Human Resources system.

3. Set up a remote node.

Use the Nodes component to set up the remote node, which represents the hub system.

4. Create a service operation.

Use the Service Operations component to set up a service operation. Define the request message, service operation handler definition, and routing definition.

Create a point-to-point routing definition where the PeopleSoft HR system is the sending node and the hub system is the receiving node.

Configuring the PeopleSoft CRM System

On the PeopleSoft CRM system:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Node Definition component to set up the local node, which represents the PeopleSoft CRM system.

3. Set up a remote node.

Use the Node Definition component to set up the remote node, which represents the hub system.

4. Create a service operation.

Use the Service Operations component to set up a service operation.

Create an inbound point-to-point routing definition where the sending node is the hub system and the receiving node is the PeopleSoft CRM system.

Configuring the PeopleSoft Hub

On the PeopleSoft hub:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Node Definition component to set up the local node, which represents the hub system.

3. Set up remote nodes.

Set up two remote nodes: one that represents the PeopleSoft Human Resources system and another that represents the PeopleSoft CRM system.

4. Create a service operation.

Use the Service Operations component to set up a service operation.

Create an outbound point-to-point routing definition where the sending node is the PeopleSoft HR system and the receiving node is the PeopleSoft CRM system.

Configuring the Integration Gateway

You must set integration gateway properties for the local gateway. The only required properties are the Oracle Jolt connect string properties that enable communication with the integration engines on the

PeopleSoft Human Resources, PeopleSoft CRM, and PeopleSoft hub systems. Set these properties in the `integrationGateway.properties` file.

Configuring the Generic-Routing Hub

For all messages going through the hub, you must set up a service operation and routing on the hub. By using the systems in the diagram as an example, the following table shows the node, service operation, and routing configurations that are required for generic routing through a hub:

<i>Item to Configure</i>	<i>PeopleSoft Human Resources System</i>	<i>Integration Broker Hub</i>	<i>PeopleSoft CRM System</i>
Local nodes	Rename the default local node to represent the PeopleSoft Human Resources system.	Rename the default local node to represent the hub.	Rename the default local node to represent the PeopleSoft CRM system.
Remote nodes	Define a remote node to represent the hub system.	Define remote nodes to represent the PeopleSoft Human Resources and CRM systems.	Define a remote node to represent the hub.
Service operations and routings.	Define outbound routing to the hub system.	Create a service operation that contains an outbound point-to-point routing definition where the sending node is the PeopleSoft HR system and the receiving node is the PeopleSoft CRM system.	Define inbound routing from the hub system.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Configuring Sender-Specified Routing Hubs

By using the systems shown in the previous diagram as an example, this section provides an overview of how to configure a sender-specific routing hub. The PeopleSoft Human Resources system is the sending system and the PeopleSoft CRM system is the receiving system. In this scenario, the sending system, the receiving system, and the hub must all point to the same gateway and use the same gateway URL.

This section discusses how to configure:

- The PeopleSoft Human Resources (sending) system.

- PeopleSoft CRM (receiving) system.
- The PeopleSoft hub.
- The integration gateway.
- The sender-specified routing hub.

Configuring PeopleSoft Human Resources (Sending) System

On the PeopleSoft Human Resources system:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Nodes component to set up the local node, which represents the PeopleSoft Human Resources system.

3. Set up remote nodes.

Set up two remote nodes: one for the receiving system (PeopleSoft CRM in the example) and one for the hub. When setting up the PeopleSoft CRM remote node, on the Nodes-Node Definitions page in the Hub Node field, enter the node name of the hub system.

4. Create a service operation.

Use the Service Operations component to create a service operation that contains an outbound point-to-point routing definition where the sending node is the PeopleSoft HR system and the receiving node is the PeopleSoft CRM system.

Configuring PeopleSoft CRM (Receiving System)

On the PeopleSoft CRM system:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Nodes component to set up the local node, which represents the PeopleSoft CRM system.

3. Set up a remote node.

Use the Nodes component to set up a node that represents the hub.

4. Create a service operation.

Use the Service Operations component to create a service operation that contains an inbound point-to-point routing definition where the sending node is the hub system and the receiving node is the PeopleSoft CRM system.

5. Create a service operation.

Use the Service Operations component to create a service operation that contains an inbound point-to-point routing definition where the sending node is the hub system and the receiving node is the PeopleSoft CRM system.

Configuring the PeopleSoft Hub

On the PeopleSoft hub:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Set up a local node.

Use the Nodes component to set up the local node, which represents the hub system.

3. Set up remote nodes.

Use the Nodes component to set up two remote nodes: one for the PeopleSoft Human Resources system and one for the PeopleSoft CRM system.

4. Create a service operation.

Use the Service Operations component to create a service operation that contains a point-to-point routing where the sending node is the PeopleSoft HR node and the receiving node is the CRM node.

Configuring the Integration Gateway

The only required integration gateway properties for the local integration gateway are the Oracle Jolt connect string properties that enable communication with the integration engines on the target PeopleSoft Integration Broker systems. Set these properties in the `integrationGateway.properties` file.

Configuring the Sender-Specified Routing Hub

For all messages going through the hub, you must set up transactions and relationships on the hub. By using the systems in the previous diagram as example, the following table shows the node, transaction, and relationship configurations that are required for sender-specified routing through a hub from the PeopleSoft Human Resources system:

<i>Item to Configure</i>	<i>PeopleSoft Human Resources System</i>	<i>PeopleSoft Integration Broker Hub</i>	<i>PeopleSoft CRM System</i>
Local nodes	Rename the default local node to represent the PeopleSoft Human Resources system.	Rename the default local node to represent the hub.	Rename the default local node to represent the PeopleSoft CRM system.
Remote nodes	Define remote nodes to represent the PeopleSoft CRM and hub systems.	Define remote nodes to represent the PeopleSoft Human Resources and CRM systems.	Define a remote node to represent the hub.

<i>Item to Configure</i>	<i>PeopleSoft Human Resources System</i>	<i>PeopleSoft Integration Broker Hub</i>	<i>PeopleSoft CRM System</i>
Service operations and routings.	Create a service operation that contains an outbound point-to-point routing definition that specifies the receiving node is the PeopleSoft CRM system.	Create a service operation that contains a point-to-point routing where the sending node is the PeopleSoft HR node and the receiving node is the CRM node.	Create a service operation that contains an inbound point-to-point routing definition where the sending node is the hub system and the receiving node is the PeopleSoft CRM system.

All messages to the PeopleSoft CRM node are the result of publish statements, which include these target node parameters:

- `msg.Publish(Node.CRM)`
- `SyncRequest(Node.CRM)`
- `%intBroker.publish(&MyDoc, Message.MyMessage, Node.CRM)`
- `%intBroker.SyncRequest(&MyDoc, Message.MyMessage, Node.CRM)`

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

[“Administering Integration Gateways” \(Integration Broker Administration\)](#)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

[“Adding Node Definitions” \(Integration Broker Administration\)](#)

[“Configuring Nodes” \(Integration Broker Administration\)](#)

Integrating with Third-Party Systems

This section provides an overview of this scenario and discusses how to configure the system for this scenario.


Understanding This Scenario

For communications with third-party systems, messages can go through local or remote gateways.

Sending a message to a third-party system is the same as sending a message to a PeopleSoft Integration Broker node, except that the target connector that you select depends on the third-party system with which you are communicating.

Messages from third-party systems can enter the gateway through any of the listening connectors that are delivered with PeopleSoft Integration Broker or through a listening connector that you build. You cannot use the PeopleSoft listening connector for integrations with third-party systems, because it can accept messages only in the PeopleSoft internal format.

This diagram shows the connectors that a PeopleSoft system can use to communicate with a third-party system and how the PeopleSoft system can communicate with third-party systems.

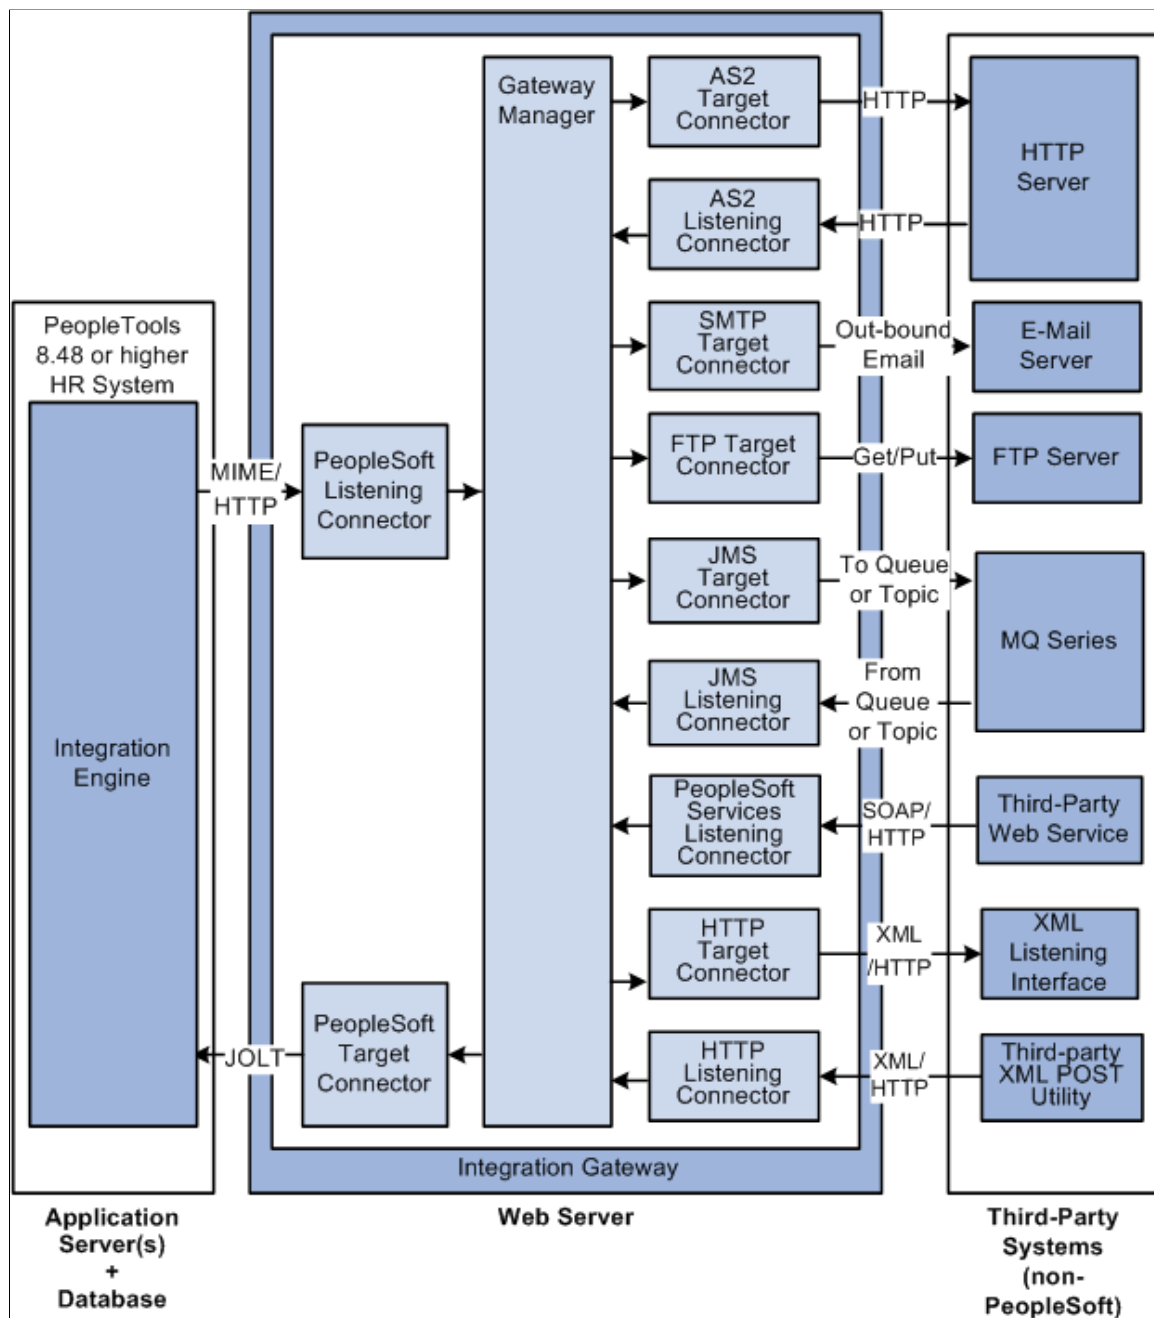

Configuring the System for This Scenario

This section discusses how to configure:

- The PeopleSoft Human Resources system.
- The PeopleSoft Human Resources integration gateway.

Configuring the PeopleSoft Human Resources System

On the PeopleSoft Human Resources system:

1. Define a local integration gateway.

Use the Gateways component to set up a local integration gateway for sending messages.

2. Create a service operation.

Use the Service Operations component to create a service operation that contains an inbound point-to-point routing definition where the sending node is the hub system and the receiving node is the PeopleSoft CRM system.

3. Set up a remote node.

Set up a remote node that represents the third-party system. When you define this node, you select the appropriate connector (for example, JMS target connector, SMTP target connector, and so forth) for communicating with the third-party system.

4. Create a service operation with an inbound routing definition where the sending node is the third-party system and the receiving node is the PeopleSoft HR system.

5. In the service operation definition you created in the previous step, create an outbound routing definition where the sending node is the PeopleSoft HR system and the receiving node is the third-party system.

Configuring the PeopleSoft Human Resources Integration Gateway

The only required integration gateway properties for the local integration gateway are the default Oracle Jolt connect string properties that enable communication with integration engines on the PeopleSoft Human Resources system. Set these properties in the `integrationGateway.properties` file.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Integrating with Third-Party Systems by Using Remote Gateways


This section provides an overview of this scenario and discusses how to:

- Send messages to third-party systems.
- Receive messages from third-party systems.

Understanding This Scenario

This diagram shows a high-level view of how to integrate with third-party systems by using remote gateways:


This diagram shows a high-level view of a PeopleSoft system integrating with a third-party system by using a remote gateway.

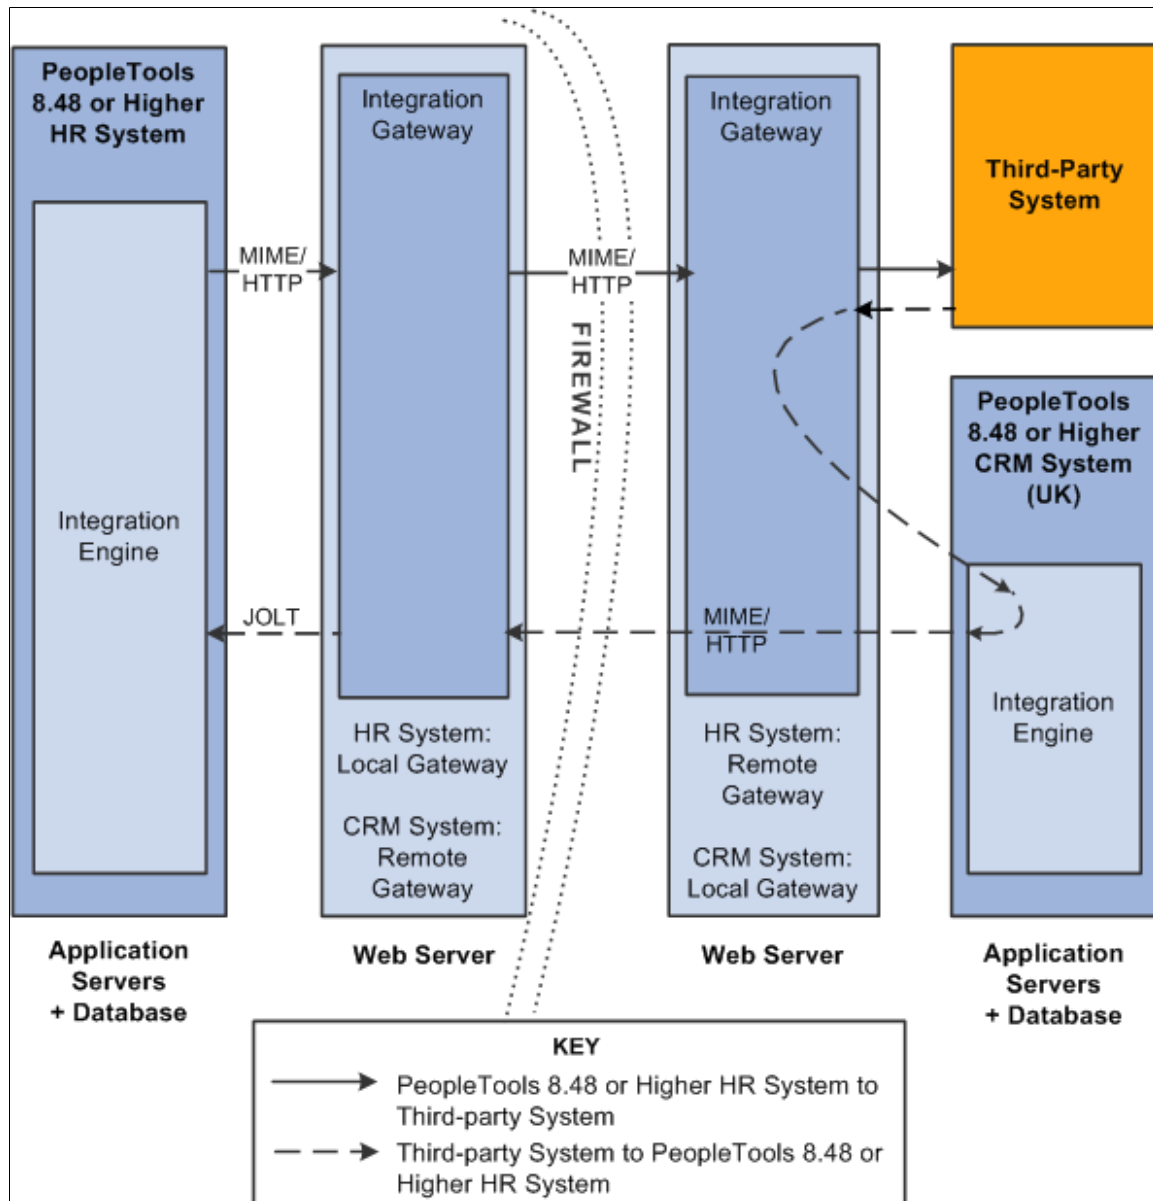

Integrations from one integration gateway to another can only be sent when they originate from a PeopleSoft system. The only exception to this is when integrations are performed through a custom connector that makes use of the IBRequest methods needed to handle this routing.


The following diagram provides a more detailed view of the configuration on the PeopleSoft system:

This diagram illustrates the configuration on the local PeopleSoft system for integrations with third-party systems using remote gateways.

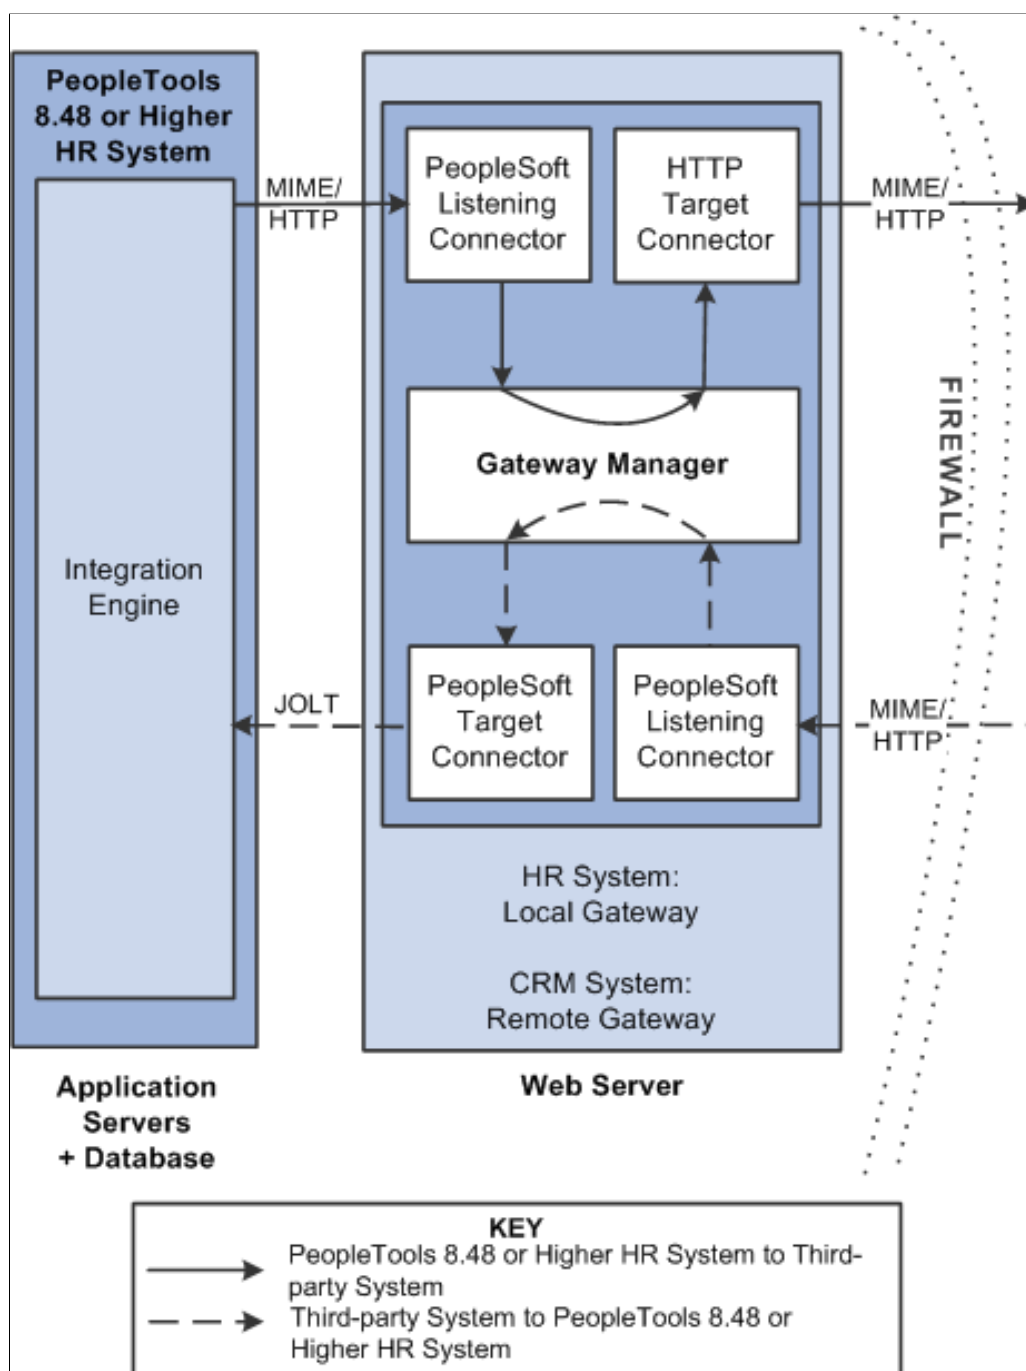

The following diagram provides a more detailed view of the configuration on the remote PeopleSoft system and the third-party system.

This diagram illustrates the configuration on the remote PeopleSoft system and on the third-party system for integrations with third-party systems using remote gateways.

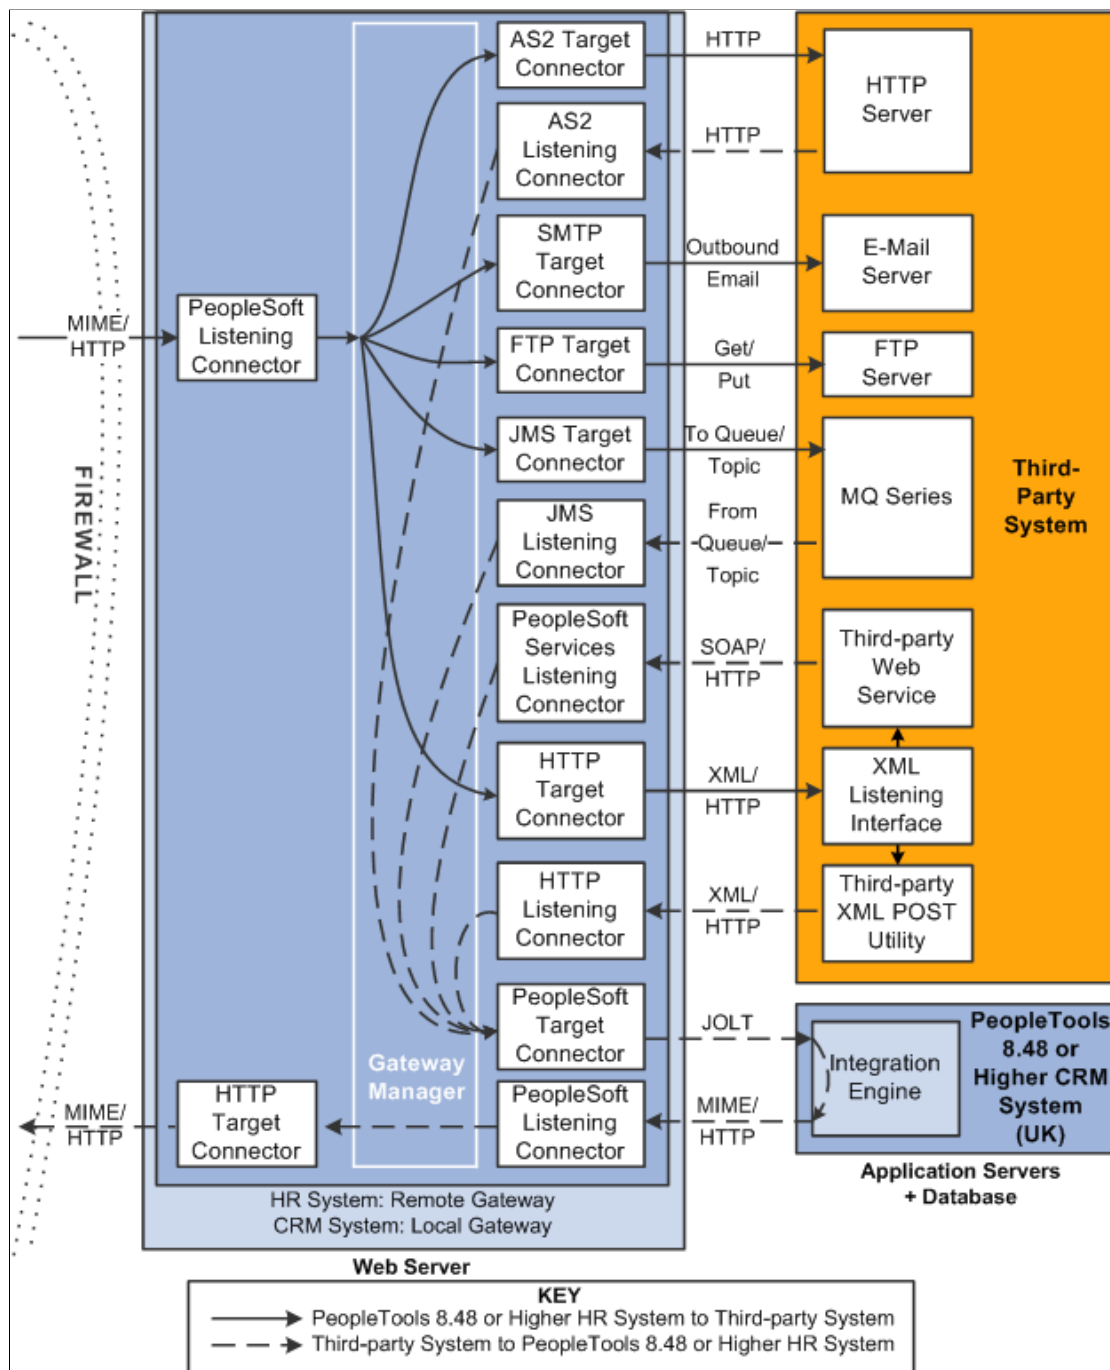

Sending Messages to Third-Party Systems

This section discusses how to configure:

- The PeopleSoft Human Resources system.
- The PeopleSoft Human Resources integration gateway.

The setup for this scenario is similar to the configuration for integrations with Integration Broker systems. The only difference is the target connector you use.

However, instead of using the PeopleSoft target connector for the remote node you must select the target connector based on the third-party system with which the PeopleSoft system is communicating. The target connector you select must reside on the remote gateway.

In the previous diagram, the PeopleSoft Human Resources system is the source system and the selected target connector is shown on the other side of the firewall, on the remote integration gateway.

As you review the configuration tasks for this scenario, keep in mind the following points:

- PeopleSoft recommends using a single gateway for all applications that reside on one side of a firewall.
- The local gateway for one PeopleSoft application can be the remote gateway for the other PeopleSoft application.

Configuring the PeopleSoft Human Resources System

On the PeopleSoft Human Resources system:

1. Define a local integration gateway.

Use the Gateways component to define the local PeopleSoft Human Resources (USA) gateway.

2. Define a remote integration gateway on the local system.

Use the Gateways component to define the gateway for the PeopleSoft Human Resources (USA) system (which is the PeopleSoft CRM [UK] gateway) and to specify the URL of the PeopleSoft CRM (UK) gateway.

3. Set up a local node.

Use the Nodes component to set up the local node, which represents the PeopleSoft Human Resources (USA) system.

4. Set up a remote node.

Use the Nodes component to set up the remote node, which represents the third-party system. When you define the remote node, use the Node Definitions-Connectors page to specify the gateway ID on the remote integration gateway. In addition, select the appropriate target connector, for example JMStarget connector, SMTP target connector, POP 3 target connector, and so forth.

5. Create a service operation that includes an outbound routing definition where the sending node is the PeopleSoft HR system and the receiving node is the third-party system.

Configuring the PeopleSoft Human Resources Integration Gateway

The only required integration gateway properties are the Oracle Jolt connect string properties that enable communication with integration engines on PeopleSoft Integration Broker systems. Set these properties in the `integrationGateway.properties` file.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

Adding Service Operation Definitions

Configuring Service Operation Definitions

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Receiving Messages from Third-Party Systems

The previous diagram shows a second configuration scenario where a third-party system is performing an inbound HTTP Post to a PeopleSoft Human Resources/USA system via a UK gateway. In this scenario, the message goes through the PeopleSoft CRM/UK system only to get routing information, before it is sent to the remote integration gateway (the gateway on the USA side of the firewall. Therefore, in this scenario, the PeopleSoft CRM/UK system serves as a hub.

This section discusses how to configure:

- The PeopleSoft Human Resources (USA) system.
- The PeopleSoft Human Resources integration gateway.
- The PeopleSoft CRM (UK) system and hub.
- The PeopleSoft CRM (UK) integration gateway.
- The third-party system and PeopleSoft system.

Message Flow

In this scenario, a message originating from a third-party system is posted to the HTTP listening connector, JMS listening connector or a custom-built listening connector on the PeopleSoft CRM/UK integration gateway. Since the message does not contain the required routing information for the remote gateway, the listening connector hands it off to the PeopleSoft target connector. The PeopleSoft target connector sends the message to the default PeopleSoft node (the PeopleSoft CRM/UK) as determined by the default Jolt settings in the `integrationGateway.properties` file.

When the message reaches Integration Broker on the PeopleSoft CRM/UK system, the system applies transaction information to reroute the message to the remote gateway (the gateway on the USA side of the firewall), and thereby serves as a hub.

Message Processing on the Remote Gateway

Whenever you publish a message bound for a remote gateway, PeopleSoft Integration Broker reads it, determines that the target connector is not on its local gateway, places the remote gateway URL inside the `IBInfo` message wrapper and posts it to the PeopleSoft listening connector on the local gateway. The local gateway manager finds a remote gateway URL in the message wrapper and routes it to the remote gateway default connector, the HTTP target connector. The HTTP target connector on the local gateway then posts the message to the remote gateway URL (the PeopleSoft listening connector on the remote gateway) in MIME format, and removes the URL from the `IBInfo` message wrapper. On arrival at the remote gateway, the message is processed like any other incoming PeopleSoft message.

An exception to this message flow is if on the UK integration gateway side you created and loaded a custom listening connector that allows for the required routing information to be populated in the `IBInfo` message wrapper. The message would no longer need to be sent via the hub.

Keep in mind the following points:

- PeopleSoft recommends that you use a single gateway for all applications that reside on one side of a firewall.
- The local gateway for one PeopleSoft application can be a remote gateway for another PeopleSoft application.
- A message coming from a third-party system (local gateway or remote gateway) system can enter the integration gateway from any of the delivered listening connectors or from a custom-built listening connector. It cannot, however, use the PeopleSoft listening connector. PeopleSoft has designed the PeopleSoft listening connector to accept messages in the PeopleSoft internal message format only. Note that the diagram shows the message entering the integration gateway via the HTTP listening connector.

Configuring the PeopleSoft Human Resources (USA) System

On the PeopleSoft Human Resources system:

1. Set up a local node.

Use the Node Definition component to set up the local node, which represents the Human Resources system.

2. Set up a remote node.

The remote node that you set up represents the PeopleSoft CRM system. When you set up the remote node, specify the PeopleSoft target connector.

3. Create a service operation that contains an outbound routing definition where the sending node is the PeopleSoft CRM system and the receiving node is the PeopleSoft HR system.

Configuring the PeopleSoft Human Resources Integration Gateway

The only required integration gateway properties are the Oracle Jolt connect string properties that enable communication with the PeopleSoft Human Resources system. Set these properties in the `integrationGateway.properties` file.

Configuring the PeopleSoft CRM (UK) System and Hub

On the PeopleSoft CRM (UK) system:

- Define a local integration gateway.

Use the Gateways component to set up the local gateway for the sending system.

- Define a remote integration gateway.

The remote gateway for the PeopleSoft CRM (UK) system is the PeopleSoft Human Resources (USA) gateway.

- Set up a local node.

Use the Node Definition component to set up the local node, which represents the PeopleSoft CRM system.

- Set up remote nodes.

Use the Node Definition component to define two remote nodes: one remote node that represents the third-party system and another to represent the PeopleSoft Human Resources (USA) system. When you define the remote node that represents the third-party system, you specify the HTTP target connector, HTTPTARGET. When you define the remote node that represents the PeopleSoft Human Resources (USA) system, set it to use the PeopleSoft target connector on the remote (USA) gateway.

- Create a service operation that contains an outbound routing definition where the sending node is the third-party system and the receiving node is the PeopleSoft HR system.
- In the service operation definition that you created in the previous step, create an inbound routing definition if the third-party system will be sending you requests.

Configuring the PeopleSoft CRM (UK) Integration Gateway

The only required properties are the Oracle Jolt connect string properties that enable communication with integration engines on the PeopleSoft CRM systems. Set these properties in the integrationGateway.properties file.

Configuring the Third-Party System and PeopleSoft System

Because the PeopleSoft CRM (UK) system serves as a hub in this scenario, you must set up transactions and relationships for all messages from the third-party system that are routed through it. By using the systems in the diagram as an example, the following table shows the required node, transaction and relationship configurations:

<i>Item to Configure</i>	<i>PeopleSoft Human Resources System</i>	<i>PeopleSoft CRM System (Hub)</i>
Local nodes	Rename the default local node to represent the PeopleSoft Human Resources system.	Rename the default local node to represent the PeopleSoft CRM system.
Remote nodes	Define a remote node to represent the PeopleSoft CRM system.	Define remote nodes to represent the third-party system and the PeopleSoft Human Resources system.
Service operations and routing definitions	Define a service operation with an inbound routing definition where the PeopleSoft CRM system is the sending node and the PeopleSoft HR system is the receiving node.	Define a service operation with an outbound routing definition where the sending node is the third-party system and the receiving node is the PeopleSoft HR system.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)


Integrating with PeopleTools 8.47 and Earlier PeopleTools 8.4x Systems

This section provides an overview of this scenario and discusses how to configure the system for this scenario.

Understanding This Scenario

This diagram shows the PeopleSoft Integration Broker components and configuration for communications between a PeopleSoft Integration Broker system and a PeopleSoft system running on PeopleTools 8.47:

This example illustrates the PeopleSoft Integration Broker components and configuration for communications between a PeopleSoft Integration Broker system on PeopleTools 8.48 or later release and a PeopleSoft system running on PeopleTools 8.47.

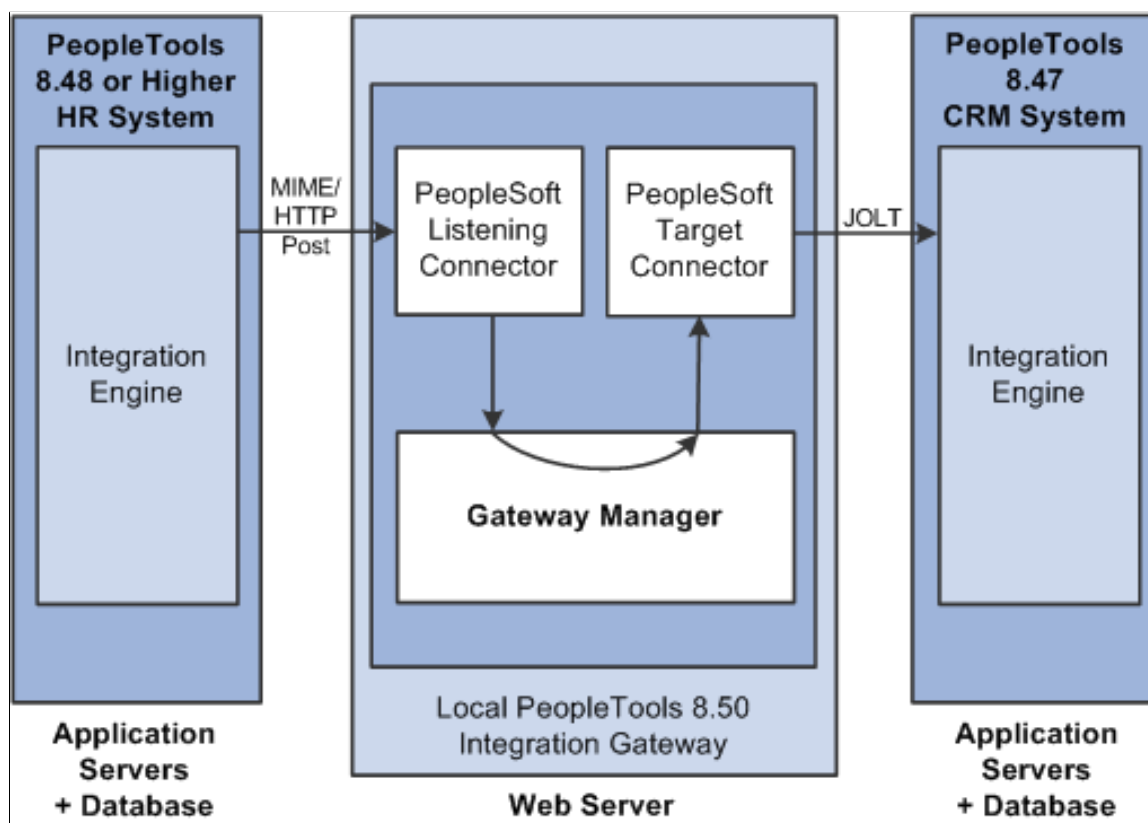

While this diagram depicts a PeopleSoft 8.47 system, the information provided in this section applies to any PeopleTools 8.47 or earlier system.

In this example, the PeopleSoft Human Resources is the sending system and the PeopleSoft CRM system is the receiving system.

The remainder of this section highlights the integration tasks by using the systems and components shown in the diagram as examples.

Configuring the System for This Scenario

This section discusses how to configure:

- The PeopleSoft Human Resources system.
- The PeopleSoft CRM system.

Configuring the PeopleSoft Human Resources System

In this scenario, the PeopleSoft Human Resource system is running on PeopleTools 8.55.

On the PeopleSoft Human Resources system:

- Define a local integration gateway.

Use the Gateways component to set up a local gateway for the PeopleSoft Human Resources system.

The only required properties are the Oracle Jolt connect string properties that enable communication with the PeopleSoft Human Resources systems. Set these properties in the `integrationGateway.properties` file

- Set up a local node.

Use the Node Definition component to set up the local node, which represents the PeopleSoft 8.55 Human Resources system.

- Set up a remote node.

The remote node that you set up represents the PeopleSoft 8.47 or earlier Human Resources system. When you set up the remote node, specify the PeopleSoft target connector (PSFTTARGET) on the Connectors tab.

Note: If you have upgraded from a PeopleSoft system, all nodes that existed for the system have been preserved as remote nodes in the PeopleSoft Integration Broker system. However, you must then associate each of these nodes to the PeopleSoft target connector for the remote node.

- Create a service operation with an inbound routing definition.

Use the Service Operations component to create a service operation that contains an inbound routing definition where the receiving node is the PeopleSoft 8.55 system and the sending node is the PeopleSoft 8.47 or earlier system.

- Set up an outbound routing definition.

In the service operation definition that you created in the previous step, create an outbound routing definition where the sending node is the PeopleSoft 8.55 system and the receiving node is the 8.47 or earlier system.

Configuring the PeopleSoft 8.47 or Earlier Human Resources System

In this scenario, the PeopleSoft CRM system is running on PeopleTools 8.47.

On the PeopleSoft CRM system:

1. Define the local integration gateway for the PeopleSoft CRM system by using the Gateways component. Specify the gateway's PeopleSoft listening connector as the gateway's URL.
2. Set up a local node.

Use the Node Definition component to set up the local node, which represents the PeopleSoft CRM system.

3. Set up a remote node.

The remote node that you set up represents the PeopleSoft 8.55 system. When you set up the remote node, specify the PeopleSoft target connector (PSFTTARGET) on the Connectors tab.

Because the PeopleSoft Human Resources system uses PeopleSoft Integration Broker, specify the local gateway for the PeopleSoft CRM system and its PeopleSoft target connector on the Node Definitions - Connectors page.


Integrating with PeopleTools 8.1x Systems

This section provides an overview of this scenario and discusses how to configure the system for this scenario.

Understanding This Scenario

This diagram shows the PeopleSoft Integration Broker components and configuration for communications between PeopleSoft Integration Broker systems and PeopleSoft systems running on PeopleTools 8.1x:

This example illustrates the PeopleSoft Integration Broker components and configuration for communications between PeopleSoft Integration Broker systems on PeopleTools 8.48 and later systems and PeopleSoft systems running PeopleTools 8.1x.

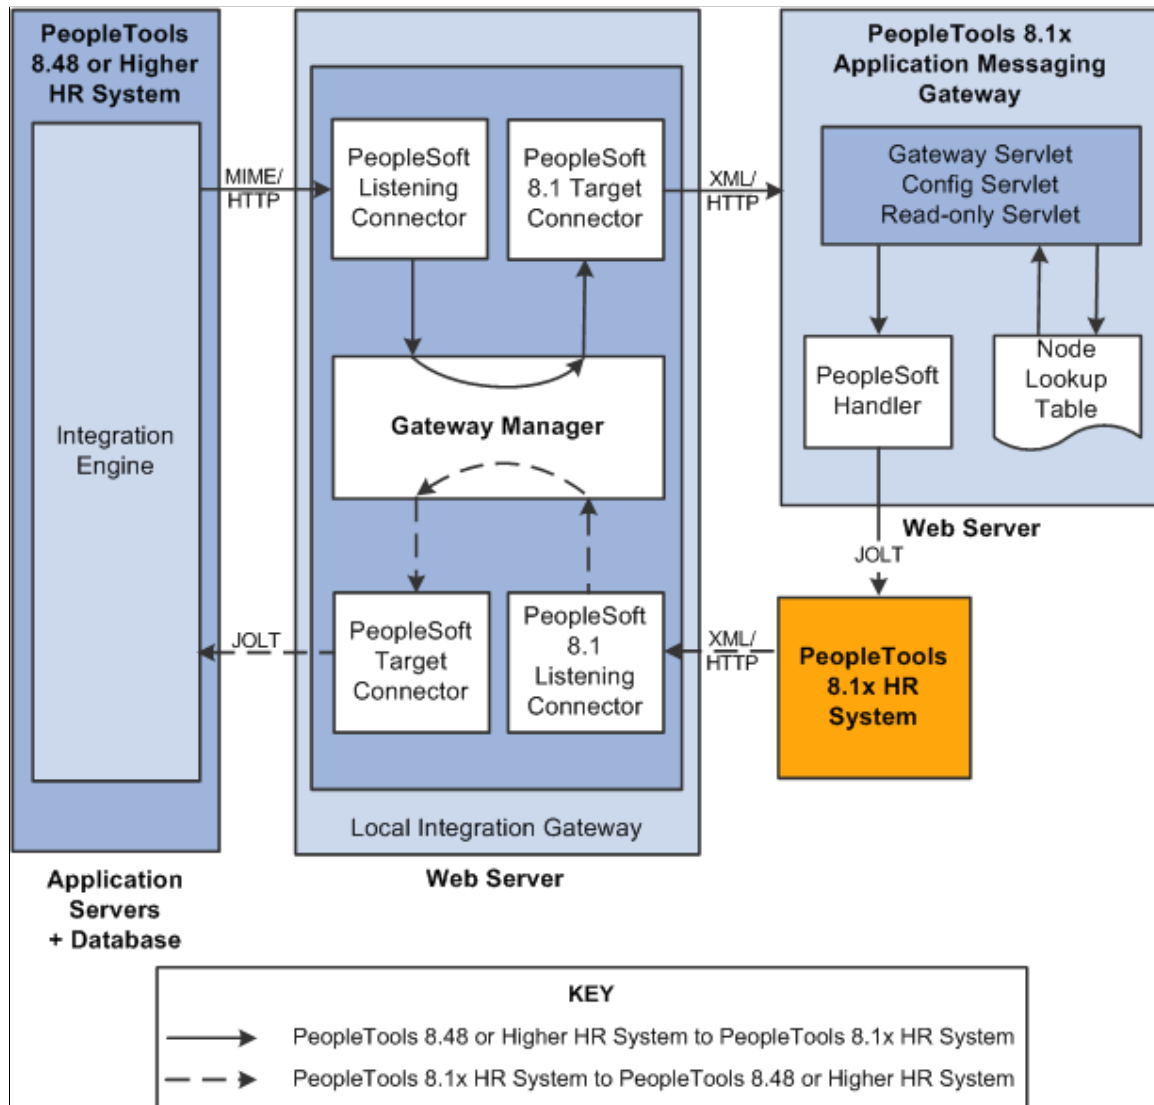

In this scenario, you must configure the PeopleSoft Integration Broker system, the integration gateway, and the PeopleTools 8.1x system. The remainder of this section highlights these tasks by using the systems and components shown in the diagram as examples.

Configuring the System for This Scenario

This section discusses how to configure:

- The PeopleSoft Human Resources system.
- The PeopleSoft Human Resources integration gateway.
- The PeopleTools 8.1x Human Resources system.

Configuring the PeopleSoft Human Resources System

On the PeopleSoft Human Resources system:

- Define a local integration gateway.

Use the Gateways component to set up a local gateway for the PeopleSoft Human Resources system.

- Set up a local node.

Use the Node Definition component to set up the local node, which represents the PeopleSoft Human Resources system.

- Set up a remote node.

The remote node that you set up represents the PeopleSoft 8.1x Human Resources system. When you set up the remote node, specify the PeopleSoft 8.1 target connector (PSFT81TARGET) on the Connectors tab.

Note: If you have upgraded from a PeopleSoft 8.1x system, all nodes that existed for the system have been preserved as remote nodes in the PeopleSoft Integration Broker system. However, you must then associate each of these nodes to the PeopleSoft 8.1 target connector.

- Create a service operation with an inbound routing definition.

Use the Service Operations component to create a service operation that contains an inbound routing definition where the receiving node is the PeopleSoft 8.55 system and the sending node is the PeopleSoft 8.1x system.

- Set up an outbound routing definition.

In the service operation definition that you created in the previous step, create an outbound routing definition where the sending node is the PeopleSoft 8.55 system and the receiving node is the 8.1x system.

Configuring the PeopleSoft Human Resources Integration Gateway

You must set integration gateway properties for the local gateway. The only required properties are the Oracle Jolt connect string properties that enable communication with the PeopleSoft Human Resources systems. Set these properties in the integrationGateway.properties file.

Configuring the PeopleSoft 8.1x Human Resources System

On the PeopleSoft 8.1x Human Resources system, locate the PeopleSoft 8.1x Human Resources message node and change the URL (location) to the PeopleSoft listening connector. The format is `http://webserver/PSIGW.war/PS81ListeningConnector`.

Related Links

[Understanding Integration Setup for the Integration Scenarios](#)

“Administering Integration Gateways” (Integration Broker Administration)

[Adding Service Operation Definitions](#)

[Configuring Service Operation Definitions](#)

“Adding Node Definitions” (Integration Broker Administration)

“Configuring Nodes” (Integration Broker Administration)

Transformation Example: Integration Between Two PeopleSoft Nodes

Understanding the Transformation Example

This topic presents an in-depth example of how to use transformations to alter the messages sent between two systems.

Note: The code examples in this topic are for illustrative purposes only and are not intended to be used in a production environment.

Using the Example

The purpose of this topic is to present a more in depth example of how transformations can be used to alter the messages sent between two systems.

The following example describes an integration between a PeopleSoft Supply Chain Management node (PeopleSoft SCM) and a PeopleSoft Customer Relationship Management node (PeopleSoft CRM). This example demonstrates taking a PeopleSoft SCM purchase order message and transforming it into a similar PeopleSoft CRM purchase order message format.

Two aspects of transformations will be examined in this example:

- How XSL can be used to modify the structure of a message.
- How codesets can be used to map values between messages.

The example will focus on the PeopleSoft SCM system. This is the node where the XSL will be executed to transform the message from the SCM specified format to that of CRM. When the SCM system sends the message to CRM, the message will be in the CRM native format.

Integration Metadata for This Example

The example does not go into detail about setting up the all infrastructure necessary to actually send messages between the two nodes. It assumes that the systems have been configured and the service operations and services have been defined. Please refer to the topics elsewhere in the product documentation for setting up integration metadata.

Related Links

[PeopleSoft Integration Broker Metadata](#)

Creating Message Definitions


This section discusses the structure of the message definitions used in this example.

Message Definition: PeopleSoft SCM Node

The structure of a message appears on the Messages – Message Definitions page. To access the page select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.

The following example shows the format of the purchase order on the PeopleSoft SCM node.

This example illustrates a partial view of the Messages – Message Definition page. The example shows the message structure for the purchase order message PURCHASEORDERMSG on the SCM node.

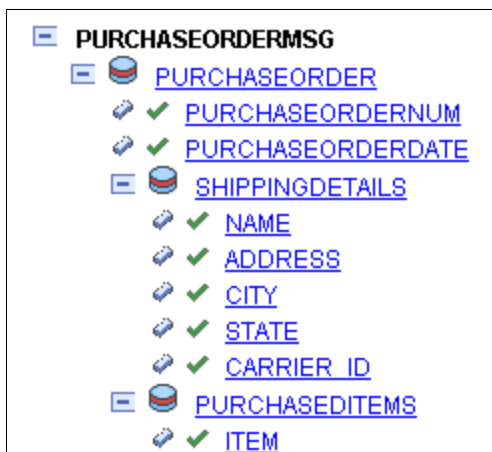

The following is a sample message that corresponds to the message structure:

```

<?xml version="1.0"?>
<PURCHASEORDERMSG>
  <FieldTypes>
    <PURCHASEORDER class="R">
      <PURCHASEORDERNUM type="CHAR"/>
      <PURCHASEORDERDATE type="DATE"/>
    </PURCHASEORDER>
    <SHIPPINGDETAILS class="R">
      <NAME type="CHAR"/>
      <ADDRESS type="CHAR"/>
      <CITY type="CHAR"/>
      <STATE type="CHAR"/>
      <CARRIER_ID type="CHAR"/>
    </SHIPPINGDETAILS>
    <PURCHASEDITEMS class="R">
      <ITEM type="CHAR"/>
    </PURCHASEDITEMS>
    <PSCAMA class="R">
      <LANGUAGE_CD type="CHAR"/>
      <AUDIT_ACTN type="CHAR"/>
      <BASE_LANGUAGE_CD type="CHAR"/>
      <MSG_SEQ_FLG type="CHAR"/>
      <PROCESS_INSTANCE type="NUMBER"/>
      <PUBLISH_RULE_ID type="CHAR"/>
      <MSGNODENAME type="CHAR"/>
    </PSCAMA>
  </FieldTypes>
  <MsgData>
    <Transaction>

```

```

<PURCHASEORDER class="R">
  <PURCHASEORDERNUM IsChanged="Y">19908</PURCHASEORDERNUM>
  <PURCHASEORDERDATE IsChanged="Y">2006-04-03</PURCHASEORDERDATE>
  <SHIPPINGDETAILS class="R">
    <NAME IsChanged="Y">Smith,Bill</NAME>
    <ADDRESS IsChanged="Y">123 Anywhere St</ADDRESS>
    <CITY IsChanged="Y">Fresno</CITY>
    <STATE IsChanged="Y">CA</STATE>
    <CARRIER_ID IsChanged="Y">USPS</CARRIER_ID>
  </SHIPPINGDETAILS>
  <PURCHASEDITEMS class="R">
    <ITEM IsChanged="Y">AAS5536</ITEM>
  </PURCHASEDITEMS>
  <PURCHASEDITEMS class="R">
    <ITEM IsChanged="Y">POB332Q</ITEM>
  </PURCHASEDITEMS>
</PURCHASEORDER>
<PSCAMA class="R">
  <LANGUAGE_CD>ENG</LANGUAGE_CD>
  <AUDIT_ACTN/>
  <BASE_LANGUAGE_CD>ENG</BASE_LANGUAGE_CD>
  <MSG_SEQ_FLG/>
  <PROCESS_INSTANCE>0</PROCESS_INSTANCE>
  <PUBLISH_RULE_ID/>
  <MSGNODENAME/>
</PSCAMA>
</Transaction>
</MsgData>
</PURCHASEORDERMSG>


```

Message Definition: PeopleSoft CRM Node

The structure of a message appears on the Messages – Message Definitions page. To access the page select **PeopleTools > Integration Broker > Integration Setup > Message Definitions**.

The following example shows the format of the purchase order on the PeopleSoft CRM node.

This example illustrates a partial view of the Messages – Message Definition page. The example shows the message structure for the purchase order message PO_MSG on the CRM node.

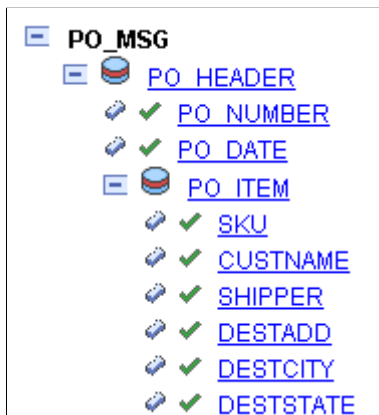

This is a sample message that corresponds to the message structure:

```

<?xml version="1.0"?>
<PO_MSG>
  <FieldTypes>
    <PO_HEADER class="R">
      <PO_NUMBER type="CHAR"/>
      <PO_DATE type="DATE"/>
    </PO_HEADER>

```

```

<PO_ITEM class="R">
  <SKU type="CHAR"/>
  <CUSTNAME type="CHAR"/>
  <SHIPPER type="CHAR"/>
  <DESTADD type="CHAR"/>
  <DESTCITY type="CHAR"/>
  <DESTSTATE type="CHAR"/>
</PO_ITEM>
<PSCAMA class="R">
  <LANGUAGE_CD type="CHAR"/>
  <AUDIT_ACTN type="CHAR"/>
  <BASE_LANGUAGE_CD type="CHAR"/>
  <MSG_SEQ_FLG type="CHAR"/>
  <PROCESS_INSTANCE type="NUMBER"/>
  <PUBLISH_RULE_ID type="CHAR"/>
  <MSGNODENAME type="CHAR"/>
</PSCAMA>
</FieldTypes>
<MsgData>
  <Transaction>
    <PO_HEADER class="R">
      <PO_NUMBER IsChanged="Y">BBN7782</PO_NUMBER>
      <PO_DATE IsChanged="Y">2006-04-15</PO_DATE>
      <PO_ITEM class="R">
        <SKU IsChanged="Y">JN557BB</SKU>
        <CUSTNAME IsChanged="Y">Jones,Mark</CUSTNAME>
        <SHIPPER IsChanged="Y">Federal Express</SHIPPER>
        <DESTADD IsChanged="Y">66 Availer St</DESTADD>
        <DESTCITY IsChanged="Y">Stockton</DESTCITY>
        <DESTSTATE IsChanged="Y">CA</DESTSTATE>
      </PO_ITEM>
    </PO_HEADER>
    <PSCAMA class="R">
      <LANGUAGE_CD>ENG</LANGUAGE_CD>
      <AUDIT_ACTN/>
      <BASE_LANGUAGE_CD>ENG</BASE_LANGUAGE_CD>
      <MSG_SEQ_FLG/>
      <PROCESS_INSTANCE>0</PROCESS_INSTANCE>
      <PUBLISH_RULE_ID/>
      <MSGNODENAME/>
    </PSCAMA>
  </Transaction>
</MsgData>
</PO_MSG>

```

Setting Up the Codesets

Both the PeopleSoft SCM and PeopleSoft CRM messages contain an entry to capture the shipping agent to be used for the purchase order. For the PeopleSoft SCM message, the element used is `CARRIER_ID`; for the PeopleSoft CRM message it is `SHIPPER`. For the purposes of this example, the assumption is that the values for these two elements map differently, according to the following table:

<i>CARRIER_ID values on SCM System</i>	<i>SHIPPER Values on CRM System</i>
FEDEX	Federal Express
UPS	United Parcel Service
USPS	United States Postal Service

An SCM message containing the following XML:

```
<CARRIER_ID>UPS</CARRIER_ID>
```

would logically map to:

```
<SHIPPER>United Parcel Service</SHIPPER>
```

in the corresponding CRM message.

In order to enable such mapping in this example, you must create codeset metadata.

Create codeset metadata:

1. Create a codeset group called *SCM_GROUP*. Add the following entries:

Match Name	Match Value
CARRIER_ID	FEDEX
CARRIER_ID	UPS
CARRIER_ID	USPS
CARRIER_ID	Blank

Note that the final match value entry is blank: this will be used for the default value.

2. Create a codeset called *SCM_CODESET*, using the codeset group defined in the prior step. Add the following entries to this codeset:

Match Name	Match Value
CARRIER_ID	FEDEX
CARRIER_ID	UPS
CARRIER_ID	USPS
CARRIER_ID	Blank

3. Create a codeset group called *CRM_GROUP*. There is no need to define any entries for this group.
4. Add codeset values from the *SCM_GROUP* to the *CRM_GROUP*, using the *SCM_CODESET*. Four entries will need to be defined:
 - Select *CARRIER_ID* and *<blank>*, and add a return name of *SHIPPER* and the value *Unknown*.
 - Select *CARRIER_ID* and *FEDEX*, and add a return name of *SHIPPER* and the value *Federal Express*.

- Select *CARRIER_ID* and *UPS*, and add a return name of *SHIPPER* and the value *United Parcel Service*.
 - Select *CARRIER_ID* and *USPS*, and add a return name of *SHIPPER* and the value *United States Postal Service*.
5. Go to the node definition for the SCM node and add the codeset group *SCM_CODESET* to the node.
 6. Go to the node definition for the CRM node and add the codeset group *CRM_CODESET* to the node.

Setting Up the Transformation

The PeopleSoft SCM and PeopleSoft CRM purchase order messages share what are essentially the same first two elements: a purchase order number and the purchase order date. However, from there the structures differ. The PeopleSoft SCM message has a small section containing shipping information, followed by the list of items purchased. The PeopleSoft CRM message has the shipping information merged with the list of items purchased.

The following XSL transforms the PeopleSoft SCM purchase order message into the PeopleSoft CRM format:

```
<?xml version="1.0"?>

<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
version="1.0">

  <xsl:template match="PURCHASEORDERMSG">
    <PO_MSG>
      <xsl:apply-templates select="FieldTypes"/>
      <xsl:apply-templates select="MsgData"/>
    </PO_MSG>
  </xsl:template>

  <xsl:template match="MsgData">
    <MsgData>
      <xsl:apply-templates select="Transaction"/>
    </MsgData>
  </xsl:template>

  <xsl:template match="Transaction">
    <Transaction>
      <xsl:apply-templates select="PURCHASEORDER"/>
      <PSCAMA class="R">
        <LANGUAGE_CD>ENG</LANGUAGE_CD>
        <AUDIT_ACTN/>
        <BASE_LANGUAGE_CD>ENG</BASE_LANGUAGE_CD>
        <MSG_SEQ_FLG/>
        <PROCESS_INSTANCE>0</PROCESS_INSTANCE>
        <PUBLISH_RULE_ID/>
        <MSGNODENAME/>
      </PSCAMA>
    </Transaction>
  </xsl:template>

  <xsl:template match="PURCHASEORDER">
    <PO_HEADER class="R">
      <PO_NUMBER IsChanged="Y"><xsl:value-of select="PURCHASEORDERNUM"/>
    </PO_NUMBER>
    <PO_DATE IsChanged="Y"><xsl:value-of select="PURCHASEORDERDATE"/>
```

```

        </PO_DATE>
        <xsl:apply-templates select="PURCHASEDITEMS"/>
    </PO_HEADER>
</xsl:template>

<xsl:template match="PURCHASEDITEMS">
    <PO_ITEM class="R">
        <SKU IsChanged="Y"><xsl:value-of select="ITEM"/></SKU>
        <CUSTNAME IsChanged="Y">
            <xsl:value-of select="../SHIPPINGDETAILS/NAME"/>
        </CUSTNAME>
        <SHIPPER IsChanged="Y">
            <psft_function name="codeset" codesetname="SCM_CODESET">
                <parm name="CARRIER_ID">
                    <xsl:value-of select="../SHIPPINGDETAILS/CARRIER_ID"/>
                </parm>
                <value name="SHIPPER" select="."/>
            </psft_function>
        </SHIPPER>
        <DESTADD IsChanged="Y">
            <xsl:value-of select="../SHIPPINGDETAILS/ADDRESS"/>
        </DESTADD>
        <DESTCITY IsChanged="Y">
            <xsl:value-of select="../SHIPPINGDETAILS/CITY"/>
        </DESTCITY>
        <DESTSTATE IsChanged="Y">
            <xsl:value-of select="../SHIPPINGDETAILS/STATE"/>
        </DESTSTATE>
    </PO_ITEM>
</xsl:template>

<xsl:template match="FieldTypes">
<FieldTypes>
    <PO_HEADER class="R">
        <PO_NUMBER type="CHAR"/>
        <PO_DATE type="DATE"/>
    </PO_HEADER>
    <PO_ITEM class="R">
        <SKU type="CHAR"/>
        <CUSTNAME type="CHAR"/>
        <SHIPPER type="CHAR"/>
        <DESTADD type="CHAR"/>
        <DESTCITY type="CHAR"/>
        <DESTSTATE type="CHAR"/>
    </PO_ITEM>
    <PSCAMA class="R">
        <LANGUAGE_CD type="CHAR"/>
        <AUDIT_ACTN type="CHAR"/>
        <BASE_LANGUAGE_CD type="CHAR"/>
        <MSG_SEQ_FLG type="CHAR"/>
        <PROCESS_INSTANCE type="NUMBER"/>
        <PUBLISH_RULE_ID type="CHAR"/>
        <MSGNODENAME type="CHAR"/>
    </PSCAMA>
</FieldTypes>
</xsl:template>
</xsl:stylesheet>

```

Note that this XSL contains a reference to the `psft_function`, which will resolve codeset mapping after the transform has been run.

This XSL should be placed into an Application Engine program, and this program associated with the routing definitions for the service operation.

XSL Walkthrough

This section discusses the process flow through the XSL when the PeopleSoft SCM purchase order message is transformed.

XSL is composed of templates. An XSLT template is an instruction of what to do when a particular XML node or condition is encountered. During a transform, the XSL processing engine starts at the root element of the XML message and then attempts to find matching templates in the XSL. When a matching template is found, the instructions in that template are used in the building of the output XML document.

The processing of a transform is actually a two pass process. In the first pass, the XSL is executed against the input XML, and an output XML document is generated. In the second pass, the `psft_function` calls are resolved and the codeset values are placed into the document.

Transformation Processing: First Pass

This section discusses the first pass of transform processing, during which the XSL code runs against the input XML and the system generates an output XML document. The steps listed below mimic the actions taken by the transformation engine in processing the input XML.

1. The first element in the input message is *PURCHASEORDERMESSAGE*. The transformation engine finds the following matching template in the XSL:

```
<xsl:template match="PURCHASEORDERMSG">
  <PO_MSG>
    <xsl:apply-templates select="FieldTypes"/>
    <xsl:apply-templates select="MsgData"/>
  </PO_MSG>
</xsl:template>
```

Here we see the root element of the output document being created. This template instructs the transformation engine to:

- Output the start tag for *PO_MSG*.

It is important to note that template processing is a recursive process. In the sequence above, the transformation engine outputs the start tag, then applies templates to all *FieldTypes* nodes. This is essentially a callout to the template that handles those nodes (and potentially any children). The output of this call is then placed into the output document. Then the transformation engine selects all the *MsgData* nodes, and applies templates to them. Again, the output from the processing of those nodes is then placed into the output document. Finally, the closing *PO_MSG* tag is written into the output, and the first pass is finished. Of course, documenting a recursive process is not always straightforward. In this example bear in mind that while it is presented as a numbered sequence of steps, the actual process is not sequential.

- Select the *FieldTypes* nodes under the current node in the input document, and process them.
- Select the *MsgData* nodes under the current node in the input document, and process them.
- Output the end tag for *PO_MSG*.

2. The transform engine selects the *FieldTypes* node, and finds the following template:

```
<xsl:template match="FieldTypes">
```

```

<FieldTypes>
  <PO_HEADER class="R">
    <PO_NUMBER type="CHAR"/>
    <PO_DATE type="DATE"/>
  </PO_HEADER>
  <PO_ITEM class="R">
    <SKU type="CHAR"/>
    <CUSTNAME type="CHAR"/>
    <SHIPPER type="CHAR"/>
    <DESTADD type="CHAR"/>
    <DESTCITY type="CHAR"/>
    <DESTSTATE type="CHAR"/>
  </PO_ITEM>
  <PSCAMA class="R">
    <LANGUAGE_CD type="CHAR"/>
    <AUDIT_ACTN type="CHAR"/>
    <BASE_LANGUAGE_CD type="CHAR"/>
    <MSG_SEQ_FLG type="CHAR"/>
    <PROCESS_INSTANCE type="NUMBER"/>
    <PUBLISH_RULE_ID type="CHAR"/>
    <MSGNODENAME type="CHAR"/>
  </PSCAMA>
</FieldTypes>
</xsl:template>

```

The interesting thing about this template is that it is basically an instruction to insert static text into the output document. Of course, this makes sense, as the FieldTypes section is dependant upon the message structure, and not the actual data contained within any particular message instance. Also note that there is no further node selection in this template, so after the XML is emitted this particular path through the XML ends.

- Now that the FieldTypes nodes have been processed, the transform engine processes the MsgData node using the following matching template:

```

<xsl:template match="MsgData">
  <MsgData>
    <xsl:apply-templates select="Transaction"/>
  </MsgData>
</xsl:template>

```

The template is quite simple. The transformation engine is to put a starting MsgData node in the output document, and then process the Transaction nodes in the input document. Note that the node context has changed: the current node in the input document being processed is the MsgData node. The call to select then implies that all child Transaction nodes under the MsgData are to be selected.

- The Transaction nodes under MsgData are matched by the following template:

```

<xsl:template match="Transaction">
  <Transaction>
    <xsl:apply-templates select="PURCHASEORDER"/>
    <PSCAMA class="R">
      <LANGUAGE_CD>ENG</LANGUAGE_CD>
      <AUDIT_ACTN/>
      <BASE_LANGUAGE_CD>ENG</BASE_LANGUAGE_CD>
      <MSG_SEQ_FLG/>
      <PROCESS_INSTANCE>0</PROCESS_INSTANCE>
      <PUBLISH_RULE_ID/>
      <MSGNODENAME/>
    </PSCAMA>
  </Transaction>
</xsl:template>

```

A Transaction start tag is written to the output document, and then the PURCHASEORDER nodes are to be handled. Once these nodes have been processed, the PSCAMA information will be written out, along with the closing Transaction tag.

5. The call to handle the PURCHASEORDER node invokes:

```
<xsl:template match="PURCHASEORDER">
  <PO_HEADER class="R">
    <PO_NUMBER IsChanged="Y">
      <xsl:value-of select="PURCHASEORDERNUM"/>
    </PO_NUMBER>
    <PO_DATE IsChanged="Y">
      <xsl:value-of select="PURCHASEORDERDATE"/>
    </PO_DATE>
    <xsl:apply-templates select="PURCHASEDITEMS"/>
  </PO_HEADER>
</xsl:template>
```

The PO_HEADER start tag is emitted as well as the child PO_NUMBER and PO_DATE elements. The call out to xs:value-of means that node values from the input message are copied to the output message. In this case, the node PO_NUMBER in the output message is given the value from PURCHASEORDERNUM in the input message. PO_DATE is given the value from PURCHASEORDERDATE. Once these two elements have been written out, the transformation engine is then told to process the PURCHASEDITEMS nodes in the input document.

6. Each PURCHASEDITEMS node in the input message causes the following template to be executed:

```
<xsl:template match="PURCHASEDITEMS">
  <PO_ITEM class="R">
    <SKU IsChanged="Y"><xsl:value-of select="ITEM"/></SKU>
    <CUSTNAME IsChanged="Y">
      <xsl:value-of select="../SHIPPINGDETAILS/NAME"/>
    </CUSTNAME>
    <SHIPPER IsChanged="Y">
      <psft_function name="codeset" codesetname="SCM_CODESET">
        <parm name="CARRIER_ID">
          <xsl:value-of select="../SHIPPINGDETAILS/CARRIER_ID"/>
        </parm>
        <value name="SHIPPER" select="."/>
      </psft_function>
    </SHIPPER>
    <DESTADD IsChanged="Y">
      <xsl:value-of select="../SHIPPINGDETAILS/ADDRESS"/>
    </DESTADD>
    <DESTCITY IsChanged="Y">
      <xsl:value-of select="../SHIPPINGDETAILS/CITY"/>
    </DESTCITY>
    <DESTSTATE IsChanged="Y">
      <xsl:value-of select="../SHIPPINGDETAILS/STATE"/>
    </DESTSTATE>
  </PO_ITEM>
</xsl:template>
```

This is where the bulk of the building of the output message is performed. For each PURCHASEDITEMS node in the input document, this template will be run once. The template is responsible for building out the PO_ITEM element and children in the output message. As in the template for PURCHASEORDER, this template uses the values from the input message and copies them across to the output message. For example, the SKU element in the output is given the value from the ITEM node in the input. Also note that the SHIPPER node contains a reference to psft-function and the SCM_CODESET. At this stage in the transformation, this text is static except for the value-of call to “../SHIPPINGDETAILS/CARRIER_ID”, which will be resolved to “USPS”. The actual codeset lookup will not be done at this point; this will occur in the second pass.

7. After the PURCHASEDITEMS template completes, the transformation jumps back to step 5, and outputs the closing PO_HEADER template.

8. Once the PURCHASEORDER template in step 5 completes, the transformation jumps back to step 4, and the Transaction template is completed. At this point the PSCAMA section in the template is written to the output message.
9. After the Transaction template in step 4 completes, the transformation jumps back to step 3, and the MsgData template. At this point the closing MsgData tag is written to the output message.
10. After the MsgData template in step 3 completes, the transformation jumps back to step 1. At this point the closing PO_MSG tag is written out, and the first part of the transformation process ends.

Transformation Processing: Second Pass

This section discusses the second pass of transform processing, during which the psft_function calls are resolved and the codeset values are placed into the document.

Assuming that no errors were encountered in the processing in the first pass a complete XML document will be available, containing the formatted PeopleSoft CRM purchase order message. However, this XML will still contain the reference:

```
<SHIPPER IsChanged="Y">
  <psft_function name="codeset" codesetname="SCM_CODESET">
    <parm name="CARRIER_ID">USPS</parm>
    <value name="SHIPPER" select="."/>
  </psft_function>
</SHIPPER>
```

The second pass walks through the message and resolves all calls to psft_function. In this instance the codeset lookup will be run, and the psft_function node will be replaced with the result. The XML in the output message will then look like:

```
<SHIPPER IsChanged="Y">
  United States Postal Service
</SHIPPER>
```

After the second pass completes, the transform is complete.

Testing the Transformation

The Transform Test utility is very useful when creating message transforms, since it allows one to exercise the transform without actually having service operations being invoked.

This section discusses using the utility to verify the example in this topic.

To test the transformation:

1. Save to file the example message XML from the Message Definition: PeopleSoft SCM Node section presented earlier in this topic.
2. Put the XSL from the Setting Up The Transformation section of this topic in an application engine program.
3. Access the Transformation Test utility.

Select **PeopleTools > Integration Broker > Service Utilities > Test XSLT Transformations**.

The Transformation Test Utility page appears.

4. Add a new project.
5. In the *Program Name* field, enter in the name of the application engine program containing the XSL.
6. In the *Source Node Name* field, enter in the node name for the PeopleSoft SCM node.
7. In the *Destination Node Name* field enter in the node name for the CRM node.
8. In the *File Name* field, enter in the fully qualified path name of the file containing the input message.
9. Click the *Transform* button.

The transformed XML appears in the **Message Text** text box.

Understanding Migrated Integration Metadata

Understanding Migrated Integration Metadata

These topics provide an overview of metadata migrated from PeopleSoft 8.47 and earlier database to PeopleSoft 8.48 and later databases.

The following table summarizes how objects are migrated between PeopleTools 8.47 and earlier releases and PeopleTools 8.48 and later releases:

<i>PeopleTools 8.4x Objects (PeopleTools 8.47 and Earlier)</i>	<i>PeopleTools 8.48 and Higher Objects</i>
Node.	Node.
Channel.	Queue.
Message.	Message.
Node transactions and relationships.	Service, Service Operations, Service Operation Versions, and Routings.
Message and Subscription PeopleCode.	Application classes and service operation handlers.

Note: All objects migrated to PeopleTools 8.48 and higher releases have the Owner ID of the message from which they were created. Any invalid Owner IDs are deleted at the time of upgrade. If no Owner ID exists for an object, you must manually define one in the PeopleTools 8.48 or higher database.

Node Objects

Upgraded node objects are assigned a Default User ID as defined in the upgrade script.

In PeopleTools 8.48 and higher releases security is implemented at the user ID level. The default user ID is used in conjunction with securing service operations.

Channel Objects

Channels have been converted to queues.

The new queue name should be the same as the old channel name.

As part of the upgrade/conversion, any related language data associated with the channel should also be brought over to the newly created queue definition.

Message Objects

Messages are shapes that provide the physical description of the contents of a service operation transaction, and describe the data being sent, including fields, field types, and field lengths.

Unlike PeopleTools 8.47 and earlier releases, beginning with PeopleTools 8.48 messages do not contain any processing logic, such as PeopleCode events or subscriptions. All processing logic is created by extending a set of delivered application classes, and associating those application classes to service operations using service operation handlers.

Node Transaction and Relationship Objects

Node transactions and relationships are migrated to services, service operations and routing definitions.

Service Objects

During the upgrade process, a service definition is created for each distinct message referenced in the node transaction table.

A service inherits most of its properties from the message, including description, long description, Owner ID, language code, and so on.

The service name in PeopleTools 8.48 and higher releases is the same as the message name in the PeopleTools 8.47 or earlier system.

Any related language data associated with the message is inherited by the service.

Service Operation Objects

Service operations have the same name as the service to which they are associated.

Complex transactions like asynchronous or synchronous transactions with transformations, hub transactions or async-to-sync are defined by grouping a set of node transactions and relationships together. As the complex cases are upgraded, the system separates node transactions that were created for these complex cases (for example an asynchronous hub case) from the simple cases (for example, outbound asynchronous requests with no transformation). Asynchronous and synchronous node transactions that do not participate in a relationship (for example, those that are left over after we settled the complex cases) in PeopleTools 8.47 and earlier releases become service operations in PeopleTools 8.48 and higher releases.

Warning! If there is no node transaction on the PeopleTools 8.47 or earlier system, no service operation is created on the PeopleTools 8.48 or higher system during upgrade.

In cases where a PeopleTools 8.47 or earlier node has both synchronous and asynchronous transactions, the first transaction defined on the node is migrated as a service operation; the second message cannot be created and an error is generated to the output log at the time of upgrade.

For asynchronous-to-synchronous transactions on a PeopleTools 8.47 or earlier system, the following occurs during the upgrade process to PeopleTools 8.48 or higher system:

- The service operation is named after the outbound message name.
- The request message is named after the outbound asynchronous message.
- The response message is named after the asynchronous response message specified in the relationship.

In PeopleTools 8.47 and earlier systems the `IsActive` property of the `Message` class was used to check the active property on the message. In PeopleTools 8.48 and higher systems it checks the service operation. In cases where a service operation is not created for a message, the `IsActive` property returns *False*. Therefore there may be a behavioral change from previous releases. In cases where there is no service operation created, and you want the previous behavior preserved, you must create a service operation and set the operation state to match that which was on the message.

Routing Objects

The upgrade process creates point-to-point routing definitions in the PeopleTools 8.48 or higher system based on node transactions and relationships defined in the PeopleTools 8.47 or earlier system.

Only current relationships in the PeopleTools 8.47 or earlier system are migrated.

The Active/Inactive flag on the transaction in the PeopleTools 8.47 or earlier system determines whether the routing definition is active or inactive in the PeopleTools 8.48 or later system.

The connector information defined on the outbound transaction is used in the routing definition. You must manually update aliases on routing definitions that use custom connectors.

When the system creates routing definitions during the upgrade process, the external message name from the transaction is used as the routing alias, if one was defined. If there is no value in the external message name, messages on nodes that are marked as *External* use the PeopleTools 8.47 or earlier system alias message name. PeopleTools 8.47 and earlier system nodes marked as anything other than *External* use the PeopleTools 8.48 alias format of *serviceoperation.version*.

All routing definitions created during the upgrade process are point-to-point routings, with one exception. In cases where on the PeopleTools 8.47 or earlier system there is an inbound synchronous or asynchronous node transaction on the default local node without a corresponding outbound synchronous or asynchronous node transaction (via relationship) on the default local node, an any-to-local routing definition is created during the upgrade.

Understanding Migrated Integration PeopleCode

The following table summarized how PeopleCode has been migrated between PeopleTools 8.4x releases and PeopleTools 8.48:

<i>PeopleTools 8.4x PeopleCode (PeopleTools 8.47 and Earlier)</i>	<i>PeopleTools 8.48 and Higher PeopleCode</i>
Message and subscription PeopleCode.	Application classes.
PeopleCode events.	Service operation handlers.

All PeopleCode referenced in a message is converted to an application class, which is in turn then referenced by a handler that is created in the service operation generated by the converted message.

Application Classes

PeopleCode defined on messages in PeopleTools 8.47 and earlier releases is migrated into application classes in PeopleTools 8.48 and higher releases.

Application classes have to belong to an application package. The message name becomes the application package name and description. The exception for this naming convention is when an application package already exists on the PeopleTools 8.48 or higher system that matches the message name. In this case the application package is stripped of all underscores and the number *1* is appended to the end of the name.

For every subscription event associated with a message, an application class is created in the PeopleTools 8.48 or higher system with a similar name as the subscription event. Since application class names cannot contain special characters, those found in the subscription event name are simply replaced with an underscore.

Default values for application class names are used for the other message events.

If a PeopleTools 8.47 or earlier message has no PeopleCode defined on it, no application package is generated for it in the PeopleTools 8.48 or higher system.

Application classes that fail to compile are saved and commented out. In these cases, a deprecated handler is created to invoke the old message or subscription event, to behave, runtime-wise, as it did in PeopleTools 8.47 and earlier systems. The user, however, is responsible for correcting any application classes that failed to compile and modifying any service operation definition that makes use of the deprecated handler.

See [Correcting Integration PeopleCode That Did Not Migrate](#).

PeopleCode Methods

The following table describes how PeopleCode events from PeopleTools 8.47 and earlier releases map to PeopleTools 8.48 and higher methods.

<i>PeopleTools 8.4x Integration PeopleCode Events (PeopleTools 8.47 and Earlier)</i>	<i>PeopleTools 8.48 Integration PeopleCode Base Classes and Methods (PeopleTools 8.48 and Higher)</i>
OnRequest	IRequestHandler:OnRequest

<i>PeopleTools 8.4x Integration PeopleCode Events (PeopleTools 8.47 and Earlier)</i>	<i>PeopleTools 8.48 Integration PeopleCode Base Classes and Methods (PeopleTools 8.48 and Higher)</i>
OnAckReceive	IReceiver:OnAckReceive
OnRouteReceive	IRouter: OnRouteReceive
OnRouteSend	IRouter:OnRouteSend
OnSend	ISend:OnRequestSend
Subscription	INotification:OnNotify

Built-In Functions

Many PeopleCode built-in functions have been deprecated for the new PeopleSoft Integration Broker model. Most of the PeopleTools 8.47 and earlier built-in functions have been internally redirected to work with the PeopleTools 8.48 and later equivalent. When compiling PeopleCode that uses the PeopleTools 8.47 and earlier built-in functions, an informational message appears that explains that the given built-in has been deprecated.

Other Migrated Constructs

The following constructs are also migrated during the upgrade process:

- Import statements.
- Function libraries.
- Variables not explicitly declared.

Special Characters

During the upgrade process, any special characters that used in the name of PeopleCode constructs in the PeopleTools 8.47 or earlier PeopleCode, such as slashes (“/”), single quotation marks (“'”), and periods (.) are replaced with underscores (_).

Correcting Integration PeopleCode That Did Not Migrate

This section provides an overview of integration PeopleCode that did not migrate and how to correct it.

Understanding Integration PeopleCode That Did Not Migrate

This section discusses the reasons why integration events and subscriptions might not successfully migrate to application classes during the upgrade from PeopleTools 8.47 and earlier systems to PeopleTools 8.48 and higher systems and the *Deprecated* type service operation handler used to manage such PeopleCode.

Reasons Why Integration PeopleCode Does Not Migrate

Integration events and subscriptions might not successfully migrate to application classes for the following reasons:

- Use of global variables.
- Use of component variables.
- Use of constants.
- Use of local functions.
- Inability to determine the return type or the return type is incorrect.

Deprecated PeopleCode Handler

The PeopleSoft system creates a deprecated PeopleCode handler for any integration PeopleCode that cannot be migrated to the PeopleTools 8.48 or higher system.

Deprecated handlers enable you to run PeopleTools 8.47 and earlier PeopleCode (subscription or OnRequest). However, PeopleSoft recommends that you correct the PeopleCode and migrate the code into an *Application Class* type handler for use in the PeopleTools 8.48 or higher system.


See [Correcting Non-Migrated Integration PeopleCode](#).

Correcting Non-Migrated Integration PeopleCode

This section discusses correcting non-migrated PeopleCode and creating an *Application Class* type handler.

The following example shows an application class created for the PeopleTools 8.47 or earlier message *PT_CDB_SECURITY*. During the upgrade process, the system was unable to migrate the integration PeopleCode defined on the message.

This example illustrates a PeopleTools 8.48 application class created for the PeopleTools 8.4x message *PT_CDB_SECURITY*.

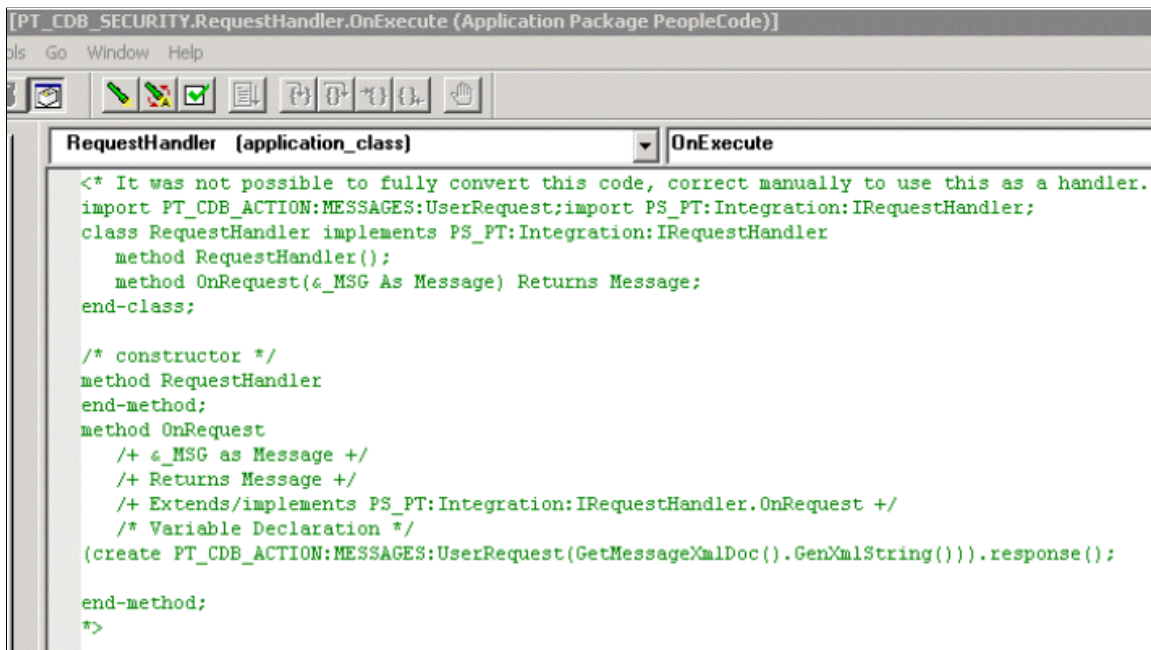

To correct non-migrated integration PeopleCode:

1. In PeopleSoft Application Designer, open the migrated application package.

The package name is generally the same as the message name in the PeopleTools 8.47 or earlier system.

2. Remove the "<*" and ">*" symbols, as well as the comments from the code.
3. Compile the code.

If the code did not migrate for one of the following reasons, the system displays a meaningful error message to assist you in correcting the problem:

- Use of component scope variables.
- Use of global variables or constant variables
- Incorrect return type for handler.

If the reason for the failure is due to the use of a local function, modify the PeopleCode to ensure that the function is passing appropriate types for the context in the application package.

4. Correct the PeopleCode and save the changes.
5. Delete the deprecated handler.
 - a. Select **PeopleTools > Integration Broker > Service Utilities > Integration Broker Admin**. Click the **Deprecated PeopleCode** tab.

The Deprecated PeopleCode page appears.

- b. In the **Service Operation** field, enter the name of the service operation that contains the deprecated handler to delete and click the **Search** button.
 - c. In the Select column, select the check box next to the service operation name that contains the deprecated handler to delete.
 - d. Click the **Delete** button.
6. Add an *Application Class* type handler to the service operation definition that references the modified PeopleCode.

See [Adding Handlers to Service Operations](#).

7. In the message definition that was migrated to the PeopleTools 8.48 or higher system, delete the PeopleCode event or Subscription that is defined on the message.

Open the PeopleCode editor for the respective event and null out the program that exists there. Several warnings appear when saving the program, but your changes will be committed.

Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables

Understanding Setting PS_FILEDIR, PS_SERVDIR, and PS_TREEBASEDIR Environment Variables

Some features of PeopleSoft Integration Broker enable you or require that you upload, import or consume data from files. For example, the system enables you to upload XML data from files to populate messages or consume WSDL from files.

In these and most other situations where you upload, import, or consume data from files, you must set the PS_FILEDIR environment variable on the machine on which the application server resides before you can successfully perform these actions.

The PS_TREEBASEDIR environment variable is used for tree import and export.

The procedure for setting the PS_FILEDIR and PS_TREEBASEDIR environment variables is identical.

Some features reference the PS_SERVDIR environment variable, which is set when you start PSADMIN.

See “Setting the PS_SERVDIR Environment Variable ” (System and Server Administration).

Setting PS_FILEDIR and PS_TREEBASEDIR in Microsoft Windows Environments

Use the following procedure to set the PS_FILEDIR or PS_TREEBASEDIR environment variable in Windows.

To set the PS_FILEDIR or PS_TREEBASEDIR environment variable in Microsoft Windows environments:

1. Close any open DOS windows.
2. On your desktop, right-click the **My Computer** icon and click **Properties**.

The System Properties dialog appears.

3. Click the **Advanced** tab.
4. In the Environment Variables section, click the **Environment Variables** button.

The Environment Variables dialog box appears.

5. In the User variables for <user name> section, click **New**.

- A New User Variable dialog box displays.
- a. In the **Variable Name** field enter *PS_FILEDIR* or *PS_TREEBASEDIR*.
 - b. In the **Variable Value** field, enter *c:\temp*.
 - c. Click the **OK** button to close the dialog box.
6. In the System variables section, click New. The New System Variable dialog box appears.
- a. In the **Variable Name** field enter *PS_FILEDIR* or *PS_TREEBASEDIR*.
 - b. In the **Variable Value** field, enter *c:\temp*, unless the documentation for the feature with which you are working states that you should enter a different value.
 - c. Click the **OK** button to close the dialog box.
7. Click the **OK** button again to exit the System Properties dialog box.

Setting PS_FILEDIR and PS_TREEBASEDIR in UNIX Environments

To set the PS_FILEDIR and PS_TREEBASEDIR variable in UNIX use one of the following commands as appropriate for your UNIX environment.

Note that the path you specify in either command is the location from where the system will upload files. The documentation for the feature with which you are working may state a specific path to enter.

To set PS_FILEDIR:

- `export PS_FILEDIR = <PS_HOME>/file`
- `setenv PS_FILEDIR = <PS_HOME>/file`

To set PS_TREEBASEDIR:

- `export PS_TREEBASEDIR = <PS_HOME>/file`
- `setenv PS_TREEBASEDIR = <PS_HOME>/file`