

Oracle® Public Cloud Machine

Using the Eventbrite Adapter

Release 16.3.1

E74257-02

October 2016

This guide describes how to configure and add the Eventbrite Adapter to an Oracle Integration Cloud Service integration.

Oracle Public Cloud Machine Using the Eventbrite Adapter, Release 16.3.1

E74257-02

Copyright © 2016, Oracle and/or its affiliates. All rights reserved.

Primary Author: Mark Kenendy

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface	v
Audience	v
Related Resources	v
Conventions	v
1 Getting Started with the Eventbrite Adapter	
About the Eventbrite Adapter	1-1
What Application Version Does the Eventbrite Adapter Support?	1-1
About Oracle Integration Cloud Service	1-2
About Oracle Integration Cloud Service Connections	1-2
About Oracle Integration Cloud Service Integrations	1-2
Typical Workflow for Creating and Including an Adapter Connection	1-3
2 Creating an Eventbrite Adapter Connection	
Prerequisites for Creating a Connection	2-1
Uploading an SSL Certificate	2-2
Creating a Connection	2-2
Adding a Contact Email	2-4
Configuring Connection Security	2-4
Testing the Connection	2-5
Editing a Connection	2-5
Cloning a Connection	2-5
Deleting a Connection	2-6
3 Creating an Integration	
4 Adding the Eventbrite Adapter Connection to an Integration	
Configuring Basic Information Properties	4-1
What You Can Do from the Basic Info Page	4-1
What You See on the Basic Info Page	4-1
Configuring Eventbrite Adapter Invoke Operation Selection Properties	4-2
What You Can Do from the Eventbrite Adapter Operation Selection Page	4-2

What You See on the Eventbrite Adapter Operation Selection Page	4-2
Reviewing Configuration Values on the Summary Page	4-3
What You Can Do from the Summary Page	4-3
What You See on the Summary Page	4-3

5 Creating Mappings and Lookups in Integrations

6 Administering Integrations

Preface

Using the Eventbrite Adapter describes how to configure the Eventbrite Adapter as a connection in an integration in Oracle Integration Cloud Service.

Topics:

- [Audience](#)
- [Related Resources](#)
- [Conventions](#)

Audience

Using the Eventbrite Adapter is intended for developers who want to use the Eventbrite Adapter in integrations in Oracle Integration Cloud Service.

Related Resources

For more information, see these Oracle resources:

- *Using Oracle Integration Cloud Service*
- *Using the Oracle Mapper*
- Oracle Public Cloud Machine documentation in the Oracle Help Center:
<http://docs.oracle.com>

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Getting Started with the Eventbrite Adapter

Review the following conceptual topics to learn about the Eventbrite Adapter and how to use it as a connection in integrations in Oracle Integration Cloud Service. A typical workflow of adapter and integration tasks is also provided.

Topics

- [About the Eventbrite Adapter](#)
- [What Application Version Does the Eventbrite Adapter Support?](#)
- [About Oracle Integration Cloud Service](#)
- [About Oracle Integration Cloud Service Connections](#)
- [About Oracle Integration Cloud Service Integrations](#)
- [Typical Workflow for Creating and Including an Adapter Connection in an Integration](#)

About the Eventbrite Adapter

The Eventbrite Adapter enables you to create an integration with an Eventbrite application.

Eventbrite is a global marketplace for live experiences that enables you to find and create events throughout the world. Eventbrite enables event organizers to plan, promote, and sell tickets to events (event management) and publish the events across Facebook, Twitter, and other social-networking sites directly from the site interface. Attendees can find and purchase tickets to these events.

The Eventbrite Adapter is one of many predefined adapters included with Oracle Integration Cloud Service. You can configure the Eventbrite Adapter as a connection in an integration in Oracle Integration Cloud Service. For information about Oracle Integration Cloud Service, connections, and integrations, see the following sections:

- [About Oracle Integration Cloud Service](#)
- [About Oracle Integration Cloud Service Connections](#)
- [About Oracle Integration Cloud Service Integrations](#)

What Application Version Does the Eventbrite Adapter Support?

The Eventbrite Adapter is compatible with version 3 of the Eventbrite API.

About Oracle Integration Cloud Service

Oracle Integration Cloud Service is a complete, secure, but lightweight integration solution that enables you to connect your applications in the cloud. It simplifies connectivity between your applications, and can connect both your applications that live in the cloud and your applications that still live on premises. Oracle Integration Cloud Service provides secure, enterprise-grade connectivity regardless of the applications you are connecting or where they reside.

Oracle Integration Cloud Service provides native connectivity to Oracle Software as a Service (SaaS) applications, such as Oracle Sales Cloud, Oracle RightNow Cloud, and so on. Oracle Integration Cloud Service *adapters* simplify connectivity by handling the underlying complexities of connecting to applications using industry-wide best practices. You only need to create a *connection* that provides minimal connectivity information for each system. Oracle Integration Cloud Service *lookups* map the different codes or terms used by the applications you are integrating to describe similar items (such as country or gender codes). Finally, the visual data mapper enables you to quickly create direct mappings between the trigger and invoke data structures. From the mapper, you can also access lookup tables and use standard XPath functions to map data between your applications.

Once you integrate your applications and activate the integrations to the runtime environment, the dashboard displays information about the running integrations so you can monitor the status and processing statistics for each integration. The dashboard measures and tracks the performance of your transactions by capturing and reporting key information, such as throughput, the number of messages processed successfully, and the number of messages that failed processing. You can also manage business identifiers that track fields in messages and manage errors by integrations, connections, or specific integration instances.

About Oracle Integration Cloud Service Connections

Connections define information about the instances of each predefined configuration you are integrating. Oracle Integration Cloud Service includes a set of predefined *adapters*, which are the types of applications on which you can base your connections, such as Oracle Sales Cloud, Oracle Eloqua Cloud, Oracle RightNow Cloud, and others. A connection is based on an adapter. A connection includes the additional information required by the adapter to communicate with a specific instance of an application (this can be referred to as metadata or as connection details). For example, to create a connection to a specific RightNow Cloud application instance, you must select the Oracle RightNow adapter and then specify the WSDL URL, security policy, and security credentials to connect to it.



About Oracle Integration Cloud Service Integrations

Integrations are the main ingredient of Oracle Integration Cloud Service. An integration includes at the least a trigger (source) connection (for requests sent to Oracle Integration Cloud Service) and invoke (target) connection (for requests sent from Oracle Integration Cloud Service to the target) and the field mapping between those two connections.

When you create your integrations, you build on the [connections](#) you already created by defining how to process the data for the trigger (source) and invoke (target) connections. This can include defining the type of operations to perform on the data, the business objects and fields against which to perform those operations, required

schemas, and so on. To make this easier, the most complex configuration tasks are handled by Oracle Integration Cloud Service. Once your trigger (source) and invoke (target) connections are configured, the mappers between the two are enabled so you can define how the information is transferred between the trigger (source) and invoke (target) data structures for both the request and response messages.



Typical Workflow for Creating and Including an Adapter Connection in an Integration

You follow a very simple workflow to create a connection with an adapter and include the connection in an integration in Oracle Integration Cloud Service.

This table lists the workflow steps for both adapter tasks and overall integration tasks, and provides links to instructions for each step.

Step	Description	More Information
1	Create the adapter connections for the applications you want to integrate. The connections can be reused in multiple integrations and are typically created by the administrator.	Creating an Eventbrite Adapter Connection
2	Create the integration. When you do this, you add trigger and invoke connections to the integration.	Creating an Integration and Adding the Eventbrite Adapter Connection to an Integration
3	Map data between the trigger connection data structure and the invoke connection data structure.	<i>Mapping Integration Cloud Service Data of Using Oracle Integration Cloud Service</i>
4	(Optional) Create lookups that map the different values used by those applications to identify the same type of object (such as gender codes or country codes).	<i>Creating Lookups of Using Oracle Oracle Integration Cloud Service</i>
5	Activate the integration.	<i>Managing Integrations of Using Oracle Integration Cloud Service</i>
6	Monitor the integration on the dashboard.	<i>Monitoring Integration Cloud Services of Using Oracle Integration Cloud Service</i>
7	Track payload fields in messages during runtime.	<i>Assigning Business Identifiers for Tracking Fields in Messages and Managing Business Identifiers for Tracking Fields in Messages of Using Oracle Integration Cloud Service</i>
8	Manage errors at the integration level, connection level, or specific integration instance level.	<i>Managing Errors of Using Oracle Integration Cloud Service</i>

Creating an Eventbrite Adapter Connection

A connection is based on an adapter. You define connections to the specific cloud applications that you want to integrate. The following topics describe how to define connections:

Topics

- [Prerequisites for Creating a Connection](#)
- [Uploading an SSL Certificate](#)
- [Creating a Connection](#)
- [Adding a Contact Email](#)
- [Configuring Connection Security](#)
- [Testing the Connection](#)
- [Editing a Connection](#)
- [Cloning a Connection](#)
- [Deleting a Connection](#)

Prerequisites for Creating a Connection

To use the Eventbrite Adapter, you must first have access to the Eventbrite APIs for your integration. To access these APIs, you must create an Eventbrite Application Management account.

To create an Eventbrite Application Management account:

1. Go to <https://www.eventbrite.com/login>. If you do not have an account, create one.

Await the arrival of the activation email.

2. Log in with the registered email address and password.
3. Go to <https://www.eventbrite.com/myaccount/apps>.
4. Click **CREATE A NEW APP**.
5. In the **Request a new key** section, enter contact information and application details per your business requirements.
6. In the **OAuth Redirect URI** field, enter `https://{ICS_HOST}:{ICS_SSL_PORT}/icsapis/agent/oauth/callback` and submit the form.

7. Read and agree to the terms of agreement.
8. Click **CREATE KEY**.
9. Note down details about the created key and application key (client ID). You also receive an email.

Note: Before creating an Eventbrite connection, you must upload the trusted Eventbrite public certificate to Oracle Integration Cloud Service. The Eventbrite public certificate can be downloaded from <https://www.eventbrite.com>. If not already done, rename the file extension to `.cer`. To upload the certificate, see [Uploading an SSL Certificate](#).

Uploading an SSL Certificate

Certificates are used to validate outbound SSL connections. If you make an SSL connection in which the root certificate does not exist in Oracle Integration Cloud Service, an exception is thrown. In that case, you must upload the appropriate certificate. A certificate enables Oracle Integration Cloud Service to connect with external services. If the external endpoint requires a specific certificate, request the certificate and then upload it into Oracle Integration Cloud Service.

To upload a certificate:

1. From the Oracle Integration Cloud Service home page, click the **Administration** tab in the upper right corner.

All certificates currently uploaded to the trust store are displayed in the Certificates dialog. A navigation panel on the left side of the dialog displays the following details:

- **All:** Displays all certificates in Oracle Integration Cloud Service.
 - **System:** Displays the certificates automatically included in Oracle Integration Cloud Service. These certificates cannot be deleted.
 - **Uploaded:** Displays the certificates uploaded by individual users. These certificates can be deleted and updated.
2. Click **Upload Certificate** at the top of the page.
 3. In the Upload Certificate dialog box, enter a unique identifier for the certificate.
This is a name you can use to identify the certificate.
 4. Click **Browse** to locate the certificate file (`.cer`).
 5. Click **Upload**.
 6. Click the certificate name to view details such as the subject of the certificate, the issuer of the certificate, the date the certificate was issued, and the date the certificate expires.


Creating a Connection

The first step in creating an integration is to create the connections to the applications with which you want to share data.


1. In the Integration Cloud Service toolbar, click **Designer**.



2. On the Designer Portal, click **Connections**.

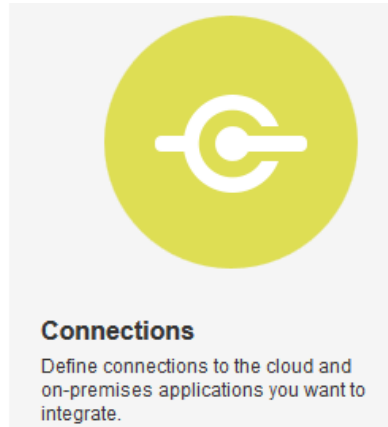

3. Click **Create New Connection**.

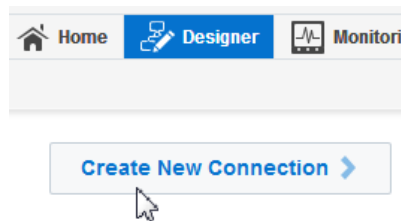

The Create Connection — Select Adapter dialog is displayed.

4. Select an adapter from the dialog. You can also search for the type of adapter to use by entering a partial or full name in the Search field, and clicking **Search**.

The New Connection — Information dialog is displayed.

5. Enter the information to describe the connection. Use a meaningful name to help others find your connection when they begin to create their own integrations.

New Connection - Information

Enter information that describes the connection. Use a meaningful name and description to help others find your connection when they create their own integrations. The Identifier must be unique and can be set only when the connection is created.

* Connection Name

* Identifier

Description

6. Click **Create**.

Your connection is created and you are now ready to configure connection details, such as email contact, connection properties, security policies, and connection login credentials.

Adding a Contact Email

From the Connection Administrator section of the connection, you can add a contact email address for notifications.

1. In the **Email Address** field, enter an email address to receive email notifications when problems occur.
2. In the upper right corner, click **Save**.

Configuring Connection Security

Configure security for your Eventbrite connection by selecting the security policy and setting login credentials.

1. Click **Configure Credentials**.
2. Select your security policy:
 - **Custom Security Policy**: This is a customized security policy for an Eventbrite connection.
 - **OAuth**: Enables you to use OAuth Authorization Code Credentials with your connection.
3. If you selected **Custom Security Policy**:
 - a. Enter the client ID and the client secret created after completing the steps in [Prerequisites for Creating a Connection](#). The client ID is the application key sent by email. The client secret is displayed on the application management page for each application key.

- b. Click **Provide Consent** to allow consent.
4. If you selected **OAuth**:
 - a. Enter the security token created after completing the steps in [Prerequisites for Creating a Connection](#). The security token is displayed on the application management page as **Your personal OAuth token** for each application key.
5. Click **OK**.

You are now ready to test your connection.

Testing the Connection

Test your connection to ensure that it is successfully configured.

1. In the upper right corner of the page, click **Test**.


If successful, the following message is displayed and the progress indicator shows 100%.

The connection test was successful!
2. If your connection was unsuccessful, an error message is displayed with details. Verify that the configuration details you entered are correct.
3. When complete, click **Save**.

Editing a Connection

You can edit connection settings after creating a new connection.

1. In the Oracle Integration Cloud Service toolbar, click **Designer**.
2. On the Designer Portal, click **Connections**.
3. On the Connections page, select **Edit** from the connection **Actions** menu or click the connection name.




The Connection page is displayed.

4. To edit the notification email contact, change the email address in the **Email Address** field.
5. To edit the connection properties, click **Configure Connectivity**. Note that some connections do not include this button. If your connector does not include a **Configure Connectivity** button, then click the **Configure Credentials** button.

Cloning a Connection

You can clone a copy of an existing connection. It is a quick way to create a new connection.

1. In the Oracle Integration Cloud Service toolbar, click **Designer**.
2. On the Designer Portal, click **Connections**.
3. On the Connections page, select **Clone** from the connection **Actions** menu.



The Clone Connection dialog is displayed.

4. Enter the connection information.
5. Click **Clone**.
6. Click **Edit** to configure the credentials of your cloned connection. Cloning a connection does not copy the credentials.

See [Editing a Connection](#) for instructions.

Deleting a Connection

You can delete a connection from the connection menu.

1. In the Oracle Integration Cloud Service toolbar, click **Designer**.
2. On the Designer Portal, click **Connections**.
3. On the Connections page, click **Delete** from the connection **Actions** menu.



The Delete Connection dialog is displayed if the connection is not used in an integration.

4. Click **Yes** to confirm deletion.

Creating an Integration

Integrations use the adapter connections you created to your applications, and define how information is shared between those applications. You can create, import, modify, or delete integrations; create integrations to publish or subscribe to messages; add and remove request and response enrichment triggers; and create routing paths for different invoke endpoints in integrations. Click the following topics for more information.

Topic

- [Creating Integrations \(in *Using Oracle Integration Cloud Service*\)](#)



Adding the Eventbrite Adapter Connection to an Integration

When you drag the Eventbrite Adapter into the invoke area of an integration, the Adapter Endpoint Configuration Wizard appears. This wizard guides you through configuration of Eventbrite Adapter endpoint properties.

The following sections describe the wizard pages that guide you through configuration of the Eventbrite Adapter as an invoke in an integration. The Eventbrite Adapter cannot be used as a trigger in an integration.

Topics

- [Configuring Basic Information Properties](#)
- [Configuring Eventbrite Adapter Invoke Operation Selection Properties](#)
- [Reviewing Configuration Values on the Summary Page](#)

For more information about the Eventbrite Adapter, see [About the Eventbrite Adapter](#).

Configuring Basic Information Properties

You can enter a name and description on the Basic Info page of each trigger and invoke adapter in your integration.

Topics

- [What You Can Do from the Basic Info Page](#)
- [What You See on the Basic Info Page](#)

What You Can Do from the Basic Info Page

You can specify the following values on the Basic Info page. The Basic Info page is the initial wizard page that is displayed whenever you drag an adapter to the trigger (source) or invoke (target) area supported by your adapter.

- Specify a meaningful name.
- Specify a description of the responsibilities.

What You See on the Basic Info Page

The following table describes the key information on the Basic Info page.

Element	Description
What do you want to call your endpoint?	<p>Provide a meaningful name so that others can understand the responsibilities of this connection. You can include English alphabetic characters, numbers, underscores, and dashes in the name. You cannot include the following:</p> <ul style="list-style-type: none"> • Blank spaces (for example, My Inbound Connection) • Special characters (for example, #;83& or righ(t)now4) • Multibyte characters
What does this endpoint do?	<p>Enter an optional description of the connection's responsibilities. For example: This connection receives an inbound request to synchronize account information with the cloud application.</p>

Configuring Eventbrite Adapter Invoke Operation Selection Properties

Enter the Eventbrite Adapter invoke operation selection parameters.

Topics

- [What You Can Do from the Eventbrite Adapter Operation Selection Page](#)
- [What You See on the Eventbrite Adapter Operation Selection Page](#)

What You Can Do from the Eventbrite Adapter Operation Selection Page

You can configure the following parameter on the invoke Eventbrite Adapter Operation Selection page.

- Select the Eventbrite API operation to perform.

What You See on the Eventbrite Adapter Operation Selection Page

The following table describes the key information on the Eventbrite Adapter Operation Selection page.

Element	Description
Select Operation	Select the operation to invoke the Eventbrite API. The operation you select creates a new event and returns an event for the selected event. An API resource and query parameters are implicitly associated with the selected operation, but are not displayed on-screen. You specify query parameters when defining mappings in the mapper. Only selected parameters become part of the operation at runtime.

Reviewing Configuration Values on the Summary Page

You can review the specified adapter configuration values on the Summary page.

Topics

- [What You Can Do from the Summary Page](#)
- [What You See on the Summary Page](#)

What You Can Do from the Summary Page

You can review trigger (source) or invoke (target) configuration details from the Summary page. The Summary page is the final wizard page for each adapter after you have completed your configuration.

- View the configuration details you defined for the trigger (source) or invoke (target) adapter. For example, if you have defined an inbound trigger (source) adapter with a request business object and immediate response business object, specific details about this configuration are displayed on the Summary page.
- Click **Done** if you want to save your configuration details.
- Click a specific tab in the left panel or click **Back** to access a specific page to update your configuration definitions.
- Click **Cancel** to cancel your configuration details.

What You See on the Summary Page

The following table describes the key information on the Summary page.

Element	Description
Summary	<p>Displays a summary of the trigger (source) or invoke (target) configuration values you defined on previous pages of the wizard.</p> <p>The information that is displayed can vary by adapter. For some adapters, the selected business objects and operation name are displayed. For adapters for which a generated XSD file is provided, click the XSD link to view a read-only version of the file.</p> <p>To return to a previous page to update any values, click the appropriate tab in the left panel or click Back.</p>

Creating Mappings and Lookups in Integrations

You must map data between trigger connections and invoke connections in integrations. You can also optionally create lookups in integrations.

Topics

- Mapping Integration Cloud Service Data (in *Using Oracle Integration Cloud Service*)
- Creating Lookups (in *Using Oracle Integration Cloud Service*)



Administering Integrations

Oracle Integration Cloud Service provides you with the information and tools required to activate, monitor, and manage your integrations in the runtime environment.

Topic

- Administering Integration Cloud Service (in *Using Oracle Integration Cloud Service*)

