

Oracle® Communications Performance Intelligence Center

Observability Application Guide

Release 10.4.0.1

F26333-02

June 2020

Copyright © 2003, 2020 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the guide downloaded from Oracle Help Center.

Contents

Chapter 1: Overview	5
Introduction	5
Functional Overview	6
High-level Architecture	7
Chapter 2: Hardware Requirements	8
Chapter 3: Software Requirements	9
Chapter 4: Installation	10
Observability Application	10
Grafana Server	10
Grafana Application	10
InfluxDB Application	10
Chapter 5: Application Screens & Workflows	12
Bell Notification and Apply Change	13
User Details	14
Grafana Configuration	14
Add Grafana Server	15
Edit Grafana Server	16
Delete Grafana Server	17
Influx DB Configuration	18
Influx Server Configuration	18
Datasource Configuration	20
Custom KPI	23
Pre-Packaged KPI Configuration	26
Supported Resolution	29
Chapter 6: Troubleshooting	30
Grafana Troubleshooting	30
InfluxDB Troubleshooting	30
Browser Settings	30
Auto Refresh in Internet Explorer	30
Chapter 7: Appendices	31
Appendix A: My Oracle Support	31
Appendix B: Customize Pre-packaged Reports	32
Appendix C: How to generate API Key in Grafana	33

Figure 1: Landing page.....	12
Figure 2: Bell Notification and Apply Change Action.....	13
Figure 3:Grafana Configuration.....	14
Figure 4:Add Grafana Server.....	15
Figure 5:Edit Grafana Server.....	16
Figure 6:Delete Grafana Server.....	17
Figure 7:Add Influx Server.....	18
Figure 8:Edit Influx Server.....	19
Figure 9:Delete Influx Server.....	19
Figure 10:Add Datasource.....	20
Figure 11:Edit Datasource.....	21
Figure 12:Delete Datasource.....	22
Figure 13:Custom KPI Creation.....	23
Figure 14:Tag Key(s) Selection.....	24
Figure 15:Delete Custom KPI.....	25
Figure 16:Pre-packaged KPI Description.....	27
Figure 17:Delete Pre-packaged KPI.....	27
Figure 18:Apply Change.....	28
Figure 19:User Menu.....	28

Chapter 1: Overview


This section gives an overview of the new Observability Application in OCPIC. The new Observability application shall be responsible for creating configuration so that the KPIs generated by OCPIC mediation system is also stored on the server hosting InfluxDB and can be visualized using Grafana.

Introduction

The new observability feature in OCPIC will provide rich visualization by leveraging Grafana's dashboard capabilities. OCPIC will provide the integration with the Grafana Server, it will provide an option to the user to configure the data source for the Grafana server. The Grafana server will have the InfluxDB installed on it. The InfluxDB will store the KPIs exported from the OCPIC system and dashboards will be created using the Grafana. The mediation server will be enhanced to support writing into InfluxDB along with the Oracle database. The IxpStore process in the mediation server will use an HTTP interface to write into InfluxDB.

The configuration for the Grafana and InfluxDB data source shall be provided by a new Observability Application available on the OCPIC portal. The application additionally shall support the export of the custom KPIs and pre-packaged KPIs towards Grafana Server. The new Observability application shall be developed in OJET and Spring boot. The observability Application shall be available inside the Configuration perspective on the Management application portal.

Note: Only Management Admin user will be able to access the Observability Configuration Application

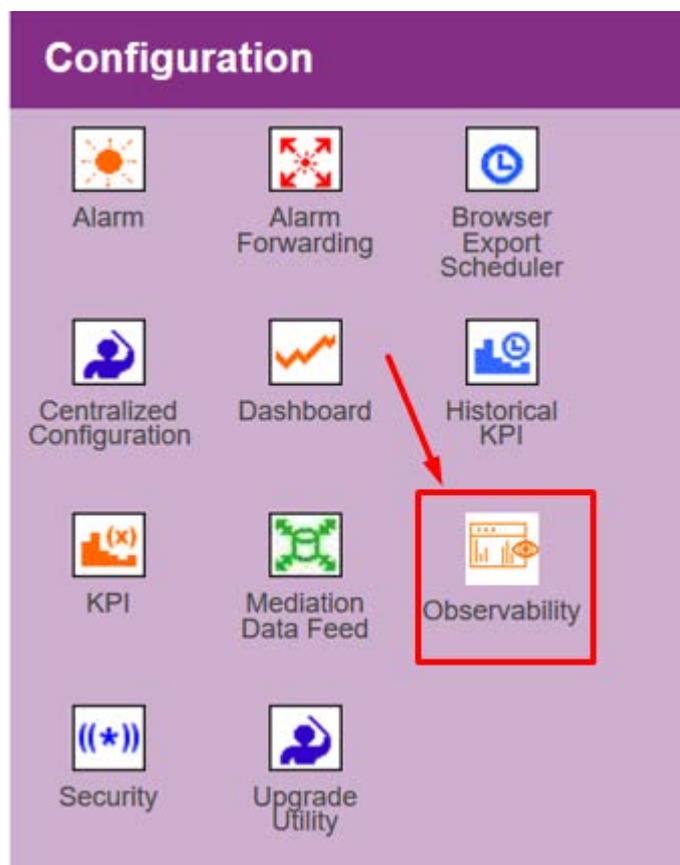


Functional Overview

The observability feature shall provide the following functionalities:

- **Grafana Server API key configuration:** The user will be required to configure the Grafana server API key for its Organization. The API key will be used by OCPIC Observability application to create the exports of the custom and pre-packaged KPIs on the Grafana server. The API key can be modified for the organization but once added can't be deleted. Currently, only one organization can be added to the observability application. The API key shall also be used for creating the pre-packaged dashboards on the Grafana Server. The OCPIC system shall store the API key into its database.
- **InfluxDB Data source configuration:** The user will be required to configure the InfluxDB data source. The InfluxDB credentials and data source URL will be required. The retention policy on the InfluxDB for the particular data source shall also be required during the configuration. More than one InfluxDB data sources are supported. Currently, the deletion of the data source on InfluxDB is not supported, however, the addition and modification of the data source on InfluxDB are supported. The InfluxDB parameters will be stored in OCPIC Management database and will be made available to the mediation server during the creation of the custom and pre-packaged KPIs export.
- **Custom KPIs Configuration:** The user will be required to export the KPIs into the InfluxDB in case it wants to create the visualization using the Grafana Dashboard capabilities. The user will select the input statistics sessions (output session of the KPIs already running on OCPIC system) and associate it with the InfluxDB data source created earlier. It will select the output session that shall be created on the InfluxDB, an option to select the Tag keys will be provided. The Tag keys are helpful in a group by queries on the Grafana Dashboard. After the custom KPI export is configured the user will be notified to sync the changes to the mediation server. On the completion of the sync action, an IxpStore process on the mediation server shall be created that shall be responsible for writing the KPIs generated by OCPIC system into the output session on InfluxDB. The custom KPIs can be viewed and deleted from the observability application.
- **Pre-packaged KPI Configuration:** The pre-packaged KPIs are the useful generic KPIs bundled with dashboard configurations. These are defined for the ease of OCPIC system users so that they don't have to configure the KPIs and dashboard separately. The prerequisite for the pre-packaged KPIs is that the input reconstitution session should already be created on the OCPIC system. The user can select the various 3G/4G/5G/VOIP and Usage statistics KPIs from the pre-packaged configuration screen available under the new Observability application. The dashboard configuration is also bundled along with the KPI definition. The KPIs selected for the pre-packaged dashboards are generic in nature and any customer-specific adaptations should be done using the custom KPI flow. The pre-packaged KPIs can be configured and deleted from the Observability application.
- **Launching Grafana Dashboard from Observability application:** The link to the Grafana dashboard will be available from the Observability application. On clicking this link the user shall be taken to the Grafana login page.

High-level Architecture

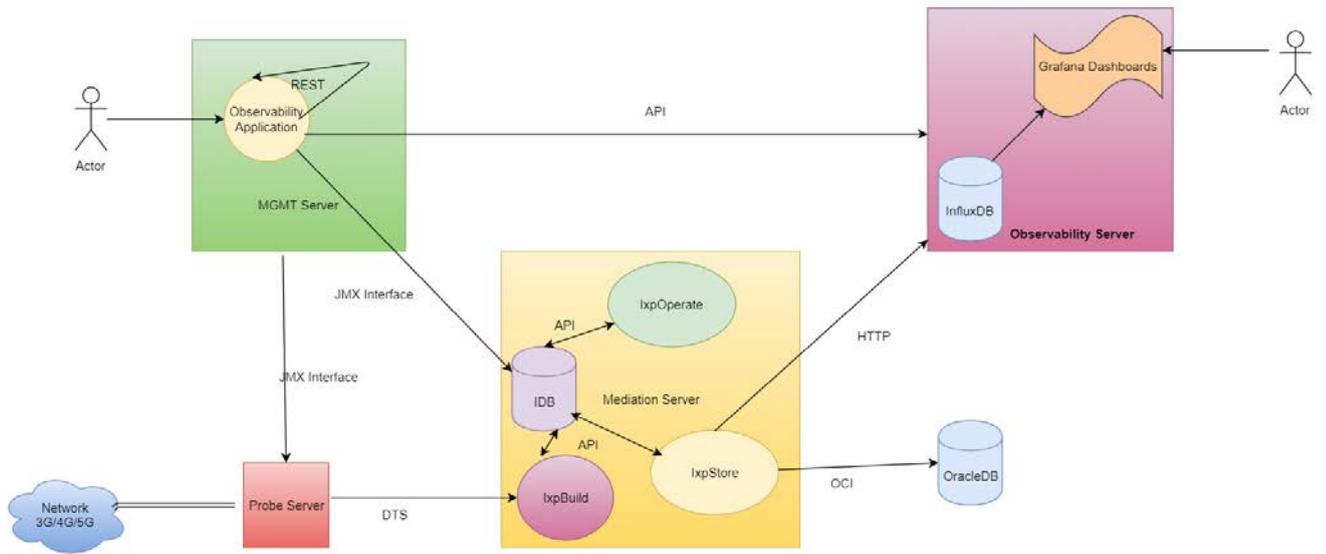

Chapter 2: Hardware Requirements

The Observability Application will be deployed on the OCPIC Management Server, so there are no additional hardware requirements for the new Observability Application.

The server hosting Grafana and InfluxDB can either be a virtual machine or bare-metal server. The hardware recommendations for the server hosting Grafana and InfluxDB are mentioned below:

- CPU: 4 vCPUs
- RAM: 4GB
- Disk Space: 200 GB or a separate partition of having 200GB of space.

Chapter 3: Software Requirements

The new Observability application shall be deployed along with the other Management server applications and there are no specific software requirements for it.

Grafana Software

- Grafana 6.5.x
- Download Link: <https://grafana.com/grafana/download>
 - v6.5.x
 - OS: RedHat & CentOS

InfluxDB Software

- InfluxDB version 1.7
- Download Link: <https://portal.influxdata.com/downloads/>
 - v1.7.x
 - OS: RedHat & CentOS

Chapter 4: Installation

The installation chapter shall provide the installation steps for the Grafana and InfluxDB open source applications.

Observability Application

The Observability Application shall be deployed along with other applications, there is no separate installation required for the new application.

Grafana Server

Pre-requisite:

- A virtual machine or server with hardware configure identified in section [Chapter 2: Hardware Requirements](#) should already be installed with Oracle Linux 7.4 or any other compatible LINUX distribution like RedHat or CentOS.
- NTP rpm should be installed and NTP should be synced with NTP server used by PIC system.

Grafana Application

1. Login to the Grafana server using root
2. Copy the downloaded Grafana rpm on the server
3. Execute rpm -Uvh <rpm file path for Grafana rpm>
4. Allow port 3000 for Grafana GUI access
 - a. `firewall-cmd --permanent --add-port=3000/tcp`

Refer URL <https://grafana.com/docs/grafana/latest/installation/configuration/> , in case of other detailed configuration for Grafana application is needed. The integration with OCPIC will work with the default configuration.

Grafana Plugins:

1. Install the Pie chart plugin
 - a. Use <https://grafana.com/grafana/plugins/grafana-piechart-panel/installation>

InfluxDB Application

1. Login to the Grafana server using root
2. Copy the downloaded InfluxDB rpm on the server
3. Execute rpm -Uvh <rpm file path for InfluxDB rpm>
4. Allow port 8086 and 8088 for InfluxDB
 - a. `firewall-cmd --permanent --add-port=8086/tcp`
 - b. `firewall-cmd --permanent --add-port=8088/tcp`

Refer <https://docs.influxdata.com/influxdb/v1.7/introduction/installation/#configuring-influxdb-oss>

5. Customize the “/etc/influxdb/influxdb.conf” file
 - a. Update [Meta] section, for the value of “dir” with the path where InfluxDB should be created
 - b. Update [Data] section, for the value of “dir” with the path where InfluxDB should be created
 - c. Update [Data] section, for the value of “wal-dir” with the path where InfluxDB should be created

```

###
### [meta]
###
### Controls the parameters for the Raft consensus group that stores metadata
### about the InfluxDB cluster.
###

[meta]
# Where the metadata/raft database is stored
dir = "/opt/data/influxdb/meta"

# Automatically create a default retention policy when creating a database.
# retention-autocreate = true

# If log messages are printed for the meta service
# logging-enabled = true

###
### [data]
###
### Controls where the actual shard data for InfluxDB lives and how it is
### flushed from the WAL. "dir" may need to be changed to a suitable place
### for your system, but the WAL settings are an advanced configuration. The
### defaults should work for most systems.
###

[data]
# The directory where the TSM storage engine stores TSM files.
dir = "/opt/data/influxdb/data"

# The directory where the TSM storage engine stores WAL files.
wal-dir = "/opt/data/influxdb/wal"

# The amount of time that a write will wait before fsyncing. A duration
# greater than 0 can be used to batch up multiple fsync calls. This is useful for slower
# disks or when WAL write contention is seen. A value of 0s fsyncs every write to the WAL.
# Values in the range of 0-100ms are recommended for non-SSD disks.
# wal-fsync-delay = "0s"

```

Note: This path should have the write permissions, otherwise InfluxDN service will not start.
Refer <https://docs.influxdata.com/influxdb/v1.7/introduction/installation/#configuration-file>

Chapter 5: Application Screens & Workflows

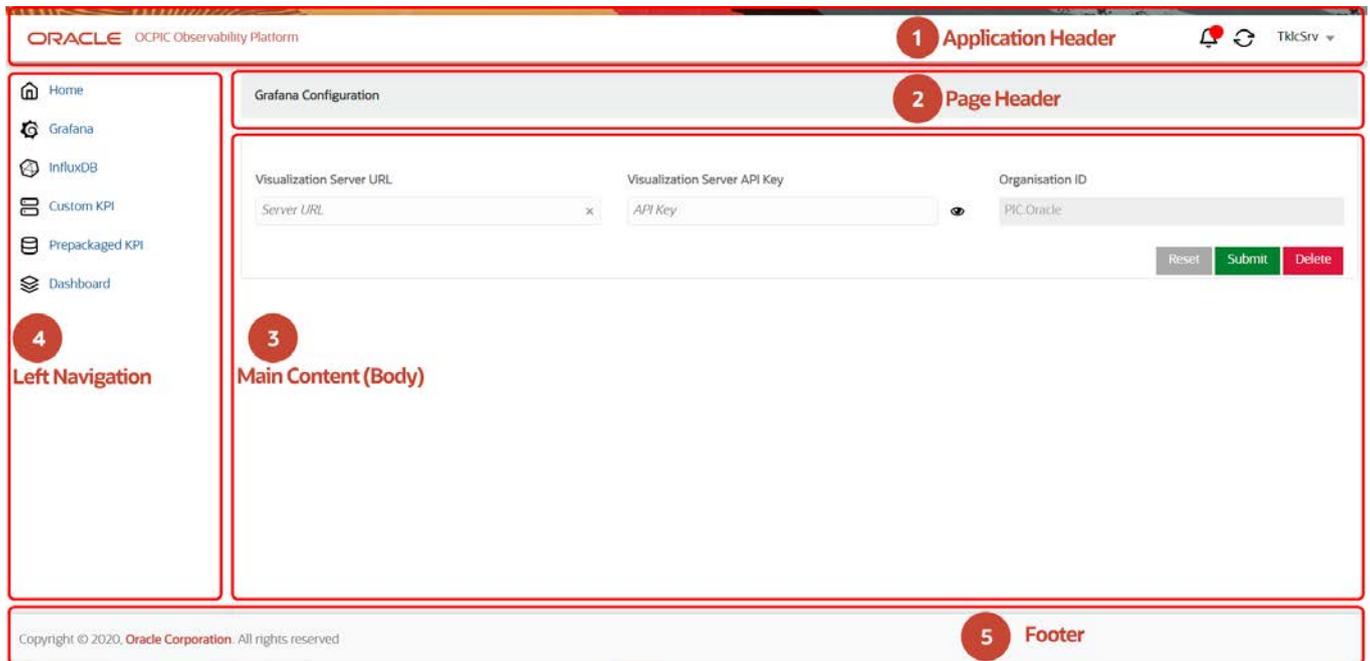


Figure 1: Landing page

Bell Notification and Apply Change

- Bell Notification will appear for any configuration modification to sync the changes to PIC-Mediation Server.
- User should perform the sync action by clicking Apply Change icon.

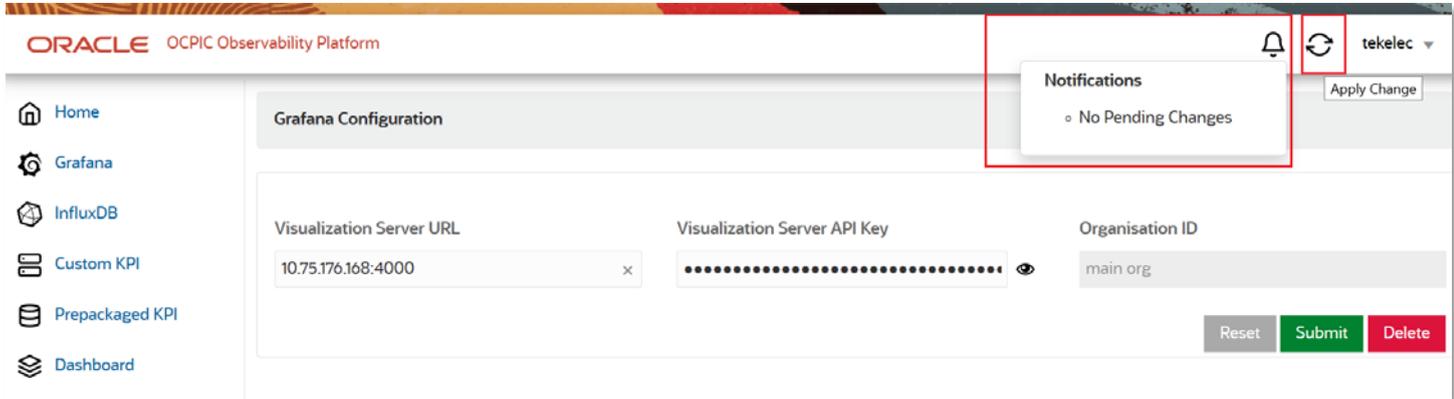


Figure 2: Bell Notification and Apply Change Action

User Details

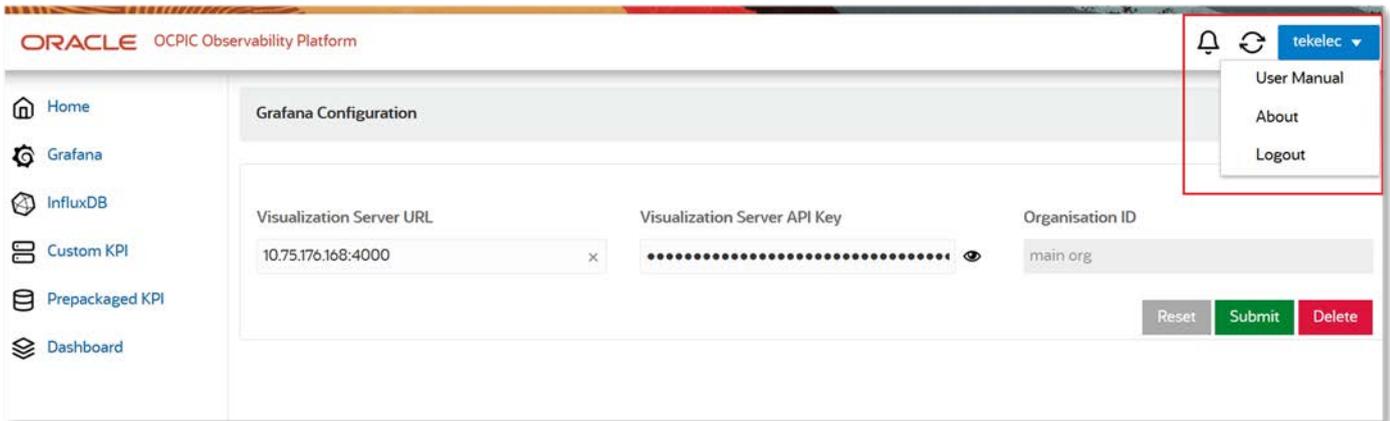


Figure :User details

Grafana Configuration

The Grafana Data source configuration shall be done from the new Observability Application. This is the first operation user will be required to perform. After the Grafana data source has been configured user shall be navigated to InfluxDB Configuration.

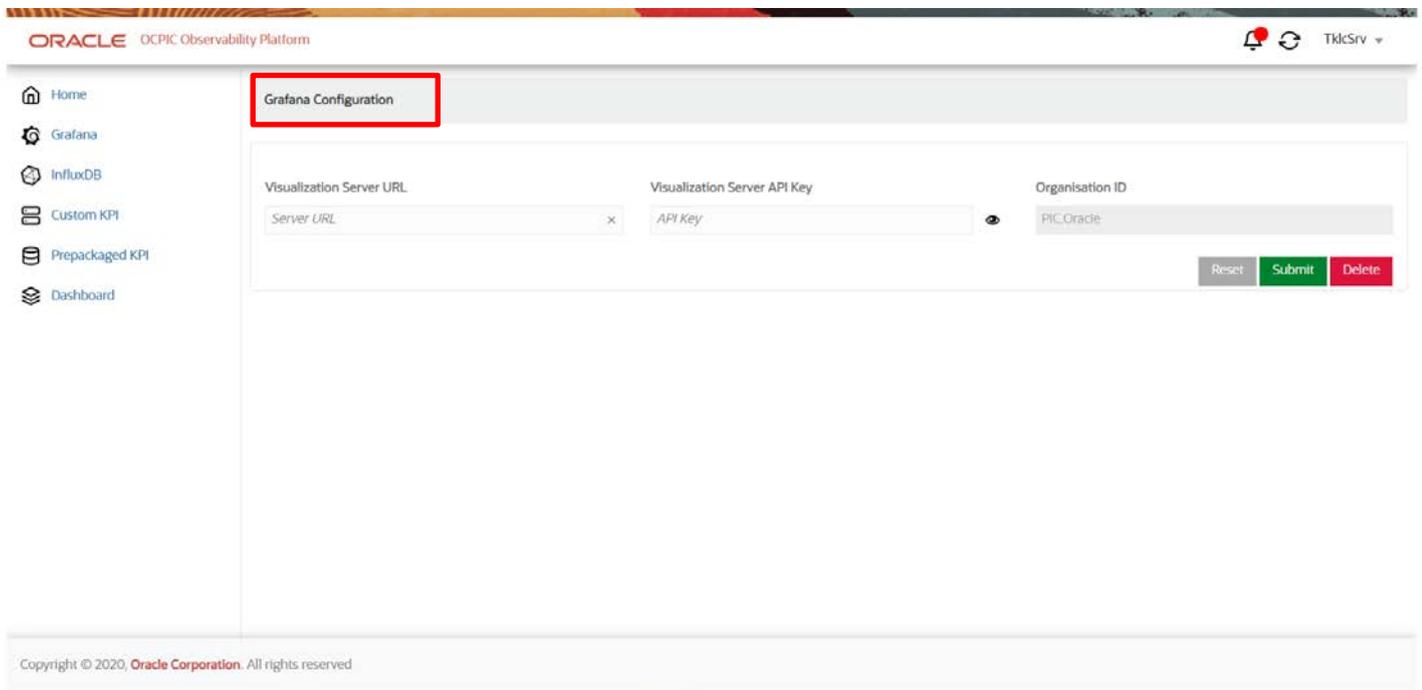


Figure 3:Grafana Configuration

Add Grafana Server

The screenshot shows the 'Grafana Configuration' page in the Oracle OCPIC Observability Platform. The page has a left-hand navigation menu with options: Home, Grafana, InfluxDB, Custom KPI, Prepackaged KPI, and Dashboard. The main content area is titled 'Grafana Configuration' and contains three input fields: 'Visualization Server URL' with the value '10.75.176.168:4000', 'Visualization Server API Key' with a masked value and an 'eye/show' button, and 'Organisation ID' which is currently empty. Below the API key field, a sample key is displayed: 'eyJrIjoic3VrRnBaa3FNTmNaQndMmN3aXhFWWFoZTBGRkhWDELClJlIjoibWFiYmVvcmlLCjJpZC16NnU='. At the bottom right of the configuration area are three buttons: 'Reset', 'Submit', and 'Delete'. The footer of the page reads 'Copyright © 2020, Oracle Corporation. All rights reserved'.

Figure 4: Add Grafana Server

- Provide IP Address and Port of the Grafana Server in the *Visualization Server URL*
- Provide API key in the *Visualization Server API Key*. The API key can be generated using the procedure defined in [Appendix C: How to generate API Key in Grafana](#)
- *Organization ID* will be automatically filled after configuration saved successfully by clicking Submit button.
- The *eye/show* button beside the *Visualization Server API Key* field will help the user to view the API key.

Edit Grafana Server

ORACLE OCPIC Observability Platform

tekelec

Home
Grafana
InfluxDB
Custom KPI
Prepackaged KPI
Dashboard

Grafana Configuration

Visualization Server URL: 10.75.176.168:4000

Visualization Server API Key: [masked]

Organisation ID: main.org

Reset Submit Delete

Copyright © 2020, Oracle Corporation. All rights reserved

Figure 5:Edit Grafana Server

- Provide IP Address and Port of the Grafana Server in the *Visualization Server URL*
- Provide API key in the *Visualization Server API Key*. The API key can be generated using the procedure defined in [Appendix C: How to generate API Key in Grafana](#)
- *Organization ID* will be automatically filled after configuration saved successfully by clicking Submit button.
- The *eye/show* button beside the *Visualization Server API Key* field will help the user to view the API key.

Note: In case user is only modifying the API key, then the API key must belong to the same organization.

Delete Grafana Server

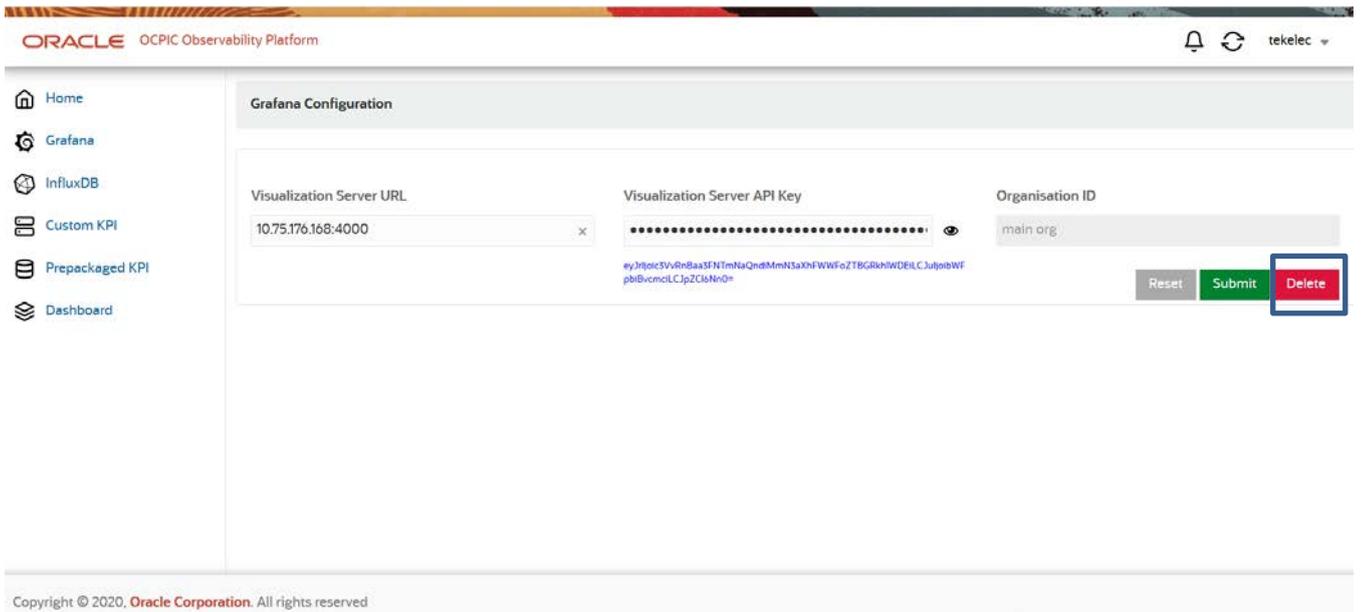


Figure 6:Delete Grafana Server

- Grafana Server configuration shall be deleted on clicking Delete button in case there is no dependent configuration for InfluxDB , Custom KPI and /or Pre-packaged KPI.
- The deletion shall fail if there are any dependent configurations remaining.

Note: There shall be no deletion of Dashboards created by the user manually on the Grafana server.

Influx DB Configuration

The user shall be required to configure the InfluxDB data source as the second step. Multiple data sources (upto 20) can be added.

Either clicking on Submit button on Grafana Configuration or clicking on the InfluxDB Configuration in the side menu bar, user will be redirected to the InfluxDB Configuration page.

Influx Server Configuration

Add Influx Server


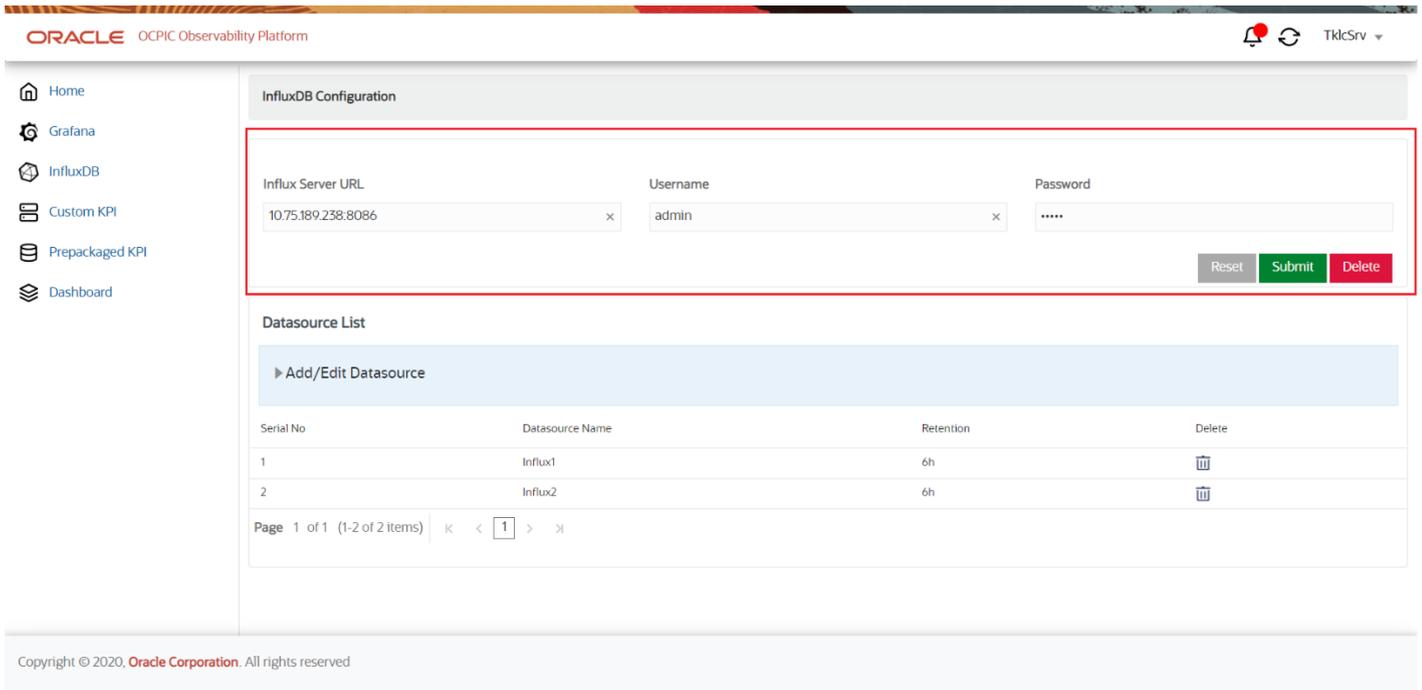


Figure 7: Add Influx Server

- **User can add only one Influx Server**
- To Add Influx Server - User has to enter **Influx Server URL** <server_ip : influxdb_port> | **Username** | **Password** and click **Submit** Button.

Edit Influx Server

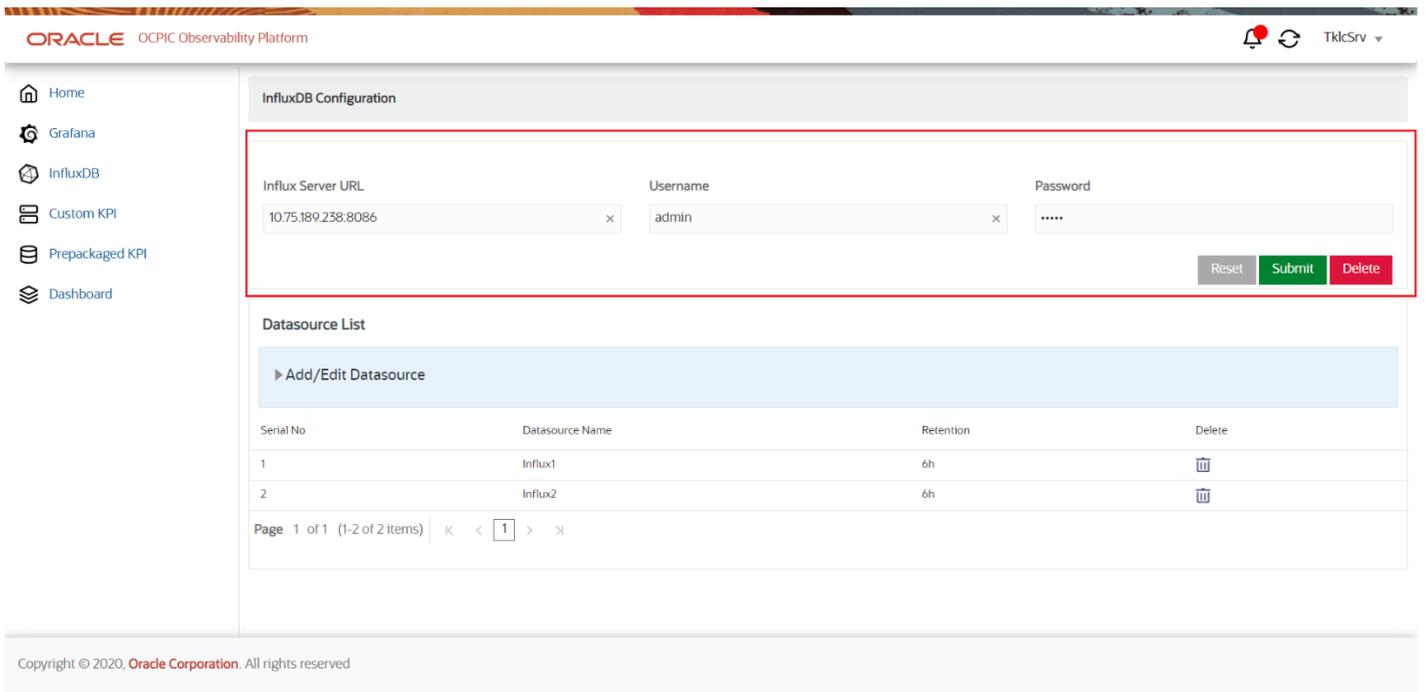

ORACLE OCPIC Observability Platform

Home Grafana InfluxDB Custom KPI Prepackaged KPI Dashboard

InfluxDB Configuration

Influx Server URL: 10.75.189.238:8086 Username: admin Password:

Reset Submit Delete

Datasource List

► Add/Edit Datasource

Serial No	Datasource Name	Retention	Delete
1	Influx1	6h	
2	Influx2	6h	

Page 1 of 1 (1-2 of 2 items) < 1 >


Copyright © 2020, Oracle Corporation. All rights reserved

Figure 8:Edit Influx Server

- To Edit Influx Server - User can update *Influx Server URL* <server_ip : influxdb_port> | *Username* | *Password* and click *Submit* Button.

Note: Any change in Influx Server URL will affect all the datasources as well in Grafana.

Delete Influx Server

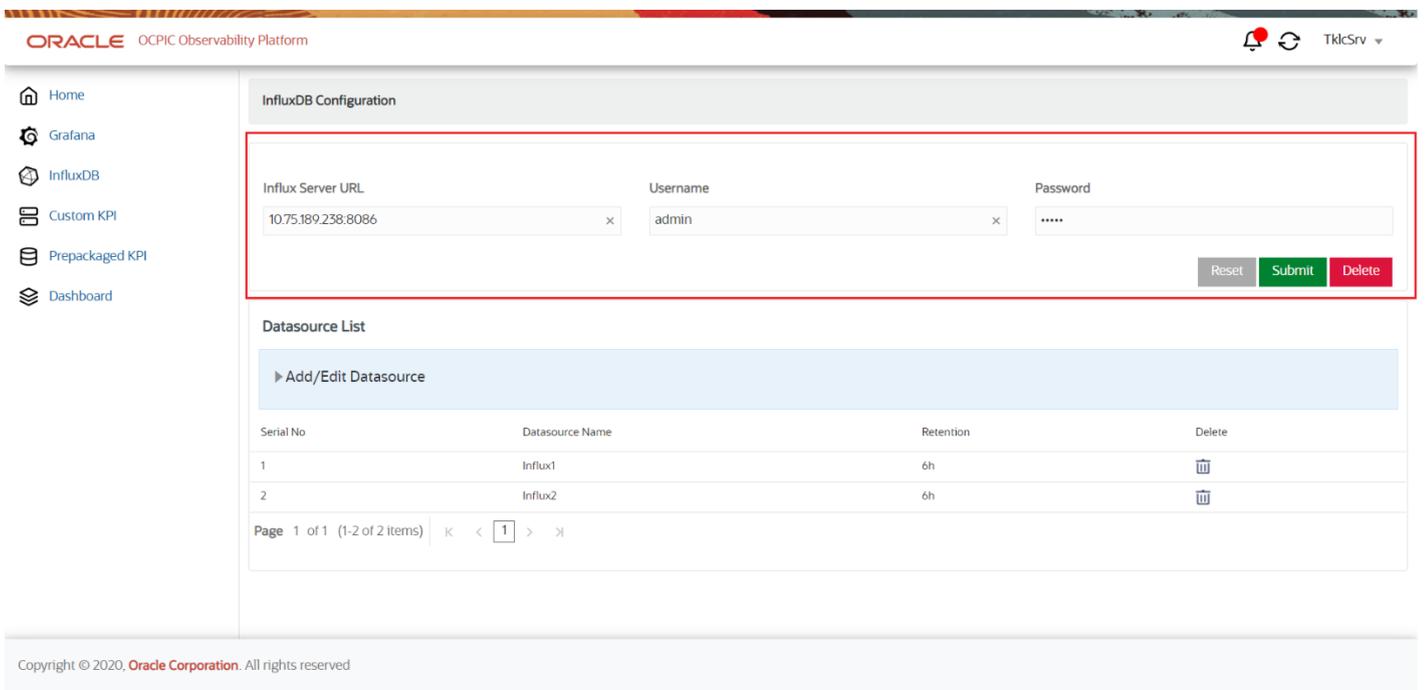

ORACLE OCPIC Observability Platform

Home Grafana InfluxDB Custom KPI Prepackaged KPI Dashboard

InfluxDB Configuration

Influx Server URL: 10.75.189.238:8086 Username: admin Password:

Reset Submit Delete

Datasource List

► Add/Edit Datasource

Serial No	Datasource Name	Retention	Delete
1	Influx1	6h	
2	Influx2	6h	

Page 1 of 1 (1-2 of 2 items) < 1 >

Copyright © 2020, Oracle Corporation. All rights reserved

Figure 9:Delete Influx Server

- To Delete Influx Server - User need to click *Delete* Button.

- User will be asked for confirmation and Bell Notification will appear to sync the changes with PIC-Mediation.

Datasource Configuration

Add Datasource

The screenshot displays the 'InfluxDB Configuration' interface. At the top, there are navigation links for Home, Grafana, InfluxDB, Custom KPI, Prepackaged KPI, and Dashboard. The main content area is divided into two sections:

InfluxDB Configuration: This section contains three input fields: 'Influx Server URL' (with value 10.75.189.238:8086), 'Username' (with value admin), and 'Password' (masked with dots). There are 'Reset', 'Submit', and 'Delete' buttons at the bottom right of this section.

Datasource List: This section is highlighted with a red border. It includes an 'Add/Edit Datasource' form with 'Datasource Name' (Influx3) and 'Retention Time' (9 Hrs) fields, and 'Reset' and 'Submit' buttons. Below the form is a table listing existing datasources:

Serial No	Datasource Name	Retention	Delete
1	Influx1	6h	
2	Influx2	6h	

At the bottom of the page, there is a footer: 'Copyright © 2020, Oracle Corporation. All rights reserved.'

Figure 10: Add Datasource

- User can add upto 20 Datasources.
- User need to provide *Datasource Name* | *Retention Time* and click Submit to add datasource.
- User can select different Retention time while adding the Datasource from the Retention Time Dropdown field. This value determines how long InfluxDB stores data. Data older than the duration are automatically dropped from the database.

Edit Datasource

InfluxDB Configuration

Influx Server URL: 10.75.189.238:8086
Username: admin
Password:

Reset Submit Delete

Datasource List

Add/Edit Datasource

Datasource Name: Influx3
Retention Time: 9 Hrs

Reset Submit

Serial No	Datasource Name	Retention	Delete
1	Influx1	6h	
2	Influx2	6h	

Page 1 of 1 (1-2 of 2 items) < 1 >

Copyright © 2020, Oracle Corporation. All rights reserved.

Figure 11:Edit Datasource

- User need to provide existing *Datasource Name* | *Retention Time* and click Submit to update Datasource Retention Time only.
- Datasource Name can be found out using below method:
 - User can provide existing Datasource Name from the tabular list displayed on the screen.
 - The list will be available as a dropdown, once user will start typing name of Datasource.
- User can select different Retention time while adding the Datasource from the Retention Time Dropdown field. This value determines how long InfluxDB stores data. Data older than the duration are automatically dropped from the database.

Delete Datasource

ORACLE OCPIC Observability Platform

Home Grafana InfluxDB Custom KPI Prepackaged KPI Dashboard

InfluxDB Configuration

Influx Server URL: 10.75.189.238:8086 Username: admin Password:

Reset Submit Delete

Datasource List

Add/Edit Datasource

Datasource Name: Influx3 Retention Time: 9 Hrs

Reset Submit

Serial No	Datasource Name	Retention	Delete
1	Influx1	6h	
2	Influx2	6h	

Page 1 of 1 (1-2 of 2 Items) < 1 >

Copyright © 2020, Oracle Corporation. All rights reserved

Figure 12: Delete Datasource

- User can delete the existing Datasource by clicking the *Delete icon* corresponding to the datasource.
- Datasource can only be deleted if it doesn't have any dependent configuration (Custom or pre-packaged KPI).

Custom KPI

Note: If the original KPI is modified, then corresponding custom KPI should be deleted and re-created again.

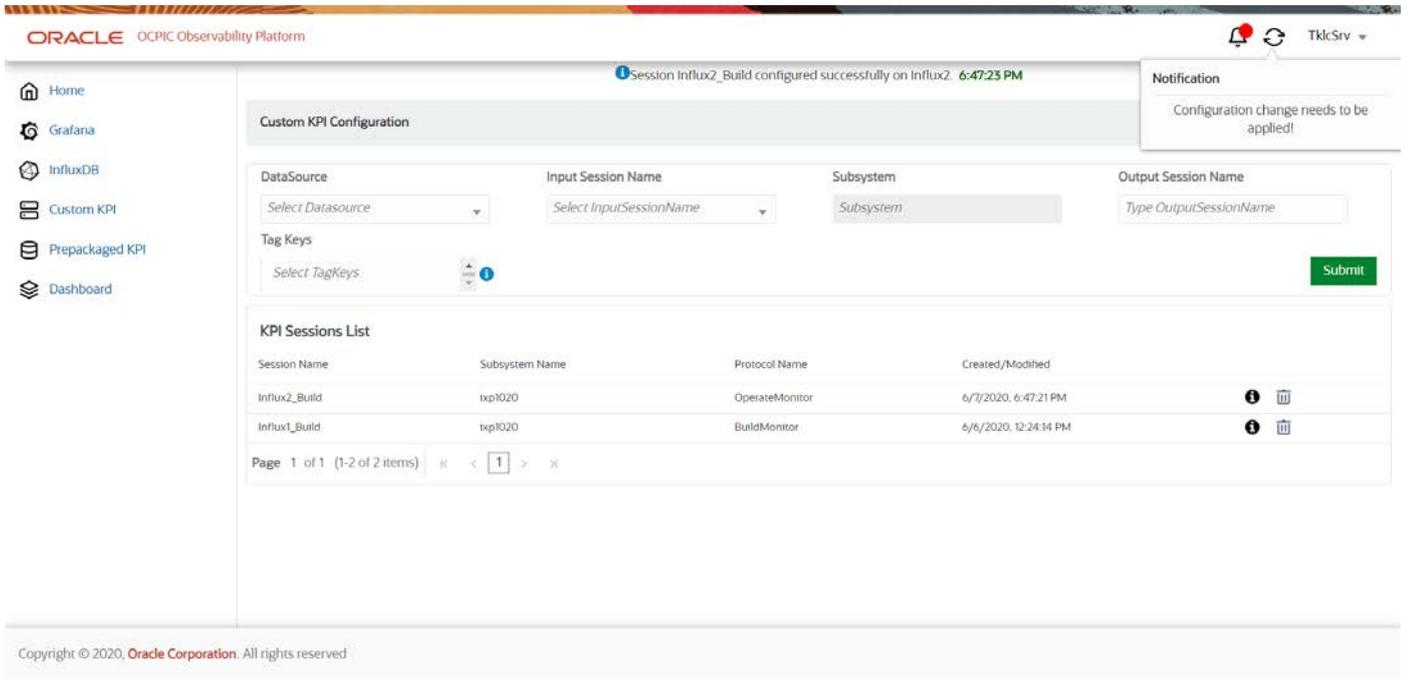


Figure 13: Custom KPI Creation

- After clicking on the Custom KPI Configuration on the side menu-bar, User will be navigated to Custom KPI Configuration screen.
- In Custom KPI Configuration screen User can create KPI Sessions by selecting *DataSource* | *Input Session Name* | *Tag Key(s)* and enter *Output Session Name*.
- *Subsystem* field is not editable for user and will be auto-populated based on selected *Input Session Name*.
- All created session(s) will be displayed in a tabular format under **KPI Session List**.

Note: User can create upto 100 sessions including (Custom and Pre-packaged) using Observability Application.

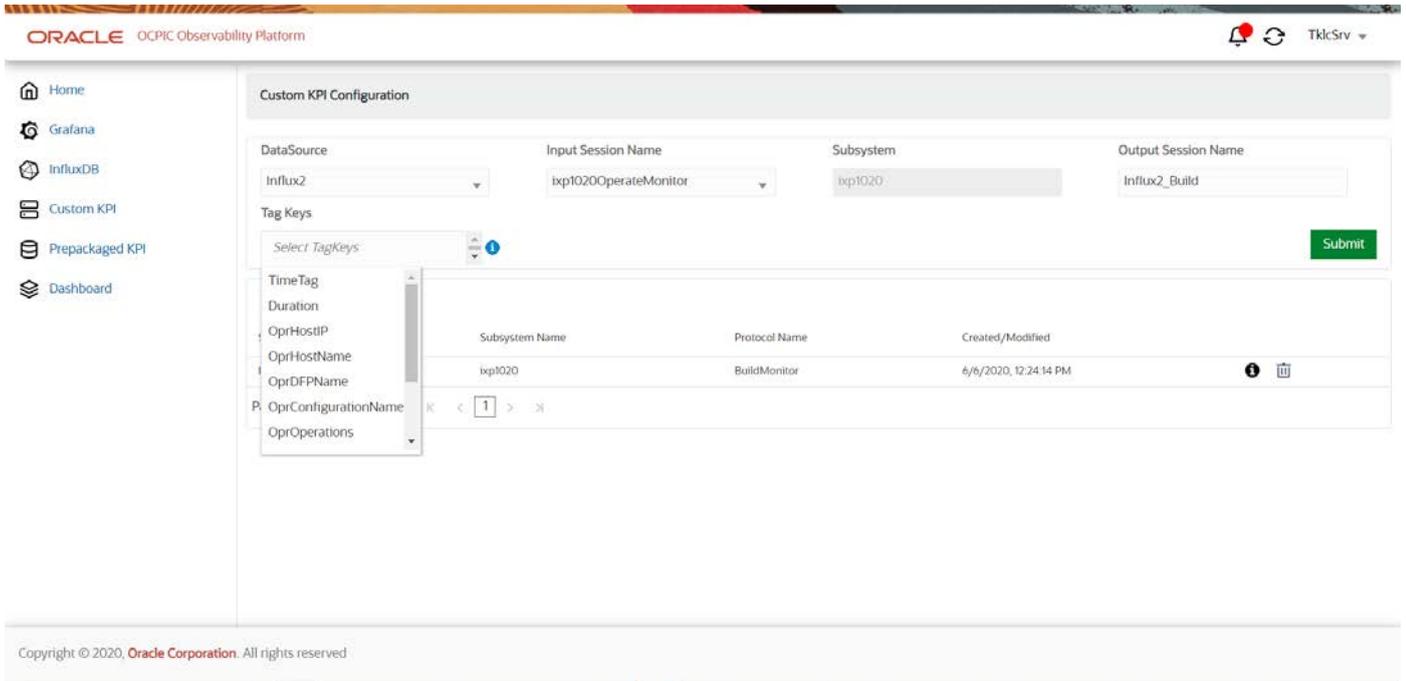


Figure 14:Tag Key(s) Selection

- In this screen User can select either single or multiple Tag Keys form the *Tag Keys* dropdown.
- Based on the *Input Session Name*, the *TAG Keys* will populate in the dropdown.

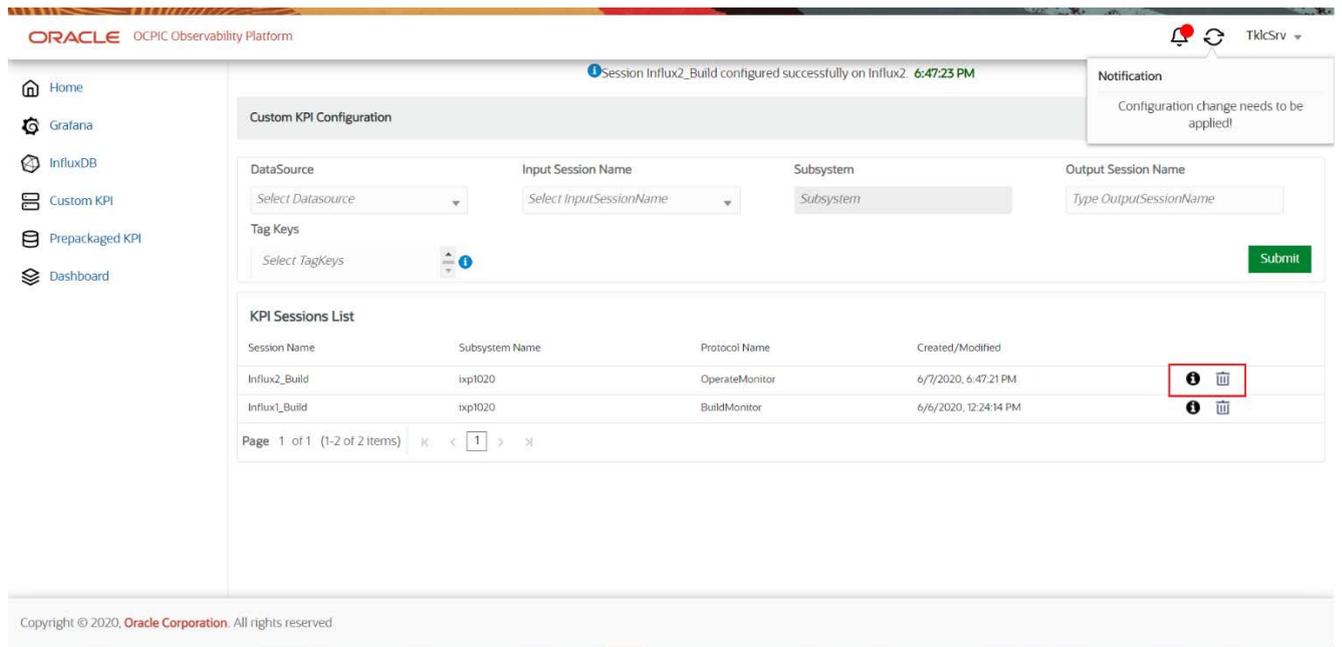


Figure 15:Delete Custom KPI

- To delete any KPI Session from the **KPI Session List**, user need to click on the *Delete icon* as highlighted in the above screen capture.
- After clicking on the Delete button, the Pop-up alert will display for *Confirmation*.
- User also has the option to view TAG key(s) details by clicking in the *information / i icon* corresponding to the *KPI Session* as highlighted in the above screen capture.

Pre-Packaged KPI Configuration

Pre-packaged KPI is the combination of KPI and the respective pre-defined dashboard. The user should select the dashboard and input session. On submit, the KPI will be generated by OCPIC-Mediation and the corresponding dashboard will be pushed to the Grafana server.

On Apply change, the mediation server will start writing into the output session on InfluxDB.

Note: Only one pre-packaged dashboard is allowed for the input session of the same dictionary.

ORACLE OCPIC Observability Platform

Dashboard SMS MT EFFICIENCY created successfully, 6:52:00 PM

Notification
Configuration change needs to be applied!

Pre-Packaged KPI Configuration

Generation: Builder Name: Dashboard: DataSource:

Input Session Name: Subsystem:

KPI Sessions List

KPI Name	Output Session	Input Session	Subsystem Name	Protocol Name	Created/Modified
SMS MD EFFICIENCY	IFXP_MAP_SMSMD_EFFICIENCY	map2_idr_sess	ixp1020	11616 IFXP_MAP_SMSMD_EFFICIENCY	6/6/2020, 12:23:45 PM
SMS MT EFFICIENCY	IFXP_MAP_SMSMT_EFFICIENCY	map2_idr_sess	ixp1020	11680 IFXP_MAP_SMSMT_EFFICIENCY	6/7/2020, 6:51:58 PM
ISUP ANSI QOS	IFXP_ISUP_ANSI_QOS	isup_ansi_cdr_sess	ixp1020	11643 IFXP_ISUP_ANSI_QOS	6/6/2020, 12:26:33 PM

Page 1 of 1 (1-3 of 3 items)

Copyright © 2020, Oracle Corporation. All rights reserved

- After clicking on the Pre-Packaged KPI Configuration on the side menu-bar, User will be navigated to Pre-Packaged KPI Configuration screen.
- In this screen, User need to select **Generation** → **Builder Name** and **Dashboard** and then User need to select **Input session Name** which will be populated based on the selected Builder Name.
 - **Generation:** Protocol family.
 - **Builder Name:** Dictionary of builders supported for the selected Generation.
 - **Dashboard:** Combination of different KPIs and Visualization. For more info Refer [KPI Description](#)
- User need to select the Datasource on which Pre-packaged configuration should be applied.
- **Subsystem** field is disabled and will be auto-populate based on the **Input Session Name**.

Note: User can create upto 100 sessions including (Custom and Pre-packaged) using Observability Application.

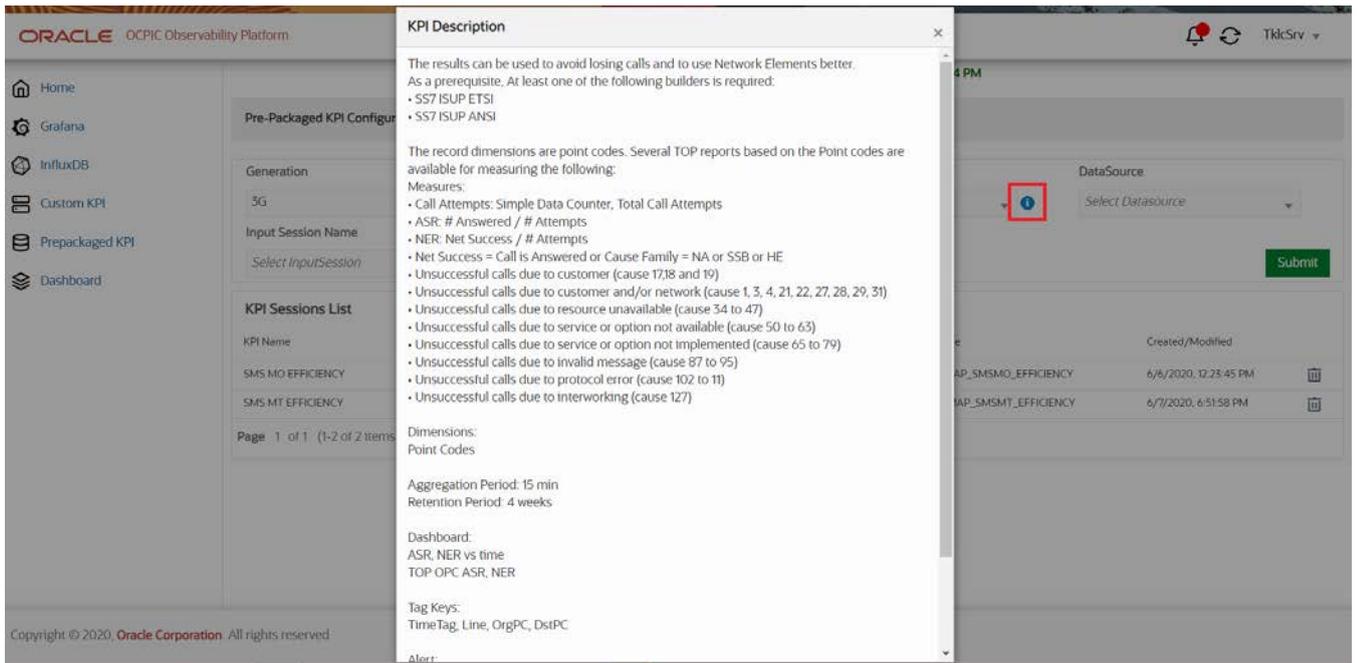


Figure 16:Pre-packaged KPI Description

- User need to click on the “information / i icon” as highlighted in the above screen capture to view the dashboard description.

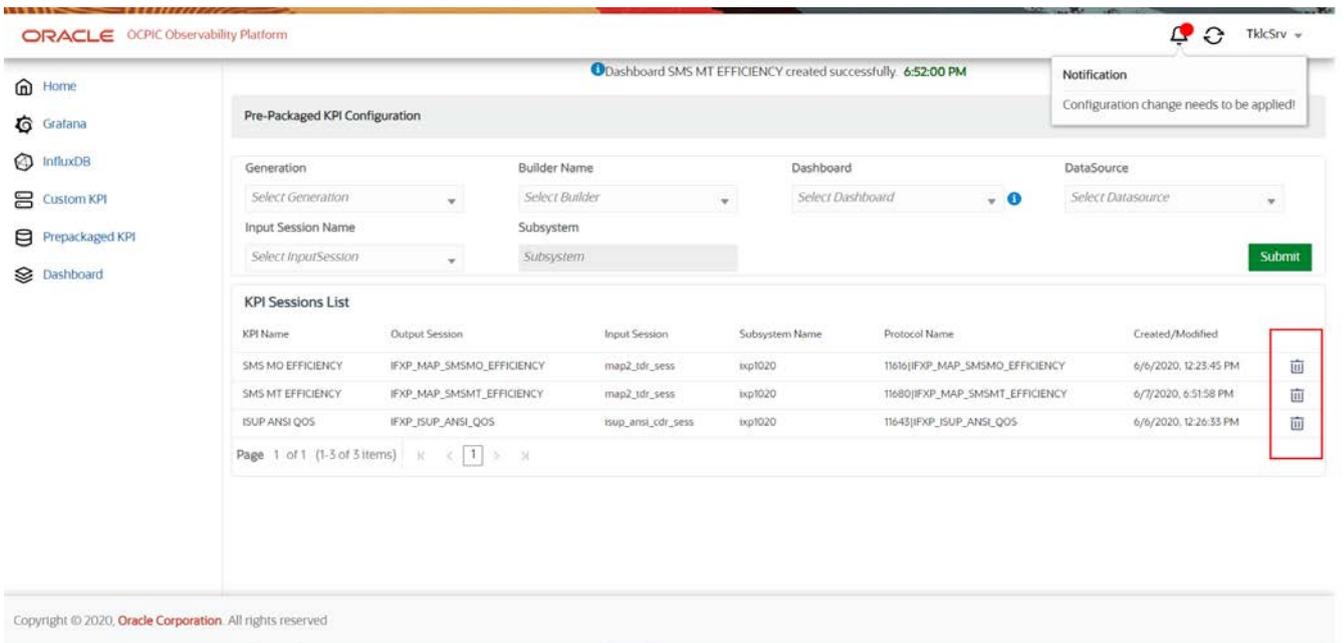


Figure 17:Delete Pre-packaged KPI

- To delete any Pre-packaged KPI session from the **KPI Session List**, user need to click on the **Delete icon** as highlighted in the above screen capture.
- After clicking on the Delete button, the Pop-up alert will display for **Confirmation**.

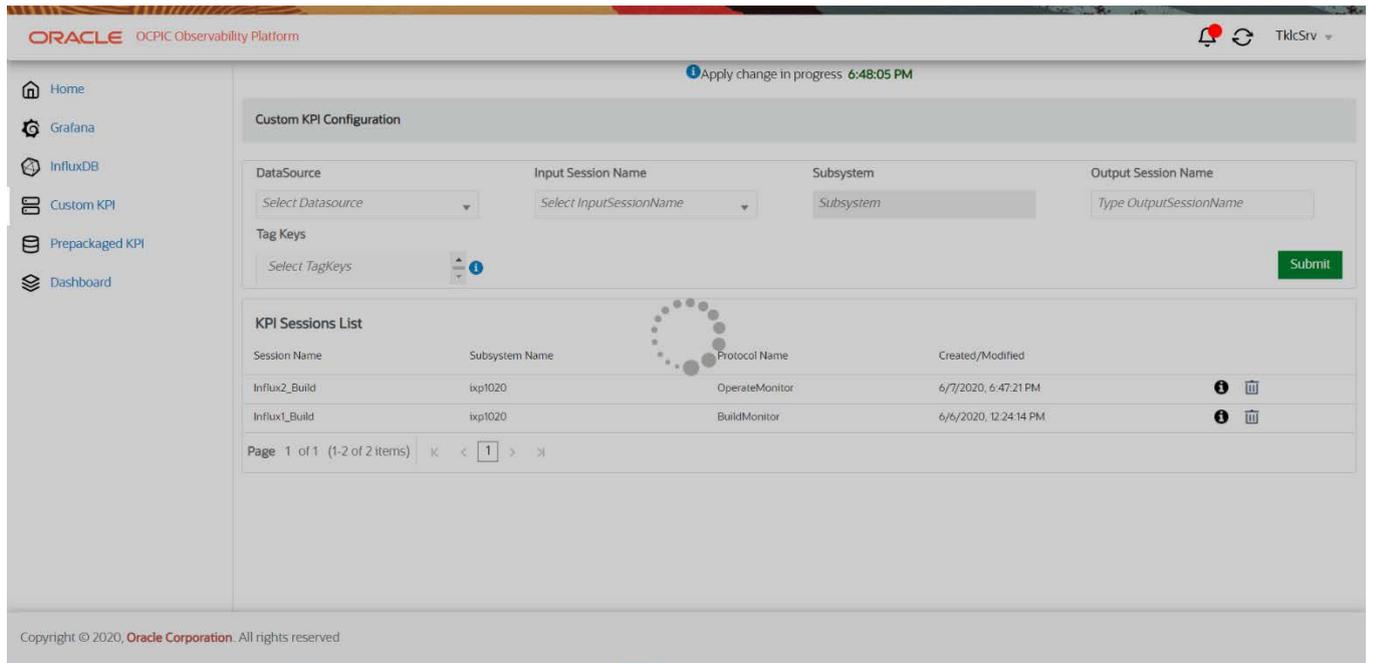


Figure 18:Apply Change

- After getting the Notification, User has to click on the *Apply Change* icon on the *Top right corner section in the header* to sync the configuration with Mediation server.

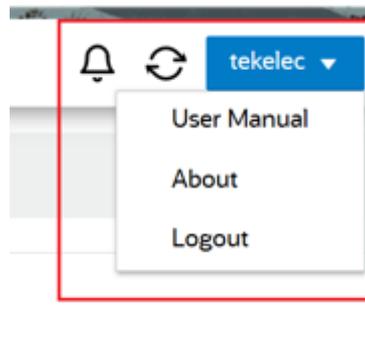


Figure 19:User Menu

- By default, the User details panel will display the Current Logged-in User Name.
- User need to click on the User Menu dropdown to access :
 - a. Application User Guide from User Manual.
 - b. Application Version Information from About.
 - c. Logout from the application using Logout.

Supported Resolution

The supported resolutions are given below:

Browser	Supported Resolution
Internet Explorer	150%
Chrome	100%
Firefox	100%
EDGE	100%

Chapter 6: Troubleshooting

Grafana Troubleshooting

Refer the below URL for any Grafana server-specific troubleshooting.

<https://grafana.com/docs/grafana/latest/installation/troubleshooting/>

<https://grafana.com/docs/grafana/latest/administration/cli/>

InfluxDB Troubleshooting

Refer the below URL for any InfluxDB server-specific troubleshooting

<https://docs.influxdata.com/influxdb/v1.7/troubleshooting/>

Browser Settings

Auto Refresh in Internet Explorer

The Observability Application might appear to function incorrectly if you use webpage caching in Internet Explorer 11. You must disable caching if you want to use this browser to access the Observability Application. Please refer the following link to disable the caching:

[Disable Webpage Caching in IE11](#)

Chapter 7: Appendices

Appendix A: My Oracle Support

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select 2 for New Service Request
2. Select 3 for Hardware, Networking and Solaris Operating System Support
3. Select 2 for Non-technical issue

You will be connected to a live agent who can assist you with MOS registration and provide Support Identifiers. Simply mention you are a Tekelec Customer new to MOS.

MOS is available 24 hours a day, 7 days a week.

Appendix B: Customize Pre-packaged Reports

It is recommended not to customize the pre-packaged reports. However, in case it is required then the following procedure can be used:


Note: Only new Line(s) can be added in the FSE config and no column addition/deletion/modification should be done. No modification should be done to the file name of the report.

- The report is already configured:
 1. Delete the configured report e.g ISUP ACCOUNTING
 2. Update the report configuration file at /opt/nsp/observer/ISUP ACCOUNTING.txt
Look for "FSECONTENT" in the configuration file, add one or more Lines
for example, following a new line can be added
SECTION:LINE:3:PASS:30:0:2
NAME:DataRow
 3. Save the file and reload the Observability application
 4. Configure the updated report.

- The report is not yet configured:
 1. Update the report configuration file at /opt/nsp/observer/ISUP ACCOUNTING.txt
Look for "FSECONTENT" in the configuration file, add one or more Lines
for example, following the new line can be added
SECTION:LINE:3:PASS:30:0:2
NAME:DataRow
 2. Save the file and reload the Observability application
 3. Configure the updated report.

Appendix C: How to generate API Key in Grafana

1. Log in as an admin user in Grafana
2. `http://<server_ip>:3000`
3. Create the API key using the following screenshot

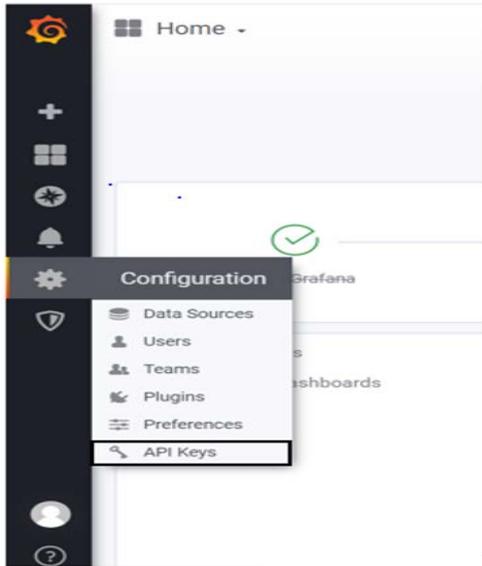

4. Add API Key button
5. Give any API Key name
6. Give the role of admin and Time to live as "10y"