

JD Edwards EnterpriseOne

Portal Reference Guide for Oracle WebCenter

9.2

Copyright © 2011, 2022, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface	i
1 Documentation Accessibility	1
Documentation Accessibility	1
2 Understanding This Guide	3
Using this Guide	3
Accessing Minimum Technical Requirements	3
EnterpriseOne Portal Solutions Overview	3
3 Oracle WebCenter Portal	5
Understanding WebCenter Portal Server	5
JD Edwards EnterpriseOne Features Not Supported with Oracle WebCenter Portal (Release 9.2.0.5)	5
Installing Oracle WebCenter Portal	6
Configuring the External LDAP Server	24
Configuring Oracle HTTP Server for WebCenter Portal	30
4 Understanding WSRP	33
Understanding WSRP	33
5 Administering WSRP with Oracle WebCenter 11g	35
Configuring Oracle WebCenter Portal for EnterpriseOne	35
Registering the WSRP Producer	39
Adding Portlets from the WSRP Producer to a Page	46
6 Appendix A - Create Database Schemas with Repository Creation Utility	57
Create Database Schemas with Repository Creation Utility	57
7 Appendix B - Installing WebLogic Server	65
Prerequisites	65

Installing the WebLogic Server

65

8 Glossary

75

B2B

75

B2C

75

B2E

75

web service

75

WSRP

75

WSRP Consumer

75

WSRP Producer

76

Preface

Welcome to the JD Edwards EnterpriseOne documentation.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Information

For additional information about JD Edwards EnterpriseOne applications, features, content, and training, visit the JD Edwards EnterpriseOne pages on the JD Edwards Resource Library located at:

<http://learnjde.com>

Conventions

The following text conventions are used in this document:

Convention	Meaning
Bold	Boldface type indicates graphical user interface elements associated with an action or terms defined in text or the glossary.
<i>Italics</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
Monospace	Monospace type indicates commands within a paragraph, URLs, code examples, text that appears on a screen, or text that you enter.
> Oracle by Example	Indicates a link to an Oracle by Example (OBE). OBEs provide hands-on, step-by-step instructions, including screen captures that guide you through a process using your own environment. Access to OBEs requires a valid Oracle account.

1 Documentation Accessibility

Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible to all users, including users that are disabled. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site at <http://www.oracle.com/accessibility/>.

Accessibility of Code Examples in Documentation

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

Accessibility of Links to External Web Sites in Documentation

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

TTY Access to Oracle Support Services

To reach AT&T Customer Assistants, dial 711 or 1.800.855.2880. An AT&T Customer Assistant will relay information between the customer and Oracle Support Services at 1.800.223.1711. Complete instructions for using the AT&T relay services are available at the AT&T web site. After the AT&T Customer Assistant contacts Oracle Support Services, an Oracle Support Services engineer will handle technical issues and provide customer support according to the Oracle service request process.

2 Understanding This Guide

Using this Guide

The JD Edwards EnterpriseOne Tools Portal Reference for Oracle Web Center Guide covers the Oracle WebCenter technology.

The *JD Edwards EnterpriseOne Tools Portal Reference for Oracle Web Center Guide* is meant to be used to supplement the use of the Oracle WebCenter Spaces with Oracle JD Edwards portlets and WSRP technology. This guide is not meant to be read front to back. Instead, the user should skip to the necessary parts and use them with other guides that more fully detail the various install processes. The necessary supplementary guides include:

- *JD Edwards EnterpriseOne Tools Server Manager Guide*
- *Installing Oracle Fusion Middleware WebCenter 11g with JD Edwards EnterpriseOne Red Paper*

Accessing Minimum Technical Requirements

Customers must conform to the supported platforms for the release as detailed in the Certifications for JD Edwards EnterpriseOne. In addition, JD Edwards EnterpriseOne may integrate, interface, or work in conjunction with other Oracle products. Refer to the following link for cross-reference material in the Program Documentation for Program prerequisites and version cross-reference documents to assure compatibility of various Oracle products:

<http://www.oracle.com/corporate/contracts/index.html>

Access the Certifications from My Oracle Support (<https://support.oracle.com>) by searching for this product from the Certification tab:

JD Edwards EnterpriseOne Portal

EnterpriseOne Portal Solutions Overview

EnterpriseOne Portal supports only the WSRP solution on these Portal Servers:

- Oracle WebCenter Portal
- IBM WebSphere Portal with WebSphere Application Server

Depending on the combination of JD Edwards EnterpriseOne Applications and Tools Release levels, the availability of the different portal solutions is depicted in the following table:

JD Edwards EnterpriseOne Applications Release Level	WSRP
9.1	WebCenter 11g and WLS 10.3.5+

JD Edwards EnterpriseOne Applications Release Level	WSRP
9.2	WebCenter 11g and WLS 10.3.6+

X = supported

3 Oracle WebCenter Portal

Understanding WebCenter Portal Server

Prerequisites

- Install WebCenter Database Schemas (See *Create Database Schemas with Repository Creation Utility*).
- Install WebLogic Server (See *Installing WebLogic Server*).

Important: the WebCenter database schemas must be created and the WebLogic Server must be installed before you install Oracle WebCenter Portal.

Oracle WebCenter Portal 11.1.1.8.0 with Bundle Patch 5 support starts with:

- JD Edwards EnterpriseOne Tools Release 9.1.5 Update 0
- JD Edwards EnterpriseOne Tools Release 9.1.4.Update 6
- JD Edwards EnterpriseOne Tools Release 9.2.0.Update 0

JD Edwards EnterpriseOne Features Not Supported with Oracle WebCenter Portal (Release 9.2.0.5)

The following JD Edwards EnterpriseOne Web client features are not supported with Oracle WebCenter Portal:

- List View Grid Format
- Carousel
- EnterpriseOne Pages
- Composed EnterpriseOne Pages
- Composite Application Framework
- Advanced Media Object Attachments (Release 9.2.1)
- Design mode for Personal Forms (Release 9.2.1)
- EnterpriseOne Search (Release 9.2.1.2)
- Contextual Conversations, Contextual Documents, and User Conversations (Release 9.2.1.2)
- Task Search (Release 9.2.1.4)
- Subscriptions to Notifications (Release 9.2.2)
- Renaming and resetting column headers for Table View Grid Format in design mode (Release 9.2.2.4)
- Design mode for Form Extensions (Release 9.2.2.4)

Installing Oracle WebCenter Portal

When you install the WebCenter components on your machine, be sure to enter the correct data (machine name, ports, and so on) for your configuration. When you download the software from the Oracle Software Cloud, note the directories to which you downloaded the software and replace the directory location specified in this chapter with your directory locations. Be sure to install the executable files for your platform.


Use these steps to install Oracle WebCenter Portal 11.1.1.8.0.

1. Download and unzip the WebCenter installation file:

Oracle WebCenter Portal 11g (11.1.1.8.0), part number = V38995-01

2. Execute the install process from the Disk1 folder:
 - o On Windows: *setup.exe* with **Run as administrator** option
 - o On UNIX: *./runInstaller* as a non-root user
3. Enter the JRE location when prompted.
4. Review the Welcome page information. Click **Next**.
5. Select your **Software Updates** option.

6. The installer performs prerequisite checks.

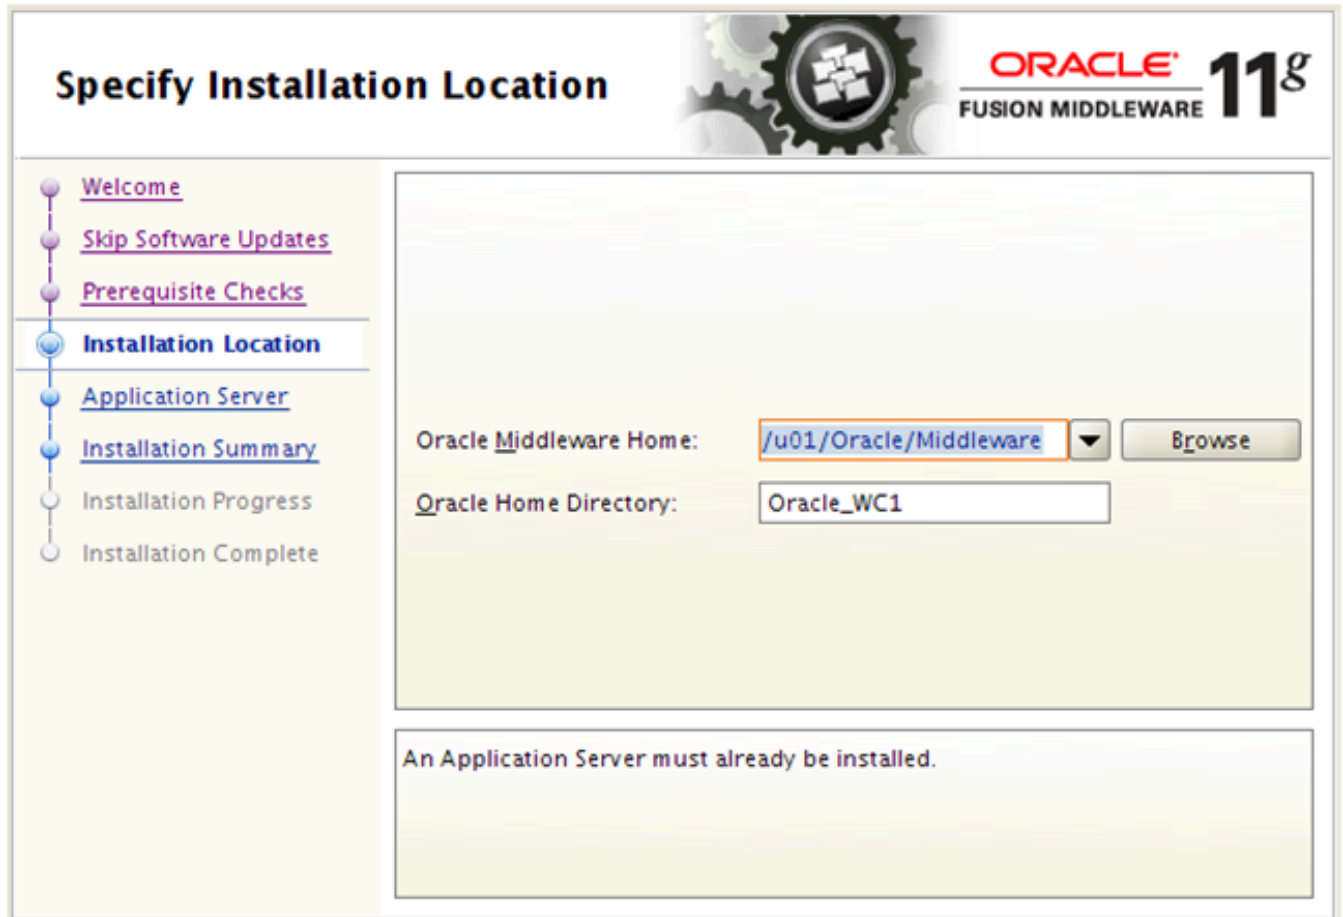

Specify Installation Location

ORACLE 11^g
FUSION MIDDLEWARE

- Welcome
- Skip Software Updates
- Prerequisite Checks
- Installation Location**
- Application Server
- Installation Summary
- Installation Progress
- Installation Complete

Oracle Middlewre Home: /u01/Oracle/Middleware

Oracle Home Directory: Oracle_WC1

An Application Server must already be installed.

7. Enter a Middleware Home and a WebCenter Home Directory.



Application Server

ORACLE 11g
FUSION MIDDLEWARE

- [Welcome](#)
- [Skip Software Updates](#)
- [Prerequisite Checks](#)
- [Installation Location](#)
- Application Server**
- [Installation Summary](#)
- [Installation Progress](#)
- [Installation Complete](#)

WebLogic Server

WebSphere

Application Server Location

WLS installation detected, WebLogic Server support available in this Middleware Home.

8. Select **WebLogic Server** as the application server and click **Next**.

Note: EnterpriseOne supports only a WebLogic Server as the application server.

Installation Summary

ORACLE FUSION MIDDLEWARE 11g

- Welcome
- Skip Software Updates
- Prerequisite Checks
- Installation Location
- Application Server
- Installation Summary**
- Installation Progress
- Installation Complete

Middleware Home Location: /u01/Oracle/Middleware
Oracle Home Location: /u01/Oracle/Middleware/Oracle_WC1
Application Server Type: WebLogic Server
Application Server Location: /u01/Oracle/Middleware

Disk Space

- Required: 2180 MB
- Available: 133852 MB

Applications


- WebCenter Portal : Spaces
- WebCenter Portal : Framework
- WebCenter Portal : Portlets
- Oracle Wiki and Blog Server
- Oracle Discussion Server

Save Response File:


To change this configuration before installing, select the topic you want to change in the pane on the left.
To install this configuration, select **Install**.

9. Review the Install Summary.

10. Click **Install** to start the install process.

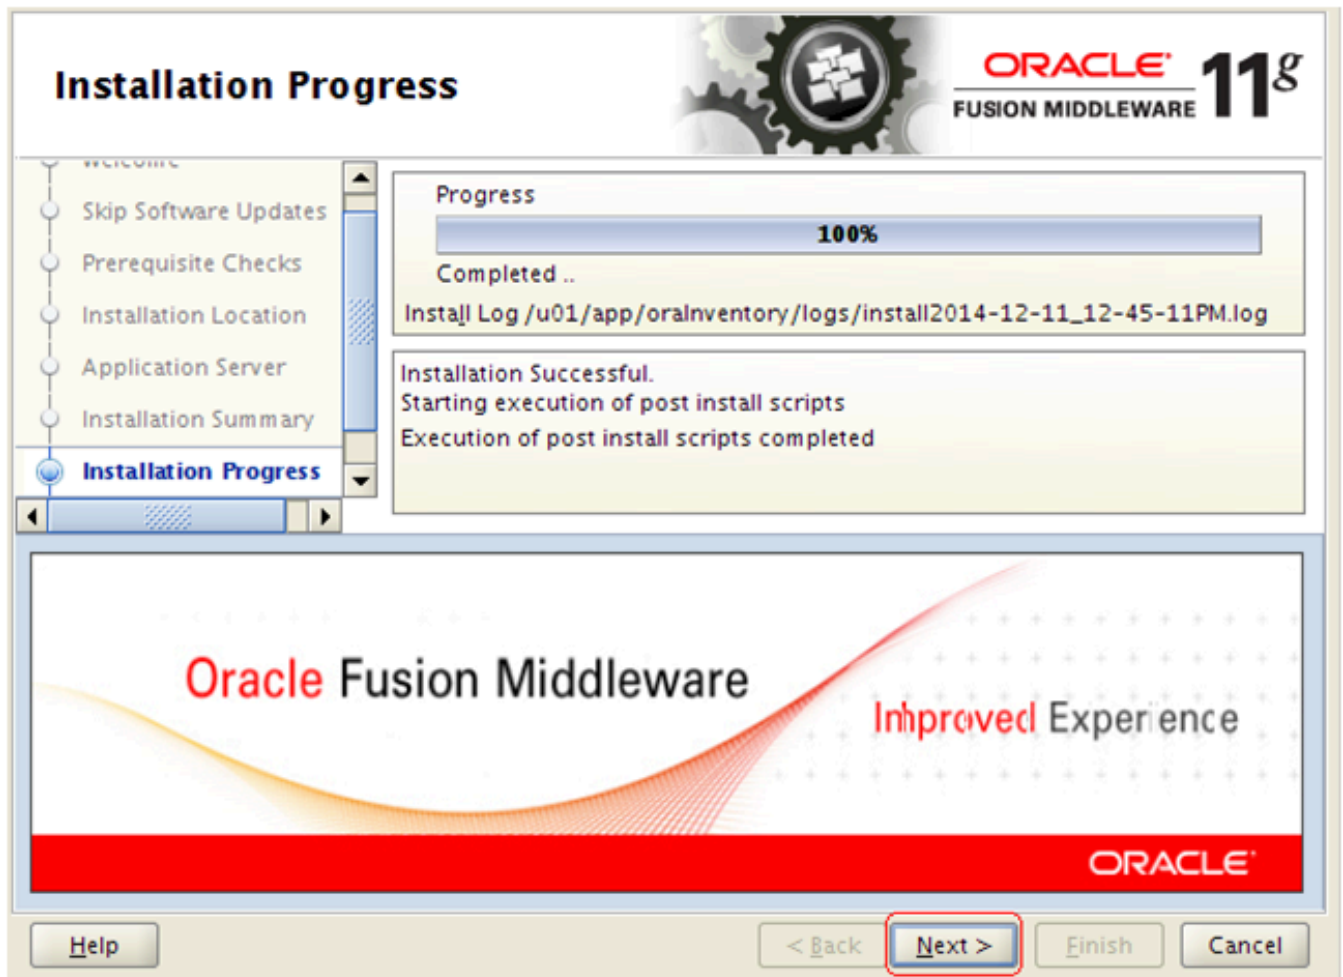

11. Click **Next** to continue when the install has completed.

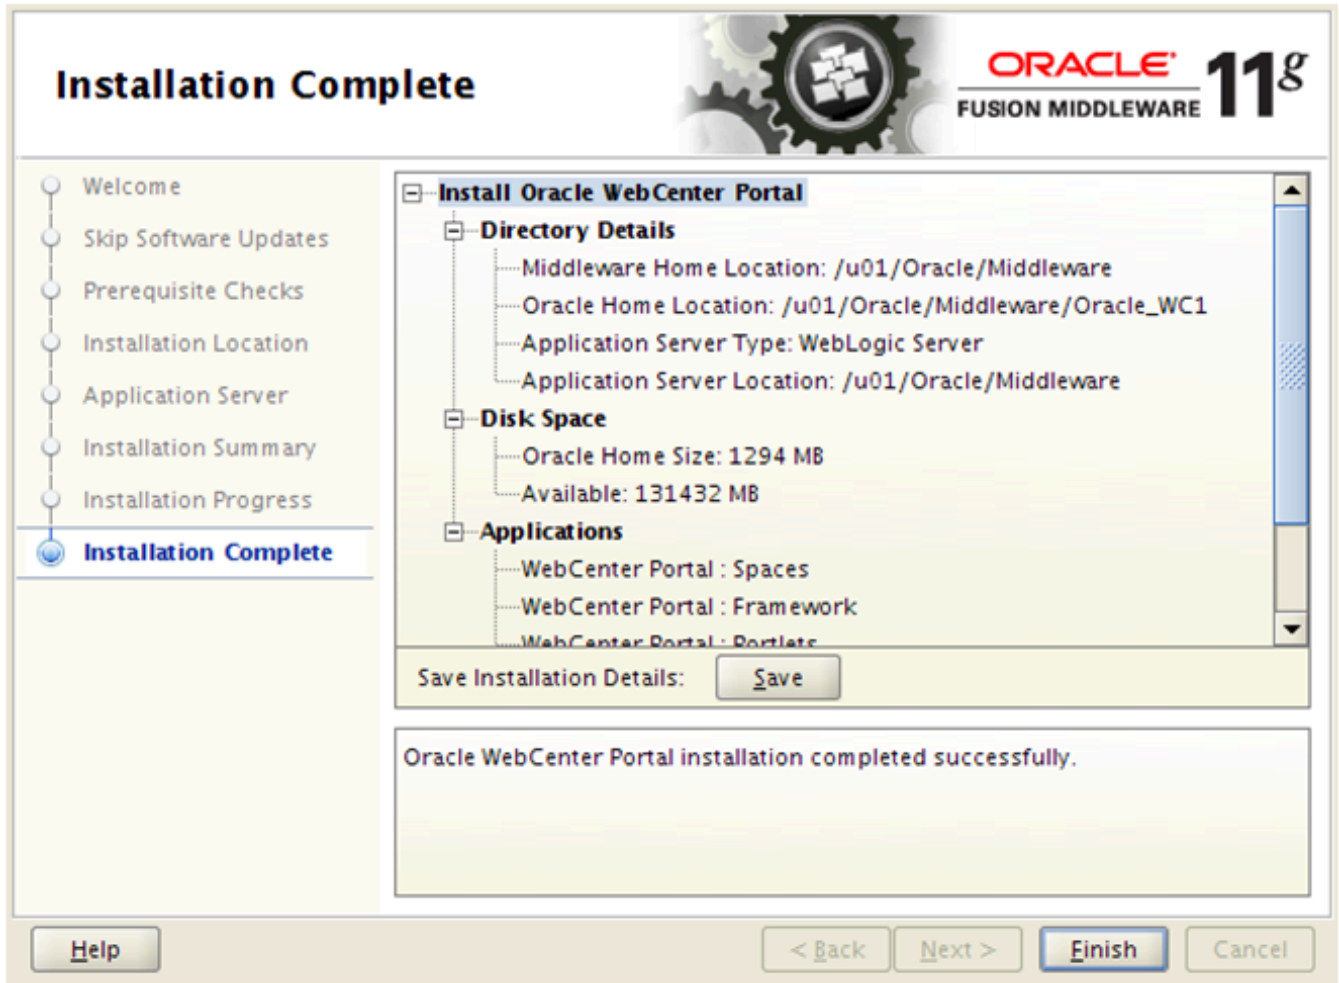

12. Click **Finish** when the install process is completed.
13. Run config.sh (.cmd) from <MW_Home>/Oracle_WC1/common/bin folder to create the WebCenter domain.

14. Select **Create a new WebLogic domain** option and click **Next**.

The screenshot shows a configuration window with two main radio button options:

- Generate a domain configured automatically to support the following products:** (Selected)
 - Basic WebLogic Server Domain - 10.3.6.0 [wserver_10.3] *
 - Oracle WebCenter Spaces - 11.1.1.0 [Oracle_WC1]
 - Oracle WebCenter Services Portlets - 11.1.1.6.0 [Oracle_WC1]
 - Oracle WebCenter Pagelet Producer - 11.1.1.0 [Oracle_WC1]
 - Oracle Enterprise Manager - 11.1.1.0 [oracle_common]
 - Oracle Portlet Producers - 11.1.1.0 [Oracle_WC1]
 - Oracle WebCenter Discussion Server - 11.1.1.0 [Oracle_WC1]
 - Oracle WebCenter ActivityGraph Engines - 11.1.1.0 [Oracle_WC1]
 - Oracle WebCenter Personalization - 11.1.1.0 [Oracle_WC1]
 - Oracle WebCenter Analytics Collector - 11.1.1.0 [Oracle_WC1]
 - Oracle WSM Policy Manager - 11.1.1.0 [oracle_common]
 - Oracle JRF WebServices Asynchronous services - 11.1.1.0 [oracle_common]
 - Oracle JRF - 11.1.1.0 [oracle_common]
 - Basic WebLogic SIP Server Domain - 10.3.6.0 [wserver_10.3]
 - Oracle Platform Security Service for Audit - 11.1.1.0 [oracle_common]
- Base this domain on an existing template** (Not selected)
 - Template location:

15. Select **Oracle WebCenter Spaces** to be part of this domain. Other required products will be selected automatically. You can add more products later if needed.

16. Click **Next**.

Enter the name and location for the domain and its applications:

Domain name:

Domain location:

Application location:

17. Enter the domain name. For example: webcenter_domain.

*Name:

*User password:

*Confirm user password:

Description:

18. Enter the domain Administrator user and password.

The image shows two side-by-side configuration panels. The left panel, titled "WebLogic Domain Startup Mode", contains two radio button options. The "Production Mode" option is selected and highlighted with a red rectangular border. The right panel, titled "JDK Selection", contains two radio button options. The "Available JDKs" option is selected. Below it is a list box containing the text "Sun SDK 1.7.0_45 @ /u01/Oracle/jdk1.7.0". Below the list box is the "Other JDK" option, which includes a text input field labeled "Location:" and a "Browse" button.

WebLogic Domain Startup Mode	JDK Selection
<p><input type="radio"/> Development Mode Utilize boot.properties for username and password and poll for applications to deploy. Sun JDK recommended for better startup performance during iterative development.</p>	<p><input checked="" type="radio"/> Available JDKs</p> <ul style="list-style-type: none">Sun SDK 1.7.0_45 @ /u01/Oracle/jdk1.7.0
<p><input checked="" type="radio"/> Production Mode Require the entry of a username and password and do not poll for applications to deploy. WebLogic JRockit JDK recommended for better runtime performance and management.</p>	<p><input type="radio"/> Other JDK</p> <p>Location: <input type="text"/> <input type="button" value="Browse"/></p>

19. Select **Production Mode** and verify the available JDK.

Note: Change only the input fields below that you wish to modify and values will be applied to all selected rows.


Vendor: DBMS/Service:
Driver: Host Name:
Schema Owner: Port:
Schema Password:

RAC configuration for component schemas:
 Convert to GridLink Convert to RAC multi data source Don't convert

	Component Schema	DBMS/Service	Host Name	Port	Schema Owner	Schema Password
<input type="checkbox"/>	WebCenterDS Schema	orcl	database_server	1521	WC8_WEBCENTER	*****
<input type="checkbox"/>	WebCenter MDS Schema	orcl	database_server	1521	WC8_MDS	*****
<input checked="" type="checkbox"/>	OWSM MDS Schema	orcl	database_server	1521	WC8_MDS	*****

20. Enter the JDBC Component Schema database connection.

Note: If you are not using the default Schema Owner, you must modify them one line at a time.

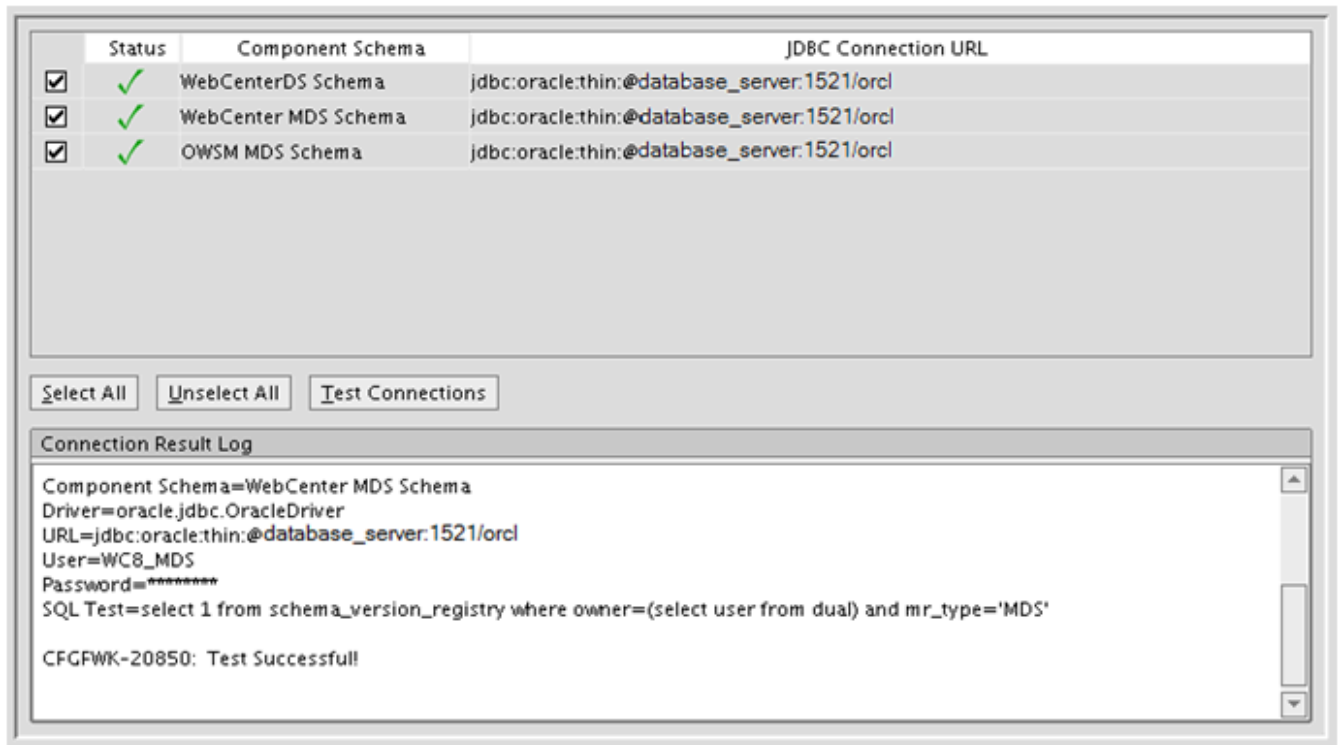

21. Test the JDBC Schema connection.



22. Select the **Administration Server** and **Managed Server, Cluster and Machine**.

A configuration form for an Administration Server. The fields are as follows:

- *Name: AdminServer
- *Listen address: All Local Addresses
- Listen port: 7001
- SSL listen port: N/A
- SSL enabled:

23. Enter the Administration Server name and Listen port.

A table showing the configuration for a Managed Server. The table has the following columns: Name*, Listen address*, Listen port, SSL listen port, and SSL enabled. The first row is selected.


	Name*	Listen address*	Listen port	SSL listen port	SSL enabled
→ 1	WC_Spaces	All Local Addresses	8888	N/A	<input type="checkbox"/>

24. Accept the default Managed Server name and port.
25. Click **Next** to skip the cluster configuration.

A table showing the configuration for a Machine. The table has the following columns: Name*, Post bind GID en..., Post bind G..., Post bind UID en..., Post bind U..., Node manager listen..., and Node manager list... The first row is selected.


	Name*	Post bind GID en...	Post bind G...	Post bind UID en...	Post bind U...	Node manager listen...	Node manager list...
→ 1	Machine_1	<input type="checkbox"/>	nobody	<input type="checkbox"/>	nobody	localhost	5556

26. From the Configure Machines page, select your platform and click **Add** to create a Machine name.

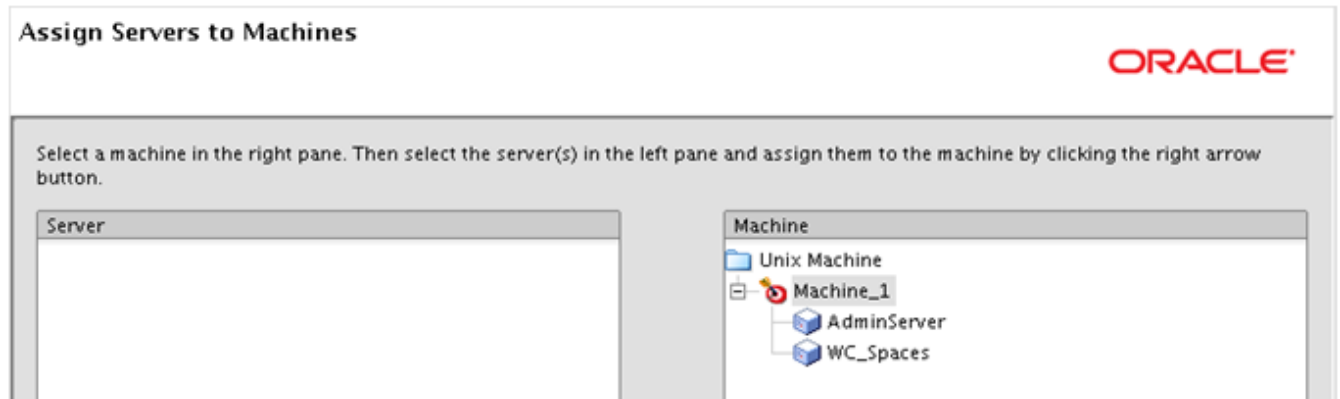

27. Assign Server to the Machine by moving the server in the left to the right under the Machine name.

28. Review the Configuration Summary and click **Create**.

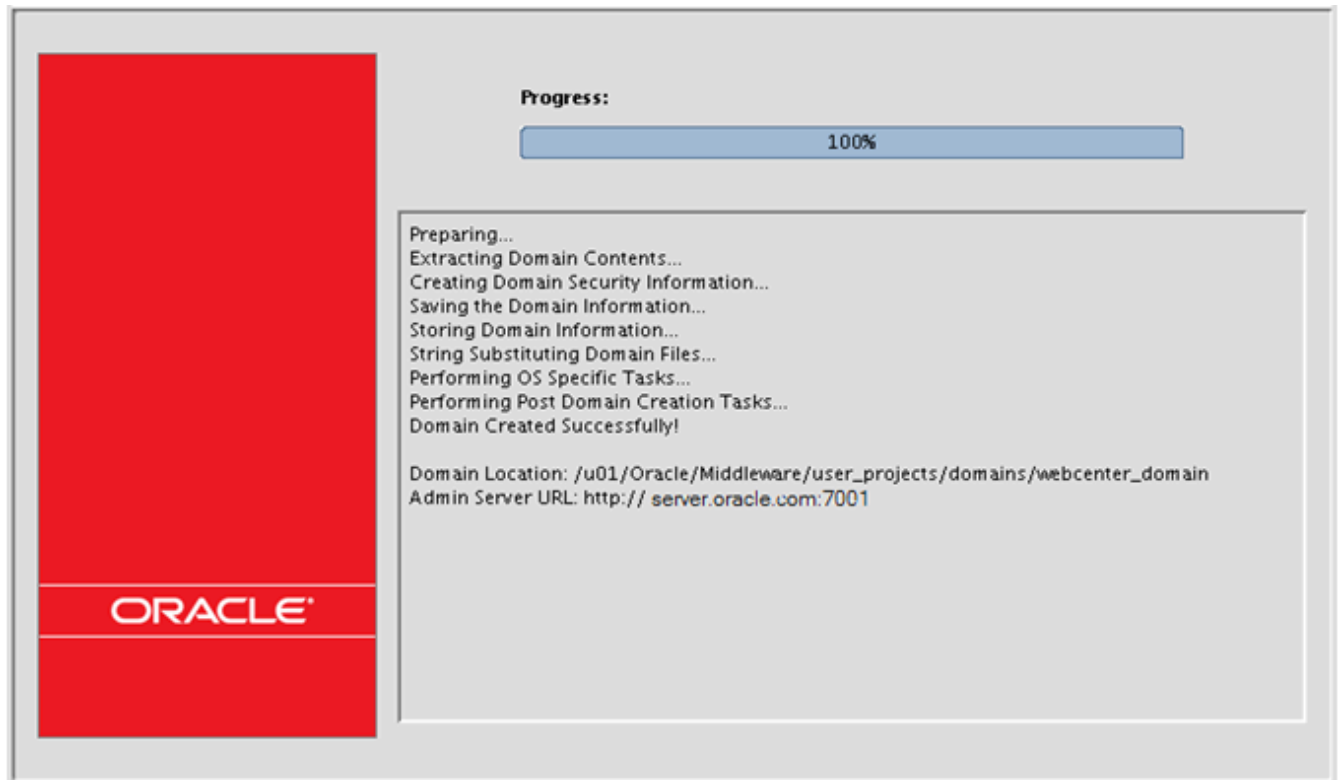

29. Click **Done** when the domain is created.

Post Installation Configuration

This section discusses:

- Applying the Required Patches
- Starting the WebLogic Administration Server

Applying the Required Patches

The following patches are required:

- p6880880 - Obtain the latest Opatch version (11.1.0.8.3 or higher)
- p18712656 - Microsoft Internet Explorer 11 support (Must apply before Bundle Patch)
- p19194669 - WebCenter 11.1.1.8.0 Bundle Patch 5

Please follow the instructions on each patch when applying these patches.

Starting the WebLogic Administration Server

To start the Weblogic Administration Server:

1. Start the WebLogic Admin Server (`startWebLogic.sh(.cmd)`) from `<MW_Home>\user_projects\domains\<webcenter_domain>\bin` folder.
2. Start WebLogic NodeManager (`startNodeManager.sh(.cmd)`) from `<MW_home>\wlserver_10.3\server\bin`.
3. The `startNodeManager` process creates a `nodemanager.properties` file in `<MW_home>\wlserver_10.3\common\nodemanager` folder.
4. Once the file is created, run `setNMProps.sh(.cmd)` from `<MW_home>oracle_common\common\bin` folder.

Note: Another option is that you can edit the `nodemanager.properties` by opening the file with an editor and change `StartScriptEnabled` to **true**.


Note: WebCenter Portal Enterprise Manager will not start correctly if this value is not set.

5. After the value is changed, you must stop and restart NodeManager.

6. Start the domain Admin Server and WC_Spaces.



7. After the Admin Server is started, you can access the domain console, Enterprise Manager, and WebCenter Portal.

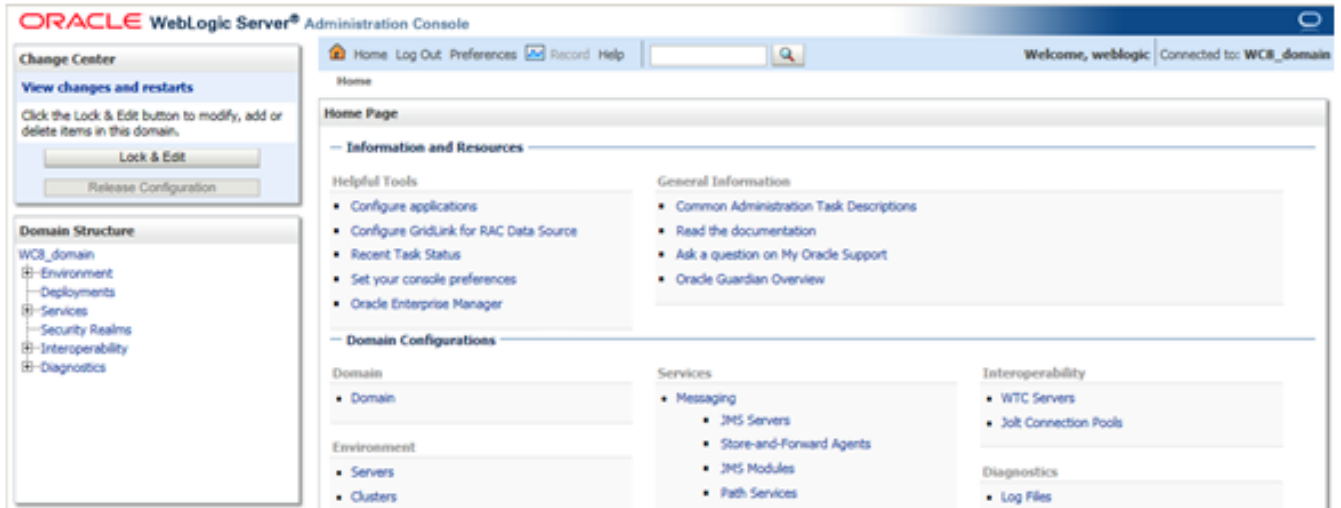

`http://server:7001/console` (Domain Console)

o



Application Server

ORACLE 11^g
FUSION MIDDLEWARE

- [Welcome](#)
- [Skip Software Updates](#)
- [Prerequisite Checks](#)
- [Installation Location](#)
- [Application Server](#)**
- [Installation Summary](#)
- [Installation Progress](#)
- [Installation Complete](#)


WebLogic Server

WebSphere

Application Server Location

WLS installation detected, WebLogic Server support available in this Middleware Home.

`http://server:7001/em` (Enterprise Manager)

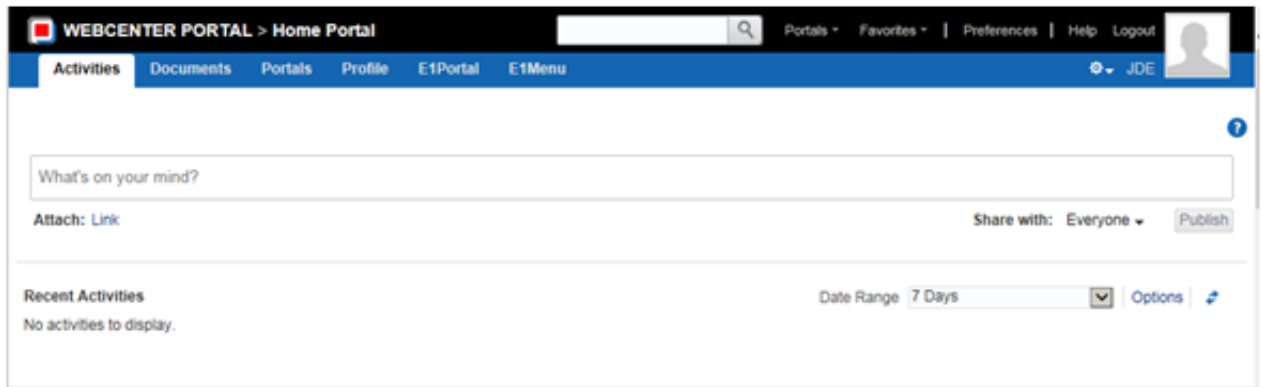

`http://server:8888/webcenter`



8. Click **About WebCenter Portal** on the bottom right to verify the version level.

Note: The bundle patch level will not be displayed. You will have to use the OPatch command "opatch lsinventory" to verify the patch.

Configuring the External LDAP Server


Oracle WebCenter comes with an embedded OID LDAP server. This embedded server should not be used for a production environment. You should configure an external LDAP server such as Oracle Internet Directory (OID) or other 3rd party LDAP server.

Configuring the Oracle Internet Directory Authenticator

In order to configure Oracle Internet Directory as an external LDAP server, you must have it installed and functioning.

Use these steps to configure the Oracle Internet Directory Authenticator.

1. Login to the WebLogic Server Administration Console.
2. From the Domain Structure pane, click **Security Realms**.

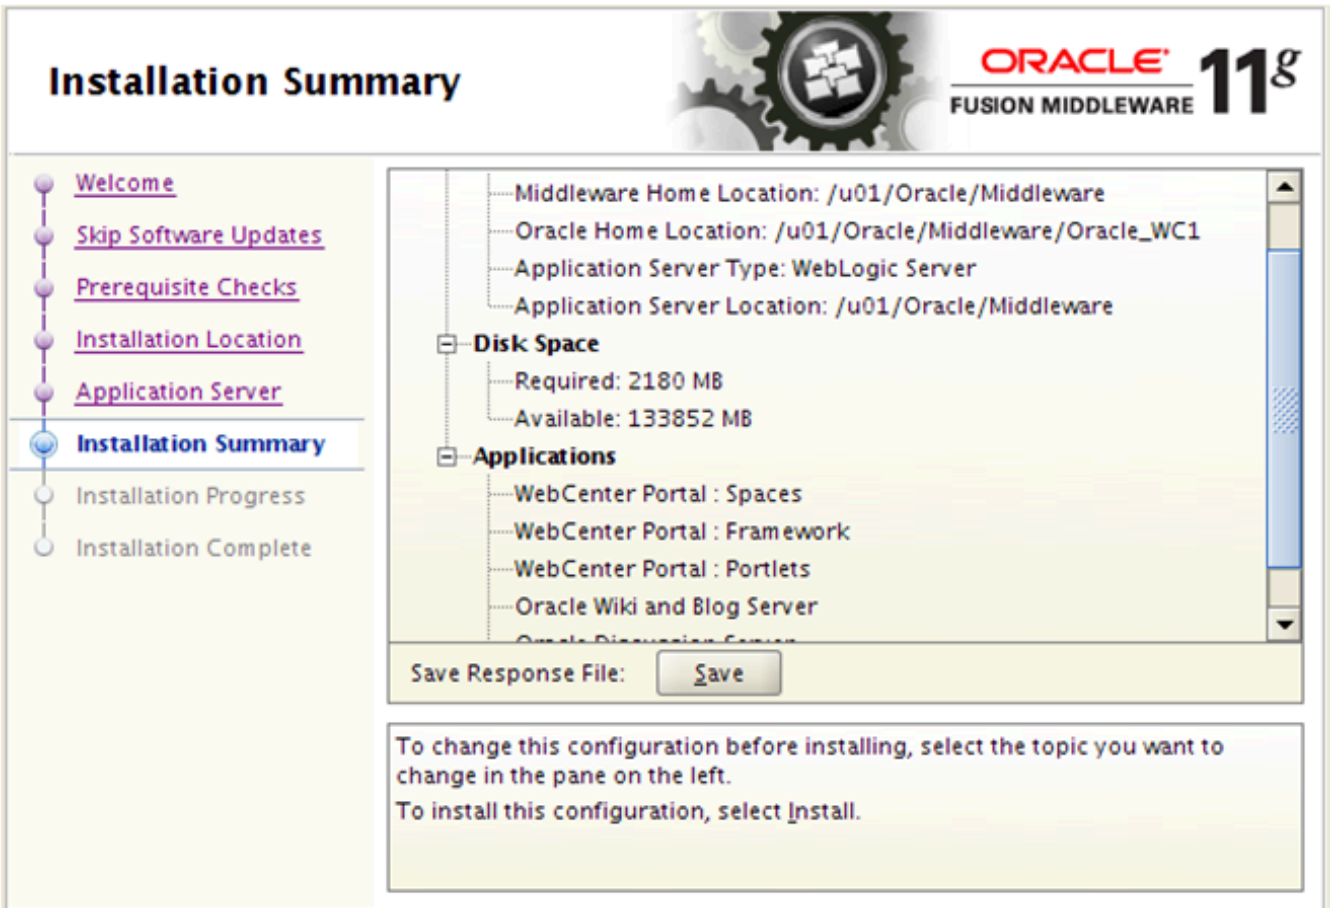


3. Select the **myrealm** entry to configure the OID authenticator.
4. Select the **Providers** tab.
5. Click **Lock and Edit**.

6. Click **New** to create a provider.

The name of the authentication provider.






* **Name:**

This is the type of authentication provider you wish to create.

Type: 

7. Enter a name for the new provider (for example, OIDProvider).
8. Select **OracleInternetDirectoryAuthenticator** as the type, and then click **OK**.
9. On the **Providers** tab, click the newly added provider. The common setting pane appears.

This page displays basic information about this Oracle Internet Directory Authentication provider. this provider is used in the login sequence.

 Name:	OIDProvider
 Description:	Provider that performs LDAP authentication
 Version:	1.0
 Control Flag:	<input type="text" value="SUFFICIENT"/> 

10. Set the control flag to **SUFFICIENT** and click **Save**.

Use this page to define the provider specific configuration for this Oracle Internet Directory Authentication provider.

Connection

Host: The host name or IP address of the LDAP server. [More Info...](#)

Port: The port number on which the LDAP server is listening. [More Info...](#)

Principal: The Distinguished Name (DN) of the LDAP user that WebLogic Server should use to connect to the LDAP server. [More Info...](#)

Credential: The credential (usually a password) used to connect to the LDAP server. [More Info...](#)

Confirm Credential:

SSLEnabled Specifies whether the SSL protocol should be used when connecting to the LDAP server. [More Info...](#)

Users

User Base DN: The base distinguished name (DN) of the tree in the LDAP directory that contains users. [More Info...](#)

All Users Filter: An LDAP search filter for finding all users beneath the base user distinguished name (DN). Note: If you change the user name attribute to a type other than cn, you must duplicate that change in the User From Name Filter and User Name Attribute attributes. [More Info...](#)

User From Name Filter: An LDAP search filter for finding a user given the name of the user. The user name attribute specified in this filter must match the one specified in the All Users Filter and User Name Attribute attributes. [More Info...](#)

User Search Scope: Specifies how deep in the LDAP directory tree the LDAP Authentication provider should search for users. [More Info...](#)

User Name Attribute: The attribute of an LDAP user object class that specifies the name of the user. The user name attribute specified must match the one specified in the All Users Filter and User From Name Filter attributes. [More Info...](#)

User Object Class: The LDAP object class that stores users. [More Info...](#)

Use Retrieved User Name as Principal Specifies whether or not the user name retrieved from the LDAP server should be used as the Principal in the Subject. [More Info...](#)

11. Open the **Provider Specific** tab.

Field	Value	Comment
Host:	The host ID for the LDAP server	

Field	Value	Comment
Port:	The LDAP server port number	
Principal:	The LDAP administrator principal	
Credential:	<password>	The administrator principal password
Confirm Credential:	<password>	
User Base DN:	User Search Base	
All User Filter:	(&(uid=*)(objectclass=person))	
User Name Attribute	uid	
Group Base DN:	Group search base - same as user base DN	
Use Retrieved User Name as Principal	Checked	User login IDs are usually case insensitive. This flag is required so that the subject established contains the user name as stored in the OID.

12. Complete the fields as shown in the table below. Leave the rest of the fields set to their default values.
13. Click **Save**.


Configuring the Default Authenticator and Provider Order

After configuring the OID Authenticator, ensure that the default authenticator's control flag is set to SUFFICIENT and reorder the providers.

Use these steps to configure the default authenticator and provider order:

1. Navigate to the Provider Settings pane.
2. Open the Default Authenticator and set the control flag to **SUFFICIENT**.

3. Do the same for any providers that you might have.

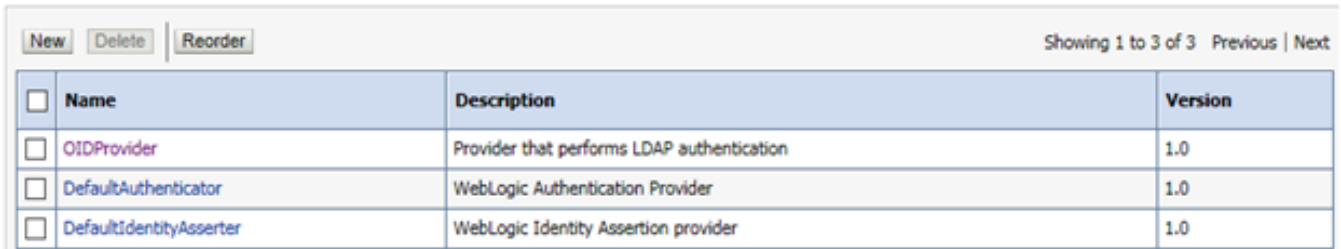

The screenshot shows a web interface for managing providers. At the top, there are buttons for 'New', 'Delete', and 'Reorder'. On the right, it says 'Showing 1 to 3 of 3' with 'Previous' and 'Next' links. Below this is a table with three columns: 'Name', 'Description', and 'Version'. Each row has a checkbox in the first column.

<input type="checkbox"/>	Name	Description	Version
<input type="checkbox"/>	OIDProvider	Provider that performs LDAP authentication	1.0
<input type="checkbox"/>	DefaultAuthenticator	WebLogic Authentication Provider	1.0
<input type="checkbox"/>	DefaultIdentityAsserter	WebLogic Identity Assertion provider	1.0

4. On the Setting Pane, reset the provider order to:


- OIDProvider (SUFFICIENT)
- DefaultAuthenticator (SUFFICIENT)
- DefaultIdentityAsserter

Note: If your WebLogic user is not part of the OID Administrators group, you will not be able to restart the WebLogic Admin Server.

You can use the following steps to add an Administrators group and add your user from OID.

1. Connect to Oracle Directory Manager, <http://host:port:7005/odsm>.
2. Create a new Group, Administrators. You can use the Create Like option.

3. Add your admin user to this group.

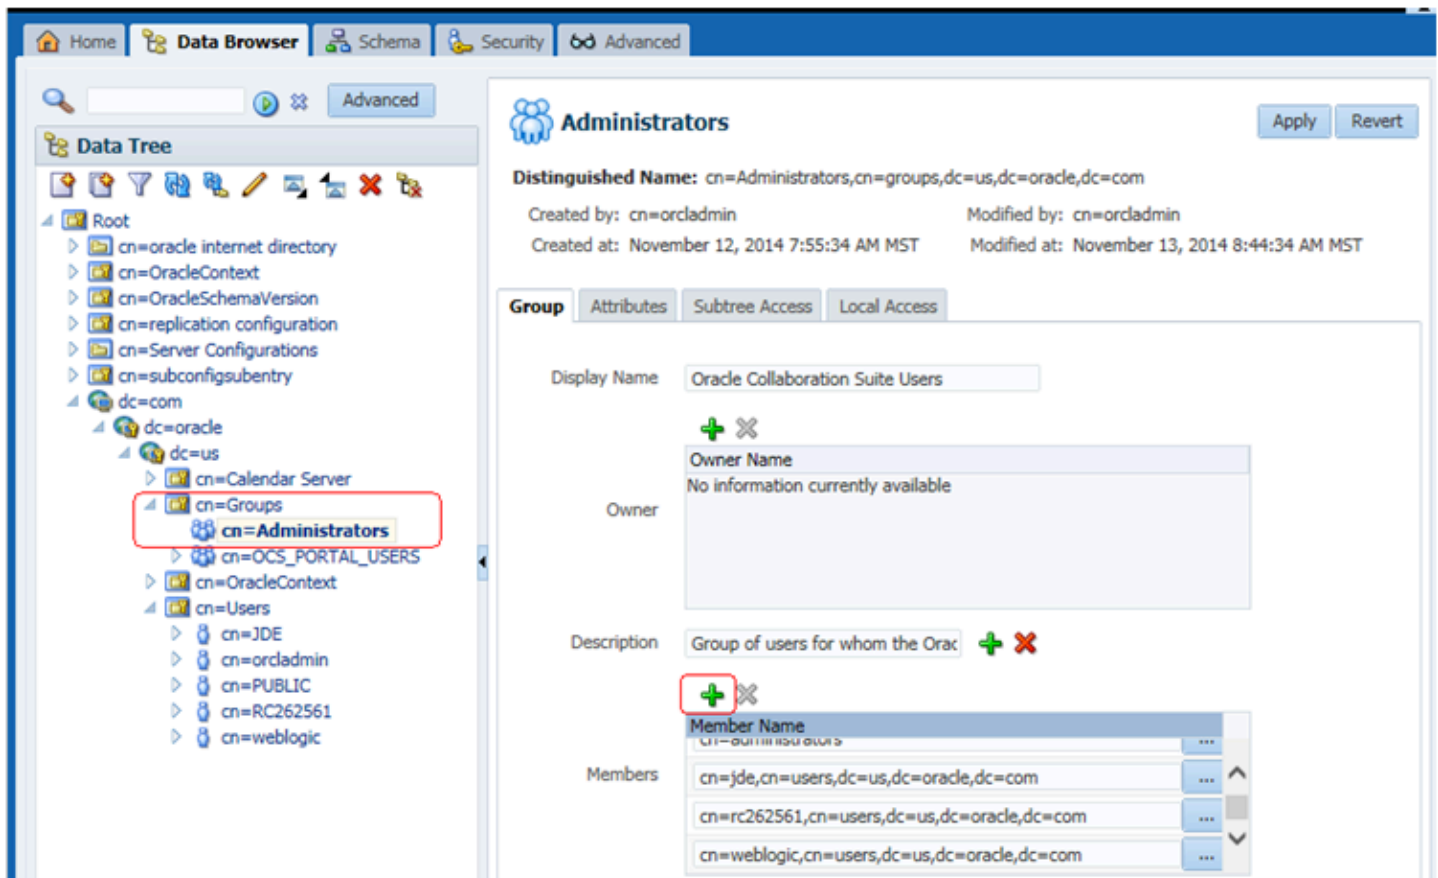

Now, you should be able to start the WebLogic Admin Server.

Configuring Oracle HTTP Server for WebCenter Portal

After you install and configure Oracle HTTP Server, you will then configure the Oracle HTTP server for WebCenter Portal.

Use the following example to configure *mod_wl_ohs.conf*. Verify that WebLogic port numbers match your configuration.

```
# WebCenter Portal
```

```
<Location /webcenter>  
    SetHandler weblogic-handler  
    WeblogicHost    webcenter.example.com  
    WeblogicPort    8888  
</Location>
```

After you edit the *mod_wl_ohs.conf* file, restart the HTTP server from *MW_Home/instance/instance1/bin* folder:

```
>./opmnctl startall
```

Now you can access WebCenter Portal using the HTTP port; for example,

```
http://myserver.com:7777/webcenter
```


4 Understanding WSRP

Understanding WSRP

This chapter helps you understand WSRP.

Understanding WSRP

This part of the guide covers the JD Edwards EnterpriseOne portal solution for Oracle WebCenter 11g based on the Web Services for Remote Portlets (WSRP) standards. Refer to *EnterpriseOne Portal Solutions Overview* in this guide for other portal solutions available with EnterpriseOne. This solution is only available for JD Edwards EnterpriseOne Application Release 9.0 with Tools Release 8.98.3 and beyond.

Two foundational terminologies in WSRP standards are Producer and Consumer.

The Producer is a web service that offers one or more portlets and implements various WSRP interfaces and operations. In the JD Edwards EnterpriseOne solution, the JD Edwards EnterpriseOne HTML Web Server is the WSRP producer.

Note: For the Oracle WebCenter Spaces solution, only the WebLogic Server is supported as a Producer for Oracle WebCenter.

The Consumer is a web service client that invokes producer-offered WSRP web services and provides an environment for users to interact with portlets offered by one or more producers. In the JD Edwards EnterpriseOne solution, the Oracle WebCenter is the WSRP consumer that is used to display and group multiple JD Edwards EnterpriseOne portlets as well as portlets provided by other WSRP producers.

Note: Server Manager must be used to deploy the EnterpriseOne HTML Web Client as a WSRP/Portal producer.

5 Administering WSRP with Oracle WebCenter 11g

Configuring Oracle WebCenter Portal for EnterpriseOne

Oracle WebLogic Server: Effective with JD Edwards EnterpriseOne Tools Release 8.98.4, Oracle WebLogic Server 10.3.x is supported as a producer.

Oracle WebLogic Administration Server needs to be running in order to register a WSRP producer. The Oracle WebCenter Enterprise Manager is part of the Oracle WebLogic Administration Server. They both use the same admin port.

Starting the WebLogic Node Manager

Starting Node Manager on a machine that hosts Managed Servers allow you to start and stop the Managed Servers remotely using the Administration Console or the command line. Node Manager can also automatically restart a Managed Server after an unexpected failure.

The steps below are for UNIX and Microsoft Windows platforms, respectively.

Note: Normally the Node Manager is running with the default port 5556.

#To start Node Manager on UNIX Systems:

Start the Node Manager by running this script:

```
MW_Home/wlserver_10.3/server/bin/startNodeManager.sh
```

To start Node Manager on Microsoft Windows Systems:

Start the Node Manager by running this script:

```
MW_Home\wlserver_10.3\server\bin\startNodeManager.cmd
```

Starting the WebLogic Administration Server

The steps below are for UNIX and Microsoft Windows platforms, respectively.

Starting WebLogic Administration on UNIX Systems

To start WebLogic Administration on UNIX Systems:

1. Run this script in the directory where you create your new domain: startWebLogic.sh - The default location is: MW_HOME/user_projects/domains/your_domain/bin.
2. Before the server is started, you will be prompted for the WebLogic Admin Server user and password. If you do not want the server to prompt for user and password, you can create a boot.properties in this folder:

MW_HOME/user_projects/domains/your_domain/servers/AdminServer/security. You might need to create the security folder if it does not exist.

Starting WebLogic Administration on Microsoft Windows Systems

To start WebLogic Administration on Microsoft Windows Systems:

1. Run this script in the directory where you create your new domain: startWebLogic.cmd The default location is: MW_HOME\user_projects\domains\your_domain
2. Before the server is started, you will be prompted for the WebLogic Admin Server user and password. If you do not want the server to prompt for user and password, you can create a boot.properties in this folder: MW_HOME\user_projects\domains\your_domain\servers\AdminServer\security You might need to create the security folder if it does not exist.

Modifying the boot.properties file

To modify the boot.properties file:

The boot.properties should contain two entries. For example:

- username=weblogic
- password=<password>

You should replace the username and password entries with values that are valid for your installation.

Note: Both parameters (username and password) must be entered in lowercase.

The information in this file will be encrypted after the first use. You can use the same file for other managed server configuration.

Associate a Machine to a Server

In order to start a managed server from the Administration Console, you must first create a machine and then associate the managed server with that machine.

1. Login to the Oracle WebLogic Administration Console. For example:
`http://host:7001/console`
2. Navigate to **Environment > Machines**.
3. Click the **Lock & Edit** button.
4. Click the **New** button.
5. Click the **New** button.
6. Enter a machine name. For example: **Machine-WC**.
7. Select the machine name you just created, select **Target** tab, and associate this machine to your managed servers.
8. Click the **Activate Changes** button.

Starting the Oracle WebCenter Portal

Once a managed server is associated to a machine, you can select the server to start.

1. Navigate to **Environment > Servers**.

2. Select the **Control** tab.
3. Select the Managed Server you want to start.
4. Click the **Start** button.

Summary of Servers

Configuration **Control**

Use this page to change the state of the servers in this WebLogic Server domain. Control operations on Managed Servers require starting the Node Manager. Starting Managed Servers in Standby mode requires the domain-wide administration port.

Customize this table

Servers (Filtered - More Columns Exist)


Start Resume Suspend Shutdown Restart SSL Showing 1 to 2 of 2 Previous Next

<input type="checkbox"/>	Server	Machine	State	Status of Last Action
<input type="checkbox"/>	AdminServer(admin)	Machine_1	RUNNING	None
<input checked="" type="checkbox"/>	WC_Spaces	Machine_1	RUNNING	None


Verifying Configuration File Settings

WSRP Producer registration will fail unless these JD Edwards configuration settings are correctly set. Edit these settings through EnterpriseOne Server Manager.

Enter a valid Enterprise user and a valid environment in the JDBJ Bootstrap Session:

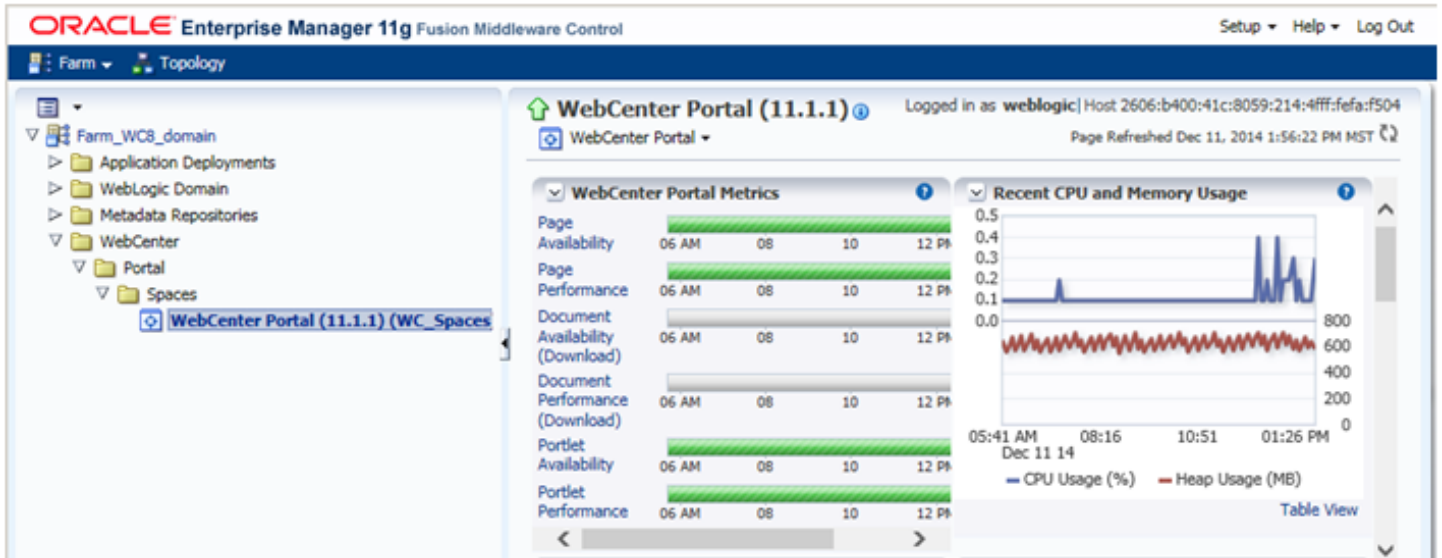

Enter a correct Path Code and Default Environment. Compression must be off on the WSRP producer.

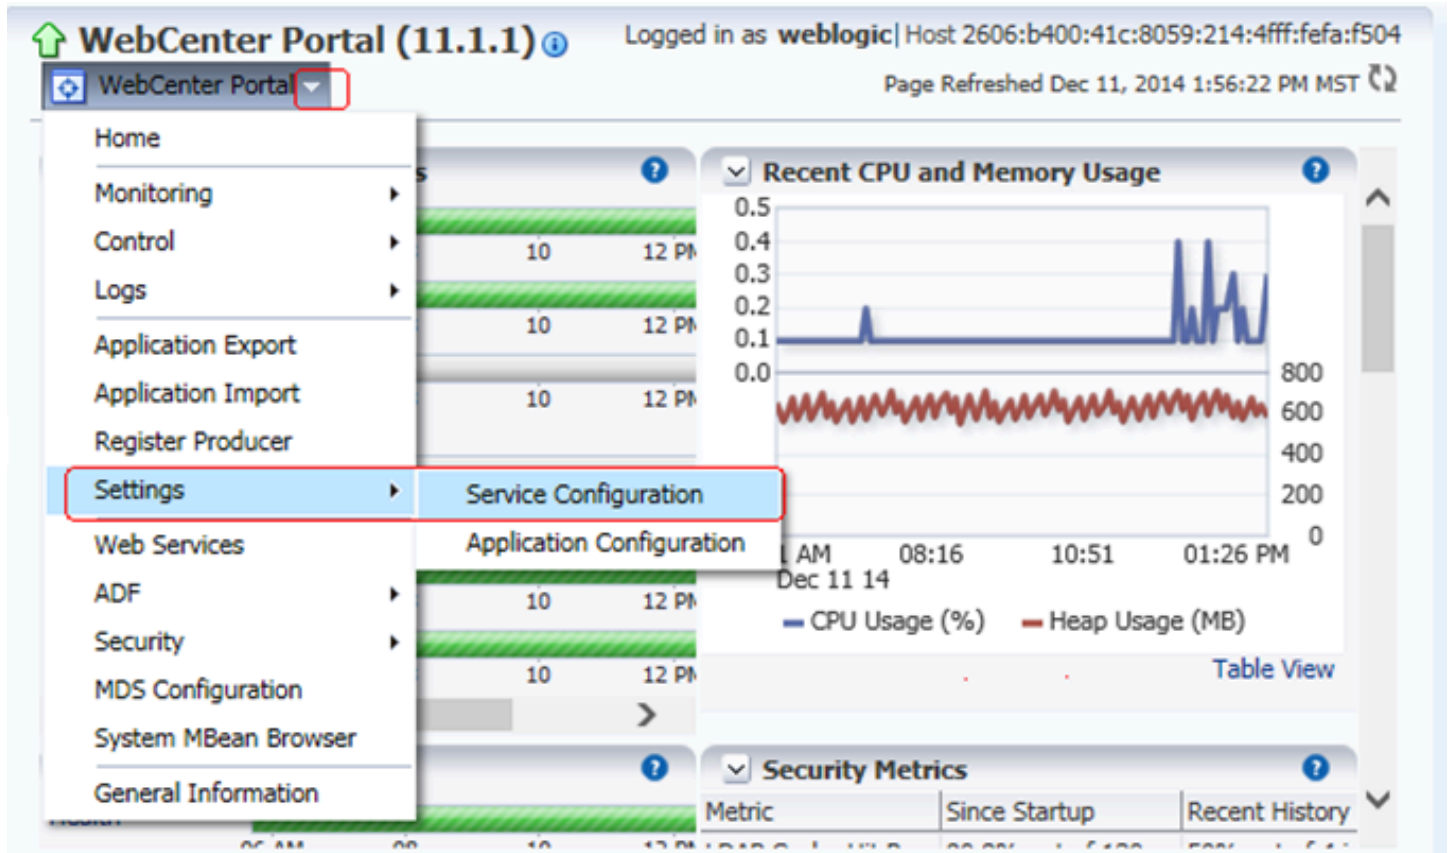

Registering the WSRP Producer

EnterpriseOne WSRP Portlets can be registered using Enterprise Manager or WebCenter Console.

Registering a New WSRP Producer for Oracle WebCenter Using Enterprise Manager

To register a New WSRP Producer for Oracle WebCenter Using Enterprise Manager:

1. Open a browser.


2. Enter the Enterprise Manager URL. For example:

`http://host:7001/em`


Note: The port number is the same as the WebLogic Admin Console.

3. Enter the Admin user and password.

Below is an example image of the Enterprise Manager console:

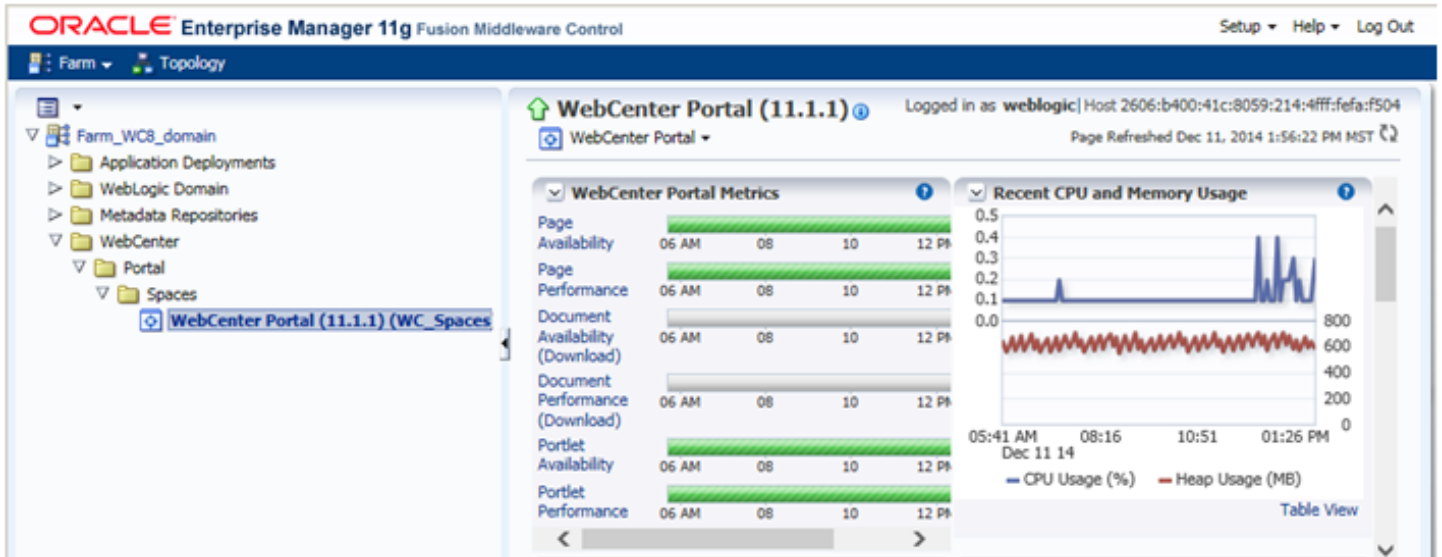

- From the node structure in the left pane, expand WebCenter > WebCenter Spaces and then click on **webcenter (WC_Spaces)**.

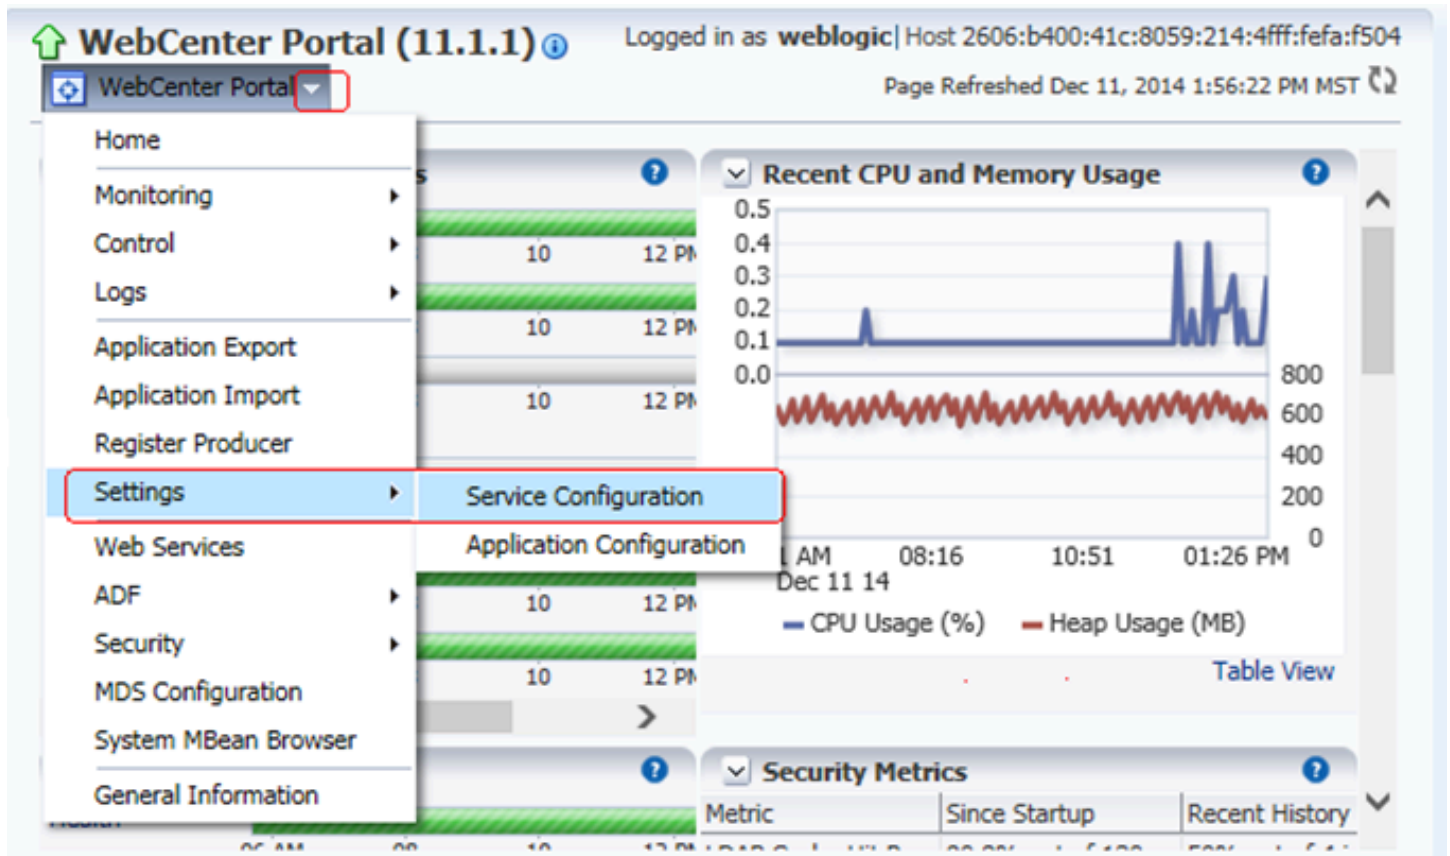

5. Click the **WebCenter** drop down menu and select **Settings -> Service Configuration**.

WebCenter Portal (11.1.1) Logged in as **weblogic** | Host 2606:b400:41c:8059:214:4fff:fefa:f504
WebCenter Portal Page Refreshed Dec 11, 2014 1:59:05 PM MST

WebCenter Portal Service Configuration

Use this page to configure services for the WebCenter Portal application. Choose a service to view or modify the current configuration, and to configure new service connections.

Service Name
Content Repository
Discussions and Announcements
External Applications
Instant Messaging and Presence
Mail Server
Personal Events
Portlet Producers
Search
Worklist

Manage Portlet Producer Connections

[+ Add](#) [Edit](#) [Delete](#) [Refresh](#)

Name	Producer Type	URL Endpoint
dnptlx109h_WSRP	WSRP Producer	

6. Select **Portlet Producers** and then click **Add**.

Add New Portlet Producer Test OK Cancel

Name and Type

* **Producer Type** WSRP Producer Oracle PDK-Java Producer Pagelet Producer

* **Connection Name**

Connection Details

* **WSDL URL**

Use Proxy?

Proxy Host

Proxy Port

Advanced Configuration

Specify additional (optional) information for the connection.

Default Execution Timeout (Seconds)

7. On Add Portlet Producer Connection, enter the WSRP URL where the EnterpriseOne HTML web server is running.

For WebLogic Server:

If the web server is running on the WebLogic Server, then you would follow this format:

```
http://<host>:<port>/jde/wsd/WSRP_v1_Service.wsdl
```

Note: If you are planning to use the SSL configuration, you must import the certificate from the WSRP producer to WebCenter Portal keystore.

8. On Add Portlet Producer Connection, increase the **Default Execute Timeout** to about 300 seconds; otherwise the registration might fail due to network performance.

Registering the WSRP Producer using the HTTPS Protocol

To register the WSRP Producer using the HTTPS Protocol:

1. Edit the WSRP_v1_Service.wsdl file from the Producer with the HTTPS protocol and port in these two locations:

```
ORACLE_HOME/user_projects/domains/<domain>/servers/<server>/stage/<instance>/app/webclient.war/wsd/
folder
```

```
JDE_Agent_Home/targets/<instance>/owl_deployment/webclient.ear/app/webclient.war/wsd/ folder
```

```
<service name="WSRP_v1_Service">
  <port name="WSRPBaseService" binding="bind:WSRP_v1 Markup Binding SOAP">
    <soap:address location="https://myserver.com:86/jde/WSRPBaseService"/>
  </port>
  <port name="WSRPServiceDescriptionService" binding="bind:WSRP_v1 ServiceDescription Binding_SOAP">
    <soap:address location="https://myserver.com:86/jde/WSRPServiceDescriptionService"/>
  </port>
</service>
```

2. Export the certificate from the Producer using the 'Base-64 encoded X.509' format.
3. Copy the Producer certificate to the WebCenter Portal machine.
4. Import the Producer certificate using the Java Keytool utility from the WebCenter Portal machine. For example:

```
keytool -importcert -trustcacerts -alias producerkey -file /tmp/producer.cer -keystore /java/jre/lib/
security/cacerts
```

5. Enter the keystore password.
6. Verify and accept the certificate.
7. A successful message should display: **Certificate was added to keystore.**
8. Restart the WebCenter Portal server and register the Producer.


Registering a New WSRP Producer for Oracle WebCenter Using WebCenter Console

You can also register a Portlet Producer from the WebCenter Console instead of using the Enterprise Manager Console as described in the previous section. You must sign on as a WebCenter Administrator:

<http://host:8888/webcenter>

To register a Portlet Producer from the WebCenter:

1. Login to WebCenter Portal.

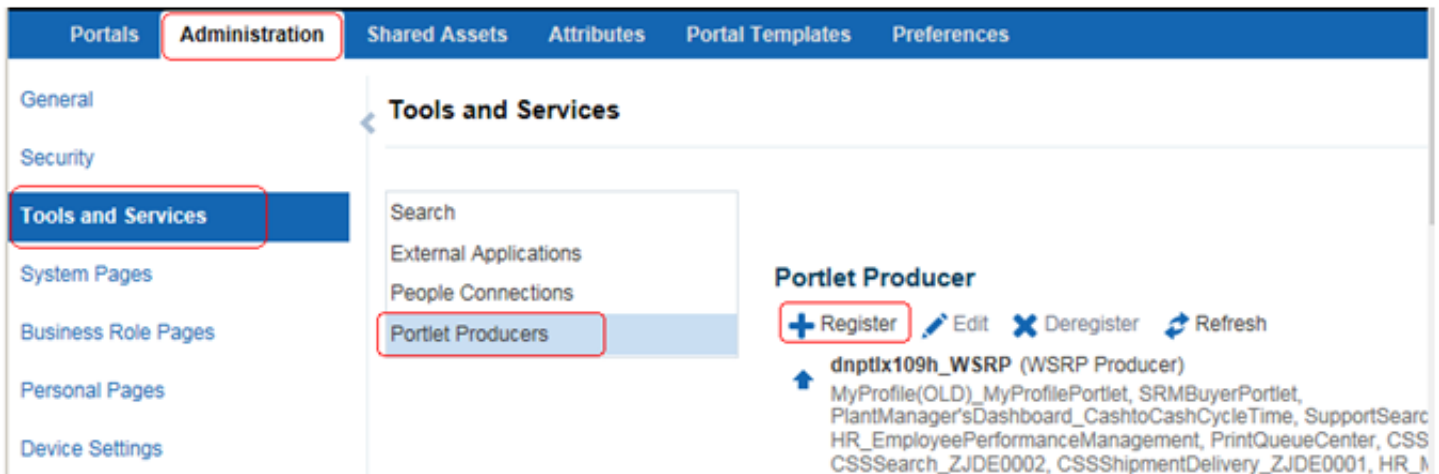

2. Select Administration tab - Tools and Services - Portlet Producers.
3. Click **Register** to add a new producer or **Edit** to change the settings for an existing producer.

Register Portlet Producer

Name and Type

* Producer Name
Producer Type WSRP Producer Oracle PDK-Java Producer Pagelet Producer

Portlet Producer URL

* WSDL URL
Use Proxy?
Proxy Host
Proxy Port

Advanced Configuration

Specify additional (optional) information.


Default Execution Timeout (Seconds)

4. Enter the WSDL and click the **Test** button to verify the server connection.
5. Set the default execution timeout to 300 seconds. Adjust this value based on your network traffic.
6. Once the producer is registered, you can return to your page and add the portlet from this producer.

Reviewing the Existing WSRP Registration on Your System

To review the existing WSRP registration on your system:

1. On the WebCenter Portal dropdown menu, select **Settings > Service Configuration**.

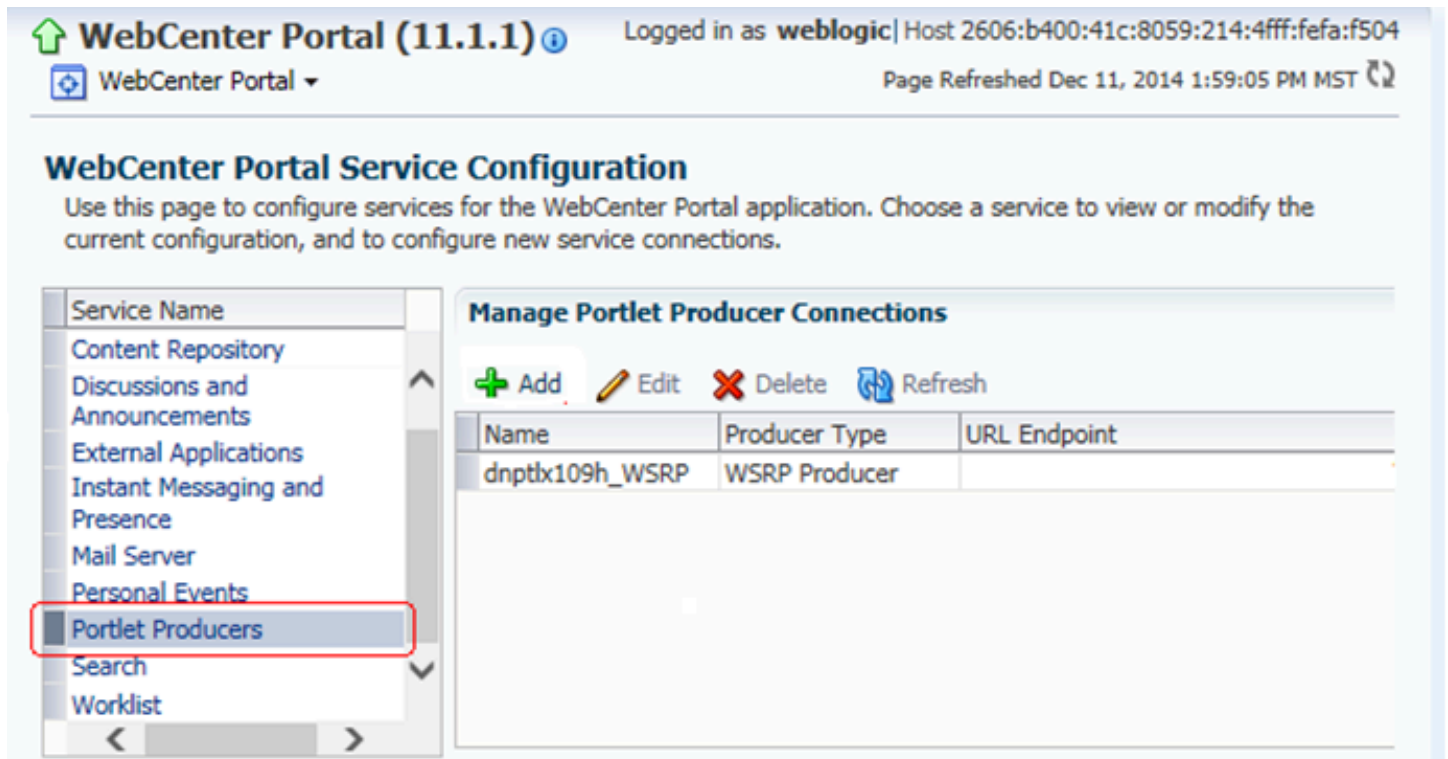

WebCenter Portal (11.1.1) Logged in as weblogic | Host 2606:b400:41c:8059:214:4fff:fefa:f504
WebCenter Portal Page Refreshed Dec 11, 2014 1:59:05 PM MST

WebCenter Portal Service Configuration

Use this page to configure services for the WebCenter Portal application. Choose a service to view or modify the current configuration, and to configure new service connections.

Service Name
Content Repository
Discussions and Announcements
External Applications
Instant Messaging and Presence
Mail Server
Personal Events
Portlet Producers
Search
Worklist

Manage Portlet Producer Connections

+ Add Edit Delete Refresh

Name	Producer Type	URL Endpoint
dnptlx109h_WSRP	WSRP Producer	

2. On WebCenter Service Configuration, select **Portlet Producers** to display all of the existing Producers.

Adding Portlets from the WSRP Producer to a Page

Once the WSRP Producer is registered, you are now ready to add the EnterpriseOne Portlets to Oracle WebCenter Portal.

To create a JD Edwards EnterpriseOne user on WebCenter:

Note: In order to access JD Edwards EnterpriseOne Portlets, this user must be a valid JD Edwards EnterpriseOne user. If you have configured an external LDAP server, then users must be added from the LDAP server.

1. Create a JD Edwards EnterpriseOne user on WebCenter from the Administration Console.
2. Open a browser, access the Oracle WebLogic Server Administration Console. For example:

`http://host:port/console`

WebCenter Portal (11.1.1) Logged in as **weblogic** | Host 2606:b400:41c:8059:214:4fff:fefa:f504
WebCenter Portal Page Refreshed Dec 11, 2014 1:59:05 PM MST

WebCenter Portal Service Configuration

Use this page to configure services for the WebCenter Portal application. Choose a service to view or modify the current configuration, and to configure new service connections.

Service Name

- Content Repository
- Discussions and Announcements
- External Applications
- Instant Messaging and Presence
- Mail Server
- Personal Events
- Portlet Producers**
- Search
- Worklist

Manage Portlet Producer Connections

[+ Add](#) [Edit](#) [Delete](#) [Refresh](#)

Name	Producer Type	URL Endpoint
dnptlx109h_WSRP	WSRP Producer	

3. Navigate to **Security Realms > myrealm**.

Settings for myrealm

Configuration **Users and Groups** Roles and Policies Credential Mappings Providers Migration

Users Groups

This page displays information about each user that has been configured in this security realm.

[Customize this table](#)

Users

Showing 1 to 3 of 3 Previous | Next

<input type="checkbox"/>	Name	Description	Provider
<input type="checkbox"/>	JDE	EnterpriseOne User	DefaultAuthenticator
<input type="checkbox"/>	OracleSystemUser	Oracle application software system user.	DefaultAuthenticator
<input type="checkbox"/>	weblogic	This user is the default administrator.	DefaultAuthenticator

4. Select the **Users and Groups** tab.

5. Click the **New** button and enter the new user information.

Create a New User

OK Cancel

User Properties

The following properties will be used to identify your new User.
* Indicates required fields

What would you like to name your new User?

* Name:

How would you like to describe the new User?

Description:

Please choose a provider for the user.

Provider:

The password is associated with the login name for the new User.

Password:

Confirm Password:

OK Cancel


6. Select your LDAP provider. Select **DefaultAuthenticator** for the default embedded OID server.
7. Click the **OK** button to save the information.

Accessing the Oracle WebCenter


To access the Oracle WebCenter:

1. From a browser, access your WebCenter URL. For example: `http://host:8888/webcenter` where 8888 is the default WebCenter port.
2. Enter the user and password. In order to access EnterpriseOne Portlets, this user must be an EnterpriseOne user.
3. Select **Create Page** from the Page Actions option on upper right.


4. Select the **Page** option.

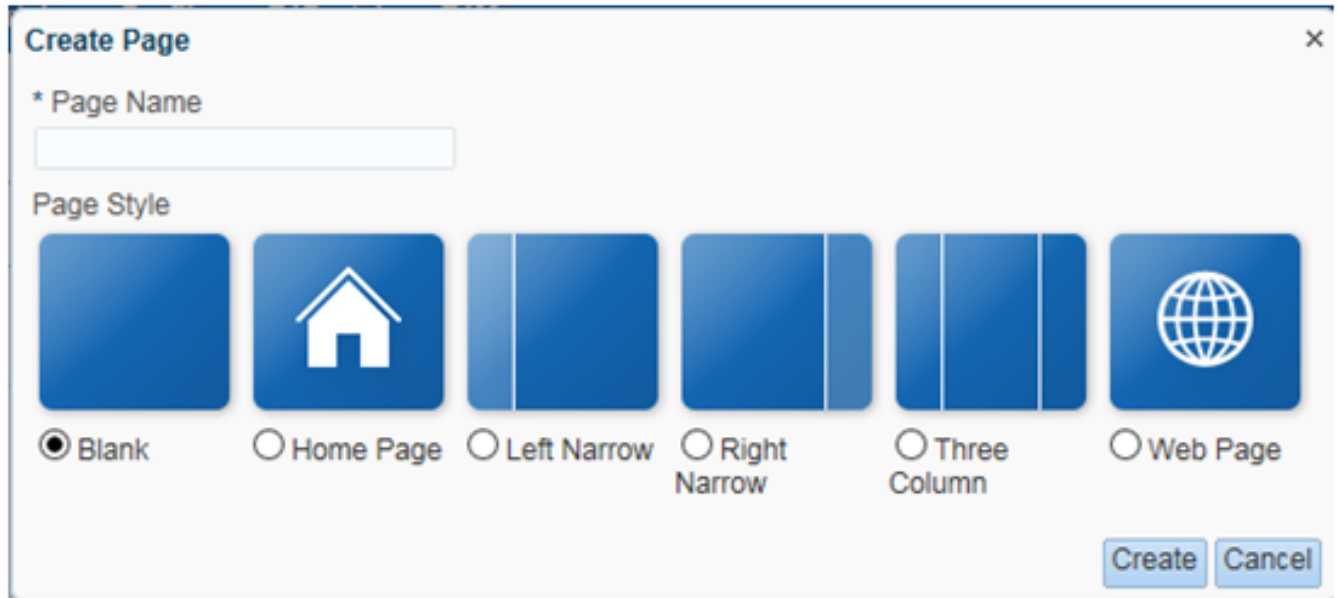


5. Enter the **Page Name** and select the **Page Style**, and then click **Create**.
6. An empty page will be created.

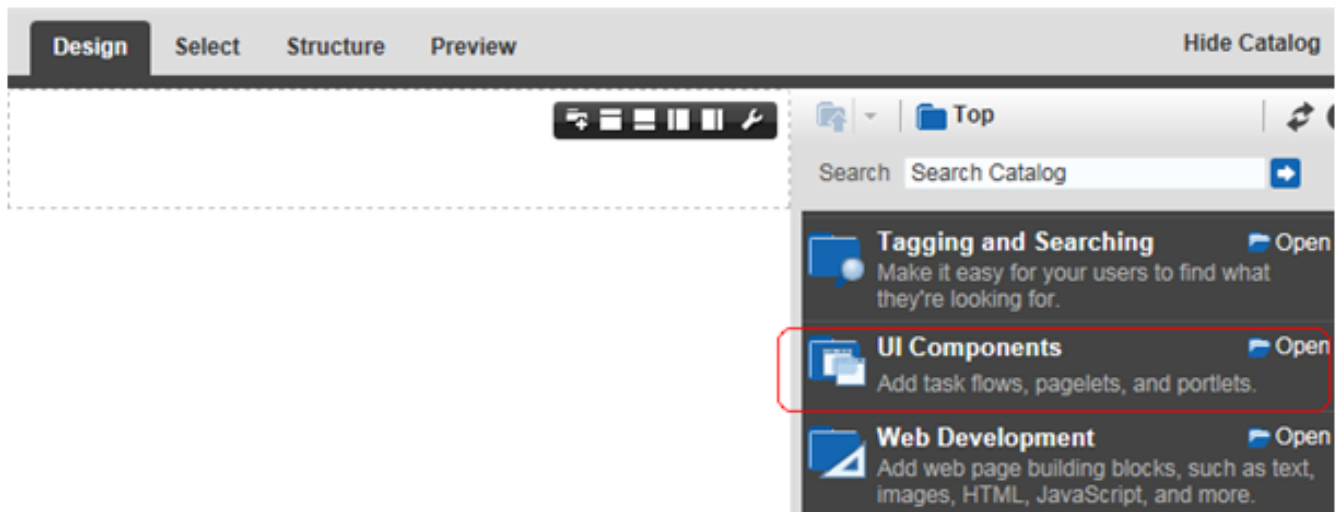


7. Select the **UI Components** from the Catalog Search panel.

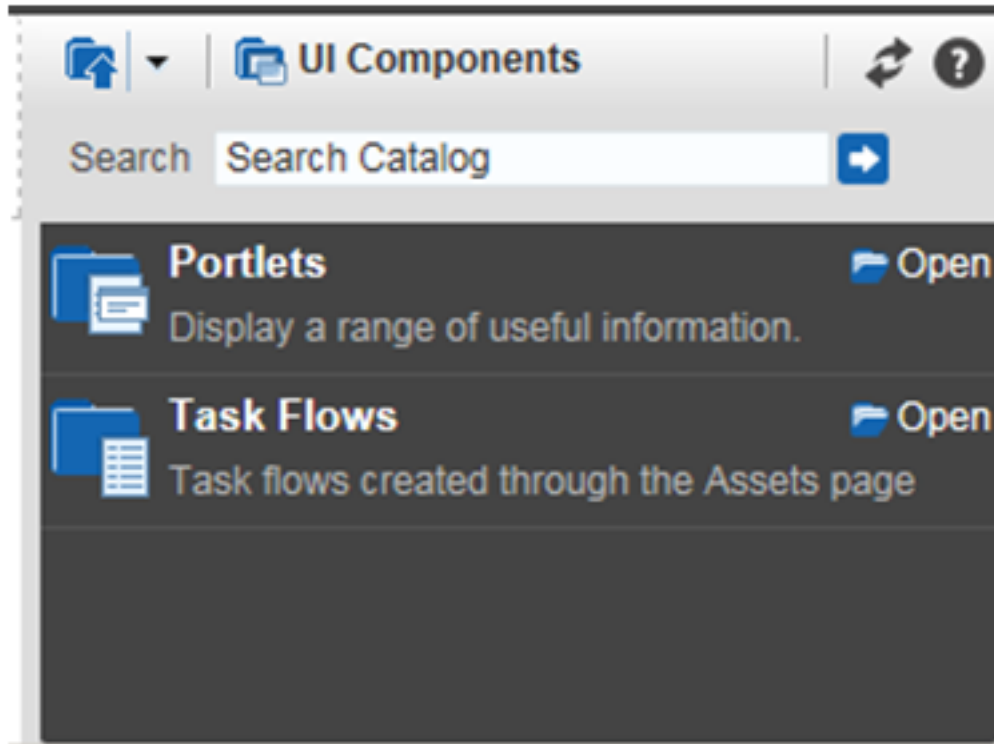

8. On Catalog, select the **Portlets** component.

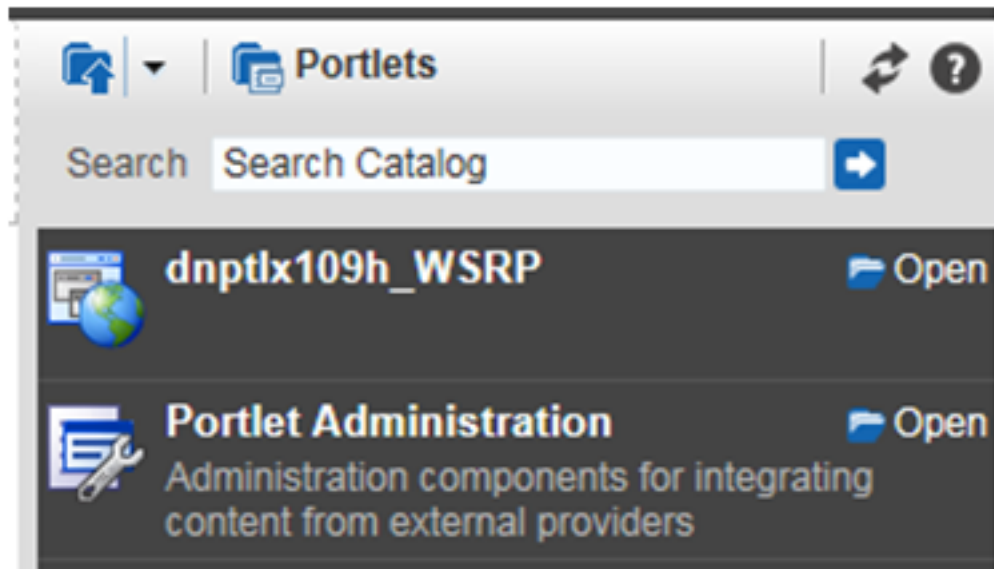

9. Select your Producer from the list.

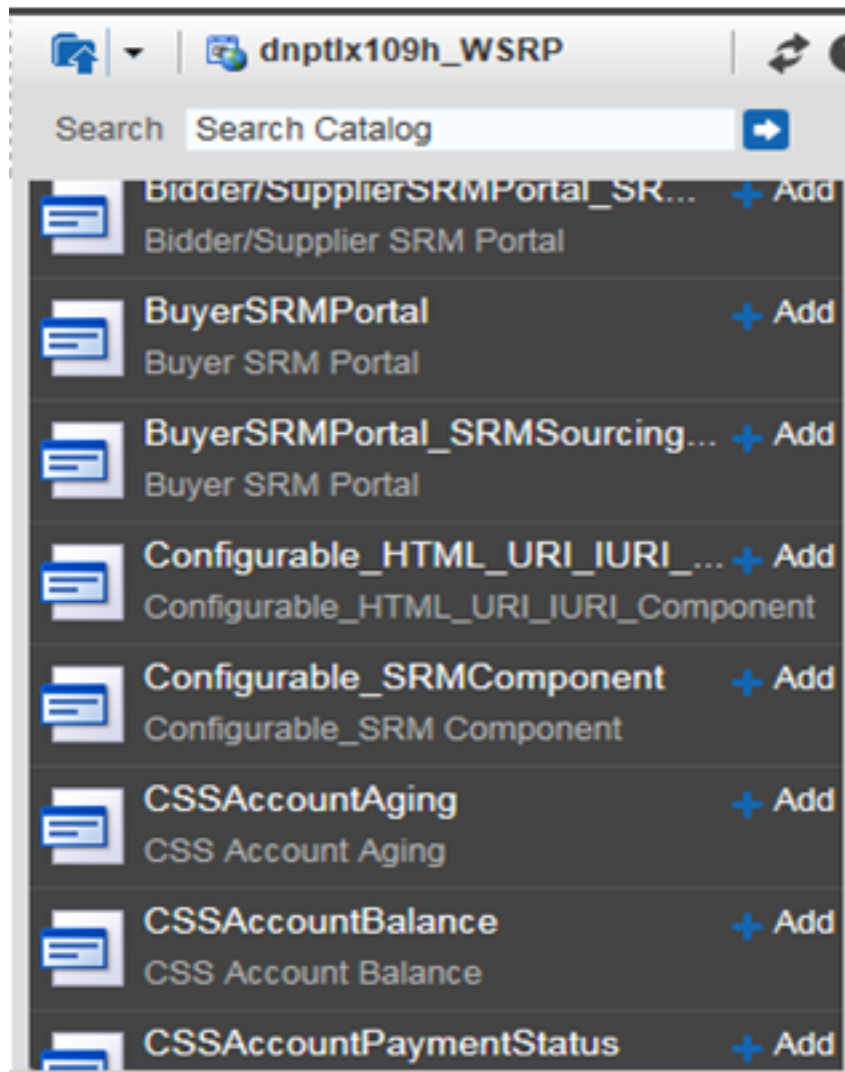

10. Select the EnterpriseOne Portlet from the list and click **Add**.
11. Select the **Edit** icon (wrench button in the top right corner of the portlet) for each portlet and use the pulldown to change the value for **Render Portlet In I Frame** to **True** from the Display Option tab, where the default is value is set to **Auto**.
Note: You must change this setting for each portlet.
12. When the values for each portlet are changed, click the **Save** button.
13. Click the **Close** button.

This completes the steps necessary to access the JD Edwards EnterpriseOne portlets. An example screen is shown below.

The screenshot displays the Oracle WebCenter Portal interface. At the top, there is a navigation bar with the text "WEBCENTER PORTAL > Home Portal" and a search box. Below this, a menu bar contains "Activities", "Documents", "Portals", "Profile", "E1Menu", and "Multiple Portlets". The user's name "JDE JDE" is visible in the top right corner. The main content area is divided into three portlets:

- CSSTasks_ZJDE0001**: Titled "CSS Tasks", it shows the customer "James Black" and a "Tasks" section with a dropdown menu set to "Manage Orders" and a "Go" button.
- CSSSearch_ZJDE0001**: Titled "CSS Search", it has a "Search for:" section with a dropdown menu set to "Orders by Customer PO No." and a "Go" button. Below this, it says "Or Advanced Search for:".
- PrintQueueCenter**: Titled "Print Queue Center", it features a table with columns for "Status", "Report", "Version", "Description", "Date", and "Time". The table shows two records for "Business Unit Report".

At the bottom of the page, there is a footer with links for "About WebCenter Portal", "RSS", "Administrator", "Privacy Statement", and a copyright notice: "Copyright © 2009, 2013, Oracle and/or its affiliates. All rights reserved."

Additional Requirements for the E1Menu Portlet


The E1Menu portlet should not be associated with any other portlets on the same page.

Additional settings are required for the E1Menu portlet on Oracle WebCenter Portal.

To add these additional settings:




1. Select the **Edit** icon from the page (not the one from the portlet).

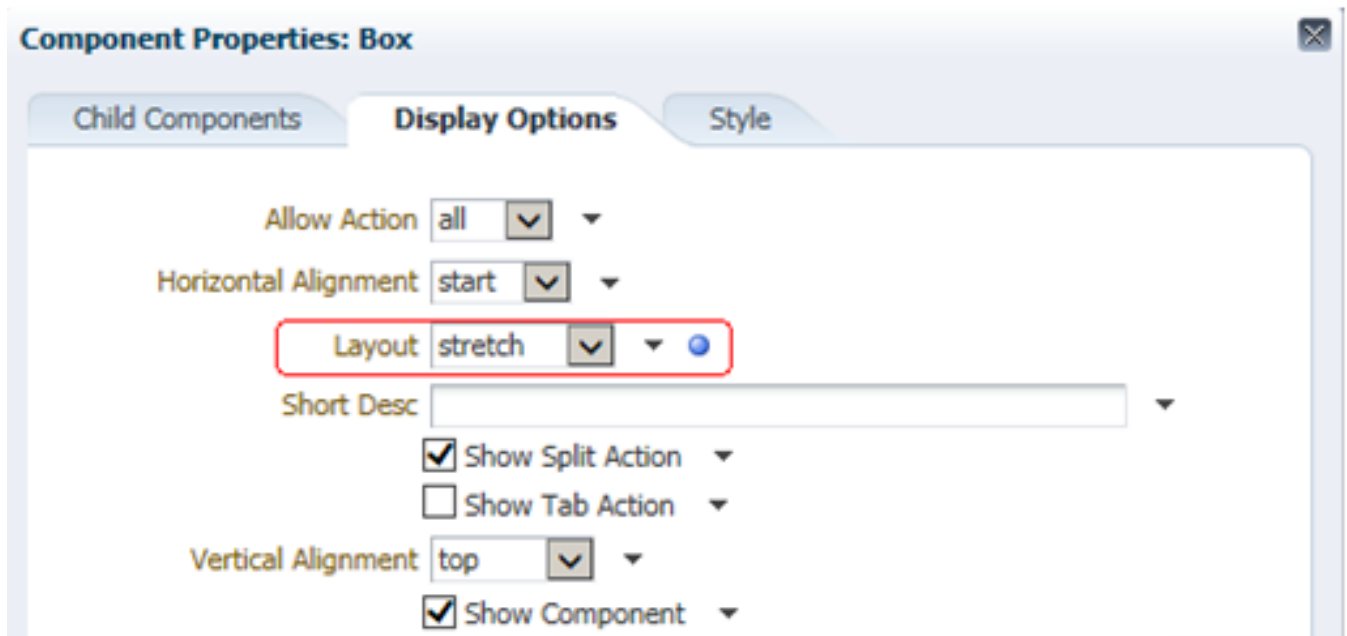

2. Change the Layout to **stretch** from the Display Options tab.

3. Click **Apply**.

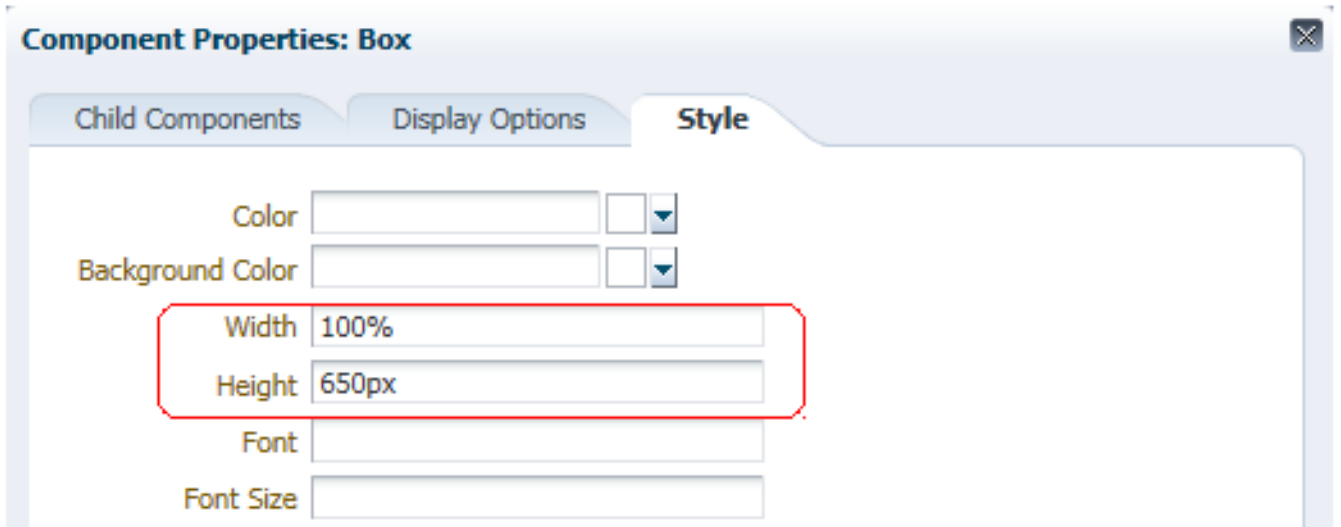

The screenshot shows a dialog box titled "Component Properties: Box" with a close button in the top right corner. It has three tabs: "Child Components", "Display Options", and "Style". The "Style" tab is selected. Below the tabs are several input fields: "Color" and "Background Color" each have a text box and a color selection icon; "Width" is set to "100%"; "Height" is set to "650px"; "Font" and "Font Size" are empty text boxes. A red rectangular box highlights the "Width" and "Height" fields.

4. Change the Width to 100% and Height to 650px (you can adjust the height value based on your display size).
5. Click **Apply** and click **OK**.

6. Click **Save** and **Close**.

The screenshot displays the E1Menu portlet interface. At the top, there is a header for "Chans Global Enterprises Inc." with the tagline "The future of Technology" and a navigation bar containing "Home", "E1Portal", "91E1Menu", and "EnterpriseOne". Below the header is a toolbar with various icons. The main content area is titled "Work With Addresses" and includes a search form with fields for "Alpha Name" and "Search Type" (set to "Customers"). There are also checkboxes for "Display Phone" and "Display Address". Below the search form is a table of records. The table has columns for "Address Number", "Alpha Name", "Long Address", "Industry Class", "Sch Typ", and "Tax ID". The records are numbered 1 through 10.

Address Number	Alpha Name	Long Address	Industry Class	Sch Typ	Tax ID
500	Gas Station	NEIL	7000	C	10117 BERLIN
505	Consignment Agent		5200	C	00186 ROME
700	Gas Station - COP		7000	C	75006 PARIS
705	Consignment Agent - COP-XXXX		5200	C	111 21 STOCKHOLM
3001	Global Enterprises		7000	C	80237
3002	Atlantic Corporation		7000	C	
3003	CSC Corporation		7000	C	
3004	Pacific Company, The		7000	C	
3005	Technology Systems		7000	C	
3006	Editions de l'Odeon		7000	C	

7. Launch the E1Menu Portlet and verify the configuration.

6 Appendix A - Create Database Schemas with Repository Creation Utility

Create Database Schemas with Repository Creation Utility

This appendix discusses creating database schemas with Repository Creation Utility (RCU) 11.1.1.8.0. Prior running this utility, you must have a functioning database such as Oracle database 11g or 12c. RCU is available on only Windows and Linux platforms, but you can create schemas on other supported platforms.

The version of the Repository Creation Utility **MUST** match the product you are installing.

Prerequisites

- You must have a database installed and configured.
 - If your existing database is not UTF-8 format, you will get a warning message that you can ignore.
 - If you are installing a new database, set it to use UTF-8 format.
- You must alter these Oracle database parameters:
 - Alter system set processes=500 scope=spfile
 - Alter system set open_cursors=800 scope=spfile
 - Restart database before running RCU

Launching the Repository Creation Utility

Use these steps to launch the Repository Creation Utility.

1. Download and unzip the *Oracle Fusion Middleware Repository Creation Utility 11g for Windows or Linux* file.
2. Run rcu.bat on Windows or rcu on UNIX from rcuHome/bin folder.

3. Click **Next** on the Welcome page.

The screenshot shows a dialog box titled "Middleware Home Type" with two radio button options: "Use an existing Middleware Home" and "Create a new Middleware Home". The "Create a new Middleware Home" option is selected. Below the options is a large empty rectangular area. At the bottom of the dialog, there is a section titled "Middleware Home Directory" containing a text input field with the path "/u01/Oracle/Middleware" and two buttons: "Browse..." and "Reset".

4. Select the **Create** option and click **Next**.

The screenshot shows the 'Database Connection Details' form. On the left is a navigation pane with the following items: Welcome, Create Repository (highlighted), Database Connection Details (selected), Select Components, Schema Passwords, Map Tablespaces, Summary, and Completion Summary. The main form area contains the following fields:

- Database Type: Oracle Database (dropdown)
- Host Name: database_server (text input). Below the input is the text: 'For RAC database, specify VIP name or one of the Node name as Host name. For SCAN enabled RAC database, specify SCAN host as Host name.'
- Port: 1521 (text input)
- Service Name: ORCL (text input)
- Username: sys (text input). Below the input is the text: 'User with DBA or SYSDBA privileges. Example: sys'
- Password: [masked with asterisks] (password input)
- Role: SYSDBA (dropdown). Below the dropdown is the text: 'One or more components may require SYSDBA role for the operation to succeed.'

5. Enter the database connection information.

The screenshot shows the 'Repository Creation Utility - Checking Prerequisites' dialog box. It displays a table of prerequisites with green checkmarks in the first column and execution times in the second column.

Checking Global Prerequisites	
✓ Initializing repository configuration metadata	00:00.672(ms)
✓ Obtain properties of the specified database	00:00.235(ms)
✓ Check requirement for specified database	00:00.422(ms)
✓ Execute pre create operations	00:00.125(ms)

Below the table is a progress bar and the text: 'Operation completed. Click OK to continue to next page.' An 'OK' button is located at the bottom right of the dialog box.

6. The utility performs a prerequisites check.

A Prefix groups the components associated with one deployment.

Select an existing Prefix

Create a new Prefix


Prefix can contain only alpha-numeric characters. Prefix should not start with a number and should not contain any special characters.

Component	Schema Owner
<input type="checkbox"/> Oracle AS Repository Components	
<input checked="" type="checkbox"/> AS Common Schemas	
<input checked="" type="checkbox"/> Metadata Services	WC8_MDS
<input type="checkbox"/> Audit Services	IAU
<input type="checkbox"/> Audit Services For OES	IAUOES
<input type="checkbox"/> Enterprise Scheduler Service	ESS
<input type="checkbox"/> Oracle Platform Security Services	OPSS
<input type="checkbox"/> Identity Management	
<input type="checkbox"/> WebCenter Content	
<input type="checkbox"/> Oracle Data Integrator	
<input type="checkbox"/> Oracle Business Intelligence	
<input type="checkbox"/> WebLogic Communication Services	
<input type="checkbox"/> SOA and BPM Infrastructure	
<input checked="" type="checkbox"/> WebCenter Portal	
<input checked="" type="checkbox"/> Spaces and Services	WC8_WEBCENTER
<input type="checkbox"/> Portlet Producers	PORTLET
<input type="checkbox"/> Activity Graph and Analytics	ACTMTIES
<input type="checkbox"/> Discussions	DISCUSSIONS
<input type="checkbox"/> Portal and BI	
<input type="checkbox"/> Oracle Social Network	

7. On Select Components, enter the prefix that identifies your environment in the **Create a new Prefix** field.

8. In the Component area, select the schemas you need to create.
 - o For WebCenter - select the Spaces and Services from the WebCenter Portal Section.
 - o For OID - If you are planning to use Oracle Internet Directory as your LDAP server, you can select Oracle Internet Directory from the Identity Management section as well.

Note: You can rerun this utility anytime to add more database schemas for other products.

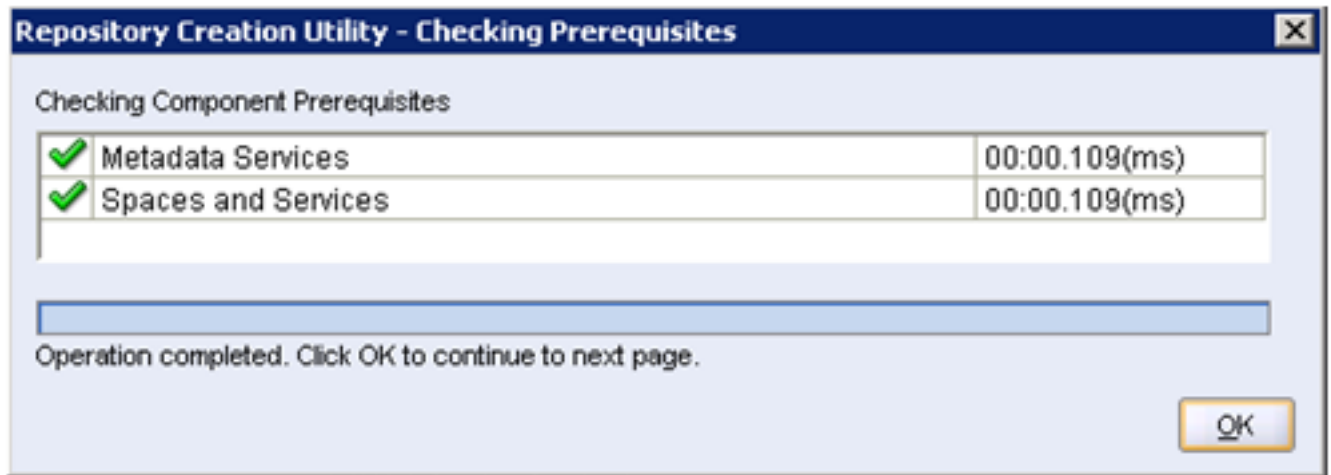

9. The utility performs the prerequisites again.



10. Enter the schema passwords.

Choose tablespaces for the selected components. The default and temporary tablespaces are specified in the table below.
To create new tablespaces or modify existing tablespaces click the 'Manage Tablespaces' button.


Component	Schema Owner	Default Tablespace	Temp Tablespace
Metadata Services	WC8_MDS	*WC8_MDS	*WC8_IAS_TEMP
Spaces and Services	WC8_WEBCENTER	*WC8_IAS_WEBCENTER	*WC8_IAS_TEMP

11. Review the tablespace mapping.

Note: This example shows a different schema prefix than the default, which is DEV.



12. The utility creates any tablespaces that do not already exist.

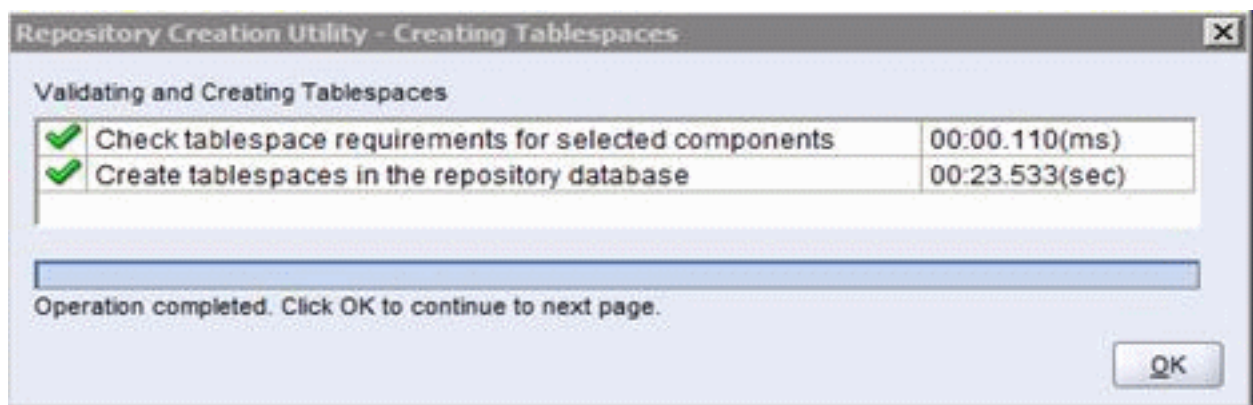

13. The utility validates and creates the tablespaces.
14. Review the summary.

15. Click **Create** to start the tablespaces creation.



16. Click **Close** to exit Repository Creation Utility.

7 Appendix B - Installing WebLogic Server

Prerequisites

- Install a 64-bit JDK 1.7 based on your platform.
- Add the JDK 1.7 location to the system path.

Installing the WebLogic Server

Use these steps to install WebLogic Server 11g.

1. Run the Oracle WebLogic 10.3.6.0 installer from the image that you downloaded from the Oracle Software Delivery Cloud.

The item name of the installer is Oracle WebLogic Server 11gR1 (10.3.6) Generic and Coherence (V29856-01).

The filename of the installer is: wls1036_generic.jar

For Windows, open a command window

```
> java -jar wls1036_generic.jar
```

On UNIX platforms, the command syntax to run the installer is platform dependent.

For Linux and AIX (non-Hybrid JDK)

```
> java -jar wls1036_generic.jar
```

For Solaris and HP-UX (Hybrid JDK)

```
> java -d64 -jar wls1036_generic.jar
```

2. Click **Next** on the Welcome page.


The screenshot shows a configuration window for the Oracle WebLogic Server installation. It is divided into two main sections:

- Middleware Home Type:** This section contains two radio button options:
 - Use an existing Middleware Home
 - Create a new Middleware Home
- Middleware Home Directory:** This section contains a text input field with the path `/u01/Oracle/Middleware` entered. Below the input field are two buttons: **Browse...** and **Reset**.

3. Click **Create a New Middleware Home** option, and then enter the Home Directory.

Register for Security Updates

Provide your email address for security updates and to initiate configuration manager.



Email:

Use My Oracle Support email address/username


I wish to receive security updates via My Oracle Support

Support Password:


4. Enter the contact information for Security Updates.

Choose Install Type

Select the type of installation you wish to perform.




Typical

 Install the following product(s) and component(s):

- WebLogic Server
- Oracle Coherence


Custom

 Choose software products and components to install and perform optional configuration.

5. Select **Typical** as the installation type.

JDK Selection

JDK(s) chosen will be installed. Defaults will be used in script string-substitution if installed.



[Disgard Changes](#)

Bundled JDK:	Approximate installed size*
	Highlighted item:
	All selected bundled JDK's: 0.0 KB
	Total of all selected items: 690.2 MB
	*Installer requires free disk space approximately 2x this total


Local JDK:

- Oracle 1.7.0_45 (/u01/Oracle/jdk1.7.0)

6. Verify the JDK location.

The screenshot shows a configuration window for the Oracle WebLogic Server installation. At the top right, there is a "Discard Changes" button with a circular arrow icon. The window is divided into two main sections. The first section, titled "Middleware Home Directory", contains a text field with the path "/u01/Oracle/Middleware". The second section, titled "Product Installation Directories", contains a warning message: "The Product Home might contain shared utilities and any products or components for which unique directories are not set." Below this message, there are two rows of configuration. The first row is for "WebLogic Server:" and contains a text field with the path "/u01/Oracle/Middleware/wserver_10.3" and a "Browse..." button. The second row is for "Oracle Coherence:" and contains a text field with the path "/u01/Oracle/Middleware/coherence_3.7" and a "Browse..." button.

7. Confirm the install location.

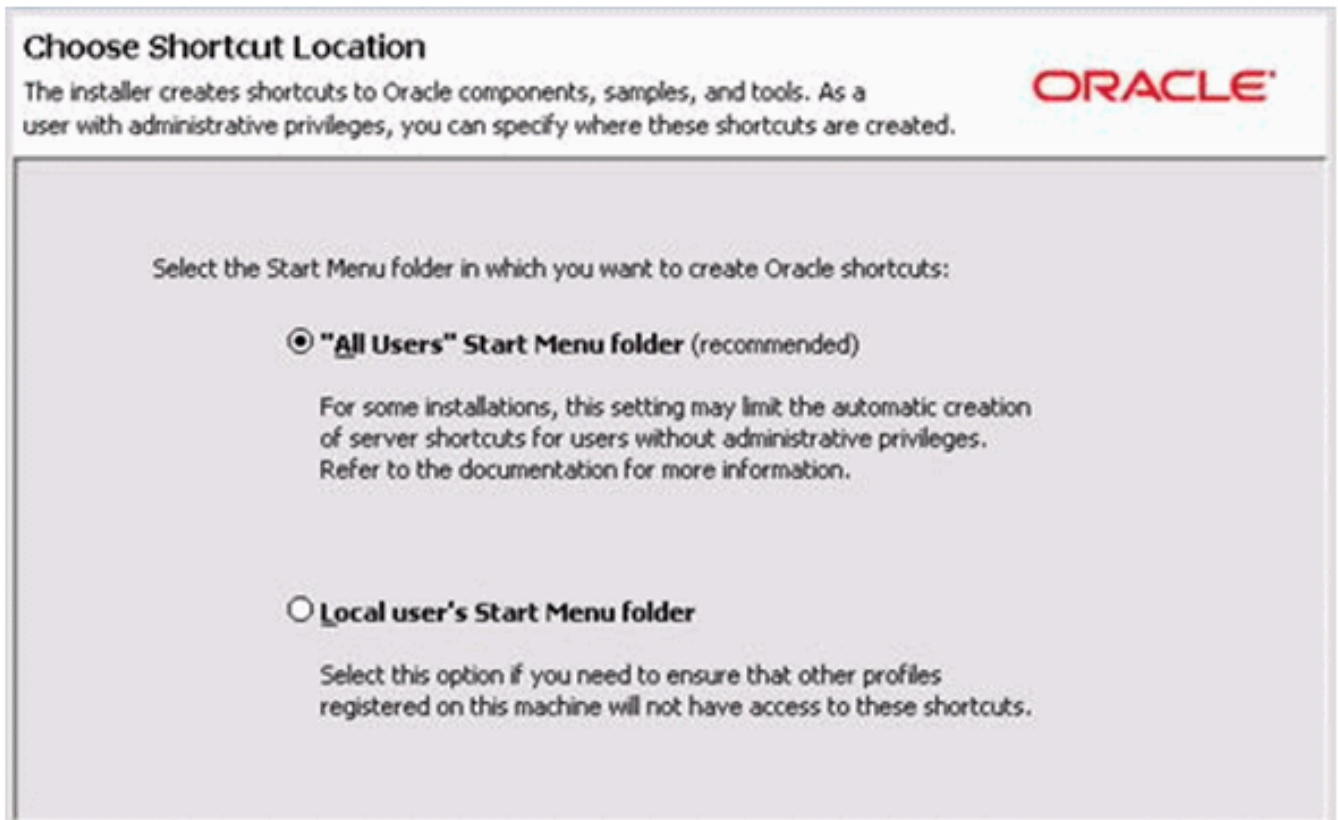

8. On Windows platform, the system prompts you for a shortcut location.


Installation Summary

The following Products and JDKs will be installed.

ORACLE

Approximate Installed Size	
Highlighted item:	693.9 MB
Total of all selected items:	690.3 MB

- Review the Installation Summary page and click **Next**.

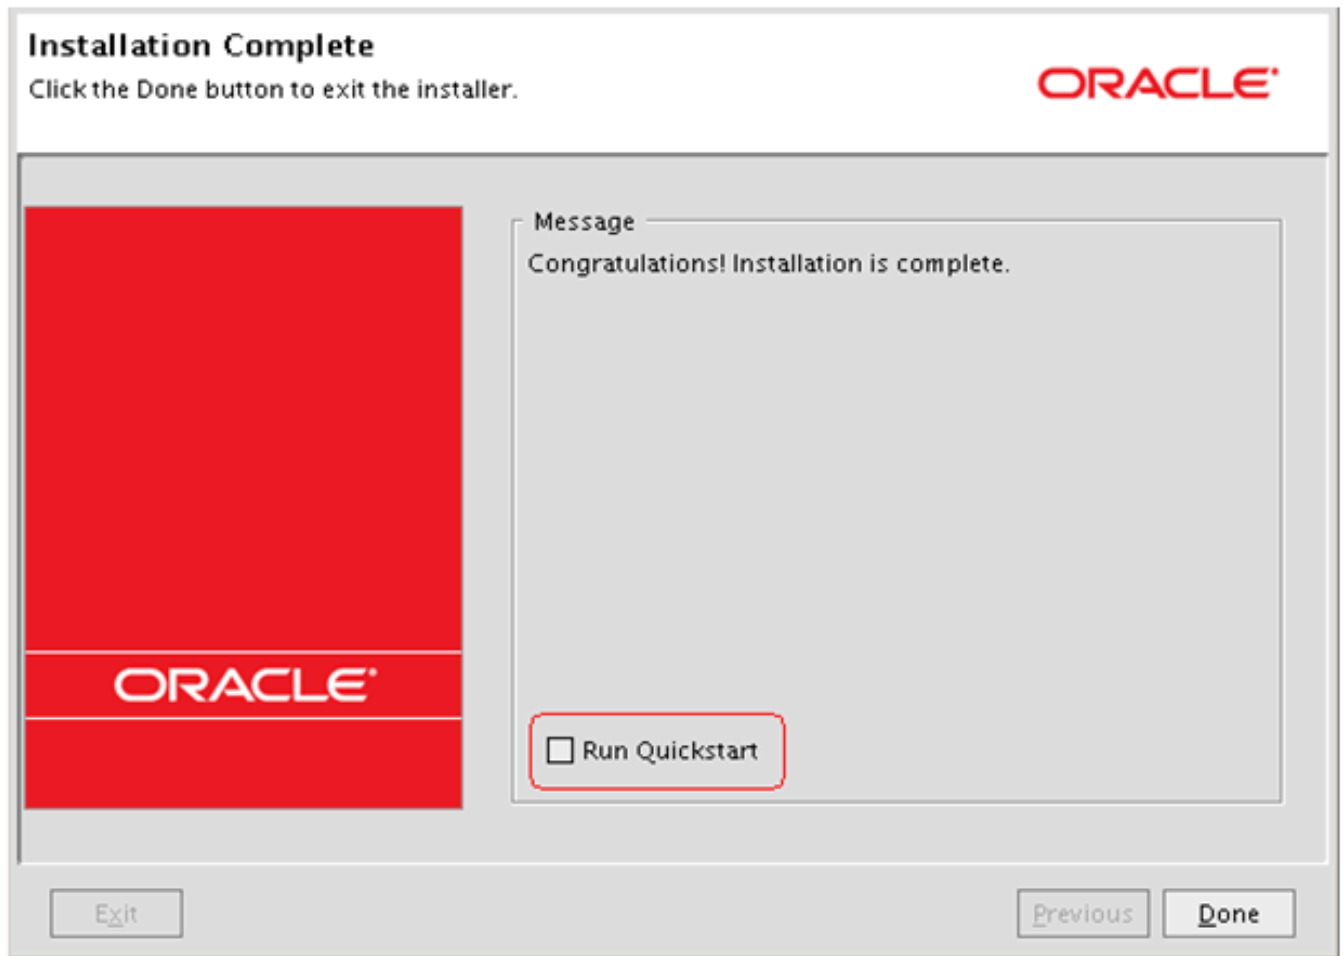

- Un-check the **Run Quickstart** option and click **Done**.

Note: A new domain will be created during the WebCenter installation.

8 Glossary

B2B

Abbreviation for business-to-business.

B2C

Abbreviation for business-to-consumer.

B2E

Abbreviation for business-to-employee.

web service

A web service is a software system designed to support communication between two electronic devices over a network.

WSRP

Abbreviation for Web Services for Remote Portlets.

WSRP Consumer

The WSRP Consumer is a web service client that invokes producer-offered WSRP web services and provides an environment for users to interact with portlets offered by one or more producers.

WSRP Producer

The Producer is a web service that offers one or more portlets and implements various WSRP interfaces and operations. In the JD Edwards EnterpriseOne solution, the JD Edwards EnterpriseOne HTML Web Server is the WSRP producer