

PeopleSoft PeopleTools 8.63

PeopleCode API Reference



G47439-01
July 2026



Copyright © 1988, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Contents

Preface

Understanding the PeopleSoft Online Help and PeopleBooks	i
Using and Managing the PeopleSoft Online Help	iv
PeopleTools Related Links	iv
Contact Us	iv
Follow Us	v

1 Activity Guide Classes

Understanding the Activity Guide Classes	1
Importing Activity Guide Classes	1
Activity Guide Classes Reference	1
List Class	1
List Class Methods	2
createInstance method: List class	2
getActionItems method: List class	3
GetContext method: List class	4
getMembers method: List class	4
GetPglBtn method: List class	5
getRootItems method: List class	5
new method: List class	6
open method: List class	6
save method: List class	7
SaveContext method: List class	7
saveMembers method: List class	8
SavePglBtn method: List class	8
List Class Properties	9
AppClassID property: List class	9
AppClassMethod property: List class	9
DescrLong property: List class	10
Field1 property: List class	10
Field10 property: List class	10
Field2 property: List class	10
Field3 property: List class	10

Field4 property: List class	11
Field5 property: List class	11
Field6 property: List class	11
Field7 property: List class	11
Field8 property: List class	12
Field9 property: List class	12
HomeUrl property: List class	12
isActive property: List class	12
IsTemplate property: List class	13
Label property: List class	13
ListId property: List class	13
NewWindow property: List class	13
PackageRoot property: List class	13
ParentTemplate property: List class	14
pglAppClass property: List class	14
pglPackageRoot property: List class	15
pglProgressBarVisible property: List class	15
pglQualifyPath property: List class	15
QualifyPath property: List class	16
Status property: List class	16
ActionItem Class	17
ActionItem Class Methods	17
delete method: ActionItem class	17
getAssignments method: ActionItem class	18
new method: ActionItem class	19
nextAction method: ActionItem class	19
open method: ActionItem class	20
prevAction method: ActionItem class	20
save method: ActionItem class	20
saveAssignments method: ActionItem class	21
ActionItem Class Properties	22
AppClassID property: ActionItem class	22
AssignedToOprid property: ActionItem class	22
AssignType property: ActionItem class	23
CurrentStep property: ActionItem class	23
DescrLong property: ActionItem class	23
DueDate property: ActionItem class	23
DueTm property: ActionItem class	24
EndDttm property: ActionItem class	24
Field1 property: ActionItem class	24
Field10 property: ActionItem class	24
Field2 property: ActionItem class	25

Field3 property: ActionItem class	25
Field4 property: ActionItem class	25
Field5 property: ActionItem class	25
Field6 property: ActionItem class	25
Field7 property: ActionItem class	26
Field8 property: ActionItem class	26
Field9 property: ActionItem class	26
ItemId property: ActionItem class	26
Label property: ActionItem class	27
ListId property: ActionItem class	27
PackageRoot property: ActionItem class	27
ParentId property: ActionItem class	28
PercCompl property: ActionItem class	28
Priority property: ActionItem class	28
QualifyPath property: ActionItem class	28
Remarks property: ActionItem class	29
Required property: ActionItem class	29
Sequence property: ActionItem class	29
ServiceId property: ActionItem class	29
StartDt property: ActionItem class	30
StartTm property: ActionItem class	30
Status property: ActionItem class	30
Summary property: ActionItem class	31
Type property: ActionItem class	31
ActionItemAssignments Class	31
ActionItemAssignments Class Methods	32
IsEqual method: ActionItemAssignments class	32
ActionItemAssignments Class Properties	32
AssignType property: ActionItemAssignments class	32
AssignValue property: ActionItemAssignments class	32
Member Class	32
Member Class Methods	33
IsEqual method: Member class	33
Member method: Member class	33
Member Class Properties	34
Name property: Member class	34
PrivilegeSetID property: Member class	34
Type property: Member class	35
ContextData Class	35
ContextData Class Methods	35
ContextData method: ContextData class	35
IsEqual method: ContextData class	36

ContextData Class Properties	36
ctxKey property: ContextData class	36
ctxVisible property: ContextData class	37
fieldname property: ContextData class	37
keyLabel property: ContextData class	37
keyValue property: ContextData class	37
recname property: ContextData class	37

2 AESection Class

Understanding the AESection Class	1
How an AESection is Accessed	2
AESection Example	3
Data Type of an AESection Object	4
Scope of an AESection Object	4
AESection Class Built-in Function	5
AESection Class Methods	5
AddStep method: AESection class	5
Close method: AESection class	6
Open method: AESection class	6
Save method: AESection class	8
SetSQL method: AESection class	9
SetTemplate method: AESection class	10
AESection Class Property	11
IsOpen property: AESection class	11

3 Analytic Calculation Engine Classes

Understanding the Analytic Calculation Engine Classes	1
Using the Analytic Calculation Engine Classes with Application Engine	2
Running Synchronously	2
Using Trees	2
Error Handling	3
Data Types for Analytic Calculation Engine Classes	3
Scope of Analytic Calculation Engine Classes	3
Analytic Calculation Engine Classes Built-in Functions	4
AnalyticInstance Class Methods	4
CheckAsyncStatus method: AnalyticInstance class	4
CheckStatus method: AnalyticInstance class	5
Copy method: AnalyticInstance class	5
Delete method: AnalyticInstance class	6
GetAnalyticModel method: AnalyticInstance class	7

Load method: AnalyticInstance class	8
RunAsync method: AnalyticInstance class	9
RunSync method: AnalyticInstance class	9
Terminate method: AnalyticInstance class	10
Unload method: AnalyticInstance class	10
AnalyticInstance Class Properties	11
AnalyticType property: AnalyticInstance class	11
ID property: AnalyticInstance class	11
Messages property: AnalyticInstance class	11
AnalyticModel Class Methods	12
AddMember method: AnalyticModel class	12
AttachTree method: AnalyticModel class	12
CalculateCube method: AnalyticModel class	14
DetachTree method: AnalyticModel class	15
GetCubeCollection method: AnalyticModel class	15
GetCellProperties method: AnalyticModel class	16
GetMembers method: AnalyticModel class	17
GetTree method: AnalyticModel class	18
Recalculate method: AnalyticModel class	19
RenameMember method: AnalyticModel class	20
AnalyticModel Class Property	20
Messages property: AnalyticModel class	20
CubeCollection Class	21
CubeCollection Class Methods	21
CollapseNode method: CubeCollection class	21
DrillIntoNode method: CubeCollection class	22
DrillOutOfNode method: CubeCollection class	22
ExpandNode method: CubeCollection class	23
GetData method: CubeCollection class	24
GetDimFilter method: CubeCollection class	25
GetDimSort method: CubeCollection class	26
GetLayout method: CubeCollection class	27
GetRowCount method: CubeCollection class	27
GetSlice method: CubeCollection class	28
SetData method: CubeCollection class	28
SetDimensionOrder method: CubeCollection class	29
SetDimFilter method: CubeCollection class	29
SetDimSort method: CubeCollection class	30
SetSlice method: CubeCollection class	31
ShowHierarchy method: CubeCollection class	31
UnsetDimFilter method: CubeCollection class	32
UnsetDimSort method: CubeCollection class	33

CubeCollection Class Property	33
Messages property: CubeCollection class	34

4 Analytic Calculation Engine Metadata Classes

Understanding the PeopleSoft Analytic Calculation Engine Metadata Classes	1
Using the Analytic Calculation Engine Metadata Classes	2
Inserting and Deleting Objects	2
Building a Rule as an Object	2
Error Handling	3
Data Types of the Analytic Calculation Engine Metadata Objects	3
Scope of Analytic Calculation Engine Metadata Objects	3
How to Import the Analytic Calculation Engine Metadata Classes	3
How to Create an Analytic Calculation Engine Metadata Class Object	4
Analytic Calculation Engine Metadata Classes Constructor	5
AnalyticModelDefn method: AnalyticModelDefn class	5
AnalyticModelDefn Class	6
AnalyticModelDefn Class Methods	6
AddCube method: AnalyticModelDefn class	6
AddCubeCollection method: AnalyticModelDefn class	7
AddDimension method: AnalyticModelDefn class	7
AddExplicitDimensionSet method: AnalyticModelDefn class	8
AddOrganizer method: AnalyticModelDefn class	8
AddUserFunction method: AnalyticModelDefn class	9
CopyCube method: AnalyticModelDefn class	10
CopyCubeCollection method: AnalyticModelDefn class	10
CopyDimension method: AnalyticModelDefn class	11
CopyExplicitDimensionSet method: AnalyticModelDefn class	12
CopyTo method: AnalyticModelDefn class	12
CopyUserFunction method: AnalyticModelDefn class	13
Create method: AnalyticModelDefn class	14
Delete method: AnalyticModelDefn class	14
DeleteCube method: AnalyticModelDefn class	15
DeleteCubeCollection method: AnalyticModelDefn class	16
DeleteDimension method: AnalyticModelDefn class	17
DeleteExplicitDimensionSet method: AnalyticModelDefn class	17
DeleteOrganizer method: AnalyticModelDefn class	18
DeleteUserFunction method: AnalyticModelDefn class	19
Get method: AnalyticModelDefn class	19
GetCube method: AnalyticModelDefn class	20
GetCubeCollection method: AnalyticModelDefn class	21
GetCubeCollectionNames method: AnalyticModelDefn class	21

GetCubeNames method: AnalyticModelDefn class	22
GetDimension method: AnalyticModelDefn class	23
GetDimensionNames method: AnalyticModelDefn class	24
GetExplicitDimensionSet method: AnalyticModelDefn class	24
GetExplicitDimensionSetNames method: AnalyticModelDefn class	25
GetOrganizer method: AnalyticModelDefn class	25
GetOrganizerNames method: AnalyticModelDefn class	26
GetUserFunction method: AnalyticModelDefn class	27
GetUserFunctionNames method: AnalyticModelDefn class	27
Rename method: AnalyticModelDefn class	28
RenameCube method: AnalyticModelDefn class	29
RenameCubeCollection method: AnalyticModelDefn class	30
RenameDimension method: AnalyticModelDefn class	30
RenameExplicitDimensionSet method: AnalyticModelDefn class	31
RenameOrganizer method: AnalyticModelDefn class	32
RenameUserFunction method: AnalyticModelDefn class	33
Save method: AnalyticModelDefn class	33
Validate method: AnalyticModelDefn class	34
AnalyticModelDefn Properties	35
CircularFormulaWarn property: AnalyticModelDefn class	35
Description property: AnalyticModelDefn class	35
IsValid property: AnalyticModelDefn class	35
LongDescription property: AnalyticModelDefn class	35
MaxDelta property: AnalyticModelDefn class	35
MaxIterations property: AnalyticModelDefn class	36
Messages property: AnalyticModelDefn class	36
Name property: AnalyticModelDefn class	36
ResolveCircularDeps property: AnalyticModelDefn class	37
DimensionDefn Class	37
DimensionDefn Class Properties	37
AggregateSequence property: DimensionDefn class	37
AggregationUserFunction property: DimensionDefn class	37
Comments property: DimensionDefn class	37
Name property: DimensionDefn class	38
TotalMemberName property: DimensionDefn class	38
ExplicitDimensionSet Class	38
ExplicitDimensionSet Methods	38
AttachDimension method: ExplicitDimensionSet class	38
DetachDimension method: ExplicitDimensionSet class	39
GetDimensionNames method: ExplicitDimensionSet class	39
ExplicitDimensionSet Properties	40
Name property: ExplicitDimensionSet class	40

SequenceNumber property: ExplicitDimensionSet class	40
CubeDefn Class	40
CubeDefn Class Methods	40
AttachDimension method: CubeDefn class	40
DetachDimension method: CubeDefn class	41
GetCauses method: CubeDefn class	42
GetCircularDeps method: CubeDefn class	42
GetDimensionAggregate method: CubeDefn class	43
GetEffects method: CubeDefn class	43
GetDimensionNames method: CubeDefn class	44
GetRule method: CubeDefn class	45
SetDimensionAggregate method: CubeDefn class	45
SetRule method: CubeDefn class	46
UsesDimension method: CubeDefn class	46
CubeDefn Class Properties	47
CalcAggregates property: CubeDefn class	47
Comments property: CubeDefn class	47
DimensionCount property: CubeDefn class	47
FormatType property: CubeDefn class	47
IsVirtual property: CubeDefn class	48
Name property: CubeDefn class	48
ValueDimensionName property: CubeDefn class	48
CubeCollectionDefn Class	48
CubeCollectionDefn Class Methods	48
AttachCube method: CubeCollectionDefn class	49
DetachCube method: CubeCollectionDefn class	49
GetAggregateMapping method: CubeCollectionDefn class	50
GetCubeNames method: CubeCollectionDefn class	50
GetDimensionNames method: CubeCollectionDefn class	51
GetDimSort method: CubeCollectionDefn class	52
GetFieldMapping method: CubeCollectionDefn class	53
GetFilter method: CubeCollectionDefn class	53
GetPersistAggregate method: CubeCollectionDefn class	54
SetAggregateMapping method: CubeCollectionDefn class	54
SetDimSort method: CubeCollectionDefn class	55
SetFieldMapping method: CubeCollectionDefn class	56
SetFilter method: CubeCollectionDefn class	57
SetPersistAggregate method: CubeCollectionDefn class	58
UsesCube method: CubeCollectionDefn class	58
UsesDimension method: CubeCollectionDefn class	59
CubeCollectionDefn Class Properties	60
AggregateRecName property: CubeCollectionDefn class	60

Comments property: CubeCollectionDefn class	60
CubeCount property: CubeCollectionDefn class	60
DimensionCount property: CubeCollectionDefn class	60
Name property: CubeCollectionDefn class	60
RecordName property: CubeCollectionDefn class	61
UserFunctionDefn Class	61
UserFunctionDefn Class Methods	61
GetRule method: UserDefn class	61
SetRule method: UserDefn class	62
UserFunctionDefn Class Properties	62
Comments property: UserFunctionDefn class	62
Name property: UserFunctionDefn class	62
OrganizerDefn Class	62
OrganizerDefn Class Methods	63
AttachPart method: OrganizerDefn class	63
DetachPart method: OrganizerDefn class	63
GetPartNames method: OrganizerDefn class	64
UsesPart method: OrganizerDefn class	65
OrganizerDefn Class Properties	65
Comments	65
Name	66
RuleDefn Class	66
RuleDefn Class Methods	66
AddRuleExpression method: RuleDefn class	66
GenerateRule method: RuleDefn class	67
RuleDefn Class Property	67
RuleString property: RuleDefn class	67
RuleExpressions Classes	67
Using the Constants Class	68
Assignment Class	68
Assignment Class Method	68
GenerateRule method: Assignment class	69
Assignment Class Properties	69
Expression property: Assignment class	69
Variable property: Assignment class	69
Comparison Class	69
Comparison Class Method	70
GenerateRule method: Comparison class	70
Comparison Class Properties	71
Operand1 property: Comparison class	71
Operand2 property: Comparison class	71
Type property: Comparison class	71

Constant Class	72
Constant Class Method	73
GenerateRule method: Constant class	73
Constant Class Properties	73
Type property: Constant class	74
Value property: Constant class	74
Constants Class	74
Cube Class	74
Cube Class Methods	74
AddIndex method: Cube class	75
GenerateRule method: Cube class	75
GetIndexes method: Cube class	75
Cube Class Property	76
Name property: Cube class	76
ExpressionBlock Class	76
ExpressionBlock Methods	76
AddRuleExpression method: ExpressionBlock class	77
GetRuleExpressions method: ExpressionBlock class	77
FunctionCall Class	77
FunctionCall Class Methods	81
AddArgument method: FunctionCall class	81
GenerateRule method: FunctionCall class	81
GetArguments method: FunctionCall class	82
FunctionCall Class Properties	82
Name property: FunctionCall class	82
Type property: FunctionCall class	82
MemberReference Class	82
MemberReference Class Method	83
GenerateRule method: MemberReference class	83
MemberReference Class Properties	83
Dimension property: MemberReference class	83
Member property: MemberReference class	83
Operation Class	84
Operation Class Method	84
GenerateRule method: Operation class	84
Operation Class Properties	85
Operand1 property: Operation class	85
Operand2 property: Operation class	85
Type property: Operation class	85
Variable Class	86
Variable Class Method	86
GenerateRule method: Variable class	86

Variable Class Properties	87
Name property: Variable class	87
Type property: Variable class	87
Analytic Model Metadata Classes Examples	87
Creating an Analytic Model Code Example	87

5 Analytic Grid Classes

Understanding the Analytic Calculation Engine Classes	1
Using the Analytic Grid in PeopleCode	2
Using Freeze Column Mode	3
Error Handling	3
Data Types of the Analytic Grid Objects	4
Scope of Analytic Grid Objects	4
AnalyticGrid Class Reference	4
AnalyticGrid Class Built-in Function	4
AnalyticGrid Class Methods	4
GetColumn method: AnalyticGrid class	5
GetCubeCollection method: AnalyticGrid class	6
LoadData method: AnalyticGrid class	6
SetAnalyticInstance method: AnalyticGrid class	7
SetLayout method: AnalyticGrid class	8
AnalyticGrid Class Properties	8
Inactive property: AnalyticGrid class	9
Label property: AnalyticGrid class	9
ShowGridLines property: AnalyticGrid class	9
SlicerVisible property: AnalyticGrid class	9
SummaryText property: AnalyticGrid class	10

6 Analytic Type Classes

Understanding the Analytic Calculation Engine Classes	1
Using the Analytic Type Classes	2
Error Handling	2
Data Types of the Analytic Type Objects	2
Scope of Analytic Type Objects	2
How to Import the Analytic Type Classes	3
How to Create an Analytic Type Class Object	3
Analytic Type Classes Constructor	4
AnalyticTypeDefn function	4
AnalyticTypeDefn Class Methods	4
AddModel method: AnalyticTypeDefn class	4

AddRecord method: AnalyticTypeDefn class	5
Create method: AnalyticTypeDefn class	6
CopyTo method: AnalyticTypeDefn class	6
Delete method: AnalyticTypeDefn class	7
DeleteModel method: AnalyticTypeDefn class	7
DeleteRecord method: AnalyticTypeDefn class	8
Get method: AnalyticTypeDefn class	9
GetModel method: AnalyticTypeDefn class	9
GetModelNames method: AnalyticTypeDefn class	10
GetRecord method: AnalyticTypeDefn class	10
GetRecordNames method: AnalyticTypeDefn class	11
Rename method: AnalyticTypeDefn class	11
Save method: AnalyticTypeDefn class	12
AnalyticTypeDefn Class Properties	12
AppClassPath property: AnalyticTypeDefn class	12
Comments property: AnalyticTypeDefn class	12
Description property: AnalyticTypeDefn class	12
Name property: AnalyticTypeDefn class	13
OwnerID property: AnalyticTypeDefn class	13
AnalyticTypeModelDefn Class Properties	13
Name method: AnalyticTypeModelDefn class	13
Type method: AnalyticTypeModelDefn class	13
AnalyticTypeRecordDefn Class Methods	13
GetSelectedField method: AnalyticTypeRecordDefn class	14
SetSelectedField method: AnalyticTypeRecordDefn class	14
UnsetSelectedField method: AnalyticTypeRecordDefn class	14
AnalyticTypeRecordDefn Class Properties	15
Callback property: AnalyticTypeRecordDefn class	15
Description property: AnalyticTypeRecordDefn class	15
Name property: AnalyticTypeRecordDefn class	15
Readable property: AnalyticTypeRecordDefn class	16
ReadOnce property: AnalyticTypeRecordDefn class	16
ScenarioManaged property: AnalyticTypeRecordDefn class	16
SyncOrder property: AnalyticTypeRecordDefn class	16
Writeable property: AnalyticTypeRecordDefn class	16
AnalyticType Classes Example	16

7 Application Classes

Understanding Application Classes	1
When Would You Use Application Classes?	1
Application Classes General Structure	2

Class Name	2
Class Extension	3
Declaration of Public External Interface	4
Access Control and the Declaration of Protected Properties and Methods	5
Declaration of Private Instance Variables and Methods	8
Definition of Methods	9
Declaration of Abstract Methods and Properties	12
Interfaces	13
Constructors	14
External Function Declarations	17
Naming Standards	18
Naming Packages	18
Naming Classes	18
Naming Methods	18
Naming Properties	19
Import Declarations	19
Self-Reference	20
Using %This with Constructors	22
Properties and Constants	23
Differentiating Between Properties and Methods	23
Overriding Properties	24
Using Get and Set with Properties	25
Using Read-Only Properties	25
Using Methods and Properties for Collections	26
Declaring Constants	26
Using Variables in Application Classes	26
Placement of Variable Declarations	27
Declaring Private Instance Variables	27
Global Variables	27
Overriding Variables and Properties	27
Superclass Reference	28
Downcasting	28
Exception Handling	30
Commenting and Documenting Application Classes	30
Understanding Comments and Documentation	31
Method Header Comments	31
Class Header Comments	32
Designing Base Classes	32
Base Classes	32
Abstract Base Classes	33
Generic Base Classes	33
Utility Classes	33

Declaration of Application Classes	33
Declaring Application Classes	34
Importing Class Names	34
Referencing Superclasses	34
Declaring Private Methods	34
Scope of an Application Class	34
Application Classes Built-in Functions and Language Constructs	34
class function	35
get function	37
import function	37
interface function	38
method function	39
property function	40
set function	40

8 Application Data Set Classes

Understanding the Application Data Set Classes	1
Importing Application Data Set Classes	2
AdsValidationBase Class	2
AdsValidationBase Class Methods	2
AdsValidationBase method: AdsValidationBase class	2
DoADSValidations method: AdsValidationBase class	3
OnPreCopyCompare method: AdsValidationBase class	5
OnPreUpdate method: AdsValidationBase class	6
OnPostCopy method: AdsValidationBase class	7
ReportErrorModified method: AdsValidationBase class	9

9 Application Services Framework Classes

ServiceAPI Class	1
ServiceAPI Methods	1
clearRequestHeaders method: Service API class	1
getInputParameter method: ServiceAPI class	2
getInputRow method: ServiceAPI class	2
getInputRowCount method: ServiceAPI class	3
getLocationURL method: ServiceAPI class	3
getOutputContentData method: ServiceAPI class	4
getOutputParameter method: ServiceAPI class	4
getOutputRow method: ServiceAPI class	5
getOutputRowCount method: ServiceAPI class	6
getRequestHeaderValue method: ServiceAPI class	6

getTemplateParameter method: ServiceAPI class	7
InsertOutputRow method: ServiceAPI class	7
loadRequestHeaders method: ServiceAPI class	8
setInputParameter method: ServiceAPI class	8
setLocationTemplateParameter method: ServiceAPI class	9
setOutputParameter method: ServiceAPI class	10
setOverrideURL method: ServiceAPI class	11
setRequestHeader method: ServiceAPI class	12
setResponseHeader method: ServiceAPI class	12
setTemplateParameter method: ServiceAPI class	13
ServiceAPI Properties	14
HttpMethod property: ServiceAPI class	14
HttpStatusCode property: ServiceAPI class	14
InputRows property: ServiceAPI class	14
IsChatbot property: ServiceAPI class	15
OutputRows property: ServiceAPI class	15
OverrideResultStateDesc property: ServiceAPI class	15
ResponseException property: ServiceAPI class	15
ResponseFailed property: ServiceAPI class	16
ResultState property: ServiceAPI class	16
RootResource property: ServiceAPI class	16
ServiceID property: ServiceAPI class	16
URIIndex property: ServiceAPI class	17
UserException property: ServiceAPI class	17

10 API Repository

Understanding the PeopleSoft API Repository	1
The PeopleSoft API Repository	1
Example of Accessing the Repository Using PeopleCode	1
Example of Accessing the Repository by Using Visual Basic	5
Repository Properties	6
Bindings property: repository class	6
Namespaces property: repository class	6
Bindings Collection Properties	6
Count property: Bindings collection	7
Bindings Collection Methods	7
Item method: Bindings collection	7
Bindings Properties	8
Name property: Binding class	8
Bindings Methods	8
Generate method: Binding class	8

Namespaces Collection Properties	8
Count property: NameSpace collection	8
Namespaces Collection Methods	9
Item method: Namespace collection	9
ItemByName method: Namespace collection	9
Namespaces Properties	10
Classes property: Namespace class	10
Name property: Namespace class	10
Namespaces Methods	10
CreateObject method: NameSpace class	11
ClassInfo Collection Properties	11
Count property: ClassInfo collection	11
ClassInfo Collection Methods	11
Item method: ClassInfo collection	11
ItemByName method: ClassInfo collection	12
ClassInfo Properties	12
Documentation property: ClassInfo class	13
Methods property: ClassInfo class	13
Name property: ClassInfo class	13
Properties property: ClassInfo class	13
MethodInfo Collection Properties	13
Count property: MethodInfo collection	13
MethodInfo Collection Methods	14
Item method: MethodInfo collection	14
ItemByName method: MethodInfo collection	15
MethodInfo Properties	15
Arguments property: MethodInfo class	15
Documentation property: MethodInfo class	15
Name property: MethodInfo class	16
Type property: MethodInfo class	16
PropertyInfo Collection Properties	16
Count property: PropertyInfo collection	16
PropertyInfo Collection Methods	17
Item method: PropertyInfo collection	17
ItemByName method: PropertyInfo collection	17
PropertyInfo Properties	18
Documentation property: PropertyInfo class	18
Name property: PropertyInfo class	18
Type property: PropertyInfo class	18
Usage property: PropertyInfo class	18

11 Array Class

Understanding Arrays	1
Creating Arrays	1
Populating an Array	3
Removing Items From an Array	4
Creating Empty Arrays	4
Creating and Populating Multi-Dimensional Arrays	5
Using Flattening and Promotion	7
Declaring Array Objects	8
Understanding the Scope of an Array Object	8
Array Class Built-in Functions	8
Array Class Methods	8
Clone method: Array class	8
Find method: Array class	9
Get method: Array class	11
Join method: Array class	11
Next method: Array class	14
Pop method: Array class	15
Push method: Array class	16
Replace method: Array class	17
Reverse method: Array class	19
Set method: Array class	20
Shift method: Array class	21
Sort method: Array class	21
Subarray method: Array class	24
Substitute method: Array class	25
Unshift method: Array class	26
Array Class Properties	27
Dimension property: Array class	27
Len property: Array class	27

12 BannerTile Class

BannerTile Class	1
BannerTile Class Methods	1
ApplyVisuals method: BannerTile class	1
BannerTile method: BannerTile class	2
ClearContextString method: BannerTile class	2
DeleteContext method: BannerTile class	3
DeleteContextAndUpdate method: BannerTile class	4
DeleteKey method: BannerTile class	5

GetBannerLabel method: BannerTile class	5
GetContextString method: BannerTile class	6
GetGroupletURL method: BannerTile class	7
GetKeyValue method: BannerTile class	7
IsKeyExist method: BannerTile class	8
OverrideDefaultProperties method: BannerTile class	8
SetDefaultContext method: BannerTile class	9
SetKeyValue method: BannerTile class	10
UpdateContext method: BannerTile class	11
BannerTile Class Properties	11
AnnounceText property: BannerTile class	12
HomepageId property: BannerTile class	12
HomepageName property: BannerTile class	13
IsExpanded property: BannerTile class	13
IsPersistContext property: BannerTile class	13
KeyVals property: BannerTile class	14
NodeName property: BannerTile class	14
PortalName property: BannerTile class	15

13 BI Publisher Classes

Understanding BI Publisher and the BI Publisher Classes	1
BI Publisher Terms	2
BI Publisher Flow Diagram	2
Error Handling	3
Data Type and Scope of BI Publisher Objects	3
Instantiating BI Publisher Objects	3
Search Operator Values	4
BI Publisher Classes Reference	5
BI Publisher Report Manager Definition Classes	5
ReportDefn Class	5
ReportDefn Class Constructor	5
ReportDefn method: ReportDefn class	5
ReportDefn Class Methods	6
Close method: ReportDefn class	6
DisplayOutput method: ReportDefn class	7
EmailOutput method: ReportDefn class	7
Get method: ReportDefn class	8
GetOutDestFormatString method: ReportDefn class	9
GetPSQueryPromptRecord method: ReportDefn class	9
PrintOutput method: ReportDefn class	10
ProcessReport method: ReportDefn class	10

Publish method: ReportDefn class	12
setPDFConversionFiles method: ReportDefn class	13
setPDFConversionPageNumbering method: ReportDefn class	13
setPDFConversionTimeout method: ReportDefn class	14
SetPrinterType method: ReportDefn class	15
SetPSQueryPromptRecord method: ReportDefn class	15
SetRuntimeDataXMLFile method: ReportDefn class	16
SetRuntimeProperties method: ReportDefn class	17
ReportDefn Class Properties	19
Description property: ReportDefn class	19
DestinationPrinter property: ReportDefn class	19
FolderName property: ReportDefn class	19
OutDestination property: ReportDefn class	19
OutDestinationType property: ReportDefn class	20
ProcessInstance property: ReportDefn class	20
ReportFileName property: ReportDefn class	20
Status property: ReportDefn class	21
UseBurstValueAsOutputFileName property: ReportDefn class	21
BI Publisher Report Manager Search Classes	21
Report Class	21
Report Class Constructor	22
Report method: Report class	22
Report Class Properties	23
contentId property: Report class	23
CreatedDateTime property: Report class	23
DatabaseName property: Report class	23
Description property: Report class	23
ExpireDate property: Report class	23
FileURL property: Report class	24
FolderName property: Report class	24
ProcessInstanceID property: Report class	24
ReportInstanceID property: Report class	24
ReportName property: Report class	24
ReportURL property: Report class	25
ReportManager Class	25
ReportManager Class Constructor	25
ReportManager method: ReportManager class	25
ReportManager Class Methods	26
AddSearchFieldCriteria method: ReportManager class	26
GetReportList method: ReportManager class	26
SetBurstFieldCriteria method: ReportManager class	27
SetCaseSensitive method: ReportManager class	27

SetDateCriteria method: ReportManager class	28
SetFolderCriteria method: ReportManager class	29
SetProcessInstanceCriteria method: ReportManager class	29
SetReportIDCriteria method: ReportManager class	30
SetUserIdCriteria method: ReportManager class	30
SearchAttribute Class	30
SearchAttribute Class Constructor	31
SearchAttribute method: SearchAttribute class	31
SearchAttribute Class Properties	31
attrName property: SearchAttribute class	31
attrValue property: SearchAttribute class	32
compareOp property: SearchAttribute class	32
BI Publisher Engine Classes	32
PageNumber Class	32
PageNumber Class Constructor	32
PageNumber method: PageNumber class	32
PageNumber Class Properties	33
BackgroundFile property: PageNumber class	33
FontName property: PageNumber class	33
FontSize property: PageNumber class	34
PositionX property: PageNumber class	34
PositionY property: PageNumber class	34
StartFromPageNum property: PageNumber class	35
StartNum property: PageNumber class	35
PDFMerger Class	35
PDFMerger Class Constructor	35
PDFMerger method: PDFMerger class	35
PDFMerger Class Methods	36
isPDFValid method: PDFMerger class	36
MergePDFs method: PDFMerger class	37
PDFMerger Class Properties	38
ConfProp property: PDFMerger class	38
Locale property: PDFMerger class	38
PageNumber property: PDFMerger class	38
Watermark property: PDFMerger class	39
Properties Class	39
Properties Class Constructor	40
Properties method: Properties class	40
Properties Class Methods	40
GetProperty method: Properties class	40
SetProperty method: Properties class	41
Watermark Class	41

Watermark Class Constructor	42
Watermark method: Watermark class	42
Watermark Class Properties	43
ImageFile property: Watermark class	43
ImageFileLowerLeftX property: Watermark class	43
ImageFileLowerLeftY property: Watermark class	43
ImageFileUpperRightX property: Watermark class	43
ImageFileUpperRightY property: Watermark class	43
PageIndex property: Watermark class	44
Text property: Watermark class	44
TextAngle property: Watermark class	44
TextFontName property: Watermark class	44
TextFontSize property: Watermark class	44
TextStartPosX property: Watermark class	44
TextStartPosY property: Watermark class	45
Understanding the DigitalCertStore Class	45
DigitalCertStore Class Methods	45
DigitalCertStore method: DigitalCertStore class	45
ExtractCertificateByAuthorizedRole method: DigitalCertStore class	46
ExtractCertificateByAuthorizedUser method: DigitalCertStore class	47
ExtractCertificateByDigitalID method: DigitalCertStore class	48
getDigitalCertFileNameByDigitalID method: DigitalCertStore class	49
getDigitalIdBySigner method: DigitalCertStore class	50
getEncPassword method: DigitalCertStore class	51
getListOfAuthorizedRoleNames method: DigitalCertStore class	51
getListOfAuthorizedUsers method: DigitalCertStore class	52
getListOfDigitalId method: DigitalCertStore class	53
getListOfSigner method: DigitalCertStore class	53
getSignerByDigitalId method: DigitalCertStore class	54
isDigitalCertValid method: DigitalCertStore class	54
DigitalCertStore Class Properties	55
ErrorMessageDetail property: DigitalCertStore class	55
ErrorMessageSet property: DigitalCertStore class	55
Understanding the IPDFSignature Interface Class	55
IPDFSignature Class Methods	57
getErrorString method: IPDFSignature class	57
getSignatureId method: IPDFSignature class	58
IPDFSignature Class Properties	60
KeyFieldNames property: IPDFSignature class	61
KeyFieldValues property: IPDFSignature class	61
OperatorId property: IPDFSignature class	62
ProcessInstance property: IPDFSignature class	62

ReportId property: IPDFSignature class	62
secStore property: IPDFSignature class	62
UseSameSignatureForBursting property: IPDFSignature class	63
Understanding the BIP_EMAIL_DATA Interface Class	64
BIP_EMAIL_DATA Class Methods	65
BIP_EMAIL_DATA method: BIP_EMAIL_DATA class	65
getEmailArray method: BIP_EMAIL_DATA class	66
getErrorString method: BIP_EMAIL_DATA class	68
BIP_EMAIL_DATA Class Properties	68
BurstFieldName property: BIP_EMAIL_DATA class	69
BurstFieldValue property: BIP_EMAIL_DATA class	69
ReportName property: BIP_EMAIL_DATA class	69
BI Publisher Classes Example	69
Generating and Publishing a Report	69

14 Business Interlink Class

Understanding Business Interlink Class	1
Using the Interlink Object	1
Deciding Which Methods to Use	2
Executing the Business Interlink Object	2
Supporting Batch Input and Output	2
Supporting Rowsets	2
Using the Flat Table Methods	2
Supporting Dynamic Output	3
Using Hierarchical Data (BIDocs)	3
Using the Incoming Business Interlink Methods and Properties	6
Understanding the State of an Interlink Object	7
Using Business Interlink with Application Engine	7
Using the Data Type of a Business Interlink Object	8
Understanding the Scope of a Business Interlink Object	8
Business Interlink Class Built-in Functions	8
Business Interlink Class Methods	8
AddDoc method: Business Interlink class	9
AddInputRow method: Business Interlink class	10
AddNextDoc method: Business Interlink class	11
AddValue method: Business Interlink class	13
BulkExecute method: Business Interlink class	15
Clear method: Business Interlink class	20
Execute method: Business Interlink class	20
FetchIntoRecord method: Business Interlink class	22
FetchIntoRowset method: Business Interlink class	24

FetchNextRow method: Business Interlink class	27
GetCount method: Business Interlink class	28
GetDoc method: Business Interlink class	29
GetFieldCount method: Business Interlink class	31
GetFieldType method: Business Interlink class	32
GetFieldValue method: Business Interlink class	34
GetInputDocs method: Business Interlink class	35
GetNextDoc method: Business Interlink class	36
GetOutputDocs method: Business Interlink class	38
GetPreviousDoc method: Business Interlink class	39
GetStatus method: Business Interlink class	40
GetValue method: Business Interlink class	41
InputRowset method: Business Interlink class	43
MoveFirst method: Business Interlink class	45
MoveNext method: Business Interlink class	46
MoveToDoc method: Business Interlink class	47
ResetCursor method: Business Interlink class	49
Incoming Business Interlink Methods	49
AddAttribute method: Incoming Business Interlink class	49
AddComment method: Incoming Business Interlink class	50
AddProcessInstruction method: Incoming Business Interlink class	51
AddText method: Incoming Business Interlink class	52
CreateElement method: Incoming Business Interlink class	53
GenXMLString method: Incoming Business Interlink class	54
GetAttributeName method: Incoming Business Interlink class	55
GetAttributeValue method: Incoming Business Interlink class	56
GetNode method: Incoming Business Interlink class	57
ParseXMLString method: Incoming Business Interlink class	58
Incoming Business Interlink Properties	59
AttributeCount property: Incoming Business Interlink class	59
ChildNodeCount property: Incoming Business Interlink class	60
NodeName property: Incoming Business Interlink class	61
NodeType property: Incoming Business Interlink class	61
NodeValue property: Incoming Business Interlink class	62
Business Interlink Class Property	63
StopAtError property: Business Interlink class	63
Configuration Parameters	63
Interlink Plug-in Configuration Parameters	63
URL Configuration Parameter	64
BIDocValidate Configuration Parameter	64

15 Charting Classes

Understanding the Charting Classes	1
Chart Classes	1
Gantt Class	2
Gauge Classes	3
OrgChart Class	3
RatingBoxChart Class	4
Spark Chart Class	4
Creating PeopleSoft Charts	5
Creating a Chart on a Page	5
Creating a Chart Using an iScript	8
Special Considerations for Charts	8
Component Processor Considerations	8
Translation Considerations	9
Text Considerations for the Chart Class	9
Text Considerations for the Gantt Class	12
Considerations for Using Mobile Devices	12
Fluid Mode Considerations for Charts and Gauges	12
Sizing a Chart or Gauge in Classic Mode	17
Styling PeopleSoft Charts	17
Accessibility Settings for Charts	19
Color Contrast Mode for Charts	21
Using the Chart Class	23
Understanding Chart Class Terms	23
Creating Charts Using the Chart Class	24
Chart Class Chart Types	25
Chart Class Design Guidelines	25
Creating and Using Data Series with Charts	41
Creating a Chart with Two Y-Axes	42
Selecting and Highlighting Data Points	46
Using the ReferenceArea Class	47
Using the ReferenceLine Class	49
Using the Series Class	51
Using the ToolTipLabel Class	53
Scope and Data Type of a Chart Object	55
Error Handling	55
Using the Gauge Classes	55
Understanding Gauge Terms	55
Gauge Types	56
Creating Gauges Using the Gauge Classes	56
Design Guidelines	57

Gauge Interactivity	58
Using the Threshold Class	59
Using the Rating Gauge Classes	61
Scope and Data Type of Gauge Objects	63
Error Handling	63
Properties of the Gauge Classes	63
Using the Spark Chart Classes	65
Creating Spark Charts	67
Using the Gantt Class	69
Understanding Gantt Chart Terms	70
Using Gantt Charts in the PeopleSoft Pure Internet Architecture	70
Creating Gantt Charts Using the Gantt Class	72
Specifying Time Line Axis Formats	73
Working with Start and End Dates	75
Using Gantt Glyphs	75
Scope and Data Type of a Gantt Object	76
Error Handling	76
Using the OrgChart Class	77
Understanding Organization Chart Terms	77
Using Organization Charts in the PeopleSoft Pure Internet Architecture	79
Creating Organization Charts Using the OrgChart Class	81
Overview of Creating an Organization Chart	81
Creating an Organization Chart	82
Displaying Breadcrumbs (Optional)	83
Defining Descriptors	84
Implementing Menus and Drop-Down Lists (Optional)	86
Configuring Related Action Menus	88
Configuring the Node Record for Drop-Downs	89
Configuring Drop-Downs	89
Populating the Drop-Down Rowset	90
Setting Drop-Down Styles	91
Designing Organization Chart Nodes	92
Implementing Node Views (Optional)	96
Implementing Zoom Schemas (Optional)	98
Specifying Scroll Types	102
Configuring Connector Lines and Node Borders	103
Organization Chart Actions and Events	104
Organization Chart Subrecord Definitions	105
Minimum Methods and Properties	114
Scope and Data Type of an OrgChart Object	115
Using the RatingBoxChart Class	115
Understanding Rating Box Chart Terms	116

Using Rating Box Charts in PeopleSoft Applications	117
Creating Rating Box Charts Using the RatingBoxChart Class	118
Rating Box Chart Subrecord Definition	119
Minimum Methods	119
Minimum Properties	120
Using the QuadrantSchema Class	120
Data Type of a RatingBoxChart Object	123
Scope of a RatingBoxChart Object	123
Charting Classes Reference	123
Charting Classes Built-in Functions	124
Chart Class Methods	124
Reset method: Chart class	125
SetColorArray method: Chart class	125
SetData method: Chart class	127
SetDataColor method: Chart class	128
SetDataHints method: Chart class	129
SetDataLabel method: Chart class	132
SetDataLabelPosition method: Chart class	135
SetDataLabelStyle method: Chart class	137
SetDataMarker method: Chart class	137
SetDataMarkerSize method: Chart class	138
SetDataSeries method: Chart class	139
SetDataURLs method: Chart class	140
SetDataXAxis method: Chart class	141
SetDataYAxis method: Chart class	142
SetDataZAxis method: Chart class	146
SetExplodedSectorsArray method: Chart class	148
SetFunnelDataActual method: Chart class	149
SetFunnelDataTarget method: Chart class	150
SetGlyphArray method: Chart class	151
SetLegend method: Chart class	151
SetOldData method: Chart class	152
SetOldDataSeries method: Chart class	153
SetOldDataXAxis method: Chart class	154
SetOldDataYAxis method: Chart class	154
SetReferenceArea method: Chart class	155
SetReferenceLine method: Chart class	155
SetSelectedData method: Chart class	156
SetSeries method: Chart class	157
SetSeriesLabels method: Chart class	158
SetSvgGradientColor1 method: Chart class	158
SetSvgGradientColor2 method: Chart class	160

SetSvgGradientColor3 method: Chart class	161
SetSvgGradientColor4 method: Chart class	162
SetSvgGradientOffset1 method: Chart class	163
SetSvgGradientOffset2 method: Chart class	164
SetSvgGradientOffset3 method: Chart class	165
SetSvgGradientOffset4 method: Chart class	166
SetToolTipLabels method: Chart class	167
SetXAxisLabels method: Chart class	167
SetYAxisColumnType method: Chart class	168
SetYAxisLabels method: Chart class	169
Chart Class Properties	170
AdditionalStyleSuffix property: Chart class	170
AnimationDuration property: Chart class	171
AnimationType property: Chart class	171
AspectRatio property: Chart class	171
AspectRatioPortrait property: Chart class	172
ChartURL property: Chart class	172
DataSelectionMode property: Chart class	173
DataStartRow property: Chart class	173
DataWidth property: Chart class	174
FooterAlignment property: Chart class	174
FooterStyle property: Chart class	175
FootNote property: Chart class	175
FunnelOrientation property: Chart class	175
FunnelPercentMeasure property: Chart class	176
HasLegend property: Chart class	176
HasXAxis property: Chart class	177
HasYAxis property: Chart class	177
Height property: Chart class	178
HideShowBehavior property: Chart class	179
Html property: Chart class	179
ImageMap property: Chart class	180
IsChartDrillable property: Chart class	180
IsColorContrastMode property: Chart class	181
IsDrillable property: Chart class	181
IsLineChartLineSmoothing property: Chart class	182
IsPlainImage property: Chart class	182
IsSplitDualY property: Chart class	182
IsTrueXY property: Chart class	183
IsXAxisInteger property: Chart class	183
IsYAxisInteger property: Chart class	183
IsY2AxisInteger property: Chart class	183

LegendPosition property: Chart class	184
LineChartDataGlyphSize property: Chart class	184
MainTitle property: Chart class	184
MinHeight property: Chart class	185
OLType property: Chart class	185
PieCenterLabelStyle property: Chart class	186
PieChartCenterLabel property: Chart class	186
ShowCrossHair property: Chart class	186
SubTitle property: Chart class	186
SubTitleAlignment property: Chart class	187
SubTitleStyle property: Chart class	187
TitleAlignment property: Chart class	187
TitleStyle property: Chart class	188
Type property: Chart class	188
Width property: Chart class	189
XAxisCrossPoint property: Chart class	190
XAxisLabelOrient property: Chart class	190
XAxisMax property: Chart class	190
XAxisMin property: Chart class	191
XAxisPrecision property: Chart class	191
XAxisTitle property: Chart class	191
XAxisTitleOrient property: Chart class	191
Y2AxisMax property: Chart class	191
Y2AxisMin property: Chart class	192
Y2AxisPrecision property: Chart class	192
Y2AxisTitle property: Chart class	192
Y2AxisTitleOrient property: Chart class	192
YAxisCrossPoint property: Chart class	193
YAxisLabelOrient property: Chart class	193
YAxisMax property: Chart class	193
YAxisMin property: Chart class	193
YAxisPrecision property: Chart class	194
YAxisTicks property: Chart class	194
YAxisTitle property: Chart class	194
YAxisTitleOrient property: Chart class	194
ChartClientState Class Methods	194
ChartClientState	194
ChartClientState Class Properties	195
aSelections property: ChartClientState class	195
nChartRow property: ChartClientState class	197
nType property: ChartClientState class	197
ReferenceArea Class Properties	198

Association property: ReferenceArea class	198
Description property: ReferenceArea class	199
IsDisplayedTextInLegend property: ReferenceArea class	199
LineType property: ReferenceArea class	199
ReferenceAreaColor property: ReferenceArea class	200
ReferenceAreaLocation property: ReferenceArea class	201
ReferenceAreaValues property: ReferenceArea class	201
ReferenceAreaValueSet property: ReferenceArea class	201
ShortText property: ReferenceArea class	201
ReferenceLine Class Properties	202
Association property: ReferenceLine class	202
Description property: ReferenceLine class	202
IsDisplayedTextInLegend property: ReferenceLine class	203
LineType property: ReferenceLine class	203
ReferenceLineColor property: ReferenceLine class	203
ReferenceLineLocation property: ReferenceLine class	204
ReferenceLineValue property: ReferenceLine class	204
ReferenceLineValueSet property: ReferenceLine class	205
ShortText property: ReferenceLine class	205
Series Class Properties	205
Name property: Series class	205
Type property: Series class	206
ToolTipLabel Class Properties	206
ToolTipLabelType property: ToolTipLabel class	206
ToolTipLabelValue property: ToolTipLabel class	207
DialGauge Class Methods	207
Refresh method: DialGauge class	207
SetThreshold method: DialGauge class	208
DialGauge Class Properties	208
AdditionalStyleSuffix property: DialGauge class	208
AnimationDuration property: DialGauge class	208
AnimationType property: DialGauge class	209
BottomLabel property: DialGauge class	209
BottomLabelPosition property: DialGauge class	209
GaugeDecimalDigit property: DialGauge class	209
GaugeMaximum property: DialGauge class	210
GaugeMinimum property: DialGauge class	210
GaugeURL property: DialGauge class	210
Height property: DialGauge class	210
IsDrillable property: DialGauge class	211
LegendPosition property: DialGauge class	211
MajorTickIncrement property: DialGauge class	211

MetricLabelPosition property: DialGauge class	211
MetricLabelType property: DialGauge class	212
MinorTickIncrement property: DialGauge class	212
TickLabelPosition property: DialGauge class	212
TopLabel property: DialGauge class	212
TopLabelPosition property: DialGauge class	213
Type property: DialGauge class	213
Width property: DialGauge class	213
LEDGauge Class Methods	213
Refresh method: LEDGauge class	213
SetThreshold method: LEDGauge class	214
LEDGauge Class Properties	214
AdditionalStyleSuffix property: LEDGauge class	214
AnimationDuration property: LEDGauge class	214
AnimationType property: LEDGauge class	214
AspectRatio property: LEDGauge class	214
BottomLabel property: LEDGauge class	215
BottomLabelPosition property: LEDGauge class	215
GaugeDecimalDigit property: LEDGauge class	216
GaugeURL property: LEDGauge class	216
Height property: LEDGauge class	216
Html property: Chart class	217
IsDrillable property: LEDGauge class	218
LegendPosition property: LEDGauge class	218
MetricLabelPosition property: LEDGauge class	218
MetricLabelType property: LEDGauge class	219
TopLabel property: LEDGauge class	219
TopLabelPosition property: LEDGauge class	219
Type property: LEDGauge class	219
Width property: LEDGauge class	220
RatingGaugeChart Class Methods	221
SetRatingGaugeThresholds method: RatingGaugeChart class	221
RatingGaugeChart Class Properties	221
AspectRatio property: RatingGaugeChart class	222
ChangedState property: RatingGaugeChart class	222
HoverState property: RatingGaugeChart class	223
Html property: Chart class	223
Max property: RatingGaugeChart class	224
Min property: RatingGaugeChart class	224
ReadOnly property: RatingGaugeChart class	224
SelectedState property: RatingGaugeChart class	224
Step property: RatingGaugeChart class	225

Title property: RatingGaugeChart class	225
UnselectedState property: RatingGaugeChart class	225
Width property: RatingGaugeChart class	226
RatingGaugeState Class Properties	226
BorderColor property: RatingGaugeState class	226
Color property: RatingGaugeState class	227
Shape property: RatingGaugeState class	228
GaugeThreshold Class Properties	228
BorderColor property: GaugeThreshold class	228
Color property: GaugeThreshold class	229
Description property: GaugeThreshold class	230
MaxValue property: GaugeThreshold class	230
StatusMeterGauge Class Methods	230
Refresh method: StatusMeterGauge class	230
SetThreshold method: StatusMeterGauge class	231
StatusMeterGauge Class Properties	231
AdditionalStyleSuffix property: StatusMeterGauge class	231
AnimationDuration property: StatusMeterGauge class	231
AnimationType property: StatusMeterGauge class	231
AspectRatio property: StatusMeterGauge class	231
BottomLabel property: StatusMeterGauge class	232
BottomLabelPosition property: StatusMeterGauge class	232
GaugeDecimalDigit property: StatusMeterGauge class	233
GaugeMaximum property: StatusMeterGauge class	233
GaugeMinimum property: StatusMeterGauge class	233
GaugeURL property: StatusMeterGauge class	233
Height property: StatusMeterGauge class	234
Html property: Chart class	234
IsDrillable property: StatusMeterGauge class	235
LegendPosition property: StatusMeterGauge class	235
MajorTickIncrement property: StatusMeterGauge class	236
MetricLabelPosition property: StatusMeterGauge class	236
MetricLabelType property: StatusMeterGauge class	236
MinorTickIncrement property: StatusMeterGauge class	236
TopLabel property: StatusMeterGauge class	237
TopLabelPosition property: StatusMeterGauge class	237
Type property: StatusMeterGauge class	237
Width property: StatusMeterGauge class	240
Threshold Class Properties	240
Colors property: Threshold class	241
Descriptions property: Threshold class	242
Id property: Threshold class	242

Values property: Threshold class	242
SparkChart Class Methods	243
SetSparkChartItems method: SparkChart class	243
SparkChart Class Properties	244
AnimationDuration property: SparkChart class	244
AnimationType property: SparkChart class	244
AspectRatio property: SparkChart class	244
barGapRatio property: SparkChart class	245
Color property: SparkChart class	246
Html property: Chart class	246
IsDrillable property: SparkChart class	247
LineStyle property: SparkChart class	248
LineType property: SparkChart class	248
LineWidth property: SparkChart class	249
SparkChartURL property: SparkChart class	250
Title property: SparkChart class	250
Type property: SparkChart class	250
Width property: SparkChart class	251
SparkChartItem Class Properties	251
BorderColor property: SparkChartItem class	251
Color property: SparkChartItem class	252
FloatValue property: SparkChartItem class	253
MarkerDisplayed property: SparkChartItem class	253
MarkerShape property: SparkChartItem class	254
Value property: SparkChartItem class	254
Gantt Class Methods	255
Refresh method: Gantt class	255
Reset method: Gantt class	256
SetActualEndDate method: Gantt class	256
SetActualStartDate method: Gantt class	257
SetActualTaskBarColor method: Gantt class	258
SetChartArea method: Gantt class	258
SetDayFormat method: Gantt class	259
SetHourFormat method: Gantt class	260
SetMinuteFormat method: Gantt class	260
SetMonthFormat method: Gantt class	260
SetPlannedEndDate method: Gantt class	261
SetPlannedStartDate method: Gantt class	262
SetPlannedTaskBarColor method: Gantt class	262
SetSecondFormat method: Gantt class	263
SetTableXScrollbar method: Gantt class	263
SetTaskAppData method: Gantt class	264

SetTaskAppDataTitles method: Gantt class	264
SetTaskBarURL method: Gantt class	265
SetTaskData method: Gantt class	266
SetTaskDependencyChildID method: Gantt class	266
SetTaskDependencyData method: Gantt class	267
SetTaskDependencyParentID method: Gantt class	268
SetTaskDependencyType method: Gantt class	268
SetTaskDependencyURL method: Gantt class	269
SetTaskDrill method: Gantt class	270
SetTaskExpanded method: Gantt class	271
SetTaskID method: Gantt class	271
SetTaskLabel method: Gantt class	271
SetTaskLevel method: Gantt class	272
SetTaskMilestone method: Gantt class	273
SetTaskName method: Gantt class	274
SetTaskProgress method: Gantt class	274
SetTaskProgressBarColor method: Gantt class	275
SetWBSNumbering method: Gantt class	276
SetYearFormat method: Gantt class	276
Gantt Class Properties	277
AdditionalStyleSuffix property: Gantt class	277
AxisEndDateTime property: Gantt class	277
AxisStartDateTime property: Gantt class	277
DataStartRow property: Gantt class	278
DataWidth property: Gantt class	278
GridLines property: Gantt class	278
GridLineType property: Gantt class	278
Height property: Gantt class	279
ImageMap property: Gantt class	279
InteractiveEnd property: Gantt class	279
InteractiveMove property: Gantt class	280
InteractiveProgress property: Gantt class	280
InteractiveStart property: Gantt class	280
IsDrillable property: Gantt class	281
IsPlainImage property: Gantt class	281
PixelsPerRow property: Gantt class	281
RevertToPre850 property: Gantt class	281
ShowTaskLabels property: Gantt class	282
Style property: Gantt class	282
StyleSheet property: Gantt class	282
TaskDependencyLineType property: Gantt class	282
TaskMilestoneGlyph property: Gantt class	283

TaskTitle property: Gantt class	283
Width property: Gantt class	283
OrgChart Class Methods	284
SetCrumbData method: OrgChart class	284
SetCrumbRecord method: OrgChart class	284
SetDropDownData method: OrgChart class	285
SetDropDownRecord method: OrgChart class	285
SetIMData method: OrgChart class	286
SetIMRecord method: OrgChart class	286
SetLegend method: OrgChart class	286
SetLegendImg method: OrgChart class	287
SetNodeData method: OrgChart class	287
SetNodeDisplayDataRecord method: OrgChart class	288
SetNodeDisplayData method: OrgChart class	288
SetNodeRecord method: OrgChart class	289
SetNodeViewEntries method: OrgChart class	289
SetNodeViewText method: OrgChart class	290
SetPopUpNodeData method: OrgChart class	291
SetPopUpNodeRecord method: OrgChart class	291
SetSchemaLevels method: OrgChart class	292
OrgChart Class Properties	293
CenterFocusNode property: OrgChart class	293
ChartCurrentSchemaLevel property: OrgChart class	293
ChartScrollType property: OrgChart class	294
Collapsed_Msg property: OrgChart class	294
CollapsedImage property: OrgChart class	295
CollapseMainIconSpace property: OrgChart class	295
CrumbDescrStyle property: OrgChart class	295
CrumbMaxDisplayLength property: OrgChart class	296
CrumbSeparatorImage property: OrgChart class	296
DefaultImage property: OrgChart class	296
Direction property: OrgChart class	296
DropDownBoxStyle property: OrgChart class	297
Expanded_Msg property: OrgChart class	297
ExpandedImage property: OrgChart class	297
FocusNodeStyle property: OrgChart class	297
HasLegend property: OrgChart class	298
Height property: OrgChart class	298
ImageHeight property: OrgChart class	298
ImageLocation property: OrgChart class	298
ImageMouseoverMagnificationFactor property: OrgChart class	299
IMPresence property: OrgChart class	299

IMRefreshInterval property: OrgChart class	299
InitialView property: OrgChart class	300
LegendPosition property: OrgChart class	300
LegendStyle property: OrgChart class	300
LegendTopSpace property: OrgChart class	301
MainTitle property: OrgChart class	301
MainTitleStyle property: OrgChart class	301
MaxDropdownDisplayItem property: OrgChart class	301
MaxPopupDisplayNode property: OrgChart class	302
NodeDescr1Style property: OrgChart class	302
NodeDescr2Style property: OrgChart class	302
NodeDescr3Style property: OrgChart class	303
NodeDescr4Style property: OrgChart class	303
NodeDescr5Style property: OrgChart class	303
NodeDescr6Style property: OrgChart class	304
NodeDescr7Style property: OrgChart class	304
NodeMaxDisplayDescLength property: OrgChart class	304
NodeProportion property: OrgChart class	305
OptimizeHorizontalSpace property: OrgChart class	305
OptimizeVerticalSpace property: OrgChart class	306
PopupHeaderStyle property: OrgChart class	306
PopupNodeDescr1Style property: OrgChart class	306
PopupNodeDescr2Style property: OrgChart class	307
PopupNodeDescr3Style property: OrgChart class	307
PopupNodeDescr4Style property: OrgChart class	307
PopupNodeDescr5Style property: OrgChart class	307
PopupNodeDescr6Style property: OrgChart class	308
PopupNodeDescr7Style property: OrgChart class	308
PopupNodeDescr8Style property: OrgChart class	308
Style property: OrgChart class	309
SuppressPeopleCodeOnNode property: OrgChart class	309
SuppressPeopleCodeOnImage property: OrgChart class	309
UnlinkCrumbDescrStyle property: OrgChart class	309
VerticalSpace property: OrgChart class	310
Width property: OrgChart class	310
SchemaLevel Class Properties	310
ID property: SchemaLevel class	310
ImageHeight property: SchemaLevel class	310
RatingBoxChart Class Methods	311
SetLegend method: RatingBoxChart class	311
SetLegendImg method: RatingBoxChart class	312
SetQuadrantSchemas method: RatingBoxChart class	312

SetRBNodeData method: RatingBoxChart class	313
SetRBNodeRecord method: RatingBoxChart class	313
SetXAxisLabels method: RatingBoxChart class	314
SetYAxisLabels method: RatingBoxChart class	314
RatingBoxChart Class Properties	315
BoxMaxDisplayItems property: RatingBoxChart class	315
DraggedNodeStyle property: RatingBoxChart class	315
EnableRelatedActions property: RatingBoxChart class	316
GridLineType property: RatingBoxChart class	316
HasLegend property: RatingBoxChart class	317
Height property: RatingBoxChart class	317
IconOnlySelectedQuadrantStyle property: RatingBoxChart class	317
IsDragable property: RatingBoxChart class	318
LegendPosition property: RatingBoxChart class	318
MainTitle property: RatingBoxChart class	318
MainTitleStyle property: RatingBoxChart class	318
NDMaxDisplayDescLength property: RatingBoxChart class	319
PopUpHeaderStyle property: RatingBoxChart class	319
PopUpHeight property: RatingBoxChart class	319
PopUpStyle property: RatingBoxChart class	320
PopUpWidth property: RatingBoxChart class	320
SelectedQuadrantStyle property: RatingBoxChart class	320
ShowAxisLabels property: RatingBoxChart class	321
ShowNodeDescription property: RatingBoxChart class	321
Style property: RatingBoxChart class	321
ViewAllStyle property: RatingBoxChart class	322
Width property: RatingBoxChart class	322
XAxisBoxNum property: RatingBoxChart class	322
XAxisLabelStyle property: RatingBoxChart class	323
XAxisTitle property: RatingBoxChart class	323
XAxisTitleStyle property: RatingBoxChart class	323
YAxisBoxNum property: RatingBoxChart class	324
YAxisLabelStyle property: RatingBoxChart class	324
YAxisTitle property: RatingBoxChart class	324
YAxisTitleStyle property: RatingBoxChart class	324
QuadrantSchema Class Properties	325
LabelPosition property: QuadrantSchema class	325
LabelStyle property: QuadrantSchema class	325
LabelText property: QuadrantSchema class	326
XRating property: QuadrantSchema class	326
YRating property: QuadrantSchema class	326
Timeline Class Methods	326

SetData method: Timeline class	326
SetDataSeries method: Timeline class	327
SetDataItemStart method: Timeline class	327
SetDataItemDescription method: Timeline class	328
SetDataItemTitle method: Timeline class	329
SetSeriesEmptyText method: Timeline class	329
SetSeriesLabels method: Timeline class	330
Timeline Class Properties	330
AspectRatio property: Timeline class	330
End property: Timeline class	331
Height property: Timeline class	331
MajorAxisScale property: Timeline class	331
MinorAxisScale property: Timeline class	332
MinorAxisZoomOrder property: Timeline class	332
Orientation property: Timeline class	333
Start property: Timeline class	333
TimelineEmptyText property: Timeline class	333
TimelineLabel property: Timeline class	334
Width property: Timeline class	334
Charting Examples	334
Creating a Chart Using the Chart Class	334
Creating a Gantt Chart	354
Creating an Organization Chart	357
Creating a Rating Box Chart	361
Creating a Chart Using an iScript	364
Creating a Timeline Chart	366
Desupported Chart Class Methods	367
Refresh method: Chart class	367
SetDataAnnotations method: Chart class	368
SetDataGlyphScale method: Chart class	369
SetOldDataAnnotations method: Chart class	370
SetOldDataGlyphScale method: Chart class	370
Desupported Chart Class Properties	370
GridLines property: Chart class	370
GridLineType property: Chart class	370
HighlightSelectedDataPoint property: Chart class	370
LegendStyle property: Chart class	371
LineType property: Chart class	371
MainTitleOrient property: Chart class	371
MainTitleStyle property: Chart class	371
OLLineType property: Chart class	372
RevertToPre850 property: Chart class	372

RotationAngle property: Chart class	372
SetChartURL property: Chart class	372
Style property: Chart class	372
StyleSheet property: Chart class	372
XAxisCross property: Chart class	373
XAxisScaleResolution property: Chart class	373
XAxisStyle property: Chart class	373
XAxisTitleStyle property: Chart class	373
XRotationAngle property: Chart class	373
YAxisScaleResolution property: Chart class	373
YAxisStyle property: Chart class	373
YAxisTitleStyle property: Chart class	373
YRotationAngle property: Chart class	374
ZRotationAngle property: Chart class	374

16 Component Interface Classes

Understanding Component Interface Class	1
Life Cycle of a Component Interface	2
Setting Component Interface Keys	3
Standard and User-Defined Component Interface Methods	4
Accessing Component Interface Standard Properties	5
Accessing User-Defined Component Interface Properties	6
Data Type of a Component Interface Object	6
Scope of a Component Interface Object	7
Implementing a Component Interface	7
Component Interface Methods and Timeouts	8
Traversing a Component Interface and Using Data Collections	8
Working With Effective-Dated Data	10
How a Developer Uses GetEffectiveltem	11
Reusing Existing Code	11
Differences in Search Dialog Processing	11
Differences in PeopleCode Event and Function Behavior	12
Using %Menu Conditions	12
Session Class Methods	13
FindComplntfcs method: Session class	13
GetComplntfc method: Session class	13
ValidateComplntfc method: Session class	14
Component Interface Collection Methods	15
First method: Component Interface collection	15
Item method: Component Interface collection	15
Next method: Component Interface collection	16

Component Interface Collection Property	16
Count property: Component Interface collection	16
Component Interface Class Methods	16
Cancel method: Component Interface class	17
CopyRowset method: Component Interface class	17
CopyRowsetDelta method: Component Interface class	19
CopySetupRowset method: Component Interface class	22
CopySetupRowsetDelta method: Component Interface class	24
Create method: Component Interface class	27
Find method: Component Interface class	27
Get method: Component Interface class	28
GetPropertyByName method: Component Interface class	29
Save method: Component Interface class	30
SetPropertyByName method: Component Interface class	31
Component Interface Class Properties	32
ComponentName property: Component Interface class	32
CreateKeyInfoCollection property: Component Interface class	32
EditHistoryItems property: Component Interface class	33
FindKeyInfoCollection property: Component Interface class	33
GetDummyRows property: Component Interface class	34
GetHistoryItems property: Component Interface class	34
GetKeyInfoCollection property: Component Interface class	35
InteractiveMode property: Component Interface class	35
PropertyInfoCollection property: Component Interface class	35
StopOnFirstError property: Component Interface class	35
Data Collection Methods	36
CurrentItem method: Data collection	36
DeleteItem method: Data collection	36
GetEffectiveItem method: Data collection	38
GetEffectiveItemNum method: Data collection	39
InsertItem method: Data collection	40
Item method: Data collection	40
ItemByKeys method: Data collection	41
Data Collection Properties	42
Count property: Data collection	42
CurrentItemNumber property: Data collection	42
Data Item Class Property	42
ItemNum property: Data Item class	43
Accessing the Structure of a Component Interface	43
CompIntfPropInfoCollection Collection	43
CompIntfPropInfoCollection Collection Methods	46
First method: CompIntfPropInfoCollection collection	46

Item method: ComplntfPropInfoCollection collection	46
Next method: ComplntfPropInfoCollection collection	47
ComplntfPropInfoCollection Collection Properties	47
Count property: ComplntfPropInfoCollection collection	47
ComplntfPropInfoCollection Object Properties	47
Format property: ComplntfPropInfoCollection Object class	47
IsCollection property: ComplntfPropInfoCollection Object class	48
IsReadOnly property: ComplntfPropInfoCollection Object class	48
Key property: ComplntfPropInfoCollection Object class	48
LabelLong property: ComplntfPropInfoCollection Object class	48
LabelShort property: ComplntfPropInfoCollection Object class	49
Length property: ComplntfPropInfoCollection Object class	49
Name property: ComplntfPropInfoCollection Object class	49
Prompt property: ComplntfPropInfoCollection Object class	49
PropertyInfoCollection property: ComplntfPropInfoCollection Object class	50
Required property: ComplntfPropInfoCollection Object class	50
Type property: ComplntfPropInfoCollection Object class	50
Xlat property: ComplntfPropInfoCollection Object class	51
YesNo property: ComplntfPropInfoCollection Object class	51
Component Interface Examples	51
Create a New Instance of Data Example	51
Getting an Existing Instance of Data Example	54
Retrieving a List of Instance of Data Example	57
Inserting Effective-Dated Data Example	59
Inserting Effective-Dated Data Example Using Visual Basic	61
Inserting or Deleting a Row of Data Example	62

17 Connected Query Classes

Understanding the Connected Query Classes	1
Importing Connected Query Classes	1
CONQRSMGR Class	2
CONQRSMGR Class Constructor	2
CONQRSMGR method: CONQRSMGR class	2
CONQRSMGR Class Methods	2
CleanOutputFile method: CONQRSMGR class	2
Close method: CONQRSMGR class	3
CopyDefn method: CONQRSMGR class	3
DeleteDefn method: CONQRSMGR class	4
ExistsByName method: CONQRSMGR class	4
GetSampleXMLString method: CONQRSMGR class	5
Open method: CONQRSMGR class	5

ResetQueriesPrompt method: CONQRSMGR class	5
Run method: CONQRSMGR class	6
RunToWindow method: CONQRSMGR class	8
RunToXMLFormattedString method: CONQRSMGR class	8
Save method: CONQRSMGR class	9
SaveRunControlParms method: CONQRSMGR class	9
SetRunControlData method: CONQRSMGR class	10
Validate method: CONQRSMGR class	10
ValidateIfFieldsMapped method: CONQRSMGR class	11
ValidateRunControlParms method: CONQRSMGR class	11
CONQRSMGR Class Properties	12
Const property: CONQRSMGR class	12
Description property: CONQRSMGR class	12
Details property: CONQRSMGR class	12
ErrString property: CONQRSMGR class	12
ExecutionLog property: CONQRSMGR class	13
IgnoreRelFldOutput property: CONQRSMGR class	13
IsChanged property: CONQRSMGR class	13
IsDebugMode property: CONQRSMGR class	14
IsInit property: CONQRSMGR class	14
IsPublic property: CONQRSMGR class	14
LastUpdatedBy property: CONQRSMGR class	14
LastUpdatedDTTM property: CONQRSMGR class	15
MaxRowsPerQuery property: CONQRSMGR class	15
Name property: CONQRSMGR class	15
ObjectRowset property: CONQRSMGR class	15
OpriD property: CONQRSMGR class	16
OutProcessFileName property: CONQRSMGR class	16
PropertyArray property: CONQRSMGR class	16
QueriesPromptsArray property: CONQRSMGR class	18
QueryArray property: CONQRSMGR class	18
RegisteredBy property: CONQRSMGR class	18
RegisteredDTTM property: CONQRSMGR class	19
RunCntlId property: CONQRSMGR class	19
RunControlParArray property: CONQRSMGR class	19
RunMode property: CONQRSMGR class	19
SchedInfo property: CONQRSMGR class	21
SchedRequestType property: CONQRSMGR class	22
SecProfile property: CONQRSMGR class	22
ShowFormattedXML property: CONQRSMGR class	22
Status property: CONQRSMGR class	23
XMLDataFileName property: CONQRSMGR class	23

XMLDataFullName property: CONQRSMGR class	23
CONQRSPROPERTY Class	23
CONQRSPROPERTY Class Properties	23
PROPDEFAULT property: CONQRSPROPERTY class	24
PROPNAME property: CONQRSPROPERTY class	24
PROPVALUE property: CONQRSPROPERTY class	24
PROPVALUEARRAY property: CONQRSPROPERTY class	24
PROPVALUEARRAYDESC property: CONQRSPROPERTY class	24
CONQRS_CONST Class	24
CONQRS_CONST Class Properties	25
InitExisting property: CONQRS_CONST class	25
InitNew property: CONQRS_CONST class	25
MsgSet property: CONQRS_CONST class	25
RunCntlId_Auto property: CONQRS_CONST class	25
RunMode_Prev property: CONQRS_CONST class	26
RunMode_Prev_DefRowNumber property: CONQRS_CONST class	26
RunMode_Sample property: CONQRS_CONST class	27
RunMode_Sched_File property: CONQRS_CONST class	27
RunMode_Sched_Web property: CONQRS_CONST class	27
RunMode_Window property: CONQRS_CONST class	27
RunMode_XMLFormattedString property: CONQRS_CONST class	28
SchedRequest_CQR property: CONQRS_CONST class	28
SchedRequest_XMLP property: CONQRS_CONST class	28
Stat_Active property: CONQRS_CONST class	29
Stat_InActive property: CONQRS_CONST class	29
Stat_InProgress property: CONQRS_CONST class	29
QUERYITEMPROMPT Class	29
QUERYITEMPROMPT Class Properties	29
QueryName property: QUERYITEMPROMPT class	30
QueryPromptRecord property: QUERYITEMPROMPT class	30
SCHED_INFO Class	30
SCHED_INFO Class Properties	30
AE_ID property: SCHED_INFO class	30
DIRLOCATION property: SCHED_INFO class	31
OPRID property: SCHED_INFO class	31
OUTDESTTYPE property: SCHED_INFO class	31
PRCSFILENAME property: SCHED_INFO class	31
PROCESS_INSTANCE property: SCHED_INFO class	31
RUN_CNTL_ID property: SCHED_INFO class	32
SEC_PROFILE Class	32
SEC_PROFILE Class Constructor	32
SEC_PROFILE method: SEC_PROFILE class	32

SEC_PROFILE Class Properties	32
CanCreatePublic property: SEC_PROFILE class	33
CanModify property: SEC_PROFILE class	33
CanRunQuery property: SEC_PROFILE class	33
UTILITY Class	33
UTILITY Class Constructor	33
UTILITY method: UTILITY class	33
UTILITY Class Methods	34
CheckQryForTreePrompt method: UTILITY class	34
CheckQrySecurity method: UTILITY class	34
GetQueryScopeByName method: UTILITY class	35
ValidateObjectID method: UTILITY class	35
Connected Query Classes Examples	36
Running a Connected Query in Scheduled Mode	36
Running a Connected Query in Preview Mode or Background Mode	37
Iterating Through a Connected Query Opened for Editing	39

18 ContentAuthorizerBase Class

Understanding the ContentAuthorizerBase Class	1
ContentAuthorizerBase Class Methods	1
Authorize method: ContentAuthorizerBase class	1
SetResponse method: ContentAuthorizerBase class	2
ContentAuthorizerBase Class Properties	3
ALLOW_DIRECTORY property: ContentAuthorizerBase class	3
ALLOW_SUBDIR property: ContentAuthorizerBase class	4
DENY property: ContentAuthorizerBase class	4

19 Crypt Class

Understanding the Crypt Class	1
Creating a Crypt Object	1
Declaring Crypt Objects	1
Scope of a Crypt Object	1
Crypt Class Methods	1
FirstStep method: Crypt class	2
GoToStep method: Crypt class	2
LoadLibrary method: Crypt class	3
NextStep method: Crypt class	3
Open method: Crypt class	4
SetParameter method: Crypt class	4
UpdateData method: Crypt class	5

Crypt Class Properties	5
AuthTag property: Crypt class	6
Result property: Crypt class	6
Verified property: Crypt class	6
Crypt Class Example	6

20 Document Classes

Understanding the Document Classes	1
Data Type and Scope of the Document Classes	1
Document Classes Built-in Functions	1
Document Class	1
Document Class Methods	2
GenJsonString method: Document class	2
GenXmlString method: Document class	2
GetDocumentKey method: Document class	3
GetElement method: Document class	4
GetRowset method: Document class	5
GetSchema method: Document class	5
ParseJsonString method: Document class	6
ParseXmlFromFile method: Document class	6
ParseXmlFromURL method: Document class	7
ParseXmlString method: Document class	8
UpdateFromRowset method: Document class	8
ValidateData method: Document class	9
Document Class Properties	9
DocumentElement property: Document class	9
DocumentKey Class	10
DocumentKey Class Methods	10
SetDocumentKey method: DocumentKey class	10
DocumentKey Class Properties	11
DocumentName property: DocumentKey class	11
GetDocumentName property: DocumentKey class	11
GetVersion property: DocumentKey class	11
PackageName property: DocumentKey class	12
Version property: DocumentKey class	12
Primitive Class	12
Primitive Class Methods	12
GetEnumName method: Primitive class	12
GetParent method: Primitive class	13
GetPath method: Primitive class	13
Primitive Class Properties	13

ElementType property: Primitive class	14
EnumCount property: Primitive class	14
IsChanged property: Primitive class	14
IsInitialized property: Primitive class	14
IsRequired property: Primitive class	14
MaxDefinedDecimalLength property: Primitive class	15
MaxDefinedLength property: Primitive class	15
Name property: Primitive class	15
OrigValue property: Primitive class	15
PrimitiveSubType property: Primitive class	16
PrimitiveType property: Primitive class	16
SequenceNumber property: Primitive class	17
Value property: Primitive class	17
Compound Class	17
Compound Class Methods	18
Clear method: Compound class	18
GetParent method: Compound class	18
GetPath method: Compound class	19
GetPropertyByIndex method: Compound class	19
GetPropertyByName method: Compound class	20
GetUniqueKey method: Compound class	21
Compound Class Properties	21
ElementType property: Compound class	21
IsChanged property: Compound class	21
IsInitialized property: Compound class	21
IsRequired property: Compound class	22
Name property: Compound class	22
PropertyCount property: Compound class	22
SequenceNumber property: Compound class	22
Collection Class	22
Collection Class Methods	22
AppendItem method: Collection class	23
CreateItem method: Collection class	24
DeleteItem method: Collection class	24
GetItem method: Collection class	25
GetParent method: Collection class	25
GetPath method: Collection class	26
InsertItem method: Collection class	26
Collection Class Properties	27
CollectionElementType property: Collection class	27
Count property: Collection class	27
DefinedMaxOccurs property: Collection class	27

DefinedMinOccurs property: Collection class	28
ElementType property: Collection class	28
IsChanged property: Collection class	28
IsInitialized property: Collection class	28
IsRequired property: Collection class	28
Name property: Collection class	28
SequenceNumber property: Collection class	29

21 Drop Zone Configuration Classes

Understanding the Drop Zone Configuration Classes	1
DZComponentConfig Class	1
DZContent Class	1
DZConfig Class	2
DZPage Class	2
DZComponentConfig Methods	2
AddConfig method: DZComponentConfig class	2
DZComponentConfig method: DZComponentConfig class	3
GetConfigurationsForComponent method: DZComponentConfig class	4
GetConfigurationsForPage method: DZComponentConfig class	5
GetConfigurationsForPagefield method: DZComponentConfig class	6
GetConfigurationsForSubpage method: DZComponentConfig class	7
RemoveAllConfigForComponent method: DZComponentConfig class	8
DZComponentConfig Properties	8
arrDZInfo property: DZComponentConfig class	8
DZConfig Methods	9
GetSubpageName method: DZConfig class	9
RemoveDZConfiguration method: DZConfig class	10
Save method: DZConfig class	10
SetSubpageName method: DZConfig class	11
DZConfig Properties	11
IsERCCconfigured property: DZConfig class	12
PageFldDescr property: DZConfig class	12
PageFldId property: DZConfig class	13
PageFldName property: DZConfig class	13
PageName property: DZConfig class	14
TabOrder property: DZConfig class	14
DZContent Methods	15
DZContent method: DZContent class	15
GetConfiguration method: DZContent class	15
DZPage Methods	16
DZPage method: DZPage class	16

GetConfigurationFromPageField method: DZPage class	17
GetConfigurationFromPageName method: DZPage class	17

22 DynamicLoader Class

Understanding the DynamicLoader Class	1
DynamicLoader Class Methods	1
AddTileToSection method: DynamicLoader class	1
AdjustAccessibilityByStyle method: DynamicLoader class	2
CreateTile method: DynamicLoader class	2
CreateTileUsingTab method: DynamicLoader class	3
GenerateLocalURL method: DynamicLoader class	3
GenerateTileName method: DynamicLoader class	4
GetConfigData method: DynamicLoader class	4
GetConfigDataByName method: DynamicLoader class	4
GetNextRowNumber method: DynamicLoader class	5
InitConfigData method: DynamicLoader class	5
LoadSection method: DynamicLoader class	6
SetBehaviorDefault method: DynamicLoader class	7
SetBehaviorFixed method: DynamicLoader class	7
SetBehaviorRequired method: DynamicLoader class	8
SetDefaultTileImage method: DynamicLoader class	8
SetTitleNamePrefix method: DynamicLoader class	9
SetupClassicTarget method: DynamicLoader class	9
SetupExternalTarget method: DynamicLoader class	10
SetupFluidTarget method: DynamicLoader class	10
SetupGenericTarget method: DynamicLoader class	11

23 Exception Class

Understanding Exception Class	1
How Exceptions Are Thrown	1
When to Use Exceptions	1
Try-Catch Blocks	3
Data Type for Exception Class Objects	4
Scope of Exception Class Objects	4
Exception Class Built-in Functions	4
Exception Class Methods	4
GetSubstitution method: Exception class	4
Output method: Exception class	5
SetSubstitution method: Exception class	6
ToString method: Exception class	6

Exception Class Properties	7
Context property: Exception class	7
DefaultText property: Exception class	7
MessageNumber property: Exception class	8
MessageSetNumber property: Exception class	8
MessageSeverity property: Exception class	8
StackTrace property: Exception class	8
SubstitutionCount property: Exception class	9

24 Feed Classes

Understanding the Feed Classes	1
Importing Feed Classes	2
Feed Class	2
Feed Class Constructor	3
Feed method: Feed class	3
Feed Class Methods	3
delete method: Feed class	3
equals method: Feed class	4
execute method: Feed class	5
getAttribute method: Feed class	6
load method: Feed class	7
loadFromTemplate method: Feed class	7
PopulateDSParamsWithDefaults method: Feed class	8
populatePrefData method: Feed class	9
publishToSites method: Feed class	9
resetFeedAttributes method: Feed class	10
resetFeedSecurities method: Feed class	11
save method: Feed class	11
saveAs method: Feed class	12
saveAsTemplate method: Feed class	13
setAttribute method: Feed class	14
setDataSourceById method: Feed class	14
unpublishFromSites method: Feed class	15
Feed Class Properties	16
Authorized property: Feed class	16
CategoryID property: Feed class	16
CreateDTTM property: Feed class	17
CreateNode property: Feed class	17
CreateOprID property: Feed class	17
CreatePortal property: Feed class	17
DataSource property: Feed class	17

DataTypeID property: Feed class	17
Description property: Feed class	18
FeedAttributes property: Feed class	18
FeedAuthorizationOprID property: Feed class	18
FeedAuthorizationOprPWD property: Feed class	18
FeedAuthorizationType property: Feed class	18
FeedCacheTime property: Feed class	19
FeedCacheType property: Feed class	19
FeedContentUrl property: Feed class	19
FeedFactory property: Feed class	19
FeedFormat property: Feed class	19
FeedSecurities property: Feed class	19
FeedSecurityType property: Feed class	20
FeedTemplate property: Feed class	20
FeedUrl property: Feed class	20
HasAdminParams property: Feed class	20
HasUserParams property: Feed class	21
IBOperationName property: Feed class	21
ID property: Feed class	21
LastPubDTTM property: Feed class	21
LastUpdDTTM property: Feed class	21
LastUpdOprID property: Feed class	21
NameSpaceID property: Feed class	22
ObjectType property: Feed class	22
OperatingMode property: Feed class	22
OwnerID property: Feed class	23
PublishedInSites property: Feed class	23
Title property: Feed class	23
Utility property: Feed class	23
FeedFactory Class	24
FeedFactory Class Constructor	24
FeedFactory method: FeedFactory class	24
FeedFactory Class Methods	24
convertFeedLinksToHoverMenu method: FeedFactory class	24
convertFeedLinksToOPML method: FeedFactory class	25
createFeed method: FeedFactory class	26
deleteFeed method: FeedFactory class	27
genFeedUrl method: FeedFactory class	27
genUniqueFeedId method: FeedFactory class	28
getAllPagedFeedLinks method: FeedFactory class	29
getCategory method: FeedFactory class	30
getDataSource method: FeedFactory class	30

getFeed method: FeedFactory class	31
getFeedDoc method: FeedFactory class	33
getFeedLink method: FeedFactory class	33
getFeedLinks method: FeedFactory class	34
getFeedTemplates method: FeedFactory class	35
getRelatedFeedsHoverMenu method: FeedFactory class	35
getRelativePageLinkForFeed method: FeedFactory class	36
FeedFactory Class Properties	38
DataSources property: FeedFactory class	38
Feeds property: FeedFactory class	38
Utility property: FeedFactory class	38
DataSource Class	39
DataSource Class Constructor	39
DataSource method: DataSource class	39
DataSource Class Methods	39
addParameter method: DataSource class	40
equals method: DataSource class	41
getAttributeById method: DataSource class	41
getContentUrl method: DataSource class	42
getDataSecurity method: DataSource class	43
getParameterById method: DataSource class	43
getParameterDetail method: DataSource class	44
getSettingById method: DataSource class	44
getSettingDetail method: DataSource class	45
isCurrentUserAdmin method: DataSource class	45
isCurrentUserAuthorized method: DataSource class	46
onDelete method: DataSource class	47
onSave method: DataSource class	47
resetParameters method: DataSource class	47
DataSource Class Properties	48
AdminPersonalizationPage property: DataSource class	48
AllowCustomParameters property: DataSource class	48
AllowRealTimeFeedSecurity property: DataSource class	48
DataSourceType property: DataSource class	49
DefaultFeedAttributes property: DataSource class	49
DefaultIBOperationName property: DataSource class	49
Description property: DataSource class	49
HasParameters property: DataSource class	49
HasSettings property: DataSource class	49
IBOperations property: DataSource class	50
ID property: DataSource class	50
LongDescription property: DataSource class	50

ObjectType property: DataSource class	50
Parameters property: DataSource class	50
ParametersCompleted property: DataSource class	50
Parent property: DataSource class	51
PortalSpecificPersonalization property: DataSource class	51
Settings property: DataSource class	51
SettingsCompleted property: DataSource class	51
UserPersonalizationPage property: DataSource class	51
Utility property: DataSource class	52
DataSourceParameter Class	52
DataSourceParameter Class Constructor	52
DataSourceParameter method: DataSourceParameter class	52
DataSourceParameter Class Methods	53
addUserValue method: DataSourceParameter class	53
clone method: DataSourceParameter class	53
equals method: DataSourceParameter class	54
resetUserValues method: DataSourceParameter class	54
setRangeFromFieldTranslates method: DataSourceParameter class	55
validateValue method: DataSourceParameter class	55
DataSourceParameter Class Properties	56
AllowChangesToRequired property: DataSourceParameter class	56
DefaultValue property: DataSourceParameter class	56
DefaultValueForDisplay property: DataSourceParameter class	56
Description property: DataSourceParameter class	56
EditType property: DataSourceParameter class	56
EvaluatedValue property: DataSourceParameter class	57
FieldType property: DataSourceParameter class	57
ID property: DataSourceParameter class	57
Name property: DataSourceParameter class	58
ObjectType property: DataSourceParameter class	58
Parent property: DataSourceParameter class	58
PromptTable property: DataSourceParameter class	58
Range property: DataSourceParameter class	58
Required property: DataSourceParameter class	58
SkipValidityChecks property: DataSourceParameter class	59
UsageType property: DataSourceParameter class	59
UserValues property: DataSourceParameter class	59
Utility property: DataSourceParameter class	59
Value property: DataSourceParameter class	60
ValueForDisplay property: DataSourceParameter class	60
DataSourceParameterValue Class	60
DataSourceParameterValue Class Constructor	61

DataSourceParameterValue method: DataSourceParameterValue class	61
DataSourceParameterValue Class Methods	61
clone method: DataSourceParameterValue class	61
equals method: DataSourceParameterValue class	62
DataSourceParameterValue Class Properties	62
Description property: DataSourceParameterValue class	62
ID property: DataSourceParameterValue class	62
Name property: DataSourceParameterValue class	63
ObjectType property: DataSourceParameterValue class	63
OrderNumber property: DataSourceParameterValue class	63
Parent property: DataSourceParameterValue class	63
Value property: DataSourceParameterValue class	63
DataSourceSetting Class	63
DataSourceSetting Class Constructor	64
DataSourceSetting method: DataSourceSetting class	64
DataSourceSetting Class Methods	64
clone method: DataSourceSetting class	64
equals method: DataSourceSetting class	65
setRangeFromFieldTranslates method: DataSourceSetting class	65
DataSourceSetting Class Properties	65
DefaultValue property: DataSourceSetting class	66
DisplayOnly property: DataSourceSetting class	66
EditType property: DataSourceSetting class	66
Enabled property: DataSourceSetting class	66
FieldType property: DataSourceSetting class	67
ID property: DataSourceSetting class	67
LongName property: DataSourceSetting class	67
Name property: DataSourceSetting class	67
ObjectType property: DataSourceSetting class	67
Parent property: DataSourceSetting class	68
PromptTable property: DataSourceSetting class	68
Range property: DataSourceSetting class	68
RefreshOnChange property: DataSourceSetting class	68
RelatedFieldValue property: DataSourceSetting class	68
Required property: DataSourceSetting class	68
ShowRelatedField property: DataSourceSetting class	69
Utility property: DataSourceSetting class	69
Value property: DataSourceSetting class	70
Visible property: DataSourceSetting class	70
Utility Class	70
Utility Class Constructor	70
Utility method: Utility class	70

Utility Class Methods	71
dateStringToUserPref method: Utility class	71
datetimeToString method: Utility class	71
dateToString method: Utility class	71
decodeXML method: Utility class	72
encodeXML method: Utility class	73
evaluateSysVar method: Utility class	74
genNameSpaceID method: Utility class	74
getExceptionText method: Utility class	74
getFeedDoc method: Utility class	75
getFeedMimeType method: Utility class	76
getFieldTranslates method: Utility class	76
getNodeValue method: Utility class	77
getUserDateFormat method: Utility class	78
getUserDatetimeFormat method: Utility class	78
getUserInfo method: Utility class	78
httpStringToDatetime method: Utility class	79
join method: Utility class	79
join2D method: Utility class	80
setMessageHeadersAndMimeType method: Utility class	81
setNodeValue method: Utility class	82
showException method: Utility class	82
showInvalidValueException method: Utility class	83
split method: Utility class	83
split2D method: Utility class	84
stringToDate method: Utility class	85
stringToDatetime method: Utility class	85
validateSysVar method: Utility class	86
viewStringAsAttachment method: Utility class	86
Utility Class Properties	87
ATTACHMENT_URL property: Utility class	87
AUTHTYPE_PERM property: Utility class	87
AUTHTYPE_ROLE property: Utility class	88
DSPARAMETER_INCREMENTAL property: Utility class	88
DSPARAMETER_MAXROW property: Utility class	88
DSPARAMETER_SF_MAXMINUTES property: Utility class	88
DSPARAMETER_SF_PAGING property: Utility class	89
EDITTYPE_NOTABLEEDIT property: Utility class	89
EDITTYPE_PROMPTTABLE property: Utility class	89
EDITTYPE_TRANSLATETABLE property: Utility class	89
EDITTYPE_YESNO property: Utility class	90
FEEDATTRIBUTE_AUTHOR property: Utility class	90

FEEDATTRIBUTE_CLOUD property: Utility class	90
FEEDATTRIBUTE_COMPLETE property: Utility class	90
FEEDATTRIBUTE_CONTRIBUTOR property: Utility class	90
FEEDATTRIBUTE_COPYRIGHT property: Utility class	91
FEEDATTRIBUTE_EXPIRES property: Utility class	91
FEEDATTRIBUTE_ICONURL property: Utility class	91
FEEDATTRIBUTE_LOGOURL property: Utility class	91
FEEDATTRIBUTE_MANAGINGEDITOR property: Utility class	91
FEEDATTRIBUTE_MAXAGE property: Utility class	91
FEEDATTRIBUTE_PERSINSTRUCTION property: Utility class	91
FEEDATTRIBUTE_RATING property: Utility class	92
FEEDATTRIBUTE_SKIPDAYS property: Utility class	92
FEEDATTRIBUTE_SKIPHOURS property: Utility class	92
FEEDATTRIBUTE_TEXTINPUT property: Utility class	92
FEEDATTRIBUTE_TTL property: Utility class	92
FEEDATTRIBUTE_WEBMASTER property: Utility class	92
FEEDATTRIBUTE_XSL property: Utility class	93
FEEDAUTHTYPE_ALL property: Utility class	93
FEEDAUTHTYPE_ANONYMOUS property: Utility class	93
FEEDAUTHTYPE_DEFAULT property: Utility class	93
FEEDCACHETYPE_NONE property: Utility class	93
FEEDCACHETYPE_PRIVATE property: Utility class	93
FEEDCACHETYPE_PUBLIC property: Utility class	93
FEEDCACHETYPE_ROLE property: Utility class	94
FEEDFORMAT_ATOM10 property: Utility class	94
FEEDSECUTYPE_PUBLIC property: Utility class	94
FEEDSECUTYPE_REALTIME property: Utility class	94
FEEDSECUTYPE_SELECTED property: Utility class	94
FEEDTEMPLATE_NO property: Utility class	94
FEEDTEMPLATE_YES property: Utility class	95
FEEDTYPE_DYNAMIC property: Utility class	95
FEEDTYPE_PREPUBLISHED property: Utility class	95
FIELDTYPE_CHARACTER property: Utility class	95
FIELDTYPE_DATE property: Utility class	95
FIELDTYPE_DATETIME property: Utility class	95
FIELDTYPE_LONGCHARACTER property: Utility class	96
FIELDTYPE_NUMBER property: Utility class	96
FIELDTYPE_SIGNEDNUMBER property: Utility class	96
FIELDTYPE_TIME property: Utility class	96
IBSOTYPE_ASYNC property: Utility class	96
IBSOTYPE_SYNC property: Utility class	96
IBSOTYPE_UNKNOWN property: Utility class	97

ICONURL_FEED_A property: Utility class	97
ICONURL_FEED_IA property: Utility class	97
INCREMENTALOPTION_NO property: Utility class	97
INCREMENTALOPTION_YES property: Utility class	97
LINKTYPE_FIRST property: Utility class	98
LINKTYPE_LAST property: Utility class	98
LINKTYPE_NEXT property: Utility class	98
LINKTYPE_PREVIOUS property: Utility class	98
MIMETYPE_ATOM property: Utility class	99
MIMETYPE_OPML property: Utility class	99
MIMETYPE_XML property: Utility class	99
OPERATINGMODE_AUTHORIZATION property: Utility class	99
OPERATINGMODE_DEFAULT property: Utility class	99
OPERATINGMODE_DELETION property: Utility class	100
OPERATINGMODE_EXECUTION property: Utility class	100
OPERATINGMODE_EXECUTION_NOENTRY property: Utility class	100
QUERYPARAMETER_CHILDFEEDID property: Utility class	100
QUERYPARAMETER_DATATYPEID property: Utility class	101
QUERYPARAMETER_DEFLOCALNODE property: Utility class	101
QUERYPARAMETER_DSSCOUNT property: Utility class	101
QUERYPARAMETER_DSSNAME property: Utility class	101
QUERYPARAMETER_DSSVALUE property: Utility class	101
QUERYPARAMETER_FEEDFORMAT property: Utility class	101
QUERYPARAMETER_FEEDID property: Utility class	101
QUERYPARAMETER_FEEDLIST property: Utility class	102
QUERYPARAMETER_FEEDTYPE property: Utility class	102
QUERYPARAMETER_IBTRANSID property: Utility class	102
QUERYPARAMETER_IFMODIFIEDSINCE property: Utility class	102
QUERYPARAMETER_IFNONEMATCH property: Utility class	102
QUERYPARAMETER_KEYWORD property: Utility class	102
QUERYPARAMETER_LANGUAGE property: Utility class	102
QUERYPARAMETER_NODENAME property: Utility class	103
QUERYPARAMETER_PAGENUM property: Utility class	103
QUERYPARAMETER_PORTALNAME property: Utility class	103
QUERYPARAMETER_PTPPB_SEARCH_MODE property: Utility class	103
QUERYPARAMETER_PTPPB_SEARCH_TEXT property: Utility class	103
RequestInfo property: Utility class	103
SF_MAXMINUTES_ALLMSGs property: Utility class	104
SF_MAXROWOPTION_ALLMSGs property: Utility class	104
SF_MAXROWOPTION_LATESTMSG property: Utility class	104
SF_PAGINGOPTION_NOPAGING property: Utility class	105
SF_PAGINGOPTION_SEGMENTED property: Utility class	105

SYSVAR_INVALID property: Utility class	106
USAGETYPE_ADMINSPECIFIED property: Utility class	106
USAGETYPE_FIXED property: Utility class	106
USAGETYPE_INTERNAL property: Utility class	106
USAGETYPE_NOTUSED property: Utility class	106
USAGETYPE_SYSVAR property: Utility class	106
USAGETYPE_USERSPECIFIED property: Utility class	107
XMLCHILDELEMENTS_CLOUD property: Utility class	107
XMLCHILDELEMENTS_PERSON property: Utility class	107
XMLCHILDELEMENTS_TEXTINPUT property: Utility class	107
XMLELEMENT_DAY property: Utility class	107
XMLELEMENT_DESCRIPTION property: Utility class	108
XMLELEMENT_DOMAIN property: Utility class	108
XMLELEMENT_EMAIL property: Utility class	108
XMLELEMENT_HOUR property: Utility class	108
XMLELEMENT_LINK property: Utility class	108
XMLELEMENT_NAME property: Utility class	108
XMLELEMENT_PATH property: Utility class	108
XMLELEMENT_PORT property: Utility class	109
XMLELEMENT_PROTOCOL property: Utility class	109
XMLELEMENT_REGISTERPROCEDURE property: Utility class	109
XMLELEMENT_TITLE property: Utility class	109
FeedDoc Class	109
FeedDoc Class Constructor	109
FeedDoc method: Feed class	110
FeedDoc Class Methods	110
addCategory method: FeedDoc class	110
addEntry method: FeedDoc class	111
datetimeToString method: FeedDoc class	112
deleteCategory method: FeedDoc class	112
deleteEntry method: FeedDoc class	113
equals method: FeedDoc class	114
getEntry method: FeedDoc class	114
resetEntries method: FeedDoc class	115
stringToDatetime method: FeedDoc class	115
FeedDoc Class Properties	116
AllowMoreEntries property: FeedDoc class	116
ApplicationRelease property: FeedDoc class	116
Categories property: FeedDoc class	116
ContentUrl property: FeedDoc class	116
Copyright property: FeedDoc class	117
Description property: FeedDoc class	117

Entries property: FeedDoc class	118
Expires property: FeedDoc class	118
FeedFormat property: FeedDoc class	118
FeedUrl property: FeedDoc class	118
FirstUrl property: FeedDoc class	119
Generator property: FeedDoc class	119
ID property: FeedDoc class	119
LastUrl property: FeedDoc class	120
Logo property: FeedDoc class	120
MaxAge property: FeedDoc class	120
MaxEntries property: FeedDoc class	121
NextUrl property: FeedDoc class	121
ObjectType property: FeedDoc class	121
PreviousUrl property: FeedDoc class	121
RootElement property: FeedDoc class	122
Title property: FeedDoc class	122
Updated property: FeedDoc class	122
FeedEntry Class	122
FeedEntry Class Constructor	123
FeedEntry method: Feed class	123
FeedEntry Class Methods	123
addCategory method: FeedEntry class	123
addContributor method: FeedEntry class	124
addEnclosure method: FeedEntry class	125
delete method: FeedEntry class	125
deleteCategory method: FeedEntry class	126
deleteContributor method: FeedEntry class	126
deleteEnclosure method: FeedEntry class	127
equals method: FeedEntry class	128
FeedEntry Class Properties	128
Author property: FeedEntry class	128
Categories property: FeedEntry class	128
Comments property: FeedEntry class	129
ContentUrl property: FeedEntry class	129
Contributors property: FeedEntry class	129
Copyright property: FeedEntry class	130
Description property: FeedEntry class	130
Enclosures property: FeedEntry class	130
Expires property: FeedEntry class	131
FeedDoc property: FeedEntry class	131
FullContent property: FeedEntry class	131
GUID property: FeedEntry class	131

ID property: FeedEntry class	132
MaxAge property: FeedEntry class	132
ObjectType property: FeedEntry class	132
Published property: FeedEntry class	133
Title property: FeedEntry class	133
Updated property: FeedEntry class	133
Additional Feed Examples	133
Implementing a Real-Time Feed Request Handler	134

25 Field Class

Understanding the Field Class	1
Considerations Using User Interface Properties	1
Shortcut Considerations	1
Data Type for a Field Object	2
Scope of a Field Object	2
Field Class Built-in Functions	2
Field Class Methods	2
AddDropDownItem method: Field class	2
AddFFClass method: Field class	4
ClearDropDownList method: Field class	4
CopyDisplayMask method: Field class	5
GetAuxFlag method: Field class	6
GetBaseName method: Field class	7
GetDNDField method: Field class	7
GetDNDRow method: Field class	8
GetDNDRowset method: Field class	9
GetDNDTargetField method: Field class	10
GetDNDTargetRow method: Field class	10
GetDNDTargetRowset method: Field class	11
GetLongLabel method: Field class	12
GetRelated method: Field class	13
GetShortLabel method: Field class	14
ReplaceFFClass method: Field class	15
RemoveDropDownItem method: Field class	16
SearchClear method: Field class	17
SetCursorPos method: Field class	18
SetDefault method: Field class	19
SetDisplayMask method: Field class	20
SetGroupletActionUrl method: Field class	22
SetGroupletDisplayIn method: Field class	23
SetGroupletEventMsg method: Field class	24

SetGroupletID method: Field class	25
SetGroupletImage method: Field class	26
SetGroupletImageUrl method: Field class	27
SetGroupletMOptions method: Field class	27
SetGroupletTargetID method: Field class	28
SetGroupletTimer method: Field class	29
SetGroupletType method: Field class	30
SetGroupletUrl method: Field class	32
SetImageUrl method: Field class	32
UnsetDisplayMask method: Field class	33
Field Class Properties	34
AriaAttributes property: Field class	34
AriaWrapperAttributes property: Field class	34
DataAreaCollapsed property: Field class	35
DecimalPosition property: Field class	35
DisplayFormat property: Field class	36
DisplayOnly property: Field class	37
DisplayZero property: Field class	37
DisplayZeroChanged property: Field class	38
Draggable property: Field class	38
Droppable property: Field class	39
EditError property: Field class	39
Enabled property: Field class	40
ErrorDisplay property: Field class	40
FieldLength property: Field class	40
FindDisplay property: Field class	41
ForceUpdateOnce property: Field class	42
FormatLength property: Field class	42
FormattedValue property: Field class	42
FreeFormStyleName property: Field class	43
HoverText property: Field class	44
HtmlAttributes property: Field class	44
HtmlInputType property: Field class	45
IsAltKey property: Field class	45
IsAuditFieldAdd property: Field class	46
IsAuditFieldChg property: Field class	46
IsAuditFieldDel property: Field class	46
IsAutoUpdate property: Field class	46
IsChanged property: Field class	46
IsDateRangeEdit property: Field class	47
IsDescKey property: Field class	47
IsDuplKey property: Field class	47

IsEditTable property: Field class	47
IsEditXlat property: Field class	47
IsFromSearchField property: Field class	48
IsGroupletAsLink property: Field class	48
IsHyperlink property: Field class	48
IsInBuf property: Field class	48
IsKey property: Field class	49
IsListItem property: Field class	49
IsNotUsed property: Field class	49
IsRequired property: Field class	50
IsRichTextEnabled property: Field class	50
IsSearchItem property: Field class	50
IsSystem property: Field class	50
IsThroughSearchField property: Field class	50
IsUseDefaultLabel property: Field class	51
IsYesNo property: Field class	51
JavaScriptEvents property: Field class	51
Label property: Field class	52
LabelImage property: Field class	53
LabelStyle property: Field class	53
LongTranslateValue property: Field class	54
MessageNumber property: Field class	55
MessageSetNumber property: Field class	55
MouseOverMsgNum property: Field class	56
MouseOverMsgSet property: Field class	56
Name property: Field class	57
OriginalValue property: Field class	57
OverridePromptTableName property: Field class	58
ParentRecord property: Field class	58
PlaceholderText property: Field class	59
PromptTableName property: Field class	59
SearchDefault property: Field class	59
SearchEdit property: Field class	60
SetComponentChanged property: Field class	61
ShortTranslateValue property: Field class	61
ShowRequiredFieldCue property: Field class	62
SmartZero property: Field class	62
SqlText property: Field class	63
StoredFormat property: Field class	63
Style property: Field class	64
Type property: Field class	65
Value property: Field class	65

26 File Class

Understanding File Layout	1
Data Type of a File Object	1
Scope of a File Object	1
File Security Considerations	2
File Access Interruption Recovery	2
Plain Text Files	3
Automatic PeopleCode Generation	4
End Of Line Considerations	5
File Layout Error Processing	5
Working With Relative Paths	7
File Class Built-in Functions	8
File Class Methods	8
Close method: File class	8
CreateRowset method: File class	9
Delete method: File class	10
GenerateHttpURL method: File class	11
GetBase64StringFromBinary method: File class	12
GetPosition method: File class	12
GetString method: File class	14
Open method: File class	15
ReadFileStream method: File class	21
ReadLine method: File class	22
ReadRowset method: File class	23
SetFileId method: File class	26
SetFileLayout method: File class	28
SetPosition method: File class	29
SetRecTerminator method: File class	30
WriteBase64StringToBinary method: File class	31
WriteLine method: File class	32
WriteRaw method: File class	34
WriteRecord method: File class	34
WriteRowset method: File class	37
WriteString method: File class	39
File Class Properties	39
CurrentRecord property: File class	40
IgnoreInvalidId property: File class	40
IsError property: File class	41
IsNewFileId property: File class	41

IsOpen property: File class	42
Name property: File class	42
TerminateLines property: File class	43
UseSpaceForNull property: File class	43
ZeroExtend property: File class	46
File Layout Examples	47
WriteRecord Example	48
ReadRecord Example	51
WriteRowset Example	52
ReadRowset Example	56
File Rowset Considerations	57
Application Engine Example	57
Multiple File Layouts	60
Reading Multiple File Layouts	61
Writing Multiple File Layouts	63

27 Fluid Page Utilities Classes

Understanding the Fluid Page Utilities Classes	1
Banner Class	1
Banner Class Methods	2
ClearConfirmation method: Banner class	2
GetFixedPageTitleField method: Banner class	3
GetPageTitleField method: Banner class	3
SetConfirmationMessage method: Banner class	4
SetContextMenuLabel method: Banner class	5
SetFixedPageTitle method: Banner class	5
SetPageTitle method: Banner class	6
SetVisibilityActionList method: Banner class	6
SetVisibilityAddto method: Banner class	7
SetVisibilityContextMenu method: Banner class	8
SetVisibilityHelp method: Banner class	9
SetVisibilityHome method: Banner class	9
SetVisibilityMyPreferences method: Banner class	10
SetVisibilityNavbar method: Banner class	11
SetVisibilityNewWindow method: Banner class	12
SetVisibilityNotifications method: Banner class	13
SetVisibilityNotify method: Banner class	14
SetVisibilityQAB method: Banner class	14
SetVisibilitySearch method: Banner class	15
SetVisibilitySignout method: Banner class	16
Banner Class Properties	17

isGuidedDisplay property: Banner class	17
DynamicScreenReader Class Properties	17
SuppressCommonActionItem property: DynamicScreenReader class	18
PanelController Class	18
Understanding Panel Modes	18
PanelController Class Methods	19
GetSide1Mode method: PanelController class	19
GetSide1Panel method: PanelController class	20
GetSide2Mode method: PanelController class	20
GetSide2Panel method: PanelController class	21
Initialize method: PanelController class	22
IsSide1Collapsible method: PanelController class	23
IsSide1CollisionInterPage method: PanelController class	23
IsSide1CollisionIntraPage method: PanelController class	24
IsSide1Enabled method: PanelController class	24
IsSide1Fixed method: PanelController class	25
IsSide1FullWidth method: PanelController class	26
IsSide1HasCollision method: PanelController class	26
IsSide1Hidden method: PanelController class	27
IsSide1Open method: PanelController class	28
IsSide1Overlay method: PanelController class	28
IsSide2Collapsible method: PanelController class	29
IsSide2Enabled method: PanelController class	30
IsSide2Fixed method: PanelController class	30
IsSide2FullWidth method: PanelController class	31
IsSide2Hidden method: PanelController class	32
IsSide2Open method: PanelController class	32
IsSide2Overlay method: PanelController class	33
Refresh method: PanelController class	34
SetSide1FullWidth method: PanelController class	34
SetSide1Hidden method: PanelController class	35
SetSide1ModeCollapsible method: PanelController class	36
SetSide1ModeFixed method: PanelController class	37
SetSide1ModeOverlay method: PanelController class	37
SetSide1OpenState method: PanelController class	38
SetSide1OverrideMediaQueries method: PanelController class	39
SetSide2FullWidth method: PanelController class	40
SetSide2Hidden method: PanelController class	41
SetSide2ModeCollapsible method: PanelController class	42
SetSide2ModeFixed method: PanelController class	43
SetSide2ModeOverlay method: PanelController class	43
SetSide2OpenState method: PanelController class	44

SetSide2OverrideMediaQueries method: PanelController class	45
UpdatePanel method: PanelController class	46
UseForceOpenModeSide1 method: PanelController class	47
UseForceOpenModeSide2 method: PanelController class	48
UsePersistentOpenModeSide1 method: PanelController class	49
UsePersistentOpenModeSide2 method: PanelController class	50
PanelController Class Properties	51
AutoUpdate property: PanelController class	51
InDefaultMode property: PanelController class	51
Utils Class	51
Confirmation Message Methods	51
Toggle Button Methods	52
Viewport Methods	52
Miscellaneous Methods	52
Utils Class Methods	52
AnnounceText method: Utils class	52
ClearConfirmationMessage method: Utils class	53
CloseConfirmationMessage method: Utils class	54
GetButtonState method: Utils class	55
GetDefaultViewport method: Utils class	55
SetButtonState method: Utils class	56
SetConfirmationMessage method: Utils class	57
SetCustomViewport method: Utils class	58
SetDefaultViewport method: Utils class	58
SetFavIcon method: Utils class	59
ToggleButtonState method: Utils class	60

28 GlobalEventManager Class

Understanding the GlobalEventManager Class	1
GlobalEventManager Class Methods	1
CreateGlobalEventManagerConfig method: GlobalEventManager class	1
DeleteGlobalEventManagerConfig method: GlobalEventManager class	2

29 Grid Classes

Understanding Grid and GridColumn Classes	1
Shortcut Considerations	2
The Grid Class in PeopleCode	2
Data Type for a Grid or Grid Column Object	3
Scope of a Grid or Grid Column Object	3
Grid Class Built-in Function	4

Grid Class Methods	4
EnableColumns method: Grid class	4
GetColumn method: Grid class	5
LabelColumns method: Grid class	7
SetProperties method: Grid class	7
SetRowHeader method: Grid class	8
ShowColumns method: Grid class	10
Grid Class Properties	10
FreeFormStyleName property: Grid class	10
gridcolumn property: Grid class	11
Label property: Grid class	11
Layout property: Grid class	12
PersistMenuOption property: Grid class	13
RowHighlight property: Grid class	13
Selector property: Grid class	14
SummaryText property: Grid class	16
GridColumn Class	16
GridColumn Class Properties	16
Enabled property: GridColumn class	16
IncludeLabelsInGridCells property: GridColumn class	17
IsUserHidden property: GridColumn class	18
Label property: GridColumn class	18
Name property: GridColumn class	19
RowHeader property: GridColumn class	19
Visible property: GridColumn class	20

30 Internet Script Classes (iScript)

Understanding Internet Script Classes	1
URL vs. URI	2
Web Libraries	2
iScript Security	4
When to Use an iScript	5
Style Sheets and Styles	5
Other Considerations	6
Details of an iScript URL	6
The Generate Functions	7
Error Handling	8
Scope of the Internet Script Classes	8
Data Types of the iScript Classes	9
Internet Script Classes	9
Request Class	9

Response	10
Cookies	10
Internet Script Classes Built-in Functions	10
Request Class Methods	11
FormFactor method: Request class	11
GetContentBody method: Request class	12
GetCookieNames method: Request class	13
GetCookieValue method: Request class	13
GetDeviceInfo method: Request class	13
GetHeader method: Request class	15
GetHeaderNames method: Request class	15
GetHelpURL method: Request class	15
GetParameter method: Request class	16
GetParameterNames method: Request class	16
GetParameterValues method: Request class	16
Request Class Properties	16
AuthTokenDomain property: Request class	17
AuthType property: Request class	17
BrowserDeviceFormFactor property: Request class	17
BrowserDeviceType property: Request class	18
BrowserFluidCapable property: Request class	19
BrowserPlatform property: Request class	19
BrowserPlatformClass property: Request class	19
BrowserType property: Request class	20
BrowserTypeClass property: Request class	20
BrowserVersion property: Request class	21
ByPassSignIn property: Request class	21
ContentURI property: Request class	21
ExpireMeta property: Request class	21
ExtraLarge property: Request class	22
FullURI property: Request class	22
HTTPMethod property: Request class	23
Large property: Request class	23
LogoutURL property: Request class	24
Medium property: Request class	24
PathInfo property: Request class	24
Protocol property: Request class	25
QueryString property: Request class	25
RelativeURL property: Request class	25
RemoteAddr property: Request class	25
RemoteHost property: Request class	26
RequestURI property: Request class	26

RemoteUser property: Request class	26
Scheme property: Request class	27
ServerName property: Request class	27
ServerPort property: Request class	28
ServletPath property: Request class	28
Small property: Request class	28
Timeout property: Request class	29
Response Class	29
Response Class Methods	29
Clear method: Response class	29
CreateCookie method: Response class	29
GetCookie method: Response class	30
GetCookieNames method: Response class	30
GetHeader method: Response class	30
GetHeaderNames method: Response class	31
GetImageURL method: Response class	31
GetJavaScriptURL method: Response class	32
GetStyleSheetURL method: Response class	33
RedirectURL method: Response class	33
SetContentType method: Response class	35
SetHeader method: Response class	35
UseSimpleURL method: Response class	35
Write method: Response class	36
WriteLine method: Response class	37
Response Class Properties	37
Charset property: Response class	37
DefaultStyleSheetName property: Response class	37
Cookie Class	37
Cookie Class Properties	37
Domain property: Cookie class	38
MaxAge property: Cookie class	38
Name property: Cookie class	38
Path property: Cookie class	38
Secure property: Cookie class	39
Value property: Cookie class	39

31 Java Class

Understanding Java Class	1
Supported Versions of Java	1
Java Packages and Classes Delivered with PeopleTools	1
System Setup for Java Classes	2

From PeopleCode to Java	4
State Management Concerns	4
CreateJavaObject Example	5
CreateJavaArray Example	5
GetJavaClass Example	6
From Java to PeopleCode	6
SysVar Java Class	6
SysCon Java Class	6
Func Java Class	7
Name Java Class	7
Accessing PeopleCode Objects	7
Using Application Classes From Java to PeopleCode	9
PeopleCode and Java Data Types Mapping	10
Considerations When Using the PeopleCode Java Functions	10
Copying Arrays of Data Between PeopleCode and Java	11
Considerations Working with the Java Garbage Collector	12
Error Handling and the PeopleCode Java Functions	12
The Java Debugging Environment	12
Data Type of a Java Object	13
Scope of a Java Object	13
PeopleCode Java Built-in Functions	13

32 JSON Classes

Understanding JSON Classes	1
JsonObject Class	1
JsonObject Class Methods	1
AddJSONArray method: JsonObject class	1
AddJsonObject method: JsonObject class	2
AddProperty method: JsonObject class	2
GetAsString method: JsonObject class	3
GetBoolean method: JsonObject class	3
GetBooleanProperty method: JsonObject class	4
GetChildCount method: JsonObject class	4
GetDate method: JsonObject class	5
GetDateTime method: JsonObject class	5
GetFloat method: JsonObject class	6
GetInteger method: JsonObject class	6
GetJSONArray method: JsonObject class	7
GetJsonNode method: JsonObject class	8
GetJsonObject method: JsonObject class	8
GetNumber method: JsonObject class	9

GetPropertyAt method: JsonObject class	9
GetString method: JsonObject class	10
GetTime method: JsonObject class	10
IsExist method: JsonObject class	11
IsJsonArray method: JsonObject class	11
IsJsonObject method: JsonObject class	12
IsNullProperty method: JsonObject class	12
ToString method: JsonObject class	13
JsonObject Class Properties	13
ChildCount property: JsonObject class	14
JsonValue Class	14
JsonValue Class Methods	14
GetBoolean method: JsonValue class	14
GetDate method: JsonValue class	15
GetDateTime method: JsonValue class	15
GetInteger method: JsonValue class	16
GetNumber method: JsonValue class	16
GetString method: JsonValue class	17
GetTime method: JsonValue class	17
GetValue method: JsonValue class	18
IsNull method: JsonValue class	18
SetBoolean method: JsonValue class	18
SetDate method: JsonValue class	19
SetDateTime method: JsonValue class	19
SetFalse method: JsonValue class	20
SetInteger method: JsonValue class	20
SetNull method: JsonValue class	21
SetNumber method: JsonValue class	21
SetString method: JsonValue class	22
SetTrue method: JsonValue class	22
ToString method: JsonValue class	23
JsonValue Class Properties	23
ValueType property: JsonValue class	23
JsonArray Class	24
JsonArray Class Methods	24
AddElement method: JsonArray class	24
AddJsonArrayElement method: JsonArray class	24
AddJsonObjectElement method: JsonArray class	25
AddNullElement method: JsonArray class	25
GetAsString method: JsonArray class	26
GetBoolean method: JsonArray class	26
GetDate method: JsonArray class	27

GetDateTime method: JsonArray class	27
GetFloat method: JsonArray class	28
GetInteger method: JsonArray class	28
GetJsonArray method: JsonArray class	29
GetJsonNode method: JsonArray class	29
GetJsonObject method: JsonArray class	30
GetNumber method: JsonArray class	30
GetString method: JsonArray class	31
GetTime method: JsonArray class	31
GetType method: JsonArray class	32
IsNull method: JsonArray class	32
Length method: JsonArray class	33
Pop method: JsonArray class	33
Remove method: JsonArray class	34
ToString method: JsonArray class	34
JsonArray Class Properties	35
Size property: JsonArray class	35
JsonNode Class	35
JsonNode Class Methods	35
GetBoolean property: JsonNode class	35
GetFloat property: JsonNode class	36
GetInteger property: JsonNode class	36
GetJsonArray property: JsonNode class	37
GetJsonObject property: JsonNode class	37
GetJsonValue property: JsonNode class	37
GetNodeType property: JsonNode class	38
GetNumber property: JsonNode class	39
GetParentNode property: JsonNode class	39
GetString property: JsonNode class	39
GetValueType property: JsonNode class	40
IsJsonArray property: JsonNode class	41
IsJsonObject property: JsonNode class	41
IsJsonValue property: JsonNode class	42
IsNull property: JsonNode class	42
SetBoolean property: JsonNode class	42
SetDate property: JsonNode class	43
SetDateTime property: JsonNode class	43
SetFalse property: JsonNode class	44
SetFloat property: JsonNode class	44
SetInteger property: JsonNode class	45
SetJsonArray property: JsonNode class	45
SetJsonObject property: JsonNode class	46

SetJsonValue property: JsonNode class	46
SetNodeName property: JsonNode class	47
SetNull property: JsonNode class	47
SetNumber property: JsonNode class	48
SetString property: JsonNode class	48
SetTime property: JsonNode class	49
SetTrue property: JsonNode class	49
ToString property: JsonNode class	50
JsonNode Class Properties	50
NodeType property: JsonNode class	50
ValueType property: JsonNode class	51
JsonBuilder Class	51
JsonBuilder Class Methods	51
AddElement method: JsonBuilder class	51
AddNullElement method: JsonBuilder class	52
AddNullProperty method: JsonBuilder class	52
AddProperty method: JsonBuilder class	53
EndArray method: JsonBuilder class	53
EndObject method: JsonBuilder class	54
GetBuildMode method: JsonBuilder class	54
GetRootNode method: JsonBuilder class	55
StartArray method: JsonBuilder class	55
StartArrayReturnsTrue method: JsonBuilder class	56
StartObject method: JsonBuilder class	56
StartObjectReturnsTrue method: JsonBuilder class	57
ToString method: JsonBuilder class	57
JsonBuilder Class Properties	58
BuildMode property: JsonBuilder class	58
JsonParser Class	58
JsonParser Class Methods	58
GetRootObject method: JsonParser class	58
Parse method: JsonParser class	59
ToString method: JsonParser class	59

33 Mail Classes

Understanding PeopleSoft MultiChannel Framework Mail Classes	1
PeopleSoft MultiChannel Framework Mail Classes	1
Scope of the Mail Classes	1
Data Types of the Mail Classes	1
Importing Mail Classes	2
Creating a Mail Object	3

Using the Mail Classes	3
Life Cycle of an Outbound Email	3
Delivery Status Notification and Return Receipts	4
Priority	4
MCFBodyPart and MCFEmail Considerations	5
Retrieving Email From a Mail Server With the MCFGetMail Class	6
Structure of Rowset Used for Email Information	6
Error Messages Returned by MCFGetMail Class Methods	12
Mail Classes Constructors	14
MCFBodyPart method: mail classes class	14
MCFGetMail method: mail classes class	14
MCFOutboundEmail method: mail classes class	14
MCFMailStore method: mail classes class	14
SMTPSession method: mail classes class	15
MCFBodyPart Class	15
MCFBodyPart Class Methods	15
AddHeader method: MCFBodyPart class	15
GetHeader method: MCFBodyPart class	16
GetHeaderCount method: MCFBodyPart class	17
GetHeaderName method: MCFBodyPart class	17
GetHeaderNames method: MCFBodyPart class	18
GetHeaderValues method: MCFBodyPart class	18
GetUnparsedHeaders method: MCFBodyPart class	19
SetAttachmentContent method: MCFBodyPart class	20
MCFBodyPart Class Properties	21
AttachmentURL property: MCFBodyPart class	21
Charset property: MCFBodyPart class	21
ContentType property: MCFBodyPart class	22
Description property: MCFBodyPart class	22
Disposition property: MCFBodyPart class	22
Filename property: MCFBodyPart class	22
FilePath property: MCFBodyPart class	23
FilePathType property: MCFBodyPart class	23
IsAttachment property: MCFBodyPart class	23
MultiPart property: MCFBodyPart class	24
Text property: MCFBodyPart class	24
MCFEmail Class	24
MCFEmail Class Properties	24
BCC property: MCFEmail class	24
BounceTo property: MCFEmail class	25
CC property: MCFEmail class	25
From property: MCFEmail class	25

Importance property: MCFEmail class	25
Priority property: MCFEmail class	26
Recipients property: MCFEmail class	26
RefIDs property: MCFEmail class	26
ReplyIDs property: MCFEmail class	26
ReplyTo property: MCFEmail class	27
Sender property: MCFEmail class	27
Sensitivity property: MCFEmail class	27
SMIMEEncryption property: MCFEmail class	27
SMIMESign property: MCFEmail class	28
Subject property: MCFEmail class	28
Text property: MCFEmail class	28
MCFGetMail Class Methods	28
CreateQuarantineFolder method: MCFGetMail class	28
GetCount method: MCFGetMail class	29
GetEmailCount method: MCFGetMail class	29
ReadAllEmailHeadersWithAttach method: MCFGetMail class	30
ReadEmails method: MCFGetMail class	31
ReadEmailsWithAttach method: MCFGetMail class	32
ReadEmailsWithUID method: MCFGetMail class	33
ReadEmailWithAttach method: MCFGetMail class	34
ReadHeaders method: MCFGetMail class	35
RemoveEmail method: MCFGetMail class	35
RemoveEmails method: MCFGetMail class	37
SetMCFEmail method: MCFGetMail class	37
MCFGetMail Class Properties	38
AttachmentRoot property: MCFGetMail class	38
ContentTypes property: MCFGetMail class	39
ErrorCount property: MCFGetMail class	39
IBNode property: MCFGetMail class	39
MailServer property: MCFGetMail class	40
Password property: MCFGetMail class	40
QuarantineCount property: MCFGetMail class	41
QuarantineFolder property: MCFGetMail class	41
Status property: MCFGetMail class	41
UserID property: MCFGetMail class	42
MCFInboundEmail Class	42
MCFInboundEmail Class Methods	42
DumpToFile method: MCFInboundEmail class	42
GetAttachments method: MCFInboundEmail class	43
GetFrom method: MCFInboundEmail class	44
GetParts method: MCFInboundEmail class	44

GetSender method: MCFInboundEmail class	45
ReadFromDatabase method: MCFInboundEmail class	45
SaveToDatabase method: MCFInboundEmail class	46
MCFInboundEmail Class Properties	46
AttachList property: MCFInboundEmail class	46
AttachSizes property: MCFInboundEmail class	46
DttmReceived property: MCFInboundEmail class	47
DttmSaved property: MCFInboundEmail class	47
DttmSent property: MCFInboundEmail class	47
IBNode property: MCFInboundEmail class	48
Language property: MCFInboundEmail class	48
MessageID property: MCFInboundEmail class	48
NotifyCC property: MCFInboundEmail class	48
NotifyTo property: MCFInboundEmail class	48
OffsetReceived property: MCFInboundEmail class	49
OffsetSent property: MCFInboundEmail class	49
Server property: MCFInboundEmail class	49
Size property: MCFInboundEmail class	49
Status property: MCFInboundEmail class	50
UID property: MCFInboundEmail class	50
User property: MCFInboundEmail class	50
MCFMailStore Class	50
MCFMailStore Import Statements	50
MCFMailStore Methods	50
AuthorizeEmailAttach method: MCFMailStore class	51
DeleteEmail method: MCFMailStore class	52
RetrieveEmail method: MCFMailStore class	52
StoreEmail method: MCFMailStore class	53
MCFMailUtil Class	54
MCFMailUtil Class Methods	54
DecodeText method: MCFMailUtil class	54
DecodeWord method: MCFMailUtil class	55
EncodeText method: MCFMailUtil class	56
EncodeWord method: MCFMailUtil class	58
GetErrorMsgParam method: MCFMailUtil class	59
IsDomainNameValid method: MCFMailUtil class	60
IsEmailServerAvailable method: MCFMailUtil class	61
ParseRichTextHtml method: MCFMailUtil class	62
ValidateAddress method: MCFMailUtil class	62
MCFMailUtil Class Properties	64
badaddresses property: MCFMailUtil class	64
ErrorDescription property: MCFMailUtil class	64

ErrorDetails property: MCFMailUtil class	65
ErrorMsgParamsCount property: MCFMailUtil class	65
imagesLocation property: MCFMailUtil class	65
MessageNumber property: MCFMailUtil class	66
MessageSetNumber property: MCFMailUtil class	66
MCFMultiPart Class	66
MCFMultiPart Class Methods	66
AddBodyPart method: MCFMultiPart class	67
GetBodyPart method: MCFMultiPart class	67
GetContentType method: MCFMultiPart class	67
GetCount method: MCFMultiPart class	68
MCFMultiPart Class Property	68
SubType property: MCFMultiPart class	68
MCFOutboundEmail Class	68
MCFOutboundEmail Class Methods	69
AddAttachment method: MCFEmail class	69
AddHeader method: MCFEmail class	70
AddImportedAttachment method: MCFEmail class	71
GetErrorMsgParam method: MCFEmail class	72
GetHeader method: MCFEmail class	72
GetHeaderCount method: MCFEmail class	73
GetHeaderName method: MCFEmail class	74
GetHeaderNames method: MCFEmail class	74
GetHeaderValues method: MCFEmail class	75
Send method: MCFEmail class	75
SetSMTPParam method: MCFEmail class	76
MCFOutboundEmail Class Properties	77
BackupSMTPPort property: MCFOutboundEmail class	77
BackupSMTPServer property: MCFOutboundEmail class	77
BackupSMTPSSLClientCertAlias property: MCFOutboundEmail class	78
BackupSMTPSSLPort property: MCFOutboundEmail class	78
BackupSMTPUserName property: MCFOutboundEmail class	78
BackupSMTPUserPassword property: MCFOutboundEmail class	78
BackupSMTPUseSSL property: MCFOutboundEmail class	78
BCC property: MCFOutboundEmail class	79
BounceTo property: MCFOutboundEmail class	79
CC property: MCFOutboundEmail class	79
Charset property: MCFOutboundEmail class	79
ContentLanguage property: MCFOutboundEmail class	80
ContentType property: MCFOutboundEmail class	80
DefaultCharSet property: MCFOutboundEmail class	80
Description property: MCFOutboundEmail class	80

Disposition property: MCFOutboundEmail class	81
ErrorDescription property: MCFOutboundEmail class	81
ErrorDetails property: MCFOutboundEmail class	81
ErrorMsgParamsCount property: MCFOutboundEmail class	82
Filename property: MCFOutboundEmail class	82
FilePath property: MCFOutboundEmail class	82
FilePathType property: MCFOutboundEmail class	82
From property: MCFOutboundEmail class	83
Importance property: MCFOutboundEmail class	83
InvalidAddresses property: MCFOutboundEmail class	84
IsAuthenticationReqd property: MCFOutboundEmail class	84
IsOkToSendPartial property: MCFOutboundEmail class	84
IsReturnReceiptReqd property: MCFOutboundEmail class	85
MessageNumber property: MCFOutboundEmail class	85
MessageSetNumber property: MCFOutboundEmail class	85
MultiPart property: MCFOutboundEmail class	86
Priority property: MCFOutboundEmail class	86
Recipients property: MCFOutboundEmail class	86
RefIDs property: MCFOutboundEmail class	87
ReplyIDs property: MCFOutboundEmail class	87
ReplyTo property: MCFOutboundEmail class	87
ResultOfSend property: MCFOutboundEmail class	87
Sender property: MCFOutboundEmail class	88
Sensitivity property: MCFOutboundEmail class	88
SMTPPort property: MCFOutboundEmail class	88
SMTPServer property: MCFOutboundEmail class	88
SMTPSSLClientCertAlias property: MCFOutboundEmail class	89
SMTPSSLPort property: MCFOutboundEmail class	89
SMTPUserName property: MCFOutboundEmail class	89
SMTPUserPassword property: MCFOutboundEmail class	89
SMTPUseSSL property: MCFOutboundEmail class	90
StatusNotifyOptions property: MCFOutboundEmail class	90
StatusNotifyReturn property: MCFOutboundEmail class	90
Subject property: MCFOutboundEmail class	91
Text property: MCFOutboundEmail class	91
TimeToWaitForResult property: MCFOutboundEmail class	91
UsedDefaultConfig property: MCFOutboundEmail class	91
UsedPrimaryServer property: MCFOutboundEmail class	92
ValidSentAddresses property: MCFOutboundEmail class	92
ValidUnsentAddresses property: MCFOutboundEmail class	92
SMTPSession Class	92
SMTPSession Class Methods	92

Send method: SMTPSession class	93
SendAll method: SMTPSession class	93
SetSMTPParam method: SMTPSession class	94
SMTPSession Class Properties	95
BackupPort property: SMTPSession class	95
BackupServer property: SMTPSession class	95
BackupSSLClientCertAlias property: SMTPSession class	95
BackupSSLPort property: SMTPSession class	95
BackupUserName property: SMTPSession class	96
BackupUserPassword property: SMTPSession class	96
BackupUseSSL property: SMTPSession class	96
IsAuthenticationReqd property: SMTPSession class	96
Port property: SMTPSession class	96
Server property: SMTPSession class	97
SSLClientCertAlias property: SMTPSession class	97
SSLPort property: SMTPSession class	97
UsedDefaultConfig property: SMTPSession class	98
UsedPrimaryServer property: SMTPSession class	98
UserName property: SMTPSession class	98
UserPassword property: SMTPSession class	98
UseSSL property: SMTPSession class	99
Mail Classes Examples	99
Creating a Text Email	99
Creating Email and Overriding SMTP Settings	100
Creating an HTML Email	101
Creating a Multipart Email with Text and HTML Parts	102
Creating an HTML Email with Images	103
Creating an Email from Rich Text Editor Output	104
Creating an Email with Attachments	110
Creating Email Attachments by Specifying URLs	112
Creating and Sending Multiple Email Messages	113
Sending an Email With Authentication	113
Using an SSL Connection to Send Email	114

34 Managed Object Classes

Understanding the Managed Object Classes	1
Considerations When Using Definitions Created Through the Managed Object Classes	1
Managed Object Classes Built-in Functions	3
FieldDefn Class	3
FieldDefn Class Methods	4
Save method: FieldDefn class	4

SaveAs method: FieldDefn class	5
SetLabel method: FieldDefn class	6
SetTranslateValue method: FieldDefn class	7
Validate method: FieldDefn class	8
FieldDefn Class Properties	8
DecimalPositions property: FieldDefn class	9
DefaultCentury property: FieldDefn class	9
Description property: FieldDefn class	9
FormatType property: FieldDefn class	9
IntegerPositions property: FieldDefn class	10
Length property: FieldDefn class	10
MaximumLength property: FieldDefn class	11
Messages property: FieldDefn class	11
Name property: FieldDefn class	12
ObjectOwnerId property: FieldDefn class	12
RawBinary property: FieldDefn class	12
RuntimeDefn property: FieldDefn class	12
TimeFormat property: FieldDefn class	13
Type property: FieldDefn class	13
RecordDefn Class	14
RecordDefn Class Methods	14
AddField method: RecordDefn class	14
AddSubRecord method: RecordDefn class	15
Build method: RecordDefn class	16
GetField method: RecordDefn class	17
RemoveField method: RecordDefn class	17
RemoveSubRecord method: RecordDefn class	18
Save method: RecordDefn class	19
SaveAsView method: RecordDefn class	20
Validate method: RecordDefn class	21
RecordDefn Class Properties	21
BuildSequenceNumber property: RecordDefn class	21
Description property: RecordDefn class	21
FieldCount property: RecordDefn class	22
Messages property: RecordDefn class	22
Name property: RecordDefn class	22
ObjectOwnerId property: RecordDefn class	23
QuerySecurityRecord property: RecordDefn class	23
RelatedLanguageRecord property: RecordDefn class	23
RuntimeDefn property: RecordDefn class	23
SetControlField property: RecordDefn class	23
SQL property: RecordDefn class	24

Type property: RecordDefn class	24
RecordFieldDefn Class	24
RecordFieldDefn Class Methods	25
RecordFieldDefn Class Properties	25
AllowSearchEventsForPromptDialogs property: RecordFieldDefn class	25
AlternateSearchKey property: RecordFieldDefn class	25
DescendingKey property: RecordFieldDefn class	25
DuplicateOrderKey property: RecordFieldDefn class	26
Key property: RecordFieldDefn class	26
ListBoxItem property: RecordFieldDefn class	26
Name property: RecordFieldDefn class	27
Number property: RecordFieldDefn class	27
RecordFieldLabelID property: RecordFieldDefn class	27
Required property: RecordFieldDefn class	27
SearchEdit property: RecordFieldDefn class	27
SearchKey property: RecordFieldDefn class	28
TableEditPromptTable property: RecordFieldDefn class	28
TableEditSetControlField property: RecordFieldDefn class	28
TableEditType property: RecordFieldDefn class	29
Type property: RecordFieldDefn class	29
Message Catalog Component Interface	30
Message Catalog Methods	30
AddMessage	30
DeleteMessage	31
Message Catalog Properties	32
DESCR (Message Set)	32
DESCRSHORT (Message Set)	32
MESSAGE_SET_NBR (Message Set)	33
DESCRLONG (Message Catalog Entry)	33
MESSAGE_NBR (Message Catalog Entry)	33
MESSAGE_SET_NBR (Message Catalog Entry)	33
MESSAGE_TEXT (Message Catalog Entry)	33
MSG_SEVERITY (Message Catalog Entry)	34

35 MCF IM Classes

MCFIMInfo Class Methods	1
AddUser method: MCFIMInfor class	1
CheckAll method: MCFIMInfor class	1
GetAdditionalUserInfo method: MCFIMInfor class	1
GetErrorImageName method: MCFIMInfor class	2
GetOffLineImageName method: MCFIMInfor class	2

GetOnInImageName method: MCFIMInfor class	2
GetUnknownImageName method: MCFIMInfor class	2
GetLaunchURL method: MCFIMInfor class	2
GetStatus method: MCFIMInfor class	3
RemoveUser method: MCFIMInfor class	3
MCFIMSingleButton Class Methods	3
generateHTML method: MCFIMSingleButton class	3
generateJavaScript method: MCFIMSingleButton class	3
insertXMPPServerUserData method: MCFIMSingleButton class	4
MCFIMSingleButton method: MCFIMSingleButton class	4
updateXMPPServerUserData method: MCFIMSingleButton class	4
MCFIMSingleButton Class Properties	4
hideDelay property: MCFIMSingleButton class	4

36 Message Classes

Understanding Message Classes	1
Messages, Service Operations and Handlers	1
Integration Broker Application Classes	2
Data Types of Message Objects	2
Scope of Message Objects	3
Message Object Population	3
Considerations When Populating a Rowset From a Message	4
Considerations for Publishing and Subscribing to Partial Records	6
Considerations When Subscribing to Character Fields	6
Message Segments	6
Content-Based Routing	9
Error Handling	11
Message Classes Reference	12
Message Class Built-In Functions	12
Message Class Methods	12
Clone method: Message class	12
CopyPartRowset method: Message class	13
CopyRowset method: Message class	14
CopyRowsetDelta method: Message class	16
CopyRowsetDeltaOriginal method: Message class	18
CreateNextSegment method: Message class	21
DeleteSegment method: Message class	22
ExecuteEdits method: Message class	23
FirstCorrelation method: Message class	25
GenXMLPartString method: Message class	26
GenXMLString method: Message class	27

GetContentString method: Message class	27
GetDocument method: Message class	28
GetJsonObject method: Message class	29
GetPartAliasName method: Message class	30
GetPartName method: Message class	30
GetPartRowset method: Message class	31
GetPartVersion method: Message class	32
GetPartXMLDoc method: Message class	32
GetQueryString method: Message class	33
GetRowset method: Message class	34
GetSegment method: Message class	35
GetURIDocument method: Message class	35
GetURIResource method: Message class	36
GetXmlDoc method: Message class	37
InBoundPublish method: Message class	37
LoadXMLPartString method: Message class	38
LoadXMLString method: Message class	39
OverrideRESTBaseUrl method: Message class	40
OverrideURIResource method: Message class	40
Publish method: Message class	41
SegmentRestart method: Message class	43
SetContentString method: Message class	43
SetEditTable method: Message class	45
SetJsonObject method: Message class	46
SetQueryString method: Message class	47
SetRESTCache method: Message class	48
SetStatus method: Message class	48
SetXmlDoc method: Message class	50
SyncRequest method: Message class	50
Update method: Message class	52
UpdateSegment method: Message class	53
Message Class Properties	53
ActionName property: Message class	54
AliasName property: Message class	54
ChannelName property: Message class	54
Cookies property: Message class	55
CurrentSegment property: Message class	56
DefaultMessageVersion property: Message class	56
DoNotPubToNodeName property: Message class	56
GUID property: Message class	57
HTTPMethod property: Message class	57
HTTPResponseCode property: Message class	58

IBException property: Message class	58
IBInfo property: Message class	59
InitializeConversationId property: Message class	59
IsActive property: Message class	59
IsBulkLoadTruncation property: Message class	60
IsDelta property: Message class	60
IsEditError property: Message class	61
IsLocal property: Message class	62
IsOperationActive property: Message class	62
IsParts property: Message class	62
IsPartsStructured property: Message class	63
IsRequest property: Message class	63
IsSourceNodeExternal property: Message class	63
IsStructure property: Message class	64
MessageDetail property: Message class	64
Name property: Message class	64
NRId property: Message class	64
OperationName property: Message class	64
OperationVersion property: Message class	65
ParentTransactionId property: Message class	65
PartCount property: Message class	65
PubID property: Message class	65
PubNodeName property: Message class	66
QueueName property: Message class	66
QueueSeqId property: Message class	66
ResponseStatus property: Message class	67
ReUseTransactionId property: Message class	67
SegmentContentTransfer property: Message class	67
SegmentContentType property: Message class	68
SegmentCount property: Message class	69
SegmentsByDatabase property: Message class	69
Size property: Message class	69
SubName property: Message class	70
SubQueueName property: Message class	71
SubscriptionProcessId property: Message class	71
TransactionId property: Message class	72
URIResourceIndex property: Message class	72
Version property: Message class	72
IntBroker Class	73
IntBroker Class Methods	73
Cancel method: IntBroker class	73
ConnectorRequest method: IntBroker class	74

ConnectorRequestUrl method: IntBroker class	75
DefaultLocalNode method: IntBroker class	76
DefaultPortalName method: IntBroker class	77
DeleteLayoutCache method: IntBroker class	77
DeleteOrphanedSegments method: IntBroker class	78
DeleteRESTCache method: IntBroker class	79
EscapeControlCodes method: IntBroker class	79
GenLayoutDoc method: IntBroker class	80
GenLayoutHTML method: IntBroker class	81
GetArchData method: IntBroker class	82
GetArchIBInfoData method: IntBroker class	83
GetContentURI method: IntBroker class	83
GetDocSchema method: IntBroker class	84
GetIBInfoData method: IntBroker class	84
GetIBTransactionIDforAE method: IntBroker class	85
GetImageUrl method: IntBroker class	86
GetMessage method: IntBroker class	86
GetMessageErrors method: IntBroker class	87
GetMsgSchema method: IntBroker class	88
GetPortalURI method: IntBroker class	88
GetSyncIBInfoData method: IntBroker class	89
GetSyncLogData method: IntBroker class	90
GetURL method: IntBroker class	91
InBoundPublish method: IntBroker class	93
IsOperationActive method: IntBroker class	93
MAPLogout method: IntBroker class	94
MAPSessionTimeout method: IntBroker class	94
MAPTimeout method: IntBroker class	95
MsgSchemaExists method: IntBroker class	95
Publish method: IntBroker class	96
Resubmit method: IntBroker class	97
SetMessageError method: IntBroker class	98
SetStatus method: IntBroker class	99
SwitchAsyncEventUserContext method: IntBroker class	100
SyncRequest method: IntBroker class	101
Update method: IntBroker class	103
UpdateCSSMetadata method: IntBroker class	103
UpdateDocument method: IntBroker class	104
UpdateJSMetadata method: IntBroker class	104
UpdateXmlDoc method: IntBroker class	105
IBInfo Class	106
IBInfo Class Methods	106

AddAEAttribute method: IBInfo class	106
AddAttachment method: IBInfo class	107
AddAttribute method: IBInfo class	108
AddContainerAttribute method: IBInfo class	109
ClearAEAttributes method: IBInfo class	110
ClearAttachments method: IBInfo class	111
ClearAttributes method: IBInfo class	111
ClearContainerAttributes method: IBInfo class	112
DeleteAEAttribute method: IBInfo class	112
DeleteAttachment method: IBInfo class	113
DeleteAttribute method: IBInfo class	113
DeleteContainerAttribute method: IBInfo class	114
GetAEAttributeName method: IBInfo class	115
GetAEAttributeValue method: IBInfo class	115
GetAttachmentContentID method: IBInfo class	116
GetAttachmentProperty method: IBInfo class	116
GetAttributeName method: IBInfo class	118
GetAttributeValue method: IBInfo class	119
GetContainerAttributeName method: IBInfo class	120
GetContainerAttributeValue method: IBInfo class	121
GetNumberOfAEAttributes method: IBInfo class	121
GetNumberOfAttributes method: IBInfo class	122
GetNumberOfContainerAttributes method: IBInfo class	122
GetTransactionIDforAE method: IBInfo class	123
InsertAEResponseAttributes method: IBInfo class	124
LoadConnectorProp method: IBInfo class	124
LoadConnectorPropFromNode method: IBInfo class	125
LoadConnectorPropFromRouting method: IBInfo class	126
LoadConnectorPropFromTrx method: IBInfo class	126
LoadRESTHeaders method: IBInfo class	126
SetAttachmentProperty method: IBInfo class	128
IBInfo Class Properties	129
AppServerDomain property: IBInfo class	130
CompressionOverride property: IBInfo class	130
ConnectorOverride property: IBInfo class	131
ConversationID property: IBInfo class	131
DeliveryMode property: IBInfo class	131
DestinationNode property: IBInfo class	132
ExternalMessageID property: IBInfo class	132
ExternalOperationName property: IBInfo class	132
ExternalUserName property: IBInfo class	132
ExternalUserPassword property: IBInfo class	132

FinalDestinationNode property: IBInfo class	133
FuturePublicationDateTime property: IBInfo class	133
HTTPSessionId property: IBInfo class	133
IBConnectorInfo property: IBInfo class	133
InReplyToId property: IBInfo class	133
MessageChannel property: IBInfo class	133
MessageName property: IBInfo class	134
MessageQueue property: IBInfo class	134
MessageType property: IBInfo class	134
MessageVersion property: IBInfo class	135
NodeDN property: IBInfo class	135
NonRepudiationID property: IBInfo class	135
NumberOfAttachments property: IBInfo class	135
OperationType property: IBInfo class	136
OperationVersion property: IBInfo class	136
OrigNode property: IBInfo class	136
OrigProcess property: IBInfo class	136
OrigTimeStamp property: IBInfo class	136
OrigUser property: IBInfo class	137
PublicationID property: IBInfo class	137
RequestingNodeName property: IBInfo class	137
RequestingNodeDescription property: IBInfo class	137
ResponseAsAttachment property: IBInfo class	137
SegmentsUnOrder property: IBInfo class	137
SourceNode property: IBInfo class	138
SyncServiceTimeout property: IBInfo class	138
TransactionID property: IBInfo class	139
UserName property: IBInfo class	139
VisitedNodes property: IBInfo class	139
WSA_Action property: IBInfo class	139
WSA_FaultTo property: IBInfo class	139
WSA_MessageID property: IBInfo class	140
WSA_ReplyTo property: IBInfo class	140
WSA_To property: IBInfo class	140
IBConnectorInfo Collection	140
IBConnectorInfo Collection Methods	140
AddConnectorProperties method: ConnectorInfo collection	140
AddQueryStringArg method: ConnectorInfo collection	141
ClearConnectorProperties method: ConnectorInfo collection	142
ClearQueryStringArgs method: ConnectorInfo collection	142
DeleteConnectorProperties method: ConnectorInfo collection	143
DeleteQueryStringArg method: ConnectorInfo collection	143

GetConnectorPropertiesName method: ConnectorInfo collection	144
GetConnectorPropertiesType method: ConnectorInfo collection	144
GetConnectorPropertiesValue method: ConnectorInfo collection	145
GetNumberOfConnectorProperties method: ConnectorInfo collection	145
GetNumberOfQueryStringArgs method: ConnectorInfo collection	146
GetQueryStringArgName method: ConnectorInfo collection	146
GetQueryStringArgValue method: ConnectorInfo collection	146
IBConnectorInfo Collection Properties	147
ConnectorClassName property: ConnectorInfo collection	147
ConnectorName property: ConnectorInfo collection	147
Cookies property: ConnectorInfo collection	147
PathInfo property: ConnectorInfo collection	148
RemoteFrameworkURL property: ConnectorInfo collection	148

37 Optimization PeopleCode

Using Optimization PeopleCode on the Application Server	1
Using Optimization PeopleCode in an Application Engine Program	1
Performing Optimization in PeopleCode	2
Creating New Analytic Instances	2
Loading Analytic Instances Into an Analytic Server	3
Running Optimization Transactions	4
Invoking the Optimization PeopleCode Plug-In	5
Shutting Down Optimization Engines	5
Deleting Existing Analytic Instances	6
Programming for Database Updates	6
Using Lights-Out Mode with Optimization	7
Understanding Lights-out Mode	7
Creating a Request Message	9
Creating a Response Message	12
Editing the Request PeopleCode	13
Editing the Response PeopleCode	17
Optimization Built-in Functions	19
CreateOptEngine function	19
CreateOptInterface function	21
DeleteOptProblnst function	22
GetOptEngine function	23
GetOptProblnstList function	24
InsertOptProblnst function	26
IsValidOptProblnst function	27
OptEngine Class Methods	28
CheckOptEngineStatus method: OptEngine class	28

FillRowset method: OptEngine class	30
GetDate method: OptEngine class	32
GetDateArray method: OptEngine class	33
GetDateTime method: OptEngine class	33
GetDateTimeArray method: OptEngine class	34
GetNumber method: OptEngine class	35
GetNumberArray method: OptEngine class	36
GetString method: OptEngine class	37
GetStringArray method: OptEngine class	38
GetTime method: OptEngine class	39
GetTimeArray method: OptEngine class	40
GetTraceLevel method: OptEngine class	41
RunAsynch method: OptEngine class	42
RunSynch method: OptEngine class	43
SetTraceLevel method: OptEngine class	45
ShutDown method: OptEngine class	47
OptEngine Class Properties	48
DetailMsgs property: OptEngine class	48
DetailedStatus property: OptEngine class	49
OptBase Application Class	50
OptBase Class Methods	51
GetParmDate method: OptBase class	51
GetParmDateArray method: OptBase class	52
GetParmDateTime method: OptBase class	52
GetParmDateTimeArray method: OptBase class	53
GetParmNumber method: OptBase class	53
GetParmNumberArray method: OptBase class	54
GetParmInt method: OptBase class	54
GetParmIntArray method: OptBase class	55
GetParmString method: OptBase class	55
GetParmStringArray method: OptBase class	56
GetParmTime method: OptBase class	56
GetParmTimeArray method: OptBase class	57
Init method: OptBase class	57
OptDeleteCallback method: OptBase class	58
OptInsertCallback method: OptBase class	59
OptPostUpdateCallback method: OptBase class	60
OptPreUpdateCallback method: OptBase class	60
OptRefreshCallback method: OptBase class	61
SetOutputParmDate method: OptBase class	62
SetOutputParmDateArray method: OptBase class	62
SetOutputParmDateTime method: OptBase class	63

SetOutputParmDateTimeArray method: OptBase class	63
SetOutputParmNumber method: OptBase class	64
SetOutputParmNumberArray method: OptBase class	65
SetOutputParmInt method: OptBase class	65
SetOutputParmIntArray method: OptBase class	66
SetOutputParmString method: OptBase class	66
SetOutputParmStringArray method: OptBase class	67
SetOutputParmTime method: OptBase class	67
SetOutputParmTimeArray method: OptBase class	68
OptInterface Class Methods	68
ActivateModel method: OptInterface class	69
ActivateObjective method: OptInterface class	70
DeactivateModel method: OptInterface class	70
DumpMsgToLog method: OptInterface class	71
FindRowNum method: OptInterface class	71
GetSolution method: OptInterface class	73
GetSolutionDetail method: OptInterface class	74
IsModelActive method: OptInterface class	75
RestoreBounds method: OptInterface class	76
SetVariableBounds method: OptInterface class	77
SetVariableType method: OptInterface class	78
Solve method: OptInterface class	79

38 Page Class

Understanding Page Class	1
Shortcut Considerations	1
Data Type of a Page Object	1
Scope of a Page Object	2
Page Class Built-in Function	2
Page Class Properties	2
CopyURLLink property: Page class	2
CustomizePageLink property: Page class	2
DisplayOnly property: Page class	3
HelpLink property: Page class	3
Name property: Page class	4
NewWindowLink property: Page class	4
Visible property: Page class	4

39 PeopleSoft Search Framework Classes

Understanding the PeopleSoft Search Framework Classes	1
Instantiating a SearchQuery Object	1
Importing PeopleSoft Search Framework Classes	2
Performing a Simple Search	2
PeopleSoft Search Framework Classes Reference	4
PeopleSoft Search Framework Classes Built-in Functions	5
AddConfiguration Class	5
AddConfiguration Class Methods	5
AddConfiguration method: AddConfiguration class	5
GetAddPageInstructionsInfo method: AddConfiguration class	6
GetAddPageTitleInfo method: AddConfiguration class	6
GetAddSearchRecord method: AddConfiguration class	7
GetConfiguredAppClass method: AddConfiguration class	7
GetConfiguredAppClassMethod method: AddConfiguration class	7
GetConfiguredApppackage method: AddConfiguration class	8
GetConfiguredClassPath method: AddConfiguration class	8
GetCriteriaFields method: AddConfiguration class	9
GetPageLinksList method: AddConfiguration class	9
AssociatedFacet Class	10
AssociatedFacet Class Methods	10
getAssociatedFacetValue method: AssociatedFacet class	10
DashboardFilters Class	10
DashboardFilters Class Methods	11
GetDashboardFilter	11
FacetFilter Class	12
FacetFilter Class Methods	12
clearFacetSorting method: FacetFilter class	12
FacetFilter method: FacetFilter class	13
getFacetSortings method: FacetFilter class	14
getFacetValuesSortType method: FacetFilter class	14
hasCustomFacetSorting method: FacetFilter class	15
sortFacetValuesAlphabetically method: FacetFilter class	15
sortFacetValuesByDocumentCount method: FacetFilter class	16
sortFacetValuesByType method: FacetFilter class	16
sortFacetValuesNumerically method: FacetFilter class	17
FacetFilter Class Properties	17
AssociationValue property: FacetFilter class	18
FacetLabel property: FacetFilter class	18
FacetName property: FacetFilter class	18
Path property: FacetFilter class	18

FacetNode Class	18
FacetNode Class Methods	19
addChild method: FacetNode class	19
FacetNode method: FacetNode class	19
getChildNodes method: FacetNode class	20
FacetNode Class Properties	20
DisplayValue property: FacetNode class	20
DocumentCount property: FacetNode class	21
FacetValue property: FacetNode class	21
HasChildren property: FacetNode class	21
FilterValues Class	21
FilterValues Class Methods	22
DynamicTimeRangeAbsolute method: FilterValues class	22
DynamicTimeRangeRelative method: FilterValues class	22
Equals method: FilterValues class	23
EqualsDateTime method: FilterValues class	24
Exists method: FilterValues class	24
FilterValues method: FilterValues class	25
InBetweenDateTime method: FilterValues class	25
InBetweenNumeric method: FilterValues class	26
Key method: FilterValues class	27
NotEquals method: FilterValues class	27
NotEqualsDateTime method: FilterValues class	28
NotExists method: FilterValues class	29
NotInBetweenDateTime method: FilterValues class	29
NotInBetweenNumeric method: FilterValues class	30
Value method: FilterValues class	31
Values method: FilterValues class	31
IndexFilter Class	32
IndexFilter Class Methods	32
getAGFilterSQLText method: IndexFilter Class	32
OverrideConfiguredValues Class	33
PTRTI Class	35
PTRTI Class Methods	35
PostProcess method: PTRTI class	35
Process method: PTRTI class	36
SearchAttribute Class	37
SearchAttribute Class Methods	38
SearchAttribute method: SearchAttribute class	38
SearchAttribute Class Properties	38
Display property: SearchAttribute class	39
Name property: SearchAttribute class	39

Type property: SearchAttribute class	39
SearchbarContext Class	39
SearchbarContext Class Methods	39
SearchbarContext method: SearchbarContext class	40
SearchbarContext Class Properties	40
ArrCustomSearchCategory property: SearchbarContext class	40
CustomSearchCategory property: SearchbarContext class	40
IsComponentOrGenericURL property: SearchbarContext class	41
IsIncludeHiddenCref property: SearchbarContext class	41
Placeholder property: SearchbarContext class	41
ShowCategoryDropDown property: SearchbarContext class	41
ShowGlobalSearchButton property: SearchbarContext class	41
ShowGridIcons property: SearchbarContext class	42
SearchCategory Class	42
SearchCategory Class Methods	42
GetAllAttributes method: SearchCategory class	42
GetConfiguredFilterAttributes method: SearchCategory class	43
GetFacetFilters method: SearchCategory class	43
GetLastIndexedDateTime method: SearchCategory class	44
GetNonConfiguredFilterAttributes method: SearchCategory class	44
GetRequestedAttributes method: SearchCategory class	44
GetRequestedFields method: SearchCategory class	45
SearchCategory method: SearchCategory class	46
SearchCategory Class Properties	46
DataSourceNames property: SearchCategory class	47
Displayname property: SearchCategory class	47
Duplicates property: SearchCategory class	47
IsDeployed property: SearchCategory class	47
Name property: SearchCategory class	48
ServiceName property: SearchCategory class	48
SearchConfiguration Class	48
SearchConfiguration Class Methods	48
CollapseSearchCriteriaAfterSrch method: SearchConfiguration class	49
GetConfigSrchId method: SearchConfiguration class	49
GetConfiguredImageRecord method: SearchConfiguration class	50
GetConfiguredImageRecordField method: SearchConfiguration class	50
GetConfiguredSearchType method: SearchConfiguration class	51
GetCriteriaFields method: SearchConfiguration class	51
GetDefaultSrchLookup method: SearchConfiguration class	52
GetDefaultSrchLookupForSFF method: SearchConfiguration class	53
GetESCriteriaFields method: SearchConfiguration class	53
GetMaxSrchResults method: SearchConfiguration class	53

GetPageLinksList method: SearchConfiguration class	54
GetRecentSearchesCount method: SearchConfiguration class	54
GetRecentSearchesNamingFormat method: SearchConfiguration class	55
GetResultFields method: SearchConfiguration class	55
GetSavedSearchesCount method: SearchConfiguration class	56
GetSavedSearchesNamingFormat method: SearchConfiguration class	56
GetSearchCriteriaDisplayPattern method: SearchConfiguration class	56
GetSearchDefinition method: SearchConfiguration class	57
GetSearchPageInstructionsInfo method: SearchConfiguration class	57
GetSearchPageTitleInfo method: SearchConfiguration class	58
GetSearchRecord method: SearchConfiguration class	58
GetSrchLookupType method: SearchConfiguration class	59
IsAutoSearchEnabled method: SearchConfiguration class	59
IsSearchPrimaryAction method: SearchConfiguration class	59
SearchConfiguration method: SearchConfiguration class	60
ShowRelatedActions method: SearchConfiguration class	60
SearchFactory Class	61
SearchFactory Class Methods	61
CreateQueryService method: SearchFactory class	61
SearchFactory method: SearchFactory class	62
SearchFactory Class Properties	62
DEFAULTSERVICE property: SearchFactory class	62
SearchField Class	62
SearchField Class Methods	63
getAsDate method: SearchField class	63
getAsDateTime method: SearchField class	63
getAsInteger method: SearchField class	64
getAsNumber method: SearchField class	64
SearchField Class Properties	65
Name property: SearchField class	65
Type property: SearchField class	65
Value property: SearchField class	65
SearchFieldCollection Class	66
SearchFieldCollection Class Methods	66
Count method: SearchFieldCollection collection	66
First method: SearchFieldCollection collection	66
Item method: SearchFieldCollection collection	67
ItemByName method: SearchFieldCollection collection	67
Next method: SearchFieldCollection collection	68
SearchFilter Class	69
SearchFilter Class Methods	69
setDateFilter method: SearchFilter class	69

setDateTimeFilter method: SearchFilter class	70
setFilterArray method: SearchFilter class	70
SearchFilter Class Properties	71
Field property: SearchFilter class	71
FilterConnector property: SearchFilter class	72
Filters property: SearchFilter class	72
Operator property: SearchFilter class	72
Value property: SearchFilter class	73
SearchFilterGenerator Class	73
Related SearchFilterGenerator Methods	73
SearchFilterGenerator Class Methods	75
AddQueryFilter method: SearchFilterGenerator class	75
AfterDate method: SearchFilterGenerator class	75
AfterDateTime method: SearchFilterGenerator class	76
AfterDateValue method: SearchFilterGenerator class	77
AppendFilter method: SearchFilterGenerator class	77
BeforeDate method: SearchFilterGenerator class	78
BeforeDateTime method: SearchFilterGenerator class	79
BeforeDateValue method: SearchFilterGenerator class	79
BoostCompositeFilterScore method: SearchFilterGenerator class	80
BoostFilterScore method: SearchFilterGenerator class	81
ContainsKeyWords method: SearchFilterGenerator class	82
ContainsPartialWord method: SearchFilterGenerator class	83
ContainsPhrase method: SearchFilterGenerator class	83
ContainsWord method: SearchFilterGenerator class	84
DateToDatetime method: SearchFilterGenerator class	85
EndMatchAll method: SearchFilterGenerator class	85
EndMatchAny method: SearchFilterGenerator class	86
EqualsDate method: SearchFilterGenerator class	86
EqualsDateTime method: SearchFilterGenerator class	87
EqualsDateValue method: SearchFilterGenerator class	87
EqualsNumber method: SearchFilterGenerator class	88
EqualsString method: SearchFilterGenerator class	88
GetFilter method: SearchFilterGenerator class	89
GreaterThanEqualsNumber method: SearchFilterGenerator class	90
GreaterThanNumber method: SearchFilterGenerator class	90
LessThanEqualsNumber method: SearchFilterGenerator class	91
LessThanNumber method: SearchFilterGenerator class	91
MatchAll method: SearchFilterGenerator class	92
MatchAllReturnTrue method: SearchFilterGenerator class	92
MatchAny method: SearchFilterGenerator class	93
MatchAnyReturnTrue method: SearchFilterGenerator class	93

NotContainsWord method: SearchFilterGenerator class	94
NotEqualsDate method: SearchFilterGenerator class	95
NotEqualsDateTime method: SearchFilterGenerator class	96
NotEqualsDateValue method: SearchFilterGenerator class	96
NotEqualsNumber method: SearchFilterGenerator class	97
NotEqualsString method: SearchFilterGenerator class	97
OnOrAfterDate method: SearchFilterGenerator class	98
OnOrAfterDateTime method: SearchFilterGenerator class	99
OnOrAfterDateValue method: SearchFilterGenerator class	99
OnOrBeforeDate method: SearchFilterGenerator class	100
OnOrBeforeDateTime method: SearchFilterGenerator class	100
OnOrBeforeDateValue method: SearchFilterGenerator class	101
SearchFilterGenerator method: SearchFilterGenerator class	101
setBoostMode method: SearchFilterGenerator class	102
setBoostModeAverage method: SearchFilterGenerator class	103
setBoostModeFirst method: SearchFilterGenerator class	104
setBoostModeMaximum method: SearchFilterGenerator class	104
setBoostModeMinimum method: SearchFilterGenerator class	104
setBoostModeMultiply method: SearchFilterGenerator class	105
setBoostModeSum method: SearchFilterGenerator class	105
SetQueryFilter method: SearchFilterGenerator class	106
setQueryScoreBoostAverage method: SearchFilterGenerator class	107
setQueryScoreBoostMaximum method: SearchFilterGenerator class	107
setQueryScoreBoostMinimum method: SearchFilterGenerator class	107
setQueryScoreBoostMultiply method: SearchFilterGenerator class	108
setQueryScoreBoostReplace method: SearchFilterGenerator class	108
setQueryScoreBoostSum method: SearchFilterGenerator class	108
StringDateToDatetime method: SearchFilterGenerator class	109
SearchFilterGenerator Class Properties	109
BoostWithoutFilter property: SearchFilterGenerator class	110
Search Filter Generator Examples	110
Creating Complex Filters	111
Score Boosting Examples	113
SearchQuery Class	118
SearchQuery Class Methods	118
BrowseFacetNodes method: SearchQuery class	118
Execute method: SearchQuery class	119
FormatDateFilter method: SearchQuery class	121
FormatDateTimeFilter method: SearchQuery class	122
SearchQuery Class Properties	122
Categories property: SearchQuery class	122
ContainsAnyWords property: SearchQuery class	123

ContainsExactPhrase property: SearchQuery class	123
ClusteringSpecs property: SearchQuery class	123
DisableScoreSort property: SearchQuery class	123
DocsRequested property: SearchQuery class	124
EnableExtendedFilterOperators property: SearchQuery class	125
FacetFilters property: SearchQuery class	125
FilterConnector property: SearchQuery class	125
Filters property: SearchQuery class	126
GroupingSpec property: SearchQuery class	126
IncludelImages property: SearchQuery class	126
Language property: SearchQuery class	126
MarkDuplicates property: SearchQuery class	127
MaximumNumberOfFacetValues property: SearchQuery class	127
MinimumDocumentsPerFacetValue property: SearchQuery class	127
ProgrammaticSearchString property: SearchQuery class	128
QueryText property: SearchQuery class	128
RemoveDuplicates property: SearchQuery class	128
RequestedFields property: SearchQuery class	129
ReturnFacetValueCounts property: SearchQuery class	129
SearchOnlyInAttachments property: SearchQuery class	129
SearchWithin property: SearchQuery class	129
SortFacetValuesBy property: SearchQuery class	130
SortSpecs property: SearchQuery class	130
StartIndex property: SearchQuery class	130
TopN property: SearchQuery class	130
WithoutWords property: SearchQuery class	131
SearchQueryCollection Class	131
SearchQueryCollection Class Methods	131
addQuery method: SearchQueryCollection collection	131
Count method: SearchQueryCollection collection	132
ExecuteQuery method: SearchQueryCollection collection	132
First method: SearchQueryCollection collection	133
Item method: SearchQueryCollection collection	133
Next method: SearchQueryCollection collection	134
SearchQueryService Class	134
SearchQueryService Class Methods	134
CreateQuery method: SearchQueryService class	134
CreateQueryCollection method: SearchQueryService class	135
ExecuteQuery method: SearchQueryService class	136
ExecuteQuery method: SearchQueryService class	136
SearchResult Class	137
SearchResult Class Methods	138

GetCategoryNames method: SearchResult class	138
GetContentLength method: SearchResult class	138
GetCustomAttributes method: SearchResult class	139
GetImageUrl method: SearchResult class	139
GetLanguage method: SearchResult class	140
GetLastModified method: SearchResult class	140
GetScore method: SearchResult class	141
GetSignature method: SearchResult class	141
GetSummary method: SearchResult class	141
GetTitle method: SearchResult class	142
GetUrlLink method: SearchResult class	142
HasDuplicate method: SearchResult class	142
IsDuplicate method: SearchResult class	143
SearchResultCollection Class	144
SearchResultCollection Class Methods	144
First method: SearchResultCollection collection	144
GetDocumentCount method: SearchResultCollection collection	144
GetDuplicatesMarked method: SearchResultCollection collection	145
GetDuplicatesRemoved method: SearchResultCollection collection	145
GetEstimatedHitCount method: SearchResultCollection collection	146
GetFacetNodes method: SearchResultCollection collection	147
GetQueryObject method: SearchResultCollection collection	147
GetQueryText method: SearchResultCollection collection	147
GetStartIndex method: SearchResultCollection collection	148
Item method: SearchResultCollection collection	148
Next method: SearchResultCollection collection	149
SearchAuthnQueryFilter Class	149
SearchAuthnQueryFilter Class Methods	150
evaluateAttrValues method: SearchAuthnQueryFilter class	150
Additional Search Examples	151
Searching Using Facets	151

40 Portal Registry Classes

Understanding the Portal Registry	1
Folders	1
Content References	2
Nodes	2
Security	3
Attributes	3
Additional Portal Objects	4
Using the Portal Registry API	4

Using Security	4
Portal Registry Object Properties	4
Accessing Portal Registry Objects	5
Using PermissionValue, RolePermissionValue, Cascading Permissions and CascadingRolePermissions	5
Working With ValidFrom and ValidTo	8
Doing Error Handling	8
Understanding the Life Cycle of a PortalRegistry Object	9
Using Content References	11
UsageType	12
TemplateType	13
URLType	13
Nodes and URL	14
Naming Conventions	15
Deleting Content Considerations	15
Saving Content Considerations	16
Data Type of a PortalRegistry Object	16
Scope of a PortalRegistry Object	17
PortalRegistry Reference	17
Session Class Methods	17
FindPortalRegistries method: Session class	18
GetActualRemoteNodes method: Session class	18
GetLocalNode method: Session class	19
GetNodes method: Session class	20
GetPortalRegistry method: Session class	20
GetRemoteNodes method: Session class	21
PortalRegistry Class	21
PortalRegistry Class Methods	22
Close method: PortalRegistry class	22
CopyObject method: PortalRegistry class	23
Create method: PortalRegistry class	24
CreateContentRefLink method: PortalRegistry class	25
CreateRemote method: PortalRegistry class	26
Delete method: PortalRegistry class	27
DeleteHomepage method: PortalRegistry class	28
FindCRefByName method: PortalRegistry class	28
FindCRefByURL method: PortalRegistry class	29
FindCRefForURL method: PortalRegistry class	30
FindCRefLinkByName method: PortalRegistry class	32
FindFolderByName method: PortalRegistry class	32
FindPgltByName method: PortalRegistry class	33
GetAbsoluteContentURL method: PortalRegistry class	34

GetDefaultHPTabOID method: PortalRegistry class	35
GetQualifiedURL method: PortalRegistry class	35
GrantPermissionForComponent method: PortalRegistry class	36
GrantPermissionForScript method: PortalRegistry class	37
Open method: PortalRegistry class	38
PermissionListDelete method: PortalRegistry class	39
PermissionListSaveAs method: PortalRegistry class	39
RevokePermissionForComponent method: PortalRegistry class	40
RevokePermissionForScript method: PortalRegistry class	41
Save method: PortalRegistry class	42
PortalRegistry Class Properties	43
DefaultTemplate property: PortalRegistry class	43
Description property: PortalRegistry class	43
Favorites property: PortalRegistry class	44
FolderNavObject property: PortalRegistry class	44
Homepage property: PortalRegistry class	44
IsFolderNavigation property: PortalRegistry class	44
LandingPage property: PortalRegistry class	45
LandingTabDefinitions property: PortalRegistry class	45
Name property: PortalRegistry class	45
NodeTemplates property: PortalRegistry class	46
OwnerId property: PortalRegistry class	46
PageletCategories property: PortalRegistry class	46
Portals property: PortalRegistry class	46
RootFolder property: PortalRegistry class	46
SectionTemplates property: PortalRegistry class	47
TabDefinitions property: PortalRegistry class	47
TemplateObject property: PortalRegistry class	47
PortalRegistry Collection	47
PortalRegistry Collection Methods	47
First method: PortalRegistry collection	48
Item method: PortalRegistry collection	48
Next method: PortalRegistry collection	48
PortalRegistry Collection Property	49
Count property: PortalRegistry collection	49
Node Class	49
Node Class Properties	49
ActiveNode property: Node class	50
AppsRelease property: Node class	50
ContentURI property: Node class	50
DefaultPortalName property: Node class	50
Description property: Node class	50

IsDefault property: Node class	51
IsLocal property: Node class	51
Name property: Node class	51
NodePassword property: Node class	51
NodeType property: Node class	52
PortalURI property: Node class	52
ToolsRelease property: Node class	52
Node Collection	52
Node Collection Methods	52
First method: Node collection	53
ItemByName method: Node collection	53
Next method: Node collection	54
Node Collection Property	54
Count property: Node collection	54
RemoteNode Collection	54
RemoteNode Collection Methods	54
First method: RemoteNode collection	55
ItemByName method: RemoteNode collection	55
Next method: RemoteNode collection	56
RemoteNode Collection Property	56
Count property: RemoteNode collection	56
Portal Class	56
Portal Class Method	57
Save method: Portal class	57
Portal Class Properties	57
HostNodeName property: Portal class	57
IsLocal property: Portal class	57
Name property: Portal class	57
Portal Collection	58
Portal Collection Methods	58
First method: Portal collection	58
ItemByName method: Portal collection	58
Next method: Portal collection	59
Portal Collection Properties	59
Count property: Portal collection	59
NodeTemplate Class	60
NodeTemplate Class Properties	60
DefaultTemplate property: NodeTemplate class	60
Name property: NodeTemplate class	60
TemplateObject property: NodeTemplate class	60
NodeTemplate Collection	60
NodeTemplate Collection Methods	61

DeleteItem method: NodeTemplate collection	61
First method: NodeTemplate collection	61
InsertItem method: NodeTemplate collection	62
ItemByName method: NodeTemplate collection	62
Next method: NodeTemplate collection	63
NodeTemplate Collection Properties	63
Count property: NodeTemplate collection	63
Folder Class	64
Folder Class Method	64
Save method: Folder class	64
Folder Class Properties	64
AbnContentProvider property: Folder class	65
AbnDataSource property: Folder class	65
AbnPeopleCode property: Folder class	65
Attributes property: Folder class	66
Author property: Folder class	66
AuthorAccess property: Folder class	66
Authorized property: Folder class	66
CascadedPermissions property: Folder class	67
CascadedRolePermissions property: Folder class	67
ContentRefs property: Folder class	68
CreationDate property: Folder class	68
DefaultChartNavigation property: Folder class	68
Description property: Folder class	68
Folders property: Folder class	69
IsMobile property: Folder class	69
IsVisible property: Folder class	69
Label property: Folder class	70
Name property: Folder class	70
OwnerId property: Folder class	70
ParentName property: Folder class	70
Path property: Folder class	71
Permissions property: Folder class	71
Product property: Folder class	71
PublicAccess property: Folder class	71
RolePermissions property: Folder class	72
SequenceNumber property: Folder class	72
TreeEffectiveDate property: Folder class	72
TreeName property: Folder class	73
TreeSetId property: Folder class	73
TreeStructureName property: Folder class	74
TreeUserKeyValue property: Folder class	75

ValidFrom property: Folder class	76
ValidTo property: Folder class	76
Folder Collection	76
Folder Collection Methods	76
DeleteItem method: Folder collection	76
First method: Folder collection	77
InsertItem method: Folder collection	78
ItemByName method: Folder collection	78
Next method: Folder collection	79
Folder Collection Property	80
Count property: Folder collection	80
Content Reference Class	80
Content Reference Class Methods	80
CreateLink method: Content Reference class	80
Save method: Content Reference class	81
Content Reference Class Properties	82
AbsoluteContentURL property: Content Reference class	82
AbsolutePortalURL property: Content Reference class	82
AssignedPagelets property: Content Reference class	83
AssignedSections property: Content Reference class	83
Attributes property: Content Reference class	83
Author property: Content Reference class	83
AuthorAccess property: Content Reference class	83
Authorized property: Content Reference class	84
CascadedPermissions property: Content Reference class	84
CascadedRolePermissions property: Content Reference class	85
ContentProvider property: Content Reference class	85
CreationDate property: Content Reference class	85
Data property: Content Reference class	86
Description property: Content Reference class	86
DisplayIn property: Content Reference class	86
DisplayModalParams property: Content Reference class	87
EventName property: Content Reference class	87
GroupletAltHeight property: Content Reference class	88
GroupletAltWidth property: Content Reference class	88
GroupletAutoSize property: Content Reference class	89
GroupletContentProvider property: Content Reference class	89
GroupletContentURL property: Content Reference class	90
GroupletDisableHotspot property: Content Reference class	90
GroupletHeight property: Content Reference class	91
GroupletId property: Content Reference class	91
GroupletImageName property: Content Reference class	92

GroupletPageName property: Content Reference class	92
GroupletTimer property: Content Reference class	93
GroupletType property: Content Reference class	93
GroupletURL property: Content Reference class	94
GroupletURLType property: Content Reference class	95
GroupletWidth property: Content Reference class	96
HasGrouplet property: Content Reference class	96
HtmlText property: Content Reference class	96
IsFluid property: Content Reference class	96
IsMobile property: Content Reference class	97
IsSmallFFOptimized property: Content Reference class	97
IsVisible property: Content Reference class	98
Label property: Content Reference class	98
Links property: Content Reference class	98
Name property: Content Reference class	99
OwnerId property: Content Reference class	99
ParentName property: Content Reference class	99
Path property: Content Reference class	99
Permissions property: Content Reference class	99
Product property: Content Reference class	100
PublicAccess property: Content Reference class	100
QualifiedURL property: Content Reference class	100
RelativeURL property: Content Reference class	100
RolePermissions property: Content Reference class	101
SequenceNumber property: Content Reference class	101
StorageType property: Content Reference class	101
Template property: Content Reference class	102
TemplateObject property: Content Reference class	103
TemplateType property: Content Reference class	103
URL property: Content Reference class	104
URLType property: Content Reference class	104
UsageType property: Content Reference class	105
ValidFrom property: Content Reference class	105
ValidTo property: Content Reference class	106
Content Reference Collection	106
Content Reference Collection Methods	106
DeleteItem method: Content Reference collection	106
First method: Content Reference collection	107
InsertItem method: Content Reference collection	107
ItemByName method: Content Reference collection	109
Next method: Content Reference collection	109
Content Reference Collection Property	110

Count property: Content Reference collection	110
AttributeValue Class	110
AttributeValue Class Properties	110
Label property: AttributeValue class	110
Name property: AttributeValue class	110
Translatable property: AttributeValue class	111
Value property: AttributeValue class	111
Attribute Collection	112
Attribute Collection Methods	112
DeleteItem method: Attribute collection	112
First method: Attribute collection	113
InsertItem method: Attribute collection	113
ItemByName method: Attribute collection	114
Next method: Attribute collection	114
Attribute Collection Property	115
Count property: Attribute collection	115
PermissionValue Class	115
PermissionValue Class Properties	116
Cascade property: PermissionValue class	116
Name property: PermissionValue class	116
PermType property: PermissionValue class	116
PermissionValue Collection	116
PermissionValue Collection Methods	117
DeleteItem method: PermissionValue collection	117
First method: PermissionValue collection	118
InsertItem method: PermissionValue collection	118
ItemByName method: PermissionValue collection	119
Next method: PermissionValue collection	119
PermissionValue Collection Property	120
Count property: PermissionValue collection	120
RolePermissionValue Collection	120
RolePermissionValue Collection Methods	120
DeleteItem method: RolePermissionValue collection	121
First method: RolePermissionValue collection	121
InsertItem method: RolePermissionValue collection	122
ItemByName method: RolePermissionValue collection	122
Next method: RolePermissionValue collection	123
RolePermissionValue Collection Property	123
Count property: PermissionValue collection	123
ContentReference Links	124
ContentReference Links Methods	124
Delete method: Content Reference Link class	124

Save method: Content Reference Link class	125
ContentReference Links Properties	125
AbsoluteContentURL property: Content Reference Link class	125
AbsolutePortalURL property: Content Reference Link class	126
Attributes property: Content Reference Link class	126
Author property: Content Reference Link class	126
AuthorAccess property: Content Reference Link class	126
Authorized property: Content Reference Link class	127
CascadedPermissions property: Content Reference Link class	127
CascadedRolePermissions property: Content Reference Link class	127
ContentProvider property: Content Reference Link class	128
CreationDate property: Content Reference Link class	128
Data property: Content Reference Link class	128
Description property: Content Reference Link class	129
IsMobile property: Content Reference Link class	129
IsVisible property: Content Reference Link class	129
Label property: Content Reference Link class	130
Name property: Content Reference Link class	130
OwnerId property: Content Reference Link class	130
ParentName property: Content Reference Link class	130
Path property: Content Reference Link class	131
Permissions property: Content Reference Link class	131
Product property: Content Reference Link class	131
PublicAccess property: Content Reference Link class	131
RelativeURL property: Content Reference Link class	132
RolePermissions property: Content Reference Link class	132
SequenceNumber property: Content Reference Link class	132
Template property: Content Reference Link class	133
TemplateObject property: Content Reference Link class	133
TemplateType property: Content Reference Link class	133
URL property: Content Reference Link class	134
URLType property: Content Reference Link class	134
UsageType property: Content Reference Link class	134
ValidFrom property: Content Reference Link class	135
ValidTo property: Content Reference Link class	135
Link Collection	135
Link Collection Methods	135
First method: Links collection	135
Next method: Links collection	136
Link Collection Property	136
Count property: Links collection	136
Link Class	136

Link Properties	137
LinksObjectName property: Link class	137
LinksObjectType property: Link class	137
LinksPortalName property: Link class	137
TabDefinition Class	137
TabDefinition Class Methods	137
Save method: TabDefinition class	137
TabDefinition Class Properties	138
AssignedPagelets property: TabDefinition class	138
AssignedSections property: TabDefinition class	138
AvailableCategories property: TabDefinition class	138
AvailablePagelets property: TabDefinition class	139
Attributes property: TabDefinition class	139
Author property: TabDefinition class	139
AuthorAccess property: TabDefinition class	139
ColumnLayout property: TabDefinition class	139
CreationDate property: TabDefinition class	140
Description property: TabDefinition class	140
DynamicCategories property: TabDefinition class	140
HelpID property: TabDefinition class	140
HideInPersonalize property: TabDefinition class	141
HtmlText property: TabDefinition class	141
IsHideActionBar property: TabDefinition class	141
IsLayoutLocked property: TabDefinition class	141
IsPersonalizable property: TabDefinition class	141
IsRenameable property: TabDefinition class	142
Label property: TabDefinition class	142
LayoutBehavior property: TabDefinition class	142
Name property: TabDefinition class	142
OwnerId property: TabDefinition class	143
Product property: TabDefinition class	143
PublicAccess property: TabDefinition class	143
QualifiedURL property: TabDefinition class	143
SectAuthorAccess property: TabDefinition class	143
SectPermissions property: TabDefinition class	144
SectPublicAccess property: TabDefinition class	144
SectRoles property: TabDefinition class	144
SequenceNumber property: TabDefinition class	145
StyleSheet property: TabDefinition class	145
ValidFrom property: TabDefinition class	145
ValidTo property: TabDefinition class	145
TabDefinition Collection	146

TabDefinition Collection Methods	146
DeleteItem method: TabDefinition collection	146
First method: TabDefinition collection	147
InsertItem method: TabDefinition collection	147
ItemByName method: TabDefinition collection	148
Next method: TabDefinition collection	148
TabDefinition Collection Property	149
Count property: TabDefinition collection	149
AssignedPagelet Class	149
AssignedPagelet Class Properties	149
Column property: AssignedPagelet class	149
LayoutBehavior property: AssignedPagelet class	150
PageletName property: AssignedPagelet class	150
Row property: AssignedPagelet class	150
SectionName property: AssignedPagelet class	150
AssignedPagelet Collection	151
AssignedPagelet Collection Methods	151
DeleteItem method: AssignedPagelet collection	151
First method: AssignedPagelet collection	151
InsertItem method: AssignedPagelet collection	152
ItemByName method: AssignedPagelet collection	153
Next method: AssignedPagelet collection	153
AssignedPagelet Collection Property	154
Count property: AssignedPagelet collection	154
AssignedSection Class	154
AssignedSection Class Properties	155
AssignedPagelets property: AssignedSection class	155
AuthorAccess property: AssignedSection class	155
Authorized property: AssignedSection class	155
Permissions property: AssignedSection class	155
Column property: AssignedSection class	155
HideInPersonalize property: AssignedSection class	155
IsPersonalizable property: AssignedSection class	156
IsRenameable property: AssignedSection class	156
Label property: AssignedSection class	156
LayoutBehavior property: AssignedSection class	156
Name property: AssignedSection class	157
Order property: AssignedSection class	157
PublicAccess property: AssignedSection class	157
RolePermissions property: AssignedSection class	157
AssignedSections Collection	157
AssignedSections Collection Methods	157

DeleteItem method: AssignedSection collection	158
First method: AssignedSection collection	158
InsertItem method: AssignedSection collection	159
ItemByName method: AssignedSection collection	160
Next method: AssignedSection collection	160
AssignedSections Collection Property	161
Count property: AssignedSection collection	161
AvailableCategory Class	161
AvailableCategory Class Properties	161
AvailablePagelets property: AvailableCategory class	161
CategoryName property: AvailableCategory class	161
AvailableCategory Collection	162
AvailableCategory Collection Methods	162
First method: AvailableCategory collection	162
ItemByName method: AvailableCategory collection	162
Next method: AvailableCategory collection	163
AvailableCategory Collection Property	163
Count property: AvailableCategory collection	163
AvailablePagelet Class	164
AvailablePagelet Class Properties	164
CategoryLabel property: AvailablePagelet class	164
CategoryName property: AvailablePagelet class	164
Column property: AvailablePagelet class	164
LayoutBehavior property: AvailablePagelet class	164
PageletLabel property: AvailablePagelet class	165
PageletName property: AvailablePagelet class	165
Row property: AvailablePagelet class	165
AvailablePagelet Collection	165
AvailablePagelet Collection Methods	166
First method: AvailablePagelet collection	166
ItemByName method: AvailablePagelet collection	166
Next method: AvailablePagelet collection	167
AvailablePagelet Collection Property	167
Count property: AvailablePagelet collection	167
DynamicCategory Collection	167
DynamicCategory Collection Methods	168
DeleteItem method: DynamicCategory collection	168
First method: DynamicCategory collection	169
InsertItem method: DynamicCategory collection	169
ItemByName method: DynamicCategory collection	170
Next method: DynamicCategory collection	170
DynamicCategory Collection Property	171

Count property: DynamicCategory collection	171
PageletCategory Class	171
PageletCategory Class Method	171
Save method: PageletCategory class	171
PageletCategory Class Properties	172
Attributes property: PageletCategory class	172
Author property: PageletCategory class	172
AuthorAccess property: PageletCategory class	172
Authorized property: PageletCategory class	172
CascadedPermissions property: PageletCategory class	173
CreationDate property: PageletCategory class	173
Description property: PageletCategory class	173
Label property: PageletCategory class	173
Name property: PageletCategory class	174
OwnerId property: PageletCategory class	174
Pagelets property: PageletCategory class	174
Permissions property: PageletCategory class	174
Product property: PageletCategory class	175
PublicAccess property: PageletCategory class	175
SequenceNumber property: PageletCategory class	175
PageletCategory Collection	175
PageletCategory Collection Methods	176
DeleteItem method: PageletCategory collection	176
First method: PageletCategory collection	176
InsertItem method: PageletCategory collection	177
ItemByName method: PageletCategory collection	178
Next method: PageletCategory collection	178
PageletCategory Collection Property	178
Count property: PageletCategory collection	179
Pagelet Class	179
Pagelet Class Method	179
Save method: Pagelet class	179
Pagelet Class Properties	180
Attributes property: Pagelet class	180
Author property: Pagelet class	180
AuthorAccess property: Pagelet class	180
Authorized property: Pagelet class	180
CascadedPermissions property: Pagelet class	181
ContentProvider property: Pagelet class	181
CreationDate property: Pagelet class	181
DefaultColumn property: Pagelet class	181
Description property: Pagelet class	182

EditPageContentProvider property: Pagelet class	182
EditPageQueryString property: Pagelet class	182
HelpID property: Pagelet class	182
IsHideMinimize property: Pagelet class	182
Label property: Pagelet class	182
Name property: Pagelet class	183
OwnerId property: Pagelet class	183
ParentName property: Pagelet class	183
Permissions property: Pagelet class	183
Product property: Pagelet class	183
PublicAccess property: Pagelet class	184
QualifiedURL property: Pagelet class	184
SequenceNumber property: Pagelet class	184
URL property: Pagelet class	184
URLType property: Pagelet class	185
Pagelet Collection	185
Pagelet Collection Methods	185
DeleteItem method: Pagelet collection	185
First method: Pagelet collection	186
InsertItem method: Pagelet collection	186
ItemByName method: Pagelet collection	187
Next method: Pagelet collection	188
Pagelet Collection Property	188
Count property: Pagelet collection	188
UserHomepage Class	189
UserHomepage Class Method	189
Save method: UserHomepage class	189
UserHomepage Class Properties	189
Greeting property: UserHomepage class	190
UserId property: UserHomepage class	190
UserTab property: UserHomepage class	190
UserTab Class	190
UserTab Class Properties	190
ColumnLayout property: UserTab class	190
Label property: UserTab class	191
QualifiedURL property: UserTab class	191
SelectedPagelets property: UserTab class	191
SequenceNumber property: UserTab class	191
TabName property: UserTab class	192
UserTab Collection	192
UserTab Collection Methods	192
DeleteItem method: UserTab collection	192

First method: UserTab collection	193
InsertItem method: UserTab collection	193
ItemByName method: UserTab collection	194
Next method: UserTab collection	194
UserTab Collection Property	195
Count property: UserTab collection	195
SelectedPagelet Class	195
SelectedPagelet Class Properties	195
CategoryName property: SelectedPagelet class	195
Column property: SelectedPagelet class	195
IsMinimized property: SelectedPagelet class	196
PageletName property: SelectedPagelet class	196
Row property: SelectedPagelet class	196
SelectedPagelet Collection	196
SelectedPagelet Collection Methods	196
DeleteItem method: SelectedPagelet collection	196
First method: SelectedPagelet collection	197
InsertItem method: SelectedPagelet collection	197
ItemByName method: SelectedPagelet collection	198
Next method: SelectedPagelet collection	198
SelectedPagelet Collection Property	199
Count property: SelectedPagelet collection	199
Favorite Class	199
Favorite Class Properties	199
CRefName property: Favorite class	200
IsFolder property: Favorite class	200
Label property: Favorite class	200
QualifiedURL property: Favorite class	200
SequenceNumber property: Favorite class	200
URL property: Favorite class	200
Favorite Collection	201
Favorite Collection Methods	201
DeleteItem method: Favorite collection	201
First method: Favorite collection	202
InsertFolderItem method: Favorite collection	202
InsertItem method: Favorite collection	203
ItemByLabel method: Favorite collection	204
Next method: Favorite collection	204
Save method: Favorite collection	205
Favorite Collection Property	205
Count property: Favorite collection	205
Portal Registry Classes Example	205

Changing PortalRegistry Properties	205
Adding a ContentProvider	207
Adding a Folder	209
Adding a Content Reference	211
Setting Permissions Using the PermissionValue Object	214
Using Attributes	216
Visual Basic Example	217
C/C++ Example	218

41 PostReport Class

PostReport Class Overview	1
Determining the Distribution List	1
Data Type of a PostReport Object	1
Scope of a PostReport Object	1
PostReport Class Built-in Function	2
PostReport Class Methods	2
AddDistributionOption method: PostReport class	2
Put method: PostReport class	3
PostReport Class Properties	3
ExpirationDate property: PostReport class	4
OutDestFormat property: PostReport class	4
ProcessInstance property: PostReport class	4
ProcessName property: PostReport class	5
ProcessType property: PostReport class	5
ReportDescr property: PostReport class	5
ReportFolder property: PostReport class	6
ReportId property: PostReport class	6
ServerName property: PostReport class	6
SourceReportPath property: PostReport class	7
PostReport Class Examples	7

42 Process Request Classes

Understanding Process Request Classes	1
Data Type of a ProcessRequest Object	1
Scope of a ProcessRequest Object	1
Options for Items In Jobs and Jobsets	1
Values for Output Type and Format	5
Alternative Options to Specify Email or Web Attributes	7
File Dependant Processing	8
ProcessRequest Class Built-in Functions	8

ProcessRequest Class Methods	8
AddDistributionOption method: ProcessRequest class	8
AddNotifyInfo method: ProcessRequest class	9
PrintJobHTMLRpt method: ProcessRequest class	10
PrintJobRqstRpt method: ProcessRequest class	11
PrintSchdlHTMLRpt method: ProcessRequest class	14
RunJobSetNow method: ProcessRequest class	17
Schedule method: ProcessRequest class	17
SetEmailOption method: ProcessRequest class	18
SetItemFolder method: ProcessRequest class	19
SetNotifyAppMethod method: ProcessRequest class	20
SetNotifyService method: ProcessRequest class	23
SetOutputOption method: ProcessRequest class	25
UpdateRunStatus method: ProcessRequest class	26
ProcessRequest Class Properties	26
EmailAttachLog property: ProcessRequest class	27
EmailSubject property: ProcessRequest class	27
EmailText property: ProcessRequest class	27
EmailWebReport property: ProcessRequest class	27
FileName property: ProcessRequest class	28
JobName property: ProcessRequest class	28
LanguageCd property: ProcessRequest class	29
NotifyTextMsgNum property: ProcessRequest class	29
NotifyTextMsgSet property: ProcessRequest class	29
OutDest property: ProcessRequest class	30
OutDestFormat property: ProcessRequest class	31
OutDestType property: ProcessRequest class	32
PortalFolder property: ProcessRequest class	32
ProcessInstance property: ProcessRequest class	32
ProcessName property: ProcessRequest class	33
ProcessType property: ProcessRequest class	33
RunControlID property: ProcessRequest class	34
RunDateTime property: ProcessRequest class	34
RunLocation property: ProcessRequest class	35
RunRecurrence property: ProcessRequest class	35
RunStatus property: ProcessRequest class	35
Status property: ProcessRequest class	36
TimeZone property: ProcessRequest class	37
ProcessRequest Class Examples	37
Scheduling a Single Process	37
Scheduling a Job Where Job Item Changes Are Not Made	38
Scheduling a Job Where Job Item Changes Are Made	38

PrCsApi Class	39
Scope of a PrCsApi Object	39
Data Type of a PrCsApi Object	39
How to Import the PrCsApi Class	40
How to Create a PrCsApi Object	40
PrCsApi Class Constructor	40
PrCsApi method: PrCsApi class	40
PrCsApi Class Methods	41
getAllFileNames method: PrCsAPI class	41
notifyToWindow method: PrCsAPI class	42

43 PSSpreadsheet Class

Understanding the PSSpreadsheet Class	1
Instantiating the PSSpreadsheet Class	1
PSSpreadsheet Class Methods	1
CreateSheet method: PSSpreadsheet class	2
DeleteSheet method: PSSpreadsheet class	2
GetFileContent method: PSSpreadsheet class	3
InsertColumns method: PSSpreadsheet class	3
InsertRows method: PSSpreadsheet class	4
Open method: PSSpreadsheet class	4
RangeApplyStyle method: PSSpreadsheet class	5
RangeColOutline method: PSSpreadsheet class	6
RangeRowOutline method: PSSpreadsheet class	7
Save method: PSSpreadsheet class	8
SaveAs method: PSSpreadsheet class	8
SetActiveSheetName method: PSSpreadsheet class	9
SetCellDate method: PSSpreadsheet class	9
SetCellFormula method: PSSpreadsheet class	10
SetCellHeaderStyle method: PSSpreadsheet class	11
SetCellHyperlink method: PSSpreadsheet class	12
SetCellNumber method: PSSpreadsheet class	12
SetCellString method: PSSpreadsheet class	13
SetColumnWidth method: PSSpreadsheet class	14
SetRowSetData method: PSSpreadsheet class	14
SetSheetActivate method: PSSpreadsheet class	15

44 PTDirectTransferObject Class

Understanding the PTDirectTransferObject Class	1
PTDirectTransferObject Class Methods	1

SetAuth method: PTDirectTransferObject class	1
SetBody method: PTDirectTransferObject class	2
SetDocId method: PTDirectTransferObject class	2
SetHeader method: PTDirectTransferObject class	3
SetIndex method: PTDirectTransferObject class	4
SetMethod method: PTDirectTransferObject class	4
SetOption method: PTDirectTransferObject class	5
SetURL method: PTDirectTransferObject class	6
SyncTransfer method: PTDirectTransferObject class	6
Reset method: PTDirectTransferObject class	7
PTDirectTransferObject Class Built-in Functions	7

45 PTOCIInferenceSupervised Class

Understanding the PTOCIInferenceSupervised Class	1
PTOCIInferenceSupervised Class Methods	1
PredictRun method: PTOCIInferenceSupervised class	1

46 Push Notification Classes

Understanding the PSEvent Class	1
Instantiating the PSEvent Class	1
PSEvent Class Methods	1
AddRecipient method: PSEvent class	1
AddRecipients method: PSEvent class	2
GetRecipients method: PSEvent class	3
GetRowSetData method: PSEvent class	4
GetValueOfKey method: PSEvent class	5
Publish method: PSEvent class	5
RemoveRecipients method: PSEvent class	6
SetKeyValuePair method: PSEvent class	7
SetRowSetData method: PSEvent class	8
Subscribe method: PSEvent class	8
Unsubscribe method: PSEvent class	10
PTNotification Class	10
PTNotification Class Methods	10
AddAction method: PTNotification class	11
AddAttachment method: PTNotification class	11
AddHeader method: PTNotification class	11
AddRecipient method: PTNotification class	11
AddRecipients method: PTNotification class	12
AddTextAttachment method: PTNotification class	13

AddTextMedia method: PTNotification class	14
DisableIndividualMail method: PTNotification class	15
EnableTracking method: PTNotification class	15
GenerateKey method: PTNotification class	16
GetFailedPhoneNumbers method: PTNotification class	16
GetInvalidMailAddresses method: PTNotification class	17
GetMailErrorDescription method: PTNotification class	17
GetMailErrorDetails method: PTNotification class	18
GetNotificationStatus method: PTNotification class	18
GetSentMailAddresses method: PTNotification class	19
GetSentToPhoneNumbers method: PTNotification class	19
GetTextMsgCount method: PTNotification class	20
GetUnsentMailAddresses method: PTNotification class	20
GetUserNotificationStatus method: PTNotification class	21
LogTextMessageSID method: PTNotification class	21
NotifyHeadersOnly method: PTNotification class	22
NotifyOnDelay method: PTNotification class	22
NotifyOnError method: PTNotification class	23
NotifyOnSuccess method: PTNotification class	23
PTNotification method: PTNotification class	24
Send method: PTNotification class	25
SetBounceTo method: PTNotification class	25
SetCategory method: PTNotification class	26
SetMessage method: PTNotification class	26
SetMsgKey method: PTNotification class	27
SetOnClickUrl method: PTNotification class	27
SetPriority method: PTNotification class	28
SetReplyTo method: PTNotification class	28
SetSender method: PTNotification class	29
SetSMTPParam method: PTNotification class	29
SetSubject method: PTNotification class	30
SetTimeToWait method: PTNotification class	30
SetURLIdForText method: PTNotification class	30
NotificationManager Class	31
NotificationManager Class Methods	31
AddPersonalizationList method: NotificationManager class	31
AddPersonalizationLists method: NotificationManager class	32
ClearPersonalizationList method: NotificationManager class	33
Delete method: NotificationManager class	33
DisableMail method: NotificationManager class	34
DisablePush method: NotificationManager class	34
DisableText method: NotificationManager class	35

EnableMail method: NotificationManager class	35
EnablePersonalization method: NotificationManager class	36
EnablePush method: NotificationManager class	36
EnableText method: NotificationManager class	37
GetCategory method: NotificationManager class	37
GetDescription method: NotificationManager class	38
GetEventName method: NotificationManager class	38
GetOwnerDescr method: NotificationManager class	39
GetOwnerId method: NotificationManager class	39
IsMailAvailable method: NotificationManager class	40
IsMailDefault method: NotificationManager class	40
IsMandatory method: NotificationManager class	40
IsNew method: NotificationManager class	41
IsPersonalizationAllowed method: NotificationManager class	41
IsPersonalized method: NotificationManager class	42
IsPushAvailable method: NotificationManager class	42
IsPushDefault method: NotificationManager class	42
IsTextAvailable method: NotificationManager class	43
IsTextDefault method: NotificationManager class	43
NotificationManager method: NotificationManager class	44
RemoveFromPersonalizationList method: NotificationManager class	44
ResetUserPersonalization method: NotificationManager class	45
ResetUserPersonalizations method: NotificationManager class	45
Save method: NotificationManager class	46
SetDescription method: NotificationManager class	46
SetEventName method: NotificationManager class	47
SetFuncCategory method: NotificationManager class	47
SetMailAvailable method: NotificationManager class	48
SetMandatory method: NotificationManager class	48
SetOwnerId method: NotificationManager class	49
SetPushAvailable method: NotificationManager class	49
SetTextAvailable method: NotificationManager class	50

47 Query Classes

Understanding Query Classes	1
Collections in the Query Classes	1
Life Cycle of a Query	2
Query API Overview	3
Query	4
QuerySelect	4
QueryRecords	4

QueryOutputFields	4
QuerySelectedFields	5
QueryCriteria	5
QueryDBRecords and QueryDBRecordFields	5
Working With Query Criteria and Expressions	6
Setting the Expression Type	6
Adding New Expressions	6
Adding an Operator and Expression 2 Dependencies	6
Setting a Drilling URL	7
Query Monitor	9
Using Query Metadata	9
Running a Query	10
Specifying the User's Language	11
Query Security	11
Error Handling With Query Classes	12
Understanding QueryOutputFields and QuerySelectedFields	13
Understanding Having Criteria	13
Data Type of Query Objects	14
Scope of Query Objects	14
Query Classes Reference	14
Session Class Methods in the Query API	15
AdvancedSearchQueries method: Session class	15
AdvancedSearchRecords method: Session class	18
FindQueryDBRecords method: Session class	20
FindQueries method: Session class	20
FindQueriesDateRange method: Session class	21
GetQuery method: Session class	22
GetQuerySecurityProfile method: Session class	23
SearchQueryDBRecords method: Session class	23
SearchPrivateQueries method: Session class	25
SearchPublicQueries method: Session class	26
Query Collection	27
Query Collection Methods	28
First method: Query collection	28
Item method: Query collection	28
ItemByName method: Query collection	29
Next method: Query collection	30
Query Collection Property	30
Count property: Query collection	30
Query Class	30
Query Class Methods	31
AddPrompt method: Query class	31

AddQuerySelect method: Query class	31
AddTrackingURL method: Query class	32
Close method: Query class	33
CopyPrivateQuery method: Query class	34
Create method: Query class	35
Delete method: Query class	36
DeletePrompt method: Query class	37
FindExpression method: Query class	37
FormatBinaryResultString method: Query class	38
FormatResultString method: Query class	39
GetTreePromptCount method: Query class	40
Open method: Query class	41
Rename method: Query class	42
RunToFile method: Query class	42
RunToRowset method: Query class	45
RunToString method: Query class	47
Save method: Query class	50
SetTrackingURL method: Query class	51
Query Class Properties	52
Approved property: Query class	52
ApproveOpriId property: Query class	52
ApproveUserId property: Query class	52
ApproveDtTm property: Query class	53
CreateOpriId property: Query class	53
CreateDtTm property: Query class	53
CreateUserId property: Query class	53
Description property: Query class	53
Disabled property: Query class	54
ExecAppName property: Query class	54
ExecLogging property: Query class	54
Folder property: Query class	55
LastSQLErrorCode property: Query class	55
LastUpdDttm property: Query class	55
LastUpdOpriId property: Query class	55
LongDescription property: Query class	55
Metadata property: Query class	55
MetaSQL property: Query class	56
MoreRowsAvailable property: Query class	56
Name property: Query class	56
OutputUnicode property: Query class	57
PDFFont property: Query class	57
Prompts property: Query class	58

PromptRecord property: Query class	58
PublicPrivate property: Query class	58
QuerySelect property: Query class	59
QueryStatistics property: Query class	59
RunTimePrompts property: Query class	59
SQL property: Query class	60
Type property: Query class	60
QuerySelect Collection	60
QuerySelect Collection Methods	61
AddUnion method: QuerySelect collection	61
DeleteQuerySelect method: QuerySelect collection	61
First method: QuerySelect collection	62
Item method: QuerySelect collection	62
ItemBySelNum method: QuerySelect collection	63
Next method: QuerySelect collection	63
QuerySelect Collection Property	64
Count property: QuerySelect collection	64
QuerySelect Class	64
QuerySelect Methods	65
AddAllFields method: QuerySelect class	65
AddCriteria method: QuerySelect class	66
AddExpression method: QuerySelect class	66
AddHavingCriteria method: QuerySelect class	67
AddQueryOutputField method: QuerySelect class	68
AddQueryRecord method: QuerySelect class	68
AddQuerySelectedField method: QuerySelect class	69
DeleteCriteria method: QuerySelect class	70
DeleteExpression method: QuerySelect class	70
DeleteField method: QuerySelect class	71
DeleteHavingCriteria method: QuerySelect class	71
DeleteRecord method: QuerySelect class	72
QuerySelect Properties	72
Criteria property: QuerySelect class	73
Distinct property: QuerySelect class	73
Expressions property: QuerySelect class	73
HavingCriteria property: QuerySelect class	73
ParentSelectNum property: QuerySelect class	73
QueryOutputFields property: QuerySelect class	74
QueryRecords property: QuerySelect class	74
QuerySelectedFields property: QuerySelect class	74
QuerySelects property: QuerySelect class	74
SelectNum property: QuerySelect class	75

SelectType property: QuerySelect class	75
QueryRecord Collection	75
QueryRecord Collection Methods	75
First method: QueryRecord collection	76
Item method: QueryRecord collection	76
ItemByAlias method: QueryRecord collection	77
Next method: QueryRecord collection	77
QueryRecord Collection Property	78
Count property: QueryRecord collection	78
QueryRecord Class	78
QueryRecord Class Method	78
GetField method: QueryRecord class	78
QueryRecord Class Properties	79
Description property: QueryRecord class	79
JoinAlias property: QueryRecord class	79
JoinFieldName property: QueryRecord class	79
JoinType property: QueryRecord class	80
Name property: QueryRecord class	80
QueryFields property: QueryRecord class	80
RecordAlias property: QueryRecord class	80
QueryField Collection	81
QueryField Collection Methods	81
First method: QueryField collection	81
Item method: QueryField collection	82
ItemByNameAndAlias method: QueryField collection	82
ItemByExpNum method: QueryField collection	83
Next method: QueryField collection	83
QueryField Collection Property	84
Count property: QueryField collection	84
QueryField Class	84
QueryField Class Methods	84
AddTranslateExpression method: QueryField class	84
AddTranslateField method: QueryField class	85
GetImageFormat method: QueryField class	86
QueryField Class Properties	86
Aggregate property: QueryField class	86
ColumnNumber property: QueryField class	87
Description property: QueryField class	87
Decimal property: QueryField class	87
ExpNum property: QueryField class	87
Flag property: QueryField class	87
Format property: QueryField class	87

HeadingText property: QueryField class	88
HeadingType property: QueryField class	88
HeadingUniqueFieldName property: QueryField class	88
Length property: QueryField class	89
LongName property: QueryField class	89
Name property: QueryField class	89
OrderByDirection property: QueryField class	89
OrderByNumber property: QueryField class	90
QueryRecord property: QueryField class	90
RecordAlias property: QueryField class	91
ShortName property: QueryField class	91
TranslateEffDtLogic property: QueryField class	91
TranslateExpression property: QueryField class	91
TranslateField property: QueryField class	92
TranslateOption property: QueryField class	92
Type property: QueryField class	92
QueryCriteria Collection	93
QueryCriteria Collection Methods	93
First method: QueryCriteria collection	93
Item method: QueryCriteria collection	93
ItemByName method: QueryCriteria collection	94
Next method: QueryCriteria collection	95
QueryCriteria Collection Property	95
Count property: QueryCriteria collection	95
QueryCriteria Class	95
QueryCriteria Class Methods	96
AddExpr1Expression method: QueryCriteria class	96
AddExpr1Field method: QueryCriteria class	96
AddExpr2Expression method: QueryCriteria class	97
AddExpr2Field1 method: QueryCriteria class	98
AddExpr2Field2 method: QueryCriteria class	98
AddExpr2List method: QueryCriteria class	99
AddExpr2Subquery method: QueryCriteria class	99
QueryCriteria Class Properties	100
Expr1Expression property: QueryCriteria class	100
Expr1Field property: QueryCriteria class	100
Expr1Type property: QueryCriteria class	101
Expr2Constant1 property: QueryCriteria class	102
Expr2Constant2 property: QueryCriteria class	102
Expr2Expression1 property: QueryCriteria class	102
Expr2Expression2 property: QueryCriteria class	102
Expr2Field1 property: QueryCriteria class	103

Expr2Field2 property: QueryCriteria class	103
Expr2List property: QueryCriteria class	103
Expr2Subquery property: QueryCriteria class	103
Expr2Type property: QueryCriteria class	104
Logical property: QueryCriteria class	106
LParenLvl property: QueryCriteria class	107
Name property: QueryCriteria class	107
Negation property: QueryCriteria class	107
Operator property: QueryCriteria class	107
R1ExprNum property: QueryCriteria class	109
R2ExprNum property: QueryCriteria class	109
R1ExprType property: QueryCriteria class	110
R2ExprType property: QueryCriteria class	110
RParenLvl property: QueryCriteria class	110
QueryExpression Collection	110
QueryExpression Collection Methods	110
First method: QueryExpression collection	110
Item method: QueryExpression collection	111
ItemByName method: QueryExpression collection	111
Next method: QueryExpression collection	112
QueryExpression Collection Property	112
Count property: QueryExpression collection	112
QueryExpression Class	113
QueryExpression Class Properties	113
Aggregate property: QueryExpression class	113
BindFlag property: QueryExpression class	113
Decimal property: QueryExpression class	114
ExpNum property: QueryExpression class	114
IsXlatExpression property: QueryExpression class	114
Length property: QueryExpression class	114
Name property: QueryExpression class	114
OutputField property: QueryExpression class	114
RightExprFlag property: QueryExpression class	115
SelectedField property: QueryExpression class	115
Text property: QueryExpression class	115
Type property: QueryExpression class	116
QueryList Class	116
QueryList Class Methods	116
AddListValue method: QueryList class	116
First method: QueryList class	117
Item method: QueryList class	117
Next method: QueryList class	118

QueryList Class Property	118
Count property: QueryList class	118
QueryListValue Class	119
QueryListValue Class Properties	119
IsPrompt property: QueryListValue class	119
Value property: QueryListValue class	119
QueryRecordHierarchy Collection	119
QueryRecordHierarchy Collection Methods	119
First method: QueryRecordHierarchy collection	119
Item method: QueryRecordHierarchy collection	120
ItemByName method: QueryRecordHierarchy collection	120
Next method: QueryRecordHierarchy collection	121
QueryRecordHierarchy Collection Property	121
Count property: QueryRecordHierarchy collection	122
QueryRecordHierarchy Class	122
QueryRecordHierarchy Class Properties	122
Description property: QueryRecordHierarchy class	122
Level property: QueryRecordHierarchy class	122
Name property: QueryRecordHierarchy class	122
ParentFlag property: QueryRecordHierarchy class	123
Query Metadata Collection	123
Query Metadata Collection Methods	123
First method: Query Metadata collection	123
Item method: Query Metadata collection	124
ItemByName method: Query Metadata collection	124
Next method: Query Metadata collection	125
Query Metadata Collection Property	125
Count property: Query Metadata collection	125
Query Metadata Class	125
Query Metadata Class Properties	126
Name property: Query Metadata class	126
Value property: Query Metadata class	126
QueryStatistics Class	126
QueryStatistics Class Properties	127
AvgExecTime property: QueryStatistics class	127
AvgFetchTime property: QueryStatistics class	127
AvgNumRows property: QueryStatistics class	127
ExecCount property: QueryStatistics class	127
LastExecDtTm property: QueryStatistics class	127
QuerySecurityProfile Class	127
QuerySecurityProfile Class Properties	128
AllowAnyJoin property: QuerySecurityProfile class	128

AllowDistinct property: QuerySecurityProfile class	128
AllowExpressions property: QuerySecurityProfile class	128
AllowSubqueries property: QuerySecurityProfile class	128
AllowUnions property: QuerySecurityProfile class	128
ApprovePrivateQuery property: QuerySecurityProfile class	129
ApprovePublicQuery property: QuerySecurityProfile class	129
CanCreatePublic property: QuerySecurityProfile class	129
CanCreateWorkFlow property: QuerySecurityProfile class	129
CanModifyQuery property: QuerySecurityProfile class	129
CanRunQuery property: QuerySecurityProfile class	130
CanRunToExcel property: QuerySecurityProfile class	130
LimitUnapproved property: QuerySecurityProfile class	130
MaxInTreeCriteria property: QuerySecurityProfile class	130
MaxJoins property: QuerySecurityProfile class	130
MaxRowsToFetch property: QuerySecurityProfile class	131
MaxUnapprovedRows property: QuerySecurityProfile class	131
QueryDBRecord Collection	131
QueryDBRecord Collection Methods	131
First method: QueryDBRecord collection	131
Item method: QueryDBRecord collection	132
ItemByName method: QueryDBRecord collection	132
Next method: QueryDBRecord collection	133
QueryDBRecord Collection Property	133
Count property: QueryDBRecord collection	133
QueryDBRecord Class	134
QueryDBRecord Class Methods	134
QueryDBRecordFieldByIndex method: QueryDBRecord class	134
QueryDBRecordFieldByName method: QueryDBRecord class	134
QueryDBRecord Class Properties	135
Description property: QueryDBRecord class	135
Name property: QueryDBRecord class	135
QueryDBRecordFields property: QueryDBRecord class	135
RecordHierachy property: QueryDBRecord class	136
QueryDBRecordField Collection	136
QueryDBRecordField Collection Methods	136
First method: QueryDBRecordField collection	136
Item method: QueryDBRecordField collection	137
ItemByName method: QueryDBRecordField collection	137
Next method: QueryDBRecordField collection	138
Sort method: QueryDBRecordField collection	138
QueryDBRecordField Collection Property	139
Count property: QueryDBRecordField collection	139

QueryDBRecordField Class	139
QueryDBRecordField Class Method	139
GetImageFormat method: QueryDBRecordField class	140
QueryDBRecordField Class Properties	140
Decimal property: QueryDBRecordField class	140
Description property: QueryDBRecordField class	140
Flag property: QueryDBRecordField class	141
Format property: QueryDBRecordField class	141
Length property: QueryDBRecordField class	142
LongName property: QueryDBRecordField class	142
LookupTableName property: QueryDBRecordField class	142
LookupTableRecord property: QueryDBRecordField class	142
Name property: QueryDBRecordField class	143
Shortname property: QueryDBRecordField class	143
Type property: QueryDBRecordField class	143
QueryPrompt Collection	144
QueryPrompt Collection Methods	144
First method: QueryPrompt collection	144
Item method: QueryPrompt collection	144
ItemByName method: QueryPrompt collection	145
Next method: QueryPrompt collection	145
QueryPrompt Collection Property	146
Count property: QueryPrompt collection	146
QueryPrompt Class	146
QueryPrompt Properties	146
EditType property: QueryPrompt class	146
FieldDecimal property: QueryPrompt class	147
FieldFormat property: QueryPrompt class	147
FieldLength property: QueryPrompt class	148
FieldName property: QueryPrompt class	148
FieldType property: QueryPrompt class	148
HeadingText property: QueryPrompt class	148
HeadingType property: QueryPrompt class	148
LangCount property: QueryPrompt class	149
Name property: QueryPrompt class	149
PromptRecordFieldName property: QueryPrompt class	149
PromptTable property: QueryPrompt class	149
UniquePromptName property: QueryPrompt class	149
UseCount property: QueryPrompt class	150
Query Classes Examples	150
Creating a New Query	150
Adding Criteria	152

48 Record Class

Understanding Record Class	1
Shortcut Considerations	1
Record Methods Used to Create SQL Statements	2
Data Type of a Record Object	3
Scope of a Record Object	3
Record Class Built-in Functions	3
Record Class Methods	3
CompareFields method: Record class	3
CopyChangedFieldsTo method: Record class	4
CopyFieldsTo method: Record class	5
Delete method: Record class	8
ExecuteEdits method: Record class	9
GetField method: Record class	11
Insert method: Record class	14
Save method: Record class	15
SearchClear method: Record class	19
SelectByKey method: Record class	19
SelectByKeyEffDt method: Record class	21
SetDefault method: Record class	23
SetEditTable method: Record class	24
Update method: Record class	26
Record Class Properties	27
FieldCount property: Record class	27
fieldname property: Record class	28
IsChanged property: Record class	28
IsDeleted property: Record class	29
IsEditError property: Record class	29
Name property: Record class	30
ParentRow property: Record class	30
RelLangRecName property: Record class	31
SystemIDFieldName property: Record class	31
TimeStampFieldName property: Record class	32

49 Row Class

Understanding Row Class	1
Shortcut Considerations	1
Data Type of a Row Object	2

Scope of a Row Object	2
Row Class Built-in Function	2
Row Class Methods	2
CopyTo method: Row class	2
GetNextEffRow method: Row class	3
GetPriorEffRow method: Row class	4
GetRecord method: Row class	4
GetRowset method: Row class	6
scrollname method: Row class	7
Row Class Properties	7
ChildCount property: Row class	8
DeleteEnabled property: Row class	8
IsChanged property: Row class	9
IsDeleted property: Row class	10
IsEditError property: Row class	10
IsNew property: Row class	11
ParentRowset property: Row class	11
recname property: Row class	12
RecordCount property: Row class	12
RowNumber property: Row class	12
Selected property: Row class	13
Style property: Row class	13
Visible property: Row class	14

50 Related Content Framework Classes

Understanding the Related Content Framework Classes	1
RCServicesDefinition Class	2
RCServicesDefinition Class Methods	2
AppendRCPParam method: RCServicesDefinition class	2
CloneForNew method: RCServicesDefinition class	3
Delete method: RCServicesDefinition class	4
DeleteRCPParam method: RCServicesDefinition class	4
GetRCPParamCount method: RCServicesDefinition class	5
GetRCPParameter method: RCServicesDefinition class	6
RCServicesDefinition method: RCServicesDefinition class	7
Rename method: RCServicesDefinition class	7
Save method: RCServicesDefinition class	8
RCServicesDefinition Class Properties	9
AppclassId property: RCServicesDefinition class	9
Descr property: RCServicesDefinition class	9
EscapeParam property: RCServicesDefinition class	10

FieldName property: RCServiceDefinition class	10
IsBulkAction property: RCServiceDefinition class	11
IsNew property: RCServiceDefinition class	11
LanguageCD property: RCServiceDefinition class	12
Market property: RCServiceDefinition class	12
MsgNodeName property: RCServiceDefinition class	13
PackageRoot property: RCServiceDefinition class	13
PcEventType property: RCServiceDefinition class	14
PcFunctionName property: RCServiceDefinition class	14
PnlGrpName property: RCServiceDefinition class	15
PnlName property: RCServiceDefinition class	15
PortalMenuName property: RCServiceDefinition class	16
PortalRecName property: RCServiceDefinition class	17
PortalUrlAdm property: RCServiceDefinition class	17
PortalUriText property: RCServiceDefinition class	18
PostMapdata property: RCServiceDefinition class	18
PtppbPageletId property: RCServiceDefinition class	18
QualifyPath property: RCServiceDefinition class	19
Queryname property: RCServiceDefinition class	19
SecUseEdit property: RCServiceDefinition class	19
ServiceId property: RCServiceDefinition class	20
ServiceName property: RCServiceDefinition class	20
ServiceType property: RCServiceDefinition class	21
ServiceUrlType property: RCServiceDefinition class	21
SrvAttribute property: RCServiceDefinition class	22
SrvHelpText property: RCServiceDefinition class	22
TileCategory property: RCServiceDefinition class	23
Usedit property: RCServiceDefinition class	23
ValFromDt property: RCServiceDefinition class	23
ValToDt property: RCServiceDefinition class	24
RCPParameter Class	24
RCPParameter Class Properties	24
Descr property: RCPParameter class	24
ParameterName property: RCPParameter class	25
RequiredFlg property: RCPParameter class	25
SeqNum property: RCPParameter class	26
RCService Class	26
RCService Class Methods	27
AddNewService method: RCService class	27
Delete method: RCService class	28
DeleteService method: RCService class	29
DeleteServiceInstance method: RCService class	30

GetInstanceId method: RCTService class	30
GetServiceInfo method: RCTService class	31
RCTService method: RCTService class	32
Save method: RCTService class	33
RCTService Class Properties	33
ExpandFrame property: RCTService class	34
IsNew property: RCTService class	34
MenuName property: RCTService class	34
MinPagelets property: RCTService class	35
PnlGrpName property: RCTService class	35
RCTFrameLoc property: RCTService class	36
RCTServiceConfig Class	36
RCTServiceConfig Class Methods	37
AddPageFieldMenu method: RCTServiceConfig class	37
AppendMapField method: RCTServiceConfig class	39
CloneForNew method: RCTServiceConfig class	40
CloneForNewFull method: RCTServiceConfig class	41
Delete method: RCTServiceConfig class	43
DeleteMapField method: RCTServiceConfig class	44
GetMapField method: RCTServiceConfig class	45
GetMapFieldCount method: RCTServiceConfig class	46
Save method: RCTServiceConfig class	47
RCTServiceConfig Class Properties	48
AllowPersonalization property: RCTServiceConfig class	48
cEnable property: RCTServiceConfig class	49
cInitMin property: RCTServiceConfig class	49
CompEvent property: RCTServiceConfig class	49
CompRecEvent property: RCTServiceConfig class	50
EventRecName property: RCTServiceConfig class	51
FieldName property: RCTServiceConfig class	52
InstanceId property: RCTServiceConfig class	53
InstanceLbl property: RCTServiceConfig class	53
IsCompService property: RCTServiceConfig class	53
IsDefault property: RCTServiceConfig class	54
IsEmbeddable property: RCTServiceConfig class	54
IsNew property: RCTServiceConfig class	54
LanguageCD property: RCTServiceConfig class	55
MainMenuOpt property: RCTServiceConfig class	55
MenuOpt property: RCTServiceConfig class	56
PnlName property: RCTServiceConfig class	56
PortalName property: RCTServiceConfig class	57
PortalObjName property: RCTServiceConfig class	57

ProcessSeq property: RCServiceConfig class	57
SeqNum property: RCServiceConfig class	58
ServiceId property: RCServiceConfig class	58
SrcvAttribute property: RCServiceConfig class	59
UrlTarget property: RCServiceConfig class	59
RCMapFields Class	60
RCMapFields Class Methods	60
CopyFrom method: RCMapFields class	60
Save method: RCMapFields class	61
RCMapFields Class Properties	62
FieldMenuOpt property: RCMapFields class	62
MapFieldType property: RCMapFields class	63
MapNullValue property: RCMapFields class	63
ParameterName property: RCMapFields class	64
PnlFieldName property: RCMapFields class	64
PnlName property: RCMapFields class	65
RefreshService property: RCMapFields class	65
RCMenuLayout Class	65
RCMenuLayout Class Methods	66
AddFolder method: RCMenuLayout class	66
CloneForNew method: RCMenuLayout class	67
CloneForNewFull method: RCMenuLayout class	68
Delete method: RCMenuLayout class	70
DeleteFolder method: RCMenuLayout class	71
DeleteMenuLink method: RCMenuLayout class	72
GetFolder method: RCMenuLayout class	73
GetFolderCount method: RCMenuLayout class	74
GetFolderFromFolderId method: RCMenuLayout class	74
Save method: RCMenuLayout class	75
RCMenuLayout Class Properties	76
IsNew property: RCMenuLayout class	76
LanguageCD property: RCMenuLayout class	76
MenuId property: RCMenuLayout class	77
MenuType property: RCMenuLayout class	77
PnlFldName property: RCMenuLayout class	78
PnlName property: RCMenuLayout class	78
PortalName property: RCMenuLayout class	78
PortalObjName property: RCMenuLayout class	79
RCMenuFolder Class	79
RCMenuFolder Class Methods	79
AppendMenuLink method: RCMenuFolder class	80
DeleteMenuLink method: RCMenuFolder class	81

GetMenuLink method: RCMenueFolder class	82
GetMenuLinkCount method: RCMenueFolder class	83
RCMenuFolder Class Properties	83
FolderId property: RCMenueFolder class	84
FolderLbl property: RCMenueFolder class	84
FolderSeqNum property: RCMenueFolder class	84
PrntFolderId property: RCMenueFolder class	84
RCMenuLink Class	85
RCMenuLink Class Properties	85
InstancelId property: RCMenueLink class	85
SeqNum property: RCMenueLink class	85
ServiceId property: RCMenueLink class	85
Additional PeopleCode Examples	86
Creating Service Definitions and Service Configurations	86

51 Rowset Class

Understanding Rowset Class	1
Shortcut Considerations	1
Data Type of a Rowset Object	1
Scope of a Rowset Object	2
Rowset Class Built-In Functions	2
Rowset Class Methods	2
ClearDeletesChanges method: Rowset class	2
CopyTo method: Rowset class	4
DeleteRow method: Rowset class	6
Fill method: Rowset class	8
FillAppend method: Rowset class	11
FillChunk method: Rowset class	13
Find method: Rowset class	15
Flush method: Rowset class	16
FlushRow method: Rowset class	18
GetCurrEffRow method: Rowset class	19
GetFirstUserSortedRow method: Rowset class	20
GetLastUserSortedRow method: Rowset class	20
GetNewEffRow method: Rowset class	21
GetRow method: Rowset class	22
HideAllRows method: Rowset class	23
InsertRow method: Rowset class	24
IsUserSorted method: Rowset class	25
MapBufRowToUserSortRow method: Rowset class	26
MapUserSortRowToBufRow method: Rowset class	27

Refresh method: Rowset class	28
Select method: Rowset class	30
SelectNew method: Rowset class	32
SetDefault method: Rowset class	34
ShowAllRows method: Rowset class	35
Sort method: Rowset class	36
Rowset Class Properties	37
ActiveRowCount property: Rowset class	37
ChangeOnInit property: Rowset class	38
DataAreaCollapsed property: Rowset class	38
DBRecordName property: Rowset class	39
DeleteEnabled property: Rowset class	40
EffDt property: Rowset class	41
EffSeq property: Rowset class	41
InsertEnabled property: Rowset class	42
IsEditError property: Rowset class	43
Level property: Rowset class	43
Name property: Rowset class	44
ParentRow property: Rowset class	44
ParentRowset property: Rowset class	44
RowCount property: Rowset class	45
SetComponentChanged property: Rowset class	45
TopRowNumber property: Rowset class	45

52 RowsetCache Class

Understanding a Rowset Cache	1
Using the RowsetCache Class	1
Error Handling	2
Data Type of a RowsetCache Object	2
Scope of a RowsetCache Object	2
RowsetCache Class Built-in Functions	3
RowsetCache Class Methods	3
Delete method: RowsetCache class	3
Get method: RowsetCache class	4
Save method: RowsetCache class	5
RowsetCache Class Properties	6
Content property: RowsetCache class	6
Description property: RowsetCache class	7

53 Security Authorization Classes

Understanding the Security Authorization Classes	1
Importing the Security Authorization Classes	1
AuthRequest Class	1
AuthRequest Class Methods	2
GetParameterValue method: AuthRequest class	2
AuthRequest Class Properties	3
Access property: AuthRequest class	3
UserId property: AuthRequest class	3
SecurityHandler Class	4
SecurityHandler Class Methods	4
GetAuthorization method: SecurityHandler class	4
Implementing a Security Authorization Handler	4

54 Session Class

Understanding Session Class	1
Security and Access to the PeopleSoft System	2
Error Handling	2
Displaying Error Messages	4
Regional Settings	4
Trace Settings	4
Session Object Declaration	5
State Considerations	5
Considerations for Declaring Collections	6
Scope of a Session Object	6
Session Class Built-in Function	6
Session Class Methods	6
Connect method: Session class	7
Disconnect method: Session class	8
API Instantiation Methods	9
Session Class Properties	10
ErrorPending property: Session class	10
PSMessages property: Session class	10
PSMessagesMode property: Session class	11
RegionalSettings property: Session class	12
Repository property: Session class	12
SuspendFormatting property: Session class	12
TraceSettings property: Session class	12
WarningPending property: Session class	13
Accessing a PSMessages Collection	13

PSMessages Collection Methods	13
DeleteAll method: PSMessages collection	13
DeleteItem method: PSMessages collection	14
First method: PSMessages collection	14
Item method: PSMessages collection	15
Next method: PSMessages collection	15
PSMessages Collection Property	15
Count property: PSMessages collection	16
PSMessage Class Properties	16
ExplainText property: PSMessage class	16
MessageNumber property: PSMessage class	16
MessageSetNumber property: PSMessage class	16
MessageType property: PSMessage class	17
Source property: PSMessage class	17
Text property: PSMessage class	19
Regional Settings Class Properties	20
ClientTimeZone property: Regional Settings class	20
CurrencyFormat property: Regional Settings class	20
CurrencySymbol property: Regional Settings class	20
DateFormat property: Regional Settings class	21
DateSeparator property: Regional Settings class	21
DecimalSymbol property: Regional Settings class	21
DigitGroupingSymbol property: Regional Settings class	21
LanguageCD property: Regional Settings class	22
UseLocalTime property: Regional Settings class	23
1159Separator property: Regional Settings class	23
2359Separator property: Regional Settings class	23
Trace Setting Class Properties	24
API property: TraceSetting class	24
COBOLStmtTimings property: TraceSetting class	24
ConnDisRollbackCommit property: TraceSetting class	25
DBSpecificCalls property: TraceSetting class	25
ManagerInfo property: TraceSetting class	25
NetworkServices property: TraceSetting class	25
NonSSBs property: TraceSetting class	25
OutputUNICODE property: TraceSetting class	26
PCExtFcnCalls property: TraceSetting class	26
PCFcnReturnValues property: TraceSetting class	26
PCFetchedValues property: TraceSetting class	26
PCIntFcnCalls property: TraceSetting class	26
PCListProgram property: TraceSetting class	27
PCParameterValues property: TraceSetting class	27

PCProgramStatements property: TraceSetting class	27
PCStack property: TraceSetting class	27
PCStartOfPrograms property: TraceSetting class	27
PCTraceProgram property: TraceSetting class	28
PCVariableAssignments property: TraceSetting class	28
RowFetch property: TraceSetting class	28
SQLStatement property: TraceSetting class	28
SQLStatementVariables property: TraceSetting class	28
SSBs property: TraceSetting class	29
SybBindInfo property: TraceSetting class	29
SybFetchInfo property: TraceSetting class	29
TraceFile property: TraceSetting class	29

55 SOAPDoc Class

Understanding theSOAPDoc Class	1
SOAP Message Exchange Model	1
SOAP Message Document	2
The SOAPDoc Class	3
SOAPDoc Object Creation	3
SOAP Header Section	3
SOAP Envelope Section	4
SOAP Body Section	4
SOAP Method Section	4
SOAPDoc Section Access	5
PeopleCode to Create a SOAPDoc	6
SOAPDoc Fault Section	6
The ValidateSOAPDoc Method	6
SOAPDoc Objects and Messages	6
Data Type of a SOAPDoc Object	7
Scope of a SOAPDoc Object	7
SOAPDoc Built-In Functions	7
SOAPDoc Class Methods	7
AddBody method: SOAPDoc class	8
AddEnvelope method: SOAPDoc class	9
AddFault method: SOAPDoc class	12
AddHeader method: SOAPDoc class	13
AddMethod method: SOAPDoc class	15
AddParm method: SOAPDoc class	16
GetParmName method: SOAPDoc class	17
GetParmValue method: SOAPDoc class	18
ValidateSOAPDoc method: SOAPDoc class	18

SOAPDoc Class Properties	19
BodyNode property: SOAPDoc class	19
EnvelopeNode property: SOAPDoc class	20
FaultCode property: SOAPDoc class	20
FaultCodeS property: SOAPDoc class	21
FaultString property: SOAPDoc class	21
HeaderNode property: SOAPDoc class	21
MethodName property: SOAPDoc class	22
MethodNode property: SOAPDoc class	23
ParmCount property: SOAPDoc class	23
XmlDoc property: SOAPDoc class	23
SOAPDoc Class Examples	24
Creating a SOAP Document	24
Reading an Existing SOAP Document	24
Using SOAP XML Text	25

56 SQL Class

Understanding SQL Class	1
Using Record Class SQL	2
Creating a SQL Definition	2
Binding and Executing of SQL Statements	3
Fetching From a SELECT	4
Using Array of Any for Bind Values or Fetch Results	4
Reusing a Cursor	5
Using the ReuseCursor Property	5
Reusing a Cursor Without the ReuseCursor Property	6
Understanding SQL Objects and Application Engine Programs	7
Declaring a SQL Object	8
Scope of an SQL Object	8
SQL Class Built-in Functions	8
SQL Class Methods	8
Close method: SQL class	8
Execute method: SQL class	9
Fetch method: SQL class	11
Open method: SQL class	13
SQL Class Properties	14
BulkMode property: SQL class	14
IsOpen property: SQL class	15
LTrim property: SQL class	16
ReuseCursor property: SQL class	16
RowsAffected property: SQL class	17

Status property: SQL class	17
TraceName property: SQL class	18
Value property: SQL class	19

57 Tile Wizard and Other Tile Classes

Understanding the Tile Wizard Classes	1
Understanding Other Tile Classes	1
Understanding Application Class Tile Content	2
Tile Title	3
Tile Content	3
Live Data	4
Trend Image	4
Badge Data	4
Example of Tile Content	5
Implementing an Application Class for Tile Content	6
Properties and Methods Required by Tile Content Type	7
Tile Class Methods	8
AddContentHTML method: Tile class	8
AddContentText method: Tile class	9
getAmountFormattedValue method: Tile class	10
getTileLiveData method: Tile class	10
SetTileContentAsChart method: Tile class	11
SetTileContentAsChartAndKPI method: Tile class	11
SetTileContentAsHTML method: Tile class	12
SetTileContentAsImage method: Tile class	13
SetTileContentAsOneKPI method: Tile class	13
SetTileContentAsTwoKPIs method: Tile class	14
SetTileContentAsTwoKPIsTopBottom method: Tile class	14
setTileContentOption method: Tile class	15
setTileHasCount method: Tile class	15
setTileID method: Tile class	16
setTileImageRef method: Tile class	16
setTileLiveData method: Tile class	17
Tile method: Tile class	18
Tile Class Properties	18
GroupletIDStyleClass property: Tile class	18
hasContent property: Tile class	19
hasLiveDataCount property: Tile class	19
hasLiveDataDescr property: Tile class	20
hasLivedataTrendImage property: Tile class	20
ImageReferenceField property: Tile class	21

IncludeSourceInURL property: Tile class	22
IsButtonRole property: Tile class	22
IsDynamic property: Tile class	22
IsNotTile property: Tile class	22
isTileLiveData_1_Metrics property: Tile class	23
isTileLiveData_1_MetricsLabel property: Tile class	23
isTileLiveData_2_Metrics property: Tile class	23
isTileLiveData_2_MetricsLabel property: Tile class	24
isTileLiveData_3_Metrics property: Tile class	24
isTileLiveData_3_MetricsLabel property: Tile class	25
LabelLong property: Tile class	25
PreferencesUrl property: Tile class	25
PreferencesUrlLabel property: Tile class	26
StyleClasses property: Tile class	26
StyleSheets property: Tile class	26
Tilechart property: Tile class	26
TileContentOption property: Tile class	27
TileHtmlArea property: Tile class	27
TileHtmlAreaStyle property: Tile class	28
TileID property: Tile class	28
TileImageReferenceLabel property: Tile class	28
TileKPI_1 property: Tile class	29
TileKPI_1_Label property: Tile class	30
TileKPI_2 property: Tile class	30
TileKPI_2_Label property: Tile class	30
TileKPI_2_Layout property: Tile class	31
TileLiveData_1 property: Tile class	31
TileLiveData_2 property: Tile class	32
TileLiveData_3 property: Tile class	32
TileSpecificStyleSheet property: Tile class	33
TileTransCount property: Tile class	33
TrendImage property: Tile class	33
UseAltText property: Tile class	34
ImageTile Class Methods	34
AddToHomePage method: ImageTile class	34
Delete method: ImageTile class	36
ImageTile method: ImageTile class	36
Publish method: ImageTile class	37
Save method: ImageTile class	38
ImageTile Class Properties	39
AlternateHeight property: ImageTile class	40
AlternateWidth property: ImageTile class	40

Description property: ImageTile class	40
DisableHotspot property: ImageTile class	41
DisplayMode property: ImageTile class	41
EventName property: ImageTile class	41
Height property: ImageTile class	42
ImageName property: ImageTile class	42
IsAuthorAccess property: ImageTile class	42
IsAutosize property: ImageTile class	43
IsInteractive property: ImageTile class	43
IsPublic property: ImageTile class	43
IsPublished property: ImageTile class	43
IsResizable property: ImageTile class	44
ModalParameters property: ImageTile class	44
Name property: ImageTile class	44
Owner property: ImageTile class	45
ParentFolder property: ImageTile class	45
Permissions property: ImageTile class	45
RefreshFrequency property: ImageTile class	45
Roles property: ImageTile class	46
ShowingSequence property: ImageTile class	46
TargetCrefName property: ImageTile class	46
Title property: ImageTile class	47
UseInDashboard property: ImageTile class	47
UseInHomePage property: ImageTile class	47
UseInNavBar property: ImageTile class	48
Width property: ImageTile class	48
FreeTextTile Class Methods	48
FreeTextTile method: FreeTextTile class	48
FreeTextTile Class Properties	49
Content property: FreeTextTile class	50
TileAppFilter Class Methods	50
IsTileVisible method: TileAppFilter class	50

58 TransformData Class

Understanding the TransformData Class	1
Creating a TransformData Object	1
TransformData Class Properties	1
DestMsgName property: TransformData class	1
DestMsgVersion property: TransformData class	2
DestNode property: TransformData class	2
RejectTransform property: TransformData class	2

RoutingDefnName property: TransformData class	2
SourceMsgName property: TransformData class	2
SourceMsgVersion property: TransformData class	3
SourceNode property: TransformData class	3
Status property: TransformData class	3
XmlDoc property: TransformData class	3

59 Tree Classes

Understanding Tree Classes	1
Relationships Between Different Tree Classes	2
Collections in the Tree Classes	4
Error Handling With Trees	4
Leaves and Nodes Insert Verification	5
Restrictions on Trees When Used as a SmartNavigation Data Source	6
Data Types for Tree Objects	6
Scope of the Tree Objects	7
Tree Classes Implementation	7
Tree Classes Reference	10
Session Class Methods	10
GetTree method: Session class	10
GetTreeStructure method: Session class	11
Branch Collection	11
Branch Collection Property	11
Count property: Branch collection	12
Leaf Class	12
Leaf Class Methods	12
Cut method: Leaf class	12
Delete method: Leaf class	13
DeleteByRange method: Leaf class	13
GenABNMenuElement method: Leaf class	14
GenABNMenuElementWithImage method: Leaf class	14
InsertDynSib method: Leaf class	15
InsertSib method: Leaf class	16
LoadABNChart method: Leaf class	17
LoadABNChartOrdered method: Leaf class	17
MoveAsChild method: Leaf class	18
MoveAsChildByName method: Leaf class	19
MoveAsSib method: Leaf class	20
MoveAsSibByRange method: Leaf class	20
PasteSib method: Leaf class	21
RefreshDescription method: Leaf class	22

UpdateRanges method: Leaf class	22
Leaf Class Properties	23
Description property: Leaf class	23
DisplayLevelNumber property: Leaf class	23
Dynamic property: Leaf class	23
HasNextSib property: Leaf class	24
HasPrevSib property: Leaf class	24
ImageName property: Leaf class	24
IsChanged property: Leaf class	24
IsCut property: Leaf class	24
IsDeleted property: Leaf class	25
IsInserted property: Leaf class	25
NextSib property: Leaf class	25
Parent property: Leaf class	25
PrevSib property: Leaf class	26
RangeFrom property: Leaf class	26
RangeTo property: Leaf class	26
TreeBranchName property: Leaf class	26
TreeEffDt property: Leaf class	26
TreeName property: Leaf class	27
TreeSetId property: Leaf class	27
TreeUserKeyValue property: Leaf class	27
Level Collection	27
Level Collection Methods	27
Add method: Level collection	27
Item method: Level collection	28
Remove method: Level collection	28
Level Collection Properties	29
Count property: Level collection	29
First property: Level collection	29
Last property: Level collection	29
Next property: Level collection	29
Level Class	29
Level Class Methods	30
Create method: Level class	30
Level Class Properties	30
AllValuesAudit property: Level class	30
Description property: Level class	30
Name property: Level class	31
Number property: Level class	31
TreeBranchName property: Level class	31
TreeEffDt property: Level class	31

TreeName property: Level class	31
TreeSetId property: Level class	32
TreeUserKeyValue property: Level class	32
Node Class	32
Node Class Methods	32
Branch method: Node class	32
Cut method: Node class	33
Delete method: Node class	33
DeleteByName method: Node class	34
Expand method: Node class	34
GenABNMenuElement method: Node class	35
GenABNMenuElementWithImage method: Node class	35
GenBreadCrumbs method: Node class	36
GenRelatedActions method: Node class	37
InsertChildLeaf method: Node class	38
InsertChildNode method: Node class	39
InsertChildRecord method: Node class	39
InsertDynChildLeaf method: Node class	40
InsertSib method: Node class	41
InsertSibRecord method: Node class	42
LoadABNChart method: Node class	42
LoadABNChartOrdered method: Node class	43
MoveAsChild method: Node class	44
MoveAsChildByName method: Node class	45
MoveAsSib method: Node class	46
MoveAsSibByName method: Node class	46
PasteChild method: Node class	47
PasteSib method: Node class	48
RefreshDescription method: Node class	48
Rename method: Node class	48
SwitchLevel method: Node class	49
Unbranch method: Node class	50
Node Class Properties	50
AllChildCount property: Node class	50
AllChildNodeCount property: Node class	50
ChildLeafCount property: Node class	51
ChildNodeCount property: Node class	51
CollImageName property: Node class	51
Description property: Node class	51
DisplayLevelNumber property: Node class	51
ExpImageName property: Node class	52
FirstChildLeaf property: Node class	52

FirstChildNode property: Node class	52
HasChildLeaves property: Node class	52
HasChildNodes property: Node class	52
HasChildren property: Node class	53
HasNextSib property: Node class	53
HasPrevSib property: Node class	53
IsBranched property: Node class	53
IsChanged property: Node class	53
IsCut property: Node class	54
IsDeleted property: Node class	54
IsInserted property: Node class	54
IsRoot property: Node class	54
LastChildLeaf property: Node class	54
LastChildNode property: Node class	55
LevelNumber property: Node class	55
Name property: Node class	55
NextSib property: Node class	56
Parent property: Node class	56
PrevSib property: Node class	56
State property: Node class	56
TreeBranchName property: Node class	57
TreeEffDt property: Node class	57
TreeName property: Node class	57
TreeSetId property: Node class	57
TreeUserKeyValue property: Node class	58
Type property: Node class	58
Tree Class	58
Tree Class Methods	58
Audit method: Tree class	59
AuditByName method: Tree class	59
Close method: Tree class	60
Copy method: Tree class	61
Create method: Tree class	62
Delete method: Tree class	64
Exists method: Tree class	65
FindLeaf method: Tree class	66
FindNode method: Tree class	67
FindRoot method: Tree class	69
InsertRoot method: Tree class	69
LeafExists method: Tree class	70
LockTree method: Tree class	71
Open method: Tree class	71

OpenAsOfDate method: Tree class	73
OpenForExport method: Tree class	75
OpenWholeTree method: Tree class	76
NodeExists method: Tree class	77
Rename method: Tree class	78
Save method: Tree class	80
SaveAs method: Tree class	80
SaveAsDraft method: Tree class	82
SaveDraft method: Tree class	83
SetImportMode method: Tree class	84
TreeLocksNumber method: Tree class	85
UnlockTree method: Tree class	86
UpdateLock method: Tree class	86
Tree Class Properties	87
AllValues property: Tree class	87
AuditDetails property: Tree class	88
Branches property: Tree class	88
BranchImageName property: Tree class	88
BranchLevel property: Tree class	88
BranchName property: Tree class	89
Category property: Tree class	89
Description property: Tree class	89
DuplicateLeaves property: Tree class	90
EffDt property: Tree class	90
HasDetailRanges property: Tree class	90
HasLockedBranches property: Tree class	91
IsBranched property: Tree class	91
IsChanged property: Tree class	91
IsOpen property: Tree class	92
IsQueryTree property: Tree class	92
IsValid property: Tree class	92
IsVersionChanged property: Tree class	92
IsWholeTree property: Tree class	93
KeyBranchName property: Tree class	93
KeyEffDt property: Tree class	93
KeyName property: Tree class	94
KeySetId property: Tree class	94
KeyUserKeyValue property: Tree class	94
LeafCount property: Tree class	94
LeafImageName property: Tree class	94
LeafOnClipboard property: Tree class	95
LevelCount property: Tree class	95

Levels property: Tree class	95
LevelUse property: Tree class	95
LockOwner property: Tree class	96
LockStatus property: Tree class	96
Name property: Tree class	97
NodeCollImageName property: Tree class	97
NodeCount property: Tree class	98
NodeExpImageName property: Tree class	98
NodeOnClipboard property: Tree class	98
ParentLevel property: Tree class	98
ParentName property: Tree class	98
PerformanceMethod property: Tree class	99
PerformanceSelector property: Tree class	99
PerformanceSelectorOption property: Tree class	100
SetID property: Tree class	100
Status property: Tree class	100
Structure property: Tree class	101
StructureName property: Tree class	101
TreelImageName property: Tree class	101
UserKeyValue property: Tree class	102
UseUpdateReservation property: Tree class	102
Tree Structure Class	102
Tree Structure Class Methods	102
Close method: Tree Structure class	103
Copy method: Tree Structure class	103
Create method: Tree Structure class	103
Delete method: Tree Structure class	104
Open method: Tree Structure class	105
Rename method: Tree Structure class	105
Save method: Tree Structure class	106
Tree Structure Class Properties	106
Description property: Tree Structure class	106
DetailComponent property: Tree Structure class	107
DetailField property: Tree Structure class	107
DetailMenu property: Tree Structure class	107
DetailMenuBar property: Tree Structure class	108
DetailMenuItem property: Tree Structure class	108
DetailMultiNavigate property: Tree Structure class	108
DetailPage property: Tree Structure class	108
DetailRecord property: Tree Structure class	109
IndirectionMethod property: Tree Structure class	109
KeyName property: Tree Structure class	110

LevelComponent property: Tree Structure class	111
LevelMenu property: Tree Structure class	111
LevelMenuBar property: Tree Structure class	111
LevelMenuItem property: Tree Structure class	111
LevelPage property: Tree Structure class	112
LevelRecord property: Tree Structure class	112
Name property: Tree Structure class	112
NodeComponent property: Tree Structure class	113
NodeField property: Tree Structure class	113
NodeMenu property: Tree Structure class	113
NodeMenuBar property: Tree Structure class	113
NodeMenuItem property: Tree Structure class	114
NodeMultiNavigate property: Tree Structure class	114
NodePage property: Tree Structure class	114
NodeRecord property: Tree Structure class	114
NodeUserKeyField property: Tree Structure class	115
SummarySetId property: Tree Structure class	115
SummaryLevelNumber property: Tree Structure class	115
SummaryTreeName property: Tree Structure class	116
SummaryUserKeyValue property: Tree Structure class	116
Type property: Tree Structure class	116
Traverse Tree Hierarchy Example	116

60 Universal Queue Classes

Understanding Universal Queue Classes	1
Scope of the Universal Queue Classes	1
Data Types of the Universal Queue Classes	1
How to Import Universal Queue Classes	2
How to Create a Universal Queue Object	3
Universal Queue Classes Built-in Functions	3
Universal Queue Classes Constructors	3
Agent method: universal queue classes class	3
AgentPhysQueueProps method: universal queue classes class	4
AgentPhysQueueTasks method: universal queue classes class	4
Broadcast method: universal queue classes class	5
LogicalQueue method: universal queue classes class	5
MCFFactory method: universal queue classes class	6
PhysicalQueue method: universal queue classes class	7
Task method: universal queue classes class	7
TaskList method: universal queue classes class	8
Util method: universal queue classes class	10

Agent Class	10
Agent Methods	10
Delete method: Agent class	10
Refresh method: Agent class	11
RefreshQTaskList method: Agent class	12
Agent Properties	12
AgentID property: Agent class	12
AgentProps property: Agent class	13
AgentTasks property: Agent class	13
Buddy property: Agent class	14
Language property: Agent class	14
Name property: Agent class	14
NickName property: Agent class	14
PhysicalQueueID property: Agent class	15
TotalPhysicalQueues property: Agent class	15
AgentPhysQueueProps Class	15
AgentPhysQueueProps Properties	15
AgentID property: AgentPhysQueueProps class	16
PhysicalQueueID property: AgentPhysQueueProps class	16
SkillLevel property: AgentPhysQueueProps class	16
WorkLoad property: AgentPhysQueueProps class	16
AgentPhysQueueTasks Class	16
AgentPhysQueueTasks Method	17
Refresh method: AgentPhysQueueTasks class	17
AgentPhysQueueTasks Properties	17
AcceptedTaskList property: AgentPhysQueueTasks class	17
AssignedTaskList property: AgentPhysQueueTasks class	18
AgentID property: AgentPhysQueueTasks class	18
PhysicalQueueID property: AgentPhysQueueTasks class	18
Broadcast Class	18
Broadcast Class Method	18
Broadcast method: Broadcast class	19
LogicalQueue Class	20
LogicalQueue Properties	20
LogicalQueueID property: LogicalQueue class	20
PhysicalQueueID property: LogicalQueue class	21
MCFFactory Class	21
MCFFactory Property	21
LogicalQueue property: MCFFactory class	21
PhysicalQueue Class	22
PhysicalQueue Methods	22
Refresh method: PhysicalQueue class	22

RefreshTaskList method: PhysicalQueue class	22
PhysicalQueue Properties	23
AcceptedTaskList property: PhysicalQueue class	23
AssignedTaskList property: PhysicalQueue class	23
Agent property: PhysicalQueue class	23
BrowserURL property: PhysicalQueue class	24
EnqueuedTaskList property: PhysicalQueue class	24
EscalatedTaskList property: PhysicalQueue class	24
InternalURL property: PhysicalQueue class	24
IsActive property: PhysicalQueue class	25
LogicalQueueID property: PhysicalQueue class	25
OverflowedTaskList property: PhysicalQueue class	25
PhysicalQueueID property: PhysicalQueue class	26
RENURLID property: PhysicalQueue class	26
TotalAgents property: PhysicalQueue class	26
Task Class	26
Task Methods	26
Close method: Task class	26
Enqueue method: Task class	27
Refresh method: Task class	29
RefreshStatus method: Task class	30
Task Properties	30
AgentID property: Task class	30
ApplicationData property: Task class	30
Comments property: Task class	31
EnqueueTime property: Task class	31
EscalationTime property: Task class	31
Language property: Task class	31
OriginalTime property: Task class	31
OverFlowTime property: Task class	31
PhysicalQueueID property: Task class	32
TiedAgentID property: Task class	32
TaskList Class	32
TaskList Method	32
Refresh method: TaskList class	32
TaskList Properties	32
AgentID property: TaskList class	33
PhysicalQueueID property: TaskList class	33
Task property: TaskList class	33
TaskType property: TaskList class	33
Total property: TaskList class	34
Util Class	34

Util Methods	34
GetLogicalQueue method: Util class	34
GetTimeDiff method: Util class	34
MCFFactory Example	35

61 Workflow Notification Classes

Understanding Notification Classes	1
Scope of the Notification Classes	1
Data Types of the Notification Classes	1
How to Import the Notification Classes	2
How to Create a Notification Object	2
Notification Classes Constructors	3
Notification method: notification classes class	3
NotificationAddress method: notification classes class	4
NotificationTemplate method: notification classes class	5
Worklist method: notification classes class	6
WorklistEntry method: notification classes class	6
WSWorklistEntry method: notification classes class	7
Notification Class	7
Notification Class Import Statements	8
Notification Class Method	8
Send method: Notification class	8
Notification Class Properties	8
ContentType property: Notification class	8
dtmCreated property: Notification class	9
EmailReplyTo property: Notification class	9
FileNames property: Notification class	9
FileTitles property: Notification class	9
language_cd property: Notification class	10
Message property: Notification class	10
NotifyBCC property: Notification class	10
NotifyCC property: Notification class	10
NotifyFrom property: Notification class	11
NotifyGuid property: Notification class	11
NotifyTo property: Notification class	11
Rte property: Notification class	11
SourceComponent property: Notification class	11
SourceMarket property: Notification class	12
SourceMenu property: Notification class	12
Subject property: Notification class	12
Template property: Notification class	12

NotificationAddress Class	12
NotificationAddress Class Properties	12
Channel property: NotificationAddress class	13
Description property: NotificationAddress class	13
EmailId property: NotificationAddress class	13
Language property: NotificationAddress class	13
Oprid property: NotificationAddress class	13
NotificationTemplate Class	13
NotificationTemplate Class Methods	14
GetAndExpandTemplate method: NotificationTemplate class	14
SetupCompVarsAndRcpts method: NotificationTemplate class	15
SetupCompVarsAndRcptsLevel1 method: NotificationTemplate class	16
SetupGenericVars method: NotificationTemplate class	16
NotificationTemplate Class Properties	17
ComponentId property: NotificationTemplate class	17
Instruction property: NotificationTemplate class	17
Language property: NotificationTemplate class	17
Market property: NotificationTemplate class	18
Priority property: NotificationTemplate class	18
Responses property: NotificationTemplate class	18
Subject property: NotificationTemplate class	18
TemplateId property: NotificationTemplate class	18
TemplateType property: NotificationTemplate class	18
Text property: NotificationTemplate class	19
Worklist Class	19
Worklist Class Method	19
Reassign method: WorkList class	19
WorklistEntry Class	20
WorklistEntry Class Methods	20
Create method: WorklistEntry class	20
GetResponseStatus method: WorklistEntry class	21
Reassign method: WorklistEntry class	22
Save method: WorklistEntry class	23
SaveWithCustomData method: WorklistEntry class	24
SelectByKey method: WorklistEntry class	25
SelectByMessageId method: WorklistEntry class	25
Update method: WorklistEntry class	26
WorklistEntry Class Properties	26
actiondtm property: WorklistEntry class	27
busactivity property: WorklistEntry class	27
buseventname property: WorklistEntry class	27
busprocname property: WorklistEntry class	27

commentshort property: WorklistEntry class	27
do_replicate_flag property: WorklistEntry class	27
instanceid property: WorklistEntry class	28
instselecteddtm property: WorklistEntry class	28
inststatus property: WorklistEntry class	28
insttimeoutddtm property: WorklistEntry class	28
instworkeddtm property: WorklistEntry class	28
IsCreatedViaWebService property: WorklistEntry class	29
oprid property: WorklistEntry class	29
originatorid property: WorklistEntry class	29
prevoprid property: WorklistEntry class	29
requestmessageid property: WorklistEntry class	29
ResponseStatus property: WorklistEntry class	29
syncid property: WorklistEntry class	30
timedout property: WorklistEntry class	30
transactionid property: WorklistEntry class	30
url property: WorklistEntry class	30
wl_priority property: WorklistEntry class	31
wldaystoselect property: WorklistEntry class	31
wldaystowork property: WorklistEntry class	31
worklistname property: WorklistEntry class	31
WSWorklistEntry Class	31
WSWorklistEntry Class Methods	31
OnError method: WSWorklistEntry class	32
OnNotify method: WSWorklistEntry class	32
WSWorklistEntry Class Properties	33
InstanceID property: WSWorklistEntry class	33
TransactionID property: WSWorklistEntry class	33
Notification Classes Examples	33
Creating a WorklistEntry	33
Updating a WorklistEntry	35

62 XmlDoc Classes

Understanding XmlDoc Classes	1
When to Use an XmlDoc Object	1
XmlDoc Object Creation	2
Considerations Using a Unique Namespace	2
Considerations Using Rowsets	3
XmlNode Class Considerations	4
Accessing and Traversing an XmlNode Object	4
Error Handling	5

SOAPDoc Object Considerations	5
Scope of XmlDocument and XmlNode Objects	6
Data Type of an XmlDocument or XmlNode Object	6
XmlDoc Classes Built-in Functions	6
XmlDoc Class Methods	6
CopyRowset method: XmlDocument class	7
CopyToPSFTMessage method: XmlDocument class	8
CopyToRowset method: XmlDocument class	9
CreateDocumentElement method: XmlDocument class	11
CreateDocumentType method: XmlDocument class	12
GenFormattedXmlString method: XmlDocument class	14
GenXmlFile method: XmlDocument class	15
GenXmlString method: XmlDocument class	15
GetElementsByTagName method: XmlDocument class	16
LoadIBContent method: XmlDocument class	17
ParseXmlFromURL method: XmlDocument class	19
ParseXmlString method: XmlDocument class	21
XmlDoc Properties	22
DocumentElement property: XmlDocument class	22
IsNull property: XmlDocument class	22
XmlNode Class	22
XmlNode Class Methods	22
AddAttribute method: XmlNode class	22
AddAttributeNS method: XmlNode class	24
AddCDATASection method: XmlNode class	25
AddComment method: XmlNode class	26
AddElement method: XmlNode class	27
AddElementNS method: XmlNode class	28
AddEntityReference method: XmlNode class	29
AddNode method: XmlNode class	30
AddProcessInstruction method: XmlNode class	30
AddText method: XmlNode class	31
CopyNode method: XmlNode class	32
FindNode method: XmlNode class	34
FindNodes method: XmlNode class	35
GenXmlString method: XmlNode class	36
GetAttributeName method: XmlNode class	36
GetAttributeValue method: XmlNode class	37
GetCDATAValue method: XmlNode class	38
GetCDATAValues method: XmlNode class	38
GetChildNode method: XmlNode class	39
GetElement method: XmlNode class	40

GetElements method: XmlNode class	41
GetElementsByTagName method: XmlNode class	42
GetElementsByTagNameNS method: XmlNode class	43
InsertCDATASection method: XmlNode class	44
InsertComment method: XmlNode class	45
InsertElement method: XmlNode class	47
InsertElementNS method: XmlNode class	48
InsertEntityReference method: XmlNode class	49
InsertNode method: XmlNode class	50
InsertProcessInstruction method: XmlNode class	52
InsertText method: XmlNode class	53
RemoveAllChildNode method: XmlNode class	54
RemoveChildNode method: XmlNode class	55
XmlNode Class Properties	57
AttributesCount property: XmlNode class	57
ChildNodeCount property: XmlNode class	57
Index property: XmlNode class	58
IsNull property: XmlNode class	58
LocalName property: XmlNode class	58
NamespaceURI property: XmlNode class	58
NextSibling property: XmlNode class	59
NodeName property: XmlNode class	59
NodePath property: XmlNode class	59
NodeType property: XmlNode class	59
NodeValue property: XmlNode class	60
ParentNode property: XmlNode class	60
Prefix property: XmlNode class	60
PreviousSibling property: XmlNode class	60
Using the XmlDocumentFactory Class	60
XmlDocFactory Class Methods	61
GetNextXmlDoc method: XmlDocumentFactory class	61
SetNamespaceString method: XmlDocumentFactory class	63
SetStringToParse method: XmlDocumentFactory class	64

63 Quick Reference for PeopleCode Classes

PeopleCode Syntax Quick Reference	1
Desupported Items and PeopleCode No Longer Supported	3
Desupported Products and Classes	3
Desupported Functions, Methods, and Properties	5
Chart Items No Longer Supported	8
Desupported BI Publisher Items	8

BI Publisher Items No Longer Supported	9
Desupported Mobile Application Platform Items	15
Desupported Messaging PeopleCode Functions, Methods and Properties	21
Functions No Longer Supported	24
Desupported Built-in Functions from Prior to PeopleTools 8.0	25
Mapping PeopleTools 8.1 Objects to New Objects	26

Preface

Understanding the PeopleSoft Online Help and PeopleBooks

The PeopleSoft Online Help is a website that enables you to view all help content for PeopleSoft applications and PeopleTools. The help provides standard navigation and full-text searching, as well as context-sensitive online help for PeopleSoft users.

Hosted PeopleSoft Online Help

You can access the hosted PeopleSoft Online Help on the [Oracle Help Center](#). The hosted PeopleSoft Online Help is updated on a regular schedule, ensuring that you have access to the most current documentation. This reduces the need to view separate documentation posts for application maintenance on My Oracle Support. The hosted PeopleSoft Online Help is available in English only.

To configure the context-sensitive help for your PeopleSoft applications to use the Oracle Help Center, see *Configuring Context-Sensitive Help Using the Hosted Online Help*.

Locally Installed PeopleSoft Online Help

If you're setting up an on-premises PeopleSoft environment, and your organization has firewall restrictions that prevent you from using the hosted PeopleSoft Online Help, you can install the online help locally. Installable PeopleSoft Online Help is made available with selected PeopleSoft Update Images and with PeopleTools releases for on-premises installations, through the [Oracle Software Delivery Cloud](#).

Your installation documentation includes a chapter with instructions for how to install the online help for your business environment. The documentation zip file may contain a README.txt file with additional installation instructions. See *PeopleSoft 9.2 Application Installation* for your database platform, "Installing PeopleSoft Online Help."

Installable PeopleSoft Online Help now includes PDF versions of each PeopleBook. For more information, see *Understanding Locally Installed PeopleSoft Online Help*.

Downloadable PeopleBook PDF Files

You can access downloadable PDF versions of the help content in the traditional PeopleBook format on the [Oracle Help Center](#). The content in the PeopleBook PDFs is the same as the content in the PeopleSoft Online Help, but it has a different structure and it does not include the interactive navigation features that are available in the online help.

Common Help Documentation

Common help documentation contains information that applies to multiple applications. The three main types of common help are:

- Application Fundamentals
- Using PeopleSoft Applications
- Using and Managing the PeopleSoft Online Help

Most product families provide a set of application fundamentals help topics that discuss essential information about the setup and design of your system. This information applies to many or all applications in the PeopleSoft product family. Whether you are implementing a single application, some combination of applications within the product family, or the entire product family, you should be familiar with the contents of the appropriate application fundamentals help. They provide the starting points for fundamental implementation tasks.

In addition, the *PeopleTools: Applications User's Guide* introduces you to the various elements of the PeopleSoft Pure Internet Architecture. It also explains how to use the navigational hierarchy, components, and pages to perform basic functions as you navigate through the system. While your application or implementation may differ, the topics in this user's guide provide general information about using PeopleSoft applications.

Finally, *Using and Managing the PeopleSoft Online Help* (this guide) introduces you to the setup, features, and usage of the online help system.

Field and Control Definitions

PeopleSoft documentation includes definitions for most fields and controls that appear on application pages. These definitions describe how to use a field or control, where populated values come from, the effects of selecting certain values, and so on. If a field or control is not defined, then it either requires no additional explanation or is documented in a common elements section earlier in the documentation. For example, the Date field rarely requires additional explanation and may not be defined in the documentation for some pages.

Typographical Conventions

The following table describes the typographical conventions that are used in the online help.

Typographical Convention	Description
<u>Key+Key</u>	Indicates a key combination action. For example, a plus sign (+) between keys means that you must hold down the first key while you press the second key. For <u>Alt+W</u> , hold down the <u>Alt</u> key while you press the <u>W</u> key.
. . . (ellipses)	Indicate that the preceding item or series can be repeated any number of times in PeopleCode syntax.
{ } (curly braces)	Indicate a choice between two options in PeopleCode syntax. Options are separated by a pipe ().
[] (square brackets)	Indicate optional items in PeopleCode syntax.
& (ampersand)	When placed before a parameter in PeopleCode syntax, an ampersand indicates that the parameter is an already instantiated object. Ampersands also precede all PeopleCode variables.

Typographical Convention	Description
⇒	This continuation character has been inserted at the end of a line of code that has been wrapped at the page margin. The code should be viewed or entered as a single, continuous line of code without the continuation character.

ISO Country and Currency Codes

PeopleSoft Online Help topics use International Organization for Standardization (ISO) country and currency codes to identify country-specific information and monetary amounts.

ISO country codes may appear as country identifiers, and ISO currency codes may appear as currency identifiers in your PeopleSoft documentation. Reference to an ISO country code in your documentation does not imply that your application includes every ISO country code. The following example is a country-specific heading: "(FRA) Hiring an Employee."

The PeopleSoft Currency Code table (CURRENCY_CD_TBL) contains sample currency code data. The Currency Code table is based on ISO Standard 4217, "Codes for the representation of currencies," and also relies on ISO country codes in the Country table (COUNTRY_TBL). The navigation to the pages where you maintain currency code and country information depends on which PeopleSoft applications you are using. To access the pages for maintaining the Currency Code and Country tables, consult the online help for your applications for more information.

Region, Country, and Industry Identifiers

Information that applies only to a specific region or industry is preceded by a standard identifier in parentheses. This identifier typically appears at the beginning of a section heading, but it may also appear at the beginning of a note or other text.

An example of a region-specific heading is: "(Latin America) Setting Up Depreciation"

Region Identifiers

Regions are identified by the region name. The following are examples of region identifiers that may appear in PeopleSoft Online Help:

- Asia Pacific
- Europe
- Latin America
- North America

Country Identifiers

Countries are identified by a three-letter country code. The following are examples of country identifiers that may appear in the PeopleSoft Online Help:

- ARG (Argentina)
- AUS (Australia)
- CAN (Canada)
- NLD (The Netherlands)

Industry Identifiers

Industries are identified by the industry name or by an abbreviation for that industry. The following are examples of industry identifiers that may appear in the PeopleSoft Online Help:

- USF (U.S. Federal)
- E&G (Education and Government)

Translations and Embedded Help

PeopleSoft 9.2 software applications include translated embedded help. With the 9.2 release, PeopleSoft aligns with the other Oracle applications by focusing our translation efforts on embedded help. We are not planning to translate our traditional online help and PeopleBooks documentation. Instead we offer very direct translated help at crucial spots within our application through our embedded help widgets. Additionally, we have a one-to-one mapping of application and help translations, meaning that the software and embedded help translation footprint is identical—something we were never able to accomplish in the past.

Using and Managing the PeopleSoft Online Help

Select About This Help in the left navigation panel on any page in the PeopleSoft Online Help to see information on the following topics:

- Using the PeopleSoft Online Help.
- Managing hosted Online Help.
- Managing locally installed PeopleSoft Online Help.

PeopleTools Related Links

[PeopleSoft 8.63 Home Page](#)

[PeopleSoft Search and Insights Home Page](#)

[PeopleSoft Online Help](#)

[PeopleSoft Information Portal](#)

[PeopleSoft Spotlight Series](#)

[PeopleSoft Training and Certification | Oracle University](#)

[My Oracle Support](#)

[Oracle Help Center](#)

Contact Us

Send your suggestions to psoft-infodev_us@oracle.com.

Please include the applications update image or PeopleTools release that you're using.

Follow Us

Icon	Link
	Watch PeopleSoft on YouTube
	Follow @PeopleSoft_Info on X.
	Read PeopleSoft Blogs
	Connect with PeopleSoft on LinkedIn

1

Activity Guide Classes

Understanding the Activity Guide Classes

Activity guides are a PeopleTools feature that allow you to define guided procedures for a user or group of users to complete. Users are presented with a list of actions, or tasks, that need to be completed to finish the procedure. The activity guide classes documented in these topics provide you with a programmatic interface to manage and manipulate activity guide templates, activity guide instances, action items, participants, and so on. In addition, some of these activity guide classes can be used to customize and extend your implementation of activity guides.

Related Topics

- Portal Technology: Understanding Activity Guides
- Portal Technology: Enhancing Activity Guides

Importing Activity Guide Classes

The activity guide classes are application classes, not built-in classes, like Rowset, Field, Record, and so on. Before you can use these classes in your PeopleCode program, you must import them into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

Activity Guide Classes Reference

This reference section documents the following classes from the PTAI_ACTION_ITEMS application package:

- List class
- ActionItem class
- Member class
- ContextData class

List Class

This section provides an overview of the List class and discusses:

- List class methods.
- List class properties.

The List class is used to manage an activity guide template or an activity guide instance.

Typically, activity guides are defined by the properties and characteristics of activity guide templates. An *activity guide template* provides a reusable definition of the important aspects of an activity guide: its properties, participants, contextual data, list of action items and to whom they are assigned, and so on. Then, at run time, an *activity guide instance* can be created from the definitions stored in the template. The instance will be generated with the contextual data that uniquely differentiates one instance from another. For example, for a benefits enrollment activity guide, the contextual data would likely include the employee ID, the country and locale (state, province, and so on) where the employee works, and any other key data required to initiate the benefits process.

Related Topics

- Portal Technology: Activity Guide Templates and Instances
- Portal Technology: Creating and Maintaining Activity Guide Templates
- Portal Technology: Managing Activity Guide Instances

List Class Methods

In this section, the List class methods are presented in alphabetical order.

createInstance method: List class

Syntax

```
createInstance(instance_ID, title, &context_data)
```

Description

Use this method to create an activity guide instance by cloning the current activity guide template including its action items, participants, and so on.

Parameters

Parameter	Description
<i>instance_ID</i>	Specifies the ID for the activity guide instance as a string.
<i>title</i>	Specifies the title for the activity guide instance as a string. Note: The title is also referred to as the Label property.
<i>&context_data</i>	Specifies the contextual data for the activity guide instance as a PTAI_COLLECTION:Collection object.

Returns

A List object.

Example

This is a code example of the CreateInstance method:

```

method CreateInstFromCtxtData
    /* &OCtxt as PTAI_COLLECTION:Collection */
    /* Returns String */
    Local PTAI_ACTION_ITEMS:ContextData &ctxData;
    Local PTAI_ACTION_ITEMS:List &newList = create PTAI_ACTION_ITEMS:List();
    Local PTAI_COLLECTION:Collection &ctxDataColl = create
PTAI_COLLECTION:Collection();
    Local integer &i, &nbr;
    Local string &label, &descr, &InstanceId;
    try
        For &i = 1 To &OCtxt.Count
            &ctxData = (&OCtxt.Item(&i) As PTAI_ACTION_ITEMS:ContextData);
            If &ctxData.ctxKey And
                &ctxData.keyValue = "" Then
                Return "";
            End-If;
            &ctxDataColl.InsertItem(&ctxData);
        End-For;
        &newList.open(&Template_Id);
        SQLExec(SQL.PTAI_GET_INSTANCES, &newList.ListId, &nbr);
        &nbr = &nbr + 1;
        &label = &newList.Label | "-" | &nbr;
        &InstanceId = &newList.createInstance(&label, &newList.DescrLong,
&ctxDataColl).ListId;
        Return &InstanceId;
    catch Exception &e
        Return "";
    end-try;
end-method;

```

Related Topics

- [Label property: List class](#)
- [ListId property: List class](#)
- [ContextData Class](#)

This section provides an overview of the ContextData class and discusses:

getActionItems method: List class

Syntax

```
getActionItems()
```

Description

Use this method to return an array of *all* action item IDs for the current activity guide. This method returns IDs for both summary and detail action items.

Parameters

None.

Returns

An array of string.

Related Topics

- [getRootItems method: List class](#)
- [ActionItem Class](#)

This section provides an overview of the ActionItem class and discusses:

GetContext method: List class

Syntax

```
GetContext()
```

Description

Use this method to get the contextual data for the current activity guide.

Parameters

None.

Returns

A PTAI_COLLECTION:Collection object.

Related Topics

- [ContextData Class](#)

This section provides an overview of the ContextData class and discusses:

getMembers method: List class

Syntax

```
getMembers()
```

Description

Use this method to return a PTAI_COLLECTION:Collection object representing participants for the current activity guide.

Parameters

None.

Returns

A PTAI_COLLECTION:Collection object.

Related Topics

- [Member Class](#)

This section provides an overview of the Member class and discusses:

GetPglBtn method: List class

Syntax

```
GetPglBtn()
```

Description

Use this method to return a `PTAI_COLLECTION:Collection` representing the definitions for custom navigation frame buttons for the current activity guide.

Parameters

None.

Returns

A `PTAI_COLLECTION:Collection` object.

getRootItems method: List class

Syntax

```
getRootItems()
```

Description

Use this method to return an array of action item IDs for summary action items for the current activity guide.

Note

This method does not return IDs for detail action items.

Parameters

None.

Returns

An array of string.

Related Topics

- [getActionItems method: List class](#)
- [ActionItem Class](#)

This section provides an overview of the ActionItem class and discusses:

new method: List class

Syntax

```
new(ID, portal, title)
```

Description

Use this method to generate a new activity guide.

Parameters

Parameter	Description
<i>ID</i>	Specifies the ID for the new activity guide as a string.
<i>portal</i>	Specifies a portal for the activity guide as a string.
<i>title</i>	Specifies the title for the activity guide as a string. Note: The title is also referred to as the Label property.

Returns

None.

Related Topics

- [Label property: List class](#)
- [ListId property: List class](#)

open method: List class

Syntax

```
open(ID)
```

Description

Use this method to retrieve an activity guide definition from the database and sets all the properties.

Parameters

Parameter	Description
<i>ID</i>	Specifies the activity guide ID as a string.

Returns

None.

Related Topics

- [ListId property: List class](#)

save method: List class

Syntax

save()

Description

Use this method to save the current activity guide definition to the database. If this is a new activity guide, then the definition is inserted into the database; otherwise, an existing definition is updated in the database.

Parameters

None.

Returns

A Boolean value: True if the save is successful, False otherwise.

SaveContext method: List class

Syntax

SaveContext(&context_data)

Description

Use this method to save the contextual data for the current activity guide to the database. Any existing contextual data for this activity guide definition is deleted from the database first.

Parameters

Parameter	Description
<i>&context_data</i>	Specifies the contextual data for the activity guide as a PTAI_COLLECTION:Collection object.

Returns

None.

Related Topics

- [ContextData Class](#)
This section provides an overview of the ContextData class and discusses:

saveMembers method: List class

Syntax

```
saveMembers(&members)
```

Description

Use this method to save the participants (members) for the current activity guide to the database. Any existing participants for this activity guide definition are deleted from the database first.

Parameters

Parameter	Description
<i>&members</i>	Specifies the participants for the activity guide as a PTAI_COLLECTION:Collection object.

Returns

None.

Related Topics

- [Member Class](#)
This section provides an overview of the Member class and discusses:

SavePgltBtn method: List class

Syntax

```
SavePgltBtn(&pgltBtns)
```

Description

Use this method to save the definitions for the custom navigation frame buttons for the current activity guide to the database. Any existing custom button definitions for this activity guide are deleted from the database first.

Parameters

Parameter	Description
<i>&pgltBtns</i>	Specifies the custom navigation frame buttons for the activity guide as a PTAI_COLLECTION:Collection object.

Returns

A PTAI_COLLECTION:Collection object.

List Class Properties

In this section, the List class properties are presented in alphabetical order.

AppClassID property: List class

Description

Use this property to set or return a string value representing the name of the application class that contains the method to be invoked at activity guide instance creation.

Note

The full path to the method is constructed from four properties: PackageRoot, QualifyPath, AppClassID, and AppClassMethod

This property is read/write.

Related Topics

- [AppClassMethod property: List class](#)
- [PackageRoot property: List class](#)
- [QualifyPath property: List class](#)
- Portal Technology: Defining Advanced Options
- Portal Technology: Initializing an Activity Guide Instance

AppClassMethod property: List class

Description

Use this property to set or return a string value representing the name of the method to be invoked at activity guide instance creation.

Note

The full path to the method is constructed from four properties: PackageRoot, QualifyPath, AppClassID, and AppClassMethod

This property is read/write.

Related Topics

- [AppClassID property: List class](#)
- [PackageRoot property: List class](#)
- [QualifyPath property: List class](#)
- Portal Technology: Defining Advanced Options

- Portal Technology: Initializing an Activity Guide Instance

DescrLong property: List class

Description

Use this property to set or return the description for the activity guide as a string value.

This property is read/write.

Related Topics

- Portal Technology: Defining Activity Guide Template Properties

Field1 property: List class

Description

Use this property to set or return a string value representing the label for the first configurable text field.

This property is read/write.

Related Topics

- Portal Technology: Defining Advanced Options

Field10 property: List class

Description

Use this property to set or return a string value representing the label for the fifth configurable yes/no field.

This property is read/write.

Related Topics

- Portal Technology: Defining Advanced Options

Field2 property: List class

Description

Use this property to set or return a string value representing the label for the second configurable text field.

This property is read/write.

Related Topics

- Portal Technology: Defining Advanced Options

Field3 property: List class

Description

Use this property to set or return a string value representing the label for the third configurable text field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field4 property: List class

Description

Use this property to set or return a string value representing the label for the fourth configurable text field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field5 property: List class

Description

Use this property to set or return a string value representing the label for the fifth configurable text field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field6 property: List class

Description

Use this property to set or return a string value representing the label for the first configurable yes/no field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field7 property: List class

Description

Use this property to set or return a string value representing the label for the second configurable yes/no field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field8 property: List class

Description

Use this property to set or return a string value representing the label for the third configurable yes/no field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

Field9 property: List class

Description

Use this property to set or return a string value representing the label for the fourth configurable yes/no field.

This property is read/write.

Related Topics

- [Portal Technology: Defining Advanced Options](#)

HomeUrl property: List class

Description

Use this property to set or return a string value representing the URL for the WorkCenter page (or starting page) that incorporates this activity guide. This URL provides access from the Activity Guides - In Progress homepage pagelet to the WorkCenter page.

This property is read/write.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)
- [Portal Technology: Accessing Instances from the Activity Guides - In Progress Pagelet](#)

isActive property: List class

Description

Use this property to set or return a Boolean value indicating whether the activity guide is active.

This property is read/write.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)

IsTemplate property: List class

Description

Use this property to set or return a Boolean value indicating whether the activity guide is a template. When this property is False, the List object is an activity guide instance.

This property is read/write.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)

Label property: List class

Description

Use this property to set or return a string representing the descriptive name (or title) of the activity guide.

This property is read/write.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)

ListId property: List class

Description

Use this property to return a string representing the ID for this activity guide.

This property is read-only.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)

NewWindow property: List class

Description

Use this property to set or return a Boolean value indicating whether the New Window option is enabled for activity guide.

This property is read/write.

Related Topics

- [Portal Technology: Defining Activity Guide Template Properties](#)

PackageRoot property: List class

Description

Use this property to set or return a string value representing the name of the application package that contains the method to be invoked at activity guide instance creation.

Note

The full path to the method is constructed from four properties: PackageRoot, QualifyPath, AppClassID, and AppClassMethod

This property is read/write.

Related Topics

- [AppClassID property: List class](#)
- [AppClassMethod property: List class](#)
- [QualifyPath property: List class](#)
- Portal Technology: Defining Advanced Options
- Portal Technology: Initializing an Activity Guide Instance

ParentTemplate property: List class

Description

Use this property to set or return a string representing the ID of the template used to generate the activity guide instance. If the List object represents an activity guide template, then this property will be Null.

Related Topics

- Portal Technology: Creating New Activity Guide Instances Manually

pglAppClass property: List class

Description

Use this property to set or return a string representing the name of the application class that contains the method (or methods) to be invoked to create custom navigation frame buttons.

Note

The full path to the method is constructed from three properties: pglPackageRoot, pglQualifyPath, and pglAppClass.

This property is read/write.

Related Topics

- [GetPglBtn method: List class](#)
- [SavePglBtn method: List class](#)
- [pglPackageRoot property: List class](#)
- [pglQualifyPath property: List class](#)
- Portal Technology: Defining Navigation and Pagelet Options

pgltPackageRoot property: List class

Description

Use this property to set or return a string representing the name of the application package that contains the method (or methods) to be invoked to create custom navigation frame buttons.

Note

The full path to the method is constructed from three properties: `pgltPackageRoot`, `pgltQualifyPath`, and `pgltAppClass`.

This property is read/write.

Related Topics

- [GetPglBtn method: List class](#)
- [SavePglBtn method: List class](#)
- [pgltAppClass property: List class](#)
- [pgltQualifyPath property: List class](#)
- Portal Technology: Defining Navigation and Pagelet Options

pgltProgressBarVisible property: List class

Description

Use this property to set or return a Boolean value indicating whether the progress bar will be displayed in the activity guide pagelet on the WorkCenter page.

This property is read/write.

Related Topics

- Portal Technology: Defining Navigation and Pagelet Options

pgltQualifyPath property: List class

Description

Use this property to set or return a string representing the names of each subpackage in the application class hierarchy that define the location of the application class. Separate subpackage names by a colon. If the class is defined in the top-level application package, use a colon only.

Note

The full path to the method is constructed from three properties: `pgltPackageRoot`, `pgltQualifyPath`, and `pgltAppClass`.

This property is read/write.

Related Topics

- [GetPglBtn method: List class](#)
- [SavePglBtn method: List class](#)
- [pgltAppClass property: List class](#)
- [pgltPackageRoot property: List class](#)
- Portal Technology: Defining Navigation and Pagelet Options

QualifyPath property: List class

Description

Use this property to set or return a string value representing the names of each subpackage in the application class hierarchy that define the location of the application class. Separate subpackage names by a colon. If the class is defined in the top-level application package, use a colon only.

Note

The full path to the method is constructed from four properties: PackageRoot, QualifyPath, AppClassID, and AppClassMethod

This property is read/write.

Related Topics

- [AppClassID property: List class](#)
- [AppClassMethod property: List class](#)
- [PackageRoot property: List class](#)
- Portal Technology: Defining Advanced Options
- Portal Technology: Initializing an Activity Guide Instance

Status property: List class

Description

Use this property to set or return the status of the instance, which determines whether the activity guide is displayed in the Activity Guides - In Progress pagelet. The valid values are:

Value	Description
CA	Cancelled
CP	Complete
IP	In progress

This property is read/write.

Example

In the following example, the method sets the activity guide status to complete:

```
method CompleteStatus
  /* &list_id as String */
  Local PTAI_ACTION_ITEMS:List &ObjList;
  &ObjList = create PTAI_ACTION_ITEMS:List();
  &ObjList.open(&list_id);
  Rem set the status of the template to Complete;

  &ObjList.Status = "CP";
  &return = &ObjList.save();

end-method;
```

ActionItem Class

This section provides an overview of the ActionItem class and discusses:

- ActionItem class methods.
- ActionItem class properties.

The ActionItem class is used to manage action items.

Action items are the tasks that are assigned for completion within an activity guide. As an application developer, you will refer to these as action items. To users, they are presented as tasks or steps.

Action items can be created and maintained within activity guide templates or within activity guide instances. However, typically you will define action items and their details at the template level only. Once an activity guide instance is created, updates to the action items themselves occur programmatically or through actions of the user.

Related Topics

- Portal Technology: Creating and Maintaining Action Items

ActionItem Class Methods

In this section, the ActionItem class methods are presented in alphabetical order.

delete method: ActionItem class

Syntax

```
delete()
```

Description

Use this method to delete the current action item.

Parameters

None.

Returns

A Boolean value: True if the deletion was successful, False otherwise.

getAssignments method: ActionItem class

Syntax

```
getAssignments()
```

Description

Use the `getAssignments` method to obtain the action item assignments (user/role) as a collection object.

Note

While you can specify any user ID or role, only a user or role that has also been assigned Contributor privileges on the template or instance Security page will be allowed to complete the action item. The system will not validate your selection against the users or roles defined on the Security page.

Parameters

None.

Returns

A `PTAI_COLLECTION:Collection` object containing user or role assignments data for the action item.

Example

```
import PTAI_ACTION_ITEMS:ActionItem;
import PTAI_COLLECTION:Collection;

Local PTAI_ACTION_ITEMS:ActionItem &item;
Local PTAI_COLLECTION:Collection &oAssignmentColl = create
PTAI_COLLECTION:Collection();

&item = create PTAI_ACTION_ITEMS:ActionItem();
/*Pass an action item id*/
&item.open(&item_id);
&oAssignmentColl = &item.getAssignments();
```

Related Topics

- [saveAssignments method: ActionItem class](#)

new method: ActionItem class

Syntax

```
new(item_ID, title, list_ID)
```

Description

Use this method to create and initialize a new action item.

Parameters

Parameter	Description
<i>item_ID</i>	Specifies the ID for the new action item as a string.
<i>title</i>	Specifies the title for the new action item as a string. Note: The title is also referred to as the Label property.
<i>list_ID</i>	Specifies the activity guide to which the action item belongs as a string.

Returns

None.

Related Topics

- [ItemId property: ActionItem class](#)
- [Label property: ActionItem class](#)
- [ListId property: ActionItem class](#)

nextAction method: ActionItem class

Syntax

```
nextAction()
```

Description

Use this method to return the next *detail* action item in the activity guide that is assigned and is not cancelled or on hold.

Parameters

None.

Returns

An ActionItem object.

open method: ActionItem class

Syntax

```
open(item_ID)
```

Description

Use this method to retrieve the specified action item definition from the database and set the properties.

Parameters

Parameter	Description
<i>item_ID</i>	Specifies the action item ID as a string.

Returns

None.

Related Topics

- [ItemId property: ActionItem class](#)

prevAction method: ActionItem class

Syntax

```
prevAction()
```

Description

Use this method to return the previous *detail* action item in the activity guide that is assigned and is not cancelled or on hold.

Parameters

None.

Returns

An ActionItem object.

save method: ActionItem class

Syntax

```
save()
```

Description

Use this method to save the current action item definition to the database. If this is a new activity guide, then the definition is inserted into the database; otherwise, an existing definition is updated in the database.

Parameters

None.

Returns

A Boolean value: True if the save is successful, False otherwise.

saveAssignments method: ActionItem class

Syntax

```
saveAssignments(&AssignmentColl)
```

Description

Use the saveAssignments method to save or update action item assignments. If you are adding new user assignments to an action item, use the getAssignments method to get the existing assignments as a collection object, insert new assignments to the returned collection object, and call the saveAssignments method with the updated collection object as input.

Note

While you can specify any user ID or role, only a user or role that has also been assigned Contributor privileges on the template or instance Security page will be allowed to complete the action item. The system will not validate your selection against the users or roles defined on the Security page.

Parameters

Parameter	Description
<i>&AssignmentColl</i>	Specifies the user or role assignment data for the action item as a PTAI_COLLECTION:Collection object.

Returns

None.

Example

```
import PTAI_ACTION_ITEMS:ActionItem;  
import PTAI_COLLECTION:Collection;  
import PTAI_ACTION_ITEMS:ActionItemAssignments;  
import PTAI_COLLECTION:Collectable;
```

```
Local PTAI_ACTION_ITEMS:ActionItem &item;  
Local PTAI_COLLECTION:Collection &oAssignmentColl = create  
PTAI_COLLECTION:Collection();  
Local PTAI_ACTION_ITEMS:ActionItemAssignments &oAssignment = create  
PTAI_ACTION_ITEMS:ActionItemAssignments();  
&oAssignment.AssignType = "USER";  
&oAssignment.AssignValue = %OperatorId;  
  
&oAssignmentColl.InsertItem(&oAssignment As PTAI_COLLECTION:Collectable);  
  
&item = create PTAI_ACTION_ITEMS:ActionItem();  
/*Pass an action item id*/  
&item.open(&item_id);  
&item.saveAssignments(&oAssignmentColl);
```

Related Topics

- [getAssignments method: ActionItem class](#)

ActionItem Class Properties

In this section, the ActionItem class properties are presented in alphabetical order.

AppClassID property: ActionItem class

Description

Use this property to set or return a string value representing the name of the application class that contains the ItemPostProcess method to be invoked for post-processing of this action item.

Note

The full path to the ItemPostProcess method is constructed from three properties: PackageRoot, QualifyPath, and AppClassID

This property is read/write.

Related Topics

- [PackageRoot property: ActionItem class](#)
- [QualifyPath property: ActionItem class](#)
- Portal Technology: Configuring Related Data
- Portal Technology: Performing Pre-Processing for Action Items

AssignedToOprid property: ActionItem class

Description

The AssignedToOprid property is desupported in PeopleTools 8.58 and will be ignored.

Related Topics

- Portal Technology: Defining Action Item Details
- Portal Technology: Defining Activity Guide Template Security

AssignType property: ActionItem class

Description

The AssignType property is desupported in PeopleTools 8.58 and will be ignored.

Related Topics

- Portal Technology: Defining Action Item Details
- Portal Technology: Defining Activity Guide Template Security

CurrentStep property: ActionItem class

Description

Use this property to set or return a Boolean value indicating whether the current step is the active step currently being worked in the activity guide.

This property is read/write.

DescrLong property: ActionItem class

Description

Use this property to set or return the description for the action item as a string value.

This property is read/write.

Related Topics

- Portal Technology: Defining Action Item Details

DueDate property: ActionItem class

Description

Use this property to set or return a Date value representing the date portion of the due date and time.

This property is read/write.

Related Topics

- [DueTm property: ActionItem class](#)
- Portal Technology: Defining Action Item Details

DueTm property: ActionItem class

Description

Use this property to set or return a Time value representing the time portion of the due date and time.

This property is read/write.

Related Topics

- [DueDate property: ActionItem class](#)
- Portal Technology: Defining Action Item Details

EndDttm property: ActionItem class

Description

Use the *EndDttm* property to set the completion of a step or instance in a guided process as a DateTime value.

Note

You can use the EndDttm property only within the context of reporting the duration of step or instance for analytics.

This property is read/write.

Field1 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the first configurable text field to be used in execution of the transaction.

This property is read/write.

Related Topics

- Portal Technology: Configuring Related Data

Field10 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the fifth configurable yes/no field to be used in execution of the transaction.

This property is read/write.

Related Topics

- Portal Technology: Configuring Related Data

Field2 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the second configurable text field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field3 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the third configurable text field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field4 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the fourth configurable text field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field5 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the fifth configurable text field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field6 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the first configurable yes/no field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field7 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the second configurable yes/no field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field8 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the third configurable yes/no field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

Field9 property: ActionItem class

Description

Use this property to set or return a string value representing the application data for the fourth configurable yes/no field to be used in execution of the transaction.

This property is read/write.

Related Topics

- [Portal Technology: Configuring Related Data](#)

ItemId property: ActionItem class

Description

Use this property to return a string representing the ID for this action item.

This property is read-only.

Related Topics

- [Portal Technology: Defining Action Item Details](#)

Label property: ActionItem class

Description

Use this property to set or return a string representing the descriptive name (or title) of the action item.

This property is read/write.

Related Topics

- [Portal Technology: Defining Action Item Details](#)

ListId property: ActionItem class

Description

Use this property to set or return a string value representing the ID for the activity guide containing the current action item.

This property is read/write.

Related Topics

- [ListId property: List class](#)

PackageRoot property: ActionItem class

Description

Use this property to set or return a string value representing the name of the application package that contains the ItemPostProcess method to be invoked for post-processing of this action item.

Note

The full path to the ItemPostProcess method is constructed from three properties: PackageRoot, QualifyPath, and AppClassID

This property is read/write.

Related Topics

- [AppClassID property: ActionItem class](#)
- [QualifyPath property: ActionItem class](#)
- [Portal Technology: Configuring Related Data](#)
- [Portal Technology: Performing Pre-Processing for Action Items](#)

ParentId property: ActionItem class

Description

Use this property to set or return the ID of the summary (or parent) action item. If there is no parent action item, the value returned is ROOT.

This property is read/write.

PercCompl property: ActionItem class

Description

Use this property to set or return a Number value indicating the percentage completion for this action item.

This property is read/write.

Related Topics

- Portal Technology: Defining Action Item Details

Priority property: ActionItem class

Description

Use this property to set or return a string value representing the priority for this action item. The valid values are:

Value	Description
1	Low
2	Medium
3	High

This property is read/write.

QualifyPath property: ActionItem class

Description

Use this property to set or return a string value representing the names of each subpackage in the application class hierarchy that define the location of the application class. Separate subpackage names by a colon. If the class is defined in the top-level application package, use a colon only.

Note

The full path to the ItemPostProcess method is constructed from three properties: PackageRoot, QualifyPath, and AppClassID

This property is read/write.

Related Topics

- [AppClassID property: ActionItem class](#)
- [PackageRoot property: ActionItem class](#)
- Portal Technology: Configuring Related Data
- Portal Technology: Performing Pre-Processing for Action Items

Remarks property: ActionItem class

Description

Use this property to set or return the progress remarks for this action item.

This property is read/write.

Related Topics

- Portal Technology: Configuring Related Data

Required property: ActionItem class

Description

Use this property to set or return a Boolean value indicating whether the action item is required.

This property is read/write.

Related Topics

- Portal Technology: Defining Action Item Details

Sequence property: ActionItem class

Description

Use this property to set or return a Number value representing the sequence number for the action item.

This property is read/write.

Related Topics

- Portal Technology: Understanding Creation and Maintenance of Action Items
- Portal Technology: Defining Action Item Details

ServiceId property: ActionItem class

Description

Use this property to set or return a string value representing the ID for the related content service that will be executed when the user clicks this action item in the activity guide pagelet.

This property is read/write.

Related Topics

- [Type property: ActionItem class](#)

- [Portal Technology: Defining Action Item Details](#)

StartDt property: ActionItem class

Description

Use this property to set or return a Date value representing the date portion of the start date and time.

This property is read/write.

Related Topics

- [StartTm property: ActionItem class](#)
- [Portal Technology: Defining Action Item Details](#)

StartTm property: ActionItem class

Description

Use this property to set or return a Time value representing the time portion of the start date and time.

This property is read/write.

Related Topics

- [StartDt property: ActionItem class](#)
- [Portal Technology: Defining Action Item Details](#)

Status property: ActionItem class

Description

Use this property to set or return a string value representing the status of the current action item. Valid values are:

Value	Description
0	Not assigned
1	Assigned
2	In progress
3	On hold
4	Completed
5	Cancelled

This property is read/write.

Related Topics

- [Portal Technology: Defining Action Item Details](#)

Summary property: ActionItem class

Description

Use this property to set or return a Boolean value indicating whether the action item is a summary action item. When this property is False, the action item is a detail action item.

This property is read/write.

Related Topics

- [Portal Technology: Defining Action Item Details](#)

Type property: ActionItem class

Description

Use this property to set or return a string value representing the type of the related content service that will be executed when the user clicks this action item in the activity guide pagelet. The valid values are:

Value	Description
A	Application class URL
C	PeopleSoft component
N	Non-PeopleSoft URL
Q	PeopleSoft query
S	PeopleSoft script

This property is read/write.

Related Topics

- [ServiceId property: ActionItem class](#)
- [Portal Technology: Defining Action Item Details](#)

ActionItemAssignments Class

This section provides an overview of the ActionItemAssignments class and discusses:

- ActionItemAssignments class methods.
- ActionItemAssignments class properties.

The ActionItemAssignments class is used to manage action item user/role assignments data for action items in an activity guide template and instance. You can use the ActionItemAssignments class properties to create action item assignment object and add/update the action item user or role assignment data.

If you are adding new user assignments to an action item, use the getAssignments method to get the existing assignments as a collection object, insert new assignments to the returned collection object, and call the saveAssignments method with the updated collection object as input.

ActionItemAssignments Class Methods

In this section, the ActionItemAssignments class method is presented:

IsEqual method: ActionItemAssignments class

Syntax

```
IsEqual(&object)
```

Description

Use this method to evaluate the equivalency of an object with the current ActionItemAssignments object. Equivalency is established based on the value of two properties: &AssignType and &AssignValue.

Parameters

Parameter	Description
<i>&object</i>	Specifies the object to be compared as a PTAI_COLLECTION:Collectable object.

Returns

A Boolean value: True if the objects are equivalent, False otherwise.

ActionItemAssignments Class Properties

In this section, the ActionItemAssignments class properties are presented in alphabetic order

AssignType property: ActionItemAssignments class

Description

Use the AssignType property to set or return the assignment as a String. The value can be either USER or ROLE.

This property is read/write.

AssignValue property: ActionItemAssignments class

Description

Use the AssignValue property to set or return the user or role assignment value as a String.

This property is read/write.

Member Class

This section provides an overview of the Member class and discusses:

- Member class methods.
- Member class properties.

The Member class is used to manage activity guide participants.

Related Topics

- [Portal Technology: Defining Activity Guide Template Security](#)

Member Class Methods

In this section, the Member class methods are presented in alphabetical order.

IsEqual method: Member class

Syntax

```
IsEqual(&object)
```

Description

Use this method to evaluate the equivalency of an object with the current member. Equivalency is established based on the value of two properties: the object's Name and the Type.

Parameters

Parameter	Description
<i>&object</i>	Specifies the object to be compared as a PTAI_COLLECTION:Collectable object.

Returns

A Boolean value: True if the objects are equivalent, False otherwise.

Related Topics

- [Name property: Member class](#)
- [Type property: Member class](#)

Member method: Member class

Syntax

```
Member(name, type)
```

Description

Use this constructor method to initialize a Member object with the specified name and type.

Parameters

Parameter	Description
<i>name</i>	Specifies the participant's name as a string value.
<i>type</i>	Specifies the participant type (role or user) as a string value.

Returns

None.

Member Class Properties

In this section, the Member class properties are presented in alphabetical order.

Name property: Member class

Description

Use this property to return the participant's name as a string value.

This property is read-only.

PrivilegeSetID property: Member class

Description

Use this property to set or return the privilege level assigned to this participant as a string value.

This property is read/write.

Example

Set or return a value for the PrivilegeSetID property using the Constants class:

Constant Value	Description
&PTAI_CONSTANTS.PRIVSET_ADMIN	Administrator
&PTAI_CONSTANTS.PRIVSET_CONTRIBUTOR	Contributor
&PTAI_CONSTANTS.PRIVSET_VIEWER	Viewer

For example:

```
import PTAI_ACTION_ITEMS:*
```

```
Local PTAI_ACTION_ITEMS:Constants &PTAI_CONSTANTS;
```

```
Local PTAI_ACTION_ITEMS:Member &member;
```

```
&PTAI_CONSTANTS = create PTAI_ACTION_ITEMS:Constants();
```

```
&member = create PTAI_ACTION_ITEMS:Member(&name, &type);
```

```
&member.PrivilegeSetID = &PTAI_CONSTANTS.PRIVSET_ADMIN;
```

Type property: Member class

Description

Use this property to return the participant type (user or role) as a string value.

This property is read-only.

ContextData Class

This section provides an overview of the ContextData class and discusses:

- ContextData class methods.
- ContextData class properties.

The ContextData class is used to manage contextual data for activity guide templates and instances.

You can define contextual data that will be passed to the activity guide instance when it is created. Contextual data defined as key fields will be used to uniquely identify each activity guide instance. For example, if the employee ID were defined as a key contextual field, then each activity guide instance will be created for a specific employee ID. Contextual data defined as non-key fields is not used to differentiate an instance, but can be passed to the instance nevertheless. For example, non-key data can be displayed in the activity guide pagelet by specifying the Context Visible option for the field. In this way, instead of displaying the employee ID, you could display the employee name in the pagelet.

Related Topics

- Portal Technology: Defining Advanced Options

ContextData Class Methods

In this section, the ContextData class methods are presented in alphabetical order.

ContextData method: ContextData class

Syntax

```
ContextData(rec_name, field_name, label, value, isKey, isVisible)
```

Description

Use this constructor method to initialize one row of contextual data for an activity guide.

Parameters

Parameter	Description
<i>rec_name</i>	Specifies the record name that is the source for the contextual field as a string value.

Parameter	Description
<i>field_name</i>	Specifies the name of the source contextual field as a string value.
<i>label</i>	Specifies an optional label for the contextual field as a string value. This label can be displayed along with the data value in the activity guide pagelet on the WorkCenter page.
<i>value</i>	Specifies the contextual data value as a string.
<i>isKey</i>	Specifies a Boolean value indicating whether the contextual field is a key field.
<i>isVisible</i>	Specifies a Boolean value indicating whether to display the contextual data and labels in the activity guide pagelet on the WorkCenter page.

Returns

None.

IsEqual method: ContextData class

Syntax

`IsEqual(&object)`

Description

Use this method to evaluate the equivalency of an object with the current ContextData object. Equivalency is established based on the value of five properties: `recname`, `fieldname`, `keyLabel`, `keyValue`, and `ctxKey`.

Parameters

Parameter	Description
<i>&object</i>	Specifies the object to be compared as a PTAI_COLLECTION:Collectable object.

Returns

A Boolean value: True if the objects are equivalent, False otherwise.

ContextData Class Properties

In this section, the ContextData class properties are presented in alphabetical order.

ctxKey property: ContextData class

Description

Use this property to set or return a Boolean value indicating whether the contextual field is a key field.

This property is read/write.

ctxVisible property: ContextData class

Description

Use this property to set or return a Boolean value indicating whether to display the contextual data and labels in the activity guide pagelet on the WorkCenter page.

This property is read/write.

fieldname property: ContextData class

Description

Use this property to set or return the name of the source contextual field as a string value.

This property is read/write.

keyLabel property: ContextData class

Description

Use this property to set or return an optional label for the contextual field as a string value. This label can be displayed along with the data value in the activity guide pagelet on the WorkCenter page.

This property is read/write.

keyValue property: ContextData class

Description

Use this property to set or return the contextual data value as a string.

This property is read/write.

recname property: ContextData class

Description

Use this property to set or return the record name that is the source for the contextual field as a string value.

This property is read/write.

2

AESession Class

Understanding the AESession Class

Before PeopleTools 8, users could perform SQL directly on the Application Engine tables, thereby changing their SQL and Application Engine "flow" in a dynamic manner, prior to running their applications. Some applications, for example, let the user input their "rules" in a user-friendly application, then convert these rules, at save time, into Application Engine constructs.

With PeopleTools 8, Application Engine programs should not perform SQL directly on the Application Engine tables, as they are system tables, and are cached. SQL on the Application Engine tables may not be accurately reflected when the applications are executed, because of the caching mechanism.

To overcome this problem, developers have two basic operations that let them modify their Application Engine programs from their online pages:

- Ability to modify SQL definitions, which are referenced within Application Engine SQL using the PeopleCode SQL class and the meta-SQL function %SQL.
- Ability to dynamically change the execution flow of a given Application Engine section.

Use the AESession class to do the latter. This section object is used to modify the steps and SQL associated with a given section by using PeopleCode.

Before describing the specifics of the AESession class, the following are some general terms to understand:

- *base* section

The *base* section represents the Application Engine section you are working on. This is the section that you are changing in PeopleCode. In other words, it's the target section.

- *template* section

The *template* section represents the Application Engine section that is the source, or "model" for the section you're building. You copy *from* the template section *to* the base section.

The template must exist in the database before you can use it.

If the base section you specify doesn't exist, a *new* base section is created. This enables you to dynamically create sections as needed.

You can copy steps (and their attributes) from the template to the base. The only attribute of the step you can modify is the SQL statement that gets executed.

 Warning

When you open or get an AERSection object, (that is, the base section) any existing steps in the section are deleted. You must add a new step to the section before you can modify it.

The main assumption for this class is that your rules are dynamic primarily in the SQL that they execute, but that the structure of the rules are static, or at least defined well enough that a standard template can be applied.

Note that you can't update the Application Engine *actions* that are not SQL-related (that is, PeopleCode, Call Section, or Log Message). In other words, you can't change the PeopleCode associated with a PeopleCode action within a step. You can add a step containing a PeopleCode action to your new section, but you can't change the PeopleCode dynamically.

Related Topics

- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- PeopleCode Language Reference: %SQL meta-SQL element
- Application Engine: Adding Steps

How an AERSection is Accessed

When an AERSection is opened (or accessed), the system first checks if it exists with the given input parameters.

If the base section you specify doesn't exist, a *new* base section is created. This enables you to dynamically create sections as needed. In addition, if the target section doesn't exist, all section-level attributes are copied from the template to the target section. If the target exists, it retains its attribute settings.

If an effective date is specified (with EffDt), but there is no match using that effective date, the AERSection is opened using the base effective date of '1900-01-01'.

The market defined for the current component is used for the section to be open. If no section with this market exists, the default GBL is used.

If you open an AERSection object from within a running Application Engine program, the market value is set to the value of the current process.

The database platform you're currently running is used as the database platform for the section to be opened. If no section with this database platform exists, the default "none" is used.

To find the correct section to open, the precedence is:

1. Market
2. Database platform
3. Effective date

When a section is closed and its changes are saved, the market and database platform from the system that performed the changes is used as the market and database platform for the modified section.

Let's take an example. Assume that you're running on Db2 for z/OS, and your current market is set to 'MKT'. Assume that you want to open a section called Sect1 in an Application Engine program called TestAppl, and that your data looks something like this:

Number	Application Engine Program	Application Engine Section	Market	Platform	Effective Date
1	TestAppl	Sect1	USA	DB2	1990-01-01
2	TestAppl	Sect1	USA	None	1900-01-01
3	TestAppl	Sect1	GBL	None	1900-01-01

If you use:

```
&SECTION.Open("TestAppl", "Sect1", "1998-12-14");
```

Then the third section in the previous list is used, because the market takes highest precedence. When the section is saved, the values for market and platform are updated to the current system values.

Warning

When you open or get an AERSection object, (that is, any base section) any existing steps in the section are deleted. You must add a new step to the section before you can modify it.

The other attributes of the section, however, are retained, with the exceptions noted previously.

AERSection Example

Assume that you have a template section called TEMPLATE in the Application Engine program called MY_APPL. The template looks like this:

Steps	Actions
NewStep1	DO When DO Select SQL
NewStep2	DO Select CallSection

Also, assume that you have a base section called DYN_SECT in the Application Engine program called RULES. When you start, this section looks like this:

Steps	Actions
Step1	DO Select Call Section DO Unit
Step2	Call Section

Here's the PeopleCode:

```
Local AERSection &Section;
&Section = GetAERSection("RULES", "DYN_SECT");
/* Open the base section */
&Section.SetTemplate("MY_APPL", "TEMPLATE");
/* Set the template section */
&Section.AddStep("NewStep2");
/* Insert NewStep2 */
/* Do some SQL stuff here */
&Section.SetSQL("DO_SELECT", &MySql);
/* Modify the SQL in the added step */
&Section.Save();
&Section.Close();
/* Save and close */
```

The base section looks like this after execution:

Steps	Actions
NewStep2	DO Select Call Section

Note

The existing steps in the base section have been *overwritten* by the new step from the template section.

Data Type of an AERSection Object

You should declare an AERSection object as type AERSection. For example:

```
Local AERSection &SECTION;
```

Scope of an AERSection Object

An AERSection object can only be instantiated from PeopleCode.

The AERSection Object is designed for use within online pages. Typically, dynamic sections should be constructed in response to an end-user action.

Note

Do not call an AERSection object from an Application Engine PeopleCode Action. If you need to access another section, use CallSection Actions instead.

Related Topics

- Application Engine: Specifying Actions

AERSection Class Built-in Function

PeopleCode Language Reference: GetAERSection function

AERSection Class Methods

In this section, we discuss each AERSection class method, in alphabetical order.

AddStep method: AERSection class

Syntax

```
AddStep(ae_step_name [, NewStepName])
```

Description

The given step name from the template section is added as the next step into the base section, and named the existing step name.

Note

When you open or get a section, all the existing steps are deleted. The first time you execute AddStep, you add the first step. The second time you execute AddStep, you add the second step, and so on.

All attributes of the step are copied, including all of its actions. The only changeable attribute of a step are its SQL statements, which can be modified using the SetSQL method. SetSQL is run on the *current* step, that is, the step most recently added.

You can also change the name of the step by using the optional parameter *NewStepName*.

If the step named does not exist in the template, an error occurs. Likewise, if you have not opened or set the template for the section, you receive an error.

Parameters

Parameter	Description
<i>ae_step_name</i>	Specify the step name from the template to be added as the <i>next</i> step in the base section. This parameter takes a string value.

Parameter	Description
<i>NewStepName</i>	Specify a new name for the step to be added. This parameter is optional, and takes a string value.

Returns

None.

Example

See [AERSection Example](#).

Related Topics

- [SetSQL method: AERSection class](#)

Close method: AERSection class

Syntax

Close()

Description

Close closes the AERSection object. Any unsaved changes to the section are discarded.

Parameters

None.

Returns

None.

Example

See [AERSection Example](#).

Related Topics

- [Save method: AERSection class](#)
- [Open method: AERSection class](#)
- PeopleCode Language Reference: GetAERSection function

Open method: AERSection class

Syntax

Open(*ae_applid*, *ae_section*, [*effdt*])

Description

The Open method associates the AERSection object with the given Application Engine section, based on the *ae_applid* and *ae_section*. If the *effdt* is specified, this is also used to get the section object. In other words, the Open method sets the base section.

Warning

When you open or get an AERSection object, (that is, the base section) any existing steps in the section are deleted.

Note

If the base section you specify doesn't exist, a *new* base section is created. This enables you to dynamically create sections as needed. In addition, if the target section doesn't exist, all section-level attributes are copied from the template to the target section. If the target exists, it retains its attribute settings.

If the AERSection is still open when you issue the Open method, the previously opened object is discarded and none of the changes saved. To prevent accidentally discarding your changes, you can use the IsOpen property to verify if a section is already open.

The AERSection is open based on the Market and database type of your current system.

Parameters

Parameter	Description
<i>ae_applid</i>	Specify the application ID of the section you want to access. This parameter takes a string value.
<i>ae_section</i>	Specify the section name of the section you want to access. This parameter takes a string value.
<i>effdt</i>	Specify the effective date of the section you want to access (optional). This parameter takes a string value.

Returns

An AERSection object.

Example

```
Local AERSection &SECTION;  
  
&SECTION = GetAERSection("RULES1", "DYN_SECT");  
  
/* do some processing */  
  
&SECTION.Close();  
  
&SECTION.Open("RULES2", "DYN_SECT");  
  
/* do additional processing */
```

Related Topics

- [IsOpen property: AERSection class](#)
- PeopleCode Language Reference: GetAERSection function

Save method: AERSection class

Syntax

Save()

Description

The Save method saves the section to the database. The AERSection object remains open after you use this method. To close the object, you must use the Close method.

You must commit all database changes prior to using this method. This is to avoid locking critical Tools tables and hence freezing all other users. You receive a runtime error message if you try to use this method when there are pending database updates, and your PeopleCode program terminates. You need to commit any database updates prior to using this method. Use the CommitWork function to commit database updates.

Parameters

None.

Returns

None.

Example

See [AERSection Example](#).

Related Topics

- [Close method: AERSection class](#)

- [Open method: AERSection class](#)
- PeopleCode Language Reference: CommitWork function

SetSQL method: AERSection class

Syntax

SetSQL(*action_type_string*, *string*)

Description

The SetSQL method replaces the SQL associated with the given action type in the current step in the base section with the SQL in *string*. The *current* step is the latest step that was added using AddStep. The action types are:

- DO_WHEN
- DO_WHILE
- DO_SELECT
- SQL
- DO_UNTIL

Note

All action types must be passed in as strings with quotation marks.

If the action specified does not exist in the current step, an error occurs.

You can use a SQL object as *string*.

```
&SECTION.SetSQL("SQL", &SQL);
```

Parameters

Parameter	Description
<i>action_type</i>	Specifies the action type of the current step that should be changed. This parameter takes a string value.
<i>string</i>	Specifies the SQL to be used to replace the SQL in the current step.

Returns

None.

Example

See [AERSection Example](#).

Related Topics

- [AddStep method: AERSection class](#)
- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.

SetTemplate method: AERSection class

Syntax

```
SetTemplate(ae_applid, ae_section)
```

Description

The SetTemplate method sets the template to be used with an AERSection object, as identified by *ae_applid* and *ae_section*.

The rules for assigning a template section are similar to the rules for selecting a base section. The selection of market and database platform are done exactly the same. However, the effective date of the template is always set based on the effective date of '1900-01-01'.

You must set the template before you can use any of the other methods.

Parameters

Parameter	Description
<i>ae_applid</i>	Specify the name of the Application Engine program that contains the section to be used as the template.
<i>ae_section</i>	Specify the name of the Application Engine section in the program to be used as the section template.

Returns

None.

Example

See [AERSection Example](#).

Related Topics

- [Open method: AERSection class](#)
- [How an AERSection is Accessed](#)
When an AERSection is opened (or accessed), the system first checks if it exists with the given input parameters.
- PeopleCode Language Reference: GetAERSection function

AERSection Class Property

In this section, we discuss the IsOpen AERSection property.

IsOpen property: AERSection class

Description

If this property is True, the section object is already open. If you try to open a section object that is already open, the open section object is closed and all the changes that haven't been saved are discarded before the object is re-opened.

Example

```
If Not(&MYSECTION.IsOpen) Then  
    &MYSECTION.Open(MYAPPLID, SECTION2);  
End-If;
```

3

Analytic Calculation Engine Classes

Understanding the Analytic Calculation Engine Classes

PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

More specifically, developers create *analytic models* in order to define the rules which are used to calculate data. Developers also create PeopleSoft Pure Internet Architecture pages with *analytic grids* in order to display the data within PeopleSoft applications. End users view, analyze and make changes to this data. When end users save their changes, PeopleSoft Analytic Calculation Engine recalculates the data and saves the calculated data to the database.

PeopleCode enables developers to manipulate analytic calculation data as follows:

- Use the Analytic Calculation Engine classes to either retrieve or specify data in an instance of an analytic model loaded into the system, and also to calculate (or recalculate) cube values.
- Use the Analytic Calculation Engine metadata classes to manipulate an analytic model definition. For example, you can add cubes to a cube collection or rename an existing user function for a model.
- Use the Analytic Grid classes to manipulate the display of analytic calculation data on a page.
- Use the Analytic Type classes to manipulate an analytic type definition. For example, you can specify a new analytic model for an analytic type definition.

Important

The Analytic Calculation Engine classes are not supported on IBM z/OS and Linux for IBM System z platforms.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.
- [AnalyticGrid Class Reference](#)
This reference for the AnalyticGrid class includes:
- [AnalyticType Classes Example](#)
The following is a typical example of using the AnalyticType classes.

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.

Using the Analytic Calculation Engine Classes with Application Engine

All Application Engine programs run on the application engine server. This means your program runs on the application engine server, not the analytic server.

PeopleSoft recommends that you put each of the following methods into its own step when you're creating an analytic calculation using an Application Engine program:

- AnalyticInstance Load method
- AnalyticInstance Unload method
- AnalyticInstance Copy method
- AnalyticInstance Delete method (in case of any readable/writable records in the analytic type)
- AnalyticModel Recalculate method
- CubeCollection SetData method

Also, with the Recalculate method, you should use the **Commit after step** option.

Running Synchronously

Some of the methods and functions associated with these classes have the option of being run asynchronously. When you run these asynchronously, and not from an Application Engine program, these methods and functions have additional functionality, that is, if the RenServer is configured, a window displays the PeopleSoft Analytic Calculation Engine execution status.

Using Trees

PeopleSoft Analytic Calculation Engine uses trees to establish hierarchies of a dimension's parent-child relationships. PeopleSoft Analytic Calculation Engine uses these hierarchies to:

- Calculate and display aggregated data to end users.
- Enable end users to navigate through data by performing such actions as expanding and collapsing nodes.
- Enable end users to drill down and drill up through data.

It is important to understand that PeopleSoft trees and hierarchies differ in the following manner: You create one tree for each dimension that requires a hierarchy. The analytic model uses that tree to create one hierarchy for one dimension.

Use the AttachTree method to attach a tree to a dimension, and use the DetachTree method to detach the tree from the dimension.

You should be aware of the following restrictions:

- Because the AttachTree method attaches a specific tree to an analytic instance, the system throws an error if the tree's name, setID or effective date is incorrect.
- You can attach only one tree to one dimension at a time.

- If the analytic instance is already loaded into the analytic server, the tree isn't attached until the analytic model is loaded.
- No aggregate data is displayed to the user after you use the DetachTree method.
- If your application loads the analytic model after the tree has been detached, the analytic model doesn't create a hierarchy for the dimension.
- If the analytic instance is already loaded into the analytic server, the DetachTree method isn't applied to the tree until the next time your application loads the analytic instance.

You can only attach a tree to an analytic model before the analytic instance

No aggregate data displayed to user after detach tree.

Related Topics

- Analytic Calculation Engine: Understanding the Relationship of PeopleSoft Trees to Analytic Models

Error Handling

All the Analytic Calculation Engine classes throw PeopleCode exceptions for any fatal error that occurs in the execution of the operation. PeopleSoft recommends enclosing your analytic model programs in try-catch statements. This way, if your program catches the exception, the message set and message number that are associated with the exception object indicate the error.

Using the Messages Property

Use the Messages property to determine whether any errors occurred. The Messages property returns a multi-dimensional array. You can use the Len property of the array class to determine the length of the array. If the array has a length of 0, there are no errors.

Data Types for Analytic Calculation Engine Classes

Every PeopleSoft Analytic Calculation Engine object is declared as its own data type, that is, AnalyticModel objects are declared as type AnalyticModel, CubeCollection objects are declared as type CubeCollection, and so on.

The following are the data types for the PeopleSoft Analytic Calculation Engine classes:

- AnalyticInstance
- AnalyticModel
- CubeCollection

Scope of Analytic Calculation Engine Classes

The Analytic Calculation Engine objects can only be instantiated from PeopleCode.

These objects can be used anywhere you have PeopleCode, that is, in a Application Engine program, an application class, record field PeopleCode, and so on.

Analytic Calculation Engine objects can be of scope Local, Component, or Global.

Analytic Calculation Engine Classes Built-in Functions

PeopleCode Language Reference: CreateAnalyticInstance function

PeopleCode Language Reference: GetAnalyticInstance function

AnalyticInstance Class Methods

In this section, we discuss the AnalyticInstance methods. The methods are discussed in alphabetical order.

CheckAsyncStatus method: AnalyticInstance class

Syntax

```
CheckAsyncStatus(OperationID)
```

Description

Use the CheckAsyncStatus method to determine the current state of the asynchronous methods, as well as the Load method when executed asynchronously.

Parameters

Parameter	Description
<i>OperationID</i>	Specify the operation ID of the asynchronous operation. This operation ID is returned when one of the asynchronous operations is executed.

Returns

This method returns one of the following values:

Value	Description
Less than 0	The operation completed with errors.
0	The operation has not completed yet.
Greater than 0	The operation completed successfully.

Related Topics

- [CheckStatus method: AnalyticInstance class](#)
- [Load method: AnalyticInstance class](#)
- [Unload method: AnalyticInstance class](#)

CheckStatus method: AnalyticInstance class

Syntax

CheckStatus()

Description

Use the CheckStatus method to determine the current state of the analytic calculation engine.

Parameters

None.

Returns

This method returns one of the following values:

Value	Description
%AnalyticInstance_NotLoaded	The analytic instance has not been loaded into the application server.
%AnalyticInstance_Loading	The analytic instance is being loaded.
%AnalyticInstance_Idle	The analytic instance is idle, that is, not currently running.
%AnalyticInstance_Busy	The analytic instance is currently running.
%AnalyticInstance_Inaccessible	The analytic instance is currently inaccessible.
%AnalyticInstance_Terminating	The analytic instance is currently ending.

Related Topics

- [Load method: AnalyticInstance class](#)
- [Unload method: AnalyticInstance class](#)

Copy method: AnalyticInstance class

Syntax

Copy(*NewID*, *ForceDelete&Record*)

Description

Use the Copy method to copy all the data and metadata to a new analytic instance from the current analytic instance.

If the specified *NewID* exists, or any data for *NewID* exists, the data is not copied unless *ForceDelete* has been specified as true.

If a tree is attached to the existing analytic instance, all tree data is also copied to the new analytic instance.

In addition, the analytic instance and the tree information are not copied unless the record specified with the *&Record* parameter is populated with the existing analytic instance ID.

Parameters

Parameter	Description
<i>NewID</i>	Specify the new analytic instance ID as a string.
<i>ForceDelete</i>	If the specified <i>NewID</i> exists, and <i>ForceDelete</i> is specified as false, the copy is cancelled. If the specified <i>NewID</i> exists, and <i>ForceDelete</i> is specified as true, the analytic instance specified by <i>NewID</i> is deleted, and a new analytic instance is created from the current ID.
<i>&Record</i>	Specify an already instantiated record object to pass in values to the Copy application package method that's defined with the specified analytic type definition.

Returns

None.

Example

```
&ai.Copy("MYTESTCOPY", True, &MyRecord);
```

Related Topics

- [Delete method: AnalyticInstance class](#)
- [Load method: AnalyticInstance class](#)
- [Unload method: AnalyticInstance class](#)
- Optimization Framework: Understanding Analytic Type Definitions

Delete method: AnalyticInstance class

Syntax

```
Delete(ForceUnload, &RecordRef)
```

Description

Use the Delete method to remove all the metadata related to the given analytic instance.

Every analytic type definition is defined with an application package that contains three methods: Create, Delete, and Copy. The values in *&RecordRef* are passed to the Delete method.

This method does not delete the analytic instance if the analytic instance is currently loaded. Specify *ForceUnload* as true to unload the analytic instance before deleting it.

Parameters

Parameter	Description
<i>ForceUnload</i>	Specify whether to force the deletion of the analytic instance. This parameter takes a Boolean value. If the analytic instance is currently loaded, specifying true for this parameter forces the analytic instance to be unloaded before it is deleted.
<i>&RecordRef</i>	Specify a record to pass in values to the application package Delete class that's associated with the analytic type definition.

Returns

None.

Example

```
&ai.Delete(TRUE, &Record);
```

Related Topics

- [Unload method: AnalyticInstance class](#)
- Optimization Framework: Understanding Analytic Type Definitions

GetAnalyticModel method: AnalyticInstance class

Syntax

```
GetAnalyticModel(AnalyticModel.ModelName)
```

Description

Use the GetAnalyticModel method to return a reference to an AnalyticModel object.

Parameters

Parameter	Description
<i>AnalyticModel.ModelName</i>	Specify the name of the analytic model for which you want to return a reference. The model definition must already exist in Application Designer.

Returns

A reference to an AnalyticModel object or Null.

Related Topics

- [AnalyticModel Class Methods](#)
In this section, we discuss the AnalyticModel methods. The methods are discussed in alphabetical order.

Load method: AnalyticInstance class

Syntax

```
Load(Sync, IdleTimeOut, Message.messageName)
```

Description

Use the Load method to load the AnalyticInstance object executing the method into the analytic server.

If this analytic instance is already loaded, this method fails.

When the analytic instance is loaded, if there are fields in the analytic type definition that haven't been selected but are mapped to a cube or dimension, an error message is logged to the analytic server log and the analytic instance load fails.

If there is a record in the analytic type definition that has none of its fields mapped to a cube or dimension, a warning message is logged to the analytic server log.

Parameters

Parameter	Description
<i>Sync</i>	Specify whether the analytic instance should be run synchronously or asynchronously. This parameter takes a Boolean value: true if it should be run synchronously, false otherwise. See Running Synchronously .
<i>IdleTimeOut</i>	Specify, in minutes, the idle time out value. A value of 0 is an infinite time out. A value of -1 indicates that it should use the value specified in the default configuration for the analytic server. Note: When loading an analytic grid, you should always specify a value of -1. See Analytic Calculation Engine: Loading and Unloading Analytic Instances.
<i>Message.MessageName</i>	Specify an application message that should be sent if the analytic server crashes while the analytic instance is loaded. Note: The message is sent when the analytic server process restarts itself after crashing.

Returns

A string. For asynchronous loads, this string is passed to the CheckAsyncStatus method.

This method returns one of the following values:

Value	Description
%AnalyticInstance_NotLoaded	The analytic instance has not been loaded into the analytic server.
%AnalyticInstance_Loading	The analytic instance is being loaded.

Value	Description
%AnalyticInstance_Idle	The analytic instance is idle, that is, not currently running.
%AnalyticInstance_Busy	The analytic instance is currently running.
%AnalyticInstance_Inaccessible	The analytic instance is currently inaccessible.
%AnalyticInstance_Terminating	The analytic instance is currently terminating.

Related Topics

- [CheckAsyncStatus method: AnalyticInstance class](#)
- [Unload method: AnalyticInstance class](#)

RunAsync method: AnalyticInstance class

Syntax

RunAsync()

Description

Use the RunAsync method to specify if the analytic instance executing the method should be run in an asynchronous manner.

This method is used only to define the transaction in the analytic type definition in optimization. PeopleSoft Analytic Calculation Engine programs uses the Load method for defining synchronous or asynchronous operation.

Parameters

None.

Returns

None.

Related Topics

- Optimization Framework: Creating Analytic Type Definitions

RunSync method: AnalyticInstance class

Syntax

RunSync()

Description

Use the RunSync method to specify if the analytic instance executing the method should be run in a synchronous manner.

This method is used only to define the transaction in the analytic type definition in optimization. PeopleSoft Analytic Calculation Engine programs uses the Load method for defining synchronous or asynchronous operation.

Parameters

None.

Returns

None.

Related Topics

- [Optimization Framework: Creating Analytic Type Definitions](#)

Terminate method: AnalyticInstance class

Syntax

```
Terminate()
```

Description

Use the Terminate method to force the termination of an analytic instance loaded in an analytic server.

This method should only be used from PeopleCode running in a Application Engine program to cause an analytic instance loaded in an analytic server to be terminated.

Attempting to terminate an analytic instance that is not loaded or is loaded in a Application Engine process results in a PeopleCode exception.

Although the Terminate method returns instantly, it may take up to a minute before the analytic instance is actually terminated.

Parameters

None.

Returns

None.

Related Topics

- [Load method: AnalyticInstance class](#)
- [Unload method: AnalyticInstance class](#)

Unload method: AnalyticInstance class

Syntax

```
Unload()
```

Description

Use the Unload method to unload the analytic instance executing the method from the analytic server. After unloading the analytic instance, the analytic server process is restarted.

Parameters

None.

Returns

None.

Example

```
&ai.UnLoad();
```

Related Topics

- [Load method: AnalyticInstance class](#)

AnalyticInstance Class Properties

In this section, we discuss the AnalyticInstance properties. The properties are discussed in alphabetical order.

AnalyticType property: AnalyticInstance class

Description

This property returns the name of the analytic type definition for this AnalyticInstance object as a string.

This property is read-only.

ID property: AnalyticInstance class

Description

This property returns the analytic instance ID of this AnalyticInstance object as an integer.

This property is read-only.

Messages property: AnalyticInstance class

Description

This property returns a multi-dimensional array of any, containing the messages that occurred.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

After you access this property, only new messages are returned, that is, messages are only returned once.

This property is read-only.

Related Topics

- [RunSync method: AnalyticInstance class](#)

AnalyticModel Class Methods

In this section, we discuss the AnalyticModel methods. The methods are discussed in alphabetical order.

AddMember method: AnalyticModel class

Syntax

```
AddMember(DimName, MemberName)
```

Description

Use the AddMember method to add the specified dimension member to the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the dimension to which you want to add the member.
<i>MemberName</i>	Specify the name of the member that you want to add to the specified dimension.

Returns

None.

Related Topics

- [GetMembers method: AnalyticModel class](#)
- [RenameMember method: AnalyticModel class](#)

AttachTree method: AnalyticModel class

Syntax

```
AttachTree(DimName, TreeName, setID, UserKeyValue, EffDt, NodeName,  
OverrideRecord, DetailStartLvl, TreeDiscardLvl)
```

Description

Use the AttachTree method to attach a tree to a dimension. Only one tree can be attached to a dimension at a time. You can only attach a tree before the analytic instance is loaded.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to attach a tree to.
<i>TreeName</i>	Specify the name of the tree that you want to attach to the dimension.
<i>setID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a setID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter
<i>EffDt</i>	Specify an effective date for this tree. This parameter takes a string value.
<i>NodeName</i>	Specify the tree node used as the dimension hierarchy root. This can be different from the tree root, that is, you can pick a subtree.
<i>OverrideRecord</i>	Specify the name of a record to be used for overriding the aggregate. See Analytic Calculation Engine: Working with Overrides.
<i>DetailStartLvl</i>	Specify the tree level number (such as 1 for the node hierarchy root specified by the <i>NodeName</i> parameter) at which detail nodes start. If you specify a value other than 0, any nodes at this level or greater than this level are considered details node, and any nodes with levels less than the start level are considered aggregate nodes If you specify 0, detail nodes are nodes that don't have parents (a node can be a parent either by having children or by having child ranges).

Parameter	Description
<i>TreeDiscardLvl</i>	Specify the tree level number (such as 1 for the node hierarchy root specified by the <i>NodeName</i> parameter) at which to stop loading the tree. Nodes at this level or at levels greater are discarded. This parameter is only used if it has a value other than 0, and if it has a value greater than <i>DetailStartLvl</i> .

Returns

None.

Related Topics

- [DetachTree method: AnalyticModel class](#)
- [GetTree method: AnalyticModel class](#)
- [Understanding Tree Classes](#)
Using the tree classes in your PeopleCode, you have access to all the functionality of PeopleSoft Tree Manager. Your application should instantiate the appropriate tree objects when it must work with the tree system database data, call the appropriate methods and properties, then close the objects when it is finished.
- Analytic Calculation Engine: Understanding the Relationship of PeopleSoft Trees to Analytic Models

CalculateCube method: AnalyticModel class

Syntax

```
CalculateCube(CubeName[, Sync])
```

Description

Use the CalculateCube method to calculate the named cube in synchronous mode.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that you want to calculate.
<i>Sync</i>	This parameter is optional and is not used. It is only being included for previous releases. This parameter takes a Boolean value. The value of this parameter is ignored. The cube is always calculated in synchronous mode.

Returns

None.

Related Topics

- [Running Synchronously](#)
Some of the methods and functions associated with these classes have the option of being run asynchronously. When you run these asynchronously, and not from a Application Engine program, these methods and functions have additional functionality, that is, if the RenServer is configured, a window displays the PeopleSoft Analytic Calculation Engine execution status.
- [Recalculate method: AnalyticModel class](#)

DetachTree method: AnalyticModel class

Syntax

DetachTree(*DimName*)

Description

Use the DetachTree method to detach a tree from the specified dimension.

You can only attach a tree when the analytic instance is not loaded. This method fails if you try to detach a tree while the analytic instance is loaded.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension from which you want to detach a tree.

Returns

None.

Related Topics

- [AttachTree method: AnalyticModel class](#)
- [GetTree method: AnalyticModel class](#)
- [Understanding Tree Classes](#)
Using the tree classes in your PeopleCode, you have access to all the functionality of PeopleSoft Tree Manager. Your application should instantiate the appropriate tree objects when it must work with the tree system database data, call the appropriate methods and properties, then close the objects when it is finished.

GetCubeCollection method: AnalyticModel class

Syntax

GetCubeCollection(*CubeCollName*)

Description

Use the GetCubeCollection method to return a reference to a CubeCollection object.

Parameters

Parameter	Description
<i>CubeCollName</i>	Specify the name of the cube collection to which you want a reference.

Returns

A CubeCollection object if successful.

Related Topics

- [CubeCollection Class](#)
Instantiate a CubeCollection object using the AnalyticModel class GetCubeCollection method.

GetCellProperties method: AnalyticModel class

Syntax

```
GetCellProperties(CubeName, &Node)
```

Description

Use the GetCellProperties method to get information about a cell.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that contains the cell you want information about.
<i>&Node</i>	Specify an already instantiated array of array of string (a two-dimensional array of string) containing name-value pairs of the node name and the node detail.

Returns

An array of string.

The four strings returned in the array are:

1. Cell type. Values are "Aggregate" or "Detail"
2. User function.
3. Dimension for aggregation, the dimension name.
4. Aggregation reason. Values are: "Dimension Level Override", "Member Level Override", "Cube Dimension Level Override", "None."

Related Topics

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array,

you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetMembers method: AnalyticModel class

Syntax

```
GetMembers(DimName, DimFilter)
```

Description

Use the GetMembers method to return the names of the members in the specified dimension. You can specify a user function to be used as a filter for the dimension using *DimFilter*.

When filtering hierarchy nodes, if the parent member is filtered, all the child nodes are also filtered.

In order to filter the parent member if all of its children are filtered, the user function should be written such that for the parent node, apply the condition on all of its children, using the FORCHILDREN built-in function. If none of the children satisfy the condition, return zero from the user function, which filters the parent node.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension from which you want to get the members.
<i>DimFilter</i>	Specify a user function that you want to use to filter the dimension.

Returns

A two-dimensional array of any.

The first dimension contains the member names. The second dimension contains the parent of the member. The members are sorted in the hierarchy order.

If the dimension does not have a hierarchy, all members are returned as level one.

For example, if the dimension has the following members:

```
ALLREGIONS
  NORTH AMERICA
    USA
    CANADA
    MEXICO
  EUROPE
    FRANCE
    GERMANY
    ENGLAND
  ASIA
    JAPAN
    CHINA
```

The GetMembers method returns the following:

Member Name	Level
ALLREGIONS	Null
NORTHAMERICA	ALLREGIONS
USA	NORTHAMERICA
CANADA	NORTHAMERICA
MEXICO	NORTHAMERICA
EUROPE	ALLREGIONS
FRANCE	EUROPE
ENGLAND	EUROPE
GERMANY	EUROPE
ASIA	ALLREGIONS
JAPAN	ASIA
CHINA	ASIA

If the total member is present in the metadata, it is returned as level zero.

Related Topics

- [AddMember method: AnalyticModel class](#)
- [RenameMember method: AnalyticModel class](#)

GetTree method: AnalyticModel class

Syntax

GetTree(*DimName*)

Description

Use the GetTree method to return an array of string that contains information about the tree that is attached to the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension to which a tree is attached.

Returns

An array of string.

The array items have the following format:

1. TreeName
2. setID
3. UserKeyValue

4. EffDt
5. BranchName
6. Override record name
7. DetailStartLvl
8. TreeDiscardLvl

Related Topics

- [AttachTree method: AnalyticModel class](#)
- [DetachTree method: AnalyticModel class](#)
- [Understanding Tree Classes](#)

Using the tree classes in your PeopleCode, you have access to all the functionality of PeopleSoft Tree Manager. Your application should instantiate the appropriate tree objects when it must work with the tree system database data, call the appropriate methods and properties, then close the objects when it is finished.

Recalculate method: AnalyticModel class

Syntax

Recalculate(*Sync*)

Description

Use the Recalculate method to recalculates the loaded analytic model. If *Sync* is true, the transaction is synchronous, else it is performed asynchronously.

The Recalculate method always writes any changes to readable, readable and writable, as well as writable records to the database as specified by the analytic type definition.

If you are running in asynchronous mode, this method returns an optional string that contains the operation ID to be used with the CheckAsyncStatus property.

Parameters

Parameter	Description
<i>Sync</i>	Specify whether the recalculation should be run synchronously or asynchronously. This parameter takes a Boolean value: true if it should be run synchronously, false otherwise.

Returns

A string.

Related Topics

- [CalculateCube method: AnalyticModel class](#)
- [CheckAsyncStatus method: AnalyticInstance class](#)
- [AnalyticModelDefn method: AnalyticModelDefn class](#)

RenameMember method: AnalyticModel class

Syntax

```
RenameMember(DimName, OrigMemberName, NewMemberName)
```

Description

Use the RenameMember method to rename a member in the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the dimension that contains the member you want to rename.
<i>OrigMemberName</i>	Specify the name of the member that you want to rename.
<i>NewMemberName</i>	Specify the new name for the member specified by <i>OrigMemberName</i> .

Returns

None.

Related Topics

- [AddMember method: AnalyticModel class](#)
- [GetMembers method: AnalyticModel class](#)

AnalyticModel Class Property

In this section, we discuss the AnalyticModel class property.

Messages property: AnalyticModel class

Description

This property returns a multi-dimensional array of any containing the messages that occurred during execution of the Recalculate method.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

After you access this property, only new messages are returned, that is, messages are only returned once.

This property is read only.

Related Topics

- [Recalculate method: AnalyticModel class](#)

CubeCollection Class

Instantiate a CubeCollection object using the AnalyticModel class GetCubeCollection method.

In cube collections, the total member behaves just as the root of the hierarchy. If it's present, it's displayed first in the list.

Filtering of members in a dimension in the cube collection is similar to filtering members using the AnalyticModel class GetMembers method. If you filter the parent node, the children of that node are filtered as well.

See [GetCubeCollection method: AnalyticModel class](#).

CubeCollection Class Methods

In this section we discuss the CubeCollection class methods. The methods are described in alphabetical order.

CollapseNode method: CubeCollection class

Syntax

CollapseNode(*DimName*, *&Node*)

Description

Use the CollapseNode method to collapse a node in the dimension specified by *DimName*.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that contains the node you want to collapse.
<i>&Node</i>	Specify an already instantiated array of array of string (a two-dimensional array of string) containing name-value pairs of the node name and the node detail. For example: PRODUCTS REGION Fax Modem East

Returns

None.

Related Topics

- [ExpandNode method: CubeCollection class](#)

DrillIntoNode method: CubeCollection class

Syntax

```
DrillIntoNode(DimName, &Node)
```

Description

Use the DrillIntoNode method to display more data for the specified node and dimension. This is very similar to expanding, except that when you expand a node, the top level (node) is still present. When you drill into a node, the top level or levels are no longer displayed.

Parameters

Parameter	Description				
<i>DimName</i>	Specify the name of the dimension that contains the node that you want to drill into.				
<i>&Node</i>	Specify an already instantiated array of array of string (a two-dimensional array of string) containing name-value pairs of the node name and the node detail. For example: <table><tr><td>PRODUCTS</td><td>Fax Modem</td></tr><tr><td>REGION</td><td>East</td></tr></table>	PRODUCTS	Fax Modem	REGION	East
PRODUCTS	Fax Modem				
REGION	East				

Returns

None.

Related Topics

- [DrillOutOfNode method: CubeCollection class](#)

DrillOutOfNode method: CubeCollection class

Syntax

```
DrillOutOfNode(DimName, &Node)
```

Description

Use the DrillOutOfNode method to collapse the data that you just expanded.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that contains the node you want to drill out of.

Parameter	Description
<i>&Node</i>	Specify an already instantiated array of array of string (a two-dimensional array of string) containing name-value pairs of the node name and the node detail. For example: PRODUCTS REGION Fax Modem East

Returns

None.

Related Topics

- [DrillIntoNode method: CubeCollection class](#)

ExpandNode method: CubeCollection class

Syntax

```
ExpandNode(DimName, &Nodes, ExpandAll)
```

Description

Use the ExpandNode method to expand the nodes in the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension contains the node that you want to expand.
<i>&Nodes</i>	Specify an already instantiated array of array of string (a two-dimensional array of string) containing name-value pairs of the node name and the node detail.
<i>ExpandAll</i>	Specify whether to expand the sub-nodes or not. This parameter takes a Boolean value; true to expand the nodes, false to not expand the nodes.

Returns

None.

Example

In the following example, both the Accounts and Dept dimensions have hierarchies.

```

Account          Dept
All Accounts      All Depts
      |  ---- 100      |  - ---- A

```

[illegible]

When the data is displayed, it will be as follows:

All Accounts	
100	All Depts
200	All Depts
300	All Depts

When you want to expand All Depts under Account 100 , use the following PeopleSoft Analytic Calculation Engine code:

```
BAMCoordinate coord;  
coord.SetValue( "Account", "100");  
coord.SetValue("Dept ", "All Depts")  
ExpandNode("Dept", coord, false)
```

The result of this will have the following:

```

All Accounts
    All Depts
    100
    All Depts
    A
    B
    200
    All Depts
    300
    All Depts

```

Related Topics

- CollapseNode method: CubeCollection class

GetData method: CubeCollection class

Syntax

```
GetData(&DataRowset, StartRow, EndRow[, NetChanges])
```

Description

Use the `GetData` method to populate a rowset with data from the cube collection.

DataRowset is the rowset into which is put the data. If you specify an already instantiated rowset, the given rowset is populated with the data. If you specify a rowset that has not been instantiated, a new rowset is created, with the record field definition of the desired cube collection.

Parameters

Parameter	Description
<i>&DataRowset</i>	Specify the rowset into which to put the data. If you specify an already instantiated rowset, the given rowset is populated with the data. If you specify a rowset that has not been instantiated, a new rowset is created, with the record field definition of the desired cube collection.
<i>StartRow</i>	Specify the first row of data to be retrieved, as an integer.
<i>EndRow</i>	Specify the last row of data to be retrieved, as an integer. If you specify a zero for this parameter, all rows are retrieved.
<i>NetChanges</i>	Specify whether all values within the range are returned, or whether just values changed since the last time the Recalculate method was used. This parameter takes a Boolean value: true, return all values, false, return just the changed values. The default value is false.

Returns

None.

Related Topics

- [SetData method: CubeCollection class](#)
- [Messages property: CubeCollection class](#)
- [Understanding Rowset Class](#)

A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

GetDimFilter method: CubeCollection class

Syntax

`GetDimFilter(DimName)`

Description

Use the `GetDimFilter` method to return the name of the current user function (filter) used with the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension for which you want the associated user function (filter).

Returns

A string containing the name of the user function. If there is no filter applied to the dimension, this method returns an empty string.

Related Topics

- [SetDimFilter method: CubeCollection class](#)

GetDimSort method: CubeCollection class

Syntax

`GetDimSort(DimName)`

Description

Use the GetDimSort to return the current sort settings on the specified dimension.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension for which you'd like the sort settings.

Returns

An array of any. The array contains the same structure as the signature for the SetDimSort method.

Value	Description
Array index 1	IsAscending as Boolean
Array index 2	Key1 as string
Array index 3	IsAscending2 as Boolean
Array index 4	Key2 as string
Array index 5	IsAscending3 as Boolean
Array index 6	Key3 as string

Related Topics

- [SetDimSort method: CubeCollection class](#)

GetLayout method: CubeCollection class

Syntax

```
GetLayout(&SlicerArray, &RowAxisArray, &ColumnAxisArray)
```

Description

Use the GetLayout method to return the current layout for the three axes, (slice, row, and column) on the specified dimension.

Parameters

Parameter	Description
<i>&SlicerArray</i>	Specify an already instantiated array of string containing the list of fields used on the slice axis.
<i>&RowAxisArray</i>	Specify an already instantiated array of string containing the list of fields used on the row axis.
<i>&ColumnAxisArray</i>	Specify an already instantiated array of string containing the list of fields used on the column axis.

Returns

None.

GetRowCount method: CubeCollection class

Syntax

```
GetRowCount()
```

Description

Use the GetRowCount method to return the total number of rows in the cube collection.

The number of rows is a function of the hierarchy, that is, what is shown or not shown, and filtered values.

Parameters

None.

Returns

An integer.

Related Topics

- [GetDimension method: AnalyticModelDefn class](#)

GetSlice method: CubeCollection class

Syntax

```
GetSlice(&SliceRecord)
```

Description

Use the GetSlice method to return the current slice values of all the dimensions.

Parameters

Parameter	Description
<i>&SliceRecord</i>	Specify an already instantiated record object to hold the values of the slicer record.

Returns

None.

Related Topics

- [SetSlice method: CubeCollection class](#)

SetData method: CubeCollection class

Syntax

```
SetData(&DataRowset)
```

Description

Use the SetData method to populate the data in the cube collection with the data in the specified rowset.

The system extracts only changed values from the rowset, that is, values marked as updated. .

SetData method also writes the changes to the database for any record marked as writable or readable and writable in the analytic type definition, and mapped to the specified cube collection.

Parameters

Parameter	Description
<i>&DataRowset</i>	Specify the rowset object that contains the data you want to use to populate the cube collection.

Returns

None.

Related Topics

- [GetData method: CubeCollection class](#)

- [IsChanged property: Row class](#)
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

SetDimensionOrder method: CubeCollection class

Syntax

```
SetDimensionOrder(&FieldNames)
```

Description

Use the SetDimensionOrder method to specify the order of dimensions for this cube collection.

Parameters

Parameter	Description
<i>&FieldNames</i>	Specify an already instantiated array of string containing the field names that are the dimensions in the cube collection, in the order you want the dimensions.

Returns

None.

Related Topics

- [SetDimSort method: CubeCollectionDefn class](#)

SetDimFilter method: CubeCollection class

Syntax

```
SetDimFilter(DimName, DimFilter)
```

Description

Use the SetDimFilter method to set a dimension filter for the specified dimension in the cube collection.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension for which you want to specify a dimension filter.
<i>DimFilter</i>	Specify the name of the dimension filter (user function) that you want to use the dimension.

Returns

None.

Related Topics

- Analytic Calculation Engine: Understanding Dimensions

SetDimSort method: CubeCollection class

Syntax

```
SetDimSort(DimName, IsAscending [, Key1, IsAscending2, Key2, IsAscending3, Key3])
```

Description

Use the SetDimSort method to specify the sorting order for the cube collection.

Key1, *Key2* and *Key3* are optional parameters. If they are not specified, the sorting works as a name sort, that is, it sorts by the name of members in the given dimension, either in ascending or descending order.

If keys are specified, the keys values refer to the names of the cubes to be used as they key. The method orders the members of the dimension based on the value of the cubes for each member. The Boolean parameter *IsAscending* defines whether sorting should be in ascending or descending order. Up to three sort keys may be specified. *Key1* is the primary sort key. *Key2* is used to sub-sort any members that have the same key value under *Key1*, and so on.

The scope of this method is the same as the scope of the AnalyticModel object created in PeopleCode, that is, if the AnalyticModel object was declared with scope Global, this method would have a global scope as well, if it was declared as Local, it would have Local, and so on.

Specifying a null string for *DimName* or for keys one through three removes the current value as a sort value.

Parameters

Parameter	Description
<i>DimName</i>	Specify the dimension name that you would like sorted.
<i>IsAscending</i>	Specify if the sort order is ascending or descending. This parameter takes a Boolean value: true if the sort is ascending, false if it's descending.
<i>Key1</i>	Specify the name of a key field by which the sort should be ordered. If you do not specify keys, the sort is ordered by the names of the members in the given dimensions. If you do specify keys, the sort is order by the keys.
<i>IsAscending2</i>	Specify if the sort order for <i>Key1</i> is ascending or descending. This parameter takes a Boolean value: true if the sort is ascending, false if it's descending.
<i>Key2</i>	Specify the name of a key field to be used to sub-sort the primary key field <i>Key1</i> .
<i>IsAscending3</i>	Specify if the sort order for <i>Key2</i> is ascending or descending. This parameter takes a Boolean value: true if the sort is ascending, false if it's descending.

Parameter	Description
<i>Key3</i>	Specify the name of a key field to be used to sub-sort the primary key field <i>Key2</i> .

Returns

None.

SetSlice method: CubeCollection class

Syntax

```
SetSlice(&SliceRecord)
```

Description

Use the SetSlice method to specify a slice record for this cube collection.

Parameters

Parameter	Description
<i>&SliceRecord</i>	Specify an already instantiated record as the record to be used for the slice for the cube collection.

Returns

None.

Related Topics

- [GetSlice method: CubeCollection class](#)

ShowHierarchy method: CubeCollection class

Syntax

```
ShowHierarchy(DimName, Show, ExpandToLevel)
```

Description

Use the ShowHierarchy method to either hide or display the cube collection hierarchy.

If there is a tree attached to the dimension, and *Show* is false, only the detail level members are shown in the Analytic grid. If *Show* is true, all members including nodes are shown.

When the hierarchy is hidden, the GetData method returns only leaf values. When the hierarchy is displayed, GetData returns node values and leaf values.

The *ExpandToLevel* parameter expands the hierarchy to the level specified. Level indexes start from 0 , the root level.

For example, if you specify *ExpandToLevel* as 1, the grid displays the total (root member) and all the detail members in a dimension with no tree attached.

In the following example, if you specify *ExpandToLevel* as 2, the hierarchy would be displayed only to the quarter level, and not to the month level.

```
ALL_TIME
  2003
    Q1
      Jan
      Feb
      Mar
    Q2
      Apr
      May
      Jun
    Q3
      . . .
      . . .
    Q4
  2004
    Q1
    Q2
    Q3
    Q4
```

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension for which you want to either display or hide the hierarchy.
<i>Show</i>	Specify whether to display or hide the hierarchy. This parameter takes a Boolean value; true to display the hierarchy, false to hide it.
<i>ExpandToLevel</i>	Specify to what level to expand the hierarchy, as a number.

Returns

None.

Related Topics

- [CollapseNode method: CubeCollection class](#)
- [ExpandNode method: CubeCollection class](#)
- [GetData method: CubeCollection class](#)

UnsetDimFilter method: CubeCollection class

Syntax

UnsetDimFilter(*DimName*)

Description

Use the UnsetDimFilter method to remove the filter on the specified dimension for the cube collection.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension from which you want to remove the filter.

Returns

None.

Related Topics

- [SetDimFilter method: CubeCollection class](#)

UnsetDimSort method: CubeCollection class

Syntax

UnsetDimSort(*DimName*)

Description

Use the UnsetDimSort method to remove the sorting on the specified dimension for a cube collection. After using this method, the members are returned in the global member order as specified in the analytic model definition.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension from which you want to remove sorting.

Returns

None.

Related Topics

- [SetDimSort method: CubeCollection class](#)

CubeCollection Class Property

In this section we discuss the CubeCollection class property.

Messages property: CubeCollection class

Description

This property returns a multi-dimensional array of any containing the messages that occurred during execution of the GetData, SetData, and CalculateCube methods.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

After you access this property, only new messages are returned, that is, messages are only returned once.

This property is read-only.

Related Topics

- [GetData method: CubeCollection class](#)
- [SetData method: CubeCollection class](#)
- [CalculateCube method: AnalyticModel class](#)

Analytic Calculation Engine Metadata Classes

Understanding the PeopleSoft Analytic Calculation Engine Metadata Classes

PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

More specifically, developers create *analytic models* in order to define the rules which are used to calculate data. Developers also create PeopleSoft Pure Internet Architecture pages with *analytic grids* in order to display the data within PeopleSoft applications. End users view, analyze and make changes to this data. When end users save their changes, PeopleSoft Analytic Calculation Engine recalculates the data and saves the calculated data to the database.

PeopleCode enables developers to manipulate analytic calculation data as follows:

- Use the Analytic Calculation Engine classes to either retrieve or specify data in an instance of an analytic model loaded into the system, and also to calculate (or recalculate) cube values.
- Use the Analytic Calculation Engine metadata classes to manipulate an analytic model definition. For example, you can add cubes to a cube collection or rename an existing user function for a model.
- Use the Analytic Grid classes to manipulate the display of analytic calculation data on a page.
- Use the Analytic Type classes to manipulate an analytic type definition. For example, you can specify a new analytic model for an analytic type definition.

Important

The Analytic Calculation Engine Metadata classes are not supported on IBM z/OS and Linux for IBM System z platforms.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.
- [AnalyticGrid Class Methods](#)
In this section, we discuss the AnalyticGrid class methods. The methods are described in alphabetic order.

- [Using the Analytic Type Classes](#)
You can create analytic type definitions using Application Designer. PeopleSoft provides the analytic type classes for accessing these definitions at runtime.

Using the Analytic Calculation Engine Metadata Classes

You can create analytic model definitions using Application Designer. PeopleSoft provides the Analytic Calculation Engine Metadata classes for accessing these definitions at runtime.

You can also create an analytic model definition in PeopleCode, using the Create method, then saving it to the database using the Save method. After you save the definition, you can access it using Application Designer.

All of the primary objects (dimensions, cube collections, cubes, and so on) are instantiated from an analytic model object, so you only need to create an instance of the analytic model. You can also build a rule as an object instead of as a string.

Inserting and Deleting Objects

If you insert or delete an object from a group of objects, any existing object references are no longer valid. For example, if you use the DeleteCube method, any existing references to cube objects are no longer valid. You need to create any object references after using any insert or delete method.

Building a Rule as an Object

The RuleExpressions subpackage contains several classes. Each of these classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

The following example creates a cube that uses the Analytic Calculation Engine built-in function AT.

```
Function AT_Cube
  /** AT Cube Rule **/
  &Expected = "AT(GENERAL2, [GENERAL2:4], LOOKUPVALUES)";
  &CubeName = "AT";
  &FunCall = create PT_ANALYTICMODELDEFN:RuleExpressions:FunctionCall⇒
  (&Constants.FuncCall_Type_Builtin, &Constants.FuncCall_Builtin_AT);
  &Constant = create PT_ANALYTICMODELDEFN:RuleExpressions:Constant⇒
  (&Constants.Constant_Type_Literal, "GENERAL2");
  &FunCall.AddArgument(&Constant);
  &MemberRefArgument = create PT_ANALYTICMODELDEFN:RuleExpressions:⇒
  MemberReference("GENERAL2", "4");
  &FunCall.AddArgument(&MemberRefArgument);
  &CubeArgument = create
  PT_ANALYTICMODELDEFN:RuleExpressions:Cube("LOOKUPVALUES");
  &FunCall.AddArgument(&CubeArgument);
  &RuleDefn = create PT_ANALYTICMODELDEFN:RuleDefn("");
  &CubeDefn = &Model.GetCube(&CubeName);
  &RuleDefn.AddRuleExpression(&FunCall);
  &RuleDefn.GenerateRule();
  &CubeDefn.SetRule(&RuleDefn);
  If ( Not (Exact(&RuleDefn.RuleString, &Expected))) Then
```

```
&Model.Save();  
Error ("Rule Experession API Failed [Cube " | &CubeName | " Rule]");  
End-If;  
End-Function;
```

Error Handling

All the Analytic Calculation Engine Metadata classes throw PeopleCode exceptions for any fatal error that occurs in the execution of the operation. PeopleSoft recommends enclosing your analytic model programs in try-catch statements. This way, if your program catches the exception, the message set and message number that are associated with the exception object indicate the error.

Related Topics

- [Try-Catch Blocks](#)

The statements that immediately follow the try statement are called the *protected statements*. These are the only statements that are “protected” by the catch clauses in the try-catch blocks. The catch clauses in a try-catch block can be executed only if an exception is thrown by the protected statements. In addition, a catch clause is executed only when handling an exception that matches the type given on the catch. Any exceptions thrown by the catch clauses are not caught by their own try-catch block.

Data Types of the Analytic Calculation Engine Metadata Objects

Every PeopleSoft Analytic Calculation Engine metadata object is declared as its own data type, that is, AnalyticModelDefn objects are declared as type AnalyticModelDefn, CubeDefn objects are declared as type CubeDefn, and so on.

Scope of Analytic Calculation Engine Metadata Objects

The Analytic Calculation Engine Metadata objects can only be instantiated from PeopleCode.

These objects can be used anywhere you have PeopleCode, that is, in a Application Engine program, an application class, record field PeopleCode, and so on.

Analytic Calculation Engine Metadata objects can be of scope Local, Component or Global.

How to Import the Analytic Calculation Engine Metadata Classes

The Analytic Calculation Engine metadata classes are *not* built-in classes, like Rowset, Field, Record, and so on. They are application classes. Before you can use these classes in your PeopleCode program, you must import them to your program.

An import statement names either all the classes in a package or one particular application class. For importing the Analytic Calculation Engine metadata classes, PeopleSoft recommends that you import all the classes in the application package.

The application package PT_ANALYTICMODELDEFN contains the following subclasses:

- AnalyticModelDefn
- CubeCollectionDefn
- CubeDefn
- DimensionDefn

- ExplicitDimSet
- OrganizerDefn
- RuleDefn
- UserFunctionDefn

Additionally, there is a sub-application package, RuleExpressions, that contains classes used to build a rule as object instead of as a simple string. This package contains the following classes:

- Assignment
- Comparison
- Constant
- Constants
- Cube
- ExpressionBlock
- FunctionCall
- MemberReference
- Operation
- RuleExpression
- Variable

The import statements that you should use should be as follows:

```
import PT_ANALYTICMODELDEFN:*;  
import PT_ANALYTICMODELDEFN:RuleExpressions:*;
```

Using the asterisks after the package name makes all the application classes directly contained in the named package available.

Related Topics

- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

How to Create an Analytic Calculation Engine Metadata Class Object

After you've imported the Analytic Calculation Engine metadata classes, you need to instantiate an instance of the AnalyticModelDefn class, using the constructor for that class and the Create function. After you create the object, you must populate it using either the Get or Create method.

The following example creates an `AnalyticModelDefn` object from the `QE_ALLFUNCTION` analytic model definition.

```
import PT_ANALYTICMODELDEFN:*;  
  
Local AnalyticModelDefn &Model;  
  
&Model = create AnalyticModelDefn("QE_ALLFUNCTION");
```

Related Topics

- [Analytic Calculation Engine Metadata Classes Constructor](#)

You must use the constructor for the `AnalyticModelDefn` class to instantiate an instance of that class. All other metadata objects are instantiated from this class.

Analytic Calculation Engine Metadata Classes Constructor

You must use the constructor for the `AnalyticModelDefn` class to instantiate an instance of that class. All other metadata objects are instantiated from this class.

AnalyticModelDefn method: AnalyticModelDefn class

Syntax

```
AnalyticModelDefn(ModelName)
```

Description

Use the `AnalyticModelDefn` constructor to create an `AnalyticModelDefn` object.

Once the `AnalyticModelDefn` object is created, you can then execute either the `Get` or `Create` methods to 'instantiate' the model.

Note

The `Delete` and `Rename` methods can only be executed before a model is 'instantiated'.

Parameters

Parameter	Description
<i>ModelName</i>	Specify the name of an analytic model definition.

Returns

An `AnalyticModelDefn` object.

Example

```
&Model = create AnalyticModelDefn("QE_ALLFUNCTION");
```

Related Topics

- [AnalyticModelDefn Class](#)
Use the AnalyticModelDefn class to view or manipulate an analytic model definition that's already been created in Application Designer, or to create a new definition.

AnalyticModelDefn Class

Use the AnalyticModelDefn class to view or manipulate an analytic model definition that's already been created in Application Designer, or to create a new definition.

Related Topics

- [AnalyticModel Class Methods](#)
In this section, we discuss the AnalyticModel methods. The methods are discussed in alphabetical order.

AnalyticModelDefn Class Methods

The following section discusses the AnalyticModelDefn class methods. The methods are discussed in alphabetical order.

AddCube method: AnalyticModelDefn class

Syntax

AddCube(*CubeName*)

Description

Use the AddCube method to add a new cube to the analytic model definition. This method fails if the cube specified by *CubeName* already exists.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of a new cube that you want to add to the analytic model.

Returns

A CubeDefn object.

Related Topics

- [CopyCube method: AnalyticModelDefn class](#)
- [DeleteCube method: AnalyticModelDefn class](#)
- [GetCube method: AnalyticModelDefn class](#)
- [GetCubeNames method: AnalyticModelDefn class](#)
- [RenameCube method: AnalyticModelDefn class](#)

- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

AddCubeCollection method: AnalyticModelDefn class

Syntax

```
AddCubeCollection(CubeCollectionName)
```

Description

Use the AddCubeCollection method to add a new cube collection to the analytic model definition. This method fails if *CubeCollectionName* already exists.

Parameters

Parameter	Description
<i>CubeCollectionName</i>	Specify the name of a new cube collection that you want to add to the analytic model definition.

Returns

A CubeCollectionDefn object.

Related Topics

- [CopyCubeCollection method: AnalyticModelDefn class](#)
- [DeleteCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [RenameCubeCollection method: AnalyticModelDefn class](#)

AddDimension method: AnalyticModelDefn class

Syntax

```
AddDimension(DimName)
```

Description

Use the AddDimension method to add a new dimension to the analytic model. This method fails if the specified dimension already exists.

When you add a dimension to a cube, the dimension is also automatically added to any cube collections that already contain the cube.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension you want to add. This must be a new dimension.

Returns

A DimensionDef object.

Related Topics

- [CopyDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [GetDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)

Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

AddExplicitDimensionSet method: AnalyticModelDefn class

Syntax

```
AddExplicitDimensionSet(ExplicitDimSetName)
```

Description

Use the AddExplicitDimensionSet method to add a new explicit dimension set to the analytic model. This method fails if the specified explicit dimension set already exists.

Parameters

Parameter	Description
<i>ExplicitDimSetName</i>	Specify the name of the explicit dimension you want to add. This must be a new explicit dimension.

Returns

An ExplicitDimensionSet object.

Related Topics

- [GetExplicitDimensionSet method: AnalyticModelDefn class](#)
- [DeleteExplicitDimensionSet method: AnalyticModelDefn class](#)
- [CopyExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSetNames method: AnalyticModelDefn class](#)
- [RenameExplicitDimensionSet method: AnalyticModelDefn class](#)

AddOrganizer method: AnalyticModelDefn class

Syntax

```
AddOrganizer(OrganizerName)
```

Description

Use the AddOrganizer method to add a new organizer to the analytic model. This method fails if the organizer specified by *OrganizerName* already exists.

Parameters

Parameter	Description
<i>OrganizerName</i>	Specify the name of the organizer you want to add.

Returns

An OrganizerDefn object.

Related Topics

- [DeleteOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizerNames method: AnalyticModelDefn class](#)
- [RenameOrganizer method: AnalyticModelDefn class](#)
- [OrganizerDefn Class](#)
Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

AddUserFunction method: AnalyticModelDefn class

Syntax

```
AddUserFunction(UserFunctionName)
```

Description

Use the AddUserFunction method to add a new user function to the analytic model. This method fails if the user function specified by *UserFunction* already exists.

Parameters

Parameter	Description
<i>UserFunctionName</i>	Specify the name of the new user function that you want to add.

Returns

A UserFunction object.

Related Topics

- [CopyUserFunction method: AnalyticModelDefn class](#)
- [DeleteUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunction method: AnalyticModelDefn class](#)

- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [RenameUserFunction method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

CopyCube method: AnalyticModelDefn class

Syntax

`CopyCube(CubeName, NewCubeName)`

Description

Use the CopyCube method to copy the specified cube to the new cube. This method fails if the cube specified by *CubeName* already exists.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that you want to copy.
<i>NewCubeName</i>	Specify the name of the new cube that you want to create.

Returns

A CubeDefn object.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)
- [AddCube method: AnalyticModelDefn class](#)
- [GetCube method: AnalyticModelDefn class](#)
- [GetCubeNames method: AnalyticModelDefn class](#)
- [RenameCube method: AnalyticModelDefn class](#)
- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

CopyCubeCollection method: AnalyticModelDefn class

Syntax

`CopyCubeCollection(CubeCollectionName, NewCubeCollectionName)`

Description

Use the CopyCubeCollection method to copy the specified cube collection to a new collection. If the new cube collection specified by *NewCubeCollectionName* already exists, this method fails.

Parameters

Parameter	Description
<i>CubeCollectionName</i>	Specify the name of the cube collection that you want to copy.
<i>NewCubeCollectionName</i>	Specify the name you want for the new cube collection.

Returns

A CubeCollectionDefn object.

Related Topics

- [AddCubeCollection method: AnalyticModelDefn class](#)
- [DeleteCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollectionNames method: AnalyticModelDefn class](#)
- [RenameCubeCollection method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)

Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

CopyDimension method: AnalyticModelDefn class

Syntax

```
CopyDimension(DimName, NewDimName)
```

Description

Use the CopyDimension method to copy the dimension specified by *DimName* to a new dimension. If the dimension specified by *NewDimName* already exists, this method fails.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to copy.
<i>NewDimName</i>	Specify the name of the new dimension that you want the data copied to.

Returns

A DimensionDefn object.

Related Topics

- [AddDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [RenameDimension method: AnalyticModelDefn class](#)

CopyExplicitDimensionSet method: AnalyticModelDefn class

Syntax

```
CopyExplicitDimensionSet(ExplicitDimSetName, NewExplicitDimSetName)
```

Description

Use the CopyExplicitDimensionSet method to copy the explicit dimension set specified by *ExplicitDimSetName* to a new explicit dimension set. If the explicit dimension set specified by *NewExplicitDimSetName* already exists, this method fails.

Parameters

Parameter	Description
<i>ExplicitDimSetName</i>	Specify the name of the explicit dimension set that you want to copy.
<i>NewExplicitDimSetName</i>	Specify the name of the new explicit dimension set that you want the data copied to.

Returns

An ExplicitDimensionSet object.

Related Topics

- [RenameExplicitDimensionSet method: AnalyticModelDefn class](#)
- [AddExplicitDimensionSet method: AnalyticModelDefn class](#)
- [DeleteExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSetNames method: AnalyticModelDefn class](#)

CopyTo method: AnalyticModelDefn class

Syntax

```
CopyTo(NewModelName)
```

Description

Use the CopyTo method to copy the AnalyticModelDefn object to a new analytic model specified by *NewModelName*. If the model set specified by *NewModelName* already exists, this method fails.

Parameters

Parameter	Description
<i>NewModelName</i>	Specify the name of a new analytic model definition that you want to create.

Returns

An AnalyticModelDefn object.

Related Topics

- [Create method: AnalyticModelDefn class](#)
- [Delete method: AnalyticModelDefn class](#)
- [Get method: AnalyticModelDefn class](#)
- [Rename method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)

CopyUserFunction method: AnalyticModelDefn class

Syntax

```
CopyUserFunction(UserFunctionName, NewUserFunctionName)
```

Description

Use the CopyUserFunction method to copy the user function specified by *UserFunctionName* to a new user function. If the user function specified by *NewUserFunctionName* already exists, this method fails.

Parameters

Parameter	Description
<i>UserFunctionName</i>	Specify the name of the user function that you want to copy.
<i>NewUserFunctionName</i>	Specify the name of the new user function that you want to add.

Returns

A UserFunctionDefn object.

Related Topics

- [AddUserFunction method: AnalyticModelDefn class](#)
- [DeleteUserFunction method: AnalyticModelDefn class](#)

- [GetUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [RenameUserFunction method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

Create method: AnalyticModelDefn class

Syntax

Create()

Description

Use the Create method to create, and instantiate, a new model. If you save the new model after you create it, you can then access it in Application Designer as an analytic model definition.

If the model already exists, an exception is thrown.

Parameters

None.

Returns

None.

Related Topics

- [CopyTo method: AnalyticModelDefn class](#)
- [Delete method: AnalyticModelDefn class](#)
- [Get method: AnalyticModelDefn class](#)
- [Rename method: AnalyticModelDefn class](#)

Delete method: AnalyticModelDefn class

Syntax

Delete()

Description

Use the Delete method to delete the analytic model executing the method.

You can only use this method on a *closed* analytic model definition, that is, before you use a Get or Create method.

 Warning

The delete occurs immediately, that is, the analytic model definition is removed from the database. Only use this method if you're certain you want to delete the definition.

If this model is used by any existing analytic type definition, this method fails.

Parameters

None.

Returns

None.

Related Topics

- [CopyTo method: AnalyticModelDefn class](#)
- [Create method: AnalyticModelDefn class](#)
- [Get method: AnalyticModelDefn class](#)
- [Rename method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)

DeleteCube method: AnalyticModelDefn class

Syntax

```
DeleteCube(CubeName, ForceDelete)
```

Description

Use the DeleteCube method to delete the cube specified by *CubeName*.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube you want to delete from the analytic model.
<i>ForceDelete</i>	Specify if the cube should always be deleted. This parameter takes a Boolean value. If you specify <i>ForceDelete</i> as false, and the cube is used by another part (such as a cube collection) this method fails. If you specify <i>ForceDelete</i> as true, and the cube is used by another part, the cube is still deleted.

Returns

None.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)

- [GetCube method: AnalyticModelDefn class](#)
- [GetCubeNames method: AnalyticModelDefn class](#)
- [RenameCube method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

DeleteCubeCollection method: AnalyticModelDefn class

Syntax

DeleteCubeCollection(*CubeCollectionName*, *ForceDelete*)

Description

Use the DeleteCubeCollection method to delete the cube collection specified by *CubeCollectionName*.

Parameters

Parameter	Description
<i>CubeCollectionName</i>	Specify the name of the cube collection that you want to delete from the analytic model.
<i>ForceDelete</i>	Specify if the cube collection should always be deleted. This parameter takes a Boolean value. If you specify <i>ForceDelete</i> as false, and the cube collection is used by another part (such as an Organizer), this method fails. If you specify <i>ForceDelete</i> as true, and the cube collection is used by another part, the cube collection is still deleted.

Returns

None.

Related Topics

- [AddCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollectionNames method: AnalyticModelDefn class](#)
- [RenameCubeCollection method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

DeleteDimension method: AnalyticModelDefn class

Syntax

```
DeleteDimension(DimensionName, ForceDelete)
```

Description

Use the DeleteDimension method to delete the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension you want to delete.
<i>ForceDelete</i>	Specify if the dimension should always be deleted. This parameter takes a Boolean value. If you specify <i>ForceDelete</i> as false, and the dimension is used by another part (such as a cube), this method fails. If you specify <i>ForceDelete</i> as true, and the dimension is used by another part, the dimension is still deleted.

Returns

None.

Related Topics

- [AddDimension method: AnalyticModelDefn class](#)
- [CopyDimension method: AnalyticModelDefn class](#)
- [GetDimension method: AnalyticModelDefn class](#)
- [GetDimensionNames method: AnalyticModelDefn class](#)
- [RenameDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)

Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

DeleteExplicitDimensionSet method: AnalyticModelDefn class

Syntax

```
DeleteExplicitDimensionSet(ExplicitDimensionSetName, ForceDelete)
```

Description

Use the DeleteExplicitDimensionSet method to delete the explicit dimension set specified by *ExplicitDimensionSetName*.

Parameters

Parameter	Description
<i>ExplicitDimensionSetName</i>	Specify the name of the explicit dimension set you want to delete.
<i>ForceDelete</i>	The value of this parameter is ignored in the current release.

Returns

None.

Related Topics

- [AddExplicitDimensionSet method: AnalyticModelDefn class](#)
- [CopyExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSetNames method: AnalyticModelDefn class](#)
- [RenameExplicitDimensionSet method: AnalyticModelDefn class](#)

DeleteOrganizer method: AnalyticModelDefn class

Syntax

DeleteOrganizer(*OrganizerName*, *ForceDelete*)

Description

Use the DeleteOrganizer method to delete the organizer specified by *OrganizerName*.

Parameters

Parameter	Description
<i>OrganizerName</i>	Specify the name of the organizer you want to delete.
<i>ForceDelete</i>	This value is ignored in the current release.

Returns

None.

Related Topics

- [AddOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizerNames method: AnalyticModelDefn class](#)
- [RenameOrganizer method: AnalyticModelDefn class](#)

- [OrganizerDefn Class](#)
Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

DeleteUserFunction method: AnalyticModelDefn class

Syntax

DeleteUserFunction(*UserFunctionName*, *ForceDelete*)

Description

Use the DeleteUserFunction method to delete the user function specified by *UserFunctionName*.

Parameters

Parameter	Description
<i>UserFunctionName</i>	Specify the name of the user function you want to delete.
<i>ForceDelete</i>	Specify if the user function should always be deleted. This parameter takes a Boolean value. If you specify <i>ForceDelete</i> as false, and the user function is used by another part, this method fails. If you specify <i>ForceDelete</i> as true, and the user function is used by another part, the user function is still deleted.

Returns

None.

Related Topics

- [AddUserFunction method: AnalyticModelDefn class](#)
- [CopyUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [RenameUserFunction method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

Get method: AnalyticModelDefn class

Syntax

Get()

Description

Use the Get method to instantiate an instance of the analytic model.

If the model doesn't exist, an exception is thrown.

Parameters

None.

Returns

None.

Related Topics

- [CopyTo method: AnalyticModelDefn class](#)
- [Create method: AnalyticModelDefn class](#)
- [Delete method: AnalyticModelDefn class](#)
- [Rename method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)

GetCube method: AnalyticModelDefn class

Syntax

```
GetCube(CubeName)
```

Description

Use the GetCube method to return a reference to the cube specified by *CubeName*. This method fails if the cube specified by *CubeName* doesn't exist.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that you want a reference to.

Returns

A CubeDefn object.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)
- [CopyCube method: AnalyticModelDefn class](#)
- [DeleteCube method: AnalyticModelDefn class](#)
- [GetCubeNames method: AnalyticModelDefn class](#)
- [RenameCube method: AnalyticModelDefn class](#)

- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

GetCubeCollection method: AnalyticModelDefn class

Syntax

```
GetCubeCollection(CubeCollectionName)
```

Description

Use the GetCubeCollection method to return a reference to a cube collection. This method fails if the cube collection specified by *CubeCollectionName* doesn't exist.

Parameters

Parameter	Description
<i>CubeCollection</i>	Specify the name of the cube collection you want a reference to.

Returns

A CubeCollectionDefn object.

Related Topics

- [AddCubeCollection method: AnalyticModelDefn class](#)
- [CopyCubeCollection method: AnalyticModelDefn class](#)
- [DeleteCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollectionNames method: AnalyticModelDefn class](#)
- [RenameCubeCollection method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

GetCubeCollectionNames method: AnalyticModelDefn class

Syntax

```
GetCubeCollectionNames()
```

Description

Use the GetCubeCollectionNames method to return an array of strings containing all the names of the cube collections associated with this analytic model.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddCubeCollection method: AnalyticModelDefn class](#)
- [CopyCubeCollection method: AnalyticModelDefn class](#)
- [DeleteCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [RenameCubeCollection method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:
- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetCubeNames method: AnalyticModelDefn class

Syntax

```
GetCubeNames( )
```

Description

Use the GetCubeNames method to return an array of strings containing all the names of the cubes associated with this analytic model.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)
- [CopyCube method: AnalyticModelDefn class](#)
- [DeleteCube method: AnalyticModelDefn class](#)
- [GetCube method: AnalyticModelDefn class](#)

- [RenameCube method: AnalyticModelDefn class](#)
- [CubeCollectionDefn Class](#)
Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:
- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetDimension method: AnalyticModelDefn class

Syntax

GetDimension(*DimName*)

Description

Use the GetDimension method to return a reference to the dimension specified by *DimName*. This method fails if the dimension specified by *DimName* doesn't exist.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want a reference to.

Returns

A DimensionDefn object.

Related Topics

- [AddDimension method: AnalyticModelDefn class](#)
- [CopyDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [GetDimensionNames method: AnalyticModelDefn class](#)
- [RenameDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

GetDimensionNames method: AnalyticModelDefn class

Syntax

```
GetDimensionNames()
```

Description

Use the GetDimensionNames method to return an array of string containing the names of all the dimensions associated with the analytic model.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddDimension method: AnalyticModelDefn class](#)
- [CopyDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [GetDimension method: AnalyticModelDefn class](#)
- [RenameDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:
- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetExplicitDimensionSet method: AnalyticModelDefn class

Syntax

```
GetExplicitDimensionSet(ExplicitDimSetName)
```

Description

Use the GetExplicitDimensionSet method to return a reference to the explicit dimension set specified by *ExplicitDimSetName*. This method fails if the explicit dimension set specified by *ExplicitDimSetName* doesn't exist.

Parameters

Parameter	Description
<i>ExplicitDimSetName</i>	Specify the name of the explicit dimension set that you want a reference to.

Returns

An ExplicitDimensionSet object.

Related Topics

- [AddExplicitDimensionSet method: AnalyticModelDefn class](#)
- [CopyExplicitDimensionSet method: AnalyticModelDefn class](#)
- [DeleteExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSetNames method: AnalyticModelDefn class](#)

GetExplicitDimensionSetNames method: AnalyticModelDefn class

Syntax

```
GetExplicitDimensionSetNames()
```

Description

Use the GetExplicitDimensionSetNames method to return an array of string containing the names of all the explicit dimension sets associated with the analytic model.

Parameters

None.

Returns

An array of strings.

Related Topics

- [ExplicitDimensionSet Class](#)
Use the ExplicitDimensionSet class to access an explicit dimension set associated with an analytic model. You instantiate an object of this class using one of the following AnalyticModelDefn methods:

GetOrganizer method: AnalyticModelDefn class

Syntax

```
GetOrganizer(OrganizerName)
```

Description

Use the GetOrganizer method to return a reference to the organizer specified by *OrganizerName*. This method fails if the organizer specified by *OrganizerName* doesn't exist.

Parameters

Parameter	Description
<i>OrganizerName</i>	Specify the name of the organizer you want a reference to.

Returns

An OrganizerDefn object.

Related Topics

- [AddOrganizer method: AnalyticModelDefn class](#)
- [DeleteOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizerNames method: AnalyticModelDefn class](#)
- [RenameOrganizer method: AnalyticModelDefn class](#)
- [OrganizerDefn Class](#)
Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

GetOrganizerNames method: AnalyticModelDefn class

Syntax

```
GetOrganizerNames()
```

Description

Use the GetOrganizerNames method to return an array of string containing the names of all the organizers associated with the analytic model.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddOrganizer method: AnalyticModelDefn class](#)
- [DeleteOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizer method: AnalyticModelDefn class](#)
- [RenameOrganizer method: AnalyticModelDefn class](#)
- [OrganizerDefn Class](#)
Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetUserFunction method: AnalyticModelDefn class

Syntax

```
GetUserFunction(UserFunctionName)
```

Description

Use the GetUserFunction method to return a reference to the user function specified by *UserFunctionName*. This method fails if the user function specified by *UserFunctionName* doesn't exist.

Parameters

Parameter	Description
<i>UserFunctionName</i>	Specify the name of a user function that you want a reference to.

Returns

A UserFunctionDefn object

Related Topics

- [AddUserFunction method: AnalyticModelDefn class](#)
- [CopyUserFunction method: AnalyticModelDefn class](#)
- [DeleteUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [RenameUserFunction method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

GetUserFunctionNames method: AnalyticModelDefn class

Syntax

```
GetUserFunctionNames()
```

Description

Use the GetUserFunctionNames method to return an array of string containing the names of all the user functions associated with the analytic model.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddUserFunction method: AnalyticModelDefn class](#)
- [CopyUserFunction method: AnalyticModelDefn class](#)
- [DeleteUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunction method: AnalyticModelDefn class](#)
- [RenameUserFunction method: AnalyticModelDefn class](#)

- [UserFunctionDefn Class](#)

Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

Rename method: AnalyticModelDefn class

Syntax

```
Rename(NewModelName)
```

Description

Use the Rename method to rename the analytic model.

You can only use this method on a *closed* analytic model definition, that is, before you use a Get or Create method.

Parameters

Parameter	Description
<i>NewModelName</i>	Specify the new name of the model.

Returns

None.

Related Topics

- [Create method: AnalyticModelDefn class](#)
- [Get method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)

RenameCube method: AnalyticModelDefn class

Syntax

```
RenameCube(CubeName, NewCubeName, ForceRename)
```

Description

Use the RenameCube method to rename the cube specified by *CubeName* to *NewCubeName*.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube you want to rename.
<i>NewCubeName</i>	Specify the new name for the cube.
<i>ForceRename</i>	Specify if the cube should always be renamed. This parameter takes a Boolean value. If you specify <i>ForceRename</i> as false, and the cube is used by another part (such as a cube collection) this method fails. If you specify <i>ForceRename</i> as true, and the cube is used by another part, the cube is still renamed.

Returns

None.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)
- [CopyCube method: AnalyticModelDefn class](#)
- [DeleteCube method: AnalyticModelDefn class](#)
- [GetCube method: AnalyticModelDefn class](#)
- [GetCubeNames method: AnalyticModelDefn class](#)
- [CubeDefn Class](#)

Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

RenameCubeCollection method: AnalyticModelDefn class

Syntax

```
RenameCubeCollection(CubeCollectionName, NewCubeCollectionName, ForceRename)
```

Description

Use the `RenameCubeCollection` method to rename the cube collection specified by *CubeCollectionName* to the new name *NewCubeCollectionName*.

Parameters

Parameter	Description
<i>CubeCollectionName</i>	Specify the name of the cube collection that you want to rename.
<i>NewCubeCollectionName</i>	Specify the new name of the cube collection.
<i>ForceRename</i>	Specify if the cube collection should always be renamed. This parameter takes a Boolean value. If you specify <i>ForceRename</i> as false, and the cube collection is used by another part (such as an organizer) this method fails. If you specify <i>ForceRename</i> as true, and the cube collection is used by another part, the cube collection is still renamed.

Returns

None.

Related Topics

- [AddCubeCollection method: AnalyticModelDefn class](#)
- [CopyCubeCollection method: AnalyticModelDefn class](#)
- [DeleteCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollection method: AnalyticModelDefn class](#)
- [GetCubeCollectionNames method: AnalyticModelDefn class](#)
- [GetCubeCollectionNames method: AnalyticModelDefn class](#)

RenameDimension method: AnalyticModelDefn class

Syntax

```
RenameDimension(DimName, NewDimName, ForceRename)
```

Description

Use the `RenameDimension` method to rename the dimension specified by *DimName* to the new name *NewDimName*.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension you want to rename.
<i>NewDimName</i>	Specify the new name of the dimension.
<i>ForceRename</i>	Specify if the dimension should always be renamed. This parameter takes a Boolean value. If you specify <i>ForceRename</i> as false, and the dimension is used by another part (such as a cube) this method fails. If you specify <i>ForceRename</i> as true, and the dimension is used by another part, the dimension is still renamed.

Returns

None.

Related Topics

- [AddDimension method: AnalyticModelDefn class](#)
- [CopyDimension method: AnalyticModelDefn class](#)
- [DeleteDimension method: AnalyticModelDefn class](#)
- [GetDimension method: AnalyticModelDefn class](#)
- [GetDimensionNames method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

RenameExplicitDimensionSet method: AnalyticModelDefn class

Syntax

```
RenameExplicitDimensionSet(ExplicitDimSetName, NewExplicitDimSetName,  
ForceRename)
```

Description

Use the RenameExplicitDimensionSet method to rename the explicit dimension set specified by *ExplicitDimSetName* to the new name *NewExplicitDimSetName*.

Parameters

Parameter	Description
<i>ExplicitDimSetName</i>	Specify the name of the explicit dimension set you want to rename.
<i>NewExplicitDimSetName</i>	Specify the new name of the explicit dimension set.

Parameter	Description
<i>ForceRename</i>	The value for this parameter is ignored in the current release.

Returns

None.

Related Topics

- [AddExplicitDimensionSet method: AnalyticModelDefn class](#)
- [CopyExplicitDimensionSet method: AnalyticModelDefn class](#)
- [DeleteExplicitDimensionSet method: AnalyticModelDefn class](#)
- [GetExplicitDimensionSet method: AnalyticModelDefn class](#)
- [RenameExplicitDimensionSet method: AnalyticModelDefn class](#)

RenameOrganizer method: AnalyticModelDefn class

Syntax

```
RenameOrganizer(OrganizerName, NewOrganizerName, ForceRename)
```

Description

Use the RenameOrganizer method to rename the organizer specified by *OrganizerName* to the new name *NewOrganizerName*.

Parameters

Parameter	Description
<i>OrganizerName</i>	Specify the name of the organizer you want to rename.
<i>NewOrganizerName</i>	Specify the new name for the organizer.
<i>ForceRename</i>	The value for this parameter is ignored in the current release.

Returns

None.

Related Topics

- [AddOrganizer method: AnalyticModelDefn class](#)
- [DeleteOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizer method: AnalyticModelDefn class](#)
- [GetOrganizerNames method: AnalyticModelDefn class](#)
- [OrganizerDefn Class](#)
Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

RenameUserFunction method: AnalyticModelDefn class

Syntax

```
RenameUserFunction(UserFunctionName, NewUserFunctionName, ForceRename)
```

Description

Use the `RenameUserFunction` method to rename the user function specified by *UserFunctionName* to the new name *NewUserFunctionName*.

Parameters

Parameter	Description
<i>UserFunctionName</i>	Specify the name of the user function you want to rename.
<i>NewUserFunctionName</i>	Specify the new name for the user function.
<i>ForceRename</i>	Specify if the user function should always be renamed. This parameter takes a Boolean value. If you specify <i>ForceRename</i> as false, and the user function is used by another part this method fails. If you specify <i>ForceRename</i> as true, and the user function is used by another part, the user function is still renamed.

Returns

None.

Related Topics

- [AddUserFunction method: AnalyticModelDefn class](#)
- [CopyUserFunction method: AnalyticModelDefn class](#)
- [DeleteUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunction method: AnalyticModelDefn class](#)
- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the `UserFunctionDefn` class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following `AnalyticModelDefn` class methods:

Save method: AnalyticModelDefn class

Syntax

```
Save( )
```


Description

Use the Save method to save any changes to the analytic model definition to the database. If the saved model is valid, the value of the IsValid property is set to true, if it is not valid, it is set to false.

The Messages property is populate with messages from the validation that occurs with the save.

Parameters

None.

Returns

None.

Related Topics

- [Create method: AnalyticModelDefn class](#)
- [Validate method: AnalyticModelDefn class](#)
- [IsValid property: AnalyticModelDefn class](#)
- [Messages property: AnalyticModelDefn class](#)

Validate method: AnalyticModelDefn class

Syntax

```
Validate()
```

Description

Use the Validate method to validate the analytic model definition. This method returns true if the model successfully validates. If this method returns false, the detailed error messages are available through the Messages property.

The IsValid property is not set with this method. The Save method sets the IsValid property.

Parameters

None.

Returns

A Boolean value: true if the analytic model definition validates successfully, false otherwise.

Related Topics

- [Create method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)
- [Messages property: AnalyticModelDefn class](#)
- [IsValid property: AnalyticModelDefn class](#)

AnalyticModelDefn Properties

The following section discusses the AnalyticModelDefn class properties. The properties are discussed in alphabetical order.

CircularFormulaWarn property: AnalyticModelDefn class

Description

Use this property to specify whether warnings occur when there are circular dependencies as rules are added. This property takes a Boolean value: true if warnings should occur, false otherwise. The default value for this property is false.

This property is read/write.

Description property: AnalyticModelDefn class

Description

Use this property to specify the description of the analytic model. This property takes a string value.

This property is read/write.

IsValid property: AnalyticModelDefn class

Description

This property indicates if the analytic model is valid, that is, if it would successfully load.

This property is read-only.

Related Topics

- [Validate method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)
- Analytic Calculation Engine: Validating Analytic Models

LongDescription property: AnalyticModelDefn class

Description

Use this property to specify the long description of the analytic model definition. This property takes a string value.

This property is read/write.

MaxDelta property: AnalyticModelDefn class

Description

This property specifies the maximum number of value changes for the analytic model

This property takes a float value. The default value is 0.

This property is read/write.

Related Topics

- [Analytic Calculation Engine: Understanding the Analytic Model Definition Creation Process](#)

MaxIterations property: AnalyticModelDefn class

Description

Use this property to specify the maximum number of iterations for the analytic model.

This property take an integer value. The default value is 100.

This property is read/write.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

Messages property: AnalyticModelDefn class

Description

This property returns a multi-dimensional array of any that contains the messages that occurred during execution of the Validate or Save methods. This array is only populated after the Validate or Save method has completed successfully.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

This property is read-only.

Related Topics

- [Validate method: AnalyticModelDefn class](#)
- [Save method: AnalyticModelDefn class](#)

Name property: AnalyticModelDefn class

Description

This property indicates the name of the analytic model.

This property is read-only.

Related Topics

- [Rename method: AnalyticModelDefn class](#)

ResolveCircularDeps property: AnalyticModelDefn class

Description

Use this property to specify if the analytic model should resolve circular dependencies through iteration. This property takes a Boolean value: true if the dependencies should be resolved, false otherwise. The default value is false.

This property is read/write.

DimensionDefn Class

Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

- AddDimension
- CopyDimension
- GetDimension

DimensionDefn Class Properties

The following section discusses the DimensionDefn class properties. The properties are discussed in alphabetical order.

AggregateSequence property: DimensionDefn class

Description

This property indicates the sequence number of this dimension used during aggregation of the analytic model

This property is read-only..

AggregationUserFunction property: DimensionDefn class

Description

Use this property to specify the name of a user function that can be used to override the default aggregation for this dimension.

This property is read/write.

Comments property: DimensionDefn class

Description

Use this property to specify additional notes about the dimension.

This property is read/write.

Name property: DimensionDefn class

Description

This property indicates the name of the dimension.

This property is read-only.

Related Topics

- [GetDimensionNames method: AnalyticModelDefn class](#)
- [RenameDimension method: AnalyticModelDefn class](#)

TotalMemberName property: DimensionDefn class

Description

Use this property to specify a field value that is used at runtime to host the total value for this dimension. If a total isn't applicable, this property has no value.

This property is read/write.

ExplicitDimensionSet Class

Use the ExplicitDimensionSet class to access an explicit dimension set associated with an analytic model. You instantiate an object of this class using one of the following AnalyticModelDefn methods:

- AddExplicitDimensionSet
- CopyExplicitDimensionSet
- GetExplicitDimensionSet

You can also use the GetExplicitDimensionSetNames to return an array containing the names of all the explicit dimension sets associated with the analytic model.

ExplicitDimensionSet Methods

The following section discusses the ExplicitDimensionSet class methods. The methods are discussed in alphabetical order.

AttachDimension method: ExplicitDimensionSet class

Syntax

```
AttachDimension(DimName)
```

Description

Use the AttachDimension method to attach a dimension to an explicit dimension set.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension you want to attach.

Returns

None.

Related Topics

- [DetachDimension method: ExplicitDimensionSet class](#)

DetachDimension method: ExplicitDimensionSet class

Syntax

```
DetachDimension(DimName)
```

Description

Use the DetachDimension method to detach a dimension from an explicit dimension set.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to detach.

Returns

None.

Related Topics

- [AttachDimension method: ExplicitDimensionSet class](#)

GetDimensionNames method: ExplicitDimensionSet class

Syntax

```
GetDimensionNames()
```

Description

Use the GetDimensionNames method to return an array of string that contains the names of all the dimensions associated with the ExplicitDimensionSet.

Parameters

None.

Returns

An array of string.

Related Topics

- [AttachDimension method: ExplicitDimensionSet class](#)
- [DetachDimension method: ExplicitDimensionSet class](#)

ExplicitDimensionSet Properties

The following section discusses the ExplicitDimensionSet class properties. The properties are discussed in alphabetical order.

Name property: ExplicitDimensionSet class

Description

The Name property returns the name of the explicit dimension set as a string.

This property is read-only.

SequenceNumber property: ExplicitDimensionSet class

Description

This property returns the sequence number of the explicit dimension set.

This property is read-only.

CubeDefn Class

Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

- AddCubeDefn
- CopyCubeDefn
- GetCubeDefn

CubeDefn Class Methods

The following section discusses the CubeDefn class methods. The methods are discussed in alphabetical order.

AttachDimension method: CubeDefn class

Syntax

```
AttachDimension(DimName)
```

Description

Use the AttachDimension method to attach an existing dimension specified by *DimName* to the cube.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to add.

Returns

None.

Related Topics

- [DetachDimension method: CubeDefn class](#)
- [GetDimensionNames method: CubeDefn class](#)
- [UsesDimension method: CubeDefn class](#)
- [AddDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

DetachDimension method: CubeDefn class

Syntax

```
DetachDimension(DimName)
```

Description

Use the DetachDimension method to detach the dimension specified by *DimName* from the cube.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to detach from the cube.

Returns

None.

Related Topics

- [AttachDimension method: CubeDefn class](#)
- [GetDimensionNames method: CubeDefn class](#)
- [UsesDimension method: CubeDefn class](#)

- [AddDimension method: AnalyticModelDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

GetCauses method: CubeDefn class

Syntax

GetCauses(*CauseType*)

Description

Any cube that affects another cube is a *cause* of that cube. Use the GetCauses method to return a list of all the other cubes that are the causes for this cube.

The cube names are returned in an array of string.

Parameters

Parameter	Description
<i>CauseType</i>	Specify the type of causes you want returned.

Value	Description
AnalyticModel_DirectCauses	Only return direct causes.
AnalyticModel_AllCauses	Return all cubes that are causes for this cube, both direct and indirect.
AnalyticModel_AllInputs	Return all cubes that have input to this cube.

Returns

An array of string.

Related Topics

- [GetEffects method: CubeDefn class](#)
- [GetCircularDeps method: CubeDefn class](#)
- Analytic Calculation Engine: Understanding Causes and Inputs

GetCircularDeps method: CubeDefn class

Syntax

GetCircularDeps(*DimName*)

Description

Use the GetCircularDeps method to return all cubes that have circular dependencies based on the dimension specified by *DimName*.

The cube names are returned in an array of string.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to find circular dependencies for.

Returns

An array of string.

Related Topics

- [GetCauses method: CubeDefn class](#)
- [GetEffects method: CubeDefn class](#)

GetDimensionAggregate method: CubeDefn class

Syntax

GetDimensionAggregate(*DimName*)

Description

Use the GetDimensionAggregate method to return the name of the user function used for the aggregate for the dimension specified by *DimName*.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want the aggregate user function.

Returns

A string.

Related Topics

- [SetDimensionAggregate method: CubeDefn class](#)
- [GetUserFunctionNames method: AnalyticModelDefn class](#)
- [UserFunctionDefn Class](#)
Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

GetEffects method: CubeDefn class

Syntax

GetEffects(*EffectType*)

Description

Any cube that is affected by another cube is an *effect* of that cube. Use the GetEffects method to return a list of all the cubes affected by this cube.

The list of cubes is returned as an array of string.

Parameters

Parameter	Description
<i>EffectType</i>	Specify the type of effects you want returned.

Value	Description
AnalyticModel_DirectEffects	Only return cubes that are a direct effect on this cube.
AnalyticModel_AllEffects	Return all cubes that are an effect on this cube.

Returns

An array of string.

Related Topics

- [GetCauses method: CubeDefn class](#)
- [GetCircularDeps method: CubeDefn class](#)
- [CubeDefn Class Properties](#)
The following section discusses the CubeDefn class properties. The properties are discussed in alphabetical order.

GetDimensionNames method: CubeDefn class

Syntax

```
GetDimensionNames()
```

Description

Use the GetDimensionNames method to return an array of string containing the names of all the dimensions associated with the cube.

Parameters

None.

Returns

An array of string.

Related Topics

- [AttachDimension method: CubeDefn class](#)
- [DetachDimension method: CubeDefn class](#)

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetRule method: CubeDefn class

Syntax

GetRule()

Description

Use the GetRule method to get a reference to a RuleDefn object that represents the rule for this cube.

Parameters

None.

Returns

A RuleDefn object.

Related Topics

- [RuleDefn Class](#)
Use the RuleDefn class to access a rule that is associated with an analytic model. You instantiate an object of this class using the GetRule method for both the CubeDefn and UserFunctionDefn classes.
- [SetRule method: CubeDefn class](#)

SetDimensionAggregate method: CubeDefn class

Syntax

SetDimensionAggregate(*DimName*, *UserFunctionName*)

Description

Use the SetDimensionAggregate method to specify the user function to be used for the aggregate for the dimension *DimName*.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension for which you want to set the aggregate.
<i>UserFunctionName</i>	Specify the name of the user function to be used as the aggregate function.

Returns

None.

Related Topics

- [GetDimensionAggregate method: CubeDefn class](#)

SetRule method: CubeDefn class

Syntax

```
SetRule(&RuleDefn)
```

Description

Use the SetRule method to specify a RuleDefn object to be used as the rule for this cube.

Parameters

Parameter	Description
<i>&RuleDefn</i>	Specify an already instantiated RuleDefn object that you want to associate with this cube.

Returns

None.

Related Topics

- [GetRule method: CubeDefn class](#)
- [RuleDefn Class](#)
Use the RuleDefn class to access a rule that is associated with an analytic model. You instantiate an object of this class using the GetRule method for both the CubeDefn and UserFunctionDefn classes.

UsesDimension method: CubeDefn class

Syntax

```
UsesDimension(DimName)
```

Description

Use the UsesDimension method to determine if the dimension specified by *DimName* is used by this cube.

Parameters

Parameter	Description
<i>DimName</i>	Specify the name of the dimension that you want to check for.

Returns

A Boolean value: true if the dimension is used, false otherwise.

Related Topics

- [AttachDimension method: CubeDefn class](#)
- [DetachDimension method: CubeDefn class](#)
- [GetDimensionNames method: CubeDefn class](#)

CubeDefn Class Properties

The following section discusses the CubeDefn class properties. The properties are discussed in alphabetical order.

CalcAggregates property: CubeDefn class

Description

Use this property to specify if the aggregate is calculated for this cube. This property takes a Boolean value: true if the aggregate is calculated, false otherwise.

This property is read/write.

Comments property: CubeDefn class

Description

Use this property to specify additional notes about the cube.

This property is read/write.

DimensionCount property: CubeDefn class

Description

This property indicates the number of dimensions associated with this cube.

This property is read-only.

FormatType property: CubeDefn class

Description

Use this property to specify the format of the cube. The values are:

Value	Description
AnalyticModel_Format_Number	The format is of type number.
AnalyticModel_Format_Date	The format is of type date.
AnalyticModel_Format_Member	The format is of type member.
AnalyticModel_Format_Text	The format is of type text.

This property is read/write.

IsVirtual property: CubeDefn class

Description

Use this property to specify if the cube is a virtual cube, that is, if it doesn't store data. This property takes a Boolean value: true if the cube is a virtual cube, false otherwise.

This property is read/write.

Name property: CubeDefn class

Description

This property specifies the name of the cube.

This property is read-only.

ValueDimensionName property: CubeDefn class

Description

Use this property to specify the dimension name for cubes that have a format of member.

This property is only valid when a cube has a format of member.

This property is read/write.

Related Topics

- [FormatType property: CubeDefn class](#)
- [AnalyticModelDefn Properties](#)
The following section discusses the AnalyticModelDefn class properties. The properties are discussed in alphabetical order.

CubeCollectionDefn Class

Use the CubeCollectionDefn class to access cube collections associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

- AddCubeCollection
- CopyCubeCollection
- GetCubeCollection

CubeCollectionDefn Class Methods

The following section discusses the CubeCollectionDefn class methods. The methods are discussed in alphabetical order.

AttachCube method: CubeCollectionDefn class

Syntax

AttachCube(*CubeName*)

Description

Use the AttachCube method to attach the existing cube specified by *CubeName* to the cube collection.

You should only specify cube collections comprised of derived/work records as the main record for a presentation cube collection.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube you want to attach.

Returns

None.

Related Topics

- [DetachCube method: CubeCollectionDefn class](#)
- [GetCubeNames method: CubeCollectionDefn class](#)
- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

DetachCube method: CubeCollectionDefn class

Syntax

DetachCube(*CubeName*)

Description

Use the DetachCube to detach the cube specified by *CubeName* from the cube collection.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that you want to detach.

Returns

None.

Related Topics

- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:
- [GetCubeNames method: CubeCollectionDefn class](#)
- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

GetAggregateMapping method: CubeCollectionDefn class

Syntax

```
GetAggregateMapping(PartName, IsCube)
```

Description

Use the GetAggregateMapping method to return the aggregate mapping field specified by the part *PartName*.

Parameters

Parameter	Description
<i>PartName</i>	Specify the part name for which you want the aggregate mapping field name.
<i>IsCube</i>	Specify whether the part is a cube or not. This parameter takes a Boolean value, true if the part is a cube, false otherwise.

Returns

A string.

Related Topics

- [GetFieldMapping method: CubeCollectionDefn class](#)
- [GetPersistAggregate method: CubeCollectionDefn class](#)
- [SetAggregateMapping method: CubeCollectionDefn class](#)
- [SetFieldMapping method: CubeCollectionDefn class](#)
- [SetPersistAggregate method: CubeCollectionDefn class](#)

GetCubeNames method: CubeCollectionDefn class

Syntax

```
GetCubeNames()
```

Description

Use the GetCubeNames method to return an array of strings containing all the names of the cubes associated with this cube collection.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddCube method: AnalyticModelDefn class](#)
- [CopyCube method: AnalyticModelDefn class](#)
- [DeleteCube method: AnalyticModelDefn class](#)
- [GetCube method: AnalyticModelDefn class](#)
- [RenameCube method: AnalyticModelDefn class](#)
- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:
- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetDimensionNames method: CubeCollectionDefn class

Syntax

```
GetDimensionNames()
```

Description

Use the GetDimensionNames method to return an array of string containing the names of all the dimensions associated with the cube collection.

The dimension names are returned in an array of string.

Parameters

None.

Returns

An array of string.

Related Topics

- [AttachDimension method: CubeDefn class](#)

- [DetachDimension method: CubeDefn class](#)
- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

GetDimSort method: CubeCollectionDefn class

Syntax

`GetDimSort(DimensionName)`

Description

Use the GetDimSort method return the sorting keys used for the dimension.

The sorting keys are returned as an array of any.

The first string is either true or false. If the first string is true it indicates that the dimension is sorted by the names of the members in the dimension.

The second string then is either true or false, indicating whether the sort is ascending (or descending). If the first string is false it indicates that the dimension is sorted by keys, which are the specified by the other strings in the array. The keys are names of cubes. The strings are as follows:

- Ascend1
- CubeName1
- Ascend2
- CubeName2
- Ascend3
- CubeName3

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension for which you want the sorting keys.

Returns

An array of any.

Related Topics

- [SetDimSort method: CubeCollectionDefn class](#)
- [GetDimSort method: CubeCollection class](#)
- [SetDimSort method: CubeCollection class](#)

GetFieldMapping method: CubeCollectionDefn class

Syntax

```
GetFieldMapping(PartName, IsCube)
```

Description

Use the GetFieldMapping method to return the name of the mapped field name for the part specified by *PartName*.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part for which you want the mapped field name.
<i>IsCube</i>	Specify whether this part is a cube or not. This parameter takes a Boolean value: true if the part is a cube, false otherwise.

Returns

A string.

Related Topics

- [GetAggregateMapping method: CubeCollectionDefn class](#)
- [SetFieldMapping method: CubeCollectionDefn class](#)
- [SetAggregateMapping method: CubeCollectionDefn class](#)

GetFilter method: CubeCollectionDefn class

Syntax

```
GetFilter(DimensionName)
```

Description

Use the GetFilter method to return the name of the user function used as a filter for the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension for which you want the filter name.

Returns

A string.

Related Topics

- [SetAggregateMapping method: CubeCollectionDefn class](#)
- Analytic Calculation Engine: Filter User Functions

GetPersistAggregate method: CubeCollectionDefn class

Syntax

GetPersistAggregate(*DimensionName*)

Description

Use the GetPersistAggregate method to return the value for the persist aggregate for the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension for which you want to find the persist aggregate value.

Returns

An integer, which is one of the following values:

Value	Description
AnalyticModel_AggrType_Root	The persist aggregate type is <i>Root</i> , that is, only the root node's data is saved to the database.
AnalyticModel_AggrType_All	The persist aggregate type is <i>All</i> , that is, save all of the dimension's aggregate data to the database.
AnalyticModel_AggrType_None	The persist aggregate type is <i>None</i> , that is, do not save any of the dimension's aggregate data to the database.

Related Topics

- [GetAggregateMapping method: CubeCollectionDefn class](#)
- [GetFieldMapping method: CubeCollectionDefn class](#)
- [SetAggregateMapping method: CubeCollectionDefn class](#)
- [SetFieldMapping method: CubeCollectionDefn class](#)
- [SetPersistAggregate method: CubeCollectionDefn class](#)

SetAggregateMapping method: CubeCollectionDefn class

Syntax

SetAggregateMapping(*PartName*, *IsCube*, *AggregateFieldName*)

Description

Use the SetAggregateMapping method to specify an aggregate field for the part specified by *PartName*.

You can map a field to only one data cube or dimension within one cube collection.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part for which you want to add an aggregate field.
<i>IsCube</i>	Specify whether the part is a cube. This parameter takes a Boolean value, true if the part is a cube, false otherwise.
<i>AggregateFieldName</i>	Specify the name of the field to be used to hold the aggregate value.

Returns

A string containing the name of the field that contains the aggregate value.

Related Topics

- [SetPersistAggregate method: CubeCollectionDefn class](#)
- [GetFieldMapping method: CubeCollectionDefn class](#)
- [GetPersistAggregate method: CubeCollectionDefn class](#)
- [SetFieldMapping method: CubeCollectionDefn class](#)
- [SetPersistAggregate method: CubeCollectionDefn class](#)

SetDimSort method: CubeCollectionDefn class

Syntax

```
SetDimSort(DimName, IsAscending [, CubeName1, IsAscending2, CubeName2,  
IsAscending3, CubeName3])
```

Description

Use the SetDimSort method to specify the sorting order for the dimension.

If *CubeName1* is an empty string, the dimension is sorted by the names of the members of the dimension, and the other parameters are not used.

If *CubeName1* is not an empty string, the dimension is sorted by cubes, as specified by the other parameters.

The Boolean parameter *IsAscending* defines whether sorting should be in ascending or descending order. Up to three sort keys may be specified. *CubeName1* is the primary sort key. *CubeName2* is used to sub-sort any members that have the same key value under *CubeName1*, and so on.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension that you would like to specify a sort order for.
<i>IsAscending</i>	Specify if the dimension should be sorted in ascending or descending order. This parameter takes a Boolean value: true if the sort should be ascending, false if it should be descending.
<i>CubeName1</i>	Specify whether the dimension is to be sorted by members or by cubes. If the dimension is to be sorted by members, specify a null string for this parameter. If the dimension is to be sorted by cubes, specify a cube name.
<i>IsAscending2</i>	Specify if the sort for <i>CubeName1</i> is in ascending or descending order. This parameter takes a Boolean value: true if the sort is ascending, false if its descending.
<i>CubeName2</i>	Specify the name of a cube to be used to sub-sort the primary sort specified by <i>CubeName1</i> .
<i>IsAscending3</i>	Specify if the sort for <i>CubeName2</i> is in ascending or descending order. This parameter takes a Boolean value: true if the sort is ascending, false if its descending.
<i>CubeName3</i>	Specify the name of a cube to be used to sub-sort the primary sort specified by <i>CubeName2</i> .

Returns

None.

Related Topics

- [SetPersistAggregate method: CubeCollectionDefn class](#)
- [GetDimSort method: CubeCollection class](#)

SetFieldMapping method: CubeCollectionDefn class

Syntax

```
SetFieldMapping(PartName, FieldName, IsCube)
```

Description

Use the SetFieldMapping method to specify the name of the main field used for mapping the part specified by *PartName*.

You can map a field to only one data cube or dimension within one cube collection.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part for which you want to assign a mapping field.
<i>FieldName</i>	Specify the name of the field to be used for the field mapping.
<i>IsCube</i>	Specify whether or not the part is a cube. This parameter takes a Boolean value: true if the part is a cube, false otherwise.

Returns

None.

Related Topics

- [GetAggregateMapping method: CubeCollectionDefn class](#)
- [GetFieldMapping method: CubeCollectionDefn class](#)
- [GetPersistAggregate method: CubeCollectionDefn class](#)
- [SetAggregateMapping method: CubeCollectionDefn class](#)
- [SetPersistAggregate method: CubeCollectionDefn class](#)

SetFilter method: CubeCollectionDefn class

Syntax

`SetFilter(DimensionName, UserFunctionName)`

Description

Use the SetFilter method to specify the user function to be used as a filter for the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension for which you want to set a filter.
<i>UserFunctionName</i>	Specify the name of a user function to be used as a filter for this dimension.

Returns

None.

Related Topics

- [GetFilter method: CubeCollectionDefn class](#)
- Analytic Calculation Engine: Filter User Functions

SetPersistAggregate method: CubeCollectionDefn class

Syntax

SetPersistAggregate(*DimensionName*, *AggregateType*)

Description

Use the SetPersistAggregate to specify the value for the persist aggregate for the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension for which you want to set the persist aggregate.
<i>AggregateType</i>	Specify the aggregate type. Values are:
Value	Description
AnalyticModel_AggrType_Root	The persist aggregate type is <i>Root</i> , that is, only the root node's data is saved to the database.
AnalyticModel_AggrType_All	The persist aggregate type is <i>All</i> , that is, save all of the dimension's aggregate data to the database.
AnalyticModel_AggrType_None	The persist aggregate type is <i>None</i> , that is, do not save any of the dimension's aggregate data to the database.

Returns

None.

Related Topics

- [GetAggregateMapping method: CubeCollectionDefn class](#)
- [GetFieldMapping method: CubeCollectionDefn class](#)
- [GetPersistAggregate method: CubeCollectionDefn class](#)
- [SetAggregateMapping method: CubeCollectionDefn class](#)
- [SetFieldMapping method: CubeCollectionDefn class](#)

UsesCube method: CubeCollectionDefn class

Syntax

UsesCube(*CubeName*)

Description

Use the UsesCube method to determine if the cube collection uses the cube specified by *CubeName*.

Parameters

Parameter	Description
<i>CubeName</i>	Specify the name of the cube that you want to verify.

Returns

A Boolean value, true if the specified cube is part of the cube collection, false otherwise.

Related Topics

- [AttachCube method: CubeCollectionDefn class](#)
- [DetachCube method: CubeCollectionDefn class](#)
- [GetCubeNames method: CubeCollectionDefn class](#)
- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

UsesDimension method: CubeCollectionDefn class

Syntax

UsesDimension(*DimensionName*)

Description

Use the UsesDimension method to determine if the cube collection uses the dimension specified by *DimensionName*.

Parameters

Parameter	Description
<i>DimensionName</i>	Specify the name of the dimension that you want to verify.

Returns

A Boolean value: true if the dimension is part of the cube collection, false otherwise.

Related Topics

- [CubeDefn Class](#)
Use the CubeDefn class to access a cube associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

- [DimensionDefn Class](#)
Use the DimensionDefn class to access a dimension that's associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn methods:

CubeCollectionDefn Class Properties

The following section discusses the CubeCollectionDefn class properties. The properties are discussed in alphabetical order.

AggregateRecName property: CubeCollectionDefn class

Description

Use this property to specify the name of the aggregate record associated with this cube collection. This property takes a string value.

This property is read/write.

Comments property: CubeCollectionDefn class

Description

Use this property to specify additional notes about the cube collection.

This property is read/write.

CubeCount property: CubeCollectionDefn class

Description

This property returns the number of cubes in the cube collection.

This property is read-only.

DimensionCount property: CubeCollectionDefn class

Description

This property returns the number of dimensions associated with this cube collection.

This property is read-only.

Name property: CubeCollectionDefn class

Description

This property returns the name of the cube collection as a string.

This property is read-only.

RecordName property: CubeCollectionDefn class

Description

Use this property to specify the name of the main record associated with the cube collection. This property takes a string value.

This property is read/write.

UserFunctionDefn Class

Use the UserFunctionDefn class to access the user functions that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

- AddUserFunction
- CopyUserFunction
- GetUserFunction

UserFunctionDefn Class Methods

In this section we discuss the UserFunctionDefn class methods. They are described in alphabetical order.

GetRule method: UserDefn class

Syntax

```
GetRule()
```

Description

Use the GetRule method to return a RuleDefn object that represents the rule associated with this user function.

Parameters

None.

Returns

A RuleDefn object.

Related Topics

- [RuleDefn Class](#)
Use the RuleDefn class to access a rule that is associated with an analytic model. You instantiate an object of this class using the GetRule method for both the CubeDefn and UserFunctionDefn classes.

SetRule method: UserDefn class

Syntax

`SetRule(&Rule)`

Description

Use the SetRule method to specify a rule defined by a RuleDefn object to be the rule for this user function.

Parameters

Parameter	Description
<i>&Rule</i>	Specify an already instantiated RuleDefn object that you want to use as the rule for this user function.

Returns

None.

UserFunctionDefn Class Properties

The following section discusses the UserFunctionDefn class properties. The properties are discussed in alphabetical order.

Comments property: UserFunctionDefn class

Description

Use this property to specify additional notes about the user function.

This property is read/write.

Name property: UserFunctionDefn class

Description

This property specifies the name of the user function.

This property is read-only.

OrganizerDefn Class

Use the OrganizerDefn class to access the organizers that are associated with an analytic model. You instantiate an object of this class using the following AnalyticModelDefn class methods:

- AddOrganizer
- CopyOrganizer

- [GetOrganizer](#)

OrganizerDefn Class Methods

The following section discusses the OrganizerDefn class methods. The methods are discussed in alphabetical order.

AttachPart method: OrganizerDefn class

Syntax

`AttachPart(PartName, PartType)`

Description

Use the AttachPart method to attach the part specified by *PartName* to the organizer. The part must exist in the analytic model.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part that you want to attach.
<i>PartType</i>	Specify the type of part that you want to attach. Values are:
Value	Description
AnalyticModel_Dimension	Attach a dimension.
AnalyticModel_Cube	Attach a cube.
AnalyticModel_CubeCollection	Attach a cube collection.
AnalyticModel_UserFunction	Attach a user function.

Returns

None.

Related Topics

- [DetachPart method: OrganizerDefn class](#)
- [GetPartNames method: OrganizerDefn class](#)
- [UsesPart method: OrganizerDefn class](#)

DetachPart method: OrganizerDefn class

Syntax

`DetachPart(PartName, PartType)`

Description

Use the DetachPart method to detach the part specified by *PartName* from the organizer.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part that you want to detach.
<i>PartType</i>	Specify the type of the part that you want to detach. Valid values are:
Value	Description
AnalyticModel_Dimension	Detach a dimension.
AnalyticModel_Cube	Detach a cube.
AnalyticModel_CubeCollection	Detach a cube collection.
AnalyticModel_UserFunction	Detach a user function.

Returns

None.

Related Topics

- [AttachPart method: OrganizerDefn class](#)
- [GetPartNames method: OrganizerDefn class](#)
- [UsesPart method: OrganizerDefn class](#)

GetPartNames method: OrganizerDefn class

Syntax

```
GetPartNames( )
```

Description

Use the GetPartNames method to return a list of the names of the parts used by the organizer. The names are returned as an array of string.

Parameters

None.

Returns

An array of string.

Related Topics

- [AttachPart method: OrganizerDefn class](#)
- [DetachPart method: OrganizerDefn class](#)
- [UsesPart method: OrganizerDefn class](#)

UsesPart method: OrganizerDefn class

Syntax

UsesPart(*PartName*, *PartType*)

Description

Use the UsesPart method to determine if the organizer uses the part specified by *PartName*.

Parameters

Parameter	Description
<i>PartName</i>	Specify the name of the part that you want to verify.
<i>PartType</i>	Specify the type of the part that you want to verify. Valid values are:
Value	Description
AnalyticModel_Dimension	A dimension.
AnalyticModel_Cube	A cube.
AnalyticModel_CubeCollection	A cube collection.
AnalyticModel_UserFunction	A user function.

Returns

A Boolean value: true if the part is associated with the organizer, false otherwise.

Related Topics

- [AttachPart method: OrganizerDefn class](#)
- [DetachPart method: OrganizerDefn class](#)
- [GetPartNames method: OrganizerDefn class](#)

OrganizerDefn Class Properties

The following section discusses the OrganizerDefn class properties. The properties are discussed in alphabetical order.

Comments

Description

Use this property to specify additional notes about the organizer.

This property is read/write.

Name

Description

This property specifies the name of the organizer.

This property is read-only.

RuleDefn Class

Use the RuleDefn class to access a rule that is associated with an analytic model. You instantiate an object of this class using the GetRule method for both the CubeDefn and UserFunctionDefn classes.

RuleDefn Class Methods

In this section, we discuss the RuleDefn class methods. The methods are described in alphabetical order.

AddRuleExpression method: RuleDefn class

Syntax

AddRuleExpression(*&Expr*)

Description

Use the AddRuleExpression method to add a rule expression to the rule. Use the classes in the RuleExpression subpackage to create the expression specified by *&Expr*.

After you have finished adding rule expressions to the rule, you need to use the GenerateRule method to generate the rule.

Parameters

Parameter	Description
<i>&Expr</i>	Specify the rule expression that you want added to the rule definition.

Returns

None.

Related Topics

- [GenerateRule method: RuleDefn class](#)
- [RuleExpressions Classes](#)
The RuleExpressions classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

GenerateRule method: RuleDefn class

Syntax

GenerateRule()

Description

Use the GenerateRule method to create the rule string for the rule that represents the current rule expressions that have been added using AddRuleExpression.

Parameters

None.

Returns

None.

Related Topics

- [AddRuleExpression method: RuleDefn class](#)
- [RuleExpressions Classes](#)
The RuleExpressions classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

RuleDefn Class Property

The following describes the RuleDefn class property.

RuleString property: RuleDefn class

Description

This property specifies a string representation of the rule.

After the rule is returned using the GetRule method, this string represents the existing rule cube or user function.

After AddRuleExpression and GenerateRule are called, this is the string representation of the rule.

This property is read-only.

RuleExpressions Classes

The RuleExpressions classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

The following are the RuleExpressions classes:

- Assignment

- Comparison
- Constant
- Constants
- Cube
- ExpressionBlock
- FunctionCall
- MemberReference
- Operation
- RuleExpression
- Variable

Note

The RuleExpression object is the object that the other objects are derived from. You should not create or use this object directly.

Using the Constants Class

All of the constants used with the RuleExpression classes, such as FunctionCall, comparison, operation, and so on, are actually properties of the constants class. You must always instantiate an object of the constants class to use any constants in your program.

For example, the comparison class uses a constant to test whether two operands are equal. Use the following code to create a comparison testing this:

```
&Comparison = create Comparison(&Constants.Comparison_Type_Equal);
```

All of the properties for the constants class are listed with the classes that use them.

Assignment Class

An assignment object represents an assignment statement in an analytic calculation rule.

Use the following to create an assignment object:

```
&Assignment = create Assignment();
```

Assignment Class Method

The following is the method for the assignment class.

GenerateRule method: Assignment class

Syntax

GenerateRule()

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

Related Topics

- [AddRuleExpression method: RuleDefn class](#)

- [RuleExpressions Classes](#)

The RuleExpressions classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

Assignment Class Properties

In this section we discuss the assignment class properties. The properties are described in alphabetical order.

Expression property: Assignment class

Description

Use the Expression property to specify the right-hand side of the assignment statement.

This property is read/write.

Variable property: Assignment class

Description

Use the Variable property to specify the left-hand side of the assignment statement.

This property is read/write.

Comparison Class

A comparison object represents a comparison statement in an analytic calculation rule.

Use the following to create a comparison class object:

```
&Comparison = create Comparison(&Constants.Comparison_Type);
```

Where *Comparison_Type* is one of the following:

Value	Description
Comparison_Type_Equal	Compare if the value of Operand1 equals Operand2.
Comparison_Type_Greater	Compare if the value of Operand1 is greater than the value of Operand2.
Comparison_Type_Less	Compare if the value of Operand1 is less than the value of Operand2.
Comparison_Type_GreaterEq	Compare if the value of Operand1 is greater or equal to the value of Operand2.
Comparison_Type_LessEq	Compare if the value of Operand1 is less than or equal to the value of Operand2.
Comparison_Type_NotEq	Compare if the value of Operand1 is not equal to the value of Operand2.

Specify Operand1 and Operand2 with the Operand1 and Operand2 comparison class properties.

The following code example creates a rule that compares if the first operand is greater than or equal to the second operand, then adds the rule using the AddArgument method.

```
&Comparison = create Comparison(&Constants.Comparison_Type_GreaterEq);  
&Constant = create Constant(&Constants.Constant_Type_Literal, "1000");  
&Comparison.Operand1 = &Constant;  
&Constant = create Constant(&Constants.Constant_Type_Literal, "100");  
&Comparison.Operand2 = &Constant;  
&FunCall.AddArgument(&Comparison);
```

Comparison Class Method

The following is the comparison class method.

GenerateRule method: Comparison class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

Related Topics

- [AddRuleExpression method: RuleDefn class](#)
- [RuleExpressions Classes](#)
The RuleExpressions classes represents the different parts of the analytic calculation engine rule grammar. These objects are created using the Create built-in function and the constructor for that class, then added to the RuleDefn object with the AddRuleExpression method.

Comparison Class Properties

In this section we discuss the comparison class properties. The properties are described in alphabetical order.

Operand1 property: Comparison class

Description

Use this property to specify the RuleExpression object that is the first operand to be used in the comparison.

This property is read/write.

Operand2 property: Comparison class

Description

Use this property to specify the RuleExpression object that is the second operand to be used in the comparison.

This property is read/write.

Type property: Comparison class

Description

This property returns the type of the comparison that was used to instantiate the comparison object.

The values are:

Value	Description
Comparison_Type_Equal	Compare if the value of Operand1 equals Operand2.
Comparison_Type_Greater	Compare if the value of Operand1 is greater than the value of Operand2.

Value	Description
Comparison_Type_Less	Compare if the value of Operand1 is less than the value of Operand2.
Comparison_Type_GreaterEq	Compare if the value of Operand1 is greater than or equal to the value of Operand2.
Comparison_Type_LessEq	Compare if the value of Operand1 is less than or equal to the value of Operand2.
Comparison_Type_NotEq	Compare if the value of Operand1 is not equal to the value of Operand1.

This property is read-only.

Constant Class

A constant object represents a constant statement in an analytic calculation rule.

Note

This is not the same as the constants class.

A constant object exposes all the constants that are passed to the constructors of the various RuleExpression objects.

Use the following to create a constant class object:

```
&Constant = create Constant(&Constants.Constant_Type,  
[&Constants.]Constant_Value);
```

where *Constant_Type* is one of the following:

Value	Description
Constant_Type_Builtin	The <i>Constant_Value</i> is an analytic calculation engine built-in function. In this instance, the constant value must be prefaced with an already instantiated constants object. For possible values, see below.
Constant_Type_Number	The <i>Constant_Value</i> is a number.
Constant_Type_Literal	The <i>Constant_Value</i> is a string.

When the *Constant_Type* is *Constant_Type_Builtin*, the *Constant_Value* is one of the following:

- Constant_Builtin_ALL
- Constant_Builtin_BASE_E
- Constant_Builtin_DEFAULT
- Constant_Builtin_DETAILS
- Constant_Builtin_DIRECT
- Constant_Builtin_FALSE

- Constant_Builtin_FORWARD
- Constant_Builtin_PI
- Constant_Builtin_REVERSE
- Constant_Builtin_TRUE

The following code creates a PeopleSoft Analytic Calculation Engine built-in function to be used as a constant:

```
&Constant = create Constant(&Constants.Constant_Type_Builtin,⇒  
&Constants.Constant_Builtin_REVERSE);
```

The following code creates a literal (string) constant:

```
&Constant = create Constant(&Constants.Constant_Type_Literal, "GENERAL");
```

The following code creates a number constant:

```
&Constant = create Constant(&Constants.Constant_Type_Number, "-1");
```

Constant Class Method

The following is the constant class method.

GenerateRule method: Constant class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

Constant Class Properties

In this section we discuss the constant class properties. The properties are described in alphabetical order.

Type property: Constant class

Description

This property returns the value of the *Constant Type* that was used to instantiate the constant class object.

This property is read-only.

Related Topics

- [Constant Class](#)
A constant object represents a constant statement in an analytic calculation rule.

Value property: Constant class

Description

This property returns the value of the *Constant Value* that was used to instantiate the constant class object.

This property is read-only.

Related Topics

- [Constant Class](#)
A constant object represents a constant statement in an analytic calculation rule.

Constants Class

All of the constants used with the RuleExpression classes, such as FunctionCall, comparison, operation, and so on, are actually properties of the constants class. You must always instantiate an object of the constants class to use any constants in your program.

For example, the comparison class uses a constant to test whether two operands are equal. Use the following code to create a comparison testing this:

```
&Comparison = create Comparison(&Constants.Comparison_Type_Equal);
```

All of the properties for the constants class are listed with the classes that use them.

Cube Class

A cube object represents a cube statement in an analytic calculate engine rule.

Use the following to create a cube object.

```
&Assignment = create Cube("CubeName");
```

Cube Class Methods

In the following section, we discuss the cube class methods. The methods are described in alphabetical order.

AddIndex method: Cube class

Syntax

```
AddIndex(&MemberReference)
```

Description

Use the AddIndex method to add a MemberReference object to the cube.

Parameters

Parameter	Description
<i>&MemberReference</i>	Specify an already instantiated MemberReference object to be added to the cube.

Returns

None.

Related Topics

- [MemberReference Class](#)
A MemberReference object represents a member in an analytic calculation engine rule.

GenerateRule method: Cube class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

GetIndexes method: Cube class

Syntax

```
GetIndexes()
```

Description

Use the GetIndexes method to return an array of MemberReference's (indexes) for this cube. These MemberReferences are the MemberReferences that were added with the AddIndex method.

Parameters

None.

Returns

An array of MemberReference objects.

Related Topics

- [MemberReference Class](#)
A MemberReference object represents a member in an analytic calculation engine rule.
- [AddIndex method: Cube class](#)

Cube Class Property

The following is the cube class property.

Name property: Cube class

Description

This property indicates the name of the cube that was used to instantiate the cube object.

This property is read-only.

ExpressionBlock Class

For some function, you need multi-statement nested expressions. You need to use the ExpressionBlock class to group these expressions. For example, all the statements inside of a FOR statement should be included in an expression block.

```
FOR(&Index, 1, PERIOD,  
    SET(&Value, &Value + 1);  
    SET(&countPl4, &countPl4 + 4);  
);
```

Use the following code to create an ExpressionBlock object:

```
&ExpressionBlock = create ExpressionBlock();
```

ExpressionBlock Methods

In the following section we discuss the ExpressionBlock class methods. The methods are described in alphabetical order.

AddRuleExpression method: ExpressionBlock class

Syntax

```
AddRuleExpression(&Expr)
```

Description

Use the AddRuleExpression method to add an expression to the expression block and the rule. Use the classes in the RuleExpression subpackage to create the expression specified by *&Expr*.

Note

As the rule string is generated, the system adds a ";" after each RuleExpression, except the last.

Parameters

Parameter	Description
<i>&Expr</i>	Specify the rule expression that you want added to the expression block.

Returns

None.

GetRuleExpressions method: ExpressionBlock class

Syntax

```
GetRuleExpressions()
```

Description

Use the GetRuleExpressions to return an array of rule expression objects that have been added using the AddRuleExpression method.

Parameters

None.

Returns

An array of RuleExpression objects.

FunctionCall Class

A FunctionCall object represents a function call statement in an analytic calculation engine rule.

Use the following code to create a FunctionCall object:

```
&Assignment = create FunctionCall(&Constants.Function_Call_Type,  
[&Constants.]Function_Call_Name);
```

Where *Function_Call_Type* can be one of the following:

Value	Description
FunctionCall_Type_Builtin	Specifies that the function call is a PeopleSoft Analytic Calculation Engine built-in functions. In this instance, the function name must be prefaced with an already instantiated constants object. For the built-in function values used with <i>Function_Call_Name</i> , see below.
FunctionCall_Type_UserFunc	Specifies that the function call is a user function. The value specified for <i>Function_Call_Name</i> must be an already created user function defined in this analytic model. Specify this value as a string.

When the *Function_Call_Type* is specified as *Function_Call_Type_Builtin*, the *Function_Call_Name* must be one of the following:

- FunctionCall_Builtin_ABS
- FunctionCall_Builtin_ACOS
- FunctionCall_Builtin_ARGUMENTS
- FunctionCall_Builtin_ASC
- FunctionCall_Builtin_ASIN
- FunctionCall_Builtin_AT
- FunctionCall_Builtin_ATAN
- FunctionCall_Builtin_BREAK
- FunctionCall_Builtin_CASE
- FunctionCall_Builtin_CHANGE
- FunctionCall_Builtin_CHILDCOUNT
- FunctionCall_Builtin_CHR
- FunctionCall_Builtin_CONSOL
- FunctionCall_Builtin_COS
- FunctionCall_Builtin_CUBEID
- FunctionCall_Builtin_CUBSUM
- FunctionCall_Builtin_CUMAVG
- FunctionCall_Builtin_DAVG
- FunctionCall_Builtin_DAY
- FunctionCall_Builtin_DCOUNT
- FunctionCall_Builtin_DDB
- FunctionCall_Builtin_DEC

- FunctionCall_Builtin_DLOOKUP
- FunctionCall_Builtin_DMAX
- FunctionCall_Builtin_DMIN
- FunctionCall_Builtin_DSUM
- FunctionCall_Builtin_E
- FunctionCall_Builtin_FIRST
- FunctionCall_Builtin_FOR
- FunctionCall_Builtin_FORCHILDREN
- FunctionCall_Builtin_FORMEMBERS
- FunctionCall_Builtin_FV
- FunctionCall_Builtin_GROUPAVG
- FunctionCall_Builtin_GROUPBY
- FunctionCall_Builtin_GROUPMAX
- FunctionCall_Builtin_GROUPMIN
- FunctionCall_Builtin_GROUPSUM
- FunctionCall_Builtin_GROW
- FunctionCall_Builtin_IF
- FunctionCall_Builtin_IFNPV
- FunctionCall_Builtin_INC
- FunctionCall_Builtin_INDICATE
- FunctionCall_Builtin_INPUT
- FunctionCall_Builtin_INSUBTREE
- FunctionCall_Builtin_INTERCEPT
- FunctionCall_Builtin_IRR
- FunctionCall_Builtin_ISINPUT
- FunctionCall_Builtin_LEFT
- FunctionCall_Builtin_LEN
- FunctionCall_Builtin_LN
- FunctionCall_Builtin_LOWER
- FunctionCall_Builtin_MATCH
- FunctionCall_Builtin_MAX
- FunctionCall_Builtin_MBR2TEXT
- FunctionCall_Builtin_MEDIAN
- FunctionCall_Builtin_MEMBER
- FunctionCall_Builtin_MID
- FunctionCall_Builtin_MIN
- FunctionCall_Builtin_MOD
- FunctionCall_Builtin_MONTH

- FunctionCall_Builtin_NEXT
- FunctionCall_Builtin_NPER
- FunctionCall_Builtin_NUM2TEXT
- FunctionCall_Builtin_NUMMEMBERS
- FunctionCall_Builtin_NPV
- FunctionCall_Builtin_PARAMETER
- FunctionCall_Builtin_PARENT
- FunctionCall_Builtin_PCT
- FunctionCall_Builtin_PERCENTILE
- FunctionCall_Builtin_PI
- FunctionCall_Builtin_PMT
- FunctionCall_Builtin_PREV
- FunctionCall_Builtin_PREVSELF
- FunctionCall_Builtin_PV
- FunctionCall_Builtin_QUARTILE
- FunctionCall_Builtin_RAND
- FunctionCall_Builtin_RATE
- FunctionCall_Builtin_REPLACE
- FunctionCall_Builtin_RETURN
- FunctionCall_Builtin_RIGHT
- FunctionCall_Builtin_ROUND
- FunctionCall_Builtin_SELF
- FunctionCall_Builtin_SET
- FunctionCall_Builtin_SIN
- FunctionCall_Builtin_SLN
- FunctionCall_Builtin_SLOPE
- FunctionCall_Builtin_SQRT
- FunctionCall_Builtin_STDEV
- FunctionCall_Builtin_SYD
- FunctionCall_Builtin_TAN
- FunctionCall_Builtin_TEXT2MBR
- FunctionCall_Builtin_TEXT2NUM
- FunctionCall_Builtin_THIS
- FunctionCall_Builtin_THISCUBE
- FunctionCall_Builtin_TRUNC
- FunctionCall_Builtin_UPPER
- FunctionCall_Builtin_VAR
- FunctionCall_Builtin_WHILE

- FunctionCall_Builtin_YEAR

The following code creates a function call using a PeopleSoft Analytic Calculation Engine built-in function:

```
&Funcall = create FunctionCall(&Constants.Funcall_Type_Builtin,  
&Constants.Funcall_Builtin_ABS);
```

Related Topics

- Analytic Calculation Engine: Built-in Function Reference

FunctionCall Class Methods

In this section we discuss the FunctionCall class methods. The methods are described in alphabetical order.

AddArgument method: FunctionCall class

Syntax

```
AddArgument(&RuleExpression)
```

Description

Use the AddArgument method to add an argument to this function call.

Parameters

Parameter	Description
<i>&RuleExpression</i>	Specify an already instantiated rule expression object, such as a cube object.

Returns

None.

GenerateRule method: FunctionCall class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

GetArguments method: FunctionCall class

Syntax

```
GetArguments()
```

Description

Use the GetArguments method to return an array of RuleExpression objects associated with this FunctionCall. These are the RuleExpression objects that were added using the AddArgument method.

Parameters

None.

Returns

An array of RuleExpression objects.

Related Topics

- [AddArgument method: FunctionCall class](#)

FunctionCall Class Properties

In this section we discuss the FunctionCall class properties. The properties are described in alphabetical order.

Name property: FunctionCall class

Description

This property specifies the name of the function call used to instantiate the FunctionCall object.

This property is read-only.

Type property: FunctionCall class

Description

This property specifies the type of the function call used to instantiate the FunctionCall object.

This property is read-only.

MemberReference Class

A MemberReference object represents a member in an analytic calculation engine rule.

Use the following code to create a MemberReference object:

```
&Member = create MemberReference(DimensionName, MemberName);
```

MemberReference Class Method

This section discusses the MemberReference class method.

GenerateRule method: MemberReference class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

MemberReference Class Properties

In this section we discuss MemberReference class properties. The properties are described in alphabetical order.

Dimension property: MemberReference class

Description

This property specifies the name of the dimension used to create the MemberReference object.

This property is read-only.

Member property: MemberReference class

Description

This property specifies the name of the member used to create the MemberReference object.

This property is read-only.

Operation Class

An operation object represents an operation in an analytic calculation engine rule. The operation is generally some type of mathematical function performed between two operands. Specify the operands for the operation using the `Operand1` and `Operand2` operation class properties.

Use the following code to create an operation object:

```
&Comparison = create Operation(&Constants.Operation_Type);
```

Where `Operation_Type` has a value of one of the following:

Value	Description
<code>Operation_Type_Plus</code>	The operation is addition.
<code>Operation_Type_Minus</code>	The operation is subtraction.
<code>Operation_Type_Mult</code>	The operation is multiplication.
<code>Operation_Type_Div</code>	The operation is division.
<code>Operation_Type_And</code>	Use a logical AND with the operation.
<code>Operation_Type_Or</code>	Use a logical OR with the operation.
<code>Operation_Type_Not</code>	Use a logical NOT with the operation.
<code>Operation_Type_Neg</code>	Use a mathematical negate with the operation.
<code>Operation_Type_Exp</code>	Use a mathematical exponent with the operation.

The following code creates an operations that is a multiplication between two operands.

```
&operation = create Operation(&Constants.Operation_Type_Mult);  
&Constant = create Constant(&Constants.Constant_Type_Literal, "PI");  
&operation.Operand1 = &Constant;  
&Constant = create Constant(&Constants.Constant_Type_Literal, "SLOPE");  
&operation.Operand2 = &Constant;  
&FunCall.AddArgument(&operation);
```

Operation Class Method

The following is the operation class method.

GenerateRule method: Operation class

Syntax

```
GenerateRule()
```

Description

Use the `GenerateRule` method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

Operation Class Properties

In this section we discuss the operation class properties. The properties are described in alphabetical order.

Operand1 property: Operation class

Description

Use this property to specify the RuleExpression object that is the first operand to be used in the operation.

This property is read/write.

Operand2 property: Operation class

Description

Use this property to specify the RuleExpression object that is the second operand to be used in the operation.

This property is read/write.

Type property: Operation class

Description

This property returns the type of the operation used to instantiate the operation object.

The values for this property are:

Value	Description
Operation_Type_Plus	The operation is addition.
Operation_Type_Minus	The operation is subtraction.
Operation_Type_Mult	The operation is multiplication.
Operation_Type_Div	The operation is division.
Operation_Type_And	Use a logical AND for the operation.
Operation_Type_OR	Use a logical OR for the operation.
Operation_Type_Not	Use a logical NOT for the operation.
Operation_Type_Neg	Use a mathematical negate for the operation.
Operation_Type_Exp	Use a mathematical exponent for the operation.

Variable Class

A variable object represents a variable in an analytic calculation engine rule.

Use the following code to create a variable object:

```
&Variable = create Variable(&Constants.Variable_Type, "Variable_Name");
```

Where *Variable_Type* is one of the following:

Value	Description
Variable_Type_Auto	Use a local variable.
Variable_Type_Expression	The variable is in an expression. Specify an already instantiated rule expression object for the <i>Variable_Name</i> .
Variable_Type_Dimension	The variable is a dimension name. Specify a dimension name for the <i>Variable_Name</i> .

The following code example creates a variable, then adds it to the rule.

```
&Variable = create Variable(&Constants.Variable_Type_Auto, "StartVal");  
&FunCall.AddArgument(&Variable);
```

Variable Class Method

The following is the variable class method.

GenerateRule method: Variable class

Syntax

```
GenerateRule()
```

Description

Use the GenerateRule method to return a string that contains the rule for this object.

Generally you wouldn't use this method on the individual RuleExpression objects, but instead would use the GenerateRule method on the RuleDefn object.

Parameters

None.

Returns

A string.

Variable Class Properties

In this section we discuss the variable class properties. The properties are described in alphabetical order.

Name property: Variable class

Description

This property specifies the name of the variable that was used to create the variable object, passed in the constructor.

This property is read-only.

Type property: Variable class

Description

This property specifies the type of the variable, passed in the constructor. The possible values are:

Value	Description
Variable_Type_Auto	A local variable.
Variable_Type_Expression	The variable is an expression. Specify an already instantiated rule expression object for the <i>Variable_Name</i> .
Variable_Type_Dimension	The variable is a dimension name. Specify a dimension name for the <i>Variable_Name</i> .

This property is read-only.

Analytic Model Metadata Classes Examples

The following are some examples of the most general cases of using the Analytic Model Metadata classes.

Creating an Analytic Model Code Example

The following code creates an analytic model definition “from scratch” without retrieving an existing definition from the Application Designer, adds parts such as dimensions, cubes, and cube collections, then saves the definition.

```
import PT_ANALYTICMODELDEFN:*;  
  
Function CreateGENXModel  
    Local PT_ANALYTICMODELDEFN:AnalyticModelDefn &Model;  
    Local PT_ANALYTICMODELDEFN:UserFunctionDefn &UserFunc;  
    Local PT_ANALYTICMODELDEFN:DimensionDefn &Dim;  
    Local PT_ANALYTICMODELDEFN:CubeDefn &Cube;  
    Local PT_ANALYTICMODELDEFN:CubeCollectionDefn &CubeColl;  
    Local array of string &arr;
```

```

&ACEMODELID = QE_ACE_META_WK.QE_ACE_MODELID.Value;
&Model = create PT_ANALYTICMODELDEFN:AnalyticModelDefn(&ACEMODELID);
&Model.Create();
/* Model Properties */
&Model.Description = QE_ACE_META_WK.DESCR;
&Model.LongDescription = QE_ACE_META_WK.DESCR200;
&Model.MaxDelta = QE_ACE_META_WK.QE_ACE_MAXDELTA_FL;
&Model.MaxIterations = QE_ACE_META_WK.QE_ACE_MAXITER_FLD;
If (QE_ACE_META_WK.QE_ACE_CIRCWARN_FL.Value = 0) Then
    &Circ = True;
Else
    &Circ = False;
End-If;
If (QE_ACE_META_WK.QE_ACE_RESOLVE_FLD.Value = 0) Then
    &Resolve = True;
Else
    &Resolve = False;
End-If;
&Model.ResolveCircularDeps = &Resolve;
&Model.CircularFormulaWarn = &Circ;
/* Add User Functions */
&UserFunction = &Model.AddUserFunction("FILTERPRODUCTS");
&Rule = &UserFunction.GetRule();
&Rule.RuleString = "IF( ((UNIT_COST = 0) .AND. (UNITS_SOLD = 0) .AND.
(PROD_⇒
SALES =0 )) , RETURN(0), RETURN(1))";
&UserFunction.SetRule(&Rule);
/* Add the Dimensions */
&Dim = &Model.AddDimension("MONTH");
&Dim = &Model.AddDimension("PRODUCTS");
&Dim.TotalMemberName = "TOTAL";
&Dim = &Model.AddDimension("PROD_CAT");
&Dim = &Model.AddDimension("REGION");
/* Add the cubes */
&Cube = &Model.AddCube("PROD_SALES");
&Cube.FormatType = &Cube.AnalyticModel_Format_Number;
&Cube.IsVirtual = False;
&Cube.CalcAggregates = False;
&Cube.Rule = "UNIT_COST * UNITS_SOLD";
&Cube.AttachDimension("MONTH");
&Cube.AttachDimension("PRODUCTS");
&Cube.AttachDimension("REGION");
&Cube = &Model.AddCube("SALES");
&Cube.FormatType = &Cube.AnalyticModel_Format_Number;
&Cube.IsVirtual = False;
&Cube.CalcAggregates = False;
&Cube = &Model.AddCube("TGT_COST");
&Cube.FormatType = &Cube.AnalyticModel_Format_Number;
&Cube.IsVirtual = False;
&Cube.CalcAggregates = False;
&Cube.AttachDimension("PRODUCTS");
&Cube = &Model.AddCube("UNITS_SOLD");
&Cube.FormatType = &Cube.AnalyticModel_Format_Number;
&Cube.IsVirtual = False;
&Cube.CalcAggregates = False;
&Cube.AttachDimension("MONTH");

```

```

&Cube.AttachDimension("PRODUCTS");
&Cube.AttachDimension("REGION");
&Cube = &Model.AddCube("UNIT_COST");
&Cube.FormatType = &Cube.AnalyticModel_Format_Number;
&Cube.IsVirtual = False;
&Cube.CalcAggregates = False;
&Cube.AttachDimension("MONTH");
&Cube.AttachDimension("PRODUCTS");
&Cube.AttachDimension("REGION");
/* Add Cube Collections */
&CubeColl = &Model.AddCubeCollection("REG_SALES_IN");
&CubeColl.RecordName = "QE_BAM_FACT_TBL";
&CubeColl.AttachCube("PROD_SALES");
&CubeColl.AttachCube("UNITS_SOLD");
&CubeColl.AttachCube("UNIT_COST");
&CubeColl.SetFieldMapping("MONTH", "QE_BAM_MONTH_FLD", False);
&CubeColl.SetPersistAggregate("MONTH",
&CubeColl.AnalyticModel_AggrType_None);
&CubeColl.SetDimSort("MONTH", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("PRODUCTS", "QE_BAM_PRODUCT_FLD", False);
&CubeColl.SetPersistAggregate("PRODUCTS",
&CubeColl.AnalyticModel_AggrType_⇒
None);
&CubeColl.SetDimSort("PRODUCTS", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("REGION", "QE_BAM_REGION_FLD", False);
&CubeColl.SetPersistAggregate("REGION",
&CubeColl.AnalyticModel_AggrType_None);
&CubeColl.SetDimSort("REGION", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("PROD_SALES", "QE_BAM_PRDSALES_FL", True);
&CubeColl.SetFieldMapping("UNITS_SOLD", "QE_BAM_SALES_FLD", True);
&CubeColl.SetFieldMapping("UNIT_COST", "QE_BAM_UNIT_FLD", True);
&CubeColl = &Model.AddCubeCollection("REG_SALES_PROD");
&CubeColl.RecordName = "QE_BAM_CCSMOKE";
&CubeColl.AttachCube("PROD_SALES");
&CubeColl.AttachCube("UNITS_SOLD");
&CubeColl.AttachCube("UNIT_COST");
&CubeColl.SetFieldMapping("MONTH", "QE_BAM_MONTH_FLD", False);
&CubeColl.SetPersistAggregate("MONTH",
&CubeColl.AnalyticModel_AggrType_None);
&CubeColl.SetDimSort("MONTH", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("PRODUCTS", "QE_BAM_PRODUCT_FLD", False);
&CubeColl.SetPersistAggregate("PRODUCTS",
&CubeColl.AnalyticModel_AggrType_⇒
None);
&CubeColl.SetFilter("PRODUCTS", "FILTERPRODUCTS");
&CubeColl.SetDimSort("PRODUCTS", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("REGION", "QE_BAM_REGION_FLD", False);
&CubeColl.SetPersistAggregate("REGION",
&CubeColl.AnalyticModel_AggrType_None);
&CubeColl.SetDimSort("REGION", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("PROD_SALES", "QE_BAM_PRDSALES_FL", True);
&CubeColl.SetFieldMapping("UNITS_SOLD", "QE_BAM_SALES_FLD", True);
&CubeColl.SetFieldMapping("UNIT_COST", "QE_BAM_UNIT_FLD", True);
&CubeColl = &Model.AddCubeCollection("TGT_COST_PROD");
&CubeColl.RecordName = "QE_BAM_CC_TRGT";
&CubeColl.AttachCube("TGT_COST");

```



```
&CubeColl.SetFieldMapping("PRODUCTS", "QE_BAM_PRODUCT_FLD", False);
&CubeColl.SetPersistAggregate("PRODUCTS",
&CubeColl.AnalyticModel_AggrType_⇒
None);
&CubeColl.SetDimSort("PRODUCTS", False, "", False, "", False, "");
&CubeColl.SetFieldMapping("TGT_COST", "QE_BAM_TARGET_FLD", True);
&Model.Save();
/* &Valid = &Model.Validate(); */
QE_ACE_META_WK.QE_BAM_PCSTATUS = "The Model " | &ACEMODELID | " was
created and⇒
saved.";
End-Function;
```

5

Analytic Grid Classes

Understanding the Analytic Calculation Engine Classes

PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.

More specifically, developers create *analytic models* in order to define the rules which are used to calculate data. Developers also create PeopleSoft Pure Internet Architecture pages with *analytic grids* in order to display the data within PeopleSoft applications. End users view, analyze, and make changes to this data. When end users save their changes, PeopleSoft Analytic Calculation Engine recalculates the data and saves the calculated data to the database.

PeopleCode enables developers to manipulate analytic calculation data as follows:

- Use the Analytic Calculation Engine classes to either retrieve or specify data in an instance of an analytic model loaded into the system, and also to calculate (or recalculate) cube values.
- Use the Analytic Calculation Engine metadata classes to manipulate an analytic model definition. For example, you can add cubes to a cube collection or rename an existing user function for a model.
- Use the Analytic Grid classes to manipulate the display of analytic calculation data on a page.
- Use the Analytic Type classes to manipulate an analytic type definition. For example, you can specify a new analytic model for an analytic type definition.

Important

The analytic grid classes are not supported on IBM z/OS and Linux for IBM System z platforms.

Related Topics

- [Understanding the PeopleSoft Analytic Calculation Engine Metadata Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.
- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.

Using the Analytic Grid in PeopleCode

The PeopleCode `AnalyticGrid` object is a reference to a page runtime object for the analytic grid. These particular page runtime objects aren't present until the component is started.

Note

PeopleSoft builds a page grid one row at a time. Because the `AnalyticGrid` class applies to a complete grid, you can't attach PeopleCode that uses the `AnalyticGrid` class to events that occur before the grid is built; the earliest event you can use is the page Activate Event.

If you're using the analytic grid within a secondary page, the runtime object for the grid isn't created until the secondary page is run. The grid object can't be obtained until then, which means that the earliest PeopleCode event you can use to activate a grid that's on a secondary page is the Activate event for the secondary page.

The attributes you set for displaying an analytic grid remain in effect only while the page is active. When you switch between pages in a component, you have to reapply those changes *every time* the page is displayed.

In addition, the Activate event associated with a page fires every time the page is displayed. Any PeopleCode associated with that Activate event runs, which may undo the changes you made when the page was last active. For example, if you hide a grid column in the Activate event, then display it as part of a user action, when the user tabs to another page in the component, then tabs back, the Activate event runs again, hiding the grid column again.

If a user at runtime hides a column of a grid, tabs to another page in the component, then tabs back to the first page, the page is refreshed and the grid column is displayed again.

You can use the rowset class methods and properties on analytic grid data. You can access the data loaded by the analytic grid by accessing a rowset object after the grid is populated.

Use the analytic grid classes to manipulate the display of an analytic grid—that is, one associated with PeopleSoft Analytic Calculation Engine data. If you want to manipulate a grid control, use the grid classes.

Related Topics

- [Grid Class Methods](#)
In this section, we discuss each Grid class method.
- [GetRowset method: Message class](#)
- PeopleCode Language Reference: `CreateRowset` function
- PeopleCode Language Reference: `GetRowset` function
- PeopleCode Developer's Guide: Activate Event

Using Freeze Column Mode

If you specify Freeze Column Mode for an analytic grid in Application Designer, the analytic grid isn't populated from the component buffer by default. It is your responsibility to write your application code so that it populates the rowset bound to the analytic grid.

Note

You should not be adding and deleting data from the analytic grid when you are not in Freeze Column Mode; this is an unsupported feature and might cause unexpected behavior.

In addition, no layout information is available, and there is no slicer, row, or column axis.

The following is an example of populating the analytic grid with data from a normal grid in Freeze Column Mode.

```
Local Rowset &RSAGRID;  
Local Rowset &RSGRID;  
/* Get the rowset associated with normal grid whose primary record is */  
/* QE_BAM_FACTTBL */  
&RSGRID = GetLevel0()(1).GetRowset(Scroll.QE_BAM_FACTTBL);  
/* Get the rowset associated with Analytic grid whose primary record is */  
/* QE_BAM_CCSSMOKE */  
&RSAGRID = GetLevel0()(1).GetRowset(Scroll.QE_BAM_CCSSMOKE);  
  
/* Flush out existing Data from the Analytic Grid */  
&RSAGRID.Flush();  
  
/* Copy data from Normal Grid to Analytic Grid in Freeze Column Mode*/  
&RSGRID.CopyTo(&RSAGRID, Record.QE_BAM_FACTTBL, Record.QE_BAM_CCSSMOKE);
```

Do not use the following methods with an analytic grid that is in Freeze Column Mode:

- Analytic grid GetCubeCollection method
- Analytic grid LoadData method
- Analytic grid SetAnalyticInstance method
- Analytic grid SetLayout method
- Analytic grid SlicerVisible property

Error Handling

All the analytic type classes throw PeopleCode exceptions for any fatal error that occurs in the execution of the operation. PeopleSoft recommends enclosing your analytic model programs in try-catch statements. This way, if your program catches the exception, the message set and message number that are associated with the exception object indicate the error.

Related Topics

- [Try-Catch Blocks](#)

The statements that immediately follow the try statement are called the *protected statements*. These are the only statements that are “protected” by the catch clauses in the try-catch blocks. The catch clauses in a try-catch block can be executed only if an exception is thrown by the protected statements. In addition, a catch clause is executed only when handling an exception that matches the type given on the catch. Any exceptions thrown by the catch clauses are not caught by their own try-catch block.

Data Types of the Analytic Grid Objects

Analytic grids are declared using the AnalyticGrid data type. For example,

```
Local AnalyticGrid &MyAnalyticGrid;
```

Analytic grid columns are declared using the AnalyticGridColumn data type. For example:

```
Local AnalyticGridColumn &MYGRIDCOL;
```

Scope of Analytic Grid Objects

Both the AnalyticGrid and AnalyticGridColumn objects can be instantiated from PeopleCode only.

An AnalyticGrid is a control on a page. You generally use these objects only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a Component Interface, and so on.

AnalyticGrid objects can be of scope local, component or global.

AnalyticGrid Class Reference

This reference for the AnalyticGrid class includes:

- AnalyticGrid class built-in function.
- AnalyticGrid class methods.
- AnalyticGrid class properties.

AnalyticGrid Class Built-in Function

PeopleCode Language Reference: GetAnalyticGrid function

AnalyticGrid Class Methods

In this section, we discuss the AnalyticGrid class methods. The methods are described in alphabetic order.

GetColumn method: AnalyticGrid class

Syntax

```
GetColumn(ColumnName)
```

Description

Use the GetColumn method to instantiate an AnalyticGridColumn object.

Note

The properties for an AnalyticGridColumn and a GridColumn are the same. Any differences are indicated in the description for the GridColumn property.

Specify the grid column name in the page field properties for that field, consisting of any combination of uppercase letters, digits and "#", "\$", "@", and "_".

To specify a grid column name:

1. Open the page in Application Designer, select the analytic grid and access the Analytic Grid control properties.
2. On the General tab, type the new grid name in **Page Field Name**.

Parameters

Parameter	Description
<i>ColumnName</i>	Specify the name of the column that you want to access.

Returns

An AnalyticGridColumn object.

Note

The properties for an AnalyticGridColumn and a GridColumn are the same. Any differences are indicated in the description for the GridColumn property.

Related Topics

- [GridColumn Class](#)
Grid columns are page fields that comprise a grid, which is itself a page field. Similarly, a group of GridColumn objects comprises a Grid object. The GridColumn class enables you to change grid column attributes without having to write PeopleCode that loops through every row of the grid.

GetCubeCollection method: AnalyticGrid class

Syntax

```
GetCubeCollection()
```

Description

Use the GetCubeCollection method to return a reference to the cube collection associated with the analytic grid.

Note

Do not use this method with an analytic grid that is in Freeze Column Mode.

Parameters

None.

Returns

A CubeCollection object.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.
- [CubeCollection Class](#)
Instantiate a CubeCollection object using the AnalyticModel class GetCubeCollection method.

LoadData method: AnalyticGrid class

Syntax

```
LoadData()
```

Description

Use the LoadData method to cause the system to get fresh data for the grid from the analytic calculation engine. Generally, you would use this method after you perform some operation, such as SetLayout, that might change the value or layout of the data.

Note

Do not use this method with an analytic grid that is in Freeze Column Mode.

Parameters

None.

Returns

None.

SetAnalyticInstance method: AnalyticGrid class

Syntax

```
SetAnalyticInstance(ID)
```

Description

Use the SetAnalyticInstance method to specify the analytic instance to be associated with this analytic grid.

An AnalyticGrid object can be bound only once to an analytic instance. If the SetAnalyticInstance method is called after the analytic grid is bound to an instance, the method call has no effect.

Note

Do not use this method with an analytic grid that is in Freeze Column Mode.

Parameters

Parameter	Description
<i>ID</i>	Specify the analytic instance ID as a string.

Returns

None.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.
- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.
- [AnalyticInstance Class Methods](#)
In this section, we discuss the AnalyticInstance methods. The methods are discussed in alphabetical order.

SetLayout method: AnalyticGrid class

Syntax

```
SetLayout(&SlicerArray, &RowAxisArray, &ColumnAxisArray)
```

Description

Use the SetLayout method to set the layout for the three axes, slice, row, and column.

Note

Do not use this method with an analytic grid that is in Freeze Column Mode.

If you specify No Drag drop mode for an analytic grid in Application Designer, the analytic grid has the column axis, row axis and slicer axis, but the end user isn't allowed to change the layout by dragging and dropping elements between axes. However, you can still change the layout using the SetLayout method.

Note

You can specify a null value ("") for all the required parameters for this method.

Parameters

Parameter	Description
<i>&SlicerArray</i>	Specify an already instantiated array of string containing the list of fields to be put on the slice axis.
<i>&RowAxisArray</i>	Specify an already instantiated array of string containing the list of fields to be put on the row axis.
<i>&ColumnAxisArray</i>	Specify an already instantiated array of string containing the list of fields to be put on the column axis. Note: The maximum number of columns that can be displayed in an analytic grid is four.

Returns

None.

AnalyticGrid Class Properties

In this section we discuss the AnalyticGrid properties. The properties are described in alphabetic order.

Inactive property: AnalyticGrid class

Description

Use this property to specify whether the analytic grid is inactive or active. This property takes a Boolean value, true if the grid is inactive, false otherwise.

If you specify this property as true, the analytic grid is not displayed to the user and no data is fetched from the database.

This property is read/write.

Label property: AnalyticGrid class

Description

Use this property to specify the label that appears as the title of the grid.

Note

You can't use this property to set labels longer than 100 characters. If you try to set a label of more than 100 characters, the label is truncated to 100 characters. Always put any changes to labels in the Activate event for the page. This way the label is set every time the page is accessed.

This property is read/write.

ShowGridLines property: AnalyticGrid class

Description

Use this property to specify whether grid lines are displayed with the analytic grid. This property takes a Boolean value, true to show the lines, false otherwise.

This property is read/write.

SlicerVisible property: AnalyticGrid class

Description

Use this property to specify whether the slicer is displayed with the analytic grid. This property takes a Boolean value, true to show the slicer, false otherwise.

Note

Do not use this method with an analytic grid that is in Freeze Column Mode.

This property is read/write.

SummaryText property: AnalyticGrid class

Description

Use this property to set or return a string representing the summary text for the analytic grid.

Summary text enables you to provide a brief description of the functionality and content of the grid area. This property is pertinent for users who access the application in screen reader mode.

This property is read/write.

Example

```
&MyAnGrid = GetAnalyticGrid(Page.PSMYPAGE, "PSMYPAGE");  
&MyAnGrid.SummaryText = "This is the new summary text through PeopleCode";
```

Related Topics

- [Analytic Calculation Engine: Setting Analytic Grid Label Properties](#)

6

Analytic Type Classes

Understanding the Analytic Calculation Engine Classes

PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.

More specifically, developers create *analytic models* in order to define the rules which are used to calculate data. Developers also create PeopleSoft Pure Internet Architecture pages with *analytic grids* in order to display the data within PeopleSoft applications. End users view, analyze and make changes to this data. When end users save their changes, PeopleSoft Analytic Calculation Engine recalculates the data and saves the calculated data to the database.

PeopleCode enables developers to manipulate analytic calculation data as follows:

- Use the Analytic Calculation Engine classes to either retrieve or specify data in an instance of an analytic model loaded into the system, and also to calculate (or recalculate) cube values.
- Use the Analytic Calculation Engine metadata classes to manipulate an analytic model definition. For example, you can add cubes to a cube collection or rename an existing user function for a model.
- Use the analytic grid classes to manipulate the display of analytic calculation data on a page.
- Use the analytic type metadata classes to manipulate an analytic type definition. For example, you can specify a new analytic model for an analytic type definition.

Important

The analytic type classes are not supported on IBM z/OS and Linux for IBM System z platforms.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing, and analysis.
- [AnalyticGrid Class Reference](#)
This reference for the AnalyticGrid class includes:

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

Using the Analytic Type Classes

You can create analytic type definitions using Application Designer. PeopleSoft provides the analytic type classes for accessing these definitions at runtime.

You can also create an analytic type definition in PeopleCode, using the Create method, then saving it to the database using the Save method. After you save the definition, you can access it using Application Designer.

You only need to create an instance of the analytic type. All other objects are instantiated from the analytic type object.

Once the AnalyticTypeDefn object is created, you can then execute either the Get or Create methods to “instantiate” the analytic type object.

Error Handling

All the analytic type classes throw PeopleCode exceptions for any fatal error that occurs in the execution of the operation. PeopleSoft recommends enclosing your analytic model programs in try-catch statements. This way, if your program catches the exception, the message set and message number that are associated with the exception object indicate the error.

Related Topics

- [Try-Catch Blocks](#)
The statements that immediately follow the try statement are called the *protected statements*. These are the only statements that are “protected” by the catch clauses in the try-catch blocks. The catch clauses in a try-catch block can be executed only if an exception is thrown by the protected statements. In addition, a catch clause is executed only when handling an exception that matches the type given on the catch. Any exceptions thrown by the catch clauses are not caught by their own try-catch block.

Data Types of the Analytic Type Objects

Every PeopleSoft analytic type object is declared as its own data type, that is, AnalyticTypeDefn objects are declared as type AnalyticTypeDefn, AnalyticTypeModelDefn objects are declared as type AnalyticTypeModelDefn, and so on.

The following are the data types for the PeopleSoft analytic type classes:

- AnalyticTypeDefn
- AnalyticTypeModelDefn
- AnalyticTypeRecordDefn

Scope of Analytic Type Objects

The analytic type objects can only be instantiated from PeopleCode.

These objects can be used anywhere you have PeopleCode, that is, in a Application Engine program, an application class, record field PeopleCode, and so on.

Analytic type objects can be of scope Local, Component or Global.

How to Import the Analytic Type Classes

The analytic type classes are *not* built-in classes, like Rowset, Field, Record, and so on. They are application classes. Before you can use these classes in your PeopleCode program, you must import them to your program.

An import statement names either all the classes in a package or one particular application class. For importing the analytic type classes, PeopleSoft recommends that you import all the classes in the application package.

The application package PT_ANALYTICTYPEDEFN contains the following subclasses:

- AnalyticTypeDefn
- AnalyticTypeModelDefn
- AnalyticTypeRecordDefn

The import statement you should use should be as follows:

```
import PT_ANALYTICTYPEDEFN: *;
```

Using the asterisks after the package name makes all the application classes directly contained in the named package available.

Related Topics

- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

How to Create an Analytic Type Class Object

After you've imported the analytic type classes, you need to instantiate an instance of the AnalyticTypeDefn class, using the constructor for that class and the Create function. After you create the object, you must populate it using either the Get or Create method.

The following example creates an AnalyticTypeDefn object from the QE_ACE_ALLFUNCTION analytic type definition.

```
Local PT_ANALYTICTYPEDEFN:AnalyticTypeDefn &AnalyticType;  
  
&AnalyticType = create PT_  
ANALYTICTYPEDEFN:AnalyticTypeDefn("QE_ACE_ALLFUNCTION");
```

Related Topics

- [Analytic Calculation Engine Metadata Classes Constructor](#)
You must use the constructor for the AnalyticModelDefn class to instantiate an instance of that class. All other metadata objects are instantiated from this class.

Analytic Type Classes Constructor

You must use the constructor for the `AnalyticTypeDefn` class to instantiate an instance of that class. All other objects are instantiated from this class.

AnalyticTypeDefn function

Syntax

```
AnalyticTypeDefn(TypeName)
```

Description

Use the `AnalyticTypeDefn` constructor to create an `AnalyticTypeDefn`.

Once the `AnalyticTypeDefn` object is created, you can then execute either the `Get` or `Create` methods to instantiate the model.

Note

The `Delete` and `Rename` methods can only be executed before a model is instantiated.

Parameters

Parameter	Description
<i>TypeName</i>	Specify the name of an analytic type definition.

Returns

An `AnalyticTypeDefn` object.

Example

```
&Model = create AnalyticTypeDefn("QE_ACE_ALLFUNCTION");
```

AnalyticTypeDefn Class Methods

This section describes the analytic type definition class methods. The methods are discussed in alphabetical order.

AddModel method: AnalyticTypeDefn class

Syntax

```
AddModel(ModelName, ModelType)
```

Description

Use the AddModel method to add either an analytic model or optimization model to the analytic type definition. If the model doesn't exist, this method fails.

Parameters

Parameter	Description
<i>ModelName</i>	Specify the name of an existing model.
<i>ModelType</i>	Specify the model type. Values are:
Value	Description
%ModelType_ACE	The model is an Analytic Calculation Engine.
%ModelType_OPT	The model is an optimization.

Returns

The new AnalyticTypeModelDefn object.

Related Topics

- [DeleteModel method: AnalyticTypeDefn class](#)
- [GetModelNames method: AnalyticTypeDefn class](#)
- [AnalyticTypeModelDefn Class Properties](#)
In this section we discuss the AnalyticTypeModelDefn class properties. The properties are described in alphabetic order.

AddRecord method: AnalyticTypeDefn class

Syntax

AddRecord(*RecordName*)

Description

Use the AddRecord method to add a record to the analytic type definition. If the record definition doesn't exist in Application Designer, or if the record already exists in this analytic type definition, this method fails.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the name of the record that you want to add.

Returns

An AnalyticTypeRecordDefn object that represents the record.

Related Topics

- [DeleteRecord method: AnalyticTypeDefn class](#)

- [GetRecordNames method: AnalyticTypeDefn class](#)
- [AnalyticTypeRecordDefn Class Methods](#)

In this section we describe the AnalyticTypeRecordDefn class methods. The methods are discussed in alphabetic order.

Create method: AnalyticTypeDefn class

Syntax

Create()

Description

Use the Create method to create, and instantiate, a new analytic type. If the analytic type already exists, an exception is thrown.

Parameters

None.

Returns

None.

Related Topics

- [Save method: AnalyticTypeDefn class](#)
- [Try-Catch Blocks](#)

The statements that immediately follow the try statement are called the *protected statements*.. These are the only statements that are “protected” by the catch clauses in the try-catch blocks. The catch clauses in a try-catch block can be executed only if an exception is thrown by the protected statements. In addition, a catch clause is executed only when handling an exception that matches the type given on the catch. Any exceptions thrown by the catch clauses are not caught by their own try-catch block.

CopyTo method: AnalyticTypeDefn class

Syntax

CopyTo(*NewAnalyticTypeName*)

Description

Use the CopyTo method to copy the current AnalyticTypeDefn object to the AnalyticTypeDefn object with the specified name. This method fails if the analytic type specified with *NewAnalyticTypeName* already exists.

Parameters

Parameter	Description
<i>NewAnalyticTypeName</i>	Specify the name of the new analytic type definition that you want to create.

Returns

The new AnalyticTypeDefn object.

Related Topics

- [Create method: AnalyticTypeDefn class](#)
- [Save method: AnalyticTypeDefn class](#)

Delete method: AnalyticTypeDefn class

Syntax

```
Delete()
```

Description

Use the Delete method to delete the analytic type definition. You must use this method immediately after you create the AnalyticType object, before you instantiate it, that is, before you use either the Get or Create method.

Note

This method executes immediately, and deletes the definition from Application Designer.

Parameters

None.

Returns

None.

Related Topics

- [Create method: AnalyticTypeDefn class](#)
- [Get method: AnalyticTypeDefn class](#)
- [Save method: AnalyticTypeDefn class](#)

DeleteModel method: AnalyticTypeDefn class

Syntax

```
DeleteModel(ModelName)
```

Description

Use the DeleteModel method to delete the specified model from the analytic type definition.

Note

The model is not deleted from the analytic type definition until you use the Save method.

Parameters

Parameter	Description
<i>ModelName</i>	Specify the name of a model that exists in the analytic type definition.

Returns

None.

Related Topics

- [AddModel method: AnalyticTypeDefn class](#)
- [GetModelNames method: AnalyticTypeDefn class](#)
- [AnalyticTypeModelDefn Class Properties](#)

In this section we discuss the AnalyticTypeModelDefn class properties. The properties are described in alphabetic order.

DeleteRecord method: AnalyticTypeDefn class

Syntax

DeleteRecord(*RecordName*)

Description

Use the DeleteRecord method to delete a record from the analytic type definition.

Note

The record deleted from the analytic type definition until you use the Save method.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the name of the record that you want to remove from the analytic type definition.

Returns

None.

Related Topics

- [AddRecord method: AnalyticTypeDefn class](#)

- [GetRecordNames method: AnalyticTypeDefn class](#)
- [AnalyticTypeRecordDefn Class Methods](#)

In this section we describe the AnalyticTypeRecordDefn class methods. The methods are discussed in alphabetic order.

Get method: AnalyticTypeDefn class

Syntax

`Get()`

Description

Use the Get method to instantiate an existing analytic type definition as an AnalyticTypeDefn object. If the analytic type doesn't exist, this method throws an exception.

Parameters

None.

Returns

None.

Related Topics

- [Create method: AnalyticTypeDefn class](#)
- [Save method: AnalyticTypeDefn class](#)

GetModel method: AnalyticTypeDefn class

Syntax

`GetModel(ModelName)`

Description

Use the GetModel method to return a reference to an AnalyticTypeModelDefn object.

This method fails if the model specified by *ModelName* doesn't exist.

Parameters

Parameter	Description
<i>ModelName</i>	Specify the name of the analytic type model definition that you want to access.

Returns

An AnalyticTypeModelDefn object.

Related Topics

- [AnalyticTypeModelDefn Class Properties](#)

In this section we discuss the AnalyticTypeModelDefn class properties. The properties are described in alphabetic order.

GetModelNames method: AnalyticTypeDefn class

Syntax

```
GetModelNames()
```

Description

Use the GetModelNames method to return an array of string containing all the model names in this analytic type definition.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddModel method: AnalyticTypeDefn class](#)
- [DeleteModel method: AnalyticTypeDefn class](#)
- [AnalyticTypeModelDefn Class Properties](#)

In this section we discuss the AnalyticTypeModelDefn class properties. The properties are described in alphabetic order.

GetRecord method: AnalyticTypeDefn class

Syntax

```
GetRecord(RecordName)
```

Description

Use the GetRecord method to return a reference to an AnalyticTypeRecordDefn object.

This method fails if the record specified by *RecordName* doesn't exist.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the name of the record that you want to access.

Returns

An AnalyticTypeRecordDefn object.

Related Topics

- [AnalyticTypeRecordDefn Class Methods](#)

In this section we describe the AnalyticTypeRecordDefn class methods. The methods are discussed in alphabetic order.

GetRecordNames method: AnalyticTypeDefn class

Syntax

```
GetRecordNames()
```

Description

Use the GetRecordNames method to return an array of string containing the names of all the records associated with the analytic type definition.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddRecord method: AnalyticTypeDefn class](#)
- [DeleteRecord method: AnalyticTypeDefn class](#)
- [AnalyticTypeRecordDefn Class Methods](#)

In this section we describe the AnalyticTypeRecordDefn class methods. The methods are discussed in alphabetic order.

Rename method: AnalyticTypeDefn class

Syntax

```
Rename(NewAnalyticTypeName)
```

Description

Use the Rename method to rename an existing analytic type definition to a new name. You must use this method immediately after you create the AnalyticType object, before you instantiate it, that is, before you use either the Get or Create method. The new name is not saved to the database until you use the Save method.

Parameters

Parameter	Description
<i>NewAnalyticTypeName</i>	Specify the new name for the analytic type definition.

Returns

None.

Related Topics

- [Save method: AnalyticTypeDefn class](#)

Save method: AnalyticTypeDefn class

Syntax

Save()

Description

Use the Save method to save any changes that were made to the AnalyticTypeDefn object to the database.

Parameters

None.

Returns

None.

AnalyticTypeDefn Class Properties

In this section we discuss the AnalyticTypeDefn class properties. The properties are described in alphabetic order.

AppClassPath property: AnalyticTypeDefn class

Description

Use this property to specify the full name of the application package that contains the Create, Copy and Delete methods used with this analytic type definition.

This property is read/write.

Comments property: AnalyticTypeDefn class

Description

Use this property to specify comments for the analytic type.

This property is read/write.

Description property: AnalyticTypeDefn class

Description

Use this property to specify a description for the analytic type.

This property is read/write.

Name property: AnalyticTypeDefn class

Description

This property specifies the name of the AnalyticTypeDefn.

This property is read-only.

OwnerID property: AnalyticTypeDefn class

Description

This property specifies the owner ID for this AnalyticTypeDefn.

This property is read/write.

AnalyticTypeModelDefn Class Properties

In this section we discuss the AnalyticTypeModelDefn class properties. The properties are described in alphabetic order.

Name method: AnalyticTypeModelDefn class

Description

This property specifies the name of the analytic type model.

This property is read-only.

Type method: AnalyticTypeModelDefn class

Description

This property specifies the type of the analytic type model. Values are:

Value	Description
%ModelType_ACE	The model is an Analytic Calculation Engine.
%ModelType_OPT	The model is an optimization.

This property is read-only.

AnalyticTypeRecordDefn Class Methods

In this section we describe the AnalyticTypeRecordDefn class methods. The methods are discussed in alphabetic order.

GetSelectedField method: AnalyticTypeRecordDefn class

Syntax

```
GetSelectedField()
```

Description

Use the GetSelectedField to return an array of string containing the names of the fields that are selected for this record.

Parameters

None.

Returns

An array of string.

Related Topics

- [SetSelectedField method: AnalyticTypeRecordDefn class](#)

SetSelectedField method: AnalyticTypeRecordDefn class

Syntax

```
SetSelectedFields(FieldName)
```

Description

Use the SetSelectedField method to specify the name of the field that is selected for this record.

Parameters

Parameter	Description
<i>FieldName</i>	Specify the name of the field that you want to select.

Returns

None.

Related Topics

- [GetSelectedField method: AnalyticTypeRecordDefn class](#)

UnsetSelectedField method: AnalyticTypeRecordDefn class

Syntax

```
UnsetSelectedField(FieldName)
```

Description

Use the `UnsetSelectedField` method to deselect the selected field.

This method throws an exception if the field specified by *FieldName* isn't selected.

Parameters

Parameter	Description
<i>FieldName</i>	Specify the name of the field that you want to deselect.

Returns

None.

AnalyticTypeRecordDefn Class Properties

In this section we discuss the `AnalyticTypeRecordDefn` class properties. The properties are described in alphabetic order.

All of the properties listed here can also be set for the analytic type definition using Application Designer.

Related Topics

- Analytic Calculation Engine: Understanding Analytic Model Properties

Callback property: `AnalyticTypeRecordDefn` class

Description

Use this property to specify whether this record has a callback. This property takes a Boolean value, true if the record has a callback, false otherwise.

This property is read/write.

Description property: `AnalyticTypeRecordDefn` class

Description

Use this property to specify a description for the record.

This property is read/write.

Name property: `AnalyticTypeRecordDefn` class

Description

This property specifies the name of the record.

This property is read-only.

Readable property: AnalyticTypeRecordDefn class

Description

Use this property to specify whether this record is readable. This property takes a Boolean value, true if the record is readable, false otherwise.

This record is read/write.

ReadOnce property: AnalyticTypeRecordDefn class

Description

Use this property to specify whether this record is specified as read once. This property takes a Boolean value, true if the record is only read once, false otherwise.

This property is read/write.

ScenarioManaged property: AnalyticTypeRecordDefn class

Description

Use this property to specify if the record is specified as scenario managed. This property takes a Boolean value, true if the record is scenario managed, false otherwise.

This property is read/write.

SyncOrder property: AnalyticTypeRecordDefn class

Description

This property specifies the synchronization order for the record. It returns an integer value.

This property is read/write.

Writeable property: AnalyticTypeRecordDefn class

Description

Use this property to specify if a record is specified as writeable. This property takes a Boolean value, true if the record is writeable, false otherwise.

This property is read/write.

AnalyticType Classes Example

The following is a typical example of using the AnalyticType classes.

```
import PT_ANALYTICTYPEDEFN: *;

Local PT_ANALYTICTYPEDEFN: AnalyticTypeDefn &AnalyticType;

Local PT_ANALYTICTYPEDEFN: AnalyticTypeRecordDefn &AnalyticTypeRecordDefn;
```

```
&AnalyticType = create PT_ ANALYTICTYPEDEFN:AnalyticTypeDefn("BB_TEST");  
  
&AnalyticType.Create();  
  
&AnalyticType.AddModel("QE_BAM_GENX", %ModelType_ACE);  
  
&AnalyticTypeRecordDefn = &AnalyticType.AddRecordl("QE_BAM_CCSMOKE");  
  
&AnalyticTypeRecordDefn = &AnalyticType.AddRecordl("QE_BAM_FACTTBL");  
  
&AnalyticType.Save();
```

7

Application Classes

Understanding Application Classes

You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

The application classes provide capability beyond that offered by the existing PeopleCode classes. Unlike the existing classes, a subclass can inherit all the properties and methods of the class it extends. This provides all the advantages of true object-oriented programming:

- easier to debug because all the pieces are separate
- easier to maintain because functionality is gathered into a single place
- extensible by subclass

In addition, the application classes provide more structure. Using the Application Packages, you have a clear definition of each class, as well as its listed properties and methods. This makes it easier to create a complex program that uses many functions.

Related Topics

- PeopleCode Developer's Guide: Creating Application Packages

When Would You Use Application Classes?

Use Application classes to help structure your existing PeopleCode functions. For example, prior to Application classes, most PeopleCode functions were put into FUNCLIB records. However, in larger, more complex programs, it is sometimes difficult to find (let alone maintain) a function. You could make every function a class in a package with very little reworking of your PeopleCode (as well as making the different fields in a record a package, and combining them into a single larger package.) This provides a better visual interface for grouping your functions.

In addition, use Application classes when you have to do generic processing, and just the details are different. For example, suppose one of the processes for your application is reading a file object and doing bulk insert. The process could all be contained in a single package, with the classes and subclasses providing all the details, different kinds of reading for different types of files, different inserts based on the record, and so on.

One of the main differences between a class and a function call is that the call to the class is dynamic, like a function variable, but more closely controlled. All the calls to the class (methods) must have the same signature.

For example, suppose you want to provide a more generic sort, with comparison function at the end of it. You want to use the array class Sort method, but your process has to be generic: you aren't certain if you're comparing two records or two strings. You could define a class that had as its main method a comparison, and return a -1, 0, or 1. Then write your personalized sort, extending the array class method Sort.

Another use is for business processing. Think in terms of core functionality, with vertical product solutions that extend the basic processing by providing specifics, in other words, by extending the general classes with subclasses. This could be appropriate for sales force automation or order entry.

Generally, use application classes where you can extract the common functionality.

Note

Do not extend a SOAPDoc with an application class. This is currently not supported.

Application Classes General Structure

This section discusses the general form of an application class. All application classes are contained in application packages; and all application classes are composed of executable PeopleCode statements.

The division of application classes facilitates object-oriented programming and enables a separation of the following:

- What the class provides to other classes.
- What is applicable to the entire class.
- What is applicable to the definition of a method.

The data types used in an application class (for methods parameters, return values, and so on) can be any PeopleCode types, including application classes. Likewise, application classes can be used anywhere in a PeopleCode program where a general data type can be used.

Related Topics


- PeopleCode Developer's Guide: Data Types

Class Name

Application classes have a fully qualified name that is formed hierarchically by the name of the top-level package that contains them, the package that contains that package, and so on down to the short class name, that is, the one specified when the class was created in Application Designer, using a colon for the separator between names.

The fully qualified name of the class must be unique, as this is what identifies the class. The short name of the class does not have to be unique.

For example, suppose package CRM contains the application classes Address and Customer as well as the package Utilities, which in turn contains the application classes Address and Incident:

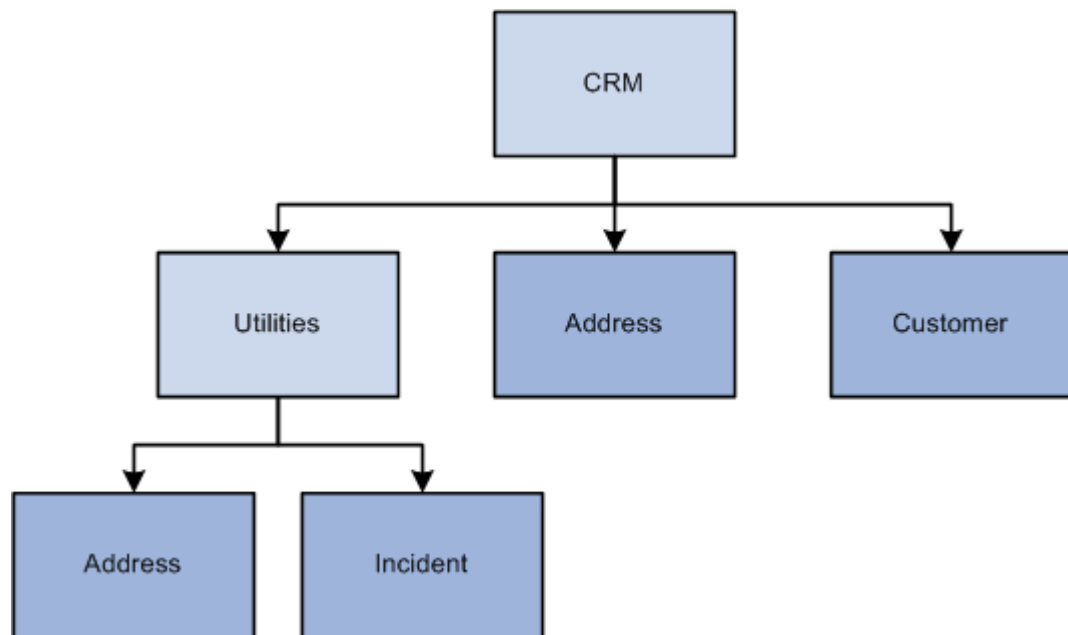

There are four distinct application classes in this example:

- CRM:Address
- CRM:Customer
- CRM:Utilities:Address
- CRM:Utilities:Incident

Note

If you change the name of a package or an application class, that name change is *not* automatically propagated through all your PeopleCode programs. You must make the change manually in your programs. If you specify an incorrect name for a package or application class, you receive a warning when you try to save the PeopleCode.

Class Extension

Extension represents the "is-a" relationship. When a class extends another class, it's called a *subclass* of that class. Conversely, the class being extended is called a *superclass* of that subclass.

A subclass inherits all of the public methods and properties (collectively called *members*) of the class it extends. These members can be overridden by declarations of methods and properties in the subclass.

Note

Application classes have no multiple inheritance (that is, being able to extend more than one class.)

Type checking in PeopleCode (both at design time and runtime) does strong type checking of application classes, tracking each application class as a separate type. A subclass can be used as the class it extends, because it implements the public interfaces of its superclass. This is called *subtyping*.

In the following example, the class Banana extends the class Fruit. Banana is the *subclass* of Fruit. From Fruit, you can extend to Bananas. However, from Bananas you can't extend to Fruit. Another way to think about this is you can only extend from the general to the specific, not the other way around.

```
class Fruit
    method DoFruit();
    property number FruitNum instance;
end-class;

class Banana extends Fruit
    method DoBanana();
    property number BananaNum instance;
end-class;
```

The following code shows a correct way to assign a class object, because Banana is a *subtype* of Fruit.

```
local Fruit &Bref = create Banana();
```

The following is *not* correct. Banana is a subtype of Fruit. Fruit is *not* a subtype of Banana. This assignment causes an error at design time.

```
local Banana &Fref = create Fruit();
```

Before you can extend a class, you must first import it. You must import all class names you use in a PeopleCode program before you use them.

Related Topics

- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

Declaration of Public External Interface

The names of the members (that is, all the methods and properties of a class) must be unique only within that class. Different classes can have members with the same name. As members are used only with objects, and each object knows its class, the member that's accessed is the one associated with that class.

For example, more than one class has the property Name which returns the name of the object executing the property. There isn't any confusion, because the field Name property returns the name of a field, while the record name property returns the name of a record. No class has more than one property called Name.

Note

Within a class, each member name *must* be unique.

The public part of a class declaration specifies the methods and properties that the class provides to other PeopleCode programs. These methods and properties are *dynamically bound*, that is, the actual method that is called depends on the actual class of the object, as it might be an overridden method or property from a subclass.

In the following code example, the text in bold indicates the public part of the class declaration.

```
/* generic building class */  
class BuildingAsset  
    method Acquire();  
    method DisasterPrep();  
end-class;
```

Access Control and the Declaration of Protected Properties and Methods

Application class objects have private and public access control. Properties or methods that are declared outside the “private” declaration section have public access control. This means that they can be referenced and used by any PeopleCode. This access is of course subject to access controls such as “readonly”. Private properties and methods are private to the class, not instance, and can only be referenced by objects of this application class.

Between these two access control schemes of public and private, lies the concept of protected methods and properties. Protected methods and properties can be accessed only by objects of this application class and those derived from this application class. Use protected methods or properties when you want to hide them from outside use, but allow the flexibility of using them in derived classes.

The declarations of protected variables and methods are done within the class declaration, before the declaration of private variables and methods. You can use protected instance variables in interface classes. Protected methods and properties can be overridden by subclasses.

Most of the time your design can be implemented through the use of private methods and properties without resorting to the use of protected methods and properties. The following examples demonstrates the rules and some of the subtleties about when to use protected methods and properties.

```
class A;  
    method A();  
    property string Q;  
protected  
    method MP() Returns string;  
    property string p;  
end-class;  
  
method A;  
    &p = "Class A: property p";  
end-method;  
  
method MP
```

```

        /+ Returns String +/
        Return "Class A: method MP";
end-method;

=====

class B extends A;
    method B();
    method M(&X As C);
    method m2(&Aobj As A);
    /* property string P; */
protected
    property string Q;
    method MP() Returns string;
end-class;

method B;
    %Super = (create A());
    &Q = "Class B: property Q";
    /* &P = "Class B: property P"; */
end-method;

method M
    /+ &X as FOXTEST:C +/;

    MessageBox(0, "", 0, 0, "In B:M %This.P=" | %This.p);
    /* %This.p is class A property P */
    MessageBox(0, "", 0, 0, "In B:M %This.Q=" | %This.Q);
    /* %This.q is class B property Q */
    MessageBox(0, "", 0, 0, %This.MP());
    /* %This.MP() calls class B method MP */

    if &X.p = "Error" then
    end-if;
    /* error: cannot reference &X.p since class B is
    not involved in the implementation of class C */
end-method;

method m2
    /+ &Aobj as FOXTEST:A +/
    /* MessageBox(0, "", 0, 0, "In B:M2 &Aobj.P=" | &Aobj.p);
    /* Error: cannot reference &Aobj.p from class B
    since class B is not involved in its implementation */

end-method;

method MP
    /+ Returns String +/
    Return "Class B: method MP";
end-method;

=====

class C extends A;
    method C();
protected

```

```

        property string P;
    end-class;

    method C;
        %Super = (create A());
        &P = "Class C: property P";
    end-method;
    =====

    /* AE program */
    import FOXTEST:*;

    Local A &A = (create A());

    Local object &obj = &A;
    MessageBox(0, "", 0, 0, "In AEMINITEST: &obj.p=" | &obj.P);
    /* run time error: anonymous access through type
    object not allowed*/

```

The following example also illustrates some of the rules surrounding protected access control.

```

import FOXTEST:Point3d;

class Point
    method Point(&X1 As integer, &Y1 As integer);
    method Warp(&A As Point3d);
protected
    property integer x;
    property integer y;
end-class;

method Point
    /* &X1 as Integer, +/
    /* &Y1 as Integer +/;
    %This.x = &X1;
    %This.y = &Y1;
end-method;

method Warp
    /* &A as FOXTEST:Point3d +/
    /* Local Integer &temp = &A.Z; ERROR cannot access &A.Z */
end-method;
=====
import FOXTEST:Point;

class Point3d extends Point
    method Point3d(&X1 As integer, &Y1 As integer, &Z1 As integer);
    method Delta(&P As Point);
    method Delta3d(&Q As Point3d);
protected
    property integer z;
end-class;

method Point3d
    /* &X1 as Integer, +/

```

```

        /+ &Y1 as Integer, +/
        /+ &Z1 as Integer +/;
        %Super = (create Point(&X1, &Y1));
        %This.z = &Z1;
    end-method;

method Delta
    /+ &P as FOXTEST:Point +/

    /* &P.x = %This.x;
    ERROR cannot access &P.x since while Point3d
    (the class in which references to fields x and y occur)
    is a subclass of Point (the class in which x and y are declared),
    it is not involved in the implementation of Point (the type of parameter p)*/

    /* &P.y = %This.y;
    ERROR cannot access &P.y. Same reason as above */
    end-method;

method Delta3d
    /+ &Q as FOXTEST:Point3d +/

    /* The protected members of Q can be accessed because the class point3d is a⇒
    subclass of Point and is involved in the implementation of Point3d */
    &Q.x = %This.x;
    &Q.y = %This.y;
    &Q.z = %This.z;
    end-method;

```

Declaration of Private Instance Variables and Methods

The private part of a class declaration gives the declaration of any private methods, instance variables, and private class constants. Private methods *cannot* be overridden by subclasses, because they are completely private to the declaring class. Likewise, the instance variables can't be overridden.

The declarations of private variables and methods are done within the class declaration.

Note

You cannot have private methods or instance variables in an interface type of class.

In the following example, there are both public as well as private methods and properties. Any method that is declared before the keyword `Private` in the initial class declaration is public. Any method declared after the keyword `Private` is private. Properties are only declared in Public. Instances and Constants are only declared in Private

In the following example, the class `Example` extends the class `ExampleBase`. It has both public as well as private methods and properties. It also defines the private method in the definition of methods section of the code (the private definitions are marked like this.)

```
import PWWPACK:ExampleBase;
```

```

class Example extends ExampleBase
    method Example();
    method NumToStr(&Num As number) Returns string;
    method AppendSlash();
    property number SlashCount get;
    property number ImportantDayOfWeek get set;
    property string SlashString readonly;
    property date ImportantDate;
private
    method NextDayOfWeek(&Dow As number) Returns date;
    Constant &Sunday = 1;
    instance string &BaseString;
end-class;

Global string &CurrentBaseString;

/* Method definitions */
method NumToStr
    return String(&num);
end-method;

method AppendSlash
    &SlashString = &SlashString | "/";
end-method;

get SlashCount
    Return Len(&SlashString) - Len(&BaseString);
end-get;

get ImportantDayOfWeek
    Return Weekday(&ImportantDate);
end-get;

set ImportantDayOfWeek
    &importantdate = %This.nextdayofweek(&newvalue);
end-set;

/* Private method. */
method nextdayofweek
    Return &ImportantDate + (&dow - Weekday(&ImportantDate));
end-method;

/* Constructor. */
method Example
    &BaseString = &CurrentBaseString;
    &SlashString = &BaseString;
    &ImportantDate = Date(19970322);
end-method;

```

Definition of Methods

After the declaration of any global or component variables and external functions needed by the methods, comes the actual definition of the methods. This section discusses some of the differences in how application programs are processed by the system, and how application class method parameters are processed.

- The system *never* skips to the next top-level statement.
- Application programs generally pass parameters by value, which is not the same as for existing functions.
- Parameter passing with object data types is by reference.
- Application programs use the `out` specifier to pass a parameter by reference.

Not Skipping to The Next Top-Level Statement

For existing functions and programs, the system skips to the next top-level statement in some circumstances, such as a field not found error. This never happens in an application class program. The code is always executed or an error is produced.

Passing Parameters in Application Class Methods

The parameters to a method are passed by value in the absence of an *out* specification in the parameter list. However, if a parameter list has an *out* specification, that argument (when used in the call of a method) must be a value that can be assigned something, and is passed by *reference*. In particular this means you cannot pass an object property to a method which requires the parameter to be an "out" parameter. Application class properties are always passed by value.

For example:

```
/* argument passed by reference */
method increment(&value as number out);
/* argument passed by value */
method increment(&value as number);
```

This is in contrast with existing PeopleCode functions that pass *all* parameters by reference when they can be assigned something. This means the method signature is a specification of which parameters can be updated by the method. This makes the code easier to debug and maintain because it's easy to see what can be updated and what can't.

The following is an example of code that increments a variable by one.

```
local Number &Mine;
```

```
&Mine = 1;
```

```
&obj.Increment(&Mine);
```

&Mine now has the value 2.

You cannot pass properties by reference. For example, suppose `MyProp` is a property of class `Xan`, a statement that requires a reference doesn't work if you supply the property. The following code will always fail because `&Xan.MyProp` is always passed by value and the `MySqlExec` method requires it to be passed by reference (so a value can be returned.)

```
MySqlExec("select from bar", &Xan.MyProp)
```

This makes sense because the semantics of an object require that you can only change a property with standard property references, not as a side affect of some other action.

Passing Parameters with Object Data Types

Parameters with object data types are always passed by reference:

```
/* argument passed by reference */  
method storeInfo(&f as File);
```

If you specify the out modifier for a method parameter with an object data type, it becomes a *reference parameter*. This means that the parameter variable is passed by reference instead of the object that it is pointing at when passed.

For example, if you pass an object parameter with the out modifier:

```
method myMethod(&arg as MyObjectClass);  
  
local MyObjectClass &o1 = create MyObjectClass("A");  
local MyOtherObjectClass &o2 = create MyOtherObjectClass();  
  
&o2.myMethod(&o1);
```

And inside myMethod this occurs:

```
Method myMethod  
    &arg = create MyObjectClass("B");  
end-method;
```

Since the method argument is reassigned within the body of myMethod, &o1 does not point at the new instance of MyObjectClass (initialized with "B") after the method call completes. This is because &o1 still references the original instance of MyObjectClass.

However, if &o1 had been passed with the out modifier, after the method call completes, &o1 points at whatever the parameter was last assigned to; in this case, the new instance of MyObjectClass. The parameter, rather than the object, is passed by reference.

Using the Out Specification for a Parameter

In the following example, a class, AddStuff, has a single public method, DoAdd. This adds two numbers together, then assigns them as different numbers. In the signature of the method declaration, the first parameter is *not* declared with an out statement, while the second one is.

```
class AddStuff  
    method DoAdd(&P1 as number, &P2 as number out);  
end-class;  
  
method DoAdd  
    &X = &P1 + &P2;  
    &P1 = 1;  
    &P2 = 2;  
end-method;
```

In the following PeopleCode example, an object named `&Aref` is instantiated from the class `AddStuff`. Two parameters, `&I` and `&J` are also defined.

```
local AddStuff &Aref = create AddStuff();  
local number &I = 10;  
local number &J = 20;
```

The following code example is correct. `&J` is changed, because of the *out* statement in the method signature, and because the value is being passed by reference. The value of `&I` is *not* updated.

```
&Aref.DoAdd(&I, &J); /* changes &J but not &I */
```

The following code example causes a design time error. The second parameter must be passed *by reference*, not by value.

```
&Aref.DoAdd(10, 20); /* error - second argument not variable */
```

Related Topics

- PeopleCode Developer's Guide: PeopleCode Language Structure

Declaration of Abstract Methods and Properties

You can declare methods and properties as abstract, that is, a method or property that has a signature which specifies the parameters and results, but has no implementation in the class that defines it. The implementation may occur in one of the classes that extend the class where the method or property is initially defined.

Abstract methods and properties could be used, for example, when your application wants to provide a means for in-field customization. Your application might deliver a base class specifying the abstract methods and properties and you would allow the customization to complete those methods and properties by using a class that would extend the base class and provide implementations for some or all of the abstract methods and properties.

For a class that only contains abstract methods and properties, that is, a pure interface class, you would define a PeopleCode interface, instead of a class. You define a PeopleCode interface by using the keyword `Interface` instead of `Class`. In an interface, all the methods and properties are abstract by default.

The following example illustrates the use of abstract methods and properties. Class `MyInterface` is the base class which has mostly abstract methods and properties. However it is fully specified by the class `MyImplementation` which provides an implementation for all the methods and properties.

```
class MyInterface  
    method MyMethod1() abstract;  
    method MyMethod2() Returns string abstract;  
    method MyMethod3();  
    property string myproperty1 abstract readonly;  
    property number myproperty2 abstract;  
    property number myproperty3 abstract;  
end-class;  
  
method MyMethod3
```



```

end-method;
-----
import FOXTEST:MyInterface;

class MyImplementation extends MyInterface;
    method MyImplementation();
    method MyMethod1();
    method MyMethod2() Returns string;
    property string myproperty1 readonly;
    property number myproperty2;
    property number myproperty3;
end-class;

method MyImplementation
    %Super = create MyInterface();
end-method;

method MyMethod1
    /* dummy */
end-method;

method MyMethod2
    /* Returns String */
    Return "MyMethod2's implementation is this";
end-method;

```

Considerations Using Abstract Methods and Properties

Be aware of the following considerations when using abstract methods or properties.

- You cannot have private abstract methods.
- You will receive an error if you try to provide a method body for an abstract method.
- The method signatures must be identical between the abstract method definition and the method implementation in the derived subclass.
- You will receive an error if you try to provide a Get or Set body with an abstract property.
- You will receive an error and your PeopleCode program will be terminated if you try to call an abstract method or property at runtime, unless caught in a try-catch block.
- The class that implements an interface must still assign %Super in its constructor.

Interfaces

The concept of an interface class is purely a syntactic assist when you are defining an application class which is totally composed of abstract methods and properties. In this case by simply specify the keyword interface you are indicating that all the methods and properties are abstract. The following two definitions are semantically equivalent.

```

class MyInterface
    method MyMethod1() abstract;
    method MyMethod2() Returns string abstract;
    property string myproperty1 abstract readonly;
    property number myproperty2 abstract;
    property number myproperty3 abstract;
end-class;

```

```
interface MyInterface
    method MyMethod1();
    method MyMethod2() Returns string;
    property string myproperty1 readonly;
    property number myproperty2;
    property number myproperty3;
end-interface;
```

When you provide an implementation for an interface you can also use the keyword `implements` instead of `extends`. While this is not mandatory, specifying `implements` describes more accurately what your application class is doing.

If your class implements an interface, you don't need to create an object reference to the superclass since the system does that automatically for you.

In addition if your constructor takes no parameters and simply exists to create an object reference to the superclass (that is, there is only one statement such as `%Super = create mySuper( );`), then you don't need to define a constructor method at all.

Constructors

The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.

This constructor is *always* executed when an object of the class is instantiated.

Note

Before a constructor runs, the instance variables for the class are set by default based on their declared types.

Instantiate new objects of an application class by using the `create` function. This function takes the name of the class, and any parameters needed for the constructor method.

If the short class name is unambiguous, that is, only one class by that short name has been imported, you can use just the short class name.

The following code instantiates an object of the class `Fruit`:

```
&Fref = create Fruit();
```

If there's a possibility that the name is ambiguous, you can use the full class name to instantiate the object.

The following code instantiates an object of the `Invoice` class:

```
&InvObj = create PT:examples:Invoice();
```

If the create function is used in the context of further object expressions, that is, with a reference to members by a dot operation, the function call must be enclosed in parentheses. This is to emphasize that the creation happens before the member reference. For example:

```
&InvCust = (create Invoice()).Cust();
```

If necessary, the constructor is supplied its parameters by the call-list after the class name in the create statement. For example:

```
&Example = create Example(&ConstructorParameter1, 2, "Third");
```

A class that does not extend some other class does not need any constructor.

A class that extends another class must have a constructor, and in the constructor, it must initialize its super class. This restriction is relaxed if the super class constructor takes no parameters, and all the constructor does is assign it to %Super. In this case, the runtime creates the super object and runs its constructor automatically. The benefit of this is two-fold: at design time you do not need to provide a constructor since the runtime automatically does the equivalent of %Super = create MySuperObject(); Also, at runtime, you may notice a performance increase since the super class object creation and construction are done without any PeopleCode. This latter benefit can be compounded in the case where there are multiple levels of inheritance.

To the general case, to initialize a superobject, an instance of the superclass is assigned to the keyword %Super in the constructor for the subclass. This assignment is allowed only in the constructor for the subclass.

The following example shows this type of assignment:

```
class Example extends ExampleBase
    method Example();
    ...
end-class;

Global string &CurrentBaseString;

method Example
    %Super = create ExampleBase();
    &BaseString = &CurrentBaseString;
    &SlashString = &BaseString;
    &ImportantDate = Date(19970322);
end-method
```

If your subclass' constructor only exists to create the superclass object and assign that to your %Super, you can dispense with providing a constructor completely as the following example illustrates.

```
class A
    ...
end-class;

Class B extends A
    ...
end-class;
```

```
Class C extends B
...
end-class;

...
Local C &c = create C();

...
```

Classes A, B and C have no constructors and the one call to create C creates objects of class C, B and A and run their constructors. PeopleSoft recommends that unless your constructors take parameters and need to do more than be assigned to their %Super, that you do not provide constructors since that simplifies design time as well as may improve runtime performance significantly.

The above example is semantically equivalent to the following, except that it may run much faster, since it does not have to run PeopleCode at each step of the construction process.

```
class A
...
end-class;

Class B extends A
    Method B();
...
end-class;

method B
    %Super = create A();
end-method;

Class C extends B
    Method C();
...
end-class;

method C
    %Super = create B();
end-method;
```

Note

Application classes don't have destructors, that is, a method called just before an object is destroyed. The PeopleCode runtime environment generally cleans up any held resources, so they're not as necessary as they are in other languages.

Related Topics

- PeopleCode Language Reference: create function
- [Superclass Reference](#)
A method can refer to a member of its superclass by using the %Super system variable. This construction is needed only to access superclass members that are hidden by overriding members in the current class.

- PeopleCode Language Reference: %Super system variable

External Function Declarations

External function declarations are allowed in application classes, in the global and component variable declarations, after the class declaration (after the end-class statement), and before the method definitions. For example:

```
import SP:Record;

class Person extends SP:Record
    method Person(&pid As string);
    method getPerson() Returns Record;
    method getUsername() Returns string;
private
    instance Record &recPerson;
end-class;

Declare Function getUsername PeopleCode FUNCLIB_PP.STRING_FUNCTIONS
FieldFormula;

method Person
    /* &pid as String */
    %Super = create SP:Record(Record.SPB_PERSON_TBL);
    &recPerson = %Super.getRecord();
    &recPerson.PERSON_ID.Value = &pid;
end-method;

method getPerson
    /* Returns Record */
    Return &recPerson;
end-method;

method getUsername
    /* Returns String */
    Local string &formattedName;
    &formattedName = getUsername(&recPerson.PERSON_ID);
    Return &formattedName;
end-method;
```

When application class properties and instance variables are used as the argument to functions or methods, they are always passed by value, never by reference. This means that the called function or method cannot change the value of the property or instance variable. If you want a function call to change a property or instance variable, use a local variable in the call and then assign the property or instance variable after the call.

Suppose you have the following class and you want to call Meth2 in the body of Meth1, passing it MyProp:

```
class MyClass
    property number MyProp;
    method Meth1();
    method Meth2(&i as number out);
end-class;
```

The following PeopleCode *fails* with a compile-time error:

```
method Meth1
    Meth2(%This.MyProp); /* error - field or temp name required. */
    Meth2(&MyProp); /* error - field or temp name required. */
end-method;
```

The following PeopleCode is valid:

```
method Meth1
/* Assignment needed if &i is input as well as output in Meth2. */
    local number &Var = %This.MyProp;
    Meth2(&Var);
    %This.MyProp = &Var;
end-method;
```

Note

You call a Java program from an Application Class the same way you do using any other PeopleCode program, that is, by using one of the existing Java class built-in functions.

See [From Java to PeopleCode](#).

Naming Standards

This section describes the naming standards these components of application classes: packages, classes, methods, and properties.

Naming Packages

The naming standard for application packages is in the following format.

CC_XXX[_YYY]

Where CC is the company name (for example, PS is PeopleSoft), XXX is the product line, and YYY is the product code.

Examples are PS_CRM and PS_CRM_RB.

Naming Classes

Use a constructor to be the same name as the short name for the class. PeopleSoft recommends that you do not name classes to be GetXxx.

Naming Methods

Make method names simple verb or verb object words, spelled out, first letter of each word capitalized. Examples: GetField, Save, SetDefault, WriteRecord

Naming Properties

Make property names nouns, likewise spelled out, first letter of each word capitalized. Examples: Dimension, HTTPMethod, PathInfo, SubscriptionProcessId.

For Boolean read-only properties, sometimes IsXxx is appropriate. Examples: IsOpen, IsNewFieldID, IsChanged, IsDeleted

State Boolean properties positively, that is, IsChanged, as opposed to negatively, IsUnChanged. This avoids double negatives when testing (If Not &MyField.IsUnChanged Then. . .)

Import Declarations

Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

An import statement names either all the classes in a package or one particular application class.

If you're importing all the classes in a package, the syntax for the import statement ends with the following:

```
:*
```

This makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are *not* made available.

If you're importing one particular application class, the syntax of the import statement ends with the short name of the class. Only that class is made available.

For example, the following imports all the classes of the package named Fruit:

```
Import Fruit:*
```

The following imports only the application classes Banana and Kiwi. If the package named Fruit contains other classes, those are not made available to the PeopleCode program:

```
Import Fruit:Banana;
```

```
Import Fruit:Kiwi;
```

If you had a subpackage in Fruit named Drinks, you could access all the classes in that subpackage like this:

```
Import Fruit:Drinks:*
```

A PeopleCode program (either a separate program or one contained within a class definition) can use only application class names that have been imported. However, a class definition can use its own name without having to import it.

It's possible to import two packages which contain application classes with the same short name. For example, suppose my package Fruit contained classes Apple and Banana. Suppose a second package, Drinks, contained Apple and Cherry.

```
Import Fruit:*;
```

```
Import Drinks:*;
```

You could refer to the Banana and Cherry classes using just the short name of the class. However, you couldn't refer to the Apple class by the short name. You must always use the full name reference (that is, the name of the package and the name of the class) when referring to Apple.

```
Global Banana &MyBanana;
```

```
Local Cherry &CherryTree;
```

```
Component Fruit:Apple &GreenApple;
```

The following line produces an error, because the program doesn't know which Apple class you're referring to:

```
Component Apple &GreenApple;
```

Note

Single class imports (such as, `Import Fruit:Banana`) are checked for existence when you save your PeopleCode.

Self-Reference

A method can refer to the current object using the `%This` system variable.

Due to subtyping, `%This` is an object of either the method's class or a subclass of the method's class.

In PeopleCode, the methods and properties of the class *cannot* be used without an object qualification.

In the following code example, the line in bold indicates an error. You can't call the class this way: you must use `%This`.

```
class FactorialClass
  method factorial(&I as number) returns number;
end-class;

method factorial
  if &I <= 1 then
    return 1;
```



```

end-if;

return &I * factorial(&I - 1); /* error - factorial undefined */

return &I * %This.factorial(&I - 1); /* okay */
end-method;

```

One of the implications of this is that when you're writing a method, there isn't any way to guarantee you'll access your own class' version of a public method (rather than a subclass') as it might be overridden by a subclass. The only way to make sure that you can access your own method is to make it private.

If you have some action that you also want to make public, and you want guaranteed access to it, you can make the action a private method, then define a public method for it that calls the private one.

In the following example, `factorial` is the public method that can be used by other classes. `myFactorial` is the private action.

```

class FactorialClass
    method factorial(&I as number) returns number;
private
    method myFactorial(&I as number) returns number;
end-class;

method factorial
    return myFactorial(&I);
end-method;

method myFactorial
    if &I <= 1 then
        return 1;
    end-if;
    return &I * %This.myFactorial(&I - 1);
end-method;

```

If you declare an instance variable as private you can still access it as a private property in another instance of the same class. For example, given the following declaration:

```

class Example

    private

        instance number &Num;

end-class;

```

A method of `Example` could reference another `Example` instance's `&Num` instance variable as follows:

```

&X = &SomeOtherExample.Num;

```

Related Topics

- PeopleCode Language Reference: %This system variable

Using %This with Constructors

%This when used in application class constructor code refers to the object currently being constructed. It does not refer to the dynamic this pointer of some object under construction. Given these two application classes, the PeopleCode %This.Test() in the Base constructor *always* refers to the Test method in the Base class.

```
class Base
    method Base();
    method Test();
    method CallTest();
    property string sTestResult;
end-class;

method Base
    %This.Test();
end-method;

method Test
    &sTestResult = "BASE_METHOD_CALLED";
end-method;

method CallTest
    %This.Test();
end-method;

import PACKAGE:Base;

class Extend extends PACKAGE:Base;
    method Extend();
    method Test();
end-class;

method Extend
    %Super = create PACKAGE:Base();
end-method;

method Test
    /* Extends/implements PACKAGE:Base.Test */
    %This.sTestResult = "EXTENSION_METHOD_CALLED";
end-method;
```

Even though the Extend class method provides its own Test method which overrides Base's Test method, in PeopleCode create Extend() which ultimately runs Base's constructor, the %This.Test() call in Base's constructor still references Base's Test method, not Extend's Test method, because %This always refers to the object under construction

Properties and Constants

This section discusses the various ways to use properties and constants with application classes.

Differentiating Between Properties and Methods

A method is a procedure or routine, associated with one or more classes, that acts on an object.

A property is an attribute of an object.

PeopleSoft recommends that you use read/write or read-only properties instead of creating methods named GetXxx and SetXxx. For example, instead of creating a method GetName, that takes no parameter, just to return the name of an object, create a read-only property Name.

If your properties simply set or return the value of an instance variable, it is far more efficient to declare the property that way than have a get and set method. The overhead of having a get and set method means that each time the property is reference some PeopleCode has to be run.

Application classes can have read-only properties, but no indexed properties.

Considerations Creating Public Properties

There are two implementations of (public) properties:

- as instance variables.
- as get-set methods.

From outside the class, you cannot tell the difference between them (for example, both are dynamically bound). However, if you just want to expose an instance variable to users of the class, you can declare a property of that name and type, which declares the instance variable too:

```
class xxx
    property string StringProp;
end-class
```

If you want the property to be read-only outside the class, use the following code:

```
class xxx
    property string StringProp readonly;
end-class
```

Both of these code examples declare an instance variable called &StringProp and provide its value for getting and change its value for setting (if not readonly). You can think of this as shorthand for the usual implementation of get-set methods.

If you want to implement the same with code (perhaps deriving the property from other instance variables or other data), use the following sort of PeopleCode program:

```
class xxx
    property string StringProp get set;
```

```
private
    instance string &inst_str;
end-class;

get StringProp
    /* Returns String */
    Return &inst_str; /* Get the value from somewhere. */
end-get;

set StringProp
    /* &NewValue as String */
    /* Do something with &NewValue. */
    &inst_str = &NewValue;
end-set;
```

To specify a read-only property, omit the set portions of the code example.

Overriding Properties

A property of a superclass can be overridden by a subclass by providing a different implementation.

The properties of a class are implemented by the keywords `Get` and `Set`, or by access to an otherwise private instance variable.

To access the property, you do not have to specify `Get` or `Set`: the context tells the processor which task you're doing. To create read-only properties, specify only a `Get` method, with no `Set` method, or for instance variable properties, specify `Readonly`.

For an instance variable property, there are two different ways for method code in the class itself to refer to the property:

- `%This.PropertyName`
- `&PropertyName`

The first way is dynamically bound, as it uses whatever (possibly overridden by a subclass) implementation of *PropertyName* that the current object provides.

The second way always accesses the private instance variable of the class that the method is declared in.

The following example returns strings, by converting the property. It also demonstrates overriding.

```
class A
    property number Anum;
    property string Astring get;
    property string Astring2 get;
end-class;

/* The following is a dynamic reference to the Anum property of the current⇒
   object, which might be a subclass of A, so this might not access the A⇒
   class's implementation of Anum as an instance variable. */
Get Astring
    return String(%This.Anum);
end-get;
```

```

/* The following is a static reference to our &Anum instance variable. Since
it⇒
does not use %This, it will not be overridden even if the current object is
a⇒
subclass of A. */
Get Astring2
    return String(&Anum);
end-get;

/* The following overrides the Anum property of our superclass,
in this case by providing another instance variable implementation.
This gives us our own &Anum instance variable. */
class B extends A
    property number Anum;
end-class;

. . .
/* Set the Anum property in B. Because of the above definitions, this sets
the &Anum instance variable in the B object, but not the &Anum instance
variable in its superobject. In the absence of other setting, the latter will
be defaulted to 0. */

local B &B = Create B();
&B.Anum = 2;

&MyValue = &B.Astring; /* &MyValue is "2" */
&MyValue = &B.Astring2; /* &MyValue is now "0" */

```

Using Get and Set with Properties

PeopleSoft recommends against defining properties that are public and mutable in application classes (similar to public instance variables) because this allows external code to read and change the internal state of the object without any controls. Instead, modify the property declarations with the Get and Set keywords.

There is a slight performance advantage, and you write less code, if you use the Get and Set keywords over using get and set methods.

If you define a property with the Get and Set keywords, you also must define a get or set block in the same part of the code that contains the method bodies.

Using Read-Only Properties

PeopleCode read-only properties are functionally similar to static variables, as long as the class that defines the properties initializes them and does not change them. The difference is that you need an instance of the class to access them.

For example, consider a Category object that has a CategoryType member that can have one of the following values:

- 'R' for Regular
- 'B' for Browse
- 'N' for News

You can define three read-only properties corresponding to each of these values, REGULAR, BROWSE, and NEWS, then initialize them to the appropriate values in the constructor of the class.

When you write code to evaluate the CategoryType of the Category object, perform a test like this:

```
If (&category.getCategoryType() = &constants.NEWS) then...
```

PeopleSoft recommends referring to the read-only properties, rather than their literal values, for the following reasons:

- If you spell a literal value incorrectly, the PeopleCode editor does not catch it; if you spell a read-only property wrong, it does.
- If you ever need to change the value of a read-only property, you only have to do it in one place.
- It makes the code more maintainable and reusable (because NEWS is more intelligible than 'N').

Using Methods and Properties for Collections

Application classes can contain collections. Collections of objects generally have at least the following methods and properties.

- First()
- Item(*Index*)
- Next()
- Count (as a property)

All numeric indexes in PeopleCode are one-origin, that is, start all indexes at 1, not 0.

Declaring Constants

PeopleSoft recommends that if constants are inextricably linked to a class, you should define them within that class. If the constants are more general, potentially used by multiple classes, consolidate the constants into a constants class at application-level or package-level.

Message catalog set and message numbers are good candidates to centralize into a single constants class. It can improve the readability of code and make it easier to maintain these values.

For example, you can define a constant MSG_SET_NBR, and then define constant values for each message that explain a little about what the message represents (like REQUIRED_VALUE_MISSING, UNIMPLEMENTED_METHOD, or INSUFFICIENT_PRIVILEGES).

Using Variables in Application Classes

This section discusses how to use variables in application classes.

Placement of Variable Declarations

Variables are declared after the class definition (the end-class statement) before anything else. After you have declared a variable, you can use it anywhere in your program.

```
class Example
  method Example_M1(&par As string);
end-class;

Global boolean &b;

method Example_M1
  /+ &par as String +/
  &b = False;
end-method;
```

Declaring Private Instance Variables

A private instance variable is private to the class, not just to the object instance. For example, consider a linked-list class where one instance needs to update the pointer in another instance. Another example is the following class declaration:

```
class Example private instance number &Num; end-class;
```

A method of Example could reference another instance of the Example &Num instance variable as:

```
&X = &SomeOtherExample.Num;
```

Avoid making every instance-scoped variable a public property. You should consider each variable individually and decide if it belongs in the public interface or not. If it does, decide if the variable warrants get or set modifiers and therefore should be a public property. If the variable only serves internal purposes to the class, it should be declared as a private instance variable.

Global Variables

PeopleSoft recommends avoiding global variables in application classes unless there is a situation where no other code works. Generally, an application class should not know about anything scoped outside of its instance. There are exceptions, since not all application classes should be standalone. For example, an application class that interacts with the Component Buffer must know about the Component Buffer objects.

Overriding Variables and Properties

PeopleSoft recommends against overriding of variables and of properties.

Since instance variables are private in scope, you cannot access them in subclasses, but you can redeclare them in subclasses. The same is true of public properties; you can even explicitly access the overridden or overriding property. However, overriding is not recommended.

Superclass Reference

A method can refer to a member of its superclass by using the %Super system variable. This construction is needed only to access superclass members that are hidden by overriding members in the current class.

In the following example, the classes that extend the general BuildingAsset class each have their own method DisasterPrep, that does the specific processing, then calls the superclass (generic) version of DisasterPrep.

```
/* generic building class */
class BuildingAsset
    method Acquire();
    method DisasterPrep();
end-class;

method Acquire
    %This.DisasterPrep();
end-method;method DisasterPrep
    PrepareForFire();
end-method;

/* building in Vancouver */
class VancouverBuilding extends BuildingAssetmethod DisasterPrep();
end-class;

method DisasterPrep
    PrepareForEarthquake();%Super.DisasterPrep(); /* call superclass method */
end-method;

/* building in Edmonton */
class EdmontonBuilding extends BuildingAssetmethod DisasterPrep();
end-class;

method DisasterPrep
    PrepareForFreezing();%Super.DisasterPrep(); /* call superclass method */
end-method;

local BuildingAsset &Building = Create VancouverBuilding();

&Building.Acquire(); /* calls PrepareForEarthquake then PrepareForFire */

&Building = Create EdmontonBuilding();

&Building.Acquire(); /* calls PrepareForFreezing then PrepareForFire */
```

Related Topics

- PeopleCode Language Reference: %Super system variable

Downcasting

Downcasting is the process of determining if an object is of a particular subclass type. If the object has that subtype (either the object is of that subtype, or is a subtype of it), a reference to

the subobject is returned, otherwise Null is returned. In either case, the type of the resulting value is compatible with the named subclass type.

This downcast inquiry into the actual type of an object can be used when the object has been passed to some general facility, then passed back to more specific code. For example, the general facility might be a dispatch mechanism, or a new storage structure such as a binary balanced tree. These general facilities won't know about specific types, but it might be necessary for the specific program using the general facility to recover the actual type of an object that is returned to it by the general facility.

A downcast should *not* be used when you could add members to a common base class to provide the same functionality. In other words, if you find yourself using the downcast to test whether the object is one or another of several related types, you should add members to the common base class to provide the operations or properties that you are trying to access, then provide separate implementations of those actions or properties in each specific class.

If the downcast operator is to be used in the context of further object expressions (such as references to other members using dot notation) then the downcast must be enclosed in parentheses to emphasize that the downcast happens before the member reference.

```
class Fruit
    property number FruitCount;
end-class;

class Banana extends Fruit
    property number BananaCount;
end-class;
```

In the following code example, first the variables are assigned. All the variable assignments are legal, for Banana is a subtype of Fruit.

```
local Banana &MyBanana = Create Banana();
local Fruit &MyFruit = &MyBanana; /* okay, Banana is a subtype of Fruit */
local number &Num = &MyBanana.BananaCount;
```

The next two lines of code don't produce an error, as &MyFruit is currently a Banana at runtime.

```
&MyBanana = &MyFruit As Banana;
```

```
&Num = (&MyFruit As Banana).BananaCount; /* same as &MyBanana.BananaCount */
```

In the next lines of code, we're reassigning &MyFruit to be of type Fruit, that is, of the superclass Fruit. When you try to reassign &MyFruit as Banana, &MyBanana is assigned as Null, because &MyFruit is no longer of type Banana.

```
&MyFruit = Create Fruit();
```

```
&MyBanana = &MyFruit As Banana; /* assigns Null - &MyFruit isn't a Banana */
```

Exception Handling

Use the Exception class to do exception handling in your PeopleCode. This class provides a try, catch, and throw mechanism so you don't need to check after each operation for errors. Instead, by the structure of the try-catch blocks, you can declare when you are interested in handling exceptions, and how you want to handle them.

Exceptions are instances or subclasses of the PeopleCode Exception class. Oracle recommends that when applicable, application class methods should throw exceptions instead of communicating back to the calling code with return values. You can create exceptions by:

- Creating an Exception base class that encapsulates the built-in function call and handles its function parameters consistently. This is the preferred way.
- Calling the built-in function CreateException.

Since a method can throw exceptions for several different reasons, Oracle recommends that you:

- Create Exception subclasses often.
- Throw strongly typed exceptions.

This allows the calling code to make decisions based on the exception type.

For example, a method that retrieves customer data from a database might throw an exception named SQLException if a database error occurs, or an exception named PrivilegeException if the current user doesn't have the appropriate permissions to perform the operation. There could be different errors causing either of these exception types to be thrown in this method; if necessary, you can write the calling code to examine the specific message numbers and react accordingly.

Oracle recommends that you always catch an exception; if it is not caught, it causes a runtime error. Use a try-catch block.

Not catching an exception causes a runtime error and can cause PeopleTools to display a dialog box with the message catalog entry and information about the technical context of the exception. The reasons for avoiding this by using try-catch blocks are:

- Application code often continues some form of processing even in the event of an exception; you should not assume that the script stops all processing if an exception occurs.
- The error message that PeopleTools displays might not be appropriate for end-users because of its technical information.

Related Topics

- [Exception Class Built-in Functions](#)
- PeopleCode Language Reference: CreateException function
- PeopleCode Language Reference: throw function
- PeopleCode Language Reference: try function

Commenting and Documenting Application Classes

This section contains guidelines for writing method header comments, class header comments, and tags inside the comments.

Understanding Comments and Documentation

Documentation is important in all code, but even more so in application class code, which aims at, and incurs certain overhead in the name of, higher levels of reuse.

There are two types of inline comments:

- Internal comments, which start with `/*` and end with `*/`.
- Comments which can potentially be used to generate API documentation, which start with `/*` and end with `*/`. You can write method header and class header comments for application classes, and you can use the comment tags, with this type of comment.

Warning

In application classes you will see the use of `/+ +/` style comments. *Do not use these in your PeopleCode.* These annotations are generated by the compiler. If you use them, they will be removed the next time you validate, compile, or save your PeopleCode. They are used to provide signature information on application class methods and properties, and are regenerated each time the compiler compiles your application class PeopleCode. Instead, use the standard commenting mechanisms listed above.

PeopleSoft recommends keeping a running line of asterisks along one side of an extensive comment to help the readability of the code by making the entire comment stand out from the surrounding code.

Method Header Comments

The following is an example of documentation conventions for method header comments, which are also suitable for PeopleCode. It contains comment tags, which are explained below the example.

```
/**
 * Description of what method does
 *
 * @param a optional description of param a
 * @param b optional descriptions of param b
 * @exception PrivilegeException thrown if etc, etc
 * @exception SQLException thrown if etc., etc.
 * @return String - description of potential values
 */
Method myMethod
...
End-method;
```

Method Comment Tags

The following are the suggested tags for commenting methods.

Tag	Description
@param <i>N</i>	Specify a description for each method parameter. The name of the parameter is specified after the keyword @param.
@exception <i>name</i>	Specify a description of each exception class. The name of the exception is specified after the keyword @exception. For example, the descriptions can explain what causes certain exceptions to be thrown.
@return <i>Type</i>	Specify a description of the return value. The type of data that is returned is specified after the keyword @return. For example, explain the potential values a method may return, whether it returns null in some circumstances, and so on.

Not all methods require documentation. For example, some simple set or get methods have method signatures that are descriptive enough. In other cases, it may suffice to include a brief sentence in the header explaining what the method does.

As with methods, PeopleCode get or set blocks should also carry method header comments.

Class Header Comments

Header comments for the class should provide descriptive information about the class, and may optionally include additional tags, indicating version and author:

```
/**
 * class description
 *
 * @version 1.0
 * @author amachado
 */
```

Class Header Comment Tags

The following are the suggested tags for commenting class headers.

Tag	Description
@version <i>number</i>	Specify a version number for a class.
@author <i>name</i>	Specify an author for a class.

Designing Base Classes

This section discusses some ways you can design application classes.

Base Classes

Base classes contain a representation of data elements, such as documents, categories, users, and miscellaneous security-related entities.

To design the document data element to be integration-friendly, PeopleSoft recommends you start with a relatively basic base class. Then use more specialized types of documents to create a subclass from that base class, adding the necessary specialized attributes.

Even if you think of ways to use data to drive the business rules, PeopleSoft recommends that you do not place them into your data objects. Replicating business rules for every instance of a data element can be detrimental to performance.

Abstract Base Classes

Abstract base classes contain reusable logic for PeopleCode classes; you do not instantiate them directly. Instead, you instantiate classes that are subclasses of the abstract base class. Abstract base classes use placeholder methods for specialized logic, and its subclasses override those methods to provide the specialized logic.

An example of a candidate for an abstract base class is a class that is used for administering a data entity, such as an invoice. Such a class has a Save method. A Save method can use normal methods to call generic validation routines, talk to the database, and handle errors; it can use the placeholder methods for specialized logic, such as mapping a given data class to a particular database table.

PeopleSoft recommends that you program an active validation check into your placeholder method that causes a runtime error, such as throwing an `UnimplementedMethodException`, if an abstract base class placeholder method hasn't been overridden.

Generic Base Classes

Generic base classes contain reusable logic for PeopleCode classes; you write them to be self-contained, fully implemented, and capable of being instantiated directly. This differs from abstract base classes, which are not instantiated directly and need subclasses that override methods to provide specialized logic.

Some examples of classes that are good candidates for creating generic base classes are:

- Service classes, which typically extend a class that provides infrastructure services, such as configurable application logging.
- Data classes, which typically extend a class that enables you to plug in adapters to support sorting their instances with custom sort algorithms.

Even when a class does not seem generic because it only has a couple of subclasses, you can still define it in your design as a generic base class rather than cloning common code across different classes. The main reason is maintainability: it's easier to maintain a single class than trying to keep track of the same code scattered across your database.

Utility Classes

Some reusable code is the kind you typically don't want to inherit, but you just want to use here and there. Utility classes can serve this purpose.

String parsing, data type conversion, and formatting routines are all good candidates for utility classes. PeopleSoft recommends that anytime you code something that's more than just a line or two, and that seems to be reusable, write it as a utility class.

Declaration of Application Classes

This section provides instructions for declaring application classes.

Declaring Application Classes

Application object references are declared in your PeopleCode programs by either the short name of the class (if the short name is unambiguous amongst all the imported classes), or by the full name of the class. Like all uses of class names, to use the name in a variable declaration, you must have imported the class. Application objects can be of Local, Global, or Component scope.

Every application class is a definition of a new data type in PeopleCode, like the record, rowset, or field data types. The application class includes both the definition of its external interface, its data (properties and instance variables), and its actions (methods), just like the PeopleSoft delivered classes.

Importing Class Names

When you import a class name, fully-qualifying it is optional. The syntax is:

```
<package>:<subpackage>:<...>:<classname or wildcard>
```

PeopleSoft recommends that you individually import each class when you import multiple classes from the same package, instead of using wildcards.

Referencing Superclasses

PeopleSoft recommends that you do not set %Super to a new instance of the current class you are defining because this would start an infinite loop.

```
/* Do not do this! */  
%Super = %This;
```

Declaring Private Methods

PeopleSoft recommends that you use private methods for succinct operations, even if they aren't reused, to improve the readability and maintainability of the code. You can also do this by using many inline comments.

Scope of an Application Class

Application classes can be instantiated only from PeopleCode. These classes can be used anywhere you have PeopleCode, that is, in message notification PeopleCode, Component Interface PeopleCode, record field PeopleCode, and so on.

Application Classes Built-in Functions and Language Constructs

In this section, we discuss the Application classes built-in functions and language constructs, in alphabetical order.

class function

Syntax

```
class ClassName [{extends | implements} SuperClassName]  
    [Method_declarations]  
    [Property_declarations]  
[protected  
    [Method_declarations]  
    [Instance_declarations]  
    [Constant_declaration]]  
[private  
    [Method_declarations]  
    [Instance_declarations]  
    [Constant_declaration]]  
end-class
```

Where *Method_declarations* are of the form:

```
method methodName( [MethodParam1 [, MethodParam2...] [Returns Datatype]]  
[abstract])
```

Where *Property_declarations* are of the form:

```
property DataType PropertyName {[get] | [set]} | [abstract] | [readonly]}
```

Where *Instance_declarations* are of the form:

```
instance DataType &Variable1 [, &Variable2...]
```

Where *Constant_declarations* are of the form:

```
constant &Constant = {Number | String | True | False | Null }
```

Description

Use the Class language construct to build application classes in an application package. All classes within a package must be uniquely named, however, classes contained in different packages do not have to be named uniquely.

External function declarations are allowed in application classes, in the global and component variable declarations, after the class declaration (after the end-class statement), and before the method definitions.

Parameters

Parameter	Description
<i>ClassName</i>	Specify the name of the class that you are creating. All classes within a package must be uniquely named, however, classes contained in different packages do not have to be named uniquely.
<i>extends</i> <i>implements SuperClassName</i>	For a regular class, specify the name of the class that this class extends. If the class is an interface type of class, specify the name of the interface that this class implements. Important: You must import the class to extend it.
<i>Method_declarations</i>	Specify the methods (and their signature) as used in this class.
<i>Property_declarations</i>	Specify the properties, and their usage, in this class.
<i>protected</i>	Use this keyword to declare any methods, constants, or instance variables as protected to the class, that is, are only visible to the declaring class and subclasses.
<i>private</i>	Use this keyword to declare any methods, constants, or instance variables as private to the class, that is, they can't be accessed by any other classes.
<i>Instance_declarations</i>	Specify any variables that should be in any instance (object) of the class.
<i>Constant_declarations</i>	Specify any constants that should be used with this class.

Returns

None.

Example

```

class Example extends ExampleBase
    method NumToStr(&Num As number) Returns string;
    method AppendSlash();
    property number SlashCount get;
    property number ImportantDayOfWeek get set;
    property string SlashString readonly;
    property date ImportantDate;
private
    method NextDayOfWeek(&Dow As number) Returns date;
    constant &Sunday = 1;
    instance number &BaseString;
end-class;

```

Related Topics

- [method function](#)

- [property function](#)
- [get function](#)
- [set function](#)

get function

Syntax

```
get PropertyName  
    StatementList  
end-get
```

Description

Use the get language construct when defining properties in an application class that are implemented by methods rather than an instance variable. All properties within an application class must be uniquely named.

Parameters

Parameter	Description
<i>PropertyName</i>	Specify the name of the property that you're implementing.
<i>StatementList</i>	Returns the value of the property. In other words, this is a method which has no parameters and must return the value of the property.

Returns

Depends on the assignment within *StatementList*

Example

```
get FruitCount  
    Return &MyFruit.Number();  
end-get;
```

Related Topics

- [set function](#)
- PeopleCode Language Reference: Return function

import function

Syntax

```
import PKG_NAME[:SubpackageName[:SubpackageName]]{:ClassName | *}
```

Description

Before you can use a class name, you must first import it using an import declaration statement at the beginning of your program.

An import declaration statement names either all the classes in a package or a single application class.

Parameters

Parameter	Description
<code>import PKG_NAME</code>	Specify the name of the package that you want to import.
<code>:SubpackageName[:SubpackageName] ClassName</code>	Specify the subpackage path to the class. Import only this class of the specified package. You won't have access to any other classes in the specified package, only this one.
<code>*</code>	Import all the classes of the specified package.

Returns

None.

Example

The following gives you access to all the classes in the FRUIT package:

```
import FRUIT:*
```

The following gives you access to the Banana class only in the FRUIT package:

```
import FRUIT:Banana;
```

The following gives you access to the Apple class only from the Fruit subpackage of the DRINKS package:

```
import DRINKS:Fruit:Apple;
```

Related Topics

- [class function](#)

interface function

Syntax

```
interfaceClassName [{extends | implements} SuperClassName]  
    [Method_declarations]  
    [Property_declarations]  
[protected [Method_declarations]  
    [Instance_declarations]
```

```
[Constant_declaration]]  
end-interface
```

Where Method_declarations are of the form:

```
method methodname([MethodParam1 [, MethodParam2...] [Returns Datatype]]  
[abstract])
```

Where Property_declarations are of the form:

```
property DataType PropertyName {[get] | [set]} | [abstract] | [readonly]}
```

Where Instance_declarations are of the form:

```
instance DataType &Variable1 [, &Variable2...]
```

Where Constant_declarations are of the form:

```
constant &Constant = {Number | String | True | False | Null }
```

Description

Use the Interface language construct to create classes of type interface in an application package. An interface class is a purely abstract class.

Parameters

An interface does not have private methods or properties, but all the other parameters are identical to the class language construct.

Returns

None.

Related Topics

- [class function](#)

method function

Syntax

```
method MethodName  
    StatementList  
end-method
```

Description

Use the method statement to define the methods of your application class.

Parameters

Parameter	Description
method <i>MethodName</i>	Specify the name of the method that you are creating.
<i>StatementList</i>	Specify the program of the method, what it does.

Returns

Depends on the method.

Example

```
method NumToStr
    /* Returns String */
    Return String(&Num);
end-method;

method AppendSlash
    &SlashString = &SlashString | "/";
end-method;
```

Related Topics

- PeopleCode Language Reference: Return function

property function

While properties are declared, they do not have explicit definitions like methods. However, you can create definitions to set or get the value of a property. See [set function](#) and [get function](#).

set function

Syntax

```
setPropertyName
    StatementList
end-set
```

Description

Use the set language construct when implementing properties in an application class. All properties within an application class must be uniquely named. The new value for the property is available in the &NewValue parameter of the set definition.

Note

You cannot create a set-only property. You can create only get-set properties.

Parameters

Parameter	Description
<i>set <code>PropertyName</code></i>	Specify the name of the property that you're implementing.
<i><code>StatementList</code></i>	Change the value of the property to be <code>&NewValue</code> .

Returns

None.

Example

```
set FruitCount
  /* &NewValue as String */
  &NewValue = &MyFruit.ActiveRowCount;
  &FruitCount = &NewValue;
end-set;
```

Related Topics

- [get function](#)
- [class function](#)

Application Data Set Classes

Understanding the Application Data Set Classes

The Data Migration Workbench is designed to manage the complexity of migrating configuration data across multiple PeopleSoft systems. Data Migration Workbench uses Application Data Sets (ADS) as its underlying infrastructure. There are five main parts to the Data Migration Workbench:

- The ADS definition designer is used to define ADS definitions, which define the data sets that can be migrated. Each ADS definition includes a record hierarchy. An ADS definition has associated validation PeopleCode specified by an application class, which is the main subject of these topics.
- The Project Editor allows you to interactively create projects containing ADS instance data (that is, the data defined by ADS definitions) and edit their content.
- The Project Manager allows ADS projects to be exported to a file, compared from a file, or copied from a file.
- The Project Reviewer is used to view the results of compares, including validation.
- The Project Approver invokes the approval framework to assure that each project has been properly reviewed and approved before it is copied.

PeopleTools supplies the base class application class, PTADSDEFN:AdsValidationBase, that provides the basic validation described in the following sections.

Prescribed methods described in the following sections of the validation application class are automatically invoked when ADS projects are compared or copied. If you wish to provide additional validation, or to override the base validation, you can implement an application class derived from PTADSDEFN:AdsValidationBase and register that class in the ADS definition designer part of the Data Migration Workbench. The derived class should override one or more of the automatically invoked methods.

Basic Validation

The DoADSValidations method provides basic validation by validating static prompts, translate values, Y/N values, and required fields. Because basic validation is always triggered for any copy or compare, you do not need to explicitly call DoADSValidations. Therefore, even when you do not define an extended application class for a specific ADS definition, basic validations are performed by this method. If a validation error is detected, DoADSValidations returns false and information about the error is written to the target database.

Extended Validation

You can extend the AdsValidationBase base class to define specific validation logic for your data sets. To provide data set-specific validation or transformation logic, you can extend three methods from the base class and define any additional methods and properties as necessary. The following three AdsValidationBase class methods can be extended in your custom application class:

- OnPreCopyCompare

- OnPreUpdate
- OnPostCopy

Related Topics

- Lifecycle Management Guide: Application Data Set Overview
- Lifecycle Management Guide: Defining Extension

Importing Application Data Set Classes

The Application Data Set classes are application classes, not built-in classes, like Rowset, Field, Record, and so on. Before you can use these classes in your PeopleCode program, you must import them into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

Related Topics

- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

AdsValidationBase Class

This section provides an overview of the AdsValidationBase class and discusses: AdsValidationBase class methods.

PeopleTools supplies the base class application class, PTADSDEFN:AdsValidationBase, that provides the basic validation described in the following sections. If you wish to provide additional validation, or to override the base validation, you can implement an application class derived from PTADSDEFN:AdsValidationBase and register that class in the ADS definition designer part of the Data Migration Workbench. The derived class should override one or more of the automatically invoked methods.

Related Topics

- Lifecycle Management Guide: Defining Extension

AdsValidationBase Class Methods

In this section, the AdsValidationBase class methods are presented in alphabetical order.

AdsValidationBase method: AdsValidationBase class

Syntax

```
AdsValidationBase(project_name)
```

Description

This is the base class constructor supplied by Oracle. If the ADS definition does not specify an application class, this constructor will be automatically invoked when ADS projects are copied or compared. If the ADS definition *does* specify an application class, the constructor of the specified class will be automatically invoked when ADS projects are copied or compared. In the latter case, the derived class constructor must invoke this constructor as a %Super.

Parameters

Parameter	Description
<i>project_name</i>	Specifies the data migration project name as a string.

Returns

None.

Example

Use this methodology to instantiate a subclass to perform extended validations:

```
import PTADSDEFN:AdsValidationBase;

class ADSValidations1 implements PTADSDEFN:AdsValidationBase;
    method ADSValidations1(&ProjectName As string);
end-class;

/* constructor */

method ADSValidations1
    /+ &ProjectName as String +/
    %Super = create PTADSDEFN:AdsValidationBase(&ProjectName);
end-method;
```

Related Topics

- [Constructors](#)

The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.

DoADSValidations method: AdsValidationBase class

Syntax

```
DoADSValidations(&ADS_rowset, ADS_name)
```

Description

In the base class supplied by Oracle, this method provides basic validation of static prompts, translate values, Y/N values, and required fields.

The base class method will be automatically invoked for each ADS instance when ADS projects are copied or compared unless the method is overridden in the derived application class for the current ADS definition. If the method is overridden, then the overriding method from the derived class will be automatically invoked. During copy, this method is called for all objects in the project before any objects are copied so that a single validation error anywhere in the project will prevent any objects from being copied.

When this method encounters a validation error, it invokes the ReportErrorModified method to store the error in the database so that it can be reviewed later on the Validation page.

Parameters

Parameter	Description
<i>&ADS_rowset</i>	Specifies the current ADS rowset instance as a rowset object. The rowset contains the data from the source project file.
<i>ADS_name</i>	Specifies the name of the current ADS definition as a string.

Returns

A Boolean value: True if all basic validations succeeded, False if any errors were encountered.

Example

```
import PTADSDEFN:AdsValidationBase;

class AdsValidationSample extends PTADSDEFN:AdsValidationBase
    method AdsValidationSample(&ProjectName As string);
    method DoADSValidations(&ADSRowset As Rowset, &ADSName As string,) Returns
boolean;
end-class;

method AdsValidationSample
    /* &ProjectName as String */
    %Super = create PTADSDEFN:AdsValidationBase(&ProjectName);
end-method;

method DoADSValidations
    /* &ADSRowset as Rowset, */
    /* &ADSName as String */
    /* Returns Boolean */
    /* delegate to the base class DoADSValidations method */
    Return %Super.DoADSValidations(&ADSRowset, &ADSName);
end-method;
```

Related Topics

- [ReportErrorModified method: AdsValidationBase class](#)
- [Understanding Rowset Class](#)
A rowset object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- Lifecycle Management Guide: Defining Extension

OnPreCopyCompare method: AdsValidationBase class

Syntax

```
OnPreCopyCompare(&ADS_rowset, ADS_name)
```

Description

This method will be automatically invoked for each ADS instance when ADS projects are copied or compared unless the method is overridden in the derived application class for the current ADS definition. If the method is overridden, then the overriding method from the derived class will be automatically invoked. During copy, this method is called for all objects in the project before any objects are copied so that a single validation error anywhere in the project will prevent any objects from being copied.

The definition of this method in the base class is an “empty implementation.”

If this method encounters a validation error, it should invoke the ReportErrorModified method to store the error in the database so that it can be reviewed later on the Validation page.

Parameters

Parameter	Description
<i>&ADS_rowset</i>	Specifies the current ADS rowset instance as a rowset object. The rowset contains the data from the source project file.
<i>ADS_name</i>	Specifies the name of the current ADS definition as a string.

Returns

A Boolean value: True if pre-copy compare validations succeeded, False if any errors were encountered.

Example

```
import PTADSDEFN:AdsValidationBase;

class AdsValidationSample extends PTADSDEFN:AdsValidationBase
  method AdsValidationSample(&ProjectName As string);
  method OnPreCopyCompare(&ADSRowset As Rowset, &ADSName As string,) Returns
boolean;
end-class;

method AdsValidationSample
  /+ &ProjectName as String +/
  %Super = create PTADSDEFN:AdsValidationBase(&ProjectName);
end-method;

method OnPreCopyCompare
  /+ &ADSRowset as Rowset, +/
  /+ &ADSName as String +/
  /+ Returns Boolean +/
```

```
/* place code to validate the input rowset here */  
end-method;
```

Related Topics

- [ReportErrorModified method: AdsValidationBase class](#)
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a *Rowset* class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- Lifecycle Management Guide: Defining Extension

OnPreUpdate method: AdsValidationBase class

Syntax

```
OnPreUpdate(&ADS_rowset, ADS_name)
```

Description

This method will be automatically invoked after all data in each distinct ADS name in the project has been copied.

The definition of this method in the base class is an “empty implementation.”

If this method encounters a validation error, it should invoke the `ReportErrorModified` method to store the error in the database so that it can be reviewed later on the Validation page.

If errors are detected by this method, subsequent data will not be copied, but any data already copied to the database will not be rolled back.

Parameters

Parameter	Description
<i>&ADS_rowset</i>	Specifies the current ADS rowset instance as a rowset object. The rowset contains the data from the source project file.
<i>ADS_name</i>	Specifies the name of the current ADS definition as a string.

Returns

A Boolean value: True if pre-copy compare validations succeeded, False if any errors were encountered.

Example

```
import PTADSDEFN:AdsValidationBase;  
  
class AdsValidationSample extends PTADSDEFN:AdsValidationBase  
    method AdsValidationSample(&ProjectName As string);  
    method OnPreUpdate(&ADSRowset As Rowset, &ADSName As string,) Returns  
    boolean;  
end-class;
```

```
method AdsValidationSample
    /+ &ProjectName as String +/
    %Super = create PTADSDEFN:AdsValidationBase(&ProjectName);
end-method;

method OnPreUpdate
    /+ &ADSRowset as Rowset, +/
    /+ &ADSName as String +/
    /+ Returns Boolean +/
    /* place code to validate the input rowset here */
end-method;
```

Related Topics

- [ReportErrorModified method: AdsValidationBase class](#)
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- Lifecycle Management Guide: Defining Extension

OnPostCopy method: AdsValidationBase class

Syntax

```
OnPostCopy(ADS_name, &content_list)
```

Description

This method will be automatically invoked for each ADS instance when ADS projects are copied or compared unless the method is overridden in the derived application class for the current ADS definition. If the method is overridden, then the overriding method from the derived class will be automatically invoked. During copy, this method is called for each object in the project immediately prior to copying the object to the database. This occurs only after OnPreCopyCompare has been called for all objects with no validation errors.

The definition of this method in the base class is an “empty implementation.”

This method should be used for validations that require SQL access to all the data that was in the project and in the target database simultaneously. If any errors are encountered and cleanup is required, updates can be performed by this method.

If this method encounters a validation error, it should invoke the ReportErrorModified method to store the error in the database so that it can be reviewed later on the Validation page.

In addition, the OnPreUpdate method can perform database updates. If severe errors are detected by this method, the current data set will not be copied and subsequent data sets will not be copied; however, any data sets already copied to the database will not be rolled back.

Parameters

Parameter	Description
<i>ADS_name</i>	Specifies the name of the current ADS definition as a string.

Parameter	Description
<i>&content_list</i>	Specifies an array of integers that identify the keys of the objects in the current project for the current ADS name. To translate this array into the keys of objects, one can query the project definition tables in the target database as follows: <pre> SELECT PTADSCONTENTID, SEQNBR, PTBINDSYMBOL, PTADSBINDEXPR FROM PSPROJBINDITEM WHERE PROJECTNAME = :1 AND PTADSNAME = :2 AND PTADSCONTENTID IN (:3, :4, ...) ORDER BY SEQNBR, PTADSCONTENTID"); </pre> The fields and bind variables are defined as follows: • :1 – The project name (which is stored in the AdsValidationBase property called strProjectName). • :2 – The ADS definition name. • :3, :4, ... – The integers in the <i>&content_list</i> array. • PTBINDSYMBOL – The ADS key name. • PTADSBINDEXPR – The ADS key value. • SEQNBR – The key sequence number. The keys thus retrieved are the unique keys of the top-level record in the ADS definition. They are also keys, but generally not unique keys, of the child records in the ADS definition. Once the keys are retrieved, you can use the rowset API to validate the data. The records in the rowset can be determined from the ADS definition with the following query: <pre> SELECT RECNAME, PTPARENTRECNAME FROM PSADSDEFNITEM WHERE PTADSNAME = :1 </pre> The fields and bind variables are defined as follows: • :1 – The ADS definition name. • RECNAME – The child record name. • PTPARENTRECNAME – The parent record name or blank when RECNAME is the root record.

Returns

A Boolean value: True if post-copy compare validations succeeded, False if any errors were encountered.

Example

```
import PTADSDEFN:AdsValidationBase;

class AdsValidationSample extends PTADSDEFN:AdsValidationBase
  method AdsValidationSample(&ProjectName As string);
  method OnPostCopy(&AdsName As string, &ContentList As array of integer)
Returns boolean;
end-class;

method AdsValidationSample
  /+ &ProjectName as String +/
  %Super = create PTADSDEFN:AdsValidationBase(&ProjectName);
end-method;

method OnPostCopy
  /+ &AdsName As string +/
  /+ &ContentList As array of integer +/
  /* place code to validate the data just copied here */
end-method;
```

Related Topics

- [ReportErrorModified method: AdsValidationBase class](#)
- [Understanding Rowset Class](#)
A rowset object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- Lifecycle Management Guide: Defining Extension

ReportErrorModified method: AdsValidationBase class

Syntax

```
ReportErrorModified(&recReportKey, &recReportError)
```

Description

Invoke the ReportErrorModified method to write validation errors to the database to be reviewed later on the Validation page.

Invocation of the ReportErrorModified method is optional and can be skipped if error reporting in the validation report is not a requirement for your custom validation.

! Important

ReportErrorModified is a protected method and *must not be* extended in your custom application class.

Parameters

Parameter	Description
<i>&recReportKey</i>	Specifies a record based on the PSCOMPOBJKEY record definition.
<i>&recReportError</i>	Specifies a record based on the PSCOMPOBJERR record definition.

Returns

None.

Example**Example 1**

The following pseudo-code excerpt demonstrates how to invoke the ReportErrorModified method:

```
Local Record &recReportKey, &recReportError, &recParent;

&recReportKey = CreateRecord(Record.PSCOMPOBJKEY);
&recReportError = CreateRecord(Record.PSCOMPOBJERR);

*** error processing ***

If * error type 1 *
/* Set error record field values */
  &recReportError.PTADSVALIDITYTYPE.Value = "";
  ***
Else
  If * error type 2 *
  /* Set error record field values */
    &recReportError.PTADSVALIDITYTYPE.Value = "";
    ***
  End-If;
End-If;

ReportErrorModified(&recReportKey, &recReportError);
```

Example 2

The PTADSDEFN:AdsValidationBase:ProcessValidationError method provides a complete example of how to invoke ReportErrorModified:

```
method ProcessValidationError
  /* &RecError as Record */
  Local number &i, &j, &k, &m, &n, &p, &q, &r, &s, &u, &nCtr, &x, &nBegin;
  Local Field &fldError;
  Local Record &recReportKey, &recReportError, &recParent;
  Local string &strPTRecName, &strPTRecValue, &strKeyColName,
&strKeyColValue, &strFieldType, &strType;
  Local Rowset &rsParent;
  Local array of string &arrRecHierarchy;
```

```

    Local %metadata:RecordDefn:RecordDefn_Manager &mgr = create
%metadata:RecordDefn:RecordDefn_Manager();
    Local %metadata:Key &key;
    Local %metadata:RecordDefn:RecordDefn &defn;
    Local string &strTableName;
    &arrRecHierarchy = CreateArrayRept("", 0);
    &recReportKey = CreateRecord(Record.PSCOMPOBJKEY);
    &recReportError = CreateRecord(Record.PSCOMPOBJERR);
    &i = 1;
    &r = Value(&arrRecName [&arrRecName.Find(&RecError.Name)][2]);
    &q = 1;
    /* Logic to Populate the PTRECNAMEs and PTNUMKEYS */
    For &s = &r To 1 Step - 1
        &strPTRecName = "PTRECNAME" | String(&s);
        If &s = &r Then
            &strPTRecValue = &RecError.Name;
            &recParent = &RecError;
        Else
            &rsParent = &recParent.ParentRow.ParentRowset.ParentRowset;
            &strPTRecValue = &rsParent.DBRecordName;
            &recParent = &rsParent.GetRow(1).GetRecord(@"Record." |
&strPTRecValue));
        End-If;
        &recReportKey.GetField(@"Field." | &strPTRecName).Value =
&strPTRecValue;
        &m = &arrRecName.Find(&strPTRecValue);
        &key = create %metadata:Key(Key:Class_Record, &strPTRecValue);
        &defn = &mgr.GetDefn(&key);
        &strTableName = &defn.TableName;
        &recReportKey.GetField(@"Field." | "PTTABLENAME" | String(&s)).Value
= &strTableName;
        &recReportKey.GetField(@"Field." | "PTNUMKEYS" | String(&s)).Value =
&arrKeyFieldNameType [&m].Len;
        &arrRecHierarchy.Push(&strPTRecValue);
    End-For;
    /* Logic to Populate the PTKEYCOLs and PTKEYTYPES */
    For &u = &arrRecHierarchy.Len To 1 Step - 1
        &strPTRecValue = &arrRecHierarchy [&u];
        &m = &arrRecName.Find(&strPTRecValue);
        For &p = 1 To &arrKeyFieldNameType [&m].Len
            &strKeyColName = "PTKEYCOL" | String(&q);
            &strKeyColValue = &arrKeyFieldNameType [&m][&p][1];
            &strType = &arrKeyFieldNameType [&m][&p][2];
            Evaluate &strType
            When "CHAR"
                &strFieldType = "0";
                Break;
            When "LONGCHAR"
                &strFieldType = "1";
                Break;
            When "NUMBER"
                &strFieldType = "2";
                Break;
            When "SIGNEDNUMBER"
                &strFieldType = "3";
                Break;

```



```

        When "DATE"
            &strFieldType = "4";
            Break;
        When "TIME"
            &strFieldType = "5";
            Break;
        When "DATETIME"
            &strFieldType = "6";
            Break;
        When "IMAGE"
            &strFieldType = "8";
            Break;
        When "IMAGEREFERENCE"
            &strFieldType = "9";
            Break;
        End-Evaluate;
        &recReportKey.GetField(@"Field." | &strKeyColName)).Value =
&strKeyColValue;
        &recReportKey.GetField(@"Field.PTKEYTYPE" | String(&q))).Value =
&strFieldType;
        &q = &q + 1;
    End-For;
End-For;
/* Logic to Populate the PTKEYVALUES */
&nCtr = 0;
For &u = &r To 1 Step - 1
    &nCtr = &nCtr + &recReportKey.GetField(@"Field.PTNUMKEYS" |
String(&u))).Value;
End-For;
For &x = &r To 1 Step - 1
    &nBegin = &nCtr - (&recReportKey.GetField(@"Field.PTNUMKEYS" |
String(&x))).Value) + 1;
    If &x = &r Then
        &recParent = &RecError;
    Else
        &rsParent = &recParent.ParentRow.ParentRowset.ParentRowset;
        &recParent = &rsParent.GetRow(1).GetRecord(@"Record." |
&rsParent.DBRecordName));
    End-If;
    For &j = 1 To &recReportKey.GetField(@"Field.PTNUMKEYS" |
String(&x))).Value
        If &x = &r Then
            &recReportKey.GetField(@"Field.PTKEYVALUE" |
String(&nBegin))).Value = &RecError.GetField(@"Field." |
&recReportKey.GetField(@"Field.PTKEYCOL" | String(&nBegin))).Value));Value;
        Else
            &recReportKey.GetField(@"Field.PTKEYVALUE" |
String(&nBegin))).Value = &recParent.GetField(@"Field." |
&recReportKey.GetField(@"Field.PTKEYCOL" | String(&nBegin))).Value));Value;
        End-If;
        &nBegin = &nBegin + 1;
        &nCtr = &nCtr - 1;
    End-For;
End-For;
/* Logic to actually populate the PSPRJVALIDERR main fields and then
insert into the table */

```

```

For &k = 1 To &RecError.FieldCount
    &fldError = &RecError.GetField(&k);
    If &fldError.EditError And
        &arrFieldNamesOfDynamicPrompts.Find(&fldError.Name) = 0 Then
        &recReportError.PTADSVALIDIDTYPE.Value = " ";
        &recReportError.PTPARAMETERVAL1.Value = " ";
        &recReportError.PTPARAMETERVAL2.Value = " ";
        &recReportError.PTPARAMETERVAL3.Value = " ";
        &recReportError.PTPARAMETERVAL4.Value = " ";
        &recReportError.MESSAGE_SET_NBR.Value = 0;
        &recReportError.MESSAGE_NBR.Value = 0;
        &recReportError.MESSAGE_TEXT_254.Value = " ";
        &recReportError.MESSAGE_TEXT_LONG.Value = " ";
        &recReportError.MSG_SEVERITY.Value = " ";
        If &fldError.IsEditTable Then
            &recReportError.PTADSVALIDIDTYPE.Value = "S";
            &recReportError.PTPARAMETERVAL1.Value = &RecError.Name;
            &recReportError.PTPARAMETERVAL2.Value = &fldError.Name;
            &recReportError.PTPARAMETERVAL3.Value = &fldError.Value;
            &recReportError.PTPARAMETERVAL4.Value = &fldError.PromptTableName;
            &recReportError.MESSAGE_SET_NBR.Value = "257";
            &recReportError.MESSAGE_NBR.Value = "501";
            &recReportError.MESSAGE_TEXT_254.Value = MsgGet(257, 501,
"Message Not Found", &fldError.Value, &fldError.Name, &RecError.Name,
&fldError.PromptTableName);
            &recReportError.MESSAGE_TEXT_LONG.Value = MsgGetExplainText(257,
501, "Message Not Found");
            &recReportError.MSG_SEVERITY.Value = "E";
            &bValidationError = True;
        Else
            If &fldError.IsEditXlat Then
                &recReportError.PTADSVALIDIDTYPE.Value = "X";
                &recReportError.PTPARAMETERVAL1.Value = &RecError.Name;
                &recReportError.PTPARAMETERVAL2.Value = &fldError.Name;
                &recReportError.PTPARAMETERVAL3.Value = &fldError.Value;
                &recReportError.MESSAGE_SET_NBR.Value = "257";
                &recReportError.MESSAGE_NBR.Value = "503";
                &recReportError.MESSAGE_TEXT_254.Value = MsgGet(257, 503,
"Message Not Found", &fldError.Value, &fldError.Name, &RecError.Name);
                &recReportError.MESSAGE_TEXT_LONG.Value =
MsgGetExplainText(257, 503, "Message Not Found");
                &recReportError.MSG_SEVERITY.Value = "E";
                &bValidationError = True;
            Else
                If &fldError.IsYesNo Then
                    &recReportError.PTADSVALIDIDTYPE.Value = "Y";
                    &recReportError.PTPARAMETERVAL1.Value = &RecError.Name;
                    &recReportError.PTPARAMETERVAL2.Value = &fldError.Name;
                    &recReportError.PTPARAMETERVAL3.Value = &fldError.Value;
                    &recReportError.MESSAGE_SET_NBR.Value = "257";
                    &recReportError.MESSAGE_NBR.Value = "504";
                    &recReportError.MESSAGE_TEXT_254.Value = MsgGet(257, 504,
"Message Not Found", &fldError.Value, &fldError.Name, &RecError.Name);
                    &recReportError.MESSAGE_TEXT_LONG.Value =
MsgGetExplainText(257, 504, "Message Not Found");
                    &recReportError.MSG_SEVERITY.Value = "E";
                End If
            End If
        End If
    End If
End For

```

```
        &bValidationError = True;
    Else
        If &fldError.IsRequired Then
            &recReportError.PTADSVALIDTYPE.Value = "R";
            &recReportError.PTPARAMETERVAL1.Value = &RecError.Name;
            &recReportError.PTPARAMETERVAL2.Value = &fldError.Name;
            &recReportError.MESSAGE_SET_NBR.Value = "257";
            &recReportError.MESSAGE_NBR.Value = "502";
            &recReportError.MESSAGE_TEXT_254.Value = MsgGet(257,
213: 502, "Message Not Found", &fldError.Name, &RecError.Name);
            &recReportError.MESSAGE_TEXT_LONG.Value =
214: MsgGetExplainText(257, 502, "Message Not Found");
            &recReportError.MSG_SEVERITY.Value = "E";
            &bValidationError = True;
        Else
            End-If;
        End-If;
    End-If;
    End-If;
    %This.ReportErrorModified(&recReportKey, &recReportError);
    End-If;
    End-For;
end-method;
```

Related Topics

- Lifecycle Management Guide: Defining Extension

9

Application Services Framework Classes

ServiceAPI Class

This section provides an overview of the ServiceAPI class and discusses:

- ServiceAPI class methods
- ServiceAPI class properties

For Application Services, create an application class extending the PTCBAPPLSVCDEFN:ApplicationServiceBase application class and then implement the invokeService() method to define your application logic.

Use the %This.ServiceAPI property to read and write parameters and other Application Services metadata.

Related Topics

- Integration Broker: Creating a New Consumer Application Service

ServiceAPI Methods

In this section, the ServiceAPI class methods are presented in alphabetical order.

clearRequestHeaders method: Service API class

Syntax

```
clearRequestHeaders()
```

Description

Clears all the populated Request headers. This method is valid for Consumer Application Services only.

Parameters

None.

Returns

None.

Example

```
&ServiceAPI.clearRequestHeaders();
```

getInputParameter method: ServiceAPI class

Syntax

```
getInputParameter(parameter_name)
```

Description

Use this method to retrieve input value based on parameter defined on the application service.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the input parameter (as a string).

Returns

Any.

Values can be the following:

- Boolean
- Date
- Document
- Integer
- JSON Object
- Number
- Number Array
- String
- String Array
- Time

Example

```
&state = %This.ServiceAPI.getInputParameter("conditions");
```

Related Topics

- [setInputParameter method: ServiceAPI class](#)

getInputRow method: ServiceAPI class

Syntax

```
getInputRow(index)
```

Description

Use this method to retrieve the specified input message row based on the index.

Parameters

Parameter	Description
<i>index</i>	Specifies the index (as a Number) of the row to retrieve.

Returns

The specified message row.

Example

```
&jsNoteBook = %This.ServiceAPI.getInputRow (1).getParameter("notebook");
```

getInputRowCount method: ServiceAPI class

Syntax

```
getInputRowCount()
```

Description

Use this method to return the input row count.

Parameters

None.

Returns

Number.

Example

```
&RowCount = &ServiceAPI.getInputRowCount();
```

getLocationURL method: ServiceAPI class

Syntax

```
getLocationURL(URI_index)
```

Description

Use this method to create the URL string based on the passed in URI index.

Parameters

Parameter	Description
<i>URI_index</i>	Specifies the URI index defined on the application service.

Returns

A String; the URL.

Example

```
%This.ServiceAPI.setLocationTemplateParameter("musicCode", &intValue, True);  
This.ServiceAPI.setResponseHeader("Location",%This.ServiceAPI.getLocationURL(1  
));
```

getOutputContentData method: ServiceAPI class

Syntax

```
getOutputContentData()
```

Description

Use the `getOutputContentData` method to retrieve the actual content data sent back from the third party for consumer REST call.

Parameters

None.

Returns

A String value.

Example

```
&RawData = &ServiceAPI.getOutputContentData();
```

getOutputParameter method: ServiceAPI class

Syntax

```
getOutputParameter(parameter_name)
```

Description

Use this method to retrieve output value based on parameter defined on the application service.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the output parameter (as a string).

Returns

Any.

Values can be the following:

- Boolean
- Date
- Document
- Integer
- JSON Object
- Number
- Number Array
- String
- String Array
- Time

Example

```
&state = %This.ServiceAPI.getOutputParameter("conditions");
```

Related Topics

- [setOutputParameter method: ServiceAPI class](#)

getOutputRow method: ServiceAPI class

Syntax

```
getOutputRow(index)
```

Description

Use this method to retrieve the specified output message row based on the index.

Parameters

Parameter	Description
<i>index</i>	Specifies the index (as a Number) of the row to retrieve.

Returns

The specified message row.

Example

```
%This.ServiceAPI.getOutputRow(1).setParameter("tools", &Inst);
```

Related Topics

- [InsertOutputRow method: ServiceAPI class](#)

getOutputRowCount method: ServiceAPI class

Syntax

```
getOutputRowCount()
```

Description

Use this method to return the output row count.

Parameters

None.

Returns

Number.

Example

```
&RowCount = &ServiceAPI.getOutputRowCount();
```

getRequestHeaderValue method: ServiceAPI class

Syntax

```
getRequestHeaderValue(header_name)
```

Description

Use this method to retrieve request header value based on header defined on the application service.

Parameters

Parameter	Description
<i>header_name</i>	Specifies the name of the request header (as a String).

Returns

A String; the value of the request header.

Example

```
&headervalue = %This.ServiceAPI.getRequestHeaderValue("Accept-Language");
```

getTemplateParameter method: ServiceAPI class

Syntax

```
getTemplateParameter(parameter_name)
```

Description

Use this method to retrieve template value based on parameter defined on the application service.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the input parameter (as a string).

Returns

Any.

Values can be the following:

- Boolean
- Date
- Decimal
- Integer
- String
- Time
- Array of Any

Example

```
&state = %This.ServiceAPI.getTemplateParameter("instrument");
```

InsertOutputRow method: ServiceAPI class

Syntax

```
InsertOutputRow()
```

Description

Use this method to insert an empty message row.

Parameters

None.

Returns

None.

Example

```
%This.ServiceAPI.InsertOutputRow();  
%This.ServiceAPI.OutputRows [1].setParameter("numPlayers", 3);  
%This.ServiceAPI.OutputRows [1].setParameter("instrument", &value);
```

Related Topics

- [getInputRow method: ServiceAPI class](#)

loadRequestHeaders method: ServiceAPI class

Syntax

```
loadRequestHeaders()
```

Description

Loads all the Request headers defined on the Application Service. This method is valid for Consumer Application Services only.

Parameters

None.

Returns

None.

Example

```
&ServiceAPI.loadRequestHeaders();
```

setInputParameter method: ServiceAPI class

Syntax

```
setInputParameter(parameter_name,parameter_type)
```

Description

Use this method to set input value based on parameter defined on the application service.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the input parameter (as a string).
<i>parameter_type</i>	Specifies the type of the input parameter (as Any). Values can be the following: • Boolean • Date • Document • Integer • JSON Object • Number • Number Array • String • String Array • Time

Returns

None.

Example

```
%This.ServiceAPI.setInputParameter("conditions", &state);
```

Related Topics

- [getInputParameter method: ServiceAPI class](#)

setLocationTemplateParameter method: ServiceAPI class

Syntax

```
setLocationTemplateParameter(template_name,template_type,template_collection)
```

Description

Use this method to set the variable value defined on the base template defined on the application service.

Parameters

Parameter	Description
<i>template_name</i>	Specifies the name of the template parameter (as a String).

Parameter	Description
<i>template_type</i>	Specifies the type of the template parameter (as Any). Values can be the following: • Boolean • Date • Decimal • Integer • String • Time • Array of Any
<i>template_collection</i>	Specifies whether the template parameter is a collection or not. True if the template parameter is a collection; false otherwise.

Returns

None.

Example

```
%This.ServiceAPI.setLocationTemplateParameter("instrument", "drums", False);  
%This.ServiceAPI.setLocationTemplateParameter("timein", %Time, False);
```

Related Topics

- [getLocationURL method: ServiceAPI class](#)

setOutputParameter method: ServiceAPI class

Syntax

```
setOutputParameter(parameter_name,parameter_type)
```

Description

Use this method to set output value based on parameter defined on the application service.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the output parameter (as a string).

Parameter	Description
<i>parameter_type</i>	Specifies the type of the output parameter (as Any). Values can be the following: • Boolean • Date • Document • Integer • JSON Object • Number • Number Array • String • String Array • Time

Returns

None.

Example

```
import PTCBAPPLSVCDEFN:ApplicationServiceBase;

class STUDENT extends PTCBAPPLSVCDEFN:ApplicationServiceBase
  method invokeService();
end-class;

method invokeService
  /* Extends/implements PTCBAPPLSVCDEFN:ApplicationServiceBase.invokeService
  */
  Local JSONArray &jsStudentArray;
  Local array of string &stud;
  &jsStudentArray = CreateJSONArray();
  &jsStudentArray.AddElement(&stud [1]);
  &jsStudentArray.AddElement(&stud [2]);
  %This.ServiceAPI.setOutputParameter("student", &jsStudentArray);
end-method;
```

Related Topics

- [getOutputParameter method: ServiceAPI class](#)

setOverrideURL method: ServiceAPI class

Syntax

```
setOverrideURL(&URL)
```

Description

Use the setOverrideURL method to override the URL sent to the third party for consumer REST call.

Parameters

Parameter	Description
<i>&URL</i>	Specifies the URL as a String.

Returns

None.

Example

```
&ServiceAPI.SetOverrideURL("URL");
```

setRequestHeader method: ServiceAPI class

Syntax

```
setRequestHeader(parameter_name, parameter_value)
```

Description

Use this method to populate the Request HTTP Header value based on the parameter defined.

Parameters

Parameters	Description
<i>parameter_name</i>	Specifies the name of the request header parameter.
<i>parameter_value</i>	Specifies the value passed as a string.

Returns

None.

Example

```
&ServiceAPI.setRequestHeader("Content-Encoding", "gzip");
```

setResponseHeader method: ServiceAPI class

Syntax

```
setResponseHeader(header_name, header_value)
```

Description

Use this method to set the response header value based on header defined on the application service.

Parameters

Parameter	Description
<i>header_name</i>	Specifies the name of the response header (as a String).
<i>header_value</i>	Specifies the value of the response header (as a String).

Returns

None.

Example

```
%This.ServiceAPI.setResponseHeader("Language", "eng");
```

setTemplateParameter method: ServiceAPI class

This topic discusses the setTemplateParameter method for the ServiceAPI class.

Syntax

```
setTemplateParameter(parameter_name, anyValue, boolean)
```

Description

Use this method to populate the template value based on the parameter defined, the input value, and if the parameter is defined as a collection. This method is valid for Consumer Application Services only.

Parameters

Parameter	Description
<i>parameter_name</i>	Specifies the name of the template parameter.
<i>anyValue</i>	Specifies the type of the template parameter (as Any). Values can be the following: • Boolean • Date • Integer • Number • Number Array • String • String Array • Time

Returns

None.

Example

```
%This.ServiceAPI.setTemplateParameter("pilot", &Name, False);
```

ServiceAPI Properties

In this section, the ServiceAPI class properties are presented in alphabetical order.

HttpMethod property: ServiceAPI class

Description

Use the HttpMethod property to return the HTTP method that was invoked for the transaction.

Example

```
If %This.ServiceAPI.HttpMethod = %AppService_HTTP_GET then  
    /* process a GET request */  
End-If;
```

HttpStatusCode property: ServiceAPI class

Description

The HttpStatusCode property returns the actual HTTP response code from the third party as an integer value.

Examples of response code are 200, 400.

This property is read-only.

Example

```
&RespCode = &ServiceAPI.HttpStatusCode;
```

InputRows property: ServiceAPI class

Description

Use the InputRows property to get values on the specified row.

Example

```
&Inst = %This.ServiceAPI.InputRows [1].getParameter("instrument");
```

Related Topics

- [OutputRows property: ServiceAPI class](#)

IsChatbot property: ServiceAPI class

Description

Use the IsChatbot property to determine whether the request came from ODA.

Example

```
if %This.ServiceAPI.IsChatbot then
/* perform Chatbot specific update */
End-if;
```

OutputRows property: ServiceAPI class

Description

Use the OutputRows property to set values on the specified row.

Example

```
%This.ServiceAPI.OutputRows [1].setParameter("numPlayers", 3);
```

Related Topics

- [InputRows property: ServiceAPI class](#)

OverrideResultStateDesc property: ServiceAPI class

Description

Use the OverrideResultStateDesc property to override the result state description.

Example

```
%This.ServiceAPI.ResultState = "Failure";
%This.ServiceAPI.OverrideResultStateDesc = "bad data";
```

ResponseException property: ServiceAPI class

Description

The ResponseException property returns a string of the actual exception (if any) that was sent back from the third party. Depending on the provider of the integration, the HTTP response code (if an error response code) includes additional information about the error.

This property is read-only.

ResponseFailed property: ServiceAPI class

Description

The ResponseFailed property specifies whether the response failed from the third party. This property takes a Boolean value: true, if the response failed; false otherwise.

This property is read-only.

Example

```
If &ServiceAPI.ResponseFailed Then
    /* throw error */
Else
    /* process response */
End-If;
```

ResultState property: ServiceAPI class

Description

Use the ResultState property to set the result state to be returned for the request.

Example

```
%This.ServiceAPI.ResultState = "SUCCESS - PLAY MUSIC";
```

RootResource property: ServiceAPI class

Description

The root resource of the URI that was used to invoke the application service request.

Example

```
&RootResource = %This.ServiceAPI.RootResource;
```

ServiceID property: ServiceAPI class

Description

The service ID that is used to invoke the application service request.

Example

```
&SrvID = %This.ServiceAPI.ServiceID;
```

URIIndex property: ServiceAPI class

Description

Use the URIIndex property to return the URI index that is invoked as defined on the application service.

Example

```
If %This.ServiceAPI.HttpMethod = %AppService_HTTP_GET Then
  If %This.ServiceAPI.URIIndex = 1 Then
    /* process request */
  End-if;
End-if;
```

UserException property: ServiceAPI class

Description

Use the UserException property to specify whether a user handles any exception. This property takes a Boolean value: true, if the exception is handled by a user; false otherwise.

This property is read/write.

API Repository

Understanding the PeopleSoft API Repository

This section provides an overview of the PeopleSoft API Repository and discusses how to access the repository.

The PeopleSoft API Repository

The PeopleSoft API Repository enables PeopleCode and third-party integrators to discover the internally available classes, methods, and properties that are provided by PeopleSoft for integration. The repository is useful to third-party integrators who integrate in a generic fashion: middleware providers, testing tool providers, and automated documentation providers.

The PeopleSoft API Repository is *not* a necessary interface for integrators who integrate at the business-rule level, such as integration with an expense report, and so on. Those integrators should use component interfaces.

The repository describes available PeopleSoft APIs and provides mechanisms to determine the classes that are available in the API, the properties of each class, the methods of a class (along with the required parameters), and information concerning which group a class belongs to (known as a namespace).

The process of determining information about the API is known as *discovery*. Third-party integrators use information found through discovery to drive generic integration tools.

The repository is divided into namespaces. Each namespace contains a collection of related classes. Example namespaces include "PeopleSoft," "ComponentInterface," "Trees," and "BusinessInterlinks".

A *class* defines a related set of methods and properties. Using the repository, you can determine the methods and properties that are available and that can be used on any object returned by a call to the PeopleSoft API. An instance of a class is known as an object.

A *property* is a data item of an object that has both a name and type (string, number, Boolean, and so on are examples of types). Some properties are used for inputting data to a class, some are used for getting data from a class, and some are used for both. Whether a property is used for input or output or both is known as usage.

A *method* is a function that you can call on an object. Methods have a name and a return type (string, number, Boolean, and so on). Methods also have a collection of arguments that must be set prior to invoking the method. Methods arguments have identical attributes to properties.

Example of Accessing the Repository Using PeopleCode

This example gets information for the class ABS_HIST from the Namespace component interface and writes it to the file BC.TXT:

This is the complete code sample, followed by the flat file. The next section presents steps that explain each line.

```

Local ApiObject &MYSESSION;
Local ApiObject &MYCI;
Local string &OutTEXT;
Local File &MYFILE;
&MYSESSION = %Session;

&MYFILE = GetFile("CI.txt", "A", "UTF8");
&NAMESPACES = &MYSESSION.Repository.Namespaces;
&NAMESPACE = &NAMESPACES.ItemByName("CompIntfc");
&OutTEXT = "Namespace = " | &NAMESPACE.Name;
&MYFILE.WriteLine(&OutTEXT);
&CLASSES = &NAMESPACE.classes;
&CLASS = &CLASSES.ItemByName("ABS_HIST");
&OutTEXT = "  Class: " | &CLASS.Name;
&MYFILE.WriteLine(&OutTEXT);
&OutTEXT = "    Methods";
&MYFILE.WriteLine(&OutTEXT);
&METHODS = &CLASS.methods;
For &K = 0 To &METHODS.Count - 1
  &METHOD = &METHODS.item(&K);
  &OutTEXT = "      " | &METHOD.name | ": " | &METHOD.Type

  &MYFILE.WriteLine(&OutTEXT);
  &ARGUMENTS = &METHOD.arguments;
  For &M = 0 To &ARGUMENTS.count - 1
    &ARGUMENT = &ARGUMENTS.item(&M);
    &OutTEXT = "        " | &ARGUMENT.name | ": " | &ARGUMENT.type;
    &MYFILE.WriteLine(&OutTEXT);
  End-For;
End-For;
&OutTEXT = "    Properties";
&MYFILE.WriteLine(&OutTEXT);
&PROPERTIES = &CLASS.properties;
For &I = 0 To &PROPERTIES.count - 1
  &PROPERTY = &PROPERTIES.item(&I);
  &OutTEXT = "      " | &PROPERTY.name | ": " | &PROPERTY.type;
  &MYFILE.WriteLine(&OutTEXT);
End-For;
&MYFILE.Close();

```

The previous code produces the following flat file:

```

Namespace = CompIntfc
  Class: ABS_HIST
    Methods
      Get: Boolean
      Save: Boolean
      Cancel: Boolean
      Find: ABS_HIST
      GetPropertyByName: Variant
      Name: String
      SetPropertyByName: Number

```

```

    Name: String
    Value: Variant
    GetPropertyInfoByName: CompIntfcPropertyInfo
    Name: String
Properties
    EMPLID: String
    LAST_NAME_SRCH: String
    NAME: String
    ABSENCE_HIST: ABS_HIST_ABSENCE_HISTCollection
    interactiveMode: Boolean
    getHistoryItems: Boolean
    componentName: String
    compIntfcName: String
    stopOnFirstError: Boolean
    propertyInfoCollection: CompIntfcPropertyInfoCollection
    createKeyInfoCollection: CompIntfcPropertyInfoCollection
    getKeyInfoCollection: CompIntfcPropertyInfoCollection
    findKeyInfoCollection: CompIntfcPropertyInfoCollection

```

The PeopleCode Example Explanation

This procedure goes through the PeopleCode example line by line.

To retrieve information from the API Repository:

1. Get a session object.

Before you can access the PeopleSoft API Repository, you have to get a session object. The session controls access to PeopleSoft, provides error tracing, enables you to set the runtime environment, and so on.

```
&MYSESSION = %Session;
```

2. Open the file.

As this text will be written to a flat file, the next step is to open the file. If the file is already created, the new text is appended to the end of it. If the file hasn't been created, the GetFile built-in function creates the file.

```
&MYFILE = GetFile("CI.txt", "A", "UTF8");
```

3. Get the namespace you want.

Use the Namespaces property on the repository object to get a collection of available namespaces. We want to discover information about a component interface, so we specify CompIntfc in the ItemByName method to get that namespace. With ItemByName, you must specify a namespace that already exists. You'll receive a runtime error if you specify one that doesn't exist.

```
&NAMESPACES = &MYSESSION.Repository.Namespaces;
&NAMESPACE = &NAMESPACES.ItemByName("CompIntfc");
```

4. Write the text to the file.

Because all of the information discovered is being written to a file, the next step is to write text to the file. This code writes the string "Namespace", followed by the name of the namespace, to the file.

```
&OutTEXT = "Namespace = " | &NAMESPACE.Name;
&MYFILE.WriteLine(&OutTEXT);
```

5. Get the class that you want and write text to the file.

Use the Classes property on the Namespace object to get a collection of all the available classes. We want to discover information about the component interface named ABS_HIST, so we specify that using ItemByName. Then we write that information to the file.

```
&CLASSES = &NAMESPACE.classes;
&CLASS = &CLASSES.ItemByName("ABS_HIST");
&OutTEXT = " Class: " | &CLASS.Name;
&MYFILE.WriteLine(&OutTEXT);
```

6. Get the methods and arguments, and write the information to the file.

Use the Methods property on the Class object to get a collection of all the available methods. After you get each method and write the information to the file, loop through and find all of the arguments for the method, then write that information to the file.

```
&OutTEXT = "      Methods";
&MYFILE.WriteLine(&OutTEXT);
&METHODS = &CLASS.methods;
For &K = 0 To &METHODS.Count - 1
    &METHOD = &METHODS.item(&K);
    &OutTEXT = "          " | &METHOD.name | ": " | &METHOD.Type;
    &MYFILE.WriteLine(&OutTEXT);
    &ARGUMENTS = &METHOD.arguments;
    For &M = 0 To &ARGUMENTS.count - 1
        &ARGUMENT = &ARGUMENTS.item(&M);
        &OutTEXT = "          " | &ARGUMENT.name | ": " | &ARGUMENT.type;
        &MYFILE.WriteLine(&OutTEXT);
    End-For;
End-For;
```

7. Get the properties and write the information to the file.

Use the Properties property on the Class object to get a collection of all the available properties. Write each property, with its type, to the file. At the end of the program, close the file.

```
&OutTEXT = "      Properties";
&MYFILE.WriteLine(&OutTEXT);
&PROPERTIES = &CLASS.properties;
For &I = 0 To &PROPERTIES.count - 1
    &PROPERTY = &PROPERTIES.item(&I);
    &OutTEXT = "          " | &PROPERTY.name | ": " | &PROPERTY.type;
    &MYFILE.WriteLine(&OutTEXT);
End-For;
&MYFILE.Close();
```


Example of Accessing the Repository by Using Visual Basic

This example gets information for the class ABS_HIST from the Namespace component interface.

```
Private Sub Command1_Click()
    *****
    '* TacDemo: Example Repository Usage from Visual Basic
    '*
    '* Copyright (c) 1999 PeopleSoft, Inc. All rights reserved
    *****

    ' Declare variables
    Dim oSession As New PeopleSoft_PeopleSoft.Session
    Dim oPSMessages As PSMessageCollection
    Dim oPSMessage As PSMessage
    ' Establish a PeopleSoft Session
    nStatus = oSession.Connect(1, "/PSOFT0070698:9001", "PTDMO", "PTDMO", 0)
    ' Enable error-handler
    On Error GoTo ErrorHandler
    ' Get a Component Interface "shell"
    Dim oNamespaces As NamespaceCollection
    Dim oNamespace As Namespace
    Dim oClasses As ClassInfoCollection
    Dim oClass As ClassInfo
    Dim oMethods As MethodInfoCollection
    Dim oMethod As MethodInfo
    Dim oArguments As PropertyInfoCollection
    Dim oArgument As PropertyInfo
    Dim oProperties As PropertyInfoCollection
    Dim oProperty As PropertyInfo
    Set oNamespaces = oSession.Repository.namespaces
    Set oNamespace = oNamespaces.ItemByName("ComponentInterface")
    Dim outText As String
    outText = "Namespace = " & oNamespace.Name & vbNewLine
    Set oClasses = oNamespace.classes
    Set oClass = oClasses.ItemByName("ABS_HIST")
    outText = outText & "    Class: " & oClass.Name & vbNewLine
    outText = outText & "        Methods" & vbNewLine
    Set oMethods = oClass.methods
    For k = 0 To oMethods.Count - 1
        Set oMethod = oMethods.Item(k)          outText = outText & "
"
    & oMethod.Name & ": " & oMethod.Type & vbNewLine
        Set oArguments = oMethod.arguments
        For m = 0 To oArguments.Count - 1
            Set oArgument = oArguments.Item(m)
            outText = outText & "                "
    & oArgument.Name & ": " & oArgument.Type & vbNewLine
        Next
    Next
    outText = outText & "        Properties" & vbNewLine
    Set oProperties = oClass.properties
    For k = 0 To oProperties.Count - 1
```

```

        Set oProperty = oProperties.Item(k)
        outText = outText & "          " & oProperty.Name & ":  "
    & oProperty.Type & vbNewLine
    Next
    txtResults = outText
    ' Leave before we encounter the error handler
Exit Sub
ErrorHandler:
    If Err.Number = 1001 Then                ' PeopleSoft Error
        Set oPSMessages = oSession.PSMessages
        If oPSMessages.Count > 0 Then
            For i = 1 To oPSMessages.Count
                Set oPSMessage = oPSMessages.Item(i)
                MsgBox (oPSMessage.Text)
            Next i
            oPSMessages.DeleteAll
        Else
            MsgBox ("PS Api Error. No additional information
available from Session log")
        End If
    Else                                     ' VB Error
        MsgBox ("VB Error: " & Err.Description)
    End If
End Sub

```

Repository Properties

This section discusses the Repository properties in alphabetical order.

Bindings property: repository class

Description

The Bindings property returns a reference to a Bindings collection.

This property is read-only.

Namespaces property: repository class

Description

The Namespaces property returns a reference to a Namespaces collection.

This property is read-only.

Bindings Collection Properties

This section discusses the Bindings collection properties in alphabetical order.

Count property: Bindings collection

Description

This property returns the number of Bindings Properties objects in the Bindings collection object.

Note

All repository counts begin at zero, not one.

This property is read-only.

Example

```
&COUNT = &BINDINGS.Count;
```

Related Topics

- [Bindings Properties](#)
This section discusses the Bindings properties in alphabetical order.

Bindings Collection Methods

This section discusses the Bindings collection methods in alphabetical order.

Item method: Bindings collection

Syntax

`Item(number)`

Description

The Item method returns a Bindings object that exists at the number position in the Bindings collection executing the method

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the Bindings object that you want returned.

Returns

A reference to a Bindings object or NULL.

Example

```
For &N = 0 to &BINDINGS.Count - 1
    &BINDING = &BINDINGS.Item(&N);
    /* do processing */
End-For;
```

Bindings Properties

This section discusses the Bindings properties in alphabetical order.

Name property: Binding class

Description

This property returns the name of the object as a string.

This property is read-only.

Bindings Methods

This section discusses the Bindings methods in alphabetical order.

Generate method: Binding class

Syntax

```
Generate()
```

Description

This method is a reserved internal function and shouldn't be used at this time.

Namespaces Collection Properties

This section discusses the Namespaces collection properties in alphabetical order.

Count property: NameSpace collection

Description

This property returns the number of Namespaces Properties objects in the Namespaces collection object.

Note

All repository counts begin at zero, not one.

This property is read-only.

Example

```
&COUNT = &NameC.Count;
```

Related Topics

- [Namespaces Properties](#)
This section discusses the Namespaces properties in alphabetical order.

Namespaces Collection Methods

This section discusses the Namespaces collection methods in alphabetical order.

Item method: Namespace collection

Syntax

```
Item(number)
```

Description

The Item method returns a Namespaces object that exists at the *number* position in the Namespaces collection executing the method.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the Namespaces object that you want returned.

Returns

A reference to a Namespaces object or NULL.

Example

```
For &N = 0 to &NAMESPACES.Count - 1  
    &NAMESPACE = &NAMESPACES.Item(&N);  
    /* do processing */  
End-For;
```

ItemByName method: Namespace collection

Syntax

```
ItemByName(name)
```

Description

The ItemByName method returns the item specified by *name*. *Name* is not case-sensitive.

Parameters

Parameter	Description
<i>name</i>	Specify the name of the Namespaces object that you want returned. This parameter takes a string value.

Returns

A reference to a Namespaces object or NULL.

Example

```
&NAMESPACE = &NAMESPACES.ItemByName("BusinessComponent");
```

Namespaces Properties

This section discusses the Namespaces properties in alphabetical order.

Classes property: Namespace class

Description

This property returns a reference to a ClassInfo collection object.

This property is read-only.

Example

```
&CLASSC = &NAME.Classes;
```

Related Topics

- [ClassInfo Collection Properties](#)
This section discusses the ClassInfo collection properties in alphabetical order.

Name property: Namespace class

Description

This property returns the name of the object as a string.

This property is read-only.

Namespaces Methods

This section discusses the Namespaces methods in alphabetical order.

CreateObject method: Namespace class

Syntax

CreateObject(*classname*)

Description

This method is a reserved internal function and shouldn't be used at this time.

ClassInfo Collection Properties

This section discusses the ClassInfo collection properties in alphabetical order.

Count property: ClassInfo collection

Description

This property returns the number of ClassInfo Properties objects in the ClassInfo collection object.

Note

All repository counts begin at zero, not one.

This property is read-only.

Example

```
&COUNT = &InfoC.Count;
```

Related Topics

- [ClassInfo Properties](#)
This section discusses the ClassInfo properties in alphabetical order.

ClassInfo Collection Methods

This section discusses the ClassInfo collection methods in alphabetical order.

Item method: ClassInfo collection

Syntax

Item(*number*)

Description

The Item method returns a ClassInfo object that exists at the *number* position in the ClassInfo collection executing the method.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the ClassInfo object that you want returned.

Returns

A reference to a ClassInfo object or NULL.

Example

```
For &N = 0 to &CLASSES.Count - 1
    &CLASS = &CLASSES.Item(&N);
    /* do processing */
End-For;
```

ItemByName method: ClassInfo collection

Syntax

ItemByName(*name*)

Description

The ItemByName method returns the item specified by *name*. *Name* is not case-sensitive.

Parameters

Parameter	Description
<i>name</i>	Specify the name of the ClassInfo object that you want returned. This parameter takes a string value.

Returns

A reference to a ClassInfo object or NULL.

Example

```
&CLASS = &CLASSES.ItemByName("ABS_HIST");
```

ClassInfo Properties

This section discusses the ClassInfo properties in alphabetical order.

Documentation property: ClassInfo class

Description

This property doesn't actually return all the documentation for the class, just a brief description of the class as a string.

This property is read-only.

Methods property: ClassInfo class

Description

This property returns a reference to a MethodInfo collection object.

This property is read-only.

Related Topics

- [MethodInfo Collection Methods](#)
This section discusses the MethodInfo collection methods in alphabetical order.

Name property: ClassInfo class

Description

This property returns the name of the object as a string.

This property is read-only.

Properties property: ClassInfo class

Description

This property returns a reference to a PropertyInfo collection object.

This property is read-only.

Related Topics

- [PropertyInfo Collection Methods](#)
This section discusses the PropertyInfo collection methods in alphabetical order.

MethodInfo Collection Properties

This section discusses the MethodInfo collection properties in alphabetical order.

Count property: MethodInfo collection

Description

This property returns the number of MethodInfo Properties objects in the MethodInfo collection object.

Note

All repository counts begin at zero, not one.

This property is read-only.

Example

```
&COUNT = &MethC.Count;
```

Related Topics

- [MethodInfo Properties](#)
This section discusses the MethodInfo properties in alphabetical order.

MethodInfo Collection Methods

This section discusses the MethodInfo collection methods in alphabetical order.

Item method: MethodInfo collection

Syntax

```
Item(number)
```

Description

The Item method returns a MethodInfo object that exists at the *number* position in the MethodInfo collection executing the method.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the MethodInfo object that you want returned.

Returns

A reference to a MethodInfo object or NULL.

Example

```
For &K = 0 To &METHODS.Count - 1
    &METHOD = &METHODS.item(&K);
    &OutTEXT = "          " | &METHOD.name | ": " | &METHOD.Type;
    &MYFILE.WriteLine(&OutTEXT);
End-For;
```

ItemByName method: MethodInfo collection

Syntax

ItemByName(*name*)

Description

The ItemByName method returns the item specified by *name*. *Name* is not case-sensitive.

Parameters

Parameter	Description
<i>name</i>	Specify the name of the MethodInfo object that you want returned. This parameter takes a string value.

Returns

A reference to a MethodInfo object or NULL.

Example

```
&METHOD = &METHODS.ItemByName("Save");
```

MethodInfo Properties

This section discusses the MethodInfo properties in alphabetical order.

Arguments property: MethodInfo class

Description

This property returns a reference to a PropertyInfo collection object.

This property is read-only.

Related Topics

- [PropertyInfo Collection Methods](#)
This section discusses the PropertyInfo collection methods in alphabetical order.

Documentation property: MethodInfo class

Description

This property doesn't actually return all the documentation for the class, just a brief description of the class, as a string.

This property is read-only.

Name property: MethodInfo class

Description

This property returns the name of the object as a string.

This property is read-only.

Type property: MethodInfo class

Description

This property returns the type of the method. Values include:

- Bool (Boolean).
- Number.
- Float.
- String.
- Variant.
- Blob (binary large object).
- Any API class name.

This property is read-only.

PropertyInfo Collection Properties

This section discusses the PropertyInfo collection properties in alphabetical order.

Count property: PropertyInfo collection

Description

This property returns the number of PropertyInfo Properties objects in the PropertyInfo collection object.

Note

All repository counts begin at zero, not one.

This property is read-only.

Example

```
&COUNT = &PropC.Count;
```

Related Topics

- [PropertyInfo Properties](#)
This section discusses the PropertyInfo properties in alphabetical order.

PropertyInfo Collection Methods

This section discusses the PropertyInfo collection methods in alphabetical order.

Item method: PropertyInfo collection

Syntax

`Item(number)`

Description

The Item method returns a PropertyInfo object that exists at the *number* position in the PropertyInfo collection executing the method.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the PropertyInfo object that you want returned.

Returns

A reference to a PropertyInfo object or NULL.

Example

```
For &K = 0 To &PROPERTIES.Count - 1
    &PROPERTY = &PROPERTIES.item(&K);
    &OutTEXT = "          " | &PROPERTY.name | ": " | &PROPERTY.Type;
    &MYFILE.WriteLine(&OutTEXT);
End-For;
```

ItemByName method: PropertyInfo collection

Syntax

`ItemByName(name)`

Description

The ItemByName method returns the item specified by *name*. *Name* is not case-sensitive.

Parameters

Parameter	Description
<i>name</i>	Specify the name of the PropertyInfo object that you want returned. This parameter takes a string value.

Returns

A reference to a PropertyInfo object or NULL.

Example

```
&PROPERTY = &PROPERTIES.ItemByName(&ldquo;GetHistoryItems&rdquo;);
```

PropertyInfo Properties

This section discusses the PropertyInfo properties in alphabetical order.

Documentation property: PropertyInfo class

Description

This property doesn't actually return all the documentation for the class, just a brief description of the class, as a string. This property is read-only.

Name property: PropertyInfo class

Description

This property returns the name of the object as a string.

This property is read-only.

Type property: PropertyInfo class

Description

This property returns the data type. Values are:

- Bool (Boolean).
- Number.
- Float.
- String.
- Variant.
- Blob (binary large object).
- Any API class name.

This property is read-only.

Usage property: PropertyInfo class

Description

This property returns a number that describes in which direction the specified property (or argument) can be passed. The following table describes the valid values.

Value	Description
0	Can be passed into PeopleSoft API.
1	Can be passed out of PeopleSoft API.
2	Can be passed either into or out of PeopleSoft API.

This property is read-only.

11

Array Class

Understanding Arrays

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

Creating Arrays

Arrays are declared by using the Array type name, optionally followed by "of" and the type of the elements. If the element type is omitted, it is set by default to ANY.

```
Local Array of Number &MYARRAY;  
Local Array &ARRAYANY;
```

Arrays can be composed of any valid PeopleCode data type, such as string, record, number, date, and so on.

PeopleSoft recommends you declare every object you use in PeopleCode. This provides some syntax checking when you save PeopleCode. It's better to find out that you misspelled the name of a method or property at design time, rather than at runtime!

Arrays can be declared as Local, Global, or Component, just like any other PeopleTools object.

Arrays can be created with one or more dimensions. An array with more than one dimension is called an array of arrays. The *dimension* of an array is the number of Array type names in the declaration. This is also called the *depth* of an array. The maximum depth of a PeopleCode array is 15 dimensions.

In the following example, &MYARRAY has three dimensions, and &MYA2 has two dimensions.

```
Local Array of Array of Array of Number &MYARRAY;  
Local Array of Array &MYA2;
```

An array must always have a consistent dimension. This means that in a one-dimensional array *none* of the elements can be an array, in a two-dimensional array *all* of the elements must be one-dimensional arrays, and so on.

After you declare an array, use one of the built-in array functions to instantiate it and return an object reference to it. For example, the following creates an array containing one element of type &TEMP, whatever data type &TEMP may be.

```
&MYARRAY = CreateArray(&TEMP);
```


Or you can use the `CreateArrayRept` function to instantiate an array. The `Rept` stands for *repeat*. `CreateArrayRept` creates an array that contains the number of copies you specify of a particular value. The following code creates an array with three copies of the string `&MYSTRING`. This does *not* create a three-dimensional array, but rather creates an array that's already populated with three elements of data (`Len = 3`), each of which contain the same string (`&MYSTRING`).

```
&MYARRAY = CreateArrayRept(&MYSTRING, 3);
```

An array *object* can be assigned to an array *variable*. Array objects can be passed from and returned to any kind of `PeopleCode` function:

```
ANewFunc (&myarray);  
MyFunc (&myarray);  
&MyArray = YourFunc("something");
```

For example, the `ReturnToServer` function returns an array of nodes to which a message can be published.

Elements in an array are specified by providing a bracketed subscript after the array object reference:

```
&MyArray[1] = 123;  
&temp = &memory[1][2][3];  
&temp = &memory[1, 2, 3]; /* Same as preceding line. */  
MyFunc(&MyArray[7]);  
MyFunc(10)[15] = "a string";
```

To access data in a two-dimensional array, you must specify both indexes. The following accesses the second item in the first subarray:

```
&VALUE = &DOUBLE[1][2];
```

You receive an error if you use a zero or negative index in an array. Accessing an array element whose index is larger than the last array element is also an error, but storing to such an index extends the array. Any intervening elements between the former last element and the new last element are assigned a value based on the element type of the array. This is the same value as an unassigned variable of that type.

An array is an object, which means that assignments to an array are the same as for any other object. An array variable can be assigned the distinguished value `NULL`, which indicates the absence of any array value.

Array variables are supported for all scopes. This means that you can have local, global, and Component array variables.

Related Topics

- PeopleCode Language Reference: `ReturnToServer` function
- PeopleCode Developer's Guide: Assigning Objects

Populating an Array

There are several ways to populate an array. The example code following each of these methods creates the exact same array, with the same elements:

- Use `CreateArray` when you initially create the array:

```
Local Array of Number &MyArray;  
  
&MyArray = CreateArray(100, 200, 300);
```

- Assign values to the elements of the array:

```
Local Array of Any &MYARRAY;  
  
&MYARRAY = CreateArray();  
&MYARRAY[1] = 100;  
&MYARRAY[2] = 200;  
&MYARRAY[3] = 300;
```

Note

Using `CreateArray` without any parameters creates an array of Any.

- Use the `Push` method to add items to the end of the array:

```
Local Array of Number &MYARRAY;  
Local Number &MYNUM;  
  
&MYARRAY = CreateArrayRept(&MYNUM, 0);  
/* this creates an empty array of number */  
&MYARRAY.Push(100);  
&MYARRAY.Push(200);  
&MYARRAY.Push(300);
```

- Use the `Unshift` method to add items to the beginning of the array:

```
Local Array of Number &MYARRAY;  
Local Number &MYNUM;  
  
&MYARRAY = CreateArrayRept(&MYNUM, 0);  
/* this creates an empty array of number */  
&MYARRAY.Unshift(300);  
&MYARRAY.Unshift(200);  
&MYARRAY.Unshift(100);
```

You can also use `CreateArrayRept` (repeat) when you initially create the array. The following example creates an array with three elements: all three elements have the same data, that is, 100:

```
Local Array of Number &MYARRAY;  
  
&MYARRAY = CreateArrayRept(100, 3);
```

Removing Items From an Array

You can remove elements from either the start or the end of the array:

- Use the `POP` method to select and remove an element from the end of an array

```
Local Array of Number &MYARRAY;  
  
&MYARRAY = CreateArray();  
&MYARRAY[1] = 100;  
&MYARRAY[2] = 200;  
&MYARRAY[3] = 300;  
  
&ANSWER = &MYARRAY.Pop();
```

&ANSWER will equal 300.

- Use the `SHIFT` method to select and remove an element from the beginning of an array

```
Local Array of Number &MYARRAY;  
  
&MYARRAY = CreateArray();  
&MYARRAY[1] = 100;  
&MYARRAY[2] = 200;  
&MYARRAY[3] = 300;  
  
&ANSWER = &MYARRAY.Shift();
```

&ANSWER equals 100.

Creating Empty Arrays

If you create an array using `CreateArray` of any data type other than `ANY`, the new array is *not* empty: it contains one item. If you need to create a completely empty array that contains 0 elements, use one of the following:

```
Local Array of Number &AN;  
Local Array of String &AS;  
Local Array of Record &AR;  
Local Array of Array of Number &AAN;  
Local Record &REC;  
  
&AN = CreateArrayRept(0,0); /* creates an empty array of number */  
&AS = CreateArrayRept("", 0); /* creates an empty array of string */  
&AR = CreateArrayRept(&REC, 0); /*create empty array of records */
```

```
&AAN = CreateArrayRept(&AN, 0); /*creates empty array of array of number */
&BOTH = CreateArray(CreateArrayRept("", 0), CreateArrayRept("", 0)); /*
creates an⇒
empty array of array of string */
```

Creating and Populating Multi-Dimensional Arrays

You can create arrays with more than one dimension. Each element in a multi-dimensional array is itself an array. For example, a two-dimensional array is really an array of arrays. Each subarray has to be created and populated as an array.

Each subarray in a multi-dimensional array must be of the same type. For example, you can't create a two dimensional array that has one subarray of type string and a second subarray of type number.

The following example creates an array of array of string, then reads two files, one into each "column" of the array. The CreateArrayRept function call creates an empty array of string (that is, the Len property is 0) but with two dimensions (that is, with two subarrays, Dimension is 2). The first Push method adds elements into the first subarray, so at the end of that WHILE loop in the example, &BOTH has Len larger than 0. The other Push methods add elements to the second subarray.

```
Local array of array of string &BOTH;
Local File &MYFILE;
Local string &HOLDER;

/* Create empty &BOTH array */
&BOTH = CreateArrayRept(CreateArrayRept("", 0), 0);

/* Read first file into first column */

&MYFILE = GetFile("names.txt", "R", "UTF8");
While &MYFILE.ReadLine(&HOLDER);
    &BOTH.Push(&HOLDER);
End-While;

/* read second file into second column */

&MYFILE = GetFile("numbers.txt", "R", "UTF8");
&LINENO = 1;
While &MYFILE.ReadLine(&HOLDER);
    If &LINENO > &BOTH.Len Then
        /* more number lines than names, use a null name */
        &BOTH.Push(CreateArray("", &HOLDER));
    Else
        &BOTH[&LINENO].Push(&HOLDER);
    End-If;
    &LINENO = &LINENO + 1;
End-While;

/* if more names than numbers, add null numbers */
for &LINENO = &LINENO to &BOTH.Len
    &BOTH[&LINENO].Push("");
End-For;
```

This example illustrates the fields and controls on the &BOTH array expanded in PeopleCode debugger at program end. You can find definitions for the fields and controls later on this page.

Local Name	Local Value
▢ &BOTH	Array
└ Dimension	2
└ Len	3
▢ [1]	
└ Dimension	1
└ Len	2
└ [1]	Pete
└ [2]	100
▢ [2]	
└ Dimension	1
└ Len	2
└ [1]	Sue
└ [2]	200
▢ [3]	
└ Dimension	1
└ Len	2
└ [1]	Laszlo
└ [2]	400
▢ &MYFILE	File
&HOLDER	400
&LINENO	4

The following code reads from a two-dimensional array and writes the data from the each subarray into a separate file.

```
Local File &MYFILE1, &MYFILE2;
Local string &STRING1, &STRING2;
Local array of array of string &BOTH;

/* code to load data into array would be here */

/* open files to be written to */

&MYFILE1 = GetFile("names.txt", "A", "UTF8");
&MYFILE2 = GetFile("numbers.txt", "A", "UTF8");

/* loop through array and write to files */

For &I = 1 To &BOTH.Len
    &J = 1;
    &STRING1 = &BOTH[&I][&J];
    &MYFILE1.writeline(&STRING1);
    &J = &J + 1;
    &STRING2 = &BOTH[&I][&J];
    &MYFILE2.writeline(&STRING2);
End-For;

&MYFILE1.Close();
&MYFILE2.Close();
```

The following example populates a multi-dimensional string array using SQL. This could be used for reading small tables.

```
Component array of array of string &ArrRunStatus;

&ArrRunStatus = CreateArrayRept(CreateArrayRept("", 0), 0);
&ArrRunStatusDescr = CreateArrayRept("", 0);

&SQL = CreateSQL("SELECT FIELDVALUE, XLATSHORTNAME FROM XLATTABLE WHERE
FIELDNAME = 'RUNSTATUS'");

&LineNo = 1;
While &SQL.Fetch(&FieldValue, &XlatShortName)
    &ArrRunStatus.Push(&FieldValue);
    &ArrRunStatus[&LineNo].Push(&XlatShortName);
    &LineNo = &LineNo + 1;
End-While;
```

To search for a particular element in this array, use the following:

```
&iIndex = &ArrRunStatus.Find(&RunStatusToGet);

&RunStatusDescr = &ArrRunStatus[&iIndex][2];
```

The following example shows how to create a two-dimension array using `CreateArrayRept` and `Push`. In addition, it shows how to randomly assigns values to the cells in a two-dimension array.

```
Local array of array of string &ValueArray;

&Dim1 = 10;
&Dim2 = 5;
&ValueArray = CreateArrayRept(CreateArrayRept("", 0), 0);
For &I = 1 To &Dim1
    &ValueArray.Push(CreateArrayRept("", &Dim2));
End-For;

&ValueArray[1][1] = "V11";
&ValueArray[2][1] = "V21";

WinMessage("&ValueArray[1][1] = " | &ValueArray[1][1] | " " | "&ValueArray[2]
[1] =>
" | &ValueArray[2][1], 0);
```

Using Flattening and Promotion

Several of the functions and methods that support arrays in PeopleCode use flattening and promotion to convert their operands to the correct dimension for the array.

Flattening converts an array into its elements. For example, the `CreateArray` built-in function constructs an array from its parameters. If it is constructing a one-dimensional array and is given an array as a parameter, then it flattens that array into its elements and adds each of

them to the array that it is building, rather than adding a reference to the array (which would be a dimension error) or reporting an error.

Likewise, for functions that operate on multiple-dimension arrays, if they are given a non-array parameter, they use *promotion* to convert it into an array of suitable dimension. For example, the Push method appends elements onto the end of an array. If it is operating with a two-dimensional array of Array of Number, and is given a numeric argument, it will convert the argument into a one-dimensional array of Number with the given number as its only element, and then append that to the two-dimensional array.

An array value can only be assigned to an array variable if the value and variable have both the same dimension and base type. This means you cannot assign an Array of Any to an Array of Number variable or vice-versa. You can, however, assign an Array of Number to an Any variable, as long as you do not break the rule that the base element of an array cannot be an array reference value.

Declaring Array Objects

Arrays are declared by using the Array type name, optionally followed by "of" and the type of the elements. If the element type is omitted, it is set by default to ANY.

```
Local Array of Number &MYARRAY;  
Local Array &ARRAYANY;
```

Arrays can be composed of any valid PeopleCode data type, such as string, record, number, date, and so on.

Understanding the Scope of an Array Object

An array object can only be instantiated from PeopleCode. This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

Array Class Built-in Functions

PeopleCode Language Reference: CreateArray function

PeopleCode Language Reference: CreateArrayAny function

PeopleCode Language Reference: CreateArrayRept function

PeopleCode Language Reference: Split function

Array Class Methods

In this section, we discuss the array class methods.

Clone method: Array class

Syntax

```
Clone()
```

Description

The Clone method returns a reference to a new array, which is a copy of the given array. It copies all levels of the array, meaning, if the array contains elements which are themselves arrays (actually references to arrays), then the copy contains references to copies of the subarrays. Furthermore, if the array contains elements that are references to the same subarray, then the copy contains references to *different* subarrays (which of course have the same value).

Parameters

None. The array object that the clone method is executed against is the array to be cloned. Assigning the result of this method assigns a reference to the new array.

Returns

An array object copied from the original.

Example

In the following example, &AAN2 contains the three elements like &AAN, but they are distinct arrays. The last line changes only &AAN2[1][1], *not* &AAN[1][1].

```
Local Array of Array of String &AAN, &AAN2;
```

```
&AAN = CreateArray(CreateArray("A", "B"), CreateArray("C", "D"), "E");  
&AAN2 = &AAN.Clone();  
&AAN2[1][1] = "Z";
```

After the following example, &AAN contains three elements: two references to the subarray that was &AAN[2] (with elements C and D), and a reference to a subarray with element E.

```
&AAN[1] = &AAN[2];
```

After the following example, &AAN2 contains three elements: references to two different subarrays both with elements C and D, and a subarray with element E.

```
&AAN2 = &AAN.Clone();
```

Related Topics

- [Subarray method: Array class](#)

Find method: Array class

Syntax

```
Find(value)
```

Description

For a one-dimensional array, the Find method returns the lowest index of an element in the array that is equal to the given value. If the value is not found in the array, it returns zero.

For a two-dimensional array, the Find method returns the lowest index of a subarray which has its first element equal to the given value. If such a subarray is not found in the array, it returns zero.

Note

This method works with arrays that have only one or two dimensions. You receive a runtime error if you try to use this method with an array that has more than two dimensions.

Parameters

Parameter	Description
<i>value</i>	The string or subarray to search for.

Returns

An index of an element or zero.

Example

Given an array &AS containing (A, B, C, D, E), the following code sets &IND to the index of D, that is, &IND has the value 4:

```
Local array of string &AS;  
  
&AS = CreateArrayRept("", 0);  
&AS.Push("A");  
&AS.Push("B");  
&AS.Push("C");  
&AS.Push("D");  
&AS.Push("E");  
&IND = &AS.Find("D");
```

Given an array of array of string &AABYNAME containing (("John", "July"), ("Jane", "June"), ("Norm", "November")), the following code sets &IND to the index of the subarray starting with "Jane", that is, &IND has the value 2:

```
&NAME = "Jane";  
&IND = &AABYNAME.Find(&NAME);
```

Related Topics

- [Replace method: Array class](#)
- [Substitute method: Array class](#)

Get method: Array class

Syntax

```
Get(index)
```

Description

Use the Get method to return the *index* element of an array. This method is used with the Java PeopleCode functions, instead of using subscripts (which aren't available in Java.)

Using this method is the same as using a subscript to return an item of an array. In the following example, the two lines of code are identical:

```
&Value = &MyArray[8];
```

```
&value = &MyArray.Get(8);
```

Parameters

Parameter	Description
<i>index</i>	The array element to be accessed.

Returns

An element in an array.

Related Topics

- [Set method: Array class](#)
- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

Join method: Array class

Syntax

```
Join([separator [, arraystart, arrayend [, stringsizehint]]])
```

Description

The Join method *converts* the array that is executing the method into a string by converting each element into a string and *joining* these strings together, separated by *separator*.

Note

Join does *not* join two arrays together.

Each array or subarray to be joined is preceded by the string given by *arraystart* and followed by the string given by *arrayend*. If the given array is multi-dimensional, then (logically) each subarray is first joined, then the resulting strings are joined together.

Parameters

Parameter	Description
<i>separator</i>	Specifies what the elements in the resulting string should be separated with in the resulting string. <i>Separator</i> is set by default to a comma (",").
<i>arraystart</i>	Specifies what each array or subarray to be joined should be preceded with in the resulting string. <i>arraystart</i> is set by default to a left parenthesis ("(").
<i>arrayend</i>	Specifies what each array or subarray to be joined should be followed by in the resulting string. <i>arrayend</i> is set by default to a right parenthesis (")").
<i>stringsizehint</i>	Specify a hint to the Join method about the resulting size of the string. This can improve performance if your application is concatenating a large number of string. See the Example section below.

Returns

A string containing the converted elements of the array.

Example

The following example:

```
Local array of array of number &AAN;
```

```
&AAN = CreateArray(CreateArray(1, 2), CreateArray(3, 4), 5);  
&STR = &AAN.Join(", ");
```

produces in &STR the string:

```
((1, 2), (3, 4), 5)
```

The following example makes use of the *stringsizehint* parameter. The following application class passes the resulting string size hint in the Value property.

```
class StringBuffer  
    method StringBuffer(&InitialValue As string, &MaxSize As integer);  
    method Append(&New As string);
```

```

        method Reset();
        property string Value get set;
        property integer Length readonly;
    private
        instance array of string &Pieces;
        instance integer &MaxLength;
    end-class;

    method StringBuffer
        /+ &InitialValue as String, +/
        /+ &MaxSize as Integer +/
        &Pieces = CreateArray(&InitialValue);
        &MaxLength = &MaxSize;
        &Length = 0;
    end-method;

    method Reset
        &Pieces = CreateArrayRept("", 0);
        &Length = 0;
    end-method;

    method Append
        /+ &New as String +/
        Local integer &TempLength = &Length + Len(&New);
        If &Length > &MaxLength Then
            throw CreateException(0, 0, "Maximum size of StringBuffer exceeded(" |
&Max⇒
Length | ")");
        End-If;
        &Length = &TempLength;
        &Pieces.Push(&New);
    end-method;

    get Value
        /+ Returns String +/
        Local string &Temp = &Pieces.Join("", "", "", &Length);
        /* collapse array now */
        &Pieces = CreateArrayRept("", 0);
        &Pieces.Push(&Temp); /* start out with this combo string */
        Return &Temp;
    end-get;

    set Value
        /+ &NewValue as String +/
        /* Ditch our current value */
        %This.Reset();
        &Pieces.Push(&NewValue);
    end-set;

```

The following code concatenates strings.

```

While &file.ReadLine(&line)
    &S.Append(&line);
    &S.Append(&separator);

```

Related Topics

- PeopleCode Language Reference: Split function

Next method: Array class

Syntax

Next(*&index*)

Description

The Next method increments the given index variable. It returns true if and only if the resulting index variable refers to an existing element of the array. Next is typically used in the condition of a WHILE clause to process a series of array elements up to the end of the array.

&index must be a variable of type integer, or of type Any initialized to an integer, as Next attempts to update it.

If you want to start from the first element of the array, start Next with an index variable with the value zero. The first thing Next does is to increment the value by one.

Parameters

Parameter	Description
<i>&index</i>	The array element where processing should start. <i>&index</i> must be a variable of type integer, or of type Any initialized to an integer, as Next attempts to update it.

Returns

True if the resulting index refers to an existing element of the array, False otherwise.

Example

Next can be used in a While loop to iterate through an array in the following manner:

```
&INDEX = 0;
While &A.Next(&INDEX)
    /* Process &A[&INDEX] */
End-While;
```

In the following code example, &BOTH is a two-dimensional array. This example writes the data from each subarray in &BOTH into a different file.

```
&I = 0;
While &BOTH.Next(&I)
    &J = 1;
    &STRING1 = &BOTH[&I][&J];
    &MYFILE1.writeline(&STRING1);
    &J = &J + 1;
    &STRING2 = &BOTH[&I][&J];
    &MYFILE2.writeline(&STRING2);
End-While;
```

Related Topics

- [Len property: Array class](#)

Pop method: Array class

Syntax

Pop()

Description

The Pop method removes the last element from the array and returns its value.

Parameters

None.

Returns

The value of the last element of the array. If the last element is a subarray, the subarray is returned.

Example

The Pop method can be used with the Push method to use an array as a stack. To put values on the end of the array, use Push. To take the values back off the end of the array, use Pop.

Suppose we have a two-dimensional array &SUBPARTS which gives the subparts of each part of some assemblies. Each row (subarray) of &SUBPARTS starts with the name of the part, and then has the names of the subparts. Assuming there are no "loops" in this data, the following code puts all the subparts, subsubparts, and so on, of the part given by &PNAME into the array &ALLSUBPARTS, in "depth first order" (that is, subpart1, subparts of subpart1, ..., subpart2, subparts of subpart2, ...). We stack the indexes into &SUBPARTS when we want to go down to the subsubparts of the current subpart.

```
Local array of array of string &SUBPARTS;
Local array of string &ALLSUBPARTS;
Local array of array of number &STACK;
Local array of number &CUR;
Local string &SUBNAME;

/* Set the ALLSUBPARTS array to an empty array of string. */

&ALLSUBPARTS = CreateArrayRept("dummy", 0);

/* Start with the part name. */

&STACK = CreateArray(CreateArray(&SUBPARTS.Find(&PNAME), 2));
While &STACK.Len > 0
    &CUR = &STACK.Pop();
    If &CUR[1] <> 0 And
        &CUR[2] <= &SUBPARTS[&CUR[1]].Len Then
        /* There is a subpart here. Add it. */
        &SUBNAME = &SUBPARTS[&CUR[1], &CUR[2]];
        &ALLSUBPARTS.Push(&SUBNAME);
        /* Tour its fellow subparts later. */
```

```
&STACK.Push(CreateArray(&CUR[1], &CUR[2] + 1));  
/* Now tour its subsubparts. */  
&STACK.Push(CreateArray(&SUBPARTS.Find(&SUBNAME), 2));  
End-If;  
End-While;
```

Related Topics

- [Push method: Array class](#)
- [Replace method: Array class](#)
- [Shift method: Array class](#)
- [Unshift method: Array class](#)

Push method: Array class

Syntax

`Push(paramlist)`

Where *paramlist* is an arbitrary-length list of values in the form:

value1 [, *value2*] ...

Description

The Push method adds the values in *paramlist* onto the end of the array executing the method. If a value is not the correct dimension, it is flattened or promoted to the correct dimension first, then the resulting values are added to the end of the array.

Parameters

Parameter	Description
<i>paramlist</i>	An arbitrary-length list of values, separated by commas.

Returns

None.

Example

The following example loads an array with data from a database table.

```
Local array of record &MYARRAY;  
Local SQL &SQL;  
  
&I = 1;  
&SQL = CreateSQL("Select(:1) from %Table(:1) where EMPLID like  
&lsquo;8%&rsquo;", =>  
    &REC);  
While &SQL.Fetch(&REC);  
    &MYARRAY.Push(CreateRecord(RECORD.PERSONAL_DATA));
```

```
&I = &I + 1;  
&REC.CopyFieldsTo(&MYARRAY[&I]);  
End-While;
```

Considerations Using Arrays With Object References

This method only adds an element to the end of an array. It does not clone or otherwise deep-copy the parameters. For example, if you are adding a reference to an object, Push just adds a reference to the object at the end of the array. This is similar to an assignment. It is *not* making a copy of the object. The following code snippet only puts a reference to the same record onto the end of the array.

```
While &SQL.Fetch(&Rec);  
&MYARRAY.Push(&Rec);  
...  
End-While;
```

Even though the array is growing, all the elements point to the same record. You have only as many standalone record objects as you create. The following code snippet creates new standalone records, so each element in the array points to a new object:

```
local Record &FetchedRec = CreateRecord(Record.PERSONAL_DATA);  
  
While &SQL.Fetch(&FetchedRec)  
    &MYARRAY.Push(&FetchedRec);  
    &FetchedRec = CreateRecord(Record.PERSONAL_DATA);  
End-While;
```

Related Topics

- [Pop method: Array class](#)
- [Replace method: Array class](#)
- [Shift method: Array class](#)
- [Unshift method: Array class](#)
- [Using Flattening and Promotion](#)
Several of the functions and methods that support arrays in PeopleCode use flattening and promotion to convert their operands to the correct dimension for the array.
- PeopleCode Developer's Guide: Assigning Objects

Replace method: Array class

Syntax

```
Replace(start, length[, paramlist])
```

Where *paramlist* is an arbitrary-length list of values in the form:

```
value1 [, value2] ...
```


Description

Replace replaces the *length* elements starting at *start* with the given values, if any. If *length* is zero, the insertion takes place *before* the element indicated by *start*. Otherwise, the replacement starts with *start* and continues up to and including *length*, replacing the existing values with *paramlist*.

If a negative number is used for *start*, it indicates the starting position relative to the last element in the array, such that -1 indicates the position just *after* the end of the array. To insert at the end of the array (equivalent to the Push method), use a *start* of -1 and a *length* of 0.

If a negative number is used for *length*, it indicates a length measuring downward to lower indexes. Both flattening and promotion can be applied to change the dimension of the supplied parameters to match the elements of the given array.

Similar to how the built-in function Replace is used to update a string, the Replace method is a general way to update an array, and can cause the array to grow or shrink.

See [Using Flattening and Promotion](#).

Parameters

Parameter	Description
<i>start</i>	Specifies where to start replacing the given elements in the array. If a negative number is used for <i>start</i> , it indicates the starting position relative to the last element in the array.
<i>length</i>	Specifies the number of elements in the array to be replaced.
<i>paramlist</i>	Specifies values to be used to replace existing values in the array. This parameter is optional.

Returns

None.

Example

For example, given the following array:

```
Local array of string &AS;
```

```
&AS = CreateArray("AA", "BB", "CC");
```

After executing the next code, the array &AN will contain four elements, ZZ, YY, BB, CC:

```
&AS.Replace(1, 1, "ZZ", "YY");
```

After executing the next code, the array &AN will contain three elements, ZZ, MM, CC:

```
&AS.Replace(2, 2, "MM");
```

After executing the next code, the array &AN will contain three elements, ZZ, OO, CC.

```
&AS.Replace( - 2, - 1, "00");
```

The following image is an example of &AS expanded in PeopleCode debugger.

Local Name	Local Value
▢ &AS	Array
▢ Dimension	1
▢ Len	3
▢ [1]	ZZ
▢ [2]	OO
▢ [3]	CC

Using Replace to Remove an Element

You can use the Replace method to remove an element from an array. Just specify the item you want replaces, with *length* equal to one.

The following example removes the item from &Index:

```
&Array.Replace(&Index, 1);
```

Related Topics

- [Substitute method: Array class](#)
- [Find method: Array class](#)

Reverse method: Array class

Syntax

```
Reverse()
```

Description

The Reverse method reverses the order of the elements in the array.

If the array is composed of subarrays, the Reverse method reverses only the elements in the super-array, it doesn't reverse all the elements in the subarrays. For example, the following:

```
&AN = CreateArray(CreateArray(1, 2), CreateArray(3, 4), CreateArray(5, 6)).reverse⇒  
();
```

results in &AN containing:

```
((5,6), (3,4), (1,2))
```

Parameters

None.

Returns

None.

Example

Suppose you had the following array.

```
Local Array of Sting &AS;
```

```
&AS = CreateArray("R", "O", "S", "E");
```

If you executed the Reverse method on this array, the elements would be ESOR.

Related Topics

- [Sort method: Array class](#)

Set method: Array class

Syntax

```
Set(index)
```

Description

Use the Set method to set the value of the *index* element of an array. This method is used with the Java PeopleCode functions, instead of using subscripts (which aren't available in Java.)

Using this method is the same as using a subscript to reference an item of an array. In the following example, the two lines of code are identical:

```
&MyArray[8] = &MyValue;
```

```
&MyArray.Set(8) = &MyValue;
```

Parameters

Parameter	Description
<i>index</i>	The array element to be accessed.

Returns

None.

Related Topics

- [Get method: Array class](#)
- [Understanding Java Class](#)
Using the PeopleCode Java functions, you can access Java classes, or create instances of Java objects. Calling a Java program from PeopleCode can greatly extend your

application. Also, the PeopleCode integration with Java enables you to pass parameters such as record, record fields, or rowsets into Java programs.

Shift method: Array class

Syntax

`Shift()`

Description

Use the Shift method to remove the first element from the array and return it. Any following elements are "shifted" to an index of one less than they had.

Parameters

None.

Returns

Returns the value of the first element of the array. If the first element is a subarray, the subarray is returned.

Example

```
For &i = 1 to &ARRAY.Len;  
    &ITEM = &ARRAY.Shift();  
    /* do processing */  
End-For;
```

Related Topics

- [Pop method: Array class](#)
- [Push method: Array class](#)
- [Replace method: Array class](#)
- [Unshift method: Array class](#)

Sort method: Array class

Syntax

`Sort(order)`

Description

The Sort method rearranges the elements of the array executing the method into an order.

The type of sort done by this function, that is, whether it is a linguistic or binary sort, is determined by the **Sort Order Option** on the PeopleTools Options page.

If the array is one-dimensional, the elements are arranged in either ascending or descending order.

The type of the first element is used to determine the kind of comparison to be made. Any attempt to sort an array whose elements are not all of the same type results in an error.

If *order* is "A", the order is ascending; if it is "D", the order is descending. The comparison between elements is the same one as if done using the PeopleCode comparison operators (<, >, =, and so on.)

Note

If you execute this method on a server, the string sorting order is determined by the character set and localization of the server.

If the array is two-dimensional, the subarrays are arranged in order by the first element of each subarray. Sorting an array whose subarrays have different types of first elements will result in an error. The comparison is done by using the PeopleCode comparison operators (<, >, =, and so on.)

Note

This method works with arrays that have only one or two dimensions. You receive a runtime error if you try to use this method with an array that has more than two dimensions.

Parameters

Parameter	Description
<i>order</i>	Specifies whether the array should be sorted in ascending or descending order. Values for <i>order</i> are:
Value	Description
A	Ascending
D	Descending

Returns

None.

Example

The following example changes the order of the elements in array &A to be ("Frank", "Harry", "John").

```
&A = CreateArray("John", "Frank", "Harry");

&A.Sort();

&A = CreateArray(CreateArray("John", 1952), CreateArray("Frank", 1957),
Create⇒
Array("Harry", 1928));
```

The following example changes the order of the elements in array &A to be (("Frank", 1957), ("Harry", 1928), ("John", 1952)).

Local Name	Local Value
⊟ &A	Array
└ Dimension	2
└ Len	3
⊟ [1]	
└ Dimension	1
└ Len	2
└ [1]	John
└ [2]	1952
⊟ [2]	
└ Dimension	1
└ Len	2
└ [1]	Frank
└ [2]	1957
⊟ [3]	
└ Dimension	1
└ Len	2
└ [1]	Harry
└ [2]	1928

```
&A.Sort("A");
```

The following image is an example of &A expanded in PeopleCode debugger, showing code results.

Local Name	Local Value
⊞ &A	Array
└ Dimension	2
└ Len	3
⊞ [1]	
└ Dimension	1
└ Len	2
└ [1]	Frank
└ [2]	1957
⊞ [2]	
└ Dimension	1
└ Len	2
└ [1]	Harry
└ [2]	1928
⊞ [3]	
└ Dimension	1
└ Len	2
└ [1]	John
└ [2]	1952
◀	

Related Topics

- [Reverse method: Array class](#)
- System and Server Administration: Using Administration Utilities

Subarray method: Array class

Syntax

Subarray(*start*, *length*)

Description

The Subarray method creates a new array from an existing one, taking the elements from *start* for a total of *length*. If *length* is omitted, all elements from *start* to the end of the array are used.

If the array is multi-dimensional, the subarrays of the created array are *references* to the same subarrays from the existing array. This means if you make changes to the original subarrays, the referenced subarrays are also changed. To make distinct subarrays, use the Clone method.

Parameters

Parameter	Description
<i>start</i>	Specifies where in the array to begin the subarray.
<i>length</i>	Specifies the number of elements in the array to be part of the subarray.

Returns

An array object.

Example

To make a distinct array from a multi-dimensional array, use the following:

```
&A = &AAN.Subarray(1, 2).Clone();
```

Related Topics

- [Clone method: Array class](#)

Substitute method: Array class

Syntax

```
Substitute(old_val, new_val)
```

Description

The Substitute method replaces every occurrence of a value found in an array with a new value. To replace an element that occurs in a specific location in an array, use Replace.

If the array is one-dimensional, Substitute replaces every occurrence of the *old_val* in the array with *new_val*.

If the array is two-dimensional, Substitute replaces every subarray whose first element is equal to *old_val*, with the subarray given by *new_val*.

Note

This method works with arrays that have only one or two dimensions. You receive a runtime error if you try to use this method with an array that has more than two dimensions.

Parameters

Parameter	Description
<i>old_val</i>	Specifies the existing value in the array to be replaced.
<i>new_val</i>	Specifies the value with which to replace occurrences of <i>old_val</i> .

Returns

None

Example

The following example changes the array &A to be ("John", "Jane", "Hamilton").

```
&A = CreateArray();  
&A[1] = "John";  
&A[2] = "Jane";
```



```
&A[3] = "Henry";  
&A.Substitute("Henry", "Hamilton");
```

The following example changes the array &A to be (("John", 1952), ("Jane", 1957), ("Hamilton", 1971), ("Frank", 1961)).

```
&A = CreateArray(CreateArray("John", 1952), CreateArray("Jane", 1957),  
CreateArray=  
("Henry", 1928), CreateArray("Frank", 1961));
```

```
&A.Substitute("Henry", CreateArray("Hamilton", 1971));
```

Related Topics

- [Find method: Array class](#)
- [Replace method: Array class](#)

Unshift method: Array class

Syntax

```
Unshift(paramlist)
```

Where *paramlist* is an arbitrary-length list of values in the form:

```
value1 [, value2] ...
```

Description

The Unshift method adds the given elements to the *start* of the array. Any following elements are moved up to indexes that are larger by the number of values moved. Flattening and Promotion are used to change the dimension of the supplied parameters to be one less than that of the given array.

Parameters

Parameter	Description
<i>paramlist</i>	Specifies values to be added to the start of the array.

Returns

None.

Example

The following code changes &A to be ("x", "Y", "a", "B", "c").

```
&A = CreateArray("a", "B", "c");
```

```
&A.Unshift("x", "Y");
```

Related Topics

- [Pop method: Array class](#)
- [Push method: Array class](#)
- [Replace method: Array class](#)
- [Shift method: Array class](#)
- [Using Flattening and Promotion](#)

Several of the functions and methods that support arrays in PeopleCode use flattening and promotion to convert their operands to the correct dimension for the array.

Array Class Properties

In this section, we discuss the array class properties.

Dimension property: Array class

Description

The Dimension property is the number of "Array" type names from the declaration of the array, also called subarrays. This property returns a number.

This property is read-only.

Example

The following example sets &DIM to 2.

```
Local Array of Array of Number &AAN;
```

```
&DIM = &AAN.Dimension;
```

Len property: Array class

Description

The Len property is the current number of elements in the array. This property can be updated. Setting it to a negative value results in an error.

If this property is set to a smaller (nonnegative) number than its current value, the array is truncated to that length, discarding any elements whose indexes are larger than the given new length.

If this property is set to a number larger than its current value, the array is extended to the new length. Any new elements are set to a default value based on the element type of the array.

This property is read/write.

Example

The following is a test of whether an array is empty:

```
If &ARR.Len = 0 then
```

```
    /* &ARR is empty. */
```

```
End-If;
```

BannerTile Class

BannerTile Class

Contextual fluid dashboards allow application developers to design a fluid dashboard in which user-specified or fixed context values determine the content of the tiles displayed on the dashboard. As part of the development process of creating a contextual fluid dashboard, you must create a custom application class that implements this PTNUI:Banner:BannerTile base class.

Related Topics

- Portal Technology: Creating Contextual Fluid Dashboards

BannerTile Class Methods

In this section, the BannerTile class methods are presented in alphabetical order.

ApplyVisuals method: BannerTile class

Syntax

```
ApplyVisuals()
```

Description

You must invoke the ApplyVisuals method in the page Activate program for the dashboard header page to ensure that dashboard header component is displayed properly on all form factors.

Important

Usage of this method is required.

Parameters

None.

Returns

None.

Related Topics

- Portal Technology: Adding PeopleCode to the Dashboard Header Page and Component

BannerTile method: BannerTile class

Syntax

```
BannerTile(&homepage_ID)
```

Description

Use the BannerTile constructor method to instantiate an object of the superclass. In your implementation, the constructor method for your custom application class must invoke this method to instantiate an object of the superclass.

Parameters

Parameter	Description
<i>&homepage_ID</i>	Specifies the homepage ID for the fluid dashboard definition. This value, returned by the Request object, is used to instantiate an object of your custom application class, and then is passed to the superclass.

Returns

A BannerTile object.

Example

In the following example, the constructor method of the MyBannerComp class instantiates an object of the BannerTile superclass:

```
method MyBannerComp
  /+ &hp_ID as String +/
  %Super = create PTNUI:Banner:BannerTile(&hp_ID);
  %This.AnnounceText = "One or more tiles has been updated.";
  rem %This.IsPersistContext = False;
end-method;
```

Related Topics

- [Portal Technology: Creating a Custom Application Class](#)

ClearContextString method: BannerTile class

Syntax

```
ClearContextString()
```

Description**Note**

This method has been desupported. Use the DeleteContext, DeleteContextAndUpdate, or DeleteKey methods instead.

Parameters

None.

Returns

None.

Related Topics

- [DeleteContext method: BannerTile class](#)
- [DeleteContextAndUpdate method: BannerTile class](#)
- [DeleteKey method: BannerTile class](#)

DeleteContext method: BannerTile class

Syntax

```
DeleteContext()
```

Description

Use the DeleteContext method to delete all context keys and context values from memory. Only invoke this method if IsPersistContext is True.

Note

You must separately and explicitly update both the context for the tiles on the dashboard as well as the context fields displayed to the user.

Parameters

None.

Returns

None.

Related Topics

- [IsPersistContext property: BannerTile class](#)
- [DeleteContextAndUpdate method: BannerTile class](#)
- [DeleteKey method: BannerTile class](#)

- [UpdateContext method: BannerTile class](#)

DeleteContextAndUpdate method: BannerTile class

Syntax

DeleteContextAndUpdate()

Description

Use the DeleteContextAndUpdate method to delete all context keys and context values from memory and then update the tiles on the dashboard to reflect this change. Only invoke this method if IsPersistContext is True. For example, invoke DeleteContextAndUpdate in a FieldChange program associated with a Clear button to clear the context and update the dashboard and its tiles.

Note

You must separately and explicitly update the context fields displayed to the user.

Parameters

None.

Returns

None.

Example

```
import MYPKG:MyBannerComp;

Component MYPKG:MyBannerComp &oBanner;

/* Clears the context keys and values and updates the tiles. */
&oBanner.DeleteContextAndUpdate();

/* Clears the values displayed to the user. */
MY_REC.SETID.Value = "";
MY_REC.DESCR.Value = "";
```

Related Topics

- [IsPersistContext property: BannerTile class](#)
- [DeleteContext method: BannerTile class](#)
- [DeleteKey method: BannerTile class](#)

DeleteKey method: BannerTile class

Syntax

```
DeleteKey(KEYNAME)
```

Description

Use the DeleteKey method to delete an individual context key and value from memory by specifying the key's name. Only invoke this method if IsPersistContext is True.

Parameters

Parameter	Description
<i>KEYNAME</i>	Specifies the name of the key as a string value.

Returns

None.

Example

```
If &oBanner.IsKeyExist("SETID") Then  
    &oBanner.DeleteKey("SETID");  
End-If;
```

Related Topics

- [IsPersistContext property: BannerTile class](#)
- [DeleteContext method: BannerTile class](#)
- [DeleteContextAndUpdate method: BannerTile class](#)
- [UpdateContext method: BannerTile class](#)

GetBannerLabel method: BannerTile class

Syntax

```
GetBannerLabel()
```

Description

Override the GetBannerLabel method to set and return a label for the dashboard header component. Because this label is used for accessibility purposes, never set the label to an empty string.

Note

The default label is: Dashboard Header.

! Important

Do not explicitly invoke this method. It will be invoked by the PeopleSoft system as necessary.

Parameters

None.

Returns

A string value.

Example

The following implementation of GetBannerLabel overrides the base class implementation.

```
method GetBannerLabel
    /* Returns String */
    /* Extends/implements PTNUI:Banner:BannerTile.GetBannerLabel */
    Return "My Dashboard: Contextual Data Area";
end-method;
```

GetContextString method: BannerTile class

Syntax

GetContextString()

Description

Use the GetContextString method to return the context string as query string parameters. The following example demonstrates the string returned when two context keys are defined:

```
SETID=DFLTSET&CURRENCY=USD
```

Parameters

None.

Returns

A string value.

Example

```
&cxt_str = &oBanner.GetContextString();
```

Related Topics

- [SetKeyValue method: BannerTile class](#)
- [KeyVals property: BannerTile class](#)

GetGroupletURL method: BannerTile class

Syntax

GetGroupletURL()

Description

You must provide an implementation of the GetGroupletURL abstract method. In your implementation, return the URL to the dashboard header component as a string value.

! Important

Do not explicitly invoke this method. It will be invoked by the PeopleSoft system as necessary.

Parameters

None.

Returns

A string value.

Example

The following example shows an implementation of GetGroupletURL that uses the GenerateComponentContentURL built-in PeopleCode function to generate the URL string.

```
method GetGroupletURL
    /* Returns String */
    /* Extends/implements PTNUI:Banner:BannerTile.GetGroupletURL */
    Local string &url = GenerateComponentContentURL(%Portal, %Node,
MenuName.MY_MENU, "GBL", Component.MY_DRIVERCOMP, "", "");
    Return &url;
end-method;
```

Related Topics

- PeopleCode Language Reference: GenerateComponentContentURL function

GetKeyValue method: BannerTile class

Syntax

GetKeyValue(KEYNAME)

Description

Use the GetKeyValue method to return a string value representing the key value associated with the specified key.

Parameters

Parameter	Description
<i>KEYNAME</i>	Specifies the name of the key as a string value.

Returns

A string value.

Related Topics

- [GetContextString method: BannerTile class](#)
- [SetKeyValue method: BannerTile class](#)

IsKeyExist method: BannerTile class

Syntax

```
IsKeyExist(KEYNAME)
```

Description

Use the IsKeyExist method to return a boolean value indicating whether the specified key name exists.

Parameters

Parameter	Description
<i>KEYNAME</i>	Specifies the name of the key as a string value.

Returns

A boolean value.

Example

```
If &oBanner.IsKeyExist("SETID") Then  
    &oBanner.DeleteKey("SETID");  
End-If;
```

OverrideDefaultProperties method: BannerTile class

Syntax

```
OverrideDefaultProperties()
```

Description

Implement the OverrideDefaultProperties method in your custom application class to override the default setting for certain properties—for example, setting the IsExpanded property to False.

! Important

Do not explicitly invoke this method. It will be invoked by the PeopleSoft system as necessary.

Parameters

None.

Returns

None.

Example

```
method OverrideDefaultProperties
    /* Extends/implements PTNUI:Banner:BannerTile.OverrideDefaultProperties */
    Local number &count;
    SQLExec("Select count(*) FROM PS_TL_ESS_JOB_VW3 WHERE EMPLID=:1",
%EmployeeId, &count);
    If &count = 1 Then
        %This.IsExpanded = False;
    End-If;
end-method;
```

Related Topics

- [IsExpanded property: BannerTile class](#)
- Portal Technology: Creating a Custom Application Class

SetDefaultContext method: BannerTile class

Syntax

```
SetDefaultContext()
```

Description

Override the SetDefaultContext method to set the initial context keys and values for the dashboard header component.

i Note

If the IsPersistContext property is set to False in the constructor method of your custom application class, the default context keys and values are still propagated to the tiles on the dashboard. However, these keys and values are not retained in memory.

! Important

Do not explicitly invoke this method. It will be invoked by the PeopleSoft system as necessary.

Parameters

None.

Returns

None.

Example

The following example demonstrates how to override the SetDefaultContext method within your custom application class.

```
method SetDefaultContext
  /+ Extends/implements PTNUI:Banner:BannerTile.SetDefaultContext +/
  %This.SetKeyValue("SETID", "AUS01");
  %This.SetKeyValue("DESCR", "Default description");
end-method;
```

Related Topics

- Portal Technology: Creating a Custom Application Class
- [SetKeyValue method: BannerTile class](#)
- [IsPersistContext property: BannerTile class](#)

SetKeyValue method: BannerTile class

Syntax

SetKeyValue(*KEYNAME*, *KEYVALUE*)

Description

Use the SetKeyValue method to set a context key name and value pair.

Parameters

Parameter	Description
<i>KEYNAME</i>	Specifies the name of the context key as a string value.
<i>KEYVALUE</i>	Specifies the context value as a string value.

Returns

None.

Example

```
%This.SetKeyValue("SETID", "DFLTSET");
```

Related Topics

- [GetKeyValue method: BannerTile class](#)
- [SetDefaultContext method: BannerTile class](#)

UpdateContext method: BannerTile class

Syntax

```
UpdateContext()
```

Description

Use the UpdateContext method to pass the defined context keys and values from the dashboard header component to the tiles on the fluid dashboard. For example, invoke UpdateContext in a FieldChange program to pass user-supplied values to the tiles.

Parameters

None.

Returns

None.

Example

```
import MYPKG:MyBannerComp;

Component MYPKG:MyBannerComp &oBanner;

&oBanner.SetKeyValue("SETID", GetField(MY_REC.SETID).Value);
&oBanner.SetKeyValue("DESCR", GetField(MY_REC.DESCR).Value);

&oBanner.UpdateContext()
```

Related Topics

- [Portal Technology: Adding PeopleCode to the Dashboard Header Page and Component](#)

BannerTile Class Properties

In this section, the BannerTile class properties are presented in alphabetical order.

AnnounceText property: BannerTile class

Description

Use the AnnounceText property to set or return a string value representing an announcement to be posted to an ARIA (Accessible Rich Internet Applications) live region of the page when the tiles have been updated with new context values—for example, after UpdateContext has been invoked. This announcement is available to be read by screen readers and other assistive technologies.

Set this property in the constructor method of your custom application class.

Note

There is no default value; you must specify the announcement text.

This property is read/write.

Example

```
%This.AnnounceText = "One or more tiles has been updated.";
```

Related Topics

- [DeleteContextAndUpdate method: BannerTile class](#)
- [UpdateContext method: BannerTile class](#)
- Portal Technology: Creating a Custom Application Class

HomepageId property: BannerTile class

Description

Use the HomepageId property to return a string value representing the concatenation of the following values: *NODE_NAME.PORTAL_NAME.HOMEPAGE_NAME* For example:

```
QEDMO.EMPLOYEE.MY_CONTEXT_DB
```

This property is read-only.

Related Topics

- [HomepageName property: BannerTile class](#)
- [NodeName property: BannerTile class](#)
- [PortalName property: BannerTile class](#)

HomepageName property: BannerTile class

Description

Use the HomepageName property to return a string value representing the homepage ID that was specified by the *&homepage_ID* parameter when an object of your custom application class was instantiated in the dashboard header page's Activate event. This value, returned by the Request object, represents the content reference name for the fluid dashboard definition. For example:

MY_CONTEXT_DB

This property is read-only.

Related Topics

- [BannerTile method: BannerTile class](#)

IsExpanded property: BannerTile class

Description

Use the IsExpanded property to set or return a boolean value indicating whether the dashboard header page is expanded or not displayed at all. When IsExpanded is set to False, the dashboard header is hidden for all users affected by this change; otherwise users have the option whether to hide or display the dashboard header. To override the default value of this property, set it in the OverrideDefaultProperties method only.

Note

The default value is True.

While this property is read/write, you must set it using the OverrideDefaultProperties method in your custom application class implementation only.

Example

```
%This.IsExpanded = False;
```

Related Topics

- [OverrideDefaultProperties method: BannerTile class](#)

IsPersistContext property: BannerTile class

Description

Use the IsPersistContext property to set or return a boolean value indicating whether the context keys and values are persisted in memory throughout the user's session. Set this property in the constructor method of your custom application class. If IsPersistContext is set to False, the default context keys and values as specified by SetDefaultContext are still

propagated to the tiles on the dashboard. However, these keys and values are not retained in memory.

Note

The default value is True.

This property is read/write.

Example

```
%This.IsPersistContext = False;
```

Related Topics

- [SetDefaultContext method: BannerTile class](#)
- Portal Technology: Creating a Custom Application Class

KeyVals property: BannerTile class

Description

Use the KeyVals property to return an array of array of string representing the current context keys and key values. For example, KeyVals [1][1] represents the first context key, and KeyVals [1][2] represents the corresponding key value.

This property is read-only.

Example

For example, the GetContextString method returns the following context string:

```
SETID=DFLTSET
```

Then, KeyVals [1][1] equals SETID, and KeyVals [1][2] equals DFLTSET.

Related Topics

- [GetContextString method: BannerTile class](#)
- [GetKeyValue method: BannerTile class](#)
- [SetKeyValue method: BannerTile class](#)

NodeName property: BannerTile class

Description

Use the NodeName property to return a string value representing the node name for the current node.

This property is read-only.

PortalName property: BannerTile class

Description

Use the PortalName property to return a string value representing the node name for the current node.

This property is read-only.

BI Publisher Classes

Understanding BI Publisher and the BI Publisher Classes

Oracle Business Intelligence Publisher (BI Publisher, formerly XML Publisher) enables you to separate the data, layout, and translation layers of a report from each other. This can improve flexibility, as well as reduce maintenance. You need to create report definitions, define templates, and so on, using BI Publisher. The BI Publisher classes enable you to access the runtime portions of the XML publishing process programmatically—that is, after the templates and reports have been created.

The BI Publisher classes are divided into the following categories:

- Report manager definition classes
- Report manager search classes
- Engine classes

BI Publisher Report Manager Definition Classes

To create a report with BI Publisher, you first create a report definition using the Report Definition page. The report definition includes report properties, output formats, templates to be used, report security, and so on. At run time, the ReportDefn class uses these attributes to process the report. The ReportDefn class itself can be invoked from a batch process or a page PeopleCode. For example, the report can be scheduled from the Query Report Scheduler page, or viewed from Query Report Viewer page.

See [ReportDefn Class](#).

BI Publisher Report Manager Search Classes

After you've published a report, it is stored in the report repository. Using the report manager search classes, you can search for a report based on defined search keys, or even add additional search keys for searching.

See [Report Class](#).

See [ReportManager Class](#).

See [SearchAttribute Class](#).

BI Publisher Engine Classes

Use the BI Publisher engine classes to combine PDF files into a single PDF file, and to specify page numbers and watermarks on merged PDF reports.

See [PageNumber Class](#).

See [PDFMerger Class](#).

See [Properties Class](#).

See [Watermark Class](#).

Related Topics

- BI Publisher for PeopleSoft: BI Publisher Overview

BI Publisher Terms


The following is a list of general BI Publisher terms and their definitions.

Field or Control	Description
EFT	Electronic Funds Transfer, a format used by the banking industry.
eText	Electronic text, specifically, files in ASCII text format.
FO	Formatting objects, an XML markup language for document formatting.
HTML	Hyper Text Markup Language, a markup language designed for the creation of web pages.
PDF	Portable Document Format, a file format developed by Adobe Systems for representing documents in an independent format.
RTF	Rich Text Format, a document file format used for cross-platform document interchange.
XML	Extendable Markup Language, a general purpose markup language for many types of data.
SMS	Short messaging service, a short alphanumeric (160 characters) that is generally sent to a mobile device, such as a mobile phone.

BI Publisher Flow Diagram

The following diagram presents the general flow of an XML report showing how and when certain BI Publisher classes are used in the publishing process.

BI Publisher prepares the report data from the data source: a PS Query, a connected query, or an XML file. Then, BI Publisher uses the PSXP_RPTDEFNMANAGER report definition classes to generate and route the report. Optionally, BI Publisher uses the PSXP_REPORTMGR search classes to search for a report in the reports repository.

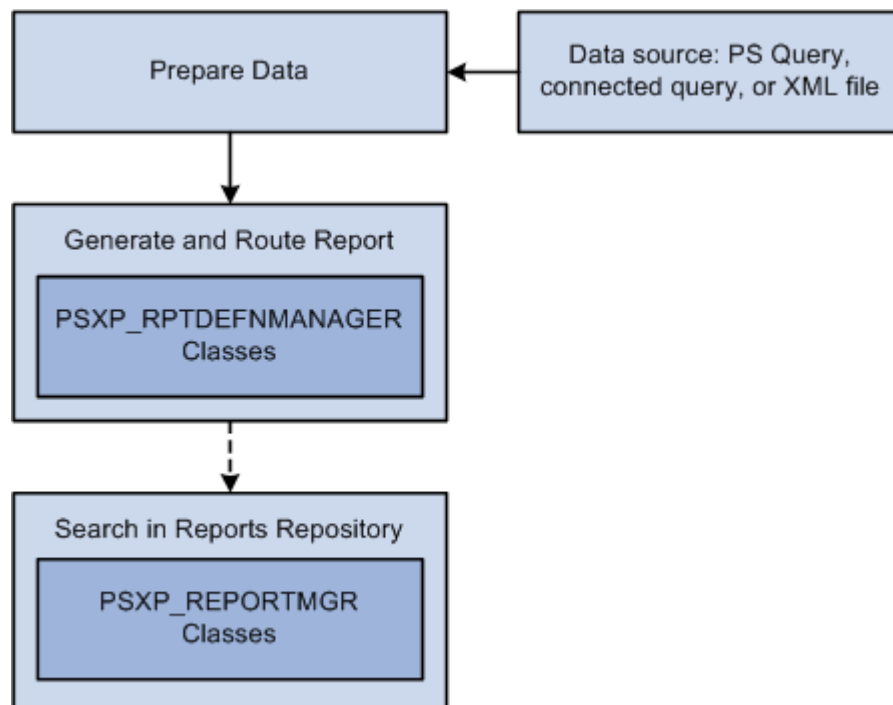

Error Handling

Different BI Publisher classes handle errors differently.

Use of report manager definition and report manager search classes should be wrapped in a try-catch statement to handle any errors. The BI Publisher engine class methods typically contain an error parameter as part of their signature that you can check for any errors. Other BI Publisher classes generally return a populated object that can be checked for a null value to determine any errors.

Related Topics

- PeopleCode Language Reference: try function

Data Type and Scope of BI Publisher Objects

Each BI Publisher class is its own data type—that is, report definitions are declared as the ReportDefn data type, a report manager is declared as the ReportManager type, and so on.

An BI Publisher object can be declared of type local, component, or global and instantiated from PeopleCode only.

Instantiating BI Publisher Objects

The BI Publisher classes are not built-in classes, like Rowset, Field, Record, and so on. They are application classes. Before you can use these classes in your PeopleCode program, you must import them into your program.

Your import statements should look similar to the following:

```
import PSXP_RPTDEFNMANAGER: *;
```

Note

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

After you've imported the appropriate BI Publisher classes, you instantiate an object of one of those classes using the constructor for the class and the create method.

The following example declares the variable `&rptDefn` and creates a new instance of the `ReportDefn` class:

```
Local PSXP_RPTDEFNMANAGER:ReportDefn &rptDefn = create
PSXP_RPTDEFNMANAGER:Report⇒
Defn(&rptDefnId);
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

Search Operator Values

Methods in the report manager definition and report search manager classes enable you to search for existing definitions. Many of the parameters for these methods should be specified in pairs, that is, a value specified with a search operator. All the search operator parameters use the same values.

Value	Description
%PSXP_SrchBegins	The name to search for begins with the specified value.
%PSXP_SrchContains	The name to search for contains the specified value.
%PSXP_SrchEquals	The name to search for equals the specified value.
%PSXP_SrchNotEquals	The name to search for does not equal the specified value.
%PSXP_SrchLessThan	The name to search for is less than the specified value.
%PSXP_SrchLessEquals	The name to search for is less than or equal to the specified value.
%PSXP_SrchGreaterThan	The name to search for is greater than the specified value.

Value	Description
%PSXP_SrchGreaterEquals	The name to search for is greater than or equal to the specified value.
%PSXP_SrchBetween	The name to search for is between two values. Separate the values by a comma. Do not use quotation marks. For example, ACCT1, ACCT9.
%PSXP_SrchIn	The name to search for is in the specified list. Separate the values with commas. Do not use quotation marks. For example, ACCT1, ACCT2, ACCT3.

BI Publisher Classes Reference

The BI Publisher classes reference includes the *public* subset of BI Publisher classes divided into the following sections:

- BI Publisher report manager definition classes.
- BI Publisher report manager search classes.
- BI Publisher engine classes.

BI Publisher Report Manager Definition Classes

The following report manager definition classes are described in this chapter: ReportDefn class.

ReportDefn Class

This section provides an overview of the ReportDefn class and discusses:

- ReportDefn class constructor
- ReportDefn class methods
- ReportDefn class properties

Use the ReportDefn class to process a report definition created through the Report Definition component. Use this class to generate and publish report output.

ReportDefn Class Constructor

This section describes the constructor for the ReportDefn class.

ReportDefn method: ReportDefn class

Syntax

```
ReportDefn(ReportId)
```

Description

Use the ReportDefn constructor to instantiate a ReportDefn object. You must then use the Get method to initialize the object.

Parameters

Parameter	Description
<i>ReportId</i>	Specify a unique ID to be associated with the report definition.

Returns

A reference to a ReportDefn object.

Example

```
import PSXP_RPTDEFNMANAGER:ReportDefn;

Local PSXP_RPTDEFNMANAGER:ReportDefn &rptDefn = create
PSXP_RPTDEFNMANAGER:Report⇒
Defn(&rptDefnId);
&rptDefn.Get();
```

ReportDefn Class Methods

In this section, the ReportDefn class methods are presented in alphabetical order.

Close method: ReportDefn class

Syntax

```
Close()
```

Description

Use this method when there is an exception or error calling the ProcessReport method or any other output method (Publish, PrintOutout or DisplayOutput) of the ReportDefn class. Calling this method cleans up all temporary files, folders, and resources.

Parameters

None.

Returns

None.

Related Topics

- [DisplayOutput method: ReportDefn class](#)
- [PrintOutput method: ReportDefn class](#)
- [ProcessReport method: ReportDefn class](#)

- [Publish method: ReportDefn class](#)

DisplayOutput method: ReportDefn class

Syntax

DisplayOutput()

Description

Use the DisplayOutput method to display the report generated by the ProcessReport method in a separate browser window.

You must successfully call the ProcessReport method prior to calling this method.

This method displays a single report. Therefore, the report definition must not be set for bursting.

Note

The DisplayOutput method uses the file attachment functions, which are Think-Time functions. If this method is called after a SQL update, insert, or delete statement is executed on the database and not yet committed, it may result in a think-time error. If this is the case, and there is no reason for the SQL update to remain uncommitted, you can use the PeopleCode CommitWork function to commit the SQL changes to the database before calling DisplayOutput. Remember that forcing a commit on pending database updates is a serious step that prevents rollback errors. First, confirm that the context in which you are calling CommitWork is appropriate.

Parameters

None.

Returns

None.

Related Topics

- [Close method: ReportDefn class](#)
- [ProcessReport method: ReportDefn class](#)
- PeopleCode Developer's Guide: Think-Time Functions

EmailOutput method: ReportDefn class

Syntax

EmailOutput(*ProcessInstanceID*)

Description

Use the EmailOutput method to email the report generated by the ProcessReport method. This method can be used for bursted and non-burstured reports. You must successfully call the ProcessReport method prior to calling this method.

The report is distributed as an email attachment to the report viewers defined in the report definition, to users defined by the Distribution link during run-time report scheduling, or to external users when the IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA interface class is implemented.

Parameters

Parameter	Description
<i>ProcessInstanceID</i>	Specify the process instance of the calling process, such as the calling Application Engine program. Note: Invoking this method with a process instance ID of 0 is invalid; the EmailOutput method can only be used for scheduled reports.

Returns

A Boolean value: True if the report was sent (email) successfully; otherwise, False.

Related Topics

- [ProcessReport method: ReportDefn class](#)
- [Understanding the BIP_EMAIL_DATA Interface Class](#)
There may be situations where you want to distribute reports using email to recipients that do not have PeopleSoft user profiles. PeopleTools enables you to distribute bursted and non-burstured BI Publisher reports to external users whose email addresses are stored in the database, file server, or another location.

Get method: ReportDefn class

Syntax

Get()

Description

Use the Get method to return a reference to the existing ReportDefn object.

Parameters

None.

Returns

A reference to the newly instantiated and populated ReportDefn object.

GetOutDestFormatString method: ReportDefn class

Syntax

```
GetOutDestFormatString(OutDestFormat)
```

Description

Use the GetOutDestFormatString method to convert the output format returned from system variable %OutDestFormat to a BI Publisher output format string that can be passed to the output type parameter of the ProcessReport method. This method is useful when processing reports generated by application engine programs that are run process scheduler.

Parameters

Parameter	Description
<i>OutDestFormat</i>	Specify the output destination format as a number. If you specify something other than a valid value, the method throws an exception. Valid values are:
Value	Description
2	PDF format
5	HTM format
8	XLS format
12	RTF format

Returns

A string if successful. Valid values are:

- PDF
- HTM
- XLS
- RTF

Related Topics

- [ProcessReport method: ReportDefn class](#)

GetPSQueryPromptRecord method: ReportDefn class

Syntax

```
GetPSQueryPromptRecord()
```

Description

Use the GetPSQueryPromptRecord method to return the runtime prompts of a query as a record object. This method should only be used when the data source type associated with the

report definition is a PeopleSoft query or a Composite Query. This method returns a null when the data source type isn't a PeopleSoft Query or a Composite Query.

Parameters

None.

Returns

A record object populated with the query prompts if the data source definition is a PeopleSoft query or a Composite Query, null otherwise.

Related Topics

- [SetPSQueryPromptRecord method: ReportDefn class](#)

PrintOutput method: ReportDefn class

Syntax

```
PrintOutput(DestPrinter)
```

Description

Use the PrintOutput method to print the report definition object executing the method. The ProcessReport method must be called successfully before you use this method.

Note

If you don't set the printer type with the SetPrinterType method before invoking PrintOutput, the default value of *PDF* is used.

Parameters

Parameter	Description
<i>DestPrinter</i>	Specify the printer you want to use for printing the report, as a String.

Returns

None.

Related Topics

- [Close method: ReportDefn class](#)
- [SetPrinterType method: ReportDefn class](#)

ProcessReport method: ReportDefn class

Syntax

```
ProcessReport(TemplateId, LanguageCD, AsOfDate, OutputFormat)
```

Description

Use the ProcessReport method to generate a report and store the information.

Before you generate the report, you must:

- Set the report output destination with the OutDestination property if the output type is a file.
- Specify the data source using the SetRuntimeDataXMLFile method if you are using a data source other than a PeopleSoft query.

After you use the ProcessReport method, you can use the Publish method to post the report, the DisplayOutput method to display the report in a browser window, or the PrintOutput method to print the report.

Parameters

Parameter	Description
<i>TemplateId</i>	Specify the template to be used for processing this report, as a string. You can specify a null value for this parameter, that is, (""). When you specify a null value, the default template associated with the report definition is used.
<i>LanguageCD</i>	Specify the three-letter language code for the report definition, such as ENG, FRA, ESP and so on. This parameter controls both the translation and the language specific output details such as font selection and right-to-left page orientation for Arabic/Hebrew. You can specify a null value for this parameter, that is, (""). If you specify a null value, the current language of the session is used.
<i>AsOfDate</i>	Specify the as of date for the report, as a date.
<i>OutputFormat</i>	Specify the output format, as a string. See GetOutDestFormatString method: ReportDefn class. You can specify a null value for this parameter, that is, (""). When you specify a null value, the default output format associated with the report definition is used.

Returns

None.

Related Topics

- [GetOutDestFormatString method: ReportDefn class](#)
- [DisplayOutput method: ReportDefn class](#)
- [PrintOutput method: ReportDefn class](#)
- [SetPSQueryPromptRecord method: ReportDefn class](#)
- [SetRuntimeDataXMLFile method: ReportDefn class](#)
- [SetRuntimeProperties method: ReportDefn class](#)

- [OutDestination property: ReportDefn class](#)

Publish method: ReportDefn class

Syntax

`Publish(ServerName, ReportPath, FolderName, ProcessInstanceID)`

Description

Use the Publish method to publish the current report definition

You must have successfully completed a call to the ProcessReport method before you can use this method.

The Publish method was intended to be used primarily for reports running on the Process Scheduler server, but can also be used when running the report on the application server as well. In the latter case, even though the report is run on the application server, the report distribution must occur on an active Process Scheduler server that is configured with a running Distribution Agent service and a properly configured report node.

- When the Publish method is called while running a report using the Process Scheduler server, the *ServerName* parameter must be specified as a blank string (""), and the *ProcessInstanceID* parameter must be set to the process instance of the calling process.
- When the Publish is called while running a report on the application server, the *ServerName* parameter must be specified with an active Process Scheduler server that will post the report. The specified server must also have access to the report output destination folder in order to successfully post the report. If the application server and the Process Scheduler server share the same physical host machine, this will not be a concern. If not, you may specify an alternate output destination folder for the report (for example, a network share location) using the report definition's OutDestination property to ensure that the Process Scheduler server is able to access it for posting the report.

Parameters

Parameter	Description
<i>ServerName</i>	Specify the server to use for publishing the report, as a string. You can specify a null value for this parameter—that is, ("").
<i>ReportPath</i>	Always specify a null value only for this parameter—that is, ("").
<i>FolderName</i>	Specify the name of the report folder that the report should be posted to. You can specify a null value for this parameter—that is, (""). If you do not provide a value for this parameter, the default folder is used to post reports.
<i>ProcessInstanceID</i>	Specify the process instance of the calling process, such as the calling Application Engine program. If you specify a 0, a new process instance is generated to track the report posting process.

Returns

None.

Related Topics

- [Close method: ReportDefn class](#)
- [ProcessReport method: ReportDefn class](#)
- [OutDestination property: ReportDefn class](#)

setPDFConversionFiles method: ReportDefn class

Syntax

```
setPDFConversionFiles(&inputFiles)
```

Description

Use the setPDFConversionFiles method to specify the paths to external documents to be converted to PDF and merged with the main report. You must call this method before invoking the ProcessReport method.

BI Publisher for PeopleSoft enables you to include attachments from external sources with a PDF report. The source attachments are converted to PDF format and then merged with the main report. The report is then displayed to the end users or delivered to Report Manager.

Parameters

Parameter	Description
<i>&inputFiles</i>	Specify an already instantiated array of String representing the paths to the external documents to include in the report as PDF files.

Returns

None.

Example

```
Local number &oitTimeOut = 15;  
&oRptDefn.setPDFConversionFiles(&inputFiles);  
&oRptDefn.setPDFConversionTimeOut(&oitTimeOut);
```

Related Topics

- [BI Publisher for PeopleSoft: Including External Attachments with BI Publisher Reports](#)

setPDFConversionPageNumbering method: ReportDefn class

Syntax

```
setPDFConversionPageNumbering(x_pos, y_pos)
```

Description

Use the `setPDFConversionPageNumbering` method to specify the position of the page numbering across merged attachments and the main report. If this method is not invoked, no page numbers will be added to the pages in the report.

Note

Double page numbering will occur if you invoke this method when the report itself or any of the attachments include their own internal page numbering.

You must use this method before using the `ProcessReport` method.

Parameters

Parameter	Description
<i>x_pos</i>	Specify an integer value representing the position in 72 dpi pixels from the left edge of the page.
<i>y_pos</i>	Specify an integer value representing the position in 72 dpi pixels from the bottom edge of the page.

Returns

None.

Example

```
&orptDefn.setPDFConversionPageNumbering(550, 15);
```

Related Topics

- BI Publisher for PeopleSoft: Including External Attachments with BI Publisher Reports

setPDFConversionTimeout method: ReportDefn class

Syntax

```
setPDFConversionTimeout(seconds)
```

Description

Use the `setPDFConversionTimeout` method to specify a time-out interval for PDF conversion for this report that overrides the value of the `psxp_pdfconversion_timeout` global property.

You must use this method before using the `ProcessReport` method.

Parameters

Parameter	Description
<i>seconds</i>	Specify a Number value representing the time-out interval in seconds.

Returns

None.

Example

```
Local number &oitTimeOut = 15;  
&orptDefn.setPDFConversionFiles(&inputFiles);  
&orptDefn.setPDFConversionTimeOut(&oitTimeOut);
```

Related Topics

- [BI Publisher for PeopleSoft: Including External Attachments with BI Publisher Reports](#)

SetPrinterType method: ReportDefn class

Syntax

```
SetPrinterType(OutDestFormat)
```

Description

Use the SetPrinterType method to set the printer type when using the PrintOutput method. If you don't set the printer type before invoking PrintOutput, the default value of *PDF* is used.

Parameters

Parameter	Description
<i>OutDestFormat</i>	Specify the printer type as a String value: • "PDF" • "PCL" • "PS"

Returns

None.

Related Topics

- [PrintOutput method: ReportDefn class](#)

SetPSQueryPromptRecord method: ReportDefn class

Syntax

```
SetPSQueryPromptRecord(&Record)
```

Description

Use the SetPSQueryPromptRecord method to specify an already instantiated record object that contains the prompt values for the query to be used to populate the report.

This method can only be used with reports that have a PeopleSoft query or a Composite Query defined as the data source.

You must use this method before using the ProcessReport method.

Parameters

Parameter	Description
<i>&Record</i>	Specify an already instantiated and populated record object that contains the values for the query to be used to populate the report.

Returns

None.

Related Topics

- [ProcessReport method: ReportDefn class](#)
- [GetPSQueryPromptRecord method: ReportDefn class](#)
- [Understanding Query Classes](#)

You create queries using PeopleSoft Query Manager to extract the data you need from the PeopleSoft database. You can use the query classes in PeopleCode to create a new query, or to modify or delete an existing query. You can also use methods in the Query class to execute the query and have the result set returned as either a rowset or have it format and write the result set to a file. You can also use the query classes to create a SQL statement to be used with the SQL object. In fact, the query classes expose all of the attributes and methods needed by the PeopleSoft Query Manager and Query Viewer applications.

SetRuntimeDataXMLFile method: ReportDefn class

Syntax

SetRuntimeDataXMLFile(*FilePath*)

Description

Use the SetRuntimeDataXMLFile method to specify an existing XML file as the data source for the report.

Note

Because the SetRuntimeDataRowset and SetRuntimeDataXMLDoc methods have been desupported, use this SetRuntimeDataXMLFile method instead.

Report definitions that use a data source other than a PeopleSoft query must set that data source before generating the report using the ProcessReport method.

Forward or back slashes are used in the path according to the operating system of the application server or process scheduler server—that is, on Unix servers, the directory separator is a forward slash, while Windows servers use back slashes.

Parameters

Parameter	Description
<i>FilePath</i>	Specify an absolute path to the file that you want to use. You must include the file name and file extension in the parameter. Forward or back slashes are used in the path according to the operating system of the application server or process scheduler server. That is, on Unix servers, the directory separator is a forward slash, while a Windows server use a path with back slashes.

Returns

None.

Related Topics

- [ProcessReport method: ReportDefn class](#)
- [Understanding File Layout](#)
PeopleTools supports reading and writing to plain text files, and to files that have a format based on a File Layout definition that has been created in Application Designer.

SetRuntimeProperties method: ReportDefn class

Syntax

```
SetRuntimeProperties(&NameArray, &ValueArray)
```

Description

Use the SetRuntimeProperties method to set additional runtime values and properties required for generating this report.

Note

BI Publisher's properties are defined at three different levels. Global properties are defined on the Global Properties page, and system properties are defined in the xdo.cfg file. At the report definition level, properties are defined on the Report Definition - Properties page. The runtime properties defined using this method override both global and report definition properties. However, system properties defined in the xdo.cfg file cannot be overridden using this method.

Parameters

Parameter	Description
<i>&NameArray</i>	Specify an already instantiated and populated array of string containing the names of the additional properties or variables that you need for this report.
<i>&ValueArray</i>	Specify an already instantiated and populated array of string containing the values of the additional properties or variables that you need for this report. The values should be in the same order as the names listed in <i>&NameArray</i> .

Returns

None.

Example

The following example sets extra parameters for securing a document.

```
&asPropName = CreateArrayRept("", 0);
&asPropValue = CreateArrayRept("", 0);
&asPropName.Push("pdf-compression");
&asPropValue.Push("false");
&asPropName.Push("pdf-hide-menubar");
&asPropValue.Push("true");
&oRptDefn.SetRuntimeProperties(&asPropName, &asPropValue);
```

Setting Custom Runtime Parameters

The SetRuntimeProperties method can also be used to set custom runtime parameters. When setting custom runtime parameters with the SetRuntimeProperties method, the parameter names need to be prefixed with *xslt*, and the values need to be surrounded by single quotes (for example, 'xyz'). For example, the following code creates a custom runtime parameter named *xslt.ReportOwner*:

```
&asPropName = CreateArrayRept("", 0);
&asPropValue = CreateArrayRept("", 0);
&asPropName.Push("xslt.ReportOwner");

/* Note the single quotes around the parameter value */
&asPropValue.Push(" 'John Smith' ");

&oRptDefn.SetRuntimeProperties(&asPropName, &asPropValue);
```

The custom parameter may now be used in the template via the tag `<?<ReportOwner?>`. Before using it, it does need to be declared in a form field on the report template using the following tag:

```
<xsl:param name="ReportOwner" xdofo:ctx="begin"/>
```

Related Topics

- [BI Publisher for PeopleSoft: Running Reports Using PeopleCode](#)
- [BI Publisher for PeopleSoft: Setting Up BI Publisher](#)
- [BI Publisher for PeopleSoft: Creating Report Definitions](#)
- [BI Publisher for PeopleSoft: Defining System Properties](#)

ReportDefn Class Properties

In this section, the ReportDefn class properties are presented in alphabetical order.

Description property: ReportDefn class

Description

Use the Description property to return a description for the report definition.

This property is effectively read-only.

DestinationPrinter property: ReportDefn class

Description

Use the DestinationPrinter property to specify a printer for the generated report.

This property is read/write.

FolderName property: ReportDefn class

Description

Use the FolderName property to specify a folder name for the generated report to be posted to.

This property is read/write.

OutDestination property: ReportDefn class

Description

This property sets the report output destination as a string. This property must be set before calling the ProcessReport method. When ProcessReport is called, it places the generated report files in the directory specified by this property.

If this property is not set prior to calling the ProcessReport method, the report processing directory and the value returned by the OutDestination property depends on the setting of the psxp_usedefaultoutdestination property. The psxp_usedefaultoutdestination property, which is set on the Report Definition - Properties page, is used to set a compatibility mode with pre-8.50 PeopleTools versions.

See [BI Publisher for PeopleSoft: Setting Report Properties](#).

This property is effectively write-only.

! Important

While this property is read/write, your PeopleCode program should read this property only if the program set the property first. Reading the property before it has been explicitly set produces unexpected results.

Related Topics

- [ProcessReport method: ReportDefn class](#)

OutDestinationType property: ReportDefn class

Description

This property returns the type of device specified for the output of the report definition, as a string.

This property returns the output destination value set on the Report Definition-Output page; it is not used internally to determine the output type. It can be used in a PeopleCode program to determine how to process and produce report output (for example, whether to call Publish, how to set OutDestination).

This property is effectively read-only.

ProcessInstance property: ReportDefn class

Description

Use this property to specify a number representing a process instance for running the report.

In certain circumstances—for example, when running report using a Process Scheduler server—a process instance number is required for setting drilling URLs in the report output. In these cases, you must set the ProcessInstance property prior to calling the ProcessReport method.

This property is read/write.

Example

```
&ProcessInstance=PSXPQRYRPT_AET.PROCESS_INSTANCE;  
&orptDefn.ProcessInstance = &ProcessInstance;  
&orptDefn.ProcessReport("", "", %Date, "");
```

ReportFileName property: ReportDefn class

Description

Use the ReportFileName property to specify the file name for the generated report as a string. When this property is set, it overrides the setting of the UseBurstValueAsOutputFileName property.

This property is read/write.

Related Topics

- [UseBurstValueAsOutputFileName property: ReportDefn class](#)

Status property: ReportDefn class

Description

This property returns the status of the report definition as a string. Valid values are:

Value	Description
A	The report definition is active and can be run.
I	The report definition is inactive and cannot be run.
P	The report definition is in progress and cannot be run. This is the default value.

This property is read-only.

UseBurstValueAsOutputFileName property: ReportDefn class

Description

Use the UseBurstValueAsOutputFileName property to specify different names for all the files that result from bursting. This property takes a Boolean value: true, the report output files are named *BurstValue.Extension*. False is the default value.

Note

If the ReportFileName property is set, it overrides the setting of this property.

This property is read/write.

Related Topics

- [ReportFileName property: ReportDefn class](#)

BI Publisher Report Manager Search Classes

The following report manager search classes are described in this chapter:

- Report class
- ReportManager class
- SearchAttribute class

Report Class

This section provides an overview of the Report class and discusses:

- Report class constructor
- Report class properties

The Report class is one of the report manager search classes. Use the Report class to access individual reports that have already been published to the report repository.

Report Class Constructor

This section describes the constructor for the Report class.

Report method: Report class

Syntax

```
Report(RptId, Prclsinstance, Contentid, Dbname, RptName, RptDescr, RptURL,  
RptCreateDttm, RptExpireDt, FldrName)
```

Description

Use the Report constructor to instantiate and populate a Report object with the data of an already published report.

Parameters

Parameter	Description
<i>RptId</i>	Specify the report ID of the report you want to access, as a string.
<i>Prclsinstance</i>	Specify the process instance of the report you want to access, as a number.
<i>Contentid</i>	Specify the content ID number of the report you want to access, as a number.
<i>Dbname</i>	Specify the data base name, as a string.
<i>RptName</i>	Specify the name of the report you want to access, as a string.
<i>RptDescr</i>	Specify the description of the report you want to access, as a string.
<i>RptURL</i>	Specify the URL to the report details page, as a string.
<i>RptCreateDttm</i>	Specify the date and time of the report you want to access, as a date time value.
<i>RptExpireDt</i>	Specify the date when the report will be archived, and no longer considered active, as a date.
<i>FldrName</i>	Specify the name of the folder the report was published to, as a string. You must specify an absolute path name, using forward and back slashes as required by the operating system of the application server or process scheduler.

Returns

A reference to a Report object.

Example

```
import PSXP_REPORTMGR:Report;

Local PSXP_REPORTMGR:Report &oRpt = create
PSXP_REPORTMGR:Report(String(&nRptId),⇒
    &prcsinstance, &contentid, &sdbname, &sRptName, &sRptDescr, &sRptURL, &sFile⇒
URL, &dRptCreateDttm, &dRptExpireDt, &sFldrName);
```

Report Class Properties

In this section, the Report class properties are presented in alphabetical order.

contentId property: Report class

Description

This property returns the content ID of the report, as a number.

This property is read-only.

CreatedDateTime property: Report class

Description

This property returns the date time when the report was created, as a date time.

This property is read-only.

DatabaseName property: Report class

Description

This property returns the data base name associated with the report, as a string.

This property is read-only.

Description property: Report class

Description

This property returns the description of the report definition, as a string.

This property is read-only.

ExpireDate property: Report class

Description

This property returns the date when the report will be archived, as a date value.

This property is read-only.

FileURL property: Report class

Description

This property returns a URL to the actual report file in the report repository.

Use the ReportURL property to access the report detail page instead.

This property is read-only.

Related Topics

- [ReportURL property: Report class](#)

FolderName property: Report class

Description

This property returns the full path name of the folder where the report is stored, as a string.

This property is read-only.

ProcessInstanceId property: Report class

Description

This property returns the process instance ID associated with the report when it was posted, as a number.

This property is read-only.

Related Topics

- [ReportInstanceId property: Report class](#)

ReportInstanceId property: Report class

Description

This property returns the report instance ID, that was populated when the report was run, as a number.

This property is read-only.

Related Topics

- [ProcessInstanceId property: Report class](#)

ReportName property: Report class

Description

This property returns the name of the report, as a string.

This property is read-only.

ReportURL property: Report class

Description

This property returns a URL as a string, that points to the report detail page.

Use the FileURL to access a URL to the actual file containing the report in the report repository.

This property is read-only.

Related Topics

- [FileURL property: Report class](#)

ReportManager Class

This section provides an overview of the ReportManager class and discusses:

- ReportManager class constructor
- ReportManager class methods

The ReportManager class is one of the report manager search classes. Use the ReportManager class to set the search criteria for reports that have already been published to the report repository.

ReportManager Class Constructor

This section describes the constructor for the ReportManager class.

ReportManager method: ReportManager class

Syntax

```
ReportManager ( )
```

Description

Use the ReportManager constructor to instantiate an instance of the ReportManager class.

Parameters

None.

Returns

A ReportManager object.

Example

```
import PSXP_REPORTMGR:ReportManager;  
  
Local REPORTMGR:ReportManager &rptMgr = create REPORTMGR:ReportManager();
```

ReportManager Class Methods

In this section, the ReportManager class methods are presented in alphabetical order.

AddSearchFieldCriteria method: ReportManager class

Syntax

```
AddSearchFieldCriteria(&SearchAttribute)
```

Description

Use the AddSearchFieldCriteria method to add an already instantiated and populated SearchAttribute object to the search.

Parameters

Parameter	Description
<i>&SearchAttribute</i>	Specify an already instantiated and populated SearchAttribute object.

Returns

A Boolean, true if the criteria was added successfully, false otherwise.

Example

```
Local PSXP_REPORTMGR:SearchAttribute &oSearch;  
Local integer &compOpSrch;  
  
&CompOpSrch = oRptMgr.PSXP_SrchBegins;  
  
&oSearch = create PSXP_REPORTMGR:SearchAttribute(&sAttrname, &sAttrVal, ⇒  
&compOpSrch);  
  
&bResult = &oRptMgr.addSearchFieldCriteria(&oSearch);
```

Related Topics

- [SearchAttribute Class](#)
This section provides an overview of the SearchAttribute class and discusses:

GetReportList method: ReportManager class

Syntax

```
GetReportList()
```

Description

Use the GetReportList method to return a list of the report objects that satisfy all the criteria you specified with the other methods associated with the ReportManager object.

Parameters

None.

Returns

An array of Report objects.

Related Topics

- [Report Class](#)

This section provides an overview of the Report class and discusses:

SetBurstFieldCriteria method: ReportManager class

Syntax

```
SetBurstFieldCriteria(BurstFld, BurstOp, BurstValue)
```

Description

Use the SetBurstFieldCriteria method to specify the burst criteria to be used with searching report definitions.

Parameters

Parameter	Description
<i>BurstField</i>	Specify the name of the burst field used to generate the report, as a string.
<i>BusrtOp</i>	Specify the search operator to be used <i>BurstField</i> , as a string. See Search Operator Values .
<i>BurstValue</i>	Specify the pattern string to be matched with burst field value using <i>BurstOp</i> .

Returns

A Boolean value, true if the method completes successfully, false otherwise.

SetCaseSensitive method: ReportManager class

Syntax

```
SetCaseSensitive(IsCaseSensitive)
```

Description

Use the `SetCaseSensitive` method to specify the case sensitivity flag applicable to search field and bursting criteria for searching reports.

Parameters

Parameter	Description
<i>IsCaseSensitive</i>	Specify a Boolean value: true to make the search case sensitive, false to make it case insensitive.

Returns

None.

SetDateCriteria method: ReportManager class

Syntax

```
SetDateCriteria(createdDate, createdLastVal, createdUnit)
```

Description

Use the `SetDateCriteria` method to specify the creation date criteria for searching reports.

Parameters

Parameter	Description
<i>createdDate</i>	Specify a date used to search for reports generated on and after this date. You should specify a null value (" ") for this parameter if using <i>createdLastVal</i> and <i>createdUnit</i> .
<i>createdLastVal</i>	Specify a value to be used in conjunction with <i>createdUnit</i> , as a number. If you specify a value, it is used and any value given for <i>createdDate</i> is ignored. If you are not using this search criteria, you should specify a null value (" ") for this parameter.
<i>createdUnit</i>	Specify a value to be used for reports generated during last <i>n</i> number of periodic units. This value is used with <i>createdLastVal</i> . For example, if <i>createdLastVal</i> is set to 10, and <i>createdUnit</i> is set to 1, the reports generated in the last ten days are returned. Valid values are:
Value	Description
1	Days
2	Hours
3	Minutes

Returns

None.

SetFolderCriteria method: ReportManager class

Syntax

```
SetFolderCriteria(FolderName)
```

Description

Use the SetFolderCriteria method to specify the folder criteria for searching reports.

Parameters

Parameter	Description
<i>FolderName</i>	Specify the name of the folder the report is posted in, as a string.

Returns

A Boolean value, true if the search criteria is added successfully, false otherwise.

SetProcessInstanceCriteria method: ReportManager class

Syntax

```
SetProcessInstanceCriteria(FromPID, ToPID)
```

Description

Use the SetProcessInstanceCriteria method to specify the process instance range criteria for searching reports.

Parameters

Parameter	Description
<i>FromPID</i>	Specify a process instance ID to be used as the starting range from which to search, as a number. This value must be less than or equal to <i>ToPID</i> . You can specify a null value for this parameter, that is, ("").
<i>ToPID</i>	Specify a process instance ID to be used as the ending range from which to search, as a number. This value must be greater than or equal to <i>FromPID</i> . You can specify a null value for this parameter, that is, ("").

Returns

A Boolean value: true if the search criteria is added successfully, false otherwise.

SetReportIDCriteria method: ReportManager class

Syntax

```
SetReportIDCriteria(ReportId)
```

Description

Use the SetReportIDCriteria method to specify a report ID for searching reports.

Parameters

Parameter	Description
<i>ReportId</i>	Specify a report ID to be used for searching for report definitions.

Returns

A Boolean value: true if the search criteria was set successfully, false otherwise.

SetUserIdCriteria method: ReportManager class

Syntax

```
SetUserIdCriteria(UserId)
```

Description

Use the SetUserIdCriteria method to specify a user ID to be used for searching reports intended to be accessed by that recipient.

Parameters

Parameter	Description
<i>UserId</i>	Specify the user ID to be matched with the intended recipient of the report.

Returns

A Boolean: true if the search criteria is set successfully, false otherwise.

SearchAttribute Class

This section provides an overview of the SearchAttribute class and discusses:

- SearchAttribute class constructor
- SearchAttribute class properties

The SearchAttribute class is one of the report manager search classes. Use the SearchAttribute class to discover name-value pairs for the search criteria for reports that have

already been published to the report repository. In addition, you can also specify a comparison operator to be used with the name-value pairs.

SearchAttribute Class Constructor

This section describes the constructor for the SearchAttribute class.

SearchAttribute method: SearchAttribute class

Syntax

```
SearchAttribute(AttrName, AttrValue, CompareOperator)
```

Description

Use the SearchAttribute constructor to instantiate an instance of a SearchAttribute object.

Parameters

Parameter	Description
<i>AttrName</i>	Specify the attribute name, as a string.
<i>AttrValue</i>	Specify the attribute value, as a string.
<i>CompareOperator</i>	Specify a comparison operator. See Search Operator Values .

Returns

A SearchAttribute object.

Example

```
import PSXP_REPORTMGR:SearchAttribute;

Local PSXP_REPORTMGR:SearchAttribute &oSearch = create PSXP_REPORTMGR:Search⇒
Attribute(&sAttrname, &sAttrVal, &compOpSrch);
```

SearchAttribute Class Properties

In this section, the SearchAttribute class properties are presented in alphabetical order.

attrName property: SearchAttribute class

Description

This property returns the attribute name used with search.

This property is read-only.

attrValue property: SearchAttribute class

Description

This property returns the attribute value used with search???

This property is read-only.

compareOp property: SearchAttribute class

Description

This property returns the comparison operator used with search.

This property is read-only.

BI Publisher Engine Classes

The following engine classes are described in this chapter:

- PageNumber class
- PDFMerger class
- Properties class
- Watermark class

PageNumber Class

This section provides an overview of the PageNumber class and discusses:

- PageNumber class constructor
- PageNumber class properties

Use the PageNumber class to set the page number for a merged PDF file. Objects in this class are used with the PageNumber property of the PDFMerger class.

Related Topics

- [PageNumber property: PDFMerger class](#)

PageNumber Class Constructor

This section describes the constructor for the PageNumber class.

PageNumber method: PageNumber class

Syntax

```
PageNumber ( )
```

Description

Use the PageNumber constructor to instantiate a PageNumber object.

Parameters

None.

Returns

A PageNumber object.

Example

```
import PSXP_ENGINE:PageNumber;  
  
Local PSXP_ENGINE:PageNumber &pNum = create PSXP_ENGINE:PageNumber();
```

PageNumber Class Properties

In this section, the PageNumber class properties are presented in alphabetical order.

BackgroundFile property: PageNumber class

Description

Use the BackgroundFile property to specify a file to be used for the page number, as a string.

You must specify an absolute file name.

This property is read/write.

Considerations Using the BackgroundFile Property

You should either use the BackgroundFile property, or you should use the other properties associated with this class, like position or font. You cannot use both.

The file you specify must be a PDF file. The page size of the background PDF must be the same as the target PDF document, otherwise the page numbering doesn't work properly. All page numbering starts on the first page of the target document.

FontName property: PageNumber class

Description

Use the FontName property to specify the name of the font to be used for the page number, as a string. Valid values are:

- Courier
- Courier-Bold
- Courier-BoldOblique
- Helvetica (this is the default value)
- Helvetica-Bold
- Helvetica-BoldOblique
- Helvetica-Oblique
- Symbol

- Times-Bold
- Time-BoldItalic
- Time-Italic
- Time-Roman
- ZapfDingbats

If you specify an invalid font name, the default (Helvetica) is used.

This property is read/write.

Related Topics

- [FontSize property: PageNumber class](#)

FontSize property: PageNumber class

Description

Use the FontSize property to specify the size of the page number, as a number.

The default value is 8.

This property is read/write.

Related Topics

- [FontName property: PageNumber class](#)

PositionX property: PageNumber class

Description

Use the PositionX property to specify the X axis position of the text page number in the merged document.

This property is read/write.

Related Topics

- [PositionY property: PageNumber class](#)

PositionY property: PageNumber class

Description

Use the PositionY property to specify the Yaxis position of the text page number in the merged document.

This property is read/write.

Related Topics

- [PositionX property: PageNumber class](#)

StartFromPageNum property: PageNumber class

Description

Use the StartFromPageNum property to specify the page index from which you'd like to start the page numbering.

For example, if you have a PDF document which has two cover pages, and you want to start printing page numbers on the document from the third page, specify a three for this property.

This property is read/write.

Related Topics

- [StartNum property: PageNumber class](#)

StartNum property: PageNumber class

Description

Use the StartNum property to specify the page number to use as the first page number in the merged document. If you don't specify a starting number, the pages are numbered starting from 1.

This property is read/write.

Related Topics

- [StartFromPageNum property: PageNumber class](#)

PDFMerger Class

This section provides an overview of the PDFMerger class and discusses:

- PDFMerger class constructor
- PDFMerger class method
- PDFMerger class properties

Use the PDFMerger class to combine two or more PDF files into a single PDF file.

PDFMerger Class Constructor

This section describes the constructor for the PDFMerger class.

PDFMerger method: PDFMerger class

Syntax

```
PDFMerger ( )
```

Description

Use the PDFMerger constructor to instantiate a PDFMerger object.

Parameters

None.

Returns

A reference to a PDFMerger object.

Example

```
import PSXP_ENGINE:PDFMerger;

Local PSXP_ENGINE:PDFMerger &oMerger = create PSXP_ENGINE:PDFMerger();
```

PDFMerger Class Methods

In this section, the PDFMerger class methods are described in alphabetic order.

isPDFValid method: PDFMerger class

Syntax

```
isPDFValid(PDFInputFile, Error)
```

Description

Use the isPDFValid method to test whether a PDF file has a valid structure and whether it can be expected to merge successfully when supplied as an input file to the MergePDFs method.

Parameters

Parameter	Description
<i>PDFInputFile</i>	Specify the full path name of the PDF file you want to validate. Forward or back slashes are used in the path according to the operating system of the application server or Process Scheduler server. That is, on Unix servers, the directory separator is a forward slash, while a Windows server requires a path with back slashes.
<i>Error</i>	If any errors occur during processing, this parameter is populated with the text of the error message.

Returns

A Boolean: true if the PDF file is validated successfully, false otherwise. If this method returns false, the Error parameter is populated with the text of the error message that occurred.

Example

```
import PSXP_ENGINE:PDFMerger;
```

```
Local PSXP_ENGINE:PDFMerger &oMerger = create PSXP_ENGINE:PDFMerger();
Local boolean &bResult;
Local string &sErr;
Local string &sInputFile = "c:\temp\PDF_input_files\file_to_be_merged.pdf";
&bResult = &oMerger.isPDFValid(&sInputFile, &sErr);

If Not &bResult Then
    WriteToLog(%ApplicationLogFence_Error, "File " | &sInputFile | " will not
merge successfully due to error: " | &sErr);
Else
    WriteToLog(%ApplicationLogFence_Error, "File " | &sInputFile | " will
merge successfully");
End-If;
```

MergePDFs method: PDFMerger class

Syntax

MergePDFs(*PDFFileArray*, *PDFOutputFile*, *Error*)

Description

Use the MergePDFs method to merge the specified PDF files into a single output file.

The order of the files specified in the array are the order in which the files are merged.

Parameters

Parameter	Description
<i>PDFFileArray</i>	Specify an already instantiated and populated array of string containing the names of the PDF files that you want to merge together.
<i>PDFOutputFile</i>	Specify the full path name of the file you want populated with the merged PDF file. Forward or back slashes are used in the path according to the operating system of the application server or process scheduler server. That is, on Unix servers, the directory separator is a forward slash, while a Windows server returns a path with back slashes.
<i>Error</i>	If any errors occur during processing, this parameter is populated with the text of the error message after processing.

Returns

A Boolean: true if the method completed successfully, false otherwise. If this method returns false, the *Error* parameter is populated with the text of the error message that occurred.

Example

```
Local PSXP_ENGINE:PDFMerger &oMerger;

&sErr = "";
```

```
&asNames = CreateArray(&sPdfFile1);  
&asNames.Push(&sPdfFile2);  
&bResult = &oMerger.mergePDFs(&asNames, &sOutputPdfFile, &sErr);
```

PDFMerger Class Properties

In this section, the PDFMerger class properties are presented in alphabetical order.

ConfProp property: PDFMerger class

Description

Use the ConfProp property to specify an already instantiated and populated Properties object that contains the configuration to be used for processing the document. This property enables you to accommodate different system configurations.

Related Topics

- [Properties Class](#)
This section provides an overview of the Properties class and discusses:

Locale property: PDFMerger class

Description

Use the Locale property to specify the locale for the processing. If no value is specified for this property, the default system locale will be used.

The locale is specified using a two character ISO language code and a two character ISO country code (LC-CC). When you don't need to reflect country specific formatting, the locale code is made up of just the language code.

This property is read/write.

PageNumber property: PDFMerger class

Description

Use this property to specify an already instantiated and populated PageNumber object to be used with the merged document.

This property is read/write.

Example

```
Local PSXP_ENGINE:PDFMerger &oMerger;  
Local PSXP_ENGINE:PageNumber &oPageNumber;  
  
&oMerger = create PSXP_ENGINE:PDFMerger();  
&oPageNumber = create PSXP_ENGINE:PageNumber();  
  
&oPageNumber.FontName = "Symbol";  
&oPageNumber.FontSize = 16;  
&oPageNumber.PositionX = 300;  
&oPageNumber.PositionY = 20;
```



```
&oMerger.oPageNumber = &oPageNumber;

&sErr = "";
&asNames = CreateArray(&sPdfFile1);
&asNames.Push(&sPdfFile2);
&bResult = &oMerger.mergePDFs(&asNames, &sOutputPdfFile, &sErr);
```

Related Topics

- [PageNumber Class](#)
This section provides an overview of the PageNumber class and discusses:

Watermark property: PDFMerger class

Description

Use this property to specify an already instantiated and populated Watermark object to be used with the merged object.

This property is read/write.

Example

```
Local PSXP_ENGINE:PDFMerger &oMerger;
Local PSXP_ENGINE:Watermark &oWatermark;

&oMerger = create PSXP_ENGINE:PDFMerger();
&oWatermark = create PSXP_ENGINE:Watermark();

&oWatermark.Text = "DEMO";
&oWatermark.TextStartPosX = 200;
&oWatermark.TextStartPosY = 400;
&oMerger.oWatermark = &oWatermark;

&sErr = "";
&asNames = CreateArray(&sPdfFile1);
&bResult = &oMerger.mergePDFs(&asNames, &sOutputPdfFile, &sErr);
```

Related Topics

- [Watermark Class](#)
This section provides an overview of the Watermark class and discusses:

Properties Class

This section provides an overview of the Properties class and discusses:

- Properties class constructor
- Properties class methods

Use the Properties class to specify the properties for setting up the processor configuration. This class is used with the PDFMerger class.

Related Topics

- [ConfProp property: PDFMerger class](#)

Properties Class Constructor

This section describes the constructor for the Properties class.

Properties method: Properties class

Syntax

```
Properties()
```

Description

Use the Properties constructor to instantiate a Properties object.

Parameters

None.

Returns

A Properties object.

Example

```
import PSXP_ENGINE:Properties;

Local PSXP_ENGINE:Properties &rProps = create PSXP_ENGINE:Properties();
```

Properties Class Methods

In this section, the Properties class methods are presented in alphabetical order.

GetProperty method: Properties class

Syntax

```
GetProperty(Name, OutValue)
```

Description

Use the GetProperty method to return the value of the specified property.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the property that you want to access the value.
<i>OutValue</i>	Specify a string to contain the value of the property you want to access.

Returns

A Boolean: true if the method completed successfully, false otherwise. If this method returns false, the *Error* parameter is populated with the text of the error message that occurred.

Example

```
Local PSXP_ENGINE:Properties &oProp;  
  
&oProp = create PSXP_ENGINE:Properties();  
%sValue = "";  
&bResult = &oProp.getProperty("pdf-security", %sValue);
```

SetProperty method: Properties class

Syntax

`SetProperty(Name, Value)`

Description

Use the SetProperty method to specify the value of the specified property.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the property that you want to set.
<i>Value</i>	Specify the value of the property that you want to set.

Returns

A Boolean: true if the method completed successfully, false otherwise. If this method returns false, the *Error* parameter is populated with the text of the error message that occurred.

Example

```
Local PSXP_ENGINE:Properties &oProp;  
  
&oProp = create PSXP_ENGINE:Properties();  
&bResult = &oProp.setProperty("pdf-security", "true");
```

Watermark Class

This section provides an overview of the Watermark class and discusses:

- Watermark class constructor
- Watermark class properties

Use the Watermark class to specify a watermark for a merged PDF file. Objects in this class are used with the Watermark property of the PDFMerger class. You can generate a watermark

either using text or an image. You can either use the text properties or the image properties. You cannot use both.

The following are the image properties of the Watermark class:

- ImageFile
- ImageLowerLeftX
- ImageLowerLeftY
- ImageUpperRightX
- ImageUpperRightY

The following are the text properties of the Watermark class:

- Text
- TextAngle
- TextFontName
- TextFontSize
- TextStartPosX
- TextStartPosY

Related Topics

- [Watermark property: PDFMerger class](#)

Watermark Class Constructor

This section describes the constructor for the Watermark class.

Watermark method: Watermark class

Syntax

```
Watermark()
```

Description

Use the Watermark constructor to instantiate a Watermark object.

Parameters

None.

Returns

A Watermark object.

Example

```
import PSXP_ENGINE:Watermark;

Local PSXP_ENGINE:Watermark &rProps = create PSXP_ENGINE:Watermark();
```

Watermark Class Properties

In this section, the Watermark class properties are presented in alphabetical order.

ImageFile property: Watermark class

Description

Use the ImageFile property to specify the full path name of an image file to be used for the watermark.

Forward or back slashes are used in the path according to the operating system of the application server or process scheduler server. That is, on Unix servers, the directory separator is a forward slash, while a Windows server returns a path with back slashes.

This property is read/write.

ImageFileLowerLeftX property: Watermark class

Description

Use the ImageFileLowerLeftX property to specify the lower left, X-axis position for the watermark, as a number.

This property is read/write.

ImageFileLowerLeftY property: Watermark class

Description

Use the ImageFileLowerLeftY property to specify the lower left, Y-axis position for the watermark, as a number.

This property is read/write.

ImageFileUpperRightX property: Watermark class

Description

Use the ImageFileUpperRightX property to specify the upper right, X-axis position for the watermark, as a number.

This property is read/write.

ImageFileUpperRightY property: Watermark class

Description

Use the ImageFileUpperRightY property to specify the upper right, Y-axis position for the watermark, as a number.

This property is read/write.

PageIndex property: Watermark class

Description

Use the PageIndex property to specify the page where the watermark begins. For example, you might not want a watermark to display on a cover page. The default value is 0, which sets the watermark on all pages (page index starts at 1.)

This property is read/write.

Text property: Watermark class

Description

Use the Text property to specify the text for the watermark, as a string.

This property is read/write.

TextAngle property: Watermark class

Description

Use the TextAngle property to specify the angle of the watermark text across the page. You must specify a number between 1 and 360.

This property is read/write.

TextFontName property: Watermark class

Description

Use the TextFontName property to specify the name of the font to be used for the text for the watermark.

This property is read/write.

TextFontSize property: Watermark class

Description

Use the TextFontSize property to specify the size of the text font. The default value is 8.

This property is read/write.

TextStartPosX property: Watermark class

Description

Use the TextStartPosX property to specify the starting position, X-axis location for the text to be used as the watermark.

This property is read/write.

TextStartPosY property: Watermark class

Description

Use the TextStartPosY property to specify the starting position, Y-axis location for the text to be used as the watermark.

This property is read/write.

Understanding the DigitalCertStore Class

The DigitalCertStore class defines the available methods that can be invoked by a custom implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class to retrieve digital certificates and passwords for PDF reports produced with BI Publisher for PeopleSoft. The DigitalCertStore class is also used internally by BI Publisher for PeopleSoft for similar purposes.

Related Topics

- [Understanding the IPDFSignature Interface Class](#)
If the signer of the report needs to be determined dynamically at report run time (for example, the signer is to be determined based on the report data), then a custom application class based on the IPT_PDFSIGNATURE_INT:IPDFSignature interface must be used. However, if the report signer and digital certificate are known at report design time, then the certificate ID (referred to as the digital ID or signature ID) can be specified in the psxp_signature_digitalID property in the report definition. In this case, there is no need to implement a custom application class.
- Security Administration: Using the External Digital Certificates Page
- BI Publisher for PeopleSoft: Understanding Digital Signature in BI Publisher Reports

DigitalCertStore Class Methods

The methods in this section are described in alphabetical order.

DigitalCertStore method: DigitalCertStore class

Syntax

```
DigitalCertStore()
```

Description

Use the DigitalCertStore constructor method to instantiate a DigitalCertStore object.

Parameters

None.

Returns

A DigitalCertStore object.

Example

Use the create built-in function to instantiate a DigitalCertStore object:

```
import PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore;

&oStore = create PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore();
```

ExtractCertificateByAuthorizedRole method: DigitalCertStore class

Syntax

```
ExtractCertificateByAuthorizedRole(digital_ID, auth_role, dest_location,  
&keystore_pwd)
```

Description

Use the ExtractCertificateByAuthorizedRole method to retrieve a digital certificate file to the specified location on the application server based on the specified digital ID and whether the current user has the specified role. This method also returns the encrypted password for the certificate file.

! Important

Do not use this method in an implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class. Oracle reserves the right to modify this method in the future.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>auth_role</i>	Specifies a role name as a string value.
<i>dest_location</i>	Specifies the absolute URL to store the certificate file on the application server as a string value.
& <i>keystore_pwd</i>	Specifies an already instantiated string variable to store the returned encrypted password.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
58	The digital ID, role name, or the destination location is invalid due to being specified as an empty string.

Numeric Value	Description
59	There is no certificate file or password available to the specified role name.
60	The role name is not authorized or cannot be found.
61	There was an error downloading the certificate file from the database.
79	The current user does not have the specified role.

ExtractCertificateByAuthorizedUser method: DigitalCertStore class

Syntax

```
ExtractCertificateByAuthorizedUser(digital_ID, auth_user, dest_location,  
&keystore_pwd)
```

Description

Use the ExtractCertificateByAuthorizedUser method to retrieve a digital certificate file to the specified location on the application server based on the specified digital ID and whether the current user is the specified user. This method also returns the encrypted password for the certificate file.

Important

Do not use this method in an implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class. Oracle reserves the right to modify this method in the future.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>auth_user</i>	Specifies a user ID as a string value.
<i>dest_location</i>	Specifies the absolute URL to store the certificate file on the application server as a string value.
& <i>keystore_pwd</i>	Specifies an already instantiated string variable to store the returned encrypted password.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
54	The digital ID, user ID, or the destination location is invalid due to being specified as an empty string.
55	There is no certificate file or password available to the specified user ID.
56	The specified user ID is not authorized or cannot be found.
57	There was an error downloading the certificate file from the database.
78	The specified user ID is not the current user.

ExtractCertificateByDigitalID method: DigitalCertStore class

Syntax

```
ExtractCertificateByDigitalID(digital_ID, dest_location, &keystore_pwd)
```

Description

Use the ExtractCertificateByDigitalID method to retrieve a digital certificate file to the specified location on the application server based on the specified digital ID. This method also returns the encrypted password for the certificate file.

Important

Do not use this method in an implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class. Oracle reserves the right to modify this method in the future.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>dest_location</i>	Specifies the absolute URL to store the certificate file on the application server as a string value.
<i>&keystore_pwd</i>	Specifies an already instantiated string variable to store the returned encrypted password.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
50	The digital ID or the destination location is invalid due to being specified as an empty string.
51	There is no certificate file or password for the specified digital ID
52	The digital ID is inactive or cannot be found.
53	There was an error downloading the certificate file from the database.
56	The specified user ID is not authorized or cannot be found.
79	The current user does not have the specified role.

Example

```
&errCode = &oStore.ExtractCertificateByDigitalID(&digitalID,  
&sOutDestination, &psw);  
&keystorePswd = &psw;  
  
If &errCode > 0 Then  
    &m_sError = &oStore.ErrorMessageDetail;  
End-If;
```

getDigitalCertFileNameByDigitalID method: DigitalCertStore class

Syntax

```
getDigitalCertFileNameByDigitalID(digital_ID, &file_name)
```

Description

Use the getDigitalCertFileNameByDigitalID method to return the name of the digital certificate file based on the specified digital ID.

! Important

Do not use this method in an implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class. Oracle reserves the right to modify this method in the future.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.

Parameter	Description
<i>&file_name</i>	Specifies an already instantiated string variable to store the returned certificate file name.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
65	The digital ID was specified as the empty string.
70	No file name is defined for this digital ID.

Example

```
&errCode = &oStore.getDigitalCertFileNameByDigitalID(&digitalID, &tmpStr);  
If &errCode > 0 Then /* failure */  
    &m_sError = &oStore.ErrorMessageDetail;  
Else /* success */  
    ...  
End-If;
```

getDigitalIdBySigner method: DigitalCertStore class

Syntax

```
getDigitalIdBySigner(signer, &array_digitalIDs)
```

Description

Use the getDigitalIdBySigner method to return a list of digital IDs that are available to the specified signer.

Parameters

Parameter	Description
<i>signer</i>	Specifies the ID of the signer as a string value.
<i>&array_digitalIDs</i>	Specifies an already instantiated array of string to store the returned list of digital IDs.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
62	The signer was specified as the empty string.
63	No digital IDs are defined for this signer.

getEncPassword method: DigitalCertStore class

Syntax

```
getEncPassword(digital_ID, &keystore_pwd )
```

Description

Use the getEncPassword method to return the encrypted password for the specified digital ID.

! Important

Do not use this method in an implementation of the IPT_PDFSIGNATURE_INT:IPDFSignature interface class. Oracle reserves the right to modify this method in the future.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID of the certificate as a string value.
<i>&keystore_pwd</i>	Specifies an already instantiated string variable to store the returned encrypted password.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
65	The digital ID was specified as the empty string.
73	No password is defined for this digital ID.

getListOfAuthorizedRoleNames method: DigitalCertStore class

Syntax

```
getListOfAuthorizedRoleNames(digital_ID, &array_auth_roles)
```

Description

Use the getListOfAuthorizedRoleNames method to return the list of authorized roles for the specified digital ID.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>&array_auth_roles</i>	Specifies an already instantiated array of string to store the returned list of authorized roles names.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
65	The digital ID was specified as the empty string.
68	No authorized roles are defined for this digital ID.
69	The method executed successfully. There are <i>n</i> authorized roles for the specified digital ID.

getListOfAuthorizedUsers method: DigitalCertStore class

Syntax

```
getListOfAuthorizedUsers(digital_ID, &array_auth_users)
```

Description

Use the getListOfAuthorizedUsers method to return the list of authorized users for the specified digital ID.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>&array_auth_users</i>	Specifies an already instantiated array of string to store the returned list of authorized user IDs.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
65	The digital ID was specified as the empty string.

Numeric Value	Description
66	No authorized users are defined for this digital ID.
67	The method executed successfully. There are <i>n</i> authorized users for the specified digital ID.

getListOfDigitalId method: DigitalCertStore class

Syntax

```
getListOfDigitalId(&array_digitalIDs)
```

Description

Use the getListOfDigitalId method to return the list of all digital IDs defined in the certification store.

Parameters

Parameter	Description
<i>&array_digitalIDs</i>	Specifies an already instantiated array of string to store the returned list of digital IDs.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
64	No digital IDs are defined in the certification store.

Example

```
&arrIds = CreateArrayRept("", 0);  
&errCode = &secStore.getListOfDigitalId(&arrIds);
```

getListOfSigner method: DigitalCertStore class

Syntax

```
getListOfSigner(&array_signers)
```

Description

Use the getListOfSigner method to return the list of all signers defined in the certification store.

Parameters

Parameter	Description
<i>&array_signers</i>	Specifies an already instantiated array of string to store the returned list of signers.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
72	No signers are defined in the certification store.

getSignerByDigitalId method: DigitalCertStore class

Syntax

```
getSignerByDigitalId(digital_ID, &signer)
```

Description

Use the getSignerByDigitalId method to return the ID of the signer for the specified digital ID.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID for the certificate as a string value.
<i>&signer</i>	Specifies an already instantiated string variable to store the returned signer's ID.

Returns

A return code as a numeric value:

Numeric Value	Description
0	The method executed successfully.
65	The digital ID was specified as the empty string.
71	No signer is defined for this digital ID.

isDigitalCertValid method: DigitalCertStore class

Syntax

```
isDigitalCertValid(digital_ID)
```


Description

Use the `isDigitalCertValid` to determine whether the digital ID is valid.

Parameters

Parameter	Description
<i>digital_ID</i>	Specifies the digital ID as a string value.

Returns

A Boolean value.

DigitalCertStore Class Properties

The properties in this section are described in alphabetical order.

ErrorMessageDetail property: DigitalCertStore class

Description

Use this property to return the detailed error message as a string.

Note

This property is effectively read-only.

ErrorMessageSet property: DigitalCertStore class

Description

Use this property to return the defined message set number as a number value. This property should always return the value: 136.

Note

This property is effectively read-only.

Understanding the IPDFSignature Interface Class

If the signer of the report needs to be determined dynamically at report run time (for example, the signer is to be determined based on the report data), then a custom application class based on the `IPT_PDFSIGNATURE_INT:IPDFSignature` interface must be used. However, if the report signer and digital certificate are known at report design time, then the certificate ID (referred to as the digital ID or signature ID) can be specified in the `psxp_signature_digitalID` property in the report definition. In this case, there is no need to implement a custom application class.

Consider these situations when determining whether to create a custom implementation of the `IPT_PDFSIGNATURE_INT:IPDFSignature` interface class:

- If the `psxp_signature_digitalID` property has a value, BI Publisher for PeopleSoft can use this value as the digital ID; therefore, you do not need to implement a custom application class.
- If a digital signature will be applied to the PDF report and the `psxp_signature_digitalID` property has no value, you must specify a custom implementation of the `IPT_PDFSIGNATURE_INT:IPDFSignature` interface class in the `psxp_signature_appclass` property.
- If you specify a value for both `psxp_signature_digitalID` and `psxp_signature_appclass`, the value of `psxp_signature_digitalID` is ignored and your application class will be used to determine the digital ID.

When you create an implementation of the `IPT_PDFSIGNATURE_INT:IPDFSignature` interface, you need your application class to return which digital ID is to be used for signing a specific report. When you implement this interface:

1. You must not set any of the four properties that are set for you by BI Publisher for PeopleSoft. These are: `OperatorId`, `ProcessInstance`, `ReportId`, and `secStore`.
2. In addition, you must not set two other properties that BI Publisher for PeopleSoft may set for you: `KeyFieldNames` and `KeyFieldValues`.

Those properties are populated from XML report file data as arrays of string when the report's `psxp_signature_mapfields` property has a value. Use those arrays to determine the signer for the specified report or report instance. In the case of a bursted report with a different signer for each instance, BI Publisher for PeopleSoft will call your application class separately for each report instance with these properties set to values specific to the report instance.

3. You must complete implementations of the interface's two abstract methods:
 - Implement `getSignatureId` to return the digital ID for the certificate that is to be used to sign a specific report.
See [getSignatureId method: IPDFSignature class](#) for an example implementation.
 - Implement `getErrorString` to return a detailed error message to BI Publisher for PeopleSoft.
See [getErrorString method: IPDFSignature class](#) for more information and an example.
4. You must provide a value for the `UseSameSignatureForBursting` read-only property to indicate whether to use the same signer for bursted instances of this report.
See [UseSameSignatureForBursting property: IPDFSignature class](#) for an example of a technique to implement this.
5. You must provide the full path to your application class by specifying the `psxp_signature_appclass` property on the Global Properties page—for example:

`MY_CUSTOM_PACKAGE:MY_SignedPDF`

Important

If both the `psxp_signature_appclass` property and the `psxp_signature_digitalID` property are set, the `psxp_signature_digitalID` property is ignored.

The following example shows just the class definition block of an example implementation of an application class named `My_SignedPDF`:

```
class My_SignedPDF implements IPT_PDFSIGNATURE_INT:IPDFSignature
    /* inputs */
    property string ReportId; /* report Id that requires digital signature */
    property string OperatorId; /* operator ID who runs a report */
    property number ProcessInstance; /* Process Scheduler Process Instance */
    property array of string KeyFieldNames; /* an array of field names that
contain key data */
    property array of string KeyFieldValues; /* an array of field values that
contain key data */
    property PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore secStore; /*
Security App class used to get Digital Certificates info from Security
storage */
    /* outputs */
    property boolean UseSameSignatureForBursting get; /* If true the same
signature will be reused for all bursted instances */
    method My_SignedPDF(); /* Constructor */
    method getSignatureId() Returns string; /* Signature Authority ID to be
used for signing a report */
    method getErrorString() Returns string; /* An error string, if any */
private
    instance string &m_errorStr;
    instance number &m_ErrorMessageSet;
    instance Boolean &mb_ReuseSignature;
end-class;
```

Related Topics

- BI Publisher for PeopleSoft: Defining Global Properties
- Security Administration: Understanding Applying Digital Signatures to PDF Report Output

IPDFSignature Class Methods

The methods in this section are described in alphabetical order.

getErrorString method: IPDFSignature class

Syntax

```
getErrorString()
```

Description

Implement the `getErrorString` method to return a detailed error message to BI Publisher for PeopleSoft. A detailed error message can be internal to your implementation of the `getSignatureId` method or one that is passed back from an invocation of a `PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore` method.

Note

This is an abstract method.

Parameters

None.

Returns

A String value.

Example

During execution of the `getSignatureId` method, the `&m_errorStr` instance variable is set to the message catalog entry corresponding to any error returned from invocations of `DigitalCertStore` methods. For example:

```
If ... Then
    &m_errorStr = MsgGet(&m_ErrorMessageSet, 64, "### Not able to retrieve a
list of digital IDs.");
End-If;
```

Then, this `&m_errorStr` instance variable is set as the return value for the `getErrorString` method:

```
method getErrorString
    /+ Returns String +/
    /+ Extends/implements IPT_PDFSIGNATURE_INT:IPDFSignature.getErrorString +/
    Return &m_errorStr;
end-method;
```

Related Topics

- [ErrorMessageSet property: DigitalCertStore class](#)
- [ErrorMessageDetail property: DigitalCertStore class](#)

getSignatureId method: IPDFSignature class

Syntax

```
getSignatureId()
```

Description

Implement the `getSignatureId` method to return the digital ID for the certificate that is to be used to sign a specific report. In this context, the certificate's digital ID is also referred to as the *signature ID*.

Note

This is an abstract method.

Use the six input properties set by BI Publisher for PeopleSoft to determine who is the signer of the specific report instance. In particular, the `KeyFieldNames` and `KeyFieldValues` arrays contain values that pertain to the specific report instance. Use methods of `PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore` (accessed through the `secStore` property) to obtain information on certificates, signers, digital IDs, and authorized users defined in the certification store.

For example, use the following methods to determine digital IDs and signers:

- `getDigitalIdBySigner`
- `getListOfDigitalId`
- `getListOfSigner`

Use the `OperatorId` property and the following methods to determine whether the current user (the operator) is authorized to produce a report signed by this signer:

- `getListOfAuthorizedUsers`
- `getListOfAuthorizedRoleNames`

Finally, use the `isDigitalCertValid` method to determine whether a specific certificate in the certification store is valid.

Parameters

None.

Returns

A String value.

Example

The following example implementation is incomplete in that it does not include the application logic that would determine the actual report signer, the digital IDs that can be used by that signer, or which of those digital IDs to use to sign this report. These determinations depend on specific business rules and requirements. However, once the signer and a digital ID are determined, this example invokes the `getListOfDigitalId` method to determine whether the specified digital ID exists in the certification store. If that check is successful, then this digital ID is returned as the ID for the certificate to be used to sign the report.

```
method getSignatureId
    /* Returns String */
    /* Extends/implements IPT_PDFSIGNATURE_INT:IPDFSignature.getSignatureId */
    /*
    /* DigitalCertStore instance (&secStore) is provided by BI Publisher, so
    this part is not required */
    If &secStore = Null Then
        &secStore = create PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore();
        If &secStore = Null Then
            &m_errorStr = "Cannot create an instance of
PT_SECURITY_DIGITALCERTSTORE:DigitalCertStore.";
```

```

        Return "";
    End-If;
End-If;
&m_ErrorMessageSet = &secStore.ErrorMessageSet;
Local string &psw, &digitalID, &retrievedID, &sOutDestination, &certPath;
Local array of string &arrIds;
Local number &errCode, &i;
&digitalID = "";
/* Insert the application logic to determine the report signer and his or
her */
/* certificate IDs (digital IDs) here. For this example, the signer is
assumed */
/* to be Joe Doe, and the digital ID retrieved for this user is
"JoeDoe". */

&retrievedID = "JoeDoe";

/* Determine whether this digital ID is in the digital certification
store. */
&arrIds = CreateArrayRept("", 0);
&errCode = &secStore.getListOfDigitalId(&arrIds);
If &errCode > 0 Then
    &m_errorStr = &secStore.ErrorMessageDetail;
    Return "";
End-If;

If &arrIds.Len = 0 Then
    &m_errorStr = MsgGet(&m_ErrorMessageSet, 64, "### Not able to retrieve
a list of digital IDs.");
    Return "";
End-If;

For &i = 1 To &arrIds.Len
    If &arrIds [&i] = &retrievedID Then
        &digitalID = &retrievedID;
        Return &digitalID;
    End-If;
End-For;

&m_errorStr = MsgGet(&m_ErrorMessageSet, 71, "### Not able to retrieve
signer for this digital ID", &retrievedID);
Return "";
end-method;

```

Related Topics

- [DigitalCertStore Class Methods](#)
The methods in this section are described in alphabetical order.
- [IPDFSignature Class Properties](#)
The properties in this section are described in alphabetical order.

IPDFSignature Class Properties

The properties in this section are described in alphabetical order.

KeyFieldNames property: IPDFSignature class

Description

Use this property to retrieve an array of string representing key field names to be used to determine the signing authority for the report. These key field names are set by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

Example

```
For &i = 1 To &KeyFieldNames.Len
    WriteToLog(%ApplicationLogFence_Level1, "&KeyFieldNames[ " | String(&i) |
    "]: " | &KeyFieldNames [&i]);
End-For;
For &i = 1 To &KeyFieldValues.Len
    WriteToLog(%ApplicationLogFence_Level1, "&KeyFieldValues[ " | String(&i) |
    "]: " | &KeyFieldValues [&i]);
End-For;
```

KeyFieldValues property: IPDFSignature class

Description

Use this property to retrieve an array of string representing key field values to be used to determine the signing authority for the report. These key field values are set by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

Example

```
For &i = 1 To &KeyFieldNames.Len
    WriteToLog(%ApplicationLogFence_Level1, "&KeyFieldNames[ " | String(&i) |
    "]: " | &KeyFieldNames [&i]);
End-For;
For &i = 1 To &KeyFieldValues.Len
    WriteToLog(%ApplicationLogFence_Level1, "&KeyFieldValues[ " | String(&i) |
    "]: " | &KeyFieldValues [&i]);
End-For;
```

OperatorId property: IPDFSignature class

Description

Use this property to retrieve a string representing the current user ID as set by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

ProcessInstance property: IPDFSignature class

Description

Use this property to retrieve a number representing the process ID as set by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

ReportId property: IPDFSignature class

Description

Use this property to retrieve a string representing the report ID as set by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

secStore property: IPDFSignature class

Description

Use this property to retrieve the DigitalCertStore object instantiated by BI Publisher for PeopleSoft.

Note

This property is effectively read-only.

UseSameSignatureForBursting property: IPDFSignature class

Description

Use this property to return a Boolean value indicating whether to use the same signature if this is a bursted report.

! Important

This property has been identified as one of the values to be output by your implementation of the interface. However, the property is also defined as read-only, and therefore cannot be set or assigned directly. See the following code excerpt on how to set the value of a private instance variable to be returned as the value of this property.

Example

UseSameSignatureForBursting is defined as read-only, and therefor cannot be set directly. However, as demonstrated in the following code excerpt, you can define a private instance variable. In the following example, &mb_ReuseSignature is set to True or False as needed within the application logic. Then, a get definition is used to return the value of &mb_ReuseSignature as the value for the UseSameSignatureForBursting property.

```
class My_SignedPDF implements IPT_PDFSIGNATURE_INT:IPDFSignature
...

    property boolean UseSameSignatureForBursting get; /* If true the same
signature will be reused for all bursted instances */
...

private
...

    instance Boolean &mb_ReuseSignature;
end-class;
...

/***** Application logic *****/
Rem if signer is the same for all bursted instances;
If <some_condition> Then
    &mb_ReuseSignature = True;
Else
    Rem if signer is different and depends on some bursted reports values;
    &mb_ReuseSignature = False;
End-If;
/***** Application logic *****/
...

get UseSameSignatureForBursting
    /* Returns Boolean */
    /* Extends/implements
IPT_PDFSIGNATURE_INT:IPDFSignature.UseSameSignatureForBursting */
```

```

    Return &mb_ReuseSignature;
end-get;

```

Understanding the BIP_EMAIL_DATA Interface Class

There may be situations where you want to distribute reports using email to recipients that do not have PeopleSoft user profiles. PeopleTools enables you to distribute bursted and non-burstured BI Publisher reports to external users whose email addresses are stored in the database, file server, or another location.

You create an implementation of the IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA interface class to retrieve the stored distribution lists. Then, your implemented application class is specified in the psxp_ext_email_appclass property of the report definition.

When you create an implementation of the IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA interface, you need your application class to return an array of email addresses. When you implement this interface:

1. You must not set any of the three properties that are set for you by BI Publisher for PeopleSoft. These are: ReportName, BurstFieldName, and BurstFieldValue.
2. Implement the BIP_EMAIL_DATA constructor method to initialize the error message set to your custom implementation.

See [BIP_EMAIL_DATA method: BIP_EMAIL_DATA class](#) for an example implementation.

3. You must complete implementations of the interface's two abstract methods:
 - Implement getEmailAddressArray to return the array of external email addresses.
See [getEmailAddressArray method: BIP_EMAIL_DATA class](#) for an example implementation.
 - Implement getErrorString to return a detailed error message to BI Publisher for PeopleSoft.

See [getErrorString method: BIP_EMAIL_DATA class](#) for more information and an example.

4. You must provide the full path to your application class by specifying the psxp_ext_email_appclass property on the Global Properties page—for example:

```
MY_CUSTOM_PACKAGE:MY_BIP_EMAIL_DATA
```

The following example shows just the class definition block of an example implementation of an application class named MY_BIP_EMAIL_DATA:

```

import IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA;

class MY_BIP_EMAIL_DATA implements IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA
/* inputs */
property string ReportName; /* Report Name */
property string BurstFieldName; /* burst field name */
property string BurstFieldValue; /* burst field value */
/* outputs */
method MY_BIP_EMAIL_DATA(); /*Class constructor */
method getEmailAddressArray() Returns array of string; /* String array of
email recipient addresses */
method getErrorString() Returns string; /* An error string, if any */

```

```
private
    /* those instance variables could be used for data retrieval and
validation */
    instance string &m_errorStr;
    instance number &m_ErrorMessageSet;
end-class;
```

Related Topics

- BI Publisher for PeopleSoft: Defining Global Properties
- BI Publisher for PeopleSoft: Emailing BI Publisher Reports to External Users

BIP_EMAIL_DATA Class Methods

The methods in this section are described in alphabetical order.

Related Topics

- [Understanding the BIP_EMAIL_DATA Interface Class](#)
There may be situations where you want to distribute reports using email to recipients that do not have PeopleSoft user profiles. PeopleTools enables you to distribute bursted and non-bursted BI Publisher reports to external users whose email addresses are stored in the database, file server, or another location.

BIP_EMAIL_DATA method: BIP_EMAIL_DATA class

Syntax

```
BIP_EMAIL_DATA()
```

Description

Implement the BIP_EMAIL_DATA class constructor to initialize the BIP_EMAIL_DATA object with a custom message set number.

Parameters

None.

Returns

None.

Example

```
method BIP_EMAIL_DATA
    &m_errorStr = "";
    &m_ErrorMessageSet = 235;
end-method;
```

getEmailAddressArray method: BIP_EMAIL_DATA class

Syntax

```
getEmailAddressArray()
```

Description

Implement the getEmailAddressArray method return an array of external email addresses to BI Publisher for PeopleSoft.

Note

This is an abstract method.

Parameters

None.

Returns

An array of String.

Example

In the following example, DEPTID is used as the burst field. The email addresses corresponding to the specified DEPTID burst value are retrieved from the PS_EMPL_MD_EMAIL table and returned in the array.

```
method getEmailAddressArray
    /* Returns Array of String */
    /* Extends/implements
IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA.getEmailAddressArray */
    Local array of string &aEmailAddressArray = CreateArrayRept("", 0);
    Local string &sql;
    Local string &sEmail;
    Local string &sDeptId;
    Local SQL &SQLObj;
    Local number &i;
    If &ReportName = "" Or
        &ReportName = " " Then
        &m_errorStr = "No Report Name is specified";
        Return Null;
    End-If;
    try
        Evaluate Upper(LTrim(RTrim(&ReportName)))
        When "CQ_EMAILS_MD"
        When "CQEMAILNB_MD"
        When-Other
            &m_errorStr = "Incorrect user email data application class is used
for the report - " | &ReportName;
            Return Null;
        End-Evaluate;
```

```

        If &BurstFieldName <> "" Then
            WriteToLog(%ApplicationLogFence_Level1, "App Plugin -
BurstFieldName: " | &BurstFieldName);
            WriteToLog(%ApplicationLogFence_Level1, "App Plugin -
BurstFieldValue: " | &BurstFieldValue);
        End-If;
        If &BurstFieldName <> "" Then
            If Not (Upper(&BurstFieldName) = "DEPTID" Or
                Upper(&BurstFieldName) = "A.DEPTID") Then
                &m_errorStr = "&BurstFieldName is not equal to DEPTID (A.DEPTID)";
                Return Null;
            End-If;
        End-If;
        &sDeptId = &BurstFieldValue;
        If &BurstFieldName <> "" Then
            &sql = "SELECT A.EMAILID FROM PS_EMPL_MD_EMAIL A WHERE A.EFFDT =
( SELECT MAX(B.EFFDT) FROM PS_EMPL_MD_EMAIL B WHERE A.EMPLID = B.EMPLID AND
A.DEPTID = B.DEPTID AND B.EFFDT <=%CurrentDateIn) AND A.DEPTID = '" |
&sDeptId | "'";
        Else
            &sql = "SELECT A.EMAILID FROM PS_EMPL_MD_EMAIL A WHERE A.EFFDT =
( SELECT MAX(B.EFFDT) FROM PS_EMPL_MD_EMAIL B WHERE A.EMPLID = B.EMPLID AND
A.DEPTID = B.DEPTID AND B.EFFDT <=%CurrentDateIn)";
        End-If;
        &SQLObj = CreateSQL();
        &SQLObj.Open(&sql);
        &SQLObj.ReuseCursor = True;
        While &SQLObj.Fetch(&sEmail)
            If All(&sEmail) Then
                &aEmailAddressArray.Push(&sEmail);
            End-If;
        End-While;
        If &SQLObj.IsOpen Then
            &SQLObj.Close();
        End-If;
        Return &aEmailAddressArray;
    catch Exception &Err
        Local string &sSub1, &sSub2, &sSub3, &sSub4, &sSub5;
        Evaluate &Err.SubstitutionCount
        When > 4
            &sSub5 = &Err.GetSubstitution(5);
        When > 3
            &sSub4 = &Err.GetSubstitution(4);
        When > 2
            &sSub3 = &Err.GetSubstitution(3);
        When > 1
            &sSub2 = &Err.GetSubstitution(2);
        When > 0
            &sSub1 = &Err.GetSubstitution(1);
        End-Evaluate;
        &m_errorStr = MsgGet(&Err.MessageSetNumber, &Err.MessageNumber,
&Err.ToString(), &sSub1, &sSub2, &sSub3, &sSub4, &sSub5);
        Return Null;
    end-try;
end-method;

```

getErrorString method: BIP_EMAIL_DATA class

Syntax

```
getErrorString()
```

Description

Implement the `getErrorString` method to return a detailed error message to BI Publisher for PeopleSoft. The detailed error message should be internal to your implementation of the `getEmailAddressArray` method.

Note

This is an abstract method.

Parameters

None.

Returns

A String value.

Example

During execution of the `getEmailAddressArray` method, the `&m_errorStr` instance variable is set to a literal string in some cases or to the message catalog entry. For example:

```
&m_errorStr = MsgGet(&Err.MessageSetNumber, &Err.MessageNumber,  
&Err.ToString(), &sSub1, &sSub2, &sSub3, &sSub4, &sSub5);
```

Then, this `&m_errorStr` instance variable is set as the return value for the `getErrorString` method:

```
method getErrorString  
    /+ Returns String +/  
    /+ Extends/implements IPT_BIP_EXT_EMAIL_INT:BIP_EMAIL_DATA.getErrorString  
    +/  
    Return &m_errorStr;  
end-method;
```

BIP_EMAIL_DATA Class Properties

The properties in this section are described in alphabetical order.

Related Topics

- [Understanding the BIP_EMAIL_DATA Interface Class](#)
There may be situations where you want to distribute reports using email to recipients that do not have PeopleSoft user profiles. PeopleTools enables you to distribute bursted and

non-burst BI Publisher reports to external users whose email addresses are stored in the database, file server, or another location.

BurstFieldName property: BIP_EMAIL_DATA class

Description

Use this property to retrieve a string set by BI Publisher for PeopleSoft representing the name of the burst field used to generate the report.

① Note

This property is effectively read-only.

BurstFieldValue property: BIP_EMAIL_DATA class

Description

Use this property to retrieve a string set by BI Publisher for PeopleSoft representing the burst value used to generate the report.

① Note

This property is effectively read-only.

ReportName property: BIP_EMAIL_DATA class

Description

Use this property to retrieve a string representing the report ID as set by BI Publisher for PeopleSoft.

① Note

This property is effectively read-only.

BI Publisher Classes Example

The following example provides a complete example of the code first, then goes through the program line by line.

Generating and Publishing a Report

In the following example, a report is created from an existing report definition. It is populated with an already instantiated and populated XmlDocument object, then published.

The following is the complete code sample: the steps explain each line.

```
import PSXP_RPTDEFNMANAGER:ReportDefn;

Local string &sFileName = "c:\path\filename.xml";
Local string &rptDefnId = "Financial";
Local string &LanguageCode = "ENG";
Local date &effdt = Date(20090821);
Local string &outputfmt = "HTM";

Local string &folderName = "General";
Local string &serverName = "PSNT";
Local PSXP_RPTDEFNMANAGER:ReportDefn &rptDefn;

&rptDefn = create PSXP_RPTDEFNMANAGER:ReportDefn(&rptDefnId);
&rptDefn.Get();
&rptDefn.SetRuntimeDataXMLFile(&sFileName);
&rptDefn.ProcessReport("", &languageCd, &effdt, &outputfmt);

&rptDefn.Publish(&serverName, "", &folderName, &PID);
```

To generate and publish a report:

1. Import the appropriate application class.

Because this program generates and publishes a report, you need to import the report manager definition class.

```
import PSXP_RPTDEFNMANAGER:ReportDefn;
```

2. Initialize variables.

The variable declaration strings not only specify values for the variables, but give them type and scope as well. This can be very useful when debugging.

```
Local string &sFileName = "c:\path\filename.xml";
Local string &rptDefnId = "Financial";
Local string &LanguageCode = "ENG";
Local date &effdt = Date(20090821);
Local string &outputfmt = "HTM";

Local string &folderName = "General";
Local string &serverName = "PSNT";
Local PSXP_RPTDEFNMANAGER:ReportDefn &rptDefn;
```

3. Instantiate the report definition object and initialize it.

After you instantiate a report definition object, you must initialize it and populate it using the Get method.

```
&rptDefn = create PSXP_RPTDEFNMANAGER:ReportDefn(&rptDefnId);
&rptDefn.Get();
```

4. Specify the data for the report.

This report uses an XML file as the data source, so you must specify the runtime data source for the report before you process it.

```
&rptDefn.SetRuntimeDataXMLFile(&sFileName);
```

5. Process the report.

You must process the report, generate a version of it for the report repository, before you can distribute the report.

```
&rptDefn.ProcessReport("", &languageCd, &effdt, &outputfmt);
```

6. Publish the report.

After you've generated the report, you may want to publish it to another location.

```
&rptDefn.Publish(&serverName, "", &folderName, &PID);
```

Business Interlink Class

Understanding Business Interlink Class

The PeopleSoft Business Interlink framework provides a gateway for PeopleSoft applications to the services of any external system. This framework enables any PeopleSoft component (that is, a page, an Application Engine program, and so on) to integrate with any external system in near real-time and batch modes.

This framework enables a PeopleCode program to map the input and outputs of a Business Interlink definition to PeopleCode variables and record fields, then, using an Interlink object, call the Interlink plug-in, which in turn calls the external system, passes the information to the external system, and returns values to the PeopleCode program.

This documentation describes only the Interlink object portion of the PeopleSoft Business Interlink framework.

Each Interlink object is based on a Business Interlink definition, which is created in Application Designer. An Interlink object can be based on only a single Business Interlink definition.

Note

PeopleSoft Business Interlinks is a desupported product. The Business Interlinks class currently exists for backward compatibility only. For new integrations, use Integration Broker instead.

Related Topics

- [Understanding Message Classes](#)
You can create the following types of messages using PeopleSoft Pure Internet Architecture::

Using the Interlink Object

After you instantiate an Interlink object, use the Interlink object to:

- Populate the input buffer
- Send the data to the Interlink plug-in (by using the Execute method)
- Fetch the outputs from the buffer
- Check for status and error messages

After the Business Interlink object is instantiated, you can assign values from constants, PeopleSoft variables, or record fields to the inputs of that Business Interlink object.

When you execute the Business Interlink object, it loads the appropriate Business Interlink Plug-in and passes itself to that Business Interlink Plug-in. The Business Interlink Plug-in processes the input data, passing the input values of the Business Interlink object to the

external system and then fills the output values of the Business Interlink object (if there are outputs).

Deciding Which Methods to Use

After you create your Business Interlink definition, you must use PeopleCode to instantiate an Interlink object and execute the Business Interlink plug-in. This PeopleCode can be long and complex. Rather than write it directly, you can drag and drop the Business Interlink definition from the Application Designer Project View into an open PeopleCode edit pane. Application Designer analyzes the definition and generates initial PeopleCode as a template, which you can modify.

Related Topics

- [Understanding Business Interlink Class](#)
The PeopleSoft Business Interlink framework provides a gateway for PeopleSoft applications to the services of any external system. This framework enables any PeopleSoft component (that is, a page, an Application Engine program, and so on) to integrate with any external system in near real-time and batch modes.

Executing the Business Interlink Object

In most cases, you must use the Execute method to execute the Business Interlink object. However, for bulk input, you can use the BulkExecute method instead.

The Execute and BulkExecute methods return a value you can use for status and error checking.

Supporting Batch Input and Output

The methods discussed in this section, except for BulkExecute, add input values to the Business Interlink object one set, or row, at a time. The call to the Business Interlink Plug-in occurs only once. All the input data is passed with the single Execute. All output is returned as batch as well. The methods then get the output values one set, or row, at a time.

If you're sending a large amount of data to the input buffers, instead of adding one input row at a time, you might write the data to a staging table, then use the BulkExecute method. This method automatically executes; that is, you don't have to use the Execute method. It also automatically fills the output record specified with the method with all the output values in every row in the output buffer if you've specified an output record.

Supporting Rowsets

If your data is mapped into rowsets, you may want to use the InputRowset method. This method takes a standard rowset object to populate the inputs for the Business Interlink object. You can use the FetchIntoRowset method to repopulate the rowset with new data.

Using the Flat Table Methods

If your data is in a flat table structure, you can use the flat table methods. AddInputRow adds rows of input to the Business Interlink object; FetchNextRow fetches rows of output from the Business Interlink object.

Supporting Dynamic Output

A Business Interlink can have dynamic output, meaning that the outputs for a Business Interlink object are changeable in data type or number of outputs.

Business Interlinks supplies a set of methods to support dynamic output. These methods enable you to interrogate the output buffer programmatically to determine the number of fields (columns), their types, and their values.

The following methods support dynamic output:

- `GetFieldCount`
- `GetFieldType`
- `GetFieldValue`
- `MoveFirst`
- `MoveNext`

Use the `MoveFirst` method to move to the first column, first row of the output buffer, and within a loop, use the `MoveNext` method to move to each row on the output buffer.

Within a `MoveFirst` (or `MoveNext`) loop, use the `GetFieldCount` method to get the number of columns in the output buffer, which is also the number of outputs for this Business Interlink object. Then you can extract the outputs from the buffer in a loop.

Within the `GetFieldCount` loop, use `GetFieldName` to get the name of the output, `GetFieldValue` to get the value of the output (which will be returned as a string), and `GetFieldType` to get the type of the output (if the output is not a string type, you will convert it to this type).

See [GetFieldCount method: Business Interlink class](#), [GetFieldType method: Business Interlink class](#), [GetFieldValue method: Business Interlink class](#), [MoveFirst method: Business Interlink class](#), [MoveNext method: Business Interlink class](#).


Using Hierarchical Data (BIDocs)

A Business Interlink can have hierarchical data. Think of the structure as a tree, with a root doc, node docs, and values. The hierarchical data methods and objects are also referred to as BIDocs.

Input Structures

The following shows an example of an input structure:

This example illustrates the fields and controls on the Example input structure. You can find definitions for the fields and controls later on this page.

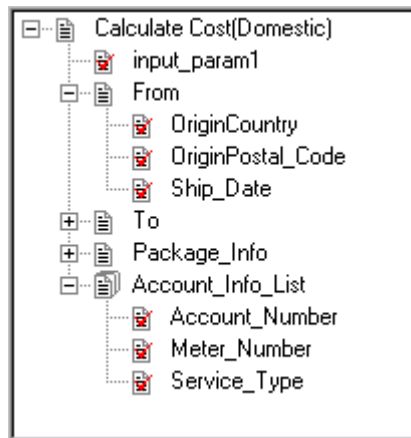

The *root doc* is Calculate Cost(Domestic). A root doc can contain both values and node docs.

The *node docs* are From, To, Package_Info and Account_Info_List. Each node can contain both values and child nodes. Node docs can be further described as either:

- *Simple node docs* have only one set of values for a single instance of a root doc. From, To, Package_Info are all simple node docs.
- *List node docs* can contain more than one set of values for a single instance of a root doc. Account_Info_List is a list node doc.

The values in the From node are OriginCountry, OriginPostal_Code, and Ship_Date. The value within the root node is input_param1. Notice that there are values both within the root doc and within node docs.

Business Interlinks support hierarchical input structures with the following methods:

- GetInputDocs
- AddDoc
- AddValue
- AddNextDoc

The GetInputDocs method returns a reference to the root doc of an input structure. From the previous example, it returns a reference to Calculate Cost(Domestic).

Use the AddDoc method to access the node docs. From the previous example, you would use AddDoc to access the From, To, Package_Info, and Account_Info_List node docs. If any of these nodes contained nodes, you could use AddDoc to access those as well.

Use the AddValue method to set values. From the previous example, you would use AddValue to set the value for input_param1, OriginCountry, OriginPostal_Code, and Ship_date. You must call AddDoc on a node before you can call AddValue for its values.

Use the AddNextDoc method to access the following:

- If a node doc is a list, that is, it can contain more than one set of values, use AddNextDoc to reference the next set of values.
- To add another copy of the entire input structure, use AddNextDoc to return a reference to the next root doc.


The following code example sets values for the node doc From, which is a simple node doc. It also sets the values for Account_Info_List, which is a list node doc.

```
&Calc_Input = &QE_COST.GetInputDocs("");
&FromDoc = &Calc_Input.AddDoc("From");
&ret = &FromDoc.AddValue("OriginCountry", "United States");
&ret = &FromDoc.AddValue("OriginPostal_Code", &ORIGIN);
&ret = &FromDoc.AddValue("Ship_Date", &SHIPDATE);
&Account_Doc = &Calc_Input.AddDoc("Account_Info_List");
&ret = &Account_Doc.AddValue("Account_Number", "CT-8001");
&ret = &Account_Doc.AddValue("Meter_Number", &METER);
&ret = &Account_Doc.AddValue("Service_Type", &MODE);
/* add next set of values in list */
&ret = &Calc_Input.AddNextDoc();
&ret = &Account_Doc.AddValue("Account_Number", "CT-8002");
&ret = &Account_Doc.AddValue("Meter_Number", &METER);
&ret = &Account_Doc.AddValue("Service_Type", &MODE);
```

Output Structures

The following shows an example of an output structure:

This example illustrates the fields and controls on the Example output structure. You can find definitions for the fields and controls later on this page.

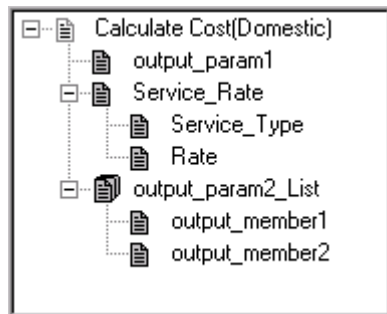

The *root doc* is Calculate Cost(Domestic).

The *node docs* are Service_Rate and output_param2_List. Each node can contain both values and child nodes. Node docs can be further described as either:

- *Simple node docs* have only one set of values for a single instance of a root doc. Service_Rate is a simple node doc.
- *List node docs* can contain more than one set of values for a single instance of a root doc. output_param2_List is a list node doc.

The values in the Service_Rate node are Service_Type, Rate, and in the output_param2_List node, output_member1 and output_member2, and within the root node, output_param1.

Business Interlinks support hierarchical output structures with the following methods:

- GetOutputDocs
- GetDoc
- GetNextDoc

- `GetPreviousDoc`
- `GetStatus`
- `GetValue`
- `GetCount`
- `MoveToDoc`

The `GetOutputDocs` method returns a reference to the root doc of an output structure. From the previous example, it returns a reference to `Calculate Cost(Domestic)`.

Use the `GetDoc` method to access node docs. From the previous example, you would use `GetDoc` to access the `Service_Rate` or `output_param2_List` node docs. If any of these nodes contain nodes, you use `GetDoc` to access those as well.

Use the `GetValue` method to retrieve the values. From the previous example, you would use `GetValue` to retrieve the values for `output_param1`, and for the `Service_Rate` node, to get the values `Service_Type`, `Rate`, `output_member1`, and `output_member2`. You must call `GetDoc` on a node before you can call `GetValue` for its values.

Use the `GetNextDoc` (or `GetPreviousDoc`) method to access the following:

- A reference to the next (or previous, respectively) root doc.
- If a node doc is a list, that is, can contain more than one set of values, use `GetNextDoc` to reference the next node doc in the list (or `GetPreviousDoc` to access the previous node doc in the list.)

Use the `GetCount` method to return either the number of docs in a list node doc, or the number of root docs. In the example, you can count the number of `Calculate Cost(Domestic)` nodes or the number of `output_param2_list` nodes.

Use the `MoveToDoc` method to move to a particular doc at the root level or to a list node doc. In the example, you can move to a `Calculate Cost(Domestic)` node or to an `output_param2_list_node`.

The following code example gets values for the node docs `Service Rate`, which is a simple node doc. It also sets the values for `output_param2_List`, which is a list node doc.

```
&Calc_Input = &QE_COST.GetOutputDocs("");
&Service_Rate_Doc = &Calc_Input.GetDoc("Service_Rate");
&ret = &Service_Rate_Doc.GetValue("Service_Type", "Overnight");
&ret = &Service_Rate_Doc.GetValue("Rate", "50.00");
&Out_Param_Doc = &Calc_Input.GetDoc("output_param2_List");
&ret = &Out_Param_Doc.GetValue("output_member1", "value1");
&ret = &Out_Param_Doc.GetValue("output_member2", "value2");
/* get next set of values in list */
&Account_Doc = &Out_Param_Doc.AddNextDoc();
&ret = &Out_Param_Doc.GetValue("output_member1", "value3");
&ret = &Out_Param_Doc.GetValue("output_member2", "value4");
```

Using the Incoming Business Interlink Methods and Properties

The incoming Business Interlink methods enable you to parse an XML request and build an XML response.

The incoming Business Interlink uses a set of methods and functions.

The `GetContentBody` Request object method converts the request content into an XML string. You can then use this string with the `GetBiDoc` function to create a BiDocs structure from it that is the same shape and contains the same data as the XML document contained in the XML string.

After you have the BiDocs structure containing the XML request, you can:

- Use the `GetNode` method to get one of the XML elements.
- Use the `NodeType` method to get the type of the node (element, processing instruction, comment).
- Use the `NodeName` property to get the name of the element.
- Use the `NodeValue` property to get the value of the element.

You can also use the standard BiDocs methods (such as `GetDoc`, `GetValue`) to retrieve information from this BiDocs object.

When an XML element contains attributes, the `AttributeCount` property gets the number of attributes, the `GetAttributeName` method gets the name of an attribute, and the `GetAttributeValue` method gets the value of an attribute.

To build an XML response, you can use the `GetBiDocs` function to create a blank BiDocs structure. To create the XML structure within that BiDocs, use `CreateElement` to create an XML tag, `AddComment` to add an XML comment, `AddAttribute` to add an attribute to an XML tag, and `AddProcessingInstruction` to add a processing instruction (the first tag of the XML response).

Use the `GenXMLString` method to create an XML string from the BiDocs structure. Then you can use the `Write Response` method to write the response to the HTTP response string.

Related Topics

- [Understanding Business Interlink Class](#)
The PeopleSoft Business Interlink framework provides a gateway for PeopleSoft applications to the services of any external system. This framework enables any PeopleSoft component (that is, a page, an Application Engine program, and so on) to integrate with any external system in near real-time and batch modes.

Understanding the State of an Interlink Object

PeopleSoft Business Interlink API that are run on the application server should be stateless, that is, if you want to save information from one call of the Interlink object to the next, you have to do it yourself by writing the relevant information to the database. If you use the `Execute` method more than once within a single PeopleCode event (that is, if you have the `Execute` method in some sort of loop) the state is preserved. After you leave the event, any state associated with the Interlink object is lost.

You should create only one Business Interlink object, that is, you should only use the `GetInterlink` function once. After that, you can load it with data, pass the data to the Interlink plug-in (using `Execute`) and fetch output data as many times as you need.

Using Business Interlink with Application Engine

In a regular PeopleCode program, you can only declare a Business Interlink object as local. However, in an Application Engine program, you can declare a Business Interlink object as global. Instantiating a Business Interlink object once as a global saves on the significant overhead of reinstantiating a local object for every iteration of PeopleCode called in a loop.

- Global Business Interlink objects can only be used in Application Engine PeopleCode programs because PeopleCode that runs on an application server must be stateless.
- When a restartable Application Engine program abends, global Business Interlink objects that were instantiated before the last checkpoint are automatically reinstantiated at restart. So the object will be available, even though no call has been made to `GetInterlink` in the restarted process. However, the associated Business Interlink data buffers are *not* recovered, so the Application Engine program must be written such that these buffers are empty whenever a checkpoint is taken.
- Business Interlink objects should *not* be declared as global unless they are used in several PeopleCode actions, or in a PeopleCode action that is called in a loop. Only in these instances is the overhead of doing a checkpoint worthwhile.

Using the Data Type of a Business Interlink Object

You should declare a Business Interlink object using the data type `Interlink`. For example,

```
Local Interlink &MYBI;
```

Declare hierarchical data as type `BIDocs`. For example:

```
Local BIDocs &OutlistDoc;
```

Note

`BIDocs` and `Interlink` objects used in PeopleCode programs run on the application server can be declared only as type `Local`. You can declare `Interlinks` as `Global` only in an Application Engine program.

Understanding the Scope of a Business Interlink Object

A Business Interlink object can be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

Business Interlink Class Built-in Functions

PeopleCode Language Reference: `GetBiDoc` function

PeopleCode Language Reference: `GetInterlink` function

Business Interlink Class Methods

In this section, we discuss the Business Interlink class methods. The methods are discussed in alphabetical order.

AddDoc method: Business Interlink class

Syntax

AddDoc(*docname*)

Description

The AddDoc method adds a document to an input structure. The added document is an input parameter for a Business Interlink object that is not of simple type (such as integer or string). You must add the document to the input structure before you can add values to its members with AddValue.

Parameters

Parameter	Description
<i>docname</i>	The name of the document that AddDoc adds to the structure.

Returns


The document added to the BIDocs input document.

Example

In the following example, the input structure for Calculate Cost, or the root level document, is created with the GetInputDocs method. (To create, or add, more input structures, use AddNextDoc.) The Calculate Cost input parameter From is a document, so the AddDoc method adds it to the input document.

```
Local Interlink &QE_COST;  
Local BIDocs &CalcCostIn;  
Local BIDocs &FromDoc, &ToDoc, &PackageDoc, &AccountDoc;  
Local number &ret, &retinput;  
&QE_COST = GetInterlink(Interlink.QE_COST_EX);  
&CalcCostIn = &QE_COST.GetInputDocs("");  
&ret = &CalcCostIn.AddValue("input_param1","value");  
&FromDoc = &CalcCostIn.AddDoc("From");  
&ret = &FromDoc.AddValue("OriginCountry", "United States");  
&ret = &FromDoc.AddValue("OriginPostal_Code", &ORIGIN);  
&ret = &FromDoc.AddValue("Ship_Date", &SHIPDATE);  
/* Call AddDoc and AddValue for To, Package_Info, and Account_Info_List (code  
not⇒  
shown) */
```

The following shows the input structure for this example. It contains five input parameters: input_param1, From, To, Package_Info, and Account_Info_List. This is a version of the Federal Express plug-in that was modified for this example (input_param1 was added, Account_Info was modified to be a list).

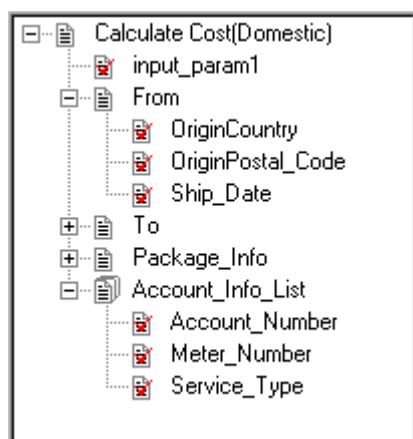

Related Topics

- [GetInputDocs method: Business Interlink class](#)
- [AddValue method: Business Interlink class](#)
- [AddNextDoc method: Business Interlink class](#)

AddInputRow method: Business Interlink class

Syntax

`AddInputRow(inputname, value)`

where *inputname* and *value* are in matched pairs, in the form:

inputname1, value1 [, *inputname2, value2*] . . .

Description

The `AddInputRow` method adds a row of input data (*value*) from PeopleCode variables or record fields for the Business Interlink object executing the method. These must be entered in matched pairs, that is, every input name must be followed by its matching value.

Note

The input *name*, not the input path, of the interface definition is used for this method.

There must be an input name for every input parameter defined in the interface definition used to instantiate the Business Interlink object.

If you specify a record field that is not part of the record the PeopleCode program is associated with, you must use *rename..fieldname* for that value.

You can specify default values for every input name in the interface definition (created in Application Designer.) These values are used if you create a PeopleCode "template" by dragging the interface definition from the Project window in Application Designer to an open PeopleCode editor window.

Parameters

Parameter	Description
inputname	Specify the input name. There must be one <i>inputname</i> for every input name defined in the interface definition used to instantiate the Business Interlink object.
value	Specify the value for the input name. This can be a constant, a variable, or a record field. Each <i>value</i> must be paired with an <i>inputname</i> .

Returns

A Boolean value: True if the input values were successfully added. Otherwise, it returns False.

Example

In the following example, the Business Interlink object name is SRA_ALL_1, and the input name, such as ship_site_name, are being bound to record fields, such as QE_RP_SITENAME or VENDOR_INFO.QE_RP_PROMISEDATE, to variables like &PARTNAME, or to literals, like 10 for quantity.

```
&SRA_ALL_1.AddInputRow("ship_site_name", QE_RP_SITENAME,  
    "promise_date", VENDOR_INFO.QE_RP_PROMISEDATE,  
    "request_date", QE_RP_ORDERREQDATE,  
    "subline_site_name", QE_RP_SITENAME,  
    "quantity", 10,  
    "part_name", &PARTNAME,  
    "site_name", INV_LOCATIONS.QE_RP_SITENAME);
```

Related Topics

- [Execute method: Business Interlink class](#)
- PeopleCode Language Reference: GetInterlink function

AddNextDoc method: Business Interlink class

Syntax

```
AddNextDoc()
```

Description

The AddNextDoc method adds a document to one of the following levels:

- The root level of the input structure for a Business Interlink object. You create a reference to this level with the GetInputDocs method.
- When a document within the input structure is a list, AddNextDoc adds another document to the list. If you use AddNextDoc on a document that is not a list, AddNextDoc fails and returns an error.

Parameters

None.

Returns

This method returns an integer. The values are:

Value	Description
0	eNoError. The method succeeded.
1	eNO_DOCUMENT. The document referenced by this method does not exist.
2	eDOCLIST_OUT_RANGE. You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call GetDoc/GetOutputDocs once, you can call GetNextDoc four times; the fifth time results in this error.
3	eDOCUMENT_UNINITIALIZED. Internal error.
4	eNOT_DOCUMENTTYPE. You tried to perform an operation upon a parameter that is not a document type.
5	eNOT_LISTTYPE. You tried to perform a GetNextDoc or AddNextDoc upon a document that is not a list.
7	eNOT_BASICTYPE. You tried to perform a GetValue or AddValue upon a parameter that is not of basic type: Integer, Float, String, Time, Date, DateTime.
8	eNO_DATA. You tried to retrieve data from a document that contained no data.

Example

In this example, the input structure for Calculate Cost, or the root level document, is accessed with the GetInputDocs method. The AddNextDoc method adds another BIDocs input document. The Calculate Cost input parameter Account_Info_List is a document, so the AddDoc method adds it to the BIDocs input document. Account_Info_List is also a document list, so AddNextDoc method adds another Account_Info_List document.

```

Local Interlink &QE_COST;
Local BIDocs &CalcCostIn;
Local BIDocs &FromDoc, &ToDoc, &PackageDoc, &AccountDoc;
Local number &ret, &retinput;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
&CalcCostIn = &QE_COST.GetInputDocs("");
For &n = 1 to &number_of_input_sets
/* Get values for inputs, such as &ORIGIN (code not shown) */
  &ret = &CalcCostIn.AddValue("input_param1","value");
  &FromDoc = &CalcCostIn.AddDoc("From");
  &ret = &FromDoc.AddValue("OriginCountry", "United States");
  &ret = &FromDoc.AddValue("OriginPostal_Code", &ORIGIN);
  &ret = &FromDoc.AddValue("Ship_Date", &SHIPDATE);

```

```


/* Call AddDoc and AddValue for To and Package_Info
   (code not shown) */
/* Call AddDoc and AddNextDoc for the AccountDoc document list */
&AccountDoc = &CalcCostIn.AddDoc("Account_Info_List");
For &m = 1 to &number_of_AccountDocs
    &ret = &AccountDoc.AddValue("Account_Number", &ACCOUNT);
    &ret = &AccountDoc.AddValue("Meter_Number", &METER);
    &ret = &AccountDoc.AddValue("Service_Type", &SVCTYPE);
    &retinput = &AccountDoc.AddNextDoc();
End-For; &retinput = &CalcCostIn.AddNextDoc();

End-For;

&retinput = &To.AddNextDoc();

```

The following shows the input structure for this example. It contains five input parameters: input_param1, From, To, Package_Info, and Account_Info_List. From, To, and Package_Info are not lists, so if you try to use AddNextDoc with these parameters, such as the following line of code, AddNextDoc will fail and return an error message.

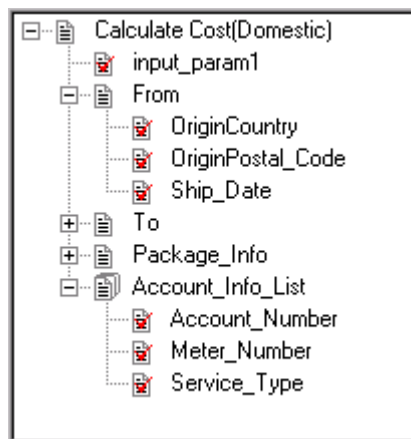

Related Topics

- [GetInputDocs method: Business Interlink class](#)
- [AddDoc method: Business Interlink class](#)
- [AddValue method: Business Interlink class](#)

AddValue method: Business Interlink class

Syntax

AddValue(*paramname*, *value*)

Description

The AddValue method adds a value to a member of a document within the input structure for a Business Interlink object.

Parameters

Parameter	Description
<i>paramname</i>	The name of the member of the document that is having a value added to it.
<i>value</i>	The value that is added. This can be a constant, a variable, or a record field. The data type can be String, Integer, Double, Float, Time, Date, or DateTime.

Returns

This method returns an integer. The values are:

Value	Description
0	eNoError. The method succeeded.
1	eNO_DOCUMENT. The document referenced by this method does not exist.
2	eDOCLIST_OUT_RANGE. You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call GetDoc/GetOutputDocs once, you can call GetNextDoc four times; the fifth time results in this error.
3	eDOCUMENT_UNINITIALIZED. Internal error.
4	eNOT_DOCUMENTTYPE. You tried to perform an operation upon a parameter that is not a document type.
5	eNOT_LISTTYPE. You tried to perform a GetNextDoc or AddNextDoc upon a document that is not a list.
7	eNOT_BASICTYPE. You tried to perform a GetValue or AddValue upon a parameter that is not of basic type: Integer, Float, String, Time, Date, DateTime.
8	eNO_DATA. You tried to retrieve data from a document that contained no data.

Example

In the following example, the Business Interlink object name is QE_COST.

In the following example, the input structure for Calculate Cost, or the root level document, is accessed with the GetInputDocs method. (To create, or add, more input structures, use AddNextDoc.) The Calculate Cost input parameter From is a document, so the AddDoc method adds it to the input structure. Then the AddValue method adds values to each of the From document members.

```
Local Interlink &QE_COST;  
Local BIDocs &CalcCostIn;  
Local BIDocs &FromDoc, &ToDoc, &PackageDoc, &AccountDoc;  
Local number &ret;
```

```


&QE_COST = GetInterlink(Interlink.QE_COST_EX);
/* Get some values for input, such as &ORIGIN (code not shown) */
&CalcCostIn = &QE_COST.GetInputDocs("");
&ret = &CalcCostIn.AddValue("input_param1", "value");

&FromDoc = &CalcCostIn.AddDoc("From");
&ret = &FromDoc.AddValue("OriginCountry", "United States");
&ret = &FromDoc.AddValue("OriginPostal_Code", &ORIGIN);
&ret = &FromDoc.AddValue("Ship_Date", &SHIPDATE);

/* Call AddDoc, AddValue for Package, Account_Info_List, and also call
AddNextDoc⇒
for Account_Info_List (code not shown) */

```

The following shows the input structure for this example. It contains five input parameters: input_param1, From, To, Package_Info, and Account_Info_List.

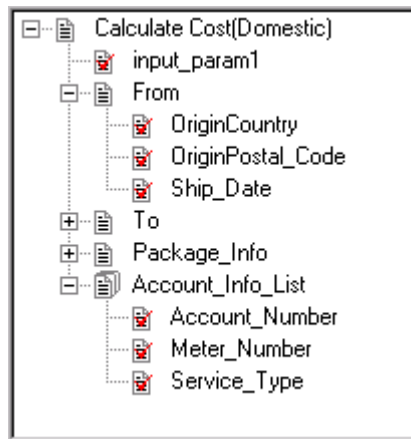

Related Topics

- [GetInputDocs method: Business Interlink class](#)
- [AddDoc method: Business Interlink class](#)
- [AddNextDoc method: Business Interlink class](#)

BulkExecute method: Business Interlink class

Syntax

```

BulkExecute(RECORD.inputrecname [, RECORD.outputrecname] [,
{user_process_inst | user_operid}])

```

Description

The BulkExecute method uses the data in the specified record to populate the input buffer, copying like-named fields. Then the method executes, and, optionally, fills the record specified by outputrecname with data from the Business Interlink output buffer. BulkExecute results in significantly faster performance for transactions that process large amounts of data. Instead of adding one input row at a time, then fetching the values one at a time, you might write the data to a staging table, use the BulkExecute method and then read the data from the output table.

This would be especially effective in Application Engine programs that process sets of data rather than individual rows.

This method assumes that the names of the fields in the record match the names of the inputs (or outputs) defined in the Business Interlink Definition. If there is no field in the *inputrecname* for a Business Interlink input parameter, the parameter's default value is used. If no default is specified, an empty string is passed. You must ensure that this default value is legitimate.

Fields in the output buffer are matched against the fields specified in the output record. You do not have to specify an output record. If you don't specify an output record, the output buffers are not populated.

If you specify an output record, and if you have fields in the output record that are not specified as output parameters, they aren't populated with the BulkExecute method. In addition, they shouldn't be set as NOT NULL, otherwise inserts fail.

Note

Before you use this method, you should flush the record used for output and remove any residual data that might exist in it.

If you specify an output record, and you want to use the output record for error checking, you must add the following fields to your output record:

- RETURN_STATUS
- RETURN_STATUS_MSG

Note

The field names in the output record must match these names exactly.

Then you must mark one or more input parameters as "key fields" in the Business Interlink definition (using the BulkExecute ID check box.) The value of these key fields are copied to the output record, and you can use these fields to match error messages with input (or output) rows.

To order your input (and output) rows, you must add the BI_SEQ_NUM column to both the input and output table:

Note

The field name in your input and output records must match this name exactly.

The input rows are read in the order of numbers in BI_SEQ_NUM, and the output rows are generated using the same order number.

This method automatically executes, so you don't need to use the Execute method with this method.

Whether this method halts on execution depends on the setting of the StopAtError configuration parameter. The default value is True, that is, stop if the error number returned is

something other than a 1 or 2. This configuration parameter must be set before using the BulkExecute method.

Parameters

Parameter	Description
<code>RECORD.inputrecname</code>	Specify a record (SQL table) that contains the data to populate the input buffer of the Business Interlink.
<code>RECORD.outputrecname</code>	Specify a record (SQL table) that will hold the data that populates the output buffer of the Business Interlink. This is optional; it is often used to error check the input.
<code>user_process_inst user_operid</code>	This is an optional parameter that allows either different Application Engine programs or different clients to populate the same RECORD. <code>outputrecname</code> at the same time. For <code>user_process_inst</code>, the parameter takes an integer. RECORD. <code>outputrecname</code> must have a PROCESS_INSTANCE field. The PROCESS_INSTANCE field is used to identify the Application Engine program that is using this Business Interlink. You can use the %PROCESS_INSTANCE variable to populate <code>user_process_inst</code>. For <code>user_operid</code>, the parameter takes a string. RECORD. <code>outputrecname</code> must have an OPERID field. The OPERID field is used to identify the client who is using this Business Interlink. You can use the %OPERID variable to populate <code>user_operid</code>.

Returns


The following are the valid returns:

Value	Description
1	The Business Interlink object executes successfully
2	The Business Interlink object failed to execute
3	Transaction failed
4	Query failed
5	Missing criteria
6	Input mismatch
7	Output mismatch
8	No response from server
9	Missing parameter
10	Invalid user name
11	Invalid password
12	Invalid server name
13	Connection error

Value	Description
14	Connection refused
15	Timeout reached
16	Unequal lists
17	No data for output
18	Output parameters empty
19	Driver not found
20	Internet connect error
21	XML parser error
22	XML deserialize

Example


This image is an example of input record for BulkExecute. Here are two PeopleSoft records that could be used as input and output records for BulkExecute. The key fields in the input record, which need to have the BulkExecute ID check box checked in Application Designer, are QE_RP_PO_NUMBER and QE_RP_SITENAME. These key fields are used both for input and output.

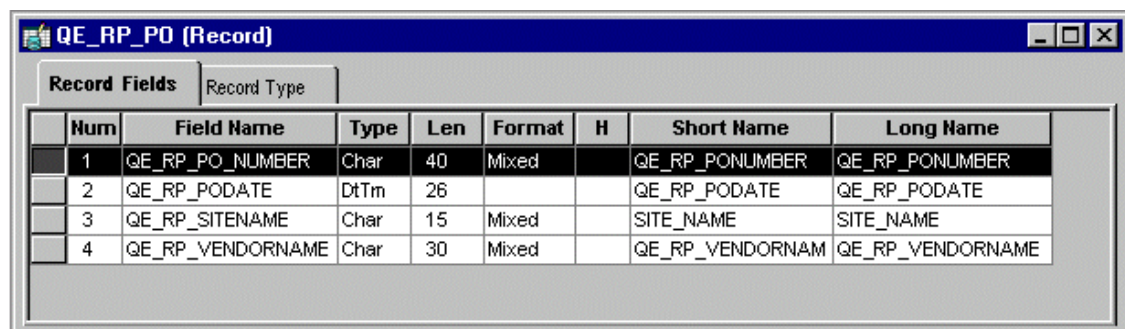

The screenshot shows a window titled "QE_RP_PO (Record)". It has two tabs: "Record Fields" (selected) and "Record Type". Below the tabs is a table with the following data:

Num	Field Name	Type	Len	Format	H	Short Name	Long Name
1	QE_RP_PO_NUMBER	Char	40	Mixed		QE_RP_PONUMBER	QE_RP_PONUMBER
2	QE_RP_PODATE	DtTm	26			QE_RP_PODATE	QE_RP_PODATE
3	QE_RP_SITENAME	Char	15	Mixed		SITE_NAME	SITE_NAME
4	QE_RP_VENDORNAME	Char	30	Mixed		QE_RP_VENDORNAM	QE_RP_VENDORNAME

This image is an example of output record for BulkExecute.

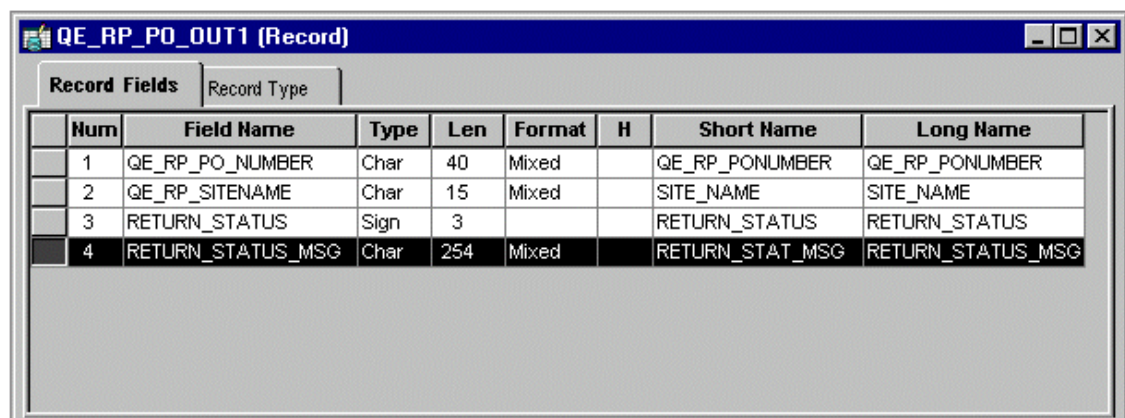


The screenshot shows a window titled "QE_RP_PO_OUT1 (Record)". It has two tabs: "Record Fields" (selected) and "Record Type". Below the tabs is a table with the following data:


Num	Field Name	Type	Len	Format	H	Short Name	Long Name
1	QE_RP_PO_NUMBER	Char	40	Mixed		QE_RP_PONUMBER	QE_RP_PONUMBER
2	QE_RP_SITENAME	Char	15	Mixed		SITE_NAME	SITE_NAME
3	RETURN_STATUS	Sign	3			RETURN_STATUS	RETURN_STATUS
4	RETURN_STATUS_MSG	Char	254	Mixed		RETURN_STAT_MSG	RETURN_STATUS_MSG

The following is an example of Business Interlink inputs for BulkExecute. Here are the corresponding inputs and outputs for a Business Interlink that has had its inputs and outputs

renamed to match the field names in the records. The inputs and outputs have been renamed where necessary to match the record field names.

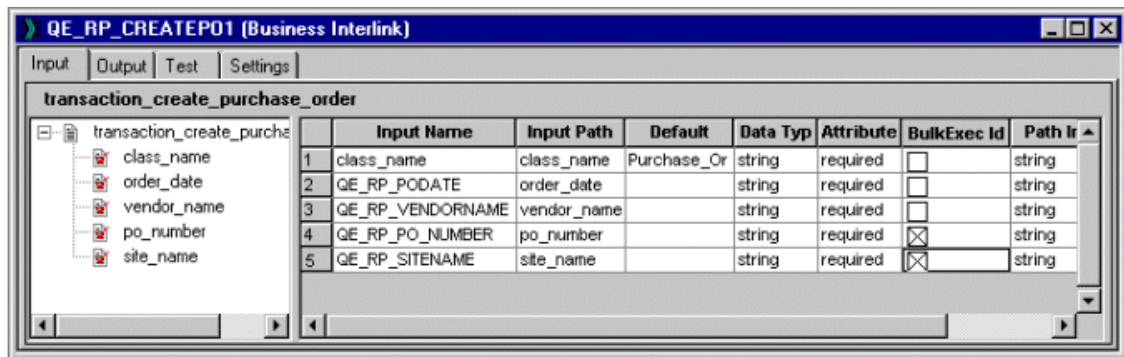

The following image is an example of Business Interlink inputs for BulkExecute.

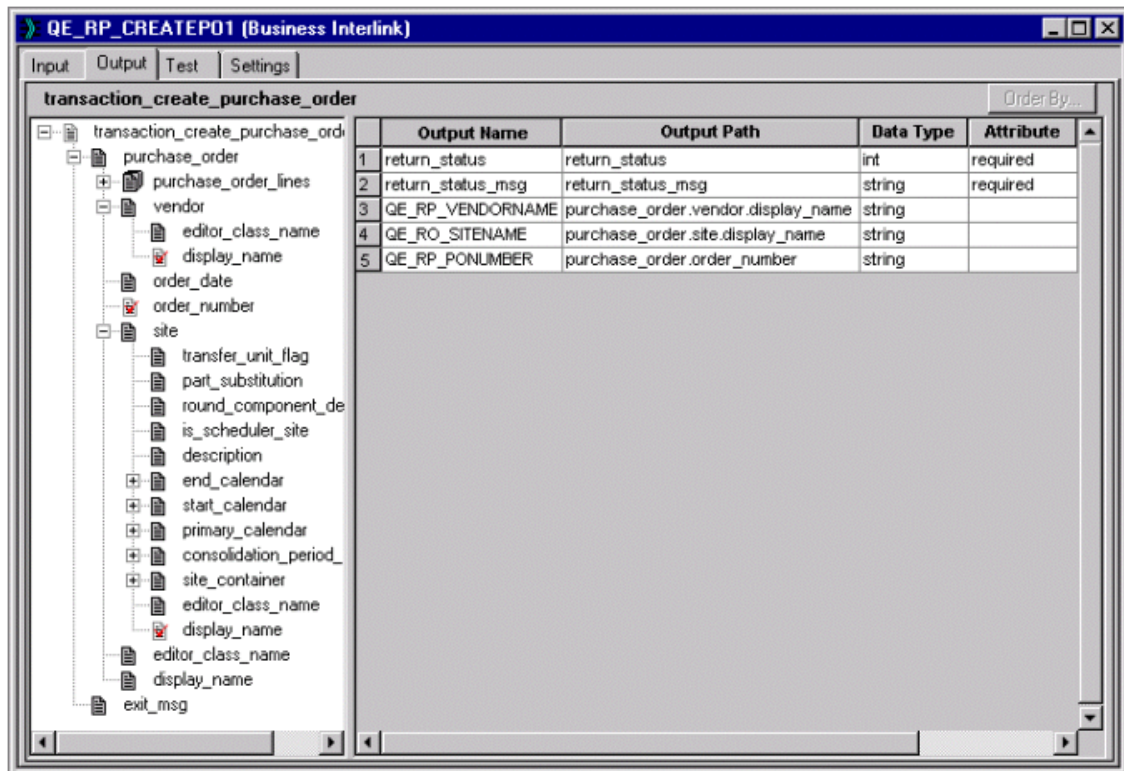

The PeopleCode program using these records could contain the following code to run BulkExecute.

```
Local Interlink &CREATE_P0;
Local number &EXECRESLT;
&CREATE_P0 = GetInterlink(INTERLINK.QE_RP_CREATEP01);
/* The next three lines set configuration parameters, which are not shown in
the⇒
previous examples. */
&CREATE_P0.SERVER_NAME = "bc1";
&CREATE_P0.RSERVER_HOST = "192.0.2.1";
```

```
&CREATE_PO.RSERVER_PORT = "2200";  
&EXECRSLT = &CREATE_PO.BulkExecute(RECORD.QE_RP_PO, RECORD.QE_RP_PO_OUT1);
```

Related Topics

- [StopAtError property: Business Interlink class](#)

Clear method: Business Interlink class

Syntax

```
Clear()
```

Description

The Clear method clears the input and output buffers. If you're using Business Interlinks in a batch program, every time after you use the Execute method, use the Clear method to flush out the input and output buffers.

Parameters

None.

Returns

None.

Example

```
For &n = 1 to x  
    &myinterlink.AddInputRow("input1", value1, "input2", value2);  
    &myinterlink.Execute();  
    &myinterlink.FetchNextRow("output1", value1, "output2", value2);  
    /* do processing on data */  
    &myinterlink.Clear();  
    &n = &n + 1;  
End-for;
```

Related Topics

- [Execute method: Business Interlink class](#)
- [BulkExecute method: Business Interlink class](#)

Execute method: Business Interlink class

Syntax

```
Execute()
```

Description

When an Interlink object executes the Execute method, the transaction associated with the Interlink object is executed.

If there is only one row, after appropriate substitution is made, the transaction is executed only once. Otherwise, the data is "batched up" and sent once. You have to call Execute only once to execute all the rows of the input buffer.

Generally, you would only use the Execute method after using the AddInputRow method. If you create a PeopleCode "template" by dragging the Business Interlink definition from the Project window in Application Designer to an open PeopleCode editor window, the usual order of the execution of methods is shown in the template.

If you're using Business Interlinks in a batch program, every time after you use the Execute method, use the Clear method to flush out the input and output buffers.

Whether this method halts on execution depends on the setting of the StopAtError configuration parameter. The default value is True, that is, stop if the error number returned is something other than a 1 or 2. This configuration parameter must be set *before* using the Execute method.

Parameters

None.

Returns

The following are the valid returns:

Value	Description
1	The Business Interlink object executes successfully
2	The Business Interlink object failed to execute
3	Transaction failed
4	Query failed
5	Missing criteria
6	Input mismatch
7	Output mismatch
8	No response from server
9	Missing parameter
10	Invalid user name
11	Invalid password
12	Invalid server name
13	Connection error
14	Connection refused
15	Timeout reached
16	Unequal lists
17	No data for output
18	Output parameters empty
19	Driver not found
20	Internet connect error
21	XML parser error
22	XML deserialize

Example

```
Local number &EXECRSLT;  
.  
.  
.  
&EXECRSLT = &SRA_ALL_1.Execute();  
If (&EXECRSLT <> 1) Then  
/* The instance failed to execute */  
/* Do Error Processing */  
End-If;
```

Related Topics

- [BulkExecute method: Business Interlink class](#)
- [Clear method: Business Interlink class](#)
- PeopleCode Language Reference: GetInterlink function

FetchIntoRecord method: Business Interlink class

Syntax

```
FetchIntoRecord(RECORD.recname, [, {user_process_inst | user_operid}])
```

Description

The FetchIntoRecord method copies the data from the output buffer into the specified record (SQL table) copying *like-named* fields. This method assumes that the names of the fields in the record match the names of the outputs defined in the Business Interlink definition.

You can use the FetchIntoRecord method to perform a transaction on a large amount of data that you want to receive from your system. Instead of executing your Business Interlink and then fetching one output row at a time, you might execute your Business Interlink, then use the FetchIntoRecord method to write the data returned from the Business Interlink to a staging table.

Note

Before you use this method, you should flush the record used for output and remove any residual data that might exist in it.

If your data is hierarchical, that is, in a rowset, and you want to preserve the hierarchy, use FetchIntoRowset instead of this method.

To order your output rows, you must add the BI_SEQ_NUM column to the record.

This column is populated with a sequence number that corresponds to the order in which each row of the record was written to by the method.

Parameters

Parameter	Description
RECORD. <i>recname</i>	Specify a record (SQL table) that you want to populate with data from the output buffers.
<i>user_process_inst</i> <i>user_operid</i>	This is an optional parameter that enables either different Application Engine programs or different clients to populate the same RECORD. <i>outputrecname</i> at the same time. For <i>user_process_inst</i>, the parameter takes an integer. RECORD. <i>outputrecname</i> must have a PROCESS_INSTANCE field. The PROCESS_INSTANCE field is used to identify the Application Engine program that is using this Business Interlink. You can use the %PROCESS_INSTANCE variable to populate <i>user_process_inst</i>. For <i>user_operid</i>, the parameter takes a string. RECORD. <i>outputrecname</i> must have an OPERID field. The OPERID field is used to identify the client who is using this Business Interlink. You can use the %OPERID variable to populate <i>user_operid</i>.

Returns

Number of rows fetched if one or more non-empty rows are returned.

If an empty row is returned, that is, every if field is empty except the return_status and return_status_msg fields, this method returns one of the following error messages:

Number	Meaning
0	No error
1	NoInterfaceObject
2	ParamCountError
3	IncorrectParameterType
4	NoColumnForOutputParm
5	NoColumnForInputParm
6	BulkInsertStartFailed
7	BulkInsertStopFailed
8	CouldNotCreateSelectCursor
9	CouldNotCreateInsertCursor
10	CouldNotDestroySelectCursor
11	CouldNotDestroyInsertCursor
12	InputRecordDoesNotExist
13	OutputRecordDoesNotExist
14	ContainEmptyRow
15	SQLExecError
201	FieldTooLarge

Number	Meaning
202	IgnoreSignNumber
203	ConvertFloatToInt

Example

```
&RSLT = &QE_SM_CONCAT.FetchIntoRecord(RECORD.PERSONAL__VENDR_DATA);
```

```
If &RSLT = 0 Then  
/* no rows fetched */  
Else  
    /* do processing */  
End-If;
```

Related Topics

- [BulkExecute method: Business Interlink class](#)

FetchIntoRowset method: Business Interlink class

Syntax

```
FetchIntoRowset(&Rowset)
```

Description

The `FetchIntoRowset` method copies the data from the output buffer into the specified rowset, copying *like-named* fields. This method assumes that the names of the fields in the rowset match the names of the outputs defined in the Business Interlink definition, and that the structure is the same.

Note

Before you use this method, you should flush the rowset used for output and remove any residual data that might exist in it.

Use this method only if you have a hierarchical data structure and you want to preserve the hierarchy. Otherwise, use `BulkExecute` or `FetchIntoRecord`.

Parameters

Parameter	Description
<code>&Rowset</code>	Specify rowset object that you want to populate with data from the output buffers. This must be an existing, instantiated rowset.

Returns

Number of rows fetched if one or more non-empty rows are returned.

If an empty row is returned, that is, every if field is empty except the return_status and return_status_msg fields, this method returns one of the following error messages:

Value	Description
0	No error
1	NoInterfaceObject
2	ParamCountError
3	IncorrectParameterType
4	NoColumnForOutputParm
5	NoColumnForInputParm
6	BulkInsertStartFailed
7	BulkInsertStopFailed
8	CouldNotCreateSelectCursor
9	CouldNotCreateInsertCursor
10	CouldNotDestroySelectCursor
11	CouldNotDestroyInsertCursor
12	InputRecordDoesNotExist
13	OutputRecordDoesNotExist
14	ContainEmptyRow
15	SQLExecError
201	FieldTooLarge
202	IgnoreSignNumber
203	ConvertFloatToInt

Example

The following is an image of EMPLOYEE_CHECKLIST Page order. The example uses the rowset on level one from the EMPLOYEE_CHECKLIST page. A PeopleCode program running in a field on level zero in that page can access the level one (child rowset).

EMPLOYEE_CHECKLIST.ENG (Panel)								
Panel Designer		Order						
	Lvl	Label	Type	Field	Record	Display Control	Related Display	Related Control
1	0	Frame	Frame			☒	☒	
2	0	Frame	Frame			☐	☐	
3	0	Frame	Frame			☐	☐	
4	0	Employee Name	Edit Box	NAME	PERSONAL_DATA	☐	☐	
5	0	ID	Edit Box	EMPLID	PERSONAL_DATA	☐	☐	
6	1	Checklist Item Tbl	Scroll Bar			☒	☒	
7	1	Checklist Sequen	Edit Box	CHECKLIST_SEQ	CHECKLIST_ITEM	☐	☐	
8	1	Scroll Bar 1	Scroll Bar			☒	☒	
9	1	Checklist Date	Edit Box	CHECKLIST_DT	EMPL_CHECKLIST	☐	☐	
10	1	derived_hr_effdt	Edit Box	EFFDT	DERIVED_HR	☐	☐	
11	1	Checklist	Edit Box	CHECKLIST_CD	EMPL_CHECKLIST	☒	☐	
12	1	Checklist Descript	Edit Box	DESCR	CHECKLIST_TBL	☐	☒	11
13	1	Responsible ID	Edit Box	RESPONSIBLE_ID	EMPL_CHECKLIST	☒	☐	
14	1	Responsible Nam	Edit Box	NAME	PERSONAL_DATA	☐	☒	13
15	1	Comment	Long Edit Box	COMMENTS	EMPL_CHECKLIST	☐	☐	
16	2	Scroll Bar 2	Scroll Bar			☒	☒	
17	2	Chklist Seq	Edit Box	CHECKLIST_SEQ	EMPL_CHKLIST_ITM	☐	☐	
18	2	Chklist itm	Edit Box	CHKLIST_ITEM_CD	EMPL_CHKLIST_ITM	☒	☐	
19	2	Briefing Descripti	Edit Box	DESCR	CHKLIST_ITEM_TBL	☐	☒	18
20	2	Briefing Status	Drop Down List	BRIEFING_STATUS	EMPL_CHKLIST_ITM	☐	☐	
21	2	Status Date	Edit Box	STATUS_DT	EMPL_CHKLIST_ITM	☐	☐	

EMPL_CHECKLIST is the primary database record for the level one scrollbar on the EMPLOYEE_CHECKLIST page. The following PeopleCode accesses the level one rowset using EMPL_CHECKLIST. The Business Interlink object name is QE_BI_EMPL_CHECKLIST. This Business Interlink object uses the level one rowset as its input and its output.

The InputRowset method uses this rowset as input for QE_BI_EMPL_CHECKLIST. Then a blank duplicate of the rowset is created with CreateRowset, and then the output of QE_BI_EMPL_CHECKLIST is fetched into the blank rowset with FetchIntoRowset.

```

&MYROWSET = GetRowset(SCROLL.EMPL_CHECKLIST);
&ROWCOUNT = &QE_BI_EMPL_CHECKLIST.InputRowset(&MYROWSET);
&RSLT = &QE_BI_EMPL_CHECKLIST.Execute();
/* do some error processing */
&WorkRowset = CreateRowset(&MYROWSET);
&ROWCOUNT = &QE_BI_EMPL_CHECKLIST.FetchIntoRowset(&WorkRowset);
If &ROWCOUNT = 0 Then
/* do some error processing */
Else
    /* Process the rowset from QE_BI_EMPL_CHECKLIST. Check it for errors. */
    For &I = 1 to &WorkRowset.RowCount
        For &K = 1 to &WorkRowset(&I).RecordCount
            &REC = &WorkRowset(&I).GetRecord(&K);
            &REC.ExecuteEdits();
            For &M = 1 to &REC.FieldCount
                If &REC.GetField(&M).EditError Then
                    /* there are errors */
                    /* do other processing */
                    End-If;
                End-For;
            End-For;
        End-For;
    End-for;
End-if;

```

Related Topics

- [InputRowset method: Business Interlink class](#)
- PeopleCode Developer's Guide: Understanding Data Buffer Access

FetchNextRow method: Business Interlink class

Syntax

`FetchNextRow(outputname, value)`

where *outputname* and *value* are in matched pairs, in the form:

outputname1, *value1* [, *outputname2*, *value2*] . . .

Description

After the Business Interlink object executes the method `Execute`, the `FetchNextRow` method can be used to retrieve a row of output and store the values of the output name (*outputname*) to PeopleCode variables or record fields (*value*). These must be entered in matched pairs, that is, every output name must be followed by its matching value.

Note

The output *name*, not the output path of the interface definition is used for this method.

There must be an *outputname* for every output name defined in the interface definition used to instantiate the Business Interlink object.

If you specify a record field that is not part of the record the PeopleCode program is associated with, you must use *recname.fieldname* for that *value*.

You can specify default values for every output name in the interface definition (created in Application Designer.) These values are used if you create a PeopleCode "template" by dragging the interface definition from the Project window in Application Designer to an open PeopleCode Editor window.

Parameters

Parameter	Description
<i>outputname</i>	Specify the output name. There must be one <i>outputname</i> for every output name defined in the interface definition used to instantiate the Business Interlink object.
<i>value</i>	Specify the value for the output name. This can be a constant, a variable, or a record field. Each <i>value</i> must be paired with an <i>outputname</i> .

Returns

A Boolean value: True if the row of output parameters was fetched. Otherwise, it returns False.

Example

In the following example, the Business Interlink object name is SRA_ALL_1, and the output names, such as costs, are being bound to record fields, such as STR_COST.

```
&RSLT = &SRA_ALL_1.FetchNextRow("costs", &STR_COST,  
    "unit_costs", &STR_UNIT_COST,  
    "customer_ship_dates", &STR_SHIP_DATE,  
    "quantities", &STR_QUANTITY,  
    "so_numbers", &STR_SO_NUM,  
    "so_names", &STR_SO_NAME,  
    "line_numbers", &STR_LINE_NUM,  
    "ship_sets", &STR_SHIP_SET,  
    "customer_receipt_dates", &STR_RECPT_DATE);
```

Related Topics

- [Execute method: Business Interlink class](#)
- PeopleCode Language Reference: GetInterlink function

GetCount method: Business Interlink class

Syntax

```
GetCount(docname)
```

Description

The GetCount method returns the number of documents within a document list contained within an output structure for a Business Interlink object.

Parameters

Parameter	Description
<i>docname</i>	The name of the document list.

Returns

The number of documents in the list.

Example

In the following example, the output structure for Calculate Cost, or the root level document, is accessed with the GetOutputDocs method. The Calculate Cost output parameter output_param2_List is a document, so the GetDoc method gets it from the output structure. Because output_param2_List is a document list, GetCount gets the number of documents in the list.

```
Local Interlink &QE_COST;  
Local number &count;  
Local BIDocs &CalcCostOut;  
Local BIDocs &OutlistDoc;  
Local number &ret;
```


```

&QE_COST = GetInterlink(Interlink.QE_COST_EX);
/* Get inputs, execute. (code not shown) */
&CalcCostOut = &QE_COST.GetOutputDocs("");
/* Call GetValue for output_param1, call GetDoc, GetValue for
Service_Rate (code not shown) */
&OutlistDoc = &CalcCostOut.GetDoc("output_param2_List");
&count = &CalcCostOut.GetCount("output_param2_List");

&I = 0;
While (&I < &count)
    &ret = &OutlistDoc.GetValue("output_member1", &VALUE1);
    &ret = &OutlistDoc.GetValue("output_member2", &VALUE2);
    If &ret = 0 Then
        /* Process output values */
        &I = &I + 1;
        &retoutput = &OutlistDoc.GetNextDoc();
    End-If;
End-While;

```

The following example shows the output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List.

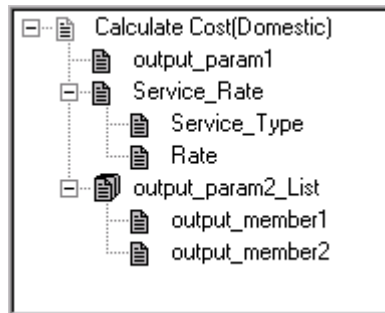

GetDoc method: Business Interlink class

Syntax

GetDoc(*docname*)

Description

The GetDoc method gets a document from an output structure. The document is an output parameter for a Business Interlink object that is not of simple type (such as integer or string). You must get the document from the output structure before you can get values from its members with GetValue.

You can call GetDoc using dot notation, to access documents that are "nested" within other documents. For example, the following accesses a document nested three levels deep:

```
&Docs3 = &CalcCostOut.GetDoc("Doc1.Doc2.Doc3");
```

Parameters

Parameter	Description
<i>docname</i>	The name of the document that GetDoc should get from the output structure.

Returns

A reference to the document received from the output structure.

Example


In the following example, the Output structure for Calculate Cost(Domestic), or the root level document, is created with the GetOutputDocs method. (To create, or get, more Output structures, call GetNextDoc.) The Calculate Cost output parameter Service_Rate is a document, so the GetDoc method gets it from the Output structure.

```

Local Interlink &QE_COST;
Local number &count;
Local BIDocs &CalcCostOut;
Local BIDocs &ServiceRateDoc;
Local number &ret;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_COST.GetOutputDocs("");
&ret = &CalcCostOut.GetValue("output_param1",&VALUE);
&ServiceRateDoc = &CalcCostOut.GetDoc("Service_Rate");
&ret = &ServiceRateDoc.GetValue("Service_Type", &SERVICE_TYPE);
&ret = &ServiceRateDoc.GetValue("Rate", &RATE);
/* Call GetDoc, GetValue, GetNextDoc for output_param2_List (code not shown)
*/
If &ret = 0 Then
    /* Process output values */
End-If;

```

The following illustration shows the Output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List. This is a version of the Federal Express plug-in that was modified for this example (output_param1 and output_param2_List were added).

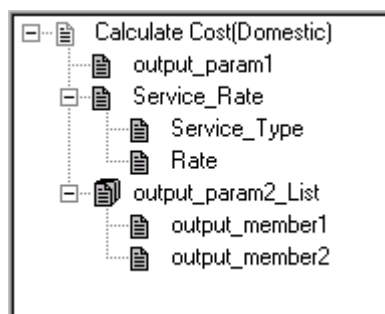

In the following example, GetDoc is used to access a document that is nested more deeply. To access a document that is more deeply nested, you can either call GetDoc for each nesting, or you can call GetDoc once using the nesting feature.


Calling GetDoc with the nesting feature:

```
Local Interlink &QE_4GETDOC;
Local BIDocs &CalcCostOut, &Docs3;
Local number &ret;
&QE_4GETDOC = GetInterlink(Interlink.QE_4GETDOC_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_4GETDOC.GetOutputDocs("");
&Docs3 = &CalcCostOut.GetDoc("Doc1.Doc2.Doc3");
&ret = &Docs3.GetValue("output_member3", &VALUE);
```

Calling GetDoc without the nesting feature:

```
Local Interlink &QE_4GETDOC;
Local BIDocs &CalcCostOut, &Docs1, &Docs2, &Docs3;
Local number &ret;
&QE_4GETDOC = GetInterlink(Interlink.QE_4GETDOC_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_4GETDOC.GetOutputDocs("");
&Docs1 = &CalcCostOut.GetDoc("Doc1");
&Docs2 = &Docs1.GetDoc("Doc2");
&Docs3 = &Docs2.GetDoc("Doc3");
&ret = &Docs3.GetValue("output_member3", &VALUE);
```

The following image is an example of output structure with nested documents.

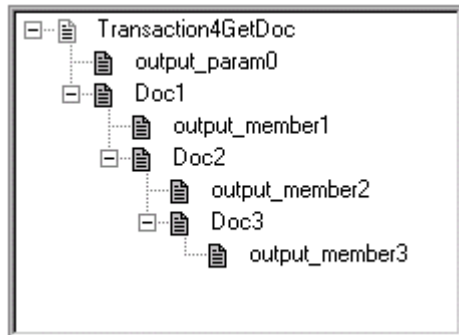

GetFieldCount method: Business Interlink class

Syntax

```
GetFieldCount()
```

Description

Use the GetFieldCount method to support dynamic output. It returns the number of columns in the output buffer, which is the same as the number of outputs in each row of the output buffer.

Note

This method can also be used with hierarchical doc data.

Parameters

None.

Returns

The number of columns in the output buffer, which is the same as the number of outputs in each row of the output buffer.

Example

The following example moves to the first column, first field of the output buffer. The Repeat loop goes through every row in the output buffer. The For loop processes every field in every row.

```
If (&MYBI.MoveFirst()) Then
  Repeat
    For &I = 1 to &MYBI.GetFieldCount
      &TYPE = &MYBI.GetFieldType(&I);
      Evaluate &TYPE
      Where = 1
      /* do processing */
      . . .
    End-Evaluate;
  End-For;
  Until Not (&MYBI.MoveNext());
Else
  /* do error processing - output buffer not returned */
End-If;
```

Related Topics

- [GetFieldType method: Business Interlink class](#)
- [GetFieldValue method: Business Interlink class](#)
- [MoveFirst method: Business Interlink class](#)
- [MoveNext method: Business Interlink class](#)
- [Using Hierarchical Data \(BIDocs\)](#)

A Business Interlink can have hierarchical data. Think of the structure as a tree, with a root doc, node docs, and values. The hierarchical data methods and objects are also referred to as BIDocs.

GetFieldType method: Business Interlink class

Syntax

GetFieldType(*index*)

Description

Use the `GetFieldType` method to support dynamic output. It returns the type of field specified by *index*. You can use this method only after you have used the `MoveFirst` method: otherwise the system doesn't know where to start.

Note

This method can also be used with hierarchical doc data.

Parameters

Parameter	Description
<i>index</i>	Specify the number of the field you want to find the type of.

Returns

A number indicating the type of the field. The values are:

Value	Description
1	String
2	Integer
3	Float
4	Boolean
5	Date
6	Time
7	DateTime
8	Binary
9	Object

Example

In the following example, the Business Interlink object name is `&MYBI`. The example uses `MoveFirst` to move to the first row of the output buffer, and to the first column, or first field, in that row. The `Repeat` loop uses `MoveNext` to go through every row in the output buffer. The `For` loop processes every field in every row, using the `GetFieldCount` method to get the number of fields, or outputs, in the row. Within the `For` loop, `GetFieldType` gets the type of the field data (string, integer, and so on.)

```
/* Add inputs to the Business Interlink object, then call Execute
to execute the Business Interlink object.
You are then ready to get the outputs using the following code. */
If (&MYBI.MoveFirst()) Then
  Repeat
    For &I = 1 to &MYBI.GetFieldCount
      &TYPE = &MYBI.GetFieldType(&I);
      Evaluate &TYPE
    Where = 1
```

```
        &STRING_VARIABLE = &MYBI.GetFieldValue(&I);  
        /* test for and process other field types */  
        End-Evaluate;  
    End-For;  
    Until Not(&MYBI.MoveNext());  
Else  
    /* Process error - no output buffer */  
End-If;
```

Related Topics

- [GetFieldCount method: Business Interlink class](#)
- [GetFieldValue method: Business Interlink class](#)
- [MoveFirst method: Business Interlink class](#)
- [MoveNext method: Business Interlink class](#)

GetFieldValue method: Business Interlink class

Syntax

GetFieldValue(*index*)

Description

Use the GetFieldValue method to support dynamic output. It returns the value of the field specified by index. You can use this method only after you have used the MoveFirst method: otherwise the system doesn't know where to start.

Note

This method can also be used with hierarchical doc data.

Parameters

Parameter	Description
<i>index</i>	Specify the number of the field you want to find the value of.

Returns

A string containing the value of the field.

Example

In the following example, the Business Interlink object name is &MYBI. The example uses MoveFirst to move to the first row of the output buffer, and to the first column, or first field, in that row. The Repeat loop uses MoveNext to go through every row in the output buffer. The For

loop processes every field in every row, using the GetFieldCount method to get the number of fields, or outputs, in the row. Within the For loop, GetFieldValue gets the value of the field data.

```
/* Add inputs to the Business Interlink object, then call Execute to execute
the Business Interlink object. You are then ready to get the
outputs using the following code. */
If (&MYBI.MoveFirst()) Then
  Repeat
    For &I = 1 to &MYBI.GetFieldCount
      &TYPE = &MYBI.GetFieldType(&I);
      Evaluate &TYPE
      Where = 1
      &STRING_VARIABLE = &MYBI.GetFieldValue(&I);
      /* test for and process other field types */
      End-Evaluate;
    End-For;
  Until Not(&MYBI.MoveNext());
Else
  /* Process error - no output buffer */
End-If;
```

Related Topics

- [GetFieldCount method: Business Interlink class](#)
- [GetFieldType method: Business Interlink class](#)
- [MoveFirst method: Business Interlink class](#)
- [MoveNext method: Business Interlink class](#)

GetInputDocs method: Business Interlink class

Syntax

```
GetInputDocs("")
```

Description

The GetInputDocs method gets the top input document at the root level for a Business Interlink object. This is a hierarchical structure that contains the values for the inputs for this Business Interlink object. The methods that you use to put the input values into this document are the hierarchical data methods.

Parameters

A null string.

Returns

An input document. This is the document at the top of the root level of the input document for a Business Interlink object.

Example

```
Local Interlink &QE_COST;
Local BIDocs &CalcCostOut, &CalcCostIn;
```

```
&QE_COST = GetInterlink(Interlink.QE_COST_EX);  
&CalcCostIn = &QE_COST.GetInputDocs("");  
/* You can now insert the input values and execute the BI object */
```

Related Topics

- [Using Hierarchical Data \(BIDocs\)](#)
A Business Interlink can have hierarchical data. Think of the structure as a tree, with a root doc, node docs, and values. The hierarchical data methods and objects are also referred to as BIDocs.

GetNextDoc method: Business Interlink class

Syntax

```
GetNextDoc()
```

Description

The GetNextDoc method gets a document from one of the following levels:

- The root level of the Output structure for a Business Interlink object. This level was accessed with the GetOutputDocs method.
- When a document within the Output structure is a list, GetNextDoc gets another document from the list. If you use GetNextDoc on a document that is not a list, GetNextDoc fails and returns an error.

Parameters

None.

Returns

The following are the valid returns:

Number	Enum Value	Description
0	eNoError	The method succeeded.
1	eNO_DOCUMENT	The document referenced by this method does not exist.
2	eDOCLIST_OUT_RANGE	You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call GetDoc/GetOutputDocs once, you can call GetNextDoc four times; the fifth time results in this error.
3	eDOCUMENT_UNINITIALIZED	Internal error
4	eNOT_DOCUMENTTYPE	You tried to perform an operation upon a parameter that is not a document type.

Number	Enum Value	Description
5	eNOT_LISTTYPE	You tried to perform a GetNextDoc or AddNextDoc upon a document that is not a list.
7	eNOT_BASICTYPE	You tried to perform a GetValue or AddValue upon a parameter that is not of basic type: Integer, Float, String, Time, Date, DateTime.
8	eNO_DATA	You tried to retrieve data from a document that contained no data.

Example


In this example, the Output structure for Calculate Cost, or the root level document, is accessed with the GetOutputDocs method. The GetNextDoc method gets another Output structure, assuming that there is more than one of them. The Calculate Cost output parameter output_param2_List is a document, so the GetDoc method gets it to the Output structure. output_param2_List is also a document list, so GetNextDoc method gets the next output_param2_List document.

```

Local Interlink &QE_COST;
Local number &count1, &count2;
Local BIDs &CalcCostOut;
Local BIDs &OutlistDoc;
Local number &ret1, &ret2;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_COST.GetOutputDocs("");
&ret1 = 0;
While (&ret1)
    &ret1 = &CalcCostOut.GetValue("output_param1",&VALUE);
    &ServiceRateDoc = &CalcCostOut.GetDoc("Service_Rate");
    &ret1 = &ServiceRateDoc.GetValue("Service_Type", &SERVICE_TYPE);
    &ret1 = &ServiceRateDoc.GetValue("Rate", &RATE);
    /* Process output values */
    &OutlistDoc = &CalcCostOut.GetDoc("output_param2_List");
    &count2 = &CalcCostOut.GetCount("output_param2_List");
    While (&I < &count2)
        &ret2 = &OutlistDoc.GetValue("output_member1", &VALUE1);
        &ret2 = &OutlistDoc.GetValue("output_member2", &VALUE2);
        If &ret2 = 0 Then
            /* Process output values */
            &I = &I + 1;
            &ret2 = &OutlistDoc.GetNextDoc();
        End-If; &ret1 = &CalcCostOut.GetNextDoc();
    End-While;

```

The following shows the Output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List.

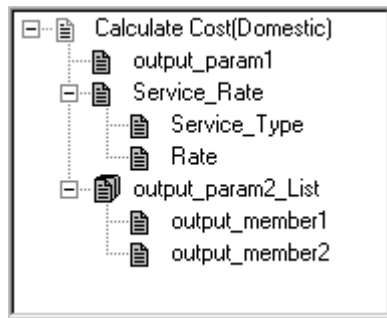

GetOutputDocs method: Business Interlink class

Syntax

```
GetOutputDocs("")
```

Description

The GetOutputDocs method gets the top output document at the root level for a Business Interlink object. This is a hierarchical structure that contains the values for the outputs for this Business Interlink object. The methods that you use to get output values from this document are the hierarchical data methods.

Parameters

A null string.

Returns

An output document. This is the document at the top of the root level of the output document for a Business Interlink object.

Example

```
Local Interlink &QE_COST;  
Local BIDocs &CalcCostIn, &CalcCostOut;  
&QE_COST = GetInterlink(Interlink.QE_COST_EX);  
&CalcCostOut = &QE_COST.GetOutputDocs("");  
/* You can now execute the Business Interlink object and get the output  
values. */
```

Related Topics

- [Using Hierarchical Data \(BIDocs\)](#)
A Business Interlink can have hierarchical data. Think of the structure as a tree, with a root doc, node docs, and values. The hierarchical data methods and objects are also referred to as BIDocs.

GetPreviousDoc method: Business Interlink class

Syntax

```
GetPreviousDoc()
```

Description

The `GetPreviousDoc` method gets the previous document from either the root level of the Output structure for a Business Interlink object, or from a document within the Output structure. When these documents are in a list, `GetPreviousDoc` gets the previous document in the list. You must get the document before you can get its values with `GetValue`.

Parameters

None.

Returns

The following are the possible returns:

Number	Enum Value	Description
0	eNoError	The method succeeded.
1	eNO_DOCUMENT	The document referenced by this method does not exist.
2	eDOCLIST_OUT_RANGE	You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call <code>GetDoc/GetOutputDocs</code> once, you can call <code>GetNextDoc</code> four times; the fifth time results in this error.
3	eDOCUMENT_UNINITIALIZED	Internal error
4	eNOT_DOCUMENTTYPE	You tried to perform an operation upon a parameter that is not a document type.
5	eNOT_LISTTYPE	You tried to perform a <code>GetNextDoc</code> or <code>AddNextDoc</code> upon a document that is not a list.
7	eNOT_BASICTYPE	You tried to perform a <code>GetValue</code> or <code>AddValue</code> upon a parameter that is not of basic type: Integer, Float, String, Time, Date, DateTime.
8	eNO_DATA	You tried to retrieve data from a document that contained no data.

Example


In this example, the Output structure for Calculate Cost, or the root level document, is accessed with the GetOutputDocs method. It contains one output parameter, output_param2_List, which is also a list. The GetCount and MoveToDoc methods point to the last output_param2_List document in the list. The GetPreviousDoc method is used in a loop to cycle through the output_param2_List list, starting with the last and ending with the first in the list, and get each output_param2_List document and its values.

```

Local Interlink &QE_COST;
Local number &count;
Local BIDocs &CalcCostOut;
Local BIDocs &OutlistDoc;
Local number &ret;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_COST.GetOutputDocs("");
/* Call GetValue for output_param1, call GetDoc, GetValue for Service_Rate
(code⇒
not shown) */
&OutlistDoc = &CalcCostOut.GetDoc("output_param2_List");
&count = &CalcCostOut.GetCount("output_param2_List");
&ret = &OutlistDoc.MoveToDoc(&count-1);
&I = &count;
While (&I > 0)
    &ret = &OutlistDoc.GetValue("output_member1", &VALUE1);
    &ret = &OutlistDoc.GetValue("output_member2", &VALUE2);
    If &ret = 0 Then
        /* Process output values */
        &I = &I - 1;
        &retoutput = &OutlistDoc.GetPreviousDoc("");
    End-If;
End-While;

```

The following shows the Output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List.

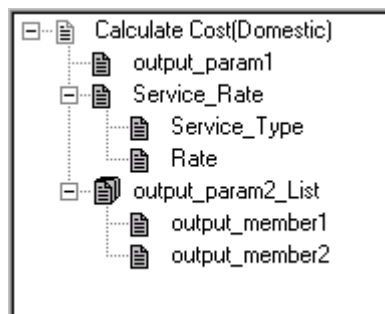

GetStatus method: Business Interlink class

Syntax

```
GetStatus()
```

Description

The GetStatus method tests the BIDocs document. To find the status for any BIDocs method that does not return a status value, call GetStatus just after you call that BIDocs method.

Parameters

None.

Returns

The following are the possible returns:

Number	Enum Value	Description
0	NoError	The method succeeded.
1	NO_DOCUMENT	The document referenced by this method does not exist.
2	LIST_OUT_RANGE	You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call GetDoc/GetOutputDocs once, you can call GetNextDoc four times; the fifth time results in this error.
3	DOCUMENT_UNINITIALIZED	Internal error.
4	NOT_DOCUMENTTYPE	You tried to perform an operation upon a parameter that is not a document type.
5	NOT_DOCUMENTLISTTYPE	You tried to perform a GetNextDoc or AddNextDoc upon a document that is not a list.
6	NOT_LISTTYPE	You tried to perform a list operation using GetValue, AddValue, on a non-list.
7	NOT_SINGLEBASICTYPE	You tried to perform a GetValue or AddValue upon a list that does not use a single basic type: Integer, Float, String, Time, Date, DateTime.
9	NO_DATA	You tried to retrieve data from a document that contained no data.
10	GENERIC_ERROR	There was an error with the transaction.

GetValue method: Business Interlink class

Syntax

GetValue(*paramname*, *value*)

Description

The GetValue method gets a value from an output parameter within a document of the Output structure for a Business Interlink object.

Parameters

Parameter	Description
<i>Paramname</i>	The name of the member of the document that is having a value retrieved from it.
<i>Value</i>	The value that is retrieved. This can be a variable or a record field. The data type can be String, Integer, Double, Float, Time, Date, or DateTime.

Returns

The following are the possible return values:

Example

In the following example, the Business Interlink object name is QE_COST.


In the following example, the Output structure for Calculate Cost, or the root level document, is created with the GetOutputDocs method. (If you wanted to create, or get, more Output structures, you would call GetNextDoc.) The Calculate Cost output parameter Service_Rate is a document, so the GetDoc method gets it from the Output structure. Then the GetValue method gets values from each of the Service_Rate document members.

```
Local Interlink &QE_COST;
Local BIDocs &CalcCostOut;
Local BIDocs &ServiceRateDoc;
Local number &ret;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_COST.GetOutputDocs("");
&ret = &CalcCostOut.GetValue("output_param1",&PARAM1);

&ServiceRateDoc = &CalcCostOut.GetDoc("Service_Rate");
&ret = &ServiceRateDoc.GetValue("Service_Type", &SERVICE_TYPE);
&ret = &ServiceRateDoc.GetValue("Rate", &RATE);

/* Call GetDoc, GetValue, GetNextDoc for output_param2_List (code not shown)
*/
```

The following illustration shows the Output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List. This is a version of the Federal Express plug-in that was modified for this example (output_param1 and output_param2_List were added).

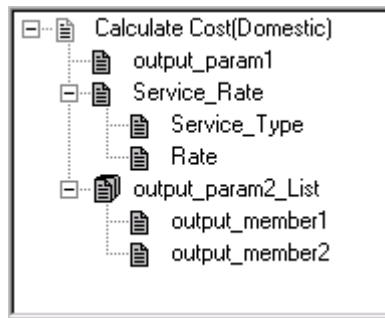

Return Status for Integer

Number	Enum value and Meaning
0	NoError. The method succeeded.
1	NO_DOCUMENT. The document referenced by this method does not exist.
9	NO_DATA. You tried to retrieve data from a document that contained no data.
10	GENERIC_ERROR. There was an error with the transaction.

InputRowset method: Business Interlink class

Syntax

`InputRowset(&Rowset)`

Description

The InputRowset method uses the data in the specified rowset to populate the input buffer, copying *like-named* fields in the appropriate structure. This method assumes that the names of the fields in the rowset match the names of the inputs defined in the Business Interlink definition, and that the structure of both rowsets are the same.

Use this method only if you have a hierarchical data structure and you want to preserve the hierarchy. Otherwise, use BulkExecute or AddInputRow.

Parameters

Parameter	Description
<code>&Rowset</code>	Specify an existing, instantiated rowset object.

Returns

An optional value: the number of rows inserted into the output buffer.

Example

The example uses the rowset on level one from the EMPLOYEE_CHECKLIST page. A PeopleCode program running in a field on level zero in that panel can access the child rowset (level one), shown below from Scroll Bar 1 to Scroll Bar 2.

	Lvl	Label	Type	Field	Record	Display Control	Related Display	Related Control
1	0	Frame	Frame			☒	☒	
2	0	Frame	Frame			☐	☐	
3	0	Frame	Frame			☐	☐	
4	0	Employee Name	Edit Box	NAME	PERSONAL_DATA	☐	☐	
5	0	ID	Edit Box	EMPLID	PERSONAL_DATA	☐	☐	
6	1	Checklist Item Tbl	Scroll Bar			☒	☒	
7	1	Checklist Sequen	Edit Box	CHECKLIST_SEQ	CHECKLIST_ITEM	☐	☐	
8	1	Scroll Bar 1	Scroll Bar			☒	☒	
9	1	Checklist Date	Edit Box	CHECKLIST_DT	EMPL_CHECKLIST	☐	☐	
10	1	derived_hr_effdt	Edit Box	EFFDT	DERIVED_HR	☐	☐	
11	1	Checklist	Edit Box	CHECKLIST_CD	EMPL_CHECKLIST	☒	☐	
12	1	Checklist Descript	Edit Box	DESCR	CHECKLIST_TBL	☐	☒	11
13	1	Responsible ID	Edit Box	RESPONSIBLE_ID	EMPL_CHECKLIST	☒	☐	
14	1	Responsible Nam	Edit Box	NAME	PERSONAL_DATA	☐	☒	13
15	1	Comment	Long Edit Box	COMMENTS	EMPL_CHECKLIST	☐	☐	
16	2	Scroll Bar 2	Scroll Bar			☒	☒	
17	2	Chklist Seq	Edit Box	CHECKLIST_SEQ	EMPL_CHKLIST_ITM	☐	☐	
18	2	Chklist itm	Edit Box	CHKLIST_ITEM_CD	EMPL_CHKLIST_ITM	☒	☐	
19	2	Briefing Descripti	Edit Box	DESCR	CHKLIST_ITEM_TBL	☐	☒	18
20	2	Briefing Status	Drop Down List	BRIEFING_STATUS	EMPL_CHKLIST_ITM	☐	☐	
21	2	Status Date	Edit Box	STATUS_DT	EMPL_CHKLIST_ITM	☐	☐	

EMPL_CHECKLIST is the primary database record for the level one scrollbar on the EMPLOYEE_CHECKLIST page. The following PeopleCode access the level one rowset using EMPL_CHECKLIST. The Business Interlink object name is QE_BI_EMPL_CHECKLIST. This Business Interlink object uses the level one rowset as its input and its output.

The InputRowset method uses this rowset as input for QE_BI_EMPL_CHECKLIST. Then a blank duplicate of the rowset is created with CreateRowset, and then the output of QE_BI_EMPL_CHECKLIST is fetched into the blank rowset with FetchIntoRowset.

```
&MYROWSET = GetRowset(SCROLL.EMPL_CHECKLIST);
&ROWCOUNT = &QE_BI_EMPL_CHECKLIST.InputRowset(&MYROWSET);
&RSLT = &QE_BI_EMPL_CHECKLIST.Execute();
/* do some error processing */
&WorkRowset = CreateRowset(&MYROWSET);
&ROWCOUNT = &QE_BI_EMPL_CHECKLIST.FetchIntoRowset(&WorkRowset);
If &ROWCOUNT = 0 Then
/* do some error processing */
Else
/* Process the rowset from QE_BI_EMPL_CHECKLIST. Check it for errors. */
For &I = 1 to &WorkRowset.RowCount
For &K = 1 to &WorkRowset(&I).RecordCount
&REC = &WorkRowset(&I).GetRecord(&K);
&REC.ExecuteEdits();
For &M = 1 to &REC.FieldCount
If &REC.GetField(&M).EditError Then
/* there are errors */
```

```

        /* do other processing */
      End-If;
    End-For;
  End-For;
End-for;
End-if;

```

Related Topics

- PeopleCode Developer's Guide: Understanding Data Buffer Access
- [FetchIntoRowset method: Business Interlink class](#)

MoveFirst method: Business Interlink class

Syntax

```
MoveFirst()
```

Description

Use the MoveFirst method to support dynamic output. This method moves your cursor to the first column, first row of the output buffer. You must use this method before you try to access any data.

Parameters

None.

Returns

Boolean: True if successfully positioned cursor at the first column, first row of the output buffer, False otherwise.

Example

In the following example, the Business Interlink object name is &MYBI. The example uses MoveFirst to move to the first row of the output buffer, and to the first column, or first field, in that row. The Repeat loop uses MoveNext to go through every row in the output buffer. The For loop processes every field in every row, using the GetFieldCount method to get the number of fields, or outputs, in the row.

```

/* Add inputs to the Business Interlink object, then call Execute to execute
the⇒
Business Interlink object. You are then ready to get the outputs using the⇒
following code. */
If (&MYBI.MoveFirst()) Then
  Repeat
    For &I = 1 to &MYBI.GetFieldCount
      &TYPE = &MYBI.GetFieldType(&I);
      Evaluate &TYPE
      Where = 1
      &STRING_VARIABLE = &MYBI.GetFieldValue(&I);
      /* test for and process other field types */
    End-Evaluate;
  End-For;

```

```
Until Not(&MYBI.MoveNext());  
Else  
    /* Process error - no output buffer */  
End-If;
```

Related Topics

- [GetFieldCount method: Business Interlink class](#)
- [GetFieldType method: Business Interlink class](#)
- [GetFieldValue method: Business Interlink class](#)
- [MoveNext method: Business Interlink class](#)

MoveNext method: Business Interlink class

Syntax

```
MoveNext()
```

Description

Use the MoveNext method to support dynamic output. This method moves your cursor to the first column of the next row of the output buffer. You can use this method only after you have used the MoveFirst method: otherwise, the system doesn't know where to start.

Parameters

None.

Returns

Boolean: True if successfully positioned cursor at the next row of the output buffer, False otherwise.

Example

In the following example, the Business Interlink object name is &MYBI. The example uses MoveFirst to move to the first row of the output buffer, and to the first column, or first field, in that row. The Repeat loop uses MoveNext to go through every row in the output buffer. The For loop processes every field in every row, using the GetFieldCount method to get the number of fields, or outputs, in the row.

```
/* Add inputs to the Business Interlink object, then call Execute to execute  
the⇒  
Business Interlink object. You are then ready to get the outputs using the⇒  
following code. */  
If (&MYBI.MoveFirst()) Then  
    Repeat  
        For &I = 1 to &MYBI.GetFieldCount  
            &TYPE = &MYBI.GetFieldType(&I);  
            Evaluate &TYPE  
            Where = 1  
                &STRING_VARIABLE = &MYBI.GetFieldValue(&I);  
            /* test for and process other field types */  
        End-Evaluate;
```

```
        End-For;  
        Until Not(&MYBI.MoveNext());  
    Else  
        /* Process error - no output buffer */  
    End-If;
```

Related Topics

- [GetFieldCount method: Business Interlink class](#)
- [GetFieldType method: Business Interlink class](#)
- [GetFieldValue method: Business Interlink class](#)
- [MoveFirst method: Business Interlink class](#)

MoveToDoc method: Business Interlink class

Syntax

```
MoveToDoc(list_number)
```

Description

Within a list of documents in the Output structure, the MoveToDoc method moves to the documents given by the parameter *list_number*. After using MoveToDoc, the GetValue method gets the values of the document that is in the *list_number*+1 location in the list.

Parameters

Parameter	Description
<i>list_number</i>	The number indicating the document that MoveToDoc moves to. After using MoveToDoc, the GetValue method gets the values of the document that is in the <i>list_number</i> +1 location in the list. For example, if <i>list_number</i> is zero, then MoveToDoc moves to the first document in the list.

Returns

This method returns an integer. The values are:

Value	Description
0	eNoError. The method succeeded.
1	eNO_DOCUMENT. The document referenced by this method does not exist.
2	eDOCLIST_OUT_RANGE. You tried to access a document in a list, but the document list is out of range. For example, if a document list contains five documents, and then you call GetDoc/GetOutputDocs once, you can call GetNextDoc four times; the fifth time results in this error.
3	eDOCUMENT_UNINITIALIZED. Internal error.

Value	Description
4	eNOT_DOCUMENTTYPE. You tried to perform an operation upon a parameter that is not a document type.
5	eNOT_LISTTYPE. You tried to perform a GetNextDoc or AddNextDoc upon a document that is not a list.
7	eNOT_BASICTYPE. You tried to perform a GetValue or AddValue upon a parameter that is not of basic type: Integer, Float, String, Time, Date, DateTime.
8	eNO_DATA. You tried to retrieve data from a document that contained no data.

Example


The following example gets the values of the last document in the output_param2_List list. It uses GetCount to get the number of documents in the list, and then uses MoveToDoc to move to the last document in the list.

```

Local Interlink &QE_COST;
Local number &count;
Local BIDocs &CalcCostOut;
Local BIDocs &OutlistDoc;
Local number &ret;
&QE_COST = GetInterlink(Interlink.QE_COST_EX);
// Get inputs, execute. (code not shown)
&CalcCostOut = &QE_COST.GetOutputDocs("");
&OutlistDoc = &CalcCostOut.GetDoc("output_param2_List");
&count = &CalcCostOut.GetCount("output_param2_List");
&ret = &OutlistDoc.MoveToDoc(&count-1);
&ret = &OutlistDoc.GetValue("output_member1", &VALUE1);
&ret = &OutlistDoc.GetValue("output_member2", &VALUE2);

```

The following illustration shows the Output structure for this example. It contains three output parameters: output_param1, Service_Rate, and output_param2_List. This is a version of the Federal Express plug-in that was modified for this example (output_param1 and output_param2_List were added).

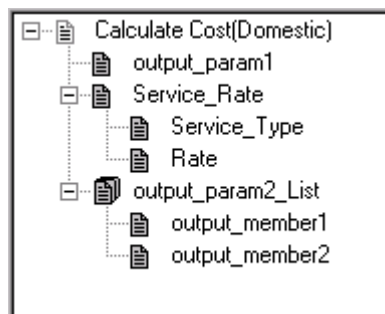

ResetCursor method: Business Interlink class

Syntax

```
ResetCursor()
```

Description

The ResetCursor method resets the cursor in the Output structure for a Business Interlink object to the top. After you call this method, the next time you call GetValue, you get an output value from the first document of the Output structures for a Business Interlink object.

Parameters

None.

Returns

None.

Example

The following code uses ResetCursor to reset the cursor in the Output structure to the top.

```
Local Interlink &QE_COST;  
Local BIDocs &CalcCostOut;  
&QE_COST = GetInterlink(Interlink.QE_COST_EX);  
// Get inputs, execute. (code not shown)  
&CalcCostOut = &QE_COST.GetOutputDocs("");  
// Perform actions on the output documents (code not shown)  
&CalcCostOut.ResetCursor();
```

Incoming Business Interlink Methods

This section describes the PeopleCode methods you use with Incoming Business Interlinks.

AddAttribute method: Incoming Business Interlink class

Syntax

```
AddAttribute(attributename, attributevalue)
```

Description

The AddAttribute method adds an attribute name and its value to an XML element referenced by a BiDocs object.

Parameters

Parameter	Description
<i>attributename</i>	String. The name of the attribute.

Parameter	Description
<i>attributevalue</i>	String. The value of the attribute.

Returns

Number. The return status. NoError, or 0, means the method succeeded.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
  <postreqresponse>
    <candidate>
      <user>
        <location scenery="great" density="low" blank="eh?">
        </location>
      </user>
    </candidate>
  </postreqresponse>
```

Here is the PeopleCode that builds it.

```
Local BIDocs &rootDoc, &postreqresponse;
Local BIDocs &candidates, &location, &user;
Local number &ret;
&rootDoc = GetBiDoc("");
&ret = &rootDoc.AddProcessInstruction("<?xml version=\"1.0\"?>");
&postreqresponse = &rootDoc.CreateElement("postreqresponse");
&candidates = &postreqresponse.CreateElement("candidates");
&user = &candidates.CreateElement("user");
&location = &user.CreateElement("location");
&ret = &location.AddAttribute("scenery", "great");
&ret = &location.AddAttribute("density", "low");
&ret = &location.AddAttribute("blank", "eh?");
```

Related Topics

- [GetStatus method: Business Interlink class](#)

AddComment method: Incoming Business Interlink class

Syntax

AddComment(*comment*)

Description

The AddComment method adds an XML comment after the beginning tag of an XML element referenced by a BiDoc object.

Parameters

Parameter	Description
<i>comment</i>	String. The comment.

Returns

Number. The return status. NoError, or 0, means the method succeeded.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
  <postreqresponse>
    <error>
      <!--this is a comment line-->
      <errorcode>1</errorcode>
      <errortext></errortext>
    </error>
  </postreqresponse>
```

Here is the PeopleCode that builds it.

```
Local BiDocs &rootDoc, &postreqresponse, &error, &errorcode, &errortext;
Local string &blob;
Local number &ret;
&rootDoc = GetBiDoc("");
/* add a processing instruction*/
&ret = &rootDoc.AddProcessInstruction("<?xml version=\"1.0\"?>");
/* create an element and add text*/
&postreqresponse = &rootDoc.CreateElement("postreqresponse");
&error = &postreqresponse.CreateElement("error");
&ret = &error.AddComment("this is a comment line");
&errorcode = &error.CreateElement("errorcode");
&ret = &errorcode.AddText("1");
&errortext = &error.CreateElement("errortext");
```

Related Topics

- [GetStatus method: Business Interlink class](#)

AddProcessInstruction method: Incoming Business Interlink class

Syntax

AddProcessInstruction(*instruction*)

Description

The AddProcessInstruction method adds an XML processing instruction to a BiDocs object. Use this method at the root level of the BiDocs object for Incoming Business Interlinks before you add anything else to the BiDocs object.

Parameters

Parameter	Description
<i>instruction</i>	String. The processing instruction.

Returns

Number. The return status. NoError, or 0, means the method succeeded.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
  <postreqresponse>
    <error>
      <!--this is a comment line-->
      <errorcode>1</errorcode>
      <errortext></errortext>
    </error>
  </postreqresponse>
```

Here is the PeopleCode that builds it.

```
Local BIDocs &rootDoc, &postreqresponse;
Local BIDocs &error, &errorcode, &errortext;
Local number &ret;
&rootDoc = GetBiDoc("");
/* add a processing instruction*/
&ret = &rootDoc.AddProcessInstruction("<?xml version=\"1.0\"?>");
/* create an element and add text*/
&postreqresponse = &rootDoc.CreateElement("postreqresponse");
&error = &postreqresponse.CreateElement("error");
&ret = &error.AddComment("this is a comment line");
&errorcode = &error.CreateElement("errorcode");
&ret = &errorcode.AddText("1");
&errortext = &error.CreateElement("errortext");
```

Related Topics

- [GetStatus method: Business Interlink class](#)

AddText method: Incoming Business Interlink class

Syntax

```
AddText(text)
```

Description

The AddText method adds text to an XML element referenced by a BiDocs object.

Parameters

Parameter	Description
<i>text</i>	String. The text.

Returns

Number. The return status. NoError, or 0, means the method succeeded.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
  <postreqresponse>
    <error>
      <!--this is a comment line-->
      <errorcode>1</errorcode>
      <errortext></errortext>
    </error>
  </postreqresponse>
```

Here is the PeopleCode that builds it.

```
Local BIDocs &rootDoc, &postreqresponse;
Local BIDocs &error, &errorcode, &errortext;
Local number &ret;
&rootDoc = GetBiDoc("");
/* add a processing instruction*/
&ret = &rootDoc.AddProcessInstruction("<?xml version=\"1.0\"?>");
/* create an element and add text*/
&postreqresponse = &rootDoc.CreateElement("postreqresponse");
&error = &postreqresponse.CreateElement("error");
&ret = &error.AddComment("this is a comment line");
&errorcode = &error.CreateElement("errorcode");
&ret = &errorcode.AddText("1");
&errortext = &error.CreateElement("errortext");
```

Related Topics

- [GetStatus method: Business Interlink class](#)

CreateElement method: Incoming Business Interlink class

Syntax

CreateElement(*elementname*)

Description

The CreateElement method creates an XML element with the given name within a BiDoc object.

Parameters

Parameter	Description
<i>elementname</i>	String. The XML element name.

Returns

BiDocs. The reference to the created element.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
  <postresponse>
    <error>
      <errorcode>1</errorcode>
      <errortext></errortext>
    </error>
  </postresponse>
```

Here is the PeopleCode that builds it.

```
Local BiDocs &rootDoc, &postresponse;
Local BiDocs &error, &errorcode, &errortext;
Local number &ret;
&rootDoc = GetBiDoc("");
/* add a processing instruction*/
&ret = &rootDoc.AddProcessInstruction("<?xml version=""1.0""?>");
/* create an element and add text*/
&postresponse = &rootDoc.CreateElement("postresponse");
&error = &postresponse.CreateElement("error");
&errorcode = &error.CreateElement("errorcode");
&ret = &errorcode.AddText("1");
&errortext = &error.CreateElement("errortext");
```

GenXMLString method: Incoming Business Interlink class

Syntax

```
GenXMLString()
```

Description

The GenXMLString method creates an XML string from a BiDocs object. The BiDocs object must contain the shape and data needed for an XML string. This is part of the Incoming Business Interlink functionality, which enables PeopleCode to receive an XML request and return an XML response.

Parameters

None.

Returns

String. The XML string containing the shape and data of the BiDocs object. For example, you can use this method to create an XML string containing an XML response.

Example

The following example takes a BiDocs structure that contains an XML response and puts that into a text string. After this is done, the %Response.Write function can send this as an XML response.

```
Local BiDocs &rootDoc;  
Local string &xmlString;  
/* Create a BiDoc structure containing the data and shape of your XML  
response ⇒  
(code not shown) */  
/* Generate the XML string containing the data and shape of your XML response  
from⇒  
the BiDoc structure */  
&xmlString = &rootDoc.GenXMLString();  
%Response.Write(&xmlString);
```

GetAttributeName method: Incoming Business Interlink class

Syntax

GetAttributeName(*attributenum*)

Description

The GetAttributeName method gets the name of an attribute within an XML element referenced by a BiDocs object.

Parameters

Parameter	Description
<i>attributenum</i>	Number. The index number of the attribute.

Returns

String. The name of the attribute.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>  
  <postreq>  
    <email>joe_blow@example.com</email>  
    <location scenery="great" density="low" blank="eh?">  
      <city>San Rafael</city>  
      <state>CA</state>  
      <zip>94522</zip>
```



```
        <country>US</country>
    </location>
</postreq>
```

Here is the PeopleCode that gets the name of the second attribute in the location node. &attrName is density.

```
Local BiDocs &rootInDoc, &postreqDoc, &locationDoc;
Local string &blob, &attrName;
&blob = %Request.GetContentBody();
&rootInDoc = GetBiDoc(&blob);
&postreqDoc = &rootInDoc.GetNode("postreq");
&locationDoc = &postreqDoc.GetNode("location");
&attrName = &locationDoc.GetAttributeName(2);
```

GetAttributeValue method: Incoming Business Interlink class

Syntax

```
GetAttributeValue({attributename | attributenum})
```

Description

The GetAttributeValue method gets the value of an attribute within an XML element referenced by a BiDocs object.

Parameters

Parameter	Description
<i>attributenum</i> <i>attributename</i>	Specify the attribute that you want to get the value for. You can specify either the attribute number (1 for the first attribute, 2 for the second, and so on) or the attribute name (an XML tag.)

Returns

String. The value of the attribute.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>
  <postreq>
    <email>joe_blow@example.com</email>
    <location scenery="great" density="low" blank="eh?">
      <city>San Rafael</city>
      <state>CA</state>
      <zip>94522</zip>
      <country>US</country>
    </location>
  </postreq>
```

Here is the PeopleCode that gets the value of the second attribute in the location node. &attrValue is low.

```
Local BIDocs &rootInDoc, &postreqDoc, &locationDoc;  
Local string &blob, &attrValue;  
&blob = %Request.GetContentBody();  
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode("postreq");  
&locationDoc = &postreqDoc.GetNode("location");  
&attrValue = &locationDoc.GetAttributeValue(2);
```

GetNode method: Incoming Business Interlink class

Syntax

```
GetNode({nodename | nodenumber})
```

Description

The GetNode method returns a BiDocs reference to a child XML node (element or comment). Use the GetNode method upon a BiDocs reference to an XML element to access the child nodes for that element.

Parameters

Parameter	Description
<i>nodenumber</i> <i>nodename</i>	Specify the node that you want to reference. You can specify either a node number (the first node is 1, the second 2, and so on) or a node name (that is, the XML tag.)

Returns

BiDocs. The returned XML element within a BiDocs object.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>  
  <postreq>  
    <email>joe_blow@example.com</email> <projtitle>  
      <projsubtitle>first_subtitle</projsubtitle>  
      <projsubtitle>second_subtitle</projsubtitle>  
    <projsubtitle>third_subtitle</projsubtitle>  
    </projtitle>  
  </postreq>
```

Here is the PeopleCode that gets the postreqDoc element and the projtitle element.

```
Local BIDocs &rootInDoc, &postreqDoc, &projtitleDoc;  
Local string &name, &blob;  
&blob = %Request.GetContentBody();
```

```
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode("postreq");  
&projtitleDoc = &postreqDoc.GetNode("projtitle");
```

Here is the PeopleCode that gets the postreqDoc element, the projtitle element, and the third projsubtitle element.

```
Local BiDocs &rootInDoc, &postreqDoc, &projtitleDoc, &projsubtitleDoc;  
Local string &name, &blob;  
&blob = %Request.GetContentBody();  
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode(1);  
&projtitleDoc = &postreqDoc.GetNode(2);  
&projsubtitleDoc = &projtitleDoc.GetNode(3);
```

To parse a list of elements like <projsubtitle>, where elements have the same name, you must call GetNode using an index number rather than the element name.

ParseXMLString method: Incoming Business Interlink class

Syntax

```
ParseXMLString(XMLstring [, DTDValidation])
```

Description

The ParseXMLString methods fills an existing BiDocs object with the data and shape from an XML string. This is part of the Incoming Business Interlink functionality, which enables PeopleCode to receive an XML request and return an XML response.

Parameters

Parameter	Description
<i>XMLstring</i>	A string containing an XML document.
<i>DTDValidation</i>	Specify whether to validate a document type definition (DTD.) This parameter takes a Boolean value. If you specify true, the DTD validation occurs if a DTD is provided. If you specify false, and if a DTD is provided, it is ignored and the XML isn't validated against the DTD. The default value for this parameter is false. In the case of application messaging, if a DTD is provided, it's always ignored and the XML isn't validated against the DTD. If the XML cannot be validated against a DTD, an error is thrown saying that there was an XML parse error.

Returns

Number. The return status. NoError, or 0, means the method succeeded.

Example

The following example gets an XML request, creates an empty BiDoc, and then fills the BiDoc with the data and shape contained in the XML string. After this is done, the GetDoc method and the GetValue method can get the value of the skills XML element, which is contained within the postreq element in the XML request.

```
Local BIDs &rootInDoc, &postreqDoc;  
Local string &blob;  
Local number &ret;  
&blob = %Request.GetContentBody();  
/* process the incoming xml(request)- Create a BiDoc and fill with the  
request*/  
&rootInDoc = GetBiDoc("");  
&ret = &rootInDoc.ParseXMLString(&blob);  
&postreqDoc = &rootInDoc.GetDoc("postreq");  
&ret = &postreqDoc.GetValue("skills", &skills);
```

Related Topics

- [GetStatus method: Business Interlink class](#)

Incoming Business Interlink Properties

This section describes the PeopleCode properties you use with Incoming Business Interlinks.

AttributeCount property: Incoming Business Interlink class

Description

The AttributeCount property gets the number of attributes within an XML element referenced by a BiDocs object.

This property is read-only.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>  
  <postreq>  
    <email>joe_blow@example.com</email>  
    <location scenery="great" density="low" blank="eh?">  
      <city>San Rafael</city>  
      <state>CA</state>  
      <zip>94522</zip>  
      <country>US</country>  
    </location>  
  </postreq>
```

Here is the PeopleCode that gets the number of attributes in the location XML element. &count should be 3, for scenery, density, and blank.

```
Local BIDocs &rootInDoc, &postreqDoc, &locationDoc;  
Local string &blob;  
Local number &count;  
&blob = %Request.GetContentBody();  
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode("postreq");  
&locationDoc = &postreqDoc.GetNode("location");  
&count = &locationDoc.AttributeCount;
```

ChildNodeCount property: Incoming Business Interlink class

Description

The ChildNodeCount property returns the number of XML child nodes within the element referenced by the BiDocs object. Child nodes include XML elements, comments, and processing instructions.

This property is read-only.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>  
  <postreq>  
    <email>joe_blow@example.com</email>  
    <projtitle>  
      <!--this is a comment line-->  
      <projsubtitle>first_subtitle</projsubtitle>  
      <projsubtitle>second_subtitle</projsubtitle>  
      <projsubtitle>third_subtitle</projsubtitle>  
    </projtitle>  
  </postreq>
```

Here is the XML code that gets the number of nodes within <postreq> and <projtitle>. &count1 is 2, for <email> and <projtitle>, and &count2 is 4, for the three <projsubtitle> nodes and the comment node.

```
Local BIDocs &rootInDoc, &projtitleDoc;  
Local string &blob;  
Local number &count1, &count2;  
&blob = %Request.GetContentBody();  
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode("postreq");  
&count1 = &postreqDoc.ChildNodeCount;  
&projtitleDoc = &postreqDoc.GetNode("projtitle");  
&count2 = &projtitleDoc.ChildNodeCount;
```

NodeName property: Incoming Business Interlink class

Description

The NodeName property gets the name of an XML element referenced by a BiDocs object. Use this to get the name of an XML element when you used GetNode with an index number to retrieve it (meaning that you did not have the name of the XML element when you used GetNode).

This property is read-only.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>
  <postreq>
    <email>joe_blow@example.com</email>
    <projtitle>
      <projsubtitle>first_subtitle</projsubtitle>
      <projsubtitle>second_subtitle</projsubtitle>
      <projsubtitle>third_subtitle</projsubtitle>
    </projtitle>
  </postreq>
```

Here is the PeopleCode that gets the name of the <email> element, email.

```
Local BiDocs &rootInDoc, &postreqDoc, &emailDoc;
Local string &emailName, &blob;
&blob = %Request.GetContentBody();
&rootInDoc = GetBiDoc(&blob);
&postreqDoc = &rootInDoc.GetNode(1);
&emailDoc = &postreqDoc.GetNode(1);
&emailName = &emailDoc.NodeName;
```

NodeType property: Incoming Business Interlink class

Description

The NodeType property returns the type of an XML tag within a BiDocs object as an integer. The values are:

Value	Description
1	Element (a normal XML tag)
7	Processing instruction
8	Comment

This property is read-only.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>
  <postreq>
    <email>joe_blow@example.com</email> <!--this is a comment-->
    <projtitle>
      <projsubtitle>first_subtitle</projsubtitle>
      <projsubtitle>second_subtitle</projsubtitle>
      <projsubtitle>third_subtitle</projsubtitle>
    </projtitle>
  </postreq>
```

Here is the PeopleCode that gets types: &xmlprocType is 7 for processing instruction, postreqDoc is 1 for element, and commentType is 8 for comment.

```
Local BIDocs &rootInDoc, &postreqDoc, &commentDoc;
Local number &xmlprocType, &postreqType, &commentDoc;
Local string &blob;
&blob = %Request.GetContentBody();
/* <?xml version="1.0"?> */
&rootInDoc = GetBiDoc(&blob);
&xmlprocType = &rootInDoc.NodeType;

/* <postreq> */
&postreqDoc = &rootInDoc.GetNode(1);
&postreqType = &postreqDoc.NodeType;

/* <!--this is a comment--> */
&commentDoc = &postreqDoc.GetNode(2);
&commentType = &commentDoc.NodeType;
```

NodeValue property: Incoming Business Interlink class

Description

The NodeValue property returns the value of a node within an XML document as a string.

This property is read-only.

Example

Here is a set of XML request code.

```
<?xml version="1.0"?>
  <postreq>
    <email>joe_blow@example.com</email>
    <projtitle>
      <projsubtitle>first_subtitle</projsubtitle>
      <projsubtitle>second_subtitle</projsubtitle>
      <projsubtitle>third_subtitle</projsubtitle>
    </projtitle>
  </postreq>
```

Here is the PeopleCode that gets the value of the third <projsubtitle> element, third_subtitle.

```
Local BIDocs &rootInDoc, &postreqDoc, &projtitleDoc, &projsubtitleDoc;  
Local string &name, &blob;  
&blob = %Request.GetContentBody();  
&rootInDoc = GetBiDoc(&blob);  
&postreqDoc = &rootInDoc.GetNode(1);  
&projtitleDoc = &postreqDoc.GetNode(2);  
&projsubtitleDoc = &projtitleDoc.GetNode(3);  
&projsubtitleName = &projsubtitleDoc.NodeValue;
```

Business Interlink Class Property

This section explains the StopAtError property.

StopAtError property: Business Interlink class

Description

The StopAtError property specifies whether the execution of the PeopleCode program stops when there's an error, or if the PeopleCode program tries to capture the errors.

This property takes a Boolean value: True to halt execution of your PeopleCode program at an error, False to continue executing. The default value is True.

This property is read/write.

Example

```
&QE_RP_SRAALL_1.StopAtError = False;
```

Configuration Parameters

There are two types of configuration parameters: the ones defined by the Interlink plug-in the Business Interlink definition is based on, and the ones that are standard, that is, defined for every Business Interlink object.

All configuration parameters must be set before you add any data to the input buffers.

Interlink Plug-in Configuration Parameters

The configuration parameters defined by the Interlink plug-in are accessed as if they were properties on the Business Interlink object. That is, in PeopleCode, you assign the value of a configuration parameter by using the Business Interlink object followed by a dot and the configuration parameter, in this format:

```
&MYINTERLINK.parameter = value;
```

You can also return the value of a configuration parameter:

```
&MYVALUE = &MYINTERLINK.parameter;
```


Each Business Interlink plug-in has its own set of configuration parameters. For example, the email project uses configuration parameters of SMTP_MAIL_SERVER, POP3MAIL_SERVER, LOGIN_NAME, PASSWORD, SENDERS_EMAIL_ADDRESS and REPLY_EMAIL_ADDRESS, while the Red Pepper transaction driver uses SERVER_NAME, RSERVER_HOST, RSERVER_PORT, and TIMEOUT.

You can specify default values for every configuration parameter in the Business Interlink definition (created in Application Designer.) These values are used if you create a PeopleCode "template" by dragging the Business Interlink definition from the Project window in Application Designer to an open PeopleCode editor window.

In the following example, the Interlink object name is QE_RP_SRAALL_1, and the driver is the Red Pepper driver:

```
&QE_RP_SRAALL_1.SERVER_NAME = "server";  
&QE_RP_SRAALL_1.RSERVER_HOST = "pt-sun02.example.com";  
&QE_RP_SRAALL_1.RSERVER_PORT = "9884";  
&QE_RP_SRAALL_1.TIMEOUT = 999;  
&QE_RP_SRAALL_1.URL = "HTTP://www.example.com";  
&QE_RP_SRAALL_1.StopAtError = False;
```

URL Configuration Parameter

Specifies the location and name of the Business Interlink plug-in to be used to connect to the external system. This configuration parameter takes a string value.

If the plug-in is located on a web server, you have to specify the name of the web server.

If you specify a file, you can specify either a relative or an absolute path:

- If you specify an absolute path, you must specify the drive letter:

```
&MYBI.URL = "File://D:\TEMP.MYDLL";
```

- If you specify a relative path, just use the file name:

```
&MYBI.URL = "File://TEMP.MYDLL";
```

If you specify a relative path, the system firsts looks for the file in the Location directory (specified by the user when the Business Interlink was first created), then it looks in the directory where PeopleTools is installed, in the PSTOOLS/Interface Drivers directory.

BIDocValidate Configuration Parameter

Specifies whether the system should verify whether the hierarchical data object (BIDoc) exists before adding or getting values from it. This configuration parameter takes a Boolean value: True if the system should verify before accessing the object, False otherwise.

The default value is True.

If this configuration parameter is specified as True, and the object specified doesn't exist, the PeopleCode program halts execution and an error is displayed.

Charting Classes

Understanding the Charting Classes


PeopleTools delivers multiple charting classes to address specific charting needs. An overview of each charting class is provided in following sections.

Chart Classes

- **Chart class**
Use the Chart class to visually display data series in common formats, including bar charts, line charts, pie charts, bubble charts, and funnel charts.
- **ChartClientState class**
The ChartClientState class is used in conjunction with the Chart class to manage and maintain user-selected data items on charts.
- **Series class**
The Series class is used in conjunction with the Chart class to override the default chart type (as defined for the Chart object) for each specified data series. Using the Series class allows you to create combination (or overlay) type charts.
- **ToolTipLabel class**
The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on charts thereby overriding the default tooltips that are automatically created from the chart data.
- **ReferenceArea class**
The ReferenceArea class is used in conjunction with the Chart class to display bands of color to be drawn with the chart based on numeric values along a chart axis. For each band of color, you would create a separate instance of the ReferenceArea class.
- **ReferenceLine class**
The ReferenceLine class is used in conjunction with the Chart class to display colored lines to be drawn with the chart based on numeric values along a chart axis. For each reference line, you would create a separate instance of the ReferenceLine class.

This chart was created from the Chart class with a chart type of bar:

Recreational Product Sales by Region

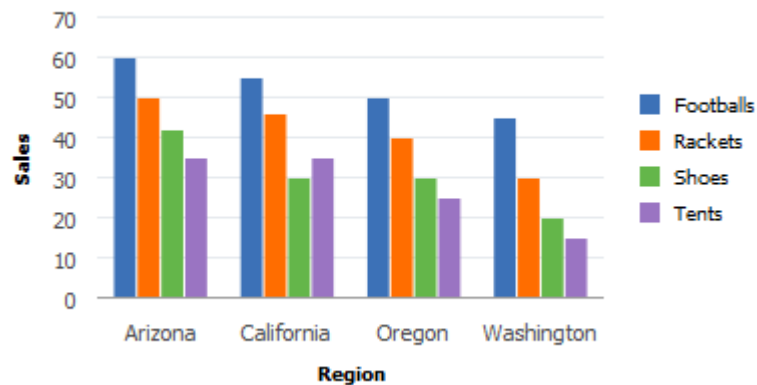


Related Topics

- [Creating PeopleSoft Charts](#)
 This section discusses the process of creating charts using any of the PeopleSoft charting classes. Further details can be found in the specific section for each chart class.
- [Using the Chart Class](#)
 Use the Chart class to create charts that display data series in several common formats, including bar charts, line charts, pie charts, and others.

Gantt Class

Use the Gantt class to create interactive Gantt charts that enable you to display and edit project and task information.

This chart created from the Gantt class shows both the task area and chart area of a Gantt chart:

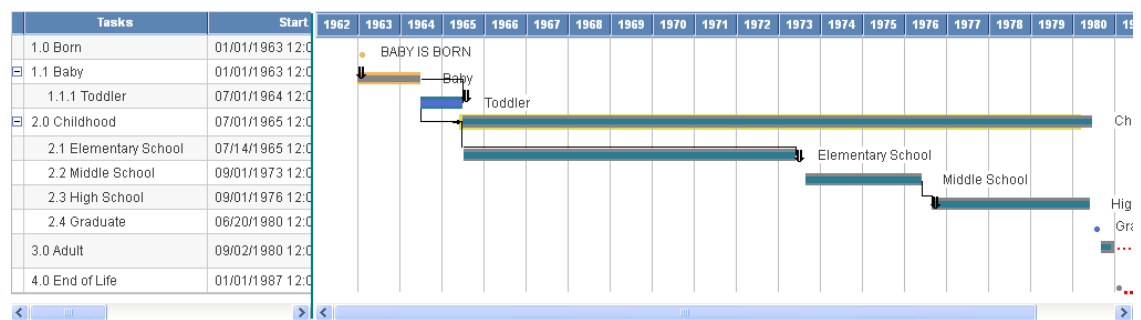

Related Topics

- [Using the Gantt Class](#)
 Use the Gantt class to create Gantt charts. A Gantt chart displays tasks and milestones along a time line. Gantt charts are frequently used in project management because they provide a graphical illustration of a schedule, which helps in planning, coordinating, and tracking project tasks.

Gauge Classes

The gauge classes are:

- LEDGauge class.
- RatingGauge, RatingGaugeState, and GaugeThreshold classes.
- StatusMeterGauge class.
- Threshold class.

Use the gauge classes to create gauges that display metrics in several common formats, including status meters, ratings, and LEDs.

The Threshold class is used in conjunction with the gauge classes: LEDGauge and StatusMeterGauge. The Threshold class provides a way to add reference areas and color coding to your gauges.

Related Topics


- [Using the Gauge Classes](#)

This section provides an overview of gauge terms and gauge types, and discusses how to use the gauge classes

OrgChart Class

Use the OrgChart class to create interactive organization charts that enable you to visually represent a hierarchy of information as a series of connected nodes.

This chart created from the OrgChart class shows an organization chart:

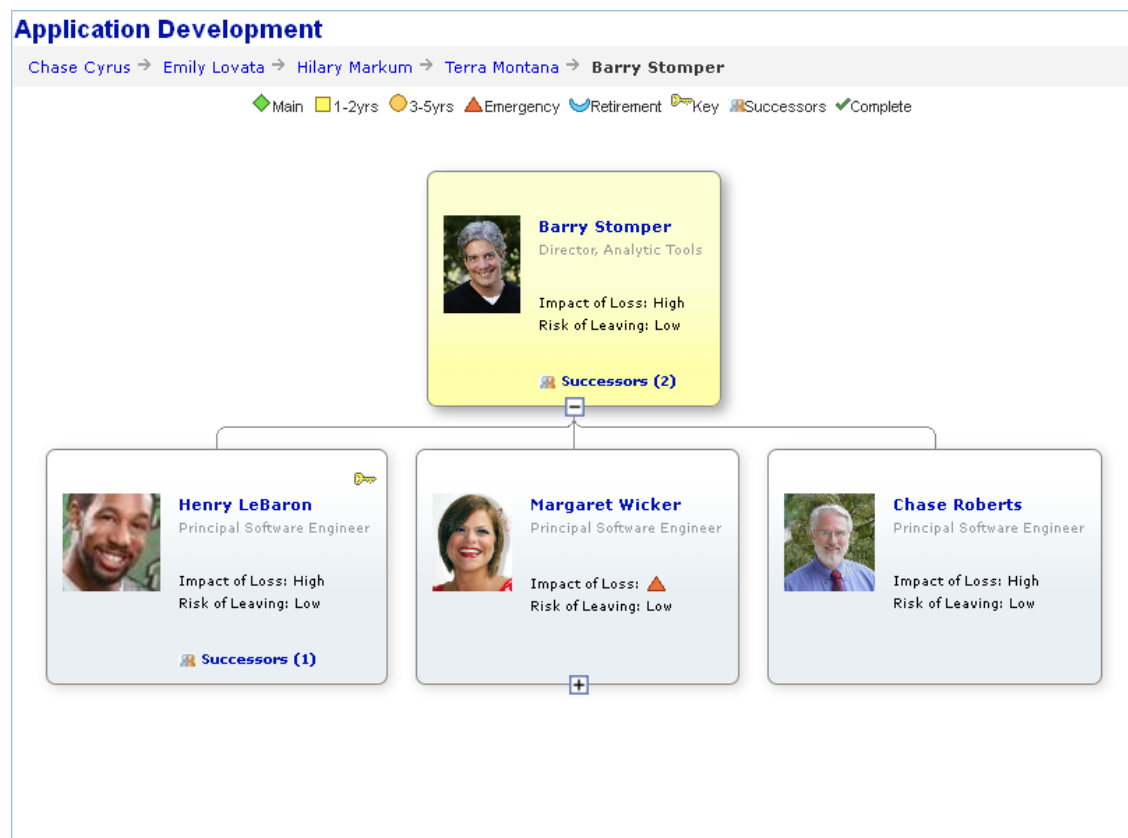

Related Topics


- [Using the OrgChart Class](#)

Use the OrgChart class to create organization charts. An organization chart represents hierarchical data as boxes arrayed in levels, which can be oriented top to bottom, with horizontal rows, or left to right, with vertical rows. Connectors show parent and child relationships between boxes on adjacent levels.

RatingBoxChart Class

Use the RatingBoxChart class to create rating box charts that enable you to display and manipulate points of information in two-dimensional bins.

This chart created from the RatingBoxChart class shows a rating box chart:

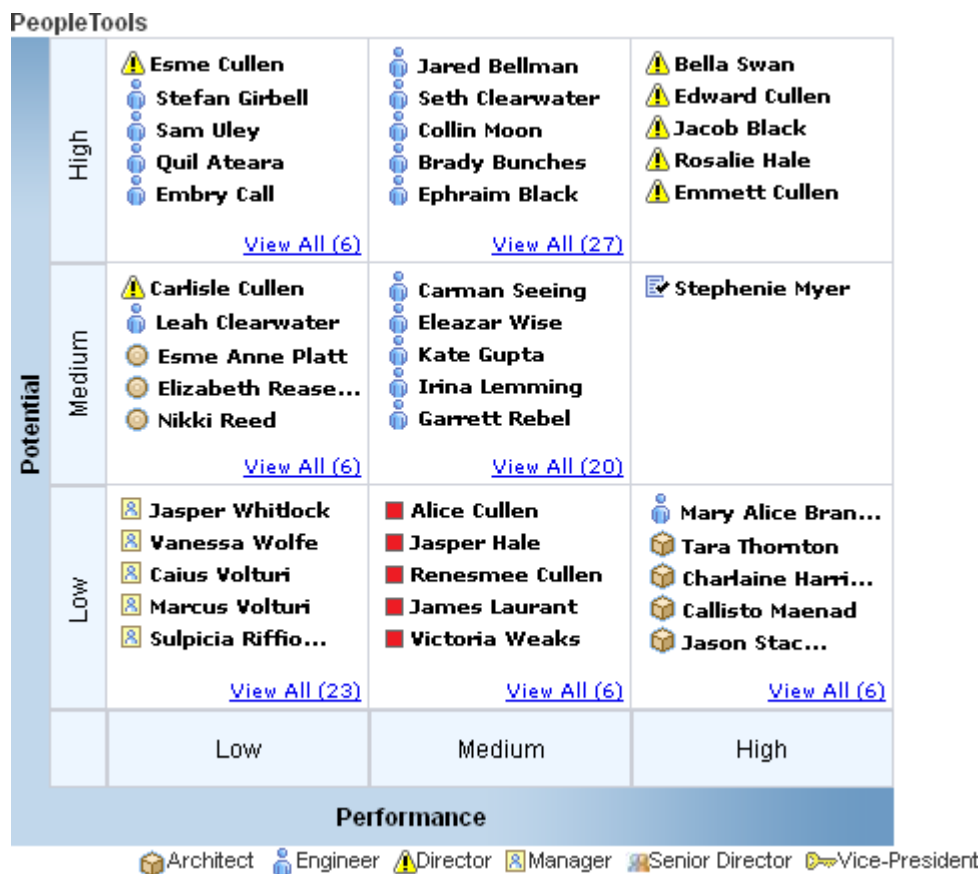

Related Topics


- [Using the RatingBoxChart Class](#)

A rating box chart is an interactive chart that displays nodes on a two-dimensional grid. If drag-and-drop is enabled for the chart, a user can move the nodes from one quadrant to another on the grid. When the user moves a node, the underlying data is updated automatically.

Spark Chart Class

Use the SparkChart class with the SpartChartItem class to create visualizations of the trend of a data set in a compact form factor.

The following example illustrates five spark chart types: an area chart, a bar chart, a floating bar chart, a line chart, and a line with area chart.

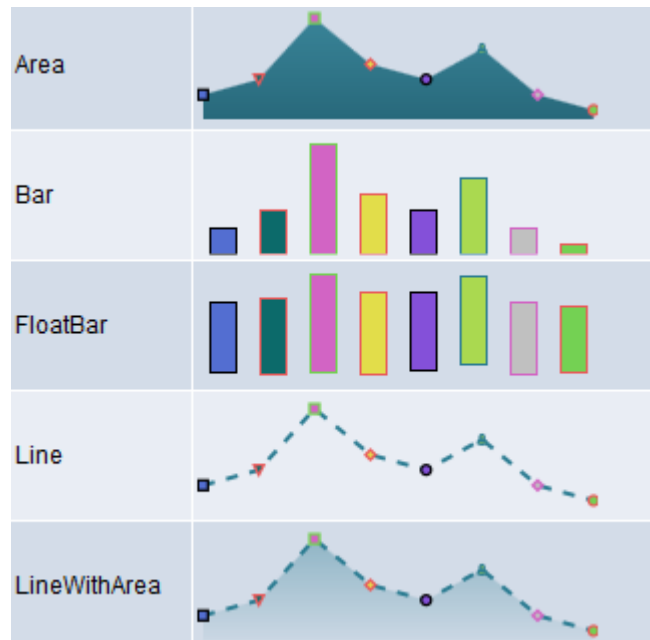

Related Topics

- [Using the Spark Chart Classes](#)

Spark charts are used to visualize the trend of a data set in a compact form factor. They are best used to view trends over time, especially when paired with additional context such as in a table. Absolute values and individual data points are not emphasized, so spark charts should not be used to visualize data where such things are important.

Creating PeopleSoft Charts

This section discusses the process of creating charts using any of the PeopleSoft charting classes. Further details can be found in the specific section for each chart class.

The topics discussed in this section relate to all of the charting classes.

Creating a Chart on a Page

This section summarizes the basic steps to create a chart. The basic steps are essentially the same for all charting classes.

At the end of this chapter are examples of charts with step-by-step instructions and complete PeopleCode programs.

The Chart class section has fundamental, detailed instructions for creating a chart using the Chart class. Each specialized class – Gantt class, OrgChart class, and RatingBoxChart class – has detailed instructions that build on the Chart class instructions.

Note

The following steps are for creating a chart on a PeopleSoft application page. You can also create a chart for a web page using an iScript. Only Chart class charts can be created using an iScript.

See [Creating a Chart Using an iScript](#).

To create a chart on a page:

1. In Application Designer, place a chart control on a page and associate the chart with a record field.
2. Create a record to hold your chart data.

For charts made using the OrgChart class and the RatingBoxChart class, you also create a record that controls the appearance of the chart. Place each record on a level-1 grid on the page so the chart records are present in the component buffer at runtime. You can optionally hide the grid. You can also optionally place the grid on another page on the same component.

Place the page on a component and register the component.

3. Add PeopleCode, probably on the page Activate event, to instantiate the chart object and associate it with the page control.

For example, this is the minimum PeopleCode to create a bar chart using the Chart class.

```
/* Declare and instantiate a chart object; */
Component Chart &cChart11;
&cChart11 = GetChart(DOC_CHRT_WRK.DOC_CHRT_FLD_11);

/* Set the chart data record and specify x-axis, y-axis, and series data;
*/

&cChart11.SetData(Record.DOC_CHRT_SLS_2);
&cChart11.SetDataXAxis(DOC_CHRT_SLS_2.DOC_CHRT_RGN);
&cChart11.SetDataYAxis(DOC_CHRT_SLS_2.DOC_CHRT_SALES);
```


4. View the chart in the browser.

Suppose you have this data in DOC_CHRT_SLSREC:

Region	Sales
Arizona	62
California	50
Oregon	42
Washington	50

This is the bar chart generated by the example code and data. The default chart type for the Chart class is a bar chart. Since no colors are specified, the chart uses the default colors.

This example illustrates a simple bar chart:

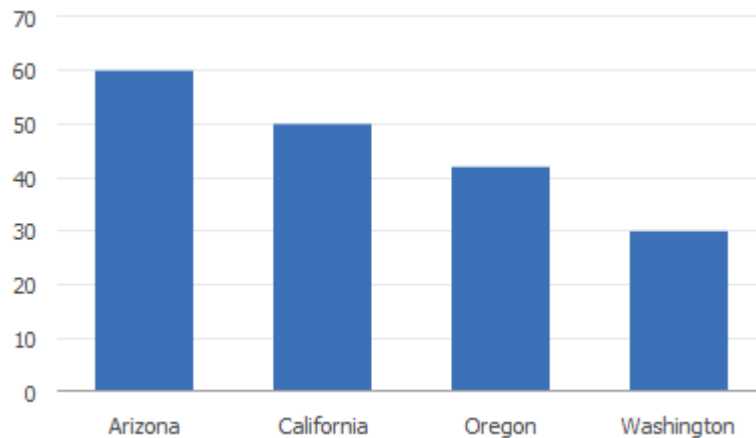

5. Add PeopleCode to control the behavior of the chart or to modify its appearance at runtime. For example, for a bar chart you might add `FieldChange` PeopleCode to the y-axis field on your data record to display information when a user clicks a data point.

See “Adding Drilldown” in [Creating a Chart Using the Chart Class](#).

You can also add `FieldChange` PeopleCode to a Gantt chart, organization chart, or rating box chart to enable the user to interact with the chart.

Related Topics

- [Creating a Chart Using the Chart Class](#)
This section demonstrates how to create a simple chart based on the `Chart` class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.
- [Using the Chart Class](#)
Use the `Chart` class to create charts that display data series in several common formats, including bar charts, line charts, pie charts, and others.
- [Using the Gauge Classes](#)
This section provides an overview of gauge terms and gauge types, and discusses how to use the gauge classes.
- [Using the Spark Chart Classes](#)
Spark charts are used to visualize the trend of a data set in a compact form factor. They are best used to view trends over time, especially when paired with additional context such as in a table. Absolute values and individual data points are not emphasized, so spark charts should not be used to visualize data where such things are important.
- [Using the Gantt Class](#)
Use the `Gantt` class to create Gantt charts. A Gantt chart displays tasks and milestones along a time line. Gantt charts are frequently used in project management because they provide a graphical illustration of a schedule, which helps in planning, coordinating, and tracking project tasks.
- [Using the OrgChart Class](#)
Use the `OrgChart` class to create organization charts. An organization chart represents hierarchical data as boxes arrayed in levels, which can be oriented top to bottom, with horizontal rows, or left to right, with vertical rows. Connectors show parent and child relationships between boxes on adjacent levels.

- [Using the RatingBoxChart Class](#)

A rating box chart is an interactive chart that displays nodes on a two-dimensional grid. If drag-and-drop is enabled for the chart, a user can move the nodes from one quadrant to another on the grid. When the user moves a node, the underlying data is updated automatically.

Creating a Chart Using an iScript

If possible, you should put a chart on a page definition. If not possible, then you can build a chart at runtime using an iScript and call the chart using a URL. Use the `CreateObject` function in the iScript instead of the `GetChart` function. You can then use the `Chart` class property "Html" to include the chart html in your application.

Note

You can create only `Chart`, `LedGauge`, `RatingGaugeChart`, `StatusMeterGauge`, and `SparkChart` class charts using an iScript.

For example, this PeopleCode would build a chart using a standalone rowset:

```
Function IScript_GetChart()
local object &MYCHART;
local string &ChartHTML;

&MYCHART = CreateObject("Chart");
&MYCHART.SetData(xx);

/* xx will be a data row set */

&ChartHTML = &MYCHART.Html;

/* use &ChartHTML in your application */
...
End-Function;
```

Related Topics

- [Creating a Chart Using an iScript](#)

You can also create a chart using an iScript. The following example creates a chart, populates it, and then displays it using HTML written to the Response object. The complete code sample is shown.

Special Considerations for Charts

This section discusses special considerations for using the PeopleSoft charting classes.

Component Processor Considerations

Sometimes, records at level zero on a page are considered *work* records, even when they are not specified as such in Application Designer. Work records are not updated by the database and are skipped when the component is run.

A level-zero record is marked as a work record when any of these conditions is true:

- The record is designated as a work record in Application Designer.
- All fields for the record are used as read-only fields.
- All values for these fields can be read from the input keys.

When a chart area is attached to a level-zero record field of a record considered to be a work record, it is also skipped when the system determines that record's 'work' status.

Related Topics

- PeopleCode Developer's Guide: Understanding Component Buffer Structure and Contents

Translation Considerations

If you hard code a value for a label, a title, a data hint, and so on, then that value is *not* translated. Be sure to specify field values as message catalog entries that will be translated.

Text Considerations for the Chart Class

Text can be found at the following locations in a Chart class chart:

- Chart title.
- Chart subtitle.
- Chart footnote.
- Chart data item labels.
- X-axis and y-axis titles.
- X-axis and y-axis labels.
- Legend descriptions.
- Pie chart segment labels.
- Data hints (hover or mouse over text).

Font types and sizes for chart titles, subtitles, footnotes, axis titles, and axis labels in charts are defined as style classes in PeopleSoft style sheets. The delivered style classes are designed to work with the overall theme of the PeopleSoft user interface. The delivered style classes apply to all charts in the system. Although they are changeable in the Application Designer, Oracle recommends that you keep them as delivered unless you have a good reason to change them.

Axis labels are positioned by the charting engine as part of the overall rendering of the chart graphic. The general pattern for axis and pie chart segment label display is this:

- The font size of the label text remains constant.
- The charting engine will try to maximize the size of the chart graphic while fitting all label text around the graphic.
- The chart graphic area will shrink to a minimum threshold size as the text for labels grows longer.
- After the minimum chart graphic area threshold size is reached, the chart graphic no longer shrinks and labels are displayed in an unpredictable fashion.

There are special considerations depending on whether the type of label is for an x-axis, a y-axis, or a pie chart segment.

Best Practices for Managing Chart Text


The best ways to minimize the chance of unpredictable text are:

- Use the smallest font that is readable for text labels. PeopleTools is delivered with a small point size for axis labels in order to allow more characters to be rendered.
- The larger the chart area is defined, the more room will be available for labels.
- Try to build your charts using short (but descriptive) fields for axis labels.
- Make sure that data hints are always used in your charts to compensate when labels cannot be displayed.


Tooltips (Data Hints or Hover Text)

Each data item in a chart (a bar in a bar chart, for instance) has a tooltip. A default tooltip is created automatically based on the composition of the chart.

The following example displays a bar chart with the default tooltip for the selected data item:

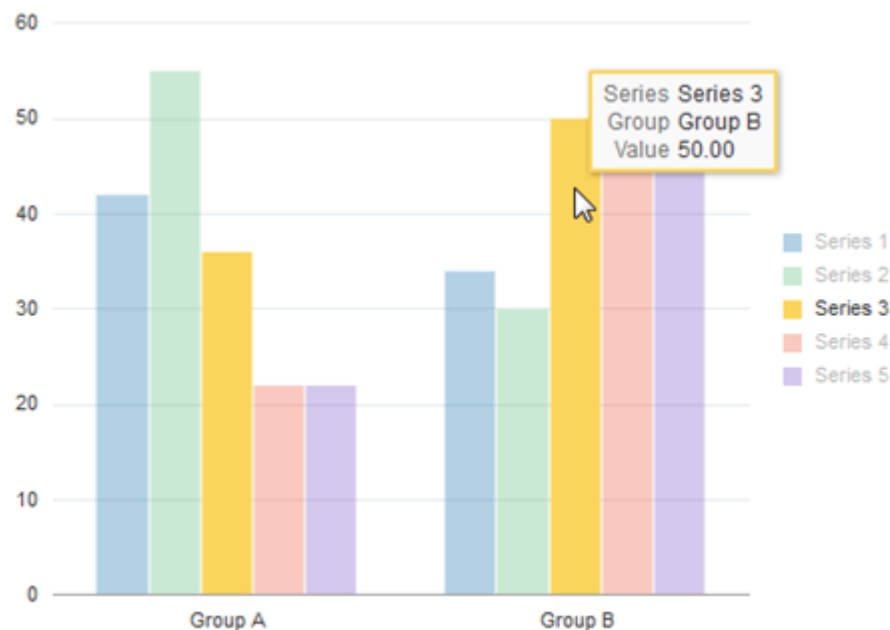

The following example displays a bubble chart with the default tooltip for the selected data item:

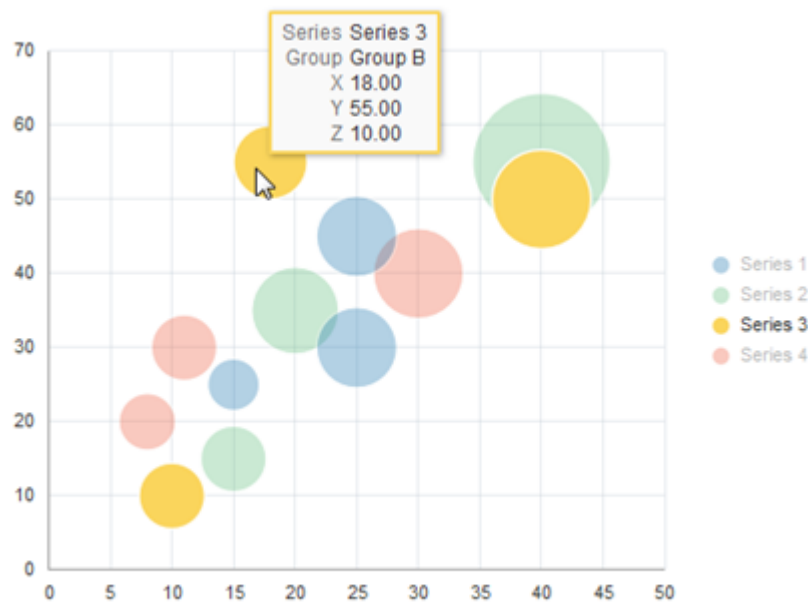


The default tooltip text that appears is constructed from information about the composition of the chart that you have defined and the row of data being charted.

You can modify the labels for the tooltip items by using the `TooltipLabel` class in conjunction with the `Chart` class. Your custom labels will be displayed in the default format.

The following example displays a bar chart with custom tooltips for the selected data item generated using the `TooltipLabel` class:

Shoes sales data for North America

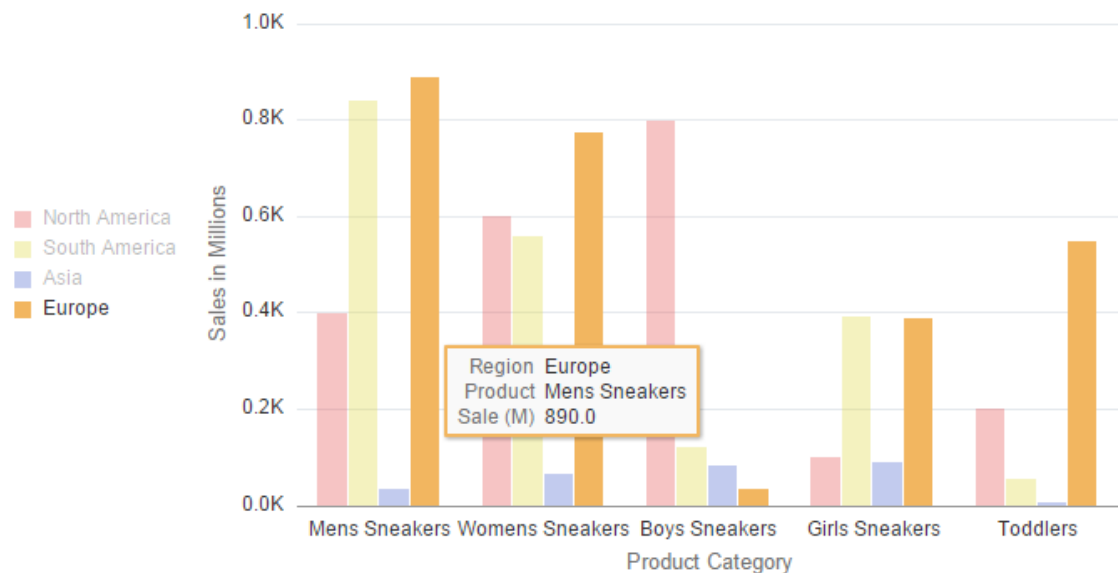

Alternatively, to fully customize tooltips for chart data items you can use the `SetDataHints` method of the `Chart` class.

Related Topics

- [Using the ToolTipLabel Class](#)
The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on chart data points thereby overriding the default tooltips that are automatically created from the chart data.
- [SetDataHints method: Chart class](#)

Text Considerations for the Gantt Class

For Gantt charts, use double quotes to correctly display the use of single quotes in your label, if applicable.

Considerations for Using Mobile Devices

Because mobile devices such as mobile phones, the Apple iPad, or Windows tablets do not use a mouse and rely on touch interactions instead, you interact with charts differently on these devices. To click a button, link, or chart object, tap the touch screen with one finger. To display tooltips for a chart, tap the touch screen twice (double-tap). Tooltips disappear after a few seconds or when you tap another object with a tooltip.

To move a node in a rating box chart, tap once to select the node. Then, tap once in a different grid box to move the node to that box.

Note

Drag-and-drop on Gantt charts is not supported on mobile devices.

Fluid Mode Considerations for Charts and Gauges

Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.


The following information is specific to the following classes:

- Chart class
- DialGauge class
- LEDGauge class
- RatingGaugeChart class
- StatusMeterGauge class
- SparkChart class

Each Chart Must be Enclosed by a Dedicated Group Box

In Application Designer, always place the chart control within a group box and ensure that no other controls are within the group box.

In this example, there are three charts on this fluid page. Each is in its own group box, and all three charts and their group boxes are within a containing group box:

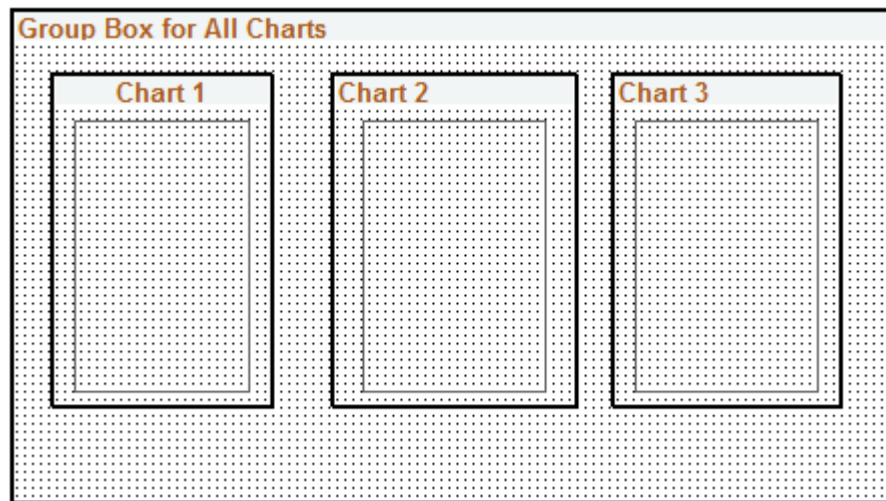

The group boxes that immediately contain the chart controls must be defined as Container group boxes:

The screenshot shows the 'Group Box Properties' dialog box with the 'Fluid' tab selected. The 'Free Form Style' section has an unchecked checkbox for 'Override PeopleTools Style?'. The 'Default Style Name' text box contains 'psc_width-85pct psc_display-inlineblock'. The 'Form Factor Override' section has four text boxes for 'Small', 'Medium', 'Large', and 'Extra Large', all of which are empty. The 'Suppress On Form Factor' section has four unchecked checkboxes for 'Small', 'Medium', 'Large', and 'Extra Large'. The 'Container Properties' section has a 'Group Box Type' dropdown menu set to 'Container' (highlighted with a red box), a 'Draggable' checkbox (unchecked), a 'Droppable' checkbox (unchecked), an 'Html Tag Type' dropdown menu set to 'Default', and a 'ScrollBars' dropdown menu set to 'None'. At the bottom of the 'Container Properties' section is an unchecked checkbox for 'Scroll Sizing by Style'. The dialog box has 'OK' and 'Cancel' buttons at the bottom right.

You can specify other styles as well to help position the chart or gauge within the page.

Specifying Chart Dimensions

When a chart or gauge is placed on a fluid page, the width, height, and aspect ratio are all considered when determining its size. Each chart should be contained by a group box that only has that chart within it.

The width of the chart is determined by the width of the parent group box that contains the chart. The width of the group box (and therefore the chart) can be further controlled by applying a style in the Fluid tab of the group box control in Application Designer.

The height of the chart is determined by the width of the chart and the `AspectRatio` property. The height will be calculated as the width multiplied by the aspect ratio. If no `AspectRatio`

property is provided, the Height property will be used to determine the fixed height of the chart or gauge.

Note

The AspectRatio property does not apply to the DialGauge class; use the Height property instead.

Important

If both the Width and Height properties are supplied with no AspectRatio property, they will be used to produce a fixed size chart or gauge. This chart will not be realizable once its rendered.

On the Fluid tab of the enclosing group box, add a style that specifies the width of the container. The chart will use this information to dynamically determine its width. In this example, the containing group box is styled to use 85% of the container (that is, the group box) that contains it: `psc_width-85pct` If necessary, you can specify overrides for different form factors to achieve an appropriately sized chart or gauge.

Group Box Properties

Record Label Use General **Fluid**

Free Form Style
☐ Override PeopleTools Style?

Default Style Name psc_width-85pct psc_display-inlineblock

Form Factor Override
 Small
 Medium
 Large
 Extra Large

Suppress On Form Factor
☐ Small ☐ Medium ☐ Large ☐ Extra Large

Container Properties
 Group Box Type: Container ☐ Draggable ☐ Droppable
 Html Tag Type: Default ScrollBars: None

☐ Scroll Sizing by Style

OK Cancel

Typically, you specify the height of the chart or gauge as a proportion of the width by assigning a value to the `AspectRatio` property in PeopleCode. Here's an example:

```
&cChart.AspectRatio = 0.8;
```

The `AspectRatio` property value should be greater than 0. If this property is not specified, the default value of 1 is used. `AspectRatio` is a property of the following classes:

- Chart class: [AspectRatio property: Chart class](#)
- LEDGauge class: [AspectRatio property: LEDGauge class](#)
- RatingGaugeChart class: [AspectRatio property: RatingGaugeChart class](#)

- StatusMeterGauge class: [AspectRatio property: StatusMeterGauge class](#)
- SparkChart class: [AspectRatio property: SparkChart class](#)

Related Topics

- Fluid User Interface Developer's Guide: Working with Group Boxes
- Fluid User Interface Developer's Guide: Applying Styles
- [Height property: DialGauge class](#)

Sizing a Chart or Gauge in Classic Mode

When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

- By the Height and Width properties, which specify the dimensions in pixels.
- By the dimensions of the chart page control in Application Designer.

If the class Height and Width properties are not specified, the dimensions from the chart control are used.

Styling PeopleSoft Charts

PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

Charting Sub Style Sheet Organization

The organization of the charting sub style sheets is straightforward. Each chart class has its own set of styles. These styles are in one or more sub style sheets that have a naming convention as shown in the table below.

Charting Class	Sub Style Sheet Begins With
Chart	PSCHARTSTYLE, PSJET
DialGauge	
LEDGauge	
ReferenceArea	
ReferenceLine	
Series	
StatusMeterGauge	
Threshold	
ToolTipLabel	
Gantt	PSCHARTGANTT
OrgChart	PSORGCHART
RatingBoxChart	PSRATEBOX

Different specifications of the styles will be in sub style sheets that are appended with a underscore (" _") followed by a suffix, which is usually the name of the theme.

For instance, PSCHARTSTYLE and PSCHARTSTYLE_TANGERINE have the same styles but the specifications for these styles differ because PSCHARTSTYLE is used for the Swan user interface theme while PSCHARTSTYLE_TANGERINE is used for the Tangerine user interface theme. Similarly, the _FMODE suffix specifies fluid mode style sheets.

See Portal Technology: Configuring Branding System Options for more information on how to specify the theme and default style sheet for your system..

Altering Style Specifications

The styles delivered for charting are designed to work harmoniously with the branding theme that they are associated with. There may be times, however, when you want a different look and feel from the delivered one. Scenarios may include:

- You want to implement a system-wide change in theme (including not only charts but other visual elements such as headers, grids, and so on).
- You want to implement a system-wide change in chart style specification within the context of one of the PeopleSoft delivered themes. An example might be to change the sequence in which colors appear on charts or to change the font size of one of the chart text elements such as the axis titles.
- You want to implement a style modification on a particular chart or particular family of charts. For instance, there may be certain charts that appear on pagelets in which you want the main title to have a large font and be bold.

Different approaches lend themselves to these different scenarios.

Scenario 1: Implement system-wide change in theme

In this scenario you would most likely be creating a new system style sheet for your implementation probably by cloning one of the high level style sheets that PeopleSoft delivers. Once you have done this, follow the steps in Scenario 2 for the charting sub style sheets.

Scenario 2: System-wide change in chart style specifications

1. Identify the charting style classes that you want to change.
2. Identify the charting sub style sheet in which those style classes reside.
3. Clone those sub style sheets.
4. In the cloned sub style sheets, update the values of the style classes that you want to change.
5. Attach the cloned sub style sheets to the default style sheet for your PeopleSoft system.
6. Detach the delivered sub style sheets from the same default style sheet.
7. Test the results.

! Important

Do not change the delivered style sheets and sub style sheets. The best practice is to clone them and make changes to the clones.

! Important

Do not delete style classes from original or cloned style sheets or sub style sheets. Doing so may compromise chart creation.

There is no guarantee that the style sheet value changes that you make will work as expected in the application, as style class specification changes may impact chart creation. You must test the results of your changes to verify that they are working. If changes are not working as expected, you need to try a different style class value.

Scenario 3: Minor style modification

PeopleSoft charting provides a means to override delivered styles on a granular basis on the Chart class and gauge classes. If you need to override one or more delivered style class definitions found in a PSCHARTSTYLE* sub style sheet, do the following:

1. Create a new free form sub style sheet in Application Designer.
2. Open up the PSCHARTSTYLE* sub style sheet that contains the style class definitions.
3. Copy the specific style class definitions and paste them into the new free form sub style sheet.

i Note

Putting the style class definitions into a new free form sub style sheet will simplify your future PeopleTools upgrades.

4. Append an underscore (" _") to the end of the copied style class names followed by an identifier of your own choosing. These new style class definitions are the overriding styles. For example, an overriding style class name for the PSCHARTLEGEND style class could be PSCHARTLEGEND_NEW.
5. Edit the new style class definitions that you have created to suit your needs and save the sub style sheet.
6. Insert the new free form sub style sheet into the default system style sheet that your environment is using.
7. For any chart that you want to use your custom styles, set the AdditionalStyleSuffix property to the identifier you used in step 4.

When the chart is generated at runtime, it will first use any styles that have your override identifier. If such a style class definition is not found, the chart will use the base style that you copied instead.

See Chart class: [AdditionalStyleSuffix property: Chart class](#), DialGauge class: [AdditionalStyleSuffix property: DialGauge class](#), LEDGauge class: [AdditionalStyleSuffix property: LEDGauge class](#), and StatusMeterGauge class: [AdditionalStyleSuffix property: StatusMeterGauge class](#).

Accessibility Settings for Charts

Use the Chart Options page to specify system-wide accessibility settings. When accessibility is enabled for a chart type and the user signs in with screen reader mode on, the system generates the chart data in an HTML table that is in an accessible format for assistive

technologies. For some chart types, this “accessible table” is in addition to the graphical rendering of the chart; in other cases, the accessible table is the only output generated.

- For the Chart class and the gauge classes, the accessible table is in addition to the graphical rendering of the chart.
- For the Gantt class, the accessible table is the only output generated.

Navigation:

PeopleTools, and then **Utilities**, and then **Administration**, and then **Chart Options**

This example illustrates the fields and controls on the Chart Options page.

Chart Options

Chart Options

 < < 1-5 of 5 > >		
	Variable	Value
1	PTACCSBLCHRT	1
2	PTACCSBLCHRTGNT	1
3	PTACCSBLCHRTORG	1
4	PTACCSBLCHRTRB	1
5	PTCOLORCONTRAST	1

Field or Control	Description
VARIABLE	Specify the chart type by variable name: • <i>PTACCSBLCHRT</i> – Chart class charts and gauge charts. • <i>PTACCSBLCHRTGNT</i> – Gantt class charts. • <i>PTACCSBLCHRTORG</i> – OrgChart class charts. • <i>PTACCSBLCHRTTB</i> – RatingBoxChart class charts. • <i>PTCOLORCONTRAST</i> – For a description of this property and its use, see Color Contrast Mode for Charts.
VALUE	Specify the system accessibility setting: • <i>0</i> – Accessibility is disabled for this chart type. • <i>1</i> – Accessibility is enabled for this chart type. Note: The delivered setting is for accessibility to be enabled.

Related Topics

- Accessibility Guide: Personalizing Your PeopleSoft Experience to Support Assistive Technology


Color Contrast Mode for Charts

By default, the adjacent colors in a chart are separated by a gap between the colors and a black border to fulfil accessibility requirements, and this setting is defined by the *PTCOLORCONTRAST* property, which is specified on the Chart Options page.


PTCOLORCONTRAST is a system-wide setting that defines the color contrast mode for all charts.

The following examples show the differences between a pie chart that is enabled for color contrast mode and a pie chart that is not enabled for color contrast mode.

Example of a pie chart with the color contrast mode set to enabled, which is the default rendering.

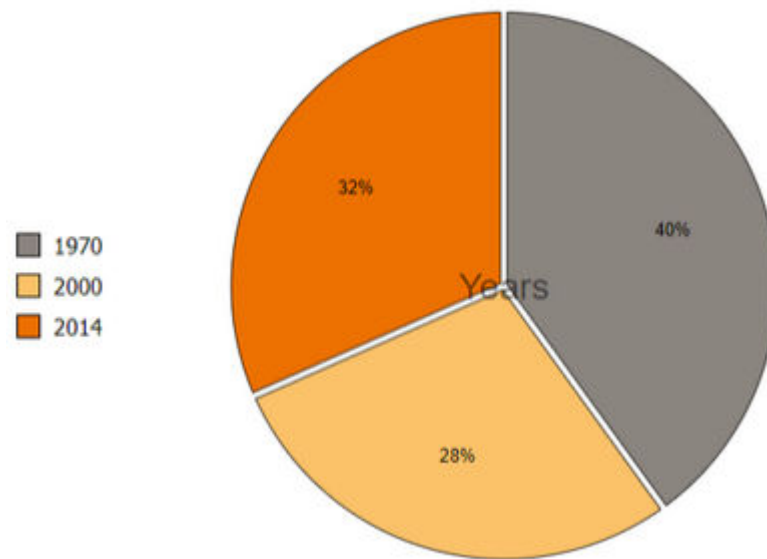

Example of a pie chart with the color contrast mode set to disabled.

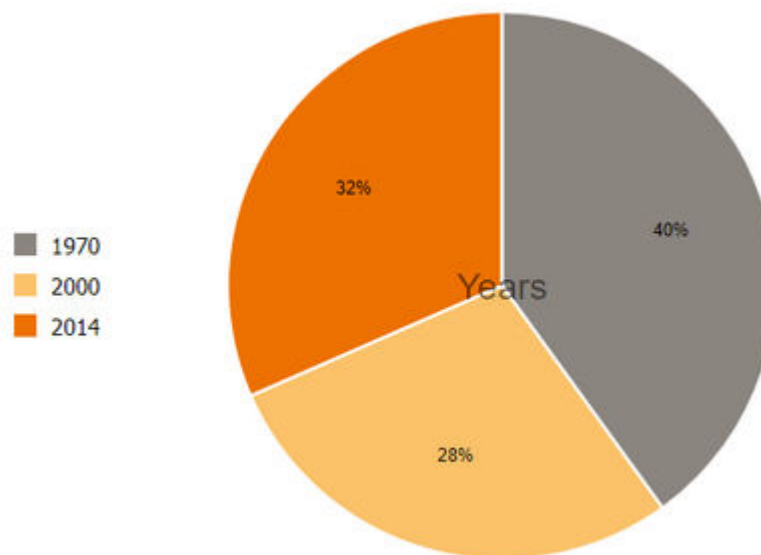

You can override the default color contrast mode using either of the following options:

- Access the Chart Options page (**PeopleTools**, and then **Utilities**, and then **Administration**, and then **Chart Options**) and set the value of the *PTCOLORCONTRAST* property to 0. The default value is 1, that is, the color contrast mode is enabled.
You should remember that *PTCOLORCONTRAST* is a system-wide setting.
- For an individual chart, you can set the chart property *IsColorContrastMode*, in PeopleCode, to false.

Note

When you set the color contrast mode using the *IsColorContrastMode* property for an individual chart, it takes highest precedence. That is, it overrides the color contrast mode, which is set on the Chart Options page, for the individual chart.

For more details, see [IsColorContrastMode property: Chart class](#).

Using the Chart Class

Use the Chart class to create charts that display data series in several common formats, including bar charts, line charts, pie charts, and others.

This section provides an overview of Chart class terms and discusses how to use various Chart classes.

Understanding Chart Class Terms

The following is a list of Chart class terms and their descriptions:

Field or Control	Description
Label	Text that identifies the data on one of the axes.
Legend	Text that identifies the different series in the chart.
Series	A grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could be a series. Generally, every series in a chart has a distinct color. You can have more than one series in a chart for comparison. Each line in a line chart represents one series.
Title	The three titles are main, x-axis, and y-axis. Each title identifies a portion of the chart.
Subtitle	The subtitle appears to the left of the main title.
Footnote	The footnote appears at the bottom left of the chart.
X-axis	The axis that data is measured against.
Y-axis	The axis that contains the data. In most charts, this is the vertical axis. In a horizontal bar chart, this is the horizontal axis.
Secondary y-axis	A secondary y-axis (or Y2 axis) is one that contains data that differs from the primary y-axis but is measured against the same x-axis data and plotted on the same chart as the primary y-axis data.
Reference area	A reference area is displayed in conjunction with a chart as a band of color drawn based on numeric values along a chart axis. For each band of color, you would create a separate instance of the ReferenceArea class.

Field or Control	Description
Reference line	A reference line is displayed in conjunction with a chart as a colored line drawn based on a numeric value along a chart axis. For each line, you would create a separate instance of the <code>ReferenceLine</code> class
Series	A series is a set of data grouped together based on a common attribute and most often is plotted on the y-axis. In PeopleSoft applications, chart data series are a grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could represent a series. Generally, every series in a chart has a distinct color and you can have more than one series in a chart for comparison..
Tooltip	A tooltip is a message that appears when the cursor is positioned over a data point, legend or other element in a chart. The tooltip provides more information about the item of interest. While default tooltips are generated automatically, the <code>ToolTipLabel</code> class and the <code>SetDataHints</code> method provide two alternative methodologies for generating custom tooltips.

Creating Charts Using the Chart Class

You can specify a rowset and have it graphed using a chart object with minimal PeopleCode. Within this rowset, one column must contain data for the x-axis and another column must contain data for the y-axis. If more than one series of data is used, an additional column is required for each series. You can also set color and data hint text for each point in this rowset using additional columns.

The following distinguishable types of data can be included in a chart:

- Primary data.
- Secondary data.

For a conceptual overview, a chart is easier to view in parts; however, these parts do not represent sub-objects. A chart contains the following major parts:

- X-axis.
- Y-axis.
- Legend.
- Data .
- Title.
- Subtitle.
- Footnote

The x- and y-axes have access to titles and labels associated with their data.

Chart Class Chart Types

The following chart types are available for the Chart class:

- Bar.
- Bubble.
- Funnel.
- Histogram.
- Horizontal bar.
- Horizontal percent bar.
- Horizontal stacked bar.
- Line.
- Percent bar.
- Pie.
- Ring.
- Scatter.
- Stacked bar.

Related Topics

- [Creating a Chart Using the Chart Class](#)

This section demonstrates how to create a simple chart based on the Chart class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.

Chart Class Design Guidelines

These topics provide an overview of how charts represent data and discuss:

- Charting numeric data sets.
- Determining the appropriate chart type.
- Setting chart colors.
- Setting chart legends.

Understanding How Charts Represent Data

PeopleSoft charts are an alternative means of visualizing tabular data.

For example, here is an example data table (with column headings):

Product	Color	Created In	Applied in Month	Salespers on	Chart Height*	Units*	Revenue*
Bicycle	Red	2012	01	Terry	72	5	360
Tricycle	Blue	2012	01	Jim	84	3	600
Unicycle	Silver	2012	02	Terry	72	1	150

* Numeric data

Some of the columns carry numeric measures (in our example, Units, Revenue, and Chart Height in Inches) and other columns have values that describe the data (for example, Product, Color, Month, Year, and Salesperson). Some of the data columns are numeric; others are not.

To create a chart you need to determine which fields you want to see in the chart. Then, you pass those into certain Chart class methods:

- `SetDataXAxis`.
- `SetDataYAxis`.
- `SetDataSeries`.
- `SetDataZAxis`.
- `SetFunnelDataActual` (for funnel charts only).
- `SetFunnelDataTarget` (for funnel charts only).

Each of these methods takes `RECORD.FIELD` as a parameter. In addition, `SetDataYAxis` can take multiple `RECORD.FIELD` parameters.

Charting Numeric Data Sets

These sections discuss:

- Charting one set of numeric data.
- Charting two sets of numeric data.
- Charting three sets of numeric data.

Charting One Set of Numeric Data

In general, you pass a field with numeric data to `SetDataYAxis` and a field with non-numeric data to `SetDataXAxis`. These two methods are required.


Here's a simple example. Suppose you want to show revenue by product as a chart. Essentially, this is the rowset that you'll be working with, a subset of the rowset introduced previously:

Product	Revenue*
Product	Revenue*
Bicycle	360
Tricycle	600
Unicycle	150


* Numeric data

In this case, choose the Revenue field to be passed to `SetDataYAxis` and the Product field to be passed to `SetDataXAxis`.

If you choose to display this as a pie chart, you end up with this:

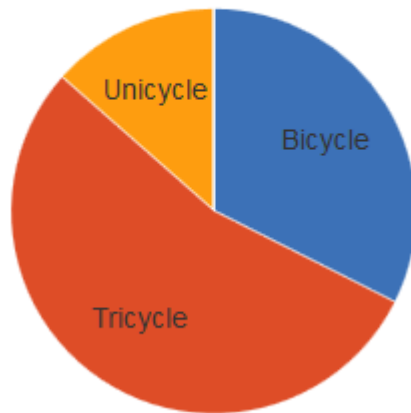Product Sales

Or, you could display the data as a bar chart:

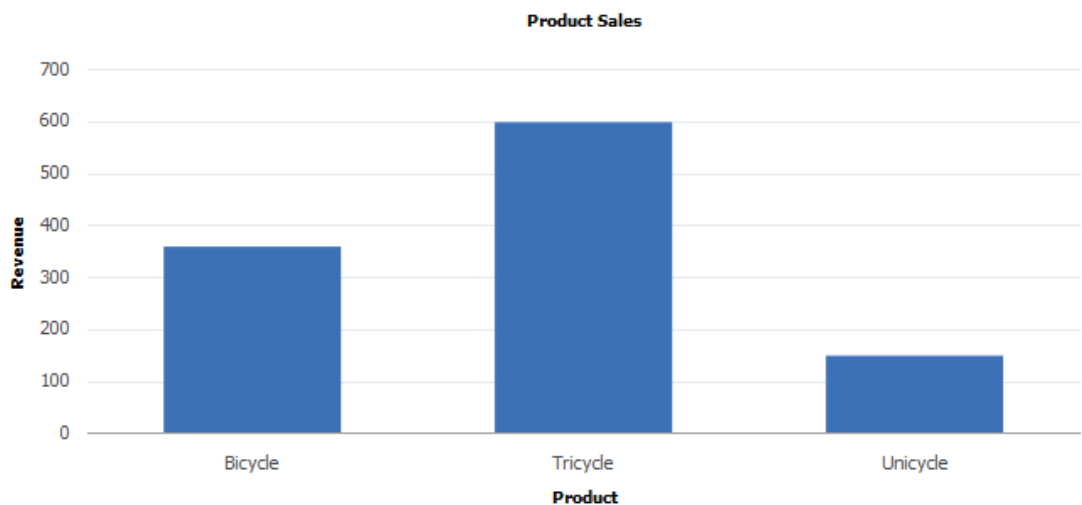

Alternatively, you could display the data with any chart type that can display one dimension of data, such as a horizontal bar, a line, a histogram, or other chart type.

What if you also wanted to show the same information but with additional month information? The table of data that you would be interested in is:

Product	Month	Revenue*
Bicycle	01	360
Tricycle	01	600
Unicycle	02	150


* Numeric data

In that case, choose the Revenue field to be passed to `SetDataYAxis`, the Product field to be passed to `SetDataXAxis`, and the month field to be passed to `SetDataSeries`.

You would need to use a chart type that can display two dimensions along with the data. This rules out the pie chart, but you can still use a bar chart:



To get a different view of the same data, you can change the method assignments, so that Month is passed in `SetDataXAxis` and Product is passed in `SetDataSeries`. The chart that results is this:

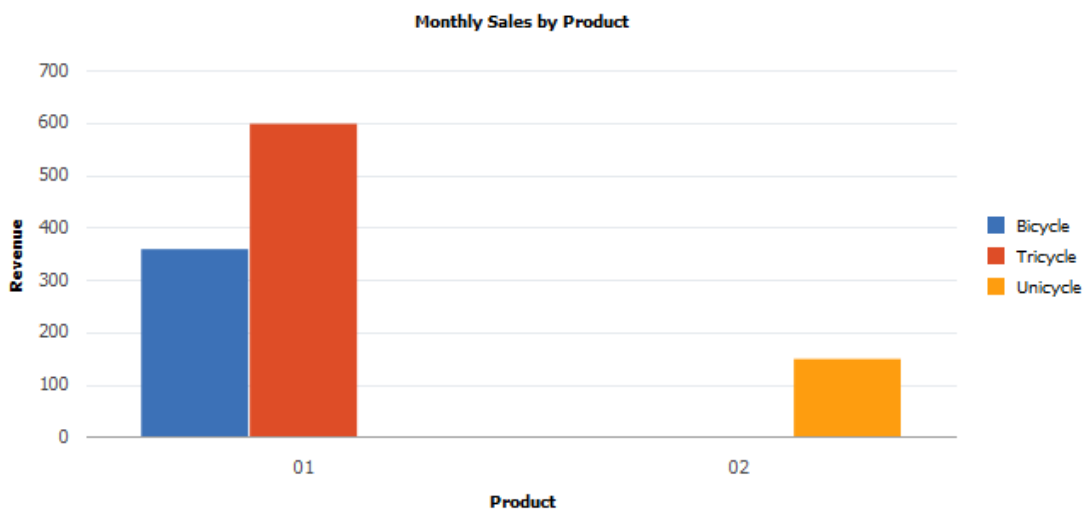

Charting Two Sets of Numeric Data

The following chart types allow you to plot two sets of numeric data:

- Scatter chart
- Line chart
- Histogram

- Funnel chart
- Overlay chart

The scatter and line charts let you plot one set of numeric data vertically along the y-axis and one set of data horizontally along the x-axis.


The funnel chart lets you plot both sets of numeric data vertically on the y-axis.

Here's an example of a scatter chart representing the following table of data:

Tenure*	Salary*
11	88000
12.2	96200
4.6	101300
6.6	83000
14	111200
8.5	118000

* Numeric data


This example illustrates the scatter chart for the preceding data:

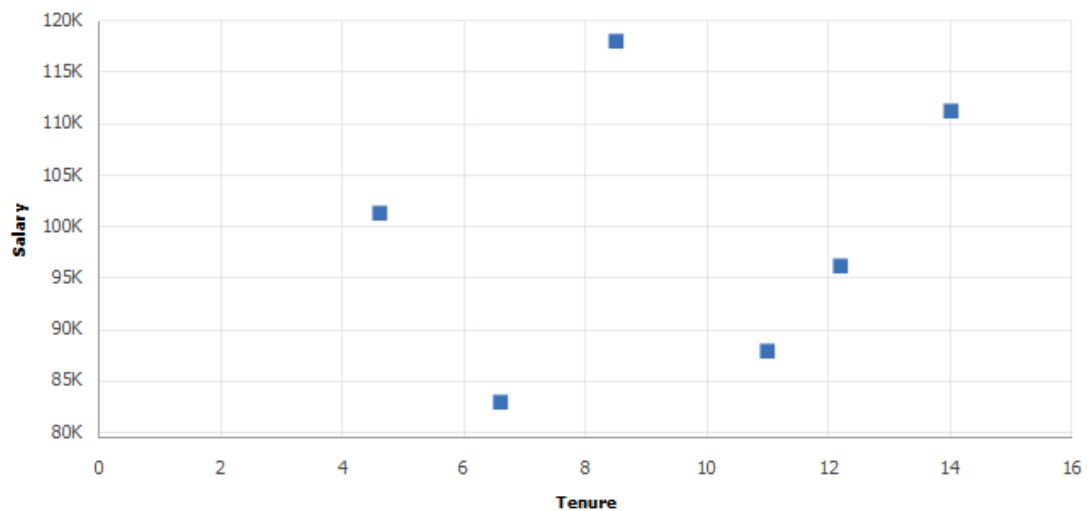

You can also use a line chart to represent the same data. Whereas the scatter chart requires both x- and y-axes to be numeric, the line chart x-axis can be either numeric or non-numeric.

In a funnel chart one set of data is specified using the `SetFunnelDataActual` method and the other set of data is specified using the `SetFunnelDataTarget` method.

Here's an example of a funnel chart that graphs two sets of data, a target amount and an actual amount:

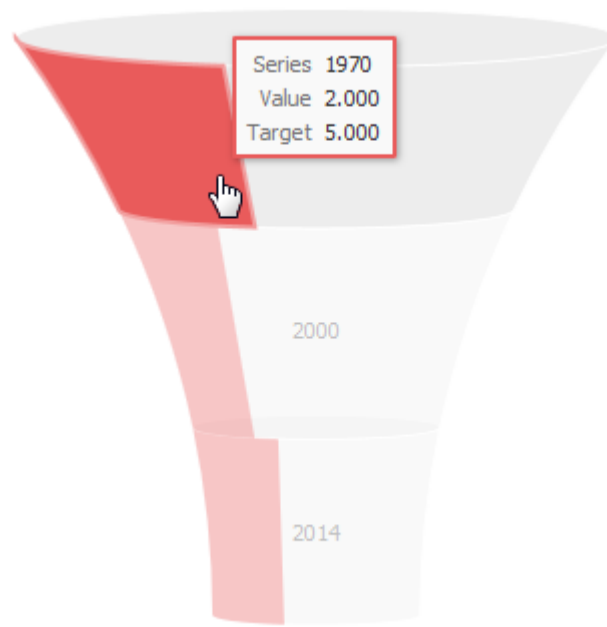

For funnel charts, these additional considerations apply:

- `SetData` and `SetDataXAxis` are required.
- `SetFunnelChartDataActual` can be used instead of `SetDataYAxis`; either are valid.
- `SetFunnelChartDataTarget` is optional. When used, `SetFunnelChartDataTarget` must specify the same record as `SetFunnelChartDataActual`.

Note

Legends are not available for funnel charts. The use of Chart class methods and properties for legends has no effect on a funnel chart.

Charting Three Sets of Numeric Data

You can use the bubble chart to display three sets of numeric data. The first two sets are along the x- and y-axes just as if you were plotting two sets of numeric data. The third set of numeric data is displayed as the size of the bubble positioned at the (x,y) coordinate in the chart and is set by passing the field in the `SetDataZAxis` method.


Using the same data as the previous scatter chart example, a third column of numeric data (Age) is included:

Tenure*	Salary*	Age*	Name
11	88000	39	Joyce
12.2	96200	55	Tolstoy
4.6	101300	32	Shelley
6.6	83000	48	Tolkien
14	111200	59	Dickens

Tenure*	Salary*	Age*	Name
8.5	118000	49	Hemingway

* Numeric data

This example illustrates the bubble chart for the preceding data:

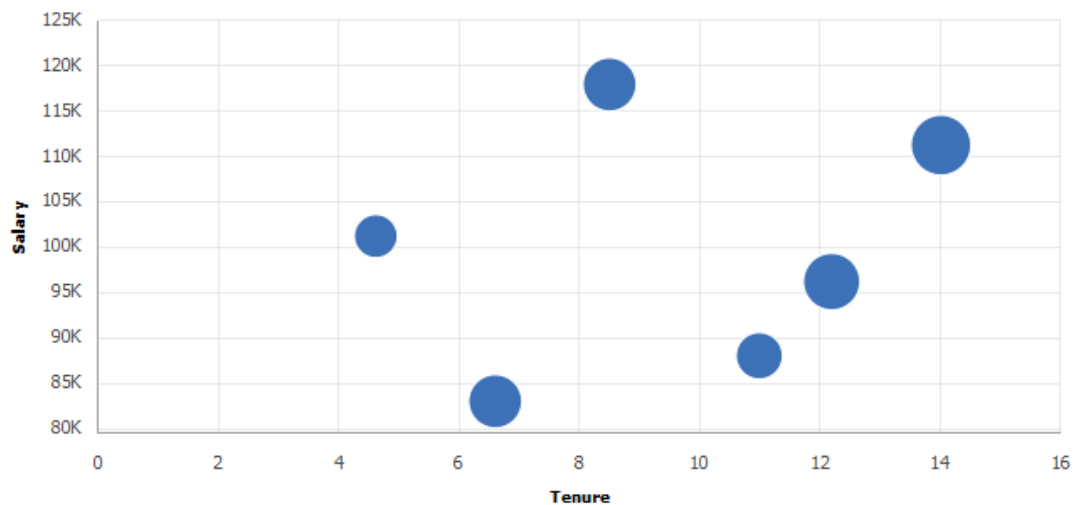


Determining the Appropriate Chart Type

Use the following procedures to determine the chart types that are appropriate for your data set:

- One set of numeric data.
- Two sets of numeric data.
- Three sets of numeric data.

Care should be taken when using the line chart with non-numeric data on the x-axis. You should only use it when the data along the x-axis suggests some sort of progression. For example, using a line chart when the x-axis represents a sequence of months is appropriate; using a line chart when the x-axis represents a list of people in alphabetical order probably is not.

Use the following flowchart to determine which chart types are appropriate to your data. In addition, the flowchart visually presents the methods and properties to use with your chart:

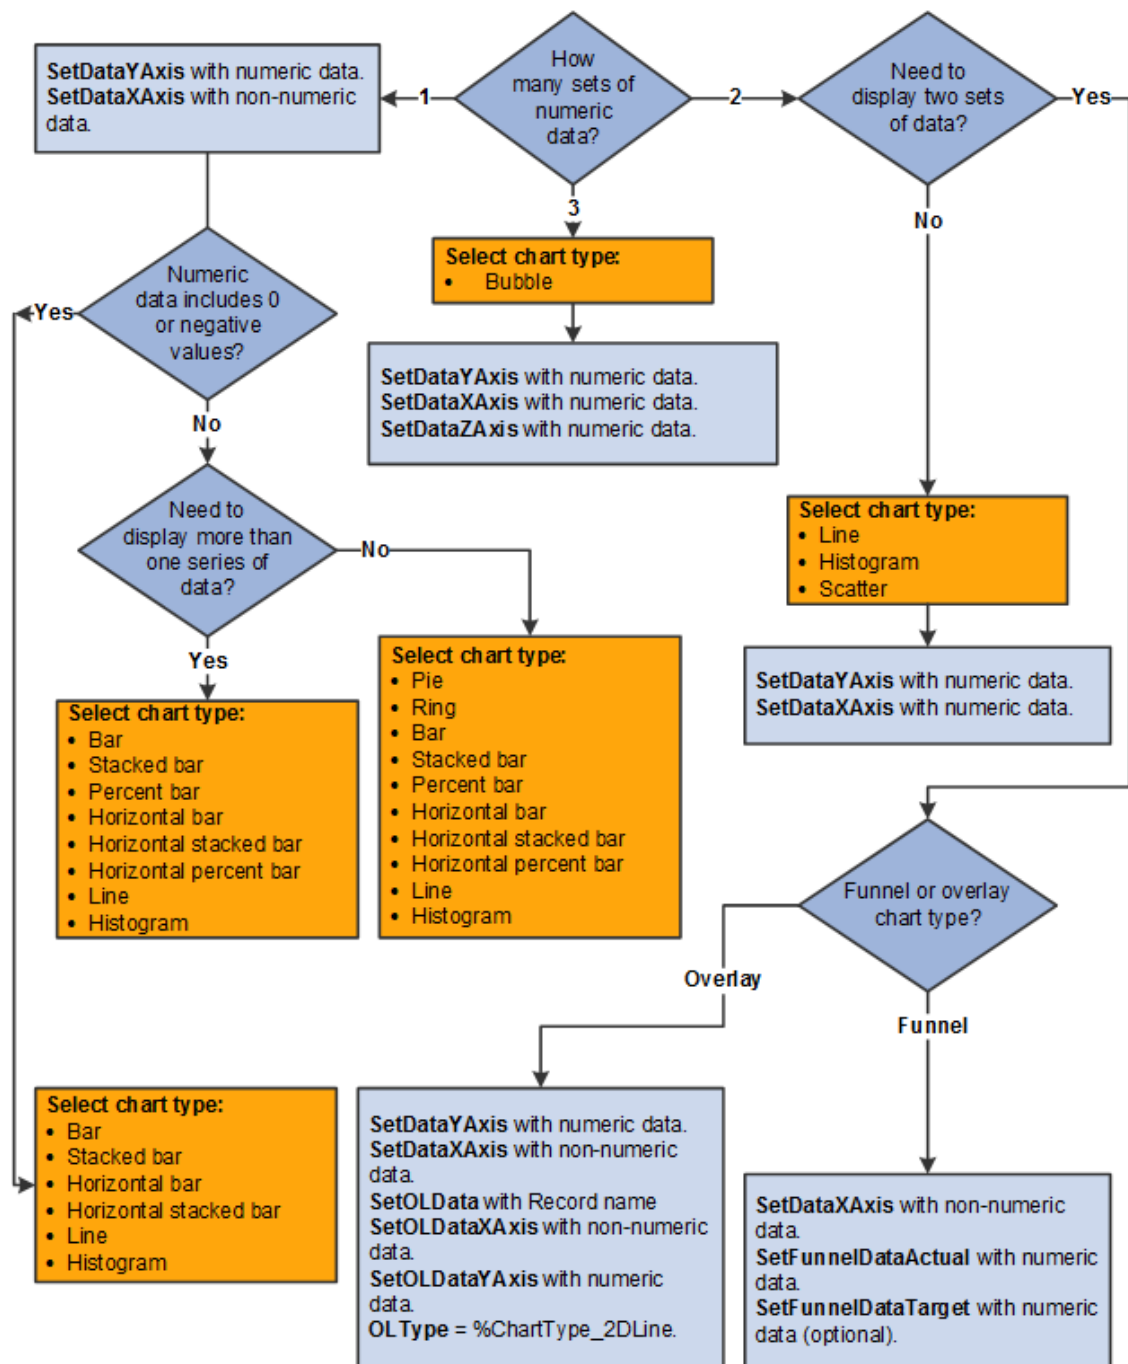

Determining the Chart Type for One Set of Numeric Data

Use the following procedure to determine the chart type and methods and properties to use for one set of numeric data:

1. Use the following flowchart to determine which chart types are appropriate to your data. In addition, the flowchart visually presents the methods and properties to use with your chart:
Pass numeric data to SetDataYAxis.
2. Pass non-numeric data to SetDataXAxis.

3. Does the numeric data include 0 or negative values? If yes, finish by selecting one of these appropriate chart types:
 - Bar
 - Stacked bar
 - Horizontal bar
 - Horizontal stacked bar
 - Line
 - Histogram

Note

Negative values cannot be displayed in any type of percent bar chart.

4. Otherwise, do you need to display more than one series of data? If no, finish by selecting one of these appropriate chart types:
 - Pie
 - Ring
 - Bar
 - Stacked bar
 - Percent bar
 - Horizontal bar
 - Horizontal stacked bar
 - Horizontal percent bar
 - Line
 - Histogram
5. Otherwise, select one of these appropriate chart types:
 - Bar
 - Stacked bar
 - Percent bar
 - Horizontal bar
 - Horizontal stacked bar
 - Horizontal percent bar
 - Line
 - Histogram

Determining the Chart Type for Two Sets of Numeric Data

Use the following procedure to determine the chart type and methods and properties to use for two sets of numeric data:

1. Do you have other non-numeric data to display? If no, complete steps 2 and 3:
2. Select one of these appropriate chart types:

- Line.
 - Histogram.
 - Scatter.
 - Funnel (with both actual and target data).
 - Overlay.
3. Use these methods and properties for scatter, line, and histogram charts:
 - a. Pass numeric data to `SetDataYAxis`.
 - b. Pass numeric data to `SetDataXAxis`.
 4. Otherwise, if you need to display more than one series of data in a funnel chart, complete the following:
 - a. Pass the non-numeric data to `SetDataXAxis`.
 - b. Pass numeric data to `SetFunnelDataActual`. (Alternatively, pass the numeric data to `SetDataYAxis`).
 - c. (Optional) Pass numeric data to `SetFunnelDataTarget`.

Determining the Chart Type for Three Sets of Numeric Data

Use the following procedure to determine the chart type and methods and properties to use for three sets of numeric data:

1. Select the appropriate chart type: Bubble.
2. Pass numeric data to `SetDataYAxis`.
3. Pass numeric data to `SetDataXAxis`.
4. Pass numeric data to `SetDataZAxis`.

Setting Chart Colors

Chart colors are determined in the following ways:

- Automatically.
- By using the `SetColorArray` method to specify an array of color choices.
- By using the `SetDataColor` method to specify a field on a record that holds a color value.

Automatic color determination occurs when neither of the other two methods is used. For all charts except pie charts, each data series is assigned a color; all data points within a series share that color. For pie charts each data point is assigned its own color. In that way it's easier to distinguish pie segments from one another. Here is an example of the base data that will be charted:

Year	Review Rating	Percent	Color
2011	1-POOR	2.00	0
2011	2-FAIR	5.00	1
2011	3-GOOD	50.00	2
2011	4-VERY GOOD	20.00	3
2011	5-OUTSTANDING	10.00	4
2011	6-NONE	13.00	5
2012	1-POOR	5.00	6

Year	Review Rating	Percent	Color
2012	2-FAIR	10.00	7
2012	3-GOOD	15.00	8
2012	4-VERY GOOD	20.00	9
2012	5-OUTSTANDING	10.00	10
2012	6-NONE	40.00	11


The Review Rating field is assigned to the x-axis, Percent is assigned to the y-axis, and Year is assigned to the data series:

```
&cChart.SetData(Record.CJY_RVW_DSTRBTN);
&cChart.SetDataXAxis(CJY_RVW_DSTRBTN.CJY_RVW_RTG);
&cChart.SetDataYAxis(CJY_RVW_DSTRBTN.CJY_DSTRBTN_PCT);
&cChart.SetDataSeries(CJY_RVW_DSTRBTN.CJY_YR);
```

Note

In the following examples, because pie charts can display one series of numeric data only, the pie charts reflect data from the first six rows only (the first data series). The bar charts reflect both series of data.

Automatic color generation results in the following bar and pie charts:

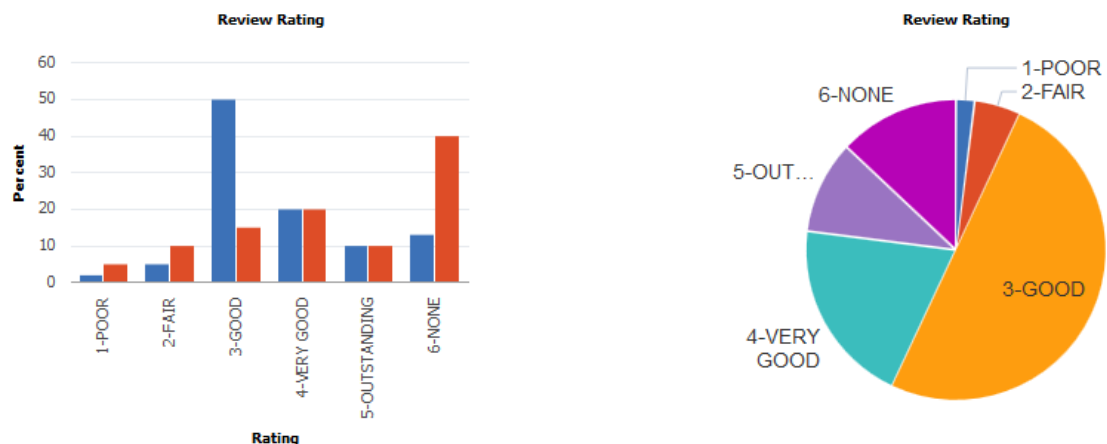

SetColorArray allows you to create an array of color values in PeopleCode and pass that to the charting engine for use in rendering the chart. It works the same way as using automatic color assignment, except that it allows you to pass in a color sequence that differs from the style sheet's default sequence. For bar charts, each data series is assigned a color; all data points within a series share that color. In the preceding example, all data for the year 2011 is displayed in blue bars; for the year 2012, in red bars. For pie charts each data point is assigned its own color.


Using the same data as before, the `SetColorArray` method can be used to specify a color array:

```
&clr_array = CreateArray(%ChartColor_Black,%ChartColor_Blue,%ChartColor_Cyan,⇒
%ChartColor_DarkGray,%ChartColor_Gray, %ChartColor_Green);
```

rem The preceding is equivalent to `CreateArray(0,1,2,3,4,5);`

```
&cChart.SetColorArray(&clr_array);
```


Specifying the color array results in these charts:

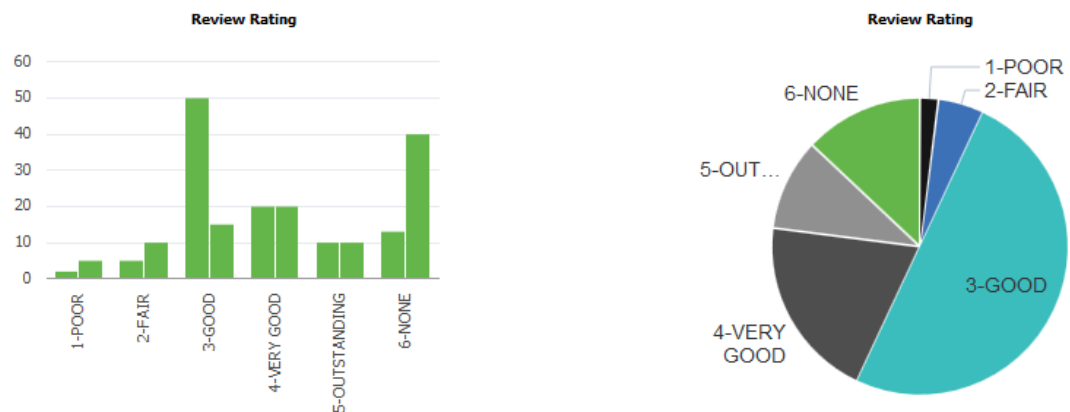

`SetDataColor` works a bit differently from `SetColorArray`. By using the value of a record field, `SetDataColor` provides more granular control of bar chart colors, in that you can vary bar color data point by data point and not by the higher level data series:

```
&cChart.SetDataColor(CJY_RVW_DSTRBTN.CJY_COLOR);
```

Note that in the preceding data grid, each row of data also includes a color value. The charts that result are:

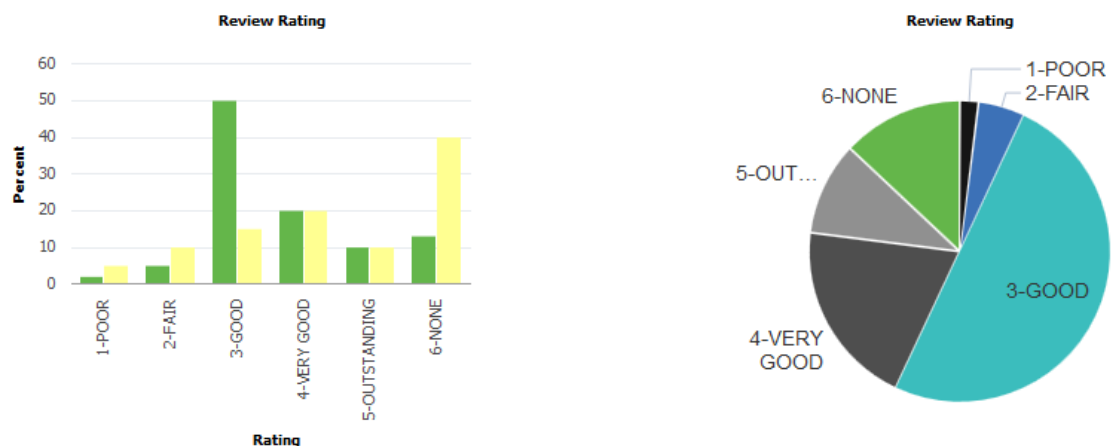

If both `SetColorArray` and `SetDataColor` are set for a chart, `SetDataColor` takes precedence and `SetColorArray` is ignored.

Setting Chart Legends


The chart property `HasLegend` must be set to `true` for a legend to appear.

```
&cChart.HasLegend = True;
```

Legend entries are determined in two ways:

- Automatically
- By using the `SetLegend` method to specify an array of legend entries

Here are charts that have automatically generated legend entries:

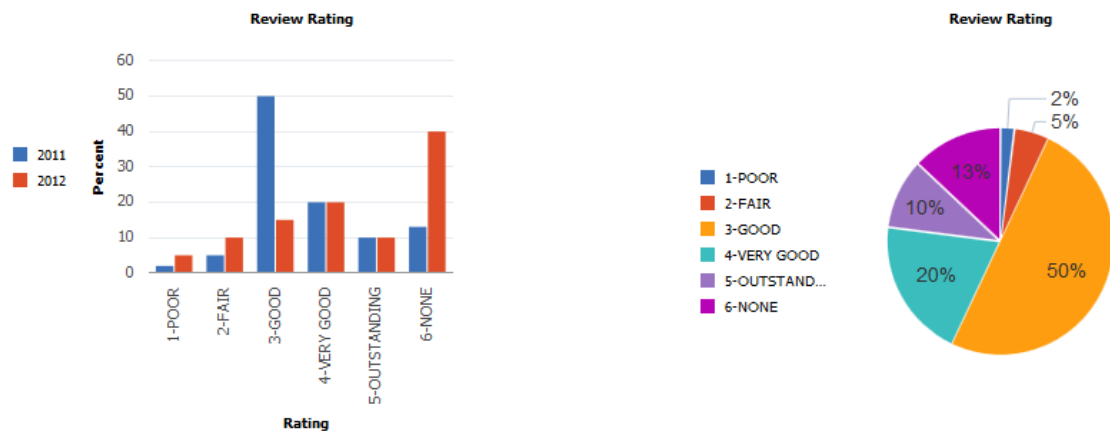

The default position for the legend is to the left of the chart. Set the chart property `LegendPosition` to move the legend to other locations next to the chart.


A legend entry provides a text description that explains what a color in the chart represents. The colors in the legend are sequenced in the same order as the data and colors are sequenced in the chart.

In all chart types except pie charts, the default legend entries describe the data series. In a pie chart, the default legend entries describe the data points (that is, the pie segments). In a pie chart if you have a legend, each pie chart segment is automatically labeled with the percentage it contributes to the whole.

If you use `SetLegend` to create legend entries, as an application developer you must ensure that the number of entries in the legend array matches exactly the number of data points that appear in your chart.

```
&LegendArray = CreateArray("Entry 1", "Entry 2");
&cChart.SetLegend(&LegendArray);
```

These charts use the specified legend array:

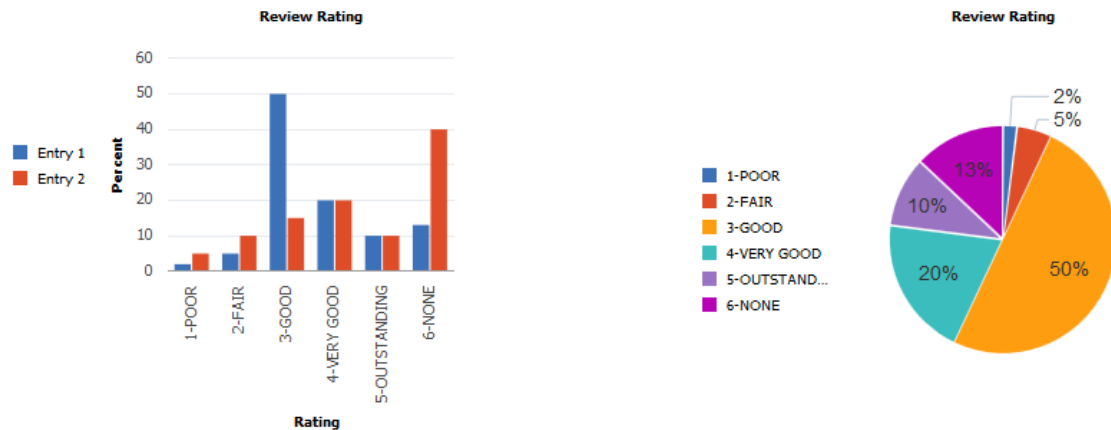


Note that in the case of the pie chart, there were not enough legend entries in the array to account for all the segments in the pie chart. Therefore, for the pie chart, the default legend was used.

If the number of entries in the array is increased to match the number of pie slices, there are more entries than are needed for the bar chart, which produces several undesirable results.

```
&LegendArray = CreateArray("Entry 1", "Entry 2", "Entry 3", "Entry 4", "Entry 5",  
    "Entry 6");  
&cChart.SetLegend(&LegendArray);
```


The bar chart displays the default legend entries (2) ignoring any additional entries that were supplied in the legend array:

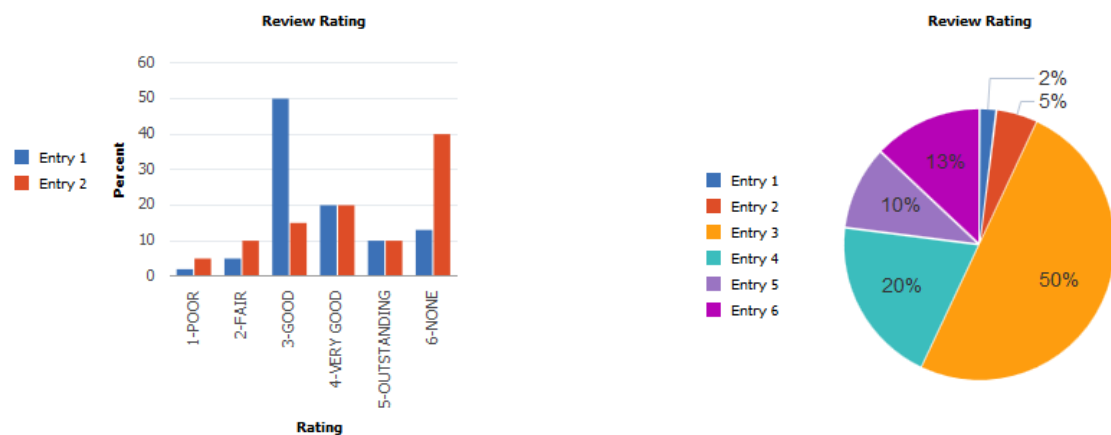

If the number of entries is increased to be larger than needed for either the bar chart or the pie chart, similar undesirable results are displayed for the bar chart.

```
&LegendArray = CreateArray("Entry 1", "Entry 2", "Entry 3", "Entry 4", "Entry 5",  
    "Entry 6", "Entry 7");  
&cChart.SetLegend(&LegendArray);
```


In this case, the pie chart reverts to the automatically generated legend:

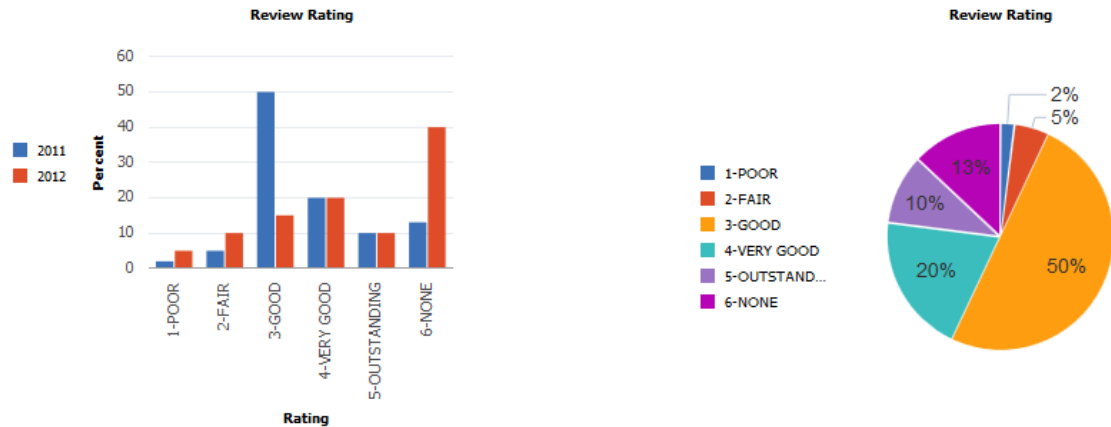

If color is set by `SetDataColor` and the default legend is chosen, the bar chart only shows legend entries for the data series.

```
&cChart.SetDataColor(CJY_RVW_DSTRBTN.CJY_COLOR);
&cChart.HasLegend = True;
```


The bar chart and pie charts show default legends.

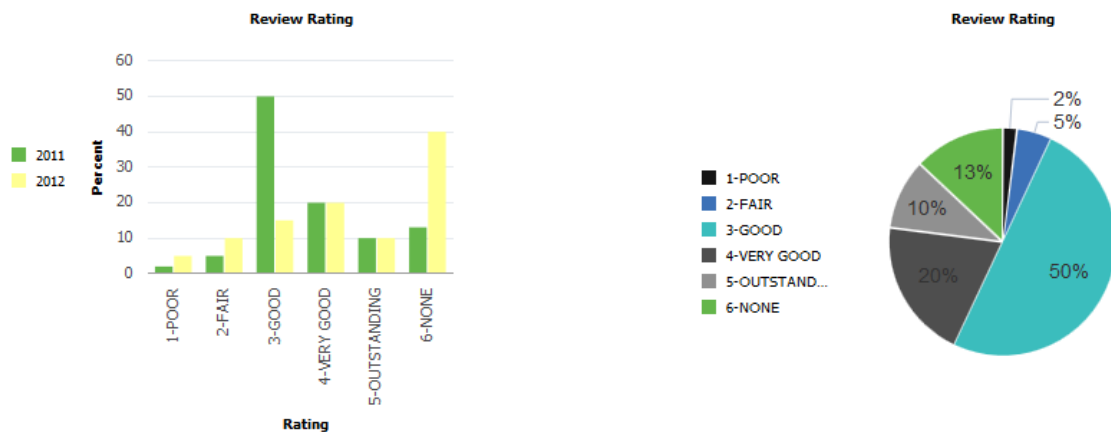

If color is set by `SetDataColor` and the legend array is larger than needed for either chart type, the results are also undesirable.

```
&cChart.SetDataColor(CJY_RVW_DSTRBTN.CJY_COLOR);
&cChart.HasLegend = True;
&LegendArray = CreateArray("Entry 1", "Entry 2", "Entry 3", "Entry 4", "Entry 5",
    "Entry 6", "Entry 7", "Entry 8", "Entry 9", "Entry 10", "Entry 11", "Entry 12");
```


The bar chart displays the default legend entries (2) ignoring any additional entries that were supplied in the legend array.

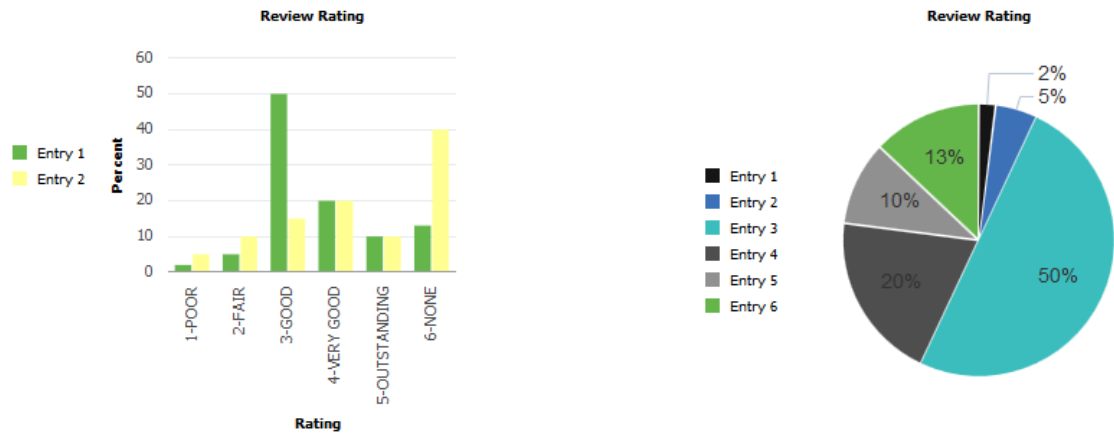

If color is set by `SetDataColor` and the legend array is the size required by the pie chart, the results are also undesirable.

```
&cChart.SetDataColor(CJY_RVW_DSTRBTN.CJY_COLOR);
&cChart.HasLegend = True;
&LegendArray = CreateArray("Entry 1", "Entry 2", "Entry 3", "Entry 4", "Entry 5",
    "Entry 6");
```


The pie chart uses the specified legend array.

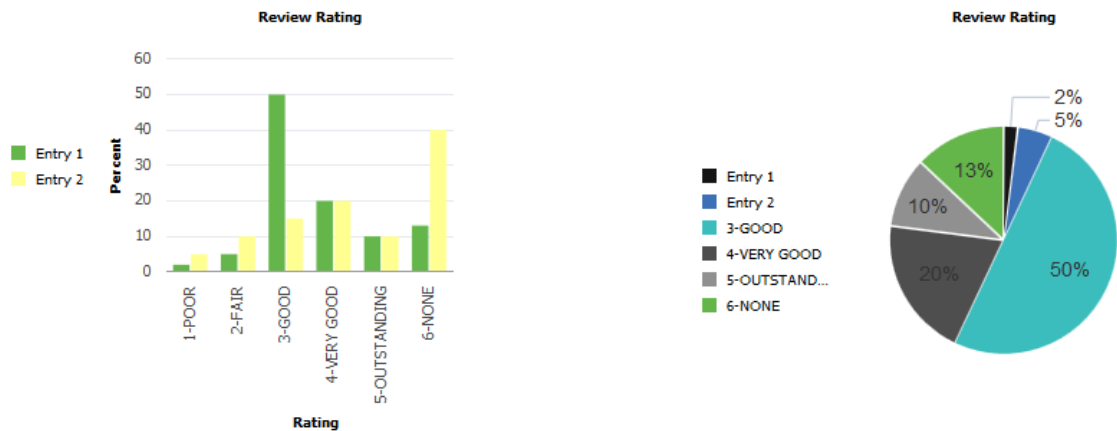

If color is set by `SetDataColor` and the legend array is the size required by the bar chart, the desired results are produced for both charts.

```
&cChart.SetDataColor(CJY_RVW_DSTRBTN.CJY_COLOR);
&cChart.HasLegend = True;
&LegendArray = CreateArray("Entry 1", "Entry 2");
```


The legends for both charts are correct. The bar chart uses the specified legend array; the pie chart uses the default legend.

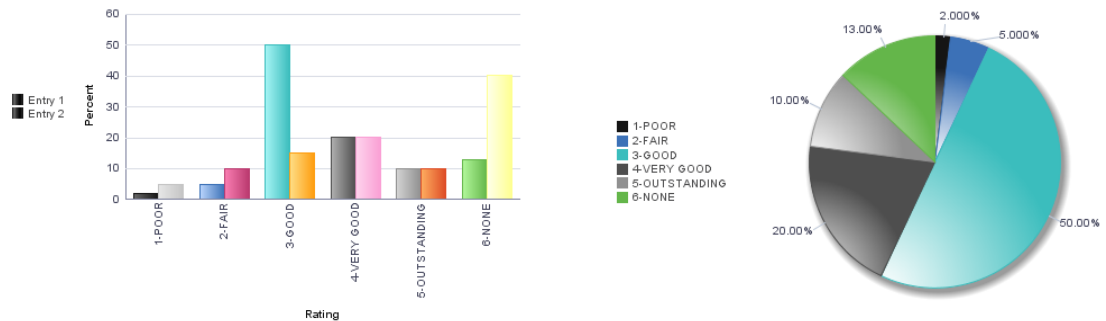

Creating and Using Data Series with Charts

In PeopleSoft applications, chart data series are a grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could be a series. Generally, every series in a chart has a distinct color. You can have more than one series in a chart for comparison. Each line in a line chart represents one series.

In the following example, the region has been set as the data series:

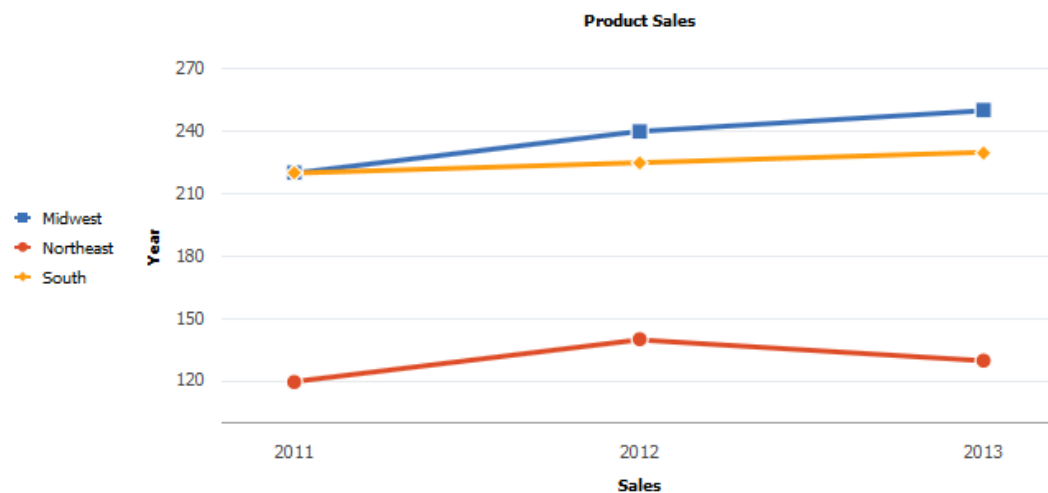

You can identify the data that you want in each series in two alternative ways:

- Using the `SetDataSeries` method.
- Specifying more than one field with the `SetDataYAxis` method.

If you use `SetDataSeries`, you pass into that method a `RECORD.FIELD` reference. That field will have values for each data item in the chart that associates the data item with a series. For instance, consider this layout of the `PRODUCT_SALES` table:

Year	Sales	Region
2011	120K	Northeast
2011	220K	South

Year	Sales	Region
2011	220K	Midwest
2012	140K	Northeast
2012	225K	South
2012	240K	Midwest
2013	130K	Northeast
2013	230K	South
2013	250K	Midwest

The relevant PeopleCode would look as follows:

```
SetDataXAxis(PRODUCT_SALES.YEAR);
SetDataYAxis(PRODUCT_SALES.SALES);
SetDataSeries(PRODUCT_SALES.REGION);
```

This would produce the red, blue, and yellow lines in the preceding line chart.

If you specify more than one field in SetDataYAxis, each field passed into SetDataYAxis will result in one data series in the chart. For instance, here's an alternative table layout for the PRODUCT_SALES table:

Year	SALES_NE	SALES_S	SALES_MW
2011	120K	220K	220K
2012	140K	225K	240K
2013	130K	230K	250K

The relevant PeopleCode would look as follows:

```
SetDataXAxis(PRODUCT_SALES.YEAR);
SetDataYAxis(PRODUCT_SALES.NE, PRODUCT_SALES.SALES_S, PRODUCT_SALES.MW);
```

This would also produce exactly the same red, blue, and yellow lines in the preceding line chart.

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetDataSeries method: Chart class](#)

Creating a Chart with Two Y-Axes

When the values in a chart vary widely from data series to data series, or when you have mixed types of data (for example, both revenue and quantity data), you can plot the additional data series on a second vertical axis referred to as a “secondary y-axis” (or Y2 axis). The scale of the secondary y-axis reflects the values for the associated data series.

Two y-axes can only be displayed for bar charts, horizontal bar charts, stacked bar charts, horizontal stacked bar charts, and the line charts. In addition, you must specify multiple fields when you invoke the SetDataYAxis method; you cannot display multiple y-axes when only one field is specified.

Consider the following table of revenue data:

Account Name	Year	Actual	Budget	Forecast	Quantity
Revenue	2011	12000	14000	15000	500
Revenue	2012	21000	20000	22000	800
Revenue	2013	15000	16000	12000	110

One set of data (quantity) varies widely from the other three sets— actual revenue, budgeted revenue, and forecast revenue. All of the revenue can be plotted on the primary y-axis and quantity on the secondary y-axis. The x-axis (year) is common between the two y-axes.

Use certain PeopleCode methods and properties to specify the format of charts with two y-axes. Use the `SetDataYAxis` method to specify all of the fields that will be plotted on the y-axes. In this example, the four fields are specified as follows:

```
&oChart.SetDataYAxis(QE_COL_MULTI_2Y.LY_AMOUNT_ACTUAL,
QE_COL_MULTI_2Y.LY_AMOUNT_BUDGET, QE_COL_MULTI_2Y.LY_AMOUNT_FORECAST,
QE_COL_MULTI_2Y.QE_QUANTTY);
```

Then, use the `SetYAxisColumnType` method to specify which values appear on the primary y-axis and which appear on the secondary y-axis. Use the following constants to indicate which axis:

Constant	Description
<code>%Axis_Y</code>	Associate column to the primary y-axis.
<code>%Axis_Y2</code>	Associate column to the secondary y-axis.


For example, only the fourth field will appear on the secondary y-axis:

```
&oChart.SetYAxisColumnType(CreateArray(%Axis_Y, %Axis_Y, %Axis_Y, %Axis_Y2));
```

You can use the `Y2AxisTitle` property to specify the title for the secondary y-axis. For example:

```
&oChart.Y2AxisTitle = "Quantity";
```

The following example displays the revenue data plotted on the primary y-axis and the quantity data plotted on the secondary y-axis:

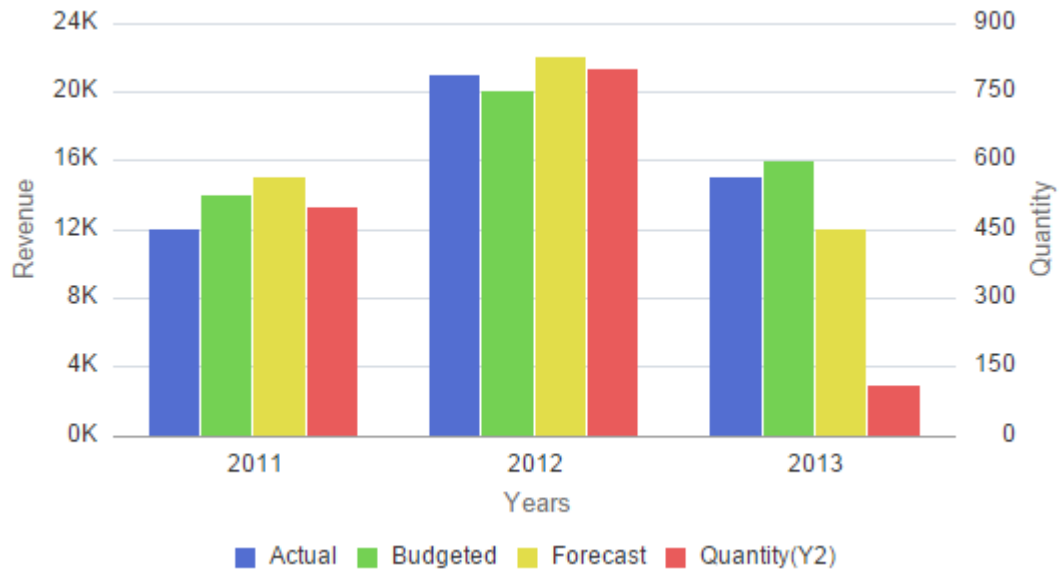

The following PeopleCode was used to generate the preceding chart:

```

Component Chart &oChart;

&oChart = GetChart(QE_JET_2YWRK.QE_CHART_FIELD);
&oChart.Reset();
&oChart.Type = %ChartType_2DBar;

rem Set the record for chart data;
&oChart.SetData(Record.QE_COL_MULTI_2Y);

rem Specify the field for the x-axis;
&oChart.SetDataXAxis(QE_COL_MULTI_2Y.LY_YEARS);

rem Specify multiple fields for the y-axes;
&oChart.SetDataYAxis(QE_COL_MULTI_2Y.LY_AMOUNT_ACTUAL,
QE_COL_MULTI_2Y.LY_AMOUNT_BUDGET, QE_COL_MULTI_2Y.LY_AMOUNT_FORCAST,
QE_COL_MULTI_2Y.QE_QUANTTY);

&oChart.SetSeriesLabels(CreateArray("Actual", "Budgeted", "Forecast",
"Quantity"));

rem Specify which fields appear on which y-axis;
&oChart.SetYAxisColumnType(CreateArray(%Axis_Y, %Axis_Y, %Axis_Y, %Axis_Y2));

&oChart.XAxisTitle = "Years";
&oChart.YAxisTitle = "Revenue";
&oChart.Y2AxisTitle = "Quantity";

rem Specify whether the Y2 axis is split from the primary y-axis;
&oChart.IsSplitDualY = False;

&oChart.HasLegend = True;
&oChart.LegendPosition = %ChartLegend_Bottom;


```

With the addition of the following PeopleCode excerpt that instantiates a Series object, the preceding PeopleCode program will plot the secondary y-axis data as a line chart instead of as a bar chart:

```
rem defining new Series object with its type;
Local Series &S1;


&S1 = GetSeries();
&S1.Name = "Quantity";
&S1.Type = %SeriesType_Line;
&jSeries = CreateArray(&S1);
&oChart.SetSeries(CreateArray(&S1));
```

In the following chart example, the a Series object is used to plot data on the secondary y-axis as a line chart to visually differentiate it from the revenue data:

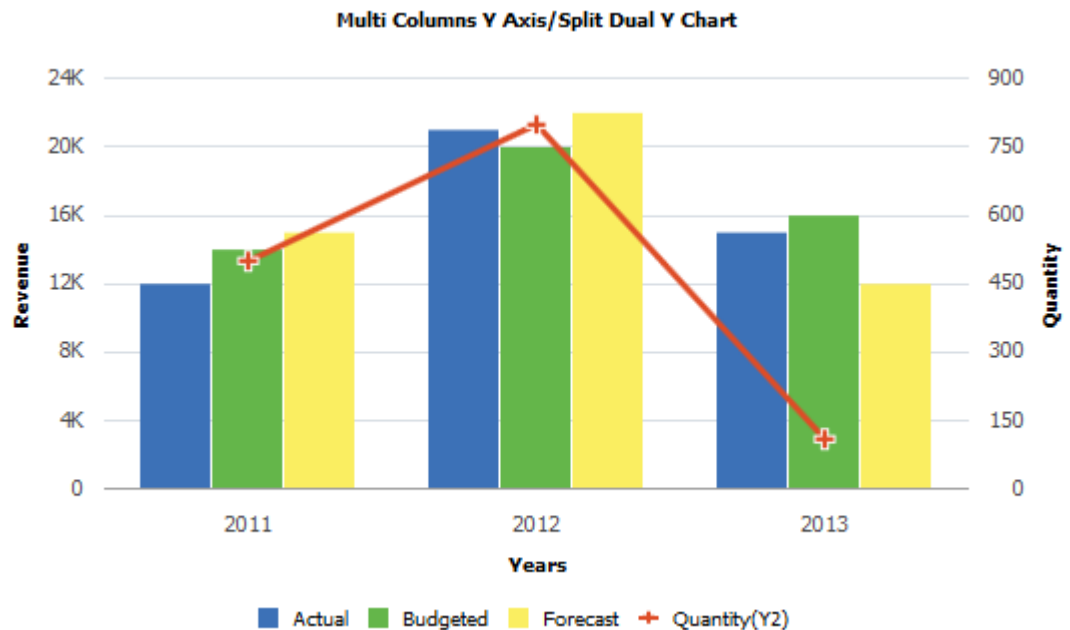

In addition, the `IsSplitDualY` property allows you to split the chart into two charts: one displaying the primary y-axis and the displaying the secondary y-axis.

Set `IsSplitDualY` to `True` to create a chart similar to the following:

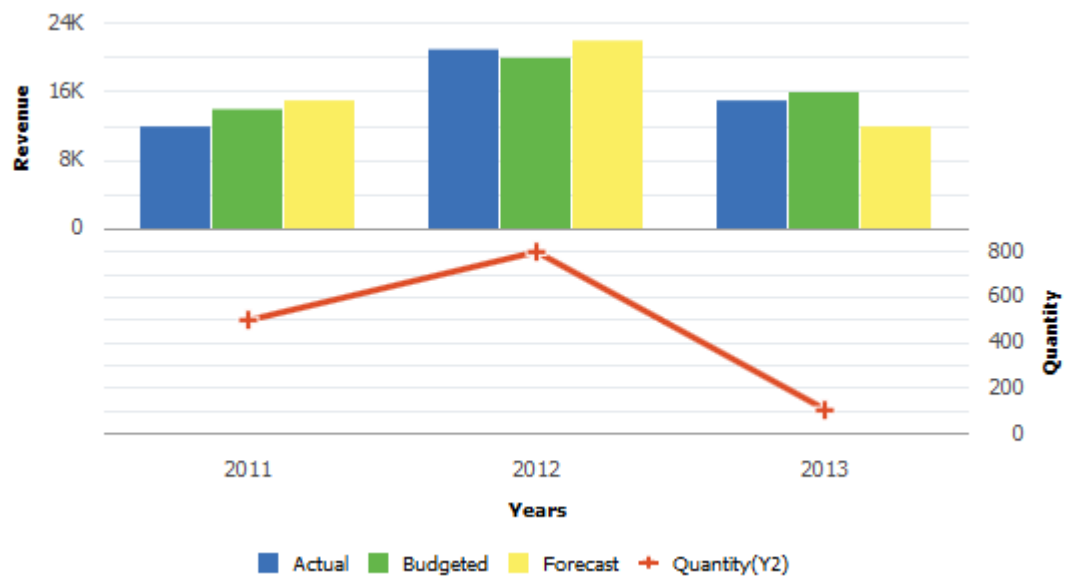

Additional properties provide ways for you to modify the secondary y-axis including: `IsY2AxisInteger`, `Y2AxisMin`, `Y2AxisMax`, and `Y2AxisPrecision`.

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetYAxisColumnType method: Chart class](#)
- [IsSplitDualY property: Chart class](#)

Selecting and Highlighting Data Points

Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

Selection can trigger:

- `FieldChange PeopleCode` for those data items.
- Redirection to a URL for the data items as defined by the `SetDataURLs` method.

De-selection can trigger:

- `FieldChange PeopleCode` for the `RECORD.FIELD` associated with the chart control.
- Redirection to a URL for the chart as defined by the `ChartURL` property.

In addition, users can interactively change the chart type—for example, changing a pie chart to display as a bar chart.

PeopleCode features allow PeopleSoft application to manage and maintain user-selected data items:

- Use the `DataSelectionMode` property of the `Chart` class to specify whether data selection is available for a chart.
- Use the `aSelections` property of the `ChartClientState` class to identify which data items are selected on a chart.

- Use the `nType` property of the `ChartClientState` class to identify which chart type was selected by the user.
- Use the `SetSelectedData` method of the `Chart` class to redraw a chart while maintaining which data items were previously selected by the user.

Related Topics

- [DataSelectionMode property: Chart class](#)
- [SetSelectedData method: Chart class](#)
- [ChartClientState](#)
- [aSelections property: ChartClientState class](#)
- [nType property: ChartClientState class](#)

Using the ReferenceArea Class

The `ReferenceArea` class is used in conjunction with the `Chart` class to display bands of color to be drawn with the chart based on numeric values along a chart axis. For each band of color, you would create a separate instance of the `ReferenceArea` class.

Creating Reference Areas Using the ReferenceArea Class

The essential steps to use the `ReferenceArea` class are:

1. Create an instance of the `ReferenceArea` class in PeopleCode by using the `GetReferenceArea` built-in function:

```
&ref1 = GetReferenceArea();
```

2. Set the properties on the instance of `ReferenceArea` class that you created.
3. Add the instance to an array of `ReferenceArea` instances:

```
&ref_areas = CreateArray(&ref1);
```

Note


For each band of color, you would add a separate instance of the `ReferenceArea` class to this array.

4. Pass the array into the `SetReferenceArea` method of the `Chart` class:

```
&cChart.SetReferenceArea(&ref_areas);
```

Using Reference Areas with Charts

To produce a bar chart similar to the following example that displays a reference area, you would create two instances of the `ReferenceArea` class:

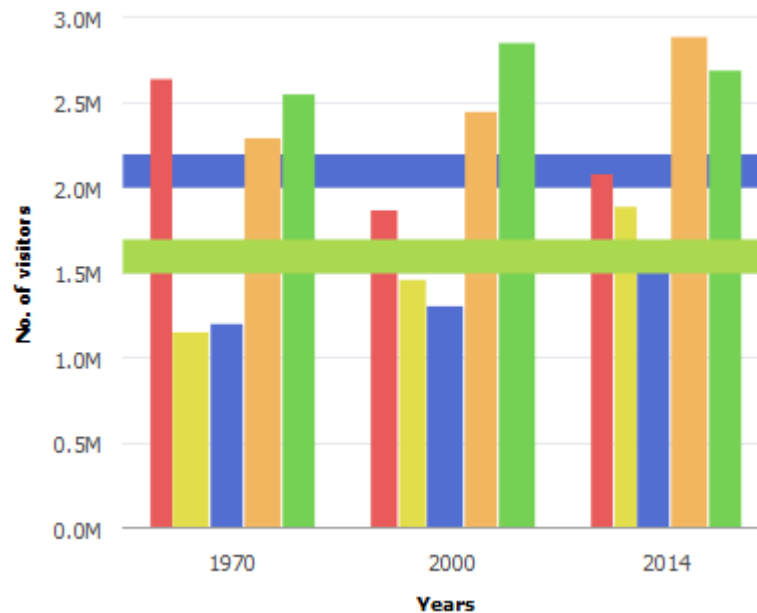

While it is not required, you could create a user-defined PeopleCode function that returns the array of reference areas.

```
Function bld_ref_areas Returns array;
    &ref1 = GetReferenceArea();
    &ref1.Association = %Ref_Association_Y1;
    &ref1.Description = "1 STD from Mean";
    &ref1.ShortText = "Ref Area1";
    &ref1.IsDisplayedTextInLegend = True;
    &ref1.ReferenceAreaColor = %ChartColor_Yellow;
    &ref1.ReferenceAreaValues = CreateArray(50000, 30000);
    &ref_areas = CreateArray(&ref1);
    Return &ref_areas;
End-Function;
```

Then, you associate the array returned by this function to the instance of Chart class using the SetReferenceArea method:

```
&cChart.SetReferenceArea(bld_ref_areas());
```

Related Topics

- PeopleCode Language Reference: GetReferenceArea function
- [ReferenceArea Class Properties](#)
These properties are used by the ReferenceArea class. The properties are described in alphabetic order.
- [SetReferenceArea method: Chart class](#)

Using the ReferenceLine Class

The ReferenceLine class is used in conjunction with the Chart class to display colored lines to be drawn with the chart based on numeric values along a chart axis. For each reference line, you would create a separate instance of the ReferenceLine class.

Creating Reference Lines Using the ReferenceLine Class

The essential steps to use the ReferenceLine class are:

1. Create an instance of the ReferenceLine class in PeopleCode by using the GetReferenceLine built-in function:

```
&refln1 = GetReferenceLine();
```

2. Set the properties on the instance of ReferenceLine class that you created.
3. Add the instance to an array of ReferenceLine instances:

```
&ref_lines = CreateArray(&refln1);
```

Note


For each reference line, you would add a separate instance of the ReferenceLine class to this array.

4. Pass the array into the SetReferenceLine method of the Chart class:

```
&cChart.SetReferenceLine(&ref_lines);
```

Using Reference Lines with Charts

To produce a chart similar to the following example that displays a reference line, you would create two instances of the ReferenceLine class:

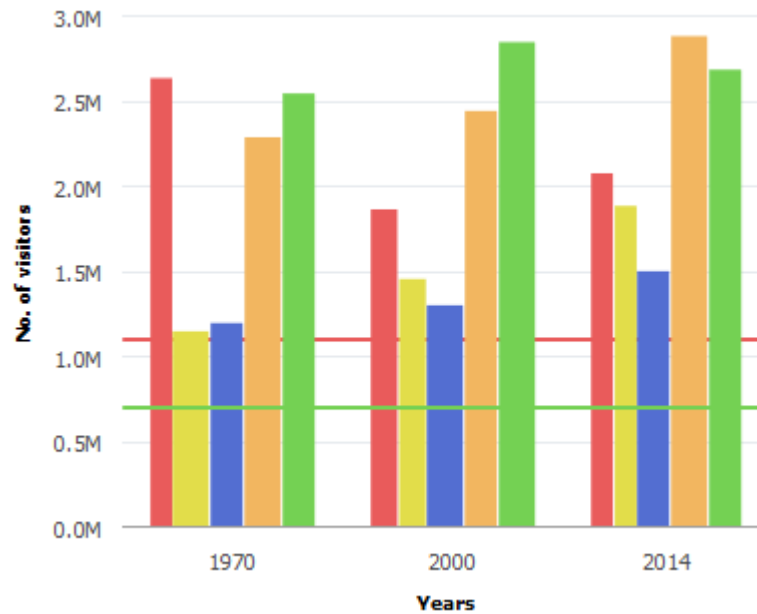

While it is not required, you could create a user-defined PeopleCode function that returns the array of reference lines.

```
Function bld_ref_lines() Returns array;
    &refln1 = GetReferenceLine();
    &refln1.Association = %Ref_Association_Y1;
    &refln1.Description = "Average";
    &refln1.ShortText = "Avg";
    &refln1.IsDisplayedTextInLegend = False;
    &refln1.ReferenceLineLocation = %Ref_Back;
    &refln1.ReferenceLineColor = %ChartColor_Red;
    &refln1.ReferenceLineValue = CJY_CHRT_REF_WK.CJY_AMT;
    &reflines = CreateArray(&refln1);
    Return &reflines;
End-Function;
```

Then, you associate the array returned by this function to the instance of Chart class using the SetReferenceLine method:

```
Function bld_chrt();
    &cChart = GetChart(CJY_CHRT_REF_WK.CJY_CHRT1);
    &cChart.Reset();
    &cChart.SetData(Record.CJY_SLRY);
    &cChart.SetDataXAxis(CJY_SLRY.CJY_NM);
    &cChart.setDataYAxis(CJY_SLRY.CJY_SLRY);
    &cChart.SetReferenceLine(bld_ref_lines());
End-Function;
```

Related Topics

- PeopleCode Language Reference: GetReferenceLine function

- [ReferenceLine Class Properties](#)
These properties are used by the ReferenceLine class. The properties are described in alphabetic order.
- [SetReferenceLine method: Chart class](#)

Using the Series Class

The Series class is used in conjunction with the Chart class to override the default chart type (as defined by the Type property for the Chart object) for selected members of the data series. (The field representing the data series is specified using the SetDataSeries method.) Using the Series class allows you to render more than one chart type simultaneously.

The Series class can only be used in conjunction with bar charts, horizontal bar charts, stacked bar charts, horizontal stacked bar charts, and the line charts.

Using the Series Class with the Chart Class

The essential steps to use the Series class are:

1. Specify the field representing the data series for the chart.

```
&cChart.SetDataSeries(RECORD.FIELD);
```

2. Create an instance of the Series class in PeopleCode by using the GetSeries built-in function:

```
&series1 = GetSeries();
```

3. Set the Name and Type properties on each instance of the Series class that you created.

Note

The value of the Name property must match exactly the value of a member in the data series as specified by either the SetDataSeries method or set by the SetSeriesLabel method.

4. Add the instance to an array of Series instances:

```
&all_series = CreateArray(&series1);
```

Note

Add a separate instance of the Series class to this array for each member of the data series that you want to override the default chart type. Members not explicitly added to this array will inherit the default chart type. Alternatively, you can use the %SeriesType_Inherit constant to specify that a data series member inherit the default chart type.


5. Pass the array into the SetSeries method of the Chart class:

```
&cChart.SetSeries(&all_series);
```

Overriding the Chart Type Using the Series Class

In the following example of a bar chart, two of the five series are displayed as different chart types:

Visiting National Parks

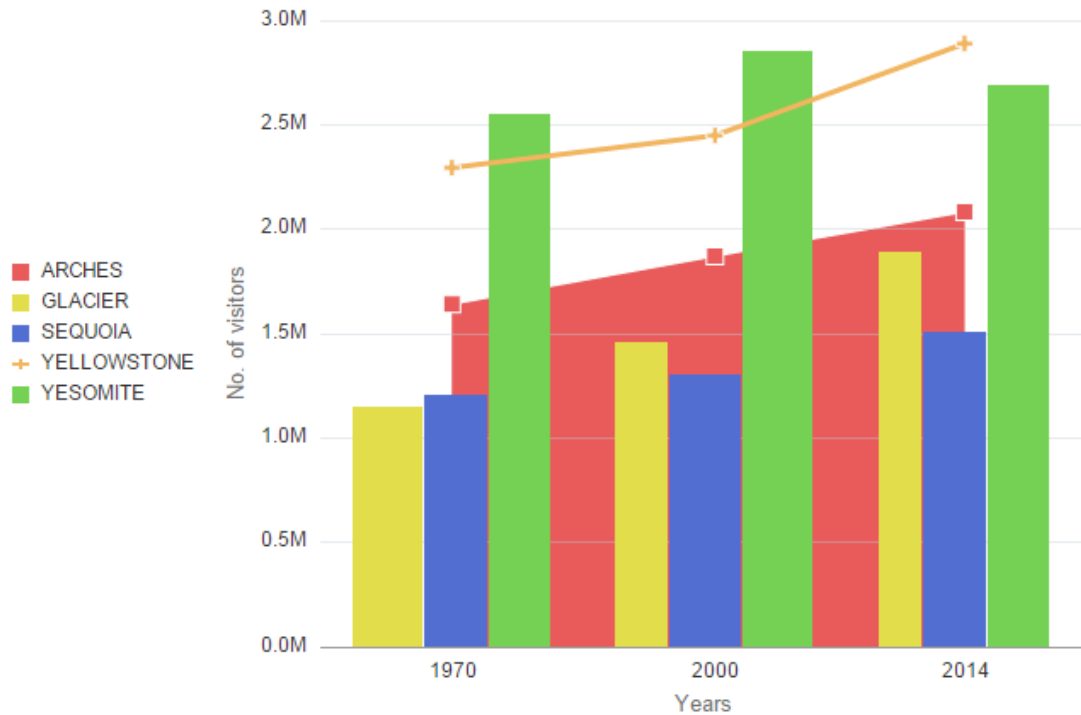

To produce a bar chart similar to the preceding example that uses a different chart type for the first and the fourth of five series, you would create two instances of the Series class. In this example, the Name property matches the value of the field as specified by the SetDataSeries method:

```
Component Chart &oChart;

&oChart = GetChart(QE_JET_CHARTWRK.QE_JET);
&oChart.Reset();
&oChart.Type = %ChartType_2DBar;

&oChart.SetData(Record.QE_CHART_NPARKS);

&oChart.SetDataYAxis(QE_CHART_NPARKS.QE_VISITORS);
&oChart.SetDataXAxis(QE_CHART_NPARKS.QE_YEARS);

&oChart.SetDataSeries(QE_CHART_NPARKS.QE_PARKNAME);

&oChart.XAxisTitle = "Years";
&oChart.YAxisTitle = "No. of visitors";
&oChart.MainTitle = "Visiting National Parks";

&oChart.HasLegend = True;
```

```
&oChart.LegendPosition = %ChartLegend_Left;

Local Series &S1, &S2;

&S1 = GetSeries();
&S1.Name = "YELLOWSTONE";
&S1.Type = %SeriesType_Line;

&S2 = GetSeries();
&S2.Name = "ARCHES";
&S2.Type = %SeriesType_Area;

&oChart.SetSeries(CreateArray(&S1, &S2));
```

Related Topics

- PeopleCode Language Reference: GetSeries function
- [Series Class Properties](#)
In this section, the Series class properties are presented in alphabetical order.
- [SetSeries method: Chart class](#)

Using the ToolTipLabel Class

The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on chart data points thereby overriding the default tooltips that are automatically created from the chart data.

Using the ToolTipLabel Class with the Chart Class

The essential steps to use the ToolTipLabel class are:

1. Create an instance of the ToolTipLabel class in PeopleCode by using the GetToolTip built-in function:

```
&label1 = GetToolTip();
```

2. Set the ToolTipLabelType and ToolTipLabelValue properties on each ToolTipLabel object that you created.
3. Add the object to an array of ToolTipLabel objects:

```
&tooltip_labels = CreateArray(&label1, &label2);
```


4. Pass the array into the SetToolTipLabels method of the Chart object:

```
&cChart.SetToolTipLabels(&tooltip_labels);
```

Creating Custom Tooltips

To create custom tooltips similar to the following example, you would create three instances of the ToolTipLabel class.

Shoes sales data for North America

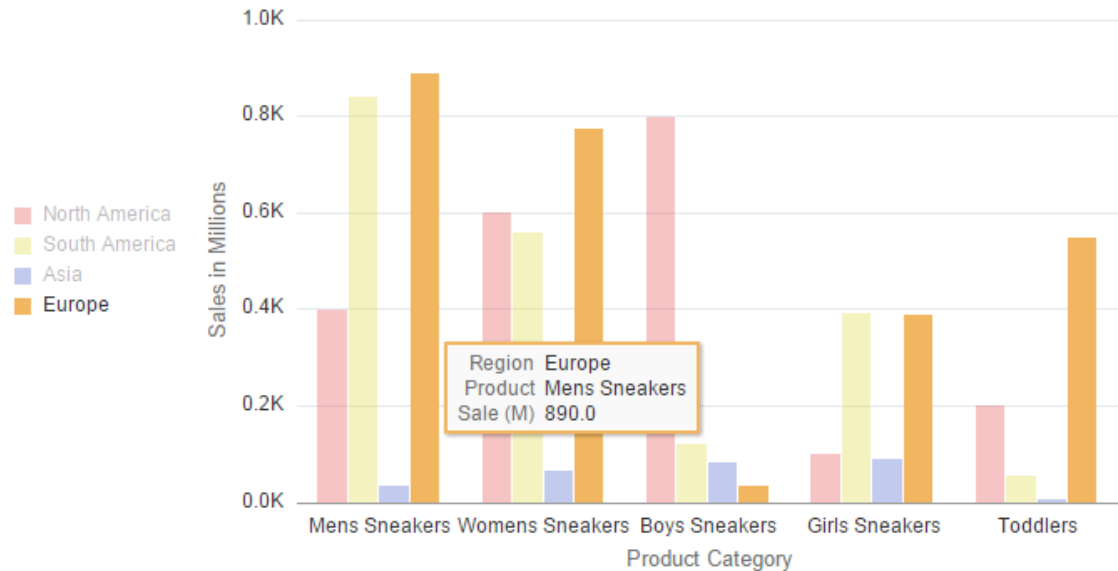

In the preceding example, the custom tooltip displays the x-axis data (%TooltipLbl_X), y-axis data (%TooltipLbl_Y), and the data series (%TooltipLbl_Series). The following PeopleCode program would generate these custom tooltips:

```

/* Declare and instantiate a chart object */
Component Chart &QEChart;
Component TooltipLabel &label1, &label2, &label3;
Component array of TooltipLabel &tooltip_labels;

&QEChart = GetChart(QE_CHART_T2_CHR.QE_CHART_T2_CHRTFL);
&QEChart.Reset();

/* Set the chart parameters for chart descriptions */
&QEChart.Type = %ChartType_2DBar;
&QEChart.MainTitle = "Shoes sales data for North America";
&QEChart.XAxisTitle = "Product Category";
&QEChart.YAxisTitle = "Sales in Millions";
&QEChart.HasLegend = True;

/* Set the chart data record and specify x-axis, y-axis, and series data */
&QEChart.SetData(Record.QE_CHART_T1_PRO);
&QEChart.SetDataXAxis(QE_CHART_T1_PRO.QE_CHART_T1_PROD);
&QEChart.SetDataYAxis(QE_CHART_T1_PRO.QE_CHART_T1_SALES);
&QEChart.SetDataSeries(QE_CHART_T1_PRO.QE_CHART_T1_REGION);
&label1 = GetToolTip();
&label1.TooltipLabelType = %TooltipLbl_X;
&label1.TooltipLabelValue = "Product";
&label2 = GetToolTip();
&label2.TooltipLabelType = %TooltipLbl_Series;
&label2.TooltipLabelValue = "Region";
&label3 = GetToolTip();
&label3.TooltipLabelType = %TooltipLbl_Y;
&label3.TooltipLabelValue = "Sale (M)";

```

```
&tooltip_labels = CreateArray(&label1, &label2, &label3);  
&QEChart.SetToolTipLabel(&tooltip_labels);
```

Related Topics

- PeopleCode Language Reference: GetToolTip function
- [ToolTipLabel Class Properties](#)
In this section, the ToolTipLabel class properties are presented in alphabetical order.
- [SetToolTipLabels method: Chart class](#)

Scope and Data Type of a Chart Object

A Chart object can be instantiated only from PeopleCode. You can use this object only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a Component Interface, and so on.

Chart objects are declared using the Chart data type. For example:

```
Local Chart &MyChart;
```

```
Component Chart &Abs_Hist_Chart;
```

Error Handling

The PeopleCode program is terminated if a field or record is missing at runtime.

If a valid record is specified but no data is found, or for any other error, the chart is replaced by the message "Image creation failed."

If the Java Runtime Environment (JRE) is missing, an error appears and is logged.

Using the Gauge Classes

This section provides an overview of gauge terms and gauge types, and discusses how to use the gauge classes

Understanding Gauge Terms

The following is a list of terms pertaining to the gauge classes and their descriptions:

Field or Control	Description
Metric	Refers to the actual numeric data point that you want to display in the gauge.
Tick marks	Refers to the major and minor markings along the value axis of the gauge.
Threshold values	(Optional) Provide additional context about the metric that you display in your gauge. On dial and status meter gauges you can add bands of color to the background by associating an instance of the Threshold class, typically to help indicate whether the metric is low, medium, or high.

Gauge Types

Use the gauge classes to create gauges that display metrics in several common formats, including status meters, LEDs, and ratings.

Three gauge classes are available: `LEDGauge`, `RatingGaugeChart`, and `StatusMeterGauge`. Each of these gauges must be implemented and instantiated as a different class.


Of these gauge types, the `LEDGauge` and `StatusMeterGauge` classes share many common characteristics, including the methods you can invoke and the properties you can set. While rating gauges share some characteristics with the other gauge types, the `RatingGaugeChart` class and supporting classes are described separately within this topic.

The following examples use the same value, 54.5, as the gauge metric. In addition, an instance of the `Threshold` class is used to specify the color shading on the dial gauge and the status meter gauge, as well as the color of the LED.

Example of an LED Gauge

The following example displays an LED gauge:


Sales of new Cars



Example of a Status Meter Gauge

The following example displays a status gauge:

Sales of new Cars

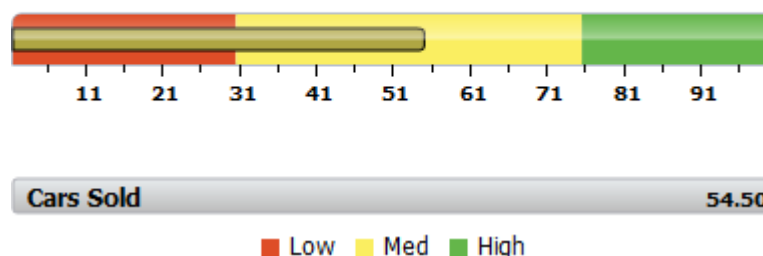

Creating Gauges Using the Gauge Classes

You can specify a field in a rowset and have it depicted graphically as a gauge with minimal PeopleCode. The data in the field must be numeric. You can also choose to make the gauge interactive.

The high-level steps involved in creating any gauge are:

1. Identify a field on a record that has a numeric value that you want to show in a gauge.
2. Add a chart area to a page in Application Designer. Associate the record and field in Step 1 with that chart area.
3. In PeopleCode instantiate a gauge object using one of the built-in functions available for gauges:
 - `GetLEDGauge`
 - `GetRatingGauge`
 - `GetStatusMeterGauge`
4. Set property values for the gauge object as needed, keeping in mind the design guidelines below. Most properties have default values, so you can start by reviewing your gauge with no properties set and then set those that you need to in order to tailor the appearance and functionality of the gauge.
5. Depending on the gauge type:
 - For the `LEDGauge` and `StatusMeterGauge` classes, optionally, create an instance of the `Threshold` class and associate it with your instance of the gauge.
 - For the `RatingGaugeChart` class, create instances of the `RatingGaugeState` class and of the `GaugeThreshold` class and associate them with your instance of the gauge.

Design Guidelines

The following design guidelines apply to dial gauges, LED gauges, and status meter gauges only.

Sizing

The height and width for a gauge is determined differently depending on whether the chart control for the gauge appears on a fluid page or a classic page:

- See [Fluid Mode Considerations for Charts and Gauges](#)
- See [Sizing a Chart or Gauge in Classic Mode](#)

The overall dimensions of the gauge area will be used and will need to hold all the elements that you choose to have along with the gauge graphic itself. This includes:

- Top labels
- Bottom labels
- Metric labels
- Legends

The more elements that you want to include in the gauge area, the smaller the gauge graphic will become. The gauge rendering software will try to make a best fit.

As you design your gauge, it's important to carefully consider what you want your gauge to contain and to review the results of your gauge as you use edge cases of small and large values and labels as well as most likely cases. Also, consider the design of your gauge in the context of the rest of the page in which the gauge will appear. For example, do other elements on the page provide enough context so that you can reduce or eliminate the use of labels and legends in the gauge area?

Scaling

You can use the `GaugeMinimum` and `GaugeMaximum` properties to provide the low and high points of your dial or status meter gauge. Knowledge of the nature of your data will help you determine an appropriate scale.

You'll also want to consider for a gauge whether you want the gauge minimums and maximums to be static (for example, minimum of 0 and maximum of 100 because test results can only fall within that range), or whether you want them to be dynamic (for example, make the minimum half of the metric value and make the maximum 50% greater than the metric value).

Labels

Three types of labels can be placed in the gauge – a top label, a bottom label, and a label for the metric. The top and bottom labels are customizable – they can be any text you desire. The metric label will always be the numeric value of the gauge metric.

The labels can be positioned in different locations along with the gauge. Any label can be placed inside the gauge. Additionally, top labels can appear above the gauge, bottom labels can appear below the gauge, and metric labels can be positioned with the bottom label or below it.

Generally, it's better to constrain the use of labels to the minimum needed. Labels will take up space from the gauge itself, making the gauge smaller, and too much text in a label can result in ellipses that don't look good and can be difficult to read.

Reference Areas and Legends

You can provide additional context about the metric that you display in your dial gauge, LED gauge, or status meter gauge by associating an instance of the `Threshold` class to the gauge using the `SetThreshold` method (available with all gauge classes). On dial and status meter gauges, you can add bands of color to the gauge background, typically to help indicate whether the metric is low, medium, or high. On LED gauges the values in the threshold instance determine the color and direction of the LED.

For more information on using the `Threshold` class, see [Using the Threshold Class](#).

A legend is available if you use thresholds. The legend will show the colors and descriptions of all reference areas on your gauge.

Tick Marks


Tick marks on status meter gauges can often provide useful context information but possibly at the cost of making the gauge appear busy and cluttered. You should try them to see if they work for your situation.

Gauge Interactivity

You can make your gauges interactive. You can either run `FieldChange` PeopleCode or redirect users to a URL. Interactivity will be initiated when a user clicks on (or touches) the gauge.

As illustrated in the following flowchart, in order to have your gauge be interactive, you must set the `IsDrillable` property to `True`. Then, if you have set the `GaugeURL` property to a valid URL, a click will redirect the user to that URL. If `GaugeURL` is not set, but there is `FieldChange` PeopleCode on the field that defines the gauge's metric (that is, the field you passed into the `GetStatusMeterGauge` or `GetLEDGauge` function), then that PeopleCode will run. Otherwise, if

neither GaugeURL is set nor FieldChange PeopleCode is present, then there is no interactivity even if IsDrillable is True.

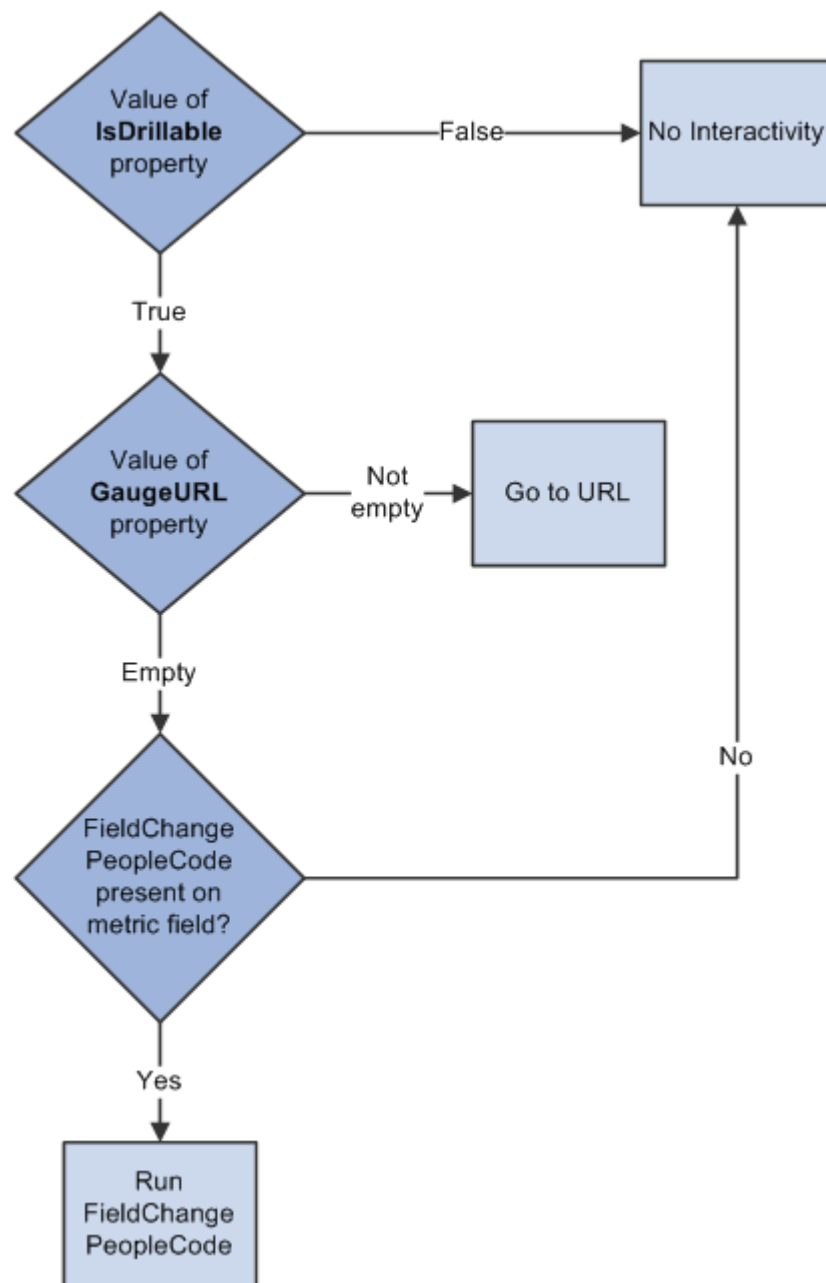

Using the Threshold Class

The Threshold class is used in conjunction with the two gauge classes: LEDGauge and StatusMeterGauge. The Threshold class provides a way to add reference areas and color coding to your gauges.

On the LED gauge, the Threshold class can be used to color the LED gauge according to the defined threshold values.

Rosanna Channing**2014 Salary**

■ Below Range ■ Within Range
■ Above Range

Creating Thresholds Using the Threshold Class

To use the Threshold class, follow these basic steps:

1. Create an instance of the Threshold class in PeopleCode by using the GetThreshold built-in function:

```
&thrshld = GetThreshold();
```

2. Set the properties on the instance of Threshold class that you created.
3. Associate the instance of the Threshold class to an instance of one of the gauge classes.

```
&gauge.SetThreshold(&thrshld);
```

Using Thresholds with Gauges

The following example presents a LED gauge with color from the Threshold class:

Rosanna Channing**2014 Salary**

■ Below Range ■ Within Range
■ Above Range

To render the gauge in this way, you would create an instance of the Threshold class. Each property of the Threshold class is an array that you would populate as follows:

Values array	Colors array
Value of first threshold	Yellow

Values array	Colors array
Value of the second threshold	Green
NA	Red

A user-defined PeopleCode function that instantiates this instance of the Threshold class looks like this:

```
Function bld_thrshld Returns Threshold;
    Local Threshold &thrshld;
    &thrshld = GetThreshold();
    &thrshld.Values = CreateArray(CJY_SLRY.CJY_SLRY_MIN,
CJY_SLRY.CJY_SLRY_MAX);
    &thrshld.Colors = CreateArray(%ChartColor_Yellow, %ChartColor_Green,
%ChartColor_Red);
    Return &thrshld;
End-Function;
```

However, you can add a Descriptions array to control what is displayed in data hints and in the legend:

Values array	Descriptions array	Colors array
Value of first threshold	Below Range	Yellow
Value of the second threshold	Within Range	Green
NA	Above Range	Red

The Descriptions array is added to the same user-defined PeopleCode function:

```
Function bld_thrshld Returns Threshold;
    Local Threshold &thrshld;
    &thrshld = GetThreshold();
    &thrshld.Values = CreateArray(CJY_SLRY.CJY_SLRY_MIN,
CJY_SLRY.CJY_SLRY_MAX);
    &thrshld.Descriptions = CreateArray("Below Range", "Within Range", "Above
Range");
    &thrshld.Colors = CreateArray(%ChartColor_Yellow, %ChartColor_Green,
%ChartColor_Red);
    Return &thrshld;
End-Function;
```

Related Topics

- [Threshold Class Properties](#)
In this section, the Threshold class properties are presented in alphabetical order.

Using the Rating Gauge Classes

Rating gauges are typically used to display or accept user feedback on a product or service. A rating gauge can be interactive or display only.

Display-only rating gauges (the `ReadOnly` property is `True`) set the gauge to the value of the field that was used when the rating gauge was created with the `GetRatingGauge` built-in function. The value of the rating gauge cannot be changed by the user.

Interactive rating gauges (the `ReadOnly` property is `False`) can update the underlying value in the `RECORD.FIELD` that was used when the rating gauge was created with the `GetRatingGauge` built-in function. If there is `FieldChange` `PeopleCode` on the field, the `PeopleCode` executes only for an interactive rating gauge.

The display of a rating gauge can be changed in two ways:

- Based on the state of the rating gauge.
- Based on threshold values against which the value of the rating gauge is compared.

A rating gauge can support four different states depending on the chart type:

- Unselected
- Selected
- Hover (interactive only)
- Changed (interactive only)

Here's an example of a gauge transitioning through three states. Each state displays the gauge data differently:

Field or Control	Description
	A rating gauge in the unselected state.
	A rating gauge in the hover state.
	A rating gauge in the selected state.

You can set the display characteristics for each state using the `RatingGaugeState` class. You create an instance of this class, set its properties, and assign the instance to the corresponding state property on the `RatingGaugeChart` instance that you created.'

In addition, a rating gauge supports up to three thresholds. Different thresholds can cause the rating gauge to change color and present different tooltip text based on the gauge value:

Field or Control	Description
	A rating gauge with thresholds (Outstanding rating)
	A rating gauge with thresholds (Satisfactory rating)

You can set the characteristics for each threshold value using the `GaugeThreshold` class. You create an instance of this class and set its properties, including the threshold maximum. Create an array of `GaugeThreshold` instances and assign the array to the `RatingGaugeChart` object

using its `SetRatingGaugeThresholds` method. If a gauge color or border color is set in a gauge threshold, those colors override the colors set by the rating gauge states.

Related Topics

- [PeopleCode Language Reference: GetRatingGauge function](#)
- [PeopleCode Language Reference: GetRatingGaugeState function](#)
- [RatingGaugeChart Class Methods](#)
In this section, the `RatingGaugeChart` class methods are presented in alphabetical order.
- [RatingGaugeChart Class Properties](#)
In this section, the `RatingGaugeChart` class properties are presented in alphabetical order.
- [RatingGaugeState Class Properties](#)
In this section, the `RatingGaugeState` class properties are presented in alphabetical order.

Scope and Data Type of Gauge Objects

Any gauge and threshold objects can be instantiated from PeopleCode only. You can use these objects only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a component interface, and so on.

Gauge objects are declared using the one of the three gauge classes data types. For example:

```
Component LedGauge &oLED;  
Component RatingGaugeChart &oRating;  
Component StatusMeterGauge &oSM;
```

In addition, optional threshold objects for use with dial gauges, LED gauges, and status meter gauges are declared using the `Threshold` class:

```
Component Threshold &oThrshld;
```

Gauge state objects and gauge threshold objects for use with rating gauges are declared using the `RatingGaugeState` class and the `GaugeThreshold` class respectively:

```
Local RatingGaugeState &oRatGaugeSelState, &oRatGaugeUnSelState,  
&oRatGaugeHovState, &oRatGaugeChangState;
```

```
Local GaugeThreshold &oGTresh1, &oGTresh2, &oGTresh3, &oGTresh4;
```

Error Handling

The PeopleCode program is terminated if a field or record is missing at runtime.

If a valid record is specified but no data is found, or for any other error, the chart is replaced by the message "Image creation failed."

If the Java Runtime Environment (JRE) is missing, an error appears and is logged.

Properties of the Gauge Classes

The properties can be grouped as follows:

- Gauge type – You can select different visual representations for each gauge class

- Minimums and maximums – You can specify the range of values that you want the gauge to cover
- Labels – You can determine which, if any, labels, you want to accompany the gauge
- Gauge increments – Specify gauge increments if more numeric context is needed.
- Legends – A legend can be displayed to help users interpret the reference areas.
- Animation – You can choose the type and duration of animation for the gauge display.
- Interactivity – You can choose to have an event occur if the user clicks (or touches) the gauge.

Category	LEDGauge	StatusMeterGauge	RatingGaugeChart
Gauge type	Type property: LEDGauge class	Type property: StatusMeterGauge class	NA
Minimums and maximums	NA	Height property: StatusMeterGauge class	NA
	Width property: LEDGauge class	Width property: StatusMeterGauge class	Width property: RatingGaugeChart class
	NA	GaugeMinimum property: StatusMeterGauge class	Min property: RatingGaugeChart class
	NA	GaugeMaximum property: StatusMeterGauge class	Max property: RatingGaugeChart class
	GaugeDecimalDigit property: LEDGauge class	GaugeDecimalDigit property: StatusMeterGauge class	NA
Labels	AspectRatio property: LEDGauge class	AspectRatio property: StatusMeterGauge class	AspectRatio property: RatingGaugeChart class
	NA	NA	Title property: RatingGaugeChart class
	TopLabel property: LEDGauge class	TopLabel property: StatusMeterGauge class	NA
	BottomLabel property: LEDGauge class	BottomLabel property: StatusMeterGauge class	NA
	TopLabelPosition property: LEDGauge class	TopLabelPosition property: StatusMeterGauge class	NA
	BottomLabelPosition property: LEDGauge class	BottomLabelPosition property: StatusMeterGauge class	NA
	MetricLabelType property: LEDGauge class	MetricLabelType property: StatusMeterGauge class	NA
	MetricLabelPosition property: LEDGauge class	MetricLabelPosition property: StatusMeterGauge class	NA
Gauge Increments	NA	MajorTickIncrement property: StatusMeterGauge class	Step property: RatingGaugeChart class


Category	LEDGauge	StatusMeterGauge	RatingGaugeChart
Legends	NA	MinorTickIncrement property: StatusMeterGauge class	NA
	NA	NA	NA
Animation	LegendPosition property: LEDGauge class	LegendPosition property: StatusMeterGauge class	NA
	AnimationType property: LEDGauge class	AnimationType property: StatusMeterGauge class	NA
Interactivity	AnimationDuration property: LEDGauge class	AnimationDuration property: StatusMeterGauge class	NA
	IsDrillable property: LEDGauge class	IsDrillable property: StatusMeterGauge class	ReadOnly property: RatingGaugeChart class
Miscellaneous	GaugeURL property: LEDGauge class	GaugeURL property: StatusMeterGauge class	NA
	AdditionalStyleSuffix property: LEDGauge class	AdditionalStyleSuffix property: StatusMeterGauge class	NA
Gauge state	NA	NA	ChangedState property: RatingGaugeChart class
	NA	NA	HoverState property: RatingGaugeChart class
	NA	NA	SelectedState property: RatingGaugeChart class
	NA	NA	UnselectedState property: RatingGaugeChart class

Using the Spark Chart Classes

Spark charts are used to visualize the trend of a data set in a compact form factor. They are best used to view trends over time, especially when paired with additional context such as in a table. Absolute values and individual data points are not emphasized, so spark charts should not be used to visualize data where such things are important.

While the typical chart is designed to show as much data as possible, spark charts are intended to be succinct, memorable, and located where they are discussed.

The following example illustrates five spark chart types: an area chart, a bar chart, a floating bar chart, a line chart, and a line with area chart.

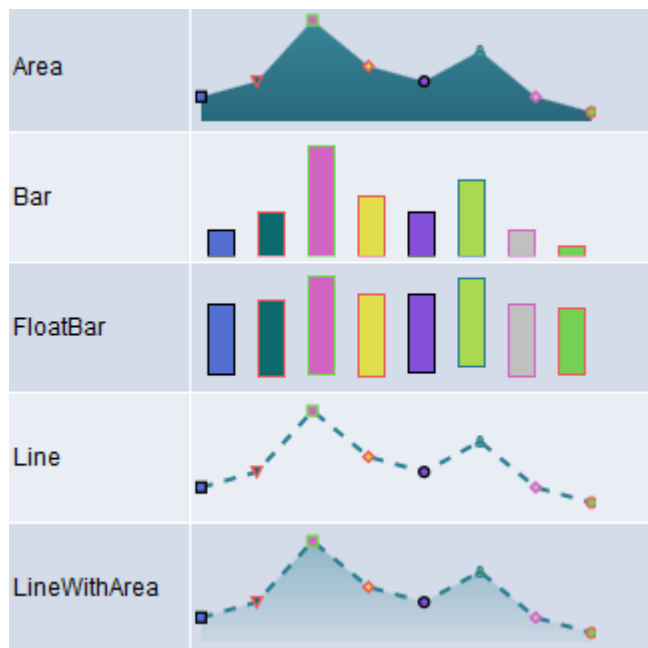

Spark charts should be used to convey trend and relative change, not detail values. The spark chart does not have axis labels or any other text. Thus, the axes must be intuitive to the viewer. In a spark chart, the y-axis is almost always numerical and the x-axis is either numerical or a time series.

A typical example of a spark chart is a stock pricing chart. In PeopleSoft applications, spark charts might be good for showing data such as general ledger account balances over time or a grid displaying employee vacation balances over time.

Typically, spark charts are defined as interactive, so that clicking or touching one would take the user to more detail. You can define the interaction result to be a URL or a PeopleCode program.

To create a spark chart on a page you need to:

1. Place a chart control on a page in Application Designer.
2. Create an instance of the SparkChart class in PeopleCode.



```
&aS = GetSparkChart(RECORD_NAME.FIELD_NAME);
```
3. Create one or more instances of the SparkChartItem class in PeopleCode.


```
&aS1 = GetSparkChartItem();
```
4. Add those SparkChartItem instances to an array.
5. Associate the array to the SparkChart class instance.

```
&aS.SetSparkChartItems(CreateArray(&aS1, &aS2, ...));
```

Creating Spark Charts

The following example displays the five spark chart types: bar chart, line chart, area chart, line with area chart, and floating bar chart.

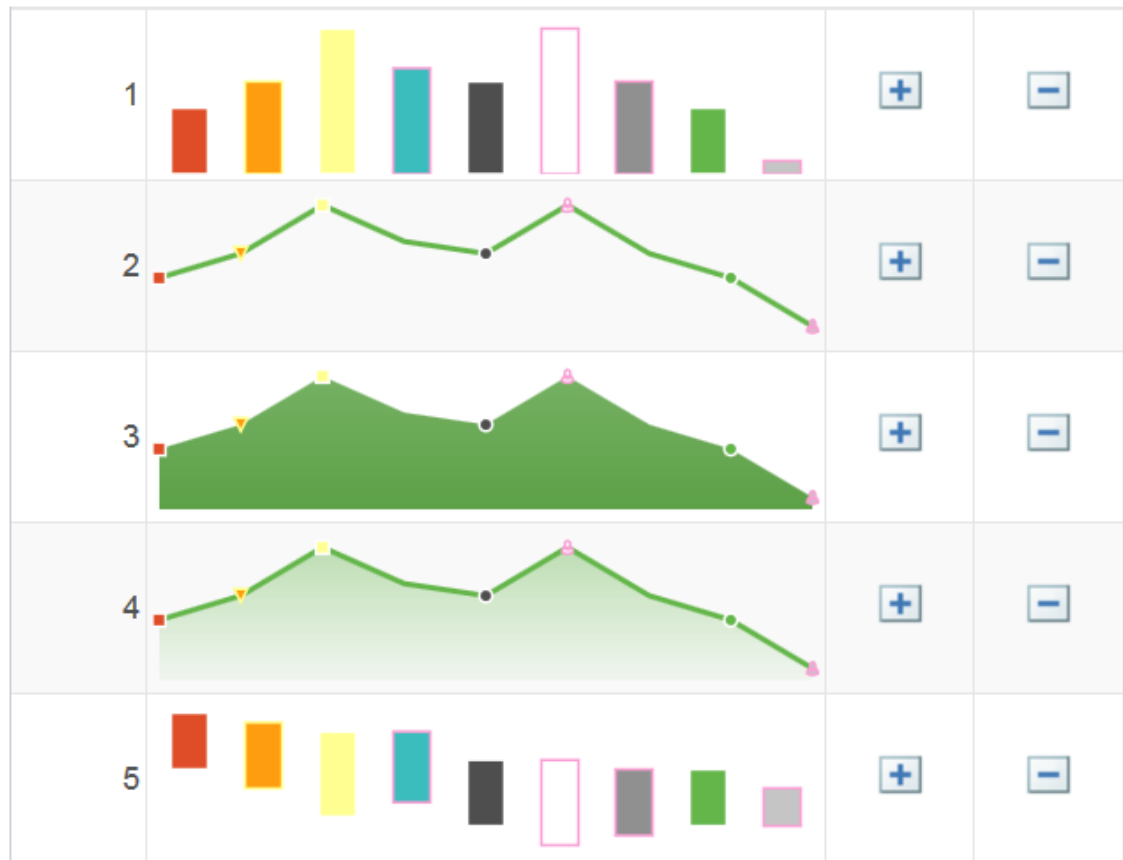

The following PeopleCode example was used to generate the preceding spark charts. The properties for each spark chart item determine its value, color, marker type, and so on.

```
Local SparkChart &aS;
Local SparkChartItem &aS1, &aS2, &aS3, &aS4, &aS5, &aS6, &aS7, &aS8, &aS9;

&aS = GetSparkChart(QE_DVTSCR_WRK.QE_CHRT1);

&aS1 = GetSparkChartItem();
&aS1.Value = 60;
&aS1.FloatValue = 60;
&aS1.Color = 10;
&aS1.BorderColor = 18;
&aS1.MarkerDisplayed = True;
&aS1.MarkerShape = %SparkMarker_Square;
&aS2 = GetSparkChartItem();
&aS2.Value = 70;
&aS2.FloatValue = 40;
&aS2.Color = 8;
&aS2.BorderColor = 11;
```

```
&aS2.MarkerDisplayed = True;
&aS2.MarkerShape = %SparkMarker_TriangleDown;

&aS3 = GetSparkChartItem();
&aS3.Value = 90;
&aS3.FloatValue = 10;
&aS3.Color = 11;
&aS3.BorderColor = 18;
&aS3.MarkerDisplayed = True;
&aS3.MarkerShape = %SparkMarker_Auto;
&aS4 = GetSparkChartItem();
&aS4.Value = 75;
&aS4.FloatValue = 25;
&aS4.Color = 2;
&aS4.BorderColor = 9;
&aS4.MarkerDisplayed = False;
&aS4.MarkerShape = %SparkMarker_Diamond;

&aS5 = GetSparkChartItem();
&aS5.Value = 70;
&aS5.FloatValue = 0.1;
&aS5.Color = 3;
&aS5.BorderColor = 18;
&aS5.MarkerDisplayed = True;
&aS5.MarkerShape = %SparkMarker_Circle;
&aS6 = GetSparkChartItem();
&aS6.Value = 90;
&aS6.FloatValue = - 20;
&aS6.Color = 68;
&aS6.BorderColor = 9;
&aS6.MarkerDisplayed = True;
&aS6.MarkerShape = %SparkMarker_Human;

&aS7 = GetSparkChartItem();
&aS7.Value = 70;
&aS7.FloatValue = - 10;
&aS7.Color = 4;
&aS7.BorderColor = 9;
&aS7.MarkerDisplayed = False;
&aS7.MarkerShape = %SparkMarker_Diamond;

&aS8 = GetSparkChartItem();
&aS8.Value = 60;
&aS8.FloatValue = 0.1;
&aS8.Color = 5;
&aS8.BorderColor = 18;
&aS8.MarkerDisplayed = True;
&aS8.MarkerShape = %SparkMarker_Circle;
&aS9 = GetSparkChartItem();
&aS9.Value = 40;
&aS9.FloatValue = 0.1;
&aS9.Color = 6;
&aS9.BorderColor = 9;
&aS9.MarkerDisplayed = True;
&aS9.MarkerShape = %SparkMarker_Human;
&aS.Width = 200;
```

```

&aS.AspectRatio = 0.3;

&aS.AnimationDuration = 1;
&aS.AnimationType = 1;
Local integer &row;
&row = CurrentRowNumber();
Evaluate &row
When 1
    &aS.Type = %SparkChart_Bar;
When 2
    &aS.Type = %SparkChart_Line;
When 3
    &aS.Type = %SparkChart_Area;
When 4
    &aS.Type = %SparkChart_LineWithArea;
When 5
    &aS.Type = %SparkChart_FloatingBar;
End-Evaluate;

&aS.IsDrillable = True;
&aS.LineType = %SparkLine_Straight;
&aS.LineStyle = %SparkLineStyle_Solid;
&aS.barGapRatio = 0.5;
&aS.LineWidth = 2;
&aS.SparkChartURL = "www.yahoo.com";
&aS.Title = "spark title2";
&aS.Color = %ChartColor_Green;

&aS.SetSparkChartItems(CreateArray(&aS1, &aS2, &aS3, &aS4, &aS5, &aS6, &aS7,
&aS8, &aS9));

```

Related Topics

- PeopleCode Language Reference: GetSparkChart function
- PeopleCode Language Reference: GetSparkChartItem function
- [SetSparkChartItems method: SparkChart class](#)
- [SparkChart Class Properties](#)
In this section, the SparkChart class properties are presented in alphabetical order.
- [SparkChartItem Class Properties](#)
In this section, the SparkChartItem class properties are presented in alphabetical order.

Using the Gantt Class

Use the Gantt class to create Gantt charts. A Gantt chart displays tasks and milestones along a time line. Gantt charts are frequently used in project management because they provide a graphical illustration of a schedule, which helps in planning, coordinating, and tracking project tasks.

This section provides an overview of Gantt chart terminology and discusses how to use the Gantt Class.


Understanding Gantt Chart Terms

Many of the elements, such as titles and labels, available on conventional chart like the bar chart are also available on the Gantt chart. The following terms apply specifically to Gantt charts:

Field or Control	Description
Activity or Task	See Task .
Baseline	A point-in-time snapshot of the project plan that allows the user to identify how the project plan has changed since that point in time.
Data area	The part of the chart that graphically shows the span of dates that each task (or activity) covers. (This area is the right side of the displayed chart.)
Dependencies	A relationship between one task and other tasks that drives when tasks can begin and end. A dependent task cannot start before the task it is dependent on is either started or completed (depending on business rules defined in the application).
Milestone	A specialized mark on the chart that names a meaningful point in time.
Resource	A source of supply or support that is assigned to work on an activity or task.
Task or Activity	In a Gantt chart, each row (task or activity), is represented in the y-axis of the chart, and the span of dates for each row is displayed on the x-axis.
X-axis	The x-axis displays dates that are spanned by items in the y-axis.
X-axis labels	The part of the chart that lists the time scale. The x-axis labels support multiple levels of granularity: second, minute, hour, day, week, month, year.
Y-axis	The y-axis is the display of tasks or activities, and is displayed as rows.
Y-axis labels	The part of the chart that lists activities and their attributes. Activities are shown hierarchically, and subtasks can be hidden or displayed by expanding or collapsing higher level tasks.

Using Gantt Charts in the PeopleSoft Pure Internet Architecture

The Gantt chart consists of two sections: a table section and a chart section.

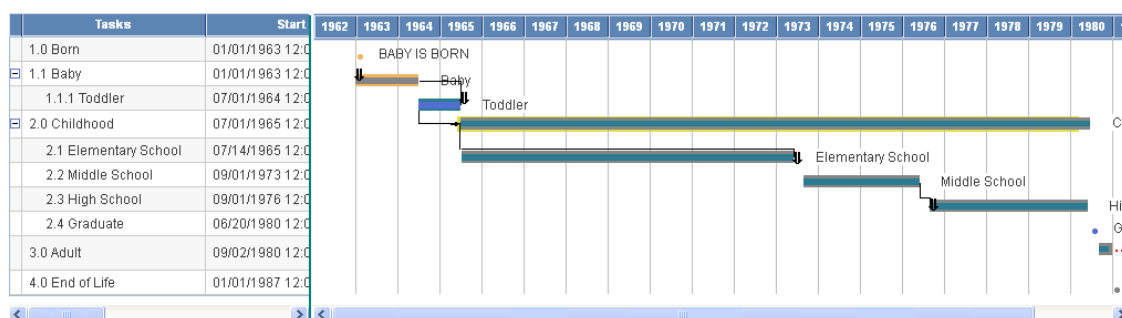

The left side of the chart, where you see the table, is the table section. The other side, where you see the bars, is the chart section. Horizontal scroll bars below the table section support scrolling through the task-related columns; below the task section, they support scrolling through the charted tasks. Vertical scroll bars (when present) support scrolling through the task list.

Table Section

The table section contains all of the tasks and associated subtasks, and displays them in a hierarchy. Tasks that contain subtasks are called *parent tasks*, and subtasks are called *child tasks*. You can click on the expand (collapse) image to the left of the task name (Baby, above) to expand or collapse the subtask hierarchy. Note that subtasks may also act as parent tasks to other subtasks.

Each task has a name (Born, Baby, Childhood, and so on). It also has a level. Parent tasks have a higher level than child tasks.

Chart Section

The chart section displays the tasks, task dependencies, and milestones graphically.

In the previous example, each horizontal bar represents a single task. The progress bar (that is, the percentage complete for a particular task) is indicated with a bar of a different color above the task bar. The milestone date (Graduate in the previous example) is represented with a circle.

You can also have dependencies between tasks. These are represented as lines connecting the task bars.

You can execute custom FieldChange PeopleCode when a user clicks a task bar or a task dependency line.

User Interaction

A user can interact directly with a chart to change the underlying chart data.

These user actions are supported:

- Resize the task bar.
- Reposition the task bar.
- Reposition a milestone glyph.
- Move the separator between the table section and the chart section.
- Update task details, task start time and end time, and the progress bar.

When a user changes values in the chart section by dragging and dropping bars, the Planned Start, Planned End, and Progress values in the grid column will also be updated if the grid and the chart section use the same record and fields.

Note

Drag-and-drop is not supported on an Apple iPad.

You can control the level the user is able to interact with the chart using the Gantt class properties `InteractiveStart`, `InteractiveEnd`, `InteractiveProgress`, and `InteractiveMove`.

See [InteractiveStart property: Gantt class](#), [InteractiveEnd property: Gantt class](#), [InteractiveProgress property: Gantt class](#), [InteractiveMove property: Gantt class](#).

Creating Gantt Charts Using the Gantt Class

Every Gantt chart has at least one data set used to define the tasks and the information related to each task, such as start date, end date, milestones, percent finished, and so on.

A second data set can be used to describe dependencies between tasks.

The following methods are required for using the Gantt chart:

- **SetTaskData**
Use this method to specify where most of the information for the Gantt chart is stored. You can specify either a rowset or a record.
- **SetTaskID**
Use this method to specify the task ID, or name, of the task. Every task must have a unique task identifier. The task ID is used to support task linking and dependencies.
- **SetPlannedStartDate**
Use this method to specify the planned starting date of the task. Each task must have its own planned starting date.
- **SetPlannedEndDate**
Use this method to specify the planned ending date of the task. Each task must have its own planned ending date.

Though not required, Oracle recommends using the `SetTaskName` method to display meaningful information in the table section of the Gantt chart.

If you only use the required methods and do not use the `SetTaskAppData` method, Oracle recommends that you also use the `SetChartArea` method and dedicate most, if not all, of the entire area to the chart, and not the table.

If you specify one actual date, either for start or end, then you must specify the other (`SetActualStartDate`, `SetActualEndDate`).

In addition, if you want to use dependency data, the following methods are required:

- **SetTaskDependencyData**
Use this method to specify where most of the information for the dependency data is stored. You can specify either a rowset or a record.
- **SetTaskDependencyParentID**

In a dependency, one task depends on another. Use this method to specify the parent task, that is, the one that the other (child) task depends upon.

- `SetTaskDependencyChildID`

In a dependency, one task depends on another. Use this method to specify the child task, that is, the one that depends on another.


Specifying Time Line Axis Formats

The date-time axis (the x-axis) of a Gantt chart is referred to as the “time line” axis. You can control the display label format for the time line through a combination of user personalization settings and various Gantt class methods for setting date entity formats. These settings and methods are described in this documentation. The time line’s start and end can also be adjusted by using the Timeline Range picker or by using the `AxisStartDateTime` and `AxisEndDateTime` methods. If none of the properties or methods is set for controlling the time line, then the charting engine plots the time line based on the time difference between the earliest start date and latest end date of all tasks in the Gantt chart.

The time line axis can display the following units of measure: years, months, days, hours, minutes, and seconds. The time line does not support the following units: centuries, quarter years (such as Q1, Q2, and so on), weeks, and milliseconds.

Depending on the time difference between the earliest start date/time and latest end date/time of the data displayed in the Gantt chart, the chart is displayed with a minor axis only, or with major and minor axes.


The following Gantt chart displays a minor axis only due to the wide range between the start and end dates of the displayed data:

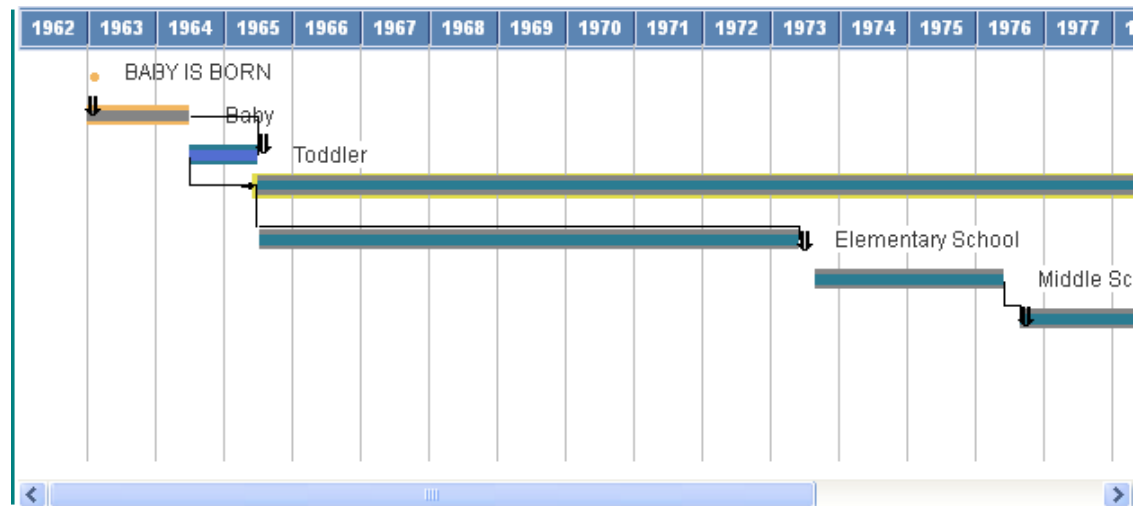


Valid pairs of major and minor axes include:

- Year and month
- Month and day
- Day and hour
- Hour and second


The following Gantt chart displays both a major and a minor axis:

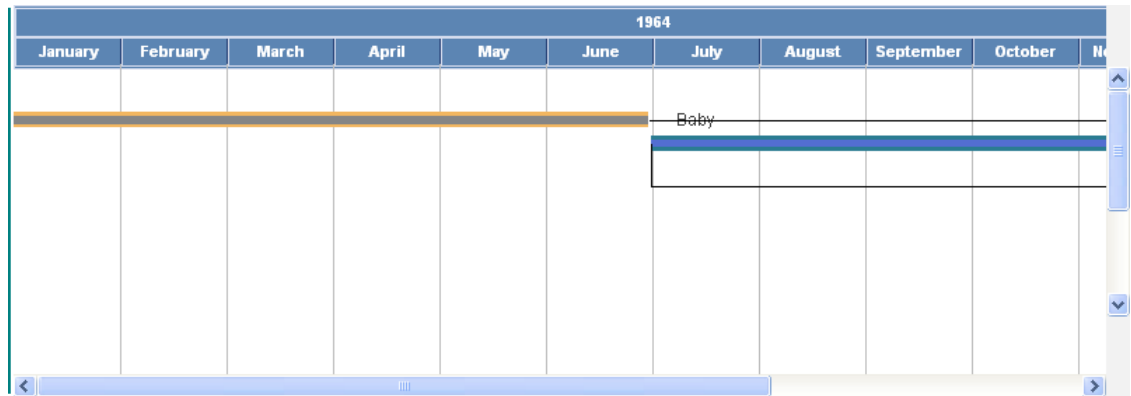

The Timeline Range picker is activated by clicking a date on the time line. Use the Timeline Range picker to specify the start and end date and time for the data to be displayed in the Gantt chart:

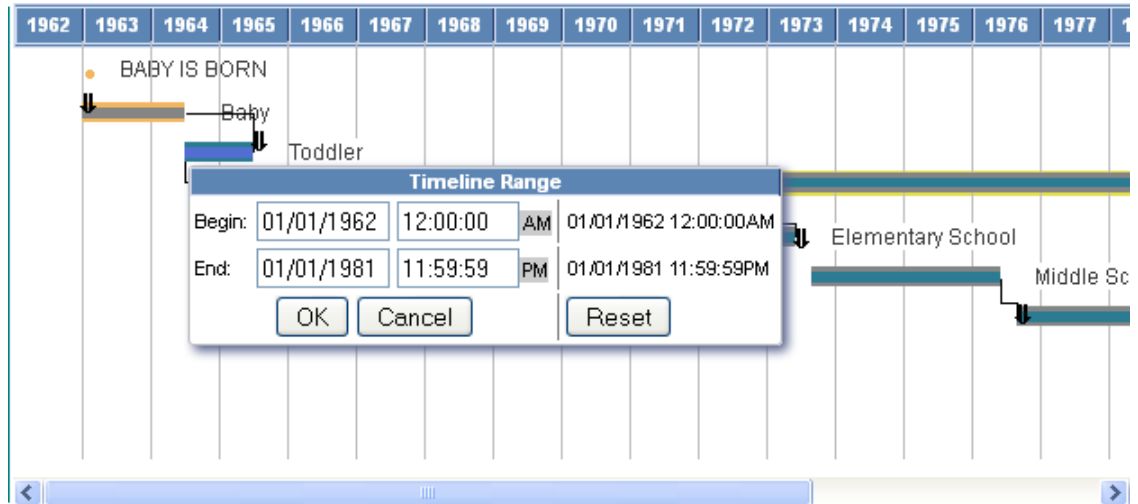

The date slider is activated by clicking a time in the Timeline Range picker. Click AM or PM to toggle between these two settings.

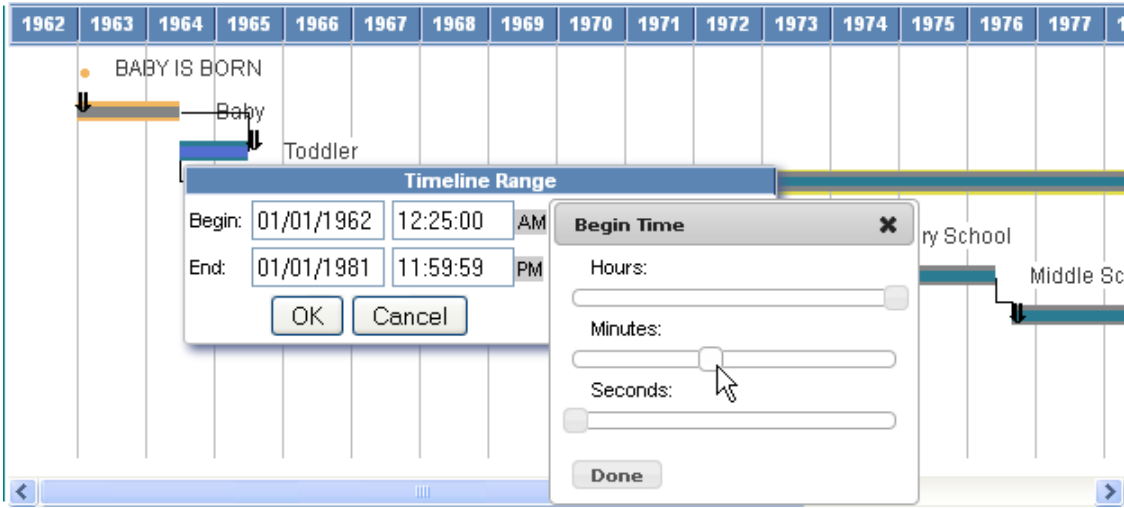

Working with Start and End Dates

You must set the end date to be after the start date, for both the planned as well as actual dates, or else you will receive an error.

Both the start and end dates you specify for a task must fall within the axis dates, that is, the dates specified by the `AxisEndDateTime` and `AxisStartDateTime` properties. If you specify task dates that fall outside of the axis dates, the task appears in the table section of the Gantt chart, but no bar appears in the chart section of the Gantt chart, even if one of the dates falls *inside* the axis dates.

Using Gantt Glyphs

You can use all of the following glyphs with a Gantt chart. You can use either the numeric or constant value.

Note

For values that have been desupported, the new value is substituted automatically.

Numeric Value	Constant Value	Glyph	Notes
1	%ChartGlyph_Axe	NA	This constant has been desupported; use %ChartGlyph_X (17) instead.
2	%ChartGlyph_Bar	NA	This constant has been desupported; use %ChartGlyph_Exclamation (13) instead.
3	%ChartGlyph_Box	NA	This constant has been desupported; use %ChartGlyph_Fisheye (25) instead.
4	%ChartGlyph_Circle	●	NA
5	%ChartGlyph_Cross	NA	This constant has been desupported; use %ChartGlyph_Dagger (20) instead.
6	%ChartGlyph_Diamond	◆	NA

Numeric Value	Constant Value	Glyph	Notes
7	%ChartGlyph_Dodecahedron	NA	This constant has been desupported; use %ChartGlyph_Triangle_Inverted (18) instead.
8	%ChartGlyph_Icosahedron	NA	This constant has been desupported; use %ChartGlyph_Star (11) instead.
9	%ChartGlyph_Sphere	NA	This constant has been desupported; use %ChartGlyph_CrossHairs (21) instead.
10	%ChartGlyph_Square	■	NA
11	%ChartGlyph_Star	★	NA
13	%ChartGlyph_Exclamation	!	NA
14	%ChartGlyph_QuestionMark	?	NA
15	%ChartGlyph_Asterisk		NA
16	%ChartGlyph_Check		NA
17	%ChartGlyph_X	×	NA
18	%ChartGlyph_Triangle_Inverted	▼	NA
19	%ChartGlyph_Dollar	\$	NA
20	%ChartGlyph_Dagger	†	NA
21	%ChartGlyph_CrossHairs	⊕	NA
22	%ChartGlyph_Euro	€	NA
23	%ChartGlyph_Yen	¥	NA
24	%ChartGlyph_PoundSterling	£	NA
25	%ChartGlyph_Fisheye	●	NA

Scope and Data Type of a Gantt Object

A Gantt object can be instantiated only from PeopleCode. You can use this object only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a Component Interface, and so on.

Gantt objects are declared using the Gantt data type. For example:

```
Local Gantt &MyGantt;
```

Error Handling

The PeopleCode program is terminated if a field or record is missing at runtime.

If a valid record is specified but no data is found, or for any other error, the chart is replaced by the message "Image creation failed."

Using the OrgChart Class

Use the OrgChart class to create organization charts. An organization chart represents hierarchical data as boxes arrayed in levels, which can be oriented top to bottom, with horizontal rows, or left to right, with vertical rows. Connectors show parent and child relationships between boxes on adjacent levels.

You can use this chart type to display many different types of hierarchical relationships, including, but not limited to:

- People in organizations
- Positions in organizations
- Departments in organizations
- Components in bills of materials

This section provides an overview of organization chart terminology and discusses how to use the OrgChart Class.

Understanding Organization Chart Terms

Organization charts can be composed of many different elements, such as the main chart, nodes, connectors, pop-up nodes, and so on. These terms apply specifically to organization charts:

Field or Control	Description
Breadcrumbs	You can configure an organization chart to optionally display links at the top of an organization chart. Typically, these are the names of people in an organization hierarchy.
Child node	A node that is one level below its parent node (except for the top-level node). Every node except the top-level node has one parent node.
Connector	Lines that link the boxes in an organization chart. Connectors denote parent and child relationships. A connector also shows the relationship between a pop-up node and the predecessor node of the pop-up.
Descriptor	A text string that conveys information about a node. A main chart node has up to seven descriptors by default, and can be configured with up to 99 descriptors. A pop-up node has up to eight descriptors. Each descriptor can have an image associated with it and can be configured as a link. On the main chart, a descriptor can also be configured as an IM presence icon, a related actions menu, or a button that is associated with a drop-down list box. FieldChange PeopleCode associated with a descriptor can invoke a pop-up, change the display characteristics of the chart, and perform other processing logic.


Field or Control	Description
Drop-down	You can configure a descriptor as a link associated with a drop-down menu or a drop down list box. A drop-down can be linkable or read-only. If the drop-down is linkable, PeopleCode related to the descriptor executes when a user clicks a list item.
Header Level	Information that appears at the top of a pop-up. An organization chart is made up of boxes, representing nodes, at different levels. The position of a node in a chart is determined by its parent node (PTPARENT_CHART_ND) and display order (PTND_DISPLAY_ORDER).
Main chart	The primary chart in an organization chart showing individual entities, such as employees, in boxes related to one another hierarchically. A user can invoke PeopleCode that displays a pop-up node by clicking a link in a box, or node, of the main chart or by clicking a link in a pop-up node.
Node	A representation of a single entity, an individual instance of data, in an organization chart. A node is represented as a box with vertical lines connecting it to its parent node and to its child nodes, if any.
Node record	A derived/work record that contains the properties and data values for each node on the main chart. The node record is created using a clone of the PTORGNODE_SBR subrecord.
Parent node	A node that has one or more subordinate nodes, or child nodes, one level below it. Each node can be a parent for other nodes.
Pop-up	A new window that displays information specifically related to a node on the main chart or another pop-up. A pop-up can be invoked from a link on a main chart node or from a link on a pop-up node. FieldChange PeopleCode controls the appearance and content of a pop-up.
Pop-up node	A single instance of data on a pop-up. A pop-up can have one or more nodes, all related to one node of the main chart or one node of another pop-up.
Pop-up node record	A derived/work record that contains the properties and data values for each pop-up node on the main chart. The node record is created using a clone of the PTORGPOPUPNODE_SBR subrecord.
Related-actions menu	You can configure a descriptor as a related actions menu. A user can select a link from a cascading drop down menu that invokes a related action from the related content framework.

Using Organization Charts in the PeopleSoft Pure Internet Architecture


A PeopleSoft organization chart consists of two parts: the main hierarchical chart and pop-ups that enable the user to access additional related data for each node.

An organization chart can be oriented vertically or horizontally. Use the [Direction property: OrgChart class](#) to set the orientation of an organization chart.

The following example shows a vertically oriented organization chart:

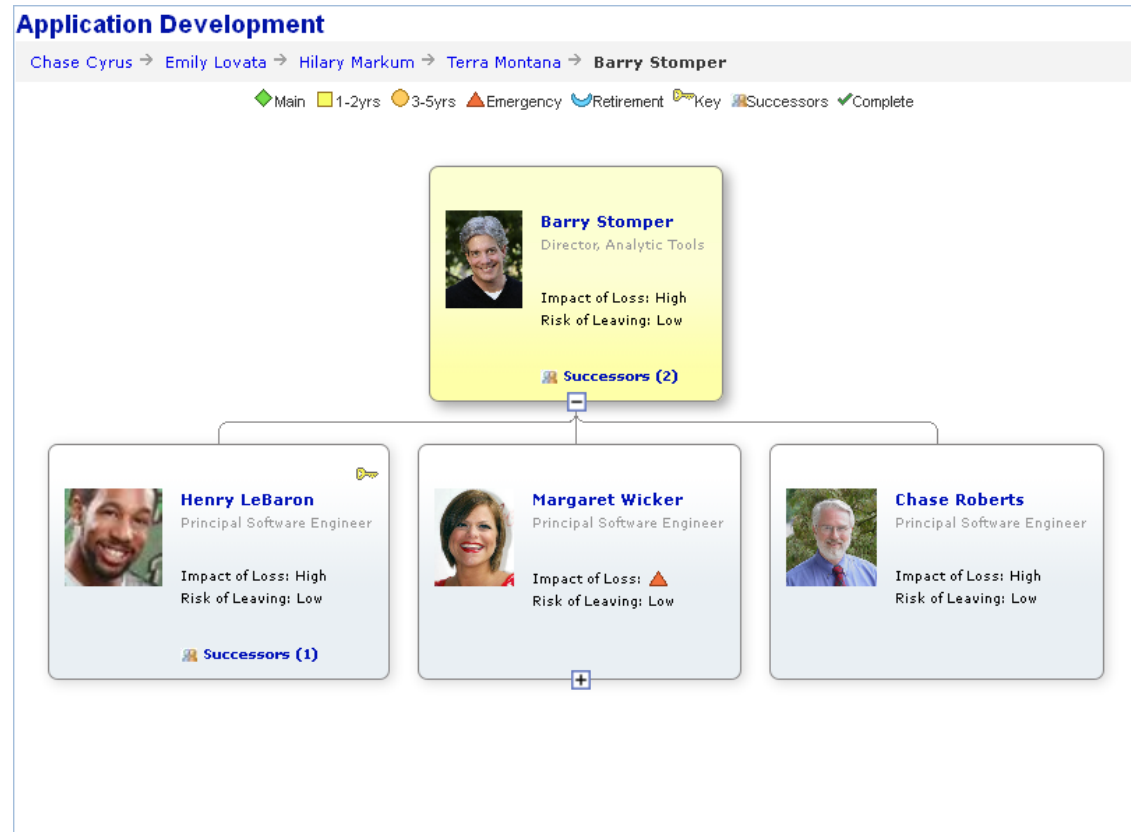

The following example shows a horizontally oriented organization chart:

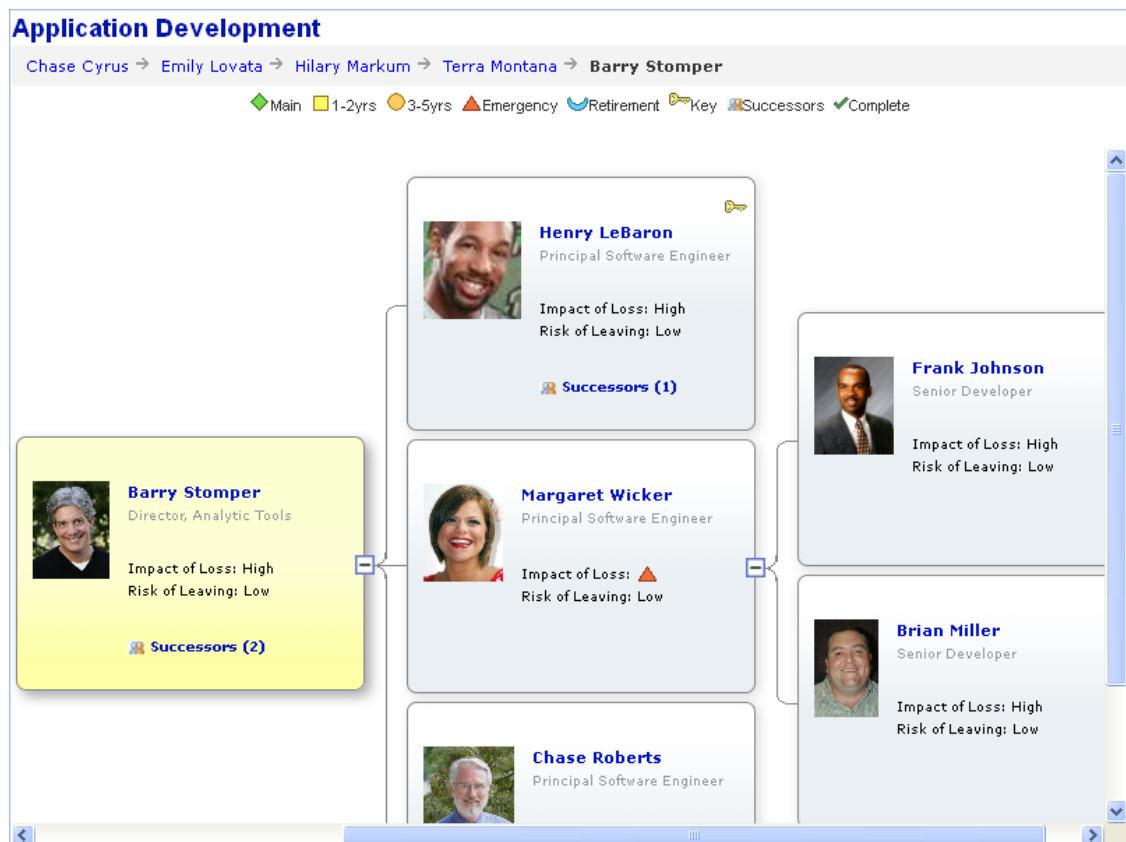

Main Chart

The main chart can have multiple levels. Each level consists of one or more nodes. Each node represents an individual entity, such as an employee, in the organization. A node has one parent node (except the top-level node, which does not have a parent node) and zero, one, or more child nodes. Each node in the main chart has up to 99 descriptors and each descriptor can be configured as a link or as a button associated with a drop-down list box. Application developers can associate FieldChange PeopleCode with each descriptor link or button associated with a linkable drop-down list box.

Pop-up Chart

A pop-up displays a pop-up chart with information specifically related to the node from which it was invoked. A connector line visually links the pop-up chart to the predecessor node, the node in the chart from which the pop-up was invoked.

If the pop-up contains more nodes than can be displayed (that is, if MaxPopupDisplayNode is set to a number that is less than the total number of nodes) then a scroll bar appears in the pop-up. In some circumstances when a pop-up has a scroll bar and has more than one level, when a user clicks a link on a level other than the top level the new pop-up may not appear in the display area. If this occurs, the user can scroll down using the scroll bar in the initial pop-up to view the new pop-up node.

Note

The amount of time it takes for a pop-up to appear is proportional to the number of nodes in the pop-up. A pop-up with hundreds of nodes may take a long time to appear. An hourglass appears to let the user know the system is working to retrieve the nodes.

A pop-up is invoked through PeopleCode associated with the FieldChange event for a descriptor link on a main chart node or another pop-up node.

A pop-up consists of a header and one or more nodes with each node having up to eight descriptors. Each descriptor can be configured as a link.

The user can drag-and-drop a pop-up node to reposition it but the new position will not be retained after any action that requires a server trip that reloads the chart.

Creating Organization Charts Using the OrgChart Class

When you add an organization chart to a page in Application Designer, you use the chart properties to associate the chart control with a chart record field. You will use this field name to identify the chart in PeopleCode.

You will need to create a record that will be the organization chart node record. The organization chart node record holds the values for the properties and data for each of the nodes of the main chart. If your chart uses pop-ups, you will also need a pop-up node record that holds the values for the properties and data for each of the pop-up nodes.

The organization chart node records must be in the component buffer at runtime. This means that you will have to place them on a page at level one in the component. You can hide them.

The maximum number of nodes you can create is limited according to browser, as shown in the following table:

Browser	Maximum Nodes
Google Chrome	600
Mozilla Firefox	1000
Apple Safari	600

The records can have any name, but they must include clones of the PeopleTools-delivered subrecords PTORGNODE_SBR and PTORGPOPUPNODE_SBR. Since the subrecords will carry the FieldChange PeopleCode for the chart, in most cases you should create unique subrecords for each chart.

Your PeopleCode will create and populate two rowsets. These must be component rowsets, linked to the node records of the chart, not standalone rowsets. The organization chart node rowset has one row for each node in the organization chart, and the pop-up node rowset has one row for each pop-up node.

You place FieldChange PeopleCode on the fields of the node records to invoke pop-up charts, update displayed data, process application logic, and refresh the chart.

Overview of Creating an Organization Chart

To create an organization chart you will develop an application that comprises these elements:

- A chart page control that displays the chart on a page.
You can place more than one chart control on a page. Each chart control must be associated with a different field.
If more than one pagelet with organization charts appear simultaneously, each chart must be associated with a unique chart record field.
- A chart data record, or organization chart node record, based on the PTORGNODE_SBR subrecord, that contains the data for the chart.
- A PeopleCode program, usually in the page Activate event, that instantiates the chart, links the chart to the chart control, defines the chart attributes, and populates the chart data rowset.
- FieldChange PeopleCode programs associated with the chart data record fields.

See [Organization Chart Actions and Events](#).

Depending on which organization chart features your chart implements, you may need to include these elements in your application:

- A pop-up chart data record, based on the PTORGPOPUPNODE_SBR subrecord.
- A breadcrumb record, based on the PTORGBRMB_SBR subrecord.
- Drop-down list records, based on the PTORGBOXLIST_SBR and PTORGBOXFLD_SBR subrecords.
- A node display record, based on the PTNODE_DISP_SBR subrecord.
- An IM data record, based on the PTORGIM_SBR subrecord.
- Additional PeopleCode to manage the corresponding record data and set attributes for the chart features.
- FieldChange PeopleCode programs associated with the corresponding record fields.

See [Organization Chart Actions and Events](#).

The chart data record and all of the records you use to implement organization chart features, such as the pop-up data record, drop down list records, node display record, must be in the component buffer at runtime.

If your application implements zooming, or schema levels, you will need to incorporate PeopleCode to manage the schema levels.

See [Implementing Zoom Schemas \(Optional\)](#).

Creating an Organization Chart

This section presents the steps to create a full-featured organization chart. Some aspects of an organization chart are optional, and not required. The following sections explain how to:


- Display breadcrumbs (optional).
- Define descriptors.
- Configure menus and drop-down lists (optional).
- Define drop down lists.
- Configure IM presence (optional).
- Design organization chart nodes.
- Implement zooming (optional).

- Configure connector lines and borders.

Displaying Breadcrumbs (Optional)

You can configure an organization chart to display breadcrumbs. Typically, breadcrumbs display the names of people in an organization hierarchy.

The following example shows an organization chart with breadcrumbs:

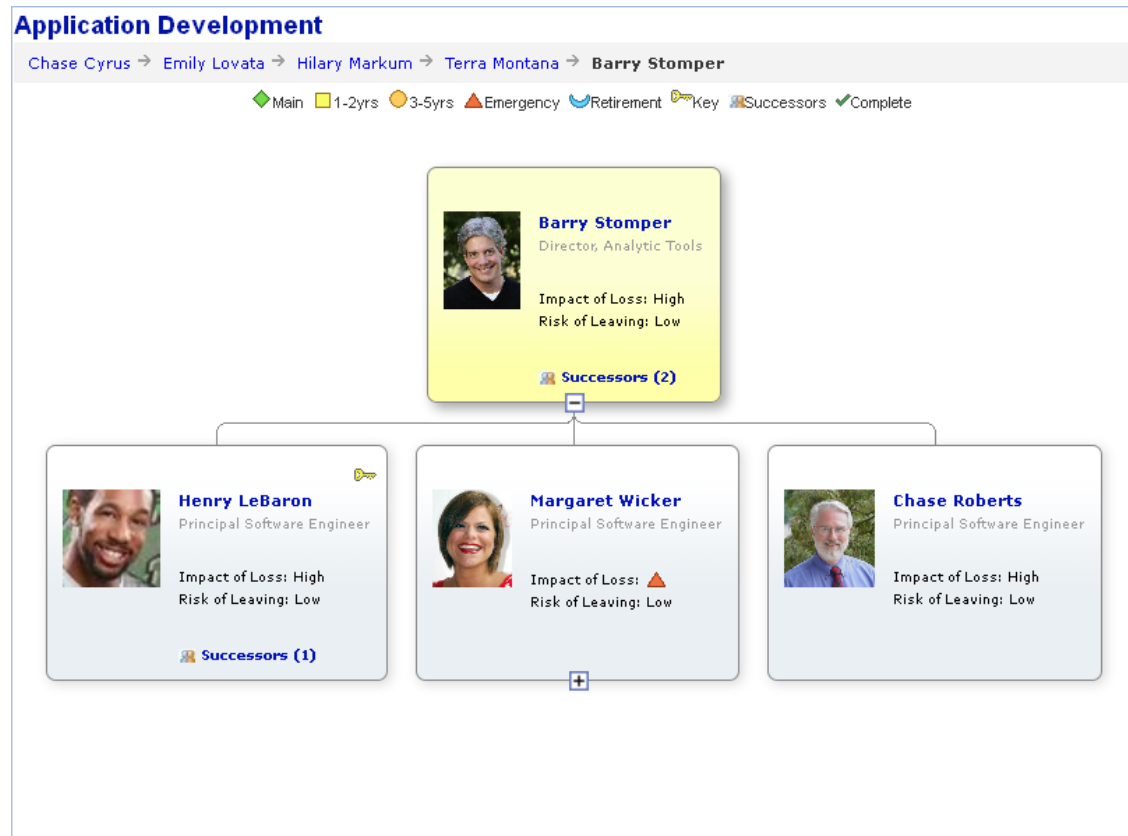

An organization chart can have only one set of breadcrumbs. The breadcrumbs appear horizontally at the top of an organization chart, above the chart legend if the legend is set. The breadcrumbs string wraps automatically if it is wider than the organization chart. If a breadcrumb contains a space, the breadcrumb string may wrap at the space, causing the breadcrumb to appear on two lines.

Style classes control the formatting of breadcrumbs. The default style classes are PT_ORGCHART_BRDCRM and PT_ORGCHART_UNLINK_BRDCRM. You can specify your own style classes using the CrumbDescrStyle and UnlinkCrumbDescrStyle properties.

You can specify an image to separate breadcrumb entries. If an image is not specified, the breadcrumbs are separated by three spaces. Each breadcrumb entry can be configured to be linkable. This configuration is similar to linkable text on organization chart nodes.

To implement breadcrumbs in an organization chart, you:

- Clone the breadcrumb subrecord PTORGCRMB_SBR.
- Add the clone of PTORGCRMB_SBR to a work record.

- Add the work record to a page such that it is available in the component buffer so that PeopleCode can be invoked from the record fields.

One way to accomplish this is to include the record in a level 1 grid on the same page as the organization chart, and hide the grid.

- To make a breadcrumb linkable, set the corresponding PTORGCRRMBLINKABLE field to “Y”, in much the same way as you make a descriptor linkable in an organization chart node.
- Add PeopleCode to provide application-specific processing when a linkable breadcrumb is selected.

When a user clicks a linkable breadcrumb, any FieldEdit and FieldChange PeopleCode in the PTORGCRRMBID field executes.

At runtime, your PeopleCode will add rows to the work record that holds the information for each breadcrumb (person).

Each breadcrumb in a chart is defined by a row in the record.

See [Organization Chart Subrecord Definitions](#), [CrumbDescrStyle property: OrgChart class](#).

Breadcrumb Methods and Properties

The following OrgChart class methods and properties control the appearance of breadcrumbs:

- SetCrumbData
- SetCrumbRecord
- UnlinkCrumbDescrStyle
- CrumbDescrStyle
- CrumbMaxDisplayLength
- CrumbSeparatorImage

Defining Descriptors

An organization chart node contains a set of descriptors. Each descriptor represents one element of data related to the node.

The descriptors for a node are defined in the organization chart node data record, which includes a clone of the PTORGNODE_SBR subrecord. The organization chart node record can define up to 99 descriptors. One row in the organization chart node record defines one node in the organization chart.

See “PTORGNODE_SBR” in [Organization Chart Subrecord Definitions](#).

These fields on the PTORGNODE_SBR define the descriptors for a node (where *n* is a number from 1 to 99; for example, PTNODE_DESCR1):

- PTNODE_DESCR n
- PTNDDDESC n LINKABLE
- PTDESCR n _ICON_IMG
- PTDESCR n _ICON_POS

PTORGNODE_SBR is delivered with fields for seven descriptors. If you are using a node display template and need additional descriptors, you will need to add sets of descriptor fields, to a maximum of 99 descriptors.

Use the PTNODE_DISPLAY_ID field to optionally designate a node display template, which defines other display characteristics for nodes.

See “Using Node Display Templates” in [Designing Organization Chart Nodes](#).

Descriptor Fields

The PTNODE_DESCR n field specifies the text for a descriptor, where n is a number from 1 to 99 (for example, PTNODE_DESCR1).

The PTNDDDESC n LINKABLE field specifies the descriptor type. A descriptor can be one of the following types:

- Y - Linkable text
- N - Static text
- A - Related action menu
- D - Linkable drop-down menu
- R - Read-only (non-linkable) drop-down menu
- L - Linkable drop-down list box
- I - Linkable Icon
- O - Icon only
- M - IM icon

When a user clicks a linkable descriptor, a linkable drop-down menu item, or a drop-down list box item, FieldChange PeopleCode associated with the PTNDDDESC n LINKABLE field executes.

See [Organization Chart Actions and Events](#).

When a user selects a related action menu item, the corresponding action executes. PeopleSoft Related Content Framework must be configured for related action menus.


If the descriptor includes an icon, specify the image name and position using the PTDESCR n _ICON_IMG and PTDESCR n _ICON_POS fields.

Suppose your application includes a node row with this data (some fields in the PTORGNODE_SBR subrecord are omitted for simplicity):

Field	Value
PTCHART_NODE	ADIAZ
PTPARENT_CHART_ND	TMONT
PTORGCHRTIMG	(BLOB)
PTNODE_DESCR1	Arron Diaz
PTNDDDESC1LINKABLE	Y
PTDESCR1_ICON_IMG	
PTDESCR1_ICON_POS	
PTNODE_DESCR2	Director, Upgrade
PTNDDDESC2LINKABLE	
PTDESCR2_ICON_IMG	STATUS_COMP_ICN
PTDESCR2_ICON_POS	L
PTNODE_DESCR3	Experience: Low

Field	Value
PTNDESC3LINKABLE	Y
PTDESCR3_ICON_IMG	EXP_ICN
PTDESCR3_ICON_POS	R

The following example shows the node that is created using the previous attributes:

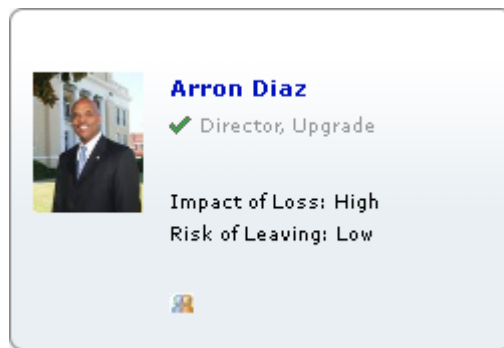

Drop-down lists require additional configuration.

See [Designing Organization Chart Nodes](#).

See [Configuring Drop-Downs](#).

Using Images with Organization Charts

If your organization chart uses images, such as photographs, then the scroll area or grid with the fields that contain the images must have unlimited occurs count enabled. That is, the Unlimited Occurs Count check box must be selected on any scroll area or grid that includes a record with the fields from PTORGNODE_SBR or PTORGPOPUPNODE_SBR, but only when images are used.

See [Implementing Menus and Drop-Down Lists \(Optional\)](#).

Implementing Menus and Drop-Down Lists (Optional)

You can configure an organization chart to include menus and drop-down lists for any of the node descriptors.

Understanding Menus and Drop-Down Lists

This section discusses the following types of drop-downs:

- Related action menu.
- Drop-down menu.
- Drop-down list box.

Related Action Menu

A related action menu is dynamically generated based on a related service configuration that has been defined in the PeopleSoft Related Content Framework. Related action links in the menu take the user directly to the target, using related values supplied by the node. Because

the menu structure and links are defined by the related service configuration, the developer does not need to populate the drop-down rowset or to write PeopleCode for related action drop-down menus. You do need to verify that the related action services mapping page fields are included in the node record.

The following example shows a node configured with a related action menu.



Drop-Down Menu

A drop-down menu presents list items in a folder menu structure.

Drop-down menus can contain folders and menu items. Folders can be nested.

A drop-down menu can be linkable or read-only. If the drop-down menu is linkable, FieldChange PeopleCode associated with the descriptor field PTNDDESCnLINKABLE executes when a user clicks on a menu item. If the drop-down menu is read-only, FieldChange PeopleCode does not execute.


The following example shows a node configured with a drop-down menu.



Drop-Down List Box

A drop-down list box presents a list of linkable items.

The following example shows a node with a drop-down list box.

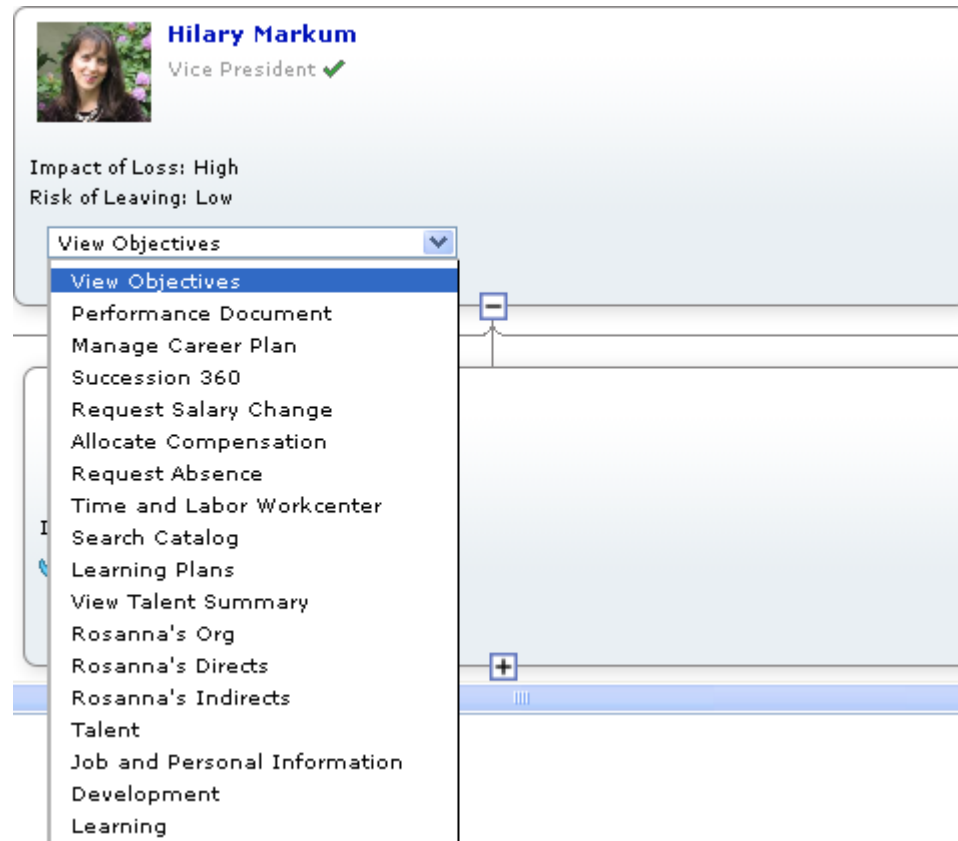

The width of a drop-down list box is the width of the widest list item that the box contains.

Configuring Related Action Menus

A related action menu is dynamically rendered based on related content configuration that is mapped to the level 1 chart node record field PTCHART_NODE on the chart page. The services that make up the related content configuration are rendered as links on the related actions menu. The related content layout defines the hierarchical structure of the related actions menu. A related content menu consists of folders and menu items. Folders can be nested.

! Important

SmartNavigation has been desupported. This information remains for backward compatibility only.

An Actions folder can also be configured to display in drop-down SmartNavigation menus (that is, the portal breadcrumb menu). The Actions folder displays depending on the configuration of related actions for SmartNavigation. If the related actions are attached at the chart component level, the Actions folder will not appear in the drop down menu. If the related actions are attached to the data source's detail component, the Actions folder will appear in the drop down menu.

Related content services are defined using the Define Related Content Service component. Then, related actions are assigned using the Manage Related Content Service component. Both components are part of the PeopleSoft Related Content Framework.

See Portal Technology: Creating and Managing Related Content Service Definitions and Portal Technology: Configuring Related Content, Related Actions, and Menu and Frame Layouts.

To configure a descriptor as a related action menu, set the corresponding PTNDDDESC n LINKABLE value to "A". Using the Manage Related Content Service component, associate the related actions as *page level* related content to the chart node record field PTCHART_NODE on the chart page at level 1.

Configuring the Node Record for Drop-Downs

For each drop-down, add the fields PTDESCR n _DD_ID and PTDESCR n _SI_ID to your node data record, where n represents the number of the descriptor. For example, to configure PTNODE_DESCR7 as a drop-down, add the fields PTDESCR7_DD_ID and PTDESCR7_SI_ID. Add one set of PTDESCR n _DD_ID and PTDESCR n _SI_ID for each descriptor you configure as a drop-down (PTNDDDESC n LINKABLE="D", "R", or "L").

You will populate PTDESCR n _DD_ID with a unique identifier for the drop-down.

When the user clicks on a list item in the drop-down, the system sets the PTDESCR n _SI_ID field to the value of the list item ID, making it available for use by FieldChange PeopleCode.

Configuring the Node Record Without a Display Template

Oracle recommends using a display template to configure your organization chart. Organization charts created with PeopleTools version 8.51 do not use display templates. If your organization chart does not use a display template, you need to configure the node record differently.

Add the fields in the PTORGBOXFLD_SBR subrecord to your node record. The subrecord contains the fields PTDESCR n _DROPDOWN_ID and PTDES n _SLCT_ITM_ID, where n is an integer from 1 to 7, for example PTDESCR1_DROPDOWN_ID and PTDES1_SLCT_ITM_ID, and so on.

You will populate PTDESCR n _DROPDOWN_ID with a unique identifier for the drop-down.

See "PTORGBOXFLD_SBR" in [Organization Chart Subrecord Definitions](#).

Configuring Drop-Downs

To configure a descriptor as a drop-down menu or drop-down list box:

1. Set the PTNDESCRnLINKABLE field to "D" for a linkable drop-down menu.
Set the field to "R" for a read-only (non-linkable) drop-down menu.
Set the field to "L" for a linkable drop-down list box.
2. Populate the PTDESCRn_DD_ID field (or the PTDESCRn_DROPDOWN_ID if your chart does not use a display template) with the drop-down ID.
3. Create a derived/work record that contains the fields in the subrecord PTORGBOXLST_SBR.
4. Add PeopleCode to set the drop-down data record and the drop-down rowset.
For example:

```
&ocPB0rg.SetDropDownRecord(Record.DropDown);  
&ocPB0rg.SetDropDownData(&rsDropDown);
```
5. Populate the drop-down data rowset with the list information for each of the drop-down list IDs.
See [Populating the Drop-Down Rowset](#).
6. Place FieldChange PeopleCode on the PTNODE_DESCRn field to perform corresponding logic when a list item is selected in a linkable drop-down.

Related Topics

- [Organization Chart Subrecord Definitions](#)
This section describes the following organization chart subrecord definitions:
- [SetDropDownRecord method: OrgChart class](#)
- [SetDropDownData method: OrgChart class](#)

Populating the Drop-Down Rowset

The drop-down rowset defines the content for drop-down list boxes and defines the menu structure as well as the content for drop-down menus.

Populate the drop-down ID field (PTDESCRn_DD_ID using a display template, or PTDESCRn_DROPDOWN_ID if not using a display template) on the node record with a unique identifier, such as EMPL.

Populate the drop-down data rowset according to these rules:

- Each list item in the menu is either a folder or a menu item.
Assign a unique value in PTORGDRPLSTITM_ID for each item.
- Populate PTNODE LISTDESCR with a label for each item.
- Folders have children.
- Menu items have no children.
- Determine the parent for each item. This is the group ID.
Set PTORGDRPLS_GRP_ID to the parent ID, PTORG DRPLSTITM_ID.
- Top-level list items have no parent. Set the group ID to blank.
- Drop-down list box items have no parent. Set the group ID to blank.
- Determine the display order of each list item within its group.

For example, suppose you want to create a drop-down menu with the following structure:

Level 1	Level 2	Level 3
Talent	Teamwork	
	Planning	
Compensation	Objectives	Objective A
		Objective B
	Performance	Self Appraisal
		Peer Appraisal
Time		
Absence		

For this example, the drop-down data rowset contains these rows:

PTDESCR_ DRP DWN_ID	PTORG DRPLST ITM_ID	PTORG DRPLS_ GRP_ID	PTND_ DISPLAY_ ORDER	PTNODE LISTDESCR
EMPL	TALENT		1	Talent
EMPL	COMP		2	Competency
EMPL	TIME		3	Time
EMPL	ABS		4	Absence
EMPL	TEAM	TALENT	1	Teamwork
EMPL	PLAN	TALENT	2	Planning
EMPL	OBJ	COMP	1	Objectives
EMPL	PERF	COMP	2	Performance
EMPL	OBJA	OBJ	1	Objective A
EMPL	OBJB	OBJ	2	Objective B
EMPL	SELF	PERF	1	Self Appraisal
EMPL	PEER	PERF	2	Peer Appraisal

Setting Drop-Down Styles

Set the style sheet for the drop down descriptor using the PT_CNT_STYLE field on the node display record.

The default style sheet for the drop down depends on the display type of the descriptor.

The following list shows the default style sheet for each drop down type:

- A – PT_ORGNODE_DESC7
- D - PT_ORGNODE_DESC7
- R - PT_ORGNODE_DESC7
- L – PT_ORG_DDLIST

The style class for the drop down list item is set using the PTORGLISTDESCSTYLE field in the drop down record. If no style is specified, the default style class is used.

The default style sheet for the drop down list item is:

- A - PT_ACTION_LIST_ITEM
- D - PT_ACTION_LIST_ITEM
- R - PT_READONLY_LIST_ITEM

Designing Organization Chart Nodes

This section describes the basic design of an organization chart node and explains how to use node display templates to configure more complex organization chart nodes.

Using Node Display Templates

You can optionally define node display templates for more precise control over the display characteristics of descriptors on a node.

A node display template is keyed to a single organization chart node row, using the PTNODE_DISPLAY_ID field. A node display template comprises the set of rows that share a value in PTNODE_DISPLAY_ID. Conversely, an organization chart node is associated with a single node display template.

Each row in the node display template defines one descriptor.

Using a node display template, you control:

- Which descriptors appear on the node. Only descriptors included in the node display template and that have PT_DISPLAY_FLAG set to "Y" will appear in the node.
- Display type of descriptors (this overrides display types set in PTNDDDESCnLINKABLE).
- Line position and display order of a descriptor.
- Number of display items on a node line.
- Spacing between descriptors.

You can associate a node display template with one or more schemas, or zoom levels. Each schema level assigns different display characteristics to the descriptors.

See [Implementing Zoom Schemas \(Optional\)](#).

You can define your chart to use different node display templates for different nodes by assigning different values to PTNODE_DISPLAY_ID. For example, you might choose to configure the nodes for executive management to display names and photos, but no telephone numbers, locations, emails, or IM presence, while nodes for everyone else display telephone numbers, locations, and emails, but not photos.

Implementing Node Display Templates

To implement node display templates:

1. Create a node display record that includes a clone of the PTNODE_DISP_SBR.
2. Add PeopleCode to set the node display record and the node display rowset.
3. For example:

```
&ocPB0rg.SetNodeDisplayDataRecord(Record.&recDisplay);  
&ocPB0rg.SetNodeDisplayData(&rsDisplay);
```

See "PTNODE_DISP_SBR" in [Organization Chart Subrecord Definitions](#).

See [SetNodeDisplayDataRecord method: OrgChart class](#).

See [SetNodeDisplayData method: OrgChart class](#).

Example: Designing a Node

This section demonstrates how to lay out a node that looks like the following example:



Node Descriptors

The organization chart node (PTORGNODE_SBR) sample data in the following table generates the descriptors in the previous node example (for simplicity, not all fields are shown):

Field	Data
PTCHART_NODE	CROBE
PTPARENT_CHART_ND	BSTOM
PTND_DISPLAY_ORDER	3
PTNODE_DESCR1	Chase Roberts
PTNDDESC1LINKABLE	Y
PTNODE_DESCR2	Sr. Manager
PTNODE_DESCR3	My Teams
PTNDDESC3LINKABLE	D
PTNODE_DESCR4	KU0035
PTNODE_DESCR5	2/8/1998
PTDESCR5_ICON_POS	L
PTNODE_DESCR6	\$125,000
PTNDDESC6LINKABLE	N
PTNODE_DESCR7	Actions
PTNDDESC7LINKABLE	A
PTDESCR7_ICON_POS	L
PTADJUSTFORNULLS	Y
PTNODE_DISPLAY_ID	DEMO17
PTPHOTO_START	2
PTNODE_DESCR8	Org Chart

Field	Data
PTDESCR8_ICON_IMG	QE_ORG_CHART_ICON
PTDESCR8_ICON_POS	L
PTNDDESC8LINKABLE	Y
PTNODE_DESCR9	Person ID:
PTNODE_DESCR10	Hire Date:
PTNODE_DESCR11	Comp Rate:
PTNODE_DESCR12	
PTNDDESC12LINKABLE	
PTNODE_DESCR13	Org chart
PTDESCR13_ICON_IMG	QE_SUCCSORGCHART
PTDESCR3_DD_ID	DEMO17B
PTDESCR7_DD_ID	DEMO17

Node Display Template

The organization chart node display (PTNODE_DISP_SBR) data looks like this:

PTNODE _DISPLA Y_ID	PT_SCH EMA_LE VEL_ID	PT_CNT_ ID	PT_NOD E_VIEW	PT_LINE _NUM	PTND_ DISPLAY _ORDER	PT_DISP LAY_TYP E	PT_PAD DING_ LEFT	PT_ PADDIN G_ RIGHT
DEMO17	3	PTNODE_ DESCR12	VIEW1	1	1	M	Y	0
DEMO17	3	PTNODE_ DESCR13	VIEW1	1	2	I	Y	0
DEMO17	3	PTNODE_ DESCR1	VIEW1	2	1	Y	Y	0
DEMO17	3	PTNODE_ DESCR2	VIEW1	3	1	N	Y	0
DEMO17	3	PTNODE_ DESCR8	VIEW1	4	1	Y	Y	0
DEMO17	3	PTNODE_ DESCR9	VIEW1	5	1	N	Y	0
DEMO17	3	PTNODE_ DESCR4	VIEW1	5	2	N	Y	0
DEMO17	3	PTNODE_ DESCR10	VIEW1	6	1	N	Y	0
DEMO17	3	PTNODE_ DESCR5	VIEW1	6	2	N	Y	0
DEMO17	3	PTNODE_ DESCR11	VIEW1	7	1	N	Y	0
DEMO17	3	PTNODE_ DESCR6	VIEW1	7	2	N	Y	0
DEMO17	3	PTNODE_ DESCR3	VIEW1	8	2	D	Y	0

PTNODE _DISPLA Y_ID	PT_SCH EMA_LE VEL_ID	PT_CNT_ ID	PT_NOD E_VIEW	PT_LINE _NUM	PTND_ DISPLAY _ORDER	PT_DISP LAY_TYP E	PT_PAD DING_ LEFT	PT_ PADDIN G_ RIGHT
DEMO17	3	PTNODE_ DESCR7	VIEW1	8	1	A	Y	0

Default Node Design

Node display templates are a feature of PeopleTools Release 8.52. Organization charts created prior to PeopleTools Release 8.52 continue to be supported using the default node design.

Oracle recommends using node display templates for PeopleTools Release 8.52 and later organization charts. If you choose not to implement the optional node display templates, your organization chart will follow the default node design. An organization chart that is defined using the default node design has the following characteristics:

- If an icon image is specified in the PTNDMAINICON_IMAGE field, it appears on the first line, at the right.
- If a node image, such as a photo, is specified (PTORGCHRTIMG), it appears by default on the left, beginning on line two. You can use the ImageLocation property to specify left or right position.
- Each descriptor appears on a separate line. The node displays the first seven descriptors, ordered by the descriptor number.
- PTDESCR_UNDER_IMG specifies the first line that appears under the image. Previous lines appear beside the image.

Adjusting Node Sizing

By default, organization chart nodes are sized dynamically based on the contents of the node and can vary from node to node.


For a vertical organization chart, the width of each node is based on the width of the data in the node. Width can vary from node to node. All the nodes in a given row are the same height, based on height of the tallest node, but node height can vary from row to row.

For a horizontal organization chart, the height of each node is based on the height of the data in the node. Height can vary from node to node. All the nodes in a given column are the same width, based on width of the widest node, but node width can vary from column to column.

You can use the NodeProportion property to control how nodes are sized on a chart. NodeProportion takes the following values:

- 0 = Variable node sizing. (Default.)
- 1 = Uniform node height.
- 2 = Uniform node width.
- 3 = Uniform node height and width.
- 4 = Square nodes.

The following example shows a vertical organization chart with uniform node height and width (NodeProportion = 3):

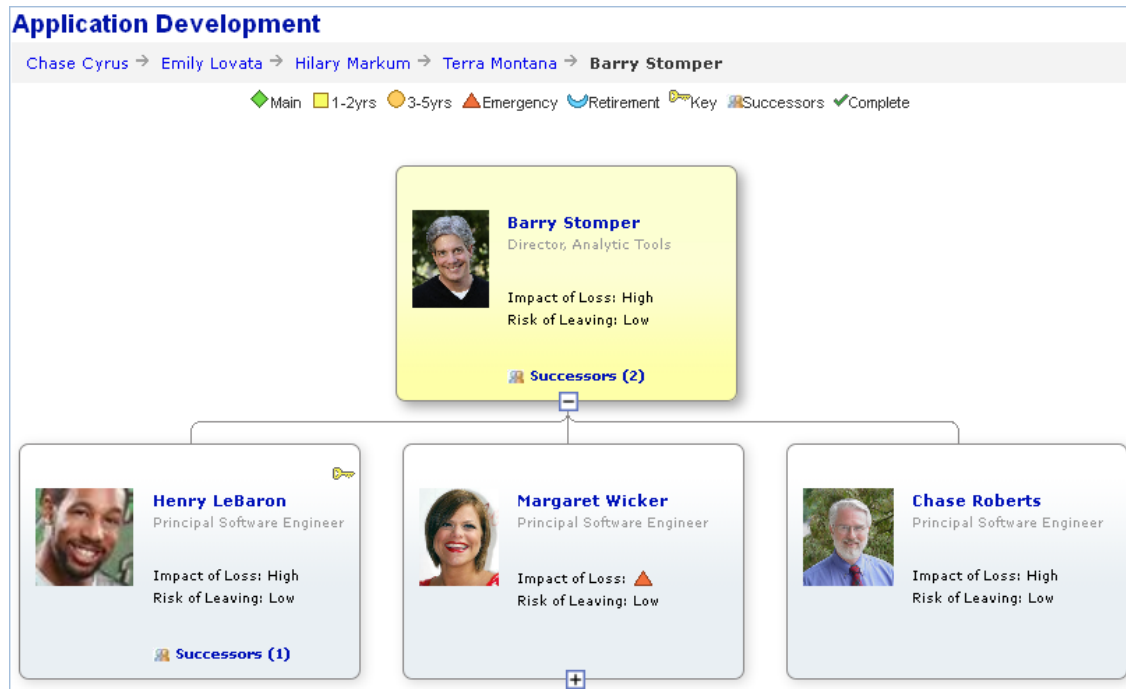

Applying constant node widths can create nodes with extra blank space in the node. You can reduce the node width by reducing value of the `NodeMaxDisplayDescLength` property.

See [NodeProportion property: OrgChart class](#).

See [NodeMaxDisplayDescLength property: OrgChart class](#).

Implementing Node Views (Optional)

Node views allow you to display alternate information on a node. Using node views, you can determine which attributes to show in the node based on the organization chart's node display template. For instance, one node view might show a person's name, photo, and job information, while another view might show that person's name and contact information.

Users are able to select different node views of the organization chart to see less or more data in the nodes. When node views are implemented for an organization chart, the chart displays a view controller that enables a user to select a node view.


You can define multiple node views for an organization chart. A node view definition would include a full definition of the node contents defined by the following attributes:

- Which icons are displayed.
- Which descriptors are displayed.
- The style of the node descriptor.
- The position of the descriptors on the node.

Node View Controller

The node view controller appears in the top part of the chart above the nodes but below any chart breadcrumbs or legend. The node view controller is made up of push buttons without text where each button represents a view. A data hint is used to provide the text description of the view.

The node view controller in this example displays the “Personal” node view data hint:

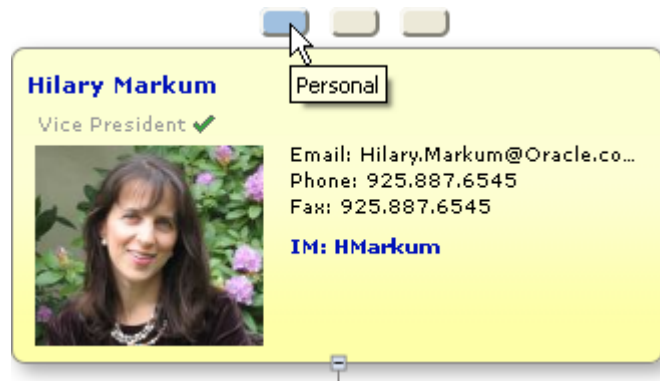

Creating Node Views

To set up the node view controller to enable node views, use the following two organization chart methods:

```
&oOrgChart.SetNodeViewEntries(&NodeViewArray);
&oOrgChart.SetNodeViewText(&NodeViewText);
```


NodeViewArray represents an array of node view IDs. NodeViewText is an array of data hints for each corresponding node view ID.

Additionally, the organization chart property, InitialView, must be set to indicate which view is initially displayed in the chart. For example, the property might be set as follows to show the view that is labeled “Personal.”

```
&oOrgChart.InitialView="VIEW1";
```

The following example shows an organization chart with three node views defined:

Node Views

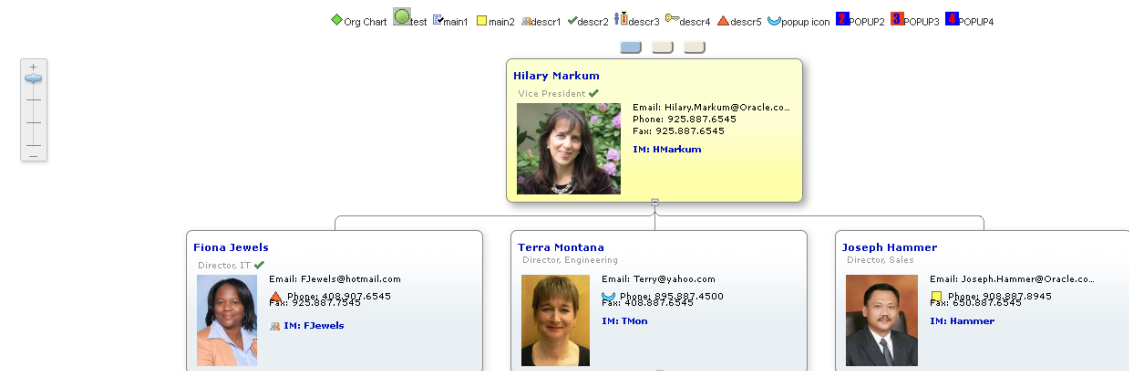

Transitioning between node views will be done without a server trip. Therefore, it's not possible to have a field change event when changing between views. Also, once the user navigates away from the chart or the chart is refreshed, the current view state is not saved. Therefore, the chart will always show the initial view set in the chart property whenever the chart is viewed again.

Related Topics

- [Designing Organization Chart Nodes](#)
This section describes the basic design of an organization chart node and explains how to use node display templates to configure more complex organization chart nodes.
- [SetNodeViewEntries method: OrgChart class](#)
- [SetNodeViewText method: OrgChart class](#)
- [InitialView property: OrgChart class](#)

Implementing Zoom Schemas (Optional)

Zoom schemas enable you to define different visual schemas for organization charts.

Although schemas are designed to give the appearance of zooming in or out on the organization chart, in fact they are predefined views of the organization chart at different levels. Using schemas, you define what attributes to show on the node, and which nodes are displayed in each schema level. Users are able to select different views of the organization chart to see more or fewer nodes, and to see less or more data in the nodes.


You can define up to ten schema levels for an organization chart.

When zoom schemas are implemented for an organization chart, the chart displays a zoom control that enables a user to select a schema level.

The following example shows an organization chart with a zoom control and four schemas defined. The chart in this example displays schema level 3.

Application Development

Chase Cyrus → Emily Lovata → Hilary Markum → Terra Montana → Barry Stomper

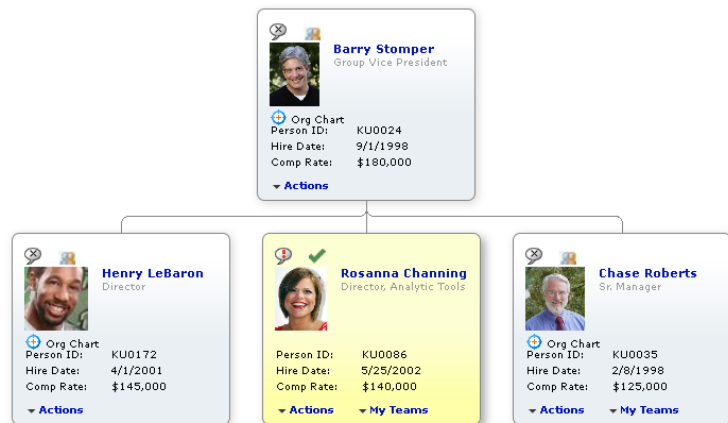

The chart in the following example displays schema level 1, which displays less data on each node, allowing the chart to display more nodes in the same area.

Application Development

Chase Cyrus → Emily Lovata → Hilary Markum → Terra Montana → Barry Stomper



Each schema level defines the following attributes, based on the organization chart's node display template:

- Which icons are displayed.
- Which descriptors are displayed.
- The style of the node descriptor.
- The position of the descriptors on the node.

See “Using Node Display Templates” in [Designing Organization Chart Nodes](#).

In addition, you can place FieldChange PeopleCode on the PTCHART_SCHEMA_ID field of the node record to control which nodes are displayed.

When the user changes schema levels, FieldChange PeopleCode on the PTCHART_SCHEMA_ID field of the node record executes. You can set the DISPLAYED_FLAG field on the node data rowset to control whether a node is displayed at the new schema level, or you can use PeopleCode to populate the organization chart node data rowset with only the nodes you want available at the new schema level.

Use the SchemaLevel object ImageHeight property to define whether the image (photo) is displayed in the node and the height of the image.

The size of the chart nodes is determined dynamically based on the subset of data within the node and the corresponding style properties for the schema level.

SchemaLevel Class

The SchemaLevel PeopleCode class provides methods and properties to set organization chart display information for each schema level.

SchemaLevel objects are declared using the SchemaLevel data type.

For example:

```
Local SchemaLevel &SchemaLevel1;
Component Chart &Abs_Hist_Chart;
```

Instantiate SchemaLevel objects using the CreateObject(“SchemaLevel”) PeopleCode function.

Implementing Schema Zooming

To implement schema zooming:

1. Add PeopleCode to specify the initial schema level.

Example:

```
&oOrgChart.ChartCurrentSchemaLevel=4;
```

2. Instantiate a SchemaLevel object for each schema level your chart will use.

Example:

```
SchemaLevel &oSchemaLevel1 = Createobject("SchemaLevel");
```

3. Add PeopleCode to define each schema level.

Example:

```
/**/ Create an instance of of schema zoom level 1 class and instantiate it
***/
SchemaLevel &oSchemaLevel1 =Createobject("SchemaLevel");
&oSchemaLevel1.ID=1;
& oSchemaLevel1.ImageHeight=0;
/**/ Create an instance of of schema zoom level 2 class and instantiate
it ***/
SchemaLevel &oSchemaLevel2 =Createobject("SchemaLevel");
&oSchemaLevel2.ID=2;
& oSchemaLevel2.ImageHeight=40;
/**/ Create an instance of of schema zoom level 3 class and instantiate it
***/
SchemaLevel &oSchemaLevel3 =Createobject("SchemaLevel");
& oSchemaLevel3.ID=3;
& oSchemaLevel3.ImageHeight=45;

/**/ Create an instance of of schema zoom level 4 class and instantiate
it ***/
SchemaLevel &oSchemaLevel4 =Createobject("SchemaLevel");
&oSchemaLevel4.ID=4;
& oSchemaLevel4.ImageHeight=50;
```

4. Assign the SchemaLevel instances to the OrgChart object.

Example:

```
/**/ Assign the 4 schema level instance to the org chart object ***/
&SchemaLevls=CreateArray(&oSchemaLevel1, &oSchemaLevel2, &oSchemaLevel3,
&oSchemaLevel4)
&oOrgChart.SetZoomSchemaLevels(&SchemaLevls)
```

5. Write FieldChange PeopleCode on the PTCHART_SCHEMA_ID field to execute when the user clicks on the schema zoom control to change the schema level.

Example:

```

Component Rowset &rs, &rsGrid;
Component object &oOrgChart;
rem WinMessage("value =" | &oOrgChart.ChartCurrentSchemaLevel);
&currentZoom = &oOrgChart.ChartCurrentSchemaLevel;
If &currentZoom = 1 Then
    /* display all records and no image */
    For &i = 1 To &rsGrid.ActiveRowCount
        &RecGrid = &rsGrid.GetRow(&i).GetRecord(Record.QE_ORG_Z2_DRV);
        &RecGrid.GetField(Field.PTDESCR_UNDER_IMG).value = 0;
        /* show all records */
        &RecGrid.GetField(Field.DISPLAYED_FLAG).value = "Y"
    End-For;
Else
    If &currentZoom = 2 Then
        &limit = 6;
    Else
        If &currentZoom = 3 Then
            &limit = 4;
        Else
            &limit = 3;
        End-If;
    End-If;
    For &i = 1 To &rsGrid.ActiveRowCount
        &RecGrid = &rsGrid.GetRow(&i).GetRecord(Record.QE_ORG_Z2_DRV);
        &RecGrid.GetField(Field.PTDESCR_UNDER_IMG).value = 3;
        If &RecGrid.GetField(Field.QE_ORG_SCHEMA_ROW).value < &limit Then
            &RecGrid.GetField(Field.DISPLAYED_FLAG).value = "Y";
        Else
            &RecGrid.GetField(Field.DISPLAYED_FLAG).value = "N";
        End-If;
    End-For;
End-If;

```

Schema Events

When a user selects a different schema level using the zoom control, the following events take place:

- The system sets the value in the CurrentSchemaLevel property to the new schema value.
- The systems sets the value in the PTCHART_SCHEMA_ID to the new schema value.
- FieldChange PeopleCode on the PTCHART_SCHEMA_ID field executes.
- The system displays the organization chart at the new schema level.

You can also set the CurrentSchemaLevel property using PeopleCode.


Related Topics

- [SetSchemaLevels method: OrgChart class](#)
- [ChartCurrentSchemaLevel property: OrgChart class](#)
- [ID property: SchemaLevel class](#)
- [ImageHeight property: SchemaLevel class](#)

Specifying Scroll Types

If an organization chart is larger than the viewable area, the user needs to scroll to view other areas of the chart. You can specify whether the organization chart will use scroll bars or alternative scrolling.

If you specify alternative scrolling, a scroll navigator and a hand cursor appear instead of vertical and horizontal scroll bars.

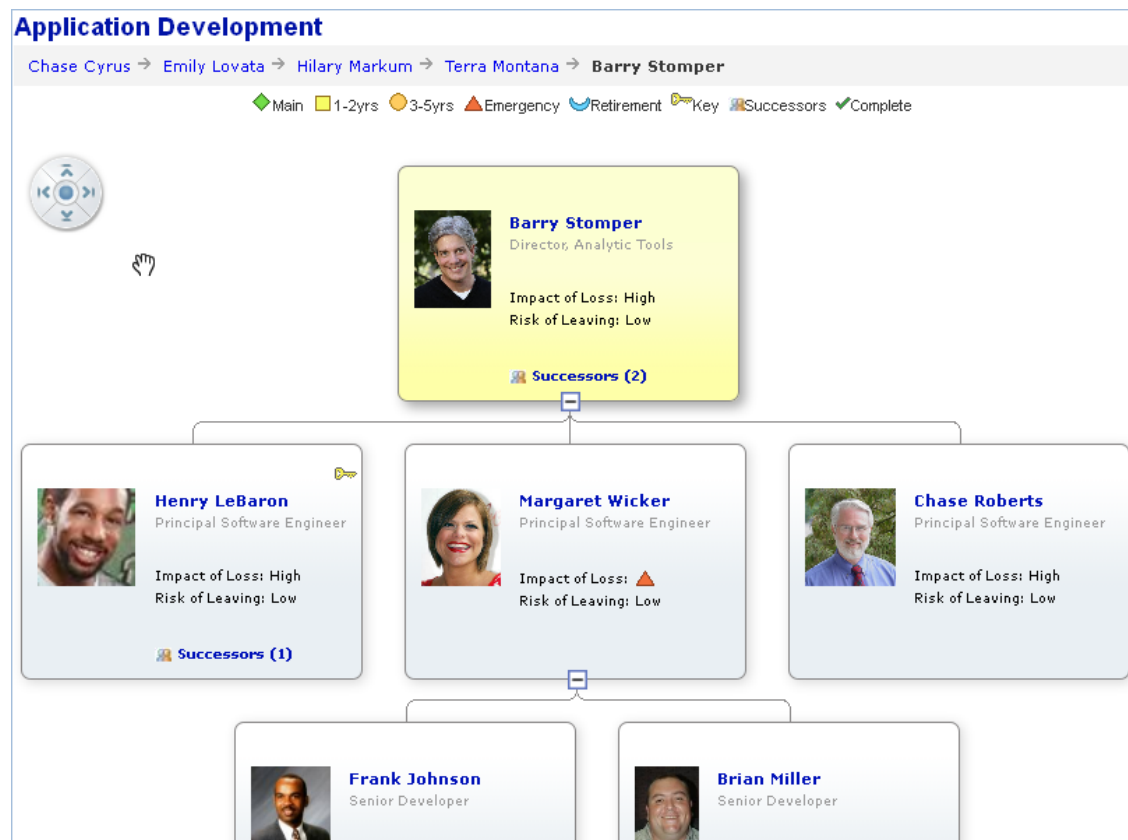

Note

On an Apple iPad a user navigates using two fingers on a touch screen, so scroll bars, the scroll navigator, and mouse hand features are not displayed on an Apple iPad.

The arrows on the scroll navigator enable the user to quickly position the right, left, top, or bottom of the chart in the viewable area.

If the user scrolls the chart, the center button of the scroll navigator returns the chart to its initial display position. If the user changes focus by selecting a different node, the chart centers on that node. The center button then returns the chart to display centered on the focus node.

If alternative scrolling is implemented, the user can dismiss a drop-down menu only by clicking within the node areas in the chart unless no scrolling is needed, in which case the user can click on the background or on a node to dismiss the menu.

Note

If the breadcrumbs and chart legend are so large that there is not sufficient room to display the scroll navigator in the upper left portion of the chart, it will appear in the lower left corner.

The hand cursor enables the user to grab the background of the chart and move it within the viewable area.

Note

When using the hand cursor to scroll, you must position the hand cursor in the chart area outside the chart nodes and popup nodes. Scrolling does not work if the hand cursor is positioned within a chart node or pop-up node.

Use the [ChartScrollType property: OrgChart class](#) property to specify which type of scrolling to use. The default is scroll bars.

Configuring Connector Lines and Node Borders

Use the PTCONNECTLINESTYLE field on the organization chart node record to specify the style sheet that defines the following characteristics of the connector lines:

- Line style (unbroken, broken, pattern)
- Line weight
- Line color

The PSORGCHART style sheet includes these style classes for connector lines:

Style Class	Connector Style
PT_ORGCHART_CONNECT1	Solid gray
PT_ORGCHART_CONNECT2	Solid black
PT_ORGCHART_CONNECT3	Dotted red
PT_ORGCHART_CONNECT4	Dashed gray

The default connector line style class is PT_ORGCHART_CONNECT1 (solid gray).

Use the PTNODESTYLENAME field on the organization chart node record to specify the style sheet that defines the following characteristics of the node border:

- Line style (unbroken, broken, pattern)
- Line weight
- Line color
- Shading
- Shading color

The PSORGCHART style sheet includes these style classes for connector lines:

Style Class	Connector Style
PT_ORGNODE	Solid gray
PT_PT_ORGNODE_DASH	Dashed gray

The default node border style class is PT_ORGNODE.

Note

We recommend using the default line weight, 1 pixel, for connector lines and node borders. Thicker line weights may cause inconsistencies between connector lines and node borders.

Organization Chart Actions and Events

An organization chart can execute FieldEdit or FieldChange PeopleCode in response to these user actions:

- Select an expand/collapse icon.
- Click a descriptor link.
- Select a linkable drop-down menu item or drop-down list box item.
- Close a pop-up node.
- Select a breadcrumb.
- Click on a node image.
- Click on a node.

Selecting Expand/Collapse Icons

When the user clicks an expand/collapse icon, the system toggles the EXPANDED_FLAG field value from "Y" to "N" or from "N" to "Y" and changes the icon on the node to collapsed or expanded, correspondingly. This action triggers field change processing (FieldEdit and FieldChange events) on EXPANDED_FLAG. Typically, FieldChange PeopleCode checks the EXPANDED_FLAG and PARENT_FLAG of the node and performs these actions:

- If EXPANDED_FLAG="Y" and PARENT_FLAG="X", loads the child rows into the rowset and sets PARENT_FLAG="Y". The updates appear when the chart is refreshed.
- If EXPANDED_FLAG="N" (collapse action), it does nothing.
- If EXPANDED_FLAG="Y" (expand action) and PARENT_FLAG="Y" (child data is already in rowset), it does nothing.

Note

If your PeopleCode doesn't populate the CollapsedImage and ExpandedImage properties of the organization chart, then no expand/collapse icon appears on any nodes in the chart, and the expand/collapse action is disabled for the chart.

Clicking a Descriptor Link

When the user clicks a descriptor link or linkable drop-down list item, field change processing is triggered on the PTNODE_DESCR n field in the node record.

For instance, suppose descriptor 2 is linked to a pop-up chart. When the user clicks the descriptor 2 link, FieldChange PeopleCode on the PTNODE_DESCR2 field in the node record performs the following actions:

- Sets the node's SPTPOPUPEXPAND_FLAG = "Y".
- Sets the node's PTPOPUPHDRMAINDESC.
- Sets the node's PTPOPUPHDRMAINICON.
- If the node's PTHASPOPUP_FLAG = "X", then populates the pop-up node rowset and sets PTHASPOPUP_FLAG = "Y" to indicate that the node's descriptor was clicked for the first time.
- Refresh the chart with the pop-up displayed.

Closing a Pop-up Node

When the user closes a pop-up node it triggers field change processing on the PTPOPUPEXPAND_FLAG field.

FieldChange PeopleCode on the PTPOPUPEXPAND_FLAG field would need to restore any changes that were made to the originating node's display characteristics and reset the node's PTPOPUPEXPAND_FLAG = "N" .

Selecting a Linkable Menu Item or Drop-Down List Box Item

When a user selects a linkable menu item or drop-down list box item, the system sets the PTDESCR n _SI_ID (PTDESC n _SLCT_ITM_ID if not using a node display record) field value to the value of the list item ID and FieldChange PeopleCode associated with the PTNDDDESC n LINKABLE field executes.

Selecting a Breadcrumb

When a user clicks on a linkable breadcrumb, any FieldEdit and FieldChange PeopleCode in the PTORGCRMBID field executes. Typically PeopleCode is used to redraw the organization giving focus to the node that was clicked.

Clicking on a Photograph

When a user clicks on a node image, field change PeopleCode on the PTNDMAINICON_IMAGE field executes.

Clicking on a Node

When a user clicks on the body of a node – not on a link, linkable drop-down list, or image – field change PeopleCode on the PTCHART_NODE field executes.

Organization Chart Subrecord Definitions

This section describes the following organization chart subrecord definitions:

- PTORGNODE_SBR
- PTORGGPOPUP_SBR
- PTORGCRMB_SBR

- PTORGBOXLIST_SBR
- PTORGBOXFLD_SBR
- PTORGIM_SBR
- PTNODE_DISP_SBR

PTORGNODE_SBR

This table describes the fields in PTORGNODE_SBR:

Field	Description
PTCHART_NODE	Specifies the node name. This is a key field.
PTPARENT_CHART_ND	Specifies the parent of the current chart node. This is a key field. If a node does not have a parent node defined, then the node is placed on the first level.
PTND_DISPLAY_ORDER	Specifies the display order of the sibling nodes for the same parent node. Nodes display left to right according to display order. By default, the nodes are ordered as they appear in the rowset.
PTCONNECTLINESTYLE	Specifies the style class name for connection line style. The default style class is PT_ORGCHART_CONNECT1.
PTNDMAINICON_IMAGE	Specifies the main icon image name for the node.
PTNODESTYLENAME	Specifies the style class name for the node to control node background color, border, style, and so on. The default style class is PT_ORGNODE.
PTFOCUS_FLAG	Specifies a focused node (that is, the node that has focus). Y – Focused node. N – Not a focused node. If more than one node is set to focused, only the first focused node in the rowset will be recognized as the focused node. The default is “N”.

Field	Description
PARENT_FLAG	Indicates whether a node is a parent. Y – The node is a parent and its direct children are already loaded into the rowset. X – The node is a parent and its direct children are not loaded in the rowset (that is, they will be loaded on demand). N – The node is not a parent. The default value is “N”. An expanded/collapsed icon is only displayed on the parent node. If your PeopleCode does not set the CollapsedImage and ExpandedImage properties of the organization chart, no expanded/collapsed icon is displayed on any of the nodes and all expand/collapse actions are disabled.
EXPANDED_FLAG	Indicates whether the node is expanded or collapsed. Y – The chart shows the node expanded with the expanded image icon and its immediate children displayed. N – The chart shows the node collapsed with the collapsed image icon.
DISPLAYED_FLAG	Specifies whether the node displays in the chart. Y – The node displays if the parent node's EXPANDED_FLAG = "Y" (the parent node is not collapsed). N – This node and its child nodes do not display in the chart's display area. The default is “Y”.
PTHASPOPUP_FLAG	Indicates whether the node has a pop-up. Y – This node has a link that invokes a pop-up and the data for the pop-up is already loaded into the pop-up node rowset. X – This node has a link that invokes a pop-up and the data for the pop-up is not loaded in the rowset. The data will be loaded on demand. N – This node does not have a link to invoke a pop-up chart. The default value is “N”.
PTPOPUEXPAND_FLAG	Indicates whether a node's pop-up nodes display. Y – Pop-up nodes display. N – No pop-up nodes display. If the user clicks the close icon in the pop-up node, the FieldChange event for PTPOPUEXPAND_FLAG executes. The application sets the value of PTPOPUEXPAND_FLAG to “N” when the pop-up node is closed.

Field	Description
PTNODE_DESCR n	Specifies the text for descriptorn of the node, where n is an integer that starts at 1 and increments by one for each descriptor used by the chart; for example, PTNODE_DESCR2. The PTORGNODE_SBR subrecord is delivered with fields for descriptors 1 – 7. If you need more than seven descriptors, add a set of descriptor fields (PTNODE_DESCRn, PTNDDDESCnLINKABLE, PTDESCRn_ICON_IMG, and PTDESCRn_ICON_POS) for each additional descriptor, to a maximum of 99 descriptors. If this is an icon-only descriptor (PTNDDDESCnLINKABLE = “I” or “O”), the text in this field is used as the data hint for the icon. The maximum length is 50 characters.
PTNDDDESC n LINKABLE	Specifies the descriptor type for descriptor n, where n is an integer from 1 to 99; for example, PTNDDDESC2LINKABLE. Y - Linkable text N - Static text I - Linkable Icon O - Icon only A -Related action menu D - Linkable drop-down menu R - Read-only (non-linkable) drop-down menu L - Linkable drop-down list box M - IM icon The default value is “N”. The value in this field is overridden by the node display template, if one is implemented.
PTDESCR n _ICON_IMG	Specifies the name of the image associated with descriptor n, where n is an integer from 1 to 99; for example, PTDESCR2_ICON_IMG. For icon-only descriptors (“I” or “O”), the text in PTNODE_DESCRn is the data hint text. Note: If PTDESCRn_ICON_IMG is set to a valid image, the image is only displayed if PTNDDDESCnLINKABLE is set to “Y”, “N”, “I”, or “O”..
PTDESCR n _ICON_POS	Indicates the position of the icon relative to descriptor n, where n is an integer from 1 to 7; for example, PTDESCR2_ICON_POS. L – To the left of the description. R – To the right of the description. The default value is based on user language. For instance, “L” for English and “R” for Hebrew.

Field	Description
PTADJUSTFORNULLS	Indicate whether to collapse empty attributes to conserve vertical space within the nodes. Y – Collapse. N – Do not collapse. The default value is “N”.
PTPOPUPHDRMAINDESC	Specifies the main descriptor of the pop-up chart header for this node
PTPOPUPHDRMAINICON	Specifies the name of the image to place on the top left of the pop-up chart header.
PTORGCHRTIMG	Specifies the node image. The maximum image size depends on your database platform. Note: If this field is placed on a grid on the page and the column is hidden (Visible = False), the node images do not appear on the chart.
PSIMAGEVER	A unique number that is assigned to each image. This is a system-maintained value.
PTDESCR_UNDER_IMG	If you are using a node display template, this specifies the first node line number that appears under the node image. The specified line number and all following lines appear below the image. All lines prior to the specified line appear to the side of the image. If you are not using a node display template, specify an integer from 1 to 7. The corresponding descriptor and all following descriptors appear below the image. All descriptors prior to the one specified appear to the side of the image. If no value is specified, the node lines all appear to the side. If no image is displayed, this field is ignored. This field takes an integer value.
PTPHOTO_START	Specifies the node line number on which the photo starts. This field only applies if you are using a node display template.
PTNODE_DISPLAY_ID	Specifies which display template ID to use with this node.
PTCHART_SCHEMA_ID	Specifies the current schema value. The system sets this value using the ChartCurrentSchemaLevel OrgChart property value. When the user selects a different schema value, the system sets field to the new value, sets the ChartCurrentSchemaLevel OrgChart property value to the new value, and redraws the chart using the new schema level. If the application changes the ChartCurrentSchemaLevel OrgChart property value, the system sets this field to the new value and redraws the chart using the new schema level.

PTORGPOPUP_SBR

This table describes the fields in PTORGPOPUP_SBR.

Field	Description
PTCHART_NODE	Specifies the name of the node that invoked this pop-up chart. This is a key field.
PT_POP_UP_ID	The unique ID for the pop-up. This is a key field.
PTPREDECESSOR_NODE	Specifies the name of the predecessor node to the current chart node. The predecessor node is the node that invoked this node. Your application PeopleCode must set this value when the link is clicked on the predecessor node.
PTND_DISPLAY_ORDER	Sets the display order of the nodes within the same pop-up. By default the nodes are ordered as they appear in the rowset.
PTNDMAINICON_IMAGE	Specifies the main icon image name for the node.
PTNODESTYLENAME	Specifies the style class name for the node to control node background color, border, style, and so on. If no style class name is specified the PeopleTools default style class is used.
PT_POPUP_PARENT_ID	Set to the ID of the parent pop-up chart to which the PT_POP_UP_ID is attached. If the chart ID PT_POP_UP_ID is connected from the organization node, then its corresponding PT_POPUP_PARENT_ID value is NULL.
PTHASPOPUP_FLAG	Indicates whether the node has a pop-up. Y – This node has a link that invokes a pop-up and the data for the pop-up is already loaded into the pop-up node rowset. X – This node has a link that invokes a pop-up and the data for the pop-up is not loaded in the rowset. The data will be loaded on demand. N – This node does not have a link to invoke a pop-up chart. The default value is “N”.
PTPOPUPEXPAND_FLAG	Indicates whether a node’s pop-up nodes display. Y – Pop-up nodes display. N – No pop-up nodes display. If the user clicks the close icon in the pop-up node, the FieldChange event for PTPOPUPEXPAND_FLAG executes. The application sets the value of PTPOPUPEXPAND_FLAG to “N” when the pop-up node is closed.

Field	Description
DISPLAYED_FLAG	Indicates whether the node will appear in the pop-up chart. Y = The node appears in the pop-up chart. N = The node never appears in the pop-up chart, including its pop-up nodes. Default is “Y”.
PTNODE_DESCR n	Specifies the descriptor n of the node, where n is an integer from 1 to 8; for example, PTNODE_DESCR2. Maximum length is 50 characters.
PTNDDDESC n LINKABLE	Specifies whether the descriptor n is linkable, where n is an integer from 1 to 8; for example, PTNDDDESC2LINKABLE. Y – Linkable N – Not linkable
PTDESCR n _ICON_IMG	Specifies the name of the image associated with descriptor n , where n is an integer from 1 to 8; for example, PTDESCR2_ICON_IMG.
PTDESCR n _ICON_POS	Indicates the position of the icon relative to descriptor n , where n is an integer from 1 to 8; for example, PTDESCR2_ICON_POS. L – To the left of the description. R – To the right of the description. The default value is based on user language. For instance, “L” for English and “R” for Hebrew.
PTADJUSTFORNULLS	Indicates whether to collapse empty attributes to conserve vertical space within the nodes. Y – Collapse N – Do not collapse
PTPOPUPHDRMAINDESC	Specifies the main descriptor of the pop-up chart header for this node.
PTPOPUPHDRMAINICON	Specifies the name of the image to place on the top left of the pop-up chart header.

PTORGCRMB_SBR

This table describes the fields in PTORGCRMB_SBR:

Field	Description
PTORGCRMBID	Assigns the breadcrumb ID. PTORGCRMBID is a key field.
PTPARENT_ORGCRMBID	Specifies the breadcrumb ID of Parent node. Only one row, which will be the first breadcrumb, can have this field blank or there will be a runtime error.
PTORGCRMBDESCR	Sets the breadcrumb description. In an organization chart this is generally a name.

Field	Description
DISPLAYED_FLAG	The displayed flag. Y = Displayed. N = Not displayed. The default is "N".
PTORGCRMBLINKABLE	The linkable flag. Y = Linkable N = Not linkable The default is "Y".

PTORGBOXLIST_SBR

This table describes the fields in PTORGBOXLIST_SBR:

Field	Description
PTDESCR_DRPDWN_ID	Specifies the node description drop-down list box ID. PTDESCR_DRPDWN_ID is a key field.
PTORGDRPLSTITM_ID	The drop down list item ID for the specified drop down list. PTORGDRPLSTITM_ID is a key field.
PTORGDRPLS_GRP_ID	Specify the group ID for the drop down list item in the drop-down box. For a folder menu, set this value to the list item ID (PTORGDRPLSTITM_ID) of the parent folder. For a top-level folder, set this value to blank. For a flat (single-level) drop-down list box, set this value to blank.
PTND_DISPLAY_ORDER	Set the display order of the list item within the same drop-down box. By default, the list will display in the order the list items appear in the rowset.
PTNODELISTDESCR	The text that will appear for the drop down list item. The maximum length is 60 characters.
PTORGLISTDESCSTYLE	Specify the style class for the list item. The default style class for drop down list items depends on the type of drop down. See Setting Drop-Down Styles .

PTORGBOXFLD_SBR

This table describes the fields in PTORGBOXFLD_SBR:

Note

This subrecord is retained for backward compatibility. With PeopleTools version 8.52 and later, Oracle recommends using node display templates. The PTORGBOXFLD_SBR is not used with a chart that implements node display templates.

See [Configuring the Node Record for Drop-Downs](#).

Field	Description
PTDESCR n _DROPDOWN	The drop down list ID for descriptor n , where n is an integer from 1 to 7; for example, PTDESCR2_DROPDOWN.
PTDES n _SLCT_ITM_ID	The selected list Item ID in the drop-down box for descriptor n, where n is an integer from 1 to 7; for example, PTDES2_SLCT_ITM_ID. The system sets this field to the value of the list item ID when the user clicks on a list item in the drop-down list box for descriptor n. You can add PeopleCode to the PTNODE_DESCRn field that performs business logic using the value in this field.

PTORGIM_SBR**Note**

PTORGIM_SBR has been desuported and currently exists for backward compatibility only.

PTNODE_DISP_SBR

This table describes the fields in PTNODE_DISP_SBR:

Field	Description
PTNODE_DISPLAY_ID	Specifies the ID of a display template. The PTNODE_DISPLAY_ID field on the organization chart node record specifies the node display template to be used for the node.
PT_SCHEMA_LEVEL_ID	Specifies the schema level. Specify a numeric value 1-10.
PT_CNT_ID	Specifies the descriptor. For example, PTNODE_DESCR1.
PT_NODE_VIEW	Specifies the name of the node view.
PT_LINE_NUM	Specifies the node line number on which the descriptor will appear.

Field	Description
PT_DISPLAY_TYPE	Specifies the display item type. Y - Linkable text N - Static text I - Linkable Icon O - Icon only A -Related action menu D - Linkable drop-down menu R - Read-only (non-linkable) drop-down menu L - Linkable drop-down list box M - IM icon If this field is set to “M” but no rows are defined in the PT_ORGIM_SBR for the node, no IM icon will be shown. The value in this field overrides the value in PTNDDESCnLINKABLE in the organization chart node record.
PT_DISPLAY_FLAG	Specifies whether the descriptor will be displayed in the node. The default value is “Y”.
PTND_DISPLAY_ORDER	Sets the display order of the descriptor/icon within the line number.
PT_PADDING_RIGHT	Specifies the padding, in pixels, to the right of the descriptor. If PT_COL_ALIGN is set to centered or left aligned, this field is ignored.
PT_PADDING_LEFT	Specifies the padding, in pixels, to maintain to the left of the descriptor. If PT_COL_ALIGN is set to centered or right aligned, this field is ignored.
PT_CNT_STYLE	Specifies the style class name that will be used to control the style of the descriptor. The default style class for drop downs depends on the type of drop down. See Setting Drop-Down Styles.
PT_DESCR_MAX	Specifies the maximum length for the descriptor. If the full descriptor text is longer than PT_DESCR_MAX, then an ellipsis (“...”) is appended to the displayed text. The entire text appears in a data hint. The default value is 50 characters. This value overrides any value set in the NodeMaxDisplayDescLength OrgChart property.

Minimum Methods and Properties

At a minimum, these methods are needed to create an organization chart:

- `SetNodeData`

- SetNodeRecord

These methods are required if your organization chart uses pop-ups:

- SetPopUpNodeData
- SetPopUpNodeRecord

These methods and properties are required if your organization chart uses IM presence:

- SetIMRecord
- SetIMData
- IMPresence

These methods are required if your organization chart uses node display templates:

- SetNodeDisplayDataRecord
- SetNodeDisplayData

These methods and properties are required if your organization chart uses zooming schemas:

- SetSchemaLevels
- ChartCurrentSchemaLevel
- ID SchemaLevel class property
- ImageHeight SchemaLevel class property

These methods are required if your organization chart uses breadcrumbs:

- SetCrumbData
- SetCrumbRecord

These methods are required if your organization chart uses drop-down list boxes:

- SetDropdownData
- SetDropdownRecord

Scope and Data Type of an OrgChart Object

Chart objects are declared using the Chart data type. For example,

```
Local OrgChart &MyOrgChart;
```


A chart object can be instantiated only from PeopleCode.

You can use this object only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a Component Interface, and so on.

Using the RatingBoxChart Class

A rating box chart is an interactive chart that displays nodes on a two-dimensional grid. If drag-and-drop is enabled for the chart, a user can move the nodes from one quadrant to another on the grid. When the user moves a node, the underlying data is updated automatically.

The rating box chart in this example displays ratings on the dimensions of potential and performance. The nine combinations of ratings produces a grid with nine quadrants:

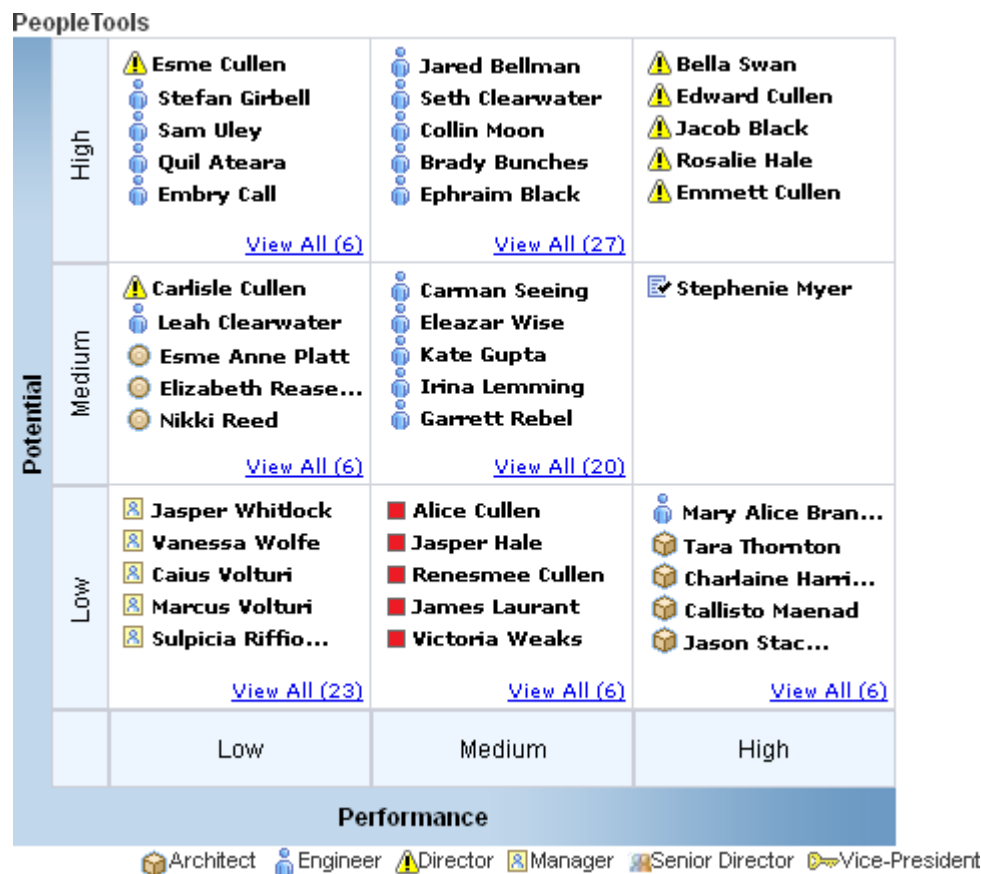

This section provides an overview of rating box chart terminology and discusses how to use the RatingBoxChart Class.

Understanding Rating Box Chart Terms

The following is a list of terms that apply specifically to rating box charts.

Field or Control	Description
Box	A rating box chart is an array of boxes (referred to as quadrants) arranged in a grid along the x and y axes. See <i>Quadrant</i> for more information.
Description	A text string that is associated with a node. The node description optionally displays with the node icon.
Icon	An image associated with a node that displays in a quadrant on the rating box chart.
Node	A single data point on a rating box chart. A node represents an individual entity, such as an employee, customer, or product. You can drag-and-drop a node to other quadrants in the rating box chart grid.

Field or Control	Description
Node record	A record that contains the properties and data values for each node on the rating box chart. The node record must include a copy of the subrecord PTRATINGBIX_SBR.
Quadrant	A rating box chart is an array of quadrants arranged in a grid along the x and y axes. Each quadrant represents a pair of ratings, one for the x value and one for the y value. Each quadrant can display a custom label as defined by an instance of the QuadrantSchema class. See Using the QuadrantSchema Class .
Rating	A text string that is assigned to each quadrant in the rating chart. Each quadrant has an x rating, based on its position on the horizontal axis, and a y rating, based on its position on the vertical axis.
Title	There are three titles: Main title, x-axis title, and y-axis title. A title is text that identifies that portion of the chart.

Using Rating Box Charts in PeopleSoft Applications

A rating box chart displays nodes on a chart that is divided into two or more quadrants arrayed in a grid.

An application can correlate nodes, represented by icons, with various entities, such as employees, customers, or products, and various attribute pairs, such as potential/performance, cost/benefit, or opportunity/risk.


A user interacts with the rating box by dragging nodes to different quadrants. When a node is moved, its underlying x (horizontal) and y (vertical) values are updated. A user can also interact with the rating box by changing a node's x or y values in the grid that contains the rating box values if the application makes the grid visible and editable.

To drag and drop a node using an Apple iPad, tap the node's description. A copy of the node with a red dashed border appears. Then tap the quadrant to which you want to move the node. The node appears in the new location.

The **View all** pop-up automatically closes if the user moves a node to another quadrant.

Using PeopleCode, you can associate each node with an image, or icon, and a description. You can configure a rating box to display nodes with icons and descriptions or with only icons.

If a quadrant contains more nodes than the number set in the RatingBoxChart property BoxMaxDisplayItems, the user can click a link at the bottom of the quadrant to launch a pop-up that contains all the nodes. The quadrant border changes color to indicate that the quadrant has a pop-up open. A vertical scrollbar enables the user to scroll through all the nodes in the list as shown in this example:

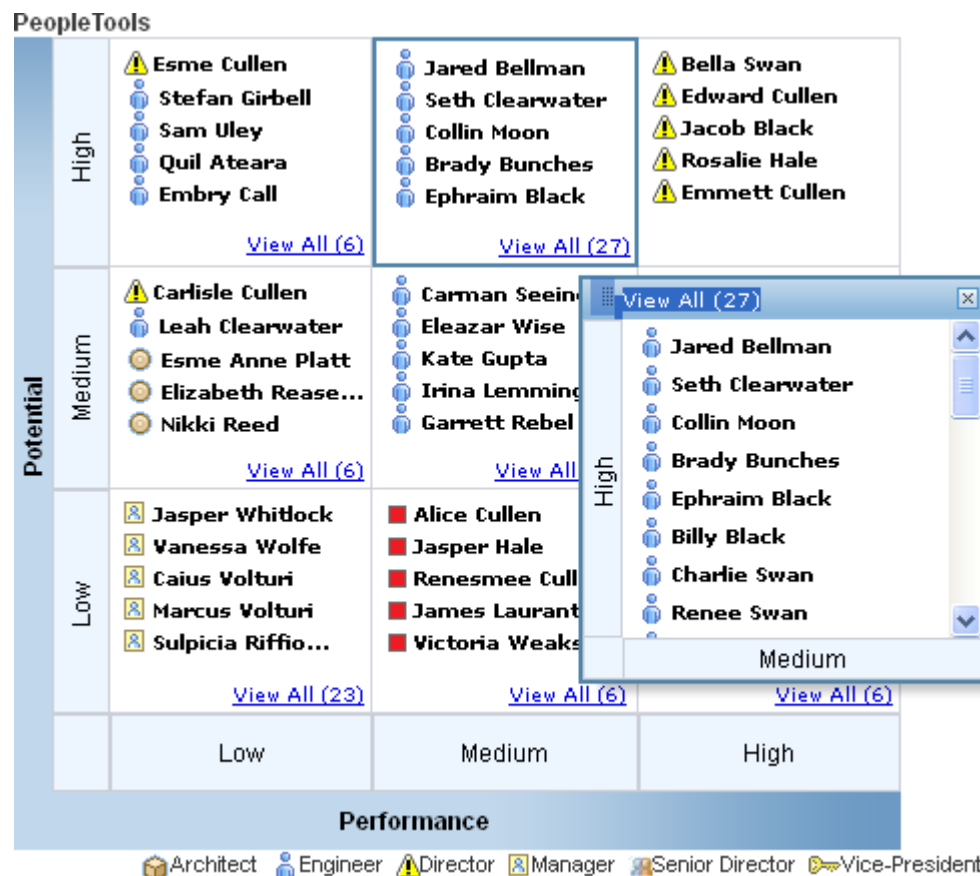

Related Topics

- [BoxMaxDisplayItems property: RatingBoxChart class](#)

Creating Rating Box Charts Using the RatingBoxChart Class

When you add a rating box chart to a page in Application Designer, you use the chart properties to associate the chart control with a record field. You will use this field name to identify the chart in PeopleCode.

You will need to create a record that will be the rating box chart node record. The record can be a standard database record or a derived/work record. The node record holds the values for the properties and data for each of the rating box chart nodes.

The record can have any name, but it must include a clone of the PeopleTools-delivered subrecord PTRATINGBOX_SBR. Since the subrecord will carry the FieldChange PeopleCode for the chart, in most cases you should create a unique subrecord for each chart. The node record must be placed on a page at level one on the component so that its PeopleCode will be loaded into the component buffer. It can be hidden.

In your chart PeopleCode, typically in the Activate event, you will create and populate a rowset linked to the chart's node record. This must be a component rowset, linked to the chart's node record, not a standalone rowset. The rowset has one row for each node in the chart.

Actions and Events

When the IsDragable property is set to True, drag-and-drop is allowed for the rating box chart. Otherwise, drag-and-drop is not allowed.

When a user drags the node from one quadrant to another, PeopleTools updates the values for the node's PTXAXISRATINGS and PTYAXISRATINGS values, changing the node's x and y values to the new values. This change invokes field change processing on the PTXAXISRATINGS and PTYAXISRATINGS fields on the rating box node record. Typically, FieldChange PeopleCode performs business logic and refreshes the chart display.

Text Orientation

The orientation of the main title in a rating box chart is always horizontal.

The orientation of the x-axis title and x-axis labels is always horizontal.

The orientation of the y-axis title and y-axis labels is always vertical.

Rating Box Chart Subrecord Definition

These are the fields in PTRATINGBOX_SBR:

Field	Description
PTCHART_NODE	Specifies the node name. This is the key to the record.
PTND_DISPLAY_ORDER	Specifies the display order of the nodes within the chart. By default nodes will display in the same order as in the rowset. You must provide a unique value for display order for each node in the rating box rowset so that the nodes will display in the correct order in the chart. A runtime error message is thrown when the display order is not unique for each node in the rating box rowset.
PTNODE_DESCR1	Specifies the main description for the node.
PTNODEDESCRSTYLE	Specifies the style class that defines the description's text font, type, color, size, and so on.
PTNDDESC1LINKABLE	Reserved for future use.
PTDESCR1_ICON_IMG	Specifies the image name for the main description.
PTDESCR1_ICON_POS	Indicates where to place the icon relative to the description. L – Left of the description R – Right of the description
PTXAXISRATINGS	Specifies the x-axis rating for the current node.
PTYAXISRATINGS	Specifies the y-axis rating for the current node.
DISPLAYED_FLAG	Indicates whether the node will display in the chart area. Y – The node will display in the chart area. N – The node will not display in the chart area. The default value is "Y".

Minimum Methods

At a minimum these methods are needed to create a rating box chart.

- SetRBNodeData
- SetRBNodeRecord
- SetXAxisLabels
- SetYAxisLabels

Minimum Properties

At a minimum, these properties are needed to create a rating box chart.

- XAxisBoxNum
- YAxisBoxNum

These properties are required if the chart includes a view all pop-up:


- PopUpWidth
- PopUpHeight

Using the QuadrantSchema Class

You can attach instances of the QuadrantSchema class to your rating box chart to provide additional information to users. Specifically, you can label quadrants in the rating box chart.

In the following example, six of the nine available quadrants in the rating box chart are associated with a QuadrantSchema object and have custom labels; the other three quadrants are unlabeled.

RatingBox Chart with Quadrant Labels

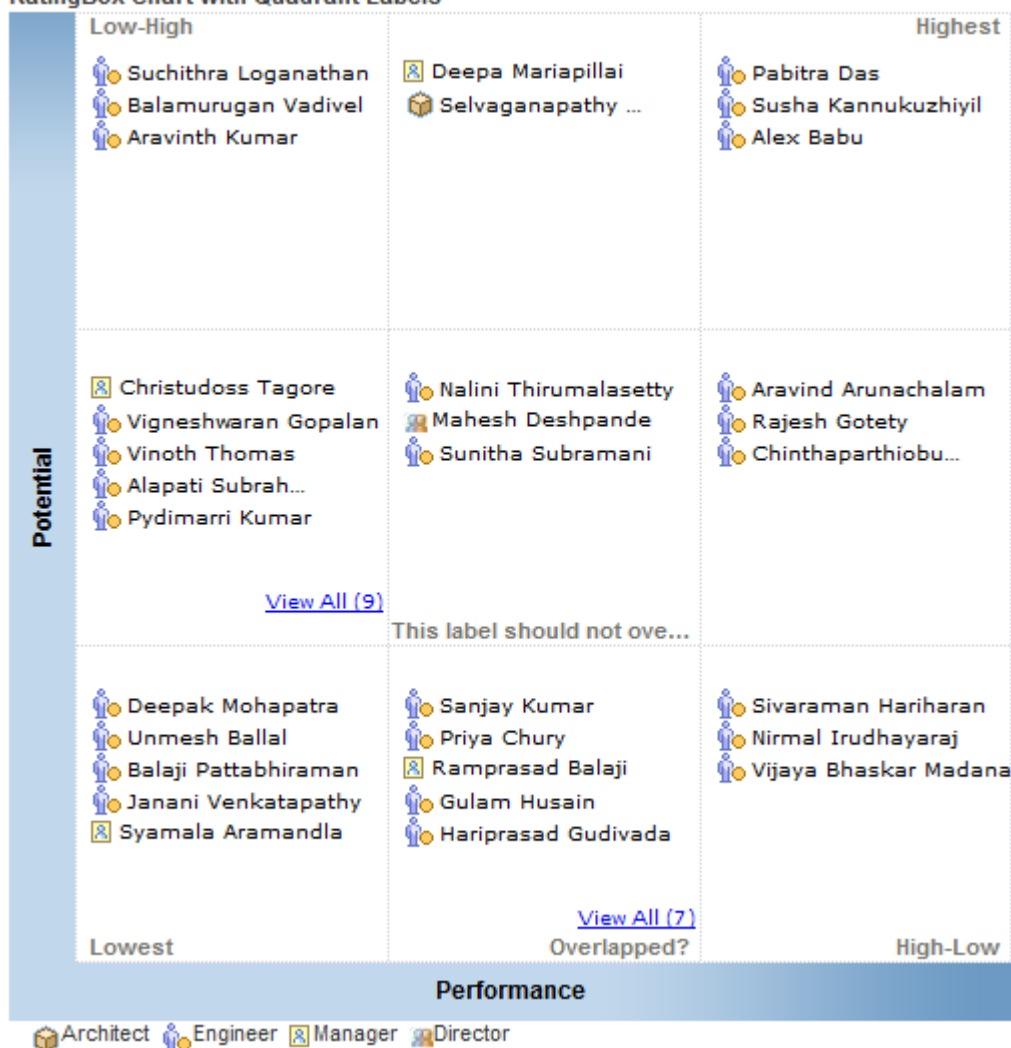

Each label is defined by an instance of `QuadrantSchema`. These instances are created independently in `PeopleCode` and then attached as an array to your instance of `RatingBoxChart`.

For each instance of `QuadrantSchema` you must specify the x-value/y-value pair that defines the quadrant for the text. You can also specify the location of the text within the quadrant.

The following `PeopleCode` example demonstrates how to create unique instances of `QuadrantSchema`, set their properties, and assign them to a rating box chart in order to display a custom label in six rating box quadrants.

```

/***** Create Quadrant Schema 1 *****/
&oQuadrantSchema1 = CreateObject("QuadrantSchema");
&oQuadrantSchema1.XRating = "Low";
&oQuadrantSchema1.YRating = "Low";
&oQuadrantSchema1.LabelText = "Lowest";
&oQuadrantSchema1.LabelPosition = %Bottom_Left;

/***** Create Quadrant Schema 2 *****/
&oQuadrantSchema2 = CreateObject("QuadrantSchema");

```

```

&oQuadrantSchema2.XRating = "High";
&oQuadrantSchema2.YRating = "High";
&oQuadrantSchema2.LabelText = "Highest";
&oQuadrantSchema2.LabelPosition = %Top_Right;

/***** Create Quadrant Schema 3*****/
&oQuadrantSchema3 = CreateObject("QuadrantSchema");
&oQuadrantSchema3.XRating = "Medium";
&oQuadrantSchema3.YRating = "Medium";
&oQuadrantSchema3.LabelText = "This label should not overflow the quadrant!";
&oQuadrantSchema3.LabelPosition = %Bottom_Right;

/***** Create Quadrant Schema 4*****/
&oQuadrantSchema4 = CreateObject("QuadrantSchema");
&oQuadrantSchema4.XRating = "High";
&oQuadrantSchema4.YRating = "Low";
&oQuadrantSchema4.LabelText = "High-Low";
&oQuadrantSchema4.LabelPosition = %Bottom_Right;

/***** Create Quadrant Schema 5*****/
&oQuadrantSchema5 = CreateObject("QuadrantSchema");
&oQuadrantSchema5.XRating = "Low";
&oQuadrantSchema5.YRating = "High";
&oQuadrantSchema5.LabelText = "Low-High";
&oQuadrantSchema5.LabelPosition = %Top_Left;
rem &oQuadrantSchema5.LabelPosition = 4;

/***** Create Quadrant Schema 6*****/
&oQuadrantSchema6 = CreateObject("QuadrantSchema");
&oQuadrantSchema6.XRating = "Medium";
&oQuadrantSchema6.YRating = "Low";
&oQuadrantSchema6.LabelText = "Overlapped?";
&oQuadrantSchema6.LabelPosition = %Bottom_Right;

```

Then, the following portion of the program builds an array of these instances and that then associates that array to the instance of RatingBoxChart:

```

&QuadrantSchemas = CreateArray(&oQuadrantSchema1, &oQuadrantSchema2,
&oQuadrantSchema3, &oQuadrantSchema4, &oQuadrantSchema5, &oQuadrantSchema6);

&oRatingBoxChart.SetQuadrantSchemas(&QuadrantSchemas);

/* Reduce clutter in the chart by hiding the axis labels */
&oRatingBoxChart.ShowAxisLabels = False;

```

Related Topics

- [SetQuadrantSchemas method: RatingBoxChart class](#)
- [QuadrantSchema Class Properties](#)

These properties are used by the QuadrantSchema class. The properties are described in alphabetic order.

Data Type of a RatingBoxChart Object

Chart objects are declared using the Chart data type. For example,

```
Local RatingBoxChart &RatingBoxChart;
```

Scope of a RatingBoxChart Object

A chart object can be instantiated only from PeopleCode.

You can use this object only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message notification, a Component Interface, and so on.

Charting Classes Reference

The charting classes reference contains these sections:

- Charting classes built-in functions.
- Chart class methods.
- Chart class properties.
- ChartClientState class properties.
- ReferenceArea class properties.
- ReferenceLine class properties.
- Series class properties.
- ToolTipLabel class properties.
- LEDGauge class methods.
- LEDGauge class properties.
- RatingGaugeChart class methods.
- RatingGaugeChart class properties.
- RatingGaugeState class properties.
- RatingGaugeState class properties.
- StatusMeterGauge class methods.
- GaugeThreshold class properties.
- Threshold class properties.
- SparkChart class methods.
- SparkChart class properties.
- SparkChartItem class properties.
- Gantt class methods.
- Gantt class properties.
- OrgChart class methods.
- OrgChart class properties.

- SchemaLevel class properties.
- RatingBoxChart class methods.
- RatingBoxChart class properties.
- QuadrantSchema class properties

Charting Classes Built-in Functions

Chart Classes

PeopleCode Language Reference: GetChart function

PeopleCode Language Reference: GetChartURL function

PeopleCode Language Reference: GetReferenceArea function

PeopleCode Language Reference: GetReferenceLine function

PeopleCode Language Reference: GetSeries function

PeopleCode Language Reference: GetToolTip function

Gauge Classes

PeopleCode Language Reference: GetLEDGauge function

PeopleCode Language Reference: GetRatingGauge function

PeopleCode Language Reference: GetRatingGaugeState function

PeopleCode Language Reference: GetStatusMeterGauge function

PeopleCode Language Reference: GetThreshold function

Spark Chart Classes

PeopleCode Language Reference: GetSparkChart function

PeopleCode Language Reference: GetSparkChartItem function

Gantt Class

PeopleCode Language Reference: GetGanttChart function

OrgChart Class

PeopleCode Language Reference: GetOrgChart function

RatingBoxChart Class

PeopleCode Language Reference: GetRatingBoxChart function

TimeLine Class

PeopleCode Language Reference: GetTimeLine function

Chart Class Methods

These methods are used by the Chart class. The methods are listed in alphabetical order.

Reset method: Chart class

Syntax

`Reset()`

Description

Use the Reset method to clear all existing chart settings and data.

Parameters

None.

Returns

None.

Related Topics

- [Refresh method: Chart class](#)

SetColorArray method: Chart class

Syntax

`SetColorArray(&Array_of_Color)`

Description

PeopleSoft charts are delivered with a default color sequence. If you want to specify a different sequence, use the SetColorArray method to set the colors for a series. You can specify only a one-dimensional array for the parameter.

This method applies to the base chart and to the overlay chart. Color values are applied first to the base chart, then to the overlay chart. For example, if the base chart contains four series, then the fifth color value is applied to the first series in the overlay chart, and so on.

The type of array can be any of the following:

- String
- Number
- Integer
- Decimal

Use the SetColorArray method for line charts instead of SetDataColor because SetDataColor does not work with line charts. Individual line segments cannot be colored because there are fewer line segments than points. Use SetColorArray instead to color each complete line (series).

Parameters

Parameter	Description
<i>&Array_of_Color</i>	Specify an already instantiated array that contains the color values that you want for the series. You can specify either a constant or a number.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default	Default series color. When a data point is set to this, the default series color or the color that has been set by the programmer for that series is used instead. This value works only with the SetColorArray method of the Chart class.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

Returns

None.

Example

The following example sets the four series in the chart:

```
&NumArray = CreateArray(1, 3, 6, 9);  
  
&oChart.SetColorArray(&NumArray);
```

SetData method: Chart class

Syntax

```
SetData({Record_Name | &Rowset})
```

Description

Use the SetData method to specify where the data from the chart is coming from.

You can use either a record name or an already instantiated, populated rowset. In general, specify a record when building a chart from page data and a rowset when building a chart from a standalone rowset.

If you make a change to the underlying data of a chart, call the SetData method again to update the chart.

Parameters

Parameter	Description
<i>Record_Name</i>	Specify the name of a record to be used to populate the chart with data.
<i>&Rowset</i>	Specify the name of an already instantiated rowset to populate the chart with data. This is generally a standalone rowset.

Returns

None.

Example

The following is the minimum code you need to create a PeopleSoft chart.

```
Local Chart &MyChart;  
  
&MyChart = GetChart(ABS_HIST.CHART);  
&MyChart.SetData(ABS_HIST);  
&MyChart.SetDataYAxis(ABS_HIST.Reason);  
&MyChart.SetDataXAxis(ABS_HIST.Duration);
```

The following example creates a chart using a standalone rowset.

```
Function IScript_GetChartURL()  
local object &MYCHART;
```



```
local string &MYURL;
local rowset &MYROWSET;

&MYCHART = CreateObject("Chart");

&MYROWSET = CreateRowset(Record.ABS_HIST);

&EmplID = %Emplid;

&MYROWSET.Fill("Where EMPLID :=1", &EmplID);

&MYCHART.SetData(&MYROWSET);
&MYCHART.SetDataXAxis(ABS_HIST.ABSENCE_TYPE);
&MYCHART.SetDataYAxis(ABS_HIST.DURATION_DAYS);

&MYURL = %Response.GetChartURL(&MYCHART);

/* use &MYURL in your application */
...
End-Function;
```

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataColor method: Chart class

Syntax

```
SetDataColor(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataColor method to specify a field that contains the color for each data point. Each field for each data point must contain either a number or a constant that specifies the color you want to use.

Use the SetColorArray method for line charts instead of SetDataColor because SetDataColor does not work with line charts. Individual line segments cannot be colored because fewer line segments exist than points. Use SetColorArray instead to color each complete line (series). See [SetColorArray method: Chart class](#).

Note

This method has no effect when used with an overlay.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1, ...</i>	Specify the name of the record and one or more fields on that record that contain the colors for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <code>SetDataYAxis</code> method.

See [SetColorArray method: Chart class](#).

Returns

None.

Related Topics

- [SetDataYAxis method: Chart class](#)

SetDataHints method: Chart class

Syntax

```
SetDataHints(Record_Name.Field_Name1, ...)
```

Description


Use the `SetDataHints` method to override the default text that appears as a caption when you mouse over data in a chart (that is, a bar, a pie slice, or a data point).

! Important


The `ToolTipLabel` class provides an alternative method for creating custom tooltips for data items on charts. See [Using the ToolTipLabel Class](#) for more information.

The default data hint text that appears is constructed from information about the composition of the chart that you have defined and the row of data being charted. Specifically, its structure depends on whether the chart has a data series or not.

If you do not specify `SetDataHints` and do not specify `SetDataSeries`, then the value of the x-axis (Group) and the value of the y-axis appear in the data hint:

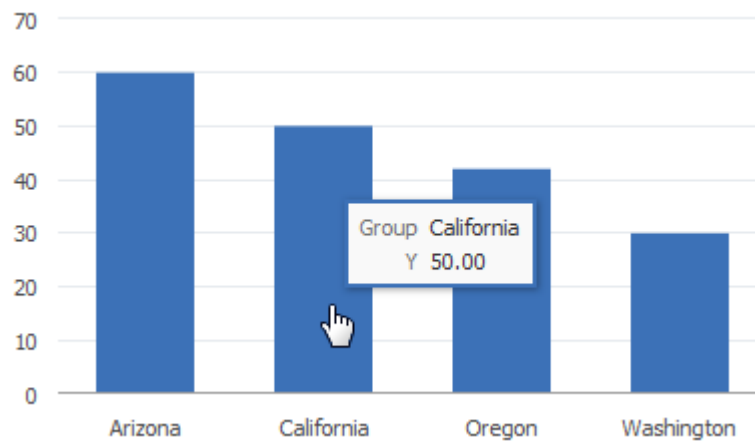

If you do not specify `SetDataHints` but do specify `SetDataSeries`, then the value of the x-axis (Group), the y-axis, and the series appear in the data hint:

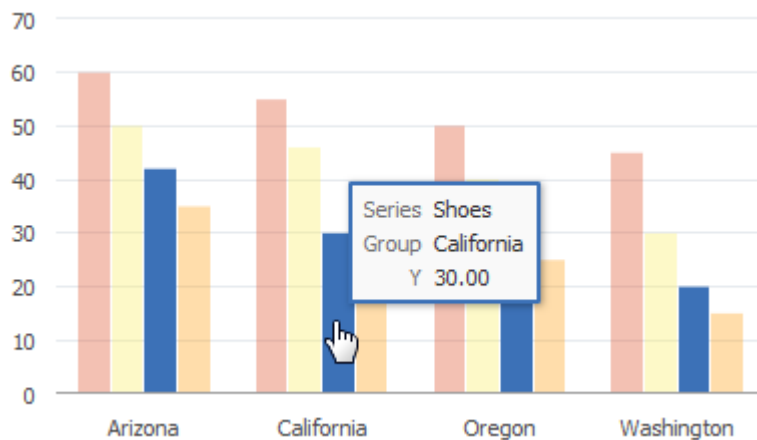


If you use `SetDataHints`, the text that appears as a caption when you mouse over data will be precisely that which is in the `RECORD.FIELD` for that row of data. This is true whether a data series is present or not.

For example, `SetDataHints` is set as follows:

```
&cChart12.SetDataHints(DOC_CHRT_SLS_2.DOC_CHRT_MASCOT);
```


Mousing over the bar representing California reveals *Golden Bears* as the value of the `DOC_CHRT_MASCOT` field for that row in the `DOC_CHRT_SLS_2` rowset:

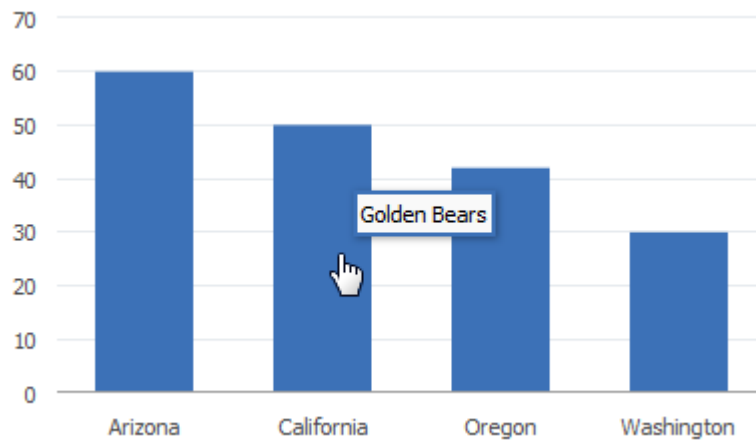

In the following example, `SetDataSeries` is already set, and `SetDataHints` is set as follows:

```
&cChart13.SetDataHints(DOC_CHRT_SLSREC.DOC_CHRT_RGN);
```

Mousing over any bar in the bar chart will display the region represented by the bar.

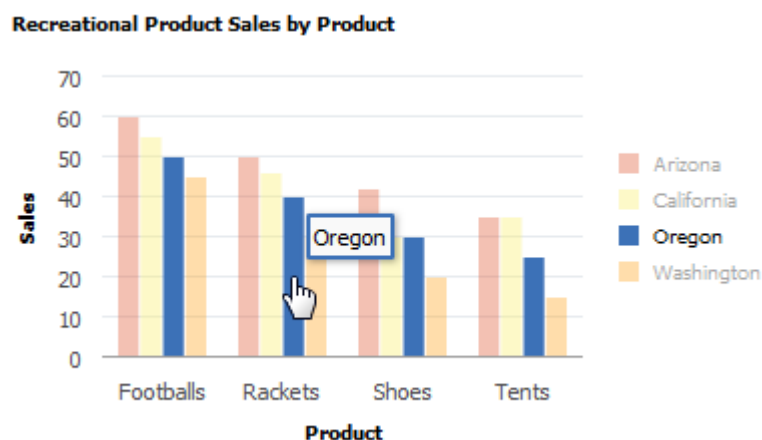

Parameters

Parameter	Description
<i>Record_Name.Field_Name1, ...</i>	Specify the name of the record and one or more fields on that record that contain the tooltips for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <code>SetDataYAxis</code> method.

Returns

None.

Example

```
&cChart13.SetDataHints(DOC_CHRT_SLSREC.DOC_CHRT_RGN);
```

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetDataSeries method: Chart class](#)
- [SetDataYAxis method: Chart class](#)
- [Using the ToolTipLabel Class](#)

The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on chart data points thereby overriding the default tooltips that are automatically created from the chart data.

SetDataLabel method: Chart class

Syntax

```
SetDataLabel(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataLabel method to set labels for each data series when multiple fields are passed to SetDataYAxis. Otherwise, each series is identified by its field name.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the labels for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the SetDataYAxis method.

Returns

None.

Example

Consider the following data for a chart.

Note

For ease of viewing, the data has been split into two tables.

Chart data part 1:

QE_PARKNAME	QE_YEARS	QE_VISITORS	QE_CHART_COLOR	QE_CHART_LABEL	QE_CHART_LABELSTYLE
ARCHES	1970	1640758	2	ar	font-size:8px;
ARCHES	2000	1870577	2	ar	font-size:8px;
ARCHES	2014	2082866	2	ar	font-size:8px;
GLACIER	1970	1153564	4	gl	font-size:10px;
GLACIER	2000	1462035	4	gl	font-size:10px;
GLACIER	2014	1890374	4	gl	font-size:10px;
SEQUOIA	1970	1202979	7	sq	font-size:12px;
SEQUOIA	2000	1306583	7	sq	font-size:12px;
SEQUOIA	2014	1506584	7	sq	font-size:12px;
YELLOWSTONE	1970	2294326	3	yl	font-size:14px;
YELLOWSTONE	2000	2447729	3	yl	font-size:14px;
YELLOWSTONE	2014	2888030	3	yl	font-size:14px;
YOSEMITE	1970	2551393	1	ys	font-size:12px;
YOSEMITE	2000	2853404	1	ys	font-size:12px;
YOSEMITE	2014	2691191	1	ys	font-size:12px;

Chart data part 2:

QE_PARKNAME	QE_CHART_POS	QE_CHART_Z	QE_CHART_MARKER	QE_CHART_MARKERSIZE
ARCHES	auto	5	square	12
ARCHES	aboveMarker	6	square	12
ARCHES	afterMarker	5	square	12
GLACIER	center	8	circle	16
GLACIER	belowMarker	6	circle	16
GLACIER	beforeMarker	5	circle	16
SEQUOIA	aboveMarker	7	triangleDown	9
SEQUOIA	beforeMarker	8	triangleDown	9
SEQUOIA	auto	7	triangleDown	9
YELLOWSTONE	insideBarEdge	8	human	12
YELLOWSTONE	outsideBarEdge	7	plus	12
YELLOWSTONE	center	8	diamond	12
YOSEMITE	aboveMarker	7	triangleUp	15
YOSEMITE	belowMarker	8	triangleUp	15
YOSEMITE	auto	7	triangleUp	15

The following PeopleCode program will render the chart data as a bar chart:

```
rem Set up the chart;
&oChart = GetChart(QE_JET_CHARTWRK.QE_JET2);
&oChart.Reset();
```

```

&oChart.Type = %ChartType_2DBar;

rem Set chart data;
&oChart.SetData(Record.QE_CHART_NPARKS);

&oChart.SetDataYAxis(QE_CHART_NPARKS.QE_VISITORS);
&oChart.SetDataXAxis(QE_CHART_NPARKS.QE_YEARS);
&oChart.SetDataSeries(QE_CHART_NPARKS.QE_PARKNAME);
&oChart.XAxisTitle = "Years";
&oChart.YAxisTitle = "No. of visitors";
&oChart.FootNote = "Visitors";
&oChart.MainTitle = "Visiting National Parks";


rem Set data labels and markers;
&oChart.SetDataLabel(QE_CHART_NPARKS.QE_CHART_LABEL);
&oChart.SetDataLabelPosition(QE_CHART_NPARKS.QE_CHART_POS);
&oChart.SetDataLabelStyle(QE_CHART_NPARKS.QE_CHART_LABELSTYL);
&oChart.SetDataMarker(QE_CHART_NPARKS.QE_CHART_MARKER);
&oChart.SetDataMarkerSize(QE_CHART_NPARKS.QE_CHART_MARKERSIZ);

rem Set z-axis value;
&oChart.SetDataZAxis(QE_CHART_NPARKS.QE_CHART_Z);

rem for bubble charts;
rem &oChart.SetDataGlyphScale(QE_CHART_NPARKS.QE_CHART_Z);

```

Because bar charts do not support data markers, the chart that is rendered does not display markers.

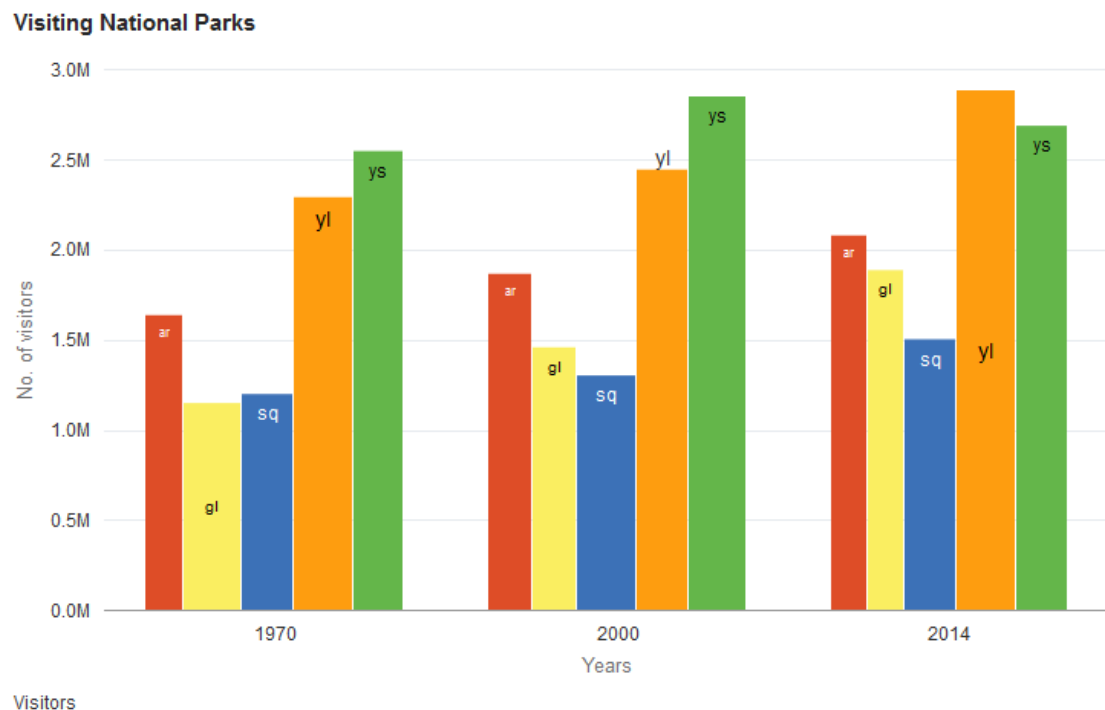


The preceding PeopleCode program can be modified to display the same data as a line chart by changing the chart type:

```
&oChart.Type = %ChartType_2DLine;
```

The line chart that is rendered from the same data includes the data labels and data markers.

Visiting National Parks

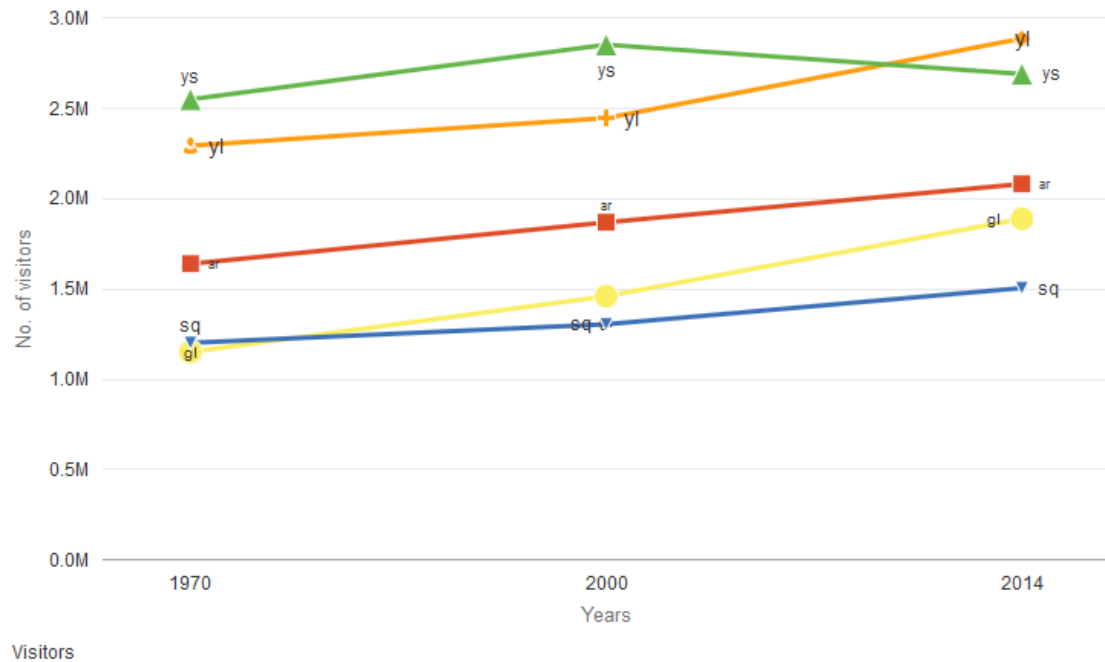

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetDataMarker method: Chart class](#)

SetDataLabelPosition method: Chart class

Syntax

```
SetDataLabelPosition(Record_Name.Field_Name1, ...)
```

Description

Use the `SetDataLabelPosition` method to set the position of the data labels, which are set by the `SetDataLabel` method.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1, ...</i>	Specify the name of the record and one or more fields on that record that contain the data for the data label positions for the chart. Note: The order of fields specified must correspond to the number and order specified by the <code>SetDataYAxis</code> method.

The String value of this field must be one of these values:

Value	Description
center	Centered on the data item.
aboveMarker	Above the marker for the data item.*
belowMarker	Below the marker for the data item.*
beforeMarker	Before the marker for the data item.*
afterMarker	After the marker for the data item.*
insideBarEdge	Inside the edge of a bar chart data item.
outsideBarEdge	Outside the edge of a bar chart data item.
outsideSlice	Outside the slice of a pie chart data item.
auto	The chart engine determines the best position for the label based on the chart type, chart size, label size and other factors. Specifically, for the bar chart family of charts: - On bar charts that aren't stacked, setting the label's position to auto will act as <code>insideBarEdge</code>. - On stacked bar charts, setting the label's position to auto will act as center.

* This value is not supported for any of the bar chart family of charts; on bar charts, the auto value is substituted instead.

Returns

None.

Example

```
&oChart.SetDataLabelPosition(QE_CHART_NPARKS.QE_CHART_POS);
```

Related Topics

- [SetDataLabel method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataLabelStyle method: Chart class

Syntax

```
SetDataLabelStyle(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataLabelStyle method to set a string defining the CSS style for the data label.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the CSS styles for the data labels for the chart. Note: The order of fields specified must correspond to the number and order specified by the SetDataYAxis method.

Returns

None.

Example

```
&oChart.SetDataLabelStyle(QE_CHART_NPARKS.QE_CHART_LABELSTYL);
```

Related Topics

- [SetDataLabel method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataMarker method: Chart class

Syntax

```
SetDataMarker(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataMarker method to set the shape of data markers, which can be used to highlight certain data points on a chart. Data markers can be used only with line charts, bubble charts, and scatter charts.

The String value of this field must be one of these values:

Value	Description
square	Square
circle	Circle

Value	Description
diamond	Diamond
plus	Plus sign
triangleDown	Triangle with tip down
triangleUp	Triangle with tip up
human	Human
auto	Automatically selected by the chart engine

Parameters

Parameter	Description
<i>Record_Name.Field_Name1, ...</i>	Specify the name of the record and one or more fields on that record that contain the data for the data marker types for the chart. Note: The order of fields specified must correspond to the number and order specified by the <code>SetDataYAxis</code> method.

Returns

None.

Example

```
&oChart.SetDataMarkerSize(QE_CHART_NPARKS.QE_CHART_MARKER);
```

Related Topics

- [SetDataLabel method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataMarkerSize method: Chart class

Syntax

```
SetDataMarkerSize(Record_Name.Field_Name1, ...)
```

Description

Use the `SetDataMarkerSize` method to set the size of the data markers.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1, ...</i>	Specify the name of the record and one or more fields on that record that contain the data for the data marker sizes for the chart. Note: The order of fields specified must correspond to the number and order specified by the <code>SetDataYAxis</code> method.

Returns

None.

Example

```
&oChart.SetDataMarkerSize(QE_CHART_NPARKS.QE_CHART_MARKERSIZ);
```

Related Topics

- [SetDataLabel method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataSeries method: Chart class

Syntax

```
SetDataSeries(Record_Name.Field_Name)
```

Description

Use the `SetDataSeries` method to specify the name of the field containing the series values. Every distinct value in this field is considered a unique series.

The series is plotted in the order given by the record.

By default, the legend is populated by the value of this field.

If this value is Null, the system assumes there is only one series to plot.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the series values for the chart.

Returns

None.

Example

```
&MYCHART.SetDataSeries(MYRECORD.MYSERIES);
```

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataURLs method: Chart class

Syntax

```
SetDataURLs(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataURLs method to specify a URL to be launched when a data point is clicked in the chart. The URL for each point must be a fully formed URL specified as a string. For example:

```
http://example.org/index.htm
```

The IsDrillable property must be set to True to enable clicking on data points within the chart.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the URLs for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the SetDataYAxis method.

Returns

None.

Example

```
&oChart.IsDrillable = True;  
&oChart.SetDataURLs(PB_CHART_RECORD.PB_CHART_DESC);
```

Related Topics

- [IsDrillable property: Chart class](#)

SetDataXAxis method: Chart class

Syntax

```
SetDataXAxis(Record_Name.Field_Name)
```

Description

Use the SetDataXAxis method to specify the groups along the x-axis.

If this value is not set or Null, the y values are plotted along the x-axis in groups labeled by their order number.

The order of the data is plotted in the order of the data in the record.

By default, the labels along the x-axis are populated by the value of this field.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the data for the x-axis for the chart.


Returns

None.

Example

```
&cChart = GetChart(PB_CHART_DUMREC.PB_CHART_FIELD);  
  
&cChart.SetData(Record.PB_CHART_RECORD);  
&cChart.SetDataSeries(PB_CHART_RECORD.PB_CHART_PRODUCT);  
&cChart.SetDataXAxis(PB_CHART_RECORD.PB_CHART_REGION);  
&cChart.SetDataYAxis(PB_CHART_RECORD.PB_CHART_SALES);
```

In the following example, the y-axis is set to a numeric amount, while the x-axis is set to the region:

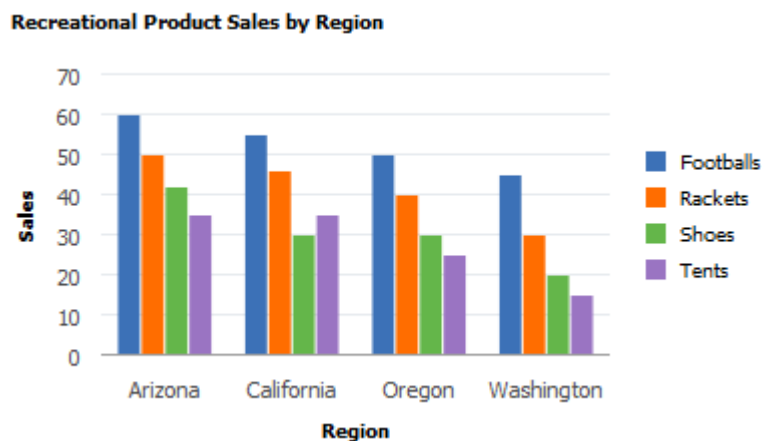

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetData method: Chart class](#)

SetDataYAxis method: Chart class

Syntax

```
SetDataYAxis(Record_Name.Field_Name1, ...)
```

Description

Use the SetDataYAxis to specify the data to plot in the chart. The y-axis is always considered the data axis.

Note

For a funnel chart, you can alternatively use the SetFunnelDataActual method to specify this data.

You can pass more than one field to the SetDataYAxis method to specify more than one data series for a chart. Each field passed into SetDataYAxis will result in one data series in the chart. This methodology is an alternative to using the SetDataSeries method to specify more than one data series. See [Creating and Using Data Series with Charts](#) for more information.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the data values for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the SetDataYAxis method.

Returns

None.

Example1

Consider the following table containing chart data. This data is organized so that a single column (Amount) is passed to SetDataYAxis and Account Type is passed to SetDataSeries:

Account Name	Year	Account Type	Amount	URL	Chart Color	Glyphscale
Revenues	2010	Actual	8200000	http://www.nps.gov/ak/index.htm	1	1

Account Name	Year	Account Type	Amount	URL	Chart Color	Glyphscale
Revenues	2010	Budgeted	7600000	http://www.nps.gov/as/index.htm	5	3
Revenues	2010	Forecast	8100000	http://www.nps.gov/az/index.htm	8	5
Revenues	2011	Actual	8300000	http://www.nps.gov/ca/index.htm	1	1
Revenues	2011	Budgeted	7650000	http://www.nps.gov/co/index.htm	5	3
Revenues	2011	Forecast	7400000	http://www.nps.gov/ct/index.htm	8	5
Revenues	2012	Actual	8450000	http://www.nps.gov/fl/index.htm	1	1
Revenues	2012	Budgeted	8000000	http://www.nps.gov/ga/index.htm	5	3
Revenues	2012	Forecast	6500000	http://www.nps.gov/gu/index.htm	8	5

However, in the preceding table, there is a considerable amount of redundant data that needs to be passed to the Chart object to create a chart. For the same account there are nine rows of data; and for each year, much of the data is repeated.

Now, consider the same data reorganized as three rows. (For ease of viewing, the data has been split into two tables.)

Chart data part 1:

Account Name	Year	Actual Amount	Budget Amount	Forecast Amount	URL Actual	URL Budget	URL Forecast
Revenues	2010	8200000	7600000	8100000	<URL_A>	<URL_B>	<URL_F>
Revenues	2011	8300000	7650000	7400000	<URL_A>	<URL_B>	<URL_F>
Revenues	2012	8450000	8000000	6500000	<URL_A>	<URL_B>	<URL_F>

Chart data part 2:

Account Name	Year	Actual Color	Budget Color	Forecast Color	Glyphscale	Glyphscale	Glyphscale
Revenues	2010	1	5	8	1	3	5
Revenues	2011	1	5	8	1	3	5
Revenues	2012	1	5	8	1	3	5

Since the `SetDataYAxis` method now allows you to specify multiple `RECORD.FIELD` parameters, you can specify data from multiple columns from the same data record. Doing so reduces the need to have duplicate data in row format. The following PeopleCode program could be used to display the preceding data:

```
rem Initialize the chart;
&Chart = GetChart(QE_COL_MULTIWRK.QE_CHART_FIELD);
&Chart.Reset();

rem Call function to check the chart type;
&Chart.Type = %ChartType_2DBar;

rem Set chart data record;
&Chart.SetData(Record.QE_COL_MULTI);

rem Set the x-axis;
&Chart.SetDataXAxis(QE_COL_MULTI.LY_YEARS);

rem Set multiple y-axis data columns;
&Chart.SetDataYAxis(QE_COL_MULTI.LY_AMOUNT_ACTUAL,
QE_COL_MULTI.LY_AMOUNT_BUDGET, QE_COL_MULTI.LY_AMOUNT_FORECAST);

rem Set multi y-axis colors;
&Chart.SetDataColor(QE_COL_MULTI.LY_CHART_COLOR_1,
QE_COL_MULTI.LY_CHART_COLOR_2, QE_COL_MULTI.LY_CHART_COLOR_3);

rem Set multi-column item size;
&Chart.SetDataZAxis(QE_COL_MULTI.LY_CHART_GLYPHSCL1,
QE_COL_MULTI.LY_CHART_GLYPHSCL2, QE_COL_MULTI.LY_CHART_GLYPHSCL3);

rem Need labels for all y columns, which now act like series here;
&Chart.SetSeriesLabels(CreateArray("Actual", "Budgeted", "Forecast"));


&Chart.MainTitle = "Multi Columns Y Axis Chart";
&Chart.XAxisTitle = "Year";
&Chart.YAxisTitle = "Revenue";

rem Set the chart legend;
&Chart.HasLegend = True;
&Chart.LegendPosition = %ChartLegend_Bottom;

&Chart.IsDrillable = True;
&Chart.SetDataURLs(QE_COL_MULTI.LY_CHRT_URL_1, QE_COL_MULTI.LY_CHRT_URL_2,
QE_COL_MULTI.LY_CHRT_URL_3);
```


The preceding PeopleCode would produce the following chart:

Multi Columns Y Axis Chart

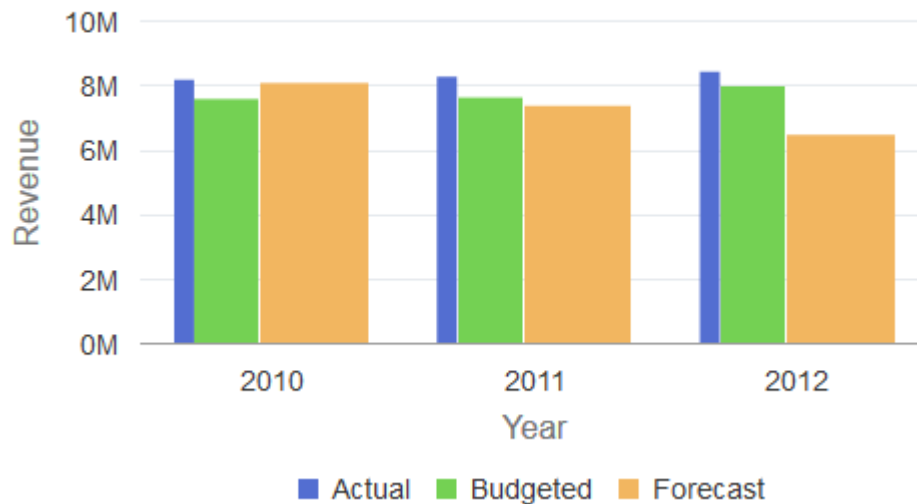

If the `SetDataZAxis` method is commented out of the preceding PeopleCode, the following chart with equal width bars is produced instead: `rem &Chart.SetDataZAxis(QE_COL_MULTI.LY_CHART_GLYPHSCL1, QE_COL_MULTI.LY_CHART_GLYPHSCL2, QE_COL_MULTI.LY_CHART_GLYPHSCL3);`

Multi Columns Y Axis Chart

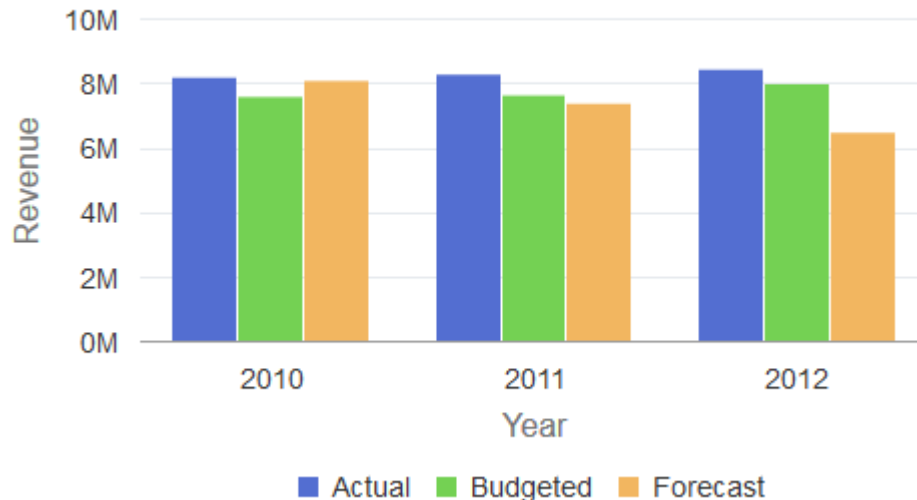


Example2

If you want to plot a specific data series differently from the other series, you can use the `Series` class. The `Series` class is used in conjunction with the `Chart` class to override the default chart type (as defined by the `Type` property for the `Chart` object) for selected members of the data series. See [Using the Series Class](#) for more information on how to use the `Series` class to override the default chart type.

The addition of the following code excerpt at the end of the preceding PeopleCode program allows the forecast data to be plotted as a line chart instead of as a bar: `Local Series &S1;`

```
&S1 = GetSeries(); &S1.Name = "Forecast"; &S1.Type = %SeriesType_Line;
&Chart.SetSeries(CreateArray(&S1));
```

Multi Columns Y Axis Chart

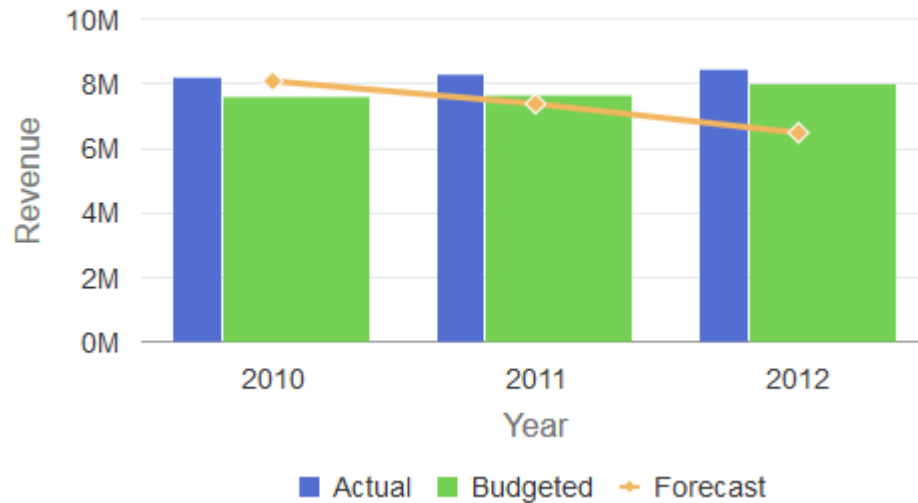

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetData method: Chart class](#)
- [SetFunnelDataActual method: Chart class](#)
- [Creating and Using Data Series with Charts](#)

In PeopleSoft applications, chart data series are a grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could be a series. Generally, every series in a chart has a distinct color. You can have more than one series in a chart for comparison. Each line in a line chart represents one series.

- [Using the Series Class](#)

The Series class is used in conjunction with the Chart class to override the default chart type (as defined by the Type property for the Chart object) for selected members of the data series. (The field representing the data series is specified using the SetDataSeries method.) Using the Series class allows you to render more than one chart type simultaneously.

SetDataZAxis method: Chart class

Syntax

```
SetDataZAxis(Record_Name.Field_Name)
```

Description

Use the SetDataZAxis method to specify a field that contains numerical data defining the size of each data point in a bubble chart or the width of the bar in a bar chart (or the height of the bar in a horizontal bar chart).

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and the field on that record that contains numerical data defining the size of each data point.

Returns


None.

Example

```
&oChart.SetDataZAxis(QE_CHART_NPARKS.QE_CHART_Z);
```


Because no z-axis data is specified for the following stacked horizontal bar chart, the height of each bar is the same.

Visiting National Parks

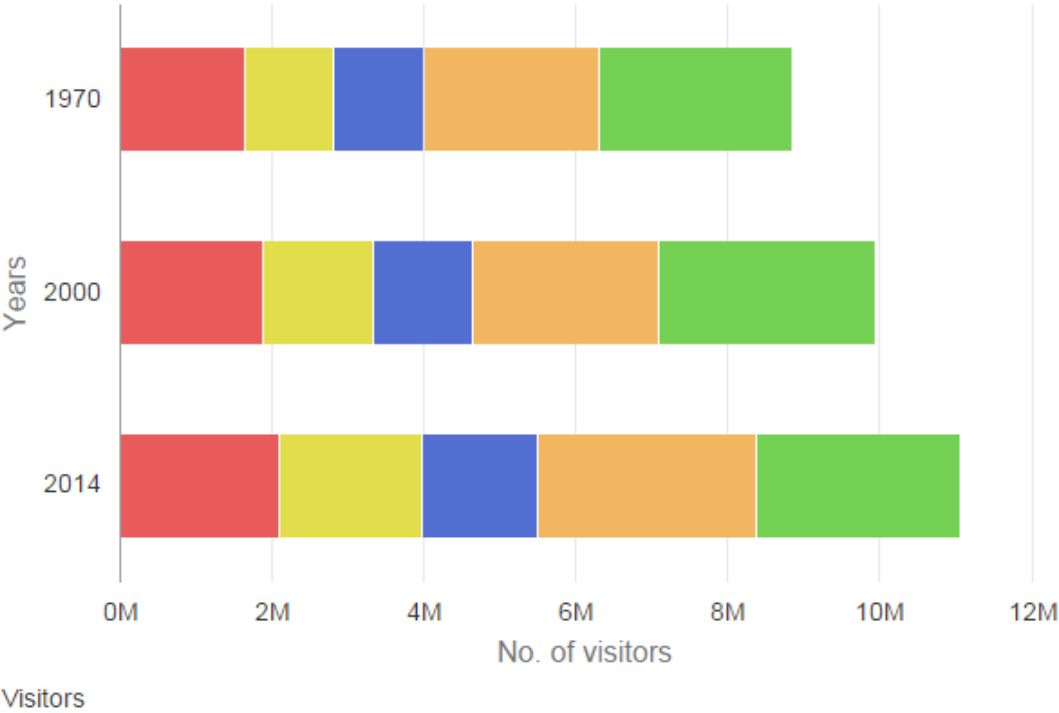

Because z-axis data is specified for the following stacked horizontal bar chart, the height of each bar varies according to the data value.

Visiting National Parks

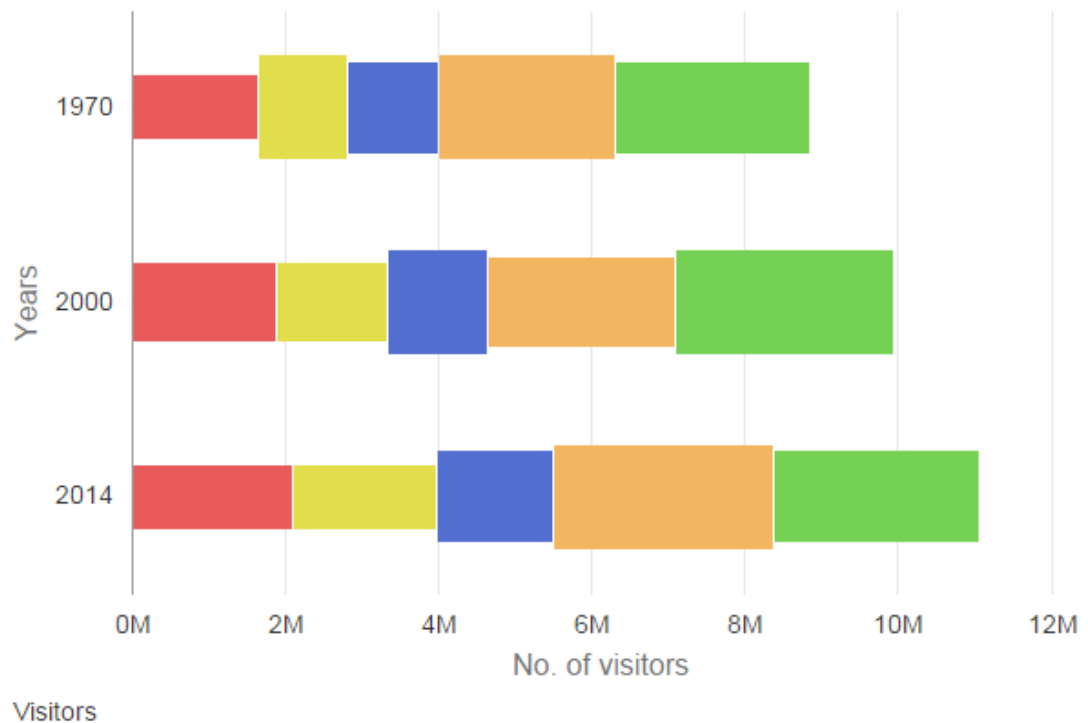

Related Topics

- [SetDataYAxis method: Chart class](#)

SetExplodedSectorsArray method: Chart class

Syntax

SetExplodedSectorsArray (&Array)

Description

Use the SetExplodedSectorsArray method to specify the sectors in a pie chart that you want exploded. Specify a one-dimensional array of type integer to specify which sectors to explode. This is an optional method. The default is no sectors are exploded.

Sector numbers correspond to the rows of data used to generate the chart.

The PIECHARTSEGMENTEXPLOSIONDISTANCE style class in the PSCHARTSTYLE_FREEFORM and in the PSCHARTSTYLE_TANGERINE_FREEFORM style sheets controls the explode offset for all pie chart sectors. The explode offset is expressed as a proportion of the pie radius. This style class is delivered with a default value. If you want exploded segments displayed farther from the pie chart center, adjust the value up; if you want segments displayed closer to the center of the pie chart, adjust the value down. We recommend using a value for PIECHARTSEGMENTEXPLOSIONDISTANCE between 0 and 100. The default in PSCHARTSTYLE_FREEFORM is 40 and in PSCHARTSTYLE_TANGERINE_FREEFORM it is 100.

Parameters

Parameter	Description
<i>&Array</i>	Specify an already instantiated one-dimensional array of number. This array lists the sector numbers that will be exploded. Sector numbers must be integer values. The default is no sectors are exploded.


Returns

None.

Example

```
Local array of number &ExplodedArray;  
&ExplodedArray = CreateArray(1,2,3,4,5)  
&cChart.SetExplodedSectorsArray(&ExplodedArray);
```

The following example shows an exploded 2D pie chart:

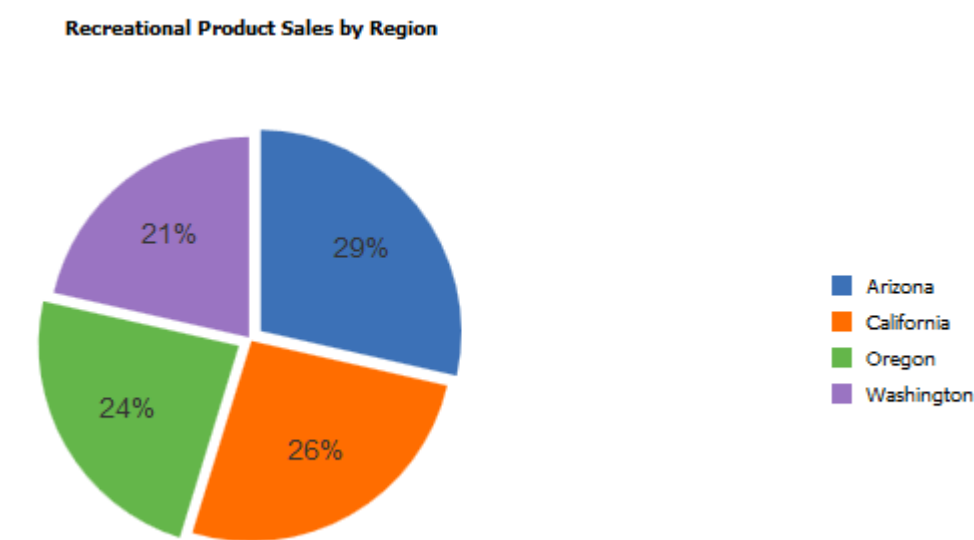

SetFunnelDataActual method: Chart class

Syntax

`SetFunnelDataActual(Record_Name.Field_Name)`

Description

Use the `SetFunnelDataActual` method to specify a field that contains the actual numeric data for the funnel chart. Alternatively, this data can be specified using the `SetDataYAxis` method. This data is required for a funnel chart, and must be specified by one of these two methods.

The target data for a funnel chart can be specified in either of these ways:

- Using the `SetFunnelDataTarget` method to specify a field. In this way, the target data can vary for each data point.
- Using the `FunnelPercentMeasure` property. When this property is `True`, a default target value of 100.00 is used (which overrides any target data is specified by the `SetFunnelDataTarget` method).

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the data for the y-axis for the funnel chart.

Returns

None.

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetFunnelDataTarget method: Chart class](#)
- [FunnelPercentMeasure property: Chart class](#)

SetFunnelDataTarget method: Chart class

Syntax

```
SetFunnelDataTarget(Record_Name.Field_Name)
```

Description

Use the `SetFunnelDataTarget` method to specify a field that contains the target numeric data for the funnel chart. Target data is optional. However, when it is specified, the field must reside on the same record definition as specified with the `SetFunnelDataActual` method.

Note

If the `FunnelPercentMeasure` property is `True`, then any specified target data is ignored.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the optional target data for the funnel chart.

Returns

None.

Example

In the following example, the actual and target data for the funnel chart come from the same record definition, which is a required condition for using the `SetFunnelDataTarget` method:

```
&oChart.SetFunnelDataActual(CHART_RECORD.CHART_SALES);  
&oChart.SetFunnelDataTarget(CHART_RECORD.CHART_X_NUMERIC);  
rem &oChart.FunnelPercentMeasure = True;
```

Related Topics

- [FunnelPercentMeasure property: Chart class](#)

SetGlyphArray method: Chart class

Description

This method has been deprecated and is ignored.

SetLegend method: Chart class

Syntax

```
SetLegend(&Array_of_String)
```

Description

Use the `SetLegend` method to specify alternative legends. By default, the legends are populated from the record field specified with `SetDataSeries`.

This method is used to write both the overlay legend and the series legend. The labels are overwritten in the order of elements in the array, that is, the first element overwrites the first series, the second overwrites the second, and so on, with the last element in the array overwriting the overlay legend. There can be more than one series in an overlay.

If you do not specify an element for an array (that is, a blank or a null) then no legend is listed for that series.

Note

Default label text is not automatically translated. If you set your own labels, be sure to use translated text, such as message catalog entries.

Note

Legends are not available for funnel charts. Therefore, this method is not applicable for a funnel chart.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string, containing the text that you want to use for the legend.

Returns

None.

Example

The following example displays a legend containing only the overlay.

```
&LegendArray = CreateArray("", "", "Revenue");  
&MyChart.SetLegend(&LegendArray);
```

Related Topics

- [SetDataSeries method: Chart class](#)

SetOldData method: Chart class

Syntax

```
SetOldData({Record_Name | &Rowset})
```

Description

Use the SetOldData method to specify where the data for the overlay is coming from.

If you make a change to the underlying data of a chart, call the SetOldData method again to update the chart.

There are no default values for the overlay data. You must specify the data.

You can specify two different y-axis fields, but you must make certain that different data plotted against the same axis makes sense. For example, while plotting two currency amounts would work technically—plotting currency amounts against number of units sold and sharing the same axis—would not look correct.

Parameters

Parameter	Description
<i>Record_Name</i>	Specify the name of a record to be used to populate the overlay of the chart with data.
<i>&Rowset</i>	Specify the name of an already instantiated rowset to populate the overlay of the chart with data.

Returns

None.

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetDataYAxis method: Chart class](#)
- [SetData method: Chart class](#)

SetOLDataSeries method: Chart class

Syntax

```
SetOLDataSeries(Record_Name.Field_Name)
```

Description

Use the SetOLDataSeries method to specify the name of the field containing the overlay series values. Every distinct value in this field is considered a unique series.

The series is plotted in the order given by the rows in the record.

If this value is Null, the system assumes there is only one series to plot.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the series values of the overlay for the chart.

Returns

None.

Related Topics

- [SetDataSeries method: Chart class](#)

SetOldDataXAxis method: Chart class

Syntax

```
SetOldDataXAxis(Record_Name.Field_Name)
```

Description

Use the SetOldDataXAxis method to specify the groups along the x-axis if the axis is non-numeric for the overlay.

If the x-axis is numeric, this method is used to give the position of the points along the axis. Only discrete values are supported for the x-axis.

If this value is Null, the y values are plotted along the x-axis in groups labeled by their order number.

The order of the data is plotted in the order of rows in the record.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the data for the x-axis for the overlay of the chart.

Returns

None.

SetOldDataYAxis method: Chart class

Syntax

```
SetOldDataYAxis(Record_Name.Field_Name)
```

Description

Use the SetOldDataYAxis to specify the data to plot for the overlay of the chart.

This value must always be numeric.

This method has no default value.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record, and the field on that record, that contains the data for the overlay of the chart.

Returns

None.

Related Topics

- [SetDataXAxis method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetReferenceArea method: Chart class

Syntax

```
SetReferenceArea(&Array_of_RefAreas)
```

Description

Use the SetReferenceArea method to specify one or more reference areas for the chart.

Parameters

Parameter	Description
<i>&Array_of_RefAreas</i>	Specify an already instantiated array of ReferenceArea objects as the reference areas for this chart.

Returns

None.

Related Topics

- [Creating and Using Data Series with Charts](#)
In PeopleSoft applications, chart data series are a grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could be a series. Generally, every series in a chart has a distinct color. You can have more than one series in a chart for comparison. Each line in a line chart represents one series.
- [ReferenceArea Class Properties](#)
These properties are used by the ReferenceArea class. The properties are described in alphabetic order.

SetReferenceLine method: Chart class

Syntax

```
SetReferenceLine(&Array_of_RefLines)
```

Description

Use the SetReferenceLine method to specify one or more reference lines for the chart.

Parameters

Parameter	Description
<i>&Array_of_RefLines</i>	Specify an already instantiated array of ReferenceLine objects as the reference lines for this chart.

Returns

None.

Related Topics

- [Using the ReferenceLine Class](#)
The ReferenceLine class is used in conjunction with the Chart class to display colored lines to be drawn with the chart based on numeric values along a chart axis. For each reference line, you would create a separate instance of the ReferenceLine class.
- [ReferenceLine Class Properties](#)
These properties are used by the ReferenceLine class. The properties are described in alphabetic order.

SetSelectedData method: Chart class

Syntax

```
SetSelectedData(Record_Name.Field_Name)
```

Description

Use the SetSelectedData method to redraw a chart while maintaining which data items were previously selected by the user. The specified field must be a single-character String storing the value Y or N.

The information on which data items have been selected by the user are returned in the [aSelections property: ChartClientState class](#) property of the ChartClientState class as an array of String.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and field that indicates whether this data item is selected as one of these two String values: • Y • N

Returns

None.

Example

```
&oChart.SetSelectedData(QE_CHARTPROPS.QE_SELECTED);
```

Related Topics

- [aSelections property: ChartClientState class](#)
- [DataSelectionMode property: Chart class](#)
- [Selecting and Highlighting Data Points](#)
Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

SetSeries method: Chart class

Syntax

`SetSeries(&Array_of_Series)`

Description

Use the SetSeries method to specify one or more Series objects for the chart to override the default chart type (as defined by the Type property for the Chart object) for selected members of the data series.

Parameters

Parameter	Description
<i>&Array_of_Series</i>	Specify an already instantiated array of Series objects as the overriding chart types for this chart.

Return

None.

Example

```
&all_series = CreateArray(&series1, &series2, &series3, &series4);  
  
&cChart.SetSeries(&all_series);
```

Related Topics

- [Using the Series Class](#)
The Series class is used in conjunction with the Chart class to override the default chart type (as defined by the Type property for the Chart object) for selected members of the data series. (The field representing the data series is specified using the SetDataSeries method.) Using the Series class allows you to render more than one chart type simultaneously.
- PeopleCode Language Reference: GetSeries function
- [Series Class Properties](#)
In this section, the Series class properties are presented in alphabetical order.

SetSeriesLabels method: Chart class

Syntax

```
SetSeriesLabels(&Array_of_SeriesLabels)
```

Description

Use the SetSeriesLabels method to method to set the label for each series, which are specified by the SetDataYAxis method. These labels are displayed in the legend and tooltips.

Parameters

Parameter	Description
<i>&Array_of_SeriesLabels</i>	Specify an already instantiated array of String values specifying the label for each series. Note: The order of labels specified must correspond to the field order specified by the SetDataYAxis method.

Returns

None.

Example

```
&oChart.SetSeriesLabels(CreateArray("Actual", "Budgeted", "Forecast",  
"Quantity"));
```

Related Topics

- [SetDataYAxis method: Chart class](#)

SetSvgGradientColor1 method: Chart class

Syntax

```
SetSvgGradientColor1(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientColor1 method to assign the first color for the <stop> SVG element. The field must be a string storing a number or a constant that specifies the color you want to use. Value will be ignored if corresponding SetSvgGradientOffset1() is not called to set the offset or a value is not provided in the data row for a specific data item.

Note

The SetSvgGradientColor1 method can be used for bar charts only.

The String value of this field must be one of these values:

Value	Description
Blank	Default series color.
0	Black
1	Blue
2	Cyan
3	Dark gray
4	Gray
5	Green
6	Light gray
7	Magenta
8	Orange
9	Pink
10	Red
11	White
12	Yellow
13	Red-orange
14	Yellow-green
15	Blue-violet
16	Purple
17	Yellow-orange

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the color value for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientColor1(QE_CHART_NP_REC.QE_CHART_GCOLOR1_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientColor2 method: Chart class](#)
- [SetSvgGradientColor3 method: Chart class](#)
- [SetSvgGradientColor4 method: Chart class](#)

SetSvgGradientColor2 method: Chart class

Syntax

```
SetSvgGradientColor2(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientColor2 method to assign the second color for the <stop> SVG element. The field must be a String storing a number or a constant that specifies the color you want to use. Value will be ignored if corresponding SetSvgGradientOffset2() is not called to set the offset or a value is not provided in the data row for a specific data item.

Note

The SetSvgGradientColor2 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the color value for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientColor2(QE_CHART_NP_REC.QE_CHART_GCOLOR2_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientColor1 method: Chart class](#)
- [SetSvgGradientColor3 method: Chart class](#)
- [SetSvgGradientColor4 method: Chart class](#)

SetSvgGradientColor3 method: Chart class

Syntax

```
SetSvgGradientColor3(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientColor3 method to assign the third color for the <stop> SVG element. The field must be a String storing a number or a constant that specifies the color you want to use. Value will be ignored if corresponding SetSvgGradientOffset3() is not called to set the offset or a value is not provided in the data row for a specific data item.

Note

The SetSvgGradientColor3 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the color value for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientColor3(QE_CHART_NP_REC.QE_CHART_GCOLOR3_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientColor1 method: Chart class](#)
- [SetSvgGradientColor2 method: Chart class](#)
- [SetSvgGradientColor4 method: Chart class](#)

SetSvgGradientColor4 method: Chart class

Syntax

```
SetSvgGradientColor4(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientColor4 method to assign the fourth color for the <stop> SVG element. The field must be a String storing a number or a constant that specifies the color you want to use. Value will be ignored if corresponding SetSvgGradientOffset4() is not called to set the offset or a value is not provided in the data row for a specific data item.

Note

The SetSvgGradientColor4 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the color value for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientColor4(QE_CHART_NP_REC.QE_CHART_GCOLOR4_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientColor1 method: Chart class](#)
- [SetSvgGradientColor2 method: Chart class](#)
- [SetSvgGradientColor3 method: Chart class](#)

SetSvgGradientOffset1 method: Chart class

Syntax

```
SetSvgGradientOffset1(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientOffset1 method to set the first offset of the <stop> SVG element which indicates where the gradient color stop is placed. The gradient color is set via SetSvgGradientColor1 method. The field must be a string storing the numeric value in percentage for the gradient offset. No <stop> SVG element will be created for the data item if corresponding SetSvgGradientColor1 is not called to set the color or a value is not provided in the data row for a specific data item.

Note

The SetSvgGradientOffset1 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the offset value for the data items for the chart. The record field must be defined as character data type field. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientOffset1(QE_CHART_NP_REC.QE_CHART_OFFSET1_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientOffset2 method: Chart class](#)
- [SetSvgGradientOffset3 method: Chart class](#)
- [SetSvgGradientOffset4 method: Chart class](#)

SetSvgGradientOffset2 method: Chart class

Syntax

```
SetSvgGradientOffset2(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientOffset2 method to set the second offset of the <stop> SVG element which indicates where the gradient color stop is placed. The gradient color is set via SetSvgGradientColor2 method. The field must be a string storing the numeric value in percentage for the gradient offset. No <stop> SVG element will be created for the data item if corresponding SetSvgGradientColor2 is not called to set the color or value is not provided in the data row for a specific data item. Value will be ignored if SetSvgGradientOffset1() is not called or no value is provided.

Note

The SetSvgGradientOffset2 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the offset value for the data items for the chart. The record field must be defined as character data type field. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientOffset2(QE_CHART_NP_REC.QE_CHART_OFFSET2_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientOffset1 method: Chart class](#)
- [SetSvgGradientOffset3 method: Chart class](#)
- [SetSvgGradientOffset4 method: Chart class](#)

SetSvgGradientOffset3 method: Chart class

Syntax

```
SetSvgGradientOffset3(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientOffset3 method to set the third offset of the <stop> SVG element which indicates where the gradient color stop is placed. The gradient color is set via the SetSvgGradientColor3 method. The field must be a string storing the numeric value in percentage for the gradient offset. No <stop> SVG element will be created for the data item if corresponding SetSvgGradientColor3 is not called to set the color or value is not provided in the data row for a specific data item. Value will be ignored if SetSvgGradientOffset1() is not called or no value is provided.

Note

The SetSvgGradientOffset3 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the offset value for the data items for the chart. The record field must be defined as character data type field. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientOffset3(QE_CHART_NP_REC.QE_CHART_OFFSET3_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientOffset1 method: Chart class](#)
- [SetSvgGradientOffset2 method: Chart class](#)
- [SetSvgGradientOffset4 method: Chart class](#)

SetSvgGradientOffset4 method: Chart class

Syntax

```
SetSvgGradientOffset4(Record_Name.Field_Name1,  
...)
```

Description

Use the SetSvgGradientOffset4 method to set the fourth offset of the <stop> SVG element which indicates where the gradient color stop is placed. The gradient color is set via the SetSvgGradientColor4 method. The field must be a string storing the numeric value in percentage for the gradient offset. No <stop> SVG element will be created for the data item if corresponding SetSvgGradientColor4 is not called to set the color or value is not provided in the data row for a specific data item. Value will be ignored if SetSvgGradientOffset1() is not called or no value is provided.

Note

The SetSvgGradientOffset4 method can be used for bar charts only.

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i>	Specify the name of the record and one or more fields on that record that contain the offset value for the data items for the chart. The record field must be defined as character data type field. Note: The number and order of fields specified must correspond to the order specified by the <i>SetDataYAxis</i> method.

Returns

None.

Example

```
&Chart.SetSvgGradientOffset4(QE_CHART_NP_REC.QE_CHART_OFFSET4_S);
```

Related Topics

- [SetDataYAxis method: Chart class](#)
- [SetSvgGradientOffset1 method: Chart class](#)
- [SetSvgGradientOffset2 method: Chart class](#)
- [SetSvgGradientOffset3 method: Chart class](#)

SetToolTipLabels method: Chart class

Syntax

```
SetToolTipLabels(&Array_of_ToolTipLabels)
```

Description

Use the SetToolTipLabel method to display custom tooltips (also referred to as “data hints” or “hover text”) on charts thereby overriding the default tooltips that are automatically created from the chart data.

Parameters

Parameter	Description
<i>&Array_of_ToolTipLabels</i>	Specify an already instantiated array of ToolTipLabel objects as the tool tips for this chart.

Returns

None.

Example

```
&tooltip_labels = CreateArray(&label1, &label2, );  
  
&cChart.SetToolTipLabels(&tooltip_labels);
```

Related Topics

- [Using the ToolTipLabel Class](#)
The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on chart data points thereby overriding the default tooltips that are automatically created from the chart data.
- [ToolTipLabel Class Properties](#)
In this section, the ToolTipLabel class properties are presented in alphabetical order.
- PeopleCode Language Reference: GetToolTip function

SetXAxisLabels method: Chart class

Syntax

```
SetXAxisLabels(&Array_of_String)
```

Description

Use the SetXAxisLabels method to specify an array of labels for the x-axis. By default, the labels are populated from the record field specified by SetDataXAxis. Labels specified with SetXAxisLabels overwrite the default labels.

Note

Default label text is not automatically translated. If you set your own labels, be sure to use translated text, such as message catalog entries.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string that contain the labels that you want to use for the x-axis.

Returns

None.

Related Topics

- [SetDataXAxis method: Chart class](#)
- [Creating a Chart Using the Chart Class](#)
This section demonstrates how to create a simple chart based on the Chart class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.
- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

SetYAxisColumnType method: Chart class

Syntax

```
SetYAxisColumnType(&Array_of_Y_Axes)
```

Description

Use the SetYAxisColumnType method to assign fields to either the primary y-axis or the secondary y-axis.

Parameters

Parameter	Description
<i>&Array_of_Y_Axes</i>	Specify an already instantiated array of numeric values. Note: The order of fields specified must correspond to the number and order specified by the SetDataYAxis method.

You can specify either an Integer or constant value for the elements of this array. The values are:

Numeric Value	Constant Value	Description
1	%Axis_Y	Display this field on the primary y-axis.
2	%Axis_Y2	Display this field on the secondary y-axis.

Returns

None.

Example

```
&oChart.SetYAxisColumnType(CreateArray(%Axis_Y, %Axis_Y, %Axis_Y, %Axis_Y2));
```

Related Topics

- [SetDataYAxis method: Chart class](#)

SetYAxisLabels method: Chart class

Syntax

```
SetYAxisLabels((&Array_of_String))
```

Description

Use the SetYAxisLabels method to specify an array of labels for the y-axis. Labels specified with SetYAxisLabels overwrite the default labels.

If the greatest y-axis value is less than ten, the default y-axis labels are given a decimal place. If the greatest y-axis value is greater than or equal to ten, the default y-axis labels are displayed as integers.

Note

Default label text is not automatically translated. If you set your own labels, be sure to use translated text, such as message catalog entries.

If you set the labels yourself, you should set YAxisTicks and YAxisMax because you no longer have numbers that correlate to the data points. YAxisTick is used to calculate the increment of each major tick mark. If YAxisTick is not set, tick mark increment will be set to 1.

Note

The SetYAxisLabels method does not work with negative y-axis value.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string that contain the labels that you want to use for the y-axis.

Returns

None.

Related Topics

- [SetDataXAxis method: Chart class](#)
- [YAxisMax property: Chart class](#)
- [YAxisTicks property: Chart class](#)
- [Creating a Chart Using the Chart Class](#)

This section demonstrates how to create a simple chart based on the Chart class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

Chart Class Properties

These properties are used by the Chart class. The properties are described in alphabetic order.

AdditionalStyleSuffix property: Chart class

Description

Note

The AdditionalStyleSuffix property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationDuration property: Chart class

Description

Note

The AnimationDuration property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationType property: Chart class

Description

Note

The AnimationType property is no longer used in PeopleTools 8.57 and will be ignored.

AspectRatio property: Chart class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatio is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&cChart.AspectRatio = 0.8;
```

Related Topics

- [Height property: Chart class](#)
- [Width property: Chart class](#)

- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

AspectRatioPortrait property: Chart class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width in Portrait mode.

If the aspect ratio portrait is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatioPortrait is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&cChart.AspectRatioPortrait = 0.56
```

Related Topics

- [Height property: Chart class](#)
- [Width property: Chart class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

ChartURL property: Chart class

Description

Use this property to specify a URL to be launched when the chart background is clicked. The URL must be a fully formed URL specified as a string. For example:

```
http://example.org/index.htm
```

The IsChartDrillable property must be set to True to enable clicking on the chart background.

Example

```
&oChart.IsChartDrillable = True;  
&oChart.ChartURL = "http://example.org/index.htm";
```

Related Topics

- [IsChartDrillable property: Chart class](#)

DataSelectionMode property: Chart class

Description

Use this property to specify an Integer value that indicates the data selection mode for this Chart instance.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
0	%Chart_DataSelection_None Note: %Chart_DataSelection_None is the default value.	Data selection is not enabled for this Chart instance.
1	%Chart_DataSelection_Single	Only one data point at a time may be selected on this Chart instance.
2	%Chart_DataSelection_Multiple	Multiple data points may be selected on this Chart instance.

This property is read/write.

Example

```
&oChart.DataSelectionMode =%Chart_DataSelection_Single;
```

Related Topics

- [SetSelectedData method: Chart class](#)
- [Selecting and Highlighting Data Points](#)
Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

DataStartRow property: Chart class

Description

This property sets or returns the row number (after any preprocessing) at which to start plotting. This is useful when you have many rows of data in a rowset, and you want to start at a particular row. This can also be useful for creating your own 'scrolling' effect, by specifying both the start row and how many rows to be displayed (by using the DataWidth property).

If this property is not set, then the value is 1.

This property is read/write.

Related Topics

- [DataWidth property: Chart class](#)

DataWidth property: Chart class

Description

This property returns or sets the number of rows to plot for a series. The starting point for the number of rows is set with the DataStartRow property. If the DataWidth property value is not set, then the width is from the DataStartRow to the last element in the rowset. If the property value is less than zero, then it will automatically be set to one.

This property is read/write.

Example

Suppose your rowset returned 400 rows. You wouldn't want all 400 to display in your chart. Instead, you'd pick a subset of those rows. The row to start with is set with DataStartRow, while how many rows to display is set with DataWidth.

The following code could be used with a push button connected with a chart. The push button enables the next set of data to appear with the chart.

You do not need to refresh after setting this property. When a method or property is used, the chart is automatically refreshed.

```
Local Chart &MyChart;  
  
&MyChart = GetChart(ChartRec.DisplayField);  
&Start = &MyChart.DataStartRow;  
/* display the next 20 rows of data */  
&MyChart.DataStartRow = &Start + 20;  
&MyChart.DataWidth = 20;
```

Related Topics

- [DataStartRow property: Chart class](#)

FooterAlignment property: Chart class

Description

Use this property to specify an Integer value indicating the alignment for the footer text.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
1	%ChartTextAlign_Center	Center the displayed text.
2	%ChartTextAlign_End	Right-align the displayed text.

Numeric Value	Constant Value	Description
3	%ChartTextAlign_Start Note: %ChartTextAlign_Start is the default value.	Left-align the displayed text.

This property is read/write.

Related Topics

- [FootNote property: Chart class](#)
- [FooterStyle property: Chart class](#)

FooterStyle property: Chart class

Description

Use this property to specify the CSS style string that defines the style of the footer text.

This property is read/write.

Example

```
&oChart.FooterStyle = "color:#f00;font-size:15px";
```

Related Topics

- [FooterAlignment property: Chart class](#)
- [FootNote property: Chart class](#)

FootNote property: Chart class

Description

Use this property to specify the text for the footer for the chart as a String value. The footer appears beneath the chart and is aligned by the setting of the FooterAlignment property.

This property is read/write.

Related Topics

- [FooterAlignment property: Chart class](#)
- [FooterStyle property: Chart class](#)

FunnelOrientation property: Chart class

Description

Use this property to specify whether the funnel chart is displayed horizontally or vertically.

You can specify a constant value for this property. Values are:

Constant Value	Description
%Chart_Horizontal	The funnel chart is displayed horizontally.

Constant Value	Description
%Chart_Vertical	The funnel chart is displayed vertically.

The default orientation of the funnel chart is vertical.

This property is read/write.

Example

```
&oChart.FunnelOrientation = %Chart_Horizontal;
```

FunnelPercentMeasure property: Chart class

Description

Use this property to set a Boolean value indicating whether to display the funnel chart data as a percentage of the default target value: 100.00.

Note

If this property is True, then any target data specified by the SetFunnelDataTarget method is ignored.

This property is read/write.

Example

```
&oChart.SetFunnelDataActual(CHART_RECORD.CHART_SALES);  
&oChart.FunnelPercentMeasure = True;
```

Related Topics

- [SetFunnelDataActual method: Chart class](#)
- [SetFunnelDataTarget method: Chart class](#)

HasLegend property: Chart class

Description

Use this property to specify if a legend is displayed with the chart. This property takes a Boolean value: True, if the legend is displayed with the chart, False otherwise.

The default value is False.

This property is read/write.

Note

Legends are not available for funnel charts. Therefore, this property is not applicable for a funnel chart.

HasXAxis property: Chart class

Description

Use this property to specify whether the X-axis title is displayed with the chart.

This property takes a Boolean value: True, if the X-axis title appears with the chart; False otherwise.

The default value is True.

Note

When you set the HasXAxis property to false, in addition to the X-axis title, the following auto-generated text is also suppressed: axis line, tick marks, and tick labels.

This property is read/write.

Example

```
&oChart.HasXAxis = False;
```

Related Topics

- [XAxisTitle property: Chart class](#)

HasYAxis property: Chart class

Description

Use this property to specify whether the Y-axis title is displayed with the chart.

This property takes a Boolean value: True, if the Y-axis title appears with the chart; False otherwise.

The default value is True.

Note

When you set the HasYAxis property to false, in addition to the Y-axis title, the following auto-generated text is also suppressed: axis line, tick marks, and tick labels.

This property is read/write.

Example

```
&oChart.HasYAxis = False;
```

Related Topics

- [YAxisTitle property: Chart class](#)

Height property: Chart class

Description

On a classic page, use this property to specify a Number value indicating the height of the chart in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the chart.

Generally this property is used with charts created for iScripts, to specify the height of the image, before generating the image map. You can also use it to overwrite the height set in Application Designer.

If you try to read this property before setting it, the value returned is zero.

Note

The Height and Width properties must be set to the same value to change the size of a 2D Scatter chart, that is, a chart with the Type property set to %ChartType_2DScatter.

This property is read/write.

Related Topics

- [AspectRatio property: Chart class](#)
- [Width property: Chart class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

HideShowBehavior property: Chart class

Description

Use this property to specify an Integer value that indicates whether the user can toggle the series legend entries to hide or show the corresponding data points for that series.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
0	%ChartHideShow_None	Toggling of the series legend entries is disabled. Note: %ChartHideShow_None is the default value.
1	%ChartHideShow_NoRescale	If the chart displays a legend, the user can toggle the series legend entries to hide or show the corresponding data points for that series and the y-axis will not be rescaled.
2	%ChartHideShow_Rescale	If the chart displays a legend, the user can toggle the series legend entries to hide or show the corresponding data points for that series and the y-axis will be rescaled as necessary.

This property is read/write.

Html property: Chart class

Description

Use this property to retrieve the HTML string required to render the chart within an HTML area on the page. This is useful for rendering a chart on a page that does not have a Chart control but has an HTML area control, or for rendering charts on a tile that uses a content type of HTML area.

Use the CreateObject function, rather than the GetChart function, to instantiate the chart object when intending to use this property. You must call the SetData method and provide an instantiated and populated rowset. The property returns an empty string if the Chart object does not have any data set.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties is used to determine the dimensions of the chart rendered via the returned HTML. If you don't specify these properties, the chart's dimensions automatically fit within the containing element.

This property is read-only.

Example

```
Local Chart &oChart;  
&oChart = CreateObject("Chart");  
  
Local Rowset &rs = CreateRowset(Record.QE_CHART);  
&rs.Fill();  
&oChart.SetData(&rs);  
  
&oChart.SetDataYAxis(QE_CHART.QE_VISITORS);  
&oChart.SetDataXAxis(QE_CHART.QE_YEARS);  
&oChart.SetDataSeries(QE_CHART.QE_PARKNAME);  
&oChart.XAxisTitle = "Years";  
&oChart.YAxisTitle = "No. of visitors";  
&oChart.MainTitle = "National Parks Visitors";  
  
&oChart.Height = 300;  
&oChart.Width = 500;  
  
rem set the HTML area control field value to Chart HTML;  
QE_DYNCHART_WRK.QE_HTMLAREA = &oChart.Html;
```

Related Topics

- [AspectRatio property: Chart class](#)
- [Height property: Chart class](#)
- [Width property: Chart class](#)

ImageMap property: Chart class

Description

This property returns the HTML client-side image map. The image map is what makes the chart interactive.

This property is read-only.

Related Topics

- [Creating PeopleSoft Charts](#)
This section discusses the process of creating charts using any of the PeopleSoft charting classes. Further details can be found in the specific section for each chart class.

IsChartDrillable property: Chart class

Description

Use this property to specify a Boolean value indicating whether the chart background (that is, the entire chart control) is interactive.

If both `IsChartDrillable` and `IsDrillable` are set to `True`, the interactivity depends on where the user clicks on the chart. If the user clicks on a data point within the chart (for example, a bar, a pie segment, a dot, and so on), the interactivity specified by `IsDrillable` is triggered. If the user clicks anywhere else on the chart, the interactivity is specified by either of these two conditions:

- Any FieldChange PeopleCode that is defined on the record field of the chart control.
- The URL specified by the ChartURL property.

This property is read/write.

Related Topics

- [ChartURL property: Chart class](#)
- [IsDrillable property: Chart class](#)

IsColorContrastMode property: Chart class

Description

Use this property to specify a Boolean value indicating whether the color contrast mode for charts is enabled or disabled.

By default, the color contrast mode is enabled for charts.

You can use this property to override the system-wide default. When you use this property to set the color contrast mode for charts, it takes highest precedence.

This property is read/write.

Example

```
&Chart = GetChart(QE_CDEMO_WRK.QE_CHART_NP);  
&Chart.Reset();  
rem set color contrast mode on/off;  
&Chart.IsColorContrastMode = False;  
&Chart.Type = GetChartType();
```

Related Topics

- [Color Contrast Mode for Charts](#)
By default, the adjacent colors in a chart are separated by a gap between the colors and a black border to fulfil accessibility requirements, and this setting is defined by the *PTCOLORCONTRAST* property, which is specified on the Chart Options page.

IsDrillable property: Chart class

Description

Use this property to specify a Boolean value indicating whether the chart is interactive—that is, whether the user can click on (or touch) the chart to trigger an action. The default value is False.

If both IsChartDrillable and IsDrillable are set to True, the interactivity depends on where the user clicks on the chart. If the user clicks on a data point within the chart (for example, a bar, a pie segment, a dot, and so on), the interactivity specified by IsDrillable is triggered. If the user clicks anywhere else on the chart, the interactivity specified by IsChartDrillable is triggered. When IsDrillable is triggered, the source of interactivity on a chart can come from one of two places:

- A URL passed through the chart's SetDataURLs method
- FieldChange PeopleCode on the y-axis data field.

If both a URL is passed through `SetDataURLs` and `FieldChange` `PeopleCode` exists on the y-axis data field, the URL will take precedence over the `PeopleCode`.

Note

The record that contains the `PeopleCode` must be in the component buffer at runtime.

See [Creating a Chart Using the Chart Class](#).

This property is read/write.

Related Topics

- [SetDataURLs method: Chart class](#)
- [IsChartDrillable property: Chart class](#)

IsLineChartLineSmoothing property: Chart class

Description

Use this property to specify a Boolean value indicating whether to display the line chart with smoothed lines. If this property is set to `True`, the lines that connect the data points on the line chart are smoothed, resulting in curved lines. If this property is set to `False`, the lines between the data points are drawn straight.

This property is read/write.

IsPlainImage property: Chart class

Description

Use this property to specify whether the chart is built without interactivity features, such as data hints or drill capability.

If this property is specified as `True`, you will not be able to click on the chart to trigger an event. In addition, the pop-up data hints will not appear when you pass a mouse over the chart. However, you may see a performance improvement if your chart has an extremely complicated image map and you specify this property as `True`.

This property takes a Boolean value: `True` if the chart is built without interactivity, `False` otherwise.

The default value of this property is `False`.

This property is read/write.

IsSplitDualY property: Chart class

Description

Use this property to specify a Boolean value indicating whether a chart with two y-axes will be split and displayed as two charts.

The default value is `False`.

This property is read/write.

Related Topics

- [Creating a Chart with Two Y-Axes](#)

When the values in a chart vary widely from data series to data series, or when you have mixed types of data (for example, both revenue and quantity data), you can plot the additional data series on a second vertical axis referred to as a “secondary y-axis” (or Y2 axis). The scale of the secondary y-axis reflects the values for the associated data series.

IsTrueXY property: Chart class

Description

This property has been desupported and is ignored.

IsXAxisInteger property: Chart class

Description

Specify whether the x-axis will display integers. Set `IsXAxisInteger` to `True` if the x-axis represents integer data, such as the number of people or the number of tasks.

Setting `IsXAxisInteger` to `True` is only applicable to line charts, scatter charts, and bubble charts.

This property takes a Boolean value.

The default value of this property is `False`.

This property is read/write.

IsYAxisInteger property: Chart class

Description

Specify whether the y-axis will display integers. Set `IsYAxisInteger` to `True` if the y-axis represents integer data, such as the number of people or the number of tasks.

`IsYAxisInteger` is not used with pie charts and percentage bar charts.

This property takes a Boolean value.

The default value of this property is `False`.

This property is read/write.

IsY2AxisInteger property: Chart class

Description

Use this property to specify a Boolean value indicating whether the secondary y-axis will display integers. Set `IsY2AxisInteger` to `True` if the secondary y-axis represents integer data, such as the number of people or the number of tasks.

`IsY2AxisInteger` is not used with pie charts and percentage bar charts.

The default value is `False`.

This property is read/write.

LegendPosition property: Chart class

Description

Use this property to specify where the legend should appear, in relationship to the chart. You can specify either a numeric or constant value for this property.

Note

ChartLegend_Separate generates a legend without a chart. The legend takes over the entire charting area.

The values are:

Numeric Value	Constant Value	Description
0	%ChartLegend_Left	Display legend to the left of the chart.
1	%ChartLegend_Right	Display legend to the right of the chart.
2	%ChartLegend_Top	Display legend on top of the chart.
3	%ChartLegend_Bottom	Display legend below the chart.
4	%ChartLegend_Separate	Generate a legend without a chart.

This property is read/write.

LineChartDataGlyphSize property: Chart class

Description

This property has been desupported and is ignored.

Related Topics

- [SetGlyphArray method: Chart class](#)

MainTitle property: Chart class

Description

Use this property to specify the text for the main title of the chart as a String value. The main title appears above the chart is aligned according to the TitleAlignment property.

This property is read/write.

Related Topics

- [TitleAlignment property: Chart class](#)

MinHeight property: Chart class

Description

Use this property to specify a Number value indicating the minimum height of the chart on fluid pages.

This property is read/write.

Example

```
&oChart.MinHeight = 30;
```

Related Topics

- [AspectRatio property: Chart class](#)
- [AspectRatioPortrait property: Chart class](#)
- [Height property: Chart class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

OLType property: Chart class

Description

Use this property to specify that you want an overlay line chart to be displayed on the chart.

Note

Only charts with the property Type set to 0 (or %ChartType_2DBar) can have an overlay chart. If you specify any other chart type while specifying a value for the OLType property, no overlay chart will be displayed.

You can specify either a numeric or a constant value for this property. The value is:

Numeric Value	Constant Value	Description
4	%ChartType_2DLine	Overlay is drawn as a 2D line.

This property is read/write.

PieCenterLabelStyle property: Chart class

Description

Use this property to specify the CSS style string that defines the style for the pie chart center label.

This property is read/write.

Example

```
&oChart.PieCenterLabelStyle = "font-size:10px";
```

Related Topics

- [PieChartCenterLabel property: Chart class](#)

PieChartCenterLabel property: Chart class

Description

Use this property to specify the text for the label, which is displayed at the center of the pie chart.

This property is read/write.

Example

```
&oChart.PieChartCenterLabel = "Years";
```

Related Topics

- [PieCenterLabelStyle property: Chart class](#)

ShowCrossHair property: Chart class

Description

This property has been deprecated and is ignored.

SubTitle property: Chart class

Description

Use this property to specify the text for a subtitle for the chart as a String value. The subtitle appears beneath the main title.

This property is read/write.

Related Topics

- [TitleAlignment property: Chart class](#)

SubTitleAlignment property: Chart class

Description

This property has been desupported and is ignored.

Note

The TitleAlignment property controls the alignment of both title and subtitle.

Related Topics

- [SubTitle property: Chart class](#)
- [TitleAlignment property: Chart class](#)

SubTitleStyle property: Chart class

Description

Use this property to specify the CSS style string that defines the style of the subtitle text.

This property is read/write.

Example

```
&oChart.SubTitleStyle = "font-size:20px";
```

Related Topics

- [SubTitle property: Chart class](#)

TitleAlignment property: Chart class

Description

Use this property to specify an Integer value indicating the alignment for the main title text and subtitle text.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
1	%ChartTextAlign_Center	Center the displayed text.
2	%ChartTextAlign_End	Right-align the displayed text.
3	%ChartTextAlign_Start	Left-align the displayed text.
Note: %ChartTextAlign_Center is the default value.		

This property is read/write.

Related Topics

- [MainTitle property: Chart class](#)

TitleStyle property: Chart class

Description

Use this property to specify the CSS style string that defines the style of the title text.

This property is read/write.

Example

```
&oChart.TitleStyle = "font-size:25px;color:#00ffaa";
```

Related Topics

- [TitleAlignment property: Chart class](#)

Type property: Chart class

Description

Use this property to specify the type of chart that you want. You can specify either a numeric or constant value for this property. The valid values are:

Numeric Value	Constant Value	Description
0	%ChartType_2DBar	Two-dimensional bar chart
1	%ChartType_2DStackedBar	Two-dimensional stacked bar chart
2	%ChartType_2DStackedPercent Bar	Two-dimensional stacked percent bar chart
3	%ChartType_2DHorizStackedBar	Two-dimensional stacked horizontal bar chart
4	%ChartType_2DLine	Two-dimensional line chart
5	%ChartType_2DSteppedLine	Two-dimensional stepped line chart
6	%ChartType_2DPie	Two-dimensional pie chart
7	%ChartType_3DBar Note: This constant will be desupported in a future release and remains for backward compatibility only. Use the %ChartType_2DBar constant instead.	Three-dimensional bar chart
8	%ChartType_3DStackedBar Note: This constant will be deprecated in a future release and remains for backward compatibility only. Use the %ChartType_2DStackedBar constant instead.	Three-dimensional stacked bar chart

Numeric Value	Constant Value	Description
9	%ChartType_3DPie Note: This constant will be desupported in a future release and remains for backward compatibility only. Use the %ChartType_2DPie constant instead.	Three-dimensional pie chart
10	%ChartType_2DStackedHorizontalPercentBar	Two-dimensional stacked horizontal percent chart
11	%ChartType_3DStackedPercentBar Note: The %ChartType_3DPercentBar and %ChartType_3DStackedPercentBar constants will be desupported in a future release and remain for backward compatibility only. Use the %ChartType_2DPercentBar constant instead.	Three-dimensional stacked percent bar chart
13	%ChartType_2DHorizontalBar	Two-dimensional horizontal bar chart
14	%ChartType_2DScatter	Scatter chart
18	%ChartType_2DBubble	Bubble chart
31	%ChartType_Funnel	Funnel chart
32	%ChartType_2DRing	Two-dimensional ring chart
33	%ChartType_3DRing Note: This constant will be desupported in a future release and remains for backward compatibility only. Use the %ChartType_2DRing constant instead.	Three-dimensional ring chart

This property is read/write.

Related Topics

- [Chart Class Chart Types](#)
The following chart types are available for the Chart class:

Width property: Chart class

Description

On a classic page, use this property to specify a Number value indicating the width of the chart in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the chart.

Generally this property is used with charts created for iScripts, to specify the width of the image, before generating the image map. You can also use it to overwrite the width set in Application Designer.

If you try to read this property before setting it, the value returned is zero.

Note

The Height and Width properties must be set to the same value to change the size of a 2D Scatter chart, that is, a chart with the Type property set to %ChartType_2DScatter.

This property is read/write.

Related Topics

- [AspectRatio property: Chart class](#)
- [Height property: Chart class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

XAxisCrossPoint property: Chart class

Description

This property has been desupported and is ignored.

Related Topics

- [YAxisCrossPoint property: Chart class](#)

XAxisLabelOrient property: Chart class

Description

This property has been desupported and is ignored.

XAxisMax property: Chart class

Description

The maximum value of the x-axis.

This property is read/write.

XAxisMin property: Chart class

Description

The minimum value of the x-axis.

This property is read/write.

XAxisPrecision property: Chart class

Description

Use the XAxisPrecision property to control the number of decimal places displayed in the labels of a numeric x-axis.

This property is read/write.

Related Topics

- [YAxisPrecision property: Chart class](#)

XAxisTitle property: Chart class

Description

Use this property to specify the text for the x-axis title.

This property is read/write.

XAxisTitleOrient property: Chart class

Description

This property has been desupported and is ignored.

Y2AxisMax property: Chart class

Description

Use this property to specify the maximum value of the secondary y-axis as a Number value.

The maximum value sets the largest value that is displayed on the axis.

Note

If the Y2AxisMax and Y2AxisMin properties are not set, or are set to too narrow a range, ticks may not appear on the secondary y-axis.

This property is read/write.

Y2AxisMin property: Chart class

Description

Use this property to specify the minimum value of the y-axis as a Number value.

The minimum value sets the point at which the chart plots in positive and negative directions.

The default minimum value is the default value of the secondary y-axis.

Note

If the Y2AxisMax and Y2AxisMin properties are not set, or are set to too narrow a range, ticks may not appear on the secondary y-axis.

This property is read/write.

Y2AxisPrecision property: Chart class

Description

Use this property to specify an Integer value that controls the number of decimal places displayed in the labels of a numeric, secondary y-axis.

This property is read/write.

Y2AxisTitle property: Chart class

Description

Use this property to specify the title for the secondary y-axis as a String value.

This property is read/write.

Y2AxisTitleOrient property: Chart class

Description

Use this property to specify the orientation of the title for the secondary y-axis.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant value	Description
0	%ChartText_Horizontal	The secondary y-axis title is displayed horizontally.
90	%ChartText_Vertical	The secondary y-axis title is displayed vertically

This property is read/write.

YAxisCrossPoint property: Chart class

Description

This property has been desupported and is ignored.

Related Topics

- [XAxisCrossPoint property: Chart class](#)

YAxisLabelOrient property: Chart class

Description

This property has been desupported and is ignored.

YAxisMax property: Chart class

Description

Use this property to specify the maximum value of the y (data) axis. This property takes a numeric value.

The maximum value sets the largest value that is displayed on the axis.

Note

If the YAxisMax and YAxisMin properties are not set, or are set to too narrow a range, ticks may not appear on the y-axis.

This property is read/write.

YAxisMin property: Chart class

Description

Use this property to specify the minimum value of the y-axis. This property takes a numeric value.

The minimum value sets the point at which the chart plots in positive and negative directions.

The default minimum value is the default value of the y-axis.

Note

If the YAxisMax and YAxisMin properties are not set, or are set to too narrow a range, ticks may not appear on the y-axis.

This property is read/write.

YAxisPrecision property: Chart class

Description

Use the YAxisPrecision property to control the number of decimal places displayed in the labels of a numeric y-axis.

This property is read/write.

Related Topics

- [XAxisPrecision property: Chart class](#)

YAxisTicks property: Chart class

Description

Use this property to specify the number of minor tick marks along the y (data) axis. This property takes a numeric value.

This property is read/write.

Related Topics

- [Creating a Chart Using the Chart Class](#)
This section demonstrates how to create a simple chart based on the Chart class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.

YAxisTitle property: Chart class

Description

Use this property to specify text of the title for the y-axis.

This property is read/write.

YAxisTitleOrient property: Chart class

Description

This property has been desupported and is ignored.

ChartClientState Class Methods

In this section, the ChartClientState class methods are presented in alphabetical order.

ChartClientState

Syntax

`ChartClientState(Record_name, Field_Name)`

Description

Use the ChartClientState constructor to instantiate a ChartClientState object.

Parameters

Parameter	Description
<i>Record_Name</i>	Specify the name of the record that contains the chart control.
<i>Field_Name</i>	Specify the name of the field that contains the chart control.

Returns

A reference to a ChartClientState object.

Example

```
import PTCHART:ChartClientState;  
Local PTCHART:ChartClientState &myObj = create  
PTCHART:ChartClientState("QE_CHARTPROPWRK", "QE_CHART_FIELD");
```

Related Topics

- [aSelections property: ChartClientState class](#)
- [nType property: ChartClientState class](#)
- [Selecting and Highlighting Data Points](#)
Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

ChartClientState Class Properties

In this section, the ChartClientState class properties are presented in alphabetical order.

aSelections property: ChartClientState class

Description

Use this property to return an array of String representing the data items selected by the user. Each element of the array is in the following format with the first row represented as row 0:

```
RECORD_NAME.FIELD_NAME.ROW_NUM
```

This property is read only.

Example

Each element of the `aSelections` array is in the following format with the first row represented as row 0:

```
RECORD_NAME.FIELD_NAME.ROW_NUM
```

You must parse each element of the array to extract the row number returned and then update the appropriate row in the `RECORD.FIELD` that stores the Y/N values used by the `SetSelectedData` method of the `Chart` class whenever the chart is redrawn. Similarly, deselecting a data item must reset the value of that `RECORD.FIELD` to N.

In the following PeopleCode example, the field name, `QE_SELECTED`, is hard-coded in the program. For debugging purposes, this program also writes the complete set of selected data items to the `QE_CHARTPROP.QE_CHARTSELECTION` field:

```

import PTCHART:ChartClientState;

Local PTCHART:ChartClientState &myObj = create
PTCHART:ChartClientState("QE_CHARTPROPWRK", "QE_CHART_FIELD");

rem display selected chart type ;
Local integer &nRet = &myObj.nType;
QE_CHARTPROP.QE_CHARTTYPE = &nRet;

Local array of string &aSelected = &myObj.aSelections;

rem clean the session storage everytime;
QE_CHARTPROP.QE_CHARTSELECTION = "";
Local string &sForm = "win0";
Local string &sR = "QE_CHARTPROPWRK";
Local string &sF = "QE_CHART_FIELD";
Local string &sOc = "0";

AddOnLoadScript("oGlblChrt.RemoveTypeFromStorage('" | &sForm | "','" | &sR |
'" | &sF | "','" | &sOc | "')");
AddOnLoadScript("oGlblChrt.RemoveSelectionFromStorage('" | &sForm | "','" |
&sR | "','" | &sF | "','" | &sOc | "')");
rem end clean;

rem display selected datapoints if any;
rem when datapoint is not selected;
Local string &stest = ".";
If Find(&stest, &aSelected [1]) = 0 Then
    QE_CHARTPROP.QE_CHARTSELECTION = "No Data Selected!";
    rem Also save N in database ;
    Local Rowset &RS;
    &RS = GetLevel0().GetRow(1).GetRowset(Scroll.QE_CHARTPROPS);
    &Allrows = &RS.ActiveRowCount;
    For &i = 1 To &Allrows
        &Rec = &RS.GetRow(&i).GetRecord(Record.QE_CHARTPROPS);
        &Rec.GetField(Field.QE_SELECTED).value = "N";
    End-For;
    rem end save;
Else

```

```

rem when datapoint is selected;
Local string &sSelected = &aSelected.Join(", ", "", "");
rem clean the database first;
&RS = GetLevel0().GetRow(1).GetRowset(Scroll.QE_CHARTPROPS);
&Allrows = &RS.ActiveRowCount;
For &i = 1 To &Allrows
    &Rec = &RS.GetRow(&i).GetRecord(Record.QE_CHARTPROPS);
    &Rec.GetField(Field.QE_SELECTED).value = "N";
End-For;
rem end clean;
QE_CHARTPROP.QE_CHARTSELECTION = &sSelected;
rem split it and save to the database as Y;
For &i = 1 To (&aSelected.Len)
    &aRecFieldRow = Split(&aSelected [&i], ".");
    &recName = LTrim(&aRecFieldRow [1], "");
    &rowNum = RTrim(&aRecFieldRow [3], "");
    &RecField = &recName | "." | "QE_SELECTED";
    UpdateValue(@&RecField, Value(&rowNum + 1), "Y");
End-For;
End-If;

```

Related Topics

- [ChartClientState](#)
- [SetSelectedData method: Chart class](#)
- [Selecting and Highlighting Data Points](#)

Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

nChartRow property: ChartClientState class

Description

Use this property to specify an Integer representing the row number for the chart.

This property is read/write.

Example

```

import PTCHART:ChartClientState;

Local PTCHART:ChartClientState &chartState = create
PTCHART:ChartClientState("QE_CHARTPROPWRK", "QE_CHART_FIELD");
&chartState.nChartRow = 1;

```

nType property: ChartClientState class

Description

Use this property to return an Integer representing the new chart type as selected by the user.

The returned Integer values are:

Numeric Value	Description
0	Bar chart.
4	Line chart.
6	Pie chart.
13	Horizontal bar chart

This property is read-only.

Example

```
import PTCHART:ChartClientState;

Local PTCHART:ChartClientState &myObj = create
PTCHART:ChartClientState("QE_CHARTPROPWRK", "QE_CHART_FIELD");
Local integer &nRet = &myObj.nType;
QE_CHARTPROP.QE_CHARTTYPE = &nRet;
```

Related Topics

- [ChartClientState](#)
- [Selecting and Highlighting Data Points](#)
Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

ReferenceArea Class Properties

These properties are used by the ReferenceArea class. The properties are described in alphabetic order.

Related Topics

- [Creating and Using Data Series with Charts](#)
In PeopleSoft applications, chart data series are a grouping of related information. For example, if you were tracking sales for several divisions over many years, each division could be a series. Generally, every series in a chart has a distinct color. You can have more than one series in a chart for comparison. Each line in a line chart represents one series.

Association property: ReferenceArea class

Description

Use this property to specify which chart axis the reference area will be associated with. There is no default value; you must explicitly set the value of this property or the reference area will not appear in the chart. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
1	%Ref_Association_Y1	Associate the reference area with the y-axis.

Numeric Value	Constant Value	Description
2	%Ref_Association_X1	Associate the reference area with the x-axis. Note: This association can be made only if the x-axis is numeric.
3	%Ref_Association_Y2	Associate the reference area with the second y-axis.

This property is read/write.

Description property: ReferenceArea class

Description

Use this property to specify a description of the reference area as a String value. This text will appear in the chart legend and should describe what the reference area represents in the chart. The text will be displayed only when the `IsDisplayedTextInLegend` property is `True`.

See “Setting Chart Legends” in the Chart class design guidelines for more information on creating chart legends.

This property is read/write.

Related Topics

- [Chart Class Design Guidelines](#)
These topics provide an overview of how charts represent data and discuss:

IsDisplayedTextInLegend property: ReferenceArea class

Description

Use this property to specify a Boolean value indicating whether the `Description` property is displayed in the chart legend. The default value is `True`.

This property is read/write.

LineType property: ReferenceArea class

Description

Use this property to specify the style for a reference area with varied values. This property is ignored when the reference area contains a single set of minimum and maximum values. You can specify either an Integer or constant value for this property.

The following table lists the values you can specify:

Numeric Value	Constant Value	Description
1	%ChartLine_Straight Note: %ChartLine_Straight is the default value.	Straight line
2	%ChartLine_Curved	Curved line
3	%ChartLine_Stepped	Stepped line
4	%ChartLine_Segmented	Segmented line

Numeric Value	Constant Value	Description
5	%ChartLine_CenteredSegmented	Segmented line (centered)
6	%ChartLine_CenteredStepped	Stepped line (centered)

This property is read/write.

ReferenceAreaColor property: ReferenceArea class

Description

Use this property to specify the color of the reference area as an Integer or constant value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default	Default series color. When a data point is set to this, the default series color or the color that has been set by the programmer for that series is used instead. This value works only with the SetColorArray method of the Chart class.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

ReferenceAreaLocation property: ReferenceArea class

Description

Use this property to specify whether the reference area is displayed in front of or behind the chart. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
2	%Ref_Back	Display the reference area behind the chart. Note: %Ref_Back is the default value.
1	%Ref_Front	Display the reference area on top of the chart.

This property is read/write.

ReferenceAreaValues property: ReferenceArea class

Description

Use this property to specify an array of two numeric values. The values indicate the minimum and maximum for the reference area. The order of the values does not matter.

This property is read/write.

ReferenceAreaValueSet property: ReferenceArea class

Description

Use this property to specify an array of minimum and maximum value arrays. These pairs of minimum and maximum values, at different x-coordinates, are used to form a reference area. Each set of values maps to a group on the chart. ReferenceAreaValues will be ignored if ReferenceAreaValueSet is specified.

This property is read/write.

Example

```
&jRefAr1.ReferenceAreaValueSet = CreateArray(CreateArray(80000, 95570),  
CreateArray(30000, 50970), CreateArray(40000, 90070), CreateArray(24000,  
57000));
```

ShortText property: ReferenceArea class

Description

Use this property to specify a short description for the reference area as a String value. This text will be displayed as the data hint for the reference area.

This property is read/write.

ReferenceLine Class Properties

These properties are used by the ReferenceLine class. The properties are described in alphabetic order.

Related Topics

- [Using the ReferenceLine Class](#)
The ReferenceLine class is used in conjunction with the Chart class to display colored lines to be drawn with the chart based on numeric values along a chart axis. For each reference line, you would create a separate instance of the ReferenceLine class.

Association property: ReferenceLine class

Description

Use this property to specify which chart axis the reference line will be associated with. There is no default value; you must explicitly set the value of this property or the reference line will not appear in the chart. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
1	%Ref_Association_Y1	Associate the reference line with the y-axis.
2	%Ref_Association_X1	Associate the reference line with the x-axis. Note: This association can be made only if the x-axis is numeric.
3	%Ref_Association_Y2	Associate the reference line with the second y-axis.

This property is read/write.

Description property: ReferenceLine class

Description

Use this property to specify a description of the reference line as a String value. This text will appear in the chart legend and should describe what the reference line represents in the chart. The text will be displayed only when the IsDisplayedTextInLegend property is True.

See “Setting Chart Legends” in the Chart class design guidelines for more information on creating chart legends.

This property is read/write.

Related Topics

- [Chart Class Design Guidelines](#)
These topics provide an overview of how charts represent data and discuss:

IsDisplayedTextInLegend property: ReferenceLine class

Description

Use this property to specify a Boolean value indicating whether the Description property is displayed in the chart legend. The default value is True.

This property is read/write.

LineType property: ReferenceLine class

Description

Use this property to specify the style for a reference line with varied values. This property is ignored when the reference line contains a single value. You can specify either an Integer or constant value for this property.

The following table lists the values you can specify:

Numeric Value	Constant Value	Description
1	%ChartLine_Straight Note: %ChartLine_Straight is the default value.	Straight line
2	%ChartLine_Curved	Curved line
3	%ChartLine_Stepped	Stepped line
4	%ChartLine_Segmented	Segmented line
5	%ChartLine_CenteredSegmented	Segmented line (centered)
6	%ChartLine_CenteredStepped	Stepped line (centered)

This property is read/write.

ReferenceLineColor property: ReferenceLine class

Description

Use this property to specify the color of the reference line as an Integer or constant value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default	Default series color. When a data point is set to this, the default series color or the color that has been set by the programmer for that series is used instead. This value works only with the SetColorArray method of the Chart class.
0	%ChartColor_Black	Black

Numeric Value	Constant Value	Description
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

ReferenceLineLocation property: ReferenceLine class

Description

Use this property to specify whether the reference line is displayed in front of or behind the chart. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
2	%Ref_Back	Display the reference line behind the chart. Note: %Ref_Back is the default value.
1	%Ref_Front	Display the reference line on top of the chart.

This property is read/write.

ReferenceLineValue property: ReferenceLine class

Description

Use this property to specify the axis value for the reference line as a Number. If this property is not specified, no reference line is displayed.

This property is read/write.

ReferenceLineValueSet property: ReferenceLine class

Description

Use this property to specify an array of numeric values. This set of values, at different x-coordinates, are used to form the reference line. Each value maps to a group on the chart. ReferenceLineValue will be ignored if ReferenceLineValueSet is specified.

This property is read/write.

Example

```
&jRefLn2.ReferenceLineValueSet = CreateArray(3000, 5700, 4500);
```

ShortText property: ReferenceLine class

Description

Use this property to specify a short description for the reference line as a String value. This text will be displayed as the data hint for the reference line.

This property is read/write.

Series Class Properties

In this section, the Series class properties are presented in alphabetical order.

Related Topics

- [Using the Series Class](#)
The Series class is used in conjunction with the Chart class to override the default chart type (as defined by the Type property for the Chart object) for selected members of the data series. (The field representing the data series is specified using the SetDataSeries method.) Using the Series class allows you to render more than one chart type simultaneously.

Name property: Series class

Description

Use this property to identify the series as a String value.

! Important

The value of the Name property must match exactly the value of a member in the data series as specified by either the SetDataSeries method or set by the SetSeriesLabel method.

This property is read/write.

Related Topics

- [SetDataSeries method: Chart class](#)
- [SetSeriesLabels method: Chart class](#)

Type property: Series class

Description

Use this property to specify the override chart type for this data series.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description
0	%SeriesType_Bar	Display this series as a bar chart.
1	%SeriesType_Line	Display this series as a line chart.
2	%SeriesType_Area	Display this series as an area chart.
3	%SeriesType_LineWithArea	Display this series as a line with area chart.
4	%SeriesType_Inherit	Inherit the series type from the Chart object.

This property is read/write.

ToolTipLabel Class Properties

In this section, the ToolTipLabel class properties are presented in alphabetical order.

Related Topics

- [Using the ToolTipLabel Class](#)
The ToolTipLabel class is used in conjunction with the Chart class to display custom tooltips (also referred to as “data hints” or “hover text”) on chart data points thereby overriding the default tooltips that are automatically created from the chart data.

ToolTipLabelType property: ToolTipLabel class

Description

Use this property to specify which data elements are displayed as part of the custom tooltip.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description
0	%TooltipLbl_Group	Defaults to the value of SetDataSeries when that method is invoked.
1	%TooltipLbl_Series	Display the data series as specified by the SetDataSeries method.

Numeric Value	Constant Value	Description
2	%TooltipLbl_Value	Display a funnel chart's actual data as specified by the SetFunnelDataActual method.
3	%TooltipLbl_TargetValue	Display a funnel chart's actual data as specified by the SetFunnelDataTarget method.
4	%TooltipLbl_X	Display the x-axis data as specified by the SetDataXAxis method.
5	%TooltipLbl_Y	Display the primary y-axis data as specified by the SetDataYAxis method.
6	%TooltipLbl_Y2	Display the secondary y-axis data as specified by the SetDataYAxis and SetYAxisColumnType methods.
7	%TooltipLbl_Z	Display the z-axis data as specified by the SetDataZAxis method.

This property is read/write.

ToolTipLabelValue property: ToolTipLabel class

Use this property to specify the text string for the label as a String value.

This property is read/write.

DialGauge Class Methods

① Note

These methods are no longer used in PeopleTools 8.57 and will be ignored.

Refresh method: DialGauge class

Description

① Note

The Refresh method is no longer used in PeopleTools 8.57 and will be ignored.

SetThreshold method: DialGauge class

Description

Note

The SetThreshold method is no longer used in PeopleTools 8.57 and will be ignored.

DialGauge Class Properties

Note

These properties are no longer used in PeopleTools 8.57 and will be ignored.

AdditionalStyleSuffix property: DialGauge class

Description

Note

The AdditionalStyleSuffix property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationDuration property: DialGauge class

Description

Note

The AnimationDuration property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationType property: DialGauge class

Description

Note

The AnimationType property is no longer used in PeopleTools 8.57 and will be ignored.

BottomLabel property: DialGauge class

Description

Note

The BottomLabel property is no longer used in PeopleTools 8.57 and will be ignored.

BottomLabelPosition property: DialGauge class

Description

Note

The BottomLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeDecimalDigit property: DialGauge class

Description

Note

The GaugeDecimalDigit property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeMaximum property: DialGauge class

Description

Note

The GaugeMaximum property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeMinimum property: DialGauge class

Description

Note

The GaugeMinimum property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeURL property: DialGauge class

Description

Note

The GaugeURL property is no longer used in PeopleTools 8.57 and will be ignored.

Height property: DialGauge class

Description

Note

The Height property is no longer used in PeopleTools 8.57 and will be ignored.

IsDrillable property: DialGauge class

Description

Note

The IsDrillable property is no longer used in PeopleTools 8.57 and will be ignored.

LegendPosition property: DialGauge class

Description

Note

The LegendPosition property is no longer used in PeopleTools 8.57 and will be ignored.

MajorTickIncrement property: DialGauge class

Description

Note

The MajorTickIncrement property is no longer used in PeopleTools 8.57 and will be ignored.

MetricLabelPosition property: DialGauge class

Description

Note

The MetricLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

MetricLabelType property: DialGauge class

Description

Note

The MetricLabelType property is no longer used in PeopleTools 8.57 and will be ignored.

MinorTickIncrement property: DialGauge class

Description

Note

The MinorTickIncrement property is no longer used in PeopleTools 8.57 and will be ignored.

TickLabelPosition property: DialGauge class

Description

Note

The TickLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

TopLabel property: DialGauge class

Description

Note

The TopLabel property is no longer used in PeopleTools 8.57 and will be ignored.

TopLabelPosition property: DialGauge class

Description

Note

The TopLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

Type property: DialGauge class

Description

Note

The Type property is no longer used in PeopleTools 8.57 and will be ignored.

Width property: DialGauge class

Description

Note

The Width property is no longer used in PeopleTools 8.57 and will be ignored.

LEDGauge Class Methods

These methods are used by the LEDGauge class. The methods are described in alphabetic order.

Refresh method: LEDGauge class

Description

Note

The Refresh method is no longer used in PeopleTools 8.57 and will be ignored.

SetThreshold method: LEDGauge class

Description

Note

The SetThreshold method is no longer used in PeopleTools 8.57 and will be ignored.

LEDGauge Class Properties

These properties are used by the LEDGauge class. The properties are described in alphabetic order.

AdditionalStyleSuffix property: LEDGauge class

Description

This property has been desupported and is ignored.

AnimationDuration property: LEDGauge class

Description

Note

The AnimationDuration property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationType property: LEDGauge class

Description

Note

The AnimationType property is no longer used in PeopleTools 8.57 and will be ignored.

AspectRatio property: LEDGauge class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatio is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&lGauge.AspectRatio = 0.8;
```

Related Topics

- [Height property: LEDGauge class](#)
- [Width property: LEDGauge class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

BottomLabel property: LEDGauge class

Description**Note**

The BottomLabel property is no longer used in PeopleTools 8.57 and will be ignored.

BottomLabelPosition property: LEDGauge class

Description**Note**

The BottomLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeDecimalDigit property: LEDGauge class

Description

Note

The GaugeDecimalDigit property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeURL property: LEDGauge class

Description

Note

The GaugeURL property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [IsDrillable property: LEDGauge class](#)

Height property: LEDGauge class

Description

On a classic page, use this property to specify a Number value indicating the height of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

This property is read/write.

Related Topics

- [AspectRatio property: LEDGauge class](#)
- [Width property: LEDGauge class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

Html property: Chart class

Description

Use this property to retrieve the HTML string required to render the chart within an HTML area on the page. This is useful for rendering a chart on a page that does not have a Chart control but has an HTML area control, or for rendering charts on a tile that uses a content type of HTML area.

Use the `CreateObject` function, rather than the `GetLEDGauge` function, to instantiate the chart object when intending to use this property.

Note

On a fluid page, the combination of the `AspectRatio`, `Height`, and `Width` properties is used to determine the dimensions of the chart rendered via the returned HTML. If you don't specify these properties, the chart's dimensions automatically fit within the containing element.

This property is read-only.

Example

```
Local LedGauge &oChart;  
&oChart = CreateObject("LedGauge");  
  
&oChart.Value = 78;  
&oChart.Type = %GaugeType_LED_Arrow;  
  
&oChart.Width = 200;  
&oChart.Height = 300;  
&oChart.MetricLabelType = %Percent;  
  
rem set the HTML area control field value to Chart HTML;  
QE_DYNCHART_WRK.QE_HTMLAREA = &oChart.Html;
```

Related Topics

- [AspectRatio property: LEDGauge class](#)
- [Height property: LEDGauge class](#)
- [Width property: LEDGauge class](#)

IsDrillable property: LEDGauge class

Description

Note

The IsDrillable property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [GaugeURL property: LEDGauge class](#)

LegendPosition property: LEDGauge class

Description

Note

The LegendPosition property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [SetThreshold method: LEDGauge class](#)

MetricLabelPosition property: LEDGauge class

Description

Note

The MajorTickIncrement property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [BottomLabelPosition property: LEDGauge class](#)

MetricLabelType property: LEDGauge class

Description

Note

The MetricLabelType property is no longer used in PeopleTools 8.57 and will be ignored.

TopLabel property: LEDGauge class

Description

Note

The TopLabel property is no longer used in PeopleTools 8.57 and will be ignored.

TopLabelPosition property: LEDGauge class

Description

Note


The TopLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.





Type property: LEDGauge class

Description

Use this property to specify the visual representation of the gauge. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
26	%GaugeType_LED_Dot	Display an LED gauge as a dot:  Note: %GaugeType_LED_Dot is the default value.

Numeric Value	Constant Value	Description
27	%GaugeType_LED_Arrow	Display an LED gauge as an arrow: <u>Sales of new Cars</u> 
28	%GaugeType_LED_Triangle	Display an LED gauge as a triangle: <u>Sales of new Cars</u> 
29	%GaugeType_LED_Rectangle	Display an LED gauge as a rectangle: <u>Sales of new Cars</u> 
30	%GaugeType_LED_Square	Display an LED gauge as a square: <u>Sales of new Cars</u> 

This property is read/write.

Example

In the following example, the status meter gauge is displayed horizontally.

```
&cLEDGauge.Type = %GaugeType_StatusMeter_Horiz;
```

Width property: LEDGauge class

Description

On a classic page, use this property to specify a Number value indicating the width of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

This property is read/write.

Related Topics

- [AspectRatio property: LEDGauge class](#)
- [Height property: LEDGauge class](#)

- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

RatingGaugeChart Class Methods

In this section, the RatingGaugeChart class methods are presented in alphabetical order.

SetRatingGaugeThresholds method: RatingGaugeChart class

Syntax

```
SetRatingGaugeThresholds(&Array_of_GaugeThresholds)
```

Description

Use the SetRatingGaugeThresholds method to set one or more threshold values for the rating gauge chart.

Parameters

Parameter	Description
<i>&Array_of_GaugeThresholds</i>	Specify an already instantiated array of GaugeThreshold objects as the thresholds for this rating gauge chart. Note: This array can contain a maximum of three elements.

Returns

None.

Example

```
&oGTreshArray = CreateArray(&oGTresh1, &oGTresh2, &oGTresh3, &oGTresh4);  
  
&oRating.SetRatingGaugeThresholds(&oGTreshArray);
```

Related Topics

- [GaugeThreshold Class Properties](#)
In this section, the GaugeThreshold class properties are presented in alphabetical order.

RatingGaugeChart Class Properties

In this section, the RatingGaugeChart class properties are presented in alphabetical order.

AspectRatio property: RatingGaugeChart class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatio is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&rGauge.AspectRatio = 0.8;
```

Related Topics

- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Width property: RatingGaugeChart class](#)

ChangedState property: RatingGaugeChart class

Description

Use this property to specify the definition for the gauge's changed state as a RatingGaugeState object.

This property is read/write.

Example

```
&oRating.ChangedState = &oRatGaugeChangedState;
```

Related Topics

- [RatingGaugeState Class Properties](#)
In this section, the RatingGaugeState class properties are presented in alphabetical order.

HoverState property: RatingGaugeChart class

Description

Use this property to specify the definition for the gauge's hover state as a RatingGaugeState object.

This property is read/write.

Example

```
&oRating HoverState = &oRatGaugHoverState;
```

Related Topics

- [RatingGaugeState Class Properties](#)

In this section, the RatingGaugeState class properties are presented in alphabetical order.

Html property: Chart class

Description

Use this property to retrieve the HTML string required to render the chart within an HTML area on the page. This is useful for rendering a chart on a page that does not have a Chart control but has an HTML area control, or for rendering charts on a tile that uses a content type of HTML area.

Use the CreateObject function, rather than the GetRatingGauge function, to instantiate the chart object when intending to use this property.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties is used to determine the dimensions of the chart rendered via the returned HTML. If you don't specify these properties, the chart's dimensions automatically fit within the containing element.

This property is read-only.

Example

```
Local RatingGaugeChart &oRating;  
&oRating = CreateObject("RatingGaugeChart");
```

```
&oRating.Value = 5;
```

```
&oRating.Min = 0;  
&oRating.Max = 10;  
&oRating.Step = 0.5;  
&oRating.Width = 200;  
&oRating.Height = 300;
```



```
rem set the HTML area control field value to Chart HTML;  
QE_DYNCHART_WRK.QE_HTMLAREA = &oRating.Html;
```

Related Topics

- [AspectRatio property: RatingGaugeChart class](#)
- [Height property: Chart class](#)
- [Width property: Chart class](#)

Max property: RatingGaugeChart class

Description

Use this property to specify the maximum number for the rating scale as an Integer value. The default value is 5.

Note

If the maximum is too large and the size of the gauge too small, the gauge shape will not be displayed.

Min property: RatingGaugeChart class

Description

Use this property to specify the minimum number for the rating scale as a Float value. The default value is 0.

This property is read/write.

ReadOnly property: RatingGaugeChart class

Description

Use this property to specify a Boolean value indicating whether the gauge is interactive—that is, whether the user can click on (or touch) the gauge to trigger an action. The default value is False; the gauge is interactive.

Note

If there is FieldChange PeopleCode on the field, the PeopleCode will not execute when the ReadOnly property is True.

SelectedState property: RatingGaugeChart class

Description

Use this property to specify the definition for the gauge's selected state as a RatingGaugeState object.

This property is read/write

Example

```
&oRating.SelectedState = &oRatGaugSelState;
```

Related Topics

- [RatingGaugeState Class Properties](#)
In this section, the RatingGaugeState class properties are presented in alphabetical order.

Step property: RatingGaugeChart class

Description

Use this property to specify the rating increments as any Float value. As examples, a value of 0.5 displays ratings in half-increments; a value of 1 displays ratings in whole number-increments.

Note

The default value is 1.

Title property: RatingGaugeChart class

Description

Use this property to specify the title for the rating gauge chart as a String value. The title is displayed as a tooltip for the rating gauge chart and is generated as part of the chart information for accessibility purposes.

If no value is specified, then the rating gauge chart title is automatically generated.

This property is read/write.

UnselectedState property: RatingGaugeChart class

Description

Use this property to specify the definition for the gauge's unselected state as a RatingGaugeState object.

This property is read/write.

Example

```
&oRating.UnselectedState = &oRatGaugUnSelState;
```

Related Topics

- [RatingGaugeState Class Properties](#)
In this section, the RatingGaugeState class properties are presented in alphabetical order.

Width property: RatingGaugeChart class

Description

On a classic page, use this property to specify a Number value indicating the width of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

This property is read/write.

Related Topics

- [AspectRatio property: RatingGaugeChart class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

RatingGaugeState Class Properties

In this section, the RatingGaugeState class properties are presented in alphabetical order.

BorderColor property: RatingGaugeState class

Description

Use this property to specify the border color for the shape representing this rating gauge status as an Integer value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray

Numeric Value	Constant Value	Description
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Color property: RatingGaugeState class

Description

Use this property to specify the color for the shape representing this rating gauge status as an Integer value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow

Numeric Value	Constant Value	Description
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Shape property: RatingGaugeState class

Description

Use this property to specify the shape representing this rating gauge status as an Integer value.

Value	Constant	Description
0	%RatingGauge_Star Note: %RatingGauge_Star is the default value.	Star
1	%RatingGauge_Circle	Circle
2	%RatingGauge_Rectangle	Rectangle
3	%RatingGauge_Diamond	Diamond
4	%RatingGauge_Triangle	Triangle

GaugeThreshold Class Properties

In this section, the GaugeThreshold class properties are presented in alphabetical order.

BorderColor property: GaugeThreshold class

Description

Use this property to specify the border color for the shape representing this rating gauge threshold as an Integer value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan

Numeric Value	Constant Value	Description
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Color property: GaugeThreshold class

Description

Use this property to specify the color for the shape representing this rating gauge threshold as an Integer value.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red

Numeric Value	Constant Value	Description
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Description property: GaugeThreshold class

Description

Use this property to specify as String value to be displayed as a tooltip for this rating gauge threshold.

MaxValue property: GaugeThreshold class

Description

Use this property to specify the threshold value as a Number value.

This property is read/write.

StatusMeterGauge Class Methods

These methods are used by the StatusMeterGauge class. The methods are described in alphabetic order.

Refresh method: StatusMeterGauge class

Description

① Note

The Refresh method is no longer used in PeopleTools 8.57 and will be ignored.

SetThreshold method: StatusMeterGauge class

Description

Note

The SetThreshold method is no longer used in PeopleTools 8.57 and will be ignored.

StatusMeterGauge Class Properties

These properties are used by the StatusMeterGauge class. The properties are described in alphabetic order.

AdditionalStyleSuffix property: StatusMeterGauge class

Description

This property has been desupported and is ignored.

AnimationDuration property: StatusMeterGauge class

Description

Note

The AnimationDuration property is no longer used in PeopleTools 8.57 and will be ignored.

AnimationType property: StatusMeterGauge class

Description

Note

The AnimationType property is no longer used in PeopleTools 8.57 and will be ignored.

AspectRatio property: StatusMeterGauge class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatio is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&smGauge.AspectRatio = 0.8;
```

Related Topics

- [Height property: StatusMeterGauge class](#)
- [Width property: StatusMeterGauge class](#)
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:

BottomLabel property: StatusMeterGauge class

Description**Note**

The BottomLabel property is no longer used in PeopleTools 8.57 and will be ignored.

BottomLabelPosition property: StatusMeterGauge class

Description**Note**

The BottomLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeDecimalDigit property: StatusMeterGauge class

Description

Note

The GaugeDecimalDigit property is no longer used in PeopleTools 8.57 and will be ignored.

GaugeMaximum property: StatusMeterGauge class

Description

Note

The GaugeMaximum property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [GaugeMinimum property: StatusMeterGauge class](#)

GaugeMinimum property: StatusMeterGauge class

Description

Note

The GaugeMinimum property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [GaugeMaximum property: StatusMeterGauge class](#)

GaugeURL property: StatusMeterGauge class

Description

Note

The GaugeURL property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [IsDrillable property: StatusMeterGauge class](#)

Height property: StatusMeterGauge class

Description

On a classic page, use this property to specify a Number value indicating the height of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

This property is read/write.

Related Topics

- [AspectRatio property: StatusMeterGauge class](#)
- [Width property: StatusMeterGauge class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

Html property: Chart class

Description

Use this property to retrieve the HTML string required to render the chart within an HTML area on the page. This is useful for rendering a chart on a page that does not have a Chart control but has an HTML area control, or for rendering charts on a tile that uses a content type of HTML area.

Use the CreateObject function, rather than the GetStatusMeterGauge function, to instantiate the chart object when intending to use this property.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties is used to determine the dimensions of the chart rendered via the returned HTML. If you don't specify these properties, the chart's dimensions automatically fit within the containing element.

This property is read-only.

Example

```
Local StatusMeterGauge &oSM;  
&oSM = CreateObject("StatusMeterGauge");  
  
&oSM.Value = 68;  
  
&oSM.GaugeMinimum = 1;  
&oSM.GaugeMaximum = 100;  
&oSM.Type = %GaugeType_StatusMeter_Circ;  
&oSM.Width = 200;  
&oSM.Height = 200;  
  
&oSM.MetricLabelType = %Percent;  
&oSM.MetricLabelPosition = %Label_On;  
  
rem set the HTML area control field value to Chart HTML;  
QE_DYNCHART_WRK.QE_HTMLAREA = &oSM.Html;
```

Related Topics

- [AspectRatio property: StatusMeterGauge class](#)
- [Height property: StatusMeterGauge class](#)
- [Width property: StatusMeterGauge class](#)

IsDrillable property: StatusMeterGauge class

Description

① Note

The IsDrillable property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [GaugeURL property: StatusMeterGauge class](#)

LegendPosition property: StatusMeterGauge class

Description

① Note

The LegendPosition property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [SetThreshold method: StatusMeterGauge class](#)

MajorTickIncrement property: StatusMeterGauge class

Description

Note

The MajorTickIncrement property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [MinorTickIncrement property: StatusMeterGauge class](#)

MetricLabelPosition property: StatusMeterGauge class

Description

Note

The MetricLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [BottomLabelPosition property: StatusMeterGauge class](#)

MetricLabelType property: StatusMeterGauge class

Description

Note

The MetricLabelType property is no longer used in PeopleTools 8.57 and will be ignored.

MinorTickIncrement property: StatusMeterGauge class

Description

Note

The MinorTickIncrement property is no longer used in PeopleTools 8.57 and will be ignored.

Related Topics

- [MajorTickIncrement property: StatusMeterGauge class](#)

TopLabel property: StatusMeterGauge class

Description

 Note

The TopLabel property is no longer used in PeopleTools 8.57 and will be ignored.

TopLabelPosition property: StatusMeterGauge class

Description

 Note


The TopLabelPosition property is no longer used in PeopleTools 8.57 and will be ignored.

Type property: StatusMeterGauge class

Description

Use this property to specify the visual representation of the gauge. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
24	%GaugeType_StatusMeter_Horiz	Display a horizontal status meter gauge: 
25	%GaugeType_StatusMeter_Vert	Display a vertical status meter gauge:  Note: %GaugeType_StatusMeter_Vert is the default value.

Numeric Value	Constant Value	Description
34	%GaugeType_StatusMeter_Circ	Display a circular status meter gauge: 

This property is read/write.

Example 1

The following example demonstrates creating a circular status meter gauge without a threshold:



In the following example, the status meter gauge is displayed horizontally.

```
Local StatusMeterGauge &oSM;  
  
/* Instantiate a StatusMeterGauge object */  
&oSM = GetStatusMeterGauge(QE_GAUGEMETRIC.QE_SM1);  
&oSM.Type = %GaugeType_StatusMeter_Circ;  
  
&oSM.GaugeMinimum = 1;  
&oSM.GaugeMaximum = 100;  
&oSM.IsDrillable = True;
```

```


&oSM.GaugeURL = "http://irs.gov";
&oSM.Width = 400;
&oSM.Height = 400;
&oSM.MetricLabelType = %Percent;

rem this property works for DVT gauge but not for JET gauge;
rem &oSM.MetricLabelPosition = %Label_None;

```

Example 2

The following example demonstrates creating a circular status meter gauge with thresholds:

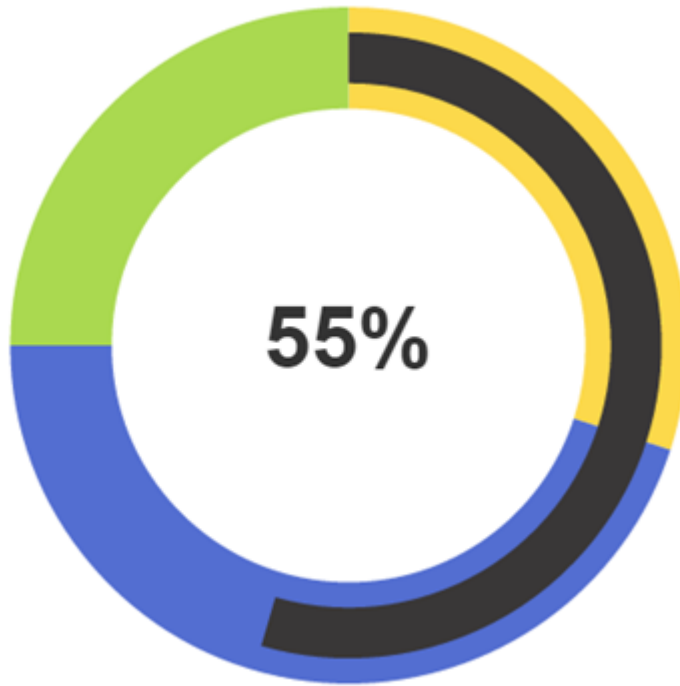

```

Declare Function get_gauge_thresholds PeopleCode FUNCLIB.THRESHOLDS
FieldFormula;

```

```

Local StatusMeterGauge &oSM;

/* Instantiate a StatusMeterGauge object */
&oSM = GetStatusMeterGauge(QE_GAUGEMETRIC.QE_SM1);
&oSM.Type = %GaugeType_StatusMeter_Circ;

/* Set the gauge thresholds */
&oSM.SetThreshold(get_gauge_thresholds());

/* Set properties for the status meter gauge */
&oSM.GaugeMinimum = 1;
&oSM.GaugeMaximum = 100;
&oSM.IsDrillable = True;
&oSM.GaugeURL = "http://irs.gov";
&oSM.Width = 400;
&oSM.Height = 400;

```



```
&oSM.MetricLabelType = %Percent;
&oSM.MetricLabelPosition = %Label_On;

/* Function definition from FUNCLIB.THRESHOLDS */
Function get_gauge_thresholds() Returns Threshold;
  Local Threshold &oThr1;
  Local array of number &Values, &Colors;
  Local array of string &Descr;
  &oThr1 = GetThreshold();
  &oThr1.Id = 1;
  &Values = CreateArray(30, 75, 100);
  &Colors = CreateArray(17, 1, 14, 5, 6);
  &Descr = CreateArray("Low", "Med", "High");
  &oThr1.Values = &Values;
  &oThr1.Colors = &Colors;
  &oThr1.Descriptions = &Descr;
  Return &oThr1;
End-Function;
```

Width property: StatusMeterGauge class

Description

On a classic page, use this property to specify a Number value indicating the width of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

This property is read/write.

Related Topics

- [AspectRatio property: StatusMeterGauge class](#)
- [Height property: StatusMeterGauge class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

Threshold Class Properties

In this section, the Threshold class properties are presented in alphabetical order.

Related Topics

- [Using the Threshold Class](#)

The Threshold class is used in conjunction with the two gauge classes: LEDGauge and StatusMeterGauge. The Threshold class provides a way to add reference areas and color coding to your gauges.

Colors property: Threshold class

Description

Use this property to specify the color values as an Array of Number. Choose a color for each reference area on the gauge.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Example

In the following example, the colors red, yellow, and green are specified by numeric value rather than by constant:

```
&Colors = CreateArray(10, 12, 5);  
&oThr1.Colors = &Colors;
```

Related Topics

- [Descriptions property: Threshold class](#)

Descriptions property: Threshold class

Description

Use this property to specify the descriptions as an Array of String. The number of descriptions in the Descriptions array should match the number of colors that you have defined in the Colors array.

This property is read/write.

Example

The Descriptions array provides descriptions for the color values:

```
&Descr = CreateArray("Low", "Med", "High");  
&oThr1.Descriptions = &Descr;
```

Related Topics

- [Colors property: Threshold class](#)

Id property: Threshold class

Description

Use this property to optionally specify an identifier for the Threshold object as a Number.

This property is read/write.

Values property: Threshold class

Description

Use this property to specify the values as an Array of Number. Since the values mark the boundaries between the colors in the threshold, the number of entries in the Values array should be one less than the number of colors in the Colors array.

This property is read/write.

Example

In this example, the number items in the Values array is one less than the number items in the Colors array:

```
&Values = CreateArray(30, 75);
&Colors = CreateArray(%ChartColor_Red, %ChartColor_Yellow, %ChartColor_Green);
&Descr = CreateArray("Low", "Med", "High");
&oThr1.Values = &Values;
&oThr1.Colors = &Colors;
&oThr1.Descriptions = &Descr;
```

Related Topics

- [Colors property: Threshold class](#)

SparkChart Class Methods

In this section, the SparkChart class methods are presented in alphabetical order.

Related Topics

- [SparkChartItem Class Properties](#)
In this section, the SparkChartItem class properties are presented in alphabetical order.

SetSparkChartItems method: SparkChart class

Syntax

```
SetSparkChartItems(&Array_of_ChartItems)
```

Description

Use the SetSparkChartItems method to set one or more items for the spark chart.

Parameters

Parameter	Description
<i>&Array_of_ChartItems</i>	Specify an already instantiated array of SparkChartItem objects as the items for this spark chart.

Returns

None.

Example

```
&aS.SetSparkChartItems(CreateArray(&aS1, &aS2, &aS3, &aS4, &aS5, &aS6, &aS7,
&aS8, &aS9));
```

SparkChart Class Properties

In this section, the SparkChart class properties are presented in alphabetical order.

AnimationDuration property: SparkChart class

Description

Use this property to specify an Integer value (0 or greater) indicating how long (in milliseconds) the spark chart animation should last.

If this property is not specified, it defaults to 0.5 seconds.

This property is read/write.

AnimationType property: SparkChart class

Description

Use this property to specify the animation type for the spark chart.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value
0	%Animation_None
1	%Animation_Auto
	Note: The automatic animation is determined by the charting engine and varies by chart type.
	Note: %Animation_Auto is the default value.

This property is read/write.

AspectRatio property: SparkChart class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatio is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&oSpChart.AspectRatio = 0.8;
```

Related Topics

- [Width property: SparkChart class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

barGapRatio property: SparkChart class

Description

Use this property to specify the gap between spark chart bars as a Number value from 0 to 1 inclusive. This property is valid for bar charts and floating bar charts only. When the value is 0, there is no gap between spark chart bars; when the value is 0.5, the gap width is 50% of the total bar width. For example:

```
&oSpChart.barGapRatio = 0;
```



```
&oSpChart.barGapRatio = 0.5;
```



```
&oSpChart.barGapRatio = 0.9;
```



The default value is 0.

This property is read/write

Related Topics

- [Type property: SparkChart class](#)

Color property: SparkChart class

Description

Use this property to specify the primary color for spark line charts, area charts, or line with area charts.

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Html property: Chart class

Description

Use this property to retrieve the HTML string required to render the chart within an HTML area on the page. This is useful for rendering a chart on a page that does not have a Chart control but has an HTML area control, or for rendering charts on a tile that uses a content type of HTML area.

Use the CreateObject function, rather than the GetSparkChart function, to instantiate the chart object when intending to use this property.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties is used to determine the dimensions of the chart rendered via the returned HTML. If you don't specify these properties, the chart's dimensions automatically fit within the containing element.

This property is read-only.

Example

```
Local SparkChart &aS;  
Local SparkChartItem &aS1, &aS2, &aS3;  
&aS = CreateObject("SparkChart");  
  
&aS.Type = %SparkChart_Line;  
&aS.Color = 2;  
&aS.LineType = %SparkLine_Straight;  
&aS.Width = 400;  
&aS.Height = 200;  
  
rem set spark chart items;  
&aS1 = GetSparkChartItem();  
&aS1.Value = 65;  
&aS1.Color = 1;  
  
&aS2 = GetSparkChartItem();  
&aS2.Value = 70;  
&aS2.Color = 3;  
  
&aS3 = GetSparkChartItem();  
&aS3.Value = 90;  
&aS3.Color = 7;  
  
&aS.SetSparkChartItems(CreateArray(&aS1, &aS2, &aS3));  
  
rem set the HTML area control field value to Chart HTML;  
QE_DYNCHART_WRK.QE_HTMLAREA = &aS.Html;
```

Related Topics

- [AspectRatio property: SparkChart class](#)
- [Height property: Chart class](#)
- [Width property: SparkChart class](#)

IsDrillable property: SparkChart class

Description

Use this property to specify a Boolean value indicating whether the spark chart is interactive—that is, whether the user can click on (or touch) the spark chart to trigger an action. The default value is False.

The source of interactivity on a spark chart can come from one of two places:

- A URL set in the chart's SparkChartURL property.
- FieldChange PeopleCode on the record field that holds the chart area (that is, the Application Designer chart control).

If both a URL is set in the SparkChartURL property and FieldChange PeopleCode exists on the record field of the chart control, the URL will take precedence over the PeopleCode.

This property is read/write.

Related Topics

- [SparkChartURL property: SparkChart class](#)

LineStyle property: SparkChart class

Description

Use this property to specify the style for spark line charts and line with area charts.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description	Example
0	%SparkLineStyle_Solid Note: %SparkLineStyle_Solid is the default value.	Solid line	
1	%SparkLineStyle_Dashed	Dashed line	
2	%SparkLineStyle_Dotted	Dotted line	

This property is read/write.

Related Topics

- [Type property: SparkChart class](#)

LineType property: SparkChart class

Description

Use this property to specify the style for spark line charts, line with area charts, and area charts.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description	Example
0	%SparkLine_None	No line	
1	%SparkLine_Straight Note: %SparkLine_Straight is the default value.	Straight line	
2	%SparkLine_Curved	Curved line	
3	%SparkLine_Stepped	Stepped line	
4	%SparkLine_Segmented	Segmented line	

This property is read/write.

Related Topics

- [Type property: SparkChart class](#)

LineWidth property: SparkChart class

Description

Use this property to specify the line width for spark line charts and line with area charts as a Number value. For example:

```
&oSpChart.lineWidth= 1;
```



```
&oSpChart.lineWidth=5;
```



The default value is 1.

This property is read/write.

SparkChartURL property: SparkChart class

Description

Use this property to specify a valid URL as a String value. If IsDrillable is true, then the user is redirected to this URL after clicking on (or touching) the spark chart.

This property is read/write.

Related Topics

- [IsDrillable property: SparkChart class](#)

Title property: SparkChart class

Description

Use this property to specify the title for the spark chart as a String value. The title is displayed as a tooltip for the spark chart and is generated as part of the chart information for accessibility purposes.

If no value is specified, then the spark chart title is automatically generated.

This property is read/write.

Related Topics

- [Type property: SparkChart class](#)

Type property: SparkChart class

Description

Use this property to specify the style for spark line charts.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description	Example
0	%SparkChart_Bar	Bar spark chart	
1	%SparkChart_Line Note: %SparkChart_Line is the default value.	Line spark chart	
2	%SparkChart_Area	Area spark chart	
3	%SparkChart_LineWithArea	Line with area spark chart	

Numeric Value	Constant Value	Description	Example
4	%SparkChart_Floating Bar	Floating bar spark chart Note: See the FloatValue property: SparkChartItem class property for more information on floating bar charts.	

This property is read/write.

Width property: SparkChart class

Description

On a classic page, use this property to specify a Number value indicating the width of the gauge in pixels.

Note

On a fluid page, the combination of the AspectRatio, Height, and Width properties are used to determine the size of the gauge.

Related Topics

- [AspectRatio property: SparkChart class](#)
- [Sizing a Chart or Gauge in Classic Mode](#)
When a chart or gauge is placed on a classic page, the size of the chart or gauge is determined in one of two ways:
- [Fluid Mode Considerations for Charts and Gauges](#)
Defining charts and gauges for fluid pages is very similar to defining charts and gauges for classic mode. There are some key differences that you need to take into account.

SparkChartItem Class Properties

In this section, the SparkChartItem class properties are presented in alphabetical order.

BorderColor property: SparkChartItem class

Description

Use this property to specify the border color for the shape representing this spark chart item as an Integer value

The following lists all the values you can specify. You can use either the numeric or constant value.

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

Color property: SparkChartItem class

Description

Use this property to specify the color for the shape representing this spark chart item as an Integer value.

The following lists all the values you can specify. You can use either the numeric or constant value

Numeric Value	Constant Value	Description
-1	%ChartColor_Series_Default Note: %ChartColor_Series_Default is the default value.	Default color as selected by the charting engine.
0	%ChartColor_Black	Black
1	%ChartColor_Blue	Blue
2	%ChartColor_Cyan	Cyan
3	%ChartColor_DarkGray	Dark gray
4	%ChartColor_Gray	Gray

Numeric Value	Constant Value	Description
5	%ChartColor_Green	Green
6	%ChartColor_LightGray	Light gray
7	%ChartColor_Magenta	Magenta
8	%ChartColor_Orange	Orange
9	%ChartColor_Pink	Pink
10	%ChartColor_Red	Red
11	%ChartColor_White	White
12	%ChartColor_Yellow	Yellow
13	%ChartColor_Red_Orange	Red-orange
14	%ChartColor_Yellow_Green	Yellow-green
15	%ChartColor_Blue_Violet	Blue-violet
16	%ChartColor_Purple	Purple
17	%ChartColor_Yellow_Orange	Yellow-orange

This property is read/write.

FloatValue property: SparkChartItem class

Description

Use this property to specify float value for this spark chart item as a Number value. The float value becomes the floor, or starting point, for the spark chart item in pixels. The value of the Value property is added to the float.

If this property is not specified, the default value is to start the bar from the x-axis, effectively 0.

Note

This property applies only when the Type property of the SparkChart instance is set to %SparkChartType_FloatingBar.

This property is read/write.

Related Topics

- [Type property: SparkChart class](#)
- [Value property: SparkChartItem class](#)

MarkerDisplayed property: SparkChartItem class

Description

Use this property to specify a Boolean value indicating whether a marker is displayed for this spark chart item.

The default value is False.

This property is read/write.

Related Topics

- [MarkerShape property: SparkChartItem class](#)

MarkerShape property: SparkChartItem class

Description

Use this property to specify the marker shape for this spark chart item.

Note

The marker is displayed only if the MarkerDisplayed property for this spark chart item is True.

You can specify either an Integer or constant value for this property. The values are:

Numeric Value	Constant Value	Description
0	%SparkMarker_Auto Note: %SparkMarker_Auto is the default value.	Auto
1	%SparkMarker_Square	Square
2	%SparkMarker_Circle	Circle
3	%SparkMarker_Diamond	Diamond
4	%SparkMarker_Plus	Plus sign
5	%SparkMarker_TriangleDown	Triangle with the tip down
6	%SparkMarker_TriangleUp	Triangle with the tip up
7	%SparkMarker_Human	Human

This property is read/write.

Related Topics

- [MarkerDisplayed property: SparkChartItem class](#)

Value property: SparkChartItem class

Description

Use this property to specify the value (or height in pixels) for this spark chart item as a Numeric value.

Note

If the Type property of the SparkChart instance is set to %SparkChartType_FloatingBar and a float value is defined for this spark chart item, then FloatValue and Value are added to determine the top of the bar.

This property is read/write.

Related Topics

- [FloatValue property: SparkChartItem class](#)

Gantt Class Methods

These methods are used by the Gantt class. The methods are described in alphabetic order.

Refresh method: Gantt class

Syntax

Refresh()

Description

Use the Refresh method if the underlying data of the chart has changed, and you want to update the chart.

Note

This method has been desuported and remains for backward compatibility only. Use the SetTaskAppData method or SetTaskData method instead.

You don't need to refresh after setting a property or method of the chart itself, such as setting the starting point or changing colors. When a method or property is used, the chart is automatically refreshed.

Parameters

None.

Returns

None.

Example

```
&MyChart.Refresh();
```

Related Topics

- [SetTaskAppData method: Gantt class](#)
- [SetTaskData method: Gantt class](#)

Reset method: Gantt class

Syntax

```
Reset()
```

Description

Use the Reset method to clear all existing chart settings and data.

Parameters

None.

Returns

None.

Related Topics

- [Refresh method: Chart class](#)

SetActualEndDate method: Gantt class

Syntax

```
SetActualEndDate(RecordName.FieldName)
```

Description

Use the SetActualEndDate method to specify the field in the record that defines the actual end date. This is an optional method, and is used in conjunction with the SetPlannedEndDate method. If an actual end date is specified, then an actual start date must also be specified. When defined, the actual or baseline tasks are visually shown as a separate task bar and are layered beneath the planned task if the two overlap.

Note

For any task that has a bad date format (from either SetActualEndDate or SetActualStartDate), any overlaid baseline information is not displayed in the chart section.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that contains the value used to define the actual end date. This field must be of DateTime or Date type.

Returns

None.

Related Topics

- [SetActualStartDate method: Gantt class](#)
- [SetPlannedEndDate method: Gantt class](#)
- [SetPlannedStartDate method: Gantt class](#)

SetActualStartDate method: Gantt class

Syntax

```
SetActualStartDate(RecordName.FieldName)
```

Description

Use the SetActualStartDate method to specify the field in the record that defines the actual start date. This is an optional method, and is used in conjunction with the SetPlannedStartDate method. If an actual start date is specified, then an actual end date must also be specified. When defined, the actual or baseline tasks are visually shown as a separate task bar and are layered beneath the planned task if the two overlap.

Note

For any task that has a bad date format (from either SetActualEndDate or SetActualStartDate), any overlaid baseline information is not displayed in the chart section.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that contains the value used to define the actual start date. This field must be of DateTime or Date type.

Returns

None.

Related Topics

- [SetActualEndDate method: Gantt class](#)
- [SetPlannedEndDate method: Gantt class](#)
- [SetPlannedStartDate method: Gantt class](#)

SetActualTaskBarColor method: Gantt class

Syntax

```
SetActualTaskBarColor(RecordName.FieldName)
```

Description

Use the SetActualTaskBarColor method to specify the field in the record that defines the colors for either the actual task bar or the actual milestone glyph.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the task bar color. This field must be of type number, which means you can only use the numeric value for the color.

Returns

None.

Related Topics

- [SetPlannedTaskBarColor method: Gantt class](#)
- [TaskMilestoneGlyph property: Gantt class](#)

SetChartArea method: Gantt class

Syntax

```
SetChartArea(Percentage)
```

Description

Use the SetChartArea method to specify what percentage of the Gantt chart is allocated to displaying the chart section. By default, both the task and chart sections are allocated 50% of the available space provided by the Gantt chart.

Parameters

Parameter	Description
<i>Percentage</i>	Specify the percentage of the page space for a Gantt chart that is allocated for displaying the chart area. Oracle recommends setting this value above .20 or 20%. Any point below .20 may cause the task bars and task dependency lines to become compressed and hard to read. If the percentage is set less than 0, this method uses a value of 0, enabling the table area to occupy the entire Gantt chart area. This parameter takes a float value.

Returns

None.

SetDayFormat method: Gantt class

Syntax

SetDayFormat(*Format*)

Description

Use the SetDayFormat method to specify the format of the day on a time line axis.

Parameters

Parameter	Description
<i>Format</i>	Specify the format the day should display in. The values are:

Value	Description
%Chart_DayFormat	Display the day in a one- or two-digit format. Note: This is the default format.
%Chart_DayFormat_2Digit	Note: This constant has been desupported; if specified, it defaults to %Chart_DayFormat.
%Chart_DayFormat_Name	Display the day using the full name, such as Monday, Tuesday, and so on.
%Chart_DayFormat_DOY	Display the day of the year in a numeric format, that is 1–366.
%Chart_DayFormat_DOY_2Digit	Note: This constant has been desupported; if specified, it defaults to %Chart_DayFormat.
%Chart_DayFormat_ShortName	Display the day using the short name, such as Mon, Tue, and so on.

Returns

None.

Related Topics

- [SetMonthFormat method: Gantt class](#)

SetHourFormat method: Gantt class

Syntax

```
SetHourFormat(Format)
```

Description

This method has been desupported and is ignored. The hour format is determined by a user's personalization settings.

Related Topics

- Applications User's Guide: Defining User Preferences

SetMinuteFormat method: Gantt class

Syntax

```
SetMinuteFormat(Format)
```

Description

This method has been desupported and is ignored. The minute format is determined by a user's personalization settings.

Returns

None.

Related Topics

- Applications User's Guide: Defining User Preferences

SetMonthFormat method: Gantt class

Syntax

```
SetMonthFormat(Format)
```

Description

Use the SetMonthFormat method to specify the format of months on a time line axis.

Parameters

Parameter	Description
<i>Format</i>	Specify the format of how the month should be displayed. Values are:

Value	Description
%Chart_MonthFormat	Display the month using a one- or two-digit number. Note: This is the default format.
%Chart_MonthFormat_2Digit	Note: This constant has been desupported; if specified, it defaults to %Chart_MonthFormat.
%Chart_MonthFormat_FullName	Display the month using the full name.
%Chart_MonthFormat_ShortName	Display the month using the short name, such as Jan, Feb, and so on.

Returns

None.

Related Topics

- [SetDayFormat method: Gantt class](#)
- [SetYearFormat method: Gantt class](#)

SetPlannedEndDate method: Gantt class

Syntax

```
SetPlannedEndDate(RecordName.FieldName)
```

Description

Use the SetPlannedEndDate method to specify the field in the record that defines the planned end date. If planned versus actual dates are not used, this method specifies the end date of the task.

This method is required when creating a Gantt chart.

Note

For any task that has a bad date format (from either SetPlannedEndDate or SetPlannedStartDate), any overlaid baseline information is not displayed in the chart section.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that contains the value used to define the planned end date. This field must be of DateTime or Date type.

Returns

None.

Related Topics

- [SetActualEndDate method: Gantt class](#)
- [SetActualStartDate method: Gantt class](#)
- [SetPlannedStartDate method: Gantt class](#)

SetPlannedStartDate method: Gantt class

Syntax

`SetPlannedStartDate(RecordName.FieldName)`

Description

Use the `SetPlannedStartDate` method to specify the field in the record that defines the planned start date. If planned versus actual dates are not used, this method specifies the start date of the task.

This method is required when creating a Gantt chart.

Note

For any task that has a bad date format (from either `SetPlannedEndDate` or `SetPlannedStartDate`), any overlaid baseline information is not displayed in the chart section.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that contains the value used to define the planned start date. This field must be of <code>DateTime</code> or <code>Date</code> type.

Returns

None.

Related Topics

- [SetActualEndDate method: Gantt class](#)
- [SetPlannedEndDate method: Gantt class](#)
- [SetPlannedStartDate method: Gantt class](#)

SetPlannedTaskBarColor method: Gantt class

Syntax

`SetPlannedTaskBarColor(RecordName.FieldName)`

Description

Use the `SetPlannedTaskBarColor` method to specify the field in the record that defines the colors for either the planned task bar or the planned milestone glyph.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the task bar color. This field must be of type number, which mean you can only use the numeric values for specifying color.

Returns

None.

Related Topics

- [SetActualTaskBarColor method: Gantt class](#)
- [TaskMilestoneGlyph property: Gantt class](#)

SetSecondFormat method: Gantt class

Syntax

`SetSecondFormat(Format)`

Description

This method has been desupported and is ignored. The second format is determined by a user's personalization settings.

Related Topics

- Applications User's Guide: Defining User Preferences

SetTableXScrollbar method: Gantt class

Syntax

`SetTableXScrollbar(Scroll_ArrowAmount)`

Description

This method has been desupported and is ignored.

SetTaskAppData method: Gantt class

Syntax

```
SetTaskAppData(RecordName.FieldName1 [, RecordName.FieldName2  
[, RecordName.FieldName3. . .]])
```

Description

Use the SetTaskAppData method to specify the fields in the record that define the application data to be viewed in the table section.

In the table section, column one (or the left-most column) always displays the work breakdown structure (WBS) numbering (if given) and name of the task (or task ID if the name is not given). This method allows applications to define additional task data columns to be displayed in the right-most columns of the table section.

Parameters

Parameter	Description
<i>RecordName.FieldNames</i>	Specify the fields and their associated record that defines one or more application specific fields to be displayed as a column in the table section. The order in which the fields are given as parameters defines their column order in the table section. Because the task name (or task ID if the name is not given) is always shown in column one, the first record field value is displayed in column two.

Returns

None.

Related Topics

- [SetTaskAppDataTitles method: Gantt class](#)
- [SetTaskData method: Gantt class](#)
- [SetTaskDependencyData method: Gantt class](#)

SetTaskAppDataTitles method: Gantt class

Syntax

```
SetTaskAppDataTitles(&TitleArray)
```

Description

Use the SetTaskAppDataTitles method to specify the column titles to be displayed in the table section, starting with column two. The title for column one (that is, the left-most column) in the table section is set using the SetTaskTitle method.

The length of the array should match the number of application data fields specified with the `SetTaskAppData` method. Additional strings beyond the number of application data fields are not displayed. If the number of strings in the array specified by this method is less than the number of application data fields, the blanks are displayed in these title columns.

Parameters

Parameter	Description
<i>&TitleArray</i>	Specify an array of strings containing the column titles to be displayed in the table section.

Returns

None.

Related Topics

- [SetTaskAppData method: Gantt class](#)
- [TaskTitle property: Gantt class](#)

SetTaskBarURL method: Gantt class

Syntax

`SetTaskBarURL(RecordName.FieldName)`

Description

Use the `SetTaskBarURL` method to specify the field in the record which defines the URL the browser redirects to when the user clicks on a task bar.

By default, the `FieldChange` event on the planned end date field of the Gantt task data record is triggered if the image map based interactivity is turned on (using the `IsDrillable` property). This can be overridden by specifying a URL that is triggered when the task bar is clicked.

Use the `SetTaskDependencyURL` method to specify the URL to be used when the user clicks on a dependency line in the chart section.

Parameters

Parameter	Description
<i>Record.FieldName</i>	Specify the field, and its associated record, that defines the URL the browser is redirected to when the task bar is clicked. This field must be of type character. The URL must be an absolute URL.

Returns

None.

Related Topics

- [SetTaskDependencyURL method: Gantt class](#)

- [IsDrillable property: Chart class](#)

SetTaskData method: Gantt class

Syntax

```
SetTaskData({Record.RecordName | &Rowset})
```

Description

Use the SetTaskData method to specify from where the task data is to be populated, either from a record or an already instantiated rowset.

Note

If you specify a rowset, the data in the rowset must be provided in the correct display order.

This method is required when you're creating a Gantt chart.

Parameters

Parameter	Description
<i>RecordName</i> <i>&Rowset</i>	Specify the record or rowset that contains the task data. If you specify a record, you must prefix the record name with the keyword Record.

Returns

None.

Related Topics

- [SetTaskDependencyData method: Gantt class](#)

SetTaskDependencyChildID method: Gantt class

Syntax

```
SetTaskDependencyChildID(RecordName.FieldName)
```

Description

The *dependent* task is the task where the dependency arrow ends. Use the SetTaskDependencyChildID method to specify the field in the record that defines the task ID for the dependent task.

The ID must match up to an ID in the Task data set.

This method is required if you specify dependency data.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the task ID for the dependant task. This field must be of type number.

Returns

None.

Related Topics

- [SetTaskDependencyData method: Gantt class](#)
- [SetTaskDependencyURL method: Gantt class](#)
- [SetTaskDependencyParentID method: Gantt class](#)

SetTaskDependencyData method: Gantt class

Syntax

```
SetTaskDependencyData({RecordName | &Rowset})
```

Description

Use the SetTaskDependencyData method to specify either a record, or an already instantiated rowset, that contains the dependency data.

Note

If you specify a rowset, the data in the rowset must be provided in the correct display order.

Parameters

Parameter	Description
<i>RecordName &Rowset</i>	Specify the record or rowset that contains the task data. If you specify a record, you must prefix the record name with the keyword Record.

Returns

None.

Related Topics

- [SetTaskData method: Gantt class](#)
- [SetTaskDependencyChildID method: Gantt class](#)
- [SetTaskDependencyURL method: Gantt class](#)

- [SetTaskDependencyParentID method: Gantt class](#)

SetTaskDependencyParentID method: Gantt class

Syntax

SetTaskDependencyParentID(*RecordName.FieldName*)

Description

The *depender* task is the task where the dependency arrow originates. Use the SetTaskDependencyParentID method to specify the field in the record that defines the task ID for the depender task.

The ID must match up to an ID in the Task data set.

This method is required if you specify dependency data.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that defines the task ID for the depender task. This field must be of type number.

Returns

None.

Related Topics

- [SetTaskDependencyChildID method: Gantt class](#)
- [SetTaskDependencyData method: Gantt class](#)

SetTaskDependencyType method: Gantt class

Syntax

SetTaskDependencyType(*RecordName.FieldName*)

Description

Use the SetTaskDependencyType method to specify the type of dependency relationship between predecessor and successor tasks.

The values for type are as follows:

Type	Description
Finish-to-Start	The arrow starts at the end of the predecessor task bar and ends at the start of the successor task bar. This is the default value

Type	Description
Finish-to-Finish	The arrow starts at the end of the predecessor task bar and ends at the end of the successor task bar.
Start-to-Start	The arrow starts at the start of the predecessor task bar and ends at the start of the successor task bar.
Start-to-Finish	The arrow starts at the start of the predecessor task bar and ends at the end of the successor task bar.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the type of dependencies between predecessor and successor tasks. This field must be of type integer, and one of the following values:

Value	Description
0 or any value greater than 3	Finish-to-Start
1	Finish-to-Finish
2	Start-to-Start
3	Start-to-Finish

Returns

None.

Related Topics

- [SetTaskDependencyChildID method: Gantt class](#)
- [SetTaskDependencyData method: Gantt class](#)
- [SetTaskDependencyParentID method: Gantt class](#)

SetTaskDependencyURL method: Gantt class

Syntax

```
SetTaskDependencyURL(RecordName.FieldName)
```

Description

Use the SetTaskDependencyURL method to specify the field in the record that defines the URL the browser redirects to when the user clicks on a task bar.

By default, the FieldChange event on the child ID field of the task dependency record is triggered if the image map based interactivity is turned on (using the IsDrillable property). This can be overridden by specifying a URL that is triggered when the task bar is clicked.

Use the `SetTaskBarURL` method to specify the URL to be used when the user clicks on a task bar in the chart section.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the URL the browser is redirected to when the dependency arrow is clicked. This field must be of type character. The URL must be an absolute URL.

Returns

None.

Related Topics

- [SetTaskBarURL method: Gantt class](#)
- [SetTaskDependencyChildID method: Gantt class](#)
- [SetTaskDependencyData method: Gantt class](#)
- [SetTaskDependencyParentID method: Gantt class](#)

SetTaskDrill method: Gantt class

Syntax

```
SetTaskDrill(Recordname.FieldName)
```

Description

Use the `SetTaskDrill` method to specify for which field PeopleCode `FieldEdit` and `FieldChange` events will execute when the user clicks the task bar.

The field can be any field that is loaded in the component buffer.

The system does not change the value in the field when the user clicks the field. Any changes or other processing for the field must be done within the PeopleCode program.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the record name and the field name of the field to be used for field change processing. The field must be available in the component buffer.

Returns

None.

SetTaskExpanded method: Gantt class

Syntax

```
SetTaskExpanded((RecordName.FieldName)
```

Description

This method has been desupported and is ignored.

SetTaskID method: Gantt class

Syntax

```
SetTaskID(RecordName.FieldName)
```

Description

Use the SetTaskID method to specify the field that defines the unique task identifier. The task ID is used to support task linking and dependencies.

Note

The field must be of type number.

This method is required when you're creating a Gantt chart.

Parameters

Parameter	Description
<i>RecordName . FieldName</i>	Specify the record name and the field name of the field that defines the unique task identifier. Note: The field must be of type number.

Returns

None.

Related Topics

- [SetTaskName method: Gantt class](#)

SetTaskLabel method: Gantt class

Syntax

```
SetTaskLabel(RecordName.FieldName)
```


Description

Use the `SetTaskLabel` method to specify the field in the record that defines the task label. The label is displayed alongside its corresponding task bar in the chart area. If a task label is not provided, the task name is used instead. If a task name is not provided, the task id is used.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that contains the task label. This field must be of type character.

Returns

None.

Related Topics

- [SetTaskID method: Gantt class](#)
- [SetTaskName method: Gantt class](#)

SetTaskLevel method: Gantt class

Syntax

```
SetTaskLevel(RecordName.FieldName)
```

Description

Use the `SetTaskLevel` method to specify the field in the record that defines the level for the task. The outermost summary tasks are always defined as task level one. Tasks with task levels greater than one are subtasks. Subtasks may also contain other subtasks.

If a field is not provided to define the level, all tasks are defined at level 1. A maximum of 32 levels are supported.

The following table shows an example of the different levels that could be used, as well as what the parent task level is.

Note

The parent task is not actually part of the data.

Task Name	Task Level	Parent Level
Phase I	1	None
Evaluation	2	Phase I
Research	3	Evaluation
Report Findings	3	Evaluation
Create Budget	2	Phase I

Task Name	Task Level	Parent Level
Approve Budget	3	Create Budget
Phase II	1	None
Code and Test	2	Phase II
Phase III	1	None
Training	2	Phase III

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that contains the information about the task level. This field must be of type number. Up to 32 levels are supported.

Returns

None.

Related Topics

- [SetTaskID method: Gantt class](#)

SetTaskMilestone method: Gantt class

Syntax

```
SetTaskMilestone(RecordName.FieldName)
```

Description

Use the SetTaskMilestone method to specify the field in the record that defines whether the task should be treated as a milestone.

The fields specified by the SetPlannedStartDate and SetActualStartDate methods are used for determining the dates for the planned and actual milestones. The other date fields in the rowset are ignored

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field and its associated record that defines whether the task should be treated as a milestone. The field must be of type Character, and be one character long. The possible values for this field are Y, used to specify that this task is a milestone, or N, if not.

Returns

None.

Related Topics

- [SetActualStartDate method: Gantt class](#)
- [SetTaskMilestone method: Gantt class](#)
- [SetPlannedStartDate method: Gantt class](#)

SetTaskName method: Gantt class

Syntax

```
SetTaskName(RecordName.FieldName)
```

Description

Use the SetTaskName method to specify the field in the record that defines the task name. If you do not specify a task name, the task ID is used in the table section of the Gantt chart.

Although this method is not required, Oracle recommends using it to display meaningful information in the table section of the Gantt chart.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field name and its associated record that defines the task name. The field must be of type character.

Returns

None.

Related Topics

- [SetTaskID method: Gantt class](#)

SetTaskProgress method: Gantt class

Syntax

```
SetTaskProgress(RecordName.FieldName)
```

Description

Use the SetTaskProgress method to specify the field in the record that defines the length of the progress bar for this task as shown in the chart area of the Gantt chart.

The value in the field must be between 0 and 100, inclusive. Zero indicates no progress bar is shown, 100 indicates that the progress bar should cover the entire length of the task bar. Values greater than 100 are automatically converted to 100.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the length of the progress bar for this task. This field must be of type number. The value in the field must be between 0 and 100, inclusive. You must not specify a value greater than 100.

Returns

None.

Related Topics

- [SetTaskProgressBarColor method: Gantt class](#)

SetTaskProgressBarColor method: Gantt class

Syntax

```
SetTaskProgressBarColor(RecordName.FieldName)
```

Description

Use the SetTaskProgressBarColor method to specify the field in the record that defines the color for the progress bar.

For the progress bar to be visible, its color must contrast with the task bar color. No borders are drawn around the progress bar.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field, and its associated record, that defines the task progress bar color. This field must be of type numeric, which means that you can only use the numeric value for the chart colors, not the constant.

Returns

None.

Related Topics

- [SetActualTaskBarColor method: Gantt class](#)
- [SetTaskProgress method: Gantt class](#)

SetWBSNumbering method: Gantt class

Syntax

```
SetWBSNumbering(RecordName.FieldName)
```

Description

Use the SetWBSNumbering method to specify the field in the record that defines the WBS numbering to be displayed for each task row in the table section of the Gantt chart.

A WBS is very similar in structure and layout to a document outline. Each item at a specific level of a WBS is numbered consecutively (that is, 10, 20, 30, 40, 50). Each item at the next level is numbered within the number of its parent item (that is, 10.1, 10.2, 10.3, 10.4). For example:

```
1.
  1.1
    1.1.1
    1.1.2
    1.1.3
  1.2
    1.2.1
    1.2.2
2.
. . .
```

If no field name is provided, WBS numbering is not displayed along with the tasks.

Regardless if WBS numbering is provided, child tasks are indented to the right of their parent task.

Parameters

Parameter	Description
<i>RecordName.FieldName</i>	Specify the field name and its associated record that defines the WBS numbering to be displayed. The field must be of type character.

Returns

None.

SetYearFormat method: Gantt class

Syntax

```
SetYearFormat(Format)
```

Description

Use the SetYearFormat method to specify the format of years on the time line axis.

Parameters

Parameter	Description
<i>Format</i>	Specify the format of how the year should be displayed. Values are:
Value	Description
%Chart_YearFormat	Display the year in a numeric one- or two-digit format.
%Chart_YearFormat_2Digit	Note: This constant has been desupported; if specified, it defaults to %Chart_YearFormat_4Digit.
%Chart_YearFormat_4Digit	Display the year in a numeric four-digit format. Note: This is the default format.

Returns

None.

Related Topics

- [SetDayFormat method: Gantt class](#)
- [SetMonthFormat method: Gantt class](#)

Gantt Class Properties

These properties are used by the Gantt class. The properties are described in alphabetic order.

AdditionalStyleSuffix property: Gantt class

Description

This property has been desupported and is ignored.

AxisEndDateTime property: Gantt class

Description

Use this property to specify the date and time where the time line should end. The value must be of type Date or DateTime.

This property is read/write.

AxisStartDateTime property: Gantt class

Description

Use this property to specify the date and time where the time line should begin. The value must be of type Date or DateTime.

This property is read/write.

DataStartRow property: Gantt class

Description

This property has been desupported and is ignored.

DataWidth property: Gantt class

Description

This property has been desupported and is ignored.

GridLines property: Gantt class

Description

Use this property to specify whether to show grid lines with the chart.

Gantt charts only support the %ChartGrid_Vertical and %ChartGrid_None values.

Grid lines are shown within the chart section of the Gantt chart, if enabled, and are tied to the major tick mark. The major tick mark is associated with the smallest time increment displayed on the time line axis. For example, if both years and months are displayed on the time line axis, the major tick marks denote the months.

If you do not specify a value, no grid lines are shown (%ChartGrid_None).

This property controls only the display of grid lines. If you want to specify the style of the grid lines, use the GridLineType property.

The values are:

Numeric Value	Constant Value	Description
0	%ChartGrid_None	Don't show grid lines (default)
2	%ChartGrid_Vertical	Show vertical grid lines

This property is read/write.

Related Topics

- [GridLineType property: Chart class](#)

GridLineType property: Gantt class

Description

Use this property to specify the style of the grid lines when vertical grid lines are turned on—that is, the GridLines property must be set to %ChartGrid_Vertical.

The default value is %ChartLine_Dash. The possible values are:

Numeric Value	Value	Description
0	%ChartLine_Solid	Draw grid lines with solid lines.

Numeric Value	Value	Description
1	%ChartLine_Dash	Draw grid lines with lines composed of dashes (default).
2	%ChartLine_Dot	Draw grid lines with lines composed of dots.

This property is read/write.

Related Topics

- [GridLines property: Gantt class](#)

Height property: Gantt class

Description

Use this property to specify the height of the chart. This property takes a numeric value. The unit of measurement is pixels.

You can use this property to overwrite the height set in Application Designer.

If you try to read this property before setting it, the value returned is zero.

This property is read/write.

ImageMap property: Gantt class

Description

This property has been desupported and is ignored.

InteractiveEnd property: Gantt class

Description

Use this property to specify whether the user can change the end date of a task by dragging and dropping.

Note

Drag-and-drop is not supported on touch-friendly mobile devices such as an Apple iPad.

This property takes a Boolean value: True if the user can change the end date, False otherwise.

The default value of this property is False.

This property is read/write.

InteractiveMove property: Gantt class

Description

Use this property to specify whether the user can move a task bar by dragging and dropping.

Note

Drag-and-drop is not supported on an Apple iPad.

This property takes a Boolean value: True if the user can move the bar, False otherwise.

The default value of this property is False.

This property is read/write.

InteractiveProgress property: Gantt class

Description

Use this property to specify whether the user can change the progress value of a task by dragging and dropping.

Note

Drag-and-drop is not supported on an Apple iPad.

This property takes a Boolean value: True if the user can change the progress value, False otherwise.

The default value of this property is False.

This property is read/write.

InteractiveStart property: Gantt class

Description

Use this property to specify whether the user can change the start date of a task by dragging and dropping.

Note

Drag-and-drop is not supported on an Apple iPad.

This property takes a Boolean value: True if the user can change the start date, False otherwise.

The default value of this property is False.

This property is read/write.

IsDrillable property: Gantt class

Description

The IsDrillable property is used with the task bars as well as the task dependency lines in the chart section of a Gantt chart. Where the user is directed depends on whether a URL is provided or not, as detailed in this table:

User Action	If URL is not provided:	If URL is provided:
Clicks a task bar.	FieldChange event is associated with the field that is set with SetTaskDrill.	Redirects to URL provided by field identified using the SetTaskBarURL method.
Clicks a task dependency line.	FieldChange event is associated with the Child ID field in the Task Dependency table.	Redirects to URL provided by field identified using the SetTaskDependencyURL method.

This property takes a Boolean value: True if the end-user can click the chart to initiate an action, and False otherwise.

The default value for this property is False.

This property is read/write.

IsPlainImage property: Gantt class

Description

This property has been desupported and is ignored.

PixelsPerRow property: Gantt class

Description

Use this property to set or return the row height for each row in the Gantt chart as Number value representing pixels. The default value is 25 pixels.

This property is read/write.

RevertToPre850 property: Gantt class

Description

This property has been desupported and is ignored.

ShowTaskLabels property: Gantt class

Description

Use this property to specify whether or not task labels are displayed alongside the corresponding task bar in the chart area. This property takes a boolean value; true to display the labels, false to not display the labels. The default is to display the labels.

This property is read/write.

Style property: Gantt class

Description

Use this property to specify the style class that defines the overall appearance attributes of the chart . The value must be a valid style class within the style sheet specified for the chart.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

StyleSheet property: Gantt class

Description

This property has been desupported and is ignored.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

TaskDependencyLineType property: Gantt class

Description

Use this property to specify an integer value that specifies the line type of the line connecting dependent tasks. This value affects all the dependency lines for the entire Gantt chart, not just for a specific set of tasks.

This property is read/write.

See [Styling PeopleSoft Charts](#).

Numeric Value	Constant Value	Description
0	%ChartLine_Solid	Solid line
1	%ChartLine_Dashed	Dashed line
2	%ChartLine_Dotted	Dotted line
3	%ChartLine_Mixed	Mixture of dashes and dots

TaskMilestoneGlyph property: Gantt class

Description

Use this property of type integer to specify which field in the record defines the glyph to represent a task milestone (for both planned and actual milestones). This glyph is used for the entire chart, not just for a specific task.

By default a diamond shaped glyph will be used.

Milestones associated with planned dates use colors defined by the `SetPlannedTaskBarColor` method. Milestones associated with actual dates use colors defined by the `SetActualTaskBarColor` method.

This property is read/write.

Related Topics

- [Using Gantt Glyphs](#)
You can use all of the following glyphs with a Gantt chart. You can use either the numeric or constant value.

TaskTitle property: Gantt class

Description

Use this property to specify the column title to be displayed in column one (that is, the left-most column) in the table section of the Gantt chart. Use the `SetTaskAppDataTitles` method to specify the column titles for the application specific data fields (that is, column two and beyond).

This property is read/write.

Related Topics

- [SetTaskAppDataTitles method: Gantt class](#)

Width property: Gantt class

Description

Use this property to specify the width of the chart. This property takes a numeric value. The unit of measurement is pixels.

Generally this property is used with charts created for iScripts, to specify the width of the image, before generating the image map. You can also use it to overwrite the width set in Application Designer.

If you try to read this property before setting it, the value returned is zero.

This property is read/write.

OrgChart Class Methods

These methods are used by the OrgChart class. The methods are described in alphabetic order.

SetCrumbData method: OrgChart class

Syntax

```
SetCrumbData(&Rowset)
```

Description

Use the SetCrumbData method to specify the source for the data for the organization chart breadcrumbs. Use an already instantiated and populated level-1 component rowset that contains the breadcrumb data.

Parameters

Parameter	Description
<i>&Rowset</i>	A level-1 rowset populated with the breadcrumbs data.

Returns

None.

SetCrumbRecord method: OrgChart class

Syntax

```
SetCrumbRecord(Record.Record_Name)
```

Description

Use the SetCrumbRecord method to specify the derived/working record name that contains the information about the breadcrumbs.

The breadcrumb record is an application-specific derived/work record created using a clone of the PTORGCRMB_SBR subrecord definition.

Parameters

Parameter	Description
<i>Record.Record_Name</i>	Specify the name of the derived/work record that contains the data for the breadcrumbs. You must include the Record keyword.

Returns

None.

SetDropdownData method: OrgChart class

Syntax

SetDropdownData (&Rowset)

Description

Use the SetDropdownData method to specify the source for the data for the organization chart drop-down menus/lists. Use an already instantiated and populated level-1 component rowset that contains the drop-down list data.

Parameters

Parameter	Description
<i>&Rowset</i>	A level-1 rowset populated with the drop-down list data.

Returns

None

SetDropdownRecord method: OrgChart class

Syntax

SetDropDownRecord(Record.*RecordName*)

Description

Use the SetDropdownRecord method to specify the derived/working record name that contains the information about the drop-down menus/lists.

The drop-down record is an application-specific derived/work record created using a clone of the PTORGBOXLIST_SBR subrecord definition.

Parameters

Parameter	Description
<i>Record_Name</i>	Specify the name of the derived/work record that contains the data for the drop-down lists. You must include the Record keyword.

Returns

None

SetIMData method: OrgChart class

Note

This method has been desuported and currently exists for backward compatibility only.

SetIMRecord method: OrgChart class

Note

This method has been desuported and currently exists for backward compatibility only.

SetLegend method: OrgChart class

Syntax

```
SetLegend(&Array_of_String)
```

Description

Use the SetLegend method to specify legend text. Legend text labels the images set using SetLegendImg.

If you do not specify an element for an array (that is, a blank or a null) then no legend is listed for that node.

Note

Legend text is not automatically translated. If you set your own labels, be sure to use translated text, such as message catalog entries.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string, containing the text that you want to use for the legend.

Returns

None.

Example

```
&LegendArray = CreateArray("A", "B", "C", "D ");  
&ocOrgChart.SetLegend (&LegendArray);
```

Related Topics

- [SetDataSeries method: Chart class](#)

SetLegendImg method: OrgChart class

Syntax

```
SetLegendImg(&Array_of_String)
```

Description

Use the SetLegendImg method to specify the legend image names.

Parameters

Parameter	Description
<i>&Array_of_String</i>	An already instantiated array containing the names of the images that you want to use with the legend.

Returns

None.

SetNodeData method: OrgChart class

Syntax

```
SetNodeData(&Rowset)
```

Description

Use the SetNodeData method to specify the source for the node data for the organization chart. Use an already instantiated and populated level-1 component rowset that contains the node data.

This is a required method to build an organization chart.

If you make a change to the underlying data of a chart, call the SetNodeData method again to update the chart.

Parameters

Parameter	Description
<i>&Rowset</i>	A level-1 component rowset populated with the node data. This rowset references the node record of the chart.

Returns

None.

SetNodeDisplayDataRecord method: OrgChart class

Syntax

SetNodeDisplayDataRecord(Record.*Record_Name*)

Description

Use the SetNodeDisplayDataRecord method to specify the node display record.

The node display record is an application-specific derived/work record created using a clone of the PTNODE_DISP_SBR subrecord definition.

This method is required for an organization chart that implements node display templates.

Parameters

Parameter	Description
Record. <i>Record_Name</i>	Specify the name of the derived/work record that contains the node display data for the organization chart. You must include the Record keyword.

Returns

None.

SetNodeDisplayData method: OrgChart class

Syntax

SetNodeDisplayData(*&rsRowset*)

Description

Use the SetNodeDisplayData method to specify the source for the node display data for the organization chart. Use an already instantiated and populated level-1 standalone rowset that contains the node display data.

This method is required for an organization chart that implements node display templates.

If you make a change to the node display data of a chart, call the SetNodeDisplayData method again to update the chart.

Parameters

Parameter	Description
<i>&rsRowset</i>	A level-1 component rowset populated with the node display data. This rowset references the node display record of the organization chart.

Returns

None.

SetNodeRecord method: OrgChart class

Syntax

```
SetNodeRecord(Record.Record_Name)
```

Description

Use the SetNodeRecord method to specify the organization node record.

The node record is an application-specific derived/work record created using a clone of the PTORGNODE_SBR subrecord definition.

This method is required to build an organization chart.

Parameters

Parameter	Description
<i>Record.Record_Name</i>	Specify the name of the derived/work record that contains the data for the organization node. You must include the Record keyword.

Returns

None.

SetNodeViewEntries method: OrgChart class

Syntax

```
SetNodeViewEntries(&NodeViewArray)
```

Description

Use this method to specify the array of string representing the node view IDs.

Parameters

Parameter	Description
<i>&NodeViewArray</i>	Specifies an array of string representing the node view IDs.

Returns

None.

Example

```
&OrgChart.SetNodeViewEntries(&NodeViewArray);  
&OrgChart.SetNodeViewText(&DataHintArray);  
  
&OrgChart.InitialView="VIEW1";
```

Related Topics

- [SetNodeViewText method: OrgChart class](#)
- [InitialView property: OrgChart class](#)
- [Implementing Node Views \(Optional\)](#)
Node views allow you to display alternate information on a node. Using node views, you can determine which attributes to show in the node based on the organization chart's node display template. For instance, one node view might show a person's name, photo, and job information, while another view might show that person's name and contact information.

SetNodeViewText method: OrgChart class

Syntax

```
SetNodeViewText(&DataHintArray)
```

Description

Use this method to specify the array of string representing the data hint (mouse-over text) for each node view.

Parameters

Parameter	Description
<i>&DataHintArray</i>	Specifies an array of string representing the data hint (mouse-over text) for each node view.

Returns

None.

Example

```
&OrgChart.SetNodeViewEntries(&NodeViewArray);  
&OrgChart.SetNodeViewText(&DataHintArray);  
  
&OrgChart.InitialView="VIEW1";
```

Related Topics

- [SetNodeViewEntries method: OrgChart class](#)
- [Implementing Node Views \(Optional\)](#)
Node views allow you to display alternate information on a node. Using node views, you can determine which attributes to show in the node based on the organization chart's node display template. For instance, one node view might show a person's name, photo, and job information, while another view might show that person's name and contact information.

SetPopUpNodeData method: OrgChart class

Syntax

```
SetPopUpNodeData(&Rowset)
```

Description

Use the SetPopUpNodeData method to specify the source for the pop-up node data for the organization chart. Use an already instantiated and populated level-1 component rowset that contains the pop-up node data.

This method is not required if no pop-up chart is available to be displayed in the organization chart.

If you make a change to the underlying data of a pop-up chart, call the SetPopUpNodeData method again to update the chart.

Parameters

Parameter	Description
<i>&Rowset</i>	A level-1 rowset populated with the pop-up node data. This rowset references the pop-up node record of the chart.

Returns

None.

SetPopUpNodeRecord method: OrgChart class

Syntax

```
SetPopUpNodeRecord(Record.Record_Name)
```

Description

Use the SetNodeRecord method to specify the pop-up node record.

The node record is an application-specific derived/work record created using a clone of the PTORGPOPUP_SBR subrecord definition.

This method is not required if no pop-up chart is available to be displayed in the organization chart.

Parameters

Parameter	Description
<i>Record.Record_Name</i>	Specify the name of the derived/work record that contains the data for the pop-up node. You must include the Record keyword.

Returns

None.

SetSchemaLevels method: OrgChart class

Syntax

```
SetSchemaLevels(&Array) ;
```

Description

Use this method to specify the schema levels for an organization chart. Use an array of instantiated SchemaLevel instances. The size of the array is the total number of the schemas defined for this organization chart.

Parameters

Parameter	Description
<i>&Array</i>	An array of instantiated SchemaLevel instances.

Returns

None.

Example

```
SchemaLevel &oSchemaLevel1 = Createobject("SchemaLevel");  
SchemaLevel &oSchemaLevel2 = Createobject("SchemaLevel");  
SchemaLevel &oSchemaLevel3 = Createobject("SchemaLevel");  
SchemaLevel &oSchemaLevel4 = Createobject("SchemaLevel");  
  
/**      Create an instance of of schema zoom level 1 class and instantiate  
it */  
SchemaLevel &oSchemaLevel1 =Createobject("SchemaLevel");  
&oSchemaLevel1.ID=1;
```

```
& oSchemaLevel1.ImageHeight=0;  
.... (add code to instantiate &oSchemaLevel1, &oSchemaLevel2,  
      &oSchemaLevel3, &oSchemaLevel4 instances).  
&SchemaLevels=CreateArray(&oSchemaLevel1, &oSchemaLevel2, &oSchemaLevel3,  
&oSchemaLevel4)  
&ocOrgChart.SetZoomSchemaLevels(&SchemaLevels)
```

Related Topics

- [SchemaLevel Class Properties](#)
These properties are used by the SchemaLevel class. The properties are described in alphabetic order.

OrgChart Class Properties

These properties are used by the OrgChart class. The properties are described in alphabetic order.

CenterFocusNode property: OrgChart class

Description

Specify whether the node with focus displays centered in the chart area.

Value	Direction
0	Center the focus node
2	Do not center the focus node

The focus node is not centered if the chart fits in the chart area without a horizontal scroll, even if CenterFocusNode = 0.

The focus node is not centered if any pop-ups are opened. The display of pop-ups in the visible chart area takes priority over focus node centering.

Note

If multiple pop-ups are opened, the last popup opened is not necessarily set to the visible area. This is determined by the position of the pop-up in the rowset.

The default is 0.

This property is read/write.

ChartCurrentSchemaLevel property: OrgChart class

Description

Set this property to specify the initial schema zoom level.

Valid values are 1 to the number of total schema instances set in the PeopleCode for the organization chart.

When a user selects a different schema level using the zoom control the systems sets the value in the PTCHART_SCHEMA_ID field to the new schema value and sets the value in the CurrentSchemaLevel property to the new schema value, then displays the chart using the new schema level.

If this property is changed to a new value by PeopleCode, the chart is displayed with the new schema level view.

The default value is 1.

Related Topics

- [Implementing Zoom Schemas \(Optional\)](#)
Zoom schemas enable you to define different visual schemas for organization charts.

ChartScrollType property: OrgChart class

Description

Specify whether to use scroll bars or alternative scrolling to move the chart within the visible chart area.

Value	Direction
0	Use scroll bars
1	Use alternative scrolling. This allows the user to use the scroll navigator or to grab the surface of the organization chart background to move the chart in any direction.

Note

To use the mouse hand feature, the chart background color must be specified in the PSORGCHART style sheet. By default, the background color is white.

Note

On an Apple iPad a user navigates using a finger on a touch screen, so scroll bars, the scroll navigator, and mouse hand features are not displayed on an Apple iPad. For an Apple iPad the behavior is the same for both ChartScrollType= 1 and ChartScrollType = 0.

This property takes an integer value.

The default is 0.

This property is read/write.

Collapsed_Msg property: OrgChart class

Description

Specify the data hint for the collapsed icon image.

An error message is issued if Collapsed_Msg is set but CollapsedImage is not set.

The default is "Expand".

This property is read/write.

CollapsedImage property: OrgChart class

Description

Specify a string value for the name of the image that represents a collapsed node. When a user clicks on the collapsed image, the node will be *expanded*.

If the CollapsedImage and ExpandedImage properties are not specified, then no expanded/collapsed icon appears on the node and the expand/collapse actions are disabled.

This property is read/write.

Example

```
&ocOrgChart.CollapsedImage ="PT_COLLAPSED_NODE";
```

CollapseMainIconSpace property: OrgChart class

Description

Specify whether to reduce the space at the top of the node reserved for the main icon. This property is ignored for charts that use a display template.

See "Using Node Display Templates" in [Designing Organization Chart Nodes](#).

Value	Direction
0	Reserve space at the top of the node for the main icon.
1	Reduce the space at the top of the node reserved for the main icon.

This property takes an integer value.

The default is 0.

This property is read/write.

CrumbDescrStyle property: OrgChart class

Description

Use this property to specify the style class name that will be used to control the style of linkable breadcrumbs.

The default style class is PT_ORGCHART_BRDCRM.

Oracle recommends that you use the default breadcrumb style.

This property is read/write.

CrumbMaxDisplayLength property: OrgChart class

Description

Use this property to set the maximum description length that will appear for the breadcrumb.

A breadcrumb description has a maximum of 50 characters in length. If CrumbMaxDisplayLength is set to 30, then only the first 30 characters of the description appear and an ellipsis ("...") is appended.

On mouse-over, the whole text of the breadcrumb appears.

The default is to show the full description.

This property takes a number value.

This property is read/write.

CrumbSeparatorImage property: OrgChart class

Description

Use this property to specify the image name for the image that appears between breadcrumb entries.

If this property is not set, then no image appears between breadcrumb entries. Instead, breadcrumb entries are separated by three spaces.

This property takes a string value.

This property is read/write.

DefaultImage property: OrgChart class

Description

Use this property to set the default image name for the image that will appear if ImageLocation is not 0 and no image is set in the work record.

This property is read/write.

Direction property: OrgChart class

Description

Use this property to specify organization chart orientation.

Value	Orientation
0	Horizontal
2	Vertical

The default is 2 (vertical).

This property is read/write.

DropDownBoxStyle property: OrgChart class

Description

This property is retained for backward compatibility. PeopleTools version 8.52 and later do not use this property.

Specify the style for the drop-down list box header for the organization chart.

Value	Description
PT_ACTION_POSITION	The button appears to left, aligned with the other descriptors.
PT_ACTION_POSITION_RIGHT	The button appears to right.
PT_ACTION_POSITION_CENTER	The button appears in the center of the node.

The default style class is PT_ACTION_POSITION.

This property is read/write.

Expanded_Msg property: OrgChart class

Description

Specify the data hint for the expanded icon image.

An error message is issued if Expanded_Msg is set but ExpandedImage is not set.

The default is "Collapse".

This property is read/write.

ExpandedImage property: OrgChart class

Description

Specify a string value for the name of the image that represents an expanded node. When a user clicks on the expanded image, the node will be *collapsed*.

If the CollapsedImage and ExpandedImage properties are not specified, then no expanded/collapsed icon appears on the node and the expand/collapse actions are disabled.

This property is read/write.

Example

```
&ocOrgChart.ExpandedImage ="PT_EXPANDED_NODE";
```

FocusNodeStyle property: OrgChart class

Description

Use this property to specify the style class name that will be used to control the focus node.

The default style class is PT_ORGNODE_SELECT.

This property is read/write.

HasLegend property: OrgChart class

Description

Use this property to specify if a legend appears with the chart. This property takes a Boolean value: True if the legend appears with the chart, and False otherwise.

The default value is False.

This property is read/write.

Height property: OrgChart class

Description

Use this property to specify the height of the chart. This property takes a numeric value. The unit of measurement is pixels.

If you try to read this property before setting it, the value returned is 0.

This property is read/write.

Related Topics

- [Height property: Chart class](#)

ImageHeight property: OrgChart class

Description

Use this property to specify the height of the node image. This property takes a numeric value. The unit of measurement is pixels.

Note

If ImageHeight is very large relative to the chart, data hints may not have room to display properly. If this occurs, you need to reduce ImageHeight or increase chart size.

The default is 0.

This property is read/write.

Related Topics

- [Height property: Chart class](#)

ImageLocation property: OrgChart class

Description

Use this property to specify chart node image location:

Value	Direction
0	No image
1	Image on the left
2	Image on the right

The default is 0 (No image).

This property is read/write.

ImageMouseoverMagnificationFactor property: OrgChart class

Description

Use this property to specify the mouse-over magnification factor on the node image. This property takes a numeric value. A value of 100 produces a mouse-over image the same size as the node image. If the value is set to 0 or 100, no image magnification will occur.

Note

ImageMouseoverMagnificationFactor is ignored on the Apple iPad. On an Apple iPad the user is able to zoom the entire page to enlarge the image.

Valid values are 0 to 1000.

The default is 0.

This property is read/write.

Related Topics

- [Height property: Chart class](#)

IMPresence property: OrgChart class

Note

This property has been desupported and currently exists for backward compatibility only.

IMRefreshInterval property: OrgChart class

Note

This property has been desupported and currently exists for backward compatibility only.

InitialView property: OrgChart class

Description

Use this property to set or return the initial node view ID as a string.

This property is read/write.

Example

```
&OrgChart.InitialView="VIEW1";
```

Related Topics

- [SetNodeViewEntries method: OrgChart class](#)
- [Implementing Zoom Schemas \(Optional\)](#)
Zoom schemas enable you to define different visual schemas for organization charts.

LegendPosition property: OrgChart class

Description

The OrgChart class only supports %ChartLegend_Top, which is to display the legend on top of the chart.

This property is read/write.

LegendStyle property: OrgChart class

Description

Use this property to specify the style of the legend. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGCHART_LEGEND.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

LegendTopSpace property: OrgChart class

Description

Use this property to set the space between the breadcrumb and legend.

The default is no space between the legend and the breadcrumbs.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

MainTitle property: OrgChart class

Description

Use this property to specify the text for the main title of the chart.

This property takes a string value.

This property is read/write.

MainTitleStyle property: OrgChart class

Description

Use this property to specify the style of the main title. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default value is "PT_ORGCHART_TITLE".

This property is read/write.

MaxDropdownDisplayItem property: OrgChart class

Description

Specify the maximum number of list items that will appear in the drop down box before the up-and-down arrow vertical scrolling is implemented.

This property is retained for backward compatibility. PeopleTools version 8.52 and later charts do not use this property.

This property takes an integer value.

The default value is 7.

This property is read/write.

MaxPopupDisplayNode property: OrgChart class

Description

The maximum number of nodes to be displayed in the pop-up before a vertical scrollbar appears in the pop-up.

For instance, if MaxPopupDisplayNode is set to 3 and the pop-up has more than 3 nodes, then the pop-up will only display the first 3 nodes with a scrollbar in the pop-up so the user can scroll down to see the other nodes.

The default value is 3.

This property is read/write.

NodeDescr1Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 1.

NodeDescrnStyle properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC1.

This property is read/write.

NodeDescr2Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 2.

NodeDescrnStyle properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC2.

This property is read/write.

NodeDescr3Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 3.

NodeDescr*n*Style properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC3.

This property is read/write.

NodeDescr4Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 4.

NodeDescr*n*Style properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC4.

This property is read/write.

NodeDescr5Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 5.

NodeDescr*n*Style properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC5.

This property is read/write.

NodeDescr6Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 6.

NodeDescr*n*Style properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC6.

This property is read/write.

NodeDescr7Style property: OrgChart class

Description

The style class name that will be used to control the style of the main chart node descriptor number 7.

NodeDescr*n*Style properties are ignored with charts that use a node display template. Instead, use the PT_CNT_STYLE field in the display template.

Each node can have up to seven descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGNODE_DESC7.

This property is read/write.

NodeMaxDisplayDescLength property: OrgChart class

Description

Set the maximum descriptor length that will appear in the node.

This property is ignored on charts that use a display template. Instead use the PT_DESCR_MAX display template field to limit descriptor length.

If the full descriptor text is longer than NodeMaxDisplayDescLength, then an ellipsis (“...”) is appended to the displayed text. The entire text appears in a data hint.

The default value is 50 characters.

This property is read/write.

NodeProportion property: OrgChart class

Description

Use the NodeProportion property to control whether nodes can have varying sizes or are sized uniformly.

Value	Direction
0	Node size is variable, based on the content of each node.
1	Node height is uniform, based on the tallest node.
2	Node width is uniform, based on the widest node.
3	Node height and width are uniform.
4	Nodes are square, based on the largest node height or width.

This property takes an integer value.

The default is 0.

This property is read/write.

OptimizeHorizontalSpace property: OrgChart class

Description

Set this property to automatically maximize or minimize the chart area horizontally.

Value	Direction
0	Use the specified size.
1	Expand horizontally to the right edge of the browser page. This option should only be used when there is only blank space to the right of the chart. Otherwise, any objects in that area will be pushed off the viewable area.
2	Contract horizontally to just to the right of the node furthest to the right.
3	Fit the chart area to the chart horizontally.

This property takes an integer value.

The default is 0.

This property is read/write.

OptimizeVerticalSpace property: OrgChart class

Description

Set this property to automatically maximize or minimize the chart area vertically.

Value	Direction
0	Use the specified size.
1	Expand vertically to the bottom edge of the browser page. This option should only be used when there is only blank space at the bottom of the chart. Otherwise, any objects in that area will be pushed off the viewable area.
2	Contract vertically to just below the bottom of the last visible chart node.
3	Fit the chart area to the chart vertically.

This property takes an integer value.

The default is 0.

This property is read/write.

PopupHeaderStyle property: OrgChart class

Description

The style class that will be used to control the style of the pop-up header and the header descriptor.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_HEADER.

This property is read/write.

PopupNodeDescr1Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 1.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC1.

This property is read/write.

PopupNodeDescr2Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 2.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC2.

This property is read/write.

PopupNodeDescr3Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 3.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC3.

This property is read/write.

PopupNodeDescr4Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 4.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC4.

This property is read/write.

PopupNodeDescr5Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 5.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC5.

This property is read/write.

PopupNodeDescr6Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 6.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC6.

This property is read/write.

PopupNodeDescr7Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 7.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC7.

This property is read/write.

PopupNodeDescr8Style property: OrgChart class

Description

The style class name that will be used to control the style of the pop-up node descriptor number 8.

Each node can have up to eight descriptors, each with its own style.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_POPUPNODE_DESC8.

This property is read/write.

Style property: OrgChart class

Description

Use this property to specify the style class that defines the overall appearance attributes of the chart. The value must be a valid style class within the style sheet specified for the chart.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

SuppressPeopleCodeOnNode property: OrgChart class

Description

Specify whether to suppress processing, such as re-centering the chart, when a user clicks on a chart node if no PeopleCode is associated with the node.

This property takes a Boolean value: True to suppress a click on a chart node, and False otherwise.

The default value is False.

This property is read/write.

SuppressPeopleCodeOnImage property: OrgChart class

Description

Specify whether to suppress a processing, such as re-centering the chart, when a user clicks on a chart image if no PeopleCode is associated with the image.

This property takes a Boolean value: True to suppress a click on a chart image, and False otherwise.

The default value is False.

This property is read/write.

UnlinkCrumbDescrStyle property: OrgChart class

Description

Use this property to specify the style class name that will be used to control the style of the unlinkable breadcrumb.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_ORGCHART_UNLINK_BRDCRM.

Oracle recommends that you use the default breadcrumb unlinkable style.

This property is read/write.

VerticalSpace property: OrgChart class

Description

Use this property to specify the amount of space above the first level of nodes in an organization chart. If the chart has a legend, the vertical space is measured as the distance from the top of the first level of nodes to the bottom of the legend. If the chart has no legend, the vertical space is the distance from the top of the first level of nodes to the top of the chart area.

This property only applies to charts with a vertical orientation (Direction = 2).

This property takes a numeric value. The unit of measurement is pixels.

The default value is 10 pixels.

This property is read/write.

Width property: OrgChart class

Description

Use this property to specify the width of the chart. This property takes a numeric value. The unit of measurement is pixels.

If you try to read this property before setting it, the value returned is 0.

This property is read/write.

SchemaLevel Class Properties

These properties are used by the SchemaLevel class. The properties are described in alphabetic order.

ID property: SchemaLevel class

Description

Use this property to specify the ID for the schema level.

Specify a number from 1 – n , where n is the number of schema levels defined for the chart. n must be in the range 1 – 10.

This property is read/write.

ImageHeight property: SchemaLevel class

Description

Use this property to specify the height of the node image (photo) displayed for the schema level.

Specify the height of the node image (photo) displayed, in pixels, for this schema level.

This property is read/write.

RatingBoxChart Class Methods

These methods are used by the RatingBoxChart class. The methods are described in alphabetic order.

SetLegend method: RatingBoxChart class

Syntax

```
SetLegend(&Array_of_String)
```

Description

Use the SetLegend method to specify legend text. Legend text labels the images set in the RatingBoxChart class method SetLegendImg.

Note

Legend text is not automatically translated. Be sure to use translated text, such as message catalog entries.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string, containing the text that you want to use for the legend.

Returns

None.

Example

```
&LegendArray = CreateArray("A", "B", "C", "D");  
&oRatingBoxChart.SetLegend(&LegendArray);
```

Related Topics

- [SetDataSeries method: Chart class](#)
- [SetLegendImg method: RatingBoxChart class](#)

SetLegendImg method: RatingBoxChart class

Syntax

```
SetLegendImg(&Array_of_String)
```

Description

Use the SetLegendImg method to specify the legend image names.

Parameters

Parameter	Description
<i>&Array_of_String</i>	An already instantiated array containing the names of the images that you want to use with the legend.

Returns

None.

SetQuadrantSchemas method: RatingBoxChart class

Syntax

```
SetQuadrantSchemas(&Quadrant_Array)
```

Description

Use the SetQuadrantSchemas method to specify an array of QuadrantSchema objects to be used with this rating box chart.

Not all quadrants within the rating box chart require a QuadrantSchema object. Moreover, the QuadrantSchema objects in the array can be specified in any order.

Parameters

Parameter	Description
<i>&Quadrant_Array</i>	An already instantiated array of QuadrantSchema objects.

Returns

None.

Example

```
&QuadrantSchemas = CreateArray(&q_schema1, &q_schema2, &q_schema3,  
&q_schema4, &q_schema5, &q_schema6);  
  
&oRatingBoxChart.SetQuadrantSchemas(&QuadrantSchemas);
```

Related Topics

- [Using the QuadrantSchema Class](#)
You can attach instances of the QuadrantSchema class to your rating box chart to provide additional information to users. Specifically, you can label quadrants in the rating box chart.
- [QuadrantSchema Class Properties](#)
These properties are used by the QuadrantSchema class. The properties are described in alphabetic order.

SetRBNodeData method: RatingBoxChart class

Syntax

```
SetRBNodeData(&Rowset)
```

Description

Use the SetRBNodeData method to specify the level 1 component rowset that is the source for the node data for the rating box chart.

If you make a change to the underlying data of a chart, call the SetRBNodeData method again to update the chart.

Parameters

Parameter	Description
<i>&Rowset</i>	An already instantiated and populated component rowset object that references the rating chart node record.

Returns

None.

SetRBNodeRecord method: RatingBoxChart class

Syntax

```
SetRBNodeRecord(Record.RecordName)
```

Description

Use the SetRBNodeRecord method to specify the record that is to contain the node data for the rating box chart.

Parameters

Parameter	Description
<i>Record.RecordName</i>	Specify the name of the record to be used as the node record.

Returns

None.

SetXAxisLabels method: RatingBoxChart class

Syntax

```
SetXAxisLabels(&Array_of_String)
```

Description

Use the SetXAxisLabels method to specify an array of labels for the x-axis.

Note

The labels will not be displayed if the ShowAxisLabels property is explicitly set to False.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string that contain the labels that you want to use for the x-axis. The array size must match the value in the XAxisBoxNum property. If they do not match, the system throws a runtime error.

Returns

None.

Related Topics

- [ShowAxisLabels property: RatingBoxChart class](#)

SetYAxisLabels method: RatingBoxChart class

Syntax

```
SetYAxisLabels(&Array_of_String)
```

Description

Use the SetYAxisLabels method to specify an array of labels for the y-axis.

Note

The labels will not be displayed if the ShowAxisLabels property is explicitly set to False.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string that contain the labels that you want to use for the y-axis. The array size must match the value in the YAxisBoxNum property. If they do not match, the system throws a runtime error.

Returns

None.

Related Topics

- [ShowAxisLabels property: RatingBoxChart class](#)

RatingBoxChart Class Properties

These properties are used by the RatingBoxChart class. The properties are described in alphabetic order.

BoxMaxDisplayItems property: RatingBoxChart class

Description

Specify how many nodes are to be shown in the displayable area of the quadrant. When the number of nodes to be shown exceeds BoxMaxDisplayItems, a link labeled "View all (N)" appears at the bottom right of the quadrant, where *N* is the total number of nodes in the quadrant. The user can click the link to launch a pop-up that contains all the nodes. A scrollbar enables the user to scroll through all the nodes in the list.

Only one pop-up window will appear in the rating box chart, so when the user clicks another "View all (N)" link in another quadrant, the previous pop-up window closes and the new pop-up window opens at the center of the quadrant.

If an invalid (negative) value is specified, an error will be thrown at runtime.

The default value is 1.

This property is read/write.

DraggedNodeStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of a node as it is being dragged.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_DRAGGED_NODE.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

EnableRelatedActions property: RatingBoxChart class

Description

Specify a Boolean value indicating whether a user can click on a node in the rating box chart to invoke related actions on the node. The default value is False.

To enable related actions on a rating box chart, you must do the following:

- Set the IsDragable property to False.
- Set the EnableRelatedActions property to True.
- Use the Manage Related Content Service component to configure related actions on the PTCHART_NODE page field of the page displaying the rating box chart.

Related Topics

- [IsDragable property: RatingBoxChart class](#)
- Portal Technology: Assigning Related Content to Classic Components and Pages

GridLineType property: RatingBoxChart class

Description

Use this property to specify the style of the grid lines.

The default value is %ChartLine_Solid. The possible values are:

Value	Description
%ChartLine_Solid	Draw grid lines with solid lines.
%ChartLine_Dash	Draw grid lines with lines composed of dashes.
%ChartLine_Dot	Draw grid lines with lines composed of dots.

This property is read/write.

HasLegend property: RatingBoxChart class

Description

Use this property to specify if a legend appears with the chart. This property takes a Boolean value: True if the legend appears with the chart, and False otherwise.

The default value is False.

This property is read/write.

Height property: RatingBoxChart class

Description

Use this property to specify the height of the chart. This property takes a numeric value. The unit of measurement is pixels.

The default value is the height of the chart control on the page definition.

If you set a chart height value that cannot fit the x-axis and label areas of the chart, a runtime error is thrown and the chart is not rendered.

If you set a negative value, a runtime error is thrown and the chart is not rendered.

If you try to read this property before setting it, the value returned is 0.

This property is read/write.

Related Topics

- [Height property: Chart class](#)

IconOnlySelectedQuadrantStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of border properties of the selected quadrant of an icon-only rating box chart when the system displays the view all pop-up.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default is PT_RATBOX_ICONONLY_BOX.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

IsDragable property: RatingBoxChart class

Description

Specify whether nodes in the rating box chart can be dragged and dropped. If the property is specified as *True*, then user will be able to drag a node in the rating box chart and drop it to another quadrant. If the property is *False*, then the drag and drop action is disabled.

The default value is *True*.

This property is read/write.

Related Topics

- [Height property: Chart class](#)

LegendPosition property: RatingBoxChart class

Description

Use this property to specify where the legend should appear in relationship to the chart. You can specify either a numeric or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
2	%ChartLegend_Top	Display legend at the top of the chart.
3	%ChartLegend_Bottom	Display legend below the chart.

If you set a value other than 2 or 3, a runtime error is thrown and the chart is not rendered.

This property is read/write.

MainTitle property: RatingBoxChart class

Description

Use this property to specify the text for the main title of the chart.

This property takes a string value.

This property is read/write.

MainTitleStyle property: RatingBoxChart class

Description

Use this property to specify the style of the main title. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_TITLE.

This property is read/write.

NMaxDisplayDescLength property: RatingBoxChart class

Description

Specify the maximum number of characters that will display for the description.

When the ShowNodeDescription chart property is set to True, then both the icon and the description of the node will appear in the quadrant.

If the description is larger than NMaxDisplayDescLength then the node displays the number of characters specified in NMaxDisplayDescLength, followed by an ellipsis.

If the full node description or the number of characters specified in NMaxDisplayDescLength cannot fit in a quadrant at runtime the description is automatically truncated. An ellipsis (...) follows the truncated text.

You only need to set this property if you want the truncated text to be less than the automatically truncated text.

When the user mouses over the truncated node description, the whole text displays in a data hint.

If an invalid (negative) value is specified, an error will be thrown at runtime.

The default value is 50.

This property is read/write.

PopUpHeaderStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of the pop-up header.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_POPUP_HEADER.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

PopUpHeight property: RatingBoxChart class

Description

Specify the height of the pop-up chart in pixels.

This parameter takes a number value.

The recommended value is half of the rating box chart height.

If you set a pop-up chart height value that cannot fit the x-axis area of the popup chart, a runtime error is thrown.

The default value is 0. If a negative value is specified, an error will be thrown at runtime.

This property is read/write.

PopUpStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of the pop-up.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_POPUP.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

PopUpWidth property: RatingBoxChart class

Description

Specify the width of the pop-up chart in pixels.

This parameter takes a number value.

The recommended value is half of the rating box chart width.

If you set a pop-up chart width value that cannot fit the y-axis area of the popup chart, a runtime error is thrown.

The default value is 0. If a negative value is specified, an error will be thrown at runtime.

This property is read/write.

SelectedQuadrantStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of the quadrant when it is selected.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_SELECTED_BOX.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

ShowAxisLabels property: RatingBoxChart class

Description

Specify a Boolean value indicating whether the rating box chart should show the x- and y-axis labels. The default value is True.

This property is read/write.

Related Topics

- [SetXAxisLabels method: RatingBoxChart class](#)
- [SetYAxisLabels method: RatingBoxChart class](#)

ShowNodeDescription property: RatingBoxChart class

Description

Specify whether the chart should show the node description. This property takes a Boolean value.

Value	Description
True	Both the icon and description for the node appear.
False	Only the icon for the node appears.

The default value is True.

This property is read/write.

Style property: RatingBoxChart class

Description

Use this property to specify the style class that defines the overall appearance attributes of the chart . The value must be a valid style class within the style sheet specified for the chart.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically,

they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

ViewAllStyle property: RatingBoxChart class

Description

Use this property to specify the style class that controls the appearance of the **View All** link.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_VIEWALL_DESCR.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

Width property: RatingBoxChart class

Description

Use this property to specify the width of the chart. This property takes a numeric value. The unit of measurement is pixels.

The default value is the width of the chart control on the page definition.

If you set a chart width value that cannot fit the y-axis and label areas of the chart, a runtime error is thrown.

If a negative value is specified, an error will be thrown at runtime and the chart will not be rendered.

If you try to read this property before setting it, the value returned is 0.

This property is read/write.

XAxisBoxNum property: RatingBoxChart class

Description

Specify the number of quadrants in the x-axis.

This property is required. The value must be equal to or greater than 1.

If a value less than 1 is specified, an error will be thrown at runtime.

This property is read/write.

XAxisLabelStyle property: RatingBoxChart class

Description

Use this property to specify the style of the x-axis label. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_XAXIS.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

XAxisTitle property: RatingBoxChart class

Description

Use this property to specify the text for the x-axis title.

This property is read/write.

XAxisTitleStyle property: RatingBoxChart class

Description

Use this property to specify the style of the x-axis title. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_XTTL.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

YAxisBoxNum property: RatingBoxChart class

Description

Specify the number of quadrants in the y-axis.

This property is required. The value must be equal to or greater than 1.

If a value less than 1 is specified, an error will be thrown at runtime.

This property is read/write.

YAxisLabelStyle property: RatingBoxChart class

Description

Use this property to specify the style of the y-axis label. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_YAXS.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

YAxisTitle property: RatingBoxChart class

Description

Use this property to specify text of the title for the y-axis.

This property is read/write.

YAxisTitleStyle property: RatingBoxChart class

Description

Use this property to specify the style of the y-axis title. The values for this property are the style classes contained in the style sheet associated with the chart.

The values for this property are controlled by the specified style class in the style sheet associated with the chart.

The default style class is PT_RATBOX_YTITL.

This property is read/write.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

QuadrantSchema Class Properties

These properties are used by the QuadrantSchema class. The properties are described in alphabetic order.

Related Topics

- [Using the QuadrantSchema Class](#)
You can attach instances of the QuadrantSchema class to your rating box chart to provide additional information to users. Specifically, you can label quadrants in the rating box chart.
- [SetQuadrantSchemas method: RatingBoxChart class](#)

LabelPosition property: QuadrantSchema class

Description

Use this property to specify the position for the label for this quadrant as a Integer. You can specify either an Integer or constant value for this property.

The values are:

Numeric Value	Constant Value	Description
0	%Top_Left	Position the label in the top left corner of the quadrant. Note: %Top_Left is the default value.
1	%Top_Right	Position the label in the top right corner of the quadrant.
2	%Bottom_Left	Position the label in the bottom left corner of the quadrant.
3	%Bottom_Right	Position the label in the bottom right corner of the quadrant.

This property is read/write.

LabelStyle property: QuadrantSchema class

Description

Use this property to specify a style class for the label for this quadrant as a String. The default value is PT_RATBOX_LABEL.

This property is read/write.

LabelText property: QuadrantSchema class

Description

Use this property to specify a label for this quadrant as a String.

This property is read/write.

XRating property: QuadrantSchema class

Description

Use this property to specify the x rating for this quadrant as a String. The value for this property needs to be in the array of values for the x-axis specified by the `SetXAxisLabels` method; otherwise, a runtime error occurs.

This property is read/write.

Related Topics

- [SetXAxisLabels method: RatingBoxChart class](#)

YRating property: QuadrantSchema class

Description

Use this property to specify the y rating for this quadrant as a String. The value for this property needs to be in the array of values for the y-axis specified by the `SetYAxisLabels` method; otherwise, a runtime error occurs.

This property is read/write.

Related Topics

- [SetYAxisLabels method: RatingBoxChart class](#)

Timeline Class Methods

In this section, the Timeline class methods are presented in alphabetical order.

SetData method: Timeline class

Syntax

```
SetData({Record_Name | &Rowset})
```

Description

Use the `SetData` method to specify where the data for the chart is coming from.

You can use either a record name or an already instantiated, populated rowset. In general, specify a record when building a chart from page data and a rowset when building a chart from a standalone rowset.

If you make a change to the underlying data of a chart, call the `SetData` method again to update the chart.

Parameters

Parameter	Description
<i>Record_Name</i>	Specify the name of a record to be used to populate the timeline with data.
<i>&Rowset</i>	Specify the name of an already instantiated rowset to populate the timeline with data. This is generally a standalone rowset.

Returns

None.

Example

```
&oChart.SetData(Record.QE_COL_MULTI_2Y);
```

SetDataSeries method: Timeline class

Syntax

```
SetDataSeries(Record_Name.Field_Name)
```

Description

Use the `SetDataSeries` method to specify the identifier for the timeline series. Every distinct value in this field is considered a unique series. Only a maximum of two series is allowed.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and the field on that record that contains the series values for a timeline item.

Returns

None.

Example

```
&oChart.SetDataSeries(RECORD.FIELD);
```

SetDataItemStart method: Timeline class

Syntax

```
SetDataItemStart(Record_Name.Field_Name)
```


Description

Use the `SetDataItemStart` method to specify the `Datetime` field in the record that defines the start time for a timeline item.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and the field on that record that contains the start time value for a timeline item. The field must be of type <code>Datetime</code> .

Returns

None.

Example

```
&oChart.SetDataItemStart(RECORD.FIELD);
```

SetDataItemDescription method: Timeline class

Syntax

```
SetDataItemDescription(Record_Name.Field_Name)
```

Description

Use the `SetDataItemDescription` method to specify the description for a timeline item.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and the field on that record, which contains the description of a timeline item.

Returns

None.

Example

```
&oChart.SetDataItemDescription(RECORD.FIELD);
```

SetDataItemTitle method: Timeline class

Syntax

```
SetDataItemTitle(Record_Name.Field_Name)
```

Description

Use the SetDataItemTitle method to specify the title text to display for a time line item.

Parameters

Parameter	Description
<i>Record_Name.Field_Name</i>	Specify the name of the record and the field on that record, which contains the title for a time line item.

Returns

None.

Example

```
&oChart.SetDataItemTitle(RECORD.FIELD);
```

SetSeriesEmptyText method: Timeline class

Syntax

```
SetSeriesEmptyText(&Array_of_String)
```

Description

Use the SetSeriesEmptyText method to specify the text to display for an empty timeline series. For a timeline with only one series, use the *TimelineEmptyText* property.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string containing the text that you want to display for an empty timeline series.

Returns

None.

Example

```
&oChart.SetSeriesEmptyText(CreateArray("Timeline Empty 1", "Timeline Empty 2"));
```

Related Topics

- [TimelineEmptyText property: Timeline class](#)

SetSeriesLabels method: Timeline class

Syntax

```
SetSeriesLabels(&Array_of_String)
```

Description

Use the SetSeriesLabels method to specify the labels to display for a timeline series. For a timeline with only one series, use the *TimelineLabel* property.

Parameters

Parameter	Description
<i>&Array_of_String</i>	Specify an already instantiated array of string containing the labels to display for the timeline series.

Returns

None.

Example

```
&oChart.SetSeriesLabels(CreateArray("TimeLine Series 1", "TimeLine Series 2"));
```

Related Topics

- [TimelineLabel property: Timeline class](#)

Timeline Class Properties

In this section, the TimeLine class properties are presented in alphabetical order.

AspectRatio property: Timeline class

Description

Use this property to specify a Float value indicating the height of the chart as a proportion of its width.

If the aspect ratio is not defined, a default value of 1 is used on fluid pages.

Note

AspectRatioPortrait is ignored on classic pages; instead, the height is determined by the height of the chart page control defined in Application Designer or by the Height and Width properties.

This property is read/write.

Example

```
&oChart.AspectRatio = 0.8;
```

End property: Timeline class

Description

Use this property to specify the end time for the timeline. The value must be of type Date or DateTime.

This property is read/write, and is required.

Example

```
&oChart.End = "2019-01-13 11:00:00";
```

Height property: Timeline class

Description

On a classic page, use this property to specify a number value indicating the height of the timeline in pixels.

This property is read/write.

Example

```
&oChart.Height = 800;
```

Related Topics

- [Width property: Timeline class](#)
- [AspectRatio property: Timeline class](#)

MajorAxisScale property: Timeline class

Description

Use this property to specify a string value indicating the time scale of the major axis.

The values are case sensitive, and it should be in lower case. The valid values are:

- days

- hours
- minutes
- months
- quarters
- seconds
- weeks
- years

If a value is not specified, the axis labels are not displayed above the minor axis or in the overview.

This property is read/write, and is required.

Example

```
&oChart.MajorAxisScale = "quarters";
```

MinorAxisScale property: Timeline class

Description

Use this property to specify a string value indicating the time scale of the minor axis.

The values are case sensitive, and it should be in lower case. The valid values are:

- days
- hours
- minutes
- months
- quarters
- seconds
- weeks
- years

If a value is not specified, the chart is not rendered.

This property is read/write, and is required.

Example

```
&oChart.MinorAxisScale = "weeks";
```

MinorAxisZoomOrder property: Timeline class

Description

An array of strings containing the names of scales used for zooming from longest to shortest.

This property is read/write.

Example

```
oChart.MinorAxisZoomOrder = CreateArray("quarters", "months", "weeks",  
"days");
```

Orientation property: Timeline class

Description

Use this property to specify whether the timeline is displayed horizontally or vertically. You can specify a constant value for this property.

Valid values are:

- `%Chart_Horizontal` - The timeline is displayed horizontally.
- `%Chart_Vertical` - The timeline is displayed vertically.

This property is read/write.

Example

```
&oChart.Orientation = %Chart_Vertical;
```

Start property: Timeline class

Description

Use this property to specify the start time for the timeline. The value must be of type `Date` or `DateTime`.

This property is read/write, and is required.

Example

```
&oChart.Start= "2015-01-13 11:00:00";
```

Related Topics

- [End property: Timeline class](#)

TimelineEmptyText property: Timeline class

Description

Use this property to specify the text for an empty timeline series. For a timeline with more than one series, use the *SetSeriesEmptyText* method.

This property is read/write.

Related Topics

- [SetSeriesEmptyText method: Timeline class](#)

TimelineLabel property: Timeline class

Description

Use this property to specify the label to display on the timeline series. For a timeline with more than one series, use the *SetSeriesLabels* method.

This property is read/write.

Example

```
&oChart.TimelineLabel = "TimeLine Series";
```

Related Topics

- [SetSeriesLabels method: Timeline class](#)

Width property: Timeline class

Description

On a classic page, use this property to specify a number value indicating the width of the timeline in pixels.

This property is read/write.

Example

```
&oChart.Width = 800;
```

Related Topics

- [Height property: Timeline class](#)
- [AspectRatio property: Timeline class](#)

Charting Examples

This section includes example of charts, with the PeopleCode used to create them.

Creating a Chart Using the Chart Class

This section demonstrates how to create a simple chart based on the Chart class. This chart is meant to be used to demonstrate basic principles of creating charts and give an opportunity to experiment with different chart types. It is not typical of how a chart is used in PeopleSoft applications.

The first six steps also apply to creating charts using the Gantt class, the OrgChart class, and the RatingBoxChart class.

The steps to create a chart are:

1. Place a chart control on a page.
2. Associate the chart control with a record field.

3. Create the chart data record.
4. Add PeopleCode to instantiate a chart object.
5. Set the data source.
6. View the page in the browser.
7. Add data for the chart.
8. Specify the series data.
9. Specify chart colors.
10. Add text elements.
11. Review the complete program.

Placing a Chart Control on a Page


In Application Designer, create a new page.

Select Insert, Chart and draw a rectangle to represent the area the chart will occupy. The chart can be any size, and you can have more than one chart on a page.

Place the page on a component and register the component.

Associating the Chart Control with a Record Field

Each chart on a component must be associated with a unique field. Double-click the chart control to access the Chart Properties dialog box and enter a record name and field name.

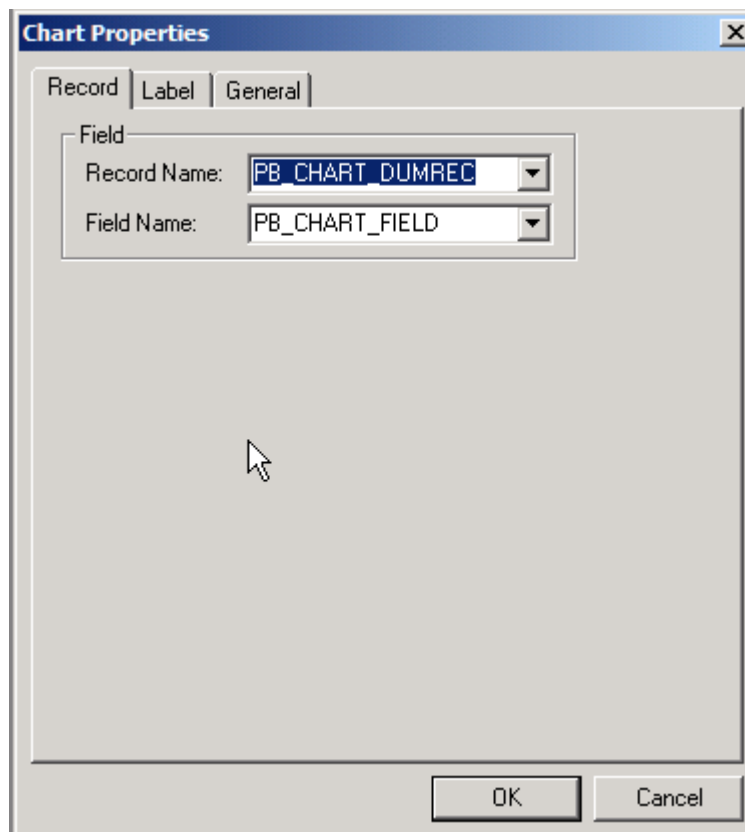

The chart field has no special requirements. Its only purpose is to provide a reference to the field in PeopleCode.


This sample chart uses a derived/work record named DOC_CHRT_WRK that is dedicated to this purpose.

Creating the Chart Data Record

The chart needs either a record or a rowset to serve as the data source. This sample chart uses a record. See the Chart class SetData method for details about using a rowset.

See [SetData method: Chart class](#).

At a minimum, the record must have fields for the x-axis data and the y-axis data. Optionally, the record can have fields for series data, chart color, and glyph size.

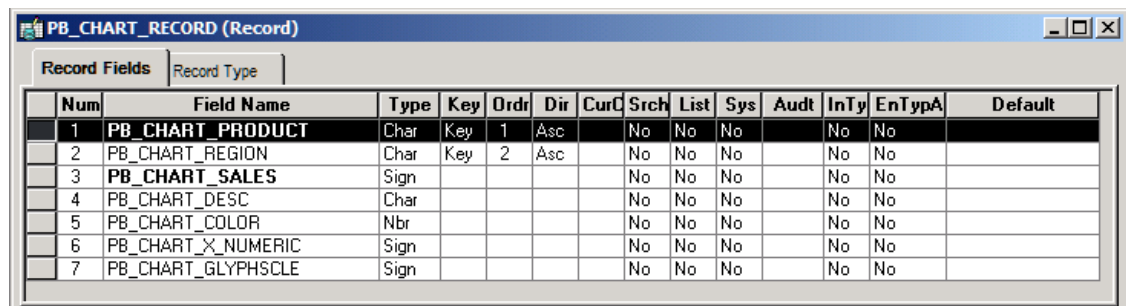


The screenshot shows a window titled "PB_CHART_RECORD (Record)" with a tab labeled "Record Fields". Inside the window is a table with the following columns: Num, Field Name, Type, Key, Ord, Dir, Cur, Srch, List, Sys, Audt, InTy, EnTypA, and Default. The table contains seven rows of field definitions.

Num	Field Name	Type	Key	Ord	Dir	Cur	Srch	List	Sys	Audt	InTy	EnTypA	Default
1	PB_CHART_PRODUCT	Char	Key	1	Asc		No	No	No		No	No	
2	PB_CHART_REGION	Char	Key	2	Asc		No	No	No		No	No	
3	PB_CHART_SALES	Sign					No	No	No		No	No	
4	PB_CHART_DESC	Char					No	No	No		No	No	
5	PB_CHART_COLOR	Nbr					No	No	No		No	No	
6	PB_CHART_X_NUMERIC	Sign					No	No	No		No	No	
7	PB_CHART_GLYPHSCL	Sign					No	No	No		No	No	

The record must be available in the component buffer at runtime. You can use a database record that is already part of your application or you can use a derived/work record or a component rowset that you populate at runtime. For greatest control, you will normally populate your record or rowset at runtime.

For the sample chart, place the record on a grid on a second page on the sample component. This placement gives you the opportunity to experiment with the data.

Your chart data record must be placed at level 1 on the same component as the chart so that the data is available in the component buffer at runtime. In your application, you can hide the grids or scroll areas that hold the records. For the sample chart, you will keep the grid visible so you can enter sample data.

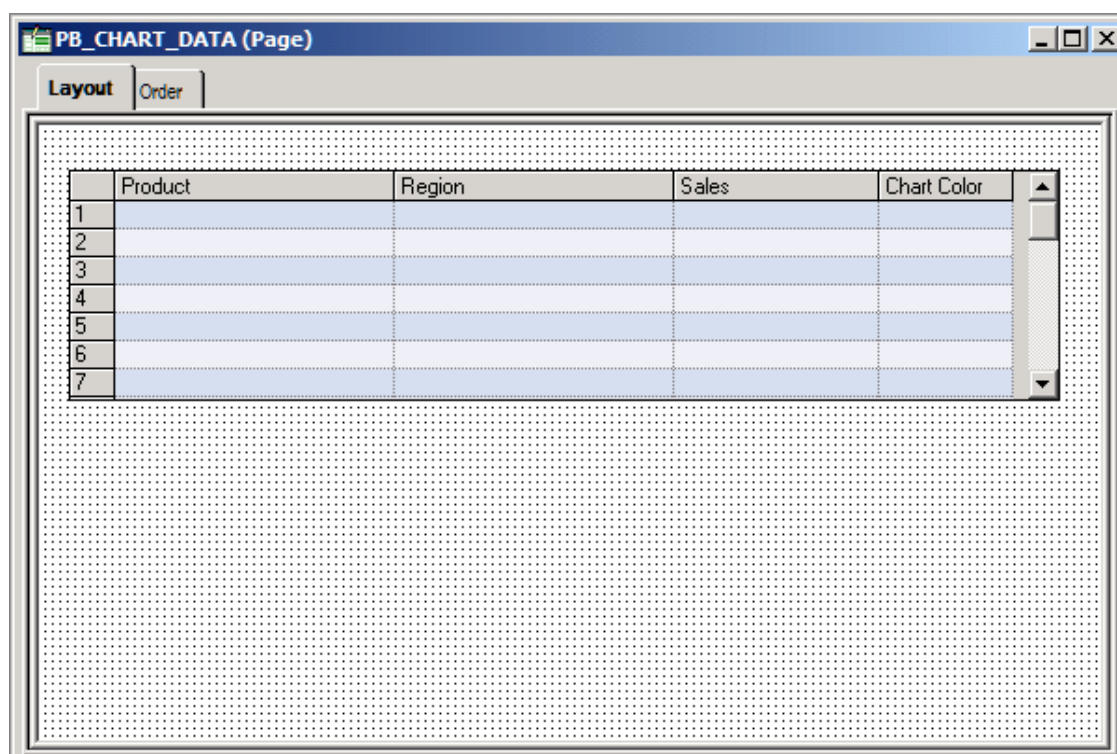

Adding PeopleCode to Instantiate a Chart Object

This example instantiates a chart object using the Chart class, so it can be used to create bar charts, line charts, pie charts, and so on. Other examples in this section demonstrate how to create charts based on the Gantt class, OrgChart class, and RatingBoxChart class.

See [Creating a Gantt Chart](#), [Creating a Rating Box Chart](#).

Add this PeopleCode to the Activate event on the page:

```
/* Declare and instantiate a chart object */
Component Chart &cChart;

&cChart = GetChart(DOC_CHRT_WRK.DOC_CHRT_FLD);
```

Chart PeopleCode is commonly placed on the Activate event, but it can be placed on any appropriate event. You could, for instance, execute the chart PeopleCode from a FieldChange event associated with a push button.

Setting the Data Source

The SetData method takes either a record or a rowset as an argument. In general, specify a record or component rowset when building a chart from page data and a standalone rowset when building a chart using an iScript.

In this example, the PeopleCode sets Product as the series data and sets Region to the x-axis, so that in a bar chart products will be grouped along the x-axis by region. In a line chart, each series is represented by a line. Sales figures are charted on the y-axis.

Note

SetData, SetDataXAxis, and SetDataYAxis are Chart class methods. The other charting classes provide equivalent methods to specify data sources.


```
/* Set the chart data record and specify x-axis, y-axis, and series data */
```

```
&cChart.SetData(Record.DOC_CHRT_SLSREC);  
&cChart.SetDataXAxis(DOC_CHRT_SLSREC.DOC_CHRT_RGN);  
&cChart.SetDataYAxis(DOC_CHRT_SLSREC.DOC_CHRT_SALES);
```

See [SetData method: Chart class](#), [SetDataSeries method: Chart class](#), [SetDataXAxis method: Chart class](#), [SetDataYAxis method: Chart class](#), [Creating a Chart Using an iScript](#).

Viewing the Page in the Browser


This is the most basic Chart class chart. It has no data and only the default y-axis.

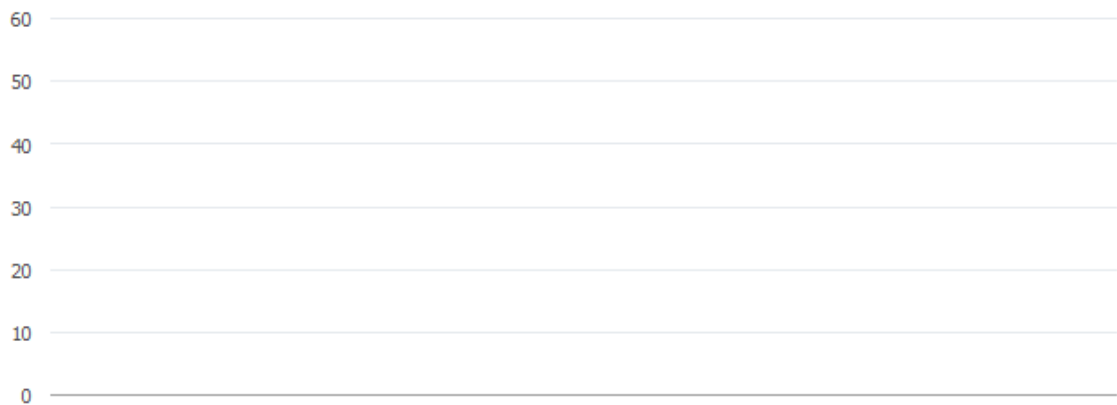**Adding Data for the Chart**

Add the following data to the chart:

Region	Sales
Arizona	60
California	55
Oregon	50
Washington	45

This bar chart is generated by the example code and data:

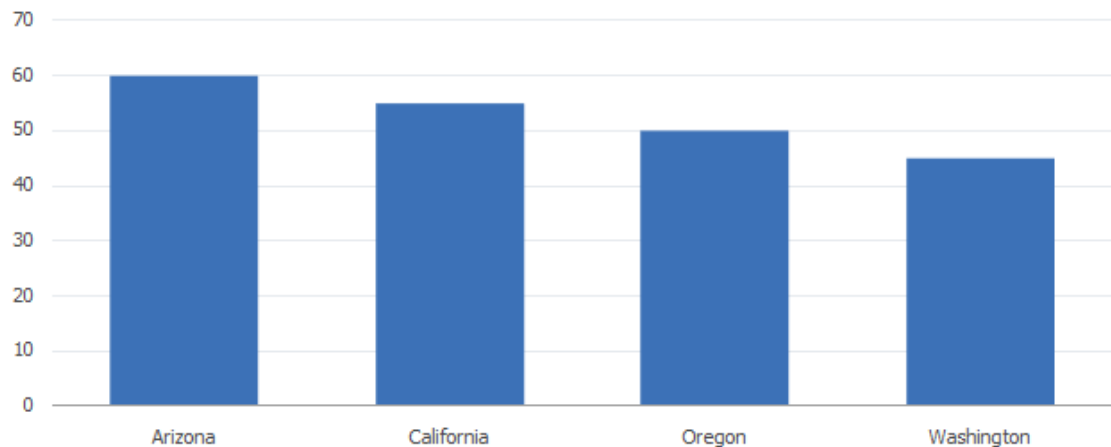

This chart graphs sales on the y-axis (the vertical axis) and regions on the x-axis (the horizontal axis).

When the data for the chart is grouped according to values, a set of data representing a single value is called a *series*. For instance, if a chart shows sales for different products in each region, then the set of data for each product is a series.

At this point, the chart has only one series, so you do not need to set the series record field.

Specify the Series Data

If you want to graph more than one product on your chart, you need to specify the source of the series data.


For example, add the products shown in this table to your data:

Product	Region	Sales
Footballs	Arizona	60
Rackets	Arizona	50
Shoes	Arizona	42
Tents	Arizona	35
Footballs	California	55
Rackets	California	46
Shoes	California	30
Tents	California	35
Footballs	Oregon	50
Rackets	Oregon	40
Shoes	Oregon	30
Tents	Oregon	25
Footballs	Washington	45
Rackets	Washington	30
Shoes	Washington	20
Tents	Washington	15

Add this PeopleCode to set the series record field:

```
&cChart.SetDataSeries(DOC_CHRT_SLSREC.DOC_CHRT_PRDCT);
```

The resulting chart is a default 2D bar chart with bars for each region grouped by series:

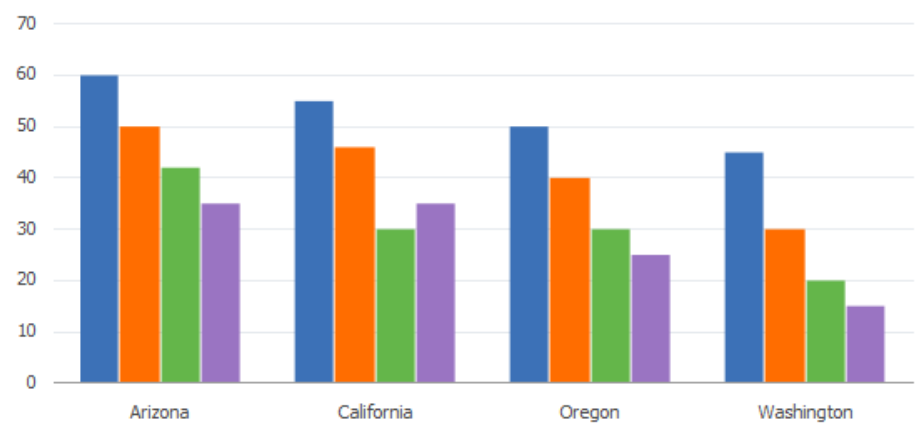

The chart has four series:

- Footballs
- Rackets
- Shoes
- Tents

Each series shows four regions along the x-axis:

- Arizona
- California
- Oregon
- Washington

Sales values appear against the y-axis as bar height.

The chart uses the default colors.

Specifying Chart Colors

If you do not want to use the default colors, you need a column containing the colors for each bar. Typically, the bars in a series are colored alike.

Product	Region	Sales	Chart Color
Footballs	Arizona	60	1
Footballs	California	55	1
Footballs	Oregon	50	1

Product	Region	Sales	Chart Color
Footballs	Washington	45	1
Rackets	Arizona	50	13
Rackets	Oregon	46	13
Rackets	Washington	40	13
Rackets	California	30	13
Shoes	Arizona	42	5
Shoes	California	30	5
Shoes	Oregon	30	5
Shoes	Washington	20	5
Tents	Arizona	35	15
Tents	California	35	15
Tents	Oregon	25	15
Tents	Washington	15	15

Add the following PeopleCode to your program to set the colors for your chart:

```
/* Associate color field with chart */  
&cChart.SetDataColor(DOC_CHRT_SLSREC.DOC_CHRT_COLOR);
```


Adding Text Elements

The following PeopleCode adds these elements to your chart:

- Title
- Legend
- Y-axis title
- X-axis title

```
/* Set title and legend properties */  
&cChart.MainTitle = "Recreational Product Sales by Region";  
&cChart.HasLegend = True;  
&cChart.LegendPosition = %ChartLegend_Right;  
  
/* Set axis text properties */  
&cChart.XAxisTitle = "Region";  
&cChart.YAxisTitle = "Sales";
```

This is the resulting chart:

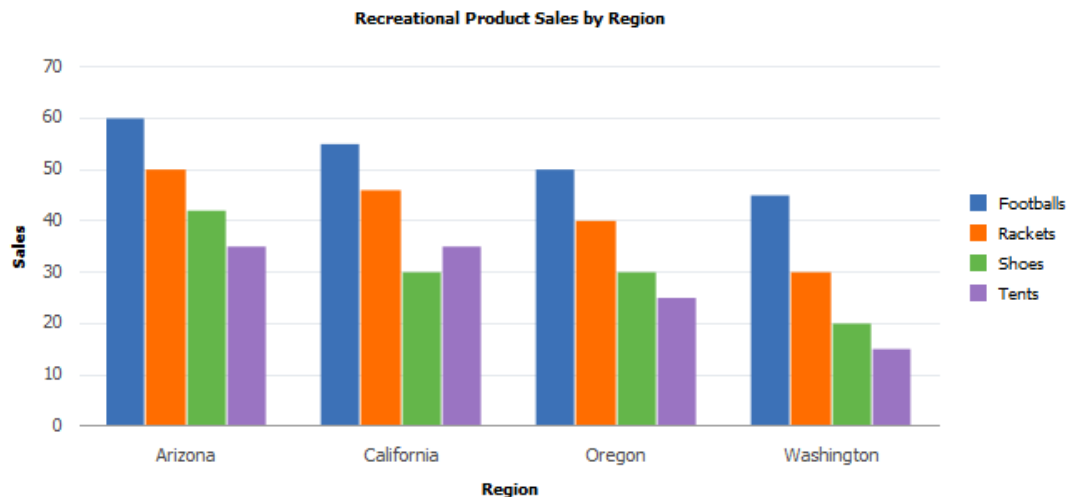

Reviewing the Complete Program

The PeopleCode for this bar chart has been presented in snippets. Here is the complete program that produced the chart:

```
/* Declare and instantiate a chart object */
Component Chart &cChart;

&cChart = GetChart(DOC_CHRT_WRK.DOC_CHRT_FLD);

/* Set the chart data record and specify x-axis, y-axis, and series
data */

&cChart.SetData(Record.DOC_CHRT_SLSREC);
&cChart.SetDataXAxis(DOC_CHRT_SLSREC.DOC_CHRT_RGN);
&cChart.SetDataYAxis(DOC_CHRT_SLSREC.DOC_CHRT_SALES);
&cChart.SetDataSeries(DOC_CHRT_SLSREC.DOC_CHRT_PRDCT);

/* Associate color field with chart */
&cChart.SetDataColor(DOC_CHRT_SLSREC.DOC_CHRT_COLOR);

/* Set title and legend properties */
&cChart.MainTitle = "Recreational Product Sales by Region";
&cChart.HasLegend = True;
&cChart.LegendPosition = %ChartLegend_Right;

/* Set axis text properties */
&cChart.XAxisTitle = "Region";
&cChart.YAxisTitle = "Sales";
```


Other Modifications

The remainder of this section shows the effects of modifying other aspects of your chart.

Changing X-Axis and Series Values


```
&cChart2.SetDataXAxis(DOC_CHRT_SLSREC.DOC_CHRT_PRDCT);  
&cChart2.SetDataSeries(DOC_CHRT_SLSREC.DOC_CHRT_RGN);  
  
&cChart2.MainTitle = "Recreational Product Sales by Product";  
&cChart2.XAxisTitle = "Product";
```

To group sales by product instead of by region, switch the series and the x-axis. You will also need to reorder colors to correspond to regions instead of products:

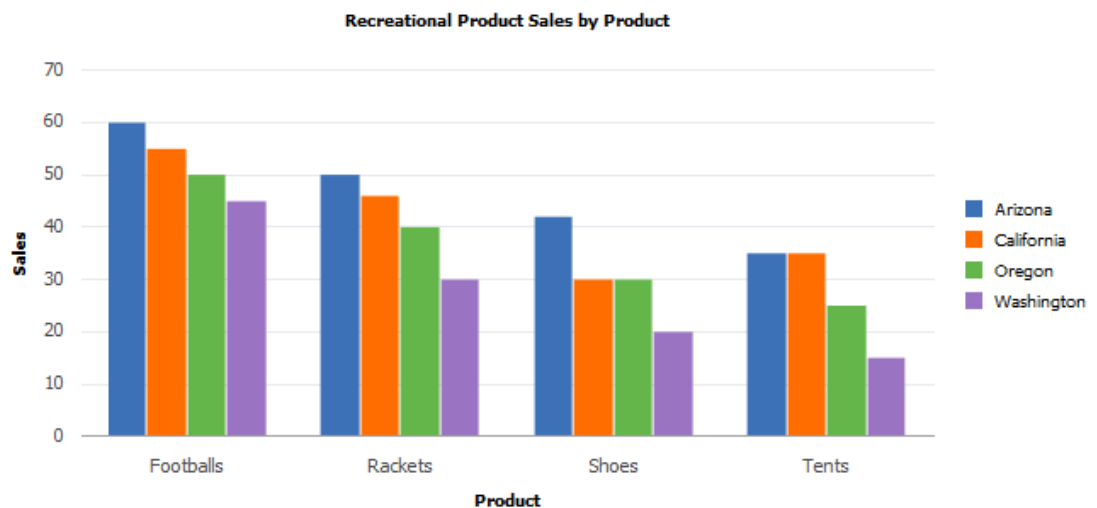

Axis Properties

If your chart has negative values, the bars automatically extend below the x-axis:

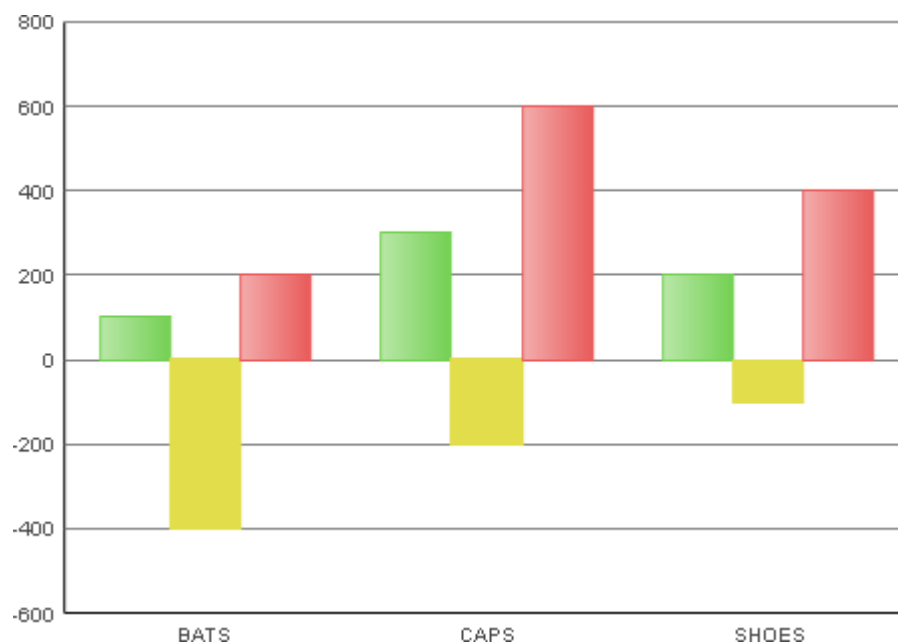

If you want to remove the tick marks from the x- or y-axis, you need to specify an empty array for the `SetXAxisLabels` or `SetYAxisLabels` methods.

The following example removes the tick marks from the y-axis:

```
Local array of string &Arr;

&Arr = CreateArray("");
&Chart.SetYAxisLabels(&Arr);
```

If you set the x-axis labels to an empty array to remove the ticks, you must be plotting a single series on the chart because labels are automatically generated for each series if you do not provide them.

See [SetXAxisLabels method: Chart class](#), [SetYAxisLabels method: Chart class](#).

You can also use the `XAxisMin`, `XAxisMax`, `YAxisMin`, `YAxisMax`, and other axis properties to control the appearance of the axes.

See [XAxisLabelOrient property: Chart class](#), [YAxisLabelOrient property: Chart class](#), [YAxisMax property: Chart class](#), [YAxisMin property: Chart class](#)


Chart Class Chart Types

Use the `Type` property to set the chart type.

2D Bar Chart

```
&cChart.Type=%ChartType_2DBar;
```

The default Chart class chart type is a 2D bar chart:

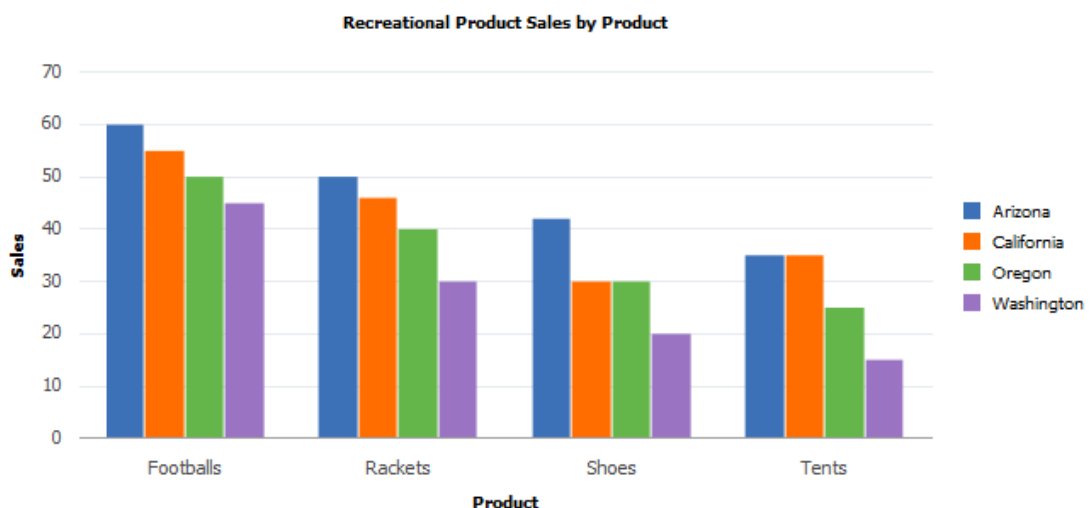

The following examples show the various chart types using the same data. Each example gives the PeopleCode snippet that creates that chart type.

For a complete list of all Chart class chart types, see Chart class `Type` property.

See [Type property: Chart class](#).

The Charting Examples section provides other examples of PeopleCode for charts using Gantt class, OrgChart class, and RatingBoxChart class at the end of the chapter.


See [Creating a Gantt Chart](#), [Creating a Rating Box Chart](#).

Horizontal Bar Chart

Use this line of code to specify a horizontal bar chart:

```
&cChart.Type = %ChartType_2DHorizBar;
```

This example illustrates a horizontal bar chart:

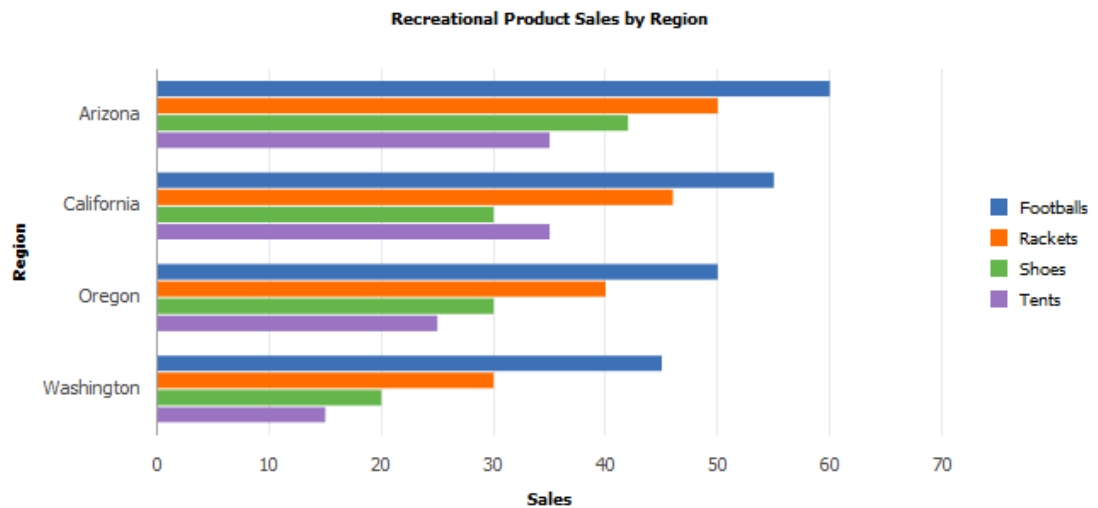


Stacked Bar Chart

With a the stacked bar chart, you can place a different emphasis on the same data. The stacked column shows total sales per region as well as the product segments that contribute to the total.

Use this line of code to specify a stacked bar chart:

```
&cChart.Type = %ChartType_2DStackedBar;
```

This example illustrates a stacked bar chart:

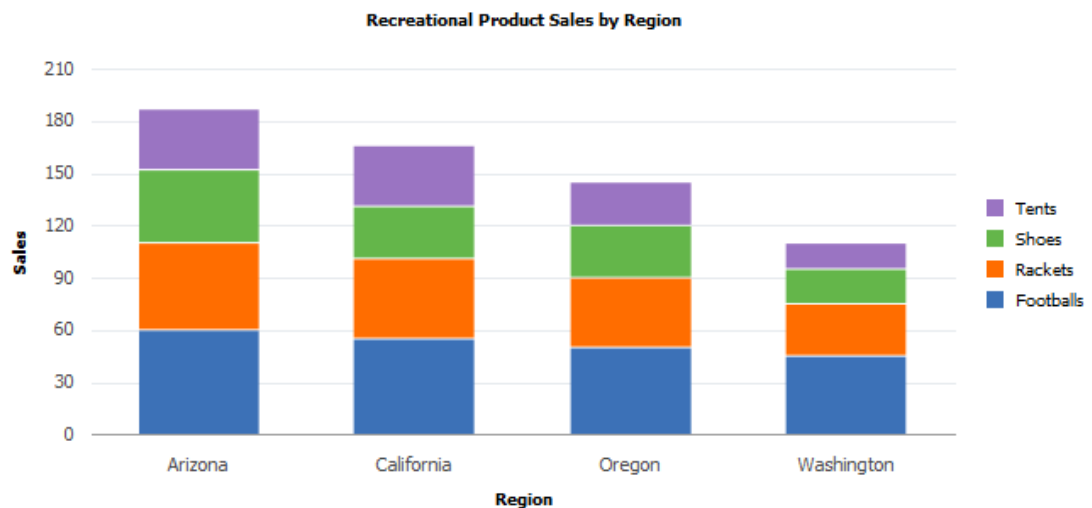


Horizontal Stacked Bar Chart

Use this line of code to specify a horizontal stacked bar chart:

```
&cChart.Type = %ChartType_2DHorizStackedBar;
```

This example illustrates a horizontal stacked bar chart:

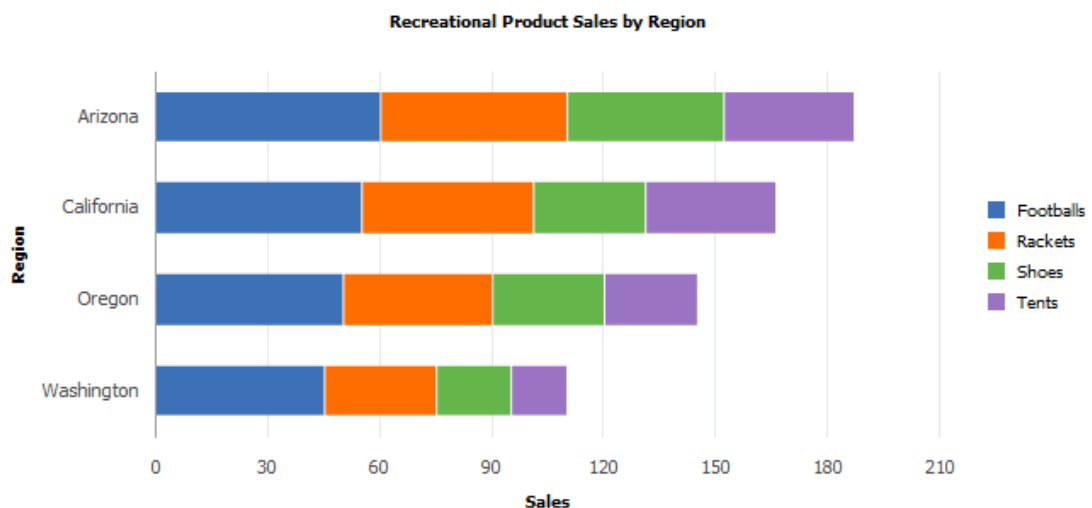

Percent Bar Chart

A percent bar is similar to a stacked bar, but the segments of each bar add up to 100. The segments show the proportional contribution of each product to total sales.


Note

Negative values cannot be displayed in any type of percent bar chart.

Use this line of code to specify a stacked percent bar chart:

```
&cChart.Type = %ChartType_2DPercentBar;
```

This example illustrates a percent bar chart:

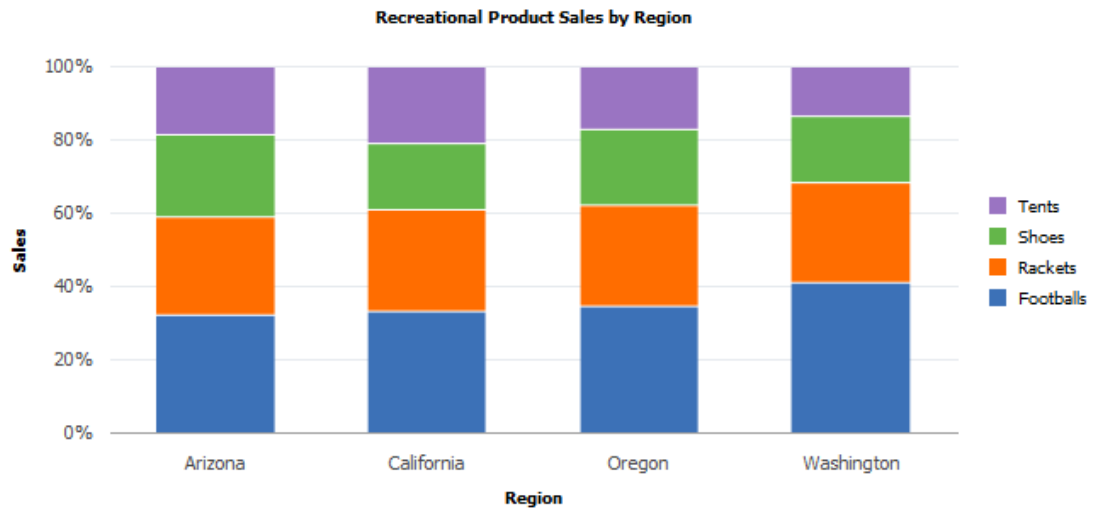

Horizontal Percent Bar Chart


Note

Negative values cannot be displayed in any type of percent bar chart.

Use this line of code to specify a horizontal percent bar chart:

```
&cChart.Type = %ChartType_2DHorizPercentBar;
```

This example illustrates the fields and controls on a horizontal percent bar chart:

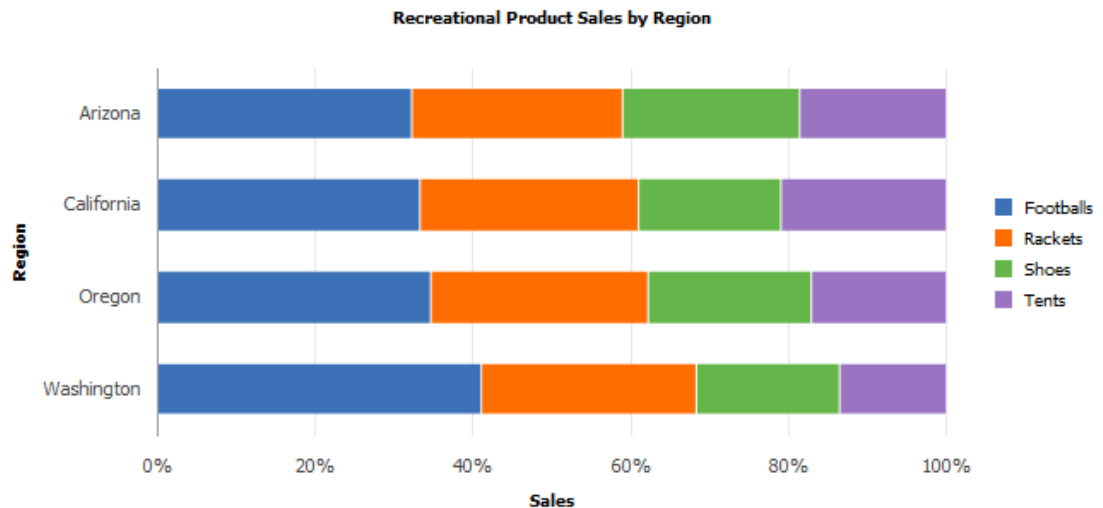


Line Chart

A line chart is useful for showing changes and trends over time or across categories.

Use this line of code to specify a line chart:

```
&cChart.Type = %ChartType_2DLine;
```

This example illustrates a line chart:

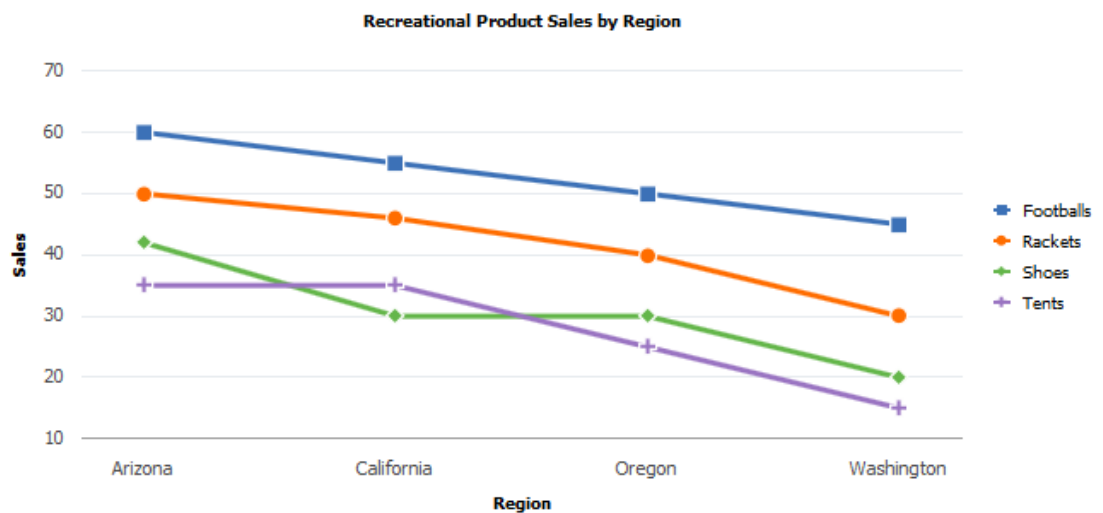

Overlay Chart


You can overlay one chart on top of another to compare two different but related sets of data. The following chart uses a second set of data, showing average temperature for each region.

Use the `OLType` property to specify whether the overlay is a line chart or a histogram.

Add this PeopleCode to the PeopleCode for your bar chart to create 2D line chart overlay:

```
/* Create Overlay */
&cChart3.SetOldData(Record.DOC_CHRT_OLREC);
rem &cChart.SetOldDataSeries(DOC_CHRT_OLREC.SC_CHART_SERIES);
&cChart3.SetOldDataXAxis(DOC_CHRT_OLREC.DOC_CHRT_RGN);
&cChart3.SetOldDataYAxis(DOC_CHRT_OLREC.DOC_CHRT_SALES);
&cChart3.OLType = %ChartType_2DLine;
```

This example illustrates a 2D line chart overlay on a vertical bar chart:

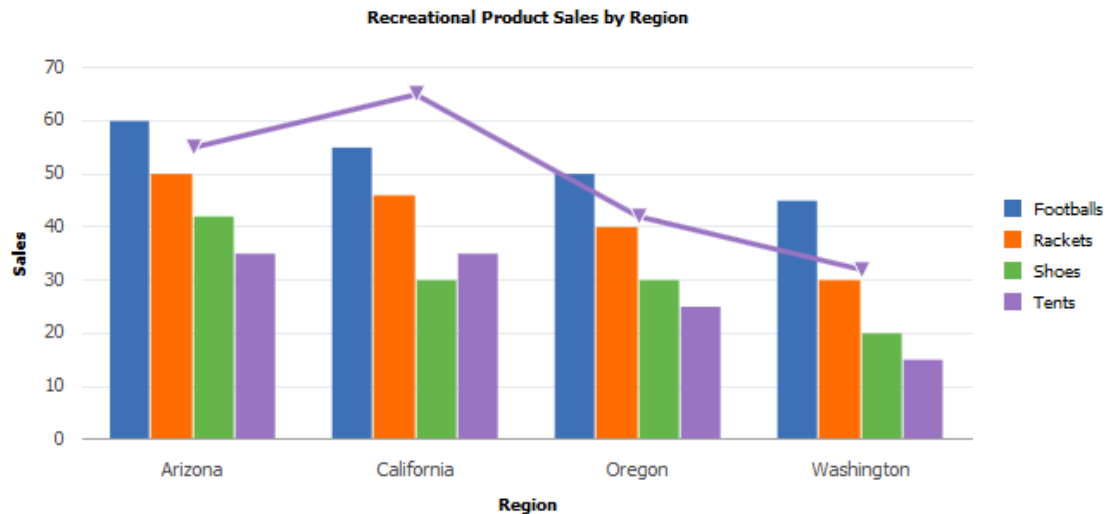

Scatter Chart

Use this line of code to specify a scatter chart:

```
&cChart.Type = %ChartType_2DScatter;
```

A scatter chart compares number pairs. Each pair is plotted against the horizontal x-axis and the vertical y-axis. The data values are scattered across the chart. XY scatter charts are good for showing comparisons of numbers, such as scientific or statistical data, where several measurements need to be plotted on a single chart.

A scatter chart is a true XY chart, meaning that the x-axis is numeric. The `IsTrueXY` property is automatically set to `True`.

For example, this sample data could be used to make an XY scatter chart:


Tenure	Salary
11	88000
12.2	96200
4.6	101300
6.6	83000
14	111200

Tenure	Salary
8.5	118000

You use this code snippet to make a scatter chart:

```
&cChart5.Type = %ChartType_2DScatter;
&cChart5.SetData(Record.DOC_CHRT_XYDATA);
&cChart5.SetDataXAxis(DOC_CHRT_XYDATA.DOC_CHRT_X);
&cChart5.SetDataYAxis(DOC_CHRT_XYDATA.DOC_CHRT_Y);
```

This example illustrates the scatter chart for the preceding data:

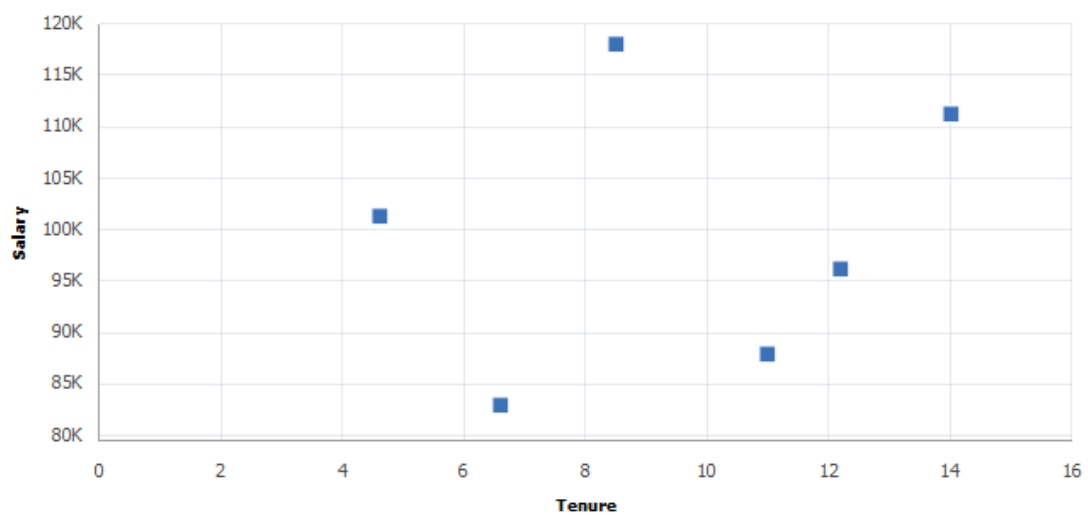

Note

If you have only one point of data, that is, only one x and y pair, use a scatter chart. You may have unexpected results if you use a line chart with only one point.

Bubble Chart

A bubble chart is a special type of scatter chart.

If you add a third data set, the z-axis, to a scatter chart, you can create a bubble chart, which uses the size of the markers to represent a third dimension of numeric data.

You can also set annotations for scatter charts and bubble charts.

This chart example uses Age to determine the size of the bubble markers on the chart and Name to set the annotations:

Tenure	Salary	Age	Name
11	88000	39	Joyce


Tenure	Salary	Age	Name
12.2	96200	55	Tolstoy
4.6	101300	32	Shelley
6.6	83000	48	Tolkien
14	111200	59	Dickens
8.5	118000	49	Hemingway

```

&cChart6.Type = %ChartType_2DBubble;
&cChart6.SetData(Record.DOC_CHRT_XYDATA);
&cChart6.SetDataXAxis(DOC_CHRT_XYDATA.DOC_CHRT_X);
&cChart6.SetDataYAxis(DOC_CHRT_XYDATA.DOC_CHRT_Y);
&cChart6.SetDataZAxis(DOC_CHRT_XYDATA.DOC_CHRT_AGE);
&cChart6.SetDataAnnotations(DOC_CHRT_XYDATA.DOC_CHRT_LASTNAME);

```

This example illustrates the bubble chart for the preceding data:

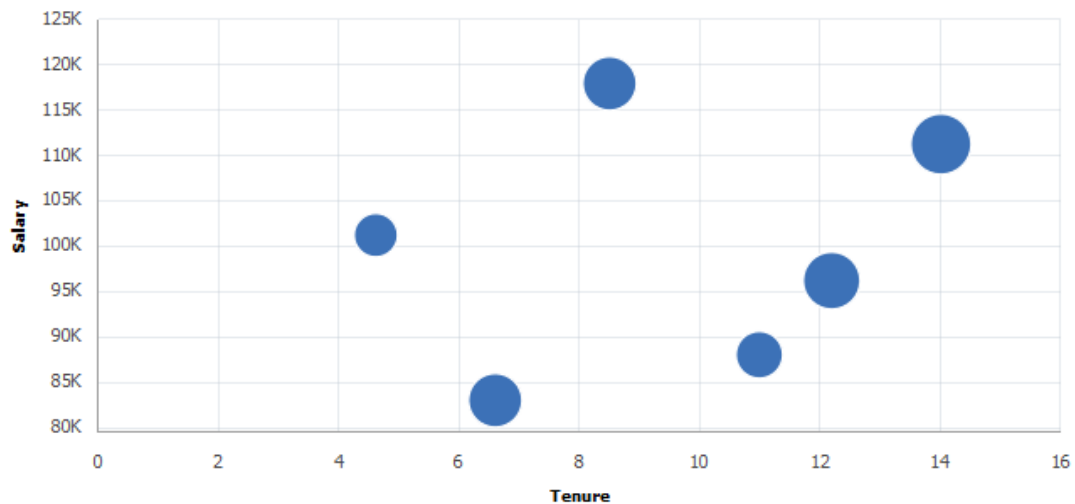

Pie Chart

A pie chart shows comparisons within a single set of values, and it shows how parts contribute to a whole. It is an ideal chart type to display the contribution of each region to an annual sales total.

A pie chart ignores the series and only plots x-axis data against y-axis values. Our original bar chart has four regions times four products, resulting in 16 XY pairs. A pie chart with all of those slices would be confusing and not helpful. Instead, suppose you want to show just the data for tents, which are in rows 13–16. You can use a combination of the `DataWidth` and `DataStartRow` properties to select which rows to display.


You can make a pie chart showing only rows 13–16 by adding this snippet of code:

```

&cChart.DataWidth = 4;
&cChart.DataStartRow = 13;
&cChart.Type = %ChartType_2DPie;

```


This example illustrates a 2D pie chart generated from a portion of the rowset:

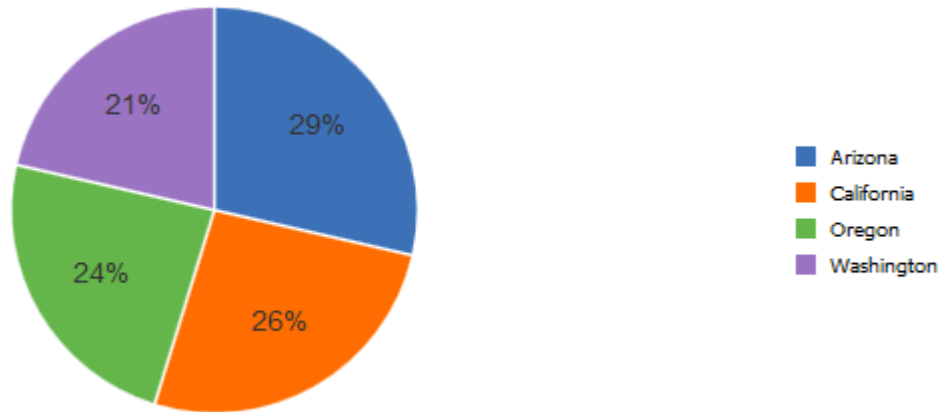


Exploded Pie Chart

Use the `SetExplodedSectorsArray` Chart class method to specify the sectors to explode. Sectors correspond to rows of data used by the pie chart. Sector 1 is the first row of data, or the row specified with the `DataStartRow` chart class property, if it is used, and so on.

The following snippet of code explodes sectors 1 and 3:

```
Local array of number &ExplodedArray;  
&ExplodedArray = CreateArray(1,3);  
&cChart.SetExplodedSectorsArray(&ExplodedArray);
```

This example illustrates an exploded pie chart:

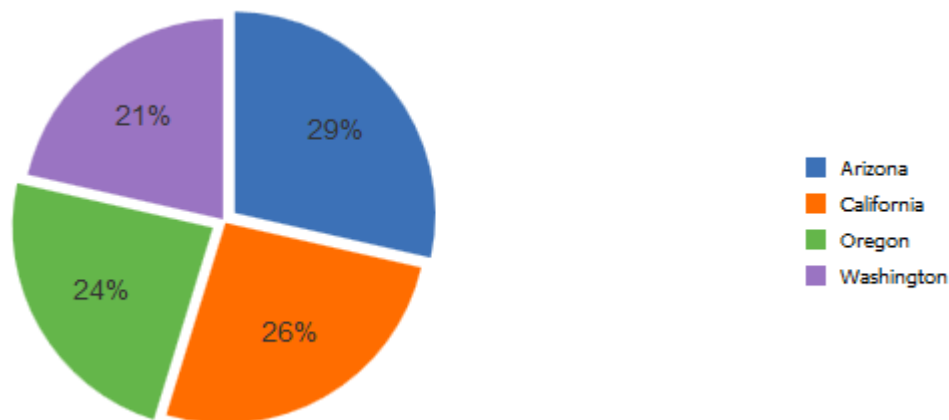


See the [SetExplodedSectorsArray method: Chart class](#) property.

3D Pie Chart

Use this line of code to specify a 3D pie chart:

```
&cChart.Type = %ChartType_3DPie;
```

This example illustrates a 3D pie chart.

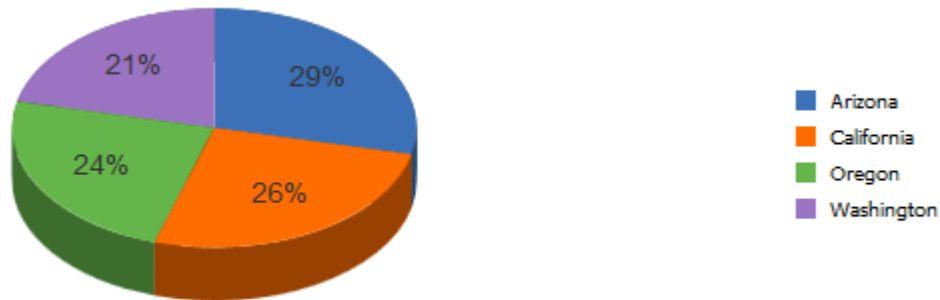

Adding Drilldown

If you set the property `IsDrillable` to `True` and add `FieldChange` PeopleCode to your chart, your user can get more information by clicking a chart data element—a bar, line segment, data point, or pie slice.


For a simple example, add this PeopleCode to the `FieldChange` event on the y-axis field:

```
MessageBox(0, "", 0, 0, "Sales for " | DOC_CHRT_SLSREC.DOC_CHRT_PRDCT | " in  
" | DOC_CHRT_SLSREC.DOC_CHRT_RGN | " = " | DOC_CHRT_SLSREC.DOC_CHRT_SALES |  
"" );
```

And add this code to the page `Activate` event for your pie chart:

```
&cChart.IsDrillable = True;
```

When the user clicks the Arizona slice of the pie chart, this message appears:

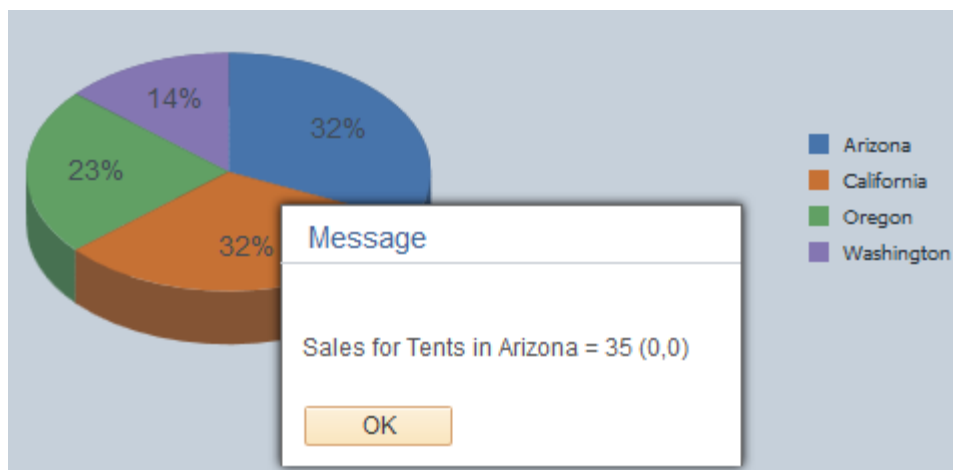

Current context provides the values for fields in the current row in the component buffer. You can use drilldown with your chart data fields along with any other data in the component buffer to accomplish anything `FieldChange` PeopleCode is capable of.

If the bars on a bar chart are too narrow, a user may not be able to click them. Sometimes, a few bars on a chart are affected, sometimes all of the bars cannot be clicked. The workaround is to put fewer bars on your chart or to make your chart bigger so that each bar is wider.

See [IsDrillable property: Chart class](#).

Using the Other Charting Classes


In addition to the all the charts you can create with the Chart class, you can create specialized charts using the Gantt class, the OrgChart class, and the RatingBoxChart class.

You follow the same initial steps to create these specialized charts as you do for the Chart class chart types. The PeopleCode programs to set the data and properties are similar as well, but Gantt charts, organization charts, and rating box charts use data differently and interact with the user in different ways than do the Chart class charts.

See [Creating a Gantt Chart](#), [Creating a Rating Box Chart](#).

Creating a Gantt Chart

The PeopleCode and data used in this example create the following Gantt chart:

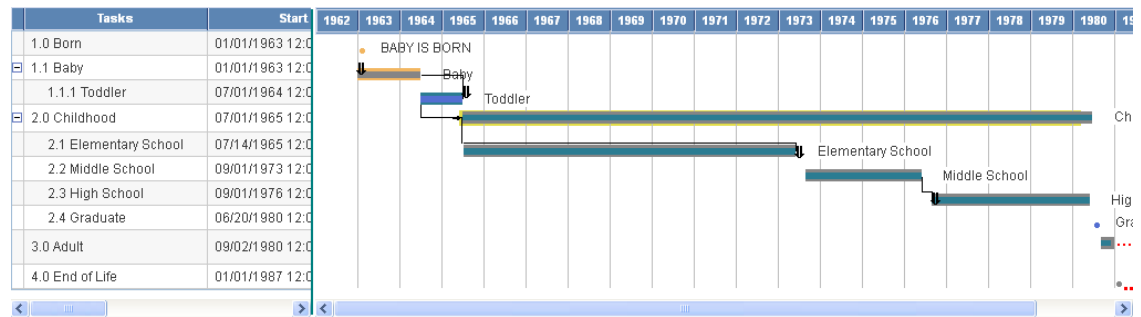

This example uses the following data in the record QE_GANTT_TASK:

This example illustrates Gantt task data:

Tasks				
'Task ID	'Level	TASK NAME	'PLANNED START DATE	'PLANNED END DATE
1	1	Birth	01/01/1963 12:00:00AM	01/01/1963 12:00:00AM
2	1	Baby	01/01/1963 12:00:00AM	06/30/1964 12:00:00AM
3	2	Toddler	07/01/1964 12:00:00AM	07/01/1966 12:00:00AM
4	1	Childhood	07/01/1966 12:00:00AM	09/01/1980 12:00:00AM
5	2	Elementary School	09/01/1968 12:00:00AM	06/01/1973 12:00:00AM
6	2	Middle School	09/01/1973 12:00:00AM	06/01/1976 12:00:00AM
7	2	High School	09/01/1976 12:00:00AM	06/01/1980 12:00:00AM
8	2	Graduate	06/20/1980 12:00:00AM	06/20/1980 12:00:00AM
9	1	Adult	09/02/1980 12:00:00AM	12/31/1983 12:00:00AM
10	1	End of Life	01/01/1987 12:00:00AM	01/01/1987 12:00:00AM

The chart also uses the following dependency data in the record QE_GANTT_TASKD:

This example illustrates Gantt dependency data:

Dependencies			
Task ID	Parent Task ID	Dependency Type	URL
2	1		
5	3		http://www.google.com
6	5		
7	6		
8	7		
9	8		

To create a Gantt chart:

1. In Application Designer, add a chart control to a page and associate the chart control with a record name and a field name.

See [Creating a Chart Using the Chart Class](#).

2. Initialize a Gantt chart object.

Initialize the chart using the `GetGanttChart` function. The arguments of the function are the record and field name specified for the chart definition in Application Designer.

```
Local Gantt &gGantt;  
&gGantt = GetGanttChart(QE_CHART_DUMREC.QE_CHART_FIELD);
```

3. Specify values for the required methods.

At a minimum, specify the source of the task data and which fields contain task ID, start date, and end date.

```
&gGantt.SetTaskData(Record.QE_GANTT_TASK);  
&gGantt.SetTaskID(QE_GANTT_TASK.QE_TASK_ID);  
&gGantt.SetPlannedStartDate(QE_GANTT_TASK.QE_PLANNED_START);  
&gGantt.SetPlannedEndDate(QE_GANTT_TASK.QE_PLANNED_END);
```

4. Specify values for the additional methods controlling the appearance of the data.

After setting the required methods, you can set additional methods to control the appearance of the chart. The following code specifies the percentage of the entire chart that is taken up by the chart area, the width and height of the chart, if the user can click the chart area of the Gantt chart and either execute a function or a URL, and whether labels should appear with the tasks in the task section.

```
&gGantt.SetChartArea(50);  
&gGantt.Width = 700;  
&gGantt.Height = 380;  
&gGantt.IsDrillable = True;  
&gGantt.ShowTaskLabels = True;
```

5. Specify the appearance of grid lines.

Depending on the type of data that you are using, you can specify the type of grid lines that should appear in the chart section of the Gantt chart.

```
&gGantt.GridLineType = %ChartLine_Solid;
&gGantt.GridLines = %ChartGrid_Vertical;
```

6. Specify the appearance of data.

The following methods control the appearance of the different parts of the task data, such as the label, which hints appear when you pass the mouse over the task data, and so on.

```
&gGantt.SetTaskName(QE_GANTT_TASK.QE_TASK_NAME);
&gGantt.SetWBSNumbering(QE_GANTT_TASK.QE_HINTS);
&gGantt.SetTaskLevel(QE_GANTT_TASK.QE_LEVEL);
&gGantt.SetTaskLabel(QE_GANTT_TASK.QE_TASK_LABEL);
&gGantt.SetTaskProgress(QE_GANTT_TASK.QE_TASK_PROGRESS);
&gGantt.SetTaskBarURL(QE_GANTT_TASK.QE_URL);
&gGantt.SetTaskMilestone(QE_GANTT_TASK.QE_TASK_MILESTONE);
&gGantt.TaskMilestoneGlyph = QE_GANTT_PROJ.QE_MILESTONE_GLYPH;

&gGantt.SetPlannedTaskBarColor(QE_GANTT_TASK.QE_PLANNED_COLOR);
&gGantt.SetActualTaskBarColor(QE_GANTT_TASK.QE_ACTUAL_COLOR);
&gGantt.SetTaskProgressBarColor(QE_GANTT_TASK.QE_PROGRESS_COLOR);
```

7. Specify the additional fields that will appear in the table section.

You can also specify application data that will appear with the task data.

```
&gGantt.SetTaskAppData(QE_GANTT_TASK.QE_PLANNED_START,
    QE_GANTT_TASK.QE_PLANNED_END, QE_GANTT_TASK.QE_TASK_PROGRESS,
    QE_GANTT_TASK.QE_TASK_NAME);
```

8. Specify titles for the task bars.

```
&gGantt.TaskTitle = "Tasks";
&appDataArray = CreateArray("Start", "End", "Progress", "Name");
&gGantt.SetTaskAppDataTitles(&appDataArray);
```

9. Specify the fields for task dependency data.

You do not need to specify dependency data. However, if you do, you must also specify the parent ID and the child ID (where the dependency data starts and ends). You can also specify the type of line used between dependencies and a URL that the browser will open to if the user clicks a dependency line.

```
&gGantt.SetTaskDependencyData(Record.QE_GANTT_TASKD);
&gGantt.SetTaskDependencyParentID(QE_GANTT_TASKD.QE_PARENT_TASK_ID);
&gGantt.SetTaskDependencyChildID(QE_GANTT_TASKD.QE_TASK_ID);
&gGantt.TaskDependencyLineType = %ChartLine_Solid;
&gGantt.SetTaskDependencyURL(QE_GANTT_TASKD.URL);
```

10. Specify the actual dates for the project.

If you know the actual start and end dates, in addition to the planned date, you can add those to your chart.

```
&gGantt.SetActualStartDate(QE_GANTT_TASK.QE_ACTUAL_START);
&gGantt.SetActualEndDate(QE_GANTT_TASK.QE_ACTUAL_END);
```

11. Specify the time line axis values.

You can specify values for where the time line axis starts and ends.

```
&gGantt.AxisStartDateTime = DateTimeValue("01/01/1963 8:00:00");
&gGantt.AxisEndDateTime = DateTimeValue("01/01/1987 8:00:00");
```

12. Specify the format of the time line axis values.

You can specify the format of the time line elements, such as the appearance of the days of the week, whether as a number or using the full name, and so on.

```
&gGantt.SetMonthFormat(%Chart_MonthFormat_FullName);
&gGantt.SetDayFormat(%Chart_DayFormat_2Digit);
```

Creating an Organization Chart

The PeopleCode used in this example creates the following organization chart:



To create an organization chart:

1. Add a chart control to a page in Application Designer.

Associate the chart control with a record name and field name.

See [Creating a Chart Using the Chart Class](#).

2. Add the organization node record and the pop-up node record to the component.

These records are derived/work records that contain clones of the subrecords PTORGNODE_SBR and PTPOPUPNODE_SBR. These records must be in the component buffer. You can add them to a hidden grid on the page, or you can place them on another page in the same component.

3. If the chart will have breadcrumbs, add the breadcrumb node record to the component.

This derived/work record contains a clone of the subrecord PTORGCRMB_SBR. The record must be in the component buffer.

4. Prepare the organization chart data.

In an event such as PreBuild, instantiate two rowset objects and populate them with the organization node data and the pop-up node data.

This example shows one possible way. How you do it depends on how your data is stored and how you intend to present it.

```
Component Rowset &rs, &rsP, &rsBC, &rsOrgNode, &rsOrgPopupND,
&rsBreadCrumbs;
Component OrgChart &ocOrgChart;
```

```
Local Rowset &RSGridDR;
Local Rowset &RSAGRID;
```

```
/* The record QE_ORG_NODEDATA has the data for the org chart **
** You will probably fill the rowset with some subset of the data**
** in the database. This example uses all the rows. */
&rs = CreateRowset(Record.QE_ORG_NODEDATA);
&rs.Fill();
```

```
/* Get the grid on the page for the node data and initialize to nulls */
& rsOrgNode = GetLevel0()(1).GetRowset(Scroll.QE_ORG_NODE);
& rsOrgNode.Flush();
```

```
/* Copy data from database table, QE_ORG_NODEDATA to the derived/work
** record QE_ORG_NODE_DR */
&rs.CopyTo(&rsOrgNode, Record.QE_ORG_NODEDATA, Record.QE_ORG_NODE_DR);
```

```
/* The record QE_ORG_POPDATA has the data for the popup chart */
&rsP = CreateRowset(Record.QE_ORG_POPDATA);
&rsP.Fill();
```

```
/* Get the grid on the page for the popup data and initialize to nulls */
& rsOrgPopupND = GetLevel0()(1).GetRowset(Scroll.QE_ORG_POPUP);
& rsOrgPopupND.Flush();
```

```
/* Copy data from database table, QE_ORG_POPDATA to the derived/work
** record QE_ORG_POP_DR */
&rsP.CopyTo(&rsOrgPopupND, Record.QE_ORG_POPDATA, Record.QE_ORG_POP_DR);
```

```
/* Fill in the breadcrumb information for this chart if the chart **
```

```

** uses breadcrumbs. */
&rsBC = CreateRowset(Record.QE_ORG_CRMB);
&rsBC.Fill();

/* Get the grid on the page for the pop data and initialize to nulls */
&rsBreadCrumbs = GetLevel0()(1).GetRowset(Scroll.QE_ORG_BCRMB);
&rsBreadCrumbs.Flush();

/* Copy data from database table, QE_ORG_CRMB to the derived/work
** record QE_ORG_CRMB_DR */
&rsBC.CopyTo(&rsBreadCrumbs, Record.QE_ORG_CRMB, Record.QE_ORG_CRMB_DR);

```

5. Instantiate an OrgChart object.

In an event such as Activate, add PeopleCode to instantiate and define your organization chart.

Get the chart using the GetOrgChart function. The argument for this function is the record name and field name specified on the Records tab of the Chart Properties dialog box in Application Designer.

```

Component Rowset & rsOrgNode, & rsOrgPopupND, &rsBreadCrumbs;
Component OrgChart &ocOrgChart;
&ocOrgChart= GetOrgChart(QE_CHART_DUMREC.QE_CHART_FIELD);

```

6. Specify the organization node record and the pop-up node record.

These records contain the clones of the subrecords PTORGNODE_SBR and PTORGPOPUP_SBR, respectively.

```

&ocOrgChart.SetNodeRecord(Record.QE_ORG_NODE_DR);
&ocOrgChart.SetPopUpNodeRecord(Record.QE_ORG_POP_DR);

```

7. Specify the node data and pop-up node data rowset objects.

/*&RSORGND and &RSORGPOPUPND are level 1 component rowsets that contain the
** organization node data and pop-up node data respectively.*/

```

&ocOrgChart.SetNodeData(&rsOrgNode);
&ocOrgChart.SetPopUpNodeData(&RSORGPOPUPND);

```

8. (Optional) Specify values for the chart display properties.

```

&ocOrgChart.MainTitle = "Application Development";
&ocOrgChart.MainTitleStyle = "PT_ORGCHART_TITLE";
&ocOrgChart.Direction = 2;
&ocOrgChart.Height = 380;
&ocOrgChart.Width = 700;
&ocOrgChart.VerticalSpace = 15;
&ocOrgChart.ImageLocation = 1;
&ocOrgChart.Style= "PTORGCHART";
&ocOrgChart.HasLegend = True;
&ocOrgChart.NodeMaxDisplayDescLength =30;
&ocOrgChart.CollapsedImage ="PT_COLLAPSED_NODE";
&ocOrgChart.ExpandedImage ="PT_EXPANDED_NODE";
&Expanded_Msg=MsgGetText(110, 100);
&Collapsed_Msg=MsgGetText(110, 101);

```



```
&ocOrgChart.Expanded_Msg =&Expanded_Msg
&ocOrgChart.Collapsed_Msg =&Collapsed_Msg
```

9. Specify values for the legend. This is required only if the chart has a legend.

```
&ocOrgChart.LegendStyle = PT_ORGCHART_LEGEND;
&LegendArray = CreateArray("Main", "1-2yrs", "3-5yrs", "Emergency",
"Retirement", "Key", "Successors");
&LegendImgArray = CreateArray("QE_NOWORGCHART", "QE_12ORGCHART",
"QE_34ORGCHART", "QE_EMRORGCHART", "QE_RETIRORG", "QE_KPERSON",
"QE_SUCCSORGCHART");

&ocOrgChart.SetLegend(&LegendArray);
&ocOrgChart.SetLegendImg(&LegendImgArray);
&ocOrgChart.LegendPosition = %ChartLegend_Top;
&ocOrgChart.LegendStyle = "PT_ORGCHART_LEGEND";
```

10. (Optional) Specify image values.

```
&ocOrgChart.ImageLocation =1;
&ocOrgChart.ImageHeight =150;
&ocOrgChart.ImageMouseoverMagnificationFactor =150;
&ocOrgChart.DefaultImage=PT_CHART_DEFAULTIMG;
```

11. Specify the breadcrumb data and the rowset and display properties. These are required only if your chart uses breadcrumbs.

```
&ocOrgChart.SetCrumbRecord(Record.QE_ORG_CRMB_DR);
&ocOrgChart.SetCrumbData(&rsBreadCrumbs);
&ocOrgChart.CrumbMaxDisplayLength = 24;
&ocOrgChart.CrumbSeparatorImage = "PT_ORG_BRCRM_SEP";
&ocOrgChart.CrumbDescrStyle = "PT_ORGCHART_BRDCRM";
```

12. (Optional) Specify the maximum number of nodes that will appear in the pop-up without a vertical scroll bar.

```
&ocOrgChart.MaxPopUpDisplayNode = 2;
```

13. (Optional) Assign style class names to control the styles of each node descriptor.

If you do not specify a style class name, then the PeopleTools default style class is used.

This example uses the default style class names, so this segment of code could be omitted. It is shown for demonstration purposes only.

```
&ocOrgChart.NodeDescr1Style = "PT_ORGNODE_DESC1";
&ocOrgChart.NodeDescr2Style = "PT_ORGNODE_DESC2";
&ocOrgChart.NodeDescr3Style = "PT_ORGNODE_DESC3";
&ocOrgChart.NodeDescr4Style = "PT_ORGNODE_DESC4";
&ocOrgChart.NodeDescr5Style = "PT_ORGNODE_DESC5";
&ocOrgChart.NodeDescr6Style = "PT_ORGNODE_DESC6";
&ocOrgChart.NodeDescr7Style = "PT_ORGNODE_DESC7";
```

14. (Optional) Assign style class names to control the styles of each pop-up node descriptor.


If you do not specify a style class name, then the PeopleTools default style sheet is used.

This example uses the default style class names, so this segment of code could be omitted. It is shown for demonstration purposes only.

```
&ocOrgChart.PopupNodeDescr1Style = "PT_POPNODE_DESC1";
&ocOrgChart.PopupNodeDescr2Style = "PT_POPNODE_DESC2";
&ocOrgChart.PopupNodeDescr3Style = "PT_POPNODE_DESC3";
&ocOrgChart.PopupNodeDescr4Style = "PT_POPNODE_DESC4";
&ocOrgChart.PopupNodeDescr5Style = "PT_POPNODE_DESC5";
&ocOrgChart.PopupNodeDescr6Style = "PT_POPNODE_DESC6";
&ocOrgChart.PopupNodeDescr7Style = "PT_POPNODE_DESC7";
&ocOrgChart.PopupNodeDescr8Style = "PT_POPNODE_DESC8";
&ocOrgChart.PopupHeaderStyle = "PT_POPNODE_HEADER";
```

Creating a Rating Box Chart

The PeopleCode used in the following example creates this rating box chart:

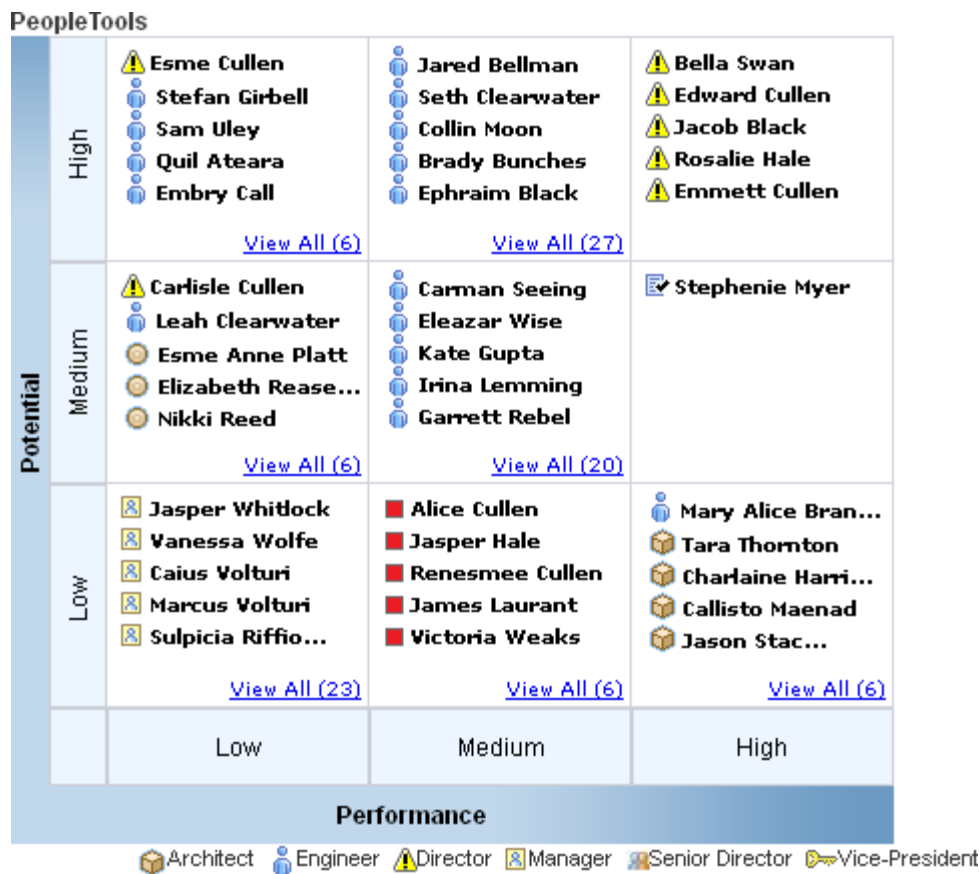

Follow these steps to create a rating box chart.

1. Create the rating box chart node record.
 - a. Clone the PTRATINGBOX_SBR subrecord to create an application-specific subrecord.
 - b. Create a new application-specific record and insert the new subrecord.
2. Add a chart control to a page in Application Designer.

See [Creating a Chart Using the Chart Class](#).

3. Add the rating box chart node record to the component.

This record must be in the component buffer. If you do not want to give the user access to the data you can add the record to a hidden grid on the page. Alternatively, you can place it on another page in the same component.

4. Add PeopleCode.

- In an event such as PreBuild, add PeopleCode to create a component buffer rowset that references the rating box chart node record.
- Add PeopleCode, probably in the page Activate event, to populate the rowset and define the chart.
- Add FieldChange PeopleCode that will execute when drag-and-drop events occur.

PeopleCode for the Rating Box Chart Example

Complete these steps to create a rating box chart:

1. Prepare the data for the chart.

Typically, write PeopleCode in an event such as PreBuild to populate a rowset with the data you want to display in the rating box chart.

```
Component Rowset &rs, &rsRatingBox;
Component RatingBoxChart &rbRatingBoxChart;

/* the record QE_RATEBOX_DATA has the data for the RATING BOX chart */
&rs = CreateRowset(Record.QE_RATEBOX_DATA);
&rs.Fill("Where QE_RATEBOX_TC=:1", QE_RATEBOX_TC.QE_RATEBOX_TC.Value);

/* Get the grid on the page for the node data and initialize to nulls */
&rsGrid = GetLevel0()(1).GetRowset(Scroll.QE_RATEBOX_TC);
&rsGrid.Flush();

/* Copy data from database table, QE_RATEBOX_DATA, to the
level 1 component rowset associated with the component derived working
record QE_RATEBOX_DR */

&rs.CopyTo(&rsGrid, Record.QE_RATEBOX_DATA, Record.QE_RATEBOX_DR);
```

2. Define the RatingBoxChart.

Add PeopleCode in an event such as Activate.

Instantiate a RatingBoxChart object using the GetRatingBoxChart built-in function to reference the page control field of the chart.

```
Component Rowset &rs, &rsGrid;
Component RatingBoxChart &rbRatingBoxChart;

&rbRatingBoxChart = GetRatingBoxChart(QE_CHART_DUMREC.QE_CHART_FIELD);
```

3. Set the required display properties for the chart.

```
&rbRatingBoxChart.XaxisBoxNum = 3;
&rbRatingBoxChart.YaxisBoxNum = 3;
&rbRatingBoxChart.PopUpWidth = 200;
&rbRatingBoxChart.PopUpHeight = 200;
```

```
&XAxisArray = CreateArray("Low", "Medium", "High");
&YAxisArray = CreateArray("Low", "Medium", "High");

&rbRatingBoxChart.SetXAxisLabels(&XAxisArray);
&rbRatingBoxChart.SetYAxisLabels(&YAxisArray);
```

4. (Optional) Specify other values for the chart display properties.

If you do not specify these properties, the following default value will be used:

```
&rbRatingBoxChart.IsDragable = True;
&rbRatingBoxChart.BoxMaxDisplayItems = 3;
&rbRatingBoxChart.NDMaxDisplayDescLength = 25;
&rbRatingBoxChart.ShowNodeDescription = True;
&rbRatingBoxChart.GridLineType = %ChartLine_Solid;
&rbRatingBoxChart.XAxisTitle = "Performance";
&rbRatingBoxChart.YAxisTitle = "Potential";
&rbRatingBoxChart.NDMaxDisplayDescLength = 15;
&rbRatingBoxChart.BoxMaxDisplayItems = 5;

&rbRatingBoxChart.Height = 400;
&rbRatingBoxChart.Width = 400;
&rbRatingBoxChart.ShowNodeDescription = true;
&rbRatingBoxChart.GridLineType=%ChartLine_Solid;
&rbRatingBoxChart.IsDragable = True;
&rbRatingBoxChart.BoxMaxDisplayItems= 1;
&rbRatingBoxChart.NDMaxDisplayDescLength = 50;
```

5. (Optional) Assign style class names for the chart and x- and y-axis title and labels.

If you do not specify a style class name, the PeopleTools default style sheet is used.

```
&rbRatingBoxChart.Style = "PSCHARTDEFAULT";
&rbRatingBoxChart.XAxisTitleStyle = "PT_RATBOX_XTTL";
&rbRatingBoxChart.YAxisTitleStyle = "PT_RATBOY_YTTL";
&rbRatingBoxChart.XAxisLabelStyle = "PT_RATBOX_XAXIS";
&rbRatingBoxChart.YAxisLabelStyle = "PT_RATBOX_YAXIS";
```

6. (Optional) Specify title and legend properties.

```
&rbRatingBoxChart.MainTitle = "Development Division";
&rbRatingBoxChart.MainTitleStyle="PT_RATBOX_TITLE"
&rbRatingBoxChart.HasLegend = True;
&rbRatingBoxChart.LegendPosition = %ChartLegend_Bottom;
&LegendArray = CreateArray("Architect", "Engineer", "Director", "Manager",
    "Senior Director", "Vice-President");
&LegendImgArray = CreateArray("PT_ACECUBE",
    "PT_WF_PERSON", "PT_STATUS_ALERT_ICN",
    "PT_STATUS_ASSIGNED_ICN", "QE_SUCCSORGCHART", "QE_KPERSON");
&rbRatingBoxChart.SetLegend(&LegendArray);
&rbRatingBoxChart.SetLegendImg(&LegendImgArray);
```

7. Set the node data rowset and record.

The chart refreshes when the `SetRBNodeData` method is called.

```
/* Set the node data rowset and the node record. */
&rbRatingBoxChart.SetRBNodeData(&rsGrid);
&rbRatingBoxChart.SetRBNodeRecord(Record.QE_RATEBOX_DR);
```

8. Add `FieldChange PeopleCode` on the fields `PTXAXISRATINGS` and `PTYAXISRATINGS` if you want to perform other logic after the drag and drop operation.

This example shows a call to the `SetRBNodeData` function to redraw the chart the user changes the values in either of these two fields in the component:

```
/* FieldChange PeopleCode for fields PTXAXISRATINGS and PTYAXISRATINGS*/
&rbRatingBoxChart.SetRBNodeData(&rsGrid);
```

Creating a Chart Using an iScript

You can also create a chart using an iScript. The following example creates a chart, populates it, and then displays it using HTML written to the Response object. The complete code sample is shown.

Note

You can create only `Chart`, `LedGauge`, `RatingGaugeChart`, `StatusMeterGauge`, and `SparkChart` class charts using an iScript.

Function `IScript_GetChart()`

```
Local Chart &cChart;
Local Rowset &rsRowset;

&cChart = CreateObject("Chart");

&rsRowset = CreateRowset(Record.QE_CHART_RECORD);
&rsRowset.Fill("where QE_CHART_REGION= :1", "MIDWEST");
&cChart.SetData(&rsRowset);

&cChart.Width = 400;
&cChart.Height = 300;

&cChart.SetDataYAxis(QE_CHART_RECORD.QE_CHART_SALES);
&cChart.SetDataXAxis(QE_CHART_RECORD.QE_CHART_PRODUCT);
&cChart.SetDataSeries(QE_CHART_RECORD.QE_CHART_REGION);

&cChart.HasLegend = True;
&cChart.LegendPosition = %ChartLegend_Right;

%Response.Write("<HTML>" | &oChart.Html | "</HTML>");
End-Function;
```

See `PeopleCode Language Reference: CreateObject` function.

Complete these steps to create a chart using an iScript:

1. Create the chart object.

For this example, no chart control is available on a page to be referenced. To create the chart object, use the `CreateObject` function. The string passed in to the function must be the name of the class you are instantiating. For instance, to instantiate a chart from the `Chart` class, pass the string `"Chart"`.

```
&cChart = CreateObject("Chart");
```

2. Create a rowset for the chart data and set the chart data.

The `CreateRowset` function creates a standalone rowset data structure. Use the `Fill` method to populate the empty rowset with data. The `SetData` method associates the rowset data with the chart.

```
&rsRowset = CreateRowset(Record.QE_CHART_RECORD);  
&rsRowset.Fill("where QE_CHART_REGION= :1", "MIDWEST");  
&cChart.SetData(&rsRowset);
```

3. Set the height and width of the chart.

Because the chart is not associated with a chart control on a page, you have to specify the size of the chart image to be generated using the `Height` and `Width` properties. The unit of measurement for both of these properties is pixels.

```
&cChart.Width = 400;  
&cChart.Height = 300;
```

4. Set the data axes, series, and legend for the chart.

As with all charts, you must set the data axes. If necessary for your data, also set the data series and the legend.

```
&cChart.SetDataYAxis(QE_CHART_RECORD.QE_CHART_SALES);  
&cChart.SetDataXAxis(QE_CHART_RECORD.QE_CHART_PRODUCT);  
&cChart.SetDataSeries(QE_CHART_RECORD.QE_CHART_REGION);  
  
&cChart.HasLegend = True;  
&cChart.LegendPosition = %ChartLegend_Right;
```

5. Create the response html.

Use the `Write Response` class method to generate the chart, retrieving the html for the chart using the `Chart` class property `"Html"`.

```
%Response.Write("<HTML>" | &oChart.Html | "</HTML>");
```

Note

If one or more labels does not render in the chart, increase the width of the chart, use shorter label text, or reduce the data set being charted.

Creating a Timeline Chart

Complete the following steps to create a timeline chart with two series:

1. Place a chart control on a page in Application Designer.
2. Create an instance of the Timeline class in PeopleCode.

```
&oTChart = GetTimeline(QE_CDEMO_WRK.QE_CHART_TIMELINE);
```

3. Specify labels for the series.

```
&oTChart.SetSeriesLabels(CreateArray("TimeLine Series 1", "TimeLine Series 2"));
```

4. Set the scale of the major axis.

```
&oTChart.MajorAxisScale = "quarters";
```

5. Set the scale of the minor axis.

```
&oTChart.MinorAxisScale = "months";
```

6. Set zoom order of the timeline.

```
&oTChart.MinorAxisZoomOrder = CreateArray("months", "weeks");
```

7. Specify start time of the timeline.

```
&oTChart.Start = DateTimeValue("2012-11-01 00:30:40.12-0600");
```

8. Specify end time of the timeline.

```
&oTChart.End = DateTimeValue("2013-12-30 00:30:40.12-0600");
```

9. Set the record for chart data.

```
&oTChart.SetData(Record.QE_TLINE_DATA);
```

10. Specify the field representing the identifier for the time line series.

```
&oTChart.SetDataSeries(QE_TLINE_DATA.QE_TIMELINE_SERIES);
```

11. Specify the field for the start time of the timeline item.

```
&oTChart.SetDataItemStart(QE_TLINE_DATA.QE_TIMELINE_START);
```

12. Specify the field for the description to display on the timeline item.

```
&oTChart.SetDataItemDescription(QE_TLINE_DATA.QE_DESCR50);
```

13. Specify the field for the title to display on the timeline item.


```
&OTChart.SetDataItemTitle(QE_TLINE_DATA.QE_CHARTTITLE);
```

14. Specify the timeline orientation.

```
&OTChart.Orientation = %Chart_Vertical;
```

The preceding lines of PeopleCode generate the following timeline chart assuming that sample data is provided for the chart.

A resulting timeline chart.

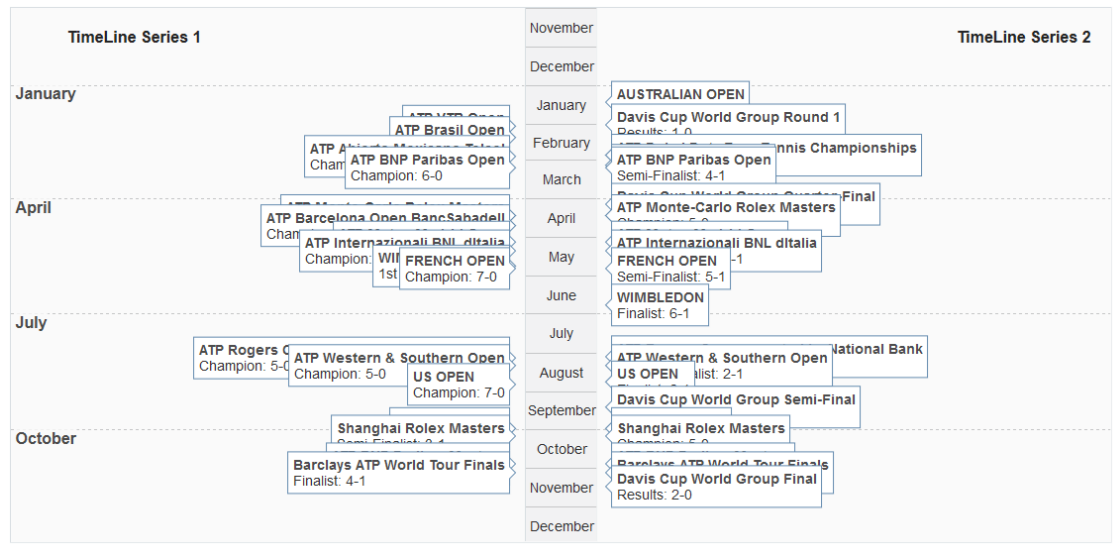

Desupported Chart Class Methods

This section lists the desupported Chart class methods in alphabetical order.

Refresh method: Chart class

Syntax

```
Refresh()
```

Description

Note

This method has been desupported and remains for backward compatibility only. Use instead the SetData method or SetOldData method.

If you make a change to the underlying data of a chart, call the SetData method again to update the chart.

You don't need to refresh after setting a property or method of the chart itself, such as setting the starting point or changing colors. When a method or property is used, the chart is automatically refreshed.

Parameters

None.

Returns

None.

Example

```
&MyChart.Refresh();
```

Related Topics

- [SetData method: Chart class](#)
- [SetOldData method: Chart class](#)

SetDataAnnotations method: Chart class

Syntax

```
SetDataAnnotations(Record_Name.Field_Name1, ...)
```

Description**Note**

This method has been desupported and remains for backward compatibility only. Use instead the `SetDataLabel` and `SetDataLabelPosition` methods.

Use the `SetDataAnnotations` method to specify an optional text label that can be associated with each point in the chart.

This method is applicable for scatter and bubble charts only; it is ignored for all other chart types

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the annotations for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the <code>SetDataYAxis</code> method.

Returns

None.

Related Topics

- [SetDataLabel method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetDataGlyphScale method: Chart class

Syntax

```
SetDataGlyphScale(Record_Name.Field_Name1, ...)
```

Description**Note**

This method has been desupported and remains for backward compatibility only. Use instead the SetDataZAxis method.

Use the SetDataGlyphScale method to specify a field that contains numerical data defining the size of each glyph for bubble charts (scatter charts). These values are mapped to a range of size values between a predefined minimum and maximum.

This method affects bubble charts only (%ChartType_2DBubble).

Parameters

Parameter	Description
<i>Record_Name.Field_Name1</i> , ...	Specify the name of the record and one or more fields on that record that contain the sizes for the data items for the chart. Note: The number and order of fields specified must correspond to the order specified by the SetDataYAxis method.

Returns

None.

Related Topics

- [SetDataZAxis method: Chart class](#)
- [SetDataYAxis method: Chart class](#)

SetOLDataAnnotations method: Chart class

Syntax

```
SetOLDataAnnotation(Record_Name.Field_Name)
```

Description

This method has been desupported and is ignored.

SetOLDataGlyphScale method: Chart class

Syntax

```
SetOLDataGlyphScale(Record_Name.Field_Name)
```

Description

This method has been desupported and is ignored.

Desupported Chart Class Properties

This section lists the desupported Chart class properties in alphabetical order.

GridLines property: Chart class

Description

This property has been desupported and is ignored. Use instead the PSVERTICALGRIDLINES and PSHORIZONTALGRIDLINES style classes to control grid line visibility and style.

GridLineType property: Chart class

Description

This property has been desupported and is ignored. Use instead the PSVERTICALGRIDLINES and PSHORIZONTALGRIDLINES style classes to control grid line visibility and style.

HighlightSelectedDataPoint property: Chart class

Description

Use this property to specify a Boolean value indicating whether a data point selected by a user is highlighted on a chart or not. The default value is False.

! Important

The HighlightSelectedDataPoint property has been desupported and retained for backward compatibility only. Do not use this property to enable data point selection in newly created charts. Instead, use the DataSelectionMode property, the SetSelectedData method, and the ChartClientState class to manage data item selection in charts. The HighlightSelectedDataPoint property is incompatible with this new methodology.

This property is read/write.

Example

```
&oChart.HighlightSelectedDataPoint = True;
```

Related Topics

- [Selecting and Highlighting Data Points](#)
Users can select one or more data points (bars, slices, and so on) on a chart. Selection creates a highlight around the data item. Users can also de-select one or more of these items.

LegendStyle property: Chart class

Description

This property has been desupported and is ignored.

LineType property: Chart class

Description

This property has been desupported and is ignored.

MainTitleOrient property: Chart class

Description

This property has been desupported and is ignored.

MainTitleStyle property: Chart class

Description

This property has been desupported and is ignored.

Use instead the TitleStyle property.

OLLineType property: Chart class

Description

This property has been desupported and is ignored.

RevertToPre850 property: Chart class

Description

This property has been desupported and is ignored.

RotationAngle property: Chart class

Description

This property has been desupported and is ignored.

SetChartURL property: Chart class

Description

Note

This property has been desupported and remains for backward compatibility only. Use instead the ChartURL property.

Use this property to specify a URL to be launched when the chart background is clicked.

The IsChartDrillable property must be set to True to enable clicking on the chart background.

Related Topics

- [ChartURL property: Chart class](#)

Style property: Chart class

Description

This property has been desupported and is ignored.

StyleSheet property: Chart class

Description

This property has been desupported and is ignored.

Related Topics

- [Styling PeopleSoft Charts](#)
PeopleSoft charts are flexible in terms of styling. Styling covers colors and fonts that you see when you look at a chart. Style specifications are generally defined in Application

Designer style sheets so that they are accessible to application developers. Specifically, they are defined in sub style sheets that are then attached to high-level system style sheets such as PSSTYLEDEF_TANGERINE which are used throughout a system ensuring consistent look and feel.

XAxisCross property: Chart class

Description

This property has been desupported and is ignored.

XAxisScaleResolution property: Chart class

Description

This property has been desupported and is ignored.

XAxisStyle property: Chart class

Description

This property has been desupported and is ignored.

XAxisTitleStyle property: Chart class

Description

This property has been desupported and is ignored.

XRotationAngle property: Chart class

Description

This property has been desupported and is ignored.

YAxisScaleResolution property: Chart class

Description

This property has been desupported and is ignored.

YAxisStyle property: Chart class

Description

This property has been desupported and is ignored.

YAxisTitleStyle property: Chart class

Description

This property has been desupported and is ignored.

YRotationAngle property: Chart class

Description

This property has been desupported and is ignored.

ZRotationAngle property: Chart class

Description

This property has been desupported and is ignored.

Component Interface Classes

Understanding Component Interface Class

Component Interfaces are the focal points for externalizing access to existing PeopleSoft components. They provide real-time synchronous access to the PeopleSoft business rules and data associated with a component outside the PeopleSoft online system. Component Interfaces can be viewed as "black boxes" that encapsulate PeopleSoft data and business processes, and hide the details of the structure and implementation of the underlying page and data.

Component Interfaces are one of the many APIs that PeopleSoft provides for enabling integration with other systems.

A Component Interface maps to one, and only one, PeopleSoft component. The *Component Interface object*, instantiated from a session object, is created at runtime to access the data specified by the Component Interface.

When you instantiate a Component Interface object:

- All the PeopleCode programs associated with the record fields, pages, component, and so on, and
- The runtime component processor still perform all of the work that they do in the online environment.

The exceptions are any GUI manipulation found in a PeopleCode program, and search dialog specific processing.

Component Interfaces are programmable through a C interface, an OLE/COM or C/C++ interface, and through PeopleCode. Application Engine programs, message notification programs, or any other PeopleCode programs are able to use Component Interfaces.

Like a component, you create the structure of a Component Interface in Application Designer, then at runtime, you populate the structure with data. This document is concerned with the runtime portion of a Component Interface.

When you populate a Component Interface with data, the first thing you fill out are its keys, as you would in a component. These can be keys for getting an existing instance of the data or for creating a new instance of the data.

In addition to keys, a Component Interface is composed of *properties* and *methods*.

- Component Interface *properties* provide access to the data in a component buffer.
- Component Interface *methods* are functions that can be called to perform operations on a Component Interface.

There are two types of both methods and properties: standard and user-defined. Standard properties and methods are provided automatically when you create a Component Interface. They perform operations common to all Component Interfaces, such as indicating what mode to operate the Component Interface, saving, or creating a Component Interface. User-defined properties are the specific record fields that an application developer has chosen to expose to an external system with the Component Interface. User-defined methods are PeopleCode

programs that an application developer can write to perform operations on a Component Interface. Each is specific to that Component Interface.

At runtime if drop zone configurations are detected, the Component Interface properties of the components from the custom subpages can be accessed and updated using Component Interfaces objects similar to other properties.

You can instantiate a Component Interface object only from a session object. Through the session object you can control access to the Component Interface, check for errors, control the runtime environment, and so on.

Related Topics

- [Reusing Existing Code](#)
One of the advantages of using a Component Interface is that it enables you to reuse existing PeopleCode and business logic. However, a Component Interface isn't exactly equivalent to a component, which means there are a few key areas in which you should expect differences in behavior between a Component Interface and the component it is based on. This section discusses these differences.
- [Understanding Session Class](#)
PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.
- [Understanding Component Interface Class](#)
Component Interfaces are the focal points for externalizing access to existing PeopleSoft components. They provide real-time synchronous access to the PeopleSoft business rules and data associated with a component outside the PeopleSoft online system. Component Interfaces can be viewed as "black boxes" that encapsulate PeopleSoft data and business processes, and hide the details of the structure and implementation of the underlying page and data.


Life Cycle of a Component Interface

At runtime, there are certain things you want to do with a Component Interface, such as getting an instance of it, populating it with data, and so on. The following is an overview of this process. These steps are expanded in other sections.

1. Execute the `GetComplntfc` method on the PeopleSoft session object to get a Component Interface.
2. Set the key values for the Component Interface object. If the keys you specify don't uniquely describe a component (partial keys), proceed to step 3. If the keys uniquely describe a component, skip to step 4.
3. Do *one* of the following:
 - Execute the `Find` standard method on the Component Interface. This returns a collection of Component Interfaces with their key values filled out. The user can then select the unique Component Interface they want.
 - Execute either the `Get` or `Create` standard method to instantiate the Component Interface (populate it with data.)
4. Get property values, set property values, or execute user-defined methods. Setting a property value will fire the standard PeopleSoft business rules for the field associated with the property (any PeopleCode program associated with `FieldChange`, `RowInsert`, and so on.)

5. Execute the Save standard method to fire the standard PeopleSoft save business rules (any PeopleCode programs associated with SavePreChange, WorkFlow, and so on.) and commit any changes to the database.
6. At any point, the standard method Cancel can be executed to reset the Component Interface to its state in step 1.

The following is a flow chart diagram of Component interface life cycle such as getting an instance of it, populating it with data, and so on.

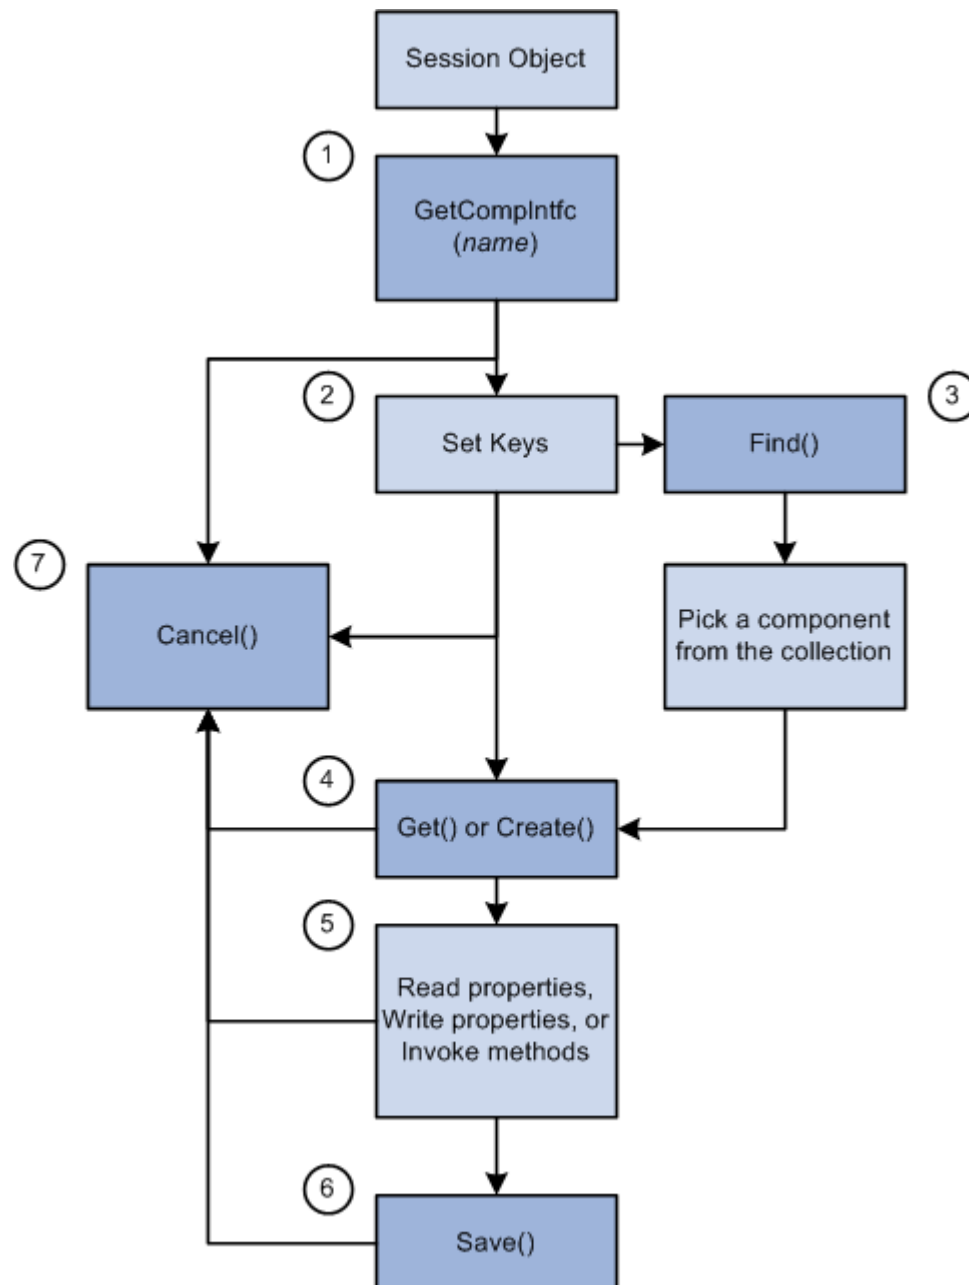

Setting Component Interface Keys

The keys for a Component Interface are based on the key fields of the underlying component. There can be different types of keys for a Component Interface.

- **CREATEKEYS:** A list of the primary key fields of the search record specified to be used in Add mode for the component. This list is automatically generated.
- **GETKEYS:** A list of the primary (required) key fields on the search record. This list is automatically generated.
- **FINDKEYS:** A list of primary and alternate key fields on the primary search record for the component.

If the Component Interface has **CREATEKEYS**, these are the keys you must set before you execute the `Create()` method to create a new instance of the data. If the Component Interface doesn't have **CREATEKEYS**, use the **GETKEYS** to specify a new instance of the data.

Use either the **GETKEYS** or **FINDKEYS** to specify an existing instance of the data.

To set key values, use the field names listed under **GETKEYS**, **CREATEKEYS** or **FINDKEYS** like properties on the Component Interface object. The following example sets the **CREATEKEYS** values to create a new instance of the data.

```
&MYCI = GetCompIntfc(CompIntfc.EXPRESS_ISSUE);  
&MYCI.BUSINESS_UNIT = "H01B";  
&MYCI.INTERNAL_FLG = "Y";  
&MYCI.ORDER_NO = "NEXT";  
&MYCI.Create();
```

Standard and User-Defined Component Interface Methods

Every Component Interface comes with a standard set of methods:

- `Cancel()`
- `Create()`
- `Find()`
- `Get()`
- `Save()`

Use these methods during runtime to affect the data of the Component Interface.

The application developer can, at design time, disable any of these methods for the Component Interface.

In addition, an application developer can write their own methods. These methods are written as Functions using Component Interface PeopleCode. For example, suppose you wanted to be able to copy an instance of Component Interface data. You might write your own `Clone` method.

Note

User-defined method names must *not* be named `GetProperty`. The C header for Component Interfaces creates functions with that name so you can access each property. If you create your own `GetProperty` functions, you receive errors at runtime. User-defined methods can take only simple types of arguments (such as number, character, and so on) because user-defined methods can be called from C/C++ as well as from PeopleCode. PeopleCode can use more complex types (like rowset, array, record, and so on), but these types of arguments are unknown to C/C++.

Related Topics

- [Component Interface Class Methods](#)
This section discusses the Component Interface class methods. The methods are discussed in alphabetical order.
- [Component Interface Class Properties](#)
In this section, we discuss the Component Interface class properties. The properties are discussed in alphabetical order.
- Component Interfaces: Creating User-Defined Methods

Accessing Component Interface Standard Properties

Every Component Interface comes with a standard set of properties. These properties can be divided as follows:

Properties that affect how the Component Interface is executed

The following properties affect how a component interface is executed:

- EditHistoryItems
- GetHistoryItems
- InteractiveMode

These properties must be set before the Component Interface is populated with data. That is, you must set these properties before you use the Get or Create methods.

EditHistoryItems and GetHistoryItems work together to determine how data is accessed:

- If EditHistoryItems is False (the default) and GetHistoryItems is True, you access the data in the Component Interface in a similar manner as if you were accessing a component in update/display All mode. This means all history rows are returned, however, you can edit rows only with a date set in the future.
- If EditHistoryItems is True and GetHistoryItems is True, you access the data in the Component Interface in a similar manner as if you were accessing a component in correction mode. This means all history rows are returned, and you can edit them.
- If GetHistoryItems is False, you access the data in the Component Interface in a similar manner as if you were accessing a component in update mode. The EditHistoryItems has no effect when GetHistoryItems is False.

InteractiveMode causes the Component Interface to emulate an online component. For example, if you set a value for a field in a Component Interface and you have set InteractiveMode to True, then any FieldChange PeopleCode programs associated with that field fire as soon as you set that value.

Properties that return information about the structure of the Component Interface

The following properties return information about the structure of the Component Interface:

- CreateKeyInfoCollection
- FindKeyInfoCollection
- GetKeyInfoCollection
- PropertyInfoCollection

Related Topics

- [Component Interface Class Properties](#)


In this section, we discuss the Component Interface class properties. The properties are discussed in alphabetical order.

Accessing User-Defined Component Interface Properties

Every user-defined property in a Component Interface *definition* can be used like a property on the *object* instantiated from that Component Interface at runtime.

For example, the following Component Interface definition has RETURN_DT defined as one of its properties.

This example illustrates the fields and controls on the RETURN_DT Component Interface property highlighted. You can find definitions for the fields and controls later on this page.

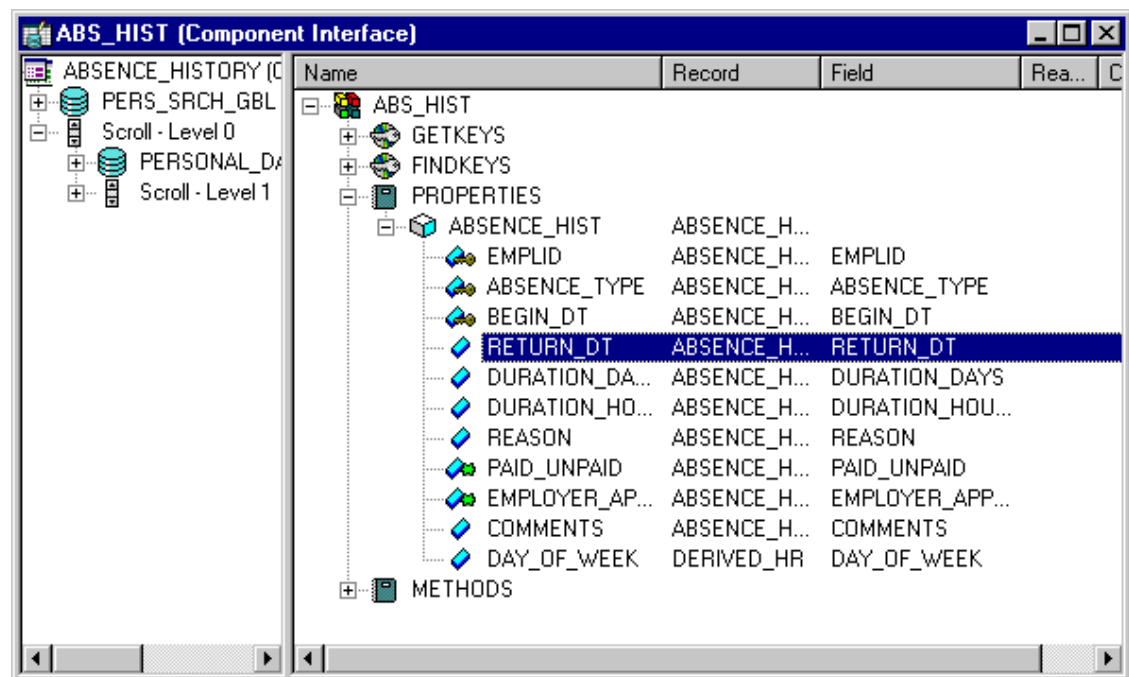

At runtime, you can use PeopleCode to assign a value to that property (field), or to access the value of that field.

```
&MYCI.RETURN_DT = "05/05/2000";
```

```
/* OR */
```

```
&DATE = &MYCI.RETURN_DT;
```

Data Type of a Component Interface Object

Component Interfaces are declared as type ApiObject. For example,

```
Local ApiObject &MYCI;
```

Note

Component Interface objects can be declared only as Local.

Scope of a Component Interface Object

A Component Interface can be instantiated from PeopleCode, from a Visual Basic program, from Java, COM and C/C++.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

If you're instantiating a Component Interface from an online page, after you finish working with the component, you may want to refresh your page. The Refresh method, on a rowset object, reloads the rowset (scroll) using the current page keys. This causes the page to be redrawn. GetLevel0().Refresh() refreshes the entire page. If you want a particular scroll only to be redrawn, you can refresh just that part.

Considerations Using Component Interfaces and Related Languages

If you update a field using a Component Interface through an external program (such as Java, VB, and so on) the Related Language Table gets updated, even if they are using a base language of ENG.

Considerations Using Component Variables With Component Interfaces

A component variable is scoped locally to its component or its Component Interface. This means that you cannot use a component variable to share data between a component and a Component Interface. In order to share information between components, use global variables.

If your page (component) calls a Component Interface (using the existing session), that in turn initializes a component variable, that component variable is shared with the calling component. When the Component Interface is closed, the component variable is no longer in scope.

When the calling component is closed, any component scoped variables created by it or by the Component Interface go out of scope.

Related Topics

- [Refresh method: Rowset class](#)
- [CompIntfPropInfoCollection Object Properties](#)
This section explains the CompIntfPropInfoCollection Object properties.

Implementing a Component Interface

After you create your Component Interface definition, you can use PeopleCode to access it. This PeopleCode can be long and complex. Rather than write it directly, you can drag and drop the Component Interface definition from Application Designer Project View into an open PeopleCode edit pane. Application Designer analyzes the definition and generates initial PeopleCode as a template, which you can modify.

You can also access your Component Interface using COM. You can automatically generate a Visual Basic or a C template, similar to the PeopleCode template, to get you started.

The following are the usual actions that you perform with a Component Interface:

- Create a new instance of data
- Get an existing instance of data
- Retrieve a list of instances of data

The following procedures cover each of these actions in more detail.

Another standard action is inserting or deleting a row of data (an item). This involves traversing a Component Interface (going from level zero to level one, from level one to level two, and so on) and accessing data collections.

You may want to work with effective-dated information. There are several properties you can set to allow you to do this.

In addition to these standard actions, you can also look at the structure of a Component Interface.

Related Topics

- [Create a New Instance of Data Example](#)
The following is an example of how to create a new instance of a Component Interface.
- [Getting an Existing Instance of Data Example](#)
The following is an example of how to get an existing instance of a Component Interface.
- [Retrieving a List of Instance of Data Example](#)
The following is an example of how to retrieve a list of instances of data.
- [Traversing a Component Interface and Using Data Collections](#)
The data in a Component Interface can be contained in a hierarchy: like the page it's built on, there may be data at level zero, level one, level two, and so on.
- [Working With Effective-Dated Data](#)
When you work with effective-dated data, use some combination of the following methods:
- [Accessing the Structure of a Component Interface](#)
The structure of a Component Interface can be accessed using a `ComplntfPropInfoCollection` object. You access a `ComplntfPropInfoCollection` object from a `ComplntfPropInfoCollection` collection. There is more than one way to instantiate a `ComplntfPropInfoCollection` collection.

Component Interface Methods and Timeouts

The file `pstools.properties` controls when a Component Interface method times out. If you're having problems with methods timing out, you may want to change the values in this file. This file is located in the default directory for the application you're running. If this file isn't in this directory, copy it into the directory before you make your changes to it.

Traversing a Component Interface and Using Data Collections

The data in a Component Interface can be contained in a hierarchy: like the page it's built on, there may be data at level zero, level one, level two, and so on.

Each level of data in a Component Interface is known as a collection, such as:

```
level zero  
  
-- level one (Collection)
```

```
-- Level 2 (Collection)
```


A *collection* is a set of similar things, like a group of already existing Component Interfaces. Most collections have the same standard properties and methods, with some additional ones specific to that collection. For example, all collections have the property *Count*, which indicates how many items are in that collection, but only a data collection has the method *ItemByKey*.

A *data collection* is the collection of data, available at runtime or during test mode, associated with a particular scroll (or record.) The data collection object returns information about every *row of data* (item) that is returned for that record at runtime.

To access the level two collection, in general, you could use the following:

```
&Level_1 = &CI.Level_1;  
&Level_1_Item = &Level_1.Item(ItemNumber);  
  
&Level_2 = &Level_1_Item.Level_2;
```

This example illustrates the fields and controls on the Sample Component Interface with collection highlighted. You can find definitions for the fields and controls later on this page.

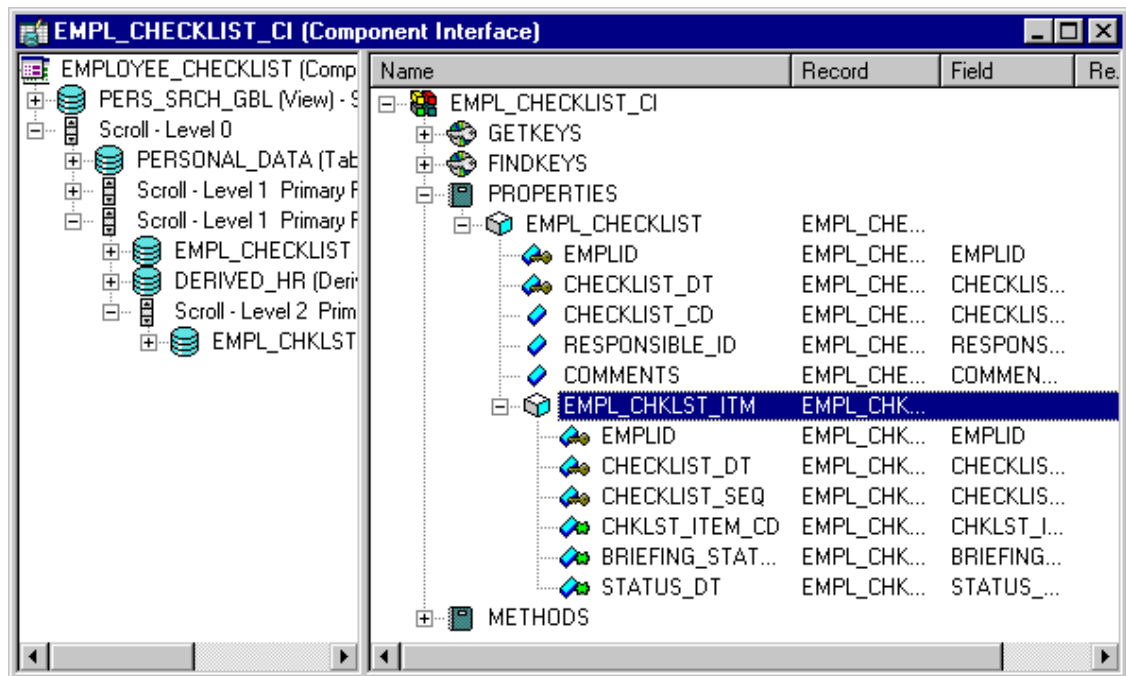

This example shows a Component Interface with a two-level hierarchy, that is, *two* data collections: EMP_CHECKLIST and EMP_CHKLIST_ITM. To get a data collection for the first level, use the following code:

```
&Level1 = &MYCI.EMPL_CHECKLIST;
```


To access the secondary scroll (EMPL_CHKLIST_ITM) you have to get the appropriate row (item) of the upper level scroll first:

```
&Level1 = &MYCI.EMPL_CHECKLIST;  
&Item = &Level1.Item(1);  
&Level2 = &Item.EMPL_CHKLIST_ITM;
```

Note

Scrolls represent a hierarchical order. You must get the first level row that contains the secondary scroll *before* you can access the secondary scroll.

Every data collection has a set of methods and standard properties.

Related Topics

- [Inserting or Deleting a Row of Data Example](#)
The CopyRowset and CopyRowsetDelta methods use the primary database name of a scroll, not the name you may give a collection.
- [Data Collection Methods](#)
A *data collection* is the collection of data, available at runtime or during test mode, associated with a particular scroll (or record.) The data collection object returns information about every *row of data* (item) that is returned for that record at runtime.
- [Data Collection Properties](#)
This section provides an overview of the Data Collection properties.
- PeopleCode Developer's Guide: Understanding Data Buffer Access

Working With Effective-Dated Data

When you work with effective-dated data, use some combination of the following methods:

- CurrentItem
- GetEffectiveItem

Both these methods return an item, however, there are some differences:

- The CurrentItem method takes no parameters, so it bases the item it returns on the *current system date*.
- The GetEffectiveItem method bases the item it returns on a *user-provided date*. They all perform the same logic, they just use a different date.

Note

To show all history for an effective-dated collection, you must set GetHistoryItems to True before you populate the Component Interface.

Related Topics

- [CurrentItem method: Data collection](#)

- [GetEffectiveItem method: Data collection](#)
- [GetHistoryItems property: Component Interface class](#)
- [Inserting Effective-Dated Data Example](#)
You can rename a collection in a Component Interface. For example, suppose you had the same record at level zero and at level one. You may want to rename the level one data collection to reflect this. The data in a data collection is associated with the primary database record of a scroll, *not* with the name you supply.
- [Inserting Effective-Dated Data Example Using Visual Basic](#)
Here's a code example in Visual Basic that does the same thing as the previous code example.

How a Developer Uses GetEffectiveItem

If a user is making an update to an effective-dated record, they don't always want to insert a row at the end.

Suppose the database contained the following data:

EMPLID	EFFDT	SEQNO
8000	3/1/99	0
8000	7/1/99	0
8000	9/1/99	0
8000	12/1/99	0

Now suppose the user wants to enter info with EFFDT of 11/1/99. If they were looking at a PeopleSoft component, they would visually scan to see where that date falls and then press **ALT+7** and **ENTER** at the row that they want to insert after.

GetEffectiveItem enables you to pass in the correct effective date, instead of having to loop through every item in the collection doing a comparison, looking for the correct item.

Why Can't it Just Go at the End?

The InsertItem method simulates pressing **ALT+7** and **ENTER** online to insert a row in a scroll. Part of the logic that occurs in the Component Processor is that if the scroll is effective-dated, the **ALT+7** and **ENTER** carries the values forward from the previous row. This functionality is still there if you use InsertItem at the end of the collection, but the values may be incorrect.

Reusing Existing Code

One of the advantages of using a Component Interface is that it enables you to reuse existing PeopleCode and business logic. However, a Component Interface isn't exactly equivalent to a component, which means there are a few key areas in which you should expect differences in behavior between a Component Interface and the component it is based on. This section discusses these differences.

Differences in Search Dialog Processing

When you run a Component Interface, the *SearchInit*, *SearchSave*, and *RowSelect* events don't fire. This means that any PeopleCode associated with these events won't run. The first event to run is *RowInit*.

Differences in PeopleCode Event and Function Behavior

PeopleCode events and functions that relate exclusively to the page interface (the GUI) and online processing can't be used by Component Interfaces. These include:

- Menu PeopleCode and pop-up menus.
The ItemSelected and PrePopup PeopleCode events are not supported. In addition, the DisableMenuItem, EnableMenuItem, and HideMenuItem functions aren't supported.
- Transfers between components, including modal transfers.
The DoModal, EndModal, IsModal, Transfer, TransferPage, DoModalComponent, TransferNode, TransferPortal, and IsModalComponent functions cannot be used.
- Cursor position.
SetControlValue cannot be used.
- WinMessage cannot be used.
- Save in the middle of a transaction.
DoSave cannot be used.
- The page Activate event cannot be used.

When executed using a component interface, these functions do nothing and return a default value. In addition, using the Transfer function terminates the current PeopleCode program.

For the unsupported functions, you should put a condition around them, testing whether there's an existing Component Interface.

```
If %ComponentName Then
    /* process is being called from a Component Interface */
    /* do CI specific processing */
Else
    /* do regular processing */
    . . .
End-if;
```

Using %Menu Conditions

If you associate a Component Interface definition with a menu in Application Designer, a PeopleCode program that conditionally checks for that menu runs when the Component Interface is executed. For example, suppose you associate a Component Interface with the MP_HR_MENU. The following PeopleCode program, if called from that Component Interface, executes:

```
If %Menu = MP_HR_MENU Then
```

Related Topics

- Component Interfaces: Associating Component Interfaces with Menus

Session Class Methods

Component Interfaces don't have any built-in functions. They are instantiated from the Session class.

This section discusses the Session class methods used to instantiate Component Interfaces. The methods are discussed in alphabetical order.

FindCompIntfcs method: Session class

Syntax

```
FindCompIntfcs([ComponentName])
```

Description

The FindCompIntfcs method, used with the Session object, returns a reference to a Component Interface collection, filled with zero or more Component Interfaces. The *ComponentName* parameter takes a string value. You can use a partial value to limit the set of Component Interfaces returned. You can also specify a null value, that is, two quotation marks with no space between them, (""), to return the entire list of Component Interfaces available.

Using the FindCompIntfcs method is equivalent to using File, Open, and selecting Component Interface in Application Designer.

Example

In the following example, a partial key was used to open all components starting with "APP".

```
Local ApiObject &MYSESSION;  
Local ApiObject &MYCI;  
  
&MYSESSION = %Session;  
&MYCICOLL = &MYSESSION.FindCompIntfcs("APP");  
&MYCI = &MYCICOLL.First();
```

GetCompIntfc method: Session class

Syntax

```
GetCompIntfc([COMPINTFC.]ComponentName)
```

Description

The GetCompIntfc method, used with the session object, returns a reference to a Component Interface. *ComponentName* when used by itself takes a string value. If you use COMPINTFC.*componentname* it isn't a string value: it's a constant that automatically is renamed in your code if the Component Interface definition is ever renamed. You must specify an existing Component Interface, otherwise you receive a runtime error.

Example

```
Local ApiObject &MYSESSION;  
Local ApiObject &MYCI;  
  
&MYSESSION = %Session;  
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.PERSONAL_DATA_BC);
```

The following example uses the '@' operator to dynamically call a Component Interface from PeopleCode.

```
&MYCI = &MYSESSION.GetCompIntfc(@"CompIntfc." | &CIname));
```

ValidateCompIntfc method: Session class

Syntax

```
ValidateCompIntfc(ComponentInterfaceName)
```

Description

The ValidateCompIntfc method, used with the Session object, returns an integer value indicating whether the validation is successful. The validation fails if no component interface exists with the given name. The primary purpose of this method is to validate the successful compilation of all PeopleCode programs associated with both the component and the component interface. In addition, this method verifies other relationships of the component interface to the component, such as, but not limited to checking whether the component interface:

- Contains a reference to an invalid component.
- Is defined with CREATEKEYS, but the component does not allow the add action.
- Is defined with CREATEKEYS, but the specified field is not a search key.
- Has a reference to an invalid field.
- Has a reference to an invalid record.
- Is defined with FINDKEYS, but the specified field is not a search key or an alternate search key.
- Is defined with GETKEYS, but the specified field is not a search key.
- Has references to a search or add record that is invalid.

Parameters

Parameter	Description
<i>ComponentInterfaceName</i>	Specify the component interface name as a string.

Returns

An integer value indicating whether the validation is successful: 0 indicates success; any non-zero value indicates failure.

Example

In the following example, a component interface with name "DEMOAPP_CI" is validated.

```
Local ApiObject &MYSESSION;  
Local integer &nRet;  
  
&MYSESSION = %Session;  
&nRet = &MYSESSION.ValidateCompIntfc("DEMOAPP_CI");  
  
If &nRet <> 0 Then  
    /* Failure Case */  
Else  
    /* Success Case */  
End-If;
```

Component Interface Collection Methods

A Component Interface collection is a list of the available Component Interfaces. An equivalent list is generated by starting Application Designer, selecting File, Open, Component Interface.

You get a Component Interface collection by using the FindCompIntfcs method with a session object.

First method: Component Interface collection

Syntax

First()

Description

The First method returns the first Component Interface in the Component Interface collection object executing the method. This returns the structure of the Component Interface with only the key fields filled in. The rest of the data is not present. To populate the Component Interface with data, you must set the key values and use the Get method.

Example

```
&MYCI = &CICOLLECTION.First();
```

Item method: Component Interface collection

Syntax

Item(*number*)

Description

The Item returns the Component Interface that exists at the number position in the Component Interface collection executing the method. This returns the structure of the Component

Interface with only the key fields filled in. The rest of the data is not present. To populate the Component Interface with data, you must set the key values and use the Get method. *number* takes a number value.

Example

```
For &I = 1 to &COLLECTION.Count;  
&MYCI = &COLLECTION.Item(&I);  
/* do processing */  
End-For;
```

Next method: Component Interface collection

Syntax

Next()

Description

The Next method returns the next Component Interface in the Component Interface collection object executing the method. You can use this method only after you have used either the First or Item methods: otherwise the system doesn't know where to start. This returns the structure of the Component Interface with only the key fields filled in. To populate the Component Interface with data, you must set the key values and use the Get method.

Example

```
&MYCI = &COLLECTION.Next();
```

Component Interface Collection Property

This section discusses the Count property.

Count property: Component Interface collection

Description

This property returns the number of Component Interfaces in the Component Interface collection, as a number.

This property is read-only.

Example

```
&COUNT = &MYCI_COLLECTION.Count;
```

Component Interface Class Methods

This section discusses the Component Interface class methods. The methods are discussed in alphabetical order.

Cancel method: Component Interface class

Syntax

```
Cancel()
```

Description

The Cancel method cancels the instance of the Component Interface object executing the method, rolling back any changes that were made. This sets the Component Interface state to the same state it was in immediately after it was created by GetComplntfc. This closes the Component Interface.

Parameters

None.

Returns

A Boolean value: True if component was successfully cancelled, False otherwise.

CopyRowset method: Component Interface class

Syntax

```
CopyRowset(&Rowset [, InitialRow] [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
[RECORD.source_recname1, RECORD.target_recname1  
[, RECORD.source_recname2, RECORD.target_recname2]]. . .
```

Description

The CopyRowset method copies the specified rowset object to the Component Interface executing the method, copying like-named record fields and data collections (child rowsets) at corresponding levels. If pairs of source and destination record names are given, these are used to pair up the records and data collections *before* checking for like-named record fields.

CopyRowset uses the Page Field order when copying properties. This helps ensure that dependent fields are set in the required order.

Note

This method works in PeopleCode only. This method uses the names of the records in the collection, *not* the name you may give the collection when you create the Component Interface.

If there are blanks in *source* rowset or record, they are copied over to the Component Interface only if the field's IsChanged property is set to True. Otherwise blanks are *not* copied.

Use this method when you are using a Component Interface to verify the data in your application message.

Note

The structure of the rowset you're copying data from must exactly match the existing rowset structure, with the same records at level zero, 1, 2, and so on. CopyRowset is intended to be used with a notification process, that is, with message data. As all notifications work only in two-tier mode, CopyRowset works only in two-tier mode.

Parameters

Parameter	Description
<i>&Rowset</i>	Specify an existing, instantiated rowset object that contains data.
<i>InitialRow</i>	Specify the initial transaction row to begin with. This parameter provides a quick way to loop through a rowset that has multiple level zero rows. The default value for this parameter is 1.
<i>record_list</i>	Specify a list of source and target record names. All <i>source_recnames</i> are records being copied from, in the rowset object being copied from. All <i>target_recnames</i> are records being copied to, in the Component Interface being copied to.

Returns

None.

Example

The following example would be in your notification PeopleCode. The Exit(1) causes all changes to be rolled back, and the message is marked with the status ERROR so you can correct it.

```
Local message &MSG;  
Local ApiObject &SESSION;  
Local ApiObject &PO;  
Local rowset &ROWSET;  
  
&MSG = %IntBroker.GetMessage();  
&ROWSET = &MSG.GetRowset();  
  
&SESSION = %Session;  
  
If &SESSION <> NULL Then  
/* Session connected correctly */  
/* Set key values to create component */  
&PO = &SESSION.GetCompIntfc(COMPINTFC.PO);  
&PO.BU = &MSG(&I).PO_HDR.BU.Value;  
&PO.PO_ID = &MSG(&I).PO_HDR.PO_ID.Value;  
&PO.Create();  
Exit(1);
```

```

&P0.CopyRowset(&ROWSET);
If NOT (&P0.Save()) Then
    Exit(1);
End-if;
Else
    /* do error processing */
End-If;

```

The following example loops through all the transactions of a message rowset.

```

Local message &MSG;
Local ApiObject &SESSION;
Local ApiObject &CI;
Local rowset &ROWSET;

&MSG = %IntBroker.GetMessage();
&ROWSET = &MSG.GetRowset();
&SESSION = %Session;
If &SESSION <> Null Then
    &CI = &SESSION.GetCompIntfc(CompIntfc.VOL_ORG);
    &I = 0;
    While (&I < &ROWSET.RowCount)
        &I = &I + 1;
        &CI.VOLUNTEER_ORG = &ROWSET.GetRow(&I).VOLNTER_ORG_2.
VOLUNTEER_ORG.Value;
        If &CI.Create() Then
            If &CI.CopyRowset(&ROWSET, &I, Record.VOLNTER_ORG_TBL, Record.⇒
VOLNTER_ORG_TBL) Then
                /* App specific processing */

                If Not &CI.Save() Then
                    Winmessage("Save Failed");
                    /* Other app specific processing */
                End-If;
            End-If;
        End-If;
        &CI.Cancel();
    End-While;
End-If;

```

CopyRowsetDelta method: Component Interface class

Syntax

```
CopyRowsetDelta(&Rowset [, InitialRow] [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
[RECORD.source_recname1, RECORD.target_recname1
[, RECORD.source_recname2, RECORD.target_recname2]]. . .
```

Description

The CopyRowsetDelta method copies the changed rows in the specified rowset object to the Component Interface executing the method, copying like-named record fields and data collections (child rowsets) at corresponding levels. If pairs of source and destination record names are given, these are used to pair up the records and data collections *before* checking for like-named record fields.

Note

This method works in PeopleCode only. This method uses the names of the records in the collection, *not* the name you give the collection when you create the Component Interface.

If there are blanks in *source* rowset or record, they are copied over to the Component Interface only if the field's IsChanged property is set to True. Otherwise blanks are *not* copied.

You will generally use this method with a Component Interface to verify data from a message.

Note

CopyRowsetDelta is intended for a notification process, that is, with message data. As all notifications work only in two-tier mode, CopyRowsetDelta works only in two-tier mode.

If the rowset you're copying from is a message rowset, the CopyRowsetDelta method uses the AUDIT_ACTN field in the PSCAMA table in the message to know whether the row is to be inserted, updated, or deleted inside the Component Interface.

If the rowset you're copying from is *not* a message rowset, that rowset must have the same structure as a message, that is, it must have a PSCAMA record with an AUDIT_ACTN field on every level of the rowset.

Warning

CopyRowsetDelta uses a record's keys to locate the target row to change for all audit actions other than Add. CopyRowsetDelta actions (other than Add) therefore work only on rowsets that have keys *that uniquely identify all rows in the rowset*. Rowsets that do *not* distinguish between rows using a key field will be updated in an unpredictable fashion.

Parameters

Parameter	Description
&Rowset	Specify an existing, instantiated rowset object that contains data.

Parameter	Description
<i>InitialRow</i>	Specify the initial transaction row to begin with. This parameter provides a quick way to loop through a rowset that has multiple level zero rows. The default value for this parameter is 1.
<i>record_list</i>	Specify a list of source and target record names. All <i>source_recnames</i> are records being copied from, in the rowset object being copied from. All <i>target_recnames</i> are records being copied to, in the Component Interface being copied to.

Returns

None.

Example

The following PeopleCode would exist in your notification process. The Exit(1) causes all changes to be rolled back, and the message is marked with the status ERROR so you can correct it.

```
Local Message &MSG;
Local ApiObject &SESSION;
Local ApiObject &PO;
Local Rowset &ROWSET;

&MSG = %IntBroker.GetMessage();
&ROWSET = &MSG.GetRowset();

&SESSION = %Session;

If &SESSION <> Null Then
/* Session connected correctly */
/* Set key values to get component */
&PO = &SESSION.GetCompIntfc(COMPINTFC.PO);
&PO.BU = &MSG(&I).PO_HDR.BU.Value;
&PO.PO_ID = &MSG(&I).PO_HDR.PO_ID.Value;
&PO.Get();
&PO.CopyRowsetDelta(&ROWSET);
If NOT (&PO.Save()) Then
    Exit(1);
End-if;
Else
    /* do error processing */
End-If;
```

Considerations Using CopyRowsetDelta with Effective-Dated Rowsets

If a message data row inserted using a PSCAMA Audit action of "A" belongs to an effective dated scroll containing child scrolls, the insertion of the parent row causes child rows of the previous effective-dated row to be copied over, and their effective date is updated with that of the inserted parent.

If the message also contains a child row being inserted with a PSCAMA Audit action of "A", the component interface being populated will end up having two child rows: the one inserted as part of the Effective-dated processing and the one inserted using the PSCAMA Audit action "A" in the message.

Related Topics

- Integration Broker: PSCAMA

CopySetupRowset method: Component Interface class

Syntax

```
CopySetupRowset(&Rowset [, InitialRow] [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
RECORD.source_recname, RECORD.target_recname
```

Description

The CopySetupRowset method is used to copy a setup table application message to a Component Interface. A setup table has the same record at level zero and level one, while a Component Interface has only a single copy of a record. This method copies the contents of the message (at level zero) to the first level collection (level one) of the Component Interface.

The CopySetupRowset method copies *like-named* record fields. If a pair of source and destination record names are given, these are used to pair up the records and data collections *before* checking for like-named record fields.

Note

This method works in PeopleCode only. This method uses the names of the records in the collection, *not* the name you may give the collection when you create the Component Interface.

If there are blanks in *source* rowset or record, they are copied over to the Component Interface only if the field's IsChanged property is set to True. Otherwise blanks are *not* copied.

Note

CopySetupRowset is for a notification process, that is, with message data. As all notifications work only in two-tier mode, CopySetupRowset works only in two-tier mode.

Parameters

Parameter	Description
<i>&Rowset</i>	Specify an existing, instantiated rowset object that contains data.

Parameter	Description
<i>InitialRow</i>	Specify the initial transaction row to begin with. This parameter provides a quick way to loop through a rowset that has multiple level zero rows. The default value for this parameter is 1.
<i>record_list</i>	Specify source and target record names. The <i>source_recname</i> is the record being copied <i>from</i> , in the rowset object being copied from. The <i>target_recname</i> is the record being copied <i>to</i> , in the Component Interface being copied to.

Returns

None.

Example

The following example would be in your Notification PeopleCode.

```
Local ApiObject &SESSION;
Local ApiObject &PSMESSAGES;

Local ApiObject &CI;

Local Message &MSG;
Local Rowset &RS;

&SESSION = %Session;
&PSMESSAGES = &SESSION.psmessages;

&MSG = %IntBroker.GetMessage();
&RS = &MSG.GetRowset();

&CI = &SESSION.getcomponent(Component.VOL);

/** Set Business Component Properties */
&CI.gethistoryitems = True;
/*&CI.InteractiveMode = True;*/
/*&CI.stoponfirsterror = True;*/

For &TRANSACTION = 1 To &RS.RowCount
    &CI.VOLUNTEER_ORG = &RS(&TRANSACTION).VOLNTER_ORG_TBL.VOLUNTEER_ORG.Value;
    /* note: You can achieve better performance if you add code here to check
    if⇒
    the keys are the same L0 keys as the last time through the loop and, if
    so, skip⇒
    the Get/Create section. */

    If Not &CI.create() Then
        &PSMESSAGES.DeleteAll();
    If Not &CI.get() Then
        /** Check Error Messages */
        For &I = 1 To &PSMESSAGES.count
            &TYPE = &PSMESSAGES.item(&I).type;
```

```

        &TEXT = &PSMESSAGES.item(&I).text;
    End-For;
    Exit(1);
End-If;
End-If;
If Not &CI.CopySetupRowset(&RS, &TRANSACTION) Then
    /** Check Error Messages **/
    For &I = 1 To &PSMESSAGES.count
        &TYPE = &PSMESSAGES.item(&I).type;
        &TEXT = &PSMESSAGES.item(&I).text;
    End-For;
    Exit(1);
End-If;
If Not &CI.Save() Then
    /** Check Error Messages **/
    For &I = 1 To &PSMESSAGES.count
        &TYPE = &PSMESSAGES.item(&I).type;
        &TEXT = &PSMESSAGES.item(&I).text;
    End-For;
    Exit(1);
End-If;
&CI.Cancel();
End-For;

```

Related Topics

- [CopySetupRowsetDelta method: Component Interface class](#)
- [CopyRowset method: Component Interface class](#)

CopySetupRowsetDelta method: Component Interface class

Syntax

```
CopySetupRowsetDelta(&Rowset [, InitialRow] [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
RECORD.source_recname, RECORD.target_recname
```

Description

The CopySetupRowsetDelta method is used to copy a setup table with *changed* rows in an application message to a Component Interface. A setup table has the same record at level zero and level one, while a Component Interface has only a single copy of a record. This method copies the contents of the message (at level zero) to the first level collection (level one) of the Component Interface.

Note

This method works in PeopleCode only. CopySetupRowsetDelta copies all the like-named fields from the changed *row* into the message. It is *not* copying only the changed fields.

The CopySetupRowsetDelta method copies *like-named* record fields, in those rows where the IsChanged property is True. If a pair of source and destination record names are given, these are used to pair up the records and data collections *before* checking for like-named record fields.

 Note

This method uses the names of the records in the collection, *not* the name you may give the collection when you create the Component Interface.

If there are blanks in *source* rowset or record, they are copied over to the Component Interface only if the field's IsChanged property is set to True. Otherwise blanks are *not* copied.

 Note

CopySetupRowsetDelta is for a notification process, that is, with message data. As all notifications work only in two-tier mode, CopySetupRowsetDelta works only in two-tier mode.

 Warning

CopySetupRowsetDelta uses a record's keys to locate the target row to change for all audit actions other than Add. CopySetupRowsetDelta actions (other than Add) therefore work only on rowsets that have keys that *uniquely identify all rows in the rowset*. Rowsets that do *not* distinguish between rows using a key field will be updated in an unpredictable fashion.

Parameters

Parameter	Description
<i>&Rowset</i>	Specify an existing, instantiated rowset object that contains data.
<i>InitialRow</i>	Specify the initial transaction row to begin with. This parameter provides a quick way to loop through a rowset that has multiple level zero rows. The default value for this parameter is 1.
<i>record_list</i>	Specify source and target record names. The <i>source_rename</i> is the record being copied <i>from</i> , in the rowset object being copied from. The <i>target_rename</i> is the record being copied <i>to</i> , in the Component Interface being copied to.

Returns

None.

Example

```

Local ApiObject &SESSION;
Local ApiObject &PSMESSAGES;

Local ApiObject &CI;

Local Message &MSG;
Local Rowset &RS;

&SESSION = %Session;
&PSMESSAGES = &SESSION.psmessages;

&MSG = %IntBroker.GetMessage();
&RS = &MSG.GetRowset();

&CI = &SESSION.getcomponent(Component.VOL);

/** Set Business Component Properties **/
&CI.gethistoryitems = True;
/*&CI.InteractiveMode = True;*/
/*&CI.stoponfirsterror = True;*/

For &TRANSACTION = 1 To &RS.RowCount
    &CI.VOLUNTEER_ORG = &RS(&TRANSACTION).VOLNTER_ORG_TBL.VOLUNTEER_ORG.Value;
    /* note: You can achieve much better performance if you add code here to
    check ⇒
    if the keys are the same L0 keys as the last time through the loop and, if
    so, ⇒
    skip the Get/Create section. */

    If Not &CI.create() Then
        &PSMESSAGES.DeleteAll();
        If Not &CI.get() Then
            /** Check Error Messages **/
            For &I = 1 To &PSMESSAGES.count
                &TYPE = &PSMESSAGES.item(&I).type;
                &TEXT = &PSMESSAGES.item(&I).text;
            End-For;
            Exit(1);
        End-If;
    End-If;
    If Not &CI.CopySetupRowsetDelta(&RS, &TRANSACTION) Then
        /** Check Error Messages **/
        For &I = 1 To &PSMESSAGES.count
            &TYPE = &PSMESSAGES.item(&I).type;
            &TEXT = &PSMESSAGES.item(&I).text;
        End-For;
        Exit(1);
    End-If;
    If Not &CI.Save() Then
        /** Check Error Messages **/
        For &I = 1 To &PSMESSAGES.count
            &TYPE = &PSMESSAGES.item(&I).type;
            &TEXT = &PSMESSAGES.item(&I).text;

```

```
End-For;  
Exit(1);  
End-If;  
&CI.Cancel();
```

Related Topics

- [CopySetupRowset method: Component Interface class](#)
- [CopyRowsetDelta method: Component Interface class](#)

Create method: Component Interface class

Syntax

```
Create()
```

Description

The Create method associates the Component Interface object executing the method with a new, open Component Interface that matches the key values that were set prior to using the Create method. If there are CREATEKEYS values associated with the Component Interface, these are the values you must set. If there are no CREATEKEYS values, you must set the required GETKEYS values instead. All keys required for creating a new Component Interface must be set before using the Create method, otherwise you receive a runtime error. If you do not use unique key values, (that is, you try to set the keys to values that already exist in the database) you receive a runtime error.

Setting the key values prior to using the Create method is analogous to filling in the key values in the Add dialog for a component when you access it in add mode.

Parameters

None.

Returns

A Boolean value: True if component was successfully created, False otherwise.

Example

```
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.ACTION_REASON);  
&MYCI.ACTION = "Additional Job";  
&MYCI.ACTION_REASON = "0001";  
&MYCI.Create();
```

Find method: Component Interface class

Syntax

```
Find()
```

Description

① Note

Find can be used only at level zero within the Component Interface.

You do not have to set values for all the key values. You can use the same wildcards in your Find that you can use in the search dialog, that is, % for one or more characters in a search pattern, and _ (underscore) for exactly one character. In addition, you can use partial values. For example, the following code finds all the data items where the employee ID starts with an "8":

```
&MYCI.Emplid = "8";  
&MYDC = &MYCI.Find();
```

This is analogous to using a partial key from the search dialog, opening a component.

After you have a data collection, you can use one of the data collection methods to open the Component Interface.

Parameters

None.

Returns

A collection of Component Interfaces.

Related Topics

- [Data Collection Methods](#)

A *data collection* is the collection of data, available at runtime or during test mode, associated with a particular scroll (or record.) The data collection object returns information about every *row of data* (item) that is returned for that record at runtime.

Get method: Component Interface class

Syntax

```
Get()
```

Description

The Get method associates the Component Interface object executing the method with an open Component Interface that matches the key values that were set prior to using the Get method. The key values you must set are the required GETKEYS values for the Component Interface.

Note

To retrieve all the history data for a Component Interface, you must specify the `GetHistoryItems` property as `True` *before* you use the `Get` method. If you want any PeopleCode programs associated with the fields to fire immediately after a value is changed, you must set the `InteractiveMode` property as `True` *before* you use the `Get` method.

After any execution of `Get`, you should check if there are any errors pending on the session object. In some special circumstances (involving failure of previously cached operations failing after the `Get` has executed) `Get` returns `True` even though the component wasn't retrieved.

Parameters

None.

Returns

A Boolean value: `True` if component was successfully retrieved, `False` otherwise.

Example

```
&MYCI.EMPLID = "8001";
&MYCI.Get();
If %Session.ErrorPending Then
    /* Get Unsuccessful, do error processing */
Else
    /* do regular processing */
End-if;
```

GetPropertyByName method: Component Interface class

Syntax

```
GetPropertyByName(string)
```

Description

The `GetPropertyByName` method returns the value of the property specified by *string*. For a collection, it returns a reference to the collection. Generally this function is used only in applications that cannot get the names of the component interface properties until runtime.

Parameters

Parameter	Description
<i>string</i>	The name of the property.

Returns

String. The value of the property.

ApiObject. For a collection. The value of the property.

Example

```

Local ApiObject &oSession, &oCI;
Local array of string &Keys_Arr, &Temp_Arr, &Prop_Arr;
Local string &strCIName, &PropertyValue;
Local number &I, &J, &K;

Function getPropertyValue(&oDataColl As ApiObject, &PropertyName As string)⇒
    Returns string
    rem ***** Return property value
        Return &oDataColl.GetPropertyByName(&PropertyName);
End-Function;

Function getCollection1(&collectionName As string)
    Local ApiObject &oL1_DataColl, &oL1_DataItem;
    rem ***** Return collection
        &oL1_DataColl = &oCI.GetPropertyByName(&collectionName);
        For &J = 1 To &oL1_DataColl.Count
            &oL1_DataItem = &oL1_DataColl.Item(&J);
            For &K = 1 To &Prop_Arr.Len
                &Temp_Arr = Split(&Prop_Arr [&K], "|");
                If &Temp_Arr [1] = "1" Then
                    If &Temp_Arr [3] = "Property" Then
                        &PropertyValue = getPropertyValue(&oL1_DataItem,
                            &Temp_Arr [2]);
                    Else
                        rem ***** Code to Get Collection 2 goes here *****;
                    End-If;
                End-If;
            End-For;
        End-For;
    End-Function;

```

Related Topics

- [SetPropertyByName method: Component Interface class](#)

Save method: Component Interface class

Syntax

```
Save()
```

Description

Saves any changes that have been made to the data of the Component Interface executing the method. You must save any new Component Interfaces you create before they are added to the database.

The standard PeopleSoft save business rules (that is, any PeopleCode programs associated with SaveEdit, SavePreChange, WorkFlow, and so on.) is executed after you execute this method. If you didn't specify the Component Interface to run in interactive mode, FieldEdit, FieldChange, and so on, also run at this time.

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, you may want to delete it from the PSMessages collection.

Note

If you're running a Component Interface from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

Parameters

None.

Returns

A Boolean value: True if component was successfully saved, False otherwise.

Example

```
&MYCI.Emplid = "8001";  
&MYCI.Get();  
&MYCI.CHECKLIST_CD = "00001";  
&MYCI.Save;
```

Related Topics

- [InteractiveMode property: Component Interface class](#)
- [ErrorPending property: Session class](#)

SetPropertyByName method: Component Interface class

Syntax

```
SetPropertyByName(string, value)
```

Description

The SetPropertyByName method sets the value of the property specified by *string*. Generally this function is used only in applications that cannot set the names of the component interface properties until runtime.

Parameters

Parameter	Description
<i>string</i>	The name of the property.
<i>value</i>	The value to which the property is to be set.

Returns

None.

Example

```
Local ApiObject &oSession, &oCI;  
Local array of string &Keys_Arr, &Temp_Arr, &Prop_Arr;  
Local string &strCIName, &PropertyValue;  
Local number &I, &J, &K;  
  
&strCIName = "SDK_BUS_EXP";  
&Keys_Arr = CreateArrayRept("", 0);  
&Keys_Arr.Push("SDK_EMPLID|" | "8001");  
  
&oSession = %Session;  
&oCI = &oSession.GetCompIntfc(@"CompIntfc." | &strCIName));  
  
For &I = 1 To &Keys_Arr.Len  
    &Temp_Arr = Split(&Keys_Arr [1], "|");  
    &oCI.SetPropertyByName(&Temp_Arr [1], &Temp_Arr [2]);  
End-For;
```

Related Topics

- [GetPropertyByName method: Component Interface class](#)

Component Interface Class Properties

In this section, we discuss the Component Interface class properties. The properties are discussed in alphabetical order.

ComponentName property: Component Interface class

Description

This property returns the name of the Component Interface, as defined in Application Designer, as a string.

This property is read-only.

CreateKeyInfoCollection property: Component Interface class

Description

This property returns a `CompIntfPropInfoCollection` collection that contains a `CompIntfPropInfoCollection` object for every key in `CREATEKEYS`.

This property is read-only.

Example

```
&CREATEKEYS = &CI.CreateKeyInfoCollection;
```

Related Topics

- [Accessing the Structure of a Component Interface](#)
The structure of a Component Interface can be accessed using a `CompIntfPropInfoCollection` object. You access a `CompIntfPropInfoCollection` object from a `CompIntfPropInfoCollection` collection. There is more than one way to instantiate a `CompIntfPropInfoCollection` collection.

EditHistoryItems property: Component Interface class

Description

This property works with the `GetHistoryItems` property to specify what data is accessed, and whether you can edit that data:

- If `EditHistoryItems` is `False` (the default) and `GetHistoryItems` is `True`, you access the data in the Component Interface in a similar manner as if you were accessing a component in Update/Display All mode. This means all history rows are returned, however, you can edit only rows with a date set in the future.
- If `EditHistoryItems` is `True` and `GetHistoryItems` is `True`, you access the data in the Component Interface in a similar manner as if you were accessing a component in Correction mode. This means all history rows are returned, and you can edit them.
- If `GetHistoryItems` is `False`, you access the data in the Component Interface in a similar manner as if you were accessing a component in Update mode. The `EditHistoryItems` has no effect when `GetHistoryItems` is `False`.

You must set this property to `True` *before* you execute the `Get` method.

This property is read/write.

Related Topics

- [GetHistoryItems property: Component Interface class](#)

FindKeyInfoCollection property: Component Interface class

Description

This property returns a `CompIntfPropInfoCollection` collection that contains a `CompIntfPropInfoCollection` object for every key in `FINDKEYS`.

This property is read-only.

Related Topics

- [Accessing the Structure of a Component Interface](#)
The structure of a Component Interface can be accessed using a `CompIntfPropInfoCollection` object. You access a `CompIntfPropInfoCollection` object from a `CompIntfPropInfoCollection` collection. There is more than one way to instantiate a `CompIntfPropInfoCollection` collection.

GetDummyRows property: Component Interface class

Description

When a new scroll is inserted on a page, that scroll is displayed even though it has no underlying data. Any scroll that is empty has one dummy row displayed with only the defaults set.

This property is True if the dummy row is to be displayed, False if you do not want to display the dummy row. The default value for this property is True.

This property is read/write.

Example

```
&MyCI.GetDummyRows = False;
```

GetHistoryItems property: Component Interface class

Description

This property works with the EditHistoryItems property to specify what data is accessed, and whether you can edit that data:

- If EditHistoryItems is False (the default) and GetHistoryItems is True, you access the data in the Component Interface in a similar manner as if you were accessing a component in Update/Display All mode. This means all history rows are returned, however, you can edit only rows with a date set in the future.
- If EditHistoryItems is True and GetHistoryItems is True, you access the data in the Component Interface in a similar manner as if you were accessing a component in Correction mode. This means all history rows are returned, and you can edit them.
- If GetHistoryItems is False, you access the data in the Component Interface in a similar manner as if you were accessing a component in Update mode. The EditHistoryItems has no effect when GetHistoryItems is False.

You must set this property to True *before* you execute the Get method.

This property is read/write.

Example

The following example checks the current status of the mode, then sets the GetHistoryItems and EditHistoryItems properties to True if the mode is Correction mode.

```
If %Mode = "C" Then  
    &CI.EditHistoryItems = True;  
    &CI.GetHistoryItems = True;  
End-if;
```

Related Topics

- [EditHistoryItems property: Component Interface class](#)

GetKeyInfoCollection property: Component Interface class

Description

This property returns a `CompIntfPropInfoCollection` collection that contains a `CompIntfPropInfoCollection` object for every key in `GETKEYS`.

This property is read-only.

Related Topics

- [Accessing the Structure of a Component Interface](#)
The structure of a Component Interface can be accessed using a `CompIntfPropInfoCollection` object. You access a `CompIntfPropInfoCollection` object from a `CompIntfPropInfoCollection` collection. There is more than one way to instantiate a `CompIntfPropInfoCollection` collection.

InteractiveMode property: Component Interface class

Description

When this property is set as `True`, the Component Interface runs the same as a component: that is, any `PeopleCode` programs associated with `FieldChange`, `RowInsert`, and so on, run immediately after you make a change. If this property is set to `False`, these programs won't run until you execute the `Save` method.

This property is read/write.

Related Topics

- [ErrorPending property: Session class](#)

PropertyInfoCollection property: Component Interface class

Description

This property returns a `CompIntfPropInfoCollection` object for every property that isn't a collection (that is, a scroll.) If the property is a collection (scroll), use the `PropertyInfoCollection` property to get another collection.

This property is read-only.

Related Topics

- [Accessing the Structure of a Component Interface](#)
The structure of a Component Interface can be accessed using a `CompIntfPropInfoCollection` object. You access a `CompIntfPropInfoCollection` object from a `CompIntfPropInfoCollection` collection. There is more than one way to instantiate a `CompIntfPropInfoCollection` collection.

StopOnFirstError property: Component Interface class

Description

When this property is set as `True`, the `CopyRowset` (or `CopyRowsetDelta`) method currently executing halts its processing at the first error generated by the Component Interface.

When this property is set as True and InteractiveMode is set as False, processing of queued operations at save time is halted at the first error.

The default value is False.

This property is read/write.

Data Collection Methods

A *data collection* is the collection of data, available at runtime or during test mode, associated with a particular scroll (or record.) The data collection object returns information about every *row of data* (item) that is returned for that record at runtime.

To access a data collection, use the name of the record (scroll) as a property on a Component Interface.

Related Topics

- [Traversing a Component Interface and Using Data Collections](#)

The data in a Component Interface can be contained in a hierarchy: like the page it's built on, there may be data at level zero, level one, level two, and so on.

CurrentItem method: Data collection

Syntax

```
CurrentItem()
```

Description

If the component associated with the Component Interface is effective-dated, CurrentItem returns a reference to the current effective-dated item (row of data). To get a specific item based on a date, use GetEffectiveItem.

If there is no current item, a Null is returned.

Example

```
&MYCD = &MYCI.EMPL_CHKLIST_ITM;  
&ITEM = &MYDC.CurrentItem();
```

DeleteItem method: Data collection

Syntax

```
DeleteItem(number)
```

Description

The DeleteItem method deletes the item (row of data) at the position specified by *number*. This parameter takes a number value.

When the DeleteItem method is executed, if there are any RowDelete PeopleCode programs associated with any of the fields, they fire as well, as if the user pressed ALT+8 and ENTER or


clicked the DeleteRow icon. However, the programs are executed as if turbo mode was selected. (In turbo mode default processing is performed *only* for the row being deleted.)

If you set the InteractiveMode property to True, any RowDelete PeopleCode runs immediately after you execute DeleteItem. If this property is set to False, any RowDelete PeopleCode runs after you execute the Save method.

The deleted item is not actually deleted from the database until after you use the Save method.

Example

Here is an example of EMPL_CHK_BC in Component Interface Tester where in , suppose your Component Interface had two scrolls: EMPL_CHECKLIST and EMPL_CHKLST_ITM. The data collection EMPL_CHECKLIST has four items (rows of data.) The data collection EMPL_CHKLST_ITM (under the third item) has five items (rows of data.) If you run this component in the Component Interface Tester, it would look as follows:

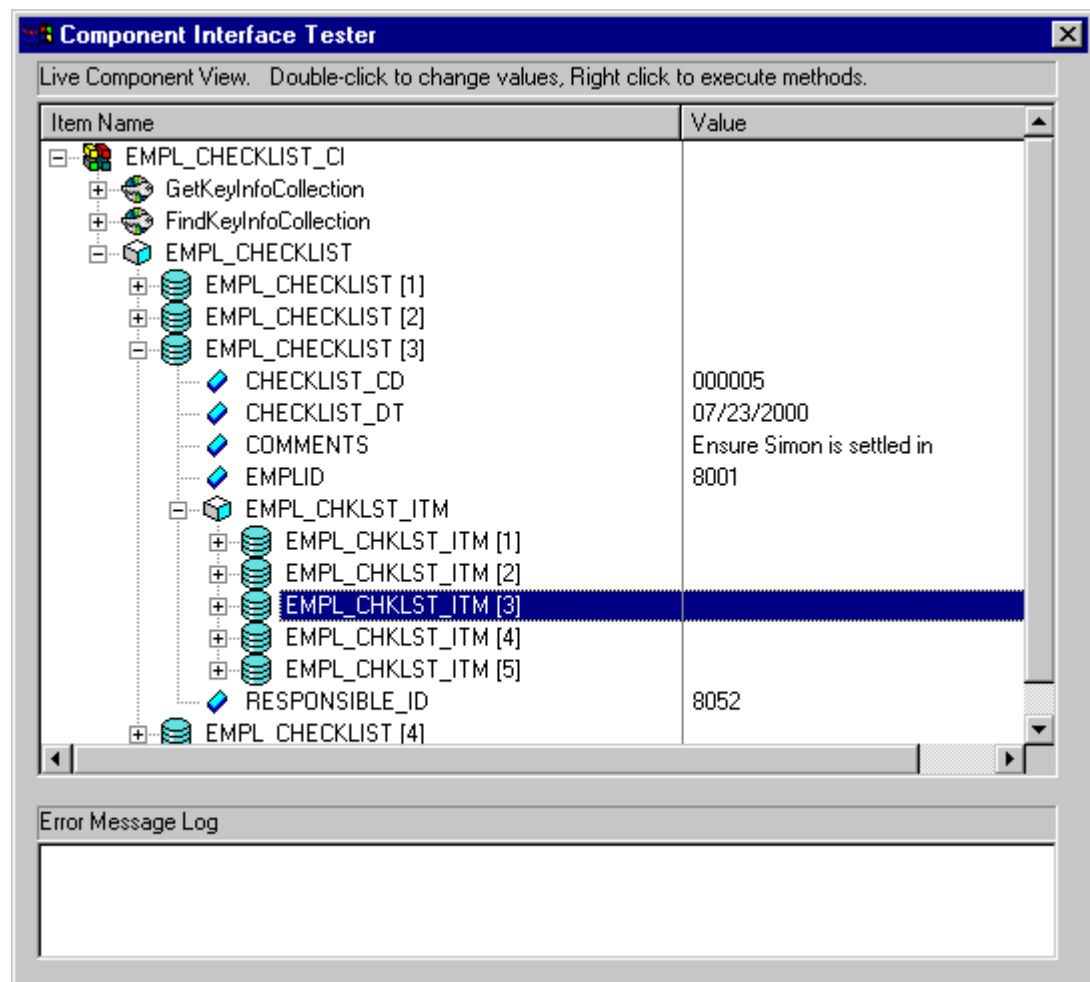

To delete the third row in the third item, use the following:

```
Local ApiObject &MYSESSION;
Local ApiObject &MYCI;

&MYSESSION = %Session;
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EMPL_CHK_BC);
```

```
&MYLVL1 = &MYCI.EMPL_CHECKLIST;  
&ITEM2 = &MYLVL1.Item(3);  
&MYLVL2 = &ITEM2.EMPL_CHKLIST_ITM;  
&MYLVL2.DeleteItem(3);  
&MYCI.Save();
```

GetEffectiveItem method: Data collection

Syntax

GetEffectiveItem(*DateString*, *SeqNo*)

Description

If the component associated with the Component Interface is effective-dated, GetEffectiveItem returns a reference to the closest effective-dated item (row of data) that is less than or equal to the date specified by the *DateString*. To get an item based on the current effective date, use CurrentItem.

Note

DateString takes only a string value. You must convert a date variable into a string before you can use it for *DateString*. You can use the String function to do this.

Parameters

Parameter	Description
<i>DateString</i>	Specify the year, month, and day of the effective date that you want to look for. This parameter takes a string value. You can specify the date either as YYYY-MM-DD or MM/DD/YY.
<i>SeqNo</i>	Specify the sequence number of the effective date that you want to look for. This parameter takes a number value.

Returns

A reference to an effective-dated item.

Example

```
&MYCD = &MYCI.EMPL_CHKLIST_ITM;  
&DSTRING = String(&MYDATE);  
&ITEM = &MYDC.GetEffectiveItem(&DSTRING, 1);
```

Related Topics

- PeopleCode Language Reference: String function

GetEffectiveItemNum method: Data collection

Syntax

```
GetEffectiveItemNum(DateString, SeqNo)
```

Description

If the component associated with the Component Interface is effective-dated, GetEffectiveItemNum returns a reference to the number of the closest effective-dated item (row of data) that is less than or equal to the date specified by the *DateString*. To get an item number based on the current effective date, use CurrentItemNum.

Note

DateString takes only a string value. You must convert a date variable into a string before you can use it for *DateString*. You can use the String function to do this.

Parameters

Parameter	Description
<i>DateString</i>	Specify the year, month, and day of the effective date that you want to look for. This parameter takes a string value. You can specify the date either as YYYY-MM-DD or MM/DD/YYYY.
<i>SeqNo</i>	Specify the sequence number of the effective date that you want to look for. This parameter takes a number value.

Returns

A number. This method returns 0 if no row matching the criteria is found.

Example

```
&MYCD = &MYCI.EMPL_CHKLIST_ITM;  
&DSTRING = String(&MYDATE);  
&ITEMNUM = &MYDC.GetEffectiveItemNum(&DSTRING, 1);
```

Considerations for Returning Rows

GetEffectiveItemNum returns a valid row number only when EFFDT is less than or equal to *DateString*. If the value you use for *DateString* pre-dates all the rows in the data collection, this method returns a zero and logs a message in the PSMessages collection.

For example, if 12/01/1990 was the earliest date in the collection, the following would return zero:

```
&NUM = &MYDC.GetEffectiveItemNum("01/01/1900", 1);
```

Related Topics

- PeopleCode Language Reference: String function

InsertItem method: Data collection

Syntax

InsertItem(*number*)

Description

The InsertItem method inserts the item (row of data) at the position specified by *number*. This parameter takes a number value. You can insert items below only the zero level scroll. If you need to add a new data item, use the Create method instead.

InsertItem adds the new row *after* the current row. If the row has an effective date (EFFDT) or an effective sequence (EFFSEQ), these values are copied into the new row.

If a collection has *n* items and you specify *n* as the value for *number*, InsertItem inserts a new item (row) after the *last row*.

The InsertItem method returns a reference to the newly created item (row of data).

When the InsertItem method is executed, if there are any RowInsert PeopleCode programs associated with any of the fields, they fire also, as if the user pressed **ALT+7** and **ENTER** or clicked the InsertRow icon. However, the programs are executed as if turbo mode was selected. (In turbo mode default processing is performed *only* for the row being inserted.)

If you set the InteractiveMode property to True, any RowInsert PeopleCode runs immediately after you execute InsertItem. If this property is set to False, any RowInsert PeopleCode runs after you execute the Save method.

The inserted item is not added to the database until after you use the Save method.

Example

In the following example a new item (row of data) is added at the *end* of the current collection.

```
&MYDC = &MYCI.EMPL_CHECKLIST;  
&COUNT = &MYDC.Count;  
&ITEM = &MYDC.InsertItem(&COUNT);  
&ITEM.CHECKLIST_CD = "00001";  
&ITEM.RESPONSIBLE_ID = "6609";  
&RSLT = &MYCI.Save();
```

Item method: Data collection

Syntax

Item(*number*)

Description

The Item returns the item (row of data) that exists at the *number* position in the data collection executing the method. The parameter takes a number value.

ItemByKeys method: Data collection

Syntax

`ItemByKeys(­key_values)`

Description

The `ItemByKeys` method returns the item specified by the parameters. The number and type of keys are unique to each specific collection. Each key must be separated by a comma.

The collection reference must be the name of the Component Interface, followed by the record name. This method won't work on a collection reference (that is, `&CI.RECNAME.ItemByKeys`, not `&MYCOLLECTION.ItemByKeys`).

After you've returned an item, use the `ItemNum` property to determine the number of the item.

The keys must be in the *exact* order as in the Component Interface. A second level data collection also contains the keys of the parent data collection.

An easy way to determine the keys and their order in PeopleCode is to open the Component Interface in Application Designer, and use the Test Component. To determine the keys in Visual Basic, use the Object Browser.

See [ItemNum property: Data Item class](#).

To see the signature for `ItemByKeys`:

1. Open the Component Interface in Application Designer.
2. Start the Component Interface Tester.
Select the open Component Interface, then right-click, and select Test Component Interface from the pop-up menu.
3. Instantiate an object.
Add data to the Get or Create keys and click Get Existing or Create New, respectively.
4. Expand the instantiated component until you find the collection in which you're interested.
5. Right-click on the collection and select `ItemByKeys` from the resulting pop-up menu.
6. The dialog that follows shows you the specific parameters, types, and order in which you should call `ItemByKeys`.

Returns

An item (row) of data from a data collection.

Example

```
Local ApiObject &MYSESSION;  
Local ApiObject &CI;  
Local ApiObject &CI_COLLECTION;  
Local ApiObject &CI_ITEM;  
  
&MYSESSION = %Session;  
&CI = &MYSESSION.GetCompIntfc(COMPINTFC.CM_EVAL);  
&CI.EMPLID = "8001";
```



```
If &CI.Get() <> 1 Then
    Exit;
End-If;

&CI_COLLECTION = &CI.CM_EVALUATIONS;
&COUNT = &CI_COLLECTION.Count;

&CI_ITEM = &CI.CM_EVALUATIONS.itembykeys("01");
&CI_ITEM.DESCR50 = "TEST";
If &CI.Save() <> 1 Then
    Exit;
End-If;
```

Related Topics

- [Component Interfaces: Testing Component Interfaces](#)

Data Collection Properties

This section provides an overview of the Data Collection properties.

Count property: Data collection

Description

This property returns the number of data items (rows of data) in the data collection.

This property is read-only.

Example

```
&CI = &MYSESSION.GetCompIntfc(COMPINTFC.CM_EVAL_BC);
&CI.EMPLID = "8001";
&CI.Get()

&CI_COLLECTION = &CI.CM_EVALUATIONS;
&COUNT = &CI_COLLECTION.Count;
```

CurrentItemNumber property: Data collection

Description

If the component associated with the Component Interface is effective-dated, this property returns the item number for the current effective-dated item (row of data).

This property is read-only.

Data Item Class Property

This section discusses the ItemNum property.

ItemNum property: Data Item class

Description

This property returns the number of the data item (row) in the collection. For example, many of the data collection methods takes a number as a parameter. Use this property to determine the item number (row number) of an item in a collection, then use that number in another method.

This property is read-only.

Example

Evaluate USER_ACTION

. . .

When = "D"

 &CI_ITEM = &CI_LVL1_NAMES.ItemByKey(&NAME_TYPE, &NAME_PART);

 If &CI_ITEM <> Null then

 &I = &CI_LVL1_NAMES.ItemNum;

 &CI_LVL1_NAMES.DeleteItem(&I);

 End-if;

. . .

End-Evaluate;

Accessing the Structure of a Component Interface

The structure of a Component Interface can be accessed using a `ComplntfPropInfoCollection` object. You access a `ComplntfPropInfoCollection` object from a `ComplntfPropInfoCollection` collection. There is more than one way to instantiate a `ComplntfPropInfoCollection` collection.

Note

You don't have to populate a Component Interface with data before you access the structure. You can access the structure of a Component Interface immediately after you use the `GetComplntfc` method with a session object. Accessing the structure of a Component Interface before you populate it with data may increase your performance.

See [GetComplntfc method: Session class](#).

ComplntfPropInfoCollection Collection

There are two types of `ComplntfPropInfoCollection` object properties: *field* properties and *collection* properties.

A *field* property maps to a specific record field. You can access structural information about the field using a `ComplntfPropInfoCollection` object. This information includes the name of the field, whether it's required, is it based on a prompt table, and so on.

A *collection* property is just that, a collection of properties. And before you can access a `CompIntfPropInfoCollection` object, you must first get a `CompIntfPropInfoCollection` *collection*. The following are the valid types of `CompIntfPropInfoCollection` collections:

- CREATEKEYS, GETKEYS and FINDKEYS

When you create a component, you must specify the search record to be used with that component. You can also specify an alternate search record to be used when the component is accessed in Add mode. The key fields from those records make up the GETKEYS, FINDKEYS, and CREATEKEYS collections.

Note


In order for a component interface to validate a key against a prompt table, both the Search Edit and List Box Item options must be selected in the record field properties for the key.

- CREATEKEYS: A collection containing the key fields of the search record specified to be used in Add mode. Use the `CreateKeyInfoCollection` property to instantiate the `CompIntfPropInfoCollection` collection.
- GETKEYS: A collection containing the primary required key fields from the primary search record. Use the `GetKeyInfoCollection` property to instantiate the `CompIntfPropInfoCollection` collection.
- FINDKEYS: A collection containing the key fields and the alternate key fields from the primary search record. Use the `FindKeyInfoCollection` property to instantiate the `CompIntfPropInfoCollection` collection.
- A page scroll
The fields associated with a page scroll are in this type of collection. This may or may not be all the fields associated with the record. Use the `PropertyInfoCollection` property to instantiate this kind of collection.

If the page the Component Interface is based on contains a secondary scroll, you can check the `Type` property to determine if the object is a `CompIntfPropInfoCollection` object (that is, a field), or a scroll. Then, to get the properties of the fields associated with that secondary scroll, you can use the `PropertyInfoCollection` property on the `CompIntfPropInfoCollection` object.

For example, the following Component Interface has a level zero and level one scroll.

This example illustrates the fields and controls on the Component Interface with secondary scroll. You can find definitions for the fields and controls later on this page.

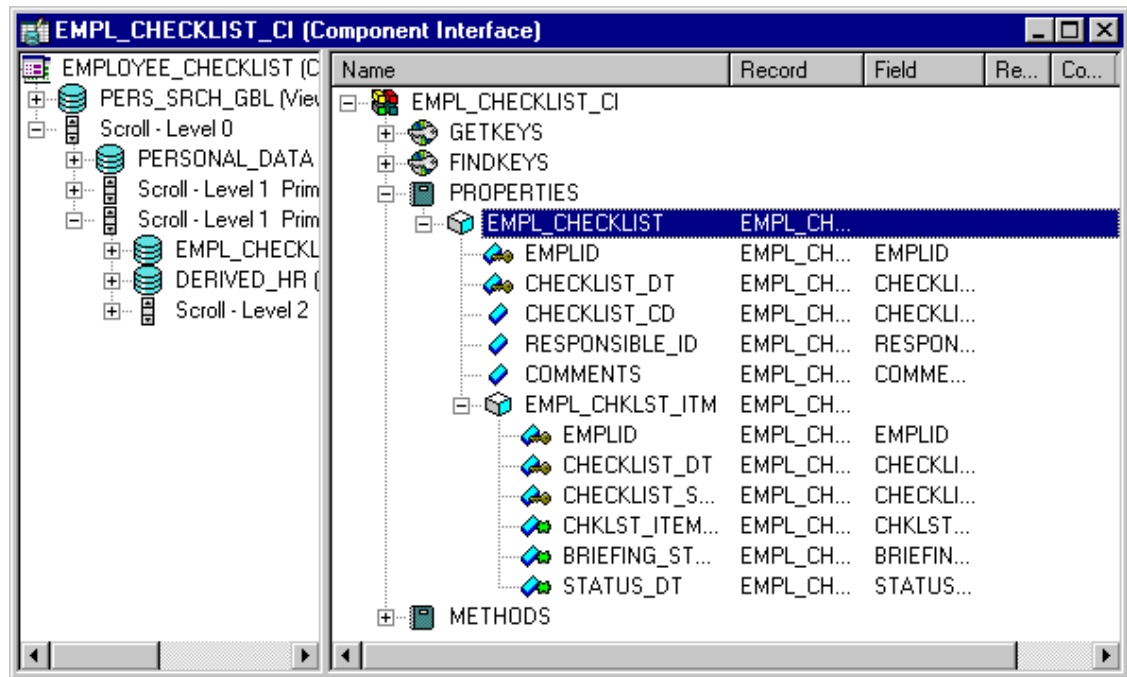

The level zero scroll is made up of three fields: CHECKLIST_CD, RESPONSIBLE_ID, COMMENTS, and a level one scroll, EMPL_CHKLIST_ITM. The `CompIntfPropInfoCollection` collection for this Component Interface would have four items in it. Three would be `CompIntfPropInfoCollection` objects (the three fields.) The last item, EMPL_CHKLIST_ITM would *not* be a valid `CompIntfPropInfoCollection` object. You can use the `IsCollection` property to verify if an item in a collection is itself a collection or a valid `CompIntfPropInfoCollection` object.

To access the fields in a lower level scroll, you must use the `PropertyInfoCollection` property first, to return a collection of those fields.

The following example loops through a Component Interface. It pulls out the names of the properties in the first three levels of a Component Interface. If the property is a nested collection, it prefixes the ancestor collection name to the property name.

```
&MYSESSION = %Session;
&CI = &MYSESSION.GetCompIntfc(COMPINTFC.VOLNEW);
&PROPINFO_0 = &CI.PropertyInfoCollection;
For &I = 1 To &PROPINFO_0.Count;
    &PROPIITEM_0 = &PROPINFO_0.Item(&I);
    Warning (&PROPIITEM_0.Name);
    If (&PROPIITEM_0.IsCollection) Then
        &PROPINFO_1 = &PROPIITEM_0.PropertyInfoCollection;
        For &J = 1 To &PROPINFO_1.Count;
            &PROPIITEM_1 = &PROPINFO_1.Item(&J);
            &S1 = &PROPIITEM_0.Name | "." | &PROPIITEM_1.Name;
            Warning (&S1);
            If (&PROPIITEM_1.IsCollection) Then
                &PROPINFO_2 = &PROPIITEM_1.PropertyInfoCollection;
                For &K = 1 To &PROPINFO_2.Count;
                    &PROPIITEM_2 = &PROPINFO_2.Item(&K);
                    &S1 = &PROPIITEM_0.Name | "." | &PROPIITEM_1.Name | "." | =>
&PROPIITEM_2.Name;
```

```
                Warning (&S1);
            End-For;
        End-If
    End-For;
End-If;
End-For;
```

ComplntfPropInfoCollection Collection Methods

This section explains the ComplntfPropInfoCollection collection methods.

First method: ComplntfPropInfoCollection collection

Syntax

```
First()
```

Description

The First method returns the first ComplntfPropInfoCollection object in the ComplntfPropInfoCollection collection object executing the method.

Example

```
&CIINFO = &CIPROPCOLL.First();
```

Item method: ComplntfPropInfoCollection collection

Syntax

```
Item(number)
```

Description

The Item method returns a ComplntfPropInfoCollection object that exists at the *number* position in the ComplntfPropInfoCollection collection executing the method

If the specified item is *itself* a collection, the ComplntfPropInfoCollection object that gets returned is invalid (set to NULL). You can use the PropertyInfoCollection property to return a collection of ComplntfPropInfoCollection objects for the collection.

Example

```
&SCROLL1 = &MYCI.PropertyInfoCollection;
For &I = 1 to &SCROLL1.Count;
&PROPERTY = &SCROLL1.Item(&I);
If &PROPERTY.IsCollection Then
&SCROLL2 = &PROPERTY.PropertyInfoCollection;
/*do scroll 2 processing */
Else
/* do scroll 1 processing */
```

```
End-If;  
End-For;
```

Next method: ComplntfPropInfoCollection collection

Syntax

```
Next()
```

Description

The Next method returns the next ComplntfPropInfoCollection object in the ComplntfPropInfoCollection collection object executing the method. You can use this method only after you have used either the First or Item methods: otherwise the system doesn't know where to start.

ComplntfPropInfoCollection Collection Properties

This section explains the Count property.

Count property: ComplntfPropInfoCollection collection

Description

This property returns the number of ComplntfPropInfoCollection objects in the ComplntfPropInfoCollection collection object executing the method.

This property is read-only.

Example

```
&COUNT = &MYCIPROPINFOC.Count;
```

ComplntfPropInfoCollection Object Properties

This section explains the ComplntfPropInfoCollection Object properties.

Format property: ComplntfPropInfoCollection Object class

Description

This property returns the field format for the object executing the property (that is, name, phone, zip, SSN, and so on) as a number. The values are:

Value	Description
0	No Format
1	Name
2	Phone
3	Zip

Value	Description
4	SSN
5	Routine
6	Mixed Case
7	Raw Binary
8	Number only
9	SIN
10	Phone International
11	Zip International
12	Seconds
13	Microseconds
14	Custom

This property is read-only.

IsCollection property: ComplIntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is a data collection, False otherwise. If IsCollection is True, other field-oriented properties like Required, Type, Xlat, YesNo, Prompt and Format are undefined. If IsCollection is False, the object represents a field and all the previous properties are defined as described.

This property is read-only.

IsReadOnly property: ComplIntfPropInfoCollection Object class

Description

This property returns True if the property marked Read Only in the Component Interface Definition; False otherwise.

This property is read-only.

Key property: ComplIntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is a key, False otherwise.

This property is read-only.

LabelLong property: ComplIntfPropInfoCollection Object class

Description

This property returns the record field LongName value as a string. If there is a component override for this value, it is *not* included.

This property is read-only.

LabelShort property: ComplntfPropInfoCollection Object class

Description

This property returns the record field ShortName value as a string. If there is a component override for this value, it is *not* included.

This property is read-only.

Length property: ComplntfPropInfoCollection Object class

Description

This property returns the length of the field property as a number. If the property is a collection, this property returns a zero.

The length of the field is calculated by converting it to a string then getting the length of the string. This means that *everything* in the field is counted as a character, including spaces, date time separation characters, decimal points, sign indicators, and so on.

For example, the following string has 10 characters:

01/01/2001

The following string has five characters:

10.10

The following string has six characters:

-10.10

This property is read-only.

Name property: ComplntfPropInfoCollection Object class

Description

This property returns the name of the object executing the property as a string.

This property is read-only.

Prompt property: ComplntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is associated with a prompt table, False otherwise.

This property is read-only.

PropertyInfoCollection property: ComplntfPropInfoCollection Object class

Description

This property returns another ComplntfPropInfoCollection collection if the object executing the property is a collection.

This property is read-only.

Example

```
&SCROLL1 = &MYCI.PropertyInfoCollection;  
For &I = 1 to &SCROLL1.Count;  
    &PROPERTY = &SCROLL1.Item(&I);  
    If &PROPERTY.IsCollection Then  
        &SCROLL2 = &PROPERTY.PropertyInfoCollection;  
        /*do scroll 2 processing */  
    Else  
        /* do scroll 1 processing */  
    End-If;  
End-For;
```

Required property: ComplntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is a required property, False otherwise.

This property is read-only.

Type property: ComplntfPropInfoCollection Object class

Description

This property returns the field type, as a number, of the object. The values are:

Value	Description
0	Character
1	Long Character
2	Number
3	Signed Number
4	Date
5	Time
6	DateTime
7	SubRecord (Not supported with Component Interfaces)
8	Image (Limited support with Component Interfaces)

Value	Description
9	ImageReference (Not supported with Component Interfaces)

This property is read-only.

Xlat property: ComplIntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is associated with an XLAT table, False otherwise.

This property is read-only.

YesNo property: ComplIntfPropInfoCollection Object class

Description

This property returns True if the object executing the property is associated with the Yes/No table, False otherwise.

This property is read-only.

Component Interface Examples

The following are examples of some of the most usual actions you're likely to perform using a Component Interface.

Create a New Instance of Data Example

The following is an example of how to create a new instance of a Component Interface.

To create a new instance of data:

In this example, you are creating a new instance of data for the EXPRESS Component Interface, which is based on the EXPRESS_ISSUE_INV component. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MYSESSION;  
Local ApiObject &MYCI;  
&MYSESSION = %Session;  
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EXPRESS);  
&MYCI.BUSINESS_UNIT = "H01B";  
&MYCI.INTERNAL_FLG = "Y";  
&MYCI.ORDER_NO = "NEXT";  
&MYCI.Create();  
&MYCI.CUSTOMER = "John's Chicken Shack";  
&MYCI.LOCATION = "H10B6987";  
.  
.  
.  
If NOT(&MYCI.Save()) Then
```

```

/* save didn't complete */
&COLL = &MYSESSION.PSMessages;
For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
    &TEXT = &ERROR.Text;
    /* do error processing */
End-For;
&COLL.DeleteAll();
End-if;

```

1. Get a session object.

Before you can get a Component Interface, you have to get a session object. The session controls access to the Component Interface, provides error tracing, enables you to set the runtime environment, and so on.

```
&MYSESSION = %Session;
```

2. Get a Component Interface.

Use the `GetCompIntfc` method with a session object to get the Component Interface. You must specify a Component Interface definition that has already been created. You receive a runtime error if you specify a Component Interface that doesn't exist.

```
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EXPRESS);
```

After you execute the `GetCompIntfc` method, you have only the *structure* of the Component Interface. You haven't populated the Component Interface with data yet.

3. Set the CREATEKEYS.

These key values are required to open a new instance of the data. If the values you specify aren't unique, that is, if an instance of the data already exists in the database with those key values, you receive a runtime error.

```

&MYCI.BUSINESS_UNIT = "H01B";
&MYCI.INTERNAL_FLG = "Y";
&MYCI.ORDER_NO = "NEXT";

```

4. Create the instance of data for the Component Interface.

After you set the key values, you must use the `Create` method to populate the Component Interface with the key values you set.

```
&MYCI.Create();
```

This creates an instance of this data. However, it hasn't been saved to the database. You must use the `Save` method before the instance of data is committed to the database.

5. Set the rest of the fields.

Assign values to the other fields.

```

&MYCI.CUSTOMER = "John's Chicken Shack";
&MYCI.LOCATION = "H10B6987";

```

.

.

If you have specified `InteractiveMode` as `True`, every time you assign a value or use the `InsertItem` or `DeleteItem` methods, any PeopleCode programs associated with that field (either with record field or the component record field) fires (`FieldEdit`, `FieldChange`, `RowInsert`, and so on.)

6. Save the data.

When you execute the `Save` method, the new instance of the data is saved to the database.

```
If NOT(&MYCI.Save()) Then
```

The `Save` method returns a Boolean value: `True` if the save was successful, `False` otherwise. You can use this value to do error checking.

The standard PeopleSoft save business rules (that is, any PeopleCode programs associated with `SaveEdit`, `SavePreChange`, `WorkFlow`, and so on.) are executed. If you didn't specify the Component Interface to run in interactive mode, `FieldEdit`, `FieldChange`, and so on, also run at this time for all fields that had values set.

Note

If you're running a Component Interface from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a `COMMIT`.

7. Check Errors.

You can check if there were any errors using the `PSMessages` property on the session object.

```
If NOT(&MYCI.Save()) Then
  /* save didn't complete */
  &COLL = &MYSESSION.PSMessages;
  For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
    &TEXT = &ERROR.Text;
    /* do error processing */
  End-For;
  &COLL.DeleteAll();
End-if;
```

If there are multiple errors, all errors are logged to the `PSMessages` collection, not just the first occurrence of an error. As you correct each error, delete it from the `PSMessages` collection.

The Text property of the PSMessages returns the text of the error message. At the end of this text is a contextual string that contains the name of the field that generated the error. The contextual string has the following syntax:

```
{BusinessComponentName.[CollectionName(Row).[CollectionName(Row).
[CollectionName⇒
(Row)]]].PropertyName}
```

For example, if you specified the incorrect format for a date field of the Component Interface named ABS_HIST, the Text property would contain the following string:

```
Invalid Date {ABS_HIST.BEGIN_DT} (90), (1)
```

The contextual string (by itself) is available using the Source property of the PSMessages.

Note

If you've called your Component Interface from an Application Engine program, all errors are also logged in the Application Engine error log tables.

See [Error Handling](#), [Source property: PSMessages class](#).

Getting an Existing Instance of Data Example

The following is an example of how to get an existing instance of a Component Interface.

In this example, you are getting an existing instance of data for the EMPL_CHKLIST_BC Component Interface, which is based on the EMPLOYEE_CHECKLIST component. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MYSESSION;
Local ApiObject &MYCI;

&MYSESSION = %Session;
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EMPL_CHKLIST_BC);
&MYCI.EMPLID= "8001";
&MYCI.Get();

/* Get checklist Code */

&CHECKLIST_CD = &MYCI.CHECKLIST_CD;

/* Set Effective date */

&MYCI.EFFDT = "05-01-1990";
.
.
.
If NOT(&MYCI.Save()) Then
/* save didn't complete */
&COLL = &MYSESSION.PSMessages;
For &I = 1 to &COLL.Count
```

```

        &ERROR = &COLL.Item(&I);
        &TEXT = &ERROR.Text;
        /* do error processing */
    End-For;
    &COLL.DeleteAll();
End-if;

```

1. Get a session object.

Before you can get a Component Interface, you have to get a session object. The session controls access to the Component Interface, provides error tracing, enables you to set the runtime environment, and so on.

```
&MYSESSION = %Session;
```

2. Get a Component Interface.

Use the `GetCompIntfc` method with a session object to get the Component Interface. You must specify a Component Interface definition that has already been created. You receive a runtime error if you specify a Component Interface that doesn't exist.

```
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EMPL_CHKLIST_BC);
```

After you execute the `GetCompIntfc` method, you have only the *structure* of the Component Interface. You haven't populated the Component Interface with data yet.

3. Set the GETKEYS.

These are the key values required to return a unique instance of existing data. If the keys you specify allow for more than one instance of the data to be returned, or if no instance of the data matching the key values is found, you receive a runtime error.

```
&MYCI.EMPLID = "8001";
```

4. Get the instance of data for the Component Interface.

After you set the key values, you have to use the `Get` method.

```
&MYCI.Get();
```

This populates the Component Interface with data, based on the key values you set.

5. Get field values or set field values.

At this point, you can either get values or set values.

```
&CHECKLIST_CD = &MYCI.CHECKLIST_CD;
```

```
/* OR */
&MYCI.EFFDT = "05-01-1990";
```

If you have specified `InteractiveMode` as `True`, every time you assign a value, any PeopleCode programs associated with that field (either with record field or the component record field) fires (`FieldEdit`, `FieldChange`, and so on.)

6. Save or Cancel the Component Interface, as appropriate.

If you've changed values and you want to save your changes to the database, you must use the Save method.

```
If NOT(&MYCI.Save()) Then
```

The Save method returns a Boolean value: True if the save was successful, False otherwise. Use this value to do error checking.

The standard PeopleSoft save business rules (that is, any PeopleCode programs associated with SaveEdit, SavePreChange, WorkFlow, and so on.) are executed. If you didn't specify the Component Interface to run in interactive mode, FieldEdit, FieldChange, and so on, also run at this time.

Note

If you're running a Component Interface from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

If you don't want to save any changes to the data, use the Cancel method. The Component Interface is reset to the state it was in just after you used the GetComplntfc method.

```
&MYCI.Cancel();
```

This is similar to a user pressing ESC while in a component, and choosing to not save any of their changes.

7. Check Errors.

You can check if there were any errors using the PSMessages property on the session object.

```
If NOT(&MYCI.Save()) Then
  /* save didn't complete */
  &COLL = &MYSESSION.PSMessages;
  For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
    &TEXT = &ERROR.Text;
    /* do error processing */
  End-For;
  &COLL.DeleteAll();
End-if;
```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, delete it from the PSMessages collection.

The Text property of the PSMMessage returns the text of the error message. At the end of this text is a contextual string that contains the name of the field that generated the error. The contextual string has the following syntax:

```
{ComponentInterfaceName.[CollectionName(Row).[CollectionName(Row).
[CollectionName⇒
(Row)]]].PropertyName}
```

For example, if you specified the incorrect format for a date field of the Component Interface named ABS_HIST, the Text property would contain the following string:

```
Invalid Date {ABS_HIST.BEGIN_DT} (90), (1)
```

The contextual string (by itself) is available using the Source property of the PSMMessage.

Note

If you've called your Component Interface from an Application Engine program, all errors are also logged in the Application Engine error log tables.

See [Error Handling](#), [Source property: PSMMessage class](#).

Retrieving a List of Instance of Data Example

The following is an example of how to retrieve a list of instances of data.

To retrieve a list of instances of data:

In this example, you are getting a list of existing instances of data for the EMPL_CHKLIST_CI Component Interface, which is based on the EMPLOYEE_CHECKLIST component. The following is the complete code sample: the steps break it up and explain each line.

```
Local ApiObject &MYSESSION;
Local ApiObject &MYCI;
Local ApiObject &MYNEWCI;
&MYSESSION = %Session;
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EMPL_CHKLIST_CI);
&MYCI.EMPLID= "8";
&MYCI.LAST_NAME_SRCH = "S";
&MYLIST = &MYCI.Find();
For &I = 1 to &MYLIST.Count;

    /* note: do not reuse the CI used to create the list, or the list will be⇒
    destroyed */

    &MYNEWCI = &MYLIST.Item(&I);

    /* CI from list still must be instantiated to use it */

    &MYNEWCI.Get();

    /* do some processing */
```


End-For;

1. Get a session object.

Before you can get a Component Interface, you have to get a session object. The session controls access to the Component Interface, provides error tracing, enables you to set the runtime environment, and so on.

```
&MYSESSION = %Session;
```

2. Get a Component Interface.

Use the GetCompIntfc method with a session object to get the Component Interface. You must specify a Component Interface definition that has already been created. You receive a runtime error if you specify a Component Interface that doesn't exist.

```
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.EMPL_CHKLIST_CI);
```

After you execute the GetCompIntfc method, you have only the *structure* of the Component Interface. You haven't populated the Component Interface with data yet.

3. Set the FINDKEYS values.

These can be alternate key values or partial key values. If no instance of the data matching the key values is found, you receive a runtime error.

```
&MYCI.EMPLID = "8";  
&MYCI.LAST_NAME_SRCH = "S";
```

4. Get a list of data instances for the Component Interface.

After you set the alternate or partial key values, use the Find method to return a list of data instances for the Component Interface.

```
&MYLIST = &MYCI.Find();
```

Note

The Find method can be executed only at level zero in a Component Interface.

5. Select an instance of the data.

To select an instance of the data, you can use any of the following standard data collection methods:

- First
- Item
- Next

For example, you could loop through every instance of the data to do some processing:

```
For &I = 1 to &MYLIST.Count;  
  /* note: do not reuse the Component Interface used to */  
  /* create the list here, or the list will be destroyed */
```

```

&MYNEWCI = &MYLIST.Item(&I);
/* CI from list must still be instantiated to use it */
&MYNEWCI.Get();
/* do some processing */
End-For;

```

After you have a specific instance of the data, you can get values, set values, and so on.


See [Data Collection Methods](#).

Inserting Effective-Dated Data Example

You can rename a collection in a Component Interface. For example, suppose you had the same record at level zero and at level one. You may want to rename the level one data collection to reflect this. The data in a data collection is associated with the primary database record of a scroll, *not* with the name you supply.

Here is an example of using a Component Interface that has the same record at level zero and level one. The Component Interface is based on the CURRENCY_CD_TBL component.

This example illustrates the fields and controls on the Example of CI with same record at level zero and level one. You can find definitions for the fields and controls later on this page.

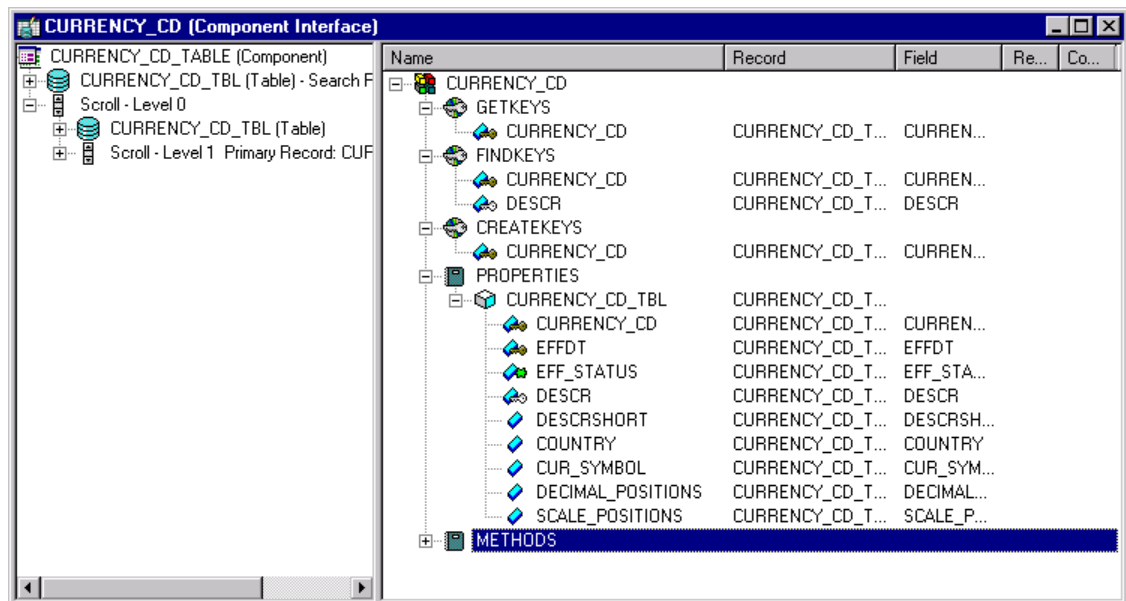

The following code example is based on this Component Interface and does the following:

1. Gets an existing Component Interface.
2. Finds the current effective-dated item index.
3. Inserts a new row before the current effective-dated item using the InsertItem method.

```

Local ApiObject &Session;
Local ApiObject &CURRENCY_CD;
Local ApiObject &CURRENCY_CD_TBLCol;
Local ApiObject &CURRENCY_CD_TBLItm;
Local ApiObject &PSMessages;

```

```

Local string &ErrorText, &ErrorType;
Local number &ErrorCount;
Local Boolean &Error;

Function CheckErrorCodes()

    &PSMessages = &Session.PSMessages;
    &ErrorCount = &PSMessages.Count;
    For &i = 1 To &ErrorCount
        &ErrorText = &PSMessages.Item(&i).Text;
        &ErrorType = &PSMessages.Item(&i).Type;
    End-For;

End-Function;

/* Initialize Flags */
&Error = False;

&Session = %Session;

If &Session <> Null Then

    CheckErrorCodes();
    /* Application Specific Error Processing */

Else

    &CURRENCY_CD = &Session.GetCompIntfc(CompIntfc.CURRENCY_CD);

    If &CURRENCY_CD = Null Then

        CheckErrorCodes();
        /* Application Specific Error Processing */

    Else

        /* Set Component Interface Get Keys */
        &CURRENCY_CD.CURRENCY_CD = "USD";

        If Not &CURRENCY_CD.Get() Then

            CheckErrorCodes();
            /* Application Specific Error Processing */
            &Error = True;

        End-If;

        If Not &Error Then

            &CURRENCY_CD_TBLCol = &CURRENCY_CD.CURRENCY_CD_TBL;
            &CURRENCY_CD_TBLItm =
&CURRENCY_CD_TBLCol.InsertItem(&CURRENCY_CD_⇒
TBLCol.CurrentItemNum());
            &CURRENCY_CD_TBLItm.EFFDT = %Date;
            &CURRENCY_CD_TBLItm.EFF_STATUS = "A";
            &CURRENCY_CD_TBLItm.DESCR = "NewCurrencyCode";

```

```

        &CURRENCY_CD_TBLItm.DESCRSHORT = "New";
        &CURRENCY_CD_TBLItm.COUNTRY = "USA";
        &CURRENCY_CD_TBLItm.CUR_SYMBOL = "?";
        &CURRENCY_CD_TBLItm.DECIMAL_POSITIONS = 4;
        &CURRENCY_CD_TBLItm.SCALE_POSITIONS = 0;

        /* Save Instance of Component Interface */
        If Not &CURRENCY_CD.Save() Then

            CheckErrorCodes();
            /* Application Specific Error Processing */

        End-If;

    End-If;

    /* End: Set Component Interface Properties */

    /* Cancel Instance of Component Interface */
    &CURRENCY_CD.Cancel();

End-If;

End-If;

```

Inserting Effective-Dated Data Example Using Visual Basic

Here's a code example in Visual Basic that does the same thing as the previous code example.

```

Private Sub CURRENCY_CD()

    On Error GoTo eMessage

    '***** Set Object References *****
    Dim oCISession As Object
    Dim oCURRENCY_CD As Object
    Dim oCURRENCY_CD_TBL As Object
    Dim oCURRENCY_CD_TBLItem As Object

    '***** Set Connect Parameters *****
    strAppSeverPath = "//PSOFT101999:9000"
    strOperatorID = "PTDM0"
    strPassword = "PTDM0"

    '***** Create PeopleSoft Session Object *****
    Set oCISession = CreateObject("PeopleSoft.Session")

    '***** Connect to the App Sever *****
    oCISession.Connect 1, strAppSeverPath, strOperatorID, strPassword, 0

    '***** Get the Component *****
    Set oCURRENCY_CD = oCISession.GetCompIntfc("CURRENCY_CD")

    '***** Set the Component Interface Mode *****
    oCURRENCY_CD.InteractiveMode = False

```

```

oCURRENCY_CD.GetHistoryItems = True

'***** Set Component Get/Create Keys *****
oCURRENCY_CD.CURRENCY_CD = "USD"

'***** Execute Create *****
oCURRENCY_CD.Get

'Set CURRENCY_CD_TBL Collection Field Properties --
'Parent: PS_ROOT Collection
Set oCURRENCY_CD_TBL = oCURRENCY_CD.CURRENCY_CD_TBL
Set oCURRENCY_CD_TBLItem = oCURRENCY_CD_TBL.InsertItem(oCURRENCY_CD_⇒
TBL.CurrentItemNum())
oCURRENCY_CD_TBLItem.EFFDT = Date
oCURRENCY_CD_TBLItem.EFF_STATUS = "A"
oCURRENCY_CD_TBLItem.DESCR = "NewCurrencyCode"
oCURRENCY_CD_TBLItem.DESCRSHORT = "New"
oCURRENCY_CD_TBLItem.COUNTRY = "USA"
oCURRENCY_CD_TBLItem.CUR_SYMBOL = "?"
oCURRENCY_CD_TBLItem.DECIMAL_POSITIONS = 4
oCURRENCY_CD_TBLItem.SCALE_POSITIONS = 0

'***** Save Component Interface *****
oCURRENCY_CD.Save
oCURRENCY_CD.Cancel

Exit Sub

eMessage:
'***** Display VB Runtime Errors *****
MsgBox Err.Description

'***** Display PeopleSoft Error Messages *****
If oCISession.PSMessages.Count > 0 Then
    For i = 1 To oCISession.PSMessages.Count
        MsgBox oCISession.PSMessages.Item(i).Text
    Next i
End If

End Sub

Sub MAIN()
    CURRENCY_CD
End Sub

```

Inserting or Deleting a Row of Data Example


The CopyRowset and CopyRowsetDelta methods use the primary database name of a scroll, not the name you may give a collection.

A data collection represents a row of data. You often insert or delete a row of data.

To insert or delete a row of data:

In this example, you are getting a existing instance of data for the BUS_EXP Component Interface, which is based on the BUSINESS_EXPENSES component, then inserting (or deleting) a row of data in the second level scroll.

This example illustrates the fields and controls on the BUS_EXP Component Interface definition. You can find definitions for the fields and controls later on this page.

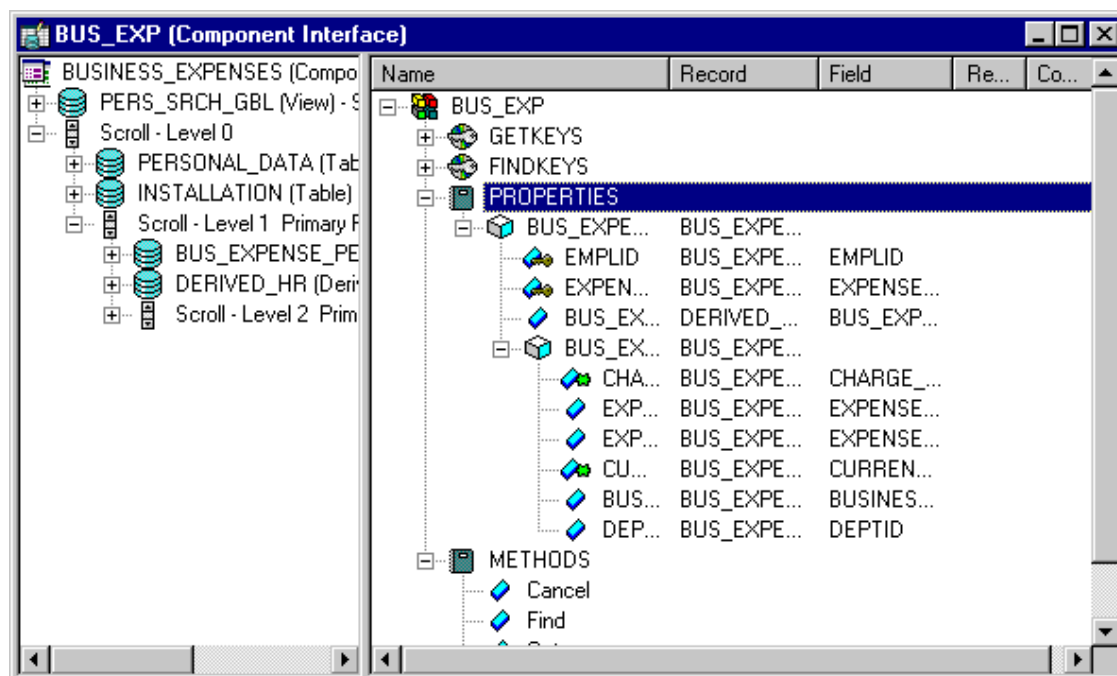

The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MYSESSION;  
Local ApiObject &MYCI;  
  
&MYSESSION = %Session;  
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.BUS_EXP);  
&MYCI.EMPLID= "8001";  
&MYCI.Get();  
&MYLEVEL1 = &MYCI.BUS_EXPENSE_PER;  
/* get appropriate item in lvl1 collection */  
For &I = 1 to &MYLEVEL1.Count  
&ITEM = &MYLEVEL1.Item(&I);  
&MYLEVEL2 = &ITEM.BUS_EXPENSE_DTL;  
&COUNT = &MYLEVEL2.Count  
/* get appropriate item in lvl2 collection */  
For &J = 1 to &COUNT  
&LVL2ITEM = &MYLEVEL2.Item(&J);  
&CIDATE = &LVL2ITEM.CHARGE_DT;  
If &CIDATE <> %Date Then  
    /* insert row */  
&NEWITEM = &MYLEVEL2.InsertItem(&COUNT);  
    /* set values for &NEWITEM */  
Else  
    /* delete last row */  
    &MYLEVEL2.DeleteItem(&COUNT);
```

```

End-If;
    End-For;
End-For;

If NOT(&MYCI.Save()) Then
    /* save didn't complete */
    &COLL = &MYSESSION.PSMessages;
    For &I = 1 to &COLL.Count
        &ERROR = &COLL.Item(&I);
        &TEXT = &ERROR.Text;
        /* do error processing */
    End-For;
    &COLL.DeleteAll();
End-if;

```

1. Get a session object.

Before you can get a Component Interface, you have to get a session object. The session controls access to the Component Interface, provides error tracing, enables you to set the runtime environment, and so on.

```
&MYSESSION = %Session;
```

2. Get a Component Interface.

Use the `GetCompIntfc` method with a session object to get the Component Interface. You must specify a Component Interface definition that has already been created. You receive a runtime error if you specify a Component Interface that doesn't exist.

```
&MYCI = &MYSESSION.GetCompIntfc(COMPINTFC.BUS_EXP);
```

After you execute the `GetCompIntfc` method, you have only the *structure* of the Component Interface. You haven't populated the Component Interface with data yet.

3. Set the GETKEYS.

These are the key values required to return a unique instance of existing data. If the keys you specify allow for more than one instance of the data to be returned, or if no instance of the data matching the key values is found, you receive a runtime error.

```
&MYCI.EMPLID = "8001";
```

4. Get the instance of data for the Component Interface.

After you set the key values, you must use the `Get` method.

```
&MYCI.Get();
```

This populates the Component Interface with data, based on the key values you set.

5. Get the level one scroll.

The name of the scroll can be treated like a property. It returns a data collection that contains all the level one data.

```
&MYLEVEL1 = &MYCI.BUS_EXPENSE_PER
```

6. Get the appropriate item in the level one data collection.

Remember, scroll data is hierarchical. You must get the appropriate level one row before you can access the level two data.

```
For &I = 1 to &MYLEVEL1.Count  
&ITEM = &MYLEVEL1.Item(&I);
```

7. Get the level two scroll.

This is done the same way as you accessed the level one scroll, by using the scroll name as a property.

```
&MYLEVEL2 = &ITEM.BUS_EXPENSE_DTL;
```

8. Get the appropriate item in the level two data collection.

A data collection is made up of a series of items (rows of data.) You have to access the appropriate item (row) in this level also.

```
&COUNT = &MYLEVEL2.Count  
/* get appropriate item in lvl2 collection */  
For &J = 1 to &COUNT  
&LVL2ITEM = &MYLEVEL2.Item(&J);
```

9. Insert or delete a row of data.

You can insert or delete a row of data from a data collection. The following example finds the last item (row of data) in the second level scroll. If it matches the value of %Date, the last item is deleted. If it doesn't match, a new row is inserted.

```
&CIDATE = &LVL2ITEM.CHARGE_DT;  
If &CIDATE <> %Date Then  
    /* insert row */  
    &NEWITEM = &MYLEVEL2.InsertItem(&COUNT);  
    /* set values for &NEWITEM */  
Else  
    /* delete last row */  
    &MYLEVEL2.DeleteItem(&COUNT);  
End-If;
```

10. Save the data.

When you execute the Save method, the new instance of the data is saved to the database.

```
If NOT(&MYCI.Save()) Then
```

The Save method returns a Boolean value: True if the save was successful, False otherwise. Use this value to do error checking.

The standard PeopleSoft save business rules (that is, any PeopleCode programs associated with SaveEdit, SavePreChange, WorkFlow, and so on) are executed. If you did not specify the Component Interface to run in interactive mode, FieldEdit, FieldChange, and so on, also run at this time.

Note

If you're running a Component Interface from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

11. Check Errors.

You can check if there were any errors using the PSMessages property on the session object.

```
If NOT(&MYCI.Save()) Then
  /* save didn't complete */
  &COLL = &SESSION.PSMessages;
  For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
    &TEXT = &ERROR.Text;
    /* do error processing */
  End-For;
  &COLL.DeleteAll();
End-if;
```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, delete it from the PSMessages collection.

The Text property of the PSMessage returns the text of the error message. At the end of this text is a contextual string that contains the name of the field that generated the error. The contextual string has the following syntax:

```
{BusinessComponentName.[CollectionName(Row).[CollectionName(Row).
[CollectionName⇒
(Row)]]].PropertyName}
```

For example, if you specified the incorrect format for a date field of the Component Interface named ABS_HIST, the Text property contains the following string:

```
Invalid Date {ABS_HIST.BEGIN_DT} (90), (1)
```

The contextual string (by itself) is available using the Source property of the PSMessage.

Note

If you've called the Component Interface from an Application Engine program, all errors are also logged in the Application Engine error log tables.

See [Error Handling](#), [Source property: PSMessage class](#).

Connected Query Classes

Understanding the Connected Query Classes

Connected query is a PeopleTools managed object that supports typical managed object functionality such as:

- Creating a new object.
- Editing an existing object.
- Deleting an object.
- Copying an object.
- Renaming an object.¹
- Caching an object.
- Adding an object to a project.
- Using project compare functionality.
- Copying to or restoring from a file.
- Upgrading to the database.

¹ Renaming a connected query object is supported on a managed object level, but is not exposed as a function in PeopleCode.

A connected query object is exposed to the report developer through the public methods and properties of the PT_CONQRS application package. The remainder of this chapter provides reference on those classes, methods, and properties.

Connected queries are described in more detail in the PeopleSoft Query PeopleBook.

Related Topics

- Query: Understanding Connected Query

Importing Connected Query Classes

The connected query classes are application classes, not built-in classes, like Rowset, Field, Record, and so on. Before you can use these classes in your PeopleCode program, you must import them into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

CONQRSMGR Class

This section provides an overview of the CONQRSMGR class and discusses:

- CONQRSMGR class constructor.
- CONQRSMGR class methods.
- CONQRSMGR class properties.

CONQRSMGR Class Constructor

This section presents the constructor for the CONQRSMGR class.

CONQRSMGR method: CONQRSMGR class

Example

```
import PT_CONQRS:CONQRSMGR;

Local PT_CONQRS:CONQRSMGR &objConQrsInst = create
PT_CONQRS:CONQRSMGR(&sOprId, ⇒
&sCONQRSNAME);
```

Note

The first parameter is not required; an empty string can be specified instead.

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

CONQRSMGR Class Methods

In this section, the CONQRSMGR class methods are presented in alphabetical order.

CleanOutputFile method: CONQRSMGR class

Syntax

```
CleanOutputFile()
```

Description

Use this method to delete the connected query output file.

Note

This method is valid only for a connected query scheduled for running to a file—that is, when the run mode is equal to `RunMode_Sched_File`.

Parameters

None.

Returns

None.

Close method: CONQRSMGR class

Syntax

```
Close()
```

Description

Use this method to clean up connected query resources.

Parameters

None.

Returns

None.

CopyDefn method: CONQRSMGR class

Syntax

```
CopyDefn(target_UserID, target_ID)
```

Description

Use this method to copy the connected query definition to a new ID. The user's query access security is checked prior to the copy.

Parameters

Parameter	Description
<i>target_UserId</i>	Specifies the user ID of the owner of the new connected query as a string. An empty string indicates that the new connected query is public.
<i>target_ID</i>	Specifies the ID for the new connected query as a string.

Returns

A Boolean value: True if the copy is successful, False otherwise.

DeleteDefn method: CONQRSMGR class

Syntax

```
DeleteDefn()
```

Description

Use this method to delete the current connected query definition.

Parameters

None.

Returns

A Boolean value: True if the delete was successful, False otherwise.

ExistsByName method: CONQRSMGR class

Syntax

```
ExistsByName( ObjName )
```

Description

Use this method to for the existence of a connected query definition based on the specified definition name.

Parameters

Parameter	Description
<i>ObjName</i>	Specifies the connected query definition name as a string.

Returns

A Boolean value: True if connected query definition exists, False otherwise.

GetSampleXMLString method: CONQRSMGR class

Syntax

GetSampleXMLString(*RowNum*)

Description

Use this method to generate and return a sample XML string. Use this string with BI Publisher data sources based on a connected query.

Parameters

Parameter	Description
<i>RowNum</i>	Sets number of rows of sample data to generate for each member query.

Returns

A string representing the sample XML data.

Open method: CONQRSMGR class

Syntax

Open(*IsNew*)

Description

Use this method to open a new or existing connected query definition.

This method should be called after a connected query object constructor. It initializes a new or existed connected query object.

Parameters

Parameter	Description
<i>IsNew</i>	Specifies as a Boolean value whether the connected query object represents a new connected query definition (True), or an existing definition (False).

Returns

A Boolean value: True if the open was successful, False otherwise.

ResetQueriesPrompt method: CONQRSMGR class

Syntax

ResetQueriesPrompt()

Description

Use this method after a user clicks Cancel in a query prompt dialog.

Parameters

None.

Returns

None.

Run method: CONQSMGR class

Syntax

```
Run(Prompts, runProcessInfo)
```

Description

Use this method to run the connected query. The Run method is valid for the following run modes only:

- RunMode_Prev — Referred to as *preview mode*.
- RunMode_Sched_Web or RunMode_Sched_File — Referred to as *scheduled mode*.

If an error results, the Run method populates an error string with error details.

Parameters

Parameter	Description
<i>Prompts</i>	Specifies the prompts for execution of the queries as an array of QUERYITEMPROMPT objects. This parameter should be set to null when running in scheduled mode.
<i>runProcessInfo</i>	Specifies the scheduling information for running the queries as a SCHED_INFO object. This parameter <i>must</i> be null when running in preview mode.

Returns

A Boolean value: True if the connected query was run successfully, False otherwise.

Preview Mode

In preview mode, the connected query is run immediately on the application sever. The output data is displayed in a separate browser window. In preview mode, the *Prompts* parameter is required; the *runProcessInfo* parameter *must* be set to Null. The *Prompts* parameter should be retrieved using the QueriesPromptsArray property. If this array length is greater than 0, this array must be populated.

Note

If both parameters are not null, the scheduling information is used to run the connected query by Process Scheduler.

Scheduled Mode

In scheduled mode, the connected query is run by Process Scheduler. In the case of `RunMode_Sched_File`, the output data is written to an XML file. In the case of `RunMode_Sched_Web`, the output data is accessible via a hyperlink in Process Monitor. In scheduled mode, the `runProcessInfo` parameter is required; the `Prompts` parameter should be set to Null.

Note

If both parameters are not null, the scheduling information is used to run the connected query by Process Scheduler.

Related Topics

- [RunToWindow method: CONQRSMGR class](#)
- [RunToXMLFormattedString method: CONQRSMGR class](#)
- [QueriesPromptsArray property: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)
- [QUERYITEMPROMPT Class](#)
This section provides an overview of the QUERYITEMPROMPT class and discusses QUERYITEMPROMPT class properties.
- [SCHED_INFO Class](#)
This section provides an overview of the SCHED_INFO class and discusses SCHED_INFO class properties.
- [Running a Connected Query in Scheduled Mode](#)
In scheduled mode, the connected query is run by Process Scheduler. In the case of `RunMode_Sched_File`, the output data is written to an XML file. In the case of `RunMode_Sched_Web`, the output data is accessible via a hyperlink in Process Monitor. In scheduled mode, the `runProcessInfo` parameter is required; the `Prompts` parameter should be set to Null.
- [Running a Connected Query in Preview Mode or Background Mode](#)
In preview mode, the connected query is run immediately on the application sever. The output data is displayed in a separate browser window. In preview mode, the `Prompts` parameter is required; the `runProcessInfo` parameter *must* be set to Null. The `Prompts` parameter should be retrieved using the `QueriesPromptsArray` property. If this array length is greater than 0, this array must be populated.

RunToWindow method: CONQRSMGR class

Syntax

RunToWindow()

Description

Use this method to run a connected query in *background mode*. Similar to preview mode, running a connected query in background mode results in the output data being displayed in a separate browser window. However, in background mode, the connected query is run through Process Scheduler with a REN server. Running a connected query in this manner prevents blocking on the application server. While the report file is generated, the user can continue working with the PeopleSoft application and the application server environment.

To specify the scheduling information, prior to invoking the RunToWindow method, you must invoke the SetRunControlData method as follows:

```
&res = &objConQrsInst.SetRunControlData(&objConQrsInst.Const.⇒  
RunCntlId_Auto, False);
```

The RunToWindow method is valid for the RunMode_Window run mode only.

Parameters

None.

Returns

The process ID as a number.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunToXMLFormattedString method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)
- [Running a Connected Query in Preview Mode or Background Mode](#)
In preview mode, the connected query is run immediately on the application sever. The output data is displayed in a separate browser window. In preview mode, the *Prompts* parameter is required; the *runProcessInfo* parameter *must* be set to Null. The *Prompts* parameter should be retrieved using the QueriesPromptsArray property. If this array length is greater than 0, this array must be populated.

RunToXMLFormattedString method: CONQRSMGR class

Syntax

RunToXMLFormattedString(*Prompts*)

Description

Use this method to run the connected query immediately on the application server with output to an XML formatted string instead of an XML file.

The RunToXMLFormattedString method is valid for the RunMode_XMLFormattedString run mode only.

Parameters

Parameter	Description
<i>Prompts</i>	Specifies the prompts for execution of the queries as an array of QUERYITEMPROMPT objects. This parameter should be retrieved using the QueriesPromptsArray property. If this array length is greater than 0, this array must be populated.

Returns

The formatted XML as a string.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunToWindow method: CONQRSMGR class](#)
- [QueriesPromptsArray property: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)
- [QUERYITEMPROMPT Class](#)
This section provides an overview of the QUERYITEMPROMPT class and discusses QUERYITEMPROMPT class properties.

Save method: CONQRSMGR class

Syntax

Save()

Description

Use this method to save the connected query object to the database as a connected query definition. If the connected query does not pass validation, it is saved with an inactive status.

Parameters

None.

Returns

A Boolean value: True if the save was successful, False otherwise.

SaveRunControlParms method: CONQRSMGR class

Syntax

SaveRunControlParms(*runCntlID*)

Description

Use this method to save the in-memory process request parameter array to the database. This method is also called internally from the `SetRunControlData` method when `IsChangeDB` is true.

Parameters

Parameter	Description
<i>runCntlID</i>	Specifies the run control ID as a string.

Returns

A Boolean value: True if the save was successful, False otherwise.

Related Topics

- [SetRunControlData method: CONQRSMGR class](#)

SetRunControlData method: CONQRSMGR class

Syntax

```
SetRunControlData(runCntlID, IsNewCtrl, IsChangeDB)
```

Description

Use this as an interactive method to prompt the user if member queries have prompts. This method saves prompt data to the database using the `PSCONQRSRUNPRM` or `PSCONQRSRUNPRMX` records if the `IsChangeDB` parameter is passed as true. Call this method prior to scheduling a connected query to run in scheduled mode.

Parameters

Parameter	Description
<i>runCntlID</i>	Specifies the run control ID as a string.
<i>IsNewCtrl</i>	Specifies as a Boolean value whether the run control is new.
<i>IsChangeDB</i>	Specifies as a Boolean value whether to write the run control information to the database.

Returns

A Boolean value: True if the run control parameters were set successfully, False otherwise.

Validate method: CONQRSMGR class

Syntax

```
Validate()
```

Description

Use this method to validate the following:

- The existence of each query used in the connected query.
- Whether mapped fields used in the connected query object are still part of the QueryOutputFields collection for each query.
- The user security access for each query.

If validation fails, Validate populates an error string with the error details.

Parameters

None.

Returns

A Boolean value: True if the connected query passes all the validation checks, False otherwise.

Related Topics

- [QueryOutputFields property: QuerySelect class](#)

ValidateIfFieldsMapped method: CONQRSMGR class

Syntax

```
ValidateIfFieldsMapped()
```

Description

Use this method to check whether all queries have mapped fields. Use this method to confirm that it is the report developer's intention to have unmapped fields in the queries.

If validation fails, ValidateIfFieldsMapped populates an error string with the names of the unlinked queries.

Parameters

None.

Returns

A Boolean value: True if all the queries have mapped fields, False otherwise.

ValidateRunControlParms method: CONQRSMGR class

Syntax

```
ValidateRunControlParms(runCnt lID)
```

Description

Use this method to determine whether sufficient populated records exist in the or PSCONQRSRUNPRMX tables for the specified run control ID. ValidateRunControlParms

compares the number of entries in the parameter tables with the number of prompts required for the connected query.

If validation fails, `ValidateRunControlParms` populates an error string with the error details.

Parameters

Parameter	Description
<i>runCntIID</i>	Specifies the run control ID as a string.

Returns

A Boolean value: True if the validation is successful, False otherwise.

CONQRSMGR Class Properties

In this section, the CONQRSMGR class properties are presented in alphabetical order.

Const property: CONQRSMGR class

Description

This property returns a `CONQRS_CONST` object.

This property is read-only.

Related Topics

- [CONQRS_CONST Class](#)
This section provides an overview of the `CONQRS_CONST` class and discusses `CONQRS_CONST` class properties.

Description property: CONQRSMGR class

Description

Use this property to set or return a description for the connected query as a string.

This property is read/write.

Details property: CONQRSMGR class

Description

Use this property to set or return a long description for the connected query as a string.

This property is read/write.

ErrString property: CONQRSMGR class

Description

This property returns the error message as a string if an error occurs during processing.

This property is read-only.

ExecutionLog property: CONQRSMGR class

Description

Use this property to return a Boolean value indicating whether to perform execution logging while executing the connected query.

This property is read-only.

Note

While this property is read-only, it can be set through the PropertyArray property.

The default value is False.

Related Topics

- [IsDebugMode property: CONQRSMGR class](#)
- [PropertyArray property: CONQRSMGR class](#)

IgnoreRelFldOutput property: CONQRSMGR class

Description

Use this property to return a Boolean value indicating whether to create XML output without related field nodes.

This property is read-only.

Note

While this property is read-only, it can be set through the PropertyArray property.

The default value is False.

Related Topics

- [PropertyArray property: CONQRSMGR class](#)

IsChanged property: CONQRSMGR class

Description

This property returns a Boolean value indicating whether the connected query has been changed.

Note

When an existing connected query is opened, IsChanged is initialized to False.

This property is read-only.

IsDebugMode property: CONQRSMGR class

Description

Use this property to return a Boolean value indicating whether to perform logging while executing the connected query. In addition, in debug mode, temporary files generated during execution of the connected query are not deleted after execution is complete. The log also contains SQL statements generated by each member query as well as values for the related fields used to link the parent query to its children.

This property is read-only.

Note

While this property is read-only, it can be set through the PropertyArray property.

The default value is False.

Related Topics

- [ExecutionLog property: CONQRSMGR class](#)
- [PropertyArray property: CONQRSMGR class](#)

IsInit property: CONQRSMGR class

Description

This property returns a Boolean value indicating whether the connected query object has been initialized (opened) after object instance was created.

This property is read-only.

IsPublic property: CONQRSMGR class

Description

This property returns a Boolean value indicating whether the connected query is public.

This property is read-only.

LastUpdatedBy property: CONQRSMGR class

Description

This property returns the user ID of the user to have last updated the connected query, as a string.

This property is read-only.

LastUpdateDTTM property: CONQRSMGR class

Description

This property returns the last update date and time for the connected query, as a DateTime value.

This property is read-only.

MaxRowsPerQuery property: CONQRSMGR class

Description

Use this property to set or return a number representing the maximum number of rows returned by each query in preview mode. If set to 0, no maximum is set.

This property is read/write.

Name property: CONQRSMGR class

Description

This property returns the name of the connected query as a string.

This property is read-only.

ObjectRowset property: CONQRSMGR class

Description

Use this property to set or return a Rowset object. The parent record for this rowset is PSCONQRSMAPVW; its child record is PSCONQRSFLDRLVW. Use of the ObjectRowset property and its associated rowset prevents the report developer from directly manipulating the managed object itself.

Getting the ObjectRowset property returns a Rowset object with the following structure, populated with Connected Query Manager data:

```
ObjectRowset = CreateRowset(Record.PSCONQRSMAPVW, CreateRowset⇒  
(Record.PSCONQRSFLDRLVW));
```

Setting the ObjectRowset property returns the rowset data back to the Connected Query Manager.

This property is read/write.

Related Topics

- [Iterating Through a Connected Query Opened for Editing](#)
This example demonstrates usage of the connected query ObjectRowset property. The program opens an instance from an existing connected query definition. The program retrieves the rowset from the ObjectRowset property, and changes some of its properties. It saves the rowset back to ObjectRowset property, and then saves the modified connected query definition back to the database.

OprID property: CONQRSMGR class

Description

This property returns a string representing the user ID to which the connected query belongs to for private queries. For public queries, an empty string is returned.

This property is read-only.

OutProcessFileName property: CONQRSMGR class

Description

This property returns a string representing the output file name as an absolute path.

Note

This property is valid only for a connected query scheduled for running to a file—that is, when the run mode is equal to `RunMode_Sched_File`.

This property is read-only.

PropertyArray property: CONQRSMGR class

Description

Use this property to set or return an array of `CONQRSPROPERTY` objects (properties) for the connected query. If no properties exist, this array returns the default set of properties.

This property is read/write.

The following read-only properties of the `CONQRSMGR` class are dynamically synchronized whenever the `PropertyArray` property is set or returned:

- `ExecutionLog`
- `IgnoreRelFldOutput`
- `IsDebugMode`
- `ShowFormattedXML`

Example

The first example retrieves a set of properties from the database and populates the page grid using the `Page Activate` event:

```
import PT_CONQRS:CONQRSMGR;  
import PT_CONQRS:CONQRSPROPERTY;  
  
Component PT_CONQRS:CONQRSMGR &cConQrsInst;  
  
Local array of PT_CONQRS:CONQRSPROPERTY &propArr;  
Local Rowset &rsProp;  
Local number &i, &j;
```

```

&propArr = &cConQrsInst.PropertyArray;
If &propArr.Len = 0 Then
    Return;
End-If;
Local Record &recProp, &recWrk;
&rsProp = GetLevel0()(1).GetRowset(Scroll.PSCONQRSPROP);
&rsProp.Flush();
For &i = 1 To &propArr.Len
    If &i > 1 Then
        &rsProp.InsertRow(&i - 1);
    End-If;
    &recProp = &rsProp(&i).PSCONQRSPROP;
    &recProp.PROPVALUEOPTION.ClearDropDownList();
    For &j = 1 To &propArr [&i].PROPVALUEARRAY.Len
        &recProp.PROPVALUEOPTION.AddDropDownItem(&propArr [&i].PROPVALUEARRAY
[&j], =>
&propArr [&i].PROPVALUEARRAYDESC [&j]);
    End-For;
    &recProp.PROPNAME.Value = &propArr [&i].PROPNAME;
    &recProp.PROPVALUEOPTION.Value = &propArr [&i].PROPVALUE;
    &recProp.OPRID.Value = &cConQrsInst.OprID;
    &recProp.CONQRNAME.Value = &cConQrsInst.Name;
    &recWrk = &rsProp(&i).PSCONQRS_WRK;
    &recWrk.PROPVALUEOPTION.Value = &propArr [&i].PROPDEFAULT;
End-For;

```

The second example populates a property array from a page grid. This program is executed when a user hits the OK button on a secondary page, PSCONQRSPROPS:

```

import PT_CONQRS:CONQRSMGR;
import PT_CONQRS:CONQRSPROPERTY;

Component PT_CONQRS:CONQRSMGR &cConQrsInst;

If %Page = Page.PSCONQRSPROPS Then
    Local array of PT_CONQRS:CONQRSPROPERTY &propArr;
    Local Rowset &rsProp;
    Local number &i;
    Local Record &recProp, &recWrk;

    /* Get the property array from the database. */
    &propArr = &cConQrsInst.PropertyArray;
    If &propArr.Len = 0 Then
        Return;
    End-If;
    &rsProp = GetLevel0()(1).GetRowset(Scroll.PSCONQRSPROP);
    If &propArr.Len <> &rsProp.ActiveRowCount Then
        Return;
    End-If;
    For &i = 1 To &rsProp.ActiveRowCount
        &recProp = &rsProp(&i).PSCONQRSPROP;
        &recWrk = &rsProp(&i).PSCONQRS_WRK;
        If None(&recProp.PROPNAME.Value) Then
            &recProp.PROPNAME.Value = &recWrk.PROPVALUEOPTION.Value;

```

```
End-If;  
&propArr [&i].PROPNAME = &recProp.PROPNAME.Value;  
&propArr [&i].PROPVALUE = &recProp.PROPVALUEOPTION.Value;  
&propArr [&i].PROPDEFAULT = &recWrk.PROPVALUEOPTION.Value;  
End-For;  
  
/* Return the modified property array to the database. */  
&cConQrsInst.PropertyArray = &propArr;  
End-If;
```

Related Topics

- [ExecutionLog property: CONQRSMGR class](#)
- [IgnoreRelFldOutput property: CONQRSMGR class](#)
- [IsDebugMode property: CONQRSMGR class](#)
- [ShowFormattedXML property: CONQRSMGR class](#)
- [CONQRSPROPERTY Class](#)
The CONQRSPROPERTY class is a data structure that exposes connected query properties. Individual members of the CONQRSPROPERTY class should be retrieved and set through the CONQRSMGR class, PropertyArray property, which is an array of CONQRSPROPERTY objects.

QueriesPromptsArray property: CONQRSMGR class

Description

This property returns an array of QUERYITEMPROMPT objects. This array is used by the connected query object as a parameter to the Run method in preview mode.

This property is read-only.

Related Topics

- [QUERYITEMPROMPT Class](#)
This section provides an overview of the QUERYITEMPROMPT class and discusses QUERYITEMPROMPT class properties.

QueryArray property: CONQRSMGR class

Description

This property returns an array of string representing the query names that constitute the connected query object.

This property is read-only.

RegisteredBy property: CONQRSMGR class

Description

This property returns a string representing the user ID of the user who created the connected query object.

This property is read-only.

RegisteredDTTM property: CONQRSMGR class

Description

This property returns the creation date and time for the connected query, as a DateTime value.

This property is read-only.

RunCntlId property: CONQRSMGR class

Description

This property returns a string representing the run control ID for scheduling the connected query.

This property is read-only.

RunControlParArray property: CONQRSMGR class

Description

This property returns an array of PSCONQRSRUNPRM records to be used for displaying and updating the set of scheduling parameters for the queries.

This property is read-only.

RunMode property: CONQRSMGR class

Description

This property returns a number representing the run mode for a connected query instance. The values are:

Numeric Value	Constant Value	Description
1	RunMode_Window	Run the connected query in background mode with output to a separate browser window. The connected query runs via Process Scheduler and uses a REN server for delivering the output XML to the user. The XML result file is delivered to both the REN server window and the Report Manager.
2	RunMode_Sched_Web	Run the connected query at a scheduled time with output to web. The connected query is scheduled to output the XML result file to the Report Manager. It can be accessed by the user via a Report Manager link.

Numeric Value	Constant Value	Description
3	RunMode_Sched_File	Run the connected query at a scheduled time with output to a file name and location specified by the user.
4	RunMode_Prev	Run the connected query immediately in preview mode with output to a separate browser window. The connected query is executed immediately on the application server with output to a separate browser window. The output XML is not formatted internally; the only formatting that occurs is performed by the browser. Because results only exist for the browser session and are not preserved, this mode should be used during connected query creation, debugging, and tuning only. Note: When using the preview mode, set a limit on the number of rows returned from each query. See MaxRowsPerQuery property: CONQRSMGR class, RunMode_Prev_DefRowNumber property: CONQRS_CONST class.
5	RunMode_Sample	Run the connected query immediately with output to a file that is suitable as a BI Publisher data source.

Numeric Value	Constant Value	Description
6	RunMode_XMLFormattedString	Run the connected query immediately with output to a formatted XML string. This formatted XML string is larger than the unformatted XML of the RunMode_Prev mode. The connected query is executed immediately on the application server with output to a formatted XML string. This string is formatted according to the XML DOM object and is suitable for displaying in a long edit box. This mode is used by the Connected Query Quick Start wizard in which XML results are previewed on the application page in a long edit box. Note: When using the formatted XML string preview mode, set a limit on the number of rows returned from each query. See MaxRowsPerQuery property: CONQRSMGR class, RunMode_Prev_DefRowNumber property: CONQRS_CONST class.

This property is read-only.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunToWindow method: CONQRSMGR class](#)
- [RunToXMLFormattedString method: CONQRSMGR class](#)
- [RunMode_Prev property: CONQRS_CONST class](#)
- [RunMode_Sample property: CONQRS_CONST class](#)
- [RunMode_Sched_File property: CONQRS_CONST class](#)
- [RunMode_Sched_Web property: CONQRS_CONST class](#)
- [RunMode_Window property: CONQRS_CONST class](#)
- [RunMode_XMLFormattedString property: CONQRS_CONST class](#)

SchedInfo property: CONQRSMGR class

Description

Use this property to set or return a SCHED_INFO object to be populated with scheduling details. Use the property as a parameter to the Run method for scheduling connected query

execution when the run mode is RunMode_Window, RunMode_Sched_Web, or RunMode_Sched_File.

This property is read/write.

Related Topics

- [SCHED_INFO Class](#)
This section provides an overview of the SCHED_INFO class and discusses SCHED_INFO class properties.

SchedRequestType property: CONQRSMGR class

Description

Use this property to set or return a string indicating which application scheduled the connected query process. The values are:

Value	Description
CQR	Connected Query Manager
XMLP	BI Publisher

Separate run control parameter records (PSCONQRSRUNPRM or PSCONQRSRUNPRMX) are used for different values of this property.

This property is read/write.

SecProfile property: CONQRSMGR class

Description

This property returns a SEC_PROFILE object, which shows the user's query access level as defined for the query.

This property is read-only.

Related Topics

- [SEC_PROFILE Class](#)
This section provides an overview of the SEC_PROFILE class and discusses:

ShowFormattedXML property: CONQRSMGR class

Description

Use this property to return a Boolean value indicating whether to retain indentation when generating XML output.

This property is read-only.

Note

While this property is read-only, it can be set through the PropertyArray property.

The default value is False.

Related Topics

- [PropertyArray property: CONQRSMGR class](#)

Status property: CONQRSMGR class

Description

Use this property to set or return a string representing the status of the connected query. The values are:

Value	Description
A	Active
I	Inactive
Value	Description
P	In progress.

This property is read/write.

XMLDataFileName property: CONQRSMGR class

Description

This property returns the short name for the XML data file as a string.

This property is read-only.

XMLDataFullName property: CONQRSMGR class

Description

This property returns the long name for the XML data file as a string.

This property is read-only.

CONQRSPROPERTY Class

The CONQRSPROPERTY class is a data structure that exposes connected query properties. Individual members of the CONQRSPROPERTY class should be retrieved and set through the CONQRSMGR class, PropertyArray property, which is an array of CONQRSPROPERTY objects.

Related Topics

- [PropertyArray property: CONQRSMGR class](#)

CONQRSPROPERTY Class Properties

In this section, the CONQRSPROPERTY class properties are presented in alphabetical order.

PROPDEFAULT property: CONQRSPROPERTY class

Description

Use this property to set or return the default property value as a string.

This property is read/write.

PROPNAME property: CONQRSPROPERTY class

Description

Use this property to set or return the property name as a string.

This property returns a Boolean value indicating that the specified connected query already exists. The value is False.

This property is read/write.

PROPVVALUE property: CONQRSPROPERTY class

Description

Use this property to set or return the current property value as a string.

This property is read/write.

PROPVVALUEARRAY property: CONQRSPROPERTY class

Description

Use this property to set or return an array of string representing the valid property values.

This property is read/write.

PROPVVALUEARRAYDESC property: CONQRSPROPERTY class

Description

Use this property to set or return an array of string representing the descriptions for the valid property values.

This property is read/write.

CONQRS_CONST Class

This section provides an overview of the CONQRS_CONST class and discusses CONQRS_CONST class properties.

The CONQRS_CONST class is a data structure that exposes read-only properties representing constant values. An instance of the CONQRS_CONST class is created through the Const property of the CONQRSMR class.

Related Topics

- [Const property: CONQRSMGR class](#)

CONQRS_CONST Class Properties

In this section, the CONQRS_CONST class properties are presented in alphabetical order.

InitExisting property: CONQRS_CONST class

Description

This property returns a Boolean value indicating that the specified connected query already exists. The value is False.

Use InitExisting as an argument to the Open method.

This property is read-only.

Related Topics

- [Open method: CONQRSMGR class](#)

InitNew property: CONQRS_CONST class

Description

This property returns a Boolean value indicating that the specified connected query is new. The value is True.

Use InitNew as an argument to the Open method.

This property is read-only.

Related Topics

- [Open method: CONQRSMGR class](#)

MsgSet property: CONQRS_CONST class

Description

This property returns the number 241 as the message set number for connected query.

This property is read-only.

RunCntlId_Auto property: CONQRS_CONST class

Description

This property returns the string PSCONQRS_AUTORUN.

Use this property with the SetRunControlData method for the RunMode_Window mode. It indicates that the run control ID for the connected query process should be generated automatically.

This property is read-only.

Related Topics

- [SetRunControlData method: CONQRSMGR class](#)
- [RunMode_Window property: CONQRS_CONST class](#)

RunMode_Prev property: CONQRS_CONST class

Description

This property returns the number 4, which represents the preview run mode with output to a separate browser window.

The connected query is executed immediately on the application server with output to a separate browser window. The output XML is not formatted internally; the only formatting that occurs is performed by the browser. Because results only exist for the browser session and are not preserved, this mode should be used during connected query creation, debugging, and tuning only.

Note

When using the preview mode, set a limit on the number of rows returned from each query.

This property is read-only.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)
- [MaxRowsPerQuery property: CONQRSMGR class](#)
- [RunMode_Prev_DefRowNumber property: CONQRS_CONST class](#)

RunMode_Prev_DefRowNumber property: CONQRS_CONST class

Description

This property returns the number 6, which represents the default number of rows returned for connected queries running in the RunMode_Prev or RunMode_XMLFormattedString modes.

This property is read-only.

Related Topics

- [MaxRowsPerQuery property: CONQRSMGR class](#)
- [RunMode_Prev property: CONQRS_CONST class](#)
- [RunMode_XMLFormattedString property: CONQRS_CONST class](#)

RunMode_Sample property: CONQRS_CONST class

Description

This property returns the number 5, which represents a run mode that produces a sample XML string that can be used by a BI Publisher data source as a sample XML string.

This property is read-only.

Related Topics

- [RunMode property: CONQRSMGR class](#)

RunMode_Sched_File property: CONQRS_CONST class

Description

This property returns the number 3, which represents the scheduled run mode with output to a file name and location specified by the user.

This property is read-only.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)

RunMode_Sched_Web property: CONQRS_CONST class

Description

This property returns the number 2, which represents the scheduled run mode with output to the web (that is, Report Manager).

The output can be accessed by the user via a Report Manager link.

This property is read-only.

Related Topics

- [Run method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)

RunMode_Window property: CONQRS_CONST class

Description

This property returns the number 1, which represents the background run mode with output to a separate browser window.

The connected query runs via Process Scheduler and uses a REN server for delivering the output XML to the user. The XML result file is delivered to both the REN server window and the Report Manager.

This property is read-only.

Related Topics

- [RunToWindow method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)

RunMode_XMLFormattedString property: CONQRS_CONST class

Description

This property returns the number 6, which represents the run mode that produces an formatted XML string. This formatted XML string is larger than the unformatted XML of the RunMode_Prev mode.

The connected query is executed immediately on the application server with output to a formatted XML string. This string is formatted according to the XML DOM object and is suitable for displaying in a long edit box. This mode is used by the Connected Query Quick Start wizard in which XML results are shown on the application page in a long edit box.

Note

When using the preview mode, set a limit on the number of rows returned from each query.

This property is read-only.

Related Topics

- [RunToXMLFormattedString method: CONQRSMGR class](#)
- [RunMode property: CONQRSMGR class](#)
- [MaxRowsPerQuery property: CONQRSMGR class](#)
- [RunMode_Prev_DefRowNumber property: CONQRS_CONST class](#)

SchedRequest_CQR property: CONQRS_CONST class

Description

This property returns the string CQR representing that connected query execution was invoked by the Connected Query Manager. The value of this property is used as a part of the SCHED_INFO data structure.

This property is read-only.

SchedRequest_XMLP property: CONQRS_CONST class

Description

This property returns the string XMLP, representing that connected query execution was invoked by BI Publisher. The value of this property is used as a part of the SCHED_INFO data structure.

This property is read-only.

Stat_Active property: CONQRS_CONST class

Description

This property returns the string A indicating that the connected query definition is active.

This property is read-only.

Stat_InActive property: CONQRS_CONST class

Description

This property returns the string I indicating that the connected query definition is inactive. A connected query can be set to inactive if it did not pass a validation.

This property is read-only.

Stat_InProgress property: CONQRS_CONST class

Description

This property returns the string P indicating that the connected query definition is in progress. A connected query that is "in process" be run in preview mode only. It cannot be scheduled, and it is not be visible to BI Publisher.

This property is read-only.

QUERYITEMPROMPT Class

This section provides an overview of the QUERYITEMPROMPT class and discusses QUERYITEMPROMPT class properties.

The QUERYITEMPROMPT class is a data structure that exposes read-only properties representing query prompts. An array of instances of this class is exposed via the QueriesPromptsArray property of the CONQRSMR class. Therefore, only an import statement is required, and no constructor:

```
import PT_CONQRS:QUERYITEMPROMPT;
```

Related Topics

- [QueriesPromptsArray property: CONQRSMGR class](#)
- [Import Declarations](#)

Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

QUERYITEMPROMPT Class Properties

In this section, the QUERYITEMPROMPT class properties are presented in alphabetical order.

QueryName property: QUERYITEMPROMPT class

Description

This property returns as string representing the name of a query that participates in the connected query.

This property is read-only.

QueryPromptRecord property: QUERYITEMPROMPT class

Description

This property returns a Record object with the runtime prompts for the query.

This property is read-only.

SCHED_INFO Class

This section provides an overview of the SCHED_INFO class and discusses SCHED_INFO class properties.

The SCHED_INFO class is a data structure that exposes the class constructor and read/write properties representing run controls and scheduling information. An instance of this class is exposed via the SchedInfo property of the CONQRSMR class. Therefore, only an import statement is required, and no constructor:

```
import PT_CONQRS:SCHED_INFO;
```

Related Topics

- [SchedInfo property: CONQRSMGR class](#)

- [Import Declarations](#)

Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

SCHED_INFO Class Properties

In this section, the SCHED_INFO class properties are presented in alphabetical order.

AE_ID property: SCHED_INFO class

Description

Use this property to set or return a string indicating which application scheduled execution of the connected query. The values are:

Value	Description
CQR (the default)	Connected Query Manager
XMLP	BI Publisher

This property is read/write.

DIRLOCATION property: SCHED_INFO class

Description

Use this property to set or return a string representing the directory location for temporary files generated during processing of a scheduled connected query. This directory should be the same as the log/output directory specified in the psprcs.cfg file, allowing the connected query to use the distribution features of Process Scheduler.

This property is read/write.

OPRID property: SCHED_INFO class

Description

Use this property to set or return a string representing the ID of the user who initiated the process.

This property is read/write.

OUTDESTTYPE property: SCHED_INFO class

Description

Use this property to set or return the Process Scheduler output destination type as a number. The values are:

Value	Description
2	File
4	Window
6	Web

This property is read/write.

PRCSFILENAME property: SCHED_INFO class

Description

Use this property to set or return the output file name as a string. This property is required when OUTDESTTYPE equals 2 (file). Specify an absolute path and file name that is accessible by the Process Scheduler server.

This property is read/write.

PROCESS_INSTANCE property: SCHED_INFO class

Description

Use this property to set or return the process instance as a string.

This property is read/write.

RUN_CNTL_ID property: SCHED_INFO class

Description

Use this property to set or return the run control ID as a string.

This property is read/write.

SEC_PROFILE Class

This section provides an overview of the SEC_PROFILE class and discusses:

- SEC_PROFILE class constructor.
- SEC_PROFILE class properties.

The SEC_PROFILE class is a data structure that exposes the class constructor and read-only properties representing the security access to the connected query for this user's session.

Related Topics

- [SecProfile property: CONQRSMGR class](#)

SEC_PROFILE Class Constructor

This section presents the constructor for the SEC_PROFILE class.

SEC_PROFILE method: SEC_PROFILE class

Example

```
import PT_CONQRS:SEC_PROFILE;
```

```
Local PT_CONQRS:SEC_PROFILE &SecProfile = create PT_CONQRS:SEC_PROFILE();
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

SEC_PROFILE Class Properties

In this section, the SEC_PROFILE class properties are presented in alphabetical order.

CanCreatePublic property: SEC_PROFILE class

Description

This property returns a Boolean value indicating whether the user can create a public connected query.

This property is read-only.

CanModify property: SEC_PROFILE class

Description

This property returns a Boolean value indicating whether the user can modify the connected query.

This property is read-only.

CanRunQuery property: SEC_PROFILE class

Description

This property returns a Boolean value indicating whether the user can run the connected query.

This property is read-only.

UTILITY Class

This section provides an overview of the UTILITY class and discusses:

- UTILITY class constructor.
- UTILITY class methods.

The UTILITY class is a data structure that exposes the class constructor and utility methods used for validation. The UTILITY class does not require that a connected query be opened first.

UTILITY Class Constructor

This section presents the constructor for the UTILITY class.

UTILITY method: UTILITY class

Example

```
import PT_CONQRS:UTILITY;  
  
Local PT_CONQRS:UTILITY &utility = create PT_CONQRS:UTILITY();
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

UTILITY Class Methods

In this section, the UTILITY class methods are presented in alphabetical order.

CheckQryForTreePrompt method: UTILITY class

Syntax

```
CheckQryForTreePrompt(QryName, scope)
```

Description

Use this method to checks if a specific query uses tree prompts.

! Important

Connected query does not support queries with tree prompts.

Parameters

Parameter	Description
<i>QryName</i>	Specifies the query name as a string.
<i>scope</i>	Specifies the query scope as a string. If a valid value is not specified, CheckQryForTreePrompt searches to determine the scope. The values are: • R — Private • U — Public

Returns

The empty string if the query does not use tree prompts; otherwise, an error string.

CheckQrySecurity method: UTILITY class

Syntax

```
CheckQrySecurity(QryName, IsPublicObject)
```

Description

Use this method to check user access security for a single query. CheckQrySecurity performs the following checks:

- Whether the query is public for public connected queries (*IsPublicObject* is True).
- Whether the query is disabled.
- Whether the query has tree prompts by invoking CheckQryForTreePrompt.
- Whether there are query prompt security violations.

Parameters

Parameter	Description
<i>QryName</i>	Specifies the query name as a string.
<i>IsPublicObject</i>	Specifies a Boolean value indicating whether the connected query is public.

Returns

A Boolean value: True if the security validation was successful, False otherwise.

GetQueryScopeByName method: UTILITY class

Syntax

GetQueryScopeByName(*QryName*)

Description

Use this method to check whether the specified query has a public or private scope.

Parameters

Parameter	Description
<i>QryName</i>	Specifies the query name as a string.

Returns

A number:

- 0 — Private query.
- 1 — Public query.
- 2 — Query not found.

ValidateObjectID method: UTILITY class

Syntax

ValidateObjectID(*ID*)

Description

Use this method to check whether the specified ID (connected query ID or run control ID) contains special characters. Valid characters for IDs include A-Z, 0–9, and _.

Parameters

Parameter	Description
<i>ID</i>	Specifies the ID to be validated as a string.

Returns

An empty string if the validation was successful; otherwise, an error string.

Connected Query Classes Examples

This section includes examples of connected query classes in various modes.

Running a Connected Query in Scheduled Mode

In scheduled mode, the connected query is run by Process Scheduler. In the case of `RunMode_Sched_File`, the output data is written to an XML file. In the case of `RunMode_Sched_Web`, the output data is accessible via a hyperlink in Process Monitor. In scheduled mode, the `runProcessInfo` parameter is required; the `Prompts` parameter should be set to Null.

The following example represents a PeopleCode step to be run via Application Engine:

```
import PT_CONQRS:CONQRSMGR;
import PT_CONQRS:SCHED_INFO;

Local PT_CONQRS:CONQRSMGR &cConQrsInst;
Local boolean &result;
Local string &PRCSFILENAME;
Local string &sPrCsName = "PSCONQRS";
Local string &sPrCsType = "Application Engine";
Local number &nOrigPSMessagesMode = %Session.PSMessagesMode;
%Session.PSMessagesMode = 1;

/* While working with connected queries, it is recommended to use a try- */
/* catch block                                                         */

try
    /* Create and open an object. System tries to find a connected query */
    /* with private ownership first for current user. If not found, it   */
    /* uses a public ownership                                           */
    &ConQrsInst = create PT_CONQRS:CONQRSMGR("", PSCONQRS_AET.CONQRSNAME);
    &result = &ConQrsInst.Open(&ConQrsInst.Const.InitExisting);
    &str = &ConQrsInst.ErrString;
    If &str <> "" Then
        WriteToLog(%ApplicationLogFence_Error, &ConQrsInst.ErrString);
        %Session.PSMessagesMode = &nOrigPSMessagesMode;
        Exit (1);
    End-If;
```

```

If &result Then
    /* Get an empty SCHEDINFO structure and populate it. */
    &schedInfo = &ConQrsInst.SchedInfo;
    &schedInfo.DIRLOCATION = %FilePath;
    &schedInfo.OUTDESTTYPE = String(%OutDestType);
    &schedInfo.RUN_CNTL_ID = PSCONQRS_AET.RUN_CNTL_ID;
    &schedInfo.PROCESS_INSTANCE = PSCONQRS_AET.PROCESS_INSTANCE;
    &schedInfo.OPRID = PSCONQRS_AET.OPRID;
    If %OutDestType = 2 Then /* FILE */
        Local string &sqlFile = "SELECT OUTDEST FROM PS_PRCRUNCNTLDTL ⇒
WHERE OPRID=:1 and RUNCNTLID =:2 and PRCSTYPE =:3 and PRCSTYPE =:4";
        SQLExec(&sqlFile, PSCONQRS_AET.OPRID, PSCONQRS_AET.RUN_CNTL_ID, ⇒
&sPrCsType, &sPrCsName, &PRCSFILENAME);
    End-If;
    &schedInfo.PRCSTYPE = &PRCSFILENAME;
    /* Indicate the source of the scheduled request as CQR. */
    &schedInfo.AE_ID = &ConQrsInst.Const.SchedRequest_CQR;
    /* Schedule the query to run. Note that for scheduled connected */
    /* queries, the Prompts parameter is Null. */
    &result = &ConQrsInst.Run( Null, &schedInfo);
End-If;
If &result Then
    %Session.PSMessagesMode = &nOrigPSMessagesMode;
    Exit (0);
Else
    /* Check for errors */
    &str = &ConQrsInst.ErrString;
    If &str <> "" Then
        WriteToLog(%ApplicationLogFence_Error, &ConQrsInst.ErrString);
    End-If;
    /* check session message for errors */
    If %Session.PSMessages.Count > 0 Then
        &PSMessages = %Session.PSMessages;
        For &i = 1 To &PSMessages.Count
            If (&PSMessages.Item(&i).MessageType <= 1) Then
                &MsgSetNbr = &PSMessages.Item(&i).MessageSetNumber;
                &MsgNbr = &PSMessages.Item(&i).MessageNumber;
                WriteToLog(%ApplicationLogFence_Error, MsgGet(&MsgSetNbr, ⇒
&MsgNbr, "Message Not Found : " | &MsgSetNbr | "," | &MsgNbr));
            End-If;
        End-For;
    End-If;
End-If;
%Session.PSMessagesMode = &nOrigPSMessagesMode;
catch Exception &Err
    WriteToLog(%ApplicationLogFence_Error, &Err.ToString());
end-try;

```

Running a Connected Query in Preview Mode or Background Mode

In preview mode, the connected query is run immediately on the application sever. The output data is displayed in a separate browser window. In preview mode, the *Prompts* parameter is required; the *runProcessInfo* parameter *must* be set to Null. The *Prompts* parameter should be retrieved using the *QueriesPromptsArray* property. If this array length is greater than 0, this array must be populated.

Similar to preview mode, running a connected query in background mode results in the output data being displayed in a separate browser window. However, in background mode, the connected query is run through Process Scheduler with a REN server. Running a connected query in this manner prevents blocking on the application server. While the report file is generated, the user can continue working with the PeopleSoft application.

In the following example, assume that an application calls the RunConnectedQuery function with all required parameters. The function returns an error string if any error occurs.

```
import PT_CONQRS:CONQRSMGR;
import PT_CONQRS:QUERYITEMPROMPT;

Function ShowException(&errString As Exception);
    /* Perform exception processing */
End-Function;

Function RunConnectedQuery(&sOprId As string, &sCONQRSNAME As string,
    &RunMode ⇒
As number) Returns string
    Local boolean &result;
    Local array of PT_CONQRS:QUERYITEMPROMPT &aPrompts;
    Local string &str;
    Local number &processID;
    Local boolean &IsChangeDB, &IsNewCnt;
    Local PT_CONQRS:CONQRSMGR &cConQrsInst;
    /* While working with connected queries, it is recommended to use a try- */
    /* catch block */
    try
        /* Create and open an object. System tries to find a connected query */
        /* with private ownership first for current user. If not found, it */
        /* uses a public ownership */
        &cConQrsInst = create PT_CONQRS:CONQRSMGR("", &sCONQRSNAME);
        &result = &cConQrsInst.Open(&cConQrsInst.Const.InitExisting);
        /* Check for errors */
        &str = &cConQrsInst.ErrString;
        If &str <> "" Then
            Error &cConQrsInst.ErrString;
        End-If;
        /* Validate the previously opened connected query object */
        If Not &cConQrsInst.Validate() Then
            &str = &cConQrsInst.ErrString;
            If &str <> "" Then
                Error &cConQrsInst.ErrString;
            End-If;
        End-If;
        /* Preview Mode- AppServer execution */
        /* Populate prompts. NOTE: It is required for 'interactive' execution */
        /* using an application server. In the case of scheduled execution, */
        /* prompts are read from the database */
        If &RunMode = &cConQrsInst.Const.RunMode_Prev Then
            &aPrompts = FillQueriesPrompts();
            If None(&aPrompts) Then
                /* User hit Cancel on a Prompt dialog */
                &cConQrsInst.ResetQueriesPrompt();
                Return &cErrIndicator;
            End-If;
        End-If;
    end try
    Return &str;
End-Function;
```

```

        /* Restrict number of rows being displayed for each member query. */
        /* If user does not set this value, the default number is used */
        If All(PSCONQRS_WRK.QRY_MAX_FETCH) Then
            &cConQrsInst.MaxRowsPerQuery = &numRows;
        Else
            &cConQrsInst.MaxRowsPerQuery = &cConQrsInst.Const.⇒
RunMode_Prev_DefRowNumber;
        End-If;
        /* Run the connected query. NOTE: The runProcessInfo parameter is
Null */
        &result = &cConQrsInst.Run(&aPrompts, Null);
    End-If; /* end of Mode selection */
    /* 'Run to Window' mode */
    If &RunMode = &cConQrsInst.Const.RunMode_Window Then
        &IsChangeDB = True;
        &IsNewCnt = False;
        /* You are required to set run control parameters for immediate */
        /* execution using Process Scheduler */
        &result = &cConQrsInst.SetRunControlData(&cConQrsInst.Const.⇒
RunCntlId_Auto, &IsNewCnt, &IsChangeDB);
        If &result Then
            &processID = &cConQrsInst.RunToWindow();
            If All(&processID) Then
                &result = True;;
            End-If;
        End-If;
    End-If; /* end of Mode selection */
    /* Check for errors */
    &str = &cConQrsInst.ErrString;
    If &str <> "" Then
        Error &cConQrsInst.ErrString;
    End-If;
    Return &str;
catch Exception &Err
    ShowException(&Err);
end-try;
End-Function;

```

Iterating Through a Connected Query Opened for Editing

This example demonstrates usage of the connected query `ObjectRowset` property. The program opens an instance from an existing connected query definition. The program retrieves the rowset from the `ObjectRowset` property, and changes some of its properties. It saves the rowset back to `ObjectRowset` property, and then saves the modified connected query definition back to the database.

```

import PT_CONQRS:CONQRSMGR;

Local PT_CONQRS:CONQRSMGR &cConQrsInst;
Local string &sOprId, &sCONQRSNAME, &str, &sQryParentName, &sQryChildName, ⇒
&sFldNamePar, &sFldNameChild;
Local Rowset &rsObjectRowset, &rsObjectFields;
Local Record &rMapObjRec, &rFldObjRec;
Local number &i, &j, &seqNum, &fldNum;

```



```

Function ShowException(&errString As Exception);
End-Function;

/* While working with connected queries, it is recommended to use a try- */
/* catch block */

try
    /* Create and open an object. System tries to find a connected query */
    /* with private ownership first for current user. If not found, it */
    /* uses a public ownership */
    &sCONQRSNAME = "MyConQuery";
    &cConQrsInst = create PT_CONQRS:CONQRSMGR("", &sCONQRSNAME);
    &res = &cConQrsInst.Open(&cConQrsInst.Const.InitExisting);
    &str = &cConQrsInst.ErrString;
    If &str <> "" Then
        Error &cConQrsInst.ErrString;
    End-If;
    /* Validate the previously opened connected query object */
    If Not &cConQrsInst.Validate() Then
        &str = &cConQrsInst.ErrString;
        If &str <> "" Then
            Error &cConQrsInst.ErrString;
        End-If;
    End-If;
    /* Rowset retrieved from a connected query has the following */
    /* structure: ObjectRowset = CreateRowset(Record.PSCONQRSMAPVW, */
    /* CreateRowset(Record.PSCONQRSFLDRLVW)); */
    &rsObjectRowset = &cConQrsInst.ObjectRowset;
    /* The rowset contains the internal connected query structure. The */
    /* user can iterate the rowset, retrieve and modify member query */
    /* names, list the related fields, list object properties, etc. */
    For &i = 1 To &rsObjectRowset.ActiveRowCount
        &rMapObjRec = &rsObjectRowset(&i).PSCONQRSMAPVW;
        &QryParentName = &rMapRec.GetField(Field.QRYNAMEPARENT).Value;
        &QryChildName = &rMapRec.GetField(Field.QRYNAMECHILD).Value;
        &seqNum = &rsObjectRowset(&i).PSCONQRSMAPVW.SEQNUM.Value;
        &rsObjectFields = &rsObjectRowset(&i).GetRowset(Scroll.PSCONQRSFLDRLVW);
        For &j = 1 To &rsObjectFields.ActiveRowCount
            &rFldObjRec = &rsObjectFields(&j).PSCONQRSFLDRLVW;
            &fldNum = &rFldObjRec.SELCOUNT.Value;
            &sFldNamePar = &rFldObjRec.QRYFLDNAMEPAR.Value;
            &sFldNameChild = &rFldObjRec.QRYFLDNAMECHILD.Value;;
        End-For;
    End-For;
    /* The preceding for loop shows how to navigate a connected query's */
    /* internal structure. It allows a report developer to change a */
    /* connected query definition by modifying existing query members or */
    /* by adding new ones -- queries or related fields. */
    /* Need to set the connected query's rowset to the retrieved rowset */
    /* after any changes are made to the retrieved rowset. */
    &cConQrsInst.ObjectRowset = &rsObjectRowset;

    &Errstr = &cConQrsInst.ErrString;
    If &Errstr <> "" Then
        Error &cConQrsInst.ErrString;
    End-If;

```

```
/* Set the connected query properties. Set the object's status to */
/* active, so it will be available for reporting use */
&cConQrsInst.Description = "My Connected Query";
&cConQrsInst.Details = "Includes QryA, QryA1, and QryC";
&cConQrsInst.Status = "A";
/* Save the connected query instance */
If Not &cConQrsInst.Save() Then
    If &cConQrsInst.ErrString <> "" Then
        Error &cConQrsInst.ErrString;
    End-If;
End-If;
catch Exception &Err
    ShowException(&Err);
end-try;
```

ContentAuthorizorBase Class

Understanding the ContentAuthorizorBase Class

The ContentAuthorizorBase class is under the PTPP_SG application package, and it is to be used as the base class when application developers need to implement their own authentication class. The authentication class should implement the Authorize method, implement authorization logic based on the input parameters, and call the SetResponse method to set the authorization result.

Related Topics

- Portal Technology: Creating Access Control for Files on the Web Server

ContentAuthorizorBase Class Methods

In this section, the ContentAuthorizorBase class methods are presented in alphabetical order.

Authorize method: ContentAuthorizorBase class

Syntax

```
Authorize(&TheStorageGroup, &TheNormalizePath, &TheUserId
```

Description

The Authorize method is an abstract method. Application developers need to implement this method in their own authentication class. You can write authorization logic in this method.

Parameters

Parameter	Description
<i>&TheStorageGroup</i>	Specifies the storage group name as a string value.
<i>&TheNormalizePath</i>	Specifies the normalized folder path as a string value.
<i>&TheUserId</i>	Specifies the user ID as a string value.

Returns

None.

Example

```
import PTPP_SG:ContentAuthorizorBase;
```

```

class ELMAuthClass extends PTPP_SG:ContentAuthorizerBase
    method Authorize(&TheStorageGroup As string, &TheNormalizePath As string,
    &TheUserId As string);
end-class;

method Authorize
    Local string &path, &sgName;
    Local string &userAccess;
    Local string &cmd;
    Local integer &duration = 60;
    &path = &TheNormalizePath;
    &sgName = &TheStorageGroup;
    If (All(&sgName) And
        All(&path)) Then
        SQLExec("select course_access from ps_course_access where
ptpp_sg_name=:1 and course_folder=:2 and course_user=:3", &sgName, &path,
&TheUserId, &userAccess);
    Else
        %Response.Write("Please specify storage group name and path.");
    End-If;
    Evaluate &userAccess
    When = "1"
        &cmd = %This.DENY;
        Break;
    When = "2"
        &cmd = %This.ALLOW_DIRECTORY;
        Break;
    When = "3"
        &cmd = %This.ALLOW_SUBDIR;
        Break;
    When-Other
        &cmd = %This.DENY;
    End-Evaluate;
    %This.SetResponse(&cmd, &duration);
end-method;

```

Related Topics

- [SetResponse method: ContentAuthorizerBase class](#)

SetResponse method: ContentAuthorizerBase class

Syntax

```
SetResponse(&Cmd, &ValidDuration)
```

Description

Use the SetResponse method to set the authorization result and the time duration (in seconds).

Parameters

Parameter	Description
<i>&Cmd</i>	Specifies the authorization result as a fixed string value. - ALLOW_DIRECTORY - the current user is granted authorization for all files in the current requested directory. - ALLOW_SUBDIR - the current user is granted authorization for all files in the current directory and all its sub directories. - DENY - the current request is denied.
<i>&ValidDuration</i>	Specifies the time duration as an integer value. This is an optional parameter. The default value is 300 seconds.

Returns

None.

Example

```
%This.SetResponse(%This.DENY, 60);
```

Related Topics

- [Authorize method: ContentAuthorizerBase class](#)

ContentAuthorizerBase Class Properties

In this section, the ContentAuthorizerBase class properties are presented in alphabetical order.

ALLOW_DIRECTORY property: ContentAuthorizerBase class

Description

Use the ALLOW_DIRECTORY property to set or return a string value representing the authorization granted to the current user for all files in the current requested directory.

This property is read-only.

Example

```
&cmd = %This.ALLOW_DIRECTORY;
```

Related Topics

- [ALLOW_SUBDIR property: ContentAuthorizerBase class](#)
- [DENY property: ContentAuthorizerBase class](#)

ALLOW_SUBDIR property: ContentAuthorizerBase class

Description

Use the ALLOW_SUBDIR property to return a string value representing the authorization granted to the current user for all files in the current directory and all its sub directories.

This property is read-only.

Example

```
&cmd = %This.ALLOW_SUBDIR;
```

Related Topics

- [ALLOW_DIRECTORY property: ContentAuthorizerBase class](#)
- [DENY property: ContentAuthorizerBase class](#)

DENY property: ContentAuthorizerBase class

Description

Use the DENY property to return a string value indicating that the current request is denied.

This property is read-only.

Example

```
&cmd = %This.DENY;
```

Related Topics

- [ALLOW_DIRECTORY property: ContentAuthorizerBase class](#)
- [ALLOW_SUBDIR property: ContentAuthorizerBase class](#)

Crypt Class

Understanding the Crypt Class

The crypt class is used with pluggable cryptography. After you create an encryption profile, use PeopleCode to invoke the encryption profile for encrypting, decrypting, or signing a field, depending on the profile

Related Topics

- Security Administration: Understanding Data Security

Creating a Crypt Object

The crypt class does not have a separate function for instantiating an object (such as CreateCrypt.) Instead, you instantiate a crypt object using the CreateObject function, using the keyword Crypt.

```
&cry = CreateObject("Crypt");
```

See PeopleCode Language Reference: CreateObject function.

Declaring Crypt Objects

Crypt objects are declared by using the Crypt type name.

```
Local Crypt &MyCrypt;
```

Note

Crypt objects cannot be serialized, and so can only be declared as Local.

Scope of a Crypt Object

A crypt object can only be instantiated from PeopleCode. This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

Crypt Class Methods

In this section, we discuss the crypt class methods. The methods are discussed in alphabetical order.

FirstStep method: Crypt class

Syntax

```
FirstStep()
```

Description

Use the FirstStep method to access the first step in the encryption chain.

You must use either the FirstStep or GoToStep methods before you use the NextStep or SetParameter methods.

Parameters

None.

Returns

None.

Related Topics

- [GoToStep method: Crypt class](#)
- [NextStep method: Crypt class](#)
- [SetParameter method: Crypt class](#)

GoToStep method: Crypt class

Syntax

```
GoToStep(StepNum)
```

Description

Use the GoToStep method to access a specific step in the encryption chain.

You must use either the GoToStep or FirstStep methods before you use the NextStep or SetParameter method.

Parameters

Parameter	Description
<i>StepNum</i>	Specify the step number that you want to access, as a number.

Returns

None.

Related Topics

- [FirstStep method: Crypt class](#)
- [NextStep method: Crypt class](#)

- [SetParameter method: Crypt class](#)

LoadLibrary method: Crypt class

Syntax

`LoadLibrary(LibraryFile, LibraryID)`

Description

Use the LoadLibrary method to specify the encryption library to be used. This method is generally used when either your underlying library changes (such as, a new version, added algorithms, and so on) or you have your written own library and you need to load the metadata into the PeopleSoft system.

Parameters

Parameter	Description
<i>LibraryFile</i>	Specify the name of the file containing the encryption library as a string. You do not have to specify a full path name. The delivered OpenSSL library is pspetssl.dll. The delivered PGP library is pspetpgp.dll.
<i>LibraryID</i>	Specify the name of the library, as a string.

Returns

None.

NextStep method: Crypt class

Syntax

`NextStep()`

Description

Use the NextStep method to access the next step in the encryption chain.

You must use the FirstStep or GoToStep method before using NextStep.

Your program terminates if you call NextStep when you are already at the last step in the encryption chain.

Parameters

None.

Returns

None.

Related Topics

- [FirstStep method: Crypt class](#)

- [GoToStep method: Crypt class](#)

Open method: Crypt class

Syntax

`Open(ProfileName, Mode)`

Description

Use the Open method to open the encryption profile identified by *ProfileName*. You must open an encryption profile before you can add data to the encryption profile. Your program terminates if you specify an encryption profile that doesn't exist.

Parameters

Parameter	Description
<i>ProfileName</i>	Specify the name of the encryption profile you want to access, as a string. You can store the name of the encryption profile in a field, and specify a <i>fieldname.recordname</i> .
<i>Mode</i>	This parameter is optional. Use this parameter to specify whether the profile is run in test mode or non-test mode. Enter True for test mode; False for non-test mode. The default value for this parameter is False. When the encryption profile is run in non-test mode, the profile is locked and cannot be modified.

Returns

None.

Example

```
Local Crypt &cry;

&cry = CreateObject("Crypt");
&bar = QE_CRYPT_WRK.CRYPT_PRFL_ID;
&cry.Open(&bar);
&cry.UpdateData(QE_CRYPT_WRK.DESCRLONG);
QE_CRYPT_WRK.LARGECHAR = &cry.Result;
```

SetParameter method: Crypt class

Syntax

`SetParameter(Name, Value)`

Description

Use the SetParameter method to set the parameter specified by *Name* to a value specified by *Value*.

You must have already used the FirstStep, NextStep, or GoToStep methods to specify a step before using this method.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the parameter that you want to change, as a string.
<i>Value</i>	Specify the value for the parameter that you want to change.

Returns

None.

Related Topics

- [FirstStep method: Crypt class](#)
- [GoToStep method: Crypt class](#)
- [NextStep method: Crypt class](#)

UpdateData method: Crypt class

Syntax

UpdateData(*Data*)

Description

Use the UpdateData method to add data to the encryption chain. This method can be called multiple times after opening a profile to add data.

Parameters

Parameter	Description
<i>Data</i>	Specify the data you want to add to the encryption chain, as a string.

Returns

None.

Crypt Class Properties

This section describes the crypt class properties. The properties are described in alphabetical order.

AuthTag property: Crypt class

Description

In CCM and GCM modes of AES encryption, the encryption program produces an authentication tag (a string value for the AuthTag property) in addition to the encrypted text. Authentication tag is used to verify the integrity of data. The decryption program takes the value of the AuthTag property as a parameter.

Note

When you supply the string value of the AuthTag property as a parameter for the decryption program, you must prefix the value with 0x (zero x).

This property is read-only.

Related Topics

- Security Administration: OpenSSL Algorithms

Result property: Crypt class

Description

After updating the encryption chain, the Result property contains the end result of the encryption chain. Once the result has been retrieved, it is no longer possible to update the object anymore.

This property is read-only.

Verified property: Crypt class

Description

For algorithms that check a signature, the system sets the Verified property to true if the signature is valid, and false if the signature is invalid. For algorithms that do not check a signature, it always returns false.

This property is read-only.

Crypt Class Example

The following examples display the use of some Crypt class methods and properties.

An example of encryption program:

```
&EncryptProfile = "<ENCRYPTPRFL>";
&Encrypt = CreateObject("Crypt");
&Encrypt.Open(&EncryptProfile);
/* If desired you can override any of the Profile Parameters.
Should only be needed if Random IV, KEY, AAD, AUTHTAG are
used during Encryption. You must uncomment and
```

```

set GoToStep if you uncomment any SetParameter */
rem  &Encrypt.GoToStep(n); /* Change n to Step number in encryption chain */
rem  &Encrypt.SetParameter('IV', '<hex IV used during Encryption>');
rem  &Encrypt.SetParameter('SYMMETRICKEY', '<keyset entry name used during
Encryption>');
rem  &Encrypt.SetParameter('AAD', '<AAD value used during Encryption>');
/* Refer to the Documentation for Parameter Names and Values for the non-
symmetric algorithms */
rem  &Encrypt.SetParameter('<PARMNAME>', '<PARMVALUE>');
&Encrypt.UpdateData(&rec.<FIELDNAME>.Value);
&EncryptResult = &Encrypt.Result;
rem &Verify = &Encrypt.Verify; /* Used when running Verify routine */
rem &AuthTag = &Encrypt.AuthTag; /* Produced from AES CCM and GCM modes -
required for decryption */

```

An example of decryption program:

```

&DecryptProfile = "<DECRYPTPRFL>";
&Decrypt = CreateObject("Crypt");
&Decrypt.Open(&DecryptProfile);
/* If desired you can override any of the Profile Parameters.
Should only be needed if Random IV, KEY, AAD, AUTHTAG were
used/produced during Encryption. You must uncomment and
set GoToStep if you uncomment any SetParameter */
rem  &Decrypt.GoToStep(n); /* Change n to Step number in decryption chain */
rem  &Decrypt.SetParameter('IV', '<hex IV used during Encryption>');
rem  &Decrypt.SetParameter('SYMMETRICKEY', '<keyset entry name used during
Encryption>');
rem  &Decrypt.SetParameter('AUTHTAG', '<hex AuthTag produced during
Encryption>');
rem  &Decrypt.SetParameter('AAD', '<AAD value used during Encryption>');
/* Refer to the Documentation for Parameter Names and Values
for the non-symmetric algorithms */
rem  &Decrypt.SetParameter('<PARMNAME>', '<PARMVALUE>');
&Decrypt.UpdateData(&EncryptResult);
&DecryptResult = &Decrypt.Result;

```

Document Classes

Understanding the Document Classes

A PeopleSoft document is a managed object that has two representations. The logical document depicts the document's structure. The physical document is the rendering of the document in a specific format—either in XML or as a relational record (or records).

PeopleCode provides document classes that contain built-in functions and methods that enable you to populate data into and retrieve data from logical documents. However, you should already have knowledge of the logical document structure in order to effectively write PeopleCode to work with a specific document.

Related Topics

- Documents Technology: PeopleSoft Documents Technology Overview

Data Type and Scope of the Document Classes

Every document class is its own data type—that is, documents are declared as the Document data type, primitive objects are declared as the Primitive type, and so on. For example:

```
Local Document &Doc;
```

The following are the data types of the document classes:

- Document
- DocumentKey
- Primitive
- Compound
- Collection

Document objects can only be instantiated from PeopleCode. These objects can be used anywhere you have PeopleCode—that is, in Component Interface PeopleCode, record field PeopleCode, Application Engine PeopleCode, and so on.

Document Classes Built-in Functions

PeopleCode Language Reference: CreateDocument function

PeopleCode Language Reference: CreateDocumentKey function

Document Class

This section provides an overview of the Document class and discusses:

- Document class methods.

- Document class properties.

The Document class provides the ability to manipulate a PeopleSoft document as a Document object.

Document Class Methods

In this section, the Document class methods are presented in alphabetical order.

GenJsonString method: Document class

Syntax

```
GenJsonString()
```

Description

Use the GenJsonString method to generate a JSON (JavaScript Object Notation) structure from the Document object.

Parameters

None.

Returns

A String value.

Example

```
Local Document &DOC;  
Local string &JSONdata;  
  
&JSONdata = &DOC.GenJsonString();  
&b_ret = &DOC.ParseJsonString(&JSONdata, False);
```

Related Topics

- [ParseJsonString method: Document class](#)
- Documents Technology: Managing JSON-Formatted Documents

GenXmlString method: Document class

Syntax

```
GenXmlString([validate])
```

Description

Use this method to generate an XML string representing the logical document populated with data.

Note

The Generate button on the Document Tester page uses this method to generate a test XML document.

Parameters

Parameter	Description
<i>validate</i>	Specifies a Boolean value indicating whether to validate the XML document before it is generated.

Returns

An XML string.

Related Topics

- Documents Technology: Generating and Viewing Test Documents

GetDocumentKey method: Document class

Syntax

```
GetDocumentKey()
```

Description

Use this method to generate the document keys for the document as a DocumentKey object.

Parameters

None.

Returns

A DocumentKey object.

Example

```
Local Document &Doc;  
  
&Doc = CreateDocument("Purchasing", "PurchaseOrder", "v1");  
&DocKey = &Doc.GetDocumentKey();
```

Related Topics

- [DocumentKey Class](#)
This section provides an overview of the DocumentKey class and discusses:

GetElement method: Document class

Syntax

`GetElement(ElementName)`

Description

Use this method to retrieve a document element by name. The object returned will be a Collection, Compound, or Primitive object.

Note

Use the object's `ElementType` property to determine which object type is returned.

Parameters

Parameter	Description
<i>ElementName</i>	Specifies the name of the document element as a string.

Returns

A Collection object, a Compound object, or a Primitive object.

Example

```
&Doc = CreateDocument(&DocKey);
&DocElem = &Doc.GetElement("BillTo");

Evaluate &DocElem.ElementType

When = %Document_Compound
...

When = %Document_Collection
...

When = %Document_Primitive
...

When-Other
  Error ...

End-Evaluate;
```

Related Topics

- [ElementType property: Collection class](#)
- [ElementType property: Compound class](#)

- [ElementType property: Primitive class](#)

GetRowset method: Document class

Syntax

```
GetRowset()
```

Description

Use this method to generate a standalone rowset for a relational-formatted document. The structure of the rowset matches the structure of the record mapped to the document. If the document is populated with data when GetRowset is called, then the rowset is populated with that data; otherwise, the rowset is empty.

Parameters

None.

Returns

A Rowset object.

Example

```
Local Document &Doc;  
Local Rowset &Doc_RS;  
  
&Doc = CreateDocument(&DocKey);  
&Doc_RS = &Doc.GetRowset();
```

Related Topics

- [UpdateFromRowset method: Document class](#)
- [Understanding Rowset Class](#)
A rowset object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

GetSchema method: Document class

Syntax

```
GetSchema()
```

Description

Use this method to generate the XML schema definition for the document.

Parameters

None.

Returns

A string containing the XML schema definition.

Example

```
Local Document &Doc;  
Local DocumentKey &DocKey;  
  
&DocKey = CreateDocumentKey("Purchasing", "PurchaseOrder", "v1");  
&Doc = CreateDocument(&DocKey);  
&str = &Doc.GetSchema();
```

ParseJsonString method: Document class

Syntax

```
ParseJsonString(JSON_data [, validate])
```

Description

Use the ParseJsonString method to generate a document from the JSON data provided as string.

Parameters

Parameter	Description
<i>JSON_data</i>	Specifies the JSON data as a string.
<i>validate</i>	Specifies a Boolean value indicating whether to validate the JSON data based on the XML schema.

Returns

A Boolean value: True if a document (or a valid document) was generated, False otherwise.

Example

```
Local Document &DOC;  
Local string &JSONdata;  
  
&string = &DOC.GenJsonString();  
&b_ret = &DOC.ParseJsonString(&JSONdata, True);
```

Related Topics

- [GenJsonString method: Document class](#)
- Documents Technology: Managing JSON-Formatted Documents

ParseXmlFromFile method: Document class

Syntax

```
ParseXmlFromFile(file_name [, validate])
```

Description

Use this method to generate a document from the XML schema definition provided in a file.

Parameters

Parameter	Description
<i>file_name</i>	Specifies the name of the file as a string.
<i>validate</i>	Specifies a Boolean value indicating whether to validate the XML document as it is generated.

Returns

A Boolean value: True if a document (or a valid document) was generated, False otherwise.

Related Topics

- [ParseXmlFromURL method: Document class](#)
- [ParseXmlString method: Document class](#)

ParseXmlFromURL method: Document class

Syntax

```
ParseXmlFromURL(URL [, validate])
```

Description

Use this method to generate a document from the XML schema definition provided at the specified URL.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL as a string.
<i>validate</i>	Specifies a Boolean value indicating whether to validate the XML document as it is generated.

Returns

A Boolean value: True if a document (or a valid document) was generated, False otherwise.

Related Topics

- [ParseXmlFromFile method: Document class](#)
- [ParseXmlString method: Document class](#)

ParseXmlString method: Document class

Syntax

```
ParseXmlString(XML_string [, validate])
```

Description

Use this method to generate a document from the XML schema definition provided as an XML string.

Parameters

Parameter	Description
<i>XML_string</i>	Specifies the XML as a string.
<i>validate</i>	Specifies a Boolean value indicating whether to validate the XML document as it is generated.

Returns

A Boolean value: True if a document (or a valid document) was generated, False otherwise.

Related Topics

- [ParseXmlFromFile method: Document class](#)
- [ParseXmlFromURL method: Document class](#)

UpdateFromRowset method: Document class

Syntax

```
UpdateFromRowset(&Doc_RS)
```

Description

Use this method to update the document data with data from a stand-alone rowset.



Important

Any existing data in the document is erased and replaced by the data from the rowset.

Parameters

Parameter	Description
<i>&Doc_RS</i>	Specifies the stand-alone rowset as a Rowset object.

Returns

A Boolean value: True if the update was successful, False otherwise.

Related Topics

- [GetRowset method: Document class](#)
- [Understanding Rowset Class](#)

A rowset object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

ValidateData method: Document class

Syntax

```
ValidateData()
```

Description

Use this method to validate the data in a document.

Parameters

None.

Returns

A Boolean value: True if the document data is valid, False otherwise.

Document Class Properties

In this section, the Document class properties are presented in alphabetical order.

DocumentElement property: Document class

Description

Use this property to return the root element for this document as a Compound object.

This property is read-only.

Example

```
Local Document &Doc;  
Local DocumentKey &DocKey;  
Local Compound &Root  
/* Instatiate the Document object */  
&DocKey = CreateDocumentKey("Purchasing", "PurchaseOrder", "v1");  
&Doc = CreateDocument(&DocKey);  
  
&Root = &Doc.DocumentElement;
```

Related Topics

- [Compound Class](#)
This section provides an overview of the Compound class and discusses:

DocumentKey Class

This section provides an overview of the DocumentKey class and discusses:

- DocumentKey class methods.
- DocumentKey class properties.

The DocumentKey class provides the ability to pass a document's keys as a single object.

DocumentKey Class Methods

In this section, the DocumentKey class methods are presented in alphabetical order.

SetDocumentKey method: DocumentKey class

Syntax

```
SetDocumentKey(Package, DocumentName, Version)
```

Description

Use this method to change the document keys for a DocumentKey object.

Parameters

Parameter	Description
<i>Package</i>	Specifies a document package as a string.
<i>DocumentName</i>	Specifies the name of the document as a string. Note: The document name also becomes the root element name for the document.
<i>Version</i>	Specifies the document version as a string.

Returns

A Boolean value: True if the document keys were set successfully, False otherwise.

Example

```
Local Document &Doc;  
Local DocumentKey &DocKey;  
  
/* Instantiate the Document object */  
&DocKey = CreateDocumentKey("Purchasing", "PurchaseOrder", "v1");  
  
...
```

```
&ret = &DocKey.SetDocumentKey("Purchasing", "PurchaseOrder", "v1.1");  
&Doc = CreateDocument(&DocKey);
```

Related Topics

- PeopleCode Language Reference: CreateDocumentKey function

DocumentKey Class Properties

In this section, the DocumentKey class properties are presented in alphabetical order.

DocumentName property: DocumentKey class

Description

Use this property to return the document name from the document keys as a string.

This property is read-only.

GetDocumentName property: DocumentKey class

Description**Note**

This property has been desupported and remains for backward compatibility only. Use the DocumentName property instead.

Use this property to return the document name from the document keys as a string.

This property is read-only.

Related Topics

- [DocumentName property: DocumentKey class](#)

GetVersion property: DocumentKey class

Description**Note**

This property has been desupported and remains for backward compatibility only. Use the Version property instead.

Use this property to return the version from the document keys as a string.

This property is read-only.

Related Topics

- [Version property: DocumentKey class](#)

PackageName property: DocumentKey class

Description

Use this property to return the package name from the document keys as a string.

This property is read-only.

Version property: DocumentKey class

Description

Use this property to return the version from the document keys as a string.

This property is read-only.

Primitive Class

This section provides an overview of the Primitive class and discusses:

- Primitive class methods.
- Primitive class properties.

The Primitive class provides the ability to work with a primitive document element.

Primitive Class Methods

In this section, the Primitive class methods are presented in alphabetical order.

GetEnumName method: Primitive class

Syntax

```
GetEnumName(index)
```

Description

Use this method to return the name of the enumerated value.

Parameters

Parameter	Description
<i>index</i>	Specifies the index of the enumerated value.

Returns

A string representing the enumerated value.

Related Topics

- [EnumCount property: Primitive class](#)

GetParent method: Primitive class

Syntax

```
GetParent()
```

Description

Use this method to return the parent object of the primitive element.

Parameters

None.

Returns

A Collection object or a Compound object.

Related Topics

- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:

GetPath method: Primitive class

Syntax

```
GetPath()
```

Description

Use this method to return the absolute path to the primitive within the document's structure.

For example, for the Name primitive of the ShipTo compound of the PurchaseOrder document, GetPath would return the following absolute path:

```
PurchaseOrder/ShipTo/Name
```

Parameters

None.

Returns

A string representing the absolute path to the primitive.

Primitive Class Properties

In this section, the Primitive class properties are presented in alphabetical order.

ElementType property: Primitive class

Description

Use this property to return the type of this document element as an integer constant:
`%Document_Primitive`,

This property is read-only.

EnumCount property: Primitive class

Description

Use this property to return the number of enumerated values for this primitive element as an integer.

This property is read-only.

Related Topics

- [GetEnumName method: Primitive class](#)

IsChanged property: Primitive class

Description

Use this property to return a Boolean value indicating whether the value of this primitive element has been changed.

This property is read-only.

Related Topics

- [OrigValue property: Primitive class](#)
- [Value property: Primitive class](#)

IsInitialized property: Primitive class

Description

Use this property to return a Boolean value indicating whether this primitive element has an initial value.

This property is read-only.

Related Topics

- [OrigValue property: Primitive class](#)
- [Value property: Primitive class](#)

IsRequired property: Primitive class

Description

Use this property return a Boolean value indicating whether this primitive element is required.

This property is read-only.

MaxDefinedDecimalLength property: Primitive class

Description

Use this property to return the number of allowed spaces to the right of the decimal point as an integer.

Note

This property is available and valid for a decimal primitive type only.

This property is read-only.

Related Topics

- [MaxDefinedLength property: Primitive class](#)
- [PrimitiveType property: Primitive class](#)

MaxDefinedLength property: Primitive class

Description

Use this property to return the length of the primitive element as an integer.

This property is read-only.

Related Topics

- [MaxDefinedDecimalLength property: Primitive class](#)

Name property: Primitive class

Description

Use this property to return the name of this element as a string.

This property is read-only.

OrigValue property: Primitive class

Description

Use this property to set or return the original value for this element as a string.

This property is read/write.

Related Topics

- [IsChanged property: Primitive class](#)
- [IsInitialized property: Primitive class](#)
- [Value property: Primitive class](#)

PrimitiveSubType property: Primitive class

Description

Use this property to return the subtype for this primitive element as an integer. Only certain primitive types have defined subtypes.

For the %Document_Integer primitive type, the values are:

Numeric Value	Constant Value	Description
—	<i>none</i>	No subtype (default).
1	%DocumentSubType_NonNegInteger	Non-negative integer

For the %Document_String and %Document_Text primitive types, the values are:

Numeric Value	Constant Value	Description
—	<i>none</i>	No subtype (default).
1	%DocumentSubType_AnyURI	any URI XML schema data type.
5	%DocumentSubType_gDay	gDay XML schema data type.
6	%DocumentSubType_gMonth	gMonth XML schema data type.
7	%DocumentSubType_gYear	gYear XML schema data type.
8	%DocumentSubType_gYearMonth	gYearMonth XML schema data type.
2	%DocumentSubType_NormString	Normalized string XML schema data type.
4	%DocumentSubType_QName	QName XML schema data type.
3	%DocumentSubType_Token	Token XML schema data type.

This property is read-only.

Related Topics

- [PrimitiveType property: Primitive class](#)

PrimitiveType property: Primitive class

Description

Use this property to return the type for this primitive element as an integer. The values are:

Numeric Value	Constant Value	Description
11	%Document_Binary	Binary primitive type.
1	%Document_Boolean	Boolean primitive type.
2	%Document_Char	Character primitive type. The Character primitive type allows a single-character string only.

Numeric Value	Constant Value	Description
7	%Document_Date	Date primitive type.
9	%Document_DateTime	DateTime primitive type.
6	%Document_Decimal	Decimal primitive type.
4	%Document_Integer	Integer primitive type. The Integer primitive type includes subtypes.
3	%Document_String	String primitive type. The String primitive type requires a length. The String primitive type also includes subtypes.
10	%Document_Text	Text primitive type. The Text primitive type is unbounded and does not require a length. The Text primitive type also includes subtypes.
8	%Document_Time	Time primitive type.

This property is read-only.

Related Topics

- [PrimitiveSubType property: Primitive class](#)

SequenceNumber property: Primitive class

Description

Use this property to return the system-assigned sequence number for this element as an integer.

This property is read-only.

Value property: Primitive class

Description

Use this property to set or return the value for this primitive element as a string.

This property is read/write.

Related Topics

- [IsChanged property: Primitive class](#)
- [IsInitialized property: Primitive class](#)
- [OrigValue property: Primitive class](#)

Compound Class

This section provides an overview of the Compound class and discusses:

- Compound class methods.
- Compound class properties.

The Compound class provides the ability to work with a compound document element.

Compound Class Methods

In this section, the Compound class methods are presented in alphabetical order.

Clear method: Compound class

Syntax

```
Clear()
```

Description

Use the Clear method to reset all of the primitives of the Compound object as follows:

- Boolean primitives: False
- Decimal and integer primitives: 0
- String primitives: An empty string

Parameters

None.

Returns

A Boolean value: True if the method executed successfully, False otherwise.

Example

```
&Document = &Map.GetDocument();  
&COM = &Document.DocumentElement;  
&bRet = &COM.Clear();
```

Related Topics

- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:

GetParent method: Compound class

Syntax

```
GetParent()
```

Description

Use this method to return the parent object of the compound element.

Parameters

None.

Returns

A Collection object or a Compound object.

Related Topics

- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:

GetPath method: Compound class

Syntax

```
GetPath()
```

Description

Use this method to return the absolute path to the compound element within the document's structure.

For example, for the Items compound of the PurchaseOrder document, GetPath would return the following absolute path:

```
PurchaseOrder/Item_Collection/Items
```

Parameters

None.

Returns

A string representing the absolute path to the compound element.

GetPropertyByIndex method: Compound class

Syntax

```
GetPropertyByIndex(index)
```

Description

Use this method to return a property of the compound element as an object.

Parameters

None.

Parameter	Description
<i>index</i>	Specifies the index number of the property as an integer.

Returns

A Collection object, a Compound object, or a Primitive object.

Related Topics

- [GetPropertyByName method: Compound class](#)
- [PropertyCount property: Compound class](#)
- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:
- [Primitive Class](#)
This section provides an overview of the Primitive class and discusses:

GetPropertyByName method: Compound class

Syntax

```
GetPropertyByName(prop_name)
```

Description

Use this method to return a property of the compound element as an object.

Parameters

Parameter	Description
<i>prop_name</i>	Specifies the name of the property as a string.

Returns

A Collection object, a Compound object, or a Primitive object.

Related Topics

- [GetPropertyByIndex method: Compound class](#)
- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:
- [Primitive Class](#)
This section provides an overview of the Primitive class and discusses:

GetUniqueKey method: Compound class

Syntax

```
GetUniqueKey()
```

Description

Use this method to return the key information for this compound—that is, the package name, document name, and document version.

Parameters

None.

Returns

An array of string with three elements: package name, document name, and document version.

Compound Class Properties

In this section, the Compound class properties are presented in alphabetical order.

ElementType property: Compound class

Description

Use this property to return the type of this document element as an integer constant: %Document_Compound.

This property is read-only.

IsChanged property: Compound class

Description

Use this property to return a Boolean value indicating whether this compound element has been changed.

This property is read-only.

IsInitialized property: Compound class

Description

Use this property to return a Boolean value indicating whether this compound element included initial data when the document was loaded from the XML source.

This property is read-only.

IsRequired property: Compound class

Description

Use this property return a Boolean value indicating whether this compound element is required.

This property is read-only.

Name property: Compound class

Description

Use this property to return the name of this element as a string.

This property is read-only.

PropertyCount property: Compound class

Description

Use this property to return the number of existing properties for this compound element as an integer.

This property is read-only.

Related Topics

- [GetPropertyByIndex method: Compound class](#)

SequenceNumber property: Compound class

Description

Use this property to return the system-assigned sequence number for this element as an integer.

This property is read-only.

Collection Class

This section provides an overview of the Collection class and discusses:

- Collection class methods.
- Collection class properties.

The Collection class provides the ability to work with a collection document element.

Collection Class Methods

In this section, the Collection class methods are presented in alphabetical order.

AppendItem method: Collection class

Syntax

```
AppendItem(&Elem)
```

Description

Use this method to append an element as the last element of the collection. The item must be instantiated first by using the CreateItem method.

Parameters

Parameter	Description
<i>&Elem</i>	Specifies the element to be appended as an object: a Collection object, a Compound object, or a Primitive object.

Returns

A Boolean value: True if the append was completed successfully, False otherwise.

Example

The following example demonstrates how to use Collection and Compound methods to create, populate, and append a compound item within a collection:

```
Local DocumentKey &DOCKEY;  
Local Document &DOC;  
Local Compound &COM, &Com_Rdr;  
Local Collection &Coll_Rdr;  
Local Primitive &PRIM;  
  
&DOCKEY = CreateDocumentKey("FlightStatus", "FlightData", "v1");  
&DOC = CreateDocument(&DOCKEY);  
  
&COM = &DOC.DocumentElement;  
  
&Coll_Rdr = &COM.GetPropertyByName("RdrCollection");  
  
&Com_Rdr = &Coll_Rdr.CreateItem();  
  
&PRIM = &Com_Rdr.GetPropertyByName("QE_ACNUMBER");  
&PRIM.Value = 105;  
&PRIM = &Com_Rdr.GetPropertyByName("QE_AZIMUTH");  
&PRIM.Value = "40";  
&PRIM = &Com_Rdr.GetPropertyByIndex(3);  
&PRIM.Value = "4B";  
  
&nRet = &Coll_Rdr.AppendItem(&Com_Rdr);
```

Related Topics

- [CreateItem method: Collection class](#)

- [CollectionElementType property: Collection class](#)

CreateItem method: Collection class

Syntax

```
CreateItem()
```

Description

Use this method to instantiate an empty object for this collection as defined by the `CollectionElementType` property.

Parameters

None.

Returns

A Collection object, a Compound object, or a Primitive object as defined by the `CollectionElementType` property.

Related Topics

- [AppendItem method: Collection class](#)
- [InsertItem method: Collection class](#)
- [CollectionElementType property: Collection class](#)

DeleteItem method: Collection class

Syntax

```
DeleteItem(index)
```

Description

Use this method to delete the specified element from the collection.

Parameters

Parameter	Description
<i>index</i>	Specifies the sequence number of the element to be deleted as an integer.

Returns

A Boolean value: True if the delete was successful, False otherwise.

GetItem method: Collection class

Syntax

GetItem(*index*)

Description

Use this method to return the specified element from the collection.

Parameters

Parameter	Description
<i>index</i>	Specifies the sequence number of the element to be retrieved as an integer.

Returns

A Collection object, a Compound object, or a Primitive object as defined by the CollectionElementType property.

Related Topics

- [CollectionElementType property: Collection class](#)

GetParent method: Collection class

Syntax

GetParent()

Description

Use this method to return the parent object of the collection element.

Parameters

None.

Returns

A Collection object or a Compound object.

Related Topics

- [Collection Class](#)
This section provides an overview of the Collection class and discusses:
- [Compound Class](#)
This section provides an overview of the Compound class and discusses:

GetPath method: Collection class

Syntax

```
GetPath()
```

Description

Use this method to return the absolute path to the collection element within the document's structure.

For example, for the `Item_Collection` collection of the `PurchaseOrder` document, `GetPath` would return the following absolute path:

```
PurchaseOrder/Item_Collection
```

Parameters

None.

Returns

A string representing the absolute path to the collection element.

InsertItem method: Collection class

Syntax

```
InsertItem(&Elem, index)
```

Description

Use this method to insert an element at the specified location in the collection. The item must be instantiated first by using the `CreateItem` method.

Parameters

Parameter	Description
<i>&Elem</i>	Specifies the element to be inserted as an object: a Collection object, a Compound object, or a Primitive object.
<i>index</i>	Specifies the sequence number for the element to be inserted as an integer.

Returns

A Boolean value : True if the insertion was completed successfully, False otherwise.

Example

For example, for a collection with four items (a, b, c, d), the following call to insert item f would result in a collection with five items (a, f, b, c, d):

```
&ret = &Coll.InsertItem(&f, 2);
```

Related Topics

- [CreateItem method: Collection class](#)
- [CollectionElementType property: Collection class](#)

Collection Class Properties

In this section, the Collection class properties are presented in alphabetical order.

CollectionElementType property: Collection class

Description

Use this property to return the element type for the collection items as an integer constant. The values are:

Numeric Value	Constant Value	Description
2	%Document_Collection	A Collection object.
1	%Document_Compound	A compound object.
0	%Document_Primitive	A primitive object.

This property is read-only.

Count property: Collection class

Description

Use this property to return the count of items in the collection as an integer.

This property is read-only.

DefinedMaxOccurs property: Collection class

Description

Use this property to return an integer indicating the maximum number of items in the collection. The integer constant %Document_OccursUnbounded indicates that there is no maximum.

This property is read-only.

DefinedMinOccurs property: Collection class

Description

Use this property to return an integer indicating the minimum number of items in the collection.

This property is read-only.

ElementType property: Collection class

Description

Use this property to return the type of this document element as an integer constant:
%Document_Collection.

This property is read-only.

IsChanged property: Collection class

Description

Use this property to return a Boolean value indicating whether this collection element has been changed.

This property is read-only.

IsInitialized property: Collection class

Description

Use this property to return a Boolean value indicating whether this collection included initial data when the document was loaded from the XML source.

This property is read-only.

IsRequired property: Collection class

Description

Use this property return a Boolean value indicating whether this collection element is required.

This property is read-only.

Name property: Collection class

Description

Use this property to return the name of this element as a string.

This property is read-only.

SequenceNumber property: Collection class

Description

Use this property to return the system-assigned sequence number for this element as an integer.

This property is read-only.

Drop Zone Configuration Classes

Understanding the Drop Zone Configuration Classes

Use the drop zone configuration classes of the PTCS_DROPZONE application package to manage the configuration of drop zones. A drop zone is special group box that is placed on a page definition in Application Designer. PeopleSoft application teams (PeopleSoft HCM, PeopleSoft FSCM, and so on) have already added drop zones to main pages, to subpages at any nesting level, and to secondary pages as is appropriate for components and pages delivered by that application pillar.

Then, you create custom subpage definitions to be associated with these drop zones. Typically, you then associate your subpages to one or more drop zones using the Configure Drop Zones component in the browser.

With the PTCS_DROPZONE application package, you can programmatically manage these associations of subpages to drop zones, such as creating new drop zone configurations, and updating and deleting existing configurations.

Related Topics

- [Application Designer Developer's Guide: Configuring Drop Zones](#)

DZComponentConfig Class

Use the PTCS_DROPZONE:DZComponentConfig class to maintain drop zone configurations for a specific component. Use the methods and properties of this class to add, update, and remove drop zone configurations for the specified component.

Use the [DZComponentConfig method: DZComponentConfig class](#) constructor method to instantiate an object of this class.

Related Topics

- [DZComponentConfig Methods](#)
In this section, the DZComponentConfig class methods are presented in alphabetical order.
- [DZComponentConfig Properties](#)
In this section, the DZComponentConfig class properties are presented in alphabetical order.

DZContent Class

Use the PTCS_DROPZONE:DZContent class to ascertain all of the components system wide where a specific subpage has been configured.

Use the [DZContent method: DZContent class](#) constructor method to instantiate an object of this class.

Related Topics

- [DZContent Methods](#)

In this section, the DZContent class methods are presented in alphabetical order.

DZConfig Class

Use the PTCS_DROPZONE:DZConfig class to manage a specific drop zone within a component. Use the methods of this class to update, save, or delete configuration for the drop zone.

Use the [AddConfig method: DZComponentConfig class](#) method of the DZComponentConfig class to instantiate a new object of the DZConfig class. Additionally, [GetConfigurationsForComponent method: DZComponentConfig class](#), [GetConfigurationsForPage method: DZComponentConfig class](#), [GetConfigurationsForPagefield method: DZComponentConfig class](#), and [GetConfigurationsForSubpage method: DZComponentConfig class](#) of the DZComponentConfig class populate the arrDZInfo property with an array of DZConfig objects.

Related Topics

- [DZConfig Methods](#)

In this section, the DZConfig class methods are presented in alphabetical order.

- [DZConfig Properties](#)

In this section, the DZConfig class properties are presented in alphabetical order.

DZPage Class

Use the PTCS_DROPZONE:DZPage class to return drop zone configurations for a specific main page (including any of its subpages), secondary page, or page field.

Use the [DZPage method: DZPage class](#) constructor method to instantiate an object of this class.

Related Topics

- [DZPage Methods](#)

In this section, the DZPage class methods are presented in alphabetical order.

DZComponentConfig Methods

In this section, the DZComponentConfig class methods are presented in alphabetical order.

AddConfig method: DZComponentConfig class

Syntax

```
AddConfig(PAGE_NAME, FldTabOrder)
```

Description

Use the AddConfig method to instantiate a DZConfig object to add a new drop zone configuration or to retrieve an existing configuration for a drop zone group box. Subsequently, use the SetSubpageName and then the Save methods of the DZConfig object to associate a subpage to this drop zone and save the configuration.

Parameters

Parameter	Description
<i>PAGE_NAME</i>	Specifies a string value representing the name of a <i>main</i> page, a nested subpage, or a secondary page that contains a valid drop zone group box. Note: To be valid, the page containing the valid drop zone group box must be definitional linked to the component that is associated with this DZComponentConfig object.
<i>FldTabOrder</i>	Specifies the page field tab order for the group box as a string value.

Returns

A DZConfig object.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
Local PTCS_DROPZONE:DZConfig &dzConfig =  
&dzCompConfig.AddConfig("EX_SHEET_HDR_FL", "2");
```

Related Topics

- [SetSubpageName method: DZConfig class](#)
- [Save method: DZConfig class](#)

DZComponentConfig method: DZComponentConfig class

Syntax

```
DZComponentConfig(COMPONENT_NAME, MENU_NAME, MKT)
```

Description

Use the DZComponentConfig constructor method to instantiate a DZComponentConfig object that is used to add, update, or remove drop zone configurations for the specified component.

Parameters

Parameter	Description
<i>COMPONENT_NAME</i>	Specifies the name of the component containing drop zones as a string value.
<i>MENU_NAME</i>	Specifies the name of the menu to which the component is registered as a string value.

Parameter	Description
<i>MKT</i>	Specifies the name of the market to which the component is registered as a three-character string value.

Returns

A DZComponentConfig object.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");
```

GetConfigurationsForComponent method: DZComponentConfig class

Syntax

```
GetConfigurationsForComponent()
```

Description

Use the GetConfigurationsForComponent method to retrieve all existing drop zone information and configurations for the component as an array of DZConfig objects. This array includes drop zones that are configured with subpages and drop zones that are not yet configured. The array is available through the arrDZInfo property.

Parameters

None.

Returns

None.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.GetConfigurationsForComponent();  
Local integer &i;  
For &i = 1 To &dzCompConfig.arrDZInfo.Len  
    /* Do something with the fetched drop zones. */  
    Local PTCS_DROPZONE:DZConfig &assignDZInfo = &dzCompConfig.arrDZInfo [&i];  
    If &assignDZInfo.GetSubpageName() = "" Then  
        If &assignDZInfo.SetSubpageName("MY_SUBPAGE_SBF") Then
```

```
        Local boolean &bRet = &assignDZInfo.Save();  
    Else  
        /* Indicate that the set operation failed. */  
    End-If;  
End-If;  
End-For;
```

Related Topics

- [arrDZInfo property: DZComponentConfig class](#)

GetConfigurationsForPage method: DZComponentConfig class

Syntax

```
GetConfigurationsForPage(PAGE_NAME)
```

Description

Use the GetConfigurationsForPage method to retrieve all existing drop zone information and configurations for the specified page as an array of DZConfig objects. This array includes drop zones that are configured with subpages and drop zones that are not yet configured. The array is available through the arrDZInfo property.

Parameters

Parameter	Description
<i>PAGE_NAME</i>	Specifies a string value representing the name of a <i>main</i> page, a nested subpage, or a secondary page that contains a valid drop zone group box. Note: To be valid, the page must be definitional linked to the component that is associated with this DZComponentConfig object.

Returns

None.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.GetConfigurationsForPage("EX_SHEET_HDR_FL");  
Local integer &i;  
For &i = 1 To &dzCompConfig.arrDZInfo.Len  
    /* Do something with the fetched drop zones. */  
End-For;
```

Related Topics

- [arrDZInfo property: DZComponentConfig class](#)

GetConfigurationsForPagefield method: DZComponentConfig class

Syntax

GetConfigurationsForPagefield(*PAGE_NAME*, *FldTabOrder*)

Description

Use the GetConfigurationsForPagefield method to retrieve any existing drop zone information and configuration for the specified page and page field as an array of DZConfig objects. For a page field, this array includes one element, because only one drop zone can be associated with a page field. The array is available through the arrDZInfo property.

Parameters

Parameter	Description
<i>PAGE_NAME</i>	Specifies a string value representing the name of a <i>main</i> page, a nested subpage, or a secondary page that contains a valid drop zone group box. Note: To be valid, the page containing the valid drop zone group box must be definitional linked to the component that is associated with this DZComponentConfig object.
<i>FldTabOrder</i>	Specifies the page field tab order for the group box as a string value.

Returns

None.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.GetConfigurationsForPagefield("EX_SHEET_HDR_FL", "2");  
Local integer &i;  
For &i = 1 To &dzCompConfig.arrDZInfo.Len  
    /* Do something with the fetched drop zone. */  
End-For;
```

Related Topics

- [arrDZInfo property: DZComponentConfig class](#)

GetConfigurationsForSubpage method: DZComponentConfig class

Syntax

```
GetConfigurationsForSubpage(SUBPAGE_NAME)
```

Description

Use the `GetConfigurationsForSubpage` method to retrieve all existing drop zone configurations for the component that have been configured with the specified subpage. The configurations are returned as an array of `DZConfig` objects available through the `arrDZInfo` property.

Note

A given subpage can be configured to one or more drop zones within the same component.

Parameters

Parameter	Description
<i>SUBPAGE_NAME</i>	Specifies the name of the subpage as a string value.

Returns

None.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.GetConfigurationsForSubpage("MY_SUBPAGE_SBF");  
Local integer &i;  
For &i = 1 To &dzCompConfig.arrDZInfo.Len  
    /* Do something with the fetched drop zones. */  
End-For;
```

Related Topics

- [arrDZInfo property: DZComponentConfig class](#)

RemoveAllConfigForComponent method: DZComponentConfig class

Syntax

```
RemoveAllConfigForComponent()
```

Description

Use the RemoveAllConfigForComponent method to delete all drop zone configurations for this component.

Parameters

None.

Returns

None.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.RemoveAllConfigForComponent();
```

DZComponentConfig Properties

In this section, the DZComponentConfig class properties are presented in alphabetical order.

arrDZInfo property: DZComponentConfig class

Description

Use the arrDZInfo property to return an array of DZConfig objects representing all of the drop zones for a specific component, page, or page field. In addition, the array can represent all of the drop zones within a component that are configured with the specified subpage.

The property is set and the array is populated using one of the methods of the DZComponentConfig class. Therefore, this property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
  
&dzCompConfig.GetConfigurationsForPage("EX_SHEET_HDR_FL");  
Local integer &i;  
For &i = 1 To &dzConfig.arrDZInfo.Len  
    /* Do something with the fetched drop zones. */  
End-For;
```

Related Topics

- [GetConfigurationsForComponent method: DZComponentConfig class](#)
- [GetConfigurationsForPage method: DZComponentConfig class](#)
- [GetConfigurationsForPagefield method: DZComponentConfig class](#)
- [GetConfigurationsForSubpage method: DZComponentConfig class](#)

DZConfig Methods

In this section, the DZConfig class methods are presented in alphabetical order.

GetSubpageName method: DZConfig class

Syntax

```
GetSubpageName()
```

Description

Use the GetSubpageName method to return the name of the subpage configured for the drop zone associated with this DZConfig object.

Parameters

None.

Returns

A string value.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
Local PTCS_DROPZONE:DZConfig &dzConfig =
```

```
&dzCompConfig.AddConfig("EX_SHEET_HDR_FL", "2");  
  
Local string &sSBPName = &dzConfig.GetSubpageName();
```

RemoveDZConfiguration method: DZConfig class

Syntax

```
RemovedZConfiguration()
```

Description

Use the RemoveDZConfiguration method to remove the configuration of a subpage for the drop zone associated with this DZConfig object.

Parameters

None.

Returns

A boolean value: True if a subpage was configured for the drop zone; False otherwise.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
Local PTCS_DROPZONE:DZConfig &dzConfig =  
&dzCompConfig.AddConfig("EX_SHEET_HDR_FL", "2");  
  
Local boolean &bRet = &dzConfig.RemovedZConfiguration();
```

Save method: DZConfig class

Syntax

```
Save()
```

Description

Use the Save method to save any configuration changes for this drop zone. Invoke Save after specifying the subpage for the configuration using the SetSubPageName method. If the drop zone is being reconfigured with a new subpage, then the save operation removes the previous configuration before saving the new.

Parameters

None.

Returns

A boolean value: True if the configuration is valid; False otherwise (for example, no subpage configured).

Example

```
Local boolean &bRet = &dzConfig.Save();
```

SetSubpageName method: DZConfig class

Syntax

```
SetSubpageName(SUBPAGE_NAME)
```

Description

Use the SetSubpageName method to configure the specified subpage to this drop zone. Subsequently, invoke the Save method to save the drop zone configuration.

Parameters

Parameter	Description
<i>SUBPAGE_NAME</i>	Specifies the name of the subpage as a string value.

Returns

A boolean value: True if the specified subpage is valid; False otherwise.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZComponentConfig &dzCompConfig = create  
PTCS_DROPZONE:DZComponentConfig("EX_EXP_SHEET_FL", "EX_ADMIN_EXPENSE_FL",  
"GBL");  
Local PTCS_DROPZONE:DZConfig &dzConfig =  
&dzCompConfig.AddConfig("EX_SHEET_HDR_FL", "2");  
  
If &dzConfig.SetSubPageName("MY_SUBPAGE_SBF") Then  
    Local boolean &bRet = &dzConfig.Save();  
Else  
    /* Indicate that the set operation failed. */  
End-If;
```

DZConfig Properties

In this section, the DZConfig class properties are presented in alphabetical order.

The following example illustrates the page field properties that are returned as parts of the PageFldDescr, PageFldId, PageFldName, and TabOrder properties.

The information that uniquely identifies page field can be found on the page definitions Order tab. In the following example, Top of Page Drop Zone is uniquely identified as 0.MYQKCONT_WRK.MQC_DZ_1.2.

MYQUICKCONTACTS (Page)									
Layout		Order							
Tab Order	Field ID	Lv	Label	Type	Field	Record	Parent Fi	Display Control	Related Field
1	1	0		Group Box			MYQUICKC		
2	2	0	Top of Page Drop Zone	Group Box	MQC_DZ_1	MYQKCONT_WRK	MYQUICKC		
3	5	0		Subpage			MYQUICKC		
4	9	0	User ID	Edit Box	OPRID	MYQKCONTACT_VW	MYQUICKC		
5	18	0		Group Box			MYQUICKC		

Related Topics

- Application Designer Developer's Guide: Inserting Configurable Drop Zones

IsERCCConfigured property: DZConfig class

Description

Use the IsERCCConfigured property to return a boolean value indicating whether embedded related content has been configured for this drop zone. Embedded related content is an alternative usage of a drop zone on fluid pages only.

If this property is True, it indicates that this drop zone has been configured for fluid embedded related content. Reconfiguring it with a subpage overwrites and removes the embedded related content configuration. Evaluating this property allows you to control whether overwriting the embedded related content configuration is acceptable.

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Related Topics

- Application Designer Developer's Guide: Configuring Drop Zones
- Fluid User Interface Developer's Guide: Working with Embedded Related Content

PageFldDescr property: DZConfig class

Description

Use the PageFldDescr property to return the label for the drop zone as a string value.

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

In the example at the beginning of this topic, the value stored in `&sPageFldDescr` is: Top of Page Drop Zone

```
Local string &sPageFldDescr = &dzConfig.PageFldDescr;
```

PageFldId property: DZConfig class

Description

Use the `PageFldId` property to return page field ID for the drop zone as a string value in the following format: *PAGE_NAME.Field_ID* . The *PAGE_NAME* is the name of the *main* page or the secondary page that contains the drop zone. When the drop zone is configured on a nested subpage, it is the name of the main page that is stored in this property.

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

In the example at the beginning of this topic, the value stored in `&sPageFldID` is: MYQUICKCONTACTS.2

```
Local string &sPageFldID = &dzConfig.PageFldId;
```

PageFldName property: DZConfig class

Description

Use the `PageFldName` property to return unique page field identifier for the drop zone as a string value in the following format: *occurs_lvl.RECORD_NAME.FIELD_NAME.Field_ID* .

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

In the example at the beginning of this topic, the value stored in `&sPageFldName` is:
`0.MYQKCONT_WRK.MQC_DZ_1.2`

```
Local string &sPageFldName = &dzConfig.PageFldName;
```

PageName property: DZConfig class

Description

Use the PageName property to return the name of the *main* page or the secondary page that contains the drop zone as a string value. When the drop zone is configured on a nested subpage, it is the name of the main page that is stored in this property.

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

In the example at the beginning of this topic, the value stored in `&sPageName` is:
`MYQUICKCONTACTS`

```
Local string &sPageName = &dzConfig.PageName;
```

TabOrder property: DZConfig class

Description

Use the TabOrder property to return the tab order for the page field as a string value.

This property is effectively read-only.

Note

While this property is actually defined as read/write, use it in a read-only manner in your PeopleCode programs.

Example

In the example at the beginning of this topic, the value stored in `&sTabOrder` is: 2

```
Local string &sTabOrder = &dzConfig.TabOrder;
```


DZContent Methods

In this section, the DZContent class methods are presented in alphabetical order.

DZContent method: DZContent class

Syntax

```
DZContent(SUBPAGE_NAME)
```

Description

Use the DZContent constructor method to instantiate a DZContent object. After instantiating the object, use the GetConfiguration method to return all of the components system wide where this subpage has been configured.

Parameters

Parameter	Description
<i>SUBPAGE_NAME</i>	Specifies the name of the subpage as a string value.

Returns

A DZContent object.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZContent &dzContent = create  
PTCS_DROPZONE:DZContent("MY_SUBPAGE_SBF");
```

GetConfiguration method: DZContent class

Syntax

```
GetConfiguration()
```

Description

Use the GetConfiguration method to return an array of DZComponentConfig objects representing all of the components system wide where this subpage has been configured.

Parameters

None.

Returns

An array of DZComponentConfig objects.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZContent &dzContent = create  
PTCS_DROPZONE:DZContent("MY_SUBPAGE_SBF");  
Local array of PTCS_DROPZONE:DZComponentConfig &arrDzCompConfig =  
&dzContent.GetConfiguration();  
  
Local integer &i;  
For &i = 1 To &arrDzCompConfig.Len  
    /* Do something with the fetched drop zone configurations. */  
End-For;
```

DZPage Methods

In this section, the DZPage class methods are presented in alphabetical order.

DZPage method: DZPage class

Syntax

DZPage(*PAGE_NAME*)

Description

Use the DZPage constructor method to instantiate a DZPage object that is used to get drop zone configurations by component for this page or secondary page.

Parameters

Parameter	Description
<i>PAGE_NAME</i>	Specifies a string value representing the name of a <i>main</i> page that contains a valid drop zone group box, or a <i>main</i> page that contains a subpage that contains a valid drop zone group box, or a secondary page that contains a valid drop zone group box.

Returns

A DZPage object.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZPage &dzPage = create  
PTCS_DROPZONE:DZPage("EX_SHEET_HDR_FL");
```

GetConfigurationFromPageField method: DZPage class

Syntax

```
GetConfigurationFromPageField(FldTabOrder)
```

Description

Use the GetConfigurationFromPageField method to return the drop zone configurations for the specified page field as an array of DZComponentConfig objects.

Parameters

Parameter	Description
<i>FldTabOrder</i>	Specifies the page field tab order for the drop zone group box as a string value.

Returns

An array of DZComponentConfig objects.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZPage &dzPage = create  
PTCS_DROPZONE:DZPage("EX_SHEET_HDR_FL");  
Local array of PTCS_DROPZONE:DZComponentConfig &arrDzConfig =  
&dzPage.GetConfigurationFromPageField("2");  
  
Local integer &i;  
For &i = 1 To &arrDzConfig.Len  
    /* Do something with the fetched configurations. */  
End-For;
```

GetConfigurationFromPageName method: DZPage class

Syntax

```
GetConfigurationFromPageName()
```

Description

Use the GetConfigurationFromPageName method to return the drop zone configurations for the current page as an array of DZComponentConfig objects.

Parameters

None.

Returns

An array of DZComponentConfig objects.

Example

```
import PTCS_DROPZONE:*;  
  
Local PTCS_DROPZONE:DZPage &dzPage = create  
PTCS_DROPZONE:DZPage("EX_SHEET_HDR_FL");  
Local array of PTCS_DROPZONE:DZComponentConfig &arrDzConfig =  
&dzPage.GetConfigurationFromPageName();  
  
Local integer &i;  
For &i = 1 To &arrDzConfig.Len  
    /* Do something with the fetched configurations. */  
End-For;
```

DynamicLoader Class

Understanding the DynamicLoader Class

The Advanced Sectionalized Homepage development model enables application developers to dynamically create tiles and load them into a section on the homepage. As part of the development process of dynamically generating tiles, you must create a custom application class that implements this PTNUI:Dynamic:DynamicLoader base class.

DynamicLoader Class Methods

In this section, the DynamicLoader class methods are presented in alphabetical order

AddTileToSection method: DynamicLoader class

Syntax

```
AddTileToSection(Tile)
```

Description

Use this method to add the newly created tile to the section within the homepage (passed in parameters of constructor).

Parameters

Parameter	Description
<i>Tile</i>	Specifies the tile to be added to a section.

Returns

None.

Example

```
&oTile = %This.CreateTileUsingTab("", "MY_SECTION");
&oTile.RowNum = %This.GetNextRowNumber();
&oTile.GltImageName = Image.MY_IMAGE;
%This.SetupFluidTarget(&oTile,
GenerateComponentContentURL(%This.Tab.PortalName, %This.Tab.NodeName,
MenuName.MY_MENU, %Market, Component.MY_COMPONENT, Page.MY_PAGE1,
>Action_UpdateDisplay));
%This.AddTileToSection(&oTile);
```

AdjustAccessibilityByStyle method: DynamicLoader class

Syntax

```
AdjustAccessibilityByStyle(&oTile As PTNUI:Model:Tile)
```

Description

Use this method to adjust accessibility-related properties on tiles and section-action buttons based on section's PS_STYLECLASSES attributes or tile's PS_STYLECLASSES attributes. For example, in the case of buttons with the tile style of *psc_section-action-button*, the tile is identified as a button with these properties (IsNotTile, IsRoleButton, and UseAltText) set to true.

Parameters

Parameter	Description
<i>&oTile</i>	Specifies a tile object reference.

Returns

None.

CreateTile method: DynamicLoader class

Syntax

```
CreateTile(Node_name, Portal_name, Tile_name, Tile_label)
```

Description

Use this method to create a tile object, which can be further modified by applications code and added to a section on a homepage. If the tile name is not provided, it is dynamically generated with the DYN prefix followed by a number (zero filled).

Parameters

Parameter	Description
<i>Node_name</i>	Specifies the name of the node as a String value.
<i>Portal_name</i>	Specified the portal name as a String value.
<i>Tile_name</i>	Specifies the tile name as a String value.
<i>Tile_label</i>	Specifies the tile label as a String value.

Returns

A tile object.

Related Topics

- [CreateTileUsingTab method: DynamicLoader class](#)

- [GenerateTileName method: DynamicLoader class](#)
- [SetTitleNamePrefix method: DynamicLoader class](#)

CreateTileUsingTab method: DynamicLoader class

Syntax

```
CreateTileUsingTab(Tile_name, Tile_label)
```

Description

Use this method to create a tile object with the node of the homepage and portal information. The tile object can be further modified by applications code and added to a section on the homepage. If the tile name is not provided, it is dynamically created with a DYN prefix followed by a number (zero filled).

Parameters

Parameter	Description
<i>Tile_name</i>	Specifies the tile name as a String value.
<i>Tile_label</i>	Specifies the tile label as a String value.

Returns

A tile object.

Related Topics

- [CreateTile method: DynamicLoader class](#)
- [GenerateTileName method: DynamicLoader class](#)
- [SetTitleNamePrefix method: DynamicLoader class](#)

GenerateLocalURL method: DynamicLoader class

Syntax

```
GenerateLocalURL(URL_Fragment, new_window)
```

Description

Use this method to generate a URL based on the ContentURI property of the request object. The URL is manipulated based on the *new_window* parameter and appends the *URL_fragment* parameter to the URL.

Parameters

Parameter	Description
<i>URL_Fragment</i>	Specifies a fragment of an URL.
<i>new_window</i>	Specifies whether the URL should be opened in a new window as a Boolean value.

Returns

A URL as a String.

GenerateTileName method: DynamicLoader class

Syntax

```
GenerateTileName()
```

Description

Use this method to generate a tile name. The tile name is generated based on the number of dynamically named tiles created previously in this instance. By default, the tile name is prefixed with DYN followed by a 6-digit number (zero filled).

Parameters

None.

Returns

A tile name as a String.

GetConfigData method: DynamicLoader class

Syntax

```
GetConfigData()
```

Description

This method returns all initialized data configurations. The initialization parameter determines whether all settings or a subset of settings are returned.

Parameters

None.

Returns

An array of array of strings for all data configurations as name-value pairs.

Related Topics

- [GetConfigDataByName method: DynamicLoader class](#)
- [InitConfigData method: DynamicLoader class](#)

GetConfigDataByName method: DynamicLoader class

Syntax

```
GetConfigDataByName(config_data_name)
```


Description

Use this method to retrieve specific data configurations after initialization. If you want to retrieve all data configurations, use the `GetConfigData` method.

Parameters

Parameter	Description
<i>config_data_name</i>	Specifies a data-configuration name as a String value. Note: You should enter the style class-based data configuration without the <i>data_</i> prefix. For style class-based data configurations, see Portal Technology: Using Delivered PeopleTools Section Templates.

Returns

A String representing the value of the specified data configuration.

Related Topics

- [InitConfigData method: DynamicLoader class](#)
- [GetConfigData method: DynamicLoader class](#)

GetNextRowNumber method: DynamicLoader class

Syntax

```
GetNextRowNumber()
```

Description

When the dynamic loader is instantiated, the largest row number of any statically defined (through the Homepage CREF) for the section is stored. Use the `GetNextRowNumber` method to return the next row to be used so that tiles appear in the order in which they are defined. If any statically defined tiles exist on a section, these tiles seed the starting number.

Parameters

None.

Returns

A number of the next row in a section.

InitConfigData method: DynamicLoader class

Syntax

```
InitConfigData(NULL)OR configdata_names as an array of Strings
```

Description

This method looks for data configurations within a section's PS_STYLECLASSES and returns configurations based on the parameters.

Parameters

Parameter	Description
<i>NULL</i> or <i>configdata_names</i>	Specify NULL to return all data configurations. OR Specify data configurations as an array of Strings.

Returns

An array of array of strings of configuration data as a name-value pair.

Related Topics

- [GetConfigData method: DynamicLoader class](#)
- [GetConfigDataByName method: DynamicLoader class](#)

LoadSection method: DynamicLoader class

Syntax

```
LoadSection()
```

Description

Use this method to load a section with tiles.

Parameters

None.

Returns

None.

Example

```
method LoadSection
    /* Extends/implements PTNUI:Dynamic:DynamicLoader.LoadSection */
    /*AddOnLoadScript("console.log('LoadSection for '", "" |
EscapeHTML(%This.Section.SectionName) | ""');"); */
    Local PTNUI:Model:Tile &oTile;
    &oTile = %This.CreateTileUsingTab("", "Team Calendar");
    &oTile.RowNum = %This.GetNextRowNumber();
    &oTile.GltImageName = Image.QE_TEAM_CALENDAR;
    %This.SetupFluidTarget(&oTile,
GenerateComponentContentURL(%This.Tab.PortalName, %This.Tab.NodeName,
MenuName.MYMENU, %Market, Component.MY_COMPONENT, Page.MYPAGE,
%Action_Updatedisplay));
```

```
%This.AddTileToSection(&oTile);  
end-method;
```

SetBehaviorDefault method: DynamicLoader class

Syntax

```
SetBehaviorDefault(Tile)
```

Description

Use this method to set the tile properties correctly for the *Optional/Default* tile behavior type. The default tile behavior type is *Optional*.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile.

Returns

None.

Related Topics

- [SetBehaviorFixed method: DynamicLoader class](#)
- [SetBehaviorRequired method: DynamicLoader class](#)

SetBehaviorFixed method: DynamicLoader class

Syntax

```
SetBehaviorFixed(Tile)
```

Description

Use this method to set the tile properties correctly for the *Required/Fixed* tile behavior type. The default tile behavior type is *Optional*.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile.

Returns

None.

Related Topics

- [SetBehaviorDefault method: DynamicLoader class](#)
- [SetBehaviorRequired method: DynamicLoader class](#)

SetBehaviorRequired method: DynamicLoader class

Syntax

SetBehaviorRequired(*Tile*)

Description

Use this method to set the tile properties correctly for the *Required* tile behavior type. The default tile behavior type is *Optional*.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile.

Returns

None.

Related Topics

- [SetBehaviorDefault method: DynamicLoader class](#)
- [SetBehaviorFixed method: DynamicLoader class](#)

SetDefaultTileImage method: DynamicLoader class

Syntax

SetDefaultTileImage(*Image_Name*)

Description

Use this method to set the default tile image to be used if no tile image is specified explicitly when creating the tile using the DynamicLoader application class. In the case of the Recently Visited section, this image will be used for every entry within the section definition.

Parameters

Parameter	Description
<i>Image_Name</i>	Specifies an image for the tile as a String value.

Returns

None.

SetTitleNamePrefix method: DynamicLoader class

Syntax

```
SetTitleNamePrefix(Prefix)
```

Description

Use this method to set the prefix to the desired string for a dynamic tile name. The prefix should not be more than 24 characters, and it cannot contain spaces.

The default prefix for dynamic tiles is DYN.

If the prefix string is invalid or if the prefix is an empty string, an error is not displayed. The default prefix (DYN) is used.

Parameters

Parameter	Description
<i>Prefix</i>	Specifies the prefix for a tile name as a String value. Note: The prefix should not be more than 24 characters, and it cannot contain spaces.

Returns

None.

Related Topics

- [CreateTile method: DynamicLoader class](#)
- [CreateTileUsingTab method: DynamicLoader class](#)

SetupClassicTarget method: DynamicLoader class

Syntax

```
SetupClassicTarget(Tile, URL)
```

Description

This method sets up the tile object properly for a given type of URL context (Classic) and uses the URL to populate GltContentActionURL or GltPortalActionURL, the target which is launched when a user selects the tile.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile, which a user selects to launch the target content.
<i>URL</i>	Specifies the URL of the target content.

Returns

None.

Related Topics

- [SetupExternalTarget method: DynamicLoader class](#)
- [SetupFluidTarget method: DynamicLoader class](#)
- [SetupGenericTarget method: DynamicLoader class](#)

SetupExternalTarget method: DynamicLoader class

Syntax

```
SetupExternalTarget(Tile, URL)
```

Description

This method sets up the tile object properly for a given type of URL context (External) and uses the URL to populate GltContentActionURL or GltPortalActionURL, the target which is launched when a user selects the tile.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile, which a user selects to launch the target content.
<i>URL</i>	Specifies the URL of the target content.

Returns

None.

Related Topics

- [SetupClassicTarget method: DynamicLoader class](#)
- [SetupGenericTarget method: DynamicLoader class](#)
- [SetupFluidTarget method: DynamicLoader class](#)

SetupFluidTarget method: DynamicLoader class

Syntax

```
SetupFluidTarget(Tile, URL)
```

Description

This method sets up the tile object properly for a given type of URL context (Fluid) and uses the URL to populate GltContentActionURL or GltPortalActionURL, the target which is launched when a user selects the tile.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile, which a user selects to launch the target content.
<i>URL</i>	Specifies the URL of the target content.

Returns

None.

Example

```
Local PTNUI:Model:Tile &oTile;  
    &oTile = %This.CreateTileUsingTab("", "XYZ");  
    &oTile.RowNum = %This.GetNextRowNumber();  
    &oTile.GltImageName = Image.MYIMAGE;  
    %This.SetupFluidTarget(&oTile,  
GenerateComponentContentURL(%This.Tab.PortalName, %This.Tab.NodeName,  
MenuName.MY_MENU, %Market, Component.MY_COMPONENT, Page.MY_PAGE1,  
%Action_Updatedisplay));
```

Related Topics

- [SetupClassicTarget method: DynamicLoader class](#)
- [SetupExternalTarget method: DynamicLoader class](#)
- [SetupGenericTarget method: DynamicLoader class](#)

SetupGenericTarget method: DynamicLoader class

Syntax

```
SetupGenericTarget(Tile, URL)
```

Description

This method sets up the tile object properly for a given type of URL context (Generic) and uses the URL to populate GltContentActionURL or GltPortalActionURL, the target which is launched when a user selects the tile.

Parameters

Parameter	Description
<i>Tile</i>	Specifies a tile, which a user selects to launch the target content.
<i>URL</i>	Specifies the URL of the target content.

Returns

None.

Related Topics

- [SetupClassicTarget method: DynamicLoader class](#)
- [SetupExternalTarget method: DynamicLoader class](#)
- [SetupFluidTarget method: DynamicLoader class](#)

Exception Class

Understanding Exception Class

An *exception* can be defined as any unusual event that requires special handling in your PeopleCode program. This could include some kind of hardware failure, such as trying to write to a printer that's been turned off, or a software failure, such as trying to divide by zero. You can also detect your own errors, and use the Throw statement to construct an exception.

Exception handling is the processing you initiate when an exception occurs. You can handle errors in PeopleCode using the Catch statement. The places in your code where you want exceptions handled must be enclosed by the Try and End-Try statements.

The Exception class encapsulates exceptional runtime conditions. It can be used with most PeopleCode programs.

Note

The Exception class does *not* work with any of the PeopleSoft APIs, that is, the classes whose objects are declared as type ApiObject. This includes the Tree classes, the Query classes, Search classes, and so on.

The process of error handling can be broken down as follows:

- An error occurs (either a hardware or software error).
- The error is detected and an exception is thrown (either by the system or by your program).
- Your exception handler provides the response.

How Exceptions Are Thrown

Exceptions get thrown either by the runtime system or by your program.

In general, the kinds of errors that cause the runtime system to throw an exception are errors that terminate your PeopleCode program. For example, dividing by zero, referencing a method or property that doesn't exist, or trying to use a method or property on a null object.

To throw your own exceptions, you can use the Throw statement.

When to Use Exceptions

If the error is something that you can easily check, you shouldn't use exceptions. For example, suppose your page had begin and end date fields. In your SavePreChange PeopleCode program, you would want to check to verify that the end date was after the begin date. This kind of error produces incorrect data. It doesn't terminate your PeopleCode program. This is a simple check, one that you don't need to throw an exception for.

Errors that you might want to use exceptions for are the kinds that you are going to check for often. If you do not want to catch a specific exception, but any general exception, then a simple try-catch block is all that is required. Just write code to catch the general Exception object. For example:

```
try
    &RETCODE = GetAttachment(&IB_ATTACH_REC, &SOURCEFILENAME, &SOURCEFILENAME,
"PS_⇒
FILEDIR");
catch Exception &err
    &RETCODE = GetAttachment(&IB_ATTACH_REC, &SOURCEFILENAME, "/files/" |⇒
    &SOURCEFILENAME, "PS_SERVDIR");
end-try;
```

However, it might make more sense to have a single exception class for that kind of error, so you'd only have to write your error handling code once. For example, suppose that a function you called was supposed to return an array object that you'd then manipulate using the array class methods and properties. When the function fails and doesn't return an array object, you can either check for null, or check for an exception (as this kind of error terminates your PeopleCode program). If you must often check for nulls, perhaps instead of constantly checking, you could rely on the runtime system throwing exceptions for you.

The following provides a pseudo-code example:

```
import MYAPP:Exception;
/* This subpackage contains all the exception classes for your app */

try
    &MyArray = GetArrayData(&Param1, &Param2, &Param3);
    /* Code to manipulate &MyArray here */

catch ExceptionNull &Ex1
    if &Ex1.MessageSetNumber = 2
        and &Ex1.MessageNumber = 236 Then

        /* This is the message set and message number for &MyArray being Null */

        /* do data error handling */

    end-if;
end-try;
```

Considerations Using Exceptions and Transfer Functions

Using functions that transfer the end user to a new component, such as the DoModal, DoModalComponent, or Transfer functions (in some cases) inside a try-catch block do *not* catch PeopleCode exceptions thrown in the new component. Starting a new component starts a brand new PeopleCode evaluation context. Exceptions are caught only when exceptions thrown within the *current* component.

In the following code example, the catch statement only catches exceptions thrown in the code *prior to* using the DoModal function, but not any exceptions that are thrown within the new component.

```
/* Set up transaction */
If %CompIntfcName = "" Then
    try
        &oTrans = &g_ERMS_TransactionCollection.GetTransactionByName(RB_EM_⇒
WRK.DESCR);
        &sSearchPage = &oTrans.SearchPage;
        &sSearchRecord = &oTrans.SearchRecord;
        &sSearchTitle = &oTrans.GetSearchPageTitle();
        If Not All(&sSearchPage, &sSearchRecord, &sSearchTitle) Then
            Error (MsgGetText(17834, 8081, "Message Not Found"));
        End-If;
        &c_ERMS_SearchTransaction = &oTrans;
        /* Attempt to transfer to hidden search page with configurable filter */
        &nModalReturn = DoModal(@("Page." | &sSearchPage), &sSearchTitle, - 1,
- 1);
    catch Exception &e
        Error (MsgGetText(17834, 8082, "Message Not Found"));
    end-try;
```

Try-Catch Blocks

The statements that immediately follow the try statement are called the *protected statements*. These are the only statements that are “protected” by the catch clauses in the try-catch blocks. The catch clauses in a try-catch block can be executed only if an exception is thrown by the protected statements. In addition, a catch clause is executed only when handling an exception that matches the type given on the catch. Any exceptions thrown by the catch clauses are not caught by their own try-catch block.

The execution of the try-catch block starts by executing the protected statements. If none of these statements—as well as none of the statements called by them—causes an exception to be thrown, the try-catch block is done. The statements in the catch clauses are not executed.

Each catch clause in the try-catch section declares a local variable of class Exception or a subclass of Exception. A catch clause local variable has the same scope and lifetime as a local variable declared at the start of the catch clause.

The following is the general order of exception execution and handling in try-catch blocks:

1. The exception is thrown.
2. The exception is considered by the first enclosing try-catch block.
Try-catch blocks can be nested.
This is a dynamic enclosure—that is, tracking back through method and function callers. Any intervening non-try-catch blocks are skipped.
3. Within this try-catch block, the catch clauses are considered in program text order—that is, first the first catch clause is considered, then the next, and so on to the last. At each consideration, the type (class) of the exception being thrown is compared to the type of the local variable declared by the catch clause. If the exception being thrown is the same as the catch type or is a subtype of it (so the exception could be assigned to the catch's local variable), the catch clause matches the exception being thrown.

4. If a matching catch clause is found, that catch clause handles the exception. The exception is considered “caught,” which means that it does not propagate further. Execution proceeds by assigning the thrown object to the catch clause’s local variable and executing the statements in the catch clause. When one of the catch clauses handles the exception (and the statements in the catch clause don’t throw any further exceptions), execution continues normally after the try-catch block.

If a statement in the catch clause throws another exception, that exception begins to propagate from the point of the throw.
5. If a matching catch clause is not found—that is, if no catch clauses can accept the thrown object—then the thrown object is still uncaught. The thrown object is considered by the next dynamically enclosing try-catch block (return to step 3).
6. If a thrown object is not caught by any catch clause in any dynamically enclosing try-catch blocks, a fatal PeopleCode evaluation error is produced.

Data Type for Exception Class Objects

Exception Class objects are declared as type Exception. For example:

```
Local Exception &Ex1;
```

Scope of Exception Class Objects

Exception objects can be instantiated only from PeopleCode. This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

Exception Class Built-in Functions

PeopleCode Language Reference: CreateException function

PeopleCode Language Reference: throw function

PeopleCode Language Reference: try function

Exception Class Methods

In this section, we discuss the Exception class methods, in alphabetical order.

GetSubstitution method: Exception class

Syntax

```
GetSubstitution(Index)
```

Description

When you create a message in the message catalog, you can specify values in the message text, such as %1, %2, and so on, that are replaced with values by the system at runtime. The value that gets put into the message text value is called the *substitution string*. The

GetSubstitution method returns the substitution string in the error message specified by *Index*, with 1 being the first substitution string, 2 being the second, and so on.

Parameters

Parameter	Description
<i>Index</i>	Specify the substitution string number that you'd like to return. The first one is 1, the second is 2, and so on. You must specify a valid substitution string number, that is, you can't specify a 4 if there are only three substitution strings.

Returns

The substitution text as a string.

Example

```
If &Ex1.MessageSetNumber = 2 and &Ex1.MessageNumber = 170 Then
  /* Get Sendmail error */
  &String = &Ex1.GetSubstitution(1);
  /* do processing according to type of Sendmail error */
  . . . .
End-if;
```

Related Topics

- [SetSubstitution method: Exception class](#)
- System and Server Administration: Using Administration Utilities

Output method: Exception class

Syntax

Output()

Description

Use the Output method if you want to display the message associated with the exception to the user (in an online context), or have it logged (if offline). This is analogous to using the MessageBox function to log a message.

Parameters

None.

Returns

If called in an online context, display the message associated with the exception to the user. If called offline, record the exception for later display or analysis.

Example

```
catch Except2 &Ex2
    &Ex2.Output(); /* tell about it */
```

Related Topics

- PeopleCode Language Reference: throw function

SetSubstitution method: Exception class

Syntax

```
SetSubstitution(Index, String)
```

Description

When you create a message in the message catalog, you can specify values in the message text, such as %1, %2, and so on, that are replaced with values by the system at runtime. The value that gets put into the message text value is called the *substitution string*. The SetSubstitution method sets the substitution string in the error message specified by *Index*, with 1 being the first substitution string, 2 being the second, and so on.

Parameters

Parameter	Description
<i>Index</i>	Specify the substitution string number that you'd like to replace. The first one is 1, the second is 2, and so on. You must specify a valid substitution string number, that is, you can't specify a 4 if there are only three substitution strings.
<i>String</i>	Specify the text of the substitution string.

Returns

None.

Related Topics

- [GetSubstitution method: Exception class](#)
- System and Server Administration: Using Administration Utilities

ToString method: Exception class

Syntax

```
ToString([AddContext])
```

Description

The ToString method returns the expanded message text associated with the exception in the current user's current language. The string returned is the message text (in the current user's language) with the substitution string replacing the substitution markers (%1 and so on) in the text. It always returns the context information about where the error occurred at the end of the message. To suppress this, specify *AddContext* as false.

Parameters

Parameter	Description
<i>AddContext</i>	Specify whether to have the context information about where the error occurred added at the end of the message. This parameter takes a Boolean value. The default is true, that is, to add the context information.

Returns

A string.

Related Topics

- [Output method: Exception class](#)

Exception Class Properties

In this section, we discuss the Exception class properties, in alphabetical order.

Context property: Exception class

Description

This property returns a string description of the location of the condition in PeopleCode or other processing. This might contain a stack backtrace at the point of the exceptional condition.

This property is read-only.

Example

This is the "At" part of the error message display. For example, for an exception thrown in Record.Field Event QE_31DIGREC1.QE_31DIGFLD5 FieldChange function EachComp at PeopleCode program counter 671, statement 11 of the source program, the Context would be:

```
At QE_31DIGREC1.QE_31DIGFLD5.FieldChange EachComp   PCPC:671   Statement:11
```

DefaultText property: Exception class

Description

This property sets a string to use as the basic message text for the exception when the message can't be found in the message catalog.

This property is read/write.

MessageNumber property: Exception class

Description

This property is the message number for a message describing the exceptional condition.

This property is read-only.

MessageSetNumber property: Exception class

Description

This property is the message set number for a message describing the exceptional condition.

This property is read-only.

MessageSeverity property: Exception class

Description

This property is the message severity as a string for a message describing the exceptional condition. The message severity is set for the message when it's created in the message catalog. The values are:

Numeric Value	Constant Value	Description
C	%MsgSeverity_Cancel	Message severity is Cancel.
E	%MsgSeverity_Error	Message severity is Error.
M	%MsgSeverity_Message	Message severity is Message.
W	%MsgSeverity_Warning	Message severity is Warning.

This property is read-only.

StackTrace property: Exception class

Description

This property returns a string with the complete stack trace. This includes the whole context, (that is, current location + called from X + called from. . .)

You can process the returned string by breaking it into pieces using the Split function, and using "Called from" as the value to use for separating the string. For example,

```
Local Array of String &Pieces;  
  
/* get exception */  
  
&Pieces = Split(&E.StackTrace, "Called from:");
```

This property is read-only.

Example

The following is an example of a trace stack.

```
In C (0,0) AEMINITEST.MAIN.GBL.default.1900-01-01.Step02.OnExecute  Name:C
PCPC
:136  Statement:2
Called from:AEMINITEST.MAIN.GBL.default.1900-01-01.Step02.OnExecute  Name:B
Sta
tement:6
Called from:AEMINITEST.MAIN.GBL.default.1900-01-01.Step02.OnExecute  Name:A
Sta
tement:13
Called from:AEMINITEST.MAIN.GBL.default.1900-01-01.Step02.OnExecute
Statement:1
8
```

SubstitutionCount property: Exception class

Description

This property returns the number of substitution strings in the message text as a number.

The number of substitutions comes from the *subslst* of the CreateException function.

This property is read-only.

Related Topics

- PeopleCode Language Reference: CreateException function

Feed Classes

Understanding the Feed Classes

This chapter documents the following feed classes from the PTFP_FEED application package:

- Feed class
- FeedFactory class
- DataSource subpackage:
 - DataSource class
 - DataSourceParameter class
 - DataSourceParameterValue class
 - DataSourceSetting class
- UTILITY subpackage: Utility class
- XML_FEED subpackage
 - FeedDoc class
 - FeedEntry class

The subpackages and classes not documented in this chapter include:

- DataSource subpackage:
 - FeedDataSource
 - GenericDataSource
 - PSQueryDataSource
 - WorklistDataSource
- EXCEPTION subpackage:
 - DuplicateIDException class
 - FeedException class
 - ImmutableException class
 - InitializationException class
 - InvalidMethodException class
 - InvalidTypeException class
 - InvalidValueException class
 - NotAllowedException class
 - NotFoundException class
 - PrivilegeException class
 - PropertyNotSetException class

- Interface subpackage:
 - IGetFeed class
 - IGetFeedList class
 - IGetPrePubFeed class
- UTILITY subpackage
 - Attribute class
 - Authorization class
 - Collection class
 - FeedRequest class
 - HoverMenu class
 - IBOperation class
 - Link class
 - PSComponent class
 - PublishAsRequest class
 - RelatedFeedsRequest class
 - SearchRequest class
- XML_ATOM10 subpackage
 - A10_FeedDoc class
 - A10_FeedEntry class
- XML_OPML subpackage
 - OPMLDoc class
 - OPMLEntry class
 - OPMLFolder class

Related Topics

- Feed Publishing Framework: Feed Publishing Framework
- Integration Broker: PeopleSoft Integration Broker Overview

Importing Feed Classes

The feed classes are application classes, not built-in classes, like Rowset, Field, Record, and so on. Before you can use these classes in your PeopleCode program, you must import them into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

Feed Class

This section provides an overview of the Feed class and discusses:

- Feed class constructor.
- Feed class methods.
- Feed class properties.

The Feed class provides the object representation of a feed. The class provides all the basic services for the feed definition and execution of a feed.

Feed Class Constructor

This section presents the constructor for the Feed class. Use the FeedFactory class to create an instance of the Feed class.

Feed method: Feed class

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:Feed;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.createFeed("feed_ID");
```

Related Topics

- [createFeed method: FeedFactory class](#)
- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

Feed Class Methods

In this section, the Feed class methods are presented in alphabetical order.

delete method: Feed class

Syntax

```
delete()
```

Description

Use this method to delete a feed definition from the database.

Parameters

None.

Returns

A Boolean value: True if the deletion was successful, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DELETION);

If &thisFeed <> Null And
    &thisFeed.Authorized Then
    &succeed = &thisFeed.delete();
End-If;
```

Related Topics

- [deleteFeed method: FeedFactory class](#)

equals method: Feed class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current feed. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current Feed object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed1 = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:Feed &thisFeed2 = &thisFeedFactory.getFeed("feed_ID", ⇒
```

```
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);  
  
If &thisFeed1.equals(&thisFeed2) Then  
    /* Do some process */  
End-If;
```

Related Topics

- [ID property: Feed class](#)
- [ObjectType property: Feed class](#)

execute method: Feed class

Syntax

```
execute()
```

Description

Use this method to execute the current feed definition to get a FeedDoc object.

Parameters

None.

Returns

A FeedDoc object.

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:Feed;  
import PTFP_FEED:XML_FEED:FeedDoc;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒  
&thisFeedFactory.Utility.OPERATINGMODE_EXECUTION);  
Local PTFP_FEED:XML_FEED:FeedDoc &thisFeedDoc;  
  
If &thisFeed <> Null Then  
    &thisFeed.populatePrefData( Null);  
    &thisFeedDoc = &thisFeed.execute();  
End-If;
```

Related Topics

- [getFeedDoc method: FeedFactory class](#)
- [FeedDoc Class](#)
This section provides an overview of the FeedDoc class and discusses:

getAttribute method: Feed class

Syntax

```
getAttribute(attribute_ID)
```

Description

Use this method to get a feed attribute by ID.

Parameters

Parameter	Description
<i>attribute_ID</i>	Specifies the ID of the Attribute object as a string.

Returns

A feed Attribute object.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:UTILITY:Attribute;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:UTILITY:Attribute &logo;

If &thisFeed <> Null Then
    &logo =
    &thisFeed.getAttribute(&thisFeedFactory.Utility.FEEDATTRIBUTE_LOGOURL);
End-If;
```

Related Topics

- [FEEDATTRIBUTE_AUTHOR property: Utility class](#)
- [FEEDATTRIBUTE_CLOUD property: Utility class](#)
- [FEEDATTRIBUTE_COMPLETE property: Utility class](#)
- [FEEDATTRIBUTE_CONTRIBUTOR property: Utility class](#)
- [FEEDATTRIBUTE_COPYRIGHT property: Utility class](#)
- [FEEDATTRIBUTE_EXPIRES property: Utility class](#)
- [FEEDATTRIBUTE_ICONURL property: Utility class](#)
- [FEEDATTRIBUTE_LOGOURL property: Utility class](#)
- [FEEDATTRIBUTE_MANAGINGEDITOR property: Utility class](#)
- [FEEDATTRIBUTE_MAXAGE property: Utility class](#)

- [FEEDATTRIBUTE_PERSINSTRUCTION property: Utility class](#)
- [FEEDATTRIBUTE_RATING property: Utility class](#)
- [FEEDATTRIBUTE_SKIPDAYS property: Utility class](#)
- [FEEDATTRIBUTE_SKIPHOURS property: Utility class](#)
- [FEEDATTRIBUTE_TEXTINPUT property: Utility class](#)
- [FEEDATTRIBUTE_TTL property: Utility class](#)
- [FEEDATTRIBUTE_WEBMASTER property: Utility class](#)
- [FEEDATTRIBUTE_XSL property: Utility class](#)

load method: Feed class

Syntax

`load()`

Description

Use this method to load the feed definition from the database.

Parameters

None.

Returns

A Boolean value: True if the feed definition was loaded successfully, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", =>
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);

If &thisFeed <> Null Then
    &succeed = &thisFeed.load();
End-If;
```

loadFromTemplate method: Feed class

Syntax

`loadFromTemplate(template_ID)`

Description

Use this method to load the specified feed template definition from the database.

Parameters

Parameter	Description
<i>template_ID</i>	Specifies the feed template ID as a string.

Returns

A Boolean value: True if the feed template definition was loaded successfully, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
If &thisFeed <> Null Then
    &succeed = &thisFeed.loadFromTemplate("template_ID");
End-If;
```

PopulateDSParamsWithDefaults method: Feed class

Syntax

```
PopulateDSParamsWithDefaults()
```

Description

Use this method to populate the data source parameter collection for this feed with default values only.

Parameters

None.

Returns

None.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:EXCEPTION:FeedException;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);

/* Reset the Data Source Parameters of the Feed to their defaults. */
try
    &thisFeed.PopulatedDSParamsWithDefaults();
```

```
catch PTFP_FEED:EXCEPTION:FeedException &ex;  
end-try;
```

Related Topics

- [DataSourceParameter Class](#)

This section provides an overview of the DataSourceParameter class and discusses:

populatePrefData method: Feed class

Syntax

```
populatePrefData(&FeedRequest)
```

Description

Use this method to populate the administrator- or user-specified data source parameter values from the feed definition or from the feed request if parameters are specified there.

Parameters

Parameter	Description
<i>&FeedRequest</i>	Specifies a FeedRequest object.

Returns

None.

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:Feed;  
import PTFP_FEED:XML_FEED:FeedDoc;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒  
&thisFeedFactory.Utility.OPERATINGMODE_EXECUTION);  
Local PTFP_FEED:XML_FEED:FeedDoc &thisFeedDoc;  
  
If &thisFeed <> Null Then  
    &thisFeed.populatePrefData( Null);  
    &thisFeedDoc = &thisFeed.execute();  
End-If;
```

publishToSites method: Feed class

Syntax

```
publishToSites(Sites)
```

Description

Use this method to publish the feed definition to the specified sites.

Parameters

Parameter	Description
<i>Sites</i>	Specifies as an array of string the list of sites to which to publish the feed definition.

Returns

None.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);

If &thisFeed <> Null Then
    &thisFeed.publishToSites(CreateArray("EMPLOYEE", "CUSTOMER"));
End-If;
```

resetFeedAttributes method: Feed class

Syntax

```
resetFeedAttributes()
```

Description

Use this method to reset the FeedAttributes collection.

Parameters

None.

Returns

An empty FeedAttributes collection.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:UTILITY:Collection;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
```

```
Local PTFP_FEED:UTILITY:Collection &coll;  
  
If &thisFeed <> Null Then  
    &coll = &thisFeed.resetFeedAttributes();  
End-If;
```

Related Topics

- [FeedAttributes property: Feed class](#)

resetFeedSecurities method: Feed class

Syntax

```
resetFeedSecurities()
```

Description

Use this method to reset the FeedSecurities collection.

Parameters

None.

Returns

An empty FeedSecurities collection.

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:Feed;  
import PTFP_FEED:UTILITY:Collection;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒  
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);  
Local PTFP_FEED:UTILITY:Collection &coll;  
  
If &thisFeed <> Null Then  
    &coll = &thisFeed.resetFeedSecurities();  
End-If;
```

Related Topics

- [FeedSecurities property: Feed class](#)

save method: Feed class

Syntax

```
save()
```

Description

Use this method to save the feed definition to the database.

Parameters

None.

Returns

A Boolean value: True if the save was successful, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:UTILITY:Attribute;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", =>
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:UTILITY:Attribute &logo;

If &thisFeed <> Null Then
    &logo = &thisFeed.setAttribute(&thisFeedFactory.Utility.&
FEEDATTRIBUTE_LOGOURL, "", "http://example.com/logo.jpg");
    &succeed = &thisFeed.save();
End-If;
```

saveAs method: Feed class

Syntax

`saveAs(new_ID, CopyPrefData)`

Description

Use this method to save the feed definition to the database using the given new ID.

Parameters

Parameter	Description
<i>new_ID</i>	Specifies the new feed ID as a string.
<i>CopyPrefData</i>	Specifies as a Boolean value whether to copy administrator and user personalization data.

Returns

A new Feed object.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:Feed &newFeed;

If &thisFeed <> Null Then
    &newFeed = &thisFeed.saveAs("new_feed_id", True);
End-If;
```

saveAsTemplate method: Feed class

Syntax

```
saveAsTemplate(new_ID, CopyPrefData)
```

Description

Use this method to save the feed definition to the database as a feed template definition using the given new ID.

Parameters

Parameter	Description
<i>new_ID</i>	Specifies the new feed template ID as a string.
<i>CopyPrefData</i>	Specifies as a Boolean value whether to copy administrator and user personalization data.

Returns

A Boolean value: True if the save was successful, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:Feed &newFeed;

If &thisFeed <> Null Then
    &newFeed = &thisFeed.saveAsTemplate("new_feed_template_id", True);
End-If;
```

setAttribute method: Feed class

Syntax

```
setAttribute(attribute_ID, Value, XML)
```

Description

Use this method to set the properties of a feed attribute. If the attribute ID does not exist, then a new attribute is created. If both *Value* and *XML* are empty, the attribute is deleted.

Parameters

Parameter	Description
<i>attribute_ID</i>	Specifies the ID of the attribute as a string.
<i>Value</i>	Specifies the value of the attribute as a string. Use <i>Value</i> for translatable values such as the copyright and so on.
<i>XML</i>	Specifies the XML value of the attribute as a string. Use <i>XML</i> for nontranslatable values or values longer than 254 characters such as a URL.

Returns

An Attribute object.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:UTILITY:Attribute;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:UTILITY:Attribute &logo;

If &thisFeed <> Null Then
    &logo = &thisFeed.setAttribute(&thisFeedFactory.Utility.⇒
FEEDATTRIBUTE_LOGOURL, "", "http://example.com/logo.jpg");
    &succeed = &thisFeed.save();
End-If;
```

setDataSourceByld method: Feed class

Syntax

```
setDataSourceById(DataType_ID)
```

Description

Use this method to set the data source for the Feed object by data type ID.

Parameters

Parameter	Description
<i>DataType_ID</i>	Specifies the data type ID to set as the data source.

Returns

A DataSource object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.createFeed("feed_ID");
Local PTFP_FEED:DataSource:DataSource &thisDS;

&thisDS = &thisFeed.setDataSourceByID("FEED");
```

Related Topics

- [DataSource Class](#)
This section provides an overview of the DataSource class and discusses:

unpublishFromSites method: Feed class

Syntax

```
unpublishFromSites(Sites)
```

Description

Use this method to remove the published feed definition from the specified sites.

Parameters

Parameter	Description
<i>Sites</i>	Specifies as an array of string the list of sites from which the feed definition is to be removed.

Returns

None.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", =>
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);

If &thisFeed <> Null Then
    &thisFeed.unpublishFromSites(CreateArray("EMPLOYEE", "CUSTOMER"));
End-If;
```

Feed Class Properties

In this section, the Feed class properties are presented in alphabetical order.

Authorized property: Feed class

Description

This property returns a Boolean value indicating whether the current user is authorized to view the feed definition.

This property is read-only.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local boolean &succeed;
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", =>
&thisFeedFactory.Utility.OPERATINGMODE_DELETION);

If &thisFeed <> Null And
    &thisFeed.Authorized Then
    &succeed = &thisFeed.delete();
End-If;
```

CategoryID property: Feed class

Description

Use this property to set or return the category ID for the feed definition as a string.

This property is read/write.

CreateDTTM property: Feed class

Description

This property returns the date and time the feed definition was created as a DateTime value.

This property is read-only.

CreateNode property: Feed class

Description

Use this property to set or return the node on which the feed definition was created, as a string.

This property is read/write.

CreateOpriD property: Feed class

Description

This property returns user ID of the user who created the feed definition, as a string.

This property is read-only.

CreatePortal property: Feed class

Description

Use this property to set or return the portal on which the feed definition was created, as a string.

This property is read/write.

DataSource property: Feed class

Description

Use this property to set or return a DataSource object for the feed definition.

This property is read/write.

Related Topics

- [DataSource Class](#)
This section provides an overview of the DataSource class and discusses:

DataTypeID property: Feed class

Description

This property returns the data type ID for the feed definition's data source, as a string.

This property is read-only.

Description property: Feed class

Description

Use this property to set or return the description of the feed definition as a string.

This property is read/write.

FeedAttributes property: Feed class

Description

Use this property to set or return a FeedAttributes collection.

This property is read/write.

FeedAuthorizationOprID property: Feed class

Description

Use this property to set or return the user ID to be used to execute the Feed object, as a string. This value overrides the current user ID depending on the authorization type.

This property is read/write.

FeedAuthorizationOprPWD property: Feed class

Description

Use this property to set or return the password to be used to execute the Feed object, as a string. This value overrides the password for the current user ID depending on the authorization type.

This property is read/write.

FeedAuthorizationType property: Feed class

Description

Use this property to set or return the authorization type to be used to execute the Feed object, as a string. This value overrides the current authorization type. The values are:

Value	Description
&utility.FEEDAUTHTYPE_DEFAULT	The current authenticated user is used to execute the Feed object.
&utility.FEEDAUTHTYPE_ANONYMOUS	The specified user is used to execute the Feed object for anonymous requests.
&utility.FEEDAUTHTYPE_ALL	The specified user is used to execute the Feed object for all requests.

This property is read/write.

FeedCacheTime property: Feed class

Description

This property is not used currently.

This property is read/write.

FeedCacheType property: Feed class

Description

This property is not used currently.

This property is read/write.

FeedContentUrl property: Feed class

Description

This property returns a string representing the content URL to open the content page of the feed.

This property is read-only.

FeedFactory property: Feed class

Description

Use this property to set or return the FeedFactory object used by this Feed object.

This property is read/write.

Related Topics

- [FeedFactory Class](#)
This section provides an overview of the FeedFactory class and discusses:

FeedFormat property: Feed class

Description

Use this property to set or return the feed format as a string. The values are:

Value	Description
&utility.FEEDFORMAT_ATOM10	Specifies the Atom 1.0 format.

This property is read/write.

FeedSecurities property: Feed class

Description

Use this property to set or return a FeedSecurities collection.

This property is read/write.

FeedSecurityType property: Feed class

Description

Use this property to set or return the security type for the feed as a string. The values are

Value	Description
&utility.FEEDSECUTYPE_PUBLIC	Specifies public access to the feed.
&utility.FEEDSECUTYPE_SELECTED	Specifies role or permission list based access to the feed. The role or permission list is stored with the feed definition
&utility.FEEDSECUTYPE_REALTIME	Specifies real-time security in which the DataSource object is used to validate user access when the feed is requested.

This property is read/write.

FeedTemplate property: Feed class

Description

Use this property to set or return a Boolean value indicating whether the current feed definition is a feed template definition.

This property is read/write.

Related Topics

- [FeedTemplate property: Feed class](#)
- [FEEDTEMPLATE_YES property: Utility class](#)
- Feed Publishing Framework: Feed Templates

FeedUrl property: Feed class

Description

This property returns a string representing the feed URL to open the feed document.

This property is read-only.

HasAdminParams property: Feed class

Description

This property returns a Boolean value indicating whether the feed definition has administrator-specified data source parameters.

This property is read-only.

HasUserParams property: Feed class

Description

This property returns a Boolean value indicating whether the feed definition has user-specified data source parameters.

This property is read-only.

IBOperationName property: Feed class

Description

Use this property to set or return a string representing the Integration Broker service operation name that handles requests for this feed.

This property is read/write.

ID property: Feed class

Description

This property returns the ID for the feed definition as a string.

This property is read-only.

LastPubDTTM property: Feed class

Description

This property returns the DateTime value at which the data source's execute method was called to publish feed messages to the Integration Broker queues—that is, the last publication date and time for the feed. The initial value for this property is set to 01-01-1900 12:00AM.

This property is not valid for real-time feeds or for scheduled, generic Integration Broker feeds. It is updated for all other types of scheduled feeds.

This property is read-only.

LastUpdDTTM property: Feed class

Description

This property returns the last update date and time for the feed definition, as a DateTime value.

This property is read-only.

LastUpdOprID property: Feed class

Description

This property returns the user ID of the user to have last updated the feed definition, as string.

This property is read-only.

NamespaceID property: Feed class

Description

Use this property to set or return the name space ID for the feed definition, as a string. The default name space ID is based on the feed ID as follows: PTFP_node_name_feed_ID.

This property is read/write.

ObjectType property: Feed class

Description

This property returns the object type for the feed definition as a string. For a feed, this is a constant value: Feed.

This property is read-only.

OperatingMode property: Feed class

Description

This property returns the operating mode for the Feed object as a number. The values are:

Numeric Value	Constant Value	Description
0	&utility.OPERATINGMODE_DEF AULT	A Feed object in this mode allows all operations such as save, delete, and so on.
10	&utility.OPERATINGMODE_EXE CUTION	A Feed object in this mode is for execution to get the feed document. Other operations such as save and delete are not allowed.
11	&utility.OPERATINGMODE_EXE CUTION_NOENTRY	A Feed object in this mode is for execution to get a feed document with no feed entries. Otherwise, this mode is the same as the OPERATINGMODE_EXECUTION mode.
100	&utility.OPERATINGMODE_AUT HORIZATION	A Feed object in this mode is for validating user access to the feed. Most other operations such as execute, save, and delete are not allowed.
1000	&utility.OPERATINGMODE_DEL ETION	A Feed object in this mode is to delete the feed definition. Most other operations such as execute and save are not allowed.

This property is read-only.

OwnerId property: Feed class

Description

Use this property to set or return object owner ID as a string. For example, for delivered feed definitions, the owner ID is set to PT, CPA, and so on.

This property is read/write.

PublishedInSites property: Feed class

Description

This property returns the list of sites in which this feed has been published as an array of string.

This property is read-only.

Title property: Feed class

Description

Use this property to set or return the title of the feed definition as a string.

This property is read/write.

Utility property: Feed class

Description

Use this property to set or return the Utility object used by the Feed object.

This property is read/write.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.getFeed("feed_ID", ⇒
&thisFeedFactory.Utility.OPERATINGMODE_DEFAULT);
Local PTFP_FEED:UTILITY:Utility &utility;

If &thisFeed <> Null Then
    &utility = &thisFeed.Utility;
End-If;
```

Related Topics

- [Utility Class](#)
This section provides an overview of the Utility class and discusses:

FeedFactory Class

This section provides an overview of the FeedFactory class and discusses:

- FeedFactory class constructor.
- FeedFactory class methods.
- FeedFactory class properties.

The FeedFactory class provides methods for instantiating objects—such as, Feed objects, DataSource objects, Link objects, and Link collections—rather than instantiating these objects directly. Using the methods of the FeedFactory class avoids creating invalid objects. The FeedFactory class also provides methods to search feed definitions and return the search results as a feed HoverMenu object or OPML file

FeedFactory Class Constructor

This section presents the constructor for the FeedFactory class.

FeedFactory method: FeedFactory class

Example

```
import PTFP_FEED:FeedFactory;

Local PTFP_FEED:FeedFactory &PTFP_FEED_FACTORY = create
PTFP_FEED:FeedFactory();
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

FeedFactory Class Methods

In this section, the FeedFactory class methods are presented in alphabetical order.

convertFeedLinksToHoverMenu method: FeedFactory class

Syntax

```
convertFeedLinksToHoverMenu(&Links, Flat)
```

Description

Use this method to convert a feed Link collection to a HoverMenu object.

Parameters

Parameter	Description
<i>&Links</i>	Specifies the feed links as a Link collection.
<i>Flat</i>	A Boolean value that indicates whether to organize links in subfolders based on their categories (False), or into a root folder if there are no categories (True). The default value is False.

Returns

A HoverMenu object if successful.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:SearchRequest;
import PTFP_FEED:UTILITY:Collection;
import PTFP_FEED:UTILITY:HoverMenu;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Collection &results;
Local PTFP_FEED:UTILITY:SearchRequest &request;
Local PTFP_FEED:UTILITY:HoverMenu &menu;

&request = create PTFP_FEED:UTILITY:SearchRequest("SearchResults");
&request.PortalName = %Portal;
&results = &thisFeedFactory.getFeedLinks(&request);
&menu = &thisFeedFactory.convertFeedLinksToHoverMenu(&results, True);
```

convertFeedLinksToOPML method: FeedFactory class

Syntax

```
convertFeedLinksToOPML(&Links, Flat)
```

Description

Use this method to convert a feed Link collection to an OPMLDoc object.

Parameters

Parameter	Description
<i>&Links</i>	Specifies the feed links as a Link collection.

Parameter	Description
<i>Flat</i>	A Boolean value that indicates whether to organize links in subfolders based on their categories (False), or into a root folder if there are no categories (True). The default value is False.

Returns

An OPMLDoc object if successful.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:SearchRequest;
import PTFP_FEED:UTILITY:Collection;
import PTFP_FEED:XML_OPML:OPMLDoc;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Collection &results;
Local PTFP_FEED:UTILITY:SearchRequest &request;
Local PTFP_FEED:XML_OPML:OPMLDoc &opmlDoc;

&request = create PTFP_FEED:UTILITY:SearchRequest("SearchResults");
&request.PortalName = %Portal;
&results = &thisFeedFactory.getFeedLinks(&request);
&opmlDoc = &thisFeedFactory.convertFeedLinksToOPML(&results, True);
```

createFeed method: FeedFactory class

Syntax

```
createFeed(feed_ID)
```

Description

Use this method to create a new Feed object with the given ID.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the feed ID of the new feed definition.

Returns

A Feed object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:Feed &thisFeed = &thisFeedFactory.createFeed("feed_ID");
```

Related Topics

- [Feed Class](#)
This section provides an overview of the Feed class and discusses:

deleteFeed method: FeedFactory class

Syntax

```
deleteFeed(feed_ID)
```

Description

Use this method to delete the feed definition.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the feed definition to be deleted.

Returns

A Boolean value: True if the feed deletion was successful, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local boolean &succeed = &thisFeedFactory.deleteFeed("feed_ID");
```

Related Topics

- [delete method: Feed class](#)

genFeedUrl method: FeedFactory class

Syntax

```
genFeedUrl(feed_ID, OperationName, SecurityType)
```

Description

Use this method to generate the feed URL based on the feed ID and Integration Broker service operation name. If the service operation name is empty, the default service operation, PTFP_GETFEED, is used.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the ID for the feed definition as a string.
<i>OperationName</i>	Specifies the Integration Broker service operation name as a string. The default service operation is PTFP_GETFEED.
<i>SecurityType</i>	Specifies the security type for the feed as a string.

Returns

A feed URL as a string.

Example

```
import PTFP_FEED:FeedFactory;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local string &url = &thisFeedFactory.genFeedUrl("feed_ID", "PTFP_GETFEED", ⇒  
&thisFeedFactory.Utility.FEEDSECUTYPE_PUBLIC);
```

Related Topics

- [FEEDSECUTYPE_PUBLIC property: Utility class](#)
- [FEEDSECUTYPE_REALTIME property: Utility class](#)
- [FEEDSECUTYPE_SELECTED property: Utility class](#)

genUniqueFeedId method: FeedFactory class

Syntax

```
genUniqueFeedId(seed)
```

Description

Use this method to generate an unique feed ID from the specified seed string.

Parameters

Parameter	Description
<i>seed</i>	Specifies the seed as a string.

Returns

A feed ID as a string.

Example

```
import PTFP_FEED:FeedFactory;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local string &id = &thisFeedFactory.genUniqueFeedId("feed_ID");
```

getAllPagedFeedLinks method: FeedFactory class

Syntax

```
getAllPagedFeedLinks(feed_ID, fromDTTM, allLanguages)
```

Description

Use this method to get all the paged feed URLs for the specified scheduled feed definition starting from the specified date and time. If *allLanguages* is set to True, then feed URLs corresponding to all languages are also provided.

This method returns an array of paged feed URLs; each URL represents a specific page (message segment) of the paged feed.

Note

This method is supported for scheduled feeds only.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the ID for the scheduled feed definition as a string.
<i>fromDTTM</i>	Specifies the start date and time as a DateTime value.
<i>allLanguages</i>	A Boolean value that indicates whether to provide paged feed URLs for all languages.

Returns

An array of string.

Example

```
import PTFP_FEED:FeedFactory;

Local PTFP_FEED:FeedFactory &feedFactory_inst;
Local datetime &fromDttm;
Local array of string &feedLinks;

&feedFactory_inst = create PTFP_FEED:FeedFactory();
&fromDttm = DateTimeValue("01/01/1900 00:00:00");
```

```
&feedLinks = &feedFactory_inst.getAllPagedFeedLinks("ADMN_USER_PROFILE", ⇒  
&fromDttm, True);
```

Related Topics

- Feed Publishing Framework: Paged Feeds
- [getRelativePageLinkForFeed method: FeedFactory class](#)

getCategory method: FeedFactory class

Syntax

```
getCategory(category_ID, ActiveOnly)
```

Description

Use this method to retrieve all of the category information for a category ID. The information is returned as an array of string with four elements.

Parameters

Parameter	Description
<i>category_ID</i>	Specifies the category ID as a string.
<i>ActiveOnly</i>	Indicates as a Boolean value whether to retrieve the description only if the category is active.

Returns

An array of string with four elements:

- Category ID
- Short description
- Long description
- Status

Example

```
import PTFP_FEED:FeedFactory;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local array of string &catagories = &thisFeedFactory.getCategory⇒  
("category_ID", True);
```

getDataSource method: FeedFactory class

Syntax

```
getDataSource(DataType_ID)
```

Description

Use this method to create a DataSource object with the given data type ID.

Parameters

None.

Parameter	Description
<i>DataType_ID</i>	Specifies the data type ID for the data source, as a string.

Returns

A DataSource object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS;

&thisDS = &thisFeedFactory.getDataSource("FEED");
```

Related Topics

- [DataSource Class Constructor](#)
This section presents the constructor for the DataSource class. Use the FeedFactory class to create an instance of the DataSource class.

getFeed method: FeedFactory class

Syntax

```
getFeed(feed_ID, mode)
```

Description

Use this method to create a Feed object with the given feed ID.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the feed ID as a string.
<i>mode</i>	Specifies the operating mode for the feed as a number. See the values below.

The values for the *mode* parameter are:

Numeric Value	Constant Value	Description
0	&utility.OPERATINGMODE_DEFAULT	A Feed object in this mode allows all operations such as save, delete, and so on.
10	&utility.OPERATINGMODE_EXECUTION	A Feed object in this mode is for execution to get the feed document. Other operations such as save and delete are not allowed.
11	&utility.OPERATINGMODE_EXECUTION_NOENTRY	A Feed object in this mode is for execution to get a feed document with just an empty feed header (that is, without feed entries). Otherwise, this mode is the same as the OPERATINGMODE_EXECUTION mode.
100	&utility.OPERATINGMODE_AUTHORIZATION	A Feed object in this mode is for validating user access to the feed. Most other operations such as execute, save, and delete are not allowed.
1000	&utility.OPERATINGMODE_DELETION	A Feed object in this mode is to delete the feed definition. Most other operations such as execute and save are not allowed.

Returns

A Feed object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:Feed;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:Feed &thisFeed;

&thisFeed = &thisFeedFactory.getFeed("feed_ID", &thisFeedFactory.Utility.⇒
OPERATINGMODE_DEFAULT);
```

Related Topics

- [Feed Class Constructor](#)
This section presents the constructor for the Feed class. Use the FeedFactory class to create an instance of the Feed class.
- [OPERATINGMODE_AUTHORIZATION property: Utility class](#)
- [OPERATINGMODE_DEFAULT property: Utility class](#)
- [OPERATINGMODE_DELETION property: Utility class](#)
- [OPERATINGMODE_EXECUTION property: Utility class](#)

- [OPERATINGMODE_EXECUTION_NOENTRY property: Utility class](#)

getFeedDoc method: FeedFactory class

Syntax

```
getFeedDoc(&feedRequest)
```

Description

Use this method to get the feed document of the feed specified by the FeedRequest object.

Parameters

Parameter	Description
<i>&feedRequest</i>	Specifies the feed request as a FeedRequest object.

Returns

A FeedDoc object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:XML_FEED:FeedDoc;
import PTFP_FEED:UTILITY:FeedRequest;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:FeedRequest &request;
Local PTFP_FEED:XML_FEED:FeedDoc &thisFeedDoc;

&request = create PTFP_FEED:UTILITY:FeedRequest("FeedRequest");
&request.FeedID = "feed_ID";
&thisFeedDoc = &thisFeedFactory.getFeedDoc(&request);
```

Related Topics

- [execute method: Feed class](#)
- [FeedDoc Class](#)
This section provides an overview of the FeedDoc class and discusses:

getFeedLink method: FeedFactory class

Syntax

```
getFeedLink(feed_ID)
```

Description

Use this method to create a Link object for the specified feed ID.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the feed ID as a string.

Returns

A Link object if successful, null otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:Link;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Link &thisFeedLink;

&thisFeedLink = &thisFeedFactory.getFeedLink("feed_ID");
```

getFeedLinks method: FeedFactory class

Syntax

```
getFeedLinks(&searchRequest)
```

Description

Use this method to search feed definitions based on user permissions and the search criteria specified in the SearchRequest object. The method returns a collection of feed Link objects. The list is sorted by the feed definition's last updated time by default.

Parameters

Parameter	Description
<i>&searchRequest</i>	Specifies the search criteria as a SearchRequest object.

Returns

A Link collection.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:SearchRequest;
import PTFP_FEED:UTILITY:Collection;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Collection &results;
Local PTFP_FEED:UTILITY:SearchRequest &request;

&request = create PTFP_FEED:UTILITY:SearchRequest("SearchResults");
```

```
&request.PortalName = %Portal;  
&results = &thisFeedFactory.getFeedLinks(&request);
```

getFeedTemplates method: FeedFactory class

Syntax

```
getFeedTemplates(&searchRequest)
```

Description

Use this method to search feed template definitions based on user permissions and the search criteria specified in the SearchRequest object. The method returns a collection of feed template definitions. The list is sorted by the feed template definition's last updated time by default.

Parameters

Parameter	Description
<i>&searchRequest</i>	Specifies the search criteria as a SearchRequest object.

Returns

A collection of Feed objects.

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:UTILITY:SearchRequest;  
import PTFP_FEED:UTILITY:Collection;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:UTILITY:SearchRequest &request;  
Local PTFP_FEED:UTILITY:Collection &feedTemplates;  
Local array of string &thisDSS;  
  
&request = create PTFP_FEED:UTILITY:SearchRequest("SearchResults");  
&request.DataTypeID = "datatype_id";  
&thisDSS = CreateArray("datasourcesetting_name", "datasourcesetting_value");  
&request.DataSourceSettings.Push(&thisDSS);  
&feedTemplates = &PTFP_FEED_FACTORY.getFeedTemplates(&request);
```

getRelatedFeedsHoverMenu method: FeedFactory class

Syntax

```
getRelatedFeedsHoverMenu(&Requests)
```

Description

Use this method to create a related feeds HoverMenu object from the specified FeedRequest objects.

Parameters

Parameter	Description
<i>&Requests</i>	Specifies the related feeds requests as an array of RelatedFeedsRequest objects.

Returns

A HoverMenu object.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:RelatedFeedsRequest;
import PTFP_FEED:UTILITY:HoverMenu;
import PTFP_FEED:UTILITY:Collection;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Collection &results;
Local PTFP_FEED:UTILITY:RelatedFeedsRequest &request;
Local PTFP_FEED:UTILITY:HoverMenu &menu;

&request = create PTFP_FEED:UTILITY:RelatedFeedsRequest("FEED");
&request.DataTypeID = "FEED";
&menu = &thisFeedFactory.getRelatedFeedsHoverMenu(CreateArray(&request));
```

getRelativePageLinkForFeed method: FeedFactory class

Syntax

```
getRelativePageLinkForFeed(feed_ID, currentFeedURL, linkOption, fromDTTM)
```

Description

Use this method to get the specified relative paged feed URL (first, previous, next or last) for the current paged feed URL.

This method returns a paged feed URL as a string.

Note

This method is supported for scheduled feeds only.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the ID for the scheduled feed definition as a string.
<i>currentFeedURL</i>	Specifies the paged feed URL for the current page as a string.
<i>linkOption</i>	Specifies which page link as a string. See the values below.
<i>fromDTTM</i>	Specifies the start date and time as a DateTime value.

Value	Description
&utlity.LINKTYPE_FIRST	Indicates the first page of the paged feed.
&utlity.LINKTYPE_PREVIOUS	Indicates the previous page of the paged feed.
&utlity.LINKTYPE_NEXT	Indicates the next page of the paged feed.
&utlity.LINKTYPE_LAST	Indicates the last page of the paged feed.

Returns

A string.

Example

```

import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:Utility;
import PTFP_FEED:UTILITY:Link;

Local PTFP_FEED:FeedFactory &feedFactory_inst;
Local PTFP_FEED:UTILITY:Utility &utility;
Local PTFP_FEED:UTILITY:Link &link;

Local datetime &fromDttm;
Local string &feedLink, &nextFeedLink, &prevFeedLink, &firstFeedLink, ⇒
&lastFeedLink;

&feedFactory_inst = create PTFP_FEED:FeedFactory();
&utility = &feedFactory_inst.Utility;
&fromDttm = DateTimeValue("01/01/1900 00:00:00");
&link = &feedFactory_inst.getFeedLink("ADMN_USER_PROFILE");
If All(&link) Then
    &feedLink = &link.Href;
    &nextFeedLink = &feedFactory_inst.getRelativePageLinkForFeed⇒
("ADMN_USER_PROFILE", &feedLink, &utility.LINKTYPE_NEXT, &fromDttm);
    &prevFeedLink = &feedFactory_inst.getRelativePageLinkForFeed⇒
("ADMN_USER_PROFILE", &feedLink, &utility.LINKTYPE_PREVIOUS, &fromDttm);
    &firstFeedLink = &feedFactory_inst.getRelativePageLinkForFeed⇒
("ADMN_USER_PROFILE", &feedLink, &utility.LINKTYPE_FIRST, &fromDttm);
    &lastFeedLink = &feedFactory_inst.getRelativePageLinkForFeed⇒
("ADMN_USER_PROFILE", &feedLink, &utility.LINKTYPE_LAST, &fromDttm);
End-If;

```

Related Topics

- Feed Publishing Framework: Paged Feeds
- [getAllPagedFeedLinks method: FeedFactory class](#)

FeedFactory Class Properties

In this section, the FeedFactory class properties are presented in alphabetical order.

DataSources property: FeedFactory class

Description

This property returns a collection of all data source definitions (a collection of DataSource objects).

This property is read-only.

Related Topics

- [DataSource Class](#)
This section provides an overview of the DataSource class and discusses:

Feeds property: FeedFactory class

Description

This property returns a collection of all feed definitions (a collection of Feed objects).

This property is read-only.

Related Topics

- [Feed Class](#)
This section provides an overview of the Feed class and discusses:

Utility property: FeedFactory class

Description

This property returns the Utility object used by this FeedFactory object.

This property is read-only.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:UTILITY:Utility &utility;

&utility = &thisFeedFactory.Utility;
```

Related Topics

- [Utility Class](#)

This section provides an overview of the Utility class and discusses:

DataSource Class

This section provides an overview of the DataSource class and discusses:

- DataSource class constructor.
- DataSource class methods.
- DataSource class properties.

The DataSource class is an abstract base class and should not be used directly. All feed data sources should extend this class.

DataSource Class Constructor

This section presents the constructor for the DataSource class. Use the FeedFactory class to create an instance of the DataSource class.

DataSource method: DataSource class

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
```

Related Topics

- [getDataSource method: FeedFactory class](#)
- [Constructors](#)

The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.

- [Import Declarations](#)

Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

DataSource Class Methods

In this section, the DataSource class methods are presented in alphabetical order.

addParameter method: DataSource class

Syntax

```
addParameter(DSparam_ID, Value)
```

Description

Use this method to create a DataSourceParameter object with the given ID and value.

Parameters

Parameter	Description
<i>DSparam_ID</i>	Specifies the ID of the data source parameter as a string.
<i>Value</i>	Specifies the value of the data source parameter as a string.

Returns

A DataSourceParameter object if successful, false otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;
import PTFP_FEED:DataSource:DataSourceParameter;
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local PTFP_FEED:DataSource:DataSourceParameter &thisDSP;
If (&thisDS <> Null) Then
    Local PTFP_FEED:UTILITY:Utility &utility = &thisDS.Utility;
    &thisDSP = &thisDS.addParameter(&utility.DSPARAMETER_MAXROW, "0");
    If (&thisDSP <> Null) Then
        &thisDSP.Name = &thisDSP.ID;
        &thisDSP.Description = "Description";
        &thisDSP.FieldType = &utility.FIELDTYPE_NUMBER;
        &thisDSP.DefaultValue = "10";
        &thisDSP.Value = &thisDSP.DefaultValue;
        &thisDSP.Required = True;
    End-If;
End-If;
```

Related Topics

- [DataSourceParameter Class](#)
This section provides an overview of the DataSourceParameter class and discusses:
- [DSPARAMETER_MAXROW property: Utility class](#)
- [DSPARAMETER_SF_MAXMINUTES property: Utility class](#)

- [DSPARAMETER_SF_PAGING property: Utility class](#)

equals method: DataSource class

Syntax

`equals(&Object)`

Description

Use this method to evaluate the equivalency of an object with the current data source. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current DataSource object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Related Topics

- [ID property: DataSource class](#)
- [ObjectType property: DataSource class](#)

getAttributeById method: DataSource class

Syntax

`getAttributeById(attribute_ID)`

Description

Use this method to return the default feed attribute value of this data type by ID.

Parameters

Parameter	Description
<i>attribute_ID</i>	Specifies the ID of the attribute as a string.

Returns

An Attribute object if successful, null otherwise.

Related Topics

- [FEEDATTRIBUTE_AUTHOR property: Utility class](#)
- [FEEDATTRIBUTE_CLOUD property: Utility class](#)

- [FEEDATTRIBUTE_COMPLETE property: Utility class](#)
- [FEEDATTRIBUTE_CONTRIBUTOR property: Utility class](#)
- [FEEDATTRIBUTE_COPYRIGHT property: Utility class](#)
- [FEEDATTRIBUTE_EXPIRES property: Utility class](#)
- [FEEDATTRIBUTE_ICONURL property: Utility class](#)
- [FEEDATTRIBUTE_LOGOURL property: Utility class](#)
- [FEEDATTRIBUTE_MANAGINGEDITOR property: Utility class](#)
- [FEEDATTRIBUTE_MAXAGE property: Utility class](#)
- [FEEDATTRIBUTE_PERSINSTRUCTION property: Utility class](#)
- [FEEDATTRIBUTE_RATING property: Utility class](#)
- [FEEDATTRIBUTE_SKIPDAYS property: Utility class](#)
- [FEEDATTRIBUTE_SKIPHOURS property: Utility class](#)
- [FEEDATTRIBUTE_TEXTINPUT property: Utility class](#)
- [FEEDATTRIBUTE_TTL property: Utility class](#)
- [FEEDATTRIBUTE_WEBMASTER property: Utility class](#)
- [FEEDATTRIBUTE_XSL property: Utility class](#)

getContentType method: DataSource class

Syntax

`getContentType()`

Description

Use this method to return the content URL of the feed as a string.

Parameters

None.

Returns

The content URL of the feed as a string.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local string &FeedContentType = "";
If (&thisDS <> Null) Then
    &FeedContentType = &thisDS.getContentType();
End-If;
```

getDataSecurity method: DataSource class

Syntax

```
getDataSecurity()
```

Description

Use this method to return the role- and permission list-based data security as a collection of Authorization objects.

Parameters

None.

Returns

Null if the data security type is public, otherwise a collection of Authorization objects. Each Authorization object represents a role or permission list that has access to the data.

getParameterById method: DataSource class

Syntax

```
getParameterById(DSP_ID)
```

Description

Use this method to return the DataSourceParameter object with the given ID.

Parameters

Parameter	Description
<i>DSP_ID</i>	Specifies the ID of the data source parameter as a string.

Returns

A DataSourceParameter object, null if the data source parameter with the specified ID does not exist.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;
import PTFP_FEED:DataSource:DataSourceParameter;
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local PTFP_FEED:DataSource:DataSourceParameter &thisDSP;
If (&thisDS <> Null) Then
```

```
Local PTFP_FEED:UTILITY:Utility &utility = &thisDS.Utility;  
&thisDSP = &thisDS.getParameterById(&utility.DSPARAMETER_MAXROW);  
/* Do some processing with the data source parameter here */  
End-If;
```

Related Topics

- [DataSourceParameter Class](#)
This section provides an overview of the DataSourceParameter class and discusses:
- [DSPARAMETER_MAXROW property: Utility class](#)
- [DSPARAMETER_SF_MAXMINUTES property: Utility class](#)
- [DSPARAMETER_SF_PAGING property: Utility class](#)

getParameterDetail method: DataSource class

Syntax

```
getParameterDetail()
```

Description

Use this method to return the detailed explanation text of all data source parameters for the specific combination of data source settings.

Parameters

None.

Returns

A string with the detailed explanation text in HTML.

getSettingById method: DataSource class

Syntax

```
getSettingById(DSS_ID)
```

Description

Use this method to return a DataSourceSetting object for the given ID.

Parameters

Parameter	Description
<i>DSS_ID</i>	Specifies the ID of the data source setting as a string.

Returns

A DataSourceSetting object if successful, null if the data source setting with the specified ID does not exist.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;
import PTFP_FEED:DataSource:DataSourceSetting;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local PTFP_FEED:DataSource:DataSourceSetting &thisDSS;
If (&thisDS <> Null) Then
    &thisDSS = &thisDS.getSettingById("DSS_ID");
    /* Do some processing with the data source setting here */
End-If;
```

Related Topics

- [DataSourceSetting Class](#)

This section provides an overview of the DataSourceSetting class and discusses:

getSettingDetail method: DataSource class

Syntax

```
getSettingDetail()
```

Description

Use this method to return the detailed explanation text of all data source settings.

Parameters

None.

Returns

A string with the detailed explanation text in HTML.

isCurrentUserAdmin method: DataSource class

Syntax

```
isCurrentUserAdmin()
```

Description

Use this method to determine whether the current user has administrator access to the feed data.

Parameters

None.

Returns

A Boolean value: True if the user has administrator access, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local boolean &authorized = False;
If (&thisDS <> Null) Then
    &authorized = &thisDS.isCurrentUserAdmin();
    /* Do some processing here */
End-If;
```

isCurrentUserAuthorized method: DataSource class

Syntax

```
isCurrentUserAuthorized()
```

Description

Use this method to determine whether the current user is authorized to view the feed data.

Parameters

None.

Returns

A Boolean value: True if the user is authorized to view the feed data, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local boolean &authorized = False;
If (&thisDS <> Null) Then
    &authorized = &thisDS.isCurrentUserAuthorized();
    /* Do some processing here */
End-If;
```

onDelete method: DataSource class

Syntax

```
onDelete()
```

Description

Use this method to update related data prior to deleting a feed definition. Raise an exception to stop the deleting action.

Parameters

None.

Returns

None.

onSave method: DataSource class

Syntax

```
onSave()
```

Description

Use this method to update related data after a feed definition has been saved.

Parameters

None.

resetParameters method: DataSource class

Syntax

```
resetParameters()
```

Description

Use this method to reset the Parameters collection.

Parameters

None.

Returns

An empty DataSourceParameter collection.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:DataSource:DataSource;
import PTFP_FEED:UTILITY:Collection;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:DataSource:DataSource &thisDS = &thisFeedFactory.⇒
getDataSource("DS_ID");
Local PTFP_FEED:UTILITY:Collection &thisList;

If (&thisDS <> Null) Then
    &thisList = &thisDS.resetParameters();
End-If;
```

Related Topics

- [Parameters property: DataSource class](#)

DataSource Class Properties

In this section, the DataSource class properties are presented in alphabetical order.

AdminPersonalizationPage property: DataSource class

Description

Use this property to set or return a PSComponent object representing a data type-specific administrator personalization page for entering administrator-specified data source parameter values.

This property is read/write.

AllowCustomParameters property: DataSource class

Description

This property indicates whether to allow user add or delete data source parameters, as a Boolean value. The default false, custom parameters are not allowed.

This property is read-only.

AllowRealTimeFeedSecurity property: DataSource class

Description

This property indicates whether to allow real-time feed security, as a Boolean value. The default false, real-time feed security is not allowed.

This property is read-only.

DataSourceType property: DataSource class

Description

This property returns the data source type as a string. The default value is a constant: `BaseDataSource`.

This property is read-only.

DefaultFeedAttributes property: DataSource class

Description

Use this property to set or return the default feed attributes of this data type as an `Attribute` collection.

This property is read/write.

DefaultIBOperationName property: DataSource class

Description

This property returns a string representing the name of the default service operation that handles feed requests of this data type.

This property is read-only.

Description property: DataSource class

Description

Use this property to set or return the description of the data type as a string.

This property is read/write.

HasParameters property: DataSource class

Description

This property whether the data source has parameters, as a Boolean value.

This property is read-only.

HasSettings property: DataSource class

Description

This property whether the data source has settings, as a Boolean value.

This property is read-only.

IBOperations property: DataSource class

Description

Use this property to set or return an IBOperation collection with the service operation names that could be used to handle feed requests of this feed type.

This property is read/write.

ID property: DataSource class

Description

This property returns the ID for the data type as a string.

This property is read-only.

LongDescription property: DataSource class

Description

Use this property to set or return the long description of the data type as a string.

This property is read/write.

ObjectType property: DataSource class

Description

This property returns the object type for the data source as a string. For a data source, this is a constant value: DataSource.

This property is read-only.

Parameters property: DataSource class

Description

This property returns the DataSourceParameter collection of this data source.

This property is read-only.

ParametersCompleted property: DataSource class

Description

This property indicates whether all required data source parameters have values, as a Boolean value.

This property is read-only.

Parent property: DataSource class

Description

Use this property to set or return the Feed object that use this DataSource object to collect data.

This property is read/write.

Related Topics

- [Feed Class](#)

This section provides an overview of the Feed class and discusses:

PortalSpecificPersonalization property: DataSource class

Description

This property returns a Boolean value indicating whether the personalization data is portal specific. The default is False, personalization data is not portal specific.

This property is read-only.

Settings property: DataSource class

Description

This property returns the DataSourceSetting collection.

This property is read-only.

Related Topics

- [DataSourceSetting Class](#)

This section provides an overview of the DataSourceSetting class and discusses:

SettingsCompleted property: DataSource class

Description

This property returns a Boolean value indicating whether all required data source settings are selected.

This property is read-only.

UserPersonalizationPage property: DataSource class

Description

Use this property to set or return a PSComponent object representing a data type-specific user personalization page for entering user specified data source parameter values.

This property is read/write.

Utility property: DataSource class

Description

Use this property to set or return the Utility object that used by this DataSource object. By default, the parent's (that is, the feed's) Utility object is used.

This property is read/write.

Related Topics

- [Utility Class](#)
This section provides an overview of the Utility class and discusses:

DataSourceParameter Class

This section provides an overview of the DataSourceParameter class and discusses:

- DataSourceParameter class constructor.
- DataSourceParameter class methods.
- DataSourceParameter class properties.

The DataSourceParameter class represent a data source parameter that used by the DataSource object to refine the feed data selection.

DataSourceParameter Class Constructor

This section presents the constructor for the DataSourceParameter class.

DataSourceParameter method: DataSourceParameter class

Example

```
import PTFP_FEED:DataSource:DataSourceParameter;  
  
Local PTFP_FEED:DataSource:DataSourceParameter &DSP = create  
PTFP_FEED:DataSource:⇒  
DataSourceParameter("DSP_ID", &Parent_DS);
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

DataSourceParameter Class Methods

In this section, the DataSourceParameter class methods are presented in alphabetical order.

addUserValue method: DataSourceParameter class

Syntax

```
addUserValue(DSPValue_ID, Value)
```

Description

Use this method to add a user value to this data source parameter.

Parameters

Parameter	Description
<i>DSPValue_ID</i>	Specifies the ID of the user value as a string.
<i>Value</i>	Specifies the value of the user value as a string.

Returns

A DataSourceParameterValue object if successful, false otherwise.

Related Topics

- [DataSourceParameterValue Class Constructor](#)
This section presents the constructor for the DataSourceParameterValue class.

clone method: DataSourceParameter class

Syntax

```
clone()
```

Description

Use this method to make a copy of this DataSourceParameter object.

Parameters

None.

Returns

A DataSourceParameter object exactly matching the current object.

equals method: DataSourceParameter class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current data source parameter. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current DataSourceParameter object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Related Topics

- [ID property: DataSourceParameter class](#)
- [ObjectType property: DataSourceParameter class](#)

resetUserValues method: DataSourceParameter class

Syntax

```
resetUserValues()
```

Description

Use this method to reset the UserValues collection.

Parameters

None.

Returns

An empty UserValues collection if successful, null otherwise.

Related Topics

- [UserValues property: DataSourceParameter class](#)

setRangeFromFieldTranslates method: DataSourceParameter class

Syntax

```
setRangeFromFieldTranslates(FieldName)
```

Description

Use this method to auto-populate the range values based on the translate values for the specified field.

Parameters

Parameter	Description
<i>FieldName</i>	Specifies the name of the field as a string.

Returns

None.

validateValue method: DataSourceParameter class

Syntax

```
validateValue(Value, CheckPrompt)
```

Description

Use this method to validate the value according to its field type, the edit type, and the usage type. Date or date time values are translated to the standard format as a string. Exceptions or errors are raised for invalid values.

Parameters

Parameter	Description
<i>Value</i>	Specifies the value to be validated as a string.
<i>CheckPrompt</i>	Specifies a Boolean value indicating whether the value should be checked against the valid values list of this data source parameter. The type of check depends on the edit type of this data source parameter, the valid values list could be a user-specified values list, translate values of a field, or values in a prompt table. When <i>CheckPrompt</i> is True, check the value; when False, check the data type of the value only.

Returns

A string with the validated value.

DataSourceParameter Class Properties

In this section, the DataSourceParameter class properties are presented in alphabetical order.

AllowChangesToRequired property: DataSourceParameter class

Description

Use this property to set or return a Boolean value indicating whether it is allowed to change the required flag of this parameter.

This property is read/write.

DefaultValue property: DataSourceParameter class

Description

Use this property to set or return a string representing the default value for this data source parameter.

This property is read/write.

DefaultValueForDisplay property: DataSourceParameter class

Description

This property returns a string representing the default value for a data source parameter for display purposes. This is the same as the DefaultValue property except that a date value is in the user-preferred format.

This property is read-only.

Description property: DataSourceParameter class

Description

Use this property to set or return the description of the data source parameter as a string.

This property is read/write.

EditType property: DataSourceParameter class

Description

Use this property to set or return the table edit type of the data source parameter, as a number. The values are:

Numeric Value	Constant Value	Description
1	&utility.EDITTYPE_NOTABLEEDIT	This is the default edit type. A valid values list can be specified using the UserValues collection.

Numeric Value	Constant Value	Description
2	&utility.EDITTYPE_PROMPTTABLE	This data source parameter takes value from a prompt table. Only a SQL table or SQL view can be used as the prompt table.
3	&utility.EDITTYPE_TRANSLATE	This data source parameter only takes values specific in the Range array of this data source parameter
4	&utility.EDITTYPE_YESNO	This data source parameter only takes a Yes or No value.

This property is read/write.

EvaluatedValue property: DataSourceParameter class

Description

This property returns a string representing the evaluated value of the data source parameter. This is the same as the Value property except that a system variable is evaluated to its current runtime value.

This property is read-only.

FieldType property: DataSourceParameter class

Description

Use this property to set or return the field type as a number. The values are:

Numeric Value	Constant Value	Description
0	&utility.FIELDTYPE_CHARACTER	Character field
1	&utility.FIELDTYPE_LONGCHARACTER	Long character field
2	&utility.FIELDTYPE_NUMBER	Number field
3	&utility.FIELDTYPE_SIGNEDNUMBER	Signed number field
4	&utility.FIELDTYPE_DATE	Date field
5	&utility.FIELDTYPE_TIME	Time field
6	&utility.FIELDTYPE_DATETIME	DateTime field

This property is read/write.

ID property: DataSourceParameter class

Description

This property returns the ID for this data source parameter as a string.

This property is read-only.

Name property: DataSourceParameter class

Description

Use this property to set or return the name of this data source parameter as a string.

This property is read/write.

ObjectType property: DataSourceParameter class

Description

This property returns the object type for the data source parameter as a string. For a DataSourceParameter object, this is a constant value: DataSourceParameter.

This property is read-only.

Parent property: DataSourceParameter class

Description

Use this property to set or return a pointer to the DataSource object to which this parameter belongs.

This property is read/write.

Related Topics

- [DataSource Class](#)
This section provides an overview of the DataSource class and discusses:

PromptTable property: DataSourceParameter class

Description

Use this property to set or return the name of the prompt table as a string. Only a SQL table or SQL view should be used as the prompt table.

This property is read/write.

Range property: DataSourceParameter class

Description

Use this property to set or return the list of valid values as an array of array of string.

This property is read/write.

Required property: DataSourceParameter class

Description

Use this property to set or return whether this data source parameter is required, as a Boolean value.

This property is read/write.

SkipValidityChecks property: DataSourceParameter class

Description

Use this property to set or return whether to skip validity checks of the values for this data source parameter, as a Boolean value.

This property is read/write.

UsageType property: DataSourceParameter class

Description

Use this property to set or return the usage type for this data source parameter as a string. The values are:

Value	Description
&utility.USAGETYPE_FIXED	This parameter takes a fixed value.
&utility.USAGETYPE_NOTUSED	This parameter is not used.
&utility.USAGETYPE_SYSVAR	This parameter gets its value from a system variable.
&utility.USAGETYPE_USERSPECIFIED	The value of this parameter can be specified by the user.
&utility.USAGETYPE_INTERNAL	This parameter is for internal use.
&utility.USAGETYPE_ADMINSPECIFIED	The value of this parameter can be changed only by users having administrator access to the data.

This property is read/write.

UserValues property: DataSourceParameter class

Description

This property returns the valid values (that is, the UserValues collection).

This property is read-only.

Utility property: DataSourceParameter class

Description

Use this property to set or return the Utility object used by the DataSourceParameter object. By default, the parent's (that is, the data source's) Utility object is used.

This property is read/write.

Example

```
import PTFP_FEED:DataSource:DataSourceParameter;  
import PTFP_FEED:UTILITY:Utility;
```

```
Local PTFP_FEED:DataSource:DataSourceParameter &thisDSP;  
Local PTFP_FEED:UTILITY:Utility &utility;  
  
&thisDSP = create PTFP_FEED:DataSource:DataSourceParameter("dsp_ID", Null);  
&utility = &thisDSP.Utility;  
&thisDSP.Name = &thisDSP.ID;  
&thisDSP.Description = MsgGetText(219, 3005, "Message Not Found - Max  
Entries");  
&thisDSP.FieldType = &utility.FIELDTYPE_NUMBER;  
&thisDSP.DefaultValue = "10";  
&thisDSP.Value = &thisDSP.DefaultValue;  
&thisDSP.Required = True;  
&thisDSP.EditType = &utility.EDITTYPE_NOTABLEEDIT;  
&thisDSP.PromptTable = ""; /* Should only use SQL Table or View */  
&thisDSP.Range = Null; /* Only set the range if the edit type is translatable  
*/  
&thisDSP.UsageType = &utility.USAGETYPE_FIXED;  
&thisDSP.UserValues = Null;  
&thisDSP.AllowChangesToRequired = False;
```

Related Topics

- [Utility Class](#)

This section provides an overview of the Utility class and discusses:

Value property: DataSourceParameter class

Description

Use this property to set or return the value of the data source parameter as a string.

This property is read/write.

ValueForDisplay property: DataSourceParameter class

Description

This property returns a string representing the value for a data source parameter for display purposes. This is the same as the Value property except that a date value is in the user-preferred format.

This property is read-only.

DataSourceParameterValue Class

This section provides an overview of the DataSourceParameterValue class and discusses:

- DataSourceParameterValue class constructor.
- DataSourceParameterValue class methods.
- DataSourceParameterValue class properties.

The DataSourceParameterValue class represents a valid value for a data source parameter.

DataSourceParameterValue Class Constructor

This section presents the constructor for the DataSourceParameterValue class.

DataSourceParameterValue method: DataSourceParameterValue class

Example

```
Local PTFP_FEED:DataSource:DataSourceParameterValue &DSP_Value = create
PTFP_FEED:⇒
DataSource:DataSourceParameterValue("ID", &Parent_DSP);
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

DataSourceParameterValue Class Methods

In this section, the DataSourceParameterValue class methods are presented in alphabetical order.

clone method: DataSourceParameterValue class

Syntax

```
clone()
```

Description

Use this method to make a copy of this DataSourceParameterValue object.

Parameters

None.

Returns

A DataSourceParameterValue object exactly matching the current object.

equals method: DataSourceParameterValue class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current data source parameter value. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current DataSourceParameterValue object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Related Topics

- [ID property: DataSourceParameterValue class](#)
- [ObjectType property: DataSourceParameterValue class](#)

DataSourceParameterValue Class Properties

In this section, the DataSourceParameterValue class properties are presented in alphabetical order.

Description property: DataSourceParameterValue class

Description

Use this property to set or return the description of this data source parameter value as a string.

This property is read/write.

ID property: DataSourceParameterValue class

Description

This property returns the ID for this data source parameter value as a string.

This property is read-only.

Name property: DataSourceParameterValue class

Description

Use this property to set or return the name of this data source parameter value as a string.

This property is read/write.

ObjectType property: DataSourceParameterValue class

Description

This property returns the object type for the data source parameter value as a string. For a DataSourceParameterValue object, this is a constant value: DataSourceParameterValue.

This property is read-only.

OrderNumber property: DataSourceParameterValue class

Description

Use this property to set or return the order number for this data source parameter value as a number.

This property is read/write.

Parent property: DataSourceParameterValue class

Description

Use this property to set or return a pointer to the DataSourceParameter object to which this value belongs.

This property is read/write.

Related Topics

- [DataSourceParameter Class](#)
This section provides an overview of the DataSourceParameter class and discusses:

Value property: DataSourceParameterValue class

Description

Use this property to set or return the value of the data source parameter value as a string.

This property is read/write.

DataSourceSetting Class

This section provides an overview of the DataSourceSetting class and discusses:

- DataSourceSetting class constructor.
- DataSourceSetting class methods.

- DataSourceSetting class properties.

The DataSourceSetting class represents a data source setting that is used to uniquely define a feed's data source of a given type.

DataSourceSetting Class Constructor

This section presents the constructor for the DataSourceSetting class.

DataSourceSetting method: DataSourceSetting class

Example

```
import PTFP_FEED:DataSource:DataSourceSetting;

Local PTFP_FEED:DataSource:DataSourceSetting &this_DSS = create PTFP_FEED:⇒
DataSource:DataSourceSetting("DSS_ID", &DS);
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

DataSourceSetting Class Methods

In this section, the DataSourceSetting class methods are presented in alphabetical order.

clone method: DataSourceSetting class

Syntax

```
clone()
```

Description

Use this method to make a copy of this DataSourceSetting object.

Parameters

None.

Returns

A DataSourceSetting object exactly matching the current object.

equals method: DataSourceSetting class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current data source setting. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current DataSourceSetting object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Related Topics

- [ID property: DataSourceSetting class](#)
- [ObjectType property: DataSourceSetting class](#)

setRangeFromFieldTranslates method: DataSourceSetting class

Syntax

```
setRangeFromFieldTranslates(FieldName)
```

Description

Use this method to auto-populate the range values based on the valid translate values for the field.

Parameters

Parameter	Description
<i>FieldName</i>	Specifies the name of the field as a string.

Returns

None.

DataSourceSetting Class Properties

In this section, the DataSourceSetting class properties are presented in alphabetical order.

DefaultValue property: DataSourceSetting class

Description

Use this property to set or return a string representing the default value for a data source setting.

This property is read/write.

DisplayOnly property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether the Value property is displayed as display only.

This property is read/write.

EditType property: DataSourceSetting class

Description

Use this property to set or return the table edit type of the data source setting, as a number. The values are:

Numeric Value	Constant Value	Description
1	&utility.EDITTYPE_NOTABLEEDIT	This is the default edit type. A valid values list can be specified using the UserValues collection.
2	&utility.EDITTYPE_PROMPTTABLE	This data source parameter takes value from a prompt table. Only a SQL table or SQL view can be used as the prompt table.
3	&utility.EDITTYPE_TRANSLATE TABLE	This data source parameter only takes values specific in the Range array of this data source parameter
4	&utility.EDITTYPE_YESNO	This data source parameter only takes a Yes or No value.

This property is read/write.

Enabled property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether the setting is enabled.

This property is read/write.

FieldType property: DataSourceSetting class

Description

Use this property to set or return the field type as a number. The values are:

Numeric Value	Constant Value	Description
0	&utility.FIELDTYPE_CHARACTER	Character field
1	&utility.FIELDTYPE_LONGCHARACTER	Long character field
2	&utility.FIELDTYPE_NUMBER	Number field
3	&utility.FIELDTYPE_SIGNEDNUMBER	Signed number field
4	&utility.FIELDTYPE_DATE	Date field
5	&utility.FIELDTYPE_TIME	Time field
6	&utility.FIELDTYPE_DATETIME	DateTime field

This property is read/write.

ID property: DataSourceSetting class

Description

This property returns the ID for the data source setting as a string.

This property is read-only.

LongName property: DataSourceSetting class

Description

Use this property to set or return the label of the name as a string.

This property is read/write.

Name property: DataSourceSetting class

Description

Use this property to set or return the name of the data source setting as a string.

This property is read/write.

ObjectType property: DataSourceSetting class

Description

This property returns the object type for the data source setting as a string. For a DataSourceSetting object, this is a constant value: DataSourceSetting.

This property is read-only.

Parent property: DataSourceSetting class

Description

Use this property to set or return a pointer to the DataSource object to which this setting belongs.

This property is read/write.

Related Topics

- [DataSource Class](#)
This section provides an overview of the DataSource class and discusses:

PromptTable property: DataSourceSetting class

Description

Use this property to set or return the name of the prompt table as a string. Only a SQL table or SQL view should be used.

This property is read/write.

Range property: DataSourceSetting class

Description

Use this property to set or return the list of valid values as an array of array of string.

This property is read/write.

RefreshOnChange property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether to call the parent DataSource object's processSettingsChange method when the value changes.

This property is read/write.

RelatedFieldValue property: DataSourceSetting class

Description

Use this property to set or return the related display field value as a string.

This property is read/write.

Required property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether this data source setting is required.

This property is read/write.

ShowRelatedField property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether to show the related display field.

This property is read/write.

Utility property: DataSourceSetting class

Description

Use this property to set or return the Utility object used by the DataSourceSetting object. By default, the parent's (that is, the data source's) Utility object is used.

This property is read/write.

Example

```
import PTFP_FEED:DataSource:DataSourceSetting;
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:DataSource:DataSourceSetting &thisDSS;
Local PTFP_FEED:UTILITY:Utility &utility;

&thisDSS = create PTFP_FEED:DataSource:DataSourceSetting("dss_ID", Null);
&utility = &thisDSS.Utility;
&thisDSS.Name = &thisDSS.ID;
&thisDSS.LongName = "Data Type Name";
&thisDSS.FieldType = &utility.FIELDTYPE_CHARACTER;
&thisDSS.DefaultValue = "";
&thisDSS.RelatedFieldValue = "";
&thisDSS.EditType = &utility.EDITTYPE_PROMPTTABLE;
&thisDSS.PromptTable = Record.PTFP_DTYPE_PVW; /* Only use SQL Table or View */
&thisDSS.Range = Null; /* Only set the range if the edit type is translatable
*/
&thisDSS.Required = True;
&thisDSS.Enabled = True;
&thisDSS.Visible = True;
&thisDSS.DisplayOnly = False;
&thisDSS.ShowRelatedField = True;
&thisDSS.RefreshOnChange = True;
```

Related Topics

- [Utility Class](#)

This section provides an overview of the Utility class and discusses:

Value property: DataSourceSetting class

Description

Use this property to set or return the value of the data source setting as a string.

This property is read/write.

Visible property: DataSourceSetting class

Description

Use this property to set or return a Boolean value indicating whether to show the Value field when it's enabled.

This property is read/write.

Utility Class

This section provides an overview of the Utility class and discusses:

- Utility class constructor.
- Utility class methods.
- Utility class properties.

The Utility class provides methods and constants used by other classes of the Feed Publishing Framework

Utility Class Constructor

This section presents the constructor for the Utility class.

Utility method: Utility class

Example

```
import PTFP_FEED:UTILITY:Utility;  
  
Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();
```

Related Topics

- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

Utility Class Methods

In this section, the Utility class methods are presented in alphabetical order.

dateStringToUserPref method: Utility class

Syntax

```
dateStringToUserPref(DateString)
```

Description

Use this method to transform a date string from the "yyyy-MM-dd" format to the user-preferred date format.

Parameters

Parameter	Description
<i>DateString</i>	Specifies the date string to be transformed.

Returns

A string containing the date in the user-preferred date format.

datetimeToString method: Utility class

Syntax

```
datetimeToString(Datetime)
```

Description

Use this method to transform a DateTime value to a string in "yyyy-MM-dd HH:mm:ss" format.

Parameters

Parameter	Description
<i>Datetime</i>	Specifies the DateTime value to be transformed.

Returns

A string in "yyyy-MM-dd HH:mm:ss" format or an empty string if the DateTime value is empty.

dateToString method: Utility class

Syntax

```
dateToString(Date)
```


Description

Use this method to transform a date value to a string in “yyyy-MM-dd” format.

Parameters

Parameter	Description
<i>Date</i>	Specifies the date value to be transformed.

Returns

A string in “yyyy-MM-dd” format or an empty string if the date value is empty.

decodeXML method: Utility class

Syntax

decodeXML(*String*)

Description

Use this method to decode the following encoded XML characters in the source string:

Encoded Character	Decoded Character
<	< (less than)
>	> (greater than)
&	& (ampersand)
'	' (apostrophe)
"	" (quotation mark)

Parameters

Parameter	Description
<i>String</i>	Specifies the source XML string with encoded characters to be decoded.

Returns

A string containing the source XML string with encoded characters decoded.

Example

```
For &i = 1 To &elementList.Len
    &valueList = CreateArrayRept("", &pChildTags.Len);
    For &j = 1 To &pChildTags.Len
        &thisValue = %This.getNodeValue(&elementList [&i], &pChildTags [&j]);
        &valueList [&j] = %This.decodeXML(&thisValue);
    End-For;
    &return_value.Push(&valueList);
End-For;
```

Related Topics

- [encodeXML method: Utility class](#)
- [split2D method: Utility class](#)

encodeXML method: Utility class

Syntax

```
encodeXML(String)
```

Description

Use this method to encode the following special characters in the source string as encoded XML characters:

Character	Encoded Character
< (less than)	<
> (greater than)	>
& (ampersand)	&
' (apostrophe)	'
" (quotation mark)	"

Parameters

Parameter	Description
<i>String</i>	Specifies the source string with special characters to be encoded.

Returns

A string containing the source string with the special characters encoded.

Example

```
If (&pValues [&i] <> Null) And
    (&pChildTags <> Null) Then
    /* get the children */
    For &j = 1 To &pValues [&i].Len
        If &j > &pChildTags.Len Then
            Break;
        End-If;
        &thisElement = &thisElement | %This.setNodeValue(%This.encodeXML⇒
(&pValues [&i][&j]), &pChildTags [&j]);
    End-For;
End-If;
```

Related Topics

- [decodeXML method: Utility class](#)
- [join2D method: Utility class](#)

evaluateSysVar method: Utility class

Syntax

```
evaluateSysVar(SysVar)
```

Description

Use this method to evaluate and return the value of a system variable.

Parameters

Parameter	Description
<i>SysVar</i>	Specifies the system variable to be evaluated as a string.

Returns

A string representation of the evaluated system variable, or the system variable name if it cannot be evaluated.

genNameSpaceID method: Utility class

Syntax

```
genNameSpaceID(NameSpace_ID)
```

Description

Use this method to replace special characters in the original ID string with “_”, so that it only contains “A–Z”, “0–9” and “_”.

Parameters

Parameter	Description
<i>NameSpace_ID</i>	Specifies the name space ID to be converted as a string.

Returns

A string containing the generated name space ID using only “A–Z”, “0–9” and “_”.

getExceptionText method: Utility class

Syntax

```
getExceptionText(&Exception)
```

Description

Use this method to return the exception error message.

Parameters

Parameter	Description
<i>&Exception</i>	Specifies the exception as an Exception object.

Returns

The exception error message as a string.

getFeedDoc method: Utility class

Syntax

```
getFeedDoc(feed_ID, Format, &Attributes)
```

Description

Use this method to create a FeedDoc object of the given feed format.

Parameters

Parameter	Description
<i>feed_ID</i>	Specifies the ID of the feed definition as a string.
<i>Format</i>	Specifies the feed format as a string. The values are:

Value	Description
&utility.FEEDFORMAT_ATOM10	An Atom 1.0 format feed.

Parameter	Description
<i>&Attributes</i>	Specifies the feed-level properties as an Attribute collection.

Returns

A FeedDoc object of the given feed format with properties filled in from the Attribute collection.

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:XML_FEED:FeedDoc;  
import PTFP_FEED:XML_FEED:FeedEntry;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:XML_FEED:FeedDoc &this_FeedDoc = &thisFeedFactory.Utility.⇒
```

```
getFeedDoc("feed_ID", &thisFeedFactory.Utility.FEEDFORMAT_ATOM10, Null);  
Local PTFP_FEED:XML_FEED:FeedEntry &this_Entry = &this_FeedDoc.⇒  
addEntry("entry_ID");
```

Related Topics

- [FeedDoc Class](#)

This section provides an overview of the FeedDoc class and discusses:

getFeedMimeType method: Utility class

Syntax

```
getFeedMimeType(Format)
```

Description

Use this method to return the MIME type of the given feed format.

Parameters

Parameter	Description
<i>Format</i>	Specifies the feed format as a string. The values are:
Value	Description
&utility.FEEDFORMAT_ATOM10	An Atom 1.0 format feed.

Returns

A string containing the MIME type as follows:

Feed Format Constant	MIME Type Constant	MIME Type
&utility.FEEDFORMAT_ATOM10	MIMETYPE_ATOM	application/atom+xml
<i>undefined</i>	MIMETYPE_XML	application/xml

getFieldTranslates method: Utility class

Syntax

```
getFieldTranslates(FieldName)
```

Description

Use this method to return the valid translate values of a field.

Parameters

Parameter	Description
<i>FieldName</i>	Specifies the field name for which to retrieve translate values, as a string.

Returns

An array of array of string.

getNodeValue method: Utility class

Syntax

```
getNodeValue(String, Tag)
```

Description

Use this method to extract the value from the first element enclosed by the given tag in the source string.

Parameters

Parameter	Description
<i>String</i>	Specifies the string to check.
<i>Tag</i>	Specifies the tag to search for as a string.

Returns

A string containing the value from the first element enclosed by the specified tag.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str = "<div><p>value1</p><p>value2</p></div>";

&str1 = &utility.getNodeValue(&str, "p");

/* &str1="value1" */
```

Related Topics

- [setNodeValue method: Utility class](#)
- [split method: Utility class](#)
- [split2D method: Utility class](#)

getUserDateFormat method: Utility class

Syntax

```
getUserDateFormat()
```

Description

Use this method to construct and return the date format string based on the user's personalization settings.

Parameters

None.

Returns

A string containing the format mask representing the user's preferred date format—for example: MM-dd-yyyy.

getUserDatetimeFormat method: Utility class

Syntax

```
getUserDatetimeFormat()
```

Description

Use this method to construct and return the date/time format string based on the user's personalization settings.

Parameters

None.

Returns

A string containing the format mask representing the user's preferred date/time format—for example: MM-dd-yyyy hh:mm a.

getUserInfo method: Utility class

Syntax

```
getUserInfo(user_ID)
```

Description

Use this method to return the user name and email address of the given user ID.

Parameters

Parameter	Description
<i>user_ID</i>	Specifies the user ID for which to retrieve the user information, as a string.

Returns

An array of string containing two elements:

- User name (or the user ID if this is empty).
- Email address (or an empty string if this is empty).

httpStringToDatetime method: Utility class

Syntax

```
httpStringToDatetime(string)
```

Description

Use this method to convert an HTTP date/time string in the "dow, dd mmm yyyy hh:mm:ss GMT" format to a DateTime value.

Parameters

Parameter	Description
<i>string</i>	Specifies the HTTP date/time string in the "dow, dd mmm yyyy hh:mm:ss GMT" format.

Returns

A DateTime value.

join method: Utility class

Syntax

```
join(&Array, Tag)
```

Description

Use this method to concatenate the string array together enclosing each string element in the specified tag.

Parameters

Parameter	Description
<i>&Array</i>	Specifies the array of string to be concatenated together.

Parameter	Description
<i>Tag</i>	Specifies the tag to enclose each string element.

Returns

A string containing the concatenation of each of the string elements enclosed by the specified tag.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str = &utility.join(CreateArray("value1", "value2"), "p");

/* &str="<p>value1</p><p>value2</p>" */
```

Related Topics

- [setNodeValue method: Utility class](#)
- [split method: Utility class](#)

join2D method: Utility class

Syntax

```
join2D(&Array, Tag, ChildTags)
```

Description

Use this method to concatenate the array of array of string together enclosing each element in the specified tag. Each child element is XML encoded and enclosed in the child tag.

Parameters

Parameter	Description
<i>&Array</i>	Specifies the array of array of string to be concatenated together.
<i>Tag</i>	Specifies the tag to enclose each string element, as a string.
<i>ChildTags</i>	Specifies the tags to enclose each child element, as an array of string.

Returns

A string containing the concatenation of each of the string elements enclosed by the specified tag. Each child element is XML encoded and enclosed in the child tag.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str = &utility.join2D(CreateArray(CreateArray("value1", "value2")), "div", ⇒
CreateArray("b", "i"));

/* &str="<div><b>value1</b><i>value2</i></div>" */
```

Related Topics

- [encodeXML method: Utility class](#)
- [setNodeValue method: Utility class](#)
- [split method: Utility class](#)

setMessageHeadersAndMimeType method: Utility class

Syntax

```
setMessageHeadersAndMimeType(&Message, &FeedException, &FeedRequest)
```

Description

Use this method to return the specified Message object with the MIME type set, and populated with the specified FeedDoc. If the feed is an incremental feed, then incremental feed information is set as connector properties for the message.

Parameters

Parameter	Description
<i>&Message</i>	Specifies the Message object to be returned.
<i>&feeddoc</i>	Specifies the feed document to be returned specified as an XmlDocument object.
<i>&FeedRequest</i>	Specifies the feed as a FeedRequest object.

Returns

A Message object.

Related Topics

- [httpStringToDatetime method: Utility class](#)
- [Implementing a Real-Time Feed Request Handler](#)
The following example implements a real-time feed request handler from the IRequestHandler superclass.
- [Feed Publishing Framework: Incremental Feeds](#)

setNodeValue method: Utility class

Syntax

```
setNodeValue(Value, Tag)
```

Description

Use this method to form an element using the given value and tag name.

Parameters

Parameter	Description
<i>Value</i>	Specifies the string value to enclose in the tags.
<i>Tag</i>	Specifies the tag to enclose the value within, as a string.

Returns

A string element containing the value enclosed within the given tag.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str1 = &utility.setNodeValue("value", "p");

/* &str="<p>value</p>" */
```

Related Topics

- [getNodeValue method: Utility class](#)
- [join method: Utility class](#)
- [join2D method: Utility class](#)

showException method: Utility class

Syntax

```
showException(Exception)
```

Description

Use this method to raise an error when the component variable &PTFP_THROWPAGELETExceptions is false, otherwise throw the exception.

Parameters

Parameter	Description
<i>Exception</i>	Specifies the exception as an Exception.

Returns

None.

showInvalidValueException method: Utility class

Syntax

```
showInvalidValueException(Name, Value)
```

Description

Use this method to show an invalid value exception using the showException method.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property as a string.
<i>Value</i>	Specifies the value that is invalid as a string.

Returns

None

Related Topics

- [showException method: Utility class](#)

split method: Utility class

Syntax

```
split()
```

Description

Use this method to extract the elements from the string that are enclosed in the specified tag.

Parameters

Parameter	Description
<i>String</i>	Specifies the string to check.
<i>Tag</i>	Specifies the tag to search for as a string.

Returns

An array of string containing the string elements enclosed by the specified tag.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str = "<p>value1</p><p>value2</p>";

&arr = &utility.split(&str, "p");

/* &arr[1]="value1", &arr[2]="value2" */
```

Related Topics

- [getNodeValue method: Utility class](#)
- [join method: Utility class](#)

split2D method: Utility class

Syntax

```
split2D()
```

Description

Use this method to extract the elements from the string that are enclosed in the specified tag. Child elements enclosed by the child tags are also extracted. All elements are XML decoded.

Parameters

Parameter	Description
<i>String</i>	Specifies the string to check.
<i>Tag</i>	Specifies the tag that encloses each string element, as a string. This tag can be an empty string.
<i>ChildTags</i>	Specifies the tags that enclose each child element, as an array of string.

Returns

An array of array of string containing the extracted string elements enclosed by the specified tags. Child elements are enclosed by the child tags. All elements are XML decoded.

Example

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();
```

```
&str = "<div><b>value1</b><i>value2</i></div>";  
  
&arr = &utility.split2D(&str, "div", CreateArray("b", "i"));  
  
/* &arr[1][1]="value1", &arr[1][2]="value2" */
```

Related Topics

- [decodeXML method: Utility class](#)
- [getNodeValue method: Utility class](#)
- [join2D method: Utility class](#)
- [split method: Utility class](#)

stringToDate method: Utility class

Syntax

```
stringToDate(DateString)
```

Description

Use this method to convert a date string in the "yyyy-MM-dd" format to a date.

Parameters

Parameter	Description
<i>DateString</i>	Specifies the string to be converted to a date.

Returns

A date.

stringToDatetime method: Utility class

Syntax

```
stringToDatetime(DatetimeString)
```

Description

Use this method to convert a date string in the "yyyy-MM-dd HH:mm:ss" format to a `DateTime` value.

Parameters

Parameter	Description
<i>DatetimeString</i>	Specifies the string to be converted to a <code>DateTime</code> value.

Returns

A DateTime value.

validateSysVar method: Utility class

Syntax

```
validateSysVar(SysVar)
```

Description

Use this method to return the valid, correctly capitalized name of a system variable.

Parameters

Parameter	Description
<i>SysVar</i>	Specifies the system variable name to be validated as a string.

Returns

A string containing the validated and correctly capitalized system variable name, INVALID SYSVAR if the system variable does not exist.

Example

In the following example, %AuthenticationToken is returned as the validated system variable name.

```
import PTFP_FEED:UTILITY:Utility;

Local PTFP_FEED:UTILITY:Utility &utility = create PTFP_FEED:UTILITY:Utility();

&str = &utility.validateSysVar("%AUTHENTICATIONtoken");

/* &str="%AUTHENTICATIONTOKEN" */
```

viewStringAsAttachment method: Utility class

Syntax

```
viewStringAsAttachment(String, FileName, ViewAttachment)
```

Description

Use this method to transform the given string into an attachment file that is sent to the browser.

Parameters

Parameter	Description
<i>String</i>	Specifies the specifies the contents of the attachment file as a string.
<i>FileName</i>	Specifies the attachment file name as a string.
<i>ViewAttachment</i>	Specifies the as a Boolean value whether the attachment is to be viewed directly or detached for download.

Returns

None.

Utility Class Properties

In this section, the Utility class properties are presented in alphabetical order.

Note

Properties in this class with capitalized names—such as, ATTACHMENT_URL, AUTHTYPE_PERM, and so on—are constants.

Some properties of the Utility class—such as, QUERYPARAMETER_FEEDID , QUERYPARAMETER_FEEDFORMAT, and so on—are referred to as query parameters. Typically, these query parameters are used in the implementation of a feed request handler. An example of a feed request handler that uses query parameters is provided at the end of this chapter.

Related Topics

- [Implementing a Real-Time Feed Request Handler](#)
The following example implements a real-time feed request handler from the IRequestHandler superclass.

ATTACHMENT_URL property: Utility class

Description

Use this property to return the attachment location from the PTFP_DOCINDB URL definition, as a string.

This property is read-only.

AUTHTYPE_PERM property: Utility class

Description

Use this property to return the value that represents the permission list-based authentication type, as a string.

This property is read-only.

AUTHTYPE_ROLE property: Utility class

Description

Use this property to return the value that represents the role-based authentication type, as a string.

This property is read-only.

DSPARAMETER_INCREMENTAL property: Utility class

Description

Use this property to return a string representing the name of the incremental feed data source parameter.

This property is read-only.

Related Topics

- [INCREMENTALOPTION_NO property: Utility class](#)
- [INCREMENTALOPTION_YES property: Utility class](#)

DSPARAMETER_MAXROW property: Utility class

Description

Use this property to return a string representing the name of the maximum rows data source parameter for scheduled feeds.

Note

Use either the SF_MAXROWOPTION_ALLMSGs property or the SF_MAXROWOPTION_LATESTMSG property to return the *value* of the maximum rows data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [SF_MAXROWOPTION_ALLMSGs property: Utility class](#)
- [SF_MAXROWOPTION_LATESTMSG property: Utility class](#)

DSPARAMETER_SF_MAXMINUTES property: Utility class

Description

Use this property to return a string representing the name of the maximum minutes data source parameter for scheduled feeds.

Note

Use the SF_MAXMINUTES_ALLMSGSGS property to return the *value* of the maximum minutes data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [SF_MAXMINUTES_ALLMSGSGS property: Utility class](#)

DSPARAMETER_SF_PAGING property: Utility class

Description

Use this property to return a string representing the name of the paging data source parameter for scheduled feeds.

Note

Use either the SF_PAGINGOPTION_NOPAGING property or the SF_PAGINGOPTION_SEGMENTED property to return the *value* of the paging data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [SF_PAGINGOPTION_NOPAGING property: Utility class](#)
- [SF_PAGINGOPTION_SEGMENTED property: Utility class](#)

EDITTYPE_NOTABLEEDIT property: Utility class

Description

Use this property to return a number representing the field edit type as no prompt table edit.

This property is read-only.

EDITTYPE_PROMPTTABLE property: Utility class

Description

Use this property to return a number representing the field edit type as prompt table edit.

This property is read-only.

EDITTYPE_TRANSLATETABLE property: Utility class

Description

Use this property to return a number representing the field edit type as translate table edit.

This property is read-only.

EDITTYPE_YESNO property: Utility class

Description

Use this property to return a number representing the field edit type as a Yes/No edit.

This property is read-only.

FEEDATTRIBUTE_AUTHOR property: Utility class

Description

Use this property to return the AUTHOR feed attribute name as a string.

This property is read-only.

Related Topics

- [XMLCHILDELEMENTS_PERSON property: Utility class](#)

FEEDATTRIBUTE_CLOUD property: Utility class

Description

Use this property to return the CLOUD feed attribute name as a string.

This property is read-only.

Related Topics

- [XMLCHILDELEMENTS_CLOUD property: Utility class](#)

FEEDATTRIBUTE_COMPLETE property: Utility class

Description

Use this property to return the COMPLETE feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_CONTRIBUTOR property: Utility class

Description

Use this property to return the CONTRIBUTOR feed attribute name as a string.

This property is read-only.

Related Topics

- [XMLCHILDELEMENTS_PERSON property: Utility class](#)

FEEDATTRIBUTE_COPYRIGHT property: Utility class

Description

Use this property to return the COPYRIGHT feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_EXPIRES property: Utility class

Description

Use this property to return the EXPIRES feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_ICONURL property: Utility class

Description

Use this property to return the ICONURL feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_LOGOURL property: Utility class

Description

Use this property to return the LOGOURL feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_MANAGINGEDITOR property: Utility class

Description

Use this property to return the MANAGINGEDITOR feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_MAXAGE property: Utility class

Description

Use this property to return the MAXAGE feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_PERSINSTRUCTION property: Utility class

Description

Use this property to return the PERSINSTRUCTION feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_RATING property: Utility class

Description

Use this property to return the RATING feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_SKIPDAYS property: Utility class

Description

Use this property to return the SKIPDAYS feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_SKIPHOURS property: Utility class

Description

Use this property to return the SKIPHOURS feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_TEXTINPUT property: Utility class

Description

Use this property to return the TEXTINPUT feed attribute name as a string.

This property is read-only.

Related Topics

- [XMLCHILDELEMENTS_TEXTINPUT property: Utility class](#)

FEEDATTRIBUTE_TTL property: Utility class

Description

Use this property to return the TTL feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_WEBMASTER property: Utility class

Description

Use this property to return the WEBMASTER feed attribute name as a string.

This property is read-only.

FEEDATTRIBUTE_XSL property: Utility class

Description

Use this property to return the XSL feed attribute name as a string.

This property is read-only.

FEEDAUTHTYPE_ALL property: Utility class

Description

Use this property to return a string representing the feed authorization type as all.

This property is read-only.

FEEDAUTHTYPE_ANONYMOUS property: Utility class

Description

Use this property to return a string representing the feed authorization type as anonymous.

This property is read-only.

FEEDAUTHTYPE_DEFAULT property: Utility class

Description

Use this property to return a string representing the feed authorization type as default.

This property is read-only.

FEEDCACHETYPE_NONE property: Utility class

Description

Use this property to return a string representing the feed cache type as none.

This property is read-only.

FEEDCACHETYPE_PRIVATE property: Utility class

Description

Use this property to return a string representing the feed cache type as private.

This property is read-only.

FEEDCACHETYPE_PUBLIC property: Utility class

Description

Use this property to return a string representing the feed cache type as public.

This property is read-only.

FEEDCACHETYPE_ROLE property: Utility class

Description

Use this property to return a string representing the feed cache type as role-based.

This property is read-only.

FEEDFORMAT_ATOM10 property: Utility class

Description

Use this property to return a string representing the feed format as Atom 1.0.

This property is read-only.

FEEDSECUTYPE_PUBLIC property: Utility class

Description

Use this property to return a string representing the feed security type as public access.

This property is read-only.

FEEDSECUTYPE_REALTIME property: Utility class

Description

Use this property to return a string representing the feed security type as real-time security.

This property is read-only.

FEEDSECUTYPE_SELECTED property: Utility class

Description

Use this property to return a string representing the feed security type as select security access.

This property is read-only.

FEEDTEMPLATE_NO property: Utility class

Description

Use this property to return a string indicating that the feed definition is not a feed template definition—that is, it is the definition for a feed.

This property is read-only.

Related Topics

- [FeedTemplate property: Feed class](#)
- Feed Publishing Framework: Feed Templates

FEEDTEMPLATE_YES property: Utility class

Description

Use this property to return a string indicating that the feed definition is a feed template definition.

This property is read-only.

Related Topics

- [FeedTemplate property: Feed class](#)
- Feed Publishing Framework: Feed Templates

FEEDTYPE_DYNAMIC property: Utility class

Description

Use this property to return a string representing the feed type as real time (formerly known as dynamic).

This property is read-only.

FEEDTYPE_PREPUBLISHED property: Utility class

Description

Use this property to return a string representing the feed type as scheduled (formerly known as prepublished).

This property is read-only.

FIELDTYPE_CHARACTER property: Utility class

Description

Use this property to return a number representing the field type as character.

This property is read-only.

FIELDTYPE_DATE property: Utility class

Description

Use this property to return a number representing the field type as date.

This property is read-only.

FIELDTYPE_DATETIME property: Utility class

Description

Use this property to return a number representing the field type as DateTime.

This property is read-only.

FIELDTYPE_LONGCHARACTER property: Utility class

Description

Use this property to return a number representing the field type as long character.

This property is read-only.

FIELDTYPE_NUMBER property: Utility class

Description

Use this property to return a number representing the field type as number.

This property is read-only.

FIELDTYPE_SIGNEDNUMBER property: Utility class

Description

Use this property to return a number representing the field type as signed number.

This property is read-only.

FIELDTYPE_TIME property: Utility class

Description

Use this property to return a number representing the field type as time.

This property is read-only.

IBSOTYPE_ASYNC property: Utility class

Description

Use this property to return a string representing the Integration Broker service operation type as asynchronous.

This property is read-only.

IBSOTYPE_SYNC property: Utility class

Description

Use this property to return a string representing the Integration Broker service operation type as synchronous.

This property is read-only.

IBSOTYPE_UNKNOWN property: Utility class

Description

Use this property to return a string representing the Integration Broker service operation type as unknown.

This property is read-only.

ICONURL_FEED_A property: Utility class

Description

Use this property to return the active feed icon URL for PTFP_FEED_ACTIVE, as a string.

This property is read-only.

ICONURL_FEED_IA property: Utility class

Description

Use this property to return the inactive feed icon URL for PTFP_FEED_INACTIVE, as a string.

This property is read-only.

INCREMENTALOPTION_NO property: Utility class

Description

Use this property to return an integer indicating that the feed is not an incremental feed.

This property is read-only.

Related Topics

- [DSPARAMETER_INCREMENTAL property: Utility class](#)
- Feed Publishing Framework: Incremental Feeds

INCREMENTALOPTION_YES property: Utility class

Description

Use this property to return an integer indicating that the feed is an incremental feed.

This property is read-only.

Related Topics

- [DSPARAMETER_INCREMENTAL property: Utility class](#)
- Feed Publishing Framework: Incremental Feeds

LINKTYPE_FIRST property: Utility class

Description

Use this property for a paged feed to return a string indicating that link type is first.

This property is read-only.

Related Topics

- [getRelativePageLinkForFeed method: FeedFactory class](#)
- Feed Publishing Framework: Paged Feeds

LINKTYPE_LAST property: Utility class

Description

Use this property for a paged feed to return a string indicating that link type is last.

This property is read-only.

Related Topics

- [getRelativePageLinkForFeed method: FeedFactory class](#)
- Feed Publishing Framework: Paged Feeds

LINKTYPE_NEXT property: Utility class

Description

Use this property for a paged feed to return a string indicating that link type is next.

This property is read-only.

Related Topics

- [getRelativePageLinkForFeed method: FeedFactory class](#)
- Feed Publishing Framework: Paged Feeds

LINKTYPE_PREVIOUS property: Utility class

Description

Use this property for a paged feed to return a string indicating that link type is previous.

This property is read-only.

Related Topics

- [getRelativePageLinkForFeed method: FeedFactory class](#)
- Feed Publishing Framework: Paged Feeds

MIMETYPE_ATOM property: Utility class

Description

Use this property to return a string containing the MIME type for Atom feed format data.

This property is read-only.

MIMETYPE_OPML property: Utility class

Description

Use this property to return a string containing the MIME type for OPML format data.

This property is read-only.

MIMETYPE_XML property: Utility class

Description

Use this property to return a string containing the MIME type as XML for unknown feed format data.

This property is read-only.

OPERATINGMODE_AUTHORIZATION property: Utility class

Description

Use this property to return a number representing the Feed object operating mode as for user authorization only.

Note

Most other operations such as execute, save, and delete are not allowed.

This property is read-only.

OPERATINGMODE_DEFAULT property: Utility class

Description

Use this property to return a number representing the Feed object operating mode as default.

Note

A Feed object in this mode allows all operations such as save, delete, and so on.

This property is read-only.

OPERATINGMODE_DELETION property: Utility class

Description

Use this property to return a number representing the Feed object operating mode as for feed deletion only.

Note

Most other operations such as execute and save are not allowed.

This property is read-only.

OPERATINGMODE_EXECUTION property: Utility class

Description

Use this property to return a number representing the Feed object operating mode as for feed execution only.

Note

Other operations such as save and delete are not allowed.

This property is read-only.

OPERATINGMODE_EXECUTION_NOENTRY property: Utility class

Description

Use this property to return a number representing the Feed object operating mode as for feed execution only to return just an empty feed header (that is, without feed entries).

Note

Otherwise, this mode is the same as the OPERATINGMODE_EXECUTION mode.

This property is read-only.

QUERYPARAMETER_CHILDFEEDID property: Utility class

Description

Use this property to return the ChildFeedID query parameter name as a string.

This property is read-only.

QUERYPARAMETER_DATATYPEID property: Utility class

Description

Use this property to return the PTFP_DATA_TYPE query parameter as a string.

This property is read-only.

QUERYPARAMETER_DEFLOCALNODE property: Utility class

Description

Use this property to return the To query parameter as a string.

This property is read-only.

QUERYPARAMETER_DSSCOUNT property: Utility class

Description

Use this property to return the PTFP_DSS_COUNT query parameter as a string.

This property is read-only.

QUERYPARAMETER_DSSNAME property: Utility class

Description

Use this property to return the PTFP_DSS_NAME query parameter as a string.

This property is read-only.

QUERYPARAMETER_DSSVALUE property: Utility class

Description

Use this property to return the PTFP_DSS_VALUE query parameter as a string.

This property is read-only.

QUERYPARAMETER_FEEDFORMAT property: Utility class

Description

Use this property to return the FeedFormat query parameter as a string.

This property is read-only.

QUERYPARAMETER_FEEDID property: Utility class

Description

Use this property to return the FEED_ID query parameter as a string.

This property is read-only.

QUERYPARAMETER_FEEDLIST property: Utility class

Description

Use this property to return the FEEDLIST query parameter as a string.

This property is read-only.

QUERYPARAMETER_FEEDTYPE property: Utility class

Description

Use this property to return the PTFP_FEED_TYPE query parameter as a string.

This property is read-only.

QUERYPARAMETER_IBTRANSID property: Utility class

Description

Use this property to return the IB_TRANS_ID query parameter as a string.

This property is read-only.

QUERYPARAMETER_IFMODIFIEDSINCE property: Utility class

Description

Use this property to return the If-None-Match query parameter as a string.

This property is read-only.

QUERYPARAMETER_IFNONEMATCH property: Utility class

Description

Use this property to return the PAGE_NUM query parameter as a string.

This property is read-only.

QUERYPARAMETER_KEYWORD property: Utility class

Description

Use this property to return the PTFP_FEED_KEYWORD query parameter as a string.

This property is read-only.

QUERYPARAMETER_LANGUAGE property: Utility class

Description

Use this property to return the languageCd query parameter as a string.

This property is read-only.

QUERYPARAMETER_NODENAME property: Utility class

Description

Use this property to return the NODE_NAME query parameter as a string.

This property is read-only.

QUERYPARAMETER_PAGENUM property: Utility class

Description

Use this property to return this query parameter as a string.

This property is read-only.

QUERYPARAMETER_PORTALNAME property: Utility class

Description

Use this property to return the PORTAL_NAME query parameter as a string.

This property is read-only.

QUERYPARAMETER_PTPPB_SEARCH_MODE property: Utility class

Description

Use this property to return the PTPPB_SEARCH_MODE query parameter as a string.

This property is read-only.

QUERYPARAMETER_PTPPB_SEARCH_TEXT property: Utility class

Description

Use this property to return the SEARCH_TEXT query parameter as a string.

This property is read-only.

RequestInfo property: Utility class

Description

Use this property to set or return a FeedRequest object.

This property is read/write.

SF_MAXMINUTES_ALLMSGSGS property: Utility class

Description

Use this property to return a number representing *all messages* as the value for the maximum minutes data source parameter for scheduled feeds.

① Note

Use the DSPARAMETER_SF_MAXMINUTES property to return the *name* of the maximum minutes data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [DSPARAMETER_SF_MAXMINUTES property: Utility class](#)

SF_MAXROWOPTION_ALLMSGSGS property: Utility class

Description

Use this property to return a number representing *all messages* as the value for the maximum row data source parameter for scheduled feeds.

① Note

Use the DSPARAMETER_MAXROW property to return the *name* of the maximum row data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [DSPARAMETER_MAXROW property: Utility class](#)

SF_MAXROWOPTION_LATESTMSG property: Utility class

Description

Use this property to return a number representing *latest message* as the value for the maximum row data source parameter for scheduled feeds.

① Note

Use the DSPARAMETER_MAXROW property to return the *name* of the maximum row data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [DSPARAMETER_MAXROW property: Utility class](#)

SF_PAGINGOPTION_NOPAGING property: Utility class

Description

Use this property to return a number representing *no paging* as the value for the paging data source parameter for scheduled feeds.

Note

Use the DSPARAMETER_SF_PAGING property to return the *name* of the paging data source parameter for scheduled feeds.

This property is read-only.

Related Topics

- [DSPARAMETER_SF_PAGING property: Utility class](#)

SF_PAGINGOPTION_SEGMENTED property: Utility class

Description

Use this property to return a number representing *segmented message* as the value for the paging data source parameter for scheduled feeds.

Note

Use the DSPARAMETER_SF_PAGING property to return the *name* of the paging data source parameter for scheduled feeds.

Important

Using SF_PAGINGOPTION_SEGMENTED returns the oldest page (message segment) as the initial page of the feed. The links to the other pages (next, previous, first, and last) are available in the FeedDoc wherever applicable.

This option is best suited for when the feed output is large and the feed itself is to be consumed by a crawler or a feed reader application that understand these links.

This property is read-only.

Related Topics

- [DSPARAMETER_SF_PAGING property: Utility class](#)

SYSVAR_INVALID property: Utility class

Description

Use this property to return the string that indicates that a system variable is invalid.

This property is read-only.

USAGETYPE_ADMINSPECIFIED property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is administrator specified.

This property is read-only.

USAGETYPE_FIXED property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is fixed.

This property is read-only.

USAGETYPE_INTERNAL property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is internal.

This property is read-only.

USAGETYPE_NOTUSED property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is not used.

This property is read-only.

USAGETYPE_SYSVAR property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is system variable.

This property is read-only.

USAGETYPE_USERSPECIFIED property: Utility class

Description

Use this property to return a string indicating that the data source parameter usage type is user specified.

This property is read-only.

XMLCHILDELEMENTS_CLOUD property: Utility class

Description

Use this property to return an array of string containing the list of children XML tags used by the FEEDATTRIBUTE_CLOUD feed attribute.

This property is read-only.

Related Topics

- [FEEDATTRIBUTE_CLOUD property: Utility class](#)

XMLCHILDELEMENTS_PERSON property: Utility class

Description

Use this property to return an array of string containing the list of children XML tags used by the FEEDATTRIBUTE_AUTHOR and FEEDATTRIBUTE_CONTRIBUTOR feed attributes.

This property is read-only.

Related Topics

- [FEEDATTRIBUTE_AUTHOR property: Utility class](#)
- [FEEDATTRIBUTE_CONTRIBUTOR property: Utility class](#)

XMLCHILDELEMENTS_TEXTINPUT property: Utility class

Description

Use this property to return an array of string containing the list of children XML tags used by the FEEDATTRIBUTE_TEXTINPUT feed attribute.

This property is read-only.

Related Topics

- [FEEDATTRIBUTE_TEXTINPUT property: Utility class](#)

XMLELEMENT_DAY property: Utility class

Description

Use this property to return as a string the representing the day XML element.

This property is read-only.

XMLELEMENT_DESCRIPTION property: Utility class

Description

Use this property to return as a string the representing the description XML element.

This property is read-only.

XMLELEMENT_DOMAIN property: Utility class

Description

Use this property to return as a string the representing the domain XML element.

This property is read-only.

XMLELEMENT_EMAIL property: Utility class

Description

Use this property to return as a string the representing the email XML element.

This property is read-only.

XMLELEMENT_HOUR property: Utility class

Description

Use this property to return as a string the representing the hour XML element.

This property is read-only.

XMLELEMENT_LINK property: Utility class

Description

Use this property to return as a string the representing the link XML element.

This property is read-only.

XMLELEMENT_NAME property: Utility class

Description

Use this property to return as a string the representing the name XML element.

This property is read-only.

XMLELEMENT_PATH property: Utility class

Description

Use this property to return as a string the representing the path XML element.

This property is read-only.

XMLELEMENT_PORT property: Utility class

Description

Use this property to return as a string the representing the port XML element.

This property is read-only.

XMLELEMENT_PROTOCOL property: Utility class

Description

Use this property to return as a string the representing the protocol XML element.

This property is read-only.

XMLELEMENT_REGISTERPROCEDURE property: Utility class

Description

Use this property to return as a string the representing the register protocol XML element.

This property is read-only.

XMLELEMENT_TITLE property: Utility class

Description

Use this property to return as a string the representing the title XML element.

This property is read-only.

FeedDoc Class

This section provides an overview of the FeedDoc class and discusses:

- FeedDoc class constructor.
- FeedDoc class methods.
- FeedDoc class properties.

The FeedDoc class extends the XmlDoc base class to provide a generic interface class for feed documents. Therefore, for each feed format type, a format-specific feed document class is required to extend the base FeedDoc class. As a base class, the FeedDoc class has abstract methods and properties, which are identified as such in the following sections.

FeedDoc Class Constructor

This section presents the constructor for the FeedDoc class.

FeedDoc method: Feed class

Example

```
import PTFP_FEED:FeedFactory;  
import PTFP_FEED:XML_FEED:FeedDoc;  
  
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();  
Local PTFP_FEED:XML_FEED:FeedDoc &this_FeedDoc = &thisFeedFactory.⇒  
getFeedDoc("feed_ID", &thisFeedFactory.Utility.FEEDFORMAT_ATOM10, Null);
```

Related Topics

- [getFeedDoc method: Utility class](#)
- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

FeedDoc Class Methods

In this section, the FeedDoc class methods are presented in alphabetical order.

addCategory method: FeedDoc class

Syntax

```
addCategory(category)
```

Description

Use this method to add a category attribute to the feed document as a string.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>category</i>	Specifies the category as a string.

Returns

A Boolean value: True if the add was successful, False otherwise.

Related Topics

- [deleteCategory method: FeedDoc class](#)
- [Categories property: FeedDoc class](#)

addEntry method: FeedDoc class

Syntax

```
addEntry(entry_ID)
```

Description

Use this method to create a FeedEntry object with the given ID.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>entry_ID</i>	Specifies the ID of the feed entry as a string.

Returns

A FeedEntry object if successful, False otherwise.

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:XML_FEED:FeedDoc;
import PTFP_FEED:XML_FEED:FeedEntry;

Local boolean &succeeded;
Local array of string &tempArray;

Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:XML_FEED:FeedDoc &thisFeedDoc = &thisFeedFactory.Utility.⇒
getFeedDoc("feed_ID", &thisFeedFactory.Utility.FEEDFORMAT_ATOM10, Null);
Local PTFP_FEED:XML_FEED:FeedEntry &thisEntry =
&thisFeedDoc.addEntry("entry_ID");

&thisEntry.Title = &contentTitle;
&thisEntry.Description = &contentEntryDesc;
&succeeded = &thisEntry.addCategory(&contentFolderTitle);
&thisEntry.ContentUrl = &contentUrl;
```



```
&thisEntry.GUID = &contentUrl;  
&thisEntry.Published = &contentCreatedDateTime;  
&thisEntry.Updated = &contentLastUpdatedDateTime;  
&thisEntry.Author =  
&thisFeedFactory.Utility.getUserInfo(&contentCreatedByOprid);  
&tempArray = &thisFeedFactory.Utility.getUserInfo(&contentLastUpdatedByOprid);  
&succeeded = &thisEntry.addContributor(&tempArray [1], &tempArray [2]);  
&succeeded = &thisEntry.addEnclosure(&contentAttachmentUrl, =>  
"application/octet-stream", 123456);
```

Related Topics

- [deleteEntry method: FeedDoc class](#)
- [getEntry method: FeedDoc class](#)
- [resetEntries method: FeedDoc class](#)
- [Entries property: FeedDoc class](#)
- [FeedEntry Class](#)

This section provides an overview of the FeedEntry class and discusses:

datetimeToString method: FeedDoc class

Syntax

```
datetimeToString(Datetime)
```

Description

Use this method to transform a DateTime value to a string in a feed-specific format—for example, in the “yyyy-MM-dd HH:mm:ss.SSS” format.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>Datetime</i>	Specifies the DateTime value to be transformed.

Returns

A string in a feed-specific format or an empty string if the DateTime value is empty.

deleteCategory method: FeedDoc class

Syntax

```
deleteCategory(category)
```

Description

Use this method to delete a category attribute from a FeedDoc object.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>category</i>	Specifies the category as a string.

Returns

A Boolean value: True if the delete was successful, False otherwise.

Related Topics

- [addCategory method: FeedDoc class](#)

deleteEntry method: FeedDoc class

Syntax

```
deleteEntry(entry_ID)
```

Description

Use this method to delete the feed entry and the FeedEntry object with the given ID.

Parameters

Parameter	Description
<i>entry_ID</i>	Specifies the ID of the feed entry as a string.

Returns

A Boolean value: True if the delete was successful, False otherwise.

Related Topics

- [addEntry method: FeedDoc class](#)
- [FeedEntry Class](#)
This section provides an overview of the FeedEntry class and discusses:
- [delete method: FeedEntry class](#)

equals method: FeedDoc class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current feed document. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current FeedDoc object.

Returns

A Boolean value: True if the items are equivalent, False otherwise.

Related Topics

- [ID property: FeedDoc class](#)
- [ObjectType property: FeedDoc class](#)

getEntry method: FeedDoc class

Syntax

```
getEntry(entry_ID)
```

Description

Use this method to return a FeedEntry object with the given ID.

Parameters

Parameter	Description
<i>entry_ID</i>	Specifies the ID of the feed entry as a string.

Returns

A FeedEntry object if successful, Null otherwise.

Related Topics

- [addEntry method: FeedDoc class](#)
- [FeedEntry Class](#)
This section provides an overview of the FeedEntry class and discusses:

resetEntries method: FeedDoc class

Syntax

```
resetEntries()
```

Description

Use this method to reset the FeedEntry collection.

Parameters

None.

Returns

An empty FeedEntry collection.

Related Topics

- [addEntry method: FeedDoc class](#)
- [Entries property: FeedDoc class](#)
- [FeedEntry Class](#)

This section provides an overview of the FeedEntry class and discusses:

stringToDatetime method: FeedDoc class

Syntax

```
stringToDatetime(DatetimeString)
```

Description

Use this method to covert a date/time string of a feed-specific format to a DateTime value.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>DatetimeString</i>	Specifies the string to be converted to a DateTime value.

Returns

A DateTime value.

FeedDoc Class Properties

In this section, the FeedDoc class properties are presented in alphabetical order.

AllowMoreEntries property: FeedDoc class

Description

Use this property to return a Boolean value indicating whether more feed entries are allowed for this FeedDoc object.

This property is read-only.

Related Topics

- [addEntry method: FeedDoc class](#)
- [MaxEntries property: FeedDoc class](#)
- [FeedEntry Class](#)

This section provides an overview of the FeedEntry class and discusses:

ApplicationRelease property: FeedDoc class

Description

Use this property to return the release label from the PSRELEASE table as a string.

This property is read-only.

Categories property: FeedDoc class

Description

Use this property to return the categories for the FeedDoc object as an array of string.

This property is read-only.

Note

This is an abstract property.

Related Topics

- [addCategory method: FeedDoc class](#)

ContentUrl property: FeedDoc class

Description

Use this property to set or return the content URL for the feed document as a string.

This property is read/write.

Note

This is an abstract property.

Example

```
&newDoc.ContentUrl = %This.FeedContentUrl;
```

Related Topics

- [FeedContentUrl property: Feed class](#)

Copyright property: FeedDoc class

Description

Use this property to set or return the copyright for the feed document as a string.

This property is read/write.

Note

This is an abstract property.

Description property: FeedDoc class

Description

Use this property to set or return the description for the feed document as a string.

This property is read/write.

Note

This is an abstract property.

Example

```
&newDoc.Description = %This.Description;
```

Related Topics

- [Description property: Feed class](#)

Entries property: FeedDoc class

Description

Use this property to return a collection of FeedEntry objects.

This property is read-only.

Related Topics

- [addEntry method: FeedDoc class](#)
- [deleteEntry method: FeedDoc class](#)
- [resetEntries method: FeedDoc class](#)

Expires property: FeedDoc class

Description

Use this property to set or return the expiration date and time for the feed document as a DateTime value.

This property is read/write.

Related Topics

- [datetimeToString method: FeedDoc class](#)
- [stringToDatetime method: FeedDoc class](#)

FeedFormat property: FeedDoc class

Description

Use this property to return the feed format for the feed document as a string.

This property is read-only.

Related Topics

- [FeedFormat property: Feed class](#)

FeedUrl property: FeedDoc class

Description

Use this property to set or return feed URL as a string.

This property is read/write.

Note

This is an abstract property.

Example

```
&newDoc.FeedUrl = &feedUrl;
```

Related Topics

- [FeedUrl property: Feed class](#)

FirstUrl property: FeedDoc class

Description

Use this property to set or return the URL for the first page of a paged feed as a string.

This property is read/write.

Related Topics

- [LastUrl property: FeedDoc class](#)
- [NextUrl property: FeedDoc class](#)
- [PreviousUrl property: FeedDoc class](#)
- Feed Publishing Framework: Paged Feeds

Generator property: FeedDoc class

Description

Use this property to set or return the generator of this feed document as a string.

This property is read/write.

Note

This is an abstract property.

Related Topics

- [ApplicationRelease property: FeedDoc class](#)

ID property: FeedDoc class

Description

Use this property to return the ID for this feed document as a string.

This property is read-only.

Related Topics

- [FeedDoc method: Feed class](#)

LastUrl property: FeedDoc class

Description

Use this property to set or return the URL for the last page of a paged feed as a string.

This property is read/write.

Related Topics

- [FirstUrl property: FeedDoc class](#)
- [NextUrl property: FeedDoc class](#)
- [PreviousUrl property: FeedDoc class](#)
- Feed Publishing Framework: Paged Feeds

Logo property: FeedDoc class

Description

Use this property to set or return the logo for this feed document as a string.

This property is read/write.

Note

This is an abstract property.

MaxAge property: FeedDoc class

Description

Use this property to set or return the maximum age (in milliseconds) of the feed document as a number.

Note

This property can be defined for scheduled feeds only if the DSPARAMETER_SF_MAXMINUTES data source parameter is set. This property is not enforced by all feed readers.

This property is read/write.

Related Topics

- [DSPARAMETER_SF_MAXMINUTES property: Utility class](#)

MaxEntries property: FeedDoc class

Description

Use this property to set or return the maximum number of feed entries for the feed document as a number.

This property is read/write.

The default value is 0, which is an unlimited number of entries.

Related Topics

- [AllowMoreEntries property: FeedDoc class](#)
- [FeedEntry Class](#)

This section provides an overview of the FeedEntry class and discusses:

NextUrl property: FeedDoc class

Description

Use this property to set or return the URL for the next page of a paged feed as a string.

This property is read/write.

Related Topics

- [FirstUrl property: FeedDoc class](#)
- [LastUrl property: FeedDoc class](#)
- [PreviousUrl property: FeedDoc class](#)
- Feed Publishing Framework: Paged Feeds

ObjectType property: FeedDoc class

Description

Use this property to return the object type for the feed document as a string. For a feed document, this is a constant value: FeedDoc.

This property is read-only.

PreviousUrl property: FeedDoc class

Description

Use this property to set or return the URL for the previous page of a paged feed as a string.

This property is read/write.

Related Topics

- [FirstUrl property: FeedDoc class](#)
- [LastUrl property: FeedDoc class](#)
- [NextUrl property: FeedDoc class](#)

- [Feed Publishing Framework: Paged Feeds](#)

RootElement property: FeedDoc class

Description

Use this property to return the root element for this feed document as an XmlNode object.

This property is read-only.

Title property: FeedDoc class

Description

Use this property to set or return the title for the feed document as a string.

This property is read/write.

Note

This is an abstract property.

Example

```
&newDoc.Title = %This.Title;
```

Related Topics

- [Title property: Feed class](#)

Updated property: FeedDoc class

Description

Use this property to set or return the date and time the feed document was last updated as a DateTime value.

This property is read/write.

Note

This is an abstract property.

FeedEntry Class

This section provides an overview of the FeedEntry class and discusses:

- FeedEntry class constructor.
- FeedEntry class methods.
- FeedEntry class properties.

The FeedEntry class provides a generic interface class for feed entries. Therefore, for each feed format type, a format-specific feed entry class is required to extend the base FeedEntry class. As a base class, the FeedEntry class has abstract methods and properties, which are identified as such in the following sections.

FeedEntry Class Constructor

This section presents the constructor for the FeedEntry class.

FeedEntry method: Feed class

Example

```
import PTFP_FEED:FeedFactory;
import PTFP_FEED:XML_FEED:FeedDoc;
import PTFP_FEED:XML_FEED:FeedEntry;
```

```
Local PTFP_FEED:FeedFactory &thisFeedFactory = create PTFP_FEED:FeedFactory();
Local PTFP_FEED:XML_FEED:FeedDoc &this_FeedDoc = &thisFeedFactory.Utility.⇒
getFeedDoc("feed_ID", &thisFeedFactory.Utility.FEEDFORMAT_ATOM10, Null);
Local PTFP_FEED:XML_FEED:FeedEntry &this_Entry = &this_FeedDoc.⇒
addEntry("entry_ID");
```

Related Topics

- [getFeedDoc method: Utility class](#)
- [addEntry method: FeedDoc class](#)
- [Constructors](#)

The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.

- [Import Declarations](#)

Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

FeedEntry Class Methods

In this section, the FeedEntry class methods are presented in alphabetical order.

addCategory method: FeedEntry class

Syntax

```
addCategory(category)
```

Description

Use this method to add a category attribute to the feed entry as a string.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>category</i>	Specifies the category as a string.

Returns

A Boolean value: True if the add was successful, False otherwise.

Related Topics

- [deleteCategory method: FeedEntry class](#)
- [Categories property: FeedEntry class](#)

addContributor method: FeedEntry class

Syntax

```
addContributor(name, email)
```

Description

Use this method to add a contributor attribute to the feed entry.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the contributor as a string.
<i>email</i>	Specifies the email address for the contributor as a string.

Returns

A Boolean value: True if the add was successful, False otherwise.

Related Topics

- [deleteContributor method: FeedEntry class](#)
- [Contributors property: FeedEntry class](#)

addEnclosure method: FeedEntry class

Syntax

```
addEnclosure(URL, type, length)
```

Description

Use this method to add an enclosure attribute to the feed entry.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL for the enclosure as a string.
<i>type</i>	Specifies the type of the enclosure as a string.
<i>length</i>	Specifies the length for the enclosure in bytes as a number.

Returns

A Boolean value: True if the add was successful, False otherwise.

Related Topics

- [deleteEnclosure method: FeedEntry class](#)
- [Enclosures property: FeedEntry class](#)

delete method: FeedEntry class

Syntax

```
delete()
```

Description

Use this method to delete the feed entry from a feed document.

Parameters

None.

Returns

None.

Example

```
Local boolean &deleted = False;
Local PTFP_FEED:UTILITY:Collection &Entries = %This.Entries;
Local PTFP_FEED:XML_FEED:FeedEntry &thisEntry = %This.getEntry(&pId);

If (&thisEntry <> Null) And
    ( Not &Entries.Immutable) Then
    &deleted = &Entries.deleteById(&pId);
    If &deleted Then
        &thisEntry.delete();
    End-If;
End-If;
```

Related Topics

- [deleteEntry method: FeedDoc class](#)

deleteCategory method: FeedEntry class

Syntax

```
deleteCategory(category)
```

Description

Use this method to delete a category attribute from a FeedEntry object.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>category</i>	Specifies the category as a string.

Returns

A Boolean value: True if the delete was successful, False otherwise.

Related Topics

- [addCategory method: FeedEntry class](#)

deleteContributor method: FeedEntry class

Syntax

```
deleteContributor(name)
```

Description

Use this method to delete a contributor attribute from a feed entry.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the contributor as a string.

Returns

A Boolean value: True if the delete was successful, False otherwise.

Related Topics

- [addContributor method: FeedEntry class](#)

deleteEnclosure method: FeedEntry class

Syntax

```
deleteEnclosure(URL)
```

Description

Use this method to delete an enclosure attribute from a feed entry.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL for the enclosure as a string.

Returns

A Boolean value: True if the delete was successful, False otherwise.

Related Topics

- [addEnclosure method: FeedEntry class](#)

equals method: FeedEntry class

Syntax

```
equals(&Object)
```

Description

Use this method to evaluate the equivalency of an object with the current feed entry. Equivalency is established based on the value of two properties: the object's ID and the ObjectType.

Parameters

Parameter	Description
<i>&Object</i>	Specifies the object to be compared to the current FeedEntry object.

Returns

A Boolean value: True if the objects are equivalent, False otherwise.

Related Topics

- [ID property: FeedEntry class](#)
- [ObjectType property: FeedEntry class](#)

FeedEntry Class Properties

In this section, the FeedEntry class properties are presented in alphabetical order.

Author property: FeedEntry class

Description

Use this property to set or return the author attribute for the feed entry as an array of string. The first element of the array is the author's name; the second element is the author's email address.

This property is read/write.

Note

This is an abstract property.

Categories property: FeedEntry class

Description

Use this property to return the categories for the feed entry as an array of string.

This property is read-only.

Note

This is an abstract property.

Related Topics

- [addCategory method: FeedEntry class](#)

Comments property: FeedEntry class

Description

Use this property to set or return a comments attribute for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

ContentUrl property: FeedEntry class

Description

Use this property to set or return the content URL for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

Contributors property: FeedEntry class

Description

Use this property to return the contributors for the feed entry as an array of array of string. The first element of the subarray is the contributor's name; the second element is the contributor's email address.

This property is read-only.

Note

This is an abstract property.

Related Topics

- [addContributor method: FeedEntry class](#)

Copyright property: FeedEntry class

Description

Use this property to set or return the copyright for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

Description property: FeedEntry class

Description

Use this property to set or return the description for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

Enclosures property: FeedEntry class

Description

Use this property to return the enclosures for the feed entry as an array of array of string. The first element of the subarray is the enclosure's URL; the second element is the enclosure's type; and the third element is the enclosure's length.

This property is read-only.

Note

This is an abstract property.

Related Topics

- [addEnclosure method: FeedEntry class](#)

Expires property: FeedEntry class

Description

Use this property to set or return the expiration date and time for the feed entry as a `DateTime` value.

This property is read/write.

Related Topics

- [datetimeToString method: FeedDoc class](#)
- [stringToDatetime method: FeedDoc class](#)

FeedDoc property: FeedEntry class

Description

Use this property to return the `FeedDoc` object that is the parent of this feed entry.

This property is read-only.

Example

```
&return_value = %This.FeedDoc.stringToDatetime(&expires_inst.NodeValue);
```

Related Topics

- [FeedDoc Class](#)
This section provides an overview of the `FeedDoc` class and discusses:

FullContent property: FeedEntry class

Description

Use this property to set or return the content for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

GUID property: FeedEntry class

Description

Use this property to set or return a globally unique ID (GUID) for the feed entry.

This property is read/write.

Note

This is an abstract property. For some feed formats, GUID is set to be the content URL for the feed entry.

Related Topics

- [ContentUrl property: FeedEntry class](#)

ID property: FeedEntry class

Description

Use this property to return the ID for this feed entry as a string.

This property is read-only.

Related Topics

- [FeedEntry method: Feed class](#)

MaxAge property: FeedEntry class

Description

Use this property to set or return the maximum age (in milliseconds) of the feed entry as a number.

Note

This property can be defined for scheduled feeds only if the DSPARAMETER_SF_MAXMINUTES data source parameter is set. This property is not enforced by all feed readers.

This property is read/write.

Related Topics

- [DSPARAMETER_SF_MAXMINUTES property: Utility class](#)

ObjectType property: FeedEntry class

Description

Use this property to return the object type for the feed entry as a string. For a feed entry, this is a constant value: FeedEntry .

This property is read-only.

Published property: FeedEntry class

Description

Use this property to set or return the initial publication date and time for this feed entry as a `DateTime` value.

This property is read/write.

Note

This is an abstract property.

Title property: FeedEntry class

Description

Use this property to set or return the title for the feed entry as a string.

This property is read/write.

Note

This is an abstract property.

Updated property: FeedEntry class

Description

Use this property to set or return the date and time the feed entry was last updated as a `DateTime` value. Initially, the Updated and Published properties have equivalent values. However, if the feed entry is changed, then Updated is different from Published.

This property is read/write.

Note

This is an abstract property.

Additional Feed Examples

This section provides examples of the following: Implementing a real-time feed request handler.

Implementing a Real-Time Feed Request Handler

The following example implements a real-time feed request handler from the `IRequestHandler` superclass.

! Important

For typical real-time feed requests, the default feed service operation (PTFP_GETFEED) and feed request handler should be sufficient. Unless there is specific functionality that is needed for a real-time feed request, use the default feed service operation. For scheduled feeds, the default service operation and hence the request handler cannot be modified.

```
import PS_PT:Integration:IRequestHandler;
import PTFP_FEED:UTILITY:Utility;
import PTFP_FEED:XML_FEED:FeedDoc;
import PTFP_FEED:UTILITY:FeedRequest;
import PTFP_FEED:Interface:IBGetFeedList;
import PTFP_FEED:FeedFactory;
import PTFP_FEED:EXCEPTION:*;
class MyFeedHandler implements PS_PT:Integration:IRequestHandler
  /* --- Properties --- */
  /* --- Methods --- */
  method MyFeedHandler();
  method OnRequest(&pRequestMsg As Message) Returns Message;
  method OnError(&pRequestMsg As Message) Returns string;
end-class;
/** onRequest is defined. Other methods shown as stubs. */
method MyFeedHandler
  /* method stub */
end-method;
method OnError
  /* &pRequestMsg as Message */
  /* Returns String */
  /* Extends/implements PS_PT:Integration:IRequestHandler.OnError */
  Local string &errstring;
  /* method stub */
  Return &errstring;
end-method;
/**
 * onRequest
 *
 * @param pRequestMsg Request Message.
 *
 * @exception FeedException thrown if switch user failed.
 *
 * @return Message Feed Document.
 */
method OnRequest
  /* &pRequestMsg as Message */
  /* Returns Message */
```

```

/+ Extends/implements PS_PT:Integration:IRequestHandler.OnRequest +/
Local boolean &succeeded;
Local integer &i;
Local string &temp, &name, &value;
Local string &errorText;
Local string &ibTransID, &pageNum, &HTTP_IfNoneMatch,
&HTTP_IfModifiedSince,⇒
&DefaultLocalNode;
Local Message &responseMsg;
Local XmlDocument &xmlDoc;
Local PTFP_FEED:FeedFactory &feedFactory_inst;
Local PTFP_FEED:UTILITY:Utility &utility = &feedFactory_inst.Utility;
Local PTFP_FEED:XML_FEED:FeedDoc &feedDoc;
Local PTFP_FEED:UTILITY:FeedRequest &request;
Local PTFP_FEED:Interface:IBGetFeedList &feedListObj;
/* Ccreate the Search Request object */
&request = create PTFP_FEED:UTILITY:FeedRequest("FeedRequest");
/* Get the search criteria */
For &i = 1 To
&pRequestMsg.IBInfo.IBConnectorInfo.GetNumberOfQueryStringArgs()
    &name = &pRequestMsg.IBInfo.IBConnectorInfo.GetQueryStringArgName(&i);
    &value = &pRequestMsg.IBInfo.IBConnectorInfo.GetQueryStringArgValue(&i);
    &succeeded = &request.addParameter(&name, &value);
    Evaluate Upper(&name)
    When Upper(&utility.QUERYPARAMETER_FEEDLIST)
        /* Feed List Request, forward the call */
        &feedListObj = create PTFP_FEED:Interface:IBGetFeedList();
        Return &feedListObj.OnRequest(&pRequestMsg);
    When Upper(&utility.QUERYPARAMETER_PORTALNAME)
        &request.PortalName = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_NODENAME)
        &request.NodeName = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_DATATYPEID)
        &request.DataTypeID = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_FEEDID)
        &request.FeedID = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_LANGUAGE)
        &request.LanguageCode = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_IBTRANSID)
        &ibTransID = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_PAGENUM)
        &pageNum = &value;
        Break;
    When Upper(&utility.QUERYPARAMETER_DEFLOCALNODE)
        &DefaultLocalNode = &value;
        Break;
    /* HTTP Conditonal Headers */
    When Upper(&utility.QUERYPARAMETER_IFNONEMATCH)
        &HTTP_IfNoneMatch = &value;
        Break;

```



```

        When Upper(&utility.QUERYPARAMETER_IFMODIFIEDSINCE)
            &HTTP_IfModifiedSince = &value;
            Break;
        End-Evaluate;
    End-For;
    /* Get the current user PS_TOKEN */
    &request.PS_TOKEN = GenToken();
    /* Get the FeedDoc */
    &errorText = "";
    try
        &feedDoc = &feedFactory_inst.getFeedDoc(&request);
    catch PTFP_FEED:EXCEPTION:NotFoundException &ex1
        &errorText = MsgGetExplainText(219, 3112, "(Message not found) Not
Found");
    catch PTFP_FEED:EXCEPTION:PrivilegeException &ex2
        &errorText = MsgGetExplainText(219, 3113, "(Message not found) ⇒
Not Authorized");
    catch PTFP_FEED:EXCEPTION:FeedException &ex3
        &errorText = &utility.getExceptionText(&ex3);
    end-try;
    /* Create the response message */
    &responseMsg = CreateMessage(Operation.PTFP_GETFEED, %IntBroker_Response);
    If None(&errorText) Then
        &responseMsg = &utility.setMessageHeadersAndMimeType(&responseMsg,
&feedDoc,⇒
&request);
    Else
        &temp = "<?xml version='1.0' encoding='UTF-8'?><ErrorMessage>" |
&errorText⇒
        | "</ErrorMessage>";
        &xmlDoc = CreateXmlDoc(&temp);
        &responseMsg.SetXmlDoc(&xmlDoc);
        &responseMsg.SegmentContentType = &utility.MIMETYPE_XML;
    End-If;
    Return &responseMsg;
end-method;

```

Field Class

Understanding the Field Class

A *field* object, instantiated from the field class, is a single instance of data within a record object, and is based on a field definition.

Accessing or changing the value of a field using the Value property is a common action.

SetDefault is a frequently used method. Name, Enabled, and Type are several commonly used field properties. If you are working with message objects, EditError is also a commonly used field property.

The field class is one of the data buffer access classes.

Related Topics

- PeopleCode Developer's Guide: Understanding Data Buffer Access

Considerations Using User Interface Properties

All of the field properties related to the user interface, such as the Label property, only return the value previously set in PeopleCode (false, or blank if nothing was set). They do not return the values set for the field in Application Designer.

Shortcut Considerations

An expression of the form

```
FIELD.fieldname.property
```

or

```
FIELD.fieldname.method(. . .)
```

is converted to an object expression by using GetField(FIELD.fieldname). For example, the next two lines of code are identical:

```
FIELD.CHECKLIST_DT.Enabled = False;
```

```
GetField(FIELD.CHECKLIST_DT).Enabled = False;
```

An expression of the form

```
recname.fieldname.property
```

or

```
recname.fieldname.method(. . .)
```

is converted to an object expression by using `GetField(recname.fieldname)`. For example, the next two lines of code are identical:

```
EMPL_CHECKLIST.CHECKLIST_DT.Enabled = False;
```

```
GetField(EMPL_CHECKLIST.CHECKLIST_DT).Enabled = False;
```

Data Type for a Field Object

Field objects are declared as type `Field`. For example,

```
Local Field &MyField;
```

Scope of a Field Object

A field can only be instantiated from `PeopleCode`.

This object can be used anywhere you have `PeopleCode`, that is, in an application class, Application Engine `PeopleCode`, record field `PeopleCode`, and so on.

Field Class Built-in Functions

PeopleCode Language Reference: `GetField` function

PeopleCode Language Reference: `GetPageField` function

PeopleCode Language Reference: `IsPIIandSensitiveForUser` function

PeopleCode Language Reference: `IsRecFieldPII` function

PeopleCode Language Reference: `IsRecFieldSensitive` function

Field Class Methods

In this section, we discuss the Field class methods in alphabetical order.

AddDropDownItem method: Field class

Syntax

```
AddDropDownItem(CodeString, DescriptionString)
```

Description

The `AddDropDownItem` method adds an item to the drop-down list in the control for the field. The first time this method is called, it overrides the prompt table or translate table used to

populate the list. Those items no longer appear in the list. Only the items added using this method display.

Subsequent calls to this method adds additional items to the drop-down list. The items added with the first call to the method also display.

If there is an existing value and the drop-down list is changed with these functions, the selection shows as (Invalid value) unless the new list contains an entry with the same code as the existing value.

Considerations Using AddDropDownItem

If the data for the drop down is language sensitive, the values for the drop down should come from the message catalog or from a database field that has a related language record, and should not be hard-coded.

A good place for your PeopleCode program to populate a drop-down list is in the RowInit event. This event executes before the page is shown for the first time, so it prevents unnecessary SQL.

Parameters

Parameter	Description
<i>CodeString</i>	Specify the value used to set the field value if this item is selected. Codes longer than the size of the field are truncated.
<i>DescriptionString</i>	Specify the value the end-user sees in the drop-down list.

Returns

None.

Example

Using a hardcoded list is not appropriate for this function because translations do not work. The data must come from the Translate Table (or other record) directly so that the data is translated correctly.

```
Local Rowset &Xlat;

&FLD = GetRecord(Record.JOB).GetField(Field.ACTION);
&FLD.ClearDropDownList();

Evaluate %Component
When Component.JOB_DATA_CONCUR
    &Xlat = CreateRowset(Record.PSXLATITEM);
    &Xlat.Fill("WHERE FILL.FIELDNAME = 'ACTION' AND FILL.FIELDVALUE in =>
('ADL','HIR') and EFFDT = (select max(EFFDT) from PSXLATITEM B where
B.FIELDNAME =>
'ACTION' and B.FIELDVALUE in ('ADL','HIR') and EFFDT <= JOB.EFFDT)");
    &Xlat_cnt = &Xlat.ActiveRowCount;
    For &I = 1 To &Xlat_cnt
        &CodeIn = &Xlat.GetRow(&I).GetRecord(1).FIELDVALUE.Value;
        &DescIn = &Xlat.GetRow(&I).GetRecord(1).XLATLONGNAME.Value;
        &FLD.AddDropDownItem(&CodeIn, &DescIn);
    End-For;
```

```
Break;  
When-Other  
End-Evaluate;
```

Related Topics

- [ClearDropDownList method: Field class](#)

AddFFClass method: Field class

Syntax

```
AddFFClass(style_names)
```

Description

Use the AddFFClass method to update the value of the FreeFormStyleName property. This method appends free form style classes to any existing styles defined by the FreeFormStyleName property for this field.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>style_names</i>	Specifies the style names as a string value.

Returns

None.

Example

```
&fld1.AddFFClass("active color_red");
```

Related Topics

- [ReplaceFFClass method: Field class](#)
- [FreeFormStyleName property: Field class](#)

ClearDropDownList method: Field class

Syntax

```
ClearDropDownList()
```

Description

The ClearDropDownList method clears all items added to the drop-down list using the AddDropDownItem method. In addition, this method causes the prompt table or translate table values defined for the list to come back into effect again (unless they're subsequently overridden again with AddDropDownItem.)

Parameters

None.

Returns

None.

Example

```
&FLD = GetRecord(Record.ABSENCE_HIST).GetField(Field.ABSENCE_TYPE);
&FLD.AddDropDownItem("CNF", "Conference");
&FLD.AddDropDownItem("VAC", "Vacation");
&FLD.AddDropDownItem("SCK", "Sick");
. . .
&FLD.ClearDropDownList();
```

Related Topics

- [AddDropDownItem method: Field class](#)

CopyDisplayMask method: Field class

Syntax

CopyDisplayMask(*Field_Object*)

Description

Use the CopyDisplayMask method to copy the masking information from the source field object to the target field. The field that calls the CopyDisplayMask() method is the target field, and the field that is passed as a parameter of the method is the source field.

Parameters

Parameter	Description
<i>Field_Object</i>	Specifies the source field object as a String value. This field is the source field that will be copied to the target field.

Returns

A Boolean value. True if the target field is assigned masking information; False otherwise.

Example

```
&sourcefield = GetField(Field.RECNAME);
&sourcefield.SetDisplayMask("****@@@");
&sourcevalue = &sourcefield.FormattedValue;
&targetfield = GetField(Field.AE_BIND_VALUE);
&targetvalue = &targetfield.FormattedValue;
&mymsg = "Before CopyDisplayMask Field.RECNAME is " | &sourcevalue | " and
Field.AE_BIND_VALUE is " | &targetvalue;
MessageBox(0, "Before CopyDisplayMask", 0, 0, &mymsg);
&bool = &targetfield.CopyDisplayMask(&sourcefield);
&targetvalue = &targetfield.FormattedValue;
&mymsg = "After CopyDisplayMask Field.AE_BIND_VALUE is " | &targetvalue;
MessageBox(0, "After CopyDisplayMask", 0, 0, &mymsg);
```

Related Topics

- [SetDisplayMask method: Field class](#)
PeopleTools provides two variations of the SetDisplayMask field class method. Both the variations are described in this topic.
- [UnSetDisplayMask method: Field class](#)

GetAuxFlag method: Field class

Syntax

GetAuxFlag(*FlagNumber*)

Description

Use the GetAuxFlag method to determine whether the Auxiliary Flag Mask specified by *FlagNumber* has been set for a field.

Currently, only one flag comes preset from PeopleSoft: a 1 indicates a ChartField.

Parameters

Parameter	Description
<i>FlagNumber</i>	Specify the flag number. 1 is a ChartField. Valid values are between 1 and 16.

Returns

A Boolean value: True, the flag is set, False if the flag hasn't been set.

Example

```
&field = GetField(Field.RC_TEST_PB);
&ret = &field.GetAuxFlag(1);
If (&ret = True) Then
    MessageBox(0, "Metadata Fn Status", 0, 0, "Aux Flag 1 is SET -
ChartField");
Else
```

```
        MessageBox(0, "Metadata Fn Status", 0, 0, "Aux Flag 1 is NOT SET - Not a  
Chart⇒  
Field");  
End-If;
```

Related Topics

- [PeopleCode Language Reference: SetDBFieldAuxFlag function](#)

GetBaseName method: Field class

Syntax

```
GetBaseName()
```

Description

Use the GetBaseName method to return the value of the Page Field Name field if it is defined on the field's General tab. Otherwise, the method returns the name of the page field as *RECORD_NAME_FIELD_NAME*.

Note

This differs from the Name property, which returns the FIELD_NAME value only.

Important

Use this method within fluid applications only.

Parameters

None.

Returns

A String value.

Example

```
&nm = PTNUI_ADDT_WRK.GROUPBOX7.GetBaseName();
```

Related Topics

- [Name property: Field class](#)

GetDNDField method: Field class

Syntax

```
GetDNDField()
```


Description

Use the GetDNDField method to return the field from which the drag started—that is, the source field.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Field object.

Example

```
Local Field &field1 = GetDNDField();
```

Related Topics

- [GetDNDRow method: Field class](#)
- [GetDNDRowset method: Field class](#)
- [Draggable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetDNDRow method: Field class

Syntax

```
GetDNDRow()
```

Description

Use the GetDNDRow method to return the row from which the drag started—that is, the source row.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Row object.

Example

```
Local Row &dragRow = GetDNDRow();  
Local integer &fromRowNum = &dragRow.RowNumber;
```

Related Topics

- [GetDNDField method: Field class](#)
- [GetDNDRowset method: Field class](#)
- [Draggable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetDNDRowset method: Field class

Syntax

```
GetDNDRowset()
```

Description

Use the GetDNDRowset method to return the rowset from which the drag started—that is, the source rowset.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Rowset object.

Example

```
Local Rowset &rs = GetDNDRowset();
```

Related Topics

- [GetDNDField method: Field class](#)
- [GetDNDRow method: Field class](#)
- [Draggable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetDNDTargetField method: Field class

Syntax

```
GetDNDTargetField()
```

Description

Use the `GetDNDTargetField` method to return the field on which the drop occurred—that is, the target field.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Field object.

Example

```
Local Field &field2 = GetDNDTargetField();
```

Related Topics

- [GetDNDTargetRow method: Field class](#)
- [GetDNDTargetRowset method: Field class](#)
- [Droppable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetDNDTargetRow method: Field class

Syntax

```
GetDNDTargetRow()
```

Description

Use the `GetDNDTargetRow` method to return the row on which the drop occurred—that is, the target row.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Row object.

Example

```
Local Row &toRow = GetDNDTargetRow();  
Local integer &toRowNum = &toRow.RowNumber;
```

Related Topics

- [GetDNDTargetField method: Field class](#)
- [GetDNDTargetRowset method: Field class](#)
- [Droppable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetDNDTargetRowset method: Field class

Syntax

```
GetDNDTargetRowset()
```

Description

Use the GetDNDTargetRowset method to return the rowset on which the drop occurred—that is, the target rowset.

! Important

Use this method within fluid applications only.

Parameters

None.

Returns

A Rowset value.

Example

```
Local Rowset &rs2 = GetDNDTargetRowset();
```

Related Topics

- [GetDNDTargetField method: Field class](#)
- [GetDNDTargetRow method: Field class](#)
- [Droppable property: Field class](#)
- Fluid User Interface Developer's Guide: Setting Group Box Properties

GetLongLabel method: Field class

Syntax

`GetLongLabel(LabelID)`

Description

The `GetLongLabel` method returns the long name for a field given a label ID. If the given label ID isn't found, a null string is returned. *LabelID* takes a string value.

Note

If a button is defined as an HTML button or hyperlink, and if it has an associated record field, the label associated with it is only the text of the button. The mouse-over text can only be changed by the label if the button is defined as a button with an Image label.

Returns

A text string containing the long name of the field for the specified label ID.

Example

The following code sets the label for a field to one of two different texts, based on the page.

```
Local Field &FIELD;  
  
&FIELD = GetField(RECORD.MYFIELD);  
  If %Page = PAGE.PAGE1 Then  
    &FIELD.Label = &FIELD.GetLongLabel("LABEL1");  
  Else If %Page = PAGE.PAGE2 Then  
    &FIELD.Label = &FIELD.GetLongLabel("LABEL2");  
End-If;
```

If the Label ID is the same as the name of the field, you could use the following:

```
&LABELID = &FIELD.Name;  
&FIELD.Label = &FIELD.GetLongLabel(&LABELID);
```

Related Topics

- [GetShortLabel method: Field class](#)
- [Label property: Field class](#)

- PeopleCode Language Reference: SetLabel function

GetRelated method: Field class

Syntax

`GetRelated(recname.fieldname)`

Description

The `GetRelated` method returns a field object for a related field *recname.fieldname* that has the field executing the method as its control field.

This method is similar to the `GetRelField` built-in function, however, the built-in works only in the current context, while this method can be applied to a field from any position in the buffer structure.

Parameters

Parameter	Description
<i>recname.fieldname</i>	Specifies a field in the same row as the current field object, that has the field executing the method as its control field.

Returns

The field object for the field with the specified name that is related to the field executing the method.

Example

In the following example, the field object is instantiated, then the related display field object. The `Value` property for the related display is changed, it is disabled, and another variable is assigned its value.

```
Local Field &FIELD, &REL_FIELD;

&FIELD = GetField(OPC_9A2FIELDS.COMPANY);
/* control field object */
&REL_FIELD = &FIELD.GetRelated(COMPANY_TBL.DESCR);
/* related display object */
&REL_FIELD.Value = "Change";
&REL_FIELD.Enabled = False;
&TMP = &REL_FIELD.Name;
&REL_FIELD.Value = &TMP;
```

If you were not going to use the `&FIELD` variable later, the first two lines of code in the previous example could be combined:

```
&REL_FIELD = GetField(OPC_9A2FIELDS.COMPANY).GetRelated(COMPANY_TBL.DESCR);
```

Suppose you had two control fields, EMPLID and MANAGER_ID, and both use the NAME field on the PERSONAL_DATA table as their related display. If you need to access both related display fields, you could do the following:

```
&NAME_EMPLID = GetField(PERSONAL_DATA.EMPLID).GetRelated(PERSONAL_DATA.NAME);
```

```
&NAME_MANAGER =  
GetField(PERSONAL_DATA.MANAGER_ID).GetRelated(PERSONAL_DATA.NAME);
```

Using GetRelated With a Control Field

PeopleCode events on the Control Field can be triggered by the Related Edit field. When this happens, there can be different behavior than with other types of fields:

- If the events are called from FieldEdit of the Control Field, and that FieldEdit is triggered by a change in the Related Edit field, the functions return the previous value.
- If the events are called from FieldChange of the Control Field, and that FieldChange is triggered by a change in the Related Edit field, the functions return the value entered into the Related Edit. This may be a partial value, that will subsequently be expanded to a complete value when the processing is complete.

Related Topics

- PeopleCode Language Reference: GetField function

GetShortLabel method: Field class

Syntax

```
GetShortLabel(LabelID)
```

Description

The GetShortLabel method returns the short name for a field given a label ID. If the given label ID isn't found, a null string is returned. *LabelID* takes a string value.

Note

If a button is defined as an HTML button or hyperlink, and if it has an associated record field, the label associated with it is only the text of the button. The mouse-over text can only be changed by the label if the button is defined as a button with an Image label.

Returns

A text string containing the short name of the field for the specified label ID.

Example

The following code sets the label for a field to one of two different texts, based on the page.

```
Local Field &FIELD;
```

```
&FIELD = GetField(RECORD.MYFIELD);  
  If %Page = PAGE.PAGE1 Then  
    &FIELD.Label = &FIELD.GetShortLabel("LABEL1");  
  Else If %Page = PAGE.PAGE2 Then  
    &FIELD.Label = &FIELD.GetShortLabel("LABEL2");  
End-If;
```

If the Label ID is the same as the name of the field, you could use the following:

```
&LABELID = &FIELD.Name;  
&FIELD.Label = &FIELD.GetShortLabel(&LABELID);
```

Related Topics

- [GetLongLabel method: Field class](#)
- [Label property: Field class](#)
- PeopleCode Language Reference: SetLabel function

ReplaceFFClass method: Field class

Syntax

```
ReplaceFFClass(from_style, to_style, append)
```

Description

Use the ReplaceFFClass method to update the value of the FreeFormStyleName property. This method replaces the *from_style* with the *to_style*. If the *from_style* does not exist, the *to_style* is added to the style list, only if the optional *append* parameter is True.

Note

ReplaceFFStyle can only replace the styles set through PeopleCode using the AddFFClass method or the FreeFormStyleName property and the not those set through Application Designer.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>from_style</i>	Specifies the style (or list of styles) to be replaced as a string value.
<i>to_style</i>	Specifies the replacement style (or list of styles) as a string value.

Parameter	Description
<i>append</i>	Specifies a Boolean value indicating whether the <i>to_style</i> value is to be appended when the <i>from_style</i> does not exist. The default value is False.

Returns

None.

Example

```
&field1.ReplaceFFClass("dateStyle", "emphasis");  
&field2.ReplaceFFClass("hidden", "");
```

Related Topics

- [AddFFClass method: Field class](#)
- [FreeFormStyleName property: Field class](#)

RemoveDropDownItem method: Field class

Syntax

```
RemoveDropDownItem(CodeString)
```

Description

The RemoveDropDownItem method removes an item from the drop-down list in the control for the field.

The value that you pass to RemoveDropDownItem identifies the drop-down item to remove. The value is case-sensitive. If the value is longer than the field length of the drop-down field, the system truncates the value for comparison.

Considerations Using RemoveDropDownItem

Note the following considerations:

- RemoveDropDownItem works with both system-generated drop-down lists, which are populated from prompt tables or translate values, and custom drop-down lists created by using AddDropDownItem.
- The changes made by this method are not persisted and remain in effect only while the field exists in the component buffer.
- You can call RemoveDropDownItem from any PeopleCode event. However, a good place for your PeopleCode program to remove a drop-down item is in the RowInit event.
- If the drop-down field is not marked as Required, the system prepends a blank item to the drop-down list. You cannot remove this blank item by using RemoveDropDownItem.
- If the item that you specify is not in the drop-down list, no error occurs.
- You can remove all items from a drop-down list. However, application developers must handle such situations in their code, such as by hiding the field.

- If you remove the currently selected item, the field displays (Invalid Value). The user can still save the page, and the underlying field value remains unchanged.
- If you call `RemoveDropDownItem` on a PeopleCode field that does not represent a drop-down field, the user interface does not change and no error occurs.
- If a default value is defined for the drop down, `RemoveDropDownItem` treats it the same as any other drop-down item and removes it when specified.

Parameters

Table 25-1 Parameters and descriptions for the `RemoveDropDownItem` method

Parameter	Description
<i>CodeString</i>	Specify the case-sensitive code string for the drop-down item to remove. For translate table drop-downs, specify the translate value. For prompt table drop-downs, specify the value from the prompt table key field, or from the designated prompt table field when the page field is not a key field on the prompt table. For custom drop-downs, specify the code string that was passed to the <code>AddDropDownItem</code> method when the drop-down item was added.

Returns

None.

Example

```
Local Field &fSort1 = GetField(EM_SELPRES_WRK.EM_VCHR_INQ_SORT1);

&fSort1.RemoveDropDownItem("B");
/* Where "B" is one of the translate values for the field EM_VCHR_INQ_SORT1 */
```

Related Topics

- [AddDropDownItem method: Field class](#)

SearchClear method: Field class

Syntax

```
SearchClear()
```

Description

The `SearchClear` method clears the field values if the field is a search key.

Parameters

None.

Returns

None.

Example

```
Local Field &FIELD;  
  
&FIELD = GetField(PERSONAL_DATA.EMPLID);  
&FIELD.SearchClear();
```

Considerations Using SearchClear and SetDefault

The SetDefault method causes a field to be set to its default value (if there is one) immediately after SearchInit PeopleCode finishes. SetDefault overrides SearchClear. If you call SearchClear for a record, then use SetDefault for a field, the field is set to its default value and the search key values for the rest of the record are cleared.

Related Topics

- [SetDefault method: Field class](#)
- [SearchClear method: Record class](#)

SetCursorPos method: Field class

Syntax

```
SetCursorPos(Page.page_name | %Page)
```

Description

The SetCursorPos method enables you to set the focus to the page field corresponding to the current Field object (on the specified page). The current page may be specified as %Page.

Parameters

Parameter	Description
Page.page_name	The name of the page, preceded by the keyword Page. The <i>page_name</i> page must be in the current component. You can also pass the %Page system variable in this parameter (without the Page reserved word).

Returns

None.

Example

The following pseudo-code enables you to set the focus to a related field:

```
GetField(ControlRec.ControlField).GetRelated(RelatedRec.RelatedField).SetCursorPos⇒  
(Page.pagename);
```

The following example places the cursor in the current field if a SaveEdit validation fails. Note the use of the %Page system variable to get the page name. Note also that SetCursorPos is called before Error.

```
If None(DERIVED_SECURITY.OPERPSWD) Then
    GetField(DERIVED_SECURITY.OPERPSWD).SetCursorPos(%Page);
    Error MsgGet(48, 268, "Message Not Found");
End-If;
```

Restrictions on Use with a Component Interface

This method is ignored (has no effect) when used by a PeopleCode program that's been called by a component interface.

Related Topics

- [SetDefault method: Field class](#)
- PeopleCode Language Reference: SetCursorPos function

SetDefault method: Field class

Syntax

```
SetDefault()
```

Description

SetDefault sets the value of the field to a null value, or to a default, depending on the type of field.

- If this method is used against data from the component buffers, the next time default processing occurs, it is set to its default value: either a default specified in its record field definition or one set programmatically by PeopleCode located in a FieldDefault event. If neither of these defaults exist, the Component Processor leaves the field blank.
- If this method is used with a field that isn't part of the data buffer (for example, a field in a record object instantiated with CreateRecord) the field is automatically set to its default value if one is set for the *field*, not for the record field. Any FieldDefault PeopleCode will not be run on these types of fields. If you want to set the default values for all the fields in a record, use the SetDefault record class method.

Blank numbers correspond to zero on the database. Blank characters correspond to a space on the database. Blank dates and long characters correspond to NULL on the database. SetDefault gives each field data type its proper value.

Parameters

None.

Returns

None.

Example

```
&CHARACTER.SetDefault();
```

Related Topics

- [SetDefault method: Record class](#)
- PeopleCode Developer's Guide: Default Processing

SetDisplayMask method: Field class

PeopleTools provides two variations of the SetDisplayMask field class method. Both the variations are described in this topic.

Syntax

First variation of the method:

```
SetDisplayMask(Mask_Char, Unmasked_Trailing_Chars)
```

Description

Use the SetDisplayMask method to mask all or some of the data displayed in certain PIA page controls. The method replaces each character of the displayed field text value with the chosen masking character. The method provides the ability to choose the number of trailing characters to remain unmasked. This method affects the same PIA displays that honor Custom Field Formatting. Once the mask is set, it is persisted within the component. If the value is changed, the masking character is re-applied on the next server trip. The method can be called using event mapping and can be used in combination with IsUserInRole(), IsUserInPermissionList(), or IsPIIandSensitiveForUser() functions to control who can or should not see the unmasked information.

Note

Masking applies to field length; not data length. For example, in a 100 character field, the field would be padded or filled to 100 characters.

Parameters

Parameter	Description
<i>Mask_Char</i>	Specifies a single character value used for masking data (only first character is used if more than one character is entered).
<i>Unmasked_Trailing_Chars</i>	Specifies the number of trailing characters to remain unmasked.

Returns

None.

Example

```
&field = GetField(Field.AE_BIND_VALUE);  
&field.SetDisplayMask("*", 4);  
&value = &field.FormattedValue;
```

```
&mymsg = "Field.AE_BIND_VALUE is " | &value;  
MessageBox(0, "SetDisplayMask", 0, 0, &mymsg);
```

Syntax

Second variation of the method:

```
SetDisplayMask(Mask_Pattern)
```

Description

Use the SetDisplayMask method to mask all or some of the data displayed in certain PIA page controls. The method replaces the displayed field text value with a mask pattern that you define. This method affects the same PIA displays that honor Custom Field Formatting. Once the mask is set, it is persisted within the component. If the value is changed, the masking character is re-applied on the next server trip. The method can be called using event mapping and can be used in combination with IsUserInRole(), IsUserInPermissionList(), or IsPIIandSensitiveForUser() functions to control who can or should not see the unmasked information.

Note

If the data length matches the mask pattern length, the mask pattern will be applied and as a result data will be masked to the data length. However, if the mask pattern length does not match the data length, the field will be fully masked to the field length with the first character of the mask pattern.

Parameters

Parameter	Description
<i>Mask_Pattern</i>	Specifies a pattern to mask the actual data. Consider the following when specifying a masking pattern: • The length of the mask pattern should match the data length of the field being masked. • Use the @ character to print the actual data in the position where it is used. For example, if the field value is New York, and the mask pattern is <code>SetDisplayMask("****@@@")</code>, the masked field displays as <code>****York</code>. • Use any other character to print the character instead of the actual data in the position where it is used. For example, if the field value is New York, and the mask pattern is <code>SetDisplayMask("@@p-**hp")</code>, the masked field displays as <code>Nep-**hp</code>. • If the length of the mask pattern does not match the length of the data being masked, then the first character of the mask pattern will be used to mask the entire field. For example, if the field value is New York, and the mask pattern is <code>SetDisplayMask("@****@@@@")</code>, the masked field displays as <code>@@@@@@@@@</code>.

Returns

None.

Example

```
&field = GetField(Field.AE_BIND_VALUE);
&field.SetDisplayMask("****@@@");
&value = &field.FormattedValue;
&mymsg = "Field.AE_BIND_VALUE is " | &value;
MessageBox(0, "SetDisplayMask", 0, 0, &mymsg);
```

Related Topics

- [CopyDisplayMask method: Field class](#)
- [UnSetDisplayMask method: Field class](#)

SetGroupletActionUrl method: Field class

Syntax

```
SetGroupletActionUrl(URL)
```

Description

Use the `SetGroupletActionUrl` method to set the target content URL to which the user is transferred when the user taps the grouplet or tile.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL as a string value.

Returns

None.

Example

```
PT_AG_LAYOUT.PT_AG_GROUPBOX3.SetGroupletActionUrl("http://  
example.com:8080/psc/ps5/EMPLOYEE/HRMS/s/  
WEBLIB_PTAI.ISCRIPT1.FieldFormula.IScript_LoadSubpageButtons?  
PTAI_LIST_ID=PTIB_IBCFG1001&fmode=1");
```

Related Topics

- [SetGroupletDisplayIn method: Field class](#)

SetGroupletDisplayIn method: Field class

Syntax

```
SetGroupletDisplayIn(display_in)
```

Description

Use the `SetGroupletDisplayIn` method to set the location where the target content for the grouplet or tile will be displayed.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>display_in</i>	Specifies the display location as an Integer constant.

Use the following integer constants (integer values are provided for reference only):

Numeric Value	Constant Value	Description
0	%GroupletActionInCurrentWindow	Display the content in the current browser window.
1	%GroupletActionInNewWindow	Display in a new browser window.
2	%GroupletActionInModal	Display in a modeless modal window.
3	%GroupletActionNavBarGrouplet	Display in the NavBar (used by NavBar tiles only).
4	%GroupletActionNavBarUrlInCurrentWindow	Display in the current browser window (used by NavBar tiles only).
6	%GroupletActionAGTargetFluid	Display the fluid component within the activity guide.
7	%GroupletActionMDTargetFluid	Display the fluid component within the master/detail target area.
8	%GroupletActionMDTargetClassic	Display the classic component within the master/detail target area.
9	%GroupletActionAGTargetClassic	Display the classic component within the activity guide.

Returns

None.

Example

```
PT_AG_LAYOUT.PT_AG_GROUPBOX3.SetGroupletDisplayIn(%GroupletActionInCurrentWindow);
```

Related Topics

- [SetGroupletActionUrl method: Field class](#)
- [DisplayIn property: Content Reference class](#)

SetGroupletEventMsg method: Field class

Syntax

```
SetGroupletEventMsg (push_event)
```

Description

Use the `SetGroupletEventMsg` method to specify the name of a push notification event used to dynamically update the tile's content.

Parameters

Parameter	Description
<i>push_event</i>	Specifies the push notification event name as a String value.

Returns

None.

Example

```
&rec.GROUPLET.SetGroupletEventMsg("MY_EVENT");
```

Related Topics

- [EventName property: Content Reference class](#)

SetGroupletID method: Field class

Syntax

```
SetGroupletID(field_ID)
```

Description

Use the `SetGroupletID` method to set the ID of the group box (the page field name) from which the content is rendered.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>field_ID</i>	Specifies the page field name of the group box as a string value.

Returns

None.

Example

```
PT_AG_LAYOUT.PT_AG_GROUPBOX3.SetGroupletID("GROUPBOX5");
```

Related Topics

- [SetGroupletType method: Field class](#)
- [GroupletId property: Content Reference class](#)

SetGroupletImage method: Field class

Syntax

```
SetGroupletImage(image_ID)
```

Description

Use the SetGroupletImage method to specify the image ID for the static image to be displayed on the grouplet or tile.

Note

If dynamic content is also configured for the grouplet, this "pre-load" image is displayed while the dynamic content for the tile is being retrieved and loaded.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>image_ID</i>	Specifies the database ID for the image as a string value.

Returns

None.

Example

```
&rec.GROUPLET.SetGroupletImage(&rec.IMAGE_NAME.Value);  
  
&RS_OPTN(1).PSSCWORDDEFN.SCNEGWORDFLG.SetGroupletImage("PROFILE_64");
```

Related Topics

- [SetGroupletImageUrl method: Field class](#)

- [GroupletImageName property: Content Reference class](#)

SetGroupletImageUrl method: Field class

Syntax

```
SetGroupletImageUrl(image_URL)
```

Description

Use the SetGroupletImageUrl method to specify a fully formed URL for the static image to be displayed on the grouplet or tile.

Note

If dynamic content is also configured for the grouplet, this "pre-load" image is displayed while the dynamic content for the tile is being retrieved and loaded.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>image_URL</i>	Specifies the fully formed URL for the image as a String value.

Returns

None.

Example

```
&rec.GROUPLET.SetGroupletImageUrl(&remoteImageUrl);
```

Related Topics

- [SetGroupletImage method: Field class](#)

SetGroupletMOptions method: Field class

Syntax

```
SetGroupletMOptions(modal_options)
```

Description

Use the `SetGroupletMOptions` method to set the modal options for the grouplet or tile.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>modal_options</i>	Specifies custom modal options as a String value. See Fluid User Interface Developer's Guide: Modal Options for more information.

Returns

None.

Example

```
/* Action Menu */
Local string &sMenuTitle = MsgGetText(124, 524, "Message Not Found: Action
Menu");
PTLAYOUT.HEADER_ACTIONGROUP.SetGroupletMOptions("sTitle@" | &sMenuTitle |
";bAutoClose@1;bMask@1;bHeader@0;");
```

Related Topics

- [DisplayModalParams property: Content Reference class](#)

SetGroupletTargetID method: Field class

Syntax

`SetGroupletTargetID(target_ID)`

Description

Use the `SetGroupletTargetID` method to set the target ID attribute of the NavBar tile.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>target_ID</i>	Specifies the target ID attribute as a String value.

Returns

None.

Example

```
&RS_OPTN(&I).QE_GROUPLET.QE_GRPDESCR.SetGroupletTargetID("TARGETGROUP$0"); /*  
NEW TARGET ID*/
```

SetGroupletTimer method: Field class

Syntax

```
SetGroupletTimer(time_in_seconds)
```

Description

Use the SetGroupletTimer method to set the time in seconds after which the grouplet or tile will be refreshed with the source content.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>time_in_seconds</i>	Specifies the time in seconds after which the tile is refreshed with the source content, as an integer value.

Returns

None.

Example

```
&rec.GROUPLET.SetGroupletTimer(100);
```

Related Topics

- [GroupletTimer property: Content Reference class](#)

SetGroupletType method: Field class

Syntax

```
SetGroupletType(type)
```

Description

Use the SetGroupletType method to set the type of grouplet.

A grouplet is the encapsulation of content from one source (for example, a component, an iScript, or external content) that is presented within the context of another fluid application page. Tiles, embedded related content, and related information are all examples of grouplets. In each of these scenarios, the grouplets are created by the system at runtime based solely on configuration details. However, you can use this and other methods and properties of the Field class to generate grouplets from group box fields programmatically.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>type</i>	Specifies the type for the grouplet as an integer constant.

Use the following integer constants (integer values are provided for reference only):

Numeric Value	Constant Value	Description
0	%GroupletNone	Not a grouplet (also referred to as a tile). This is a regular group box with its content coming from the same page records.
1	%GroupletWithStyle	Grouplet with style. This producer tile includes its own style sheets, JavaScript, or both. Important: Be aware that this setting can inject style settings or JavaScript code that conflicts with those defined for the page.
2	%GroupletNoStyle	Grouplet without style. This producer tile does not include style sheets or JavaScript. Note: This is the recommended setting.
3	%GroupletIframe	Interactive grouplet.
4	%GroupletIframeExt	Interactive grouplet for external content.
5	%GroupletIframeAutoSize	Interactive grouplet with autosizing. Note: Use this setting for homepage and dashboard tiles only.

Numeric Value	Constant Value	Description
6	%GroupletIframeExtAutoSize	Interactive grouplet for external content with autosizing. Note: Use this setting for homepage and dashboard tiles only.
7	%GroupletIframeVAutoSize	Interactive grouplet with vertical autosizing. The system will autosize the grouplet height based on the content at initial load. The grouplet will be automatically resized by the system when: • The window is resized. • Any field change or server trip is invoked within the grouplet. • Any group boxes within the grouplet are expanded or collapsed. • When either side panel is opened or closed.

! Important

While a grouplet can be defined as interactive, you should be aware of the limitations. See the section, "Limitations with Interactive Grouplets," in Portal Technology: Fluid Related Content for more information.

Returns

None.

Example

```
/* Use the following three methods to create a display-only grouplet.      */
&fld.SetGroupletType(%GroupletNoStyle);
/* Specifies the grouplet's source content */
&fld.SetGroupletUrl(&src_URL);
/* Specifies the group box's page field name. Not used with interactive */
/* grouplets, which render the entire component.                        */
&fld.SetGroupletID("GRPLTC_NOINTER");
```

Related Topics

- [SetGroupletID method: Field class](#)
- [SetGroupletUrl method: Field class](#)
- [GroupletType property: Content Reference class](#)
- Fluid User Interface Developer's Guide: Creating Grouplets with PeopleCode
- Portal Technology: Setting Fluid Attributes for Content References
- Fluid User Interface Developer's Guide: Working with Embedded Related Content

SetGroupletUrl method: Field class

Syntax

```
SetGroupletUrl(URL)
```

Description

Use the SetGroupletUrl method to set the source URL from which the grouplet or tile content is rendered.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL as a string value.

Returns

None.

Example

```
/* Specifies the grouplet's source content */  
&fld.SetGroupletUrl(&src_URL);
```

Related Topics

- [SetGroupletType method: Field class](#)
- [GroupletContentURL property: Content Reference class](#)
- Fluid User Interface Developer's Guide: Creating Grouplets with PeopleCode

SetImageUrl method: Field class

Syntax

```
SetImageUrl(image_URL)
```

Description

Use the SetImageUrl method to specify a fully formed URL for the static image to be associated with page field of type image (that is, an image associated with a record field).

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>image_URL</i>	Specifies a fully formed URL for the image as a String value.

Returns

None.

Example

```
PTGP_GPLT_WRK.PTGP_CONTEXT_IMG.SetImageUrl(&thisImage.ImageUrl);  
PTGP_GPLT_WRK.PTGP_CONTEXT_IMG.Label = &thisImage.AltText;
```

UnSetDisplayMask method: Field class

Syntax

```
UnSetDisplayMask()
```

Description

Use the UnSetDisplayMask method to remove any previous masking that was applied using SetDisplayMask().

Parameters

None.

Returns

None.

Example

```
&field = GetField(Field.AE_BIND_VALUE);  
&field.UnSetDisplayMask("****@@@");  
&value = &field.FormattedValue;  
&mymsg = "Field.AE_BIND_VALUE is " | &value;  
MessageBox(0, "UnSetDisplayMask", 0, 0, &mymsg);
```

Related Topics

- [CopyDisplayMask method: Field class](#)

- [SetDisplayMask method: Field class](#)
PeopleTools provides two variations of the SetDisplayMask field class method. Both the variations are described in this topic.

Field Class Properties

In this section, we discuss the Field class properties. The properties in this section are described in alphabetical order.

AriaAttributes property: Field class

Description

Use this property to set or return the Accessible Rich Internet Applications (ARIA) attributes for the page element only within the HTML (for example, for an a, input, textarea, or other HTML element). This can be compared to the AriaWrapperAttributes property that pertains to the outermost layer of the page element's structure in the HTML.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

The following example sets the ARIA attributes for the contents of the NavBar:

```
&nbc.AriaAttributes = "role='menuitem' aria-haspopup='true'";
```

AriaWrapperAttributes property: Field class

Description

Use this property to set or return the ARIA attributes for the outermost layer of the page element's structure in the HTML (for example, the outermost div element). This can be compared to the AriaAttributes property that pertains to the page element only.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

The following example sets attributes for the div element that wraps the group box that represents the fluid banner:

```
PTLAYOUT.HEADER_GROUPBOX1.AriaWrapperAttributes = "role=""banner""";
```

DataAreaCollapsed property: Field class

Description

This property specifies whether the default initial view of the data area of a group box is collapsed or expanded.

Note

You must set the **Collapsible Data Area** on the properties for the group box in Application Designer for this property to have any effect.

This property changes to reflect the current state of the data area, according to whether the user has collapsed or expanded it. Changing the value collapses or expands the data area, but it does *not* prevent the user from collapsing (or expanding) it themselves.

Note

Because the user can change the value of this property, whatever value is set in PeopleCode isn't guaranteed to be still set the next time it is checked, because the user may have collapsed or expanded the data area in the meantime.

This property overwrites the value of the **Default Initial View to Expanded** field set in Application Designer. For example, if **Default Initial View to Expanded** is selected in Application Designer, then the value for the DataAreaCollapsed property is set to True, the control initially displays collapsed.

This property takes a Boolean value: True, initially display the data area collapsed, False, initially display the data area expanded.

This property is read/write.

Note

If you want to collapse an entire level-based control, such as a scroll area or a grid, use the DataAreaCollapsed Rowset method.

Related Topics

- [DataAreaCollapsed property: Rowset class](#)

DecimalPosition property: Field class

Description

Use this property to specify the number of digits after the decimal point to be displayed for a field defined as number or signed number.

This property *overwrites* the **Decimal Positions** value defined for a field in Application Designer.

Setting the DecimalPosition property to a smaller number than the record field's decimal position causes the displayed data to be truncated. For example, suppose a numeric field in the database has a value 0.005. Setting DecimalPosition to 2 displays 0.00 on page.

This property takes an integer value. The default value is -1, which indicates that the property is not set.

This property is read/write.


Related Topics

- Application Designer Developer's Guide: Specifying Number Field Attributes

DisplayFormat property: Field class

Description

The following image is an example of PHONE-INTL format. Use this property to specify a custom format to use for the field. This property is read/write. The custom format for a field is specified in the field definition. This property enables you to switch between display formats that are defined as part of a custom format. For example, suppose your field used the PHONE-INTL custom format:

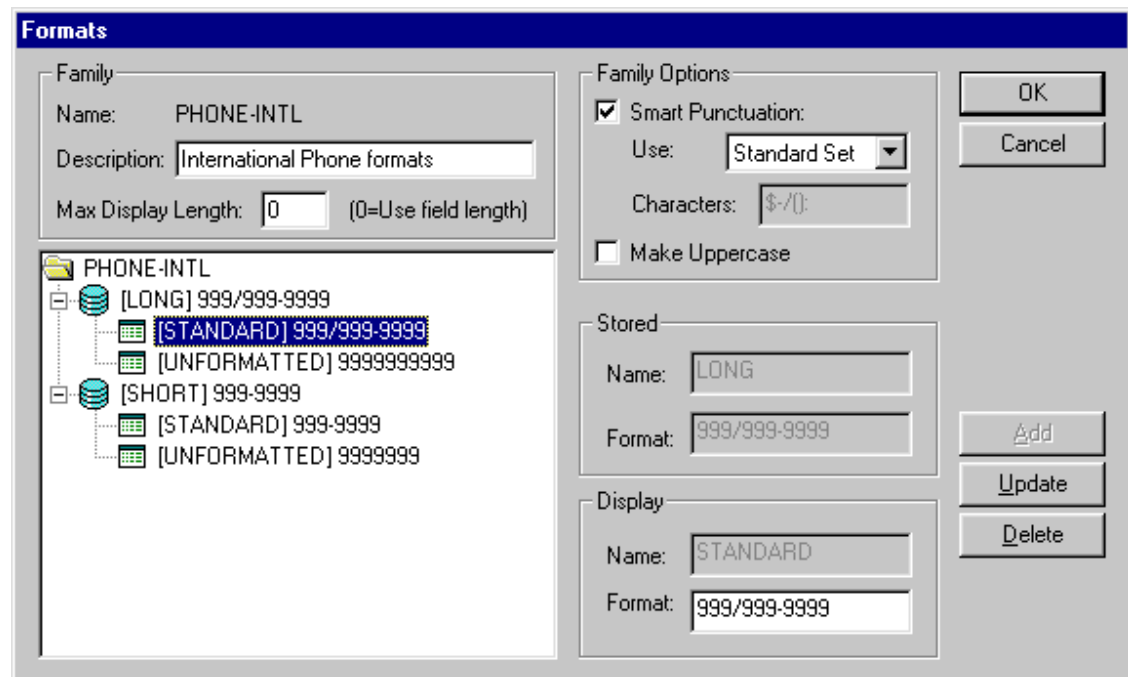

Both the LONG and the SHORT stored formats have two display formats: STANDARD and UNFORMATTED.

Using this property, you could select either of the display formats. For example:

```
If %Component = PAGE.INTERNATIONAL
    &CHAR.DisplayFormat = "STANDARD";
Else
```

```
&CHAR.DisplayFormat = "UNFORMATTED";  
End-If;
```

① Note

You *cannot* change the Stored format, but you can find its value using the StoredFormat property.

Example

```
&CHARACTER.DisplayFormat = "STANDARD";  
  
/* this assumes that &CHARACTER is a custom formatted field,  
and a display format option is STANDARD */
```

Related Topics

- [StoredFormat property: Field class](#)

DisplayOnly property: Field class

Description

Use this property to set or return a boolean value indicating whether this field is display only—that is, whether it is non-editable. This property corresponds to the Display Only setting on the Use tab of the page field property dialog box in the Application Designer.

This property is read/write.

Related Topics

- [JavaScriptEvents property: Field class](#)

DisplayZero property: Field class

Description

Use this property to specify if, in a numeric field, zeros or blank are displayed on a page.

This property *overwrites* the **Display Zero** value on the page field properties dialog box in Application Designer.

This property takes a Boolean value: true, display zeros, false, display blank. The default values is false.

The value of the DisplayZero property can be changed by the SmartZero property.

If SmartZero is set to true, and your application sets DisplayZero to false in a PeopleCode program, the application server changes the value of DisplayZero to true to display zeros, not blanks. When this occurs, the DisplayZeroChanged property is set to true.

This property is read/write.

Related Topics

- [DisplayZeroChanged property: Field class](#)
- [SmartZero property: Field class](#)
- Application Designer Developer's Guide: Specifying Attributes for a New Field Definition

DisplayZeroChanged property: Field class

Description

Use this property to determine if the original DisplayZero property has been changed from its original setting.

The DisplayZeroChanged property is only relevant when the SmartZero property has been set to true. When SmartZero equals true, the application server adjusts the DisplayZero property to display a blank or zero based on the user's input. You can then check the DisplayZeroChanged property to find out if the application server has changed the DisplayZero property.

This property takes a Boolean value: true, the application server has changed the field's DisplayZero property, false otherwise.

For example, suppose you have a PeopleCode program in the RowInit event that sets the DisplayZero property for a field to True, and also sets the SmartZero property to True. When a user deletes the numeric zero in that field on the page, and the page is submitted to the application server, the application server sets the field's DisplayZero property to False so that the new page displays a blank, not a numeric zero. The DisplayZeroChanged property is set to true in this example.

This property is read-only.

Related Topics

- [DisplayZero property: Field class](#)
- [SmartZero property: Field class](#)

Draggable property: Field class

Description

Use this property to set or return a Boolean value indicating whether the Draggable property for the group box field has been enabled (on the Fluid tab), which allows content to be dragged from this group box.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

```
&field1.Draggable = True;
```

Related Topics

- Fluid User Interface Developer's Guide: Setting Group Box Properties

Droppable property: Field class

Description

Use this property to set or return a Boolean value indicating whether the Droppable property for the group box field has been enabled (on the Fluid tab), which allows content to be dropped into this group box.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

```
&field2.Droppable = True;
```

Related Topics

- Fluid User Interface Developer's Guide: Setting Group Box Properties

EditError property: Field class

Description

This property is True if an error for this field has been found after executing the ExecuteEdits method with either a message object or a record object. This property can be used with the MessageSetNumber and MessageNumber properties to find the error message set number and error message number.

The EditError property returns True if a Null value was encountered for this field.

This property is read/write. After you have fixed the errors, you must set this property to False before running ExecuteEdits again.

Example

The following is an example showing how EditError, along with the ExecuteEdits method could be used:

```
&REC.ExecuteEdits();  
If &REC.IsEditError Then  
  For &I = 1 to &REC.FieldCount  
    If &REC.GetField(&I).EditError Then  
      LOG_ERROR(); /* application specific pgm */  
    End-If;  
  End-For;  
End-If;
```


Related Topics

- [ExecuteEdits method: Record class](#)
- [ExecuteEdits method: Message class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

Enabled property: Field class

Description

This property is True if this field is enabled. May be set False to disable any control that displays this field.

This property is read/write.

Example

```
&CHARACTER.Enabled = True;
```

```
&CHARACTER.Enabled = False;
```

ErrorDisplay property: Field class

Description

Use the ErrorDisplay property to display fields in error so that the fields in error are visually correct and accessible. You also use the property to reset the error display.

Example

In the following code, Field1 and Field2 are in error based on the value of SHOW_ERROR:

```
Local field &Field1, &Field2;  
&Field = GetField();  
If SHOW_ERROR = "Y" Then  
    &Field1.ErrorDisplay = True;  
    &Field2.ErrorDisplay = True;  
Else  
    &Field1.ErrorDisplay = False;  
    &Field2.ErrorDisplay = False;  
End-If;
```

FieldLength property: Field class

Description

This property returns the length of the field as a number.

This property is read-only.

Example

```
&MyRec = CreateRecord(Record.BKREC1);  
&MyField = &MyRec.GetField(Field.BKNAME);  
&length = &MyField.FieldLength;  
MessageBox(0, "Field Length", 0, 0, "The field BKREC1.BKNAME is length " |⇒  
    &length);
```

FindDisplay property: Field class

Description

Use this property to set or return a boolean value indicating whether this field is found as a result of a search.

This property is set at the Rowset level, so it is not persisted to the database. It has a value as long as the underlying Rowset is in context.

Only one field in the Rowset should ever have the FindDisplay property set. When the FindDisplay property is set, PeopleTools removes the FindDisplay property from any other field in any Rowset on the page. Additionally, ensure that the FindDisplay property is cleared when it's no longer needed.

When the FindDisplay property is set to True:

- If the field is display only, a focus style is added to the field and the focus is moved to the field.
- If the field is editable, the focus is set on the field.
- If the field is not visible, then the focus cannot be set on the field, so application developers must ensure that the field is visible before setting the FindDisplay property to true.

When the FindDisplay property is set to False, the focus style is removed from the field if it is present, and the page is refreshed.

This property is read/write.

Example

```
Local Rowset &rs = GetRowset(Scroll.PS_FLUID_SA);  
Local Field FieldObject = &rs.Find("String to Find");  
if All(FieldObject) then;  
    FieldObject.FindDisplay = true;  
  
else  
    MessageBox("String not found");  
end-if;
```

Related Topics

- [Find method: Rowset class](#)

ForceUpdateOnce property: Field class

Description

Use the ForceUpdateOnce property to set or return a boolean value indicating whether to force whether the HTML area is included in the AJAX response. When ForceUpdateOnce is set to True, the HTML area is included in the AJAX response one time only, except when some other properties of the HTML area have been changed, such as its content, label, and so on. When ForceUpdateOnce is set to False, the HTML area is always included in the AJAX response. This property overrides the Respond Once Only check box set in Application Designer and is valid for HTML areas at any level (from level 0 to level 3).

Note

This property is valid only for a page field defined as an HTML area.

This property is read/write.

Example

```
&HTML_fld = GetPageField(Page.TEST_PAGE1, "HTML_AREA1");  
&HTML_fld.ForceUpdateOnce = True;
```

Related Topics

- Application Designer Developer's Guide: Using HTML Areas

FormatLength property: Field class

Description

This property returns the length of the format for the field as a number.

This property is read-only.

Example

```
&field = GetField(Field.BKTEST);  
&formatlength = &field.FormatLength;  
&length = &field.FieldLength;  
&mymsg = "Field.BKTEST length is " | &length | " and format length is " | =>  
    &formatlength;  
MessageBox(0, "MetaData Fn Status", 0, 0, &mymsg);
```

FormattedValue property: Field class

Description

This property returns the value of a field as a string, formatted exactly as it would be displayed on an edit field on a page. This is useful when you're using a prompt field for the label of another field.

Because a record field can be bound to more than one page field, `FormattedValue` takes the first associated page field, looking first on the current page, then through all the pages in the component. This property returns a null string ("") if used with an `Image` or `ContentReference` field. It also returns a null string if no associated page field is found.

This property is read/write.

Example

This property could be used to set up a hyperlink labeled by data generated on a page. To do this, do the following:

1. Define a work field.
2. Associate the work field with the hyperlink page field.
3. Define a hidden page field with the formatting that you want.
4. Associate the hidden page field with the data field.
5. Write PeopleCode (probably for `RowInit`) to set the label on the work field to be the `FormattedValue` of the data field.

For example, suppose you wanted a hyperlink labeled by the `QE_POSITION_ID` field on the `QE_PLYR_POSITN` record. This field is a prompt table field, edited by table `QE_POSITION`.

You want to display the `DESCRSHORT` field from the prompt table, instead of the `QE_POSITION_ID` code value. Create a work field, `POS_LINK` on the `WORK_REC` record, and create a hyperlink page field associated with the `DESCRSHORT` field. For the label, create an invisible drop-down list page field, associated with `QE_PLYR_POSITN.QE_POSITION_ID`. Set its Prompt Table Field to `DESCRSHORT`. Then put a PeopleCode program on the component `RowInit` for either the `QE_PLYR_POSITN` record or the `WORK_REC`.

```
WORKREC.POS_LINK.Label = QE_PLYR_POSITN.QE_POSITION_ID.FormattedValue;
```

FreeFormStyleName property: Field class

Description

Use this property to set or return a `String` representing the free form style (or styles) for the field as previously set by `FreeFormStyleName` or modified by `AddFFStyle` or `ReplaceFFStyle`.

Note

Styles for this field set in Application Designer are not accessible through the `FreeFormStyleName` property.

This property is read/write.

Important

Use this property within fluid applications only.

Example

```
GetLevel0()(1).QE_WORK_REC1.OPTION_CD.FreeFormStyleName = "psc_border  
psc_margin-left05em";
```

Related Topics

- [AddFFClass method: Field class](#)
- [ReplaceFFClass method: Field class](#)

HoverText property: Field class

Description

Use this property to override the hover text for any push buttons or hyperlinks associated with the field. The maximum length of hover text is 100 characters. If the hover text is identical to the push button or hyperlink label, the hover text will not be shown.

Important

Even if the hover text has been set in Application Designer, this property returns a blank string if you use the property before you've explicitly set it in PeopleCode. This property overrides the existing value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

This property is read/write.

Example

```
QE_ABSENCE_HIST.QE_ABSENCE_TYPE.HoverText = MsgGetText(95, 5037, "Personalize⇒  
Layout");
```

Related Topics

- [Label property: Field class](#)

HtmlAttributes property: Field class

Description

Use this property to set or return a String representing HTML attributes on the field.

Warning

This is a free form field and does not check for any HTML or JavaScript errors.

This property is read/write.

Example

```
&sLabel = MsgGetText(280, 18, "Bulk Mode");  
PTS_SRCH.PTS_BULKMODE.HtmlAttributes = "title='" | &sLabel | "' alt='" |  
&sLabel | "'";
```

HtmlInputType property: Field class

Description

Use this property to set or return an Integer representing the HTML field type. The value can be one of the following constants or numeric values:

Numeric Value	Constant Value
0	%Input_Text
1	%Input_Color
2	%Input_Date
3	%Input_DateTime
4	%Input_DateTime_Local
5	%Input_Email
7	%Input_Number
8	%Input_Range
9	%Input_Search
10	%Input_Tel
11	%Input_Time
12	%Input_URL

This property is read/write.

Important

Use this property within fluid applications only.

Example

```
GetLevel0()(1).QE_WORK_REC1.OPTION_CD.HtmlInputType = %Input_Date;
```

IsAltKey property: Field class

Description

This property is True if this field references a field definition that is defined as an Alternate Search key in the associated record definition.

This property is read-only.

IsAuditFieldAdd property: Field class

Description

This property is True if this field references a field definition that is defined as an audit field in the associated record definition, and the field is audited whenever new data is added.

This property is read-only.

IsAuditFieldChg property: Field class

Description

This property is True if this field references a field definition that is defined as an audit field in the associated record definition, and the field is audited whenever data is changed.

This property is read-only.

IsAuditFieldDel property: Field class

Description

This property is True if this field references a field definition that is defined as an audit field in the associated record definition, and the field is audited whenever data is deleted.

This property is read-only.

IsAutoUpdate property: Field class

Description

This property is True if this field references a field definition that is defined as an Auto-Update field in the associated record definition.

This property is read-only.

IsChanged property: Field class

Description

This property returns True if the value for the field has been changed.

Note

Use this property with the primary database record only. It will not return valid results if used with a work record.

This property is read-only.

Example

```
If &CHARACTER.IsChanged Then

    Warning ("The character field has been changed");

End-If;
```

IsDateRangeEdit property: Field class

Description

This property is True if this field references a field definition that is defined as requiring a Reasonable Date in the associated record definition.

This property is read-only.

IsDescKey property: Field class

Description

This property is True if this field references a field definition that is defined as a descending key in the associated record definition.

This property is read-only.

IsDuplKey property: Field class

Description

This property is True if this field references a field definition that is defined as a duplicate key in the associated record definition.

This property is read-only.

IsEditTable property: Field class

Description

This property is True if this field references a field definition that has a table edit type of a Prompt Table with Edit.

This property is read-only.

IsEditXlat property: Field class

Description

This property is True if this field references a field definition that has a table edit type of a Translate Table Edit.

This property is read-only.

IsFromSearchField property: Field class

Description

This property is True if this field references a field definition that is defined as a From Search Field in the associated record definition.

This property is read-only.

IsGroupletAsLink property: Field class

Description

Use the IsGroupletAsLink property to set or return a boolean value indicating whether the ARIA (Accessible Rich Internet Applications) role for this group box is as a link. The default ARIA role for a group box is as a button.

This property is read/write.

Example

```
/* Set role as link instead of button */  
&rec.GROUPBOX.IsGroupletAsLink = True;
```

Related Topics

- [AriaAttributes property: Field class](#)

IsHyperlink property: Field class

Description

Use this property to set or return a Boolean value indicating whether the field is a hyperlink.

This property is read/write.

Important

Use this property within fluid applications only.

Example

```
GetLevel0()(1).QE_WORK_REC1.OPTION_CD.isHyperLink = True;
```

IsInBuf property: Field class

Description

This property returns True if the data of the field is present in the data buffers. For example, all of the fields of a derived record are not present in the data buffer.

This property is read-only.

Example

The following example iterates over all the fields in a record. The code verifies that the data for the field is accessible before it tries to assign the value to a variable.

```
For &I = 1 to &REC.FieldCount
    &FIELD = &REC.GetField(&I);
    If &FIELD.IsInBuf Then
        &VALUE = &FIELD.Value;
        /* do other processing */
    End-If;
End-For;
```

Related Topics

- PeopleCode Developer's Guide: Record Fields and the Component Buffer

IsKey property: Field class

Description

This property is True if this field references a field definition that is defined as a primary key of the associated record definition.

This property is read-only.

Example

```
If &CHARACTER.IsKey Then

    Warning ("The field " | &Character.Name | " is a key");

End-If;
```

IsListItem property: Field class

Description

This property is True if this field references a field definition that is defined as a List Box item of the associated record definition.

This property is read-only.

IsNotUsed property: Field class

Description

This property is True if this field has been set as NotUsed with the SetDBFieldNotUsed function.

This property is read-only.

Example

```
&field = GetField(Field.RC_TEST_PB);  
&ret = &field.IsNotUsed;  
If (&ret = True) Then  
    MessageBox(0, "MetaData Fn Status", 0, 0, "Field is NOTUSED");  
Else  
    MessageBox(0, "MetaData Fn Status", 0, 0, "Field is used.");  
End-If;
```

IsRequired property: Field class

Description

This property is True if this field references a field definition that is defined as Required in the associated record definition.

This property is read-only.

IsRichTextEnabled property: Field class

Description

This property is True if this field is a long edit box with the rich text editor enabled.

This property is read-only.

IsSearchItem property: Field class

Description

This property is True if this field references a field definition that is defined as a Search key in the associated record definition.

This property is read-only.

IsSystem property: Field class

Description

This property is True if this field references a field definition that is defined as System Maintained field in the associated record definition.

This property is read-only.

IsThroughSearchField property: Field class

Description

This property is True if this field references a field definition that is defined as a Through Search Field in the associated record definition.

This property is read-only.

IsUseDefaultLabel property: Field class

Description

This property is True if this field references a field definition that has its label defined as Use Default Label in the associated record definition.

This property is read-only.

IsYesNo property: Field class

Description

This property is True if this field references a field definition that has a table edit type of a Yes/No Table Edit.

This property is read-only.

JavaScriptEvents property: Field class

Description

Use this property to set or return a string representing JavaScript code to be executed for this field.

Warning

This is a free form field and no validation is performed to check for any JavaScript errors.

When a field has JavaScriptEvents set in PeopleCode, its DisplayOnly setting will be overridden to False only if the field is displayed in a non-interactive grouplet. If the field is displayed in an interactive grouplet or defined on a fluid page displayed as part of a fluid component, its DisplayOnly setting will not be overridden.

This property is read/write.

Important

Use this property within fluid applications only.

Example

```
PTS_SRCH.PTS_CANCEL.JavaScriptEvents =  
"onclick='javascript:DoSearchCancel();' href='javascript:void(0);'";
```

Label property: Field class

Description

Use this property to override the label text for the field when it's displayed on a page.

Important

Even if the label text has been set in Application Designer, this property returns a blank string if you use the property before you've explicitly set it in PeopleCode. This property overrides the existing value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

To set the label in PeopleCode, use this property or the `SetLabel` built-in function. To return the text of a label before you set it, use the `GetShortLabel` or `GetLongLabel` methods.

Note

You can't use this property to set labels longer than 100 characters. If you try to set a label of more than 100 characters, the label is truncated to 100 characters.

The "tool tip," or mouse over text, that appears with a hyperlink at runtime comes from the RFT long label assigned to the record field. However, the RFT long label displays only if it is different from the assigned display value of the hyperlink and it is not null. If the link is an image button, the tool tip is derived from the label text if there is any. Otherwise, the RFT long label is used.

This property is read/write.

Example

The following code sample changes all the field labels for a record to the short label. It assumes that there is a label with the same name as the name of the field for all fields in the record.

```
Local Field &FLD;  
Local Record &REC;  
  
If CHECK_FIELD Then  
    &REC = GetRecord();  
    For &I = 1 to &REC.FieldCount  
        &FLD = &REC.GetField(&I);  
        &LABELID = &FLD.Name;  
        &FLD.Label = &FLD.GetShortLabel(&LABELID);  
    End-For;  
End-If;
```

Related Topics

- [GetShortLabel method: Field class](#)

- [GetLongLabel method: Field class](#)

LabelImage property: Field class

Description

Use this property to override the image for a button. This property is only valid for button controls. This property can be set even when the button is disabled or display-only.

! Important

Even if the image has been set in Application Designer, this property returns a blank string if you use the property before you've explicitly set it in PeopleCode. This property overrides the existing value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

The value for this property can be either of the following:

`Image.imagename`

or

`"Imagename"`

Oracle strongly recommends that if the PeopleCode program sets the LabelImage for an active button, it also sets the image appropriately if the button is disabled.

This property is read/write.

Example

```
Local Field &MyField;  
  
&MyField = GetField(BUTTON_BOTTOM);  
&MyField.LabelImage = Image.BTN_REFRESH;
```

LabelStyle property: Field class

Description

Use the LabelStyle property to set the style of a label associated with edit boxes, check boxes, drop-down lists, and radio buttons using the style class specified in a custom style sheet attached to a page.

This property is read/write.

! Important

Use this property within classic applications only.

Example

In this code snippet, the style classes — MY_LABELSTYLE1 and MY_LABELSTYLE2 — are sample style classes. You must ensure that your style classes are included in the custom style sheet.

```
Local Field &field;  
&field = GetField();  
If MYFIELD = 1 Then;  
    &field.LabelStyle = "MY_LABELSTYLE1";  
End-If;  
If MYFIELD = 2 Then;  
    &field.LabelStyle = "MY_LABELSTYLE2";  
End-If;
```

Related Topics

- Application Designer Developer's Guide: Overriding the Default Page Field Styles

LongTranslateValue property: Field class

Description

This property returns a string that contains the Long translate (XLAT) value of the field if the field is based on a translate table.

If the field has a null value, a null string is returned. If the field isn't based on a translate table, or the value isn't in the translate table, the field's current value is returned. Because the current value can be of any type, this property has a type of Any.

i Note

If you're accessing a field based on the Translate table, the Value property returns only the one or two letter XLAT value.

Use the ShortTranslateValue property to return the short translate value of a field.

This property is read-only.

Example

```
Local Any &VALUE;  
Local Field &MYFIELD;  
  
&MYFIELD = GetField();  
&VALUE = &MYFIELD.LongTranslateValue;  
If ALL(&VALUE) Then
```

```
/* do processing */  
End-if;
```

Related Topics

- [Value property: Field class](#)
- [ShortTranslateValue property: Field class](#)

MessageNumber property: Field class

Description

This property returns the error message number (as a number) if an error for this field is found after executing `ExecuteEdits` method. You can use this property in conjunction with the `EditError` property (which can be used to determine whether there are any errors) and the `MessageSetNumber` property (which contains the error message set number if an error is found.)

This property is read-only.

Example

```
For &I = 1 to &RECORD.FieldCount  
    &MYFIELD = &RECORD.GetField(&I);  
    If &MYFIELD.EditError Then  
        &MSGNUM = &MYFIELD.MessageNumber;  
        &MSGSET = &MYFIELD.MessageSetNumber;  
        /* Do processing */  
    End-If;  
End-For;
```

MessageSetNumber property: Field class

Description

This property returns the error message set number (as a number) if an error for this field is found after executing `ExecuteEdits` method. You can use this property in conjunction with the `EditError` property (which can be used to determine whether there are any errors) and the `MessageNumber` property (which contains the error message number if an error is found.)

This property is read-only.

Example

```
For &I = 1 to &RECORD.FieldCount  
    &MYFIELD = &RECORD.GetField(&I);  
    If &MYFIELD.EditError Then  
        &MSGNUM = &MYFIELD.MessageNumber;  
        &MSGSET = &MYFIELD.MessageSetNumber;  
        /* Do processing */  
    End-If;  
End-For;
```


MouseOverMsgNum property: Field class

Description

Use this property to override the message number for a message catalog mouse over popup page. Together with the MouseOverMsgSet property, this property uniquely identifies a Message Catalog entry to be used as the mouse over popup page.

The Message Text field from that Message Catalog entry becomes the title of the mouse over popup page; the Explanation field becomes the body of the mouse over popup page.

! Important

For this property to have an effect, the page field definition must first be set as a message catalog mouse over popup in Application Designer. This property overrides the existing message number value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

This property is read/write.

Example

For example, the following code could be added to the page Activate event to override the message set and number defined in Application Designer for the popup page associated with the DEBUG_PEOPLECD.DEBUG_CODE field.

```
GetField(DEBUG_PEOPLECD.DEBUG_CODE).MouseOverMsgSet = 2;  
GetField(DEBUG_PEOPLECD.DEBUG_CODE).MouseOverMsgNum = 13;
```

Related Topics

- [MouseOverMsgSet property: Field class](#)
- Application Designer Developer's Guide: Enabling Message Catalog Entries as Pop-up Pages

MouseOverMsgSet property: Field class

Description

Use this property to override the message set number for a message catalog mouse over popup page. Together with the MouseOverMsgNum field property, this property uniquely identifies a Message Catalog entry to be used as the mouse over popup page.

! Important

For this property to have an effect, the page field definition must first be set as a message catalog mouse over popup in Application Designer. This property overrides the existing message set value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

This property is read/write.

Related Topics

- [MouseOverMsgNum property: Field class](#)

Name property: Field class

Description

This property returns the name of the field definition that the field object is based on as a string value.

This property is read-only.

Example

```
WinMessage("The character field's name is : " | &CHARACTER.Name);
```

OriginalValue property: Field class

Description

This property returns the value of a field, that is, the value that from the database. If the value hasn't been changed and saved by the user, it is the original value from the database. If the value has been changed and saved by the user, it is the existing value in the database.

① Note

This property does *not* work for derived records. Original values are the database values, and derived records do not have a corresponding database value.

This property is read-only.

Example

```
&Orig = &MyField.OriginalValue;  
If &Orig = &Date Then  
    /* do current day processing */  
Else  
    /* do other processing */  
End-If;
```

OverridePromptTableName property: Field class

Description

Use this property to override the prompt table name at runtime. You should provide a valid record name as a string value and this record name is used to override the prompt table name at runtime; it does not update the persisted value in the database.

Note

The OverridePromptTableName property is ignored if you invoke it to override a dynamic view set at record field property level.

Note

The OverridePromptTableName property does not override the SQL that is set using the SqlText property.

This property is read/write.

Example

```
Local Field &field;  
&field = GetField();  
/* Use a branch statement checking for PeopleTools release, which should be  
greater than 8.62. */  
#If #ToolsRel >= "8.62" #Then  
    &field.OverridePromptTableName = "VENDOR_SHRT_DV2";  
End-If;
```

ParentRecord property: Field class

Description

This property returns a reference to the record object for the record containing the field.

This property is read-only.

Example

```
&NUMBER_OF_FIELDS = &CHARACTER.ParentRecord.Fieldcount;  
  
/* note that FieldCount is a property of the Record class */
```

PlaceholderText property: Field class

Description

Use this property to set or return a String representing the placeholder text for the field.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

```
DERIVEDNUI_SRCH.NUI_SEARCH.PlaceholderText = "Search ";
```

PromptTableName property: Field class

Description

This property returns the name of the prompt table (if any) associated with this field. This property returns a string value. This property returns Null if no prompt table is associated with the field.

This property is read-only.

SearchDefault property: Field class

Description

If this property is set to True, system defaults (the default values set in the record field definitions) are enabled on search dialogs for the field. Setting this property to True *does not* cause the FieldDefault event to fire.

The system default is done only once, when the search dialog first starts, immediately after any SearchInit PeopleCode. If the user subsequently blanks out a field, the field isn't reset to the default value. Setting SearchDefault to False disables default processing for the field executing the property.

SearchDefault is effective only when used in SearchInit PeopleCode programs.

This property is read/write.

Example

```
&CHARACTER.SearchDefault = True;
```

```
/* assuming &CHARACTER is a search key, and has a default value */
```

This example turns on edits and system defaults for the SETID field in the search dialog box:

```
&SETID = GetField(INV_ITEMS.SETID);  
&SETID.SeachDefault = True;  
&SETID.SearchEdit = True;
```

SearchEdit property: Field class

Description

If this property is set to True, SearchEdit enables system edits (edits specified in the record field definition) for the field, for the life of the search dialog box. Setting SearchEdit to False disables system edits. In the Add mode search dialog box, the following edits are performed when the end-user clicks the Add button. In any other mode, the following edits are performed when the end-user clicks the Search button:

- Formatting
- Required Field
- Yes/No Table
- 1/0 Table
- Translate Table
- Prompt Table

SearchEdit does not cause the FieldEdit, FieldChange, or SaveEdit PeopleCode events to fire during the search dialog.

You might use SearchEdit to control access to the system. For example, you can apply this function to the SETID field of a dialog box and require the user to enter a valid SETID before they are able to click OK on the search dialog box.

This property is read/write.

Example

```
&CHARACTER.SearchEdit = True;
```

```
/* assuming &CHARACTER is a search key, and contains an edit table  
such as translate table defined in its field properties. */
```

This example turns on edits and system defaults for the SETID field in the search dialog box:

```
&SETID = GetField(INV_ITEMS.SETID);  
&SETID.SeachDefault = True;  
&SETID.SearchEdit = True;
```

Considerations Using SearchEdit

If you use this method in the SearchInit event, the search page options are limited to the "=" and "IN" operators.

SetComponentChanged property: Field class

Description

This property determines whether a change to a field (using PeopleCode) marks the component as changed and the data written to the database if the field is a database field.

This property takes a Boolean value: true, changes to the field mark the component as changed, false, the component is treated as if unchanged. The default value is true for database fields and false for derived fields.

The **Set Component Changed** check box for a page field in Application Designer determines if a user's action on a page marks the component as changed. For example, if **Set Component Changed** for an edit box control is cleared in Application Designer, then user's editing on the edit box does not mark the component as changed and no save warning message is displayed if the user leaves the page without saving. The SetComponentChanged property for a field determines if a change on the field value using PeopleCode marks the component as changed and a save warning is issued when the user tries to exit the page without saving.

This property is only applicable after the Page Activate event has run. If you try to use this property before or during Page Activate, the user does not receive a warning if data has been changed.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Use Properties
- [SetComponentChanged property: Rowset class](#)

ShortTranslateValue property: Field class

Description

This property returns a string that contains the Short translate (XLAT) value of the field if the field is based on a translate table.

If the field has a null value, a null string is returned. If the field isn't based on a translate table, or the value isn't in the translate table, the field's current value is returned. Because the current value can be of any type, this property has a type of Any.

Note

If you're accessing a field based on the translate table, the Value property returns only the one or two letter XLAT value.

Use the LongTranslateValue property to return the long translate value of a field.

This property is read-only.

Example

```
Local Any &VALUE;  
Local Field &MYFIELD;  
  
&MYFIELD = GetField();  
&VALUE = &MYFIELD.ShortTranslateValue;  
If ALL(&VALUE) Then  
    /* do processing */  
End-if;
```

Related Topics

- [Value property: Field class](#)
- [LongTranslateValue property: Field class](#)

ShowRequiredFieldCue property: Field class

Description

With PeopleTools 8, an asterisk (*) is displayed on pages beside fields that are defined as Required in Application Designer. You can use this property to specify whether this asterisk, also called the *required field cue*, is displayed for a particular field.

For example, many fields are made required or non-required either procedurally or through PeopleCode. This means they aren't defined as Required in Application Designer, and the end-user may be confused. For these fields, you can use this property.

Note

This property affects only fields where a required field cue is otherwise permissible. That is, regardless of the setting of the property, no cue is ever shown on a push button, a display-only field, and so on.

This property is read/write.

SmartZero property: Field class

Description

Use this property to specify if FieldChange PeopleCode programs are run when a user changes a zero to a blank, or a blank to a zero, for a field on a page.

This property takes a Boolean value: true, run FieldChange PeopleCode programs, false, do not. The default value is false.

When you set this property to true, in addition to treating a user change of blank-to-zero and zero-to-blank as a field change, the application server also adjusts the DisplayZero property for the runtime field object to display a blank or zero as entered by the user.

This property is read/write.

Related Topics

- [DisplayZero property: Field class](#)
- [DisplayZeroChanged property: Field class](#)

SqlText property: Field class

Description

This property is valid only for fields that have a dynamic view as their prompt record. If you set SqlText to a non-null value, that text is used instead of the dynamic view's normal text used for prompting.

! Important

Even if the SQL text has been set in Application Designer, this property returns a blank string if you use the property before you've explicitly set it in PeopleCode. This property overrides the existing value only. When a user navigates away from the component, and then back to the page again, the original value is used until it's changed again through PeopleCode.

Suppose you wanted to have a different prompt table depending on the settings of other fields in the row. Normally you could use %EDITTABLE to dynamically specify the prompt table you want. However in this case there are too many possible combinations of values, which would require too many views. Furthermore, the values are customizable by the end-user or the application, which means even if you, the developer, wanted to, you couldn't provide all the combinations of views necessary. However you can generate the desired SQL text for the view in PeopleCode based on what the user enters.

If you use a dynamic view as the prompt table, and have the dynamic view contain a SQL object that is updated from PeopleCode, you could achieve this functionality. However, a SQL object is a shared object, so if multiple users used the same page, they overwrite each other's settings and the SQL object contains the SQL for the most recent user. Similarly if a single user had multiple rows on a page, the SQL object is valid only for the most recent row. This means if the user went to another row and did a prompt, they would get the wrong values again.

The purpose of this property is to enable you to specify the generated SQL text independently for each occurrence in each transaction. It enables you to override the text of a dynamic view being used as a prompt table on a field by field basis.

It is up to the developer to verify that the text specified for this property is valid, that is, that it selects the correct number of fields for the record definition, and so on.

This property is read/write.

StoredFormat property: Field class

Description

This property returns the custom character format (as a string) for the field executing the property.

If the field doesn't have a custom format associated with it, the user receives a runtime error message.

If the field has a display format associated with it, you can change that using the DisplayFormat property.

This property is read-only.

Example

```
WinMessage("The character field's custom stored format is : " |
&CHARACTER.Stored⇒
Format);

/* this assumes that &CHARACTER is a custom formatted */
/* field */
```

Related Topics

- [DisplayFormat property: Field class](#)

Style property: Field class

Description

Use the Style property to override the style class specified in Application Designer (on the Record tab of the page field properties) as a string value. The override style class can be a PeopleTools built-in style class or from a custom style sheet attached to the page.

Note

While this property is read/write, you cannot use this property to return the value specified in Application Designer; this property returns a blank string unless it has been explicitly set in PeopleCode.

While this property overrides the style class specified in Application Designer, these system conditions will override the style class specified by this property:

- If the field has an error, the field will be rendered using the PSERROR style class.
- If the user has enabled multi-language entry and the field is language sensitive, the field will be rendered using the PSMULTILANG style class.

This property is read/write.

Example

```
Local Field &field;

&field = GetField();

If &field.Value = 1 Then;
    &field.Style = "MY_STYLE1";
End-If;

If &field.Value = 2 Then;
```

```
&field.Style = "MY_STYLE2";  
End-If;
```

Related Topics

- Application Designer Developer's Guide: Style Classes
- Application Designer Developer's Guide: Setting Record Properties
- Application Designer Developer's Guide: Overriding the Default Page Field Styles

Type property: Field class

Description

This property returns the type of field. The values can be one of the following strings:

- CHAR
- DATE
- DATETIME
- IMAGE (for static images)
- IMAGEREFERENCE
- LONGCHAR
- NUMBER
- SIGNEDNUMBER
- TIME

Note

Fields of type Attachment have a type of IMAGE.

This property is read-only.

Example

```
If &CHARACTER.Type = "NUMBER" Then  
    /* perform processing */  
Else  
    /* error processing */  
End-If;
```

Value property: Field class

Description

This property contains the current value of the field, converted to an appropriate PeopleCode data type.

In most contexts, the Value property can be used to assign a new value to the field. However, there are some restrictions:

- You cannot assign the Value property in any RowSelect PeopleCode program.
- You cannot assign the current record field value to the Value property in any FieldEdit PeopleCode program.

Note

If you're accessing a field based on the translate table, Value returns only the one letter XLAT value. To get the full XLAT value, use the LongTranslateValue or ShortTranslateValue properties.

This property is read/write.

Example

```
&CHARACTER.Value = "Hello";
```

Considerations Using INSTALLATION or OPTIONS Tables

When using the INSTALLATION or OPTIONS table, you cannot use the Value property. You must use the old style format, not the field object format. For example, the following code is invalid:

```
If %Page = Page.GP_RUN_TYPE And  
    INSTALLATION.TL.Value = "N" Then  
    &RS2.HideAllRows();
```

While the following code is valid:

```
If %Page = Page.GP_RUN_TYPE And  
    INSTALLATION.TL = "N" Then  
    &RS2.HideAllRows();
```

Considerations Using Character Values

Previously, if you had an edit-box field, and if the end-user selected the value in it and deleted the value, leaving the field empty, the value of the field in PeopleCode was not an empty (zero-length) string.

Now, the value of such a field *is* an empty (zero-length) string.

In addition, if the user adds one or more space characters to a field, the field still returns a Null string.

The following is how to check for this:

```
If (fieldname.Value = "") Then
```

Related Topics

- [LongTranslateValue property: Field class](#)
- [ShortTranslateValue property: Field class](#)

Visible property: Field class

Description

This property is True if this field is visible in the page displaying it. Setting this property to False hides the field. Because every field is implicitly associated with a rowset, row, and record, setting the Visible property for a field on the first page of a component hides only that field. If that field is repeated on other pages in the component, the other occurrences of the field aren't hidden.

This property is read/write.

Example

The following code hides the field &ROUND_OPTION based on the value of AVG_DFLT_OPTION:

```
Local field &ROUND_OPTION;  
  
&ROUND_OPTION = GetField();  
  
If AVG_DFLT_OPTION = "Y" Then  
    &ROUND_OPTION.SetDefault();  
    &ROUND_OPTION.Visible = True;  
Else  
    &ROUND_OPTION.Visible = False;  
End-If;
```

File Class

Understanding File Layout

PeopleTools supports reading and writing to plain text files, and to files that have a format based on a File Layout definition that has been created in Application Designer.

- If the file is a plain text file, data is read or written using text strings.
- If the file is based on a File Layout, you can use text strings, rowset, or record objects.

This simplifies reading, writing, and manipulating hierarchical transaction data with PeopleCode.

File layout methods and properties are noted as such in their descriptions.

Related Topics

- [Plain Text Files](#)
To read and write from plain text files involves reading and writing strings of data. These text strings can be manipulated with built-in string functions, like RTrim, Find, Replace, and so on.
- [File Layout Examples](#)
If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, you want to use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)
- Application Designer Developer's Guide: Understanding File Layouts

Data Type of a File Object

The File Object is an instance of the File class. A file object is declared using the File data type. For example,

```
Local File &MYFILE;
```

This creates an object &MYFILE of the class File.

Scope of a File Object

A file object can only be instantiated from PeopleCode. This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

A file object is passed to and returned from PeopleCode functions and methods as a reference, so the file object is never copied; rather, alternate identifiers are used to refer to the same object. Any change made to a file using one identifier has the same effect as it would with any other identifier for that file.

In the following code example, two variables, &F1 and F2, are declared by using the data type File. The file is opened using the GetFile built-in function. Next, &F1 is assigned to &F2. This does *not* copy &F1 to &F2. Instead, &F1 and &F2 both refer to the same object. Therefore, in the last step when &F2 is closed, &F1 is closed too.

```
Local File &F1, &F2;

&F1 = GetFile("somefile.txt", "R", "UTF8");
If &F1.IsOpen Then
    &F2 = &F1;
    &F2.Close(); /* Now &F1 is also closed. */
End-if;
```

Related Topics

- PeopleCode Language Reference: GetFile function
- PeopleCode Developer's Guide: Assigning Objects

File Security Considerations

When you're using file objects in PeopleCode that might run on a server, you must be aware of some security concerns. The underlying system doesn't provide security checks on access to the files. Instead, the PeopleCode programs use whatever authority the server process has, and *not* that of the user. This means you must write your PeopleCode program to prevent the user from reading or writing files that they should not. In particular, be especially wary of opening files where any part of the filename is derived from user input.

File Access Interruption Recovery

You can use the GetPosition or SetPosition methods to minimize the loss of work in the event of a system failure during file access. To use them and recover from access interruptions, you must access the file in Update mode using the GetFile built-in function or the Open method, specifying the mode parameter "U". You need to use this mode in anticipation of possible interruptions if you want to recover from them later.

To start reading or writing from the beginning of a file, use SetPosition to set a read/write position of 0, immediately after you open the file in Update mode.



Warning

In Update mode, any write operation clears the file of all data that follows the position you set.

When reading from or writing to a file, use GetPosition periodically to determine your current byte position in the file. This establishes a checkpoint to which you can return after a failure. You must save the checkpoint value in a separate file or a database so you can retrieve it later. How often you save a checkpoint depends on your requirements: the less work you want to redo, the more frequent your checkpoints should be. You may also want to save information identifying the data you're reading or writing at the time.

After a failure interrupts your file access, reopen the file in Update mode. You can then retrieve the last checkpoint value you saved, and use SetPosition to apply that value. Your read/write

position in the file is the position of the last checkpoint, and you can continue reading or writing from there.

Use the Update mode with `GetPosition` and `SetPosition` only for recovering from interruptions as described here, or for starting at the beginning of the file again.

Note

For fixed-width file layouts, the field start positions and lengths are computed in 8-bit bytes, except in the case of UCS2 or UTF-16 where they are computed in 16-bit double-bytes. This may create complications when using variable width encoding (for example, UTF-8 or Shift-JIS), when the data is elsewhere calculated in characters (rather than bytes), because the data involved may contain characters of varying byte-width.

Related Topics

- [Open method: File class](#)
- [SetPosition method: File class](#)
- [GetPosition method: File class](#)
- PeopleCode Language Reference: `GetFile` function

Plain Text Files

To read and write from plain text files involves reading and writing strings of data. These text strings can be manipulated with built-in string functions, like `RTrim`, `Find`, `Replace`, and so on.

Note

If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)

The following example creates an array of array of string, then reads in two files, one into each "column" of the array. The Names file contains names; the Numbers file contains employee numbers. The `ReadLine` method reads each successive line in a file, until it reaches the end of the file.

Notice that the first file is opened using the `GetFile` function. The second file is not opened using `GetFile`, but rather with the `Open` method. After the data is read into the array, you can do processing on the data. The end of the program writes the changes back to the files, using the `WriteLine` method, which includes a system end of line character at the end of every line.

```
Local array of array of string &BOTH;  
Local File &MYFILE;  
Local string &HOLDER;  
  
/* Create empty &BOTH array */  
&BOTH = CreateArrayRept(CreateArrayRept("", 0), 0);
```

```

/* Read first file into first column */

&MYFILE = GetFile("names.txt", "R", "UTF8");
While &MYFILE.ReadLine(&HOLDER);
    &BOTH.Push(&HOLDER);
End-While;

/* read second file into second column */

&MYFILE.Open("numbers.txt", "R");
&LINENO = 1;
While &MYFILE.ReadLine(&HOLDER);
    If &LINENO > &BOTH.Len Then
        /* more number lines than names, use a null name */
        &BOTH.Push(CreateArray("", &HOLDER));
    Else
        &BOTH[&LINENO].Push(&HOLDER);
    End-If;
    &LINENO = &LINENO + 1;
End-While;

/* if more names than numbers, add null numbers */
For &LINENO = &LINENO to &BOTH.Len
    &BOTH[&LINENO].Push("");
End-For;
&MYFILE.Close();
/* do processing with array */
/* write data back to files */

&MYFILE1 = GetFile("names.txt", "A", "UTF8");
&MYFILE2 = GetFile("numbers.txt", "A", "UTF8");

/* loop through array and write to files */

For &I = 1 To &BOTH.Len
    &STRING1 = &BOTH[&I][1];
    &MYFILE1.writeline(&STRING1);
    &STRING2 = &BOTH[&I][2];
    &MYFILE2.writeline(&STRING2);
End-For;

&MYFILE1.Close();
&MYFILE2.Close();

```

Related Topics

- [File Layout Examples](#)

If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, you want to use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)

Automatic PeopleCode Generation

After you create a File Layout definition, you can use PeopleCode to access it. This PeopleCode can be long and complex. Rather than write it directly, you can drag and drop the

File Layout definition from Application Designer Project View into an open PeopleCode edit pane. This is primarily used for importing data. Application Designer analyzes the definition and generates initial PeopleCode as a template, which you can modify to meet your requirements.

The following is just a snippet of the code that is generated:

```
Function EditRecord(&REC As Record) Returns boolean ;
    Local integer &E;
    REM   &REC.ExecuteEdits(%Edit_Required + %Edit_DateRange + %Edit_YesNo +
    %Edit_⇒
    TranslateTable + %Edit_PromptTable + %Edit_OneZero);
    &REC.ExecuteEdits(%Edit_Required + %Edit_DateRange + %Edit_YesNo +
    %Edit_One⇒
    Zero);
    If &REC.IsEditError Then
        For &E = 1 To &REC.FieldCount
            &MYFIELD = &REC.GetField(&E);
            If &MYFIELD.EditError Then
                &MSGNUM = &MYFIELD.MessageNumber;
                &MSGSET = &MYFIELD.MessageSetNumber;
                &LOGFILE.WriteLine("****Record:" | &REC.Name | ", Field:" |⇒
                &MYFIELD.Name );
                &LOGFILE.WriteLine("*****" | MsgGet(&MSGSET, &MSGNUM, ""));
            End-If;
        End-For;
        Return False;
    Else
        Return True;
    End-If;
End-Function;
.
.
.
```

Related Topics

- Application Designer Developer's Guide: Understanding File Layouts

End Of Line Considerations

The file format of the input file should be appropriate to the operating system of the process reading the file (Windows format on Windows systems, UNIX format on UNIX systems).

Input files for file layouts of type fixed or CSV must not contain embedded CR/LF within the field data. However, input files for file layouts of type XML can contain embedded CR/LF within field data for a character type file field that is the associated with a long-character type database field that has unlimited length—that is, the maximum length specified as 0.

File Layout Error Processing

If an error occurs on any field in any record of a rowset object populated with the ReadRowset method, the rowset object's property IsEditError returns True. For example, you can use the method ExecuteEdits on a record, to verify that the data in the record is valid (has the correct format, the right data type, and so on.) This type of error is indicated by the IsEditError.

In some instances, however, the rowset object won't receive the error; in that case the file object's `IsError` property returns `True`. To discover all field errors, check both properties after executing `ReadRowset`.

To determine which field has the error, you must examine the `EditError` property of every field in the rowset to find the one returning `True`. You can then examine that field's `MessageSetNumber` and `MessageNumber` properties to determine the relevant error message. The following example shows how this might be done:

```
&MYFILE.Open(&SOMENAME, "R");
&MYFILE.SetFileLayout(FILELAYOUT.SOMELAYOUT);
&MYROWSET = &MYFILE.ReadRowset();
If &MYFILE.IsError Then
  For &I = 1 to &MYROWSET.ActiveRowCount
    If &MYROWSET.GetRow(&I).IsEditError Then
      &ROW = &MYROWSET.GetRow(&I);
      For &J = 1 to &ROW.RecordCount
        If &ROW.GetRecord(&J).IsEditError Then
          &REC = &ROW.GetRecord(&J);
          For &K = 1 to &REC.FieldCount
            If &REC.GetField(&K).EditError Then
              /* Examine the field's
                MessageSetNumber and MessageNumber properties,
                and respond accordingly */
            End-If;
          End-For;
        End-If;
      End-For;
    End-If;
  End-For;
End-If;

&MYFILE.Close();
```

Note

Only field errors set the `IsError`, `IsEditError`, or `EditError` properties. All other errors triggered by File class methods terminate the PeopleCode program.

Related Topics

- [IsError property: File class](#)
- [ReadRowset method: File class](#)
- [IgnoreInvalidId property: File class](#)
- [IsEditError property: Rowset class](#)
- [ExecuteEdits method: Record class](#)
- [ExecuteEdits method: Message class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

Working With Relative Paths

Relative paths apply to the following PeopleCode operations: the Open method of the File class and the CreateDirectory, FileExists, FindFiles, GetFile, GetTempFile, and RemoveDirectory built-in functions

If you specify a relative path, that path is appended to the path constructed from a system-chosen environment variable. Environment variables are checked in a particular order to find one that is set. This means if the first environment variable in order is found to be set, that's the one that is used. If the environment variable isn't found to be set, the next one is checked, and if found, is used, and so on.

If the PeopleCode operation is called from a program running in an environment started through psadmin (for example, within an application server domain), the PeopleCode operation checks in the following order to determine whether an environment variable is set:

1. *PS_FILEDIR*
2. *PS_SERVDIR*

If the PeopleCode operation is called from an environment *not* started through psadmin (for example, a stand-alone call to Application Engine), the PeopleCode operation checks in the following order to determine whether an environment variable is set:

1. *PS_FILEDIR*
2. *PS_SERVDIR*
3. *TEMP*

In both cases, the PeopleCode operation then uses the value of the first environment variable that is found to be set and appends the specified relative path to it in order to determine the resulting full path that will be used to locate the file. The resulting path is shown in the following table:

Environment Variable	Resulting Path
<i>PS_FILEDIR</i>	<i>PS_FILEDIR\relative_path</i>
<i>PS_SERVDIR</i>	<i>PS_SERVDIR\files\relative_path</i>
<i>TEMP</i>	<i>TEMP\relative_path</i>

If the PeopleCode operation is not successful at the specified location, it will return Null or False (as appropriate for the invoking operation) and it will *not* attempt to use the value of one of the other environment variables.

Note

In the preceding examples, the Windows directory separator, a backslash, was used. For UNIX directories, the directory separator is a forward slash.

Note

The PS_FILEDIR environment variable is *not* initialized and set to a path automatically. If you want to use this environment variable, you must set it yourself.

Note

Your system security should verify if a user has the correct permissions before allowing access to a drive. (For example, if a user changes their TEMP environment variable to a network drive they don't normally have access to, your system security should detect this.)

File Class Built-in Functions

PeopleCode Language Reference: CreateDirectory function

PeopleCode Language Reference: FileExists function

PeopleCode Language Reference: FindFiles function

PeopleCode Language Reference: GetFile function

PeopleCode Language Reference: GetTempFile function

PeopleCode Language Reference: RemoveDirectory function

File Class Methods

In this section, we discuss the File class methods. The methods are discussed in alphabetical order.

Close method: File class

Syntax

close()

Description

The Close method discards any changes that haven't been written to the external file, disassociates the file object from the external file, releases all resources connected with the file object, and causes the file object to go out of scope.

You cannot use any methods or properties on the object after it is closed. You must get another file object (using the GetFile function) and instantiate another file object after you use Close.

Parameters

None.

Returns

None.

Example

```
&MYFILE.Open("somefile.txt", "w", %FilePath_Relative);  
&MYFILE.WriteLine("Some text.");  
&MYFILE.Close();
```

Related Topics

- [Open method: File class](#)
- [IsOpen property: File class](#)
- PeopleCode Language Reference: GetFile function

CreateRowset method: File class

Syntax

```
CreateRowset()
```

Description

The CreateRowset method is a file layout method. It instantiates a PeopleCode rowset object containing one unpopulated row, based on the file layout definition specified with SetFileLayout.

Note

You must specify a file layout using the SetFileLayout method before using CreateRowset, otherwise it returns NULL.

See [SetFileLayout method: File class](#).

After the empty rowset object has been created, you can use Rowset class methods such as Select or Fill, and built-in functions such as GetLevel0 or GetRowset, to populate the rowset with data. After the rowset contains data, you can use the method WriteRowset to write the data to a file.

Don't use CreateRowset when reading from a file. Instead, use the ReadRowset method to instantiate and populate rowsets with data from the file.

Parameters

None.

Returns

An empty rowset object.

Example

```
&SOMEROWSET = &MYFILE.CreateRowset();
```

The following rowset is created from a file object, then populated with data using the `GetLevel0` function:

```
&FILEROWSET = &MYFILE.CreateRowset();  
&FILEROWSET = GetLevel0();  
&MYFILE.WriteRowset(&FILEROWSET, True);
```

The following rowset is created from a file object, then populated with data using `Fill` method:

```
&FILEROWSET = &MYFILE.CreateRowset();  
&NUM_READ = &FILEROWSET.Fill("where MYRECORD = :1", &UVAL);
```

Related Topics

- [ReadRowset method: File class](#)
- [SetFileLayout method: File class](#)
- [WriteRowset method: File class](#)
- [Understanding Rowset Class](#)

A *rowset* object, instantiated from a *Rowset* class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

Delete method: File class

Syntax

```
Delete()
```

Description

Use the `Delete` method to delete an open file. You cannot delete a closed file.

Parameters

None.

Returns

None.

Example

```
/* Open a temporary file. Use the "N" parameter to ensure  
the file is new. */  
  
&MyFile = GetFile("temp.txt", "N", "UTF8");  
  
/* verify the file was instantiated successfully */
```

```
/* do processing using the temporary file */  
  
/* delete the temporary file */  
  
&MyFile.Delete();
```

Related Topics

- [Open method: File class](#)
- [Close method: File class](#)
- PeopleCode Language Reference: GetFile function

GenerateHttpURL method: File class

Syntax

`GenerateHttpURL(URLID, FileName, User_ID, IsSecure, Time_to_Live, IsCaseSensitive)`

Description

Use the GenerateHttpURL method to create an http(s) URL for a file in the PeopleSoft supported repository.

Parameters

Parameter	Description
<i>URLID</i>	Specifies the URLID of the existing file repository on the PeopleSoft system where the file is stored.
<i>FileName</i>	Specifies the name of the file in the repository. If the file is available in a folder, the complete path should be included as part of the file name.
<i>User_ID</i>	Specifies the user for whom the request is created.
<i>IsSecure</i>	Specifies a Boolean value indicating whether the URL string should be https or not. The default is Yes, that is, an https URL string is created.
<i>Time_to_Live</i>	Specifies the time (in seconds) that the https link should be active from the time it is requested. The default is 600 seconds (that is, 10 minutes).
<i>IsCaseSensitive</i>	Specifies a Boolean value indicating whether the search for the file in the repository should be case sensitive or not. The default is False (that is, case-insensitive search).

Returns

A String value containing the complete URL string. The URL is taken from the default portal node. If the portal node does not contain valid information, the generated URL could be invalid.

Example

```
&strURL = GenerateHttpURL("TESTSFTP", "PeopleBook.pdf", "PS", True, 600);
```

GetBase64StringFromBinary method: File class

Syntax

```
GetBase64StringFromBinary()
```

Description

Use this method to read the complete contents of the binary file associated with the current File object, encode the data using Base64, and return the result as a Base64-encoded string.

Parameters

None.

Returns

A string containing the contents of the binary file encoded in Base64.

Example

```
Local File &F1;  
Local string &base64string;  
  
&F1 = GetFile("D:\image.jpg", "R", "UTF8", %FilePath_Absolute);  
If &F1.IsOpen Then  
    &base64string = &F1.GetBase64StringFromBinary();  
    &F1.Close();  
End-If;
```

Related Topics

- [WriteBase64StringToBinary method: File class](#)

GetPosition method: File class

Syntax

```
GetPosition()
```

Description

The GetPosition method returns the current read or write position in the external file. GetPosition works only with a file that was opened in Update mode. This method is designed to be used in combination with the SetPosition method to establish checkpoints for restarting during file access.

Note

Currently, the effect of the Update mode and the `GetPosition` and `SetPosition` methods is not well defined for Unicode files. Use the Update mode only on files stored with a non-Unicode character set.

Parameters

None.

Returns

A number representing the current read or write position in the file.

Note

When you use `ReadRowset` to read from a file in Update mode, the `CurrentRecord` property returns, the entire record just read. The current read/write position is at the *end* of the `CurrentRecord`, that is, just past the end of the rowset.

Example

The following example opens a file in Update mode, and saves the current position after each read operation:

```
&MYFILE.Open(&SOMENAME, "U");  
If &MYFILE.IsOpen Then  
    while &MYFILE.ReadLine(&SOMESTRING)  
        &CURPOS = &MYFILE.GetPosition();  
        /* Save the value of &CURPOS after each read,  
           and process the contents of each &SOMESTRING */  
    End-While;  
End-If;  
&MYFILE.Close();
```

Related Topics

- [Open method: File class](#)
- [SetPosition method: File class](#)
- [File Access Interruption Recovery](#)

You can use the `GetPosition` or `SetPosition` methods to minimize the loss of work in the event of a system failure during file access. To use them and recover from access interruptions, you must access the file in Update mode using the `GetFile` built-in function or the `Open` method, specifying the mode parameter "U". You need to use this mode in anticipation of possible interruptions if you want to recover from them later.

- PeopleCode Language Reference: `GetFile` function

GetString method: File class

Syntax

```
GetString([Strip_Line_Terminator])
```

Description

Use the GetString method to return the entire file as a single string.

Note

After this method completes successfully, the original file is deleted.

You can specify whether the resulting string is to include the line terminator characters or not by using the *Strip_Line_Terminator* parameter. The default value for this parameter is false, which means the resulting string includes the line terminator characters at the end of each line.

For example on a Unix system, with a line terminator of a LF, the resulting string includes not only the data for each line, but the LF character as well.

Parameters

Parameter	Description
<i>Strip_Line_Terminator</i>	Specify whether the line terminators are to be stripped or not.

Returns

A single string containing the entire contents of the file.

Example

The following example creates a file on a Windows system, then retrieves it as a single line of text.

Note

The file is destroyed on successful completion of this method.

```
Local File &File = GetFile("c:\temp\junk\something.txt", "W", "UTF8",  
%FilePath_Absolute)  
/* write a bunch of > 2048 length lines */  
  
Local string &piece, &input;  
Local integer &I;  
  
&piece = "123456789-";  
While Len(&piece) < 2048
```

```

        &piece = &piece | &piece;
    End-While;

    &File.WriteString(&piece);
    &File.WriteString(&piece);
    &File.WriteString(&piece);
    &input = &File.GetString( True);
    &File.Close();
    Local string &pieces = &piece | &piece | &piece;

    /* Note that the result of this message should indicate &pieces is the same
    as⇒
    &input */
    MessageBox(0, "", 0, 0, "&piece = &input: Len(&pieces)=" | Len(&pieces) | "
    Len⇒
    (&input)=" | Len(&input) | " Same? " | (&pieces = &input));

```

Related Topics

- [ReadLine method: File class](#)
- [WriteLine method: File class](#)
- [WriteRaw method: File class](#)

Open method: File class

Syntax

```
Open(filespec, mode [, charset] [, pathtype])
```

Description

The Open method associates the file object with an external file for input or output.

If the File object is currently associated with a file, that file is closed first. In addition, any file opened for writing (by a call to the GetFile function or the Open method) by a PeopleCode program that runs in the Process Scheduler is automatically managed by the Report Repository.

You can use the GetFile or GetTempFile functions to access an external file, but each execution of GetFile or GetTempFile instantiates a new file object. If you plan to access only one file at a time, you need only one file object. Use GetFile or GetTempFile to instantiate a file object for the first external file you access. Then, use Open to associate the same file object with as many different external files as you want. However, if you expect to have multiple files open at the same time, you need to instantiate multiple file objects with GetFile or GetTempFile.

GetFile and Open both perform implicit commits. Therefore, the GetTempFile function has been introduced specifically to avoid these implicit database commits. GetTempFile differs from GetFile in two respects:

- GetTempFile does not perform an implicit commit.
- GetTempFile does not make the associated file available through the Report Repository even when the calling PeopleCode program is run through the Process Scheduler.

Therefore, GetTempFile can be a good choice when you wish to avoid implicit database commits and when you do not need to have the file managed through the Report Repository. Otherwise, GetTempFile operates exactly the same as GetFile.

Parameters

Parameter	Description
<i>filespec</i>	Specify the name, and optionally, the path, of the file you want to open.

Parameter	Description
<i>mode</i>	A string indicating the manner in which you want to access the file. The mode can be one of the following: • "R" (Read mode): opens the file for reading, starting at the beginning. • "W" (Write mode): opens the file for writing. Warning! When you specify Write mode, any existing content in the file is discarded. • "A" (Append mode): opens the file for writing, starting at the end. Any existing content is retained. • "U" (Update mode): opens the file for reading or writing, starting at the beginning of the file. Any existing content is retained. Use this mode and the <code>GetPosition</code> and <code>SetPosition</code> methods to maintain checkpoints of the current read/write position in the file. In Update mode, any write operation clears the file of all data that follows the position you set. Note: Currently, the effect of the Update mode and the <code>GetPosition</code> and <code>SetPosition</code> methods is not well defined for Unicode files. Use the Update mode only on files stored with a non-Unicode character set. • "E" (Conditional "exist" read mode): opens the file for reading only if it exists, starting at the beginning. If it doesn't exist, the <code>Open</code> method has no effect. Before attempting to read from the file, use the <code>IsOpen</code> property to confirm that it's open. • "N" (Conditional "new" write mode): opens the file for writing, only if it doesn't already exist. If a file by the same name already exists, the <code>Open</code> method has no effect. Before attempting to write to the file, use the <code>IsOpen</code> property to confirm that it's open. You can insert an asterisk (*) in the file name to ensure that a new file is created. The system replaces the asterisk with numbers starting at 1 and incrementing by 1, and checks for the existence of a file by each resulting name in turn. It uses the first name for which a file <i>doesn't</i> exist. In this way you can generate a set of automatically numbered files. If you insert more than one asterisk, all but the first one are discarded.

Parameter	Description
<i>charset</i>	A string indicating the character set you expect when you read the file, or the character set you want to use when you write to the file. You can abbreviate Unicode UCS-2 to "U". All other character sets should be spelled out in full, for example, ASCII, Big5, Shift-JIS, UTF8, or UTF8BOM. It is <i>not</i> recommended to specify "A" as the character set, as its use has been desupported and will resolve to platform-dependent character sets. Similarly, not specifying a character set has the same outcome as specifying "A" and is not recommended due to the variable nature of the outcome. If "A" is specified as the character set, or you do not specify a character set, the character set used is dependent on the OS of the server host where your PeopleCode program is running. If the server is Windows, the default character set used will be the active Windows ANSI Codepage (ACP), which can be checked using the DOS command chcp. If the server is Unix/Linux, the character set used is dependent on the server configuration file (psappsrv.cfg or psprcs.cfg). If the Character Set property is commented out or not specified in the configuration file, the default character set will be UTF-8. You can also use a record field value to specify the character set (for example, RECORD.CHARSET.) A list of supported character set names valid for this argument can be found in <i>PeopleTools: Global Technology</i>. See Global Technology: Character Sets Across the Tiers of the PeopleSoft Architecture. Note: If you attempt to read data from a file using a different character set than was used to write that data to the file, the methods used generate a runtime error or the data returned is unusable. When a file is opened for reading using the "U" <i>charset</i> argument, GetFile expects the file to begin with a Unicode byte order mark (BOM). This mark indicates whether the file is written in big-endian order or little-endian order. A BOM consisting of the hex value 0xFEFF indicates a big-endian file, a BOM consisting of the hex value 0xFFEF indicates a little-endian file. If the Unicode UCS-2 file being opened does not start with a BOM, an error is returned. The BOM is automatically stripped from the file when it is read into the buffers by GetFile. When a file is opened for writing using the "U" <i>charset</i> argument, the appropriate Unicode BOM is automatically written to the start of the file depending on whether the application

Parameter	Description
	server hardware platform operates in little-endian or big-endian mode. BOMs are only expected or supported for files in Unicode character sets such as UTF8, UTF8BOM, and UCS2. For consuming applications that do expect the BOM for UTF-8 files, the UTF8BOM character set is to create UTF-8 files with the BOM. Note: For example, the UTF-8 BOM is represented by the sequence 0xEF BB BF. This sequence can be misinterpreted by a non-Unicode character set such as ISO-8859-1 and appears as ISO characters ì»¿. When working with XML documents, specify UTF8 or UTF8BOM for <i>charset</i>. If you are writing an XML file using a different character set, you must remember to include a character set declaration in the XML file. In some cases, a Unicode file (UCS-2 or UTF-8) cannot be opened. An error message is displayed, when one of the following error conditions is encountered: • If the character set is U (that is, UCS2) and the mode is: – A: The file is empty or the BOM is missing or incorrect. – R: The BOM is missing or incorrect. – W: The file does not exist, or adding the BOM failed. • If the character set is UTF8 or UTF8BOM and the mode is: – R: For UTF8BOM, the BOM is missing or the file is empty; for UTF8, the file is empty. – A or W: For UTF8BOM only, the file does not exist or adding the BOM failed.

Parameter	Description
<i>pathtype</i>	If you have prepended a path to the file name, use this parameter to specify whether the path is an absolute or relative path. The valid values for this parameter are: • %FilePath_Relative (default) • %FilePath_Absolute If you don't specify <i>pathtype</i> the default is %FilePath_Relative. If you specify a relative path, that path is appended to the path constructed from a system-chosen environment variable. A complete discussion of relative paths and environment variables is provided in documentation on the File class. See Working With Relative Paths. If the path is an absolute path, whatever path you specify is used verbatim. You must specify a drive letter and the complete path. You can't use any wildcards when specifying a path. The Component Processor automatically converts platform-specific separator characters to the appropriate form for where your PeopleCode program is executing. On a Windows system, UNIX "/" separators are converted to "\", and on a UNIX system, Windows "\" separators are converted to "/". Note: The syntax of the file path does <i>not</i> depend on the file system of the platform where the file is actually stored; it depends only on the platform where your PeopleCode is executing.

Returns

None.

Example

The following example opens an existing UCS-2 file for reading:

```
&MYFILE.Open(&SOMENAME, "E", "U");
If &MYFILE.IsOpen Then
    while &MYFILE.ReadLine(&SOMESTRING)
        /* Process the contents of each &SOMESTRING */
    End-While;
    &MYFILE.Close();
End-If;
```

The following example opens a numbered file for writing in ANSI format, without overwriting any existing files:

```
&MYFILE.Open("C:\temp\item*.txt", "N", %FilePath_Absolute);
If &MYFILE.IsOpen Then
    &MYFILE.WriteLine("Some text.");
```



```
&MYFILE.Close();  
End-If;
```

Related Topics

- [IsOpen property: File class](#)
- [SetPosition method: File class](#)
- [GetPosition method: File class](#)
- [Close method: File class](#)
- [File Access Interruption Recovery](#)
You can use the `GetPosition` or `SetPosition` methods to minimize the loss of work in the event of a system failure during file access. To use them and recover from access interruptions, you must access the file in Update mode using the `GetFile` built-in function or the `Open` method, specifying the mode parameter "U". You need to use this mode in anticipation of possible interruptions if you want to recover from them later.
- PeopleCode Language Reference: `GetFile` function
- PeopleCode Language Reference: `GetTempFile` function

ReadFileStream method: File class

Syntax

```
ReadFileStream(URL, URLID, FileName, URL_ID)
```

Description

Use the `ReadFileStream` method to read the file stream from an http(s) URL and store that data into a file in the supported repository.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL from which the stream should be read.
<i>URLID</i>	Specifies the URLID of the existing file repository on the PeopleSoft system where the file needs to be stored.
<i>FileName</i>	Specifies the name of the file that will be stored.
<i>URL_ID</i>	This parameter is optional. Use the <code>URL_ID</code> parameter if you require any additional parameters for the <code>URLID</code> parameter, such as proxy. The URL string for this parameter can be a dummy value.

Returns

An Integer value indicating the status, where 0 (zero) indicates success and any non-zero value indicates failure.

Errors are written to log file.

Example

```
&nRetcode = ReadFileStream("https://docs.oracle.com/cd/E87545_01/psft/pdf/pt856tpcl-b052017.pdf", "TESTSFTP", "PeopleBook.pdf");
```

ReadLine method: File class

Syntax

```
ReadLine(string)
```

Description

The ReadLine method reads one line of text from the external file. The line includes the newline character, but ReadLine strips out the newline character and inserts the result into the string variable *string*.

When ReadLine is executed, it moves the starting point for the next read operation to the end of the text just retrieved, so each line in the file can be read in turn by subsequent ReadLine operations. When no more data remains to be read from the file, ReadLine returns False, and clears the string variable of any content.

When the file object has been instantiated using a Unicode character set (UTF8, UTF8BOM, or UCS2) and the file has a Unicode byte order mark (BOM), the BOM is recognized as file metadata and is not treated as text. However, when the file has been instantiated using a non-Unicode character set and the file has a Unicode BOM, this is likely a user error; the BOM is treated as text and is *not* recognized as file metadata.

Parameters

Parameter	Description
<i>string</i>	A string variable that receives the input text.

Returns

A Boolean value: True if the method succeeds, False otherwise. The return value is *not* optional, it is required.

Example

The following example reads a file called &MYFILE and puts each line as a separate element in an array.

```
Local File &MYFILE;  
Local array of string &MYARRAY;  
Local string &TEXT;  
  
&MYFILE = GetFile("names.txt", "R", "UTF8BOM");  
&MYARRAY = CreateArrayRept("", 0);  
While &MYFILE.ReadLine(&TEXT);  
    &MYARRAY.Push(&TEXT);  
End-While;  
&MYFILE.Close();
```

Related Topics

- [GetString method: File class](#)
- [ReadRowset method: File class](#)
- [WriteString method: File class](#)
- [WriteLine method: File class](#)

ReadRowset method: File class

Syntax

```
ReadRowset()
```

Description

The ReadRowset method is a file layout method. It instantiates a PeopleCode rowset object based on the file layout definition, then populates the rowset with one transaction from the file. A transaction is considered to be one instance of level zero data contained in a file record, plus all of its subordinate data. If you put more than one segment at level zero, each segment is read in sequence.

Note

You must specify a file layout using the SetFileLayout method before using ReadRowset, otherwise it will return NULL.

When ReadRowset is executed, it moves the starting point for the next read operation to the beginning of the next rowset, so each transaction in the file can be read in turn by subsequent ReadRowset operations. When no more data remains to be read from the file, ReadRowset returns NULL.

If you're using the SetFileId method with ReadRowset to process an input file based on multiple file layouts, ReadRowset returns NULL when it reads a FileId file record (line) between the rowsets.

When ReadRowset returns NULL, you can use the IsFileId property to determine if you've reached the end of the file or a FileId record.

Note

When using ReadRowset, if a value in the file exceeds the defined length in the file layout, it is ignored. The given record field is flagged with an edit error which can be programmatically checked.

If the ReadRowset encounters a line in the file containing the FileId, and the lines following this are *not* a new rowset, the process considers it to be an invalid FileId. You can specify whether to ignore the invalid record or terminate the PeopleCode with the IgnoreInvalidId property.

Note

If you're using the `SetFileId` method with `ReadRowset` to process an input file based on multiple layouts, `FileId` file records between the rowsets are considered to be valid file records, and won't generate any errors, regardless of the state of the `IgnoreInvalidId` property.

See [SetFileLayout method: File class](#).

Parameters

None.

Returns

A populated rowset.

Example

The following example reads and processes an entire file. The data in the file is based on a single File layout definition:

```
&MYFILE.GetFile(&SOMENAME, "R", "UTF8");  
If &MYFILE.SetFileLayout(FILELAYOUT.SOMELAYOUT) then  
    &SOMEROWSET = &MYFILE.ReadRowset();  
    While &SOMEROWSET <> NULL  
        /* Process the contents of each &SOMEROWSET */  
        &SOMEROWSET = &MYFILE.ReadRowset();  
    End-While;  
End-If;  
&MYFILE.Close();
```

Considerations for Using Dates With ReadRowset

Single digits in dates in the form MMDDYY or MMDDYYYY must be padded with zeros. That is, if the date in your data is February 3, 2000, the form must be:

02/03/2000

or

02/03/00

The following is *not* valid.

2/3/00

Considerations for Using XML With ReadRowset

If all of the fields in the file layout are not present in the XML, no data is written to the database. If there are additional tags in the XML, they are ignored.

Considerations for Using Nested Data with ReadRowset

If you are processing input files with a large amount of nested data, your application server may run out of memory before the system finishes processing all of the data.

This may happen because of the differences between processing a single-level rowset and a multi-level rowset. If you are reading the rows of a single-level (level 0) rowset from a file, the file is processed one row at a time, that is, only one row resides in memory at a time.

However, if you are reading the rows of a multi-level (parent-child) rowset from a file, then for each level 0 row, *all* of the associated child rows (and all of their associated child rows) simultaneously reside in memory. As a result, during the processing a large input data file that is associated with a multi-level rowset (through a multi-level file layout definition), your application server may run out of memory.

To work around this, consider doing one of the following:

- Retain your original file layout definition and split the original input file into smaller (but structurally unchanged) pieces
- Flatten out your original file layout definition (that is, split it up into several single-level definitions) as well as split the original input file into several single-level pieces.

Considerations for Using Default Values with ReadRowset

The system variables related to date and time (for example, %Date, %Time, and %DateTime) cannot be used to specify the value of the Default Value property of a file layout field. This topic is covered in detail in the Application Designer PeopleBook.

See Application Designer Developer's Guide: Specifying File Field Properties

Related Topics

- [CurrentRecord property: File class](#)
- [IgnoreInvalidId property: File class](#)
- [GetString method: File class](#)
- [ReadLine method: File class](#)
- [SetFileLayout method: File class](#)
- [WriteRecord method: File class](#)
- [WriteRowset method: File class](#)

- [Multiple File Layouts](#)

In the previous examples, the input file contained rowsets based on a single File Layout definition. However, PeopleTools provides the functionality to process input files containing rowsets that require several *different* File Layouts.

- [ReadRowset Example](#)

The following program reads all the rowsets from a file and updates a work scroll with that data. The work scroll isn't hidden on the page: it's created in the Component buffer from existing records using CreateRowset. The structure of the work scroll and the file layout are identical: that is, they're composed of two records, and the names of the records in the file layout are exactly the same as the names of the record definitions.

- [IsEditError property: Rowset class](#)

SetFileId method: File class

Syntax

```
SetFileId(fileid, position)
```

Description

The SetFileId method is a file layout method. If your input file contains data based on more than one File Layout definition, you must use this method in combination with the CurrentRecord and IsNewFileId properties and the ReadRowset method to process the file correctly.

Note

SetFileId, CurrentRecord and IsNewFileId don't apply to CSV and XML format input files. You can use only fixed format files to implement multiple file layouts.

See [CurrentRecord property: File class](#), [IsNewFileId property: File class](#), [ReadRowset method: File class](#).

At each point in the input file where the structure of the rowset changes, there must be an extra line in the file containing the file record (line), the FileId file record (line), that signifies that the change. Each FileId file record must have the following components:

- A value that designates it as a FileId. Only one FileId value is necessary throughout the file, such as "999".
- A name field that identifies the file layout needed for the rowset that follows. This field could contain the name of the file layout as it's defined in Application Designer.

These lines containing the FileId are *not* part of any rowset. They can contain other information, which will be disregarded by the system. The FileId identifier and the file layout names aren't automatically stored anywhere; they exist only in the input file's FileId file records and in the PeopleCode.

To process an input file that requires multiple file layouts:

1. Use SetFileLayout to specify the file layout definition to use.

If you're specifying the initial file layout for this file, it doesn't have to be the correct one. You can determine the correct file layout to use for the first rowset during a subsequent step.

2. Use SetFileId to specify the value of the FileId field, *fileid*, that's used throughout the file to designate FileId file records.

Note

After each execution of SetFileLayout, the SetFileId setting is disabled. Be sure to re-specify the FileId value if you expect the file layout to change, so the system continues looking for the next FileId file record.

3. Use `ReadRowset` to read the next rowset from the file.

The current file record is also stored in the `CurrentRecord` property as a string. The PeopleCode process determines whether it's the beginning of a new rowset, or a `FileId` file record according to the *fileid* you specified. If it's a `FileId` file record, the process sets the `IsNewFileId` property to `True`; if not, it sets the `IsNewFileId` property to `False`.

Note

If this is the first execution of `ReadRowset` on the file, it returns `NULL` upon encountering the initial `FileId` file record, but still stores that file record in `CurrentRecord` and sets `IsNewFileId` accordingly.

4. If the rowset returned isn't `NULL`, process that rowset as necessary.
5. If `IsNewFileId` is `False`, go back to step 3 to continue reading rowsets from the file. If `IsNewFileId` is `True`, examine `CurrentRecord` to determine which new file layout to use, and go back to step 1.

You can repeat this procedure one rowset at a time, proceeding through the remainder of the input file. When `ReadRowset` returns `NULL`, no more rowset data is available.

Parameters

Parameter	Description
<i>fileid</i>	Specify the value of the <code>FileId</code> field used in the current file.
<i>position</i>	Specify the column in the <code>FileId</code> file record where the <code>FileId</code> field starts. The default is 1.

Returns

None.

Example

```
&rsFile = &MYFILE.ReadRowset();  
&CurrentRecord = &MYFILE.CurrentRecord;  
&IsNewFileID = &MYFILE.IsNewFileId;  
If &MYFILE.IsNewFileId Then  
    &FILELAYOUT = FindFileID(&CurrentRecord);  
    &MYFILE.SetFileLayout(@"FileLayout." | &FILELAYOUT);  
    &MYFILE.SetFileId("999", 1);  
End-If;
```

Related Topics

- [CurrentRecord property: File class](#)
- [IsNewFileId property: File class](#)
- [ReadRowset method: File class](#)
- [SetFileLayout method: File class](#)

- [File Layout Examples](#)
If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, you want to use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)
- Application Designer Developer's Guide: Understanding File Layouts

SetFileLayout method: File class

Syntax

SetFileLayout(FILELAYOUT.*filelayoutname*)

Description

The SetFileLayout method is a file layout method. It associates a specific file layout definition with the file object executing this method, providing easy access to rowset data. The file object must be associated with an open file. With file layout definitions, you can read and write rowsets as easily as strings. If the file object isn't open or the definition doesn't exist, SetFileLayout fails.

You must execute SetFileLayout before you can use any other file layout methods or properties with a file object, otherwise those methods and properties return NULL or False.

Note

All provided PeopleTools records that have a prefix of PSFLD are related to file layout definitions.

Parameters

Parameter	Description
<i>filelayoutname</i>	Specify as a string the name of an existing file layout definition created in Application Designer.

Returns

A Boolean value: True if the method succeeds, False otherwise.

Example

The following example opens a data file, associates a file layout definition with it, reads and processes the first rowset from it, and closes the file.

```
&MYFILE.Open(&SOMENAME, "E");
If &MYFILE.SetFileLayout(FILELAYOUT.SOMELAYOUT) then
    &SOMEROWSET = &MYFILE.ReadRowset();
    /* Process the contents of &SOMEROWSET */
Else
    /* Error - SetFileLayout failed */
End-If;
&MYFILE.Close();
```


Related Topics

- [CurrentRecord property: File class](#)
- [CreateRowset method: File class](#)
- [ReadRowset method: File class](#)
- [IgnoreInvalidId property: File class](#)
- [WriteRowset method: File class](#)
- [File Layout Examples](#)
If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, you want to use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)
- Application Designer Developer's Guide: Understanding File Layouts

SetPosition method: File class

Syntax

SetPosition(*position*)

Description

The SetPosition method sets the current read or write position in the external file associated with the file object executing this method. SetPosition works only with a file, which is opened in Update mode, and is designed to be used in combination with the GetPosition method to recover from interruptions during file access.

To start reading or writing from the beginning of a file, you must use SetPosition to set a read/write position of 0, immediately after you open the file in Update mode.

Parameters

Parameter	Description
<i>position</i>	The byte position in the file at which you want to continue reading or writing. This should either be 0 or a value you previously obtained with the GetPosition method and saved in a separate file or a database.



Warning

In Update mode, any write operation clears the file of all data that follows the position you set.



Note

Use SetPosition only for recovering from file access interruptions. Supplying your own value for SetPosition isn't recommended, except for position 0.

Returns

None.

Example

The following example reopens a file in Update mode, and sets the read position to the last saved checkpoint:

```
&MYFILE = GetFile(&SOMENAME, "U", "UTF8");
If &MYFILE.IsOpen Then
    /* Retrieve the value of the last saved checkpoint, &LASTPOS */
    &MYFILE.SetPosition(&LASTPOS);
    while &MYFILE.ReadLine(&SOMESTRING)
        /* Process the contents of each &SOMESTRING */
    End-While;
    &MYFILE.Close();
End-If;
```

Note

Currently, the effect of the Update mode and the GetPosition and SetPosition methods is not well defined for Unicode files. Use the Update mode only on files stored with a non-Unicode character set.

Related Topics

- [GetPosition method: File class](#)
- [Open method: File class](#)
- [File Access Interruption Recovery](#)
You can use the GetPosition or SetPosition methods to minimize the loss of work in the event of a system failure during file access. To use them and recover from access interruptions, you must access the file in Update mode using the GetFile built-in function or the Open method, specifying the mode parameter "U". You need to use this mode in anticipation of possible interruptions if you want to recover from them later.
- PeopleCode Language Reference: GetFile function

SetRecTerminator method: File class

Syntax

```
SetRecTerminator(Terminator)
```

Description

The SetRecTerminator method is a file layout method.

Use this method to specify the string of characters that indicate the end of a file record. Read operations use the value of SetRecTerminator to determine where each file record ends and the next one starts, and write operations append the value of SetRecTerminator to each record written.

This value defaults to the newline character appropriate to the platform where the file is being stored:

- a linefeed on UNIX systems
- a carriage return/linefeed combination on Windows systems

You need to specify a different record terminator only if you anticipate that part of the data in a file field that includes the newline character used on the storage platform; you must assign the record terminator a unique string that you know does not appear in a file field.

Note

The segment terminator of a file record is *not* the same as its record terminator. The segment terminator occurs immediately after a single row of data; it is defined only at design time in the File Layout Designer. The record terminator occurs immediately after the segment terminator; it is defined only at runtime by the `SetRecTerminator` method of the File class.

See Application Designer Developer's Guide: Specifying File Record Properties for information on the segment terminator.

Parameters

Parameter	Description
<i>Terminator</i>	Specify the value you want used for the record terminator.

Returns

None.

Example

```
&File = GetFile(.....);

if &File.IsOpen then
    /* set the terminator to be space */
    Local String &Term = " ";
    &File.SetRecTerminator(&Term);
```

WriteBase64StringToBinary method: File class

Syntax

```
WriteBase64StringToBinary(encoded_string)
```

Description

Use this method to decode the input string using Base64 and write the resulting bytes to the output file associated with the current File object.

Parameters

Parameter	Description
<i>encoded_string</i>	Specifies a Base64-encoded string.

Returns

None.

Example

```
Local File &F1;  
Local string &base64string;  
  
/* Load the Base64 string data into &base64string */  
&base64string = "...";  
  
&F1 = GetFile("D:\anImage.jpg", "W", "UTF8", %FilePath_Absolute);  
If &F1.IsOpen Then  
    &F1.WriteBase64StringToBinary(&base64string);  
    &F1.Close();  
End-If;
```

Related Topics

- [GetBase64StringFromBinary method: File class](#)

WriteLine method: File class

Syntax

```
WriteLine(string)
```

Description

The WriteLine method writes one string of text, *string*, to the output file associated with the file object executing this method, followed by a newline character appropriate to the platform where the file is being written. To build a single line using multiple strings, use the WriteString method.

When the file object has been instantiated using a Unicode character set (UTF8, UTF8BOM, or UCS2) and the file has a Unicode byte order mark (BOM), the BOM is recognized as file metadata and is not treated as text. However, when the file has been instantiated using a non-Unicode character set and the file has a Unicode BOM, this is likely a user error; the BOM is treated as text and is *not* recognized as file metadata.

For writing UTF-8 files, use the UTF8BOM character set when instantiating the file object to include the Unicode BOM in output. Alternatively, use the UTF8 character set when instantiating the file object to exclude the BOM in output. Specify the character set depending on what the consuming application expects. When in doubt, use UTF8BOM to include the BOM. If the consuming application is the File class ReadLine method, either option will work. For clarity, always specify the *charset* parameter for calls to GetFile, GetTempFile, or Open, and match up *charset* with the character set used for writing and reading the file's content.

Parameters

Parameter	Description
<i>string</i>	The string of text to be written.

Returns

None.

Example

The following example adds a line of text to an existing file:

```
&MYFILE.Open("somefile.txt", "A", "UTF8BOM");
&MYFILE.WriteLine("This is the last line in the file.");
&MYFILE.Close();
```

The following example converts a file where the fields are separated with tabs into a file where the fields are separated with commas.

```
Local File &TABFILE, &CSVFILE;
Local string &FILE_NAME, &DATA, &NEWDATA;

&FILE_NAME = "Test.txt";
&TAB = Char(9);

&TABFILE = GetFile(&FILE_NAME, R", "UTF8BOM");
&FileName = &TABFILE.Name;
&POS = Find(".", &FileName);
&NEWFILE_NAME = Substring(&FileName, 1, &POS) | "dat";
&CSVFILE = GetFile(&NEWFILE_NAME, "N", "UTF8", %FilePath_Absolute);
If &TABFILE.IsOpen And
    &CSVFILE.IsOpen Then
    While &TABFILE.ReadLine(&DATA);
        &NEWDATA = Substitute(&DATA, &TAB, ",");
        &CSVFILE.WriteLine(&NEWDATA);
    End-While;
    &TABFILE.Close();
    &CSVFILE.Close();
End-If;
```

Related Topics

- [GetString method: File class](#)
- [ReadLine method: File class](#)
- [WriteString method: File class](#)
- [WriteRaw method: File class](#)

WriteRaw method: File class

Syntax

```
WriteRaw(RawBinary)
```

Description

The WriteRaw method writes the contents of *RawBinary* to a file. This can be used for writing images, messages, or other types of raw binary data to a file.

Parameters

Parameter	Description
<i>RawBinary</i>	Specify the raw binary to be written to the file.

Returns

None.

Example

The following example writes employee photos (GIF files) from a record to a file.

```
Local File &FILE;  
Local Record &REC;  
Local SQL &SQL;  
  
&REC = CreateRecord(Record.EMPL_PHOTO);  
&SQL = CreateSQL("%SelectAll(:1)", Record.EMPL_PHOTO);  
  
&FILE = GetFile("C:\temp\EMPL_PHOTO.GIF", "w", "UTF8", %FilePath_Absolute);  
  
While &SQL1.Fetch(&REC)  
    &FILE.WriteRaw(&REC.EMPLOYEE_PHOTO.Value);  
End-While;  
  
&FILE.Close();
```

Related Topics

- [WriteLine method: File class](#)
- [WriteString method: File class](#)

WriteRecord method: File class

Syntax

```
WriteRecord(record)
```

Description

The WriteRecord method is a file layout method. It writes the contents of the record object *record*, to the output file. (Remember, a record object contains only one row of data from an SQL table.)

You can use this method to build a transaction in the output file, one file record at a time, without having to instantiate and populate a rowset object. You can apply this method to any record whose structure and name matches that of a record defined in the current file layout.

Note

You must execute the SetFileld method from the file object before using WriteRecord, otherwise it returns False.

See [SetFileLayout method: File class](#).

Note

When you're writing text to an XML file, special HTML characters, such as ampersands, lesser than or greater than symbols, and so on, are automatically converted to valid XML character string, such as &.

Parameters

Parameter	Description
<i>record</i>	Specify the name of an existing record object to be written. You can use Rowset class methods such as GetField and built-in functions such as GetRecord to populate the record with data before writing it to the file.

Returns

A Boolean value: True if the method succeeds, False otherwise. This value is optional.

Example

The following example appends all the data in a record to an existing file:

```
Local File &MYFILE;  
  
&MYFILE = GetFile("record.txt", "A", "UTF8");  
  
If &MYFILE.IsOpen Then  
    If &MYFILE.SetFileLayout(FILELAYOUT.VOL_TEST) Then  
        &LN = CreateRecord(RECORD.VOLNTER_ORG_TBL);  
        &SQL2 = CreateSQL("%Selectall(:1)", &LN);  
        While &SQL2.Fetch(&LN)  
            &MYFILE.WriteRecord(&LN);  
        End-While;  
    End-If;  
End-If;
```

```

        Else
            /* do error processing - filelayout not correct */
        End-If;
    Else
        /* do error processing -; file not open */
    End-If;

    &MYFILE.Close();

```

Considerations Using XML With File Definition Tags

File Definition Tags have no effect when importing data. However, generally, during export, the File Definition Tag is added at the start and end of the data to create a valid XML file.

The one exception is when the file to which the data is being written during export has been opened in append mode. At that time, the file definition tag is not taken into consideration.

Considerations Using XML with File Definitions

If your file layout is defined as XML, WriteRecord doesn't add the closing tag for the record. You must write it yourself using the WriteLine method. This is because the code has no way of knowing when you want to write children records following the record just written out.

The following code shows an example of using WriteLine:

```

Local File &MYFILE;

&MYFILE = GetFile("XMLrecord.txt", "A", "UTF8");

If &MYFILE.IsOpen Then
    If &MYFILE.SetFileLayout(FILELAYOUT.RECORDLAYOUT) Then
        &LN = CreateRecord(RECORD.QA_INVEST_LN);
        &SQL2 = CreateSQL("%Selectall(:1)", &LN);
        While &SQL2.Fetch(&LN)
            &MYFILE.WriteRecord(&LN);
            WriteLine("</QA_INVEST_LN>"); /* Add the closing tag */
        End-While;
    Else
        /* do error processing - filelayout not correct */
    End-If;
Else
    /* do error processing - file not open */
End-If;

&MYFILE.Close();

```

Related Topics

- [CreateRowset method: File class](#)
- [ReadRowset method: File class](#)
- [SetFileLayout method: File class](#)
- [WriteRowset method: File class](#)
- [Understanding Record Class](#)

A record object, instantiated from the Record class, is a single instance of a data within a row and is based on a record definition. A record object consists of one to n fields.

- PeopleCode Developer's Guide: Understanding Data Buffer Access

WriteRowset method: File class

Syntax

```
WriteRowset(rowset [, Write_Data])
```

Description

The WriteRowset method is a file layout method. It writes the contents of a rowset object, *rowset*, to the output file associated with the file object executing this method. Regardless of whether the rowset contains just one or more than one transaction (level zero row), executing this method once writes the entire contents of the rowset to the output file.

Note

You must execute the SetFileLayout method from the file object before using WriteRowset, otherwise it returns False.

See [SetFileLayout method: File class](#).

WriteRowset writes a rowset to a file only if the data in the component buffer has changed. You must specify the *WriteData* parameter as True if you want the WriteRowset method to force the rowset to be written to the file even if the buffer has not been changed.

Note

When you're writing text to an XML file, special HTML characters, such as ampersands, lesser than or greater than symbols, and so on, are automatically converted to valid XML character string, such as &.

Parameters

Parameter	Description
<i>rowset</i>	Specify the name of an existing rowset object that was instantiated with the File class CreateRowset or ReadRowset method. You can use Rowset class methods such as Select and built-in functions such as GetLevel0 to populate the rowset with data before writing it to the file.
<i>WriteData</i>	Specify whether to write the rowset data to the file whether or not the data in the buffer has changed. This parameter takes a Boolean value: True, write the data to the buffer regardless, False, only write the data if changed. The default value for this parameter is False.

Returns

A Boolean value: True if the method succeeds, False otherwise.

Example

```
Local File &MYFILE;
Local Rowset &FILEROWSET;

&MYFILE = GetFile("c:\temp\EMP_CKLS.txt", "A", "UTF8", %FilePath_Absolute);
If &MYFILE.IsOpen Then
    If &MYFILE.SetFileLayout(FILELAYOUT.EMPL_CHECKLIST) Then
        &FILEROWSET = &MYFILE.CreateRowset();
        &FILEROWSET = GetLevel0();
        &MYFILE.WriteRowset(&FILEROWSET, True);
    Else
        /* file layout not found, do error processing */
    End-If;
Else
    /* file not opened, do error processing */
End-if;

&MYFILE.Close();
```

Considerations Using Fixed Length Files With Numeric Fields

All numeric fields are right-justified in when writing to fixed length files. In addition, zeros are padded to the right after the decimal point if required.

Considerations Using XML With File Definition Tags

File Definition Tags have no effect when importing data. However, generally, during export, the File Definition Tag is added at the starting and end of the data to create a valid XML file.

The one exception is when the file to which the data is being written during export has been opened in append mode. At that time, the file definition tag is not taken into consideration.

Related Topics

- [CreateRowset method: File class](#)
- [ReadRowset method: File class](#)
- [SetFileLayout method: File class](#)
- [WriteRecord method: File class](#)
- [ZeroExtend property: File class](#)
- [Understanding Record Class](#)
A record object, instantiated from the Record class, is a single instance of a data within a row and is based on a record definition. A record object consists of one to n fields.
- PeopleCode Developer's Guide: Understanding Data Buffer Access

WriteString method: File class

Syntax

`WriteString(string)`

Description

The `WriteString` method writes one string of text to the output file associated with the file object executing this method, without any newline character. Each string written extends the current line in the file.

You can start a new line by using the `WriteLine` method to write the last part of the current line. `WriteLine` always adds a newline character appropriate to the platform where the file is being written, whether you supply a character string of any length, or a null string.

Parameters

Parameter	Description
<i>string</i>	A string variable containing the text to be written.

Returns

None.

Example

The following example opens an empty file, writes two lines of text to it without a final newline, and closes it:

```
&MYFILE.Open("somefile.txt", "w");
&MYFILE.WriteString("This is the first ");
&MYFILE.WriteString("line in the file.");
&MYFILE.WriteLine("");
&MYFILE.WriteString("This second line is not terminated.");
&MYFILE.Close();
```

Related Topics

- [ReadLine method: File class](#)
- [WriteLine method: File class](#)
- [WriteRaw method: File class](#)

File Class Properties

In this section, we discuss each File Class property.

CurrentRecord property: File class

Description

This property is a file layout property. This property returns the current record as a string. The CurrentRecord property is used in combination with the SetFileId and ReadRowset methods and IsNewFileId property when reading files that contain data based on multiple file layouts.

If the ReadRowset method returns NULL, either the current record is a FileId record or the end of file has been reached. The IsNewFileId enables you to determine which. If it is a FileId, you can parse the string returned by CurrentRecord to determine the file layout definition to be used.

Note

SetFileId, CurrentRecord, and IsNewFileId don't apply to CSV and XML format input files. You can implement multiple file layouts only with fixed format files.

This property is read-only.

Example

```
&RECSTRING = &MYFILE.CurrentRecord;
```

Related Topics

- [SetFileId method: File class](#)
- [ReadRowset method: File class](#)
- [IsNewFileId property: File class](#)
- [Multiple File Layouts](#)

In the previous examples, the input file contained rowsets based on a single File Layout definition. However, PeopleTools provides the functionality to process input files containing rowsets that require several *different* File Layouts.

IgnoreInvalidId property: File class

Description

This property is a file layout property that's used in combination with the ReadRowset method. It returns a Boolean value that specifies whether file records with invalid FileIds are ignored. Each time ReadRowset is executed, it may encounter a file record that doesn't qualify as part of the rowset because its File ID isn't part of the current file layout, or because it occurs in an invalid position in the rowset. If IgnoreInvalidId is False, the PeopleCode program terminates; if IgnoreInvalidId is True, ReadRowset ignores the invalid file record. The default value is True.

This property is read/write.

Example

```
&MYFILE.IgnoreInvalidId = False;
```

Related Topics

- [ReadRowset method: File class](#)

IsError property: File class

Description

This property is a file layout property. It returns a Boolean value indicating whether a field error condition was generated by the last file layout method executed. If an error condition was generated, IsError returns True; if not, IsError returns False. The default value is False.

This property is read-only.

Example

The following example shows where IsError would be used:

```
&MYFILE.Open(&SOMENAME, "R");
&MYFILE.SetFileLayout(FILELAYOUT.SOMELAYOUT);
&MYROWSET = &MYFILE.ReadRowset();
If &MYFILE.IsError Then
    /* Examine the EditError property of each field in the rowset
       to find the one with the error, and respond accordingly */
End-If;
&MYFILE.Close();
```

Related Topics

- [Multiple File Layouts](#)
In the previous examples, the input file contained rowsets based on a single File Layout definition. However, PeopleTools provides the functionality to process input files containing rowsets that require several *different* File Layouts.

IsNewFileId property: File class

Description

This property is a file layout property. It returns a Boolean value indicating whether a FileId file record has been encountered. When the ReadRowset method reads a transaction from an input file, it examines the current file record following the transaction. If that file record is a FileId file record, IsNewFileId returns True; if not, IsNewFileId returns False.

IsNewFileId is used in combination with the SetFileId method and CurrentRecord property when reading files that require multiple file layouts.

Note

SetFileId, CurrentRecord, and IsNewFileId don't apply to CSV and XML format input files. You can use only fixed format files to implement multiple file layouts.

This property is read-only.

Example

```
&MYFILE.SetFileLayout(FILELAYOUT.SOMELAYOUT) then /* Set the first layout */
&MYFILE.SetFileId("999", 1); /* Set the FileId */
&SOMEROWSET = &MYFILE.ReadRowset(); /* Read the first rowset */
While &SOMEROWSET <> NULL
    If &MYFILE.IsNewFileId Then
        /* Examine &MYFILE.CurrentRecord for the next layout */
        /* Set the next layout */
        &MYFILE.SetFileId("999", 1); /* Set the FileId */
    End-If;
    /* Process the current &SOMEROWSET */
    &SOMEROWSET = &MYFILE.ReadRowset(); /* Read the next rowset */
End-While;
```

Related Topics

- [ReadRowset method: File class](#)
- [SetFileId method: File class](#)
- [CurrentRecord property: File class](#)

IsOpen property: File class

Description

This property returns a Boolean value indicating whether the file is open. If the file object is open, IsOpen returns True; if not, IsOpen returns False.

This property is read-only.

Example

The following example opens a file, writes a line to it, and closes it:

```
&MYFILE.Open("item.txt", "w");
If &MYFILE.IsOpen Then
    &MYFILE.WriteLine("Some text.");
    &MYFILE.Close();
End-If;
```

Name property: File class

Description

This property returns as a string the name of the external file. If no file is currently associated with the file object, Name returns a NULL string.

This property is read-only.

Example

```
&TMP = &MYFILE.Name;
```

TerminateLines property: File class

Description

Use the TerminateLines property to indicate whether all output data lines are to be terminated at the end of the defined data length. This property is a file layout property associated with fixed file layouts only.

This property takes a Boolean value: True to force output data lines to be terminated at the end of the defined data length; False to keep all lines all at the maximum of their own length or that of their children. The default value is false.

This property is read/write.

Example

```
If &FILE_CREATED = "N" Then
    &FILE_CREATED = "Y";
    &FILENAME = &MSGNAME | "_" | &PROCESS_INSTANCE | "_*.out";
    &FILE = GetFile(&FILENAME, "N", "UTF8");
    &FILE.SetFileLayout(@"FILELAYOUT." | &MSGNAME));
    &FILE.TerminateLines = True;
    &RS_LVL0 = &FILE.CreateRowset();
    &REC_MSG_LVL0 = &RS_LVL0(&ROWCNT0).GetRecord(1);
    If EO_BATLIB_AET.CREATE_FILE_FLG = "C" Then
        &STRING = "998" | &MSGNAME;
        &FILE.WriteLine(&STRING);
    End-If;
End-If;
```

UseSpaceForNull property: File class

Description

Use the UseSpaceForNull property to specify whether the WriteRowset method writes <qualifier> <qualifier> (<qualifier>-space-<qualifier>) for all the Null or empty character fields of a CSV-type file layout, or if the method writes <qualifier><qualifier> (<qualifier>-<qualifier>).

This property takes a Boolean value: false if WriteRowset writes <qualifier>-<qualifier>, true if WriteRowset writes <qualifier>-space-<qualifier>. The default is False.

Note

The state of this property has no effect on the behavior of the ReadRowset method. It also has no effect when the associated file layout is of type fixed or XML.

This property is read/write.

Example

```
Local File &LOGFILE;
Local File &FILE1;
```

```
Local File &FILE2;
Local Record &REC1;
Local SQL &SQL1;
Local Rowset &RS1;
Local Row &ROW1;

&LOGFILE = GetFile("C:\Temp\currency.log", "W", "UTF8", %FilePath_Absolute);
If (&LOGFILE = Null) Then
    Exit;
End-If;
If Not (&LOGFILE.SetFileLayout(FileLayout.CURRENCY_FL)) Then
    &LOGFILE.WriteLine("SetFileLayout() on LOGFILE failed.");
End-If;

&FILE1 = GetFile("C:\Temp\currency_nonspaced.csv", "W", "UTF8",
%FilePath_Absolute);
If (&FILE1 = Null) Then
    &LOGFILE.WriteLine("FATAL ERROR: GetFile() on non-spaced output file
failed.");
    &LOGFILE.Close();
    Exit;
End-If;
If Not (&FILE1.SetFileLayout(FileLayout.CURRENCY_FL)) Then
    &LOGFILE.WriteLine("FATAL ERROR: SetFileLayout() on non-spaced output
file⇒
failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    Exit;
End-If;

&FILE2 = GetFile("C:\Temp\currency_spaced.csv", "W", "UTF8",
%FilePath_Absolute);
If (&FILE2 = Null) Then
    &LOGFILE.WriteLine("FATAL ERROR: GetFile() on spaced output file
failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    Exit;
End-If;
If Not (&FILE2.SetFileLayout(FileLayout.CURRENCY_FL)) Then
    &LOGFILE.WriteLine("FATAL ERROR: SetFileLayout() on spaced output file⇒
failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    &FILE2.Close();
    Exit;
End-If;

&REC1 = CreateRecord(Record.CURRENCY_CD_TBL);
If (&REC1 = Null) Then
    &LOGFILE.WriteLine("FATAL ERROR: CreateRecord() on record failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    &FILE2.Close();
    Exit;
```



```
End-If;

&RS1 = CreateRowset(Record.CURRENCY_CD_TBL);
If (&RS1 = Null) Then
    &LOGFILE.WriteLine("FATAL ERROR: CreateRowset() on record failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    &FILE2.Close();
    Exit;
End-If;

&SQL1 = CreateSQL("%Selectall(:1)", &REC1);
If (&SQL1 = Null) Then
    &LOGFILE.WriteLine("FATAL ERROR: CreateSQL() failed.");
    &LOGFILE.Close();
    &FILE1.Close();
    &FILE2.Close();
    Exit;
End-If;

If (&FILE1.UseSpaceForNull) Then
    &LOGFILE.WriteLine("UseSpaceForNull is True on non-spaced output, by
default.");
Else
    &LOGFILE.WriteLine("UseSpaceForNull is False on non-spaced output, by⇒
default.");
End-If;
If (&FILE2.UseSpaceForNull) Then
    &LOGFILE.WriteLine("UseSpaceForNull is True on spaced output, by
default.");
Else
    &LOGFILE.WriteLine("UseSpaceForNull is False on spaced output, by
default.");
End-If;

&FILE1.UseSpaceForNull = True;
If (&FILE1.UseSpaceForNull) Then
    &LOGFILE.WriteLine("Setting UseSpaceForNull to True succeeded on non-
spaced⇒
output.");
Else
    &LOGFILE.WriteLine("Setting UseSpaceForNull to True failed on non-spaced⇒
output.");
End-If;
&FILE2.UseSpaceForNull = True;
If (&FILE2.UseSpaceForNull) Then
    &LOGFILE.WriteLine("Setting UseSpaceForNull to True succeeded on spaced⇒
output.");
Else
    &LOGFILE.WriteLine("Setting UseSpaceForNull to True failed on spaced
output.");
End-If;

&FILE1.UseSpaceForNull = False;
If (&FILE1.UseSpaceForNull) Then
    &LOGFILE.WriteLine("Setting UseSpaceForNull to False failed on non-spaced⇒
```

```

        output.");
    Else
        &LOGFILE.WriteLine("Setting UseSpaceForNull to False succeeded on non-
spaced⇒
        output.");
    End-If;
    &FILE2.UseSpaceForNull = False;
    If (&FILE2.UseSpaceForNull) Then
        &LOGFILE.WriteLine("Setting UseSpaceForNull to False failed on spaced
output.");
    Else
        &LOGFILE.WriteLine("Setting UseSpaceForNull to False succeeded on spaced⇒
        output.");
    End-If;

    &FILE1.UseSpaceForNull = False;
    &FILE2.UseSpaceForNull = True;
    &I = 1;
    While &SQL1.Fetch(&REC1)
        &ROW1 = &RS1.GetRow(1);
        &REC1.CopyFieldsTo(&ROW1.CURRENCY_CD_TBL);
        &FILE1.WriteRowset(&RS1, True);
        &FILE2.WriteRowset(&RS1, True);
        REM &LOGFILE.WriteLine("Got row " | String(&I));
        &I = &I + 1;
    End-While;

    &FILE1.Close();
    &FILE2.Close();
    &LOGFILE.Close();

```

Related Topics

- [WriteRowset method: File class](#)

ZeroExtend property: File class

Description

Use this property to specify whether or not the WriteRowset method zero-extends the value it writes for decimal fields for CSV or XML format files.

For example, for a decimal field defined as 6.3, the value 1.12 will be written as follows depending on the value of ZeroExtend:

True: 1.120

False: 1.12

This property takes a Boolean value: true if WriteRowset zero-extends the value it writes; false otherwise. The default value is true.

Note

This property has no effect in the case of a fixed-position format file. In addition, it does not affect the behavior of the ReadRowset method.

This property is read/write.

Related Topics

- [WriteRowset method: File class](#)

File Layout Examples

If your data is hierarchical in nature, or based on existing PeopleSoft records or pages, you want to use a File Layout definition for reading and writing your data, rather than doing it line by line (or field by field.)

For example, suppose you wanted to write all the information from a record to a file. You can use the WriteRecord method to write all the data from the record, instead of having to loop through every field, find the value, and write it to the file.

In addition, you could write all the information from a transaction (or several transactions) from a page to a file. Each transaction can be considered a *rowset*. A rowset can contain more than one record and is generally composed in a hierarchical structure. You could create a File Layout definition that has the same structure as the page (or component), and use the WriteRowset method. If you have a file that contains data in the correct format, you can use the ReadRowset method to read the data from the file to the page.

Each file layout is associated with a *format*. This format specifies the type of data in the files. You specify the format as part of the File Layout Properties. You can only specify one format for a file layout. Available formats are:

- FIXED (default)
- CSV
- XML

The file layout methods and properties use this information to handle each file type in a transparent manner. Generally, you don't need to do anything different based on file type. Any exceptions are noted in the documentation.

Note

Unlike other PeopleTools definitions, records and field are *copied* to a File Layout definition. There are no pointers. This means if you change a record definition (add or remove a field) you must change the File Layout definition also. The changes are not automatically propagated. This is why the documentation refers to these elements as file records, file fields, and so on, to show that they are no longer part of the original definition they were created from.

PeopleSoft recommends regenerating all file layout definitions after any upgrade, to avoid any corruption caused by changes to the database.


See Using Standalone Rowsets for more examples of writing from and reading to files using File Layout and standalone rowsets.

Related Topics

- PeopleCode Developer's Guide: Using Standalone Rowsets
- PeopleCode Developer's Guide: Understanding Data Buffer Access
- Application Designer Developer's Guide: Understanding File Layouts
- Application Designer Developer's Guide: Constructing File Layouts
- Application Designer Developer's Guide: Performing Data Interchanges

WriteRecord Example

In the following example, the File Layout definition is based on the record ABSENCE_HISTORY, and looks like this:

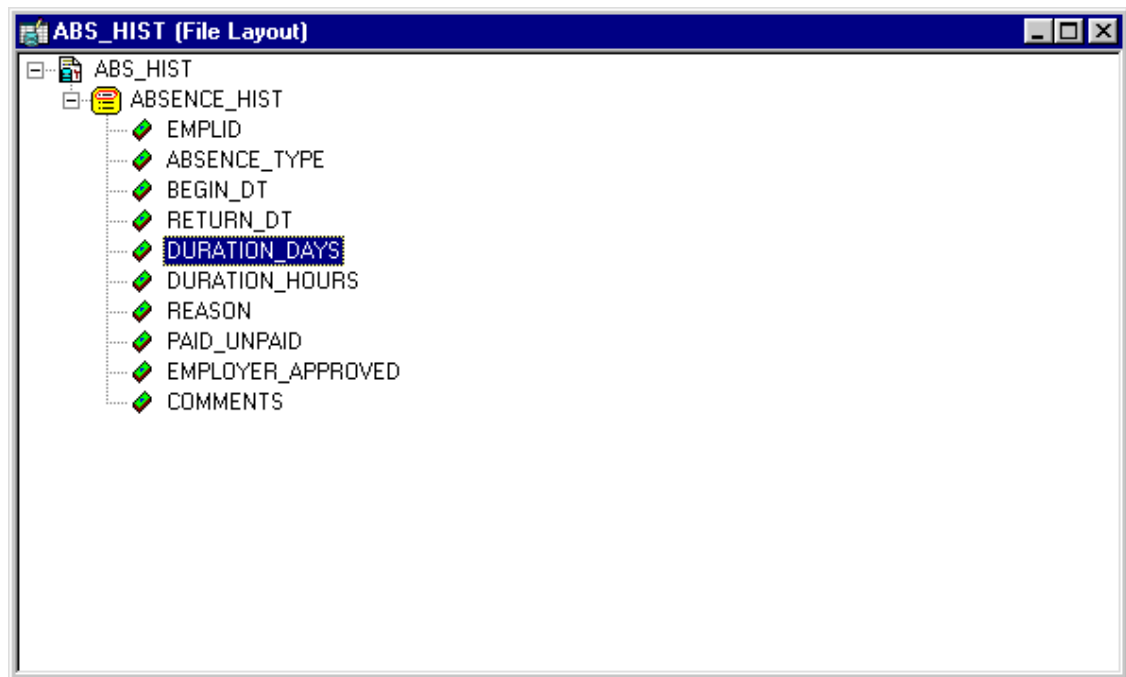

You should note the following about the using the WriteRecord method:

- Not all the fields in the File Layout definition and the record have to match. The WriteRecord method, like all File Layout methods, applies only to the *like-named* fields. If there are additional fields in the record or in the File Layout definition, they are ignored.
- The WriteRecord method writes only to *like-named* records. If you rename a record after you use it to create a File Layout definition, you must rename it to the exact same name in your File Layout. Because WriteRecord writes like-named records, the same file layout definition can contain more than one record.
- The WriteRecord method takes a *record object* as its parameter. A populated record object references a *single row* of data in the SQL table. This is why a SQL Fetch statement is used in a condition around the WriteRecord method. This fetches every row of data from the SQL table, then writes it to the file.

The following code writes the ABSENCE_HIST record to the file record.txt.

```

Local Record &RecLine;
Local File &MYFILE;
Local SQL &SQL2;

&MYFILE = GetFile("record.txt", "A", "UTF8");

If &MYFILE.IsOpen Then
  If &MYFILE.SetFileLayout(FileLayout.ABS_HIST) Then
    &RecLine = CreateRecord(RECORD.ABSENCE_HIST);
    &SQL2 = CreateSQL("%Selectall(:1)", &RecLine);
    While &SQL2.Fetch(&RecLine)
      &MYFILE.WriteRecord(&RecLine);
    End-While;
  Else
    /* do error processing -; filelayout not correct */
  End-If;
Else
  /* do error processing -; file not open */
End-If;

&MYFILE.Close();

```

If you wanted to write only changed records to the file, you could add the following code that is set in bold font:

```

While &SQL2.Fetch(&RecLine)
  If &RecLine.IsChanged Then
    &MYFILE.WriteRecord(&RecLine);End-If;
End-While;

```

The following is the first part of a sample data file created by the previous code. The field format is FIXED:

8001	VAC	09/12/1981	09/26/1981	14	0		P
Y							
8001	VAC	03/02/1983	03/07/1983	5	0		P
Y							
8001	VAC	08/26/1983	09/10/1983	13	0		P
Y							
8105	CNF	02/02/1995	??/??/	0	0		U
N							
8516	MAT	06/06/1986	08/01/1986	56	0		P
Y							
8516	SCK	08/06/1988	08/07/1988	1	0		P
Y							
8516	VAC	07/14/1987	07/28/1987	14	0		P
Y							
8553	JUR	12/12/1990	12/17/1990	5	0	Local Jury Duty	P
N							
8553	MAT	02/20/1992	10/01/1992	224	0	Maternity Leave	U
N							
8553	MAT	08/19/1994	03/01/1995	194	0	Maternity-2nd child	U
Y							

```

8553      PER 04/15/1993 04/19/1993 4    0      U
N⇒
  Personal Day
  required
8553      SCK 01/28/1987 01/30/1987 2    0    Hong Kong Flu      P
N
8553      SCK 08/02/1988 08/03/1988 1    0    Sick                  P
N
8553      SCK 09/12/1995 09/13/1995 1    0      P
N
8641      VAC 06/01/1988 06/15/1988 14   0      P
Y
8641      VAC 07/01/1989 07/15/1989 14   0      P
Y
G001      MAT 07/02/1991 09/28/1991 88   0    3-month Maternity leave  P
Y⇒
  Maternity will be paid as 80% of Claudia's current
  salary.

```

If a record in the File Layout definition has a File Record ID, each line in the file referencing this record is prefaced with this number. The File Record ID is not a field in the data itself. It is also referred to as the *rowid*. File Record IDs can be useful when the file you're producing refers to more than one record.

File Record IDs can be used only with File Layout definitions that have a type of FIXED. If a File Layout definition has only one level then File Record IDs can be omitted. But for File Layout definitions with more than one level, you *must* use File Record IDs.

The following is sample file, produced with the same code, but with a File Record ID of 101 added:

```

101 8001      VAC 09/12/1981 09/26/1981 14   0      P
Y
101 8001      VAC 03/02/1983 03/07/1983 5    0      P
Y
101 8001      VAC 08/26/1983 09/10/1983 13   0      P
Y
101 8105      CNF 02/02/1995 ??/??/      0    0      U
N
101 8516      MAT 06/06/1986 08/01/1986 56   0      P
Y
101 8516      SCK 08/06/1988 08/07/1988 1    0      P
Y
101 8516      VAC 07/14/1987 07/28/1987 14   0      P
Y
101 8553      JUR 12/12/1990 12/17/1990 5    0    Local Jury Duty      P
N
101 8553      MAT 02/20/1992 10/01/1992 224  0    Maternity Leave      U
N
101 8553      MAT 08/19/1994 03/01/1995 194  0    Maternity-2nd child  U
Y
101 8553      PER 04/15/1993 04/19/1993 4    0      U
N⇒
  Personal Day required
101 8553      SCK 01/28/1987 01/30/1987 2    0    Hong Kong Flu      P
N

```

101 8553	SCK	08/02/1988	08/03/1988	1	0	Sick	P
N							
101 8553	SCK	09/12/1995	09/13/1995	1	0		P
N							
101 8641	VAC	06/01/1988	06/15/1988	14	0		P
Y							
101 8641	VAC	07/01/1989	07/15/1989	14	0		P
Y							
101 G001	MAT	07/02/1991	09/28/1991	88	0	3-month Maternity leave	P
Y⇒							
Maternity will be paid as 80% of Claudia's current salary.							

Note

File positions start at 1, not 0. When you specify a File Record ID, make sure that the starting position of the Record ID is greater than 0.

ReadRecord Example

This following example uses the same File Layout definition as the previous example. The file format is CSV. The fields are separated by commas and delimited by double-quotes.

```
"8001", "VAC", "09/12/1981", "09/26/1981", "14", "0", "", "P", "Y", ""
"8001", "VAC", "03/02/1983", "03/07/1983", "5", "0", "", "P", "Y", ""
"8001", "VAC", "08/26/1983", "09/10/1983", "13", "0", "", "P", "Y", ""
"8105", "CNF", "02/02/1995", "??/??/", "0", "0", "", "U", "N", ""
"8516", "MAT", "06/06/1986", "08/01/1986", "56", "0", "", "P", "Y", ""
"8516", "SCK", "08/06/1988", "08/07/1988", "1", "0", "", "P", "Y", ""
"8516", "VAC", "07/14/1987", "07/28/1987", "14", "0", "", "P", "Y", ""

"8553", "JUR", "12/12/1990", "12/17/1990", "5", "0", "Local Jury
Duty", "P", "N", ""
"8553", "MAT", "02/20/1992", "10/01/1992", "224", "0", "Maternity
Leave", "U", "N", ""
"8553", "MAT", "08/19/1994", "03/01/1995", "194", "0", "Maternity-2nd
child", "U", "Y", ""
"8553", "PER", "04/15/1993", "04/19/1993", "4", "0", "", "U", "N", "Personal Day
required"
"8553", "SCK", "01/28/1987", "01/30/1987", "2", "0", "Hong Kong
Flu", "P", "N", ""
"8553", "SCK", "08/02/1988", "08/03/1988", "1", "0", "Sick", "P", "N", ""

"8553", "SCK", "09/12/1995", "09/13/1995", "1", "0", "", "P", "N", ""

"8641", "VAC", "06/01/1988", "06/15/1988", "14", "0", "", "P", "Y", ""
```

```
"8641", "VAC", "07/01/1989", "07/15/1989", "14", "0", "", "P", "Y", ""
"G001", "MAT", "07/02/1991", "09/28/1991", "88", "0", "3-month Maternity
leave", "P", "Y", ⇒
"Maternity will be paid as 80% of Claudia's current salary."
```

To read in the previous CSV file we use the following PeopleCode. It reads the file into a temporary record. First each line of the file is read into a string. The string is split into an array, with the value of each field in the array becoming an element in the array. The value of each field in the record is assigned a value from the array. After additional processing (for example, converting strings into dates or numbers, verifying data, and so on) the record can be inserted into the database. To insert the final data into the database, this code must be associated with a PeopleCode event that allows database updates, that is, `SavePreChange`, `WorkFlow`, `SavePostChange`, and so on. This code could also be used as part of an Application Engine program.

```
Local File &MYFILE;
Local Record &REC;
Local array of string &ARRAY;

&MYFILE = GetFile("c:\temp\vendor.txt", "R", "UTF8", %FilePath_Absolute);
&REC = CreateRecord(RECORD.ABS_HIST_TEST);
&ARRAY = CreateArrayRept("", 0);

If &MYFILE.IsOpen Then
    If &MYFILE.SetFileLayout(FILELAYOUT.ABS_HIST) Then
        While &MYFILE.ReadLine(&STRING);
            &ARRAY = Split(&STRING, ",");
            For &I = 1 To &REC.FieldCount
                &REC.GetField(&I).Value = &ARRAY[&I];
            End-For;
            /* do additional processing here for converting values */
            &REC.Insert();
        End-While;
    Else
        /* do error processing - filelayout not correct */
    End-If;
Else
    /* do error processing - file not open */
End-If;


&MYFILE.Close();
```

Note


You can't read a file that contains a thousands separator for numeric fields. You must strip out the separator before you try to read in the file.

WriteRowset Example

In the following example, the File Layout definition is based on the component `EMPL_CHECKLIST`, and looks like this:

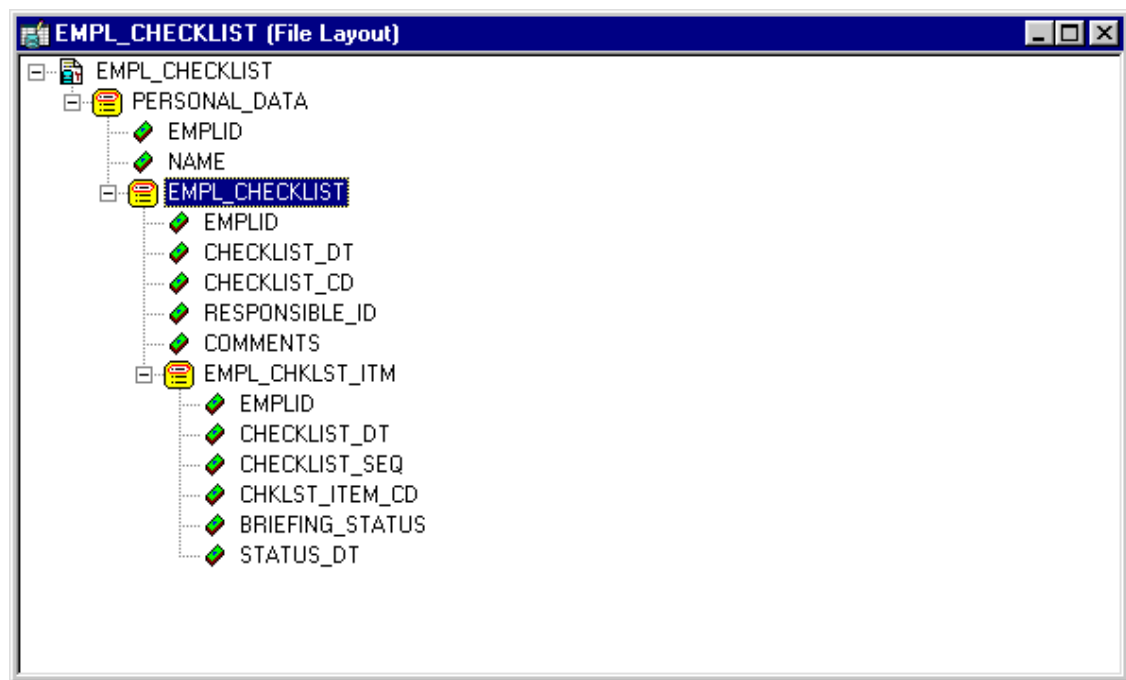

Here's the structure of the component EMPLOYEE_CHECKLIST:

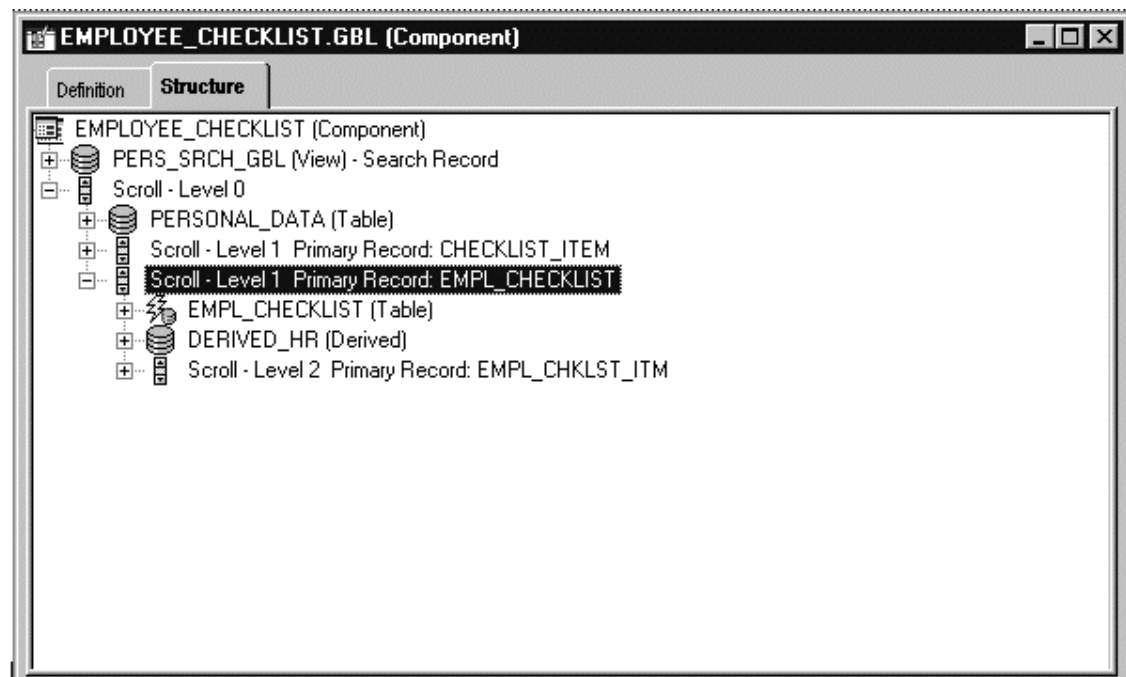

Note that:

- Every *field* in the two structures don't have to match (that is, every field or record that's in the file layout doesn't have to be in the component, and vice versa.)
- The two *structures* must be the same. That is, if the component has PERSONAL_DATA at level zero, and EMPL_CHECKLIST at level one, the file layout must have the same hierarchy.

The following example uses the previous File Layout definition to copy data from the EMPL_CHECKLIST page into a file.

The CreateRowset function creates an empty rowset that has the structure of the file layout definition. The GetRowset function is used to get all the data from the component and copy it into the rowset. The GetLevel0 function copies all *like-named* fields to *like-named* records. The WriteRowset method writes all the component data to the file. Because this code runs on the server, an absolute file path is used.

See PeopleCode Language Reference: GetRowset function.

Example

The following is the PeopleCode for this example.

```
Local File &MYFILE;
Local Rowset &FILEROWSET;

&MYFILE = GetFile("c:\temp\EMP_CKLS.txt", "A", "UTF8", %FilePath_Absolute);
If &MYFILE.IsOpen Then
    If &MYFILE.SetFileLayout(FILELAYOUT.EMPL_CHECKLIST) Then
        &FILEROWSET = &MYFILE.CreateRowset();
        &FILEROWSET = GetLevel0();
        &MYFILE.WriteRowset(&FILEROWSET, True);
    Else
        /* file layout not found, do error processing */
    End-If;
Else
    /* file not opened, do error processing */
End-if;

&MYFILE.Close();
```

The following is a sample data file created by the previous code:

```
8113      Frumman,Wolfgang
          08/06/1999 000001      8219      Going to London office
          100      000015 I 08/06/1999
          200      000030 I 08/06/1999
          300      000009 I 08/06/1999
          400      000001 I 08/06/1999
          500      000011 I 08/06/1999
          600      000002 I 08/06/1999
          700      000021 I 08/06/1999
          800      000024 I 08/06/1999
          900      000004 I 08/06/1999
          1000     000006 I 08/06/1999
          09/06/1999 000004      7707      What to do after he
arrives
          100      000022 I 08/06/1999
          200      000008 I 08/06/1999
          300      000018 I 08/06/1999
          400      000019 I 08/06/1999
8101      Penrose,Steven
          07/06/1999 000006      8229      New hire
          1        000033 I 08/06/1999
```

```

2      000034 I 08/06/1999
3      000035 I 08/06/1999
4      000036 I 08/06/1999
5      000037 I 08/06/1999
6      000038 I 08/06/1999
7      000039 I 08/06/1999
8      000040 I 08/06/1999
9      000041 I 08/06/1999
10     000042 I 08/06/1999

```

When you create the File Layout definition, you can choose for each field whether to inherit a value from a higher level record field. If a value is inherited, it is written only *once* to the file, the first time it's encountered.

In the previous data example, there are three records: PERSONAL_DATA, EMPL_CHECKLIST, and EMPL_CHKLST_ITM. The field EMPLID is on all three records, but is written to the file only the first time a new value is encountered. So, the value for EMPLID is inherited by EMPL_CHECKLIST, and the value for EMPL_CHKLST_ITM is inherited from PERSONAL_DATA. The field CHECKLIST_DT is on EMPL_CHECKLIST and EMPL_CHKLST_ITM. However, the field value appears only once, in the parent record, and not in the child record.

If a record in the File Layout definition has a File Record ID, each line in the file referencing this record will be prefaced with this number. The File Record ID is not a field in the data itself. It is also referred to as the *rowid*. File Record IDs can be useful when the file being created refers to more than one record. File Record IDs can be used only with File Layout definitions that have a type of FIXED.

The following is sample file, produced with the same code, but with a File Record IDs added to all the records. 001 was added to the first level, 002 to the second, and 003 to the third.

```

001 8113
Frumman,Wolfgang
002      08/06/1999      000001 8219      Going to London
office
003      100      000015 I
10/13/1999
003      200      000030 I
10/13/1999
003      300      000009 I
10/13/1999
003      400      000001 I
10/13/1999
003      500      000011 I
10/13/1999
003      600      000002 I
10/13/1999
003      700      000021 I
10/13/1999
003      800      000024 I
10/13/1999
003      900      000004 I
10/13/1999
003      1000      000006 I
10/13/1999
002      09/06/1999      000004 7707      What to do after he

```

```

arrives
003                100    000022 I
10/13/1999
003                200    000008 I
10/13/1999
003                300    000018 I
10/13/1999
003                400    000019 I
10/13/1999
001 8101
Penrose, Steven
002      10/13/1999    000006 8229      New
hire
003                1      000033 I
10/13/1999
003                2      000034 I
10/13/1999
003                3      000035 I
10/13/1999
003                4      000036 I
10/13/1999
003                5      000037 I
10/13/1999
003                6      000038 I
10/13/1999
003                7      000039 I
10/13/1999
003                8      000040 I
10/13/1999
003                9      000041 I
10/13/1999
003                10     000042 I 10/13/1999

```

ReadRowset Example

The following program reads all the rowsets from a file and updates a work scroll with that data. The work scroll isn't hidden on the page: it's created in the Component buffer from existing records using CreateRowset. The structure of the work scroll and the file layout are identical: that is, they're composed of two records, and the names of the records in the file layout are exactly the same as the names of the record definitions.

```

Local File &CHARTINPUT_F;
Local Rowset &INPUT_ROWSET, &TEMP_RS, &WORK_DATA;
Local Record &WRK_DATA;

&filename = "c:\temp\test.txt";
If FileExists(&filename, %FilePath_Absolute) Then
    &CHARTINPUT_F = GetFile(&filename, "R", "UTF8", %FilePath_Absolute);
Else
    Exit;
End-If;

&CHARTINPUT_F.SetFileLayout(FileLayout.CHART_INFO);

/* Create rowset to be read into

```

NOTE that you have to start at LOWEST level of rowset */

```
&TEMP_RS = CreateRowset(RECORD.CHART_ITEM);
&WORK_DATA = CreateRowset(RECORD.CHART_DATA, &TEMP_RS);
&INPUT_ROWSET = CreateRowset(RECORD.CHART, &WORK_DATA);

While &INPUT_ROWSET <> Null
    &INPUT_ROWSET = &CHARTINPUT_F.ReadRowset();
    &INPUT_ROWSET.CopyTo(&WORK_DATA);
    /* do processing -- Though file may contain more than one level zero
    Component processor only allows one level zero at a time */
End-While;
```

File Rowset Considerations

The following are considerations for when you use rowsets with files.

- Although you can create a File Layout definition with more than four levels of hierarchy, a rowset created from Component buffer data can contain only four levels (level zero through 3). Any additional levels of data are ignored.
- ReadRowset populates the rowset with one transaction from the file. (A transaction is considered to be one instance of level zero data contained in a file record, plus all of its subordinate data.) WriteRowset writes one transaction to a file.

Application Engine Example

You can also use PeopleCode in an Application Engine program to either write to or read from files. This example isn't a proper Application Engine program: it contains the PeopleCode only for opening and reading from a file. However, it's included here as starting point for your own Application Engine programs. Here is the Application Engine program:

The screenshot shows the 'Definition' tab of the 'FILE_TO_TBL (App Engine Program)' window. It displays a hierarchical structure with sections and steps.

Section	Step	Action
MAIN	MAIN description	MAIN.GBL.(base).1900-01-01
	Step01	Step01 description
		Commit After: Frequency: On Error:
		Default: Abort: ☒ Active
	PeopleCode	PeopleCode description
		On Return: Skip Step

Here is the PeopleCode in the step 1.

```
Local File &FILE;
Local Record &REC;
Local Rowset &FRS;

&FILE = GetFile("TEST.txt", "R", "UTF8");
```

```

&REC = CreateRecord(Record.QEPC_FILE_REC);
&SQL = CreateSQL("%Insert(:1)");

If Not &FILE.IsOpen Then
    Error ("TEST: failed file open");
Else
    If Not &FILE.SetFileLayout(FileLayout.QEPC_FILE_REC) Then
        Error ("TEST: failed SetFilelayout");
    Else
        &FRS = &FILE.ReadRowset();
        While &FRS <> Null
            &FRS.GetRow(1).QEPC_FILE_REC.CopyFieldsTo(&REC);
            &SQL.execute(&REC);
            &FRS = &FILE.ReadRowset();
        End-While;
    End-If;
    &FILE.Close();
End-If;

```

The example Application Engine program reads the following CSV file:


```

"TEST2", "1ST", "01/01/1901", 10
"TEST2", "2ND", "01/01/1902", 20
"TEST2", "3RD", "01/01/1903", 30
"TEST2", "4TH", "01/01/1904", 40


```

Note that the last field has no qualifier.

The File Layout used to read this record has the following form:

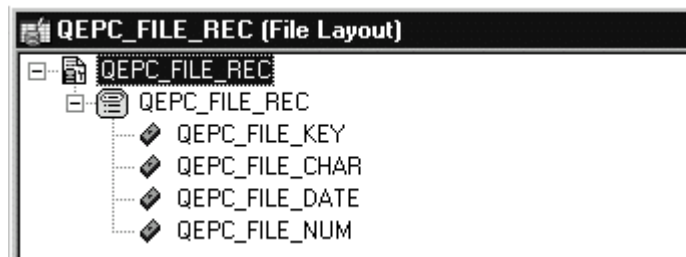

The properties for the QEPC_FILE_REC File Layout are as follows:

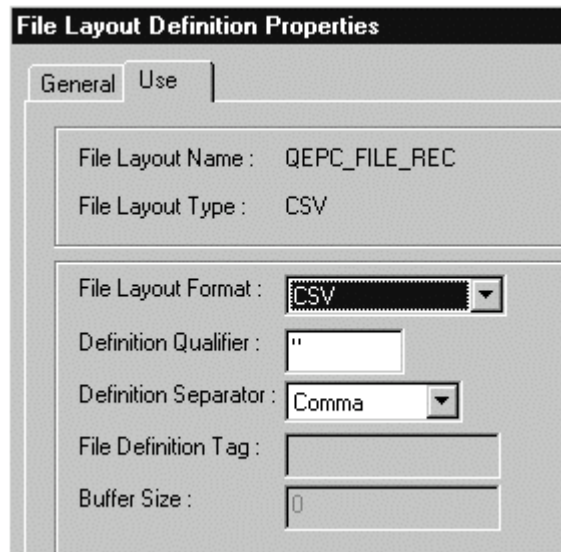

The screenshot shows a dialog box titled "File Layout Definition Properties". It has two tabs: "General" and "Use". The "General" tab is selected. Inside the dialog, there are several fields and dropdown menus:

- File Layout Name :** QEPC_FILE_REC
- File Layout Type :** CSV
- File Layout Format :** A dropdown menu with "CSV" selected.
- Definition Qualifier :** A text box containing double quotes ("").
- Definition Separator :** A dropdown menu with "Comma" selected.
- File Definition Tag :** An empty text box.
- Buffer Size :** A text box containing the number 0.

Note that the Definition Qualifier is double-quotes ("), while the separator is a comma.

Remember, the last field didn't have a qualifier. To account for that, the field properties for this field must be edited, and a blank must be put in the Field Qualifier property.

The following image illustrates the way properties can be defined for the fields in the File layout.

File Layout Field Properties

Use

Field Inheritance
File Layout Name : QEPC_FILE_REC
File Layout Type : CSV

Sequence No : 4
Field Name : QEPC_FILE_NUM ☐ Suppress
Field Type : Number
Decimal Pos: 2
Field Length : 7
Start Position : 41
Field Qualifier :
Field Tag : QEPC_FILE_NUM
Strip Characters : ☐ Trim Spaces
Field Description:
Propagate: <<< 0 >>>
Field Inheritance
Record Name : DO-NOT-INHERIT
Field Name :
Default Value :
OK Cancel

See Application Engine: Application Engine Fundamentals

Multiple File Layouts

In the previous examples, the input file contained rowsets based on a single File Layout definition. However, PeopleTools provides the functionality to process input files containing rowsets that require several *different* File Layouts.

Note

You can use only fixed format files to implement multiple file layouts.

See the SetFileId method for details about handling multiple file layouts.

In this section, we discuss how to:

- Read multiple file layouts.
- Write multiple file layouts.

See [SetFileId method: File class](#).

Reading Multiple File Layouts

If your input file contains data based on more than one File Layout, it must contain an indicator, called a FileId that specifies:

- When a different File Layout definition should be used.
- Which File Layout definition should be used.

The FileId must be specified on a separate line and must precede every rowset that requires a layout different from the previous rowset. It isn't considered part of the rowset.

In the following example, the file contains two FileId lines; they use a file record ID that distinguishes them from the rowset data—in this case, "999".

```
999 PRODUCT /* The following rowset uses the PRODUCT layout */
001 /* Level 0 record data */
101 /* level 1 record data */
201 /* Level 2 record data */
201 /* Level 2 record data */
999 ORDER /* The following two rowsets use the ORDER layout */
001 /* Level 0 record data */
111 /* Level 1 record data */
111 /* Level 1 record data */
001 /* Level 0 record data */
111 /* Level 1 record data */
111 /* Level 1 record data */
```

The FileId can contain any information you want that indicates which file layout to use; the "PRODUCT" and "ORDER" fields shown are just examples.

To read this file, you should do the following in your program:

1. Use the SetFileId method to specify the file record ID value.
2. Use the ReadRowset method to read the data.
3. Check if the rowset is NULL.

NULL indicates you've reached either the end of the file or a new rowset.

4. Use the IsNewFileId property to check if the next line is a FileId file record (line).
 - If IsNewFileId is False, you've reached the end of the file.
 - If IsNewFileId is True, use the CurrentRecord property to determine which File Layout to use next.

The following example reads rowsets from a file. When it finds a new rowset (indicated by &IsNewFileId returning True) the value of &CurrentRecord is passed to a function that reads and evaluates the line, then returns the name of the new file layout. (The code for the function FindFileId is included at the start of the example.)

```
Local File &MYFILE;
Local Rowset &rsFile;
Local Record &rSomeRec1, &rSomeRec2;
```

```

Local SQL &SQL1;

Function FindFileID(&CurrentRecord As string) Returns string ;
    Evaluate RTrim(Substring(&CurrentRecord, 5, 50))
    When "SOME_REC1"
        &FILELAYOUT = "SOME_REC1";
    When "SOME_REC2"
        &FILELAYOUT = "SOME_REC2";
    End-Evaluate;
    Return &FILELAYOUT;
End-Function;

&rSomeRec1 = CreateRecord(Record.SOME_REC1);
&rSomeRec2 = CreateRecord(Record.SOME_REC2);
&SQL1 = CreateSQL("%Insert(:1)");
&MYFILE = GetFile("c:\temp\MULTI_FILE.out", "R", "UTF8", %FilePath_Absolute);

rem Set temporary first file layout;
&MYFILE.SetFileLayout(FileLayout.SOME_REC1);
&MYFILE.SetFileId("999", 1);

rem Read rowset to find actual first file ID;
&rsFile = &MYFILE.ReadRowset();
&CurrentRecord = &MYFILE.CurrentRecord;
&IsNewFileID = &MYFILE.IsNewFileId;
If &MYFILE.IsNewFileId Then
    &FILELAYOUT = FindFileID(&CurrentRecord);
    &MYFILE.SetFileLayout(@"FileLayout." | &FILELAYOUT));
    &MYFILE.SetFileId("999", 1);
End-If;

rem Read first 'real' rowset;
&rsFile = &MYFILE.ReadRowset();
&CurrentRecord = &MYFILE.CurrentRecord;
&IsNewFileID = &MYFILE.IsNewFileId;
While &rsFile <> Null Or
    &IsNewFileID
    If &MYFILE.IsNewFileId Then
        &FILELAYOUT = FindFileID(&CurrentRecord);
        &MYFILE.SetFileLayout(@"FileLayout." | &FILELAYOUT));
        &MYFILE.SetFileId("999", 1);
        If &IsNewFileID Then
            &rsFile = &MYFILE.ReadRowset();
            &CurrentRecord = &MYFILE.CurrentRecord;
            &IsNewFileID = &MYFILE.IsNewFileId;
        End-If;
    End-If;
    Evaluate &FILELAYOUT

    When "SOME_REC1"
        &rsFile(1).SOME_REC1.CopyFieldsTo(&rSomeRec1);
        &rSomeRec1.ExecuteEdits(%Edit_Required);
        If Not &rSomeRec1.IsEditError Then
            &SQL1.Execute(&rSomeRec1);
        End-If;
        Break;

```

```

When "SOME_REC2"
    &rsFile(1).SOME_REC2.CopyFieldsTo(&rSomeRec2);
    &rSomeRec2.ExecuteEdits(%Edit_Required);
    If Not &rSomeRec2.IsEditError Then
        &SQL1.Execute(&rSomeRec2);
    End-If;
End-Evaluate;
&rsFile = &MYFILE.ReadRowset();
&CurrentRecord = &MYFILE.CurrentRecord;
&IsNewFileID = &MYFILE.IsNewFileId;
End-While;

&MYFILE.Close();

```

See [SetFileId method: File class](#), [ReadRowset method: File class](#), [IsNewFileId property: File class](#).

Writing Multiple File Layouts

If you're writing files that contain data based on more than one File Layout definition, consider the following points:

- If the file is going to a third-party vendor, you should work with the third-party to determine what their requirements are for specifying the different data formats.
- If the file is going to be used by another PeopleSoft system, you must add the FileId between each rowset that requires a different layout. FileId file records are *not* part of any rowset. They should be designed so they won't be mistaken for part of a rowset. You can create and write them to the file in many ways. The following are suggestions:
 - Build each line as a string, using any of the built-in string manipulation functions, then write them to the file using the File class WriteLine or WriteString methods.
 - Design a file layout consisting of a single file record definition for the FileId file records, then build the records using Record Class methods and functions, and write them to the file using the WriteRecord method.

The following code example writes each record from the level one scroll on a page to the file using a different File Layout. Between each WriteRowset the File ID file record is written to the file, describing the new File Layout being used.

```

Local File &MYFILE;
Local Rowset &FILEROWSET;
Local Record &REC1, &REC2;
Local SQL &SQL;

&MYFILE = GetFile("c:\temp\Records.txt", "w", "UTF8", %FilePath_Absolute);
If &MYFILE.IsOpen Then
    If &MYFILE.SetFileLayout(FileLayout.TREE_LEVEL) Then
        &REC1 = CreateRecord(Record.PSTREELEVEL);
        &FILEROWSET = &MYFILE.CreateRowset();
        &SQL = CreateSQL("%Selectall(:1)", &REC1);
        /* write first File ID to file */
        &MYFILE.WriteLine("999 FILE LAYOUT 1");
        While &SQL.Fetch(&REC1)
            &REC1.CopyFieldsTo(&FILEROWSET.GetRow(1).PSTREELEVEL);
            &MYFILE.WriteRowset(&FILEROWSET, True);
        End-While;
    End-If;
End-If;

```

```
        End-While;
    Else
        /* file layout not found, do error processing */
    End-If;
    If &MYFILE.SetFileLayout(FileLayout.TREE_USERLEVEL) Then
        &REC2 = CreateRecord(Record.TREE_LEVEL_TBL);
        &FILEROWSET = &MYFILE.CreateRowset();
        &SQL = CreateSQL("%Selectall(:1)", &REC2);
        /* write second File ID to file */
        &MYFILE.WriteLine("999 FILE LAYOUT 2");
        While &SQL.Fetch(&REC2)
            &REC2.CopyFieldsTo(&FILEROWSET.GetRow(1).TREE_LEVEL_TBL);
            &MYFILE.WriteRowset(&FILEROWSET);
        End-While;
    Else
        /* file layout not found, do error processing */
    End-If;
    Else
        /* file not opened, do error processing */
    End-If;
    &MYFILE.Close();
```

See [WriteLine method: File class](#), [WriteString method: File class](#), [WriteRecord method: File class](#).

See [Understanding Record Class](#).

Fluid Page Utilities Classes

Understanding the Fluid Page Utilities Classes

The fluid page utilities classes of the PT_PAGE_UTILS application package provide tools to manage certain aspects of your fluid applications:

- PT_PAGE_UTILS:Banner — Use the Banner class to control items in the fluid banner including the title as well as visibility of some of the items that appear in Actions.
- PT_PAGE_UTILS:DynamicScreenReader — Use the SuppressCommonActionItem property of the DynamicScreenReader class to hide the Enable Screen Reader Mode link in the Actions menu for the life of the current component.
- PT_PAGE_UTILS:PanelController — Use the PanelController class to inquire on and update the modes and visibility of the Side Page 1 (left panel) and Side Page 2 (right panel).
- PT_PAGE_UTILS:Utils — The Utils class provides general utility methods for working with viewport settings, displaying confirmation messages in the banner, and working with toggle buttons.

Related Topics

- [Banner Class](#)
Use the PT_PAGE_UTILS:Banner class to control items in the fluid banner including the title as well as visibility of some of the items that appear in Actions.
- [DynamicScreenReader Class Properties](#)
In this section, the DynamicScreenReader class properties are presented in alphabetical order.
- [PanelController Class](#)
Use the PanelController class to inquire on and update the modes and visibility of the Side Page 1 (left panel) and Side Page 2 (right panel) in fluid components. Because this class spawns Panel objects for each side panel, you do not need to instantiate Panel objects directly.
- [Utils Class](#)
Use the PT_PAGE_UTILS:Utils class in fluid component PostBuild, page Activate, or later events.

Banner Class

Use the PT_PAGE_UTILS:Banner class to control items in the fluid banner including the title as well as visibility of some of the items that appear in Actions.

The PeopleTools-delivered fluid header page (PT_HEADERPAGE) performs operations equivalent to the methods of the PT_PAGE_UTILS:Banner class. Therefore, use the PT_PAGE_UTILS:Banner class in Standard Page type pages only in page Activate (or later events) to avoid having your changes overwritten. In addition to page Activate events, certain

methods such as confirmation messages could be associated with a user action such as a `FieldChange` event, for example.

Many methods of this class are ignored and have no effect if the component is rendered in a context that does not allow access to the fluid banner and Actions such as:

- In an activity guide.
- In a modal window or in a modeless window.
- When executing as a grouplet request.
- When executing as a component interface.

Related Topics

- PeopleCode Language Reference: `IsGroupletRequest` function

Banner Class Methods

In this section, the Banner class methods are presented in alphabetical order.

Related Topics

- PeopleCode Language Reference: `IsGroupletRequest` function

ClearConfirmation method: Banner class

Syntax

```
ClearConfirmation()
```

Description

Use the `ClearConfirmation` method to dismiss the transient confirmation message (to ensure that the message is dismissed even if auto dismiss is disabled through the user's preference settings).

Parameters

None

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).ClearConfirmation();
```

Related Topics

- [SetConfirmationMessage method: Banner class](#)
- [ClearConfirmationMessage method: Utils class](#)
- [CloseConfirmationMessage method: Utils class](#)
- [SetConfirmationMessage method: Utils class](#)

GetFixedPageTitleField method: Banner class

Syntax

```
GetFixedPageTitleField()
```

Description

Use the GetFixedPageTitleField method to instantiate a Field object representing the page title found in the fluid banner for a component currently executing in a search context.

Important

Use this method only when you have implemented a custom search page for this component. This method is not needed when the standard PeopleTools-delivered search page is used.

Parameters

None

Returns

A Field object.

Example

```
Local Field &oSearchPageTitle = (create  
PT_PAGE_UTILS:Banner()).GetFixedPageTitleField();
```

GetPageTitleField method: Banner class

Syntax

```
GetPageTitleField()
```

Description

Use the GetPageTitleField method to instantiate a Field object representing the page title found in the fluid banner (if available).

This method is ignored and has no effect if the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

This method typically is not used, but is available if additional manipulation of the page title field is required.

Parameters

None

Returns

A Field object.

Example

```
Local Field &oTitle = (create PT_PAGE_UTILS:Banner()).GetPageTitleField();
```

SetConfirmationMessage method: Banner class

Syntax

```
SetConfirmationMessage(MessageText)
```

Description

Use the SetConfirmationMessage method to display a typically transient confirmation message below the fluid banner.

Parameters

Parameter	Description
<i>MessageText</i>	Specifies the message text as a String value.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetConfirmationMessage("Your operation was  
successful.");
```

Related Topics

- [ClearConfirmation method: Banner class](#)
- [ClearConfirmationMessage method: Utils class](#)
- [CloseConfirmationMessage method: Utils class](#)
- [SetConfirmationMessage method: Utils class](#)

SetContextMenuLabel method: Banner class

Syntax

```
SetContextMenuLabel(Label)
```

Description

Use the SetContextMenuLabel method to set the label for the context menu (More Actions) in the fluid banner. The default label is More Actions.

This method is ignored and has no effect in any of the following conditions:

- If the component is rendered in a context that does not allow access to the fluid banner (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).
- Context menu (More Actions) is not supported on small form factor devices.

Parameters

Parameter	Description
<i>Label</i>	Specifies the label of the context menu (More Actions) as a String value.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetContextMenuLabel("New Label");
```

SetFixedPageTitle method: Banner class

Syntax

```
SetFixedPageTitle(Title)
```

Description

Use the SetFixedPageTitle method to set the page title while in search context. Use this method on a custom search page only.

Parameters

Parameter	Description
<i>Title</i>	Specifies the page title as a String value.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetFixedPageTitle("My Search Page Title");
```

SetPageTitle method: Banner class

Syntax

```
SetPageTitle(Title)
```

Description

Use the SetPageTitle method to set the page title in the fluid banner.

This method is ignored and has no effect if the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Parameters

Parameter	Description
<i>Title</i>	Specifies the page title as a String value.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetPageTitle("My Title");
```

SetVisibilityActionList method: Banner class

Syntax

```
SetVisibilityActionList(Visible)
```

Description

Use the SetVisibilityActionList method to set the visibility of the Actions menu in the fluid banner. This method is ignored and has no effect if the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Actions menu is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityActionList( False);
```

SetVisibilityAddto method: Banner class

Syntax

```
SetVisibilityAddto(Visible)
```

Description

Use the SetVisibilityAddto method to set the visibility of the Add To feature in the fluid banner (or Actions menu). This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Add To feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityAddto( False);
```

SetVisibilityContextMenu method: Banner class

Syntax

```
SetVisibilityContextMenu(Visible)
```

Description

Use the `SetVisibilityContextMenu` method to set the visibility of the context menu (More Actions) feature in the fluid banner.

This method is ignored and has no effect in any of the following conditions:

- If the component is rendered in a context that does not allow access to the fluid banner (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).
- Context menu (More Actions) is not supported on small form factor devices.

Note

Because the `PT_HEADERPAGE` page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the context menu (More Actions) feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityContextMenu( False);
```

SetVisibilityHelp method: Banner class

Syntax

```
SetVisibilityHelp(Visible)
```

Description

Use the SetVisibilityHelp method to set the visibility of the Help feature in the Actions menu. This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If Help is not configured on this system.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Help feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityHelp( False);
```

SetVisibilityHome method: Banner class

Syntax

```
SetVisibilityHome(Visible)
```

Description

Use the `SetVisibilityHome` method to set the visibility of the Home feature in the fluid banner (or Actions menu). This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the `PT_HEADERPAGE` page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Home feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityHome( False);
```

SetVisibilityMyPreferences method: Banner class

Syntax

```
SetVisibilityMyPreferences(Visible)
```

Description

Use the `SetVisibilityMyPreferences` method to set the visibility of the My Preferences link in the Actions menu. This method is ignored and has no effect in any of the following conditions:

- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the My Preferences link is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityMyPreferences( False);
```

SetVisibilityNavbar method: Banner class

Syntax

```
SetVisibilityNavbar(Visible)
```

Description

Use the SetVisibilityNavbar method to set the visibility of the NavBar feature in the fluid banner (or Actions menu). This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the NavBar feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityNavbar( False);
```

SetVisibilityNewWindow method: Banner class

Syntax

```
SetVisibilityNewWindow(Visible)
```

Description

Use the SetVisibilityNewWindow method to set the visibility of the New Window feature in the Actions menu. This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the New Window feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityNewWindow( False);
```

SetVisibilityNotifications method: Banner class

Syntax

```
SetVisibilityNotifications(Visible)
```

Description

Use the SetVisibilityNotifications method to set the visibility of the Notifications feature in the fluid banner (or Actions menu). This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Notifications feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityNotifications( False);
```

SetVisibilityNotify method: Banner class

Syntax

```
SetVisibilityNotify(Visible)
```

Description

Use the SetVisibilityNotify method to set the visibility of the Notify feature in the Actions menu. This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the user does not have permission to perform the action or access the target.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Notify feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityNotify( False);
```

Related Topics

- Fluid User Interface Developer's Guide: Setting Properties on the Fluid Tab

SetVisibilityQAB method: Banner class

Syntax

```
SetVisibilityQAB(Visible)
```

Description

Use the `SetVisibilityQAB` method to set the visibility of the QAB feature in the fluid banner. This method is ignored and has no effect if the component is rendered in a context that does not allow access to the fluid banner (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the `PT_HEADERPAGE` page also performs an operation equivalent to this method in its page `Activate` event, you should invoke this method after that event to ensure that your changes are not overwritten.

Note

The `SetVisibilityQAB` method does not control the visibility when QAB is configured to display as a panel within a homepage.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the QAB feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilityQAB( False);
```

SetVisibilitySearch method: Banner class

Syntax

```
SetVisibilitySearch(Visible)
```

Description

Use the `SetVisibilitySearch` method to set the visibility of the Search feature in the fluid banner (or Actions menu). This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If Search is not configured on this system.
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless

window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Search feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilitySearch( False);
```

SetVisibilitySignout method: Banner class

Syntax

```
SetVisibilitySignout(Visible)
```

Description

Use the SetVisibilitySignout method to set the visibility of the Sign Out feature in the Actions menu. This method is ignored and has no effect in any of the following conditions:

- If the feature is disabled in the component's properties (Fluid tab).
- If the component is rendered in a context that does not allow access to the fluid banner and Actions menu (that is, in an activity guide, in a modal window or in a modeless window, when executing as a grouplet request, or when executing as a component interface).

Note

Because the PT_HEADERPAGE page also performs an operation equivalent to this method in its page Activate event, you should invoke this method after that event to ensure that your changes are not overwritten.

Parameters

Parameter	Description
<i>Visible</i>	Specifies a Boolean value indicating whether the Sign Out feature is visible.

Returns

None

Example

```
(create PT_PAGE_UTILS:Banner()).SetVisibilitySignout( False);
```

Banner Class Properties

In this section, the Banner class properties are presented in alphabetical order.

isGuidedDisplay property: Banner class

Description

Use the isGuidedDisplay property to return a Boolean value indicating whether the master/detail or activity guide wrapper is in guided mode (that is, Previous and Next are displayed in the fluid banner).

This property is read-only.

Note

If search results are to be displayed in the master/detail format (as set on the Fluid tab of the component definition), once a user drills into an individual search, the master/detail format is displayed, and this function also returns true at that time.

Example

```
If (create PT_PAGE_UTILS:Banner()).isGuidedDisplay Then  
  /* do something when in guided mode */  
End-If;
```

Related Topics

- Portal Technology: Understanding Activity Guide Templates and Template Types

DynamicScreenReader Class Properties

In this section, the DynamicScreenReader class properties are presented in alphabetical order.

SuppressCommonActionItem property: DynamicScreenReader class

Description

Use the `SuppressCommonActionItem` property to set or return a Boolean value indicating whether to hide the Enable Screen Reader Mode link in the Actions menu for the life of the current component. Set this property in a PeopleCode event that occurs prior to any page Activate event.

Note

The default value is False.

This property is read/write.

Example

```
(create PT_PAGE_UTILS:DynamicScreenReader()).SuppressCommonActionItem = True;
```

Related Topics

- Application User's Guide: Enabling Screen Reader Mode

PanelController Class

Use the `PanelController` class to inquire on and update the modes and visibility of the Side Page 1 (left panel) and Side Page 2 (right panel) in fluid components. Because this class spawns `Panel` objects for each side panel, you do not need to instantiate `Panel` objects directly.

The system determines the initial characteristics of each panel based on the configuration of the fluid component, fluid activity guide instance, or master/detail component. The system also maintains the panels' runtime characteristics. The panel state is not maintained within the `PanelController` object (or any `Panel` objects it spawns). Therefore, you must ensure that any changes are updated back to the server to effect an actual change either by directly invoking the `UpdatePanel` method or indirectly by invoking the `Initialize` method with `auto-update` set to true.

It is recommended that you use the `PT_PAGE_UTILS:PanelController` class in component `PostBuild` events unless analysis indicates that page `Activate` or later events are more appropriate for certain applications.

Related Topics

- [Initialize method: PanelController class](#)
- [UpdatePanel method: PanelController class](#)

Understanding Panel Modes

Panels have three primary modes:

- Fixed* has no tab (when in primary mode) and is opened by default. A fixed mode panel shares the window real estate with the content when the panel is open. A fixed mode panel

can go into a secondary overlay mode—for example, when the browser window is smaller than a specified breakpoint, or when a device that supports orientation is rotated from landscape to portrait.

- *Collapsible* always has a tab and is closed by default (when in primary mode). A collapsible mode panel shares the window real estate with the content when the panel is open. A collapsible mode panel can go into a secondary overlay mode—for example, when the browser window is smaller than a specified breakpoint, or when a device that supports orientation is rotated from landscape to portrait. Unless explicitly set, the default state for all panels is collapsible and closed.
- *Overlay* is a primary mode only. An overlay mode panel always has a tab and always overlays the content when open.

PanelController Class Methods

In this section, the PanelController class methods are presented in alphabetical order.

GetSide1Mode method: PanelController class

Syntax

```
GetSide1Mode()
```

Description

Use the GetSide1Mode method to retrieve the current mode of the Side Page 1 panel as an Integer. Use the following integer constants of the Panel class:

- PANEL_MODE_COLLAPSIBLE - Collapsible mode.
- PANEL_MODE_FIXED - Fixed mode.
- PANEL_MODE_OVERLAY - Overlay mode.

Parameters

None

Returns

An Integer value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
  
/* A simpler alternative would be &oPC.IsSide1Collapsible ... */  
If &oPC.GetSide1Mode = &oPC.GetSide1Panel().PANEL_MODE_COLLAPSIBLE Then  
    ...  
End-If;
```

Related Topics

- [Understanding Panel Modes](#)
Panels have three primary modes:
- [IsSide1Collapsible method: PanelController class](#)
- [IsSide1Fixed method: PanelController class](#)
- [IsSide1Overlay method: PanelController class](#)

GetSide1Panel method: PanelController class

Syntax

```
GetSide1Panel()
```

Description

Use the GetSide1Panel method to instantiate a Panel object representing the Side Page 1 panel with its current state.

Parameters

None

Returns

A PT_PAGE_UTILS:Panel object.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
Local PT_PAGE_UTILS:Panel &oSide1 = &oPC.GetSide1Panel();
```

GetSide2Mode method: PanelController class

Syntax

```
GetSide2Mode()
```

Description

Use the GetSide2Mode method to retrieve the current mode of the Side Page 2 panel as an Integer. Use the following integer constants of the Panel class:

- PANEL_MODE_COLLAPSIBLE - Collapsible mode.
- PANEL_MODE_FIXED - Fixed mode.
- PANEL_MODE_OVERLAY - Overlay mode.

Parameters

None

Returns

An Integer value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
  
/* A simpler alternative would be &oPC.IsSide2Collapsible ... */  
If &oPC.GetSide2Mode = &oPC.GetSide2Panel().PANEL_MODE_COLLAPSIBLE Then  
    ...  
End-If;
```

Related Topics

- [Understanding Panel Modes](#)
Panels have three primary modes:
- [IsSide2Collapsible method: PanelController class](#)
- [IsSide2Fixed method: PanelController class](#)
- [IsSide2Overlay method: PanelController class](#)

GetSide2Panel method: PanelController class

Syntax

```
GetSide2Panel()
```

Description

Use the GetSide2Panel method to instantiate a Panel object representing the Side Page 2 panel with its current state.

Parameters

None

Returns

A PT_PAGE_UTILS:Panel object.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */
```

```
&oPC.Initialize( False);  
Local PT_PAGE_UTILS:Panel &oSide2 = &oPC.GetSide2Panel();
```

Initialize method: PanelController class

Syntax

```
Initialize(AutoUpdate)
```

Description

Use the Initialize method to initialize the state of the PanelController object indicating whether subsequent operations auto-update each panel (*AutoUpdate* = True). In addition, this method retrieves the initial settings for each panel from the server. You *must* invoke this method prior to any other panel controller operations. Typically, only set *AutoUpdate* to true when you intend to perform a single operation after invoking Initialize. When *AutoUpdate* is false, you must explicitly update the panels by invoking UpdatePanel.

Parameters

Parameter	Description
<i>AutoUpdate</i>	Specifies the auto-update setting as a Boolean value.

Returns

None

Example (Single Operation)

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide1ModeFixed(); /* change mode to Fixed */
```

Example (Multiple Operation)

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide1ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide1( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide1OpenState( True);  
&oPC.UpdatePanel(); /* Perform all updates to Side1/Side2 panels */
```

Related Topics

- [UpdatePanel method: PanelController class](#)

IsSide1Collapsible method: PanelController class

Syntax

```
IsSide1Collapsible()
```

Description

Use the IsSide1Collapsible method to return true if the Side Page 1 panel is set to collapsible mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Collapsible() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1ModeCollapsible method: PanelController class](#)

IsSide1CollisionInterPage method: PanelController class

Syntax

```
IsSide1CollisionInterPage()
```

Description

Use the IsSide1CollisionInterPage method to return a boolean value indicating whether the collision that occurred was an “inter-page collision.” *Inter-page collisions* occur when the inner component has included the left panel as part of the page content—for example, in PeopleTools 8.54, the PSL_TWOPANEL layout page provided the mechanism for creating a left panel. In this case, the collisions occur *between* the Side Page 1 of the fluid wrapper and the content of the inner component.

Parameters

None.

Returns

A boolean value.

Related Topics

- [IsSide1CollisionIntraPage method: PanelController class](#)
- [IsSide1HasCollision method: PanelController class](#)
- Fluid User Interface Developer's Guide: Left Panel Collision Handling with Slide-out Left Panels

IsSide1CollisionIntraPage method: PanelController class

Syntax

```
IsSide1CollisionIntraPage()
```

Description

Use the `IsSide1CollisionIntraPage` method to return a boolean value indicating whether the collision that occurred was an "intra-page collision." *Intra-page collisions* occur when the inner component has included its own left panel (that is, a page type of Side Page 1). Because the fluid wrapper also implements the left panel using Side Page 1, the collisions occur *within* this side page. Fluid components developed on PeopleTools 8.55 and later releases use Side Page 1 to implement the left panel.

Parameters

None.

Returns

A boolean value.

Related Topics

- [IsSide1CollisionInterPage method: PanelController class](#)
- [IsSide1HasCollision method: PanelController class](#)
- Fluid User Interface Developer's Guide: Left Panel Collision Handling with Slide-out Left Panels

IsSide1Enabled method: PanelController class

Syntax

```
IsSide1Enabled()
```

Description

Use the `IsSide1Enabled` method to return true if the Side Page 1 panel has been enabled by the system; otherwise, false if the system has disabled the panel.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Enabled() Then  
    ...  
End-If;
```

IsSide1Fixed method: PanelController class

Syntax

`IsSide1Fixed()`

Description

Use the `IsSide1Fixed` method to return true if the Side Page 1 panel is set to fixed mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Fixed() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1ModeFixed method: PanelController class](#)

IsSide1FullWidth method: PanelController class

Syntax

IsSide1FullWidth()

Description

Use the IsSide1FullWidth method to return true if the Side Page 1 panel is set to consume the full width of the window when the panel is open.

! Important

Full width mode is not recommended because the panel does not display an expand/collapse button; therefore, you must programmatically close the panel based on other user actions—such as when the user clicks a link or selects an item within the panel.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1FullWidth() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1FullWidth method: PanelController class](#)

IsSide1HasCollision method: PanelController class

Syntax

IsSide1HasCollision()

Description

Use the `IsSide1HasCollision` method to return a boolean value indicating whether a collision has occurred in the Side Page 1 panel *and* that the collision is being handled with slide-out handling.

Parameters

None.

Returns

A boolean value.

Related Topics

- [IsSide1CollisionInterPage method: PanelController class](#)
- [IsSide1CollisionIntraPage method: PanelController class](#)
- Fluid User Interface Developer's Guide: Left Panel Collision Handling with Slide-out Left Panels

IsSide1Hidden method: PanelController class

Syntax

```
IsSide1Hidden()
```

Description

Use the `IsSide1Hidden` method to return true if the Side Page 1 panel is hidden.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Hidden() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1Hidden method: PanelController class](#)

IsSide1Open method: PanelController class

Syntax

IsSide1Open()

Description

Use the IsSide1Open method to return true if the Side Page 1 panel is open.

! Important

Because invocations of SetSide1OpenState can have no effect in certain circumstances, this method is accurate only when the panel is set to a persistent open state.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Open() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1OpenState method: PanelController class](#)

IsSide1Overlay method: PanelController class

Syntax

IsSide1Overlay()

Description

Use the IsSide1Overlay method to return true if the Side Page 1 panel is set to overlay mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Overlay() Then  
    ...  
End-If;
```

Related Topics

- [SetSide1ModeOverlay method: PanelController class](#)

IsSide2Collapsible method: PanelController class

Syntax

```
IsSide2Collapsible()
```

Description

Use the IsSide2Collapsible method to return true if the Side Page 2 panel is set to collapsible mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2Collapsible() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2ModeCollapsible method: PanelController class](#)

IsSide2Enabled method: PanelController class

Syntax

```
IsSide2Enabled()
```

Description

Use the IsSide2Enabled method to return true if the Side Page 2 panel has been enabled by the system; otherwise, false if the system has disabled the panel.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide1Enabled() Then  
    ...  
End-If;
```

IsSide2Fixed method: PanelController class

Syntax

```
IsSide2Fixed()
```

Description

Use the IsSide2Fixed method to return true if the Side Page 2 panel is set to fixed mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2Fixed() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2ModeFixed method: PanelController class](#)

IsSide2FullWidth method: PanelController class

Syntax

```
IsSide2FullWidth()
```

Description

Use the IsSide2FullWidth method to return true if the Side Page 2 panel is set to consume the full width of the window when the panel is open.

Important

Full width mode is not recommended because the panel does not display an expand/collapse button; therefore, you must programmatically close the panel based on other user actions—such as when the user clicks a link or selects an item within the panel.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2FullWidth() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2FullWidth method: PanelController class](#)

IsSide2Hidden method: PanelController class

Syntax

```
IsSide2Hidden()
```

Description

Use the IsSide2Hidden method to return true if the Side Page 2 panel is hidden.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2Hidden() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2Hidden method: PanelController class](#)

IsSide2Open method: PanelController class

Syntax

```
IsSide2Open()
```

Description

Use the IsSide2Open method to return true if the Side Page 2 panel is open.

! Important

Because invocations of SetSide2OpenState can have no effect in certain circumstances, this method is accurate only when the panel is set to a persistent open state.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2Open() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2OpenState method: PanelController class](#)

IsSide2Overlay method: PanelController class

Syntax

IsSide2Overlay()

Description

Use the IsSide2Overlay method to return true if the Side Page 2 panel is set to overlay mode.

Parameters

None

Returns

A Boolean value.

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
If &oPC.IsSide2Overlay() Then  
    ...  
End-If;
```

Related Topics

- [SetSide2ModeOverlay method: PanelController class](#)

Refresh method: PanelController class

Syntax

Refresh()

Description

Use the Refresh method to retrieve the current settings for each panel from the server.

! Important

Typically, the PanelController object is declared with local scope. Only use this method to refresh the panels with current data from the server when the PanelController object has been declared with component scope to persist over multiple server trips. The Initialize method is used only within the initial PanelController object. In subsequent PeopleCode programs, use the Refresh method to retrieve the current snapshot from the system.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Component PT_PAGE_UTILS:PanelController &c_oPC; /* Initialized in another  
server trip - Not typically recommended */  
&c_oPC.Refresh(); /* re-initializes with the latest panel data for further  
processing */
```

Related Topics

- [Initialize method: PanelController class](#)

SetSide1FullWidth method: PanelController class

Syntax

SetSide1FullWidth(*UseFullWidth*)

Description

Use the SetSide1FullWidth method to specify a Boolean value indicating whether the Side Page 1 panel consumes the full width of the browser window when the panel is open.

Note

The default value is false.

Important

Full width mode is not recommended because the panel does not display an expand/collapse button; therefore, you must programmatically close the panel based on other user actions—such as when the user clicks a link or selects an item within the panel.

Parameters

Parameter	Description
<i>UseFullWidth</i>	Specifies a Boolean value indicating whether the panel is full width.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide1ModeOverlay(); /* change mode to overlay */  
&oPC.SetSide1FullWidth( True); /* make side 1 panel consume full width of  
page on open */  
&oPC.UpdatePanel(); /* perform all updates to Side1/Side2 panels */
```

Related Topics

- [IsSide1FullWidth method: PanelController class](#)

SetSide1Hidden method: PanelController class

Syntax

```
SetSide1Hidden(Hidden)
```

Description

Use the SetSide1Hidden method to specify a Boolean value indicating whether the Side Page 1 panel is hidden (not displayed) to users.

Note

The default value is false.

Parameters

Parameter	Description
<i>Hidden</i>	Specifies a Boolean value indicating whether the panel is hidden.

Returns

None

Example

```
import PT_PAGE_UTILS::*;
Local PT_PAGE_UTILS:PanelController &oPC = create
PT_PAGE_UTILS:PanelController();
&oPC.Initialize( True); /* Initialize for single operation - auto update so
no need for UpdatePanel()*/
&oPC.SetSide1Hidden( True); /* do not display the side 1 panel */
```

Related Topics

- [IsSide1Hidden method: PanelController class](#)

SetSide1ModeCollapsible method: PanelController class

Syntax

```
SetSide1ModeCollapsible()
```

Description

Use the SetSide1ModeCollapsible method to set the mode of the Side Page 1 panel to collapsible.

Note

Collapsible is the default mode for a panel.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide1ModeCollapsible(); /* change mode to collapsible mode (default)  
*/
```

Related Topics

- [IsSide1Collapsible method: PanelController class](#)

SetSide1ModeFixed method: PanelController class

Syntax

```
SetSide1ModeFixed()
```

Description

Use the SetSide1ModeFixed method to set the mode of the Side Page 1 panel to fixed.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide1ModeFixed(); /* change mode to Fixed */
```

Related Topics

- [IsSide1Fixed method: PanelController class](#)

SetSide1ModeOverlay method: PanelController class

Syntax

```
SetSide1ModeOverlay()
```

Description

Use the `SetSide1ModeOverlay` method to set the mode of the Side Page 1 panel to overlay.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS::*;
Local PT_PAGE_UTILS:PanelController &oPC = create
PT_PAGE_UTILS:PanelController();
&oPC.Initialize( True); /* Initialize for single operation - auto update so
no need for UpdatePanel()*/
&oPC.SetSide1ModeOverlay(); /* change mode to always overlay mode */
```

Related Topics

- [IsSide1Overlay method: PanelController class](#)

SetSide1OpenState method: PanelController class

Syntax

```
SetSide1OpenState(Open)
```

Description

Use the `SetSide1OpenState` method to set the state of the Side Page 1 panel to open when the *Open* parameter is true; otherwise, when *Open* is false, the panel state is set to closed.

Note

The state of a panel is closed by default.

Important

Whether a panel is open is a transient condition that depends on the panel's mode and prior state settings (such as, `ForceOpen` or `PersistentOpen`). Therefore, invocation of this method might be ignored.

Parameters

Parameter	Description
<i>Open</i>	Specifies a Boolean value indicating whether the panel is open.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide1( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide1OpenState( True);  
&oPC.UpdatePanel(); /* perform all updates to Side1/Side2 panels */
```

Related Topics

- [IsSide1Open method: PanelController class](#)
- [UseForceOpenModeSide1 method: PanelController class](#)
- [UsePersistentOpenModeSide1 method: PanelController class](#)

SetSide1OverrideMediaQueries method: PanelController class

Syntax

```
SetSide1OverrideMediaQueries(Override)
```

Description

Use the SetSide1OverrideMediaQueries method to specify a Boolean value indicating whether custom media queries are allowed for the Side Page 1 panel. Custom media queries allow you to set custom breakpoints for when the fixed or collapsible modes go into secondary overlay mode.

Note

The default value is false.

Parameters

Parameter	Description
<i>Override</i>	Specifies a Boolean value indicating whether custom media queries are allowed for the panel.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( False); /* Initialize for multiple operations*/  
&oPC.SetSide1OverrideMediaQueries( True);  
/* Bypasses Oracle-supplied media queries that convert the panel mode to  
secondary overlay mode for */  
/* fixed or collapsible primary modes to allow media queries of your own  
design if desired. */  
&oPC.SetSide1ModeFixed(); /* change mode to Fixed */  
&oPC.UpdatePanel(); /* perform all updates to Side1/Side2 panels */
```

SetSide2FullWidth method: PanelController class

Syntax

```
SetSide2FullWidth(UseFullWidth)
```

Description

Use the SetSide2FullWidth method to specify a Boolean value indicating whether the Side Page 2 panel consumes the full width of the browser window when the panel is open.

Note

The default value is false.

Important

Full width mode is not recommended because the panel does not display an expand/collapse button; therefore, you must programmatically close the panel based on other user actions—such as when the user clicks a link or selects an item within the panel.

Parameters

Parameter	Description
<i>UseFullWidth</i>	Specifies the a Boolean value indicating whether the panel is full width.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide2ModeOverlay(); /* change mode to overlay */  
&oPC.SetSide2FullWidth( True); /* make side 1 panel consume full width of  
page on open */  
&oPC.UpdatePanel(); /* perform all updates to Side2/Side2 panels */
```

Related Topics

- [IsSide2FullWidth method: PanelController class](#)

SetSide2Hidden method: PanelController class

Syntax

SetSide2Hidden(*Hidden*)

Description

Use the SetSide2Hidden method to specify a Boolean value indicating whether the Side Page 2 panel is hidden (not displayed) to users.

Note

The default value is false.

Parameters

Parameter	Description
<i>Hidden</i>	Specifies a Boolean value indicating whether the panel is hidden.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide2Hidden( True); /* do not display the side 1 panel */
```

Related Topics

- [IsSide2Hidden method: PanelController class](#)

SetSide2ModeCollapsible method: PanelController class

Syntax

```
SetSide2ModeCollapsible()
```

Description

Use the SetSide2ModeCollapsible method to set the mode of the Side Page 2 panel to collapsible.

Note

Collapsible is the default mode for a panel.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide2ModeCollapsible(); /* change mode to collapsible mode (default)  
*/
```

Related Topics

- [IsSide2Collapsible method: PanelController class](#)

SetSide2ModeFixed method: PanelController class

Syntax

```
SetSide2ModeFixed()
```

Description

Use the SetSide2ModeFixed method to set the mode of the Side Page 2 panel to fixed.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide2ModeFixed(); /* change mode to Fixed */
```

Related Topics

- [IsSide2Fixed method: PanelController class](#)

SetSide2ModeOverlay method: PanelController class

Syntax

```
SetSide2ModeOverlay()
```

Description

Use the SetSide2ModeOverlay method to set the mode of the Side Page 2 panel to overlay.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();
```

```
&oPC.Initialize( True); /* Initialize for single operation - auto update so  
no need for UpdatePanel()*/  
&oPC.SetSide2ModeOverlay(); /* change mode to always overlay mode */
```

Related Topics

- [IsSide2Overlay method: PanelController class](#)

SetSide2OpenState method: PanelController class

Syntax

```
SetSide2OpenState(Open)
```

Description

Use the SetSide2OpenState method to set the state of the Side Page 2 panel to open when the *Open* parameter is true; otherwise, when *Open* is false, the panel state is set to closed.

Note

The state of a panel is closed by default.

Important

Whether a panel is open is a transient condition that depends on the panel's mode and prior state settings (such as, ForceOpen or PersistentOpen). Therefore, invocation of this method might be ignored.

Parameters

Parameter	Description
<i>Open</i>	Specifies a Boolean value indicating whether the panel is open.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide2ModeCollapsible(); /* Change mode to collapsible */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */
```



```
&oPC.UseForceOpenModeSide2( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide2OpenState( True);  
&oPC.UpdatePanel(); /* Perform all updates to Side2/Side2 panels */
```

Related Topics

- [IsSide2Open method: PanelController class](#)
- [UseForceOpenModeSide2 method: PanelController class](#)
- [UsePersistentOpenModeSide2 method: PanelController class](#)

SetSide2OverrideMediaQueries method: PanelController class

Syntax

```
SetSide2OverrideMediaQueries(Override)
```

Description

Use the `SetSide2OverrideMediaQueries` method to specify a Boolean value indicating whether custom media queries are allowed for the Side Page 2 panel. Custom media queries allow you to set custom breakpoints for when the fixed or collapsible modes go into secondary overlay mode.

Note

The default value is false.

Parameters

Parameter	Description
<i>Override</i>	Specifies a Boolean value indicating whether custom media queries are allowed for the panel.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
&oPC.Initialize( False); /* Initialize for multiple operations*/  
&oPC.SetSide2OverrideMediaQueries();  
/* Bypasses Oracle-supplied media queries that convert the panel mode to  
secondary overlay mode for */  
/* fixed or collapsible primary modes to allow media queries of your own  
design if desired. */
```

```
&oPC.SetSide2ModeFixed(); /* change mode to Fixed */  
&oPC.UpdatePanel(); /* perform all updates to Side2/Side2 panels */
```

UpdatePanel method: PanelController class

Syntax

UpdatePanel()

Description

Use the UpdatePanel method to update the state of the panel definitions on the server with the modification made through any of the SetSide* methods.

Note

This method is not necessary when the PanelController object is initialized with *AutoUpdate* set to true.

Parameters

None

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide1ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide1( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide1OpenState( True);  
&oPC.UpdatePanel(); /* Perform all updates to Side1/Side2 panels */
```

Related Topics

- [Initialize method: PanelController class](#)

UseForceOpenModeSide1 method: PanelController class

Syntax

UseForceOpenModeSide1(*EnableForceMode*)

Description

Use the UseForceOpenModeSide1 method to specify a Boolean value indicating whether the Side Page 1 panel can be forced to the open state when the panel is in fixed or collapsed (primary) mode or even when those modes are in secondary overlay mode. Invoke this method prior invoking a method to open the panel.

Note

The default value is false.

Parameters

Parameter	Description
<i>EnableForceMode</i>	Specifies a Boolean value indicating whether the panel can be forced to the open state.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide1ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide1( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide1OpenState( True);  
&oPC.UpdatePanel(); /* Perform all updates to Side1/Side2 panels */
```

Related Topics

- [SetSide1OpenState method: PanelController class](#)
- [UsePersistentOpenModeSide1 method: PanelController class](#)

UseForceOpenModeSide2 method: PanelController class

Syntax

UseForceOpenModeSide2(*EnableForceMode*)

Description

Use the UseForceOpenModeSide2 method to specify a Boolean value indicating whether the Side Page 2 panel can be forced to the open state when the panel is in fixed or collapsed (primary) mode or even when those modes are in secondary overlay mode. Invoke this method prior invoking a method to open the panel.

Note

The default value is false.

Parameters

Parameter	Description
<i>EnableForceMode</i>	Specifies a Boolean value indicating whether the panel can be forced to the open state.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide2ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide2( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide2OpenState( True);  
&oPC.UpdatePanel(); /* Perform all updates to Side1/Side2 panels */
```

Related Topics

- [SetSide2OpenState method: PanelController class](#)
- [UsePersistentOpenModeSide2 method: PanelController class](#)

UsePersistentOpenModeSide1 method: PanelController class

Syntax

UsePersistentOpenModeSide1(*EnablePersistOpen*)

Description

Use the UsePersistentOpenModeSide1 method to specify a Boolean value indicating whether the Side Page 1 panel is set to the persistent open state, which means that the system will not automatically close the panel after page transitions or refreshes. The panel must still be explicitly opened, after which, it must also be explicitly closed.

Note

The default value is false.

Parameters

Parameter	Description
<i>EnablePersistOpen</i>	Specifies a Boolean value indicating whether the panel is set to the persistent open state.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide1ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide1( True);  
/* Persist the open state over page transitions */  
&oPC.UsePersistentOpenModeSide1( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide1OpenState( True);  
&oPC.UpdatePanel(); /* perform all updates to Side1/Side2 panels */
```

Related Topics

- [SetSide1OpenState method: PanelController class](#)
- [UseForceOpenModeSide1 method: PanelController class](#)

UsePersistentOpenModeSide2 method: PanelController class

Syntax

UsePersistentOpenModeSide2(*EnablePersistOpen*)

Description

Use the UsePersistentOpenModeSide2 method to specify a Boolean value indicating whether the Side Page 2 panel is set to the persistent open state, which means that the system will not automatically close the panel after page transitions or refreshes. The panel must still be explicitly opened, after which, it must also be explicitly closed.

Note

The default value is false.

Parameters

Parameter	Description
<i>EnablePersistOpen</i>	Specifies a Boolean value indicating whether the panel is set to the persistent open state.

Returns

None

Example

```
import PT_PAGE_UTILS:*;  
Local PT_PAGE_UTILS:PanelController &oPC = create  
PT_PAGE_UTILS:PanelController();  
/* Multiple operations to be performed - auto-update disabled */  
&oPC.Initialize( False);  
&oPC.SetSide2ModeFixed(); /* Change mode to fixed */  
/* Set force mode so that the panel can be forced open in fixed or collapsed  
*/  
/* primary mode as well as secondary overlay mode. */  
&oPC.UseForceOpenModeSide2( True);  
/* Persist the open state over page transitions */  
&oPC.UsePersistentOpenModeSide2( True);  
/* Set panel open (even in secondary overlay mode) */  
&oPC.SetSide2OpenState( True);  
&oPC.UpdatePanel(); /* perform all updates to Side1/Side2 panels */
```

Related Topics

- [SetSide2OpenState method: PanelController class](#)
- [UseForceOpenModeSide2 method: PanelController class](#)

PanelController Class Properties

In this section, the PanelController class properties are presented in alphabetical order.

AutoUpdate property: PanelController class

Description

Use the AutoUpdate property to set or return a Boolean valuable indicating whether subsequent operations auto-update each panel. Typically, only set AutoUpdate to true when you intend to perform a single operation after invoking Initialize. When AutoUpdate is false, you must explicitly update the panels by invoking UpdatePanel.

This property is read/write.

Example

```
import PT_PAGE_UTILS:*;  
Component PT_PAGE_UTILS:PanelController &c_oPC; /* Initialized in a  
different program */  
&c_oPC.Refresh();  
/* perform one or more operations ... */  
If &c_oPC.AutoUpdate = False Then  
    &c_oPC.UpdatePanel();  
End-If;
```

InDefaultMode property: PanelController class

Description

Use the InDefaultMode property to return a Boolean value indicating whether the panels are in their default state—that is, before the first page Activate event.

This property is effectively read-only.

Utils Class

Use the PT_PAGE_UTILS:Utils class in fluid component PostBuild, page Activate, or later events.

The PT_PAGE_UTILS:Utils class provides general utility methods for working with viewport settings, displaying confirmation messages in the banner, and working with toggle buttons. The methods of the PT_PAGE_UTILS:Utils class can be organized into four categories.

Confirmation Message Methods

Use these methods to set and clear transient confirmation message beneath the fluid banner.

Related Topics

- [ClearConfirmationMessage method: Utils class](#)
- [CloseConfirmationMessage method: Utils class](#)

- [SetConfirmationMessage method: Utils class](#)

Toggle Button Methods

Use the toggle button methods to manipulate *toggle buttons*. A toggle button is a two-state button indicating whether the button is pressed or not pressed (for example, on or off). *Pressed* (or on) means that the functionality implemented by the button is enabled. *Not pressed* (or off) means that the functionality implemented by the button is not enabled (or the default functionality is applied). For example, a Filter toggle button on a grid would be unpressed (off) when no user filter has been applied to a grid. Conversely, the Filter toggle button would be pressed (or on) if one or more filters have been applied to the grid, which change the data that is displayed. The “pressed” indicator of the toggle button tells the user that a filter has been applied to the displayed grid data.

Related Topics

- [GetButtonState method: Utils class](#)
- [SetButtonState method: Utils class](#)
- [ToggleButtonState method: Utils class](#)

Viewport Methods

Setting the viewport for each fluid component ensures that your fluid applications operate properly across all device types, particularly on small form factor devices such as smart phones. [SetDefaultViewport method: Utils class](#) is the recommended approach for setting the viewport because it sets the recommended defaults.

Related Topics

- [GetDefaultViewport method: Utils class](#)
- [SetCustomViewport method: Utils class](#)
- [SetDefaultViewport method: Utils class](#)

Miscellaneous Methods

The [AnnounceText method: Utils class](#) method is used to post a message to an ARIA (Accessible Rich Internet Applications) live region of the page

The [SetFavIcon method: Utils class](#) method is used to set a component-specific favicon—also known as a shortcut icon, website icon, tab icon, URL icon, and so on.

Utils Class Methods

In this section, the Utils class methods are presented in alphabetical order.

AnnounceText method: Utils class

Syntax

```
AnnounceText(MessageText )
```


Description

Use the `AnnounceText` method to post a message to an ARIA (Accessible Rich Internet Applications) live region of the page to be read by screen readers and other assistive technologies. An ARIA live region can appear on standard fluid pages and modal pages.

Parameters

Parameter	Description
<i>MessageText</i>	Specifies the message text as a String value.

Returns

None

Example

```
(create PT_PAGE_UTILS:Utils()).AnnounceText("Test of Announcement");
```

ClearConfirmationMessage method: Utils class

Syntax

```
ClearConfirmationMessage()
```

Description

Use the `ClearConfirmationMessage` method to dismiss the transient confirmation message (to ensure that the message is dismissed even if auto dismiss is disabled through the user's preference settings).

Note

Methods that perform the same functions exist in the `Banner` class. Typically, the `Utils` class methods are preferred only when you have instantiated a `Utils` object and want to avoid instantiating a `Banner` object.

Parameters

None

Returns

None

Example

```
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();  
/* Some processing... */  
&oUtils.ClearConfirmationMessage();  
/* Additional processing... */
```

Related Topics

- [CloseConfirmationMessage method: Utils class](#)
- [SetConfirmationMessage method: Utils class](#)
- [ClearConfirmation method: Banner class](#)
- [SetConfirmationMessage method: Banner class](#)

CloseConfirmationMessage method: Utils class

Syntax

CloseConfirmationMessage()

Description

Use the CloseConfirmationMessage method to dismiss the transient confirmation message (to ensure that the message is dismissed even if auto dismiss is disabled through the user's preference settings).

Note

Methods that perform the same functions exist in the Banner class. Typically, the Utils class methods are preferred only when you have instantiated a Utils object and want to avoid instantiating a Banner object.

Parameters

None

Returns

None

Example

```
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();  
/* Some processing... */  
&oUtils.CloseConfirmationMessage();  
/* Additional processing... */
```

Related Topics

- [ClearConfirmationMessage method: Utils class](#)
- [SetConfirmationMessage method: Utils class](#)
- [ClearConfirmation method: Banner class](#)
- [SetConfirmationMessage method: Banner class](#)

GetButtonState method: Utils class

Syntax

```
GetButtonState(&ButtonField)
```

Description

Use the GetButtonState method to return the state of a toggle button as a Boolean value.

Parameters

Parameter	Description
<i>&ButtonField</i>	Specifies the toggle button as a Field object.

Returns

A Boolean value: True if the button state is "pressed" (or on), otherwise False.

Example

```
Local Field &oToggleButton = GetField();
Local PT_PAGE_UTILS &oUtils = create PT_PAGE_UTILS:Utils();
If (&oUtils.GetButtonState(&oToggleButton) Then
    /* Processing for the on state */
Else
    /* Processing for the off state */
End-If;
Local boolean &bState = &oUtils.ToggleButtonState(&oToggleButton);
```

Related Topics

- [SetButtonState method: Utils class](#)
- [ToggleButtonState method: Utils class](#)

GetDefaultViewport method: Utils class

Syntax

```
GetDefaultViewport()
```

Description

Use the GetDefaultViewport method to return the default viewport settings from the system for this device and form factor.

Note

The default viewport settings are those recommended by Oracle for each device and form factor.

Parameters

None

Returns

A String value.

Example

```
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();
Local string &sDefViewport = &oUtils.GetDefaultViewport();
If (find("height",&sDefViewport) < 1) Then
    &oUtils.SetCustomViewport(&sDefViewport | ",height=device-height");
End-If;
```

Related Topics

- [SetCustomViewport method: Utils class](#)
- [SetDefaultViewport method: Utils class](#)

SetButtonState method: Utils class

Syntax

```
SetButtonState(&ButtonField, NewState)
```

Description

Use the SetButtonState method to set a button field as a "stateful" button (that is, as a toggle or on/off button); use this method to initialize the button state prior to initial display. Use this method with image-only buttons or with buttons that have the psc_button-simple style applied.

Parameters

Parameter	Description
<i>&ButtonField</i>	Specifies the button field as a Field object.
<i>NewState</i>	Specifies the new state as a Boolean value.

Returns

None

Example

```
/* Get the &ToggleButtonField Field object first */  
(create PT_PAGE_UTILS:Utils()).SetButtonState(&ToggleButtonField, False);
```

SetConfirmationMessage method: Utils class

Syntax

SetConfirmationMessage(*MessageText*)

Description

Use the SetConfirmationMessage method to display a typically transient confirmation message below the fluid banner.

Note

Methods that perform the same functions exist in the Banner class. Typically, the Utils class methods are preferred only when you have instantiated a Utils object and want to avoid instantiating a Banner object.

Parameters

Parameter	Description
<i>MessageText</i>	Specifies the message text as a String value.

Returns

None

Example

```
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();  
/* Some processing... */  
&oUtils.SetConfirmationMessage("Your operation was successful.");  
/* Additional processing... */
```

Related Topics

- [ClearConfirmationMessage method: Utils class](#)
- [CloseConfirmationMessage method: Utils class](#)
- [ClearConfirmation method: Banner class](#)
- [SetConfirmationMessage method: Banner class](#)

SetCustomViewport method: Utils class

Syntax

```
SetCustomViewport(ViewportText)
```

Description

Use the SetCustomViewport method to set the viewport to a custom size.

Parameters

Parameter	Description
<i>ViewportText</i>	Specifies the viewport attributes as a String value.

Returns

None

Example

```
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();
If (%Request.GetParameter("CUSTOMVIEWPORT") <> "") Then
    &oUtils.SetCustomViewport(&oUtils.GetDefaultViewport() | ",height=device-
height");
Else
    &oUtils.SetDefaultViewport();
End-If;
```

Related Topics

- [GetDefaultViewport method: Utils class](#)
- [SetDefaultViewport method: Utils class](#)

SetDefaultViewport method: Utils class

Syntax

```
SetDefaultViewport()
```

Description

Use the SetDefaultViewport method to set the viewport to the default system settings.

! Important

Setting the viewport for each fluid component ensures that your fluid applications operate properly across all device types, particularly on small form factor devices such as smart phones. This method is the recommended approach for setting the viewport because it sets the recommended defaults.

Parameters

None

Returns

None

Example

```
(create PT_PAGE_UTILS:Utils()).SetDefaultViewport();
```

Related Topics

- [GetDefaultViewport method: Utils class](#)
- [SetCustomViewport method: Utils class](#)

SetFavIcon method: Utils class

Syntax

```
SetFavIcon(image_ID)
```

Description

Use the SetFavIcon method to set a component-specific favicon—also known as a shortcut icon, website icon, tab icon, URL icon, and so on. When the fluid component is accessed by a user, this favicon is displayed in the browser tab instead of the default favicon.

Parameters

Parameter	Description
<i>image_ID</i>	Specifies the ID for an image stored in the PeopleTools image catalog.

Returns

None.

Example

Note

The *image_ID* can also be specified as *Image.IMAGE_ID*.

```
import PT_PAGE_UTILS:*;  
  
Local PT_PAGE_UTILS:Utils &oUtils = create PT_PAGE_UTILS:Utils();  
Local string &image = "MY_LOGO_FAVICON";  
&oUtils.SetFavIcon(&image);
```

Related Topics

- Application Designer Developer's Guide: Creating Image Definitions

ToggleButtonState method: Utils class

Syntax

```
ToggleButtonState(&ButtonField)
```

Description

Use the ToggleButtonState method to toggle the current state of a toggle button and returns the new state as a Boolean value.

Parameters

Parameter	Description
<i>&ButtonField</i>	Specifies the button field as a Field object.

Returns

A Boolean value.

Example

```
/* Get the &ToggleButtonField Field object first */  
Local boolean &bState = (create  
PT_PAGE_UTILS:Utils()).ToggleButtonState(GetField());
```

Related Topics

- [SetButtonState method: Utils class](#)
- [GetButtonState method: Utils class](#)

GlobalEventMapping Class

Understanding the GlobalEventMapping Class

The PTCS_GLOBALEVENTMAPPING application package contains the GlobalEventMapping class. To implement global event mapping, you should import the PTCS_GLOBALEVENTMAPPING application package.

GlobalEventMapping Class Methods

In this section, the GlobalEventMapping class methods are presented in alphabetical order.

CreateGlobalEventMappingConfig method: GlobalEventMapping class

Syntax

```
CreateGlobalEventMappingConfig(config_name, service_ID)
```

Description

Use this method to create a global event mapping configuration.

Before you call the CreateGlobalEventMappingConfig method, you should ensure that the related content service definition is created. For information on creating a related content service definition, see Portal Technology: Creating Service Definitions for Event Mapping.

Parameters

Parameter	Description
<i>config_name</i>	Specify a unique name to identify the event. The configuration name can contain a maximum of 12 characters. If you enter more than 12 characters, only the first 12 characters are retained. The configuration name is prefixed with PTCS_EVMAP_GBL_. For example, if you enter CHATBOT as the configuration name, the configuration is saved as PTCS_EVMAP_GBL_CHATBOT in the database.
<i>service_ID</i>	Specify the service ID of the related content service definition.

Returns

A boolean value. True if the configuration is created successfully; false otherwise.

Example

```
import PTCS_GLOBALEVENTMAPPING.*;

Local PTCS_GLOBALEVENTMAPPING:GlobalEventManager &globalObj = create
PTCS_GLOBALEVENTMAPPING:GlobalEventManager();

/*CreateGlobalEventManagerConfig (<<CONFIG NAME>>,<<SERVICE_ID>>*/

Local boolean &bstatus = &globalObj.CreateGlobalEventManagerConfig("CHATBOT",
"SERVICEID_1");
```

Related Topics

- [DeleteGlobalEventManagerConfig method: GlobalEventManager class](#)

DeleteGlobalEventManagerConfig method: GlobalEventManager class

Syntax

```
DeleteGlobalEventManagerConfig(config_name)
```

Description

Use this method to delete a global event mapping configuration.

Parameters

Parameter	Description
<i>config_name</i>	Specify the global event mapping configuration to be deleted.

Returns

A boolean value. True if the global event mapping configuration is deleted; false otherwise.

Example

```
import PTCS_GLOBALEVENTMAPPING.*;

Local PTCS_GLOBALEVENTMAPPING:GlobalEventManager &globalObj = create
PTCS_GLOBALEVENTMAPPING:GlobalEventManager();

/*DeleteGlobalEventManagerConfig (<<CONFIG NAME>>*/

Local boolean &bdel = &globalObj.DeleteGlobalEventManagerConfig("CHATBOT");
```

Related Topics

- [CreateGlobalEventManagerConfig method: GlobalEventManager class](#)

Grid Classes

Understanding Grid and GridColumn Classes

A grid looks and behaves like a spreadsheet embedded in a page: it has column headings, row headings, cells, and horizontal and vertical scroll bars. It can be used instead of a single-level scroll. It is analogous to a scroll region on a page. Each row in a grid corresponds to a set of controls in a scroll occurrence. Each cell in a grid corresponds to a field on a page.

The grid class enables you to instantiate only GridColumn objects, which in turn enables you to change grid column attributes without having to write PeopleCode that loops through every row of the grid.

Note

PeopleSoft builds a page grid one row at a time. Because the grid class applies to a complete grid, you can't attach PeopleCode that uses the grid class to events that occur before the grid is built; the earliest event you can use is the page Activate Event.

Note

Use the grid classes to control the display of a grid control. If you want to manipulate an analytic grid, used with PeopleSoft Analytic Calculation Engine data, you must use the AnalyticGrid classes.

Related Topics

- [GridColumn Class](#)
Grid columns are page fields that comprise a grid, which is itself a page field. Similarly, a group of GridColumn objects comprises a Grid object. The GridColumn class enables you to change grid column attributes without having to write PeopleCode that loops through every row of the grid.
- Application Designer Developer's Guide: Using Grids
- PeopleCode Developer's Guide: Activate Event
- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.

Shortcut Considerations

An expression of the form

```
&MYGRID.columnname.property
```

is converted to an object expression by using `GetColumn(columnname)`. The following examples are equivalent.

Using *columnname*:

```
&MYGRIDCOLUMN = &MYGRID.CHECKLIST_ITEMCODE;
```

Using the `GetColumn` method:

```
&MYGRIDCOLUMN = &MYGRID.GetColumn("CHECKLIST_ITEMCODE");
```

The following examples are equivalent.

Using *columnname*:

```
&MYGRID.CHECKLIST_ITEMCODE.Visible = False;
```

Using the `GetColumn` method:

```
&MYGRID.GetColumn("CHECKLIST_ITEMCODE").Visible = False;
```

The Grid Class in PeopleCode

The PeopleCode grid object is a reference to a page runtime object for the grid. These particular page runtime objects aren't present until the Component is started.

Note

PeopleSoft builds a page grid one row at a time. Because the Grid class applies to a complete grid, you can't attach PeopleCode that uses the Grid class to events that occur before the grid is built; the earliest event you can use is the page Activate Event.

If you're using the grid within a secondary page, the runtime object for the grid isn't created until the secondary page is run. The grid object can't be obtained until then, which means that the earliest PeopleCode event you can use to activate a grid that's on a secondary page is the Activate event for the secondary page.

The attributes you set for displaying a page grid remain in effect only while the page is active. When you switch between pages in a component, you have to reapply those changes *every time* the page is displayed.

In addition, the Activate event associated with a page fires every time the page is displayed. Any PeopleCode associated with that Activate event runs, which may undo the changes you

made when the page was last active. For example, if you hide a grid column in the Activate event, then display it as part of a user action, when the user tabs to another page in the component, then tabs back, the Activate event runs again, hiding the grid column again.

If a user at runtime hides a column of a grid, tabs to another page in the component, then tabs back to the first page, the page is refreshed and the grid column is displayed again.

When you place a grid on a page, the grid is automatically named the same as the name of the primary record of the scroll for the grid. This is the name you use with the GetGrid function. You can change this name on the Record tab of the Grid properties.

Note

There is no visible property for a grid, just a grid column. However, you can still hide an entire grid. Remember, many of the Rowset methods and properties work on a grid. If you want to hide an entire grid, obtain the rowset for that grid and use the HideAllRows method of the Rowset class to hide the grid.

Use the grid classes to access an ordinary grid. Use the analytic grid classes to access an analytic grid.

Related Topics

- [Understanding the Analytic Calculation Engine Classes](#)
PeopleSoft Analytic Calculation Engine comprises a calculation engine plus several PeopleTools features which enable application developers to define both the calculation rules and the display of calculated data within PeopleSoft applications for the purposes of multi-dimensional reporting, data editing and analysis.
- PeopleCode Developer's Guide: Activate Event
- [HideAllRows method: Rowset class](#)

Data Type for a Grid or Grid Column Object

Grids are declared using the Grid data type. For example,

```
Local Grid &MYGRID;
```

Grid Columns are declared using the GridColumn data type. For example:

```
Local GridColumn &MYGRIDCOL;
```

Scope of a Grid or Grid Column Object

Both the grid and grid column objects can be instantiated from PeopleCode only.

A grid is a control on a page. You generally use these objects only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message subscription, a Component Interface, and so on.

In addition, PeopleSoft builds a page grid one row at a time. Because the Grid class applies to a complete grid, you can't attach PeopleCode that uses the Grid class to events that occur before the grid is built; the earliest event you can use is the page Activate Event.

Grid Class Built-in Function

PeopleCode Language Reference: GetGrid function

Grid Class Methods

In this section, we discuss each Grid class method.

EnableColumns method: Grid class

Syntax

```
EnableColumns(&Array)
```

Description

Use this method to enable or disable one or more columns in a grid. When a column is enabled, it is editable; when it's disabled, it is not editable.

The EnableColumns method of the Grid class can provide a noticeable performance improvement over multiple calls to set the Enabled property of the GridColumn class. Each call manipulating a grid (either using a Grid class method or setting a GridColumn property) has a significant, and similar performance overhead. Therefore, one key to increasing the performance of PeopleCode programs manipulating grids is to reduce the number of these calls. Performance testing data suggests that if your program is changing three or more columns, use one of the Grid class methods, such as the EnableColumns method, instead of setting the column properties directly. The single call to the Grid class method offsets the small overhead of creating and populating the required array.

Parameters

Parameter	Description
<i>&Array</i>	Specify a two-dimensional array containing the column name and a value (Y/N) indicating whether the column is enabled.

Returns

None.

Example

```
&AREnable = CreateArrayRept(CreateArrayRept("", 2), 0);  
&AREnable.Push(CreateArray("JOB_DETAIL", "Y"));  
&AREnable.Push(CreateArray("JOB_TIME", "Y"));  
&myGrid.EnableColumns(&AREnable);
```

Related Topics

- [Enabled property: GridColumn class](#)

GetColumn method: Grid class

Syntax

`GetColumn(columnname)`

Description

The `GetColumn` method instantiates a grid column object from the `Grid` class, and populates it with a grid column from the grid object executing this method. Specify the grid column name in the page field properties for that field, consisting of any combination of uppercase letters, digits and "#", "\$", "@", and "_".

To specify a grid column name:

1. Open the page in Application Designer, select the grid and access the page field properties.
2. Select the Columns tab on the grid properties.
3. Either double-click on the grid column you want to name, or select the column and click the Properties button.
4. On the General tab, type the grid column name in the Page Field Name field.

Note

Although it's possible to base multiple grid columns on the same record field, the Page Field Name you enter for each grid column must be unique, not just for that grid, but for that page. If you have two grids on a page, every page field name must be unique to the page.

Parameters

Parameter	Description
<i>columnname</i>	Specify a string containing the value of the Page Field Name on the General tab of the grid column's properties. You must have previously entered a value for the Page Field Name for the grid column you want to work with.

Returns

A `GridColumn` object populated with the grid column specified as the parameter to this method.

Example

```
local Grid &MYGRID;  
local GridColumn &MYGRIDCOLUMN;  
  
&MYGRID = GetGrid(PAGE.EMPLOYEE_CHECKLIST, "EMPL_GRID");  
&MYGRIDCOLUMN = &MYGRID.GetColumn("CHECKLIST_ITEMCODE");
```

The following function loops through rows on a grid. The function finds each row that is selected. It does this through the Selected property of the Row class of PeopleCode. Data is then moved from the selected row to a new row, on a different grid, in the same page. The way in which this function is written, data is moved from &SCROLL_SHELF to &SCROLL_CART. These are two different rowset objects, of two different grids, on the same page. Note that the two grids in this example are on the same occurs level.

```

/* Moving data between grids on the same occurs level */
/* of the same page */

Local Rowset &SCROLL_CART, &SCROLL_SHELF;

Function move_rows(&SCROLL_CART As Rowset, &SCROLL_SHELF As Rowset);

    &I = 1;
    /* loop to find whether row is selected */
    Repeat
        If &SCROLL_SHELF.GetRow(&I).Selected = True Then

            If All(&SCROLL_CART(1).GetRecord(1).QEPC_ITEM.Value) Then

                &SCROLL_CART.InsertRow(&SCROLL_CART.ActiveRowCount);
            End-If;

            /* if it is selected move data to other grid */

            &SCROLL_SHELF.GetRow(&I).GetRecord(1).CopyFieldsTo(&SCROLL_CART.GetRow⇒
(&SCROLL_CART.ActiveRowCount).GetRecord(1));

            /* delete row from current grid so data disappears */

            &SCROLL_SHELF.DeleteRow(&I);
            &I = &I - 1;
        End-If;

        &I = &I + 1;
        Until &I = &SCROLL_SHELF.ActiveRowCount + 1;

    /* end of loop *****/

End-Function;

/***** end of function *****/

/* Creating the rowset object */

&SCROLL_CART = GetLevel0()(1).GetRowset(SCROLL.QEPC_CART);
&SCROLL_SHELF = GetLevel0()(1).GetRowset(SCROLL.QEPC_SHELF);

/* calling the function */

move_rows(&SCROLL_CART, &SCROLL_SHELF);

```

Related Topics

- PeopleCode Language Reference: GetGrid function

LabelColumns method: Grid class

Syntax

```
LabelColumns(&Array)
```

Description

Use this method to set the display label for one or more columns in a grid.

The LabelColumns method of the Grid class can provide a noticeable performance improvement over multiple calls to set the Label property of the GridColumn class. Each call manipulating a grid (either using a Grid class method or setting a GridColumn property) has a significant, and similar performance overhead. Therefore, one key to increasing the performance of PeopleCode programs manipulating grids is to reduce the number of these calls. Performance testing data suggests that if your program is changing three or more columns, use one of the Grid class methods, such as the LabelColumns method, instead of setting the column properties directly. The single call to the Grid class method offsets the small overhead of creating and populating the required array.

Parameters

Parameter	Description
<i>&Array</i>	Specify a two-dimensional array containing the column name and a value for the column label.

Returns

None.

Example

```
&ARLabel= CreateArrayRept(CreateArrayRept("", 2), 0);  
&ARLabel.Push(CreateArray("JOB_DETAIL", "Job Detail"));  
&ARLabel.Push(CreateArray("JOB_TIME", "Job Time"));  
&myGrid.LabelColumns(&ARLabel);
```

Related Topics

- [Label property: GridColumn class](#)

SetProperties method: Grid class

Syntax

```
SetProperties(&Array)
```

Description

Use this method to set multiple properties (column enabled, column visibility, and column label) for one or more columns in a grid.

The `SetProperties` method of the `Grid` class can provide a noticeable performance improvement over multiple calls to set individual properties of the `GridColumn` class. Each call manipulating a grid (either using a `Grid` class method or setting a `GridColumn` property) has a significant, and similar performance overhead. Therefore, one key to increasing the performance of PeopleCode programs manipulating grids is to reduce the number of these calls. Performance testing data suggests that if your program is changing three or more columns, use one of the `Grid` class methods, such as the `SetProperties` method, instead of setting the column properties directly. The single call to the `Grid` class method offsets the small overhead of creating and populating the required array.

Parameters

Parameter	Description
<i>&Array</i>	Specify a four-dimensional array containing the column name, a value (Y/N) indicating whether the column is enabled, a value (Y/N) indicating whether the column is visible, and a value for the column label.

Returns

None.

Example

```
&ARProp= CreateArrayRept(CreateArrayRept("", 4), 0);  
&ARProp.Push(CreateArray("JOB_DETAIL", "Y", "Y", "Job Detail"));  
&ARProp.Push(CreateArray("JOB_TIME", "Y", "Y", "Job Time"));  
&mygrid.SetProperties(&ARProp);
```

Related Topics

- [Enabled property: GridColumn class](#)
- [Label property: GridColumn class](#)
- [Visible property: GridColumn class](#)

SetRowHeader method: Grid class

Syntax

```
SetRowHeader(&array_of_cols)
```

Description

Use the `SetRowHeader` method to set grid column headers for screen reader mode (for the entire grid when there are no tab separators or for each tab separator when tab separators are present).

Parameters

Parameter	Description
<i>&array_of_cols</i>	Specifies an array of string values containing the column names to be set as row headers. A column name is the Page Field Name of the field for the column. In the case of a grid with no tab separators, this array can contain up to two column names. In the case of a grid with tab separators, this array can contain up to two column names for each tab separator with the column name to be selected from the group of columns under control of that tab separator.

Returns

(Optional) A Boolean value: True if the method executed successfully; False otherwise.

Example 1

The following example is for a grid without tab separators:

```
Local Grid &MYGRID;

&MYGRID = GetGrid(%Page, "QRY_VIEWERS_WRK");
&GridRowHeaders = CreateArrayRept("", 0);
&GridRowHeaders.Push("QRYNAME");
&GridRowHeaders.Push("DESCR");
&MYGRID.SetRowHeader(&GridRowHeaders);
```

Example 2

The following example is for a grid with two tab separators:

```
Local Grid &MYGRID;

&MYGRID = GetGrid(%Page, "PSCONQRSSRCH_VW");
&GridRowHeaders = CreateArrayRept("", 0);
&GridRowHeaders.Push("CONQRSNAME");
&GridRowHeaders.Push("DESCR");
&GridRowHeaders.Push("QRYOWNERTRANS");
&MYGRID.SetRowHeader(&GridRowHeaders);
```

Related Topics

- [RowHeader property: GridColumn class](#)
- Application Designer Developer's Guide: Setting Grid General Properties
- Application Designer Developer's Guide: Creating Tabbed Grids

ShowColumns method: Grid class

Syntax

```
ShowColumns(&Array)
```

Description

Use this method to set the visibility for one or more columns in a grid.

The ShowColumns method of the Grid class can provide a noticeable performance improvement over multiple calls to set the Visible property of the GridColumn class. Each call manipulating a grid (either using a Grid class method or setting a GridColumn property) has a significant, and similar performance overhead. Therefore, one key to increasing the performance of PeopleCode programs manipulating grids is to reduce the number of these calls. Performance testing data suggests that if your program is changing three or more columns, use one of the Grid class methods, such as the ShowColumns method, instead of setting the column properties directly. The single call to the Grid class method offsets the small overhead of creating and populating the required array.

Parameters

Parameter	Description
<i>&Array</i>	Specify a two-dimensional array containing the column name and a value (Y/N) indicating whether the column is visible.

Returns

None.

Example

```
&ARShow= CreateArrayRept(CreateArrayRept("", 2), 0);  
&ARShow.Push(CreateArray("JOB_DETAIL", "Y"));  
&ARShow.Push(CreateArray("JOB_TIME", "Y"));  
&myGrid.ShowColumns(&ARShow);
```

Related Topics

- [Visible property: GridColumn class](#)

Grid Class Properties

The properties in this section are described in alphabetical order.

FreeFormStyleName property: Grid class

Description

Use this property to set or return a String representing the free form style (or styles) for the grid as previously set by this property.

This property is read/write.

Note

Styles for this grid set in Application Designer are not accessible through the `FreeFormStyleName` property.

Important

Use this property within fluid applications only.

Example

```
PTS_SRCH.PTS_RIGHTPNEL_RSLT.FreeFormStyleName = "psc_margin-left2em";
```

gridcolumn property: Grid class

Description

If a grid column name is used as a property, it accesses the grid column with that name. This means the following code:

```
&Mycolumn = &MyGrid.gridcolumnname;
```

acts the same as

```
&Mycolumn = &MyGrid.GetColumn(columnname);
```

This property is read-only.

Label property: Grid class

Description

This property returns a string specifying the label that appears as the title of the grid.

Note

You can't use this property to set labels longer than 100 characters. If you try to set a label of more than 100 characters, the label is truncated to 100 characters. Always put any changes to labels in the `Activate` event. This way the label is set every time the page is accessed.

This property is read/write.

Layout property: Grid class

Description

Use this property to set or return an Integer representing the grid layout type. The value can be one of the following constants:

Numeric Value	Constant Value	Description
0	%OriginalGrid	Not used in fluid applications.
1	%ScrollableGrid	Not used in fluid applications.
2	%ListGrid	Used on fluid pages to contain an unordered list grid.
3	%DataGrid	Used on fluid pages to contain a data grid.
4	%DivGrid	Used on fluid pages to contain a div grid.
5	%OriginalFlexGrid	Used on fluid pages to contain a flex grid.
6	%ClassicListGrid	Not used in fluid applications.
7	%ClassicOrderedListGrid	Not used in fluid applications.
8	%ClassicPresentationGrid	Not used in fluid applications.
9	%OrderedListGrid	Used on fluid pages to contain an ordered list grid.
10	%MenuGrid	Used on fluid pages as a container for a pop-up menu. See Fluid User Interface Developer's Guide: Creating Fluid Pop-up Menus.
11	%TabSetGrid	Used on fluid pages as a container for sectional tabs. See Fluid User Interface Developer's Guide: Creating Sectional Tabs on a Page.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

```
Local Grid &LGrid = GetGrid(Page.QE_NUI_GRIDLAYOUT, "PCODEGRID");
Local string &Devicetype;
```

```
&Devicetype = %Request.BrowserDeviceType;
```

```
Evaluate &Devicetype
```

```
When "pc"
```

```
  If %Request.BrowserTypeClass = "chrome" Then
```

```
    &LGrid.Layout = %DataGrid;
```

```
  Else
```

```
    &LGrid.Layout = %DivGrid;
```

```
End-If;  
When "phone"  
    &LGrid.Layout = %OriginalFlexGrid;  
When "tablet"  
    &LGrid.Layout = %ListGrid;  
End-Evaluate;
```

Related Topics

- Application Designer Developer's Guide: Setting Grid Use Properties

PersistMenuOption property: Grid class

Description

Use this property to set or return a Boolean value specifying the *persistent search* property for this grid. This corresponds to the "Persist In Menu" option for the grid that can be set in Application Designer. When this property is True, the most recent transaction search is stored and the search results are accessible through the drop-down navigation menu structure.

This property is read/write.

Example

```
&MyGrid = GetGrid(Page.GRIDCHECK, "GRIDNO");  
&MyGrid.PersistMenuOption = True;  
  
MessageBox(0, "", 0, 0, "Persist In Menu = " | &MyGrid.PersistMenuOption);
```

Related Topics

- Application Designer Developer's Guide: Setting Grid Use Properties

RowHighlight property: Grid class

Description

Use this property to set or return a Boolean value indicating whether row highlighting has been enabled or disabled for the grid.

By default, when a grid has more than one row, and an end user hovers the mouse over a row or selects the row, the system highlights that row to indicate it is the row of current focus. However, this can be distracting or unnecessary for some interfaces for varying reasons, such as the number of rows in the grid, the form factor of the device displaying the page, and so on.

This property is read/write.

Example

In the following example, the first grid's row highlighting behavior is enabled; the second grid's row highlighting behavior is disabled.

```
*Within a page's Activate event */  
  
Local Grid &MYGRID1;  
Local Grid &MYGRID2;
```

```
&MYGRID1 = GetGrid(Page.USER_SELF_SERVICE, "PSUSEREMAIL");  
&MYGRID1.RowHighlight = True;  
&MYGRID2 = GetGrid(Page.USER_SELF_SERVICE, "MCF_IM_XMPP_CFG");  
&MYGRID2.RowHighlight = False;
```

Related Topics

- Application Designer Developer's Guide: Setting Grid Use Properties

Selector property: Grid class

Description

Use this property to set or return the row action for a grid as it relates to the PeopleTools-generated row selector field. In brief, the row action indicates whether clicking or tapping anywhere in the row (selecting the row) is equivalent to selecting just the selector field. A "selector field" is either a radio button (for single row selection) or a check box (for multiple row selection). See Application Designer Developer's Guide: Setting Grid Use Properties, and the Row Selection Indicator on the Use tab of the Grid Properties dialog box for more information.

This property can be used on all fluid grid types with some restrictions. In addition, setting this property on a grid that has the Row Selection Indicator set to "No Selection Indicator" has no effect.

The value of the Selector property can be one of the following constants:

Numeric Value	Constant Value	Description
0	%GridSelNone	Indicates that no row action is enabled. This the default value. Note: If you have a push button or hyperlink field in the grid that includes the "Execute PC on Row/Group Click" setting (on the page field's Use tab), this selector setting is ignored.
1	%GridSelRowAction	Indicates that selecting the row is equivalent to selecting the selector field for the row. Users can select the row, which selects the selector field (either sets a radio button to on, or toggles the state of a check box) as well as sets input focus to the selector field. Other than the visual change to the selector field, there are no additional rendering or behavioral changes. No server trip is performed upon selecting the row (or the selector field). Note: If you have a push button or hyperlink field in the grid that includes the "Execute PC on Row/Group Click" setting (on the page field's Use tab), this selector setting is ignored.

Numeric Value	Constant Value	Description
2	%GridSelControl	Allows you to use the grid as a dynamic collection of either radio buttons or check boxes (depending on the setting on the grid's Use tab). The label of the selector field is set to the text value of the first visible field (edit field, long edit field, group box (and its contents), and so on) in the grid row, which is particularly important for accessibility purposes. Users can select this label, which selects the selector field (either sets a radio button to on, or toggles the state of a check box) as well as sets input focus to that field. Unlike the %GridSelRowAction, this mode can support invoking a server trip when the row or selector field is selected. This simulates the selector field being in interactive mode. To configure this, create a push button or hyperlink as a "trigger field" in the grid. Set the "Execute PC on Row/Group Click" setting on the field's Use tab. Then, define a FieldChange PeopleCode program on this trigger field. However, this trigger field must not be the first column in the grid, which allows this field to be automatically hidden; do not override this automatic behavior and unhide this field. Important: This mode is supported for div grids and list grids only, not for flex grids.

This property is read/write.

 Important

Use this property within fluid applications only.

Example

```
&grd1.Selector = %GridSelRowAction;
```

Related Topics

- Application Designer Developer's Guide: Setting Grid Use Properties

SummaryText property: Grid class

Description

Use this property to set or return a string representing the summary text for the grid.

Summary text enables you to provide a brief description of the functionality and content of the grid area. This property is pertinent for users who access the application in screen reader mode.

This property is read/write.

Example

```
&MyGrid = GetGrid(Page.PSXLATMAINT, "PSXITMMNT_VW");  
&MyGrid.SummaryText = "This is the new summary text through PeopleCode";
```

Related Topics

- Application Designer Developer's Guide: Setting Grid Label Properties

GridColumn Class

Grid columns are page fields that comprise a grid, which is itself a page field. Similarly, a group of GridColumn objects comprises a Grid object. The GridColumn class enables you to change grid column attributes without having to write PeopleCode that loops through every row of the grid.

This class has no methods or built-in functions, only properties.

Note

To use a GridColumn object, you must instantiate it from a grid object. This requires you to first instantiate a Grid object using the GetGrid built-in function.

You create an analytic grid column object from the analytic grid class. However, the analytic grid column class has the same properties as the grid column class. Any differences are noted in the documentation.

See PeopleCode Language Reference: GetGrid function.

GridColumn Class Properties

In this section, we discuss each GridColumn class property.

Enabled property: GridColumn class

Description

This property specifies whether the fields in the column are enabled (that is, can be edited) or if they are "disabled", that is, not editable. All columns are enabled by default.

Note

For an analytic grid column, the Enabled property only works with cubes, not dimensions.

This property is read/write.

Example

```
If Not &ValidID Then
    &MYGRID = GetGrid(PAGE.EMPLOYEE_CHECKLIST, "EMPL_GRID");
    &MYGRIDCOLUMN = &MYGRID.GetColumn("CHECKLIST_ITEMCODE");
    &MYGRIDCOLUMN.Enabled = False;
End-If;
```

The EnableColumns and SetProperty methods of the Grid class can provide a noticeable performance improvement over multiple calls to set the Enabled property of the GridColumn class.

Related Topics

- [EnableColumns method: Grid class](#)
- [SetProperties method: Grid class](#)

IncludeLabelsInGridCells property: GridColumn class

Description

This property returns the current setting of the grid column, that is, whether the labels are displayed on grid columns as specified by the **Include Labels in Grid Cells** option on the Fluid tab of the Grid Properties page. You can use this property either to display the labels in the grid column or not to display the labels based on the user's accessibility setting. You can set it to True (to display the labels) or False (*not* to display the labels).

This property is read/write.

Example

In the following example, the code will toggle the IncludeLabelsInGridCells property to On if it's Off or to Off if it's On.

```
&Grid6 = GetGrid(Page.QE_PAGE_2, "QE_WORK_REC6");
&PayComp = &Grid6.GetColumn("QE_PAY_COMP_CD");

If &PayComp.IncludeLabelsInGridCells Then
    &PayComp.IncludeLabelsInGridCells = False;
Else
    &PayComp.IncludeLabelsInGridCells = True;
End-If;
```

IsUserHidden property: GridColumn class

Description

This property specifies whether a user hid a grid column in grid personalization.

Note

If the visible property of a grid column is set to true, and if it is also set to IsUserHidden, then the grid column is not displayed to the user at runtime.

This property is read-only.

Example

```
If &StatCol.IsUserHidden Then
    WinMessage("Status column is User Hidden");
Else
    WinMessage("Status Column is Not User Hidden");
End-If;
```

Related Topics

- [Visible property: GridColumn class](#)

Label property: GridColumn class

Description

This property specifies the display label for the GridColumn object, as distinct from the grid column's Record Field Name or Page Field Name. This property overrides the equivalent settings on the Label tab of the grid column's Page Field Properties.

Note

You can't use this property to set labels longer than 100 characters. If you try to set a label of more than 100 characters, the label is truncated to 100 characters. If you change the column label, then change the field label, you may overwrite the column label with the field label. The grid object is part of a page, *not* the data buffers, while the field is part of the data buffers. To avoid this problem, always put any changes to column labels in the Activate event. This way the label is set every time the page is accessed.

This property is read/write.

Example

```
&MYGRIDCOLUMN.Label = "Checklist Item";
```

The `LabelColumns` and `SetProperties` methods of the `Grid` class can provide a noticeable performance improvement over multiple calls to set the `Label` property of the `GridColumn` class.

Related Topics

- [LabelColumns method: Grid class](#)
- [SetProperties method: Grid class](#)

Name property: GridColumn class

Description

This property returns the name of the grid column, as a string. This value comes from the `Page Field Name` on the `General` tab in the `Page Field Properties` of the `GridColumn` object executing the property. This property was the value used to instantiate the `GridColumn` object.

This property is read-only.

Example

```
&PF_NAME = &MYGRIDCOLUMN.Name;
```

RowHeader property: GridColumn class

Description

Use this property to return a Boolean value indicating whether the grid column field is row a header.

This property is read-only.

Example

```
Local Grid &MYGRID;  
Local GridColumn &MYGRIDTYPECOLUMN;  
  
&MYGRID = GetGrid(Page.QE_GRID_API, "QE_ABSENCE_HIST");  
&MYGRIDTYPECOLUMN = &MYGRID.GetColumn("QE_ABSENCE_TYPE");  
If (&MYGRIDTYPECOLUMN.RowHeader) Then  
    WinMessage("QE_ABSENCE_TYPE is a row header.");  
Else  
    WinMessage("QE_ABSENCE_TYPE is not a row header.");  
End-If;
```

Related Topics

- [SetRowHeader method: Grid class](#)
- Application Designer Developer's Guide: Setting Grid General Properties

Visible property: GridColumn class

Description

This property specifies whether a grid column is visible or hidden. Set this property to False to hide the grid column, and to True to unhide the grid column. This property defaults to True.

The Visible property also hides grid columns that are displayed as tabs in the PeopleSoft Pure Internet Architecture.

If you specify "Show Column on Hide Rows" in Application Designer, the column headers and labels of a grid display at runtime, even when the rest of the column is hidden. You can't override this value using PeopleCode.

Note

For an analytic grid column, this property is only valid if the column is bound to a dimension on a slicer, and bound to a cube that is on the column axis.

This property is read/write.

Note

In previous releases of PeopleTools, the methodology for hiding a grid column was to use the Hide function in a loop to hide each cell in the column, one row at a time. This method of hiding grid columns still works. However, your application will experience deteriorated performance if you continue to use this method.

Example

```
&MYGRIDCOLUMN.Visible = False;
```

The following example checks for the value of a field in every row of the grid. If that value is "N" for every row, the column is hidden.

```
&RS = GetRowset(Scroll.EX_SHEET_LINE);  
&HIDE = True;  
While (&HIDE)  
  
    For &I = 1 To &RS.ActiveRowCount;  
        &OUT_OF_POLICY = &RS(&I).EX_SHEET_LINE.OUT_OF_POLICY.Value;  
        &NO_RECEIPT_FLG = &RS(&I).EX_SHEET_LINE.NO_RECEIPT_FLG.Value;  
        If &OUT_OF_POLICY = "Y" Then  
            &OUT_OF_POLICY_HIDE = False;  
            &HIDE = False;  
        End-If;  
  
        If &NO_RECEIPT_FLG = "Y" Then  
            &NO_RECEIPT_HIDE = False;  
            &HIDE = False;  
        End-If;  
    End-For;  
End-While;
```

```
        End-If;  
    End-For;  
  
    If &HIDE = True Then  
        &HIDE = False;  
    End-If;  
  
End-While;  
  
If Not (&OUT_OF_POLICY_HIDE) Then  
    GetGrid(Page.EX_SHEET_LINE_APV1, "EX_SHEET_LINE").OUT_OF_POLICY.Visible =  
    True;  
Else  
    GetGrid(Page.EX_SHEET_LINE_APV1, "EX_SHEET_LINE").OUT_OF_POLICY.Visible =  
    False;  
End-If;  
  
If Not (&NO_RECEIPT_HIDE) Then  
    GetGrid(Page.EX_SHEET_LINE_APV1, "EX_SHEET_LINE").NO_RECEIPT_FLG.Visible =  
    True;  
Else  
    GetGrid(Page.EX_SHEET_LINE_APV1, "EX_SHEET_LINE").NO_RECEIPT_FLG.Visible =>  
    False;  
End-If;
```

The ShowColumns and SetProperty methods of the Grid class can provide a noticeable performance improvement over multiple calls to set the Visible property of the GridColumn class.

Related Topics

- [ShowColumns method: Grid class](#)
- [SetProperties method: Grid class](#)


Internet Script Classes (iScript)

Understanding Internet Script Classes

An Internet Script, also called an iScript, is a specialized PeopleCode function that generates dynamic web content. iScripts interact with web clients (browsers) using a request-response paradigm based on the behavior of the Hypertext Transfer Protocol.

iScripts work with PeopleSoft Pure Internet Architecture. You must have PeopleSoft Pure Internet Architecture set up correctly before you can run an iScript.

The following flow chart shows the interaction of an iScript (PeopleCode) in a PeopleSoft Pure Internet Architecture application.

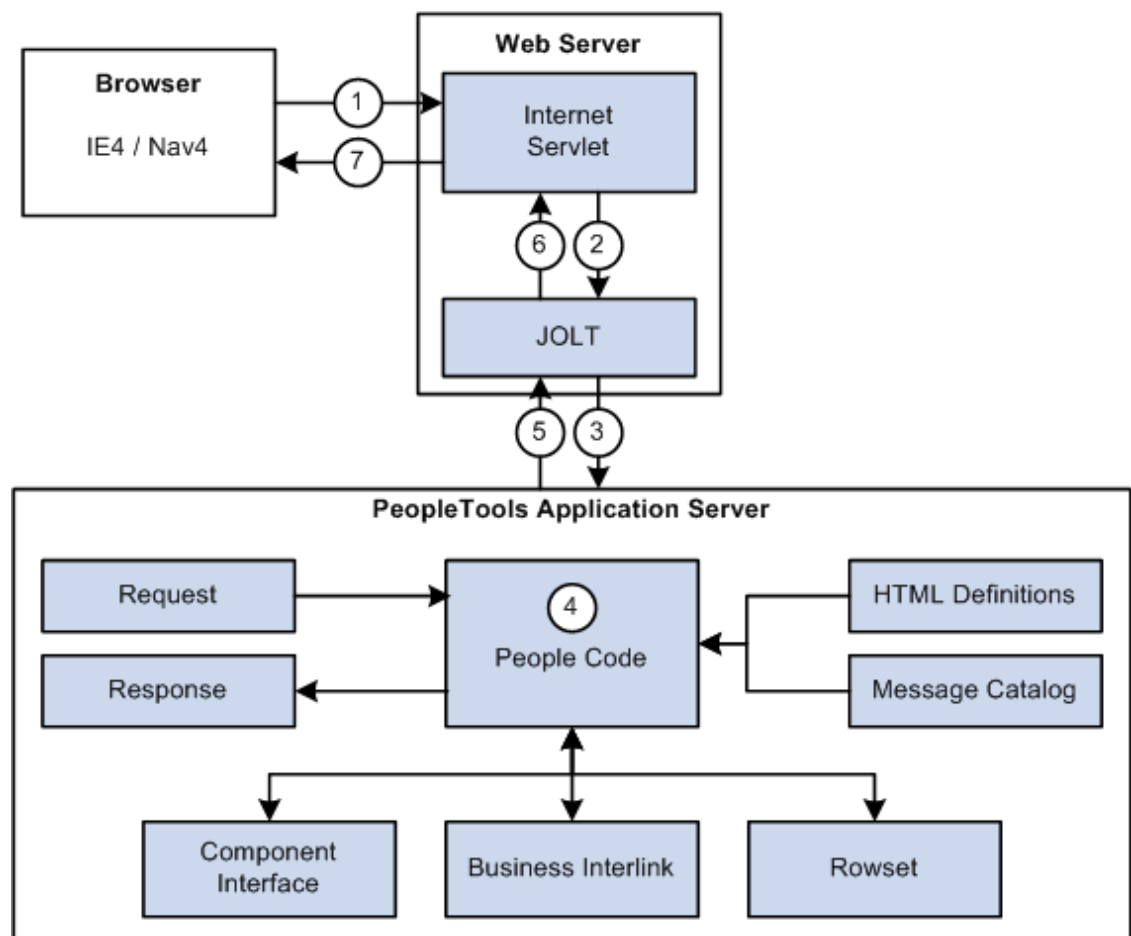

1. An HTTP request arrives at the web server specifying in its URL the Presentation Relay Servlet (psc). The path information included in the URL specifies which PeopleCode

program to run. No component is specified because none is needed. The PeopleCode program (iScript) runs directly. The following is an example of the URL:

```
http://serverx/Servlets/psp/ps84/e_procurement/fdm/s/  
WEBLIB_BEN_401k.PAGES.Field⇒  
Formula.IScript_Home401k
```

2. The psc servlet is invoked by the web server. It serializes all necessary information from the web server request and response objects, then makes a call through JOLT to the PeopleSoft application server service passing the serialized object information.
3. The application server unpacks all of the object information and creates PeopleSoft versions of the Request and Response objects. It then calls the function in the PeopleCode program specified in the URL. The PeopleCode Request and Response objects are available to the PeopleCode program through the system variables %Request and %Response.
4. The PeopleCode program is then responsible for generating every aspect of the HTML page that is to be returned to the browser. It has access to the Request object to view items such as query string parameters, cookies, and headers. It also has access to component interfaces, business interlinks, and Rowset objects to interact with applications. HTML definitions are available to include language sensitive blocks of HTML. They can also contain JavaScript. The message catalog is also available for language sensitive messages. The Response object is used to "write" the generated HTML back to the browser.
5. When the PeopleCode program is finished running, the headers, cookies, and HTML in the PeopleSoft Response object are serialized and returned through JOLT to the Presentation Relay Servlet.
6. The Presentation Relay Servlet then unpacks the Response information generated by the PeopleCode.
7. The servlet plays the information back to the web server response object, which in turn sends the response to the user's browser.

URL vs. URI

In this document, the term URL refers to the entire URL, that points to content. The following is an example of a URL:

```
http://someserver/servlets/psc/ps84/e_procurement/fdm/s/WEBLIB_Portal.Field⇒  
Change.IScript_DoSomething?page=view&key1=value1&key2=value2
```

A URI does not include the content information. Think of it as a subset of the URL that points to the location of the resource, but does not include any parameters passed to that resource. From the previous example, the URI portion of the URL is:

```
http://someserver/servlets/psc/ps84
```

Web Libraries

iScripts use the existing PeopleCode Function Library infrastructure. However, instead of naming your record FUNCLIB_xxx, all iScripts *must* be contained in records named WEBLIB_xxx. All of the existing tools and techniques for working with function libraries (such as Upgrade, Find In, Rename, and so on) also apply to Web Libraries.

See PeopleCode Developer's Guide: Accessing PeopleCode External Functions.

To create an iScript:

1. Create or extend a domain specific WEBLIB (funclib).

WEBLIBs are derived/work record definitions that have their name prefixed with WEBLIB_.

2. Add a function to a WEBLIB.

The name of your function *must* be prefaced with IScript_. For example:

IScript_HelloWorld

IScript_FuncHRPage

Note


iScript functions take no arguments, and do not return a value.

The following iScript writes data.

```
Function IScript_HPDefaultCategories()  
    &ClearDotImage = %Response.GetImageURL(Image.PT_PORTAL_CLEAR_DOT);  
    &CatHTML = GetHTMLText(HTML.PORTAL_HP_CATEGORY, &ClearDotImage,  
GetCategories⇒  
    ());  
    %Response.Write(&CatHTML);  
End-Function;
```

The following iScript uses both the request and response objects to echo what the user types into an edit control.

This example illustrates the fields and controls on the Example iScript. You can find definitions for the fields and controls later on this page.

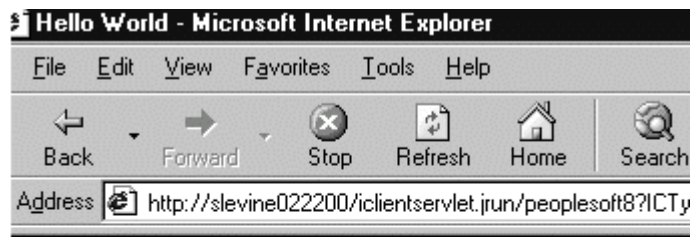

Hello World

Say this!

You said: hi!

```
Function IScript_HelloWorld()
%Response.WriteLine("<html><head><title>Hello World</title></head><body>");
    %Response.WriteLine("<h1>Hello World</h1>");
    %Response.WriteLine("<form method=POST action = " | %Request.FullURI | "?"
| =>
    %Request.QueryString | "><input type=submit value='Say this!.'>&nbsp;<input
type=>
edit name=WhatYouSaid value=" | %Request.GetParameter("WhatYouSaid") | "><=>
/form>");
    rem echo back what the user typed into the edit box...;
    %Response.WriteLine("<p><font face='Arial, Helvetica' size='5'
color='blue'=>
>You said: ");
    %Response.WriteLine(%Request.GetParameter("WhatYouSaid"));
    %Response.WriteLine("</body></html>");
    Return;
End-Function;
```

iScript Security

iScripts are secured on your system similar to Component Interfaces. After you create a WEBLIB record, and your functions, you must add them just as you would add a page to an application.

To add security to an iScript :

1. Navigate to the Maintain Security page and open the Permission List to which you want to give access.
2. Select Web Libraries.

You may need to scroll through the tabs at the top of the page to access the Web Libraries tab.

3. (Optional) Add new WebLibrary for Permission List.

If this is a new Web Library, you must add it to the permission list. Click the plus button to add a new Web Library, then select the library you want to add from the drop-down list box.

4. Select **Edit** for the Web Library you want to grant access for.
5. Select the access you want to give each function in the WEBLIB record.

From the page that displays, you can choose to allow or disallow access on a per function basis. The buttons on the side of the page either grant or disallow access for all functions.

See *PeopleTools: Security Administration*.

When to Use an iScript

iScripts give you complete control over the HTML sent to the browser. This enables flexibility in creating a user interface. However, there are some responsibilities that you inherit when choosing to use iScripts.

- You are responsible for creating HTML and JavaScript that is cross-browser compatible.
- You are responsible for ensuring that all the text sent to the browser is stored in either the message catalog or in HTML definitions to enable translation of the text.
- iScripts aren't part of the regular Component Processor flow, so you are responsible for accessing the database in a multi-language, multi-market, and multi-currency sensitive way. (Do this by using a Component Interface to access the database.)

For these reasons, PeopleSoft recommends that you first try to build a page in Application Designer. This approach enables PeopleTools to generate all of the HTML in a cross-browser, multi-language, multi-market, and multi-currency sensitive way.

You don't have to use an iScript to generate an entire page. You can use the Request and Response objects with an HTML area, so you can develop a portion of your HTML using the iScript objects, while allowing the majority of it to be generated by the Component Processor. If you use this method, instead of using the Response object's Write and WriteLine methods to output your HTML, you set the value of the HTML area to the HTML that you want to display. Remember, that just as with an iScript, you must ensure that the HTML you generate is cross-browser compatible and multi-market sensitive.

So when *should* you use iScripts? Here are two scenarios where iScripts would be an appropriate choice:

- The page being developed *cannot* be built using Application Designer. An example of this is a page that requires more than one HTML form. PeopleSoft Pure Internet Architecture places the entire page inside of a single form tag, so no other HTML form tags can be added. In this case the requirements of the page can't be met by pages created in Application Designer, so use iScripts instead.

Note

You should use Component Interfaces for all database access so you have multi-language and multi-currency sensitivity.

- The page being developed never accesses the database. Using a page and Component Processor for this type of page incurs unnecessary processing overhead. An example of this is a page that talks to another website and redisplay HTML from the remote site.

Style Sheets and Styles

PeopleSoft recommends that developers using the iScripts always use styles (also known as classes) defined in the style sheets to specify the attributes (that is, background color, font,

size, alignment, borders, and so on) of objects referenced in the iScripts. The Response object provides access to Style Sheets stored in the PeopleSoft database.

Related Topics

- Application Designer Developer's Guide: Understanding Style Sheets and Style Classes

Other Considerations

PeopleSoft does not recommend using the following technologies in iScripts:

- Java applets
- Browser plug-ins

Details of an iScript URL

Viewing an iScript requires the assembly of a URL with the following pieces:

Section	Description
http://Server/	The scheme (http / https) and web server name.
servlet_name/	The name of the physical servlet that the web server invokes to handle the request. This is either psp or psc.
SiteName/	The user-defined site name. This is defined during the installation of PIA. This enables you to set up multiple sites on one physical web server.
PortalName/	The name of the portal to use for this request. The portal object contains metadata that describes how to present the content (that is, template, pagelets and so on.)
NodeName/	The name of the node that contains the content for this request.
content_type/	The type of the content for this request. For iScripts, this is "s".
content_id	The identification of the content. This, and the type is the unique key to the content being retrieved.
?content_parm	The query string parameters (name value pairs) for the content.

For an iScript, the *content_id* has the following form:

Record.Field.Event.Function

The following is an example of the call to an iScript:

```
http://mlee2038//psp/PS84/e_procurement/fdm/s/  
WEBLIB_Portal.PORTAL_HEADER.Field⇒  
Formula.iScript_UniHeader_PIA
```

The Generate Functions

There are many different types of content on the portal, such as components, iScripts, homepages, and so on. Sometimes you want to access this content directly, through the URL that points to this content. To do this, PeopleSoft provides several Generate functions that generate the URL for the specified content.

The Generate functions can be categorized as:

- Content type.
- Absolute or relative URL.
- Portal service or content servlet (psp or psc).

The following is a list of the functions, plus a description of what to use them for. More information about a function is found under that function's description in the section PeopleCode Built-in Functions.

Function Name	Content Type	Absolute or Relative URL	Portal service or content servlet
GenerateActGuideContentUrl	Activity Guide	Absolute	psc
GenerateActGuidePortalUrl	Activity Guide	Absolute	psp
GenerateActGuideRelativeUrl	Activity Guide	Relative	NA
GenerateComponentContentURL	Component	Absolute	psc
GenerateComponentContentRelURL	Component	Relative	psc
GenerateComponentPortalURL	Component	Absolute	psp
GenerateComponentPortalRelURL	Component	Relative	NA
GenerateComponentRelativeURL	Component	Relative	NA
GenerateExternalPortalURL	External	Absolute	psp
GenerateExternalRelativeURL	External	Relative	NA
GenerateHomepagePortalURL	Homepage	Absolute	psp
GenerateHomepageRelativeURL	Homepage	Relative	NA
GenerateQueryContentURL	WQuery	Absolute	psc
GenerateQueryPortalURL	Query	Absolute	psp
GenerateQueryRelativeURL	Query	Relative	NA

Function Name	Content Type	Absolute or Relative URL	Portal service or content servlet
GenerateScriptContentURL	iScript	Absolute	psc
GenerateScriptContentRelURL	iScript	Relative	psc
GenerateScriptPortalURL	iScript	Absolute	psp
GenerateScriptPortalRelURL	iScript	Relative	psp
GenerateScriptRelativeURL	iScript	Relative	NA
GenerateWorklistPortalURL	Worklist	Absolute	psp
GenerateWorklistRelativeURL	Worklist	Relative	NA

Related Topics

- [PeopleCode Language Reference: Functions by Category](#)

Error Handling

All errors are handled through the session object. You should check the PSMessages collection to see if there are any errors in your code.

Note

Exit(1) does *not* rollback iScript transactions. To rollback in an iScript, you can use the SqlExec built-in function with the parameter of ROLLBACK (SQLEXEC("ROLLBACK")) or the MessageBox built-in function with a message error severity of error. You can also use the built-in function Error, but only if you are not sending HTML or XML in the error text itself.

Related Topics

- [Error Handling](#)
The session object handles error processing for all the APIs, such as Component Interfaces, the Query API, and so on. From the session object, you can check if there have been any errors.

Scope of the Internet Script Classes

The Request, Response, and Cookie classes can be accessed only from PeopleCode. They can be used only as part of a PeopleSoft Pure Internet Architecture application—either as part of a page created in Application Designer or an iScript. An iScript is always contained in a WEBLIB record. You wouldn't use any of these objects in an Application Engine program, a Component Interface, and so on. However, an iScript could call and start a Component Interface, a Business Interlink, and so on.

To access the Request or Response object, use the %Request and %Response system variable. These variables are objects, so you use them with dot notation.

```
%Response.SetContentType("text/HTML");
```

```
If %Request.GetParameter("encode") <> "" Then
```

Data Types of the iScript Classes

Cookie objects are instantiated from Response object. You can declare the cookie object as data type cookie before any functions. You can also declare variables of type Response and Request, to assign the %Response and %Request system variables to local variables.

```
Local Cookie &Cookie;  
Local Response &Resp;  
Local Request &Req;  
Function IScript_SetCookie()  
    rem set a cookie called "MyCookie" to store my user id in it's value.  
    Make the cookie expire when the user's browser session expires;  
    &Resp = %Response;  
    &Req = %Request;  
    &Cookie = &Resp.CreateCookie("MyCookie");  
    &Cookie.Value = %UserId;  
    &Cookie.MaxAge = -1;  
End-Function;
```

Internet Script Classes

The following is a description of the PeopleCode classes, methods, and properties that you use to create an iScript.

Request Class

The Request object encapsulates all information from the request issued from the browser. This includes the URI, Query String, QueryString parameters, Cookies, and Headers. The properties for the Request object are read-only.

Parameters

Request parameters are name-value pairs sent by the client to the web server as part of an HTTP request. They include the pairs in the query string part of the URL, and data posted in a form, if the request was a post request. Multiple parameter values can exist for any given parameter name. The following methods are available to access parameters:

- GetParameter
- GetParameterNames
- GetParameterValues

The GetParameterValues method returns an array of String objects containing all the parameter values associated with a parameter name. The value returned from the GetParameter method equals the first value in the array of String objects returned by GetParameterValues.

All form data from both the query string and the post body are aggregated into the request parameter set. The order of this aggregation is that query string data appears before post body parameter data.

Response

The response object encapsulates all the information to be sent back to the browser. This includes the body of the response, content type, response headers, and cookies.

The response object also includes helper methods that retrieve HTML, Image, StyleSheet, and other objects from the database and move them to the web server, and returning strings that can be used to reference these objects in the response content.

The body of the response is created using the response object's Write and WriteLine methods. If the content type of the response is not explicitly set in the PeopleCode program, it defaults to "text/html".

Cookies

Cookies are data sent from the client to the server on every request that the client makes. Cookies are stored by the browser, either on disk or in memory, and returned to the server that originally set the cookie.

The Internet Script API makes available the name and value of each cookie that's sent with the request, through the Request object's GetCookieNames and GetCookieValue methods. The API also enables you to set new cookies (or alter existing cookies) through the Response object's CreateCookie method and the Cookie object's properties.

Internet Script Classes Built-in Functions

PeopleCode Language Reference: GenerateActGuideContentUrl function

PeopleCode Language Reference: GenerateActGuidePortalUrl function

PeopleCode Language Reference: GenerateActGuideRelativeUrl function

PeopleCode Language Reference: GenerateComponentContentRelURL function

PeopleCode Language Reference: GenerateComponentContentURL function

PeopleCode Language Reference: GenerateComponentPortalRelURL function

PeopleCode Language Reference: GenerateComponentPortalURL function

PeopleCode Language Reference: GenerateComponentRelativeURL function

PeopleCode Language Reference: GenerateExternalPortalURL function

PeopleCode Language Reference: GenerateExternalRelativeURL function

PeopleCode Language Reference: GenerateHomepagePortalURL function

PeopleCode Language Reference: GenerateHomepageRelativeURL function

PeopleCode Language Reference: GenerateQueryContentURL function

PeopleCode Language Reference: GenerateQueryPortalURL function

PeopleCode Language Reference: GenerateQueryRelativeURL function

PeopleCode Language Reference: GenerateScriptContentRelURL function

PeopleCode Language Reference: GenerateScriptContentURL function

PeopleCode Language Reference: GenerateScriptPortalRelURL function

PeopleCode Language Reference: GenerateScriptPortalURL function

PeopleCode Language Reference: GenerateScriptRelativeURL function

PeopleCode Language Reference: GenerateWorklistPortalURL function

PeopleCode Language Reference: GenerateWorklistRelativeURL function

Request Class Methods

In this section, we discuss the Request class methods. The methods are discussed in alphabetical order.

FormFactor method: Request class

Syntax

```
FormFactor(form_factor)
```

Description

Use the FormFactor method to return the ceiling (the maximum device width in physical pixels) defined in the web server's configuration files for the specified form factor.

! Important

Use this method within fluid applications only.

Parameters

Parameter	Description	
<i>form_factor</i>	Specifies the form factor as an integer. The value can be one of the following constants:	
Numeric Value	Constant Value	Default Ceiling (in physical pixels)
0	%FormFactor_Small	519
1	%FormFactor_Medium	759
2	%FormFactor_Large	959
3	%FormFactor_Xlarge	9999999

Returns

An Integer value.

Example

```
If %Request.FormFactor(%FormFactor_Small) <= 400 Then
    ...
End-If;
```

GetContentBody method: Request class

Syntax

```
GetContentBody()
```

Description**Note**

PeopleSoft Business Interlinks is a desupported product. This method currently exists for backward compatibility only.

This method retrieves the text content of an XML request. This is part of the incoming Business Interlink functionality, which enables PeopleCode to receive an XML request and return an XML response.

Parameters

None.

Returns

A string.

Example

The following example gets the XML text content of a request, then uses that as input to create a BiDoc. Then the BiDoc methods GetDoc and GetValue are used to access the value of the skills tag.

```
Local BIDocs &rootInDoc, &postreqDoc;
Local string &blob;
Local number &ret;
&blob = %Request.GetContentBody();
/* process the incoming xml(request)- Create a BiDoc */
&rootInDoc = GetBiDoc(&blob);
&postreqDoc = &rootInDoc.GetDoc("postreq");
&ret = &postreqDoc.GetValue("skills", &skills);
```

GetCookieNames method: Request class

Syntax

```
GetCookieNames()
```

Description

This method returns an array containing names of all the cookies present in this request. If there are no cookies in the request, an empty array is returned. When cookies are present, this method returns an array of strings.

GetCookieValue method: Request class

Syntax

```
GetCookieValue (name)
```

Description

This method returns a string containing value of the cookie identified *name*. The *name* parameter takes a string value. The NPmatch between *name* and the request cookie is case-insensitive. If there is no cookie in the request matching the name, an empty string is returned.

GetDeviceInfo method: Request class

Syntax

```
GetDeviceInfo(attribute)
```

Description

Use the GetDeviceInfo method to detect and return a value for the specified device attribute.

Important

Use this method within fluid applications only.

Parameters

Parameter	Description
<i>attribute</i>	Specifies one of the listed device attributes as a string value:
Attribute	Returns
width	The device's width in physical pixels.
height	The device's height in physical pixels.

Attribute	Returns
pixelratio	The ratio between physical pixels and device-independent pixels (dips) on the device.
touch	Whether the device supports touch events: • 1 – Supports • 0 – Does not support.
geolocation	Whether the device supports the geolocation API: • 1 – Supports • 0 – Does not support.
websockets	Whether the device supports the WebSockets API: • 1 – Supports • 0 – Does not support.
webworkers	Whether the device supports the Web Workers API: • 1 – Supports • 0 – Does not support.
datepicker	Whether the device supports the DatePicker widget: • 1 – Supports • 0 – Does not support.
dtpicker	Whether the device supports the DateTimePicker widget: • 1 – Supports • 0 – Does not support.
timepicker	Whether the device supports the TimePicker widget: • 1 – Supports • 0 – Does not support.
dnd	Whether the device natively supports drag-and-drop: • 1 – Supports • 0 – Does not support.
sessionstorage	Whether the device supports the sessionStorage object: • 1 – Supports • 0 – Does not support.
localstorage	Whether the device supports the localStorage object: • 1 – Supports • 0 – Does not support.
history	Whether the device supports the history API: • 1 – Supports • 0 – Does not support.
canvas	Whether the device supports the <canvas> element: • 1 – Supports • 0 – Does not support.
svg	Whether the device supports the Scalable Vector Graphics (SVG) format: • 1 – Supports • 0 – Does not support.
postmessage	Whether the device supports the method: • 1 – Supports • 0 – Does not support.
hc	Whether the device supports a high contrast mode: • 1 – Supports • 0 – Does not support.

Returns

An Integer value.

Example

```
&dev_info = %Request.GetDeviceInfo("width");
```

GetHeader method: Request class

Syntax

```
GetHeader(name)
```

Description

This method returns the value of the header requested by the string *name*. The match between *name* and the request header is case-insensitive. If the header requested does not exist, an empty string is returned.

Example

The following example gets the "Referer" header to see where the request came from:

```
&Referer = %Request.GetHeader("Referer");
```

GetHeaderNames method: Request class

Syntax

```
GetHeaderNames()
```

Description

This method returns an array of Strings representing the header names for this request.

GetHelpURL method: Request class

Syntax

```
GetHelpURL(HelpContext)
```

Description

This method returns the help context path (as a string) to the help directory. It's used to construct a URL to a specific help page.

Example

```
&HelpURLString = %Request.GetHelpURL("hc0110");
```

GetParameter method: Request class

Syntax

```
GetParameter(name)
```

Description

This method returns the value of a specified query string parameter or posted form data parameter. The match between *name* and the request parameter is case-insensitive. If there are multiple parameter values for a single name, the value returned is the first value in the array returned by the `GetParameterValues` method. If the parameter has (or could have) multiple values, you should use the `GetParameterValues` method in your Internet scripts.

Related Topics

- [GetParameterValues method: Request class](#)

GetParameterNames method: Request class

Syntax

```
GetParameterNames()
```

Description

This method returns all the parameter names for this request as an array of Strings, or an empty array if there are no input parameters.

GetParameterValues method: Request class

Syntax

```
GetParameterValues(name)
```

Description

This method returns the values of the specified parameter (*name*) as an array of Strings, or an empty array if the named parameter does not exist. The *name* parameter takes a string value.

Request Class Properties

In this section, we discuss the Request class properties. The properties are discussed in alphabetical order.

AuthTokenDomain property: Request class

Description

This property returns the web server domain as a string across which the single sign-in authentication token is valid. Use this property as the domain of any cookie which you want to apply across the same domain as the single sign-in token.

The value of this property is in the format:

`".example.com"`

Note that it begins with a dot "." character. You can use this format as the value of a cookie's domain property.

However, sometimes you cannot use a value that is prefixed with a dot character. For example, the javascript document.docmain property should not begin with a dot. In this case, you must strip it off manually in your code.

Note

The value of this property is the domain across which the authentication token is valid, set in the AuthTokenDomain configuration property in the configuration properties file. The value of the system variable %AuthenticationToken is the authentication token itself.

This property is read-only.

Related Topics

- PeopleCode Language Reference: %AuthenticationToken system variable

AuthType property: Request class

Description

This property corresponds to the CGI variable AUTH_TYPE. This variable does not necessarily contain a value, and may require special web server configuration to obtain non-empty values.

This property is read-only.

Related Topics

- [RemoteUser property: Request class](#)
- [ServletPath property: Request class](#)

BrowserDeviceFormFactor property: Request class

Description

Use this property to return the form factor of the device as an integer, which corresponds to one of the following constants:

Numeric Value	Constant Value
0	%FormFactor_Small
1	%FormFactor_Medium
2	%FormFactor_Large
3	%FormFactor_Xlarge

This property is read-only.

! Important

Use this property within fluid applications only.

Example

```
If %Request.BrowserDeviceFormFactor = %FormFactor_Small Then
    PTNUI_LP_HEADER.PTNUI_LOGO.LabelImage = Image.PTNUI_ORACLE_LOGO_SFF;
    PTNUI_LAND_WRK.GROUPBOX15.FreeFormStyleName = "psc_hidden";
End-If;
```

BrowserDeviceType property: Request class

Description

Use this property to return the device's type as a string value:

String Value	Description
pc	Desktop or laptop computer
phone	Phone
tablet	Tablet

This property is read-only.

! Important

Use this property within fluid applications only.

Example

```
Local Grid &LGrid = GetGrid(Page.QE_NUI_GRIDLAYOUT, "PCODEGRID");
Local string &Devicetype;
```

```
&Devicetype = %Request.BrowserDeviceType;
```

```
Evaluate &Devicetype
When "pc"
```

```
If %Request.BrowserTypeClass = "chrome" Then
    &LGrid.Layout = %DataGrid;
Else
    &LGrid.Layout = %DivGrid;
End-If;
When "phone"
    &LGrid.Layout = %OriginalFlexGrid;
When "tablet"
    &LGrid.Layout = %ListGrid;
End-Evaluate;
```

BrowserFluidCapable property: Request class

Description

Use this property to return a string indicating whether the browser is defined as fluid capable in the web server's configuration files.

This property is read-only.

Important

Use this property within fluid applications only.

Example

```
If %Request.BrowserFluidCapable <> "Y" Then
    ...
End-If;
```

BrowserPlatform property: Request class

Description

This property returns a string that represents the browser platform (WINXP, WIN8, WIN7, WINVISTA/WIN2008, WIN, MAC68K, MACPPC, MACIPAD, or MAC) that has been associated with the user agent as defined in the web server's configuration files.

This property is read-only.

BrowserPlatformClass property: Request class

Description

Use this property to return a string value that represents the platform class (win, ios, mac, or android) that has been associated with the user agent as defined in the web server's configuration files.

This property is read-only.

! Important

Use this property within fluid applications only.

Example

```
/* iPhone only to disable field zooming on focus */  
If %Request.BrowserDeviceFormFactor = 0 And  
    %Request.BrowserPlatformClass = "ios" Then  
    &str = "width=device-width,initial-scale=1.0,minimum-scale=1.0,user-  
scalable=no";  
End-If;
```

BrowserType property: Request class

Description

This property returns a string that represents the browser type (CHROME, Safari, FIREFOX, or IE) that has been associated with the user agent as defined in the web server's configuration files.

This property is read-only.

BrowserTypeClass property: Request class

Description

Use this property to return a string value that represents the browser type (chrome, safari, firefox, or IE) that has been associated with the user agent as defined in the web server's configuration files.

This property is read-only.

! Important

Use this property within fluid applications only.

Example

```
Local Grid &LGrid = GetGrid(Page.QE_NUI_GRIDLAYOUT, "PCODEGRID");  
Local string &Devicetype;  
  
&Devicetype = %Request.BrowserDeviceType;  
  
Evaluate &Devicetype  
When "pc"  
    If %Request.BrowserTypeClass = "chrome" Then  
        &LGrid.Layout = %DataGrid;  
    Else  
        &LGrid.Layout = %DivGrid;  
    End-If;
```

```
When "phone"  
    &LGrid.Layout = %OriginalFlexGrid;  
When "tablet"  
    &LGrid.Layout = %ListGrid;  
End-Evaluate;
```

BrowserVersion property: Request class

Description

This property returns a string describing the version of the browser that sent the request.

This property is read-only.

ByPassSignOn property: Request class

Description

This property returns a Boolean value, indicating what ByPassSignOn has been set to in the configuration properties file. If this value has been set to True, this property returns True, False otherwise.

This property is read-only.

ContentURI property: Request class

Description

This property returns a string containing the portion of the current URI before the portal name, and referencing the content servlet (psc).

For the URL:

```
http://localhost/psc/ps84/PORTAL/NODE/e_procurement/fdm/s/WEBLIB. . .
```

This property returns the following:

```
http://localhost/psc/ps84/
```

This property is read-only.

ExpireMeta property: Request class

Description

This property returns the refresh meta-tag string that contains the cmd=expire parameter (the ExpireMeta string.)

The following is an example of the ExpireMeta string:

```
<meta HTTP-EQUIV='Refresh' Target='_top' CONTENT='10; URL=/servlets/psp/ps84/?  
cmd=>  
expire'>
```

All Internet script pages should use this property to generate the meta tag to cause the page to expire. It is the same expiration tag used by pages originally created using Application Designer, unless the Internet script generates a menu link in a separate frame that is not supposed to expire.

This tag should be included in the <head> section of the HTML generated by the iScript.

This property is read-only.

Example

```
%Response.Write("<html><head>");  
%Response.Write(%Request.ExpireMeta);  
%Response.Write("</head><body>");
```

ExtraLarge property: Request class

Description

Use this property to return a string value that represents the ceiling (the maximum device width in physical pixels) defined in the web server's configuration files for the extra large form factor. The default value is 9999999.

Note

You can use the FormFactor method instead to return an integer value.

This property is read-only.

Important

Use this property within fluid applications only.

Related Topics

- [FormFactor method: Request class](#)

FullURI property: Request class

Description

This property returns the complete URI up to, but not including, the query string. This method returns a string value.

To return only the request URI (that is, without the scheme, server name or port) use the RequestURI method.

This property is read-only.

Example

From the following code

```
&FullURI = %Request.FullURI;
```

&FullURI might contain the following:

```
http://serverx/servlets/psp/ps84/Portal/Node/s/WEBLIB_TEST.SCRIPTS.Field⇒  
Formula.IScript_Test
```

Related Topics

- [RequestURI property: Request class](#)

HTTPMethod property: Request class

Description

This property returns the HTTP method as a string, (for example, GET, POST, PUT) by which this request was made.

This property is read-only.

Large property: Request class

Description

Use this property to return a string value that represents the ceiling (the maximum device width in physical pixels) defined in the web server's configuration files for the large form factor. The default value is 959.

Note

You can use the FormFactor method instead to return an integer value.

This property is read-only.

Important

Use this property within fluid applications only.

Related Topics

- [FormFactor method: Request class](#)

LogoutURL property: Request class

Description

This property returns the complete URL (as a string) to logout of the PeopleSoft session. Use this property to generate a link that causes a page to logout. You should normally not need to include this link on your page.

This property is read-only.

Medium property: Request class

Description

Use this property to return a string value that represents the ceiling (the maximum device width in physical pixels) defined in the web server's configuration files for the medium form factor. The default value is 759.

Note

You can use the `FormFactor` method instead to return an integer value.

This property is read-only.

Important

Use this property within fluid applications only.

Related Topics

- [FormFactor method: Request class](#)

PathInfo property: Request class

Description

This property returns any path information following the servlet path, but prior to the query string. This property returns null if there is no path information following the servlet path.

This property is read-only.

Example

For the URL:

`http://localhost/psp/ps84/PORTAL/NODE/e_procurement/fdm/s/WEBLIB. . .`

This property returns the following:

```
psp84/PORTAL/NODE/eprocurements/fdm/s/WEBLIB_ . . .
```

Protocol property: Request class

Description

This property returns the protocol being used for this request as a string in the following form:

protocol/major_version.minor_version

An HTTP 1.0 request, as defined by the HTTP 1.0 specification, should return the string HTTP/1.0. Use the Scheme property instead of the Protocol property when generating hrefs (links).

This property is read-only.

QueryString property: Request class

Description

This property returns the query string present in the request URL, if any. A query string is defined as any information following a ? character in the URL.

If there is no query string, this method returns null.

Use the request Parameters methods (GetParameterNames, GetParameterValues, GetParameter) to get the values of individual parameters on the query string.

This property is read-only.

RelativeURL property: Request class

Description

This property returns whether a relative URL should be generated for PeopleSoft Pure Internet Architecture pages. This property is set in the configuration properties file. This property takes a Boolean value: True if a relative URL is generated for PeopleSoft Pure Internet Architecture pages, False otherwise.

This property is read-only.

RemoteAddr property: Request class

Description

This property returns the IP address of the agent that sent the request.

This property is read-only.

RemoteHost property: Request class

Description

This property returns the fully qualified host name of the agent that sent the request.

Note

If remote client directives are set to always return an IP address, then this property returns an IP address instead of a fully qualified host name. See Portal Technology: Configuring Remote Client Directives for more information.

This property is read-only.

RequestURI property: Request class

Description

This property returns the URI, without the protocol.

This property is read-only.

Example

This example uses the following URL:

```
http://serverx/servlets/psc/ps84/PORTAL/NODE/fdm/s/WEBLIB_Portal. . .
```

From the following code

```
&MyRequestURI = %Request.RequestURI;
```

&MyRequestURI contains the following:

```
/servlets/psc/ps84/PORTAL/NODE/fdm/s/WEBLIB_PORTAL . . .
```

Use the following to build an absolute URL:

```
&myURL = %Request.Scheme | "://" | %Request.ServerName | ":" | %Request.Port  
| %Request.RequestURI | "?" | %Request.QueryString;
```

RemoteUser property: Request class

Description

This property corresponds to the CGI variable REMOTE_USER. It is not specific to your PeopleSoft implementation.

This variable does not necessarily contain a value, and may require special web server configuration to obtain non-empty values.

This value is generally populated when J2EE Authentication is enabled in the web-server configuration. The specific implementation of your web-server dictates how exactly this variable is populated. See your web-server specific documentation for more information.

This property is read-only.

Related Topics

- [AuthType property: Request class](#)
- [ServletPath property: Request class](#)

Scheme property: Request class

Description

This property returns the scheme, also known as the protocol, used by the request. Common schemes include http, https, ftp, and telnet. This property returns a string value.

This property is read-only.

Example

For the URL

```
http://serverx/servlets/psp/ps84/eprocurement/fdm/s/WEBLIB. . . .
```

the Scheme property returns:

```
http
```

ServerName property: Request class

Description

This property returns the host name of the server on which the servlet is running. This property returns a string value.

This property is read-only.

Example

For the URL

```
http://serverx/servlets/psp/ps84/eprocurement/fdm/s/WEBLIB. . . .
```

the ServerName property returns:

```
serverx
```

ServerPort property: Request class

Description

This property returns an integer representing the port on which the browser's request was received (that is, the port on which the server is listening.)

This property is read-only.

Example

For the URL

```
http://servername:80/servlets/iclientservlet/peoplesoft8/?ICType=Panel. . .
```

the ServerPort property returns:

80

ServletPath property: Request class

Description

This property corresponds to the CGI variable `SCRIPT_NAME`. This variable does not necessarily contain a value, and may require special web server configuration to obtain non-empty values.

This property is read-only.

Related Topics

- [AuthType property: Request class](#)
- [RemoteUser property: Request class](#)

Small property: Request class

Description

Use this property to return a string value that represents the ceiling (the maximum device width in physical pixels) defined in the web server's configuration files for the small form factor. The default value is 519.

Note

You can use the `FormFactor` method instead to return an integer value.

This property is read-only.

! Important

Use this property within fluid applications only.

Related Topics

- [FormFactor method: Request class](#)

Timeout property: Request class

Description

This property returns an integer representing the timeout value, in seconds, set in the configuration.properties file.

This property is read-only.

Response Class

The response object encapsulates all information to be returned from the iScript to the browser.

Response Class Methods

In this section, we discuss the Response class methods. The methods are discussed in alphabetical order.

Clear method: Response class

Syntax

```
clear()
```

Description

This method removes all cookies and headers as well as deletes any HTML that has been written to the Response object. After using this method, the Response object appears as it did when the script was first called.

CreateCookie method: Response class

Syntax

```
CreateCookie(name)
```

Description

This method adds a cookie to the response with the name specified by the string *name*. It returns a reference to the cookie object that is used to update the values of this cookie. If the cookie by the specified name already exists, a reference to the existing cookie is returned. This

method can be called multiple times to set more than one cookie. Cookie names may not contain the "\$" character.

! Important

Certain browsers have limit of either 20 or 50 cookies per web server domain depending on the browser security update that the user has applied. The browser randomly discards some cookies when that number is exceeded.

PeopleTools uses eight cookies. In addition, the number of cookies used by PeopleTools can grow depending on the number of sites that the user visits within the same domain. Some PeopleSoft applications use additional cookies. Therefore, you might or might not be able to create your own cookies to modify an existing PeopleSoft application. If you do create your own cookies, keep the use conservative. Otherwise, your application might end up causing the browser to discard critical sign-in or authentication cookies.

More information about browser limitations can be found online.

See "Troubleshooting Browser Limitations" on My Oracle Support.

GetCookie method: Response class

Syntax

```
GetCookie(name)
```

Description

This method returns the cookie object specified by the string *name*. If the cookie is not already present in this response, a null value is returned.

GetCookieNames method: Response class

Syntax

```
GetCookieNames()
```

Description

This method returns an array of strings that contains the names of all the cookies present in this response. If there are no cookies in the response, an empty array is returned.

GetHeader method: Response class

Syntax

```
GetHeader(name)
```

Description

This method returns the value of the response header requested by the string *name*. The match between *name* and the response header is case-insensitive. If the header requested does not exist, an empty string is returned.

GetHeaderNames method: Response class

Syntax

```
GetHeaderNames()
```

Description

This method returns an array of Strings representing the header names for this response.

GetImageURL method: Response class

Syntax

```
GetImageURL(IMAGE.ImageName | rowset.row.record)
```

Description

This method returns a string which represents the URL of the requested image for images stored in the database.

Because the image field is a long data type, you can have only one on a record. Therefore you need to specify the record only. The long field on the record is assumed to be the image.

Note

The GetImageURL method cannot be used with a derived work record.

Parameters

Parameter	Description
<i>ImageName</i>	Specify the name of an existing image. This name must be prefaced with the reserved word IMAGE.
<i>rowset.row.record</i>	Specify the path to the image, that is, the rowset, row, and record.

Example

The following example gets the URL to use for the image; and the second line uses the URL reference.

```
&image_URL = %Response.GetImageURL(Image.ARROW);  
  
%Response.WriteLine("");
```

The following gets an image from a record.

```
&image_URL =  
%Response.GetImageURL(&rs.GetRow(1).GetRecord(Record.EMPL_PHOTO));
```

GetJavaScriptURL method: Response class

Syntax

```
GetJavaScriptURL(HTML.HTMLname)
```

Description

This method returns a string which represents the URL of the requested HTML definition, for JavaScript HTML definitions stored in the database.

Example

This example assumes the existence in the database of an HTML definition called "HelloWorld_JS", that contains some JavaScript.

```
Function IScript_TestJavaScript()  
    %Response.WriteLine("<script src= " |  
    %Response.GetJavaScriptURL(HTML.HelloWorld_JS) | "></script>");  
  
End-Function;
```

In this example, the HTML definition is called FOO. The following PeopleCode example:

```
%Response.GetJavaScriptURL(HTML.FOO)
```

Resolves to something similar to:

```
http://myserver/cache/js/FOO_ENG_1.js
```

Related Topics

- Application Designer Developer's Guide: Understanding HTML Definitions

GetStyleSheetURL method: Response class

Syntax

```
GetStyleSheetURL(STYLESHEET.stylename)
```

Description

This method returns a URL string pointing to a style sheet created in Application Designer.

Example

In the following example, the first line gets the URL to use for the style sheet, and the second is the standard HTML to include the style sheet in the HTML document. The stylesheet link must be included in the HTML *before* any of the styles in the stylesheet are used. It should be included in the <head> section of the HTML document.

```
&strStyleSheet = %Response.GetStyleSheetURL(StyleSheet.BENEFITS_STYLE);  
  
%Response.WriteLine("<link rel=stylesheet href=" | &strStyleSheet | "  
type=""text=  
/css"">");
```

Now to use a style, assign the class attribute of your choice to your HTML tags, as follows:

```
%Response.WriteLine("<p class=PTTEXT>I am some classy text!!</p>");
```

RedirectURL method: Response class

Syntax

```
RedirectURL(URL)
```

Description

Use the RedirectURL function to navigate to the location specified by the *URL* parameter. The given location must be an absolute URL. No further output should be made by the PeopleCode program after calling this method.

Note

This function does not issue any kind of warning to the user about losing data. Your application should verify that all data is saved before launching a new page.

Note

If your URL string contains special characters (such as foreign characters) make sure you encode it first using the EncodeURL function, such as,
`%Response.RedirectURL(EncodeUrl(&Url))`.

In addition, while you can redirect relative URLs in certain circumstances, you *cannot* encode them.

Parameters

Parameter	Description
<i>URL</i>	Specify the location to navigate to as a string value.

Example

The following two examples demonstrate how to generate the URL string for component content:

```
/* Example 1 */
&url = GenerateComponentContentURL(%Portal, %Node, MenuName.GP_WC_FL_MNU,
"GBL", Component.GP_WC_PYRL_STG_FL, Page.GP_WC_PAYRL_STG_FL, "U");
%Response.RedirectURL(&url);

/* Example 2 */
&url = GenerateComponentPortalURL(%IntBroker.DefaultPortalName(),
%IntBroker.DefaultLocalNode(), MenuName.ROLE_MANAGER, %Market,
Component.EP_APPR_MAIN, Page.EP_APPR_MAIN1, "U", &SrcgRecord);
&url = &url | "&SOURCE=MAP";
%Response.RedirectURL(&url);
```

The following example demonstrates how to generate the URL string to redirect the user to an iScript:

```
/* Example 3 */
Local string &iScriptName = "IScript_AppHP";
If &renderType = "HTML" Then
    &iScriptName = "IScript_AppHtml";
End-If;

&url = GenerateScriptContentURL(%Portal, %Node, Record.WEBLIB_PTPP_SC,
Field.HOME PAGE, "FieldFormula", &iScriptName);
%Response.RedirectURL(EncodeURL(&MyScriptURL));
```

Related Topics

- PeopleCode Language Reference: EncodeURL function
- Fluid User Interface Developer's Guide: Transfer and Modal Functions

SetContentType method: Response class

Syntax

```
SetContentType(Type)
```

Description

This method sets the content type for this response. The parameter *type* takes a string value. This type may later be implicitly modified by the addition of properties such as the MIME charset property if the service finds it necessary and the appropriate property has not been set.

The content type defaults to "text/html" if it is not set.

Note

You can specify the content type as "text/html" to indicate that you do not want the input content to be modified or minified.

SetHeader method: Response class

Syntax

```
SetHeader(name, value)
```

Description

This method sets a response header with the specified name and value. Both parameters take string values. If the field has already been set with a value, this new value overwrites the previous one.

Example

The PortalRegisteredURL response header identifies to the portal the registered URL of the current content, so that it can find the correct content reference to look at for the template.

You can override the value of the PortalRegisteredURL response header in a PIA Script or PIA Page by adding the header to the response yourself, like this:

```
%Response.SetHeader("PortalRegisteredURL", &myURL);
```

You can do this to register the content with additional parameters.

UseSimpleURL method: Response class

Syntax

```
UseSimpleURL({True | False})
```

Description

The UseSimpleURL method sets the response header that informs the portal that the current content uses relative simple URLs, and does not have to be proxied.

By default, all PeopleSoft Pure Internet Architecture content sets the header to true. You must to call this method to specify that your content does not use the simple URL format, and therefore does need to be proxied.

Parameters

Parameter	Description
True False	Specify a Boolean value, either True or False, to indicate whether simple URLs are used.

Returns

None.

Write method: Response class

Syntax

```
Write(String)
```

Description

This method prints *String* to the HTTP output stream.

If you want the input content to be displayed as is, that is, you do not want the content to be minified, then you must set the *type* parameter to "text/html" in the SetContentType method.

You can use an HTML string from Application Designer HTML catalog with the Write method if you also use the GetHTMLText function, as follows:

```
%Response.Write(GetHTMLTEXT(HTML.MY_HTML));
```

You can also use an XML string. The following example takes a BiDocs structure that contains an XML response and puts that into a text string. After this is done, the %Response.Write function can send this as an XML response.

```
Local BiDocs &rootDoc;  
Local string &xmlString;  
&xmlString = %Response.GetContentBody();  
&rootDoc = GetBiDoc(&xmlString);  
/* do processing */  
&xmlString = &rootDoc.GenXMLString();  
%Response.Write(&xmlString);
```

Related Topics

- [SetContentType method: Response class](#)

WriteLine method: Response class

Syntax

```
WriteLine(String)
```

Description

This method adds a carriage control and line feed to the end of the string *String*, then prints the string to the HTTP output stream.

You can use an HTML string from Application Designer HTML catalog with the WriteLine method if you also use the GetHTMLText function, as follows:

```
%Response.WriteLine(GetHTMLTEXT(HTML.MY_HTML));
```

Response Class Properties

In this section, we discuss the Response class properties.

Charset property: Response class

Description

This property returns the character set used by the response object as a string.

This property is read-only.

DefaultStyleSheetName property: Response class

Description

This property returns the name of the default style sheet defined on the PeopleTools Options page. If not defined, PSSTYLEDEF is returned.

This property is read-only.

Related Topics

- System and Server Administration: Using Administration Utilities

Cookie Class

The cookie class encapsulates all information to be sent to the browser for a single cookie. The cookie class is used by the response object to set new cookies. The request object uses a simple name-value pair mechanism for retrieving previously stored cookie values sent with the HTTP request.

Cookie Class Properties

In this section, we discuss the Cookie class properties. The properties are discussed in alphabetical order.

Domain property: Cookie class

Description

This property returns the domain of this cookie, or null if not defined. This property is a string value.

This property is read/write.

Example

```
&cookie = &Response.AddCookie("My cookie", "My value");  
  
&cookie.Domain = ".example.com";
```

MaxAge property: Cookie class

Description

This property represents the maximum specified age of the cookie, as a signed number in seconds. The default value is -1. Setting the MaxAge property to a negative value ensures the cookie does not persist on the client when the client session ends. If the MaxAge property is set to zero, the cookie is deleted immediately from the client.

Value	Description
Non Negative Integer	Lifetime of the Cookie in seconds
0	Delete the cookie from the client immediately
-1	Default MaxAge property value (remove the cookie after the client exits)
Negative Integer	Remove the cookie after the client exits

This property is read/write.

Name property: Cookie class

Description

This property returns the name of the cookie as a string.

This property is read-only.

Path property: Cookie class

Description

This property returns the prefix of all the URL paths for which this cookie is valid, or an empty string if not defined.

This property is read/write.

Secure property: Cookie class

Description

This property specifies whether the cookie is to be secured. This property takes a Boolean value. The default value is False. Secure cookies are sent only if the client has established a secure link (such as HTTPS) with the server. This property is read/write.

Note

To override the default value of a cookie's secure attribute, use the Disable Secure option in the Browser Cookie Rules grid on the web profile configuration page.

See Portal Technology: Configuring Cookie Rules.

Value property: Cookie class

Description

This property returns the value of the cookie (as a string), or an empty string if it isn't defined.

This property is read/write.

Java Class

Understanding Java Class

Using the PeopleCode Java functions, you can access Java classes, or create instances of Java objects. Calling a Java program from PeopleCode can greatly extend your application. Also, the PeopleCode integration with Java enables you to pass parameters such as record, record fields, or rowsets into Java programs.

The PeopleCode Java functions are:

- `CopyToJavaArray`
- `CopyFromJavaArray`
- `CreateJavaArray`
- `CreateJavaObject`
- `GetJavaClass`

Supported Versions of Java

The supported platform database lists all supported versions of the Java Runtime Environment (JRE) for each version of PeopleTools on each supported operating system platform.

See My Oracle Support, "Platform Certifications."

Oracle also bundles a supported JRE version with PeopleTools for all supported operating system platforms except the z/OS platform. For z/OS, you will have to install a supported JRE. To determine which JRE is bundled with your version of PeopleTools, see the README file in the `PS_HOME\jre` directory.

Java Packages and Classes Delivered with PeopleTools

Java classes delivered with PeopleTools are located in the following directory:

`PS_HOME\class`

For PeopleSoft software, we typically use a standard package hierarchy:

`com.peoplesoft.prodline.prodcode`

In this hierarchy, *prodline* is the company standardized product line code (for example, hrms) and *prodcode* is the product code unique within the product line (for example, hr).

In addition, if there are any classes that are common across products, they are placed into the common package for that product line, that is:

```
com.peoplesoft.prodline.common
```

System Setup for Java Classes

If you access only the classes that come defined with PeopleTools, you don't need to do any additional setup.

If you want to access third-party Java classes or your own custom Java classes in the PeopleTools environment (that is, access these classes through PeopleCode), you must place the class files in specified locations or include the class files in JAR files in specified locations.

Note

Oracle recommends using the utility that comes with the Java SDK for creating JAR files.

When PeopleTools loads the Java Virtual Machine (JVM), PeopleTools builds a class path for the JVM from the following elements. The following numbering indicates the search order that the JVM would use for locating a specified Java class:

1. Class files in the *PS_CUST_HOME*\class directory.
2. Class files in JAR files in the *PS_CUST_HOME*\class directory.
3. Class files in the *PS_APP_HOME*\class directory.
4. Class files in JAR files in the *PS_APP_HOME*\class directory.
5. Class files in the *PS_APP_HOME*\appserv\classes directory.
6. Class files in JAR files in the *PS_APP_HOME*\appserv\classes directory.
7. Class files in the *PS_HOME*\class directory.
8. Class files in JAR files in the *PS_HOME*\class directory.
9. Class files in the *PS_CFG_HOME*\class directory.
10. Class files in JAR files in the *PS_CFG_HOME*\class directory.
11. For each directory listed in the "Add To CLASSPATH" parameter of the PSTOOLS configuration setting configuration file:
 - a. Class files in the specified directory.
 - b. Class files in JAR files in the specified directory.
12. For each directory listed in the PS_CLASSPATH environment variable:
 - a. Class files in the specified directory.
 - b. Class files in JAR files in the specified directory.

Note

For Application Engine programs, modify the “Add To CLASSPATH” parameter on the Process Scheduler machine.

For example, if PS_CLASSPATH is “dir1;dir2”, the search order for item 6 described previously would be:

1. Class files in dir1.
2. Class files in JAR files in dir1.
3. Class files in dir2.
4. Class files in JAR files in dir2.

Note

PeopleTools uses the -classpath option when it loads the JVM, which overrides the CLASSPATH environment variable. Therefore, do not use the CLASSPATH environment variable to identify third-party or custom Java classes that you want to access in the PeopleTools environment.

Note

PeopleTools does not guarantee the order in which JAR files within a directory will be added to the class path. If it is necessary to impose a search order on JAR files, then the JAR files must be in separate directories.

Like most environment variables, you can specify more than one entry in PS_CLASSPATH. On Windows, the PS_CLASSPATH entries are separated by semicolons. On Unix, they're separated by colons.

The following PS_CLASSPATH is for Windows:

```
c:\myjava;d:\myjava\com\mycompany\myproduct; . . .
```

The following PS_CLASSPATH would be for Unix:

```
/etc/myjava:/home/me/myjava/com/mycompany/myproduct: . . .
```

When developing your own classes you must be aware that most JVMs cache the class definitions. This means that even if you update the class files, a running JVM (inside an application server, for example) has already loaded and is referencing the old versions of the class files. The JVM won't pick up the new versions of the class files. You must restart the application server to make the JVM reload the updated classes.

See your system documentation for more information about setting an environment variable.

From PeopleCode to Java

This section provides an overview of Java state management concerns and present examples of instantiating Java objects.

State Management Concerns

The application server is *stateless*, which means that it doesn't keep any information (state) for its clients between calls to it. For one reason, calls to the application server can actually execute on different servers. When you are using Java in the application server, be careful to not leave state in the JVM that would cause your application to fail if a different application server (which would use a different invocation of the JVM) is used for subsequent calls. One method to leave state in the virtual machine is to use static (class) variables.

Similar considerations to these apply using Java in Application Engine programs, although here the difficulty arises when you try to checkpoint and then restart the program. The restart starts with a JVM invocation that doesn't have any of the state you might have stored into the JVM before the checkpoint.

Variables of the type `JavaObject` cannot have global or component scope because of this lack of ability to save the state of these objects.

An example of this is issuing messages. When you're running with PeopleSoft Pure Internet Architecture and issue a message, the message is produced by an end-user action, so the Application Server gathers up its state to return it to the browser. This state saving attempts to save the current PeopleCode execution state, causing it to issue an error because of the `JavaObject`.

The solution is to not have any non-null `JavaObject` objects when the message is issued.

The following is a simple Java program:

```
public class PC_Java_Test{

    public String pcTest(){

        String message;

        message = "PeopleCode is successfully executing Java.";

        return message;
    }
}
```

Here is the PeopleCode that calls this Java program. Note that the `JavaObject` is set to `NULL` before the message is issued.

```
&java_test = CreateJavaObject("PC_Java_Test");
&java_message = &java_test.pcTest();
&java_test = Null;
WinMessage(&java_message);
```

In `SavePreChange`, `Workflow`, or `SavePostChange` PeopleCode the situation is more complicated. Usually messages with a zero style parameter (no buttons other than OK and

perhaps Explain, therefore no result possible except OK) are queued up by the Application Server. They are output by the browser when the service completes, so the serialization won't happen until after the PeopleCode has finished, so you won't have to set your JavaObject to null. With other kinds of messages, you must do this.

CreateJavaObject Example

The following is an example program creating a Java object from a sample program that generates a random password.

```
/* Example to return Random Passwords from a Java class */
Local JavaObject &oGpw;

/* Create an instance of the object */
&oGpw = CreateJavaObject("com.PeopleSoft.Random.Gpw_Demo");

&Q = "1";

/* Call the method within the class */
&NEW_VALUE = &oGpw.getNewPassword(&Q, PSRNDMPSWD.LENGTH);

/* This is just returning one value for now */
PSRNDMPSWD.PSWD = &NEW_VALUE;
```

CreateJavaArray Example

Suppose we had a PeopleCode array of strings (&Parms) that we wanted to pass to a Java method xyz of class Abc. This example assumes that you don't know when you write the code just how many parameters you will have.

```
Local JavaObject &Abc, &RefArray;
Local array of String &Parms;

&Parms = CreateArray();

/* Populate array how ever you want to populate it */

&Abc = GetJavaObject("com.peoplesoft.def.Abc");

/* Create the java array object. */

&JavaParms = CreateJavaArray("java.lang.String[]", &Parms.Len);

/* Populate the java array from the PeopleCode array. */

&RefArray = GetJavaClass("java.lang.reflect.Array");

For &I = 1 to &Parms.Len
    &RefArray.set(&JavaParms, &I - 1, &Parms[&I]);
End-For;

/* Call the method. */
&Abc.xyz(&JavaParms);
```

GetJavaClass Example

The following example gets a system class.

```
&Sys = GetJavaClass("java.lang.System");
&Sys.setProperty("java.security.policy", "C:\java\policy");

WinMessage("The security property is: " |
&Sys.getProperty("java.security.policy"));

&Props = &Sys.getProperties();
&Props.put("java.security.policy", "C:\java\policy");
&Sys.setProperties(&Props);

WinMessage("The security property is: " |
&Sys.getProperty("java.security.policy"));
```

From Java to PeopleCode

The Java classes delivered with PeopleTools enable you to call PeopleCode from your Java program. Calling into PeopleCode works only from Java code that you have initially called from PeopleCode.

You must call PeopleCode facilities only from the same thread that was used for the call into Java. PeopleTools is not multithreaded.

You cannot call any PeopleCode facility that would cause the server to return to the browser for an end-user action, because the state of the Java computation cannot be saved and restored when the action is complete.

Related Topics

- [Considerations When Using the PeopleCode Java Functions](#)
Some PeopleCode built-in functions can't be called from a Java program. Many of these restrictions arise because you can't serialize Java objects. Inside Java, you can't serialize and save the state of the JVM.

SysVar Java Class

Use the SysVar Java Class to refer to System Variables, such as %Language or %DBType.

For example, %Session, becomes SysVar.Session()

Related Topics

- PeopleCode Language Reference: Understanding System Variables

SysCon Java Class

Use the SysCon Java Class to refer to system constants, such as %SQLStatus_OK or %FilePath_Absolute.

For example, %CharType_Matched becomes SysCon.CharType_Matched.

Func Java Class

Use the Func Java Class to refer to built-in functions, such as CreateRowset or GetFile.

For example, SetLanguage(LANG_CD) becomes Func.SetLanguage(LANG_CD)

Name Java Class

The Name Java Class enables you to use the PeopleSoft reserved item references. This enables you to reference pages, components, records, fieldnames, and so on.

For example, in PeopleCode you can refer to a record field using the following:

recname.fieldname

With the Name class, you can use a similar construct:

```
new PeopleSoft.PeopleCode.Name("RECNAME", "FIELDNAME");
```

Note that these must be in the exact case as the item. As all PeopleTools items are named in uppercase, that means you must use uppercase.

As another example, in PeopleCode you can refer to a page using the following:

PAGE.pagename

In Java, it would be:

```
new PeopleSoft.PeopleCode.Name("PAGE", "PAGENAME");
```

Accessing PeopleCode Objects

The existing PeopleCode classes (like Array, Rowset, and so on) have properties and methods you can access.

- PeopleCode classes have the same names, so Record becomes Record, SQL becomes SQL, and so on.
- Methods are accessed by the method name.
- The name of a property is prepended with either get or set, depending on whether you're reading or writing to the property.

For example, to get the IsChanged property would be getIsChanged. To set the value for a field would be &MyField.setValue.

Here is an example of a Java program that uses PeopleCode objects to access the database:

```
/*  
 * Class Test  
 *  
 * This code is used to test the Java/PeopleCode interface.  
 */
```

```

    */

import PeopleSoft.PeopleCode.*;

public class Test {

    /*
     * Test
     *
     * Add up and return the length of all the
     * item labels on the UTILITIES menu,
     * found two different ways.
     */

    public static int Test() {
        /* Get a Rowset to hold all the menu item records. */
        Rowset rs = Func.CreateRowset(new Name("RECORD", "PSMENUITEM"), new Object[]
        {});
        String menuName = "UTILITIES";
        int nRecs = rs.Fill(new Object[]{"WHERE FILL.MENUNAME = :1", menuName});

        int i;
        int nFillChars = 0;
        for (i = 1; i <= rs.getActiveRowCount(); i++) {
            String itemLabel = (String)rs.GetRow(i)
            .GetRecord(new Name("RECORD", "PSMENUITEM"))
            .GetField(new Name("FIELD", "ITEMLABEL"))
            .getValue();
            nFillChars += itemLabel.length();
        }

        /* Do this a different way - use the SQL object to read each menu
           item record. */

        int nSQLChars = 0;
        Record menuRec = Func.CreateRecord(new Name("RECORD", "PSMENUITEM"));
        SQL menuSQL = Func.CreateSQL("%SelectAll(:1) WHERE MENUNAME = :2",
        new Object[]{menuRec, menuName});

        while (menuSQL.Fetch(new Object[]{menuRec})) {
            String itemLabel = (String)menuRec
            .GetField(new Name("FIELD", "ITEMLABEL"))
            .getValue();
            nSQLChars += itemLabel.length();
        }

        return nFillChars + 100000 * nSQLChars;
    }
}

This can be run from PeopleCode like this:
Local JavaObject &Test;
Local number &chars;

&Test = GetJavaClass("Test");

```

```
&chars = &Test.Test();

&Test = Null;
WinMessage("The character counts found are: " | &chars, 0);
```

Using Application Classes From Java to PeopleCode

You call a Java program from an Application Class the same way you do using any other PeopleCode program, that is, by using one of the existing Java class built-in functions.

Calling an Application Class from a Java program has the following considerations:

- Application Classes must be accessed using the object built-in functions, such as `CreateObject`, `ObjectDoMethod`, `ObjectGetProperty`, and so on.
- You cannot declare a variable of type `HR.Package.SomeClass` in your Java program. The variable must be of type `Object`.
- There is no pre-pending the word 'get' or 'set' for properties. All classes, methods, and properties are passed as strings.

The following is an example of how to call an Application Class from a Java program.

This is the Java program:

```
package com.peoplesoft.pcode;
import PeopleSoft.PeopleCode.*;

public class foo {

    public foo() {
    }
    public String getString() {

        Object foo = Func.CreateObject("GTP:Foo", new Object[]{});
        return (String)Func.ObjectDoMethod((Peer)foo, "GetString", new Object[]
{}));
    }
}
```

The following is the Application Class Foo, in the Application Package Foo:

```
class Foo
    method GetString() Returns string;
end-class;

method GetString
    /* Returns String */
    Return "Hello";
end-method;
```

The following is the PeopleCode program that starts it all:

```
Local JavaObject &foo = CreateJavaObject("com.peoplesoft.pcode.foo");
GTP_PARSER.GTP_STR_RESULT = &foo.getString();
```

PeopleCode and Java Data Types Mapping

The following table describes the matching of types for resolution of overloaded Java methods and basic conversions. The first Java Type/Class is the one that is produced in the absence of any other type of information.

PeopleCode Type	Java Type/Class
Float	double, float
Number	double, float, byte, char, short, int, long
Integer	int, byte, char, short, long
Boolean	Boolean
String	java.lang.String
Date	java.sql.Date
Time	java.sql.Time
Date Time	java.util.Date
any kind of object	any kind of object

The following table represents the conversions done to produce the Java class `java.lang.Object`. In addition to these, the conversions (listed in the previous table) from String onwards are done to produce a `java.lang.Object`.

PeopleCode Type	Java Type/Class
Float, Number	java.lang.Double
Integer	java.lang.Integer
Boolean	java.lang.Boolean

The following table represents other conversions that are done as required by the signature of a Java method or constructor.

PeopleCode Type	Java Class
Integer, Number, Float	java.lang.Integer, java.lang.Byte, java.lang.Character, java.lang.Short, java.lang.Long, java.lang.Float, PeopleSoft.PeopleCode.intHolder, PeopleSoft.PeopleCode.doubleHolder
String	PeopleSoft.PeopleCode.StringHolder
PeopleCode built-in class Xxx	PeopleSoft.PeopleCode.Xxx
JavaObject	corresponding Java object

Considerations When Using the PeopleCode Java Functions

Some PeopleCode built-in functions can't be called from a Java program. Many of these restrictions arise because you can't serialize Java objects. Inside Java, you can't serialize and save the state of the JVM.

This means that you cannot call the following built-in functions:

- Think-time functions, such as DoCancel, Prompt, RevalidatePassword, and so on.
- Math functions, such as Abs, Cos, and Sin. Use the Java math functions instead.
- Java class functions, such as CreateJavaArray, CreateJavaObject, or GetJavaClass.
- Desupported functions, such as SetNextPanel, PanelGroupChanged, and so on. Use the new function instead, like SetNextPage, ComponentChanged, and so on.
- PeopleCode language elements, such as Exit, Return, If, and so on.
- Cursor position, such as SetCursorPos.
- Functions that rely on specific character encoding, such as char, code, exact, codeb, and so on.
- Menu appearance functions, such as CheckMenuItem, HideMenuItem, and so on.
- Transfer functions such as Transfer or TransferPage.
- DoSaveNow isn't allowed. However, DoSave is.

When you're creating your Java program, keep the following points in mind:

- If you're starting from an online application, avoid calling anything that will wait a long time.
- If you use third-party Java that require third-party platforms, you are limiting your program to just those platforms.

When setting a null date in Java, use the following:

```
myField.SetValue("");
```

Related Topics

- PeopleCode Developer's Guide: Think-Time Functions

Copying Arrays of Data Between PeopleCode and Java

When PeopleCode is called from your Java program it executes what are called native methods. These methods look like regular Java methods in their definition but are implemented in the PeopleTools layer. In order to go from Java into PeopleTools you have to use an interface called the Java Native Interface (JNI). There is a cost associated with each transition across the JNI. Using the CopyToJavaArray and the CopyFromJavaArray functions may improve your performance, as they act as a type of bulk data copy that minimizes the transition overhead.

For example you could copy an array by copying each element using the array's Get method. However, that would require traversing the JNI twice for each element; once going into Tools and once coming back from Tools. Not only is there transition overhead but there is also conversion between object types. For example a PeopleCode string has to be converted to a Java String and vice-versa. While these two builtins do not eliminate the latter conversions, they minimize the number of transitions across the JNI.

These functions can be used when you are selecting data into a PeopleCode array and you want to copy that data into a Java array.

These functions also allow you to supply an optional parameter that specifies the list of items you want copied.

Related Topics

- PeopleCode Language Reference: CopyFromJavaArray function

- PeopleCode Language Reference: CopyToJavaArray function

Considerations Working with the Java Garbage Collector

Memory is managed in the JRE by the Java garbage collector. Because PeopleTools has no control over when the Java garbage collector runs (apart from a user in their Java program calling it using `system.gc()`), PeopleTools interacts dynamically with the Java runtime garbage collector. In particular, PeopleCode objects created from a Java program (such as records, fields, and so on,) are in effect peer objects of real PeopleCode objects in PeopleTools. The release of these objects must be linked. Using the weak reference mechanism in Java, PeopleTools dynamically interacts with the Java garbage collector each time the execution thread passes through the JNI. This allows long-running Java applications in a PeopleTools context to function without having to wait for an "end of service" event for object cleanup.

There might be occasions where a Java application creates many application classes and wants to force the PeopleTools garbage collector to run. That can be achieved by calling the `CollectGarbage` function. This is not normally necessary.

Related Topics

- PeopleCode Language Reference: `CollectGarbage` function

Error Handling and the PeopleCode Java Functions

Java functions throw exceptions to indicate something unusual has happened. However, all exceptions from Java called by PeopleCode are turned into fatal errors. You can catch these exception by enclosing the call to Java in a Try-Catch PeopleCode block. If you do not try to catch these exception, the PeopleCode program is terminated, and the user transaction must be canceled.

PeopleSoft recommends that you write a Java wrapper to handle errors.

Use either the `All` or `None` built-in functions to check values that are returned if you think you may call a Java method that is defined to return a string, but returns a Null object reference instead. Java Null object references are automatically converted into PeopleCode Null object references.

Accessing the Application Log File

For doing additional error handling in your application, you can access the application log file using the PeopleCode `WriteToLog` built-in function. For example:

```
Func.WriteToLog(SysCon.ApplicationLogFence_Level1, myLogString);
```

See PeopleCode Language Reference: `WriteToLog` function.

The Java Debugging Environment

To use the JPDA debugging architecture, you must do the following. These instructions are general: how you actually set up the debugger depends on your system.

To use the Java Debugging Environment (JDB):

1. Download and install a copy of JPDA.
2. Set the path for your system.

Suppose you install JPDA in C:\jpdabin. Set your PATH environment variable to include C:\jpdabin.

3. Set the path for the application server.

For the application server, set the Domain Settings/Add to PATH to include C:\jpdabin.

4. Set the JavaVM Options.

Set the JavaVM Options to be something like the following (see the JPDA documentation for a more complete example):

```
-Xdebug -Djava.compiler=NONE -Xnoagent -  
Xrunjdpw:transport=dt_socket,suspend=&#x2192;  
n,address=8765,server=y
```

5. Run the debugger.

After starting the tools session and causing it to start the JVM, you can use the JDB command line debugger that comes with JPDA, using a command like the following:

```
jdb -connect com.sun.jdi.SocketAttach:port=8765
```

You can also use the (no cost) Forte for Java Community Edition IDE from Oracle or any of the Java IDEs noted on the JPDA pages.

Data Type of a Java Object

You should declare a Java object as type `JavaObject`. For example:

```
Local JavaObject &MyJavaClass;
```

Note

Java objects can be declared as type `Local` only.

Scope of a Java Object

A Java object can be instantiated from `PeopleCode` only. This object can be used anywhere you have `PeopleCode`, that is, in an application class, Component Interface `PeopleCode`, record field `PeopleCode`, and so on.

PeopleCode Java Built-in Functions

PeopleCode Language Reference: `CopyFromJavaArray` function

PeopleCode Language Reference: `CopyToJavaArray` function

PeopleCode Language Reference: `CreateJavaArray` function

PeopleCode Language Reference: `CreateJavaObject` function

PeopleCode Language Reference: `GetJavaClass` function

JSON Classes

Understanding JSON Classes

PeopleCode provides JSON classes that contain built-in functions and methods that enable you to populate data into and retrieve data from JavaScript object. However, you should already have knowledge of the JavaScript object notation in order to effectively write PeopleCode to work with a specific JSON.

JsonObject Class

This section provides an overview of the JsonObject class and discusses:

- JsonObject class methods.
- JsonObject class properties.

The JsonObject class provides the ability to create or access a Json object. A Json object by itself can hold nested Json object or field values.

JsonObject Class Methods

In this section, the JsonObject class methods are presented in alphabetical order.

AddJsonArray method: JsonObject class

Syntax

```
AddJsonArray(Name, JArrObj)
```

Description

Use this method to add a Json array to the Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array that needs to be added as a string.
<i>JArrObj</i>	Specifies the Json array object that needs to be added as a JsonArrayObject.

Returns

None.

Example

```
Local JsonObject &jobj = CreateJsonObject();  
Local JsonArray &jArr = CreateJsonArray();  
&jobj.AddJsonArray("MemberNames", &jArr);
```

AddJsonObject method: JsonObject class

Syntax

```
AddJsonObject(Name, JObj)
```

Description

Use this method to add a Json object to this Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object that needs to be added as a string.
<i>JObj</i>	Specifies the Json object that needs to be added as a JsonObject.

Returns

None.

Example

```
Local JsonObject &jobj = CreateJsonObject();  
Local JsonArray &jObj2 = CreateJsonArray();  
&jobj.AddJsonObject("Address", &jObj2);
```

AddProperty method: JsonObject class

Syntax

```
AddProperty(Name, Type)
```

Description

Use this method to add a property to the Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property that needs to be added as a string.

Parameter	Description
<i>Type</i>	Specifies the type of the property that needs to be added as a string.

Returns

None.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
&jObj.AddProperty("Id", "TYPE_INT");
```

GetAsString method: JsonObject class

Syntax

GetAsString (*Name*)

Description

Use this method to return the value of the input parameter object as a string.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the object as a string.

Returns

String.

Example

```
Local string &output = &jObj.GetAsString("Name");
```

GetBoolean method: JsonObject class

Syntax

GetBoolean(*Name*)

Description

Use this method to return the boolean value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Boolean object as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Married", "TYPE_BOOLEAN");
Local Boolean &jb = &jObj.GetBoolean("Married");
```

GetBooleanProperty method: JsonObject class

Syntax

GetBooleanProperty(*Name*)

Description

Use this method to return the Boolean property of the object as mentioned in the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Boolean property as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Married", "TYPE_BOOLEAN");
Local boolean &bBoolProp = &jObj.GetBooleanProperty("Married");
```

GetChildCount method: JsonObject class

Syntax

GetChildCount()

Description

Use this method to return the child count of the Json object.

Parameters

None.

Returns

Integer.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
&jObj.AddProperty("Id", "TYPE_INT");
Local integer &childcount = &jObj.GetChildCount();
```

GetDate method: JsonObject class

Syntax

`GetDate(Name)`

Description

Use this method to return the date value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the date object as a string.

Returns

Date.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("DOB", "TYPE_DATE");
Local date &jdt = &jObj.GetDate("DOB");
```

GetDateTime method: JsonObject class

Syntax

`GetDateTime(Name)`

Description

Use this method to return the datetime value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the datetime object as a string.

Returns

DateTime.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("DT_TM", "TYPE_DATETIME");
Local datetime &jdttm = &jObj.GetDateTime("DT_TM");
```

GetFloat method: JsonObject class

Syntax

GetFloat(*Name*)

Description

Use this method to return the float value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the float object as a string.

Returns

Float.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Expenses", "TYPE_FLOAT");
Local float &jf = &jObj.GetFloat("Expenses");
```

GetInteger method: JsonObject class

Syntax

GetInteger(*Name*)

Description

Use this method to return the integer value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the integer object as a string.

Returns

Integer.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Id", "TYPE_INT");
Local integer &ji = &jObj.GetInteger("Id");
```

GetJSONArray method: JsonObject class

Syntax

GetJSONArray(*Name*)

Description

Use this method to return the Json array mentioned by the input parameter from the Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array object as a string.

Returns

JsonArray.

Example

```
Local JsonObject &jObj = CreateJsonObject();
Local JsonArray &jArr = CreateJsonArray();
&jObj.AddJsonArray("MemberNames", &jArr);
Local JsonArray &ja = &jObj.GetJsonArray("MemberNames");
```

GetJsonNode method: JsonObject class

Syntax

```
GetJsonNode(Name)
```

Description

Use this method to return the Json node mentioned by the input parameter from the Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json node object as a string.

Returns

JsonNode.

Example

```
Local JsonObject &jObj = CreateJsonObject();  
&jObj.AddProperty("Name", "TYPE_STRING");  
Local JsonNode &jn = &jObj.GetJsonNode("Name");
```

GetJsonObject method: JsonObject class

Syntax

```
GetJsonObject(Name)
```

Description

Use this method to return the Json object mentioned by the input parameter from the Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object as a string.

Returns

JsonObject.

Example

```
Local JsonObject &jObj = CreateJsonObject();  
Local JsonObject &jObj2 = CreateJsonObject();
```

```
&jObj.AddJsonObject("Address", &jObj2);  
Local JsonObject &jo = &jObj.GetJsonObject("Address");
```

GetNumber method: JsonObject class

Syntax

```
GetNumber(Name)
```

Description

Use this method to return the number value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the number object as a string.

Returns

Number.

Example

```
Local JsonObject &jObj = CreateJsonObject();  
&jObj.AddProperty("Salary", "TYPE_NUMBER");  
Local Number &jn = &jObj.GetNumber("Salary");
```

GetPropertyNamesAt method: JsonObject class

Syntax

```
GetPropertyNamesAt(index)
```

Description

Use this method to return the name of the properties at the specified index in the Json object.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json object as an integer.

Returns

String.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
&jObj.AddProperty("Id", "TYPE_INT");
Local string &propName = &jObj.GetPropertyAt(1);
```

GetString method: JsonObject class

Syntax

GetString(*Name*)

Description

Use this method to return the string value of the property mentioned by the input parameter.

If the data type of the parameter is not a string, the method throws an exception. You may use a try-catch block to handle the exception.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the string object as a string.

Returns

String.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
Local String &js = &jObj.GetString("Name");
```

GetTime method: JsonObject class

Syntax

GetTime(*Name*)

Description

Use this method to return the time value of the property mentioned by the input parameter.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the time object as a string.

Returns

Time.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("TOB", "TYPE_TIME");
Local time &jtm = &jObj.GetTime("TOB");
```

IsExist method: JsonObject class

Syntax

IsExist(*Name*)

Description

Use this method to check whether the property exists.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object that needs to be checked as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
Local boolean &bExist = &jObj.IsExist("Id");
```

IsJsonArray method: JsonObject class

Syntax

IsJsonArray(*Name*)

Description

Use this method to check whether the property is a Json array.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property that needs to be checked as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
Local boolean &bIsJsonArr = &jObj.IsJsonArray("Name");
```

IsJsonObject method: JsonObject class

Syntax

IsJsonObject(*Name*)

Description

Use this method to check whether the property is a Json object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property that needs to be checked as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
Local boolean &bIsJsonObj = &jObj.IsJsonObject("Name");
```

IsNullProperty method: JsonObject class

Syntax

IsNullProperty(*Name*)

Description

Use this method to check whether the property is null or not.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object that needs to be checked as a string.

Returns

Boolean.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
&jObj.AddProperty("Id", "TYPE_INT");
Local boolean &bNull = &jObj.IsNullProperty("Id");
```

ToString method: JsonObject class

Syntax

```
ToString()
```

Description

Use this method to serialize the Json object to string.

Parameters

None.

Returns

String.

Example

```
Local JsonObject &jObj = CreateJsonObject();
&jObj.AddProperty("Name", "TYPE_STRING");
&jObj.AddProperty("Id", "TYPE_INT");
Local string &output = &jObj.ToString();
```

JsonObject Class Properties

In this section, the JsonObject class property is discussed.

ChildCount property: JsonObject class

Description

Use this property to return the child count of the Json object.

Example

```
Local integer &pchildcount = &jObj.ChildCount;
```

JsonValue Class

This section provides an overview of the JsonValue class and discusses:

- JsonValue class methods.
- JsonValue class properties.

The JsonValue class provides the ability to set, retrieve and check for different types of field values.

JsonValue Class Methods

In this section, the JsonValue class methods are presented in alphabetical order.

GetBoolean method: JsonValue class

Syntax

```
GetBoolean()
```

Description

Use this method to return a Boolean value of the object.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetBoolean( True);  
Local Boolean &jValBool = &jVal.GetBoolean();
```

GetDate method: JsonValue class

Syntax

```
GetDate()
```

Description

Use this method to return date value of the object.

Parameters

None.

Returns

Date.

Example

```
Local date &dt = Date(20000101);  
&jVal.SetDate(&dt);  
Local date &jValDt = &jVal.GetDate();
```

GetDateTime method: JsonValue class

Syntax

```
GetDateTime()
```

Description

Use this method to return datetime value of the object.

Parameters

None.

Returns

DateTime.

Example

```
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);  
&jVal.SetDateTime(&dtm);  
Local datetime &jValDtM = &jVal.GetDateTime();
```

GetInteger method: JsonValue class

Syntax

```
GetInteger()
```

Description

Use this method to return integer value of the object.

Parameters

None.

Returns

Integer.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetInteger(5);  
Local integer &jValInt = &jVal.GetInteger();
```

GetNumber method: JsonValue class

Syntax

```
GetNumber()
```

Description

Use this method to return number value of the object.

Parameters

None.

Returns

Number.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetNumber(5);  
Local Number &jValNum = &jVal.GetNumber();
```

GetString method: JsonValue class

Syntax

```
GetString()
```

Description

Use this method to return string value of the object.

Parameters

None.

Returns

String.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetString("Test String");  
Local string &jValStr = &jVal.GetString();
```

GetTime method: JsonValue class

Syntax

```
GetTime()
```

Description

Use this method to return time value of the object.

Parameters

None.

Returns

Time.

Example

```
Local time &tm = Time(10507);  
&jVal.SetTime(&tm);  
Local time &jValTime = &jVal.GetTime();
```

GetValue method: JsonValue class

Syntax

```
GetValue()
```

Description

Use this method to return the value of the object.

Parameters

None.

Returns

Any.

Example

```
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);  
&jVal.SetDateTime(&dtm);  
Local any &jValAny = &jVal.GetValue();
```

IsNull method: JsonValue class

Syntax

```
IsNull()
```

Description

Use this method to check whether the value of the object is null.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
Local boolean &bIsNull = &jVal.IsNull();
```

SetBoolean method: JsonValue class

Syntax

```
SetBoolean(Value)
```

Description

Use this method to set the Boolean value of the object.

Parameters

Parameter	Description
<i>Value</i>	Specifies a Boolean value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetBoolean(True);
```

SetDate method: JsonValue class

Syntax

```
SetDate(Date)
```

Description

Use this method to set the date value of the object.

Parameters

Parameter	Description
<i>Date</i>	Specifies a date value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
Local date &dt = Date(20000101);  
&jVal.SetDate(&dt);
```

SetDateTime method: JsonValue class

Syntax

```
SetDateTime(Date_time)
```

Description

Use this method to set the datetime value of the object.

Parameters

Parameter	Description
<i>Date_time</i>	Specifies a datetime value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);  
&jVal.SetDateTime(&dtm);
```

SetFalse method: JsonValue class

Syntax

```
SetFalse()
```

Description

Use this method to set the value of the object to false.

Parameters

None.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetFalse();
```

SetInteger method: JsonValue class

Syntax

```
SetInteger(Value)
```

Description

Use this method to set the integer value of the object.

Parameters

Parameter	Description
<i>Value</i>	Specifies an integer value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();
&jVal.SetInteger(5);
```

SetNull method: JsonValue class

Syntax

```
SetNull()
```

Description

Use this method to set the value of the object to null.

Parameters

None.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();
&jVal.SetNull();
```

SetNumber method: JsonValue class

Syntax

```
SetNumber(Value)
```

Description

Use this method to set the number value of the object.

Parameters

Parameter	Description
<i>Value</i>	Specifies a number value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetNumber(5);
```

SetString method: JsonValue class

Syntax

```
SetString(Value)
```

Description

Use this method to set the string value of the object.

Parameters

Parameter	Description
<i>Value</i>	Specifies a string value.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();  
&jVal.SetString("Test String");
```

SetTrue method: JsonValue class

Syntax

```
SetTrue()
```

Description

Use this method to set the value of the object to true.

Parameters

None.

Returns

None.

Example

```
Local JsonValue &jVal = CreateJsonValue();
&jVal.SetTrue();
```

ToString method: JsonValue class

Syntax

```
ToString()
```

Description

Use this method to serialize the Json value object to a string.

Parameters

None.

Returns

String.

Example

```
Local JsonValue &jVal = CreateJsonValue();
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);
&jVal.SetDateTime(&dtm);
Local string &jValToString = &jVal.ToString();
```

JsonValue Class Properties

In this section, the JsonValue class property is discussed.

ValueType property: JsonValue class

Description

Use this property to return the type of the value.

Example

```
Local JsonValue &jVal = CreateJsonValue();
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);
```

```
&jVal.SetDateTime(&dtm);  
Local integer &jValueType = &jVal.ValueType;
```

JsonArray Class

This section provides an overview of the JsonArray class and discusses:

- JsonArray class methods.
- JsonArray class properties.

The JsonArray class provides the ability to add or retrieve field values in the form of an array.

JsonArray Class Methods

In this section, the JsonArray class methods are presented in alphabetical order.

AddElement method: JsonArray class

Syntax

```
AddElement(Element)
```

Description

Use this method to add an element of any type to the Json array.

Parameters

Parameter	Description
<i>Element</i>	Specifies the element that needs to be added as any type.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
&jArray.AddElement("Name");
```

AddJsonArrayElement method: JsonArray class

Syntax

```
AddJsonArrayElement(Name, Array)
```

Description

Use this method to add a Json array to the Json array.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array as a string.
<i>Array</i>	Specifies the array as a JsonArray.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local JsonArray &jArr1 = CreateJsonArray();  
&jArray.AddJsonArrayElement("Member Names", &jArr1);
```

AddJsonObjectElement method: JsonArray class

Syntax

```
AddJsonObjectElement(Name, Obj)
```

Description

Use this method to add a Json object to the Json array.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object as a string.
<i>Obj</i>	Specifies the object as a JsonObject.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local JsonObject &jArrObj = CreateJsonObject();  
&jArrObj.AddProperty("Name1", "TYPE_STRING");  
&jArrObj.AddProperty("Name2", "TYPE_STRING");  
&jArray.AddJsonObjectElement("Member Names", &jArrObj);
```

AddNullElement method: JsonArray class

Syntax

```
AddNullElement()
```

Description

Use this method to add a null element to the Json array.

Parameters

None.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
&jArray.AddNullElement();
```

GetAsString method: JsonArray class

Syntax

```
GetAsString(Index)
```

Description

Use this method to return the Json array element at the index location as a string.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

String.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local string &myJeStr = &jArray.GetAsString(2);
```

GetBoolean method: JsonArray class

Syntax

```
GetBoolean(Index)
```

Description

Use this method to return the Boolean value at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Boolean.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local Boolean &myBool = &jArray.GetBoolean(2);
```

GetDate method: JsonArray class

Syntax

GetDate(*Index*)

Description

Use this method to return the date at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Date.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local Date &myDt = &jArray.GetDate(2);
```

GetDateTime method: JsonArray class

Syntax

GetDateTime(*Index*)

Description

Use this method to return the date time at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

DateTime.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local DateTime &myDt = &jArray.GetDateTime(2);
```

GetFloat method: JsonArray class

Syntax

GetFloat(*Index*)

Description

Use this method to return the float value at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Float.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local float &myFloat = &jArray.GetFloat(2);
```

GetInteger method: JsonArray class

Syntax

GetInteger(*Index*)

Description

Use this method to return the integer value at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Integer.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local integer &myInt = &jArray.GetInteger(2);
```

GetJsonArray method: JsonArray class

Syntax

```
GetJsonArray(Index)
```

Description

Use this method to return the Json array at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

JsonArray.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local JsonArray &myJsonArr = &jArray.GetJsonArray(2);
```

GetJsonNode method: JsonArray class

Syntax

```
GetJsonNode(Index)
```

Description

Use this method to return the Json node at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

JsonNode.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local JsonNode &myJsonNd = &jArray.GetJsonNode(2);
```

GetJsonObject method: JsonArray class

Syntax

```
GetJsonObject(Index)
```

Description

Use this method to return the Json object at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

JsonObject.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local JsonObject &myJsonObj = &jArray.GetJsonObject(2);
```

GetNumber method: JsonArray class

Syntax

```
GetNumber(Index)
```

Description

Use this method to return the number value at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Number.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local number &myNum = &jArray.GetNumber(2);
```

GetString method: JsonArray class

Syntax

GetString(*Index*)

Description

Use this method to return the string value at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

String.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local string &myStr = &jArray.GetString(2);
```

GetTime method: JsonArray class

Syntax

GetTime(*Index*)

Description

Use this method to return the time at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Time.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local Time &myTm = &jArray.GetTime(2);
```

GetType method: JsonArray class

Syntax

GetType(*Index*)

Description

Use this method to return the Json value type at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Integer.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local integer &myJvTyp = &jArray.GetType(2);
```

IsNull method: JsonArray class

Syntax

IsNull(*Index*)

Description

Use this method to check whether the Json array element at the index location is null.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index in the Json array as an integer.

Returns

Boolean.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local Boolean &bIsNull = &jArray.IsNull(2);
```

Length method: JsonArray class

Syntax

Length()

Description

Use this method to return the length of the Json array.

Parameters

None.

Returns

Integer.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local integer &myJaLen = &jArray.Length();
```

Pop method: JsonArray class

Syntax

Pop()

Description

Use this method to remove the last element in the Json array.

Parameters

None.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
&jArray.Pop();
```

Remove method: JsonArray class

Syntax

`Remove(Index)`

Description

Use this method to remove the element at the index location.

Parameters

Parameter	Description
<i>Index</i>	Specifies the index as an integer.

Returns

None.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
&jArray.Remove(3);
```

ToString method: JsonArray class

Syntax

`ToString()`

Description

Use this method to serialize the Json array to a string.

Parameters

None.

Returns

String.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local string &myJaStr = &jArray.ToString();
```

JsonArray Class Properties

In this section, the JsonArray class property is discussed.

Size property: JsonArray class

Description

Use this property to return the size of the Json array.

Example

```
Local JsonArray &jArray = CreateJsonArray();  
Local integer &jArrSz = &jArray.Size;
```

JsonNode Class

This section provides an overview of the JsonNode class and discusses:

- JsonNode class methods.
- JsonNode class properties.

The JsonNode class provides the ability to identify a field or a Json object from the Json builder object.

JsonNode Class Methods

In this section, the JsonNode class methods are presented in alphabetical order.

GetBoolean property: JsonNode class

Syntax

```
GetBoolean()
```

Description

Use this method to return a Boolean value from the node.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Boolean &myBoolean = &jNode.GetBoolean();
```

GetFloat property: JsonNode class

Syntax

```
GetFloat()
```

Description

Use this method to return the float value from the node.

Parameters

None.

Returns

Float.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local float &myFloat = &jNode.GetFloat();
```

GetInteger property: JsonNode class

Syntax

```
GetInteger()
```

Description

Use this method to return the integer value from the node.

Parameters

None.

Returns

Integer.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local integer &myInt = &jNode.GetInteger();
```

GetJSONArray property: JsonNode class

Syntax

```
GetJSONArray()
```

Description

Use this method to return the Json array from the node.

Parameters

None.

Returns

JSONArray.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JSONArray &jArray = &jNode.GetJSONArray();
```

GetJsonObject property: JsonNode class

Syntax

```
GetJsonObject()
```

Description

Use this method to return the Json object from the node.

Parameters

None.

Returns

JsonObject.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonObject &jObj = &jNode.GetJsonObject();
```

GetJsonValue property: JsonNode class

Syntax

```
GetJsonValue()
```


Description

Use this method to return the Json value from the node.

Parameters

None.

Returns

JsonValue.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonValue &jValue = &jNode.GetJsonValue();
```

GetNodeType property: JsonNode class

Syntax

```
GetNodeType()
```

Description

Use this method to return the type of the node.

Parameters

None.

Returns

Integer.

List of numeric values and the corresponding node types:

Numeric Value	Node Types
0	JSON_NODE_NULL
1	JSON_NODE_OBJECT
2	JSON_NODE_ARRAY
3	JSON_NODE_VALUE

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local integer &nodeType = &jNode.GetNodeType();
```

GetNumber property: JsonNode class

Syntax

```
GetNumber()
```

Description

Use this method to return the number value from the node.

Parameters

None.

Returns

Number.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Number &myNumber = &jNode.GetNumber();
```

GetParentNode property: JsonNode class

Syntax

```
GetParentNode()
```

Description

Use this method to return the parent node of the current node.

Parameters

None.

Returns

JsonNode.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonNode &parentNode = &jNode.GetParentNode();
```

GetString property: JsonNode class

Syntax

```
GetString()
```

Description

Use this method to return the string value from the node.

Parameters

None.

Returns

String.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local String &myString = &jNode.GetString();
```

GetValueType property: JsonNode class

Syntax

GetValueType()

Description

Use this method to return the type of the value.

Parameters

None.

Returns

Integer.

List of numeric values and the corresponding value types.

Numeric Value	Value Types
0	JSON_VALUE_INVALID
1	JSON_VALUE_INT
2	JSON_VALUE_FLOAT
3	JSON_VALUE_DOUBLE
4	JSON_VALUE_NUMBER
5	JSON_VALUE_BOOLEAN
6	JSON_VALUE_STRING
7	JSON_VALUE_NULL
8	JSON_VALUE_DATE
9	JSON_VALUE_TIME
10	JSON_VALUE_DATETIME

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local integer &nodeValue = &jNode.GetValueType();
```

IsJsonArray property: JsonNode class

Syntax

```
IsJsonArray()
```

Description

Use this method to check whether the type of the node is a JsonArray.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Boolean &bIsJsonArr = &jNode.IsJsonArray();
```

IsJsonObject property: JsonNode class

Syntax

```
IsJsonObject()
```

Description

Use this method to check whether the type of the node is a JsonObject.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Boolean &bIsJsonObj = &jNode.IsJsonObject();
```

IsJsonValue property: JsonNode class

Syntax

```
IsJsonValue()
```

Description

Use this method to check whether the type of the node is a JsonValue.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Boolean &bIsJsonVal = &jNode.IsJsonValue();
```

IsNull property: JsonNode class

Syntax

```
IsNull()
```

Description

Use this method to check whether the value of the node is null.

Parameters

None.

Returns

Boolean.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local Boolean &bIsNull = &jNode.IsNull();
```

SetBoolean property: JsonNode class

Syntax

```
SetBoolean(boolean_value)
```

Description

Use this method to set the Boolean value of the node.

Parameters

Parameter	Description
<i>boolean_value</i>	Specifies the value of the node as a Boolean.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetBoolean(True);
```

SetDate property: JsonNode class

Syntax

```
SetDate(date_value)
```

Description

Use this method to set the date value of the node.

Parameters

Parameter	Description
<i>date_value</i>	Specifies the date value of the node as date.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local date &dt = Date(20000101);  
&jNode.SetDate(&dt);
```

SetDateTime property: JsonNode class

Syntax

```
SetDateTime(datetime_value)
```

Description

Use this method to set the datetime value of the node.

Parameters

Parameter	Description
<i>datetime_value</i>	Specifies the datetime value of the node as datetime.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();
Local datetime &dtm = DateTime6(2000, 1, 1, 1, 5, 7);
&jNode.SetDateTime(&dtm);
```

SetFalse property: JsonNode class

Syntax

```
SetFalse()
```

Description

Use this method to set the value of the node to false.

Parameters

None.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();
&jNode.SetFalse();
```

SetFloat property: JsonNode class

Syntax

```
SetFloat(float_value)
```

Description

Use this method to set the float value of the node.

Parameters

Parameter	Description
<i>float_value</i>	Specifies the float value of the node as a float.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetFloat(1.2);
```

SetInteger property: JsonNode class

Syntax

```
SetInteger(integer_value)
```

Description

Use this method to set the integer value of the node.

Parameters

Parameter	Description
<i>integer_value</i>	Specifies the integer value of the node as an integer.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetInteger(10);
```

SetJsonArray property: JsonNode class

Syntax

```
SetJsonArray(jArray)
```

Description

Use this method to set the Json array of the node.

Parameters

Parameter	Description
<i>jArray</i>	Specifies the Json array of the node as a JsonArray object.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonArray &jArr = CreateJsonArray();  
&jNode.SetJsonArray(&jArr);
```

SetJsonObject property: JsonNode class

Syntax

```
SetJsonObject(Object)
```

Description

Use this method to set the Json object of the node.

Parameters

Parameter	Description
<i>Object</i>	Specifies the object as a JsonObject.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonObject &jObj = CreateJsonObject();  
&jNode.SetJsonObject(&jObj);
```

SetJsonValue property: JsonNode class

Syntax

```
SetJsonValue(jValue)
```

Description

Use this method to set the Json value of the node.

Parameters

Parameter	Description
<i>jValue</i>	Specifies the JsonValue of the node as a JsonValue object.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local JsonValue &jVal = CreateJsonValue();  
&jNode.SetJsonValue(&jVal);
```

SetNodeName property: JsonNode class

Syntax

SetNodeName(*Name*)

Description

Use this method to set the name of the node.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the node as a string.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetNodeName("Test Node");
```

SetNull property: JsonNode class

Syntax

SetNull()

Description

Use this method to set the value of the node to null.

Parameters

None.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetNull();
```

SetNumber property: JsonNode class

Syntax

```
SetNumber(number_value)
```

Description

Use this method to set the number value of the node.

Parameters

Parameter	Description
<i>number_value</i>	Specifies the number value of the node as a number.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetNumber(5);
```

SetString property: JsonNode class

Syntax

```
SetString(string_value)
```

Description

Use this method to set the string value of the node.

Parameters

Parameter	Description
<i>string_value</i>	Specifies the string value of the node as a string.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetString("Test String");
```

SetTime property: JsonNode class

Syntax

```
SetTime(time_value)
```

Description

Use this method to set the time value of the node.

Parameters

Parameter	Description
<i>time_value</i>	Specifies the time value of the node as time.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local time &tm = Time(10507);  
&jNode.SetTime(&tm);
```

SetTrue property: JsonNode class

Syntax

```
SetTrue()
```

Description

Use this method to set the value of the node to true.

Parameters

None.

Returns

None.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
&jNode.SetTrue();
```

ToString property: JsonNode class

Syntax

```
ToString()
```

Description

Use this method to serialize the JsonNode object to string.

Parameters

None.

Returns

String.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local String &myJNodeStr = &jNode.ToString();
```

JsonNode Class Properties

In this section, the JsonNode class properties are presented in alphabetical order

NodeType property: JsonNode class

Description

Use this property to return the type of the JsonNode object.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local integer &nodetype = &jNode.NodeType;
```

ValueType property: JsonNode class

Description

Use this property to return the type of the JsonNode value.

Example

```
Local JsonNode &jNode = CreateJsonNode();  
Local integer &valuetype = &jNode.ValueType;
```

JsonBuilder Class

This section provides an overview of the JsonBuilder class and discusses:

- JsonBuilder class methods.
- JsonBuilder class properties.

The JsonBuilder class provides the starting point to build an unstructured Json using its methods & properties. The outcome of the builder can be directly converted to a Json string.

JsonBuilder Class Methods

In this section, the JsonBuilder class methods are presented in alphabetical order.

AddElement method: JsonBuilder class

Syntax

```
AddElement(Element)
```

Description

Use this method to add an element.

Parameters

Parameter	Description
<i>Element</i>	Specifies the element that needs to be added as any type.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
If &jBldr.StartArrayReturnsTrue("properties") Then  
    &jBldr.AddElement("content");
```

```
        &jBldr.EndArray("properties");  
End-If;
```

AddNullElement method: JsonBuilder class

Syntax

```
AddNullElement()
```

Description

Use this method to add a null element at the end of an array.

Parameters

None.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
If &jBldr.StartArrayReturnsTrue("properties") Then  
    &jBldr.AddNullElement();  
    &jBldr.EndArray("properties");  
End-If;
```

AddNullProperty method: JsonBuilder class

Syntax

```
AddNullProperty(Name)
```

Description

Use this method to add the property with null as its value.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property as a string.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
&jBldr.AddNullProperty("Item_None");
```

AddProperty method: JsonBuilder class

Syntax

AddProperty(*Name*, *Type*)

Description

Use this method to add a property.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the property as a string.
<i>Type</i>	Specifies the type of the property as any.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();
&jBldr.AddProperty("store", "false");
&jbldr.AddProperty("description", "orcl_attachment_pipe");
&jbldr.AddProperty("ignore_above", "254");
&jbldr.AddProperty("tokenizer", "whitespace");
```

EndArray method: JsonBuilder class

Syntax

EndArray(*Name*)

Description

Use this method to end the Json array with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array as a string.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();
&jBldr.EndArray("filter");
```

EndObject method: JsonBuilder class

Syntax

```
EndObject(Name)
```

Description

Use this method to end the Json object with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object as a string.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();
&jBldr.EndObject("filter");
```

GetBuildMode method: JsonBuilder class

Syntax

```
GetBuildMode()
```

Description

Use this method to get the build mode such as array, object, and so on.

Parameters

None.

Returns

Integer.

List of numeric values and their corresponding build modes.

Numeric Value	Build Modes
0	JSON_BUILD_MODE_NONE

Numeric Value	Build Modes
1	JSON_BUILD_MODE_OBJECT
2	JSON_BUILD_MODE_ARRAY
3	JSON_BUILD_MODE_MEMBER

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local integer &iBldMode = &jBldr.GetBuildMode();
```

GetRootNode method: JsonBuilder class

Syntax

```
GetRootNode()
```

Description

Use this method to get the root node.

Parameters

None.

Returns

JsonNode.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local JsonNode &jNode = &jBldr.GetRootNode();
```

StartArray method: JsonBuilder class

Syntax

```
StartArray(Name)
```

Description

Use this method to start building the Json array with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array as a string.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
&jBldr.StartArray("");
```

StartArrayReturnsTrue method: JsonBuilder class

Syntax

```
StartArrayReturnsTrue(Name)
```

Description

Use this method to start building the Json array with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json array as a string.

Returns

Boolean.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local Boolean &bStArr = &jBldr.StartArrayReturnsTrue("articles");
```

StartObject method: JsonBuilder class

Syntax

```
StartObject(Name)
```

Description

Use this method to start building the Json object with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object as a string.

Returns

None.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
&jBldr.StartObject("");
```

StartObjectReturnsTrue method: JsonBuilder class

Syntax

```
StartObjectReturnsTrue(Name)
```

Description

Use this method to start building the Json object with a name that is optional.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the Json object as a string.

Returns

Boolean.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local Boolean &bStObj = &jBldr.StartObjectReturnsTrue("index");
```

ToString method: JsonBuilder class

Syntax

```
ToString()
```

Description

Use this method to serialize the Json builder object to a string.

Parameters

None.

Returns

String.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local String &jBldrStr = &jBldr.ToString();
```

JsonBuilder Class Properties

In this section, the JsonBuilder class property is discussed.

BuildMode property: JsonBuilder class

Description

Use this property to return the build mode.

Example

```
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local integer &iBldMode = &jBldr.BuildMode;
```

JsonParser Class

This section provides an overview of the JsonParser class and discusses JsonParser class methods.

The JsonParser class is used for parsing Json string to access and drill down to objects and field values.

JsonParser Class Methods

In this section, the JsonParser class methods are presented in alphabetical order.

GetRootObject method: JsonParser class

Syntax

```
GetRootObject()
```

Description

Use this method to return the root object.

Parameters

None.

Returns

JsonObject.

Example

```
Local JsonParser &jParser = CreateJsonParser();  
Local JsonObject &jRootObj = &jParser.GetRootObject();
```

Parse method: JsonParser class

Syntax

```
Parse(json_string)
```

Description

Use this method to parse the Json for details.

Parameters

Parameter	Description
<i>json_string</i>	Specifies Json as a string.

Returns

Boolean.

Example

```
Local JsonParser &jParser = CreateJsonParser();  
Local JsonBuilder &jBldr = CreateJsonBuilder();  
Local Boolean &bParseStatus = &jParser.Parse(&jBldr.ToString());
```

ToString method: JsonParser class

Syntax

```
ToString()
```

Description

Use this method to serialize the JsonParser object to string.

Parameters

None.

Returns

String.

Example

```
Local JsonParser &jParser = CreateJsonParser();  
Local String &jParserStr = &jParser.ToString();
```

Mail Classes

Understanding PeopleSoft MultiChannel Framework Mail Classes

This section provides an overview of the PeopleSoft MultiChannel Framework Mail Classes and discusses their scope and data types.

PeopleSoft MultiChannel Framework Mail Classes

The PT_MCF_MAIL application package contains the following classes:

- MCFBodyPart
- MCFEmail
- MCFGetMail
- MCFHeaders
- MCFInboundEmail
- MCFMailStore
- MCFMultiPart
- MCFMailUtil
- MCFOutboundEmail
- MCFPart
- SMTPSession

Use the mail classes to develop applications to create and send emails, fetch and delete emails on the mail server, manage emails in your PeopleSoft database, and access attachments . By using the mail classes, you are not required to know the details of the GETMAILTARGET connector or the database schema.

Scope of the Mail Classes

The mail classes can be instantiated only from PeopleCode.

The mail classes can be called from a component, an internet script, or a Application Engine program.

Mail classes can be of local, global, or component scope.

Data Types of the Mail Classes

Every mail class is its own data type; that is, get mail objects are declared as data type MCFGetMail, store mail objects are declared as type MCFMailStore, and so on.

The following are the data types of the mail classes:

- MCFBodyPart
- MCFEmail
- MCFGetMail
- MCFHeaders
- MCFInboundEmail
- MCFMailStore
- MCFMailUtil
- MCFMultiPart
- MCFOutboundEmail
- MCFPart
- SMTPSession

Importing Mail Classes

The mail classes are *not* built-in classes, like Rowset, Field, Record, and so on. They are application classes. Before you can use these classes in your PeopleCode program, you must import them to your program.

An import statement names either all the classes in a package or a particular application class.

The application package PT_MCF_MAIL contains the following classes:

- MCFBodyPart
- MCFEmail
- MCFGetMail
- MCFHeaders
- MCFInboundEmail
- MCFMailStore
- MCFMailUtil
- MCFMultiPart
- MCFOutboundEmail
- MCFPart
- SMTPSession

To import all the mail classes, use the following import statement:

```
import PT_MCF_MAIL: *;
```

Using an asterisk after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are *not* made available. The PT_MCF_MAIL application package contains no subpackages.

Related Topics

- [Understanding Application Classes](#)

You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

Creating a Mail Object

After you've imported the mail classes, you instantiate an object of one of those classes using the constructor for the class and the Create function.

The following example creates a new instance of the MCFGetMail class, as the variable &gm, with local scope:

```
Local MCFGetMail &gm = create MCFGetMail();
```

Using the Mail Classes

This section provides overview of the life cycle of an outbound email and discusses how to use the mail classes.

Life Cycle of an Outbound Email

The following are the general steps used to create an outbound email:

1. Create an MCFOutboundEmail object
2. Set the usual properties for an email, such as the From, Subject, Recipients, and Text properties.
3. If necessary, set the parts of the email using MCFMultipart and MCFBodyPart classes.
4. Use the Send method to send the email.

The MCFPart and MCFEmail classes provide the common functionality for the MCFBodyPart and MCFOutboundEmail (and MCFInboundEmail) classes, respectively. In general, you never need to use the MCFPart or MCFEmail classes directly in your PeopleCode programs. However, in rare cases you may use these classes if you want to extend the application package.

The SMTPSession class encapsulates all the session parameters that can be set in a Simple Mail Transfer Protocol (SMTP) session. Each MCFOutboundEmail object points to one SMTPSession object. In most cases, the parameters for the SMTP session are set from values found in the application server configuration file (psappsrv.cfg). However, you can also set these parameters by creating an SMTPSession object, setting the desired parameters, then creating an MCFOutboundEmail object.

For convenience, all SMTP attributes are also directly accessible from the MCFOutboundEmail class, so you don't need to create an SMTPSession object when you're sending just one email.

When you want to send many emails in a single SMTP session, you don't have to set the SMTP session parameter in each and every email. For this case, you can create a single SMTPSession, using either the default settings or explicitly setting the desired parameters, then use the CreateOutboundEmail method of SMTPSession object to create all the MCFOutboundEmail objects. This way all the MCFOutboundEmail objects use the same

SMTP session parameters. After specifying the value of all the parameters for all the MCFOutboundEmail objects, use the SendAll method of SMTPSession object to send all the emails in one SMTP session.

All the application classes mentioned above hold all the data until one of the Send methods is called. The Send methods connect to the mail server using a JavaMail API that sends the mail.

Since all communication to the mail server happens when a Send method is called, errors are only reported when the Send method returns. The return value indicates the success or the failure of the send process. In case of failure, you can query the MCFOutboundEmail application class for the details of the error. The error details are available in properties such as MessageSetNumber, MessageNumber, ErrorDescription, ErrorDetails, and so on.

Delivery Status Notification and Return Receipts

There is an SMTP extension that supports Delivery Status Notifications (DSN) defined in RFC 1891. This may or may not be supported by the user's Mail Transport Agent (MTA). The acknowledgements do not indicate whether the user reads the message, they only acknowledge receipt of the message by their mail server. It is possible that the mail server throws the message away as spam and the end user never actually receives the email. To get such notifications, set the StatusNotifyOptions and StatusNotifyReturn properties, as in the following example:

```
&email.StatusNotifyOptions = "SUCCESS,FAILURE";  
&email.StatusNotifyReturn = "HDRS";
```

You can use the IsReturnReceiptReqd property to specify if a return receipt should be sent when the mail server receives and opens the email. This property only works if the underlying SMTP server supports this feature. The following is an example of using this property:

```
&email.IsReturnReceiptReqd = True;
```

Priority

There is no SMTP standard for message priority. Most email applications use an X-Priority value of 3 for messages with "normal" priority. More important messages have lower values and less important messages have higher values. In most cases, urgent messages have an X-Priority value of 1. The priority code used with the Mail classes, and set in the headers are as follows:

1. Highest Priority
2. High Priority
3. Normal
4. Low Priority
5. Lowest Priority

The default value is 3, that is, normal priority.

Different email programs render these different values in a variety of ways, usually using some kind of colored symbols or arrows.

Set the priority for an email using the Priority property. The following is an example:

```
&Email.Priority = 2;
```

MCFBodyPart and MCFEmail Considerations

Both MCFBodyPart and MCFEmail objects are used for both inbound and outbound email. The following sections specify which methods and properties are generally used for inbound, and which are used for outbound, for the different objects.

Inbound and Outbound MCFBodyPart Class Methods

All of the methods except the GetUnparsedHeaders method for the MCFBodyPart class are used with outbound email. The following methods are generally used with inbound email as well:

- GetHeader
- GetHeaderNames
- GetUnparsedHeaders

Inbound and Outbound MCFBodyPart Class Properties

The following properties are primarily used with inbound email. Note that some of these properties are also used with outbound email.

- AttachmentURL
- ContentType
- Filename
- IsAttachment
- Text

The following properties are primarily used with outbound email. Note that some of these properties are used with inbound email as well.

- ContentLanguage
- ContentType
- Description
- Disposition
- FileName
- FilePath
- FilePathType
- Multipart
- Text

Inbound and Outbound MCFEmail Class Properties

The following properties are used with inbound email. Note that most of these properties are also used with outbound email.

- From

- RefIDs
- ReplyIDs
- ReplyTo
- Sender
- Subject

The following properties are used with outbound email. Note that many of these properties are also used with inbound email.

- BCC
- BounceTo
- CC
- From
- Importance
- Priority
- Recipients
- RefIDs
- ReplyIDs
- ReplyTo
- Sender
- Sensitivity
- Subject

Related Topics

- [MCFBodyPart Class Methods](#)
In the following, we discuss the MCFBodyPart class methods. The methods are described in alphabetical order.
- [MCFBodyPart Class Properties](#)
In this section we discuss the MCFBodyPart class properties. The properties are described in alphabetical order.
- [MCFEmail Class Properties](#)
In this section, we discuss the MCFEmail class properties. The properties are discussed in alphabetical order.

Retrieving Email From a Mail Server With the MCFGetMail Class

Use the MCFGetMail class to retrieve email from your mail server and load it in a rowset. After you have decided that an email needs to be saved to the PeopleSoft database, use MCFMailStore class.

Structure of Rowset Used for Email Information

The following list describes the different levels of the rowset that contains email information, and what each level contains.

Field or Control	Description
Level 0	The first row at level zero is empty except for the number of rows contained within level zero and return status. The first row contains the return status for the entire batch of emails. Apart from the return status of the whole batch, each individual row has its own EMAIL_RET_STATUS. When a fatal error occurs, such as a connector size overflow, an IB overflow, or an error accessing attachments, the return status is copied to the first row. Subtle errors like unsupported encoding for a part of a individual email appear in the return status of that email only. Each row after the first row contains information about an individual email, such as the header information, the time received, and so on.
Level 1	Level one is where the parts of an email reside. The level one child rowsets are linked to the parent rowset in level zero by the MCF_EMAIL_ID, a unique ID assigned by PeopleSoft.

 Note

Multipurpose Internet Mail Extensions (MIME) is an Internet standard for representing multipart and multimedia data in email. It enables email to be exchanged between different email systems. The parts may be nested. PeopleSoft embeds the JavaMail API to implement support for the MIME standard. However, all parts of an email are represented in PeopleSoft as level one rowsets, regardless of the hierarchy that existed in the original email.

The following table describes the fields within the rowset at level zero.

Field	Description
MCF_ATTACH_LIST	Contains a list of all the file names that are attachments for a particular email. Multiple items are separated by a semicolon (;).
MCF_IS_ATT_URL	This is a Boolean value indicating whether the email body is located in the MCF_EMAIL_TEXT or in the attachment directory. If this value is 1 (true), the email body is located in the attachment directory and can be accessed using the MCF_ATT_URL value. If this value is 0 (false), then the email body is located in MCF_EMAIL_TEXT.

Field	Description
MCF_ATT_URL	This URL enables you to view an attachment. This URL is viewable only if the corresponding email has been authorized for the current user. This value is a relative URL. The URL becomes fully qualified only after the rowset has been saved to the PeopleSoft database and then later retrieved using the MCFMailStore class. The following is a sample URL: <code>http://sundance.example.com/PSAttachServlet/ps/mcfdev1/39297_31030554591_1.gif?contentType=image/gif</code> <i>mcfdev1</i> is the mail user name. <i>39297_31030554591_1.gif</i> is the file name in the attachment directory. <i>contentType</i> is used by the browser to open a viewer associated with this type. The filename of the downloaded attachment is constructed by using the email's unique ID and the part number. Note: Downloading the same emails twice from the mail server overwrites the associated files in the directory. If the same email is stored twice in the PeopleSoft database, the system creates two separate rows. If you delete either one of these rows, the system deletes the associated files in the directory. To avoid this situation, delete emails from the mail server after you have retrieved them. See AuthorizeEmailAttach method: MCFMailStore class.
MCF_IBNODE_NAME	Identifies the name of the Integration Broker node that received the email, such as <code>MCF_GetMail</code>. The system uses this value to construct the fully qualified URL required for viewing attachments.
MCF_ATTACH_SIZES	Indicates the size of the attachments associated with an email. Multiple values are separated by a semicolon (;). The attachment sizes appear in the same order as the file names in <code>MCF_ATTACH_LIST</code>.
MCF_EMAIL_FROM	Indicates the email account that sent the email, such as <code>jsmith@example.com</code> .
MCF_DTTM_RECV	Indicates the time that the mail server received the email. Note: If you are using a Post Office Protocol 3 (POP3) mail server, this field may not be populated.
MCF_OFFSET_RECV	Indicates the time zone of the mail server that received this email. Note: This field contains the time zone of the integration gateway used to fetch this email.

Field	Description
MCF_DTTM_SENT	Indicates the time that the email was sent.
MCF_OFFSET_SENT	Indicates the time zone of the mail server that sent this email. Note: Currently, this field contains the time zone of the integration gateway used to fetch this email.
MCF_DTTM_SAVED	Records the date and time that the PeopleSoft system saved an email to the PeopleSoft database. If you use a POP3 mail server, PeopleSoft recommends using this value as the base, or starting point, for any time-sensitive transactions.
MCF_EMAIL_SENDER	This is the reply to address. This supports a mail feature in which users can send an email from one account, but when the receiver chooses to reply, the system addresses the email to a different account. For instance, sales representatives may send an email from their personal email account, as in tom_sawyer@example.com, but when customers reply, the email is addressed to sales@example.com.
MCF_EMAIL_TEXT	Represents the text that was delivered in the body of the email. Before the email is downloaded, this field contains the body of the email. After the email has been downloaded, this field is blank. Check the MCF_IS_ATT_URL value to determine whether your email text resides in this field or the attachment directory. PeopleSoft relies on the originating email client embedding encoding information to determine character set. For example, Content-type: text/plain; charset=Big5
MCF_NOTIFY_CC	Indicates the parties who were copied (carbon copied) on the email. Multiple addresses are separated by a semicolon (;).
MCF_NOTIFY_TO	Indicates the parties who received the email. Multiple addresses are separated by a semicolon (;).
MCF_UID_LIST	This contains a unique identifier created by POP3 or an IMAP4 mail server. It is guaranteed to be unique within a particular mail box. Note: The DeleteEmail method also uses this value when deleting a list of emails. When deleting emails, this field can contain multiple values separated by a space.

Field	Description
MCF_WL_SUBJECT	Contains the subject of the email. A maximum of 254 characters is allowed. PeopleSoft relies on the originating email client embedding encoding information to determine character set. For example: Email Subject: Subject: =?Big5?B?uvuqWLBPqsy67qZYs/i+yS+kpLDqqXik6Ldztdg=?= =?Big5?B?uvSlSKT0pEilwbr0MzCk6bVvqu2q+KTloUGkaqRP?==?Big5?B?scCxUqa/v0GlwQ==?=? where ?Big5? is the prefixed encoding information.
MCF_RET_STATUS	Represents where the system stores the return status of a particular mail class method.
MCF_EMAIL_STATUS	This field is not currently used.
MCF_NUMROWS	Indicates the number of rows (level one child rowsets) that contain parts of a particular email. For example, if an email has two child rowsets associated with it at level one, this value would be 2. Note: For row one of the level zero rowset, this field reflects the number of emails in this rowset. If you fetch 10 emails, the rowset contains 11 rows, but the MCF_NUMROWS value in row 1 equals 10. Row 1 of the level zero rowset never contains an email.
MCF_EMAIL_MSG_ID	This is the globally unique identifier for this email. This ID is generated by the mail server that sent this email.
MCF_REPY_TO	This is the reply to field.
MCF_REF_IDS	Use this field for the reference header fields of the message.
MCF_REPLY_IDS	This value contains the email address that the email can reply to.
MCF_MSG_SIZE	Represents the total size of the entire email. This value includes the sizes of attachments.
MCF_EMAIL_LANG_CD	This value reflects the language code of the Integration Broker node that received this email. Note: PeopleSoft recommends setting up email accounts that are dedicated to one language such as, support_french@example.com and support_english@example.com. This enables you to anticipate the language of the email you read into your system. In turn, configure separate Integration Broker nodes to handle each of the languages you support. There are no language recognition procedures within the PeopleSoft system.

Field	Description
MCF_USER	Represents the user account (mail box) on the mail server that received the email.
MCF_SERVER	Represents the mail server that received the email.
MCF_ERROR_COUNT	Used to return the number of messages that caused errors during processing on the target connector.
MCF_QUARANTINE_COUNT	Used to return the number of messages that caused errors during processing on the target connector and were successfully moved to the quarantine folder (This value is always 0 for POP3).
MCF_CONTENT_TYPE	This is the content type of the email itself. For example, a content type could be text/plain, text/html, or multipart/alternative.
MCF_EMAIL_HEADERS	This field is used to return the email message headers. It contains the raw headers in RFC 822 format. The MCFHeaders class can be used to parse the contents of this field.

The following table describes the fields within the rowset at level one. This rowset contains the parts of the email.

Field	Description
MCF_ATT_URL	This is the URL of an associated attachment in the attachment directory. This URL is a relative value when this rowset is first received from the mail server and stored in the database. It only becomes a fully qualified URL once you retrieve the rowset using the MCFMailStore class. Keeping the URL a relative value enables you to make changes within the system without breaking the URL.
MCF_IS_ATT_URL	This is a Boolean value indicating whether the email part is located in the MCF_EMAIL_TEXT or on the attachment directory. If this value is 1 (true), the email part can be accessed using the MCF_ATT_URL value. If this value is 0 (false), then the email part is located in MCF_EMAIL_TEXT.
MCF_FILENAME	Represents the file name for an attachment, such as revenue.xls or resume.doc. The file name can be used as a read-only label on the page used by end users to view attachments. For example, the file name may appear next to the link that opens the attachment. Note: Not all parts have file names.
MCF_FILE_DATA	This field is not currently used.

Field	Description
MCF_EMAIL_HEADERS	This field is used to return the email part headers. It contains the raw headers in RFC 822 format. The MCFHeaders class can be used to parse the contents of this field.
MCF_EMAIL_TEXT	Contains the text content of the email part.

Note

Although the same rowset structure is used for retrieving email from the mail server and for retrieving email from the PeopleSoft database, not all of the fields apply to each situation. For example, when you first retrieve email from the mail server, the rowset does not contain the fully qualified URL to any attachments.

Note

After an email is saved to the database, always use the methods in the MailStore application package class to access the email. Do not read directly from the mail tables.

Error Messages Returned by MCFGetMail Class Methods

The GetMail Integration Broker connector returns message codes denoting status. These return codes apply to all the methods within the MCFGetMail class. The following are returned in MCF_RET_STATUS field, and by the Status property.

Field or Control	Description
0	Success.
1	Connector size overflow. The size of the email requested exceeds the value in MCF_EmSz_Conn. The system returns the header information for this email with the return status set to 1. See MultiChannel Framework: Configuring GETMAILTARGET Connector Properties.

Field or Control	Description
2	Integration Broker threshold size overflow. The size of the email requested exceeds the value in MCF_EmSz_IB. This happens when the size of the XML message constructed to transfer emails from the mail server to the database exceeds the threshold value. If there are any more emails to be processed in the current batch, the system does not fetch them from the mail server. For example, suppose your program fetches 20 emails at a time from the mail server, and this error occurred on the tenth email. In this case, the system processes the tenth email, but emails 11–20 are still be on the mail server. See MultiChannel Framework: Configuring GETMAILTARGET Connector Properties.
3	Cannot delete all the messages from the mail server.
4	Connecting to the mail server failed.
5	The attachments to be deleted were not found.
6	At least one attachment cannot be deleted.
7	Unsupported encoding.
8	Cannot write to the attachment directory.
9	Messages were downloaded to directory and deleted from mail server. This status code occurs when an exception occurs in Integration Broker while storing the emails to the database. The exception might occur due to invalid characters in the email. If the email is left on the mail server, the same exception will occur repeatedly, preventing you from fetching further emails. Because the header might contain these invalid characters also, only MCF_RET_STATUS, MCF_MSG_SIZE, MCF_UID_LIST, date time fields, MCF_IS_ATT_URL, MCF_ATT_URL are set. There is no way to determine which email caused the exception, so the system writes all the emails to the directory. All the emails in the batch are deleted from the mail server.
Field or Control	Description
10	Email content error. One example of this is unsupported encoding.
Field or Control	Description
11	Returned if attempting to create a mail server folder while using the POP3 protocol.
12	Folder creation on mail server failed.

Field or Control	Description
13	GetMail connector internal error.
14	Email digital signature not verified. Note: This error code only applies to reading digitally signed emails (or emails that are both signed and encrypted).
15	An error occurred while attempting to decrypt or decode S/MIME data. Note: This error code only applies to reading digitally signed emails (or emails that are both signed and encrypted).

See [Status property: MCFInboundEmail class](#).

Mail Classes Constructors

The following section provides examples of the mail class constructors.

MCFBodyPart method: mail classes class

Example

```
Local PT_MCF_MAIL:MCFBodyPart &text = create PT_MCF_MAIL:MCFBodyPart();
```

MCFGetMail method: mail classes class

Example

```
Local MCFGetMail &gm = create MCFGetMail();
```

MCFOutboundEmail method: mail classes class

Example

```
Local PT_MCF_MAIL:MCFOutboundEmail &eMail =  
create PT_MCF_MAIL:MCFOutboundEmail();
```

MCFMailStore method: mail classes class

Example

```
Local MCFGetMail &sm = create MCFMailStore();
```

SMTPSession method: mail classes class

Example

```
Local PT_MCF_MAIL:SMTPSession &commonSession =  
create PT_MCF_MAIL:SMTPSession();
```

MCFBodyPart Class

Use the MCFBodyPart class to send email with attachments, HTML, or other non-standard text information.

MCFBodyPart Class Methods

In the following, we discuss the MCFBodyPart class methods. The methods are described in alphabetical order.

AddHeader method: MCFBodyPart class

Syntax

```
AddHeader(HeaderName, HeaderValue)
```

Description

Use the AddHeader method to add a header to the body part. This method allows for email server customizations. Some commonly used headers are already exposed as properties, such as ContentType and ContentLanguage. Advanced applications can adapt this technique to meet their own requirements. These headers can be either standard SMTP headers or custom headers starting with "X-".

Parameters

Parameter	Description
<i>HeaderName</i>	Specify the name of the header that you want to add. This parameter takes a string value.
<i>HeaderValue</i>	Specify the actual text of the header, as a string.

Returns

None.

Example

```
Local PT_MCF_MAIL:MCFOutboundEmail &email = create  
PT_MCF_MAIL:MCFOutboundEmail⇒  
();  
Local string &TestName = "Custom Header";  
&email.From = &def.From;  
&email.Recipients = &def.Recipients;
```

```
&email.SMTPServer = &def.SMTPServer;  
&email.Subject = &TestName;  
&email.Text = &TestName;  
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP2");  
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP3");  
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP4");  
&res = &email.Send();
```

Related Topics

- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetHeader method: MCFBodyPart class

Syntax

`GetHeader(HeaderName)`

Description

Use the GetHeader method to return the value of the specified header.

This method is primarily used with inbound email messages.

Parameters

Parameter	Description
<i>HeaderName</i>	Specify the name of the header that you want to access the values for, as a string. The matching of header names is case insensitive.

Returns

An array of string containing the header values. If the header is not present, returns an array of length zero.

Related Topics

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.
- [AddHeader method: MCFBodyPart class](#)

- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetHeaderCount method: MCFBodyPart class

Syntax

```
GetHeaderCount()
```

Description

Use the GetHeaderCount method to return the number of headers.

Parameters

None.

Returns

An integer, representing the number of headers present.

Related Topics

- [AddHeader method: MCFBodyPart class](#)
- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetHeaderName method: MCFBodyPart class

Syntax

```
GetHeaderName(Index)
```

Description

Use the GetHeaderName to return the name of the header that is located at *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the header you want to access.

Returns

A string.

Related Topics

- [AddHeader method: MCFBodyPart class](#)
- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetHeaderNames method: MCFBodyPart class

Syntax

```
GetHeaderNames()
```

Description

Use the GetHeaderNames method to return an array containing the names of all the headers.

This method is primarily used with inbound email messages.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddHeader method: MCFBodyPart class](#)
- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetHeaderValues method: MCFBodyPart class

Syntax

```
GetHeaderValues(Index)
```

Description

Use the `GetHeaderValues` method to return the value for the header located at the position specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the header whose value you want to access.

Returns

An array of string.

Related Topics

- [AddHeader method: MCFBodyPart class](#)
- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetUnparsedHeaders method: MCFBodyPart class](#)

GetUnparsedHeaders method: MCFBodyPart class

Syntax

```
GetUnparsedHeaders()
```

Description

Use the `GetUnparsedHeaders` method to return all of the headers in the body part without any formatting occurring.

Parameters

None.

Returns

A string containing the headers.

Related Topics

- [AddHeader method: MCFBodyPart class](#)
- [GetHeader method: MCFBodyPart class](#)
- [GetHeaderCount method: MCFBodyPart class](#)
- [GetHeaderName method: MCFBodyPart class](#)
- [GetHeaderNames method: MCFBodyPart class](#)
- [GetHeaderValues method: MCFBodyPart class](#)

SetAttachmentContent method: MCFBodyPart class

Syntax

```
SetAttachmentContent({FilePath | FileURL}, FilePathType, FileName, FileDescr,  
OverrideContentType, OverrideCharset)
```

Description

Use the SetAttachmentContent method to specify the body (content) of this body part from a file.

Use the *FilePathType* parameter to specify if the file path is relative or absolute. If it's an absolute path, the file path could be a file on the local machine, a network folder, or a fully-qualified URL.

Parameters

Parameter	Description
<i>FilePath FileURL</i>	You can either specify the file path to the file, or a URL to the file. Depending on the <i>FilePathType</i> parameter, you may specify either a relative or absolute file path to the file. This parameter should include the file name and extension of the file. If you specify a URL address where the file is located, it must be an absolute URL. This URL should include the actual name of the file. If you specify a URL address, you must specify the <i>FilePathType</i> parameter as <i>%FilePath_Absolute</i>.
<i>FilePathType</i>	Specify the path type for the file, whether it is an absolute or relative path. The values are: • <i>%FilePath_Absolute</i> — the file path is an absolute path. • <i>%FilePath_Relative</i> — the file path is a relative path.
<i>FileName</i>	Specify the name of the file that you want to attach, as a string. You must include the file extension as well.
<i>Description</i>	Specify a description of the file.
<i>OverrideContentType</i>	The system detects the content type of the attachment using the file location and name. Specifying <i>OverrideContentType</i> overrides the system detected content type. The character set can also be included in the Content-Type. For example, "text/plain; charset=US-ASCII"
<i>OverrideCharset</i>	Specify a character set to be used to override the existing character set.

Returns

None.

Example

The following uses an absolute path to set the content:

```
&image.SetAttachmentContent("///file:C:/User/Documentum/XML%20Applications/  
proddoc⇒  
/peoplebook_upc/peoplebook_upc.dtd",  
%FilePath_Absolute, "sample.jpg", "This is a sample image!", "", "");
```

The following uses a relative path to set the content:

```
&attach1.SetAttachmentContent("Ocean Wave.jpg", %FilePath_Relative,  
"Ocean Wave.jpg", "Ocean Wave", "", "");
```

The following uses a URL to set the content:

```
&attach1.SetAttachmentContent("http://www.yahoo.com/members_agreement",  
%FilePath_Absolute, "hotmail.htm", "Hotmail Home page", "", "");
```

Related Topics

- [AddAttachment method: MCFEmail class](#)

MCFBodyPart Class Properties

In this section we discuss the MCFBodyPart class properties. The properties are described in alphabetical order.

AttachmentURL property: MCFBodyPart class

Description

Use this property to specify the URL for the attachment for this body part, as a string.

The URL must be an absolute URL.

This property is read/write.

Charset property: MCFBodyPart class

Description

Use this property to specify the character set for the text or the attachment.

You can also specify this property using the SetAttachmentContent method, or the ContentType property.

This property is read/write.

Related Topics

- [ContentType property: MCFBodyPart class](#)
- [SetAttachmentContent method: MCFBodyPart class](#)

ContentType property: MCFBodyPart class

Description

Use this property to specify the content type of this body part.

You can specify the content type with the SetAttachmentContent method.

You can also use this property to specify the character set. For example, "text/plain; charset=US-ASCII".

This property is read/write.

Related Topics

- [SetAttachmentContent method: MCFBodyPart class](#)
- [Charset property: MCFBodyPart class](#)

Description property: MCFBodyPart class

Description

Use this property to specify a description of the attachment. You should only use this property if the content is an attachment.

This property is read/write.

Disposition property: MCFBodyPart class

Description

Use this property to specify how the body part is presented in the received mail.

Some email clients ignore the setting of this property and present body parts either inline or as file attachments.

Valid values for this property are:

Value	Description
Attachment	The body part is shown as a file attachment.
Inline	The body part is shown in the body itself.

This property is read/write.

Filename property: MCFBodyPart class

Description

If you are adding an attachment to the email, use this property to specify the name of the file.

PeopleSoft recommends that you keep the file extension specified with this property the same as the original extension found in the file path, otherwise client applications may not be able to display it properly.

This property is read/write.

FilePath property: MCFBodyPart class

Description

Specify the path for the file that contains the contents of this email.

Whether this is a relative or absolute path depends on the FilePathType property.

You can also specify a URL to the file using this property, if the FilePathType property is specified as %FilePath_Absolute.

If you specify a value for this property, the 'Text' content is ignored.

This property is read/write.

Related Topics

- [FilePathType property: MCFBodyPart class](#)

FilePathType property: MCFBodyPart class

Description

Use this property to specify whether the path specified with the FilePath property is a relative or absolute path. The values for this property are:

Value	Description
%FilePath_Relative	The file path specified with the FilePath property is a relative path.
%FilePath_Absolute	The file path specified with the FilePath property is either an absolute path to a file, or a URL to a file.

If you specify a relative path, the file must be available in the FILES folder of application server folder.

If you specify an absolute path, the file could be on the local machine, in any network folder, or a URL.

This property is read/write.

IsAttachment property: MCFBodyPart class

Description

This property indicates if the body part is an attachment or not. This property returns a Boolean value: true if it is an attachment, false otherwise.

This property is read-only.

MultiPart property: MCFBodyPart class

Description

A body part can contain simple text, one attachment, or a MultiPart object.

If you have assigned a MultiPart object using this property, the text and attachment related properties are ignored.

This property is read/write.

Example

```
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
&mp.SubType = "alternative; differences=Content-type";
&mp.AddBodyPart(&text);
&mp.AddBodyPart(&html);
&email.MultiPart = &mp;
```

Text property: MCFBodyPart class

Description

Use this property to specify the text for the email.

Use the SetAttachmentContent method to specify image or other types of attachments. For a more complex bodypart, build a multipart and set the Multipart property of MCFBodyPart.

This property is read/write.

Related Topics

- [SetAttachmentContent method: MCFBodyPart class](#)

MCFEmail Class

This class inherits many properties from the MCFPart class, and is the superclass class for both the MCFOutboundEmail and MCFInboundEmail classes. Generally, you only use the MCFOutboundEmail and MCFInboundEmail classes. You should only use the MCFEmail class if you are extending the PT_MCF_MAIL application package.

MCFEmail Class Properties

In this section, we discuss the MCFEmail class properties. The properties are discussed in alphabetical order.

BCC property: MCFEmail class

Description

Use this property to specify comma-separated list of addresses of all the blind carbon copy recipients of this email. (A blind carbon copy is a copy of the email that contains all of the text of the email, but does not show any of the other email addresses to which this email was sent.)

This property is read/write.

Related Topics

- [CC property: MCFEmail class](#)

BounceTo property: MCFEmail class

Description

Use this property to specify the email address the system should direct all bounced mail to.

This property is read/write.

CC property: MCFEmail class

Description

Use this property to specify a comma-separated list of addresses that copies of this email are to be sent to (carbon copy.)

This property is read/write.

Related Topics

- [BCC property: MCFEmail class](#)

From property: MCFEmail class

Description

Use this property to specify the email address of the person sending the email.

You can specify more than one address as from in a comma-separated list.

This property is read/write.

Related Topics

- [Recipients property: MCFEmail class](#)
- [ReplyTo property: MCFEmail class](#)
- [Sender property: MCFEmail class](#)

Importance property: MCFEmail class

Description

Use this property to specify the value of the importance header field.

The importance can be set to the following:

- low
- normal
- high

If the Priority property is not set, the system automatically sets it to the corresponding values like 5, 3 and 1.

This property is read/write.

Priority property: MCFEmail class

Description

Use this property to specify the priority of this email.

The values are:

1. Highest Priority
2. High Priority
3. Normal
4. Low Priority
5. Lowest Priority

The default value is 3, that is, normal priority.

This value set with this property is used to set to a header X-Priority field, as this is the most common but non-standard field to show priority. In addition, the corresponding values are set in two header fields: X-MSMail-Priority and Priority. The headers X-Priority or X-MSMail-Priority are set to the corresponding value only if the user does not specify a value.

This property is read/write.

Recipients property: MCFEmail class

Description

Use this property to specify the email addresses of all the main recipients to whom the email is being sent. All the addresses are specified in a comma-separated string.

This property is read/write.

RefIDs property: MCFEmail class

Description

Use this property to specify a value for the REFERENCES header field of the message.

This property is read/write.

ReplyIDs property: MCFEmail class

Description

Use this property to specify a value for the IN-REPLY-TO header field of the message.

This property is read/write.

ReplyTo property: MCFEmail class

Description

Use this property to specify the email address where the reply should be sent. You do not need to specify a value for this property if the value is the same as the From property.

This property is read/write.

Related Topics

- [From property: MCFEmail class](#)

Sender property: MCFEmail class

Description

Use this property to specify the address of the author of the message. You do not need to specify a value for this property if the value for the From property is the same.

This property is read/write.

Related Topics

- [From property: MCFEmail class](#)

Sensitivity property: MCFEmail class

Description

Use this property to specify the value of the sensitivity header field.

The values are:

- personal
- private
- company-confidential

This property is read/write.

SMIMEEncryption property: MCFEmail class

Description

Use this property to enable or disable S/MIME encryption for an email. Set the value to *1* to enable encryption; set the value to *0* to disable encryption. The default is *0*.

You can use this property to override the setting for S/MIME encryption in the psappsrv.cfg or psprcs.cfg file.

This property is read/write.

SMIMESign property: MCFEmail class

Description

Use this property to enable or disable S/MIME digital signature for an email. Set the value to *1* to enable digital signature for an email; set the value to *0* to disable digital signature for an email. The default is *0*.

You can use this property to override the setting for S/MIME digital signature in the psappsrv.cfg or psprcs.cfg file.

This property is read/write.

Subject property: MCFEmail class

Description

Use this property to specify the subject of the email. A subject can only contain 254 characters.

This property is read/write.

Text property: MCFEmail class

Description

Use this property to specify the text of the email.

This property is read/write.

MCFGetMail Class Methods

This section discusses MCFGetMail class methods.

CreateQuarantineFolder method: MCFGetMail class

Syntax

```
CreateQuarantineFolder()
```

Description

Use the CreateQuarantineFolder method to create a quarantine folder on the server. Specify the name of the folder using the QuarantineFolder property

Parameters

None.

Returns

A Boolean value; true if the folder is created, or if it already exists on the server, false otherwise.

Related Topics

- [QuarantineFolder property: MCFGetMail class](#)
- [QuarantineCount property: MCFGetMail class](#)

GetCount method: MCFGetMail class

Syntax

```
GetCount()
```

Description

Use the GetCount method to determine the total number of emails currently stored in a particular email account.

This method does not distinguish between read and unread emails.

This method uses the connection properties set by SetMCFEmail.

If you want to determine the number of emails for an account, and to set your own connection properties, use the GetEmailCount method instead.

Parameters

None.

Returns

Returns the total number of emails stored on the mail server for a particular email account. If the method returns -4, the system could not connect to the mail server using the user name and password passed in the parameter list.

Related Topics

- [GetEmailCount method: MCFGetMail class](#)
- [SetMCFEmail method: MCFGetMail class](#)

GetEmailCount method: MCFGetMail class

Syntax

```
GetEmailCount(user, password, server, node)
```

Description

Use GetEmailCount to determine the number of emails currently stored in a particular email account. GetEmailCount does not distinguish between read and unread email. You can use this value to set limits on loops in your program.

If you want to determine the number of emails for an account using the connection properties set with SetMCFEmail, use the GetCount method instead.

Parameters

Parameter	Description
<i>user</i>	The user name on the mail server, such as “support” or “john_doe”.
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.
<i>node</i>	The Integration Broker node on which the request runs.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, Integration Broker returns an error.

Returns

Returns the total number of emails stored on the mail server for a particular email account. If the method returns –4, the system could not connect to the mail server using the user name and password passed in the parameter list.

Example

```
Local number &email_count;  
  
&email_count = &gm.GetEmailCount(&username, &passwd, &mailserver,  
&node);
```

Related Topics

- [GetCount method: MCFGetMail class](#)
- [SetMCFEmail method: MCFGetMail class](#)

ReadAllEmailHeadersWithAttach method: MCFGetMail class

Syntax

```
ReadAllEmailHeadersWithAttach(user, password, server, node)
```

Description

Use ReadAllEmailHeadersWithAttach to read the headers of all of the emails and a list of associated attachments that are currently stored on the mail server for a particular email account. The details about the emails are returned in the level zero rowset. The actual emails and any associated attachments *are not* returned.

Use this method as a screening method to determine whether to store an email in your PeopleSoft system. For example, if you determine that an email is junk mail, you could delete it

from your mail server. After you determine the allowable email through header information, you can retrieve the physical email and attachments of the allowable emails.

Parameters

Parameter	Description
<i>user</i>	The user name on the mail server, such as “support” or “john_doe”.
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.
<i>node</i>	The Integration Broker node on which the request runs.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, Integration Broker returns an error.

Returns

This method returns rowsets containing email headers.

Example

```
import PT_MCF_MAIL:*;  
  
Local MCFGetMail &gm;  
  
Local Rowset &emails_rs;  
  
&emails_rs = &gm.ReadAllEmailHeadersWithAttach(&username, &passwd, &mailserver  
&node);
```

ReadEmails method: MCFGetMail class

Syntax

ReadEmails(*Count*)

Description

Use the ReadEmails method to read the specified number of emails for this mailbox.

This method uses the connection properties set by SetMCFEmail.

The overall status of the success of this method is available in the Status property.

Parameters

Parameter	Description
<i>Count</i>	Specify the number of emails you want to read.

Returns

An array of MCFInboundEmail.

Related Topics

- [MCFInboundEmail Class Methods](#)
In this section, we discuss the MCFInboundEmail class methods. The methods are described in alphabetical order.
- [Status property: MCFInboundEmail class](#)

ReadEmailsWithAttach method: MCFGetMail class

Syntax

```
ReadEmailsWithAttach(User, password, server, node, count)
```

Description

The ReadEmailsWithAttach method reads the number of emails specified by *count* for a particular user account. If attachments are associated with an email, this method reads the attachments as well.

Parameters

Parameter	Description
<i>User</i>	Specify the user account that contains the emails you want to access, such as “support” or “john_doe”.
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.
<i>node</i>	The Integration Broker node on which the request runs.
<i>count</i>	Specifies the number of emails to read. If count = 0, the method reads <i>all</i> the emails of the user account. If count > 0, the method reads the number specified. For example, if count = 10, the method reads 10 emails.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, Integration Broker returns an error.

Returns

This method returns an email within a rowset. Level one of the rowset contains the email parts. Level zero row 1 only contains values for MCF_NUMROWS and MCF_RET_STATUS.

Example

```
import PT_MCF_MAIL:*;  
  
Local MCFGetMail &gm;  
  
Local Rowset &emails_rs;  
  
&emails_rs = &gm.ReadEmailsWithAttach(&username, &passwd, &mailserver  
&node, &email_count);
```

Related Topics

- [ReadEmailWithAttach method: MCFGetMail class](#)

ReadEmailsWithUID method: MCFGetMail class

Syntax

ReadEmailsWithUID(*UID*)

Description

Use the ReadEmailsWithUID method to read and return an email based on a unique identifier *UID*. This method uses the connection properties set by SetMCFEmail. Emails that have an attachment are also read.

Parameters

Parameter	Description
<i>UID_List</i>	The UID is the unique identifier of the email. This parameter is only unique within a particular user account. POP3 and IMAP 4 mail servers automatically create a unique identifier for an email when the server receives the email. The list can contain multiple values, each separated by a space.

Returns

A reference to an array of MCFInboundEmail.

Related Topics

- [MCFInboundEmail Class Methods](#)
In this section, we discuss the MCFInboundEmail class methods. The methods are described in alphabetical order.

ReadEmailWithAttach method: MCFGetMail class

Syntax

```
ReadEmailWithAttach(User, password, server, node, UID)
```

Description

Use the ReadEmailWithAttach method to read and return an email based on a unique identifier (*UID*) for the specific email to be read. If attachments are associated with this email, ReadEmailWithAttach fetches those as well.

Parameters

Parameter	Description
<i>user</i>	The user name on the mail server, such as “support” or “john_doe”.
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.
<i>node</i>	The Integration Broker node on which the request runs.
<i>UID</i>	The unique identifier of the email. This parameter is only unique within a particular user account. POP3 and IMAP 4 mail servers automatically create a unique identifier for an email when the server receives the email. You may specify more than one UID, each separated by a space.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, Integration Broker returns an error.

Returns

This method returns an email within a rowset. Level one of the rowset contains the email parts. Level zero row 1 only contains values for MCF_NUMROWS and MCF_RET_STATUS.

Example

```
import PT_MCF_MAIL:*;  
  
Local MCFGetMail &gm;  
  
Local Rowset &emails_rs;
```

```
&emails_rs = &gm.ReadEmailWithAttach(&username, &passwd, &mailserver, &node,  
&UID);
```

Related Topics

- [ReadEmailsWithAttach method: MCFGetMail class](#)

ReadHeaders method: MCFGetMail class

Syntax

```
ReadHeaders()
```

Description

Use the ReadHeaders method to read the headers of all emails currently on the server. This method also returns the attachment information for all emails (names and sizes.)

This method uses the connection properties set by SetMCFEmail.

The overall success of the method is available using the Status property.

Parameters

None.

Returns

An array of MCFInboundEmail objects.

Related Topics

- [MCFInboundEmail Class Methods](#)
In this section, we discuss the MCFInboundEmail class methods. The methods are described in alphabetical order.
- [SetMCFEmail method: MCFGetMail class](#)

RemoveEmail method: MCFGetMail class

Syntax

```
RemoveEmail(user, password, server, node, UID list)
```

Description

Based on values in the unique identifier list, RemoveEmail deletes emails from the user account on the mail server. It is important to delete emails from the mail server once they are read into PeopleSoft. If you do not delete emails from the mail server after they are read into PeopleSoft, the rowset contains the same collection of email the next time you retrieve email from the mail server.

Parameters

Parameter	Description
<i>user</i>	The user name on the mail server, such as “support” or “john_doe”.
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.
<i>node</i>	The Integration Broker node on which the request runs.
<i>UID list</i>	The UID list contains the unique identifier values for the emails that need to be deleted from the mail server. The list can contain multiple values separated by a space.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, the Integration Broker returns an error.

Returns

A Boolean value, indicating the status of the deletion process. If the email has been successfully deleted, this method returns True. Otherwise the method returns False.

Example

```
Local MCFGetMail &GM;  
Local boolean &del_status;  
Local string &uid_list = "";  
Local string &msg_str;  
  
If (&uid_list <> "") Then  
    &del_status = &GM.RemoveEmail(&user, &password, &server, &ibnode,  
&uid_list);  
    &msg_str = "Email(s) deleted from the Mail Server with UID = " |  
&uid_list;  
    MessageBox(0, "", 0, 0, &msg_str);  
End-If;
```

Related Topics

- [RemoveEmails method: MCFGetMail class](#)

RemoveEmails method: MCFGetMail class

Syntax

```
RemoveEmails(UID_List)
```

Description

Use the RemoveEmails method to delete emails from an account on the mail server, based on the *UID_list*. It is important to delete emails from the mail server once they are read into PeopleSoft. If you do not delete emails from the mail server after they are read into PeopleSoft, the rowset contains the same collection of email the next time you retrieve email from the mail server.

Parameters

Parameter	Description
<i>UID_List</i>	The UID list contains the unique identifier values for the emails that need to be deleted from the mail server. The list can contain multiple values separated by a space.

Returns

An array of string containing UIDs of the messages that were successfully removed, separated by semicolons.

Related Topics

- [RemoveEmail method: MCFGetMail class](#)

SetMCFEmail method: MCFGetMail class

Syntax

```
SetMCFEmail(user, password, server, node)
```

Description

Use the SetMCFEmail method to set the connection properties for subsequent method calls.

This method is a shortcut for setting the UserId, Password, MailServer, and IBNode properties.

Parameters

Parameter	Description
<i>user</i>	The user name on the mail server, such as "support" or "john_doe".
<i>password</i>	The password associated with the specified user name.
<i>server</i>	The name of the mail server handling the specified user account.

Parameter	Description
<i>node</i>	The Integration Broker node on which the request runs.

Note

If the value of any of these parameters is null, the method uses default values stored on the specified node. If the node is not specified, the integration broker returns an error.

Returns

None.

Related Topics

- [GetCount method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [ReadHeaders method: MCFGetMail class](#)

MCFGetMail Class Properties

In this section we discuss the MCFGetMail class properties. The properties are described in alphabetical order.

AttachmentRoot property: MCFGetMail class

Description

Use this property to specify the root directory where the attachments are stored. If not specified, the value from the node is used.

Valid metastrings that can be included in the value for this property are:

Parameter	Description
%CURRDATE%	Current date in YYYYMMDD format
%CURRHOUR%	Current hour in 24-hour format (00-23)
%DBNAME%	Current value of %DbName system variable.
%OPRID%	Current value of %UserId system variable.

This property is read/write.

Example

To have the attachment root directory change hourly, you could use the following code example:

```
&MyEmail.AttachmentRoot = "c:\temp\%CURRDATE%\%CURRHOUR%\";
```

ContentTypes property: MCFGetMail class

Description

Use this property to specify content types that should be returned in the message or part text rather than stored in the directory that contains the attachments. Specify content types in a comma separated list. For example: "text/html, text/xml".

Note

"Text/plain" is always returned in the text field and does not need to be included.

If not specified, the value from the node is used.

This property is read/write.

ErrorCount property: MCFGetMail class

Description

This property returns the number of messages that caused errors during processing on the target connector.

You should use this property after you use the ReadHeaders, ReadEmails, ReadEmailsWithUID, or RemoveEmails methods.

This property is read-only.

Related Topics

- [ReadHeaders method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [RemoveEmails method: MCFGetMail class](#)

IBNode property: MCFGetMail class

Description

This property returns the name of the Integration Broker node on which a request ran, such as MCF_GetMail.

This property is set by the SetMCFEmail method. It is used by ReadHeaders, ReadEmails, ReadEmailsWithUID, RemoveEmails, and CreateQuarantineFolder methods.

This property is read/write.

Related Topics

- [ReadHeaders method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [RemoveEmails method: MCFGetMail class](#)
- [CreateQuarantineFolder method: MCFGetMail class](#)

MailServer property: MCFGetMail class

Description

This property returns the name of the mail server that received the email.

This property is set by the SetMCFEmail method. It is used by ReadHeaders, ReadEmails, ReadEmailsWithUID, RemoveEmails, and CreateQuarantineFolder methods.

This property is read/write.

Related Topics

- [ReadHeaders method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [RemoveEmails method: MCFGetMail class](#)
- [CreateQuarantineFolder method: MCFGetMail class](#)

Password property: MCFGetMail class

Description

This property returns the password associated with the userID that was used to get the email.

This property is set by the SetMCFEmail method. It is used by ReadHeaders, ReadEmails, ReadEmailsWithUID, RemoveEmails, and CreateQuarantineFolder methods.

This property is read/write.

Related Topics

- [ReadHeaders method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [RemoveEmails method: MCFGetMail class](#)
- [CreateQuarantineFolder method: MCFGetMail class](#)

QuarantineCount property: MCFGetMail class

Description

This property returns the number of email messages that caused errors during processing on the target connector and were successfully moved to the quarantine folder.

This property is valid after calls to `ReadHeaders`, `ReadEmails`, `ReadEmailsWithUID`, and `RemoveEmails`.

This property is read-only.

Related Topics

- [QuarantineFolder property: MCFGetMail class](#)
- [ReadHeaders method: MCFGetMail class](#)
- [ReadEmails method: MCFGetMail class](#)
- [ReadEmailsWithUID method: MCFGetMail class](#)
- [RemoveEmails method: MCFGetMail class](#)

QuarantineFolder property: MCFGetMail class

Description

Use this property to specify the name of the quarantine folder. If not specified, the value from the node will be used.

The name must adhere to whatever naming restrictions are imposed by the mail server in use. There is no built-in validation of the folder name.

The following types of errors can cause an email to be moved to the quarantine folder:

- Connector size overflow.
- Unsupported encoding.
- Unknown Java exception.
- Javamail content error.
- No attachment directory.
- Mail parse exception.

This property is read/write.

Related Topics

- [QuarantineCount property: MCFGetMail class](#)

Status property: MCFGetMail class

Description

This property returns the status of the last mail server operation.

See [Error Messages Returned by MCFGetMail Class Methods](#).

This property is valid after calls to ReadHeaders, ReadEmails, ReadEmailsWithUID, and RemoveEmails.

This property is read-only.

UserID property: MCFGetMail class

Description

This property returns the user ID (mail box) on the mail server that received the email.

This property is set by SetMCFEmail. It is used by ReadHeaders, ReadEmails, ReadEmailsWithUID, RemoveEmails, and CreateQuarantineFolder methods.

This property is read/write.

MCFInboundEmail Class

This class inherits many properties from the MCFEmail class, which in turn inherits many properties from the MCFPart class. Generally, you use only the subclasses, MCFInboundEmail and MCFOutboundEmail, and not the superclasses.

MCFInboundEmail Class Methods

In this section, we discuss the MCFInboundEmail class methods. The methods are described in alphabetical order.

DumpToFile method: MCFInboundEmail class

Syntax

```
DumpToFile(&File)
```

Description

Use the DumpToFile method to write information from the email to an already instantiated file.

This method copies the information from the following email properties, placing each on a separate line:

- ContentType
- IsAttachment
- AttachmentURL
- Text

Whether the information is appended to the bottom of the file or if it overwrites the file depends on how you instantiated the file object.

Parameters

Parameter	Description
<i>&File</i>	Specify an already instantiated file object that you want to write the email data to.

Returns

None.

Example

```
Local File &BI_FILE;
&BI_FILE = GetFile("mcfdata.out", "w", "UTF8");

Local PT_MCF_MAIL:MCFGetMail &gm;
Local number &ret_status, &nemails, &i;
&gm = create PT_MCF_MAIL:MCFGetMail();

Local array of PT_MCF_MAIL:MCFInboundEmail &emails;
&gm.SetMCFEmail(&user, &password, &server, &ibnode);

&emails = &gm.ReadEmails(0);
If (&gm.StatusCheck(&BI_FILE) = False) Then
    Return;
End-If;

&nemails = &emails.Len;
&ret_status = &gm.Status;
If &nemails > 0 Then
    For &i = 1 To &nemails
        &BI_FILE.WriteLine(MsgGetText(162, 1615, "Message Not Found", &i));
        &emails [&i].DumpToFile(&BI_FILE);
    End-For;
End-If;
```

Related Topics

- [Understanding File Layout](#)
PeopleTools supports reading and writing to plain text files, and to files that have a format based on a File Layout definition that has been created in Application Designer.
- PeopleCode Language Reference: GetFile function

GetAttachments method: MCFInboundEmail class

Syntax

```
GetAttachments()
```

Description

Use the GetAttachments method to return the attachments with this email.

Parameters

None.

Returns

An array of MCFBodyPart objects. The methods returns an array of length 0 if there are no attachments

Related Topics

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.
- [MCFBodyPart Class Methods](#)
In the following, we discuss the MCFBodyPart class methods. The methods are described in alphabetical order.

GetFrom method: MCFInboundEmail class

Syntax

```
GetFrom()
```

Description

Use the GetFrom method to split the semicolon delimited list of addresses in the From property into an array of addresses.

Parameters

None.

Returns

An array of string. Each item in the array contains an email address.

Related Topics

- [From property: MCFEmail class](#)

GetParts method: MCFInboundEmail class

Syntax

```
GetParts()
```

Description

Use the GetParts method to return all of this email's parts.

Parameters

None.

Returns

An array of MCFBodyPart objects.

Related Topics

- [MCFBodyPart Class Methods](#)

In the following, we discuss the MCFBodyPart class methods. The methods are described in alphabetical order.

GetSender method: MCFInboundEmail class

Syntax

```
GetSender()
```

Description

Use the GetSender method to split the semicolon delimited list of addresses in the Sender property into an array of addresses.

Parameters

None.

Returns

An array of string.

Related Topics

- [Sender property: MCFEmail class](#)
- [GetFrom method: MCFInboundEmail class](#)

ReadFromDatabase method: MCFInboundEmail class

Syntax

```
ReadFromDatabase(Email_ID)
```

Description

Use the ReadFromDatabase method to load a saved email from the database into this instance of email.

Parameters

Parameter	Description
<i>Email_ID</i>	Specify the ID of the email, as a number.

Returns

A Boolean: true if the email is restored successfully, false otherwise.

Related Topics

- [SaveToDatabase method: MCFInboundEmail class](#)

SaveToDatabase method: MCFInboundEmail class

Syntax

```
SaveToDatabase()
```

Description

Use the SaveToDatabase method to save this instance of email to the database.

Parameters

None.

Returns

A number, representing the email_ID of the saved email.

Related Topics

- [ReadFromDatabase method: MCFInboundEmail class](#)

MCFInboundEmail Class Properties

In this section, we discuss the MCFInboundEmail class properties. The properties are described in alphabetical order.

AttachList property: MCFInboundEmail class

Description

This property returns the list of all the file names that are attachments for a particular email.

Multiple items are separated by a semicolon (;).

This property is read/write.

Related Topics

- [AttachSizes property: MCFInboundEmail class](#)

AttachSizes property: MCFInboundEmail class

Description

This property returns the sizes of the attachments associated with an email.

This property takes a string value, *not* a numeric value. Multiple values are separated by a semicolon (;).

The attachment sizes appear in the same order as the file names in AttachList.

This property is read/write.

Related Topics

- [AttachList property: MCFInboundEmail class](#)

DttmReceived property: MCFInboundEmail class

Description

Use this property to return the date and time an email was received.

**Warning**

If you are using a Post Office Protocol 3 (POP3) mail server, this property may not be populated.

This property takes a DateTime value.

This property is read/write.

Related Topics

- [DttmSaved property: MCFInboundEmail class](#)
- [DttmSent property: MCFInboundEmail class](#)

DttmSaved property: MCFInboundEmail class

Description

This property returns the date and time that the PeopleSoft system saved an email to the database.

If you use a POP3 mail server, PeopleSoft recommends using this value as the base, or starting point, for any time-sensitive transactions.

This property takes a DateTime value.

This property is read/write.

Related Topics

- [DttmReceived property: MCFInboundEmail class](#)
- [DttmSent property: MCFInboundEmail class](#)

DttmSent property: MCFInboundEmail class

Description

This property returns the date time an email was sent.

This property takes a DateTime value.

This property is read/write.

Related Topics

- [DttmReceived property: MCFInboundEmail class](#)

- [DttmSent property: MCFInboundEmail class](#)

IBNode property: MCFInboundEmail class

Description

This property returns the name of the Integration Broker node that received the email, such as MCF_GetMail.

The system uses this value to construct the fully qualified URL required for viewing attachments.

This property is read/write.

Language property: MCFInboundEmail class

Description

This value reflects the language code of the Integration Broker node that received this email.

Note

PeopleSoft recommends setting up email accounts that are dedicated to one language such as, support_french@example.com and support_english@example.com. This enables you to anticipate the language of the email you read into your system. In turn, configure separate Integration Broker nodes to handle each of the languages you support. There are no language recognition procedures within the PeopleSoft system.

This property is read/write.

MessageID property: MCFInboundEmail class

Description

Use this property to return the globally unique identifier for this email.

This ID is generated by the mail server that sent this email.

NotifyCC property: MCFInboundEmail class

Description

This property returns a list of the parties who were copied (carbon copied) on the email. Multiple addresses are separated by a semicolon (;).

This property is read/write.

NotifyTo property: MCFInboundEmail class

Description

This property returns a list of the parties who received the email. Multiple addresses are separated by a semicolon (;).

This property is read/write.

OffsetReceived property: MCFInboundEmail class

Description

This property returns time zone of the mail server that received this email, as a number.

Note

This property contains the time zone of the integration gateway used to fetch this email.

This property is read/write.

Related Topics

- [OffsetSent property: MCFInboundEmail class](#)

OffsetSent property: MCFInboundEmail class

Description

This property returns the time zone of the mail server that sent this email, as a string.

Note

Currently, this property contains the time zone of the integration gateway used to fetch this email.

This property is read/write.

Related Topics

- [OffsetReceived property: MCFInboundEmail class](#)

Server property: MCFInboundEmail class

Description

This property specifies the name of the mail server that received the email.

This property is read/write.

Size property: MCFInboundEmail class

Description

This property returns the total size of the entire email. This value includes the sizes of attachments.

This property is read/write.

Status property: MCFInboundEmail class

Description

This property returns the status of an individual email.

This property is read-only.

UID property: MCFInboundEmail class

Description

This property returns the unique identifier of the email.

This property is only unique within a particular user account. POP3 and IMAP 4 mail servers automatically create a unique identifier for an email when the server receives the email.

This property is read/write.

User property: MCFInboundEmail class

Description

This property returns the user account (mail box) on the mail server that received the email.

This property is read/write.

MCFMailStore Class

Use the MCFMailStore class to write emails to the PeopleSoft database and to retrieve emails from the PeopleSoft database.

Note

When writing emails to the PeopleSoft database, it is assumed that you have previously used the MCFGetMail class to retrieve email into memory. You use the MCFMailStore class immediately after to save the rowsets to the database.

MCFMailStore Import Statements

Here is the import statement:

```
import PT_MCF_MAIL:MCFMailStore;
```

MCFMailStore Methods

This section discusses MCFMailStore class methods.

AuthorizeEmailAttach method: MCFMailStore class

Syntax

```
AuthorizeEmailAttach(email ID, authentication name, authentication type,  
operation)
```

Description

Use AuthorizeEmailAttach to authorize a user or a PeopleSoft role to view attachments associated with an email. By default, no user or role is authorized to view an email; you must explicitly grant authorization with this method. This method authorizes email and the associated attachments one at a time.

Note

If you specify ALL as the user, *any* user can view the attachments for an email.

Parameters

Parameter	Description
<i>email ID</i>	The unique email ID for the email. This is the PeopleSoft email ID, not the ID issued by the mail server.
<i>authentication name</i>	The name of the PeopleSoft user profile or role that needs to be authorized to view the attachments.
<i>authentication type</i>	Specify the type security definition entered as the authentication name. - Specify 2 to indicate a user profile. - Specify 3 to indicate a role.
<i>operation</i>	Specify the type of authorization operation. The following list contains the supported operations. You either add or delete user or role authorization. 1 = ADD 2 = DELETE

Returns

Returns a Boolean value: True for success, False otherwise.

Example

```
&ms = create MCFMailStore();  
&status = &ms.AuthorizeEmailAttach(&emailid, "MCFUser", 2, 1);
```

DeleteEmail method: MCFMailStore class

Syntax

```
DeleteEmail(email ID, forced delete)
```

Description

Deletes the specified email from the PeopleSoft database and corresponding attachments from the directory where they are stored.

Parameters

Parameter	Description
<i>email ID</i>	The ID used to uniquely identify each email within the PeopleSoft database.
<i>forced delete</i>	This parameter is used to set the forced delete flag. It is a Boolean value. A forced delete ensures that the deletion process continues even in cases where the process encounters issues or errors related to an email. For example, with forced delete enabled, the deletion process continues even though the attachments of the email cannot be found or do not exist. True means “force delete” and False means “do not force delete if there is an error in deleting this email.”

Returns

Returns a Boolean value. True for success, False otherwise.

Example

```
Local MCFMailStore &ms;  
  
&ms = create MCFMailStore();  
&forcedel = True;  
&status = &ms.DeleteEmail(&emailid, &forcedel);
```

RetrieveEmail method: MCFMailStore class

Syntax

```
RetrieveEmail(email ID)
```

Description

Use RetrieveEmail to read email from the PeopleSoft database.

Parameters

Parameter	Description
<i>email ID</i>	The ID that uniquely identifies an email within the PeopleSoft database.

Returns

Returns a rowset.

Example

```
Local MCFMailStore &ms;  
Local Rowset &EMAIL_ROWSET;  
  
&ms = create MCFMailStore();  
&EMAIL_ROWSET = &ms.RetrieveEmail(&emailid);
```

StoreEmail method: MCFMailStore class

Syntax

StoreEmail(&rowset, row)

Description

The StoreEmail method inserts an email retrieved from the mail server into the PeopleSoft database. PeopleSoft stores the contents or pieces of the email in rowsets and child rowsets.

Parameters

Parameter	Description
<i>&rowset</i>	The rowset containing the contents of an email. The rowset should be the rowset used by the MCFGetMail class to retrieve emails from the mail server. The rowset should be an already instantiated rowset. Note: The first row of the rowset is empty. The first email in the rowset has a row value of 2.
<i>row</i>	The row number in which the email data is stored. Note: The first row is always empty. Row 2 always contains the first email of the rowset.

Returns

Returns a PeopleSoft email ID to act as the unique key for a particular email within the PeopleSoft database.

Returns 0 if an error occurred.

Example

```
Local MCFGetMail &GM;  
Local Rowset &rs;  
Local number &nemails;  
Local string &email_id;  
  
&GM = create MCFGetMail();  
&rs = &GM.ReadEmailsWithAttach(&user, &password, &server, &ibnode,  
&count);  
  
/* Get the number of emails in the recordset from MCF_NUMROWS field */  
&nemails = &rs.GetRow(1).GetRecord(Record.MCFEM_RES_MAIN).GetField  
(Field.MCF_NUMROWS).Value;  
If (&nemails > 0) Then  
/* First row in the rowset is for header info only. Start writing from  
second row */  
For &i = 1 To &nemails  
    &email_id = &ms.StoreEmail(&rs, &i + 1);  
    If (&email_id <> 0) Then  
        /* Store was successful - email ID returned = &email_id */  
    Else  
        /* Error in storing email */  
    End-If;  
End-For;  
End-If;
```

MCFMailUtil Class

Use the MCFMailUtil class to perform utility operations including encoding and decoding text, validating the email address, validating the email domain name, and determining whether the SMTP email server is available.

MCFMailUtil Class Methods

In this section we discuss the MCFMailUtil class methods. The methods are described in alphabetical order.

DecodeText method: MCFMailUtil class

Syntax

```
DecodeText(TextToDecode, &DecodedText)
```

Description

Use the DecodeText method to decode text. If you only want to decode a word, use the DecodeWord property.

The text is decoded based on the values used with the EncodeText method.

The decoded text is placed in the *&DecodedText* parameter.

This method returns true if successful. If the return value is false, the following MCFMailUtil properties are set accordingly:

- `ErrorDescription`
- `ErrorDetails`
- `ErrorMsgParamsCount`
- `MessageNumber`
- `MessageSetNumber`

In addition you can use the `GetErrorMsgParam` method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>TextToDecode</i>	Specify the text that is to be decoded, as a string.
<i>&DecodedText</i>	Specify a string variable, used to hold the decoded text.

Returns

A Boolean value: true if successful, false otherwise.

Related Topics

- [DecodeWord method: MCFMailUtil class](#)
- [EncodeText method: MCFMailUtil class](#)
- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

DecodeWord method: MCFMailUtil class

Syntax

```
DecodeWord(WordToDecode, &DecodedWord)
```

Description

Use the `DecodeWord` method to decode a word. If you want to decode a string, use the `DecodeText` method instead.

The word is decoded based on the values used with the `EncodeWord` method.

The decoded word is placed in the *&DecodedWord* parameter.

This method returns true if successful. If the return value is false, the following MCFMailUtil properties are set accordingly:

- `ErrorDescription`
- `ErrorDetails`
- `ErrorMsgParamsCount`
- `MessageNumber`
- `MessageSetNumber`

In addition you can use the `GetErrorMsgParam` method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>WordToDecode</i>	Specify the word that is to be decoded, as a string.
<i>&DecodedWord</i>	Specify a string variable, used to hold the decoded word.

Returns

A Boolean value: true if successful, false otherwise.

Related Topics

- [DecodeText method: MCFMailUtil class](#)
- [EncodeWord method: MCFMailUtil class](#)
- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

EncodeText method: MCFMailUtil class

Syntax

```
EncodeText(TextToEncode, charset, EncodingStyle, &EncodedText)
```

Description

Use the `EncodeText` method to encode text. If you only want to encode a single word, use the `EncodeWord` method instead.

The encoded text is placed in the *&EncodedText* parameter.

This method returns true if successful. If the return value is false, the following `MCFMailUtil` properties are set accordingly:

- `ErrorDescription`
- `ErrorDetails`
- `ErrorMsgParamsCount`

- `MessageNumber`
- `MessageSetNumber`

In addition you can use the `GetErrorMsgParam` method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>TextToEncode</i>	Specify the text that is to be encoded, as a string.
<i>charset</i>	Specify the character set to be used for encoding the text, as a string. See Global Technology: Character Sets Across the Tiers of the PeopleSoft Architecture.
<i>EncodingStyle</i>	Specify the encoding style. Valid values are: • B — for Base64 encoding. • Q — for "Quoted-Printable" content-transfer-encoding.
<i>&EncodedText</i>	Specify a string variable used to hold the encoded text.

Returns

A Boolean value: true if successful, false otherwise.

Using Encoding Styles

You can specify either "B" or "Q" for the *EncodingStyle* parameter, indicating either Base64 or "Quoted-Printable" content-transfer-encoding, respectively.

Oracle recommends using the "Q" encoding when most of the characters to be encoded are in the ASCII character set; otherwise, you should use the "B" encoding. However, a mail reader that claims to recognize encoded text must be able to accept either encoding for any character set that it supports.

Both Base64 and "Quoted-Printable" content-transfer-encoding are defined by RFC 1521. See RFC 1521: [Base64 Content-Transfer-Encoding](#) and [Quoted-Printable Content-Transfer-Encoding](#).

Related Topics

- [DecodeText method: MCFMailUtil class](#)
- [EncodeWord method: MCFMailUtil class](#)
- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

EncodeWord method: MCFMailUtil class

Syntax

```
EncodeWord(WordToEncode, charset, EncodingStyle, &EncodedWord)
```

Description

Use the EncodeWord method to encode a word. If you want to encode more than a single word, use the EncodeText method.

The encoded word is placed in the *&EncodedWord* parameter.

This method returns true if successful. If the return value is false, the following MCFMailUtil properties are set accordingly:

- ErrorDescription
- ErrorDetails
- ErrorMsgParamsCount
- MessageNumber
- MessageSetNumber

In addition you can use the GetErrorMsgParam method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>WordToEncode</i>	Specify the word that is to be encoded, as a string.
<i>charset</i>	Specify the character set to be used for encoding the word, as a string. See Global Technology: Character Sets Across the Tiers of the PeopleSoft Architecture.
<i>EncodingStyle</i>	Specify the encoding style. Valid values are: • B — for Base64 encoding. • Q — for "Quoted-Printable" content-transfer-encoding.
<i>&EncodedWord</i>	Specify a string variable, used to hold the encoded word.

Returns

A Boolean value: true if successful, false otherwise.

Using Encoding Styles

You can specify either “B” or “Q” for the *EncodingStyle* parameter, indicating either Base64 or “Quoted-Printable” content-transfer-encoding, respectively.

PeopleSoft recommends using the “Q” encoding when most of the characters to be encoded are in the ASCII character set; otherwise, you should use the “B” encoding. However, a mail

reader that claims to recognize encoded text must be able to accept either encoding for any character set that it supports.

Both Base64 and "Quoted-Printable" content-transfer-encoding are defined by RFC 1521. See RFC 1521: [Base64 Content-Transfer-Encoding](#) and [Quoted-Printable Content-Transfer-Encoding](#).

Related Topics

- [DecodeWord method: MCFMailUtil class](#)
- [EncodeText method: MCFMailUtil class](#)
- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

GetErrorMsgParam method: MCFMailUtil class

Syntax

```
GetErrorMsgParam(&index)
```

Description

Use this method to return each of the substitution strings used in the error message.

Parameters

Parameter	Description
<i>&index</i>	Specifies which substitution string to return from the array of substitution parameters.

Returns

A string containing the substitution parameter.

Example

```
Local PT_MCF_MAIL:MCFMailUtil &emailutil = create PT_MCF_MAIL:MCFMailUtil();
For &index = 1 To &emailutil.ErrorMsgParamsCount
    Local String &trace = "Param" | &index | ": " |
    &emailutil.GetErrorMsgParam⇒
    (&index) | "";
End-For;
```

Related Topics

- [ErrorMsgParamsCount property: MCFMailUtil class](#)

IsDomainNameValid method: MCFMailUtil class

Syntax

```
IsDomainNameValid(domainname)
```

Description

Use this method to check whether a domain name is valid. The `isDomainNameValid` method queries your DNS server to check whether the domain name is listed in an "MX", or mailbox exchange, record. Please note that not all domains are properly listed by DNS servers.

Note

The number of retries for domain validation is set by the `SMTPDNSTimeoutRetries` parameter in `psappsrv.cfg`. The default number of retries is 1.

This method returns true if successful. If the return value is false, the following `MCFMailUtil` properties are set accordingly:

- `ErrorDescription`
- `ErrorDetails`
- `ErrorMsgParamsCount`
- `MessageNumber`
- `MessageSetNumber`

In addition you can use the `GetErrorMsgParam` method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>domainname</i>	Specifies the domain name to be validated, as a string.

Returns

A Boolean value: true if the domain name is valid, false otherwise.

Example

```
Local PT_MCF_MAIL:MCFMailUtil &emailutil = create PT_MCF_MAIL:MCFMailUtil();  
&result = &emailutil.IsDomainNameValid("oracle.com");
```

Related Topics

- System and Server Administration: `SMTPDNSTimeoutRetries`
- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)

- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

IsEmailServerAvailable method: MCFMailUtil class

Syntax

```
IsEmailServerAvailable(server, port, user, password)
```

Description

Use the IsEmailServerAvailable method to check if the email server specified with the SMTP settings in the application server configuration file is available.

This method returns true if successful. If the return value is false, the following MCFMailUtil properties are set accordingly:

- ErrorDescription
- ErrorDetails
- ErrorMsgParamsCount
- MessageNumber
- MessageSetNumber

In addition you can use the GetErrorMsgParam method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>server</i>	Specify the name of the mail server handling the specified user account, as a string.
<i>port</i>	Specify the port of the mail server handling the specified user account, as an integer.
<i>user</i>	Specify the user name on the mail server, such as “support” or “john_doe”, as a string.
<i>password</i>	Specify the password associated with the specified user name, as a string.

Returns

A Boolean value: true if the server is available, false otherwise.

Related Topics

- [GetErrorMsgParam method: MCFMailUtil class](#)
- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

ParseRichTextHtml method: MCFMailUtil class

Syntax

```
ParseRichTextHtml(richtext)
```

Description

Use this method to split rich text content with images into an array of MCFBodyPart objects. Typically, this method is used with rich text produced by the rich text editor on a long edit box.

The first element in the array is the text of the email message. The remaining elements in the array represent each image in the message. The images are added as inline parts of the email, rather than as attachments, preserving the original formatting of the HTML content.

Prior to sending the email, the images are stored in a temporary directory. The default directory is *PS_SERVDIR/images*. Use the MCFMailUtil class *imagesLocation* property to specify a different directory location. Images in this temporary directory must be deleted manually after sending the email; these image files are not deleted automatically.

Parameters

Parameter	Description
<i>richtext</i>	Rich text with images that needs to be parsed.

Returns

An array of MCFBodyPart objects.

Example

See the example on creating an email from rich text editor output later in this topic.

Related Topics

- [MCFBodyPart Class](#)
Use the MCFBodyPart class to send email with attachments, HTML, or other non-standard text information.
- [imagesLocation property: MCFMailUtil class](#)
- [Creating an Email from Rich Text Editor Output](#)
The following example creates an email message using output from a long edit box enabled with the rich text editor. Using the ParseRichTextHtml method, rich text output of the long edit box is split into an array of MCFBodyPart objects.

ValidateAddress method: MCFMailUtil class

Syntax

```
ValidateAddress(addresslist)
```

In which *addresslist* is a list of email addresses in the form:

```
email_address1 [{,|;} email_address2] ...
```

Description

Use the `ValidateAddress` method to validate a comma- or semicolon-separated list of email addresses. This method checks the syntax of the email address. It does not verify the domain name or the validity of the user name.

This method returns true if successful. If the return value is false, the following `MCFMailUtil` properties are set accordingly:

- `badaddresses`
- `ErrorDescription`
- `ErrorDetails`
- `ErrorMsgParamsCount`
- `MessageNumber`
- `MessageSetNumber`

In addition you can use the `GetErrMsgParam` method to return each of the substitution strings used to format the error message.

Parameters

Parameter	Description
<i>addresslist</i>	Specify the email address (or addresses) you want to verify as a comma- or semicolon-separated list.

Returns

A Boolean value: true if the specified email addresses are valid, false otherwise. When `ValidateAddress` returns false, the `badaddresses` property will contain an array of all invalid addresses.

Example

```
import PT_MCF_MAIL:*;  
  
Local PT_MCF_MAIL:MCFMailUtil &emailutil = create PT_MCF_MAIL:MCFMailUtil();  
Local boolean &result = &emailutil.ValidateAddress(&email.Recipients);  
Local array of string &bAddresses = &emailutil.badaddresses;  
  
If (&result = False) Then  
    If (&bAddresses <> Null) Then  
        &i = 0;  
        While &bAddresses.Next(&i)  
            Warning ("Bad email address in input = " | &bAddresses [&i]);  
        End-While;  
    End-If;  
End-If;
```

Related Topics

- [GetErrMsgParam method: MCFMailUtil class](#)
- [badaddresses property: MCFMailUtil class](#)

- [ErrorDescription property: MCFMailUtil class](#)
- [ErrorDetails property: MCFMailUtil class](#)
- [MessageNumber property: MCFMailUtil class](#)
- [MessageSetNumber property: MCFMailUtil class](#)

MCFMailUtil Class Properties

In this section we discuss the MCFMailUtil class properties. The properties are described in alphabetical order.

badaddresses property: MCFMailUtil class

Description

When the ValidateAddress method returns false, use the badaddresses property to get an array of invalid email addresses.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [ValidateAddress method: MCFMailUtil class](#)

ErrorDescription property: MCFMailUtil class

Description

If an error occurs, use the ErrorDescription property to get the description of the error.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [ErrorDetails property: MCFMailUtil class](#)

ErrorDetails property: MCFMailUtil class

Description

If an error occurs, use the ErrorDetails property to get the details for the error.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [ErrorDescription property: MCFMailUtil class](#)

ErrorMsgParamsCount property: MCFMailUtil class

Description

Use this property to return the number of substitution parameters as an integer.

This property is read-only.

Related Topics

- [GetErrMsgParam method: MCFMailUtil class](#)

imagesLocation property: MCFMailUtil class

Description

Use this property to specify a string representing a temporary directory for image storage to be used by the ParseRichTextHtml method. Images in this temporary directory must be deleted manually after sending the email; these image files are not deleted automatically.

If this property is not specified, the default image directory is *PS_SERVDIR/images*.

This property is read/write.

Related Topics

- [ParseRichTextHtml method: MCFMailUtil class](#)
- [Creating an Email from Rich Text Editor Output](#)

The following example creates an email message using output from a long edit box enabled with the rich text editor. Using the ParseRichTextHtml method, rich text output of the long edit box is split into an array of MCFBodyPart objects.

MessageNumber property: MCFMailUtil class

Description

This property returns the message number of the error message associated with the failed mail utility method. The message number is associated with messages in the PeopleTools message catalog.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [MessageSetNumber property: MCFMailUtil class](#)

MessageSetNumber property: MCFMailUtil class

Description

This property returns the message set number of the error message associated with the failed mail utility method. The message set number is associated with messages in the PeopleTools message catalog.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [MessageNumber property: MCFMailUtil class](#)

MCFMultiPart Class

Use the MCFMultiPart class to create complex emails with attachments, HTML content, and so on.

MCFMultiPart Class Methods

In this section, we discuss the MCFMultiPart class methods. The methods are described in alphabetical order.

AddBodyPart method: MCFMultiPart class

Syntax

```
AddBodyPart(&bodyPart)
```

Description

Use the AddBodyPart method to add the specified body part to this multipart email.

Parameters

Parameter	Description
<i>&bodyPart</i>	Specify an already instantiated MCFBodyPart object.

Returns

None.

GetBodyPart method: MCFMultiPart class

Syntax

```
GetBodyPart(Index)
```

Description

Use the GetBodyPart method to return a reference to the body part specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the body part you want to access.

Returns

A reference to an MCFBodyPart object.

Related Topics

- [MCFBodyPart Class Methods](#)
In the following, we discuss the MCFBodyPart class methods. The methods are described in alphabetical order.

GetContentType method: MCFMultiPart class

Syntax

```
GetContentType()
```

Description

Use the GetContentType method to determine the content type.

Parameters

None.

Returns

A string.

GetCount method: MCFMultiPart class

Syntax

```
GetCount()
```

Description

Use the GetCount method to return the number of parts in the MCFMultiPart object.

Parameters

None.

Returns

A number.

MCFMultiPart Class Property

In this section we discuss the MCFMultiPart class property.

SubType property: MCFMultiPart class

Description

Use this property to specify the subtype of the MCFMultiPart object. The values are:

- alternative
- related
- mixed

The default value is mixed.

This property is read/write.

MCFOutboundEmail Class

This class inherits many properties from the MCFEmail class, which in turn inherits many properties from the MCFPart class. Generally, you use only the subclasses, MCFOutboundEmail and MCFInboundEmail, and not the superclasses.

MCFOutboundEmail Class Methods

In this section, we discuss the MCFOutboundEmail class methods. The methods are discussed in alphabetical order.

AddAttachment method: MCFEmail class

Syntax

```
AddAttachment({FilePath | FileURL}, FilePathType, FileName, FileDescr,  
OverrideContentType, OverrideCharset)
```

Description

Use the AddAttachment method to add an attachment to this email.

Use the *FilePathType* parameter to specify if the file path is relative or absolute. If it's an absolute path, the file path could be a file on the local machine, a network folder, or a fully-qualified URL.

You can also add an attachment by creating a multipart object, adding the attachments as bodyparts to the multipart object, and then setting the MultiPart property of the MCFOutboundEmail object. The AddAttachment method is provided for convenience.

Parameters

Parameter	Description
<i>FilePath FileURL</i>	You can either specify the file path to the file, or a URL to the file. Depending on the <i>FilePathType</i> parameter, you may specify either a relative or absolute file path to the file. This parameter should include the file name and extension of the file. If you specify a URL address where the file is located, it must be an absolute URL. This URL should include the actual name of the file. If you specify a URL address, you must specify the <i>FilePathType</i> parameter as %FilePath_Absolute.
<i>FilePathType</i>	Specify the path type for the file, whether it is an absolute or relative path. The values are: • %FilePath_Absolute — the file path is an absolute path. • %FilePath_Relative — the file path is a relative path.
<i>FileName</i>	Specify the name of the file that you want to attach, as a string. You must include the file extension as well.
<i>Description</i>	Specify a description of the file.

Parameter	Description
<i>OverrideContentType</i>	The system detects the content type of the attachment using the file location and name. Specifying <i>OverrideContentType</i> overrides the system detected content type. The character set can also be included in the ContentType. For example, "text/plain; charset=US-ASCII"
<i>OverrideCharset</i>	Specify a character set to be used to override the existing character set.

Returns

None.

AddHeader method: MCFEmail class

Syntax

AddHeader(*HeaderName*, *HeaderValue*)

Description

Use the AddHeader method to add a header to the email. This method allows for email server customizations. Some commonly used headers are already exposed as properties, such as From, To, Subject, ContentType and ContentLanguage. Advanced applications can adapt this technique to meet their own requirements. These headers can be either standard SMTP headers or custom headers starting with "X-".

Parameters

Parameter	Description
<i>HeaderName</i>	Specify the name of the header that you want to add. This parameter takes a string value.
<i>HeaderValue</i>	Specify the actual text of the header, as a string.

Returns

None.

Example

```
Local PT_MCF_MAIL:MCFOutboundEmail &email = create
PT_MCF_MAIL:MCFOutboundEmail⇒
();
Local string &TestName = "Custom Header";
&email.From = &def.From;
&email.Recipients = &def.Recipients;
&email.SMTPServer = &def.SMTPServer;
&email.Subject = &TestName;
&email.Text = &TestName;
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP2");
```

```
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP3");  
&email.AddHeader("X-Mailer", "CRM Sales Application 8.9 SP4");  
&res = &email.Send();
```

Related Topics

- [GetHeader method: MCFEmail class](#)
- [GetHeaderCount method: MCFEmail class](#)
- [GetHeaderName method: MCFEmail class](#)
- [GetHeaderNames method: MCFEmail class](#)
- [GetHeaderValues method: MCFEmail class](#)

AddImportedAttachment method: MCFEmail class

Syntax

```
AddImportedAttachment(&emailID, &emailPartID)
```

Description

Use the AddImportedAttachment method to add a new attachment email part to an email, from an existing email attachment that has already been imported into the system. The attachment is identified by the email ID and email part ID passed into the method.

Parameters

Parameter	Description
<i>&emailID</i>	Specify the email ID to identify the attachment to be added to an email. This parameter takes an integer value.
<i>&emailPartID</i>	Specify the email part ID to identify the attachment to be added to an email. This parameter takes an integer value.

Returns

None.

Example

```
Local PT_MCF_MAIL:MCFOutboundEmail &email = create  
PT_MCF_MAIL:MCFOutboundEmail();  
  
&email.From = &From;  
&email.Recipients = &Recipients;  
&email.Subject = &Subject;  
  
Local PT_MCF_MAIL:MCFBodyPart &text = create PT_MCF_MAIL:MCFBodyPart();  
&text.Text = "Hello";  
  
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();  
&mp.AddBodyPart(&text);
```

```
&email.MultiPart = &mp;  
  
&email.AddImportedAttachment(&emailID, &emailPartNum);  
  
&res = &email.Send();
```

GetErrorMsgParam method: MCFEmail class

Syntax

```
GetErrorMsgParam(&index)
```

Description

Use this method to return each of the substitution strings used in the error message.

Parameters

Parameter	Description
<i>&index</i>	Specifies which substitution string to return from the array of substitution parameters.

Returns

A string containing the substitution parameter.

Example

```
Local PT_MCF_MAIL:MCFOutboundEmail &email = create  
PT_MCF_MAIL:MCFOutboundEmail();  
For &index = 1 To &email.ErrorMsgParamsCount  
    Local String &trace = "Param" | &index | ": " | &email.GetErrorMsgParam(  
&index) | "";  
End-For;
```

Related Topics

- [ErrorMsgParamsCount property: MCFMailUtil class](#)

GetHeader method: MCFEmail class

Syntax

```
GetHeader(HeaderName)
```

Description

Use the GetHeader method to return the value of the specified header.

Parameters

Parameter	Description
<i>HeaderName</i>	Specify the name of the header that you want to access the values for, as a string. The matching of header names is case insensitive.

Returns

An array of string containing the header values. If the header is not present, returns an array of length zero.

Related Topics

- [Understanding Arrays](#)
An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.
- [AddHeader method: MCFEmail class](#)
- [GetHeaderCount method: MCFEmail class](#)
- [GetHeaderName method: MCFEmail class](#)
- [GetHeaderNames method: MCFEmail class](#)
- [GetHeaderValues method: MCFEmail class](#)

GetHeaderCount method: MCFEmail class

Syntax

```
GetHeaderCount()
```

Description

Use the GetHeaderCount method to return the number of headers.

Parameters

None.

Returns

An integer, representing the number of headers present.

Related Topics

- [AddHeader method: MCFEmail class](#)
- [GetHeader method: MCFEmail class](#)
- [GetHeaderName method: MCFEmail class](#)
- [GetHeaderNames method: MCFEmail class](#)

- [GetHeaderValues method: MCFEmail class](#)

GetHeaderName method: MCFEmail class

Syntax

GetHeaderName(*Index*)

Description

Use the GetHeaderName to return the name of the header that is located at *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the header you want to access.

Returns

A string.

Related Topics

- [AddHeader method: MCFEmail class](#)
- [GetHeader method: MCFEmail class](#)
- [GetHeaderCount method: MCFEmail class](#)
- [GetHeaderNames method: MCFEmail class](#)
- [GetHeaderValues method: MCFEmail class](#)

GetHeaderNames method: MCFEmail class

Syntax

GetHeaderNames()

Description

Use the GetHeaderNames method to return an array containing the names of all the headers.

Parameters

None.

Returns

An array of string.

Related Topics

- [AddHeader method: MCFEmail class](#)
- [GetHeader method: MCFEmail class](#)
- [GetHeaderCount method: MCFEmail class](#)

- [GetHeaderName method: MCFEmail class](#)
- [GetHeaderValues method: MCFEmail class](#)

GetHeaderValues method: MCFEmail class

Syntax

GetHeaderValues(*Index*)

Description

Use the GetHeaderValues method to return the value for the header located at the position specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the header whose value you want to access.

Returns

An array of string.

Related Topics

- [AddHeader method: MCFEmail class](#)
- [GetHeader method: MCFEmail class](#)
- [GetHeaderCount method: MCFEmail class](#)
- [GetHeaderName method: MCFEmail class](#)
- [GetHeaderNames method: MCFEmail class](#)

Send method: MCFEmail class

Syntax

Send()

Description

Use the Send method to send the email.

When you call the Send method, the following properties might be set based on the type of error:

- InvalidAddresses
- MessageNumber (from the PeopleTools Message Catalog)
- MessageSetNumber (from the PeopleTools Message Catalog)
- ValidSentAddresses
- ValidUnsentAddresses

In addition, a list of substitution strings for the error message can be accessed by the `ErrorMsgParamsCount` property and the `GetErrMsgParam` method.

Parameters

None.

Returns

A number indicating the status of the send. Values are:

Numeric Value	Constant Value	Description
0	<code>%ObEmail_FailedBeforeSending</code>	Email failed before being sent.
1	<code>%ObEmail_Delivered</code>	Email was delivered.
2	<code>%ObEmail_NotDelivered</code>	Email delivery not attempted.
3	<code>%ObEmail_PartiallyDelivered</code>	Email has only been partially delivered. Only some of the addresses in the list of addresses were delivered to.
-1	<code>%ObEmail_SentButResultUnknown</code>	Email was sent but whether it was successful or not is not known.

Related Topics

- [InvalidAddresses property: MCFOutboundEmail class](#)
- [ValidSentAddresses property: MCFOutboundEmail class](#)
- [ValidUnsentAddresses property: MCFOutboundEmail class](#)
- [MessageNumber property: MCFOutboundEmail class](#)
- [MessageSetNumber property: MCFOutboundEmail class](#)

SetSMTPParam method: MCFEmail class

Syntax

```
SetSMTPParam(ParamName, ParamValue)
```

Description

Use the `SetSMTPParam` method to set parameters for the SMTP session to be used for sending the email. If you are only sending out one email, use this method. If you are sending many emails, use the `SMTPSession` class and set the parameters once for all the emails you are sending out.

Note

You should use this method before you use the `Send` method.

Note

This method is only applicable to SMTP-based outbound email. You should not use this method for HTTPS email.

Parameters

Parameter	Description
<i>ParamName</i>	Specify the name of the parameter you want to overwrite.
<i>ParamValue</i>	Specify the value for the named parameter that you want used instead of the existing value.

Returns

None.

Example

```
&email.setSMTPParam("mail.mime.decodetext.strict", "false");  
&email.setSMTPParam("mail.mime.address.strict", "false");  
&email.setSMTPParam("mail.debug", "true");
```

Related Topics

- [SMTPSession Class](#)
Use the SMTPSession class to when you want to send more than one email using the same SMTP session. If you are only sending a single email, use the MCFOutboundEmail class instead.

MCFOutboundEmail Class Properties

In this section we discuss the MCFOutboundEmail class properties. The properties are described in alphabetical order.

BackupSMTPPort property: MCFOutboundEmail class

Description

Use this property to specify the port number of the backup SMTP server. This is an optional property when creating an email. If you don't specify a value, the default value is 25.

This property is read/write.

BackupSMTPServer property: MCFOutboundEmail class

Description

Use this property to specify the server name of the backup SMTP server. The system tries to connect to the backup server if the primary SMTPserver is not available.

This property is read/write.

BackupSMTPSSLClientCertAlias property: MCFOutboundEmail class

Description

Use this property to specify the alias for the certificate for Secure Sockets Layer (SSL) client authentication on the backup SMTP server.

This property is read/write.

Related Topics

- [BackupSMTPSSLPort property: MCFOutboundEmail class](#)
- [BackupSMTPUseSSL property: MCFOutboundEmail class](#)

BackupSMTPSSLPort property: MCFOutboundEmail class

Description

Use this property to specify the SSL port number for the backup SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 465.

This property is read/write.

Related Topics

- [BackupSMTPSSLClientCertAlias property: MCFOutboundEmail class](#)
- [BackupSMTPUseSSL property: MCFOutboundEmail class](#)

BackupSMTPUserName property: MCFOutboundEmail class

Description

Use this property to specify the user name used to sign onto the backup SMTP server. This user name is used for authentication when sending mail using the backup mail server.

This property is read/write.

BackupSMTPUserPassword property: MCFOutboundEmail class

Description

Use this property to specify the user password used for signing onto the backup SMTP server. The BackupSMTPUserName and password are used for the authentication when sending mail using the backup mail server.

This property is read/write.

BackupSMTPUseSSL property: MCFOutboundEmail class

Description

Use this property to indicate whether the connection to the backup SMTP server will be attempted using SSL or not.

This property takes a Boolean value: true if an SSL connection is to be attempted, false if a non-SSL connection is to be attempted.

This property is read/write.

Related Topics

- [BackupSMTPSSLClientCertAlias property: MCFOutboundEmail class](#)
- [BackupSMTPSSLPort property: MCFOutboundEmail class](#)

BCC property: MCFOutboundEmail class

Description

Use this property to specify a comma- or semicolon-separated list of addresses that are sent a copy of this email. These blind carbon copy recipients won't appear on the list of recipients.

This property is read/write.

Related Topics

- [CC property: MCFOutboundEmail class](#)

BounceTo property: MCFOutboundEmail class

Description

Use this property to specify the email address the system should direct all bounced mail to.

This property is read/write.

CC property: MCFOutboundEmail class

Description

Use this property to specify a comma- or semicolon-separated list of addresses that are sent a copy (carbon copy) of this message.

This property is read/write.

Related Topics

- [BCC property: MCFOutboundEmail class](#)

Charset property: MCFOutboundEmail class

Description

Use this property to specify the character set for the text or the attachment.

You can also specify this property using the `SetAttachmentContent` method, or the `ContentType` property.

This property is read/write.

Related Topics

- [SetAttachmentContent method: MCFBodyPart class](#)
- [ContentType property: MCFOutboundEmail class](#)

ContentLanguage property: MCFOutboundEmail class

Description

Use this property to set the language of this email. More than one language can be set in a comma-separated list. Use the standard abbreviated language names, such as en, fr, de, da, and so on.

You can also include the country codes when you specify the language, such as en-us.

This property is read/write.

Related Topics

- [ISO 3166 Codes \(Countries\)](#)
- [ISO 639 Language Codes \(Obsolete\)](#)

ContentType property: MCFOutboundEmail class

Description

Use this property to specify the content type of this body part.

You can also specify the content type with the `SetAttachmentContent` method.

You can also use this property to specify the character set. For example, "text/plain; charset=US-ASCII".

This property is read/write.

Related Topics

- [SetAttachmentContent method: MCFBodyPart class](#)
- [Charset property: MCFOutboundEmail class](#)

DefaultCharSet property: MCFOutboundEmail class

Description

Use this property to specify the character set to be applied to all the parts of the email.

This property is read/write.

Description property: MCFOutboundEmail class

Description

Use this property to specify a description of the file attachment associated with this email. If there is no file attachment, this property is ignored.

This property is read/write.

Related Topics

- [AddAttachment method: MCFEmail class](#)

Disposition property: MCFOutboundEmail class

Description

Use this property to specify how the body part is presented in the received mail.

Some email clients ignore the setting of this property and present body parts either inline or as file attachments.

Values for this property are:

Value	Description
Attachment	The body part is shown as a file attachment.
Inline	The body part is shown in the body itself.

This property is read/write.

ErrorDescription property: MCFOutboundEmail class

Description

If an error occurs, use the ErrorDescription property to get the description of the error.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [ErrorDetails property: MCFOutboundEmail class](#)

ErrorDetails property: MCFOutboundEmail class

Description

If an error occurs, use the ErrorDetails property to get the details of the error.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [ErrorDescription property: MCFOutboundEmail class](#)

ErrorMsgParamsCount property: MCFOutboundEmail class

Description

Use this property to the number of substitution parameters as an integer.

This property is read-only.

Related Topics

- [GetErrorMsgParam method: MCFEmail class](#)

Filename property: MCFOutboundEmail class

Description

If you are adding an attachment to the email, you can specify the name of the file using this property.

PeopleSoft recommends that you keep the file extension specified with this property the same as the original extension found in the file path, otherwise the client applications may not be able to display it properly.

This property is read/write.

FilePath property: MCFOutboundEmail class

Description

Specify the path for the file that contains the contents of this email.

Whether this is a relative or absolute path depends on the FilePathType property.

You can also specify a URL to the file using this property, if the FilePathType property is specified as %FilePath_Absolute.

If you specify a value for this property, the 'Text' content is ignored (when used with the ContentType property.)

This property is read/write.

Related Topics

- [FilePathType property: MCFOutboundEmail class](#)

FilePathType property: MCFOutboundEmail class

Description

Use this property to specify whether the path specified with the FilePath property is a relative or absolute path. The values for this property are:

Value	Description
%FilePath_Relative	The file path specified with the FilePath property is a relative path.
%FilePath_Absolute	The file path specified with the FilePath property is either an absolute path to a file, or a URL to a file.

If you specify a relative path, the file must be available in the FILES folder of application server folder.

If you specify an absolute path, the file could be on the local machine, in any network folder, or a URL.

If you specify a value for this property, the Text property is ignored.

This property is read/write.

From property: MCFOutboundEmail class

Description

Use this property to specify the email address of the person sending the email.

You can specify more than one address as from in a comma-separated list.

This property is read/write.

Related Topics

- [Recipients property: MCFOutboundEmail class](#)
- [ReplyTo property: MCFOutboundEmail class](#)
- [Sender property: MCFOutboundEmail class](#)

Importance property: MCFOutboundEmail class

Description

Use this property to specify the value of the importance header field.

The importance can be set to the following:

- low
- normal
- high

If the Priority property is not set, the system automatically sets it to the corresponding values like 5, 3 and 1.

This property is read/write.

InvalidAddresses property: MCFOutboundEmail class

Description

Use this property to get a partial list of email addresses to which the email could not be sent. The email addresses are in a string, separated by commas.

This property is read-only.

Related Topics

- [ValidSentAddresses property: MCFOutboundEmail class](#)
- [ValidUnsentAddresses property: MCFOutboundEmail class](#)

IsAuthenticationReqd property: MCFOutboundEmail class

Description

Use this property to specify if authentication is required or not. If the SMTP server does not support authentication or authentication is not enabled, this property is ignored.

This property takes a Boolean value: true if authentication is required, false otherwise.

This property is read/write.

IsOkToSendPartial property: MCFOutboundEmail class

Description

Use this property to specify if the email can be sent to only some of the specified recipients or if it must be sent to all. This property takes a Boolean value: true if a partial list of addresses is acceptable, false otherwise. If the email must go out to all those listed, or to none at all, specify false.

This property is read/write.

Considerations Using IsOkToSendPartial

If the syntax of the email address is wrong, no mail is sent, regardless of the value of this property. The error is reported.

If the syntax of the email addresses is correct but the email server is unable to send mail to some addresses, the value of this property is used to either send or not send to the partial list of email addresses.

If the syntax of all the email addresses are correct and the email server is able to dispatch mail to all the addresses, no error is reported immediately. Later, if some addresses are found invalid by the recipient email server or gateway, the mail is sent back. In this case the source email server has no way to find the invalidity of the email address in advance.

IsReturnReceiptReqd property: MCFOutboundEmail class

Description

Use this property to specify if the receiver must send acknowledgement that the email was received when it's received. This property takes a Boolean value: true if the return receipt is required, false otherwise.

This property is read/write.

MessageNumber property: MCFOutboundEmail class

Description

This property returns the message number of the error message associated with this email. The message number is associated with messages in the PeopleTools Message Catalog.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [MessageSetNumber property: MCFOutboundEmail class](#)

MessageSetNumber property: MCFOutboundEmail class

Description

This property returns the message set number of the error message associated with the email.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner. If this property has a user-specified value, that value will be overwritten automatically when there is an error condition.

Related Topics

- [MessageNumber property: MCFOutboundEmail class](#)

MultiPart property: MCFOutboundEmail class

Description

The email can contain simple text, one attachment, or a MultiPart object.

If you have assigned a MultiPart object using this property, the text and attachment related properties are ignored.

This property is read/write.

Example

```
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
&mp.SubType = "alternative; differences=Content-type";
&mp.AddBodyPart(&text);
&mp.AddBodyPart(&html);
&email.MultiPart = &mp;
```

Priority property: MCFOutboundEmail class

Description

Use this property to specify the priority of this email.

The values are:

1. Highest Priority
2. High Priority
3. Normal
4. Low Priority
5. Lowest Priority

The default value is 3, that is, normal priority.

This value set with this property is used to set to a header X-Priority field, as this is the most common but non-standard field to show priority. In addition, the corresponding values are set in two header fields: X-MSMail-Priority and Priority. The headers X-Priority or X-MSMail-Priority are set to the corresponding value only if the user does not specify a value.

This property is read/write.

Recipients property: MCFOutboundEmail class

Description

Use this property to specify the email addresses of all the main recipients to whom the email is being sent. All the addresses are specified in a comma- or semicolon-separated string.

This property is read/write.

RefIDs property: MCFOutboundEmail class

Description

Use this property to specify a value for the REFERENCES header field of the message.

This property is read/write.

ReplyIDs property: MCFOutboundEmail class

Description

Use this property to specify a value for the IN-REPLY-TO header field of the message.

This property is read/write.

ReplyTo property: MCFOutboundEmail class

Description

Use this property to specify the email address where the reply should be sent. You do not need to specify a value for this property if the value is the same as the From property.

This property is read/write.

Related Topics

- [From property: MCFOutboundEmail class](#)

ResultOfSend property: MCFOutboundEmail class

Description

This property returns the result of the Send method. The values are:

Numeric Value	Constant Value	Description
0	%ObEmail_FailedBeforeSending	Email failed before being sent.
1	%ObEmail_Delivered	Email was delivered.
2	%ObEmail_NotDelivered	Email delivery not attempted.
3	%ObEmail_PartiallyDelivered	Email has only been partially delivered. Only some of the addresses in the list of addresses were delivered to.
-1	%ObEmail_SentButResultUnknown	Email was sent but whether it was successful or not is not known.

This property is read-only.

Related Topics

- [Send method: MCFEmail class](#)

Sender property: MCFOutboundEmail class

Description

Use this property to specify the address of the author of the message. You do not need to specify a value for this property if the value for the From property is the same.

This property is read/write.

Related Topics

- [From property: MCFOutboundEmail class](#)

Sensitivity property: MCFOutboundEmail class

Description

Use this property to specify the value of the sensitivity header field.

The values are:

- personal
- private
- company-confidential

This property is read/write.

SMTPPort property: MCFOutboundEmail class

Description

Use this property to specify the port number of SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 25.

This property is read/write.

SMTPServer property: MCFOutboundEmail class

Description

Use this property to specify the SMTP server to be used when sending this email.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPUserName property: MCFOutboundEmail class](#)
- [SMTPUserPassword property: MCFOutboundEmail class](#)
- [SMTPSession Class](#)

Use the SMTPSession class to when you want to send more than one email using the same SMTP session. If you are only sending a single email, use the MCFOutboundEmail class instead.

SMTPSSLClientCertAlias property: MCFOutboundEmail class

Description

Use this property to specify the alias for the certificate for SSL client authentication on the SMTP server.

This property is read/write.

Related Topics

- [SMTPSSLPort property: MCFOutboundEmail class](#)
- [SMTPUseSSL property: MCFOutboundEmail class](#)
- [Using an SSL Connection to Send Email](#)

The following code example uses an SSL connection to send an email message:

SMTPSSLPort property: MCFOutboundEmail class

Description

Use this property to specify the SSL port number for the SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 465.

This property is read/write.

Related Topics

- [SMTPSSLClientCertAlias property: MCFOutboundEmail class](#)
- [Using an SSL Connection to Send Email](#)

The following code example uses an SSL connection to send an email message:

SMTPUserName property: MCFOutboundEmail class

Description

Use this property to specify the user name to be used for logging into the SMTP server.

You should only use this property if the SMTP server allows authentication. If the SMTP server does not allow authentication, setting this property has no effect.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPServer property: MCFOutboundEmail class](#)
- [SMTPUserPassword property: MCFOutboundEmail class](#)

SMTPUserPassword property: MCFOutboundEmail class

Description

Use this property to specify the password for the SMTP user. This property is used with the SMTPUserName property.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPServer property: MCFOutboundEmail class](#)
- [SMTPUserName property: MCFOutboundEmail class](#)

SMTPUseSSL property: MCFOutboundEmail class

Description

Use this property to indicate whether the connection to the SMTP server will be attempted using SSL or not. If you don't specify a value for this property, the default value is N.

This property takes a Boolean value: true if an SSL connection is to be attempted, false if a non-SSL connection is to be attempted.

This property is read/write.

Related Topics

- [SMTPSSLClientCertAlias property: MCFOutboundEmail class](#)
- [Using an SSL Connection to Send Email](#)

The following code example uses an SSL connection to send an email message:

StatusNotifyOptions property: MCFOutboundEmail class

Description

Use this property to specify when the system should notify the sender. The values are separated by commas in a string. The values are:

Value	Description
SUCCESS	Send notification if the email is delivered successfully.
FAILURE	Send notification if the email is not delivered successfully.
DELAY	Send notification if delivery of the email is delayed.

This property is read/write.

Related Topics

- [StatusNotifyReturn property: MCFOutboundEmail class](#)
- [TimeToWaitForResult property: MCFOutboundEmail class](#)

StatusNotifyReturn property: MCFOutboundEmail class

Description

Use this property to specify what should be returned as the status notification. You can return either the header or the full message. This option is meaningful only if StatusNotifyOptions property is set.

The values are:

Value	Description
HDRS	Return only the headers of the email.
FULL	Return the full email message.

This property is read/write.

Subject property: MCFOutboundEmail class

Description

Use this property to specify the subject of the email. A subject can only contain 254 characters.

This property is read/write.

Text property: MCFOutboundEmail class

Description

Use this property to specify the text for the email.

This property is read/write.

TimeToWaitForResult property: MCFOutboundEmail class

Description

Use this property to specify the number of milliseconds to wait for the result of send email process. If the result comes back within this time, the returned value is a positive number. Otherwise, %ObEmail_SentButResultUnknown (or -1) is returned.

This property is read/write.

Related Topics

- [StatusNotifyOptions property: MCFOutboundEmail class](#)
- [StatusNotifyReturn property: MCFOutboundEmail class](#)

UsedDefaultConfig property: MCFOutboundEmail class

Description

Use this property to determine whether the default configuration as specified in application server configuration file was used or not.

This property returns a Boolean value: true if the default configuration was used, false if the value specified with the MCFOutboundEmail or the SMTPSession object was used.

This property is read-only.

UsedPrimaryServer property: MCFOutboundEmail class

Description

Use this property to determine if the default SMTP server was used, or the backup server.

This property returns a Boolean value: true if the default SMTP server was used, false if the backup server was used.

This property is read-only.

ValidSentAddresses property: MCFOutboundEmail class

Description

This property returns the list of addresses that were valid and that the email was sent to. The email addresses are in a string, separated by commas.

This property is read-only.

Related Topics

- [InvalidAddresses property: MCFOutboundEmail class](#)
- [ValidUnsentAddresses property: MCFOutboundEmail class](#)

ValidUnsentAddresses property: MCFOutboundEmail class

Description

Use this property to get a list of the email addresses that are valid, yet the system was unable to send to, due to system problems. The email addresses are separated by commas.

This property is read-only.

Related Topics

- [InvalidAddresses property: MCFOutboundEmail class](#)
- [ValidSentAddresses property: MCFOutboundEmail class](#)

SMTPSession Class

Use the SMTPSession class to when you want to send more than one email using the same SMTP session. If you are only sending a single email, use the MCFOutboundEmail class instead.

SMTPSession Class Methods

In this section we describe the SMTPSession class methods. The methods are described in alphabetical order.

Send method: SMTPSession class

Syntax

```
Send(&Email)
```

Description

Use the Send method to send an MCFOutboundEmail object as email.

By default, the system sends the email to the SMTP server using the properties set in the application server configuration file. You can specify different setup parameters by supplying values for the SMTPSession object properties, such as Server, BackupServer, and so on.

Parameters

Parameter	Description
<i>&Email</i>	Specify an already instantiated MCFOutboundEmail object to be sent.

Returns

A constant indicating the status of the method. The values are:

Value	Description
%ObEmail_Delivered	The email was delivered.
%ObEmail_NotDelivered	Email delivery not attempted.
%ObEmail_PartiallyDelivered	The email was only partially delivered, that is, it was only delivered to some of the recipients.
%ObEmail_FailedBeforeSending	The email wasn't delivered.
%ObEmail_SentButResultUnknown	The email was sent but the result is unknown. The TimeToWaitForResult value was not sufficient to get the result of the send process.

Related Topics

- [SendAll method: SMTPSession class](#)

SendAll method: SMTPSession class

Syntax

```
SendAll(&Emails)
```

Description

Use the SendAll method to send a number of emails, all using the same SMTP session and session properties.

Parameters

Parameter	Description
<i>&Emails</i>	Specify an array of MCFOutboundEmail objects.

Returns

An array of number. Each item in the array indicates the status of an individual email object. Values are:

Value	Description
%ObEmail_Delivered	The email was delivered.
%ObEmail_NotDelivered	Email delivery not attempted.
%ObEmail_PartiallyDelivered	The email was only partially delivered, that is, it was only delivered to some of the recipients.
%ObEmail_FailedBeforeSending	The email wasn't delivered.
%ObEmail_SentButResultUnknown	The email was sent but the result is unknown. The TimeToWaitForResult value was not sufficient to get the result of the send process.

Related Topics

- [Send method: SMTPSession class](#)

SetSMTPParam method: SMTPSession class

Syntax

```
SetSMTPParam(ParamName, ParamValue)
```

Description

Use the SetSMTPParam method to set additional parameters for the SMTP session.

You must use this method before you use any Send method.

Parameters

Parameter	Description
<i>ParamName</i>	Specify the name of the parameter you want to overwrite.
<i>ParamValue</i>	Specify the value for the named parameter that you want used instead of the existing value.

Returns

None.

SMTPSession Class Properties

In this section we describe the SMTPSession class properties. The properties are described in alphabetical order.

BackupPort property: SMTPSession class

Description

Use this property to specify the port number of backup SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 25.

This property is read/write.

BackupServer property: SMTPSession class

Description

Use this property to specify the name of the backup SMTP server. The system tries connecting to the backup server if the primary SMTP server is not available.

This property is read/write.

BackupSSLClientCertAlias property: SMTPSession class

Description

Use this property to specify the alias for the certificate for SSL client authentication on the backup SMTP server.

This property is read/write.

Related Topics

- [BackupSSLPort property: SMTPSession class](#)
- [BackupUseSSL property: SMTPSession class](#)

BackupSSLPort property: SMTPSession class

Description

Use this property to specify the SSL port number for the backup SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 465.

This property is read/write.

Related Topics

- [BackupSSLClientCertAlias property: SMTPSession class](#)
- [BackupUseSSL property: SMTPSession class](#)

BackupUserName property: SMTPSession class

Description

Use this property to specify the user name used to sign onto the backup SMTP server.

This user name is used for authentication when sending mail using the backup mail server.

This property is read/write.

BackupUserPassword property: SMTPSession class

Description

Use this property to specify the user password used to sign onto the backup SMTP server.

This user name and password are used for authentication when sending mail using the backup mail server.

This property is read/write.

BackupUseSSL property: SMTPSession class

Description

Use this property to indicate whether the connection to the backup SMTP server will be attempted using SSL or not.

This property takes a Boolean value: true if an SSL connection is to be attempted, false if a non-SSL connection is to be attempted.

This property is read/write.

Related Topics

- [BackupSSLClientCertAlias property: SMTPSession class](#)
- [BackupSSLPort property: SMTPSession class](#)

IsAuthenticationReqd property: SMTPSession class

Description

Use this property to specify if authentication is required or not. If the SMTP server does not support authentication or authentication is not enabled, this property is ignored.

This property takes a Boolean value: true if authentication is required, false otherwise.

This property is read/write.

Port property: SMTPSession class

Description

Use this property to specify the SMTP port number to be used for sending this email. This property takes a numeric value. This property is optional. If you don't specify a value for this property, the default value of 25 is used.

This property is read/write.

Related Topics

- [SMTPServer property: MCFOutboundEmail class](#)
- [SMTPUserName property: MCFOutboundEmail class](#)
- [SMTPUserPassword property: MCFOutboundEmail class](#)
- [SMTPSession Class](#)

Use the SMTPSession class to when you want to send more than one email using the same SMTP session. If you are only sending a single email, use the MCFOutboundEmail class instead.

Server property: SMTPSession class

Description

Use this property to specify the name of the SMTP server to be used when sending this email.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPUserName property: MCFOutboundEmail class](#)
- [SMTPUserPassword property: MCFOutboundEmail class](#)
- [SMTPSession Class](#)

Use the SMTPSession class to when you want to send more than one email using the same SMTP session. If you are only sending a single email, use the MCFOutboundEmail class instead.

SSLClientCertAlias property: SMTPSession class

Description

Use this property to specify the alias for the certificate for SSL client authentication on the SMTP server.

This property is read/write.

Related Topics

- [SSLPort property: SMTPSession class](#)
- [UseSSL property: SMTPSession class](#)

SSLPort property: SMTPSession class

Description

Use this property to specify the SSL port number for the SMTP server. This is an optional property. If you don't specify a value for this property, the default value is 465.

This property is read/write.

Related Topics

- [SSLClientCertAlias property: SMTPSession class](#)

- [UseSSL property: SMTPSession class](#)

UsedDefaultConfig property: SMTPSession class

Description

Use this property to determine whether the default configuration as specified in application server configuration file was used or not.

This property returns a Boolean value: true if the default configuration was used, false if the value specified with the MCFOutboundEmail or the SMTPSession object was used.

This property is read-only.

UsedPrimaryServer property: SMTPSession class

Description

Use this property to determine if the default SMTP server was used, or the backup server.

This property returns a Boolean value: true if the default SMTP server was used, false if the backup server was used.

This property is read-only.

UserName property: SMTPSession class

Description

Use this property to specify the user name to be used for logging into the SMTP server.

You should only use this property if the SMTP server allows authentication. If the SMTP server does not allow authentication, setting this property has no effect.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPServer property: MCFOutboundEmail class](#)
- [SMTPUserPassword property: MCFOutboundEmail class](#)

UserPassword property: SMTPSession class

Description

Use this property to specify the password for the SMTP user. This property is used with the SMTPUserName property.

This property is read/write.

Related Topics

- [SMTPPort property: MCFOutboundEmail class](#)
- [SMTPServer property: MCFOutboundEmail class](#)
- [SMTPUserName property: MCFOutboundEmail class](#)

UseSSL property: SMTPSession class

Description

Use this property to indicate whether the connection to the SMTP server will be attempted using SSL or not. If you don't specify a value for this property, the default value is N.

This property takes a Boolean value: true if an SSL connection is to be attempted, false if a non-SSL connection is to be attempted.

This property is read/write.

Related Topics

- [SSLClientCertAlias property: SMTPSession class](#)
- [SSLPort property: SMTPSession class](#)

Mail Classes Examples

This section provides examples for creating and authenticating email messages.

Creating a Text Email

The following code example creates and sends a very simple email, then tests the results.

```
import PT_MCF_MAIL:*;

/*-- Create an outbound email object --*/
Local PT_MCF_MAIL:MCFOutboundEmail &Email =
create PT_MCF_MAIL:MCFOutboundEmail();
/*-- Initialize the usual fields of an email --*/
&Email.From = &FromAddress;
&Email.Recipients = &ToList;
&Email.Subject = &Subject;
&Email.Text = &MailBody;
/*-- The send method uses the default SMTP parameters as set in the app
server⇒
configuration file.
```

```
This send method makes a connection to the SMTP server, sends the mail and
then⇒
disconnects.
```

The result are returned as a number corresponding to the possible values.

```
The list of ValidSent, InvalidSent and Invalid addresses are returned in the
email⇒
object itself
----*/
Local integer &resp = &Email.Send();
Local boolean &done;
Evaluate &resp
    When %ObEmail_Delivered
        /* every thing ok */
```

```

        &done = True;
        Break;
    When %ObEmail_NotDelivered
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
End-Evaluate;

```

Creating Email and Overriding SMTP Settings

The following code example creates a text email and overrides the SMTP settings as found in the application server configuration file.

```

import PT_MCF_MAIL:*;

/*-- Create an email object by setting individual parameters ---*/

Local PT_MCF_MAIL:MCFOutboundEmail &Email =
create PT_MCF_MAIL:MCFOutboundEmail();

&Email.Recipients = &ToList; /* comma separated list of email addresses */
&Email.CC = &CCList; /* comma separated list of email addresses */
&Email.BCC = &BCCList; /* comma separated list of email addresses */
&Email.From = &FromAddress; /* from email address */
&Email.ReplyTo = &ReplyToAddress; /* in case the reply is to be sent to a⇒
different email address */
&Email.Sender = &SenderAddress; /* If different from the "from" address */
&Email.Subject = &Subject; /* email subject line */
&Email.Text = &MailBody; /* email body text */
/*-- Override the default SMTP parameters specified in app server
configuration⇒
file ----*/
&Email.SMTPServer = "psp-smtpg-01";
&Email.SMTPPort = 10266; /*-- Usually this is 25 by default */
Local integer &resp = &Email.Send();
/* Now check the &resp for the result */

Local boolean &done;
Evaluate &resp
    When %ObEmail_Delivered
        /* every thing ok */
        &done = True;
        Break;
    When %ObEmail_NotDelivered

```

```

        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
End-Evaluate;

```

Creating an HTML Email

The following example creates an HTML email.

```

import PT_MCF_MAIL:*;

/*-- Create an email object by setting individual parameters
---*/
Local PT_MCF_MAIL:MCFOutboundEmail &email =
create PT_MCF_MAIL:MCFOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList;
    &email.Subject = &Subject;
&email.Text =
"<html><body><H1><b>Hi there!</b></H1><P>We are ready.</body></html>";

    &email.ContentType = "text/html";
Local integer &res = &email.Send();

Local boolean &done;
Evaluate &resp
    When %ObEmail_Delivered
        /* every thing ok */
        &done = True;
        Break;
    When %ObEmail_NotDelivered
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));

```

```

        Break;
    End-Evaluate;

```

Creating a Multipart Email with Text and HTML Parts

The following code example creates an email with both HTML and text sections.

The email client on the target host must be able to detect the HTML and text parts in the email and display the part that the client is configured to display.

```

import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email =
create PT_MCF_MAIL:MCFOutboundEmail();
Local string &TestName = "Text and its alternate html body";
&email.From = &FromAddress;
&email.Recipients = &ToList;
&email.Subject = &Subject;
Local PT_MCF_MAIL:MCFBodyPart &text = create PT_MCF_MAIL:MCFBodyPart();
&text.Text = "Hi There";
Local PT_MCF_MAIL:MCFBodyPart &html = create PT_MCF_MAIL:MCFBodyPart();
&html.Text =
"<html><BODY><H1>Email test with HTML content</H1><b>Hi There</b>" |
"<A href='http://www.example.com'>Check this out!</A>" |
"<P></BODY></html>";
&html.ContentType = "text/html";
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
&mp.SubType = "alternative; differences=Content-type";
&mp.AddBodyPart(&text);
&mp.AddBodyPart(&html);
&email.MultiPart = &mp;
Local integer &res = &email.Send();

Local boolean &done;
Evaluate &resp
    When %ObEmail_Delivered
        /* every thing ok */
        &done = True;
        Break;
    When %ObEmail_NotDelivered
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeoplesTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeoplesTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
End-Evaluate;

```

Creating an HTML Email with Images

The following code example creates an HTML email with embedded images. The content ID for an image can be a reference to a part in the email. In the following code example, the images become a part of the email and are transmitted as attachments to the email.

```
import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email =
create PT_MCF_MAIL:MCFOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList;
    &email.Subject = &Subject;
Local string &htmlText =
"<html>" |
" <head><title></title></head>" |
" <body>" |
" <b>A sample jpg</b><br>" |
" <IMG SRC=cid:23abc@pc27 width=566 height=424><br>" |
" <b>End of jpg</b>" |
" </body>" |
"</html>";

/* In this sample, the htmlText is assembled using | operator
only for the readability.
Specifying just one string can be more efficient
*/
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
    &mp.SubType = "related";
Local PT_MCF_MAIL:MCFBodyPart &html = create PT_MCF_MAIL:MCFBodyPart();
    &html.Text = &htmlText;
    &html.ContentType = "text/html";
Local PT_MCF_MAIL:MCFBodyPart &image = create PT_MCF_MAIL:MCFBodyPart();
&image.SetAttachmentContent("///file:C:/User/Documentum/XML%20Applications/
proddoc⇒
/peoplebook_upc/peoplebook_upc.dtd",
%FilePath_Absolute, "sample.jpg", "This is a sample image!", "", "");
    &image.AddHeader("Content-ID", "<23abc@pc27>");
    &mp.AddBodyPart(&html);
    &mp.AddBodyPart(&image);
    &email.MultiPart = &mp;
Local integer &res = &email.Send();

Local boolean &done;
Evaluate &resp
    When %ObEmail_Delivered
        /* every thing ok */
        &done = True;
        Break;
    When %ObEmail_NotDelivered
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
```

```

        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
End-Evaluate;

```

Creating an Email from Rich Text Editor Output

The following example creates an email message using output from a long edit box enabled with the rich text editor. Using the ParseRichTextHtml method, rich text output of the long edit box is split into an array of MCFBodyPart objects.

```

import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email = create
PT_MCF_MAIL:MCFOutboundEmail();
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
Local PT_MCF_MAIL:MCFMailUtil &mu = create PT_MCF_MAIL:MCFMailUtil();

Local string &htmlText = RECORD_NAME.FIELD_NAME.Value;

&mp.SubType = "related";
&email.Recipients = &recipients;
&email.From = &from;
&email.Subject = "Your Order";

Local array of PT_MCF_MAIL:MCFBodyPart &bp;
&mu.imagesLocation = "c:\temp\images";
&bp = &mu.ParseRichTextHtml(&htmlText);

If (&bp = Null) Then
    MessageBox(0, "", 0, 0, &mu.ErrorDescription);
    Return;
End-If;

&mp.AddBodyPart(&bp [1]);

For &i = 2 To &bp.Len
    &mp.AddBodyPart(&bp [&i]);
End-For;

&email.MultiPart = &mp;
Local integer &resp = &email.Send();


/* Exec code to check the &resp for the result */

/* Exec code to delete temporary image files from the imagesLocation
directory */

```

For example, the rich text editor is used to create a message containing text and two images as shown in this example:

This example illustrates the fields and controls on the Rich text editor displaying an example email. You can find definitions for the fields and controls later on this page.

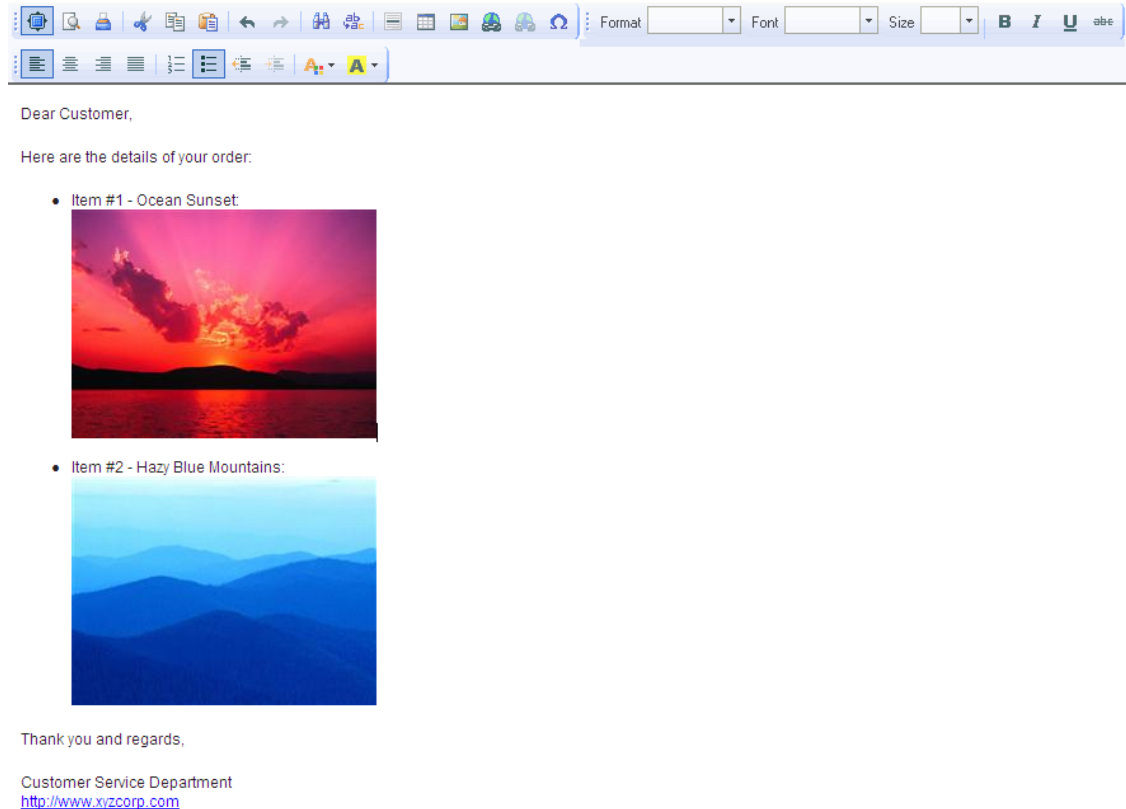

The HTML for this email is as follows:

```
<p>Dear Customer,</p>
<p>Here are the details of your order:</p>
<ul>
<li> Item #1 - Ocean Sunset:
<br /> <br /> &nbsp;</li>
<li> Item #2 - Hazy Blue Mountains:
<br /> </li>
</ul>
<p>Thank you and regards,</p>
<p>Customer Service Department
<br /><a href="http://www.xyzcorp.com">http://www.xyzcorp.com</a></p>
```


When this HTML is parsed by the ParseRichTextHtml method, an array with three MCFBodyPart elements is created. The first MCFBodyPart is array element &bp [1] with the following properties:

- &bp [1].ContentType =

text/html
- &bp [1].Text =


```
<p>Dear Customer,</p>
<p>Here are the details of your order:</p>
<ul>
<li> Item #1 - Ocean Sunset:
<br /> 
<br /> &nbsp;  </li>
<li> Item #2 - Hazy Blue Mountains:
<br /> </li>
</ul>
<p>Thank you and regards,</p>
<p>Customer Service Department
<br /><a href="http://www.xyzcorp.com">http://www.xyzcorp.com</a></p>
```

The second MCFBodyPart is array element &bp [2] with the following properties:

- &bp [2].ContentType =

image/gif
- &bp [2].Description =

Image1
- &bp [2].Disposition =

inline
- &bp [2].AttachmentURL =

c:\temp\images\20091111142435187Sunset_thumbnail.jpg

The final MCFBodyPart is array element &bp [3] with the following properties:

- &bp [3].ContentType =

image/gif
- &bp [3].Description =

Image2


- &bp [3].Disposition =

inline
- &bp [3].AttachmentURL =

c:\temp\images/20091111142508395Mountains_thumbnail.jpg

Observe that the email received by the recipient is formatted the way that it appeared in the rich text editor as shown in the following example:

This example illustrates the fields and controls on the Email as received in Microsoft Outlook. You can find definitions for the fields and controls later on this page.

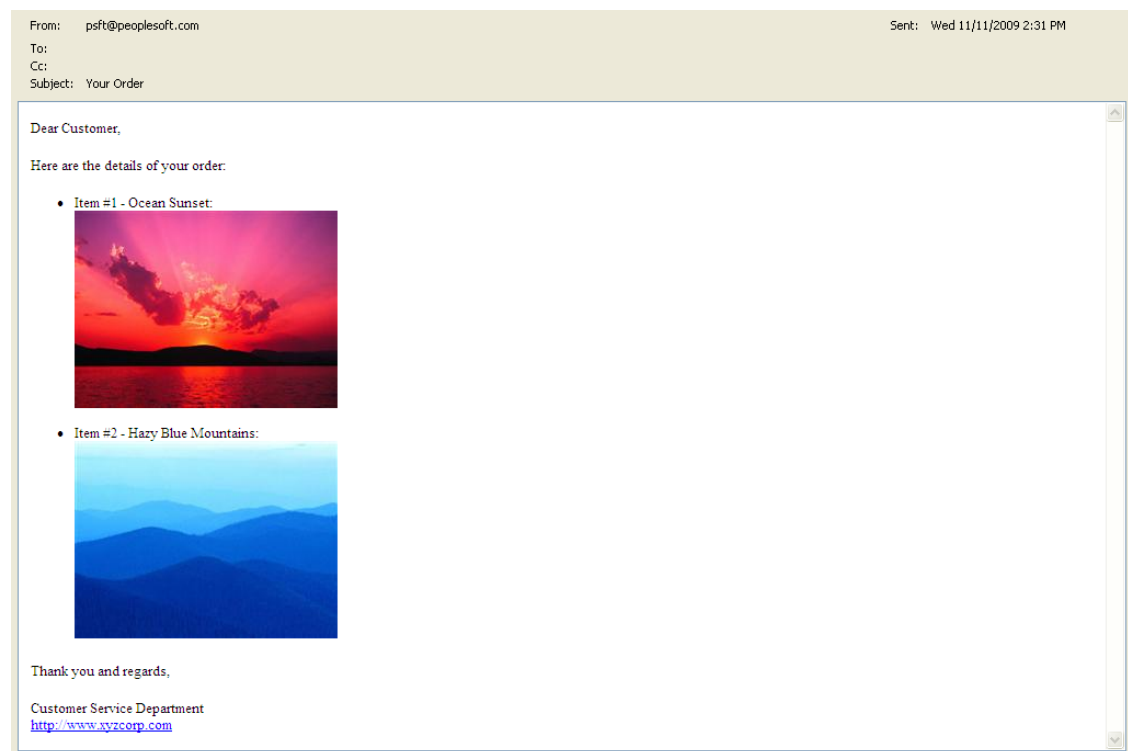

Finally, the XML code that represents this email message is as follows:

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<SOAP-ENV:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:⇒
cms="http://cms.ocs.oracle/" xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/⇒
envelope/" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <SOAP-ENV:Body>
    <cms:GetEntitySnapshotResponse>
      <return xsi:type="EmailMessageType_DEBUG"
SnapshotId="000000000000000010⇒
00009E2607E2B4200000124E528DD580000000000000001" CEN="334B:3BF0:emsg:⇒
38893C00F42F38A1E0404498C8A6612B0000FEE32642">
        <CreatedOn>2009-11-11T21:31:07Z</CreatedOn>
        <Creator
EID="334B:3BF0:user:CB3F97695BD24114B65149D2E4CC842E00000000⇒
```

```

112AE"/>
    <Deleted>false</Deleted>
    <ModifiedBy
EID="334B:3BF0:user:CB3F97695BD24114B65149D2E4CC842E00000⇒
000112AE"/>
    <ModifiedOn>2009-11-11T21:31:07Z</ModifiedOn>
    <Name>your order</Name>
    <Parent
EID="334B:3BF0:afrh:38893C00F42F38A1E0404498C8A6612B00001EF9⇒
C00A"/>
    <New>false</New>
    <ReadFlag>true</ReadFlag>
    <UserCreatedOn>2009-11-11T21:31:06Z</UserCreatedOn>
    <Viewer
EID="334B:3BF0:user:CB3F97695BD24114B65149D2E4CC842E000000001⇒
12AE"/>
    <Content>
    <ContentId>24316678.11257950022359.JavaMail.admin@XXXXX</
ContentId>
    <MediaType>message/rfc822</MediaType>
    <Body xsi:type="MultiContentType">
    <MediaType>multipart/related</MediaType>
    <Parts>
    <Item xsi:type="SimpleContentType">
    <MediaType>text/html</MediaType>
    <CharacterEncoding>us-ascii</CharacterEncoding>
    <Language>en</Language>
    <ContentStream>
    <Id>T0RNMU5ESTF0VFPeUmtKQ05FWTJNemhETmpWQ1JqWXdRel⇒
ZDT0VJek9EUXdNREF3TURBd01EWTVRVUU9JCQjIyQkN2JpdCQkIyMkJDg3NyQkIyMkJDU2Mg==</Id
>
    <Length>640</Length>
    </ContentStream>
    </Item>
    <Item xsi:type="SimpleContentType">
    <Disposition>INLINE</Disposition>
    <ContentId>&lt;2205@pc27&gt;</ContentId>
    <MediaType>image/gif</MediaType>
    <CharacterEncoding>ascii</CharacterEncoding>
    <Language>en</Language>
    <ContentStream>

<Id>T0RNMU5ESTF0VFPeUmtKQ05FWTJNemhETmpWQ1JqWXdRelZD⇒
T0VJek9EUXdNREF3TURBd01EWTVRVUU9JCQjIyQkYmFzZTY0JCQjIyQkMTY3NCQkIyMkJDExNzI4</
Id>
    <Length>11923</Length>
    </ContentStream>
    <Name>20091111142435187Sunset_thumbnail.jpg</Name>
    </Item>
    <Item xsi:type="SimpleContentType">
    <Disposition>INLINE</Disposition>
    <ContentId>&lt;8160@pc27&gt;</ContentId>
    <MediaType>image/gif</MediaType>
    <CharacterEncoding>ascii</CharacterEncoding>
    <Language>en</Language>
    <ContentStream>

```

```

<Id>T0RNMU5ESTFOVFpEUmtKQ05FWTJNemhETmpWQ1JqWXdRelZD⇒
T0VJek9EUXdNREF3TURBd01EWTVRVUU9JCQjIyQkYmFzZTY0JCQjIyQkMTM2NDMkJCMjJCQ3MzUy</
Id>
    <Length>7553</Length>
  </ContentStream>
  <Name>20091111142508395Mountains_thumbnail.jpg</Name>
</Item>
</Parts>
</Body>
<From>
  <Address>&lt;psft@example.com&gt;</Address>
</From>
<Priority>NONE</Priority>
<Sender>
  <Address>&lt;psft@example.com&gt;</Address>
</Sender>
<SentDate>2009-11-11T21:31:06Z</SentDate>
<Size>21039</Size>
<Subject>Your Order</Subject>
<TOReceivers>
  <Item>
    <Address>&lt;&gt;</Address>
    <Participant
EID="334B:3BF0:user:CB3F97695BD24114B65149D2E4⇒
CC842E0000000112AE"/>
    <Directives/>
    <Status>DELIVERED</Status>
  </Item>
</TOReceivers>
</Content>
<DeliveredTime>
  <DateOnly>>false</DateOnly>
  <FloatingTime>>false</FloatingTime>
  <Timestamp>2009-11-11T21:31:07Z</Timestamp>
</DeliveredTime>
<Modifiable>>false</Modifiable>
<ReceiptRequested>>false</ReceiptRequested>
<Type>EMAIL</Type>
<MimeHeaders>
  <Item>
    <Name>X-AUTH-TYPE</Name>
    <Value>SW50ZXJuYWwgSVA=</Value>
  </Item>
  <Item>
    <Name>Received</Name>
    <Value>ZnJvbSBY221pbmV0MTMub3JhY2xLLmNvbSAoLzE00C44Ny4xM⇒
TMuMTI1KSBieSBkZWZhdWx0IChPcmFjbGUGQmVlaGl2ZSBHYXRld2F5IHY0LjApIHdpdGggRVNN⇒
VFAgOyBXZWQsIDExIE5vdiAyMDA5IDEzOjMxOjA2IC0wODAw</Value>
  </Item>
  <Item>
    <Name>Received</Name>
    <Value>ZnJvbSBVCVUZGWSAoYnVmZnkudXMub3JhY2xLLmNvbSBbMTAuMTM4L⇒
jIyOC4xMzNdKSBieSBY221pbmV0MTMub3JhY2xLLmNvbSAoU3dpdGNoLTmuMy4xL1N3aXRjaC0⇒
zLjMuMSkgd2l0aCBFU01UUCBpZCBuQUJMVjZVSjAxMzk0NiBmb3IgpGRhdmUucGllcmNlQG9yYWNSZ

```

```

=>
S5jb20+0yBXZWQsIDExIE5vdiAyMDA5IDIx0jMx0jA2IEdNVA==</Value>
    </Item>
    <Item>
        <Name>MIME-Version</Name>
        <Value>MS4w</Value>
    </Item>
    <Item>
        <Name>To</Name>
        <Value>ZGF2ZS5waWVyY2VAb3JhY2xLLmNvbQ==</Value>
    </Item>
    <Item>
        <Name>MESSAGE-ID</Name>
        <Value>PDI0MzE2Njc4LjExMjU3OTUwMDIyMzU5LkphdmFNYWlsLmFkb=>
wluQEJVRkZZPg==</Value>
    </Item>
    <Item>
        <Name>Content-Type</Name>

<Value>bXVsdGlvYXJ0L3JlbGF0ZWQ7ICBib3VuZGFyeT0iLS0tLT1fUGFyd=>
F8xXzIzNzUyMTguMTI1Nzk1MDAyMjEwOSI=</Value>
    </Item>
    <Item>
        <Name>From</Name>
        <Value>cHNmdEBwZW9wbGVzb2Z0LmNvbQ==</Value>
    </Item>
    <Item>
        <Name>X-SOURCE-IP</Name>
        <Value>YnVmZnkudXMub3JhY2xLLmNvbSBbMTAuMTM4LjIyOC4xMzNd</
Value>
    </Item>
    <Item>
        <Name>X-CT-REFID</Name>

<Value>c3RyPTAwMDEuMEEwOTAyMDQuNEFGQjJEMTkuMDBGQSxzcz0xLGZncz=>
0w</Value>
    </Item>
    <Item>
        <Name>Subject</Name>
        <Value>WW91ciBPcmRlcg==</Value>
    </Item>
    <Item>
        <Name>Date</Name>
        <Value>V2VkLCAxMSB0b3YgMjAwOSYMT0ZMT0wNiBHTVQ=</Value>
    </Item>
</MimeHeaders>
</return>
</cms:GetEntitySnapshotResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

Creating an Email with Attachments

The following code example creates an email with two attachments.

Oracle recommends that you always provide the proper extension in the file name, otherwise the receiving email client may not be able to associate it with the appropriate application.

① Note

There is no automatic restriction of attachment size using the mail classes. To restrict an email based on attachment size, your application must check the size of an attachment before composing and sending the email.

```
import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email =
create PT_MCF_MAIL:MCFOutboundEmail();
&email.From = &FromAddress;
&email.Recipients = &ToList;
&email.Subject = &Subject;
Local string &plain_text = "Hi there!";
Local PT_MCF_MAIL:MCFBodyPart &text = create PT_MCF_MAIL:MCFBodyPart();
&text.Text = &plain_text;

Local PT_MCF_MAIL:MCFBodyPart &attach1 = create PT_MCF_MAIL:MCFBodyPart();
&attach1.SetAttachmentContent("Ocean Wave.jpg", %FilePath_Relative,
"Ocean Wave.jpg", "Ocean Wave", "", "");
/* %FilePath_Relative indicates the file is available at Appserver's FILES⇒
dierctory */
Local PT_MCF_MAIL:MCFBodyPart &attach2 = create PT_MCF_MAIL:MCFBodyPart();
&attach2.SetAttachmentContent("///file:C:/User/Documentum/XML%20Applications⇒
/proddoc/peoplebook_upc/peoplebook_upc.dtd",
%FilePath_Absolute, "Sample.jpg", "Sample", "", "");
/* The Sample.jpg is available in the "public" folder of my-server machine*/
Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();
&mp.AddBodyPart(&text);
&mp.AddBodyPart(&attach1);
&mp.AddBodyPart(&attach2);
&email.MultiPart = &mp;
Local integer &res = &email.Send();

Local boolean &done;
Evaluate &resp
  When %ObEmail_Delivered
    /* every thing ok */
    &done = True;
    Break;
  When %ObEmail_NotDelivered
    &done = False;
    MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
    Break;
  When %ObEmail_PartiallyDelivered
    &done = True;
    Break;
  When %ObEmail_FailedBeforeSending
```

```

        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
End-Evaluate;

```

Creating Email Attachments by Specifying URLs

The following code example creates two email attachments by specifying a URL for each file location instead of an absolute or relative path to the file.

```

import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email = create
PT_MCF_MAIL:MCFOutboundEmail();

&email.From = &FromAddress;
&email.Recipients = &ToList;
&email.Subject = &Subject;

Local string &plain_text = "Hi there!";
Local PT_MCF_MAIL:MCFBodyPart &text = create PT_MCF_MAIL:MCFBodyPart();

&text.Text = &plain_text;

Local PT_MCF_MAIL:MCFBodyPart &attach1 = create PT_MCF_MAIL:MCFBodyPart();
&attach1.SetAttachmentContent("http://example.com/index.htm",
%FilePath_Absolute, "example.html", "An Example", "", "");

Local PT_MCF_MAIL:MCFBodyPart &attach2 = create PT_MCF_MAIL:MCFBodyPart();
&attach2.SetAttachmentContent("ftp://www.w3c/docs/somedoc.htm",
%FilePath_Absolute, "somedoc.htm", "somedoc from w3c", "", "");

Local PT_MCF_MAIL:MCFMultipart &mp = create PT_MCF_MAIL:MCFMultipart();

&mp.AddBodyPart(&text);
&mp.AddBodyPart(&attach1);
&mp.AddBodyPart(&attach2);

&email.MultiPart = &mp;

Local integer &res = &email.Send();
Local boolean &done;

Evaluate &resp
  When %ObEmail_Delivered
    /* every thing ok */
    &done = True;
    Break;
  When %ObEmail_NotDelivered
    &done = False;
    MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));

```

```

        Break;
    When %ObEmail_PartiallyDelivered
        &done = True;
        Break;
    When %ObEmail_FailedBeforeSending
        &done = False;
        MessageBox(0, "", &email.MessageSetNumber, &email.MessageNumber,
"PeopleTools error not found", &email.GetErrorMsgParam(1),
&email.GetErrorMsgParam(2));
        Break;
    End-Evaluate;

```

Creating and Sending Multiple Email Messages

You can create several emails and send them all in a single connection to the SMTP server. However, your system administrator may also need to configure the SMTP server with longer connection time-outs if you are sending multiple emails.

```

import PT_MCF_MAIL:*;

/*-- Create an email object by setting individual parameters
---*/
Local array of PT_MCF_MAIL:MCFOutboundEmail &mails;
Local PT_MCF_MAIL:MCFOutboundEmail &email;
Local PT_MCF_MAIL:SMTPSession &commonSession =
create PT_MCF_MAIL:SMTPSession();
    &email = &commonSession.CreateOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList1;
    &email.Subject = &Subject;
    &email.Text = &MailBody1;
    &mails = CreateArray(&email);
    &email = &commonSession.CreateOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList2;
    &email.Subject = &Subject;
    &email.Text = &MailBody2;
    &mails [2] = &email;
    &email = &commonSession.CreateOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList3;
    &email.Subject = &Subject;
    &email.Text = &MailBody3;
    &mails [3] = &email;
    Local array of integer &allRes = &commonSession.SendAll(&mails);

```

Sending an Email With Authentication

The following code example includes a user name and password to be used by the SMTP server.

```

import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email =

```



```
create PT_MCF_MAIL:MCFOutboundEmail();
    &email.From = &FromAddress;
    &email.Recipients = &ToList;
    &email.Subject = &Subject;
    &email.Text = &MailBody;
    &email.SMTPServer = "MySMTPServer";
    &email.IsAuthenticationReqd = True;
    &email.SMTPUserName = "SomeLoginName";
    &email.SMTPUserPassword = "SomeLoginPassword";

    Local integer &res = &email.Send();
```

Using an SSL Connection to Send Email

The following code example uses an SSL connection to send an email message:

```
import PT_MCF_MAIL:*;

Local PT_MCF_MAIL:MCFOutboundEmail &email = create
PT_MCF_MAIL:MCFOutboundEmail();

&email.From = &FromAddress;
&email.Recipients = &ToList;
&email.Subject = &Subject;
&email.Text = &MailBody;

&email.SMTPServer = "MySMTPServer";
&email.IsAuthenticationReqd = True;

&email.SMTPUserName = "SomeLoginName";
&email.SMTPUserPassword = "SomeLoginPassword";
&email.SMTPUseSSL = "Y";
&email.SMTPSSLClientCertAlias = &cAlias;
&email.SMTPSSLPort = &SSLPort;

Local integer &res = &email.Send();
```

Managed Object Classes

Understanding the Managed Object Classes

PeopleSoft enables users and application developers to generate PeopleTools definitions for managed objects and database objects by providing PeopleCode classes, methods, and properties. Existing field and record definitions cannot be updated through PeopleCode. Therefore, users and application developers must differentiate between the field and record definitions created through the Application Designer and the definitions generated through PeopleCode. Broadly, we'll refer to the Application Designer definitions as design time definitions and the PeopleCode-generated definitions as runtime definitions.

Considerations When Using Definitions Created Through the Managed Object Classes

Important

The classes, methods, properties, and built-in functions are intended for use during configuration time only, before active runtime usage is initiated. Using these classes, methods, properties, and built-in functions during active runtime is not supported. Changes to managed object definitions are not recognized on currently loaded component. In general, changes aren't recognized until the component is reloaded.

Consider the following before you begin using the Managed Object classes, methods, properties, and built-in functions:

Field and Record Definitions

Managed Object classes are FieldDefn, RecordDefn, RecordFieldDefn where FieldDefn objects are the standalone field definitions, and RecordFieldDefn objects are the fields on the records. FieldDefn and RecordDefn objects can be used anywhere in PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on. If you invoke any of the Save methods, you should ensure that it is invoked from an event that allows database updates, such as:

- SavePreChange
- WorkFlow
- SavePostChange
- FieldChange
- Application Engine PeopleCode action

Objects of the Managed Object classes can be declared as component, global, or local variables.

Similar to Application Designer, the Managed Object field and record definition properties are validated when save is invoked to ensure that the properties are used correctly. If validation fails, the detailed error messages are available through the Messages property.

Runtime vs Design Time Definitions

You should not mix the runtime definitions (created through the Managed Object classes) with the design time (created in Application Designer) definitions. For example, you cannot add a runtime field definition to a design time record definition. In order to differentiate the definitions, a read-only property, `RuntimeDefn`, is added to both the field and record managed objects to indicate how the definition was created. *Runtime Definition* is displayed on the Field and Record editors in Application Designer.

The following Application Designer rules apply:

- You cannot add runtime definitions to any design time definition (for example, fields on records, records on components, and so on) with the exception of Projects.
- Runtime definitions are displayed as read-only.
- During an import, runtime definitions cannot overwrite design time definitions.

The following Managed Object classes rules apply:

- Design time definitions can be fetched using the Managed Object classes, but they cannot be saved using the Managed Object classes.
- Design time fields can be added to runtime records.

Consider using a naming convention to distinguish runtime definitions from design time definitions.

Related Languages

The following restrictions apply with regard to related languages when you use the `FieldDefn` and `RecordDefn` classes:

- Class methods for saving related language data of the definitions is not supported. That is, class methods only support saving base language data.
- If a user is signed on in a non-base language, the data entered for related language types of fields will be saved to both the base language table and the related language table. For example, if the base language is English and a user is signed on in Spanish, and they enter a record description in Spanish, that description will be saved to both the base language table and related language table.

Records

The `RecordDefn` class only supports creating SQL views. If a user attempts to save any other type of record, the record is rejected.

Note

Similar to Application Designer record definitions, all record names used with the `RecordDefn` class should not be prefixed with `PS_` although the view that is created is prefixed with `PS_`.

Consider the following ramifications, depending on the database platform, on SQL views:

- Existing views will be dropped before rebuilding them. Dependent views may be dropped or invalidated, but these are not rebuilt automatically. Users and application developers should manage the views and rebuild the dependent views.
- A separate method is provided to build views, that is, views are not built during the save method. It enables users to save their record definitions as frequently as they require and build a view when required.
- The SQL for the view is validated when the view is saved or built. If the SQL is invalid, the view is not built. The RecordDefn class follows the conventions on creating and building views similar to Application Designer.

Message Catalog

The delivered component interface, MESSAGE_CATALOG_CI, can be used to create and delete message catalog entries, but the message catalog entries that can be manipulated are restricted to non-PeopleTools message sets.

Consider the following when you use MESSAGE_CATALOG_CI:

- The structure of the Message Catalog component is such that the message catalog entries are a collection within a given message set.
- Message sets cannot be deleted; only message catalog entries can be deleted.
- The Message Catalog component interface supports the Component Interface Class methods: Cancel, Create, Find, Get, Save.
- The Message Catalog component interface can manipulate non-PeopleTools message sets. PeopleTools message sets (1–999) are *not* allowed to be modified. If you attempt to save one of these, an error is displayed.
- When creating a new message set, the underlying component automatically generates the first message catalog entry, which must be populated before the new message set can be saved.
- When adding or updating a message catalog and the user is signed on in a non-base language, the base language tables and the related language tables are updated with the same text.

Managed Object Classes Built-in Functions

PeopleCode Language Reference: CreateFieldDefn function

PeopleCode Language Reference: CreateRecordDefn function

PeopleCode Language Reference: DeleteFieldDefn function

PeopleCode Language Reference: DeleteRecordDefn function

PeopleCode Language Reference: GetFieldDefn function

PeopleCode Language Reference: GetRecordDefn function

FieldDefn Class

This section provides an overview of the FieldDefn class and discusses:

- FieldDefn class methods.
- FieldDefn class properties.

FieldDefn Class Methods

In this section, the FieldDefn class methods are presented in alphabetical order.

Save method: FieldDefn class

Syntax

Save()

Description

Use the Save method to validate and save a field definition to the database.

Parameters

None.

Returns

An integer representing the following statuses.

Numeric Value	Constant Value	Descriptoin
0	%MDA_Success	The field definition is saved successfully.
1	%MDA_Failed	The field definition is not saved.
2	%MDA_UseAppDesigner	The specified field is not created using the PeopleCode FieldDefn class.
4	%MDA_Unsupported	The specified field type is not supported in PeopleCode.
12	%MDA_InvalidDefn	This value is returned when the validation fails. The detailed validation error messages are available through the Messages property.
14	%MDA_NoWriteAccess	The user doesn't have write permissions to the field.

Example

```
Local FieldDefn &newField = CreateFieldDefn();
If All(&newField) Then
    &newField.Name = "MYNEWFIELD";
    &newField.Type = %FieldType_Char;
    &newField.Description = "My new field";
    &retVal = &newField.SetLabel("MYNEWFIELD", "My field", "My New Field",
True);
    /* do error checking ... */
    Local date &myDate = Date3(1900, 1, 1);
    &retVal = &newField.SetTranslateValue("A", True, &myDate, "My New XLAT",
```

```
"My XLAT");  
    /* do error checking ... */  
    &retVal = &newField.Save();  
    /* do error checking ... */  
End-If;
```

Related Topics

- [SaveAs method: FieldDefn class](#)

SaveAs method: FieldDefn class

Syntax

`SaveAs(New_FieldName)`

Description

Use this method to set the RuntimeDefn flag, validate, and save the field definition to the database.

Labels are copied from the source field to the target field. The translate values are copied if the field type is character (CHAR) and the field length is less than or equal to 4.

Parameters

Parameter	Description
<i>New_FieldName</i>	Specifies the new name of the field.

Returns

An integer representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The field definition is saved successfully.
1	%MDA_Failed	The field definition is not saved.
4	%MDA_Unsupported	The field type is not supported in PeopleCode.
5	%MDA_Duplicate	The given field already exists.
12	%MDA_InvalidDefn	This value is returned when the validation fails. The detailed validation error messages are available through the Messages property.
14	%MDA_NoWriteAccess	The user does not have write permissions to the field.

Example

```
Local FieldDefn &mktField = GetFieldDefn("MARKET");
If All(&mktField) Then
    &mktField.Description = "My new Market field";
    &retVal = &mktField.SetLabel("MYMARKET", "My Market", "My New Market",
True);
    /* do error checking ... */
    Local date &myDate = Date3(1900, 1, 1);
    &retVal = &mktField.SetTranslateValue("A", True, &myDate, "My New Market",
"My Market");
    /* do error checking ... */
    &retVal = &mktField.SaveAs("MYMARKET");
    /* do error checking ... */
End-If;
```

Related Topics

- [Save method: FieldDefn class](#)

SetLabel method: FieldDefn class

Syntax

`SetLabel(Label_ID,Long_name,Short_name,Default_label)`

Description

Use this method to add a new label or modify an existing label. At least one label is required for the field definition to be saved. Also, one label is required to be set as the default label for the field definition to be saved.

Parameters

Parameter	Description
<i>Label_ID</i>	Specifies the label as string.
<i>Long_name</i>	Specifies the long name of the field as string.
<i>Short_name</i>	Specifies the short name of the field as string.
<i>Default_label</i>	Specify a Boolean value whether the label entered in the <i>Label_ID</i> parameter is the default label or not.

Returns

An integer representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The label for the field is updated successfully.
1	%MDA_Failed	The label for the field is not updated.

Example

```
Local FieldDefn &newField = CreateFieldDefn();
If All(&newField) Then
    &newField.Name = "MYNEWFIELD";
    &newField.Type = %FieldType_Char;
    &newField.Description = "My new field";
    &retVal = &newField.SetLabel("MYNEWFIELD", "My field", "My New Field",
True);
    /* do error checking ... */
    &retVal = &newField.Save();
    /* do error checking ... */
End-If;
```

SetTranslateValue method: FieldDefn class

Syntax

SetTranslateValue(*Translate_value*, *Active*, *EffDate*, *Long_name*, *Short_name*)

Description

Use this method to add a new translate value or modify an existing value.

Parameters

Parameter	Description
<i>Translate_value</i>	Specifies the translate value as string.
<i>Active</i>	Specify a Boolean value whether the translate value is active or not.
<i>EffDate</i>	Specifies the effective date.
<i>Long_name</i>	Specifies the long name of the translate value as string
<i>Short_name</i>	Specifies the short name of the translate value as string

Returns

An integer representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The translate values are updated.
1	%MDA_Failed	The translate values are not updated.

Example

```
Local FieldDefn &newField = CreateFieldDefn();
If All(&newField) Then
```



```

        &newField.Name = "MYNEWFIELD";
        &newField.Type = %FieldType_Char;
        &newField.Description = "My new field";
        &retVal = &newField.SetLabel("MYNEWFIELD", "My field", "My New Field",
True);
        /* do error checking ... */
        Local date &myDate = Date3(1900, 1, 1);
        &retVal = &newField.SetTranslateValue("A", True, &myDate, "My New XLAT",
"My XLAT");
        /* do error checking ... */
        &retVal = &newField.Save();
        /* do error checking ... */
End-If;

```

Validate method: FieldDefn class

Syntax

```
Validate()
```

Description

Use this method to validate a field definition.

Parameters

None.

Returns

A Boolean value. True if the field definition is successfully validated; false otherwise. If it returns false, the detailed error messages are available through the Messages property.

Example

```

Local FieldDefn &newField = CreateFieldDefn();
If All(&newField) Then
    &newField.Name = "MYNEWFIELD";
    &newField.Type = %FieldType_Char;
    &newField.Description = "My new field";
    &retVal = &newField.SetLabel("MYNEWFIELD", "My field", "My New Field",
True);
    /* do error checking ... */
    Local date &myDate = Date3(1900, 1, 1);
    &retVal = &newField.SetTranslateValue("A", True, &myDate, "My New XLAT",
"My XLAT");
    /* do error checking ... */
    &retVal = &newField.Validate();
End-If;

```

FieldDefn Class Properties

In this section, the FieldDefn class properties are described in alphabetical order.

DecimalPositions property: FieldDefn class

Description

Use this property to specify the number of digits after the decimal point to be displayed for a field defined as number or signed number. The valid values are 0 to 31.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

DefaultCentury property: FieldDefn class

Description

Use this property to specify the display of century in a field defined as date or date and time.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

Description property: FieldDefn class

Description

Use this property to specify a description for a field.

This property is read/write.

Example

```
&myField.Description = "My new field";
```

Related Topics

- [Name property: FieldDefn class](#)

FormatType property: FieldDefn class

Description

Use this property to specify the formatting of a field. It is valid for character (CHAR) field type.

You can use a value from the pre-defined format types. Value 5 with its associated constant value is desupported, so it is not included in the list.

Numeric Value	Constant Value
0	%FormatFamilyType_Upper
1	%FormatFamilyType_Name
2	%FormatFamilyType_Phone

Numeric Value	Constant Value
3	%FormatFamilyType_Zip
4	%FormatFamilyType_SSN
6	%FormatFamilyType_MixedCase
7	%FormatFamilyType_RawBinary
8	%FormatFamilyType_NumOnly
9	%FormatFamilyType_SIN
10	%FormatFamilyType_PhoneIntl
11	%FormatFamilyType_ZipIntl

Note

Custom format type is not supported.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

IntegerPositions property: FieldDefn class

Description

Use this property to specify the number of digits to be displayed for a field defined as number or signed number. The valid values are 0 to 31.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

Length property: FieldDefn class

Description

Use this property to specify the length of the field of type character (CHAR). The valid values are 1 to 254.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

MaxLength property: FieldDefn class

Description

Use this property to specify the maximum length of a field. It is valid for long character (LONGCHAR) field type. Valid values are 0 to 32767.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

Messages property: FieldDefn class

Description

This property returns a multi-dimensional array of Any that contains the messages that occurred during execution of the Validate or Save methods. This array is only populated after the Validate or Save method has been executed.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

This property is read-only.

Example

```

If Not &fieldDefn.Validate() Then
    Local array of array of any &msgs = &fieldDefn.Messages;
    &default_msg_txt = "";
    &message_set = &msgs [1][1];
    &message_nbr = &msgs [1][2];
    &numParams = &msgs [1][3];
    Evaluate &numParams
    When 0
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt);
    When 1
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt,
&msgs [&index][4]);
    When 2
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt,
&msgs [&index][4], &msgs [&index][5]);
    When 3
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt,
&msgs [&index][4], &msgs [&index][5], &msgs [&index][6]);
    When 4
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt,
&msgs [&index][4], &msgs [&index][5], &msgs [&index][6], &msgs [&index][7]);
    When 5
        &errString = MsgGetText(&message_set, &message_nbr, &default_msg_txt,
&msgs [&index][4], &msgs [&index][5], &msgs [&index][6], &msgs [&index][7],
&msgs [&index][8]);
    When-Other

```

```
        &errString = "Too many parameters - not supported"  
    End-Evaluate;  
    /* do something with &errString */  
End-If;
```

Related Topics

- [Save method: FieldDefn class](#)
- [Validate method: FieldDefn class](#)

Name property: FieldDefn class

Description

Use this property to specify the name of a field as a string value. Changing the name of a field and then saving it is equivalent to the rename operation. All references to the field by other managed objects will be updated as well.

This property is read/write.

Example

```
&myField.Name = "MYFIELD";
```

Related Topics

- [Description property: FieldDefn class](#)

ObjectOwnerId property: FieldDefn class

Description

Use this property to specify a translate value from the OBJECTOWNERID field as a string value.

This property is read/write.

RawBinary property: FieldDefn class

Description

Use this property to set or return a Boolean value representing true (on) or false (off). It is valid for long character (LONGCHAR) field type.

This property is read/write.

Related Topics

- [Type property: FieldDefn class](#)

RuntimeDefn property: FieldDefn class

Description

Use this property to determine whether this field definition was created using the FieldDefn class or not.

This property is read-only.

TimeFormat property: FieldDefn class

Description

Use this property to specify the format in which time should be displayed in a field defined as time or date and time.

You can use the following values:

Numeric Value	Constant Value
0	%TimeFormat_HHMI
1	%TimeFormat_HHMISS
2	%TimeFormat_HHMISS999999

This property is read/write.

Example

```
&myField.TimeFormat = %TimeFormat_HHMI;
```

Type property: FieldDefn class

Description

Use this property to set the type for a field. The values can be one of the following:

Numeric Value	Constant Value
0	%FieldType_Char
1	%FieldType_LongChar
2	%FieldType_Number
3	%FieldType_SignedNumber
4	%FieldType_Date
5	%FieldType_Time
6	%FieldType_DateTime

The following field types are not supported:

- Attachment
- Image
- Image Reference

This property is read/write.

Example

```
&myField.Type = %FieldType_Char;
```

Related Topics

- [DecimalPositions property: FieldDefn class](#)
- [DefaultCentury property: FieldDefn class](#)
- [FormatType property: FieldDefn class](#)
- [IntegerPositions property: FieldDefn class](#)
- [Length property: FieldDefn class](#)
- [MaximumLength property: FieldDefn class](#)
- [RawBinary property: FieldDefn class](#)

RecordDefn Class

This section provides an overview of the RecordDefn class and discusses:

- RecordDefn class methods.
- RecordDefn class properties.

RecordDefn Class Methods

In this section, the RecordDefn class methods are presented in alphabetical order.

AddField method: RecordDefn class

Syntax

AddField(*existing_fieldname*)

Description

Use this method to create a new record field definition for a given field populated with default record field definition values. The new record field is appended to the list of record fields.

Parameters

Parameter	Description
<i>existing_fieldname</i>	Specifies an existing field in the record definition.

Returns

If the field is already on the record, the record field definition for that record field is returned.

Returns a null value if the field definition does not exist in the database.

Example

```
Local RecordDefn &myNewRecord = CreateRecordDefn();
&myNewRecord.Name = "MYRECORD_VW";
&myNewRecord.Description = "My new record";
&myNewRecord.SQL = "SELECT DISTINCT(PROCESS_INSTANCE) FROM PS_MESSAGE_LOG"
```

```
WHERE MESSAGE_NBR = 1018";  
Local RecordFieldDefn &recField = &myNewRecord.AddField("MYFIELD");  
If All(&recField) Then  
    &recField.Key = True;  
End-If;
```

Related Topics

- [GetField method: RecordDefn class](#)
- [RemoveField method: RecordDefn class](#)

AddSubRecord method: RecordDefn class

Syntax

AddSubRecord(*existing_subrecordname*, *sequence_number*)

Description

Use this method to add the given subrecord to a record definition. If the record definition already contains the subrecord, it returns the %MDA_Duplicate error status and does not create a duplicate subrecord.

Parameters

Parameter	Description
<i>existing_subrecordname</i>	Specifies an existing subrecord.
<i>sequence_number</i>	Specify where to insert the subrecord within the list of fields and subrecords on the record definition. Specify 0 to insert it at the beginning. If not specified, by default, the subrecord is appended to the list of fields and subrecords on the record definition at the end.

Returns

A Boolean value representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The subrecord is added successfully.
5	%MDA_Duplicate	The given subrecord is already in the record.
12	%MDA_InvalidDefn	The subrecord does not exist in the database.
1	%MDA_Failed	The subrecord is not added due to an internal error.

Example

```
Local RecordDefn &myRecord = GetRecordDefn("MYRECORD_VW");  
&retVal = &myRecord.AddSubRecord("ADDRESS_SBR");
```

Build method: RecordDefn class

Syntax

```
Build()
```

Description

This method validates and saves a record definition, drops the view if it exists, and then runs the DDL to create or recreate the view in the database.

Parameters

None.

Returns

A Boolean value representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The record definition is built successfully.
1	%MDA_Failed	The record definition is not built.
4	%MDA_Unsupported	
12	%MDA_InvalidDefn	The SQL text is invalid.
14	%MDA_NoWriteAccess	The user does not have write permissions for the record.

Example

```
Local RecordDefn &myNewRecord = CreateRecordDefn();  
&myNewRecord.Name = "MYRECORD_VW";  
&myNewRecord.Description = "My new record";  
&myNewRecord.SQL = "SELECT DISTINCT(PROCESS_INSTANCE) FROM PS_MESSAGE_LOG  
WHERE MESSAGE_NBR = 1018";  
Local RecordFieldDefn &recField = &myNewRecord.AddField("MYNEWFIELD");  
If All(&recField) Then  
    &recField.Key = True;  
End-If;  
&retVal = &myNewRecord.Save();  
/* do error checking ... */  
&retVal = &myNewRecord.Build();  
/* do error checking ... */
```

Related Topics

- [Save method: RecordDefn class](#)
- [Validate method: RecordDefn class](#)

GetField method: RecordDefn class

Syntax

```
GetField({n | field_name})
```

Description

Use this method to obtain the record field definition of the specified field.

Parameters

Parameter	Description
<i>n</i> <i>field_name</i>	Specifies the field to be retrieved. This method takes the type as Any. The PeopleCode program is terminated if the specified field number does not exist on the record.

Returns

A record field definition object for the specified field.

Returns a null value if the specified field does not exist on the record.

Example

```
Local RecordFieldDefn &recField = &myNewRecord.GetField("MYNEWFIELD");
```

Related Topics

- [AddField method: RecordDefn class](#)
- [RemoveField method: RecordDefn class](#)

RemoveField method: RecordDefn class

Syntax

```
RemoveField({n | field_name})
```

Description

Use this method to remove a field from a record.

Parameters

Parameter	Description
<i>n</i> <i>field_name</i>	Specifies the field to be removed. This method takes the type as Any.

Returns

An integer representing the following statuses.

Numeric Value	Constant	Description
0	%MDA_Success	The field is removed successfully.
1	%MDA_Failed	The field is not removed.

Example

```
&returnValue = &myNewRecord.RemoveField("MYNEWFIELD");
```

Related Topics

- [AddField method: RecordDefn class](#)
- [GetField method: RecordDefn class](#)

RemoveSubRecord method: RecordDefn class

Syntax

```
RemoveSubRecord(subrecordname)
```

Description

Use this method to remove a subrecord from a record definition.

Parameters

Parameter	Description
<i>subrecordname</i>	Specifies a subrecord in the record definition.

Returns

A Boolean value representing the following statuses.

Numeric Value	Constant	Description
0	%MDA_Success	The subrecord is removed successfully.
1	%MDA_Failed	The subrecord is not removed due to an internal error.

Example

```
Local RecordDefn &myRecord = GetRecordDefn("MYRECORD_VW");  
&retVal = &myRecord.RemoveSubRecord("JOB_USA_SBR");
```

Save method: RecordDefn class

Syntax

Save()

Description

Use this method to validate and save a record definition to the database.

Parameters

None.

Returns

A Boolean value representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The record definition is saved successfully.
1	%MDA_Failed	The record definition is not saved.
2	%MDA_UseAppDesigner	The record was not created using the PeopleCode RecordDefn class.
4	%MDA_Unsupported	The record type is not a SQL view.
5	%MDA_Duplicate	The specified record definition already exists.
12	%MDA_InvalidDefn	This value is returned when the validation fails. The detailed validation error messages are available through the Messages property.
14	%MDA_NoWriteAccess	The user does not have write permissions to the record.
15	%MDA_SQLNotSaved	The record is saved, but the SQL is not saved.

Example

```
Local RecordDefn &myRecord = GetRecordDefn("MYRECORD_VW");  
If All(&myRecord) Then  
    &myRecord.Description = "My new record description";  
    &retVal = &myRecord.Save();  
    /* do error checking ... */
```

```
        &retVal = &myNewRecord.Build();  
        /* do error checking ... */  
    End-If;
```

Related Topics

- [Validate method: RecordDefn class](#)

SaveAsView method: RecordDefn class

Syntax

```
SaveAsView(record_name)
```

Description

This method sets the RuntimeDefn flag, changes the record type to View, validates, and saves the record definition to the database.

Parameters

Parameter	Description
<i>record_name</i>	Specifies the new record, which is saved as a view.

Returns

A Boolean value representing the following statuses.

Numeric Value	Constant Value	Description
0	%MDA_Success	The record definition is successfully saved as a view.
1	%MDA_Failed	The record definition is not saved as a view.
5	%MDA_Duplicate	The specified record already exists.
12	%MDA_InvalidDefn	This value is returned when the validation fails. The detailed validation error messages are available through the Messages property.
15	%MDA_SQLNotSaved	The record is saved, but the SQL is not saved.

Example

```
&retVal = &srcRecord.SaveAsView("RT_VIEW");
```

Validate method: RecordDefn class

Syntax

```
Validate()
```

Description

Use this method to validate a record definition.

Parameters

None.

Returns

A Boolean value. True if the record definition is successfully validated; false otherwise. If it returns false, the detailed error messages are available through the Messages property.

Example

```
&retVal = &srcRecord.Validate();
```

Related Topics

- [Save method: RecordDefn class](#)

RecordDefn Class Properties

In this section, the RecordDefn class properties are described in alphabetical order.

BuildSequenceNumber property: RecordDefn class

Description

DataMover and SQR scripts use this property to order the build sequence of dependent views. This property is *not* used by the Build method when building a view.

The default value is 1.

This property is read/write.

Description property: RecordDefn class

Description

Use this property to specify a short description for a record.

This property is read/write.

Example

```
&myNewRecord.Description = "My new record";
```

Related Topics

- [Name property: RecordDefn class](#)

FieldCount property: RecordDefn class

Description

This property returns the total number of fields contained in the record. This value is a number. This property is read-only.

Example

```
WinMessage("This record has this many fields : " | &REC.FieldCount);
```

Messages property: RecordDefn class

Description

This property returns a multi-dimensional array of Any that contains the messages that occurred during execution of the Validate or Save methods. This array is only populated after the Validate or Save method has been executed.

The first dimension contains the message set number. The second dimension contains the message number. The third dimension contains the number of parameters in that message. The subsequent dimensions contain the values for the parameters. The maximum number of possible dimensions is 8.

This property is read-only.

Related Topics

- [Save method: RecordDefn class](#)
- [Validate method: RecordDefn class](#)

Name property: RecordDefn class

Description

Use this property to specify the name of a record as a string value. Changing the name of a record and then saving it is equivalent to the rename operation. All references to the record by other managed objects will be updated as well.

This property is read/write.

Example

```
&myNewRecord.Name = "MYRECORD_VW";
```

Related Topics

- [Description property: RecordDefn class](#)

ObjectOwnerId property: RecordDefn class

Description

Use this property to specify a translate value from the OBJECTOWNERID field as a string value.

This property is read/write.

QuerySecurityRecord property: RecordDefn class

Description

Use this property to set or return a query security record if you want secure access to a record using a security view.

This property is read/write.

Related Topics

- [Application Designer Developer's Guide: Setting Record Properties](#)

RelatedLanguageRecord property: RecordDefn class

Description

This property sets or returns the related language record as a string. The value will be a null string ("") if there is no related language record.

This property is read/write.

Related Topics

- [Application Designer Developer's Guide: Setting Record Properties](#)

RuntimeDefn property: RecordDefn class

Description

Use this property to determine whether this record definition was created using the RecordDefn class or not.

This property is read-only.

SetControlField property: RecordDefn class

Description

Use this property to specify the set control field on the record definition.

This property is read/write.

SQL property: RecordDefn class

Description

Use this property to specify the SQL for a view.

This property is read/write.

Example

```
&myNewRecord.SQL = "SELECT DISTINCT(PROCESS_INSTANCE) FROM PS_MESSAGE_LOG  
WHERE MESSAGE_NBR = 1018";
```

Type property: RecordDefn class

Description

Use this property to set the type for a record. The values can be one of the following. Value 4 with its associated constant value is desupported, so it is not included in the list.

Numeric Value	Constant Value
0	%RecordType_SQLTable
1	%RecordType_SQLView
2	%RecordType_Derived
3	%RecordType_SubRecord
5	%RecordType_DynamicView
6	%RecordType_QueryView
7	%RecordType_TempTable

The default type is %RecordType_SQLView.

Example

```
&myNewRecord.Type = %RecordType_SQLTable;
```

RecordFieldDefn Class

This section provides an overview of the RecordFieldDefn class and discusses:

- RecordFieldDefn class methods.
- RecordFieldDefn class properties.

RecordFieldDefn Class Methods

Note

The RecordFieldDefn class does not provide a Save method. Save must be issued against the RecordDefn object with which the RecordFieldDefn object is associated.

Related Topics

- [Save method: RecordDefn class](#)

RecordFieldDefn Class Properties

In this section, the RecordFieldDefn class properties are described in alphabetical order.

AllowSearchEventsForPromptDialogs property: RecordFieldDefn class

Description

If the AllowSearchEventsForPromptDialogs property is set to True, it enables the SearchSave and SearchInit PeopleCode events on a prompt dialog for a field. The default value is False.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Record Field Properties

AlternateSearchKey property: RecordFieldDefn class

Description

This property is True if this record field is defined as an alternate search key in the associated record definition. The default value is False.

This property is read/write.

Example

```
&recField.AlternateSearchKey = True;
```

DescendingKey property: RecordFieldDefn class

Description

This property is True if this record field is defined as a descending key in the associated record definition. The default value is False.

This property is read/write.

Example

```
&recField.DescendingKey = True;
```

DuplicateOrderKey property: RecordFieldDefn class

Description

This property is True if this record field is defined as a duplicate key in the associated record definition. The default value is False.

This property is read/write.

Example

```
&recField.DuplicateOrderKey = True;
```

Key property: RecordFieldDefn class

Description

This property is True if this record field is defined as a primary key of the associated record definition. The default value is False.

This property is read/write.

Example

```
Local RecordFieldDefn &recField = &myNewRecord.AddField("MYNEWFIELD");  
If All(&recField) Then  
    &recField.Key = True;  
End-If;
```

ListBoxItem property: RecordFieldDefn class

Description

This property is True if this record field is defined as a List Box item of the associated record definition.

The default value is False.

This property is read/write.

Example

```
&recField.ListBoxItem = True;
```

Name property: RecordFieldDefn class

Description

This property returns the name of the record field definition that the field object is based on as a string value.

This property is read-only.

Number property: RecordFieldDefn class

Description

This property returns the number of a record field definition as an integer value.

This property is read-only.

RecordFieldLabelID property: RecordFieldDefn class

Description

Use this property to set the label text (long name or short name) for the record field when it's displayed on a page.

This property is read/write.

Required property: RecordFieldDefn class

Description

This property is True if this field is defined as Required in the associated record definition. The default value is False.

This property is read/write.

Example

```
&recField.Required = True;
```

SearchEdit property: RecordFieldDefn class

Description

If this property is set to True, SearchEdit enables system edits (edits specified in the record field definition) for the field, for the life of the search dialog box. Setting SearchEdit to False disables system edits. In the Add mode search dialog box, the following edits are performed when the end-user selects the Add button. In any other mode, the following edits are performed when the end-user selects the Search button:

- Formatting
- Required Field
- Yes/No Table

- 1/0 Table
- Translate Table
- Prompt Table

SearchEdit does not cause the FieldEdit, FieldChange, or SaveEdit PeopleCode events to fire during the search dialog.

You may use SearchEdit to control access to the system. For example, you can apply this property to the SETID field of a dialog box and require the user to enter a valid SETID before they are able to click OK on the search dialog box.

The default value is False.

This property is read/write.

Example

```
&recField.SearchEdit = True;
```

SearchKey property: RecordFieldDefn class

Description

This property is True if this field is defined as a search key in the associated record definition. The default value is False.

This property is read/write.

Example

```
&recField.SearchKey = True;
```

TableEditPromptTable property: RecordFieldDefn class

Description

Use this property to set or return the name of the existing prompt table (if any) associated with this record field definition. This property returns a string value. This property returns null if no prompt table is associated with the record field definition.

This property is read/write.

TableEditSetControlField property: RecordFieldDefn class

Description

Use this property to specify or return a set control field that overrides the set control field of the record definition specified in the prompt table. If you do not specify a set control field, the default is the set control field of the record definition in the prompt table.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Record Field Properties

TableEditType property: RecordFieldDefn class

Description

Use this property to set or return the table edit type of a record field definition. The values can be one of the following:

Numeric Value	Constant Value
0	%EditTableType_NoEdit
1	%EditTableType_Prompt
2	%EditTableType_YesNo
3	%EditTableType_Translate
4	%EditTableType_OneZero

The default value is %EditTableType_NoEdit.

Note

You use %EditTableType_NoEdit when there is no table edit and also when there is a table edit and its type is PromptTable with No Edit.

Example

```
&recField.TableEditType = %EditTableType_Prompt;
```

Type property: RecordFieldDefn class

Description

This property returns the type of field. The values can be one of the following predefined values:

- %FieldType_Char
- %FieldType_Date
- %FieldType_DateTime
- %FieldType_LongChar
- %FieldType_Number
- %FieldType_SignedNumber
- %FieldType_Time

This property is read-only.

Example

```
&recField.Type = %FieldType_Date;
```

Message Catalog Component Interface

This section provides an overview of the delivered component interface, MESSAGE_CATALOG_CI, and discusses:

- Message Catalog Methods
- Message Catalog Properties.

The delivered component interface, MESSAGE_CATALOG_CI, can be used to create, modify, and delete message catalog entries.

Message Catalog Methods

In this section, the Message Catalog methods are described in alphabetical order.

In addition to the methods listed in this topic, the following Component Interface Class methods can be used — Cancel, Create, Find, Get, Save.

Related Topics

- [Component Interface Class Methods](#)
This section discusses the Component Interface class methods. The methods are discussed in alphabetical order.

AddMessage

Syntax

```
AddMessage(message_text,message_desc,message_severity)
```

Description

Use the AddMessage method to populate a message set with text, description, and message type. All parameters can be blank strings to create an empty message. However, it must be populated before you can save it.

The Save method must be run after AddMessage to save the message.

Parameters

Parameter	Description
<i>message_text</i>	Specifies the text of a message as a string value. The message length can be 100 characters or less.
<i>message_desc</i>	Specifies the description of a message as a string value. No limit on the length of the description.

Parameter	Description
<i>message_severity</i>	Specifies the type of a message as a string value. The following message types are available — Cancel, Error, Message, and Warning. The default message type is Message. If an unrecognized message type is passed in, then the <i>message_severity</i> parameter is set to Message.

Returns

A number value; 0 if the specified message text is longer than 100 characters, otherwise it returns the new message number.

Example

```
Function AddNewMessage()  
    Local ApiObject &MYSESSION;  
    Local ApiObject &MSG_CTLG;  
    &MYSESSION = %Session;  
    &MSG_CTLG = &MYSESSION.GetCompIntfc(CompIntfc.MESSAGE_CATALOG_CI);  
    &MSG_CTLG.MESSAGE_SET_NBR = 31600;  
    &MSG_CTLG.Get();  
    &MYLEVEL1 = &MSG_CTLG.PSMSGCATDEFN;  
    Local string &msgText = "Attempted to insert duplicate rows.";  
    Local number &msgNumber = &MSG_CTLG.AddMessage(&msgText, "", "Error");  
    If &msgNumber = 0 Then  
        MessageBox(0, "", 0, 0, "Failed to create new message");  
        Return;  
    End-If;  
End-Function;
```

DeleteMessage

Syntax

DeleteMessage(*message_num*)

Description

Use the DeleteMessage method to delete a message catalog entry.

Note

You cannot delete a message sets; only message catalog entries can be deleted.

The Save method must be run after DeleteMessage to save the changes.

Parameters

Parameter	Description
<i>message_num</i>	Specifies the number of a message catalog entry to be deleted as a number value.

Returns

A Boolean value; False if the message for the given message number does not exist, True otherwise.

Example

```
Function Delete()  
    Local ApiObject &MYSESSION;  
    Local ApiObject &MSG_CTLG;  
    &MYSESSION = %Session;  
    &MSG_CTLG = &MYSESSION.GetCompIntfc(CompIntfc.MESSAGE_CATALOG_CI);  
    &MSG_CTLG.MESSAGE_SET_NBR = 31600;  
    &MSG_CTLG.Get();  
    &MYLEVEL1 = &MSG_CTLG.PMSGCATDEFN;  
    If Not &MSG_CTLG.DeleteMessage(2) Then  
        MessageBox(0, "", 0, 0, "Invalid message number");  
        Return;  
    End-If;  
End-Function;
```

Message Catalog Properties

In this section, we discuss the message catalog properties. The properties occur in two groups: Message Set and Message Catalog Entry. In each group, the properties are described in alphabetical order.

DESCR (Message Set)

Description

Use this property to set or return a long description of a Message Set. This property takes a string value; ensure that the description is 30 characters or less.

This property is not required when you create a message set.

This property is read/write.

DESCRSHORT (Message Set)

Description

Use this property to set or return the short description of a Message Set. This property takes a string value; ensure that the description is 10 characters or less.

This property is not required when you create a message set.

This property is read/write.

MESSAGE_SET_NBR (Message Set)

Description

Use this property to set or return the number of a Message Set. This property takes a number value.

This property is required when you create a message set.

This property is read/write.

DESCRLONG (Message Catalog Entry)

Description

Use this property to set or return a long description of a Message Catalog entry. This property takes a string value; no limit on length of the message.

This property is not required when you create a message catalog entry.

This property is read/write.

MESSAGE_NBR (Message Catalog Entry)

Description

Use this property to set or return the message catalog entry number. This value is automatically generated at Save time for new entries.

This property is not required when you create a message catalog entry.

This property is read/write.

MESSAGE_SET_NBR (Message Catalog Entry)

Description

Use this property to set or return the number of a Message Set. This property takes a number value. This number is the same as the message set number on the Message Set.

This property is not required when you create a message catalog entry.

This property is read/write.

MESSAGE_TEXT (Message Catalog Entry)

Description

Use this property to set or return the text of the message. This property takes a string value; ensure that the message is 100 characters or less. This message will be a shorter version of the long description of the message catalog entry.

This property is required when you create a message catalog entry.

This property is read/write.

MSG_SEVERITY (Message Catalog Entry)

Description

Use this property to set or return the severity indicator for a message. This property takes a character value. The default value for new message catalog entry is *M* (Message). The values can be one of the following:

Value	Description
W	Warning
M	Message
C	Cancel
E	Error

This property is not required when you create a message catalog entry.

This property is read/write.

MCF IM Classes

MCFIMInfo Class Methods

Note

All methods of the MCFIMInfo class have been desupported and exist for backward compatibility only.

In this section, the MCFIMInfo class methods are presented in alphabetical order.

AddUser method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

CheckAll method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetAdditionalUserInfo method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetErrorImageName method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetOfflineImageName method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetOnlineImageName method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetUnknownImageName method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetLaunchURL method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

GetStatus method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

RemoveUser method: MCFIMInfor class

Note

This method has been desupported and currently exists for backward compatibility only.

MCFIMSingleButton Class Methods

Note

All methods of the MCFIMSingleButton class have been desupported and exist for backward compatibility only.

In this section, the MCFIMSingleButton class methods are presented in alphabetical order.

generateHTML method: MCFIMSingleButton class

Note

This method has been desupported and currently exists for backward compatibility only.

generateJavaScript method: MCFIMSingleButton class

Note

This method has been desupported and currently exists for backward compatibility only.

insertXMPPServerUserData method: MCFIMSingleButton class

Note

This method has been desupported and currently exists for backward compatibility only.

MCFIMSingleButton method: MCFIMSingleButton class

Note

This method has been desupported and currently exists for backward compatibility only.

updateXMPPServerUserData method: MCFIMSingleButton class

Note

This method has been desupported and currently exists for backward compatibility only.

MCFIMSingleButton Class Properties

In this section, the MCFIMSingleButton class properties are presented in alphabetical order.

hideDelay property: MCFIMSingleButton class

Note

This property has been desupported and currently exists for backward compatibility only.

Message Classes

Understanding Message Classes

You can create the following types of messages using PeopleSoft Pure Internet Architecture::

- *Rowset-based* messages, which use record definitions to create a hierarchical structure for the data. These are generally used for data from applications, pages, components, and so on.
- *Nonrowset-based* messages, which do not use record definitions. These messages can have virtually any content or structure.
- *Container* messages, which are messages made up of one or more part messages.

Use the PeopleCode message classes to instantiate message objects based on existing message definitions, as well as to populate the objects with data and manipulate the data. You can also use PeopleCode to publish a message.

Rowset-based messages are built on top of the rowset, row, record, and field classes, so the PeopleCode written to populate or access those types of messages looks similar to PeopleCode written to populate or access the component buffer.

Nonrowset-based messages contain XML data, and can be accessed using the XmlDocument class methods and properties.

Container messages contain parts. Each part is a separate message. A container message can contain either all rowset-based messages, or all nonrowset-based messages.

Related Topics

- Integration Broker: Creating Message Definitions
- PeopleCode Developer's Guide: Understanding Data Buffer Access
- Integration Broker: Introduction to PeopleSoft Integration Broker

Messages, Service Operations and Handlers

Message definitions only define the shape of the data contained in a message. A message definition doesn't contain any other type of information, such as if the message is being used synchronously or if it's a response message.

After you create a message definition, you can use it in or more service operations. The service operation contains all the information about how the message is to be used, the routing, the queue if appropriate, and so on.

At least one handler is defined with every service operation. Handlers define additional programming to be used with processing the message associated with the service operation. The handlers can be thought of as corresponding to pre PeopleSoft 8.48 message events.

The PeopleCode for the various handlers is contained in the Integration Broker application classes.

Integration Broker Application Classes

The Integration Broker application classes house the processing logic for asynchronous and synchronous messages. By implementing the Integration Broker application classes, you can reuse code more easily and access the other benefits of using application classes.

The following application classes are defined for Integration Broker. To access these application classes, in PeopleTools Application Designer, open the PS_PT application package, then open the Integration subpackage.

All of the Integration Broker application classes are defined as interfaces. This means that there is no native implementation of them: you must import them to your program and implement them if you want to use them.

Application Class	Methods Contained in Application Class	Comments
INotificationHandler	OnNotify OnError	This interface is the equivalent of the Subscription event in releases prior to PeopleTools 8.48.
IPrePostNotification	OnPreNotify OnPostNotify OnError	This interface provides pre-processing and post-processing of segmented messages.
IReceiver	OnAckReceive OnError	This interface is the equivalent of the OnAckReceive Message event in releases prior to PeopleTools 8.48.
IRequestHandler	OnRequest OnError	This interface is the equivalent of the OnRequest Message event in releases prior to PeopleTools 8.48.
IRouter	OnRouteSend OnRouteReceive OnError	This interface is the equivalent of the OnRouteSend and OnRouteReceive Message events in releases prior to PeopleTools 8.48.
ISend	OnRequestSend OnError	This interface is the equivalent of the OnSend Message event in releases prior to PeopleTools 8.48.

Data Types of Message Objects

Every message class is its own data type, that is, messages are declared as data type Message, IntBroker objects are declared as type IntBroker, and so on.

The following are the data types of the message classes:

- Message
- IntBroker
- IBInfo
- IBConnectorInfo

Scope of Message Objects

The message objects can only be instantiated from PeopleCode. These objects can be used anywhere you have PeopleCode, that is, in Component Interface PeopleCode, notification PeopleCode, record field PeopleCode, application engine PeopleCode, and so on.

Message Object Population

After you've declared and instantiated your message object, you want to populate it with data. If your data is coming from the component buffers, populating your message is easy.

A message definition can contain a hierarchy of records. A component buffer contains a hierarchy of records. If you want to copy data from a component buffer rowset to a message, the *structure* of the message and the component must be the same. That is, if you have a record at level two in your message and you want that data, you must have the same level zero and level one records in your message as in your component.

For example, suppose your component had the following structure (that is, that PO_INFO and PO_LINE are at the same level, and PO_DETAIL is the child of PO_INFO):

```
PO_HEADER
  PO_LINE
  PO_INFO
    PO_DETAIL
```

To include the information in the PO_DETAIL record, you must have *at least* the following record structure in your message:

```
PO_HEADER
  PO_INFO
    PO_DETAIL
```

Any records that are in the page that aren't in the message (and vice-versa) are ignored.

After you get your message object, you can create a rowset from it. This rowset has the same structure as the message. If the message is empty, the rowset has no data. If the message has data, the rowset is automatically populated.

The following example is the simplest way of populating a message with data. This assumes that the structure of the message is the same as the structure of the page.

```
/* this gets all the data in the Component buffer */

&RS = GetLevel0(); /* this instantiates a message object */

&MSG = CreateMessage(OPERATION.MY_MESSAGE); /* creates a rowset with the same
structure as the message */

&MSG_RS = &MSG.GetRowset(); /* this copies all the data from the page to the
message */

&RS.CopyTo(&MSG_RS); /* this publishes the message */
```

```
%IntBroker.Publish(&MSG_RS);
```

A message rowset is the same as a Component buffer rowset, or any other rowset. It is composed of rows, records, and fields. Suppose you didn't want to get all the data from the Component buffer, but instead wanted to populate just a particular record in your message.

To access a record in a message rowset is the same as accessing a record in a component buffer rowset. You must instantiate the rowset, then specify the row before you can access the record.

The following selects values into a record, then uses the record method CopyFieldTo to copy from the Component buffer record to the message record.

```
Local SQL &LN_SQL;
Local Message &MSG;
Local Rowset &HDR_RS, &LN_RS;
Local Record &LN_REC, &ln_rec_msg;

&MSG = CreateMessage(OPERATION.STOCK_REQUEST);
&HDR_RS = &MSG.GetRowset();
&LN_REC = CreateRecord(Record.DEMAND_INF_INV);

&LN_SQL = CreateSQL("Select * from PS_DEMAND_INF_INV where BUSINESS_UNIT= :1
and⇒
ORDER_NO = :2", &BUSINESS_UNIT, &ORDER_NO);

&J = 1;
While &LN_SQL.Fetch(&LN_REC)

    /* copy data into the Level 1 of &MSG object */
    &LN_RS = &HDR_RS(&I).GetRowset(1);

    If &J > 1 Then
        &LN_RS.InsertRow(&J - 1);
    End-If;

    &ln_rec_msg = &LN_RS.GetRow(&J).GetRecord(Record.DEMAND_INF_INV);
    &LN_REC.CopyFieldsTo(&ln_rec_msg);
    &J = &J + 1;
End-While;
```

This section also discusses items to keep in mind when:

- Populating a rowset from a message.
- Publishing and subscribing to partial records.
- Subscribing to character fields.

Considerations When Populating a Rowset From a Message

Suppose your message had two rowsets, one at level zero, a second at level one. In the message, only the level zero rowset contains any data. When you use GetRowset to create a rowset for the entire message, the rowset at level one will contain an empty row, even if there

isn't any data in it. (This is standard behavior for *all* rowsets.) However, you can use the `IsChanged` property on the record object to determine the status of the data.

The following notification PeopleCode example traverse the rowset. (Notice the use of `ChildCount`, `ActiveRowCount`, and `IsChanged` properties).

'...' is where application specific code would go.

```
&MSG_ROWSET = &MSG.GetRowset();
For &A0 = 1 To &MSG_ROWSET.ActiveRowCount

/*****/
/* Process Level 1 Records */
/*-----*/

    If &MSG_ROWSET(&A0).ChildCount > 0 Then
        For &B1 = 1 To &MSG_ROWSET(&A0).ChildCount

            &LEVEL1_ROWSET = &MSG_ROWSET(&A0).GetRowset(&B1);
            For &A1 = 1 To &LEVEL1_ROWSET.ActiveRowCount
                If &LEVEL1_ROWSET(&A1).GetRecord(1).IsChanged Then
                    . . .

/*****/
/* Process Level 2 Records */
/*-----*/

                    If &LEVEL1_ROWSET(&A1).ChildCount > 0 Then
                        For &B2 = 1 To &LEVEL1_ROWSET(&A1).ChildCount
                            &LEVEL2_ROWSET = &LEVEL1_ROWSET(&A1).GetRowset(&B2);
                            For &A2 = 1 To &LEVEL2_ROWSET.ActiveRowCount
                                If &LEVEL2_ROWSET(&A2).GetRecord(1).IsChanged Then
                                    . . .

/*****/
/* Process Level 3 Records */
/*-----*/

                                If &LEVEL2_ROWSET(&A2).ChildCount > 0 Then
                                    For &B3 = 1 To &LEVEL1_ROWSET(&A2).ChildCount
                                        &LEVEL3_ROWSET = &LEVEL2_ROWSET(&A2).GetRowset(&B3);
                                        For &A3 = 1 To &LEVEL3_ROWSET.ActiveRowCount
                                            If &LEVEL3_ROWSET(&A3).GetRecord(1).IsChanged Then
                                                . . .

                                                End-If; /* A3 - IsChanged */
                                            End-For; /* A3 - Loop */
                                        End-For; /* B3 - Loop */
                                    End-If; /* A2 - ChildCount > 0 */

/*****/
/* End of Process Level 3 Records */
/*****/

                                    End-If; /* A2 - IsChanged */
                                End-For; /* A2 - Loop */
                            End-For; /* B2 - Loop */
                        End-If; /* A1 - ChildCount > 0 */
                    End-For; /* B1 - Loop */
                End-If; /* A0 - ChildCount > 0 */
            End-For; /* A0 - Loop */
        End-If; /* MSG_ROWSET.ActiveRowCount > 0 */
    End-For; /* MSG.ActiveRowCount > 0 */
```

```

        End-If; /* A1 - ChildCount > 0 */

/*-----*/
/* End of Process Level 2 Records */
/*-----*/

        End-If; /* A1 - IsChanged */
        End-For; /* A1 - Loop */
        End-For; /* B1 - Loop */
        End-If; /* A0 - ChildCount > 0 */

/*-----*/
/* End of Process Level 1 Records */
/*-----*/

End-For; /* A0 - Loop */

```

Considerations for Publishing and Subscribing to Partial Records

If you've selected to not publish all the fields in the message, you must be careful when inserting that data into a record.

Deselecting the **Include** check box in the message definition means that the field is *excluded* from the message definition.

- The field won't be included when generating an XML document (when publishing a message.)
- If the field is present in the XML (that is, it wasn't excluded from the published message) it is ignored by the subscribing system.

When you insert the data from the message into the database, you *must* set the values for the fields that aren't in the message. You can use the `SetDefault` record class method to do this. You could also use a Component Interface based on the component the message was created from to leverage the component defaults.

Related Topics

- [SetDefault method: Record class](#)
- Integration Broker: Understanding Creating Component Interface-Based Services

Considerations When Subscribing to Character Fields

If a message definition has character fields that are defined as uppercase, when the message is subscribed to, character data for those fields is automatically converted to uppercase.

Message Segments

To make processing more efficient, you can divide a large message into pieces using message segments. Generally, you only divide asynchronous messages into segments.

Message nodes can be specified as “segment aware”. If a node is not segment aware and you send an asynchronous message that is segmented to it, you received an error message when viewing the error message log in message details on the message monitor. No publication contracts are created. If you send a synchronous message that is segmented to a node that is not segment aware, you receive an error.

There are several methods for creating, updating, and deleting segments. There are also two properties that you need to take into consideration when working with segments.

If you specify the `SegmentsByDatabase` property as `false`, you can only have the configured number defined in `PSADMIN` (Message Segment From DB). If you specify this property as `true`, you can have as many segments as you need.

The `SegmentsByDatabase` property also specifies whether the segments are kept in memory or written to the database when they are received. If you specify `true`, the segments are automatically written to the database. If you specify `false`, the segments are held in memory. If you specify `true`, then cancel out of the program processing the segments, the changes are not committed to the database.

The `SegmentUnOrder` property is only applicable for asynchronous messages. If you specify the `SegmentUnOrder` property as `true`, the receiving node processes the segments in parallel.

Note

You should use `DeleteSegment` and `UpdateSegment` only when writing to memory, or when `SegmentsByDatabase` is set to `False`. These methods do not work when writing to the database, or when `SegmentsByDatabase` is set to `True`.

The following is an example of how to use the segment properties and methods to send a segmented message. Note that there are only two `CreateNextSegment` calls. By default the first segment is automatically created. The first time you use `CreateNextSegment`, the message is split into two segments. The next time, you add a third segment. You don't need to call `CreateNextSegment` to access the third segment, it's automatically generated.

```
Local Message &MSG;  
Local Rowset &FLIGHT_PROFILE, &RS;  
Local boolean &Bo, &Stuff;  
Local string &lip;  
  
&nTimer = CreateArray("");  
&nTimer[1] = "QE_Y0";  
&nTimer[2] = "QE_STUFF";  
  
QE_FLIGHTDATA.QE_ACNUMBER.Value = QE_FLIGHTDATA.QE_ACNUMBER + 1;  
  
&FLIGHT_PROFILE = GetLevel0();  
  
&MSG = CreateMessage(OPERATION.QE_FLIGHTPLAN);  
  
/* the next lines copy the rowset into the first segment */  
  
&MSG.CopyRowset(&FLIGHT_PROFILE);  
&MSG.CreateNextSegment();  
  
/* This copies the next portion of the rowset into the next segment */  
  
&MSG.CopyRowset(&FLIGHT_PROFILE);  
&MSG.CreateNextSegment();  
  
/* This copies the last portion of the rowset into the third segment */
```

```

&MSG.CopyRowset(&FLIGHT_PROFILE);

/* This specifies that the message segments can be processed separately */

&MSG.IBInfo.SegmentsUnOrder = True;

%IntBroker.publish(&MSG);

```

The following is an example of receiving a segmented message. This would be found in a notification PeopleCode program:

```

Local Message &MSG;
Local Rowset &rs, &rs1;
Local Record &FLIGHTDATA, &REC;

Local string &acnumber_value, &msi_sensor_value, &ofp_value, &actype_value,⇒
&callsign_value, &squadron_value, &comm1_value, &comm2_value, &ecm_value;

Local XmlDoc &xmldoc;
Local string &yo;
Local boolean &bo;

&CRLF = Char(13) | Char(10);

&MSG = %IntBroker.GetMessage();

/* It is very important to set the rowset to null for every iteration */

/* Also, you may want to verify if the segment count is
greater than 10, and if it is, set the SegmentsByDatabase property to True */

For &i = 1 To &MSG.SegmentCount
    &rs = Null;
    &MSG.GetSegment(&i);
    &rs = &MSG.GetRowset();
    &REC = &rs(1).QE_FLIGHTDATA;
    &FLIGHTDATA = CreateRecord(Record.QE_FLIGHTDATA);
    &REC.CopyFieldsTo(&FLIGHTDATA);
    /* Parse out Message Data */
    &acnumber_value = &FLIGHTDATA.QE_ACNUMBER.Value;
    &msi_sensor_value = &FLIGHTDATA.QE_MSI_SENSOR.Value;
    &ofp_value = &FLIGHTDATA.QE_OFP.Value;
    &actype_value = &FLIGHTDATA.QE_ACTYPE.Value;
    &callsign_value = &FLIGHTDATA.QE_CALLSIGN.Value;
    &squadron_value = &FLIGHTDATA.QE_SQUADRON.Value;
    &comm1_value = &FLIGHTDATA.QE_COMM1.Value;
    &comm2_value = &FLIGHTDATA.QE_COMM2.Value;
    &ecm_value = &FLIGHTDATA.QE_ECM.Value;
    &outstring = "Send Async FLight test";
    /* Construct Output String */
    &outstring = &outstring | &acnumber_value | &CRLF | &msi_sensor_value |
&CRLF |⇒
    &ofp_value | &CRLF | &actype_value | &CRLF | &callsign_value | &CRLF |
&squadron_⇒
    value | &CRLF | &comm1_value | &CRLF | &comm2_value | &CRLF | &ecm_value;

```

```

    /* Log Output String into page record */
    &FLIGHTDATA.GetField(Field.DESCRLONG).Value = &outstring;
    SQLExec("DELETE FROM PS_QE_FLIGHTDATA");
    &FLIGHTDATA.Insert();
End-For;

```

Related Topics

- [CreateNextSegment method: Message class](#)
- [SegmentsByDatabase property: Message class](#)
- [SegmentsUnOrder property: IInfo class](#)
- Integration Broker Administration: Understanding Nodes

Content-Based Routing

With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.

With content-based routing, attributes of the message are used to make routing decisions. The attributes are set before the message is published. Then, within your implementation of the `IRouter.OnRouteSend` method, these attributes can be examined and evaluated—for example, to send the message to a defined list of nodes instead of to all nodes. Because the attributes are separate from the message data, the `Message` object itself does not have to be parsed and loaded into a rowset and then searched to get the routing information. This separation of routing attributes from the message data provides a performance improvement over having those routing attributes within the message content.

In the following example, the routing attributes are set with calls to the `AddAttribute` method of the `IInfo` class:

```

Local Message &MSG;
Local Rowset &FLIGHT_PROFILE;
Local string &AC_Type, &Pilot;
Local boolean &bRet;

&FLIGHT_PROFILE = GetLevel0();

&MSG = CreateMessage(Operation.QE_FLIGHTPLAN);

&AC_Type =
GetLevel0().GetRow(1).GetRecord(Record.QE_FLIGHTDATA).AC_TYPE.Value;
&Pilot = GetLevel0().GetRow(1).GetRecord(Record.QE_FLIGHTDATA).PILOT.Value;

&bRet = &MSG.IBInfo.AddAttribute("ACType", &AC_Type);
&bRet = &MSG.IBInfo.AddAttribute("Pilot", &Pilot);

&MSG.CopyRowset(&FLIGHT_PROFILE);

%IntBroker.Publish(&MSG);

```


Then, in the implementation-specific `IRouter.OnRouteSend` method, the message attributes are evaluated to make routing decisions. The `OnRouteSend` method does not load and examine the `Message` object itself, only the attributes:

```
import PS_PT:Integration:IRouter;

class RoutingHandler implements PS_PT:Integration:IRouter;
  method RoutingHandler();
  property array of any destinationNodes;
  method OnRouteSend(&MSG As Message) Returns integer;
  method GetDestinationList(&AC_Type As string, &Pilot As string) Returns
any;
end-class;

/* constructor */
method RoutingHandler
end-method;

method OnRouteSend
  /* &MSG as Message */
  /* Returns Integer */
  /* Extends/implements PS_PT:Integration:IRouter.OnRouteSend */
  /* Variable Declaration */
  Local string &AC_Type;
  Local string &Pilot;
  Local any &aNodeList;
  Local integer &i;
  If &MSG.IBInfo.GetNumberOfAttributes() = 0 Then
    Return (%IntBroker_ROUTE_NONE);
  End-If;
  For &i = 1 To &MSG.IBInfo.GetNumberOfAttributes()
    If &MSG.IBInfo.GetAttributeName(&i) = "ACType" Then
      &AC_Type = &MSG.IBInfo.GetAttributeValue(&i);
    End-If;
    If &MSG.IBInfo.GetAttributeName(&i) = "Pilot" Then
      &Pilot = &MSG.IBInfo.GetAttributeValue(&i);
    End-If;
  End-For;
  /* method evaluates these strings and return NodeList */
  &aNodeList = %This.GetDestinationList(&AC_Type, &Pilot);
  Evaluate &aNodeList
  When "True"
    Return (%IntBroker_ROUTE_ALL);
    Break;
  When "False"
    Return (%IntBroker_ROUTE_NONE);
    Break;
  When-Other
    &destinationNodes = &aNodeList.Clone();
    Break;
  End-Evaluate;
end-method;

method GetDestinationList
  /* &AC_Type as String, */
  /* &Pilot as String */
```

```

    /+ Returns Any +/
    /* determine node list based on input data */
    Return Null;
end-method;

```

Related Topics

- [AddAttribute method: IBInfo class](#)
- [GetAttributeName method: IBInfo class](#)
- [GetAttributeValue method: IBInfo class](#)
- [GetNumberOfAttributes method: IBInfo class](#)

Error Handling

In your notification PeopleCode, you may want to validate the information received in the message. If you find that the data isn't valid, use `Exit(1)` to end your PeopleCode program. This sets the status of the message to `ERROR`, logs any error messages to the Application Message Queues, and automatically rolls back any database changes you may have made.

There are many ways to validate the data and capture the error messages:

- Use `ExecuteEdits` on the message object
- Use `ExecuteEdits` on the record object
- Use a Component Interface

Write your own validation PeopleCode in the notification program:

The following example validates the Business Unit of a message against an array of valid BU's:

```

For &I = 1 To &ROWSET.RowCount;

    &POSITION = &BUArray.Find(&ROWSET(&I).GetRecord(1).BUSINESS_UNIT.Value);
    If &POSITION = 0 Then
        &Status = "ERROR: BU not Found or not Active";
        &ROWSET(&I).BCT_ADJS_MSG_VW.BUSINESS_UNIT.IsEditError = True;
        &ROWSET(&I).BCT_ADJS_MSG_VW.BUSINESS_UNIT.MessageSetNumber = 11100;
        &ROWSET(&I).BCT_ADJS_MSG_VW.BUSINESS_UNIT.MessageNumber = 1230;
    /* The error message 11100-1230 reads: This Business Unit is */
    /* not a valid, open, Inventory Business Unit */

    End-If;

End-For;

```

In the calling PeopleCode, the program calls `Exit(1)` based on the value of `&Status`.

Note

All errors for notification PeopleCode get logged to the application message error table, *not* to the `PSMessages` collection (on the session object.)

Related Topics

- [ExecuteEdits method: Message class](#)
- [ExecuteEdits method: Record class](#)
- Integration Broker: Processing Inbound Errors

Message Classes Reference

This reference section documents the following message classes and functions:

- Message class built-in functions.
- Message class.
- IntBroker class.
- IBInfo class.
- IBConnectorInfo collection.

Message Class Built-In Functions

PeopleCode Language Reference: AddSystemPauseTimes function

PeopleCode Language Reference: CreateMessage function

PeopleCode Language Reference: DeleteSystemPauseTimes function

PeopleCode Language Reference: PingNode function

PeopleCode Language Reference: ReValidateNRXmlDoc function

Message Class Methods

In this section, we discuss the Message class methods. The methods are discussed in alphabetical order.

Clone method: Message class

Syntax

Clone()

Description

The Clone method creates an identical copy of the message, copying the data tree of the message executing the method. The Clone function sets the following properties for the resulting message object, based on the values set for the message definition created in Pure PeopleSoft Internet Architecture:

- Name
- QueueName
- IsOperationActive

Other properties are set when the message is published or subscribed to (TransactionID, PubNodeName, and so on), or are dynamically generated at other times (Size, IsEditError, and so on.)

Clone creates a unique version of the message. If the original message changes, it is not reflected in the cloned object.

Parameters

None.

Returns

A message object.

Example

Clone could be used in a Hub and Spoke messaging environment. The Hub node uses this method during notification processing to publish a copy of the messages it receives from the Spokes.

```
&Msg = %IntBroker.GetMessage();  
&Rowset = &Msg.GetRowset();  
&Clone = &Msg.Clone();
```

```
%IntBroker.Publish(&Clone);
```

The hub's publication routing rules are then used to determine which spokes receive the message.

Related Topics

- [CopyRowset method: Message class](#)
- PeopleCode Language Reference: CreateMessage function
- PeopleCode Developer's Guide: Assigning Objects

CopyPartRowset method: Message class

Syntax

```
CopyPartRowset(PartIndex, &Rowset)
```

Description

Use the CopyPartRowset to copy the rowset specified by &Rowset to the part of the message specified by PartIndex.

Note

This method only works with rowset-based container messages.

The primary record of the level zero rowset for both the specified message part and the specified rowset must be the same.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the part you want to copy the rowset data to.
<i>&Rowset</i>	Specify an already instantiated rowset object that contains the data that you want to copy to the message part.

Returns

None.

Related Topics

- [GetPartRowset method: Message class](#)
- [GetPartXMLDoc method: Message class](#)

CopyRowset method: Message class

Syntax

```
CopyRowset(source_rowset [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
RECORD.source_recname1, RECORD.target_recname1
```

```
[, RECORD.source_recname2, RECORD.target_recname2]. . .
```

Description

The CopyRowset method copies data from the source rowset to the like-named fields in the message object executing the method. This is an easy way to populate a message with data from a component.

Note

If a Related Language record is defined on a record that is effective dated, then the result of the CopyRowset method will not populate the Effective Date or Effective Sequence fields due to possible ambiguity when processed on the receiving system. If these fields are desired to include this information, then the Message Rowset can be updated accordingly after the CopyRowset call is invoked.

Note

CopyRowset copies the data, including rows that haven't been modified. If you want to copy only data that has changed in some way, use the CopyRowsetDelta method.

See [CopyRowsetDelta method: Message class](#).

When the record names in the message and component do not match exactly, use the optional *record_list* to specify the records to be copied from the component into the message.

When you use the CopyRowset method to copy the contents from the source rowset to the message object, you are creating a *unique* copy of the object. If you change the original rowset, the message object is not changed.

Note

You can execute CopyRowset against a message only once. After a message is populated, any other CopyRowsets are ignored. If you have to populate different levels of a message rowset separately, you can use the CreateRowset method to create a rowset that has the same structure as your message, populate the created rowset, then use CopyRowset to populate your message. You can also use the Rowset CopyTo method to populate a message rowset, then populate the PSCAMA record by hand.

Parameters

Parameter	Description
<i>source_rowset</i>	Specifies the name of the rowset to be copied into the message object.
<i>record_list</i>	Specifies specific source and target records to be copied into the message object.

Returns

None.

Example

The following example copies an entire component into a message object.

```
&Msg = %IntBroker.GetMessage();
&Rowset = &Msg.GetRowset()
&Component_Rowset = GetLevel0();
&Msg.CopyRowset(&Component_Rowset);
```

The following example copies a header/line page rowset into a header/line message object, using the *record_list* because the record names don't match:

```
&Msg = %IntBroker.GetMessage();
&Rowset= &Msg.GetRowset();
&Component_Rowset = GetLevel0();
```

```
&Msg.CopyRowset(&Component_Rowset, RECORD.PO_HDR_VW, RECORD.PO_HDR, ⇒  
RECORD.PO_LINE_VW, RECORD.PO_LINE);
```

Related Topics

- [CopyRowsetDelta method: Message class](#)
- PeopleCode Language Reference: GetRowset function
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- [Fill method: Rowset class](#)

CopyRowsetDelta method: Message class

Syntax

```
CopyRowsetDelta(source_rowset [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
[RECORD.source_recname1, RECORD.target_recname1
```

```
[, RECORD.source_recname2, RECORD.target_recname2]]. . .
```

Description

The CopyRowsetDelta method copies rows of data that have changed from the source rowset to the like-named records and like-named fields in the message object executing the method.

Note

CopyRowsetDelta copies all the like-named fields from the changed *row* into the message. It is *not* copying just the changed like-named fields.

When the record names in the message and component do not match exactly, use the optional *record_list* to specify the records to be copied from the component into the message. The specified target records must be records in your message, while the specified source records must be records in a rowset that exists in the data buffer and is populated.

This is an easy way to populate a message when the records in the message match the records in the component that the message is published from.

In addition, the CopyRowsetDelta method sets the AUDIT_ACTN field in the PSCAMA table for every row in the message. The notification process can then use PSCAMA.AUDIT_ACTN to determine how to process every row that was published.

The set values match those used in audit trail processing, that is:

- A - Row inserted.
- D - Row deleted.

- C - Row changed (updated), but no key fields changed. The system copies the new value to the Message rowset.
- K - Row changed (updated), and at least one key field changed. The system copies the old value to the Message rowset and the new value (see "N").
- N - Row changed (updated), and at least one key field changed. The system copies the old value to the Message rowset and the new value (see "K").
- "" – blank value means that nothing on that row has changed. This is the default value, and is the value used to tag the parent rows of children that have changed.

Note

If a child row is inserted (or changed or deleted) CopyRowsetDelta also copies the parent row (and the parent row of that row, and so on, up to the top row) so the subscriber has a full picture of the transaction. A blank value is set in the AUDIT_ACTN field for these rows to let the subscriber know they don't have to take action; the parent rows are there for reference only.

The Audit_Action values "A", "C", "D" are set when a record is added, changed, or deleted, respectively. In some cases such as effective-dated records, the user may change a key field value, such as Effective Date. In response to such an user action, two records are created, one with an Audit_Action value of "N", and the other with Audit_Action value "K". The "N" record has all the new values, while the "K" record retains the old values.

When you use the CopyRowsetDelta method to copy the contents from the source rowset to the message object, you are creating a *unique* copy of the object. If you change the original rowset, the message object is not be changed.

Note

You can execute CopyRowsetDelta against a message only once. After a message is populated, any other CopyRowsetDeltas are ignored. If you have to populate different levels of a message rowset separately, you can use the CreateRowset method to create a rowset that has the same structure as your message, populate the created rowset, then use CopyRowsetDelta to populate your message. You can also use the Rowset CopyTo method to populate a message rowset, then populate the PSCAMA record by hand.

Parameters

Parameter	Description
<i>source_rowset</i>	Specifies the name of the rowset to be copied into the message object.
<i>record_list</i>	Specifies source and target records to be copied into the message object. The target records must be records in your message, while the source records must be records in a rowset that exists in the data buffer and is populated.

Returns

None.

Example

The following example copies all the changed rows of data from a component into a message object.

```
&Component_Rowset = GetLevel0();  
  
&Msg.CopyRowsetDelta(&Component_Rowset);
```

Related Topics

- [CopyRowset method: Message class](#)
- Integration Broker: PSCAMA
- PeopleCode Developer's Guide: Assigning Objects
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- PeopleCode Language Reference: GetRowset function

CopyRowsetDeltaOriginal method: Message class

Syntax

```
CopyRowsetDeltaOriginal(source_rowset [, record_list]);
```

Where *record_list* is a list of record names in the form:

```
[RECORD.source_recname1, RECORD.target_recname1  
  
[, RECORD.source_recname2, RECORD.target_recname2]].  
.  
.
```

Description

The CopyRowsetDeltaOriginal method copies rows of data that have changed from the source rowset to the like-named records and like-named fields in the message. It also copies the original value of the changed rows.

Note

CopyRowsetDeltaOriginal copies all the like-named fields from the changed and original rows into the message. It is not copying just the changed like-named fields.

When the record names in the message and component do not match exactly, use the optional *record_list* to specify the records to be copied from the component into the message. The specified target records must be records in your message, while the specified source records must be records in a rowset that exists in the data buffer and is populated.

The CopyRowsetDeltaOriginal method sets the AUDIT_ACTN field in the PSCAMA table for every row in the message. The notification process can then use PSCAMA.AUDIT_ACTN to determine how to process every row that was published.

The set values match those used in audit trail processing, that is:

- A - Row inserted.
- D - Row deleted.
- C - Row changed (updated), but no key fields changed. The system copies the new value to the Message rowset and the original value (see "O" below).
- O - Prior value of changed row. The system copies the new value to the Message rowset and the original value (see "C").
- K - Row changed (updated), and at least one key field changed. The system copies the original value to the Message rowset and the new value (see "N").
- N - Row changed (updated), and at least one key field changed. The system copies the original value to the Message rowset and the new value (see "K").
- "" – blank value means that nothing on that row has changed. This is the default value, and is the value used to tag the parent rows of children that have changed.

Note

If a child row is inserted (or changed or deleted) CopyRowsetDeltaOriginal also copies the parent row (and the parent row of that row, and so on, up to the top row) so the subscriber has a full picture of the transaction. A blank value is set in the AUDIT_ACTN field for these rows to let the subscriber know they don't have to take action; the parent rows are there for reference only.

The Audit_Action values "A", "C", "D" are set when a record is added, changed or deleted, respectively. When a row is changed, two records are created, one with an Audit_Action of "C", the other with Audit_Action value of "O". The "C" record has all the new values, while the "O" record retains the original values. In some cases such as effective-dated records, a user may change a key field value, such as Effective Date. In response to such an user action, two records are created, one with an Audit_Action value of "N", and the other with Audit_Action value "K". The "N" record has all the new values, while the "K" record retains the original values. The "N"/"K" combination is also created if both a key change and a non-key change is made on the same row of data.

The following table details the output from CopyRowsetDeltaOriginal:

User Action	CopyRowsetDeltaOriginal Output	Comments
Change a key.	"N" and "K" rows created.	The "K" row contains the original Key value, the "N" row, the new.

User Action	CopyRowsetDeltaOriginal Output	Comments
Change a Key + change a Non-Key.	"N" and "K" rows created only (that is: no "C"/"O" rows in that case).	The Key and Non-Key Original Values are both contained in the "K" row.
Change a Non-Key.	"C" and "O" rows created.	Original Value stored in "O" row.
Add non-effective dated row.	"A" row created.	No additional rows created.
Add effective-dated row and only 1 original effective-dated row exists.	"A" and "O" rows created.	"O" row contains the original effective dated row.
Add effective-dated row and more than 1 original effected dated rows exist.	"A" and "O" rows created.	"O" row contains data from row that cursor was on when the new row was added. For example: If a rowset contains two rows (01/01/1980 and 02/02/2000), the current row is the 01/01/1980 row and the user adds a new row with today's date. The original values contain the data from the 01/01/1980. Likewise, if a rowset contains two rows (01/01/1980 and 02/02/2000), the current row is the 02/02/2000 row and the user adds a new row with today's date. Then the original values contain the data from the 02/02/2000.
Delete a row	"D" row created.	No additional rows created.

When you use the CopyRowsetDeltaOriginal method to copy the contents from the source rowset to the message object, you are creating a unique copy of the object. If you change the original rowset, the message object is not changed.

Note

You can execute CopyRowsetDeltaOriginal against a message only once. After a message is populated, any other CopyRowsetDeltaOriginal PeopleCode statements are ignored. If you have to populate different levels of a message rowset separately, you can use the CreateRowset method to create a rowset that has the same structure as your message, populate the created rowset, then use CopyRowsetDeltaOriginal to populate your message. You can also use the Rowset CopyTo method to populate a message rowset, then populate the PSCAMA record manually.

Parameters

Parameter	Description
<i>source_rowset</i>	Specifies the name of the rowset to be copied into the message object.

Parameter	Description
<i>record_list</i>	Specifies source and target records to be copied into the message object. The target records must be records in your message, while the source records must be records in a rowset that exists in the data buffer and is populated.

Returns

None.

Example

```
Function Update_Dir(&MSGName As string)
```

```
    &MSGName = "OPERATION." | &MSGName;  
    &MSG = CreateMessage(@(&MSGName));  
  
    &PnlRowset = GetLevel0();  
    &MSG.CopyRowsetDeltaOriginal(&PnlRowset);  
    %IntBroker.Publish(&MSG);
```

```
End-Function;
```

Related Topics

- [CopyRowset method: Message class](#)
- [CopyRowsetDelta method: Message class](#)
- Integration Broker: PSCAMA
- PeopleCode Developer's Guide: Assigning Objects
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

CreateNextSegment method: Message class

Syntax

```
CreateNextSegment()
```

Description

Use the CreateNextSegment method to divide a message into segments. You generally only divide asynchronous messages that contain a large amount of data. This method is used only when creating a message for publication, not after a message has been published.

Parameters

None.

Returns

None.

Example

See [Message Segments](#).

Related Topics

- [CreateNextSegment method: Message class](#)
- [DeleteSegment method: Message class](#)
- [SegmentRestart method: Message class](#)
- [UpdateSegment method: Message class](#)
- [CurrentSegment property: Message class](#)
- [SegmentCount property: Message class](#)

DeleteSegment method: Message class

Syntax

```
DeleteSegment(SegmentNumber)
```

Description

Use the DeleteSegment method to delete the specified segment. This method is used only when creating a message for publication, not after a message has been published.

Note

You should use DeleteSegment and UpdateSegment only when writing to memory, or when SegmentsByDatabase is set to False. These methods do not work when writing to the database, or when SegmentsByDatabase is set to True.

Parameters

Parameter	Description
<i>SegmentNumber</i>	Specify a number indicating which segment you want to delete from the unpublished message.

Returns

None.

Related Topics

- [CreateNextSegment method: Message class](#)
- [GetSegment method: Message class](#)
- [UpdateSegment method: Message class](#)

- [CurrentSegment property: Message class](#)
- [SegmentCount property: Message class](#)

ExecuteEdits method: Message class

Syntax

```
ExecuteEdits([editlevels]);
```

where *editlevels* is a list of values in the form:

```
editlevel1 [+ editlevel2] . . .];
```

and where *editleveln* is one of the following system constants:

%Edit_DateRange

%Edit_OneZero

%Edit_PromptTable

%Edit_Required

%Edit_TranslateTable

%Edit_YesNo

Description

The ExecuteEdits method executes the standard system edits on every field for every record in the message executing the method. All edits are based on the record edits defined for the record that the message is based on. The types of edits performed depends on the *editlevel*. If no *editlevel* is specified, all system edits defined for the record definition are executed, that is:

- Reasonable Date Range (Is the date contained within plus or minus 30 days from the current date?)
- 1/0 (Do all 1/0 fields only contain 1 or 0?)
- Prompt Table (Is field data contained in the specified prompt table?)
- Required Field (Do all required fields contain data? For numeric or signed fields, it checks that they do not contain NULL or 0 values.)
- Translate Table (Is field data contained in the translate table?)
- Yes/No (Do all yes/no fields only contain only yes or no data?)

Note

ExecuteEdits does not perform any validation on DateTime fields.

If any of the edits fail, the status of the property IsEditError is set to True for the Message Object executing the method, and any Rowset, Row, Record, or Field Objects that could be instantiated from the same data as the Message Object. In addition, the Field class properties

MessageNumber and MessageSetNumber are set to the number of the returned message and message set number of the returned message, for the field generating the error.

If you want to check the field values only for a particular record, you can use the ExecuteEdits method with a record object.

In addition, if you want to dynamically set the prompt tables used for a field (with the %EditTable function) you must use the SetEditTable method.

Parameters

Parameter	Description
<i>editlevel</i>	Specifies the standard system edits to be performed against every field on every record. If <i>editlevel</i> isn't specified, all system edits are performed. <i>editlevel</i> can be any of the following system constants: • %Edit_DateRange • %Edit_OneZero • %Edit_PromptTable • %Edit_Required • %Edit_TranslateTable • %Edit_YesNo

Returns

None.

Example

The following is an example of a call to execute Required Field and Prompt Table edits:

```
&MSG.ExecuteEdits(%Edit_Required + %Edit_PromptTable);
```

The following is an example showing how ExecuteEdits() could be used:

```
&MSG.ExecuteEdits();  
If &MSG.IsEditError Then  
    Exit(1);  
End-If;
```

Considerations for ExecuteEdits and SetEditTable

If an effective date is a key on the prompt table, and the record being edited doesn't contain an effective-dated field, the current date/time is used as the key value.

If a setID is a key on the prompt table, and the record being edited doesn't contain a setID field, the system looks for the setID on the other records in the current row first, then search parent rows.

Considerations for ExecuteEdits and Numeric Fields

A zero (0) might or might not be a valid value for a numeric field. ExecuteEdits processes numeric fields in different ways, depending on whether the field is required:

- If the numeric field is required: 0 is considered invalid.

- If the numeric field is not required: 0 is considered valid.

Related Topics

- [SetEditTable method: Message class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)
- [IsEditError property: Record class](#)
- [ExecuteEdits method: Record class](#)
- Integration Broker: Processing Inbound Errors

FirstCorrelation method: Message class

Syntax

```
FirstCorrelation()
```

Description

Use this method within an Integration Broker OnPreNotify event on the subscribing node to determine if this is the first message with this correlation ID.

Parameters

None.

Returns

A Boolean value: True if this is the first message with this correlation ID, False if a previous message with the same correlation ID has already run the OnPreNotify event.

Example

To improve the performance of correlated messages with multiple segments, use the FirstCorrelation method to run the OnPreNotify event for the first correlated message only. On the first message to be published, set the InitializeConversationId property to True. After the message is published, retrieve the transaction ID from the message. This transaction ID should be used to set the conversation ID (that is, the correlation ID) for all subsequent messages to be published.

```
/* On the first message to be published */

&MSG.InitializeConversationId = True;
%IntBroker.Publish(&MSG);
&strCorrelationID = &MSG.TransactionID;

/* For all subsequent correlated messages */

&MSG.IBInfo.ConversationID = &strCorrelationID;
%IntBroker.Publish(&MSG);
```


Then, on the subscribing node, use the `FirstCorrelation` method to run the `OnPreNotify` event one time only:

```
If &MSG.FirstCorrelation() = True Then
    /* process the OnPreNotify event logic */
End-If;
```

Related Topics

- [InitializeConversationId property: Message class](#)
- [TransactionId property: Message class](#)
- [ConversationID property: IBInfo class](#)
- Integration Broker Administration: Using the `OnPreNotify` and `OnPostNotify` PeopleCode Events

GenXMLPartString method: Message class

Syntax

```
GenXMLPartString(PartIndex)
```

Description

Use the `GenXMLPartString` to create an XML string based on the message part specified by *PartIndex*.

Note

This method only works with rowset-based container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the part that you want to generate an XML string for.

Returns

An XML string.

Related Topics

- [GenXMLString method: Message class](#)
- [GetPartRowset method: Message class](#)
- [LoadXMLPartString method: Message class](#)

GenXMLString method: Message class

Syntax

GenXMLString()

Description

The GenXMLString method creates an XML string based on the message after it's loaded from the message buffer.

Note

This method does not support nonrowset-based messages.

Parameters

None.

Returns

An XML string.

Example

In the following example, the first three lines of code creates the message object and copies the data from a Component buffer into the message object. The last line creates an XML string based on that message object.

```
&MSG = CreateMessage(OPERATION.PO_INSERT);  
&RS = GetLevel0();  
&MSG.CopyRowset(&RS);  
&XML_STRING = &MSG.GenXMLString();
```

Related Topics

- [LoadXMLString method: Message class](#)

GetContentString method: Message class

Syntax

GetContentString([*SegmentIndex*])

Description

Use the GetContentString to return a string populated with the content from the specified message segment. If you don't specify a segment, the data from the first segment is used.

Parameters

Parameter	Description
<i>SegmentIndex</i>	Specify the message segment that you want to access.

Returns

A string populated with the content of the specified segment if successful, null otherwise.

Related Topics

- [CreateNextSegment method: Message class](#)
- [SetContentString method: Message class](#)

GetDocument method: Message class

Syntax

```
GetDocument([segmented_message])
```

Description

Use these method to get a Document object associated with this message.

① Note

If a fault occurs, continue to use GetContentString to read the fault message, and not GetDocument.

Parameters

Parameter	Description
<i>segmented_message</i>	Specify a Boolean value indicating whether the message is segmented.

Returns

A Document object.

Example

```
Local Message &Msg;  
Local Document &Doc;  
  
&Msg = CreateMessage(Operation.QEFLIGHTPLAN_DOC);  
  
&Doc = &Msg.GetDocument( True);  
  
/* populate the document */
```

```
...

&Msg.CreateNextSegment();

&Doc = Null;
&Doc = &Msg.GetDocument( True);

/* populate the document */

...
```

Related Topics

- [GetContentString method: Message class](#)
- [Document Class](#)

This section provides an overview of the Document class and discusses:

GetJsonObject method: Message class

Syntax

```
GetJsonObject()
```

Description

Use the GetJsonObject method to retrieve the message data as a JSON object.

Note

You must use this method with a valid object. If JSON data does not exist in the object, it returns NULL.

Parameters

None.

Returns

A JSON object; returns NULL if JSON data does not exist in the object.

Example

```
&jReqObject = &MSG.GetJsonObject();
/* read out content of Json data from message */
If All(&jReqObject) Then
/* get data out of Json object */
    &str = &jReqObject.ToString();
Else
    /* no Json data in message */

End-If;
```

Related Topics

- [SetJsonObject method: Message class](#)

GetPartAliasName method: Message class

Syntax

```
GetPartAliasName(PartIndex)
```

Description

Use the GetPartAliasName to access the alias of the specified message part.

Note

This method works only with container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the message part that you want to access the alias.

Returns

A string containing the message part alias.

Related Topics

- [AliasName property: Message class](#)
- Integration Broker: Specifying Record Aliases

GetPartName method: Message class

Syntax

```
GetPartName(PartIndex)
```

Description

Use the GetPartName method to return the message name of the message specified by *PartIndex*.

Note

This method works only with container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the message part that you want to get the name for.

Returns

A string.

Related Topics

- [CopyPartRowset method: Message class](#)
- [GenXMLPartString method: Message class](#)

GetPartRowset method: Message class

Syntax

GetPartRowset(*PartIndex*)

Description

Use the GetPartRowset to instantiate and populate a rowset object based on the specified message part in a container message.

Note

This method only works with rowset-based container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the message part that you want to instantiate and populate a rowset from.

Returns

A reference to a rowset object if successful, Null otherwise.

Related Topics

- [CopyPartRowset method: Message class](#)
- [GenXMLPartString method: Message class](#)

GetPartVersion method: Message class

Syntax

`GetPartVersion(PartIndex)`

Description

Use the `GetPartVersion` method to return the version number of the message part specified by *PartIndex*.

Note

This method only works with container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the message part that you want to access the version of.

Returns

A string containing the version number.

Related Topics

- [PartCount property: Message class](#)

GetPartXMLDoc method: Message class

Syntax

`GetPartXMLDoc(PartIndex)`

Description

Use the `GetPartXMLDoc` to retrieve the message part data as an `XmlDoc` object.

Note

This method can only be used for a nonrowset-based message parts.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the message part that you want to access the data for as an XmlDocument object.

Returns

An XmlDocument object populated with the message part data.

Related Topics

- [GetXmlDoc method: Message class](#)
- [GetPartRowset method: Message class](#)

GetQueryString method: Message class

Syntax

GetQueryString(*Parameter_Name*)

Description

Use the GetQueryString method to obtain the parameter values of a query string.

Note

This method has been desupported and remains for backward compatibility only. Use the IBConnectorInfo collection GetQueryStringArg method instead.

Parameters

Parameter	Description
<i>Parameter_Name</i>	Specify the parameter name you want to obtain.

Returns

A string containing the value of the parameter.

Example

```
Local Message &request;  
Local Rowset &Rowset;  
Local String &emplid;  
  
&request = %IntBroker.GetMessage();  
&Rowset = &request.GetRowset();  
&emplid = &request.GetQueryString("EMPLID");
```


Related Topics

- [GetQueryStringArgName method: ConnectorInfo collection](#)
- [GetQueryStringArgName method: ConnectorInfo collection](#)
- [GetQueryStringArgValue method: ConnectorInfo collection](#)
- [SetQueryString method: Message class](#)

GetRowset method: Message class

Syntax

```
GetRowset([version])
```

Description

The GetRowset method returns a standard PeopleCode level zero rowset object for the specified message version. It creates an empty rowset for the specified message version if it doesn't already exist. If no message version is specified, the default message version is used.

When you use the GetRowset method, you are not creating a unique copy of the object. You are making only a copy of the reference. If you change the rowset, the original message is changed.

Parameters

Parameter	Description
<i>version</i>	An optional parameter, specifying an existing message version as a string. If <i>version</i> isn't specified, the default message version is used.

Returns

A Rowset object if successful.

Example

The following gets all the SET_CNTRL_REC rows related to the row on the page, then updates the field SETID with the value from the page. GetRowset is used to create a rowset based on the message structure, that is, an unpopulated rowset. Because the rowset is unpopulated, you can use the Fill method to populate with data from the page.

```
Local Message &MSG;  
Local Rowset &MSG_ROWSET;  
  
If FieldChanged(SETID) Then  
    &MSG = CreateMessage(OPERATION.SET_CNTRL_REC);  
    &MSG_ROWSET = &MSG.GetRowset();  
    &MSG_ROWSET.Fill("where SETCNTRLVALUE =:1 and REC_GROUP_ID =:2",  
        SETCNTRLVALUE, ⇒  
        REC_GROUP_ID);  
  
    For &I = 1 To &MSG_ROWSET.ActiveRowCount  
        &MSG_ROWSET.GetRow(&I).SET_CNTRL_REC.SETID.Value = SETID;  
        &MSG_ROWSET.GetRow(&I).PSCAMA.AUDIT_ACTN.Value = "C";  
    End For  
End If
```

```
End-For;  
  
%IntBroker.Publish(&MSG);  
  
End-If;
```

Related Topics

- [Clone method: Message class](#)
- PeopleCode Language Reference: CreateMessage function
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- PeopleCode Developer's Guide: Assigning Objects

GetSegment method: Message class

Syntax

```
GetSegment(SegmentNumber)
```

Description

Use the GetSegment method to return the specified segment. This method doesn't actually return anything, but populates the current message object with the specified segment's data.

Parameters

Parameter	Description
<i>SegmentNumber</i>	Specify the number of the segment you want to access.

Returns

None.

Related Topics

- [CreateNextSegment method: Message class](#)
- [DeleteSegment method: Message class](#)
- [UpdateSegment method: Message class](#)
- [SegmentCount property: Message class](#)

GetURIDocument method: Message class

Syntax

```
GetURIDocument()
```

Description

Use this method to retrieve the document template as defined on the service operation.

Parameters

None.

Returns

A Document object.

Example

```
&MSG = CreateMessage(Message.WEATHERSTATION_GET);
&DOC = &MSG.GetURIDocument();
&COM = &DOC.DocumentElement;

&COM.GetPropertyByName("state").Value = "Washington";
&COM.GetPropertyByName("city").Value = "Redmond";
&COM.GetPropertyByName("day").Value = "today";
&COM.GetPropertyByName("week").Value = "first";
&COM.GetPropertyByName("year").Value = "2010";
&COM.GetPropertyByName("country").Value = "USA";
&MSG.URIResourceIndex = 1;
&bRet = &MSG.IBInfo.LoadRESTHeaders();
&return_message = %IntBroker.SyncRequest(&MSG);
```

Related Topics

- Integration Broker: REST Resource Definitions

GetURIResource method: Message class

Syntax

```
GetURIResource([index])
```

Description

Use this method to retrieve the URI for the representational state transfer (REST) resource based on the specified index.

Parameters

Parameter	Description
<i>index</i>	Corresponds to the row number in the URI grid of the REST Resource Definition section of the service operation definition.

Returns

A string.

Example

```
&MSG = CreateMessage(Message.WEATHERSTATION_GET);  
&DOC = &MSG.GetURIDocument();  
  
&STR = &MSG.GetURIResource(2);
```

Related Topics

- [ConversationID property: IInfo class](#)
- Integration Broker: REST Resource Definitions

GetXmlDoc method: Message class

Syntax

```
GetXmlDoc()
```

Description

Use the GetXmlDoc method to retrieve the message data as an XmlDocument object.

Note

This method can only be used for a nonrowset-based message. If you use this method with a rowset-based message an error message is returned.

Parameters

None.

Returns

An XmlDocument object.

Related Topics

- [SetXmlDoc method: Message class](#)
- [Understanding XmlDocument Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDocument class is used to create and manipulate XML data.

InBoundPublish method: Message class

Syntax

```
InBoundPublish(PubNodeName)
```

Description

Use the `InBoundPublish` method to send an asynchronous message based on a message rowset to simulate an inbound asynchronous request from an external node.

Note

This method has been desupported and remains for backward compatibility only. Use the `IntBroker` class `InBoundPublish` method instead.

Though you are sending a message to yourself, it goes through all the inbound message processing on *PubNodeName*.

Parameters

Parameter	Description
<i>PubNodeName</i>	Specify the name of the node for which you want to test inbound message publishing.

Returns

None.

Related Topics

- [InBoundPublish method: IntBroker class](#)
- PeopleCode Language Reference: `InboundPublishXmlDoc` function
- Integration Broker: Understanding Filtering, Transformation, and Translation

LoadXMLPartString method: Message class

Syntax

```
LoadXMLPartString(PartIndex, XmlString)
```

Description

Use the `LoadXMLPartString` method to populate the part of the container message specified by *PartIndex* with the XML string *XmlString*.

Note

This method works only with container messages.

Parameters

Parameter	Description
<i>PartIndex</i>	Specify the number of the part of the container message that you want to populate with XML data.
<i>XmlString</i>	Specify the XML string to be loaded into the message part.

Returns

None.

Related Topics

- [GenXMLPartString method: Message class](#)
- [GenXMLString method: Message class](#)

LoadXMLString method: Message class

Syntax

LoadXMLString(*XMLstring*)

Description

The LoadXMLString method loads the message object executing the method with the XML string *XMLstring*.

Parameters

Parameter	Description
<i>XMLString</i>	Specify the XML string to be loaded into the message object.

Returns

None.

Example

```
&MSG = CreateMessage(OPERATION.PO_HEADER);  
&MSG.LoadXMLString(&XML_STRING);
```

Related Topics

- [GenXMLString method: Message class](#)

OverrideRESTBaseURL method: Message class

Syntax

```
OverrideRESTBaseURL(string)
```

Description

Use this method on the subscribing node (the consumer) to override the base URL portion of the generated URL for a REST-based transaction.

Parameters

Parameter	Description
<i>string</i>	Specifies the base URL to be added to the URI template portion to generate the full URL to the REST-based resource.

Returns

None.

Example

```
&MSG = CreateMessage(Operation.QE_WEATHERSTATION_CONSUME_GET);  
&MSG.OverrideURIResource("http://myexample.com/PSIGW/RESTListeningConnector/  
AKTT");
```

OverrideURIResource method: Message class

Syntax

```
OverrideURIResource(string)
```

Description

Use this method on the subscribing node (the consumer) to override the URI template portion of the generated URL for a REST-based transaction.

Parameters

Parameter	Description
<i>string</i>	Specifies the URI to be added to the base URL to generate the full URL to the REST-based resource.

Returns

None.

Example

```
&MSG = CreateMessage(Operation.QE_WEATHERSTATION_CONSUME_GET);  
&MSG.OverrideURIResource("WeatherStation.v1/weather/Washington");
```

Publish method: Message class

Syntax

```
Publish([NodeName] [, Deferred_Mode] )
```

Description

The Publish method publishes a message to the application message queue for the default message version.

Note

This method has been desupported and remains for backward compatibility only. Use the IntBroker class Publish method instead.

This method does not publish the message if the IsActive property is False.

This method publishes a message asynchronously, that is, a reply message is not automatically generated. To publish a message synchronously, use the SyncRequest method.

Note

This method supports nonrowset-based messages only if the data is populated using the SetXmlDoc method.

If the Publish method is called and the message isn't populated (either using SetXmlDoc or one of the rowset methods,) an empty message is published.

The Publish method can be called from any PeopleCode event, but is generally called from an Application Engine PeopleCode step or from a component.

When publishing from a component, you should publish messages only from the SavePostChange event, either from record field or component PeopleCode. This way, if there's an error in your publish code, the data isn't committed to the database. Also, since SavePostChange is the last Save event fired, you avoid locking the database while the other save processing is happening.

However, until the message is published, the tables involved with the component are locked and are not saved. To avoid problems with this, specify the *Deferred_Mode* property as true, so the message is published after the table data has been committed to the database.

Generally, if the message is successfully published, the PubID, and PubNodeName properties are set to the publication ID and publishing system node name, respectively. The only exception is when the Publish is performed as part of your notification PeopleCode. The

notification process is always executed in deferred mode, due to performance considerations, and so the PubID is not populated.

Note

If you're publishing a message from within an Application Engine program, the message won't actually be published until the calling program performs a Commit.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the node to which the message should be published.
<i>Deferred_Mode</i>	Specify whether the message should be published immediately or at the end of the transaction. This parameter takes a Boolean value: False, publish the message immediately, or True, defer the publication. The default value is False.

Returns

None.

Example

The following copies all the data from a page into a message and publishes it.

```
Local Message &MSG;  
Local Rowset &ROWSET;  
  
&MSG = CreateMessage(OPERATION.MESSAGE_PO);  
&ROWSET = GetLevel0();  
&MSG.CopyRowset(&ROWSET);  
&MSG.Publish;
```

The following is an example of putting the Incremental Publish PeopleCode on a Record at Level 1 (or 2, 3). If you just do the normal publishing PeopleCode, you get as many messages as there are records at that level (because the code fires for each record).

To make sure the code fires only once, use the following code.

```
/*NAMES.EMPLID.WORKFLOW */  
Local Message &MSG;  
Local Rowset &RS;  
  
&LEVEL = CurrentLevelNumber();  
&CURRENT_ROW = CurrentRowNumber(&LEVEL);  
&TOT_ROW = ActiveRowCount(EMPLID);  
/* Only Publish the message once for all records on */  
/* this level */  
If &CURRENT_ROW = &TOT_ROW Then  
    &MSG = CreateMessage(OPERATION.NAMES);
```

```
&RS = GetRowset();  
&MSG.CopyRowsetDelta(&RS);  
&MSG.Publish();  
End-If;
```

Related Topics

- [Publish method: IntBroker class](#)
- [IsActive property: Message class](#)
- [InBoundPublish method: Message class](#)
- Integration Broker: Creating Message Definitions
- PeopleCode Language Reference: InboundPublishXmlDoc function

SegmentRestart method: Message class

Syntax

```
SegmentRestart(TransactionID, Segment_index, segmentByDB)
```

Description

Use the SegmentRestart method to restart a message segment. This is used only in a Application Engine program, and only if check point logic is used.

Parameters

Parameter	Description
<i>Transaction_ID</i>	Specify the transaction ID of the message you want to restart.
<i>Segment_Index</i>	Specify the number of the segment that you want to restart.
<i>SegmentByDB</i>	Specify the segments by database.

Returns

None.

Related Topics

- [DeleteOrphanedSegments method: IntBroker class](#)
- Integration Broker: Understanding Message Segments

SetContentString method: Message class

Syntax

```
SetContentString(string)
```

Description

Use this method to set the content for the message segment for a non-rowset-based message only.

Note

An error will occur if `SetContentString` is used with other message types, such as rowset-based messages, document-based messages, and so on.

Parameters

Parameter	Description
<i>string</i>	Specifies the content of the message segment.

Returns

A Boolean value: True if the message segment was updated, False otherwise.

Example

```
Local Message &MSG;  
Local Document &DOC;  
Local Compound &COM, &COM1;  
  
&MSG = CreateMessage(Message.QE_WEATHERSTATION_POST);  
  
&DOC = &MSG.GetURIDocument();  
  
&COM = &DOC.DocumentElement;  
  
&COM.GetPropertyByName("state").Value = "Washington";  
&COM.GetPropertyByName("city").Value = "Redmond";  
&COM.GetPropertyByName("day").Value = "today";  
&COM.GetPropertyByName("week").Value = "first";  
&COM.GetPropertyByName("year").Value = "2010";  
&COM.GetPropertyByName("country").Value = "USA";  
  
&MSG.URIResourceIndex = QE_FLIGHTDATA.QE_ACNUMBER;  
  
&DOC = CreateDocument("Weather", "WeatherData", "v1");  
&COM1 = &DOC.DocumentElement;  
&COM1.GetPropertyByName("city").Value = "Troutlake";  
&STR1 = %IntBroker.GetURL("WEATHERSTATION_DATA", 2, &DOC);  
  
&strHTML = GetHTMLText(HTML.WEATHER_CITIES, &STR1);  
&bRet = &MSG.SetContentString(&strHTML);
```

Related Topics

- [GetContentString method: Message class](#)

SetEditTable method: Message class

Syntax

```
SetEditTable(%PromptField, RECORD.recordname)
```

Description

The SetEditTable method works with the ExecuteEdits method. It is used to set the value of a field on a record that has its prompt table defined as %PromptField value. %PromptField values are used to dynamically change the prompt record for a field.

There are several steps to setting up a field so that you can dynamically change its prompt table.

To set up a field with a dynamic prompt table:

1. Define a field in the DERIVED record called *fieldname*.
2. In the record definition for the field that you want to have a dynamic prompt table, define the prompt table for the field as %PromptField, where *PromptField* is the name of the field that you created in the DERIVED record.
3. Use SetEditTable to dynamically set the prompt table.

%PromptField is the name of the field on the DERIVED work record. RECORD.recordname is the name of the record to be used as the prompt table.

```
&MSG.SetEditTable("%EDITTABLE1", Record.DEPARTMENT);  
&MSG.SetEditTable("%EDITTABLE2", Record.JOB_ID);  
&MSG.SetEditTable("%EDITTABLE3", Record.EMPL_DATA);  
&MSG.ExecuteEdits();
```

Every field on a record that has the prompt table field %EDITTABLE1 will have the same prompt table, such as, DEPARTMENT.

Parameters

Parameter	Description
%PromptField	Specifies the name of the field in the DERIVED record that has been defined as the prompt table for a field in a record definition.
RECORD.recordname	Specifies the name of the record definition that contains the correct standard system edits to be performed for that field in the message.

Returns

None.

Related Topics

- [ExecuteEdits method: Message class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)

- [MessageSetNumber property: Field class](#)
- [IsEditError property: Record class](#)
- [SetEditTable method: Record class](#)
- Application Designer Developer's Guide: Creating New Record Definitions

SetJsonObject method: Message class

Syntax

SetJsonObject(*&json*)

Description

Use the SetJsonObject method to load a nonrowset-based message with data from an JSON object.

Note

This method can only be used for nonrowset-based message. If you use this method with a rowset-based message an error message is returned.

Parameters

Parameter	Description
<i>&json</i>	Specify an already instantiated, populated JSON object.

Returns

None.

Example

```
&MSG = CreateMessage(Message.FLIGHTINFORMATION_CONSUME_POST);

&DOC = &MSG.GetURIDocument();
&COM = &DOC.DocumentElement;

&COM.GetPropertyByName("state").Value = "Washington";
&COM.GetPropertyByName("city").Value = "Redmond";
&MSG.URIResourceIndex = 1;
&bRet = &MSG.IBInfo.LoadRESTHeaders();

&jReqObj = CreateJsonObject();

&jOutArray = CreateJsonArray();
&jOutArray.AddElement("flight cold");
&jOutArray.AddElement("flight hot");
&jOutArray.AddElement("flight just right");
```

```
&jReqObj.AddProperty("version", "1.0");  
&jReqObj.AddProperty("title", "list of flight info");  
&jReqObj.AddProperty("flight", &jOutArray);  
  
&MSG.SetJsonObject(&jReqObj);  
  
&return_mesage = %IntBroker.SyncRequest(&MSG);
```

Related Topics

- [GetJsonObject method: Message class](#)

SetQueryString method: Message class

Syntax

```
SetQueryString(Parameter_Name, Value)
```

Description

Use the SetQueryString method to add a parameter value to the query string.

Note

This method has been desupported and remains for backward compatibility only. Use the IBCConnectorInfo class AddQueryStringArg method instead.

Parameters

Parameter	Description
<i>Parameter_Name</i>	Specify the name of the parameter that you want to add to the query string, as a string.
<i>Value</i>	Specify the value of the parameter you are adding to the query string.

Returns

None.

Example

```
Local Message &request;  
&request = CreateMessage(OPERATION.QE_SALES_ORDER);  
. . .  
  
. . .  
  
&request.SetQueryString("BUYER", "12345");
```

Related Topics

- [AddQueryStringArg method: ConnectorInfo collection](#)

- [AddQueryStringArg method: ConnectorInfo collection](#)
- [GetQueryString method: Message class](#)

SetRESTCache method: Message class

Syntax

SetRESTCache(*&futureDT*)

Description

Use the SetRESTCache method to set server-side caching for provider REST GET service operations the OnRequest PeopleCode event. When you set server-side caching, the system caches the entire transactional data for the *specific URI resource*. Subsequent requests from a client with an identical resource will result in the data being pulled from the cache. The cache expires on the date and time specified by the *&futureDT* parameter.

You can delete the cache at any time by calling the DeleteRESTCache method.

Parameters

Parameter	Description
<i>&futureDT</i>	Specifies a future date and time as a DateTime variable.

Returns

None.

Example

```
Local Message &MSG;  
Local datetime &dt;  
Local string &op, &ver;  
  
&MSG.SetRESTCache(&dt);  
  
&b_ret = %IntBroker.DeleteRESTCache(&op, &ver);
```

Related Topics

- [DeleteRESTCache method: IntBroker class](#)

SetStatus method: Message class

Syntax

SetStatus(*Status*)

Description

Use the SetStatus method to set the status of a publication or subscription contract, much the same way you do in the message monitor.

Note

This method has been desupported and remains for backward compatibility only. Use the `IntBroker` class `SetStatus` method instead.

You may want to use this method after an end-user has finished fixing any errors in the message data.

You can set the status of a contract to one of the following statuses:

- Cancel
- Done
- Error
- New

The method is available only when the message instance has one of the following statuses:

- Cancel
- Done
- Error
- New

Parameters

Parameter	Description
<i>Status</i>	Specify the status that you want to set the message to. Value are: • %Message_Error • %Message_New • %Message_Done • %Message_Started • %Message_Working • %Message_Retry • %Message_Timeout • %Message_Edited • %Message_Canceled

Returns

None.

Related Topics

- [SetStatus method: IntBroker class](#)
- Integration Broker: Creating Message Definitions

SetXmlDoc method: Message class

Syntax

```
SetXmlDoc(&XmlDoc)
```

Description

Use the SetXmlDoc method to load a nonrowset-based message with data from an XmlDoc object.

Note

This method can only be used for nonrowset-based message. If you use this method with a rowset-based message an error message is returned.

Parameters

Parameter	Description
<i>&XmlDoc</i>	Specify an already instantiated, populated XmlDoc object.

Returns

None.

Considerations Using SetXmlDoc

In order to wrap non-XML data in cdata wraps as part of a message that would be automatically removed when posted to the gateway, the following cdata wraps are supported:

- `<?xml version="1.0"?> <data PsNonXml="Yes"><![CDATA..`
- `<?xml version="1.0"?> <data psnonxml="Yes"><![CDATA..`
- `<?xml version="1.0"?><add_some_root_tag> <data PsNonXml="Yes"><![CDATA...`
- `<?xml version="1.0"?><add_some_root_tag> <data psnonxml="Yes"><![CDATA...`

Related Topics

- [GetXmlDoc method: Message class](#)
- [Understanding XmlDoc Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDoc class is used to create and manipulate XML data.

SyncRequest method: Message class

Syntax

```
SyncRequest([NodeName])
```

Description

Use the SyncRequest method to send a synchronous message for the default message version.

Note

This method has been desupported and remains for backward compatibility only. Use the IntBroker class SyncRequest method instead.

Use the IsActive property to determine if a message is active or not before using this method.

This method sends a single message synchronously, that is a reply message is returned as a result of this method.

If you want to publish a message asynchronously, use the Publish method.

If you want to publish more than one message at a time synchronously, use the IntBroker SyncRequest method.

Note

This method supports nonrowset-based messages only if the SetXmlDoc method is used to populate the message prior to using the SyncRequest method.

The SyncRequest method can be called from any PeopleCode event, but is generally called from an Application Engine PeopleCode step or from a component.

When sending a synchronous request from a component, you should send messages only from the SavePostChange event, either from record field or component PeopleCode. This way, if there's an error in your SyncRequest code, the data isn't committed to the database. Also, since SavePostChange is the last Save event fired, you avoid locking the database while the other save processing is happening.

If the message is successfully sent, a response message is returned. In addition, the GUID property is updated with a unique identifier.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of the node that you want to send this message to.

Returns

A response message.

Example

```
Local Message &request, &response;  
Local Rowset &sales_order;
```

```
&sales_order = GetLevel0();  
&request = CreateMessage(OPERATION.QE_SALES_ORDER);  
&request.CopyRowsetDelta(&sales_order);  
&response = &request.SyncRequest();  
If (&response.ResponseStatus = 0) Then  
    /* do processing */  
End-If;
```

Related Topics

- [SyncRequest method: IntBroker class](#)
- [Publish method: Message class](#)
- [SyncRequest method: IntBroker class](#)

Update method: Message class

Syntax

```
Update([versionlist])
```

where *versionlist* is an arbitrary list of message versions in the following format:

```
version1 [, version2] . . .
```

Description

The Update method updates a message in the message queue with the specified message versions.

Note

This method has been desupported and remains for backward compatibility only. Use the IntBroker class Update method instead.

If *versionlist* isn't specified, the default message version is used. This method is commonly used in the OnRouteSend and OnRouteReceive PeopleCode events.

Note

This method does not support nonrowset-based messages. The Update method can't be called from notification PeopleCode.

Parameters

Parameter	Description
<i>versionlist</i>	Specify an optional comma-separated list of message versions. If <i>versionlist</i> isn't specified, the default message version is used.

Returns

None.

Related Topics

- [Update method: IntBroker class](#)
- [GetRowset method: Message class](#)
- Integration Broker: Creating Message Definitions

UpdateSegment method: Message class

Syntax

```
UpdateSegment ( )
```

Description

Use the UpdateSegment method to update the current segment with data from the message. This method is used only when creating a message for publication, not after a message has been published.

Note

You should use DeleteSegment and UpdateSegment only when writing to memory, or when SegmentsByDatabase is set to False. These methods do not work when writing to the database, or when SegmentsByDatabase is set to True.

Parameters

None.

Returns

None.

Related Topics

- [CreateNextSegment method: Message class](#)
- [DeleteSegment method: Message class](#)
- [CurrentSegment property: Message class](#)
- [SegmentCount property: Message class](#)

Message Class Properties

In this section, we discuss the Message class properties. The properties are discussed in alphabetical order.

ActionName property: Message class

Description

This property returns the name of the action associated with the message, as a string.

This property is read-only.

AliasName property: Message class

Description

This property returns the name of the alias associated with the message part executing the property.

This property is read-only.

Related Topics

- [GetPartAliasName method: Message class](#)
- Integration Broker: Specifying Record Aliases

ChannelName property: Message class

Description

This property references the name of the channel associated with the message definition.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class QueueName property instead.

See [QueueName property: Message class](#).

This property is set when the message is created. The message instance keys are a subset of the publication and subscription contract keys. This property is one of the message instance keys: the others are PubID and PubNodeName for asynchronous messages, GUID and PubNodeName for synchronous messages.

This property is valid for both synchronous and asynchronous messages.

This property is read-only.

Example

```
&CHANNEL = &MSG.ChannelName
```

Related Topics

- Integration Broker: Creating Message Definitions

Cookies property: Message class

Description

This property returns or sets the cookies associated with a message.

Note

This property has been desupported and remains for backward compatibility only. Use the `IBInfo` class `Cookies` property instead.

See [Cookies property: ConnectorInfo collection](#).

You can accept a synchronous response message containing cookies, save those cookies in a global variable, and later return them to the target node in an outbound synchronous or asynchronous request message.

You can access this property only in an inbound synchronous response message or an outbound request message.

This property is read/write.

Example

The following is an example of receiving cookies:

```
Local Message &SalesRequest, &SalesResponse;
Local Rowset &SALES_ORDER;
Global string &SalesCookies;

&SALES_ORDER = GetLevel0();
&SalesRequest = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);

/* send the synchronous request; the return value is */
/* the response message object */
&SalesResponse = &SalesRequest.SyncRequest();

/* Retrieve cookies from the response message */
&SalesCookies = &SalesResponse.Cookies;
```

The following is an example of returning cookies:

```
Local Message &SalesRequest, &SalesResponse;
Local Rowset &SALES_ORDER;
Global string &SalesCookies;

&SALES_ORDER = GetLevel0();
&SalesRequest = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);

/* Insert the cookies in the request message */
&SalesRequest.Cookies = &SalesCookies;
```

```
/* Send the asynchronous request */  
&SalesRequest.Publish();
```

CurrentSegment property: Message class

Description

This property returns a number, indicating which segment is the current segment.

This property is read-only.

DefaultMessageVersion property: Message class

Description

This property returns the default version of the message as a string.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class OperationVersion property instead.

See [OperationVersion property: Message class](#).

This is the message version from the pub/sub contract, not the default message version of the message defined in the current system.

This property is valid for both synchronous and asynchronous messages.

This property is read-only.

Example

```
Local Message &MSG;  
Local String &VER;  
  
&MSG = %IntBroker.GetMessage();  
&VER = &MSG.DefaultMessageVersion;
```

DoNotPubToNodeName property: Message class

Description

Use this property to set the node name of a node that you do not want to publish this message to. For example, a single node may publish and subscribe to the same message. You can use this property to prevent the system from subscribing to the same message it publishes. This can help prevent circular processing where the original publisher eventually receives the same message.

This property is only valid for asynchronous messages.

This property is read/write.

Example

```
&MSG.DoNotPubToNodeName = &MSG.PubNodeName;  
&MSG.Publish();
```

GUID property: Message class

Description

This property returns a string representing a global unique identifier generated when the message was sent.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class TransactionId property instead.

See [OperationVersion property: Message class](#).

This property returns the unique identifier used with the message.

This property is valid only for synchronous messages.

This property is read-only.

Example

```
Local Message &request;  
Local String &guid;  
  
&request = %IntBroker.GetMessage();  
  
&guid = &request.GUID;
```

HTTPMethod property: Message class

Description

Use this property to return an integer constant representing the HTTP request method that was specified by the subscribing node (the consumer) in REST-based service operations. The request method determines the proper response message to send.

Value	Description
%IntBroker_HTTP_GET	HTTP GET method – Requests a representation of a resource.
%IntBroker_HTTP_POST	HTTP POST method – Submits data to be processed to the specified resource. This might result in the creation of a new resource or updates to an existing resource or both.

Value	Description
%IntBroker_HTTP_DELETE	HTTP DELETE method – Deletes the specified resource.
%IntBroker_HTTP_PUT	HTTP PUT method – Uploads a representation of the specified resource. This might result in the creation of a new resource or updates to an existing resource or both.
%IntBroker_HTTP_HEAD	HTTP HEAD method – Requests a representation of a resource without the response body that would be returned in a GET request.

This property is read-only.

Example

```
If &MSG.HTTPMethod = %IntBroker_HTTP_POST Then
    /* populate the POST response data */
End-If;

If &MSG.HTTPMethod = %IntBroker_HTTP_GET Then
    /* populate the GET response data */
End-If;
```

HTTPResponseCode property: Message class

Description

Use this property to return the HTTP response code for the transaction as an integer.

This property is read-only.

Example

```
&return_msg = %IntBroker.SyncRequest(&MSG);
If &return_msg.ResponseStatus = %IB_Status_Success Then
    &nRET = &return_msg.HTTPResponseCode;
End-If;
```

IBException property: Message class

Description

Use the IBException property to return a reference to an exception object. The object is populated with information about the integration broker error.

This property is read-only.

Related Topics

- [Understanding Exception Class](#)
An *exception* can be defined as any unusual event that requires special handling in your PeopleCode program. This could include some kind of hardware failure, such as trying to

write to a printer that's been turned off, or a software failure, such as trying to divide by zero. You can also detect your own errors, and use the `Throw` statement to construct an exception.

IBInfo property: Message class

Description

Use this property to return a reference to an `IBInfo` object.

This property is read-only.

InitializeConversationId property: Message class

Description

Use this property to set or return a Boolean value indicating whether this is the first of a set of correlated messages. On the first message to be published, set the `InitializeConversationId` property to `True`. After the message is published, retrieve the transaction ID from the message. This transaction ID should be used to set the conversation ID (that is, the correlation ID) for all subsequent messages to be published.

This property is read/write.

Related Topics

- [FirstCorrelation method: Message class](#)
- [TransactionId property: Message class](#)
- [ConversationID property: IBInfo class](#)
- Integration Broker Administration: Using the `OnPreNotify` and `OnPostNotify` PeopleCode Events

IsActive property: Message class

Description

Indicates whether the message definition has been set to inactive.

Note

This property has been desupported and remains for backward compatibility only. Use the `Message class IsOperationActive` property instead.

See [IsOperationActive property: Message class](#).

This property is `True` if the message definition is active, `False` if it's been inactivated. If you have a lot of PeopleCode associated with publishing a message, you might use this property to check if the message is active before you publish it.

This property is valid for both asynchronous and synchronous messages.

This property is read-only.

Example

```
&MSG = CreateMessage(OPERATION.MY_MESSAGE)
If &MSG.IsActive Then
    /* do PeopleCode processing */
    &MSG.Publish();
Else
    /* do other processing */
End-if;
```

Related Topics

- [Integration Broker: Creating Message Definitions](#)
- [PeopleCode Language Reference: IsMessageActive function](#)

IsBulkLoadTruncation property: Message class

Description

Use this property to return a Boolean value indicating whether the table truncation option has been selected on the bulk loader handler.

This property is read-only.

Example

```
If &MSG.IsBulkLoadTruncation = False Then
    /* then any truncation of tables would have to be performed here */
End-If;
```

Related Topics

- [Integration Broker: Implementing Handlers Using Bulk Load Processing](#)

IsDelta property: Message class

Description

This property indicates if any fields in a message populated from page data have been changed since they were first loaded into the component buffer.

This is generally used in the following scenario:

You want to publish a message only if the end-user has changed a value on a page. The problem is that if the end-user makes a change to a field in the level three rowset, the `IsChanged` property for the top level row remains `False`. If the rowset is large, and you don't want to iterate through it to find a single `IsChanged`, you can use this property to quickly determine if something has changed at a lower level and the message should be published.

Note

This property should be used only when the message and the component do not have the same structure (that is, the same records at the same levels). If the message and the component have the same structure use the `CopyRowsetDelta` method instead.

This property takes a Boolean value: True if there are changed fields in the message, False otherwise.

This property is valid for both asynchronous and synchronous messages.

This property is read-only.

Example

```
&Msg = CreateMessage(OPERATION.MY_MESSAGE);
&Msg_Rowset = &Msg.GetRowset(); /* get first level in Msg RS */
&Msg_Detail = &Msg_Rowset(1).GetRowset(); /* get detail in Msg */
&Page_Rowset = GetRowset(); /* get page */
For &I = &Page_Rowset.RowCount
    &Page_Detail = &Page_Rowset.GetRow(&I).GetRowset();
    &Msg_Detail.CopyRowset(&Page_Detail);
End-For;
/* Find if any data changed and should publish message */
If &Msg.IsDelta Then
    &Msg.Publish();
Else
    /* don't publish message and do other processing */
End-If;
```

Related Topics

- [CopyRowsetDelta method: Message class](#)

IsEditError property: Message class

Description

This property is True if an error has been found on any field in any record of the current message after executing the `ExecuteEdits` method on either a message object or a record object. This property can be used with the Field Class properties `MessageSetNumber` and `MessageNumber` to find the error message set number and error message number.

You can use this property in notification PeopleCode with the `Exit` function with a value of 1. This automatically rolls back any changes that were made to the database, saves the message errors to the message queue, and marks the message status as ERROR.

This property is valid for both asynchronous and synchronous messages.

This property is read-only.

Example

```
&MSG = %IntBroker.GetMessage();
&Rowset = &MSG.GetRowset();
```

```
&MSG.ExecuteEdits();  
If &MSG.IsEditError Then  
    Exit(1);  
End-If;
```

Related Topics

- [ExecuteEdits method: Message class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)
- PeopleCode Language Reference: Exit function
- Integration Broker: Processing Inbound Errors

IsLocal property: Message class

Description

This property is True if the message object that was just instantiated was published locally. This property takes a Boolean value.

This property is valid for both asynchronous and synchronous messages.

This property is read-only.

Example

```
&MSG = %IntBroker.GetMessage();  
If &MSG.IsLocal Then /* LOCAL NODE */  
    /* do processing specific to local node */  
Else  
    /* do processing specific to remote nodes */  
End-If;
```

IsOperationActive property: Message class

Description

Use the IsOperationActive property to determine if an operation is active or not.

This property returns a Boolean value: true if the operation is still active, false otherwise.

This property is read-only.

Related Topics

- Integration Broker: Creating Message Definitions

IsParts property: Message class

Description

Use the IsParts property to determine if the message is a container message, that is, composed of parts.

This property only determines if a message is a container message. If you'd like to know if the message is a rowset-based message with parts, use the `IsPartsStructured` property instead.

This property returns a Boolean value: true if the message executing the property is a container message, false otherwise.

This property is read-only.

Related Topics

- [IsPartsStructured property: Message class](#)

IsPartsStructured property: Message class

Description

Use the `IsPartsStructured` property to determine if the message is a container message, that is, composed of parts, as well as a rowset-based message.

This property determines if a message is a container message as well as rowset-based. If you only want to know if the message is a container message, use the `IsParts` property instead.

This property returns a Boolean value: true if the message executing the property is a container message that is rowset-based, false otherwise.

This property is read-only.

Related Topics

- [IsParts property: Message class](#)

IsRequest property: Message class

Description

Use the `IsRequest` property to determine whether a message is a request message (as opposed to a response message.)

This property returns a Boolean value: true if the message object executing the property is a request message, false otherwise.

This property is read-only.

IsSourceNodeExternal property: Message class

Description

Use the `IsSourceNodeExternal` property to determine whether the message came from an internal system or a third-party system.

This property returns a Boolean value: true if the message originated from a third-party system, false otherwise.

This property is read-only.

IsStructure property: Message class

Description

This property indicates whether the message is rowset-based, that is, based on a rowset, or nonrowset-based that is, based on an XmlDocument. This property returns a Boolean value, true if the message is rowset-based, false otherwise.

This property is read-only.

MessageDetail property: Message class

Description

This property specifies the message detail, as a string. The message detail can be used to further identify a message.

Note

This property has been desupported. It is no longer supported.

Name property: Message class

Description

This property returns the name of the message as a string.

This property is valid with both asynchronous and synchronous messages.

This property is read-only.

NRId property: Message class

Description

This property returns the non-repudiation ID as a string. This property is populated with a unique string when the message is published.

This property is only valid with messages that use non-repudiation.

This property is read-only.

Related Topics

- [Integration Broker Administration: Implementing Nonrepudiation](#)

OperationName property: Message class

Description

Use the OperationName property to return the name of the operation associated with the message object executing the property, as a string.

This property is read-only.

OperationVersion property: Message class

Description

Use the OperationVersion property to determine version for the operation associated with the message object executing the property, as a string.

This property is read-only.

ParentTransactionId property: Message class

Description

Use the ParentTransactionId property to return the parent transaction ID, that is, the ID that is generated with the original request message from a third-party system.

This property is read-only.

Related Topics

- [TransactionId property: Message class](#)

PartCount property: Message class

Syntax

Use the PartCount property to determine the number of parts in a container message. This property is only valid with container messages. You will receive an error if you try to use it on a message that isn't a container message.

This property is read-only.

PubID property: Message class

Description

This property refers to the publication identifier, which is a number.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class QueueSeqId property instead.

See [QueueSeqId property: Message class](#).

It's generated for asynchronous messages when the message is published, and is sequential, based on the number of messages published for that channel. The message instance keys are a subset of the publication and subscription contract keys. This property is one of the message instance keys: the others are ChannelName and PubNodeName.

Note

The PubID property is not populated when the message is published from a notification.

This property is valid only with asynchronous messages.

This property is read-only.

Example

```
&MSG.Publish();  
&PUBID = &MSG.PubID;
```

PubNodeName property: Message class

Description

This property refers to a string that contains the name of the publishing node. It is generated by the system when the message is published. The message instance keys are a subset of the publication and subscription contract keys.

This property is valid for both asynchronous and synchronous messages.

For a synchronous message, this property returns the name of the requesting node.

This property is read-only.

Example

```
&MSG = %IntBroker.GetMessage();  
&PUBNODE = &MSG.PubNodeName;
```

QueueName property: Message class

Description

Use the QueueName property to return the name of the queue associated with the message.

This property is read-only.

Related Topics

- [Integration Broker: Understanding Service Operation Queues](#)

QueueSeqId property: Message class

Description

Use the QueueSeqId property to return the sequence number of the message in the message queue.

This property is read-only.

ResponseStatus property: Message class

Description

This property is valid only for the returned response message from a synchronous request message.

This property indicates whether a response was successful or not.

Note

This is not the same as SetStatus, which is used only with the message monitor.

This property returns a numeric value: 0, the response was successful, any other number indicates an error.

This property is read-only.

ReUseTransactionId property: Message class

Description

To use the ReUseTransactionId property to set the TransactionId to an already published synchronous message for SyncRequests only. This can be used when the previous SyncRequest fails due to a timeout condition. The same transaction (same TransactionId) can then be resent via a SyncRequest to the receiving system. The receiving system can check if already processed (send back a duplicate error) or process the message. Note: When used all previous transaction information logging (header, detail, error) will be deleted prior to sending out the SyncRequest.

This property is write-only.

Example

```
&msg.ReUseTransactionId = "ac7db3ef-e0ea-11f0-8ff3-ad601dc22698";  
&msg_response = %IntBroker.SyncRequest(&msg);
```

Related Topics

- [Integration Broker: Creating Message Definitions](#)

SegmentContentTransfer property: Message class

Description

Use this property to set or return a string constant indicating whether the message segment is binary or text data:

Value	Description
%ContentTransfer_Binary	Transfer this segment as binary data. Note: Any binary data must be encoded as text, which increases its size by up to 33%.
%ContentTransfer_Default	Transfer this segment as text data.

The HTTP target connector has a property called MTOM. When this property is set to Y, the transaction uses the Message Transmission Optimization Mechanism (MTOM) protocol for message transmission, which is more efficient for binary attachments.

This property is read/write.

Example

```
Local Message &MSG;

&MSG = CreateMessage(Message.FLIGHTDATA);

&MSG.SetXmlDoc(&xmldoc);

&MSG.CreateNextSegment();
&bRet = &MSG.SetContentString("your encoded image data here");
&MSG.SegmentContentType = "image/gif";
&MSG.SegmentContentTransfer = %ContentTransfer_Binary;

&MSG.CreateNextSegment();
&bRet = &MSG.SetContentString("your encoded video here");
&MSG.SegmentContentType = "video/mp4";
&MSG.SegmentContentTransfer = %ContentTransfer_Binary;

%IntBroker.Publish(&MSG);
```

Related Topics

- [SetContentString method: Message class](#)
- [SegmentContentType property: Message class](#)
- Integration Broker: Sending and Receiving Binary Data

SegmentContentType property: Message class

Description

Use this property to set or return a string representing the content (or MIME) type for the message segment—for example, application/pdf. This property is read/write.

Example

```
&MSG.SegmentContentType = "video/mp4";
```

Related Topics

- [SetContentString method: Message class](#)

- [SegmentContentTransfer property: Message class](#)
- Integration Broker: Sending and Receiving Binary Data

SegmentCount property: Message class

Description

This property returns the total number of segments for the message.

This property is read-only.

SegmentsByDatabase property: Message class

Description

Use this property to specify whether segments are stored in memory while being processed.

If you specify SegmentsByDatabase as false, you can only have the number of segments as specified in PSADMIN (Message Segment From DB). If you specify this property as true, you can have as many segments as you need.

The SegmentsByDatabase property also specifies whether the segments are kept in memory or written to the database when they are received. If you specify true, the segments are automatically written to the database. If you specify false, the segments are held in memory. If you specify true, then cancel out of the program processing the segments, the changes are not committed to the database.

This property is automatically set to true for message segments being processed using a Application Engine program.

This property is read/write.

Related Topics

- [Message Segments](#)
To make processing more efficient, you can divide a large message into pieces using message segments. Generally, you only divide asynchronous messages into segments.
- [SegmentsUnOrder property: IBIInfo class](#)

Size property: Message class

Description

The Size property is the approximate size of the uncompressed XML data generated when the message is published. The availability and meaning of the Size property depends on the message type as follows:

- For rowset-based message parts, the Size property is available and based on the estimated XML size.
- For non-rowset-based messages, the Size property is available and based on the XML data size.
- For container-based messages, the Size property is available on received messages only—that is for OnRequest or OnNotify PeopleCode events.
- For container-based message parts, the Size property is available and based on the estimated XML size.

- For document-based messages, the Size property is available and based on the XML data size.

The size is approximate for the following reasons:

- The maximum size of fields is used except for the case of long text and image fields.
- The active row count is used, without regard to whether the rows have been changed. In a CopyRowsetDelta, rows that are not changed, are not published.
- It doesn't include the size of the XML tags.

This property can be used with the system property %MaxMessageSize in a batch Application Engine program to prevent the application from publishing a message that is too large.

This property is valid for both asynchronous and synchronous messages.

This property is read-only.

Example

```
If &MSG.Size > %MaxMessageSize Then
    &MSG.Publish();
Else
    /*Move more data into the message object */
End-If;
```

Related Topics

- PeopleCode Language Reference: %MaxMessageSize system variable
- Integration Broker: Understanding Sending and Receiving Messages

SubName property: Message class

Description

This property refers to a string that contains the name of the notification process currently processing the message.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class ActionName property instead.

See [ActionName property: Message class](#).

It is available only when GetMessage is used in a notification PeopleCode program.

This property is only valid for asynchronous messages.

This property is read-only.

Example

```
&MSG = %IntBroker.GetMessage();
&SUBNAME = &MSG.SubName
```

SubQueueName property: Message class

Description

Use the SubQueueName to return or specify the name of the sub-queue associated with the message, as a string.

This property is read/write.

Related Topics

- [Integration Broker: Understanding Service Operation Queues](#)

SubscriptionProcessId property: Message class

Description

This property returns a string containing the subscription process identifier. This is a unique sequential number.

Note

This property has been desupported and remains for backward compatibility only. Use the Message class TransactionId property instead.

See [TransactionId property: Message class](#).

This property is populated only if the “Generate Subscription Process Instance” option is turned on in the Subscription Process definition.

The subscription process identifier corresponds to the subscription process instance, not the message instance. If there are multiple subscription processes for the same message each subscription process will have a different, unique ID.

If the subscription process terminated abnormally, its process instance is lost, and a new one is generated on the next retry (that is, there will be a gap in the sequence.)

This property is valid only for asynchronous messages.

This property is read-only.

Considerations for Using SubscriptionProcessId

Consider the following when using SubscriptionProcessId:

- Using the **Run PeopleCode** option from Message Subscription does not generate the number. It is generated only if the Application Server is running the PeopleCode.
- If for some reason you have to rerun the subscription, a new number is assigned.
- Because generating the number is optional, your program must contain code to support the option being turned off. Here is a code example from ITEM_SYNC:

```
If All(&MSG.SubscriptionProcessId) Then
    &EIP_CTL_ID = Generate_EIP_CTL_ID(4, &MSG.SubscriptionProcessId);
Else
```

```
&EIP_CTL_ID = Generate_EIP_CTL_ID(1, "Random");  
End-If;
```

- If the flag is off, this property is blank. In this case, you may want to adopt a standard for generating a random number, as shown in the previous example.

Related Topics

- [Integration Broker: Understanding Sending and Receiving Messages](#)

TransactionId property: Message class

Description

Use the TransactionId property to return the transaction ID for an already published message, as a string. This is a unique transaction identifier for the message.

This property is read-only.

URIResourceIndex property: Message class

Description

Use this property to set or return the index for the URI as an integer. This index corresponds to the row number in the URI grid of the REST Resource Definition section of the service operation definition.

This property is read/write.

Example

```
&MSG = CreateMessage(Message.WEATHERSTATION_GET);  
&DOC = &MSG.GetURIDocument();  
&COM = &DOC.DocumentElement;  
  
&COM.GetPropertyByName("state").Value = "Washington";  
&COM.GetPropertyByName("city").Value = "Redmond";  
&COM.GetPropertyByName("day").Value = "today";  
&COM.GetPropertyByName("week").Value = "first";  
&COM.GetPropertyByName("year").Value = "2010";  
&COM.GetPropertyByName("country").Value = "USA";  
&MSG.URIResourceIndex = 1;
```

Related Topics

- [SegmentContentType property: Message class](#)
- [Integration Broker: REST Resource Definitions](#)

Version property: Message class

Description

Use the Version property to determine the version of the message executing the property, as a string.

This property is read-only.

IntBroker Class

An IntBroker object is returned from the system variable %IntBroker.

IntBroker Class Methods

In the following section, we discuss the IntBroker class methods. The methods are described in alphabetical order.

Cancel method: IntBroker class

Syntax

```
Cancel(TransactionId, QueueName, DataType, SegmentIndex | TransactionIdArray,  
QueueNameArray, DataTypeArray, SegmentIndexArray)
```

Description

Use the Cancel method to programmatically cancel either a message, or a list of messages, from the message queue, much the same as you can do in the message monitor.

This method is only available when the message has one of the following statuses:

- Edited
- Error
- New
- Retry
- Timeout

If you are specifying an array of messages to be canceled, and any message in the array fails for any reason (for example, you specify a message that doesn't have the correct status) no messages are canceled and the method return value is false.

Parameters

Parameter	Description
<i>TransactionId</i> <i>TransactionIdArray</i>	Specify either a single transaction ID as a string, or specify an array of string containing the transaction IDs of the messages you want to cancel.
<i>QueueName</i> <i>QueueNameArray</i>	Specify either a single queue name as a string, or specify an array of string containing the queue names that contain the messages you want to cancel.
<i>DataType</i> <i>DataTypeArray</i>	Specify either a single data type, or an array of integer containing the data types. See below for valid data types.
<i>SegmentIndex</i> <i>SegmentIndexArray</i>	Specify either a specific segment, or an array of integer containing the segment numbers you want to cancel.

For the *DataType* or *DataTypeArray* parameters, the valid data types are:

Constant Value	Description
%IntBroker_BRK	Cancel the message for the web services gateway.
%IntBroker_PUB	Cancel the message for the publication contract.
%IntBroker_SUB	Cancel the message for the subscription contract.

Returns

A Boolean value: true if the message or messages are canceled successfully, false otherwise.

Related Topics

- [Resubmit method: IntBroker class](#)

ConnectorRequest method: IntBroker class

Syntax

```
ConnectorRequest(&Message[, process_exceptions])
```

Description

Use the ConnectorRequest method to return a response message from the connector based on the message passed in.

You would only use this method after you had set the connector information.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated message object to return a response message from the connector.
<i>process_exceptions</i>	Specifies a Boolean value indicating whether the PeopleCode program will process exceptions. Important: When this parameter is set to True, your program must read the response status property of the response message to determine if the call was successful. If there is an exception, then interrogate the IBException object within the Message object to get the details of the exception.

Returns

A Message object.

Example

```
Local string &nonXmlData = "<?xml version=""1.0""?><data  
psnonxml=""yes""><!=  
[CDATA[" | &encoded | "]]></data>";  
&soapMsg = CreateXmlDoc(&nonXmlData);  
&reqMsg.SetXmlDoc(&soapMsg);  
Local Message &respMsg;  
%This.SetConnectorProperties(&reqMsg, &url);  
&respMsg = %IntBroker.ConnectorRequest(&reqMsg);  
If &respMsg = Null Then /* Throw exception */  
%This.HandleNullSoapResponse(&soapMsg, &url);  
End-If;
```

This second example demonstrates how to evaluate the response message status when *process_exceptions* is True:

```
Local Message &MSG, &resp_MSG;  
  
&resp_MSG = %IntBroker.ConnectorRequest(&MSG, True);  
  
If &resp_MSG.ResponseStatus = %IB_Status_Success Then  
/* Perform processing of a successful response message */  
Else  
/* Read the IBException object for exception specifics */  
&error = &resp_MSG.IBException.ToString();  
End-If;
```

Related Topics

- [ConnectorRequestUrl method: IntBroker class](#)
- [IBException property: Message class](#)

ConnectorRequestUrl method: IntBroker class

Syntax

```
ConnectorRequestUrl(URL)
```

Description

Use the ConnectorRequestUrl method to return the URL for a connector.

You must have already set the connector parameters before executing this command.

Parameters

Parameter	Description
URL	Specify an absolute URL as a string.

Returns

A string.

Example

```
/**
 * Get XML Doc from URL
 *
 * @param String - Location
 * @return XmlDoc - retrieved XmlDoc
 */

method getXmlDocumentFromURL
    /+ &location as String +/
    /+ Returns XmlDoc +/
    Local XmlDoc &xmldoc;
    Local string &xmlstr;
    If Substring(LTrim(RTrim(Upper(&location))), 1, 4) = "HTTP" Then
        &xmlstr = %IntBroker.ConnectorRequestUrl(&location);
    Else
        &xmlstr = %This.getXmlContentFromFile(&location);
    End-If;
    &xmldoc = CreateXmlDoc("");
    If &xmldoc.ParseXmlString(&xmlstr) Then
        Return &xmldoc;
    End-If;
end-method;
```

Related Topics

- [ConnectorRequest method: IntBroker class](#)

DefaultLocalNode method: IntBroker class

Syntax

```
DefaultLocalNode()
```

Description

Use the DefaultLocalNode method to return the name of the default local node on this system.

Parameters

None.

Returns

String.

Example

In a Mobile Application Platform (MAP) application, use this method when generating a link to a classic component or to a fluid component. For example, the following PeopleCode generates a link to a fluid homepage.

```
&URL = GenerateComponentPortalURL(%IntBroker.DefaultPortalName(),  
%IntBroker.DefaultLocalNode(), MenuName.NUI_FRAMEWORK, %MAP_Market,  
Component.PT_LANDINGPAGE, Page.PT_LANDINGPAGE, "U");
```

Related Topics

- [DefaultPortalName method: IntBroker class](#)
- PeopleCode Language Reference: GenerateComponentPortalURL function

DefaultPortalName method: IntBroker class

Syntax

```
DefaultPortalName()
```

Description

Use the DefaultPortalName method to return the name of the default portal on this system.

Parameters

None.

Returns

None.

Example

In a MAP application, use this method when generating a link to a classic component or to a fluid component. For example, the following PeopleCode generates a link to a fluid homepage.

```
&URL = GenerateComponentPortalURL(%IntBroker.DefaultPortalName(),  
%IntBroker.DefaultLocalNode(), MenuName.NUI_FRAMEWORK, %MAP_Market,  
Component.PT_LANDINGPAGE, Page.PT_LANDINGPAGE, "U");
```

Related Topics

- [DefaultLocalNode method: IntBroker class](#)
- PeopleCode Language Reference: GenerateComponentPortalURL function

DeleteLayoutCache method: IntBroker class

Syntax

```
DeleteLayoutCache(MAP_layout)
```

Description

Use this method to delete all cached copies of this Mobile Application Platform (MAP) application.

Parameters

Parameter	Description
<i>MAP_layout</i>	Specifies the name of the MAP application (layout) as a String.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

Use the DeleteLayoutCache method in the OnInitEvent to clear any cached copies of this MAP application:

```
&b = %IntBroker.DeleteLayoutCache("MAP_APP_2");
```

DeleteOrphanedSegments method: IntBroker class

Syntax

DeleteOrphanedSegments(*TransactionId*)

Description

Use the DeleteOrphanedSegments method to delete segments that might have been orphaned if you were processing message segments using a Application Engine program that had to be restarted. Since each segment is committed to the database, if the application engine program is aborted, these segments need to be deleted from the database.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID that identifies the message which contains the segments you want to delete.

Returns

A Boolean value: true if the method completes successfully, false otherwise.

Related Topics

- [SegmentRestart method: Message class](#)
- Integration Broker: Understanding Message Segments

DeleteRESTCache method: IntBroker class

Syntax

```
DeleteRESTCache(service_op, service_op_ver
```

Description

Use the DeleteRESTCache method to delete a server-side REST cache created by the SetRESTCache method.

Parameters

Parameter	Description
<i>service_op</i>	Specifies the Integration Broker service operation as a string.
<i>service_op_ver</i>	Specify the version of the specified operation as a string.

Returns

A Boolean value: True if the cache was deleted successfully, False otherwise.

Example

```
Local Message &MSG;  
Local datetime &dt;  
Local string &op, &ver;  
  
&MSG.SetRESTCache(&dt);  
  
&b_ret = %IntBroker.DeleteRESTCache(&op, &ver);
```

Related Topics

- [SetRESTCache method: Message class](#)

EscapeControlCodes method: IntBroker class

Syntax

```
EscapeControlCodes(string)
```

Description

Use the EscapeControlCodes method to perform the necessary checks and escapes prior to populating the rowset. You can use this method only for the field that could possibly have these control codes.

Parameters

Parameter	Description
<i>string</i>	Specify a string for which you want to add control codes.

Returns

A string with escape control codes.

Example

```
return string = %IntBroker.EscapeControlCodes(string);

local string &myString = "this is a string";
&string = %IntBroker.EscapeControlCodes(&myString);
```

GenLayoutDoc method: IntBroker class

Syntax

```
GenLayoutDoc(layout_name, URI_index, &URI_doc [, use_custom_doc])
```

Description

Use the GenLayoutDoc method to return a new Document object from the one that was used to invoke the MAP layout. This allows you to run the MAP application and return just the data generated instead of the resulting HTML so that you can then generate a physical format (JSON or XML) from the Document.

Parameters

Parameter	Description
<i>layout_name</i>	Specifies the name of the MAP application (layout) as a String value.
<i>URI_index</i>	Specifies the URI index as an Integer.
<i>&URI_doc</i>	Specifies the document for the MAP application to be invoked as a Document object.
<i>use_custom_doc</i>	Specifies an optional boolean value indicating whether to return the Document object based on the custom document instead of the parent document.

Returns

A Document object.

Example

In the following example, the returned Document object is used to generate a JSON (JavaScript Object Notation) structure:

```
local Document &Doc1 = CreateDocument("MAP_LAYOUT", "QE_FLIGHTTEST1_MAP",  
"v1");  
&COM2 = &Doc1.DocumentElement;  
&COM2.GetPropertyByName("PAGE_ID").Value = "INIT";  
&COM2.GetPropertyByName("LAYOUT_ID").Value = - 1;  
&COM2.GetPropertyByName("Pilot").Value = "Major Tom";  
local Document &Doc2 = %IntBroker.GenLayoutDoc("QE_FLIGHTTEST", 1, &Doc1);  
local string &data = &Doc2.GenJsonString();
```

Related Topics

- [GenJsonString method: Document class](#)
- [GenXmlString method: Document class](#)

GenLayoutHTML method: IntBroker class

Syntax

```
GenLayoutHTML(MAP_layout, URI_index, &doc [, element_ID] [, gen_JSON])
```

Description

Use this method to generate all or a portion of the HTML for a specified Mobile Application Platform (MAP) application. Use this method when you want to invoke another MAP application as an external page from the calling MAP application

Parameters

Parameter	Description
<i>MAP_layout</i>	Specifies the name of the MAP application (layout) as a String.
<i>URI_index</i>	Specifies the URI index as an Integer.
<i>&doc</i>	Specifies the document for the MAP application to be invoked as a Document object.
<i>element_ID</i>	Specifies the ID for a specific element as a String, if only the HTML for that element is to be generated. Valid element types include containers, sidebars, headers, and footers. You can use either the system-generated ID or the developer-defined alternate ID for the element.
<i>gen_JSON</i>	Specifies a Boolean value indicating whether to also return the document data as a JSON string.

Returns

The return data type depends on the *gen_JSON* parameter:

- When *gen_JSON* is False or is omitted, the method returns a String that is the HTML.

- When `gen_JSON` is `True`, the method returns a two-dimensional Array of String:
 - The first element is the HTML.
 - The second element is the document data as a JSON string of attribute-value pairs.

Example

In the following example, the external MAP application is to be called from page 4 of the invoking MAP application. A Document object is created and populated with data from the current MAP application. Then, the `GenLayoutHTML` method is executed to return the portion of HTML corresponding to a specific container in the invoked MAP application. Finally, this returned HTML is assigned to a primitive that has been associated with an HTML area element in the invoking MAP application.

```
If &URICOM.GetPropertyByName("PAGE_ID").Value = 4 Then
    &Doc1 = CreateDocument("MAP_LAYOUT", "FLIGHTCARD1_MAP", "v1");
    &COM2 = &Doc1.DocumentElement;
    &COM2.GetPropertyByName("PAGE_ID").Value = "INIT";
    &COM2.GetPropertyByName("LAYOUT_ID").Value = - 1;
    &COM2.GetPropertyByName("Pilot").Value =
&URICOM.GetPropertyByName("Pilot").Value;
    &COM2.GetPropertyByName("CardNbr").Value =
&URICOM.GetPropertyByName("CardNbr").Value;
    &temp = %IntBroker.GenLayoutHTML("FLIGHTCARD", 2, &Doc1,
"mapcont_start_1");
    &COM.GetPropertyByName("prim_text").Value = &temp;
end-if;
```

GetArchData method: IntBroker class

Syntax

`GetArchData(TransactionId, SegmentIndex)`

Description

Use the `GetArchData` method to retrieve an archived message from the message queue.

① Note

This method shouldn't be used in standard message processing. It should only be used when accessing archived messages.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID of the archived message you want to retrieve.
<i>SegmentIndex</i>	Specify the number of the segment of the archived message that you want to retrieve.

Returns

An XML string containing the archived data.

Related Topics

- [GetArchIBInfoData method: IntBroker class](#)

GetArchIBInfoData method: IntBroker class

Syntax

```
GetArchIBInfoData(TransactionId, ParentTransactionId)
```

Description

Use the GetArchIBInfoData method to retrieve return archived IBInfo data.

Note

This method shouldn't be used in standard message processing. It should only be used when accessing archived messages.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID of the archived message you want to retrieve.
<i>ParentTransactionId</i>	Specify the parent transaction ID, for the message.

Returns

An XML string containing the archived data.

Related Topics

- [GetArchData method: IntBroker class](#)

GetContentURI method: IntBroker class

Syntax

```
GetContentURI()
```

Description

Use the GetContentURI method to return the value of the content URI text defined for this system. For example:

```
http://myserver.example.com:8010/psc/MY_SITE/
```

Parameters

None.

Returns

A String value.

Related Topics

- [GetPortalURI method: IntBroker class](#)
- Portal Technology: Setting Portal Node Characteristics

GetDocSchema method: IntBroker class

Syntax

```
GetDocSchema(DocumentKey &Key, Type[optional])
```

Description

Use the GetDocSchema method to access the saved schema for the specified document.

Parameters

Parameter	Description
<i>DocumentKey</i>	Specify the document by populating the Document Key object with package name, document name, and version name.
<i>Type</i>	By default, XML schema is returned if no value is passed. You can use the following values to specify the schema type: • %IB_XML - Returns XML schema. • %IB_JSON - Returns JSON schema.

Returns

A string containing the specified document schema.

Example

```
Local DocumentKey &Key;  
  
&Key = CreateDocumentKey("package", "document", "version");  
&str_json = %IntBroker.GetDocSchema(&Key, %IB_JSON);
```

GetIBInfoData method: IntBroker class

Syntax

```
GetIBInfoData(TransactionId, DataType)
```

Description

Use the GetIBInfoData to return the specified IBInfo data.

Parameters

Parameter	Description
<i>TransactionID</i>	Specify the transaction ID of the message that you want to access.
<i>DataType</i>	Specify the data type of the message you want to access. The valid values are:
Constant Value	Description
%IntBroker_BRK	Get the message for the web services gateway.
%IntBroker_PUB	Get the message for the publication contract.
%IntBroker_SUB	Get the message for the subscription contract.

Returns

An XML string containing the message data.

Related Topics

- [GetArchIBInfoData method: IntBroker class](#)

GetIBTransactionIDforAE method: IntBroker class

Syntax

GetIBTransactionIDforAE(*OperID*, *RunCtlID*)

Description

Use this method to get the Integration Broker transaction ID from within an Application Engine program. You can use this transaction ID to instantiate a message object and thereby retrieve the message content data.

Parameters

Parameter	Description
<i>OperID</i>	Specifies the operator ID for the Application Engine program as a string.
<i>RunCtlID</i>	Specifies the run control ID for the Application Engine program as a string.

Returns

A string representing the transaction ID.

Example

```
&TransID = %IntBroker.GetIBTransactionIDforAE(&opid, &runid);  
&Msg = %IntBroker.GetMessage(&TransID, %IntBroker.SUB);
```

GetImageURL method: IntBroker class

Syntax

```
GetImageURL(image_name)
```

Description

Use this method to get the URL to an image that has been uploaded using the Layout Image Upload page.

Parameters

Parameter	Description
<i>image_name</i>	Specifies the name of the image as a String.

Returns

A String value.

Example

Use the GetImageURL method in a Mobile Application Platform (MAP) application to return the image's URL to be assigned to the designated dynamic image's primitive.

```
&COM_NAV.GetPropertyByName("Altitude").Value =  
%IntBroker.GetImageURL("MAP_ACTIONS");
```

GetMessage method: IntBroker class

Syntax

```
GetMessage([TransactionId, DataType])
```

Description

Use the GetMessage method to return a message object.

If you specify a transaction ID and data type, the GetMessage method populates the message object with the data from that message.

If you do not specify any parameters, the GetMessage method doesn't populate the message with data. Instead, it creates a new instance of a message object. In this case, you must use another method, such as GetRowset, to populate the message object. You must always populate the message object with data before running any methods on it.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID for the message that you want returned.
<i>DataType</i>	Specify the type of message that you want returned. The valid values are:
Constant Value	Description
%IntBroker_BRK	Get the message for the web services gateway.
%IntBroker_PUB	Get the message for the publication contract.
%IntBroker_SUB	Get the message for the subscription contract.

Returns

A reference to a message object if successful, Null if not successful.

Example

The following example returns a populated message object:

```
Local Message &MSG;  
Local string &TransactionId;  
  
&TransactionId = "0f3617dl-c6f4-11d9-a4bd-c12cba1bc2f9"  
&MSG = %IntBroker.GetMessage(&TransactionId, %IntBroker_BRK);
```

Related Topics

- [GetRowset method: Message class](#)
- [TransactionId property: Message class](#)

GetMessageErrors method: IntBroker class

Syntax

```
GetMessageErrors(TransactionId)
```

Description

Use the GetMessageErrors method to return an array that contains the errors that an application has set for the message, and have been written to the error queue. This method is generally only used with asynchronous messages.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID for the message, as a string.

Returns

An array of string. If there are no error messages, the Len property of the array is 0.

Example

The following is an example of using the method for returning web services gateway error messages:

```
&MyErrors = %IntBroker.GetMessageErrors(&TransactionId);
```

Related Topics

- [SetMessageError method: IntBroker class](#)
- Integration Broker: Processing Inbound Errors

GetMsgSchema method: IntBroker class

Syntax

```
GetMsgSchema(MsgName, MsgVersion)
```

Description

Use the GetMsgSchema method to access the saved schema for the specified message.

If you specify a message that does not have a saved schema, you receive a null value.

Parameters

Parameter	Description
<i>MsgName</i>	Specify the name of the message for which you want to access a schema. You can either specify the name of the message as a string, or preface the message name with the keyword Message.
<i>MsgVersion</i>	Specify the message version.

Returns

A string containing the message schema. If you try to get a schema for a message that does not have a saved schema, returns null.

Related Topics

- [MsgSchemaExists method: IntBroker class](#)
- Integration Broker: Understanding the Message Schema Builder

GetPortalURI method: IntBroker class

Syntax

```
GetPortalURI()
```

Description

Use the GetPortalURI method to return the value of the portal URI text defined for this system. For example:

`http://myserver.example.com:8010/psp/MY_SITE/`

Parameters

None.

Returns

A String value.

Related Topics

- [GetContentURI method: IntBroker class](#)
- Portal Technology: Setting Portal Node Characteristics

GetSyncIBInfoData method: IntBroker class

Syntax

```
GetSyncIBInfoData(TransactionId, %LogType [, Archive])
```

Description

Use the GetSyncIBInfoData method to return a log containing information about synchronous transactions.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID of the published message.
<i>LogType</i>	Specify the type of log you want returned, based on the type of message. See below for the valid values.
<i>Archive</i>	Specify whether to retrieve any archived logs as well. This parameter takes a Boolean value: true to return archived logs, false otherwise. The default value is false.

For the *LogType* parameter, the valid values are:

Constant Value	Description
%Sync_RequestOrig	Gets the log for a sync request original data message.
%Sync_RequestTrans	Gets the log for a sync request transformed data message.

Constant Value	Description
%Sync_ResponseOrig	Gets the log for a sync response original data message.
%Sync_ResponseTrans	Gets the log for a sync response transformed data message.

Returns

An XML string containing the log data.

Related Topics

- Integration Broker Service Operations Monitor: Service Operations Monitor Features

GetSyncLogData method: IntBroker class

Syntax

```
GetSyncLogData(TransactionId, %LogType [, Archive])
```

Description

Use the GetSyncLogData method to return a log containing information about the specified synchronous message.

You can use this information for debugging. Using this method, you can obtain the request and response data in a synchronous request, both pre- and post-transformation.

This function is used in the PeopleCode for the Message Monitor.

Parameters

Parameter	Description
<i>TransactionId</i>	Specify the transaction ID of the published message.
<i>LogType</i>	Specify the type of log you want returned, based on the type of message. See below for the valid values.
<i>Archive</i>	Specify whether to retrieve any archived logs as well. This parameter takes a Boolean value: true to return archived logs, false otherwise. The default value is false.

For the *LogType* parameter, the valid values are:

Constant Value	Description
%Sync_RequestOrig	Gets the log for a sync request original data message.
%Sync_RequestTrans	Gets the log for a sync request transformed data message.
%Sync_ResponseOrig	Gets the log for a sync response original data message.

Constant Value	Description
%Sync_ResponseTrans	Gets the log for a sync response transformed data message.

Returns

An XML string containing the log data.

Related Topics

- Integration Broker Service Operations Monitor: Service Operations Monitor Features

GetURL method: IntBroker class

Syntax

```
GetURL(service_op_name, service_op_index, &doc_object, [secure_target],  
[encode_unsafe])
```

Description

Use this method to generate a fully qualified URL for any REST-based service operation resource.

Parameters

Parameter	Description
<i>service_op_name</i>	Specifies the Integration Broker service operation as a string.
<i>service_op_index</i>	Specifies the index for the URI as an integer. This index corresponds to the row number in the URI grid of the REST Resource Definition section of the service operation definition.
<i>&doc_object</i>	Specifies the document template for the service operation as a Document object.
<i>secure_target</i>	Specifies whether the REST location is a secure target location. The default value is the non-secure target location.
<i>encode_unsafe</i>	Specifies whether to encode unsafe characters as a Boolean value. The default is False (no encoding).

Returns

A string populated with the fully qualified URL.

Example

HTML is generated within the OnRequest event of a REST-based provider service using links defined from other REST-based service operations. Note that the REST-based service

operation resources on either the publishing node (the provider) or the subscribing node (the consumer) can be used to generate the fully qualified links.

```
import PS_PT:Integration:IRequestHandler;

class RESThandler implements PS_PT:Integration:IRequestHandler
    method OnRequest(&message As Message) Returns Message;
    method OnError(&request As Message) Returns string;
end-class;

method OnRequest
    /* &message as Message */
    /* Returns Message */
    /* Extends/implements PS_PT:Integration:IRequestHandler.OnRequest */
    Local Document &Doc_Tmpl, &DOC;
    Local Compound &COM_Tmpl, &COM;
    Local Message &response;
    Local string &STR, &STR1, &STR2, &STR3, &STR4, &strHTML;
    Local boolean &bRet;
    &response = CreateMessage(Operation.WEATHERSTATION_GET,
%IntBroker_Response);
    /* read URI Document to get parms out from the request*/
    &Doc_Tmpl = &message.GetURIDocument();
    &COM_Tmpl = &Doc_Tmpl.DocumentElement;
    /* Instantiate a Document object based on the REST-based service
operations ⇒
    document template that you want to create a link for */
    &DOC = CreateDocument("Weather", "WeatherTemplate", "v1");
    &COM = &DOC.DocumentElement;
    /* based off the data from the request populate the Document object */
    If &COM_Tmpl.GetPropertyByName("state").Value = "Washington" Then
    &COM.GetPropertyByName("state").Value = "Washington";
    /* call new method to create fully qualified URL(s) */
    &COM.GetPropertyByName("city").Value = "WhiteSalmon";
    &STR = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC, true, true);
    &COM.GetPropertyByName("city").Value = "Troutlake";
    &STR1 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);
    &COM.GetPropertyByName("city").Value = "Yakima";
    &STR2 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);
    &COM.GetPropertyByName("city").Value = "Lyle";
    &STR3 = %IntBroker.GetURL("WEATHERSTATION_GET", 2, &DOC);
    /* use these URLs as bind variables for the HTML definition */
    &strHTML = GetHTMLText(HTML.WEATHER_CITIES, &STR, &STR1, &STR2, &STR3);
    /* set the data in the response message */
    &bRet = &response.SetContentString(&strHTML);
    End-If;
    Return &response;
end-method;
```

Related Topics

- [GetURIDocument method: Message class](#)

InBoundPublish method: IntBroker class

Syntax

```
InBoundPublish(&Message)
```

Description

Use the InBoundPublish method to send an asynchronous message based on the specified message to simulate an inbound asynchronous request from an external node. Although you are sending a message to yourself, it goes through all the inbound message processing that the specified message would.

Prior to call the InBoundPublish method, the Message object needs to populated with the requesting node and external operation name.

See Integration Broker: Simulating Receiving Messages from External Nodes.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated message object that you want to use for the message simulation.

Returns

A Boolean value, true if the message is published successfully, false otherwise.

Related Topics

- [Publish method: IntBroker class](#)
- [SyncRequest method: IntBroker class](#)

IsOperationActive method: IntBroker class

Syntax

```
IsOperationActive(OperationName [,OperationVersion])
```

Description

Use the IsOperationActive method to determine if an operation is active or not.

Parameters

Parameter	Description
<i>OperationName</i>	Specify the name of the operation that you want to check the status of.
<i>OperationVersion</i>	Specify the version of the specified operation that you want to check the status of, as a string.

Returns

A Boolean value: true if the operation is active, false otherwise.

MAPLogout method: IntBroker class

Syntax

```
MAPLogout(MAP_layout)
```

Description

Use this method to generate the logout URL for this Mobile Application Platform (MAP) application. This URL can be assigned to a button, link, or some other page element. When the user clicks this element, the user is signed out of the application.

Parameters

Parameter	Description
<i>MAP_layout</i>	Specifies the name of the MAP application (layout) as a String.

Returns

A String value.

Example

Use this method to return the URL that can be assigned to a button, which when clicked will sign the user out of the application.

```
&URL_str = %IntBroker.MAPLogout(&MAP.LayoutName);
```

MAPSessionTimeout method: IntBroker class

Syntax

```
MAPSessionTimeout()
```

Description

Use the MAPSessionTimeout method to return an Integer value representing the session timeout value (in minutes) as defined on the Map Security - General page.

Parameters

None.

Returns

A Integer value.

MAPTimeout method: IntBroker class

Syntax

```
MAPTimeout(layout_name)
```

Description

Use the MAPTimeout method to return the timeout URL for the specified MAP layout. The following provides an example of a timeout URL:

```
http://myserver.example.com:8010/PSIGW/RESTListeningConnector/MY_SITE/  
SUB1_MAP.v1/?cmd=maptimeout
```

Parameters

Parameter	Description
<i>layout_name</i>	Specifies the MAP application (layout) as a String value.

Returns

A String value.

MsgSchemaExists method: IntBroker class

Syntax

```
MsgSchemaExists(MsgName, MsgVersion)
```

Description

Use the MsgSchemaExists method to determine if a schema has been created and saved for the specified message.

Parameters

Parameter	Description
<i>MsgName</i>	Specify the name of the message for which you want to access a schema. You can either specify the name of the message as a string, or preface the message name with the keyword Message.
<i>MsgVersion</i>	Specify the message version.

Returns

A Boolean value: true if the message schema exists, false otherwise.

Related Topics

- [GetMsgSchema method: IntBroker class](#)

- Integration Broker: Understanding the Message Schema Builder

Publish method: IntBroker class

Syntax

```
Publish(&Message [, &ArrayOfNodeNames] [, IsEnqueued])
```

Description

The Publish method publishes a message to the message queue for the default message version.

This method does not publish the message if the IsOperationActive property for the message is False.

This method publishes a message asynchronously, that is, a reply message is not automatically generated. To publish a message synchronously, use the SyncRequest method.

Note

This method supports nonrowset-based messages only if the data is populated using the SetXmlDoc method.

If the Publish method is called and the message isn't populated (either using SetXmlDoc or one of the rowset methods,) an empty message is published.

The Publish method can be called from any PeopleCode event, but is generally called from an Application Engine PeopleCode step or from a component.

When publishing from a component, you should publish messages only from the SavePostChange event, either from record field or component PeopleCode. This way, if there's an error in your publish code, the data isn't committed to the database. Also, since SavePostChange is the last Save event fired, you avoid locking the database while the other save processing is happening.

However, until the message is published, the tables involved with the component are locked and are not saved. To avoid problems with this, specify the *Deferred_Mode* property as true, so the message is published after the table data has been committed to the database.

Note

If you're publishing a message from within an Application Engine program, the message won't actually be published until the calling program performs a Commit.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated message object to be published.

Parameter	Description
<i>&ArrayOfNodeNames</i>	Specify an already instantiated array of string containing the names of the nodes that you want to publish to.
<i>IsEnqueued</i>	Specify whether the message is to be enqueued or not. This parameter takes a Boolean value: true if the message is to be enqueued, false otherwise. The default value is false.

Returns

None.

Example

```
Local Message &Msg;  
Local Rowset &rs;  
Local IntBroker &Ib;  
  
&Flight_profile = GetLevel0();  
  
&Msg = CreateMessage(Operation.ASYNC, %IntBroker_Request);  
  
&Msg.CopyRowset(&FlightProfile);  
  
&Ib = %IntBroker;  
  
&Ib.Publish(&Msg);
```

Related Topics

- [SyncRequest method: IntBroker class](#)

Resubmit method: IntBroker class

Syntax

```
Resubmit({TransactionId, QueueName, DataType, SegmentIndex} |  
{TransactionIdArray, QueueNameArray, DataTypeArray, SegmentIndexArray})
```

Description

Use the Resubmit method to programmatically resubmit either a message, or a list of messages, from the message queue, much the same as you can do in the message monitor.

You may want to use this method after an end-user has finished fixing any errors in the message data, and you want to resubmit the message, rerunning the PeopleCode.

This method is only available when the message has one of the following statuses:

- Canceled
- Edited
- Error

- Timeout

If you are specifying an array of messages to be resubmitted, and any message in the array fails for any reason (for example, you specify a message that doesn't have the correct status) no messages are resubmitted and the method return value is false.

Parameters

Parameter	Description
<i>TransactionId</i> <i>TransactionIdArray</i>	Specify either a single transaction ID as a string, or specify an array of string containing the transaction IDs of the messages you want to resubmit.
<i>QueueName</i> <i>QueueNameArray</i>	Specify either a single queue name as a string, or specify an array of string containing the queue names that contain the messages you want to resubmit.
<i>DataType</i> <i>DataTypeArray</i>	Specify either a single data type, or an array of string containing the data types. See below for the valid data type values.
<i>SegmentIndex</i> <i>SegmentIndexArray</i>	Specify either a specific segment, or an array of integer containing the segment numbers you want to resubmit.

For the *DataType* or *DataTypeArray* parameters, the valid data types are:

Constant Value	Description
%IntBroker_BRK	Resubmit the message for the web services gateway.
%IntBroker_PUB	Resubmit the message for the publication contract.
%IntBroker_SUB	Resubmit the message for the subscription contract.

Returns

A Boolean value: true if the message or messages are resubmitted successfully, false otherwise.

Related Topics

- [Cancel method: IntBroker class](#)

SetMessageError method: IntBroker class

Syntax

```
SetMessageError(TransactionID, MsgSet, MsgNumber, Error_Location,  
ParamListCounter, [Param] ...)
```

Description

Use the SetMessageError method to write messages to the error queue. This method is used with asynchronous messages only.

Parameters

Parameter	Description
<i>TransactionID</i>	Specify the transaction ID for the message as a string.
<i>MsgSet</i>	Specify the number of the message set that the message associated with the error is associated with.
<i>MsgNumber</i>	Specify the message number that you want to associate with this error.
<i>Error_Location</i>	Specify where the error occurred, or any additional information you want to give about the error. This is a string, and allows 254 characters.
<i>ParamListCounter</i>	An integer value from 0 to 4 specifying the number of <i>Param</i> substitution strings to be passed.
<i>Param</i>	Specify up to four <i>Param</i> values to be used as substitution strings in the message text. The first <i>Param</i> value is used in the first substitution (that is, for %1,) the second is used in the second (that is, for %2), and so on.

Returns

A Boolean value, true if the error message was associated correctly, false otherwise.

Example

The following is an example of setting an error message for the web services gateway:

```
&Rslt = %IntBroker.SetMessageError(&TransactionId, &msgset, &msgnum, "error ⇒  
location", 4, &parm1, &parm2, &parm3, &parm4);
```

If you are passing just two parameters, then the call would be similar to this:

```
&Rslt = %IntBroker.SetMessageError(&TransactionId, &msgset, &msgnum, "error ⇒  
location", 2, &parm1, &parm2);
```

Related Topics

- Integration Broker: Processing Inbound Errors
- [GetMessageErrors method: IntBroker class](#)

SetStatus method: IntBroker class

Syntax

```
SetStatus(&Message, Status)
```

Description

Use the `SetStatus` method to set the status of a publication or subscription contract, much the same way you do it in the message monitor.

You may want to use this method after an end-user has finished fixing any errors in the message data.

You can set the status of a contract to one of the following statuses:

- Canceled
- Done
- Error
- New

The method is available only when the message instance has one of the following statuses:

- Canceled
- Done
- Error
- New

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated message object that you want to set the status for.
<i>Status</i>	Specify the status that you want to set the message to. Valid status are:
Constant Value	Description
<code>%Operation_Canceled</code>	Cancel the message.
<code>%Operation_Done</code>	Set the message to done.
<code>%Operation_Error</code>	Set the message to be in error.
<code>%Operation_New</code>	Specify the message as new.

Returns

None.

SwitchAsyncEventUserContext method: IntBroker class

Syntax

```
SwitchAsyncEventUserContext(UserID, LanguageCode)
```

Description

Use the `SwitchAsyncEventUserContext` method to switch the user context within an Integration Broker asynchronous event.

Parameters

Parameter	Description
<i>UserID</i>	Specify the user ID, as a string, to which you want to switch the context.
<i>LanguageCode</i>	Specify the language code, as a string, for the user ID.

Returns

A Boolean value: true if the switch user was successful, false otherwise.

Example

```
&returnValue = %IntBroker.SwitchAsyncEventUserContext("VP1", "ENG");
```

SyncRequest method: IntBroker class

Syntax

```
SyncRequest([&MsgArray, &NodeNames])
```

Description

Use the SyncRequest method to send multiple messages at the same time. You should only use this message with synchronous messages. You can also use this method to send a single synchronous message at a time, or you can use the SyncRequest Message class method.

If you want to publish messages asynchronously, use the Publish method.

Note

This method supports nonrowset-based messages only if the SetXmlDoc method is used to populate the message prior to using the SyncRequest method.

You must set the thread pool size of the application server on the receiving system to a value greater than 1 (the default) in order to process more than one message at a time.

How many threads you specify determines how many messages are worked on simultaneously. For example, if you have 10 messages in *&MsgArray*, and your thread pool size is 5, then only 5 messages are processed at a time.

The maximum number you can specify for your thread pool size is 10.

Parameters

Parameter	Description
<i>&MsgArray</i>	Specify an already instantiated array of messages that contains the messages you want to publish.

Parameter	Description
<i>&NodeNames</i>	Specify an already instantiated array of string containing the names of the nodes that you want to publish to. The first message in the array of messages is published to the first node, the second message is published to the second node, and so on.

Returns

An array of messages. These are the corresponding messages returned for the published messages. The first message in the returned array corresponds to the first message in the published array, the second message with the second, and so on.

Example

The following is an example of how creating and receiving a series of messages:

```
Local Rowset &FLIGHTPLAN, &FLIGHTPLAN_RETURN;
Local Message &MSG;
Local File &BI_FILE;
Declare Function out_BI_results PeopleCode QE_FLIGHTDATA.QE_ACNUMBER
FieldFormula;

Local array of Message &messages;
Local array of Message &return_mesages;

&messages = CreateArrayRept(&MSG, 0);
&return_mesages = CreateArrayRept(&MSG, 0);

&FLIGHT_PROFILE = GetLevel0();
&messages [1] = CreateMessage(OPERATION.QE_FLIGHTPLAN_SYNC);
&messages [1].CopyRowset(&FLIGHT_PROFILE);

&messages [2] = CreateMessage(OPERATION.QE_FLIGHTPLAN_SYNC);
&messages [2].CopyRowsetDelta(&FLIGHT_PROFILE);

&return_mesages = %IntBroker.SyncRequest(&messages);

&FLIGHTPLAN_RETURN = &return_mesages [1].GetRowset();
&temp = &return_mesages [1].GenXMLString();

out_BI_results(&temp);

&FLIGHTPLAN_RETURN = &return_mesages [2].GetRowset();
&temp = &return_mesages [2].GenXMLString();

out_BI_results(&temp);
```

Related Topics

- [SyncRequest method: Message class](#)

Update method: IntBroker class

Syntax

Update(*&Message*)

Description

Use the Update method to update a message in the message queue with the specified message object.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated and populated message object to be used to update an existing message in the message queue.

Returns

A Boolean value, true if the message is updated successfully, false otherwise.

Related Topics

- [UpdateXmlDoc method: IntBroker class](#)

UpdateCSSMetadata method: IntBroker class

Syntax

UpdateCSSMetadata(*CSS*)

Description

Use the UpdateCSSMetadata method to return the input style sheet after substituting an actual image for the %MAP_IMAGE meta-HTML variable.

Parameters

Parameter	Description
<i>CSS</i>	Specifies the free form style sheet data as a String value.

Returns

A String value.

UpdateDocument method: IntBroker class

Syntax

```
UpdateDocument(&doc, update_type)
```

Description

Use this method to update the database based on the data in the specified Document object. The method can be used in a Mobile Application Platform (MAP) event only.

! Important

To use this method, the document must be defined as a physical relational document.

Parameters

Parameter	Description
<i>&doc</i>	Specifies the document as a Document object.
<i>update_type</i>	Specifies the type of update to perform as an Integer. The constant values are:

Constant Value	Description
%Document_Update	Update the database by adding the keys and data from the specified document.
%Document_Replace	Update the database by first deleting data associated with any keys specified in the document, and then replacing them with the keys and data from the specified document.
%Document_Delete	Update the database by deleting data associated with any keys from the specified document.

Returns

A Boolean value: True if the update occurred successfully, False otherwise.

UpdateJSMetadata method: IntBroker class

Syntax

```
UpdateJSMetadata(JS)
```

Description

Use the UpdateJSMetadata method to return the input JavaScript after substituting the system's default local node name for the %MAP_NODE meta-HTML variable.

Parameters

Parameter	Description
<i>JS</i>	Specifies the JavaScript data as a String value.

Returns

A String value.

UpdateXmlDoc method: IntBroker class

Syntax

`UpdateXmlDoc(&XmlDoc, TransactionId, DataType)`

Description

Use the UpdateXmlDoc method to update a message in the message queue with the specified message data.

Note

This method shouldn't be used in a subscription program.

Parameters

Parameter	Description
<i>&XmlDoc</i>	Specify an already instantiated and populated XmlDoc object.
<i>TransactionId</i>	Specify the transaction ID of the message you want to update.
<i>DataType</i>	Specify the data type of the message that you want to update. Valid values are:

Constant Value	Description
%IntBroker_BRK	Update the message for the web services gateway.
%IntBroker_PUB	Update the message for the publication contract.
%IntBroker_SUB	Update the message for the subscription contract.

Returns

A Boolean value, true if the message was updated successfully, false otherwise.

Related Topics

- [Update method: IntBroker class](#)

IBInfo Class

An IBInfo object is returned from the IBInfo message class property.

Related Topics

- [IBInfo property: Message class](#)

IBInfo Class Methods

In this section, we discuss the IBInfo class methods. The methods are discussed in alphabetical order.

All methods work with both asynchronous as well as synchronous messages unless specified

AddAEAttribute method: IBInfo class

Syntax

```
AddAEAttribute(Name, value)
```

Description

Use this method to add an attribute as a name-value pair to the Message object to be passed back to the response application class defined on the Application Engine handler.

Parameters

Parameter	Description
<i>Name</i>	Specifies the attribute name as a string.
<i>value</i>	Specifies the attribute value as a string.

Returns

A Boolean value: True if the attribute was added successfully, False otherwise.

Example

```
/* Add the name value pair data you want to pass to the response app class */
/* in the AE program */

&b = &MSG.IBInfo.AddAEAttribute("sail name", "NorthWave");
If &b <> True Then
    MessageBox(0, "", 0, 0, "error adding ae attribute");
End-If;

&b = &MSG.IBInfo.AddAEAttribute("size", "4.2");
If &b <> True Then
    MessageBox(0, "", 0, 0, "error adding ae attribute");
End-If;

&b = &MSG.IBInfo.AddAEAttribute("type", "Surflite");
```

```
If &b <> True Then
    MsgBox(0, "", 0, 0, "error adding ae attribute");
End-If;

/* Need to call this method for the attributes to be saved and transferred */
/* correctly */
&b = &MSG.IBInfo.InsertAEResponseAttributes();
If &b <> True Then
    MsgBox(0, "", 0, 0, "error inserting AE response attributes");
End-If;

/* ***** */
/* In the response application class to retrieve the name-value pairs */

For &i = 1 To &MSG.IBInfo.GetNumberOfAEAttributes()
    &name = &MSG.IBInfo.GetAEAttributeName(&i);
    &value = &MSG.IBInfo.GetAEAttributeValue(&i);
End-For;
```

Related Topics

- [ClearAEAttributes method: IBInfo class](#)
- [DeleteAEAttribute method: IBInfo class](#)
- [GetAEAttributeName method: IBInfo class](#)
- [GetAEAttributeValue method: IBInfo class](#)
- [GetNumberOfAEAttributes method: IBInfo class](#)
- [GetTransactionIDforAE method: IBInfo class](#)
- [InsertAEResponseAttributes method: IBInfo class](#)

AddAttachment method: IBInfo class

Syntax

AddAttachment(*Path*)

Description

Use the AddAttachment method to add an attachment to a message.

Parameters

Parameter	Description
<i>Path</i>	Specify an absolute path, including the file name and type, as a string, of the file you want to attach to the message.

Returns

A string containing a content ID, which can be used for accessing the attachment with other methods, such as DeleteAttachment or SetAttachmentProperty.

Example

The following example shows sending an attachment with an asynchronous message:

```
Local Message &MSG;  
Local Rowset &FLIGHT_PROFILE;  
Local String &Attachment_Id;  
Local Boolean &Test;  
Local IntBroker &IntBroker;  
  
QE_FLIGHTDATA.QE_ACNUMBER.Value = QE_FLIGHTDATA.QE_ACNUMBER + 1;  
  
&FLIGHT_PROFILE = GetLevel0();  
  
&MSG = CreateMessage(Operation.ASYNC_RR);  
  
&Attachment_Id = &MSG.IBInfo. AddAttachment("C:\\temp\\MyFile.txt");  
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,  
%Attachment_Encoding,⇒  
    "UTF-8");  
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id, %Attachment_Base,⇒  
    "Standard");  
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,  
%Attachment_Disposition,⇒  
    "Pending");  
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,  
%Attachment_Language,⇒  
    "English");  
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,  
%Attachment_Description,⇒  
    "Parts data");  
  
&MSG.CopyRowset(&FLIGHT_PROFILE);  
  
&IntBroker = %IntBroker  
  
&IntBroker.Publish(&MSG);
```

Related Topics

- [ClearAttachments method: IBInfo class](#)
- [DeleteAttachment method: IBInfo class](#)
- [SetAttachmentProperty method: IBInfo class](#)

AddAttribute method: IBInfo class

Syntax

```
AddAttribute(name, value)
```

Description

Use this method to add an attribute to an IBInfo object.

Note

This method can be used for content-based routing only, typically in your implementation of the `IRouter.OnRouteSend` or `IRouter.OnRouteReceive` methods.

The maximum length of the attribute name is 30 characters. The maximum length of the attribute value is 254 characters.

Parameters

Parameter	Description
<i>name</i>	Specifies the attribute name as a string.
<i>value</i>	Specifies the attribute value as a string.

Returns

A Boolean value: true if the addition of the attribute was successful, false otherwise.

Example

```
&bRet = &MSG.IBInfo.AddAttribute("employeeID", "123456");
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.

AddContainerAttribute method: IBInfo class

Syntax

```
AddContainerAttribute(Name, Value)
```

Description

Use this method to add a container attribute by specifying an attribute name-value pair.

You can add attributes to container messages that contain rowset-based message parts to provide integration partners with data and information, without adding the information to the message definition.

Parameters

Parameter	Description
<i>Name</i>	Specifies the container attribute name as a string.
<i>Value</i>	Specifies the container attribute value as a string.

Returns

A Boolean value: True if the container attribute was added successfully, False otherwise..

Example

```
Local Message &MSG;  
Local Rowset &RS;  
Local boolean &Bo;  
  
&RS = GetLevel0();  
&MSG = CreateMessage(Operation.QE_CONT_ATTRB);  
  
&Bo = &MSG.IBInfo.AddContainerAttribute("Test1", "1");  
&Bo = &MSG.IBInfo.AddContainerAttribute("Test2", "10");  
&Bo = &MSG.IBInfo.AddContainerAttribute("Test3", "100");  
  
&MSG.CopyPartRowset(1, &RS);  
  
%IntBroker.Publish(&MSG);
```

Related Topics

- [Integration Broker: Managing Container Messages](#)
- [ClearContainerAttributes method: IBInfo class](#)
- [DeleteContainerAttribute method: IBInfo class](#)
- [GetContainerAttributeName method: IBInfo class](#)
- [GetContainerAttributeValue method: IBInfo class](#)
- [GetNumberOfContainerAttributes method: IBInfo class](#)

ClearAEAttributes method: IBInfo class

Syntax

```
ClearAEAttributes()
```

Description

Use this method to delete all Application Engine handler attributes from the Message object.

Parameters

None.

Returns

None.

Related Topics

- [AddAEAttribute method: IBInfo class](#)
- [DeleteAEAttribute method: IBInfo class](#)

ClearAttachments method: IBInfo class

Syntax

```
ClearAttachments()
```

Description

Use the ClearAttachments method to clear all attachments. If you want to delete a particular attachment, use DeleteAttachment instead.

Parameters

None.

Returns

None.

Related Topics

- [AddAttachment method: IBInfo class](#)
- [DeleteAttachment method: IBInfo class](#)

ClearAttributes method: IBInfo class

Syntax

```
ClearAttributes()
```

Description

Use this method to delete all attributes from an IBInfo object.

Note

This method can be used for content-based routing only, typically in your implementation of the IRouter.OnRouteSend or IRouter.OnRouteReceive methods.

Parameters

None.

Returns

None.

Example

```
&MSG.IBInfo.ClearAttributes();
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.

ClearContainerAttributes method: IBInfo class

Syntax

```
ClearContainerAttributes()
```

Description

Use this method to delete all container attributes in the IBInfo object.

Parameters

None

Returns

None

Example

```
&MSG.IBInfo.ClearContainerAttributes();
```

Related Topics

- [AddContainerAttribute method: IBInfo class](#)
- [DeleteContainerAttribute method: IBInfo class](#)

DeleteAEAttribute method: IBInfo class

Syntax

```
DeleteAEAttribute(Name)
```

Description

Use this method to delete the Application Engine handler attribute specified by attribute name from the Message object.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the attribute as a string.

Returns

A Boolean value: True if the deletion was successful, False otherwise.

Related Topics

- [AddAEAttribute method: IBInfo class](#)
- [ClearAEAttributes method: IBInfo class](#)
- [GetAEAttributeName method: IBInfo class](#)

DeleteAttachment method: IBInfo class

Syntax

DeleteAttachment(*Index* | *Content_ID*)

Description

Use the DeleteAttachment method to remove the specified attachment from the message. You can either specify the number of the attachment, or the content ID associated with the attachment (generated when the attachment was added to the message with AddAttachment.)

If you want to clear all attachments, instead of a particular one, use the ClearAttachments methods instead.

Parameters

Parameter	Description
<i>Index</i> <i>Content_ID</i>	Specify either the number of the attachment, or the content ID associated with the attachment, for the attachment you want to delete.

Returns

A Boolean value: true if the attachment was deleted successfully, false otherwise.

Related Topics

- [AddAttachment method: IBInfo class](#)
- [ClearAttachments method: IBInfo class](#)

DeleteAttribute method: IBInfo class

Syntax

DeleteAttribute(*name*)

Description

Use this method to delete an attribute from an IBInfo object by specifying the attribute's name as a string.

Note

This method can be used for content-based routing only, typically in your implementation of the `IRouter.OnRouteSend` or `IRouter.OnRouteReceive` methods.

Parameters

Parameter	Description
<i>name</i>	Specifies the attribute by name as a string.

Returns

A Boolean value: true if the deletion of the attribute was successful, false otherwise.

Example

```
&bRet = &MSG.IBInfo.DeleteAttribute("employeeID");
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.
- [GetAttributeName method: IBInfo class](#)

DeleteContainerAttribute method: IBInfo class

Syntax

```
DeleteContainerAttribute(Name)
```

Description

Use this method to delete a container attribute based on the attribute name.

Parameters

Parameter	Description
<i>Name</i>	Specifies the container attribute name as a string.

Returns

A Boolean value: True if the deletion was successful, False otherwise.

Example

```
&Ret = &MSG.IBInfo.DeleteContainerAttribute("MyAttribute");
```

Related Topics

- [AddContainerAttribute method: IBInfo class](#)
- [ClearContainerAttributes method: IBInfo class](#)
- [GetContainerAttributeName method: IBInfo class](#)

GetAEAttributeName method: IBInfo class

Syntax

GetAEAttributeName(*nIndex*)

Description

Use this method to return the name of the *n*th Application Engine handler attribute from the Message object. For example, the response application class can use this method to retrieve the attribute name.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which attribute in the Message object.

Returns

A string populated with the attribute name.

Related Topics

- [AddAEAttribute method: IBInfo class](#)
- [GetAEAttributeValue method: IBInfo class](#)
- [GetNumberOfAEAttributes method: IBInfo class](#)

GetAEAttributeValue method: IBInfo class

Syntax

GetAEAttributeValue(*nIndex*)

Description

Use this method to return the value of the *n*th Application Engine handler attribute from the Message object. For example, the response application class can use this method to retrieve the attribute value.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which attribute in the Message object.

Returns

A string populated with the attribute value.

Related Topics

- [AddAEAttribute method: IBInfo class](#)
- [GetAEAttributeName method: IBInfo class](#)
- [GetNumberOfAEAttributes method: IBInfo class](#)

GetAttachmentContentID method: IBInfo class

Syntax

GetAttachmentContentID(*Index*)

Description

Use the GetAttachmentContentID to return the content ID for the specified attachment. The content ID is associated with an attachment when it is added to a message using AddAttachment.

You can use the content ID with other methods, such as AddAttachmentProperty and DeleteAttachment.

Parameters

Parameter	Description
<i>Index</i>	Specify the number of the attachment that you want to access the content ID for.

Returns

A string containing the content ID.

Related Topics

- [AddAttachment method: IBInfo class](#)
- [GetAttachmentProperty method: IBInfo class](#)

GetAttachmentProperty method: IBInfo class

Syntax

GetAttachmentProperty(*Content_ID*, *Property_Type*)

Description

Use the GetAttachmentProperty method to return the value of an attachment property.

Parameters

Parameter	Description
<i>Content_ID</i>	Specify the content ID of the attachment that you want to access, as a string.
<i>Property_Type</i>	Specify the type of property that you want to access. Valid values are:
Constant Value	Description
%Attachment_Base	Specifies the base name of the attachment, that is, if the actual document name you want is different, such as if it is zipped or otherwise compressed as part of other documents.
%Attachment_Description	Specifies the description of the attachment.
%Attachment_Disposition	Specifies the disposition of the attachment, whether it's displayed inline or as an attachment.
%Attachment_Encoding	Specify the encoding of the attachment. For example, Content-type: text/plain or charset=Big5.
%Attachment_Language	Specify the language used in the attachment, as a string.
%Attachment_Location	Specify an additional location for the attachment.
%Attachment_Type	Specify the attachment type.
%Attachment_URL	Specifies the URL for the attachment. The URL must be an absolute URL.

Returns

A string containing the value of the specified property.

Example

The following example processes an attachment from a notification PeopleCode program:

```

Import PS_PT:Integration:INotificationHandler;

Class FLIGHTPROFILE implements PS_PT:Integration:INotificationHandler
    method FLIGHTPROFILE();
    method OnNotify(&MSG As Message);

end-class;

/* Constructor */
method FLIGHTPROFILE
    %Super = create PS_PT:Integration:INotificationHandler();
end-method;

method OnNotify
    /* &MSG as Message */
    /* Extends/implements PS_PT:Integration:INotificationHandler.OnNotify */

```

```

Local rowset &RS;
Local integer &Count;
Local string &Attachment_Id;
Local array of array of string &Result;

&RS = &MSG.GetRowset();

&Count = &MSG.IBInfo.NumberOfAttachments;
If &Count > 0 Then

    For &I = 1 to &Count
        &Attachment_ID = &MSG.IBInfo.GetAttachmentContentID(&I);
        &Result[&I][1] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Encoding);
        &Result[&I][2] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Type);
        &Result[&I][3] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_URL);
        &Result[&I][4] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Base);
        &Result[&I][5] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Location);
        &Result[&I][6] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Disposition);
        &Result[&I][7] = &MSG.IBInfo.GetAttachmentProperty(&Attachment_Id,⇒
%Attachment_Description);

    End-For;

End-if;

/* process data from message */

end-method;

```

Related Topics

- [SetAttachmentProperty method: IBInfo class](#)

GetAttributeName method: IBInfo class

Syntax

```
GetAttributeName(nIndex)
```

Description

Use this method to return the attribute name for the *nth* attribute of the IBInfo object as a string.

Note

This method can be used for content-based routing only, typically in your implementation of the `IRouter.OnRouteSend` or `IRouter.OnRouteReceive` methods.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which attribute in the IBInfo object.

Returns

A string populated with the attribute name.

Example

```
&AttrName = &MSG.IBInfo.GetAttributeName(&i);
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.
- [GetAttributeValue method: IBInfo class](#)
- [GetNumberOfAttributes method: IBInfo class](#)

GetAttributeValue method: IBInfo class

Syntax

```
GetAttributeValue(nIndex)
```

Description

Use this method to return the attribute value for the *nth* attribute of the IBInfo object as a string.

Note

This method can be used for content-based routing only, typically in your implementation of the `IRouter.OnRouteSend` or `IRouter.OnRouteReceive` methods.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which attribute in the IBInfo object.

Returns

A string populated with the attribute value.

Example

```
&AttrValue = &MSG.IBInfo.GetAttributeValue(&i);
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.
- [GetAttributeName method: IBInfo class](#)
- [GetNumberOfAttributes method: IBInfo class](#)

GetContainerAttributeName method: IBInfo class

Syntax

```
GetContainerAttributeName(nIndex)
```

Description

Use this method to return the attribute name for the *n*th container attribute of the IBInfo object as a string.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which container attribute in the IBInfo object.

Returns

A string populated with the container attribute name.

Related Topics

- [AddContainerAttribute method: IBInfo class](#)
- [GetContainerAttributeValue method: IBInfo class](#)
- [GetNumberOfContainerAttributes method: IBInfo class](#)

GetContainerAttributeValue method: IBInfo class

Syntax

```
GetContainerAttributeValue(nIndex)
```

Description

Use this method to return the attribute value for the *n*th container attribute of the IBInfo object as a string.

Parameters

Parameter	Description
<i>nIndex</i>	An integer specifying which container attribute in the IBInfo object.

Returns

A string populated with the container attribute value.

Related Topics

- [AddContainerAttribute method: IBInfo class](#)
- [GetContainerAttributeName method: IBInfo class](#)
- [GetNumberOfContainerAttributes method: IBInfo class](#)

GetNumberOfAEAttributes method: IBInfo class

Syntax

```
GetNumberOfAEAttributes()
```

Description

Use this method to return the number of Application Engine handler attributes in the Message object. For example, the response application class can use this method to retrieve the number of attributes before retrieving the attribute name-value pairs.

Parameters

None.

Returns

An integer representing the number of Application Engine handler attributes.

Related Topics

- [AddAEAttribute method: IBInfo class](#)
- [GetAEAttributeName method: IBInfo class](#)
- [GetAEAttributeValue method: IBInfo class](#)

GetNumberOfAttributes method: IBInfo class

Syntax

```
GetNumberOfAttributes()
```

Description

Use this method to get the number of attributes for the IBInfo object as an integer.

Note

This method can be used for content-based routing only, typically in your implementation of the `IRouter.OnRouteSend` or `IRouter.OnRouteReceive` methods.

Parameters

None.

Returns

An integer representing the number of attributes for the IBInfo object.

Example

```
For &i = 1 To &MSG.IBInfo.GetNumberOfAttributes()  
    &AttrName = &MSG.IBInfo.GetAttributeName(&i);  
    &AttrValue = &MSG.IBInfo.GetAttributeValue(&i);  
End-For;
```

Related Topics

- [Content-Based Routing](#)
With PeopleSoft Integration Broker, you typically define the routing information separately from the message itself. This allows you to apply multiple routings to a message and change the routings independent of the message definition.
- [GetAttributeName method: IBInfo class](#)
- [GetAttributeValue method: IBInfo class](#)

GetNumberOfContainerAttributes method: IBInfo class

Syntax

```
GetNumberOfContainerAttributes()
```

Description

Use this method to return the number of container attributes in the IBInfo object.

Parameters

None

Returns

An integer representing the number of container attributes.

Example

```
&MSG = CreateMessage(Operation.FLIGHTPLAN);

&ret = &MSG.IBInfo.AddContainerAttribute("MESSAGE_STATUS", "good");
&ret = &MSG.IBInfo.AddContainerAttribute("MyAttribute", "abcd");

/* When attempting to read these attributes within an IB event (OnNotify, */
/* OnRequest etc.) one must first get a part rowset, this will load up the */
/* attributes into the message object from the xml. Here is an example of */
/* how to read the attributes from a message. */

&RS = &MSG.GetPartRowset(1);
&index = &MSG.IBInfo.GetNumberOfContainerAttributes();

For &i = 1 To &index
    &attrName = &MSG.IBInfo.GetContainerAttributeName(&i);
    &attrValue = &MSG.IBInfo.GetContainerAttributeValue(&i);
End-For;
```

Related Topics

- [AddContainerAttribute method: IBInfo class](#)
- [GetContainerAttributeName method: IBInfo class](#)
- [GetContainerAttributeValue method: IBInfo class](#)

GetTransactionIDforAE method: IBInfo class

Syntax

```
GetTransactionIDforAE()
```

Description

Use this method to get the transaction ID from within Application Engine program.

Parameters

None.

Returns

A number representing the transaction ID from within Application Engine program.

Related Topics

- [AddAEAttribute method: IBInfo class](#)

InsertAEResponseAttributes method: IBInfo class

Syntax

```
InsertAEResponseAttributes()
```

Description

Use this method to save and transfer the Application Engine handler attributes to be read by the response application class.

Parameters

None.

Returns

A Boolean value: True if the save and insertion were successful, False otherwise.

Related Topics

- [AddAEAttribute method: IBInfo class](#)

LoadConnectorProp method: IBInfo class

Syntax

```
LoadConnectorProp(ConnectorName)
```

Description

Use the LoadConnectorProp method to load connector properties to the specified connector. The properties are contained in the message executing the method.

Note

Use this method in the message OnSend event.

Parameters

Parameter	Description
<i>ConnectorName</i>	Specify the name of the connector that you want to load properties for from the message.

Returns

A Boolean value: true if properties are loaded successfully, false otherwise.

Example

```
LOCAL MESSAGE &MSG;  
&MSG = %IntBroker.GetMessage();  
&Rowset = &MSG.GetRowset();  
&MSG.IBInfo.LoadConnectorProp("HTTP TargetConnector");  
/* add connector properties */  
&MSG.IBInfo.ConnectorOverride= true;  
ReturnToServer(&MSG);
```

Related Topics

- [ConnectorOverride property: IBInfo class](#)
- PeopleCode Language Reference: ReturnToServer function

LoadConnectorPropFromNode method: IBInfo class

Syntax

LoadConnectorPropFromNode(*NodeName*)

Description

Use the LoadConnectorPropFromNode method to load connector properties into the message executing the method. Then you can use the LoadConnectorProp method to load the specified connector with the properties.

Note

Use this method in the message OnSend event.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the node that contains the connector properties you want to use. You can either specify the node name as a string, or prefix the node name with the reserved word Node.

Returns

A Boolean value: true if the properties are loaded successfully, false otherwise.

Related Topics

- [ConnectorOverride property: IBInfo class](#)
- PeopleCode Language Reference: ReturnToServer function

LoadConnectorPropFromRouting method: IBInfo class

Syntax

```
LoadConnectorPropFromRouting(RoutingDefnName)
```

Description

Use the `LoadConnectorPropFromRouting` method to load connector properties into the message executing the method. Then you can use the `LoadConnectorProp` method to load the specified connector with the properties.

Parameters

Parameter	Description
<i>RoutingDefnName</i>	Specify the routing definition name that contains the connector properties you want to use, as a string.

Returns

A Boolean value: true if the method completes successfully, false otherwise.

Related Topics

- [LoadConnectorProp method: IBInfo class](#)
- [LoadConnectorPropFromNode method: IBInfo class](#)

LoadConnectorPropFromTrx method: IBInfo class

Syntax

```
LoadConnectorPropFromTrx(NodeName, TransactionType, MsgName, MsgVersion)
```

Description

Note

This method is no longer supported.

LoadRESTHeaders method: IBInfo class

Syntax

```
LoadRESTHeaders()
```

Description

Use this method to load the headers defined on the appropriate routing for a REST-based service operation. Once loaded, the headers can be modified without specifying the connector override property.

The LoadRESTHeaders method is simply a way to pre-load the headers that you have defined on the Service Operation via the Routing Header Properties tab. Any response or request headers from a third party simply need to read those off the IBConnectorInfo object.

Parameters

None.

Returns

A Boolean value: True if the method executed successfully, False otherwise.

Note

The connector override property does not need to be set when using LoadRESTHeaders.

Example

The following example demonstrates how you can modify HTTP headers through PeopleCode. In this example, the request on the subscribing node (the consumer) is modified.

Note

No HTTP properties are currently applicable for REST and will be removed by Integration Broker.

```
&request = CreateMessage(Operation.MAPS_GET);

&bRet = &request.IBInfo.LoadRESTHeaders();

/* Add any additional headers not defined on the routing */
&bRet = &request.IBInfo.IBConnectorInfo.AddConnectorProperties("Content-=>
Language", "eng", %HTTPHeader);
```

The following example demonstrates how you can add HTTP headers to a REST-based service operation response within an OnRequest event:

```
&response = CreateMessage(Operation.WEATHERSTATION_GET, %IntBroker_Response);

&bRet = &response.IBInfo.LoadRESTHeaders();

/* Add or modify additional headers not defined on the routing */
&bRet = &response.IBInfo.IBConnectorInfo.AddConnectorProperties("Content-=>
```

```
Language", "eng", %HTTPHeader);
```

```
Return &response;
```

Related Topics

- [ConnectorOverride property: IBInfo class](#)

SetAttachmentProperty method: IBInfo class

Syntax

```
SetAttachmentProperty(Content_ID, Property_Type, Value)
```

Description

Use the SetAttachmentProperty to specify the value and type of a property associated with an attachment.

Parameters

Parameter	Description
<i>Content_ID</i>	Specify the content ID associated with the attachment.
<i>Property_Type</i>	Specify the type of property. See below for the valid values.
<i>Value</i>	Specify the value associated with this property.

For the *Property_Type* parameter, the valid values are:

Constant Value	Description
%Attachment_Encoding	Specify the encoding type.
%Attachment_Type	Specify the attachment type.
%Attachment_URL	Specifies the URL for the attachment. The URL must be an absolute URL.
%Attachment_Base	Specify the attachment base.
%Attachment_Location	Specify an additional location for the attachment.
%Attachment_Disposition	Specifies the disposition of the attachment, whether it's displayed inline or as an attachment.
%Attachment_Description	Specifies the description of the attachment.

Returns

A Boolean value: true if the property is set successfully, false otherwise.

Example

The following example shows sending an attachment with an asynchronous message:

```
Local Message &MSG;
Local Rowset &FLIGHT_PROFILE;
Local String &Attachment_Id;
Local Boolean &Test;
Local IntBroker &IntBroker;

QE_FLIGHTDATA.QE_ACNUMBER.Value = QE_FLIGHTDATA.QE_ACNUMBER + 1;

&FLIGHT_PROFILE = GetLevel0();

&MSG = CreateMessage(Operation.ASYNC_RR);

&Attachment_Id = &MSG.IBInfo. AddAttachment("C:\\temp\\MyFile.txt");
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,
%Attachment_Encoding,⇒
    "UTF-8");
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id, %Attachment_Base,⇒
    "Standard");
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,
%Attachment_Disposition,⇒
    "Pending");
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,
%Attachment_Language,⇒
    "English");
&Test = &MSG.IBInfo.SetAttachmentProperty(&Attachment_Id,
%Attachment_Description,⇒
    "Parts data");

&MSG.CopyRowset(&FLIGHT_PROFILE);

&IntBroker = %IntBroker

&IntBroker.Publish(&MSG);
```

Related Topics

- [GetAttachmentProperty method: IBInfo class](#)

IBInfo Class Properties

In this section, we discuss the IBInfo class properties. The properties are discussed in alphabetical order.

! Important

Depending on the type of transaction and how it is executed by Integration Broker, certain properties may or may not be set on the IBInfo object. To determine which properties are available on the IBInfo object, check the Service Monitor first. If the information is not available there, it will not be available in the IBInfo object.

AppServerDomain property: IBInfo class

Description

This property can be used to set the application server domain for the connector, as a string.

This property is read/write.

CompressionOverride property: IBInfo class

Description

This property can be used to set a compression override for the transaction. This property takes three system constants to set the compression override:

Constant Value	Description
%IntBroker_Compress	Turns compression on for this transaction.
%IntBroker_UnCompress	Turns compression off for this transaction.
%IntBroker_Compress_Reset	Resets compression to use the threshold specified by PSADMIN.

The integration engine compresses and base64-encodes messages destined for the PeopleSoft listening connector on its local integration gateway.

Asynchronous messages are always compressed and base64 encoded when sent to the integration gateway.

For synchronous messages, in PSADMIN you can set a threshold message size above which messages are compressed. With the CompressionOverride property, you can override the message compression setting specified in PSADMIN at the transaction level.

⚠ Warning

Turning compression off can negatively impact system performance when transporting synchronous messages greater than 1 MB. As a result, you should turn off compression only during integration development and testing.

i Note

This property does not affect the compression of messages that the integration gateway sends using its target connectors.

This property is read/write.

Example

```
&MSG.IBInfo.CompressionOverride = %IntBroker_UnCompress;
```

ConnectorOverride property: IBInfo class

Description

This property specifies whether the connector override is specified for the transaction. This property takes a Boolean value: true, override the connector properties, false otherwise.

For REST-based service operations, the LoadRESTHeaders method can be used without the need to explicitly set this property.

This property is read/write.

Related Topics

- [LoadRESTHeaders method: IBInfo class](#)

ConversationID property: IBInfo class

Description

This property returns the conversation ID associated with the request/response message transaction.

This property is read/write.

DeliveryMode property: IBInfo class

Description

This property sets or returns the delivery mode override for the connector as an integer. This property takes one of three system constants to set the delivery mode override:

Constant Value	Description
%IB_DM_BestEffort	Sets the delivery mode to best effort. If the delivery mode is set to best effort, then only one attempt is made to send the message to the destination; there is no attempt to retry the message.
%IB_DM_Guarantee	Sets the delivery mode to guaranteed. This mode automatically invokes retry logic to ensure that the message is successfully sent to a destination. This is the default delivery mode.
%IB_DM_Reset	Resets the delivery mode to the value defined outside the PeopleCode program.

This property is read/write.

Example

```
&int = &MSG.IBInfo.DeliveryMode = %IB_DM_BestEffort;
```

DestinationNode property: IBInfo class

Description

This property returns the name of the destination node that the request was sent to, as a string.

This property is read-only.

ExternalMessageID property: IBInfo class

Description

This property returns the external ID of the message. This property is used in testing, and to resolve duplicate message issues from third-party systems.

This property is read-only.

Example

```
&str = &MSG.IBInfo.ExternalMessageID;
```

ExternalOperationName property: IBInfo class

Description

This property returns the external operation name of the message. This property is used in testing, and to resolve duplicate message issues from third-party systems.

This property is read/write.

ExternalUserName property: IBInfo class

Description

This property returns the external user name associated with the message. This property is used in testing, and to resolve duplicate message issues from third-party systems.

This property is read/write.

ExternalUserPassword property: IBInfo class

Description

This property returns the external user password associated with the message. This property is used in testing, and to resolve duplicate message issues from third-party systems.

This property is read/write.

FinalDestinationNode property: IBInfo class

Description

When the message is passed across several nodes, this property specifies the ultimate target of the message, as a string.

This property is read-only.

FuturePublicationDateTime property: IBInfo class

Description

Use this property to specify when, as a DateTime value, an actual publish of the transaction is to occur.

This property is for use with asynchronous transactions. If a null value or an invalid future date and time is specified, the publish will occur immediately.

This property is read/write.

HTTPSessionId property: IBInfo class

Description

Use the HTTPSessionId property to specify the HTTP session ID, as a string.

This property is read/write.

IBConnectorInfo property: IBInfo class

Description

This property returns a reference to a IBConnectorInfo collection object.

This property is read-only.

InReplyToID property: IBInfo class

Description

Use the InReplyToID property to specify the reply to ID contained in the message.

This property is read/write.

MessageChannel property: IBInfo class

Description

This property references the name of the channel associated with the message definition, as a string.

Note

This property has been desupported and remains for backward compatibility only. Use the IBInfo class MessageQueue property instead.

This property is set in when the message is created.

This property is read-only.

Related Topics

- [ChannelName property: Message class](#)
- [MessageQueue property: IBInfo class](#)

MessageName property: IBInfo class

Description

This property returns the name of the message, as a string.

This property is read-only.

Related Topics

- [Name property: Message class](#)

MessageQueue property: IBInfo class

Description

This property returns the name of the queue associated with the message, as a string.

This property is read-only.

MessageType property: IBInfo class

Description

This property returns the type of the message, as a string.

Note

This property has been desupported and remains for backward compatibility only. Use the IBInfo class OperationType property instead.

See [OperationType property: IBInfo class](#).

Valid types are:

Value	Description
Sync	Indicates that the message is synchronous.

Value	Description
Async	Indicates that the message is asynchronous.
Ping	Indicates that the message is used to test the application server to make sure it is available and accepting requests.

This property is read-only.

MessageVersion property: IBInfo class

Description

This property returns the message version as a number.

This property is read-only.

NodeDN property: IBInfo class

Description

For incoming requests, this property gives the distinguished name (DN) extracted from the certificate authentication process, as a string.

This property is read/write.

NonRepudiationID property: IBInfo class

Description

This property returns the non-repudiation ID as a string. This property is populated with a unique string when the message is published.

This property is only valid with messages that use non-repudiation.

This property is read-only.

Related Topics

- [Integration Broker Administration: Implementing Nonrepudiation](#)

NumberOfAttachments property: IBInfo class

Description

This property returns the number of attachments associated with a message.

This property is read-only.

Related Topics

- [AddAttachment method: IBInfo class](#)

OperationType property: IBInfo class

Description

This property returns the type of the operation, as a string.

This property is read-only.

OperationVersion property: IBInfo class

Description

This property returns the version of the operation, as a string.

This property is read-only.

OrigNode property: IBInfo class

Description

For requests that cross multiple nodes, this property identifies the node that initiated the request as a string.

The OrigNode property returns the originating node of the message. If the message is not going across nodes, the OrigNode and SourceNode properties return the same value. However, if the message is going across nodes, the source node is the node that most recently published the message.

For example, if A publishes to B, then B publishes the message to C, from C's perspective, A is the original node and B is the source node.

This property is read-only.

Related Topics

- [SourceNode property: IBInfo class](#)

OrigProcess property: IBInfo class

Description

This property returns the name of the process where the publish originated, as a string. For example, a message published from the Inventory definitions page would have a process name of INVENTORY DEFIN.

This property is read-only.

OrigTimeStamp property: IBInfo class

Description

This property returns the time stamp that corresponds to the time that the request was created, as a string. For requests that cross nodes, this is the time that the first request was created.

This property is read-only.

OrigUser property: IBInfo class

Description

This property returns the user ID login where the message was initially generated, as a string.

This property is read-only.

PublicationID property: IBInfo class

Description

This property returns the unique identifier for the message, as a string.

Note

This property has been desupported.

RequestingNodeName property: IBInfo class

Description

This property returns the name of the node making the request, as a string.

This property is read/write.

RequestingNodeDescription property: IBInfo class

Description

This property returns the description of the node making the request, as a string.

This property is read/write.

ResponseAsAttachment property: IBInfo class

Description

Use the ResponseAsAttachment property to specify whether the response should be returned as an attachment or inline.

This property is read/write.

SegmentsUnOrder property: IBInfo class

Description

The SegmentUnOrder property is only applicable for asynchronous messages. If you specify the SegmentUnOrder property as true, the receiving node processes the segments in parallel.

This property is read/write.

Related Topics

- [SegmentsByDatabase property: Message class](#)
- [Message Segments](#)
To make processing more efficient, you can divide a large message into pieces using message segments. Generally, you only divide asynchronous messages into segments.

SourceNode property: IBInfo class

Description

This property returns the name of the publishing node as a string.

The OrigNode property returns the originating node of the message. If the message is not going across nodes, the OrigNode and SourceNode properties return the same value. However, if the message is going across nodes, the source node is the node that most recently published the message.

For example, if A publishes to B, then B publishes the message to C, from C's perspective, A is the original node and B is the source node.

This property is read-only.

Related Topics

- [OrigNode property: IBInfo class](#)

SyncServiceTimeout property: IBInfo class

Description

This property takes a time (in seconds). This time overrides the default HTTP timeout that is used for all requests. If you set this property, you can use this to read back the time, that is, set the time before the SyncRequest is executed, then see when it is changed in an implementation of the OnSend method.

Note

This property is only for synchronous requests.

Generally, you use SyncServiceTimeout to dynamically set the timeout value for a specific transaction. The http header file is modified to take this new parameter. In addition this value is sent to the gateway to be used for the http timeout. Use this so that a long running transaction will not timeout. In addition, you don't have to wait through the default period for a specific transaction to timeout.

The following is a typical example of using this property:

```
&MSG.SetXmlDoc(&xmlReq);  
&MSG.IBInfo.LoadConnectorPropFromNode(Node.EAI)  
&MSG.IBInfo.SyncServiceTimeout = 600;  
&MSG.IBInfo.ConnectorOverride = true;  
&MSG_Resp = SyncRequest(&MSG, Node.EAI);  
&xmlResponseDoc = &MSG.GetXmlDoc();
```

Setting the XML directly is not valid. You need to use the message object to set the value. In order for this to work you must override the connector properties, which means you must set up the connector properties for this transaction, using one of the load methods (such as `LoadConnectorPropFromNode`, `LoadConnectorPropFromTrx`, and so on.)

This property is read/write.

TransactionID property: IBInfo class

Description

This property returns the transaction ID as a string. This is used to uniquely identify a request.

This property is read-only.

UserName property: IBInfo class

Description

This property returns the user name associated with the message, as a string.

This property is read-only.

VisitedNodes property: IBInfo class

Description

This property returns an array of string containing the names of all the nodes visited by the message. This is useful when a message is being propagated across multiple nodes.

This property is read-only.

WSA_Action property: IBInfo class

Description

Use this property to specify the Web Services Addressing (WS-Addressing) action for the message. The WS-Addressing action is defined as a string.

This property is read/write.

WSA_FaultTo property: IBInfo class

Description

Use this property to specify the WS-Addressing fault end point for the message. The WS-Addressing fault end point is defined as a string.

If this property is not null, a message ID (the `WSA_MessageID` property) must also be defined.

This property is read/write.

WSA_MessageID property: IBInfo class

Description

Use this property to specify the WS-Addressing message ID for the message. The WS-Addressing message ID is defined as a string.

This property is read/write.

WSA_ReplyTo property: IBInfo class

Description

Use this property to specify the WS-Addressing reply-to address for the message. The WS-Addressing reply-to address is defined as a string.

This property is read/write.

WSA_To property: IBInfo class

Description

Use this property to specify the WS-Addressing destination for the message. The WS-Addressing destination is defined as a string.

This property is read/write.

IBConnectorInfo Collection

A IBConnectorInfo collection object is returned from the IBConnectorInfo IBInfo class property.

Related Topics

- [IBConnectorInfo property: IBInfo class](#)

IBConnectorInfo Collection Methods

In this section, we discuss the IBConnectorInfo collection methods. The methods are discussed in alphabetical order.

AddConnectorProperties method: ConnectorInfo collection

Syntax

```
AddConnectorProperties(Name, Value, Type)
```

Description

Use the AddConnectorProperties method to add a set of connector properties to a connector.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the property as a string.
<i>Value</i>	Specify the value of the property as a string.
<i>Type</i>	Specify the type of the property as a string. The valid values are:
Constant Value	Description
%Property	Add a property type property.
%Header	Add a header type property.

Returns

A Boolean value: true if the connector properties are added successfully, false otherwise.

Example

The following are examples of typical name/value pairs.

```
&b1 = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("URL", "http:⇒  
//finance.yahoo.com/d/quotes.txt/?symbols=PSFT&format=l1c1d1t1", %Property);
```

```
&b2 = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("sendUncompressed", ⇒  
"Y", %Header);
```

```
&b3 = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties("FilePath", ⇒  
"C:\Temp", %Property);
```

The following example demonstrates setting a passive connection for the FTP target connector:

```
&b4 = &MSG.IBInfo.IBConnectorInfo.AddConnectorProperties ("FTPMODE", ⇒  
"PASSIVE", %Property);
```

Related Topics

- [DeleteConnectorProperties method: ConnectorInfo collection](#)
- [ClearConnectorProperties method: ConnectorInfo collection](#)

AddQueryStringArg method: ConnectorInfo collection

Syntax

```
AddQueryStringArg(Name, Value)
```

Description

Use the AddQueryStringArg method to add query string arguments to the outbound request. The query string arguments are used by the HTTP connector to step parameters in the URL.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the query string argument as a string.
<i>Value</i>	Specify the value for the query string argument as a string.

Returns

A Boolean value: true if the query string argument is added successfully, false otherwise.

Related Topics

- [ClearQueryStringArgs method: ConnectorInfo collection](#)
- [DeleteQueryStringArg method: ConnectorInfo collection](#)
- [GetNumberOfQueryStringArgs method: ConnectorInfo collection](#)
- [GetQueryStringArgName method: ConnectorInfo collection](#)
- [GetQueryStringArgValue method: ConnectorInfo collection](#)

ClearConnectorProperties method: ConnectorInfo collection

Syntax

```
ClearConnectorProperties()
```

Description

Use the ClearConnectorProperties method to clear all the properties in a connector before setting them.

Parameters

None.

Returns

None.

Related Topics

- [AddConnectorProperties method: ConnectorInfo collection](#)
- [DeleteConnectorProperties method: ConnectorInfo collection](#)

ClearQueryStringArgs method: ConnectorInfo collection

Syntax

```
ClearQueryStringArgs()
```

Description

Use the ClearQueryStringArgs method to clear all of the existing query string arguments.

Use the DeleteQueryStringArg method if you want to remove a specific query string argument.

Parameters

None.

Returns

None.

Related Topics

- [DeleteQueryStringArg method: ConnectorInfo collection](#)

DeleteConnectorProperties method: ConnectorInfo collection

Syntax

```
DeleteConectorProperties(Name)
```

Description

Use the DeleteConnectorProperties to delete a specific connector property.

Use the ClearConnectorProperties method to remove all the properties.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the connector property you want to delete.

Returns

A Boolean value: true if the property is deleted successfully, false otherwise.

Related Topics

- [ClearConnectorProperties method: ConnectorInfo collection](#)

DeleteQueryStringArg method: ConnectorInfo collection

Syntax

```
DeleteQueryStringArg(Name)
```

Description

Use the DeleteQueryStringArg method to delete a specific query string argument.

Use the ClearQueryStringArg method to delete all of the query string arguments.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the query string argument that you want to delete.

Returns

A Boolean value: true if the query string argument is deleted successfully, false otherwise.

Related Topics

- [ClearQueryStringArgs method: ConnectorInfo collection](#)

GetConnectorPropertiesName method: ConnectorInfo collection

Syntax

```
GetConnectorPropertiesName(Index)
```

Description

Use the GetConnectorPropertiesName to return the name of the connector property in the numeric position specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the connector property name that you want to access.

Returns

A string containing the name of a connector property.

Example

```
For &I = 1 to &Msg.IBInfo.IBConnectorInfo.GetNumberOfConnectorProperties();  
    &PropName = &Msg.IBInfo.IBConnectorInfo.GetConnectorPropertiesName(&I)  
    /* do processing */  
End-For;
```

GetConnectorPropertiesType method: ConnectorInfo collection

Syntax

```
GetConnectorPropertiesType(Index)
```

Description

Use the GetConnectorPropertiesType method to return the type of the connector property specified by its numeric position by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the connector property type that you want to access.

Returns

A string containing the type of the specified connector.

GetConnectorPropertiesValue method: ConnectorInfo collection

Syntax

```
GetConnectorPropertiesValue(Index)
```

Description

Use the GetConnectorPropertiesValue method to return the value of the connector property specified by its numeric position by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the connector property type that you want to access.

Returns

A string containing the value of the specified connector.

GetNumberOfConnectorProperties method: ConnectorInfo collection

Syntax

```
GetNumberOfConnectorProperties()
```

Description

Use the GetNumberOfConnectorProperties method to determine the number of connector properties.

Parameters

None.

Returns

A number.

GetNumberOfQueryStringArgs method: ConnectorInfo collection

Syntax

```
GetNumberOfQueryStringArgs()
```

Description

Use the `GetNumberOfQueryStringArgs` method to determine the number of query string arguments.

Parameters

None.

Returns

A number.

GetQueryStringArgName method: ConnectorInfo collection

Syntax

```
GetQueryStringArgName(Index)
```

Description

Use the `GetQueryStringArgName` method to access the name of the query string argument by its numeric position as specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the query string argument name that you want to access.

Returns

A string containing the name of a query string argument.

GetQueryStringArgValue method: ConnectorInfo collection

Syntax

```
GetQueryStringArgValue(Index)
```

Description

Use the `GetQueryStringArgValue` method to access the value of the query string argument by its numeric position as specified by *Index*.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the query string argument value that you want to access.

Returns

A string containing the value of a query string argument.

IBConnectorInfo Collection Properties

In this section, we discuss the IBConnectorInfo collection properties. The properties are discussed in alphabetical order.

ConnectorClassName property: ConnectorInfo collection

Description

Use this property to identify the name of the target connector to invoke as a string.

This property is read/write.

ConnectorName property: ConnectorInfo collection

Description

Use this property to identify the target connector to invoke to send to the message, as a string.

This property is read/write.

Cookies property: ConnectorInfo collection

Description

Use this property to access the cookies associated with a message.

You can accept a synchronous response message containing cookies, save those cookies in a global variable, and later return them to the target node in an outbound synchronous or asynchronous request message.

You can access this property only in an inbound synchronous response message or an outbound request message.

This property is read/write.

Example

The following example retains the cookies from a response message to a global variable:

```
Local Message &SalesRequest, &SalesResponse;  
Local Rowset &SALES_ORDER;  
Global string &SalesCookies;  
&SALES_ORDER = GetLevel0();
```

```
&SalesRequest = CreateMessage(OPERATION.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);
/* Send the synchronous request; the return value is the response
message object */
&SalesResponse = &SalesRequest.SyncRequest();
/* Retrieve cookies from the response message */
&SalesCookies = &SalesResponse.IBInfo.IBConnectorInfo.Cookies;
```

The following example retrieves the previously retained cookies from the global variable and inserts them into a new request message:

```
Local Message &SalesRequest, &SalesResponse;
Local Rowset &SALES_ORDER;
Global string &SalesCookies;
&SALES_ORDER = GetLevel0();
&SalesRequest = CreateMessage(Message.SALES_ORDER_SYNC);
&SalesRequest.CopyRowsetDelta(&SALES_ORDER);
/* Insert the cookies in the request message */
&SalesRequest.IBInfo.IBConnectorInfo.Cookies = &SalesCookies;
/* Send the asynchronous request */
%IntBroker.Publish(&SalesRequest);
```

PathInfo property: ConnectorInfo collection

Description

This property is specific to incoming HTTP requests. This is the path information extracted from the request, represented as a string.

This property is read/write.

RemoteFrameworkURL property: ConnectorInfo collection

Description

Use this property to identify the URL to which to send a message, as a string. This value overrides the server URL specified in the Project Definitions section.

This property is read/write.

Optimization PeopleCode

Using Optimization PeopleCode on the Application Server

While running optimization PeopleCode on the application server, ensure that changed data is committed to the database before calling the CreateOptEngine optimization function and the following OptEngine class methods:

- RunSynch
- RunAsynch
- CheckOptEngineStatus
- ShutDown
- SetTraceLevel
- GetTraceLevel
- InsertOptProblnst
- DeleteOptProblnst

Note

The PeopleCode functions CommitWork and DoSaveNow can be called within a step to save uncommitted data to the database before calling the listed functions and methods. Keep in mind that forcing a commit on pending database updates is a serious step; it prevents roll-back on error. CreateOptEngine, ShutDown, InsertOptProblnst, and DeleteOptProblnst calls modify the database, so take care when terminating the Application Engine program without committing the changes made by those calls.

Using Optimization PeopleCode in an Application Engine Program

When you write an optimization PeopleCode program in an Application Engine program and you schedule it in PeopleSoft Process Scheduler, you must set the process definition with a process type of *Optimization Engine*. Other process types do not allow optimization PeopleCode in Application Engine programs.

While using optimization PeopleCode in Application Engine programs, make sure data is committed before calling the CreateOptEngine optimization function and the following OptEngine class methods:

- RunSynch
- RunAsynch

- CheckOptEngineStatus
- ShutDown
- SetTraceLevel
- GetTraceLevel
- InsertOptProblnst
- DeleteOptProblnst

Note

You can call the PeopleCode functions CommitWork and DoSaveNow within a step to save uncommitted data to the database before calling the listed functions and class methods. Keep in mind that forcing a commit on pending database updates is a serious step; it prevents roll-back on error. CreateOptEngine, ShutDown, InsertOptProblnst, and DeleteOptProblnst calls modify the database, so take care when terminating the Application Engine program without committing the changes made by those calls.

Performing Optimization in PeopleCode

This section discusses how to perform optimization in PeopleCode using analytic instances.

Important

The optimization PeopleCode classes are not supported on IBM z/OS and Linux for IBM System z platforms.

Creating New Analytic Instances

To create a new analytic instance for an analytic type:

1. Call the function InsertOptProblnst with the analytic type and analytic instance as parameters to create an analytic instance ID.
2. Use Application Engine or a similar mechanism to load the optimization application tables with data.

Use the analytic instance ID as the key value in scenario-managed optimization application tables.

The analytic instance is now ready to be loaded into an analytic server.

Note

You can load multiple copies of the same analytic instance into multiple instances of an analytic server, provided that each instance of the analytic server resides in a different application server domain. Each analytic instance loaded into a given domain must be unique. Within a given domain, you cannot have the same analytic instance in more than one analytic server. The analytic server maintains data integrity by checking to see if the data has been altered by another user (refer to the steps in the optimization system architecture description). Try to maintain data consistency when the same analytic instance uses the same database in different domains.

Related Topics

- Optimization Framework: PeopleSoft Optimization Framework System Architecture
- [InsertOptProblnst function](#)

Loading Analytic Instances Into an Analytic Server

Use the `CreateOptEngine` function to load an analytic server with an analytic instance. It takes analytic instance ID and a mode parameter with `%Synch` and `%Asynch` as possible values and returns a PeopleCode object of type `OptEngine`.

You can run the PeopleCode on the application server or from Application Engine.

Loading Analytic Instances by Running PeopleCode on the Application Server

To block PeopleCode from running on the application server until the load is done (synchronous mode), use the `%Synch` value for the mode parameter. An error is generated if the load isn't successful. The application server imposes a timeout beyond which the PeopleCode and optimization engine load are terminated. Here is a code example:

```
Local OptEngine &myopt;  
&myopt = CreateOptEngine("PATSMITH", %Synch);
```

To load the analytic server without blocking the PeopleCode from running (asynchronous mode) on the application server, use the `%Asynch` value for the mode parameter. The analytic server performs a preliminary check of the load request and returns the `OptEngine` object if it is successful or an error if it is unsuccessful. A successful return does not mean that the load was successful. You must then use repeated `CheckOptEngineStatus` methods on the returned `OptEngine` object to determine whether the analytic engine is done with the load and whether it was successful. Here is a code example:

```
Local OptEngine &myopt;  
&myopt = CreateOptEngine("PATSMITH", %Asynch);
```

Loading Analytic Instances by Running PeopleCode in Application Engine

Both synchronous (`%Synch`) and asynchronous (`%Asynch`) modes block the PeopleCode from running on Application Engine until the load is done. Use only `%Asynch` while loading an optimization engine.

The absolute number of optimization engine instances that may be loaded in a given domain is governed by a configuration file loaded by Tuxedo during its domain startup.

Related Topics

- [CheckOptEngineStatus method: OptEngine class](#)

Running Optimization Transactions

You send an optimization transaction to the optimization engine using the RunSynch and RunAsynch methods. Both are methods on an OptEngine object. The OptEngine object can be created either by calling CreateOptEngine (if the optimization engine is not loaded already) or by calling GetOptEngine (if the optimization engine is already loaded). Both RunSynch and RunAsynch have the same signature, except that RunSynch runs the optimization transaction in synchronous mode and RunAsynch runs it in asynchronous mode. Both return an integer status code. You can run transactions either on the application server or with Application Engine.

To invoke an optimization transaction:

1. Use the GetOptEngine function to get the OptEngine object as a handle for the optimization engine that has loaded an analytic instance ID.

Use the CreateOptEngine function to create the OptEngine object for a new optimization engine if the analytic instance has not been loaded.

2. Call RunSynch or RunAsynch to send an optimization transaction to the optimization engine to be run in synchronous or asynchronous mode.
3. If the transaction is run in synchronous mode (RunSynch), use the OptEngine methods GetString, GetNumber, and so on, to retrieve the output result from the optimization transaction.

The transaction names, parameter names, and data types are viewable in the analytic type in Application Designer.

4. If the transaction is run in asynchronous mode, use the OptEngine method CheckOptEngineStatus to check the status of the optimization transaction in the optimization engine.

After the transaction is done, result data is available in the database for retrieval using standard PeopleCode mechanisms.

Running Optimization Transactions from the Application Server

To block the PeopleCode from running on the application server until the optimization transaction is done (synchronous mode) and receives the results, use RunSynch to send an optimization transaction. An error status code is returned if the transaction isn't successful. If successful, you can use other methods to retrieve the results from the transaction call. The application server imposes a timeout beyond which the PeopleCode and optimization engine transaction are terminated.

To run a transaction without blocking PeopleCode from running (asynchronous mode) on the application server, use RunAsynch to send an optimization transaction. In this mode, the optimization engine performs a preliminary check of the transaction request and returns a success or failure status code. A successful return does not mean that the transaction is successful; it means only that the syntax is correct. You must then use repeated calls to the CheckOptEngineStatus method on the OptEngine object to determine whether the optimization engine is done with the transaction and whether it is successful.

RunAsynch does not allow transaction output results to be returned. Use this method for long-running transactions that return results entirely through the database.

Running Optimization Transactions from Application Engine

Both synchronous (RunSynch) and asynchronous (RunAsynch) methods block the PeopleCode from running on Application Engine until the optimization transaction is done. RunSynch allows output results to be returned, but it should be used for transactions that are fast (less than 10 seconds). RunAsynch does not have a time limit, but it does not return output results.

Related Topics

- [RunAsynch method: OptEngine class](#)

Invoking the Optimization PeopleCode Plug-In

If you're developing an optimization application that uses the Optimization PeopleCode plug-in, you must do the following to invoke the plug-in:

- Develop a PeopleCode application class that extends the PT_OPT_BASE:OptBase class.
- Define methods in your application class that use the PeopleCode OptInterface class to perform your optimization functions.
- Define an analytic type that specifies the Optimization PeopleCode plug-in, by selecting the **PeopleCode Plugin** check box in the analytic type properties.
- In the analytic type properties, specify the application package and application class that you developed.
- Define transactions in your analytic type definition that correspond to the methods you developed in your application class, with corresponding parameters.

Related Topics

- Optimization Framework: Creating Analytic Type Definitions
- [CreateOptInterface function](#)
- [OptBase Application Class](#)
This PeopleCode application class is part of the PT_OPT_BASE application package. It establishes the basic framework for developing PeopleCode that invokes the Optimization PeopleCode plug-in. To use the plug-in, you develop a application class that extends the OptBase application class. OptBase contains the following types of methods:
- [OptInterface Class Methods](#)
This section discusses the optimization methods for the OptInterface PeopleCode class. The methods are listed in alphabetical order.

Shutting Down Optimization Engines

Use the GetOptEngine function to get the OptEngine object as a handle for the optimization engine that loaded an analytic instance ID.

Use the OptEngine method named ShutDown to shut down the optimization engine. This ends the optimization engine process with the current analytic instance ID. Based on application server settings, the system restarts a new, unloaded optimization engine process that can be loaded with any other analytic instance.

Related Topics

- [ShutDown method: OptEngine class](#)

Deleting Existing Analytic Instances

To delete an existing analytic instance for an analytic type:

1. Shut down any optimization engines that have this analytic instance currently loaded.
2. Using Application Engine or a similar mechanism, delete the data in the optimization application tables pertaining to that analytic instance.

Use the analytic instance ID as the key value to find and delete analytic instance rows from scenario-managed optimization application tables.

3. Use the function `DeleteOptProblnst` with the analytic type and analytic instance as arguments to delete the analytic instance ID from PeopleTools metadata.

Note

If you try to delete an existing analytic instance that is loaded in a running optimization engine, `DeleteOptProblnst` returns `%OptEng_Fail`, and the optional status reference parameter is set to `%OptEng_Exists`.

Related Topics

- [DeleteOptProblnst function](#)

Programming for Database Updates

You must plan for uncommitted database changes in your optimization PeopleCode. The PeopleSoft Optimization Framework detects pending database updates, and generates a failure status if data is not committed to the database before certain optimization methods are called.

This checking for database updates happens in runtime for the `CreateOptEngine` function and the following methods: `RunSync`, `RunAsync`, `Shutdown`, `GetTraceLevel`, and `SetTraceLevel`. Ensure that your PeopleCode performs proper database updates and commits before you execute these methods. If you use the optional parameter for detailed status that is available for these functions, or the `DetailedStatus` property that is available for the methods, you can check for the status of `%OptEng_DB_Updates_Pending` to see if there is a pending database update.

Note

The pending database update may have happened considerably earlier in the code. Forcing a commit within your PeopleCode to avoid this problem prevents roll-back on database error. Forcing a commit should be used with care.

The `InsertOptProblnst` and `DeleteOptProblnst` functions can be called only inside `FieldChange`, `PreSaveChange` and `PostSaveChange` PeopleCode events, and in Workflow.

This database update checking happens in compile time for the following functions: `InsertOptProblnst` and `DeleteOptProblnst`. Make sure that there are no pending database updates before you execute these methods.

Using Lights-Out Mode with Optimization

This section provides an overview of lights-out mode, and discusses how to create and edit messages.


Understanding Lights-out Mode

Some optimization applications can take several hours to run. These are typically run as overnight batch jobs every night when the work load is small to regenerate the optimization solution and have it ready for end users to use in the morning hence the term *lights-out mode*.

In the current release, application messages communicate between the Application Engine batch job and the online optimization engine. After the Application Engine job completes and the optimization solution has been written to the database, an application message initiates the download of the data from the database batch job to the online optimization engine.

Lights-out mode uses an Application Engine PeopleCode program within PeopleSoft Process Scheduler to send requests to an application server and receive responses from it. Within the application server, the OnRequest PeopleCode runs an optimization engine process.

This diagram illustrates the lights-out process:

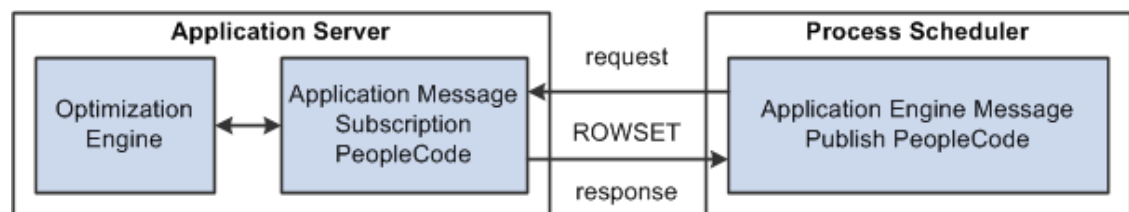

This request and response is in the form of a rowset as shown by the example supplied with optimization, the OPT_CALL message. Also supplied as an example is an Application Engine message publish PeopleCode program called PT_OPTCALL.

! Important

Application Engine includes an action of type *Log Message*, which PeopleSoft Process Scheduler uses to record its activity in the PS_MESSAGE_LOG table. The PeopleCode MessageBox and WinMessage built-in functions also record their activity in the PS_MESSAGE_LOG table.

During lights-out optimization, these processes can conflict with each other or with the optimization engine when one process locks a row of the table, and another process tries to access the same row.

To prevent this conflict, pay close attention to where the MessageBox or WinMessage built-in functions are used in your Application Engine PeopleCode. In general, there can't be any outstanding database updates pending when communicating with the optimization engine using application messages.

The OPT_CALL Message

The OPT_CALL message is an example of what the lights-out process uses as the message for optimization. The OPT_CALL message has a structure using a record, PT_OPTPARMS, having the fields PARMKEY and VALUE which represent a name/value pair. These send requests and responses from the Application Engine PeopleCode in PeopleSoft Process Scheduler to and from the message OnRequest PeopleCode in the application server.

The OPT_CALL message also uses a record, PT_OPTDETMSGS, which contains the information needed for processing a detailed message.

This is an example of the Message Definition page (select **PeopleTools**, and then **Integration Broker**, and then **Integration Setup**, and then **Message Definitions**) showing the OPT_CALL message definition:

This example illustrates the fields and controls on the Message Definition page – OPT_CALL message definition. You can find definitions for the fields and controls later on this page.

Message Definition

Schema

Warning: [Structure references work records.](#)

Message: OPT_CALL

Version: VERSION_1

Description:

Owner ID:

Comments:

[Explanation](#)

Schema Exists: No

☐ Part Message

☐ Exclude Description in Schema

☐ Single Level 0 Row

☐ Include Namespace

☐ Suppress Empty XML Tags

Message Type

☒ Rowset-based

☐ Nonrowset-based

☐ Container

[Service Operation References](#)

[View Records Only](#) [View Included Fields Only](#) [Add Record to Root](#)

Left | Right

OPT_CALL

PT_OPTDETMSGS

PT_OPTPARMS

PARMKEY

PTVALUE

Save

Save As

[Return to Search](#)

The OPT_CALL message is associated with the OPT_CALL service operation. The OPT_CALL service operation defines the OPT_CALL application package as a handler. This application package implements the Integration Broker methods needed to handle any messaging PeopleCode.

Creating a Request Message

This section provides an overview of the request message and describes how to create messages that:

- Create an optimization engine.
- Check optimization engine status.
- Run an optimization engine transaction.
- Set the trace level.
- Get the trace level.
- Shutdown an optimization engine.

Understanding the Request Message

For optimization, the Application Engine PeopleCode in PeopleSoft Process Scheduler sends a request OPT_CALL message. The message uses rowsets built from PT_OTPARMS records as the request. You can use the following rowset structures as an example of how to perform certain optimization actions, by sending them as requests from the application engine program in the process scheduler to the message notification PeopleCode in the application server.

Creating an Optimization Engine

To create an optimization engine, structure the rowset as follows, using the PT_OTPARMS record. You set key values using the PARMKEY field, and then set a value for that key field in the VALUE field.

PARMKEY Field	VALUE Field
OPTCMD	CREATE Causes the PeopleCode program implementing the Integration Broker OnRequest method to load an optimization engine. The OPT_CALL example executes the CreateOptEngine function.
PROBINST	The name of the analytic instance.
PROCINSTANCE	The name of the process instance for this process scheduler job.
SYNCH	Y if this optimization engine load is to occur synchronously, N if asynchronously.

Checking Optimization Engine Status

To check optimization engine status (for example, to see when it finishes loading), structure the rowset as follows, using the PT_OTPARMS record.

PARAMKEY Field	VALUE Field
OPTCMD	CHECK_STATUS Causes the PeopleCode program implementing the Integration Broker OnRequest method to check the status of an optimization engine. The OPT_CALL example executes the CheckOptEngineStatus function.
PROBINST	The name of the analytic instance.
PROCINSTANCE	The name of the process instance for this process scheduler job.

Running a Transaction

To run a transaction, structure the rowset as follows, using the PT_OTPPARMS record.

PARAMKEY Field	VALUE Field
OPTCMD	RUN Causes the PeopleCode program implementing the Integration Broker OnRequest method to run an optimization transaction. The OPT_CALL example executes the GetOptEngine method and either the RunSynch or RunAsynch method.
PROBINST	The name of the analytic instance.
PROCINSTANCE	The name of the process instance for this process scheduler job.
SYNCH	Y for a synchronous transaction, N for asynchronous.
TRANSACTION	The name of the transaction to run.
The names of one or more transaction parameters.	The value of each named transaction parameter.

Setting the Trace Level

To set a trace level, structure the rowset as follows, using the PT_OTPPARMS record.

PARAMKEY Field	VALUE Field
OPTCMD	SET_TRACE_LEVEL Causes the PeopleCode program implementing the OnRequest Integration Broker method to set the severity level at which events will be logged for an optimization engine. The OPT_CALL example executes the SetTraceLevel method.
PROBINST	The name of the analytic instance.
PROCINSTANCE	The name of the process instance for this process scheduler job.

PARMKEY Field	VALUE Field
COMPONENT	One of the following values: • %Opt_Engine server activity of the running optimization engine. • %Opt_Utility low level elements that support the running optimization engine. • %Opt_Datacache the in-memory database cache. • %Opt_Plugin the plug-in being used for the running optimization engine.
SEVERITY_LEVEL	The severity level to log. The following list starts with the most severe level; the level you specify includes all higher levels. For example, if you specify %Severity_Error, it logs %Severity_Fatal, %Severity_Status, and %Severity_Error messages and filters out the others. • %Severity_Fatal • %Severity_Status • %Severity_Error • %Severity_Warn • %Severity_Info • %Severity_Trace1 • %Severity_Trace2

Getting the Trace Level

To get a trace level, structure the rowset as follows, using the PT_OPTPARMS record.

PARMKEY Field	VALUE Field
OPTCMD	GET_TRACE_LEVEL Causes the PeopleCode program implementing the OnRequest Integration Broker method to get the severity level at which events will be logged for an optimization engine. The OPT_CALL example executes the GetTraceLevel method.
PROBINST	Set to the name of the analytic instance.
PROCINSTANCE	Set to the name of the process instance for this process scheduler job.
COMPONENT	One of the following values: • %Opt_Engine server activity of the running optimization engine. • %Opt_Utility low level elements that support the running optimization engine. • %Opt_Datacache the in-memory database cache. • %Opt_Plugin the plugin being used for the current opt engine.

Shutting Down an Optimization Engine

To shut down an optimization engine, structure the rowset as follows, using the PT_OTPARMS record.

PARAMKEY Field	VALUE Field
OPTCMD	SHUTDOWN Causes the PeopleCode program implementing the OnRequest Integration Broker method to shut down an optimization engine. The OPT_CALL example executes the Shutdown method.
PROBINST	The name of the analytic instance.
PROCINSTANCE	The name of the process instance for this process scheduler job.

Creating a Response Message

This section provides an overview of the response message and describes how to create messages that:

- Send optimization status.
- Send a detailed message.

Understanding the Response Message

For optimization, the message PeopleCode in application server receives the request messages, performs an optimization actions, and sends response OPT_CALL messages. One message uses rowsets built from PT_OTPARMS records, the other uses rowsets from PT_DETMSG records. You can use the rowset structures in the next section (Sending Optimization Status) as an example of how to send responses from the message notification PeopleCode in the application server to the application engine program in the process scheduler.

Sending Optimization Status

To send the status of the optimization functions and methods called within the PeopleCode program implementing the OnRequest Integration Broker method, structure the rowset as follows using the PT_OTPARMS record. The optimization functions and messages are called in response to the request input message. You set key values using the PARAMKEY field, and then set a value for that key field in the VALUE field.

PARAMKEY Field	VALUE Field
STATUS	The return status of the optimization function or method that is called in the message PeopleCode.
DETAILED_STATUS	The optional detailed status returned by many of the optimization functions and methods.

Sending a Detailed Message

To send a detailed message, structure the rowset as follows, using the PT_DETMSG record. You set key values using the PARMKEY field, and then set a value for that key field in the VALUE field.

PARMKEY Field	VALUE Field
MSGSET	The message set number. In the case of optimization, the message set number is 148.
MSGNUM	The name of the detailed message.
PARMCOUNT	The number of message parameters for the detailed message. There can be up to five parameters.
MSGPARAM1	The first parameter value.
MSGPARAM2	The second parameter value.
MSGPARAM3	The third parameter value.
MSGPARAM4	The fourth parameter value.
MSGPARAM5	The fifth parameter value.

Editing the Request PeopleCode

The PT_OPTCALL Application Engine program serves as a template. It is delivered with all the sections marked as inactive. You can edit the program to suit your needs, then mark the appropriate sections active before running it. You can also use the program as a guide to creating your own Application Engine program.

The program uses these steps to send request messages to perform the following tasks:

1. Load the optimization engine.
2. Wait for the optimization engine load to finish.
3. Run an optimization transaction against the loaded optimization engine.
4. Wait for the optimization transaction to finish running.
5. Set the trace level.
6. Get the trace level.
7. Shut down the optimization engine.

You can edit steps 1 and 3 to run an optimization transaction. You can also use the entire program as a template to create your own Application Engine program.

Loading an Optimization Engine

In step 1, enter the name of your analytic instance. In this example, the name of the analytic instance is *FEMALE1*.

If you have multiple domains, enter the local node name and the machine name and port number for your application server. In this case, the local node name is *%Local/Node* and the machine name and port number are *foo111111:9000*.

```
Local Message &MSG;
Local Message &response;
```



```

Component string &probid;
Component string &isSync;
Component string &procinst;
Local integer &nInst;
Local string &url;

Local Rowset &rs;
Local Row &row;
Local Record &rec;

Local string &stName;
Local integer &stVal;

&MSG = CreateMessage(OPERATION.OPT_CALL);
&rs = &MSG.GetRowset();

&row = &rs.GetRow(1);
&rec = &row.GetRecord(Record.PT_OTPARMS);
&rec.PARMKEY.Value = "OPTCMD";
&rec.VALUE.Value = "CREATE";

&rs.InsertRow(1);
&rec = &rs.GetRow(2).PT_OTPARMS;
&rec.PARMKEY.Value = "PROBINST";
&rec.VALUE.Value = "FEMALE1";
&probid = "FEMALE1";

&rs.InsertRow(2);
&rec = &rs.GetRow(3).PT_OTPARMS;
&rec.PARMKEY.Value = "PROCINSTANCE";
&nInst = Record.PT_OPT_AET.PROCESS_INSTANCE.Value;
&rec.VALUE.Value = String(&nInst);
&procinst = String(&nInst);

&rs.InsertRow(3);
&rec = &rs.GetRow(4).PT_OTPARMS;
&rec.PARMKEY.Value = "SYNCH";
&rec.VALUE.Value = "N";
&isSync = "N";
/* Specify the Application Server domain URL (foo111111:9000 in this example)
*/
&response = %IntBroker.SyncRequest(%LocalNode, "///foo111111:9000 e");

If &response.ResponseStatus = 0 Then
    &stName = &response.GetRowset().GetRow(1).GetRecord(Record.PT_OTPARMS).Get
Field(Field.PARMKEY).Value;
    &stVal = Value(&response.GetRowset().GetRow(1).GetRecord(Record.PT_
OTPARMS).GetField(Field.VALUE).Value);
    If &stName = "STATUS" And
        &stVal = %OptEng_Fail Then
        /* Check detailed message here */
        throw CreateException(148, 2, "Can not send to OptEngine");
    End-If;
End-If;

```

Running An Optimization Transaction

In step 3, enter the name of your optimization transaction and its parameter name/value pairs. In this example, the transaction name is *TEST_LONG_TRANS*, the first parameter name/value pair is *Delay_in_Secs* and *30*, and the second parameter name/value pair is *Sleep0_Work1* and *0*.

The parameter values are stored as strings. You may need to convert them in the OnRequest PeopleCode.

```
Local Message &MSG;
Local Message &response;

Local Rowset &rs, &respRS;
Local Row &row;
Local Record &rec, &msgRec;

Component string &probid;
Component string &procinst;
Component string &isSync;
Local string &url = "";
Local integer &parmCount, &msgSet, &msgNum;

&MSG = CreateMessage(OPERATION.OPT_CALL);
&rs = &MSG.GetRowset();

&row = &rs.GetRow(1);
&rec = &row.GetRecord(Record.PT_OTPARMS);
&rec.PARMKEY.Value = "OPTCMD";
&rec.VALUE.Value = "RUN";

&rs.InsertRow(1);
&rec = &rs.GetRow(2).PT_OTPARMS;
&rec.PARMKEY.Value = "PROBINST";
&rec.VALUE.Value = &probid;

&rs.InsertRow(2);
&rec = &rs.GetRow(3).PT_OTPARMS;
&rec.PARMKEY.Value = "PROCINSTANCE";
&rec.VALUE.Value = &procinst;

&rs.InsertRow(3);
&rec = &rs.GetRow(4).PT_OTPARMS;
&rec.PARMKEY.Value = "SYNCH";
&rec.VALUE.Value = &isSync;

&rs.InsertRow(4);
&rec = &rs.GetRow(5).PT_OTPARMS;
&rec.PARMKEY.Value = "TRANSACTION";
&rec.VALUE.Value = "TEST_LONG_TRANS";

&rs.InsertRow(5);
&rec = &rs.GetRow(6).PT_OTPARMS;
&rec.PARMKEY.Value = "Delay_in_Secs";
&rec.VALUE.Value = "30";
```

```

&rs.InsertRow(6);
&rec = &rs.GetRow(7).PT_OPTPARMS;
&rec.PARMKEY.Value = "Sleep0_Work1";
&rec.VALUE.Value = "0";

/* SyncRequest will carry a url */
SQLExec("select URL from PSOPTSTATUS where PROBINST=:1 AND URL NOT LIKE
'%.0';",
    &probid, &url);
If &url = "" Then
    throw CreateException(148, 2, "Can not send to OptEngine");
End-If;

/* Specify the Application Server domain URL.
   (This was specified in Step 1 in this example.)
*/
&response = %IntBroker.SyncRequest(%LocalNode, &url);

If &response.ResponseStatus = 0 Then
    &stName = &response.GetRowset().GetRow(1).GetRecord(Record.PT_OPTPARMS).Get
Field(Field.PARMKEY).Value;
    &stVal = Value(&response.GetRowset().GetRow(1).GetRecord(Record.PT_
OPTPARMS).GetField(Field.VALUE).Value);
    If &stName = "STATUS" And
        &stVal = %OptEng_Fail Then
        throw CreateException(148, 2, "Can not send to OptEngine");
    End-If;
    /* Check Detailed msg here */
    If &isSync = "Y" And
        &stVal = %OptEng_Success Then
        &respRS = &response.GetRowset();
        &rowNum = &respRS.ActiveRowCount;
        For &iloop = 1 To &rowNum
            &msgRec = &respRS.GetRow(&iloop).GetRecord(Record.PT_OPTDETMGS);
            If (&msgRec.GetField(Field.MSGSET).Value <> 0) Then
                &msgSet = Value(&msgRec.GetField(Field.MSGSET).Value);
                &msgNum = Value(&msgRec.GetField(Field.MSGNUM).Value);
                &parm1 = &msgRec.GetField(Field.MSGPARM1).Value;
                &parm2 = &msgRec.GetField(Field.MSGPARM2).Value;
                &parm3 = &msgRec.GetField(Field.MSGPARM3).Value;
                &parm4 = &msgRec.GetField(Field.MSGPARM4).Value;
                &parm5 = &msgRec.GetField(Field.MSGPARM5).Value;
                &string = MsgGetText(&msgSet, &msgNum, "Message Not Found",
&parm1,
                &parm2, &parm3, &parm4, &parm5);
            End-If;
        End-For;
    End-If;
End-If;

```

Editing the Response PeopleCode

The OPT_CALL message definition serves as a template. It is delivered to work with the PT_OPTCALL Application Engine program. You can edit the program to suit your needs, or use it as a guide when creating your own response message program.

OPT_CALL Message Program

The OPT_CALL application package implements the Integration Broker method OnRequest. The PeopleCode in this method shows application messages for lights-out mode.

Depending upon the request message, the OnRequest method PeopleCode calls appropriate optimization functions and methods to perform these tasks, and sends a response message containing the returned status and detailed messages from the optimization functions and methods.

You can use the OnRequest method PeopleCode as a template to create your own response message PeopleCode program. For example, you can edit it to run an optimization transaction, which is shown below as an example. This example is edited to match the examples for step 1 and step 3 in the PT_OPTCALL program.

Processing the Transaction Parameters

Edit the OPT_CALL application program OnRequest method to enter the name of your optimization transaction and the name/value pairs for its parameters. In this example, the transaction name is *TEST_LONG_TRANS*, the first parameter name/value pair is *&delayParm* and *&delay* (maps to *Delay_in_Secs* from the request message), and the second parameter name/value pair is *&sleepParm* and *&isSleep* (maps to *Sleep0_Work1* from the request message).

The parameter values are stored as strings in step 3 of the Application Engine program. You may need to convert them here to your desired format. Here is a section of the application program showing the places to edit.

```
If &trans = "TEST_LONG_TRANS" Then
    &REC = &rs.GetRow(6).PT_OPTPARMS;&delayParm = &REC.PARMKEY.Value;&delay =
Value(&REC.VALUE.Value);
    &REC = &rs.GetRow(7).PT_OPTPARMS;&sleepParm = &REC.PARMKEY.Value;&isSleep
= Value(&REC.VALUE.Value);
    &myopt = GetOptEngine(&inst, &detStatus);
    If (&myopt = Null) Then
        &optstatus = %OptEng_Fail;
    End-If;
    If &myopt <> Null And &isSync = "Y" Then
        &optstatus = &myopt.RunSynch(&trans, &delayParm, &delay, &sleepParm,
&isSleep
);
        &detStatus = &myopt.DetailedStatus;
    End-If;
    If &myopt <> Null And &isSync = "N" Then
        &myopt.ProcessInstance = &procInst;
        &optstatus = &myopt.RunASynch(&trans, &delayParm, &delay, &sleepParm,
&is
Sleep);
        &detStatus = &myopt.DetailedStatus;
```

```
End-If; /* iif myopt=null */
End-If;
```

Building a Status Response Message

This section shows the a response message to send a status message for the OPT_CALL message in the application server.

```
/* Insert detailed status and detailed msgs into Response msg rowset */
&respRS = &response.GetRowset();
&respRS.GetRow(1).GetRecord(Record.PT_OPTPARMS).GetField(Field.PARMKEY).Value =
"STATUS";
&respRS.GetRow(1).GetRecord(Record.PT_OPTPARMS).GetField(Field.VALUE).Value =
String(&optstatus);

&respRS.InsertRow(1);
&respRS.GetRow(2).GetRecord(Record.PT_OPTPARMS).GetField(Field.PARMKEY).Value =
"DETAILED_STATUS";
&respRS.GetRow(2).GetRecord(Record.PT_OPTPARMS).GetField(Field.VALUE).Value =
String(&detStatus);
```

Building a Detailed Response Message

This section shows a response message to send a detailed message for the OPT_CALL message on the application server.

```
/*Either optcmd or inst is not passed in correctly, or optengine is not loaded
/created correctly */
If &myopt = Null Then
    &msgRec = &respRS.GetRow(1).GetRecord(Record.PT_OPTDETMGS);
    If &isParmBad = True Then
        &msgRec.GetField(Field.MSGSET).Value = 148;
        &msgRec.GetField(Field.MSGNUM).Value = 505;
    End-If;
End-If;

/* If it is sync transaction, insert DetailMsg to response msg */
If &myopt <> Null And
    &isSync = "Y" And
    &optcmd = "RUN" And
    &optstatus = %OptEng_Success Then
    &arrArray = &myopt.DetailMsgs;
    For &iloop = 1 To &arrArray.Len
        /* First two rows have been inserted because of PT_OPTPARMS for two
status
codes */
        If &iloop > 2 Then
            &respRS.InsertRow(&iloop - 1);
        End-If;
        &msgRec = &respRS.GetRow(&iloop).GetRecord(Record.PT_OPTDETMGS);
        &msgRec.GetField(Field.MSGSET).Value = String(&arrArray [&iloop][1]);
        &msgRec.GetField(Field.MSGNUM).Value = String(&arrArray [&iloop][2]);
        &msgRec.GetField(Field.PARMCOUNT).Value = String(&arrArray [&iloop][3]);
```

```
&msgRec.GetField(Field.MSGPARAM1).Value = String(&arrArray [&iloop][4]);  
&msgRec.GetField(Field.MSGPARAM2).Value = String(&arrArray [&iloop][5]);  
&msgRec.GetField(Field.MSGPARAM3).Value = String(&arrArray [&iloop][6]);  
&msgRec.GetField(Field.MSGPARAM4).Value = String(&arrArray [&iloop][7]);  
&msgRec.GetField(Field.MSGPARAM5).Value = String(&arrArray [&iloop][8]);  
End-For;  
End-If;
```

Optimization Built-in Functions

This section discusses the optimization functions. The functions are discussed in alphabetical order.

CreateOptEngine function

Syntax

```
CreateOptEngine(analytic_inst, {%Synch | %ASynch}[, &detailedstatus] [,  
processinstance])
```

Description

The CreateOptEngine function instantiates an OptEngine object, loads an optimization engine with an analytic instance and returns a reference to it.

Parameters

Parameter	Description
<i>Analytic_inst</i>	Specify the analytic instance ID, which is a unique ID for this analytic instance in this optimization engine. This is supplied by users when they request that an optimization be run.
%Synch %ASynch	Specify whether the optimization engine is synchronous or asynchronous. The values are: • %Synch: run the optimization engine synchronously. • %ASynch: run the optimization engine asynchronously.

Parameter	Description
<i>&detailedstatus</i>	Specify a variable that the engine uses to give further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Fail: The function failed. • %OptEng_Invalid_Aiid: The analytic instance ID passed to the function is invalid. • %OptEng_Exists: An optimization engine instance already exists and is loaded. • %OptEng_Method_Disabled: A method is disabled or not valid. • %OptEng_DB_Updates_Pending: indicates that database updates are pending.
<i>processinstance</i>	Enter the process instance ID. You use this parameter only with lights-out processing, most likely with the subscription PeopleCode for application message. Note: This optional parameter is positional. If you use it, you must also use the <i>&detailedstatus</i> parameter. The state record that you use with Application Engine contains the process instance ID. See Using Lights-Out Mode with Optimization. See Application Engine: Using State Records.

Returns

If successful, CreateOptEngine returns an OptEngine PeopleCode object. If the function fails, it returns a null value. Examine the optional status reference parameter in case of a Null return for additional information regarding the failure.

Example

An OptEngine object variable can be scoped as Local, Component, or Global.

You declare OptEngine objects as type OptEngine. For example:

```
Local OptEngine &MyOptEngine;
Component OptEngine &MyOpt;
Global OptEngine &MyOptEng;
```

The following example loads an optimization engine with the analytic instance:

```
Local OptEngine &myopt;
Local string &probinst;
Local string &transaction;
Local integer &detailedstatus;

&probinst = GetRecord(Record.PSOPTPRBINST).GetField(Field.PROBINST).Value;
&myopt = CreateOptEngine(&probinst, %Synch);
```

The following example shows the use of the optional status parameter:

```
&myopt = CreateOptEngine(&probinst, %Synch, &detailedstatus);  
if &myopt = Null then  
    if &detailedstatus = %OptEng_Invalid_Piid then  
        /*perform some action */  
    end_if;  
end_if;
```

CreateOptInterface function

Syntax

CreateOptInterface()

Description

The CreateOptInterface function instantiates an OptInterface object.

Note

You can use this function and the OptInterface methods only within an application class that you extend from the OptBase application class, or within PeopleCode that you call from that application class. This ensures that the OptInterface PeopleCode runs only on the optimization engine.

Parameters

None.

Returns

If successful, CreateOptInterface returns an OptInterface PeopleCode object. If the function fails, it returns a null value.

Example

You declare OptInterface objects as type OptInterface. For example:

```
Local OptInterface &MyOptInterface;  
Component OptInterface &MyOptInt;  
Global OptInterface &MyOptInt;
```

The following example instantiates an OptInterface object:

```
Local OptInterface &myInterface;  
Int &status;  
  
&myInterface = CreateOptInterface(&additionalStatus);  
if (&myInterface != NULL) then  
    &status = &myInterface.ActivateModel("RMO_TEST");  
    if (&status = %OptInter_Fail) then
```



```
        /* examine &myInterface.DetailedStatus for reason */
        ...
    end-if;
else
    /* CreateOptInterface has returned NULL */
    /* take some corrective action here */
    ...
end_if;
```

DeleteOptProbInst function

Syntax

DeleteOptProbInst(*probinst*[, &*detailedstatus*])

Description

The DeleteOptProbInst function deletes the analytic instance ID from PeopleTools metadata. This function can be called only inside FieldChange, PreSaveChange and PostSaveChange PeopleCode events, and in Workflow.

Note

Use this function to delete the analytic instance ID after deleting data in optimization application tables for this analytic instance.

Parameters

Parameter	Description
<i>probinst</i>	Enter the analytic instance ID to delete.
<i>&detailedstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Fail: The function failed. • %OptEng_Invalid_Piid: The analytic instance ID passed to the function is invalid. • %OptEng_Sql_Exception: A SQLerror is encountered when access database. • %OptEng_Exists: An analytic server loaded with this analytic instance still exists.

Returns

Returns %OptEng_Success if successful; otherwise returns %OptEng_Fail.

Example

The following example deletes the instance for an analytic type:

Note

Whenever you add records to an analytic type, you must call `DeleteOptProbInst` to delete the old analytic type instances and then call `InsertOptProbInst` to recreate them.

```
Local string &probinst;  
Local string &prodtype;  
Local integer &ret;  
&probinst = "PATSMITH";  
&prodtype = "QEOPT";  
&ret = DeleteOptProbInst(&probinst, &prodtype);  
If &ret <> %OptEng_Success Then  
    QEOPT_WRK.MESSAGE_TEXT = "Delete of analytic instance " | &probinst | "  
    failed.";  
Else  
    QEOPT_WRK.MESSAGE_TEXT = "Analytic Instance " | &probinst | " deleted.";  
End-If;
```

The following example shows the use of the optional status parameter:

```
Local integer &detailedstatus;  
&ret = DeleteOptProbInst(&probinst, &prodtype, &detailedstatus);  
If &ret <> %OptEng_Success AND &detailedstatus=%OptEng_Invalid_Piid then  
    QEOPT_WRK.MESSAGE_TEXT = "Delete of analytic instance " | &probinst | "  
    failed  
    for bad piid.";  
Else  
    QEOPT_WRK.MESSAGE_TEXT = "Analytic Instance " | &probinst | " deleted.";  
End-If;
```

GetOptEngine function

Syntax

`GetOptEngine(probinst [, &detailedstatus])`

Description

The `GetOptEngine` function returns a handle to an optimization engine that is already loaded with the analytic instance.

Note

You cannot call `GetOptEngine` from a domain other than the application server.

Parameters

Parameter	Description
<i>probinst</i>	Enter the analytic instance ID, which is unique ID for this analytic instance in this optimization engine.
<i>&detailedstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Fail: The function failed. • %OptEng_Invalid_Piid: The analytic instance ID passed to the function is invalid.

Returns

Returns an OptEngine PeopleCode object if successful, a null value otherwise.

Example

The following example causes an optimization engine to shut down its analytic instance:

```
Global string &probinst;
Local OptEngine &myopt;
Local integer &status;

&myopt = GetOptEngine(&probinst);
If &myopt <> NULL then
&status = &myopt.ShutDown();
QEOPT_WRK.MESSAGE_TEXT = "Analytic Instance ID " | &probinst
| " has been shutdown successfully.";
End-if;
```

Or, you can use the optional status parameter:

```
&myopt = GetOptEngine(&probinst, &detailedstatus);
if &myopt=NULL and &detailedstatus=%OptEng_Invalid_Piid then
/* perform some action */
End-if;
```

GetOptProbInstList function

Syntax

```
GetOptProbInstList(ProblemType , OutputErrorCode [, Prefix] [,
&detailedstatus])
```

Description

The GetOptProbInstList function gets the list of all analytic instance IDs in an analytic type.

Parameters

Parameter	Description
<i>ProblemType</i>	Enter the name of the analytic type that you created in Application Designer.
<i>OutputErrorCode</i>	Future use. Always returns zero.
<i>Prefix</i>	(Optional) Enter a string. If used, this prefix causes the returned list to include only the analytic instance IDs that start with this prefix. If not used, all the analytic instance IDs in the analytic type are returned.
<i>&detailedstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Fail: The function failed. • %OptEng_Invalid_Piid: The analytic type name passed to the function is invalid.

Returns

Returns an array of strings containing the optimization analytic instance list.

Example

The following example shows the usage of GetOptProbInstList to fill the display field on a page:

```
Global string &probinst;
Local integer &detailedstatus;
Local integer &iloop;
Local array of string &instarray;

QEOPT.OPERATOR = %UserId;

&instarray = GetOptProbInstList(QEOPT.PROBTYPE, &ret, &detailedstatus);

If &ret <> %OptEng_Success Then
    QEOPT_WRK.MESSAGE_TEXT = "Could not get analytic instances
    for analytic type " | QEOPT.PROBTYPE ;
Else
    For &iloop = 1 To &instarray.Len
        QEOPT_WRK.MESSAGE_TEXT = QEOPT_WRK.MESSAGE_TEXT | &instarray[&iloop] |
        " ";
    End-For;
End-If;
```

The following example shows the use of the optional status parameter:

```
&instarray = GetOptProbInstList(QEOPT.PROBTYPE, &ret, &detailedstatus);  
If &ret <> %OptEng_Success and &detailedstatus=%OptEng_Invalid_Piid Then  
    QEOPT_WRK.MESSAGE_TEXT = "Could not get analytic instances for analytic  
type "  
| QEOPT.PROBTYPE | "because bad piid" ;  
End-If;
```

InsertOptProbInst function

Syntax

`InsertOptProbInst(probinst, ProblemType[, &detailedstatus] [,Description])`

Description

The InsertOptProbInst function inserts a new analytic instance ID into the PeopleTools metadata.

The InsertOptProbInst function can be called only inside FieldChange, PreSave and PostSave PeopleCode events, and in Workflow.

Note

You must use this function to create the analytic instance ID before inserting data into optimization application tables for this analytic instance.

Parameters

Parameter	Description
<i>probinst</i>	Enter the analytic instance ID to be inserted into the analytic type.
<i>ProblemType</i>	Enter the name of the analytic type that you created in Application Designer.
<i>&detailedstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Fail: The function failed. • %OptEng_Invalid_Piid: The analytic instance ID passed to the function is invalid.
<i>Description</i>	(Optional) Specify a description for the analytic instance. This parameter takes a string value.

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

```
Local string &probinst;  
Local string &prodtype;  
Local integer &ret;  
Local integer &detailedstatus;  
  
&probinst = "PATSMITH";  
&prodtype = "QEOPT";  
&probDescr = "New QEOPT instance";  
&ret = InsertOptProbInst(&probinst, &prodtype, &probDescr);  
If &ret <> %OptEng_Success Then  
    QEOPT_WRK.MESSAGE_TEXT = "Insert of analytic instance "  
    | &probinst | " failed.";   
Else  
    QEOPT_WRK.MESSAGE_TEXT = "Analytic Instance " | &probinst | " created.";   
End-If;
```

The following example shows the use of the optional status parameter:

```
&ret = InsertOptProbInst(&probinst, &prodtype, &detailedstatus);  
If &ret <> %OptEng_Success and &detailedstatus=%OptEng_Invalid_Piid Then  
    QEOPT_WRK.MESSAGE_TEXT = "Insert of analytic instance "  
    | &probinst | " failed for bad piid.";   
End-if;
```

IsValidOptProbInst function

Syntax

IsValidOptProbInst(*probinst* [, &*detailedstatus*])

Description

IsValidOptProbInst determines if a given analytic instance exists in the optimization metadata.

Parameters

Parameter	Description
<i>probinst</i>	Enter the analytic instance ID to be validated.

Parameter	Description
<i>&detailedstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • %OptEng_Success: The function completed successfully. • %OptEng_Invalid_Piid: The analytic type name passed to the function is invalid.

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

```
Local string &probinst;  
Local integer &detailedstatus;  
Local integer &ret;  
  
&probinst = "PATSMITH";  
&ret = IsValidOptProbInst(&probinst, &detailedstatus);  
If &ret <> %OptEng_Success and &detailedstatus=%OptEng_Invalid_Piid Then  
    <perform some action>  
End-if;
```

OptEngine Class Methods

This section discusses the optimization methods for the OptEngine PeopleCode class. The methods are listed in alphabetical order.

CheckOptEngineStatus method: OptEngine class

Syntax

```
CheckOptEngineStatus()
```

Description

The CheckOptEngineStatus method returns the status of the optimization engine, using a combination of its return value and the DetailedStatus OptEngine class property. Keep the following in mind:

- The value returned by CheckOptEngineStatus is the operational status of the optimization engine.

- The DetailedStatus property indicates the completion status of the OptEngine method call CheckOptEngineStatus.

For example, CheckOptEngineStatus can return %OptEng_Idle and DetailedStatus is %OptEng_Success. For CheckOptEngineStatus, DetailedStatus can have the value:

- %OptEng_Success
- %OptEng_Fail
- %OptEng_Not_Available

Note

Before this method is called, the CreateOptEngine or GetOptEngine must be called.

Returns

Returns an integer for the status of the optimization engine. These numbers are message IDs belonging to message set 148 in the message catalog.

Numeric Value	Constant Value	Description
21	%OptEng_Not_Loaded	The optimization engine process is running, but is not currently loaded with an application problem.
22	%OptEng_Busy>Loading	The optimization engine is busy loading an application problem. It will not accept transaction requests until loading completes.
23	%OptEng_Idle	The optimization engine is loaded with an application problem and waiting for a transaction request.
24	%OptEng_Busy	The optimization engine is busy processing a transaction request for the loaded application problem. It will not accept additional transaction requests until the current one completes.
26	%OptEng_Unknown	An error has occurred. The optimization engine status cannot be determined.

Example

This PeopleCode example shows optimization engine status being checked:

```
Local OptEngine &myopt;
Local string &probinst;
Local integer &status;
&myopt = GetOptEngine("PATSMITH");
/* Initialize the DESCRLONG field in the QE_FUNCLIB_OPT record to null. */
```



```
GetLevel0().GetRow(1).GetRecord(Record.QE_FUNCLIB_OPT).DESCRLONG.Value = "";
&status = &myopt.CheckOptEngineStatus();
GetLevel0().GetRow(1).GetRecord(Record.QE_FUNCLIB_OPT).DESCRLONG.Value = "Opt
Engine status = " | MsgGet(148, &status, "Could not send to the OptEngine.");
```

You can also retrieve the detailed status:

```
Local integer &detailedstatus
&status = &myopt.CheckOptEngineStatus();
&detailedstatus = &myopt.DetailedStatus;
```

FillRowset method: OptEngine class

Syntax

```
FillRowset(PARAM_NAME, &Rowset[, &functionstatus])
```

Description

This method gets the value of a transaction output parameter that is a rowset. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

When using the OptEngine DetailedStatus property, keep the following in mind:

- The value returned by FillRowset is the operational status of the optimization engine.
- The OptEngine DetailedStatus property indicates the completion status of the OptEngine method call FillRowset.

For example, FillRowset returns %OptEng_Fail, and DetailedStatus is %OptEng_Method_Disabled.

For FillRowset, the DetailedStatus property can have the value:

- %OptEng_Success.
 - %OptEng_Fail.
 - %OptEng_Method_Disabled.
- This indicates that the method is disabled or not valid.
- %OptEng_Wrong_Parm_Type

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Parameter	Description
<i>&Rowset</i>	Enter the rowset containing the values. This rowset must be a single record rowset, and the record must match the record name associated with the transaction parameter in the analytic type definition.
<i>&functionstatus</i>	(Optional) This status reference parameter returns an integer value giving further information about the evaluation of this function. The value returned is one of the following: • <code>OptEng_Success</code>: The function completed successfully. • <code>OptEng_Fail</code>: The function failed. • <code>OptEng_Method_Disabled</code>: A method is disabled or not valid.

Returns

This method returns a constant. Valid values are:

Value	Description
<code>%OptEng_Success</code>	Returned if method succeeds.
<code>%OptEng_Fail</code>	Returned if the method fails.

Example

The following PeopleCode example runs a synchronous optimization transaction named `RETURN_MACHINE_UNAVAILABLE`. It has these parameters:

- Input: `MACHINE_NAME` to specify the machine for which we need unavailable times.
- Output: `RETURN_TIMES` to specify a rowset and `MACHINE_WRK` record containing the `BEGIN_DATE` and `END_DATE` fields.

This PeopleCode example sets input parameter values and gets an output parameter value:

```

Local OptEngine &myopt;
Local integer &status;
Local string &machname;
Local Rowset &rs;
&myopt = GetOptEngine("PATSMITH");
&machname = QEOPT_WRK.MACHINE_NAME.Value;
/* Run the RETURN_MACHINE_UNAVAILABLE transaction synchronously with input
values.
*/
&status = &myopt.RunSynch("RETURN_MACHINE_UNAVAILABLE", "MACHINE_NAME",
&machname);
If Not &status Then
    QEOPT_WRK.MESSAGE_TEXT = " RETURN_MACHINE_UNAVAILABLE transaction failed.";
    Return;
End-If;
/* Get output value from the RETURN_MACHINE_UNAVAILABLE transaction. */

```

```
&rs = CreateRowset(Record.MACHINE_WRK);  
&status = &myopt.FillRowset("RETURN_TIMES", &rs);
```

You can also use the [new->] DetailedStatus property as follows:

```
&status = &myopt.FillRowset("RETURN_TIMES", &rs);  
if &status=%OptEng_Fail and &myopt.DetailedStatus=%OptEng_Method_Disabled then  
    /* perform some action */  
End-if;
```

GetDate method: OptEngine class

Syntax

```
GetDate(PARAM_NAME[, &status])
```

Description

This method gets the value of a transaction output parameter with a data type of Date. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The OptEngine DetailedStatus property indicates the completion status of the OptEngine method call GetDate. For GetDate, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns a Date object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetNumber method: OptEngine class](#).

GetDateArray method: OptEngine class

Syntax

```
GetDateArray(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type Array of Date. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The OptEngine DetailedStatus property indicates the completion status of the OptEngine method call GetDateArray. For GetDateArray, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns an Array of Date object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetStringArray method: OptEngine class](#).

GetDateTime method: OptEngine class

Syntax

```
GetDateTime(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type of DateTime. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetDateTime. For GetDateTime, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns a DateTime object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetNumber method: OptEngine class](#).

GetDateTimeArray method: OptEngine class

Syntax

GetDateTimeArray(*PARAM_NAME*)

Description

This method gets the value of a transaction output parameter with a data type Array of DateTime. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetDateTimeArray. For GetDateTimeArray, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns an Array of DateTime object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetStringArray method: OptEngine class](#).

GetNumber method: OptEngine class

Syntax

```
GetNumber (PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type of Number. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetNumber. For GetNumber, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch . This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns a Number object; use this method when that is the data type of the transaction output parameter value.

Example

The following PeopleCode example runs a synchronous optimization transaction named IS_MACHINE_AVAILABLE. It has these parameters:

- Input MACHINE_NAME to specify the machine.
- Inputs BEGIN_DATE and END_DATE to specify the time slot.
- Output AVAILABLE_FLAG to specify whether the machine is available in that time slot.

This PeopleCode example sets input parameter values and gets an output parameter value:

```
Local OptEngine &myopt;
Local integer &status;
Local string &machname;
Local datetime &begindate;
Local datetime &enddate;
&myopt = GetOptEngine("PATSMITH");
&machname = QEOPT_WRK.MACHINE_NAME.Value;
&begindate = QEOPT_WRK.BEGIN_DATE.Value;
&enddate = QEOPT_WRK.END_DATE.Value;
/* Run the IS_MACHINE_AVAILABLE transaction synchronously with input values.
*/
&status = &myopt.RunSynch("IS_MACHINE_AVAILABLE", "MACHINE_NAME",
    &machname, "BEGIN_DATE", &begindate, "END_DATE", &enddate);
If Not &status Then
    QEOPT_WRK.MESSAGE_TEXT = "IS_MACHINE_AVAILABLE transaction failed.";
    Return;
End-If;
/* Get output value from the IS_MACHINE_AVAILABLE transaction. */
QEOPT_WRK.AVAILABLE_FLAG = &myopt.GetNumber("AVAILABLE_FLAG");
```

You can use the DetailedStatus property as follows:

```
QEOPT_WRK.AVAILABLE_FLAG = &myopt.GetNumber("AVAILABLE_FLAG");
if &myopt.DetailedStatus=%OptEng_Fail then
    /* perform some action */
End-if;
```

GetNumberArray method: OptEngine class

Syntax

```
GetNumberArray(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type Array of Number. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetNumberArray. For GetNumberArray, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: this indicates that the method is disabled or not valid.

Note

Do not pass an array of type Integer as a transaction parameter. Use an array of type Number instead.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns an Array of Number object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetStringArray method: OptEngine class](#).

GetString method: OptEngine class

Syntax

```
GetString(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type of String. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetString. For GetString, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns a String object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetNumber method: OptEngine class](#).

GetStringArray method: OptEngine class

Syntax

GetStringArray(*PARAM_NAME*)

Description

This method gets the value of a transaction output parameter with a data type Array of String. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetStringArray. For GetStringArray, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns an Array of String object; use this method when that is the data type of the transaction output parameter value.

Example

The following PeopleCode example runs a synchronous optimization transaction named ARE_MACHINES_AVAILABLE. It has these parameters:

- Inputs BEGIN_DATE and END_DATE to specify the time slot.
- Output MACHINE_NAMES to specify the machines available in that time slot.

This PeopleCode example sets input parameter values and gets an output parameter value:

```
Local OptEngine &myopt;
Local integer &status;
Local array of string &machnames;
Local datetime &begindate;
Local datetime &enddate;
&myopt = GetOptEngine("PATSMITH");
&begindate = QEOPT_WRK.BEGIN_DATE.Value;
&enddate = QEOPT_WRK.END_DATE.Value;
/* Run the ARE_MACHINES_AVAILABLE transaction synchronously with input
values. */
&status = &myopt.RunSynch("ARE_MACHINES_AVAILABLE",
    "BEGIN_DATE", &begindate, "END_DATE", &enddate);
If &status=%OptEng_Fail Then
    QEOPT_WRK.MESSAGE_TEXT = "ARE_MACHINES_AVAILABLE transaction failed.";
    Return;
End-If;
/* Get output value from the ARE_MACHINES_AVAILABLE transaction. */
&machnames = &myopt.GetStringArray("MACHINE_NAMES");
```

The following example shows the use of the DetailedStatus property:

```
Local array of string &machnames;
&machnames = &myopt.GetStringArray("MACHINE_NAMES");
if &myopt.DetailedStatus=%OptEng_Fail then
    /* perform some action */
End-if;
```

GetTime method: OptEngine class

Syntax

```
GetTime(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type of Time. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetTime. For GetTime, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns a Time object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetNumber method: OptEngine class](#).

GetTimeArray method: OptEngine class

Syntax

```
GetTimeArray(PARAM_NAME)
```

Description

This method gets the value of a transaction output parameter with a data type Array of Time. This cannot be used with the RunAsynch method; RunSynch is needed to make the transaction output parameter values immediately available.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetTimeArray. For GetTimeArray, DetailedStatus can have the value:

- %OptEng_Success.
- %OptEng_Fail.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

Parameters

Parameter	Description
<i>PARAM_NAME</i>	Enter a string for the name of the output parameter to get from the transaction that was just performed with RunSynch. This parameter must be defined as an output or both (input and output) in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

Returns an Array of Time object; use this method when that is the data type of the transaction output parameter value.

Example

See [GetStringArray method: OptEngine class](#).

GetTraceLevel method: OptEngine class

Syntax

`GetTraceLevel(component)`

Description

GetTraceLevel gets the severity level at which events are logged for a given component.

The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call GetTraceLevel. For GetTraceLevel, DetailedStatus can have the value:

- %OptEng_Success.
This indicates that the function completed successfully.
- %OptEng_Fail.
This indicates that the function failed.
- %OptEng_Method_Disabled.
This indicates that the method is disabled or not valid.
- %OptEng_DB_Updates_Pending.
This indicates that database updates are pending.

Parameters

Parameter	Description
<i>component</i>	Enter one of the following PeopleCode constants: Opt_Engine, Opt_Utility, Opt_Datacache, or Opt_Plugin.

Returns

Returns one of the following.

- %Severity_Fatal
- %Severity_Status
- %Severity_Error
- %Severity_Warn
- %Severity_Info
- %Severity_Trace1
- %Severity_Trace2

Example

```
Local OptEngine &myopt;  
Local integer &tracelevel;  
  
&myopt = GetOptEngine("PATSMITH");  
  
&tracelevel = &myopt.GetTraceLevel(%Opt_Engine);  
if &myopt.DetailedStatus = %OptEng_Success then  
  
    if (&tracelevel = %Severity_Info_ then  
        winmessage("Severity level for the OptEngine is 'Info'");  
    End-if;  
End-if;
```

RunAsynch method: OptEngine class

Syntax

RunAsynch(*TRANSACTION*, *PARM_PAIRS*)

Description

The RunAsynch method requests the optimization engine to run the transaction in asynchronous mode.

When using the DetailedStatus OptEngine property, keep the following in mind:

- The value returned by RunASynch is the operational status of the optimization engine.
- The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call RunASynch.

For example, RunASynch can return %OptEng_Fail and DetailedStatus is %OptEng_DB_Updates_Pending. For RunASynch, DetailedStatus can have the value:

- %OptEng_Success: indicates that the function completed successfully.
- %OptEng_Fail: indicates that the function failed.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.

- %OptEng_DB_Updates_Pending: indicates that database updates are pending.

Parameters

Parameter	Description
<i>TRANSACTION</i>	Enter a string for the name of the transaction to run.
<i>PARAM_PAIRS</i>	Enter the name and value pairs (string name and value) for this transaction. Not used if the transaction has no parameters. Parameters are defined in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

This PeopleCode example runs an asynchronous optimization transaction named SOLVE. It has no input or output parameters. The SOLVE transaction solves the exercise scheduling problem and puts the results into the QE_RWSM_EXERSCH table.

```
Local OptEngine &myopt;  
Local integer &status;  
&myopt = GetOptEngine("PATSMITH");  
/* Run the SOLVE transaction asynchronously with input values. */  
&status = &myopt.RunAsynch("SOLVE");  
If &status=%OptEng_Fail Then  
    QEOPT_WRK.MESSAGE_TEXT = "SOLVE transaction failed.";  
    Return;  
End-If;
```

The following example shows the use of the DetailedStatus property.

```
Local integer &status;  
&status = myopt.RunAsynch("SOLVE");  
if &status=%OptEng_Fail and &myopt.DetailedStatus=%OptEng_Method_Disabled then  
    <perform some action>  
End-if;
```

RunSynch method: OptEngine class

Syntax

RunSynch(*TRANSACTION*, *PARAM_PAIRS*)

Description

The RunSynch method requests the optimization engine to run the transaction in synchronous mode.

When using the DetailedStatus OptEngine property, keep the following in mind:

- The value returned by RunSynch is the operational status of the optimization engine.
- The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call RunSynch.

For example, RunSynch can return %OptEng_Fail and DetailedStatus is %OptEng_DB_Updates_Pending. For RunSynch, DetailedStatus can have the value:

- %OptEng_Success: indicates that the function completed successfully.
- %OptEng_Fail: indicates that the function failed.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.
- %OptEng_DB_Updates_Pending: indicates that database updates are pending.

Parameters

Parameter	Description
<i>TRANSACTION</i>	Enter a string for the name of the transaction to run.
<i>PARAM_PAIRS</i>	Enter the name and value pairs (string name and value) for this transaction. Not used if the transaction has no parameters. Parameters are defined in the analytic type definition. See Optimization Framework: Configuring Analytic Type Transactions.

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

The following PeopleCode example runs a synchronous optimization transaction named IS_MACHINE_AVAILABLE. It has these parameters:

- Input MACHINE_NAME to specify the machine.
- Inputs BEGIN_DATE and END_DATE to specify the time slot.
- Output AVAILABLE_FLAG to specify whether the machine is available in that time slot.

This PeopleCode example sets input parameter values and gets an output parameter value:

```
Local OptEngine &myopt;  
Local integer &status;  
Local string &machname;
```

```

Local datetime &begindate;
Local datetime &enddate;
&myopt = GetOptEngine("PATSMITH");
&machname = QEOPT_WRK.MACHINE_NAME.Value;
&begindate = QEOPT_WRK.BEGIN_DATE.Value;
&enddate = QEOPT_WRK.END_DATE.Value;
/* Run the IS_MACHINE_AVAILABLE transaction synchronously with input values.
*/
&status = &myopt.RunSynch("IS_MACHINE_AVAILABLE",
    "MACHINE_NAME", &machname, "BEGIN_DATE", &begindate, "END_DATE", &enddate);
If &status=%OptEng_Fail Then
    QEOPT_WRK.MESSAGE_TEXT = "IS_MACHINE_AVAILABLE transaction failed.";
    Return;
End-If;
/* Get output value from the IS_MACHINE_AVAILABLE transaction. */
QEOPT_WRK.AVAILABLE_FLAG = &myopt.GetNumber("AVAILABLE_FLAG");

```

Or, the following example shows the use of the DetailedStatus property.

```

Local integer &status;
&status = myopt.RunSynch("SOLVE");
if &status=%OptEng_Fail and &myopt.DetailedStatus=%OptEng_Method_Disabled then
    <perform some action>
End-if;

```

SetTraceLevel method: OptEngine class

Syntax

```
SetTraceLevel(component, severity )
```

Description

SetTraceLevel sets the severity level at which events are logged for a given component.

When using the DetailedStatus OptEngine property, keep the following in mind:

- The value returned by SetTraceLevel is the operational status of the optimization engine.
- The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call SetTraceLevel.

For example, SetTraceLevel can return %OptEng_Fail and DetailedStatus is %OptEng_DB_Updates_Pending. For SetTraceLevel, DetailedStatus can have the value:

- %OptEng_Success: indicates that the function completed successfully.
- %OptEng_Fail: indicates that the function failed.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.
- %OptEng_DB_Updates_Pending: indicates that database updates are pending.

Parameters

Parameter	Description
<i>component</i>	Use one of the following PeopleCode constants: Opt_Engine, Opt_Utility, Opt_Datacache, or Opt_Plugin.
<i>severity</i>	Use one of the following PeopleCode constants. These options set the degree to which errors are logged. You can set the tracing levels differently for various parts of your program. This enables you to control the amount of trace information that your program generates. The following list shows the order of the severity, starting with the highest level. For example, %Severity_Error logs %Severity_Fatal, %Severity_Status, and %Severity_Error messages, while the system filters out other messages. Keep in mind that the higher the severity, the greater the performance overhead. • %Severity_Fatal • %Severity_Status • %Severity_Error • %Severity_Warn • %Severity_Info • %Severity_Trace1 • %Severity_Trace2

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

```
Local OptEngine &myopt;  
Local integer &status;  
Local string &machname;  
Local datetime &begindate;  
Local datetime &enddate;  
&myopt = GetOptEngine("PATSMITH");  
  
&status = &myopt.SetTraceLevel(%Opt_Engine, %Severity_Warn);  
if &status = %OptEng_Fail then  
    <example: notify user that set trace action has failed>  
End-if;
```

ShutDown method: OptEngine class

Syntax

```
ShutDown()
```

Description

The ShutDown method requests the optimization engine to shut down.

If the optimization engine cannot be contacted for shutdown, the return status is %OptEng_Fail and the DetailedStatus property is OptEng_Not_Available.

When using the DetailedStatus OptEngine property, keep the following in mind:

- The value returned by Shutdown is the operational status of the optimization engine.
- The DetailedStatus OptEngine property indicates the completion status of the OptEngine method call Shutdown.

For example, Shutdown can return %OptEng_Fail and DetailedStatus is %OptEng_DB_Updates_Pending. For Shutdown, DetailedStatus can have the value:

- %OptEng_Success: indicates that the function completed successfully.
- %OptEng_Fail: indicates that the function failed.
- %OptEng_Method_Disabled: indicates that the method is disabled or not valid.
- %OptEng_DB_Updates_Pending: indicates that database updates are pending.

Note

Before this method is called, CreateOptEngine or GetOptEngine must be called. Call ShutDown to shut down optimization engines even when running in Application Engine.

Parameters

None.

Returns

This method returns a constant. Valid values are:

Value	Description
%OptEng_Success	Returned if method succeeds.
%OptEng_Fail	Returned if the method fails.

Example

This PeopleCode example shows an optimization engine being shut down:

```
Local OptEngine &myopt;  
Local integer &status;
```

```
&myopt = GetOptEngine("PATSMITH");  
/* Shut down the optimization engine */  
&status = &myopt.ShutDown();  
If &status=%OptEng_Fail Then  
    QEOPT_WRK.MESSAGE_TEXT = "PATSMITH optimization engine shutdown failed.";  
    Return;  
Else  
    QEOPT_WRK.MESSAGE_TEXT = "PATSMITH optimization engine shutdown  
successful.";  
    Return;  
End-If;
```

The following example shows the use of the DetailedStatus property:

```
Local integer &status;  
&status = myopt.ShutDown();  
if &status=%OptEng_Fail and &myopt.DetailedStatus=%OptEng_Method_Disabled then  
    <perform some action>  
End-if;
```

OptEngine Class Properties

This section lists the optimization properties for the OptEngine PeopleCode class. The properties are listed in alphabetical order.

DetailMsgs property: OptEngine class

Description

The DetailMsgs property returns a list of messages generated by an optimization engine. Use DetailMsgs after you use the RunAsynch and RunSynch methods to check the status messages for an optimization transaction.

If the transaction fails, detailed messages are automatically shown to the user. If the transaction succeeds, warnings and informational messages may be generated by the transaction. Use this property to retrieve those messages and make them available to the user.

DetailMsgs provides a two-dimensional array containing the message set ID, the message number in the message catalog, and any arguments. Each row in the two-dimensional array has the following structure:

1. Message set ID.
2. Message number.
3. Number of message arguments.
4. Argument1.
5. Argument2.
6. Argument3.
7. Argument4.
8. Argument5.

A maximum of five arguments is supported for each message.

Note

To hold the property value returned, you need to declare an array of array of type *Any*.

Note

Before this method is called, you must call `CreateOptEngine` or `GetOptEngine`.

Example

```
Local OptEngine &myopt;  
Local integer &status;  
Local string &piid;  
  
Local string &string;  
Local array of array of any &arrArray;  
&NEWLINE = Char(10);  
&string = "";  
  
&piid = GetRecord(Record.PSOPTPRBINST).GetField(Field.PROBINST).Value;  
&myopt = GetOptEngine(&piid);  
  
&status = &myopt.RunSynch("TEST_TRANSACTION");  
  
If (&status = %OptEng_Success) then  
  
    &arrArray = &myopt.DetailMsgs;  
    For &iloop = 1 To &arrArray.Len  
        &string = &string | &NEWLINE | MsgGetText(&arrArray [&iloop][1] /*message  
set*  
/,  
        &arrArray [&iloop][2] /*message id*/, "Message Not Found",&arrArray[&iloop]  
[4],  
        &arrArray [&iloop][5],&arrArray [&iloop][6],  
&arrArray [&iloop][7],&arrArray[&iloop][8]);  
  
    End-For;  
  
    GetLevel0().GetRow(1).GetRecord(Record.QE_FUNCLIB_OPT).DESCRLONG.Value =  
    &string;  
End-If;
```

DetailedStatus property: OptEngine class

Description

The `DetailedStatus` property contains the detailed execution status of an `OptEngine` method after the method is executed.

Example

```
Local integer &status;  
&status = myopt.ShutDown();  
if &status=%OptEng_Fail and &myopt.DetailedStatus=%OptEng_Method_Disabled then  
    <perform some action>  
End-if;
```

OptBase Application Class

This PeopleCode application class is part of the PT_OPT_BASE application package. It establishes the basic framework for developing PeopleCode that invokes the Optimization PeopleCode plug-in. To use the plug-in, you develop a application class that extends the OptBase application class. OptBase contains the following types of methods:

- A set of base methods that you can extend for the purpose of handling input and output parameters.

You can use them within any method you develop that corresponds by name to a transaction in an analytic type definition. These methods apply to the parameters that are defined for the transaction in the analytic type.
- A set of abstract placeholder methods that you can use to implement callback capability.

You must extend these if you designate one or more records as callback records in your analytic type definition, even if you don't add any functionality to the methods.
- An abstract placeholder method, Init, that you can extend if you want to do any preprocessing before your first Optimization PeopleCode plug-in transaction runs.

Note

The analytic type definition to which these methods apply is the one that specifies this derived application class.

The CreateOptInterface function is the only optimization built-in function that you can use within an application class that you extend from the OptBase application class, or within PeopleCode that you call from that application class.

Optbase Callback Methods

PeopleSoft Optimization Framework has a built-in callback functionality when the OptInterface PeopleCode calls an Optimization PeopleCode plug-in transaction, it first determines whether you designated one or more records in your analytic type definition as callback records. For each callback record, the framework determines if any the record's database rows have been inserted, deleted, or updated since the optimization datacache was populated. If any changes have occurred, the framework propagates those changes to the datacache before invoking the transaction.

PeopleSoft provides methods that the framework uses to apply its callback functionality. In combination with the framework's callback changes, you might want to perform additional processing for your own purposes, including updating any derived data structures that are used by your optimization application. You can accomplish this by extending the callback methods and adding your own PeopleCode. Each callback method launches under different circumstances.

Note

Don't call any of these methods in your own PeopleCode. They're called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run within each method.

Following is a list of the abstract callback placeholder methods documented as part of the PT_OPT_BASE:OptBase application class:

- **OptInsertCallback**
This method launches when the framework propagates to the datacache any database insertions encountered for a callback record.
- **OptDeleteCallback**
This method launches when the framework propagates to the datacache any database deletions encountered for a callback record.
- **OptPreUpdateCallback**
This method launches before the framework propagates each database update encountered for a callback record.
- **OptPostUpdateCallback**
This method launches after the framework propagates each database update encountered for a callback record.
- **OptRefreshCallback**
This method launches after the framework propagates all database deletions, insertions, and updates encountered for all callback records.

Important

If any record in your analytic type definition is designated a callback record, you must ensure that you extend all of the callback methods in your extended class, even if each extended method contains only a Return statement. Otherwise your Optimization PeopleCode plug-in will fail.

See Optimization Framework: Configuring Analytic Type Records.

OptBase Class Methods

This section discusses the abstract base class placeholder methods for the PT_OPT_BASE:OptBase application class. The methods are listed in alphabetical order.

GetParmDate method: OptBase class

Syntax

```
GetParmDate(parmName, &parmVal)
```

Description

The GetParmDate method retrieves a Date parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Date variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmDateArray method: OptBase class

Syntax

```
GetParmDateArray(parmName, &parmVal)
```

Description

The GetParmDateArray method retrieves a Date array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Date array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmDateTime method: OptBase class

Syntax

```
GetParmDateTime(parmName, &parmVal)
```

Description

The GetParmDateTime method retrieves a DateTime parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a DateTime variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmDateTimeArray method: OptBase class

Syntax

```
GetParmDateTimeArray(parmName, &parmVal)
```

Description

The GetParmDateTimeArray method retrieves a DateTime array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a DateTime array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmNumber method: OptBase class

Syntax

```
GetParmNumber(parmName, &parmVal)
```


Description

The GetParmNumber method retrieves a Number parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Number variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmNumberArray method: OptBase class

Syntax

```
GetParmNumberArray(parmName, &parmVal)
```

Description

The GetParmNumberArray method retrieves a Number array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Number array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmInt method: OptBase class

Syntax

```
GetParmInt(parmName, &parmVal)
```

Description

The GetParmInt method retrieves an Integer parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify an Integer variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmIntArray method: OptBase class

Syntax

```
GetParmIntArray(parmName, &parmVal)
```

Description

The GetParmIntArray method retrieves a Number array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Number array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmString method: OptBase class

Syntax

```
GetParmString(parmName, &parmVal)
```

Description

The GetParmString method retrieves a String parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a String variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmStringArray method: OptBase class

Syntax

```
GetParmStringArray(parmName, &parmVal)
```

Description

The GetParmStringArray method retrieves a String array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a String array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmTime method: OptBase class

Syntax

```
GetParmTime(parmName, &parmVal)
```

Description

The GetParmTime method retrieves a Time parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Time variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

GetParmTimeArray method: OptBase class

Syntax

```
GetParmTimeArray(parmName, &parmVal)
```

Description

The GetParmTimeArray method retrieves a Time array parameter value that passed as input by any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Time array variable to contain the value passed as input by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

Init method: OptBase class

Syntax

```
Init()
```

Description

The Init method launches when the CreateOptEngine built-in function loads an analytic instance that uses the Optimization PeopleCode plug-in.

Use this method to perform additional processing for your own purposes, including checking table data, or any functionality you want to apply before any plug-in transactions run. You accomplish this by adding your own PeopleCode to the extended method.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run before any other code in your extended class.

Note

If you don't extend this method, PeopleSoft Optimization Framework calls its base version from the OptBase application class.

Parameters

None.

Returns

A Boolean value: True if the method is successful, False otherwise.

OptDeleteCallback method: OptBase class

Syntax

```
OptDeleteCallback(&Record)
```

Description

The OptDeleteCallback method launches when PeopleSoft Optimization Framework propagates to the datacache any database deletions that it encounters for a callback record.

Use this method to perform additional processing for your own purposes, including modifying any derived data structures that might be affected by the deletion. You accomplish this by adding your own PeopleCode to the extended method.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run.

Important

If you designate any record in the analytic type definition as a callback record, you must ensure that you extend this callback method in your derived class, even if the extended method contains only a Return statement. Otherwise the Optimization PeopleCode plug-in will fail.

Parameters

Parameter	Description
<i>&Record</i>	Specifies a record variable that contains the keys of the data row to be deleted.

Returns

A Boolean value: True if the method is successful, False otherwise.

OptInsertCallback method: OptBase class

Syntax

`OptInsertCallback(&Record)`

Description

The OptInsertCallback method launches when PeopleSoft Optimization Framework propagates to the datacache any database insertion that it encounters for a callback record.

Use this method to perform additional processing for your own purposes, including modifying any derived data structures that might be affected by the insertion. You accomplish this by adding your own PeopleCode to the extended method.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run.

Important

If you designate any record in the analytic type definition as a callback record, you must ensure that you extend this callback method in your derived class, even if the extended method contains only a Return statement. Otherwise the Optimization PeopleCode plug-in will fail.

Parameters

Parameter	Description
<i>&Record</i>	Specifies a record variable that contains the new data row to be inserted.

Returns

A Boolean value: True if the method is successful, False otherwise.

OptPostUpdateCallback method: OptBase class

Syntax

```
OptPostUpdateCallback(&OldRecord, &NewRecord)
```

Description

The OptPostUpdateCallback method launches after PeopleSoft Optimization Framework propagates to the datacache any database update that it encounters for a callback record.

Use this method to perform additional processing for your own purposes, including modifying any derived data structures that might have been affected by the update. You accomplish this by adding your own PeopleCode to the extended method. The parameters provide the previous and current content of the row.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run.

Important

If you designate any record in the analytic type definition as a callback record, you must ensure that you extend this callback method in your derived class, even if the extended method contains only a Return statement. Otherwise the Optimization PeopleCode plug-in will fail.

Parameters

Parameter	Description
<i>&OldRecord</i>	Specifies a record variable that contains the pre-update content of the data row that was updated.
<i>&NewRecord</i>	Specifies a record variable that contains the post-update content of the data row that was updated.

Returns

A Boolean value: True if the method is successful, False otherwise.

OptPreUpdateCallback method: OptBase class

Syntax

```
OptPreUpdateCallback(&OldRecord, &NewRecord)
```

Description

The `OptPreUpdateCallback` method launches before PeopleSoft Optimization Framework propagates to the datacache any database update that it encounters for a callback record.

Use this method to perform additional processing for your own purposes, including modifying any derived data structures that might be affected by the update. You accomplish this by adding your own PeopleCode to the extended method. The parameters provide the current and future content of the row.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run.

! Important

If you designate any record in the analytic type definition as a callback record, you must ensure that you extend this callback method in your derived class, even if the extended method contains only a `Return` statement. Otherwise the Optimization PeopleCode plug-in will fail.

Parameters

Parameter	Description
<i>&OldRecord</i>	Specifies a record variable that contains the pre-update content of the data row to be updated.
<i>&NewRecord</i>	Specifies a record variable that contains the post-update content of the data row to be updated.

Returns

A Boolean value: `True` if the method is successful, `False` otherwise.

OptRefreshCallback method: OptBase class

Syntax

```
OptRefreshCallback()
```

Description

The `OptRefreshCallback` method launches after PeopleSoft Optimization Framework propagates to the datacache all database insertions, deletions, and updates that it encounters for all callback records.

Use this method to perform additional processing for your own purposes, including modifying any derived data structures that might be affected by the modifications. You accomplish this by adding your own PeopleCode to the extended method.

Don't call this method in your own PeopleCode. It's called automatically at the appropriate moment by PeopleSoft Optimization Framework, which enables your added functionality to run.

! Important

If you designate any record in the analytic type definition as a callback record, you must ensure that you extend this callback method in your derived class, even if the extended method contains only a Return statement. Otherwise the Optimization PeopleCode plug-in will fail.

Parameters

None.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmDate method: OptBase class

Syntax

```
SetOutputParmDate(parmName, &parmVal)
```

Description

Use the SetOutputParmDate method to pass a Date parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
& <i>parmVal</i>	Specify a Date variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmDateArray method: OptBase class

Syntax

```
SetOutputParmDateArray(parmName, &parmVal)
```

Description

Use the SetOutputParmDateArray method to pass a Date array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Date array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmDateTime method: OptBase class

Syntax

```
SetOutputParmDateTime(parmName, &parmVal)
```

Description

Use the SetOutputParmDateTime method to pass a DateTime parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a DateTime variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmDateTimeArray method: OptBase class

Syntax

```
SetOutputParmDateTimeArray(parmName, &parmVal)
```

Description

Use the `SetOutputParmDateTimeArray` method to pass a `DateTime` array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the `OptBase` application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a <code>DateTime</code> array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmNumber method: OptBase class

Syntax

```
SetOutputParmNumber(parmName, &parmVal)
```

Description

Use the `SetOutputParmNumber` method to pass a `Number` parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the `OptBase` application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a <code>Number</code> variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmNumberArray method: OptBase class

Syntax

```
SetOutputParmNumberArray(parmName, &parmVal)
```

Description

Use the SetOutputParmNumberArray method to pass a Number array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
& <i>parmVal</i>	Specify a Number array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmInt method: OptBase class

Syntax

```
SetOutputParmInt(parmName, &parmVal)
```

Description

Use the SetOutputParmInt method to pass an Integer parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
& <i>parmVal</i>	Specify an Integer variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmIntArray method: OptBase class

Syntax

```
SetOutputParmIntArray(parmName, &parmVal)
```

Description

Use the SetOutputParmIntArray method to pass a Number array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
& <i>parmVal</i>	Specify a Number array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmString method: OptBase class

Syntax

```
SetOutputParmString(parmName, &parmVal)
```

Description

Use the SetOutputParmString method to pass a String parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.

Parameter	Description
<i>&parmVal</i>	Specify a String variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmStringArray method: OptBase class

Syntax

```
SetOutputParmStringArray(parmName, &parmVal)
```

Description

Use the SetOutputParmStringArray method to pass a String array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a String array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmTime method: OptBase class

Syntax

```
SetOutputParmTime(parmName, &parmVal)
```

Description

Use the SetOutputParmTime method to pass a Time parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Time variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

SetOutputParmTimeArray method: OptBase class

Syntax

```
SetOutputParmTimeArray(parmName, &parmVal)
```

Description

Use the SetOutputParmTimeArray method to pass a Time array parameter value as output from any method you develop that corresponds to an Optimization PeopleCode plug-in transaction. You develop the transaction method in an application class that you derive from the OptBase application class.

Parameters

Parameter	Description
<i>parmName</i>	Specify the name of the parameter as it's defined for the Optimization PeopleCode plug-in transaction.
<i>&parmVal</i>	Specify a Time array variable that contains a value to be passed as output by the parameter.

Returns

A Boolean value: True if the method is successful, False otherwise.

OptInterface Class Methods

This section discusses the optimization methods for the OptInterface PeopleCode class. The methods are listed in alphabetical order.

Note

You can use the OptInterface class methods only within an application class that you extend from the OptBase application class, or within PeopleCode that you call from that application class. This ensures that the OptInterface PeopleCode runs only on the optimization engine.

ActivateModel method: OptInterface class

Syntax

`ActivateModel(ModelID, SolverSettingID)`

Description

The ActivateModel method designates the specified model and solver setting as active. The model and the solver are initialized and populated with data from the current analytic instance.

Note

This method fails if the specified model (and by extension, one of its solver settings) is already active. If you want to activate a different solver setting for the same model, you must first deactivate the model.

See [DeactivateModel method: OptInterface class](#).

Parameters

Parameter	Description
<i>ModelID</i>	Specify the name of the optimization model you want to activate. This must be the name of one of the models associated with the analytic type definition.
<i>SolverSettingID</i>	Specify the name of the solver setting you want to activate. This is the name you specified for the solver setting in the analytic type definition.

Returns

This method returns a constant value. Valid values are:

Value	Description
%OptInter_Success	Returned if method succeeds.
%OptInter_Fail	Returned if the solver fails to solve the problem.

Example

```
Local integer &result;  
Local OptInterface &oi = CreateOptInterface();  
  
&result = &oi.ActivateModel("QE_PSA_MODEL", "abc");
```

ActivateObjective method: OptInterface class

Syntax

ActivateObjective(*Model_Name*, *Objective_Name*)

Description

Use the ActivateObjective method to activate the specified objective for an optimization model.

Parameters

Parameter	Description
<i>Model_Name</i>	Specify the name of the model.
<i>Objective_Name</i>	Specify the name of the objective.

Returns

This method returns a constant value. Valid values are:

Value	Description
%OptInter_Success	Returned if method succeeds.
%OptInter_Fail	Returned if the solver fails to solve the problem.

DeactivateModel method: OptInterface class

Syntax

DeactivateModel(*ModelID*)

Description

The DeactivateModel method detaches the solver from the specified model.

Parameters

Parameter	Description
<i>ModelID</i>	Specify the name of the optimization model you want to deactivate. This must be the name of one of the models associated with the analytic type definition.

Returns

This method returns a constant value. Valid values are:

Value	Description
%OptInter_Success	Returned if method succeeds.
%OptInter_Fail	Returned if the solver fails to solve the problem.

Example

```
Local integer &result;  
Local OptInterface &oi = CreateOptInterface();  
  
&result = &oi.DeactivateModel("QE_PSA_MODEL");
```

DumpMsgToLog method: OptInterface class

Syntax

`DumpMsgToLog(LogSeverity, Message)`

Description

The DumpMsgToLog method writes the specified status message to the optimization engine log file, with the specified severity.

Parameters

Parameter	Description
<i>LogSeverity</i>	Specify the severity level of the message, as one of the following system constants: • %Severity_Fatal • %Severity_Status • %Severity_Error • %Severity_Warn • %Severity_Info • %Severity_Trace1 • %Severity_Trace2
<i>Message</i>	Specify as a string the text of the log message.

Returns

None.

FindRowNum method: OptInterface class

Syntax

`FindRowNum(&Record [, startrow [, endrow [, field_list]])`

Where *field_list* is a list of field names in the form:

```
[fieldname1 [, fieldname2]]...
```

Description

The FindRowNum method determines the row number of a row in the datacache rowset. You provide a record with key values, and this method finds the row with the same key values and returns its row number.

Parameters

Parameter	Description
<i>&Record</i>	Specify a record with the same structure as the records that comprise the rowset, with its key fields populated.
<i>startrow</i>	Specify as an integer the starting row number of the search. Specify 0 to search from the first row in the rowset.
<i>endrow</i>	Specify as an integer the ending row number of the search. Specify 0 to search through the last row in the rowset.
<i>fieldname</i>	Specify the name of a field in the input record which contains a value to be matched. You can specify one or more field names, in any order. Note: If you use this parameter, the fields specified here are used to search, instead of the record's key fields. Any value that doesn't correspond to a field name is ignored.

Returns

The row number of the row containing the specified key values, or 0 if no row is found.

Example

The following example searches the whole scroll to find the partial key OPT_SITE:

```
Local Record &rec = CreateRecord(Scroll.OPT_TRANSCOST);
Local Optineterface &oi;

&rec.OPT_SITE.value = "New York";
int nRowNum = &oi.FindRowNum(&rec, 0, 0, "OPT_SITE");
```

The following example searches from row 5 to row 15 with the full key values New York and San Jose:

```
Local Record &rec = CreateRecord(Scroll.OPT_TRANSCOST);
Local Optineterface &oi;

&rec.OPT_SITE.value = "New York";
&rec.OPT_STORE.value = "San Jose";
int nRowNum = &oi.FindRowNum(&rec, 5, 15);
```

GetSolution method: OptInterface class

Syntax

```
GetSolution(ModelID, varArrayID, skipZero [, KeyFieldNames, KeyFieldValues [,  
&Solution]])
```

Description

The GetSolution method retrieves the model solution values generated by the Solve method.

Parameters

Parameter	Description
<i>ModelID</i>	Specify as a string the name of the optimization model for which you want the solution. This is the name used for the model definition in Application Designer.
<i>varArrayID</i>	Specify as a string the name of the variable array being optimized. Your application documentation should provide this name.
<i>skipZero</i>	Indicate whether solutions with a value of zero should be fetched. This parameter takes a Boolean value: • True: Don't fetch solutions with a zero value. This can increase the performance of the GetSolution method if zero values aren't meaningful. • False: Do fetch solutions with a zero value.
<i>KeyFieldNames</i> and <i>KeyFieldValues</i>	Specify a set of key field names as an array of string and a set of key field values as an equal length array of ANY, with one key field value corresponding to each key field name. You use these arrays to restrict the set of returned solutions. Solutions are returned only for model variables with the specified key field values. Note: If you provide either of these arrays, you must provide both. You can include each parameter from the variable array at most only once.
<i>&Solution</i>	Specify a rowset to contain the solutions.

Returns

This method returns a constant value. Valid values are:

Value	Description
%OptInter_Success	Returned if method succeeds.
%OptInter_Fail	Returned if the solver fails to solve the problem.

Example

```
Local array of string &strArray;  
Local array of any &valArray;  
Local integer &index;  
Local Rowset &rowSet;  
Local integer &result;  
Local string &modelId = "QE_PSA_MODEL";  
Local string &varArrayName = "X";  
Local boolean &bSkipZero = True;  
  
Local OptInterface &oi = CreateOptInterface();  
  
&strArray = CreateArrayRept("", 0);  
&valArray = CreateArrayAny();  
&rowSet = CreateRowset(Record.QEOPT_VAL_X_WRK);  
  
&strArray [1] = "EMPLID";  
&valArray [1] = 1;  
&strArray [2] = "ORDER_ID";  
&valArray [2] = 23;  
  
/* fetch only the part of the solution where  EMPLID = 1 and ORDER_ID = 23 */  
&result = &oi.GetSolution(&modelId, &varArrayName,  
    &bSkipZero, &strArray, &valArray, &rowSet);
```

GetSolutionDetail method: OptInterface class

Syntax

```
GetSolutionDetail(ModelID, SolutionType, Name, &Solution)
```

Description

The GetSolutionDetail method retrieves the model solution detail of the specified type generated by the Solve method. You can retrieve dual value, slack value, or reduced cost information.

Parameters

Parameter	Description
<i>ModelID</i>	Specify as a string the name of the optimization model for which you want the solution detail. This is the name used for the model definition in Application Designer.

Parameter	Description
<i>SolutionType</i>	Specify a system constant indicating the type of solution detail you want to retrieve. The value you specify here determines the content of the <i>Name</i> and <i>&Solution</i> parameters. • %OPT_DUAL: Retrieve the dual value attributes of the specified constraint block. • %OPT_SLACK: Retrieve the slack value attributes of the specified constraint block. • %OPT_RCOST: Retrieve the reduced cost attributes of the specified variable array.
<i>Name</i>	If you specified a <i>SolutionType</i> of %OPT_DUAL or %OPT_SLACK, specify here the name of a constraint block from the active model. If you specified a <i>SolutionType</i> of %OPT_RCOST, specify here the name of a variable array from the active model.
<i>&Solution</i>	Specify a rowset to contain the solution details. The rowset should have the same key fields as the constraint block or the variable array you specified with the <i>Name</i> parameter.

Returns

This method returns a constant value. Valid values are:

Value	Description
%OptInter_Success	Returned if method succeeds.
%OptInter_Fail	Returned if solver fails to solve the problem.

Example

```
Local Rowset &dual_rowset;  
Local integer &result;  
Local OptInterface &oi = CreateOptInterface();  
Local string &modelId = "QE_PSA_MODEL";  
Local string &varArrayName = "X";  
Local string &constrName = "Constraint_1";  
  
/* fetch dual values for Constraint "Constraint_1"  
   in a rowset based on the QEOPT_C1_WRK record */  
  
&dual_rowset = CreateRowset(Record.QEOPT_C1_WRK);  
&result = &oi.GetSolutionDetail(&modelId, %Opt_Dual, &constrName,  
&dual_rowset);
```

IsModelActive method: OptInterface class

Syntax

```
IsModelActive(ModelID)
```

Description

Use the `IsModelActive` method to determine if the model specified by *ModelID* is active before it is used.

Parameters

Parameter	Description
<i>ModelID</i>	Specify the model ID as a string. This is the name used for the model definition in Application Designer.

Returns

A Boolean value: true if the model is active, false otherwise.

RestoreBounds method: OptInterface class

Syntax

```
RestoreBounds(modelID [, varArrayID])
```

Description

The `RestoreBounds` method returns the bounding values of the specified variable array or arrays to the current settings in the specified model.

If you previously called the `SetVariableBounds` method with the *changeModelBounds* parameter set to true for any variable or variable array, those bounding values still apply.

Parameters

Parameter	Description
<i>modelID</i>	Specify as a string the name of the optimization model for which you want to restore the bounding values. This is the name used for the model definition in Application Designer.
<i>varArrayID</i>	Specify as a string the name of a variable array for which you want to restore the bounding values. Your application documentation should provide this name. If you don't specify a variable array name, the bounding values are restored for all variable arrays in the specified model.

Returns

%OptInter_Success if the method succeeds, %OptInter_Fail otherwise.

SetVariableBounds method: OptInterface class

Syntax

```
SetVariableBounds(modelID, varArrayID, boundType, lowerBound, upperBound,  
&keyRecord [, changeModelBounds])
```

Description

The SetVariableBounds method overrides the bounding values specified for a model variable array, or for a variable within the array.

Parameters

Parameter	Description
<i>modelID</i>	Specify as a string the name of the optimization model for which you want to override the bounding values. This is the name used for the model definition in Application Designer.
<i>varArrayID</i>	Specify as a string the name of the variable array being optimized. Your application documentation should provide this name.
<i>boundType</i>	Specify a system constant indicating which bounding values to override. The value you specify here determines how the <i>lowerBound</i> and <i>upperBound</i> parameters are applied to the specified model. • %OPT_LOWER_BOUND: Override only the lower bound as specified by the <i>lowerBound</i> parameter. The <i>upperBound</i> parameter is ignored. • %OPT_UPPER_BOUND: Override only the upper bound as specified by the <i>upperBound</i> parameter. The <i>lowerBound</i> parameter is ignored. • %OPT_BOUND_BOTH: Override both the lower bound and the upper bound as specified by the <i>lowerBound</i> and <i>upperBound</i> parameters, respectively.
<i>lowerBound</i>	Specify as a number the lower bound that should be applied to a variable or a variable array if the <i>boundType</i> parameter permits the override. You can also set this parameter to one of the following system constants:
<i>upperBound</i>	Specify as a number the upper bound that should be applied to a variable or a variable array if the <i>boundType</i> parameter permits the override. You can also set this parameter to one of the following system constants:

Parameter	Description
<i>&keyRecord</i>	Specify a record with the same key fields as the variable array being optimized. To override the bounding values specified for a single variable within the array, populate the record's key fields to specify the variable. To override the bounding values specified for the entire variable array, set all of the record's fields to a null value. Note: You must either provide values for all keys, or set them all to null values.
<i>changeModelBounds</i>	Specify a Boolean value: • true: Indicates that the specified model should be updated in memory to reflect the specified variable bounds. Any analytic instance that invokes this model from the active optimization engine is affected by these settings, which are propagated to the solver in memory. This is the default value if you omit this parameter. • false: Indicates that the specified model should not be updated in memory, and that the specified variable bounds apply only to the next time the Solve method is called.

Returns

%OptInter_Success if the method succeeds, %OptInter_Fail otherwise.

Example

```

Local Record &rec;
Local integer &result;
Local OptInterface &oi = CreateOptInterface();
Local float &objval = 0.0;
Local string &modelId = "QE_PSA_MODEL";
Local string &varArrayName = "X";
Local float &lb = 0.0;
Local float &ub = 0.0;

&rec = CreateRecord(Record.QEOPT_VAL_X_WRK);
&rec.QEOPT_RESINDEX.Value = 1;
&rec.QEOPT_SOLINDEX.Value = 2;
&rec.QEOPT_TIMEINDEX.Value = 3;

&result = &oi.SetVariableBounds(&modelId, &varArrayName,
    %Opt_Upper_Bound, &lb, &ub, &rec, False);

```

SetVariableType method: OptInterface class

Syntax

```
SetVariableType(modelID, varArrayID, varType)
```

Description

Use the SetVariableType method to change the data type of a model variable array.

Parameters

Parameter	Description
<i>ModelID</i>	Specify as a string the name of the optimization model for which you want to change the variable type. This must be the name of one of the models associated with the analytic type definition.
<i>varArrayID</i>	Specify as a string the name of the variable array for which you want to change the variable type. Your application documentation should provide this name.
<i>varType</i>	Specify one of the following system constants representing the new variable type: • %Opt_Var_Cont: Represents a continuous variable type, which can be any floating point value. • %Opt_Var_Bin: Represents a binary variable type, for which the value can be only 0 or 1. • %Opt_Var_Int: Represents an integer variable type, which can be any integer.

Returns

%OptInter_Success if the method succeeds, %OptInter_Fail otherwise.

Example

```

Local OptInterface &oi = CreateOptInterface();
Local string &varArrayName = "X";
Local integer &result;

&result = &oi.SetVariableType("QE_PSA_MODEL", &varArrayName, %Opt_Var_Bin);

If (&result <> %OptInter_Success) Then
    &oi.DumpMsgToLog(%Severity_Status, "Failed to change variable type ");
End-If;

```

Solve method: OptInterface class

Syntax

```
Solve(modelID, SolutionType [, &objValue [, name-value_pairs]])
```

Where *name-value_pairs* is a list of solver setting parameter values in the form:

```
[parmname1, parmvalue1 [, parmname2, parmvalue2]]...
```

Description

The Solve method solves the specified model using the currently active solver settings, and provides an objective value as the solution output. You can override the solver setting parameters. The returned solution status is a predefined system constant.

Parameters

Parameter	Description
<i>ModelID</i>	Specify as a string the name of the optimization model you want to solve. This is the name used for the model definition in Application Designer.
<i>SolutionType</i>	Specify a system constant indicating the type of solution detail you want the model to be solved for. • %OPT_DUAL: Generate dual value attributes. • %OPT_SLACK: Generate slack value attributes. • %OPT_RCOST: Generate reduced cost attributes. You can also combine any or all of these system constants, by connecting them with a plus sign (+), for example: %OPT_DUAL + %OPT_RCOST.
<i>&objValue</i>	Specify a reference to a variable of type float. This variable contains the output objective value produced by the solver upon successfully solving the specified optimization model.
<i>parmname</i> and <i>parmvalue</i>	Specify a solver setting parameter ID and value to override the original value you specified for the solver setting in the analytic type definition. You can override any or all of the solver setting parameter values. See Optimization Framework: Configuring Models for Optimization.

Returns

One of the following system constants:

%OptInter_Fail: The solver fails to solve the problem.

%Opt_Optimal: The solution is optimal.

%Opt_Infeasible: The solution is infeasible.

%Opt_Unbounded: The solution is unbounded.

%Opt_Timeup: The solver reached the time limit specified in the solver setting.

%Opt_Iterlimit: The solver reached the limit on the number of iterations specified in the solver setting.

%Opt_LP_Max_Sols: The solver generated maximum number of solutions without improvement.

%Opt_Idle: The solution shows no improvement in a specified time limit.

%Opt_Unknown: The solver status is unknown.

%Opt_MIP_NumSolutions: The specified number of solutions corresponding to an MIP solver reached.

%Opt_MIP_NumNodes: The specified number of nodes corresponding to an MIP solver reached.

%Opt_Aborted: The solver aborted.

%Opt_User_Exit: A user exit was encountered.

%Opt_First_LP_NoOpt: While solving an MIP, the first LP solution obtained was not optimal.

Example

Following is an example of the basic use of the Solve method:

```
Local OptInterface &oi = CreateOptInterface();

Local float &objval = 0.0;
Local integer &result;
Local string &modelId = "QE_PSA_MODEL";
Local string &varArrayName = "X";
Local integer &solType;

&solType = %Opt_RCost + %Opt_Dual + %Opt_Slack;

/* Solve the problem */
&result = &oi.Solve("QE_PSA_MODEL", &solType, &objval);

If & result = %Opt_Optimal Then
    &oi.DumpMsgToLog(%Severity_Warn, " Solution Status = " Optimal !!!");
Else
    &oi.DumpMsgToLog(%Severity_Warn, " Solution Status = " | &result );
End-If;
```

Following is an example of a solver setting parameter override:

```
Local OptInterface &oi = CreateOptInterface();
Local float &objval = 0.0;
Local integer &result;

/* This overrides the solver setting for MPS_Filename and generates
   an MPS file called myfile.mps instead of the name specified
   in the current solver setting parameter. */

&result = &oi.Solve("QE_PSA_MODEL", %Opt_Primal, &objval, "MPS_FileName",
    "myfile");
```

Page Class

Understanding Page Class

Use the page class to manipulate a page in a component. The most common use of this class is to hide or display a page in a component, either based on field values or the level of security of the user.

Generally, the PeopleCode used to manipulate a page object is associated with PeopleCode in the Activate event.

Note

The page object should not be used until after the page processor has loaded the page: do not instantiate this object in RowInit PeopleCode, use it in PreBuild, PostBuild or Activate instead.

In addition, if you need to hide the current page, PeopleSoft recommends using the PreBuild event for your program.

Related Topics

- PeopleCode Developer's Guide: Component Build Processing in Update Modes

Shortcut Considerations

An expression of the form

`PAGE.pagename.property`

is equivalent to `GetPage(PAGE.name).property`. For example, the following two lines of code are equivalent:

```
PAGE.MANAGER_APPROV.DisplayOnly = False;
```

```
GetPage(PAGE.MANAGER_APPROV).DisplayOnly = False;
```

Data Type of a Page Object

Use the Page data type to declare Page objects. For example,

```
Local Page &MYPAGE;
```

Scope of a Page Object

A page object can be instantiated from PeopleCode only.

Use this object only in PeopleCode programs that are associated with an online process, not in an Application Engine program, a message subscription, a Component Interface, and so on.

In addition, the page object should not be used until after the page processor has loaded the page: do not instantiate this object in RowInit PeopleCode. Use it in PostBuild or Activate instead.

Page Class Built-in Function

PeopleCode Language Reference: GetPage function

Page Class Properties

In this section, we discuss each Page class properties.

CopyURLLink property: Page class

Description

Use this property to enable the **http** link for a component. Clicking this link copies the address (URL) of the page to the clipboard. This is a Pagebar property.

Note

If you select the **Disable Pagebar** check box for the component in Application Designer, you cannot set any of the Pagebar properties using PeopleCode. If you deselect the **Copy URL Link** check box for the component in Application Designer, you can still set this option using this property.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Use Properties

CustomizePageLink property: Page class

Description

Use this property to enable **Customize Page** link for a component. Clicking this link enables the user to control the initial display of the component. This property takes a Boolean value, true, the user can control the display, false otherwise. This is a Pagebar property.

Note

If you select the **Disable Pagebar** check box for the component in the Application Designer, you cannot set any of the Pagebar properties using PeopleCode. If you deselect the **Customize Page Link** check box for the component in Application Designer, you can still set this option using this property.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Use Properties

DisplayOnly property: Page class

Description

Use this property to make a page display-only, or to enable a page so the fields can be edited. This property takes a Boolean value: True if the page is display-only, False otherwise.

Note

You cannot enable or disable the current page.

The value of DisplayOnly for a page is restored to the value set in Application Designer when the user goes to another component. This means you must set DisplayOnly for the page each time a component is accessed.

This property is read/write.

Example

```
If &MYPAGE.DisplayOnly Then
    &MYPAGE.Visible = True;
Else
    &MYPAGE.Visible = False;
End-If;
```

HelpLink property: Page class

Description

Use this property to enable the **Help** link for a component. Clicking this link accesses the online help PeopleBook entry for the current page. This is a Pagebar property.

Note

If you select the **Disable Pagebar** check box for the component in the Application Designer, you cannot set any of the Pagebar properties using PeopleCode. If you deselect the **Help Link** check box for the component in Application Designer, you can still set this option using this property.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Use Properties

Name property: Page class

Description

This property returns a reference to the page name definition (a string value.)

This property is read-only.

Example

```
&MYPAGENAME = &MYPAGE.Name;
```

NewWindowLink property: Page class

Description

Use this property to enable **New Window** link for a component. Clicking this link opens a new browser window with the search page for the current component. Users can view or enter data in the new window. This is a Pagebar property.

Note

If you select the **Disable Pagebar** check box for the component in the Application Designer, you cannot set any of the Pagebar properties using PeopleCode. If you deselect the **New Window Link** check box for the component in Application Designer, you can still set this option using this property.

This property is read/write.

Related Topics

- Application Designer Developer's Guide: Setting Use Properties

Visible property: Page class

Description

Use this property to set the visibility of a page. If this property is set to True, the page is visible. If this property is set to False, the page is not visible. When the visibility is changed, the

component tabs and menus are also automatically changed to reflect the new settings. Menus and tabs return to their original values when the user navigates to another component. In addition, if a page is set to be hidden in the component definition, you can change the value of the page to be visible at runtime.

Oracle recommends using the PreBuild event if you need to hide the current page.

Important

If the visibility of the current page is set to False in a PeopleCode program, then you must invoke the TransferPage function to transfer control to a visible page.

Note

Page visibility alone (as set by the Visible property) does not determine whether a user can see a page. Visibility plus the permissions to access the page together determine whether a specific page is displayed to a particular user.

Example

In the following example, a page is hidden based on the value of the current field.

```
If PAYROLE_TYPE = "Global" Then  
    PAGE.JOB_EARNINGS.Visible = False;  
End-If;
```

Related Topics

- PeopleCode Language Reference: TransferPage function
- Security Administration: Setting Page Permissions
- Application Designer Developer's Guide: Setting Page Attributes

PeopleSoft Search Framework Classes

Understanding the PeopleSoft Search Framework Classes

In previous PeopleTools releases, search functionality was provided in a non-declarative fashion in which search engine indexes were built using custom PeopleCode and Application Engine programs. Each PeopleSoft application used a unique method for creating and maintaining search artifacts like collections and indexes—all of which required search engine-specific calls, commands, syntax, and so on.

The PeopleSoft Search Framework enables application developers and implementation teams to create search artifacts in a declarative manner and to deploy and maintain search indexes using one standard interface, regardless of PeopleSoft application.

The PeopleSoft Search Framework consists of PeopleSoft components (pages and records provided by PeopleTools), which provide a centralized interface for configuring PeopleSoft integration with the search engine, creating search artifacts such as search definitions and search categories, and building and maintaining search indexes. The PeopleSoft Search Framework was developed to provide an interaction layer that is independent of any specific search engine. In particular, the PeopleSoft Search Framework classes documented in this chapter are general purpose classes not associated with any particular search engine.

In addition to the user interface, the PeopleSoft Search Framework is supported by several PeopleCode application classes including PT_SEARCH and several PTSF application packages. The PT_SEARCH application package provides the administration and query service interfaces for integration with web service based free-text search engines. The root package comprises a factory class, interfaces, superclasses, and implementations for classes that are not dependent on a specific search engine.

Related Topics

- Search Technology

Instantiating a SearchQuery Object

With the PeopleSoft Search Framework, a SearchQuery object is instantiated by instantiating a SearchFactory object, which is used to create a SearchQueryService object. The SearchQuery object is then instantiated from the SearchQueryService.

The high-level program flow is as follows:

```
import PT_SEARCH:SearchFactory;
import PT_SEARCH:SearchQueryService;
import PT_SEARCH:SearchQuery;

Local PT_SEARCH:SearchFactory &factory = create PT_SEARCH:SearchFactory();
Local PT_SEARCH:SearchQueryService &svc =
&factory.CreateQueryService("default");
Local PT_SEARCH:SearchQuery &srchQuery = &svc.CreateQuery();
```

Importing PeopleSoft Search Framework Classes

The PeopleSoft Search Framework classes are application classes, not built-in classes, like Rowset, Field, Record, and so on. Before you can use these classes in your PeopleCode program, you must import them into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

Performing a Simple Search

The following example code demonstrates how to retrieve properties of the SearchResultCollection and how to iterate over the results in the collection:

1. Import the application package.

```
import PT_SEARCH.*;
```

2. Create an instance of SearchQueryService and SearchFactory.

```
Local PT_SEARCH:SearchFactory &factory = create PT_SEARCH:SearchFactory();  
Local PT_SEARCH:SearchQueryService &svc =  
&factory.CreateQueryService("default");
```

3. Instantiate the SearchQuery object.

```
Local PT_SEARCH:SearchQuery &srchQuery = &svc.CreateQuery();
```

4. Initialize the search query by setting properties.

```
&srchQuery.QueryText = "some text";  
&srchQuery.Language = &lang_cd;  
&srchQuery.MarkDuplicates = False;  
&srchQuery.RemoveDuplicates = False;
```

5. Execute the search query.

Use the Execute method and specify two integer parameters: *start* determines the index of the first document, *size* determines the number of search documents to return "page" of results.

```
Local number &start = 1;  
Local number &size = 10;  
  
Local PT_SEARCH:SearchResultCollection &results;  
&results = &srchQuery.Execute(&start, &size);
```

6. Process the search query results

The search query returns a SearchResultCollection. To process this collection: The SearchResultCollection contains SearchResult objects. Each SearchResult has its own

methods to access its attributes such as Title, Summary, URL Link, and so on. Each SearchResult also optionally has custom attributes that can be accessed through the SearchFieldCollection object.

```

Local number &i, &j;
Local number &score;
Local string &title;
Local string &summary;
Local datetime &lastMod;
Local string &url;
Local string &name;
Local string &value;

Rem - Get a couple return properties;

Local number &docCount = &results.GetDocumentCount();
Local number &hitCount = &results.GetEstimatedHitCount();

Rem - Iterate through the search results;

Local PT_SEARCH:SearchResult &curResult;
Local PT_SEARCH:SearchFieldCollection &customs;
For &i = 1 To &results.GetDocumentCount()
    &curResult = &results.Item(&i);
    &score = &curResult.GetScore();
    &title = &curResult.GetTitle();
    &summary = &curResult.GetSummary();
    &lastMod = &curResult.GetLastModified();
    &url = &curResult.GetUrlLink();

    /* Do something with these result attributes          */

Rem - Get the custom fields of the result if any;

&customs = &curResult.GetCustomAttributes();
If (&customs <> Null) Then

    Rem - Iterate through custom fields of the result;
    For &j = 1 To &customs.Count()
        &name = &customs.Item(&j).Name;
        &value = &customs.Item(&j).Value;

        /* do something with the custom field          */

    End-For;
End-If;
End-For;

Rem - Calculate the number of additional pages in the results;
Local integer &pages;

&pages = Idiv(&hitCount, &size);
If Mod(&hitCount, &size) > 0 Then
    &pages = &pages + 1;
End-If;

```

Rem - Render the additional pages as links;

7. Get the page number for the next request.

Re-execute the search query to retrieve the next page. Increment *start* to the next page; then invoke the Execute method.

Rem - Get the requested page from the link clicked by the user;
Rem - Store the value in the &req_page variable;
Local integer &req_page;

Rem - Calculate the new start value and re-execute the query;
&start = (&req_page - 1) * &size + 1;
&results = &srchQuery.Execute(&start, &size);

The preceding example returns the results in chunks, or pages, which provides better query performance than returning all results at once. However, you could elect to return all results in a single search query. In that case, you will need to consider the maximum number of results returned by the search engine. For example, let's consider a case where 200 is the default value for the maximum number of results. In this case, the Execute method would be invoked as follows to return all results at once:

```
Local number &start = 1;  
Local number &size = 200;
```

```
Local PT_SEARCH:SearchResultCollection &results;  
&results = &srchQuery.Execute(&start, &size);
```

Related Topics

- [Additional Search Examples](#)
This section provides additional code examples for the PeopleSoft Search Framework: Searching using facets.
- [Search Filter Generator Examples](#)
This section provides additional code examples for generating search filters using the SearchFilterGenerator class:

PeopleSoft Search Framework Classes Reference

This reference section documents the following classes from the PT_SEARCH application package:

- AssociatedFacet class
- FacetFilter class
- FacetNode class
- SearchAttribute class
- SearchCategory class
- SearchFactory class
- SearchField class
- SearchFieldCollection class

- SearchFilter class
- SearchFilterGenerator class
- SearchQuery class
- SearchQueryCollection class
- SearchQueryService class
- SearchResult class
- SearchResultCollection class

This reference section also documents the following classes from the PTSF_SECURITY application package: SearchAuthnQueryFilter class.

PeopleSoft Search Framework Classes Built-in Functions

PeopleCode Language Reference: EncodeSearchCode function

AddConfiguration Class

This section provides an overview of the AddConfiguration class and discusses its methods.

The AddConfiguration class is used to retrieve add a new value configuration properties of a content reference when the content reference is configured on the Manage Configurable Search page.

Related Topics

- Search Technology: Working with Configurable Search

AddConfiguration Class Methods

In this section, the AddConfiguration class methods are presented in alphabetical order.

AddConfiguration method: AddConfiguration class

Syntax

```
AddConfiguration()
```

Description

Use the AddConfiguration method to instantiate an object of the AddConfiguration class.

Parameters

None.

Returns

None.

Example

```
Local PTS_CFGSRCH_CRITERIA:AddConfiguration &addObj = create  
PTS_CFGSRCH_CRITERIA:AddConfiguration();
```

GetAddPageInstructionsInfo method: AddConfiguration class

Syntax

```
GetAddPageInstructionsInfo()
```

Description

Use the GetAddPageInstructionsInfo method to retrieve instructions to display on the add a new value page.

Parameters

None.

Returns

A string value containing the instructions to display on the add a new value page.

Example

```
&addObj.GetAddPageInstructionsInfo();
```

GetAddPageTitleInfo method: AddConfiguration class

Syntax

```
GetAddPageTitleInfo()
```

Description

Use the GetAddPageTitleInfo method to retrieve the specified title for an add a new value page.

Parameters

None.

Returns

A string value containing the page title.

Example

```
&addObj.GetAddPageTitleInfo();
```

GetAddSearchRecord method: AddConfiguration class

Syntax

```
GetAddSearchRecord()
```

Description

Use the GetAddSearchRecord method to retrieve the search record specified on the add a new value page for a content reference.

Parameters

None.

Returns

A string value containing the search record for the add a new value page.

Example

```
&addObj.GetAddSearchRecord();
```

GetConfiguredAppClass method: AddConfiguration class

Syntax

```
GetConfiguredAppClass()
```

Description

Use the GetConfiguredAppClass method to retrieve the configured application class for the Add button override.

Parameters

None.

Returns

A string value containing the application class.

Example

```
&addObj.GetConfiguredAppClass();
```

GetConfiguredAppClassMethod method: AddConfiguration class

Syntax

```
GetConfiguredAppClassMethod()
```


Description

Use the `GetConfiguredAppClassMethod` method to retrieve the configured method of the application class for the Continue button override.

Parameters

None.

Returns

A string value containing the method of the application class.

Example

```
&addObj.GetConfiguredAppClassMethod();
```

GetConfiguredApppackage method: AddConfiguration class

Syntax

```
GetConfiguredApppackage()
```

Description

Use the `GetConfiguredApppackage` method to retrieve the configured application package for the Continue button override.

Parameters

None.

Returns

A string value containing the configured application package.

Example

```
&addObj.GetConfiguredApppackage();
```

GetConfiguredClassPath method: AddConfiguration class

Syntax

```
GetConfiguredClassPath()
```

Description

Use the `GetConfiguredClassPath` method to retrieve the configured application class path for the Continue button override.

Parameters

None.

Returns

A string value containing the application class path.

Example

```
&addObj.GetConfiguredClassPath();
```

GetCriteriaFields method: AddConfiguration class

Syntax

```
GetCriteriaFields()
```

Description

Use the GetCriteriaFields method to retrieve the criteria fields selected for the add a new value page.

Parameters

None.

Returns

An array of PTS_CFGSRCH_CRITERIA:AddField.

Example

```
&addObj.GetCriteriaFields();
```

GetPageLinksList method: AddConfiguration class

Syntax

```
GetPageLinksList()
```

Description

Use the GetPageLinksList method to retrieve the page links specified on the add a new value page.

Parameters

None.

Returns

An array of PTS_CFGSRCH_CRITERIA:PageLink.

Example

```
&addObj.GetPageLinksList();
```

AssociatedFacet Class

This section provides an overview of the AssociatedFacet class and discusses AssociatedFacet class methods.

The AssociatedFacet class is used to extend the PeopleTools-delivered PeopleSoft Search Framework by allowing the use of application-specific association keys. This class must be implemented to return the value of the AssociationValue property of the FacetFilter class.

Related Topics

- [AssociationValue property: FacetFilter class](#)

AssociatedFacet Class Methods

In this section, the AssociatedFacet class methods are presented in alphabetical order.

getAssociatedFacetValue method: AssociatedFacet class

Syntax

```
getAssociatedFacetValue(category, facet, user)
```

Description

Use this method to return an application-specific association key for the specified user.

An application that requires an associated facet value must implement and extend the getAssociatedFacetValue abstract method.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>category</i>	Specifies the search category name as a string.
<i>facet</i>	Specifies the facet name as a string.
<i>user</i>	Specifies the search user name as a string.

Returns

A String value.

DashboardFilters Class

This section provides an overview of the DashboardFilters class and discusses its methods.

Create an application class extending the DashboardFilters class to return created filters for Insights dashboards.

DashboardFilters Class Methods

In this section, the DashboardFilters class methods are presented in alphabetical order.

Related Topics

- [FilterValues Class Methods](#)

In this section, the FilterValues class methods are presented in alphabetical order.

GetDashboardFilter

Syntax

```
GetDashboardFilter(&sCrefReferer,&sDashboardName,&nMode)
```

Description

Use the GetDashboardFilter method to use filters on dashboards to display the desired visualization.

Parameters

Parameter	Description
<i>&sCrefReferer</i>	Specifies the content reference in which the dashboard is displayed in the panel on the right.
<i>&sDashboardName</i>	Specifies the dashboard for which the current filter is applicable.
<i>&nMode</i>	Specifies the mode in which the dashboard is presented as an integer. Valid values are: • 1 - Full view • 2 - Right frame • 3 - Tile view.

Returns

A FilterValues object.

Example

The following example extends the DashboardFilters class and uses the NotEquals filter.

```
import PTSF_INSIGHTS:DashboardFilters;
import PTSF_INSIGHTS:FilterValues;

class FVAPPCLS1 extends PTSF_INSIGHTS:DashboardFilters
  method GetDashboardFilter(&sCrefReferer As string, &sDashboardName As
string, &nMode As integer) Returns array of PTSF_INSIGHTS:FilterValues
end-class;
```

```
method GetDashboardFilter
    /* &sCrefReferer as String, */
    /* &sDashboardName as String, */
    /* &nMode as Integer */
    /* Returns Array of PTSF_INSIGHTS:FilterValues */
    /* Extends/implements PTSF_INSIGHTS:DashboardFilters.GetDashboardFilter */
    Local array of PTSF_INSIGHTS:FilterValues &filter;
    Local PTSF_INSIGHTS:FilterValues &NotContNum;
    &NotContNum.NotEquals().Key("INV_ITEM_ID_ORCL_ES_ENG", "",
True).Value("15041");
    &filter.Push(&NotContNum);
    Return &filter;
end-method;
```

FacetFilter Class

This section provides an overview of the FacetFilter class and discusses:

- FacetFilter class methods.
- FacetFilter class properties.

The FacetFilter class is used to filter the search results on one or more facet values. Facets are aspects, properties, or characteristics of a piece of data. In a PeopleSoft application, this could be PeopleSoft metadata (for example, SETID or business unit), or it could be any other attribute of the data. For example, job openings could be classified (faceted) by location, department or job family, working hours, pay scale, posting date, business unit, SETID, and so on. Facets allow for “filtered search” or “filtered navigation” of search results.

Related Topics

- Search Technology: Working With Facets
- Search Technology: Working with Search Results in Fluid User Interface
- Applications User’s Guide: Working with Search Results

FacetFilter Class Methods

In this section, the FacetFilter class methods are presented in alphabetical order.

clearFacetSorting method: FacetFilter class

Syntax

```
clearFacetSorting()
```

Description

Use this method to reset facet sorting on all levels to default sorting values.

Parameters

None.

Returns

None.

FacetFilter method: FacetFilter class

Syntax

```
FacetFilter(FacetName, Path)
```

Description

Use this constructor to instantiate a FacetFilter object for a specific facet to indicate the facet and path.

Parameters

Parameter	Description
<i>FacetName</i>	Specifies the name of the facet as a string.
<i>Path</i>	Specifies the value of the facet as a string.

Returns

A FacetFilter object.

Example

The following examples demonstrate four ways to create a facet filter:

- Use the SearchCategory class to return the initial list of facet filters with empty paths as an array of FacetFilter objects:

```
Local PT_SEARCH:SearchCategory &srchCat = create PT_SEARCH:SearchCategory⇒  
("MY_SRCH_CAT");  
&qry.Categories = CreateArray(&srchCat);  
  
&qry.FacetFilters = &srchCat.GetFacetFilters();
```

- When requesting a specific facet for the first time, specify an empty string for the path:

```
Local PT_SEARCH:FacetFilter &facetFilter = create  
PT_SEARCH:FacetFilter("LOCATION",⇒  
"")
```

- When the facet is hierarchical, specify the hierarchy in the path. For example, the LOCATION facet could have a hierarchy of country/state/city. To filter by country, use the following filter:

```
Local PT_SEARCH:FacetFilter &facetFilter = create PT_SEARCH:FacetFilter⇒  
("LOCATION","USA")
```

- To filter by state, use the following filter:

```
Local PT_SEARCH:FacetFilter &facetFilter = create PT_SEARCH:FacetFilter⇒  
("LOCATION", "USA/CA")
```

Related Topics

- [GetFacetFilters method: SearchCategory class](#)

getFacetSortings method: FacetFilter class

Syntax

```
getFacetSortings()
```

Description

Use this method to return a map of facet sortings as a StringMap object. If no facet sorting is defined, the map will be of size 0.

Parameters

None.

Returns

A StringMap Object.

getFacetValuesSortType method: FacetFilter class

Syntax

```
getFacetValuesSortType(level)
```

Description

Use this method to return the sort type for the specified level.

Parameters

Parameter	Description
<i>level</i>	Specifies the level in the facet path hierarchy as an integer. For facets without a path hierarchy, specify 1.

Returns

A string value.

hasCustomFacetSorting method: FacetFilter class

Syntax

```
hasCustomFacetSorting(level)
```

Description

Use this method to verify whether the default facet sorting has been overridden for the specified level.

Parameters

Parameter	Description
<i>level</i>	Specifies the level in the facet path hierarchy as an integer. For facets without a path hierarchy, specify <i>1</i> .

Returns

A Boolean value. True if facet sorting has been overridden for the specified level, False otherwise.

sortFacetValuesAlphabetically method: FacetFilter class

Syntax

```
sortFacetValuesAlphabetically(level, sort_ascending)
```

Description

Use this method to sort facet values for the specified level alphabetically.

Parameters

Parameter	Description
<i>level</i>	Specifies the level in the facet path hierarchy as an integer. For facets without a path hierarchy, specify <i>1</i> .
<i>sort_ascending</i>	Specifies the sorting order: True for ascending order and False for descending order sorting.

Returns

None.

sortFacetValuesByDocumentCount method: FacetFilter class

Syntax

```
sortFacetValuesByDocumentCount(level, sort_ascending)
```

Description

Use this method to sort facet values for the specified level by the document count.

Parameters

Parameter	Description
<i>level</i>	Specifies the level in the facet patch hierarchy as an integer. For facets without a path hierarchy, specify <i>1</i> .
<i>sort_ascending</i>	Specifies the sorting order: True for ascending order and False for descending order sorting.

Returns

None.

sortFacetValuesByType method: FacetFilter class

Syntax

```
sortFacetValuesByType(level, sort_type)
```

Description

Use this method to define the sort type by specifying a string value. This method can be used instead of `sortFacetValuesByDocumentCount`, `sortFacetValuesAlphabetically`, and `sortFacetValuesNumerically` methods.

Parameters

Parameter	Description
<i>level</i>	Specify the level in the facet path hierarchy. For facets without a path hierarchy, specify <i>1</i> .

Parameter	Description
<i>sort_type</i>	Specifies the sort type as one of the following string values: • <i>ALPHA_DES</i> – Sort alphabetically descending. • <i>ALPHA_ASC</i> – Sort alphabetically ascending. • <i>COUNT_DES</i> – Sort by document count descending. • <i>COUNT_ASC</i> – Sort by document count ascending. • <i>NUMBER_ASC</i> – Sort numerically ascending. • <i>NUMBER_DES</i> – Sort numerically descending.

Returns

None.

sortFacetValuesNumerically method: FacetFilter class

Syntax

```
sortFacetValuesNumerically(level, sort_ascending)
```

Description

Use this method to sort facet values numerically for the specified level. If the facet values are not numbers, this method will cause an error when it is executed at run time.

Parameters

Parameter	Description
<i>level</i>	Specifies the level in the facet path hierarchy as an integer. For facets without a path hierarchy, specify <i>1</i> .
<i>sort_ascending</i>	Specifies the sorting order as a Boolean value: True for ascending order and False for descending order sorting.

Returns

None.

FacetFilter Class Properties

In this section, the FacetFilter class properties are presented in alphabetical order.

AssociationValue property: FacetFilter class

Description

Use this property to set or return the association value for this facet as a string. The association value is used to select the first level of associated facets.

This property is read/write.

FacetLabel property: FacetFilter class

Description

Use this property to set or return the long description for the facet as a string. This description appears as the label for the facet in the user interface.

This property is read/write.

FacetName property: FacetFilter class

Description

Use this property to set or return the name of the facet as a string.

This property is read/write.

Path property: FacetFilter class

Description

Use this property to set or return the value for facet as a path string.

This property is read/write.

Example

The Path property is implicitly set to the value of the *Path* parameter supplied in the constructor for the FacetFilter class. In this example, the Path property is set to USA/CA:

```
&facetFilter = create PT_SEARCH:FacetFilter("LOCATION","USA/CA")
```

However, the Path property can also be explicitly set as in the following example:

```
&facetFilter.Path = "USA/CO/Denver";
```

FacetNode Class

This section provides an overview of the FacetNode class and discusses:

- FacetNode class methods.
- FacetNode class properties.

The FacetNode class extends the FacetFilter class and is used to return the list of facet node values along with other information about the facet nodes.

Facet nodes are used to render the list of facet values of a particular facet for a given search. This list of facet nodes is retrieved using GetFacetNodes method of the SearchResultCollection. Since a facet node is constructed with a facet path, this information can be used to create a facet filter indicating that the user has chosen to filter the results further based on the facet node.

Related Topics

- [FacetFilter Class](#)
This section provides an overview of the FacetFilter class and discusses:
- [GetFacetNodes method: SearchResultCollection collection](#)

FacetNode Class Methods

In this section, the FacetNode class methods are presented in alphabetical order.

addChild method: FacetNode class

Syntax

```
addChild(&node)
```

Description

Use this method to add a child facet node to the current facet node.

Parameters

Parameter	Description
<i>&node</i>	Specifies the child facet node as a FacetNode object.

Returns

None.

FacetNode method: FacetNode class

Syntax

```
FacetNode(FacetName, NodeName, Path, DisplayValue, DocCount)
```

Description

Use this constructor to instantiate a FacetNode object for a specific facet.

Parameters

Parameter	Description
<i>FacetName</i>	Specifies the name of the facet as a string and is used to refer to that member of the superclass.
<i>NodeName</i>	Specifies the name of this facet node as a string.
<i>Path</i>	Specifies the value of the facet as a string and is used to refer to that member of the superclass.
<i>DisplayValue</i>	Specifies the display value for this facet node as a string.
<i>DocCount</i>	Specifies an integer representing the number of documents that would be returned if this facet node were selected as a search filter.

Returns

A FacetNode object.

getChildNodes method: FacetNode class

Syntax

```
getChildNodes()
```

Description

Use this method to return an array of child nodes.

Parameters

None.

Returns

An array of FacetNode objects.

Related Topics

- [addChild method: FacetNode class](#)

FacetNode Class Properties

In this section, the FacetNode class properties are presented in alphabetical order.

DisplayValue property: FacetNode class

Description

Use this property to set or return the display value for this facet node as a string.

This property is read/write.

DocumentCount property: FacetNode class

Description

Use this property to set or return an integer representing the number of documents that would be returned if this facet node were selected as a search filter.

This property is read/write.

FacetValue property: FacetNode class

Description

Use this property to set or return the value of this facet node as a string.

This property is read/write.

The FacetName, FacetValue, and DisplayValue are all closely related. For example, consider the following facet filter: `FacetFilter("LOCATION","USA")`. These properties would have the following values:

- FacetName: LOCATION
- FacetValue: USA
- DisplayValue: United States

Related Topics

- [DisplayValue property: FacetNode class](#)
- [FacetName property: FacetFilter class](#)

HasChildren property: FacetNode class

Description

Use this property to set or return a Boolean value indicating whether this facet node has children.

This property is read/write.

FilterValues Class

This section provides an overview of the FilterValues class and discusses its methods.

Use the FilterValues class to create filters to display visualization data based on a context.

Related Topics

- [DashboardFilters Class](#)
This section provides an overview of the DashboardFilters class and discusses its methods.
- Search Technology: Configuring a Dashboard

FilterValues Class Methods

In this section, the FilterValues class methods are presented in alphabetical order.

DynamicTimeRangeAbsolute method: FilterValues class

Syntax

```
DynamicTimeRangeAbsolute(&startTime, &endTime)
```

Description

Use this method to dynamically change the time range to view the data on a visualization in OpenSearch Insights. Use this method to specify an absolute time range.

Parameters

Parameter	Description
<i>&startTime</i>	Specifies the start of the time range as a String value.
<i>&endTime</i>	Specifies the end of the time range as a String value.

Returns

None.

Example

```
&timeRange.DynamicTimeRangeAbsolute("2000-04-20T00:00:00.000",  
"2000-04-20T00:00:00.000");
```

Related Topics

- [DynamicTimeRangeRelative method: FilterValues class](#)

DynamicTimeRangeRelative method: FilterValues class

Syntax

```
DynamicTimeRangeRelative(&startTime, &endTime)
```

Description

Use this method to dynamically change the time range to view the data on a visualization in OpenSearch Insights. Use this method to specify relative time range, which is relative to the current time or now.

Parameters

Parameter	Description
<i>&startTime</i>	Specifies the start of the time range as a String value.
<i>&endTime</i>	Specifies the end of the time range as a String value.

Returns

None.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local array of PTSF_INSIGHTS:FilterValues &filter;
Local PTSF_INSIGHTS:FilterValues &KibCondition;

&filter = CreateArrayRept(&KibCondition, 0);
Local PTSF_INSIGHTS:FilterValues &timeRange = create
PTSF_INSIGHTS:FilterValues();
&timeRange.DynamicTimeRangeRelative("now-3y", "now");
&filter.Push(&timeRange);
```

Related Topics

- [DynamicTimeRangeAbsolute method: FilterValues class](#)

Equals method: FilterValues class

Syntax

Equals()

Description

Use the Equals method to set the equal filter of Insights dashboards.

Parameters

None.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt.Equals().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True).Value("15041");
```


Related Topics

- [NotEquals method: FilterValues class](#)
- [Key method: FilterValues class](#)

EqualsDateTime method: FilterValues class

Syntax

```
EqualsDateTime(&DtTm)
```

Description

Use the EqualsDateTime method to set the date and time filter of Insights dashboards.

Parameters

Parameter	Description
<i>&DtTm</i>	Specifies date and time (as a datetime).

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt.Key("ORCL_ES_LAST_MODIFIED_DATE", "", True).EqualsDateTime(%Datetime);
```

Related Topics

- [NotEqualsDateTime method: FilterValues class](#)

Exists method: FilterValues class

Syntax

```
Exists()
```

Description

Use the Exists method to set a filter to check for the specified key. It returns all documents that contain the specified key.

Parameters

None.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt = &filt.Exists().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True);
```

Related Topics

- [NotExists method: FilterValues class](#)
- [Key method: FilterValues class](#)

FilterValues method: FilterValues class

Syntax

```
FilterValues()
```

Description

Use the FilterValues method to create a filter.

Parameters

None.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
```

InBetweenDateTime method: FilterValues class

Syntax

```
InBetweenDateTime(&FromDtTm,&ToDtTm)
```

Description

Use the InBetweenDateTime method to set the date and time range filter of Insights dashboards.

Parameters

Parameter	Description
<i>&FromDtTm</i>	Specifies the from date and time part of a date range in the form of datetime.
<i>&ToDtTm</i>	Specifies the to date and time part of a date range in the form of datetime.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
Local datetime &FromDtTm = DateTimeValue("2000-01-01 19:20:30.000");
&filt.Key("ORCL_ES_LAST_MODIFIED_DATE", "",
True).InBetweenDateTime(&FromDtTm, %Datetime);
```

Related Topics

- [NotInBetweenDateTime method: FilterValues class](#)

InBetweenNumeric method: FilterValues class

Syntax

```
InBetweenNumeric(&StartValue,&EndValue)
```

Description

Use the InBetweenNumeric method to pass the In Between operator for numeric filter values to a dashboard.

Parameters

Parameter	Description
<i>&StartValue</i>	Specifies the beginning numeric value.
<i>&EndValue</i>	Specifies the ending numeric value.

Returns

A FilterValues object.

Example

```
Local array of PTSF_INSIGHTS:FilterValues &filterValArray;
Local PTSF_INSIGHTS:FilterValues &passFilterValues;

&passFilterValues = create PTSF_INSIGHTS:FilterValues();
```

```
&passFilterValues.Key("Fiscal Year", "", True).InBetweenNumeric(2000, 2004);  
&filterValArray.Push(&passFilterValues);
```

Key method: FilterValues class

Syntax

```
Key(&sKey,&sKeyLabel,&isRLR)
```

Description

Use the Key method to set the key or field, which is used with other methods that take the key value to filter data, such as Equals, NotEquals, and so on.

Parameters

Parameter	Description
<i>&sKey</i>	Specifies the key as a String.
<i>&sKeyLabel</i>	Specifies the label of a key as a String.
<i>&isRLR</i>	Specifies whether the value should be translated in the related language table. If you enter True, the value is translated; False, otherwise.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;  
  
Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();  
/*Create a string sArrVals with array of strings */  
&filt.Equals().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True).Values(&sArrVals);
```

Related Topics

- [Equals method: FilterValues class](#)
- [NotEquals method: FilterValues class](#)
- [Exists method: FilterValues class](#)
- [NotExists method: FilterValues class](#)

NotEquals method: FilterValues class

Syntax

```
NotEquals()
```

Description

Use the NotEquals method to filter data by checking whether a specified key does not match the specified value.

Parameters

None.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt.NotEquals().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True).Value("15041");
```

Related Topics

- [Equals method: FilterValues class](#)
- [Key method: FilterValues class](#)

NotEqualsDateTime method: FilterValues class

Syntax

```
NotEqualsDateTime(&DtTm)
```

Description

Use the NotEqualsDateTime method to set the not equal to date and time filter of Insights dashboards.

Parameters

Parameter	Description
<i>&DtTm</i>	Specifies date and time (as a Datetime).

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt.Key("ORCL_ES_LAST_MODIFIED_DATE", "",
True).NotEqualsDateTime(%Datetime);
```

Related Topics

- [EqualsDateTime method: FilterValues class](#)

NotExists method: FilterValues class

Syntax

```
NotExists()
```

Description

Use the NotExists method to determine whether the specified key does not exist.

Parameters

None.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt = &filt.NotExists().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True);
```

Related Topics

- [Exists method: FilterValues class](#)
- [Key method: FilterValues class](#)

NotInBetweenDateTime method: FilterValues class

Syntax

```
NotInBetweenDateTime(&FromDtTm,&ToDtTm)
```

Description

Use the NotInBetweenDateTime method to set the date and time filter of Insights dashboards that exclude the specified date and time range.

Parameters

Parameter	Description
<i>&FromDtTm</i>	Specifies the from date and time part of a date range in the form of datetime.
<i>&ToDtTm</i>	Specifies the to date and time part of a date range in the form of datetime.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
Local datetime &FromDtTm = DateTimeValue("2000-01-01 19:20:30.000");
&filt.Key("ORCL_ES_LAST_MODIFIED_DATE", "",
True).NotInBetweenDateTime(&FromDtTm, %Datetime);
```

Related Topics

- [InBetweenDateTime method: FilterValues class](#)

NotInBetweenNumeric method: FilterValues class

Syntax

`NotInBetweenNumeric(&StartValue,&EndValue)`

Description

Use the NotInBetweenNumeric method to pass the Not In Between operator for numeric filter values to a dashboard.

Parameters

Parameter	Description
<i>&StartValue</i>	Specifies the beginning numeric value.
<i>&EndValue</i>	Specifies the ending numeric value.

Returns

A FilterValues object.

Example

```
Local array of PTSF_INSIGHTS:FilterValues &filterValArray;
Local PTSF_INSIGHTS:FilterValues &passFilterValues;

&passFilterValues = create PTSF_INSIGHTS:FilterValues();
&passFilterValues.Key("Fiscal Year", "", True).NotInBetweenNumeric(2000,
2004);
&filterValArray.Push(&passFilterValues);
```

Value method: FilterValues class

Syntax

```
Value(&sVal)
```

Description

Use the Value method to set a single value for a filter of Insights dashboards.

Parameters

Parameter	Description
<i>&sVal</i>	Specifies the value as a String.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
&filt.Equals().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True).Value("15041");
```

Related Topics

- [Values method: FilterValues class](#)

Values method: FilterValues class

Syntax

```
Values(&sArrVals)
```

Description

Use the Values method to set multiple values for a filter of Insights dashboards.

Parameters

Parameter	Description
<i>&sArrVals</i>	Specifies the value as an array of String.

Returns

A FilterValues object.

Example

```
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:FilterValues &filt = create PTSF_INSIGHTS:FilterValues();
/*Create a string sArrVals with array of strings */
&filt.Equals().Key("INV_ITEM_ID_ORCL_ES_ENG", "", True).Values(&sArrVals);
```

Related Topics

- [Value method: FilterValues class](#)

IndexFilter Class

This section provides an overview of the IndexFilter class and discusses: IndexFilter class methods.

The IndexFilter class is part of the PTSF_AG application package. Use this class to provide SQL filter conditions for Activity Guide Search Definition indexing.

For more information about configuring the application class on the Search Definition Advanced tab, see Search Technology: Specifying Advanced Properties

IndexFilter Class Methods

In this section, the IndexFilter class methods are presented in alphabetical order.

getAGFilterSQLText method: IndexFilter Class

Syntax

```
getAGFilterSQLText(&searchdefn, &records)
```

Description

Use the getAGFilterSQLText method to return SQL condition text for Activity Guide Search Definition indexing. This method is part of the IndexFilter class in the PTSF_AG application package. To set Activity Guide SQL filtering conditions, extend PTSF_AG:IndexFilter in a custom application class and override this method to return SQL condition text for each supported Tools Activity Guide record passed in the &records array.

Parameters

Parameter	Description
<i>&searchdefn</i>	Specifies the Activity Guide Search Definition name.
<i>&records</i>	Specifies the supported Tools Activity Guide record names configured on the Search Definition Advanced tab. The Search Framework passes these record names to the method, and the implementation must return SQL condition text for each record in the same order.

Returns

Returns an array of strings containing SQL condition text.

Example

```

import PTSF_AG:IndexFilter;

class AGSqlFilter extends PTSF_AG:IndexFilter
    method getAGFilterSQLText(&searchdefn As string, &records As array of
string) Returns array of string;

end-class;

method getAGFilterSQLText
    /* &searchdefn as String, */
    /* &records as Array of String */
    /* Returns Array of String */
    /* Extends/implements PTSF_AG:IndexFilter.getAGFilterSQLText */

    Local array of string &sqltext = CreateArrayRept("", 0);

    Local string &sql;

    &sql = "PTAI_ACTIVE_FLG = 'Y' " | "AND PTAI_REQD = 'Y' " | "AND EXISTS ( "
| "    SELECT 1 " | "    FROM PS_PTAI_LIST L, PS_PTAI_ITEM M " | "    WHERE
L.PTAI_LIST_ID = M.PTAI_LIST_ID " | "    AND L.LASTUPDOPRID IN ( " | "
SELECT ROLEUSER " | "    FROM PSROLEUSER " | "    WHERE ROLENAME LIKE
'%PeopleSoft%' " | "    ) " | " )";

    Local number &i;
    For &i = 1 To &records.Len
        If &records [&i] = "PTAI_ITEM" Then
            Local string &text = "PTAI_REQD='Y'";
            &sqltext.Push(&text);
        Else
            If &records [&i] = "PTAI_LIST" Then
                &sqltext.Push(&sql);
            Else
                &sqltext.Push("PTAI_ITEM_ID <> '');");
            End-If;
        End-If;
    End-For;

    Return &sqltext;
end-method;

```

OverrideConfiguredValues Class

This section provides an overview of the OverrideConfiguredValues class and discusses: OverrideConfiguredValues class methods.

Use the OverrideConfiguredValues class to override the configured Interactive Insights dashboard values. This class supports dashboard switching for use cases that are not

dependent on page context. Applications can use this class to specify the replacement dashboard and optional filter application class for Tile View and Full View.

Use this class when you do not want to call the dashboard switch API from page Activate PeopleCode. During dashboard load, PeopleTools checks whether override values are available from the configured application class. If override values are provided, PeopleTools uses them to replace the configured dashboard values.

The GetOverriddenValues method returns an OverrideConfiguredValues object to PeopleTools when an application class provides dashboard override values.

The class includes properties for both Tile View and Full View dashboards.

Property	Description
<i>DashboardName</i>	Specifies the replacement dashboard name for Tile View.
<i>AppClassName</i>	Specifies the application class that applies filters for the Tile View dashboard.
<i>fvDashboardName</i>	Specifies the replacement dashboard name for Full View.
<i>fvAppClassName</i>	Specifies the application class that applies filters for the Full View dashboard.

Example

This example creates an OverrideConfiguredValues object and sets replacement dashboard names for Tile View and Full View.

```
import PTSF_INSIGHTS:OverrideConfiguredValues;
Local PTSF_INSIGHTS:OverrideConfiguredValues &overrideValues;
&overrideValues = create PTSF_INSIGHTS:OverrideConfiguredValues();
&overrideValues.DashboardName = "Billing Analysis Tile";
&overrideValues.AppClassName = "";
&overrideValues.fvDashboardName = "Billing Analysis";
&overrideValues.fvAppClassName = "";
```

This example defines the GetOverriddenValues() method and returns an OverrideConfiguredValues object with replacement dashboard names for Tile View and Full View.

```
import PTSF_INSIGHTS:OverrideConfiguredValues;
method GetOverriddenValues
    /* Returns PTSF_INSIGHTS:OverrideConfiguredValues */
    Local PTSF_INSIGHTS:OverrideConfiguredValues &overrideValues;
    &overrideValues = create PTSF_INSIGHTS:OverrideConfiguredValues();
    &overrideValues.DashboardName = "Billing Analysis Tile";
    &overrideValues.AppClassName = "";
    &overrideValues.fvDashboardName = "Billing Analysis";
    &overrideValues.fvAppClassName = "";
    Return &overrideValues;
end-method;
```

PTRTI Class

This section provides an overview of the PTRTI class and discusses its methods.

Search Framework enables you to index data in near real time using the real time indexing process. In the real time indexing process, the preprocessing and post processing of a search definition is achieved through a delivered application class- PTRTIPKG:PTRTI.

Related Topics

- Search Technology: Configuring Real-Time Indexing

PTRTI Class Methods

In this section, the PTRTI class methods are presented in alphabetical order.

PostProcess method: PTRTI class

Syntax

```
PostProcess(&triggerrec, &searchdefn, &keys, &keyvalueset)
```

Description

Use this method to perform post processing activities of a search definition for real-time indexing.

This method is not applicable for Activity Guide type search definitions.

Parameters

Parameter	Description
<i>&triggerrec</i>	Specifies the name of the trigger record as a String.
<i>&searchdefn</i>	Specifies the name of the search definition as a String.
<i>&keys</i>	Specifies the key names as in a staging row as an array of String.
<i>&keyvalueset</i>	Specifies the key values of the keys as in a staging row as an array of array of String.

Returns

A number; 0 indicates success and 1 indicates failure.

① Note

However, the real time indexing process does not use the return value of the PostProcess method for any processing.

Example

```
import PTRTIKPG:PTRTI;

class RTI extends PTRTIKPG:PTRTI
  method PostProcess(&triggerrec As string, &searchdefn As string, &keys As
array of string, &keyvalueset As array of array of string) Returns number;
end-class;

method PostProcess
  /* &triggerrec as String, +/
  /* &searchdefn as String, +/
  /* &keys as Array of String, +/
  /* &keyvalueset as Array2 of String +/
  /* Returns Number +/
  /* Extends/implements PTRTIKPG:PTRTI.PostProcess +/
  Local number &result;
  &result = 0;
  /* Perform some processing */
  Return &result;
end-method;
```

Related Topics

- [Process method: PTRTI class](#)

Process method: PTRTI class

Syntax

`Process(&triggerrec, &searchdefn, &keys, &keyvalueset)`

Description

Use the Process method to perform the following activities:

- Preprocessing: Performs the preprocessing task that was performed by an Application Engine program in a search definition.
- Defer processing of current entries.
- Discard processing of current entries.

Parameters

Parameter	Description
<i>&triggerrec</i>	Specifies the name of the trigger record as a String. For Activity Guide type search definitions, the value of the <i>&triggerrec</i> parameter is always <i>PTAI_ITEM</i> .
<i>&searchdefn</i>	Specifies the name of the search definition as a String.

Parameter	Description
<i>&keys</i>	Specifies the key names as in a staging row as an array of String.
<i>&keyvalueset</i>	Specifies the key values of the keys as in a staging row as an array of array of String.

Returns

An array of number with exactly one of the following values.

Value	Description
0	Defers the entry.
1	Processes the entry.
-1	Discards the entry.

If the method returns an array of numbers consisting of only *one* array element, the same value is applied to all the entries.

For example, if the keyvalueset has five rows and the return value is 1 (processes the entry), the return value 1 is applied to all the five rows, that is, processing the five rows.

Example

```
import PTRTIKPG:PTRTI;

class RTI extends PTRTIKPG:PTRTI
    method Process(&triggerrec As string, &searchdefn As string, &keys As
array of string, &keyvalueset As array of array of string) Returns array of
number;
end-class;

method Process
    /* &triggerrec as String, +/
    /* &searchdefn as String, +/
    /* &keys as Array of String, +/
    /* &keyvalueset as Array2 of String +/
    /* Returns Array of Number +/
    /* Extends/implements PTRTIKPG:PTRTI.Process +/
    Local array of number &areult;
    &areult = CreateArrayRept(0, 1);
    &areult.Push(1);
    /* Perform some processing */
    Return &areult;
end-method;
```

Related Topics

- [PostProcess method: PTRTI class](#)

SearchAttribute Class

This section provides an overview of the SearchAttribute class and discusses:

- SearchAttribute class methods.
- SearchAttribute class properties.

The SearchAttribute class represents a search attribute, which is an alias to a search query field. Search attributes enable you to hide the attribute name and query field name from the end user, who will see the search attribute display name.

An array of search attributes are returned using the GetAllAttributes, GetConfiguredFilterAttributes, GetNonConfiguredFilterAttributes, and GetRequestedAttributes methods of the SearchCategory class.

Related Topics

- [GetAllAttributes method: SearchCategory class](#)
- [GetConfiguredFilterAttributes method: SearchCategory class](#)
- [GetNonConfiguredFilterAttributes method: SearchCategory class](#)
- [GetRequestedAttributes method: SearchCategory class](#)

SearchAttribute Class Methods

In this section, the SearchAttribute class methods are presented in alphabetical order.

SearchAttribute method: SearchAttribute class

Syntax

```
SearchAttribute(Name, Type)
```

Description

Use this constructor to instantiate a SearchAttribute object for a specific attribute.

Parameters

Parameter	Description
<i>Name</i>	Specifies the name of the attribute as a string .
<i>Type</i>	Specifies the type for this attribute as a one-character string. The values for <i>Type</i> can be as follows: • D – Date • N – Number • S – String

Returns

A SearchAttribute object.

SearchAttribute Class Properties

In this section, the SearchAttribute class properties are presented in alphabetical order.

Display property: SearchAttribute class

Description

Use this property to set or return a string to be used as the display name for this attribute within the user interface.

This property is read/write.

Name property: SearchAttribute class

Description

Use this property to set or return a string representing the name of this search attribute.

This property is read/write.

Type property: SearchAttribute class

Description

Use this property to set or return a one-character sting indicating the type for this attribute. The values for this property can be as follows:

- D – Date
- N – Number
- S – String

This property is read/write.

SearchbarContext Class

This section provides an overview of the SearchbarContext class and discusses its methods.

PeopleTools enables you to embed the search tool on an application page. To embed the search tool, you should add the New Search UI subpage to the component page, and call the SearchbarContext() method from the page activate event.

Related Topics

- Fluid User Interface Developer's Guide: Embedding the Suggestions Search Box
- Search Technology: Working with Suggestions Search

SearchbarContext Class Methods

In this section, the SearchbarContext class methods are presented in alphabetical order.

Related Topics

- [SearchbarContext Class Properties](#)
In this section, the SearchbarContext class properties are presented in alphabetical order.

SearchbarContext method: SearchbarContext class

Syntax

```
SearchbarContext()
```

Description

Use the SearchbarContext method to customize a search bar and specify which search index to use.

Returns

None.

Example

```
import PTSF_SEARCHUI:SearchbarContext;

&sc = create PTSF_SEARCHUI:SearchbarContext();

&sc.Placeholder = "custom placeholder text";
&sc.CustomSearchCategory = "PTPORTALREGISTRY"; /* default search category */
&sc.IsIncludeHiddenCref = True; /* only valid for PTPORTALREGISTRY search
category */
&sc.IsComponentOrGenericURL = True; /* only valid for PTPORTALREGISTRY search
category */
&sc.ShowGridIcons = False;
&sc.ShowCategoryDropDown = False;
&sc.ShowGlobalSearchButton = False;

&sc.SetSearchbarContext();
```

SearchbarContext Class Properties

In this section, the SearchbarContext class properties are presented in alphabetical order.

ArrCustomSearchCategory property: SearchbarContext class

Description

Use this property to specify an array of search categories. You can use this property only on a fluid page search widget.

This property is read/write.

CustomSearchCategory property: SearchbarContext class

Description

Use this property to specify the default search category as a String value.

This property is read/write.

IsComponentOrGenericURL property: SearchbarContext class

Description

Use this property to determine whether to show or hide PeopleSoft components or generic content references as a Boolean value.

This property is valid only for the PTPORTALREGISTRY search category.

This property is read/write.

IsIncludeHiddenCref property: SearchbarContext class

Description

Use this property to determine whether to show or hide hidden content references as a Boolean value.

This property is valid only for the PTPORTALREGISTRY search category.

This property is read/write.

Placeholder property: SearchbarContext class

Description

Use this property to specify the default placeholder text in the keyword field as a String value.

This property is read/write.

ShowCategoryDropDown property: SearchbarContext class

Description

Use this property to determine whether to show or hide the category drop-down list as a Boolean value.

The default value is True, that is, the page displays the category drop-down list.

This property is read/write.

ShowGlobalSearchButton property: SearchbarContext class

Description

Use this property to determine whether to show or hide the global search button in the search bar as a Boolean value.

The default value is True, that is, the page displays the global search button.

This property is read/write.

ShowGridIcons property: SearchbarContext class

Description

Use this property to determine whether to show or hide the grid icons that differentiate between items that are recently accessed and items that are suggestions.

The default value is True, that is, the grid icons are displayed.

This property is read/write.

SearchCategory Class

This section provides an overview of the SearchCategory class and discusses:

- SearchCategory class methods.
- SearchCategory class properties.

SearchCategory is the PeopleCode representation of a search category definition, which groups search data source definitions. A search category is a searchable collection of indexes. SearchCategory objects can only be constructed by giving the name of a search category definition that has already been saved to the database. In general SearchCategory objects are instantiated either to be assigned to the Categories property of a SearchQuery object or to be passed to methods of the SearchAdminService.

SearchCategory Class Methods

In this section, the SearchCategory class methods are presented in alphabetical order.

GetAllAttributes method: SearchCategory class

Syntax

```
GetAllAttributes()
```

Description

Use this method to return the union of all the attributes available across all the search definitions assigned to this search category.

Parameters

None.

Returns

An array of SearchAttribute objects.

Related Topics

- [SearchAttribute Class](#)

This section provides an overview of the SearchAttribute class and discusses:

GetConfiguredFilterAttributes method: SearchCategory class

Syntax

```
GetConfiguredFilterAttributes()
```

Description

Use this method to return a list of advanced search filter attributes defined *and* configured for the advanced search for this search category. These are the attributes that have been configured on the Advanced Search Fields page.

Parameters

None.

Returns

An array of SearchAttribute objects.

Related Topics

- [SearchAttribute Class](#)
This section provides an overview of the SearchAttribute class and discusses:

GetFacetFilters method: SearchCategory class

Syntax

```
GetFacetFilters()
```

Description

Use this method to return an array of facet filters for a specific search category. Dynamically building this array based on system metadata avoids the hard-coding of facet names in your PeopleCode programs. However, this means that this method can only be used for search categories defined on the local system (therefore, it cannot be used for universal search).

Parameters

None.

Returns

An array of FacetFilter objects.

Related Topics

- [FacetFilter Class](#)
This section provides an overview of the FacetFilter class and discusses:

GetLastIndexedDateTime method: SearchCategory class

Syntax

```
GetLastIndexedDateTime()
```

Description

Use this method to return a `DateTime` value representing the oldest index that is current from all the indexed search definitions in this category. If no search definition in this category has ever been indexed, this method returns `Null`.

Parameters

None.

Returns

A `DateTime` value.

GetNonConfiguredFilterAttributes method: SearchCategory class

Syntax

```
GetNonConfiguredFilterAttributes()
```

Description

Use this method to return a list of advanced search filter attributes defined *but not* configured for the advanced search for this search category. These are the attributes that have been defined for the search category but not configured on the Advanced Search Fields page.

Parameters

None.

Returns

An array of `SearchAttribute` objects.

Related Topics

- [SearchAttribute Class](#)
This section provides an overview of the `SearchAttribute` class and discusses:

GetRequestedAttributes method: SearchCategory class

Syntax

```
GetRequestedAttributes()
```

Description

Use this method to return the list of search attributes that have been configured as display-only attributes on the Display Fields page. Since this method returns the display label for these search attributes, you must also use the `GetRequestedFields` method to return the list of search fields to pass to the query API.

Parameters

None.

Returns

An array of `SearchAttribute` objects.

Related Topics

- [SearchAttribute Class](#)
This section provides an overview of the `SearchAttribute` class and discusses:
- [GetRequestedFields method: SearchCategory class](#)

GetRequestedFields method: SearchCategory class

Syntax

```
GetRequestedFields()
```

Description

Use this method to return the list of search fields that have been configured as display-only attributes on the Display Fields page. This array can then be passed to the `RequestedFields` method of the `SearchQuery` class. Since this method returns the query field names for the search attributes, you must also use the `GetRequestedAttributes` method to return the display labels to display in the user interface.

Parameters

None.

Returns

An array of `SearchField` objects.

Example

```
PT_SEARCH:SearchCategory &cat = create  
PT_SEARCH:SearchCategory("MY_SRCH_CAT");  
&qry.Categories = CreateArray(&cat);  
  
&qry.RequestedFields = &cat.GetRequestedFields();
```

Related Topics

- [GetRequestedAttributes method: SearchCategory class](#)

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .
- [RequestedFields property: SearchQuery class](#)

SearchCategory method: SearchCategory class

Syntax

SearchCategory(*Name*)

Description

Use this constructor to instantiate a SearchCategory object populated with the data from the specified saved definition.

Parameters

Parameter	Description
<i>Name</i>	The name of the search category to instantiate as a string.

Returns

A SearchCategory object.

Example

```
import PT_SEARCH:SearchCategory;  
  
Local PT_SEARCH:SearchCategory &SrchCat = create PT_SEARCH:SearchCategory⇒  
("MySrchCat");
```

Related Topics

- [Categories property: SearchQuery class](#)
- [Constructors](#)
The constructor for a class is the public method with the same name as the (short name of the) class. The statements contained in this method (if any) provide the initialization of the class.
- [Import Declarations](#)
Before you can use a class name in a PeopleCode program (either a class definition program or an ordinary PeopleCode program), you must first import it using an import statement at the beginning of your program.

SearchCategory Class Properties

In this section, the SearchCategory class properties are presented in alphabetical order.

DataSourceNames property: SearchCategory class

Description

Use this property to return an array of string containing the names of the search definitions that have been assigned to this search category.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner.

Displayname property: SearchCategory class

Description

Use this property to return the long description (display) for the search category as a string.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner.

Duplicates property: SearchCategory class

Description

Use this property to return a string indicating whether duplicates have been set for this search category.

This property is effectively read-only.

Related Topics

- Search Technology: Specifying General Search Category Settings

IsDeployed property: SearchCategory class

Description

Use this property to return a Boolean value indicating whether this search category has been deployed to a search provider.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner.

Name property: SearchCategory class

Description

Use this property to return the name of this SearchCategory object as a string.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner.

ServiceName property: SearchCategory class

Description

Use this property to return a string representing the name of the search engine instance to which this search category has been deployed.

This property is effectively read-only.

Note

While this property is actually read/write, from PeopleCode, it is meant to be used in a read-only manner.

SearchConfiguration Class

This section provides an overview of the SearchConfiguration class and discusses its methods.

The SearchConfiguration class is used to retrieve search configuration properties of a content reference when the content reference is configured on the Manage Configurable Search page.

Related Topics

- Search Technology: Working with Configurable Search

SearchConfiguration Class Methods

In this section, the SearchConfiguration class methods are presented in alphabetical order.

CollapseSearchCriteriaAfterSrch method: SearchConfiguration class

Syntax

```
CollapseSearchCriteriaAfterSrch()
```

Description

Use the CollapseSearchCriteriaAfterSrch method to retrieve the Boolean value, which indicates whether to collapse search criteria or not after displaying the search results.

Parameters

None.

Returns

A Boolean value.

Example

```
&criteriaObj.CollapseSearchCriteriaAfterSrch();
```

GetConfigSrchId method: SearchConfiguration class

Syntax

```
GetConfigSrchId()
```

Description

Use the GetConfigSrchId method to retrieve the configured search ID. The search ID is auto assigned in the PTS_SRCH_ASGN table.

The search ID is in this format: <PortalName>_<PortalObjName>.

Parameters

None.

Returns

A string value containing the search ID.

Example

```
&criteriaObj.GetConfigSrchId();
```

GetConfiguredImageRecord method: SearchConfiguration class

Syntax

```
GetConfiguredImageRecord()
```

Description

Use the GetConfiguredImageRecord method to retrieve the image record.

Parameters

None.

Returns

A string value containing the image record.

Example

```
&criteriaObj.GetConfiguredImageRecord();
```

Related Topics

- [GetConfiguredImageRecordField method: SearchConfiguration class](#)

GetConfiguredImageRecordField method: SearchConfiguration class

Syntax

```
GetConfiguredImageRecordField()
```

Description

Use the GetConfiguredImageRecordField to retrieve the field for an image.

Parameters

None.

Returns

A string value containing the corresponding field for the image.

Example

```
&criteriaObj.GetConfiguredImageRecordField();
```

Related Topics

- [GetConfiguredImageRecord method: SearchConfiguration class](#)

GetConfiguredSearchType method: SearchConfiguration class

Syntax

```
GetConfiguredSearchType()
```

Description

Use the GetConfiguredSearchType method to retrieve the configured search type (standard or keyword).

Parameters

None.

Returns

A string value containing the search type.

Example

```
&criteriaObj.GetConfiguredSearchType();
```

GetCriteriaFields method: SearchConfiguration class

Syntax

```
GetCriteriaFields(&display_option)
```

Description

Use the GetCriteriaFields method to retrieve the criteria fields selected for the search page (basic and advanced mode).

Parameters

Parameter	Description
<i>&display_option</i>	Specifies the search presentation mode. Valid values are: "A" - represents advanced mode. "B" - represents basic mode.

Returns

An array of PTS_CFGSRCH_CRITERIA:SearchField.

Example

The following code samples describe the use of the GetCriteriaFields method for basic and advanced modes.

```

/*Basic mode*/
import PTS_CFGSRCH_CRITERIA:SearchField;

Local array of PTS_CFGSRCH_CRITERIA:SearchField &CriteriaFieldsList =
&criteriaObj.GetCriteriaFields("B");

If &CriteriaFieldsList <> Null Then
    For &i = 1 To &CriteriaFieldsList.Len
        &sField = &CriteriaFieldsList [&i];
        MessageBox(0, "", 0, 0, &sField.FieldName | "," | &sField.FieldLable |
", " | &sField.FieldOrder | "," | &sField.RequiredFlag);
    End-For;
End-If;
/* Advanced mode */
import PTS_CFGSRCH_CRITERIA:SearchField;

Local array of PTS_CFGSRCH_CRITERIA:SearchField &CriteriaFieldsList =
&criteriaObj.GetCriteriaFields("A");

If &CriteriaFieldsList <> Null Then
    For &i = 1 To &CriteriaFieldsList.Len
        &sField = &CriteriaFieldsList [&i];
        MessageBox(0, "", 0, 0, &sField.FieldName | "," | &sField.FieldLable |
", " | &sField.FieldOrder | "," | &sField.RequiredFlag);
    End-For;
End-If;

```

GetDefaultSrchLookup method: SearchConfiguration class

Syntax

GetDefaultSrchLookup()

Description

Use the GetDefaultSrchLookup method to retrieve the default search lookup type (basic or advanced) specified for a content reference.

Parameters

None.

Returns

A string value containing the default search lookup type.

Example

```
&criteriaObj.GetDefaultSrchLookup();
```

GetDefaultSrchLookupForSFF method: SearchConfiguration class

Syntax

```
GetDefaultSrchLookupForSFF()
```

Description

Use the GetDefaultSrchLookupForSFF method to retrieve the default search lookup type (basic or advanced) specified for a content reference in small form factor devices.

Parameters

None.

Returns

A string value containing the default search lookup type.

Example

```
&criteriaObj.GetDefaultSrchLookupForSFF();
```

GetESCriteriaFields method: SearchConfiguration class

Syntax

```
GetESCriteriaFields()
```

Description

Use the GetESCriteriaFields method to retrieve the criteria fields selected for the keyword search page (advanced mode).

Parameters

None.

Returns

An array of PTS_CFGSRCH_CRITERIA:SearchField.

Example

```
&criteriaObj.GetESCriteriaFields();
```

GetMaxSrchResults method: SearchConfiguration class

Syntax

```
GetMaxSrchResults()
```

Description

Use the GetMaxSrchResults method to retrieve the maximum search results specified for a content reference.

Parameters

None.

Returns

An Integer value indicating the maximum search results.

Example

```
&criteriaObj.GetMaxSrchResults();
```

GetPageLinksList method: SearchConfiguration class

Syntax

```
GetPageLinksList()
```

Description

Use the GetPageLinksList method to retrieve the page links specified on the search page.

Parameters

None.

Returns

An array of PTS_CFGSRCH_CRITERIA:PageLink.

Example

```
&criteriaObj.GetPageLinksList();
```

GetRecentSearchesCount method: SearchConfiguration class

Syntax

```
GetRecentSearchesCount()
```

Description

Use the GetRecentSearchesCount method to retrieve the number of recent searches stored in the system.

Parameters

None.

Returns

An Integer value.

Example

```
&criteriaObj.GetRecentSearchesCount();
```

GetRecentSearchesNamingFormat method: SearchConfiguration class

Syntax

```
GetRecentSearchesNamingFormat()
```

Description

Use the GetRecentSearchesNamingFormat method to retrieve the naming format used for recent searches.

Parameters

None.

Returns

A string value containing the naming format for recent searches.

Example

```
&criteriaObj.GetRecentSearchesNamingFormat();
```

GetResultFields method: SearchConfiguration class

Syntax

```
GetResultFields()
```

Description

Use the GetResultFields method to retrieve the fields selected to display on the search results page.

Parameters

None.

Returns

An array of PTS_CFGSRCH_CRITERIA:ResultField.

Example

```
&criteriaObj.GetResultFields();
```


GetSavedSearchesCount method: SearchConfiguration class

Syntax

```
GetSavedSearchesCount()
```

Description

Use the GetSavedSearchesCount method to retrieve the number of searches saved for a content reference.

Parameters

None.

Returns

An Integer value indicating the count of saved searches.

Example

```
&criteriaObj.GetSavedSearchesCount();
```

GetSavedSearchesNamingFormat method: SearchConfiguration class

Syntax

```
GetSavedSearchesNamingFormat()
```

Description

Use the GetSavedSearchesNamingFormat method to retrieve the naming format used for saved searches.

Parameters

None.

Returns

A string value containing the naming format for saved searches.

Example

```
&criteriaObj.GetSavedSearchesNamingFormat();
```

GetSearchCriteriaDisplayPattern method: SearchConfiguration class

Syntax

```
GetSearchCriteriaDisplayPattern()
```

Description

Use the `GetSearchCriteriaDisplayPattern` method to retrieve the display pattern of search criteria.

Parameters

None.

Returns

A string value containing the display pattern.

Example

```
&criteriaObj.GetSearchCriteriaDisplayPattern();
```

GetSearchDefinition method: SearchConfiguration class

Syntax

```
GetSearchDefinition()
```

Description

Use the `GetSearchDefinition` method to retrieve the search definition specified for keyword search for a content reference.

Parameters

None.

Returns

A string value containing the search definition specified for keyword search.

Example

```
&criteriaObj.GetSearchDefinition();
```

GetSearchPageInstructionsInfo method: SearchConfiguration class

Syntax

```
GetSearchPageInstructionsInfo()
```

Description

Use the `GetSearchPageInstructionsInfo` method to retrieve instructions to display on the search page.

Parameters

None.

Returns

A string value containing instructions to display on the search page.

Example

```
&criteriaObj.GetSearchPageInstructionsInfo();
```

GetSearchPageTitleInfo method: SearchConfiguration class

Syntax

```
GetSearchPageTitleInfo()
```

Description

Use the GetSearchPageTitleInfo method to retrieve the specified title for a search page.

Parameters

None.

Returns

A string value containing the search page title.

Example

```
&criteriaObj.GetSearchPageTitleInfo();
```

GetSearchRecord method: SearchConfiguration class

Syntax

```
GetSearchRecord()
```

Description

Use the GetSearchRecord method to retrieve the search record specified for standard search on a content reference.

Parameters

None.

Returns

A string value containing the search record for a content reference.

Example

```
&criteriaObj.GetSearchRecord();
```

GetSrchLookupType method: SearchConfiguration class

Syntax

```
GetSrchLookupType()
```

Description

Use the GetSrchLookupType method to retrieve the search lookup type (basic or advanced) specified for a content reference.

Parameters

None.

Returns

A string value containing the specified search lookup type.

Example

```
&criteriaObj.GetSrchLookupType();
```

IsAutoSearchEnabled method: SearchConfiguration class

Syntax

```
IsAutoSearchEnabled()
```

Description

Use the IsAutoSearchEnabled method to determine whether auto search is enabled for the content reference.

Parameters

None.

Returns

A Boolean value.

Example

```
&criteriaObj.IsAutoSearchEnabled();
```

IsSearchPrimaryAction method: SearchConfiguration class

Syntax

```
IsSearchPrimaryAction()
```

Description

Use the `IsSearchPrimaryAction` method to determine whether search is set as the primary action for the content reference.

Parameters

None.

Returns

A Boolean value.

Example

```
&criteriaObj.IsSearchPrimaryAction();
```

SearchConfiguration method: SearchConfiguration class

Syntax

```
SearchConfiguration()
```

Description

Use the `SearchConfiguration` method to instantiate an object of the `SearchConfiguration` class.

Parameters

None.

Returns

None.

Example

```
Local PTS_CFGSRCH_CRITERIA:SearchConfiguration &criteriaObj = create  
PTS_CFGSRCH_CRITERIA:SearchConfiguration();
```

ShowRelatedActions method: SearchConfiguration class

Syntax

```
ShowRelatedActions()
```

Description

Use the `ShowRelatedActions` method to determine whether to show related actions on the search results page.

Parameters

None.

Returns

A Boolean value.

Example

```
&criteriaObj.ShowRelatedActions();
```

SearchFactory Class

This section provides an overview of the SearchFactory class and discusses:

- SearchFactory class methods.
- SearchFactory class properties.

The SearchFactory class is a concrete factory class used to instantiate search engine-specific implementations of the SearchQueryService and other services.

SearchFactory Class Methods

In this section, the SearchFactory class methods are presented in alphabetical order.

CreateQueryService method: SearchFactory class

Syntax

```
CreateQueryService(name)
```

Description

Use this method to instantiate a search engine-specific SearchQueryService object. This search engine-specific search query service enables accessing search engine-specific attributes of a SearchQuery object

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the search query service as a string.

Returns

A SearchQueryService object.

Example

```
import PT_SEARCH:SearchFactory;
import PT_SEARCH:SearchQueryService;

Local PT_SEARCH:SearchFactory &MySearchFactory = create
PT_SEARCH:SearchFactory();
```

```
Local PT_SEARCH:SearchQueryService &MySrchQrySvc = &MySearchFactory.⇒  
CreateQueryService("default");
```

Related Topics

- [SearchQueryService Class](#)
This section provides an overview of the SearchQueryService class and discusses: SearchQueryService class methods.

SearchFactory method: SearchFactory class

Syntax

```
SearchFactory()
```

Description

Use this constructor to instantiate a SearchFactory object, which allows you to instantiate a search-provider specific search query service.

Parameters

None.

Returns

A SearchFactory object.

Example

```
import PT_SEARCH:SearchFactory;  
  
Local PT_SEARCH:SearchFactory &MySearchFactory = create  
PT_SEARCH:SearchFactory();
```

SearchFactory Class Properties

In this section, the SearchFactory class properties are presented in alphabetical order.

DEFAULTSERVICE property: SearchFactory class

Description

This property returns the name of the default search engine service as a string.

This property is read-only.

SearchField Class

This section provides an overview of the SearchField class and discusses: .

- SearchField class methods.
- SearchField class properties.

The SearchField class is a superclass that requires implementation of a search engine-specific subclass. A SearchField is returned by the First, Item, ItemByName, and Next methods of the SearchFieldCollection class.

Related Topics

- [SearchFieldCollection Class](#)
This section provides an overview of the SearchFieldCollection class and discusses: SearchFieldCollection class methods.

SearchField Class Methods

In this section, the SearchField class methods are presented in alphabetical order.

getAsDate method: SearchField class

Syntax

```
getAsDate()
```

Description

Use this method to return the Value property as a Date value.

Note

This is an abstract method.

Parameters

None.

Returns

A Date value.

Related Topics

- [Value property: SearchField class](#)

getAsDateTime method: SearchField class

Syntax

```
getAsDateTime()
```

Description

Use this method to return the Value property as a DateTime value.

Note

This is an abstract method.

Parameters

None.

Returns

A DateTime value.

Related Topics

- [Value property: SearchField class](#)

getAsInteger method: SearchField class

Syntax

```
getAsInteger()
```

Description

Use this method to return the Value property as a Integer value.

Note

This is an abstract method.

Parameters

None.

Returns

An Integer value.

Related Topics

- [Value property: SearchField class](#)

getAsNumber method: SearchField class

Syntax

```
getAsNumber()
```

Description

Use this method to return the Value property as a Number value.

Note

This is an abstract method.

Parameters

None.

Returns

A Number value.

Related Topics

- [Value property: SearchField class](#)

SearchField Class Properties

In this section, the SearchField class properties are presented in alphabetical order.

Name property: SearchField class

Description

This property returns the name of the search field as a string.

This property is read-only.

Related Topics

- [ItemByName method: SearchFieldCollection collection](#)

Type property: SearchField class

Description

This property returns the data type of the search field as a one-character string as follows:

- D – Date
- N – Number
- S – String

This property is read-only.

Value property: SearchField class

Description

This property returns the value of the search field as a string. The Value property can be transformed from a String value to a Date, DateTime, Integer, or Number value using the methods of the SearchField class.

This property is read-only.

Related Topics

- [getAsDate method: SearchField class](#)
- [getAsDateTime method: SearchField class](#)
- [getAsInteger method: SearchField class](#)
- [getAsNumber method: SearchField class](#)

SearchFieldCollection Class

This section provides an overview of the SearchFieldCollection class and discusses: SearchFieldCollection class methods.

The SearchFieldCollection class provides a collection of SearchField objects. Because the SearchFieldCollection class is a generic interface class, a search engine-specific subclass is required. A SearchFieldCollection is returned by the GetCustomAttributes method of the SearchResult class.

Related Topics

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .
- [GetCustomAttributes method: SearchResult class](#)

SearchFieldCollection Class Methods

In this section, the SearchFieldCollection class methods are presented in alphabetical order.

Count method: SearchFieldCollection collection

Syntax

```
Count ( )
```

Description

Use this method to return the number of SearchField objects in the SearchField collection as an integer.

Parameters

None.

Returns

An integer.

First method: SearchFieldCollection collection

Syntax

```
First ( )
```

Description

Use this method to return the first SearchField object in the SearchField collection. If the SearchField collection is empty, this method returns Null.

Parameters

None.

Returns

A SearchField object if successful, Null otherwise.

Related Topics

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .

Item method: SearchFieldCollection collection

Syntax

Item(*index*)

Description

Use this method to return the SearchField object at the position in the SearchField collection specified by the *index* parameter.

Parameters

Parameter	Description
<i>index</i>	Specifies the position of the SearchField object in the SearchField collection as an integer.

Returns

A SearchField object if successful, Null otherwise.

Related Topics

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .

ItemByName method: SearchFieldCollection collection

Syntax

ItemByName(*name*)

Description

Use this method to return the SearchField object specified by the *name* parameter.

Note

The ItemByName method does not set the index for the SearchField object returned. Therefore, the Next method cannot be used after a call to ItemByName.

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the SearchField object as a string.

Returns

A SearchField object if successful, Null otherwise.

Related Topics

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .

Next method: SearchFieldCollection collection

Syntax

Next()

Description

Use this method to return the next SearchField object in the SearchField collection. This method can only be invoked after a successful invocation of the First, Item, or Next methods.

Note

The ItemByName method does not set the index for the SearchField object returned. Therefore, the Next method cannot be used after a call to ItemByName.

Parameters

None.

Returns

A SearchField object if successful, Null otherwise.

Related Topics

- [First method: SearchFieldCollection collection](#)
- [Item method: SearchFieldCollection collection](#)
- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .

SearchFilter Class

This section provides an overview of the SearchFilter class and discusses:

- SearchFilter class properties.
- SearchFilter class methods.

The SearchFilter class creates a filter for search results (similar to building a WHERE clause in a SQL statement) that is passed to the SearchQuery class.

SearchFilter Class Methods

In this section, the SearchFilter class methods are presented in alphabetical order.

setDateFilter method: SearchFilter class

Syntax

```
setDateFilter(date)
```

Description

Use this method to set a Date value as the search filter.

Parameters

Parameter	Description
<i>date</i>	Specifies the search filter value as a Date value.

Returns

None.

Example

```
import PT_SEARCH:SearchFilter;

Local PT_SEARCH:SearchFilter &Srchfilter;
Local date &Date = DateValue("10/09/11");

&Srchfilter.setDateFilter(&Date);
```

Related Topics

- [Value property: SearchFilter class](#)
- [FormatDateFilter method: SearchQuery class](#)

setDateTimeFilter method: SearchFilter class

Syntax

```
setDateTimeFilter(datetime)
```

Description

Use this method to set a DateTime value as the search filter.

Parameters

Parameter	Description
<i>datetime</i>	Specifies the search filter value as a DateTime value.

Returns

None.

Example

```
import PT_SEARCH:SearchFilter;

Local PT_SEARCH:SearchFilter &Srchfilter;
Local datetime &Date_TIME = DateTimeValue("10/13/97 10:34:25 PM");

&Srchfilter.setDateTimeFilter(&Date_TIME);
```

Related Topics

- [Value property: SearchFilter class](#)
- [FormatDateTimeFilter method: SearchQuery class](#)

setFilterArray method: SearchFilter class

Syntax

```
setFilterArray(&arrFilters, &GroupBoxID)
```

Description

Use this method to apply page-level context filters to an Interactive Insights dashboard. The method refreshes the dashboard in the specified group box and replaces the existing dashboard filters with the supplied filters.

Parameters

Parameter	Description
<i>&arrFilters</i>	Specifies an array of PTSF_INSIGHTS:FilterValues objects to apply to the dashboard.
<i>&GroupBoxID</i>	Specifies the group box ID that contains the Interactive Insights dashboard.

Returns

None.

Example

```
import PTSF_INSIGHTS:ConsolidateFilters;
import PTSF_INSIGHTS:FilterValues;

Local PTSF_INSIGHTS:ConsolidateFilters &oConsolidateFilters;
Local array of PTSF_INSIGHTS:FilterValues &arrFilters;
Local PTSF_INSIGHTS:FilterValues &oFilter;
Local string &GroupBoxID;

&oConsolidateFilters = create PTSF_INSIGHTS:ConsolidateFilters();
&arrFilters = CreateArrayRept(create PTSF_INSIGHTS:FilterValues(), 0);

/* Build the filter values using the same logic used for the initial
dashboard load. */
&oFilter = create PTSF_INSIGHTS:FilterValues();

/* Set filter values as required by the dashboard filter definition. */
/* Example only: use the appropriate FilterValues methods for your filter. */
/* &oFilter.<method_name>(<filter_parameters>); */

&arrFilters.Push(&oFilter);

&GroupBoxID = "MY_DASHBOARD_GB";

&oConsolidateFilters.setFilterArray(&arrFilters, &GroupBoxID);
```

SearchFilter Class Properties

In this section, the SearchFilter class properties are presented in alphabetical order.

Field property: SearchFilter class

Description

Use this property to set or return a SearchField object.

This property is read/write.

Related Topics

- [SearchField Class](#)
This section provides an overview of the SearchField class and discusses: .

FilterConnector property: SearchFilter class

Description

Use this property to return the filter connector (& or |) that is in effect when this search filter is a composite search filter. This property is set by the SearchFilterGenerator class.

This property is effectively read-only.

Related Topics

- [Filters property: SearchFilter class](#)
- [SearchFilterGenerator Class](#)
This section provides an overview of the SearchFilterGenerator class and discusses SearchFilterGenerator class methods.

Filters property: SearchFilter class

Description

Use this property to return an array of SearchFilter objects that define this search filter as a composite search filter. This property is set by the SearchFilterGenerator class

This property is effectively read-only.

Related Topics

- [FilterConnector property: SearchFilter class](#)
- [SearchFilterGenerator Class](#)
This section provides an overview of the SearchFilterGenerator class and discusses SearchFilterGenerator class methods.

Operator property: SearchFilter class

Description

Use this property to set or return the operator for the filter as a string. Depending on the type of the search attribute, the following operators can be used:

Operator	String	Number	Date
equals	X	X	X
notequals*	X	X	X
contains	X		
greaterthan		X	X
greaterthanequals		X	X
lessthan		X	X
lessthanequals		X	X

* The notequals operator can be used when EnableExtendedFilterOperators property is set to true.

This property is read/write.

Related Topics

- [Type property: SearchAttribute class](#)
- [EnableExtendedFilterOperators property: SearchQuery class](#)

Value property: SearchFilter class

Description

Use this property to set or return the value for the filter as a string.

This property is read/write.

Use this property only when setting a string or a number (represented as a string) as a filter. If you wish to set a Date or a DateTime value as a filter, use the setDateFilter and setDateTimeFilter methods, respectively

Related Topics

- [setDateFilter method: SearchFilter class](#)
 - [SearchFilter Class Methods](#)
- In this section, the SearchFilter class methods are presented in alphabetical order.

SearchFilterGenerator Class

This section provides an overview of the SearchFilterGenerator class and discusses SearchFilterGenerator class methods.

The SearchFilterGenerator class is used to create composite search filters from different data types and operators. The SearchFilterGenerator class provides the flexibility to create a composite search filter by associating different filters using connectors such as & and |.

Note

The & is the default connector; therefore, for composite filters, MatchAll is implied and does not have to be explicitly specified.

Related Topics

- [Search Filter Generator Examples](#)
This section provides additional code examples for generating search filters using the SearchFilterGenerator class:
- [SearchFilter Class](#)
This section provides an overview of the SearchFilter class and discusses:

Related SearchFilterGenerator Methods

Search filter methods can be categorized as follows:

- Text and string filters:
 - [ContainsKeywords method: SearchFilterGenerator class](#)
 - [ContainsPartialWord method: SearchFilterGenerator class](#)
 - [ContainsPhrase method: SearchFilterGenerator class](#)
 - [ContainsWord method: SearchFilterGenerator class](#)
 - [EqualsString method: SearchFilterGenerator class](#)
 - [NotContainsWord method: SearchFilterGenerator class](#)
 - [NotEqualsString method: SearchFilterGenerator class](#)
- Numeric filters:
 - [EqualsNumber method: SearchFilterGenerator class](#)
 - [GreaterThanEqualsNumber method: SearchFilterGenerator class](#)
 - [GreaterThanNumber method: SearchFilterGenerator class](#)
 - [LessThanEqualsNumber method: SearchFilterGenerator class](#)
 - [LessThanNumber method: SearchFilterGenerator class](#)
 - [NotEqualsNumber method: SearchFilterGenerator class](#)
- Date and datetime filters:
 - [AfterDate method: SearchFilterGenerator class](#)
 - [AfterDateTime method: SearchFilterGenerator class](#)
 - [AfterDateValue method: SearchFilterGenerator class](#)
 - [BeforeDate method: SearchFilterGenerator class](#)
 - [BeforeDateTime method: SearchFilterGenerator class](#)
 - [BeforeDateValue method: SearchFilterGenerator class](#)
 - [EqualsDate method: SearchFilterGenerator class](#)
 - [EqualsDateTime method: SearchFilterGenerator class](#)
 - [EqualsDateValue method: SearchFilterGenerator class](#)
 - [NotEqualsDate method: SearchFilterGenerator class](#)
 - [NotEqualsDateTime method: SearchFilterGenerator class](#)
 - [NotEqualsDateValue method: SearchFilterGenerator class](#)
 - [OnOrAfterDate method: SearchFilterGenerator class](#)
 - [OnOrAfterDateTime method: SearchFilterGenerator class](#)
 - [OnOrAfterDateValue method: SearchFilterGenerator class](#)
 - [OnOrBeforeDate method: SearchFilterGenerator class](#)
 - [OnOrBeforeDateTime method: SearchFilterGenerator class](#)
 - [OnOrBeforeDateValue method: SearchFilterGenerator class](#)
- Score boosting methods:
 - [BoostCompositeFilterScore method: SearchFilterGenerator class](#)
 - [BoostFilterScore method: SearchFilterGenerator class](#)
 - [setBoostMode method: SearchFilterGenerator class](#)

[setBoostModeAverage method: SearchFilterGenerator class](#)

[setBoostModeMaximum method: SearchFilterGenerator class](#)

[setBoostModeMinimum method: SearchFilterGenerator class](#)

[setBoostModeSum method: SearchFilterGenerator class](#)

SearchFilterGenerator Class Methods

In this section, the SearchFilterGenerator class methods are presented in alphabetical order.

Related Topics

- [Search Filter Generator Examples](#)
This section provides additional code examples for generating search filters using the SearchFilterGenerator class:

AddQueryFilter method: SearchFilterGenerator class

Syntax

```
AddQueryFilter(&srch_qry)
```

Description

Use this method to push the composite query filter onto the array of filters in the SearchQuery object.

Parameters

Parameter	Description
<i>&srch_qry</i>	Specifies the query as a SearchQuery object.

Returns

None.

Related Topics

- [SetQueryFilter method: SearchFilterGenerator class](#)
- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:
- [Filters property: SearchQuery class](#)

AfterDate method: SearchFilterGenerator class

Syntax

```
AfterDate(srch_field, datetime)
```

Description

Use this method to generate a datetime filter on the specified search field for dates after the specified value.

Note

The AfterDate method is equivalent to the AfterDateTime method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

AfterDateTime method: SearchFilterGenerator class

Syntax

```
AfterDateTime(srch_field, datetime)
```

Description

Use the AfterDateTime method to generate a datetime filter on the specified search field for dates after the specified value.

Note

The AfterDateTime method is equivalent to the AfterDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

AfterDateValue method: SearchFilterGenerator class

Syntax

```
AfterDateValue(srch_field, date)
```

Description

Use the AfterDateValue method to generate a date filter on the specified search field for dates after the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

AppendFilter method: SearchFilterGenerator class

Syntax

```
AppendFilter(&SearchFilter)
```

Description

Use the AppendFilter method to append the filter from one SearchFilterGenerator object to another SearchFilterGenerator object.

Parameters

Parameter	Description
& <i>SearchFilter</i>	Specifies the filter as a SearchFilter object.

Returns

None.

Example

```
import PT_SEARCH:SearchFilter;  
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &SFG1 = create  
PT_SEARCH:SearchFilterGenerator();  
Local PT_SEARCH:SearchFilterGenerator &SFG2 = create  
PT_SEARCH:SearchFilterGenerator();  
Local PT_SEARCH:SearchFilter &Flt = create PT_SEARCH:SearchFilter();  
  
&Flt = &SFG2.GetFilter();  
&SFG1.AppendFilter(&Flt);
```

Related Topics

- [GetFilter method: SearchFilterGenerator class](#)

BeforeDate method: SearchFilterGenerator class

Syntax

`BeforeDate(srch_field, datetime)`

Description

Use this method to generate a datetime filter on the specified search field for dates before the specified value.

Note

The BeforeDate method is equivalent to the BeforeDateTime method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

BeforeDateTime method: SearchFilterGenerator class

Syntax

```
BeforeDateTime(srch_field, datetime)
```

Description

Use the BeforeDateTime method to generate a datetime filter on the specified search field for dates before the specified value.

Note

The BeforeDateTime method is equivalent to the BeforeDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

BeforeDateValue method: SearchFilterGenerator class

Syntax

```
BeforeDateValue(srch_field, date)
```

Description

Use the BeforeDateValue method to generate a date filter on the specified search field for dates before the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

BoostCompositeFilterScore method: SearchFilterGenerator class

Syntax

```
BoostCompositeFilterScore(boost)
```

Description

Use the BoostCompositeFilterScore method to boost the score of a combination of filters together. Using this method in the formation of a search filter indicates that the score of the search results is boosted from the default scoring used by the search engine. When two or more score boosts have been applied to individual search filters, then specify the boost mode. Otherwise, the default boost mode is MIN, which is equivalent to executing the setBoostModeMinimum method.

Note

The PeopleSoft Search Framework scores results from 0-100, meaning the maximum score for a search result row is 100.

Parameters

Parameter	Description
<i>boost</i>	Specifies the score boost as number value from 0.00 to 1.00 (that is, as a percentage). For example, if a boost of 2 points is desired, set <i>boost</i> to 0.02.

Returns

None.

Example

In the following example, the score returned by the search engine is boosted by 2 points if either (or both) of the filters returns a result:

```
If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("QE_YEAR_H", "07");
    &fg.ContainsWord("QE_STATUS", "Draft");
    &fg.BoostCompositeFilterScore(0.02);
    &fg.EndMatchAny();
End-If;
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

BoostFilterScore method: SearchFilterGenerator class

Syntax

`BoostFilterScore(boost)`

Description

Use the `BoostFilterScore` method to boost the score of specific filter match. Using this method in the formation of a search filter indicates that the score of the search results is boosted from the default scoring used by the search engine. When two or more score boosts have been applied to individual search filters, then specify the boost mode. Otherwise, the default boost mode is MIN, which is equivalent to executing the `setBoostModeMinimum` method.

You may also use the `BoostFilterScore` method to boost the score of a keyword without performing a filter match. In this case, you should only pass the keyword to the `BoostFilterScore` method; do not pass the field name. If the keyword exists anywhere in the document, the score of the document is boosted by the specified score. Alternatively, you may use the `BoostWithoutFilter` property.

Note

The PeopleSoft Search Framework scores results from 0-100, meaning the maximum score for a search result row is 100.

Parameters

Parameter	Description
<i>boost</i>	Specifies the score boost as number value from 0.00 to 1.00 (that is, as a percentage). For example, if a boost of 2 points is desired, set <i>boost</i> to 0.02.

Returns

None.

Example

In the following example, filter match is performed and the score returned by the search engine is boosted by 2 points:

```
If &fg.MatchAllReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "support");
    &fg.BoostFilterScore(0.02);
```

```
&fg.EndMatchAll();  
End-If;
```

In the following example, only the keyword is passed to the method; not the field name. The score of the result is boosted by 2 points if the specified keyword finds a match anywhere in the document.

```
If &fg.MatchAllReturnTrue() Then  
    &fg.ContainsWord("", "support");  
    &fg.BoostFilterScore(0.02);  
    &fg.EndMatchAll();  
End-If;
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)
- [BoostWithoutFilter property: SearchFilterGenerator class](#)

ContainsKeyWords method: SearchFilterGenerator class

Syntax

```
ContainsKeyWords(srch_field, words)
```

Description

Use the ContainsKeyWords method to generate a string filter that matches strings. Unlike the ContainsWord method, this method allows to supply logical operator (& or |) to separate words within the *words* parameter. If no operator is specified, then the default & operator is used.

! Important

This method cannot be used in conjunction with any of the score boosting methods.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>words</i>	Specifies the keywords as a string.

Returns

None.

Example

In the following example, the search filter returns results that match either apples or oranges:

```
&SFG.ContainsKeywords(&sAttrName," apples | oranges");
```

In the following example, the search filter returns results that match both apples and oranges:

```
&SFG.ContainsKeywords(&sAttrName," apples & oranges");
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

ContainsPartialWord method: SearchFilterGenerator class

Syntax

```
ContainsPartialWord(srch_field, fragment)
```

Description

Use this method to generate a string filter that matches strings containing a word that begins with the specified partial word.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>fragment</i>	Specifies the word fragment as a string.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

ContainsPhrase method: SearchFilterGenerator class

Syntax

```
ContainsPhrase(srch_field, phrase)
```

Description

Use this method to generate a string filter that matches strings containing the exact phrase.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>phrase</i>	Specifies the exact phrase as a string.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

ContainsWord method: SearchFilterGenerator class

Syntax

```
ContainsWord(srch_field, word)
```

Description

Use the ContainsWord method to generate a string filter that matches strings containing the exact word or words. Words are separated by spaces and the logical *and* operator is implied; explicit logical operators are not supported between the words. This method forms the filter to find a match on all the words in the *word* parameter.

Note

While the *word* parameter can include one or more words, this method differs from the ContainsPhrase method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>word</i>	Specifies the exact word or words as a string.

Returns

None.

Example

Consider a document that includes the following sentence:

Apples are tastier than oranges.

The following use of ContainsWord will return a match.

```
&fg.ContainsWord("LONG_TEXT", "apples oranges");
```

However, the following use of ContainsPhrase will not return a match.

```
&fg.ContainsPhrase("LONG_TEXT", "apples oranges");
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

DateToDatetime method: SearchFilterGenerator class

Syntax

```
DateToDatetime(date)
```

Description

Use this method to convert a date value to datetime value. The time portion of the value is set to 12:00:00.

Parameters

Parameter	Description
<i>date</i>	Specifies the date value to be converted.

Returns

A datetime value.

Related Topics

- [StringDateToDatetime method: SearchFilterGenerator class](#)

EndMatchAll method: SearchFilterGenerator class

Syntax

```
EndMatchAll()
```

Description

Use this method to mark the end of a temporary composite search filter initiated by MatchAll or MatchAllReturnTrue. This temporary composite search filter is then pushed onto the array of filters for the preceding search filter.

Parameters

None.

Returns

None.

Related Topics

- [MatchAll method: SearchFilterGenerator class](#)
- [MatchAllReturnTrue method: SearchFilterGenerator class](#)

EndMatchAny method: SearchFilterGenerator class

Syntax

```
EndMatchAny()
```

Description

Use this method to mark the end of a temporary composite search filter initiated by MatchAny or MatchAnyReturnTrue. This temporary composite search filter is then pushed onto the array of filters for the preceding search filter.

Parameters

None.

Returns

None.

Related Topics

- [MatchAny method: SearchFilterGenerator class](#)
- [MatchAnyReturnTrue method: SearchFilterGenerator class](#)

EqualsDate method: SearchFilterGenerator class

Syntax

```
EqualsDate(srch_field, datetime)
```

Description

Use this method to generate a datetime filter on the specified search field for dates equal to the specified value.

Note

The EqualsDate method is equivalent to the EqualsDateTime method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

EqualsDateTime method: SearchFilterGenerator class

Syntax

```
EqualsDateTime(srch_field, datetime)
```

Description

Use the EqualsDateTime method to generate a datetime filter on the specified search field for dates equal to the specified value.

Note

The EqualsDateTime method is equivalent to the EqualsDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

EqualsDateValue method: SearchFilterGenerator class

Syntax

```
EqualsDateValue(srch_field, date)
```


Description

Use the EqualsDateValue method to generate a date filter on the specified search field for dates equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

EqualsNumber method: SearchFilterGenerator class

Syntax

```
EqualsNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

EqualsString method: SearchFilterGenerator class

Syntax

```
EqualsString(srch_field, string)
```

Description

Use this method to generate a string filter on the specified search field for strings equal to the specified value.

! Important

This method cannot be used in conjunction with any of the score boosting methods.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>string</i>	Specifies the search string as a String value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

GetFilter method: SearchFilterGenerator class

Syntax

```
GetFilter()
```

Description

Use the GetFilter method to return the root filter (the first element of the filter array) for the specified SearchFilterGenerator object.

Parameters

None.

Returns

A SearchFilter object.

Example

```
&Flt = &SFG2.GetFilter();
```

Related Topics

- [SearchFilter Class](#)
This section provides an overview of the SearchFilter class and discusses:

GreaterThanEqualsNumber method: SearchFilterGenerator class

Syntax

```
GreaterThanEqualsNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers greater than or equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

GreaterThanNumber method: SearchFilterGenerator class

Syntax

```
GreaterThanNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers greater than the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

LessThanEqualsNumber method: SearchFilterGenerator class

Syntax

```
LessThanEqualsNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers less than or equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

LessThanNumber method: SearchFilterGenerator class

Syntax

```
LessThanNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers less than the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

MatchAll method: SearchFilterGenerator class

Syntax

```
MatchAll()
```

Description

Use this method to initiate a temporary composite search filter using the & filter connector between filters.

Parameters

None.

Returns

None.

Example

In the following example, the composite filter consists of two filters joined by the & filter connector:

```
&fg.MatchAll();  
&fg.NotEqualsString("a", "x");  
&fg.NotEqualsString("b", "y");  
&fg.EndMatchAll();
```

Related Topics

- [EndMatchAll method: SearchFilterGenerator class](#)
- [MatchAllReturnTrue method: SearchFilterGenerator class](#)

MatchAllReturnTrue method: SearchFilterGenerator class

Syntax

```
MatchAllReturnTrue()
```

Description

Use this method to initiate a temporary composite search filter using the & filter connector between filters. Since successful execution of this method returns True, you can use this method in logical expressions.

Parameters

None.

Returns

A Boolean value.

Example

In the following example, the composite filter consists of two filters joined by the & filter connector:

```
If &fg.MatchAllReturnTrue() Then
    &fg.NotEqualsString("a", "x");
    &fg.NotEqualsString("b", "y");
    &fg.EndMatchAll();
End-If;
```

Related Topics

- [EndMatchAll method: SearchFilterGenerator class](#)
- [MatchAll method: SearchFilterGenerator class](#)

MatchAny method: SearchFilterGenerator class

Syntax

```
MatchAny( )
```

Description

Use this method to initiate a temporary composite search filter using the | filter connector between filters.

Parameters

None.

Returns

None.

Related Topics

- [EndMatchAny method: SearchFilterGenerator class](#)
- [MatchAnyReturnTrue method: SearchFilterGenerator class](#)

MatchAnyReturnTrue method: SearchFilterGenerator class

Syntax

```
MatchAnyReturnTrue( )
```

Description

Use this method to initiate a temporary composite search filter using the | filter connector between filters. Since successful execution of this method returns True, you can use this method in logical expressions.

Parameters

None.

Returns

A Boolean value.

Example

In the following example, the final composite filter consists of two composite filters each consisting of two filters. The individual filters and the composite filters are all joined by the | filter connector:

```
If &fg.MatchAnyReturnTrue() Then

    If &fg.MatchAnyReturnTrue() Then
        &fg.LessThanNumber("c", 4);
        &fg.GreaterThanNumber("c", 5);
        &fg.EndMatchAny();
    End-If;

    If &fg.MatchAnyReturnTrue() Then
        &fg.ContainsWord("d", "x");
        &fg.EqualsString("e", "z");
        &fg.EndMatchAny();
    End-If;

    &fg.EndMatchAny();
```

Related Topics

- [EndMatchAny method: SearchFilterGenerator class](#)
- [MatchAny method: SearchFilterGenerator class](#)

NotContainsWord method: SearchFilterGenerator class

Syntax

```
NotContainsWord(srch_field, word)
```

Description

Use the NotContainsWord method to generate a string filter that does not match strings containing the exact word or words. Words are separated by spaces and the logical *and* operator is implied; explicit logical operators are not supported between the words. This method forms the filter to find a match on all the words in the *word* parameter.

Note

While the *word* parameter can include one or more words, this parameter is not equivalent to a phrase.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>word</i>	Specifies the exact word or words as a string.

Returns

None.

Example

Consider a document that includes the following sentence:

Apples are tastier than oranges.

The following use of `NotContainsWord` will exclude this document.

```
&fg.NotContainsWord("LONG_TEXT", "apples oranges");
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

NotEqualsDate method: SearchFilterGenerator class

Syntax

```
NotEqualsDate(srch_field, datetime)
```

Description

Use this method to generate a datetime filter on the specified search field for dates not equal to the specified value.

Note

The `NotEqualsDate` method is equivalent to the `NotEqualsDateTime` method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

NotEqualsDateTime method: SearchFilterGenerator class

Syntax

```
NotEqualsDateTime(srch_field, datetime)
```

Description

Use the NotEqualsDateTime method to generate a datetime filter on the specified search field for dates not equal to the specified value.

Note

The NotEqualsDateTime method is equivalent to the NotEqualsDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

NotEqualsDateValue method: SearchFilterGenerator class

Syntax

```
NotEqualsDateValue(srch_field, date)
```

Description

Use the NotEqualsDateValue method to generate a date filter on the specified search field for dates not equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.

Parameter	Description
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

NotEqualsNumber method: SearchFilterGenerator class

Syntax

```
NotEqualsNumber(srch_field, number)
```

Description

Use this method to generate a numeric filter on the specified search field for numbers not equal to the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>number</i>	Specifies the search value as a Number value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

NotEqualsString method: SearchFilterGenerator class

Syntax

```
NotEqualsString(srch_field, string)
```

Description

Use this method to generate a string filter on the specified search field for strings not equal to the specified value.

! Important

This method cannot be used in conjunction with any of the score boosting methods.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>string</i>	Specifies the search string as a String value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrAfterDate method: SearchFilterGenerator class

Syntax

```
OnOrAfterDate(srch_field, datetime)
```

Description

Use this method to generate a datetime filter on the specified search field for dates on or after the specified value.

i Note

The OnOrAfterDate method is equivalent to the OnOrAfterDateTime method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrAfterDateTime method: SearchFilterGenerator class

Syntax

```
OnOrAfterDateTime(srch_field, datetime)
```

Description

Use the OnOrAfterDateTime method to generate a datetime filter on the specified search field for dates on or after the specified value.

Note

The OnOrAfterDateTime method is equivalent to the OnOrAfterDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrAfterDateValue method: SearchFilterGenerator class

Syntax

```
OnOrAfterDateValue(srch_field, date)
```

Description

Use the OnOrAfterDateValue method to generate a date filter on the specified search field for dates on or after the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrBeforeDate method: SearchFilterGenerator class

Syntax

```
OnOrBeforeDate(srch_field, datetime)
```

Description

Use this method to generate a datetime filter on the specified search field for dates on or before the specified value.

Note

The OnOrBeforeDate method is equivalent to the OnOrBeforeDateTime method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrBeforeDateTime method: SearchFilterGenerator class

Syntax

```
OnOrBeforeDateTime(srch_field, datetime)
```

Description

Use the OnOrBeforeDateTime method to generate a datetime filter on the specified search field for dates on or before the specified value.

Note

The OnOrBeforeDateTime method is equivalent to the OnOrBeforeDate method.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>datetime</i>	Specifies the date as a datetime value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

OnOrBeforeDateValue method: SearchFilterGenerator class

Syntax

```
OnOrBeforeDateValue(srch_field, date)
```

Description

Use the OnOrBeforeDateValue method to generate a date filter on the specified search field for dates on or before the specified value.

Parameters

Parameter	Description
<i>srch_field</i>	Specifies the search field name as a string.
<i>date</i>	Specifies the date as a date value.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:

SearchFilterGenerator method: SearchFilterGenerator class

Syntax

```
SearchFilterGenerator()
```

Description

Use this constructor to instantiate a SearchFilterGenerator object. Similar to the MatchAll method, the composite filter is initialized with the & filter connector.

Parameters

None.

Returns

None.

Example

Instantiate the SearchFilterGenerator class as follows:

```
Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();
```

setBoostMode method: SearchFilterGenerator class

Syntax

```
setBoostMode(mode)
```

Description

Use the setBoostMode method to specify the computation to be performed to determine the final boost score when two or more score boosts have been applied to individual search filters.

Parameters

Parameter	Description
<i>mode</i>	Specifies the boost mode as a string value: “ADD” – To set the computed boost to the sum of all the matches. Equivalent to setBoostModeSum method: SearchFilterGenerator class. “AVG” – To set the computed boost to the average of all of the matches. Equivalent to setBoostModeAverage method: SearchFilterGenerator class. “MAX” – To set the computed boost to the maximum score from all of the matches. Equivalent to setBoostModeMaximum method: SearchFilterGenerator class. “MIN” – To set the computed boost to the minimum score from all of the matches. Equivalent to setBoostModeMinimum method: SearchFilterGenerator class. Note: MIN is the default boost mode.

Returns

None.

Example

In the following example, if there is a match for both filters, then the score would be boosted by 5 points, which is the sum of the score boosts; otherwise, if just one filter is matched, then the score is boosted by that match alone:

```
If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "support");
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_STATUS", "open");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAny();
    &fg.setBoostMode("ADD");
    Rem &fg.setBoostModeSum(); /* Equivalent mode */
End-If;
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

setBoostModeAverage method: SearchFilterGenerator class

Syntax

```
setBoostModeAverage()
```

Description

Use the setBoostModeAverage method to set the computed boost to the average of all of the matches.

Parameters

None.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

setBoostModeFirst method: SearchFilterGenerator class

Syntax

```
setBoostModeFirst()
```

Description

Use the setBoostModeFirst method to set the computed boost with the score of the first filter match.

Parameters

None.

Returns

None.

setBoostModeMaximum method: SearchFilterGenerator class

Syntax

```
setBoostModeMaximum()
```

Description

Use the setBoostModeMaximum method to set the computed boost to the maximum score from all of the matches.

Parameters

None.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

setBoostModeMinimum method: SearchFilterGenerator class

Syntax

```
setBoostModeMinimum()
```

Description

Use the setBoostModeMinimum method to set the computed boost to the minimum score from all of the matches.

Note

Minimum is the default boost mode.

Parameters

None.

Returns

None.

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

setBoostModeMultiply method: SearchFilterGenerator class

Syntax

```
setBoostModeMultiply()
```

Description

Use the setBoostModeMultiply method to set the computed boost with the product of the score from all of the matches.

Parameters

None.

Returns

None.

setBoostModeSum method: SearchFilterGenerator class

Syntax

```
setBoostModeSum()
```

Description

Use the setBoostModeSum method to set the computed boost to the sum of all of the matches.

Parameters

None.

Returns

None.

Example

In the following example, if there is a match for both filters, then the score would be boosted by 5 points, which is the sum of the score boosts; otherwise, if just one filter is matched, then the score is boosted by that match alone:

```
If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "support");
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_STATUS", "open");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAny();
    &fg.setBoostModeSum();
    Rem &fg.setBoostMode("ADD"); /* Equivalent mode */
End-If;
```

Related Topics

- [Related SearchFilterGenerator Methods](#)
Search filter methods can be categorized as follows:
- [Score Boosting Examples](#)

SetQueryFilter method: SearchFilterGenerator class

Syntax

```
SetQueryFilter(&srch_qry)
```

Description

Use this method to set the composite query filter as the array of filters for the SearchQuery object.

Parameters

Parameter	Description
<i>&srch_qry</i>	Specifies the query as a SearchQuery object.

Returns

None.

Related Topics

- [AddQueryFilter method: SearchFilterGenerator class](#)
- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:
- [Filters property: SearchQuery class](#)

setQueryScoreBoostAverage method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostAverage()
```

Description

Use the `setQueryScoreBoostAverage` method to replace the final document score with the average of the custom weighted score calculated by the program and the relevance score computed by the search server.

Parameters

None.

Returns

None.

setQueryScoreBoostMaximum method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostMaximum()
```

Description

Use the `setQueryScoreBoostMaximum` method to replace the final document score with the highest value between the custom weighted score calculated by the program and the relevance score computed by the search server.

Parameters

None.

Returns

None.

setQueryScoreBoostMinimum method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostMinimum()
```

Description

Use the `setQueryScoreBoostMinimum` method to replace the final document score with the lowest value between the custom weighted score calculated by the program and the relevance score computed by the search server.

Parameters

None.

Returns

None.

setQueryScoreBoostMultiply method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostMultiply()
```

Description

Use the setQueryScoreBoostMultiply method to replace the final document score with the product of the custom weighted score calculated by the program and the relevance score computed by the search server.

Parameters

None.

Returns

None.

setQueryScoreBoostReplace method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostReplace()
```

Description

Use the setQueryScoreBoostReplace method to replace the final document score with the custom weighted score calculated by the program instead of the relevance score computed by the search server.

Parameters

None.

Returns

None.

setQueryScoreBoostSum method: SearchFilterGenerator class

Syntax

```
setQueryScoreBoostSum()
```

Description

Use the `setQueryScoreBoostSum` method to replace the final document score with the sum of the custom weighted score calculated by the program and the relevance score computed by the search server.

Parameters

None.

Returns

None.

Example

```
If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "support");
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_STATUS", "open");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAny();
    &fg.setBoostMode("ADD");
    &fg. setQueryScoreBoostSum ();
End-If;
```

StringDateToDatetime method: SearchFilterGenerator class

Syntax

`StringDateToDatetime(str_date)`

Description

Use this method to convert a string value representing a date to datetime value. The time portion of the value is set to 12:00:00.

Parameters

Parameter	Description
<i>str_date</i>	Specifies the string value representing a date to be converted.

Returns

A datetime value.

Related Topics

- [DateToDatetime method: SearchFilterGenerator class](#)

SearchFilterGenerator Class Properties

In this section, the SearchFilterGenerator class property is discussed.

BoostWithoutFilter property: SearchFilterGenerator class

Description

Use this property to boost the score of a keyword without applying a filter. Because a filter is not applied, you may obtain more results, but the score of a keyword is boosted when the keyword match is found.

You may also use this property along with valid filters, which can be applied on some fields to narrow the search results.

Example

The following code snippet applies a filter and boosts the score of the keyword when the keyword match is found.

```
Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

/* For applying query filter- These filters are applied to the search query
to narrow down the result set */
If &fg.MatchAllReturnTrue() Then
    &fg.EqualsString("BUSINESS_UNIT", "US001");
    &fg.ContainsWord("NAME", "Alex");
    &fg.EndMatchAll();
End-If;
&fg.SetQueryFilter(&qry);

/* For boosting score for the match of a given keyword */
Local PT_SEARCH:SearchFilterGenerator &fgBoost = create
PT_SEARCH:SearchFilterGenerator();
&fgBoost.BoostWithoutFilter = True;
If &fgBoost.MatchAnyReturnTrue() Then
    &fgBoost.EqualsString("", "FPNIR878");
    &fgBoost.BoostFilterScore(0.01);
    &fgBoost.ContainsWord("", "support");
    &fgBoost.BoostFilterScore(0.05);
    &fgBoost.EndMatchAny();
End-If;
&fgBoost.setBoostModeSum();
&fgBoost.setQueryScoreBoostSum();
&fgBoost.SetQueryFilter(&qry);
```

Related Topics

- [BoostFilterScore method: SearchFilterGenerator class](#)

Search Filter Generator Examples

This section provides additional code examples for generating search filters using the SearchFilterGenerator class:

- Creating complex search filters.
- Boosting the score of filter matches.

Note

The & is the default connector; therefore, for composite filters, MatchAll is implied and does not have to be explicitly specified.

Creating Complex Filters

Example 1 — Using an Explicit Or

The following example generates a composite search filter with Field1 equal to string X or Field2 containing string Y:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();
&fg.MatchAny();
&fg.EqualsString("Field1", &str_X);
&fg.ContainsWord("Field2", &str_Y);
&fg.EndMatchAny();
&fg.SetQueryFilter(&qry);
```

See [MatchAny method: SearchFilterGenerator class](#) for more information.

Example 2 — Using an Implicit And

The following example generates a composite search filter with Field1 equal to string X and Field2 containing string Y:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();
/* The & is the default connector; therefore, MatchAll is implied and does
not */
/* have to be explicitly specified. */
&fg.EqualsString("Field1", &str_X);
&fg.ContainsWord("Field2", &str_Y);
&fg.SetQueryFilter(&qry);
```

See [MatchAll method: SearchFilterGenerator class](#) for more information.

Example 3 — Specifying a Complex, Composite Filter

To generate the following composite search filter ((Field1 = string X & Field2 > number N1) & ((Field3 >= number N2 & Field3 <= number N3) | (Field4 = string A | Field4 = string B | Field4 = string C)))

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();
If &fg.MatchAllReturnTrue() Then
```



```

        &fg.EqualsString("Field1", &str_X);
        &fg.GreaterThanNumber("Field2", &N1);
        &fg.EndMatchAll();
    End-If;

    If &fg.MatchAnyReturnTrue() Then
        If &fg.MatchAllReturnTrue() Then
            &fg.GreaterThanEqualsNumber("Field3", &N2);
            &fg.LessThanEqualsNumber("Field3", &N3);
            &fg.EndMatchAll();
        End-If;
        If &fg.MatchAnyReturnTrue() Then
            &fg.EqualsString("Field4", &str_A);
            &fg.EqualsString("Field4", &str_B);
            &fg.EqualsString("Field4", &str_C);
            &fg.EndMatchAny();
        End-If;
        &fg.EndMatchAny();
    End-If;

    &fg.SetQueryFilter(&qry);

```

Example 4 — Specifying a Numeric Filter Between Two Values

The following example generates a composite search filter with BU equal to 001 and price between 10 and 200:

```

import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

&fg.EqualsString("BU", "001");
If &fg.MatchAllReturnTrue() Then
    &fg.GreaterThanEqualsNumber("PRICE", 10);
    &fg.LessThanEqualsNumber("PRICE", 200);
    &fg.EndMatchAll();
End-If;
&fg.SetQueryFilter(&qry);

```

See [GreaterThanEqualsNumber method: SearchFilterGenerator class](#) and [LessThanEqualsNumber method: SearchFilterGenerator class](#) for more information.

Example 5 — Specifying a String Filter Within a Set of Values

The following example generates a composite search filter with BU equal to 001 and status in (Open, Pending, Approved):

```

import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

&fg.EqualsString("BU", "001");
If &fg.MatchAnyReturnTrue() Then

```

```
&fg.EqualsString("STATUS", "Open");
&fg.EqualsString("STATUS", "Pending");
&fg.EqualsString("STATUS", "Approved");
&fg.EndMatchAny();
End-If;

&fg.SetQueryFilter(&qry);
```

See [EqualsString method: SearchFilterGenerator class](#) for more information.

Example 6 — Specifying a String Filter Not in a Set of Values

The following example generates a composite search filter with BU equal to 001 and status not in (Open, Pending, Approved):

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

&fg.EqualsString("BU", "001");
If &fg.MatchAllReturnTrue() Then
    &fg.NotEqualsString("STATUS", "Open");
    &fg.NotEqualsString("STATUS", "Pending");
    &fg.NotEqualsString("STATUS", "Approved");
    &fg.EndMatchAll();
End-If;

&fg.SetQueryFilter(&qry);
```

See [NotEqualsString method: SearchFilterGenerator class](#) for more information.

Score Boosting Examples

Note

When two or more score boosts have been applied to individual search filters, then specify the boost mode. Otherwise, the default boost mode is MIN, which is equivalent to executing the `setBoostModeMinimum` method.

Example 1 — Specifying a Single Score Boost

In the following example, the score returned by the search engine is boosted by 2 points if there is a match:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAllReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "support");
```

```
        &fg.BoostFilterScore(0.02);  
        &fg.EndMatchAll();  
End-If;
```

Example 2 — Using the Default Score Boost Mode (with MatchAll)

In the following example, the score returned by the search engine is boosted by 2 points when all filters match because the default boost mode of minimum is applied when no boost mode is explicitly defined:

```
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &fg = create  
PT_SEARCH:SearchFilterGenerator();  
  
If &fg.MatchAllReturnTrue() Then  
    &fg.ContainsWord("DEPTNAME", "support");  
    &fg.BoostFilterScore(0.02);  
    &fg.ContainsWord("QE_STATUS", "open");  
    &fg.BoostFilterScore(0.03);  
    &fg.EndMatchAll();  
End-If;
```

Example 2 — Using the Default Score Boost Mode (with MatchAny)

Similarly, in the following example, the score returned by the search engine is also boosted by 2 points when both filter matches because the default boost mode of minimum is applied when no boost mode is explicitly defined; however if only one filter matches, then the score is boosted by that match alone:

```
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &fg = create  
PT_SEARCH:SearchFilterGenerator();  
  
If &fg.MatchAnyReturnTrue() Then  
    &fg.ContainsWord("DEPTNAME", "support");  
    &fg.BoostFilterScore(0.02);  
    &fg.ContainsWord("QE_STATUS", "open");  
    &fg.BoostFilterScore(0.03);  
    &fg.EndMatchAny();  
End-If;
```

Example 3 — Specifying Sum as the Score Boost Mode

In the following example, if there is a match for both filters, then the score would be boosted by 5 points, which is the sum of the score boosts; otherwise, if just one filter is matched, then the score is boosted by that match alone:

```
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &fg = create  
PT_SEARCH:SearchFilterGenerator();  
  
If &fg.MatchAnyReturnTrue() Then
```

```

    &fg.ContainsWord("DEPTNAME", "support");
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_STATUS", "open");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAny();
    &fg.setBoostModeSum();
    Rem &fg.setBoostMode("ADD"); /* Equivalent mode */
End-If;

```

See [setBoostMode method: SearchFilterGenerator class](#) and [setBoostModeSum method: SearchFilterGenerator class](#) for more information.

Example 4 — Adding a Filter That Does Not Include a Score Boost

The score returned by the search engine is boosted by 5 points, which is the sum of the score boosts; otherwise, if just one filter is matched, then the score is boosted by that match alone. While this example includes a third filter (city = Sydney), it does not contribute to the score boosting.

```

import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "systems");
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_STATUS", "draft");
    &fg.BoostFilterScore(0.03);
    &fg.ContainsWord("CITY", "Sydney");
    &fg.EndMatchAny();
    &fg.setBoostModeSum();
End-If;

```

Example 5 — Using the BoostCompositeFilterScore Method

While the BoostCompositeFilterScore method provides a boost of 2 points for the inner block of filters (match any), the entire score boost would be 6 points if all filters match:

```

import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAllReturnTrue() Then
    &fg.ContainsWord("DEPTNAME", "Support");
    &fg.BoostFilterScore(0.02);
    Local date &date = Date("2009/05/07");
    &fg.AfterDateValue("OPEN_DT", &date);
    &fg.BoostFilterScore(0.02);
    &fg.ContainsWord("QE_YEAR_H", "2009");
    If &fg.MatchAnyReturnTrue() Then
        &fg.ContainsWord("QE_YEAR_H", "07");
        &fg.ContainsWord("QE_STATUS", "Draft");
        &fg.BoostCompositeFilterScore(0.02);
    End-If;
End-If;

```

```
        &fg.EndMatchAny();  
    End-If;  
    &fg.EndMatchAll();  
    &fg.setBoostModeSum();  
End-If;
```

See [BoostCompositeFilterScore method: SearchFilterGenerator class](#) for more information.

Example 7 — Using the ContainsPhrase Method

In the following example, the score returned by the search engine is boosted by 2 points when the phrase is matched exactly:

```
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &fg = create  
PT_SEARCH:SearchFilterGenerator();  
  
If &fg.MatchAnyReturnTrue() Then  
    &fg.ContainsPhrase("MESSAGE_TEXT", "some long days");  
    &fg.BoostFilterScore(0.02);  
    &fg.EndMatchAny();  
End-If;
```

See [ContainsPhrase method: SearchFilterGenerator class](#) for more information.

Example 8 — Performing a Search Using Wildcard Characters

Use the * wildcard to search and match on one or more characters; use the ? wildcard to search and match on a single character.

In the following example, the score returned by the search engine is boosted by 1 point when all filters match because the default boost mode of minimum is applied when no boost mode is explicitly defined:

```
import PT_SEARCH:SearchFilterGenerator;  
  
Local PT_SEARCH:SearchFilterGenerator &fg = create  
PT_SEARCH:SearchFilterGenerator();  
  
If &fg.MatchAllReturnTrue() Then  
    &fg.ContainsWord("MESSAGE_TEXT", "l*g");  
    &fg.BoostFilterScore(0.01);  
    &fg.ContainsWord("MESSAGE_TEXT", "b??ght");  
    &fg.BoostFilterScore(0.02);  
    &fg.EndMatchAll();  
End-If;
```

Example 9 — Performing Stemming in a Search

Use the \$ character to indicate that stemming is to be performed.

In the following example, the score returned by the search engine is boosted by 3 points if there is a match:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAllReturnTrue() Then
    &fg.ContainsWord("MESSAGE_TEXT", "$wanted");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAll();
End-If;
```

Example 10 — Performing a Phonetic Search

Use the ! character to indicate that a phonetic search is to be performed.

In the following example, the score returned by the search engine is boosted by 3 points if there is a match:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAllReturnTrue() Then
    &fg.ContainsWord("MESSAGE_TEXT", "!smithee");
    &fg.BoostFilterScore(0.03);
    &fg.EndMatchAll();
End-If;
```

Example 11 — Performing a Fuzzy Search

Use the ~ character to indicate that a fuzzy search is to be performed.

In the following example, the score returned by the search engine is boosted by 2 points if there is a match:

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("MESSAGE_TEXT", "speeks~");
    &fg.BoostFilterScore(0.02);
    &fg.EndMatchAny();
End-If;
```

Example 12 — Specifying Custom Scoring with a Keyword-Like Search

Typically, a keyword-like search (similar to a keyword search performed on the Global Search field in the browser) would be constructed programmatically by using the QueryText property of the SearchQuery class. To specify custom scoring for a keyword-like search, you would use either the ContainsWord or ContainsPhrase methods without specifying the search field name

value (that is, it is an empty string indicating that the search is against all search fields) as show in the following example.

```
import PT_SEARCH:SearchFilterGenerator;

Local PT_SEARCH:SearchFilterGenerator &fg = create
PT_SEARCH:SearchFilterGenerator();

If &fg.MatchAnyReturnTrue() Then
    &fg.ContainsWord("", "long");
    &fg.BoostFilterScore(0.02);
    &fg.EndMatchAny();
End-If;
```

See [QueryText property: SearchQuery class](#) for more information for the typical approach to performing a keyword-like search.

Related Topics

- [BoostFilterScore method: SearchFilterGenerator class](#)
- [BoostCompositeFilterScore method: SearchFilterGenerator class](#)
- [setBoostMode method: SearchFilterGenerator class](#)

SearchQuery Class

This section provides an overview of the SearchQuery class and discusses:

- SearchQuery class methods.
- SearchQuery class properties.

The SearchQuery object is used to define the attributes of a search query—such as its category or categories (index or indexes), facet filters, query text, and so on—and then execute that query on a search engine instance. The required properties of a SearchQuery must be initialized before invoking the Execute method. However, which properties are required depend on the specific search engine. Moreover, all properties are not necessarily used for every execution of a search query. For example, if no filters are to be applied to the search then it is not necessary to initialize the Filter property.

A SearchQuery object is returned by the CreateQuery method of the SearchQueryService class.

Related Topics

- [CreateQuery method: SearchQueryService class](#)

SearchQuery Class Methods

In this section, the SearchQuery class methods are presented in alphabetical order.

BrowseFacetNodes method: SearchQuery class

Syntax

```
BrowseFacetNodes()
```

Description

Use this method to return an array of facet nodes with out actually executing a search. Because this method does not execute the search query, it is lot faster than the Execute method. This method relies on the Language property only and ignores other SearchQuery class properties and settings, such as facet filters.

① Note

This is an abstract method.

Parameters

None.

Returns

An array of FacetNode objects.

Related Topics

- [FacetNode Class](#)
This section provides an overview of the FacetNode class and discusses:

Execute method: SearchQuery class

Syntax

`Execute(start, size)`

Description

Use this method to execute the search query on the search engine. The Execute method returns search results beginning at the document number specified by *start*, and returns a maximum number of results specified by *size*.

The Execute method uses the following SearchQuery class properties:

- Categories

① Note

If this property is undefined, the query will be executed against *all* search categories.

- Language

① Note

If no value is specified, the query will be executed against *all* languages.

- QueryText

Note

If no value is specified, then *all* documents in the index are returned.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>start</i>	Specifies an integer representing the first document of the returned results. This parameter must be greater than or equal to 1. If <i>start</i> exceeds the total number of documents in the index or the search engine-specified maximum number of results, then zero results are returned.
<i>size</i>	Specifies the maximum size of the result set as an integer. This parameter should be greater than or equal to 1. If <i>size</i> is set to 0, then 10 documents are returned.

Returns

A SearchResultCollection object.

Example

```
import PT_SEARCH:SearchFactory;
import PT_SEARCH:SearchQueryService;
import PT_SEARCH:SearchQuery;
import PT_SEARCH:SearchResultCollection;

/* Instantiate the SearchQuery object */

Local PT_SEARCH:SearchFactory &factory = create PT_SEARCH:SearchFactory();
Local PT_SEARCH:SearchQueryService &svc =
&factory.CreateQueryService("default");
Local PT_SEARCH:SearchQuery &srchQuery = &svc.CreateQuery();

/* Initialize the search query */

&srchQuery.QueryText = "some text";
&srchQuery.Language = &lang_cd;
&srchQuery.MarkDuplicates = False;
&srchQuery.RemoveDuplicates = False;
```

```
/* Execute the search query */

Local number &start = 1;
Local number &size = 10;
Local PT_SEARCH:SearchResultCollection &results = &srchQuery.Execute(&start,⇒
&size);

/* Re-execute the search query to return the next 10 results */

&start = &start + &size;
&results = &srchQuery.Execute(&start, &size);
```

Related Topics

- [Categories property: SearchQuery class](#)
- [Language property: SearchQuery class](#)
- [QueryText property: SearchQuery class](#)
- [SearchResultCollection Class](#)

This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

FormatDateFilter method: SearchQuery class

Syntax

FormatDateFilter(*datefilter*)

Description

Use this method to convert dates from the internal PeopleSoft date format into a search engine-specific format. You must use this method when the query string is programmatically created.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>datefilter</i>	Specifies the search filter as a Date value.

Returns

A String value.

Related Topics

- [setDateFilter method: SearchFilter class](#)

FormatDateTimeFilter method: SearchQuery class

Syntax

```
FormatDateTimeFilter(datetmfilter)
```

Description

Use this method to convert dates from the internal PeopleSoft date/time format into a search engine-specific format. You must use this method when the query string is programmatically created.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>datetmfilter</i>	Specifies the search filter as a DateTime value.

Returns

A String value.

Related Topics

- [setDateTimeFilter method: SearchFilter class](#)

SearchQuery Class Properties

In this section, the SearchQuery class properties are presented in alphabetical order.

Categories property: SearchQuery class

Description

Use this property to set or return the list of search categories (search indexes) you want to search as an array of SearchCategory objects. If this property is defined, the Execute method will run the query on all the search categories specified in this property.

Important

If this property is undefined, the query will be executed against *all* search categories in the search engine instance.

This property is read/write.

Example

The following example uses two search categories called cat1 and cat2.

```
import PT_SEARCH:SearchCategory;

Local array of PT_SEARCH:SearchCategory &cats;

&cats = CreateArray(create PT_SEARCH:SearchCategory("cat1"));
&cats.Push(create PT_SEARCH:SearchCategory("cat2"));

&searchQuery.Categories = &cats;
```

Related Topics

- [SearchCategory Class](#)
This section provides an overview of the SearchCategory class and discusses:

ContainsAnyWords property: SearchQuery class

Description

Use this property to set a search string that contains one or more words. The search results include those documents that contain *any* of these words and whatever is defined by other search text properties (for example, ContainsExactPhrase, QueryText, or WithoutWords).

This property is not required.

This property is read/write.

ContainsExactPhrase property: SearchQuery class

Description

Use this property to set a search string that contains one or more words. The search results include those documents that this *exact phrase* and whatever is defined by other search text properties (for example, ContainsAnyWords, QueryText, or WithoutWords).

This property is not required.

This property is read/write.

ClusteringSpecs property: SearchQuery class

Description

This property is reserved for future use.

DisableScoreSort property: SearchQuery class

Description

Use this property to override the default sorting order of search results. By default, search results are sorted based on the descending order of score. If you want to use a custom sort order based on a specific field, then use this property to override the default sort order.

This property is read/write.

Example

```
&searchQuery.DisableScoreSort = True;
```

DocsRequested property: SearchQuery class

Description

Use this property to set or return the size of the result set as an integer. After invoking the `Execute` method, use this property to return the value of the *size* parameter passed to `Execute`. Alternatively, if the search query is to be executed by the `ExecuteQuery` method of the `QueryService` class, then use this property to specify the size of the result set.

Example

For example, one could compare `DocsRequested` to the `GetDocumentCount` method of the `ResultCollection` class to determine if there are possibly more documents to be retrieved.

The `StartIndex` and `DocsRequested` properties (that is, the *start* and *size* parameters to the `Execute` method) allow for “chunking” of search results. The idea is to repeatedly call `Execute` while increasing the *start* parameter by the increment specified by *size*. For example, the following psuedo-code will return the first 100 results the first time through the loop. The second time through the loop, it will return documents 101 through 200, and so on.

```
int start=1, size=100
, // return results in chunks of 100 documents
while not done
    results = query.execute(start, size)
    if (results.GetDocumentCount() < query.DocsRequested)
        done = true
        // we got fewer documents than we asked for so we're done executing
this ⇒
    // query
    if (results.GetDocumentCount() = 0)
        done = true
        // no more documents being returned so we're done executing this query

    // do something with the results

    start = start + size
end-while
```

Related Topics

- [Execute method: SearchQuery class](#)
- [StartIndex property: SearchQuery class](#)
- [GetDocumentCount method: SearchResultCollection collection](#)

EnableExtendedFilterOperators property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether to enable the set of extended filter operators (specifically, the notequals operator). In addition, when this property is set to True, all search filters are added to the QueryText property and sent to the search engine in this manner. Otherwise, when this property is set to False, the search filters are handled by the Filters property as an array of SearchFilter objects. The default value is False.

This property is not required.

This property is read/write.

Related Topics

- [Operator property: SearchFilter class](#)

FacetFilters property: SearchQuery class

Description

Use this property to set or return an array of FacetFilter objects on which the search results are currently filtered.

Note

The SearchCategory class GetFacetFilters method can be used to get the initial list of facet filters.

This property is not required.

This property is read/write.

Related Topics

- [FacetFilter Class](#)
This section provides an overview of the FacetFilter class and discusses:
- [GetFacetFilters method: SearchCategory class](#)

FilterConnector property: SearchQuery class

Description

Use this property to set or return a search filter connector as a string. A search filter connector is used to join search filters. The acceptable values are: AND and OR. The default value is AND.

This property is not required.

This property is read/write.

Related Topics

- [Filters property: SearchQuery class](#)

- [SearchFilter Class](#)
This section provides an overview of the SearchFilter class and discusses:

Filters property: SearchQuery class

Description

Use this property to set or return the list of search filters as an array of SearchFilter objects.

This property is not required.

This property is read/write.

Related Topics

- [FilterConnector property: SearchQuery class](#)
- [SearchFilter Class](#)
This section provides an overview of the SearchFilter class and discusses:

GroupingSpec property: SearchQuery class

Description

This property is reserved for future use.

IncludeImages property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether to return images in the search results.

This property is read/write.

Example

```
Local PT_SEARCH:SearchQuery &qry;  
  
...  
  
If PTSF_QRY_CLIENT.PTSF_SHOW_IMAGE = "Y" Then  
    &qry.IncludeImages = True;  
End-If;
```

Related Topics

- [GetImageUrl method: SearchResult class](#)

Language property: SearchQuery class

Description

Use this property to set or return a three-character string representing the language code to which the search query results should be restricted. This property must be a PeopleSoft language code—for example, ENG for English, FRA for French, and so on.

Note

If no value is specified, the query will be executed against *all* languages.

This property is read/write.

Example

```
&SearchQuery.Language = "ENG";
```

Related Topics

- [Global Technology: Selecting Database Character Sets](#)

MarkDuplicates property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether duplicates in the result set should be marked as such. A search result can be identified by running the `isDuplicate` method.

This property is not required. However, it defaults to `False` if no value is specified.

This property is read/write.

Related Topics

- [RemoveDuplicates property: SearchQuery class](#)
- [IsDuplicate method: SearchResult class](#)

MaximumNumberOfFacetValues property: SearchQuery class

Description

Use this property to set or return an Integer value representing the maximum number of child facet nodes. For example, if there are 100 facet values, setting this property to 10 will return the first ten facet values as determined by the sorting order. If this property is not set, the default value is -1, which indicates to return all child nodes.

This property is not required.

This property is read/write.

Related Topics

- [FacetNode Class](#)
This section provides an overview of the `FacetNode` class and discusses:

MinimumDocumentsPerFacetValue property: SearchQuery class

Description

Use this property to set or return an Integer value representing the minimum number of documents required for the child facet node to be returned. Child facet nodes with less than

this document count are not returned. If this property is not set, the default value is 1, which indicates that a facet node must have at least one document to be returned.

This property is not required.

This property is read/write.

Related Topics

- [DocumentCount property: FacetNode class](#)

ProgrammaticSearchString property: SearchQuery class

Description

Use this property to set or return the programmatically generated search string as a string. This search string is not displayed to the end user.

This property is not required.

This property is read/write.

QueryText property: SearchQuery class

Description

Use this property to set or return a string representing the text to use in the search query. The search results include those documents that contain this text and whatever is defined by other search text properties (for example, ContainsAnyWords, ContainsExactPhrase, or WithoutWords).

Note

If no value is specified and none of the other search text properties are defined, then *all* documents in the index are returned.

This property is read/write.

RemoveDuplicates property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether duplicates should be removed from the result set.

This property is not required. However, it defaults to False if no value is specified.

This property is read/write.

Related Topics

- [MarkDuplicates property: SearchQuery class](#)

RequestedFields property: SearchQuery class

Description

Use this property to set or return the list of custom attributes to be included for each search result. The list is an array of SearchField objects.

This property is not required.

This property is read/write.

Related Topics

- [GetRequestedFields method: SearchCategory class](#)
- [SearchField Class](#)

This section provides an overview of the SearchField class and discusses: .

ReturnFacetValueCounts property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether to compute and return document counts per facet node.

This property is not required. However, it defaults to True if no value is specified.

This property is read/write.

Related Topics

- [DocumentCount property: FacetNode class](#)

SearchOnlyInAttachments property: SearchQuery class

Description

Use this property to set or return a Boolean value indicating whether to support keyword search in attachments alone.

This property is read/write.

SearchWithIn property: SearchQuery class

Description

Use this property to set or return a string of search terms as a string. This is used to search within the current results.

This property is not required.

This property is read/write.

SortFacetValuesBy property: SearchQuery class

Description

Use this property to set or return a String value indicating the sort order by which facet nodes are sorted:

Value	Description
ALPHA_ASC	Sort by node name alphabetically ascending.
ALPHA_DES	Sort by node name alphabetically descending.
COUNT_ASC	Sort by document count numerically ascending.
COUNT_DES	Sort by document count numerically descending. COUNT_DES is the default value, which means that facet nodes with highest document count are displayed first in the list.

This property is not required.

This property is read/write.

Related Topics

- [DocumentCount property: FacetNode class](#)

SortSpecs property: SearchQuery class

Description

This property is reserved for future use.

StartIndex property: SearchQuery class

Description

Use this property to set or return an integer representing the first document of the result set. After invoking the Execute method, use this property to return the value of the *start* parameter passed to Execute. Alternatively, if the search query is to be executed by the ExecuteQuery method of the QueryService class, then use this property to specify the first document of the result set.

Related Topics

- [Execute method: SearchQuery class](#)
- [DocsRequested property: SearchQuery class](#)

TopN property: SearchQuery class

Description

This is reserved for future use.

WithoutWords property: SearchQuery class

Description

Use this property to set a search string that contains one or more words. The search results include those documents that *do not include* any of these words and whatever is defined by other search text properties (for example, ContainsAnyWords, ContainsExactPhrase, or QueryText).

This property is not required.

This property is read/write.

SearchQueryCollection Class

This section provides an overview of the SearchQueryCollection class and discusses SearchQueryCollection class methods.

The SearchQueryCollection class provides a collection of SearchQuery objects. Because the SearchQueryCollection class is a generic interface class, a search engine-specific subclass is required.

Related Topics

- [SearchQuery Class](#)

This section provides an overview of the SearchQuery class and discusses:

SearchQueryCollection Class Methods

In this section, the SearchQueryCollection class methods are presented in alphabetical order.

addQuery method: SearchQueryCollection collection

Syntax

```
addQuery(&srch_qry)
```

Description

Use this method to add a search query to the search query collection. The addQuery method can be called repeatedly to add multiple search queries to the collection.

Parameters

Parameter	Description
<i>&srch_qry</i>	Specifies the query as a SearchQuery object.

Returns

None.

Related Topics

- [SearchQuery Class](#)

This section provides an overview of the SearchQuery class and discusses:

Count method: SearchQueryCollection collection

Syntax

```
Count ( )
```

Description

Use this method to return the number of SearchQuery objects in the search query collection as an integer.

Parameters

None.

Returns

An Integer value.

ExecuteQuerys method: SearchQueryCollection collection

Syntax

```
ExecuteQuerys ( )
```

Description

Use this method to run multiple search queries in parallel. The ExecuteQuerys method returns an array of SearchResultCollection objects, one for each search query executed. If any of the search queries fails, ExecuteQuerys throws an exception.

Note

The number of parallel requests is determined by the thread pool size that is defined in the application server configuration file (psappsrv.cfg).

Parameters

None.

Returns

An array of SearchResultsCollection objects.

Related Topics

- [SearchResultCollection Class](#)

This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

First method: SearchQueryCollection collection

Syntax

First()

Description

Use this method to return the first SearchQuery object in the search query collection. If the search query collection is empty, this method returns Null.

Parameters

None.

Returns

A SearchQuery object if successful, Null otherwise.

Related Topics

- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:

Item method: SearchQueryCollection collection

Syntax

Item(*index*)

Description

Use this method to return the SearchQuery object at the position in the search query collection specified by the *index* parameter.

Parameters

Parameter	Description
<i>&index</i>	Specifies the position of the SearchQuery object in the search query collection as an integer.

Returns

A SearchQuery object if successful, Null otherwise.

Related Topics

- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:

Next method: SearchQueryCollection collection

Syntax

Next()

Description

Use this method to return the next SearchQuery object in the search query collection. This method can only be invoked after a successful invocation of the First, Item, or Next methods.

Parameters

None.

Returns

A SearchQuery object if successful, Null otherwise.

Related Topics

- [First method: SearchQueryCollection collection](#)
- [Item method: SearchQueryCollection collection](#)
- [SearchQuery Class](#)

This section provides an overview of the SearchQuery class and discusses:

SearchQueryService Class

This section provides an overview of the SearchQueryService class and discusses: SearchQueryService class methods.

The SearchQueryService provides the ability to instantiate a SearchQuery object along with other interfaces. Because the SearchQueryService class is an interface class, it requires a search engine-specific search query service and search query class to instantiate a search engine-specific SearchQuery object.

A SearchQueryService object is created by the CreateQueryService method of the SearchFactory class.

Related Topics

- [CreateQueryService method: SearchFactory class](#)

SearchQueryService Class Methods

In this section, the SearchQueryService class methods are presented in alphabetical order.

CreateQuery method: SearchQueryService class

Syntax

CreateQuery()

Description

Use this method to instantiate a SearchQuery object.

Note

This is an abstract method.

Parameters

None.

Returns

A SearchQuery object.

Related Topics

- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:

CreateQueryCollection method: SearchQueryService class

Syntax

```
CreateQueryCollection()
```

Description

Use this method to instantiate a search query collection.

Note

This is an abstract method.

Parameters

None.

Returns

A SearchQueryCollection object.

Related Topics

- [SearchQueryCollection Class](#)
This section provides an overview of the SearchQueryCollection class and discusses SearchQueryCollection class methods.

ExecuteQuery method: SearchQueryService class

Syntax

```
ExecuteQuery(&query)
```

Description

Use this method to execute the specified search query on the search provider and return the collection of search results. This method is equivalent to invoking the Execute method of the SearchQuery class.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>&query</i>	Specifies the search query as a SearchQuery object.

Returns

A SearchResultCollection object.

Related Topics

- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:
- [Execute method: SearchQuery class](#)
- [SearchResultCollection Class](#)
This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

ExecuteQuerys method: SearchQueryService class

Syntax

```
ExecuteQuerys(&srch_qry_coll)
```

Description

Use this method to run multiple search requests in parallel. The number of parallel request is determined by the Thread Pool Size that is defined in the application server configuration file (psappsrv.cfg).

Use this method to run multiple search queries in parallel. The ExecuteQuerys method returns an array of SearchResultCollection objects, one for each search query executed. If any of the search queries fails, ExecuteQuerys throws an exception.

Note

The number of parallel requests is determined by the thread pool size that is defined in the application server configuration file (psappsrv.cfg).

Note

This is an abstract method.

Parameters

Parameter	Description
<i>&srch_qry_coll</i>	Specifies the search queries as a SearchQueryCollection object.

Returns

An array of SearchResultCollection objects.

Related Topics

- [SearchQueryCollection Class](#)
This section provides an overview of the SearchQueryCollection class and discusses SearchQueryCollection class methods.
- [SearchResultCollection Class](#)
This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

SearchResult Class

This section provides an overview of the SearchResult class and discusses: SearchResult class methods

The SearchResult object represents a specific search result (that is, a document) in a SearchResultCollection object. Because the SearchResult class is a generic interface class, a search engine-specific subclass is required. The SearchResult object is defined to comprise 10 standard attributes (or “properties”)—for example, title, URL, summary, and so on. These private, read-only “properties” can be accessed only through the methods of the SearchResult class.

A SearchResult object is instantiated by the First, Item or Next methods of the SearchResultCollection.

Related Topics

- [SearchResultCollection Class](#)
This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

SearchResult Class Methods

In this section, the SearchResult class methods are presented in alphabetical order.

GetCategoryNames method: SearchResult class

Syntax

```
GetCategoryNames()
```

Description

Use this method to return the list of search categories to which this search result belongs as an array of string.

Parameters

None.

Returns

An array of string.

Related Topics

- [SearchCategory Class](#)
This section provides an overview of the SearchCategory class and discusses:

GetContentLength method: SearchResult class

Syntax

```
GetContentLength()
```

Description

Use this method to return the content length for this search result as an integer. If the content length cannot be determined, this method returns -1.

The content length, signature, title, and other attributes are used to determine whether a search result is a duplicate.

Parameters

None.

Returns

An integer.

Related Topics

- [IsDuplicate method: SearchResult class](#)

GetCustomAttributes method: SearchResult class

Syntax

```
GetCustomAttributes()
```

Description

Use this method to return a `SearchFieldCollection` representing the custom attributes for this search result. A `SearchFieldCollection` is a collection of `SearchField` objects.

Parameters

None.

Returns

A `SearchFieldCollection` object.

Related Topics

- [SearchFieldCollection Class](#)
This section provides an overview of the `SearchFieldCollection` class and discusses: `SearchFieldCollection` class methods.
- [SearchField Class](#)
This section provides an overview of the `SearchField` class and discusses: .

GetImageUrl method: SearchResult class

Syntax

```
GetImageUrl()
```

Description

Use the `GetImageUrl` method to return the image URL for this search result.

Parameters

None.

Returns

A String value.

Example

```
Local PT_SEARCH:SearchResult &cur;  
  
...  
  
If PTSF_QRY_CLIENT.PTSF_SHOW_IMAGE = "Y" Then  
    &rs(&i).PTSF_SRCHRESULT.PTSF_DISPIMAGEURL.Visible = True;  
    &rs(&i).PTSF_SRCHRESULT.HTMLAREA.Visible = True;  
    &imageUrl = &cur.GetImageUrl();
```

```
        &imageUrlHtml = GetHTMLText(HTML.HTML_IMAGE, &imageUrl);  
        &rs(&i).PTSF_SRCHRESULT.PTSF_DISPIMAGEURL.Value = &imageUrl;  
        &rs(&i).PTSF_SRCHRESULT.HTMLAREA.Value = &imageUrlHtml;  
    Else  
        &rs(&i).PTSF_SRCHRESULT.PTSF_DISPIMAGEURL.Visible = False;  
        &rs(&i).PTSF_SRCHRESULT.HTMLAREA.Visible = False;  
    End-If;
```

Related Topics

- [IncludeImages property: SearchQuery class](#)

GetLanguage method: SearchResult class

Syntax

```
GetLanguage()
```

Description

Use this method to return a string representing the three-character PeopleSoft language code for this search result.

Parameters

None.

Returns

A string.

Related Topics

- [Language property: SearchQuery class](#)

GetLastModified method: SearchResult class

Syntax

```
GetLastModified()
```

Description

Use this method to return the last modified date and time for this search result.

Parameters

None.

Returns

A DateTime value.

GetScore method: SearchResult class

Syntax

```
GetScore()
```

Description

Use this method to return the search engine-specific score for this search result as an integer.

Parameters

None.

Returns

An integer.

GetSignature method: SearchResult class

Syntax

```
GetSignature()
```

Description

Use this method to return the search engine-computed signature for this search result as an integer. If the signature cannot be determined, this method returns -1.

The signature, content length, title, and other attributes are used to determine whether a search result is a duplicate.

Parameters

None.

Returns

An integer.

Related Topics

- [IsDuplicate method: SearchResult class](#)

GetSummary method: SearchResult class

Syntax

```
GetSummary()
```

Description

Use this method to return the summary for this search result as a string.

Parameters

None.

Returns

A string.

GetTitle method: SearchResult class

Syntax

```
GetTitle()
```

Description

Use this method to return the title for this search result as a string.

Parameters

None.

Returns

A string.

GetUrlLink method: SearchResult class

Syntax

```
GetUrlLink()
```

Description

Use this method to return the URL for this search result as a string.

Parameters

None.

Returns

A string.

HasDuplicate method: SearchResult class

Syntax

```
HasDuplicate()
```

Description

Use this method to return a Boolean value indicating whether this search result has duplicates.

Parameters

None.

Returns

A Boolean value: True if the search result has duplicates, False otherwise.

Related Topics

- [IsDuplicate method: SearchResult class](#)
- [MarkDuplicates property: SearchQuery class](#)

IsDuplicate method: SearchResult class

Syntax

```
IsDuplicate()
```

Description

Use this method to return a Boolean value indicating whether this search result is a duplicate. *Exact duplicates* and *near duplicates* are both marked as duplicates by the PeopleSoft Search Framework.

An exact duplicate is a document that satisfies *all* of the following conditions exactly:

- Same signature
- Same content length
- Same title

A near duplicate (a similar document) is a document that satisfies *any* of the following conditions:

- Same signature and documents are not empty.
- Same (non-null) title and same 4K checksum.
- Same (non-null) title and URLs differ by not more than one element (an element is a folder name and doesn't include the HTML/JSP page name of the HTTP GET parameters).

Parameters

None.

Returns

A Boolean value: True if this search result is a duplicate, False otherwise.

Related Topics

- [GetContentLength method: SearchResult class](#)
- [GetSignature method: SearchResult class](#)
- [GetTitle method: SearchResult class](#)
- [GetUrlLink method: SearchResult class](#)
- [HasDuplicate method: SearchResult class](#)

- [MarkDuplicates property: SearchQuery class](#)

SearchResultCollection Class

This section provides an overview of the SearchResultCollection class and discusses: SearchResultCollection class methods.

The SearchResultCollection class provides a collection of SearchResult objects. Because the SearchResultCollection class is a generic interface class, a search engine-specific subclass is required. A SearchResultCollection object is returned by the Execute method of the SearchQuery class.

Related Topics

- [Execute method: SearchQuery class](#)

SearchResultCollection Class Methods

In this section, the SearchResultCollection class methods are presented in alphabetical order.

First method: SearchResultCollection collection

Syntax

First()

Description

Use this method to return the first SearchResult object in the SearchResult collection. If the SearchResult collection is empty, it returns Null.

Parameters

None.

Returns

A SearchResult object if successful, Null otherwise.

Related Topics

- [SearchResult Class](#)
This section provides an overview of the SearchResult class and discusses: SearchResult class methods

GetDocumentCount method: SearchResultCollection collection

Syntax

GetDocumentCount()

Description

Use this method to return the actual number of SearchResult objects (documents) in the SearchResult collection.

Note

This is an abstract method.

Parameters

None.

Returns

An integer.

Related Topics

- [DocsRequested property: SearchQuery class](#)

GetDuplicatesMarked method: SearchResultCollection collection

Syntax

```
GetDuplicatesMarked()
```

Description

Use this method to return a Boolean value indicating whether duplicate items in the collection are marked as duplicates—that is, whether the search query was executed with MarkDuplicates set to true.

Note

This is an abstract method.

Parameters

None.

Returns

A Boolean value: True if duplicates were marked, False otherwise.

Related Topics

- [MarkDuplicates property: SearchQuery class](#)
- [IsDuplicate method: SearchResult class](#)

GetDuplicatesRemoved method: SearchResultCollection collection

Syntax

```
GetDuplicatesRemoved()
```

Description

Use this method to return a Boolean value indicating whether duplicate items in the collection were removed—that is, whether the search query was executed with RemoveDuplicates set to true.

Note

This is an abstract method.

Parameters

None.

Returns

A Boolean value: True if duplicates were removed, False otherwise.

Related Topics

- [RemoveDuplicates property: SearchQuery class](#)
- [IsDuplicate method: SearchResult class](#)

GetEstimatedHitCount method: SearchResultCollection collection

Syntax

```
GetEstimatedHitCount()
```

Description

Use this method to return the estimated hit count for the search query as an integer. The estimated hit count can be used as a device for fetching search results on demand rather than retrieving all of the search results initially.

Note

This is an abstract method.

Parameters

None.

Returns

An integer.

GetFacetNodes method: SearchResultCollection collection

Syntax

```
GetFacetNodes()
```

Description

Use this method to return an array of facet nodes available for this search result collection.

Parameters

None.

Returns

An array of FacetNode objects if successful, Null otherwise.

Related Topics

- [FacetNode Class](#)
This section provides an overview of the FacetNode class and discusses:

GetQueryObject method: SearchResultCollection collection

Syntax

```
GetQueryObject()
```

Description

Use this method to return the SearchQuery object that was used for the search.

Parameters

None.

Returns

A SearchQuery object.

Related Topics

- [SearchQuery Class](#)
This section provides an overview of the SearchQuery class and discusses:

GetQueryText method: SearchResultCollection collection

Syntax

```
GetQueryText()
```

Description

Use this method to return the search text that was used for the search query as a string.

Note

This is an abstract method.

Parameters

None.

Returns

A string.

Related Topics

- [QueryText property: SearchQuery class](#)

GetStartIndex method: SearchResultCollection collection

Syntax

```
GetStartIndex()
```

Description

Use this method to return the value of the *&start* parameter that was used to execute this search query.

Note

This is an abstract method.

Parameters

None.

Returns

An integer.

Related Topics

- [Execute method: SearchQuery class](#)
- [StartIndex property: SearchQuery class](#)

Item method: SearchResultCollection collection

Syntax

```
Item(index)
```

Description

Use this method to return the SearchResult object at the position in the SearchResult collection specified by the *index* parameter.

Parameters

Parameter	Description
<i>index</i>	Specifies the position of the SearchResult object in the SearchResult collection as an integer.

Returns

A SearchResult object if successful, Null otherwise.

Related Topics

- [SearchResult Class](#)
This section provides an overview of the SearchResult class and discusses: SearchResult class methods

Next method: SearchResultCollection collection

Syntax

Next()

Description

Use this method to return the next SearchResult object in the SearchResult collection. This method can only be invoked after a successful invocation of the First, Item, or Next methods.

Parameters

None.

Returns

A SearchResult object if successful, Null otherwise.

Related Topics

- [First method: SearchResultCollection collection](#)
- [Item method: SearchResultCollection collection](#)
- [SearchResult Class](#)
This section provides an overview of the SearchResult class and discusses: SearchResult class methods

SearchAuthnQueryFilter Class

This section provides an overview of the SearchAuthnQueryFilter class and discusses: SearchAuthnQueryFilter class methods.

The SearchAuthnQueryFilter class provides an abstract method to evaluate a list of values for a security attribute for a given search user. An application that requires document-level security in a searchable object must implement and extend the evaluateAttrValues abstract method.

SearchAuthnQueryFilter Class Methods

In this section, the SearchAuthnQueryFilter class methods are presented in alphabetical order.

evaluateAttrValues method: SearchAuthnQueryFilter class

Syntax

```
evaluateAttrValues(SBO_name, attr, user_ID)
```

Description

Use this method to return a list of values for a security attribute for a search user.

Note

This is an abstract method.

Parameters

Parameter	Description
<i>SBO_name</i>	Specifies a string representing a searchable object upon which the security attribute value needs to be evaluated
<i>attr</i>	Specifies a string representing the security attribute value as a document-level filtering attribute.
<i>user_ID</i>	Specifies user ID that executed the search query as a string.

Returns

An array of string.

Example

```
import PTSF_SECURITY:*;  
  
class UserPermission implements PTSF_SECURITY:SearchAuthnQueryFilter  
    method UserPermissionList();  
    method evaluateAttrValues(&sboName As string, &secAttr As string,  
&searchUser⇒  
    As string) Returns array of string;  
end-class;  
  
method UserPermissionList  
end-method;
```

```

method evaluateAttrValues
    /* &sboName as String, */
    /* &secAttr as String, */
    /* &searchUser as String */
    /* Returns Array of String */
    /* Extends/implements
PTSF_SECURITY:SearchAuthnQueryFilter.evaluateAttrValues */

    Local SQL &userPermissions_SQL;
    Local array of string &retvalues;
    Local string &isAdmin;
    &retvalues = CreateArrayRept("", 0);

    SQLExec("SELECT 'X' FROM PSROLEUSER WHERE ROLEUSER=:1 AND (ROLENAME=:2 OR⇒
    ROLENAME=:3)", &searchUser, "Portal Administrator", "PeopleSoft
Administrator",⇒
    &isAdmin);

    If All(&isAdmin) Then
        &retvalues = CreateArray("R:Admin");
    Else
        &retvalues.Push(""); /* Public */
        &retvalues.Push("1:" | &searchUser); /* Author */
        &userPermissions_SQL = CreateSQL("SELECT DISTINCT A.CLASSID FROM
PTSOLECLASS⇒
A, PSROLEUSER B, PSOPRDEFN C WHERE A.ROLENAME = B.ROLENAME AND C.OPRID ⇒
B.ROLEUSER AND C.OPRID = :1", &searchUser);
        Local string &classids;
        While &userPermissions_SQL.Fetch(&classids)
            &retvalues.Push(&classids);
        End-While;
    End-If;
    Return &retvalues;

end-method;

```

Additional Search Examples

This section provides additional code examples for the PeopleSoft Search Framework: Searching using facets.

Related Topics

- [Search Filter Generator Examples](#)
This section provides additional code examples for generating search filters using the SearchFilterGenerator class:

Searching Using Facets

The following provides an example of searching using facets.

```

import PT_SEARCH:*;

/* The following 3 lines are same for any implementation */

```



```

Local PT_SEARCH:SearchFactory &factory = create PT_SEARCH:SearchFactory();
Local PT_SEARCH:SearchQueryService &svc =
&factory.CreateQueryService("default");
Local PT_SEARCH:SearchQuery &qry = &svc.CreateQuery();

/* This is the keywords user is searching for; */
&qry.QueryText = "a";

/*
&qry.StartIndex , For the first request this is always 1
When using pagination to get the next set of results this can be changed to ⇒
DocsRequested + StartIndex ex: here 51 on next request is 101..
The maximum number of results that can come back is 200 which is configurable
⇒
the max results for this query can be fetched from SearchResultCollection ⇒
hit count
*/
&qry.StartIndex = 1;

/*
&qry.DocsRequested , Number of results to be returned by the search , It is ⇒
recommended to keep this default to 50 for performance reasons and show 10 ⇒
results per page and if the end user is requesting for 6th page request with ⇒
start index to 51;
*/
&qry.DocsRequested = 50;

/*
&qry.RemoveDuplicates ,&qry.MarkDuplicates Currently these two should always
be ⇒
set to false as our we generate unique id for every search document.
&qry.RemoveDuplicates = False;
*/
&qry.MarkDuplicates = False;
/*
This should be set to empty value to search in documents from all languages .
&qry.Language This can be provided a value to search in language specific
documents
Currently the frame work does not allow searching in selected languages , its
⇒
either all or one language
*/
&qry.Language = %Language_User;
/*
&qry.Categories , Array of categories on which the search can be performed on
If not specified we will search in all categories
*/
Local PT_SEARCH:SearchCategory &srchCat = create
PT_SEARCH:SearchCategory("MY_SRCH_⇒
CAT");
&qry.Categories = CreateArray(&srchCat);

/*
&qry.RequestedFields , Array of custom attribute values in the search result
Optional , if not specified all the standard information like URL , body ,
title ⇒

```

```

are still returned
*/
&qry.RequestedFields = &srchCat.GetRequestedFields();

/*
&qry.FacetFilters , Array of facets filter the search result by
Optional , If not specified No facets will be returned
Limitation : Only documents having this facet and path (If included) will be ⇒
returned in the search result.
FacetFilter constructor will take two arguments 1.Facet name , 2.Facet Path
FacetFilter is required when dealing with hierarchy facets Ex: Attribute
LOCATION ⇒
has COUNTRY/STATE/CITY
To filter results for country USA the request will be FacetName: LOCATION ,
Facet ⇒
Filter: USA
To filter results for country USA and State CA the request will be FacetName:
⇒
LOCATION , FacetFilter: USA/CA

&qry.FacetFilters = CreateArray(create PT_SEARCH:FacetFilter("SETID", ""));
&qry.FacetFilters.Push(create PT_SEARCH:FacetFilter("STATE", ""));
*/

&qry.FacetFilters = &srchCat.GetFacetFilters();

/*
The other optional facet request related query parameters that can be set
when ⇒
searching for facets
ReturnFacetValueCounts -- returns the counts only if this is set to true , ⇒
default is true , set this to false if we do not want to display counts.
MinumDocumentsPerFacetValue -- only return facet value whose document hit
count ⇒
is more that this , ex: only facets values which have hit count more than 5
or 1;
MaximumNumberOfFacetValues -- the children facets can be huge list , this
can ⇒
limit the return list
SortFacetValuesBy -- ALPHA_DES , ALPHA_ASC , COUNT_DES , COUNT_ASC
the max fetch returns the only top few children this can be used to provide ⇒
which top children to return
*/

/*
Execute the query and get back the results
*/
Local PT_SEARCH:SearchResultCollection &res = &qry.Execute(&qry.StartIndex, ⇒
&qry.DocsRequested);

/*
Find the number of results returned by the search , this will always be less
than ⇒
or equal to "&qry.DocsRequested"
*/
Local integer &resultSize = &res.GetDocumentCount();

```

```

/*
Find the number of potential results that can be returned;
This can be used to determine if we get the next set of results and how many =>
pages that can be shown to the user
*/
Local integer &estimatedResultCount = &res.GetEstimatedHitCount();

Local string &outHtml;

/*
FacetNode will have the facet values and the hit count for the results
GetFacetNodes will return array of the facet nodes in the result
*/
Local array of PT_SEARCH:FacetNode &facetNodes = &res.GetFacetNodes();

/*
Facet Node has various information which can be retrieved.
&facetNodes [&i].DocumentCount will return hit count
&facetNodes [&j].FacetValue , is the facet value before translation
&facetNodes [&i].DisplayValue , translated facet value
&facetNodes [&i].Path , to which the facet value belongs to
&facetNodes [&i].getChildNodes() will return child facet nodes and will have
all =>
above properties
*/

/*
loop through facet nodes and there children and render it in the UI
*/
If &facetNodes <> Null And
    &facetNodes.Len <> 0 Then
        &outHtml = &outHtml | "<table border='1'><tr><th>Name</th><th>Value=>
</th><th>DisplayValue</th><th>DocCount</th><th>Path</th><th></th></tr>";
        For &i = 1 To &facetNodes.Len
            &outHtml = &outHtml | "<tr><td>" | &facetNodes [&i].FacetName | "</td>=>
<td>" | &facetNodes [&i].FacetValue | "</td><td>";
            &outHtml = &outHtml | &facetNodes [&i].DisplayValue | "</td><td>";
            &outHtml = &outHtml | &facetNodes [&i].DocumentCount | "</td><td>" | =>
&facetNodes [&i].Path | "</td></tr>";
            If &facetNodes [&i].HasChildren Then
                &outHtml = &outHtml | "<tr><th>Child</th><th>Name</th><th>Value=>
</th><th>DisplayValue</th><th>DocCount</th><th>Path</th></tr>";
                Local array of PT_SEARCH:FacetNode &childFacetNodes = &facetNodes =>
[&i].getChildNodes();
                For &j = 1 To &childFacetNodes.Len
                    &outHtml = &outHtml | "<tr><td></td><td>" | &childFacetNodes =>
[&j].FacetName | "</td><td>" | &childFacetNodes [&j].FacetValue;
                    &outHtml = &outHtml | "</td><td>" | &childFacetNodes
[&j].DisplayValue;
                    &outHtml = &outHtml | "</td><td>" | &childFacetNodes [&j].=>
DocumentCount | "</td><td>" | &childFacetNodes [&j].Path | "</td></tr>";
                End-For;
            End-If;
        End-For;
        &outHtml = &outHtml | "</table>";
    Else

```

```

        &outHtml = &outHtml | "<br><bold>No Facet Nodes</bold>";
    End-If;
    /*
    &res.Item(&i) returns a PT_SEARCH:SearchResult for each search result
    document ⇒
    which has various information which can be retrieved for display purposes
    &srchResult.GetUrlLink , returns the URL which can take the user to the ⇒
    transaction page
    &srchResult.GetTitle , returns the Title for the search result document
    &srchResult.GetSummary , returns the body for the search result document
    &srchResult.GetScore , returns the score for the search result document
    &srchResult.GetCategoryNames , returns the search categories this search
    result ⇒
    document belongs too
    &srchResult.GetCustomAttributes , will return a SearchFieldCollection which
    has ⇒
    custom search attribute values
    */

    /*
    loop through each result and render it in the UI
    */
    Local PT_SEARCH:SearchResult &srchResult;
    For &i = 1 To &resultSize
        &srchResult = &res.Item(&i);
        &outHtml = &outHtml | "<font size=""2""><hr/>Title: <a href="" " | ⇒
        &srchResult.GetUrlLink() | """">" | &srchResult.GetTitle() | "</a>";
        rem &outHtml= &outHtml| "";
        &outHtml = &outHtml | "<br>Summary: " | &srchResult.GetSummary();
        &outHtml = &outHtml | "<br>Score: " | &srchResult.GetScore();
        &outHtml = &outHtml | " Source Group: ";
        If Not &srchResult.GetCategoryNames() = Null Then
            For &j = 1 To &srchResult.GetCategoryNames().Len
                &outHtml = &outHtml | " " | &srchResult.GetCategoryNames()[&j];
            End-For;
        End-If;
        &outHtml = &outHtml | "<font size=""2"" color=#009933><br>Url: " | ⇒
        &srchResult.GetUrlLink() | "</font>";
        &outHtml = &outHtml | "<font size=""2"" color=#097054><br>Signature: " | ⇒
        &srchResult.GetSignature() | "</font>";
        &outHtml = &outHtml | "<font size=""2"" color=#097054> / Content Length: "
        ⇒
        | &srchResult.GetContentLength() | "</font>";
        &outHtml = &outHtml | "<font size=""2"" color=#097054> / Language: " | ⇒
        &srchResult.GetLanguage() | "</font>";
        &outHtml = &outHtml | "<font size=""2"" color=#000000><br>Last Modified: "
        ⇒
        | &srchResult.GetLastModified() | "</font>";
        Local PT_SEARCH:SearchFieldCollection &customs = &srchResult.⇒
        GetCustomAttributes();
        If (&customs <> Null) Then
            For &j = 1 To &customs.Count()
                &outHtml = &outHtml | "<br>" | &customs.Item(&j).Name | "=" | ⇒
                &customs.Item(&j).Value;
            End-For;
        End-If;
    End-For;
End-If;

```

```
        &outHtml = &outHtml | "</font>";  
End-For;  
&outHtml = &outHtml | "</BODY></HTML>";
```

Portal Registry Classes

Understanding the Portal Registry

The portal registry is a tree structure in which content for a portal is organized, classified, and registered. The portal registry classes (API) are used to update the portal registry. The Portal Administration pages provide a GUI access to the portal registry API. You can also access them using a PeopleCode program you write yourself. How you access the portal registry depends on the type of updates required. Your organization will likely use both methods of updating the portal registry. This topic focuses on accessing the portal registry classes using PeopleCode.

A portal is a website that helps you navigate to other web-based applications and content. The PeopleSoft Portal is a *business portal*. It is similar to general purpose portals, except that its main purpose is to help end-users be more effective in accessing information to perform their jobs.

Each PeopleSoft Portal is defined by one PeopleSoft portal registry. The PeopleSoft portal registry consists of a number of system tables and associated data in a PeopleSoft database. The portal registry must reside within one PeopleSoft database. There can be more than one portal registry in a PeopleSoft database, but only one portal registry is associated with a PeopleSoft Portal.

The portal registry consists of the following primary parts:

- Folders
- Content references
- Nodes

Folders and content references make up the majority of the portal registry, and provide a hierarchical tree structure to describe various content that is *registered* as part of a PeopleSoft portal.

Nodes provide a logical name to a specific webserver and database, so content can be registered independent of specific webserver. It is used when the portal servlet attempts to retrieve content—both internal PeopleSoft content as well as external content—and to assemble pages.

The primary function of the portal is to take a target URL (generally a URL for a PeopleSoft component) that comes in from a user's browser, and assemble a page with that content and any other content. The layout and what content to assemble on the page is defined by the *node template*, which is composed of HTML. The portal attempts to find the content reference associated (that is, registered) with the target URL to get the template, or uses a series of default templates if it cannot get the template from a content reference.

Folders

Folders are how a hierarchical structure is created within a portal registry. Each folder has a parent, except the root folder, which is the top-level folder in a portal registry. Each folder can also contain child folders and content references. Folders are roughly analogous to directories

within a file system. A folder can be further defined by a number of attributes (description, security, when it expires, and so on) that are useful within the portal environment.

Related Topics

- [Adding a Folder](#)

The following example checks to see if a folder for a user exists. If it doesn't, it creates one.

Content References

A content reference is simply a reference to a URL. After you create an entry for a content reference in the portal registry, it's considered registered. A content reference can be further defined by a number of attributes (description, security, when it expires, and so on) that are useful within the portal environment.

There are a number of distinct types of content references that can be broken down into the following broad categories:

- Target
- Template
- Component

A *target* type of content reference describes a registered URL that a user might reference. Typically, these would be a PeopleSoft Pure Internet Architecture component, such as a page in a transaction. When a user references a URL, the URL is looked up in the registry to find the target content reference.

A *template* type of content reference describes what, if any, other content to put on the page, and where to place that content. The portal attempts to find a template for every URL that is requested.

A *component* type of content reference describes a component that is typically placed on a target page or homepage.

Related Topics

- [ContentReference Links](#)

A content reference link is a ContentReference object that delegates most of its properties to another content reference. It has its own separate properties, as well as a reference to the linked cref.

Nodes

When a content reference is created to register some content (that is, a URL) the specific URI (that is, the scheme, Web server, and so on) can be specified in the content reference. However, this has the drawback that every time the URI for a content reference changes (the Web server name changes, and so on), the content reference must be changed. Nodes are a way to create a logical name for a specific Web server, scheme, and so on. When the content reference is created you can specify a node name.

For example, suppose the name of a Web server changed. If you don't use nodes, you must check all your content references and change them accordingly. If you use nodes, you have to change only the Web server name in one place, and all the content references that use that node now automatically reference the correct Web server.

Nodes can be optional for content where the specified URL is already a complete URL, such as for external content. Nodes can be categorized as:

- default local
- local
- non-local (remote)

Related Topics

- [Using Attributes](#)

The following example uses attributes for a folder to determine what is displayed to an end-user. The end-user still has access to the content, however, it isn't displayed. This program doesn't discuss how to hide or display content: it just shows the function used to determine if a folder should be displayed.

Security

The same security mechanism is used for folders, content references, content reference links, tab definitions, pagelets, and user homepages. All of these items can be marked as public, owner accessible, or can have explicit PeopleSoft permission values set, including cascading the permissions to its child objects (that is, the child objects have the same permissions as the parent objects, when applicable.)

When marked as public, the item is accessible by any user. Public access cannot be cascaded, that is, passed down, to child objects.

When marked as owner accessible, an item is accessible only by the same user that created that item. Owner accessible cannot be cascaded, that is, passed down, to child objects.

Items can be marked as accessible by PeopleSoft permissions. This means that if a user is a member of a role, and the role contains the permission list that the item is also associated with, the user has access to that item. Additionally, when applied to folder permissions the permission can be cascaded. This means that any child of that folder, including a content reference, automatically has that permission added to its permission list.

Role-based security can be applied to the portal objects (folders, content references and content reference links) using the RolePermissions collection.

Note

You can only use role-based security for content references, folders, and content reference links that are not components or iScripts.

You can specify which roles are allowed to access the objects. This works similarly to permission lists. If a user has a specified role, authorization is granted.

A role collection is the same as the PermissionValue collection, though there are additional properties on PermissionValue.

Attributes

Folders, content references, content reference links, PageletCategory objects, and Pagelets can have any number of attributes added to them. Attributes are simply name/value pairs. These name/value pairs are defined and used by many portal-aware applications, such as the search engine, navigational display, and so on.

See [Using Attributes](#).

Additional Portal Objects

Using the PortalRegistry, you can also add and customize other items in your portal, such as tabs, homepages, and favorites.

The TabDefinition is a homepage tab that has been defined to the portal. It is what an administrator creates when they want to define a new homepage tab. The TabDefinition is based on content references.

The User Homepage is a personalized homepage for a user. It contains all the tabs and pagelets the user has selected for their homepage. The User Homepage is based on folders.

A Favorite represents a content reference that the user wants to keep a shortcut to. It contains the name of the content reference, and the label the user wants displayed for this favorite.

A Pagelets is an area on a page that contains content, and the template used to specify the style for that content. Pagelets are a type of content reference.

Using the Portal Registry API

The portal registry API provides the entry point to a specific portal registry. Common administrative tasks include adding, deleting, and renaming the registry objects (that is, folders, content references, tabs, and so on.) Additionally, there are many properties associated with every registry object, and all of these properties can be accessed and modified.

You can use the portal registry API in batch mode to make many changes to a portal at once. For example, suppose something changed in your security system. You could write your own PeopleCode program, using the portal registry classes, in an Application Engine program and change the access for all your users at once.

You can also use the portal registry API to exchange data with an external system. For example, suppose an external merchant had an area on your company's portal, and the information there must be updated. One way to do this is for the merchant to use an Application Message to send the data to your system, then a subscription program would update the portal using the portal registry API.

Each PortalRegistry object represents one specific PortalRegistry in a system. An empty PortalRegistry object is initially gotten from the PeopleSoft Session object. You can then open an existing PortalRegistry to view or change existing content, create a new PortalRegistry, or delete an existing PortalRegistry.

Using Security

The PermissionValue collection associated with a folder, content reference, and so on, as well as specific properties on the object, work together to form the security for an object. This section discusses how these attributes work together to determine access to a portal registry object.

Portal Registry Object Properties

Together with the PermissionValue collection, the following two properties determine access to a portal registry object:

- AuthorAccess
- PublicAccess

The `AuthorAccess` property determines whether the author of the object has access to the object.

The `PublicAccess` property determines whether the object is generally accessible or not. If this property is set to `True`, all users have access to the object.

These properties apply only to an object. They *cannot* be cascaded, that is, passed down to child objects.

The other object property used with security, the `Authorized` property, indicates whether a user is authorized to access an object. The value of this property depends on whether the user has access.

Accessing Portal Registry Objects

When you get a folder, content reference, content reference link, `PageletCategory` or `Pagelet` collection, only the items that the end-user is authorized to access are in the collection. Whether an object is contained in a collection is based on the following algorithm:

- If the object is marked as `PublicAccess` it is automatically accessible.
- If the object is marked as `AuthorAccess` and the current `UserId` is the `Author` it is accessible.
- If the current user is in a permission list (class) that is in the `Permissions` collection for that object.
- If the current user is in a permission list (class) that is in the `CascadedPermissions` collection for that object.
- If the current user has the Portal Administrator role.

When you access a content reference or folder using a valid name and one of the `Find` methods (`FindCRefByURL`, `FindCRefByName`, `FindCRefForURL`, or `FindFolderByName`) a content reference or folder is returned whether the user is authorized to it. When you use these methods, always check the `Authorized` property. This is the only property you can view from an object that an end-user isn't authorized to.

In addition, if you know the specific URL for a tab, you could specify that in the `FindCRefByURL`. The tab is returned whether the user is authorized to it, so you should always check the `Authorized` property.

Using `PermissionValue`, `RolePermissionValue`, Cascading Permissions and `CascadingRolePermissions`

To set non role-based permissions for a folder, content reference, content reference link, `PageletCategory` object, or `Pagelet`, you must access the `PermissionValue` collection for that object using the `Permissions` property. The `PermissionValue` objects refer to permission list values that already exist on the system, such as `ALLPANLS`, `CUSTOMER`, `EMPLOYEE`, and so on.

To set role-based permissions for a folder, content reference, or a content reference link that are not component or `iScript`, you must access the `RolePermissionValue` collection for that object using the `RolePermissions` property. The `PermissionValue` objects refer to role-based permission values that already exist on the system.

Note

The PORTAL_PAGELETS folder is the parent folder for all PageletCategories. Its security is set to public. PeopleSoft does not recommend cascading any permissions from this folder object. Cascade permissions only from the pagelet category (folder).

Both the PermissionValue collection and the RolePermissionValue collection return PermissionValue objects. Use the PermType property to determine whether a particular PermissionValue is role-based or not.

For every PermissionValue object, you can chose whether all the child folders and content references of this folder have the same permissions. This is called *cascading*. You cascade permissions by setting the Cascade property to True.

There are two types of PermissionList collections you can access. One is returned by the Permissions and RolePermissions properties, the other by the CascadedPermissions and CascadedRolePermissions properties.

Permissions and RolePermissions

The Permissions and RolePermissions properties return a collection containing the permissions set at the current level, that is, set with that folder or content reference. You can add PermissionValues to this list. Use the Cascade property to cascade the permission you add to child folders and content references.

Note

Folders can contain other folders, but the other objects that use the Permissions property can't contain themselves, that is, content references can't contain other content references, and so on. Therefore, the Cascade property is applicable only to folders, not to any other object.

CascadedPermissions and CascadedRolePermissions

The CascadedPermissions and CascadedRolePermissions properties return the a collection for *all* the permissions for an object. It contains any permission list values set in any parent folder.

Note

You *cannot* add any PermissionValues to a collection returned by the CascadedPermissions or CascadedRolePermissions property. You can add values only to the collection returned by the Permissions or RolePermissions property.

You can add PermissionValues for a child folder, but you *cannot* delete any of the existing ones that are cascaded. Permissions are augmented, not overwritten, that is, the permissions are the sum of both the parent permissions and whatever is set at the current level.


Therefore, keep the following in mind when working with PermissionValues:

- Set permissions only at the level where they're needed.

- Cascade permissions only when necessary.
- Generally, don't set cascaded PermissionValues for the root folder.
- Only the values in a PermissionValue object cascade. Properties on the folder itself (such as PublicAccess or AuthorAccess) do *not* cascade.

For example, suppose your PortalRegistry had the following hierarchy:

The following diagram illustrates PortalRegistry hierarchy example:

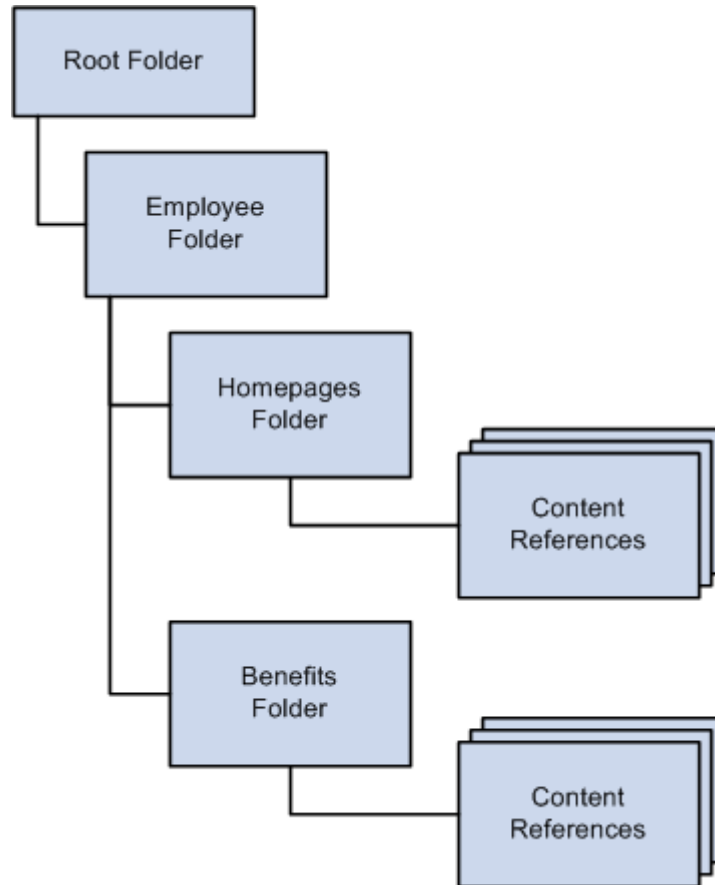

The following permission list values are assigned to the PermissionValue objects for the Employees folder, and both of them are cascaded:

- EMPLOYEE
- MANAGER

The Homepages and Benefits folders have the exact same permissions as the Employees folder, that is, all users associated with these two permission lists have access to these folders.

Suppose you decide that you don't want the permission list EMPLOYEE to access the Benefits folder. If you delete the EMPLOYEE PermissionValue from the Benefits PermissionValue collection, you have *not* altered the permissions. The permissions set at the parent folder, that is, at the Employees folder, can't be deleted, they can only be added to.

To make this change, you must:

- Change the Cascaded property for the EMPLOYEES PermissionValue in the Employees folder to False

- Add EMPLOYEES as a PermissionValue object to the Homepages folder.

Related Topics

- [Cascade property: PermissionValue class](#)
- [Setting Permissions Using the PermissionValue Object](#)
The following code example adds permissions for a folder through the PermissionValue object.
- Security Administration: Understanding Permission Lists

Working With ValidFrom and ValidTo

Folders, content references, content reference links, and tab definitions have both ValidFrom and ValidTo dates. What's the difference and how are they used in the portal registry API?

- A ValidFrom date is when something begins.
- A ValidTo date is when something ends.

For example, suppose your HR department has a page describing the benefits for your employees, and that page changed every calendar year. This means the page for the year 2000 has a ValidFrom date of 01/01/2000 and a ValidTo date of 12/31/2000. The benefits page for the year 2001 has a ValidFrom date of 01/01/2001 and a ValidTo date of 12/31/2001.

Folders, content references, content reference links and tab definitions are returned in their collections regardless of the ValidTo and ValidFrom dates. You must take these dates into account and only display to the end-user those values that should be seen.

In addition, a ValidFrom should always come *before* a ValidTo date. If they are set incorrectly, you receive a runtime error.

For all newly created folders, content references, content reference links and tab definitions, the default value for both these properties is Null (""), that is, they begin immediately and do not expire.

In addition, you can also check the IsVisible property to see if a portal object is viewable. IsVisible verifies if an object is Hidden, as well as if the ValidTo and ValidFrom dates are within the specified dates.

Doing Error Handling

All errors for the portal registry classes, like the other APIs, are logged in the PSMessages collection, instantiated from a session object.

The portal registry classes log errors that occur with methods immediately, and errors that occur with properties only after a method is executed.

For example, suppose you specified an invalid name when you were trying to delete a folder. The method (DeleteItem) returns False, and the error is logged in the PSMessages collection immediately.

Now suppose you created a new folder, and specified an invalid ValidTo date. The error won't be logged in the PSMessages collection until you tried to save your changes.

When you want to check for errors depends on your application. When users are entering data dynamically, and your program is registering their data in the portal, you may want to check for errors often. If you're using a batch program, you may want to check for errors only after the Open, Save, Insert, and Delete methods.

Most methods return a Boolean value indicating success or failure. After the failure of a method, you may want to check the PSMessages collection to determine the exact error.

```
Local ApiObject &MySession;
Local ApiObject &ErrorCol;
Local ApiObject &FolderCol, &Folder, &Registry;
Local Boolean &Open; /* Access the current session */

&MySession = %Session;
If &MySession Then
    /* connection is good */

    &Registry = &MySession.GetRegistry();

    &Open = &Registry.Open("CUSTOMER");

    If &Open Then
        /* Registry opened successfully */
        /* do processing */
    Else
        /* Do error checking */
        &ErrorCol = &MySession.PSMessages;
        For &I = 1 to &ErrorCol.Count
            /* do processing */
        End-For;

        End-If;
    Else
        /* do processing for no connection */
    End-If;
```

Related Topics

- [Error Handling](#)
The session object handles error processing for all the APIs, such as Component Interfaces, the Query API, and so on. From the session object, you can check if there have been any errors.

Understanding the Life Cycle of a PortalRegistry Object

At runtime, there are certain things you want to do with a PortalRegistry object, like getting an instance of it, adding tabs, editing content references, and so on. The following is an overview of this process. These steps are expanded in other sections.

1. Perform one of these steps.
 - a. Execute the GetPortalRegistry method on the PeopleSoft session object to get a PortalRegistry object, or
 - b. Use the FindPortalRegistries method on a session object to get a collection of all PortalRegistries. Select a PortalRegistry from the collection.
2. Open the PortalRegistry, using the portal name.
3. After you have an open PortalRegistry object, you can do various actions such as:
 - Add content references to the existing folders.

- Add folders and the content references for them.
 - Add or change Nodes.
 - Modify the PortalRegistry properties.
 - Modify the existing content references, folders, tabs, homepages, and so on.
4. After you make your changes, you must save your work. The Save method must be executed at the appropriate level, such as at the folder level for changes to a folder, at the PortalRegistry level for changes to the default template, and so on.

A property value change isn't committed to the database until the parent object is saved.

Some methods commit data to the database only when the parent object is saved. However, other methods cause data to be committed to the database as soon as they are executed, like DeleteItem on a folder. Methods that automatically make database changes are noted as such in their description.


See [Saving Content Considerations](#).

5. When you finish all operations for a PortalRegistry, close the object.

Note

PeopleSoft recommends that you open and close every PortalRegistry in a single PeopleCode event. You shouldn't open a PortalRegistry object and keep it open across multiple events. You should also keep only one PortalRegistry object open at a time.

The following diagram provides an understanding of the Life Cycle of a PortalRegistry Object.

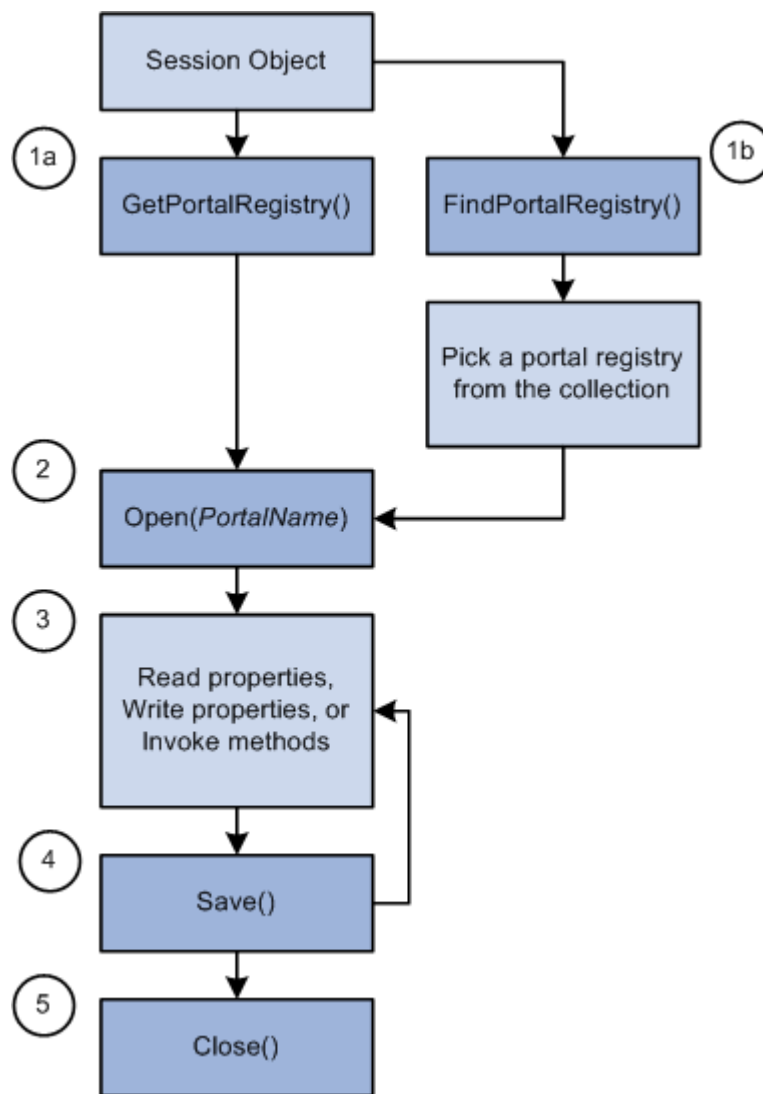

Examples of using the PortalRegistry objects are provided at the end of this topic.

Related Topics

- [Portal Registry Classes Example](#)

There are several actions you may want to perform using a PortalRegistry, such as adding a folder, changing permissions, and so on. The following examples discuss the most common tasks. In addition, there are example programs of accessing the PortalRegistry classes using language environments other than PeopleCode.

Using Content References

Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

UsageType

This is the primary specifier for the type of content reference. There are a number of different types of content references, but all content references can be categorized into the following major types:

- Target
- Template
- Portal Component

Target


The *target* is the page referenced by a URL in the user's browser. This is the main transaction or page that the user wants, and the portal may place other content around this target page based on the template. The template describes any other content, and where to place it, on the page. The template is either gotten from the content reference or a set of default templates.

Content reference links can only be created for content references that have a type of target.

Template

A portal *template* defines how the portal creates a user's page. It's an HTML document that describes the content and where the content is placed. The template specifies one target and zero or more portal components.

The portal template in the following example is comprised of four separate template components: one for the navigation and search header, one for related links, one for the target content region, and one for the overall template which specifies where the other components should be placed. At runtime, the target content region would be filled by the HTML returned by the target page, as would the other template component regions.

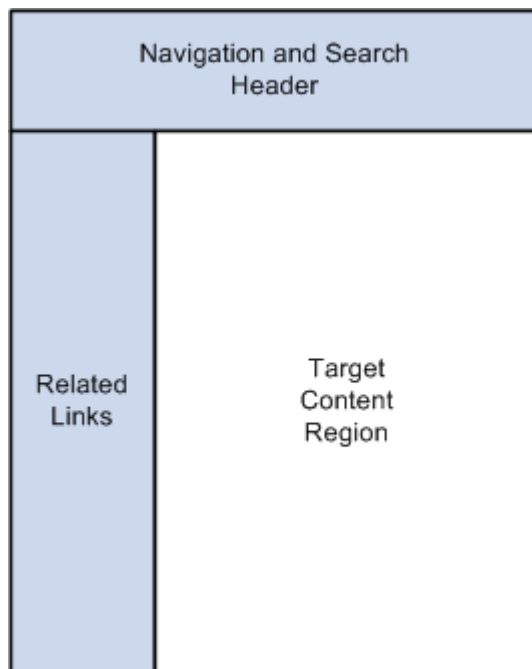

See Portal Technology: Portal Templates and Template Pagelets.

Portal Component

A *portal component* is an HTML document, or something that produces an HTML document. The portal component must be defined within a template.

A portal component could be one of a Homepage tab, component reference, or Homepage Pagelet.

UsageType Values

The following table matches the general types of target, template, and portal component to the actual values of the UsageType property.

General Type	UsageType Value
Target	Target (TARG)
Template	Frame template (FRMT) or HTML template (HTMT)
Pagelet	Pagelet (HPGC)
Homepage Tab	Homepage Tab (HPGT)

More specifically:

- A UsageType value of TARG specifies a content reference that is a target.
- A UsageType value of FRMT specifies a content reference that is an HTML frame template.
- A UsageType value of HTMT specifies a content reference that is an HTML template.
- A UsageType value of HPGC specifies a content reference that is a PeopleSoft homepage component (pagelet).
- A UsageType value of HPGT specifies a Homepage tab.
- A UsageType value of LINK specifies a content reference link.

TemplateType

This property is valid only when the UsageType property is a target. For target type content references (TARG) this controls whether the portal looks for and uses a template to wrap the target.

TemplateType	Meaning
NONE	There is no template for this target
HTML	There is some kind of HTML template for this target

URLType

This property gives information about what format the URL is in.

URLType Value	Meaning
UEXT	URL points to a non-PeopleSoft (external) URL

URLType Value	Meaning
UMPG	URL points to a PeopleSoft mobile page
UPGE	URL points to a component
UPHP	URL points to a homepage tab
UPTM	URL points to a template
USCR	URL points to an iScript
UGEN	URL points to a generic PeopleSoft URL.

The URL property is always required (it's one of the parameters for the InsertItem method.) The format of this parameter (or property) depends on the other properties.

Related Topics

- Portal Technology: Portal Technology Overview

Nodes and URL

Nodes and the URL property work together and are interrelated. The node is how to 'register' a logical name for a Web server (the Web server name, on the servlet, and so on) not the actual details. This way, content references don't change when a Web server changes.

For example, suppose you had content that you referenced on the HRMS Web server. However, the machine name for that server changed. You can change the URI of the Node, instead of changing every content reference that referred to that content.

At least one node must be specified as the default local node. Nodes are also required for PeopleSoft components and iScripts.

Considerations When Using Nodes and the URL Property

When a content reference is created it is 'registered' with its URL (the portal, and others, typically find a content reference by its URL). The node is used to create a logical name for the Web server, servlet, and so on, so these details are not included in a content reference's URL. When details of a Web server change, such as at installation time, only the URI for the content provider must change. You don't have to change the URL for any content references.

When the node is specified, the content provider's URI is concatenated with the URL property.

The format of the URL property depends on the content it's pointing to.

Summary

The following table summarizes the interrelations between the different content reference properties.

UsageType	TemplateType	StorageType	URLType
Target (TARG)	HTML	Remote (RMTE)	Component (UPGE)
Target (TARG)	HTML	Remote (RMTE)	Internet Script (USCR)
Target (TARG)	HTML	Remote (RMTE)	External (UEXT)
Target (TARG)	NONE	Remote (RMTE)	Component (UPGE)
Target (TARG)	NONE	Remote (RMTE)	Internet Script (USCR)
Target (TARG)	NONE	Remote (RMTE)	External (UEXT)

UsageType	TemplateType	StorageType	URLType
Frame template (FRMT), HTMP template	NONE	Remote (RMTE)	Internet Script (USCR)
Frame template (FRMT), HTMP template	NONE	Local (LOCL)	N/A
Homepage (HPGT)	NONE	Local (LOCL)	N/A
Template component (TMPC), Homepage component (HPGC)	N/A	Remote (RMTE)	Component (UPGE)
Template component (TMPC), Homepage component (HPGC)	N/A	Remote (RMTE)	Internet Script (USCR)
Template component (TMPC), Homepage component (HPGC)	N/A	Remote (RMTE)	External (UEXT)
Template component (TMPC), Homepage component (HPGC)	N/A	Local (LOCL)	N/A

Naming Conventions

If you create two content references or with the exact same URL, the second one fails.

For example, suppose you create an external content reference with a URL of `www.example.com`. Then you create a second content reference that has a node of PeopleSoft, whose URI is `www.example.com`. The creation of the second content reference fails because the URL already exists.

If you have multiple nodes with the same URI, `FindCRefByURL` looks for the specified content reference with all those nodes.

If you have multiple nodes with the same URI, but no registered content references, the system uses the template from the alphabetically first node it finds.

Pagelet, node, and portal registry names can consist of any combination of letters, digits and underscores, but they must not contain any spaces or begin with a digit.

Content reference link names cannot have start with numbers, and can not have special characters and spaces.

Deleting Content Considerations

Be extremely careful when you delete any content. There may be more than one object relying on the content you delete.

- If you try to delete a template currently used by a content reference, the node template is set as the default template for the portal, you receive an error when you try to save the item.
- If you delete a homepage template for a user, the system tries to use the default user's template first, before resorting to the portal default template.

- If you try to delete a content provider that is currently used by a content reference, you receive an error and cannot save the PortalRegistry object.

 Warning

If you delete a folder, you delete *all* content in the folder. If you delete a folder that contains other folders, that is, a parent folder, all the child folders, and all the content references are deleted. If you delete a PortalRegistry, you delete *everything*. Your entire PortalRegistry is gone, all the folders, content references, templates, and so on. Do not delete a PortalRegistry object unless you are absolutely certain you want to.

Saving Content Considerations

The following portal registry classes have Save methods:

- PortalRegistry
- Folder
- Content reference
- Content reference links
- TabDefinition
- PageletCategory
- Pagelet
- Homepage
- Favorites collection

This means if you change a folder, you must save the folder. If you change a folder and only save at the PortalRegistry level, your changes are *not* saved.

Some classes do *not* have a Save method. For these classes, you must save the parent object.

- If you change a node, node template, or remote portal, you must use the PortalRegistry Save method.
- If you change an AttributeValue you must use the Save method with the item that contains the AttributeValue (folder, content reference, PageletCategory, or Pagelet).
- If you change a PermissionValue, you must use the Save method with the item that contains the PermissionValue (folder, content reference, PageletCategory or Pagelet).
- If you change a UserTab or a SelectedPagelet, you must use the Homepage Save method.

Data Type of a PortalRegistry Object

PortalRegistry objects, and all objects instantiated from a PortalRegistry object, are declared as data type ApiObject. For example,

```
Local ApiObject &MyRegistry;
```

```
Local ApiObject &MyFolder, &MyAttributeValue;
```

Note

PortalRegistry objects can only be declared as Local.

Considerations Using Local Variables

When a local variable has a reference to an object and the end-user clicks the Back button on a browser, the local variable is set to NULL. This is always logged in the trace file.

Considerations Using Global Variables

Global variables are not available to a portal or applications on separate databases. They are available only on applications and Portals in the *same* database.

Scope of a PortalRegistry Object

A PortalRegistry object can be instantiated from the following language environments:

- PeopleCode
- C/C++
- Java

Related Topics

- [Portal Registry Classes Example](#)

There are several actions you may want to perform using a PortalRegistry, such as adding a folder, changing permissions, and so on. The following examples discuss the most common tasks. In addition, there are example programs of accessing the PortalRegistry classes using language environments other than PeopleCode.

PortalRegistry Reference

The following sections provide more detail of the properties, methods, and other objects that you can use with a PortalRegistry object. If you don't want to programmatically change a portal registry, you can use the Portal Administration Tool pages instead.

Session Class Methods

PortalRegistry objects don't have any built-in functions. They are instantiated from a session object. In this section, we discuss the Session Object methods. The methods are listed in alphabetical order.

Related Topics

- PeopleCode Language Reference: GetSession function
- PeopleCode Language Reference: %Session system variable

FindPortalRegistries method: Session class

Syntax

```
FindPortalRegistries(Name)
```

Description

The FindPortalRegistries method returns a reference to a PortalRegistry Collection filled with zero or more PortalRegistry objects matching the *Name* parameter. The *Name* parameter takes a string value.

You can use a partial key to get a smaller subset of the PortalRegistry collection. For example, to get a collection of all the PortalRegistry objects whose names start with the letter "B", specify just the letter B for *Name*:

```
&MyColl = &MySession.FindPortalRegistries("B");
```

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the PortalRegistry object to find. This parameter takes a string value.

Returns

A PortalRegistry Collection object.

Example

The following example returns a collection with references to all PortalRegistry objects.

```
Local ApiObject &MySession;  
Local ApiObject &MyColl;  
  
&MySession = %Session;  
&MyColl = &MySession.FindPortalRegistries("");
```

GetActualRemoteNodes method: Session class

Syntax

```
GetActualRemoteNodes()
```

Description

Use the GetActualRemoteNodes method to return a collection of remote nodes for the session.

Note

This method will only return remote nodes.

Parameters

None.

Returns

A reference to a collection of remote nodes if successful, null otherwise.

Example

```
&remoteNodeColl = %Session.GetActualRemoteNodes();
```

Related Topics

- [RemoteNode Collection](#)
A remote node collection contains a set of references to all the nodes defined in the database, both local and remote.

GetLocalNode method: Session class

Syntax

```
GetLocalNode()
```

Description

Use the GetLocalNode method to return a reference to the node defined as the local node for this session.

Parameters

None.

Returns

A reference to a node object if successful, Null otherwise.

Example

```
&Node = %Session.GetLocalNode();
```

Related Topics

- [Node Class](#)
The node indicates the URI of the content server. If the node is a PeopleSoft content server, it has a PeopleSoft server URI. If the node has external content, the URI indicates the external content.

GetNodes method: Session class

Syntax

```
GetNodes()
```

Description

Use the GetNodes method to return a collection of both local and remote nodes for the session.

Parameters

None.

Returns

A reference to a collection of nodes if successful, Null otherwise.

Example

```
&NodeColl = %Session.GetNodes();
```

Related Topics

- [Node Collection](#)
A node collection contains a set of references to all nodes defined in the database.

GetPortalRegistry method: Session class

Syntax

```
GetPortalRegistry()
```

Description

The GetPortalRegistry method returns an empty PortalRegistry object. You can then open or delete an existing PortalRegistry, or create a new one.

Parameters

None.

Returns

An empty PortalRegistry object.

Example

```
Local ApiObject &MyPortal;  
  
&MyPortal = %Session.GetPortalRegistry();  
&PORTAL_NAME = %Request.GetParameter("PORTAL_NAME");  
&Portal.Open(PORTAL_NAME);
```

GetRemoteNodes method: Session class

Syntax

```
GetRemoteNodes()
```

Description

Use the GetRemoteNodes method to return a collection of nodes for the session.

Note

This method returns both local and remote nodes.

Parameters

None.

Returns

A reference to a collection of nodes if successful, Null otherwise.

Example

```
&NodeColl = %Session.GetNodes();
```

Related Topics

- [RemoteNode Collection](#)
A remote node collection contains a set of references to all the nodes defined in the database, both local and remote.

PortalRegistry Class

A PortalRegistry object is returned from:

- The GetPortalRegistry session method.
- The PortalRegistry Collection Methods First, ItemByName, or Next.

Note

In addition to the following methods, the PortalRegistry class has methods used with the search API.

Related Topics

- [GetPortalRegistry method: Session class](#)

- [PortalRegistry Collection Methods](#)
In this section, we discuss the PortalRegistry collection methods. The methods are discussed in alphabetical order.
- [Changing PortalRegistry Properties](#)
This example shows how to change the default template used by a PortalRegistry. The following is the complete code sample: the steps explain each line.

PortalRegistry Class Methods

In this section, we discuss the PortalRegistry class methods. The methods are discussed in alphabetical order.

Close method: PortalRegistry class

Syntax

```
Close()
```

Description

The Close method closes the PortalRegistry object, that is, this method sets the object to the state it was in immediately after the GetPortalRegistry was done on the PeopleSoft Session object. Any unsaved changes are discarded. The Close method can be used only on an open PortalRegistry, not a closed one. This means you must have opened the PortalRegistry with the Open method before you can close it.

Parameters

None.

Returns

A Boolean value: True if the PortalRegistry object is successfully closed, False otherwise.

Example

```
&Rslt = &MyRegistry.Close();  
  
If Not &Rslt Then  
    /* registry not closed - do error processing */  
End-if;
```

Related Topics

- [Open method: PortalRegistry class](#)
- [Save method: PortalRegistry class](#)

CopyObject method: PortalRegistry class

Syntax

```
CopyObject(sourcePortalName, sourceRefType, sourceObjName, targetPortalName,  
targetPrntFldrName, copyChildren)
```

Description

Use the CopyObject method to copy folders and content references between portal registries.

If the object being copied has related HTML, the HTML is also copied and named according to the current portal naming convention for HTML objects, which is:

PR_<portalname>_<objectname>

where <portalname> is up to the first 8 characters of the portal name and <objectname> is up to the first 17 characters of the object name.

Parameters

Parameter	Description
<i>sourcePortalName</i>	Specify the name of the portal from which the object is to be copied.
<i>sourceRefType</i>	Specify the type of object to be copied. Values are: • "C" for content references • "F" for folders This parameter is case-sensitive.
<i>sourceObjName</i>	Specify the name of the object to be copied.
<i>targetPortalName</i>	Specify the name of the portal to which the object will be copied.
<i>targetPrntFldrName</i>	Specify the name of the folder that will be the parent folder for the source object.
<i>copyChildren</i>	Specify whether to also copy the children of the source object. This parameter is valid only with folder objects. Values are: • "Yes" copy child objects • "No" do not copy child objects This parameter is case-sensitive.

Returns

A Boolean value: True if object copied successfully, False otherwise.

Example

```
&Success = &Portal.CopyObject("PORTAL", "F", "PEOPLETOOLS_QUALITY", "BOGUS", ⇒  
"PORTAL_ROOT_OBJECT", "Yes");  
If (&Success = False) Then  
    WinMessage("portal copy failed");
```

```
Exit;  
End-If;
```

Considerations Using CopyObject

The source portal name and the target portal name cannot be the same name.

The *targetPrntFldrName* must be a folder that exists in the portal identified by the target portal name. It cannot be null (or empty). If you need to copy an entire portal, the portal must first be "created" using the Create method, before copying over all the folders and content references.

The *copyChildren* parameter is ignored for content references. However, it still must be set to "Yes" or "No".

Create method: PortalRegistry class

Syntax

```
Create(RegistryName)
```

Description

The Create method creates a new PortalRegistry in the PortalRegistry object called *RegistryName*. The specified registry must be a new registry. The Create method returns False if the registry already exists.

The new PortalRegistry is immediately committed to the database. If you change any property of a PortalRegistry after you create the object, use the Save method to commit your changes to the database.

When a registry is created, a folder called *Root* is automatically created. This is the root folder for the registry.

Note

If you're using Visual Basic, you must check that the PortalRegistry is actually created. If you use a duplicate name, a zero is returned, but no error results.

Parameters

Parameter	Description
<i>RegistryName</i>	The name of the registry to create. This parameter takes a string value. If you specify a registry that already exists, this method returns a False value.

Returns

A Boolean value: True if the PortalRegistry object is successfully created, False otherwise.

Example

```
&PORTAL_NAME = MY_PORTAL_RECORD.PORTALNAME;  
&MyPortal = %Session.GetPortalRegistry();  
  
If NOT &MyPortal.Create(&PORTAL_NAME) Then;  
    /* portal not created - do error processing */  
End-If;
```

Related Topics

- [Open method: PortalRegistry class](#)
- [Save method: PortalRegistry class](#)
- [Close method: PortalRegistry class](#)
- [Delete method: PortalRegistry class](#)

CreateContentRefLink method: PortalRegistry class

Syntax

```
CreateContentRefLink(LinkName, LinkLabel, LinkParent, CRefPortalName,  
                    CRefObjectName)
```

Description

Use the CreateContentRefLink method to create a link to any content reference in any portal in a local database.

For example, using this method, you can create a link to a content reference in the EMPLOYEE portal, to a content reference in the CUSTOMER portal, or to a content reference in the current portal.

Parameters

Parameter	Description
<i>LinkName</i>	Specify the name of the link as a string. This is the ID of the link. The name is validated as that of the content reference name. It cannot start with a number, and can not have special characters and spaces. This property is not translated.
<i>LinkLabel</i>	Specify the label of the link as a string. This property can be translated. This is the label that appears on the left hand navigation menu. If this value is blank, a linked content reference label is displayed instead.
<i>LinkParent</i>	Specify the parent folder of the link, as a string.
<i>CRefPortalName</i>	Specify the portal name of the content reference, to which the link is pointing, as a string.

Parameter	Description
<i>CRefObjectName</i>	Specify the ID of the content reference to which the link is pointing, as a string.

Returns

A reference to a newly created ContentReference link object.

Example

```
Local ApiObject &Portal, &CRef, &CReflink;  
&Portal = PortalOpen();  
&CReflink = &Portal.CreateContentRefLink(<Unique Link Name> , <LinkLabel>, =>  
    "<Link's Parent folder >", "<Cref Portal Name>", <Cref Object Name>);  
  
/*... Use the link object */  
  
&Portal.Close();
```

CreateRemote method: PortalRegistry class

Syntax

```
CreateRemote(PortalName, RemoteNodeName)
```

Description

Use the CreateRemote method to create a remote portal. Although you can have more than one portal on a node, they must all be uniquely named.

Parameters

Parameter	Description
<i>PortalName</i>	Specify the name of the new portal to create on the remote node.
<i>RemoteNodeName</i>	Specify the name of the remote node to create the new portal on.

Returns

A Boolean value: True if the PortalRegistry object is successfully created, False otherwise.

Related Topics

- [Create method: PortalRegistry class](#)
- [Portals property: PortalRegistry class](#)

Delete method: PortalRegistry class

Syntax

Delete(*RegistryName*)

Description

The Delete method deletes the PortalRegistry *from the database*, including any data and tables.

Warning

If you delete a PortalRegistry, you delete *everything*. Your entire PortalRegistry is gone, all the folders, content references, templates, and so on. Do not delete a PortalRegistry object unless you are absolutely certain that you want to.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database *as soon* as the method is executed.

The Delete method can only be used with a *closed* registry, it cannot be used on an open registry. Before you use the Delete method, you must explicitly close the PortalRegistry object (with the Close method.) The Delete method returns False if you try to delete an open PortalRegistry object.

Parameters

Parameter	Description
<i>RegistryName</i>	The name of the registry to delete. This parameter takes a string value. If you specify a registry that doesn't exist, this method returns a False value.

Returns

A Boolean value: True if the PortalRegistry object is successfully deleted, False otherwise.

Example

The following example deletes all PortalRegistry objects that start with HRMS_99.

```
Local ApiObject &MySession;  
Local ApiObject &MyPortal;  
  
&MySession = %Session;
```



```
&MyPortal = &MySession.GetPortalRegistry();  
  
&MyPortal.Delete("HRMS_99");
```

Related Topics

- [Close method: PortalRegistry class](#)
- [Open method: PortalRegistry class](#)

DeleteHomepage method: PortalRegistry class

Syntax

```
DeleteHomepage()
```

Description

The DeleteHomepage method deletes the current user's homepage. This method is valid only after a user has opened a PortalRegistry object.

Parameters

None.

Returns

A Boolean value: True if the homepage is successfully deleted, False otherwise.

Related Topics

- [UserHomepage Class](#)
The UserHomepage represents a homepage for a user. It contains all the tabs and pagelets the user has selected for their homepage.

FindCRefByName method: PortalRegistry class

Syntax

```
FindCRefByName(Name)
```

Description

The FindCRefByName method returns the content reference object corresponding to *Name*. The name is a unique identifier for each content reference.

Parameters

Parameter	Description
<i>Name</i>	A unique name within the registry that identifies the content reference. This parameter takes a string value. This parameter uses the name, not the label, of a content reference.

Returns

What this method returns depends on the condition of the content reference:

- If the content reference name is valid and the end-user has access to the content reference, a content reference object is returned.
- If the content reference is valid but the end-user doesn't have access to it a content reference object is returned, however, the only property you can access is the Authorized property.
- If you specified an invalid name this method returns NULL.

Example

The following example returns a GLOBAL_PAYROLL content reference object:

```
&CRef = &Portal.FindCRefByName("GLOBAL_PAYROLL");
```

Considerations on Returned Content References

This method returns content reference objects that aren't yet valid as well as ones that are no longer valid. When you create your program, you must check for these invalid values if you don't want to use them. You can check using ValidTo, ValidFrom, or IsVisible.

This method returns content reference objects that you aren't authorized to. When you create your program, you should always check the Authorized property. This is the only property you can view from an object that you're not authorized to view.

Related Topics

- [Content Reference Class](#)
The content reference class provides access to some kind of content. The type of content depends on the content reference.

FindCRefByURL method: PortalRegistry class

Syntax

```
FindCRefByURL(URL)
```

Description

The FindCRefByURL method returns the content reference object corresponding to *URL*. The URL specified by *URL* must be an absolute URL.

Note

The portal registry API needs the current URI of the local node to work. During runtime, it gets this information from the current Web server. For Application Engine programs, there isn't a current Web server, so it has to get this information from the database.

If you have multiple content providers with the same URI, FindCRefByURL looks for the specified content reference with all those content providers.

To access pagelet categories and their associated pagelets, use the PageletCategories collection from the PortalRegistry object, not FindCRefByURL.

Parameters

Parameter	Description
<i>URL</i>	A URL that represents the content. This parameter takes a string value. This URL must be an absolute URL. This parameter is case-insensitive.

Returns

What this method returns depends on the condition of the content reference:

- If the end-user has access to the URL, a content reference object is returned.
- If the content reference is registered, but the end-user doesn't have access to it, a content reference is returned, but the only property you can access is the Authorized property.
- If a URL isn't registered or is invalid, this method returns NULL.

Example

The following example finds a content reference from a URL:

```
&UserCRef = &Portal.FindCRefByURL("http://www.example.com");
```

Considerations on Returned Content References

This method returns content reference objects that aren't yet valid as well as ones that are no longer valid. When you create your program, check for these properties (ValidTo and ValidFrom) if you don't want to use them.

This method returns content reference objects that the end-user isn't authorized to. When you create your program, always check the Authorized property. This is the only property you can view from an object that the end-user isn't authorized to view.

Related Topics

- [GetQualifiedURL method: PortalRegistry class](#)
- [QualifiedURL property: Content Reference class](#)
- [Content Reference Class](#)
The content reference class provides access to some kind of content. The type of content depends on the content reference.

FindCRefForURL method: PortalRegistry class

Syntax

```
FindCRefForURL(URL)
```

Description

The FindCRefForURL method returns the content reference object corresponding to *URL*. The URL specified by *URL* must be an absolute URL.

If the exact content reference is not found, this method tries to look for the content reference again, after stripping off the query portion of the URL.

If you don't want the system searched without the query string, use the `FindCRefByURL` method.

Note

The portal registry API needs the current URI of the local node to work. During runtime, it gets this information from the current Web server. For Application Engine programs, there isn't a current Web server, so it has to get this information from the database.

If you have multiple content providers with the same URI, `FindCRefForURL` looks for the specified content reference with all those content providers.

To access pagelet categories and their associated pagelets, use the `PageletCategories` collection from the `PortalRegistry` object, not `FindCRefForURL`.

Parameters

Parameter	Description
<i>URL</i>	A URL that represents the content. This parameter takes a string value. This URL must be an absolute URL. This parameter is case-insensitive.

Returns

What this method returns depends on the condition of the content reference:

- If the end-user has access to the URL, a content reference object is returned.
- If the content reference is registered, but the end-user doesn't have access to it, a content reference is returned, but the only property you can access is the `Authorized` property.
- If a URL isn't registered or is invalid, this method returns `NULL`.

Example

The following example finds a content reference from a URL. If the content reference isn't found from the full URL, the query string is stripped and the system searches again:

```
&UserCRef = &Portal.FindCRefForURL("http://www.example.com/crefs/psportal=&
/technologies/?url=http%3a%2f%2faugust2004%2fipass.html");
```

Considerations on Returned Content References

This method returns content reference objects that aren't yet valid as well as ones that are no longer valid. When you create your program, check for these properties (`ValidTo` and `ValidFrom`) if you don't want to use them.

This method returns content reference objects that the end-user isn't authorized to. When you create your program, always check the `Authorized` property. This is the only property you can view from an object that the end-user isn't authorized to view.

Related Topics

- [GetQualifiedURL method: PortalRegistry class](#)
- [QualifiedURL property: Content Reference class](#)
- [FindCRefByURL method: PortalRegistry class](#)
- [Content Reference Class](#)
The content reference class provides access to some kind of content. The type of content depends on the content reference.

FindCRefLinkByName method: PortalRegistry class

Syntax

```
FindCRefLinkByName(LinkName)
```

Description

Use the FindCRefLinkByName method to find the existing link in the current portal. If the link is found a reference to ContentReference link object is returned. A Null value is returned if the link is not found in the database, and the error message is added to message collection

Parameters

Parameter	Description
<i>LinkName</i>	Specify the name of the link as a string. This is the ID of the link.

Returns

A reference to an existing ContentReference link object or a Null value if the link is not found.

Considerations on Returned Links

This method returns links that aren't yet valid as well as ones that are no longer valid. When you create your program, you must check for these properties (ValidTo and ValidFrom) if you don't want to use them. This method may also return objects that you aren't authorized to. When you create your program, you should always check the Authorized property. This is the only property you can view from an object that you're not authorized to view.

FindFolderByName method: PortalRegistry class

Syntax

```
FindFolderByName(Name)
```

Description

The FindFolderByName method returns the Folder object corresponding to *Name*. The name is a unique identifier for each folder.

Parameters

Parameter	Description
<i>Name</i>	A unique name within the registry that identifies the folder. This parameter takes a string value. This parameter takes the name of a folder, not the label.

Returns

What this method returns depends on the condition of the folder:

- If the folder name is valid and the end-user has access to the folder, a folder object is returned.
- If the folder is valid but the end-user doesn't have access to it a folder object is returned, however, the only property you can access is the Authorized property.
- If you specified an invalid name this method returns NULL.

Example

The following example returns a folder named ROOT:

```
&MyFolder = &MyPortal.FindFolderByName("ROOT");
```

The following example returns the folder object for an already instantiated content reference:

```
&Folder = &Portal.FindFolderByName(&CRef.ParentName);
```

Considerations on Returned Folders

This method returns Folder objects that aren't yet valid as well as ones that are no longer valid. When you create your program, check for these properties (ValidTo and ValidFrom) if you don't want to use them.

This method returns folder objects that you aren't authorized to. When you create your program, always check the Authorized property. This is the only property you can view from an object that you're not authorized to view.

Related Topics

- [Folder Class](#)
Folder objects are instantiated from other classes as follows:

FindPgltByName method: PortalRegistry class

Syntax

```
FindPgltByName(PageletName)
```

Description

The FindPgltByName method returns the pagelet object corresponding to *PageletName*. The name is a unique identifier for each pagelet.

Parameters

Parameter	Description
<i>PageletName</i>	A unique name within the registry that identifies the Pagelet. This parameter takes a string value. This parameter takes the name of a Pagelet, not the label.

Returns

What this method returns depends on the condition of the Pagelet:

- If the Pagelet name is valid and the end-user has access to the Pagelet, a Pagelet object is returned.
- If the Pagelet is valid but the end-user doesn't have access to it a Pagelet object is returned, however, the only property you can access is the Authorized property.
- If you specified an invalid name this method returns NULL.

Example

The following example returns a pagelet named HomePg_Dictionary:

```
&MyPglt = &MyPortal.FindPgltByName("HomePg_Dictionary");
```

Considerations on Returned Pagelets

This method returns pagelet objects that aren't yet valid as well as ones that are no longer valid. When you create your program, check for these properties (ValidTo and ValidFrom) if you don't want to use them.

This method returns pagelet objects that you aren't authorized to. When you use create your program, always check the Authorized property. This is the only property you can view from an object that you're not authorized to view.

Related Topics

- [Pagelet Class](#)
A pagelet represents a URL that renders a section of content for a homepage. Pagelets are assigned to specific categories.

GetAbsoluteContentURL method: PortalRegistry class

Syntax

```
GetAbsoluteContentURL(NodeName, URL)
```

Description

The GetAbsoluteContentURL method returns the absolute unwrapped simple URL of the content, in the context of the current portal. For example, if the PortalRegistry object accessed a portal called Employees, and the method were called like this:

```
&Registry.getAbsoluteContentURL(Node.CRM, "/c/SERVICES.ORDERS.GBL");
```

It would return the following string:

```
http://crmserver/servlets/psc/crmHome/Employees/CRM/c/SERVICES.ORDERS.GBL
```

In the returned string, the portion of the string from server name through *portal_home* (crmHome in the example) are the ones associated with the content node (CRM in the example). The portal is the current portal, and the rest of the URL is the URL string passed in.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of the node that contains the content. You can also use a string, such as %Node, for this value.
<i>URL</i>	Specify the relative URL pointing to the content that you want the absolute URL generated for.

Returns

A string containing the absolute URL.

GetDefaultHPTabOID method: PortalRegistry class

Syntax

```
GetDefaultHPTabOID()
```

Description

Use the GetDefaultHPTabOID method to return the name of the first homepage tab that is found and authorized for the current user ID.

The search order of the tabs depends on Sequence number of the tab name and is sorted alphabetically.

Parameters

None.

Returns

A string

GetQualifiedURL method: PortalRegistry class

Syntax

```
GetQualifiedURL(ContentProvider, RelativeURL)
```


Description

Note

This method is maintained only for backward compatibility. If your existing code uses this method, it actually returns the value from `GetAbsoluteContentURL` method. New applications should use the `GetAbsoluteContentURL` method.

Related Topics

- [GetAbsoluteContentURL method: PortalRegistry class](#)

GrantPermissionForComponent method: PortalRegistry class

Syntax

```
GrantPermissionForComponent(MenuName, ComponentName, Market, PermListName,  
NodeName)
```

Description

Use the `GrantPermissionForComponent` method to grant the specified permission and cascaded upwards on parent folders to the specified component. In addition, the specified permission is granted to any component references that point to the specified component, and any parent folders.

Components that have query strings are also searched and permissions are applied on them.

If you use the string "LOCAL_NODE" as *NodeName*, the system uses the node name currently defined as local.

All component entries in the portal registry are affected for all the portals. Not just the current portal.

Parameters

Parameter	Description
<i>MenuName</i>	Specify the menu name, as a string, that the component you want to grant permissions for is associated with.
<i>ComponentName</i>	Specify the component name, as a string, that you want to grant permissions for.
<i>Market</i>	Specify the market, as a string, associated with the component that you want to grant permissions for.
<i>PermListName</i>	Specify the name of the permission list, as a string, that you want to use.

Parameter	Description
<i>NodeName</i>	Specify the node of the component reference, as a string, that points to the component reference that you want to grant permissions for. If you use the string "LOCAL_NODE", the system uses the node name currently defined as local.

Returns

A Boolean value: True if method completed successfully, False otherwise.

Example

The My Profile Component Reference points to the USERMAINT_SELF component. Using the following example, "ALLPANLS" permission is granted to the MY_PROFILE component reference, as well as "MY INFO", the parent folder.

```
&Portal.GrantPermissionForComponent("MAINTAIN_SECURITY", "USERMAINT_SELF",  
"GBL", ⇒  
"ALLPANLS", "LOCAL_NODE");
```

Related Topics

- [GetAbsoluteContentURL method: PortalRegistry class](#)
- Security Administration: Understanding Permission Lists

GrantPermissionForScript method: PortalRegistry class

Syntax

```
GrantPermissionForScript(RecordName, FieldName, EventName, FuncName,  
PermListName, NodeName)
```

Description

Use the GrantPermissionForScript method to grant the specified permission to the specified iScript. In addition, the specified permission is granted to any component references that point to the specified iScript, and any parent folders.

If you use the string "LOCAL_NODE" as *NodeName*, the system uses the node name currently defined as local.

All iScript entries in the portal registry are affected for all the portals. Not just the current portal.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the record name, as a string, of the record containing the iScript. All iScripts are contained on records whose names start with "WEBLIB".

Parameter	Description
<i>FieldName</i>	Specify the name of the field, as a string, containing the iScript.
<i>EventName</i>	Specify the name of the event, as a string, containing the iScript. Generally iScripts are contained in the FieldFormula event.
<i>FuncName</i>	Specify the name of the function, as a string, containing the iScript.
<i>PermListName</i>	Specify the name of the permission list, as a string, that you want to use.
<i>NodeName</i>	Specify the node of the component reference, as a string, that points to the component reference that you want to grant permissions for. If you use the string "LOCAL_NODE", the system uses the node name currently defined as local.

Returns

A Boolean value: True if method completed successfully, False otherwise.

Example

```
&Portal.GrantPermissionForScript("WEBLIB_ALERT", "ALERTCOUNT",  
"FieldFormula", ⇒  
"Connect_Alert", "ALLPGS", "Local_Node");
```

Related Topics

- [RevokePermissionForComponent method: PortalRegistry class](#)
- Security Administration: Understanding Permission Lists

Open method: PortalRegistry class

Syntax

`Open(RegistryName)`

Description

The Open method opens the PortalRegistry specified by the parameters. The registry must already exist. The Open method can be used only with a *closed* PortalRegistry, it cannot be used on an open registry.

Parameters

Parameter	Description
<i>RegistryName</i>	The name of the registry to open. This parameter takes a string value. If you specify a registry that doesn't exist, this method returns a False value.

Returns

A Boolean value: True if the PortalRegistry object is successfully opened, False otherwise.

Example

In the following example, the name of the portal is stored as the value of a field in a record.

```
&PORTAL_NAME = EO_PE_REG_AET.PORTAL_NAME;  
&Portal = %Session.GetPortalRegistry();  
  
&Portal.Open(&PORTAL_NAME);
```

Related Topics

- [Open method: PortalRegistry class](#)
- [Save method: PortalRegistry class](#)
- [Close method: PortalRegistry class](#)
- [Delete method: PortalRegistry class](#)

PermissionListDelete method: PortalRegistry class

Syntax

```
PermissionListDelete(PermListName)
```

Description

Use the PermissionListDelete method to delete the specified permission list from the PortalRegistry.

If you try to delete a permission list that is still in use, you receive an error when you try to save the object.

The permission list is deleted from all the portal objects for all the portal.

Parameters

Parameter	Description
<i>PermListName</i>	Specify the permission list to delete from the PortalRegistry.

Returns

A Boolean value: True if the permission list is successfully deleted, False otherwise.

PermissionListSaveAs method: PortalRegistry class

Syntax

```
PermissionListSaveAs(PermListSourceName, PermListTargetName)
```

Description

Use the `PermissionListSaveAs` method to copy the specified permission list in the `PortalRegistry`.

Parameters

Parameter	Description
<i>PermListSourceName</i>	Specify the name of the <code>PermissionList</code> to copy.
<i>PermListTargetName</i>	Specify the name that you want to give the new <code>PermissionList</code> .

Returns

A Boolean value: True if the permission list is successfully copied, False otherwise.

RevokePermissionForComponent method: PortalRegistry class

Syntax

```
RevokePermissionForComponent(MenuName, ComponentName, Market, PermListName,  
NodeName)
```

Description

Use the `RevokePermissionForComponent` method to revoke the specified permission to the specified component. In addition, the specified permission is revoked for any component references that point to the specified component.

If you use the string "LOCAL_NODE" as *NodeName*, the system uses the node name currently defined as local.

All component entries in the portal registry are affected for all the portals. Not just the current portal.

Parameters

Parameter	Description
<i>MenuName</i>	Specify the menu name, as a string, that the component that you want to revoke permissions for is associated with.
<i>ComponentName</i>	Specify the component name, as a string, that you want to revoke permissions for.
<i>Market</i>	Specify the market, as a string, associated with the component that you want to revoke permissions for.
<i>PermListName</i>	Specify the name of the permission list, as a string, that you want to use.

Parameter	Description
<i>NodeName</i>	Specify the node of the component reference, as a string, that points to the component reference that you want to revoke permissions for. If you use the string "LOCAL_NODE", the system uses the node name currently defined as local.

Returns

A Boolean value: True if method completed successfully, False otherwise.

Example

The My Profile Component Reference points to the USERMAINT_SELF component. Using the following example, "ALLPANLS" permission is revoked to the MY_PROFILE component reference.

```
&Portal.RevokePermissionForComponent("MAINTAIN_SECURITY", "USERMAINT_SELF",  
"GBL", ⇒  
"ALLPANLS", "LOCAL_NODE");
```

Related Topics

- [GrantPermissionForComponent method: PortalRegistry class](#)
- Security Administration: Understanding Permission Lists

RevokePermissionForScript method: PortalRegistry class

Syntax

```
RevokePermissionForScript(RecordName, FieldName, EventName, FuncName,  
PermListName, NodeName)
```

Description

Use the RevokePermissionForScript method to revoke the specified permission to the specified iScript. In addition, the specified permission is revoked for any component references that point to the specified iScript.

If you use the string "LOCAL_NODE" as *NodeName*, the system uses the node name currently defined as local.

All component entries in the portal registry are affected for all the portals. Not just the current portal.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the record name, as a string, of the record containing the iScript. All iScripts are contained on records whose names start with "WEBLIB".

Parameter	Description
<i>FieldName</i>	Specify the name of the field, as a string, containing the iScript.
<i>EventName</i>	Specify the name of the event, as a string, containing the iScript.
<i>FuncName</i>	Specify the name of the function, as a string, containing the iScript. Generally iScripts are contained in the FieldFormula event.
<i>PermListName</i>	Specify the name of the permission list, as a string, that you want to use.
<i>NodeName</i>	Specify the node of the component reference, as a string, that points to the component reference that you want to revoke permissions for. If you use the string "LOCAL_NODE", the system uses the node name currently defined as local.

Returns

A Boolean value: True if method completed successfully, False otherwise.

Example

```
&Portal.RevokePermissionForScript("WEBLIB_ALERT", "ALERTCOUNT",  
"FieldFormula", ⇒  
"Connect_Alert", "ALLPGS", "Local_Node");
```

Related Topics

- [GrantPermissionForScript method: PortalRegistry class](#)
- Security Administration: Understanding Permission Lists

Save method: PortalRegistry class

Syntax

Save()

Description

The Save method saves changes that you made to the PortalRegistry or to a node template. It does *not* save any changes that you made to a folder, content reference, and so on.

Note

To save changes for a folder or content reference use the save method associated with that object.

Parameters

None.

Returns

A Boolean value: True if the PortalRegistry object is successfully saved, False otherwise.

Example

```
If Not(&MyPortal.Save()) Then
    /* do error checking */
End-if:
```

PortalRegistry Class Properties

In this section, we discuss the PortalRegistry class properties. The properties are discussed in alphabetical order.

DefaultTemplate property: PortalRegistry class

Description

This property returns or sets the name of the default template for this PortalRegistry object as a string.

If you delete a template for a content reference, and none of the other content references on a page have a template, the default template specified with the Node is used. If there's no template for the Node, the template specified with this property is used.

To return a reference to the content reference that contains the template specified by this property, use the TemplateObject property.

Note

If you change the Default Template for a portal, the template won't take effect until you close all the existing browser windows with the session and open a new browser window.

This property takes only the first 30 characters of a value. If you specify a value longer than 30 characters, the remaining characters are ignored.

This property is read/write.

Related Topics

- [TemplateObject property: PortalRegistry class](#)

Description property: PortalRegistry class

Description

This property returns or sets the description of this PortalRegistry object as a string

The length of this property is 256 characters.

This property is read/write.

Favorites property: PortalRegistry class

Description

This property returns a reference to the Favorites Collection for the current end-user.

This property is read-only.

Related Topics

- [Favorite Collection](#)
The favorite collection provides access to the favorites for a particular user.

FolderNavObject property: PortalRegistry class

Description

This property specifies the content reference name to be used for the folder navigation object. When the folder navigation is turned on, this content reference is displayed as the folder navigation homepage. This property takes a string value.

This property is read/write.

Related Topics

- [IsFolderNavigation property: PortalRegistry class](#)

Homepage property: PortalRegistry class

Description

This property returns a reference to the Homepage for the current end-user.

This property is read-only.

IsFolderNavigation property: PortalRegistry class

Description

This property specifies if there is folder navigation. When the folder navigation is turned on, the user can see a folder homepage when clicked on the folder in the left-hand navigation menu. This property takes a Boolean value: true if folder navigation is on, false otherwise.

This property is read/write.

Related Topics

- [FolderNavObject property: PortalRegistry class](#)

LandingPage property: PortalRegistry class

Description

Use the LandingPage property to return a reference to a UserHomepage object representing the current fluid homepage for the current user.

This property is read-only.

Important

Use this property within fluid applications only.

Related Topics

- [UserHomepage Class](#)
The UserHomepage represents a homepage for a user. It contains all the tabs and pagelets the user has selected for their homepage.

LandingTabDefinitions property: PortalRegistry class

Description

Use the LandingTabDefinitions property to return a reference to a TabDefinitions collection that contains all the fluid homepage definitions for the current user for the current portal.

This property is read-only.

Important

Use this property within fluid applications only.

Related Topics

- [TabDefinition Collection](#)
A TabDefinition collection is the collection of all TabDefinitions for a portal.

Name property: PortalRegistry class

Description

This property returns the name of the PortalRegistry object as a string.

The length of this property is 30 characters.

This property is read-only.

NodeTemplates property: PortalRegistry class

Description

This property returns a reference to a NodeTemplate Collection. This property can be used with a *closed* portal registry, that is, before you open it with the Open method.

This property is read-only.

Related Topics

- [NodeTemplate Collection](#)
The NodeTemplate collection contains a set of references to each node template object in a portal.

OwnerId property: PortalRegistry class

Description

This property returns or sets the owner ID of the PortalRegistry object as a string.

This property is read/write.

PageletCategories property: PortalRegistry class

Description

This property returns a reference to a PageletCategories Collection that contains all the PageletCategories for a portal.

This property is read-only.

Related Topics

- [PageletCategory Collection](#)
The PageletCategory Collection provides access to a collection of PageletCategory objects in a PageletCategory object.

Portals property: PortalRegistry class

Description

This property returns a reference to a Portal collection that contains references to all the portals in the database.

This property is read-only.

Related Topics

- [Portal Collection](#)
The portal collection contains a set of references to each portal defined in the database.

RootFolder property: PortalRegistry class

Description

This property returns the root folder object for this PortalRegistry object.

This property is read-only.

SectionTemplates property: PortalRegistry class

Description

This property returns a reference to the Section Template Collection registered in the portal registry for the current portal. These are the section templates registered in the portal registry under the folder: Fluid Structure Content > Fluid Section Templates folder.

This property is read-only.

TabDefinitions property: PortalRegistry class

Description

This property returns reference to a TabDefinitions Collection that contains all the TabDefinitions for a portal.

This property is read-only.

Related Topics

- [TabDefinition Collection](#)
A TabDefinition collection is the collection of all TabDefinitions for a portal.

TemplateObject property: PortalRegistry class

Description

This property returns a reference to a content reference object that contains the template specified by the DefaultTemplate property. If no template is specified with DefaultTemplate, this property returns Null.

This property is read-only.

Related Topics

- [DefaultTemplate property: PortalRegistry class](#)

PortalRegistry Collection

A PortalRegistry Collection is returned by the FindPortalRegistries session class method.

See [FindPortalRegistries method: Session class](#).

PortalRegistry Collection Methods

In this section, we discuss the PortalRegistry collection methods. The methods are discussed in alphabetical order.

First method: PortalRegistry collection

Syntax

```
First()
```

Description

The First method returns the first PortalRegistry object in the PortalRegistry collection.

Example

```
&MyRegistry = &MyCollection.First();
```

Item method: PortalRegistry collection

Syntax

```
Item(number)
```

Description

The Item method returns the PortalRegistry object with the position in the PortalRegistry collection specified by *number*.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the PortalRegistry object that you want returned.

Returns

A PortalRegistry object if successful, NULL otherwise.

Example

```
For &I = 1 to &MyCollection.Count  
    &MyRegistry = &MyCollection.Item(&I);  
    /* Do processing */  
End-For;
```

Next method: PortalRegistry collection

Syntax

```
Next()
```

Description

The Next method returns the next PortalRegistry object in the PortalRegistry collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Example

```
&MyRegistry = &MyCollection.Next();
```

PortalRegistry Collection Property

This section discusses the Count property.

Count property: PortalRegistry collection

Description

This property returns the number of PortalRegistry objects in the PortalRegistry collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Node Class

The node indicates the URI of the content server. If the node is a PeopleSoft content server, it has a PeopleSoft server URI. If the node has external content, the URI indicates the external content.

Use the IsLocal or IsDefault to determine if a node from a RemoteNode collection is remote or local.

Node objects are instantiated from the following:

- From a Session object with the GetLocalNode method.
- From a Node Collection with the First, InsertItem, ItemByName, and Next methods.
- From a RemoteNode Collection with the First, InsertItem, ItemByName, and Next methods.

See [GetLocalNode method: Session class](#), [Node Collection](#), [RemoteNode Collection](#).

Node Class Properties

In this section, we discuss the Node class properties. The properties are discussed in alphabetical order.

ActiveNode property: Node class

Description

This property indicates whether the node has been specified as an active node. This property returns a Boolean value: True, the node is active, False otherwise.

This property is read-only.

AppsRelease property: Node class

Description

This property returns the release of the PeopleSoft Applications hosted on this node as a string. This property is valid only when the NodeType property is set to PeopleSoft (PIA).

This property is read-only.

Related Topics

- [NodeType property: Node class](#)

ContentURI property: Node class

Description

This property returns the URI for the content Web server of this node as a string.

This property is read-only.

DefaultPortalName property: Node class

Description

This property returns the name of the portal associated with the node as the default portal for the node.

This property is read-only.

Description property: Node class

Description

This property returns the description for this node as a string.

The length of this property depends on your system database limit for LONG fields.

This property is read-only.

IsDefault property: Node class

Description

This property indicates whether the node has been specified as the default local node. This property takes a Boolean value: True, this node has been specified as the default local node, False otherwise.

This property is valid only when the NodeType property is set to PeopleSoft (PIA).

This property is read-only.

Related Topics

- [NodeType property: Node class](#)

IsLocal property: Node class

Description

This property indicates whether this node has been specified as the local PeopleSoft node. This property takes a Boolean value: True, this node has been specified as a local node, False otherwise.

This property is valid only when the NodeType property is set to PeopleSoft (PIA).

This property is read-only.

Related Topics

- [NodeType property: Node class](#)

Name property: Node class

Description

This property returns the name for this node object as a string. The name is a unique identifier for each node object.

Every node name must be unique in the database.

This property is read-only.

NodePassword property: Node class

Description

This property returns the password for this node object as a string.

This property is read-only.

NodeType property: Node class

Description

This property indicates what the node is used for. Nodes can either define PeopleSoft or external systems. PeopleSoft nodes have more capabilities than external nodes, therefore several other properties depend on this property.

Values are:

Value	Description
PIA	PIA (PeopleSoft 8.4 simple URL format)
EX	External Node
ICT	ICType (used for 8.1x content)

PIA is the default value on a new Node.

This property is read-only.

PortalURI property: Node class

Description

This property returns the URI for the portal Web server of this node as a string. This property is valid only when the NodeType property is set to PeopleSoft (PIA).

This property is read-only.

Related Topics

- [NodeType property: Node class](#)

ToolsRelease property: Node class

Description

This property returns the release of PeopleTools running on this node as a string. This property is valid only when the NodeType property is set to PeopleSoft (PIA).

This property is read-only.

Related Topics

- [NodeType property: Node class](#)

Node Collection

A node collection contains a set of references to all nodes defined in the database.

Node Collection Methods

In this section, we discuss the Node collection methods. The methods are discussed in alphabetical order.

First method: Node collection

Syntax

```
First()
```

Description

The First method returns the first Node object in the Node collection.

Parameters

None.

Returns

A Node object.

Example

```
&MyNode = &MyCollection.First();
```

ItemByName method: Node collection

Syntax

```
ItemByName(NodeName)
```

Description

The ItemByName method returns the Node object with the name specified by *NodeName*.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of an existing node in the Node collection. If you specify an invalid name, the object returned is NULL.

Returns

A Node object if successful, NULL otherwise.

Example

```
&MyOldNode = &MyPortal.Nodes.ItemByName("HRMS");
```

Next method: Node collection

Syntax

`Next()`

Description

The Next method returns the next Node object in the Node collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A Node object.

Example

```
&MyNode = &MyCollection.Next();
```

Node Collection Property

In this section, we discuss the Count property.

Count property: Node collection

Description

This property returns the number of Node objects in the Node Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

RemoteNode Collection

A remote node collection contains a set of references to all the nodes defined in the database, both local and remote.

Use the IsLocal property of the returned node object to determine if the node is remote or local.

RemoteNode Collection Methods

In this section, we discuss the RemoteNode collection methods. The methods are discussed in alphabetical order.

First method: RemoteNode collection

Syntax

```
First()
```

Description

The First method returns the first Node object in the RemoteNode collection.

Parameters

None.

Returns

A Node object.

Example

```
&MyNode = &MyCollection.First();
```

ItemByName method: RemoteNode collection

Syntax

```
ItemByName(NodeName)
```

Description

The ItemByName method returns the Node object with the name specified by *NodeName*.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of an existing node in the RemoteNode collection. If you specify an invalid name, the object returned is NULL.

Returns

A Node object if successful, NULL otherwise.

Example

```
&MyOldNode = &MyPortal.RemoteNodes.ItemByName("HRMS");
```

Next method: RemoteNode collection

Syntax

`Next()`

Description

The Next method returns the next Node object in the RemoteNode collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A Node object.

Example

```
&MyNode = &MyCollection.Next();
```

RemoteNode Collection Property

In this section, we discuss the Count property.

Count property: RemoteNode collection

Description

This property returns the number of Node objects in the RemoteNode Collection, as a number. This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Portal Class

The portal class provides access to portals declared in the session.

A portal object is instantiated by the First, InsertItem, ItemByName, and Next Portal Collection methods

See [Portal Collection](#).

Portal Class Method

In this section, we discuss the Portal class methods. The methods are discussed in alphabetical order.

Save method: Portal class

Syntax

Save()

Description

Use the Save method to save changes you made to the portal object.

Parameters

None.

Returns

A Boolean value: True if the portal object is successfully saved, False otherwise.

Portal Class Properties

In this section, we discuss the Portal class properties. The properties are discussed in alphabetical order.

HostNameName property: Portal class

Description

This property sets or returns the name of the node hosting the portal as a string.

This property is read/write.

IsLocal property: Portal class

Description

This property indicates whether the portal is defined as local or remote. This property returns a Boolean value: True, the portal is defined as local, False otherwise.

This property is read-only.

Name property: Portal class

Description

This property returns the name of this portal as a string. This name exactly matches the portal name of the portal registry defined in the database.

This property is read-only.

Portal Collection

The portal collection contains a set of references to each portal defined in the database.

A portal collection is instantiated by the Portals PortalRegistry property.

See [Portals property: PortalRegistry class](#).

Portal Collection Methods

In this section, we discuss the Portal collection methods. The methods are discussed in alphabetical order.

First method: Portal collection

Syntax

```
First()
```

Description

The First method returns the first Portal object in the Portal collection.

Parameters

None.

Returns

A Portal object.

Example

```
&MyPortal = &MyCollection.First();
```

ItemByName method: Portal collection

Syntax

```
ItemByName(PortalName)
```

Description

The ItemByName method returns the Portal object with the name *PortalName*.

Parameters

Parameter	Description
<i>PortalName</i>	Specify the name of an existing portal within the collection. If you specify an invalid name, the object returns NULL.

Returns

A Portal object if successful, NULL otherwise.

Example

```
&MyPortal = &MyPortal.Portals.ItemByName("HRMS");
```

Next method: Portal collection

Syntax

```
Next()
```

Description

The Next method returns the next Portal object in the Portal collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A Portal object.

Example

```
&MyPortal = &MyCollection.Next();
```

Portal Collection Properties

In this section, we discuss the Count property.

Count property: Portal collection

Description

This property returns the number of Portal objects in the Portal Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```


NodeTemplate Class

The NodeTemplate class provides access to the default template assigned to a node in this portal.

A NodeTemplate object is instantiated by the First, InsertItem, ItemByName, and Next NodeTemplate Collection methods.

See [NodeTemplate Collection](#).

NodeTemplate Class Properties

In this section, we discuss the NodeTemplate class properties. The properties are discussed in alphabetical order.

DefaultTemplate property: NodeTemplate class

Description

This property specifies the name of the template to be applied to the node.

This property is read/write.

Name property: NodeTemplate class

Description

This property specifies the name of node that the template is to be applied to.

This property is read/write.

TemplateObject property: NodeTemplate class

Description

This property returns a reference to the template object associated with this node as a content reference.

This property is read-only.

Related Topics

- [Content Reference Class](#)
The content reference class provides access to some kind of content. The type of content depends on the content reference.

NodeTemplate Collection

The NodeTemplate collection contains a set of references to each node template object in a portal.

A NodeTemplate collection is instantiated by the NodeTemplates PortalRegistry property.

See [NodeTemplates property: PortalRegistry class](#).

NodeTemplate Collection Methods

In this section, we discuss the NodeTemplate collection methods. The methods are discussed in alphabetical order.

DeleteItem method: NodeTemplate collection

Syntax

```
DeleteItem(NodeName)
```

Description

The DeleteItem method deletes the NodeTemplate object identified by *NodeName* from the NodeTemplate Collection.

This method is not executed automatically. It is executed only when the PortalRegistry is saved.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of a NodeTemplate to delete.

Returns

A Boolean value: True if the NodeTemplate was deleted, False otherwise.

Example

```
If Not &MyNodeTemplates.DeleteItem("HRMS") Then  
    /* Do error processing */  
End-if
```

First method: NodeTemplate collection

Syntax

```
First()
```

Description

The First method returns the first NodeTemplate object in the NodeTemplate collection.

Parameters

None.

Returns

A NodeTemplate object.

Example

```
&MyNodeTemplate = &MyCollection.First();
```

InsertItem method: NodeTemplate collection

Syntax

```
InsertItem(NodeName)
```

Description

The InsertItem method inserts the NodeTemplate object identified by *NodeName* into the NodeTemplate Collection.

This method is not executed automatically. It is executed only when the PortalRegistry is saved.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of the node template to insert.

Returns

A reference to the new NodeTemplate object if the method executed successfully, NULL otherwise.

Example

```
&NewNodeTemplate = &MyPortal.NodeTemplates.InsertItem("CRM");
```

ItemByName method: NodeTemplate collection

Syntax

```
ItemByName(NodeName)
```

Description

The ItemByName method returns the NodeTemplate object with the name *NodeName*.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of an existing NodeTemplate object in the collection. If you specify an invalid name, the object is NULL.

Returns

A NodeTemplate object if successful, NULL otherwise.

Example

```
&MyNodeTemplate = &MyPortal.NodeTemplates.ItemByName("HRMS");
```

Next method: NodeTemplate collection

Syntax

```
Next()
```

Description

The Next method returns the next NodeTemplate object in the NodeTemplate collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A NodeTemplate object.

Example

```
&MyNodeTemplate = &MyCollection.Next();
```

NodeTemplate Collection Properties

In this section, we discuss the Count property.

Count property: NodeTemplate collection

Description

This property returns the number of NodeTemplate objects in the NodeTemplate Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Folder Class

Folder objects are instantiated from other classes as follows:

- From a PortalRegistry object with the RootFolder property or the FindFolderByName method.
- From a Folder Collection with the First, ItemByName, or Next methods

See [RootFolder property: PortalRegistry class](#), [FindFolderByName method: PortalRegistry class](#), [Folder Collection](#).

See [Adding a Folder](#).

Folder Class Method

In this section, we discuss the Folder class methods. The methods are discussed in alphabetical order.

Save method: Folder class

Syntax

Save()

Description

The Save method saves any changes you made to the folder, for example, a changed description or ValidFrom date.

Using this method also saves any changes you made to PermissionValue (both role-based and non role-based) and AttributeValue objects associated with this folder. Security permissions added are cascade upward until the root folder or first public folder. Removed security permissions are removed from all the parent folders until root or public folder in folder hierarchy.

Parameters

None.

Returns

A Boolean value: True if the Folder object is successfully saved, False otherwise.

Example

```
If Not(&MyFolder.Save()) Then
    /* do error checking */
End-If;
```

Folder Class Properties

In this section, we discuss the Folder class properties. The properties are discussed in alphabetical order.

AbnContentProvider property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return a string representing the node on which the SmartNavigation content resides.

This property is read/write.

AbnDataSource property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return a string indicating whether the SmartNavigation data source is a tree ("T") or a rowset ("R").

This property is read/write.

AbnPeopleCode property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return a string representing the path and PeopleCode object to execute when processing this SmartNavigation folder.

For example, if the PeopleCode program to execute is a method, then AbnPeopleCode property would be constructed from these elements:

```
APP_PACKAGE_NAME.Class_Path.Method
```

For example, if the PeopleCode program to execute is an iScript, then AbnPeopleCode property would be constructed from these elements:

```
RECORD_NAME.FIELD_NAME.PC_Event.Function
```

This property is read/write.

Attributes property: Folder class

Description

This property returns an Attribute Collection containing the AttributeValue objects for this folder.

This property is read-only.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: Folder class

Description

This property returns the author (PeopleSoft user ID) for this folder as a string.

This property is read-only.

AuthorAccess property: Folder class

Description

This property specifies whether the author of the folder has access to the folder. This property takes a Boolean value. The default value for this property for a newly created object is True. This property is not cascaded.

This property is read/write.

Authorized property: Folder class

Description

This property specifies whether the user is authorized to view this Folder.

This property is used when you access a particular Folder using FindFolderByName. If you've specified a valid Folder with this method, a Folder is always returned, whether you are authorized to view it or not. This is the only property you can view from an object that you are not authorized to.

The initial value of this property depends on the other permission properties (PublicAccess and AuthorAccess) and the permission list values in the PermissionValue object associated with this folder.

This property is read-only.

Related Topics

- [FindFolderByName method: PortalRegistry class](#)

CascadedPermissions property: Folder class

Description

This property returns a PermissionValue Collection. This collection contains the value of the non role-based permissions for all the child and parent objects (up to the root folder). To determine only the permissions of the object use the Permission property instead. To determine the role-based permissions of the object use the CascadedRolePermissions property instead.

Note

You *cannot* add any PermissionValue objects to a collection returned by the CascadedPermissions property. You can add values only to the collection returned by the Permissions or RolePermissions property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Folder class](#)
- [PermissionValue Collection](#)
A PermissionValue collection is returned by the following:
- [Permissions property: Folder class](#)

CascadedRolePermissions property: Folder class

Description

This property returns a RolePermissionValue Collection. This collection contains the value of the role-based permissions for all the child and parent objects (up to the root folder). To determine only the role-based permissions of the object use the RolePermission property instead. To determine the non role-based permissions of the object use the CascadedPermissions property.

Note

You *cannot* add any PermissionValue objects to a collection returned by the CascadedRolePermissions property. You can add values only to the collection returned by the Permissions or RolePermissions property.

This property is read-only.

Related Topics

- [CascadedPermissions property: Folder class](#)
- [RolePermissions property: Folder class](#)

- [RolePermissionValue Collection](#)
A RolePermissionValue collection is returned by the following:

ContentRefs property: Folder class

Description

This property returns the ContentReference Collection for this folder.

This property is read-only.

Related Topics

- [Content Reference Collection](#)
The Content Reference Collection provides access to the collection of content references in a Folder object.

CreationDate property: Folder class

Description

This property returns the creation date for this folder as a string.

This property is read-only.

DefaultChartNavigation property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return a Boolean value indicating whether the default PeopleTools chart navigation page (PT_ABN_ORGCHART) is to be used for this folder: True, use the default PeopleTools chart navigation page; False, use the folder specified by the value Folder Navigation Object Name field (from the Folder Administration page) as the navigation object.

This property is read/write.

Description property: Folder class

Description

This property returns or sets the description for this folder as a string.

The length of this property is 256 characters. This property is translatable.

This property is read/write.

Folders property: Folder class

Description

This property returns a reference to the Folder Collection for this folder.

This property is read-only.

Related Topics

- [Folder Collection](#)
The Folder Collection provides access to a collection of folders in a Folder object.

IsMobile property: Folder class

Description

Note

PeopleSoft Mobile Agent is a desupported product. This mobile property currently exists for backward compatibility only.

This property returns True if the folder is used with mobile applications, False otherwise.

This property is read/write.

IsVisible property: Folder class

Description

This property returns True if the Hide from Portal Navigation check box is *not* selected when the folder is created. If the folder is hidden from portal navigation, this property returns False.

Considerations Using IsVisible

If you do not specifically set this property on a new or copied folder, the IsVisible property is set as follows:

- If the ValidFrom date is less then or equal to that day's date, the IsVisible property is set to True.
- If there is no ValidTo date the IsVisible property is set to True.
- If the ValidTo date is greater then or equal to that day's date, the IsVisible property is set to True.

This property is read-only.

Related Topics

- [ValidFrom property: Folder class](#)
- [ValidTo property: Folder class](#)

Label property: Folder class

Description

This property returns or sets the label for this folder as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

Name property: Folder class

Description

This property returns the name for this folder as a sting. The name is a unique identifier for each folder.

Every folder name must be unique across the portal, not just in the parent folder.

This property is *not* translatable. However, the values for the Label and Description properties are translatable.

This property is read-only.

Related Topics

- [Description property: Folder class](#)
- [Label property: Folder class](#)

OwnerId property: Folder class

Description

This property returns the name of the owner for this folder as a string.

This property is read/write.

ParentName property: Folder class

Description

This property returns the parent folder name for this folder as a string. This property is valid only if the folder is contained within another folder. If the folder using this property is the root folder, this property returns an empty string.

This property is read-only.

Path property: Folder class

Description

The Path property returns a path to this folder, with each element of the path separated by a period. The path has the following syntax:

```
FolderLabel{Name}.[ChildFolderLabel{Name}]. . .
```

This property is read-only.

Example

```
Departments{PORTA_ROOT_OBJECT}.HR{EastCoast}.AdministerWorkforce{Global}
```

Permissions property: Folder class

Description

This property returns a `PermissionValue` Collection. This collection contains the value of the non role-based permissions for this folder. To determine the permissions for all the parent objects (up to the root folder) use the `CascadedPermissions` property. To access the role-based permissions, use the `RolePermissions` property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [CascadedPermissions property: Folder class](#)
- [RolePermissionValue Collection](#)
A `RolePermissionValue` collection is returned by the following:

Product property: Folder class

Description

This property returns or sets the PeopleSoft product for this folder as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: Folder class

Description

This property indicates whether a folder is generally accessible, that is, if this property is set to `True`, any user can access the folder. This property is not cascaded.

This property takes a Boolean value.

The default value for this property for a newly created object is `False`.

This property is read/write.

RolePermissions property: Folder class

Description

This property returns a RolePermissionValue Collection. This collection contains the value of the role-based permissions for this folder. To determine the role-based permissions for all the parent objects (up to the root folder) use the CascadedRolePermissions property. To access the non role-based permissions, use the Permissions property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Folder class](#)
 - [Permissions property: Folder class](#)
 - [RolePermissionValue Collection](#)
- A RolePermissionValue collection is returned by the following:

SequenceNumber property: Folder class

Description

The sequence number is used when returning a collection. The default order of the returned folders is based on the sequence number. Use this property to reorder folders.

If there are duplicates in the sequence number, the folders are returned alphabetically.

The length of this property is 4 characters.

This property is read/write.

TreeEffectiveDate property: Folder class

Description

① Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return the effective date for the tree to be used as the SmartNavigation data source as a string.

① Note

If the SmartNavigation data source is a rowset, this property is set to the Null string.

This property is read/write.

TreeName property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return the name for the tree to be used as the SmartNavigation data source as a string.

Note

If the SmartNavigation data source is a rowset, this property is set to the Null string.

SmartNavigation passes the values of several tree-specific fields to the application via URL. Certain characters are inappropriate for use in a URL and must be avoided. When using a tree as a SmartNavigation data source, do not use any of the following characters in the tree name, setID, user key value, and tree branch values:

pound (#)	percent (%)	dollar (\$)
ampersand (&)	plus (+)	comma (,)
forward slash/virgule (/)	colon (:)	semi-colon (;)
equals (=)	question mark (?)	at symbol (@)
space ()	quotation marks(")	less than symbol (<)
greater than symbol (>)	left curly brace ({)	right curly brace (})
vertical bar/pipe ()	backslash (\)	caret (^)
tilde (~)	left square bracket ([)	right square bracket (])
grave accent (`)		

This property is read/write.

TreeSetId property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return the setID for the tree to be used as the SmartNavigation data source as a string.

Note

If the SmartNavigation data source is a rowset, this property is set to the Null string.

SmartNavigation passes the values of several tree-specific fields to the application via URL. Certain characters are inappropriate for use in a URL and must be avoided. When using a tree as a SmartNavigation data source, do not use any of the following characters in the tree name, setID, user key value, and tree branch values:

pound (#)	percent (%)	dollar (\$)
ampersand (&)	plus (+)	comma (,)
forward slash/virgule (/)	colon (:)	semi-colon (;)
equals (=)	question mark (?)	at symbol (@)
space ()	quotation marks(")	less than symbol (<)
greater than symbol (>)	left curly brace ({)	right curly brace (})
vertical bar/pipe ()	backslash (\)	caret (^)
tilde (~)	left square bracket ([)	right square bracket (])
grave accent (`)		

This property is read/write.

TreeStructureName property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return the branch for the tree to be used as the SmartNavigation data source as a string.

Note

If the SmartNavigation data source is a rowset, this property is set to the Null string.

SmartNavigation passes the values of several tree-specific fields to the application via URL. Certain characters are inappropriate for use in a URL and must be avoided. When using a tree as a SmartNavigation data source, do not use any of the following characters in the tree name, setID, user key value, and tree branch values:

pound (#)	percent (%)	dollar (\$)
ampersand (&)	plus (+)	comma (,)
forward slash/virgule (/)	colon (:)	semi-colon (;)
equals (=)	question mark (?)	at symbol (@)
space ()	quotation marks(")	less than symbol (<)
greater than symbol (>)	left curly brace { }	right curly brace { }
vertical bar/pipe ()	backslash (\)	caret (^)
tilde (~)	left square bracket ([)	right square bracket (])
grave accent (`)		

This property is read/write.

TreeUserKeyValue property: Folder class

Description

Note

SmartNavigation has been desupported. This property remains for backward compatibility only.

Use this property to set or return the user key value (also known as the set control value) for the tree to be used as the SmartNavigation data source as a string.

Note

If the SmartNavigation data source is a rowset, this property is set to the Null string.

SmartNavigation passes the values of several tree-specific fields to the application via URL. Certain characters are inappropriate for use in a URL and must be avoided. When using a tree as a SmartNavigation data source, do not use any of the following characters in the tree name, setID, user key value, and tree branch values:

pound (#)	percent (%)	dollar (\$)
ampersand (&)	plus (+)	comma (,)
forward slash/virgule (/)	colon (:)	semi-colon (;)
equals (=)	question mark (?)	at symbol (@)
space ()	quotation marks(")	less than symbol (<)
greater than symbol (>)	left curly brace { }	right curly brace { }
vertical bar/pipe ()	backslash (\)	caret (^)
tilde (~)	left square bracket ([)	right square bracket (])
grave accent (`)		

This property is read/write.

ValidFrom property: Folder class

Description

This property returns or sets the date this folder is valid from as a string.

This property is read/write.

ValidTo property: Folder class

Description

This property returns or sets the date this folder is valid until as a string.

This property is read/write.

Note

The portal registry API never uses the ValidTo and ValidFrom fields to determine what to return in a collection. You must check for these values in your application.

Folder Collection

The Folder Collection provides access to a collection of folders in a Folder object.

The Folder Collection is instantiated from the Folders Folder Class property.

See [Folders property: Folder class](#).

Folder Collection Methods

In this section, we discuss the Folder collection methods. The methods are discussed in alphabetical order.

DeleteItem method: Folder collection

Syntax

```
DeleteItem(FolderName)
```

Description

The DeleteItem method deletes the folder object identified by *FolderName* from the database. If the folder contains other folders, all child folders and their contents are also deleted.

⚠ Warning

If you delete a folder, you delete *all* content in the folder. If you delete a folder that contains other folders, that is, a parent folder, all the child folders, and all the content references are deleted.

📘 Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database *as soon* as the method is executed.

Parameters

Parameter	Description
<i>FolderName</i>	Specify the name of a folder existing in the folder collection.

Returns

A Boolean value: True if the folder was deleted, False otherwise.

Example

```
If Not &MyFolderColl.DeleteItem("MYFOLDER") Then
    /* Folder not deleted. Do error checking */
End-If;
```

First method: Folder collection

Syntax

First()

Description

The First method returns the first Folder object in the folder collection.

Parameters

None.

Returns

Folder object.

Example

```
&MyFolder = &MyCollection.First();
```

InsertItem method: Folder collection

Syntax

```
InsertItem(FolderName, Label)
```

Description

The InsertItem method inserts the folder object identified by *FolderName* from the Folder Collection. You must specify both a name and a label for all folders. This method returns a reference to the new folder object. You must specify a unique *FolderName*, or you receive an error.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted into the database as *soon* as the method is executed.

Parameters

Parameter	Description
<i>FolderName</i>	Specify the name of a folder existing in the folder collection. This parameter takes a string value.
<i>Label</i>	Specify a label for the new folder. This parameter takes a string value.

Returns

A reference to the new Folder object if the method executed successfully, null otherwise.

Example

```
&DepthHPFldr = &MyPortal.Folders.InsertItem("PORT0145", "HR Folder for  
Department⇒  
0145");
```

ItemByName method: Folder collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the Folder object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing folder within the folder collection. If you specify an invalid name, the object is NULL. You must specify a name, not a label.

Returns

A folder object if successful, NULL otherwise.

Example

```
&DeptFldr = &MyPortal.RootFolder.Folders.ItemByName(&Dept_Name);
```

Next method: Folder collection

Syntax

```
Next()
```

Description

The Next method returns the next Folder object in the Folder collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A folder object.

Example

```
Local ApiObject &MySession, &Root, &Folders, &MyFolder;
```

```
&MySession = %Session;  
&MyPortal = &MySession.GetPortalRegistry("ADMIN");
```

```
&Root = &MyPortal.GetRoot();  
&Folders = &Root.Folders;
```

```
&MyFolder = &Folders.First();
```

```
For &I = 1 to &Folders.Count  
  /* Do processing on folders */  
  If &I <> &Folders.Count  
    &MyFolder = &Folders.Next();
```

```
End-If;  
End-For;
```

Folder Collection Property

In this section, we discuss the Count property.

Count property: Folder collection

Description

This property returns the number of Folder objects in the Folder Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Content Reference Class

The content reference class provides access to some kind of content. The type of content depends on the content reference.

The content reference objects are instantiated from other classes:

- From a PortalRegistry object with the FindCRefByURL, FindCRefForURL, or FindCRefByName properties.
- From a Content Reference Collection (instantiated from a folder) with the First, ItemByName or Next methods

See [FindCRefByURL method: PortalRegistry class](#), [FindCRefByName method: PortalRegistry class](#), [FindCRefForURL method: PortalRegistry class](#), [Content Reference Collection](#).

See [Adding a Content Reference](#).

Content Reference Class Methods

In this section, we discuss the Content Reference class methods. The methods are discussed in alphabetical order.

CreateLink method: Content Reference class

Syntax

```
CreateLink(LinkName, Label)
```

Description

Use the CreateLink method to create a link quickly to the same content reference executing the method. The link by defaults assumes the parent folder is the same as the content reference's parent.

A CRefLink object is returned if there is no error.

After you create a link you must use the Save method to save it to the database.

Parameters

Parameter	Description
<i>LinkName</i>	Specify the name of the link as a string. This parameter takes 30 characters. This is considered as ID of the link. It cannot start with number, and can not have special characters and spaces.
<i>Label</i>	Specify the label of the link as a string. This parameter takes 30 characters.

Returns

A reference to a ContentReference link object.

Example

```
&CRef = &Portal.FindCRefByName("MyCRef");  
&Link = &CRef.CreateLink("Link Object");  
&Link.Save();
```

Related Topics

- [Link Class](#)
A Link object is returned by the First and Next Link collection methods.
- [Save method: Content Reference Link class](#)

Save method: Content Reference class

Syntax

```
Save( )
```

Description

The Save method saves any changes you made to the content reference, for example, a changed description. It also performs some validation.

Using this method also saves any changes you made to PermissionValue or AttributeValue objects associated with this content reference.

Parameters

None.

Returns

A Boolean value: True if the content reference and its associated objects saved successfully, False otherwise.

Example

```
If NOT(&MyCRef.Save()) Then
    /* save failed, do error processing */
End-If;
```

Content Reference Class Properties

In this section, we discuss the Content Reference class properties. The properties are discussed in alphabetical order.

Related Topics

- Portal Technology: Defining Content References
- Portal Technology: Setting Content Reference Permissions
- Portal Technology: Setting Fluid Attributes for Content References

AbsoluteContentURL property: Content Reference class

Description

This property returns the complete URL to the content from the content servlet (psc).

Use the URL property to return a partial URL beginning with the content type—that is, minus the portal URI text, portal name, and node name.

This property is read-only.

Example

The following is an example absolute content URL:

```
http://myserver.example.com:8000/psc/t56dp812x/EMPLOYEE/CRM/c/
PTGP_MENU.PTGP_USERPREF_FL.GBL
```

Related Topics

- [URL property: Content Reference class](#)

AbsolutePortalURL property: Content Reference class

Description

This property returns the complete URL to the content from the portal servlet (psp).

This property is read-only.

Example

```
http://myserver.example.com:8000/psp/t56dp812x/EMPLOYEE/CRM/c/
PTGP_MENU.PTGP_USERPREF_FL.GBL
```

AssignedPagelets property: Content Reference class

Description

This property returns an AssignedPagelet collection.

This property is read-only.

Related Topics

- [AssignedPagelet Collection](#)
An AssignedPagelet collection is returned by the AssignedPagelet TabDefinition method.

AssignedSections property: Content Reference class

Description

This property returns an AssignedSections collection.

This property is read-only.

Attributes property: Content Reference class

Description

This property returns an Attribute Collection containing the AttributeValues for this content reference object.

This property is read-only.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: Content Reference class

Description

This property returns the author (PeopleSoft user ID) for this content reference object as a string.

This property is read-only.

AuthorAccess property: Content Reference class

Description

This property specifies whether the author of the content reference has access to the content reference. This property takes a Boolean value. The default value for this property is True.

This property is read/write.

Authorized property: Content Reference class

Description

This property specifies whether the user is authorized to view this content reference.

This property is used when you access a particular content reference using `FindCRefByURL`, `FindCRefForURL`, or `FindCRefByName`. If you specified a valid content reference with either of these methods, a content reference is always returned, whether you are authorized to view it or not. This is the only property you can view from an object for which you are not authorized.

The initial value of this property depends on the other permission properties (`PublicAccess` and `AuthorAccess`) and the permission list values in the `PermissionValue` object associated with this content reference.

This property is read-only.

Related Topics

- [FindCRefByURL method: PortalRegistry class](#)
- [FindCRefForURL method: PortalRegistry class](#)
- [FindCRefByName method: PortalRegistry class](#)

CascadedPermissions property: Content Reference class

Description

This property returns a `PermissionValue` Collection. This collection contains the value of the non role-based permissions for all the parent objects (up to the root folder). To determine only the permissions of the object use the `Permissions` property instead. To access the role-based permissions, use the `CascadedRolePermissions` property.

Note

You *cannot* add any `PermissionValue` objects to a collection returned by the `CascadedPermissions` property. You can add values only to the collection returned by the `Permissions` property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Content Reference class](#)
- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [Permissions property: Content Reference class](#)

CascadedRolePermissions property: Content Reference class

Description

This property returns a RolePermissionValue Collection. This collection contains the value of the role-based permissions for all the parent objects (up to the root folder). To determine only the permissions of the object use the RolePermissions property instead. To determine non role-based permissions, use the CascadedPermissions property.

Note

You *cannot* add any RolePermissionValue objects to a collection returned by the CascadedRolePermissions property. You can add values only to the collection returned by the RolePermissions property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Content Reference class](#)
- [RolePermissions property: Content Reference class](#)
- [RolePermissionValue Collection](#)

A RolePermissionValue collection is returned by the following:

ContentProvider property: Content Reference class

Description

This property returns or sets the name of the node for the content reference as a string.

This property takes the following values:

Value	Description
Node name	Specify the exact name of the node.
LOCAL_NODE	Specify the node for the content reference as the node defined as the default local node.

This property is read/write.

CreationDate property: Content Reference class

Description

This property returns the creation date for this content reference object as a string.

This property is read-only.

Data property: Content Reference class

Description

This property returns the data for this content reference. This property is valid only when the `StorageType` property is `LOCL`.

The length of this property depends on your system database limit for `LONG` fields.

This property is read/write.

Example

```
&MyData = &MyCRef.Data;
```

Related Topics

- [StorageType property: Content Reference class](#)

Description property: Content Reference class

Description

This property returns or sets the description for this content reference object as a string.

The length of this property is 256 characters.

This property is translatable.

This property is read/write.

DisplayIn property: Content Reference class

Description

Use the `DisplayIn` property to set or return a number value representing how the target transaction or content appears once a user taps the tile.

Use the following integer constants (integer values are provided for reference only):

Numeric Value	Constant Value	Description
0	<code>%GroupletActionInCurrent Window</code>	Display the content in the current browser window.
1	<code>%GroupletActionInNewWin dow</code>	Display in a new browser window.
2	<code>%GroupletActionInModal</code>	Display in a modal window.
3	<code>%GroupletActionNavBarGr ouplet</code>	Display in the NavBar (used by NavBar tiles only).
4	<code>%GroupletActionNavrBarU rlInCurrentWindow</code>	Display in the current browser window (used by NavBar tiles only).
6	<code>%GroupletActionAGTargetF luid</code>	Display the fluid component within the activity guide.

Numeric Value	Constant Value	Description
7	%GroupletActionMDTarget Fluid	Display the fluid component within the master/detail target area.
8	%GroupletActionMDTarget Classic	Display the classic component within the master/detail target area.
9	%GroupletActionAGTargetClassic	Display the classic component within the activity guide.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- [SetGroupletDisplayIn method: Field class](#)

DisplayModalParams property: Content Reference class

Description

Use the DisplayModalParams property to set or return a string value representing the custom modal options.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- Fluid User Interface Developer's Guide: Modal Options
- [SetGroupletMOptions method: Field class](#)

EventName property: Content Reference class

Description

Use the EventName property to set or return a string value representing the name of a push notification event used to dynamically update the tile's content.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- Fluid User Interface Developer's Guide: Understanding the Push Notification Framework
- Fluid User Interface Developer's Guide: Defining Events
- [SetGroupletEventMsg method: Field class](#)

GroupletAltHeight property: Content Reference class

Description

Use the GroupletAltHeight property to set or return a number value representing the alternate height for a resizable tile.

i Note

If either GroupletAltHeight or GroupletAltWidth is a non-zero value, then the tile is assumed to be resizable. There is no specific property to set the tile as resizable.

This property is read/write.

! Important

Use this property within fluid applications only.

GroupletAltWidth property: Content Reference class

Description

Use the GroupletAltWidth property to set or return a number value representing the alternate width for a resizable tile.

i Note

If either GroupletAltHeight or GroupletAltWidth is a non-zero value, then the tile is assumed to be resizable. There is no specific property to set the tile as resizable.

This property is read/write.

! Important

Use this property within fluid applications only.

GroupletAutoSize property: Content Reference class

Description

Use the GroupletAutoSize property to set or return a Y/N string value indicating whether to allow the fluid content to dynamically resize itself based on the size of the content. Note the following conditions and limitations with respect to the autosize option:

- The autosize option pertains to tiles and related information, but not to embedded related content.
- The autosize option is best used on dashboards with few tiles. Be aware that layout changes can occur from the autosized content.
- Autosize automatically accounts for resizing of the browser and rotation of the device.
- The autosize and resizable options are mutually exclusive; both cannot be selected simultaneously.
- The tile will not resize itself to larger than the dimensions of the device.
- If the content is larger than the size of the tile, the tile will display scroll bars.
- Due to the same-origin policy implemented by web browsers, for the autosize option to work with external content, the external content and the PeopleSoft application must either reside within the same domain or they must both set the document.domain property to the same value. Otherwise, the autosize option is ignored. For more information on how the domain and same-origin is determined, see [Same-origin policy](#).

This property is read/write.

! Important

Use this property within fluid applications only.

Example

```
If &CRef.GroupletAutoSize = "Y" Then
    &CRef.GroupletAltHeight = 0;
    &CRef.GroupletAltWidth = 0;
End-If;
```

GroupletContentProvider property: Content Reference class

Description

Use the GroupletContentProvider property to set or return a string value representing the local or remote node name for the dynamic tile content.

This property is read/write.

! Important

Use this property within fluid applications only.

GroupletContentURL property: Content Reference class

Description

Use the GroupletContentURL property to set or return a string value representing the full URL to the dynamic tile content. Use the GroupletURL property to return a partial URL beginning with the content type—that is, minus the portal URI text, portal name, and node name.

i Note

When the dynamic tile content type is none (that is, GroupletURLType is NONE), this property returns an empty string.

This property is read/write.

! Important

Use this property within fluid applications only.

Example

For example:

```
http://myserver.example.com:8000/psc/t56dp812x/EMPLOYEE/QEDM0/s/  
WEBLIB_PTNUI.FUNCLIB.FieldFormula.IScript_GroupletDiag
```

Related Topics

- [GroupletURL property: Content Reference class](#)
- [GroupletURLType property: Content Reference class](#)
- [SetGroupletUrl method: Field class](#)

GroupletDisableHotspot property: Content Reference class

Description

Use the GroupletDisableHotspot property to set or return a Y/N string value indicating whether to disable displaying the target content defined for the tile when the tile is tapped. However, any links displayed dynamically within the tile are not disabled.

This property is read/write.

! Important

Use this property within fluid applications only.

GroupletHeight property: Content Reference class

Description

Use the GroupletHeight property to set or return a number value representing the height of the tile.

The default dimensions of a tile are 1 tile unit by 1 tile unit. Tiles up to 8x8 are supported. Note the following conditions and limitations with respect to the height and width of a tile:

- A tile can never be larger than the width of the device. For example, if the width of a device is 2 in portrait mode, and 3 in landscape; the tile can only be maximum of width 2 on this device.
- The valid size is checked only when the tile is initially loaded. If the device is rotated, or if the browser is resized, the tile is not resized.
- Any tile sized larger than 2x2 is not guaranteed to display at the specified size depending on the device used to access the PeopleSoft system. For example, a 4x4 tile on a small form factor device in portrait mode would only show as a 2x3 tile.
- Therefore, tiles larger than 2x2 need to implement variable sizing to accommodate different device sizes. Use large size tiles sparingly.

This property is read/write.

! Important

Use this property within fluid applications only.

GroupletId property: Content Reference class

Description

If applicable, use the GroupletId property to set or return an optional string value representing the ID of the specific group box from which the content is rendered. Use the page field name as defined on the General tab of the group box definition.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- [SetGroupletID method: Field class](#)

GroupletImageName property: Content Reference class

Description

Use the GroupletImageName property to set or return a string value specifying an image (in SVG format only) from the database to display a custom static image as the fluid content. Otherwise the default image is displayed.

Note

When dynamic content is also configured for a tile, this static image is displayed only until the dynamic content is loaded.

This property is read/write.

Important

Use this property within fluid applications only.

Related Topics

- [SetGroupletImage method: Field class](#)

GroupletPageName property: Content Reference class

Description

Use the GroupletPageName property to set or return a string value representing the fluid page name. This property is valid only when the dynamic tile content is specified as PeopleSoft Component.

Note

Because multi-page components are not recommended as dynamic content, the page name is not required.

This property is read/write.

Important

Use this property within fluid applications only.

GroupletTimer property: Content Reference class

Description

Use the GroupletTimer property to set or return a number value representing the refresh timer for this tile.

Enter the time in seconds to set an automatic refresh period for dynamic content on a tile. When the timer limit has been reached, the system re-draws the tile so that it displays the current data, such as in the case with chart.

The default value of 0 disables any automatic refresh.

Note

The system enforces a 10 second minimum limit. Any value entered less than 10 seconds is ignored and is treated as 10 seconds. When setting this value, be sure to monitor performance of the page refreshes and adjust accordingly.

This property is read/write.

Important

Use this property within fluid applications only.

Related Topics

- [SetGroupletTimer method: Field class](#)

GroupletType property: Content Reference class

Description

Use the GroupletType property to set or return a number value representing the type of grouplet.

A grouplet is the encapsulation of content from one source (for example, a component, an iScript, or external content) that is presented within the context of another fluid application page. Tiles, embedded related content, and related information are all examples of grouplets. In each of these scenarios, the grouplets are created by the system at runtime based solely on configuration details. However, you can use this and other methods and properties of the Field class to generate grouplets from group box fields programmatically.

Use the following integer constants (integer values are provided for reference only):

Numeric Value	Constant Value	Description
0	%GroupletNone	Not a grouplet (also referred to as a tile). This is a regular group box with its content coming from the same page records.

Numeric Value	Constant Value	Description
1	%GroupletWithStyle	Grouplet with style. This producer tile includes its own style sheets, JavaScript, or both. Important: Be aware that this setting can inject style settings or JavaScript code that conflicts with those defined for the page.
2	%GroupletNoStyle	Grouplet without style. This producer tile does not include style sheets or JavaScript. Note: This is the recommended setting.
3	%GroupletIframe	Interactive grouplet.
4	%GroupletIframeExt	Interactive grouplet for external content.
5	%GroupletIframeAutoSize	Interactive grouplet with autosizing. Note: Use this setting for homepage and dashboard tiles only.
6	%GroupletIframeExtAutoSize	Interactive grouplet for external content with autosizing. Note: Use this setting for homepage and dashboard tiles only.
7	%GroupletIframeVAutoSize	Interactive grouplet with vertical autosizing. The system will autosize the grouplet height based on the content at initial load. The grouplet will be automatically resized by the system when: • The window is resized. • Any field change or server trip is invoked within the grouplet. • Any group boxes within the grouplet are expanded or collapsed. • When either side panel is opened or closed.

This property is read/write.

Important

Use this property within fluid applications only.

Related Topics

- [SetGroupletType method: Field class](#)

GroupletURL property: Content Reference class

Description

Use the GroupletURL property to set or return a string value representing a partial URL to the dynamic tile content. This partial URL begins with the content type—that is, it does not include the portal URI text, portal name, and node name. Use the GroupletContentURL property to return the full URL.

Note

When the dynamic tile content type is none (that is, GroupletURLType is NONE), this property returns an empty string.

This property is read/write.

Important

Use this property within fluid applications only.

Example

For example:

```
s/WEBLIB_PTUI.FUNCLIB.FieldFormula.IScript_GroupletDiag
```

Related Topics

- [GroupletContentURL property: Content Reference class](#)
- [GroupletURLType property: Content Reference class](#)

GroupletURLType property: Content Reference class

Description

Use the GroupletURLType property to set or return a string value representing the URL type for the dynamic tile content.

String Value	Description
NONE	No dynamic tile content.
UEXT	Non-PeopleSoft URL.
UGEN	PeopleSoft Generic URL.
UPGE	PeopleSoft Component.
USCR	PeopleSoft iScript.

This property is read/write.

Important

Use this property within fluid applications only.

GroupletWidth property: Content Reference class

Description

Use the GroupletWidth property to set or return a number value representing the width of the tile

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- [GroupletHeight property: Content Reference class](#)

HasGrouplet property: Content Reference class

Description

Use the HasGrouplet property to set or return a boolean value indicating whether any of the properties have been set on the Fluid Attributes page of the content reference definition.

This property is read/write.

! Important

Use this property within fluid applications only.

HtmlText property: Content Reference class

Description

This property returns the HTML text associated with this content reference as a string.

This property is read-only.

IsFluid property: Content Reference class

Description

Use the IsFluid property to set or return a boolean value indicating whether fluid mode is enabled for this content reference. For *local* component-based fluid content, this setting is maintained on the component definition in Application Designer; do not reset the property in PeopleCode.

Otherwise, programmatically specify fluid mode only for:

- iScript based URLs.

- Generic PeopleSoft URLs.
- *Remote* component-based fluid content.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- PeopleCode Language Reference: IsFluidMode function

IsMobile property: Content Reference class

Description

i Note

PeopleSoft Mobile Agent is a desupported product. This mobile property currently exists for backward compatibility only.

This property returns True if this content reference is used with mobile applications, False otherwise.

This property is read/write.

IsSmallFFOptimized property: Content Reference class

Description

Use the IsSmallFFOptimized property to set or return a boolean value indicating whether the tile for this content reference definition has been designated to display on small form factor devices such as smart phones. If this property is False, this tile will not be available when the user is signed in on small form factor devices.

For *local* component-based fluid content, this setting is maintained on the component definition in Application Designer; do not reset the property in PeopleCode.

This property is read/write.

! Important

Use this property within fluid applications only.

Related Topics

- PeopleCode Language Reference: IsSmallFFOptimized function

IsVisible property: Content Reference class

Description

This property returns True if the Hide from Portal Navigation check box is not selected when the content reference is created. If the content reference is hidden from portal navigation, this property returns False.

Considerations Using IsVisible

If you do not specifically set this property on a new or copied content reference object, the IsVisible property is set as follows:

- If the ValidFrom date is less than or equal to that day's date, the IsVisible property is set to True.
- If there is no ValidTo date the IsVisible property is set to True.
- If the ValidTo date is greater than or equal to that day's date, the IsVisible property is set to True.

This property is read-only.

Related Topics

- [ValidFrom property: Content Reference class](#)
- [ValidTo property: Content Reference class](#)

Label property: Content Reference class

Description

This property returns or sets the label for this content reference object as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

Links property: Content Reference class

Description

This property returns a reference to a Link collection. This collection contains all the links that are associated with this content reference.

This property is read-only. However, a link collection is updated in real time when a new link is created on the object.

Related Topics

- [Link Collection](#)
A Links collection is returned by the Links content reference property.

Name property: Content Reference class

Description

This property returns the name for this content reference object as a string. The name is a unique identifier for each content reference object.

Every content reference name must be unique in the portal, not just in the parent folder.

This property is read-only.

OwnerId property: Content Reference class

Description

This property returns or sets the owner ID of the content reference object as a string.

This property is read/write.

ParentName property: Content Reference class

Description

This property returns the parent folder name for this content reference object as a string.

This property is read-only.

Example

The following example uses the ParentName to return a folder object for the content reference.

```
&Folder = &Portal.FindFolderByName(&CRef.ParentName);
```

Path property: Content Reference class

Description

The Path property returns a path to this content reference, with each element of the path separated by a period. The path has the following syntax:

```
ContentReferenceLabel{Name}.[ChildContentReferenceLabel{Name}]. . .
```

This property is read-only.

Permissions property: Content Reference class

Description

This property returns a PermissionValue Collection. This collection contains the value of the non role-based permissions for this content reference. To determine the permissions for all the parent objects (up to the root folder) use the CascadedPermissions property.

If you want to find role-based permissions for the content reference, use the RolePermission property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A PermissionValue collection is returned by the following:
- [CascadedPermissions property: Content Reference class](#)
- [CascadedPermissions property: Content Reference class](#)

Product property: Content Reference class

Description

This property returns or sets the PeopleSoft product for this content reference object as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: Content Reference class

Description

This property indicates whether a content reference is generally accessible, that is, if it will always be included in the general content reference collection. This property takes a Boolean value.

The default value for this property is False.

This property is read/write.

QualifiedURL property: Content Reference class

Description**Note**

This property is being kept for backward compatibility only. If your code uses this property, the value returned is actually from the AbsoluteContentURL property. New applications should use the AbsoluteContentURL property instead.

Related Topics

- [AbsoluteContentURL property: Content Reference class](#)

RelativeURL property: Content Reference class

Description

This property returns the relative URL in the following format:

`../../../../PORTAL/NODE/content_type/CONTENT`

The following is an example of a full URL:

```
http://myserver.example.com:8000/psc/t56dp812x/EMPLOYEE/CRM/c/  
PTGP_MENU.PTGP_USERPREF_FL.GBL
```

The RelativeURL property returns the following:

```
../../../../EMPLOYEE/CRM/c/PTGP_MENU.PTGP_USERPREF_FL.GBL
```

This property is read-only.

Related Topics

- [AbsoluteContentURL property: Content Reference class](#)

RolePermissions property: Content Reference class

Description

This property returns a RolePermissionValue Collection. This collection contains the value of the role-based permissions for this content reference. To determine the permissions for all the parent objects (up to the root folder) use the CascadedRolePermissions property.

If you want to find non role-based permissions for the content reference, use the Permission property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Content Reference class](#)
- [Permissions property: Content Reference class](#)
- [RolePermissionValue Collection](#)

A RolePermissionValue collection is returned by the following:

SequenceNumber property: Content Reference class

Description

The sequence number is used when returning a collection. The default order of the returned content references is based on the sequence number. Use this property to reorder content references. This property takes a number value.

If there are duplicates in the sequence number, the content references are returned alphabetically.

The length of this property is 4 characters.

This property is read/write.

StorageType property: Content Reference class

Description

In general, content references contain information about where to get the content, and do not store the content. However, content references that are template or portal component types

can have their content accessible directly from the content reference. In these cases, the Data property is valid and can be read or written, and the data is stored locally in the portal database.

StorageType	Meaning
LOCL	Local: Data property on content reference is valid.
RMTE	Remote: Data property is not valid.

When UsageType is a target this property must be set to RMTE and the URLType property should specify what format the Node and URL are in.

When UsageType is either a template or a portal component this property can be set to either LOCL or RMTE.

Note that when StorageType is LOCL, it specifies a static template or portal component. But, when StorageType is RMTE it can specify either:

- a dynamically generated template or portal component
- a static template or portal component

In both cases, the Node and URL properties specifies how to get the template or portal component.

Only templates and homepage tab content references can have StorageType LOCL. The StorageType is always LOCL for homepage tabs. For templates LOCL means that corresponding URL is stored in database, not retrieved by URL.

The following table indicates the usage type, and what type of storage is available.

UsageType	RMTE	LOCL
FRMT (Frame template)	X	X
HTMT (HTML template)	X	X
HPGT (Homepage tab)		X
HPGC (Pagelet)	X	
TARG (Target)	X	

RMTE is the default value for a new content reference.

The length of this property is 4 characters.

This property is read/write.

Related Topics

- [Data property: Content Reference class](#)

Template property: Content Reference class

Description

This property returns or sets the name of the template used with this content reference as a string. You must specify the name of an existing template.

This property uses the name *not* the label of a content reference.

This property is used only when the UsageType property is specified as Target (TARG) and the TemplateType property is specified as HTML.

To return a reference to the content reference that contains the template specified by this property, use the TemplateObject property.

The length of this property is 30 characters.

This property is read/write.

Related Topics

- [UsageType property: Content Reference class](#)
- [TemplateType property: Content Reference class](#)
- [TemplateObject property: Content Reference class](#)

TemplateObject property: Content Reference class

Description

This property returns a reference to a content reference object that contains the template specified by the Template property as a content reference. If no template is specified with Template, this property returns NULL.

This property is read-only.

Related Topics

- [Template property: Content Reference class](#)

TemplateType property: Content Reference class

Description

This property indicates whether a template should be used to wrap the content. This property takes a string value.

Values are:

Value	Description
HTML	An HTML template should wrap the data (URL) in the content reference.
NONE	No template should be used. The text should not be wrapped.

HTML is the default value on a new content reference.

Use the NONE value if the URL should not appear in the portal. An example is when the content reference is a template itself.

If the homepage template for the user is un-retrievable, the system tries to use the default user's template first, before resorting to the portal default template.

When the content reference describes content, this property should be set to HTML.

This property is read/write.

Related Topics

- [Using Content References](#)

Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

URL property: Content Reference class

Description

Use this property to set or return the partial URL to the content. This partial URL begins with the content type—that is, it does not include the portal URI text, portal name, and node name.

Use the `AbsoluteContentURL` property to return the full URL.

This property is read/write.

Example

The following is an example the URL property:

```
c/PTGP_MENU.PTGP_USERPREF_FL.GBL
```

Related Topics

- [AbsoluteContentURL property: Content Reference class](#)

URLType property: Content Reference class

Description

This property indicates what kind of URL is used to retrieve the content. This property takes a string value.

Note

This property is used only for content that has the `StorageType` property set as `Remote`.

Values are:

URLType Value	Meaning
UEXT	URL points to a non-PeopleSoft (external) URL
UMPG	URL points to a PeopleSoft mobile page
UPGE	URL points to a component.
UPHP	URL points to a homepage tab
UPTM	URL points to a template
USCR	URL points to an iScript
UGEN	URL points to a generic PeopleSoft URL
WRKL	URL points to a Worklist URL

UPGE is the default value on a new content reference.

This property is read/write.

Related Topics

- [StorageType property: Content Reference class](#)

UsageType property: Content Reference class

Description

This property indicates what the content reference is used for. Several other properties depend on this property.

This property takes a string value.

The length of this property is 4 characters.

Value	Description
FRMT	Frame template: the content reference is a frame-based template.
HTMT	HTML template: the content reference is an HTML template.
HPGT	Homepage tab: the content reference is a homepage tab.
HPGC	Pagelet: the content reference is a pagelet used in the homepage.
TARG	Target: the content reference is the target content its template determines what else must be loaded and how it will look.
LINK	Link: the content reference is a link.

TARG is the default value on a new content reference.

This property is read/write.

Related Topics

- [Using Content References](#)
Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

ValidFrom property: Content Reference class

Description

This property returns or sets the date this content reference is valid from as a string.

This property is read/write.

ValidTo property: Content Reference class

Description

This property returns or sets the date this content reference is valid until as a string.

This property is read/write.

Note

The portal registry API never uses the ValidTo and ValidFrom fields to determine what to return in a collection. You must check for these values in your application.

Content Reference Collection

The Content Reference Collection provides access to the collection of content references in a Folder object.

The Content Reference Collection is instantiated from the ContentRefs Folder property.

See [ContentRefs property: Folder class](#).

Content Reference Collection Methods

In this section, we discuss the Content Reference collection methods. The methods are discussed in alphabetical order.

DeleteItem method: Content Reference collection

Syntax

```
DeleteItem(ContentReferenceName)
```

Description

The DeleteItem method deletes the content reference object identified by *ContentReferenceName* from the content reference Collection.

If you delete a template for a content reference, and none of the other content references on a page have a template, the default template specified with the ContentProvider is used. If there's no template for the ContentProvider, the template for the PortalRegistry is used. However, if you delete the template for the content reference, the ContentProvider, and the PortalRegistry, you receive a runtime error.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database as soon as the method is executed.

Parameters

Parameter	Description
<i>ContentReferenceName</i>	Specify the name of a content reference existing in the content reference collection.

Returns

A Boolean value: True if the content reference was deleted, False otherwise.

Example

```
If Not &MyCRef.DeleteItem("Test_CRef") Then
    /* can't delete test data. Do error processing */
End-if;
```

First method: Content Reference collection

Syntax

First()

Description

The First method returns the first content reference object in the content reference collection.

Parameters

None.

Returns

A content reference object.

Example

```
&MyCRef = &MyCollection.First();
```

InsertItem method: Content Reference collection

Syntax

InsertItem(*ContentReferenceName*, *ContentReferenceLabel*, *Node*, *URL*)

Description

The InsertItem method inserts the content reference object identified by *ContentReferenceName* into the content reference Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted into the database as soon as the method is executed.

Parameters

Parameter	Description
<i>ContentReferenceName</i>	Specify the name of a new content reference. This parameter takes a string value. If you specify a name that already exists in the collection, you get an error.
<i>ContentReferenceLabel</i>	Specify a description of the new content reference. This is the translated value. This parameter takes a string value.
<i>Node</i>	Specify a node. This parameter takes a string value. If you specify a fully qualified value for <i>URL</i> , you can specify a NULL (that is, two quotation marks with no space between them ("")).
<i>URL</i>	Specify a URL that contains the content. The format of this parameter depends on other properties, such as the type of content reference, where the data is stored, and so on.

Returns

A reference to the new content reference object if the method executed successfully, NULL otherwise.

Example

The following example inserts an external content reference that is a template:

```
&URL = "t/" | &ITEMNAME;  
&MyCRef = &CRefColl.InsertItem(&ITEMNAME, &ITEMLABEL, "", &URL);
```

The following example inserts a content reference where URLType is iScript (USCR):

```
&URL = "s/WEBLIB_PORTAL.FieldFormula.Portal_Trans_Dyn"  
  
&MyCRef = &CRefColl.InsertItem(&ITEMNAME, &ITEMLABEL, "HRMS", &URL);
```

Related Topics

- [Using Content References](#)

Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

ItemByName method: Content Reference collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the content reference object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing content reference within the content reference collection. If you specify an invalid name, the object is NULL.

Returns

A content reference object if successful, NULL otherwise.

Example

```
&MyCRef = &CRefColl.ItemByName("PORTAL_ADMIN);
```

Next method: Content Reference collection

Syntax

```
Next()
```

Description

The Next method returns the next content reference object in the content reference collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

content reference object.

Example

```
&MyCRef = &MyCollection.Next();
```

Content Reference Collection Property

In this section, we discuss the Count property.

Count property: Content Reference collection

Description

This property returns the number of content reference objects in the content reference Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

AttributeValue Class

The AttributeValue class provides access to attributes associated with either folders or content references.

AttributeValue objects are instantiated from an Attribute Collection Methods with the First, InsertItem, ItemByName, or Next methods.

See [Attribute Collection Methods](#).

See [Using Attributes](#).

AttributeValue Class Properties

In this section, we discuss the AttributeValue class properties. The properties are discussed in alphabetical order.

Label property: AttributeValue class

Description

This property returns the label of the AttributeValue as a string. This property works with the Translatable property. If Translatable is set to True, the value of Label can be translated.

The length of this property is 30 characters.

This property is read/write.

Related Topics

- [Translatable property: AttributeValue class](#)

Name property: AttributeValue class

Description

This property returns the name of the AttributeValue as a string.

The length of this property is 30 characters.

This property is read-only.

Example

```
&AttrColl = &Folder.Attributes;
&Attr = &AttrColl.First();
  &Scroll = GetLevel0().GetRow(1).GetRowset(Scroll.PORTAL_FLDR_ATR);
  &I = 1;
  While All(&Attr)
    &Record = &Scroll.GetRow(&I).GetRecord(Record.PORTAL_FLDR_ATR);
    &Record.PORTAL_ATTR_NAM.Value = &Attr.Name;
    &Record.PORTAL_ATTR_VAL.Value = &Attr.Value;
    &Attr = &AttrColl.Next();
    /* need this check so we don't insert extra blank row */
    If All(&Attr) Then
      &Scroll.InsertRow(&I);
      &I = &I + 1;
    End-If;
  End-While;
```

Translatable property: AttributeValue class

Description

This property specifies if the AttributeValue is translatable. This property takes a Boolean value: True if the AttributeValue can be translated, False otherwise.

If this property is set to True, the value of the Label property can be translated.

Note

Regardless of the order in which attributes were entered, they are ordered according to their translatable property, that is, attributes that have this property set as True come first, followed by attributes that have this property set as False.

This property is read/write.

Related Topics

- [Label property: AttributeValue class](#)

Value property: AttributeValue class

Description

This property returns the value of the AttributeValue as a string.

The length of this property depends on your system database limit for LONG fields.

This property is read/write.

Example

To specify more than a single value for an `AttributeValue`, you can specify several values separated by a semicolon. For example:

```
&MyAtt.value = "401k;benefits;dependants;HR";
```

Attribute Collection

The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

An Attribute Collection is instantiated from other classes as follows:

- From a content reference object with the Attributes property.
See [Attributes property: Content Reference class](#).
- From a Folder object with the Attributes property.
See [Attributes property: Folder class](#).
- From a PageletCategory object with the Attributes property.
See [Attributes property: PageletCategory class](#).
- From a Pagelet object with the Attributes property.
See [Attributes property: Pagelet class](#).

Attribute Collection Methods

In this section, we discuss the Attribute collection methods. The methods are discussed in alphabetical order.

DeleteItem method: Attribute collection

Syntax

```
DeleteItem(AttributeValueName)
```

Description

The DeleteItem method deletes the `AttributeValue` object identified by *AttributeValueName* from the Attribute Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>AttributeValueName</i>	Specify the name of an <code>AttributeValue</code> existing in the Attribute Collection.

Returns

A Boolean value: True if the `AttributeValue` was deleted, False otherwise.

First method: Attribute collection

Syntax

```
First()
```

Description

The First method returns the first `AttributeValue` object in the Attribute Collection.

Parameters

None.

Returns

An `AttributeValue` object.

Example

```
&MyAttributeValue = &MyCollection.First();
```

InsertItem method: Attribute collection

Syntax

```
InsertItem(AttributeValueName)
```

Description

The InsertItem method inserts the `AttributeValue` object identified by *AttributeValueName* from the Attribute Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>AttributeValueName</i>	Specify the name of an <code>AttributeValue</code> existing in the Attribute Collection.

Returns

A reference to the new `AttributeValue` object if the method executed successfully, NULL otherwise.

Example

```
For &I = 1 To &Rowset.ActiveRowCount
    If &CompName = "PORTAL_CREF_ADM" Then
        &Record = &Rowset.GetRow(&I).GetRecord(Record.PORTAL_CATR_DV);
    Else
        &Record = &Rowset.GetRow(&I).GetRecord(Record.PORTAL_FATR_DV);
    End-If;

    If &Record.PORTAL_ATTR_NAM.Value <> "" Then
        &Attr = &AttrColl.InsertItem(&Record.PORTAL_ATTR_NAM.Value);
        &Attr.Value = &Record.PORTAL_ATTR_VAL.Value;
    End-If;
End-For;
```

ItemByName method: Attribute collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the AttributeValue object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing AttributeValue within the Attribute Collection. If you specify an invalid name, the object is NULL.

Returns

An AttributeValue object if successful, NULL otherwise.

Example

```
&Attr = &AttrColl.ItembyName("RELLINK");
```

Next method: Attribute collection

Syntax

Next()

Description

The Next method returns the next AttributeValue object in the Attribute Collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

AttributeValue object.

Example

```
&MyAttributeValue = &MyCollection.Next();
```

Attribute Collection Property

In this section, we discuss the Count property.

Count property: Attribute collection

Description

This property returns the number of AttributeValue objects in the Attribute Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

PermissionValue Class

The PermissionValue provides access to permission lists associated with folders, content references, PageletCategory objects, or Pagelets.

Note

You *cannot* add any PermissionValue objects to a collection returned by the CascadedPermissions or CascadedRolePermissions property. You can add values only to the collection returned by the Permissions or RolePermissions property.

PermissionValue objects are instantiated from the following:

- A PermissionValue Collection with the First, InsertItem, ItemByName, or Next methods.
- A RolePermissionValue Collection with the First, InsertItem, ItemByName, or Next methods.

See [PermissionValue Collection](#).

See [Using Security](#).

See [Setting Permissions Using the PermissionValue Object](#).

PermissionValue Class Properties

In this section we discuss the Cascade and Name properties.

Cascade property: PermissionValue class

Description

This property indicates whether the current permission should be granted to all child folders.

This property is valid only with folders, not with content references.

This property takes a Boolean value. The default value for a new PermissionValue object is False.

This property is read/write.

Name property: PermissionValue class

Description

Specify the name of a permission list as the name of this object. You must specify a permission list that has already been created. This property takes a string value.

The length of this property is 30 characters.

This property is read/write.

PermType property: PermissionValue class

Description

Specify the type of the permission. Values are:

Value	Description
P	Specify a non role-based permission.
R	Specify a role-based permission.

This property is read/write.

Related Topics

- [RolePermissionValue Collection](#)
A RolePermissionValue collection is returned by the following:
- [PermissionValue Collection](#)
A PermissionValue collection is returned by the following:

PermissionValue Collection

A PermissionValue collection is returned by the following:

- CascadedPermissions and Permissions folder property
- CascadedPermissions and Permissions content reference property

- CascadedPermissions and Permissions PageletCategory object property
- CascadedPermissions and Permissions Pagelet property

What is contained in the PermissionValue collection depends on the property that created it.

See [CascadedPermissions property: Folder class](#), [Permissions property: Folder class](#).

See [CascadedPermissions property: Content Reference class](#), [Permissions property: Content Reference class](#).

See [CascadedPermissions property: PageletCategory class](#), [Permissions property: PageletCategory class](#).

See [CascadedPermissions property: Pagelet class](#), [Permissions property: Pagelet class](#).

See [Using Security](#).

PermissionValue Collection Methods

In this section, we discuss the PermissionValue collection methods. The methods are discussed in alphabetical order.

DeleteItem method: PermissionValue collection

Syntax

```
DeleteItem(PermissionValueName)
```

Description

The DeleteItem method deletes the PermissionValue object identified by *PermissionValueName* from the PermissionValue Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>PermissionValueName</i>	Specify the name of a PermissionValue existing in the PermissionValue collection.

Returns

A Boolean value: True if the PermissionValue was deleted, False otherwise.

Example

```
If Not &MyPValColl.DeleteItem("ALLPNLS") Then  
    /* do error processing */  
End-If;
```

First method: PermissionValue collection

Syntax

```
First()
```

Description

The First method returns the first PermissionValue object in the PermissionValue collection.

Parameters

None.

Returns

A PermissionValue object.

Example

```
&MyPermissionValue = &MyCollection.First();
```

InsertItem method: PermissionValue collection

Syntax

```
InsertItem(PermissionValueName)
```

Description

The InsertItem method inserts the PermissionValue object identified by *PermissionValueName* into the PermissionValue Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Note

You *cannot* add any PermissionValue objects to a collection returned by the CascadedPermissions property. You can only add values to the collection returned by the Permissions property.

Parameters

Parameter	Description
<i>PermissionValueName</i>	Specify the name of an existing permission list.

Returns

A reference to the new PermissionValue object if the method executed successfully, NULL otherwise.

Example

```
&MyPermV = &MyPermVColl.InsertItem("ALLPNLS");

If Not &MyPermV Then
    /* do error processing */
End-If;
```

ItemByName method: PermissionValue collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the PermissionValue object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing PermissionValue within the PermissionValue collection. If you specify an invalid name, the object is NULL.

Returns

A PermissionValue object if successful, NULL otherwise.

Example

```
&MyPVal = &MyPValColl.ItemByName("CUSTOMER");
```

Next method: PermissionValue collection

Syntax

Next()

Description

The Next method returns the next PermissionValue object in the PermissionValue collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

PermissionValue object.

Example

```
&MyPermissionValue = &MyCollection.Next();
```

PermissionValue Collection Property

In this section, we discuss the Count property.

Count property: PermissionValue collection

Description

This property returns the number of PermissionValue objects in the PermissionValue Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

RolePermissionValue Collection

A RolePermissionValue collection is returned by the following:

- CascadedRolePermissions and RolePermissions folder property
See [CascadedRolePermissions property: Folder class](#).
See [RolePermissions property: Folder class](#).
- CascadedRolePermissions and RolePermissions content reference property
See [CascadedRolePermissions property: Content Reference class](#).
See [RolePermissions property: Content Reference class](#).
- CascadedRolePermissions and RolePermissions content reference link property
See [CascadedRolePermissions property: Content Reference Link class](#).
See [RolePermissions property: Content Reference Link class](#).

What is contained in the RolePermissionValue collection depends on the property that created it.

RolePermissionValue Collection Methods

In this section, we discuss the RolePermissionValue collection methods. The methods are discussed in alphabetical order.

DeleteItem method: RolePermissionValue collection

Syntax

```
DeleteItem(RolePermissionValueName)
```

Description

The DeleteItem method deletes the RolePermissionValue object identified by *RolePermissionValueName* from the RolePermissionValue Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>RolePermissionValueName</i>	Specify the name of a RolePermissionValue existing in the RolePermissionValue collection.

Returns

A Boolean value: True if the RolePermissionValue was deleted, False otherwise.

Example

```
If Not &MyPValColl.DeleteItem("ALLPNLS") Then  
    /* do error processing */  
End-If;
```

First method: RolePermissionValue collection

Syntax

```
First()
```

Description

The First method returns the first RolePermissionValue object in the RolePermissionValue collection.

Parameters

None.

Returns

A RolePermissionValue object.

Example

```
&MyRolePermissionValue = &MyCollection.First();
```

InsertItem method: RolePermissionValue collection

Syntax

```
InsertItem(RolePermissionValueName)
```

Description

The InsertItem method inserts the RolePermissionValue object identified by *RolePermissionValueName* into the RolePermissionValue Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Note

You *cannot* add any RolePermissionValue objects to a collection returned by the CascadedRolePermissions property. You can only add values to the collection returned by the RolePermissions property.

Parameters

Parameter	Description
<i>RolePermissionValueName</i>	Specify the name of an existing role permission list.

Returns

A reference to the new RolePermissionValue object if the method executed successfully, NULL otherwise.

Example

```
&MyPermV = &MyPermVColl.InsertItem("ALLPNLS");  
  
If Not &MyPermV Then  
    /* do error processing */  
End-If;
```

ItemByName method: RolePermissionValue collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the RolePermissionValue object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing RolePermissionValue within the RolePermissionValue collection. If you specify an invalid name, the object is NULL.

Returns

A RolePermissionValue object if successful, NULL otherwise.

Example

```
&MyPVal = &MyPValColl.ItemByName("CUSTOMER");
```

Next method: RolePermissionValue collection

Syntax

```
Next()
```

Description

The Next method returns the next RolePermissionValue object in the RolePermissionValue collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

RolePermissionValue object.

Example

```
&MyRolePermissionValue = &MyCollection.Next();
```

RolePermissionValue Collection Property

In this section, we discuss the Count property.

Count property: PermissionValue collection

Description

This property returns the number of RolePermissionValue objects in the RolePermissionValue Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

ContentReference Links

A content reference link is a ContentReference object that delegates most of its properties to another content reference. It has its own separate properties, as well as a reference to the linked cref.

A content reference link is instantiated from the following:

- CreateLink content reference method
- CreateContentRefLink PortalRegistry method

Note

The CreateLink method creates a new link. To instantiate an existing link use the FindLinkByName method.

Related Topics

- [CreateContentRefLink method: PortalRegistry class](#)
- [FindCRefLinkByName method: PortalRegistry class](#)
- [CreateLink method: Content Reference class](#)

ContentReference Links Methods

In this section, we discuss the ContentReference link methods. The methods are discussed in alphabetical order.

Delete method: Content Reference Link class

Syntax

```
Delete()
```

Description

Use the delete method to delete the link from the database.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The link is not marked for deletion, then actually deleted later. The link is deleted from the database as soon as the method is executed.

Parameters

None.

Returns

A Boolean value: True if the content reference link and its associated objects are deleted successfully, False otherwise.

Save method: Content Reference Link class

Syntax

Save()

Description

The Save method saves any changes you made to the content reference link, for example, a changed description or ValidFrom date.

After you create a link using either the CreateLink or CreateContentRefLink methods you must use the Save method to save the link to the database.

Using this method also saves any changes you made to PermissionValue or AttributeValue objects associated with this content reference link.

Parameters

None.

Returns

A Boolean value: True if the content reference link and its associated objects saved successfully, False otherwise. If False is returned, a message is also written to the PSMessage collection.

Example

```
If NOT(&MyCRefLink.Save()) Then
    /* save failed, do error processing */
End-If;
```

ContentReference Links Properties

In this section, we discuss the ContentReference link properties. The properties are discussed in alphabetical order.

AbsoluteContentURL property: Content Reference Link class

Description

This property returns the absolute content URL, that is, the content from the content servlet (psc). The content is displayed without any portal template.

This property is read-only.

Example

The following is an example absolute content URL:

```
http://serverx/psc/PS84/EMPLOYEEPORTAL/CRM/c/SFA.CUSTOMERINFO.GBL?page=CUST_⇒  
DATA1&&Action=U&emplid=00001
```

AbsolutePortalURL property: Content Reference Link class

Description

This property returns the absolute content reference link portal URL. This URL also contains the content in the portal template.

This property is read-only.

Example

```
http://serverx/psc/PS84/EMPLOYEEPORTAL/CRM/c/SFA.CUSTOMERINFO.GBL?page=CUST_⇒  
DATA1&&Action=U&emplid=00001
```

Attributes property: Content Reference Link class

Description

This property returns an Attribute Collection containing the AttributeValues for this content reference link object.

This property is read/write.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: Content Reference Link class

Description

This property returns the author (PeopleSoft user ID) for this content reference link as a string.

This property is read-only.

AuthorAccess property: Content Reference Link class

Description

This property specifies whether the author of the content reference link has access to the content reference link. This property takes a Boolean value. The default value for this property is true.

This property is read/write.

Authorized property: Content Reference Link class

Description

This property specifies whether the user is authorized to view this content reference link.

This property is used when you access a particular content reference link using `FindCRefLinkByURL`. If you specified a valid content reference link, a content reference link is always returned, whether you are authorized to view it or not. This is the only property you can view from an object that you are not authorized to and the content reference is empty.

The initial value of this property depends on the other permission properties (`PublicAccess` and `AuthorAccess`) and the permission list values in the `PermissionValue` object associated with this content reference link.

This property is read-only.

Related Topics

- [FindCRefLinkByName method: PortalRegistry class](#)

CascadedPermissions property: Content Reference Link class

Description

This property returns a `PermissionValue` Collection. This collection contains the value of the permissions for all the parent objects (up to the root folder). To determine only the permissions of the object use the `Permissions` property instead.

Note

You cannot add any `PermissionValue` objects to a collection returned by the `CascadedPermissions` property. You can add values only to the collection returned by the `Permissions` property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [Permissions property: Content Reference class](#)

CascadedRolePermissions property: Content Reference Link class

Description

This property returns a `RolePermissionValue` Collection. This collection contains the value of the role-based permissions for all the parent objects (up to the root folder). To determine only the permissions of the object use the `RolePermissions` property instead. To determine the non role-based permissions of the object use the `Permissions` property instead.

Note

You cannot add any PermissionValue objects to a collection returned by the CascadedRolePermissions property. You can add values only to the collection returned by the RolePermissions property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Content Reference Link class](#)
- [RolePermissions property: Content Reference Link class](#)
- [RolePermissionValue Collection](#)

A RolePermissionValue collection is returned by the following:

ContentProvider property: Content Reference Link class

Description

This property returns the name of the node for the content reference link as a string.

This property is read-only.

CreationDate property: Content Reference Link class

Description

This property returns the creation date for this content reference link object as a string.

This property is read-only.

Data property: Content Reference Link class

Description

This property returns the data for this content reference link. This property is valid only when the StorageType property is LOCL.

The length of this property depends on your system database limit for LONG fields.

This property is read/write.

Example

```
&MyData = &MyCRefLink.Data;
```

Related Topics

- [StorageType property: Content Reference class](#)

Description property: Content Reference Link class

Description

This property returns or sets the description for this content reference link object as a string.

The length of this property is 256 characters.

This property is translatable.

This property is read/write.

IsMobile property: Content Reference Link class

Description

Note

PeopleSoft Mobile Agent is a desupported product. This mobile property currently exists for backward compatibility only.

This property returns True if this content reference link is used with mobile applications, False otherwise.

This property is read/write.

IsVisible property: Content Reference Link class

Description

This property returns True if the Hide from Portal Navigation check box is not selected when the content reference link is created. If the content reference link is hidden from portal navigation, this property returns False. Also, if the date associated with the link is not valid (is not within the valid to and valid from dates,) this property returns False.

Considerations Using IsVisible

If you do not specifically set this property on a new or copied content reference link, the IsVisible property is set as follows:

- If the ValidFrom date is less then or equal to that day's date, the IsVisible property is set to True.
- If there is no ValidTo date the IsVisible property is set to True.
- If the ValidTo date is greater then or equal to that day's date, the IsVisible property is set to True.

This property is read-only.

Related Topics

- [ValidFrom property: Content Reference class](#)
- [ValidTo property: Content Reference class](#)

Label property: Content Reference Link class

Description

This property returns or sets the label for this content reference link object as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

Name property: Content Reference Link class

Description

This property returns the name for this content reference link object as a string. The name is a unique identifier for each content reference link object. The name cannot start with a number, and it cannot have spaces and special characters.

Every content reference link name must be unique in the portal, not just in the parent folder.

This property is read/write.

OwnerId property: Content Reference Link class

Description

This property returns or sets the owner ID of the content reference link object as a string.

This property is read/write.

ParentName property: Content Reference Link class

Description

This property returns the parent folder name for this content reference link object as a string.

You can use this property to move the content reference link to another folder.

This property is read/write.

Example

The following example uses the ParentName to return a folder object for the content reference link.

```
&Folder = &Portal.FindFolderByName(&CRefLink.ParentName);
```

Path property: Content Reference Link class

Description

The Path property returns a path to this content reference link, with each element of the path separated by a period. The path has the following syntax:

```
Root{PORTAL_ROOT_OBJECT}.LinkFolder {<Id of links folder>}.CrefLink {<Id of  
the⇒  
  cref link> }
```

This property is read-only.

Permissions property: Content Reference Link class

Description

This property returns a `PermissionValue` Collection. This collection contains the value of the non role-based permissions for this content reference link. To access the role-based permissions, use the `RolePermissions` property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [CascadedPermissions property: Content Reference class](#)
- [RolePermissions property: Content Reference Link class](#)

Product property: Content Reference Link class

Description

This property returns or sets the PeopleSoft product for this content reference link object as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: Content Reference Link class

Description

This property specifies whether the link is public or private. This property takes a Boolean value: true if the content reference link is public and there are no permission lists associated with it. If it is false, the link uses permission list control.

For links, this values is same as that of the linked content reference. If the content reference is public, the link is public and can be viewed by anyone logged on to the system.

This property is read-only.

RelativeURL property: Content Reference Link class

Description

This property returns the relative URL in the following format:

```
../../../../Portal/Node/Content_Type/ContentID
```

For example, from the following URL:

```
http://mlee2038/servlets/psp/PS84/e_procurement/fdm/c/E_PRO.CheckOut.GBL?
page=>
view&Setid=110&Custid=99
```

The RelativeURL returns the following:

```
e_procurement/fdm/c/E_PRO.CheckOut.GBL?page=view&Setid=110&Custid=99
```

This property is read-only.

RolePermissions property: Content Reference Link class

Description

This property returns a RolePermissionValue Collection. This collection contains the value of the role-based permissions for this content reference link. To access the non role-based permissions, use the Permissions property.

This property is read-only.

Related Topics

- [CascadedRolePermissions property: Content Reference Link class](#)
- [Permissions property: Content Reference Link class](#)
- [RolePermissionValue Collection](#)

A RolePermissionValue collection is returned by the following:

SequenceNumber property: Content Reference Link class

Description

The sequence number is used when returning a collection. The default order of the returned content reference links is based on the sequence number. Use this property to reorder content reference links. This property takes a number value.

If there are duplicates in the sequence number, the content reference links are returned alphabetically.

The length of this property is 4 characters.

This property is read/write.

Template property: Content Reference Link class

Description

This property returns or sets the name of the template used with this content reference link as a string. You must specify the name of an existing template.

This property uses the name, not the label, of a content reference link.

This property is used only when the UsageType property is specified as Target (TARG) and the TemplateType property is specified as HTML.

To return a reference to the content reference link that contains the template specified by this property, use the TemplateObject property.

The length of this property is 30 characters.

This property is read/write.

Related Topics

- [UsageType property: Content Reference class](#)
- [TemplateType property: Content Reference class](#)
- [TemplateObject property: Content Reference class](#)

TemplateObject property: Content Reference Link class

Description

This property returns a reference to a content reference link object that contains the template specified by the Template property as a content reference link. If no template is specified with Template, this property returns a null value.

This property is read-only.

Related Topics

- [Template property: Content Reference class](#)

TemplateType property: Content Reference Link class

Description

This property indicates whether a template should be used to wrap the content. This property takes a string value.

Values are:

Value	Description
HTML	An HTML template should wrap the data (URL) in the content reference.
NONE	No template should be used. The text should not be wrapped.

HTML is the default value on a new content reference.

Use the NONE value if the URL should not appear in the portal. An example is when the content reference link is a template itself.

If the homepage template for the user is un-retrievable, the system tries to use the default user's template first, before resorting to the portal default template.

When the content reference link describes content, this property should be set to HTML.

This property is read/write.

Related Topics

- [Using Content References](#)
Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

URL property: Content Reference Link class

Description

This property returns the URL for this content reference link object as a string. The content reference link derives the URL from the content reference it is linked to. The URL of the link is same as that of the linked content reference.

A query string value is added on the content reference URL to make the link unique. If the URL of the linked content reference changes, this URL is changed.

This property is read-only.

Related Topics

- [AbsoluteContentURL property: Content Reference class](#)
- [Using Content References](#)
Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

URLType property: Content Reference Link class

Description

This property returns what kind of URL is used to retrieve the content.

This property is read-only.

Related Topics

- [StorageType property: Content Reference class](#)

UsageType property: Content Reference Link class

Description

This property returns what the content reference link is used for.

The value for this property is same as that of the content reference when the link is viewed as a content reference.

The usage type of the link is LINK in the database.

A content reference link can be created only for content references that have a type of TARG.

This property is read-only.

Related Topics

- [Using Content References](#)
Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

ValidFrom property: Content Reference Link class

Description

This property returns or sets the date this content reference link is valid from as a string.

This property is read/write.

ValidTo property: Content Reference Link class

Description

This property returns or sets the date this content reference link is valid until as a string.

This property is read/write.

Note

The portal registry API never uses the ValidTo and ValidFrom fields to determine what to return in a collection. You must check for these values in your application.

Link Collection

A Links collection is returned by the Links content reference property.

Related Topics

- [Links property: Content Reference class](#)

Link Collection Methods

In this section, we discuss the link collection methods. The methods are discussed in alphabetical order.

First method: Links collection

Syntax

First()

Description

The First method returns the first link object in the link collection.

Parameters

None.

Returns

A link object.

Next method: Links collection

Syntax

```
Next()
```

Description

The Next method returns the next link object in the collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A link object.

Link Collection Property

In this section, we discuss the link collection property Count.

Count property: Links collection

Description

This property returns the number of link objects in the link collection, as a number.

This property is read-only.

Link Class

A Link object is returned by the First and Next Link collection methods.

Related Topics

- [Link Collection Methods](#)
In this section, we discuss the link collection methods. The methods are discussed in alphabetical order.

Link Properties

In this section, we discuss the link properties. The properties are discussed in alphabetical order.

LinksObjectName property: Link class

Description

This property returns the object name of the link as a string.

This property is read-only.

LinksObjectType property: Link class

Description

This property returns the object type as a string. Valid value is CONTENTREF.

This property is read-only.

LinksPortalName property: Link class

Description

This property returns the name of the portal from which the link originated.

This property is read-only.

TabDefinition Class

The TabDefinition class provides access to the homepage tab defined for the portal.

TabDefinition objects are instantiated from a TabDefinition Collection with the First, InsertItem, ItemByName, or Next methods.

See [TabDefinition Collection](#).

TabDefinition Class Methods

In this section, we discuss the Save method.

Save method: TabDefinition class

Syntax

Save()

Description

The Save method saves any changes you made to the TabDefinition, for example, a changed description. It also performs some validation.

Using this method also saves any changes you made to DynamicCategories and AssignedPagelets objects associated with this TabDefinition.

Parameters

None.

Returns

A Boolean value: True if the TabDefinition and its associated object saved successfully, False otherwise.

Example

```
If NOT(&MyTabDefn.Save()) Then  
    /* save failed, do error processing */  
End-If;
```

TabDefinition Class Properties

In this section, we discuss the TabDefinition class properties. The properties are discussed in alphabetical order.

AssignedPagelets property: TabDefinition class

Description

This property returns a reference to an AssignedPagelet Collection for this TabDefinition object.

This property is read-only.

Related Topics

- [AssignedPagelet Collection](#)
An AssignedPagelet collection is returned by the AssignedPagelet TabDefinition method.

AssignedSections property: TabDefinition class

Description

This property returns an AssignedSection Collection for this TabDefinition object.

This property is read-only.

AvailableCategories property: TabDefinition class

Description

This property returns a reference to an AvailableCategory Collection for this TabDefinition object.

This property is read-only.

Related Topics

- [AvailableCategory Collection](#)
An AvailableCategory is composed of a category name and an AvailablePagelet Collection, that is, a collection of all the available pagelets associated with that category.

AvailablePagelets property: TabDefinition class

Description

This property returns a reference to an AvailablePagelet Collection for this TabDefinition object.

This property is read-only.

Related Topics

- [AvailablePagelet Collection](#)
An AvailablePagelet collection is returned by the AvailablePagelet TabDefinition method.

Attributes property: TabDefinition class

Description

This property returns an Attribute Collection containing the AttributeValues for this TabDefinition object.

This property is read-only.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: TabDefinition class

Description

This property returns the author (PeopleSoft user ID) for this TabDefinition object as a string.

This property is read-only.

AuthorAccess property: TabDefinition class

Description

This property specifies whether the author of the TabDefinition has access to the TabDefinition. This property takes a Boolean value. The default value for this property is True.

This property is read/write.

ColumnLayout property: TabDefinition class

Description

This property indicates whether the tab layout is for two or three columns. This property takes a string value.

The values for this property are:

Value	Description
2	Two-column table
3	Three-column table

This property is read/write.

CreationDate property: TabDefinition class

Description

This property returns the creation date for this TabDefinition object as a string.

This property is read-only.

Description property: TabDefinition class

Description

This property returns or sets the description for this TabDefinition object as a string.

The length of this property is 256 characters.

This property is translatable.

This property is read/write.

DynamicCategories property: TabDefinition class

Description

This property returns a reference to a DynamicCategory Collection for this TabDefinition object.

This property is read-only.

Related Topics

- [DynamicCategory Collection](#)
A DynamicCategory collection contains a collection of PageletCategory names associated with a TabDefinition. The collection is initially ordered by category name.

HelpID property: TabDefinition class

Description

This property returns the help system identifier for this tab. It enables the help system to provide tab-specific help. This property takes a string value.

This property is read/write.

HideInPersonalize property: TabDefinition class

Description

This property indicates whether the fluid homepage or dashboard is visible in personalization mode. This property takes a Boolean value: True, the fluid homepage or dashboard is hidden in personalization mode; False, the fluid homepage or dashboard is visible in personalization mode. The default value is False.

This property is read/write.

HtmlText property: TabDefinition class

Description

This property returns the HTML text associated with this tab definition as a string.

This property is read-only.

IsHideActionBar property: TabDefinition class

Description

This property hides all pagelet action bar images for all pagelets used on this tab. This property overrides any properties for the pagelets used on this tab. This property takes a Boolean value: True, hide images, False, display images

This property is read/write.

IsLayoutLocked property: TabDefinition class

Description

This property indicates whether the user can change the tab's default number of columns. This property takes a Boolean value: True, the user can change the tab columns, False, the columns can't be changed by the user.

This property is read/write.

IsPersonalizable property: TabDefinition class

Description

This property indicates whether the fluid homepage or dashboard can be personalized by the user. This property takes a Boolean value: True, the user can personalize the homepage or dashboard; False, the user can't. The default value is True unless the TabDefinition has a section.

This property is read/write.

IsRenameable property: TabDefinition class

Description

This property indicates whether the tab's label can be changed by the user. This property takes a Boolean value: True, the user can change the label, False, the user can't.

This property is read/write.

Label property: TabDefinition class

Description

This property returns or sets the label for this TabDefinition object as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

LayoutBehavior property: TabDefinition class

Description

This property indicates whether the user can change when and how the tab displays. This property takes a string value.

The values are:

Value	Description
4OPT	The user can choose to add this tab to their homepage. It doesn't show up by default.
3DEF	The user sees this tab the first time they log in, however, they can remove this tab if they'd like.
2REQ	The user can't remove this tab from their homepage. However, they are allowed to change its sequence or order on the page.
1FIX	The user can't remove this tab or change its position on the page.

This property is read/write.

Name property: TabDefinition class

Description

This property returns the name for this TabDefinition object as a string. The name is a unique identifier for each TabDefinition object.

Every TabDefinition name must be unique in the portal, not just in the parent folder.

This property is read-only.

OwnerId property: TabDefinition class

Description

This property returns or sets the owner ID of the TabDefinition object as a string.

This property is read/write.

Product property: TabDefinition class

Description

This property returns or sets the PeopleSoft product for this TabDefinition object as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: TabDefinition class

Description

This property indicates whether a TabDefinition is generally accessible, that is, if it is always included in the general TabDefinition collection. This property takes a Boolean value.

The default value for this property is False.

This property is read/write.

QualifiedURL property: TabDefinition class

Description

This property returns an absolute URL. If the TabDefinition has a ContentProvider associated with it, the URI from the ContentProvider is concatenated with the URL from the TabDefinition. If there is no ContentProvider, this property returns the text in the URL property.

This property is read-only.

Related Topics

- [URL property: Content Reference class](#)

SectAuthorAccess property: TabDefinition class

Description

Specifies whether the author of the homepage, or dashboard, has access to this section. This property takes a boolean value, with the default value being False. This is read/write and will return False if Cref Usage is not "Section Template".

Note

This property applies only to Section Templates, as in when Cref Usage is "Section Template".

SectPermissions property: TabDefinition class

Description

The list of permissions assigned to a section template. Returns a PermissionValue Collection. This property is read-only and will return Null if Cref Usage is not "Section Template".

Note

This property applies only to Section Templates, as in when Cref Usage is "Section Template".

SectPublicAccess property: TabDefinition class

Description

This property specifies whether the section inherits the same homepage/dashboard security. This property takes a boolean value, with the default value being True. This is read/write property.

If SectAuthorAccess is set to True or SectRoles or SectPermission Lists are assigned, the property SectPublicAccess must explicitly be set to False.

This property will return False if Cref Usage is not "Section Template".

Note

This property applies only to Section Templates, as in when Cref Usage is "Section Template".

SectRoles property: TabDefinition class

Description

This property returns the list of roles assigned to the section template. It returns a PermissionValue Collection. This property is read-only and will return Null if Cref Usage is not "Section Template".

Note

This property applies only to Section Templates, as in when Cref Usage is "Section Template".

SequenceNumber property: TabDefinition class

Description

The sequence number is used when returning a collection. The default order of the returned TabDefinitions is based on the sequence number. Use this property to reorder TabDefinitions. This property takes a number value.

If there are duplicates in the sequence number, the TabDefinitions are returned alphabetically.

The length of this property is 4 characters.

This property is read/write.

StyleSheet property: TabDefinition class

Description

This property defines the style sheet to use for this tab. This property takes a string value. This property is 30 characters long.

If no style sheet is specified, the default style sheet PSSTYLEDEF is used.

This property is read/write.

ValidFrom property: TabDefinition class

Description

This property returns or sets the date this TabDefinition is valid from as a string.

This property is read/write.

ValidTo property: TabDefinition class

Description

This property returns or sets the date this TabDefinition is valid until as a string.

This property is read/write.

Note

The portal registry API never uses the ValidTo and ValidFrom fields to determine what to return in a collection. You must check for these values in your application.

TabDefinition Collection

A TabDefinition collection is the collection of all TabDefinitions for a portal.

A TabDefinition collection is returned by the TabDefinitions PortalRegistry property.

See [TabDefinitions property: PortalRegistry class](#).

TabDefinition Collection Methods

This section describes the TabDefinition collection methods in alphabetical order.

DeleteItem method: TabDefinition collection

Syntax

```
DeleteItem(TabDefinitionName)
```

Description

The DeleteItem method deletes the TabDefinition object identified by *TabDefinitionName* from the TabDefinition Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database *as soon* as the method is executed.

Parameters

Parameter	Description
<i>TabDefinitionName</i>	Specify the name of a TabDefinition existing in the TabDefinition collection.

Returns

A Boolean value: True if the TabDefinition was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("TabDefnTest") Then  
    /* do error processing */  
End-If;
```

First method: TabDefinition collection

Syntax

```
First()
```

Description

The First method returns the first TabDefinition object in the TabDefinition collection.

Parameters

None.

Returns

A TabDefinition object.

Example

```
&MyTabDefinition = &MyCollection.First();
```

InsertItem method: TabDefinition collection

Syntax

```
InsertItem(TabDefinitionName)
```

Description

The InsertItem method inserts the TabDefinition object identified by *TabDefinitionName* into the TabDefinition Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted into the database *as soon* as the method is executed.

Parameters

Parameter	Description
<i>TabDefinitionName</i>	Specify the name of an existing permission list.

Returns

A reference to the new TabDefinition object if the method executed successfully, NULL otherwise.

Example

```
&MyTabDef = &MyColl.InsertItem("Empl_Homepage");

If Not &MyTabDef Then
    /* do error processing */
End-If;
```

ItemByName method: TabDefinition collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the TabDefinition object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing TabDefinition within the TabDefinition collection. If you specify an invalid name, the object is NULL.

Returns

A TabDefinition object if successful, NULL otherwise.

Example

```
&MyTabDefn = &MyColl.ItemByName("Empl_Homepage");
```

Next method: TabDefinition collection

Syntax

Next()

Description

The Next method returns the next TabDefinition object in the TabDefinition collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

TabDefinition object.

Example

```
&MyTabDefinition = &MyCollection.Next();
```

TabDefinition Collection Property

In this section, we discuss the Count property.

Count property: TabDefinition collection

Description

This property returns the number of TabDefinition objects in the TabDefinition Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

AssignedPagelet Class

An AssignedPagelet is a pagelet object that has been assigned to a particular tab. This pagelet also contains the layout data that is specific to the pagelet and tab.

The AssignedPagelet class represents pagelet objects in classic homepage or tile objects in fluid homepages and dashboards.

AssignedPagelet objects are instantiated from an AssignedPagelet Collection with the First, InsertItem, ItemByName, or Next methods.

See [AssignedPagelet Collection](#).

AssignedPagelet Class Properties

In this section, we discuss the AssignedPagelet class properties. The properties are discussed in alphabetical order.

Column property: AssignedPagelet class

Description

This property returns the column in which this pagelet is displayed, as a number.

This property is read/write.

LayoutBehavior property: AssignedPagelet class

Description

This property indicates whether the user can change when and how the pagelet displays. This property takes a string value.

The values are:

Value	Description
4OPT	The user can choose to add this pagelet to their tab. It doesn't show up by default. The user can remove and reposition this pagelet on the tab.
3DEF	The user sees this pagelet the first time they log in, however, they can remove or reposition this pagelet if they'd like.
2REQ	The user can't remove this pagelet from the tab. However, they are allowed to reposition the pagelet on the tab.
1FIX	The user can't remove this pagelet or change its position on the tab.

This property is read/write.

PageletName property: AssignedPagelet class

Description

This property returns name for Pagelet objects in classic homepage/dashboard or tile objects in fluid homepage/dashboard as a string. The name is a unique identifier for each Pagelet object.

This property is read-only.

Row property: AssignedPagelet class

Description

This property returns the row in which this pagelet is displayed, as a number.

This property is read/write.

SectionName property: AssignedPagelet class

Description

This property is only applicable to tiles on fluid homepages or dashboards. This property returns the section name where the tile is located on a fluid homepage or dashboard, as a String. The section name must be 30 characters or less.

This property is read/write.

AssignedPagelet Collection

An AssignedPagelet collection is returned by the AssignedPagelet TabDefinition method.

It contains a collection of all the pagelets explicitly assigned to the tab.

See [AssignedPagelets property: TabDefinition class](#).

See [AssignedPagelet Class](#).

AssignedPagelet Collection Methods

In this section, we discuss the AssignedPagelet collection methods. The methods are discussed in alphabetical order.

DeleteItem method: AssignedPagelet collection

Syntax

```
DeleteItem(PageletName)
```

Description

The DeleteItem method deletes the AssignedPagelet object identified by *PageletName* from the AssignedPagelet Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>PageletName</i>	Specify the name of an AssignedPagelet existing in the AssignedPagelet collection.

Returns

A Boolean value: True if the AssignedPagelet was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("Weather_411") Then  
    /* do error processing */  
End-If;
```

First method: AssignedPagelet collection

Syntax

```
First()
```

Description

The First method returns the first AssignedPagelet object in the AssignedPagelet collection.

Parameters

None.

Returns

An AssignedPagelet object.

Example

```
&MyAssignedPagelet = &MyCollection.First();
```

InsertItem method: AssignedPagelet collection

Syntax

```
InsertItem(PageletName, Column, Row, LayoutBehavior)
```

Description

The InsertItem method inserts the AssignedPagelet object identified by the parameters into the AssignedPagelet Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>PageletName</i>	Specify the name of the pagelet that you want to insert.
<i>Column</i>	Specify the column that you want this pagelet to display in, as a number.
<i>Row</i>	Specify the row that you want this pagelet to display in, as a number. You can specify a zero if you don't know which row.
<i>LayoutBehavior</i>	Specify whether the user can change when and how the pagelet displays. This property takes a string value. The values are:

Value	Description
4OPT	The user can choose to add this pagelet to their tab. It doesn't show up by default. The user can remove and reposition this pagelet on the tab.
3DEF	The user sees this pagelet the first time they log in, however, they can remove or reposition this pagelet if they'd like.

Value	Description
2REQ	The user can't remove this pagelet from the tab. However, they are allowed to reposition the pagelet on the tab.
1FIX	The user can't remove this pagelet or change its position on the tab.

Returns

A reference to the new AssignedPagelet object if the method executed successfully, NULL otherwise.

Example

```
&MyPagelet = &MyColl.InsertItem("Weather_411");

If Not &MyPagelet Then
    /* do error processing */
End-If;
```

ItemByName method: AssignedPagelet collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the AssignedPagelet object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing AssignedPagelet within the AssignedPagelet collection. If you specify an invalid name, the object is NULL.

Returns

An AssignedPagelet object if successful, NULL otherwise.

Example

```
&MyPagelet = &MyColl.ItemByName("Dictionary");
```

Next method: AssignedPagelet collection

Syntax

Next()

Description

The Next method returns the next AssignedPagelet object in the AssignedPagelet collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

An AssignedPagelet object.

Example

```
&MyAssignedPagelet = &MyCollection.Next();
```

AssignedPagelet Collection Property

In this section, we discuss the Count property.

Count property: AssignedPagelet collection

Description

This property returns the number of AssignedPagelet objects in the AssignedPagelet Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

AssignedSection Class

An assigned section is a section object that has been assigned to a particular fluid homepage or dashboard. It contains a collection of tiles assigned to this section.

AssignedSection objects are instantiated from an AssignedSection Collection with the InsertItem method.

Note

The AssignedSection class is applicable only to fluid homepages and dashboards.

See [AssignedSections Collection](#).

AssignedSection Class Properties

In this section, we discuss the AssignedSection class properties. The properties are discussed in alphabetical order.

AssignedPagelets property: AssignedSection class

Description

This property returns an AssignedPageletCollection object that contains a collection of tiles found in this section.

This property is read-only.

AuthorAccess property: AssignedSection class

Description

This property specifies whether the author of the homepage/dashboard has access to the current section. This property takes a boolean value, with the default value being False. This property is read/write.

Authorized property: AssignedSection class

Description

This property specifies whether the current user has access to the section. It reflects the security settings assigned to the section or the lack of security settings set. This property is read-only.

Permissions property: AssignedSection class

Description

This property returns the list of permissions assigned to a section. It returns a PermissionValueCollection. This property is read-only.

Column property: AssignedSection class

Description

This property returns the column in which this section is displayed, as a number. This property always returns zero.

This property is read-only.

HideInPersonalize property: AssignedSection class

Description

This property indicates whether this section is hidden from personalization mode. It takes a Boolean value.

This property is read/write.

IsPersonalizable property: AssignedSection class

Description

This property indicates whether this section can be personalized. It takes a Boolean value.

This property is read/write.

IsRenameable property: AssignedSection class

Description

This property indicates whether the user can change the label of the section. It takes a Boolean value.

This property is read/write.

Label property: AssignedSection class

Description

This property returns the section label that is displayed to the user on the fluid homepage or dashboard, as a string.

This property is read/write.

LayoutBehavior property: AssignedSection class

Description

This property indicates whether the user can change when and how the section displays. This property takes a string value.

Valid values are:

Value	Description
4OPT	Similar behavior as 3DEF.
3DEF	This section displays to the user by default. If personalization is enabled, the user can remove or reposition this section.
2REQ	This section is required. The user cannot remove this section. However, they are allowed to reposition the section if personalization is enabled.
1FIX	The user cannot remove this section or change its position on the homepage or dashboard.

This property is read/write.

Name property: AssignedSection class

Description

This property returns the name for this section object assigned to a fluid homepage or dashboard, as a string. The name is a unique identifier for each section object.

This property is read-only.

Order property: AssignedSection class

Description

This property returns the order number of this section on the fluid homepage or dashboard, as a Number value.

This property is read/write.

PublicAccess property: AssignedSection class

Description

This property specifies whether a section inherits the same homepage/dashboard security. This property takes a boolean value, with the default value being True. This property is read/write.

If AuthorAccess is set to True, or Roles or Permission Lists are assigned to a section, the property PublicAccess must be set explicitly to False.

RolePermissions property: AssignedSection class

Description

This property returns the list of roles assigned to this section. It returns a RolePermissionValue Collection. This property is read-only.

AssignedSections Collection

An AssignedSections collection is returned by the AssignedSections TabDefinition property.

It contains a collection of all the sections assigned to a fluid homepage or dashboard. The AssignedSections collection is applicable only to fluid homepages and dashboards.

See [AssignedSection Class](#).

AssignedSections Collection Methods

In this section, we discuss the AssignedSections collection methods. The methods are discussed in alphabetical order.

DeleteItem method: AssignedSection collection

Syntax

```
DeleteItem(SectionName)
```

Description

The DeleteItem method deletes the AssignedSection object identified by *SectionName* from the AssignedSections Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>SectionName</i>	Specify the name of an AssignedSection existing in the AssignedSections collection.

Returns

A Boolean value: True if the AssignedSection was deleted, False otherwise.

Example

```
Local boolean &ret = &sectionCollection.DeleteItem("SECTIONA");
```

First method: AssignedSection collection

Syntax

```
First()
```

Description

The First method returns the first AssignedSection object in the AssignedSections collection.

Parameters

None.

Returns

An AssignedSection object.

Example

```
&thisSection = &sectionCollection.First();
```

InsertItem method: AssignedSection collection

Syntax

```
InsertItem(SectionName,Column,Order,LayoutBehavior)
```

Description

The InsertItem method creates and inserts an AssignedSection object identified by the given parameters into the AssignedSections Collection.

Parameters

Parameter	Description
<i>SectionName</i>	Specify a unique name of the section that you want to insert.
<i>Column</i>	Always pass zero as the value. The system automatically saves this section to have a column number set to zero.
<i>Order</i>	The order number of the AssignedSection on a fluid homepage or dashboard.
<i>LayoutBehavior</i>	Specify whether the user can change when and how the section displays. This property takes a string value. The values are:
Value	Description
4OPT	Similar behavior as 3DEF.
3DEF	This section displays to the user by default. If personalization is enabled, the user can remove or reposition this section.
2REQ	This section is required. The user cannot remove this section. However, they are allowed to reposition the section if personalization is enabled.
1FIX	The user cannot remove this section or change its position on the homepage or dashboard.

Returns

A reference to the new AssignedSection object if the method executed successfully, NULL otherwise.

Example

The following code inserts a new section (SECTIONA) as the first section on the homepage with the layout settings as 3DEF.

```
&thisSection = &sectionCollection.InsertItem("SECTIONA", 0, 1, "3DEF");
```

ItemByName method: AssignedSection collection

Syntax

`ItemByName(Name)`

Description

The `ItemByName` method returns the `AssignedSection` object identified as `Name` from the `AssignedSections` collection.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing <code>AssignedSection</code> within the <code>AssignedSections</code> collection.

Returns

An `AssignedSection` object if successful, `NULL` otherwise.

Example

```
&thisSection = &sectionCollection.ItemByName("SECTIONA");
```

Next method: AssignedSection collection

Syntax

`Next()`

Description

The `Next` method returns the next `AssignedSection` object in the `AssignedSections` collection. You can use this method only after you have used the `First` method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

An `AssignedSection` object.

Example

```
&thisSection = &sectionCollection.Next();
```

AssignedSections Collection Property

In this section, we discuss the Count property.

Count property: AssignedSection collection

Description

This property returns the number of AssignedSection objects in the AssignedSections Collection, as a Number.

This property is read-only.

AvailableCategory Class

An AvailableCategory class is composed of a category name and an AvailablePagelet Collection, that is, a collection of all the available pagelets associated with that category.

AvailableCategory objects are instantiated from an AvailableCategory Collection with the First, ItemByName, or Next methods.

See [AvailableCategory Collection](#).

AvailableCategory Class Properties

In this section, we discuss the AvailableCategory class properties. The properties are discussed in alphabetical order.

AvailablePagelets property: AvailableCategory class

Description

This property returns a reference to an AvailablePagelet Collection associated with the specified CategoryName.

This property is read-only.

Related Topics

- [AvailablePagelet Collection](#)
An AvailablePagelet collection is returned by the AvailablePagelet TabDefinition method.

CategoryName property: AvailableCategory class

Description

Use this property to return the name of a category to be associated with the TabDefinition, as a string.

This property is read-only.

AvailableCategory Collection

An AvailableCategory is composed of a category name and an AvailablePagelet Collection, that is, a collection of all the available pagelets associated with that category.

An AvailableCategory collection is returned by the AvailableCategories TabDefinition property.

See [AvailableCategory Collection](#).

AvailableCategory Collection Methods

In this section, we discuss the AvailableCategory collection methods. The methods are discussed in alphabetical order.

First method: AvailableCategory collection

Syntax

```
First()
```

Description

The First method returns the first AvailableCategory object in the AvailableCategory collection.

Parameters

None.

Returns

An AvailableCategory object.

Example

```
&MyAvailableCategory = &MyCollection.First();
```

ItemByName method: AvailableCategory collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the AvailableCategory object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing AvailableCategory within the AvailableCategory collection. If you specify an invalid name, the object is NULL.

Returns

An AvailableCategory object if successful, NULL otherwise.

Example

```
&MyCat = &MyColl.ItemByName("Dictionary");
```

Next method: AvailableCategory collection

Syntax

```
Next()
```

Description

The Next method returns the next AvailableCategory object in the AvailableCategory collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

AvailableCategory object.

Example

```
&MyAvailableCategory = &MyCollection.Next();
```

AvailableCategory Collection Property

In this section, we discuss the Count property.

Count property: AvailableCategory collection

Description

This property returns the number of AvailableCategory objects in the AvailableCategory Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

AvailablePagelet Class

An AvailablePagelet is a pagelet object can be assigned to a particular tab. This includes all pagelets from the dynamic categories, and assigned pagelets. Each pagelet also contains the layout data that is specific to that pagelet.

AvailablePagelet objects are instantiated from an AvailablePagelet Collection with the First, ItemByName, or Next methods.

See [AvailablePagelet Collection](#).

AvailablePagelet Class Properties

In this section, we discuss the AvailablePagelet class properties. The properties are discussed in alphabetical order.

CategoryLabel property: AvailablePagelet class

Description

This property turns the label of the category to which the pagelet is assigned, as a string.

This property is read-only.

CategoryName property: AvailablePagelet class

Description

This property returns the name of the category to which the pagelet is assigned, as a string.

This property is read-only.

Column property: AvailablePagelet class

Description

This property returns the column in which this pagelet is displayed, as a number.

This property is read-only.

LayoutBehavior property: AvailablePagelet class

Description

This property indicates whether the user can change when and how the pagelet displays. This property takes a string value.

The values are:

Value	Description
4OPT	The user can choose to add this pagelet to their tab. It doesn't show up by default. The user can remove and reposition this pagelet on the tab.
3DEF	The user sees this pagelet the first time they log in, however, they can remove or reposition this pagelet if they'd like.
2REQ	The user can't remove this pagelet from the tab. However, they are allowed to reposition the pagelet on the tab.
1FIX	The user can't remove this pagelet or change its position on the tab.

This property is read only.

PageletLabel property: AvailablePagelet class

Description

This property returns the label for this property as a string.

This property is read-only.

PageletName property: AvailablePagelet class

Description

This property returns the name for this Pagelet object as a string. The name is a unique identifier for each Pagelet object.

This property is read-only.

Row property: AvailablePagelet class

Description

This property returns the row in which this pagelet is displayed, as a number.

This property is read-only.

AvailablePagelet Collection

An AvailablePagelet collection is returned by the AvailablePagelet TabDefinition method.

It contains a collection of all the pagelets that could be assigned to the tab. It's an aggregation of the pagelets in the AssignedPagelets collection and all the pagelets in each of the categories in the DynamicCategories collection. Pagelet category sequence numbers, followed by pagelet sequence numbers, then name, sort this collection.

If you have two pagelets assigned with the same name (that is, an assigned pagelet and a dynamic category pagelet), the assigned pagelet takes precedence over the dynamic category one, and is the only one listed.

See [AvailablePagelets property: TabDefinition class](#).

See [AvailablePagelet Class](#).

AvailablePagelet Collection Methods

In this section, we discuss the AvailablePagelet collection methods. The methods are discussed in alphabetical order.

First method: AvailablePagelet collection

Syntax

```
First()
```

Description

The First method returns the first AvailablePagelet object in the AvailablePagelet collection.

Parameters

None.

Returns

An AvailablePagelet object.

Example

```
&MyAvailablePagelet = &MyCollection.First();
```

ItemByName method: AvailablePagelet collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the AvailablePagelet object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing AvailablePagelet within the AvailablePagelet collection. If you specify an invalid name, the object is NULL.

Returns

An AvailablePagelet object if successful, NULL otherwise.

Example

```
&MyPagelet = &MyColl.ItemByName("DICTIONARY");
```

Next method: AvailablePagelet collection

Syntax

```
Next()
```

Description

The Next method returns the next AvailablePagelet object in the AvailablePagelet collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

AvailablePagelet object.

Example

```
&MyAvailablePagelet = &MyCollection.Next();
```

AvailablePagelet Collection Property

In this section, we discuss the Count property.

Count property: AvailablePagelet collection

Description

This property returns the number of AvailablePagelet objects in the AvailablePagelet Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

DynamicCategory Collection

A DynamicCategory collection contains a collection of PageletCategory names associated with a TabDefinition. The collection is initially ordered by category name.

When a PageletCategory is dynamic, it is immediately available to an end-user.

A DynamicCategory Collection is instantiated by the DynamicCategories property of a TabDefinition.

See [DynamicCategories property: TabDefinition class](#).

DynamicCategory Collection Methods

In this section, we discuss the DynamicCategory collection methods. The methods are discussed in alphabetical order.

DeleteItem method: DynamicCategory collection

Syntax

```
DeleteItem(Name)
```

Description

The DeleteItem method deletes the PageletCategory object identified by *Name* from the DynamicCategory Collection. This does *not* delete the PageletCategory from the database, just from the DynamicCategory collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Note

If you delete a DynamicCategory, tabs with the attribute PORTAL_HPTAB_DYN lists must be searched for and updated (if necessary) to reflect the deleted category.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing category in the DynamicCategory collection.

Returns

A Boolean value: True if the PageletCategory was deleted from the DynamicCategory collection, False otherwise.

Example

```
If Not &MyColl.DeleteItem("Dictionaries") Then  
    /* do error processing */  
End-If;
```

First method: DynamicCategory collection

Syntax

```
First()
```

Description

The First method returns the name of the first PageletCategory in the DynamicCategory collection.

Parameters

None.

Returns

A string.

Example

```
&MyDynamicCategory = &MyCollection.First();
```

InsertItem method: DynamicCategory collection

Syntax

```
InsertItem(Name)
```

Description

The InsertItem method inserts the PageletCategory object identified by *Name* into the DynamicCategory Collection. This does *not* insert the PageletCategory into the database, just into the DynamicCategory collection. After a PageletCategory is marked as dynamic, it is immediately available to the end-user.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the DynamicCategory to insert.

Returns

A string containing the name of the new DynamicCategory object if the method executed successfully, Null otherwise.

Example

```
&MyCat = &MyColl.InsertItem("User_Info");
```

ItemByName method: DynamicCategory collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the name of the PageletCategory object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing DynamicCategory within the DynamicCategory collection. If you specify an invalid name, this method returns a Null string.

Returns

A string.

Example

```
&MyPagelet = &MyColl.ItemByName("Dictionary");
```

Next method: DynamicCategory collection

Syntax

```
Next()
```

Description

The Next method returns the name of the next PageletCategory object in the DynamicCategory collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A string.

Example

```
&MyDynamicCategory = &MyCollection.Next();
```

DynamicCategory Collection Property

In this section, we discuss the Count property.

Count property: DynamicCategory collection

Description

This property returns the number of PageletCategory names in the DynamicCategory Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

PageletCategory Class

A PageletCategory is a group of related pagelets, such as Weather, News, Reference, and so on. Each PageletCategory has a collection of pagelets associated with it.

A PageletCategory is instantiated from a PageletCategory Collection with the First, InsertItem, ItemByName, or Next methods.

All PageletCategory objects that are dynamic are contained in the DynamicCategory collection. The methods from this collection return the names of the PageletCategory objects only, not references to the objects themselves.

See [PageletCategory Collection](#).

PageletCategory Class Method

In this section, we discuss the Save method.

Save method: PageletCategory class

Syntax

```
Save( )
```

Description

The Save method saves any changes you made to the PageletCategory, for example, a changed description or sequence number.

Parameters

None.

Returns

A Boolean value: True if the PageletCategory object is successfully saved, False otherwise.

Example

```
If Not(&MyPageletCategory.Save()) Then
    /* do error checking */
End-If;
```

PageletCategory Class Properties

In this section, we discuss the PageletCategory class properties. The properties are discussed in alphabetical order.

Attributes property: PageletCategory class

Description

This property returns an Attribute Collection containing the AttributeValues for this PageletCategory object.

This property is read-only.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: PageletCategory class

Description

This property returns the author (PeopleSoft user ID) for this PageletCategory as a string.

This property is read-only.

AuthorAccess property: PageletCategory class

Description

This property specifies whether the author of the PageletCategory has access to the PageletCategory. This property takes a Boolean value. The default value for this property for a newly created object is True. This property is not cascaded.

This property is read/write.

Authorized property: PageletCategory class

Description

This property specifies whether the user is authorized to view this PageletCategory.

The initial value of this property depends on the other permission properties (PublicAccess and AuthorAccess) and the permission list values in the PermissionValue object associated with this PageletCategory.

This property is read-only.

CascadedPermissions property: PageletCategory class

Description

This property returns a PermissionValue Collection. This collection contains the value of the permissions for all the child and parent objects (up to the root PageletCategory). To determine only the permissions of the object use the Permission property instead.

Note

The PORTAL_PAGELETS folder is the parent folder for all PageletCategories. Its security is set to public. PeopleSoft does not recommend cascading any permissions from this folder object. Cascade permissions only from the pagelet category (folder). You *cannot* add any PermissionValue objects to a collection returned by the CascadedPermissions property. You can add values only to the collection returned by the Permissions property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A PermissionValue collection is returned by the following:
- [Permissions property: Folder class](#)

CreationDate property: PageletCategory class

Description

This property returns the creation date for this PageletCategory as a string.

This property is read-only.

Description property: PageletCategory class

Description

This property returns or sets the description for this PageletCategory as a string.

The length of this property is 256 characters.

This property is translatable.

This property is read/write.

Label property: PageletCategory class

Description

This property returns or sets the label for this PageletCategory as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

Name property: PageletCategory class

Description

This property returns the name for this PageletCategory as a sting. The name is a unique identifier for each PageletCategory.

Every PageletCategory name must be unique in across the portal, not just in the parent PageletCategory.

This property is *not* translatable. However, the values for the Label and Description properties are translatable.

This property is read-only.

Related Topics

- [Label property: PageletCategory class](#)

OwnerId property: PageletCategory class

Description

This property returns or sets the owner ID of the PageletCategory object as a string.

This property is read/write.

Pagelets property: PageletCategory class

Description

This property returns a reference to a Pagelet Collection for this PageletCategory.

This property is read-only.

Related Topics

- [Pagelet Collection](#)
The Pagelet Collection provides access to the collection of pagelets in a category.

Permissions property: PageletCategory class

Description

This property returns a PermissionValue Collection. This collection contains the value of the permissions for this PageletCategory.

Note

The PORTAL_PAGELETS folder is the parent folder for all PageletCategories. Its security is set to public. PeopleSoft does not recommend cascading any permissions from this folder object. Cascade permissions only from the pagelet category (folder).

This property is read-only.

Related Topics

- [PermissionValue Collection](#)

A PermissionValue collection is returned by the following:

Product property: PageletCategory class

Description

This property returns or sets the PeopleSoft product for this PageletCategory as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: PageletCategory class

Description

This property indicates whether a PageletCategory is generally accessible, that is, if this property is set to True, any user can access the PageletCategory. This property is not cascaded.

This property takes a Boolean value.

The default value for this property for a newly created object is False.

This property is read/write.

SequenceNumber property: PageletCategory class

Description

The sequence number is used when returning a collection. The default order of the returned PageletCategory objects is based on the sequence number. Use this property to reorder PageletCategory objects.

If there are duplicates in the sequence number, the PageletCategory objects are returned in alphabetical order.

The length of this property is 4 characters.

This property is read/write.

PageletCategory Collection

The PageletCategory Collection provides access to a collection of PageletCategory objects in a PageletCategory object.

The PageletCategory Collection is instantiated from the PageletCategories PortalRegistry property.

See [PageletCategories property: PortalRegistry class](#).

PageletCategory Collection Methods

In this section, we discuss the PageletCategory collection methods. The methods are discussed in alphabetical order.

DeleteItem method: PageletCategory collection

Syntax

```
DeleteItem(PageletCategoryName)
```

Description

The DeleteItem method deletes the PageletCategory object identified by *PageletCategoryName* from the database.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database *as soon* as the method is executed.

Parameters

Parameter	Description
<i>PageletCategoryName</i>	Specify the name of a PageletCategory existing in the PageletCategory collection.

Returns

A Boolean value: True if the PageletCategory was deleted, False otherwise.

Example

```
If Not &MyPageletCategoryColl.DeleteItem("MYPAGELETCATEGORY") Then  
    /* PageletCategory not deleted. Do error checking */  
End-If;
```

First method: PageletCategory collection

Syntax

```
First()
```

Description

The First method returns the first PageletCategory object in the PageletCategory collection.

Parameters

None.

Returns

PageletCategory object.

Example

```
&MyPageletCategory = &MyCollection.First();
```

InsertItem method: PageletCategory collection

Syntax

```
InsertItem(PageletCategoryName, Label)
```

Description

The InsertItem method inserts the PageletCategory object identified by *PageletCategoryName* from the PageletCategory Collection. You must specify both a name and a label for each PageletCategory. This method returns a reference to the new PageletCategory object. You must specify a unique *PageletCategoryName*, or you receive an error.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted into the database as *soon* as the method is executed.

Parameters

Parameter	Description
<i>PageletCategoryName</i>	Specify the name of a PageletCategory existing in the PageletCategory collection. This parameter takes a string value.
<i>Label</i>	Specify a label for the new PageletCategory. This parameter takes a string value.

Returns

A reference to the new PageletCategory object if the method executed successfully, False otherwise.

ItemByName method: PageletCategory collection

Syntax

`ItemByName(Name)`

Description

The `ItemByName` method returns the `PageletCategory` object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing <code>PageletCategory</code> within the <code>PageletCategory</code> collection. If you specify an invalid name, the object is <code>NULL</code> . You must specify a name, not a label.

Returns

A `PageletCategory` object if successful, `NULL` otherwise.

Next method: PageletCategory collection

Syntax

`Next()`

Description

The `Next` method returns the next `PageletCategory` object in the `PageletCategory` collection. You can use this method only after you have used the `First` method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A `PageletCategory` object.

PageletCategory Collection Property

In this section, we discuss the `PageletCategory` collection properties. The properties are discussed in alphabetical order.

Count property: PageletCategory collection

Description

This property returns the number of PageletCategory objects in the PageletCategory Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

Pagelet Class

A pagelet represents a URL that renders a section of content for a homepage. Pagelets are assigned to specific categories.

A pagelet is instantiated from the First, InsertItem, ItemByName, and Next Pagelet Collection methods.

See [Pagelet Collection](#).

Pagelet Class Method

In this section, we discuss the Save method.

Save method: Pagelet class

Syntax

```
Save( )
```

Description

The Save method saves any changes you made to the Pagelet, for example, a changed description or sequence number.

Parameters

None.

Returns

A Boolean value: True if the Pagelet object is successfully saved, False otherwise.

Example

```
If Not(&MyPagelet.Save()) Then  
    /* do error checking */  
End-If;
```


Pagelet Class Properties

In this section, we discuss the Pagelet class properties. The properties are discussed in alphabetical order.

Attributes property: Pagelet class

Description

This property returns an Attribute Collection containing the AttributeValues for this pagelet object.

This property is read-only.

Related Topics

- [Attribute Collection](#)
The Attribute Collection provides access to the collection of Attribute in a Folder or a content reference object.

Author property: Pagelet class

Description

This property returns the author (PeopleSoft user ID) for this pagelet object as a string.

This property is read-only.

AuthorAccess property: Pagelet class

Description

This property specifies whether the author of the pagelet has access to the pagelet. This property takes a Boolean value. The default value for this property is True.

This property is read/write.

Authorized property: Pagelet class

Description

This property specifies whether the user is authorized to view this pagelet.

The initial value of this property depends on the other permission properties (PublicAccess and AuthorAccess) and the permission list values in the PermissionValue object associated with this pagelet.

This property is read-only.

CascadedPermissions property: Pagelet class

Description

This property returns a `PermissionValue` collection. This collection contains the value of the permissions for all the parent objects (up to the root folder). To determine only the permissions of the object use the `Permission` property instead.

Note

You *cannot* add any `PermissionValue` objects to a collection returned by the `CascadedPermissions` property. You can add values only to the collection returned by the `Permissions` property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [Permissions property: Content Reference class](#)

ContentProvider property: Pagelet class

Description

This property returns or sets the name of the node for the pagelet as a string.

If no node was specified when the pagelet was created, this property returns `Null`.

This property is read/write.

CreationDate property: Pagelet class

Description

This property returns the creation date for this pagelet object as a string.

This property is read-only.

DefaultColumn property: Pagelet class

Description

This property returns or sets the default column this pagelet displays in. This property takes a number value.

The default value for this property is 1.

This property is read/write.

Description property: Pagelet class

Description

This property returns or sets the description for this pagelet object as a string.

The length of this property is 256 characters.

This property is translatable.

This property is read/write.

EditPageContentProvider property: Pagelet class

Description

This is the node part of the URL to the page that enables a user to personalize a page. The default value is an empty string.

This property is read/write.

EditPageQueryString property: Pagelet class

Description

This is the query string part of the URL to the page that enables a user to personalize a page. The default value for this property is an empty string.

This property is read/write.

HelpID property: Pagelet class

Description

This property returns the help system identifier for this pagelet. It enables the help system to provide pagelet specific help. This property takes a string value.

This property is read/write.

IsHideMinimize property: Pagelet class

Description

This property specifies if the minimize image icon displays. This property takes a Boolean value: True, display the icon, False, hide the icon. The default value is True.

This property is read/write.

Label property: Pagelet class

Description

This property returns or sets the label for this pagelet object as a string.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

Name property: Pagelet class

Description

This property returns the name for this pagelet object as a string. The name is a unique identifier for each pagelet object.

Every pagelet name must be unique in the portal, not just in the parent folder.

This property is not translatable. However, the values for the Label and Description properties are.

This property is read-only.

OwnerId property: Pagelet class

Description

This property returns or sets the owner ID of the pagelet object as a string.

This property is read/write.

ParentName property: Pagelet class

Description

This property returns the parent folder name for this pagelet object as a string.

This property is read/write.

Permissions property: Pagelet class

Description

This property returns a `PermissionValue` Collection. This collection contains the value of the permissions for this pagelet. To determine the permissions for all the parent objects (up to the root folder) use the `CascadedPermissions` property.

This property is read-only.

Related Topics

- [PermissionValue Collection](#)
A `PermissionValue` collection is returned by the following:
- [CascadedPermissions property: Content Reference class](#)

Product property: Pagelet class

Description

This property returns or sets the PeopleSoft product for this pagelet object as a string.

The length of this property is 4 characters.

This property is read/write.

PublicAccess property: Pagelet class

Description

This property indicates whether a pagelet is generally accessible, that is, if it will always be included in the general pagelet collection. This property takes a Boolean value.

The default value for this property is False.

This property is read/write.

QualifiedURL property: Pagelet class

Description

This property returns an absolute URL. If the pagelet has a node associated with it, the URI from the node is concatenated with the URL from the pagelet. If there is no ContentProvider, this property returns the text in the URL property.

This property is read-only.

Related Topics

- [URL property: Content Reference class](#)

SequenceNumber property: Pagelet class

Description

The sequence number is used when returning a collection. The default order of the returned pagelets is based on the sequence number. Use this property to reorder pagelets. This property takes a number value.

If there are duplicates in the sequence number, the pagelets are returned alphabetically.

The length of this property is 4 characters.

This property is read/write.

URL property: Pagelet class

Description

This property returns or sets the URL for this pagelet object as a string. The URL returns *exactly* as it appears in the database.

If you're setting a URL, you must use a unique URL.

The absolute URL, that is, the URL from the ContentProvider concatenated with this URL must be unique.

You receive an error if the URL you use is already registered.

To retrieve a qualified URL, that is, one that contains the node URI, use the AbsoluteContentURL property.

The length of this property depends on your system database limit for LONG fields.

The format of the value for this property depends on the setting of other properties.

This property is read/write.

URLType property: Pagelet class

Description

This property indicates what kind of PeopleCode definition is used to retrieve the content of the pagelet. This property takes a string value.

Values are:

URLType Value	Meaning
UEXT	URL points to a non-PeopleSoft (external) URL
UPGE	URL points to a component.
UGEN	URL points to a generic PeopleSoft URL
USCR	URL points to an iScript

UPGE is the default value on a new pagelet.

This property is read/write.

Pagelet Collection

The Pagelet Collection provides access to the collection of pagelets in a category.

The Pagelet Collection is instantiated from the Pagelets PageletCategory property.

See [Pagelets property: PageletCategory class](#).

Pagelet Collection Methods

In this section, we discuss the Pagelet collection methods. The methods are discussed in alphabetical order.

DeleteItem method: Pagelet collection

Syntax

```
DeleteItem(PageletName)
```

Description

The DeleteItem method deletes the pagelet object identified by *PageletName* from the pagelet Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database as soon as the method is executed.

Parameters

Parameter	Description
<i>PageletName</i>	Specify the name of a pagelet existing in the pagelet collection.

Returns

A Boolean value: True if the pagelet was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("Test_Pagelet") Then
    /* can't delete test data. Do error processing */
End-if;
```

First method: Pagelet collection

Syntax

```
First()
```

Description

The First method returns the first pagelet object in the pagelet collection.

Parameters

None.

Returns

A reference to a pagelet object if successful, NULL otherwise.

Example

```
&MyCRef = &MyCollection.First();
```

InsertItem method: Pagelet collection

Syntax

```
InsertItem(PageletName, Label, NodeName, URL)
```

Description

The InsertItem method inserts the pagelet object identified by *PageletName* into the pagelet Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted into the database as *soon* as the method is executed.

Parameters

Parameter	Description
<i>PageletName</i>	Specify the name of a new pagelet. This parameter takes a string value. If you specify a name that already exists in the collection, you receive an error.
<i>Label</i>	Specify the label for the new pagelet. This parameter takes a string value.
<i>NodeName</i>	Specify a node. This parameter takes a string value. If you specify a fully qualified URL, you can specify a Null (that is, two quotation marks with no space between them ("")).
<i>URL</i>	Specify a URL that contains the content. The format of this parameter depends on other properties, such as the type of pagelet, where the data is stored, and so on.

Returns

A reference to the new pagelet object if the method executed successfully, NULL otherwise.

Related Topics

- [Using Content References](#)
Content references have a number of properties, but several properties work together to define the type of Content reference. The values of these properties are interdependent, that is, the value of one indicates the values of others.

ItemByName method: Pagelet collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the pagelet object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing pagelet within the pagelet collection. If you specify an invalid name, the object will be NULL.

Returns

A reference to a pagelet object if successful, NULL otherwise.

Example

```
&MyPagelet = &CRefColl.ItemByName("PORTAL_ADMIN);
```

Next method: Pagelet collection

Syntax

```
Next()
```

Description

The Next method returns the next pagelet object in the pagelet collection. You can only use this method after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a pagelet object if successful, NULL otherwise.

Example

```
&MyPagelet = &MyCollection.Next();
```

Pagelet Collection Property

In this section, we discuss the Count property.

Count property: Pagelet collection

Description

This property returns the number of pagelet objects in the pagelet Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

UserHomepage Class

The UserHomepage represents a homepage for a user. It contains all the tabs and pagelets the user has selected for their homepage.

A UserHomepage is instantiated from the Homepage PortalRegistry property.

See [Homepage property: PortalRegistry class](#).

UserHomepage Class Method

In this section, we discuss the Save method.

Save method: UserHomepage class

Syntax

```
Save()
```

Description

The Save method saves any changes you made to the UserHomepage, for example, a changed greeting.

Using this method also saves any changes you've made to any UserTab or SelectedPagelet objects associated with this UserHomepage.

Parameters

None.

Returns

A Boolean value: True if the UserHomepage object is successfully saved, False otherwise.

Example

```
If Not(&MyHP.Save()) Then  
    /* do error checking */  
End-If;
```

UserHomepage Class Properties

In this section, we discuss the UserHomepage properties. The properties are discussed in alphabetical order.

Greeting property: UserHomepage class

Description

This property is a user-definable message that appears on their homepage when they login, such as "My Homepage" or "Welcome." This property takes a text string. The length of this character is 254.

This property is read/write.

UserId property: UserHomepage class

Description

This property returns the UserId for this UserHomepage as a string.

This property is read-only.

UserTab property: UserHomepage class

Description

This property returns a reference to a UserTab collection.

This property is read-only.

Related Topics

- [UserTab Collection](#)
The UserTab collection is the collection of personalized tabs for a user.

UserTab Class

A UserTab is a personalized tab for a specific user. This user can potentially change the pagelets that appear on the tab, the name of the tab, and the order of the tab. All these changes can be allowed or denied on the TabDefinitions Class. The UserTab is used in place of the TabDefinition whenever a user has personalized a tab.

A UserTab object is instantiated from the First, ItemByName, InsertItem, or Next UserTab Collection methods.

See [UserTab Collection](#).

UserTab Class Properties

In this section, we discuss the UserTab class properties. The properties are discussed in alphabetical order.

ColumnLayout property: UserTab class

Description

This property specifies how many columns the UserTab contains. This property takes a numeric value. The values are:

Value	Description
2	Two-column layout
3	Three-column layout. This is the default value.

This property is read/write.

Label property: UserTab class

Description

This property returns or sets the label for this UserTab object as a string. This value is initially set to the Label of the TabDefinition.

The length of this property is 30 characters.

This property is translatable.

This property is read/write.

QualifiedURL property: UserTab class

Description

This property returns an absolute URL as a string. This URL includes the URI from the TabDefinition's node and the URL that points to the actual content of the tab.

This property is read-only.

SelectedPagelets property: UserTab class

Description

This property returns a SelectedPagelets Collection, containing the pagelets that have been selected by the user to appear on this tab.

This property is read-only.

Related Topics

- [SelectedPagelet Collection](#)
The SelectedPagelet collection contains a collection of all the selected pagelets for a tab.

SequenceNumber property: UserTab class

Description

This property specifies the order that this tab should appear as on the homepage. This property takes a number value. This value is initially set by the referenced TabDefinition.

This property is read/write.

TabName property: UserTab class

Description

This property returns the tab name as a sting.

This property is read-only.

UserTab Collection

The UserTab collection is the collection of personalized tabs for a user.

The UserTab Collection is instantiated from the UserTabs UserHomepage property.

See [UserTab property: UserHomepage class](#).

UserTab Collection Methods

In this section, we discuss the UserTab collection methods. The methods are discussed in alphabetical order.

DeleteItem method: UserTab collection

Syntax

```
DeleteItem(UserTabName)
```

Description

The DeleteItem method deletes the UserTab object identified by *UserTabName* from the UserTab Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>UserTabName</i>	Specify the name of a UserTab existing in the UserTab collection.

Returns

A Boolean value: True if the UserTab was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("Test_UserTab") Then  
    /* can't delete test data. Do error processing */  
End-if;
```

First method: UserTab collection

Syntax

```
First()
```

Description

The First method returns the first UserTab object in the UserTab collection.

Parameters

None.

Returns

A UserTab object.

Example

```
&MyUserTab = &MyCollection.First();
```

InsertItem method: UserTab collection

Syntax

```
InsertItem(UserTabName)
```

Description

The InsertItem method inserts the UserTab object identified by *UserTabName* into the UserTab Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

The new user tab must be unique within the portal.

Parameters

Parameter	Description
<i>UserTabName</i>	Specify the name of a new UserTab. This parameter takes a string value. If you specify a name that already exists in the collection, you get an error.

Returns

A reference to the new UserTab object if the method executed successfully, NULL otherwise.

ItemByName method: UserTab collection

Syntax

`ItemByName(Name)`

Description

The `ItemByName` method returns the `UserTab` object with the name *Name*.

Parameters

Parameter	Description
Name	Specify the name of an existing <code>UserTab</code> within the <code>UserTab</code> collection. If you specify an invalid name, the object is <code>NULL</code> .

Returns

A `UserTab` object if successful, `NULL` otherwise.

Example

```
&MyUserTab = &MyColl.ItemByName("PORTAL_ADMIN");
```

Next method: UserTab collection

Syntax

`Next()`

Description

The `Next` method returns the next `UserTab` object in the `UserTab` collection. You can use this method only after you have used the `First` method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A `UserTab` object.

Example

```
&MyUserTab = &MyCollection.Next();
```

UserTab Collection Property

In this section, we discuss the Count property.

Count property: UserTab collection

Description

This property returns the number of UserTab objects in the UserTab Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

SelectedPagelet Class

The SelectedPagelet class contains data on pagelets selected by the user that display on this tab.

A SelectedPagelet object is instantiated by the First, InsertItem, ItemByName, and Next SelectedPagelet Collection methods.

See [SelectedPagelet Collection](#).

SelectedPagelet Class Properties

In this section, we discuss the SelectedPagelet class properties. The properties are discussed in alphabetical order.

CategoryName property: SelectedPagelet class

Description

This property returns the category of the pagelet as a string.

This property is read-only.

Column property: SelectedPagelet class

Description

This property returns the number of the column the pagelet displays in, as a number.

The values are:

Value	Description
1	First column
2	Second column
3	Third column

This property is read/write.

IsMinimized property: SelectedPagelet class

Description

This property specifies whether the pagelet is displayed minimized. This property takes a Boolean value: True, the pagelet is minimized, False otherwise.

This property is read/write.

PageletName property: SelectedPagelet class

Description

This property returns the name of the pagelet as a string.

This property is read-only.

Row property: SelectedPagelet class

Description

This property specifies which row the pagelet is displayed in, as a number.

This property is read/write.

SelectedPagelet Collection

The SelectedPagelet collection contains a collection of all the selected pagelets for a tab.

A SelectedPagelet collection is instantiated by the SelectedPagelets UserTab property.

See [SelectedPagelets property: UserTab class](#).

SelectedPagelet Collection Methods

In this section, we discuss the SelectedPagelet collection methods. The methods are discussed in alphabetical order.

DeleteItem method: SelectedPagelet collection

Syntax

```
DeleteItem(SelectedPageletName)
```

Description

The DeleteItem method deletes the SelectedPagelet object identified by *SelectedPageletName* from the SelectedPagelet Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>SelectedPageletName</i>	Specify the name of a SelectedPagelet existing in the SelectedPagelet collection.

Returns

A Boolean value: True if the SelectedPagelet was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("Test_SelectedPagelet") Then
    /* can't delete test data. Do error processing */
End-if;
```

First method: SelectedPagelet collection

Syntax

First()

Description

The First method returns the first SelectedPagelet object in the SelectedPagelet collection.

Parameters

None.

Returns

A SelectedPagelet object.

Example

```
&MySelectedPagelet = &MyCollection.First();
```

InsertItem method: SelectedPagelet collection

Syntax

InsertItem(*SelectedPageletName*, *Column*, *Row*)

Description

The InsertItem method inserts the SelectedPagelet object identified by *SelectedPageletName* into the SelectedPagelet Collection.

This method is not executed automatically. It is executed only when the parent object is saved.

Parameters

Parameter	Description
<i>SelectedPageletName</i>	Specify the name of a new SelectedPagelet. This parameter takes a string value. If you specify a name that already exists in the collection, you get an error.
<i>Column</i>	Specify the column number for this pagelet.
<i>Row</i>	Specify the row number for this pagelet.

Returns

A reference to the new SelectedPagelet object if the method executed successfully, NULL otherwise.

ItemByName method: SelectedPagelet collection

Syntax

`ItemByName(Name)`

Description

The ItemByName method returns the SelectedPagelet object with the name *Name*.

Parameters

Parameter	Description
Name	Specify the name of an existing SelectedPagelet within the SelectedPagelet collection. If you specify an invalid name, the object is NULL.

Returns

A SelectedPagelet object if successful, NULL otherwise.

Example

```
&MySelectedPagelet = &MyColl.ItemByName("PORTAL_ADMIN");
```

Next method: SelectedPagelet collection

Syntax

`Next()`

Description

The Next method returns the next SelectedPagelet object in the SelectedPagelet collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A SelectedPagelet object.

Example

```
&MySelectedPagelet = &MyCollection.Next();
```

SelectedPagelet Collection Property

In this section, we discuss the Count property.

Count property: SelectedPagelet collection

Description

This property returns the number of SelectedPagelet objects in the SelectedPagelet Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Favorite Class

A favorite represents a content reference the user wants to keep a shortcut to. It contains the name of the content reference and the label the user wants to see displayed for this favorite. Labels must be unique in each favorite collection.

Use the Save method of the Favorite class to save any changes you made to any favorite objects.

A favorite object is instantiated by the First, InsertItem, ItemByName, and Next Favorite Collection methods.

See [Favorite Collection](#).

Favorite Class Properties

In this section, we discuss the Favorite class properties. The properties are discussed in alphabetical order.

CRefName property: Favorite class

Description

This property returns the name of the content reference as a string.

This property is read-only.

IsFolder property: Favorite class

Description

This property specifies a Boolean value indicating whether the favorite is a folder object. True, the favorite is a folder, False otherwise.

This property is read-only.

Label property: Favorite class

Description

This property specifies the description of the favorite that's displayed to the user. This label must be unique for the favorite collection.

This property is read/write.

QualifiedURL property: Favorite class

Description

This property returns the qualified URL for the content reference based on the Node and the URL for the name of the content reference, as a string.

This property is read-only.

SequenceNumber property: Favorite class

Description

This property returns the sequence number used to order favorites.

This property is read/write.

URL property: Favorite class

Description

This property returns the relative URL for this favorite as a string.

For example, the following code:

```
&URL = &MyFavorite.URL;
```

could return the following string:

C:/PORTAL_PERS_HOMEPAGE.PORTAL_HOMEPAGE.GBL?PORTALPARAM_PAGE=CONTENT&tab=>
DEFAULT&PortalFavorite=QEDMO

This property is read/write.

Favorite Collection

The favorite collection provides access to the favorites for a particular user.

A favorite collection is instantiated by the Favorites PortalRegistry property.

See [Favorites property: PortalRegistry class.](#)

Favorite Collection Methods

In this section, we discuss the Favorite collection methods. The methods are discussed in alphabetical order.

Deleteltem method: Favorite collection

Syntax

DeleteItem(*FavoriteLabel*)

Description

The `DeleteItem` method deletes the Favorite object identified by *FavoriteLabel* from the Favorite Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for deletion, then actually deleted later. The item is deleted from the database as *soon* as the method is executed.

Parameters

Parameter	Description
<i>FavoriteLabel</i>	Specify the label of a Favorite existing in the Favorite collection, that is, the text used to identify the favorite to the end-user.

Returns

A Boolean value: True if the Favorite was deleted, False otherwise.

Example

```
If Not &MyColl.DeleteItem("My Local Test") Then
    /* can't delete test data. Do error processing */
End-if;
```

First method: Favorite collection

Syntax

First()

Description

The First method returns the first Favorite object in the Favorite collection.

Parameters

None.

Returns

A Favorite object.

Example

```
&MyFav = &MyCollection.First();
```

InsertFolderItem method: Favorite collection

Syntax

InsertFolderItem(*FavoriteLabel*, *FavoriteName*)

Description

Use the InsertFolderItem method to insert the Favorite folder object identified by FavoriteName into the Favorite collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted to the database as soon as the method is executed.

Parameters

Parameter	Description
<i>FavoriteLabel</i>	Specify a label for the new Favorite folder as a string. This is the text by which the favorite is identified to the end user.
<i>FavoriteName</i>	Specify the name for the new Favorite folder as a string. If you specify a name that already exists in the collection, you get an error.

Returns

A reference to the new Favorite object if the method executes successfully, Null otherwise.

InsertItem method: Favorite collection

Syntax

```
InsertItem(FavoriteLabel, FavoriteName)
```

Description

The InsertItem method inserts the Favorite object identified by *FavoriteName* into the Favorite Collection.

Note

The portal registry classes execute some methods "interactively", that is, as they happen. The item won't be marked for insertion, then actually inserted later. The item is inserted to the database as soon as the method is executed.

Parameters

Parameter	Description
<i>FavoriteLabel</i>	Specify a label for the new Favorite. This is the text by which the favorite is identified to the end-user.
<i>FavoriteName</i>	Specify the name of a new Favorite. This parameter takes a string value. If you specify a name that already exists in the collection, you get an error.

Returns

A reference to the new Favorite object if the method executed successfully, NULL otherwise.

ItemByLabel method: Favorite collection

Syntax

```
ItemByLabel(FavoriteLabel)
```

Description

The ItemByLabel method returns the Favorite object with the label *FavoriteLabel*. The label is the text used to identify the favorite to the end-user.

Parameters

Parameter	Description
<i>FavoriteLabel</i>	Specify the label of an existing Favorite within the Favorite collection. If you specify an invalid favorite, the object returned is Null.

Returns

A Favorite object if successful, Null otherwise.

Example

```
&MyFavorite = &MyColl.ItemByLabel("My Local Login");
```

Next method: Favorite collection

Syntax

```
Next()
```

Description

The Next method returns the next Favorite object in the Favorite collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A Favorite object.

Example

```
&MyFavorite = &MyCollection.Next();
```

Save method: Favorite collection

Syntax

Save()

Description

Use the Save method to save any changes you made to the Favorite collection.

Parameters

None.

Returns

A Boolean value: True, the collection saved successfully, False otherwise.

Favorite Collection Property

In this section, we discuss the Count property.

Count property: Favorite collection

Description

This property returns the number of Favorite objects in the Favorite Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count
```

Portal Registry Classes Example

There are several actions you may want to perform using a PortalRegistry, such as adding a folder, changing permissions, and so on. The following examples discuss the most common tasks. In addition, there are example programs of accessing the PortalRegistry classes using language environments other than PeopleCode.

Changing PortalRegistry Properties

This example shows how to change the default template used by a PortalRegistry. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MySession;  
Local ApiObject &MyPortal, &MyPortalColl;  
  
/* Access the current session */  
  
&MySession = %Session;
```

```

If NOT &MySession Then
    /* do error processing */
End-if;

&MyPortalColl = &MySession.FindPortalRegistries();

For &I = 1 to &MyPortalColl.Count

    &MyPortal = &MyPortalColl.Item(&I);

    If &MyPortal.DefaultTemplate = "HR99" Then
        &MyPortal.DefaultTemplate = "HR00"
        &MyPortal.Save();
    End-If

End-For;

```

To change PortalRegistry properties:

1. Get a Session object.

Before you can access a PortalRegistry object, you must get a session object. The session controls access to the registry, provides error tracing, enables you to set the runtime environment, and so on. Because you want to use the existing session, use the %Session system variable (instead of the GetSession function.)

```
&MySession = %Session;
```

2. Get a PortalRegistry collection.

Use the FindPortalRegistries method with no parameters to return a collection of all the PortalRegistries because you want to check all the registries for the invalid template.

```
&MyPortalColl = &MySession.FindPortalRegistries();
```

Use the Count property on the collection to loop through all the registries.

```
For &I = 1 to &MyPortalColl.Count
```

3. Get a PortalRegistry object.

You can access a PortalRegistry object from the PortalRegistry collection using the Item method.

```
&MyPortal = &MyPortalColl.Item(&I);
```

4. Check for the invalid template and correct if necessary.

Use the DefaultTemplate property both to check for the invalid template name, and to set the correct template. Save the PortalRegistry when you make a correction.

```

If &MyPortal.DefaultTemplate = "HR99" Then
    &MyPortal.DefaultTemplate = "HR00"
    &MyPortal.Save();
End-If;

```

You may want to do error checking after you save the PortalRegistry.

Adding a ContentProvider

The following example adds a ContentProvider to an existing PortalRegistry. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MyPortal;  
Local ApiObject &MyCPColl, &MyCProvider;  
  
&MyPortal = %Session.GetPortalRegistry();  
  
If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then  
    /* Do error handling */  
End-if;  
  
/* Add a ContentProvider */  
  
&MyCPColl = &MyPortal.ContentProviders;  
  
&MyCProvider = &MyCPColl.InsertItem("HRMS_00");  
  
&MyCProvider.URI = "http://MYMACHINE103100/servlets/iclientservlet/HRMS/";  
&MyCProvider.DefaultTemplate = "MYPORTAL_HRMS";  
&MyCProvider.Description = "Updated Content Provider for HRMS";  
  
If NOT(&MyPortal.Save()) Then  
    &ErrorCol = &MySession.PSMessages;  
    For &I = 1 to &ErrorCol.Count  
        &Error = &ErrorCol.Item(&I);  
        /* do error processing */  
    End-For;  
&ErrorCol.DeleteAll();  
End-If;
```

To add a ContentProvider:

1. Get a Session object and a PortalRegistry.

Before you can access a PortalRegistry object, you must get a session object. The session controls access to the registry, provides error tracing, enables you to set the runtime environment, and so on. Because you want to use the existing session, use the %Session system variable (instead of the GetSession function.) In addition, you want to get a PortalRegistry. Using the GetPortalRegistry method returns a reference to an unpopulated PortalRegistry object.

```
&MyPortal = %Session.GetPortalRegistry();
```

2. Open the PortalRegistry.

After you get a PortalRegistry object, you want to open it, that is, populate it with data. Use the Open method to do this. The Open method returns a Boolean value, and this example uses that value to do error checking to make sure that the PortalRegistry is actually

opened. In addition, the name of the PortalRegistry is kept in the record MYRECORD, in the field PORTAL_NAME.

```
If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then
    /* Do error handling */
End-if;
```

3. Access the ContentProvider collection.

You can only add a ContentProvider to a ContentProvider collection. So you must access a ContentProvider collection first, using the ContentProviders property on a PortalRegistry.

```
&MyCPColl = &MyPortal.ContentProviders;
```

4. Add the ContentProvider.

You must use the name of the ContentProvider with the InsertItem method. This example uses HRMS_00. This method does *not* execute automatically, that is, the ContentProvider isn't actually inserted into the database until the PortalRegistry is saved.

```
&MyCProvider = &MyCPColl.InsertItem("HRMS_00");
```

5. Further define the ContentProvider.

The URI of a ContentProvider is used in conjunction with content references to define the location of content. So you should define the URI. If a template isn't found for any of the content references on a page at runtime, the system next tries to use the DefaultTemplate defined for a ContentProvider, so you should define a default template.

```
&MyCProvider.URI = "http://MYMACHINE103100/servlets/iclientservlet/HRMS/";
&MyCProvider.DefaultTemplate = "MYPORAL_HRMS";
&MyCProvider.Description = "Updated Content Provider for HRMS";
```

6. Save the PortalRegistry and check for errors.

Because there is no Save method with a ContentProvider, you must save the PortalRegistry to complete your changes.

You can check if there were any errors using the PSMessages property on the session object.

```
If NOT(&MyPortal.Save()) Then
    /* save didn't complete */
    &ErrorCol = &MySession.PSMessages;
    For &I = 1 to &ErrorCol.Count
        &Error = &ErrorCol.Item(&I);
        /* do error processing */
    End-For;
    &ErrorCol.DeleteAll();
End-if;
```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, delete it from the PSMessages collection.

Note

If you've called the portal registry API from an Application Engine program, all errors are also logged in the Application Engine error log tables.

See [Error Handling](#).

Adding a Folder

The following example checks to see if a folder for a user exists. If it doesn't, it creates one.

The folder hierarchy for this example is as follows. The Users folder is where the portal stores things such as user homepages:

Root folder

Users folder

 UserId1 folder

 UserId2 folder

 UserId3 folder

 . . .

The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MyPortal;  
Local ApiObject &UserFldrColl, &UserFldr;  
  
&MyPortal = %Session.GetPortalRegistry();  
  
If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then  
    /* Do error handling */  
End-if;  
  
&UserFldrColl = &MyPortal.RootFolder.Folders.ItemByName("Users").Folders;  
  
&UserFldr = &UserFldrColl.ItemByName(%UserId);  
If &UserFldr = Null Then  
  
    /* add Folder */  
  
    &UserFldr = &UserFldrColl.InsertItem(%UserId, %UserId);  
    &UserFldr.Description = %UserId;  
  
    /* Set dates */
```

```

        &UserFldr.ValidFrom = %Date;
        &ToDate = AddToDate(%Date, 1, 1, 0);
        &UserFldr.ValidTo = &ToDate;

/* Set properties */

        &UserFldr.PublicAccess = True;

/* save the folder */

        &UserFldr.Save();

End-If;

```

To add a folder:

1. Get a Session object and a PortalRegistry.

Before you can access a PortalRegistry object, you must get a session object. The session controls access to the registry, provides error tracing, enables you to set the runtime environment, and so on. Because you want to use the existing session, use the %Session system variable (instead of the GetSession function.) In addition, you want to get a PortalRegistry. Using the GetPortalRegistry method returns a reference to an unpopulated PortalRegistry object.

```
&MyPortal = %Session.GetPortalRegistry();
```

2. Open the PortalRegistry.

After you get a PortalRegistry object, you want to open it, that is, populate it with data. Use the Open method to do this. The Open method returns a Boolean value, and this example uses that value to do error checking to make sure that the PortalRegistry is actually opened. In addition, the name of the PortalRegistry is kept in the record MYRECORD, in the field PORTAL_NAME.

```

If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then
    /* Do error handling */
End-if;

```

3. Access the User folder collection.

One of the strengths of dot notation is being able to string together many methods and properties into a single line of code. The result of this single line of code is to return a reference to the folder collection within the Users folder.

```
&UserFldrColl = &MyPortal.RootFolder.Folders.ItemByName("Users").Folders;
```

Note that in this kind of code, you must access the RootFolder for the PortalRegistry before you can access the folders collection.

If there were additional folders in your hierarchy, you could continue in the same way, using ItemByName and Folders.

4. Check if the user already has a folder.

The system variable %UserId returns the user ID of the current user. Then this example uses the ItemByName method on the folder collection to see if the user already has a folder. This assumes that the user folders are names according to the UserId. The

ItemByName method returns a reference to the folder if it exists. If the folder does not exist, ItemByName returns NULL.

```
&UserFldr = &UserFldrColl.ItemByName(%UserId);
```

```
If &UserFldr = Null Then
```

5. Add a folder if one doesn't exist.

Use the UserId as the name of the folder, as well as for the label and the description.

```
&UserFldr = &UserFldrColl.InsertItem(%UserId, %UserId);  
&UserFldr.Description = %UserId;
```

6. Set the ValidFrom and ValidTo dates.

For this example, the folder should be accessible from the date it's created, so the example sets the ValidFrom property to be today's date.

When you first create a folder, the ValidTo date, that is, the date that this folder "expires", is set to null, that is an empty string. This means it never expires. In this example, we set the ValidTo date to one year and one day after the current date.

```
&UserFldr.ValidFrom = %Date;  
&ToDate = AddToDate(%Date, 1, 1, 0);  
&UserFldr.ValidTo = &ToDate;
```

7. Set permissions for the folder.

There are several properties that work together to determine the access of a folder or content reference. This example sets the PublicAccess property to True, which means that everyone has access to it, and it's included in all collections of folders.

```
&UserFldr.PublicAccess = True;
```

This example sets only the permission properties on the folder. It doesn't set all the possible permissions, such as the PermissionValue objects for the folder.

8. Save the folder.

After you have finished your changes to the folder, save it.

```
&UserFldr.Save();
```

You may want to check for errors after you save each folder.

See [Using Security](#).

Adding a Content Reference

The following code example adds a content reference that's a target component to the Approve Expenses folder.

The folder hierarchy for this example is:

Root folder

Expenses folder

Create Expenses folder

Review Expenses folder

Approve Expenses folder

The following is the complete code sample: the steps explain each line.

```

Local ApiObject &MyPortal;
Local ApiObject &CRef, &CRefColl;
Local ApiObject &Fldr;

&MyPortal = %Session.GetPortalRegistry();

If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then
    /* Do error handling */
End-if;
&Fldr =
&MyPortal.RootFolder.Folders.ItemByName("Expenses").Folders.ItemByName(
("Approve Expenses"));

/* add content reference */

&CRef = &Fldr.ContentRefs.InsertItem(&CRefname, MYCP, MYRECORD.MYURL);
&CRef.Description = &CRefname;

/* Set dates */
&CRef.ValidFrom = %Date;
&ToDate = AddToDate(%Date, 1, 1, 0);
&CRef.ValidTo = &ToDate;

/* Set content reference types */
&CRef.UsageType = "TARG"; /* Target content reference */
&CRef.URLType = "UPGE"; /* Component type of content reference */
&CRef.StorageType = "RMTE"; /* Template is remote. */
&CRef.Template = "EXPENSES_TEMPLATE"; /* name of template */
&CRef.TemplateType = "HTML"; /* type of Template */
/* Set URL */
&CRef.URL =
"ICType=Panel&Menu=MANAGE_EXPENSES&Market=GBL&Component=APPROVE_FINAL"

/* Save the content reference */

&CRef.Save();

```

To add a content reference:

1. Get a Session object and a PortalRegistry.

Before you can access a PortalRegistry object, you must get a session object. The session controls access to the registry, provides error tracing, enables you to set the runtime environment, and so on. Because you want to use the existing session, use the %Session system variable (instead of the GetSession function.) In addition, you want to get a PortalRegistry. Using the GetPortalRegistry method returns a reference to an unpopulated PortalRegistry object.

```
&MyPortal = %Session.GetPortalRegistry();
```

2. Open the PortalRegistry.

After you get a PortalRegistry object, you want to open it, that is, populate it with data. Use the Open method to do this. The Open method returns a Boolean value, and this example uses that value to do error checking to make sure that the PortalRegistry is actually opened. In addition, the name of the PortalRegistry is kept in the record MYRECORD, in the field PORTAL_NAME.

```
If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then  
    /* Do error handling */  
End-if;
```

3. Access the folder collection.

One of the strengths of dot notation is being able to string together many methods and properties into a single line of code. The result of this single line of code is to return a reference to the folder collection within the folder.

```
&Fldr =  
&MyPortal.RootFolder.Folders.ItemByName("Expenses").Folders.ItemByName(  
    "Approve Expenses");
```

The Adding a Folder example has more explanation on the break down of this line of code.

4. Add the content reference.

You can only add content references from the collection of content references for the folder. After you have the content reference collection, use the InsertItem method to add the content reference. The ContentProvider for this content reference is named MYCP. The URL is stored in the record MYRECORD in the field MYURL.

```
&CRef = &Fldr.ContentRefs.InsertItem(&CRefname, MYCP, MYRECORD.MYURL);  
&CRef.Description = &CRefname;
```

Note that the InsertItem method adds the content reference to the database as soon as it's executed. You could check for errors at this point to see if the content reference was added correctly.

5. Set the ValidFrom and ValidTo dates.

For this example, the content reference should be accessible from the date it's created, so the example sets the ValidFrom property to be today's date.

When you first create a content reference, the ValidTo date, that is, the date that this content reference "expires", is set to null, that is an empty string. This means it never

expires. In this example, we set the ValidTo date to one year and one day after the current date.

```
&CRef.ValidFrom = %Date;
&ToDate = AddToDate(%Date, 1, 1, 0);
&CRef.ValidTo = &ToDate;
```

6. Set the type parameters.

Many content reference properties work together to set the type of content reference.

In this example, the content reference is a target. It's a component type of content reference, which means it's a PeopleSoft definition. The template to be used for displaying this content reference is stored remotely, its name is EXPENSES_TEMPLATE, and it's an HTML template.

```
&CRef.UsageType = "TARG"; /* Target content reference */
&CRef.URLType = "UPGE"; /* Component type of content reference */
&CRef.StorageType = "RMTE"; /* Template is remote. */
&CRef.Template = "EXPENSES_TEMPLATE"; /* name of template */
&CRef.TemplateType = "HTML"; /* type of Template */
```

7. Set the URL.

The URL property of the content reference indicates where the content actually is. As this content reference is referencing a page, the URL has a specific format to indicate which page.

```
&CRef.URL =
"ICType=Panel&Menu=MANAGE_EXPENSES&Market=GBL&Component=APPROVE_FINAL"
```

8. Save the content reference.

After you have finished adding the content reference, you should save it.

```
&CRef.Save();
```

You may want to check for errors after you save each content reference.

See [Adding a Folder](#).

Setting Permissions Using the PermissionValue Object

The following code example adds permissions for a folder through the PermissionValue object.

The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MyPortal;
Local ApiObject &UserFldr;
Local ApiObject &PermV, &PermVColl;

&MyPortal = %Session.GetPortalRegistry();

If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then
    /* Do error handling */
End-if;
&UserFldr = &MyPortal.RootFolder.Folders.ItemByName("Users");
```

```

&CascadedColl = &UserFldr.CascadedPermissions;

&PermV = &CascadedColl.ItemByName("VENDOR1");

If NOT &PermV Then
    &PermVColl = &UserFldr.Permissions;
    &PermVColl.InsertItem("VENDOR1");
    &UserFldr.Save();
End-If;

```

To set permissions for a folder, using the PermissionValue object:

1. Get a Session object and a PortalRegistry.

Before you can access a PortalRegistry object, you must get a session object. The session controls access to the registry, provides error tracing, enables you to set the runtime environment, and so on. Because you want to use the existing session, use the %Session system variable (instead of the GetSession function.) In addition, you want to get a PortalRegistry. Using the GetPortalRegistry method returns a reference to an unpopulated PortalRegistry object.

```
&MyPortal = %Session.GetPortalRegistry();
```

2. Open the PortalRegistry.

After you get a PortalRegistry object, you want to open it, that is, populate it with data. Use the Open method to do this. The Open method returns a Boolean value, and this example uses that value to do error checking to make sure that the PortalRegistry is actually opened. In addition, the name of the PortalRegistry is kept in the record MYRECORD, in the field PORTAL_NAME.

```

If NOT &MyPortal.Open(MYRECORD.PORTAL_NAME) Then
    /* Do error handling */
End-if;

```

3. Access the User folder.

One of the strengths of dot notation is being able to string together many methods and properties into a single line of code. The result of this single line of code is to return a reference to the folder named Users.

```
&UserFldr = &MyPortal.RootFolder.Folders.ItemByName("Users");
```

4. Access the entire, cascaded PermissionValue collection.

There are two types of PermissionValue collections you can access for a folder.

- One contains only the permission list values that are set at that folder. This collection is returned with the Permissions property.
- The other contains all the permission list values for folder, that is, it contains any permission list values set in any parent folder and cascaded. This collection is returned with the CascadedPermissions property.

Note

You *cannot* add any `PermissionValue` objects to a collection returned by the `CascadedPermissions` property. You can add values only to the collection returned by the `Permissions` property.

This example uses the `CascadedPermissions` collection to check if the permission exists, because we don't want to add a permission if it already exists. Then it uses the `Permissions` collection to add the value.

```
&CascadedColl = &UserFldr.CascadedPermissions;
```

1. Check to see if the permission list value exists.

Before adding the new `PermissionValue` object, you want to make sure one by that name doesn't already exist.

```
&PermV = &CascadedColl.ItemByName("VENDOR1");
```

2. If the `PermissionValue` doesn't exist, add it.

The `ItemByName` returns a reference to a `PermissionValue` object if it exists, or `NULL` if it doesn't. So this example checks for `NULL`, and adds the `PermissionValue` if it doesn't exist.

Notice that this example is *not* changing the `Cascaded` property with the `PermissionValue` object. The default value for a new `PermissionValue` object is `False`. As this example does not want to cascade the permissions for this permission list, it retains the default value.

In addition, if the `PermissionValue` object is added, the folder is saved. The `InsertItem` method executes only after the parent object, the folder, is saved.

```
If NOT &PermV Then
    &PermVColl = &UserFldr.Permissions;
    &PermVColl.InsertItem("VENDOR1");
    &UserFldr.Save();
End-If;
```

You may want to check for errors after you save the folder.

See [Permissions property: Folder class](#), [CascadedPermissions property: Folder class](#).

See [Using PermissionValue, RolePermissionValue, Cascading Permissions and CascadingRolePermissions](#).

Using Attributes

The following example uses attributes for a folder to determine what is displayed to an end-user. The end-user still has access to the content, however, it isn't displayed. This program doesn't discuss how to hide or display content: it just shows the function used to determine if a folder should be displayed.

The following is the complete code sample: the steps explain each line.

```
Function checkVisible(&FolderId As ApiObject) Returns Boolean
    &colAttrib = &FolderId.Attributes;
```

```

    If &colAttrib.ItemByName("PORTAL_HIDE_FROM_NAV") <> Null Then
        If &colAttrib.ItemByName("PORTAL_HIDE_FROM_NAV").value = "TRUE" Then
            &display = False;
        End-If;
    End-If;

    Return &display;

End-Function;

```

To use attributes for a folder:

1. Access the folder attribute collection.

A reference to a folder is passed into the function. Then the example uses the `Attributes` property on the folder to access the attribute collection for the folder.

```
&colAttrib = &FolderId.Attributes;
```

2. Check to see if the folder should be hidden.

This step is actually two checks. The first check is to see if there is an attribute with the folder called `PORTAL_HIDE_FROM_NAV`. If the folder has such an attribute, the second check determines the value of this attribute. If both are true, the folder should be hidden, so the variable `&display` is set to `True`, and returned.

```

    If &colAttrib.ItemByName("PORTAL_HIDE_FROM_NAV") <> Null Then
        If &colAttrib.ItemByName("PORTAL_HIDE_FROM_NAV").value = "TRUE" Then
            &display = False;
        End-If;
    End-If;

    Return &display;

```

Visual Basic Example

The following is an example referencing a `PortalRegistry` object using Visual Basic.

```

Dim oCref As ContentRef
Dim oCrefColl As ContentRefCollection

Set oSession = CreateObject("PeopleSoft.Session")
iResult = oSession.Connect(1, AppServStr, OperID, OperPasswd, 0)
Set oPortal = oSession.GetPortalRegistry
iResult = oPortal.Open("PORTAL")
Set oCrefColl = oPortal.RootFolder.ContentRefs
Set oCref = oCrefColl.InsertItem("papi012")
iResult = oPortal.Close
iResult = oPortal.Open("PORTAL")
Set oCref = oPortal.FindCrefByName("papi012")
oPortal.Close
oSession.Disconnect
Exit Sub

```

C/C++ Example

The following is a C/C++ example.

```

/*****
 *
 * psportal_test.cpp
 *
 *****/
 *
 * Confidentiality Information:
 *
 * This module is the confidential and proprietary information of
 * PeopleSoft, Inc.; it is not to be copied, reproduced, or
 * transmitted in any form, by any means, in whole or in part,
 * nor is it to be used for any purpose other than that for which it
 * is expressly provided without the written
 * permission of PeopleSoft.
 *
 * Copyright (c) 1988-1999 PeopleSoft, Inc. All Rights Reserved.
 *
 *****/
 * SourceSafe Information:
 *
 * $Logfile:: $*
 * $Revision:: $*
 * $Date:: $*
 *
 *****/
/*****
 *
 * includes
 *
 *****/

#ifdef PS_WIN32
#include "stdafx.h"
#endif

#include "bcdef.h"
#include "apiadapterdef.h"
#include "peoplesoft_peoplesoft_i.h"

#include <stdio.h>
#include <iostream.h>
#include <wchar.h>

/*****
 *
 * general defines and macros
 *
 *****/

/*****
 *
 * globals
 *
 *****/
HPSAPI_SESSION hSession;

```

```

/*****
 *      function prototypes
 *****/
void DisconnectSession();
void GetFolder(HPSAPI_SESSION hSession, LPTSTR pszPortalName);
void OutError(HPSAPI_SESSION hSession);

/*****
 * Function:      main
 *
 * Description:
 *
 * Returns:
 *****/
void main(int argc, char* argv[])
{
    // Declare variables
    PSAPIVARBLOB    blobExtra;
    TCHAR szServer[80] = _T("//LCHE0110:900");
    TCHAR szUserId[30] = _T("PTM0");
    TCHAR szUserPswd[80] = _T("PT");
    TCHAR szPortalName[80] = _T("PORTAL");
    memset(&blobExtra, 0, sizeof(PSAPIVARBLOB));

    // Establish a PeopleSoft Session.
    HPSAPI_SESSION hSession = PeopleSoft_Session_Create();
    if (PeopleSoft_Session_Connect(hSession, 1, szServer, szUserId,
szUserPswd,
blobExtra))
    {
        GetFolder(hSession, szPortalName);
    }
    else
    {
        // Connect to AppServer Failed. Error out.
        if (PeopleSoft_Session_GetErrorPending(hSession))
        {
            wprintf(L"\nConnect to AppServer Failed.\n");
            OutError(hSession);
        }
        else
            wprintf(L"No error pending from session.\n");
    }
    DisconnectSession();
}

/*****
 *      function implementations
 *****/
/*****
 * Function:      DisconnectSession
 *
 * Description:   Disconnects the Session object.
 *
 * Returns:      None
 *****/
void DisconnectSession()

```



```

{
    // Disconnect current session to free memory and session variables.
    if (hSession)
    {
        if (PeopleSoft_Session_Disconnect(hSession))
        {
            PeopleSoft_Session_Release(hSession);
        }
        else
        {
            wprintf(L"Disconnect to AppServer Failed.\n");
        }
    }
}

/*****
* Function:      GetFolder
*
* Description:   Get root folder and display folder name
*
* Returns:       None
*****/
void GetFolder(HPSAPI_SESSION hSession, LPTSTR pszPortalName)
{
    LPTSTR          szStr;
    HPSAPI_PORTALREGISTRY hPortal;
    HPSAPI_FOLDER    hRootFolder;
    hPortal=(HPSAPI_PORTALREGISTRY)
    PeopleSoft_Session_GetPortalRegistry(hSession);
    PortalRegistry_PortalRegistry_Open(hPortal, pszPortalName);
    if (PortalRegistry_PortalRegistry_Open(hPortal, pszPortalName) == false)
        _tprintf(_T("Open portal failed\n"));
    else
    {
        hRootFolder = PortalRegistry_PortalRegistry_GetRootFolder(hPortal);
        szStr = PortalRegistry_Folder_GetName(hRootFolder);
        _tprintf(_T("root folder name = %s\n"), szStr);
    }
}

/*****
* Function:      OutError
*
* Description:   Output error message from session psMessage object
*
* Returns:       None
*****/
void OutError(HPSAPI_SESSION hSession)
{
    LPTSTR          szStr;
    HPSAPI_PSMESSAGECOLLECTION hMsgColl;
    HPSAPI_PSMESSAGE hMsg;
    hMsgColl=(HPSAPI_PSMESSAGECOLLECTION) PeopleSoft_Session_GetPSMessages(hSession);

    wprintf(L"Get psMessage collection ok.\n");

    int i;

```

```
    PSI32 count;
    count=(PSI32) PeopleSoft_PSMessagesCollection_GetCount;
    wprintf(L"Count= %d\n", count);

    for (i=0; i<count; i++)
    {
        hMsg=(HPSAPI_PSMESSAGE) PeopleSoft_PSMessagesCollection_Item(hMsgColl,
i);
        szStr=PeopleSoft_PSMessages_GetText(hMsg);
        wprintf(L"\nMessage from session: %s\n",szStr);
    }
}
```

PostReport Class

PostReport Class Overview

The PostReport class provides properties and method for posting reports to the Report Repository. This class enables you to create reports outside of Process Scheduler and have them posted in the Report Repository.

The request to post reports creates an entry to the Report Manager table. The Distribution Agent polls the Report Manager table for any new requests and proceeds with any request it finds by transferring the files to the repository server. The report can then be accessed from the Report Manager after the Distribution Agent successfully processes the post request.

Related Topics

- Process Scheduler: Understanding Report Manager

Determining the Distribution List

Use the AddDistributionOption method to authorize users to view the report from the Report Manager. This function enables you to grant access to the report either specifying a User ID or Role. However, if no distribution list is specified in the request, the class queries the system for the distribution list as follows:

1. If the Process Instance is specified, the system checks for the distribution list in the Process Request table. The system assumes in this case that the request was scheduled through the Process Request Dialog, but was processed by a third-party scheduler.
2. If a Process Name and Process Type properties were specified, the system checks if a distribution list was predefined in the Process Definition table.
3. If no list was found using the above queries, the user who submitted the request has sole access to the report.

Data Type of a PostReport Object

A PostReport object is declared using the PostReport data type. For example:

```
Local PostReport &POSTRQST;
```

Scope of a PostReport Object

A PostReport object can only be instantiated from PeopleCode. However, if you need to access the Process Schedule Manager from outside of PeopleCode, like in a Visual Basic program, you can use the Process Schedule Manager API.

This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

Related Topics

- Process Scheduler: PeopleSoft Process Scheduler

PostReport Class Built-in Function

PeopleCode Language Reference: SetPostReport function

PostReport Class Methods

In this section, we discuss the PostReport class methods. The methods are discussed in alphabetical order.

AddDistributionOption method: PostReport class

Syntax

```
AddDistributionOption(DistIdType, DistID)
```

Description

Use the AddDistributionOption method to specify the users authorized to view the report once it is available in the Report Manager.

Parameters

Parameter	Description
<i>DistIdType</i>	Specify the distribution ID type as a string. This identifies if the value passed in the DistID is either a user or role. Values for this parameter are: • User • Role
<i>DistID</i>	Specify the distribution ID as a string.

Returns

Returns a number: 0 if successful, 1 if the system detected an error in the parameter passed.

Example

The following example grants access to the VP1 user and all users associated with the MANAGERS role.

```
&POSTRQST.AddDistributionOption("User", "QEDM0" );  
&POSTRQST.AddDistributionOption("Role", "MANAGERS");
```

Put method: PostReport class

Syntax

Put()

Description

The Put method inserts a request in the Report Manager table which runs according to the values in the properties of the PostReport object. In order to successfully schedule a process or job, certain properties are required.

Parameters

None.

Returns

None. If you want to verify that the method executed successfully, check the value of the Status property.

Example

```
&POSTRQST.Put();
&RPTINSTANCE = &POSTRQST.ReportId;
If (&RPTINSTANCE > 0) Then
    MessageBox(0, "", 63, 119, "Successfully processed request with Rpt. ID
%1⇒
    for Process %2 to post from directory %3", &RPTINSTANCE,
&POSTRQST.ProcessName,⇒
    &POSTRQST.SourceReportPath);
    Else
        MessageBox(0, "", 63, 122, "Not successful for process request for
Process⇒
    %1 to post from directory %2", &POSTRQST.ProcessName,
&POSTRQST.SourceReportPath);
End-If;
```

Related Topics

- PeopleCode Language Reference: SetPostReport function

PostReport Class Properties

In this section, we discuss the PostReport class properties. The properties are discussed in alphabetical order.

ExpirationDate property: PostReport class

Description

This property specifies the date the report will be deleted from the Report Manager table. If the expiration date is not specified, the system calculates the expiration date based on the Retention Days specified in the Process Scheduler's System Settings.

This property is read/write.

Example

```
&MYRQST.ExpirationDate = "2003/01/01";
```

Related Topics

- [Process Scheduler: Defining System Settings](#)

OutDestFormat property: PostReport class

Description

This property specifies the output format of the file that is posted to the Report Repository. If format is not specified, the system determines the format based on the extension of the file being posted to the Report Repository.

This property is read/write.

Example

```
&MYRQST.OutDestFormat = "PDF";
```

Related Topics

- [Values for Output Type and Format](#)
The values for output type and format are based on the generic process type assigned to a process type definition. The following table provides a cross-reference listing for all delivered process type definitions.

ProcessInstance property: PostReport class

Description

This property specifies the instance number assigned to request. This property is only required if the report was initially submitted through the Process Request Dialog, but was processed by a third-party scheduler.

This property is read/write.

Related Topics

- [Determining the Distribution List](#)
Use the AddDistributionOption method to authorize users to view the report from the Report Manager. This function enables you to grant access to the report either specifying a

User ID or Role. However, if no distribution list is specified in the request, the class queries the system for the distribution list as follows:

ProcessName property: PostReport class

Description

This property specifies the name of a predefined process as a string.

This property is read/write.

Example

```
&MYRQST.ProcessName = "XRFWIN";
```

Related Topics

- [ProcessType property: PostReport class](#)
- [RunControlID property: ProcessRequest class](#)

ProcessType property: PostReport class

Description

This property specifies the name of a predefined process type as a string.

This property is read/write.

Example

Note that spaces are included in the string for ProcessType.

```
&MYRQST.ProcessType = "Application Engine";
```

Related Topics

- [ProcessName property: PostReport class](#)
- [RunControlID property: ProcessRequest class](#)

ReportDescr property: PostReport class

Description

This property specifies the description as a string.

If the ReportDescr property is not specified, and both Process Name and Process Type are not null, the description is extracted from the Process Definition table.

This property is read/write.

Example

```
&MYRQST.ReportDescr = "Panel Cross Reference Report";
```

ReportFolder property: PostReport class

Description

This property specifies the name of the report folder as a string. If you specify a folder, the folder that you specify must have already been defined using Process Scheduler's Report Folders Administration.

This property is read/write.

Related Topics

- Process Scheduler: Understanding Report Folders

ReportId property: PostReport class

Description

This property is a system-generated identification number. The system assigns a ReportId after the Put method processed the request.

This property is read/write.

Example

```
&MYRQST.Put();
if &MYRQST.ReportId > 0 then
    MessageBox(0, "", 63, 119, "Sucessfully processed request with Rpt. ID
%1", =>
    &MYRQST.ReportId);
Else
    /* do error processing */
End-If;
```

ServerName property: PostReport class

Description

This property specifies the Process Scheduler Server name that posts the report. This property takes a string value.

This property is read/write.

Example

```
&MYRQST.ServerName = "PSNT";
```

Related Topics

- Process Scheduler: Defining System Settings

SourceReportPath property: PostReport class

Description

This property specifies the path that contains the source report. You need to specify an absolute path.

This property is read/write.

PostReport Class Examples

The following example posts files found in the directory 'c:\temp\SQRDIR' and can be accessed by VP1 and users in the MANAGERS role.

```
Local PostReport &RPTINFO;
Local number &RPTINSTANCE

/*****
* Construct a PostReport Object.
*****/
&RPTINFO = SetPostReport();

&RPTINFO.ProcessName = "GLS7009";
&RPTINFO.ProcessType = "SQR Report";
&RPTINFO.ReportFolder = "Financial";
&RPTINFO.SourceReportPath = "c:\temp\SQRDIR";
&RPTINFO.ExpirationDate = "2005/01/01";
&RPTINFO.ReportDescr = "Journal Posting Summary Report";
&RPTINFO.ServerName = "PSNT";

&RPTINFO.AddDistributionOption("USER", "VP1");
&RPTINFO.AddDistributionOption("ROLE", "MANAGERS");

&RPTINFO.Put();
&RPTINSTANCE = &RPTINFO.ReportId;

If (&RPTINSTANCE > 0) Then
    MessageBox(0, "", 63, 119, "Successfully processed request with Rpt. ID
%1⇒
    for Process %2 to post from directory %3", &RPTINSTANCE,
    &RPTINFO.ProcessName,⇒
    &RPTINFO.SourceReportPath);
Else
    MessageBox(0, "", 63, 122, "Not successful for process request for
Process⇒
    %1 to post from directory %2", &RPTINFO.ProcessName,
    &RPTINFO.SourceReportPath);
End-If;
```

Process Request Classes

Understanding Process Request Classes

The `ProcessRequest` class provides properties and a method for scheduling a pre-defined process or job. You must define the process or the job (using Process Scheduler Manager) *before* you can schedule it using the `ProcessRequest` class.

The properties of this class contain the same values as those required by Process Scheduler Manager for scheduling a process or job. Values you provide for these properties may override the equivalent values set in Process Scheduler Manager, depending on the override settings you make in PeopleSoft Process Scheduler pages.

Starting with PeopleSoft 8.4, PeopleSoft supports only the `ProcessRequest` class to schedule a process or a job in PeopleCode. The `ScheduleProcess` PeopleCode function is no longer supported. Any existing PeopleCode functions containing this desupported function must be modified to use the `ProcessRequest` class to schedule a request.

This topic assumes that the reader has working knowledge of PeopleSoft Process Scheduler.

Related Topics

- [ProcessRequest Class Examples](#)
The following section contains examples for scheduling processes and jobs using the `ProcessRequest` class.

Data Type of a ProcessRequest Object

A `ProcessRequest` object is declared using the `ProcessRequest` data type. For example:

```
Local ProcessRequest &RQST;
```

Scope of a ProcessRequest Object

A `ProcessRequest` object can be instantiated only from PeopleCode. However, if you need to access the Process Schedule Manager from outside of PeopleCode, for example, in a Visual Basic program, you can use the Process Schedule Manager API.

This object can be used anywhere you have PeopleCode, that is, in an application class, Component Interface PeopleCode, record field PeopleCode, and so on.

Options for Items In Jobs and Jobsets

A key feature of PeopleSoft Process Scheduler is the option to create a Job Definition consisting of other jobs. A job containing a job is called a *jobset*. Process Scheduler Server schedules the items within these jobs according to how the jobset is defined through the Process Scheduler Manager.


The ProcessRequest class requires the following properties to handle jobsets:

- JobName: indicates the name of the job that an item belongs to.
- PrcsItemLevel: indicates a job item's process item level within a jobset.
- JobSeqNo: indicates a job item's job sequence number within the Process Item Level.

The following is a simple example of a job containing only a single process:

This example illustrates the fields and controls on the Sample job with single process. You can find definitions for the fields and controls later on this page.


Job Name: 3SQR SQR Job

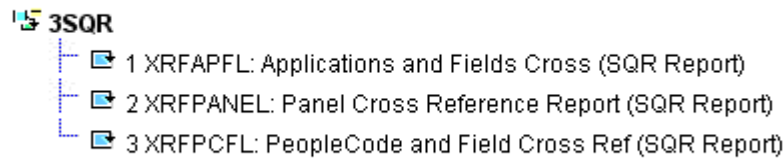

Process	PrcsItemLevel	JobName	JobSeqNo
3SQR	0		0
XRFAPFL	1	3SQR	1
XRFAPANEL	2	3SQR	2
XRFPCFL	3	3SQR	3

The following is an example of a jobset containing multiple jobs:

This example illustrates the fields and controls on the Sample jobset containing multiple jobs. You can find definitions for the fields and controls later on this page.

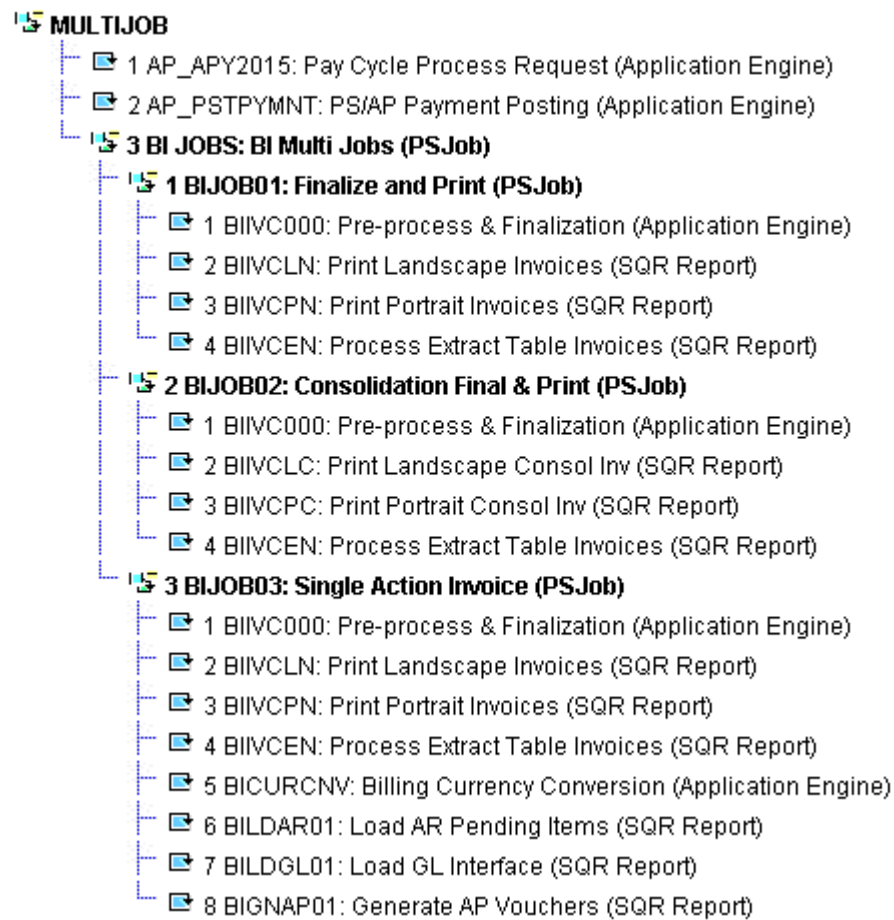Job Name: MULTIJOB Jobset Example

Process	PrcsItemLevel	JobName	JobSeqNo
MULTIJOB	0		0
AP_APY2015	1	MULTIJOB	1
AP_PSTPYMNT	1	MULTIJOB	2
BI JOBS	1	MULTIJOB	3
BIJOB01	2	BI JOBS	1
BIIVC000	3	BIJOB01	1
BIIVCLN	3	BIJOB01	2
BIIVCPN	3	BIJOB01	3
BIIVCEN	3	BIJOB01	4
BIJOB02	2	MULTIJOB	2
BIIVC000	3	BIJOB02	1
BIIVCLC	3	BIJOB02	2
BIIVCPC	3	BIJOB02	3
BIIVCEN	3	BIJOB02	4
BIJOB03	2	MULTIJOB	3
BIIVC000	3	BIJOB03	1

Process	PrcsItemLevel	JobName	JobSeqNo
BIIVCLN	3	BIJOB03	2
BIIVCPN	3	BIJOB03	3
BIIVCEN	3	BIJOB03	4
BICURCNV	3	BIJOB03	5
BILDAR01	3	BIJOB03	6
BILDGL01	3	BIJOB03	7
BIGNAP01	3	BIJOB03	8

All the class methods that are used to change options for items within a job or jobset, use these attributes as optional parameters.

If a method is used without specifying any of these parameters, the system assumes the changes apply to *all* items within a jobset.

If one or more of these attributes are specified, the method applies the changes to items matching the value of these attributes.

In the case where a JobName is specified, the changes apply to all items within the specified job.

Specific methods used to manipulate options within a job or jobset include:

- AddDistributionOption
- SetEmailOption
- SetItemFolder
- SetOutputOption

When manipulating the options within a job or jobset, you must specify the process type and process name in the CreateProcessRequest function when instantiating a ProcessRequest object. This is required as the class needs to retrieve the job item information from the job definition for a specific job or jobset. The class uses this information to alter items within the job or jobset based on subsequent method calls made prior to scheduling the request. If the process type and process name are not specified when instantiating the ProcessRequest object, all PeopleCode programs trying to use any of the methods return an error message:

The method can not be used because the ProcessRequest is not properly initialized

In the previous jobset example, the ProcessRequest must be instantiated as follows:

```
Local ProcessRequest &RQST;

&RQST = CreateProcessRequest("PSJob", "MULTIJOB");
```

The following code examples use the previous example MULTIJOB, and show how items can be altered within a job or jobset:

- Change all items in the Jobset to “Web” with reports generated in PDF format:

```
&RQST.SetOutputOption("Web", "PDF", "", "MULTIJOB");
```

Alternatively, this can also be coded as follows:

```
&RQST.SetOutputOption("Web", "PDF", "");
```

- Change the output option for job BIJOB02 to “Email” with reports generated in HTM format:

```
&RQST.SetOutputOption("Email", "HTM", "", "BIJOB02");
```

- Change the output option for BIIVCPN in job BIJOB01 to “File” in LP (LinePrinter) format:

```
&RQST.SetOutputOption("File", "LP", "BIJOB01", 3, 3);
```

- Change all items in level three to “Web” in PS (PostScript) format:

```
&RQST.SetOutputOption("Web", "PS", "", "", 3);
```

Values for Output Type and Format

The values for output type and format are based on the generic process type assigned to a process type definition. The following table provides a cross-reference listing for all delivered process type definitions.

Generic Process Type	Process Type
AppEngine	Application Engine, Optimization Engine
COBOL	COBOL SQL
Cube	CubeBuilder, HyperCube Builder
SQR	SQR Process, SQR Report
Winword	Winword
nVision	nVision, nVision-Report, nVision-ReportBook
Data Mover	Data Mover
Other	Essbase

The following table lists all the values for OutDestType delivered with PeopleTools.

However, the values and defaults can be customized through Process Scheduler Manager. Please refer to the PeopleSoft Process Scheduler documentation for additional information on how to accurately determine the values for your system.

Generic ProcessType	Valid OutDestTypes	Defaults
AppEngine	FILE, WEB, WINDOW	WEB
COBOL	NONE, WINDOW, WEB	NONE
Cube	NONE	NONE
nVision	WEB, WINDOW, EMAIL, FILE, PRINTER, DEFAULT	DEFAULT
SQR	WEB, WINDOW, EMAIL, FILE, PRINTER	WEB
WinWord	WINDOW, WEB	WEB
Data Mover	WEB, WINDOW, FILE	WEB

Generic ProcessType	Valid OutDestTypes	Defaults
OTHER	WEB, WINDOW, EMAIL, FILE, PRINTER, NONE	NONE

Similar to the OutDestType, the formats and defaults for a generic process type can be customized through Process Scheduler Manager. The following table lists the values and defaults as delivered.

Generic ProcessType	OutDestType	Valid OutDestFormats	Default
AppEngine	WINDOW	PDF, XLS, TXT, HTM	TXT
AppEngine	FILE	PDF, XLS, TXT, HTM	TXT
AppEngine	WEB	PDF, XLS, TXT, HTM	TXT
COBOL	NONE	NONE	NONE
COBOL	WEB	TXT	TXT
COBOL	WINDOW	TXT	TXT
Cube	NONE	NONE	NONE
Data Mover	FILE	TXT	TXT
Data Mover	WINDOW	TXT	TXT
Data Mover	WEB	TXT	TXT
nVision	EMAIL	HTM, XLS	XLS
nVision	FILE	HTM, XLS	XLS
nVision	PRINTER	HTM, XLS	XLS
nVision	WINDOW	HTM, XLS	XLS
nVision	WEB	HTM, XLS	XLS
nVision	DEFAULT	DEFAULT	DEFAULT
SQR	EMAIL	CSV, HP, HTM, LP, PDF, PS, SPF, OTHER	PDF
SQR	FILE	CSV, HP, HTM, LP, PDF, PS, SPF, OTHER	PDF
SQR	PRINTER	HP, LP, PS, WP	PS
SQR	WEB	CSV, HP, HTM, LP, PDF, PS, SPF, OTHER	WEB
SQR	WINDOW	CSV, HP, HTM, LP, PDF, PS, SPF, OTHER	WEB
WinWord	NONE	NONE	NONE
WinWord	WEB	DOC	DOC
WinWord	WINDOW	DOC	DOC
OTHER	NONE	NONE	NONE

Alternative Options to Specify Email or Web Attributes

To set the email or web attributes in PeopleTools versions prior to release 8.4, your PeopleCode program was similar to the following:

To Set Attributes for Web (Prior to 8.4)

The following example shows how to set web attributes in PeopleTools versions prior to release 8.4:

```
&RQST.OutDestType = "Web";  
&RQST.OutDestFormat = "PDF";  
&RQST.OutDest = "User : VP1,Role :Managers";
```

Set Attributes for Email (Prior to 8.4)

The following example shows how to set email attributes in PeopleTools versions prior to release 8.4:

```
Local string &Subject ;  
Local string &Text;  
  
&Subject = "SQR Report: Cross Reference Listing";  
&Text = "This text will be displayed as the text of this email ";  
&RQST.OutDestType = "Email";  
&RQST.OutDestFormat = "PDF";  
&RQST.OutDest = "User : VP1,Role : MANAGERS";  
&RQST.EmailSubject = &Subject;  
&RQST.EmailText = &Text;  
&RQST.EmailAttachLog = False;
```

Set Attribute for Web (8.4 and Later)

The following example shows how to set web attributes in PeopleTools versions release 8.4 and later:

```
&RQST.SetOutputOption("Web", "PDF", "");  
&RQST.AddDistributionOption("User", "QEDMO");  
&RQST.AddDistributionOption("Role", "MANAGERS");
```

Set Attribute for Email (8.4 and Later)

The following example shows how to set web attributes in PeopleTools versions release 8.4 and later:

```
Local string &Subject ;  
Local string &Text;  
  
&Subject = "SQR Report: Cross Reference Listing";  
&Text = "This text will be displayed as the text of this email ";  
&RQST.SetOutputOption("Email", "PDF", "");  
&RQST.SetEmailOption(&Subject, &Text, "abc@xyz.com", "False", "False");
```



```
&RQST.AddDistributionOption("User", "QEDM0");  
&RQST.AddDistributionOption("Role", "MANAGERS");
```

File Dependant Processing

You can define a process to be file dependent, which means associating a file with a process that gets scheduled once the system detects the presence of the file.

You can use the `PrCsApi` class methods for detecting files associated with a process, as well as for displaying additional messages about the process as it's running.

The `PrCsApi` class is an Application Package class that you must import into your PeopleCode in order to use its methods.

For example, you could use the `PrCsApi` class with a Application Engine program. In the Application Engine process `PROCESS_ED1`, you could create a file dependency (using the `FileName ProcessRequest` property) and make the process dependent on the file `/vendor/edi*.data`.

On 10/23, the system detects the file `/vendor/edi_1023.data` and schedules the process `PROCESS_ED1`. In the Application Engine program, you can refer to the file that started the process using the `getAllFileNames` `PrCsApi` class method.

On 10/24, the system detects the file `/vendor/edi_1024.data` and schedules the process `PROCESS_ED1`. The process is started from a different file, and can access that file, so duplicate processing doesn't occur.

Related Topics

- [PrCsApi Class](#)

Use the `PrCsApi` class with file dependant processing. This section includes:

ProcessRequest Class Built-in Functions

PeopleCode Language Reference: `CreateProcessRequest` function

PeopleCode Language Reference: `GetNextProcessInstance` function

PeopleCode Language Reference: `SetupScheduleDefnItem` function

ProcessRequest Class Methods

In this section, we discuss the `ProcessRequest` class methods. The methods are discussed in alphabetical order.

AddDistributionOption method: ProcessRequest class

Syntax

```
AddDistributionOption(DistIdType, DistId [, JobName] [, PrCsItemLevel] [, JobSeqNo] [, ItemJobSeq])
```

Description

Use the AddDistributionOption method to set the distribution options for any job item in the main job. Distribution options enable you to distribute output in different formats (HTML, PDF, Excel, and so on) to other users based on their user ID or role ID.

This function is valid only if the output destination for the request is routed either to Web or Email.

Parameters

Parameter	Description
<i>DistIdType</i>	Specify the distribution ID type as a string. This identifies if the value passed in the DistID is either a user or role. Values for this parameter are: • User • Role
<i>DistID</i>	Specify the distribution ID as a string.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.
<i>ItemJobSeq</i>	Specify the job item's sequence within its parent job as a number

Returns

Returns a number: 0 if successful, 1 if system detected an error in the parameter passed.

Example

The following example grants access to the QEDMO user all reports in MULTIJOB from the Web, while users with role of MANAGERS have access to reports created in the BIJOB03 job.

```
&RQST.SetOutputOption("Web", "PDF", "");  
&RQST.AddDistributionOption("User", "QEDMO", "MULTIJOB" );  
&RQST.AddDistributionOption("Role", "MANAGERS", "BIJOB03");
```

Related Topics

- [SetEmailOption method: ProcessRequest class](#)
- [SetOutputOption method: ProcessRequest class](#)

AddNotifyInfo method: ProcessRequest class

Syntax

```
AddNotifyInfo(field_name, field_value [, JobName] [, PrclsItemLevel] [, JobSeqNo])
```

Description

Use the AddNotifyInfo method to specify name-value pair data to be included in the process status notification message.

Parameters

Parameter	Description
<i>field_name</i>	Specify the field name data as a string.
<i>field_value</i>	Specify the field value data as a string.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.

Returns

None.

Example

```
&RQST.AddNotifyInfo("AEMINITEST Name", "Status");  
&RQST.AddNotifyInfo("AEMINITEST Descr", "Status Notify");  
&RQST.AddNotifyInfo("AEMINITEST OutType", "EMAIL");
```

Related Topics

- [SetNotifyAppMethod method: ProcessRequest class](#)
- [SetNotifyService method: ProcessRequest class](#)

PrintJobHTMLRpt method: ProcessRequest class

Syntax

```
PrintJobHTMLRpt()
```

Description

Use the PrintJobHTMLRpt method to generate an HTML report file displaying all items in a job or jobset in a tree as defined in the Job Definition component.

Parameters

None.

Returns

An HTML report as a string

Example

The following code:

```

Local ProcessRequest &JobRQST;
Local string &sHTML;


&JobRQST = CreateProcessRequest("PSJob", "SQRXRF");
&sHTML = &JobRQST.PrintJobHTMLRpt();

```

generates the following HTML file:

The following image is an example of an HTML file generated after executing the above mentioned PeopleCode program:

Job Name: SQRXRF All SQR Xref Reports

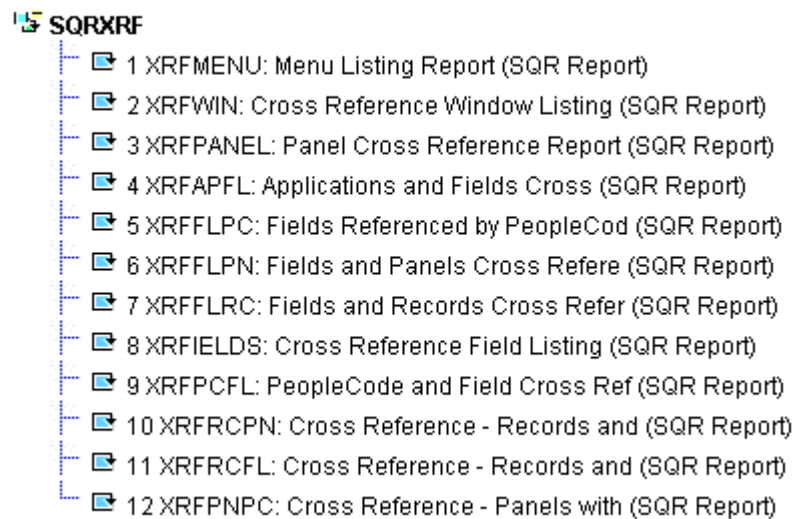

Related Topics

- [PrintJobRqstRpt method: ProcessRequest class](#)
- [PrintSchdlHTMLRpt method: ProcessRequest class](#)

PrintJobRqstRpt method: ProcessRequest class

Syntax

```

PrintJobRqstRpt(ProcessInstance, ItemInstance [, PrintJobTree] [,
PrintDistList] [, PrintNotifyList] [, PrintSystemMessage] [,
PrintApplicationMessage] [, PrintParamList])

```

Description

Use the PrintJobRqstRpt method to generate an HTML report file displaying the current status of a specific process, job, or jobset.

Parameters

Parameter	Description
<i>ProcessInstance</i>	Specify the ProcessInstance number assigned to the process, job, or jobset
<i>ItemInstance</i>	Specify either to display all items in a job or jobset, or just a specific item. - To display all items, specify 0. - To display a specific item, specify the ProcessInstance number assigned to that item. For a process, set this parameter to 0.
<i>PrintJobTree</i>	Specify whether to have the job tree displayed in the HTML report. This parameter takes a string value: "1" to display the tree. "0" to not display the tree. Default value is "1".
<i>PrintDistList</i>	Specify whether you want the list of Users and Roles who will be the recipient of a report generated for a job item displayed in the HTML report. This parameter takes a string value: "1" to display the list. "0" to not display the list. Default value is "0".
<i>PrintSystemMessage</i>	Specify whether you want to have the message specified from the Process Definition or Job Definition page displayed in the HTML report. This parameter takes a string value: "1" to display the system message. "0" to not display the system message. Default value is "0".
<i>PrintApplicationMessage</i>	Specify whether you want the application messages displayed in the HTML report. These are the application messages that can be viewed from the Message Log subpage of the Process Monitor Detail page. This parameter takes a string value: "1" to display application messages. "0" to not display application messages. Default value is "0".
<i>PrintParamList</i>	Specify whether you want the parameter list for a job item displayed in the HTML report. This parameter takes a string value: "1" to display the parameter list. "0" to not display the parameter list. Default value is "0".

Returns

An HTML report as a string.

Example

The following PeopleCode program:

```
Local ProcessRequest &JobRQST;  
Local string &sHTML;  
Local string &sPRINT_JOBTREE;  
Local string &sPRINT_DISTLIST;  
Local string &sPRINT_SYSMESSAGE;  
Local string &sPRINT_APPLMESSAGE;  
Local string &sPRINT_PARAMLIST;  
  
&sPRINT_JOBTREE = "0";  
&sPRINT_DISTLIST = "1";  
&sPRINT_SYSMESSAGE = "1";  
&sPRINT_APPLMESSAGE = "1";  
&sPRINT_PARAMLIST = "1";  
&JobRQST = CreateProcessRequest();  
&sHTML = &JobRQST.PrintJobRqstRpt(PMN_PRCSLIST.PRCINSTANCE, 0,  
&sPRINT_JOBTREE,⇒  
    &sPRINT_DISTLIST, &sPRINT_SYSMESSAGE, &sPRINT_APPLMESSAGE,  
&sPRINT_PARAMLIST);
```

The following screen image is an example of a HTML report created after executing the above mentioned PeopleCode program:

Job Name: 3MIX - Mix Jobs															
Mode: Parallel															
Seq.	Instance	Process Name	Description	Process Type	Run Status	Run Control ID	Type	Output Format	Server Name	Begin Date/Time	End Date/Time				
1	4200	XRFWIN	Cross Reference Window Listing	SQR Report	Error	TEST	Web	Acrobat (*.pdf)	PSNT2		2002 - 01 - 08 - 04.01.33.687000				
System Message: Contact John Smith at (555)999-1234 to review the errors Parameter: C:\pt840ic3\BIN\SERVER\WIN\X86\VPSSQR.EXE -CT MICROSOFT -CS -CD F8840IC2 -CA ACCESSID -CAP ACCESSPSWD -RP XRFWIN -I 4200 -R TEST -CO VP1 -OT 6 -OP C:\pt840ic3\APP\SERVER\prcs\F8840IC2\log_output\SQR_XRFWIN_4200 -OF 2 Distribution List:<table><tr><th>Type</th><th>Name</th></tr><tr><td>User</td><td>VP1</td></tr></table> Application Messages: Process Request shows status of 'INITIATED' or 'PROCESSING' but no longer running (65,70)												Type	Name	User	VP1
Type	Name														
User	VP1														
2	4201	AEMINITEST	Simple AE test program	Application Engine	Success	TEST	Web	Text Files (*.txt)	PSNT2	2002 - 01 - 08 -					

Related Topics

- [PrintJobHTMLRpt method: ProcessRequest class](#)
- [PrintSchdlHTMLRpt method: ProcessRequest class](#)

PrintSchdlHTMLRpt method: ProcessRequest class

Syntax

```
PrintSchdlHTMLRpt([PrintJobTree] [, PrintDistList] [, PrintNotifyList] [, PrintMessageList] [, PrintParamList])
```

Description

Use the PrintSchdlHTMLRpt method to generate an HTML report file displaying all items in a job or jobset as defined in the Scheduled Jobset Definition component.

Parameters

Parameter	Description
<i>PrintJobTree</i>	Specify whether to have the job tree displayed in the HTML report. This parameter takes a string value: • "1" to display the tree. • "0" to not display the tree. Default value is "1".
<i>PrintDistList</i>	Specify whether you want the list of Users and Roles who will be the recipient of a report generated for a job item displayed in the HTML report. This parameter takes a string value: • "1" to display the list. • "0" to not display the list. Default value is "0".
<i>PrintNotifyList</i>	Specify whether you want the list of Users and Roles who will be notified for the status of a job item displayed in the HTML report. This parameter takes a string value: • "1" to display the list. • "0" to not display the list. Default value is "0".
<i>PrintMessageList</i>	Specify whether you want the messages that will be sent as email upon completion of a job item displayed in the HTML report. This parameter takes a string value: • "1" to display messages. • "0" to not display messages. Default value is "0".
<i>PrintParamList</i>	Specify whether you want the parameter list for a job item displayed in the HTML report. This parameter takes a string value: • "1" to display the parameter list. • "0" to display the parameter list. Default value is "0".

Returns

An HTML report as a string

Example

The following code:

```
Local string &sHTML;  
Local string &sPRINT_JOBTREE;  
Local string &sPRINT_DISTLIST;  
Local string &sPRINT_NOTIFYLIST;  
Local string &sPRINT_MESSAGELIST;  
Local string &sPRINT_PARAMLIST;  
  
&sPRINT_JOBTREE = "1";
```



```

&sPRINT_DISTLIST = "0";
&sPRINT_NOTIFYLIST = "0";
&sPRINT_MESSAGELIST = "0";
&sPRINT_PARAMLIST = "0";
&JobRQST = SetupScheduleDefnItem("Sample", "MULTIJOB");
&sHTML = &JobRQST.PrintSchdlHTMLRpt(&sPRINT_JOBTREE, &sPRINT_DISTLIST,
&sPRINT_
NOTIFYLIST, &sPRINT_MESSAGELIST, &sPRINT_PARAMLIST);

```

Creates the following HTML report:

The following screen image is an example of a HTML report created after executing the above mentioned PeopleCode program:

Job Name: MULTIJOB - Jobset Example									
Mode: Serial									
Seq.	Process Name	Description	Process Type	Run Control ID	Type	Output Format	Destination	Server Option	Run Time
1	AP_APY2015	Pay Cycle Process Request	Application Engine	RunCntlTest	Web	Text Files (*.txt)	Distribution List	Any Server	
2	AP_PSTPYMNT	PS/AP Payment Posting	Application Engine	RunCntlTest	Web	Text Files (*.txt)	Distribution List	Any Server	
3	BI JOBS	BI Multi Jobs	PSJob	RunCntlTest	(None)	(None)		Any Server	

Job Name: BI JOBS - BI Multi Jobs									
Mode: Serial									
Parent Job Name: MULTIJOB									
Seq.	Process Name	Description	Process Type	Run Control ID	Type	Output Format	Destination	Server Option	Run Time
1	BIJOB01	Finalize and Print	PSJob	RunCntlTest	(None)	(None)		Any Server	
2	BIJOB02	Consolidation Final & Print	PSJob	RunCntlTest	(None)	(None)		Any Server	
3	BIJOB03	Single Action Invoice	PSJob	RunCntlTest	(None)	(None)		Any Server	

Related Topics

- [PrintJobHTMLRpt method: ProcessRequest class](#)
- [PrintJobRqstRpt method: ProcessRequest class](#)

RunJobSetNow method: ProcessRequest class

Syntax

```
RunJobSetNow( )
```

Description

Use the RunJobSetNow method to schedule a jobset based on settings defined in the Scheduled Jobset Definition component.

Parameters

None.

Returns

None. To verify that the method executed successfully, check the value of the Status property.

Example

```
/* Create the ProcessRequest Object & Run the Scheduled JobSet Now */  
Local ProcessRequest &JobRQST;  
Local integer &instanceList;  
  
&JobRQST = SetupScheduleDefnItem("Sample", "MULTIJOB");  
&JobRQST.RunJobSetNow();  
&instanceList = &JobRQST.ProcessInstance;
```

Related Topics

- [Status property: ProcessRequest class](#)

Schedule method: ProcessRequest class

Syntax

```
Schedule( )
```

Description

Use the Schedule method to insert a request in the Process Request table which runs according to the values in the properties of the ProcessRequest object. To successfully schedule a process or job, certain properties are required.

- If you're scheduling a single process, you must assign values to the following properties:
 - RunControlID
 - ProcessName
 - ProcessType
- If you're scheduling a job where job item changes are not made, you must assign values to the following properties:

- RunControlID
- JobName
- If you're scheduling a job where job item changes are made, you must assign values to the RunControlID.

Note

You don't have to assign the JobName in this instance because it's set with the CreateProcessRequest function.

Parameters

None.

Returns

None. To verify that the method executed successfully, check the value of the Status property.

Example

```
&MYRQST.Schedule();  
If &MYRQST.Status = 0 then  
    /* Schedule succeeded. */  
Else  
    /* Process (job) not scheduled, do error processing */  
End-If;
```

Related Topics

- [RunControlID property: ProcessRequest class](#)
- [JobName property: ProcessRequest class](#)
- [ProcessName property: ProcessRequest class](#)
- [ProcessType property: ProcessRequest class](#)
- [Status property: ProcessRequest class](#)
- PeopleCode Language Reference: CreateProcessRequest function

SetEmailOption method: ProcessRequest class

Syntax

```
SetEmailOption(EmailSubject, EmailText, EmailAddress, EmailWebReport,  
EmailAttachLog [, JobName] [, PrclsItemLevel] [, JobSeqNo] [, ItemJobSeq])
```

Description

Use the SetEmailOption method to set the email options for all job items in the main job.

Parameters

Parameter	Description
<i>EmailSubject</i>	Specify the text used in the subject of the email sent at completion of this job email subject as a string. You can specify a Null ("") for this parameter.
<i>EmailText</i>	Specify the email text sent at completion of this job as a string. You can specify a Null ("") for this parameter.
<i>EmailAddress</i>	Specify the email address of the person you want an email sent to at the completion of this job. To send more than one email address, separate the addresses with a semicolon.
<i>EmailWebReport</i>	Specify whether to attach the web report to the email sent at the completion of this job. This parameter takes a string value: "True", attach the web report, "False", don't attach the web report. This parameter can be set only to "True" when the OutDestType property for the request is "Web".
<i>EmailAttachLog</i>	Specify whether to attach the log file to the email sent at the completion of this job. This parameter takes a string value: "True", attach the log file, "False", don't attach the log file.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrcsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.
<i>ItemJobSeq</i>	Specify the job item's sequence within its parent job as a number

Returns

None.

Related Topics

- [SetItemFolder method: ProcessRequest class](#)
- [SetOutputOption method: ProcessRequest class](#)
- [AddDistributionOption method: ProcessRequest class](#)

SetItemFolder method: ProcessRequest class

Syntax

```
SetItemFolder(PortalFolder [, JobName] [, PrcsItemLevel] [, JobSeqNo] [, ItemJobSeq])
```

Description

Use the SetItemFolder method to associate a report folder with any job items jobset.

The folder that you specify must have already been created using the System Settings component in Process Scheduler Manager.

Parameters

Parameter	Description
<i>PortalFolder</i>	Specify the name of the report folder to use for the job item as a string. The folder that you specify must have already been created using Report Manager.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.
<i>ItemJobSeq</i>	Specify the job item's sequence within its parent job as a number

Returns

None.

Example

```
&RQST.SetItemFolder("GENERAL", "MULTIJOB", 1, 2);
```

Related Topics

- [AddDistributionOption method: ProcessRequest class](#)

SetNotifyAppMethod method: ProcessRequest class

Syntax

```
SetNotifyAppMethod(app_class_name, app_class_method [, JobName] [, PrclsItemLevel] [, JobSeqNo])
```

Description

Use the SetNotifyAppMethod method to invoke your own custom application class and method to handle process status notification and the information you want to send. This method triggers the delivered PRCS_STATUS_OPER service operation, which invokes the custom method.

! Important

The constructor for the application class cannot require parameters.

i Note

Alternatively, you can create a custom service operation and trigger that service operation using the `SetNotifyService` method. Your PeopleCode program should call only one of these methods: either `SetNotifyAppMethod` or `SetNotifyService`. If both methods are used, the last method called takes precedence over the former.

Parameters

Parameter	Description
<i>app_class_name</i>	Specify the fully qualified application class name to be invoked on the target system as a string.
<i>app_class_method</i>	Specify the name of the method to be invoked on the target system as a string.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.

Returns

None.

Example

The following example contains two programs. The first program generates the process request setting process status notification through the `SetNotifyAppMethod` method. The second program defines the application class and method that does additional processing after the status notification has been received by the subscribing system.

Setting process status notification:

```

/*****
 * Construct a ProcessRequest Object. *
 *****/
&RQST = CreateProcessRequest();
&RQST.ProcessType = "Application Engine";
&RQST.Processname = "AEMINITEST";
&RQST.RunControlID = "AEMINI";
&RQST.OutDestType = "WEB";
&RQST.OutDestFormat = "PDF";
&RQST.NotifyTextMsgSet = 65;
&RQST.NotifyTextMsgNum = 237;
&RQST.RunDateTime = %Datetime;

```

```

&RQST.TimeZone = %ServerTimeZone;
&RQST.SetNotifyAppMethod("RECEIVE_NOTIFICATION:ProcessNotification", ⇒
"ReceiveNotification");
&RQST.AddNotifyInfo("AEMINITEST Name", "Status");
&RQST.AddNotifyInfo("AEMINITEST Descr", "Status Notify");
&RQST.AddNotifyInfo("AEMINITEST OutType", "EMAIL");
&RQST.Schedule();
&PRCSSTATUS = &RQST.Status;
&PRCSINSTANCE = &RQST.ProcessInstance;
If &PRCSSTATUS = 0 Then
    MessageBox(%MsgStyle_OK, "", 65, 366, "Process Instance", ⇒
"AEMINITEST", &PRCSINSTANCE);
Else
    MessageBox(%MsgStyle_OK, "", 65, 0, "Process Instance", ⇒
"Process Not submitted");
End-If;

```

Application class and method definition:

```

class ProcessNotification
    method ProcessNotification();
    method ReceiveNotification(&_MSG As Message);
end-class;

/* Class constructor can have no parameters */
method ProcessNotification
end-method;

method ReceiveNotification
    /*+ &_MSG as Message +/
    Local Rowset &rs_msg, &NotifyInfo;
    Local Message &message;
    Local string &sName, &sValue, &sName2, &sValue2;
    &rs_msg = &_MSG.GetRowset();
    /******
    /* Add logic you want to execute upon receiving notification */
    /* For example : */
    /* &RQST.SetNotifyAppMethod("RECEIVE_NOTIFICATION: */
    /* ProcessNotification", "ReceiveNotification"); */
    /* &RQST.AddNotifyInfo("SQR Report", "XRFMENU"); */
    If &rs_msg(1).PRCS_STATUS.RUNSTATUS.Value = "9" Then
        /* process ran to success */

        &NotifyInfo = &rs_msg.GetRow(1).GetRowset(Scroll.PRCSNOTIFYATTR);
        /* if you have more name-value pairs */
        /* add code to traverse the rows from the PRCSNOTIFYATTR rowset*/
        /* e.g. Get the first name-value pair */
        &sName = &NotifyInfo(1).PRCSNOTIFYATTR.PRCS_ATTRIBUT_NAME.Value;
        &sValue = &NotifyInfo(1).PRCSNOTIFYATTR.PRCS_ATTRIBUT_VALU.Value;
        /* e.g. submit a process request */
        Local number &PrCsInstance;
        Local ProcessRequest &RQST;
        &RQST = CreateProcessRequest();
        &RQST.ProcessType = &sName;

```

```

        &RQST.ProcessName = &sValue;
        &RQST.RunControlID = "test";
        &RQST.RunLocation = "PSNT";
        &RQST.OutDestType = "WEB";
        &RQST.OutDestFormat = "PDF";
        &RQST.RunDateTime = %Datetime;
        &RQST.TimeZone = %ServerTimeZone;
        &RQST.Schedule();

    Else
        /* other processing */
    End-If;
    /***** */
end-method

```

Related Topics

- [AddNotifyInfo method: ProcessRequest class](#)
- [SetNotifyService method: ProcessRequest class](#)
- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.
- Process Scheduler: Using Process Status Notifications

SetNotifyService method: ProcessRequest class

Syntax

```
SetNotifyService(srvc_op_name[, JobName] [, PrcsItemLevel] [, JobSeqNo])
```

Description

Use the SetNotifyService method to invoke your own custom service operation to handle process status notification and the information you want to send. Your custom service operation must use the PRCS_STATUS_MSG message definition.

Note

Alternatively, you can create a custom application class and method and invoke that method using the SetNotifyAppMethod method. Your PeopleCode program should call only one of these methods: either SetNotifyAppMethod or SetNotifyService. If both methods are used, the last method called takes precedence over the former.

Parameters

Parameter	Description
<i>srvc_op_name</i>	Specify the name of the custom service operation as a string.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.

Returns

None.

Example

```

/*****
 * Construct a ProcessRequest Object. *
 *****/
&RQST = CreateProcessRequest();
&RQST.ProcessType = "Application Engine";
&RQST.Processname = "AEMINITEST";
&RQST.RunControlID = "AEMINI";
&RQST.OutDestType = "WEB";
&RQST.OutDestFormat = "PDF";
&RQST.NotifyTextMsgSet = 65;
&RQST.NotifyTextMsgNum = 237;
&RQST.RunDateTime = %Datetime;
&RQST.TimeZone = %ServerTimeZone;
&RQST.SetNotifyService("PRCS_STATUS_OPER_TEST");
&RQST.AddNotifyInfo("AEMINITEST Name", "Status");
&RQST.AddNotifyInfo("AEMINITEST Descr", "Status Notify");
&RQST.AddNotifyInfo("AEMINITEST OutType", "EMAIL");
&RQST.Schedule();
&PRCSSTATUS = &RQST.Status;
&PRCSINSTANCE = &RQST.ProcessInstance;
If &PRCSSTATUS = 0 Then
    MessageBox(%MsgStyle_OK, "", 65, 366, "Process Instance", ⇒
    "AEMINITEST", &PRCSINSTANCE);
Else
    MessageBox(%MsgStyle_OK, "", 65, 0, "Process Instance", ⇒
    "Process Not submitted");
End-If;

```

Related Topics

- [AddNotifyInfo method: ProcessRequest class](#)
- [SetNotifyAppMethod method: ProcessRequest class](#)
- Integration Broker: Implementing Handlers Using Application Classes
- Integration Broker: Adding Service Operation Definitions

- Process Scheduler: Using Process Status Notifications

SetOutputOption method: ProcessRequest class

Syntax

```
SetOutputOption(OutputType, OutputFormat, OutputDest [, JobName] [,  
PrclsItemLevel] [, JobSeqNo] [, ItemJobSeq])
```

Description

Use the SetOutputOption method to modify the output option of one or more job items in the main job.

Note

This method can also be used for a single process.

The job sequence number and job level are optional. They are required only when the same process name is referenced more than once in a job and the user intends to modify the output option of only one item.

If the ProcessRequest object contains an invalid output type for a process, you won't be able to successfully schedule a process or job.

The values for *OutputType*, *OutDestFormat*, and *OutputDestination* are dependent upon each other as well as on other values.

See [Values for Output Type and Format](#).

Parameters

Parameter	Description
<i>OutputType</i>	Specify the output type as a string.
<i>OutputFormat</i>	Specify the output format as a string.
<i>OutputDestination</i>	Specify the output destination as a string.
<i>JobName</i>	Specify the name of the job that this item belongs to as a string.
<i>PrclsItemLevel</i>	Specify the job item's process item level within the main job as a number.
<i>JobSeqNo</i>	Specify the job item's job sequence number within the process item level as a number.
<i>ItemJobSeq</i>	Specify the job item's sequence within its parent job as a number

Returns

None.

Example

```
&RQST.SetOutputOption("Email", "HTM", "", "MULTIJOB", 1, 2);
```

Related Topics

- [OutDest property: ProcessRequest class](#)
- [OutDestFormat property: ProcessRequest class](#)
- [OutDestType property: ProcessRequest class](#)

UpdateRunStatus method: ProcessRequest class

Syntax

```
UpdateRunStatus()
```

Description

Use the UpdateRunStatus method to change the RunStatus for a specific process, job, or jobset.

Parameters

None.

Returns

None.

Example

```
Local ProcessRequest &RQST;  
  
&RQST = CreateProcessRequest();  
&RQST.ProcessInstance = 5;  
&RQST.RunStatus = 1; /* Cancel the request */  
&RQST.UpdateRunSttus();
```

Related Topics

- [RunStatus property: ProcessRequest class](#)

ProcessRequest Class Properties

In this section, we discuss the ProcessRequest class properties. The properties are discussed in alphabetical order.

EmailAttachLog property: ProcessRequest class

Description

This property specifies whether or not a log file is attached to the email sent at completion of this job (or process). This property takes a Boolean value.

This property is read/write.

Example

```
&RQST.EmailAttachLog = False;    /* Do not attach Log File */
```

EmailSubject property: ProcessRequest class

Description

This property specifies the text used in the subject of the email sent at completion of this job (or process). This property takes a string value.

This property is read/write.

Example

```
&RQST.EmailSubject = "SQR Report: Cross Reference Listing";
```

EmailText property: ProcessRequest class

Description

This property specifies the text of the email sent at the completion of this job (or process). This property takes a string value.

This property is read/write.

Example

```
&RQST.EmailText = "This text will be displayed as the text of this email ";
```

You can also use the text from a message in the message catalog for this property.

```
&RQST.EmailText = MsgGetText(65, 117, "Sample text for email with two  
parameters", ⇒  
    &MessageParm1, &MessageParm2);
```

EmailWebReport property: ProcessRequest class

Description

This property specifies whether an email is sent to recipients of the report after it is posted to the report repository. The URL for the report is included in the email. This option is applicable

only when the OutDesType for the request is Web. This property takes a Boolean value: True, the web report should be attached, False otherwise.

This property is read/write.

FileName property: ProcessRequest class

Description

This property contains the name of a file to be used with file dependant processing, that is, processes which are initiated only after a file becomes available.

For a file dependent process, the FileName property is set to override the file name specified in the process definition. You must specify the complete file path and extension for the file, as a string.

This property works with the RunLocation property. If you don't specify a run location, any value assigned to this property is ignored.

This property is read/write.

Example

The following code example initiates QE_AETESTPRG once the c:\import\ediData.dat file becomes available on PSNT server.

```
Local ProcessRequest &rqst1;

&rqst1 = CreateProcessRequest();
&rqst1.RunControlId = "2";
&rqst1.ProcessType = "Application Engine";
&rqst1.ProcessName = "QE_AETESTPRG";
&rqst1.RunLocation = "PSNT";
&rqst1.FileName="c:\import\ediData.dat";
&rqst1.Schedule();
```

Related Topics

- [RunLocation property: ProcessRequest class](#)
- Process Scheduler: Setting Process Definition Options

JobName property: ProcessRequest class

Description

This property contains the name of a job that you've defined in PeopleSoft Process Scheduler.

To schedule a job, you must assign values to JobName and RunControlID for the Schedule method to succeed.

If you're scheduling a job, you don't need to set the ProcessType property.

This property is read/write.

Example

```
&MYRQST.JobName = "3SQR";
```

Related Topics

- [RunControlID property: ProcessRequest class](#)

LanguageCd property: ProcessRequest class

Description

This property enables you to specify a language code for the process or job. If you don't specify a language code, PeopleSoft Process Scheduler first looks in the process run control table to retrieve a language code. If there isn't a value there, PeopleSoft Process Scheduler uses the user's language code specified in the User Definition table.

This property takes a string value.

This property is read/write.

Example

```
&MYRQST.LanguageCd = "ESP" /* Spanish */
```

NotifyTextMsgNum property: ProcessRequest class

Description

Use the NotifyTextMsgNum property to specify the message that should be displayed to the end user in the Event Notification popup display. This property takes a numeric value.

Note

You must specify both the message set and message number for the message to be displayed to the end user.

This property is read/write.

Example

```
&RQST.NotifyTextMsgSet = 65;  
&RQST.NotifyTextMsgNum = 237;
```

Related Topics

- [NotifyTextMsgSet property: ProcessRequest class](#)

NotifyTextMsgSet property: ProcessRequest class

Description

Use this property to specify the message set of the text message to be displayed to the end user in the Event Notification popup display. This property takes a numeric value.

Note

You must specify both the message set and message number for the message to be displayed to the end user.

This property is read/write.

Example

```
&RQST.NotifyTextMsgSet = 65;  
&RQST.NotifyTextMsgNum = 237;
```

Related Topics

- [NotifyTextMsgNum property: ProcessRequest class](#)

OutDest property: ProcessRequest class

Description

This property specifies the output destination for the process or job to be scheduled as a string.

Values depend on the setting for the OutDestType property:

- If OutDestType is FILE, OutDest must be the name of a directory. If the OutDest property isn't set, it defaults to the setting in the Process profile. If the Process Profile was not updated with a default destination, the Process Scheduler server that picked up the request sets the directory based on the Log/Output Directory setting found in the Process Scheduler Configuration file.
- If OutDestType is PRINTER, OutDest must be the name of a printer. If the OutDest property isn't set, it defaults to the setting in the Process profile. If the Process Profile was not updated with a default printer, the Process Scheduler server that picked up the request sets the printer based on the Default Printer setting found in the Process Scheduler Configuration file.
- If OutDestType is WEB or EMAIL, OutDest should contain the list of User IDs, Role IDs, or email addresses (for email only). If you don't set this property, it's automatically assigned to the person who submitted the request.
- If OutDestType is WEB, PeopleSoft Process Scheduler uses the OutDest property to determine who has access to the output.
- If OutDestType is EMAIL, PeopleSoft Process Scheduler uses the OutDest property to determine who to send the report output to.

In both these cases, to identify whether it's a User ID or a Role ID, the value has to be preceded by one of the following:

U: *Username* or User: *Username* for a user ID

R: *Rolename* or Role: *Rolename* for a role ID

If the ID is not preceded by either of these identifiers, Process Scheduler assumes it's an email address.

Note

Each ID must be separated by a semicolon (;).

The following are two examples:

```
&RQST.OutDest = "U:PTDMO;R:Employee;robert_smith@example.com"
```

```
&RQST.OutDest =  
"User:PS;Role:Employee;sue_line@XYZ.com;simon_gree@example.com"
```

- For any other value of OutDestType, this property has no effect.

You can specify directory and printer names using the UNC (Uniform Naming Convention) protocol.

This property is read/write.

Example

```
&MYRQST.OutDest = "C:\TEMP";
```

Related Topics

- [OutDestType property: ProcessRequest class](#)
- Process Scheduler: Understanding the Management of PeopleSoft Process Scheduler

OutDestFormat property: ProcessRequest class

Description

This property specifies the output format for the process or job to be scheduled as a string. Values depend on your settings for the ProcessType and OutDestType properties:

The values for OutDestType, OutDestFormat, and OutDest are dependent upon each other as well as on other values.

See [Values for Output Type and Format](#).

This property is read/write.

Example

```
&MYRQST.OutDestFormat = "RTF";
```

Related Topics

- [ProcessType property: ProcessRequest class](#)
- [OutDestType property: ProcessRequest class](#)

OutDestType property: ProcessRequest class

Description

This property specifies the type of output for the process or job to be scheduled as a string.

If the ProcessRequest object contains an invalid output type for a process, you won't be able to successfully schedule a process or job.

The value specified for this property is used only if the Output Destination Type for the defined process or job defined in PeopleSoft Process Scheduler is specified as Any. Otherwise any value specified for this property is ignored.

The values for OutDestType, OutDestFormat, and OutDest are dependent upon each other as well as on other values.

See [Values for Output Type and Format](#).

This property is read/write.

Example

```
&MYRQST.OutDestType = "FILE";
```

Related Topics

- [ProcessType property: ProcessRequest class](#)
- [RunControlID property: ProcessRequest class](#)

PortalFolder property: ProcessRequest class

Description

This property specifies the name of the report folder associated with a job item as a string. If you're specifying a folder, the folder that you specify must have already been created using Report Manager.

This property is read/write.

ProcessInstance property: ProcessRequest class

Description

This property is a system-generated identification number. PeopleSoft Process Scheduler assigns a ProcessInstance at runtime to each process or job it successfully schedules.

This property is read/write.

Example

```
&MYRQST.Schedule();  
If &MYRQST.Status = 0 then  
    /* process successfully scheduled */  
    &ProcInst = &MYRQST.ProcessInstance;  
Else
```

```
/* do error processing */  
End-If;
```

ProcessName property: ProcessRequest class

Description

This property specifies the name of a predefined process as a string.

To successfully schedule a process, you must assign values to ProcessName, ProcessType, and RunControlID (that is, for the Schedule method to succeed.)

This property is read/write.

Example

```
&MYRQST.ProcessName = "XRFWIN";
```

Related Topics

- [ProcessType property: ProcessRequest class](#)
- [RunControlID property: ProcessRequest class](#)

ProcessType property: ProcessRequest class

Description

This property specifies the name of a predefined process type as a string.

To successfully schedule a process, you must assign values to ProcessName, ProcessType, and RunControlID (that is, for the Schedule method to succeed.)

The values for ProcessType depend on the types of processes you have defined in your system. There are generic process types that are delivered with your installation of PeopleSoft. These process types may include the following:

- Application Engine
- COBOL
- Cube
- nVision
- SQR
- WinWord
- Other

If you define your own processes, you can use the name of that process with the ProcessType property. For example, suppose you create a custom process named "Custom CBL Programs." You could use this as follows:

```
&MyRqst.ProcessType = "Custom CBL Programs";
```

Note that spaces are included in the string for ProcessType.

This property is read/write.

Example

Note that spaces are included in the string for ProcessType.

```
&MYRQST.ProcessType = "Application Engine";
```

Related Topics

- [ProcessName property: ProcessRequest class](#)
- [RunControlID property: ProcessRequest class](#)

RunControlID property: ProcessRequest class

Description

This property returns a string that serves, along with the user ID, as a key that identifies a predefined group of parameters to be used by a process or a job at runtime.

To successfully schedule a process, you must provide values for RunControlID, ProcessName, and ProcessType.

To successfully schedule a job, you must provide values for RunControlID and JobName.

This property is read/write.

Example

```
&MYRQST.RunControlID = "MYRUNCONTROLID";  
or  
&MYRQST.RunControlID = PRCSAMPLEREC.RUN_CNTL_ID;
```

Related Topics

- [JobName property: ProcessRequest class](#)
- [ProcessName property: ProcessRequest class](#)
- [ProcessType property: ProcessRequest class](#)

RunDateTime property: ProcessRequest class

Description

This property contains a DateTime value that specifies when the scheduled process or job will run.

If you don't specify a value for this property, and there is no date time set for the pre-defined process or job, the process or job runs as soon as the Schedule method is executed.

This property is read/write.

Example

The following example schedules the process or job to run as soon as the Schedule method is executed:

```
&MYRQST.RunDateTime = %Datetime;
```

RunLocation property: ProcessRequest class

Description

This property specifies the Process Scheduler Server name the request should be scheduled on. This property takes a string value. Values for RunLocation is a specific server name, such as PSNT.

If no RunLocation is specified, the request is scheduled based on both the default operating system and load balancing options set in the System Settings page.

This property is read/write.

Example

```
&MYRQST.RunLocation = "SERVER";  
or  
&MYRQST.RunLocation = "PSNT";
```

Related Topics

- [Process Scheduler: Viewing the Status of Processes](#)

RunRecurrence property: ProcessRequest class

Description

This property specifies the frequency with which a process or job is to be run as a string. The RunRecurrence value you use must be the name of a Recurrence Definition defined in Process Scheduler Manager to successfully schedule a job or process (that is, for the Schedule method to succeed.)

This property is read/write.

Example

```
&MYRQST.RunRecurrence = "M-F at 5pm";
```

RunStatus property: ProcessRequest class

Description

This property specifies the run status of a process request as a number. This property is used with the UpdateRunStatus method to change the status of a request. Values are:

RunStatus	Description
1	Cancel
2	Delete
3	Error
4	Hold
5	Queued
6	Initiated
7	Processing
8	Cancelled
9	Success
10	Not Successful
11	Posted
12	Unable to post
13	Resend
14	Posting
15	Generated
16	Pending

This property is read/write.

Example

```
&MYRQST.RunStatus = 1;
```

Related Topics

- [UpdateRunStatus method: ProcessRequest class](#)

Status property: ProcessRequest class

Description

This property returns a number based on the result of the last execution of the Schedule method.

Valid returns are:

- Zero if the method succeeded
- Non-zero otherwise

This property is read-only.

Example

```
&MYRQST.Schedule();  
If &MYRQST.Status = 0 then  
    /* Schedule succeeded. */  
Else
```

```
/* Process (job) not scheduled, do error processing */  
End-If;
```

TimeZone property: ProcessRequest class

Description

This property contains a time-zone value that specifies when the scheduled process or job will run. If no value is used for this property, the server time zone is used. This property takes a string value.

This property is read/write.

Example

```
&MyRqst.TimeZone = "EST";
```

ProcessRequest Class Examples

The following section contains examples for scheduling processes and jobs using the ProcessRequest class.

Scheduling a Single Process

The following example is when you're scheduling a single process:

```
Local ProcessRequest &RQST;  
  
/* Create the ProcessRequest Object */  
&RQST = CreateProcessRequest();  
/* Set all the Required Properties */  
&RQST.RunControlID = &sRunCntlId;  
&RQST.ProcessType = &sProcessType;  
&RQST.ProcessName = &sProcessName;  
  
/* Set any Optional Properties for this Process */  
&RQST.RunLocation = &sRunLocation;  
&RQST.RunDateTime = &dtmRunDateTime;  
&RQST.TimeZone = &sTimeZone;  
&RQST.PortalFolder = &sPortalFolder;  
&RQST.RunRecurrence = &sRecurrence;  
&RQST.OutDestType = &sOutDestType;  
&RQST.OutDestFormat = &sOutDestFormat;  
&RQST.OutDest = &sOutputDirectory;  
&RQST.EmailAttachLog = &bEmailAttachLog;  
&RQST.EmailWebReport = &bEmailWebReport;  
&RQST.EmailSubject = &sEmailSubject;  
&RQST.EmailText = &sEmailText;  
  
/* Schedule the Process */  
&RQST.Schedule();
```

Scheduling a Job Where Job Item Changes Are Not Made

The following example is when job item changes aren't made.

```
Local ProcessRequest &RQST;

/* Create the ProcessRequest Object */
&RQST = CreateProcessRequest();

/* Set all the Required Properties */
&RQST.RunControlID = &sRunCntlId;
&RQST.JobName = &sJobName;

/* Set any Optional Main Job Properties */
&RQST.RunLocation = &sRunLocation;
&RQST.RunDateTime = &dtmRunDateTime;
&RQST.TimeZone = &sTimeZone;
&RQST.PortalFolder = &sPortalFolder;
&RQST.RunRecurrence = &sRecurrence;
&RQST.OutDestType = &sOutDestType;
&RQST.OutDestFormat = &sOutDestFormat;
&RQST.OutDest = &sOutputDirectory;
&RQST.EmailAttachLog = &bEmailAttachLog;
&RQST.EmailWebReport = &bEmailWebReport;
&RQST.EmailSubject = &sEmailSubject;
&RQST.EmailText = &sEmailText;

/* Schedule the Job */
&RQST.Schedule();
```

Scheduling a Job Where Job Item Changes Are Made

The following example is when job item changes are made.

```
Local ProcessRequest &RQST;

/* Create the ProcessRequest Object */
&RQST = CreateProcessRequest("PSJob", &sJobName);

/* Set all the Required Properties */
/* Note: the JobName Property has already */
/* been set in the call above, so you don't */
/* have to set it here */
&RQST.RunControlID = &sRunCntlId;
/* Set any Optional Job Item Properties */
&RQST.SetOutputOption(&sOutputType, &sOutputFormat, &sOutputDest, &sJobName,
&n⇒
PrclsItemLevel, &nJobSeqNo);

&RQST.SetEmailOption(&sEmailSubject, &sEmailText, &sEmailAddress, ⇒
&sEmailWebReport, &sEmailAttachLog, &sJobName, &nPrclsItemLevel, &nJobSeqNo);
&RQST.SetItemFolder(&sPortalFolder, &sJobName, &nPrclsItemLevel, &nJobSeqNo);
&RQST.AddDistributionOption(&sDistIdType, &sDistId, &sJobName,
```

```
&nPrCsItemLevel, &n⇒  
JobSeqNo);  
  
/* Set any additional Optional Main Job Properties */  
&RQST.RunLocation = &sRunLocation;  
&RQST.RunDateTime = &dtmRunDateTime;  
&RQST.TimeZone = &sTimeZone;  
&RQST.PortalFolder = &sPortalFolder;  
&RQST.RunRecurrence = &sRecurrence;  
&RQST.OutDestType = &sOutDestType;  
&RQST.OutDestFormat = &sOutDestFormat;  
&RQST.OutDest = &sOutputDirectory;  
&RQST.EmailAttachLog = &bEmailAttachLog;  
&RQST.EmailWebReport = &bEmailWebReport;  
&RQST.EmailSubject = &sEmailSubject;  
&RQST.EmailText = &sEmailText;  
  
/* Schedule the Job */  
&RQST.Schedule();
```

PrCsApi Class

Use the PrCsApi class with file dependant processing. This section includes:

- Scope of a PrCsApi object.
- Data type of PrCsApi object.
- How to import a PrCsApi object
- How to create a PrCsApi object
- PrCsApi reference

See [File Dependant Processing](#).

Scope of a PrCsApi Object

A PrCsApi object can be instantiated only from PeopleCode.

A PrCsApi object can be called from a component, an internet script, or an Application Engine program.

PrCsApi class objects can be of Local, Global, or Component scope.

Data Type of a PrCsApi Object

PrCsApi objects are of type PrCsApi.

```
Local PrCsApi &api = create PrCsApi();
```


How to Import the PrcsApi Class

The PrcsApi class is *not* a built-in class, like Rowset, Field, Record, and so on. It is an Application Class. Before you can use this class in your PeopleCode program, you must import it to your program.

An import statement names either all the classes in a package or one particular application class. For importing the PrcsApi class, PeopleSoft recommends that you import the API class.

The import statement you should use is as follows:

```
import PT_PRCs:API:*
```

Using the asterisks after the package name makes all the application classes directly contained in the named package available.

Related Topics

- [Understanding Application Classes](#)

You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

How to Create a PrcsApi Object

After you've imported the PrcsApi class, you instantiate an object of that class using the constructor for the class and the *Create* function.

The following example creates a new instance of the PrcsApi class, as the variable &api, with local scope:

```
import PT_PRCs:API:*;

Local PrcsApi &api = create PrcsApi();
```

PrcsApi Class Constructor

You must use the constructor for the PrcsApi class to instantiate an instance of that class. The following is the constructor for the PrcsApi class.

PrcsApi method: PrcsApi class

Syntax

```
PrcsApi()
```

Description

Use the PrcsApi constructor to create an instance of the PrcsApi class.

Parameters

None.

Returns

A reference to a PrcsApi object.

PrcsApi Class Methods

In this section, we discuss the PrcsApi class methods. The methods are discussed in alphabetical order.

getAllFileNames method: PrcsAPI class

Syntax

```
getAllFileNames(PrcsInstance)
```

Description

Use the getAllFileNames method to return a list of all the files names detected by the scheduler to initiate this process. The names are returned in an array of string, as full path names.

Parameters

Parameter	Description
<i>PrcsInstance</i>	Specify the process instance for which you want to get all the associated file names, as a number.

Returns

An array of string containing all the files names associated with the specified process.

Example

The following example returns a list of file names.

```
/* QE_OPT_AET is the state record for the application engine program in this⇒  
example */  
  
import PT_PRCS:API:*;  
  
Local PrcsApi &api = create PrcsApi();  
  
Local File &FileIO, &FileLog;  
  
Local array of string &strList = &api.getAllFileNames(QE_OPT_AET.PROCESS_⇒  
INSTANCE);  
/* api call needs process instance as parameter */  
  
/* the api returns list of file names matched by the scheduler for this
```

```
instance */
For &i = 1 To &strList.Len
    &IOFilename = &strList [&i];
    &FileIO = GetFile(&IOFilename, "r", "UTF8", %FilePath_Absolute);
    &FileIO.Delete();
    &FileIO.Close();
End-For;
```

notifyToWindow method: PracsAPI class

Syntax

`notifyToWindow(PracsInstance, Message)`

Description

Use the notifyToWindow method to display additional messages to the window.

If a process is not defined as going to Window, using this method has no effect. The purpose of this method is to display additional messages to the window when an Application Engine process (no other process type) is run to Window.

Parameters

Parameter	Description
<i>PracsInstance</i>	Specify the process instance for which you want to display messages, as a number.
<i>Message</i>	Specify the message you want displayed, as a string.

Returns

A number: 0 if method failed.

Example

The following PeopleCode would be in a step in an application engine program.

```
import PT_PRCS:API:*;

Local PracsApi &api = create PracsApi();

/* QE_AESTATUS_AET is the sate record for this Application Engine program */

&nret = &api.notifyToWindow(QE_AESTATUS_AET.PROCESS_INSTANCE, "Hi There! this
is⇒
First step.");

/* this displays the message on the window */
```

PSSpreadsheet Class

Understanding the PSSpreadsheet Class

The PSSpreadsheet class provides methods to facilitate interaction with Excel workbook files and spreadsheets. The PSSpreadsheet class enables PeopleSoft applications to read, update, and write Excel files. However, the PSSpreadsheet class does not read the row or column level data.

The following methods of the PSSpreadsheet class are used for interacting with Excel workbook files and spreadsheets:

- Workbook operations: Open, Save, SaveAs, GetFileContent methods to operate on the Excel workbook file.
- Sheet operations — CreateSheet, SetActiveSheetName, and SetSheetActivate methods.
- Cell operations: Six SetCellxxx methods to set the value and format of a cell.
- Row and column operations — InsertColumns, InsertRows, RangeColOutline, RangeRowOutline, and SetColumnWidth methods.
- Rowset operations — SetRowSetData method read data from a rowset object.

Related Topics

- PS/nVision: Understanding PeopleCode APIs for Excel
- PS/nVision: Testing PeopleCode APIs

Instantiating the PSSpreadsheet Class

You must use the CreateObject built-in function to instantiate an object of the PSSpreadsheet class:

```
Local object &ssObject;  
&ssObject = CreateObject("PSSpreadsheet");
```

Related Topics

- PeopleCode Language Reference: CreateObject function

PSSpreadsheet Class Methods

In this section, the PSSpreadsheet class methods are presented in alphabetical order.

CreateSheet method: PSSpreadsheet class

Syntax

```
CreateSheet(sheetname)
```

Description

Use the CreateSheet method to create and name a new spreadsheet within the open Excel workbook.

Parameters

Parameter	Description
<i>sheetname</i>	Specifies a String value representing the name of the new spreadsheet.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets Addresses as the name of the new spreadsheet.

```
&sheetname = "Addresses";  
&ssObject.CreateSheet(&sheetname);
```

DeleteSheet method: PSSpreadsheet class

Syntax

```
DeleteSheet(sheetname)
```

Description

Use the DeleteSheet method to delete the specified sheet within an open Excel workbook.

Parameters

Parameter	Description
<i>sheetname</i>	Specifies a String value representing the name of the sheet to be deleted.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example deletes the Addresses sheet.

```
&sheetname = "Addresses";  
&ssObject.DeleteSheet(&sheetname);
```

GetFileContent method: PSSpreadsheet class

Syntax

```
GetFileContent(filename)
```

Description

Use the GetFileContent method to read the Excel workbook file content.

Parameters

Parameter	Description
<i>filename</i>	Specifies a string representing the name of the Excel workbook file from which you want to read the data.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example gets the content of the specified Excel workbook file.

```
&filename = "filedata.xlsx";  
&ssObject.GetFileContent(&filename);
```

InsertColumns method: PSSpreadsheet class

Syntax

```
InsertColumns(startcol, colcount)
```

Description

Use the InsertColumns method to insert one or more columns into the active spreadsheet.

Parameters

Parameter	Description
<i>startcol</i>	Specifies the starting column number.
<i>colcount</i>	Specifies the number of columns to be inserted.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example inserts three columns into the spreadsheet.

```
&startcol = 2;  
&colcount = 3;  
&ssObject.InsertColumns(&startcol, &colcount);
```

InsertRows method: PSSpreadsheet class

Syntax

```
InsertRows(startrow, rowcount)
```

Description

Use the InsertRows method to insert one or more rows into the active spreadsheet.

Parameters

Parameter	Description
<i>startrow</i>	Specifies the starting row number.
<i>rowcount</i>	Specifies the number of rows to be inserted.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example inserts three rows into the spreadsheet.

```
&startrow = 2;  
&rowcount = 3;  
&ssObject.InsertRows(&startrow, &rowcount);
```

Open method: PSSpreadsheet class

Syntax

```
Open(filename, enable_rowsetprocessing)
```

Description

Use the Open method to open or create an Excel workbook file.

Parameters

Parameter	Description
<i>filename</i>	Specifies the name of the Excel workbook file to be opened or created.
<i>enable_rowsetprocessing</i>	Specifies a Boolean value indicating whether to enable rowset processing or disable rowset processing.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example opens an existing or creates a new Excel workbook file.

```
&filename = "myfile.xlsx";  
&ssObject.Open(&filename, True);
```

RangeApplyStyle method: PSSpreadsheet class

Syntax

```
RangeApplyStyle(StyleName, startrow, rowcount, startcol, colcount)
```

Description

Use the RangeApplyStyle method to set the style of the range of cells.

Note

Due to Apache POI restrictions for user defined style lookup, the implementation of the RangeApplyStyle method is based on the following:

Every workbook should contain a sheet named PSSTYLE SHEET.

The STYLE SHEET sheet must create unique names on the first row in different cells.

The custom style sheet must be applied to the cell that contains the unique names.

Parameters

Parameter	Description
<i>StyleName</i>	Specifies the style for the Excel sheet. Possible style names are: • PSChar - Character fields (such as names). • PSDate - Dates. • PSDec - Numbers with decimal places, such as dollar amounts. • PSInt - Integers (such as years). • PSHeading - Column headings. • PSSpacer - Space between data columns.
<i>startrow</i>	Specifies the starting row number.
<i>rowcount</i>	Specifies the number of rows.
<i>startcol</i>	Specifies the starting column number.
<i>colcount</i>	Specifies the number of columns.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

```
&StyleName = "PSInt";  
&startrow = 2;  
&rowcount = 3;  
&startcol = 2;  
&colcount = 3;  
&ssObject.RangeApplyStyle(&StyleName, &startrow, &rowcount, &startcol,  
&colcount);
```

RangeColOutline method: PSSpreadsheet class

Syntax

RangeColOutline(*startcol*, *colcount*, *collapse*)

Description

Use the RangeColOutline method to expand or collapse a range of columns in the active spreadsheet.

Parameters

Parameter	Description
<i>startcol</i>	Specifies the starting column number.
<i>colcount</i>	Specifies the number of columns to be expanded or collapsed.

Parameter	Description
<i>collapse</i>	Specifies a Boolean value indicating whether to collapse or expand the columns.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example collapses three columns.

```
&startcol = 2;  
&colcount = 3;  
&b_collapse = True;  
&ssObject.RangeColOutline(&startcol, &colcount, &b_collapse);
```

RangeRowOutline method: PSSpreadsheet class

Syntax

```
RangeRowOutline(startrow, rowcount, collapse)
```

Description

Use the RangeRowOutline method to expand or collapse a range of rows in the active spreadsheet.

Parameters

Parameter	Description
<i>startrow</i>	Specifies the starting row number.
<i>rowcount</i>	Specifies the number of rows to be expanded or collapsed.
<i>collapse</i>	Specifies a Boolean value indicating whether to collapse or expand the rows.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example collapses three rows.

```
&startrow = 2;  
&rowcount = 3;  
&b_collapse = True;  
&ssObject.RangeRowOutline(&startrow, &rowcount, &b_collapse);
```

Save method: PSSpreadsheet class

Syntax

Save()

Description

Use the Save method to save the Excel workbook file.

Parameters

None.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example saves the Excel workbook file.

```
&ssObject.Save();
```

SaveAs method: PSSpreadsheet class

Syntax

SaveAs(*filename*)

Description

Use the SaveAs method to save the Excel workbook file with a new file name.

Parameters

Parameter	Description
<i>filename</i>	Specifies the new name for the Excel workbook file.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example saves the Excel workbook file with a new name.

```
&filename = "newfile.xlsx";  
&ssObject.SaveAs(&filename);
```

SetActiveSheetName method: PSSpreadsheet class

Syntax

```
SetActiveSheetName(sheetname)
```

Description

Use the SetActiveSheetName method to rename the active sheet within the Excel workbook file.

Parameters

Parameter	Description
<i>sheetname</i>	Specifies the new name for the active sheet within the Excel workbook file.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the name of the active sheet to Accounts.

```
&sheetname = "Accounts";  
&ssObject.SetActiveSheetName(&sheetname);
```

SetCellDate method: PSSpreadsheet class

Syntax

```
SetCellDate(rownum, colnum, date, locale, timezone, format)
```

Description

Use the SetCellDate method to set a date value and format for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.
<i>date</i>	Specifies the date value to be set in the cell.
<i>locale</i>	Specifies the locale for the date cell value.
<i>timezone</i>	Specifies the time zone for the date cell value.
<i>format</i>	Specifies the date format for the cell value.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets a date value and format for the cell within the spreadsheet.

```
&rownum = 2;  
&colnum = 2;  
&data = 120223323;  
&locale = "EN";  
&timezone = "Americas/Los_Angeles";  
&format = "m/d/yy h:mm";  
&ssObject.SetCellDate(&rownum, &colnum, &data, &locale, &timezone, &format);
```

SetCellFormula method: PSSpreadsheet class

Syntax

```
SetCellFormula(rownum, colnum, data)
```

Description

Use the SetCellFormula method to set a formula value for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.
<i>data</i>	Specifies the formula value to be set in the cell.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets a formula as the value for the specified cell within the spreadsheet.

```
&rownum = 2;  
&colnum = 2;  
&data = "2+4";  
&ssObject.SetCellFormula(&rownum, &colnum, &data);
```

SetCellHeaderStyle method: PSSpreadsheet class

Syntax

```
SetCellHeaderStyle(rownum, colnum, redvalue, greenvalue, bluevalue,  
boldweight, color, fontheight, fontname)
```

Description

Use the SetCellHeaderStyle method to set the format for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.
<i>redvalue</i>	Specifies the red color value (from 0 to 256) for the specified cell.
<i>greenvalue</i>	Specifies the green color value (from 0 to 256) for the specified cell.
<i>bluevalue</i>	Specifies the blue color value (from 0 to 256) for the specified cell.
<i>boldweight</i>	Specifies the bold weight for the specified cell.
<i>color</i>	Specifies the color value for the specified cell.
<i>fontheight</i>	Specifies the font height for the specified cell.
<i>fontname</i>	Specifies the name of the font for the specified cell.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the format for the specified cell within the spreadsheet.

```
&rownum = 2;  
&colnum = 2;  
&red = 100;  
&green = 100;  
&blue = 100;  
&boldweight = 10;  
&color = 100;  
&fontheight = 10;  
&fontname = "Helvetica";  
&ssObject.SetCellHeaderStyle(&rownum, &colnum, &red, &green, &blue,  
&boldweight, &color, &fontheight, &fontname);
```

SetCellHyperlink method: PSSpreadsheet class

Syntax

```
SetCellHyperlink(rownum, colnum, link)
```

Description

Use the SetCellHyperlink method to set a hyperlink for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.
<i>link</i>	Specifies the hyperlink value to be set for the specified cell.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the hyperlink value of the specified cell within the spreadsheet.

```
&rownum = 2;  
&colnum = 2;  
&link = "http://www.oracle.com";  
&ssObject.SetCellHyperlink(&rownum, &colnum, &link);
```

SetCellNumber method: PSSpreadsheet class

Syntax

```
SetCellNumber(rownum, colnum, data, format)
```

Description

Use the SetCellNumber method to set a double precision floating point value for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.

Parameter	Description
<i>data</i>	Specifies the double precision floating point value to be set for the specified cell.
<i>format</i>	Specifies the numeric format of the data.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets a numeric value and format for the specified cell within the spreadsheet.

```
&rownum = 2;  
&colnum = 2;  
&data = 120;  
&format = "0.00";  
&ssObject.SetCellNumber(&rownum, &colnum, &data, &format);
```

SetCellString method: PSSpreadsheet class

Syntax

```
SetCellString(rownum, colnum, string)
```

Description

Use the SetCellString method to set a string value for the specified cell in the active spreadsheet.

Parameters

Parameter	Description
<i>rownum</i>	Specifies the row number for the cell.
<i>colnum</i>	Specifies the column number for the cell.
<i>string</i>	Specifies the string value to be set in the cell.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets a string value for the cell.

```
&rownum = 2;  
&colnum = 2;  
&data = "Accounting Department";  
&ssObject.SetCellString(&rownum, &colnum, &data);
```


SetColumnWidth method: PSSpreadsheet class

Syntax

```
SetColumnWidth(colnum, width)
```

Description

Use the SetColumnWidth method to set the width of the specified column in the active spreadsheet.

Parameters

Parameter	Description
<i>colnum</i>	Specifies the column number. Column number must be zero-based.
<i>width</i>	Specifies the width of the column. Set the width in units of 1/256th of a character width.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the column width within the spreadsheet.

```
&colnum = 2;  
&width = 10;  
&ssObject.SetColumnWidth(&colnum, &width);
```

SetRowSetData method: PSSpreadsheet class

Syntax

```
SetRowSetData(&rowset)
```

Description

Use the SetRowSetData method to read the data from a standalone rowset into the spreadsheet.

Parameters

Parameter	Description
<i>&rowset</i>	Specifies an already instantiated standalone Rowset object.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the PeopleSoft rowset data into the spreadsheet.

```
Local number &idx = 1;

Local Rowset &rs;
&rs = CreateRowset(Record.MY_DATA_TBL);
Local integer &rowNum, &colNum, &cellType;
Local string &cellData;

While (&qSQL.Fetch(&rowNum, &colNum, &cellType, &cellData))
    If &idx <> 1 Then
        &rs.InsertRow(&rs.ActiveRowCount);
    End-If;
    &rs(&idx).MY_DATA_TBL.ROWNUM.Value = &rowNum;
    &rs(&idx).MY_DATA_TBL.COLNUM.Value = &colNum;
    &rs(&idx).MY_DATA_TBL.CELLDATA.Value = &cellData;
    &rs(&idx).MY_DATA_TBL.CELLTYPE.Value = &cellType;
    &idx = &idx + 1;
End-While;

&ssObject.SetRowSetData(&rs);
```

Related Topics

- [PeopleCode Language Reference: CreateRowset function](#)

SetSheetActivate method: PSSpreadsheet class

Syntax

```
SetSheetActivate(sheetnum)
```

Description

Use the SetSheetActivate method to activate the specified sheet in the Excel workbook.

Parameters

Parameter	Description
<i>sheetnum</i>	Specifies the number of sheet to be activated in the Excel workbook.

Returns

(Optional) A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example activates sheet 2 within the Excel workbook.

```
&sheetnum = 2;  
&ssObject.SetSheetActivate(&sheetnum);
```

PTDirectTransferObject Class

Understanding the PTDirectTransferObject Class

The PTDirectTransferObject class provides methods and built-in functions for real-time indexing using DirectTransfer. Application developers can use this class to do a synchronous cURL transfer to the search server to update their indexes when they save a component. The built-in functions handle the synchronous communication to the target URL. Any return code (Success/Failure) should be handled by the calling code.

PTDirectTransferObject Class Methods

These methods are used by the PTDirectTransferObject class. The methods are listed in alphabetical order.

SetAuth method: PTDirectTransferObject class

Syntax

```
SetAuth(Authorization)
```

Description

Use the SetAuth method to set the authorization for a request.

Note

The SetAuth method is optional. If you do not use this method, the authorization of the default search instance is used.

Parameters

Parameter	Description
<i>Authorization</i>	Specifies the authorization as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTDObject = CreateDirecttransferObject();  
Local integer &ret = &PTDObject.SetAuth("<user>:<password>");
```

SetBody method: PTDirectTransferObject class

Syntax

SetBody(*Body*)

Description

Use the SetBody method to set the JSON body as string for POST or PUT requests. You can use the CreateJsonBuilder function to form seamless JSON structures.

Note

For PeopleSoft application use, the attributes in the search engine are standardized with a specific suffix to support various analyzers. For example, the DESCR attribute in a search definition is created as DESCR_ORCL_ES_ENG in the search index. Related language fields should use the appropriate language code as a suffix. For example, DESCR_ORCL_ES_FRA for DESCR field in French. DirectTransfer expects the attribute name to be provided as it exists in the search engine. If not, a new field of default mapping is created in the search engine.

Parameters

Parameter	Description
<i>Body</i>	Specifies the body of a request as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTD TObject = CreateDirecttransferObject();
Local JsonBuilder &jb = CreateJsonBuilder();
&jb.StartObject("");
&jb.AddProperty("FIRST_NAME", "MyFirstName");
&jb.AddProperty("LAST_NAME", "MyLastName");
&jb.EndObject("");
Local string &sBody = &jb.ToString();
Local integer &return = &PTD TObject.SetBody(&sBody);
```

SetDocId method: PTDirectTransferObject class

Syntax

SetDocId(*Document_ID*)

Description

Use the SetDocId method to set the document ID for a document to be indexed.

Note

For PeopleSoft use, the document ID is the component URL as drilling url. A complete URL similar to the drilling URL generated through PeopleSoft Query should be provided as input. An update to an existing search document expects the same document ID to be provided in the request, otherwise the search document will be indexed as a new document.

Parameters

Parameter	Description
<i>Document_ID</i>	Specifies a document ID as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTD TObject = CreateDirecttransferObject();  
Local integer &return = &PTD TObject.SetDocId("1");
```

SetHeader method: PTDirectTransferObject class

Syntax

SetHeader(*Header*)

Description

Use the SetHeader method to set the header for the cURL request.

Note

The SetHeader method is optional. The built-in functions internally handle some of the default headers such as, authentication and content type.

Parameters

Parameter	Description
<i>Header</i>	Specifies a header as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTDObject = CreateDirecttransferObject();  
Local integer &ret = &PTDObject.SetHeader("Host: myhost.com");
```

SetIndex method: PTDirectTransferObject class

Syntax

```
SetIndex(Index_Name)
```

Description

Use the SetIndex method to set the name of an index.

Note

Use the database name as a suffix for the index. For example, hc_hrs_app_index_hcmdb01, where hcmdb01 is the name of the database.

Parameters

Parameter	Description
<i>Index_Name</i>	Specifies the name of the index as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTDObject = CreateDirecttransferObject();  
Local integer &return = &PTDObject.SetIndex("testindex");
```

SetMethod method: PTDirectTransferObject class

Syntax

```
SetMethod(HTTP_Method)
```

Description

Use the SetMethod method to set the HTTP method (such as GET, POST, PUT and so on) for the cURL request.

Parameters

Parameter	Description
<i>HTTP_Method</i>	Specifies the HTTP method as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTDObject = CreateDirectttransferObject();  
Local integer &return = &PTDObject.SetMethod("POST");
```

SetOption method: PTDirectTransferObject class

Syntax

```
SetOption(Option_Name,Option_Value)
```

Description

Use the SetOption method to set various options such as USERPWD, MAXREDIRS, MAXFILESIZE and so on.

Note

The SetOption method is optional.

Parameters

Parameter	Description
<i>Option_Name</i>	Specifies the name of the option as a String.
<i>Option_Value</i>	Specifies the value of the option as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTDObject = CreateDirectttransferObject();  
Local integer &return = &PTDObject.SetOption("MAXREDIRS", "2");
```


SetURL method: PTDirectTransferObject class

Syntax

SetURL(*URL*)

Description

Use the SetURL method to set the target URL to which the request is triggered.

Note

This method is optional. If the method is not used, the target URL is set to the URL of the default search instance.

Parameters

Parameter	Description
<i>URL</i>	Specifies the URL as a String.

Returns

An Integer value indicating the libcurl error code.

Example

```
Local PTDirectTransferObject &PTD TObject = CreateDirecttransferObject();  
Local integer &return = &PTD TObject.SetURL("http://host:port/");
```

SyncTransfer method: PTDirectTransferObject class

Syntax

SyncTransfer()

Description

Use the SyncTransfer method to submit a synchronous curl transfer request.

Parameters

None.

Returns

A String value containing the curl response.

Example

```
Local PTDirectTransferObject &PTD TObject = CreateDirecttransferObject();  
Local string &return = &PTD TObject.SyncTransfer();
```

Reset method: PTDirectTransferObject class

Syntax

```
Reset()
```

Description

Use the Reset method to reset the Direct Transfer object.

Parameters

None.

Returns

None.

Example

```
Local PTDirectTransferObject &PTD TObject = CreateDirecttransferObject();  
&PTD TObject.Reset();
```

PTDirectTransferObject Class Built-in Functions

PeopleCode Language Reference: CreateDirecttransferObject() function

PTOCInferenceSupervised Class

Understanding the PTOCInferenceSupervised Class

The PTOCInferenceSupervised class is used for PeopleTools Data Distribution Framework. It provides a mechanism to extract and flatten PeopleSoft data.

This data can be used for the purpose of machine learning. The data is hosted on the search engine server and the machine learning server pulls the data from the search engine to train the machine learning model.

PTOCInferenceSupervised Class Methods

In this section, the PTOCInferenceSupervised class method is discussed.

PredictRun method: PTOCInferenceSupervised class

Syntax

```
PredictRun(&rs, &modelname)
```

Description

The PredictRun method runs prediction endpoint using the collected data and model name. The method converts the rowset data to JSON format and passes it to OCI Data Science.

Instead of using rowset data, you can also use JSON object to provide data to the method. In this case, the syntax is as follows:

```
PredictRun(modelname, json object)
```

Parameters

Parameter	Description
<i>&rs</i>	Specify the rowset.
<i>&modelname</i>	Specify the name of the model as a String value.

Returns

A String value, which is the prediction result from the OCI Data Science service.

Example

The following example uses a rowset to provide data:

```
import PTMLINFERENCE:PTOCInferenceSupervised;
Local PTMLINFERENCE:PTOCInferenceSupervised &ociInf;
Local string &mdlname = "M1";
&ociInf = create PTMLINFERENCE:PTOCInferenceSupervised(&mdlname);
Local Rowset &rs = CreateRowset(Record.EMPLOYEE_TBL);
/* Fill the Rowset */
&ociInf.PredictRun(&rs, &mdlname);
```

The following example uses a JSON object to provide data:

```
Local File &MYFILE;
Local array of string &MYARRAY;
Local string &TEXT;

&MYFILE = GetFile("ES_DUMP_DATA_02.json", "R");
&MYARRAY = CreateArrayRept("", 0);
While &MYFILE.ReadLine(&TEXT);
    &MYARRAY.Push(&TEXT);
End-While;
&MYFILE.Close();

Local object &oci;
&oci = CreateObject("PSOCIDatascience");

Local string &resp = &oci.PredictRun("M1", &TEXT);
WinMessage(&resp);
```

Related Topics

- [Data Distribution Framework: Understanding Data Science Setup](#)

Push Notification Classes

Understanding the PSEvent Class

The PSEvent class provides all of the methods for publishing and subscribing to notifications from the Push Notification Framework. This framework updates the user with real-time changes, known as events, that have occurred on the application server tier. The framework enables PeopleSoft applications to push data directly to the user's display.

Methods of the PSEvent class are used for publishing, subscribing to, and unsubscribing from notifications:

- Publishing a notification — Setxxx methods, Publish method.
- Subscribing to a notification:
 - Subscription — Subscribe method.
 - Callback method — Getxxx methods.
- Unsubscribing to a notification — Unsubscribe method.

Related Topics

- Fluid User Interface Developer's Guide: Understanding the Push Notification Framework

Instantiating the PSEvent Class

You must use the CreateObject built-in function to instantiate an object of the PSEvent class:

```
Local object &EventObject;  
&EventObject = CreateObject("PSEvent");
```

Related Topics

- PeopleCode Language Reference: CreateObject function

PSEvent Class Methods

In this section, the PSEvent class methods are presented in alphabetical order.

AddRecipient method: PSEvent class

Syntax

```
AddRecipient(name, type)
```

Description

Use the `AddRecipient` method to set a specific recipient to receive the notification. Either a user ID or a role name can be specified, but not both.

Note

If no recipients are set for a notification, all the users who have subscribed for that notification will receive the notification.

Parameters

Parameter	Description
<i>name</i>	A string representing the name of the recipient (user ID or role name).
<i>type</i>	A number representing the type of the recipient: • 1 — If the <i>name</i> parameter represents a user ID. • 2 — If the <i>name</i> parameter represents a role name.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the user PTUSER as the recipient.

```
&name = "PTUSER";  
&EventObject.AddRecipient(&name, 1);
```

Related Topics

- [AddRecipients method: PSEvent class](#)
- [GetRecipients method: PSEvent class](#)
- [RemoveRecipients method: PSEvent class](#)

AddRecipients method: PSEvent class

Syntax

```
AddRecipients(names, type)
```

Description

Use the `AddRecipients` method to set multiple recipients to receive the notification. Either user IDs or a role names can be specified, but not both.

Parameters

Parameter	Description
<i>names</i>	A string array representing the name of the recipients (either user IDs or role names).
<i>type</i>	A number representing the type of the recipients: • 1 — If the <i>names</i> parameter represents user IDs. • 2 — If the <i>names</i> parameter represents role names.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets an array of user IDs as the recipients.

```
Local array of string &USERIDS;  
Local string &ROLENAME;  
  
&ROLENAME = "Portal Administrator";  
Local Rowset &rs = CreateRowset(Record.PSROLEUSER);  
&rs.Fill("WHERE ROLENAME=:1", &ROLENAME);  
&USERIDS = CreateArrayRept("", 0);  
For &i = 1 To &rs.RowCount  
    &USERIDS.Push(&rs(&i).PSROLEUSER.ROLEUSER.Value);  
End-For;  
  
&EventObject.AddRecipients(&USERIDS, 1);
```

Related Topics

- [AddRecipient method: PSEvent class](#)
- [GetRecipients method: PSEvent class](#)
- [RemoveRecipients method: PSEvent class](#)

GetRecipients method: PSEvent class

Syntax

```
GetRecipients(type)
```

Description

Use the GetRecipients method to get all the recipients of a particular type from the notification.

Parameters

Parameter	Description
<i>type</i>	A number representing the type of recipients: • 1 — For user IDs. • 2 — For role names.

Returns

An array of string representing the recipients for the specified type.

Example

The following example retrieves all role-type recipients:

```
Local array of string &RoleNames;  
&type = 2;  
RoleNames= &EventObject.GetRecipients(&type);
```

GetRowSetData method: PSEvent class

Syntax

```
GetRowSetData()
```

Description

Use the GetRowSetData method to get the rowset data from the notification.

Parameters

None.

Returns

A Rowset object.

Example

The following example retrieves the rowset data.

```
Local Rowset &oRowset;  
&oRowset = &EventObject.GetRowSetData();
```

Related Topics

- [SetRowSetData method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

GetValueOfKey method: PSEvent class

Syntax

```
GetValueOfKey(key)
```

Description

Use the GetValueOfKey method to get the value for a key from the notification data.

Parameters

Parameter	Description
<i>key</i>	Specify the string representing the name of the key. Key names are defined in the Data Structure field on the Define Server Side Events page.

Returns

A valid string representing the corresponding value for the key, if the key exists. An empty string if the key does not exist.

Example

The following example gets the value for the key named ID.

```
&Key = "ID";  
&Value = &EventObject.GetValueOfKey(&Key);
```

Related Topics

- [SetKeyValuePair method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

Publish method: PSEvent class

Syntax

```
Publish(event_name)
```

Description

Use the Publish method to publish a notification for an event.

Parameters

Parameter	Description
<i>event_name</i>	A string representing the name of the event as defined on the Define Server Side Events page.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example uses a method definition to set event data and then publish a notification named WORKFLOWAPPROVAL.

```
method SendApprovalNotification
    /+ &category as String, +/
    /+ &message as String, +/
    /+ &actionsLink as String, +/
    Local object &EventObject;

    &EventObject = CreateObject("PSEvent");
    &EventObject.SetKeyValuePair("CATEGORYNAME", &category);
    &EventObject.SetKeyValuePair("MESSAGE", &message);
    &EventObject.SetKeyValuePair("ACTIONS LINK", &actionsLink);
    &EventObject.Publish("WORKFLOWAPPROVAL");
end-method;
```

Related Topics

- [Subscribe method: PSEvent class](#)
- [Unsubscribe method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

RemoveRecipients method: PSEvent class

Syntax

```
RemoveRecipients(type)
```

Description

Use the RemoveRecipients method to remove all the recipients of a particular type from the notification.

Parameters

Parameter	Description
<i>type</i>	A number representing the type of recipients: • 1 — For user IDs. • 2 — For role names.

Returns

None.

Example

The following example removes recipients of type "role names" from the notification.

```
&type = 2;  
&EventObject.RemoveRecipients(&type);
```

Related Topics

- [AddRecipient method: PSEvent class](#)
- [AddRecipients method: PSEvent class](#)
- [GetRecipients method: PSEvent class](#)

SetKeyValuePair method: PSEvent class

Syntax

```
SetKeyValuePair(key, value)
```

Description

Use the SetKeyValuePair method to add data in the form key-value pair to the notification.

Note

Notification data can be represented as either key-value pairs or as a rowset, not both. The event definition on the Define Server Side Events page determines the type of data for the notification and therefore the Setxxx method to be used.

Parameters

Parameter	Description
<i>key</i>	Specify the string representing the name of the key. Key names are defined in the Data Structure field on the Define Server Side Events page.
<i>value</i>	Specify the string representing the value.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets the value for the key named "ID".

```
&Key = "ID";  
&Value = "100";  
&EventObject.SetKeyValuePair(&Key, &Value);
```

Related Topics

- [GetValueOfKey method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

SetRowSetData method: PSEvent class

Syntax

```
SetRowSetData(&rowset)
```

Description

Use the SetRowSetData method to set a Rowset object as the data for the notification.

Note

Notification data can be represented as either key-value pairs or as a rowset, not both. The event definition on the Define Server Side Events page determines the type of data for the notification and therefore the Setxxx method to be used.

Parameters

Parameter	Description
<i>&rowset</i>	An already instantiated Rowset object, which acts as the notification data.

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example sets rowset data from the QE_CHART_RECORD record.

```
Local Rowset &oRowset;  
&oRowset = CreateRowset(Record.QE_CHART_RECORD);  
&oRowset.Fill("where QE_CHART_REGION= :1", "MIDWEST");  
&EventObject.SetRowSetData(&oRowset);
```

Related Topics

- [GetRowSetData method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

Subscribe method: PSEvent class

Syntax

```
Subscribe(event_name, callback_method)
```

Description

Use the Subscribe method to have the PeopleCode program running on the application server subscribe to a notification for an event. Alternatively, JavaScript provides different mechanisms for subscribing to a notification for an event from a PeopleSoft page.

Parameters

Parameter	Description
<i>event_name</i>	A string representing the name of the event as defined on the Define Server Side Events page.
<i>callback_method</i>	A string value representing the method to be invoked when the notification is received by the subscriber. The string must be a fully qualified method name in the form: APP_PKG:App_Class:Method_Name

Returns

A Boolean value: True if the method completes successfully, False otherwise.

Example

The following example subscribes to a notification named PROCESSSTATUSCHANGE:

```
&EventObject.Subscribe("PROCESSSTATUSCHANGE",  
"PT_PRCS:ProcessMonitor:OnProcessStatusChange");
```

This example requires the implementation of a callback method named OnProcessStatusChange in the PT_PRCS:ProcessMonitor application class:

```
class ProcessMonitor  
    method OnProcessStatusChange(&EventObject As object);  
end-class;  
method OnProcessStatusChange  
    /* &EventObject as Object */  
    Local string &ID;  
    Local string &PROCESSNAME;  
    Local string &KEY;  
  
    &KEY = "ID";  
    &ID = &EventObject.GetValueOfKey(&KEY);  
  
    &KEY = "PROCESSNAME";  
    &PROCESSNAME = &EventObject.GetValueOfKey(&KEY);  
end-method;
```

Related Topics

- [Publish method: PSEvent class](#)

- [Unsubscribe method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events
- Fluid User Interface Developer's Guide: Subscribing to Events

Unsubscribe method: PSEvent class

Syntax

```
Unsubscribe(event_name)
```

Description

Use the Unsubscribe method to unsubscribes from a notification for an event..

Parameters

Parameter	Description
<i>event_name</i>	A string representing the name of the event as defined on the Define Server Side Events page.

Returns

None.

Example

The following example unsubscribes from a notification named PROCESSSTATUSCHANGE.

```
&eventName = "PROCESSSTATUSCHANGE";  
&EventObject.Unsubscribe(&eventName);
```

Related Topics

- [Publish method: PSEvent class](#)
- [Subscribe method: PSEvent class](#)
- Fluid User Interface Developer's Guide: Defining Events

PTNotification Class

This section provides an overview of the PTNotification class and discusses its methods.

The PTNotification application class can be used to send notifications based on the user preferences. It also provides option to send notifications without considering the user preferences, which can be used to send notifications to non-PeopleSoft users.

PTNotification Class Methods

In this section, the PTNotification methods are described in alphabetical order.

AddAction method: PTNotification class

Syntax

```
AddAction(Label, URL)
```

Description

Use the AddAction method to collate all the actions and to invoke the SetArrayOfActions of the PublishToWindow method.

Parameters

Parameter	Description
<i>Label</i>	Specifies the label of an action as a String value.
<i>URL</i>	Specifies the URL as a String value.

Returns

None.

AddAttachment method: PTNotification class

See [AddAttachment method: MCFEmail class](#).

AddHeader method: PTNotification class

See [AddHeader method: MCFEmail class](#).

AddRecipient method: PTNotification class

Syntax

```
AddRecipient(recipient_type, value)
```

Description

Use this method to add a single recipient.

Parameters

Parameter	Description
<i>recipient_type</i>	Specify the recipient type as a numeric value or a constant value: • Operator ID: Use either 1 or %Recipient_OPRID. • Role name: Use either 2 or %Recipient_Role. • External email address: Use either 3 or %Recipient_Mail. • External phone number: Use either 4 or %Recipient_Phone.
<i>value</i>	Specifies the value for the selected recipient type, for example, PeopleSoft OPRID for operator. Specify a number in E164 format for external phone number.

Returns

None.

Example

```
import PTNOTIFICATIONS:PTNotification;

Local object &objBroadcast = create
PTNOTIFICATIONS:PTNotification("BROADCAST");
&objBroadcast.AddRecipient(1, "PTDMO");
&objBroadcast.AddRecipient(2, "Peoplesoft User");
&objBroadcast.AddRecipient(3, "external@peoplesoft.com");
&objBroadcast.AddRecipient(4, "+910000000000");
&objBroadcast.SetMessage("This is for demo", 0);
&objBroadcast.SetCategory("FYI");

&bRetCode = &objBroadcast.Send();
```

Related Topics

- [AddRecipients method: PTNotification class](#)

AddRecipients method: PTNotification class

Syntax

```
AddRecipients(recipient_type, value)
```

Description

Use this method to add multiple recipients of the same type.

Parameters

Parameter	Description
<i>recipient_type</i>	Specify the recipient type as a numeric value or a constant value: • Operator ID: Use either 1 or %Recipient_OPRID. • Role name: Use either 2 or %Recipient_Role. • External email address: Use either 3 or %Recipient_Mail. • External phone number: Use either 4 or %Recipient_Phone.
<i>value</i>	Specifies the values for the recipient type as an array. Specify a number in E164 format for external phone number.

Returns

None.

Related Topics

- [AddRecipient method: PTNotification class](#)

AddTextAttachment method: PTNotification class

Syntax

```
AddTextAttachment(URLIdentifier, FileName, IsUserSpecific)
```

Description

Use this method to add an attachment to a text message, but the attachment should be limited to one. If the attachment count is not limited to one, the URL to access the attachments will be long and may be split into multiple messages thereby making it difficult to access the file. The method creates a URL to access the attachment. The URL is iScript based, and you should ensure that necessary permissions are granted to the users to access the iScript library. If the access is not granted, users will not be able to download the attachment.

When a user clicks the URL that they receive, the user is authenticated. If the authentication is successful, a verification process checks whether the URL is created for the logged in user. On successful verification, the attachment is streamed to the user. The attachment is first copied from the repository to a temporary store and then streamed to the user. On completing the streaming process, the file is cleared from the temporary store.

This method does not evaluate whether the attachment exists in the specified URL. Whether the file exists in the specified URL is validated when a user accesses the file.

Parameters

Parameter	Description
<i>URLIdentifier</i>	Specify a URL Identifier.

Parameter	Description
<i>FileName</i>	Specify the name of the file that you want to attach, as a string. You must include the file extension as well. FileName can include %UserId% as a template variable, which at runtime is replaced with the actual user ID of the recipient.
<i>IsUserSpecific</i>	This parameter, as a Boolean value, controls how the URL is generated. • True - The application class dynamically creates URL for each user. Use this option when recipients are passed as a role or when multiple recipients are specified. • False - The application class creates URL without user context. The generated URL is valid for any PeopleSoft user with permissions to access the web library.

Returns

A Boolean value, True if an attachment is added to the text message; False otherwise.

Example

```
&bRetCode = &objBroadcast.AddTextAttachment(@"URL.URLIDENTIFIER"),  
"%UserId%_attachment.pdf", true );
```

Related Topics

- [AddTextMedia method: PTNotification class](#)

AddTextMedia method: PTNotification class

Syntax

```
AddTextMedia(FilePath)
```

Description

Twilio supports adding media to text message through it's media URL. Use this method to specify the path of the file and add it to the Twilio media URL. You should ensure that the URL is a direct link to the file. Ensure that the file or media is supported by the Twilio MIME types and that you provide valid HTTP or HTTPS URLs conforming to Twilio standards. For information on supported MIME types and valid URLs, refer to the Twilio documentation (www.twilio.com).

Parameters

Parameter	Description
<i>FilePath</i>	Specify the path to the file.

Returns

None.

Example

```
&objBroadcast.AddTextMedia("https://www.w3.org/WAI/ER/tests/xhtml/testfiles/  
resources/pdf/dummy.pdf");
```

Related Topics

- [AddTextAttachment method: PTNotification class](#)

DisableIndividualMail method: PTNotification class

Syntax

```
DisableIndividualMail()
```

Description

Use this method to insert all the recipients in the To list and send one mail to all users based on the user preferences. If not, each user receives an individual mail.

Parameters

None.

Returns

None.

EnableTracking method: PTNotification class

Syntax

```
EnableTracking()
```

Description

Use this method to track the delivery status (of In-app, email, and text notifications) for each user, however tracking the delivery status may impact performance.

You should invoke the EnableTracking method before calling the Send method. By default, status tracking is not enabled, so you should enable tracking explicitly.

The tracking status can be fetched by calling the GetNotificationStatus or GetUserNotificationStatus method after the notification is sent successfully. The status does not imply that the user received the message. The status only indicates whether the message is successfully sent out of the PeopleSoft system or not. You can check the actual status on corresponding servers, for example, Twilio message monitor for text notifications.

Parameters

None.

Returns

None.

Example

```
&objBroadcast.EnableTracking();
```

Related Topics

- [GetNotificationStatus method: PTNotification class](#)
- [GetUserNotificationStatus method: PTNotification class](#)

GenerateKey method: PTNotification class

Syntax

```
GenerateKey()
```

Description

Use this method to generate a key, which should be used with the SetMsgKey method.

Parameters

None.

Returns

A string containing the generated key.

Related Topics

- [SetMsgKey method: PTNotification class](#)

GetFailedPhoneNumbers method: PTNotification class

Syntax

```
GetFailedPhoneNumbers()
```

Description

Use this method to retrieve phone numbers to which text message could not be sent.

Parameters

None.

Returns

An array of string containing phone numbers.

Related Topics

- [GetSentToPhoneNumbers method: PTNotification class](#)

GetInvalidMailAddresses method: PTNotification class

Syntax

```
GetInvalidMailAddresses()
```

Description

Use this method to retrieve invalid mail addresses from the MCFOutboundEmail object.

Parameters

None.

Returns

A string containing mail address from the MCFOutboundEmail object.

Related Topics

- [GetSentMailAddresses method: PTNotification class](#)
- [GetUnsentMailAddresses method: PTNotification class](#)
- [InvalidAddresses property: MCFOutboundEmail class](#)

GetMailErrorDescription method: PTNotification class

Syntax

```
GetMailErrorDescription()
```

Description

Use this method to retrieve mail error description from the MCFOutboundEmail object.

Parameters

None.

Returns

A string containing error description from the MCFOutboundEmail object.

When multiple mails are sent, the errors could be logged in application logs, and this error string only mentions that the error descriptions are available in logs.

Related Topics

- [GetMailErrorDetails method: PTNotification class](#)
- [ErrorDescription property: MCFOutboundEmail class](#)

GetMailErrorDetails method: PTNotification class

Syntax

```
GetMailErrorDetails()
```

Description

Use this method to retrieve mail error details from the MCFOutboundEmail object.

Parameters

None.

Returns

A string containing error details from the MCFOutboundEmail object.

When multiple mails are sent, the errors could be logged in application logs, and this error string only mentions that the error descriptions are available in logs.

Related Topics

- [GetMailErrorDescription method: PTNotification class](#)
- [ErrorDetails property: MCFOutboundEmail class](#)

GetNotificationStatus method: PTNotification class

Syntax

```
GetNotificationStatus()
```

Description

Use the GetNotificationStatus method to retrieve the notification channels that are enabled for a list of recipients. You should invoke this method after calling the Send method.

Parameters

None.

Returns

A two-dimensional array containing the user ID of the recipient and a string representing the enabled channels in the order of In-app, mail, and text.

The following table describes the character representation of the return string.

In-app	Mail	Text	Return String
Not enabled	Not enabled	Not enabled	NNN
Not enabled	Not enabled	Enabled	NNY
Not enabled	Enabled	Not enabled	NYN
Not enabled	Enabled	Enabled	NYY

In-app	Mail	Text	Return String
Enabled	Not enabled	Not enabled	YNN
Enabled	Not enabled	Enabled	YNY
Enabled	Enabled	Not enabled	YYN
Enabled	Enabled	Enabled	YYY

Example

```
&arStatus = &objBroadcast.GetNotificationStatus();
```

Related Topics

- [EnableTracking method: PTNotification class](#)
- [GetUserNotificationStatus method: PTNotification class](#)

GetSentMailAddresses method: PTNotification class

Syntax

```
GetSentMailAddresses( )
```

Description

Use this method to retrieve valid sent mail addresses from the MCFOutboundEmail object.

Parameters

None.

Returns

A string containing sent mail addresses (comma separated) from the MCFOutboundEmail object.

Related Topics

- [GetInvalidMailAddresses method: PTNotification class](#)
- [GetUnsentMailAddresses method: PTNotification class](#)
- [ValidSentAddresses property: MCFOutboundEmail class](#)

GetSentToPhoneNumbers method: PTNotification class

Syntax

```
GetSentToPhoneNumbers( )
```

Description

Use this method to retrieve phone numbers to which text message is sent.

Parameters

None.

Returns

An array of string containing phone numbers.

Related Topics

- [GetFailedPhoneNumbers method: PTNotification class](#)

GetTextMsgCount method: PTNotification class

Syntax

```
GetTextMsgCount()
```

Description

Use this method to retrieve the number of text messages that are sent successfully.

Parameters

None.

Returns

Number; the count of text messages sent successfully.

Related Topics

- [LogTextMessageSID method: PTNotification class](#)

GetUnsentMailAddresses method: PTNotification class

Syntax

```
GetUnsentMailAddresses()
```

Description

Use this method to retrieve valid mail addresses of messages that were not sent from the MCFOutboundEmail object.

Parameters

None.

Returns

A string containing comma separated mail addresses from the MCFOutboundEmail object.

Related Topics

- [GetSentMailAddresses method: PTNotification class](#)
- [ValidUnsentAddresses property: MCFOutboundEmail class](#)

- [GetInvalidMailAddresses method: PTNotification class](#)

GetUserNotificationStatus method: PTNotification class

Syntax

```
GetUserNotificationStatus(oprid)
```

Description

Use the GetUserNotificationStatus method to retrieve the notification channels that are enabled for a specified recipient. You should invoke this method after calling the Send method.

Parameters

Parameter	Description
<i>oprid</i>	Specifies the user ID of the recipient as a String.

Returns

A string representing the enabled channels in the order of In-app, mail, and text.

The following table describes the channels enabled for a recipient and the returned String value.

In-app	Mail	Text	Return String
Not enabled	Not enabled	Not enabled	NNN
Not enabled	Not enabled	Enabled	NNY
Not enabled	Enabled	Not enabled	NYN
Not enabled	Enabled	Enabled	NYY
Enabled	Not enabled	Not enabled	YNN
Enabled	Not enabled	Enabled	YNY
Enabled	Enabled	Not enabled	YYN
Enabled	Enabled	Enabled	YYY

Example

```
&status = &objBroadcast.GetUserNotificationStatus( "USERID");
```

Related Topics

- [EnableTracking method: PTNotification class](#)
- [GetNotificationStatus method: PTNotification class](#)

LogTextMessageSID method: PTNotification class

Syntax

```
LogTextMessageSID(&bFlag)
```

Description

Use this method to specify whether to log SID for each text message that is sent. You can use the SID for troubleshooting.

Parameters

Parameter	Description
<i>&bFlag</i>	Specifies whether to log SID for each text message that is sent as a Boolean value.

Returns

None.

Related Topics

- [GetTextMsgCount method: PTNotification class](#)

NotifyHeadersOnly method: PTNotification class

Syntax

```
NotifyHeadersOnly()
```

Description

This method sets the StatusNotifyReturn property's value to HDRS for mail; otherwise it sets the value to FULL.

Parameters

None.

Returns

None.

Related Topics

- [StatusNotifyReturn property: MCFOutboundEmail class](#)

NotifyOnDelay method: PTNotification class

Syntax

```
NotifyOnDelay(&Flag)
```

Description

Use this method to specify whether the value of the StatusNotifyOptions property should be set to DELAY for email.

Parameters

Parameter	Description
<i>&Flag</i>	Specifies whether to set the value of the StatusNotifyOptions property to DELAY as a Boolean value.

Returns

None.

Related Topics

- [StatusNotifyOptions property: MCFOutboundEmail class](#)
- [NotifyOnError method: PTNotification class](#)
- [NotifyOnSuccess method: PTNotification class](#)

NotifyOnError method: PTNotification class

Syntax

NotifyOnError(*&Flag*)

Description

Use this method to specify whether the value of the StatusNotifyOptions property should be set to FAILURE for email.

Parameters

Parameter	Description
<i>&Flag</i>	Specifies whether to set the value of the StatusNotifyOptions property to FAILURE as a Boolean value.

Returns

None.

Related Topics

- [StatusNotifyOptions property: MCFOutboundEmail class](#)
- [NotifyOnDelay method: PTNotification class](#)
- [NotifyOnSuccess method: PTNotification class](#)

NotifyOnSuccess method: PTNotification class

Syntax

NotifyOnSuccess(*&Flag*)

Description

Use this method to specify whether the value of the StatusNotifyOptions property should be set to SUCCESS for email.

Parameters

Parameter	Description
<i>&Flag</i>	Specifies whether to set the value of the StatusNotifyOptions property to SUCCESS as a Boolean value.

Returns

None.

Related Topics

- [StatusNotifyOptions property: MCFOutboundEmail class](#)
- [NotifyOnDelay method: PTNotification class](#)
- [NotifyOnError method: PTNotification class](#)

PTNotification method: PTNotification class

Syntax

```
PTNotification(Notification_name)
```

Description

PTNotification is a constructor method for the PTNotification class. Use PTNotification to instantiate an instance of the class.

The default event name is SENDNOTE.

Parameters

Parameter	Description
<i>Notification_name</i>	Specifies the notification as a String value.

Returns

None.

Example

```
import PTNOTIFICATIONS:PTNotification;

Local object &objBroadcast = create
PTNOTIFICATIONS:PTNotification("BROADCAST");
&objBroadcast.AddRecipient(1, "PTDMO");
&objBroadcast.AddRecipient(2, "Peoplesoft User");
&objBroadcast.AddRecipient(3, "external@peoplesoft.com");
```

```
&objBroadcast.AddRecipient(4, "+910000000000");  
&objBroadcast.SetMessage("This is for demo", 0);  
&objBroadcast.SetCategory("FYI");  
  
&bRetCode = &objBroadcast.Send();
```

Send method: PTNotification class

Syntax

Send()

Description

Use this method to send notifications as per user personalization.

Parameters

None.

Returns

A Boolean value. True if the notification is sent successfully; False otherwise.

Example

```
&bRetCode = &objBroadcast.Send();
```

SetBounceTo method: PTNotification class

Syntax

SetBounceTo(*mail_ID*)

Description

Use the method to specify the email address the system should direct all bounced mail to.

Parameters

Parameter	Description
<i>mail_ID</i>	Specifies the email address as a String value.

Returns

None.

SetCategory method: PTNotification class

Syntax

`SetCategory(Type)`

Description

Use this method to specify a category for notifications.

Parameters

Parameter	Description
<i>Type</i>	Specifies the category for a notification as a String value. Valid values are: • FYI • ACTIONABLE • ACK • WORKABLE Use the Workable category to place a notification, with a Mark Complete button, under Actions in the Notification panel. The Mark Complete button enables a user to dismiss the item from the list directly. See Applications User's Guide: Using the Notifications Panel.

Returns

None.

Example

```
&objBroadcast.SetCategory("FYI");
```

SetMessage method: PTNotification class

Syntax

`SetMessage(message, channel)`

Description

Use this method to set the message payload per channel. For mail channel, content type and encoding are configured separately.

Parameters

Parameter	Description
<i>message</i>	Specifies the message payload as a String value.
<i>channel</i>	Specifies the message channel as a Number value. The channels are as follows: • 0 - All • 1 - Push notification • 2 - Mail notification • 3 - Text notification

Returns

None.

Example

```
&objBroadcast.SetMessage("This is for demo", 0);
```

SetMsgKey method: PTNotification class

Syntax

```
SetMsgKey()
```

Description

Use this method to set a key for a message in In-app notifications. If a key is not provided, a key will be generated automatically through the `GenerateKey` method. The message key is required when you want to track the message and update the status for In-app notifications.

Parameters

None.

Returns

None.

Related Topics

- [GenerateKey method: PTNotification class](#)

SetOnClickUrl method: PTNotification class

Syntax

```
SetOnClickUrl(URL)
```

Description

Use this method to set the redirect URL.

Parameters

Parameter	Description
<i>URL</i>	Specifies the redirect URL as a String value.

Returns

None.

SetPriority method: PTNotification class

Syntax

```
SetPriority(priority)
```

Description

Use this method to set the priority for In-app and mail notifications.

Parameters

Parameter	Description
<i>priority</i>	Specifies the priority for push and mail notifications as a Number. The priority values are as follows: • 0 - Normal. This is the default priority. • 1 - High • 2 - Low

Returns

None.

SetReplyTo method: PTNotification class

Syntax

```
SetReplyTo(mail_ID)
```

Description

Use this method to specify the email address where the reply should be sent.

Parameters

Parameter	Description
<i>mail_ID</i>	Specifies the email address to send the reply as a String value.

Returns

None.

SetSender method: PTNotification class

Syntax

```
SetSender(mail_ID)
```

Description

Use this method to specify the email address of the author of the message.

Parameters

Parameter	Description
<i>mail_ID</i>	Specifies the sender's email address as a String value.

Returns

None.

SetSMTPParam method: PTNotification class

Syntax

```
SetSMTPParam(parameter_name, parameter_value)
```

Description

Use this method to set parameters for the SMTP session to be used for sending the email.

Parameters

Parameter	Description
<i>parameter_name</i>	Specify the name of the parameter you want to overwrite as a String value.
<i>parameter_value</i>	Specify the value for the named parameter that you want used instead of the existing value as a String value..

Returns

None.

SetSubject method: PTNotification class

Syntax

SetSubject(*Subject*)

Description

Use this method to specify the subject of an email.

Parameters

Parameter	Description
<i>Subject</i>	Specifies the subject of mail notification as a String value. By default, the description in notification configuration is set as the subject of the mail notification,

Returns

None.

SetTimeToWait method: PTNotification class

Syntax

SetTimeToWait(*wait_time*)

Description

Use this method to specify the number of milliseconds to wait for the result of send email process. Default value from application server configuration.

Parameters

Parameter	Description
<i>wait_time</i>	Specifies the number of milliseconds.

Returns

None.

SetURLIdForText method: PTNotification class

Syntax

SetURLIdForText(*&urlIdentifier*)

Description

Use this method to overwrite the Twilio account details. By default, system uses the Twilio account configured on PeopleTools, Notification, Notification Administrator, Global Settings page.

If any application wants to use a different From Number, a new URLIdentifier can be configured and used by passing the URLID to this method.

Parameters

Parameter	Description
<i>&urlIdentifier</i>	Specifies the URL identifier as a String value.

Returns

None.

NotificationManager Class

This section provides an overview of the NotificationManager class and discusses its methods.

The NotificationManager class is used to perform create, edit, and delete operations on notification configurations. This class also enables you to maintain user personalizations.

NotificationManager Class Methods

In this section, the NotificationManager methods are described in alphabetical order.

AddPersonalizationList method: NotificationManager class

Syntax

```
AddPersonalizationList(&nType, &value)
```

Description

Use the AddPersonalizationList method to add a permission list or role for a user. It also enables personalizations, if not enabled already.

Parameters

Parameter	Description
<i>&nType</i>	Specifies permission list or role. Valid values: 1 - Permission List 2 - Role
<i>&value</i>	Specifies the permission list or role name.

Returns

None.

Example

```
import PTNC_UTILITY:NotificationManager;

Local object &objNotif = create
PTNC_UTILITY:NotificationManager("DEMONOTIFICATION");

&objNotif.SetEventName("SENDNOTE");
&objNotif.SetDescription("Demo Notifications");
&objNotif.SetFuncCategory("Demo");
&objNotif.SetOwnerId("PT");
&objNotif.SetMandatory( True);

&objNotif.EnablePush( True);
&objNotif.EnableMail( False);
&objNotif.DisableText();

&objNotif.EnablePersonalization( True);
&objNotif.AddPersonalizationList(2, "PeopleSoft User");
&objNotif.AddPersonalizationList(1, "PTPT1200");

Local boolean &bReturn = &objNotif.Save();
```

Related Topics

- [AddPersonalizationLists method: NotificationManager class](#)

AddPersonalizationLists method: NotificationManager class

Syntax

AddPersonalizationLists(*&nType*, *&arrValue*)

Description

Use the AddPersonalizationLists method to add multiple permission lists or roles for a user. It also enables personalizations, if not enabled already.

Parameters

Parameter	Description
<i>&nType</i>	Specifies permission list or role. Valid values: • 1 - Permission list • 2 - Role
<i>&arrValue</i>	Specifies multiple permission lists or role names as an array of string.

Returns

None.

Related Topics

- [AddPersonalizationList method: NotificationManager class](#)

ClearPersonalizationList method: NotificationManager class

Syntax

```
ClearPersonalizationList()
```

Description

Use the ClearPersonalizationList method to clear all the personalization permission lists and roles.

Note

This operation is executed immediately and cannot be rolled back. It does not depend on the Save method.

Parameters

None.

Returns

A Boolean value; True if the personalization is cleared successfully, False otherwise.

Related Topics

- [AddPersonalizationList method: NotificationManager class](#)

Delete method: NotificationManager class

Syntax

```
Delete()
```

Description

Use this method to delete a personalization.

Note

The delete operation is executed immediately and it cannot be rolled back.

Parameters

None.

Returns

A Boolean value; True if the delete completes successfully, False otherwise.

DisableMail method: NotificationManager class

Syntax

```
DisableMail()
```

Description

Use this method to disable email notifications.

Parameters

None.

Returns

None.

Example

```
&objNotif.DisableMail();
```

Related Topics

- [EnableMail method: NotificationManager class](#)

DisablePush method: NotificationManager class

Syntax

```
DisablePush()
```

Description

Use this method to disable In-app notifications, that is, to disable notifications that appear on the Notifications panel on PIA. It will reset the default value too.

Parameters

None.

Returns

None.

Example

```
&objNotif.DisablePush();
```

Related Topics

- [EnablePush method: NotificationManager class](#)

DisableText method: NotificationManager class

Syntax

```
DisableText()
```

Description

Use this method to disable text notifications. It will reset the default value too.

Parameters

None.

Returns

None.

Example

```
&objNotif.DisableText();
```

Related Topics

- [EnableText method: NotificationManager class](#)

EnableMail method: NotificationManager class

Syntax

```
EnableMail(default)
```

Description

Use the EnableMail method to enable mail in notifications.

Parameters

Parameter	Description
<i>default</i>	Specifies whether mail in notifications is available to users as default.

Returns

A Boolean value. True for mail as default; False otherwise.

Example

```
&objNotif.EnableMail(False);
```

Related Topics

- [DisableMail method: NotificationManager class](#)

EnablePersonalization method: NotificationManager class

Syntax

```
EnablePersonalization(&state)
```

Description

Use the EnablePersonalization method to activate personalizations for a user.

Parameters

Parameter	Description
<i>&state</i>	Specifies whether to enable personalization as a Boolean value.

Returns

A Boolean value. True to enable personalization; False otherwise.

Example

```
&objNotif.EnablePersonalization( True);
```

EnablePush method: NotificationManager class

Syntax

```
EnablePush(default)
```

Description

Use the EnablePush method to enable In-app notifications. It will reset the default value too.

Parameters

Parameter	Description
<i>default</i>	Specifies whether In-app notifications are available to users as default.

Returns

A Boolean value. True if In-app notifications is the default; False otherwise.

Example

```
&objNotif.EnablePush(True);
```

Related Topics

- [DisablePush method: NotificationManager class](#)

EnableText method: NotificationManager class

Syntax

```
EnableText(default)
```

Description

Use the EnableText method to enable text notifications. It will reset the default value too.

Parameters

Parameter	Description
<i>default</i>	Specifies whether text notifications is available to users as default..

Returns

A Boolean value. True if text notifications is the default; False otherwise.

Example

```
&objNotif.EnableText(True);
```

Related Topics

- [DisableText method: NotificationManager class](#)

GetCategory method: NotificationManager class

Syntax

```
GetCategory()
```

Description

Use this method to retrieve the functional category of a notification.

Parameters

None.

Returns

A string containing the functional category of a notification.

Related Topics

- [SetFuncCategory method: NotificationManager class](#)

GetDescription method: NotificationManager class

Syntax

```
GetDescription()
```

Description

Use this method to retrieve the description of a notification.

Parameters

None.

Returns

A string containing the description of a notification.

Related Topics

- [SetDescription method: NotificationManager class](#)

GetEventName method: NotificationManager class

Syntax

```
GetEventName()
```

Description

Use this method to retrieve the name of a notification.

Parameters

None.

Returns

A string containing the name of an event.

Example

```
&objNotif.GetEventName();
```

Related Topics

- [SetEventName method: NotificationManager class](#)

GetOwnerDescr method: NotificationManager class

Syntax

```
GetOwnerDescr()
```

Description

Use the GetOwnerDescr method to retrieve the description of an owner, for example, PeopleTools for the PT owner.

Parameters

None.

Returns

A string containing the long description of the owner.

Example

```
&objNotif.GetOwnerDescr();
```

Related Topics

- [GetOwnerId method: NotificationManager class](#)

GetOwnerId method: NotificationManager class

Syntax

```
GetOwnerId()
```

Description

Use the GetOwnerId method to retrieve the owner of a notification.

Parameters

None.

Returns

A string containing the owner ID.

Example

```
&objNotif.GetOwnerId();
```

Related Topics

- [GetOwnerDescr method: NotificationManager class](#)

IsMailAvailable method: NotificationManager class

Syntax

```
IsMailAvailable()
```

Description

Use this method to determine whether mail notification is available or not.

Parameters

None.

Returns

A Boolean value; True if mail notification is available, False otherwise.

Related Topics

- [IsPushAvailable method: NotificationManager class](#)
- [IsTextAvailable method: NotificationManager class](#)

IsMailDefault method: NotificationManager class

Syntax

```
IsMailDefault()
```

Description

Use this method to determine whether mail notification is enabled by default for a notification or not. This method can be true only if the IsMailAvailable method is set to True.

Parameters

None.

Returns

A Boolean value; True if mail notification is enabled by default for a notification, False otherwise.

Related Topics

- [IsPushDefault method: NotificationManager class](#)
- [IsTextDefault method: NotificationManager class](#)

IsMandatory method: NotificationManager class

Syntax

```
IsMandatory()
```

Description

Use this method to determine whether a notification is mandatory.

Parameters

None.

Returns

A Boolean value; True if a notification is mandatory, False otherwise.

IsNew method: NotificationManager class

Syntax

```
IsNew( )
```

Description

Use this method to determine whether a notification is new.

Parameters

None.

Returns

A Boolean value; True if a notification is new, False if a notification with the same name already exists.

IsPersonalizationAllowed method: NotificationManager class

Syntax

```
IsPersonalizationAllowed()
```

Description

Use the IsPersonalizationAllowed method to specify whether personalization is allowed for a user or not.

Parameters

None.

Returns

A Boolean value; True if personalization is allowed, False otherwise.

IsPersonalized method: NotificationManager class

Syntax

```
IsPersonalized(&user)
```

Description

Use this method to determine whether a user has set personalizations or not.

Parameters

Parameter	Description
<i>&user</i>	Specifies a user as a String value.

Returns

A Boolean value; True if the user has set personalizations, False otherwise.

IsPushAvailable method: NotificationManager class

Syntax

```
IsPushAvailable()
```

Description

Use this method to determine whether in-app notification is available or not.

Parameters

None.

Returns

A Boolean value; True if in-app notification is available, False otherwise.

Related Topics

- [IsMailAvailable method: NotificationManager class](#)
- [IsTextAvailable method: NotificationManager class](#)

IsPushDefault method: NotificationManager class

Syntax

```
IsPushDefault()
```

Description

Use this method to determine whether in-app notification is available and is set as default.

Parameters

None.

Returns

A Boolean value; True if in-app notification is available and is set as default, False otherwise.

Related Topics

- [IsMailDefault method: NotificationManager class](#)
- [IsTextDefault method: NotificationManager class](#)

IsTextAvailable method: NotificationManager class

Syntax

```
IsTextAvailable()
```

Description

Use this method to determine whether text notification is available or not.

Parameters

None.

Returns

A Boolean value; True if text notification is available, False otherwise.

Related Topics

- [IsMailAvailable method: NotificationManager class](#)
- [IsPushAvailable method: NotificationManager class](#)

IsTextDefault method: NotificationManager class

Syntax

```
IsTextDefault()
```

Description

Use this method to determine whether text notification is available and is set as default. If text notification is not default, it may be available or not.

Parameters

None.

Returns

A Boolean value; True if text notification is available and is set as default, False otherwise.

Related Topics

- [IsMailDefault method: NotificationManager class](#)
- [IsPushDefault method: NotificationManager class](#)

NotificationManager method: NotificationManager class

Syntax

```
NotificationManager(Notification_name)
```

Description

NotificationManager is a constructor method for the NotificationManager class. Use the NotificationManager method to instantiate an instance of the class.

Parameters

Parameter	Description
<i>Notification_name</i>	Specifies a notification as a String value.

RemoveFromPersonalizationList method: NotificationManager class

Syntax

```
RemoveFromPersonalizationList(&nType, &value)
```

Description

Use this method to remove permission lists or roles from personalization set for a user. The actual deletion takes place on Save.

Parameters

Parameter	Description
<i>&nType</i>	Specifies permission list or role. Valid values: • 1 - Permission list • 2 - Role
<i>&value</i>	Specifies the name of the permission list or role.

Returns

A Boolean value. True if permission list or role is marked for deletion; False otherwise.

Example

```
&objNotif.RemoveFromPersonalizationList(2, "PeopleSoft User");
```


Related Topics

- [AddPersonalizationList method: NotificationManager class](#)
- [AddPersonalizationLists method: NotificationManager class](#)

ResetUserPersonalization method: NotificationManager class

Syntax

```
ResetUserPersonalization(user)
```

Description

Use this method to reset the personalizations for an individual user.

Note

This operation is executed immediately and cannot be rolled back. It does not depend on the Save method.

Parameters

Parameter	Description
<i>user</i>	Specifies a user as a String value.

Returns

None.

Related Topics

- [ResetUserPersonalizations method: NotificationManager class](#)

ResetUserPersonalizations method: NotificationManager class

Syntax

```
ResetUserPersonalizations()
```

Description

Use this method to reset personalizations for all users.

Note

This operation is executed immediately and cannot be rolled back. It does not depend on the Save method.

Parameters

None.

Returns

None.

Related Topics

- [ResetUserPersonalization method: NotificationManager class](#)

Save method: NotificationManager class

Syntax

```
Save()
```

Description

Use the Save method to commit changes to the database.

Parameters

None.

Returns

A Boolean value; True if the Save operation is successful, False otherwise.

Example

```
Local boolean &bReturn = &objNotif.Save();
```

SetDescription method: NotificationManager class

Syntax

```
SetDescription(Description)
```

Description

Use this method to specify the description for a notification.

Parameters

Parameter	Description
<i>Description</i>	Specifies the description for a notification as a string.

Returns

None.

Example

```
&objNotif.SetDescription("Demo Notifications");
```

Related Topics

- [GetDescription method: NotificationManager class](#)

SetEventName method: NotificationManager class

Syntax

```
SetEventName(Event_Name)
```

Description

Use this method to set an event.

Parameters

Parameter	Description
<i>Event_name</i>	Specifies the name of an event as a string.

Returns

None.

Example

```
&objNotif.SetEventName("SENDNOTE");
```

Related Topics

- [GetEventName method: NotificationManager class](#)

SetFuncCategory method: NotificationManager class

Syntax

```
SetFuncCategory(FuncCategory)
```

Description

Use this method to specify a functional category for notifications.

Parameters

Parameter	Description
<i>FuncCategory</i>	Specifies a functional category as a string.

Returns

None.

Example

```
&objNotif.SetFuncCategory("Demo");
```

SetMailAvailable method: NotificationManager class

Syntax

```
SetMailAvailable()
```

Description

Use the SetMailAvailable method to set mail notification as available. This setting has no impact if the mail notification is already available.

Parameters

None.

Returns

None.

Related Topics

- [SetPushAvailable method: NotificationManager class](#)
- [SetTextAvailable method: NotificationManager class](#)

SetMandatory method: NotificationManager class

Syntax

```
SetMandatory(mandatory)
```

Description

Use this method to set a notification as mandatory.

Parameters

Parameter	Description
<i>mandatory</i>	Specifies whether a notification is mandatory or not as a Boolean value.

Returns

None.

SetOwnerId method: NotificationManager class

Syntax

```
SetOwnerId(Owner_ID)
```

Description

Use this method to specify the owner of a notification.

Parameters

Parameter	Description
<i>Owner_ID</i>	Specifies the owner of a notification as a string.

Returns

None.

Example

```
&objNotif.SetOwnerId("PT");
```

Related Topics

- [GetOwnerId method: NotificationManager class](#)
- [GetOwnerDescr method: NotificationManager class](#)

SetPushAvailable method: NotificationManager class

Syntax

```
SetPushAvailable()
```

Description

Use the SetPushAvailable method to set in-app notification as available. This setting has no impact if the in-app notification is already available.

Parameters

None.

Returns

None.

Related Topics

- [SetMailAvailable method: NotificationManager class](#)
- [SetTextAvailable method: NotificationManager class](#)

SetTextAvailable method: NotificationManager class

Syntax

```
SetTextAvailable()
```

Description

Use the SetTextAvailable method to set text notification as available. This setting has no impact if the text notification is already available.

Parameters

None.

Returns

None.

Related Topics

- [SetMailAvailable method: NotificationManager class](#)
- [SetPushAvailable method: NotificationManager class](#)

Query Classes

Understanding Query Classes

You create queries using PeopleSoft Query Manager to extract the data you need from the PeopleSoft database. You can use the query classes in PeopleCode to create a new query, or to modify or delete an existing query. You can also use methods in the Query class to execute the query and have the result set returned as either a rowset or have it format and write the result set to a file. You can also use the query classes to create a SQL statement to be used with the SQL object. In fact, the query classes expose all of the attributes and methods needed by the PeopleSoft Query Manager and Query Viewer applications.

Creating or deleting a query object does not create or delete query information. You must call the appropriate method for that query object directly to create or delete database information, that is, the Create or Delete method.

All of the classes, and most of the properties and methods that make up the query classes, have a GUI representation in PeopleSoft Query Manager. This document assumes that the reader has working knowledge of PeopleSoft Query Manager.

There aren't any external built-in functions for the query classes: objects are instantiated from other objects or from a session object.

Related Topics

- [Understanding Session Class](#)
PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.
- Query: PeopleSoft Query Overview

Collections in the Query Classes

A *collection* is a set of similar things, like a group of already existing queries or QueryRecords. As with everything else in the query classes, collections have a GUI representation in PeopleSoft Query.

For example, when you want to open a query, the search page returns a list of all the available queries. This is equivalent to using the FindQueries session class method to get a Query collection.

The following collections are part of the query classes:

- QuerySelect collection
- QueryDBRecord collection
- QueryDBRecordField collection
- Query collection
- QueryRecord collection

- QueryOutputField collection
- QuerySelectedField collection
- QueryCriteria collection
- QueryExpression collection
- QueryPrompt collection

Life Cycle of a Query

At runtime, there are certain things you want to do with a query, like creating one from scratch, updating the criteria for an existing query, running a query, and so on. The following is an overview of this process, and assumes the most common method to use the query API. These steps are expanded in other sections.

1. Invoke the GetQuery method on the PeopleSoft session object to get a query.
2. Either open the specific query you want using Open, or create a new query using Create.
3. Read the query statistics, or make changes as appropriate, adding records, field, criteria, and so on.
4. Save the changes.
5. (Optional) Use the RunToRowset method to run the query.


Note

Be careful whenever you write a PeopleCode program that uses the RunToRowset method because this method could return a large amount of data that could potentially exceed the memory available. For this reason, RunToRowset should be used only when you know that the query being executed returns a reasonable amount of data, or be sure to use the MaxRows parameter to control the maximum amount of data that can be returned.

Alternatively, you can:

- Use the RunToFile method to execute a scheduled query.
 - Use the RunToString method to run a query and return the result as a formatted string.
6. Close the query.
 7. If you want, you can navigate to PeopleSoft Query Manager, Query Viewer or the Query Designer to run the query.

The following diagram is an overview of life cycle of a Query object , illustrates the most common method to use the query API.

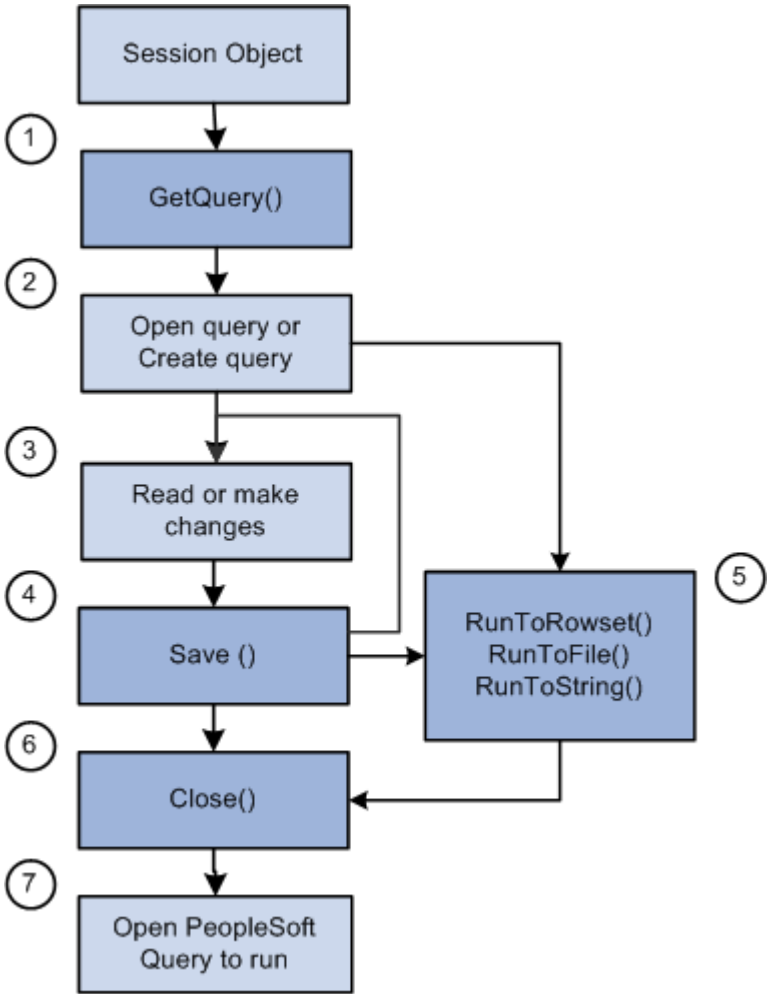

Query API Overview

The query API is made up of many classes. The following are the primary parts, generally used when updating a query:

Field or Control	Description
Query	The query definition.
QuerySelect	A query SELECT statement. There can be multiple QuerySelect objects for queries that involve unions or subqueries. Each select (or union or subquery) consists of QueryRecords, QueryOutputFields, QuerySelectedFields, and QueryCriteria.
QueryRecords	The records that are part of the existing QuerySelect definition.
QueryOutputFields	The fields that you've selected to be displayed when the results of the query are run.

Field or Control	Description
QuerySelectedFields	All the fields that make up the QuerySelect Definition. These include the fields selected as output fields, and fields added as part of Query Expressions.
QueryCriteria	The criteria for the query.
QueryExpression	The Query expressions that can contain SQL functions or other SQL fragments.
QueryList	The lists used in the in-list functionality for criteria.
QueryPrompt	The prompts used in criteria.
QueryDBRecords and QueryDBRecordFields	All the records available to be used as QueryRecords, and all the fields available. This list is restricted based on a user's Query Access Security Groups.

Query

A database query. You must get a query before you can access any of the other query classes. You can then create a new query and save it to the database, or open an existing query and modify it.

QuerySelect

Each query is composed of one or more select statements:

Field or Control	Description
Main Select	The instance of the first SELECT statement of the Query is the Main Select. There can only be one Main Select statement in the Query. This instance consists of the QueryOutputFields, QueryCriteria, and the QueryExpressions for the Main Select statement.
Union	In addition to the Main Select, a query can have one or more unions. The Unions are added by using the AddUnion method.
Sub-Select	A subquery used in the criteria of the Main Select or in a Union.

QueryRecords

The records that are part of an existing query definition. In PeopleSoft Query, these are the records listed on the query tab. Each QuerySelect has its own set of QueryRecords.

QueryOutputFields

The fields that you've selected to be part of the query definition. They're called output fields because when you run the query, these are the fields that make up the output columns.

In PeopleSoft Query, these are the fields listed on the Fields tab.

The collection of `QueryOutputFields` does *not* necessarily include all columns returned in query resultset. This collection only includes columns that have been added to query output collection using the query classes or by an end-user designing a query.

PeopleSoft Query can also add additional columns for related language processing and also for translate labels on fields, and so you cannot use the Query Output Collections as a way to discover all of the columns that are returned in the resultset or by executing the SQL generated from a query.

QuerySelectedFields

All the fields that make up the query definition. These include the fields selected as output fields, and fields added as `QueryExpressions`.

QueryCriteria

The selection criteria for the query. Each `QueryCriteria` object is made up of the following:

Field or Control	Description
Logical	Any criteria objects after the first must include have a Logical value, either AND or OR.
Expression 1	A field or value that you want to base the selection criterion on, that is, Expression1 is the left-hand side of the criterion's comparison.
Operator	A mathematical or other operator used to specify the relationship between Expression 1 and Expression 2.
Expression 2	A field or other value, also called a comparison value, used with Expression 1, that is, Expression2 is the right-hand side of the criterion's comparison.

In PeopleSoft Query, a `QueryCriteria` is under the Criteria tab.

Expression can be made up of constant values, fields, subqueries, and so on.

Related Topics

- [Working With Query Criteria and Expressions](#)
If you run a query after selecting the `QueryFields` (which executes a SQL statement, such as `SELECT EMPLID, DEPTID from PS_QE_EMPLOYEE`), the system retrieves *all* the data in those columns; that is, it retrieves the data from every row in the `QueryRecord` or records because there is no filter limiting the number of rows.

QueryDBRecords and QueryDBRecordFields

A `QueryDBRecord` is a record in the database that can be used as a `QueryRecord`. The list of records is controlled by security: the only records displayed as `QueryDBRecords` are records accessible by the user.

The `QueryDBRecordFields` are the fields that make up the `QueryDBRecords`.

In PeopleSoft Query, the `QueryDBRecords` are under the Record tab. After you click on the plus sign next to a record, the `QueryDBRecordFields` are displayed.

Working With Query Criteria and Expressions

If you run a query after selecting the QueryFields (which executes a SQL statement, such as SELECT EMPLID, DEPTID from PS_QE_EMPLOYEE), the system retrieves *all* the data in those columns; that is, it retrieves the data from every row in the QueryRecord or records because there is no filter limiting the number of rows.

You can select which *rows* of data you want by adding selection criteria to the query.

This document assumes that you know how to use selection criteria. This section discusses working with the QueryCriteria and QueryExpression objects in the query API only.

Related Topics

- Query: Choosing Selection Criteria

Setting the Expression Type

Before you can add a new expression (either Expression 1 or Expression 2) to your QueryCriteria, you must set the type for the expression.

The following code example adds a new criteria, sets the type for the first expression, adds the first expression to the main select of the query definition, then does the same thing for the second expression.

```
&MyQuerySelect = &MyQuery.QuerySelect;
&MyCriteria = &MyQuerySelect.AddCriteria();
/* make expression 1 a field */
&MyCriteria.Expr1Type = %Query_ExprField;
/* add the ABSENCE_TYPE field */
&MyCriteria.AddExpr1Field("A", "ABSENCE_TYPE");
/* make it not equal to */
&MyCriteria.Operator = %Query_CondNotEqual;
/* Make expression 2 a constant */
&MyCriteria.Expr2Type = %Query_ExprConstant;
&MyCriteriaExpr = &MyCriteria.AddExpr2Expression1();
&MyCriteriaExpr.Text = "VAC";
```

Adding New Expressions

When you use any of the QueryCriteria methods to add either a new Expression 1 or Expression 2, you destroy the existing value.

In general, you should use the QueryCriteria methods to add a new Expression 1 or Expression 2 only when you're adding a new criteria to a query.

Adding an Operator and Expression 2 Dependencies

Which values are valid for the Expression 2 type (Expr2Type property) depend on the value of the Operator property.

The following table describes which Expr2Type values are valid with which values of Operator.

Operator	Expression 2
equal to	Constant
not equal to	Field
greater than	Expression
not greater than	Subquery
less than	Prompt
not less than	
Exists	Subquery
not exists	
Like	Constant (with wildcards)
not like	Prompt
is null	
is not null	
in tree	Tree Option
not in tree	Tree Prompt Option
Eff Date <=	Field
Eff Date >=	Expression
Eff Date <	Constant
EffDate >	Current Date
First Eff Date	
Last Eff Date	
in list	In list
not in list	Subquery
Between	Const-Const
Not Between	Const-Field
	Const-Expr
	Field-Const
	Field-Field
	Field-Expr
	Expr-Const
	Expr-Field
	Expr-Expr

Related Topics

- [Operator property: QueryCriteria class](#)

Setting a Drilling URL

A *drilling* URL provides a clickable link in query results allowing a user to drill from the query results to another query, to another component, or to an external site. A drilling URL is defined as a special type of query expression. Like other query expressions, the user can set the drilling URL on the Edit Expression Properties page, or the drilling URL can be set in a PeopleCode program as follows:

```
/* Setting a drilling URL */

&aQueryExpr = &aQuerySelect.AddExpression(&sExprName);
```

```
/* Set the expression type to drilling URL */
&aQueryExpr.Type = %FieldType_URL;

/* Set the expression text and number from record fields */
/* The Text property must conform to expected formats */
&aQueryExpr.Text = &rRecordExpr.QRYCRIT1EXPRTTEXT.Value;
&aQueryExpr.ExpNum = &rRecordExpr.QRYCRIT1EXPNUM.Value;
```

Note

Run-time processing of drilling URLs is backward compatible. Therefore, drilling URLs that were defined in previous releases are expanded correctly in the current release without the need to redefine them.

For a drilling URL, the Text property of the QueryExpression object must conform to one of three expected formats. The value of the Text property is not validated; therefore, it is the calling program's responsibility to ensure that value is complete and correctly formatted. Each of the drilling URL types has a different format as follows:

- The drilling URL for a component requires the following format:

```
'/c/menu.component.market?Action=Usearch_key=unique_field:⇒
unique_field_URL_is_mapped_to'
```

For example:

```
'/c/QE_SAMPLE_APPS.QE_DEPT_TBL.GBL?
Action=U&DEPTID=A.DEPTID&SETID=A.SETID:A.SETID'
```

- The drilling URL for a query requires the following format:

```
'/q/?ICAction=ICQryNameURL={PUBLIC|PRIVATE}.query_name&unique_prompt_key⇒
unique_field:unique_field_URL_is_mapped_to'
```

For example:

```
'/q/?ICAction=ICQryNameURL=PUBLIC.DESTINATION&BIND1=A.DEPTID:B.DEPTID'
```

- The drilling URL for an external site requires the following format:

```
'/e/?url=[full_external_URL]:unique_field_URL_is_mapped_to'
```

For example:

```
'/e/?url=[http://www.yahoo.com]:A.SETID'
```

Related Topics

- [AddTrackingURL method: Query class](#)
- [SetTrackingURL method: Query class](#)

- [Text property: QueryExpression class](#)
- [Type property: QueryExpression class](#)
- Query: Defining Query Drilling URLs

Query Monitor

The query classes provide many methods and properties for examining the QueryStatistics, which you can use to report on the average execution time, the last date and time the query was run, and so on.

You can view the statistics for a query before you save it to the database.

Related Topics

- Query: PeopleSoft Query Overview

Using Query Metadata

There are two ways of accessing information about a query:

- The query classes (QueryOutputField, QueryRecord, and so on).
- The Metadata property.

If you use the Metadata property, the information is presented in a different format. It is also read-only. Using this property can be a quick and easy way to access information about a query.

Each Query Metadata object is a name-value pair. *Name* is an indicator of which Query Metadata property you're accessing, and *Value* is the value of that property.

While the value of each Query Metadata property is unique, the name may or may not be. For example, there is only one description (Descr) for each query, so there is only one Query Metadata property with *name* equal to Descr and *value* equal to the description for the query.

However, there may be more than one record for a query. A Query Metadata property exists for each record, with *name* equal to Record and *value* equal to one of the records in the query. The same is true for Input Param, Expression, Field, and Heading.

The following is a simple PeopleCode program to get the Query Metadata for a private query, ADDRESS_TEMP:

```
Local ApiObject &MyQuery, &MyMetacol, &MyMetadata;
Local File &MyFile;
&MyFile = GetFile("Metadata.Txt", "A", "UTF8");
&MyQuery = %Session.GetQuery();
&Rlst = &MyQuery.Open("ADDRESS_TEMP", False, 1);
If &Rlst = 0 Then
    &MyMetacol = &MyQuery.metadata;
    &MyFile.WriteLine("Name           Value");
    &MyFile.WriteLine("-----");
    For &i = 1 To &MyMetacol.count
        &MyMetadata = &MyMetacol.item(&i);
        &Name = &MyMetadata.name;
        &Value = &MyMetadata.Value;
        &MyFile.WriteLine(&Name | "           " | &Value);
    End-For;
```

```

Else
    WinMessage("Open query not successful");
End-If;

```

Here is the sample output:

Name	Value

Descr	Temporary address query for testing
LongDescr	
Public/Private	QEDMO
LastUpdDttm	2001-11-19-15.06.22.930000
LastUpdOprId	QEDMO
Record	QE_PERS_DATA
Field	QE_EMPLID
Field	QE_NAME
Field	ADDRESS1
Field	ADDRESS2
Field	ADDRESS3
Field	ADDRESS4
Field	CITY
Field	COUNTY
Field	STATE
Field	QE_ZIP
Field	QE_COUNTRY
Heading	ID
Heading	Name
Heading	Address 1
Heading	Address 2
Heading	Address 3
Heading	Address 4
Heading	City
Heading	County
Heading	St
Heading	QE_ZIP
Heading	QE_COUNTRY

Running a Query

With query API, you have the following options for running a query:

- Using the RunToRowset method.
This method takes a QueryPrompt record as input and returns a PeopleCode rowset containing the query result. You should always use a standalone rowset (that is, one that was created using CreateRowset).
- Using the RunToFile method.
This method takes a QueryPrompt record and a file name as input and writes the query result to the file.
- Using the RunToString method.
This method takes a QueryPrompt record and writes the query result to a formatted string.

Note

For the query classes, all Date, Time, and DateTime fields that are part of a query are now required fields when running a query.

Considerations Using the RunTo Methods

RunToRowset may require a lot of memory for the Rowset object; therefore, it also takes more processing time. PeopleSoft recommends that RunToRowset not be used for retrieving large result sets, on the order of 50,000 or more items.

All of the RunTo methods can be called to run a query before saving it—that is, it isn't necessary to first save the query.

The last parameter of all of the RunTo methods is the maximum number of rows to fetch.

- -1 returns all rows regardless of the setting on the security profile.
- 0 returns the maximum number of rows allowed by the security profile.
- >0 is the limit on the number of rows.

Related Topics

- [RunToFile method: Query class](#)
- [RunToRowset method: Query class](#)
- [RunToString method: Query class](#)

Specifying the User's Language

For scheduled queries, the system uses the language specified in the user's profile. It does not use the language selected during signin. The system also uses the International and Regional settings the user specified using My Personalizations. If no personal setting have been specified, the system uses the default installation international settings.

Note

Most PeopleSoft components can default to international settings from the browser if the user has not set any user specific settings. However, this is not available for scheduled queries or any Process Scheduler processes.

Query Security

Security is critical for your business data. Typically, you don't want everyone in your company to have access to all the data. All the standard security features used with PeopleSoft applications are integrated in the PeopleSoft Query, as well as the query classes.

In addition, you can use the QuerySecurityProfile Class to view the current user's security profile for PeopleSoft Query. This class doesn't contain any methods, and all the properties are read-only.

Related Topics

- [QuerySecurityProfile Class](#)
The QuerySecurityProfile class is used to view the current user's security profile for PeopleSoft Query. This class doesn't contain any methods, and all the properties are read-only. An instance of this class is returned by the GetQuerySecurityProfile Session method.
- Security Administration: Security Basics

Error Handling With Query Classes

All errors for the query classes, like the other APIs, are logged in the PSMessages collection, instantiated from a session object. In addition, some methods return error codes. See the individual method description to see if it returns anything.

The query classes log errors "interactively", that is, as they happen. For example, suppose you specified an invalid query name. The error would be logged in the PSMessages collection as soon as you executed the GetQuery method.

When to check for errors is application-specific. However, if you check for errors after every assignment, you may see a performance degradation.

PeopleSoft recommends that you check for invalid prompts after using any of the following methods or properties:

- Save, RunToRowset, or RunToFile Query class methods.
- SQL, RuntimePrompts, or Prompts Query class properties.
- Any of the methods or properties in the QueryPrompts collection.

The easiest way to check for errors is to check the number of messages in the PSMessages collection, using the Count property. If the Count is 0, there are no errors.

```

Local ApiObject &MySession;
Local ApiObject &ERRORCOL;
Local ApiObject &Query, &QueryList;
&MySession = %Session;
If &MySession Then
    /* connection is good */
    &QueryList = &MySession.SearchPublicQueries(%Query_ListQuery, =>
%Query_FindName, "%", True);
    For &I = 1 to &QueryList.Count
        &Query = &QueryList.Item(&I);
        /* Do processing */
        /* Do error checking */
        &ERRORCOL = &MySession.PSMessages;
        If (&ERRORCOL.Count <> 0) Then
            /* errors occurred - do processing */
        Else
            /* no errors */
        End-If;
    End-For;
Else
    /* do processing for no connection */
End-If;

```

Related Topics

- [Error Handling](#)

The session object handles error processing for all the APIs, such as Component Interfaces, the Query API, and so on. From the session object, you can check if there have been any errors.

Understanding QueryOutputFields and QuerySelectedFields

If you select a field from a Query Record, it becomes a QueryOutputField, that is, it becomes one of the columns in the SQL output. QuerySelectedFields consist of displayed fields and Query Expression Fields.

QuerySelectedFields and QueryOutputFields have all the same methods and properties, so in this documentation, they're described together under the heading QueryField.

The collection of QueryOutputFields does *not* necessarily include all columns returned in query resultset. This collection only includes columns that have been added to query output collection using the query classes or by an end-user designing a query.

PeopleSoft Query can also add additional columns for related language processing and also for translate labels on fields, and so you cannot use the Query Output Collections as a way to discover all of the columns that are returned in the resultset or by executing the SQL generated from a query.

Understanding Having Criteria

You can have where (simple) criteria or having criteria in a query. In most cases, you have a WHERE clause only—that is, simple criteria. Having criteria is only used in some special cases of aggregation queries. They represent the HAVING clause of the SQL statement, similar to the following:

```
select A.DEPTID, COUNT(A.EMPLID)

from PS_QE_EMPLOYEE A

group by A.DEPTID

having COUNT(A.EMPLID)>5
```

Having criteria are separated from simple criteria. They're accessed as follows:

- Having criteria are accessed using either the AddHavingCriteria QuerySelect method or HavingCriteria QuerySelect property
- Simple criteria are accessed using either the AddCriteria QuerySelect method or the Criteria QuerySelect property.
- However, the having criteria and the simple criteria have all the same methods and properties, so in this documentation, they're described together under the heading QueryCriteria.

Related Topics

- [Query: Defining HAVING Criteria](#)

Data Type of Query Objects

All query objects, like a query collection, a QueryDBRecord, a QueryExpression, and so on, are declared as type ApiObject. For example,

```
Global ApiObject &MyQuery;
```

```
Local ApiObject &MyExpression;
```

Scope of Query Objects

All query objects can be instantiated from PeopleCode only.

You can use this object anywhere you have PeopleCode—that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

You can only instantiate a query object from a Session object. You *must* instantiate the Session object before you can instantiate a query object or query collection. Use the %Session system variable to connect to the existing session.

```
Local ApiObject &QueryList;
Local ApiObject &MySession;
&MySession = %Session;
If &MySession <> Null Then
    /* connection is good */
    /* Search for public queries of type QUERY, search both the name and*/
    /* description for the pattern MyQ%, and do a case insensitive search */

    &QueryList = &MySession.SearchPublicQueries(1, 3, "MyQ%", False);
Else
    /* do error processing */
End-if;
```

Query Classes Reference

This section provides a reference to the following topics:

- Session class methods in the query API.
- Query collection.
- Query class.
- QuerySelect collection.
- QuerySelect class.
- QueryRecord collection.
- QueryRecord class.
- QueryField collection.
- QueryField class.
- QueryCriteria collection.

- QueryCriteria class.
- QueryExpression collection.
- QueryExpression class.
- QueryList class.
- QueryListValue class.
- QueryRecordHierarchy collection.
- QueryRecordHierarchy class.
- Query Metadata collection.
- Query Metadata class.
- QueryStatistics class.
- QuerySecurityProfile class.
- QueryDBRecord collection.
- QueryDBRecord class.
- QueryDBRecordField collection.
- QueryDBRecordField class.
- QueryPrompt collection.
- QueryPrompt class.

Session Class Methods in the Query API

The following methods are part of the query API. However, they're used with a Session object.

Related Topics

- [Understanding Session Class](#)
PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.

AdvancedSearchQueries method: Session class

Syntax

```
AdvancedSearchQueries(GetFavorites, QueryName, QueryNameOp, Descr, DescrOp, FolderName, FolderNameOp, RecordName, RecordNameOp, FieldName, FieldNameOp, TreeName, TreeNameOp, QueryType, OwnerType, CaseSensitive)
```

Description

Use the AdvancedSearchQueries method to do more complex searches for queries.

Parameters

Parameter	Description
<i>GetFavorites</i>	Specify whether to return only queries marked as favorites. This parameter takes a Boolean value: true if you only want favorite queries returned, false otherwise. If you specify true for this parameter, all other parameters are ignored.
<i>QueryName</i>	Specify the name of the query you want returned, as a string. Use this parameter with the <i>QueryNameOp</i> parameter.
<i>QueryNameOp</i>	Specify the operator to be used with the <i>QueryName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>Descr</i>	Specify the description you want returned, as a string. Use this parameter with the <i>DescrOp</i> parameter.
<i>DescrOp</i>	Specify the operator to be used with the <i>Descr</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>FolderName</i>	Specify the name of the folder of the query or queries you want returned, as a string. Use this parameter with the <i>FolderNameOp</i> parameter.
<i>FolderNameOp</i>	Specify the operator to be used with the <i>FolderName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>RecordName</i>	Specify the name of the record used with the query (queries) you want returned, as a string. Use this parameter with the <i>RecordNameOp</i> parameter.
<i>RecordNameOp</i>	Specify the operator to be used with the <i>RecordName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>FieldName</i>	Specify the name of the field associated with the query (queries) you want returned, as a string. Use this parameter with the <i>FieldNameOp</i> parameter.
<i>FieldNameOp</i>	Specify the operator to be used with the <i>FieldName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>TreeName</i>	Specify the name of the tree associated with the query (queries) you want returned, as a string. Use this parameter with the <i>TreeNameOp</i> parameter.
<i>TreeNameOp</i>	Specify the operator to be used with the <i>TreeName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.

Parameter	Description
<i>QueryType</i>	Specify the type of query, as a string. See below.
<i>OwnerType</i>	Specify the type of owner, whether the query is public or private.
<i>CaseSensitive</i>	This parameter has not yet been implemented.

The values for *QueryType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_Query	Find queries of the type Query.
5	%Query_DBAgent	Find queries of the type Process.
4	%Query_Role	Find queries of the type Role
7	%Query_Archive	Find queries of the type Archive.

Returns

A reference to a Query collection containing zero or more queries.

Note

If the result set contains more than 300 rows, only the first 300 rows are returned.

Using Search Operators

All of the parameters for this method work in pairs, with the value in the first of the paired parameters further distinguished by the search operator used in the second parameter. For example, the value specified in *FieldName* is paired with the value specified in *FieldNameOp*.

All of the search operator parameters use the following values. Note that the format of the value of the first parameter is sometimes affected by the value of the search operator parameter.

Constant	Description
%Query_AdvSrchBegins	Name begins with the values specified.
%Query_AdvSrchContains	Name contains the value specified.
%Query_AdvSrchEquals	Name equals the value specified.
%Query_AdvSrchNotEquals	The name does not equal the value specified.
%Query_AdvSrchLessThan	The name is less than the value specified.
%Query_AdvSrchLessEquals	The name is less than or equal to the value specified.
%Query_AdvSrchGreaterThan	The name is greater than the value specified.
%Query_AdvSrchGreaterEquals	The name is greater than or equal to the value specified.

Constant	Description
%Query_AdvSrchBetween	The name is between two values specified by a comma. Do not use quotation marks. For example, ACCT1,ACCT9.
%Query_AdvSrchIn	The name is in the list specified list. The values are separated with commas. Do not use quotation marks. For example, ACCT1, ACCT2, ACCT3

AdvancedSearchRecords method: Session class

Syntax

```
AdvancedSearchRecords(RecordName, RecordNameOp, Descr, DescrOp, FieldName,  
FieldNameOp, TreeName, TreeNameOp, CaseSensitive)
```

Description

Use the AdvancedSearchRecords method to do more complex searches for records.

Security applies to the results of this list, that is, you have access to all the records your user ID (permission list) allows you to access.

Parameters

Parameter	Description
<i>RecordName</i>	Specify the name of the record you want returned, as a string. Use this parameter with the <i>RecordNameOp</i> parameter.
<i>RecordNameOp</i>	Specify the operator to be used with the <i>RecordName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>Descr</i>	Specify the description you want returned, as a string. Use this parameter with the <i>DescrOp</i> parameter.
<i>DescrOp</i>	Specify the operator to be used with the <i>Descr</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>FolderName</i>	Specify the name of the folder of the records you want returned, as a string. Use this parameter with the <i>FolderNameOp</i> parameter.
<i>FolderNameOp</i>	Specify the operator to be used with the <i>FolderName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>FieldName</i>	Specify the name of the field associated with the record you want returned, as a string. Use this parameter with the <i>FieldNameOp</i> parameter.

Parameter	Description
<i>FieldNameOp</i>	Specify the operator to be used with the <i>FieldName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>TreeName</i>	Specify the name of the tree associated with the record you want returned, as a string. Use this parameter with the <i>TreeNameOp</i> parameter.
<i>TreeNameOp</i>	Specify the operator to be used with the <i>TreeName</i> parameter. The valid values for this parameter are found in the Using Search Operators section, above.
<i>CaseSensitive</i>	Note: This parameter has not been implemented yet. Specify whether the search is case-sensitive. This parameter takes a Boolean value: True, the search is case-sensitive, False, it isn't.

Returns

A reference to a QueryDBRecord collection containing zero or more records.

Note

If the result set contains more than 300 rows, only the first 300 rows are returned.

Using Search Operators

All of the parameters for this method work in pairs, with the value in the first of the paired parameters further distinguished by the search operator used in the second parameter. For example, the value specified in *FieldName* is paired with the value specified in *FieldNameOp*.

All of the search operator parameters use the following values. Note that the format of the value of the first parameter is sometimes affected by the value of the search operator parameter.

Constant	Description
%Query_AdvSrchBegins	Name begins with the values specified.
%Query_AdvSrchContains	Name contains the value specified.
%Query_AdvSrchEquals	Name equals the value specified.
%Query_AdvSrchNotEquals	The name does not equal the value specified.
%Query_AdvSrchLessThan	The name is less than the value specified.
%Query_AdvSrchLessEquals	The name is less than or equal to the value specified.
%Query_AdvSrchGreaterThan	The name is greater than the value specified.
%Query_AdvSrchGreaterEquals	The name is greater than or equal to the value specified.

Constant	Description
%Query_AdvSrchBetween	The name is between two values specified by a comma. Do not use quotation marks. For example, ACCT1,ACCT9.
%Query_AdvSrchIn	The name is in the list specified list. The values are separated with commas. Do not use quotation marks. For example, ACCT1, ACCT2, ACCT3

FindQueryDBRecords method: Session class

Syntax

```
FindQueryDBRecords()
```

Description

The FindQueryDBRecords method returns a reference to a QueryDBRecord collection, filled with zero or more records.

Security applies to the results of this list, that is, you have access to all the records your user ID (permission list) allows you to access.

Parameters

None.

Returns

A reference to a QueryDBRecord collection containing zero or more records.

Related Topics

- [QueryDBRecord Collection](#)
A QueryDBRecord collection is returned from the FindQueryDBRecords session method.
- [Query Collection](#)
A query collection is returned from the following session methods:
- [QueryDBRecord Class](#)
A QueryDBRecord object is returned from the QueryDBRecord Collection methods First, Item, ItemByName, or Next.

FindQueries method: Session class

Syntax

```
FindQueries()
```

Description

The FindQueries method returns a reference to a Query collection, filled with zero or more queries.

Parameters

None.

Returns

A reference to a Query collection containing zero or more queries.

Example

In the following example, all available queries are returned:

```
Local ApiObject &MySession;  
Local ApiObject &MyList;  
&MySession = %Session  
&MyList = &MySession.FindQueries();
```

FindQueries Considerations

FindQueries returns both public and private queries. It depends on your database whether the private query is returned first or the public query. If you have two queries with the same name, it depends on your database whether the first use of Item returns the private or the public query.

Related Topics

- [Open method: Query class](#)
- [FindQueriesDateRange method: Session class](#)
- [Query Collection](#)

A query collection is returned from the following session methods:

FindQueriesDateRange method: Session class

Syntax

```
FindQueriesDateRange(StartDateString, EndDateString)
```

Description

The FindQueriesDateRange method returns a reference to a Query collection, filled with zero or more queries that match the specified date range.

Parameters

Parameter	Description
<i>StartDateString</i>	Specify the year, month, and day of the beginning date that you want to look for. This parameter takes a string value. You can specify the date either as YYYY-MM-DD or YYYY/MM/DD.
<i>EndDateString</i>	Specify the year, month, and day of the end date. This parameter takes a string value. You can specify the date either as YYYY-MM-DD or YYYY/MM/DD.

Returns

A reference to a Query collection containing zero or more queries.

Example

```
Local ApiObject &MySession, &QueryList;  
&MySession = %Session;  
&Start = GetField(VOLUN_ACT_WRK.START_DT_STR).Value;  
&End = GetField(VOLUN_ACT_WRK.END_DT_STR).Value;  
&QueryList = &MySession.FindQueriesDateRange(&Start, &End);
```

FindQueriesDateRange Considerations

FindQueriesDateRange returns both public and private queries. It depends on your database whether the private query is returned first or the public query. If you have two queries with the same name, it depends on your database whether the first use of Item returns the private or the public query.

Related Topics

- [FindQueries method: Session class](#)
 - [Open method: Query class](#)
 - [Query Collection](#)
- A query collection is returned from the following session methods:

GetQuery method: Session class

Syntax

```
GetQuery()
```

Description

The GetQuery method returns an empty query object. After you have an empty query object, you can use it to open an existing query (using the Open method) or to create a new query definition (using the Create method).

Parameters

None.

Returns

A reference to an empty query object if successful, NULL otherwise.

Example

```
&MyQuery = &MySession.GetQuery();  
  
If &MyQuery.Open("PHONELIST") Then
```

Related Topics

- [FindQueries method: Session class](#)

- [FindQueriesDateRange method: Session class](#)
- [Open method: Query class](#)
- [Create method: Query class](#)

GetQuerySecurityProfile method: Session class

Syntax

GetQuerySecurityProfile()

Description

Use GetQuerySecurityProfile to return the current user's security profile for PeopleSoft Query. You can then use the QuerySecurityProfile properties to determine if the user can modify queries, the maximum number of rows to fetch for this user, and so on.

Parameters

None.

Returns

A reference to a QuerySecurityProfile if successful, NULL otherwise.

Example

```
&MySecProfile = %Session.GetQuerySecurityProfile();  
If &MySecProfile.CanModifyQuery Then  
    /* do some processing */  
End-If;
```

Related Topics

- [QuerySecurityProfile Class](#)
The QuerySecurityProfile class is used to view the current user's security profile for PeopleSoft Query. This class doesn't contain any methods, and all the properties are read-only. An instance of this class is returned by the GetQuerySecurityProfile Session method.

SearchQueryDBRecords method: Session class

Syntax

SearchQueryDBRecords(*SearchType*, *Pattern*, *CaseSensitive*)

Description

The SearchQueryDBRecords method returns a reference to a QueryDBRecord collection, filled with zero or more records.

Security applies to the results of this list, that is, you have access to all the records your user ID (permission list) allows you to access.

You can use wildcard characters % and _ when searching. % means find all characters, while _ means find a single character. For example, if you wanted to find all queries that started with the letter M, use "M%" for *Pattern*. To find either DATE or DATA, use "DAT_" for *Pattern*.

These characters can be escaped (that is, ignored) using a \. For example, to search for a query that contains the character %, use \% in *Pattern*.

If *Pattern* is an empty string, this method retrieves all queries of the specified type (that is, specifying "" for *Pattern* is the same as specifying "%").

Parameters

Parameter	Description
<i>SearchType</i>	Specify the type of search to be used with the given pattern. You can use either a constant or a numeric value for this parameter. See below.
<i>Pattern</i>	Specify the pattern to be used when searching for records.
<i>CaseSensitive</i>	Specify whether the search is case-sensitive. This parameter takes a Boolean value: True, the search is case-sensitive, False, it isn't.

The values for *SearchType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_FindName	Search for records with the name matching the given pattern.
2	%Query_FindDescr	Search for records with the description matching the given pattern.
3	%Query_FindNameDescr	Search for records with either the name or the description matching the given pattern.

Returns

A reference to a QueryDBRecord collection containing zero or more records.

Example

```
Local ApiObject &MySession, &DBRecList;  
&MySession = %Session;  
DBRecList = &MySession.SearchQueryDBRecords(%Query_FindName, "A%", False);
```

Related Topics

- [FindQueryDBRecords method: Session class](#)

SearchPrivateQueries method: Session class

Syntax

```
SearchPrivateQueries(QueryType, UserId, SearchType, Pattern, CaseSensitive)
```

Description

The SearchPrivateQueries method returns a reference to a Query collection, filled with zero or more Private queries that match the specified *SearchType*, *UserId*, *Pattern*, and *CaseSensitive* choice

Parameters

Parameter	Description
<i>QueryType</i>	Specify the type of query to be searched for. You can specify either a constant or number value for this parameter. See below.
<i>UserId</i>	Specify the user Id to be used to find currently signed-on user's private queries.
<i>SearchType</i>	Specify the type of search to be used with the given pattern. You can use either a constant or a number value for this parameter. See below.
<i>Pattern</i>	Specify the pattern to be used when searching for queries.
<i>CaseSensitive</i>	Specify whether the search is case-sensitive. This parameter takes a Boolean value: True, the search is case-sensitive, False, it isn't.

The values for *QueryType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_Query	Find queries of the type Query.
3	%Query_DBAgent	Find queries of the type Process.
4	%Query_Role	Find queries of the type Role
10	N/A	Find queries of the type Archive.

The values for *SearchType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_FindName	Search for queries with the name matching the given pattern.
2	%Query_FindDescr	Search for queries with the description matching the given pattern.

Numeric Value	Constant Value	Description
3	%Query_FindNameDescr	Search for queries with either the name or the description matching the given pattern.

Returns

A reference to a Query collection containing zero or more queries.

Example

The following example retrieves all private queries of type Query which start with A and do a case-insensitive search, that is, get all queries starting with A or a.

```
Local ApiObject &MySession, &DBRecList;  
&MySession = %Session;  
DBRecList = &MySession.SearchPrivateQueries(%Query_ListQuery, %UserId, ⇒  
%Query_FindName, "A%", False);
```

Related Topics

- [FindQueries method: Session class](#)
- [FindQueriesDateRange method: Session class](#)
- [SearchPublicQueries method: Session class](#)

SearchPublicQueries method: Session class

Syntax

`SearchPublicQueries(QueryType, SearchType, Pattern, CaseSensitive)`

Description

The SearchPublicQueries method returns a reference to a Query collection, filled with zero or more Public queries that match the specified *SearchType*, *Pattern*, and *CaseSensitive* choice.

Parameters

Parameter	Description
<i>QueryType</i>	Specify the type of query to be searched for. You can specify either a constant or number value for this parameter. See below.
<i>SearchType</i>	Specify the type of search to be used with the given pattern. You can use either a constant or a number value for this parameter. See below.
<i>Pattern</i>	Specify the pattern to be used when searching for queries.
<i>CaseSensitive</i>	Specify whether the search is case-sensitive. This parameter takes a Boolean value: True, the search is case-sensitive, False, it isn't.

The values for *QueryType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_ListQuery	Find queries of the type Query.
3	%Query_ListDBAgent	Find queries of the type Process
4	%Query_ListRole	Find queries of the type Role
10	N/A	Find queries of type Archive

The values for *SearchType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_FindName	Search for queries with the name matching the given pattern.
2	%Query_FindDescr	Search for queries with the description matching the given pattern.
3	%Query_FindNameDescr	Search for queries with either the name or the description matching the given pattern.

Returns

A reference to a Query collection containing zero or more queries.

Example

The following example retrieves all public queries of type Query that start with A and does a case-insensitive search, that is, get all queries starting with A or a.

```
Local ApiObject &MySession, &DBRecList;  
&MySession = %Session;  
DBRecList = &MySession.SearchPublicQueries(%Query_ListQuery, ⇒  
%Query_FindName, "A%", False);
```

Related Topics

- [FindQueries method: Session class](#)
- [FindQueriesDateRange method: Session class](#)
- [SearchPrivateQueries method: Session class](#)

Query Collection

A query collection is returned from the following session methods:

- AdvancedSearchQueries
- FindQueries
- FindQueriesDateRange
- SearchPrivateQueries

- [SearchPublicQueries](#)

Related Topics

- [AdvancedSearchQueries method: Session class](#)
- [FindQueries method: Session class](#)
- [FindQueriesDateRange method: Session class](#)
- [SearchPublicQueries method: Session class](#)
- [SearchPrivateQueries method: Session class](#)

Query Collection Methods

In this section, we discuss each query collection method.

First method: Query collection

Syntax

```
First()
```

Description

The First method returns the first Query object in the Query collection.

Parameters

None.

Returns

A reference to a Query object if successful, NULL otherwise.

Example

```
&MyQuery = &MyCollection.First();
```

Item method: Query collection

Syntax

```
Item(number)
```

Description

The Item method returns the Query object that exists at the *number* position in the Query collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the Query object that you want returned.

Returns

A reference to a Query object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryColl.Count;  
    &MyQuery = &QueryColl.Item(&I);  
    /* do processing */  
End-For;
```

Item Considerations

FindQueries and FindQueriesDateRange return both public and private queries. It depends on your database whether the private query is returned first or the public query. If you have two queries with the same name, it depends on your database whether the first use of Item returns the private or the public query.

ItemByName method: Query collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the Query object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing Query within the Query collection. If you specify an invalid name, the object is NULL. The length of this parameter is 30 characters.

Returns

A reference to a Query object if successful, NULL otherwise.

Example

```
&MyQuery = &MyCollection.ItemByName("PHONELIST");
```

Next method: Query collection

Syntax

```
Next()
```

Description

The Next method returns the next Query object in the Query collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a Query object if successful, NULL otherwise.

Example

```
&MyQuery = &MyCollection.Next();
```

Query Collection Property

In this section, we discuss the Count query collection property.

Count property: Query collection

Description

This property returns the number of Query objects in the Query collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Query Class

A query object is returned from the following:

- The GetQuery session method.
- The Query collection methods First, Item, ItemByName, or Next.

See [GetQuery method: Session class](#).

See [Query Collection](#).

Query Class Methods

In this section, we discuss each Query class method in alphabetical order.

AddPrompt method: Query class

Syntax

```
AddPrompt(PromptName)
```

Description

The AddPrompt method adds a prompt with the given name to the query definition. This method returns a new QueryPrompt object that you can then use to specify details about the prompt.

Note

Prompt names are *not* checked for uniqueness. Each new prompt is just added to the list of prompts.

Parameters

Parameter	Description
<i>PromptName</i>	Specify the name of the new prompt with a string. The length of this parameter is 30 characters.

Returns

A reference to a QueryPrompt object.

Related Topics

- [DeletePrompt method: Query class](#)
- [Prompts property: Query class](#)
- [QueryPrompt Class](#)

A reference to a QueryPrompt is returned by the following:

AddQuerySelect method: Query class

Syntax

```
AddQuerySelect()
```

Description

Use the AddQuerySelect method to add the first Query Select statement into the query definition. This method returns the instance of the newly created QuerySelect.

Parameters

None.

Returns

A reference to a `QuerySelect` object. If the query already contains the Main Select, it returns `NULL`.

Related Topics

- [QuerySelect Collection](#)

A `QuerySelect` collection is returned from the `QuerySelects` property of each `QuerySelect` instance. It contains the unions and subqueries, which are children of the current select statement. PeopleSoft Query allows unions only for the main select. The `QuerySelect` instance for any subqueries cannot have any unions.

AddTrackingURL method: Query class

Syntax

`AddTrackingURL(URLString)`

Description

Use this method to define the base URL used to construct a fully qualified drilling URL. A base URL consists of the following elements:

`http://server_name/servlet_name/site_name/portal_name/node_name`

For example:

`http://example.com:8080/ps/ps_2/EMPLOYEE/EMP_LOCAL`

Because a base URL can be set or derived in several ways, the use of `AddTrackingURL` is required only when the calling program does not have current context to identify the site, portal, and node and the elements of the base URL (portal name, node name, and content type) were not defined when the drilling URL was defined. Specifically, the base URL can be set or derived as follows:

- The portal name, node name, and content type can be defined as optional elements of the query drilling URL definition.
- The portal name, node name, and content type can be derived from the current context (that is, from the URL of the logged in user who is executing the query).
- Finally, these elements can be defined programmatically through `AddTrackingURL`. If either of the first two bullets is true, then the value specified by `AddTrackingURL` is ignored.

Note

The string passed in as the base URL is not validated; therefore, it is the application developer's responsibility to ensure that the value is complete and correctly formatted.

Use this method for batch programs such as Application Engine programs do not operate in the context of a site, portal, and node. Consequently, prior to invoking an Application Engine program, the calling program needs to define and store the base URL so that the Application Engine program can use this stored value with the AddTrackingURL method.

Parameters

Parameter	Description
<i>URLString</i>	Specify the base URL as a string. The base URL is used to construct a fully qualified drilling URL.

Returns

None.

Example

The ExecQry step of the PSQUERY Application Engine program invokes the AddTrackingURL method using a value stored in the run control table prior to executing the query.

```
&aQry = %Session.GetQuery();  
If &aQry.Open(PSQUERY_AET.QRYNAME, &bPublic, False) = 0 Then  
  
    &aQry.AddTrackingURL(PSQUERY_AET.URL);  
    ...  
    &Result = &aQry.RunToFile(&rcdQryPrompts, &sOutFile, %OutDestFormat, 0);  
End-if;
```

Related Topics

- [SetTrackingURL method: Query class](#)
- [Setting a Drilling URL](#)
A *drilling* URL provides a clickable link in query results allowing a user to drill from the query results to another query, to another component, or to an external site. A drilling URL is defined as a special type of query expression. Like other query expressions, the user can set the drilling URL on the Edit Expression Properties page, or the drilling URL can be set in a PeopleCode program as follows:
- Query: Defining Query Drilling URLs

Close method: Query class

Syntax

```
Close()
```

Description

The Close method closes the query, freeing the memory associated with that object, and discarding any changes made to the query since the last save. The Close method can be used only on an open query, not a closed query. This means you must have opened the query with the Open or Create methods before you can close it. To save any changes, you must use the Save method before using Close.

It's very important to close your query when you're finished processing. Canceling out of a page does *not* close a query. You may receive error messages every other time you run your program if you haven't closed your queries.

Parameters

None.

Returns

None.

Related Topics

- [Open method: Query class](#)
- [Save method: Query class](#)
- [Create method: Query class](#)

CopyPrivateQuery method: Query class

Syntax

`CopyPrivateQuery(QueryName, QryType, TargetUserID)`

Description

The CopyPrivateQuery method copies the query from the current user to a user specified by the target user ID.

Parameters

Parameter	Description
<i>QueryName</i>	Name of the query to be copied, as a string.
<i>QryType</i>	Specify the type of query. This parameter takes either a numeric or constant value. See below.
<i>TargetUserID</i>	The user ID to which the query is to be copied, as a string.

The values for *QryType* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_Query	Find queries of the type Query.
4	%Query_Role	Find queries of the type Role.

Numeric Value	Constant Value	Description
5	%Query_DBAgent	Find queries of the type Process.
7	%Query_Archive	Find queries of the type Archive.

Returns

0 if successful.

Create method: Query class

Syntax

```
Create(QueryName, Public, Type, Description, LongDescription)
```

Description

The Create method creates a new query, based on the parameters passed with the method. The specified query must be a *new* query.



Warning

If you specify the name of a query that already exists, the existing query is overwritten by the new query.

The Create method can be used only with a closed query, it cannot be used on an open query.

After you create a new query, you don't have to open it with the Open method. The existing query object points to the new query.

Creating a new query doesn't create the query in the database. You must save the query (with the Save method) to commit it to the database.

Parameters

Parameter	Description
<i>QueryName</i>	Name of the query to be created. This parameter takes a string value. This parameter takes 30 characters. A query name can contain only US ASCII alphabetic and numeric characters, as well as underscores.
<i>Public</i>	Specify if the query is public or private. This parameter takes a Boolean value: True if the query is public, False if it's a private query.
<i>Type</i>	Specify the type of query. This parameter takes either a numeric or constant value. See below.
<i>Description</i>	Specify a short description for the query. This parameter takes a string value. This parameter takes 30 characters.

Parameter	Description
<i>LongDescription</i>	Specify a long description for the query. This parameter takes a string value. The length of this parameter depends on your system database limit for LONG fields.

The values for *Type* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_Query	Query
3	%Query_View	View
4	%Query_Role	Role
5	%Query_DBAgent	Process
7	%Query_Archive	Archive

Returns

An integer value: 0 means the query was created successfully.

Example

```
/* Use the existing session */
&MySession = %Session;
&MyQry = &MySession.GetQuery();
/* create a new query : public type-User */
&Rslt = &MyQry.Create("MYQUERY", True, %Query_Query, "My Query", ⇒
"My first Query");
If &Rslt = 0 Then
    /* Query created successfully */
Else
    /* do error processing */
End-If;
```

Related Topics

- [GetQuery method: Session class](#)
- [Close method: Query class](#)
- [Save method: Query class](#)

Delete method: Query class

Syntax

```
Delete()
```

Description

The Delete method deletes the specified query from the database. The Delete method can be used only with an open query, it cannot be used on a closed query. Before you use the Delete

method, you must explicitly open the query object to be deleted (with either the Open or Create method.)

Parameters

None.

Returns

An integer value: 0 means the query was deleted successfully.

Related Topics

- [Save method: Query class](#)

DeletePrompt method: Query class

Syntax

```
DeletePrompt(PromptNumber)
```

Description

The DeletePrompt method deletes a prompt from a query definition.

Parameters

Parameter	Description
<i>PromptNumber</i>	Specify the numeric location in the query definition of the prompt that you want to delete.

Returns

An integer value: 0 means the query was deleted successfully.

Related Topics

- [AddPrompt method: Query class](#)
- [Prompts property: Query class](#)
- [QueryPrompt Class](#)

A reference to a QueryPrompt is returned by the following:

FindExpression method: Query class

Syntax

```
FindExpression(ExpressionNumber)
```

Description

Use the FindExpression method to search the query definition for an expression with the given expression number. Although expressions are associated with the QuerySelect in which they are defined, PeopleSoft Query doesn't qualify expressions by Select number. Therefore, each expression has a unique number across all QuerySelect objects.

Parameters

Parameter	Description
<i>ExpressionNumber</i>	Specify the numeric value of the expression number to be searched for in the query definition.

Returns

A QueryExpression object if successful, NULL otherwise.

Related Topics

- [AddPrompt method: Query class](#)
- [Prompts property: Query class](#)
- [QueryPrompt Class](#)

A reference to a QueryPrompt is returned by the following:

FormatBinaryResultString method: Query class

Syntax

`FormatBinaryResultString(&Rowset, Output_Format, Start_Row, End_Row)`

Description

Use the FormatBinaryResultString method to generate a string containing the content of the input (the rowset) in XLS format. You can specify the range of rows to be in the rowset to be used as input. The rowset object is created using the RunToRowset method.

Parameters

Parameter	Description
<i>&Rowset</i>	Specify an already instantiated and populated rowset object containing the query result. This rowset is created using the RunToRowset method.
<i>Output_Format</i>	Specify the format of the output. You can specify either a numeric or constant value. See below.
<i>Start_Row</i>	Specify the first row in the rowset that you want to use for output. This parameter takes a numeric value.
<i>End_Row</i>	Specify the last row in the rowset that you want to use for output. This parameter takes a numeric value.

The values for *Output_Format* can be as follows:

Numeric Value	Constant Value	Description
8	%Query_XLS	The output for Excel in HTML format.

Returns

A binary object containing the formatted output.

Example

```
/* Use RowCount, not ActiveRowCount, to get the total number of rows. */  
  
&End = &MyRowset.RowCount;  
  
&FormString = &MyQuery.FormatBinaryResultString (&MyRowset, %Query_XLS, 1,  
&End);
```

Related Topics

- [RunToFile method: Query class](#)
- [RunToRowset method: Query class](#)

FormatResultString method: Query class

Syntax

`FormatResultString(&Rowset, Output_Format, StartRow, EndRow)`

Description

Use the `FormatResultString` method to generate a string containing the content of the input (the rowset) in HTML, PDF, XLS, or CSV format. You can specify the range of rows to be in the rowset to be used as input. The rowset object is created using the `RunToRowset` method.

Parameters

Parameter	Description
<i>&Rowset</i>	Specify an already instantiated and populated rowset object containing the query result. This rowset is created using the <code>RunToRowset</code> method.
<i>Output_Format</i>	Specify the format of the output. You can specify either a numeric or constant value. See below.
<i>Start_Row</i>	Specify the first row in the rowset that you want to use for output. This parameter takes a numeric value.
<i>End_Row</i>	Specify the last row in the rowset that you want to use for output. This parameter takes a numeric value.

The values for *Output_Format* can be as follows:

Numeric Value	Constant Value	Description
2	%Query_PDF	The output is in PDF format.
5	%Query_HTML	The output is in HTML format.
8	%Query_XLS	The output for Excel in HTML format.
14	%Query_TXT	The output for text in CSV format.
20	%Query_XML_XmlP	The output is in XMLP format.

Returns

A string containing the formatted output.

Example

```
/* Use RowCount, not ActiveRowCount, to get the total number of rows. */  
  
&End = &MyRowset.RowCount;  
  
&FormString = &MyQuery.FormatResultString(&MyRowset, %Query_TXT, 1, &End);
```

Related Topics

- [RunToFile method: Query class](#)
- [RunToRowset method: Query class](#)

GetTreePromptCount method: Query class

Syntax

```
GetTreePromptCount()
```

Description

Use the GetTreePromptCount method to get the number of tree prompts if available in the query.

Parameters

None.

Returns

A number that indicates the count of tree prompts used in the query. -1 in case of an error.

Example

In this example, the ExecQry step of the PSQUERY Application Engine program invokes the GetTreePromptCount() method using a value stored in the run control table prior to executing the query.

```
&aQry = %Session.GetQuery();  
If &aQry.Open(PSQUERY_AET.QRYNAME, &bPublic, False) = 0 Then  
    &nTreePromptCount = &aQry.GetTreePromptCount();  
End-if;
```

Open method: Query class

Syntax

Open(QueryName, Public, Update)

Description

The Open method opens the query object specified by the parameters. The Open method can be used only with a closed query, it cannot be used on an open query. You cannot read or set any properties of a query until after you open it.

Parameters

Parameter	Description
<i>QueryName</i>	Specify the name of the query to be opened. You must specify an existing query. This parameter takes a string value.
<i>Public</i>	Specify if the query is public or private. This parameter takes a Boolean value: True if the query is public, False if it's a private query.
<i>Update</i>	This parameter is required, but is unused in this release. You must specify a either True or False.

Returns

An integer value: 0 means the query was opened successfully.

Considerations for Opening Different Types of Queries

When you use the Open method, the system tries to open queries according to the type of query. The following is the order used for searching for the query to open:

1. Query (User)
2. View
3. Role
4. Process
5. Archive

All query names are unique. You can't have two queries with the same name, just of different types.

Related Topics

- [GetQuery method: Session class](#)
- [Close method: Query class](#)
- [Save method: Query class](#)

Rename method: Query class

Syntax

`Rename(NewQueryName)`

Description

The Rename method renames the existing query definition with *NewQueryName*. The Rename method can be used only with an open query, it cannot be used on a closed query. Before you use the Rename method, you must explicitly open the query object to be renamed (with either the Open or Create method.)

Note

The Rename method takes place immediately. You don't have to save the query for the rename to occur.

Parameters

Parameter	Description
<i>NewQueryName</i>	Specify the new name for the existing query. The maximum length of this parameter is 30 characters.

Returns

An integer value: 0 means the query was renamed successfully.

Related Topics

- [Open method: Query class](#)
- [Close method: Query class](#)
- [Save method: Query class](#)

RunToFile method: Query class

Syntax

`RunToFile(&PromptRecord, Destination, OutputFormat, MaxRows)`

Description

Use the RunToFile method to execute the Query and return the result to the file specified with *Destination*. The query should be an existing query in the database, or it should have been saved using the Save method.

Because a Query may have runtime prompts (that is, criteria defined using Prompt), this method requires those values to be passed in when you execute this method. *PromptRecord* is a PeopleCode record object containing the prompt values as fields in the record. You can use the PromptRecord property to obtain this object.

Destination must include the absolute path name of where the file is to be created.

If the specified subdirectory does not exist, this method does *not* automatically create them for you, and you receive an error.

If you specify HTML as the output format, the PeopleSoft Query style sheet PSQUERYSTYLEDEF is used for formatting the output.

Parameters

Parameter	Description
<i>&PromptRecord</i>	Specify an instance of a PeopleCode record that contains the runtime prompts and values required for running the query.
<i>Destination</i>	Specify the absolute path name of where the files are to be created.
<i>OutputFormat</i>	Specify the format of the data being written to the file. You can use either a constant or a numeric value for this parameter. See below.
<i>MaxRows</i>	Specify the maximum number of rows to be fetched. This parameter takes a numeric value. The values are: -1 returns all rows <i>regardless</i> of the setting on the Query security profile (MaxRowsFetched). 0 returns the maximum number of rows allowed by the Query security profile. >0 is the limit on the number of rows.

The values for *OutputFormat* can be as follows:

Numeric Value	Constant Value	Description
2	%Query_PDF	The output is in PDF format.
5	%Query_HTML	The output is in HTML format.
8	%Query_XLS	The output for Excel in HTML format.
14	%Query_TXT	The output for txt in CSV format.
17	%Query_XML_WebRowset	The output is in web rowset XML format.
20	%Query_XML_XmlP	The output is in XMLP format.

Returns

Returns 0 if successful.

Example

To run a query using the query API RunToFile method:

1. Open the query.

```
&aRunQry = %Session.GetQuery();  
  
&aRunQry.Open(&sQryName, False, False);
```

2. Obtain the PromptRecord for the query.

```
&aQryPromptRec = &aRunQry.PromptRecord;
```

This instance of the PromptRecord can be passed to the PeopleCode Prompt function to prompt the user for the runtime values, as follows:

```
&nResult = Prompt(&strQryName | " Prompts", "", &aQryPromptRec);
```

3. Run the query.

Now that you have the runtime values, the query can be run, as follows:

```
&aRowSet = &aRunQry.RunToFile(&aQryPromptRec, "c:\temp\QueryOutput.html", ⇒  
%Query_PDF, 0);
```

4. Access the data of the rowset.

You can now manipulate the rowset using the data buffer access methods and properties:

```
&aRowSet(&i).GetRecord(1).GetField(&j).Value
```

The following is a complete sample code example:

```
Local Rowset &aRowSet;  
Local Row &aRow;  
Local Record &aQryPromptRec;  
Local Record &aRec;  
Local ApiObject &aRunQry;  
&strHTML = "";  
&aRunQry = %Session.GetQuery();  
If (&aRunQry.Open(&sQryName, False, False) <> 0) Then  
    &strHTML = "Error in opening query";  
Else  
    &aQryPromptRec = &aRunQry.PromptRecord;  
    &strQryName = &aRunQry.Name;  
    If &aQryPromptRec <> Null Then  
        &nResult = Prompt(&strQryName | " Prompts", "", &aQryPromptRec);  
    End-If;  
    If (&aRunQry.RunToFile(&aQryPromptRec, "c:\temp\" | ⇒  
    &aRunQry.Name, 3, 0) = 0) Then  
        &strHTML = "Resultset saved into file successfully.";
```

```
Else
    &strHTML = "Failed to save Resultset into file.";
End-If;
End-If;
```

Related Topics

- Application Designer Developer's Guide: Understanding Style Sheets and Style Classes
- [RunToRowset method: Query class](#)
- [PromptRecord property: Query class](#)
- PeopleCode Language Reference: Prompt function
- PeopleCode Developer's Guide: Understanding Data Buffer Access

RunToRowset method: Query class

Syntax

```
RunToRowset(&PromptRecord, MaxRows)
```

Description

Use the RunToRowset method to execute the Query and return the result to a rowset. The query should be an existing query in the database, or it should have been saved using the Save method.

Because a Query may have runtime prompts (that is, criteria defined using Prompt), this method requires those values to be passed in when you execute this method. *PromptRecord* is a PeopleCode record object containing the prompt values as fields in the record. The PromptRecord property can be used to obtain this object.

Parameters

Parameter	Description
<i>&PromptRecord</i>	Specify an instance of a PeopleCode record that contains the runtime prompts and values required for running the query.
<i>MaxRows</i>	Specify the maximum number of rows to be fetched. This parameter takes a numeric value. The total number of rows fetched is the minimum value of this parameter's value, and the application server configuration parameter Max Fetch Size (which is specified in KB.) The values are: • -1 returns all rows <i>regardless</i> of the setting on the Query security profile (MaxRowsFetched). • 0 returns the maximum number of rows allowed by the Query security profile. • >0 is the limit on the number of rows.

Returns

If successful, the query result is returned as a populated PeopleCode rowset. If the query wasn't successful, the method returns NULL. If unsuccessful, check the PSMessages collection for errors.

Example

To run a query using the query API RunToRowset method:

1. Open the Query.

```
&aRunQry = %Session.GetQuery();

&aRunQry.Open(&sQryName, False, False);
```

2. Get the PromptRecord for the Query.

```
&aQryPromptRec = &aRunQry.PromptRecord;
```

This instance of the PromptRecord can be passed to the PeopleCode Prompt function to prompt the user for the runtime values, as follows:

```
&nResult = Prompt(&strQryName | " Prompts", "", &aQryPromptRec);
```

3. Run the query.

Now that you have the prompt values, you can run the query:

```
&aRowSet = &aRunQry.RunToRowset(&aQryPromptRec, 0);
```

4. Access the data of the rowset.

You can now manipulate the rowset using the data buffer access methods and properties:

```
&aRowSet(&i).GetRecord(1).GetField(&j).Value
```

The following is a complete sample code example:

```
Local Rowset &aRowSet;
Local Row &aRow;
Local Record &aQryPromptRec;
Local Record &aRec;
Local ApiObject &aRunQry;
&strHTML = "";
&aRunQry = %Session.GetQuery();
If (&aRunQry.Open(&sQryName, False, False) <> 0) Then
    &strHTML = "Error in opening query";
Else
    &aQryPromptRec = &aRunQry.PromptRecord;
    &strQryName = &aRunQry.Name;
If &aQryPromptRec <> Null Then
    &nResult = Prompt(&strQryName | " Prompts", "", &aQryPromptRec);
    &aRowSet = &aRunQry.RunToRowset(&aQryPromptRec, 0);
    If &aRowSet <> Null Then
        &strHTML = &strHTML | "<table cellpadding='2' =>
```

```

cellspacing='0' width='90%';
    &aRec = &aRowSet(1).GetRecord(1);
    &QrySelOutputFldCol = &aRunQry.QuerySelect.QueryOutputFields;
    If &QrySelOutputFldCol <> Null Then
        &strHTML = &strHTML | "<TR><TD>";
        &strHTML = &strHTML | "<table border='1' cellpadding='2'⇒
cellspacing='0' width='100%';
        &strHTML = &strHTML | "<TR><TH>&nbsp;</TH>";
        For &j = 1 To &QrySelOutputFldCol.count
            &strHTML = &strHTML | "<TH><B>" |
&QrySelOutputFldCol.Item⇒
(&j).LongName | "</B></TH>";
        End-For;
        &strHTML = &strHTML | "</TR>";
        &strHTML = &strHTML | "</TD></TR>";
    End-If;
    &strHTML = &strHTML | "<TR><TD>";
    If &aRowSet.RowCount > 0 Then
        For &i = 1 To &aRowSet.RowCount
            &aRow = &aRowSet(&i);
            &strHTML = &strHTML | "<TR>" | "<TD>" | &i | "</TD>";
            For &j = 1 To &aRow.GetRecord(1).FieldCount
                &strHTML = &strHTML | "<TD>" |
&aRow.GetRecord(1).GetField⇒
(&j).Value | "</TD>";
            End-For;
            &strHTML = &strHTML | "</TR>";
        End-For;
    Else
        &strHTML = &strHTML | "No records retrieved.";
    End-If;
    &strHTML = &strHTML | "</TD></TR>";
    &strHTML = &strHTML | "</TABLE>";
    &strHTML = &strHTML | "</TABLE>";
Else
    &strHTML = "Failed to retrieve result set.";
End-If;
End-If;
End-If;

```

Related Topics

- [RunToFile method: Query class](#)
- [PromptRecord property: Query class](#)
- PeopleCode Language Reference: Prompt function
- PeopleCode Developer's Guide: Understanding Data Buffer Access

RunToString method: Query class

Syntax

```
RunToString(&PromptRecord, ChunkSize, OutputFormat, MaxRows)
```

Description

Use the `RunToString` method to execute the query and return the result as a formatted string.

When “chunking” is active, `RunToString` is intended to be called in a recursive fashion until the result set has been completely traversed. A Boolean property, `MoreRowsAvailable`, is included in the `Query` class to control recursive execution of this method.

See [MoreRowsAvailable property: Query class](#).

Parameters

Parameter	Description
<i>&PromptRecord</i>	Specify an instance of a <code>PeopleCode</code> record that contains the runtime prompts and values required for running the query.
<i>ChunkSize</i>	Specify the desired chunking size in characters as a number. 0 means no chunking.
<i>OutputFormat</i>	Specify the format of the data being written to the file. You can use either a constant or a numeric value for this parameter. See below.
<i>MaxRows</i>	Specify the maximum number of rows to be fetched. This parameter takes a numeric value. The values are: • -1 returns all rows regardless of the setting on the query security profile (<code>MaxRowsFetched</code>). • 0 returns the maximum number of rows allowed by the query security profile. • >0 is the absolute limit on the number of rows.

The values for *Output_Format* can be as follows:

Numeric Value	Constant Value	Description
2	<code>%Query_PDF</code>	The output is in PDF format.
5	<code>%Query_HTML</code>	The output is in HTML format.
8	<code>%Query_XLS</code>	The output for Excel in HTML format.
14	<code>%Query_TXT</code>	The output for text in CSV format.
17	<code>%Query_XML_WebRowset</code>	The output is in web rowset XML format.
20	<code>%Query_XML_XmlP</code>	The output is in XMLP format.

Returns

A string containing the formatted output. If an error occurs, an empty string will be returned.

If there are no errors, but no data is in the query result set, the string will have system-defined header and footer information, but no rows will be present.

Example

The following example runs a query without chunking.

```

&queryname = "XRFWIN";

rem &querytype = %Query_XLS;
rem &querytype = %Query_PDF;
rem &querytype = %Query_HTML;
rem &querytype = %Query_TXT;
&querytype = %Query_XML_XmlP;
rem &querytype = %Query_XML_WebRowset;
&aRunQry = %Session.GetQuery();
If (&aRunQry.Open(&queryname, False, False) <> 0) Then
    MessageBox(0, "", 0, 0, "Error opening query");
Else
    &QryPromptRec = &aRunQry.PromptRecord;
    &chunksize = 0;
    &filename = "C:\QueryWork850\output\" | &querytype | "_runtostring.xml";
    &resultString = &aRunQry.RunToString(&QryPromptRec, &chunksize,
&querytype, 0);
    &myfile = GetFile(&filename, "w", "UTF8", %FilePath_Absolute);
    &myfile.writestring(&resultString);
    &myfile.close();
    MessageBox(0, "", 0, 0, "Success!");
End-If;

```

The following example runs a query with chunking.

```

&queryname = "XRFWIN";
rem &querytype = %Query_XLS;
rem &querytype = %Query_PDF;
rem &querytype = %Query_HTML;
rem &querytype = %Query_TXT;
&querytype = %Query_XML_XmlP;
rem &querytype = %Query_XML_WebRowset;
&aRunQry = %Session.GetQuery();
If (&aRunQry.Open(&queryname, False, False) <> 0) Then
    MessageBox(0, "", 0, 0, "Error opening query");
Else
    &QryPromptRec = &aRunQry.PromptRecord;
    &counter = 0;
    &chunksize = 1000;
    Repeat
        &counter = &counter + 1;
        &filename = "C:\QueryWork850\output\" | &querytype | &counter | ⇒
        "_runtostring.xml";

        &resultString = &aRunQry.RunToString(&QryPromptRec, &chunksize, ⇒
&querytype, 0);
        If (Len(&resultString) > 0) Then
            &myfile = GetFile(&filename, "w", "UTF8", %FilePath_Absolute);
            &myfile.writestring(&resultString);
            &myfile.close();
        Else

```

```
/* edge condition; if there are no more rows AND the */  
/* returned string is empty this is not an error.    */  
If (&aRunQry.MoreRowsAvailable) Then  
    /* we have an error... Yikes! */  
    MessageBox(0, "", 0, 0, "Something bad has happened!");  
Else  
    /* no worries, just ignore it */  
End-If;  
End-If  
Until (Not &aRunQry.MoreRowsAvailable);  
MessageBox(0, "", 0, 0, "Success!");  
End-If;
```

Related Topics

- [MoreRowsAvailable property: Query class](#)

Save method: Query class

Syntax

Save()

Description

The Save method writes any changes to the existing query to the database.

The Save method can be used only on an open query, not on a closed query. This means you must have opened the query with the Open method before you can save it.

The query object remains open after executing Save. You must execute the Close method on the object before it is closed and the memory freed.

① Note

If you're calling the query API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

Parameters

None.

Returns

An integer value: 0 means the query was saved successfully.

Related Topics

- [Open method: Query class](#)
- [Close method: Query class](#)

SetTrackingURL method: Query class

Syntax

`SetTrackingURL(ExpressionText, ExpressionNumber)`

Description

Use the `SetTrackingURL` method to re-establish the drilling URL if the current execution context is different from the context in which the drilling URL was initially set.

For example, a drilling URL is set as a query expression by the program that executes the query. After query execution, a different program—an iScript program—allows the user to download the query results to an Excel spreadsheet. This iScript program needs to include the drilling URL in the spreadsheet data. In order for the iScript program to have access to the drilling URL query expression values, these values must be defined as global objects by the program that executes the query. Then, the iScript program can re-establish the drilling URL by calling the `SetTrackingURL` method.

Parameters

Parameter	Description
<i>ExpressionText</i>	Specify the drilling URL as a string by reference to an established query expression.
<i>ExpressionNumber</i>	Specify the drilling URL as a numeric value by reference to an established query expression.

Returns

None.

Example

```
If &rsURLList <> Null And
    &rsURLList.ActiveRowCount >= 1 And
    All(&rsURLList(1).QRY_URL_WRK.QRYCRIT1EXPRTTEXT.Value) Then
    For &nCount = 1 To &rsURLList.ActiveRowCount;
        &rRecordExpr = &rsURLList(&nCount).QRY_URL_WRK;
        &QryObj.SetTrackingURL(&rRecordExpr.QRYCRIT1EXPRTTEXT.Value, =>
&rRecordExpr.QRYCRIT1EXPRNUM.Value);
    End-For;
End-If;
```

Related Topics

- [AddTrackingURL method: Query class](#)
- [Setting a Drilling URL](#)

A *drilling* URL provides a clickable link in query results allowing a user to drill from the query results to another query, to another component, or to an external site. A drilling URL is defined as a special type of query expression. Like other query expressions, the user can set the drilling URL on the Edit Expression Properties page, or the drilling URL can be set in a PeopleCode program as follows:

- [Query: Defining Query Drilling URLs](#)

Query Class Properties

In the following section, we discuss each Query class property.

Approved property: Query class

Description

This property returns a string indicating whether a query is approved, unapproved, or modified. This is useful for query administration. The values are:

Value	Description
U	Query is unapproved. This is the default value. The query administrator can prevent execution of unapproved queries.
A	Query has been approved by the query administrator.
M	Query has been modified.

This property is read/write.

ApproveOprId property: Query class

Description

Note

This property has been desupported, and remains for backward compatibility only. Use the ApproveUserId property instead.

This property returns a string containing the user ID of the user who approved the query. This can be useful for query administration.

This property is read/write.

Related Topics

- [ApproveUserId property: Query class](#)

ApproveUserId property: Query class

Description

This property returns a string containing the user ID of the user who approved the query. This can be useful for query administration.

This property is read/write.

ApproveDtTm property: Query class

Description

This property returns the date-time stamp when the query was most recently approved. This can be useful for query administration.

This property is read-only.

CreateOprId property: Query class

Description

Note

This property has been desupported, and remains for backward compatibility only. Use the CreateUserId property instead.

This property returns a string containing the User Id of the user who created the query. This can be useful for query administration.

This property is read-only.

Related Topics

- [CreateUserId property: Query class](#)

CreateDtTm property: Query class

Description

This property returns a string containing the date-time stamp indicating when the query was created. This property is set by the query runtime when a new query is saved. This can be useful for query administration.

This property is read-only.

CreateUserId property: Query class

Description

This property returns a string containing the User Id of the user who created the query. This can be useful for query administration.

This property is read-only.

Description property: Query class

Description

This property returns or sets the short description for the query.

The length of this property is 30 characters.

This property is read/write.

Disabled property: Query class

Description

This property indicates if the query is active or not. This property returns a string value:

Value	Description
Y	This query is not active
Blank or any other value	This query is active

This property is read/write.

ExecAppName property: Query class

Description

This property specifies the name of the application executing the query. This property isn't required. This means this property is used only if the query will be executed. This name is stored in the query execution log. This property returns a blank value when the query is opened.

When executing a query using the query API, this property should be set to the Application name that's executing it, so that the Query Monitor can track query execution. Doing this makes this property useful for query administration. If you try to read this property before setting it, you receive a NULL string.

This property should be set before using RunToRowset or RunToFile.

This property is read/write. However, this property is generally used only to set the name, rather than to read it.

ExecLogging property: Query class

Description

This property indicates whether an execution log should be created when the query is executed. This can be useful for query administration. This property takes a Boolean value: True, create a log, False, don't create one.

The execution log, which is created by setting this property, can be viewed from the Query Monitor. The logging is done in a PeopleSoft Table. It stores, along with other relevant information, the Execution DateTime, Total Execution Time for the query, and Total Fetch Time for the query.

If you try to read this property before setting it, you receive a NULL string.

This property is read/write. However, this property is generally used only to set logging, rather than read.

Folder property: Query class

Description

This property is used to group queries together. This parameter takes a string value, up to 18 characters.

This property is read/write.

LastSQLErrorCode property: Query class

Description

This property returns the last SQL error code returned by the database as a number. The session object contains the error text and any other errors encountered while executing the query.

PeopleSoft recommends checking this value after using RunToRowset or RunToFile.

This property is read-only.

LastUpdDttm property: Query class

Description

This property returns the most recent date-time when the query was updated as a string.

This property is read-only.

LastUpdOprId property: Query class

Description

This property returns the User Id of the user who updated the query most recently as a string.

This property is read-only.

LongDescription property: Query class

Description

This property returns or sets the long description for the query.

The length of this property is 256 characters.

This property is read/write.

Metadata property: Query class

Description

This property returns a metadata collection.

This property is read-only.

Example

```
&MetadataList = &MyQuery.Metadata;
```

Related Topics

- [Query Metadata Collection](#)
A Query Metadata collection is returned by the Metadata Query class property.

MetaSQL property: Query class

Description

This property returns the SQL that represents the query, unresolved for any platform.

For example, the MetaSQL property returns the following:

```
SELECT %DATEOUT(A.ASOF_DT)
FROM PS_AEREQUESTTBL A
WHERE A.ASOF_DT = %DATEIN('1900-01-01')
```

This property is read-only.

MoreRowsAvailable property: Query class

Description

This property returns a Boolean value indicating whether “chunking” is turned on for the query.

This property is read-only.

Chunking Considerations

Every time a row is retrieved from the query result set, it is added to the internal output string managed by `RunToString`. At this point, the method can check to see if chunking is active. If so, and if the current size of the output string is larger than the `ChunkSize` parameter, then the query context is stored and the output string is returned. If not, then the next row is retrieved from the result set and the process continues.

When chunking is active, `RunToString` is intended to be called in a recursive fashion until the result set has been completely traversed. A Boolean property, `MoreRowsAvailable`, is included in the Query class to control recursive execution of these methods.

Related Topics

- [RunToString method: Query class](#)

Name property: Query class

Description

This property returns the name of the query as a string.

The length of this property is 30 characters.

This property is read-only.

OutputUnicode property: Query class

Description

Use this property to set or return a Boolean value indicating whether the RunToFile method will create a Unicode-encoded CSV file as output. This property is applicable only if the output format is set to %Query_TXT. Because the default value is false, OutputUnicode must be set before calling RunToFile.

Note

Because Microsoft Excel does not support UTF-8 encoding, the CSV file is written in binary mode with UCS-2 encoded data. Moreover, Excel does not automatically recognize Unicode-encoded, comma-delimited files even if they have a .csv extension. Therefore, the user receiving the file will not be able to open it by double-clicking. Instead, he or she must open it with Excel's File, Open menu and choose the comma delimiter.

This property is read/write.

Example

```
&aQry.OutputUnicode = True;  
&Result = &aQry.RunToFile(&rcdQryPrompts, &sOutFile, %Query_TXT, 0);
```

Related Topics

- [RunToFile method: Query class](#)

PDFFont property: Query class

Description

This property is used to set the PDF Font number required for generating PDF using RunToFile. This property takes either a numeric or constant value. The values are:

Numeric Value	Constant Value	Description
0	%PDFFont_None	Default value
2	%PDFFont_TraditionalChinese	The output must be written using the Traditional Chinese Font.
3	%PDFFont_SimplifiedChinese	The output must be written using the Simplified Chinese Font.
1	%PDFFont_Japanese	The output must be written using the Japanese Font
4	%PDFFont_Korean	The output must be written using the Korean Font

If you try to read this property before setting it, you receive a NULL string.

This property is read/write.

Related Topics

- [RunToFile method: Query class](#)
- [RunToRowset method: Query class](#)

Prompts property: Query class

Description

This property returns all the prompts defined for the Query in a QueryPrompt Collection. If you just want the prompts used in the criteria, use the RuntimePrompts property.

This property is read-only.

Related Topics

- [RuntimePrompts property: Query class](#)
- [QueryPrompt Collection](#)
A QueryPrompt collection is returned from the Prompts and RuntimePrompts Query class properties.

PromptRecord property: Query class

Description

This property returns the runtime prompts of a query as an instance of a PeopleCode record object. This can be used with the Prompt built-in function to prompt for bind values. This record instance can also be used as the first input parameter for the RunToRowset and RunToFile methods.

This property is read-only.

Related Topics

- [RunToFile method: Query class](#)
- [RunToRowset method: Query class](#)

PublicPrivate property: Query class

Description

This property specifies whether the query is public or private.

You can use either a constant or numeric value for this property. The values are:

Numeric Value	Constant Value	Description
0	%Query_Private	The query is a private query.
1	%Query_Public	The query is a public query.

This property is read/write.

Example

```
If &QryObj.PublicPrivate = %Query_Public Then
/* code when working with Public Query */
Else
/* code when working with Private Query */
End-if;
```

QuerySelect property: Query class

Description

This property returns the Main Select (that is, the first select) of the query definition as a QuerySelect object. For a new query which does not have any selects, it returns NULL.

The Query Records, Query Criteria, QueryOutput fields, and QuerySelected Fields can be obtained using the QuerySelect object only. Hence, after opening a query, this property serves as the starting point for getting the different components of the Select statement.

This property is read-only.

Related Topics

- [QuerySelect Class](#)
The QuerySelect class represents the select statement of the SQL used in the query definition. This can be any of the following:

QueryStatistics property: Query class

Description

This property returns statistical information pertaining to the query's execution as a QueryStatistics object.

This property is read-only.

Related Topics

- [QueryStatistics Class](#)
The QueryStatistics class is used to view statistical information about a query's execution. It can be useful for query administration. You can view query statistics for a query before you save it to the database.

RunTimePrompts property: Query class

Description

This property returns the prompts used in the Query Definition's criteria in a QueryPrompt Collection. To return all the prompts defined for the query, use the Prompts property.

This property is read-only.

Related Topics

- [Prompts property: Query class](#)

- [QueryPrompt Collection](#)
A QueryPrompt collection is returned from the Prompts and RuntimePrompts Query class properties.

SQL property: Query class

Description

This property returns the SQL statement as generated from the query definition as a character string.

Note

The value of the SQL property is never stored as part of the query definition. Instead, it's generated by the system whenever it's needed for one of the RunTo methods or for the SQL property.

In the PeopleSoft Query, this is located under the SQL tab.

This property is read-only.

Considerations Using the SQL Property

This property returns a basic SQL statement. This statement does not include logic for doing related language record transactions or translate descriptions. PeopleSoft does not recommend using this SQL for selecting data. Instead, PeopleSoft recommends using the RunToRowset method for selecting data.

Type property: Query class

Description

This property specifies the type of query. This parameter takes either a constant or number value. Values are:

Numeric Value	Constant Value	Description
1	%Query_Query	Query of type Query
3	%Query_View	Query of type View
4	%Query_Role	Role
5	%Query_DBAgent	Process
7	%Query_Archive	Archive

This property is read/write.

QuerySelect Collection

A QuerySelect collection is returned from the QuerySelects property of each QuerySelect instance. It contains the unions and subqueries, which are children of the current select statement. PeopleSoft Query allows unions only for the main select. The QuerySelect instance for any subqueries cannot have any unions.

See [QuerySelects property: QuerySelect class](#).

QuerySelect Collection Methods

In this section, we discuss the QuerySelect collection methods. The methods are discussed in alphabetical order.

AddUnion method: QuerySelect collection

Syntax

```
AddUnion()
```

Description

The AddUnion method adds a new QuerySelect object of type Union in the current QuerySelect collection. You can use AddUnion only with the first QuerySelect Collection because PeopleSoft Query doesn't support Unions for subqueries. All unions are considered children of the Main Select.

Parameters

None.

Returns

A reference to a QuerySelect object if successful. If the current QuerySelect Collection does not belong to the first Select statement, it returns NULL. If it fails, it returns NULL.

Example

```
&QryMainSel = &Query.QuerySelect;  
&QryMainSelCol = &QryMainSel.QuerySelects;  
&QryUnion = &QryMainSelCol.AddUnion();
```

DeleteQuerySelect method: QuerySelect collection

Syntax

```
DeleteQuerySelect(SelNumber)
```

Description

The DeleteQuerySelect method deletes the QuerySelect instance represented *SelNumber*.

Parameters

Parameter	Description
<i>SelNumber</i>	Specify the numeric value containing the Select Number of the QuerySelect that you want to delete.

Returns

Returns 0 if successful.

Example

```
&QryMainSel = &Query.QuerySelect;  
&QryMainSelCol = &QryMainSel.QuerySelects;  
&QryMainSelCol.DeleteQuerySelect(3);
```

First method: QuerySelect collection

Syntax

First()

Description

The First method returns the first child QuerySelect object in the current QuerySelect's collection.

Parameters

None.

Returns

A reference to a QuerySelect object if successful, NULL otherwise.

Example

```
&MyChildQrySel = &MySelCollection.First();
```

Item method: QuerySelect collection

Syntax

Item(*number*)

Description

The Item method returns the QuerySelect object that exists at the *number* position in the current QuerySelect collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QuerySelect object that you want returned.

Returns

A reference to a QuerySelect object if successful, NULL otherwise.

Example

```
For &I = 1 to &QrySelCol.Count;  
    &MyChildQrySel = &QrySelCol.Item(&I);  
    /* do processing */  
End-For;
```

ItemBySelNum method: QuerySelect collection

Syntax

ItemBySelNum(*SelNumber*)

Description

The ItemBySelNum method returns the QuerySelect object specified by *the Select Number*. Each Select Statement in a Query Definition is identified by a unique select number.

Parameters

Parameter	Description
<i>SelNumber</i>	Specify the numeric value of the Select Number.

Returns

A reference to a QuerySelect object if successful, NULL otherwise.

Example

```
&MyChildQuerySelect = &MySelCol.ItemBySelNum(3);
```

Next method: QuerySelect collection

Syntax

Next()

Description

The Next method returns the next QuerySelect object in the current QuerySelect collection. You can use this method only after you have used the First method: otherwise the system returns a NULL.

Parameters

None.

Returns

A reference to a QuerySelect object if successful, NULL otherwise.

Example

```
&MyChildQuerySelect = &MySelCol.Next();
```

QuerySelect Collection Property

In this section, we discuss the Count property.

Count property: QuerySelect collection

Description

This property returns the total number of QuerySelect objects in the current QuerySelect Collection, as a number.

This property is read-only.

Example

```
&COUNTCHILDSELS = &MYSELCOL.Count;
```

QuerySelect Class

The QuerySelect class represents the select statement of the SQL used in the query definition. This can be any of the following:

- The main select statement.
- The select statement in each union.
- The select statement in each subquery.

Consider the following SQL statement:

```
select ACCOUNT_NUM from GL_ACCOUNT_TBL_00

where PRODUCT_ID in (select DISTINCT PRODUCT_ID FROM ORDER_TBL)

union

select ACCOUNT_NUM from GL_ACCOUNT_TBL_01
```

In this example, there are three select statements. The first select statement is the main statement. The second select statement is a subquery, which is then used in the criterion for the first select statement. The union contains the third select statement. There are records and fields associated with each select statement. In the query API, the first select is accessible using Query.QuerySelect, which can be obtained as shown:

```
&MainSelect = &Qry.QuerySelect;
```

The union can be obtained from the main select, as shown:

```
/* There can be more than one union, hence there is collection of selects */  
/* in the main select */  
  
&Union1 = &MainSelect.QuerySelects.Item(1);
```

The subquery is obtained from the main select as shown:

```
/* belongs to first criteria of the select */  
  
&SubQry1 = &MainSelect.Criteria.Item(1).Expr2SubQuery;
```

Therefore, there is one QuerySelect instance for the main select of the query, one instance per union defined in the query, and one instance per subquery.

In PeopleSoft Query, the first select (that is, the main select) is the parent of all the unions and subqueries. The main select is obtained with the QuerySelect property. The unions and subqueries are obtained from the QuerySelects property of each QuerySelect instance.

A QuerySelect object is returned from the following:

- The QuerySelect collection methods AddUnion, First, Item, ItemBySelNum, or Next
- The QuerySelect Query property

See [QuerySelect Collection](#), [QuerySelects property: QuerySelect class](#).

QuerySelect Methods

In this section, we discuss each QuerySelect method. The methods are arranged in alphabetical order.

AddAllFields method: QuerySelect class

Syntax

```
AddAllFields(QueryRecord)
```

Description

The AddAllFields method adds all the fields in the specified query record to the query definition, that is, makes them all QueryOutputFields. The query record must already be a part of the query definition.

Parameters

Parameter	Description
<i>QueryRecord</i>	Specify the instance of an existing record in the query from which you want to add all the fields from to the query definition. This instance can be obtained from the QueryRecords collection of the QuerySelect.

Returns

An integer: 0 if successfully added.

Related Topics

- [AddQueryOutputField method: QuerySelect class](#)
- [AddQueryRecord method: QuerySelect class](#)
- [AddQuerySelectedField method: QuerySelect class](#)

AddCriteria method: QuerySelect class

Syntax

AddCriteria(*Name*)

Description

The AddCriteria method adds new criterion to the query definition. This method returns a reference to a new QueryCriteria object that you can then use to specify details about the criteria.

Note

If you do not specify a unique name for *Name* when adding a criteria, a criteria object referencing the new criteria is returned, not the existing criteria object.

Parameters

Parameter	Description
<i>Name</i>	Specify a string containing the name of the criteria that you want to add. The maximum length of this parameter is 30 characters.

Returns

A reference to a QueryCriteria object.

Related Topics

- [DeleteCriteria method: QuerySelect class](#)
 - [Criteria property: QuerySelect class](#)
 - [QueryCriteria Class](#)
- A QueryCriteria object is returned from the following:

AddExpression method: QuerySelect class

Syntax

AddExpression(*Name*)

Description

The AddExpression method adds an expression to the query definition. It returns a reference to a new QueryExpression object you can use to specify details about the expression.

Parameters

Parameter	Description
<i>Name</i>	Specify a string containing the name of the expression that you want to add. This maximum length of this parameter is 30 characters.

Returns

A reference to a QueryExpression object.

Related Topics

- [FindExpression method: Query class](#)
 - [DeleteExpression method: QuerySelect class](#)
 - [Expressions property: QuerySelect class](#)
 - [QueryExpression Class](#)
- A QueryExpression object is returned by the following:

AddHavingCriteria method: QuerySelect class

Syntax

AddHavingCriteria(*Name*)

Description

The AddHavingCriteria method adds new criterion to the query definition, which is intended for use in the HAVING clause of the SELECT statement. This method returns a reference to a new QueryCriteria object that you can then use to specify details about the having criteria.

Note

If you do not specify a unique name for *Name* when adding a criterion, a criteria object referencing the new criteria is returned, not the existing criteria object.

Parameters

Parameter	Description
<i>Name</i>	Specify a string containing the name of the criteria that you want to add. The maximum length of this parameter is 30 characters.

Returns

A reference to a QueryCriteria object.

Related Topics

- [DeleteHavingCriteria method: QuerySelect class](#)
- [HavingCriteria property: QuerySelect class](#)
- [QueryCriteria Class](#)

A QueryCriteria object is returned from the following:

AddQueryOutputField method: QuerySelect class

Syntax

```
AddQueryOutputField(QueryRecord, index)
```

Description

The AddQueryOutputField method adds a query output field to the query definition. This method returns a reference to a new QueryOutputField object that you can then use to specify attributes for the query definition.

Parameters

Parameter	Description
<i>QueryRecord</i>	Specify the QueryRecord instance that contains the field that you want to include in the query definition. This instance can be obtained from the QueryRecords collection of the QuerySelect.
<i>Index</i>	Specify the numeric position in the QueryRecord of the field that you want to add.

Returns

A reference to a QueryOutputField object.

Related Topics

- [AddAllFields method: QuerySelect class](#)
- [QueryField Class](#)

A QueryField object is returned by the following:

AddQueryRecord method: QuerySelect class

Syntax

```
AddQueryRecord(QueryRecordName)
```

Description

The AddQueryRecord method adds a query record to the query definition. You must specify a valid record name in the string parameter *QueryRecordName*. This method returns a reference to the record as a QueryRecord.

Parameters

Parameter	Description
<i>QueryRecordName</i>	Specify a string containing the name of a record to be added to the query definition. You must specify a valid record name. The maximum allowed length for this parameter is 15 characters.

Returns

A reference to the record as a QueryRecord object.

Related Topics

- [QueryRecord Class](#)
A QueryRecord object is returned from the following:

AddQuerySelectedField method: QuerySelect class

Syntax

AddQuerySelectedField(*QueryRecordName*, *RecordAlias*, *FieldName*, *Heading*)

Description

The AddQuerySelectedField method adds a query field to the query definition, as a QuerySelectedField. This method returns a reference to a new QuerySelectedField object that you can then use to specify attributes for the query definition. At the time it's added, it isn't an output field. This can be changed by setting the column number of the field to a value greater than zero.

Parameters

Parameter	Description
<i>QueryRecordName</i>	Specify the name of the query record to which the field that you want to add belongs.
<i>RecordAlias</i>	Specify the alias of the record (such as A, B, C, and so on.) The length of this parameter is 1.
<i>FieldName</i>	Specify the name of the field that's being added. The maximum allowed length for a field name is 18 characters.
<i>Heading</i>	Specify the heading of the field that's being added. The maximum allowed length for a heading is 30 characters.

Returns

A reference to a QuerySelectedField object.

Related Topics

- [AddAllFields method: QuerySelect class](#)
 - [DeleteField method: QuerySelect class](#)
 - [QueryField Class](#)
- A QueryField object is returned by the following:

DeleteCriteria method: QuerySelect class

Syntax

DeleteCriteria(*index*)

Description

The DeleteCriteria method deletes the criteria specified by *index* from the query definition.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position in the query definition of the criteria that you want to delete.

Returns

An integer: 0 if successfully deleted.

Related Topics

- [AddCriteria method: QuerySelect class](#)
- [Criteria property: QuerySelect class](#)

DeleteExpression method: QuerySelect class

Syntax

DeleteExpression(*index*)

Description

The DeleteExpression method deletes the specified expression from the query definition.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position of the expression in the query definition that you want to delete.

Returns

An integer: 0 if successfully deleted.

Related Topics

- [AddExpression method: QuerySelect class](#)
- [Expressions property: QuerySelect class](#)
- [QueryExpression Class](#)
A QueryExpression object is returned by the following:

DeleteField method: QuerySelect class

Syntax

```
DeleteField(index)
```

Description

The DeleteField method deletes the selected field from the query definition. This does *not* delete the field from the QueryRecord, just from the query definition, so it's no longer selected.

Parameters

Parameter	Description
<i>Index</i>	Specify the position number of the field that you want deleted from the query definition.

Returns

An integer: 0 if successfully deleted.

Related Topics

- [AddAllFields method: QuerySelect class](#)
- [QueryField Class](#)
A QueryField object is returned by the following:

DeleteHavingCriteria method: QuerySelect class

Syntax

```
DeleteHavingCriteria(index)
```

Description

The DeleteHavingCriteria method deletes the having criteria specified by *index* from the query definition.

Parameters

Parameter	Description
<i>Index</i>	Specify the numeric position in the query definition of the having criteria that you want to delete.

Returns

An integer value: 0 means the having criteria was deleted successfully.

Related Topics

- [AddHavingCriteria method: QuerySelect class](#)
- [HavingCriteria property: QuerySelect class](#)

DeleteRecord method: QuerySelect class

Syntax

DeleteRecord(*index*)

Description

The DeleteRecord method deletes the selected record from the query definition. This does *not* delete the record from the database or the QueryDBRecord collection, just from the query definition, so it's no longer selected.

Parameters

Parameter	Description
<i>Index</i>	Specify the position number of the record you want deleted from the query definition.

Returns

An integer: 0 if successfully deleted.

Related Topics

- [AddQueryRecord method: QuerySelect class](#)
- [QueryField Class](#)
A QueryField object is returned by the following:

QuerySelect Properties

In this section, we discuss the QuerySelect properties. The properties are discussed in alphabetical order.

Criteria property: QuerySelect class

Description

This property returns a reference to a QueryCriteria Collection for the simple criteria of the SELECT (that is, the criteria that are used in the where clause of the select statement.)

This property is read-only.

Related Topics

- [QueryCriteria Collection](#)
A QueryCriteria collection is returned from the Criteria QuerySelect class property.

Distinct property: QuerySelect class

Description

This property specifies if the Select is distinct or not.

This property takes a Boolean value: True if the query is distinct, False if the query isn't distinct.

This property is read/write.

Expressions property: QuerySelect class

Description

This property returns a reference to a QueryExpression Collection.

This property is read-only.

Related Topics

- [QueryExpression Collection](#)
A QueryExpression Collection is returned from the Expressions Query class property.

HavingCriteria property: QuerySelect class

Description

This property returns a reference to a QueryCriteria collection populated with Having criteria.

This property is read-only.

Related Topics

- [QueryCriteria Collection](#)
A QueryCriteria collection is returned from the Criteria QuerySelect class property.

ParentSelectNum property: QuerySelect class

Description

This property returns the select number of the parent select of the current select object. Every QuerySelect is assigned a unique number indicating its place in the hierarchy of select

statements. For the Main Select, this number is zero. For unions, this number is 1 (unions aren't allowed in subqueries.)

This property is read-only.

QueryOutputFields property: QuerySelect class

Description

This property returns a reference to a QueryField Collection made up of QueryOutputFields.

The collection of QueryOutputFields does *not* necessarily include all columns returned in query resultset. This collection only includes columns that have been added to query output collection using the query classes or by an end-user designing a query.

PeopleSoft Query can also add additional columns for related language processing and also for translate labels on fields, and so you cannot use the Query Output Collections as a way to discover all of the columns that are returned in the resultset or by executing the SQL generated from a query.

This is property is read-only.

Related Topics

- [QueryField Collection](#)
A QueryField collection is returned from the following:

QueryRecords property: QuerySelect class

Description

This property returns a reference to a QueryRecord Collection for the query.

This is property is read-only.

Related Topics

- [QueryRecord Collection](#)
A QueryRecord collection is returned from the QueryRecords QuerySelect class method.

QuerySelectedFields property: QuerySelect class

Description

This property returns a reference to a QueryField Collection made up of QuerySelectedFields.

This is property is read-only.

Related Topics

- [QueryField Collection](#)
A QueryField collection is returned from the following:

QuerySelects property: QuerySelect class

Description

This property returns all the QuerySelect objects that are children of the current select statement as a QuerySelect collection. If the query contains unions, this property contains

unions and subqueries (if any criteria contain subqueries). For all other selects, this property contains only the subqueries (because PeopleSoft Query doesn't allow unions for sub-queries).

This property is read-only.

Related Topics

- [QuerySelect Collection](#)
A QuerySelect collection is returned from the QuerySelects property of each QuerySelect instance. It contains the unions and subqueries, which are children of the current select statement. PeopleSoft Query allows unions only for the main select. The QuerySelect instance for any subqueries cannot have any unions.

SelectNum property: QuerySelect class

Description

This property returns the select number of the current select. Every QuerySelect is assigned a unique number indicating its place in the hierarchy of select statements. For the Main Select, this number would be 1.

This property is read-only.

SelectType property: QuerySelect class

Description

This property specifies what type of select statement. You can check for either a numeric or a constant value. The values are:

Numeric Value	Constant Value	Description
1	%Query_SelectMain	This is the Main Select of the query definition.
2	%Query_SubQuery	This is a subquery in the query definition.
3	%Query_Union	This is a Union in the query definition.

This property is read-only.

QueryRecord Collection

A QueryRecord collection is returned from the QueryRecords QuerySelect class method.

See [QueryRecords property: QuerySelect class](#).

QueryRecord Collection Methods

In this section, we discuss each QueryRecord collection method. The methods are discussed in alphabetical order.

First method: QueryRecord collection

Syntax

```
First()
```

Description

The First method returns the first QueryRecord object in the QueryRecord collection.

Parameters

None.

Returns

A reference to a QueryRecord object if successful, NULL otherwise.

Example

```
&MyQueryRecord = &MyCollection.First();
```

Item method: QueryRecord collection

Syntax

```
Item(number)
```

Description

The Item method returns the QueryRecord object that exists at the *number* position in the QueryRecord collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryRecord object that you want returned.

Returns

A reference to a QueryRecord object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryRecordColl.Count;  
    &MyQueryRecord = &QueryRecordColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByAlias method: QueryRecord collection

Syntax

```
ItemByAlias(Alias)
```

Description

The ItemByAlias method returns the QueryRecord object specified by *Alias*.

Parameters

Parameter	Description
<i>Alias</i>	Specify the record alias (for example, A, B, C, and so on), used in the SQL statement as a TableName alias.

Returns

A reference to a QueryRecord object if successful, NULL otherwise.

Example

```
&MyQueryRecord = &MyCollection.ItemByAlias("A");
```

Next method: QueryRecord collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryRecord object in the QueryRecord collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryRecord object if successful, NULL otherwise.

Example

```
&MyQueryRecord = &MyCollection.Next();
```

QueryRecord Collection Property

In this section, we discuss the Count property.

Count property: QueryRecord collection

Description

This property returns the number of QueryRecord objects in the QueryRecord Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

QueryRecord Class

A QueryRecord object is returned from the following:

- The QueryRecord Collection methods First, Item, ItemByName, or Next.
- The AddQueryRecord QuerySelect class method.
- The QueryRecord QueryField class method.

See [QueryRecord Collection](#), [AddQueryRecord method: QuerySelect class](#), [QueryRecord property: QueryField class](#).

QueryRecord Class Method

In this section, we discuss the GetField method.

GetField method: QueryRecord class

Syntax

```
GetField(Index)
```

Description

The GetField method returns the QueryField object specified by *index* from the QueryRecord collection.

Parameters

Parameter	Description
<i>Index</i>	Specify the number of the field to be accessed.

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
&QryFieldColl = &QryRec.QueryFields;  
For &I = 1 to &QryFieldColl.Count  
    &QryField = &QryRec.GetField(&I);  
    /* do processing */  
End-For;
```

QueryRecord Class Properties

In this section, we discuss each QueryRecord class property. The properties are discussed in alphabetical order.

Description property: QueryRecord class

Description

This property returns the short description of the record as a string.

The length of this property is 30 characters.

This property is read-only.

JoinAlias property: QueryRecord class

Description

This property returns or sets the join record's alias, that is, A, B, C, and so on.

This is applicable in any type of join. The value is a string. The length of this property is 1 character.

This property is read/write.

JoinFieldName property: QueryRecord class

Description

This property returns or sets the join record's field used in the join criteria. This is applicable in lookup-table joins. The value is a string.

The length of this property is 18 characters.

This property is read/write.

JoinType property: QueryRecord class

Description

This property returns or sets the join type. This is applicable in any type of join. You can use either a constant or numeric value.

The values for the join type are:

Numeric Value	Constant Value	Description
1	%Query_JoinNone	Query record isn't joined with any other record.
2	%Query_JoinHierarchy	Query record has a hierarchy join with another record.
3	%Query_JoinRelated	Query record has a lookup table join with another record.
4	%Query_JoinTree	Query record has a tree join with another record.
5	%Query_JoinLeftOuter	Query record has a left outer join with another record.

This property is read/write.

Name property: QueryRecord class

Description

This property returns the name of the record as a string.

The length of this property is 15 characters.

This property is read-only.

QueryFields property: QueryRecord class

Description

This property returns a reference to a QueryField Collection that contains instances of all the fields belonging to the record definition.

This property is read-only.

Related Topics

- [QueryField Collection](#)
A QueryField collection is returned from the following:

RecordAlias property: QueryRecord class

Description

This property returns the alias used for the record in the query (that is, A, B, C, and so on.)

The length of this property is 1 character.

This property is read/write.

QueryField Collection

A QueryField collection is returned from the following:

- The QueryOutputFields of QuerySelect class method.
- The QuerySelectedFields of QuerySelect class method.
- The QueryFields QueryRecord class method.

The collection of QueryOutputFields does *not* necessarily include all columns returned in query resultset. This collection only includes columns that have been added to query output collection using the query classes or by an end-user designing a query.

PeopleSoft Query can also add additional columns for related language processing and also for translate labels on fields, and so you cannot use the Query Output Collections as a way to discover all of the columns that are returned in the resultset or by executing the SQL generated from a query.

See [QueryOutputFields property: QuerySelect class](#), [QuerySelectedFields](#), [QueryFields property: QueryRecord class](#).

QueryField Collection Methods

In this section, we discuss each QueryField method. The methods are discussed in alphabetical order.

First method: QueryField collection

Syntax

```
First()
```

Description

The First method returns the first QueryField object in the QueryField collection.

Parameters

None.

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
&MyQueryField = &MyCollection.First();
```

Item method: QueryField collection

Syntax

`Item(number)`

Description

The Item method returns the QueryField object that exists at the *number* position in the QueryField collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryField object that you want returned.

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryFieldColl.Count;  
    &MyQueryField = &QueryFieldColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByNameAndAlias method: QueryField collection

Syntax

`ItemByNameAndAlias(Name, RecordAlias)`

Description

The ItemByNameAndAlias method returns the QueryField object with the given *Name* and *Record Alias*.

Parameters

Parameter	Description
Name	Specify the name of an existing QueryField within the QueryField collection. If you specify an invalid name, the object is NULL.
RecordAlias	Alias of the record to which the field belongs

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
&MyQueryField = &MyCollection.ItemByNameAndAlias("PHONELIST", "A");
```

ItemByExpNum method: QueryField collection

Syntax

```
ItemByExpNum(ExpNum)
```

Description

The ItemByExpNum method returns the QueryField object with the given Expression Number, *ExpNum*.

Parameters

Parameter	Description
ExpNum	Expression Number for the given expression field. Non-expression fields have 0 value for the Expression Number.

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
&QryFld = &QryFldCol.ItemByExpNum(1);
```

Next method: QueryField collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryField object in the QueryField collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryField object if successful, NULL otherwise.

Example

```
&MyQueryField = &MyCollection.Next();
```

QueryField Collection Property

In this section, we discuss the Count property.

Count property: QueryField collection

Description

This property returns the number of QueryField objects in the QueryField Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryField Class

A QueryField object is returned by the following:

- The AddQuerySelectedField of QuerySelect class method.
- The AddQueryOutputField of QuerySelect class method.
- The QueryField collection methods First, Item, ItemByName or Next.

See [AddQuerySelectedField method: QuerySelect class](#), [AddQueryOutputField method: QuerySelect class](#).

See [QueryField Collection](#).

QueryField Class Methods

In this section, we discuss each QueryField method. The methods are discussed in alphabetical order.

AddTranslateExpression method: QueryField class

Syntax

```
AddTranslateExpression(ExpressionName)
```

Description

Use the AddTranslateExpression method to add Translate Effective Date Logic expressions for translatable fields.

Parameters

Parameter	Description
<i>ExpressionName</i>	Specify the name of the expression name that you want to add.

Returns

A reference to a QueryExpression object.

Related Topics

- [Expressions property: QuerySelect class](#)
 - [DeleteExpression method: QuerySelect class](#)
 - [AddExpression method: QuerySelect class](#)
 - [AddTranslateField method: QueryField class](#)
 - [QueryExpression Class](#)
- A QueryExpression object is returned by the following:

AddTranslateField method: QueryField class

Syntax

AddTranslateField(*FieldName*)

Description

Use the AddTranslateField method to add a Translate Effective Date Logic field for a translatable field.

Parameters

Parameter	Description
<i>FieldName</i>	Specify the name of the translate field that you want to add. The maximum allowed length of this parameter is 18 characters.

Returns

A reference to a QueryField object.

Related Topics

- [Expressions property: QuerySelect class](#)
 - [DeleteExpression method: QuerySelect class](#)
 - [AddExpression method: QuerySelect class](#)
 - [AddTranslateExpression method: QueryField class](#)
 - [QueryExpression Class](#)
- A QueryExpression object is returned by the following:

GetImageFormat method: QueryField class

Syntax

```
GetImageFormat()
```

Description

Use the GetImageFormat method to differentiate between images and files, both stored as binary large objects (BLOBs) in the database.

Note

Because images and files share the field type value 8, this method is required to differentiate between the two types.

Parameters

None.

Returns

A number. A value 16 indicates that the field is of type file (or attachment).

Related Topics

- [Type property: QueryField class](#)

QueryField Class Properties

In this section, we discuss the QueryField class properties. The properties are discussed in alphabetical order.

Aggregate property: QueryField class

Description

This property returns or sets the aggregate type for the query field.

This property takes either a constant or numeric value. The values are:

Numeric Value	Constant Value	Description
1	%Query_TtlNone	Query field has no total
2	%Query_TtlSum	Query field is for Sum
3	%Query_TtlCount	Query field is for Count
4	%Query_TtlMin	Query field is for Minimum
5	%Query_TtlMax	Query field is for Maximum
6	%Query_TtlAvg	Query field is for Average

This property is read/write.

ColumnNumber property: QueryField class

Description

This property returns or sets the column number for the query field as a number. If the column number is greater than zero, the field is an output field.

This property is read/write.

Description property: QueryField class

Description

This property returns the long description of the field as a string. This same value is returned by the Description property of the QueryDBRecordField class.

The length of this property is 30 characters.

This property is read-only.

Decimal property: QueryField class

Description

This property returns the decimal positions QueryField as a number. This same value is returned by the Decimal property of the QueryDBRecordField class.

This property is read-only.

ExpNum property: QueryField class

Description

This property returns or sets the Expression Number for the field. This value is 0 for non-expression fields. If the field is created for an expression, this value is the same as the expression number of the corresponding expression. This property takes a number value.

This property is read/write.

Flag property: QueryField class

Description

This property returns the Use Edit flag for the Query Field. It has the same values as returned by the Flag property of the QueryDBRecordField. This property takes a number value.

This property is read-only.

Format property: QueryField class

Description

This property returns the field format for the query field. This property returns a string value. This property is useful for displaying the data type in a string format.

Values are:

Data Type	Value Returned
Character	"CHAR "
Long character	"LONG CHAR "
Number	"NUMBER "
Signed number	"SIGNED "
Date	"DATE "
Time	"TIME "
DateTime	"DATE/TIME "
Image	"IMAGE "

This property is read-only.

HeadingText property: QueryField class

Description

This property returns or sets the heading text for the query field as a string.

The length of this property is 30 characters.

This property is read/write.

HeadingType property: QueryField class

Description

This property returns or sets the heading type for the query field. This property takes either a numeric or constant value. The values are:

Numeric Value	Constant Value	Description
1	%Query_HdgNone	Query field has no heading.
2	%Query_HdgText	Query field has a text heading.
3	%Query_HdgRftShort	Query field uses the short RFT heading.
4	%Query_HdgRftLong	Query fields uses the long RFT heading.

This property is read/write.

HeadingUniqueFieldName property: QueryField class

Description

This property returns or sets the unique field name for the heading. The default value for this property is the record alias combined with the field name.

The length of this property is 30 characters.

This property is read/write.

Length property: QueryField class

Description

This property returns the length of the Query Field. The same value is returned by the Length property of the QueryDBRecordField. This property takes a numeric value.

This property is read-only.

LongName property: QueryField class

Description

This property returns the long name of the Query Field. The same value is returned by the Long Name property of the QueryDBRecordField. This property takes a string value.

The length of this property is 30 characters.

This property is read-only.

Name property: QueryField class

Description

This property returns the name of the query field as a string.

The length of this property is 18 characters.

This property is read-only.

OrderByDirection property: QueryField class

Description

This property returns or sets the order by direction. This property takes a numeric value. The constants are the ASCII codes for space (" ") and "D".

Values are:

Numeric Value	Constant Value	Description
32	Code(" ")	Ascending
68	Code("D")	Descending

This property is read/write.

Example

The following sets the order by direction to be ascending.

```
&QueryField.OrderByDirection = Code(" ");
```

The following sets the order by direction to be descending.

```
&QueryField.OrderByDirection = Code("D");
```

OrderByNumber property: QueryField class

Description

Use this property to specify whether a field is used as part of an 'Order By' statement in the SQL. The number value of this property indicates which is the first field in the order by statement, which is the second, and so on.

This property is read/write.

Example

To order a query by one field, you must set the OrderByNumber property for the other QueryFields as well, specifying the primary field as 1, the next field as 2, and so on.

```
&QryFld = &MainQrySel.AddQuerySelectedField("PSRECDEFN", "A", "RECNAME", ⇒  
"Record Name");  
&QryFld.ColumnNumber = 1;  
&QryFld.OrderByNumber = 1;
```

```
&QryFld = &MainQrySel.AddQuerySelectedField("PSRECDEFN", "A", "RECDESCR", ⇒  
"Record Descr");  
&QryFld.ColumnNumber = 2;  
&QryFld.OrderByNumber = 2;
```

```
&QryFld = &MainQrySel.AddQuerySelectedField("PSRECDEFN", "A",  
"RELLANGRECNAME", ⇒  
"Record Lang Rec");  
&QryFld.ColumnNumber = 3;  
&QryFld.OrderByNumber = 3;
```

QueryRecord property: QueryField class

Description

This property returns a reference to the QueryRecord containing this QueryField. If the field has no QueryRecord (that is, that this field is an expression field), this property returns NULL.

This property is read-only.

Example

```
&QryRcd = &QryFld.QueryRecord;
```


RecordAlias property: QueryField class

Description

This property returns the record alias for the Query Field as a string. This value is usually a value like "A", "B", and so on. The same value is returned by the RecordAlias property for QueryRecord.

The length of this property is 1 character.

This property is read-only.

ShortName property: QueryField class

Description

This property returns the short name of the Query Field. The same value is returned by the ShortName property for QueryDBRecordField. This property takes a string value.

The length of this property is 15 characters.

This property is read-only.

TranslateEffDtLogic property: QueryField class

Description

This property returns or sets the effective date logic for the QueryField.

The values are:

Numeric Value	Constant Value	Description
1	%Query_ExprCurDt	Current Date
2	%Query_ExprField	Field
3	%Query_Expression	Expression

This property is read/write.

TranslateExpression property: QueryField class

Description

This property returns a reference to an expression object based on a translate field if the Translate Effective Date option refers to an Expression

This property is read-only.

Related Topics

- [QueryExpression Class](#)
A QueryExpression object is returned by the following:

TranslateField property: QueryField class

Description

This property returns a reference to a QueryField object for a translate field if the Translate Effective Date Option refers to a field.

This property is read-only.

Related Topics

- [QueryField Class](#)
A QueryField object is returned by the following:

TranslateOption property: QueryField class

Description

This property returns or sets the translate value for the QueryField. This property takes a numeric or constant value. The values are:

Numeric Value	Constant Value	Description
1	%Query_XlatNone	None
2	%Query_XlatShort	Short
3	%Query_XlatLong	Long

This property is read/write.

Type property: QueryField class

Description

This property returns the type of the field. You can use either a numeric or constant value. The values are:

Numeric Value	Constant Value	Description
0	%FieldType_Char	Character
1	%FieldType_LongChar	Long Character
2	%FieldType_Number	Number
3	%FieldType_SignedNumber	Signed number
4	%FieldType_Date	Date
5	%FieldType_Time	Time
6	%FieldType_DateTime	DateTime
8	%FieldType_Image	Image
8	%FieldType_File	File
9	%FieldType_ImageRef	ImageReference

Note

The Image and File types can be differentiated using the GetImageFormat method of the QueryField class.

This property is read-only.

Related Topics

- [GetImageFormat method: QueryField class](#)

QueryCriteria Collection

A QueryCriteria collection is returned from the Criteria QuerySelect class property.

See [Criteria property: QuerySelect class](#).

QueryCriteria Collection Methods

In this section, we discuss the QueryCriteria collection methods. The methods are discussed in alphabetical order.

First method: QueryCriteria collection

Syntax

First()

Description

The First method returns the first QueryCriteria object in the QueryCriteria collection.

Parameters

None.

Returns

A reference to a QueryCriteria object if successful, NULL otherwise.

Example

```
&MyQueryCriteria = &MyCollection.First();
```

Item method: QueryCriteria collection

Syntax

Item(*number*)

Description

The Item method returns the QueryCriteria object that exists at the *number* position in the QueryCriteria collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryCriteria object that you want returned.

Returns

A reference to a QueryCriteria object if successful, NULL otherwise.

Example

```
For &I = 1 to &MyCollection.Count;  
    &MyQueryCriteria = &MyCollection.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryCriteria collection

Syntax

ItemByName(*CriteriaName*)

Description

The ItemByName method returns the QueryCriteria object that exists with the passed CriteriaName in the QueryCriteria collection.

Parameters

Parameter	Description
<i>CriteriaName</i>	Specify the name of the Criteria to be searched. This name is the same as the one used while creating the criteria using QuerySelect.AddCriteria(CriteriaName).

Returns

A reference to a QueryCriteria object if successful, NULL otherwise.

Example

```
&MyQueryCriteria = &MyCollection.ItemByName("PHONELIST");
```

Next method: QueryCriteria collection

Syntax

`Next()`

Description

The Next method returns the next QueryCriteria object in the QueryCriteria collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryCriteria object if successful, NULL otherwise.

Example

```
&MyQueryCriteria = &MyCollection.Next();
```

QueryCriteria Collection Property

In this section, we discuss the Count property.

Count property: QueryCriteria collection

Description

This property returns the number of QueryCriteria objects in the QueryCriteria Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryCriteria Class

A QueryCriteria object is returned from the following:

- The AddCriteria and AddHavingCriteria QuerySelect class method.
- The First, Item, and Next method of the QueryCriteria Collection.

See [AddCriteria method: QuerySelect class](#), [AddHavingCriteria method: QuerySelect class](#).

See [QueryCriteria Collection](#).

See [Working With Query Criteria and Expressions](#).

See Query: Choosing Selection CriteriaQuery: Defining Criteria.

QueryCriteria Class Methods

In this section, we discuss the QueryCriteria class methods. The methods are discussed in alphabetical order.

AddExpr1Expression method: QueryCriteria class

Syntax

```
AddExpr1Expression()
```

Description

The AddExpr1Expression method returns a reference to a new a QueryExpression object to be used as an expression for Expression 1. You can then use this object to specify details about the expression using the methods and properties of the QueryExpression Class.

Note

You must set the type for Expression 1 using the Expr1Type property before you can use this method.

Parameters

None.

Returns

A reference to a blank QueryExpression object.

Related Topics

- [Expr1Expression property: QueryCriteria class](#)
 - [AddExpr1Field method: QueryCriteria class](#)
 - [Expr1Type property: QueryCriteria class](#)
 - [QueryExpression Class](#)
- A QueryExpression object is returned by the following:

AddExpr1Field method: QueryCriteria class

Syntax

```
AddExpr1Field(QueryRecordAlias, FieldName)
```

Description

The AddExpr1Field method returns a reference to a new a QueryField object to be used as a field for Expression 1. You can then use this object to specify details about the expression using the methods and properties of the QueryField Class.

Note

You must set the type for Expression 1 using the Expr1Type property before you can use this method.

Parameters

Parameter	Description
<i>QueryRecordAlias</i>	Specify the alias of the QueryRecord that contains the QueryField that you want to use.
<i>FieldName</i>	Specify the name of the QueryField in the QueryRecord that you want to use.

Returns

A reference to a blank QueryField object.

Related Topics

- [Expr1Field property: QueryCriteria class](#)
- [AddExpr1Expression method: QueryCriteria class](#)
- [Expr1Type property: QueryCriteria class](#)
- [QueryField Class](#)

A QueryField object is returned by the following:

AddExpr2Expression method: QueryCriteria class

Syntax

```
AddExpr2Expression()
```

Description

The AddExpr2Expression method returns a reference to a new a QueryExpression object to be used as an expression for Expression 2. You can then use this object to specify details about the expression using the methods and properties of the QueryExpression Class.

Parameters

None.

Returns

A reference to a blank QueryExpression object.

Related Topics

- [QueryExpression Class](#)
- A QueryExpression object is returned by the following:

AddExpr2Field1 method: QueryCriteria class

Syntax

```
AddExpr2Field1(QueryRecordAlias, FieldName)
```

Description

Expression 2 has two field expressions because when the Between relational operator is used in a criteria, there can be two expression fields. The AddExpr2Field1 method returns a reference to a new QueryField object to be used as a *field 1* for Expression 2. You can then use this object to specify details about the expression using the methods and properties of the QueryField Class.

Parameters

Parameter	Description
<i>QueryRecordAlias</i>	Specify the alias of the QueryRecord that contains the QueryField that you want to use.
<i>FieldName</i>	Specify the name of the QueryField in the QueryRecord that you want to use.

Returns

A reference to a blank QueryField object.

Related Topics

- [QueryRecord Class](#)
A QueryRecord object is returned from the following:
- [QueryField Class](#)
A QueryField object is returned by the following:

AddExpr2Field2 method: QueryCriteria class

Syntax

```
AddExpr2Field2(QueryRecordAlias, FieldName)
```

Description

Expression 2 has two field expressions because when the Between relational operator is used in a criteria, there can be two expression fields. The AddExpr2Field2 method returns a reference to a new a QueryField object to be used as a *field 2* for Expression 2. You can then use this object to specify details about the expression using the methods and properties of the QueryField Class.

Parameters

Parameter	Description
<i>QueryRecordAlias</i>	Specify the alias of the QueryRecord that contains the QueryField that you want to use.
<i>FieldName</i>	Specify the name of the QueryField in the QueryRecord that you want to use.

Returns

A reference to a blank QueryField object.

Related Topics

- [QueryRecord Class](#)
A QueryRecord object is returned from the following:
- [QueryField Class](#)
A QueryField object is returned by the following:

AddExpr2List method: QueryCriteria class

Syntax

```
AddExpr2List()
```

Description

Expression 2 can have a list of values when the Operator is of type In List (or Not In List). The AddExpr2List method returns a reference to a new QueryList, which can be used to add a list of values to the criteria.

Parameters

None.

Returns

A reference to a blank QueryList object.

Related Topics

- [QueryList Class](#)
A QueryList Class is returned from the Expr2List property and AddExpr2List method of the QueryCriteria Class.

AddExpr2Subquery method: QueryCriteria class

Syntax

```
AddExpr2Subquery()
```

Description

The AddExpr2Subquery method is used to create a subquery for Expression2. This method returns a new QuerySelect object you can use to specify details about the new subquery.

 Warning

The new subquery created with this method replaces any existing subquery (for this criteria), destroying any existing properties or values.

Parameters

None.

Returns

A reference to a new QuerySelect object.

Related Topics

- [QuerySelect Class](#)
The QuerySelect class represents the select statement of the SQL used in the query definition. This can be any of the following:

QueryCriteria Class Properties

In this section, we discuss the QueryCriteria class properties. The properties are discussed in alphabetical order.

Expr1Expression property: QueryCriteria class

Description

This property returns a reference to the QueryExpression object that's used as Expression 1.

This property is valid only when Expression 1 exists as an expression. If you want to add an expression for Expression 1, use the AddExpr1Expression method.

This property is read/write.

Related Topics

- [AddExpr1Expression method: QueryCriteria class](#)

Expr1Field property: QueryCriteria class

Description

This property returns a reference to the QueryField object that's used as Expression 1.

This property is valid only when Expression 1 exists as a field. You can then use the QueryField Class methods and property to manipulate this object.

If you want to add a field for Expression 1, use the AddExpr1Field method.

This property is read-only.

Related Topics

- [QueryField Class](#)
A QueryField object is returned by the following:
- [AddExpr1Field method: QueryCriteria class](#)

Expr1Type property: QueryCriteria class

Description

This property returns or sets the type for Expression 1.

Note

You *must* set the type of expression for every new criteria.

The values are:

Numeric Value	Constant Value	Description
2	%Query_ExprField	Field
3	%Query_Expression	Expression

This property is read/write.

Example

The following is used to test the expression to determine the property to use to retrieve it:

```
&MyExpr1 = &MyCrtColl.Next();  
If &MyExpr1.Expr1Type = %Query_ExprField Then /* Expression is a Field */  
    &OldExpr1Value = &MyExpr1.Expr1Field;  
    /* do processing */  
Else /* Expression 1 is an expression */  
    &OldExpr1Value = &MyExpr1.Expr1Expression;  
    /* Do processing */  
End-if;
```

The following is an example showing how to add a field for Expression 1.

```
/* add a new criteria */  
&MyCriteria = &MyQuery.AddCriteria();  
/* set the type of the first expression to be a field */  
&MyCriteria.Expr1Type = %Query_ExprField;  
/* add the field EMPLID from the ABSENCE_HIST record */  
&MyField = &MyCriteria.AddExpr1Field("A", "EMPLID");
```

Expr2Constant1 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two constants for Expression 2. This property returns or sets the constant value for the first constant for Expression 2. This property takes a string value.

This property is valid only when Expression 2 is defined as a constant.

This property is read/write.

Expr2Constant2 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two constants for Expression 2. This property returns or sets the constant value for the second constant for Expression 2. This property takes a string value.

This property is valid only when Expression 2 is defined as a constant.

This property is read/write.

Expr2Expression1 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two expressions for Expression 2. This property returns a reference to the first QueryExpression object that's used as Expression 2.

This property is valid only when Expression 2 exists as an expression. To add an expression for Expression 2, use the AddExpr2Expression method.

This property is read/write.

Related Topics

- [AddExpr2Expression method: QueryCriteria class](#)

Expr2Expression2 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two expressions for Expression 2. This property returns a reference to the second QueryExpression object that's used as Expression 2.

This property is valid only when Expression 2 exists as an expression. To add an expression for Expression 2, use the AddExpr2Expression method.

This property is read/write.

Related Topics

- [AddExpr2Expression method: QueryCriteria class](#)

Expr2Field1 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two fields for Expression 2. This property returns a reference to the first QueryField object that's used as Expression 2.

This property is only valid when Expression 2 exists as a field. You can then use the QueryField Class methods and property to manipulate this object.

To add a field for Expression 2, use the AddExpr2Field1 method.

This property is read-only.

Related Topics

- [AddExpr2Field1 method: QueryCriteria class](#)
- [QueryField Class](#)
A QueryField object is returned by the following:

Expr2Field2 property: QueryCriteria class

Description

If the Between relational operator is used in the criteria, there can be two fields for Expression 2. This property returns a reference to the second QueryField object that's used as Expression 2.

This property is valid only when Expression 2 exists as a field. You can then use the QueryField Class methods and property to manipulate this object.

To add a field for Expression 2, use the AddExpr2Field2 method.

This property is read-only.

Related Topics

- [AddExpr2Field2 method: QueryCriteria class](#)
- [QueryField Class](#)
A QueryField object is returned by the following:

Expr2List property: QueryCriteria class

Description

This property returns a reference to the QueryList object of Expression 2 that's used when the Operator is of type In List (or Not In List).

This property is read-only.

Expr2Subquery property: QueryCriteria class

Description

This property returns a reference to the QuerySelect object that's used as a subquery for Expression 2.

This property is valid only when Expression 2 exists as a subquery. To add a subquery for Expression 2, use the `AddExpr2Subquery` method.

This property is read-only.

Related Topics

- [AddExpr2Subquery method: QueryCriteria class](#)

Expr2Type property: QueryCriteria class

Description

This property returns or sets the type for Expression 2. The following table lists all of possible values for this property. However, the values for this property are dependent upon the Operator property.

This property is read/write.

See [Operator property: QueryCriteria class](#), [Working With Query Criteria and Expressions](#).

You can use either a constant or numeric value for this property. The values are:

Numeric Value	Constant Value	Description
1	%Query_ExprConstant	Constant
2	%Query_ExprField	Field
3	%Query_ExprExpression	Expression
4	%Query_ExprSubQuery	Subquery
5	%Query_ExprList	List
6	%Query_ExprCurDt	Current date
7	%Query_ExprTree	Tree
8	%Query_ExprBind	Bind
9	%Query_ExprBothConst	The criterion's operator is Between and both values on the right-hand side are constants. (Const-Const)
10	%Query_ExprConstFld	The criterion's operator is Between, the first value on right-hand side is a constant and the second value is a field. (Const-Field)
11	%Query_ExprConstExpr	The criterion's operator is Between, the first value on right-hand side is a constant and the second value is an expression. (Const-Expr)
12	%Query_ExprFieldConst	The criterion's operator is Between, the first value on right-hand side is a field and the second value is a constant. (Field-Const)
13	%Query_ExprBothFld	The criterion's operator is Between and both values on the right-hand side are constants. (Field-Field)

Numeric Value	Constant Value	Description
14	%Query_ExprFldExpr	The criterion's operator is Between, the first value on right-hand side is a field and the second value is an expression. (Field-Expr)
15	%Query_ExprExprConst	The criterion's operator is Between, the first value on right-hand side is an expression and the second value is a constant. (Expr-Const)
16	%Query_ExprExprFld	The criterion's operator is Between, the first value on right-hand side is an expression and the second value is a field. (Expr-Field)
17	%Query_ExprBothExpr	The criterion's operator is Between and both values on the right-hand side are expressions. (Expr-Expr)
18	%Query_ExprTreePrompt	Tree prompt

The following table describes how to access or change Expression 2 depending on the Expression2 Type.

Expression2 Type	Method or Property for Changing the Expression	Method or Property for Accessing the Expression
Constant	Expr2Constant	Expr2Constant
Field	AddExpr2Field()	Expr2Field
Expression	AddExpr2Expression()	Expr2Expression
In List	AddExpr2List	Expr2List
In Tree	AddExpr2Expression	Expr2Expression
Subquery	AddExpr2Subquery()	Expr2Subquery
Const-Const	Expr2Constant, Expr2Constant	Expr2Constant, Expr2Constant
Const-Field	Expr2Constant, AddExpr2Field()	Expr2Constant, Expr2Field
Const-Expr	Expr2Constant, AddExpr2Expression()	Expr2Constant, Expr2Expression
Field-Const	AddExpr2Field(), Expr2Constant	Expr2Field, Expr2Constant
Field-Field	AddExpr2Field(), AddExpr2Field()	Expr2Field, Expr2Field
Field-Expr	AddExpr2Field(), AddExpr2Expression()	Expr2Field, Expr2Expression
Expr-Const	AddExpr2Expression(), Expr2Constant	Expr2Expression, Expr2Constant

Expression2 Type	Method or Property for Changing the Expression	Method or Property for Accessing the Expression
Expr-Field	AddExpr2Expression(), AddExpr2Field()	Expr2Expression, Expr2Field
Expr-Expr	AddExpr2Expression(), AddExpr2Expression()	Expr2Expression, Expr2Expression

Example

The following is used to test the expression to determine the property to use to retrieve it:

```
&MyExpr2 = &MyCriteria.Expr2Expression;  
If &MyExpr2.Expr2Type = %Query_ExprConstant Then /* Expression is a constant  
*/  
    &OldValue = &MyExpr2.Expr2Constant;  
    /* do processing */  
End-if;
```

The following is an example showing how to add a field for Expression 2:

```
( )  
/* After setting the first expression, set the operator for the criteria*/  
&MyCriteria.Operator = %Query_CondEqual;  
  
/* Set the type of the second expression to be a field */  
&MyCriteria.Expr2Type = %Query_ExprField;  
  
/* Add the EMPLID field from the ABSENCE_HIST record whose record alias is A  
*/  
&MyField = &MyCriteria.AddExpr2Field("A", "EMPLID" );
```

Logical property: QueryCriteria class

Description

This property returns or sets the logical portion of a criteria.

Note

This property is valid only when there are more than one criteria for a query. Also, this property is required when there is more than one criteria for a query.

The values are:

Numeric Value	Constant Value	Description
1	%Query_CombAnd	Logical And for non-having criteria
2	%Query_CombOr	Or for non-having criteria

Numeric Value	Constant Value	Description
3	%Query_CombNotUsed	No logical operator. Used for the first non-having criteria.
4	%Query_CombHaveAnd	Logical And for having criteria
5	%Query_CombHaveOr	Logical Or for having Criteria
6	%Query_CombHaveNotUsed	No logical operator. Used for the first having criteria.

This property is read/write.

LParenLvl property: QueryCriteria class

Description

This property returns or sets the left parenthesis level used for grouping criteria. This property takes a numeric value.

This property is read/write.

Name property: QueryCriteria class

Description

This property returns the name of the Query Criteria, as a string.

This property is read-only.

Negation property: QueryCriteria class

Description

This property returns a Boolean value, indicating whether a criterion is negated: True if the criterion is negated, False if it isn't.

This property is read/write.

Operator property: QueryCriteria class

Description

This property returns or sets the operator for the criteria.

The value of this property determines the valid types of the Expression 2, set with the Expr2Type property.

This property is read/write.

See [Expr2Type property: QueryCriteria class](#), [Working With Query Criteria and Expressions](#).

You can use either a constant or numeric value for this property. The values are:

Numeric Value	Constant Value	Description
1	%Query_CondNone	None (used for initializing a new criteria.)
2	%Query_CondEqual	Criteria's left-hand side is equal to right-hand side (= operator)
3	%Query_CondNotEqual	Criteria's left-hand side is not equal to right-hand side (<> operator)
4	%Query_CondGreaterThan	Criteria's left-hand side is greater than right-hand side (> operator)
5	%Query_CondNotGreaterThan	Criteria's left-hand side is not greater than right-hand side (<= operator)
6	%Query_CondLessThan	Criteria's left-hand side is less than right-hand side (< operator)
7	%Query_CondNotLessThan	Criteria's left-hand side is not less than right-hand side (>= operator)
8	%Query_CondInList	Criteria's left-hand side is in the given list (IN operator)
9	%Query_CondNotInList	Criteria's left-hand side is not in the given list (Not IN operator)
10	%Query_CondBetween	Criteria's left-hand side is between the two values of right-hand side (BETWEEN operator)
11	%Query_CondNotBetween	Criteria's left-hand side is not between the two values of right-hand side (BETWEEN operator)
12	%Query_CondExists	Criteria's left-hand side is the output of the subquery of right-hand side (EXISTS operator)
13	%Query_CondNotExists	Criteria's left-hand side doesn't exist in the output of the subquery of right-hand side (NOT EXISTS operator)
14	%Query_CondLike	Criteria's left-hand side is like (wildcard search) the right-hand side (LIKE operation)
15	%Query_CondNotLike	Criteria's left-hand side is not like (wildcard search) the right-hand side (NOT LIKE operation)
16	%Query_CondNull	Criteria's left-hand side is NULL (NULL operation)
17	%Query_CondNotNull	Criteria's left-hand side is not NULL (IS NOT NULL operation)

Numeric Value	Constant Value	Description
18	%Query_CondInTree	Criteria's left-hand side is from a list of nodes in Tree (IN operation)
19	%Query_CondNotInTree	Criteria's left-hand side is not from a list of nodes in Tree (NOT IN operation)
20	%Query_CondEffDtLessEqual	Criteria's left-hand side is an Effective Date and is less than or equal to the date on the right-hand side (<= operation)
21	%Query_CondEffDtGreaterEqual	Criteria's left-hand side is an Effective Date and is greater than or equal to the date on the right-hand side (>= operation)
22	%Query_CondEffDtLess	Criteria's left-hand side is an Effective Date and is less than the date on the right-hand side (< operation)
23	%Query_CondEffDtGreater	Criteria's left-hand side is an Effective Date and is greater than the date on the right-hand side (> operation)
24	%Query_CondFirstEffDt	Criteria's left-hand side is the first effective date (Function MIN())
25	%Query_CondLastEffDt	Criteria's left-hand side is the last effective date (Function MAX())
26	%Query_CondInTreeJoin	Criteria's left-hand side is an In Tree Join.

R1ExprNum property: QueryCriteria class

Description

This property returns or sets the expression number for the first expression of Expression 2. This property takes a numeric value.

This property is read/write.

R2ExprNum property: QueryCriteria class

Description

This property returns or sets the expression number for the second expression of Expression 2. This property takes a numeric value.

This property is read/write.

R1ExprType property: QueryCriteria class

Description

This property returns the expression type for the first expression of Expression 2. This property takes a numeric value and is the same range of values as the Expr2Type. It helps distinguish the type of an expression based on the value of Expr2Type. For instance, if the Expr2Type is Field-Expr, R1Expr2Type is of type Field and R2Expr2Type is of type Expression.

This property is read-only.

R2ExprType property: QueryCriteria class

Description

This property returns the expression type for the second expression of Expression 2. This property takes a numeric value and is the same range of values as the Expr2Type. It helps distinguish the type of an expression based on the value of Expr2Type. For instance, if the Expr2Type is Field-Expr, R1Expr2Type is of type Field and R2Expr2Type is of type Expression.

This property is read-only.

RParenLvl property: QueryCriteria class

Description

This property returns or sets the right parenthesis level used for grouping criteria. This property takes a numeric value.

This property is read/write.

QueryExpression Collection

A QueryExpression Collection is returned from the Expressions Query class property.

See [Expressions property: QuerySelect class](#).

QueryExpression Collection Methods

In this section, we discuss the QueryExpression collection methods. The methods are described in alphabetical order.

First method: QueryExpression collection

Syntax

First()

Description

The First method returns the first QueryExpression object in the QueryExpression collection.

Parameters

None.

Returns

A reference to a QueryExpression object if successful, NULL otherwise.

Example

```
&MyQueryExpression = &MyCollection.First();
```

Item method: QueryExpression collection

Syntax

Item(*number*)

Description

The Item method returns the QueryExpression object that exists at the *number* position in the QueryExpression collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryExpression object that you want returned.

Returns

A reference to a QueryExpression object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryExpressionColl.Count;  
    &MyQueryExpression = &QueryExpressionColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryExpression collection

Syntax

ItemByName(*ExpressionName*)

Description

The ItemByName method returns the QueryExpression object in the QueryExpressionCollection with the given expression name.

Parameters

Parameter	Description
<i>ExpressionName</i>	The name of the required expression.

Returns

A reference to a QueryExpression object if successful, NULL otherwise.

Example

```
&QryExpr = &QryExprCol.Item("Exp-6");
```

Next method: QueryExpression collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryExpression object in the QueryExpression collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryExpression object if successful, NULL otherwise.

Example

```
&MyQueryExpression = &MyCollection.Next();
```

QueryExpression Collection Property

In this section, we discuss the Count property.

Count property: QueryExpression collection

Description

This property returns the number of QueryExpression objects in the QueryExpression Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryExpression Class

A QueryExpression object is returned by the following:

- The AddExpression method of the Query class.
- The First, Item and Next methods of the QueryExpression collection.
- Some of the QueryCriteria class methods.
- The Expr1Expression and Expr2Expression1 properties of the QueryCriteria class.

See [AddExpression method: QuerySelect class](#), [QueryExpression Collection](#), [QueryCriteria Class Methods](#), [Expr1Expression property: QueryCriteria class](#), [Expr2Expression1 property: QueryCriteria class](#).

See [Working With Query Criteria and Expressions](#).

QueryExpression Class Properties

In this section, we discuss the QueryExpression class properties. The properties are discussed in alphabetical order.

Aggregate property: QueryExpression class

Description

This property specifies whether the expression is an aggregate function.

This property takes a Boolean value: True if the expression is an aggregate function, False, otherwise.

This property is read/write.

BindFlag property: QueryExpression class

Description

This property specifies whether the expression contains a bind value, as Boolean value.

This property is mainly used while reading a query, to determine whether a Query Expression contains a bind value. It isn't necessary to set this value while saving a query to the database.

Values are:

Value	Description
False	Expression doesn't have a bind value
True	Expression has a bind value

This property is read/write.

Decimal property: QueryExpression class

Description

This property returns or sets the decimal value of the expression.

This property is only valid with numeric fields.

This property is read/write.

ExpNum property: QueryExpression class

Description

This property returns or sets the unique expression number, as a numeric value.

This property is read/write.

IsXlatExpression property: QueryExpression class

Description

This property indicates whether the expression is for a translate field. This property takes a Boolean value: True, the expression is based on a translated field.

This property is read-only.

Length property: QueryExpression class

Description

This property returns or sets the length of the expression, as a number.

This property is read/write.

Name property: QueryExpression class

Description

This property returns the name of the expression, as a string.

This property is read-only.

OutputField property: QueryExpression class

Description

This property returns the instance of the displayed expression field, as a QueryField. This property returns a NULL when the expression isn't used in a displayed (output) field.

This property is read/write.

RightExprFlag property: QueryExpression class

Description

This property specifies whether an expression is used in the right-hand side of a criteria (that is, is it an Expr2 expression), as a Boolean value.

This property is typically used while reading a query to determine whether a Query Expression is used in the right-hand side of criteria. It's not necessary to set this value while saving a query to the database.

Values are:

Value	Description
False	Expression is not used in the right-hand side of the criteria
True	Expression is used in the right-hand side of the criteria

This property is read/write.

SelectedField property: QueryExpression class

Description

This property returns the instance of the expression field, as a QueryField. This property returns a NULL when the expression is used only in the right-hand side of a criteria.

This property is read/write.

Text property: QueryExpression class

Description

This property returns or sets the text of the expression, as a character string.

This property is read/write.

Using ORACLE Hints in Expressions

Oracle hints can be included in expressions using the following considerations:

- Expression containing a hint must begin with /*+.
- Expression can only contain one hint. For example, only one set of /* */ is allowed in each expression.
- Each /* must precede an */.
- Each expression must contain a complete hint. For example, an expression can't have only /* or */. Both must be in same expression.

Type property: QueryExpression class

Description

This property returns or sets the field type of the expression.

You can specify either a constant or a numeric value. The values are:

Numeric Value	Constant Value	Description
0	%FieldType_Char	Character
1	%FieldType_LongChar	Long Character
2	%FieldType_Number	Number
3	%FieldType_SignedNumber	Signed number
4	%FieldType_Date	Date
5	%FieldType_Time	Time
6	%FieldType_DateTime	DateTime
7	%FieldType_Image	Image
11	%FieldType_URL	Drilling URL

This property is read/write.

QueryList Class

A QueryList Class is returned from the Expr2List property and AddExpr2List method of the QueryCriteria Class.

See [Expr2List property: QueryCriteria class](#), [AddExpr2List method: QueryCriteria class](#).

QueryList Class Methods

In this section, we discuss the QueryList class methods. The methods are discussed in alphabetical order.

AddListValue method: QueryList class

Syntax

AddListValue(*Value*, *IsPrompt*)

Description

The AddListValue method adds a new List Value into the QueryList instance.

Parameters

Parameter	Description
<i>Value</i>	Specify the string value to be added to the list

Parameter	Description
<i>IsPrompt</i>	Specify whether the string specified by <i>Value</i> is a bind variable. This parameter takes a Boolean value: True, <i>Value</i> is a bind variable.

Returns

A reference to a QueryListValue object if successful, NULL otherwise.

Example

```
&MyListValue = &MyList.AddListValue("1", False);
```

First method: QueryList class

Syntax

```
First()
```

Description

The First method returns the first QueryListValue object in the QueryList instance.

Parameters

None.

Returns

A reference to a QueryListValue object if successful, NULL otherwise.

Example

```
&MyListValue = &MyList.First();
```

Item method: QueryList class

Syntax

```
Item(number)
```

Description

The Item method returns the QueryListValue object that exists at the *number* position in the QueryList instance.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the QueryList object that you want returned.

Returns

A reference to a QueryListValue object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryList.Count;  
    &QryListVal = &QueryList.Item(&I);  
    /* do processing */  
End-For;
```

Next method: QueryList class

Syntax

Next()

Description

The Next method returns the next QueryListValue object in the QueryList instance. This method should be called after calling First, else it returns NULL.

Parameters

None.

Returns

A reference to a QueryListValue object if successful, NULL otherwise.

Example

```
&MyNextListValue = &MyList.Next();
```

QueryList Class Property

In this section, we discuss the Count property.

Count property: QueryList class

Description

This property returns the number of QueryListValue objects in the QueryList Collection, as a number.

This property is read-only.

Example

```
&ListValueCount = &MYList.Count;
```

QueryListValue Class

A QueryListValue instance is returned from the AddListValue, First, Item, or Next QueryList Class methods.

See [QueryList Class Methods](#).

QueryListValue Class Properties

In this section, we discuss the QueryListValue class properties. These properties are discussed in alphabetical order.

IsPrompt property: QueryListValue class

Description

This property indicates whether the value is a bind variable (such as :1). This property returns a Boolean value: True, this property is a bind variable.

This property is read-only.

Value property: QueryListValue class

Description

This property returns a string for the value stored in the list.

This property is read-only.

QueryRecordHierarchy Collection

A QueryRecordHierarchy collection is returned from the RecordHierarchy QueryDBRecord property.

The order of each QueryRecordHierarchy object in the collection maps to the order of each tree node as it appears in the tree hierarchy from top to bottom.

See [RecordHierarchy property: QueryDBRecord class](#).

QueryRecordHierarchy Collection Methods

In this section, we discuss the QueryRecordHierarchy collection methods. The methods are discussed in alphabetical order.

First method: QueryRecordHierarchy collection

Syntax

First()

Description

The First method returns the first QueryRecordHierarchy object in the QueryRecordHierarchy collection.

Parameters

None.

Returns

A reference to a QueryRecordHierarchy object if successful, NULL otherwise.

Example

```
&MyQueryRecordHierarchy = &MyCollection.First();
```

Item method: QueryRecordHierarchy collection

Syntax

```
Item(number)
```

Description

The Item method returns the QueryRecordHierarchy object that exists at the *number* position in the QueryRecordHierarchy collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryRecordHierarchy object that you want returned.

Returns

A reference to a QueryRecordHierarchy object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryRecordHierarchyColl.Count;  
    &MyQueryRecordHierarchy = &QueryRecordHierarchyColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryRecordHierarchy collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the QueryRecordHierarchy object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing QueryRecordHierarchy within the QueryRecordHierarchy collection. If you specify an invalid name, the object is NULL.

Returns

A reference to a QueryRecordHierarchy object if successful, NULL otherwise.

Example

```
&MyQueryRecordHierarchy = &MyCollection.ItemByName("PHONELIST");
```

Next method: QueryRecordHierarchy collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryRecordHierarchy object in the QueryRecordHierarchy collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryRecordHierarchy object if successful, NULL otherwise.

Example

```
&MyQueryRecordHierarchy = &MyCollection.Next();
```

QueryRecordHierarchy Collection Property

In this section, we discuss the QueryRecordHierarchy properties. These properties are discussed in alphabetical order.

Count property: QueryRecordHierarchy collection

Description

This property returns the number of QueryRecordHierarchy objects in the QueryRecordHierarchy Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count ;
```

QueryRecordHierarchy Class

A reference to a QueryRecordHierarchy object is returned by the First, Item, ItemByName, and Next QueryRecordHierarchy Collection methods.

Every QueryRecordHierarchy object returned from a collection represents a record node in the Record Hierarchy tree in Query tab of PeopleSoft Query.

The QueryRecordHierarchy object returned from the QueryField represents the prompt table for the record field.

See [QueryRecordHierarchy Collection](#).

QueryRecordHierarchy Class Properties

In this section, we discuss the QueryRecordHierarchy class properties. The properties are discussed in alphabetical order.

Description property: QueryRecordHierarchy class

Description

This property returns a description of the record node as a string.

This property is read-only.

Level property: QueryRecordHierarchy class

Description

This property returns the level of the record node in the record hierarchy. 1 is the root node, 2 is a node beneath the root node, 3 is a child of that, and so on.

This property is read-only.

Name property: QueryRecordHierarchy class

Description

This property returns the name of the record node as a string.

This property is read-only.

ParentFlag property: QueryRecordHierarchy class

Description

This property returns the parent flag. The values are:

Value	Description
0	Record node contains no children nodes.
1	Record node contains children nodes

This property is read-only.

Query Metadata Collection

A Query Metadata collection is returned by the Metadata Query class property.

See [Metadata property: Query class](#).

See [Using Query Metadata](#).

Query Metadata Collection Methods

In this section, we discuss the Query Metadata collection methods. These methods are discussed in alphabetical order.

First method: Query Metadata collection

Syntax

```
First()
```

Description

The First method returns the first Query Metadata object in the Query Metadata collection.

Parameters

None.

Returns

A reference to a Query Metadata object if successful, NULL otherwise.

Example

```
&MyMetadata = &MyCollection.First();
```

Item method: Query Metadata collection

Syntax

`Item(number)`

Description

The Item method returns the Query Metadata object that exists at the *number* position in the Query Metadata collection.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the Query Metadata object that you want returned.

Returns

A reference to a Query Metadata object if successful, NULL otherwise.

Example

```
For &I = 1 to &MetadataColl.Count;  
    &MyMetadata = &MetadataColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: Query Metadata collection

Syntax

`ItemByName(Name)`

Description

The ItemByName method returns the Query Metadata object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing Query Metadata within the Query Metadata collection. If you specify an invalid name, the object is NULL.

Returns

A reference to a Query Metadata object if successful, NULL otherwise.

Example

```
&MyMetadata = &MyQuery.Metadata.ItemByName("Descr");
```

Next method: Query Metadata collection

Syntax

```
Next()
```

Description

The Next method returns the next Query Metadata object in the Query Metadata collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a Query Metadata object if successful, NULL otherwise.

Example

```
&MyMetadata = &MyCollection.Next();
```

Query Metadata Collection Property

In this section, we discuss the Count property.

Count property: Query Metadata collection

Description

This property returns the number of Query Metadata objects in the Query Metadata Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

Query Metadata Class

A Query Metadata object is returned from the Query Metadata Collection methods First, Item, ItemByName, or Next.

See [Query Metadata Collection](#).

See [Using Query Metadata](#).

Query Metadata Class Properties

In this section, we discuss the Query Metadata class properties. The properties are discussed in alphabetical order.

Name property: Query Metadata class

Description

This property returns the name of each Query Metadata property as a string.

Values for this property are:

Value	Description
Descr	Description
LongDescr	Long description
Public/Private	Specifies if the query is public or private. If the query is private, the name of the owner is listed in Value.
LastUpdDttm	Last updated date and time
LastUpdOprId	The UserId of the user who updated the value last
Record	Record name. May be more than one.
Input Param	Input parameter. May be more than one.
Expression	Expression. May be more than one.
Field	Record field name for the output column. May be more than one.
Heading	Heading name for the output column. May be more than one.

This property is read-only.

Value property: Query Metadata class

Description

This property returns the value for the Query Metadata property as a string.

This property is read-only.

QueryStatistics Class

The QueryStatistics class is used to view statistical information about a query's execution. It can be useful for query administration. You can view query statistics for a query before you save it to the database.

A QueryStatistics Class is returned from the QueryStatistics Query property.

See [QueryStatistics property: Query class](#).

QueryStatistics Class Properties

In this section, we discuss the QueryStatistics properties. The properties are discussed in alphabetical order.

AvgExecTime property: QueryStatistics class

Description

This property returns the average execution time for the query as a number.

This property is read-only.

AvgFetchTime property: QueryStatistics class

Description

This property returns the average fetch time for the query as a number.

This property is read-only.

AvgNumRows property: QueryStatistics class

Description

This property returns the average number of rows fetched for the query.

This property is read-only.

ExecCount property: QueryStatistics class

Description

This property returns the total number of times the query has been executed.

This property is read-only.

LastExecDtTm property: QueryStatistics class

Description

This property returns the last date and time the query was executed, as a string.

This property is read-only.

QuerySecurityProfile Class

The QuerySecurityProfile class is used to view the current user's security profile for PeopleSoft Query. This class doesn't contain any methods, and all the properties are read-only. An instance of this class is returned by the GetQuerySecurityProfile Session method.

See [GetQuerySecurityProfile method: Session class](#).

QuerySecurityProfile Class Properties

In this section, we discuss the QuerySecurityProfile properties. The properties are discussed in alphabetical order.

AllowAnyJoin property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to define queries with any join. This property takes a Boolean value: True, the user can define such queries.

This property is read-only.

AllowDistinct property: QuerySecurityProfile class

Description

This property indicates whether the user can define queries with a Distinct clause in a SELECT statement. This property takes a Boolean value: True, the user can define such queries.

This property is read-only.

AllowExpressions property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to define expressions in queries. This property takes a Boolean value: True, the user can define such queries.

This property is read-only.

AllowSubqueries property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to define criteria containing subqueries. This property takes a Boolean value: True, the user can define such queries.

This property is read-only.

AllowUnions property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to define queries containing unions. This property takes a Boolean value: True, the user can define such queries.

This property is read-only.

ApprovePrivateQuery property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to approve private queries. This property takes a Boolean value: True, the user can approve such queries. This property is meant for query administration.

This property is read-only.

ApprovePublicQuery property: QuerySecurityProfile class

Description

This property indicates whether the user is allowed to approve public queries. This property takes a Boolean value: True, the user can approve such queries. This property is meant for query administration.

This property is read-only.

CanCreatePublic property: QuerySecurityProfile class

Description

This property indicates whether the user can create public queries. This property takes a Boolean value: True, the user can create such queries.

This property is read-only.

CanCreateWorkFlow property: QuerySecurityProfile class

Description

This property indicates whether the user can create or run any workflow queries. Workflow queries are of the following types:

- Archive
- Process
- Role

This property takes a Boolean value: True, the user can create such queries.

This property is read-only.

CanModifyQuery property: QuerySecurityProfile class

Description

This property indicates whether the user can modify queries. This property takes a Boolean value: True, the user can modify queries.

This property is read-only.

CanRunQuery property: QuerySecurityProfile class

Description

This property indicates whether the user can run queries. This property takes a Boolean value: True, the user can run queries.

This property is read-only.

CanRunToExcel property: QuerySecurityProfile class

Description

This property indicates whether the user can run queries to an Excel spreadsheet. This property takes a Boolean value: True, the user can run queries.

This property is read-only.

LimitUnapproved property: QuerySecurityProfile class

Description

This property indicates whether there is a limit on the number of rows returned for unapproved queries. This property is meant for query administration. This property takes a Boolean value: True, limit the number of rows. The MaxUnapprovedRows property is active only if this property is specified as True.

This property is read-only.

Related Topics

- [MaxUnapprovedRows property: QuerySecurityProfile class](#)

MaxInTreeCriteria property: QuerySecurityProfile class

Description

This property indicates the maximum number of In Tree Criteria that can be used in the queries defined by the current user. This property takes a numeric value.

This property is read-only.

MaxJoins property: QuerySecurityProfile class

Description

This property indicates the maximum number of joins allowed in the queries defined by the current user. This property takes a numeric value.

This property is read-only.

MaxRowsToFetch property: QuerySecurityProfile class

Description

This property indicates the maximum number of rows to fetch for the current user when a query is executed. This property takes a numeric value.

This property is read-only.

MaxUnapprovedRows property: QuerySecurityProfile class

Description

This property indicates the maximum number of rows that can be returned for unapproved queries. This property takes a numeric value. This property is meant for query administration. This property is active only if the property LimitUnapproved is True.

This property is read-only.

Related Topics

- [LimitUnapproved property: QuerySecurityProfile class](#)

QueryDBRecord Collection

A QueryDBRecord collection is returned from the FindQueryDBRecords session method.

See [FindQueryDBRecords method: Session class](#).

QueryDBRecord Collection Methods

In this section, we discuss the QueryDBRecord collection methods. The methods are discussed in alphabetical order.

First method: QueryDBRecord collection

Syntax

```
First()
```

Description

The First method returns the first QueryDBRecord object in the QueryDBRecord collection.

Parameters

None.

Returns

A reference to a QueryDBRecord object if successful, NULL otherwise.

Example

```
&MyQueryDBRecord = &MyCollection.First();
```

Item method: QueryDBRecord collection

Syntax

```
Item(number)
```

Description

The Item method returns the QueryDBRecord object that exists at the *number* position in the QueryDBRecord collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryDBRecord object that you want returned.

Returns

A reference to a QueryDBRecord object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryDBRecordColl.Count;  
    &MyQueryDBRecord = &QueryDBRecordColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryDBRecord collection

Syntax

```
ItemByName(Name)
```

Description

The ItemByName method returns the QueryDBRecord object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing QueryDBRecord within the QueryDBRecord collection. If you specify an invalid name, the object is NULL.

Returns

A reference to a QueryDBRecord object if successful, NULL otherwise.

Example

```
&MyQueryDBRecord = &MyCollection.ItemByName("PHONELIST");
```

Next method: QueryDBRecord collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryDBRecord object in the QueryDBRecord collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryDBRecord object if successful, NULL otherwise.

Example

```
&MyQueryDBRecord = &MyCollection.Next();
```

QueryDBRecord Collection Property

In this section, we discuss the Count property.

Count property: QueryDBRecord collection

Description

This property returns the number of QueryDBRecord objects in the QueryDBRecord Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryDBRecord Class

A QueryDBRecord object is returned from the QueryDBRecord Collection methods First, Item, ItemByName, or Next.

See [QueryDBRecord Collection](#).

QueryDBRecord Class Methods

In this section, we discuss the QueryDBRecord class methods. The methods are discussed in alphabetical order.

QueryDBRecordFieldByIndex method: QueryDBRecord class

Syntax

```
QueryDBRecordFieldByIndex(Index)
```

Description

The QueryDBRecordFieldByIndex method returns the QueryDBRecordField object that exists at the *index* position in the QueryDBRecordField collection.

Parameters

Parameter	Description
<i>Index</i>	Specify the position number in the collection of the QueryDBRecordField object that you want returned.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Related Topics

- [QueryDBRecordFieldByName method: QueryDBRecord class](#)
- [QueryDBRecordField Class](#)
A QueryDBRecordField object is from the QueryDBRecord Collection methods First, Item, ItemByName or Next.

QueryDBRecordFieldByName method: QueryDBRecord class

Syntax

```
QueryDBRecordFieldByName(Name)
```

Description

The QueryDBRecordFieldByName method returns the QueryDBRecordField object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the QueryDBRecordField object that you want returned.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Related Topics

- [QueryDBRecordFieldByIndex method: QueryDBRecord class](#)
- [QueryDBRecordField Class](#)
A QueryDBRecordField object is from the QueryDBRecord Collection methods First, Item, ItemByName or Next.

QueryDBRecord Class Properties

In this section, we discuss the QueryDBRecord class properties. The properties are discussed in alphabetical order.

Description property: QueryDBRecord class

Description

This property returns the description of the QueryDBRecord as a string.

This property is read-only.

Name property: QueryDBRecord class

Description

This property returns the name of the QueryDBRecord as a string.

This property is read-only.

QueryDBRecordFields property: QueryDBRecord class

Description

This property returns a reference to a QueryDBRecordField Collection.

This property is read-only.

Related Topics

- [QueryDBRecordField Collection](#)
A QueryDBRecordField collection is returned from the QueryDBRecordFields QueryDBRecord property.

RecordHierarchy property: QueryDBRecord class

Description

This property returns a reference to a QueryRecordHierarchy Collection.

The record hierarchy is not related to the query tree hierarchy shown when viewing access groups. Instead, it reflects an actual relationship between the record components, as defined in Application Designer using the Parent Record Name feature.

This property is read-only.

Related Topics

- [QueryRecordHierarchy Collection](#)
A QueryRecordHierarchy collection is returned from the RecordHierarchy QueryDBRecord property.

QueryDBRecordField Collection

A QueryDBRecordField collection is returned from the QueryDBRecordFields QueryDBRecord property.

See [QueryDBRecordFields property: QueryDBRecord class](#).

QueryDBRecordField Collection Methods

In this section, we discuss the QueryDBRecordField collection methods. The methods are discussed in alphabetical order.

First method: QueryDBRecordField collection

Syntax

```
First()
```

Description

The First method returns the first QueryDBRecordField object in the QueryDBRecordField collection.

Parameters

None.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Example

```
&MyQueryDBRecordField = &MyCollection.First();
```

Item method: QueryDBRecordField collection

Syntax

`Item(number)`

Description

The Item method returns the QueryDBRecordField object that exists at the *number* position in the QueryDBRecordField collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryDBRecordField object that you want returned.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Example

```
For &I = 1 to &Coll.Count;  
    &MyQueryDBRecordField = &Coll.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryDBRecordField collection

Syntax

`ItemByName(Name)`

Description

The ItemByName method returns the QueryDBRecordField object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing QueryDBRecordField within the QueryDBRecordField collection. If you specify an invalid name, the object is NULL.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Example

```
&MyQueryDBRecordField = &MyCollection.ItemByName("PHONELIST");
```

Next method: QueryDBRecordField collection

Syntax

```
Next()
```

Description

The Next method returns the next QueryDBRecordField object in the QueryDBRecordField collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryDBRecordField object if successful, NULL otherwise.

Example

```
&MyQueryDBRecordField = &MyCollection.Next();
```

Sort method: QueryDBRecordField collection

Syntax

```
Sort(SortCriteria)
```

Description

Use the Sort method to sort the fields within the QueryDBRecordField collection, based on the sort criteria specified with the method.

Parameters

Parameter	Description
<i>SortCriteria</i>	Specify the sort order for the list. This parameter can take either a constant or numeric value. See below.

The values for *OutputFormat* can be as follows:

Numeric Value	Constant Value	Description
1	%Query_SortNameAsc	Sort database fields in ascending order based on field name.
2	%Query_SortNameDesc	Sort database fields in descending order based on field name.
3	%Query_SortFldNumAsc	Sort database fields in ascending order based on field number.
4	%Query_SortFldNumDesc	Sort database fields in descending order based on field number.

Returns

0

QueryDBRecordField Collection Property

In this section, we discuss the Count property.

Count property: QueryDBRecordField collection

Description

This property returns the number of QueryDBRecordField objects in the QueryDBRecordField Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryDBRecordField Class

A QueryDBRecordField object is from the QueryDBRecord Collection methods First, Item, ItemByName or Next.

See [QueryDBRecord Collection](#).

QueryDBRecordField Class Method

In this section, we discuss the QueryDBRecordField class methods in alphabetical order.

GetImageFormat method: QueryDBRecordField class

Syntax

```
GetImageFormat()
```

Description

Use the GetImageFormat method to differentiate between images and files, both stored as BLOBs in the database.

Note

Because images and files share the field type value 8, this method is required to differentiate between the two types.

Parameters

None.

Returns

A number. A value 16 indicates that the field is of type file (or attachment).

Related Topics

- [Type property: QueryDBRecordField class](#)

QueryDBRecordField Class Properties

In this section, we discuss the QueryDBRecordField class properties. The properties are discussed in alphabetical order.

Decimal property: QueryDBRecordField class

Description

This property returns the decimal positions for a field. This indicates how many numbers are allowed on the right side of the decimal.

This property is read-only.

Example

```
&FldDecs = &QryDBRcdFlds.Decimal;
```

Description property: QueryDBRecordField class

Description

This property returns the long description of the field as a string.

This is property is read-only.

Flag property: QueryDBRecordField class

Description

This property returns the Use and Edit Flags of the field, which are set when the Field is defined in Application Designer, as a numeric value.

Values for Use Flags are:

Value	Description
1	Key
2	Duplicate Key
4	System
8	Audit Field Add
16	Alternate Key
32	List Item
64	Descending Key
128	Audit Field Change
1024	Audit Field Delete
2048	Search Item
32768	Auto Update

Values for Edit Flags are:

Value	Description
256	Required
512	Edit Translate
4096	Date Range Edit
8192	Yes/No Table Edit
16384	Edit Table
262144	From Search Field
524288	Through Search Field
8388608	Use Default Label Flag
16777216	Default Search Field

This is a read-only property.

Format property: QueryDBRecordField class

Description

This property returns the field format for a field. Values are:

Value	Description
1	No format

Value	Description
2	Name
3	Phone Number North America
4	Zip/Postal Code North America
5	Social Security Number (SSN)
6	Uppercase
7	Mixed case
8	Raw binary
9	Numbers only
10	Canadian Social Insurance Number (SIN)
11	Phone Number International
12	Zip/Postal Code International
13	Seconds
14	Microseconds
15	Custom

This property is read-only.

Length property: QueryDBRecordField class

Description

This property returns the length of the field as a number.

This property is read-only.

LongName property: QueryDBRecordField class

Description

This property returns the long name of the field as a string.

This property is read-only.

LookupTableName property: QueryDBRecordField class

Description

If the field has a lookup table associated with it, this property returns the name of that Lookup Table, else it returns an empty string.

This is a read-only property.

LookupTableRecord property: QueryDBRecordField class

Description

If the field has a lookup table associated with it, this property returns the instance of the QueryDBRecord for that Lookup Table, else it returns NULL.

This is a read-only property.

Name property: QueryDBRecordField class

Description

This property returns the name of the field as a string.

This property is read-only.

Shortname property: QueryDBRecordField class

Description

This property returns the short name of the field as a string.

This property is read-only.

Type property: QueryDBRecordField class

Description

This property returns the type of the field. You can specify either a constant or a numeric value for this property. The values are:

Numeric Value	Constant Value	Description
0	%FieldType_Char	Character
1	%FieldType_LongChar	Long Character
2	%FieldType_Number	Number
3	%FieldType_SignedNumber	Signed number
4	%FieldType_Date	Date
5	%FieldType_Time	Time
6	%FieldType_DateTime	DateTime
8	%FieldType_Image	Image
8	%FieldType_File	File
9	%FieldType_ImageRef	ImageReference

Note

The Image and File types can be differentiated using the GetImageFormat method of the QueryField class.

This property is read-only.

Related Topics

- [GetImageFormat method: QueryDBRecordField class](#)

QueryPrompt Collection

A QueryPrompt collection is returned from the Prompts and RuntimePrompts Query class properties.

See [Prompts property: Query class](#), [RunTimePrompts property: Query class](#).

QueryPrompt Collection Methods

In this section, we discuss the QueryPrompt collection methods. The methods are discussed in alphabetical order.

First method: QueryPrompt collection

Syntax

```
First()
```

Description

The First method returns the first QueryPrompt object in the QueryPrompt collection.

Parameters

None.

Returns

A reference to a QueryPrompt object if successful, NULL otherwise.

Example

```
&MyQueryPrompt = &MyCollection.First();
```

Item method: QueryPrompt collection

Syntax

```
Item(number)
```

Description

The Item method returns the QueryPrompt object that exists at the *number* position in the QueryPrompt collection.

Parameters

Parameter	Description
<i>Number</i>	Specify the position number in the collection of the QueryPrompt object that you want returned.

Returns

A reference to a QueryPrompt object if successful, NULL otherwise.

Example

```
For &I = 1 to &QueryPromptColl.Count;  
    &MyQueryPrompt = &QueryPromptColl.Item(&I);  
    /* do processing */  
End-For;
```

ItemByName method: QueryPrompt collection

Syntax

ItemByName(*Name*)

Description

The ItemByName method returns the QueryPrompt object with the name *Name*.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of an existing QueryPrompt within the QueryPrompt collection. If you specify an invalid name, the object is NULL.

Returns

A reference to a QueryPrompt object if successful, NULL otherwise.

Example

```
&MyQueryPrompt = &MyCollection.ItemByName("PHONELIST");
```

Next method: QueryPrompt collection

Syntax

Next()

Description

The Next method returns the next QueryPrompt object in the QueryPrompt collection. You can use this method only after you have used the First method: otherwise the system doesn't know where to start.

Parameters

None.

Returns

A reference to a QueryPrompt object if successful, NULL otherwise.

Example

```
&MyQueryPrompt = &MyCollection.Next();
```

QueryPrompt Collection Property

In this section, we discuss the QueryPrompt collection properties. The properties are discussed in alphabetical order.

Count property: QueryPrompt collection

Description

This property returns the number of QueryPrompt objects in the QueryPrompt Collection, as a number.

This property is read-only.

Example

```
&COUNT = &MY_COLLECTION.Count;
```

QueryPrompt Class

A reference to a QueryPrompt is returned by the following:

- The First, Item, ItemByName, and Next methods of a QueryPrompt Collection.
- The AddPrompt Query class method.

See [QueryPrompt Collection](#), [AddPrompt method: Query class](#).

See Query: Defining Prompts.

QueryPrompt Properties

In this section, we discuss the QueryPrompt properties. The properties are discussed in alphabetical order.

EditType property: QueryPrompt class

Description

This property returns or sets the edit type for the field. This property takes a number value. The values are:

Value	Description
0	No table edit

Value	Description
16384	Prompt table
512	Translate table
8192	Yes/No

This property is read/write.

FieldDecimal property: QueryPrompt class

Description

This property returns or sets the decimal value for the field.

This property is only valid with number fields.

This property is read/write.

FieldFormat property: QueryPrompt class

Description

This property returns the field format for a field. This property takes a number value. Values are:

Value	Description
0	None
1	Name
2	Phone
3	Zip Code
4	Social Security Number
5	Upper
6	Mixed Case
7	Century
8	Number Only
9	Social Insurance Number
10	International Phone Number
11	International Postal Code
12	Seconds
13	Microseconds
14	Century/Seconds
15	Century/Microseconds

This property is read-only.

FieldLength property: QueryPrompt class

Description

This property returns or sets the field length.

This property is read/write.

FieldName property: QueryPrompt class

Description

This property returns or sets the field name used with the prompt.

This property is read/write.

FieldType property: QueryPrompt class

Description

This property returns or sets the field type of the field used with the prompt.

This property returns the type of the field. You can specify either a constant or a numeric value. The values are:

Numeric Value	Constant Value	Description
0	%FieldType_Char	Character
1	%FieldType_LongChar	Long Character
2	%FieldType_Number	Number
3	%FieldType_SignedNumber	Signed number
4	%FieldType_Date	Date
5	%FieldType_Time	Time
6	%FieldType_DateTime	DateTime
7	%FieldType_Image	Image

This property is read/write.

HeadingText property: QueryPrompt class

Description

This property returns or sets the heading text for the prompt field.

This property is read/write.

HeadingType property: QueryPrompt class

Description

This property returns or sets the heading type for the query field. This property takes either a constant or numeric value. The values are:

Numeric Value	Constant Value	Description
1	%Query_HdgNone	Query field has no heading.
2	%Query_HdgText	Query field has a text heading.
3	%Query_HdgRftShort	Query field uses the short RFT heading.
4	%Query_HdgRftLong	Query fields uses the long RFT heading.

This property is read/write.

LangCount property: QueryPrompt class

Description

This property returns the total count of the language records for the current prompt.

This property is read-only.

Name property: QueryPrompt class

Description

This property returns a string containing the Prompt name. When an existing query is read, this name is the same as the Field Name. When a new prompt is added using AddPrompt, this is the *Name* parameter used with that method.

This property is read-only.

PromptRecordFieldName property: QueryPrompt class

Description

When you have more than one field with the same name in the prompt collection, the system generates a unique prompt field name for each repeated field. The generated names are of the form Bind1, Bind2, and so on. This property returns the unique name for the prompt record field.

This property is read-only.

PromptTable property: QueryPrompt class

Description

This property returns or sets the prompt table name for the prompt field.

This property is read/write.

UniquePromptName property: QueryPrompt class

Description

This property returns or sets the unique prompt name for the prompt field.

This property is read/write.

UseCount property: QueryPrompt class

Description

This property returns the total count of the usage of the current prompt.

This property is read-only.

The following are examples of the usual actions that you perform using the query classes.

Query Classes Examples

The following are examples of the usual actions that you perform using the query classes.

Creating a New Query

In this example, you are creating a new query, adding a record and two fields. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &aQuery, &aQrySelCol;
Local ApiObject &COLL, &ERROR;
Local String &TEXT;
Local Session &MySession;
Local Record &aQryRcd;
Local Field &aQryFld;
&MySession = %Session;
If &MySession <> Null Then
    &aQuery = &MySession.GetQuery();
    &aQuery.Create("TEST1", False, %Query_Query, "PIA Test 1", ⇒
"Creating Test Query 1 from PIA Page");
    &aQrySel = &aQuery.AddQuerySelect();
    &aQryRcd = &aQrySel.AddQueryRecord("ABSENCE_HIST");
    &aQryFld = &aQrySel.AddQuerySelectedField("ABSENCE_HIST", "A", "EMPLID",
"ID");
    If &aQryFld <> Null Then
        &aQryFld.ColumnNumber = 1;
        &aQryFld.HeadingType = %Query_HdgRftShort;
    End-If;
    &Rslt = &aQuery.Save();
    If &Rslt <> 0 Then
        /* save didn't complete */
        &COLL = &MySession.PSMessages;
        For &I = 1 to &COLL.Count
            &ERROR = &COLL.Item(&I);
            &TEXT = &ERROR.Text;
            /* do error processing */
        End-For;
        &COLL.DeleteAll();
    End-if;
    /* error processing for not getting a session */
End-if;
```

To create a new query:

1. Get a session object.

Before you can create a query, you have to get a session object. The session controls access to the query, provides error tracing, enables you to set the runtime environment, and so on. Then this program checks to verify that the session object is valid.

```
&MySession = %Session;  
  
&aQuery = &MySession.GetQuery();  
  
If &MySession <> Null Then
```

2. Create the query.

Use the Create method to create the query. This query is a private query, of type query.

```
&aQuery.Create("TEST1", False, %Query_Query, "Test 1", "Creating Test  
Query");
```

3. Add a QuerySelect.

The QuerySelect contains the main query statement for the query. There can be multiple QuerySelect objects for queries that involve unions or subqueries. Each select (or union or subquery) consists of QueryRecords, QueryOutputFields, QuerySelectedFields, and QueryCriteria and is treated as a child of the MAIN select statement.

```
&aQrySel = &aQuery.AddQuerySelect();
```

4. Add a record and a field.

The AddQueryRecord method adds a query record to the query. The AddQuerySelectedField adds a field, using the record alias "A". The ID is what gets displayed in the heading for the query.

```
&aQryRcd = &aQrySel.AddQueryRecord("ABSENCE_HIST");  
&aQryFld = &aQrySel.AddQuerySelectedField("ABSENCE_HIST", "A", "EMPLID",  
"ID");
```

5. Make the field an output field.

The field was added as a selected field. By setting the ColumnNumber to a number greater than one, the field is now an output field. The text that's displayed in the heading comes from the RFT short description of the field.

```
    If &aQryFld <> Null Then  
        &aQryFld.ColumnNumber = 1;  
        &aQryFld.HeadingType = %Query_HdgRftShort;  
    End-If;
```

6. Save the data.

When you execute the Save method, the new query is saved to the database.

```
&Rslt = &aQuery.Save();
```

```
If &Rslt <> 0 Then
```

The Save method returns a numeric value: 0 if successful. You can use this value to do error checking.

7. Check Errors.

You can check if there were any errors using the PSMessages property on the session object.

```
/* save didn't complete */
&COLL = &MySession.PSMessages;
For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
    &TEXT = &ERROR.Text;
    /* do error processing */
End-For;
&COLL.DeleteAll();
End-if;
```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, you may want to delete it from the PSMessages collection.

Adding Criteria

In this example, you are accessing an existing query, then adding criteria both as part of the query as well as part of a subquery. The SQL statement created by this subquery is as follows:

```
SELECT RECNAME, RECDSCR, RELLANGRECNAME, PARENTRECNAME, DESCRLONG from
PSRECDEFN =>
where RECNAME IN (select OBJECTVALUE1 from PSPROJECTITEM where PROJECTNAME =>
'PPLTOOLS') AND RECTYPE = 0 order by RECNAME
```

The following is the complete code sample: the steps explain each line.

```
Local ApiObject &MyQuery, &MainQrySel, &Criteria1, &MyCrit2Expr2,
&MyCriteria2;
Local ApiObject &SubQrySel, &SubQryCrit1, &SubQryExpr1, &MyCrit2Expr2;
Local Record &SubQryRec;
Local Session = &MySession;
Local ApiObject &COLL, &ERROR;
Local String &TEXT;
&MySession = %Session;
If &MySession <> Null Then
    &MyQuery = &MySession.GetQuery();
    &MyQuery.Open("Table", False, True);
    &MainQrySel = &MyQuery.QuerySelect;
    /* Add query record, add fields, then make selected fields output fields */
```

```

&MainRec = &MainQrySel.AddQueryRecord("PSRECDEFN");
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "RECNAME", "Record Name");
&QryFld.ColumnNumber = 1;
&QryFld.OrderByNumber = 1;
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "RECDESCR", "Record Descr");
&QryFld.ColumnNumber = 2;
&QryFld.OrderByNumber = 2;
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "RELLANGRECNAME", "Record Lang Rec");
&QryFld.ColumnNumber = 3;
&QryFld.OrderByNumber = 3;
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "PARENTRECNAME", "Parent Record Name");
&QryFld.ColumnNumber = 4;
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "DESCRLONG", "Long Descr");
&QryFld.ColumnNumber = 5;
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias,⇒
    "EMPLID", "ID");
&QryFld.ColumnNumber = 6;
/* adding first criteria */
&Criteria1 = &MainQrySel.AddCriteria("FirstCriteria");
/* First criteria will not have any logical AND/OR */
&Criteria1.Logical = %Query_CombNotUsed;
&Criteria1.Expr1Type = %Query_ExprField;
&Criteria1.AddExpr1Field(&MainRec.RecordAlias, "RECNAME");
/* So that the criteria is constructed as - RECNAME IN (...)*/
&Criteria1.Operator = %Query_CondInList;
&Criteria1.Expr2Type = %Query_ExprSubQuery;
&SubQrySel = &Criteria1.AddExpr2SubQuery();
&SubQryRec = AddQueryRecord("PSPROJECTITEM");
&SubQryFld1 = &SubQrySel.AddQuerySelectedField(&SubQryRec.Name,
&SubQryRec.Record⇒
Alias, "OBJECTVALUE1", "Join Object")
&SubQryFld1.ColumnNumber = 1;
/* Need criteria - PROJECTNAME = 'PPLTOOLS' - in the subquery */
&SubQryCrit1 = &SubQrySel.AddCriteria("FirstSubCrit");
/* First criteria will not have any logical AND/OR */
&SubQryCrit1.Logical = %Query_CombNotUsed;
&SubQryCrit1.Expr1Type = %Query_ExprField;
&SubQryCrit1.AddExpr1Field(&SubQryRec.RecordAlias, "PROJECTNAME");
&SubQryCrit1.Operator = %Query_CondEqual;
/* So that the criteria is constructed as - PROJECTNAME = 'PPLTOOLS'*/
&SubQryCrit1.Expr2Type = %Query_ExprConstant;
&SubQryExpr1 = &SubQryCrit1.AddExpr2Expression();
&SubQryExpr1.Text = "PPLTOOLS";
&SubQryCrit1.Expr2Expression1 = &SubQryExpr1;
/* Second Criteria, which is for RECTYPE = 0 */

```

```

&MyCriteria2 = &MainQrySel.AddCriteria("SecondCriteria");
&MyCriteria2.Expr1Type = %Query_ExprField;
&MyCriteria2.AddExpr1Field(&MainRec.RecordAlias, "RECTYPE");
/* Since this is second criteria, we need a logical AND to state that */
/* - AND RECTYPE = 0 */
&MyCriteria2.Logical = %Query_CombAnd;
&MyCriteria2.Operator = %Query_CondEqual;
&MyCriteria2.Expr2Type = %Query_ExprConstant;
&MyCrit2Expr2 = &MyCriteria2.AddExpr2Expression();
&MyCriteria2.Expr2Expression1 = &MyCrit2Expr2;
&MyCrit2Expr2.Text = "0";
&Rslt = &MyQuery.Save();
If &Rslt <> 0 Then
    /* save didn't complete */
    &COLL = &MySession.PSMessages;
    For &I = 1 to &COLL.Count
        &ERROR = &COLL.Item(&I);
        &TEXT = &ERROR.Text;
        /* do error processing */
    End-For;
    &COLL.DeleteAll();
End-if;
Else
/* do error processing for not getting session */
End-if;

```

To add criteria to a query:

1. Get a session object.

Before you can create a query, you have to get a session object. The session controls access to the query, provides error tracing, enables you to set the runtime environment, and so on. Then this program checks to verify that the session object is valid.

```

&MySession = %Session;

&MyQuery = &MySession.GetQuery();

If &MySession <> Null Then

```

2. Access an existing query and get the main query select statement.

Use the Open method to get the existing query. Then access the main select statement with the QuerySelect property.

```

&MyQuery.Open("Table", False, True);
&MainQrySel = &MyQuery.QuerySelect;

```

3. Add Query Record in the Main Select.

Add the query record that you want to use.

```

&MainRec = &MainQrySel.AddQueryRecord("PSRECDEFN");

```

4. Add the displayed fields.

You want to add the selected fields. Note instead of hardcoding the name of the record, this code example uses the Name property. Also, the code uses the RecordAlias property instead of hardcoding the alias. This makes the code easier to read, as well as easier to maintain. Specifying a column number also makes this an output field.

```
&QryFld = &MainQrySel.AddQuerySelectedField(&MainRec.Name,
&MainRec.RecordAlias, ⇒
"RECNAME", "Record Name");
&QryFld.ColumnNumber = 1;
```

5. Specify the OrderBy value.

Because we need to order by this field, the OrderByNumber of that field must be set also.

```
&QryFld.OrderByNumber = 1;
```

6. Add the first criteria.

Add the first criteria. You don't want it added with any kind of operator, like an AND or an OR, so the Logical property of the first criteria is set with %Query_CombNotUsed. This is also used because it's the first non-having criteria of a query.

```
/* adding first criteria */
&Criteria1 = &MainQrySel.AddCriteria("FirstCriteria");
/* First criteria will not have any logical AND/OR */
&Criteria1.Logical = %Query_CombNotUsed;
```

7. Add the first criteria field.

The first field for the criteria is a QueryExpression type field. The type of the field *must* be set before the field is added.

```
&Criteria1.Expr1Type = %Query_ExprField;
&Criteria1.AddExpr1Field(&MainRec.RecordAlias, "RECNAME");
```

8. Add the condition for the first criteria and the subquery.

The first criteria is the WHERE RECNAME IN portion of the SQL statement. The condition is considered 'in list', where the list is the result of the subquery. The expression is a subquery. Again, you have to set the type again before adding the subquery.

```
&Criteria1.Operator = %Query_CondInList;
&Criteria1.Expr2Type = %Query_ExprSubQuery;
&SubQrySel = &Criteria1.AddExpr2SubQuery();
```

9. Add the records for the subquery.

Add the query record and the field from the query field, and make it an output field.

```
&SubQryRec = AddQueryRecord("PSPROJECTITEM");
&SubQryFld1 = &SubQrySel.AddQuerySelectedField(&SubQryRecName.Name, ⇒
&SubQryRec.RecordAlias, "OBJECTVALUE1", "Join Object");
&SubQryFld1.ColumnNumber = 1;
```

10. Add the criteria in the subquery.

The following code adds the criteria for the subquery. Because this is the first non-having criteria in a select statement, the Logical property is set as %Query_CombNotUsed. Then

the first expression is added as a field, and set to be equal to the second expression, PPLTOOLS. This is the where PROJECTNAME = 'PPLTOOLS' portion of the SQL statement.

```
/* Need criteria - PROJECTNAME = 'PPLTOOLS' - in the subquery */
&SubQryCrit1 = &SubQrySel.AddCriteria("FirstSubQryCrit");
/* First criteria will not have any logical AND/OR */
    &SubQryCrit1.Logical = %Query_CombNotUsed;
    &SubQryCrit1.Expr1Type = %Query_ExprField;
    &SubQryCrit1.AddExpr1Field(&SubQryRec.RecordAlias, "PROJECTNAME");
&SubQryCrit1.Operator = %Query_CondEqual;
/* So that the criteria is constructed as - PROJECTNAME = 'PPLTOOLS'*/
&SubQryCrit1.Expr2Type = %Query_ExprConstant;
&SubQryExpr1 = &SubQryCrit1.AddExpr2Expression();
&SubQryExpr1.Text = "PPLTOOLS";
    &SubQryCrit1.Expr2Expression1 = &SubQryExpr1;
```

11. Add the second criteria to the main select.

Add the second criteria. Remember to set the type for the expression field first. Because this is the second criteria, we need a logical AND to state that this criteria is used with the first criteria.

```
/* Second Criteria, which is for RECTYPE = 0 */
&MyCriteria2 = &MainQrySel.AddCriteria("SecondCriteria");
&MyCriteria2.Expr1Type = %Query_ExprField;
&MyCriteria2.AddExpr1Field(&MainRec.RecordAlias, "RECTYPE");
/* Since this is second criteria, we need a logical AND to state that*/
/* - AND RECTYPE = 0 */
&MyCriteria2.Logical = %Query_CombAnd;
&MyCriteria2.Operator = %Query_CondEqual;
&MyCriteria2.Expr2Type = %Query_ExprConstant;
&MyCrit2Expr2 = &MyCriteria2.AddExpr2Expression();
&MyCriteria2.Expr2Expression1 = &MyCrit2Expr2;
&MyCrit2Expr2.Text = "0";
```

12. Save the data.

When you execute the Save method, the new query is saved to the database.

```
&Rslt = &MyQuery.Save();
```

```
If &Rslt <> 0 Then
```

The Save method returns a numeric value: 0 if successful. You can use this value to do error checking.

13. Check Errors

You can check if there were any errors using the PSMessages property on the session object.

```
/* save didn't complete */
&COLL = &MySession.PSMessages;
For &I = 1 to &COLL.Count
    &ERROR = &COLL.Item(&I);
```

```

        &TEXT = &ERROR.Text;
        /* do error processing */
    End-For;
    &COLL.DeleteAll();
End-if;

```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error. As you correct each error, you may want to delete it from the PSMessages collection.

Using Outer Joins

The following PeopleCode query uses outer joins:

```

Local ApiObject &aQuery, &aQrySelCol;
Local ApiObject &aQryRcd, &aQryRcd2;
Local ApiObject &aQryFld, &aQryFld2;
Local ApiObject &aQrySel, &Criteria1;
Local number &RsIt;
&aQuery = %Session.GetQuery();
&aQuery.Create("TEST1", False, %Query_Query, "PIA Test 1", ⇒
"Creating Test Query1 from PIA Page");
&aQrySel = &aQuery.AddQuerySelect();
&aQryRcd = &aQrySel.AddQueryRecord("JOB");
&aQryRcd.RecordAlias = "A";
&aQryRcd2 = &aQrySel.AddQueryRecord("PERSONAL_DATA");
&aQryRcd2.RecordAlias = "B";
&aQryRcd2.JoinType = %Query_JoinLeftOuter;
&aQryRcd2.JoinAlias = "A";
&aQryFld = &aQrySel.AddQuerySelectedField("JOB", "A", "EMPLID", "EMPLID");
&aQryFld.ColumnNumber = 1;
&aQryFld HeadingType = %Query_HdgRftShort;
&aQryFld2 = &aQrySel.AddQuerySelectedField("PERSONAL_DATA", "B", ⇒
"NAME", "NAME");
&aQryFld2.ColumnNumber = 2;
&aQryFld2 HeadingType = %Query_HdgRftShort;
&Criteria1 = &aQrySel.AddCriteria("JoinCriteria");
&Criteria1.Logical = %Query_CombNotUsed;
&Criteria1.Expr1Type = %Query_ExprField;
&Criteria1.AddExpr1Field("A", "EMPLID");
&Criteria1.Operator = %Query_CondEqual;
&Criteria1.Expr2Type = %Query_ExprField;
&Criteria1.AddExpr2Field1("B", "EMPLID");
&Criteria1.OJAlias = "B";
&RsIt = &aQuery.Save();

```

The above PeopleCode program produces the following SQL:

```

SELECT A.EMPLID, B.NAME
FROM (PS_JOB A LEFT OUTER JOIN PS_PERSONAL_DATA B ON A.EMPLID=B.EMPLID)

```

Record Class

Understanding Record Class

A record object, instantiated from the Record class, is a single instance of a data within a row and is based on a record definition. A record object consists of one to n fields.

If a record object is instantiated using `GetRecord` (either the function or the method), the record object that is instantiated references the record from the current row in the data buffers, and its associated data.

If a record object is instantiated using the `CreateRecord` function, the record object that's instantiated is a freestanding record definition with its component set of field objects in the data buffer. The fields created by this function are initialized to null values, that is, they do *not* contain any data. Default processing is not performed. You can select into this record object using the `SelectByKey` method. You can also select into this record object using `SQLExec`.

`CopyFieldsTo` is a commonly used method for the record class. `Name`, `IsChanged`, and `FieldCount` are commonly used properties.

The record class is one of the data buffer access classes.

Related Topics

- PeopleCode Developer's Guide: Understanding Data Buffer Access

Shortcut Considerations

An expression of the form

`RECORD.recname.property`

or

`RECORD.recname.method( . . . )`

is converted to an object expression by using `GetRecord(RECORD.recname)`. For example, the following two lines of code are equivalent:

```
&MyRow = RECORD.EMPL_CHKLIST_ITEM.ParentRow;
```

```
&MyRow = GetRecord(RECORD.EMPL_CHKLIST_ITEM).ParentRow;
```

In addition, the default method for the Record class is the `GetField` method. This means you can access a field by just specifying the field name, instead of using `GetField`. For example, the following two lines of code, which both disable the `EMPLID` field, are equivalent:

```
&MyRec.EMPLID.Enabled = False;
```

```
&MyRec.GetField(FIELD.EMPLID).Enabled = False;
```

Note

If the field you're accessing has the same name as a record property (such as, `Name`) you can't use this method for accessing the field. You must use the `GetField` method.

Record Methods Used to Create SQL Statements

You can use the following record object methods to build and execute SQL statements:

- `Delete`
- `SelectByKey`
- `Insert`
- `Save`
- `Update`

The methods that result in a database update (specifically, `UPDATE`, `INSERT`, and `DELETE`) can only be issued in the following events:

- `SavePreChange`
- `WorkFlow`
- `SavePostChange`
- `FieldChange`

Remember that record `UPDATE`s, `INSERT`s, and `DELETE`s go directly to the database server, not to the Component Processor (although you can view data in the buffer using the PeopleCode debugger and other data buffer access classes). If a record method assumes that the database has been updated based on changes made in the component, that record method can be issued only in the `SavePostChange` event, because before `SavePostChange` none of the changes made to page data has actually been written back to the database.

If your application is repeating the same instruction many times, such as doing a million `INSERT`s, you should use the SQL object with the `BulkMode` property set to `True`, rather than the record SQL methods.

Related Topics

- [Delete method: Record class](#)
- [SelectByKey method: Record class](#)
- [Insert method: Record class](#)
- [Update method: Record class](#)

- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.

Data Type of a Record Object

Record objects are declared as type Record. For example,

```
Local Record &MYRECORD;
```

Scope of a Record Object

A record can only be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, Component Interface PeopleCode, and so on.

Record Class Built-in Functions

PeopleCode Language Reference: CreateRecord function

PeopleCode Language Reference: GetRecord function

Record Class Methods

In this section, we discuss each Record class method. The methods are discussed in alphabetical order.

CompareFields method: Record class

Syntax

```
CompareFields(recordobject)
```

Description

The CompareFields method compares all like-named fields of the record object executing the method with the specified record object *recordobject*.

Parameters

Parameter	Description
<i>recordobject</i>	Specify a record object for use in the comparison. The specified record object does not have to refer to the same record as the record object executing the method.

Returns

A Boolean value; True if all like-named fields have the same value.

Example

```
&REC = GetRecord(RECORD.OP_METH_VW);  
&REC2 = GetRecord(RECORD.OPC_METH);  
If &REC2.CompareFields(&REC) Then  
    WinMessage("All liked named fields have the same value");  
End-If;
```

Related Topics

- [CopyChangedFieldsTo method: Record class](#)
- [CopyFieldsTo method: Record class](#)

CopyChangedFieldsTo method: Record class

Syntax

CopyChangedFieldsTo(*recordobject*)

Description

The CopyChangedFieldsTo method copies all like-named field values that have changed from the record object executing the method to the specified record object *recordobject*. This copies only changed field values. To copy all field values, use the CopyFieldsTo method.

Note

This method works only with database records. The Component Processor doesn't track the contents of work records, so there is no changed value to use for copying changed fields.

Parameters

Parameter	Description
<i>recordobject</i>	Specify a record object to be copied to. The specified record object does not have to refer to the same record as the record object executing the method.

Returns

None.

Example

```
Local Record &REC, &REC2;
```

```
&REC = GetRecord(RECORD.OPC_METH);

/* make changes to the values of fields in the record */

&REC2 = CreateRecord(RECORD.OPC_METH_WORK);

&REC.CopyChangedFieldsTo(&REC2);
```

Related Topics

- [CompareFields method: Record class](#)
- [CopyFieldsTo method: Record class](#)

CopyFieldsTo method: Record class

Syntax

```
CopyFieldsTo(recordobject [, DontCopyUnusedInSource [,  
DontCopyUnusedInDestination]] [, IsBatch])
```

Description

The CopyFieldsTo method copies all like-named field values from the record object executing the method to the specified record object *recordobject*. This copies all field values.

To copy only changed field values, use the CopyChangedFieldsTo method.

To restrict the copy to fields that have been marked as unused (set using the SetDBFieldNotUsed function) you can specify either *DontCopyUnusedInSource* or *DontCopyUnusedInDestination*.

Note

If you are copying to a derived work record, the IsChanged flag for the record is not set. Copying fields to a database record does set the IsChanged flag to True.

Parameters

Parameter	Description
<i>recordobject</i>	Specify a record object to be copied to. The specified record object does not have to refer to the same record as the record object executing the method.
<i>DontCopyUnusedInSource</i>	Specify this parameter to be True if you want to restrict the copy of fields to not include fields marked as unused in the record of the object performing the CopyFieldsTo method. This is the source record. The default value for this parameter is False, which means that there are no restrictions on the copy of unused fields as defined in the source record.

Parameter	Description
<i>DontCopyUnusedInDestination</i>	Specify this parameter to be True if you want to restrict the copy of fields to not include fields marked as unused in the recordobject record which is the destination record. Note: To specify this record to be true you must specify a value for <i>DontCopyUnusedInSource</i> . The default value for this parameter is False meaning that there are no restrictions on the copy of unused fields as defined in the destination record.
<i>IsBatch</i>	Specify whether this method is being called from an online program or from a batch program (such as an Application Engine program.) The default is false. Using this method may improve batch performance. When set to true, the system uses the FieldNotUsed information directly from the field properties already in the memory

Returns

None.

Example

Local Record &REC, &REC2;

```
&REC = GetRecord(RECORD.OPC_METH);
&REC2 = CreateRecord(RECORD.OPC_METH_WORK);
&REC.CopyFieldsTo(&REC2);
```

In the following example, records are copied into a record after being fetched.

```
Component number &displayNum;
Local SQL &sql;
Local Rowset &rs, &rs2;

&level0 = GetLevel0();
&displayNum = WS_NUM_ORDERS;

&rs = GetRowset(Record.WS_ORD_HDR_VW);
&rs.Flush();
WinMessage("1");
&sql = CreateSQL("%selectall(:1) where BUSINESS_UNIT=:2",
Record.WS_ORD_HDR_VW, ⇒
"M04");
WinMessage("2");
&rec = CreateRecord(Record.WS_ORD_HDR_VW);

For &i = 1 To &displayNum
  If &sql.Fetch(&rec) Then
    &rs.InsertRow(&i);
    &rec.copyfieldsto(&rs.GetRow(&i).WS_ORD_HDR_VW);
```

```

        &rs2 = &rs.GetRow(&i).GetRowset(1);
        &rs2.Select(Record.WS_ORD_LINE_VW, "where BUSINESS_UNIT=:1 and
ORDER_NO=:2", =>
        &rec.BUSINESS_UNIT.value, &rec.ORDER_NO.value);
        /* Hide rows that do not contain Products */
        If &rs2 = Null Or None(&rs2.GetRow(1).WS_ORD_LINE_VW.ORDER_INT_LINE_=>
NO.Value) Then
            For &j = 1 To &rs2.ActiveRowCount
                &rs2.GetRow(&j).Visible = False;
            End-For;
        End-If;
    End-If;
End-For;

&rs.GetRow(&i).Visible = False;

```

The following example is for unused record fields:

```

Local Record &From = CreateRecord(Record.QE_UPS_TIME);

/* setup the initial values */

&From.QE_FROM_ZIP.Value = "12345";
&From.QE_TO_ZIP.Value = "67890";
&From.QE_UPS_TIME_BUTTON.Value = "A";
&From.DESCRLONG.Value = "This is the from record.";

/* Now make one of the fields unused */
Local string &ToZip_Value = "77777";

/* start out clean with &To */
Local Record &To = CreateRecord(Record.QE_UPS_TIME);
&To.QE_TO_ZIP.Value = &ToZip_Value;
If SetDBFieldNotUsed(Field.QE_TO_ZIP, True) <> %MetaDataChange_Success Then
    MessageBox(0, "", 0, 0, "SSetDBFieldNotUsed(Field.QE_TO_ZIP, TRUE)
fails??");
End-If;
/* Copy no unused fields from the source record */
&From.CopyFieldsTo(&To, True /* no unused fields from source */);

/* Copy to no unused fields in the destination */
&From.CopyFieldsTo(&To, False /* all fields from source */, True /* no unused=>
fields in dest */);

/* Copy no unused fields either in source or destination */

&From.CopyFieldsTo(&To, True /* no unused fields from source */, True /* no
unused=>
fields in dest */);

/* Now finally make that field good again */

If SetDBFieldNotUsed(Field.QE_TO_ZIP, False) <> %MetaDataChange_Success Then
    MessageBox(0, "", 0, 0, "SSetDBFieldNotUsed(Field.QE_TO_ZIP, False)

```

```
fails??");  
End-If;
```

Related Topics

- [CompareFields method: Record class](#)
- [CopyChangedFieldsTo method: Record class](#)
- [IsChanged property: Record class](#)
- PeopleCode Language Reference: SetDBFieldNotUsed function

Delete method: Record class

Syntax

```
Delete()
```

Description

The Delete method uses the key fields of the record and their values to build and execute a DELETE SQL statement which deletes the record (row of data) from the SQL data table.

This method, like the DeleteRow Rowset class method, initially marks the record or row as needing to be deleted. At save time the row is actually deleted from the database and cleared from the buffer.

Because this method results in a database change, it can be issued only in the following events:

- SavePreChange
- WorkFlow
- SavePostChange

If your application is repeating the same instruction multiple times, such as doing a million DELETES, use the SQL object with the BulkMode property set to True, rather than the record SQL methods.

For every record deleted by the Delete method, if the set language is not the base language and the record has related language records, the Delete method tries to do related language processing.

Parameters

None.

Returns

The result is True on successful completion, False if the record was not found. Any other conditions cause termination.

Example

Suppose that KEYF1 and KEYF2 are the two key fields of record definition MYRECORD. The following code deletes the database record that has KEYF1 equal to "A" and KEYF2 equal to "X":

```
Local record &REC;  
&REC = CreateRecord(RECORD.MYRECORD);  
&REC.KEYF1.Value = "A";  
&REC.KEYF2.Value = "B";  
&REC.MYRF3.Value = "X";  
&REC.MYRF4.Value = "Y";  
&REC.Insert();
```

Related Topics

- [SelectByKey method: Record class](#)
- [Insert method: Record class](#)
- [Update method: Record class](#)
- [DeleteRow method: Rowset class](#)
- [Understanding SQL Class](#)

You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.

- Global Technology: Understanding Related Language Tables

ExecuteEdits method: Record class

Syntax

```
ExecuteEdits([edit level]);
```

where *edit levels* is a list of values in the form:

```
edit level1 [+ edit level2] . . . .];
```

and where *edit leveln* is one of the following constants:

%Edit_DateRange

%Edit_OneZero

%Edit_PromptTable

%Edit_Required

%Edit_TranslateTable

%Edit_YesNo

Description

The `ExecuteEdits` method executes the standard system edits on every field in the record. The types of edits performed depends on the *editlevel*. If no *editlevel* is specified, all system edits are executed. All *editlevels* are already defined for the record definition or for the field definition, that is:

- Reasonable Date Range (Is the date contained within the specified reasonable date range?)
- 1/0 (Do all 1/0 fields contain only a 1 or 0?)
- Prompt Table (Is field data contained in the specified prompt table?)
- Required Field (Do all required fields contain data? For numeric or signed fields, it checks that they do not contain NULL or 0 values.)
- Translate Table (Is field data contained in the specified translate table?)
- Yes/No (Do all yes/no fields only contain only yes or no data?)

Note

`ExecuteEdits` does not perform any validation on `DateTime` fields.

If any of the edits fail, the status of the property `IsEditError` is set to `False` for the record. The field property `EditError` is set to `True` for any fields that are in error. In addition, the `Field` class properties `MessageNumber` and `MessageSetNumber` are set to the number of the returned message and message set number of the returned message, for each field in error.

You must use the `SetEditTable` method to set the prompt tables for fields that are defined with `%EditTable` in the record definition.

If you're running an Application Engine program, and you want to do set based `ExecuteEdits` (as opposed to row-by-row) consider using the meta-SQL construct `%ExecuteEdits`.

See [SetEditTable method: Record class](#), [EditError property: Field class](#), [MessageNumber property: Field class](#), [MessageSetNumber property: Field class](#), Application Engine: Using Application Engine Meta-SQL.

Parameters

Parameter	Description
<i>editlevel</i>	Specifies the standard system edits to be performed against every field on every record. If <i>editlevel</i> isn't specified, all system edits are performed. <i>editlevel</i> can be any of the following system variables. • <code>%Edit_DateRange</code> • <code>%Edit_OneZero</code> • <code>%Edit_PromptTable</code> • <code>%Edit_Required</code> • <code>%Edit_TranslateTable</code> • <code>%Edit_YesNo</code>

Returns

None.

Example

The following is an example of a call to execute Required Field and Prompt Table edits:

```
&REC.ExecuteEdits(%Edit_Required + %Edit_PromptTable);
```

The following is an example showing how ExecuteEdits() could be used:

```
&REC.ExecuteEdits();  
If &REC.IsEditError Then  
    LogError(); /*application specific call */  
End-If;
```

Considerations for ExecuteEdits and SetEditTable

If an effective date is a key on the prompt table, and the record being edited doesn't contain an EFFDT field, the current date and time is used as the key value.

If a SETID is a key on the prompt table, and the record being edited doesn't contain a SETID field, the system looks for SETID on the other records in the current row first, then searches parent rows.

For all other keys, the value used to "select" the correct row in the prompt table record comes only from the record executing the method. No other records (or key field values) are used. You may get unexpected results if not all the keys for the prompt table are filled in (or filled in correctly.)

Considerations for ExecuteEdits and Numeric Fields

A zero (0) might or might not be a valid value for a numeric field. ExecuteEdits processes numeric fields in different ways, depending on whether the field is required:

- If the numeric field is required: 0 is considered invalid.
- If the numeric field is not required: 0 is considered valid.

Related Topics

- [SetEditTable method: Record class](#)
- [IsEditError property: Record class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

GetField method: Record class

Syntax

```
GetField({n | FIELD.fieldname})
```

Description

The GetField method instantiates a field object for the specified field associated with the record. This is the default method for the record object. This means that any record object, followed by a parameter list, acts as if GetField is specified.

 Note

If the field you're accessing has the same name as a record property (that is, Name or FieldCount) you can't use the default method for accessing the field. You must specify GetField.

For example, the following is invalid for accessing the value of a field called NAME:

```
&NUMBER = &REC.NAME.Value;
```

You must use the following code to get the value of a field called NAME:

```
&NUMBER= &REC.GetField(FIELD.NAME).Value;
```

Parameters

Parameter	Description
<i>n</i> FIELD. <i>fieldname</i>	Specify a field to be used for instantiating the field object. You can specify either <i>n</i> or FIELD. <i>fieldname</i> . Specifying <i>n</i> creates a field object for the <i>n</i> th field in the record. This might be used if writing code that needs to examine all fields in a record without being aware of the name. Specifying FIELD. <i>fieldname</i> creates a field object for the field <i>fieldname</i> .

 Note

There is no way to predict the order the fields will be accessed. Use the *n* option only if the order in which the fields are processed doesn't matter.

Returns

A field object.

Example

```
&REC.GetField(FIELD.CHARACTER).Value = "Hello";
```

As GetField is the default method for a record object, the following code is identical to the previous code:

```
&REC.CHARACTER.VALUE = "Hello";
```

The following code creates an array containing all the names of all the fields in a related language record.

```
Local array of string &FIELD_LIST_ARRAY;
&FIELD_LIST_ARRAY = CreateArray();
For &I = 1 to &REC_RELATED_LANG.FieldCount
    &FIELD_LIST_ARRAY.Push(&REC_RELATED_LANG.GetField(&I).Name);
End-For;
```

The GetField method requires either FIELD.fieldname or a number. It won't take a string field name. However, you can use the @ operator to convert the string field name into a FIELD.fieldname reference, as follows:

```
&REC = GetRecord();
&REC2 = GetLevel0(1).EMPL_CHECKLIST;
&FIELD2 = &REC.GetField(@ "FIELD." | &REC2.getfield(&I).Name);
```

The following code converts field name strings (using the @ symbol) to component names to get the value of all the fields in a subrecord. Note the code in Keyword style.

```
Function get_draft_dst_codes
/* Load dst id codes into record structures */
&DSTCODES = CreateRecord(RECORD.DR_DST_CODE_SBR);
&DRAFTITEM = GetRecord(RECORD.DRAFT_ITEM);
&DRAFTITEM.CopyFieldsTo(&DSTCODES);
/* If any missing get from AR dist code, then Draft Type-BU, then BU */
For &I = 1 To &DSTCODES.FieldCount
    If None(&DSTCODES.GetField(&I).Value) Then
        get_ar_dst_code();
        &NAME = &DSTCODES.GetField(&I).Name;
        If All(&DST.GetField(@ ("FIELD." | &NAME)).Value) Then
            &DSTCODES.GetField(&I).Value = &DST.GetField(@("FIELD." | =>
&NAME)).Value;
        Else
            If All(&R_DRAFTBU.GetField(@("FIELD." | &NAME)).Value) Then
                &DSTCODES.GetField(&I).Value = &R_DRAFTBU.GetField(@("FIELD." |
=>
&NAME)).Value;
            Else
                &DSTCODES.GetField(&I).Value = &R_ARBU.GetField(@("FIELD." | =>
&NAME)).Value;
            End-If;
        End-If;
    End-If;
End-For;
/* Copy the defaulted values back to draft item */
```



```
&DSTCODES.CopyFieldsTo(&DRAFTITEM);  
End-Function;
```

Related Topics

- PeopleCode Language Reference: GetField function

Insert method: Record class

Syntax

```
Insert()
```

Description

The Insert method uses the field names of the record and their values to build and execute an Insert SQL statement which adds the given record (row of data) to the SQL table.

Because this method results in a database change, it can only be issued in the following events:

- SavePreChange
- WorkFlow
- SavePostChange

If your application is repeating the same instruction many times, such as doing a million INSERTs, use the SQL object with the BulkMode property set to True, rather than the record SQL methods.

If you're using a record created using CreateRecord, all fields are initially set to "", 0, or NULL, depending on the type of field. If you don't specify values for these fields, these initial values are written to the database when the insert is executed. If you want the default values for the fields inserted instead, use the SetDefault method prior to using the Insert method.

For every record inserted with the Insert method, if the set language is not the base language and the record has related language records, the Insert method tries to do related language processing.

Parameters

None.

Returns

The result is True on successful completion, False if there was a record with those keys already in the database, that is, if a duplicate record was found. Any other conditions cause termination.

Example

Suppose that KEYF1 and KEYF2 are the key fields of record definition MYRECORD, and that this record definition also contains the field definitions MYRF3, MYRF4. The following code adds a MYRECORD record (row of data) to the database, with KEYF1 set to "A", KEYF2 set to "B", MYRF3 set to "X", and MYRF4 set to "Y":

```
Local record &REC;  
&REC = CreateRecord(RECORD.MYRECORD);
```

```
&REC.KEYF1.Value = "A";  
&REC.KEYF2.Value = "B";  
&REC.MYRF3.Value = "X";  
&REC.MYRF4.Value = "Y";  
&REC.Insert();
```

Related Topics

- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- Global Technology: Understanding Related Language Tables
- [SetDefault method: Record class](#)
- [Delete method: Record class](#)
- [SelectByKey method: Record class](#)
- [Update method: Record class](#)

Save method: Record class

Syntax

```
Save([CopyToOriginal])
```

Description

The Save method saves the record to the database in two steps.

1. Check to see that it is safe to save this record to the database.
2. Either insert this record or update an existing record.

To accomplish the first step and determine that it is safe to save the record, this method uses similar logic to that used in the component processor when it saves a record. To do that a “select for update” SQL statement is executed. If, as a result of this statement, the record does not exist in the database, this method simply inserts the record into the database. All the processing that occurs for the insert method then occurs.

If the result of the “select for update” statement returns a record, the values of all the fields in the database record are compared to the original values of the record executing this method. If they are equal, indicating that no other user has updated the record, the record in the database is updated. All the processing that occurs for the update method then occurs. If the result of the above comparison fails, indicating that there has been an update of the database record in the meantime, perhaps by some other user, the save method fails and returns a false result.

For the update process to succeed, the record object must contain both original and changed values of the data. It is crucial to get data loaded into the record object correctly. To do this, do one of the following:

- Derive the record object from the component buffers.
- Derive the record object from a rowset filled using the Fill method.
- Load the data using the record class SelectByKey and SelectByKeyEffdt methods specifying the optional Boolean parameter to be False.

See the note and example below.

Of course when you use `Save` to simply insert data you do not need load data into the record object this way.

Use this method when you are writing applications that do not use the facilities that come predelivered with the component processor and you must deal with issues of data contention.

For example, suppose you are writing an application that deals with course registration. You have to handle changing the number of students who are registered carefully if it is possible for more than one user to be registering for the same course at the same time. The normal way is to use the component processor to handle data contention by placing the record that deals with the number of students registering on some page. Then if two users try to update the same record one of them receives a message indicating that the page has been updated by another user.

If you write an application, outside the component processor, that relies on the record class to manage the number of students enrolled, it is not sufficient to use the record class `Insert` or `Update` methods to maintain data integrity. Suppose one user registers for the course and sees there are 10 other registrants. At the same time another user registers for the course and sees that there are also 10 registrants. Suppose the maximum is 11 students. Both users at this point believe they can register since at the point they accessed the data from the database there were only 10 students. So far, so good. The trouble comes when they save their registrations. If the application uses the update method, after simply adding one to the number of registrants, both updates will succeed indicating there are now 11 students in the course when in fact there are now 12. It is for cases such as these that the `Save` method applies since it guarantees that one of the save calls will fail. It is up to the application then to let the user know that while they were thinking about it someone else registered for the course and took the last spot.

The `Save` method is important to maintain data integrity. However, it can execute more slowly than saving within the component processor.

Since this method results in a database change, and does either insert or update processing, all the considerations and implications of using the `Insert` or `Update` methods apply. See the description of those methods for more detail.

The parameter *CopyToOriginal* indicates what action should occur on a successful save. If this parameter is true, the system copies the current changed buffers for the record into the original buffers for the record. This means that subsequent Saves, without reloading data from the database will run correctly. However if there are database specific updates to this record occurring outside of this application's control (such as, using database specific triggers,) it is always advisable to reload the data from the database.

The default value for this optional parameter is false, indicating that no update of the original buffers for this record occurs. If you are certain that there are no database updates occurring outside of your application's on save processing, you can specify this optional parameter to be true and save the overhead of having to reload the data for this record from the database. If you are unsure you should always reload the record data after calling the `Save` method.

Note

This method does *not* update fields marked as **System maintained** in the record definition in Application Designer.

Since this save is done outside the component processor save processing, no save processing PeopleCode that is associated with this record is executed.

Use of this method that results in an update, and requires that the data in the record object is such that both a before and after image of the data is kept. When the system loads data into the component buffers there is a concept of the “original data” (data loaded from the database) and “changed data” (data changed by the user or the application). This allows the system to determine when saving, whether the data has been changed by another user. If you use this method with record objects not derived from the component buffers you need to make sure that the data in the record object has both a before and after image otherwise the save method fails. Record objects derived from rowsets that have been populated using the Fill method will not produce an error. However if you load data into a record object using either the `SelectByKey` or `SelectByKeyEffdt` record class methods, you need to specify the *CopyToOriginal* parameter so the system will load the data into the original data buffers, not the changed data buffers. To do that specify the optional parameter to be `False`. See the example below.

Parameters

Parameter	Description
<i>CopyToOriginal</i>	Specify what action should occur on a successful save. This parameter takes a Boolean value: <code>true</code> , then the system copies the current changed buffers for the record into the original buffers for the record, <code>false</code> , the buffers are not copied. The default value is <code>false</code> .

Returns

The result is `True` on successful completion, `False` if there were no changed fields in the record or it was not safe to save this record (see above for details). Any other conditions cause termination.

Note

It is not possible to ignore the return code from the Save method in your PeopleCode.

Example

Suppose that `KEYF1` and `KEYF2` are the key fields of record definition `MYRECORD`, and that this record definition also contains the record field definitions `MYRF3`, `MYRF4`. The following code tries to save `MYRECORD` record in the database with `KEYF1` set to "A", `KEYF2` set to

"B", setting MYRF3 to "X" and MYRF4 to "Y". This example works with a brand new record object and results in an insert if successful.

```
/* First -- create a brand new record */
Local record &REC;
&REC = CreateRecord(RECORD.MYRECORD);
&REC.KEYF1.Value = "A";
&REC.KEYF2.Value = "B";

/* Second -- update values as needed */
&REC.MYRF3.Value = "X";
&REC.MYRF4.Value = "Y";
/* Finally save it */
if &REC.Save() then
    /* handle the successful return */
else
    /* handle the unsuccessful return message to user? Try again? */
end-if;
```

This example works with an existing record and results in an update if successful.

```
/* First - create the record and get the data from the db */
Local record &REC;
&REC = CreateRecord(RECORD.MYRECORD);
&REC.KEYF1.Value = "A";
&REC.KEYF2.Value = "B";
&REC.SelectByKey(False);
/* False retrieves data into the original, not changed buffers. */

/* Second - update values as needed */
&REC.MYRF3.Value = "X";
&REC.MYRF4.Value = "Y";
/* Finally save it */
if &REC.Save() then
    /* handle the successful return */
else
    /* handle the unsuccessful return - message to user? Try again? */
end-if;
```

Related Topics

- [Insert method: Record class](#)
- [Update method: Record class](#)
- Global Technology: Understanding Data Editing in Related Language Tables and Base Tables
- [Insert method: Record class](#)
- [Delete method: Record class](#)
- [SelectByKey method: Record class](#)
- [Update method: Record class](#)
- [SelectByKeyEffDt method: Record class](#)

SearchClear method: Record class

Syntax

```
SearchClear()
```

Description

The SearchClear method clears the field values for all search keys for a record.

Parameters

None.

Returns

None.

Example

```
Local Record &REC;  
  
&REC = GetRecord();  
&REC.SearchClear();
```

Considerations Using SearchClear and SearchDefault

The field property SearchDefault sets a field to its default value (if there is one) immediately after SearchInit PeopleCode finishes. SearchDefault overrides SearchClear. If you call SearchClear for a record, then use SearchDefault for a field, the field is set to its default value and the search key values for the rest of the record are cleared.

Related Topics

- [SearchDefault property: Field class](#)
- [SearchClear method: Field class](#)

SelectByKey method: Record class

Syntax

```
SelectByKey([UseChangedBuffers])
```

Description

The SelectByKey method uses the key field names of the record and their values to build and execute a Select SQL statement. The field values are then fetched from the database SQL table into the record object executing the method, and the Select statement is closed.

Note

You can't use this method in dynamic views.

If you don't specify all the key fields for a record, those you exclude are added to the Where clause with the condition equal to a blank value. If not all keys are set and more than one row is retrieved, you won't receive an error and SelectByKey won't fetch any data.

SelectByKey returns a single row of data. To fetch more than one row, use the SQL object.

For every record read by the SelectByKey method, if the set language is not the base language and the record has related language records, the SelectByKey method tries to do related language processing.

You can also select into a record using SQLExec and meta-SQL. For example, if you need to use SelectByKey with an effective date, you can use the meta-SQL %SelectByKeyEffDt in a SQLExec statement. In the following example, &RECOBJ is the name of a record created using the CreateRecord function.

```
SQLExec("%SelectByKeyEffDt(:1, :2)", &RECOBJ, %Date, &RECOBJ);
```

Parameters

Parameter	Description
<i>UseChangedBuffers</i>	Specify whether to retrieve the data into the changed or original buffers. The system keeps track of the original and changed values. This parameter takes a Boolean value: true, retrieve into the changed buffers, False, use the original buffers. The default value is true. That is, to retrieve the data into the changed buffers. To use this parameter with the Save method, it is important that data be loaded into the original buffers in order for the save logic to work. To do that specify a value of false for this parameter. See Save method: Record class.

Returns

The result is true on successful completion, false if the record was not found. Any other conditions cause termination.

If false is returned, the system resets the record values to their default values for scrolls that are not derived. If you do a manual insert afterwards (using the Insert method) you may insert a record with null keys.

Example

Suppose that KEYF1 and KEYF2 are the two key fields of record definition MYRECORD. The following code reads the database record that has KEYF1 equal to "A" and KEYF2 equal to "X" into the &REC record object:

```
Local record &REC;  
&REC = CreateRecord(RECORD.MYRECORD);
```

```
&REC.KEYF1.Value = "A";  
&REC.KEYF2.Value = "X";  
&REC.SelectByKey();
```

The following example verifies if the method completes successfully before using the Insert method.

```
if not &Rec.SelectByKey() then  
  
    /* Must duplicate this key field population before the Insert - else can  
    get⇒  
    'blank' row */  
  
    &Rec.KEY1.Value = ...;  
    &Rec.KEY2.Value = ....;  
    ....  
  
    &Rec.Insert();  
  
end-if;
```

Related Topics

- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- Global Technology: Understanding Data Editing in Related Language Tables and Base Tables
- PeopleCode Language Reference: SQLExec function
- [Delete method: Record class](#)
- [Insert method: Record class](#)
- [Update method: Record class](#)
- [Save method: Record class](#)

SelectByKeyEffDt method: Record class

Syntax

```
SelectByKeyEffDt(Date[, UseChangedBuffers])
```

Description

Use the SelectKeyByEffDt to build and execute a SQL Select statement to get the current effective row based on an "as of date". The field values are then fetched from the database SQL table into the record object executing the method, and the Select statement is closed.

Note

You can't use this method in dynamic views.

SelectByKeyEffDt returns a single row of data. To fetch more than one row, use the SQL object.

For every record read by the SelectByKeyEffDt method, if the set language is not the base language and the record has related language records, the SelectByKeyEffDt method tries to do related language processing. The system assumes that both the base table and the related language table are effective-dated and that the effective-date keys are the same in each.

To use other keys, more than just the effective date, use the SelectByKey Record class method.

Parameters

Parameter	Description
<i>Date</i>	Specify the "as of" date you want to use as the effective date for the Select statement.
<i>UseChangedBuffer</i>	Specify whether to retrieve the data into the changed or original buffers. The system keeps track of the original and changed values. This parameter takes a Boolean value: true, retrieve into the changed buffers, False, use the original buffers. The default value is true. That is, to retrieve the data into the changed buffers. To use this parameter with the Save method, it is important that data be loaded into the original buffers in order for the save logic to work. To do that specify a value of false for this parameter. See Save method: Record class.

Returns

The result is True on successful completion, False if the record was not found. Any other conditions cause termination.

If false is returned, the system resets the record values to their default values for scrolls that are not derived. If you do a manual insert afterwards (using the Insert method) you may insert a record with null keys.

Example

```
Local Record &Rec;  
Local any &Date;  
  
&Date = %Date;  
&Rec = CreateRecord(Record.COMPANY_TBL);  
&Rec.COMPANY.Value = "CCB";  
  
If &Rec.SelectByKeyEffDt(&Date) Then  
    &Out = &Rec.DESCR.Value | " as of " | &Rec.EFFDT.Value | "->" |⇒
```

```
&Rec.STREET1.Value;  
WinMessage("Found this company: " | &Out);  
Else  
WinMessage("Not there!");  
End-If;
```

Related Topics

- [Delete method: Record class](#)
- [Insert method: Record class](#)
- [Update method: Record class](#)
- [Save method: Record class](#)
- [SelectByKey method: Record class](#)
- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- Global Technology: Understanding Data Editing in Related Language Tables and Base Tables

SetDefault method: Record class

Syntax

```
SetDefault()
```

Description

SetDefault sets the value of every field in the record to a null value, or to a default, depending on the type of field.

- If this method is used against data from the Component buffers, the next time default processing occurs, it is set to its default value: either a default specified in its record field definition or one set programmatically by PeopleCode located in a FieldDefault event. If neither of these defaults exist, the Component Processor leaves the field blank.
- If this method is used with a field that isn't part of the data buffer (for example, a field in a record object instantiated with CreateRecord) the field is automatically set to its default value if one is set for the field, not for the record field. Any FieldDefault PeopleCode does not run on these types of fields. To set the default values for just one field, use the SetDefault field class method.

Blank numbers correspond to zero on the database. Blank characters correspond to a space on the database. Blank dates and long characters correspond to NULL on the database. SetDefault gives each field data type its proper value.

Parameters

None.

Returns

None.

Example

```
&CHARACTER.SetDefault();
```

Related Topics

- [SetDefault method: Field class](#)
- PeopleCode Developer's Guide: Default Processing

SetEditTable method: Record class

Syntax

```
SetEditTable(%PromptField, RECORD.recordname)
```

Description

The SetEditTable method works with the ExecuteEdits method. It sets the value of a field on a record that has its prompt table defined as *%PromptField* value. *%PromptField* values are used to dynamically change the prompt record for a field.

There are several steps to setting up a field so that you can dynamically change its prompt table.

To set up a field with a dynamic prompt table:

1. Define a field in the DERIVED record called *fieldname*.
2. In the record definition for the field you want to have a dynamic prompt table, define the prompt table for the field as *%PromptField*, where *PromptField* is the name of the field you created in the DERIVED record.

Note

When you use SetEditTable, you don't have to add a hidden field to the page.

3. Use SetEditTable to dynamically set the prompt table.

%PromptField is the name of the field on the DERIVED work record. RECORD.*recordname* is the name of the record to be used as the prompt table.

```
&REC.SetEditTable("%EDITTABLE1", Record.DEPARTMENT);  
&REC.SetEditTable("%EDITTABLE2", Record.JOB_ID);  
&REC.SetEditTable("%EDITTABLE3", Record.EMPL_DATA);  
&REC.ExecuteEdits();
```

Every field on a record that has the prompt table field %EDITTABLE1 will have the same prompt table, that is, DEPARTMENT.

See [ExecuteEdits method: Record class](#), Application Designer Developer's Guide: Understanding Record Definitions.

Parameters

Parameter	Description
<i>%PromptField</i>	Specifies the name of the field in the DERIVED record that has been defined as the prompt table for a field in the record definition.
<i>RECORD.recordname</i>	Specifies the name of the record definition that contains the correct standard system edits to be performed for that field in the record.

Returns

None.

Example

```
/* To Set the Prompt Table */
&Der_EditRec = &TSKPRF_Det_Row.GetRecord(Record.DERIVED);
&Prompt_Editname = &Der_EditRec.EDITTABLE.Value;
&Prompt_Edittable = "Record." | &Prompt_Editname;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE", @&Prompt_Edittable);

&Prompt_Editname2 = &Der_EditRec.EDITTABLE2.Value;
&Prompt_Edittable2 = "Record." | &Prompt_Editname2;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE2", @&Prompt_Edittable2);

&Prompt_Editname3 = &Der_EditRec.EDITTABLE3.Value;
&Prompt_Edittable3 = "Record." | &Prompt_Editname3;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE3", @&Prompt_Edittable3);

&Prompt_Editname4 = &Der_EditRec.EDITTABLE4.Value;
&Prompt_Edittable4 = "Record." | &Prompt_Editname4;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE4", @&Prompt_Edittable4);

&Prompt_Editname5 = &Der_EditRec.EDITTABLE5.Value;
&Prompt_Edittable5 = "Record." | &Prompt_Editname5;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE5", @&Prompt_Edittable5);

&Prompt_Editname6 = &Der_EditRec.EDITTABLE6.Value;
&Prompt_Edittable6 = "Record." | &Prompt_Editname6;
&TSKPRF_Det_Rec.SetEditTable("%EDITTABLE6", @&Prompt_Edittable6);
&TSKPRF_Det_Rec.ExecuteEdits(%Edit_Required + %Edit_PromptTable);
```

Considerations for SetEditTable and ExecuteEdits

The keys used to "select" the correct row in the prompt table record come only from the record object executing the method. All the keys from the component are not used. You may get unexpected results if not all the keys for the prompt table are filled in (or filled in correctly.)

Related Topics

- [ExecuteEdits method: Record class](#)
- [IsEditError property: Record class](#)
- [EditError property: Field class](#)

- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

Update method: Record class

Syntax

```
Update([KeyRecord])
```

Description

The Update method uses the changed fields of the record and their values to build and execute an Update SQL statement, updating the SQL table. If you are updating the key fields of the record, you must supply a record object *KeyRecord* that contains the old values of the key record fields.

Because this method results in a database change, it can only be issued in the following events:

- SavePreChange
- WorkFlow
- SavePostChange

If your application is repeating the same instruction many times, such as doing a million UPDATES, use the SQL object with the BulkMode property set to True, rather than the record SQL methods.

For every record updated by the Update method, if the set language is not the base language and the record has related language records, the Update method tries to do related language processing.

Note

This method does not update fields marked as **system maintained** in Application Designer.

Parameters

Parameter	Description
<i>KeyRecord</i>	If you're updating the key fields of the record, you must supply the old key field values in the record object <i>KeyRecord</i> .

Returns

The result is True on successful completion, False if the record was not found or (when updating the key fields) a duplicate record was found. Any other conditions cause termination.

Example

Suppose that KEYF1 and KEYF2 are the key fields of record definition MYRECORD, and that this record definition also contains the record field definitions MYRF3, MYRF4. The following

code updates the MYRECORD record in the database with KEYF1 set to "A", KEYF2 set to "B", setting MYRF3 to "X" and MYRF4 to "Y":

```
Local record &REC;  
&REC = CreateRecord(RECORD.MYRECORD);  
&REC.KEYF1.Value = "A";  
&REC.KEYF2.Value = "B";  
&REC.MYRF3.Value = "X";  
&REC.MYRF4.Value = "Y";  
&REC.Update();
```

This code updates the MYRECORD record in the database with KEYF1 of "A" and KEYF2 of "B", setting KEYF2 to "C", MYRF3 to "M" and MYRF4 to "N":

```
Local record &REC1, &REC2;  
&REC1 = CreateRecord(RECORD.MYRECORD);  
&REC2 = CreateRecord(RECORD.MYRECORD);  
&REC1.KEYF1.Value = "A";  
&REC1.KEYF2.Value = "B";  
&REC2.KEYF1.Value = "A";  
&REC2.KEYF2.Value = "C";  
&REC2.MYRF3.Value = "M";  
&REC2.MYRF4.Value = "N";  
&REC2.Update(&REC1);
```

Related Topics

- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- Global Technology: Understanding Data Editing in Related Language Tables and Base Tables
- [Delete method: Record class](#)
- [SelectByKey method: Record class](#)
- [Insert method: Record class](#)

Record Class Properties

In this section, we discuss the Record class properties. The properties are listed in alphabetical order.

FieldCount property: Record class

Description

This property returns the total number of fields contained in the record. This value is a number.

This property is read-only.

Example

```
WinMessage("This record has this many fields : " | &REC.FieldCount);
```

fieldname property: Record class

Description

If a field name is used as a property, it accesses the field object with that name. This means the following code:

```
&REC.fieldname
```

acts the same as

```
&REC.GetField(FIELD.fieldname);
```

Note

If the field you're accessing has the same name as a record property (such as, Name) you can't use this method for accessing the field. You must use the GetField method.

If you combine the *fieldname* property with the *recname* property, you obtain the specified field object associated with that record from the row.

```
&ROW.recname.fieldname
```

This property is read-only.

Example

```
&REC.CHARACTER.Enabled = True;
```

IsChanged property: Record class

Description

This property returns True if any field value on the primary database record of the row has been changed.

Note

This property is for use only with the primary database record. It does not return valid results if used with a work record.

This property is read-only.

Example

```
If &REC.IsChanged Then  
    Warning("This Record has been changed");  
End-if;
```

Considerations Using IsChanged

This property and the IsChanged row property do not always return identical values.

If a row in a scroll contains multiple records (such as a primary database record and one or more work records), the IsChanged row property returns True if any of the records in the row are changed. The IsChanged record property returns True only if a specific record, namely, the primary database record, is changed.

If a row is deleted from a scroll, only the primary database record has its IsChanged property marked to False (since the row has been deleted.) Any work records in the row still have their IsChanged properties set to True.

IsDeleted property: Record class

Description

This property is True if the record has been deleted. For a level zero record, it is possible for a record to be deleted without the whole row being deleted. For other levels, this property is the same as the row property IsDeleted.

This property is read-only.

Example

```
&tmp = &REC.IsDeleted;
```

Related Topics

- [IsDeleted property: Row class](#)

IsEditError property: Record class

Description

This property is True if an error has been found for any field associated with the record after executing the ExecuteEdits method. This property can be used with the Field class properties EditError (to find out which field is in error), and MessageSetNumber and MessageNumber to find the error message set number and error message number.

The IsEditError property returns True when a field with a Null value is encountered.

This property is read-only.

Example

The following is an example showing how `IsEditError`, along with the `ExecuteEdits` method could be used:

```
&REC.ExecuteEdits();
If &REC.IsEditError Then
  For &I = 1 to &REC.FieldCount
    If &REC.GetField(&I).EditError Then
      LOG_ERROR(); /* application specific call */
    End-If;
  End-For;
End-If;
```

Related Topics

- [ExecuteEdits method: Record class](#)
- [IsEditError property: Record class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

Name property: Record class

Description

This property returns the name of the record definition of the record as a string.

To access an SQL table name for a record, use the `%Table` meta-SQL construct.

This property is read-only.

Example

```
WinMessage("The name of this record is : " | &REC.Name);
```

Related Topics

- PeopleCode Language Reference: `%Table` meta-SQL element

ParentRow property: Record class

Description

This property returns the row object for the row containing the record. If the record object was created with the `CreateRecord` built-in function, the value for `ParentRow` is null because the record object isn't part of a row.

This property is read-only.

Example

```
&ROWOBJECT = &REC.ParentRow;  
    &TMP = "The row number of the parent row is " | &ROWOBJECT.RowNumber;  
/* note that RowNumber is a property of the row class */
```

Related Topics

- PeopleCode Language Reference: CreateRecord function

RelLangRecName property: Record class

Description

This property returns the name of the related language record as a string. The value will be a null string ("") if there is no related language record.

Example

```
Local Record &REC;  
  
&REC = GetRecord();  
&RECNAME_BASE = &REC.Name;  
&RELLANGRECNAME = &REC.RelLangRecName;  
SQLEXec("select RELLANGRECNAME from PSRECDEFN where RECNAME = :1",  
&RECNAME_BASE,⇒  
&RELLANGRECNAME);
```

SystemIDFieldName property: Record class

Description

① Note

PeopleSoft Mobile Agent is a desupported product. This mobile property currently exists for backward compatibility only.

This property returns the name of the System ID field as a string. If there is no defined value (the default) the value is a null string ("").

This property accesses the System ID field name value specified on the Use tab of the Record Properties dialog box.

The System ID field is used to create a unique way to identify the record for mobile synchronization purposes. This property is used exclusively for mobile applications. This property is not available for subrecords.

This property is read-only.

Example

```
Local Record &REC;  
  
&REC = GetRecord();  
&sSystemID = &REC.SystemIDFieldName;
```

Related Topics

- [TimeStampFieldName property: Record class](#)
- Application Designer Developer's Guide: Setting Record Properties

TimeStampFieldName property: Record class

Description

Note

PeopleSoft Mobile Agent is a desupported product. This mobile property currently exists for backward compatibility only.

This property returns the name of the Timestamp field as a string. If there is no defined value (the default) the value is a null string ("").

This property accesses the Timestamp field name value specified on the Use tab of the Record Properties dialog box.

The Timestamp field is used to specify a field that is automatically updated with the date and time when there's a change to the record. This property is used exclusively for mobile applications.

This property is not available for subrecords. This property is read-only.

Example

```
Local Record &REC;  
  
&REC = GetRecord();  
&sTimeStamp = &REC.TimeStampFieldName;
```

Related Topics

- [SystemIDFieldName property: Record class](#)
- Application Designer Developer's Guide: Setting Record Properties

Row Class

Understanding Row Class

A row object, instantiated from the Row class, is a single row of data that consists of one to n records of data. A single row in a component scroll is a row.

A row object is always associated with a rowset object, that is, you cannot instantiate a row object without first either explicitly or implicitly instantiating a rowset object.

A row may have one to n child rowsets. For example, a row in a level two scroll may have n level three child rowsets.

CopyTo and GetRecord are two commonly use methods for this class. Visible and IsChanged are two commonly used properties for this class.

The row class is one of the data buffer access classes.

If a rowset object is instantiated using the CreateRowset function, the rowset object that's instantiated is a standalone rowset. Delete and insert activity on these types of rowsets aren't automatically applied at save time. Use standalone rowsets for work records.

Related Topics

- PeopleCode Developer's Guide: Understanding Data Buffer Access
- PeopleCode Developer's Guide: Using Standalone Rowsets

Shortcut Considerations

The default method for the row class is GetRecord. This means you can specify just a record name to access a record on the row. For example, the following two lines of code are equivalent:

```
&Count = &MyRow.EMPL_CHECKLIST.FieldCount;
```

```
&Count = &MyRow.GetRecord(RECORD.EMPL_CHECKLIST).FieldCount;
```

In addition, the row class has a method *scrollname*. This enables you to access a specific child rowset *and* row within that rowset. This isn't a default method: you're not accessing a child object, but rather, something within that object. For example, the following two lines of code are equivalent:

```
&ChildRow = &MyRow.EMPL_CHKLIST_ITM(&I);
```

```
&ChildRow = &MyRow.GetRowset(SCROLL.EMPL_CHKLIST_ITM).GetRow(&I);
```

Data Type of a Row Object

Row objects are declared as type Row. For example,

```
Local Row &MYROW;
```

Scope of a Row Object

A Row can only be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, Component Interface PeopleCode, and so on.

Row Class Built-in Function

PeopleCode Language Reference: GetRow function

Row Class Methods

In this section, we discuss each Row class method. The methods are discussed in alphabetical order.

CopyTo method: Row class

Syntax

```
CopyTo(&row)
```

Description

The CopyTo method copies *from* the row executing the method *to* the specified target row, copying *like-named* record fields and subscrolls at corresponding levels. The target Row object must be from a "related" rowset—that is, built from the same records—but it can be under a different parent at higher levels.

This method copies *all* the records from the Row object executing the method to the target Row object, not just the primary data record associated with the rowset.

In order to copy all of the properties of the fields from the source row, the source and target scrolls must have exactly the same shape:

- The names of the records in the source and target scrolls must be the same.
- If there are subscrolls in the source scroll, then the same number of subscrolls must exist in the target scroll.
- The names of the records in any source subscrolls and target subscrolls must be the same.

Parameters

Parameter	Description
<i>row</i>	Specify a target row. This must be a Row object, not a row number.

Returns

None

Example

The following example copies rows from a child rowset (DERIVED_HR) to the current rows.

```
Local Row &ROW;  
Local Rowset &RS1;  
  
&RS1 = GetRowset();  
For &I = 1 to &RS1.ActiveRowCount  
    &ROW = GetRowset(SCROLL.DERIVED_HR).GetRow(&I);  
    &ROW.CopyTo(GetRow(&I));  
End-For;
```

Related Topics

- [ParentRowset property: Row class](#)
- [CopyFieldsTo method: Record class](#)
- [CopyChangedFieldsTo method: Record class](#)

GetNextEffRow method: Row class

Syntax

```
GetNextEffRow()
```

Description

The GetNextEffRow method finds the row, in the same rowset as the row executing the method, that has the next effective date (when compared to the row executing the method.)

Parameters

None

Returns

A row object. If there is no row with a later effective date, this method returns a null object.

Example

```
&ROW2 = &ROW.GetNextEff();  
  
If &ROW2 <> NULL Then
```

```
&TMP = &ROW2.RowNumber;  
/* other processing */  
Else  
/* no effective dated row - do error processing */  
End-if;
```

Related Topics

- [GetPriorEffRow method: Row class](#)
- [GetCurrEffRow method: Rowset class](#)
- [DeleteEnabled property: Rowset class](#)

GetPriorEffRow method: Row class

Syntax

```
GetPriorEffRow()
```

Description

The `GetPriorEffRow` method finds the row, from the same rowset as the row executing the method, that has the prior effective date to the row executing the method.

Parameters

None

Returns

A row object. If there is no row with a prior effective date, this method returns a null object.

Example

```
&TMP = &ROW.GetPriorEffrow().RowNumber;
```

Related Topics

- [GetNextEffRow method: Row class](#)
- [GetCurrEffRow method: Rowset class](#)
- [DeleteEnabled property: Rowset class](#)

GetRecord method: Row class

Syntax

```
GetRecord({n | RECORD.recname})
```

Description

The `GetRecord` method creates a record object that references the specified record within the current row object. This is the *default method* for a row object. This means that any row object, followed by a parameter list, acts as if `GetRecord` is specified.

Parameters

Parameter	Description
<i>n</i> <code>RECORD.recname</code>	Specify a record to be used for instantiating the record object. You can specify either <i>n</i> or <code>RECORD.recname</code> . Specifying <i>n</i> creates a record object for the <i>n</i> th record in the row. This might be used if writing code that needs to examine all records in a row without being aware of the record name. Specifying <code>RECORD.recname</code> creates a record object for the record <i>recname</i> .

Note

There is no way to predict the order the records will be accessed. Use the *n* option only if the order in which the records are processed doesn't matter.

Returns

A record object.

Example

The following example gets a record, then assigns the name of the record to the variable `&TMP`:

```
&REC = &ROW.GetRecord(RECORD.QEPC_LEVEL1_REC);

&TMP = &REC.NAME; /* note that NAME is a property of the record class */
```

Because `GetRecord` is the default method for a row, the following code is identical to the previous:

```
&REC = &ROW.QEPC_LEVEL1_REC;

&TMP = &REC.NAME;
```

The following example loops through all the records for a row:

```
Local rowset &LEVEL1;
Local row &ROW;
Local record &REC;

&LEVEL1 = GetRowset(SCROLL.EMPL_CHECKLIST);
For &I = 1 to &LEVEL1.ActiveRowCount
    &ROW = &LEVEL1.GetRow(&I);
    For &J = 1 to &ROW.RecordCount
        &REC = &ROW.GetRecord(&J);
        /* do processing */
    End-For;
End-For;
```


The following function takes a rowset and a record, passed in from another program. GetRecord won't take a variable for the record, however, using the @ symbol you can convert the string to a component record name.

```
Function Get_My_Row(&PASSED_ROWSET, &PASSED_RECORD)
  For &ROWSET_ROW = 1 To &PASSED_ROWSET.RowCount
    &UNDERLYINGREC = "RECORD." | &PASSED_ROWSET.DBRecordName;
    &ROW_RECORD =
&PASSED_ROWSET.GetRow(&ROWSET_ROW).GetRecord(@&UNDERLYINGREC);
    /* Do other processing */
  End-For;
End-Function;
```

Related Topics

- PeopleCode Language Reference: GetRecord function
- PeopleCode Language Reference: CreateRecord function

GetRowset method: Row class

Syntax

```
GetRowset({n | SCROLL.scrollname})
```

Description

The GetRowset method creates a rowset object that references a child rowset of the current row. *scrollname* must specify the primary record for the child rowset.

Parameters

Parameter	Description
<i>n</i> SCROLL. <i>scrollname</i>	Specify a rowset to be used for instantiating the rowset object. You can specify either <i>n</i> or SCROLL. <i>scrollname</i> . Specifying <i>n</i> creates a rowset object for the <i>n</i> th child rowset in the row. This might be used if you are writing code that examines all rowsets in a row without being aware of the name. Specifying SCROLL. <i>scrollname</i> creates a rowset object for the record <i>scrollname</i> . <i>scrollname</i> must specify the primary record for the child rowset.

Note

There is no way to predict the order the rowsets will be accessed. Use the *n* option only if the order in which the rowsets are processed doesn't matter.

Returns

A rowset object.

Example

```
&CHILDROWSET = &ROW.GetRowset(SCROLL.QEPC_LEVEL1_REC);
```

Related Topics

- [scrollname method: Row class](#)
- PeopleCode Language Reference: GetRowset function

scrollname method: Row class

Syntax

scrollname(*n*)

Description

If *scrollname* is used as a method name for a row, it is used to select a child rowset and a row within that rowset.

```
&ROW.scrollname(n)
```

acts the same as

```
&ROW.GetRowset(SCROLL.scrollname).GetRow(n)
```

Parameters

Parameter	Description
<i>n</i>	Must be a valid row number for the selected child rowset.

Returns

A row object.

Example

```
&SUBROW1 = &ROW.QEPC_LEVEL1_REC(1);
```

Related Topics

- PeopleCode Language Reference: GetRowset function

Row Class Properties

In this section, we discuss the Row class properties. The properties are discussed in alphabetical order.

ChildCount property: Row class

Description

This property returns the number of child rowsets of the row. It is defined by the "structure" of the scroll, so it is the same for all rows of the rowset.

It might be used, in conjunction with the `GetRowset` method, to write code that examines all child rowsets.

This property is read-only.

Example

```
For &I = 1 to &ROW.ChildCount
    &ROWSET = &ROW.GetRowset(&I);
    /* do processing */
End-For;
```

DeleteEnabled property: Row class

Description

This property determines whether a row can be deleted (the equivalent of the user pressing ALT+8 and ENTER). This property takes a Boolean value.

Note

This property controls only whether an end-user can delete a row. Rows can still be deleted using PeopleCode.

This property is typically used to prevent deletion of an individual row that the other properties controlling deletion would allow to be deleted. The following table goes through the Boolean logic.

Will delete be allowed by user?	Others enable	Others disable
DeleteEnabled = True	Yes	No
DeleteEnabled = False	No	No

The initial value of this property is True.

Note

If No Row Delete is selected in Application Designer, setting the DeleteEnabled row property to True will *not* override this value. If you want to control whether a row can be deleted at runtime, you should *not* select No Row Delete at design time. Likewise, if the DeleteEnabled Rowset property is False, setting the DeleteEnabled Row property to True will *not* override the rowset property. If you want to control whether an individual row can be deleted at runtime, you should not set the DeleteEnabled rowset property to False.

For consistency, PeopleSoft recommends that either all rows at a level should disable deletions, or they should all allow deletions.

For rows created with non-Component Processor data (such as message rowsets, Application Engine rowsets, and so on) this property has no effect.

Note

Don't use this property with rows from rowsets created using CreateRowset. Rowsets created using the CreateRowset function are standalone rowsets, not tied to the database, so there are no database updates when they are manipulated. Delete and insert activity on these types of rowsets aren't automatically applied at save time.

This property is read/write.

Related Topics

- [DeleteEnabled property: Rowset class](#)
- Application Designer Developer's Guide: Using Scroll Areas and Scroll Bars
- PeopleCode Developer's Guide: Using Standalone Rowsets

IsChanged property: Row class

Description

This property returns True if any field value on the primary database record of the row has been changed.

Note

Use this property only with the primary database record. It doesn't return valid results if used with a work record. This property returns True only if the existing row object has a field that has changed. If a field in a lower level rowset has changed, this property returns False.

This property is read-only.

Example

```
&tmp = &ROW.IsChanged;  
if &tmp = True then  
    Warning("A Field on this row has been changed");  
End-If;
```

Considerations Using IsChanged

This property and the IsChanged record property do *not* always return identical values.

If a row in a scroll contains multiple records (such as a primary database record and one or more work records), the IsChanged row property returns True if *any* of the records in the row are changed. The IsChanged record property returns True *only* if a specific record, namely, the primary database record, is changed.

If a row is deleted from a scroll, *only* the primary database record has its IsChanged property marked to False (since the row has been deleted.) Any work records in the row *still* have their IsChanged properties set to True.

IsDeleted property: Row class

Description

This property returns True if the row has been deleted.

This property is read-only.

Note

This property also returns True if the row is new and hasn't been changed.

Example

```
&tmp = &ROW.IsDeleted;
```

IsEditError property: Row class

Description

This property is True if an error has been found for any field associated with any record in the current row or on any row in any child rowset of the current row after executing the ExecuteEdits method. This property can be used with the Field class properties EditError (to find out which field is in error), and MessageSetNumber and MessageNumber to find the error message set number and error message number.

This property is read-only.

Example

The following is an example showing how `IsEditError`, along with the `ExecuteEdits` method could be used:

```
&MSG.ExecuteEdits();
If &MSG.IsEditError Then
&RS = &MSG.GetRowset();
  For &J = 1 to &RS.RowCount
    &ROW = &RS.GetRow(&J);
    If &ROW.IsEditError Then
      &REC = &ROW.GetRecord();
      For &I = 1 to &REC.FieldCount
        If &REC.GetField(&I).EditError Then
          LOG_ERROR(); /* application specific call */
        End-If;
      End-For;
    End-If;
  End-For;
End-If;
```

Related Topics

- [ExecuteEdits method: Record class](#)
- [IsEditError property: Record class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

IsNew property: Row class

Description

This property is True if the row is a new (inserted) row.

This property is read-only.

Example

```
&tmp = &ROW.IsNew;
```

ParentRowset property: Row class

Description

This property returns a rowset object referencing the rowset containing the row.

This property is read-only.

Example

```
&tmp = &ROW.ParentRowset.RowCount;  
  
/* note that rowcount is a property of the Rowset class */
```

recname property: Row class

Description

If a record name is used as a property, it accesses the record object with that name. This means the following code:

```
&ROW.somerecname
```

acts the same as

```
&ROW.GetRecord(RECORD.somerecname);
```

This property is read-only.

Example

```
&REC = &ROW.QEPC_LEVEL1_REC;
```

RecordCount property: Row class

Description

This property returns the number of records in the row. It is defined by the "structure" of the scroll, so it is the same for all rows of the rowset.

This property might be used in conjunction with the GetRecord method to write code that examines all records in some way.

This property is read-only.

Example

```
For &I = 1 to &ROW.RecordCount  
    &REC = &ROW.GetRecord(&I);  
    /* do processing */  
End-For;
```

RowNumber property: Row class

Description

This property returns the row number (starting from 1) of the row within its rowset.

This property is read-only.

Example

The following returns the row number of the current effective-date row.

```
&NUMBER = GetRowset(SCROLL.MYRECORD).GetCurrEffRow().RowNumber;
```

Selected property: Row class

Description

This property returns True if the row is part of a grid and has been selected either by the user or programmatically.

This property is meaningful in PIA only if the grid or scroll area attribute has been set to provide the selection control. In this case, the property reflects the state of the check box or radio button used for selection.

This property is read/write.

Example

The following example determines how many rows in a grid are selected.

```
Function Count_Child_Assets(&GRIDLEVEL1 As Rowset, &NUM_CHILDREN)
    REM *** How many child assets are selected? *;
    &GRIDLEVEL1 = GetRowset(SCROLL.PARENT_CHILD_VW);
    For &CHILDROW_COUNT = 1 To &GRIDLEVEL1.ActiveRowCount
        If &GRIDLEVEL1.GetRow(&CHILDROW_COUNT).Selected = True Then
            &NUM_CHILDREN = &NUM_CHILDREN + 1;
        End-If;
    End-For;
End-Function;
```

Style property: Row class

Description

This property returns the name of the style class if one has been set for the row. You can also use this property to change the style of a row. This property takes a string value.

Note

This property *overrides* only the existing style. It doesn't *change* it. The next time the page is accessed the original style is used.

The PSSTYLE style sheet does *not* contain a default style class for a row. The Style property for all rows is initially NULL (that is, two quotation marks with no space between them ("")). The row assumes the style of the grid alternate row style. Fields in the row assume field styles if set.

Setting the property for a row overrides the grid alternate row style and any page field styles (field styles that were set in Application Designer). It does *not* override any field styles set (using the Field class Style property) for fields in the row.

Setting the Style property back to NULL (that is, two quotation marks with no space between them ("")) turns off the override.

Note

This property is *not* valid for Windows Client applications.

Example

```
&Scroll = GetLevel0().GetRow(1).GetRowset(Scroll.IC_PC_STYLE_2);  
  
&row_class = &Scroll.GetRow(&row);  
  
&row_class.Style = &style;
```

Related Topics

- [Style property: Field class](#)
- Application Designer Developer's Guide: Understanding Field Definitions

Visible property: Row class

Description

If this property is True, the row is visible if displayed on the current page. This property can be set False to hide the row.

When Visible is set to False to hide a row, the row moves to the end of the rowset. This means that the row number of the row being hidden, and any subsequent rows, *changes* as a result of hiding a row. If the row is later made visible again, it is *not* moved back to its original position, but remains at the end of the rowset. It is just moved to the start of all the other hidden rows.

For example, if there are 4 rows in a rowset and row 2 is hidden (that is, Visible = False), that row now becomes row 4. In order to make that row visible again, row 4 must be set to Visible = True. Alternatively, you can use a row object reference: this remains valid even though the row number of the row may have been changed.

Note

If you use the Sort method on a rowset with hidden rows, the hidden rows aren't sorted. Only visible rows are sorted.

You cannot hide rows in the current context of the executing program. This means Visible cannot hide the row containing the executing program, or in a child rowset and be executed against its parent rowset. Place your PeopleCode in a parent rowset and execute it against a child rowset.

Example

```
&ROW.Visible = False;
```

The following code uses the `Visible` property to determine if a row is visible or not before updating the value of the row.

```
&ROWSET = GetRowset(SCROLL.LD_SHP_INV_VW)
```

```
For &I = 1 To &ROWSET.ActiveRowCount  
    If &ROWSET(&I).Visible Then  
        ITEM_SELECTED.value = "N";  
    End-If;  
End-For;
```

The following code starts with the last row and works forward to the first. If any changes are made they don't impact the position of rows that still have to be processed.

```
For &I = &ACTIVE_STREAMS to 1 Step -1  
    &Row = &STREAM_ROWSET(&I);  
    If &Row.QS_STREAM8.STREAM_ROOT_ID.Value <> &STREAM_ROOT_ID Then  
        &Row.Visible = False;  
    End-if;  
End-For;
```

Related Content Framework Classes

Understanding the Related Content Framework Classes

The PeopleCode API for the related content framework consists of the following application packages and classes:

- **PTCS_SRVDEFN:**
 - **RCServicesDefinition** class
Use the PTCS_SRVDEFN:RCServicesDefinition class to manage related content service definitions.
 - **RCPParameter** class
Use the PTCS_SRVDEFN:RCPParameter class to manage URL parameters associated with related content service definitions.
 - **PTCS_SERVICE:**
Use the PTCS_SERVICE:RCServices application class to manage all related content service configurations (PTCS_SRVCONFIG:RCServicesConfig) for a given component or pivot grid.
 - **PTCS_SRVCONFIG:**
 - **RCServicesConfig** class
Use the PTCS_SRVCONFIG:RCServicesConfig class to manage service configurations for related content for classic components and fluid components; for related actions for classic components, fluid components, and pivot grids; and for mapping custom PeopleCode application classes to component events.
- Note**

The RCServicesConfig class does not support managing related action configurations for MAP layouts.
- **RCSMapFields** class
Use the PTCS_SRVCONFIG:RCSMapFields class to map page contextual fields to the URL parameters of the service definition.
 - **PTCS_MENULAYOUT:**
 - **RCSMenuLayout** class
Use the PTCS_MENULAYOUT:RCSMenuLayout class to manage menu layouts for related content and related actions.
 - **RCSMenuFolder** class
Use the PTCS_MENULAYOUT:RCSMenuFolder class to manage menu folders for related content and related actions.

- RCMenuLink class

Use the PTCS_MENULAYOUT:RCMenuLink class to manage the menu links for related content and related actions.

RCServiceDefinition Class

Use the PTCS_SRVDEFN:RCServiceDefinition class to maintain related content service definitions. Use the methods and properties of this class to create, update, and delete service definitions.

Related Topics

- Portal Technology: Creating and Managing Related Content Service Definitions
- [RCParameter Class](#)
Use the RCParameter class to maintain the properties of service URL parameters for related content service definitions. Do not instantiate a PTCS_SRVDEFN:RCParameter object directly. Instead, use the AppendRCParam or GetRCParameter methods of the PTCS_SRVDEFN:RCServiceDefinition class to instantiate and return a RCParameter object.

RCServiceDefinition Class Methods

In this section, the RCServiceDefinition class methods are presented in alphabetical order.

AppendRCParam method: RCServiceDefinition class

Syntax

```
AppendRCParam(name)
```

Description

Use the AppendRCParam method to add a service URL parameter by name to the related content service definition.

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the service URL parameter as a string value.

Returns

A PTCS_SRVDEFN:RCParameter object.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");
```

```
Local string &rcParam1 = "APPTTEST_PARAM1";  
Local PTCS_SRVDEFN:RCPARAMETER &rcParam1Ret =  
&rcServDefn.AppendRCPARAM(&rcParam1);  
Local boolean &Ret = &rcServDefn.Save();
```

Related Topics

- [DeleteRCPARAM method: RCSERVICEDEFINITION class](#)
- [Save method: RCSERVICEDEFINITION class](#)
- [RCPARAMETER Class](#)
Use the RCPARAMETER class to maintain the properties of service URL parameters for related content service definitions. Do not instantiate a PTCS_SRVDEFN:RCPARAMETER object directly. Instead, use the AppendRCPARAM or GetRCPARAMETER methods of the PTCS_SRVDEFN:RCSERVICEDEFINITION class to instantiate and return a RCPARAMETER object.

CloneForNew method: RCSERVICEDEFINITION class

Syntax

```
CloneForNew(&RCSrvDefn)
```

Description

Use the CloneForNew method to create an identical copy of the related content service definition executing this method.

Parameters

Parameter	Description
<i>&RCSrvDefn</i>	Specifies an already instantiated PTCS_SRVDEFN:RCSERVICEDEFINITION object that is to be copied to.

Returns

A boolean value: True if the copy is successful, False otherwise.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCSERVICEDEFINITION &rcServDefn;  
Component PTCS_SRVDEFN:RCSERVICEDEFINITION &rcCloneServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCSERVICEDEFINITION("SERVICE_DEFN", "ENG");  
&rcCloneServDefn = create  
PTCS_SRVDEFN:RCSERVICEDEFINITION("NEW_SERVICE_DEFN", "ENG");  
Local boolean &bRet = False;  
If ( True = &rcServDefn.CloneForNew(&rcCloneServDefn) ) Then  
    &bRet = &rcCloneServDefn.Save();  
End-If;
```

Related Topics

- [Save method: RCServicesDefinition class](#)

Delete method: RCServicesDefinition class

Syntax

```
Delete()
```

Description

Use the Delete method to delete this related content service definition.

Parameters

None.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServicesDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServicesDefinition("SERVICE_DEFN", "ENG");  
Local boolean &bRet = False;  
If (&rcServDefn <> Null) Then  
    &bRet = &rcServDefn.Delete();  
End-If;
```

DeleteRCPParam method: RCServicesDefinition class

Syntax

```
DeleteRCPParam(nItem)
```

Description

Use the DeleteRCPParam method to delete the *n*th service URL parameter from the related content service definition.

Parameters

Parameter	Description
<i>nItem</i>	Specifies which service URL parameter as a number value.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
Local boolean &delRcParamRet = False;  
Local number &rcParamCount = &rcServDefn.GetRcParamCount();  
&delRcParamRet = &rcServDefn.DeleteRcParam(&rcParamCount - 1);  
If ( True = &delRcParamRet) Then  
    /* do some processing */  
    Local boolean &Ret = &rcServDefn.Save();  
End-If;
```

Related Topics

- [AppendRcParam method: RCServiceDefinition class](#)
- [GetRcParamCount method: RCServiceDefinition class](#)
- [GetRcParameter method: RCServiceDefinition class](#)
- [Save method: RCServiceDefinition class](#)

GetRcParamCount method: RCServiceDefinition class

Syntax

```
GetRcParamCount()
```

Description

Use the GetRcParamCount method to return the number of service URL parameters defined for this related content service definition.

Parameters

None.

Returns

A number value.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
Local number &rcParamCount = &rcServDefn.GetRcParamCount();  
If (&rcParamCount > 0) Then  
    /* do some processing */  
End-If;
```

Related Topics

- [AppendRCParam method: RCServicesDefinition class](#)
- [DeleteRCParam method: RCServicesDefinition class](#)
- [GetRCParameter method: RCServicesDefinition class](#)

GetRCParameter method: RCServicesDefinition class

Syntax

GetRCParameter(*nItem*)

Description

Use the GetRCParameter method to return a PTCS_SRVDEFN:RCParameter object representing the *n*th parameter of this related content service definition.

Parameters

Parameter	Description
<i>nItem</i>	Specifies which service URL parameter as a number value.

Returns

A PTCS_SRVDEFN:RCParameter object.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServicesDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServicesDefinition("SERVICE_DEFN", "ENG");  
Local number &rcParamCount = &rcServDefn.GetRCParamCount();  
Local PTCS_SRVDEFN:RCParameter &rcSvcParam =  
&rcServDefn.GetRCParameter(&rcParamCount);  
If ( Null <> &rcSvcParam) Then  
    /* do some processing */  
End-If;
```

Related Topics

- [AppendRCParam method: RCServicesDefinition class](#)
- [DeleteRCParam method: RCServicesDefinition class](#)
- [GetRCParamCount method: RCServicesDefinition class](#)
- [RCParameter Class](#)
Use the RCParameter class to maintain the properties of service URL parameters for related content service definitions. Do not instantiate a PTCS_SRVDEFN:RCParameter object directly. Instead, use the AppendRCParam or GetRCParameter methods of the PTCS_SRVDEFN:RCServicesDefinition class to instantiate and return a RCParameter object.

RCServiceDefinition method: RCServiceDefinition class

Syntax

```
RCServiceDefinition(service_ID, lang_CD)
```

Description

Use the RCServiceDefinition constructor method to instantiate a PTCS_SRVDEFN:RCServiceDefinition object. Use the IsNew property to determine whether the object was instantiated from an existing service definition (that is, the *service_ID* parameter corresponds to an existing definition) or as a new service definition.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies the unique identifier for the service definition as a string value.
<i>lang_CD</i>	Specifies the language code for this definition as a three-character string.

Returns

A PTCS_SRVDEFN:RCServiceDefinition object.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");
```

Related Topics

- [Save method: RCServiceDefinition class](#)
- [IsNew property: RCServiceDefinition class](#)
- [LanguageCD property: RCServiceDefinition class](#)

Rename method: RCServiceDefinition class

Syntax

```
Rename(new_srvc_ID)
```

Description

Use the Rename method to rename the related content service definition.

Parameters

Parameter	Description
<i>new_srvc_ID</i>	Specifies the new service ID as a string value.

Returns

A boolean value: True if the rename is successful, False otherwise.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
Local boolean &bRet = False;  
If ( True = &rcServDefn.Rename("NEW_SERVICE_DEFN")) Then  
    &bRet = &rcServDefn.Save();  
End-If;
```

Related Topics

- [Save method: RCServiceDefinition class](#)

Save method: RCServiceDefinition class

Syntax

Save()

Description

Use the Save method to save the related content service definition to the database. Invoke the Save method after instantiating a new service definition, after updating service definition properties, or after invoking any of these methods: AppendRCParam, CloneForNew, DeleteRCParam, or Rename.

Parameters

None.

Returns

A boolean value: True if the save is successful, False otherwise.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
Component PTCS_SRVDEFN:RCServiceDefinition &rcCloneServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");
```

```
&rcCloneServDefn = create  
PTCS_SRVDEFN:RCSERVICEDEFINITION("NEW_SERVICE_DEFN", "ENG");  
Local boolean &bRet = False;  
If ( True = &rcServDefn.CloneForNew(&rcCloneServDefn) ) Then  
    &bRet = &rcCloneServDefn.Save();  
End-If;
```

Related Topics

- [AppendRCPParam method: RCSERVICEDEFINITION class](#)
- [CloneForNew method: RCSERVICEDEFINITION class](#)
- [DeleteRCPParam method: RCSERVICEDEFINITION class](#)
- [Rename method: RCSERVICEDEFINITION class](#)

RCSERVICEDEFINITION Class Properties

In this section, the RCSERVICEDEFINITION class properties are presented in alphabetical order.

AppclassId property: RCSERVICEDEFINITION class

Description

When the related content service definition type is application class (ServiceUrlType = UAPC), use the AppclassId property to set or return a string value representing the name of the application class.

Note

The full path to the application class is constructed from three properties: PackageRoot, QualifyPath, and AppclassId.

This property is read/write.

Example

```
&rcServDefn.PackageRoot = "MY_PACKAGE";  
&rcServDefn.QualifyPath = ":";  
&rcServDefn.AppclassId = "My_Class";
```

Related Topics

- [PackageRoot property: RCSERVICEDEFINITION class](#)
- [QualifyPath property: RCSERVICEDEFINITION class](#)

Descr property: RCSERVICEDEFINITION class

Description

Use the Descr property to set or return a string value representing the description of the related content service definition.

This property is read/write.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
Local string &old_descr = &rcServDefn.Descr; /* Get */  
&rcServDefn.Descr = "New Service Definition"; /* Set */
```

EscapeParam property: RCServiceDefinition class

Description

Use the EscapeParam property to set or return a Y/N string value indicating whether to escape, or encode, the service URL parameters and values when the system forms the complete service URL.

Note

The default value is Y.

This property is read/write.

Example

```
&rcServDefn.EscapeParam = "N"; /* Set Y/N value */
```

FieldName property: RCServiceDefinition class

Description

When the related content service definition type is PeopleSoft script (ServiceUrlType = USCR), use the FieldName property to set or return a string value representing the name of the record field storing the iScript.

Note

The full path to the iScript function is constructed from four properties: PortalRecName, FieldName, PcEventType, and PcFunctionName.

This property is read/write.

Example

```
&rcServDefn.PortalRecName = "WEBLIB_MYREC";  
&rcServDefn.FieldName = "ISCRPT1";
```

```
&rcServDefn.PcEventType = "FieldFormula";  
&rcServDefn.PcFunctionName = "IScript_MyFunction";
```

Related Topics

- [PcEventType property: RCSERVICEDEFINITION class](#)
- [PcFunctionName property: RCSERVICEDEFINITION class](#)
- [PortalRecName property: RCSERVICEDEFINITION class](#)

IsBulkAction property: RCSERVICEDEFINITION class

Description

Use the IsBulkAction property to set or return a Y/N string value indicating whether the related content service definition is defined as a bulk action. Bulk actions are supported for three service types:

- Application class (UAPC).
- PeopleSoft component (UPGE).
- PeopleSoft script (USCR).

Note

The default value is N.

This property is read/write.

Example

```
&rcServDefn.IsBulkAction = "Y"; /* Set Y/N values */
```

IsNew property: RCSERVICEDEFINITION class

Description

Use the IsNew property to return whether the instantiation of this related content service definition is for a new definition. This property returns True only after the RCSERVICEDEFINITION constructor is invoked with the *service_ID* parameter set to a new and unique ID or when CloneForNew is invoked. All other times and after a Save is invoked, IsNew returns False.

This property is read-only.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCSERVICEDEFINITION &rcServDefn;  
  
&rcServDefn = create PTCS_SRVDEFN:RCSERVICEDEFINITION("NEW_SERVICE_DEFN",  
"ENG");  
If &rcServDefn.IsNew Then
```

```
/* Set properties of the new definition. */  
Else  
/* Examine properties of the existing definition. */  
End-If;
```

Related Topics

- [CloneForNew method: RCServicesDefinition class](#)
- [RCServicesDefinition method: RCServicesDefinition class](#)
- [Save method: RCServicesDefinition class](#)

LanguageCD property: RCServicesDefinition class

Description

Use the LanguageCD property to return the language code in use for this related content service definition as a three-character string.

This property is effectively read-only.

Example

```
Local string &langCD = &rcServDefn.LanguageCD;
```

Related Topics

- [RCServicesDefinition method: RCServicesDefinition class](#)

Market property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft component (ServiceUrlType = UPG), use the Market property to set or return a string value representing the market for this component definition.

Note

The full component name is constructed from four properties: PortalMenuName, PnlGrpName, Market and PnlName (optional).

This property is read/write.

Example

```
&rcServDefn.PortalMenuName = "PORTAL_MENU_1";  
&rcServDefn.Market = "GBL";  
&rcServDefn.PnlGrpName = "COMPONENT_TEST";  
&rcServDefn.PnlName = "MAIN_PAGE";
```

Related Topics

- [PnlGrpName property: RCSERVICEDEFINITION class](#)
- [PnlName property: RCSERVICEDEFINITION class](#)
- [PortalMenuName property: RCSERVICEDEFINITION class](#)

MsgNodeName property: RCSERVICEDEFINITION class

Description

Use the MsgNodeName property to set or return the name of the portal node as a string value.

Note

This property is used with all service types except for application class (ServiceUrlType = UAPC).

This property is read/write.

Example

```
&rcServDefn.MsgNodeName = "HRMS";
```

PackageRoot property: RCSERVICEDEFINITION class

Description

When the related content service definition type is application class (ServiceUrlType = UAPC), use the PackageRoot property to set or return a string value representing the name of the application package that contains the application class.

Note

The full path to the application class is constructed from three properties: PackageRoot, QualifyPath, and AppclassId.

This property is read/write.

Example

```
&rcServDefn.PackageRoot = "MY_PACKAGE";  
&rcServDefn.QualifyPath = ":";  
&rcServDefn.AppclassId = "My_Class";
```

Related Topics

- [AppclassId property: RCSERVICEDEFINITION class](#)
- [QualifyPath property: RCSERVICEDEFINITION class](#)

PcEventType property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft script (ServiceUrlType = USCR), use the PcEventType property to set or return a string value representing the name of the PeopleCode event storing the iScript. Typically, iScripts are stored in the FieldFormula event.

Note

The full path to the iScript function is constructed from four properties: PortalRecName, FieldName, PcEventType, and PcFunctionName.

This property is read/write.

Example

```
&rcServDefn.PortalRecName = "WEBLIB_MYREC";  
&rcServDefn.FieldName = "ISCRPT1";  
&rcServDefn.PcEventType = "FieldFormula";  
&rcServDefn.PcFunctionName = "IScript_MyFunction";
```

Related Topics

- [FieldName property: RCServicesDefinition class](#)
- [PcFunctionName property: RCServicesDefinition class](#)
- [PortalRecName property: RCServicesDefinition class](#)

PcFunctionName property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft script (ServiceUrlType = USCR), use the PcFunctionName property to set or return a string value representing the name of the function that is the iScript.

Note

The full path to the iScript function is constructed from four properties: PortalRecName, FieldName, PcEventType, and PcFunctionName.

This property is read/write.

Example

```
&rcServDefn.PortalRecName = "WEBLIB_MYREC";  
&rcServDefn.FieldName = "ISCRPT1";
```



```
&rcServDefn.PcEventType = "FieldFormula";  
&rcServDefn.PcFunctionName = "IScript_MyFunction";
```

Related Topics

- [FieldName property: RCServicesDefinition class](#)
- [PcEventType property: RCServicesDefinition class](#)
- [PortalRecName property: RCServicesDefinition class](#)

PnlGrpName property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft component (ServiceUrlType = UPG), use the PnlGrpName property to set or return a string value representing the component for this component definition.

Note

The full component name is constructed from four properties: PortalMenuName, PnlGrpName, Market and PnlName (optional).

This property is read/write.

Example

```
&rcServDefn.PortalMenuName = "PORTAL_MENU_1";  
&rcServDefn.Market = "GBL";  
&rcServDefn.PnlGrpName = "COMPONENT_TEST";  
&rcServDefn.PnlName = "MAIN_PAGE";
```

Related Topics

- [Market property: RCServicesDefinition class](#)
- [PnlName property: RCServicesDefinition class](#)
- [PortalMenuName property: RCServicesDefinition class](#)

PnlName property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft component (ServiceUrlType = UPG), use the PnlName property to set or return a string value representing the page name for this component definition. Use this optional property to open a specific page in the component.

Note

The full component name is constructed from four properties: PortalMenuName, PnlGrpName, Market and PnlName (optional).

This property is read/write.

Example

```
&rcServDefn.PortalMenuName = "PORTAL_MENU_1";  
&rcServDefn.Market = "GBL";  
&rcServDefn.PnlGrpName = "COMPONENT_TEST";  
&rcServDefn.PnlName = "MAIN_PAGE";
```

Related Topics

- [Market property: RCServicesDefinition class](#)
- [PnlGrpName property: RCServicesDefinition class](#)
- [PortalMenuName property: RCServicesDefinition class](#)

PortalMenuName property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft component (ServiceUrlType = UPGE), use the PortalMenuName property to set or return a string value representing the page name for this component definition. Use this optional property to open a specific page in the component.

Note

The full component name is constructed from four properties: PortalMenuName, PnlGrpName, Market and PnlName (optional).

This property is read/write.

Example

```
&rcServDefn.PortalMenuName = "PORTAL_MENU_1";  
&rcServDefn.Market = "GBL";  
&rcServDefn.PnlGrpName = "COMPONENT_TEST";  
&rcServDefn.PnlName = "MAIN_PAGE";
```

Related Topics

- [Market property: RCServicesDefinition class](#)
- [PnlGrpName property: RCServicesDefinition class](#)
- [PnlName property: RCServicesDefinition class](#)

PortalRecName property: RCServiceDefinition class

Description

When the related content service definition type is PeopleSoft script (ServiceUrlType = USCR), use the PortalRecName property to set or return a string value representing the name of the record storing the iScript.

Note

The full path to the iScript function is constructed from four properties: PortalRecName, FieldName, PcEventType, and PcFunctionName.

This property is read/write.

Example

```
&rcServDefn.PortalRecName = "WEBLIB_MYREC";  
&rcServDefn.FieldName = "ISCRPT1";  
&rcServDefn.PcEventType = "FieldFormula";  
&rcServDefn.PcFunctionName = "IScript_MyFunction";
```

Related Topics

- [FieldName property: RCServiceDefinition class](#)
- [PcEventType property: RCServiceDefinition class](#)
- [PcFunctionName property: RCServiceDefinition class](#)

PortalUrlAdm property: RCServiceDefinition class

Description

When the related content service definition type is non-PeopleSoft URL (ServiceUrlType = UEXT), use the PortalUrlAdm property to set or return a string value representing the full or partial URL external to the PeopleSoft application.

This property is read/write.

Example

The following example sets a full, external URL value:

```
&rcServDefn.PortalUrlAdm = "http://www.bing.com";
```

PortalUriText property: RCServiceDefinition class

Description

When the related content service definition type is generic PeopleSoft URL (ServiceUrlType = UGEN), use the PortalUriText property to set or return a string value representing the full or partial URL to the PeopleSoft definition.

This property is read/write.

Example

The following example sets a partial URL value. The complete URL is constructed by the system by appending this URL value to the URI text defined for the portal node specified by the MsgNodeName property.

```
&rcServDefn.PortalUriText = "c/PTCSSERVICES.PTCSSERVICES.GBL";
```

PostMapdata property: RCServiceDefinition class

Description

Use the PostMapdata property to set or return a Y/N string value indicating whether to have the mapping definition data, such as the parameter name and its mapping page field or key field name, and the parameter's actual mapped value posted with the service request.

Note

The default value is N.

This property is read/write.

Example

```
&rcServDefn.PostMapdata = "Y"; /* Set Y/N values */
```

PtppbPageletId property: RCServiceDefinition class

Description

When the related content service definition type is either embeddable pagelet (ServiceUrlType = PEP) or OBIEE pagelet (ServiceUrlType = POP), use the PtppbPageletId property to set or return a string value representing the pagelet ID.

This property is read/write.

Example

```
&rcServDefn.PtppbPageletId = "MY_PAGELET";
```

QualifyPath property: RCServicesDefinition class

Description

When the related content service definition type is application class (ServiceUrlType = UAPC), use the QualifyPath property to set or return a string value representing the names of each subpackage in the application class hierarchy that define the location of the application class. Separate subpackage names by a colon. If the class is defined in the top-level application package, use a colon only.

Note

The full path to the application class is constructed from three properties: PackageRoot, QualifyPath, and AppclassId.

This property is read/write.

Example

```
&rcServDefn.PackageRoot = "MY_PACKAGE";  
&rcServDefn.QualifyPath = ":";  
&rcServDefn.AppclassId = "My_Class";
```

Related Topics

- [AppclassId property: RCServicesDefinition class](#)
- [PackageRoot property: RCServicesDefinition class](#)

Queryname property: RCServicesDefinition class

Description

When the related content service definition type is PeopleSoft query (ServiceUrlType = UQRY), use the Queryname property to set or return a string value representing the query ID.

This property is read/write.

Example

```
&rcServDefn.Queryname = "USER_QRY";
```

SecUseEdit property: RCServicesDefinition class

Description

Use the SecUseEdit property to set or return an integer value indicating which security options are available when the service is assigned and configured for an application page.

Use the following integer values, which can be summed to indicate that more than one security option is available:

Value	Description
1	Public access, which provides access to the service based on the permissions of the public user
2	Related content provider security, which uses the security implemented by the content provider system.
4	Related content consumer security, which uses the security implemented by the consuming system—that is, the basic PeopleTools transaction security model (user-role-permission list).
16	App Class Required, which indicates that a service filter is required when this service is assigned to an application page. Important! Service filters are desupported and this option is retained for backward compatibility only. Do not select this option for new service definitions.

This property is read/write.

Example

In the following example, a value of 7 is the sum of the public (1), provider (2), and consumer (4) options:

```
&rcServDefn.SecUseEdit = 7; /* Allow multiple security options */
```

ServiceId property: RCServiceDefinition class

Description

Use the ServiceId property to return the unique identifier for the related content service definition.

This property is effectively read-only.

Example

In the following example, ServiceId returns SERVICE_DEFN, the value used to instantiate the service definition object:

```
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
Local string &serviceId = &rcServDefn.ServiceId;
```

Related Topics

- [RCServiceDefinition method: RCServiceDefinition class](#)

ServiceName property: RCServiceDefinition class

Description

Use the ServiceName property to set or return the service name for the related content service definition as a string value.

Note

This string is limited to 18 characters or less.

This property is read/write.

Example

```
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("SERVICE_DEFN", "ENG");  
&rcServDefn.ServiceName = "My RC Service";
```

Related Topics

- [InstanceLbl property: RCServiceConfig class](#)

ServiceType property: RCServiceDefinition class

Description

Use the ServiceType property to set or return a string value representing the service type of this related content service definition.

For explicit service definitions, use the value of S. For anonymous service definitions (that is, an ad hoc service definition based on an existing content reference definition), use the values of C, P, or G. See *Portal Technology: Explicit Definition Versus Anonymous Services* for more information.

Note

The default value is S.

This property can have the following values:

Value	Description
C	Component content reference (anonymous).
G	Tile content reference (anonymous).
P	Pagelet content reference (anonymous).
S	Service definition (explicit).

This property is read/write.

ServiceUrlType property: RCServiceDefinition class

Description

Use the ServiceUrlType property to set or return a string value specifying the URL type for this related content service definition:

Value	Description
PEP	Embeddable Pagelet
POP	OBIEE Pagelet
UAPC	Application Class
UEXT	Non-PeopleSoft URL
UGEN	Generic PeopleSoft URL
UPGE	PeopleSoft Component
UQRY	PeopleSoft Query
USCR	PeopleSoft Script
UTIL	PeopleSoft Tile

This property is read/write.

Example

```
&rcServDefn.ServiceUrlType = "UPGE";
```

SrvAttribute property: RCServicesDefinition class

Description

When the related content service definition type is application class (ServiceUrlType = UAPC), use the SrvAttribute property to set or return a string value indicating the type of application class service:

Value	Description
GNRL	Used for all application class services except simplified analytics. Note. This is the default value.
MSTR	Used to specify the simplified analytics master (template) definition.
CLON	Used to specify a clone of the simplified analytics master.

This property is read/write.

Example

```
&rcServDefn.SrvAttribute = "CLON";
```

Related Topics

- [SrvAttribute property: RCServicesConfig class](#)

SrvHelpText property: RCServicesDefinition class

Description

Use the SrvHelpText property to set or return a string value representing the HTML-formatted help text (as entered in the rich text editor) for this related content service definition.

This property is read/write.

Example

```
&rcServDefn.SrvHelpText = "<p>Some <em>help</em> text.<p>";
```

TileCategory property: RCServiceDefinition class

Description

When the related content service definition type is PeopleSoft tile (ServiceUrlType = UTIL), use the TileCategory property to set or return a string value indicating the content reference ID for the tile definition.

This property is read/write.

Example

```
&rcServDefn.TileCategory = "EP_BI_BILLINGNC_FL_GBL";
```

Useedit property: RCServiceDefinition class

Description

Use the Useedit property to set or return an integer value representing which display options are available when configuring classic related content for the bottom frame.

Use the following integer values, which can be summed to indicate that both display options available:

Value	Description
1	New window
2	Refresh

This property is read/write.

Example

```
&rcServDefn.Useedit = 3; /* Make both options available for configuration */
```

ValFromDt property: RCServiceDefinition class

Description

Use the ValFromDt property to set or return the start date when a related content or a related action service is available.

This property is read/write.

Example

```
import PTCS_SRVDEFN:RCSERVICEDefinition;

Local PTCS_SRVDEFN:RCSERVICEDefinition &rcServDefn = create
PTCS_SRVDEFN:RCSERVICEDefinition(&service_id, %Language);

Local date &ValFromDate = &rcServDefn.ValFromDate;
Local date &ValToDate = &rcServDefn.ValToDate;
```

ValToDate property: RCSERVICEDefinition class

Description

Use the ValToDate property to set or return the end date when a related content or a related action service is available.

This property is read/write.

Example

```
import PTCS_SRVDEFN:RCSERVICEDefinition;

Local PTCS_SRVDEFN:RCSERVICEDefinition &rcServDefn = create
PTCS_SRVDEFN:RCSERVICEDefinition(&service_id, %Language);

Local date &ValFromDate = &rcServDefn.ValFromDate;
Local date &ValToDate = &rcServDefn.ValToDate;
```

RCPParameter Class

Use the RCPParameter class to maintain the properties of service URL parameters for related content service definitions. Do not instantiate a PTCS_SRVDEFN:RCPParameter object directly. Instead, use the AppendRCPParam or GetRCPParameter methods of the PTCS_SRVDEFN:RCSERVICEDefinition class to instantiate and return a RCPParameter object.

Related Topics

- [AppendRCPParam method: RCSERVICEDefinition class](#)
- [GetRCPParameter method: RCSERVICEDefinition class](#)
- Portal Technology: Understanding Service URL Parameters

RCPParameter Class Properties

In this section, the RCPParameter class properties are presented in alphabetical order.

Descr property: RCPParameter class

Description

Use the Descr property to set or return a string value representing the description for this URL parameter.

This property is read/write.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServicesDefinition &rcServDefn;  
Component PTCS_SRVDEFN:RCParameter &orCDefnParam;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServicesDefinition("GOOGLE", "ENG");  
&orCDefnParam = &rcServDefn.AppendRCParam("q");  
&orCDefnParam.Descr = "Search terms";
```

ParameterName property: RCParameter class

Description

Use the ParameterName property to set or return a string value representing the parameter name for this URL parameter.

This property is read/write.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServicesDefinition &rcServDefn;  
Component PTCS_SRVDEFN:RCParameter &orCDefnParam;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServicesDefinition("GOOGLE", "ENG");  
&orCDefnParam = &rcServDefn.AppendRCParam("q");  
/* Change the parameter name */  
&orCDefnParam.ParameterName = "as_q";  
&orCDefnParam.Descr = "Advanced search terms";
```

RequiredFlg property: RCParameter class

Description

Use the RequiredFlg property to set or return a Y/N string value indicating whether this URL parameter is required. When a URL parameter is designated as required, a value must be mapped to the parameter when the service is configured.

Note

The default value is N.

This property is read/write.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
Component PTCS_SRVDEFN:RCParameter &orCDefnParam;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("GOOGLE", "ENG");  
&orCDefnParam = &rcServDefn.AppendRCParam("q");  
&orCDefnParam.Descr = "Search terms";  
&orCDefnParam.RequiredFlg = "Y"; /* Set Y/N value */  
&orCDefnParam.SeqNum = 1;
```

SeqNum property: RCParameter class

Description

Use the SeqNum property to set or return a number value specifying the sequence number for this URL parameter.

This property is read/write.

Example

```
import PTCS_SRVDEFN:*;  
  
Component PTCS_SRVDEFN:RCServiceDefinition &rcServDefn;  
Component PTCS_SRVDEFN:RCParameter &orCDefnParam;  
  
&rcServDefn = create PTCS_SRVDEFN:RCServiceDefinition("GOOGLE", "ENG");  
&orCDefnParam = &rcServDefn.AppendRCParam("q");  
&orCDefnParam.Descr = "Search terms";  
&orCDefnParam.RequiredFlg = "Y"; /* Set Y/N value */  
&orCDefnParam.SeqNum = 1;
```

RCService Class

Use the PTCS_SERVICE:RCService application class to manage all related content service configurations (PTCS_SRVCONFIG:RCServiceConfig) for a given component or pivot grid. Use the methods and properties of this class to create and delete service configurations and service instances.

Related Topics

- [Portal Technology: Managing Related Content Configurations and Data](#)
- [RCServiceConfig Class](#)
Use the PTCS_SRVCONFIG:RCServiceConfig application class to maintain the related content service configurations associated with a specific component. Use the methods and properties of this class to create, update, and delete service configurations.

RCService Class Methods

In this section, the RCService class methods are presented in alphabetical order.

AddNewService method: RCService class

Syntax

```
AddNewService(service_ID, instance_ID)
```

Description

Use the AddNewService method to instantiate and return a PTCS_SRVCONFIG:RCServiceConfig object. The object returned depends on the value of the *instance_ID* parameter:

- When the *instance_ID* parameter is 0, the PTCS_SRVCONFIG:RCServiceConfig object represents a new related content service configuration and a new instance ID is automatically generated.
- When the *instance_ID* parameter corresponds to an existing value, the PTCS_SRVCONFIG:RCServiceConfig object is instantiated from this existing configuration.
- When either the *service_ID* parameter or the *instance_ID* parameter is invalid and does not corresponds to an existing value, Null is returned.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID of an existing related content service definition.
<i>instance_ID</i>	Specifies an integer value representing the instance ID for a specific related content service configuration.

Returns

A PTCS_SRVCONFIG:RCServiceConfig object.

Example 1

The following example demonstrates how to instantiate an RCServiceConfig object for a new service configuration:

```
import PTCS_SERVICE:RCService;
import PTCS_SRVCONFIG:RCServiceConfig;

Component PTCS_SERVICE:RCService &pgRFFlRcService;

&pgRFFlRcService = create PTCS_SERVICE:RCService("EMPLOYEE", "QE_NUI_RI_GBL");
Local PTCS_SRVCONFIG:RCServiceConfig &rcRFFlServConfig =
```

```
&pgRFFlRcService.AddNewService("APPTTEST_UTIL_SERVID", 0);  
Local boolean &bRetSav = &pgRFFlRcService.Save();
```

Example 2

The following example demonstrates how to instantiate an RCServiceConfig object for an existing service configuration:

```
import PTCS_SERVICE:RCService;  
import PTCS_SRVCONFIG:RCServiceConfig;  
import PTCS_SRVCONFIG:RMapFields;  
  
Component PTCS_SERVICE:RCService &pgRFFlRcService;  
Component PTCS_SRVCONFIG:RMapFields &rcMapFields;  
  
&pgRFFlRcService = create PTCS_SERVICE:RCService("EMPLOYEE", "QE_NUI_RI_GBL");  
&pgRFFlRcService.LanguageCd = "ENG";  
Local PTCS_SRVCONFIG:RCServiceConfig &rcRFFlServConfig =  
&pgRFFlRcService.AddNewService("APPTTEST_UTIL_SERVID", 569863);  
&rcMapFields = &rcRFFlServConfig.GetMapField(1);  
If (&rcMapFields <> Null) Then  
    /* do some processing */  
End-If;
```

Related Topics

- [Save method: RCService class](#)
- [RCServiceConfig Class](#)
Use the PTCS_SRVCONFIG:RCServiceConfig application class to maintain the related content service configurations associated with a specific component. Use the methods and properties of this class to create, update, and delete service configurations.
- [IsNew property: RCServiceConfig class](#)
- [ServiceId property: RCServiceConfig class](#)
- [RCServiceDefinition Class](#)
Use the PTCS_SRVDEFN:RCServiceDefinition class to maintain related content service definitions. Use the methods and properties of this class to create, update, and delete service definitions.
- [ServiceId property: RCServiceDefinition class](#)

Delete method: RCService class

Syntax

```
Delete()
```

Description

Use the Delete method to delete all related content service configurations for this component.

Parameters

None.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCServices;  
  
Component PTCS_SERVICE:RCServices &pgRFFlRCServices;  
  
&pgRFFlRCServices = create PTCS_SERVICE:RCServices("EMPLOYEE", "QE_NUI_RI_GBL");  
Local boolean &bRetDel = &pgRFFlRCServices.Delete();
```

DeleteService method: RCServices class

Syntax

```
DeleteService(service_ID)
```

Description

Use the DeleteService method to delete all related content service instances from this component for the given *service_ID* parameter.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID of an existing related content service definition.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCServices;  
  
Component PTCS_SERVICE:RCServices &pgRFFlRCServices;  
  
&pgRFFlRCServices = create PTCS_SERVICE:RCServices("EMPLOYEE", "QE_NUI_RI_GBL");  
Local boolean &bRetDel =  
&pgRFFlRCServices.DeleteService("APPTTEST_UTIL_SERVID");  
Local boolean &bRetSav = &pgRFFlRCServices.Save();
```

Related Topics

- [DeleteServiceInstance method: RCServices class](#)
- [ServiceId property: RCServicesConfig class](#)

- [RCServiceDefinition Class](#)
Use the PTCS_SRVDEFN:RCServiceDefinition class to maintain related content service definitions. Use the methods and properties of this class to create, update, and delete service definitions.
- [ServiceId property: RCServiceDefinition class](#)

DeleteServiceInstance method: RCService class

Syntax

DeleteServiceInstance(*instance_ID*)

Description

Use the DeleteServiceInstance method to delete a specific service configuration instance from this component.

Parameters

Parameter	Description
<i>instance_ID</i>	Specifies an integer value representing the instance ID for a specific related content service configuration.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCService;
import PTCS_SRVCONFIG:RCServiceConfig;

Component PTCS_SERVICE:RCService &pgRFFlRcService;

&pgRFFlRcService = create PTCS_SERVICE:RCService("EMPLOYEE", "QE_NUI_RI_GBL");
Local PTCS_SRVCONFIG:RCServiceConfig &rcRFFlServConfig =
&pgRFFlRcService.AddNewService("APPTTEST_UTIL_SERVID", 0);
Local boolean &bRetDel =
&pgRFFlRcService.DeleteServiceInstance(&rcRFFlServConfig.InstanceId);
Local boolean &bRetSav = &pgRFFlRcService.Save();
```

Related Topics

- [DeleteService method: RCService class](#)
- [GetInstanceId method: RCService class](#)

GetInstanceId method: RCService class

Syntax

GetInstanceId(*service_ID*)

Description

Use the `GetInstanceId` method to return an array of integer representing the instance IDs associated with the specified *service_ID* parameter.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID of an existing related content service definition.

Returns

An array of integer.

Example

```
Local array of integer &instArr =  
&pgRFFlRcService.GetInstanceId("APPTTEST_UTIL_SERVID");  
If All(&instArr) Then  
    For &i = 1 To &instArr.Len  
        /* do something */  
    End-For;  
End-If;
```

Related Topics

- [ServiceId property: RCServiceConfig class](#)
- [RCServiceDefinition Class](#)
Use the PTCS_SRVDEFN:RCServiceDefinition class to maintain related content service definitions. Use the methods and properties of this class to create, update, and delete service definitions.
- [ServiceId property: RCServiceDefinition class](#)

GetServiceInfo method: RCService class

Syntax

```
GetServiceInfo(service_ID)
```

Description

Use the `GetServiceInfo` method to return all service configurations for the given *service_ID* parameter as an array of PTCS_SRVCONFIG:RCServiceConfig objects.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID of an existing related content service definition.

Returns

An array of PTCS_SRVCONFIG:RCServicesConfig objects.

Example

```
Local array of PTCS_SRVCONFIG:RCServicesConfig &rcServCfg =  
&pgRFFLRCServices.GetServiceInfo("APPTTEST_UTIL_SERVID");  
If All(&rcServCfg) Then  
    For &i = 1 To &rcServCfg.Len  
        /* do something */  
    End-For;  
End-If;
```

Related Topics

- [RCServicesConfig Class](#)
Use the PTCS_SRVCONFIG:RCServicesConfig application class to maintain the related content service configurations associated with a specific component. Use the methods and properties of this class to create, update, and delete service configurations.
- [ServiceId property: RCServicesConfig class](#)
- [RCServicesDefinition Class](#)
Use the PTCS_SRVDEFN:RCServicesDefinition class to maintain related content service definitions. Use the methods and properties of this class to create, update, and delete service definitions.
- [ServiceId property: RCServicesDefinition class](#)

RCServices method: RCServices class

Syntax

RCServices(*portal_name*, *CREF_name*)

Description

Use the RCServices constructor method to instantiate a PTCS_SERVICE:RCServices object to manage all related content service configurations for the specified component.

Parameters

Parameter	Description
<i>portal_name</i>	Specifies a string value representing the portal name.
<i>CREF_name</i>	Specifies a string value representing the component using its content reference ID (also referred to as its portal object name).

Returns

None.

Example

```
import PTCS_SERVICE:RCSERVICE;  
  
Component PTCS_SERVICE:RCSERVICE &pgRFFlRcService;  
  
&pgRFFlRcService = create PTCS_SERVICE:RCSERVICE("EMPLOYEE", "QE_NUI_RI_GBL");
```

Related Topics

- [IsNew property: RCSERVICE class](#)

Save method: RCSERVICE class

Syntax

```
Save()
```

Description

The Save method saves the related content service configurations for this component to the database. Invoke the Save method after instantiating a new component configuration, after updating configuration properties for the component, or after invoking any of these methods: AddNewService, DeleteService, or DeleteServiceInstance.

Parameters

None.

Returns

A boolean value: True if the save is successful, False otherwise.

Example

```
Local boolean &bRet = &pgRFFlRcService.Save();
```

Related Topics

- [AddNewService method: RCSERVICE class](#)
- [DeleteService method: RCSERVICE class](#)
- [DeleteServiceInstance method: RCSERVICE class](#)

RCSERVICE Class Properties

In this section, the RCSERVICE class properties are presented in alphabetical order.

ExpandFrame property: RCServices class

Description

Use the ExpandFrame to set or return a Y/N string value indicating whether the classic related content frame at the bottom of the page is expanded by default. In addition, one of the service configurations for this component must be selected as the default service.

Note

The default value is N.

This property is read/write.

Example

```
&pgRFFLRCServices.ExpandFrame = "Y";
```

Related Topics

- [IsDefault property: RCServicesConfig class](#)

IsNew property: RCServices class

Description

Use the IsNew property to return whether the instantiation of this service configuration is for a new definition. This property returns True only after the RCServices constructor is invoked with the combination of *portal_name* and *CREF_name* parameters set to a new combination. All other times and after a Save is invoked, IsNew returns False.

This property is read-only.

Related Topics

- [RCServices method: RCServices class](#)

MenuName property: RCServices class

Description

Use the MenuName property to set or return the menu name for this component as a string value.

Note

The value of MenuName must relate to the content reference ID (or portal object name) used to instantiate the object.

This property is read/write.

Example

```
import PTCS_SERVICE:RCServices;  
  
Component PTCS_SERVICE:RCServices &pgRFFLRCServices;  
  
&pgRFFLRCServices = create PTCS_SERVICE:RCServices("EMPLOYEE", "USERMAINT_GBL");  
&pgRFFLRCServices.MenuName = "MAINTAIN_SECURITY";
```

Related Topics

- [RCServices method: RCServices class](#)

MinPagelets property: RCServices class

Description

Use the MinPagelets property to set or return an integer value representing the maximum number pagelets that can appear minimized when the classic related content frame appears at the right of the page. If a user minimizes more than this number, the pagelets move to the More drop-down list at the bottom of the frame.

This property is read/write.

Example

```
&pgRFFLRCServices.MinPagelets = 2;
```

PnlGrpName property: RCServices class

Description

Use the PnlGrpName to set or return the component name for this component as a string value.

Note

The value of PnlGrpName is derived from the content reference ID (or portal object name) used to instantiate the object.

This property is read/write.

Example

In the following example, the value of PnlGrpName is USERMAINT:

```
import PTCS_SERVICE:RCServices;  
  
Component PTCS_SERVICE:RCServices &pgRFFLRCServices;
```

```
&pgRFFlRcService = create PTCS_SERVICE:RcService("EMPLOYEE", "USERMAINT_GBL");  
Local string &comp_name = &pgRFFlRcService.PnlGrpName;
```

Related Topics

- [RcService method: RcService class](#)

RCFrameLoc property: RcService class

Description

Use the RCFrameLoc property to set or return the location of the classic related content frame as one of the following string values:

Value	Description
B	Display related content in the bottom frame.
S	Display related content in the right frame.

This property is read/write.

Example

```
&pgRFFlRcService.RcFrameLoc = "B";
```

RCServicesConfig Class

Use the PTCS_SRVCONFIG:RCServicesConfig application class to maintain the related content service configurations associated with a specific component. Use the methods and properties of this class to create, update, and delete service configurations.

You can instantiate an object of this class three different ways:

- Invoking the AddNewService method of the PTCS_SERVICE:RcService class to return a PTCS_SRVCONFIG:RCServicesConfig object representing either a new or an existing configuration for that component.
- Invoking the GetServiceInfo method of the PTCS_SERVICE:RcService class to return an array of PTCS_SRVCONFIG:RCServicesConfig objects representing all service configurations for that component.
- Invoking the CloneForNewFull method to instantiate a new PTCS_SRVCONFIG:RCServicesConfig object by copying the current related content service configuration (the system generates a new instance ID).

Note

The RCServicesConfig class does not support managing related action configurations for MAP layouts.

Related Topics

- Portal Technology: Assigning Related Content to Classic Components and Pages

- Portal Technology: Assigning Related Content to Fluid Components and Pages
- Portal Technology: Assigning Related Actions to Classic Pages, Fluid Pages, and Pivot Grids
- Portal Technology: Mapping Application Class PeopleCode to Component Events
- [AddNewService method: RCService class](#)
- [GetServiceInfo method: RCService class](#)
- [CloneForNewFull method: RCServiceConfig class](#)

RCServiceConfig Class Methods

In this section, the RCServiceConfig class methods are presented in alphabetical order.

AddPageFieldMenu method: RCServiceConfig class

Syntax

```
AddPageFieldMenu(page_fld_ID, pg_rec_fld_ID)
```

Description

Use the AddPageFieldMenu method to instantiate and return a PTCS_MENULAYOUT:RCMenuLayout object. The object can represent an existing menu layout configuration or a new configuration depending on the parameters passed.

Parameters

Parameter	Description
<i>page_fld_ID</i>	Specifies a string value representing the page field's ID in the following format: <i>PAGE_NAME.field_ID</i> The field ID can be obtained from the Order tab of the page definition in Application Designer. For example: QE_BOOK.2

Parameter	Description
<i>pg_rec_fld_ID</i>	Specifies a string value representing the page record field's ID in the following format: <i>occurs_lvl.RECORD_NAME.FIELD_NAME.fie ld_ID</i> The occurs level, record name, field name, and field ID can be obtained from the Order tab of the page definition in Application Designer. For example: 0.QE_BOOK.QE_BOOK_NAME.2

Returns

A PTCS_MENULAYOUT:RCMenuLayout object.

Example

```
import PTCS_SERVICE:RCServices;
import PTCS_SRVCONFIG:RCServicesConfig;
import PTCS_SRVCONFIG:RMapFields;
import PTCS_MENULAYOUT:RCMenuLayout;

Component PTCS_SERVICE:RCServices &rcServices;
Component PTCS_SRVCONFIG:RCServicesConfig &rcServConfig;
Component PTCS_SRVCONFIG:RMapFields &rcMapFields;
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;

&rcServices = create PTCS_SERVICE:RCServices("EMPLOYEE", "QE_NUI_RI_GBL");
&rcServConfig = &rcServices.AddNewService("MY_SERVICE", 0);
&rcMapFields = &rcServConfig.AppendMapField("0.QE_BOOK.QE_BOOK_NAME.2");
/* Required value for the ParameterName property */
&rcMapFields.ParameterName = "PTCS_MENUFIELD";
&rcMapFields.PnlName = "QE_BOOK";
&rcMapFields.MapFieldType = "PF";
&rcMapFields.RefreshService = "N";
&rcMapFields.MapNullValue = "N";
&rcMapFields.FieldMenuOpt = "Y";
&bRet = &rcMapFields.Save();
&bRet = &rcServConfig.Save();
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",
"0.QE_BOOK.QE_BOOK_NAME.2");
If (&rcMenuLayout <> Null) Then
    /* do some processing */
    &bRet = &rcServConfig.Save();
End-If;
```

Related Topics

- [Save method: RCServicesConfig class](#)

- [RCMenuLayout Class](#)

Use the PTCS_MENULAYOUT:RCMenuLayout application class to manage the menu layout for related content, related action, and page field contextual menus.

AppendMapField method: RCServiceConfig class

Syntax

```
AppendMapField(pg_rec_fld_ID)
```

Description

Use the AppendMapField method to instantiate a PTCS_SRVCONFIG:RMapFields object. This method associates the page record field passed in as the *pg_rec_fld_ID* parameter to a map parameter.

Parameters

Parameter	Description
<i>pg_rec_fld_ID</i>	Specifies a string value representing the page record field's ID in the following format: <i>occurs_lvl.RECORD_NAME.FIELD_NAME.fie ld_ID</i> The occurs level, record name, field name, and field ID can be obtained from the Order tab of the page definition in Application Designer. For example: 0.QE_BOOK.QE_BOOK_NAME.2

Returns

A PTCS_SRVCONFIG:RMapFields object.

Example

```
import PTCS_SERVICE:RService;  
import PTCS_SRVCONFIG:RCServiceConfig;  
import PTCS_SRVCONFIG:RMapFields;  
  
Component PTCS_SERVICE:RService &rcService;  
Component PTCS_SRVCONFIG:RCServiceConfig &rcServConfig;  
Component PTCS_SRVCONFIG:RMapFields &rcMapFields;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMapFields = &rcServConfig.AppendMapField("0.QE_BOOK.QE_BOOK_NAME.2");  
Local boolean &bRet = &rcServConfig.Save();  
If (&rcMapFields <> Null) Then  
    /* do some processing */  
End-If;
```

Related Topics

- [Save method: RCServicesConfig class](#)
- [RCServicesFields Class](#)
Use the PTCS_SRVCONFIG:RCServicesFields application class to map related content service parameters to page fields, key fields, fixed values, or system variables.

CloneForNew method: RCServicesConfig class

Syntax

```
CloneForNew(&RCSrv_cnf)
```

Description

Use the CloneForNew method to create an identical copy of the related content service configuration executing this method to an already instantiated PTCS_SRVCONFIG:RCServicesConfig object but without copying the menu layout. Use this method when the menu layout need not be copied—for example, with the service configuration for pivot grids.

Parameters

Parameter	Description
<i>&RCSrv_cnf</i>	Specifies an already instantiated PTCS_SRVCONFIG:RCServicesConfig object that the configuration is copied to.

Returns

A boolean value: True if the copy is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCServices;  
import PTCS_SRVCONFIG:RCServicesConfig;  
  
Component PTCS_SERVICE:RCServices &rcService;  
Component PTCS_SRVCONFIG:RCServicesConfig &rcServConfig, &rcServConfigClone;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&bRet = &rcServConfig.CloneForNew(&rcServConfigClone);  
If (&rcServConfigClone <> Null) Then  
    /* do some processing */  
    &bRet = &rcServConfigClone.Save();  
End-If;
```

Related Topics

- [Save method: RCServicesConfig class](#)

CloneForNewFull method: RCServicesConfig class

Syntax

```
CloneForNewFull(service_lbl, service_ID, &dest_cmp, page_fld_ID,  
pg_rec_fld_ID, folder_lbl)
```

Description

Use the CloneForNewFull method to instantiate a new PTCS_SRVCONFIG:RCServicesConfig object by copying the current related content service configuration object executing the method. (The system generates a new instance ID.)

.

Parameters

Parameter	Description
<i>service_lbl</i>	Specifies the service label for the new service configuration as a string value.
<i>service_ID</i>	Specifies the service ID for the new service configuration as a string.
<i>&dest_cmp</i>	Specifies destination portal and component to copy the service configuration to as an already instantiated PTCS_SERVICE:RCServices object.
<i>page_fld_ID</i>	Specifies a string value representing the page field's ID in the following format: <i>PAGE_NAME.field_ID</i> The field ID can be obtained from the Order tab of the page definition in Application Designer. For example: QE_BOOK.2
<i>pg_rec_fld_ID</i>	Specifies a string value representing the page record field's ID in the following format: <i>occurs_lvl.RECORD_NAME.FIELD_NAME.field_ID</i> The occurs level, record name, field name, and field ID can be obtained from the Order tab of the page definition in Application Designer. For example: 0.QE_BOOK.QE_BOOK_NAME.2
<i>folder_lbl</i>	Specifies the menu folder label name as a string value.

Returns

A PTCS_SRVCONFIG:RCServiceConfig object.

Example

```
import PTCS_SERVICE:RCService;
import PTCS_SRVCONFIG:RCServiceConfig;
import PTCS_MENULAYOUT:RCMenuLayout;
import PTCS_MENULAYOUT:RCMenuFolder;
import PTCS_MENULAYOUT:RCMenuLink;

Component PTCS_SERVICE:RCService &rcService;
Component PTCS_SRVCONFIG:RCServiceConfig &rcServConfig, &rcServConfigClone;
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;
Component PTCS_MENULAYOUT:RCMenuFolder &rcMenuFolder;
Component PTCS_MENULAYOUT:RCMenuLink &rcMenuLink;

&rcService = create PTCS_SERVICE:RCService("EMPLOYEE", "PT_USERMAINT_GBL");
&rcService.MenuName = "MAINTAIN_SECURITY";
&rcService.PnlGrpName = "USERMAINT";
&rcService.ExpandFrame = "N";
&rcService.MinPagelets = 0;
&rcService.RcFrameLoc = "S";
&rcService.LanguageCd = "ENG";
&bRet = &rcService.Save();

&rcServConfig = &rcService.AddNewService("CLONE_RCPGLT", 0);
&rcServConfig.IsCompService = "C";
&rcServConfig.PnlName = "";
&rcServConfig.SeqNum = 0;
&rcServConfig.HideFromSearch = "N";
&rcServConfig.IsDefault = "N";
&rcServConfig.MapSecOptions = "P";
&rcServConfig.HandlerName = "";
&rcServConfig.InstanceLbl = "APPTTEST_PGLT_SIGNIN";
&rcServConfig.UrlTarget = "RCF";
&rcServConfig.MenuOpt = "Y";
&rcServConfig.MainMenuOpt = "N";
&rcServConfig.nSeqNumMmnu = 0;
&rcServConfig.nSeqNumRmnu = 0;
&rcServConfig.PackageRoot = "";
&rcServConfig.QualifyPath = "";
&rcServConfig.AppClassId = "";
&rcServConfig.cInitMin = "N";
&rcServConfig.cEnable = "Y";
&rcServConfig.SrvcOpenOpt = "";
&rcServConfig.IsEmbeddable = "";
&rcServConfig.IsSingleUOW = "";
&rcServConfig.MasterTemplate = "";
&rcServConfig.AllowPersonalization = "Y";
&rcServConfig.CompEvent = "";
&rcServConfig.ProcessSeq = "";
&bRet = &rcServConfig.Save();
```

```

&rcMenuLayout = &rcServConfig.AddPageFieldMenu("", "");
&rcMenuFolder = &rcMenuLayout.AddFolder("Root", Value(&rcServConfig.SeqNum));
&rcMenuLink = &rcMenuFolder.AppendMenuLink(&rcServConfig.ServiceId,
&rcServConfig.InstanceId);
&bRet = &rcMenuLayout.Save();

&rcServConfigClone = &rcServConfig.CloneForNewFull("APPTTEST_PGLT_SIGNCLN",
"APPTTEST_PGLT_SIGN", &rcService, "", "", "Root");
/* Modify only those properties that are different from the source config. */
&rcServConfigClone.InstanceLbl = "APPTTEST_PGLT_CLONE";
&rcServConfigClone.AllowPersonalization = "N";
&bRet = &rcServConfigClone.Save();

```

Related Topics

- [Save method: RCServConfig class](#)
- [IsNew property: RCServConfig class](#)

Delete method: RCServConfig class

Syntax

```
Delete()
```

Description

Use the Delete method to delete this related content service configuration.

Parameters

None.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```

import PTCS_SERVICE:RCServService;
import PTCS_SRVCONFIG:RCServConfig;

Component PTCS_SERVICE:RCServService &rcService;
Component PTCS_SRVCONFIG:RCServConfig &rcServConfig;

&rcService = create PTCS_SERVICE:RCServService("EMPLOYEE", "QE_BOOK");
&rcService.MenuName = "QE_NUI";
&rcService.PnlGrpName = "QE_BOOK";
&rcService.ExpandFrame = "N";
&rcService.MinPagelets = 0;
&rcService.RcFrameLoc = "S";
&rcService.LanguageCd = "ENG";
&bRet = &rcService.Save();

&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
If (&rcServConfig <> Null) Then

```

```

        &rcServConfig.IsCompService = "C";
        &rcServConfig.PnlName = "";
        &rcServConfig.SeqNum = 0;
        &rcServConfig.HideFromSearch = "N";
        &rcServConfig.IsDefault = "N";
        &rcServConfig.MapSecOptions = "P";
        &rcServConfig.HandlerName = "";
        &rcServConfig.InstanceLbl = "APPTTEST_TIL_SERVID";
        &rcServConfig.UrlTarget = "RCF";
        &rcServConfig.MenuOpt = "Y";
        &rcServConfig.MainMenuOpt = "N";
        &rcServConfig.nSeqNumMmnu = 0;
        &rcServConfig.nSeqNumRmnu = 0;
        &rcServConfig.PackageRoot = "";
        &rcServConfig.QualifyPath = "";
        &rcServConfig.AppClassId = "";
        &rcServConfig.cInitMin = "N";
        &rcServConfig.cEnable = "Y";
        &rcServConfig.SrvOpenOpt = "";
        &rcServConfig.IsEmbeddable = "";
        &rcServConfig.IsSingleUOW = "";
        &rcServConfig.MasterTemplate = "";
        &rcServConfig.AllowPersonalization = "Y";
        &rcServConfig.CompEvent = "";
        &rcServConfig.CompRecEvent = "";
        &rcServConfig.ProcessSeq = "";
        &rcServConfig.cEnable = "Y";
    End-If;
    &bRet = &rcServConfig.Save();

    If (&rcServConfig <> Null) Then
        &bRet = &rcServConfig.Delete();
    End-If;

```

DeleteMapField method: RCServiceConfig class

Syntax

```
DeleteMapField(n_index)
```

Description

Use the DeleteMapField method to delete the mapped page field from the related content service configuration.

Parameters

Parameter	Description
<i>n_index</i>	Specifies the mapped page field by index as a number value.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

In the following example, after execution of `DeleteMapField`, `&rcMapFields` is an invalid object:

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_SRVCONFIG:RCMAPFIELDS;  
import PTCS_MENULAYOUT:RCMENULAYOUT;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_SRVCONFIG:RCMAPFIELDS &rcMapFields;  
Component PTCS_MENULAYOUT:RCMENULAYOUT &rcMenuLayout;  
  
&rcService = create PTCS_SERVICE:RCSERVICE("EMPLOYEE", "QE_NUI_RI_GBL");  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMapFields = &rcServConfig.AppendMapField("0.QE_BOOK.QE_BOOK_NAME.2");  
/* Required value for the ParameterName property */  
&rcMapFields.ParameterName = "PTCS_MENUFIELD";  
&rcMapFields.PnlName = "QE_BOOK";  
&rcMapFields.MapFieldType = "PF";  
&rcMapFields.RefreshService = "N";  
&rcMapFields.MapNullValue = "N";  
&rcMapFields.FieldMenuOpt = "Y";  
Local boolean &bRet = &rcMapFields.Save();  
&bRet = &rcServConfig.Save();  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
  
&bRet = &rcServConfig.DeleteMapField(1);  
/* After execution of DeleteMapField, &rcMapFields is an invalid object. */  
If (&bRet) Then  
    /* do some processing */  
    &bRet = &rcServConfig.Save();  
End-If;
```

Related Topics

- [GetMapFieldCount method: RCSERVICECONFIG class](#)
- [Save method: RCSERVICECONFIG class](#)

GetMapField method: RCSERVICECONFIG class

Syntax

```
GetMapField(n_index)
```

Description

Use the `GetMapField` method to return the mapped page field of the related content service configuration as a newly instantiated `PTCS_SRVCONFIG:RCMapFields` object.

Parameters

Parameter	Description
<i>n_index</i>	Specifies the mapped page field by index as a number value.

Returns

A PTCS_SRVCONFIG:RcMapFields object.

Example

```
import PTCS_SERVICE:RcService;
import PTCS_SRVCONFIG:RcServiceConfig;
import PTCS_SRVCONFIG:RcMapFields;

Component PTCS_SERVICE:RcService &pgRFFlRcService;
Component PTCS_SRVCONFIG:RcMapFields &rcMapFields;

&pgRFFlRcService = create PTCS_SERVICE:RcService("EMPLOYEE", "QE_NUI_RI_GBL");
Local PTCS_SRVCONFIG:RcServiceConfig &rcRFFlServConfig =
&pgRFFlRcService.AddNewService("APPTTEST_UTIL_SERVID", 569863);
&rcMapFields = &rcRFFlServConfig.GetMapField(1);
If (&rcMapFields <> Null) Then
    /* do some processing */
End-If;
```

Related Topics

- [GetMapFieldCount method: RcServiceConfig class](#)

GetMapFieldCount method: RcServiceConfig class

Syntax

```
GetMapFieldCount()
```

Description

Use the GetMapFieldCount method to return the number of mapped page fields for this related content service configuration as a number value.

Parameters

None.

Returns

A number value.

Example

```
import PTCS_SERVICE:RcService;
import PTCS_SRVCONFIG:RcServiceConfig;
```



```

import PTCS_SRVCONFIG:RMapFields;
import PTCS_MENULAYOUT:RMenuLayout;

Component PTCS_SERVICE:RService &rcService;
Component PTCS_SRVCONFIG:RServiceConfig &rcServConfig;
Component PTCS_SRVCONFIG:RMapFields &rcMapFields;
Component PTCS_MENULAYOUT:RMenuLayout &rcMenuLayout;

&rcService = create PTCS_SERVICE:RService("EMPLOYEE", "QE_NUI_RI_GBL");
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
&rcMapFields = &rcServConfig.AppendMapField("0.QE_BOOK.QE_BOOK_NAME.2");
/* Required value for the ParameterName property */
&rcMapFields.ParameterName = "PTCS_MENUFIELD";
&rcMapFields.PnlName = "QE_BOOK";
&rcMapFields.MapFieldType = "PF";
&rcMapFields.RefreshService = "N";
&rcMapFields.MapNullValue = "N";
&rcMapFields.FieldMenuOpt = "Y";
Local boolean &bRet = &rcMapFields.Save();
&bRet = &rcServConfig.Save();
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",
"0.QE_BOOK.QE_BOOK_NAME.2");

Local number &rcMapFldCnt = &rcServConfig.GetMapFieldCount();
If (&rcMapFldCnt > 0) Then
    /* do some processing */
End-If;

```

Save method: RCServConfig class

Syntax

Save()

Description

Use the Save method to save changes to this related content service configuration into the database. Invoke the Save method after updating properties for the service configuration or after invoking any of these methods: AddPageFieldMenu, AppendMapField, CloneForNew, CloneForNewFull, or DeleteMapField.

Parameters

None.

Returns

A boolean value: True if the save is successful, False otherwise.

Example

```

import PTCS_SERVICE:RService;
import PTCS_SRVCONFIG:RServiceConfig;

Component PTCS_SERVICE:RService &rcService;

```

```
Component PTCS_SRVCONFIG:RCServConfig &rcServConfig;

&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
&rcServConfig.IsCompService = "P";
&rcServConfig.PnlName = "USER_ROLES";
&rcServConfig.SeqNum = 0;
&rcServConfig.IsDefault = "N";
&rcServConfig.MapSecOptions = "P";
&rcServConfig.InstanceLbl = "My Service";
&rcServConfig.MenuOpt = "N";
&rcServConfig.MainMenuOpt = "N";
&rcServConfig.cInitMin = "N";
&rcServConfig.cEnable = "Y";
&rcServConfig.IsEmbeddable = "";
&rcServConfig.IsSingleUOW = "";
&rcServConfig.MasterTemplate = "";
&rcServConfig.AllowPersonalization = "Y";
Local boolean &bRet = &rcServConfig.Save();
```

Related Topics

- [AddPageFieldMenu method: RCServConfig class](#)
- [AppendMapField method: RCServConfig class](#)
- [CloneForNew method: RCServConfig class](#)
- [CloneForNewFull method: RCServConfig class](#)
- [DeleteMapField method: RCServConfig class](#)

RCServConfig Class Properties

In this section, the RCServConfig class properties are presented in alphabetical order.

AllowPersonalization property: RCServConfig class

Description

Use the AllowPersonalization property to set or return a Y/N string value to indicate whether user personalization is allowed for this item of fluid related content. "Personalization" allows the user to show or hide an item of fluid related content.

Note

The default value is Y.

This property is read/write.

Example

```
&rcServConfig.AllowPersonalization = "N"; /* Set Y/N string value */
```

cEnable property: RCServiceConfig class

Description

Use the cEnable property to set or return a Y/N string value to indicate whether this related content service configuration is enabled.

Note

The default value is Y.

This property is read/write.

Example

```
&rcServConfig.cEnable = "N"; /* Set Y/N string value */
```

cInitMin property: RCServiceConfig class

Description

Use the cInitMin property to set or return a Y/N string value to indicate whether this service appears in the closed state when the user initially accesses the Related Content frame at the right of the page.

Note

The default value is N.

This property is read/write.

Example

```
&rcServConfig.cInitMin = "Y"; /* Set Y/N string value */
```

CompEvent property: RCServiceConfig class

Description

Use the CompEvent property to set or return a string value representing the component level event for which application class PeopleCode is mapped.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See Portal Technology: Mapping Application Class PeopleCode to Component Events for more information.

Following values can be assigned to this property:

Value	Description
POST	Component PostBuild event.
PRE	Component PreBuild event.
SPOS	Component SavePostChange event.
SPRE	Component SavePreChange event.
WFLO	Component WorkFlow event.

Example

```
&rcServConfig.CompEvent = "SPRE";
```

Related Topics

- [CompRecEvent property: RCServConfig class](#)

CompRecEvent property: RCServConfig class

Description

Use the CompRecEvent property to set or return a string value representing the component record level event for which application class PeopleCode is mapped.

Note

The Activate event is actually at the page level, and not the component record level.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See Portal Technology: Mapping Application Class PeopleCode to Component Events for more information.

Following values can be assigned to this property:

Value	Description
RDEL	Component record RowDelete event.
RINI	Component record RowInit event.
RINS	Component record RowInsert event.
RSEL	Component record RowSelect event.
SEDIT	Component record SaveEdit event.
SPOS	Component record SavePostChange event.
SPRE	Component Record SavePreChange event.
PACT	Page Activate event.
RFCH	Component record FieldChange Event.

This property is read/write.

Example

```
&rcServConfig.CompRecEvent = "RINI";
```

Related Topics

- [CompEvent property: RCServConfig class](#)
- [EventRecName property: RCServConfig class](#)
- [FieldName property: RCServConfig class](#)

EventRecName property: RCServConfig class

Description

Use the EventRecName property to set or return a string value representing the component record for which application class PeopleCode is mapped.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See Portal Technology: Mapping Application Class PeopleCode to Component Events for more information.

This property is read/write.

Example

```
&rcServConfig.EventRecName = "QE_RCF_EM_REC";  
&rcServConfig.CompRecEvent = "RINI";
```

Related Topics

- [CompRecEvent property: RCServConfig class](#)
- [FieldName property: RCServConfig class](#)

FieldName property: RCServConfig class

Description

Use the FieldName property to set or return a string value representing the component record for which application class PeopleCode is mapped.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See Portal Technology: Mapping Application Class PeopleCode to Component Events for more information.

This property is read/write.

Example

```
&rcServConfig.EventRecName = "QE_RCF_EM_REC";  
&rcServConfig.FieldName = "QEPC_LEVEL0_KEY";  
&rcServConfig.CompRecEvent = "RINI";
```

Related Topics

- [CompRecEvent property: RCServiceConfig class](#)
- [EventRecName property: RCServiceConfig class](#)

InstanceId property: RCServiceConfig class

Description

Use the InstanceId property to return the instance ID for the related content service configuration as a number value.

This property is effectively read-only.

Related Topics

- [AddNewService method: RCService class](#)

InstanceLbl property: RCServiceConfig class

Description

Use the InstanceLbl property to set or return the label of the related content service configuration as a string value.

This property is read/write.

Example

```
&rcServConfig.InstanceLbl= "My Service Instance";
```

Related Topics

- [ServiceName property: RCServiceDefinition class](#)

IsCompService property: RCServiceConfig class

Description

Use the IsCompService property to set or return a one-character string value indicating whether the service is configured at the component level or at the page level.

Following values can be assigned to this property:

Value	Description
P	Page level service.
C	Component level service.

This property is read/write.

Example

```
&rcServConfig.IsCompService = "C";
```

IsDefault property: RCServiceConfig class

Description

Use the IsDefault property to set or return a Y/N string value to indicate whether this related content service configuration is the default service when classic related content is configured for the bottom frame. A default service must be selected only when the classic related content frame at the bottom of the page is configured to initially display expanded.

Note

The default value is N.

This property is read/write.

Example

```
&rcSrvC.ExpandFrame = "Y";  
&rcServConfig.IsDefault= "Y";
```

Related Topics

- [ExpandFrame property: RCService class](#)

IsEmbeddable property: RCServiceConfig class

Description

Use the IsEmbeddable property to set or return a Y/N string value to indicate whether this fluid related content service configuration is embeddable related content.

Note

The default value is N.

This property is read/write.

Example

```
&rcServConfig.IsEmbeddable = "Y";
```

IsNew property: RCServiceConfig class

Description

Use the IsNew property to return whether the instantiation of this service configuration is for a new related content service configuration. This property returns True only in the following circumstances:

- After invoking the `AddNewService` method of the `PTCS_SERVICE:RCServConfig` class with the `instance_ID` parameter set to 0 to return a `PTCS_SRVCONFIG:RCServConfig` object representing a new configuration for that component.
- After invoking the `CloneForNewFull` method to return a `PTCS_SRVCONFIG:RCServConfig` object (with a system-generated new instance ID).

For all other instantiated objects and after a `Save` is invoked, `IsNew` returns `False`.

This property is read-only.

Example

```
Local boolean &isNew = &rcServConfig.IsNew;
```

Related Topics

- [CloneForNewFull method: RCServConfig class](#)
- [AddNewService method: RCServConfig class](#)

LanguageCD property: RCServConfig class

Description

Use the `LanguageCD` property to set or return the language code for this related content service configuration as a three-character string.

This property is read/write.

Example

```
&rcServConfig.LanguageCD = "FRA";
```

MainMenuOpt property: RCServConfig class

Description

Use the `MainMenuOpt` property to set or return a Y/N string value. Set this property to Y for two scenarios only:

- For a related action configured at the component level that is to be displayed in search results.
- For component level event mapping'

In all other cases, set this property to N.

Note

The default value is N.

This property is read/write.

Example

```
&rcServConfig.MainMenuOpt = "Y";
```

MenuOpt property: RCServConfig class

Description

Use the MenuOpt property to set or return a Y/N string value. Set this property to Y only when configuring classic component-level related content in the right frame.

Note

The default value is N.

This property is read/write.

Example

```
&rcService.RcFrameLoc = "S";  
&rcServConfig.IsCompService = "C";  
&rcServConfig.MenuOpt = "Y";
```

Related Topics

- [IsCompService property: RCServConfig class](#)
- [RcFrameLoc property: RCServConfig class](#)

PnlName property: RCServConfig class

Description

Use the PnlName property to set or return the page name for which the service is configured only when IsCompService is set to P.

This property is read/write.

Example

```
&rcServConfig.IsCompService = "P";  
&rcServConfig.PnlName= "USER_GENERAL";
```

Related Topics

- [IsCompService property: RCServConfig class](#)

PortalName property: RCServiceConfig class

Description

Use the PortalName property to return the name of the portal for this related content configuration as a string value.

This property is effectively read-only.

Example

```
Local string &sPortalName = &rcServConfig.PortalName;
```

Related Topics

- [RCService method: RCService class](#)

PortalObjName property: RCServiceConfig class

Description

Use the PortalObjName property to return the name of the component for this related content configuration as a string value.

This property is effectively read-only.

Example

```
Local string &sPortalObjName = &rcServConfig.PortalObjName;
```

Related Topics

- [RCService method: RCService class](#)

ProcessSeq property: RCServiceConfig class

Description

Use the ProcessSeq property to set or return a string value representing whether this application class PeopleCode is executed before or after any PeopleCode program defined for the same event from the component definition.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See *Portal Technology: Mapping Application Class PeopleCode to Component Events* for more information.

Following values can be assigned to this property:

Value	Description
PRE	The custom application class PeopleCode will be executed before any PeopleCode program defined for the same event from the component definition.
POST	The custom application class PeopleCode will be executed after any PeopleCode program defined for the same event from the component definition.

This property is read/write.

Example

```
&rcServConfig.ProcessSeq = "PRE";
```

SeqNum property: RCServConfig class

Description

Use the SeqNum property to set or return an integer value representing the sequence number for this application class PeopleCode only when more than one custom application class program is mapped to the same event.

Note

The PeopleSoft Related Content Framework can also be used to map application class PeopleCode programs to component level, page level, and component record level events. This allows custom PeopleCode programs to be defined for a component without customizing the component definition in Application Designer. These custom PeopleCode programs can be configured to run before or after any PeopleCode program defined for the same event from the component definition. See Portal Technology: Mapping Application Class PeopleCode to Component Events for more information.

This property is read/write.

Example

```
&rcServConfig.SeqNum= 3;
```

Serviceld property: RCServConfig class

Description

Use the Serviceld property to return the ID for the related content service definition as a string value.

This property is effectively read-only.

Example

```
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
Local string &serviceId = &rcServConfig.ServiceId;
```

Related Topics

- [AddNewService method: RCServConfig class](#)

SrvcAttribute property: RCServConfig class

Description

Use the SrvcAttribute property to set or return the service type as a string value:

Value	Description
GNRL	Used for service configurations except for the simplified analytics master (template) definition. Note. This is the default value.
MSTR	Used to specify the simplified analytics master (template) definition.
CLON	Used to specify a clone of the simplified analytics master.

This property is read/write.

Example

```
&rcServConfig.SrvcAttribute= "GNRL";
```

Related Topics

- [SrvcAttribute property: RCServConfig class](#)

UrlTarget property: RCServConfig class

Description

Use the UrlTarget property to set or return service target as a string value:

Value	Description
RCF	For all classic and fluid related content, this is the default value. Open the content in the related content frame.
MDLW	For classic and fluid related actions, open the related action in a modal window.
NWIN	For classic and fluid related actions, open the related action in a new window.
TGTF	For classic and fluid related actions, open the related action in the target content area replacing the current page. Note: For all related actions except those based on an application class service definition, this is the default value.

Value	Description
TOPF	For classic and fluid related actions, open the related action by replacing the entire browser window.
USRD	For classic and fluid related actions based on an application class service definition, open the related action in the manner specified in the application class code.

This property is read/write.

Example

```
&rcServConfig.UrlTarget= "MDLW";
```

RMapFields Class

Use the PTCS_SRVCONFIG:RMapFields application class to map related content service parameters to page fields, key fields, fixed values, or system variables.

Do not instantiate an object of this class directly. Instead, use either the AppendMapField or GetMapField methods of the PTCS_SRVCONFIG:RServiceConfig class.

Related Topics

- Portal Technology: Configuring Service Parameters, Filters, and Security
- [AppendMapField method: RServiceConfig class](#)
- [GetMapField method: RServiceConfig class](#)
- [RCPParameter Class](#)
Use the RCPParameter class to maintain the properties of service URL parameters for related content service definitions. Do not instantiate a PTCS_SRVDEFN:RCPParameter object directly. Instead, use the AppendRCPParam or GetRCPParameter methods of the PTCS_SRVDEFN:RServiceDefinition class to instantiate and return a RCPParameter object.

RMapFields Class Methods

In this section, the RMapFields class methods are presented in alphabetical order.

CopyFrom method: RMapFields class

Syntax

```
CopyFrom(&SrcMapField)
```

Description

Use the CopyFrom method to copy the attributes of the specified PTCS_SRVCONFIG:RMapFields object into the object invoking this method.

Parameters

Parameter	Description
<i>&SrcMapField</i>	Specifies the source to copy from as an already instantiated PTCS_SRVCONFIG:RMapFields object.

Returns

A boolean value: True if the copy is successful, False otherwise.

Example

```
import PTCS_SERVICE:RService;
import PTCS_SRVCONFIG:RServiceConfig;
import PTCS_SRVCONFIG:RMapFields;

Component PTCS_SERVICE:RService &rcService;

Local PTCS_SRVCONFIG:RServiceConfig &rcServConfigSrc =
&rcService.AddNewService("APPTTEST_UTIL_SERVID", 0);
Local PTCS_SRVCONFIG:RMapFields &rclMapFldsSrc =
&rcServConfigSrc.AppendMapField("0.OPRID_VW2.OPRID.2");

Local PTCS_SRVCONFIG:RServiceConfig &rcServConfigDst =
&rcService.AddNewService("APPTTEST_UTIL_SERVID", 0);
Local PTCS_SRVCONFIG:RMapFields &rclMapFldsDst =
&rcServConfigDst.AppendMapField("0.OPRID_VW4.CUSTID.4");
Local boolean &bRetx = &rclMapFldsDst.CopyFrom(&rclMapFldsSrc);
Local boolean &bRets = &rclMapFldsDst.Save();
```

Related Topics

- [Save method: RMapFields class](#)

Save method: RMapFields class

Syntax

Save()

Description

Use the Save method to save the PTCS_SRVCONFIG:RMapFields object to the database. Invoke the Save method after updating properties for the mapping configuration or after invoking the CopyFrom method.

Parameters

None.

Returns

A boolean value: True if the save is successful, False otherwise.

Example

```
import PTCS_SERVICE:RService;  
import PTCS_SRVCONFIG:RServiceConfig;  
import PTCS_SRVCONFIG:RMapFields;  
  
Component PTCS_SERVICE:RService &rcService;  
Component PTCS_SRVCONFIG:RServiceConfig &rcServConfig;  
Component PTCS_SRVCONFIG:RMapFields &rcMapFields;  
  
&rcServConfig = &rcService.AddNewService("APPTTEST_UTIL_SERVID", 0);  
Local PTCS_SRVCONFIG:RMapFields &rcMapFlds =  
&rcServConfig.AppendMapField("0.OPRID_VW2.OPRID.2");  
Local boolean &bRet = &rcServConfig.Save();  
&rcMapFlds.ParameterName = "PTCS_MENUFIELD";  
&rcMapFlds.PnlName = "QE_RI_GROUPLET";  
Local boolean &bRet2 = &rcMapFlds.Save();
```

Related Topics

- [CopyFrom method: RMapFields class](#)

RMapFields Class Properties

In this section, the RMapFields class properties are presented in alphabetical order.

FieldMenuOpt property: RMapFields class

Description

Use the FieldMenuOpt property to set or return a Y/N string value indicating whether the menu is associated with a page field.

Set this property to Y for related content with a mapping type of page field when you want to display the related content in the page field menu. Also set this property to Y when mapping related actions to a page field menu. When this parameter is set to Y, you must set the MapFieldType to PF. In addition, you must also set the ParameterName property to PTCS_MENUFIELD, a required value.

Note

The PnlFieldName property is also required, and is set by the invocation of the AppendMapField method.

Note

The default value is N.

This property is read/write.

Example

```
&rcMapFields = &rcServConfig.AppendMapField("0.QE_BOOK.QE_BOOK_NAME.2");  
/* Required value for the ParameterName property */  
&rcMapFields.ParameterName = "PTCS_MENUFIELD";  
&rcMapFields.PnlName = "QE_BOOK";  
&rcMapFields.MapFieldType = "PF";  
&rcMapFields.FieldMenuOpt = "Y";
```

Related Topics

- [MapFieldType property: RcMapFields class](#)
- [ParameterName property: RcMapFields class](#)
- [PnlFieldName property: RcMapFields class](#)
- [AppendMapField method: RcServiceConfig class](#)

MapFieldType property: RcMapFields class

Description

Use the MapFieldType property to set or return a string value representing the mapping type:

Value	Description
KF	Key field.
FV	Fixed value.
SV	System variable.
PF	Page field (valid only for a page-level configuration—that is, when the IsCompService property of the parent RcServiceConfig object is set to P).
DC	Data column (valid only for a pivot grid configuration).
ML	Menu location (valid only for chart field in a pivot grid configuration).

This property is read/write.

Example

```
&rcMapFlds.MapFieldType = "PF";
```

MapNullValue property: RcMapFields class

Description

Use the MapNullValue property to set or return a Y/N string value indicating whether a parameter value is required.

Note

The default value is N.

This property is read/write.

Example

```
&rcMapFlds.MapNullValue = "Y";
```

ParameterName property: RMapFields class

Description

Use the ParameterName property to return a string value representing the name of the service parameter from the related content service definition.

! Important

Only when the FieldMenuOpt property is set to Y, set the ParameterName property to PTCS_MENUFIELD, a required value.

This property is typically read-only.

Related Topics

- [FieldMenuOpt property: RMapFields class](#)

PnlFieldName property: RMapFields class

Description

Use the PnlFieldName property to set or return the mapped data value as a string value. The value specified—for example, the mapped page field name, key field name, fixed value, system variable, and so on—depends on the value of the MapFieldType property.

This property is read/write.

Example 1

```
Local PTCS_SRVCONFIG:RMapFields &rcMapFlds =  
&rcServConfig.AppendMapField("0.OPRID_VW2.OPRID.2");  
&rcMapFields.MapFieldType = "PF";  
Local string &sPnlFieldName = &rcMapFlds.PnlFieldName;
```

Example 2

```
Local PTCS_SRVCONFIG:RMapFields &rcMapFlds =  
&rcServConfig.AppendMapField("0.OPRID_VW2.OPRID.2");  
&rcMapFields.MapFieldType = "SV";  
&rcMapFlds.PnlFieldName = "%UserId";
```

Related Topics

- [MapFieldType property: RMapFields class](#)
- [PnlName property: RMapFields class](#)

PnlName property: RCMFields class

Description

Use the PnlName property to set or return the page name as a string value. This property is required only when the value of the MapFieldType property is set to PF (page field); otherwise, it is an empty string.

This property is read/write.

Example

```
Local PTCS_SRVCONFIG:RCMapFields &rcMapFlds =  
&rcServConfig.AppendMapField("0.OPRID_VW2.OPRID.2");  
&rcMapFlds.PnlName = "QE_RI_GROUPLET";  
&rcMapFlds.MapFieldType = "PF";  
Local boolean &bRet = &rcMapFlds.Save();
```

Related Topics

- [MapFieldType property: RCMFields class](#)
- [PnlFieldName property: RCMFields class](#)

RefreshService property: RCMFields class

Description

Use the RefreshService property to set or return a Y/N string value that indicates whether to have the service data refreshed automatically when the key values on the transaction page changes.

Note

The default value is N.

This property is read/write.

Example

```
&rcMapFlds.RefreshService = "Y";
```

RCMenuLayout Class

Use the PTCS_MENULAYOUT:RCMenuLayout application class to manage the menu layout for related content, related action, and page field contextual menus.

Do not instantiate an object of this class directly. Instead, use the AddPageFieldMenu method of the PTCS_SRVCONFIG:RCServiceConfig class to instantiate a menu layout object representing an existing menu layout configuration or a new configuration depending on the parameters passed. Use the CloneForNewFull method of this class to instantiate a menu layout object by copying the menu layout from an existing related content service configuration.

Related Topics

- Portal Technology: Configuring Related Content Menus
- [AddPageFieldMenu method: RCTServiceConfig class](#)
- [CloneForNewFull method: RCMenuLayout class](#)
- [RCMenuFolder Class](#)
Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.
- [RCMenuLink Class](#)
Use the PTCS_MENULAYOUT:RCMenuLink application class to manage menu links for related content, related action, and page field contextual menus.

RCMenuLayout Class Methods

In this section, the RCMenuLayout class methods are presented in alphabetical order.

AddFolder method: RCMenuLayout class

Syntax

```
AddFolder(folder_lbl, folder_seqnum)
```

Description

Use the AddFolder method to instantiate a PTCS_MENULAYOUT:RCMenuFolder object to add a new menu folder to the menu layout.

Note

Folders cannot be created for the related content menu.

Parameters

Parameter	Description
<i>folder_lbl</i>	Specifies the label for the folder as a string value.
<i>folder_seqnum</i>	Specifies the sequence number for the folder as an integer value.

Returns

A PTCS_MENULAYOUT:RCMenuFolder object.

Example

```
import PTCS_SERVICE:RCTService;  
import PTCS_SRVCONFIG:RCTServiceConfig;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuFolder;
```

```
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local PTCS_MENULAYOUT:RCMenuFolder &lclMenuFolder =  
&rcMenuLayout.AddFolder("CRM", 2);  
Local boolean &bRet = &rcMenuLayout.Save();
```

Related Topics

- [Save method: RCMenuLayout class](#)
- [RCMenuFolder Class](#)
Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.

CloneForNew method: RCMenuLayout class

Syntax

```
CloneForNew(&RCmenu_layout)
```

Description

Use the CloneForNew method to create an identical copy of the menu layout executing this method to an already instantiated PTCS_MENULAYOUT:RCMenuLayout object—for example, a standalone RCMenuLayout object, one associated with this RCSERVICECONFIG object, or one associated with a different RCSERVICECONFIG object.

Parameters

Parameter	Description
<i>&RCmenu_layout</i>	Specifies an already instantiated PTCS_MENULAYOUT:RCMenuLayout object that the configuration is copied to.

Returns

A boolean value: True if the copy is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuFolder;  
import PTCS_MENULAYOUT:RCMenuLink;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout, &rcMenuLayoutNew;
```

```

Component PTCS_MENUAYOUT:RCMenuFolder &rcMenuFolder;
Component PTCS_MENUAYOUT:RCMenuLink &rcMenuLink;

&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
&rcServConfig.IsCompService = "C";
&rcServConfig.PnlName = "";
&rcServConfig.SeqNum = 0;
&rcServConfig.HideFromSearch = "N";
&rcServConfig.IsDefault = "N";
&rcServConfig.MapSecOptions = "P";
&rcServConfig.HandlerName = "";
&rcServConfig.InstanceLbl = "CLONERCPGLT";
&rcServConfig.UrlTarget = "RCF";
&rcServConfig.MenuOpt = "Y";
&rcServConfig.MainMenuOpt = "N";
&rcServConfig.nSeqNumMmnu = 0;
&rcServConfig.nSeqNumRmnu = 0;
&rcServConfig.PackageRoot = "";
&rcServConfig.QualifyPath = "";
&rcServConfig.AppClassId = "";
&rcServConfig.cInitMin = "N";
&rcServConfig.cEnable = "Y";
&rcServConfig.SrvcOpenOpt = "";
&rcServConfig.IsEmbeddable = "";
&rcServConfig.IsSingleUOW = "";
&rcServConfig.MasterTemplate = "";
&rcServConfig.AllowPersonalization = "Y";
&rcServConfig.CompEvent = "";
&rcServConfig.ProcessSeq = "";
Local boolean &bRet1 = &rcServConfig.Save();

&rcMenuLayout = &rcServConfig.AddPageFieldMenu("", "");
&rcMenuFolder = &rcMenuLayout.AddFolder("Root", Value(&rcServConfig.SeqNum));
&rcMenuLink = &rcMenuFolder.AppendMenuLink(&rcServConfig.ServiceId,
&rcServConfig.InstanceId);
Local boolean &bRet2 = &rcMenuLayout.Save();

Local boolean &bRet3 = &rcMenuLayout.CloneForNew(&rcMenuLayoutNew);
If (&bRet3) Then
    /* do some processing */
    Local boolean &bRet4 = &rcMenuLayoutNew.Save();
End-If;

```

Related Topics

- [Save method: RCMenuLayout class](#)

CloneForNewFull method: RCMenuLayout class

Syntax

```
CloneForNewFull(&rcServiceConfig, page_fld_ID, pg_rec_fld_ID)
```

Description

Use the CloneForNewFull method to instantiate a new PTCS_MENULAYOUT:RCMenuLayout object associated with the specified service configuration object. The menu layout of the object executing this method is copied to the new object.

Parameters

Parameter	Description
<i>&rcServiceConfig</i>	Specifies an already instantiated PTCS_SRVCONFIG:RCServiceConfig object that this new menu layout will be associated with.
<i>page_fld_ID</i>	Specifies a string value representing the page field's ID in the following format: <i>PAGE_NAME.field_ID</i> The field ID can be obtained from the Order tab of the page definition in Application Designer. For example: QE_BOOK.2
<i>pg_rec_fld_ID</i>	Specifies a string value representing the page record field's ID in the following format: <i>occurs_lvl.RECORD_NAME.FIELD_NAME.field_ID</i> The occurs level, record name, field name, and field ID can be obtained from the Order tab of the page definition in Application Designer. For example: 0.QE_BOOK.QE_BOOK_NAME.2

Returns

A PTCS_MENULAYOUT:RCMenuLayout object.

Example

```
import PTCS_SERVICE:RCService;  
import PTCS_SRVCONFIG:RCServiceConfig;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuFolder;  
import PTCS_MENULAYOUT:RCMenuLink;  
  
Component PTCS_SERVICE:RCService &rcService;  
Component PTCS_SRVCONFIG:RCServiceConfig &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout, &rcMenuLayoutNew;  
Component PTCS_MENULAYOUT:RCMenuFolder &rcMenuFolder;
```

```

Component PTCS_MENULAYOUT:RCMenuLink &rcMenuLink;

&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
&rcServConfig.IsCompService = "C";
&rcServConfig.PnlName = "";
&rcServConfig.SeqNum = 0;
&rcServConfig.HideFromSearch = "N";
&rcServConfig.IsDefault = "N";
&rcServConfig.MapSecOptions = "P";
&rcServConfig.HandlerName = "";
&rcServConfig.InstanceLbl = "CLONERCPGLT";
&rcServConfig.UrlTarget = "RCF";
&rcServConfig.MenuOpt = "Y";
&rcServConfig.MainMenuOpt = "N";
&rcServConfig.nSeqNumMmnu = 0;
&rcServConfig.nSeqNumRmnu = 0;
&rcServConfig.PackageRoot = "";
&rcServConfig.QualifyPath = "";
&rcServConfig.AppClassId = "";
&rcServConfig.cInitMin = "N";
&rcServConfig.cEnable = "Y";
&rcServConfig.SrvOpenOpt = "";
&rcServConfig.IsEmbeddable = "";
&rcServConfig.IsSingleUOW = "";
&rcServConfig.MasterTemplate = "";
&rcServConfig.AllowPersonalization = "Y";
&rcServConfig.CompEvent = "";
&rcServConfig.ProcessSeq = "";
Local boolean &bRet1 = &rcServConfig.Save();

&rcMenuLayout = &rcServConfig.AddPageFieldMenu("", "");
&rcMenuFolder = &rcMenuLayout.AddFolder("Root", Value(&rcServConfig.SeqNum));
&rcMenuLink = &rcMenuFolder.AppendMenuLink(&rcServConfig.ServiceId,
&rcServConfig.InstanceId);
Local boolean &bRet2 = &rcMenuLayout.Save();

&rcMenuLayoutNew = &rcMenuLayout.CloneForNewFull(&rcServConfig, "QE_BOOK.2",
"0.QE_BOOK.QE_BOOK_NAME.2");
If (&rcMenuLayoutNew <> Null) Then
    /* do some processing */
End-If;

```

Delete method: RCMenuLayout class

Syntax

Delete()

Description

Use the Delete method to delete the menu layout.

Parameters

None.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMENULAYOUT;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMENULAYOUT &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local boolean &bRet = &rcMenuLayout.Delete();  
If (&bRet) Then  
    /* do some processing */  
End-If;
```

DeleteFolder method: RCMenULayout class

Syntax

DeleteFolder(*nItem*)

Description

Use the DeleteFolder method to delete the specified menu folder from this menu layout.

Parameters

Parameter	Description
<i>nItem</i>	Specifies the menu folder as a number value.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMENULAYOUT;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMENULAYOUT &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",
```

```
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local boolean &bRet = &rcMenuLayout.DeleteFolder(2);  
Local boolean &bRet = &rcMenuLayout.Save();
```

Related Topics

- [Save method: RCMenuLayout class](#)
- [RCMenuFolder Class](#)
Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.

DeleteMenuLink method: RCMenuLayout class

Syntax

```
DeleteMenuLink(service_ID, instance_ID)
```

Description

Use the DeleteMenuLink method to delete the specified menu link from the layout.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID for the parent related content service configuration.
<i>instance_ID</i>	Specifies an integer value representing the instance ID for the parent related content service configuration.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCSservice;  
import PTCS_SRVCONFIG:RCSserviceConfig;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuLink;  
  
Component PTCS_SERVICE:RCSservice &rcService;  
Component PTCS_SRVCONFIG:RCSserviceConfig &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;  
Component PTCS_MENULAYOUT:RCMenuLink &rcMenuLink;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
If (&rcMenuLayout <> Null) Then  
    &bRet = &rcMenuLayout.DeleteMenuLink("MY_SERVICE",  
&rcServConfig.InstanceId);  
    If (&bRet) Then
```

```
        /* do some processing */  
        Local boolean &bRet2 = &rcMenuLayout.Save();  
    End-If;  
End-If;
```

GetFolder method: RCMenuLayout class

Syntax

GetFolder(*nItem*)

Description

Use the GetFolder method to instantiate a PTCS_MENULAYOUT:RCMenuFolder object for the specified menu folder.

Note

Folders cannot be created for the related content menu.

Parameters

Parameter	Description
<i>nItem</i>	Specifies the menu folder as a number value.

Returns

A PTCS_MENULAYOUT:RCMenuFolder object.

Example

```
import PTCS_SERVICE:RCSservice;  
import PTCS_SRVCONFIG:RCSserviceConfig;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuFolder;  
  
Component PTCS_SERVICE:RCSservice &rcService;  
Component PTCS_SRVCONFIG:RCSserviceConfig &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local PTCS_MENULAYOUT:RCMenuFolder &lclMenuFolder =  
&rcMenuLayout.GetFolder(1);
```

Related Topics

- [RCMenuFolder Class](#)
Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.

GetFolderCount method: RCMenuLayout class

Syntax

```
GetFolderCount()
```

Description

Use the GetFolderCount method to return the count of menu folders for this menu layout as a number value.

Parameters

None.

Returns

A number value.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMENULAYOUT;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMENULAYOUT &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local number &n, &fld_cnt;  
&fld_cnt = &rcMenuLayout.GetFolderCount();  
For &n = 1 To &fld_cnt  
    /* Do some processing */  
End-For;
```

GetFolderFromFolderId method: RCMenuLayout class

Syntax

```
GetFolderFromFolderId(folder_lbl)
```

Description

Use the GetFolderFromFolderId method to return a PTCS_MENULAYOUT:RCMenuFolder object representing the menu folder for the specified *folder label*.

Parameters

Parameter	Description
<i>folder_lbl</i>	Specifies the <i>label</i> for the folder as a string value.

Returns

A PTCS_MENULAYOUT:RCMenuFolder object.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMenuLayout;  
import PTCS_MENULAYOUT:RCMenuFolder;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
Local PTCS_MENULAYOUT:RCMenuFolder &lclMenuFolder =  
&rcMenuLayout.GetFolderFromFolderId("CRM");
```

Related Topics

- [FolderLbl property: RCMenuFolder class](#)
- [RCMenuFolder Class](#)
Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.

Save method: RCMenuLayout class

Syntax

```
Save()
```

Description

Use the Save method to save the menu layout to the database. Invoke the Save method after updating any configuration properties for the menu layout or after invoking any of the following methods: AddFolder, CloneForNew, DeleteFolder, or DeleteMenuLink

Parameters

None.

Returns

A boolean value: True if the save is successful, False otherwise.

Example

```
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("", "");  
&rcMenuFolder = &rcMenuLayout.AddFolder("Root", Value(&rcServConfig.SeqNum));  
&rcMenuLink = &rcMenuFolder.AppendMenuLink(&rcServConfig.ServiceId,  
&rcServConfig.InstanceId);  
Local boolean &bRet = &rcMenuLayout.Save();
```

Related Topics

- [AddFolder method: RCMenuLayout class](#)
- [CloneForNew method: RCMenuLayout class](#)
- [DeleteFolder method: RCMenuLayout class](#)
- [DeleteMenuLink method: RCMenuLayout class](#)

RCMenuLayout Class Properties

In this section, the RCMenuLayout class properties are presented in alphabetical order.

IsNew property: RCMenuLayout class

Description

Use the IsNew property to return a boolean value indicating whether the menu layout is a new configuration. This property returns True after calling CloneForNew to update the target menu layout object.

Note

This property returns False after instantiating a new menu layout object with either AddPageFieldMenu or CloneForNewFull.

This property is read-only.

Related Topics

- [CloneForNew method: RCMenuLayout class](#)

LanguageCD property: RCMenuLayout class

Description

Use the LanguageCD property to set or return the language code for this menu layout as a three-character string.

This property is read/write.

Example

```
&rcMenuLayout.LanguageCD = "GER";
```

MenuId property: RCMenuLayout class

Description

Use the MenuId property to return the ID for this menu layout as a string value in the following format:

PAGE_NAME.field_ID

This property is set by the CloneForNewFull method and the AddPageFieldMenu method of the RCTServiceConfig class.

This property is effectively read-only.

Example

```
Local string &menu_ID = &rcMenuLayout.MenuId;
```

Related Topics

- [CloneForNewFull method: RCMenuLayout class](#)
- [AddPageFieldMenu method: RCTServiceConfig class](#)

MenuType property: RCMenuLayout class

Description

Use the MenuType property to return the type of menu as a string value:

Value	Description
FLDM	Page field level related action and related content configuration.
MMNU	Component level related action configuration.
PGBM	Pivot grid related action configuration.
RCMU	Component level related content menu configuration.

This property is set by the AddPageFieldMenu method of the RCTServiceConfig class.

This property is effectively read-only.

Example

```
Local String &sMenu_Type = &rcMenuLayout.MenuType;
```

Related Topics

- [AddPageFieldMenu method: RCTServiceConfig class](#)

PnlFldName property: RCMenuLayout class

Description

Use the PnlFldName property to return the mapped data value as a string value. The value specified—for example, the page field name, key field name, fixed value, system variable, and so on—depends on the value of the MapFieldType property of the RCMAPFields class.

This property is read/write.

Related Topics

- [MapFieldType property: RCMAPFields class](#)
- [PnlFieldName property: RCMAPFields class](#)

PnlName property: RCMenuLayout class

Description

Use the PnlName property to return the page name as a string value. This property is set in the RCMAPFields object and is only required when the value of the MapFieldType property is set to PF (page field); otherwise, it is an empty string.

This property is effectively read-only.

Example

```
Local String &pg_name = &rcMenuLayout.PnlName;
```

Related Topics

- [AddPageFieldMenu method: RCSERVICEConfig class](#)
- [PnlName property: RCMAPFields class](#)

PortalName property: RCMenuLayout class

Description

Use the PortalName property to return the portal specified for this menu layout as a string value.

This property is set by the AddPageFieldMenu method of the RCSERVICEConfig class.

This property is effectively read-only.

Example

```
Local string &portal_name = &rcMenuLayout.PortalName;
```

Related Topics

- [AddPageFieldMenu method: RCSERVICEConfig class](#)

PortalObjName property: RCMenuLayout class

Description

Use the PortalObjName property to return the content reference ID (portal object name) specified for this menu layout as a string value.

This property is set by the AddPageFieldMenu method of the RCTServiceConfig class.

This property is effectively read-only.

Example

```
Local string &CREF_ID = &rcMenuLayout.PortalObjName;
```

Related Topics

- [AddPageFieldMenu method: RCTServiceConfig class](#)

RCMenuFolder Class

Use the PTCS_MENULAYOUT:RCMenuFolder application class to manage folders for related action and page field contextual menus.

Note

Folders cannot be created for the related content menu.

Do not instantiate an object of this class directly. Instead, use the AddFolder or GetFolder methods of the PTCS_MENULAYOUT:RCMenuLayout class to instantiate a menu folder object.

Related Topics

- Portal Technology: Configuring Related Content Menus
- [AddFolder method: RCMenuLayout class](#)
- [GetFolder method: RCMenuLayout class](#)
- [RCMenuLink Class](#)
Use the PTCS_MENULAYOUT:RCMenuLink application class to manage menu links for related content, related action, and page field contextual menus.

RCMenuFolder Class Methods

In this section, the RCMenuFolder class methods are presented in alphabetical order.

AppendMenuLink method: RCMenuFolder class

Syntax

```
AppendMenuLink(service_ID, instance_ID)
```

Description

Use the AppendMenuLink method to instantiate a PTCS_MENULAYOUT:RCMenuLink object and append that link as the last link in the menu folder.

Parameters

Parameter	Description
<i>service_ID</i>	Specifies a string value representing the service ID for the parent related content service configuration.
<i>instance_ID</i>	Specifies an integer value representing the instance ID for the parent related content service configuration.

Returns

A PTCS_MENULAYOUT:RCMenuLink object.

Example

```
import PTCS_SRVDEFN:RCServicesDefinition;
import PTCS_SERVICE:RCServices;
import PTCS_SRVCONFIG:RCServicesConfig;
import PTCS_MENULAYOUT:RCMenuLayout;
import PTCS_MENULAYOUT:RCMenuFolder;
import PTCS_MENULAYOUT:RCMenuLink;

Component PTCS_SERVICE:RCServices &rcService;
Component PTCS_SRVCONFIG:RCServicesConfig &rcServConfig;
Component PTCS_MENULAYOUT:RCMenuLayout &rcMenuLayout;
Component PTCS_MENULAYOUT:RCMenuFolder &rcMenuFolder;
Component PTCS_MENULAYOUT:RCMenuLink &rcMenuLink;

&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",
"0.QE_BOOK.QE_BOOK_NAME.2");
&rcMenuFolder = &rcMenuLayout.GetFolder(1);
If (&rcMenuFolder <> Null) Then
    For &n = 1 To &rcMenuFolder.GetMenuLinkCount()
        &rcMenuLink = &rcMenuFolder.AppendMenuLink("MY_SERVICE",
&rcServConfig.InstanceId);
        If (&rcMenuLink <> Null) Then
            /* Do some processing */
        End-If;
    End-For;
End-If;
```

Related Topics

- [RCMenuItem Class](#)

Use the PTCS_MENULAYOUT: RCMMenuItem application class to manage menu links for related content, related action, and page field contextual menus.

DeleteMenuItem method: RCMMenuItem class

Syntax

DeleteMenuItem(*nItem*)

Description

Use the DeleteMenuItem method to delete the specified link from the menu folder.

Parameters

Parameter	Description
<i>nItem</i>	Specifies the index of the link as a number value.

Returns

A boolean value: True if the delete is successful, False otherwise.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMenuItemLayout;  
import PTCS_MENULAYOUT:RCMenuItemFolder;  
import PTCS_MENULAYOUT:RCMenuItemLink;  
  
Component PTCS_SERVICE:RCSERVICE &rcSERVICE;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcSERVCONFIG;  
Component PTCS_MENULAYOUT:RCMenuItemLayout &rcMenuItemLayout;  
Component PTCS_MENULAYOUT:RCMenuItemFolder &rcMenuItemFolder;  
Component PTCS_MENULAYOUT:RCMenuItemLink &rcMenuItemLink;  
Local number &n;  
  
&rcSERVCONFIG = &rcSERVICE.AddNewService("MY_SERVICE", 0);  
&rcMenuItemLayout = &rcSERVCONFIG.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
&rcMenuItemFolder = &rcMenuItemLayout.GetFolder(1);  
If (&rcMenuItemFolder <> Null) Then  
  For &n = 1 To &rcMenuItemFolder.GetMenuItemLinkCount()  
    Local boolean &bRet = &rcMenuItemFolder.DeleteMenuItem(&n);  
    If (&bRet) Then  
      /* Do some processing */  
    End-If;  
  End-For;  
End-If;
```

Related Topics

- [RCMenuItem Class](#)

Use the PTCS_MENULAYOUT:RCMenuItem application class to manage menu links for related content, related action, and page field contextual menus.

GetMenuItem method: RCMenuFolder class

Syntax

GetMenuItem(*nItem*)

Description

Use the GetMenuItem method to instantiate a PTCS_MENULAYOUT:RCMenuItem object representing the specified link.

Parameters

Parameter	Description
<i>nItem</i>	Specifies the index of the link as a number value.

Returns

A PTCS_MENULAYOUT:RCMenuItem object.

Example

```
import PTCS_SERVICE:RCServices;  
import PTCS_SRVCONFIG:RCServicesConfig;  
import PTCS_MENULAYOUT:RCMenuItemLayout;  
import PTCS_MENULAYOUT:RCMenuItemFolder;  
import PTCS_MENULAYOUT:RCMenuItemLink;  
  
Component PTCS_SERVICE:RCServices &rcServices;  
Component PTCS_SRVCONFIG:RCServicesConfig &rcServConfig;  
Component PTCS_MENULAYOUT:RCMenuItemLayout &rcMenuItemLayout;  
Component PTCS_MENULAYOUT:RCMenuItemFolder &rcMenuItemFolder;  
Component PTCS_MENULAYOUT:RCMenuItemLink &rcMenuItemLink;  
Local number &n;  
  
&rcServConfig = &rcServices.AddNewService("MY_SERVICE", 0);  
&rcMenuItemLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
&rcMenuItemFolder = &rcMenuItemLayout.GetFolder(1);  
If (&rcMenuItemFolder <> Null) Then  
    For &n = 1 To &rcMenuItemFolder.GetMenuItemLinkCount()  
        &rcMenuItemLink = &rcMenuItemFolder.GetMenuItemLink(&n);  
        If (&rcMenuItemLink <> Null) Then  
            /* Do some processing */  
        End-If;  
    End-For;  
End-If;
```

Related Topics

- [RCMenuLink Class](#)

Use the PTCS_MENULAYOUT: RCMenulink application class to manage menu links for related content, related action, and page field contextual menus.

GetMenuLinkCount method: RCMenulink class

Syntax

```
GetMenuLinkCount()
```

Description

Use GetMenuLinkCount method to return the count of menu links in this folder as a number value.

Parameters

None.

Returns

A number value.

Example

```
import PTCS_SERVICE:RCSERVICE;  
import PTCS_SRVCONFIG:RCSERVICECONFIG;  
import PTCS_MENULAYOUT:RCMENULAYOUT;  
import PTCS_MENULAYOUT:RCMENULINK;  
import PTCS_MENULAYOUT:RCMENULINK;  
  
Component PTCS_SERVICE:RCSERVICE &rcService;  
Component PTCS_SRVCONFIG:RCSERVICECONFIG &rcServConfig;  
Component PTCS_MENULAYOUT:RCMENULAYOUT &rcMenuLayout;  
Component PTCS_MENULAYOUT:RCMENULINK &rcMenuLink;  
Local number &n;  
  
&rcServConfig = &rcService.AddNewService("MY_SERVICE", 0);  
&rcMenuLayout = &rcServConfig.AddPageFieldMenu("QE_BOOK.2",  
"0.QE_BOOK.QE_BOOK_NAME.2");  
&rcMenuFolder = &rcMenuLayout.GetFolder(1);  
If (&rcMenuFolder <> Null) Then  
  For &n = 1 To &rcMenuFolder.GetMenuLinkCount()  
    /* Do some processing */  
  End-For;  
End-If;
```

RCMenuFolder Class Properties

In this section, the RCMenulink class properties are presented in alphabetical order.

FolderId property: RCMenuFolder class

Description

Use the FolderId property to return the ID for this menu folder as a string value. This property is generated by the AddFolder method of the RCMenuLayout class.

This property is effectively read-only.

Related Topics

- [AddFolder method: RCMenuLayout class](#)

FolderLbl property: RCMenuFolder class

Description

Use the FolderLbl property to set or return the label for this menu folder as a string value. This property is set by the *folder_lbl* parameter passed to the AddFolder method of the RCMenuLayout class, and is passed as the identifier to the GetFolderFromFolderId method.

This property is read/write.

Related Topics

- [AddFolder method: RCMenuLayout class](#)
- [GetFolderFromFolderId method: RCMenuLayout class](#)

FolderSeqNum property: RCMenuFolder class

Description

Use the FolderSeqNum property to set or return the sequence number for this menu folder as a number value. This property is set by the *folder_seqnum* parameter passed to the AddFolder method of the RCMenuLayout class.

This property is read/write.

Related Topics

- [AddFolder method: RCMenuLayout class](#)

PrntFolderId property: RCMenuFolder class

Description

Use the PrntFolderId property to set or return the ID of the parent menu folders as a string value. This property is set by the AddFolder method of the RCMenuLayout class.

This property is read/write.

Related Topics

- [AddFolder method: RCMenuLayout class](#)

RCMenuLink Class

Use the PTCS_MENULAYOUT:RCMenuLink application class to manage menu links for related content, related action, and page field contextual menus.

Do not instantiate an object of this class directly. Instead, use the AppendMenuLink or GetMenuLink methods of the PTCS_MENULAYOUT:RCMenuFolder class to instantiate a menu link object.

Related Topics

- Portal Technology: Configuring Related Content Menus
- [AppendMenuLink method: RCMenuFolder class](#)
- [GetMenuLink method: RCMenuFolder class](#)

RCMenuLink Class Properties

In this section, the RCMenuLink class properties are presented in alphabetical order.

InstanceId property: RCMenuLink class

Description

Use the InstanceId property to return the instance ID for the parent related content service configuration as a number value.

This property is effectively read-only.

SeqNum property: RCMenuLink class

Description

Use the SeqNum property to set or return the sequence number for this link within its menu folder as a number value.

This property is read/write.

Example

```
&rcMenuLink.SeqNum = 0; / Make this the first link. /
```

ServiceId property: RCMenuLink class

Description

Use the ServiceId property to return the service ID for the parent related content service configuration as a string value.

This property is effectively read-only.

Related Topics

- [ServiceId property: RCServiceConfig class](#)

Additional PeopleCode Examples

This section provides additional code examples for the Related Content Framework: Creating Service Definitions and Service Configurations.

Creating Service Definitions and Service Configurations

The following PeopleCode program:

- Creates a service definition (APPTTEST_UGEN_SERVID).
- Creates a configuration for a component (PCODEAPI_MAINCOMP_GBL).
- Adds a related action to the component (REL_CONTENT Comp).
- Maps the related action to a page field (O.RELCONT_PCODE.RELATED_ACT.4).
- Configures the menu layout for the same page field.

```
import PTCS_SRVDEFN:*;
import PTCS_SERVICE:*;
import PTCS_SRVCONFIG:*;
import PTCS_MENULAYOUT:*;

Component PTCS_SRVDEFN:RCSERVICEDefinition &rcUgenServDefn;
Component PTCS_SERVICE:RCSERVICE &pgRFFlRcService;
Component PTCS_SRVCONFIG:RCSERVICEConfig &rcRFFlServConfig,
&rcRAFlServConfigUGEN;

/* RCSERVICEDefinition creation */
&rcUgenServDefn = create
PTCS_SRVDEFN:RCSERVICEDefinition("APPTTEST_UGEN_SERVID", "ENG");
&rcUgenServDefn.ServiceName = "REL_CONTENT Comp";
&rcUgenServDefn.Descr = "RELATED_CONTENT comp as a generic Peoplesoft URL" |
&sFieldName;
&rcUgenServDefn.ServiceUrlType = "UGEN";
&rcUgenServDefn.MsgNodeName = "QEDMO";
&rcUgenServDefn.PortalUrlAdm = "c/
QE_RELATED_CONTENT_FRAMEWORK.RELATED_CONTENT.GBL";
&rcUgenServDefn.SecUseEdit = 1;
Local boolean &bRet = &rcUgenServDefn.Save();

/* RCSERVICE creation */
&pgRFFlRcService = create PTCS_SERVICE:RCSERVICE("EMPLOYEE",
"PCODEAPI_MAINCOMP_GBL");
&pgRFFlRcService.MenuName = "QE_RELATED_CONTENT_FRAMEWORK";
&pgRFFlRcService.PnlGrpName = "PCODEAPI_MAINCOMP";
&pgRFFlRcService.SetLanguage("ENG");
&bRet = &pgRFFlRcService.Save();
/* Related actions */

/* RCSERVICEConfig create */
&rcRAFlServConfigUGEN = &pgRFFlRcService.AddNewService("APPTTEST_UGEN_SERVID",
0);
&rcRAFlServConfigUGEN.IsCompService = "P";
&rcRAFlServConfigUGEN.PnlName = "PCODEAPI_MAINCOMP";
```



```

&rcRAFLServConfigUGEN.SeqNum = 0;
&rcRAFLServConfigUGEN.HideFromSearch = "N";
&rcRAFLServConfigUGEN.IsDefault = "N";
&rcRAFLServConfigUGEN.MapSecOptions = "P";
&rcRAFLServConfigUGEN.HandlerName = "";
&rcRAFLServConfigUGEN.InstanceLbl = "REL_CONTENT Comp";
&rcRAFLServConfigUGEN.UrlTarget = "NWIN";
&rcRAFLServConfigUGEN.MenuOpt = "N";
&rcRAFLServConfigUGEN.MainMenuOpt = "N";
&rcRAFLServConfigUGEN.nSeqNumMmnu = 0;
&rcRAFLServConfigUGEN.nSeqNumRmnu = 0;
&rcRAFLServConfigUGEN.PackageRoot = "";
&rcRAFLServConfigUGEN.QualifyPath = "";
&rcRAFLServConfigUGEN.AppClassId = "";
&rcRAFLServConfigUGEN.cInitMin = "N";
&rcRAFLServConfigUGEN.cEnable = "Y";
&rcRAFLServConfigUGEN.SrvcOpenOpt = "";
&rcRAFLServConfigUGEN.IsEmbeddable = "";
&rcRAFLServConfigUGEN.IsSingleUOW = "";
&rcRAFLServConfigUGEN.MasterTemplate = "";
&rcRAFLServConfigUGEN.AllowPersonalization = "Y";
&rcRAFLServConfigUGEN.CompEvent = "";
&rcRAFLServConfigUGEN.ProcessSeq = "";
&rcRAFLServConfigUGEN.cEnable = "Y";
&rcRAFLServConfigUGEN.AllowPersonalization = "Y";
&bRet = &rcRAFLServConfigUGEN.Save();

/* RMapFields create */
Local PTCS_SRVCONFIG:RMapFields &rcRAFLMapFldsUGEN =
&rcRAFLServConfigUGEN.AppendMapField("0.RELCONT_PCODE.RELATED_ACT.4");
&rcRAFLMapFldsUGEN.ParameterName = "PTCS_MENUFIELD";
&rcRAFLMapFldsUGEN.PnlName = "PCODEAPI_MAINCOMP";
&rcRAFLMapFldsUGEN.MapFieldType = "PF";
&rcRAFLMapFldsUGEN.RefreshService = "N";
&rcRAFLMapFldsUGEN.MapNullValue = "N";
&rcRAFLMapFldsUGEN.FieldMenuOpt = "Y";
&rcRAFLMapFldsUGEN.SeqNumFmnu = 0;
&bRet = &rcRAFLServConfigUGEN.Save();

/* RMenuLayout, RMenuFolder, and RMenuLink create */
Local PTCS_MENULAYOUT:RMenuLayout &rcRAFLMenuLayout =
&rcRAFLServConfigUGEN.AddPageFieldMenu("PCODEAPI_MAINCOMP.4",
"0.RELCONT_PCODE.RELATED_ACT.4");
Local PTCS_MENULAYOUT:RMenuFolder &rcRAFLMenuFolder =
&rcRAFLMenuLayout.AddFolder("Root", Value(&rcRAFLServConfigUGEN.SeqNum));
&rcRAFLMenuFolder.PrntFolderId = &rcRAFLMenuFolder.FolderId;

Local PTCS_MENULAYOUT:RMenuLink &rcRAFLMenuLinkUGEN =
&rcRAFLMenuFolder.AppendMenuLink(&rcRAFLServConfigUGEN.ServiceId,
&rcRAFLServConfigUGEN.InstanceId);
&bRet = &rcRAFLMenuLayout.Save();

%Response.RedirectURL(%Request.GetHeader("Referer"));

```

Rowset Class

Understanding Rowset Class

A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

If a rowset object is instantiated using `GetRowset` (either the function or one of the methods) the rowset object that is instantiated is populated with data according to the context in which it was instantiated.

If a rowset object is instantiated using the `CreateRowset` function, the rowset object that's instantiated is a standalone rowset. Any records and field references created by this function are initialized to null values, that is, they do *not* contain any data. You can populate this rowset object using the `CopyTo`, `Fill`, or `FillAppend` methods.

Default processing isn't performed on a standalone rowset. In addition, a standalone rowset isn't tied to the Component Processor. When you fill it with data, no PeopleCode runs (for example, `RowInsert`, `FieldDefault`, and so on.) Delete and insert activity on these types of rowsets aren't automatically applied at save time. Use standalone rowsets for work records.

You might use a rowset object and the `ActiveRowCount` property to iterate over all the rows of the rowset, or to access a specific row (using the `GetRow` method) or to find the name of the primary record associated with the scroll (the `DBName` property).

The Rowset class is one of the data buffer access classes.

Related Topics

- PeopleCode Developer's Guide: Using Standalone Rowsets
- PeopleCode Developer's Guide: Understanding Data Buffer Access

Shortcut Considerations

The default method for the Rowset class is `GetRow`. This means you can specify just a row number, and not use the `GetRow` method. For example, the following two lines of code are equivalent:

```
&MyRow = GetRowset()(5);
```

```
&MyRow = GetRowset().GetRow(5);
```

Data Type of a Rowset Object

Rowset objects are declared as type `Rowset`. For example,

```
Local Rowset &MYROWSET;
```

Scope of a Rowset Object

A Rowset can be instantiated from PeopleCode or using Java.

This object can be used anywhere you have PeopleCode, that is, in an Application Class, record field PeopleCode, and so on.

You can't pass a rowset object in as part of a Component Interface user-defined method. (Rowsets aren't common data structures outside of a PeopleSoft system.) However, within a user-defined method for a Component Interface you can use rowset objects.

In an Application Engine program, a rowset object is the equivalent of a record object that contains one row and a single record, that is, the State Record. PeopleSoft suggests using the Record object instead of a rowset object to obtain access to the State Record.

Messages have the same structure as rowsets, that is, hierarchical data structures composed of rows, records, and fields.

File objects can have the same structure as rowsets, that is, hierarchical data structures composed of rows, records, and fields.

Related Topics

- PeopleCode Developer's Guide: Using Standalone Rowsets

Rowset Class Built-In Functions

PeopleCode Language Reference: CreateRowset function

PeopleCode Language Reference: CreateRowset function

PeopleCode Language Reference: GetRowset function

Rowset Class Methods

In this section, we discuss the Rowset class methods. The methods are discussed in alphabetical order.

ClearDeletesChanges method: Rowset class

Syntax

```
ClearDeletesChanges()
```

Description

Use the ClearDeletesChanges method to clear deleted rows and changed from a standalone rowset.

Note

This method works only with standalone rowsets, that is, rowsets created using the CreateRowset function.

This method differs from Flush in a number of ways:

- it does not remove *all* rows from the rowset, only deleted rows
- it only applies to standalone rowsets

This method first clears the deleted rows, that is, all rows that have been deleted using DeleteRow are removed from the rowset and their associated buffers are freed.

This method then clears changed rows. That means any changes done on a row (such as field values changed) or newly inserted rows are now propagated into their original state and the changed buffers, if any, are freed.

After executing this method on a standalone rowset, any row that was previously new or changed no longer has that state. The IsNew and IsChanged properties of a row return false.

This method does *not* do any database updates.

How would you use this method? Suppose you use a standalone rowset to track changes you need to make to some business process or object. After doing the appropriate database updates to reflect changes recorded in the rowset (that is, inserts or deletes or changes), you call this method to clean up the rowset in preparation for further processing. Without this method, newly inserted rows and changed rows preserve their IsNew and IsChanged status indefinitely, complicating program logic and potentially leading to duplicate inserts or deletes.

Parameters

None.

Returns

None.

Example

```
REM +-----+;
REM | Function to Update the DB for a Standalone Rowset|;
REM +-----+;
Function ProcessDatabaseUpdateForRowset(&rsIn As Rowset)
```

```
    For &i = 1 To &rsIn.RowCount

        &rwTMP = &rsIn.GetRow(&i);
        If &rwIn.IsDeleted And
            Not &rwIn.IsNew Then
            &rTMP = &rwIn.GetRecord(1);
            &rTMP.Delete();
        End-If;

        If &rwTMP.IsNew And
            &rwTMP.IsChanged And
            Not &rwTMP.IsDeleted Then

            &rTMP = &rwTMP.GetRecord(1);
            &rTMP.Insert()
        End-If;

        If Not &rwTMP.IsNew And
            &rwTMP.IsChanged And
```

```

        Not &rwTMP.IsDeleted Then

            &rTMP = &rwTMP.GetRecord(1);
            &rTMP.Update();
        End-If;

    End-For;

    REM +-----+;
    REM | Now we need to reset the Rowset flags and      |;
    REM | remove deleted rows                          |;
    REM +-----+;
    &rsIn.ClearDeletesChanges();

End-Function;

```

Related Topics

- [Flush method: Rowset class](#)
- [FlushRow method: Rowset class](#)
- [IsChanged property: Row class](#)
- [IsNew property: Row class](#)

CopyTo method: Rowset class

Syntax

```
CopyTo(&DestRowset [, record_list])
```

Where *record_list* is a list of record names in the form:

```
[RECORD.source_recname1, RECORD.target_recname1

[, RECORD.source_recname2, RECORD.target_recname2]]. . .
```

Description

The CopyTo method copies *from* the rowset executing the method *to* the specified destination rowset, copying *like-named* record fields and subscrolls at corresponding levels.

The CopyTo method uses the current data in the rowset. This might be different from the original data values if the rowset was retrieved from the database and values in it have been changed either by an end-user or a PeopleCode program

If pairs of source and destination record names are given, these are used to pair up the records and subscrolls *before* checking for like-named record fields. Then, after copying the named records pairs, this method copies *all* identically named records.

Note

This method does not work for Application Engine state records. If you don't specify *record_list*, both the record name *and* the field name have to match exactly for data to be copied from one record field to another. If you specify *record_list*, after the records have been paired up, the field names have to match before any data is copied.

If the rowset you are copying *from* has the field level `EditError`, as well as the `MessageNumber` and `MessageSetNumber` properties set, these values are copied to the rowset you are copying to. For example, suppose you had an application message that had errors. Using the `GetSubContractInstance` function, these errors would be copied into the message object. From there, you could instantiate a message rowset, copy the message rowset into a work rowset, and use the work rowset to populate Component buffers. (After the field properties are set, the `Record`, `Row`, and `Rowset` properties `IsEditError` also get set.)

In order to copy all of the properties of the fields from the source rowset, the source and target scrolls must have exactly the same shape:

- The names of the records in the source and target scrolls must be the same.
- If there are subscrolls in the source scroll, then the same number of subscrolls must exist in the target scroll.
- The names of the records in any source subscrolls and target subscrolls must be the same.

Parameters

Parameter	Description
<i>&DestRowset</i>	Specify the rowset to be copied to. This Rowset object must have already been instantiated.
<i>SourceRecname</i>	Specify a record to be copied from, in the Rowset object being copied from.
<i>DestRecname</i>	Specify a record to be copied to, in the Rowset object to be copied to.

Returns

None.

Example

If you set one rowset equal to another, you haven't made a copy of the rowset. Instead, you have two variables pointing to the *same* data.

To make a clone of an existing rowset, that is, to make two distinct copies, you can do the following:

```
&RS2 = CreateRowset(&RS);  
&RS.CopyTo(&RS2);
```

The following example copies data from one rowset object to another. Because no like-named records exist between the two rowsets, the record names are specified. Only the like-named fields are copied from one rowset to the other:

```
Local Rowset &RS1, &RS2;  
Local String &EMPLID;  
  
&RS1 = CreateRowset(RECORD.PERSONAL_DATA);  
&RS2 = CreateRowset(RECORD.PER_VENDOR_DATA);  
&EMPLID = "8001";  
&RS1.Fill("WHERE EMPLID =: 1", &EMPLID);  
&RS1.CopyTo(&RS2, RECORD.PERSONAL_DATA, RECORD.PER_VENDOR_DATA);
```

The following example copies data from a message into the Component buffers, then calls the page (using `TransferPage`) to redraw the page. You could do this to fill a page with message data that is in error, so that an end-user can make corrections to the message data. `&WRK_ROWSET0` is the level zero rowset and `&WRK_ROWSET1` is where the data is copied to.

```
/* Get the Message */  
&MSG = GetSubContractInstance(&PUBID, &PUBNODE, &CHNLNAME, &MSGNAME,  
&SUBNAME);  
  
/* Get the Message Rowset */  
&MSG_ROWSET = &MSG.GetRowset();  
  
/* Get Level 0 */  
&WRK_ROWSET0 = GetLevel0();  
  
/* Create Work rowset */  
&WRK_ROWSET1 = GetLevel0()(1).GetRowset(SCROLL.EN_REVISION_TMP);  
  
/* Populate Work Rowset */  
&MSG_ROWSET.CopyTo(&WRK_ROWSET1, RECORD.EN_REVISION, RECORD.EN_REVISION_TMP);  
  
SetNextPage("EN_REVISION_MSG");  
  
TransferPage();
```

Related Topics

- [CopyTo method: Row class](#)
- PeopleCode Language Reference: `CreateRowset` function
- PeopleCode Developer's Guide: Assigning Objects

DeleteRow method: Rowset class

Syntax

```
DeleteRow(n)
```

Description

The DeleteRow method deletes the row in the rowset identified by the parameter.

If the program is being run from a component against Component buffer data, a RowDelete PeopleCode event also fires, followed by the events that normally follow a RowDelete, as if the user had manually pressed **ALT+8** and **ENTER**.

This method initially marks the row as needing to be deleted. At save time the row is actually deleted from the database and cleared from the buffer. When the row is marked as deleted, it is ignored by other methods, such as GetCurrEffRow, Sort, and so on.

DeleteRow cannot be executed from the same rowset where the deletion takes place, or from a child rowset against a parent. Place your PeopleCode in a parent rowset and execute it against a child rowset.

When DeleteRow is used in a loop, you have to process rows from high to low to achieve the correct results, that is, you must delete from the bottom up rather than from the top down. This is necessary because the rows are renumbered after they are deleted (if you delete row one, row two becomes row one).

Note

If you use DeleteRow on a rowset created using the CreateRowset function, the row isn't automatically deleted in the database when the page is saved. Rowsets created using the CreateRowset function are standalone rowsets, not tied to the database, so there are no database updates when they are manipulated. Delete and insert activity on these types of rowsets aren't automatically applied at save time.

Parameters

Parameter	Description
<i>n</i>	An integer identifying a row within the rowset object. This must be ≥ 1 and $\leq$ the number of active rows in the rowset (see ActiveRowCount).

Returns

An optional Boolean value: True if row is deleted, False otherwise.

Example

In the following example DeleteRow is used in a For loop. The example checks a value in each row, then conditionally deletes the row. Note the syntax of the For loop, including the use of the -1 in the Step clause to loop from the highest to lowest values. This ensures that the renumbering of the rows do not affect the loop.

```
For &I = &RS2.ActiveRowCount To 1 Step -1
    If None(&CHECK_SEQ) Then
        &RS2.DeleteRow(&I);
    End-If;
End-For;
```


Related Topics

- [Flush method: Rowset class](#)
- [FlushRow method: Rowset class](#)
- [InsertRow method: Rowset class](#)
- [Insert method: Record class](#)
- PeopleCode Developer's Guide: Using Standalone Rowsets

Fill method: Rowset class

Syntax

```
Fill([wherestring [, bindvalue] . . .])
```

Description

The Fill method flushes the rowset then reads records from the database into successive rows. The records are read from the database tables corresponding to the primary database record of the scroll into that record. The records are selected by the optional *wherestring* SQL clause, in which the optional *bindvalues* are substituted, using the usual bind placeholders (:*n*).

In general, use this method only with rowsets that were created using the CreateRowset function.

Note

Because Flush always leaves one row in the scroll, there will be one row in the scroll even if you don't read any records.

The actual number of records read into the rowset is an optional return of this method.

Note

This method does not work with Application Engine state records. Also, you cannot use this method in dynamic views.

When this method executes, unlike the Select method, it does *not* cause any associated PeopleCode to run as part of reading data into the rowset.

Note

Fill reads only the primary database record. It does not read any related records, nor any subordinate rowset records.

For every record read with the Fill method, if the set language is not the base language and the record has related language records, the Fill method tries to read the related language record and does related language processing.

The Fill method uses a correlation ID of FILL for the table it reads. You must use the correlation ID if you want to refer to the rowset table name as part of the *wherestring*. You receive a runtime error if you use the table name as a column prefix instead of the correlation ID.

Parameters

Parameter	Description
<i>wherestring</i>	Specify a SQL WHERE clause to use for selecting records to fill the rowset. This can be a string or a SQL definition.
<i>bindvalue</i>	Specify optional bind variables to be used with the WHERE clause.

Returns

The number of records read into the rowset.

Example

The following example reads all of the QA_MYRECORD records into a rowset, and returns the number of rows read:

```
&RS = CreateRowset(RECORD.QA_MYRECORD);  
&NUM_READ = &RS.Fill();
```

The following example reads all of the QA_MYRECORD records that have a MYRECORD field equal to the value of &UVAL into a rowset, and returns the number of rows read:

```
&NUM_READ = &RS.Fill("where MYRECORD = :1", &UVAL);
```

To re-use a WHERE clause for the *wherestring* you can use the SQL repository, and a SQL object.

```
&NUM_READ = &RS.Fill(SQL.MYWHERE, &UVAL);
```

The following example gets all the SET_CNTRL_REC rows related to the row on the page, then updates SETID with the value from the page. Fill is used with a rowset that was created from a message that was just created, that is, a rowset that was unpopulated.

```
If FieldChanged(SETID) Then  
    &MSG = CreateMessage(OPERATION.SET_CNTRL_REC);  
    &MSG_ROWSET = &MSG.GetRowset();  
    &MSG_ROWSET.Fill("where SETCNTRLVALUE =:1 and REC_GROUP_ID =:2",  
SETCNTRLVALUE,⇒  
    REC_GROUP_ID);  
  
For &I = 1 To &MSG_ROWSET.ActiveRowCount  
    &MSG_ROWSET.GetRow(&I).SET_CNTRL_REC.SETID.Value = SETID;  
    &MSG_ROWSET.GetRow(&I).PSCAMA.AUDIT_ACTN.Value = "C";  
End-For;  
  
&MSG.Publish();
```

End-If;

When using the Fill method, the IsChanged property of each field in a part rowset is not set to true. Because the fields appear to be unchanged, this can create a problem for publication of data from Message rowsets. A technique to avoid this problem is to create a second rowset and use the CopyTo method to copy the changes to the Message rowset as shown in the following example:

```
&a = CreateMessage(Operation.MY_ASYNC);
&rs = &a.GetPartRowset(1);

&trs = CreateRowset(Record.PSPMAGENT);
&trs.Fill("where PM_AGENTID >= 12345");

&trs.CopyTo(&rs);
%IntBroker.Publish(&a);
```

The following example uses a correlation ID for the table in the Fill SELECT, to enable the use of correlated subqueries in the WHERE clause, such as the usual effective-date subquery:

```
&RSOWNER_NAME = CreateRowset(RECORD.PERSONAL_D00);
&RSOWNER_NAME.Fill("where SETID=:1 AND EMPLID=:2 AND %EffDtCheck(PERSONAL_⇒
D00,FILL,:3)", &SETID, &EMPLID, &EFFDT);
```

The Fill method implicitly uses Fill as an alias for the Rowset record. This is helpful for complex Fill *where* clauses with subqueries.

```
&oprclasscountries = CreateRowset(Record.SCRTY_TBL_GBL);

&oprclasscountries.Fill("WHERE FILL.OPRCLASS = :1 AND NOT EXISTS (SELECT 'X'
FROM⇒
PS_SCRTY_SEC_GBL GBL2 WHERE GBL2.OPRCLASS = FILL.OPRCLASS AND GBL2.COUNTRY ⇒
FILL.COUNTRY AND GBL2.PNLNAME = :2)", &OPRCLASS, %Component);
```

In the following example, the necessary key field values are loaded into a rowset, then the following function is called, and the values are used as part of the Fill method.

```
Function FillRS2();
  Local SQL &MySql;
  Local string &MySqlString;
  Local Record &ElemDefnRec;
  Local string &ElemDefnRecName, &fldname;
  Local Rowset &CompRec2RS;
  /* Build the record object that is used for building the SQL and executing
the⇒
select */
  &ElemDefnRec = CreateRecord(@("Record." | &pkgRecName));
  /* Initialize the SQL string */
  &MySqlString = "%SelectByKey(:1 A)";
  /* Create a SQL to select a rows based on the key fields. */
  For &i = 1 To &ElemDefnRec.FieldCount
    If &ElemDefnRec.GetField(&i).IsKey Then
```

```

        &fldname = &ElemDefnRec.GetField(&i).Name;
        &ElemDefnRec.GetField(&i).Value = &CompRec2RS.GetRow(1).GetRecord(@⇒
("Record." | &pkgRecName)).GetField(@"Field." | &fldname)).Value;
    End-If;
End-For;
/* Create the SQL and execute the select */
&MySql = CreateSQL(&MySqlString);
&MySql.Execute(&ElemDefnRec);
/* Copy each selected row into the rowset */
While &MySql.Fetch(&ElemDefnRec)

&ElemDefnRec.CopyFieldsTo(&CompRec2RS(&CompRec2RS.ActiveRowCount).GetRecord⇒
(1));
    End-While;
End-Function;

```

Sorting Considerations

Rows come unsorted from the database when using Fill. This is not a problem for SQL server, however, it can be a problem for DB2 for OS/390 and z/OS and Oracle.

See [Sort method: Rowset class](#).

Related Topics

- [CopyTo method: Rowset class](#)
- [Select method: Rowset class](#)
- [FillAppend method: Rowset class](#)
- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- PeopleCode Language Reference: CreateRowset function
- Global Technology: Understanding Related Language Tables

FillAppend method: Rowset class

Syntax

```
FillAppend([wherestring [, bindvalue] . . .])
```

Description

The FillAppend method reads records from the database into successive rows of the rowset starting *after* the last row that exists in the rowset. Unlike Fill, it doesn't first flush the rowset.

Note

FillAppend appends rows after the last *active* row in the rowset. If you have deleted rows in the rowset, they will still be the last rows.

When a rowset is selected into, any autoselected child rowsets are also read. The child rowsets are read using a where clause that filters the rows according to the where clause used for the parent rowset, using a subselect.

When a rowset is created using `CreateRowset`, it contains one empty row. If the rowset hasn't been filled with data, `FillAppend` fills that row also (so you don't have an empty row at the start of your rowset.)

The records are read from the database tables corresponding to the primary database record of the scroll into that record. The records are selected by the optional *wherestring* SQL clause, in which the optional *bindvalues* are substituted, using the usual bind placeholders (:n).

In general, use this method only with rowsets that were created using the `CreateRowset` function.

The actual number of records read into the rowset is an optional return of this method.

Note

This method does not work with Application Engine state records. Also, you cannot use this method in dynamic views.

When this method executes, unlike the `Select` method, it does *not* cause any associated PeopleCode to run as part of reading data into the rowset.

Note

`FillAppend` reads only the primary database record. It does not read any related records, nor any subordinate rowset records.

For every record read with the `FillAppend` method, if the set language is not the base language and the record has related language records, the `FillAppend` method tries to read the related language record and does related language processing.

The `FillAppend` method uses a correlation ID of `FILLAPPEND` for the table it reads. You must use the correlation ID if you want to refer to the rowset table name as part of the *wherestring*. You receive a runtime error if you use the table name as a column prefix instead of the correlation ID.

Parameters

Parameter	Description
<i>wherestring</i>	Specify a SQL WHERE clause to use for selecting records to fill the rowset. This can be a string or a SQL definition.
<i>bindvalue</i>	Specify optional bind variables to be used with the WHERE clause.

Returns

The number of records read into the rowset.

Example

The following example reads all of the QA_MYRECORD records that have a MYRECORD field equal to the value of &UVAL into a rowset, and returns the number of rows read:

```
&NUM_READ = &RS.FillAppend("where MYRECORD = :1", &UVAL);
```

To re-use a WHERE clause for the *wherestring* you can use the SQL repository, and a SQL object.

```
&NUM_READ = &RS.FillAppend(SQL.MYWHERE, &UVAL);
```

Related Topics

- [CopyTo method: Rowset class](#)
- [Select method: Rowset class](#)
- [Fill method: Rowset class](#)
- [Understanding SQL Class](#)
You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.
- PeopleCode Language Reference: CreateRowset function
- Global Technology: Understanding Related Language Tables

FillChunk method: Rowset class

Syntax

```
FillChunk([[wherestring] [orderbystring] [, bindvalue] . . .], begin_row,  
end_row)
```

Description

Use the FillChunk method to read records from the database into successive rows of the rowset starting at *begin_row*. Unlike Fill, FillChunk doesn't first flush the rowset. In general, use this method only with rowsets that were created using the CreateRowset function.

When a rowset is selected into, any autoselected child rowsets are also read. The child rowsets are read using a where clause that filters the rows according to the where clause used for the parent rowset, using a subselect.

The records are read from the database tables corresponding to the primary database record of the scroll into that record. The records are selected by the optional *wherestring* SQL clause, in which the optional bind values are substituted, using the usual bind placeholders (:n).

The actual number of records read into the rowset is an optional return of this method.

Note

This method does not work with Application Engine state records. Also, you cannot use this method in dynamic views.

When this method executes, unlike the Select method, it does not cause any associated PeopleCode to run as part of reading data into the rowset.

Note

FillChunk reads only the primary database record. It does not read any related records, nor any subordinate rowset records.

For every record read with the FillChunk method, if the set language is not the base language and the record has related language records, the FillChunk method tries to read the related language record and does related language processing.

The FillChunk method uses a correlation ID of FILLAPPEND for the table it reads. You must use the correlation ID if you want to refer to the rowset table name as part of the *wherestring*. You receive a runtime error if you use the table name as a column prefix instead of the correlation ID.

Parameters

Parameter	Description
<i>wherestring</i>	Specifies an optional SQL WHERE clause to use for selecting records to fill the rowset. This can be a string or a SQL definition.
<i>orderbystring</i>	Specifies an optional SQL ORDER BY clause.
<i>bindvalue</i>	Specifies optional bind variables to be used with the WHERE clause.
<i>begin_row</i>	Specifies the start row location in the target rowset as an integer value.
<i>end_row</i>	Specifies the end row location in the target rowset as an integer value.

Returns

(Optional) The number of rows read into the rowset.

Example

```
&RS = CreateRowset(Record.PSAUTHITEM);  
&RS.FillChunk("where FILL.CLASSID = :1 order by FILL.CLASSID, :2, :3 ",  
"PTMSF_CLIENT_USER", 6, 10);
```

Find method: Rowset class

Syntax

```
Find(search_string, row_number)
```

Description

Use the Find method to search for a string value in a rowset starting at *row_number*, if specified.

The Find operation is case-insensitive. It is a full-match search, that is, the search checks field values containing the entire string passed to the Find method. For example, searching on the string *dict* returns the field whose value is *dictionary*. However, partial matches aren't recognized. For example, searching on the string *position* does not consider a field value of *Pos* to be a match.

Parameters

Parameter	Description
<i>search_string</i>	Specifies the text to search as a String.
<i>row_number</i>	This parameter is optional. Specifies the row number to start the search. Specify 1 to initiate the search in the first row of the rowset. If the given row number is beyond the rowset bounds then the search starts at the first row. If the row number is not specified, search starts from the row where the previous Find operation completed. If this is the first search, then the search starts at the first row.

Returns

A Field Class object whose value contains the string. Null if the search string is not found.

Example

```
Local Rowset &rs = GetRowset(Scroll.PS_FLUID_SA);
Local Field FieldObject = &rs.Find("String to Find");
if All(FieldObject) then /* found */
    /* 1. Application makes sure that the field can be properly accessed: */
    /*     move scroll area rows into position or expand collapsed
groupboxes etc. */
    FieldObject.FindDisplay = true;
    /* re-renders the field with new attributes (unless already editable)
and sets focus */
    /* re-renders last field found without the additional attributes, if any
*/
else
    MessageBox("String not found");
end-if;
```


Restrictions of the Find Method in Rowset

Consider the following restrictions of the Find method:

- Only the first instance of a string in a row is found.
- It searches for matches in edit boxes, display-only fields, disabled fields, dynamic links, and text in long edit boxes.
- It searches for matches in individual fields, so it does work on related display fields that are usually a combination of multiple field values. For example, if a related display field combines the country code (USA) with the country description (United States), then a search string of *USA United States* does not find a match. However, a search for *USA* or *United States* does find a match.
- It ignores fields in HTML areas.
- It does not find column headings, field labels, text values in icons, static links, and hidden fields.
- It works on a rowset that exists on the current page. Returns a null value if the rowset does not exist on the current page.
- It only works on Component Buffer rowsets. All rows in the rowset must be loaded into the component buffer, not necessarily displayed though.
- It does not work on Standalone rowsets, Message rowsets, Component Interface rowsets or Application Engine rowsets. Also, it does not work with the TopLevel rowset as it doesn't represent a scroll.
- It does not work on a fluid grid that uses lazy scrolling.
- After finding a match, the Find method does not attempt to set the focus on the field or scroll the row into view because it may alter the expected display of the page. So, application developers should ensure that the user interface is updated with the result of the Find operation or use the FindDisplay property of the Field class.

Note

The Find method does not change the focus nor does it set or clear the FindDisplay property on a field.

Related Topics

- [FindDisplay property: Field class](#)

Flush method: Rowset class

Syntax

Flush()

Description

Use the Flush method to remove all rows from the rowset and free its associated buffer. Rows that are flushed are not deleted from the database. This function is often used to clear a work scroll before using the Select method.

Note

Flush always leaves one row in the scroll.

You cannot flush the current context of the executing program. This means Flush cannot be used for the rowset containing the executing program, or in any child rowset and executed against the parent rowset. Place your PeopleCode in a parent rowset and execute it against a child rowset.

For rowsets corresponding to component buffer data, the Flush method executes in turbo mode only—that is, default processing is performed, but only on the row being flushed. Additional information on turbo mode and non-turbo mode is available in the documentation with the InsertRow PeopleCode built-in function.

See PeopleCode Language Reference: InsertRow function.

Parameters

None.

Returns

None.

Example

The following example checks for the value of the field CHECKLIST_CD. If something exists in this field, the second level rowset is flushed and new values are selected into it.

```
If All(CHECKLIST_CD) Then
    &RS1H.Flush();
    &RS1H.Select(RECORD.CHECKLIST_ITEM, "where Checklist_CD = :1 and EffDt = ⇒
(Select Max(EffDt) from PS_CHECKLIST_ITEM Where CheckList_CD = :2)",
CHECKLIST_CD, ⇒
CHECKLIST_CD);
End-If;
```

Considerations When Initializing New Rows

Flush removes all rows and inserts a row.

If you want to initialize the row, that is, have the defaults and any RowInit PeopleCode run, you must do something to invoke the default value processing. This can be as simple as setting the value of another field on the same page that has a PeopleCode program associated with it.

If the rowset is created from message data, an Application Engine program, and so on, the rows are flushed but the row that is inserted is not initialized.

Considerations for User-Sorted Grids

If a grid has a user personalized sort defined for it and your PeopleCode program flushes that grid and then repopulates it (for instance, through a Fill, a Select, or a series of InsertRow calls), this could invalidate the user's personalized sort and the current row in the user's view unless your PeopleCode program makes arrangements to reapply these user personalizations.

After flushing and repopulating the rowset, your PeopleCode program should re-sort the rowset (that is, re-sort the grid). If the user has a personalized sort, then the user's personalized sort will be reapplied via the PeopleCode sort.

In addition, *for classic applications only*, after flushing and repopulating a grid, it will be important to manage which row is deemed the current row. This can be managed using methods such as `IsUserSorted`, `GetFirstUserSortedRow`, `MapBufRowToUserSortRow`, and then by setting the `TopRowNumber` property accordingly.

For example:

```
Local Rowset &rsGridResults = GetLevel0()(1).GetRowset(Scroll.PSWORKLIST);
&rsGridResults.Sort(PSWORKLIST.BUSPROCNAME);

/* For classic only, also identify the top row. */
If &rsGridResults.IsUserSorted("WORKLIST.PSWORKLIST") Then
    &rsGridResults.TopRowNumber =
&rsGridResults.GetFirstUserSortedRow("WORKLIST.PSWORKLIST").RowNumber;
End-If;
```

See [IsUserSorted method: Rowset class](#).

Related Topics

- [FlushRow method: Rowset class](#)
- [DeleteRow method: Rowset class](#)
- [InsertRow method: Rowset class](#)

FlushRow method: Rowset class

Syntax

`FlushRow(n)`

Description

Use the `FlushRow` method to remove a specific row from a rowset and from the Component buffer. Rows that are flushed are not deleted from the database.

`FlushRow` is a specialized and infrequently used method. In most situations, you want to use `DeleteRow` to remove a row from the Component buffer and remove it from the database as well when the component is saved.

You cannot flush the current context of the executing program. This means `FlushRow` cannot be used for the rowset containing the executing program, or in any child rowset and executed against the parent rowset. Place your PeopleCode in a parent rowset and execute it against a child rowset.

Parameters

Parameter	Description
<i>n</i>	An integer identifying a row within the rowset object. This must be ≥ 1 and $\leq$ the number of rows in the rowset (see property <code>RowCount</code>).

Returns

None.

Example

```
&ROWSET.FlushRow(&ROWNUMBER);
```

Related Topics

- [DeleteRow method: Rowset class](#)
- [Flush method: Rowset class](#)
- [InsertRow method: Rowset class](#)

GetCurrEffRow method: Rowset class

Syntax

```
GetCurrEffRow()
```

Description

GetCurrEffRow returns a row object for the row with the current effective date. This includes dates equal to the current date, but not dates in the future. If the primary record associated with the rowset is not effective-dated this method returns a null object.

Newly inserted rows are intentionally skipped when looking for the current effective-dated row. This is to find the current effective row from the data that already exists in the database. In other words, a row cannot be considered as a current effective row until it is saved. To find the current effective-dated row in data that has been newly inserted and not yet saved, use the GetNewEffRow method instead.

Parameters

None.

Returns

A row object for the row with the current effective date.

Example

```
&tmp = &ROWSET.GetCurrEffRow().RowNumber;  
/* note RowNumber is a property of the row class */
```

Related Topics

- [DeleteEnabled property: Rowset class](#)
- [GetRow method: Rowset class](#)
- [GetNextEffRow method: Row class](#)
- [GetNewEffRow method: Rowset class](#)
- PeopleCode Language Reference: GetRow function

GetFirstUserSortedRow method: Rowset class

Syntax

```
GetFirstUserSortedRow(GridName)
```

Description

Use this method to get the first row from a sort view.

Parameters

Parameter	Description
<i>GridName</i>	Specify the grid name as a string in PAGE.RECORD format in which PAGE is the page name and RECORD is the name of the grid as defined in Application Designer. (In Application Designer, select Page Field Properties, General tab to view the value for the Page Field Name field. The Page Field Name field's value defaults to the primary record name for the level at which the grid occurs; however, the value can be changed by the application developer.)

Returns

A row object for the first row from the sort view.

If the grid has not been sorted, the output row object is equivalent to the first row from the rowset.

Related Topics

- [IsUserSorted method: Rowset class](#)

GetLastUserSortedRow method: Rowset class

Syntax

```
GetLastUserSortedRow(GridName [, visible])
```

Description

Use this method to get the last row from a sort view.

Parameters

Parameter	Description
<i>GridName</i>	Specify the grid name as a string in PAGE.RECORD format in which PAGE is the page name and RECORD is the name of the grid as defined in Application Designer. (In Application Designer, select Page Field Properties, General tab to view the value for the Page Field Name field. The Page Field Name field's value defaults to the primary record name for the level at which the grid occurs; however, the value can be changed by the application developer.)
<i>visible</i>	Specify, as an optional Boolean parameter, whether to return the absolute last row from the rowset, which could be hidden, or the last visible row from the sort view. If true, the last visible row is returned; otherwise, the absolute last row from the rowset is returned. The default value is false—that is, return the absolute last row.

Returns

A row object for the last row from the sort view (*visible* is true) or the absolute last row from the rowset (*visible* is false).

Related Topics

- [IsUserSorted method: Rowset class](#)

GetNewEffRow method: Rowset class

Syntax

```
GetNewEffRow( )
```

Description

GetNewEffRow returns a row object for the row with the effective date closest to the current date, including newly inserted rows. This means dates equal to the current date, but not future dates. If the primary record associated with the rowset is not effective-dated this method returns a null object.

To find the current effective-dated row from the data that already exists in the database, that is, only from saved rows and *not* a newly created row, use the GetCurEffRow method instead.

Parameters

None.

Returns

A row object for the row with the current effective date.

Example

```
Local Row &MyRow = &ROWSET.GetNewEffRow();
```

Related Topics

- [GetRow method: Rowset class](#)
- [GetNextEffRow method: Row class](#)
- [GetCurrEffRow method: Rowset class](#)
- [DeleteEnabled property: Rowset class](#)
- PeopleCode Language Reference: GetRow function

GetRow method: Rowset class

Syntax

```
GetRow(n)
```

Description

GetRow returns a row object from a rowset. This is a default method for rowsets. This means that any rowset object, followed by a parameter list, acts as if GetRow is specified.

Parameters

Parameter	Description
<i>n</i>	An integer identifying a row within the rowset object. This must be ≥ 1 and $\leq$ the number of rows in the rowset (see property RowCount).

Returns

Returns a row object for the specified row of the rowset.

Example

In the following example, all of the lines of code do the same thing: they return the 5th row from the rowset (&ROWSET is a rowset object.)

```
&ROW = GetRowset().GetRow(5);  
&ROW = GetRowset()(5);  
&ROW = &ROWSET.GetRow(5);  
&ROW = &ROWSET(5);
```

The following example loops through all the rows in a rowset:

```
Local rowset &LEVEL1;  
Local row &ROW;  
  
&LEVEL1 = GetRowset(SCROLL.EMPL_CHECKLIST);  
For &I = 1 to &LEVEL1.ActiveRowCount
```

```
        &ROW = &LEVEL.GetRow(&I);  
        /* do some processing */  
    End-For;
```

Related Topics

- [PeopleCode Language Reference: GetRow function](#)

HideAllRows method: Rowset class

Syntax

```
HideAllRows()
```

Description

HideAllRows hides all rows of the rowset. Using this method is equivalent to a loop setting the visible property of each row of the rowset to False.

You cannot hide rows in the current context of the executing program. This means HideAllRows cannot hide the rowset containing the executing program, or in any child rowsets and be executed against the parent rowset. Place your PeopleCode in a parent rowset and execute it against a child rowset.

Parameters

None.

Returns

None.

Example

The following example hides the second level scroll if a value exists in the NO_COMMENTS field in the first level of the scroll. The code is running from the first level of the scroll.

```
Local Rowset &RS1, &RS2;  
  
&RS1 = GetRowset();  
&RS2 = GetRowset(SCROLL.EMPL_CHKLIST_ITM);  
  
For &I = 1 to &RS1.ActiveRowCount  
    If ALL(&RS1.GetRow(&I).EMPLOYEE_CHECKLIST.NO_COMMENTS) Then  
        &RS2.HideAllRows();  
    End-If;  
/*other processing */  
End-For;
```

Related Topics

- [ShowAllRows method: Rowset class](#)
- [Visible property: Row class](#)

InsertRow method: Rowset class

Syntax

InsertRow(*n*)

Description

InsertRow programmatically performs the **ALT+7** and **ENTER** (RowInsert) function. InsertRow inserts a new row in the current rowset *after* the row specified by the parameter if the primary record for the rowset is not effective-dated or a standalone rowset. If the primary record for the rowset is effective-dated or a standalone rowset, the new row is inserted *before* the current row, and all values from the current row are copied into the new row, except for EFFDT, which is set to the current date.

In addition, InsertRow propagates the keys from the higher level (if any) into the inserted row.

If the program is being run from a component against Component buffer data, a RowInit PeopleCode event also fires, followed by the events that normally follow a RowInsert, as if the user had manually pressed **ALT+7** and **ENTER** .

The InsertRow method can be executed against the same rowset where the insertion will take place.

For rowsets corresponding to component buffer data, the InsertRow method executes in turbo mode only—that is, default processing is performed, but only on the row being inserted. Additional information on turbo mode and non-turbo mode is available in the documentation with the InsertRow PeopleCode built-in function.

See PeopleCode Language Reference: InsertRow function.

InsertRow cannot be executed from the same rowset where the insertion will take place, or from a child rowset against a parent. Place your PeopleCode in a parent rowset and execute it against a child rowset.

Note

If you use InsertRow on a rowset created using the CreateRowset function, the row isn't automatically inserted in the database when the page is saved. Rowsets created using the CreateRowset function are standalone rowsets, not tied to the database, so there are no database updates when they are manipulated. Delete and insert activity on these types of rowsets aren't automatically applied at save time.

Parameters

Parameter	Description
<i>n</i>	An integer identifying a row within the rowset object. This must be ≥ 0 and $\leq$ the number of active rows in the rowset (see property ActiveRowCount). A value of 0 inserts in front of the first row.

Returns

An optional Boolean value: True if the row is inserted, False if the row is not inserted.

Example

In the following example, as the primary database record isn't effective-dated, the new row is inserted *after* the second row in the rowset.

```
&ROWSET.InsertRow(2);
```

Effective-Dated Row Considerations

When a row is inserted, if that row contains child scrolls, this method also inserts an empty row for any child scrolls. The effective-date field for this empty row is also empty. The current date is *not* used.

Related Topics

- [DeleteRow method: Rowset class](#)
- [Delete method: Record class](#)
- PeopleCode Developer's Guide: Using Standalone Rowsets

IsUserSorted method: Rowset class

Syntax

```
IsUserSorted(GridName)
```

Description

Use this method to determine whether a user sort has been performed on the specified grid.

A *user sort* is defined as a user either having clicked on a column heading on the grid or having applied a sort order on the grid's customization page. In the case of a user sort, a *sort view* is created based on the sort order defined by the user. Since this sort view is for display purposes only, the underlying buffer is not sorted and remains in the non-sorted order. Four additional methods (GetFirstUserSortedRow, GetLastUserSortedRow, MapBufRowToUserSortRow, and MapUserSortRowToBufRow) enable you to interrogate this sort view. These methods can be used to map the sort view to the buffer, to map the buffer to the sort view, to retrieve the first user-sorted row, and to retrieve the last user-sorted row.

Note

When a grid includes a hyperlink field that is user-sortable, the hyperlink label must be set in PeopleCode prior to allowing the user to perform the sort. Alternatively, the buffer can be sorted on the hyperlink field in PeopleCode upon entry into the page.

Parameters

Parameter	Description
<i>GridName</i>	Specify the grid name as a string in PAGE.RECORD format in which PAGE is the page name and RECORD is the name of the grid as defined in Application Designer. (In Application Designer, select Page Field Properties, General tab to view the value for the Page Field Name field. The Page Field Name field's value defaults to the primary record name for the level at which the grid occurs; however, the value can be changed by the application developer.)

Returns

A Boolean value: true if a user sort has been performed on the grid, false otherwise.

Related Topics

- [GetFirstUserSortedRow method: Rowset class](#)
- [GetLastUserSortedRow method: Rowset class](#)
- [MapBufRowToUserSortRow method: Rowset class](#)
- [MapUserSortRowToBufRow method: Rowset class](#)
- [Sort method: Rowset class](#)

MapBufRowToUserSortRow method: Rowset class

Syntax

```
MapBufRowToUserSortRow(GridName, number)
```

Description

Use this method to return the sort view row number that corresponds to the specified buffer row number.

Parameters

Parameter	Description
<i>GridName</i>	Specify the grid name as a string in PAGE.RECORD format in which PAGE is the page name and RECORD is the name of the grid as defined in Application Designer. (In Application Designer, select Page Field Properties, General tab to view the value for the Page Field Name field. The Page Field Name field's value defaults to the primary record name for the level at which the grid occurs; however, the value can be changed by the application developer.)

Parameter	Description
<i>number</i>	Specify the row number of the row in the buffer.

Returns

The row number, as a number, of the row in the sort view.

If the grid has not been sorted, the output row number is the same as the buffer row number.

Example

```
&szSortViewName = "QE_PIA_SORT_GRID1.L2RSSORTTEST";
Local Rowset &rsCurrent = GetLevel0()(1).GetRowset(Scroll.QE_PIA_SORTEST2)
(1).Get⇒
Rowset(Scroll.QE_PIA_SORTEST3);

If &rsCurrent.IsUserSorted(&szSortViewName) Then
    WinMessage("QE_PIA_SORT_GRID1-Rowset1 User Sorted");
Else
    WinMessage("QE_PIA_SORT_GRID1-Rowset1 Not User Sorted");
End-If;

For &I = 1 To &rsCurrent.ActiveRowCount
    &index = &rsCurrent.MapBufRowToUserSortRow(&szSortViewName, &I);
    WinMessage("QE_PIA_SORT_GRID1-Rowset1, Buffer Row Index: " | &I | ",
Sort Row⇒
Index: " | &index | ", Description: " | &rsCurrent(&I).QE_PIA_⇒
SORTEST3.DESCR30.Value);
End-For;
```

Related Topics

- [IsUserSorted method: Rowset class](#)

MapUserSortRowToBufRow method: Rowset class

Syntax

```
MapUserSortRowToBufRow(GridName, number)
```

Description

Use this method to return the buffer row number that corresponds to the specified sort view row number.

Parameters

Parameter	Description
<i>GridName</i>	Specify the grid name as a string in PAGE.RECORD format in which PAGE is the page name and RECORD is the name of the grid as defined in Application Designer. (In Application Designer, select Page Field Properties, General tab to view the value for the Page Field Name field. The Page Field Name field's value defaults to the primary record name for the level at which the grid occurs; however, the value can be changed by the application developer.)
<i>number</i>	Specify the row number of the row in the sort view.

Returns

The row number, as a number, of the row in the buffer.

If the grid has not been sorted, the output row number is the same as the buffer row number.

Example

```
&szSortViewName = "QE_PIA_SORT_GRID1.L2RSSORTTEST";
Local Rowset &rsCurrent = GetLevel0()(1).GetRowset(Scroll.QE_PIA_SORTEST2)
(2).Get⇒
Rowset(Scroll.QE_PIA_SORTEST3);

If &rsCurrent.IsUserSorted(&szSortViewName) Then
    WinMessage("QE_PIA_SORT_GRID1-Rowset2 User Sorted");
Else
    WinMessage("QE_PIA_SORT_GRID1-Rowset2 Not User Sorted");
End-If;

For &I = 1 To &rsCurrent.ActiveRowCount
    &index = &rsCurrent.MapUserSortRowToBufRow(&szSortViewName, &I);
    WinMessage("QE_PIA_SORT_GRID1-Rowset2, Description: " |
    &rsCurrent(&index).QE_⇒
    PIA_SORTEST3.DESCR30.Value);
End-For;
```

Related Topics

- [IsUserSorted method: Rowset class](#)

Refresh method: Rowset class

Syntax

Refresh()

Description

Refresh reloads the rowset object from the database using the current page keys. This causes the page to be redrawn. The following code example refreshes the entire page:

```
GetLevel0().Refresh()
```

! Important

Do not call `GetLevel0().Refresh()` from any context that is not at level 0. You are likely to leave invalid pointers to objects that have been cleared from the buffer, which can result in an application server crash.

If you only want a specific scroll to be redrawn, you can use the refresh method with that rowset. You don't have to use a level zero rowset with this method. This is particularly useful after using `RemoteCall`.

i Note

If a scroll is marked as No Auto Select in Application Designer, Refresh will not work on it. The Refresh method clears the existing buffers and does a refresh from the database. You do *not* want to use this method if your rowset is based on message data. Instead, you can use the CopyTo Rowset method combined with `TransferPage`.

Parameters

None.

Returns

None.

Example

The following example refreshes the entire page.

```
&MyLevel0 = GetLevel0().Refresh();
```

The following example refreshes only the second level scroll of the page:

```
&RowSetLevel2.Refresh();
```

Related Topics

- [CopyTo method: Rowset class](#)
- PeopleCode Language Reference: `RemoteCall` function
- PeopleCode Language Reference: `TransferPage` function

Select method: Rowset class

Syntax

```
Select([paramlist], RECORD.selrecord [, wherestr, bindvars])
```

Where *paramlist* is a list of child rowsets, given in the following form:

```
SCROLL.scrollname1 [, SCROLL.scrollname2] . . .
```

The first *scrollname* must be a child rowset of the rowset object executing the method, the second *scrollname* must be a child of the first child, and so on.

Description

Select, like the related method SelectNew, reads data from the database tables or views into either a row or rowset object.

Note

This method is valid only when used with rowsets that reference data from the component buffers. You cannot use this method with a message rowset, a rowset from an Application Engine state record, and so on. You can't use this method with rowsets created using the CreateRowset function (use the Fill method instead.)

Select automatically places child rowsets in the rowset object executing the method under the correct parent row. If it cannot match a child rowset to a parent row, an error occurs.

When a rowset is selected into, any autoselected child rowsets is also read. The child rowsets are read using a where clause that filters the rows according to the where clause used for the parent rowset, using a subselect.

If you don't specify any child rowsets in *paramlist*, Select selects from a SQL table or view specified by *selrecord* into the rowset object executing the method.

If you specify a child rowset in *paramlist*, Select selects from a SQL table or view specified by *selrecord* into the child rowset specified in *paramlist*, under the appropriate row of the rowset executing the method.

If the rowset executing the method is a level zero rowset, and you specify Select without specifying any child rowsets with *paramlist*, the method reads only a single row, because only one row is allowed at level zero.

The rowset executing the method *does not* have to be a level zero rowset, so the Select method can produce the functionality of both the ScrollSelect and RowScrollSelect functions.

Note

For developers familiar with previous releases of PeopleCode: If the rowset executing the method is a level zero rowset, and you specify a child rowset with *paramlist*, this method functions exactly like ScrollSelect. If the rowset executing the method is not a level zero rowset, and no child rowsets are specified with *paramlist*, the method acts like RowScrollSelect.

The record definition of the table or view being selected from is called the *select record*, and identified with RECORD. *selrecord*. The select record can be the same as the primary database record associated with the rowset, or it can be a different record definition that has compatible fields. If you define a select record that differs from the primary database record for the rowset, you can restrict the number of fields that are loaded into the buffers on the client workstation by including only the fields that you actually need.

Select accepts a SQL string that can contain a WHERE clause restricting the number of rows selected into the object. The SQL string can also contain an ORDER BY clause to sort the rows.

Select and its related methods generate a SQL SELECT statement at runtime, based on the fields in the select record and the WHERE clause passed to them in the method parameters.

For rowsets corresponding to component buffer data, the Select method executes in turbo mode only—that is, default processing is performed, but only on the row being selected. Additional information on turbo mode and non-turbo mode is available in the documentation with the InsertRow PeopleCode built-in function.

See PeopleCode Language Reference: InsertRow function.

Parameters

Parameter	Description
<i>paramlist</i>	An optional parameter list, for specifying children rowsets of the rowset executing the method, as the rowset to be selected into. The first <i>scrollname</i> in <i>paramlist</i> must be a child rowset of the rowset executing the method, the second <i>scrollname</i> must be a child of the first child, and so on.
RECORD. <i>selrecord</i>	Specifies the select record. The <i>selrecord</i> record must be defined in Application Designer and be a build SQL table (using Build, Project) as a table or a view, unless <i>selrecord</i> is the same record as the primary database record associated with the rowset. <i>selrecord</i> can contain fewer fields than the primary record associated with the rowset, although it must contain any key fields to maintain dependencies with other records.
<i>wherestr</i>	Contains a WHERE clause to restrict the rows selected from <i>selrecord</i> and/or an ORDER BY clause to sort the rows. The WHERE clause can contain the PeopleSoft meta-SQL functions such as %DateIn() or %CurrentDateIn. It can also contain inline bind variables.

Parameter	Description
<i>bindvars</i>	A list of bind variables to be substituted in the WHERE clause. The same restrictions that exist for SQLExec exist for these variables. See SQLExec for further information.

Returns

The number of rows read (optional.) This counts only the lines read into the specified rowset. It does not include any additional rows read into any child rowsets of the rowset.

Example

The following example selects into the level zero rowset, only one row. Depending on the autoselect settings on any child scrolls, they may be reselected too.

```
&LEVEL0 = GetLevel0();
&LEVEL0.Select(RECORD.PERSONAL_DATA, "WHERE. . .");
```

The following example selects into the level one scroll specified. Depending on the autoselect settings on any child (level two) scrolls, they may also be selected.

```
&LEVEL0.Select(SCROLL.EMPL_CHECKLIST, RECORD.EMPL_CHECKLIST, "WHERE. . .");
```

The following example selects into the child scroll of the level one rowset. Each row fetched is placed under the appropriate row in &LEVEL1. Note that instead of hard-coding the WHERE clause, the SQL repository is used to access a SQL definition named SELECT_WHERE.

```
&LEVEL1 = &LEVEL0()(1).GetRowset(SCROLL.EMPL_CHECKLIST);
&LEVEL1.Select(SCROLL.EMPL_CHKLIST_ITM, RECORD.EMPL_CHKLIST_ITM,
SQL.SELECT_WHERE);
```

The following example first flushes the hidden work scroll, then selects into it based on a field on the page.

```
&RS1H.Flush();
&RS1H.Select(RECORD.CHECKLIST_ITEM, "where Checklist_CD = :1 and EffDt =
(Select⇒
Max(EffDt) from PS_CHECKLIST_ITEM Where CheckList_CD = :2)", CHECKLIST_CD,⇒
CHECKLIST_CD);
```

Related Topics

- [SelectNew method: Rowset class](#)
- [SelectByKey method: Record class](#)

SelectNew method: Rowset class

Syntax

```
SelectNew([parmlist], RECORD.selrecord [, wherestr, bindvars])
```

Where *paramlist* is a list of child rowsets, given in the following form:

```
SCROLL.scrollname1 [, SCROLL.scrollname2] . . .
```

The first *scrollname* must be a child rowset of the rowset executing the method, the second *scrollname* must be a child of the first child, and so on.

Description

The SelectNew method is similar to the Select method, except that all rows read into the rowset are marked *new* so they are automatically inserted into the database at Save time. This capability can be used, for example, to insert new rows into the database by selecting data using a view of columns from other database tables.

Note

This method is valid only when used with rowsets that reference data from the Component buffers. You cannot use this method with a message rowset, a rowset from an Application Engine state record, and so on. You can't use this method with rowsets created using the CreateRowset function (use the Fill method instead.)

Parameters

Parameter	Description
<i>paramlist</i>	An optional parameter list, for specifying children rowsets of the rowset executing the method, as the rowset to be selected into. The first <i>scrollname</i> in <i>paramlist</i> must be a child rowset of the rowset executing the method, the second <i>scrollname</i> must be a child of the first child, and so on.
RECORD. <i>selrecord</i>	Specifies the select record. The <i>selrecord</i> record must be defined in Application Designer and be a build SQL table (using Build, Project) as a table or a view, unless <i>selrecord</i> is the same record as the primary database record associated with the rowset. <i>selrecord</i> can contain fewer fields than the primary record associated with the rowset, although it must contain any key fields to maintain dependencies with other records.
<i>wherestr</i>	Contains a WHERE clause to restrict the rows selected from <i>selrecord</i> and/or an ORDER BY clause to sort the rows. The WHERE clause can contain the PeopleSoft meta-SQL functions such as %DateIn() or %CurrentDateIn. It can also contain inline bind variables.
<i>bindvars</i>	A list of bind variables to be substituted in the WHERE clause. The same restrictions that exist for SQLExec exist for these variables. See SQLExec for further information.

Returns

The number of rows read (optional.) This counts only the lines read into the specified rowset. It does not include any additional rows read into any child rowsets of the rowset.

Example

The following example selects rows from DATA2 and reads them into a level one scroll. If the user saves the page, these rows are inserted into DATA1.

```
&LEVEL0.SelectNew(SCROLL.DATA1, RECORD.DATA2, "Where SETID = :1 and CUST_ID  
=:2", ⇒  
CUSTOMER.SETID, CUSTOMER.CUST_ID);
```

If you use the same WHERE clause in more than one Select, you may want to use the SQL repository to store the SQL fragment. That way, if you ever want to change it, you will have to change it in only one place.

```
&LEVEL0.SelectNew(SCROLL.DATA1, RECORD.DATA2, SQL.Select_New);
```

Related Topics

- [Select method: Rowset class](#)
- [SelectByKey method: Record class](#)

SetDefault method: Rowset class

Syntax

```
SetDefault(recname.fieldname)
```

Description

The SetDefault method sets the value of the specified *recname.fieldname* to a null value in every row of the rowset. If this method is being run from a component against Component buffer data, the next time default processing is performed, this value is reinitialized to its default value: either a default specified in its record field definition or one set programmatically by PeopleCode located in a FieldDefault event. If neither of these defaults exist, the Component Processor leaves the field blank.

No default processing is performed against data that is not in the Component buffers.

Blank numbers correspond to zero on the database. Blank characters correspond to a space on the database. Blank dates and long characters correspond to NULL on the database. SetDefault gives each field data type its proper value.

Parameters

Parameter	Description
<i>recname.fieldname</i>	Specifies a field. The field must be in the specified record, on the rows of the rowset.

Returns

None.

Example

This example resets the PROVIDER to its null value. This field is reset to its default value when default processing is next performed:

```
If COVERAGE_SELECT = "W" Then
    &ROWSET.SetDefault(INS_NAME_TBL.PROVIDER);
End-if;
```

Related Topics

- [SetDefault method: Field class](#)
- PeopleCode Developer's Guide: Default Processing

ShowAllRows method: Rowset class

Syntax

```
ShowAllRows()
```

Description

ShowAllRows "unhides" all rows of the rowset object executing the method. Using this method is equivalent to a loop setting the visible property of each row of the rowset to True.

ShowAllRows cannot be executed from the same rowset you want to display, or from a child rowset against a parent. Place your PeopleCode in a parent rowset and execute it against a child rowset.

Parameters

None

Returns

None.

Example

```
&ROWSET.ShowAllRows();
```

Related Topics

- [HideAllRows method: Rowset class](#)
- [Visible property: Row class](#)

Sort method: Rowset class

Syntax

`Sort([paramlist,] sort_fields)`

Where *paramlist* is a list of child rowsets, given in the following form:

`SCROLL.scrollname1 [, SCROLL.scrollname2] . . .`

The first *scrollname* must be a child rowset of the rowset executing the method, the second *scrollname* must be a child of the first child, and so on.

And where *sort_fields* is a list of field specifiers in the form:

`[recordname.]field_1, order_1 [, [recordname.]field_2, order_2]_`

Description

Sort programmatically sorts the rows in a rowset. The rows can be sorted on one or more fields.

If you specify a child rowset in *paramlist*, Sort selects a set of child rowsets to be sorted. If you don't specify a child rowset in *paramlist*, the rowset executing the method is sorted.

The type of sort done by this function, that is, whether it is a linguistic or binary sort, is determined by the Sort Order Option on the PeopleTools Options page.

Note

The Sort method sorts only *visible* rows in a rowset. If the rowset you're sorting has hidden rows, the hidden rows are not sorted. Rows marked for deletion are also not sorted.

Parameters

Parameter	Description
<i>paramlist</i>	An optional parameter list, for specifying children rowsets of the rowset executing the method, as the rowset to be sorted. The first <i>scrollname</i> in <i>paramlist</i> must be a child rowset of the rowset executing the method, the second <i>scrollname</i> must be a child of the first child, and so on.
<i>sort_fields</i>	A list of field and order specifiers which act as sort keys. The rows in the rowset will be sorted by the first field in either ascending or descending order, then by the second field in either ascending or descending order, and so on.

Parameter	Description
<code>[recordname.]field_n</code>	Specifies a sort key field in the rowset. The <i>recordname</i> prefix is required if you've specified a field that is not on the current record.
<code>order_n</code>	A single-character string. "A" specifies ascending order; "D" specifies descending order.

Returns

None.

Example

The first example repopulates a rowset in a page programmatically by first flushing its contents, selecting new contents using `Select`, then sorting the rows in ascending order by `EXPORT_OBJECT.NAME`:

```
Function populate_rowset;  
  
    &RS1 = GetLevel0()(1).GetRowset(Scroll.EXPORT_OBJECT);  
    &RS1.Flush();  
    &RS1.Select(Record.EXPORT_OBJECT, "where export_type  
=:EXPORT_TYPE_VW.EXPORT_TYPE");  
    &RS1.Sort(EXPORT_OBJECT.NAME, "A");  
  
End-Function;
```

Related Topics

- [IsUserSorted method: Rowset class](#)
- [Select method: Rowset class](#)
- [GetRowset method: Row class](#)

Rowset Class Properties

In this section, we discuss the Rowset class properties. The properties are discussed in alphabetical order.

ActiveRowCount property: Rowset class

Description

This property returns the number of active (non-deleted) rows in the rowset.

This property returns a value of 1 for an empty scroll (Flush always leaves an empty row.) You can use the `IsChanged` or `IsNew` properties to verify if the row is new.

This property is read-only.

Example

```
&tmp = &ROWSET.ActiveRowCount;
```

ChangeOnInit property: Rowset class

Description

Normally, if a field value is changed, whether through PeopleCode or by an end user, the `IsChanged` property for the row is set to `True`. The exception to this is when a change is done in the `FieldDefault` or `FieldFormula` event, that is, if a value is set in one of these events, the row is not marked as changed.

At save time, all newly inserted *and* changed rows are written to the database. All newly inserted but *not* changed rows are *not* written to the database.

Use this property to specify whether a change made to a new row from `RowInit` or `RowInsert` PeopleCode is marked as changed. This property takes a Boolean value. The default value is `True`.

Setting this property to `False` causes changes to fields for the rowset done in `RowInit` and `RowInsert` PeopleCode to *not* mark a new row as `IsChanged`.

This property is read/write.

Runtime Considerations

You must set this property *before* anything is changed for a row, otherwise the row is marked as changed.

This property propagates to child rowsets. That is, if it's set for a parent rowset before doing an insert row, it's automatically set on any and all child rowsets.

In addition, parent rows are marked as changed if this property is set only for the child rowset. That is, if you've changed a level three child of a level two row, the level two and level one rows are marked as changed to maintain data integrity.

DataAreaCollapsed property: Rowset class

Description

This property specifies whether the view of a data area is collapsed or expanded.

Note

You must set the `Collapsible Data Area` field on the properties for the level-based control for this property to have any effect.

This property changes to reflect the current state of the data area, according to whether the user has collapsed or expanded it. Changing the value collapses or expands the data area, but it does *not* prevent the user from collapsing (or expanding) it themselves.

Note

Because the user can change the value of this property, whatever value is set in PeopleCode isn't guaranteed to be still set the next time it is checked, because the user may have collapsed or expanded the data area in the meantime.

This property overwrites the value of the Default Initial View to Expanded field set in Application Designer. For example, if the **Collapsible Data Area** check box is selected and the **Default Initial View to Expanded State** check box is left unselected in Application Designer, then the control will be displayed as collapsed at runtime. If the `DataAreaCollapsed` property is set to false for this control before the page is displayed, then that will override the Application Designer setting and the control will be displayed as expanded.

This property takes a Boolean value: True, initially display the data area collapsed, False, initially display the data area expanded.

This property is read/write.

Note

To collapse just a group box, use the `DataAreaCollapsed` field method.

Example

The following example checks the number of rows in the level one rowset. If the number of rows returned is larger than 100, the data area is initially displayed collapsed.

```
If &Level1.RowCount > 100 Then
    &Level1.DataAreaCollapsed = True;
Else
    &Level1.DataAreaCollapsed = False;
End-If;
```

Related Topics

- [DataAreaCollapsed property: Field class](#)

DBRecordName property: Rowset class

Description

This property returns the name of the primary database record as a string for the rowset.

This property is read-only.

Example

```
&DBNAME = &ROWSET.DBRecordName;
```


DeleteEnabled property: Rowset class

Description

This property determines whether a rowset allows rows to be deleted (the equivalent of the user pressing **ALT+8** and **ENTER**). This property takes a Boolean value.

Note

This property controls only whether an end-user can delete a row. Rows can still be deleted using PeopleCode.

The initial value of this property depends on how the scroll was created at design time. If the No Row Delete setting is selected on the Use tab of the scroll properties dialog box, DeleteEnabled will be False; otherwise it will be True.

Note

If No Row Delete is selected in Application Designer, setting DeleteEnabled to True will *not* override this value. To control whether a rowset allows deletions at runtime, you should *not* select No Row Delete at design time.

For consistency, PeopleSoft recommends that either all rowsets at a level should disable deletions, or they should all allow deletions.

For rowsets created with non-Component Processor data (such as message rowsets, Application Engine rowsets, and so on) this property has no effect.

Note

Don't use this property with rowsets that are created using CreateRowset. Rowsets created using the CreateRowset function are standalone rowsets, not tied to the database, so there are no database updates when they are manipulated. Delete and insert activity on these types of rowsets aren't automatically applied at save time.

This property is read/write.

Related Topics

- [DeleteEnabled property: Rowset class](#)
- [InsertEnabled property: Rowset class](#)
- Application Designer Developer's Guide: Using Scroll Areas and Scroll Bars
- PeopleCode Developer's Guide: Using Standalone Rowsets

EffDt property: Rowset class

Description

This property references the effective date of the primary record associated with the rowset. If the primary record associated with the rowset is not effective-dated, this property has a null value. To find the primary record associated with a rowset object, you can use the DBRecordName property.

Note

This property isn't valid with rowsets created using the CreateRowset function.

This property is read-only.

Example

```
&tmp = &ROWSET.EffDt;
```

Related Topics

- PeopleCode Language Reference: CreateRowset function

EffSeq property: Rowset class

Description

This property references the effective-sequence number of the primary record associated with the rowset. If the primary record associated with the rowset does not have an effective-sequence number, this property has the value 0. To find the primary record associated with a rowset object, you can use the DBRecordName property.

Note

This property isn't valid with rowsets created using the CreateRowset function.

This property is read-only.

Example

```
&tmp = &ROWSET.EffSeq;
```

Related Topics

- PeopleCode Language Reference: CreateRowset function

InsertEnabled property: Rowset class

Description

This property determines whether a rowset allows rows to be inserted (the equivalent of the user pressing **ALT+7** and **ENTER**). This property takes a Boolean value.

Note

This property controls only whether an end-user can insert a row. Rows can still be inserted using PeopleCode.

The initial value of this property depends on a value set at design time. If the No Row Insert setting is selected on the Use tab of the scroll properties dialog box, InsertEnabled is False; otherwise it is True.

Note

If No Row Insert is selected in Application Designer, setting InsertEnabled to True does *not* override this value. To control whether a rowset allows inserts at runtime, you should *not* select No Row Insert at design time.

For consistency, PeopleSoft recommends that either all rowsets at a level should disable inserts, or they should all allow inserts.

For rowsets created with non-Component Processor data (such as message rowsets, Application Engine rowsets, and so on) this property has no effect.

Note

Don't use this property with rowsets created using CreateRowset. Rowsets created using the CreateRowset function are standalone rowsets, not tied to the database, so there are no database updates when they are manipulated. Delete and insert activity on these types of rowsets aren't automatically applied at save time.

This property is read/write.

Related Topics

- [DeleteEnabled property: Rowset class](#)
- Application Designer Developer's Guide: Using Scroll Areas and Scroll Bars
- PeopleCode Developer's Guide: Using Standalone Rowsets

IsEditError property: Rowset class

Description

This property is True if an error has been found on any field in any record in any row or child rowset of the current rowset after executing the ExecuteEdits method on either a message object or a record object. This property can be used with the Field Class properties EditError (to find the field that's in error), MessageSetNumber and MessageNumber to find the error message set number and error message number.

This property is read-only.

Example

The following is an example showing how IsEditError, along with ExecuteEdits could be used:

```
&REC.ExecuteEdits();
If &ROWSET.IsEditError Then
  For &I = 1 to &ROWSET.ActiveRowCount
    &ROW = &ROWSET(&I);
    For &J to &ROW.RecordCount
      &REC = &ROW.GetRecord(&J);
      For &K = 1 to &REC.FieldCount
        If &REC.GetField(&K).EditError Then
          LOG_ERROR();
          /* application specific call */
        End-If;
      End-For;
    End-For;
  End-For;
End-If;
```

Related Topics

- [ExecuteEdits method: Record class](#)
- [IsEditError property: Record class](#)
- [EditError property: Field class](#)
- [MessageNumber property: Field class](#)
- [MessageSetNumber property: Field class](#)

Level property: Rowset class

Description

This property returns the level, that is, the nesting depth, of the rowset object. The top-level rowset has a level number of 0.

This property is read-only.

Example

```
&tmp = &ROWSET.Level;
```

Name property: Rowset class

Description

This property refers to the name of the rowset. This property returns different values, based on the type of rowset.

Type of Rowset	Returns
Rowset created using GetLevel0	returns an empty string
Component buffer rowset	returns primary record name
Message rowset	returns primary record name
Component Interface rowset	returns primary record name
Application Engine rowset	always returns AESTATE

This property is read-only.

Example

```
&tmp = &ROWSET.Name;
```

ParentRow property: Rowset class

Description

This property returns a row object containing a reference to the parent row, that is, the row containing the rowset. If this is a top-level rowset (level zero), the ParentRow property has a null value.

This property is read-only.

Example

```
&tmp = &ROWSET.ParentRow.RowNumber;  
/* note that RowNumber is a property of the row class */
```

ParentRowset property: Rowset class

Description

This property returns a rowset object containing a reference to the parent rowset, that is, the rowset containing the rowset. If this is a top-level rowset (level zero), the ParentRowset property has a null value.

This property is read-only.

Example

```
&tmp = &ROWSET.ParentRowset.Level;  
/* note Level is another property of the rowset class */
```

RowCount property: Rowset class

Description

This property returns the total number of rows in the rowset. It includes deleted rows. (The `ActiveRowCount` property doesn't include deleted rows.)

This property is read-only.

Example

```
&tmp = &ROWSET.RowCount;
```

SetComponentChanged property: Rowset class

Description

This property determines whether any changes to the rowset using `PeopleCode` mark the component as changed. If `SetComponentChanged` is true, then changes made to the rowset using `PeopleCode` will be written to the database at runtime as long as the rowset is not based on a derived/work record.

This property takes a Boolean value: true, changes to the rowset mark the component as changed, false, the component is treated as if unchanged. The default is true.

If you set this property to false, this means that no row insert, row delete, field change on the rowset using `PeopleCode` would cause the system to treat the component data as changed.

The `SetComponentChanged` rowset class property overrides the `SetComponentChanged` field class property. If a field has `SetComponentChanged` set to true, but its associated rowset has `SetComponentChanged` set to false, any change to the field does not mark the component as changed.

This property is read/write.

Related Topics

- [SetComponentChanged property: Field class](#)

TopRowNumber property: Rowset class

Description

This property returns the row that is being displayed at the top of the scroll (if any) for the rowset.

Generally, this property is used to return the top row number of a scroll. However, sometimes you want to reposition the scroll. For example, if you use `SetCursorPos` to move the focus to a given field, there is no guarantee that the row containing the field is at the top of the scroll.

This property is read/write.

RowsetCache Class

Understanding a Rowset Cache

Many PeopleSoft applications use a metadata based design, where application PeopleCode reads metadata from a database record or some other source, then presents the user with an interface that is modified based on the metadata.

PeopleTools stores application data in a database cache to increase system performance. The RowsetCache class enables you to access this memory structure, created at runtime, and shared by all users.

Data that would qualify as metadata and would be appropriate for the RowsetCache class would be data that was commonly used yet fairly static, for example, country or currency tables.

The RowsetCache class does not provide a mechanism for synchronizing the data between database tables and the cache. If the underlying data changes, you must repopulate the rowset cache.

Note

Non-base language users may see different performance due to language table considerations.

Related Topics

- PeopleCode Developer's Guide: Setting MaxCacheMemory
- System and Server Administration: Cache Settings

Using the RowsetCache Class

The first time a user accesses a database, the rowset cache for that database is automatically created and populated. After that first user, all users and applications can take advantage of the rowset cache.

If the underlying data for a rowset cache changes, at the very least your application must delete the existing rowset cache. Your application can also delete, then recreate and repopulate the rowset cache if it changes the underlying data. For example:

```
Local Rowset &RS;  
Local RowsetCache &CRS;  
Local Boolean &RSLT = False;
```

```
Repeat  
  &I = &I + 1;  
  If &RS(&I).IsChanged Then
```

```
        &RSLT = True;  
    End-If;  
Until &RSLT or  
    &RS.RowCount = &I;  
  
If &RSLT Then  
    &CRS = GetRowsetCache(&RS);  
    &CRS.Delete();  
    &CRS = CreateRowsetCache(&RS);  
    &CRS.Save();  
End-if;
```

PeopleSoft recommends that any standard operations used by your application, such as deleting and repopulating the rowset cache, be encapsulated in an application class.

See [Understanding Application Classes](#).

The RowsetCache contains a rowset, and serializes the contained rowset to binary form for speed. As with most PeopleTools objects, RowsetCache objects are cached to memory and file, but they are also cached to the data base.

RowsetCache objects are intended to be local to a data base : they should not be transferred to another data base.

Error Handling

Every time you use the GetRowsetCache function, you should verify that the function executed successfully by testing for a null object. For example:

```
Local RowsetCache &RSC;  
  
&RSC = GetRowsetCache(Rowset.MyRowset);  
  
If (&RSC <> NULL) Then  
    /* do processing */  
Else  
    /* call to populate rowset cache */  
End-if;
```

Data Type of a RowsetCache Object

Cached rowset objects are declared as type RowsetCache. For example,

```
Local RowsetCache &Cache;
```

Scope of a RowsetCache Object

A RowsetCache object can only be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, Component Interface PeopleCode, and so on.

Note

PeopleSoft recommends that you do not specify RowsetCache objects as Global, due to their potential size.

RowsetCache Class Built-in Functions

PeopleCode Language Reference: CreateRowsetCache function

PeopleCode Language Reference: GetRowsetCache function

RowsetCache Class Methods

In this section, we discuss the RowsetCache class methods. These methods are discussed in alphabetical order.

Delete method: RowsetCache class

Syntax

Delete()

Description

Use the Delete method to delete the RowsetCache from memory. The RowsetCache must have already been created, either using the CreateRowsetCache and saving the RowsetCache, or by a user using the application.

If this method is called as part of a larger transaction, such as in the SavePreChange or SavePostChange event, the commit is tied to the commit of the outer transaction. If an error occurs in this method, the outer transaction will be rolled back.

If this method is invoked in a non-transactional PeopleCode event (such as RowInit) the commit is controlled by the regular Component Processor flow.

Parameters

None.

Returns

A Boolean value: True if the delete was successful, False if the specified RowsetCache wasn't found.

This method terminates with an error message if there was another problem.

Example

```
Local RowsetCache &CRS;  
Local Boolean &RSLT;  
  
&RSLT = GetRowsetCache(Rowset.MyRowset);
```

```
/* do processing*/  
  
If (&CRS <> NULL) Then  
    &RSLT = &CRS.Delete();  
End-If;
```

Related Topics

- PeopleCode Language Reference: CreateRowsetCache function
- PeopleCode Language Reference: GetRowsetCache function

Get method: RowsetCache class

Syntax

```
Get()
```

Description

Use the Get method to convert a RowsetCache object into a rowset object. After using this method, you can manipulate the data in the rowset like you would any other rowset, using the regular rowset methods and properties.

Parameters

None.

Returns

A rowset object populated with the cached rowset data.

Example

```
Local Rowset &RS;  
Local RowsetCache &CRS;  
  
&CRS = GetRowsetCache(Rowset.MyRowset);  
  
If (&CRS <> NULL) Then  
    &RS = &CRS.Get();  
Else  
    /* do error processing */  
End-if;
```

Related Topics

- PeopleCode Language Reference: GetRowsetCache function
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

Save method: RowsetCache class

Syntax

```
Save([[Rowset.]name] [, Description] [, Lang])
```

Description

Use the Save method to save a new or existing rowset to the cache. If a rowset of the specified name already exists, it will be replaced. Otherwise, the rowset will be added.

If this method is called as part of a larger transaction, such as in the SavePreChange or SavePostChange event, The commit is tied to the commit of the outer transaction. If an error occurs in this method, the outer transaction will be rolled back.

If this method is invoked in a non-transactional PeopleCode event (such as RowInit) the commit is controlled by the regular Component Processor flow.

Parameters

Parameter	Description
Rowset. <i>name</i>	Specify the name of the rowset to be saved to the cache. If you just specify <i>name</i> , you must enclose the name in quotation marks.
<i>Description</i>	Specify a text string describing the rowset.
<i>Lang</i>	Specify the language to use when saving the rowset. See the values below.

The values for the *Lang* parameter are:

Value	Description
%RowsetCache_SignonLang	Attempt to save the rowset to the cache using the sign-in language. However, if the base language rowset doesn't already exist in the cache, then the save to the sign-in language fails. This is because the system requires that base language data exist before related language data can be saved. If the <i>Lang</i> parameter is omitted, this is the default behavior.
%RowsetCache_BaseLang	Save the rowset to the cache using the base language.
%RowsetCache_SignonOrBaseLang	Attempt to save the rowset to the cache using the sign-in language. If that fails, then save the rowset using the base language.

Returns

A Boolean value: True if the save was successful, False otherwise.

Example

The following code caches &RS as a rowset definition.

```
Local RowsetCache &CRS;  
Local Rowset &RS;  
  
&CRS = GetRowsetCache(Rowset.MyRowset);  
  
If (&CRS <> Null) Then  
    &RS = &CRS.Get();  
    . . . /* do processing */  
Else  
    /* do error processing */  
End-if;  
  
&CRS.Save();
```

Related Topics

- PeopleCode Language Reference: GetRowsetCache function

RowsetCache Class Properties

In this section, we discuss the RowsetCache class properties. These properties are discussed in alphabetical order.

Content property: RowsetCache class

Description

Use this property to specify the contents of a RowsetCache object.

This property is read/write.

Example

The following code example verifies if the rowset cache is populated. If it isn't, the Else statement populates the rowset cache.

```
&Cache2 = GetRowsetCache("CACHE1");  
If &Cache2.Get() <> Null Then  
    WinMessage("Cache found");  
Else  
    &RS = CreateRowset(Record.PSLANGUAGES);  
    &NUM_READ = &RS.Fill();  
    &Cache2.Content = &RS;  
    &Cache2.Description = "test " | %Language_Data;  
    &RSLT = &Cache2.Save();  
End-If;
```

Description property: RowsetCache class

Description

This property can be used to set the description of the rowset cache as a string.

This property is read/write.

Security Authorization Classes

Understanding the Security Authorization Classes

The security authorization classes are used in conjunction with the PeopleTools security authorization service to authorize access to PeopleSoft objects (components or content references) or to authorize access to row-level data on local and remote PeopleSoft nodes.

Note

While the security authorization service can be used to provide basic authorization for PeopleSoft queries, pagelets, iScripts, components, or content references, the security authorization classes, and in a broader sense row-level security, are only applicable to components or content references, and not to PeopleSoft queries, pagelets, or iScripts.

Related Topics

- Security Administration: Understanding Using Web Services for Object and Row-Level Data Authorization

Importing the Security Authorization Classes

The security authorization classes are application classes (not a built-in class, like Rowset, Field, Record, and so on). Therefore, before you can use these classes in your implementation, you must import the security authorization classes into your program.

An import statement either names a particular application class or imports all the classes in a package.

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are not made available.

For the security authorization classes, use an import statement similar to the following to import all classes in the Security subpackage:

```
import PTCS_SECURITY:Security:*;
```

AuthRequest Class

This section provides an overview of the AuthRequest class and discusses:

- AuthRequest class methods.
- AuthRequest class properties.

An AuthRequest object represents the instantiation of an authorization request. An array of AuthRequest objects is instantiated when an authorization request message is processed by the PeopleTools security authorization service.

In this section, one method and two properties of the AuthRequest class are documented:

- GetParameterValue method
- Access property
- UserId property

In addition to these items, the AuthRequest class includes numerous read-only properties that are populated from the authorization request message if the corresponding parameter is specified in the message. You can also access the string value of these undocumented, read-only AuthRequest properties as needed:

- ComplItemName.
- Component.
- CrefId.
- KeyVal (access the value of a KeyVal array element with the GetParameterValue method).
- Market.
- Menu.
- Mode.
- Node.
- Portal.
- ServiceId.
- ServiceInstId.
- ServiceType.

This topic includes an example of an authorization request message and how that message could be evaluated by a custom security authorization handler.

See [Implementing a Security Authorization Handler](#).

Related Topics

- Security Administration: Developing the Security Authorization Service Application Class

AuthRequest Class Methods

In this section, the AuthRequest class methods are presented in alphabetical order.

GetParameterValue method: AuthRequest class

Syntax

```
GetParameterVa lue(name)
```

Description

Use this method to return the value of a key as a string.

Note

If the specified key name is undefined in the request message, this method returns a null string.

Parameters

Parameter	Description
<i>name</i>	Specifies the name of the key as a string.

Returns

A string representing the key value.

Example

```
&emplid = &arrAuthReq [&i].GetParameterValue("EMPLID");
```

AuthRequest Class Properties

In this section, the AuthRequest class properties are presented in alphabetical order.

Access property: AuthRequest class

Description

Use this property to set or return a string representing the authorization status for this request. "T" indicates that the request is authorized; "F" indicates that the request is not authorized. "F" is the default value.

This property is read/write.

Example

```
&arrAuthReq [&i].Access = "T";
```

UserId property: AuthRequest class

Description

Use this property to return the user ID of the user who invoked the authorization request as a string. This property is equivalent to the Username found in the SOAP message header.

This property is read-only.

Example

```
&userid = &arrAuthReq [&i].UserId;
```


SecurityHandler Class

This section provides an overview of the SecurityHandler class and discusses SecurityHandler class methods.

The SecurityHandler class is a generic interface class without a native implementation. Therefore, you must implement this interface by developing your own class to handle your specific authorization requirements.

SecurityHandler Class Methods

In this section, the SecurityHandler class methods are presented in alphabetical order.

GetAuthorization method: SecurityHandler class

Syntax

```
GetAuthorization(&AuthReq_array)
```

Description

Implement this method to access the information in the AuthRequest object and return whether the authorization request is authorized.

An AuthRequest object represents the instantiation of an authorization request. An array of AuthRequest objects is instantiated when an authorization request message is processed by the PeopleTools security authorization service.

This topic includes an example of an authorization request message and how that message could be evaluated by a custom security authorization handler.

See [Implementing a Security Authorization Handler](#).

Parameters

Parameter	Description
<i>&AuthReq_array</i>	Specifies an array of AuthRequest objects.

Returns

None.

Related Topics

- [AuthRequest Class](#)
This section provides an overview of the AuthRequest class and discusses:

Implementing a Security Authorization Handler

An AuthRequest object represents the instantiation of an authorization request. An array of AuthRequest objects is instantiated when an authorization request message is processed by the PeopleTools security authorization service.

An authorization request message has many standard elements such as, SERVICEID, SERVICE_TYPE, PORTAL, NODE, CREFID, and so on. In addition, an authorization request message will have one or more KEYVAL elements. Typically, you as the implementer of the GetAuthorization method should determine the structure of the corresponding authorization request message, and specifically, the number and type of KEYVAL elements. You will use the value of these KEYVAL elements along with other data in the authorization request to determine whether a specific request is authorized.

Example Scenario

In this example, employee details are available in Application A while employee performance and appraisal data resides in Application B. The user Rodrigo is the manager of a team. Rodrigo makes a request to view employee performance information for two employees: Callahan and Daniel. Rodrigo is Callahan's manager while Daniel is a higher level manager in a different part of the organization.

The PeopleTools security authorization service can be used to determine whether these requests are authorized.

Authorization Request Message

Application A will send the following authorization request as a SOAP message to Application B requesting that user Rodrigo be given access to the performance data for employees Callahan and Daniel. The authorization request message is contained between the <PARAMARRAY> </PARAMARRAY> delimiters.

```
<?xml version="1.0"?>
<soapenv:Envelope xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" =>
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://=>
schemas.xmlsoap.org/ws/2003/03/addressing/" xmlns:xsd="http://www.w3.org/2001/
=>
XMLSchema/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance/">
  <soapenv:Header xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
    <wsse:Security soap:mustUnderstand="1" xmlns:soap="http://
schemas.xmlsoap.org/
wsdl/soap/" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
wss->
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>RODRIGO</wsse:Username>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
    <FindAccess xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/=
PTCSSecurityReq.v1">

      <PARAMARRAY>
        <PARAMS>
          <SERVICEID>1</ SERVICEID >
          <SERVICE_TYPE>UPGE</SERVICE_TYPE>
          <NODE>APP_B_NODE</NODE>
          <MENU>PERFORMANCE_MENU</MENU>
          <COMPONENT>PERFORMANCE_DTL_COMP</COMPONENT>
          <MARKET>GBL</MARKET>
          <COMP_ITEM_NAME>PERFORMANCE_DTL</COMP_ITEM_NAME>
          <KEYVAL>EMPLID=CALLAHAN</KEYVAL>
```

```

    </PARAMS>

    <PARAMS>
      <SERVICEID>2</SERVICEID >
      <SERVICE_TYPE>UPGE</SERVICE_TYPE>
      <NODE>APP_B_NODE</NODE>
      <MENU>PERFORMANCE_MENU</MENU>
      <COMPONENT>PERFORMANCE_DTL_COMP</COMPONENT>
      <MARKET>GBL</MARKET>
      <COMP_ITEM_NAME>PERFORMANCE_DTL</COMP_ITEM_NAME>
      <KEYVAL>EMPLID=DANIEL</KEYVAL>
    </PARAMS>
  </PARAMARRAY>

  </FindAccess>
</soapenv:Body>
</soapenv:Envelope>

```

Example Security Handler

The PeopleTools security authorization service receives the message and first performs basic PeopleTools security authorization (user-role-permission list). If basic PeopleTools security authorization is valid for the requested object (a component, for example), the PeopleTools security authorization service will pass the request on to the security handler defined for this object. The PeopleTools security authorization service will encapsulate all the message elements such as user ID, node, component, and, key values into an AuthRequest object.

The following code provides an example security handler class that evaluates whether a user is authorized to see the performance details for a given employee ID. If the employee is a subordinate of the invoking user, then access granted; access is denied in all other instances such as a peer requesting performance data for a peer, an employee requesting access to his or her supervisor's performance data, or an employee requesting performance data from another department in the organization.

```

import PTCS_SECURITY:Security:*;

class SampleSecurityHandler extends PTCS_SECURITY:Security:SecurityHandler
  /*method AuthRequestHandler(&arrAuthReq As array of
  PTCS_SECURITY:Security:⇒
  AuthRequest);*/
  method GetAuthorization(&arrAuthReq As array of PTCS_SECURITY:Security:⇒
  AuthRequest);
  method isEmpSubordinate(&userid As string, &emplid As string) Returns
  boolean;
end-class;

/*method AuthRequestHandler*/
method GetAuthorization
  /* &arrAuthReq as Array of PTCS_SECURITY:Security:AuthRequest */
  /* Extends/implements
  PTCS_SECURITY:Security:SecurityHandler.GetAuthorization */
  Local string &emplid;
  Local string &userid;
  Local integer &i;
  For &i = 1 To &arrAuthReq.Len

```

```

        &emplid = &arrAuthReq [&i].GetParameterValue("EMPLID");
        &userid = &arrAuthReq [&i].UserId;
        /* If the employee ID to which access is requested is a subordinate of
the      */
        /* invoking user, grant access; otherwise, deny access for all other
requests. */
        If %This.isEmpSubordinate(&userid, &emplid) Then
            &arrAuthReq [&i].Access = "T";
        Else
            &arrAuthReq [&i].Access = "F";
        End-If;
    End-For;
end-method;
method isEmpSubordinate
    /* + &userid as String, +/
    /* + &emplid as String +/
    /* + Returns Boolean +/

    /* Use the organizational hierarchy to determine whether employee ID is
a      */
    /* subordinate of the invoking
user.      */
    /* The following example uses a simplified expression to make
this      */
    /* determination. In most organizations, this would not be a valid
test.      */
    If &userid > &emplid Then
        Return True
    Else
        Return False
    End-If;
end-method

```

Response Message

The preceding security handler class sets the Access property of the AuthRequest object to T when access is granted. It sets the Access property to F for requests that are not authorized. Then, the security handler class returns the AuthRequest object array to the PeopleTools security authorization service. The PeopleTools security authorization service returns a SOAP message similar to the following to the invoking application (Application A). The authorization request response is contained between the <PARAMARRAY> </PARAMARRAY> delimiters.

```

<?xml version="1.0"?>
<soapenv:Envelope xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/" =>
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://=>
schemas.xmlsoap.org/ws/2003/03/addressing/" xmlns:xsd="http://www.w3.org/2001/
=>
XMLSchema/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance/">
    <soapenv:Header xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
        <wsse:Security soap:mustUnderstand="1" xmlns:soap="http://
schemas.xmlsoap.org/
wsdl/soap/" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
wss->
wssecurity-secext-1.0.xsd">
        <wsse:UsernameToken>

```

```
<wsse:Username>RODRIGO</wsse:Username>
</wsse:UsernameToken>
</wsse:Security>
</soapenv:Header>
<soapenv:Body xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <FindAccess xmlns="http://xmlns.oracle.com/Enterprise/Tools/schemas/⇒
PTCSSecurityReq.v1">

    <PARAMARRAY>
      <PARAMS>
        <SERVICEID>1</SERVICEID>
        <ACCESS>T</ACCESS>
      </PARAMS>

      <PARAMS>
        <SERVICEID>2</SERVICEID>
        <ACCESS>F</ACCESS>
      </PARAMS>
    </PARAMARRAY>

  </FindAccess>
</soapenv:Body>
</soapenv:Envelope>
```

Related Topics

- Security Administration: Developing the Security Authorization Service Application Class
- Security Administration: Developing Request Messages for the Security Authorization Service
- Security Administration: Working with Response Messages for the Security Authorization Service

Session Class

Understanding Session Class

PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.

The PeopleSoft APIs are intended to be used, and are supported, in the following environments.

- PeopleSoft Windows client with either an existing two-tier connection or an existing connection to an application server.
- Application Engine batch program.
- Non-PeopleSoft program connecting to an application server.

The PeopleSoft APIs are exposed to the following language environments:

- PeopleCode
- OLE/COM
- C/C++
- Java

The APIs that are accessible using a session object are:

- Component Interface Classes
- PortalRegistry Classes
- Query Classes
- Search Class
- Tree Classes

Note

Tree Classes are accessible only through PeopleCode.

A session object controls the following:

- Security and access to the PeopleSoft system.
- Errors and error handling .
- Regional settings (that is, internationalization) for language, dates, times, and numbers.
- Tracing.

Related Topics

- [Understanding Component Interface Class](#)
Component Interfaces are the focal points for externalizing access to existing PeopleSoft components. They provide real-time synchronous access to the PeopleSoft business rules and data associated with a component outside the PeopleSoft online system. Component Interfaces can be viewed as "black boxes" that encapsulate PeopleSoft data and business processes, and hide the details of the structure and implementation of the underlying page and data.
- [Understanding the Portal Registry](#)
The portal registry is a tree structure in which content for a portal is organized, classified, and registered. The portal registry classes (API) are used to update the portal registry. The Portal Administration pages provide a GUI access to the portal registry API. You can also access them using a PeopleCode program you write yourself. How you access the portal registry depends on the type of updates required. Your organization will likely use both methods of updating the portal registry. This topic focuses on accessing the portal registry classes using PeopleCode.
- [Understanding Query Classes](#)
You create queries using PeopleSoft Query Manager to extract the data you need from the PeopleSoft database. You can use the query classes in PeopleCode to create a new query, or to modify or delete an existing query. You can also use methods in the Query class to execute the query and have the result set returned as either a rowset or have it format and write the result set to a file. You can also use the query classes to create a SQL statement to be used with the SQL object. In fact, the query classes expose all of the attributes and methods needed by the PeopleSoft Query Manager and Query Viewer applications.
- [Understanding Session Class](#)
PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.
- [Understanding Tree Classes](#)
Using the tree classes in your PeopleCode, you have access to all the functionality of PeopleSoft Tree Manager. Your application should instantiate the appropriate tree objects when it must work with the tree system database data, call the appropriate methods and properties, then close the objects when it is finished.

Security and Access to the PeopleSoft System

A session object controls security and access to the PeopleSoft system. You must "sign-on" to the PeopleSoft session with a valid user ID and password when you use the Connect method. In addition, there's an external authentication parameter that you can use with the connect.

Note

Additional authentication will be available after this release.

Error Handling

The session object handles error processing for all the APIs, such as Component Interfaces, the Query API, and so on. From the session object, you can check if there have been any errors.

Note

The exception to this is Subscription PeopleCode. All errors for Subscription PeopleCode get logged to the application message error table.

Error messages include system error messages or messages from the message catalog (a common set of error messages used by all PeopleSoft applications.) For a Component Interface, the session object level errors also contain any text errors that may have occurred from running ExecuteEdits.

On the session object, you can use the following properties to initially check for errors:

- `ErrorPending` indicates whether there are API errors
- `WarningPending` indicates whether there are API warnings

All errors are contained in the `PSMessages` collection. (The `PSMessages` property on a Session object returns this collection.)

Each item in this collection is a `PSMessage` object. A `PSMessage` object contains information about the specific error that has occurred, such as the explain text for the error, the message set number, and so on. (The type of information depends on the type of error.)

If the error was caused by a Component Interface, a contextual string is attached to the end of the `Text` property of the `PSMessage` object. This contextual string contains the exact location of the error, that is, which field in which data collection, on which row, caused the error. This string is also accessible (by itself) using the `Source` property.

When errors are loaded into the `PSMessages` collection depends on the type of error. System errors (that is, errors in the connection to the PeopleSoft Session) are logged as they occur. When an API error is logged depends on the API, as some APIs can be run in either interactive mode (meaning errors are logged as they happen) or in non-interactive mode (so errors are logged only when a particular method is run.)

If you are using Visual Basic or another COM environment, the PeopleSoft API system raises a COM exception the first time `ErrorPending` changes from `False` to `True`. It will *not* raise another exception until the `PSMessages` collection is cleared, which sets `ErrorPending` back to `False`.

Note

If you've called an API from an Application Engine program, all errors are also logged in the Application Engine error log tables.

Related Topics

- [Accessing a PSMessages Collection](#)
Use the `PSMessages` collection to return all of the messages that occur during the session. The following example finds all the messages listed in the `PSMessages` collections when the Component Interface Save methods fails. The example assumes that `&CI` is the Component Interface object reference.

Displaying Error Messages

Use the following PeopleCode to display messages from the PSMessages collection:

```
Local ApiObject &Session, &PSMessages;  
    &Session = %Session;  
    &PSMessages = &Session.PSMessages;  
    If (&Session <> Null ) Then  
        If &PSMessages.Count > 0 Then  
            For &i = 1 To &PSMessages.Count  
                &MsgSetNbr = &PSMessages.Item(&i).MessageSetNumber;  
                &MsgNbr = &PSMessages.Item(&i).MessageNumber;  
                MessageBox( 0 , " ", &MsgSetNbr, &MsgNbr, "Message not  
found");  
            End-For;  
            &PSMessages.DeleteAll();  
        End-If;  
    End-If;
```

Regional Settings

Regional settings enable the user to set the display of numbers, dates, times, and currencies to comply with usage in a specific locale. The session object exposes some of these values to the API through the RegionalSettings property. This property returns a regional settings object that has properties you can use to change these settings.

Related Topics

- [Regional Settings Class Properties](#)
This section describes the regional settings class properties. The properties are discussed in alphabetical order.

Trace Settings

The PeopleSoft debug pages enables you to control the environment in which your PeopleTools session is running. These pages include:

- Trace PeopleCode
- Trace SQL

These pages enable you to select the SQL trace options and the PeopleCode trace options that you want. The TraceSettings object (assessable from a session object) lets you control many of the same options during your session.

This example illustrates the fields and controls on the Trace PeopleCode page. You can find definitions for the fields and controls later on this page.

Trace PeopleCode

Select PeopleCode Trace options below; then select Save.

Options

☐ Trace Evaluator Instructions (1)	☐ Trace Internal Function Calls (256)
☐ List Evaluator Program (2)	☒ Show Parameter Values (512)
☒ Show Assignments to Variables (4)	☒ Show Return Parameter Values (1024)
☒ Show Fetched Values (8)	☒ Show Each (2048)
☐ Show Stack (16)	☐ Disable Value Truncation (524288)
☐ Trace Start of Programs (64)	
☐ Trace External Function Calls (128)	

Trace Value: 3596

Not every option on the debug pages is represented with a trace settings property.

Related Topics

- System and Server Administration: Using Debug Utilities
- System and Server Administration: Configuring PeopleCode Trace

Session Object Declaration

All session objects are declared as type `ApiObject`. For example,

```
Local ApiObject &MYSESSION;
Global ApiObject &PSMessage;
```

The following session objects can be declared as Global or Component:

- Session
- PSMessages Collection
- PSMessage

All other session objects *must* be declared as Local.

In this section, we discuss the following topics:

- State considerations.
- Considerations for declaring conditions.

State Considerations

In the PeopleSoft Pure Internet Architecture, all processing occurs on the server. If you do something in your PeopleCode program that causes a trip back to the user before the end of your PeopleCode program, the PeopleCode program *cannot* regain its state, that is, it can't reset local variables, and so on. This applies to all APIs that use the Session object.

If you must go back to the user before the end of your PeopleCode program, you must set all your objects to NULL before you go, or else you receive a runtime error.

For example, the following code causes an error:

```
&Session = %Session;  
Rem &Session = Null;  
WinMessage("Hello");
```

The following example does *not* cause an error:

```
&Session = %Session;  
&Session = Null;  
WinMessage("Hello");
```

Considerations for Declaring Collections

You *must* declare all collections for C/C++ and COM as objects, or else you receive errors at runtime.

For example if you're using RegionalSettings, include the following your declarations for a VB program:

```
Dim oRegionalSettings As Object
```

Then, use the following code to populate this variable:

```
Set oRegionalSettings = oCISession.RegionalSettings  
oRegionalSettings.LanguageCd = "GER"
```

Scope of a Session Object

A Session can be instantiated from PeopleCode, from a Visual Basic program, from C++, COM, and so on.

See the example section in Connect for more details.

This object can be used anywhere you have PeopleCode, that is, in Application Engine PeopleCode, record field PeopleCode, and so on.

Session Class Built-in Function

PeopleCode Language Reference: %Session system variable

PeopleCode Language Reference: GetSession function

Session Class Methods

In this section, we discuss the Session class methods. The methods are discussed in alphabetical order.

Connect method: Session class

Syntax

```
(version, {"EXISTING" | //PSoftApplicationServer:JoltPort}, UserID, Password, ExtAuth)
```

Description

The Connect method connects a session object to a PeopleSoft application server.

Note

This function remains for backward compatibility only. Use the %Session system variable to return a reference of a session object instead.

If you already have a PeopleSoft session running (you are already connected to a PeopleSoft application server and are running a component, and so on) you must specify EXISTING, and not the `//PSoftApplicationServer:JoltPort`. Typically, use the parameter value of EXISTING from PeopleCode, not from other language environments.

If you are using an existing connection to the application server, you *cannot* specify a different user ID or password. If you don't specify these values as NULL string, you must specify the exact same user ID (and password) as the one that originally started the session.

Parameters

Parameter	Description
<i>version</i>	Specify the API version that the client is expecting. Future releases will use this parameter. For now, you must use a 1.
EXISTING <code>//PSoftApplicationServer:JoltPort</code>	Specify EXISTING if you're currently connected to an application server. Otherwise, specify the named application server machine and the IP port to connect to on an application server machine.
<i>UserID</i>	Specify the PeopleSoft user ID to use for the connection. This must be a valid user ID. If you are using an existing connection, you can specify a NULL string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>Password</i>	Specify the password associated with the user ID to use for the connection. This must match the password assigned for this user ID <i>exactly</i> . If you are using an existing connection, you can specify a NULL string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Parameter	Description
<i>ExtAuth</i>	This parameter is required, but it is unused in this release. You must enter a 0 for this parameter.

Returns

A Boolean value: True if the connection completed successfully, False otherwise.

Example

The following is an example of the code you would use if there is an existing connection to the application server:

```
Local ApiObject &MYSESSION;  
  
&MYSESSION = GetSession();  
&MYSESSION.Connect(1, "EXISTING", "", "", 0);
```

The following is an example connecting to a PeopleSoft system using a Visual Basic program. It first checks for error messages. If there are any errors, the text of the error is displayed to the user.

On Error GoTo eMessage

```
Dim oSession As Object  
Dim oPSMessage As Object  
Dim oBC As Object  
Set oSession = CreateObject("PeopleSoft.Session")  
  
oSession.Connect 1, "//PSSOFT0061998:7000", "PTDM0", "PTDM0", 0  
  
&lsquo;Application Specific Processing
```

eMessage:

```
If (oSession.PSMessages.Count > 0) Then  
    For i = 1 To oSession.PSMessages.Count  
        Set oPSMessage = oSession.PSMessages.Item(i)  
        MsgBox (oPSMessage.Text)  
    Next i  
End If
```

Related Topics

- PeopleCode Language Reference: %Session system variable

Disconnect method: Session class

Syntax

```
Disconnect()
```

Description

The Disconnect method disconnects the session associated with the session object executing the method from that PeopleSoft session.

This method returns a Boolean value: True if successfully disconnected, False otherwise.

API Instantiation Methods

The following is a list of the other methods used with the session object to instantiate an API object such as a Component Interface, a tree structure, and so on.

Component Interface:

- FindComplntfcs(*ComponentName*): returns a collection of component interfaces based on the partial Component Interface name.
- GetComplntfc(*COMPINTFC.ComponentName*): returns a Component Interface object.
- ValidateComplntfc(*ComponentInterfaceName*): indicates the success or failure of component interface validations.

Portal Registry:

- FindPortalRegistries(*partial_name*): returns a collection of PortalRegistry objects.
- GetLocalNode(): returns a node object.
- GetNodes(): returns a collection of node objects.
- GetPortalRegistry(): returns a PortalRegistry object.
- GetRemoteNodes(): returns a collection of node objects.
- GetActualRemoteNodes(): returns a collection of remote node objects only.

Query:

- FindQueryDBRecords(): returns a reference to a QueryDBRecord collection, filled with zero or more records.
- FindQueries(): returns a reference to a Query collection, filled with zero or more queries.
- FindQueriesDateRange(*StartDateString*, *EndDateString*): returns a reference to a Query collection, filled with zero or more queries that match the specified date range.
- GetQuery(): returns a query object.
- GetQuerySecurityProfile(): a QuerySecurityProfile object.
- SearchQueryDBRecord(*SearchType*, *Pattern*, *CaseSensitive*): returns a QueryDBRecord collection.
- SearchPrivateQueries(*QueryType*, *SearchType*, *Pattern*, *CaseSensitive*): a query collection.
- SearchPublicQueries(*QueryType*, *SearchType*, *Pattern*, *CaseSensitive*): a query collection.

Search:

- GetSearchIndexes(): returns a SearchIndexes collection.
- GetSearchQuery(): returns a search query object.

Tree:

- GetTree(): returns a tree object.

- `GetTreeStructure()`: returns a tree structure object.

Session Class Properties

This section describes the Session class properties. The properties are discussed in alphabetical order.

ErrorPending property: Session class

Description

This property indicates whether there are any error messages pending for the API that is currently running. After this property has been set, it returns True until the PSMessages collection is cleared (or deleted.)

This property is read-only.

Example

```
If &MYSESSION.ErrorPending Then
    &COUNT = &MYSESSION.PSMessages.Count;
    For &I = 1 To &COUNT
        &ERROR = &MYSESSION.PSMessages.Item(&I);
        &TEXT = &ERROR.Text;
        WinMessage("Error text " | &TEXT);
    End-For;

&MYSESSION.PSMessages.DeleteAll();
```

PSMessages property: Session class

Description

This property returns a reference to a PSMessages collection object. If there are no messages, this property returns an object reference to PSMessages with a count of zero.

This property is read-only.

Example

```
If &SESSION.PSMessages.Count > NULL Then
    /* there are messages do processing */
End-if;
```

Related Topics

- [PSMessages Collection Methods](#)
This section describes the PSMessages collection methods. The methods are discussed in alphabetical order.

PSMessagesMode property: Session class

Description

This property is used to determine how messages are output. This property takes either a numeric value or a constant. The default value is 1 (%PSMessages_CollectionOnly).

You must set this property before you check the type of message, that is, you can't check the type of message, then decide how it's displayed.

This property sets the value for the session. You can change modes during a session, such as, if you're starting a Component Interface. However, after you run the Component Interface, you should set the value back. For example:

```
&OldMode = &Session.PSMessagesMode;  
&Session.PSMessagesMode = 1;  
...  
&Session.PSMessagesMode = &OldMode;
```

You can specify either a numeric value or a constant. The values are:

Numeric Value	Constant Value	Description
0	%PSMessages_None	None.
1	%PSMessages_CollectionOnly	PSMessage Collection only (default).
2	%PSMessages_MessageBoxOnly	Message box only.
3	%PSMessages_Both	Both collection and message box.

Note

If you set this property to 0 (%PSMessages_None), *all* messages are ignored. Use this option with caution.

This property is read/write.

Example

```
Local ApiObject &SESSION;  
  
&SESSION = %Session;  
&MMODE = &SESSION.PSMessagesMode;  
&SESSION.PSMessagesMode = %PSMessages_MessageBoxOnly;
```


RegionalSettings property: Session class

Description

This property returns a reference to a RegionalSettings collection object.

This property is read-only.

Related Topics

- [Regional Settings Class Properties](#)
This section describes the regional settings class properties. The properties are discussed in alphabetical order.

Repository property: Session class

Description

This property returns a reference to a Repository object.

Related Topics

- [Understanding the PeopleSoft API Repository](#)
This section provides an overview of the PeopleSoft API Repository and discusses how to access the repository.

SuspendFormatting property: Session class

Description

This property turns off the PeopleSoft automatic formatting when coercing a string into a field. Formatting is typically necessary for external Component Interface users (such as for a Visual Basic program,) yet should be suspended for a PeopleCode program. You should not typically need to set this value yourself, as it's set appropriately based on where the session object is created.

This property takes a Boolean value: True means formatting is suspended, False means it isn't suspended. If you start your session from a PeopleCode program, the default for this property is True. If you don't start the session from a PeopleCode program, the default is False.

This property is read/write.

TraceSettings property: Session class

Description

This property returns a reference to a TraceSettings collection object.

This property is read-only.

Related Topics

- [Trace Setting Class Properties](#)
Each of the following properties relates to the debug pages in PeopleTools.

WarningPending property: Session class

Description

This property indicates whether there are any warning messages pending for the API that is currently running.

This property is read-only.

Accessing a PSMessages Collection

Use the PSMessages collection to return all of the messages that occur during the session. The following example finds all the messages listed in the PSMessages collections when the Component Interface Save methods fails. The example assumes that &CI is the Component Interface object reference.

```
If Not &CI.Save() Then
    /* save didn't complete */
    &COLL = &MYSESSION.PSMessages;
    For &I = 1 to &COLL.Count
        &ERROR = &COLL.Item(&I);
        &TEXT = &ERROR.Text;

        /* do message processing */

    End-For;
    &COLL.DeleteAll(); /* Delete all messages in queue */
End-if;
```

As you evaluate each message, delete it from the PSMessages collection. Or, delete all the messages in the queue at once using DeleteAll.

If there are multiple errors when saving a Component Interface, all errors are logged to the PSMessages collection, not just the first occurrence of an error.

Considerations for Declaring Collections

You *must* declare all collections for C/C++ and COM as objects, or else you receive errors at runtime.

PSMessages Collection Methods

This section describes the PSMessages collection methods. The methods are discussed in alphabetical order.

DeleteAll method: PSMessages collection

Syntax

```
DeleteAll()
```

Description

The DeleteAll method deletes all the PSMessage objects in the PSMessages collection executing the method. You should use this property after you have processed all the errors in the collection. This method also resets the status of ErrorPending to False.

Returns

This method returns a Boolean value: True if all PSMessages in the collection were successfully deleted, False otherwise.

Related Topics

- [ErrorPending property: Session class](#)

DeleteItem method: PSMessages collection

Syntax

```
DeleteItem(number)
```

Description

The DeleteItem method deletes the PSMessage object that exists at the *number* position in the PSMessages collection executing the method.

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the PSMessage object that you want to delete. All other items within the collection are renumbered.

Returns

This method returns a Boolean value: True if the PSMessage object was successfully deleted, False otherwise.

Example

```
&ERROR.DeleteItem(&I);
```

First method: PSMessages collection

Syntax

```
First()
```

Description

The First method returns the first PSMessage object in the PSMessages collection object executing the method.

Example

```
&ERROR = &PSMESSAGE.First();
```

Item method: PSMessages collection

Syntax

```
Item(number)
```

Description

The Item method returns a PSMMessage object that exists at the *number* position in the PSMessages collection executing the method

Parameters

Parameter	Description
<i>number</i>	Specify the position number in the collection of the PSMMessage object that you want returned.

Returns

A reference to a PSMMessage object, NULL otherwise.

Example

```
&PSMSGCOL = &SESSION.PSMessages;  
For &I = 1 to &PSMSGCOL.Count;  
    &PSMESSAGE = &PSMSGCOL.Item(&I);  
    /* do error processing */  
End-For;
```

Next method: PSMessages collection

Syntax

```
Next()
```

Description

The Next method returns the next PSMMessage object in the PSMessages collection object executing the method. You can use this method only after you have used either the First or Item methods: otherwise the system doesn't know where to start.

PSMessages Collection Property

This section describes the PSMessages collection property.

Count property: PSMessages collection

Description

This property returns the number of PSMessage objects in the PSMessages collection object. This property is read-only.

Example

```
&COUNT = &PSMESSAGE.Count;
```

PSMessage Class Properties

This section describes the PSMessages class properties. The properties are discussed in alphabetical order.

ExplainText property: PSMessage class

Description

This property returns the explanation text (as a string) for the error message associated with the PSMessage object. You can use this property in conjunction with the MessageNumber property (which contains the error message number) and the MessageSetNumber property (which contains the error message set number.)

Note

ExplainText should be accessed only when necessary because it requires a second database read or application server round trip.

This property is read-only.

MessageNumber property: PSMessage class

Description

This property returns the error message number (as a number) for the error message associated with the PSMessage object. You can use this property in conjunction with the MessageSetNumber property (which contains the error message set number) and the ExplainText property (which contains text explaining the error.)

This property is read-only.

MessageSetNumber property: PSMessage class

Description

This property returns the error message set number (as a number) for the error message associated with the PSMessage object. You can use this property in conjunction with the

MessageNumber property (which contains the error message number) and the ExplainText property (which contains text explaining the error.)

This property is read-only.

MessageType property: PSMessage class

Description

This property indicates the type of the message, whether it's from the message catalog, if it's a warning, error, or information error.

This property returns a numeric value. The values are:

Value	Description
0	Message is not a message catalog entry or there is no message.
1	Message has a severity of Error.
2	Message has a severity of Warning.
3	Message has a severity of Information.

This property is read-only.


Source property: PSMessage class

Description

This property returns a string indicating the actual field that's in error. The syntax of the string that's returned is as follows:

```
ComponentInterfaceName.[CollectionName(Row).[CollectionName(Row).  
[CollectionName⇒  
(Row)]]].PropertyName
```

The following image is an example of Sample Component Interface. The string here is also returned as part of the Text property. For example, suppose you had a Component Interface named EMPL_CHKLIST_CI.

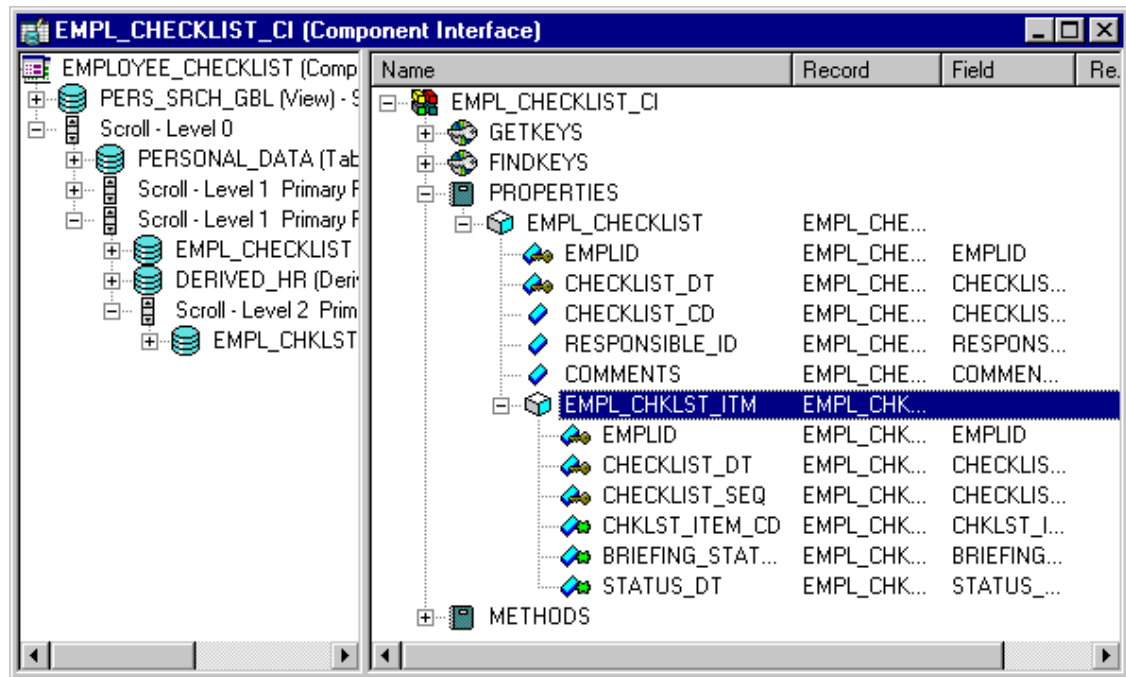

The following indicates that the first level field, EMPLID, has the error:

EMPL_CHKLIST_CI.EMPLID

The Component Interface EMPL_CHKLIST_BC has a data collection (scroll) called EMPL_CHKLIST_ITM. Suppose that it has 3 rows, and the STATUS_DT field was in error. The Source property would return the following string:

EMPL_CHKLIST_CI.EMPL_CHKLIST_ITM(3).STATUS_DT

You can use the Source property in conjunction with the MessageNumber property (which contains the error message number), the MessageSetNumber property (which contains the error message set number), the ExplainText property (which contains text explaining the error), and the Text property (which contains the text of the message.)

This property is read-only.

Example

The following example code finds the error messages and displays them to the user. It finds the field that caused the error and displays that also.

```
Local ApiObject &PSMESSAGE;
Local Boolean &FIND;
Local string &SOURCE, &FIELD, &TEXT;
Local number &START, &LEN, &NSTART, &FLEN;
.
.
.
For &I = 1 to &SESSION.PSMessages.Count;
    &PSMESSAGE = &SESSION.PSMessages.Item(&I);
    /* only display errors, not warnings, to user */
```

```

If &PSMESSAGE.Type = 1 Then
    &TEXT = &PSMESSAGE.Text;
    /* find name of field in error */
    &SOURCE = &PSMESSAGE.Source;
    &LEN = Len(&SOURCE);
    /* find last dot before field */
    &FIND = False;
    &START = Find(".", &SOURCE);
    While Not (&FIND)
        &NSTART = Find(".", &SOURCE, &START + 1);
        If &NSTART = 0 Then
            &FIND = True;
        Else
            &START = &NSTART;
        End-If;
    End-While;
    &FLEN = &LEN - &START;
    &FIELD = Substring(&SOURCE, &START + 1, &FLEN);
    /* display text and field to user */
    Winmessage("You received the following error: " | &TEXT | "For field
" | =>
    &FIELD);
    End-If;
End-For;

```

Text property: PSMessage class

Description

This property returns the text of the message (as a string) for the error message associated with the PSMessage object. It also includes a contextual string that contains the name of the field that generated the error. The contextual string has the following syntax:

```

{ComponentInterfaceName.[CollectionName(Row).[CollectionName(Row).
[CollectionName=>
(Row)]]].PropertyName}

```

The contextual string (by itself) is available using the Source property of the PSMessage.

You can use the Text property in conjunction with the MessageNumber property (which contains the error message number), the MessageSetNumber property (which contains the error message set number), and the ExplainText property (which contains text explaining the error.)

This property is read-only.

Example

```

Local ApiObject &MYSESSION, &COL, &ERROR;
Local string &TEXT;
.
.
.
If &MYSESSION.ErrorPending Then
    /* received error */

```



```
&COLL = &MYSESSION.PSMessages;  
For &I = 1 to &COLL.Count  
    &ERROR = &COLL.Item(&I);  
    &TEXT = &ERROR.Text;  
    /* do error processing */  
End-For;  
End-if;
```

Related Topics

- [Source property: PSMMessage class](#)

Regional Settings Class Properties

This section describes the regional settings class properties. The properties are discussed in alphabetical order.

ClientTimeZone property: Regional Settings class

Description

This property specifies the client time zone. This property takes a string value.

This property is read/write.

CurrencyFormat property: Regional Settings class

Description

This property specifies how currency values are displayed. This property takes a number value. The default value is 1.

In the following values, @ represents the character specified with the CurrencySymbol property.

Value	Description
0	@1.1
1	1.1@
2	@.1.1
3	1.1.@

This property is read/write.

CurrencySymbol property: Regional Settings class

Description

This property specifies the currency symbol. This property takes a string value. The default value is "\$".

This property is read/write.

DateFormat property: Regional Settings class

Description

This property specifies the date format defaults. PeopleTools supports the Short Date Format specification (MDY, DMY, or YMD), and the Date separator setting. When you add a Date field in a record definition, you indicate whether you want to display the century. PeopleTools Date and DateTime fields always show leading zeros for month, day, and year.

This property takes a number value. The values for this property are:

Value	Description
0	MDY (default)
1	DMY
2	YMD
3	Default value on system

This property is read/write.

DateSeparator property: Regional Settings class

Description

This property specifies the character used to separate the month, day, year in the date. This property takes a string value. The default value is "/".

This property is read/write.

DecimalSymbol property: Regional Settings class

Description

This property specifies the character used to separate the fractional of the number from the whole. This property takes a string value. The default value for this property is ".".

Note

If you change the value of this property to a comma (,), you should adjust the DigitGroupingSymbol to a different character or some applications may not operate correctly.

This property is read/write.

DigitGroupingSymbol property: Regional Settings class

Description

This property specifies the character used as a thousand or other grouping separator. This property takes a string value. The default value for this property is ",".

This property is read/write.

LanguageCd property: Regional Settings class

Description

This property specifies the language to be used for the transaction. This property takes a string value. The default value for this property is the user's base language.

This property is read/write.

Note

If you change this value dynamically using PeopleCode, this value will *not* change back to the original value when you disconnect. You must manually set it back to the original value.

Example

The following example sets the language code, then at the end of the program, sets it back to the original value.

```
Local ApiObject &SESSION;
Local ApiObject &CI;
/** Get Session ApiObject **/
&SESSION = %Session;

/** Get Message ApiObject **/
&MSG = %IntBroker.GetMessage();
&RS = &MSG.GetRowset();

/** Get Component Interface **/
&CI = &SESSION.GetCompIntfc(compIntfc.NAMES_CI);

&REG_LNG = &SESSION.RegionalSettings.LanguageCd;

For &TRANS_NUM = 1 To &RS.RowCount

    /** Store Language Code in Temp Var **/
    &LNG = &RS(&TRANS_NUM).PSCAMA.LANGUAGE_CD.Value;

    /** Set the Language for this Transaction **/
    If &LNG <> &REG_LNG Then
        &SESSION.RegionalSettings.LanguageCd = &LNG;
    End-If;
    /** application specific processing */

    &SESSION.RegionalSettings.LanguageCd = &REG_LNG;
    &SESSION.Disconnect();
End-For
```

UseLocalTime property: Regional Settings class

Description

This property specifies whether the local time zone of the client should be used to format time fields. This property takes a Boolean value. The default value is True.

This property is read/write.

1159Separator property: Regional Settings class

Description

This property specifies the morning designator. This property takes a string value up to five characters. The default value is AM.

Use the 2359Separator property to specify the afternoon designator.

This property is read/write.

Considerations Using the 1159Separator Property

You cannot use this property as you would other properties. You must use the ObjectGetProperty function for accessing the property. For example:

```
Local ApiObject &SESSION;  
Local ApiObject &reg;  
  
/** Get Session ApiObject **/  
&SESSION = %Session;  
&reg = &SESSION.RegionalSettings;  
  
&REG_LNG = &SESSION.RegionalSettings.LanguageCd;  
&MornDesignation = ObjectGetProperty(&reg, "1159Separator");
```

Related Topics

- PeopleCode Language Reference: ObjectGetProperty function
- [2359Separator property: Regional Settings class](#)

2359Separator property: Regional Settings class

Description

This property specifies the afternoon designator. This property takes a string value up to five characters. The default value is PM.

Use the 1159Separator property to specify the morning designator.

This property is read/write.

Considerations Using the 2359Separator Property

You cannot use this property as you would other properties. You must use the `ObjectGetProperty` function for accessing the property. For example:

```
Local ApiObject &SESSION;  
Local ApiObject &reg;  
  
/** Get Session ApiObject **/  
&SESSION = %Session;  
&reg = &SESSION.RegionalSettings;  
  
&REG_LNG = &SESSION.RegionalSettings.LanguageCd;  
&AfternoonDesignation = ObjectGetProperty(&reg, "2359Separator");
```

Related Topics

- PeopleCode Language Reference: `ObjectGetProperty` function
- [1159Separator property: Regional Settings class](#)

Trace Setting Class Properties

Each of the following properties relates to the debug pages in PeopleTools.

This section describes the trace setting class properties. The properties are discussed in alphabetical order.

Related Topics

- System and Server Administration: Using Debug Utilities

API property: TraceSetting class

Description

This property is part of the PeopleSoft API trace and sets the **API Information** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

COBOLStmtTimings property: TraceSetting class

Description

This property is part of the SQL trace and sets the **COBOL Statement Timings** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

ConnDisRollbackCommit property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Connect, disconnect, rollback, and commit** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

DBSpecificCalls property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Database API-specific Calls** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

ManagerInfo property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Manager Information** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

NetworkServices property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Network Services** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

NonSSBs property: TraceSetting class

Description

This property is part of the SQL trace and sets the **All Other API Calls besides SSBs** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

OutputUNICODE property: TraceSetting class

Description

This property specifies if the trace file is written in ANSI or UNICODE (for example, **Output Unicode Trace File**).

This property takes a Boolean value: True means the file will be written in UNICODE, False means it will be ANSI.

This property is read/write.

PCExtFcnCalls property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Trace External Function Calls** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCFcnReturnValues property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Show Function Return Value** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCFetchedValues property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Show Fetched Values** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCIntFcnCalls property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Trace Internal Function Calls** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCListProgram property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **List the Program** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCParameterValues property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Show Parameter Values** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCProgramStatements property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Trace Each Statement** in Program value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCStack property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Show Stack** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCStartOfPrograms property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Trace Start of Programs** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCTraceProgram property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Trace Evaluator Instructions** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

PCVariableAssignments property: TraceSetting class

Description

This property is part of the PeopleCode trace and sets the **Show Assignments to Variables** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

RowFetch property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Row Fetch** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

SQLStatement property: TraceSetting class

Description

This property is part of the SQL trace and sets the **SQL Statement** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

SQLStatementVariables property: TraceSetting class

Description

This property is part of the SQL trace and sets the **SQL Statement Variables** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

SSBs property: TraceSetting class

Description

This property is part of the SQL trace and sets the **Set Select Buffers** value.

This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

SybBindInfo property: TraceSetting class

Description

Note

This property has been desupported, and remains for backward compatibility only.

This property is part of the SQL trace and sets the **Sybase Bind Information** value. This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

SybFetchInfo property: TraceSetting class

Description

Note

This property has been desupported, and remains for backward compatibility only.

This property is part of the SQL trace and sets the **Sybase Fetch Information** value. This property takes a Boolean value: True means the trace will be run, False means it won't.

This property is read/write.

TraceFile property: TraceSetting class

Description

This property specifies the location of the trace file (that is, **PeopleTools Trace File** value.)

This property takes a string value.


This property is read/write.

SOAPDoc Class

Understanding the SOAPDoc Class

The Simple Object Access Protocol (SOAP) is a lightweight protocol for defining synchronous messages in a distributed Web environment. It's an XML based protocol that can be used in combination with other protocols such as HTTP using URLs as endpoints for a message. SOAP is an application of XML and XML namespaces and optionally uses XML Schemas.

SOAP is an industry standard, defined by the World Wide Web Consortium (W3C), that defines an XML grammar for identifying a method name and the method parameters and for returning the results. More specific information about SOAP can be found in the W3C specification on SOAP. The SOAP serialization rules can also be found in the complete specifications and aren't outlined in this topic. Also included in the W3C specification are sections on using SOAP with HTTP, which is also outside the domain of this topic. You can also send and receive HTTP messages through the Integration Gateway.

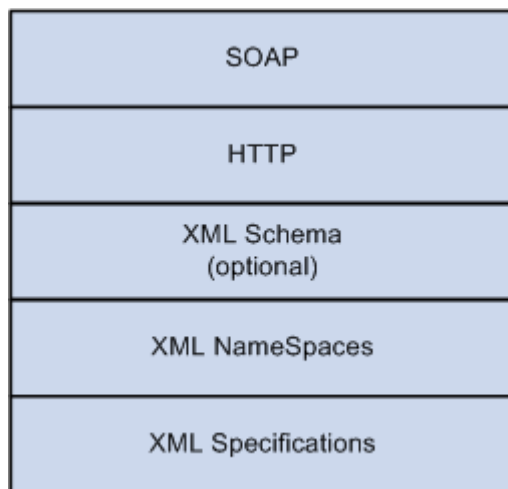

Related Topics

- [Integration Broker: Understanding Sending and Receiving Messages](#)

SOAP Message Exchange Model

SOAP messages are always synchronous. They can implement Request/Response synchronous messages with the response having the output parameters returned in another SOAP document to the sender.

SOAP supports HTTP-POST and HTTP-GET formats. PeopleSoft supports only HTTP, using the Integration Gateway.

Processing the message requires validation of the mandatory sections of the SOAP XML document and understanding SOAP namespaces.


SOAP Message Document

A SOAP Message is an ordinary XML document that consists of the following parts:

- A mandatory SOAP envelope.
- An optional SOAP header.
- A mandatory SOAP body.

SOAP Message Part	Description
SOAP Envelope	Is the top element of the XML document representing the message. It defines the content of the message, as well as the framework of what is in a message, how to process it, who should deal with it and whether it is optional or mandatory.
SOAP Header	Contains header information, and attributes that can be set to encode and further identify the type of processing as well as additional features of the message. This portion is optional.
SOAP Body	Contains the call and response information intended for the recipient of the message. A SOAP Fault element can appear in the body of the SOAP message to carry error or status information.

The following image illustrates SOAP parts in an XML document.

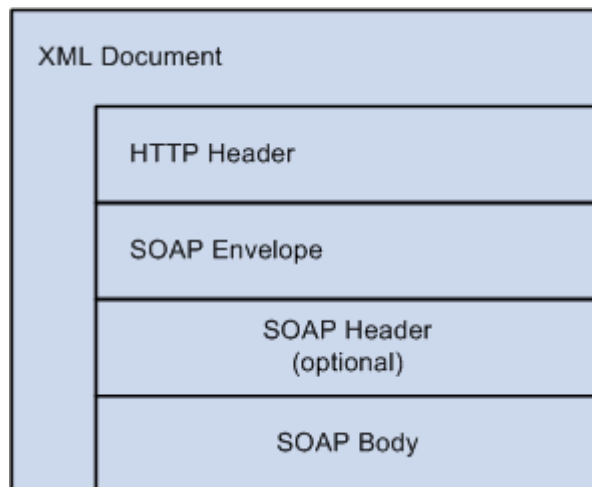

The following are *required* for a SOAP message:

- Encoded using XML.
- Have a SOAP envelope.
- Have a SOAP body.
- Use the SOAP encoding and envelope namespaces.

The following are optional for a SOAP message:

- SOAP Header.
- XML Schema use.

The following are *invalid* for a SOAP message:

- DTD references.
- XML Processing Instructions.
- XML CData Sections.

The SOAPDoc Class

The SOAPDoc class is a separate class in PeopleCode that works similarly to the XmlDocument and XmlNode classes. Many of the same methods and properties that work with an XmlDocument or XmlNode object also work with a SOAPDoc object. However, there are also methods and properties that don't apply to a SOAPDoc object.

The following XmlDocument and XmlNode methods do *not* apply to a SOAPDoc object:

- AddCDataSection
- AddProcessInstruction
- CopyToPSFTMessage
- CreateDocumentType
- InsertCDataSection
- InsertProcessInstruction
- LoadIBContent

If a Merchant Profile has been created it can be used with the SOAPDoc class and the Message class. You can use the XmlDocument property to convert the message object to an SOAPDoc object, then use the SOAPDoc methods and properties, as well as the XmlDocument methods and properties that are applicable.

You can only use the message object when the XmlDocument object is structured.

It should be noted that a SOAPDoc object is really an extension of the XmlDocument class. You have the option of getting portions of the SOAPDoc—like the body node—and accessing it or manipulating it as if it were a standard element in an XML document, because in actuality it is.

SOAPDoc Object Creation

There are a few steps to creating a SOAPDoc. The following is an overview of these steps. More detail about the methods and properties mentioned in this section can be found in the reference section of this topic.

SOAP Header Section

Because the SOAP header is optional, the header is not validated when you use the ValidateSOAPDoc method.

A SOAP header must be added *before* any other parts of the SOAPdoc.

Use the AddHeader method to add a header to a SOAPDoc.

Use the `HeaderNode` property to access an existing SOAPDoc header.

After you have a reference to the header, you can use `XmlDoc` methods to read the contents of the header (like any node.)

Related Topics

- [AddHeader method: SOAPDoc class](#)
- [HeaderNode property: SOAPDoc class](#)

SOAP Envelope Section

A SOAP envelope is a required portion of the XML Message and is generated automatically using the SOAP schema as specified by SOAP W3C.

A SOAP envelope must be added *before* you add a SOAP body or a SOAP method. This is an optional method. You need to use this method only if you need to set any additional attributes for the Envelope section. The default SOAP schemas are added automatically.

To set additional custom attributes or schemas on the Envelope element, use the `AddEnvelope` method. This method adds the envelope element tags and the default schemas for either SOAP or UDDI depending on the value of the parameter passed in. The default encoding styles are also set here. Only one envelope section can be set within one PeopleSoft SOAP `XmlDoc`.

The SOAPDoc adds only a default URL to the envelope. For some UDDI sites, you may need to add a specific schema yourself. To do this, generate the envelope with no schema, then access the envelope section and add the specific schema URL using the `AddAttribute` method.

Related Topics

- [AddEnvelope method: SOAPDoc class](#)

SOAP Body Section

The body is the `XmlDoc` where the method is defined. The method `AddBody` starts the body section of the XML SOAPDoc and must be in the `XmlDoc` before adding in method sections of the message. Only one body section can be set within one SOAPDoc. This is an optional method and must be called only if you need to set any additional attributes for the body section. Otherwise the body section is automatically generated in the `XmlDoc`.

The SOAP body must be added *after* you add the SOAP envelope, and *before* you add any methods.

Related Topics

- [AddBody method: SOAPDoc class](#)

SOAP Method Section

The `AddMethod` method adds the name of the method element being processed. Additional attributes for this method can be set using the `AddAttribute XmlNode` method.

You don't have to specifically add a SOAP body section. The body is automatically added when you call the `AddMethod` method.

The `AddParm` method sets the parameters for the parameter element of the method as a name, value pair. Multiple parameters can be set and are used in the order that this method is called. If an XML Schema is defined, types can be used using the `AddAttribute XmlNode`

method. Any number of parameter name-value pairs can be added for a method and are added to the XmlDocument in the order that the AddParm methods are called.

You can add parameters to a method only *after* you add the method. The parameters are added in the order you add them in the PeopleCode program.

Related Topics

- [AddMethod method: SOAPDoc class](#)
- [AddParm method: SOAPDoc class](#)
- [AddAttribute method: XmlNode class](#)

SOAPDoc Section Access

Use the following properties to access the different parts of a SOAPDoc object. All of these properties return an XmlNode object.

- BodyNode
- EnvelopeNode
- MethodNode

After you have access to the portion of the SOAPDoc that you want, use the XmlNode properties and methods to manipulate the SOAPDoc.

Use the XmlDocument property to convert a SOAPDoc object to an XmlDocument object, and vice-versa.

The MethodName property returns the name of the method in the SOAPDoc object.

Note

If you use the MethodName property, you receive only the method name, as a string, not a reference to an XmlNode object that represents the method.

Use the GetParmName and GetParmValue methods to get the name and the values in a SOAPDoc object for each output parameter. You must use the index number of the parameter you want with these methods. You can determine the total number of parameters with the ParmCount property.

Related Topics

- [BodyNode property: SOAPDoc class](#)
- [EnvelopeNode property: SOAPDoc class](#)
- [MethodName property: SOAPDoc class](#)
- [MethodNode property: SOAPDoc class](#)
- [GetParmValue method: SOAPDoc class](#)

PeopleCode to Create a SOAPDoc

The following is the order in which the Soap methods *must* be called in order to create a valid SOAPDoc.

```
&SOAPDoc = CreateSOAPDoc(); /* required */
&SOAPDoc.AddEnvelope(0); /* optional */
&SOAPDoc.AddBody(); /* optional */
&SOAPDoc.AddMethod("GetQuote", 1); /* required */
&SOAPDoc.AddParm("symbols", "PSFT");
&SOAPDoc.AddParm("format", "l1c1d1t1");
&OK = &SOAPDoc.ValidateSOAPDoc(); /* optional */
```

SOAPDoc Fault Section

In the body of a SOAP XML response document, you can define a fault section. Generally this is used if in an inbound message has been processed and some sort of error occurred. The text of the message gives further information about the error.

Use the AddFault method to add a fault code and a fault string to the body of a SOAPDoc. Only one fault section can be set within one SOAP XML document.

If you receive a response message that contains a fault, use the FaultCode and FaultString methods to return these values.

Related Topics

- [AddFault method: SOAPDoc class](#)
- [FaultCode property: SOAPDoc class](#)
- [FaultString property: SOAPDoc class](#)

The ValidateSOAPDoc Method

Use the ValidateSOAPDoc method to validate the SOAP document for correctness as follows:

- Encoded using XML.
- Has SOAP envelope.
- Has SOAP Body.
- Has a SOAP Method.
- Used SOAP encoding and envelope namespaces.

Related Topics

- [ValidateSOAPDoc method: SOAPDoc class](#)

SOAPDoc Objects and Messages

To publish the data of a SOAPDoc, you must first transform the SOAPDoc into an XmlDocument object by using the XmlDocument property. After you do this, you can use the XmlDocument object with the SyncRequestXmlDoc, PublishXmlDoc, or GetXmlDoc functions, to publish the data either synchronously or asynchronously.

All XmlDocument messages must be associated with a message definition. An XmlDocument message must be associated with an *unstructured* message, that is, a message definition that's created without any record definitions.

Use the SOAPDoc class if all of the following are true:

- Your third-party source or target node requires SOAP-compliant messages.
- Your third-party source or target node requires synchronous transactions.
- Your message conforms to the SOAP specification.

Related Topics

- [Understanding XmlDocument Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDocument class is used to create and manipulate XML data.
- Integration Broker: Understanding Sending and Receiving Messages

Data Type of a SOAPDoc Object

SOAPDoc objects are declared as type SOAPDoc. For example,

```
Local SOAPDoc &MyDoc;
```

```
Global SOAPDoc &SOAPDoc;
```

Scope of a SOAPDoc Object

A SOAPDoc object can only be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

Note

Do not extend a SOAPDoc with an application class. This is currently not supported.

SOAPDoc Built-In Functions

PeopleCode Language Reference: CreateSOAPDoc function

SOAPDoc Class Methods

In addition to the methods listed here, most of the XmlDocument and XmlNode class methods can be used with a SOAPDoc object. The methods are discussed in alphabetical order.

Related Topics

- [Understanding XmlDoc Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDoc class is used to create and manipulate XML data.

AddBody method: SOAPDoc class

Syntax

AddBody()

Description

Use the AddBody method to add the body section of the SOAP XML document.

This method is optional when you're creating a SOAP document. Use it only if you must set any additional attributes for the body. Otherwise, the body section is automatically generated in the XML document.

If you're going to add a body section, you must do it *after* you've added the envelope section. If you are going to modify the body section, you must do this *before* you add the method sections of the SOAP XML document by calling the BodyNode property and using XmlNode methods and properties.

Note

Only one body section can be set within one PeopleSoft SOAP XML document.

Parameters

None.

Returns

None.

Example

From the following code:

```
&MyDoc.AddBody( );
```

the following XML is created:

```
<SOAP-ENV:Body >
```

```
</SOAP-ENV:Body>
```

Related Topics

- [AddMethod method: SOAPDoc class](#)
- [AddEnvelope method: SOAPDoc class](#)

- [AddAttribute method: XmlNode class](#)

AddEnvelope method: SOAPDoc class

Syntax

AddEnvelope(*SOAP_Schema*)

Description

Use the AddEnvelope method to add the envelope element tags and the default schema. The default encoding styles are also set with this method.

 Note

Only one envelope section can be set within one PeopleSoft SOAP XML document.

If you're going to be adding an envelope section, you must do this *before* you add the body section or any methods by calling the EnvelopeNode property and using XmlNode methods and properties.

Parameters

Parameter		Description
SOAP_Schema		Specify whether to use the default SOAP schema or the UDDI schema. You can specify either a numeric value or a constant for this property. The values are:
Numeric Value	Constant Value	Description
0	%SOAP_Schema	Use the SOAP schema (1.1 format). Specifying this value adds the following attributes to the SOAP envelope: xmlns:SOAP-ENV= "http://schemas.xmlsoap.org/soap/envelope/" xmlns:SOAP-ENV= "http://schemas.xmlsoap.org/soap/encoding/"
1	%SOAP_UDDI	Use the UDDI schema. Specifying this value adds the following attribute to the SOAP envelope: xmlns:SOAP-ENV= "urn:uddi-org:api"

Numeric Value	Constant Value	Description
2	%SOAP_Custom	Specify this value to add custom Namespace schemas to the SOAP envelope instead of the default SOAP schemas. Note: You must create the custom schema before you use it. See XML Schema . You must add the SOAP_ENV URI (as an attribute, using AddAttribute) before adding any other SOAP attributes. Note: For highly customized SOAP documents, PeopleSoft recommends using the XmlDoc class and creating the tags yourself.
3		Use the SOAP schema (1.2 format).

Returns

None.

Example

The following example uses the default SOAP schema (1.1 format). The following PeopleCode program:

```
&MyDoc.AddEnvelope(%SOAP_Schema);
```

Creates the following XML:

```
<?xml version="1.0"?>

<SOAP-ENV:Envelope xmlns:SOAP-ENV= "http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENV= "http://schemas.xmlsoap.org/soap/encoding/">

</SOAP-ENV:Envelope>
```

The following example creates an envelope and validates it.

The following PeopleCode program:

```
&soapReq = CreateSOAPDoc(); /* required */
/* manually add SOAP XML envelope, header, body, method and parameters */
/* &soapReq.AddHeader(); MUST come before any other section, but is optional
*/
&soapReq.AddEnvelope(%SOAP_Custom);
&EnvNode = &soapReq.EnvelopeNode;
&AddEnvelopeAttribute = &EnvNode.AddAttribute("xmlns:SOAP-ENV", "urn:MyCustom⇒
Schema.org");
&AddEnvelopeAttribute = &EnvNode.AddAttribute("xmlns:xsi", http://www.w3.org/
2001⇒
/XMLSchema-instance);
&AddEnvelopeAttribute = &EnvNode.AddAttribute("xmlns:xsd", http://www.w3.org/
2001⇒
/XMLSchema);
&AddEnvelopeAttribute = &EnvNode.AddAttribute("xmlns:soap", http:⇒
//schemas.xmlsoap.org/soap/envelope/);
&soapReq.AddMethod("requestAccessCode", 1);
```

```

/* Validate the message */
MessageBox(%MsgStyle_OK, "", 0, 0, "Validate the message");
&OK = &soapReq.ValidateSOAPDoc();
MessageBox(%MsgStyle_OK, "", 0, 0, "Message Validated and &OK = " | &OK);

/* Convert SOAP XML to XML */
MessageBox(%MsgStyle_OK, "", 0, 0, "Sending the message next");

&string = &soapReq.GenXmlString();
MessageBox(%MsgStyle_OK, "", 0, 0, "SOAP XML = " | &string);

```

Creates the following XML:

```

<?xml version="1.0"?>
<SOAP-ENV:Envelope xmlns:xsd= "http://www.w3.org/2001/XMLSchema"
xmlns:xsi= "http://www.w3.org/2001/XMLSchema-instance"
xmlns:soap= "http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENV= "urn:MyCustomSchema.org">
<SOAP-ENV:Body>
    <requestAccessCode/>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

The following example uses the default SOAP schema (1.2 format).

The following PeopleCode program:

Local Soapdoc &sdoc;

```

&sdoc = CreateSOAPDoc("");
&sdoc.AddEnvelope(3);
&sdoc.AddHeader();
&sdoc.AddBody();
&sdoc.AddMethod("SOAPXml", 1);
&sdoc.AddParm("symbols", "ORCL");
&sdoc.AddParm("team", "PTQA");

```

Creates the following XML. Generate XML through &sdoc.GenFormattedXmlString():

```

<?xml version="1.0"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENC="http://www.w3.org/2003/05/soap-encoding/"
xmlns:SOAP-ENV="http://www.w3.org/2003/05/soap-envelope/">
    <SOAP-ENV:Header/>
    <SOAP-ENV:Body>
        <SOAPXml>
            <symbols>ORCL</symbols>
            <team>PTQA</team>
        </SOAPXml>
    </SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

Related Topics

- [AddBody method: SOAPDoc class](#)

AddFault method: SOAPDoc class

Syntax

AddFault(*Fault_Code*, *Fault_String*, *Fault_Format*)

Description

Use the AddFault method to add a fault code, its corresponding fault string, and the fault format (optional), to a SOAPDoc. Use this method only in a Response SOAP XML Document. The Envelope and Body sections of the XML Document are automatically added if they don't exist.

Parameters

Parameter	Description
<i>Fault_Code</i>	Specify the fault code to add, as a string.
<i>Fault_String</i>	Specify the fault string to add, as a string.
<i>Fault_Format</i>	Specify whether the SOAP schema 1.2 format should be used, as a Boolean value. It is an optional parameter.

The following fault codes are supported:

Fault Code	Fault String	Description
100	Version Mismatch	The XML version or SOAP version is not supported by the current implementation.
300	Client error	An error occurred on the client while processing the SOAP document.
400	Server error	An error occurred on the server while processing the SOAP document.

Returns

None.

Example

The following example program:

```
&SOAPDoc = CreateSOAPDoc();
&SOAPDoc.AddFault("400", "Server Error");
/* ==> The following statement executes this instance: */
&FaultCode = &SOAPDoc.FaultCode;
&FaultString = &SOAPDoc.FaultString;
&OK = &SOAPDoc.ValidateSOAPDoc();
```

Creates the following XML:

```
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
=>
SOAP-ENV:encodingStyle="http://schemas.xmlsoap.org/soap/encoding/"
- <SOAP-ENV:Body>
- <SOAP-ENV:Fault>
  <faultcode>400</faultcode>
  <faultstring>SOAP Server Error</faultstring>
</SOAP-ENV:Fault>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

In the following example, SOAP schema 1.2 format is used.

The following PeopleCode program:

```
Local Soapdoc &SOAPDoc1;

&SOAPDoc1 = CreateSOAPDoc();
&SOAPDoc1.AddFault("400", "Server Error", True);
```

Creates the following XML.

```
<?xml version="1.0"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENC="http://www.w3.org/2003/05/soap-encoding"
xmlns:SOAP-ENV="http://www.w3.org/2003/05/soap-envelope/"
  <SOAP-ENV:Body>
    <SOAP-ENV:Fault>
      <SOAP-ENV:Code>400</SOAP-ENV:Code>
      <SOAP-ENV:Reason>Server Error</SOAP-ENV:Reason>
    </SOAP-ENV:Fault>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

Related Topics

- [FaultCode property: SOAPDoc class](#)
- [FaultString property: SOAPDoc class](#)
- [FaultCodeS property: SOAPDoc class](#)

AddHeader method: SOAPDoc class

Syntax

```
AddHeader()
```

Description

Use the AddHeader method to add the header section of the SOAP XML document.

This method is optional when you're creating a SOAP document. Use it only if you want to include a header in your SOAP XML document.

If you're going to add a header, you must do it *before* you've added any other sections, such as the envelope or the body.

After you've created the header, you can access it using the `HeaderNode` property. Once you have a reference to the node, you must use the `XmlDoc` methods to add specifics to the header section such as encryption, as well as any required child nodes.

Note

Only one header section can be set within one PeopleSoft SOAP XML document.

Parameters

None.

Returns

None.

Example

The following test adds a header section into a SOAP XML document where all sections are created explicitly:

```
Local SOAPDoc &Sdoc;
Local XMLNode &Node;

/* ==> Add inputs: */
&Sdoc = CreateSOAPDoc(); /* required */
&Sdoc.AddEnvelope(0); /* optional */
&Sdoc.AddHeader(); /* optional */
&Sdoc.AddBody(); /* optional */
&Sdoc.AddMethod("SOAPXml", 1); /* required */
&Sdoc.AddParm("symbols", "PSFT");

&OK = &Sdoc.ValidateSOAPDoc();

/*Append to TEMP file*/
&Xstring = &Sdoc.GenXmlString();
&myfile = GetFile("cmsDoc.xml", "A", "UTF8");
&myfile.WriteLine(&Xstring);
&myfile.Close();

&METHOD = &Sdoc.MethodName;
&ParmCnt = &Sdoc.ParmCount;
&HdrNode= &Sdoc.HeaderNode;

&HdrName = &HdrNode.NodeName; //returns SOAP-ENV:Header

/* Echo out the Returned Outputs */
out_BI_results("SOAP Header test 1");
out_BI_results(" ");
out_BI_results("Validated: " | &OK);
out_BI_results("Method: " | &METHOD);
out_BI_results("Parm Count: " | &ParmCount);
```



```
out_BI_results("Header : " | &HdrName);  
  
out_BI_results("End-of-Test");
```

Related Topics

- [HeaderNode property: SOAPDoc class](#)

AddMethod method: SOAPDoc class

Syntax

```
AddMethod(MethodName, IsRequest)
```

Description

Use the AddMethod method to set the name of the method element being processed. Additional attributes for the added method can be set using the AddAttribute and InsertAttribute method. Executing AddMethod automatically adds any missing Envelope and Body sections.

Note

Only one method can be set within one PeopleSoft SOAP XML document.

The SOAPDoc method can be used only *after* the envelope and body sections have been added.

Set the parameters for the method using the AddParm method.

Parameters

Parameter	Description
<i>MethodName</i>	Specify the name of the method element being added.
<i>IsRequest</i>	Specify if the message is a request message. This parameter takes a numeric value: • 1 if the message is a request message • 0 if the message is a response message

Returns

None.

Example

The following sample program:

```
&MyDoc.AddMethod("GetPrice", 0);
```

Creates the following XML:

```
<GetPrice>

</GetPriceResponse>
```

The following sample program:

```
&MyDoc.AddMethod("GetPrice", 1);
```

Creates the following XML:

```
<GetPrice>

</GetPrice>
```

Related Topics

- [AddParm method: SOAPDoc class](#)
- [MethodName property: SOAPDoc class](#)
- [MethodNode property: SOAPDoc class](#)
- [AddAttribute method: XmlNode class](#)

AddParm method: SOAPDoc class

Syntax

```
AddParm(ParmName, ParmValue)
```

Description

Use the AddParm method to set the parameters for the parameter element of the current method. To set more than one parameter, use the method more than once. The parameters are set and used in the order that this method is called. Any number of parameter name-value pairs can be set for a method and are added to the XML document in the order that this method is called from the PeopleCode program.

Parameters

Parameter	Description
<i>ParmName</i>	Specify the name of the parameter as a string.
<i>ParmValue</i>	Specify the value of the parameter as a string.

Returns

None.

Example

The following PeopleCode:

```
&MyDoc.AddParm("Item", "Apples");
```

Creates the following XML:

```
<Item >Apples</Item>
```

Related Topics

- [AddMethod method: SOAPDoc class](#)

GetParmName method: SOAPDoc class

Syntax

```
GetParmName(Index)
```

Description

Use the GetParmName method access the parameter names for a method.

Parameters

Parameter	Description
<i>Index</i>	Specify the number of the parameter that you want to access. Values start at 1.

Returns

A string.

Example

```
For &I = 1 to &SOAPDoc.ParmCount  
  
    &ParmName = &SOAPDoc.GetParmName(&I);  
    &ParmValue = &SOAPDoc.GetParmValue(&I);  
  
    /* Do processing */  
  
End-For;
```

Related Topics

- [GetParmValue method: SOAPDoc class](#)
- [ParmCount property: SOAPDoc class](#)

GetParmValue method: SOAPDoc class

Syntax

```
GetParmValue(Index)
```

Description

Use the GetParmValue method to access the parameter values for a method.

Parameters

Parameter	Description
<i>Index</i>	Specify the number of the parameter you want to access. Values start at 1.

Returns

A string.

Example

```
For &I = 1 to &SOAPDoc.ParmCount

    &ParmName = &SOAPDoc.GetParmName(&I);
    &ParmValue = &SOAPDoc.GetParmValue(&I);

    /* Do processing */

End-For;
```

Related Topics

- [GetParmName method: SOAPDoc class](#)
- [ParmCount property: SOAPDoc class](#)

ValidateSOAPDoc method: SOAPDoc class

Syntax

```
ValidateSOAPDoc()
```

Description

Use the ValidateSOAPDoc method to validate the SOAP document for correctness as follows:

SOAP message is:

- Encoded using XML.
- Has SOAP envelope.
- Has SOAP body.

- Used SOAP encoding and envelope namespaces.

Returns

This method returns either a number or a constant. The values are:

Numeric Value	Constant Value	Description
0	%SOAP_Valid	The SOAPDoc is valid.
1	%SOAP_NoEnvelope	Missing or invalid envelope section in XML document.
2	%SOAP_InvalidEnvelope	Envelope has improper Namespace used. Should be: SOAP-ENV or SOAP-ENC
3	%SOAP_NoBody	Missing body section in XML document.
4	%SOAP_NoMethod	Missing or invalid method section in XML document.
6	%SOAP_InvalidXml	Invalid XML syntax in SOAPDoc.

Example

```
&Return = &MyDoc.ValidateSOAPDoc();  
If &Return <> 0 Then  
    /* do error processing */  
End-if;
```

Related Topics

- [FaultCode property: SOAPDoc class](#)
- [FaultString property: SOAPDoc class](#)

SOAPDoc Class Properties

In addition to the properties listed here, most of the XmlDocument and XmlNode class properties can be used with a SOAPDoc object. The properties are discussed in alphabetical order.

Related Topics

- [Understanding XmlDocument Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDocument class is used to create and manipulate XML data.

BodyNode property: SOAPDoc class

Description

This property returns a reference to the body section of a SOAPDoc, as an XmlNode.

This property is read-only.

Related Topics

- [Understanding XmlDocument Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDocument class is used to create and manipulate XML data.

EnvelopeNode property: SOAPDoc class

Description

This property returns a reference to the envelope section of a SOAPDoc, as an XmlNode.

This property is read-only.

Related Topics

- [Understanding XmlDocument Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDocument class is used to create and manipulate XML data.

FaultCode property: SOAPDoc class

Description

Use the FaultCode property to return the fault code if the SOAP message has one. Not every message has a fault code. It is returned only when the SOAP method has had an error in processing *and* the SOAP method supports fault codes. This property returns a number.

If the fault code in the message cannot be converted to a number, the value 0 is returned. Use FaultCodeS to get the fault code value as a string.

This property is read-only.

Example

```
Local SOAPDoc &MyDoc;  
Local integer &Fault;  
  
&MyDoc = CreateSOAPDoc();  
&MyDoc.AddFault("400", "Server Error");  
  
&Fault = &MyDoc.FaultCode;
```

Related Topics

- [FaultString property: SOAPDoc class](#)
- [FaultCodeS property: SOAPDoc class](#)
- [AddFault method: SOAPDoc class](#)

FaultCodeS property: SOAPDoc class

Description

Use the FaultCodeS property to return the fault code if the SOAP message has one. Not every message has a fault code. It is returned only when the SOAP method has had an error in processing *and* the SOAP method supports fault codes. This property returns a string.

This property is read-only.

Example

```
Local SOAPDoc &MyDoc;  
Local string &Fault;  
  
&MyDoc = CreateSOAPDoc();  
&MyDoc.AddFault("400", "Server Error");  
  
&Fault = &MyDoc.FaultCodeS;
```

Related Topics

- [AddFault method: SOAPDoc class](#)
- [FaultCode property: SOAPDoc class](#)
- [FaultString property: SOAPDoc class](#)

FaultString property: SOAPDoc class

Description

Use the FaultString property to return the fault string if the reply has one. Not every SOAP message has a fault string. It is only returned when the SOAP method has had an error in processing *and* the SOAP method supports fault strings.

Example

```
&Fault = &MyDoc.FaultString;
```

Related Topics

- [FaultCode property: SOAPDoc class](#)
- [FaultCodeS property: SOAPDoc class](#)
- [AddFault method: SOAPDoc class](#)

HeaderNode property: SOAPDoc class

Description

Use the HeaderNode property to return a reference to the header node. After you have a reference, you can use the XmlDocument methods to read and make changes to the node.

This property is read/write.

Example

The following test adds a header section, validates the SOAPDoc, then access the header.

```
Local SOAPDoc &Sdoc;
Local XMLNode &Node;

/* ==> Add inputs: */
&Sdoc = CreateSOAPDoc(); /* required */

&Sdoc.AddHeader(); /* optional */
&Sdoc.AddMethod("SOAPXml", 1); /* required */

&OK = &Sdoc.ValidateSOAPDoc();

/*Append to TEMP file*/
&Xstring = &Sdoc.GenXmlString();
&myfile = GetFile("cmsDoc.xml", "A", "UTF8");
&myfile.WriteLine(&Xstring);
&myfile.Close();

&METHOD = &Sdoc.MethodName;
&ParmCnt = &Sdoc.ParmCount;
&HdrNode= &Sdoc.HeaderNode; //returns SOAP-ENV:Header

&HdrName = &HdrNode.NodeName;

/* Echo out the Returned Outputs */
out_BI_results("SOAP Header test 1");
out_BI_results(" ");
out_BI_results("Validated: " | &OK);
out_BI_results("Method: " | &METHOD);
out_BI_results("Parm Count: " | &ParmCount);
out_BI_results("Header : " | &HdrName);

out_BI_results("End-of-Test");
```

Related Topics

- [AddHeader method: SOAPDoc class](#)

MethodName property: SOAPDoc class

Description

This property returns the name of the method of the SOAPDoc, as a string.

If you want a reference to the method that you can work with, as an XmlNode, use the MethodNode property.

This property is read-only.

MethodNode property: SOAPDoc class

Description

This property returns a reference to the method section of a SOAPDoc, as an XmlNode.

If you want only the name of the method returned, use the MethodName property.

This property is read-only.

Related Topics

- [Understanding XmlDoc Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDoc class is used to create and manipulate XML data.

ParmCount property: SOAPDoc class

Description

This property returns the total number of parameters for the method section in a SOAP XML document as a number.

This property is read-only.

Example

```
For &I = 1 to &SOAPDoc.ParmCount
    &ParmName = &SOAPDoc.GetParmName(&I);
    &ParmValue = &SOAPDoc.GetParmValue(&I);
    /* do processing */
End-For;
```

XmlDoc property: SOAPDoc class

Description

This property transforms a SOAPDoc object to an XmlDoc object. This is necessary only when sending or receiving a response message. You do *not* need to do this conversion to use the XmlDoc or XmlNode methods and properties.

This property is read/write.

Example

The following is an example of sending a SOAP message and receiving the response:

```
Local XmlDoc &request, &response;
Local string &strXml;
Local SOAPDoc &soapReq, &soapRes;

/* create the SOAP XML Document */
&soapReq = CreateSOAPDoc();
&soapReq.AddMethod("GetPrice");
```

```
&soapReq.AddParm("Item", "Apples");

/* convert SOAP to XmlDocument */
&request = &soapReq.XmlDoc;

/* Send the Request */
&response = SyncRequestXmlDoc(&request, Message.QE_SOAP_REQ, Node.UNDERDOG);

/* Get the SOAP response from the XmlDocument response */
&soapRes = CreateSOAPDoc();
&soapRes.XmlDoc = &response;
&OK = &soapRes.ValidateSOAPDoc();
&strXml = &soapRes.GenXmlString();
```

SOAPDoc Class Examples

The following are typical example of how you would use a SOAPDoc object.

Creating a SOAP Document

The following is the minimal PeopleCode you need to create a SOAP XML document:

```
Local SOAPDoc &SOAPDoc;

&SOAPDoc = CreateSOAPDoc();
&SOAPDoc.AddMethod("GetPrice");
&SOAPDoc.AddParm("Item", "Apples");
```

The following is an example of creating a SOAP XML document with a simple method.

```
Local SOAPDoc &SOAPDoc;

&SOAPDoc = CreateSOAPDoc();

&SOAPDoc.AddEnvelope(0);
&SOAPDoc.AddBody();
&SOAPDoc.AddParm("symbols", "PSFT");
&SOAPDoc.AddParm("format", "l1c1d1t1");

&OK = &SOAPDoc.ValidateSOAPDoc();
```

Reading an Existing SOAP Document

The following code loads a SOAP XML document from a URL, then finds the method name and parameters to call that method.

```
Local SOAPDoc &SOAPDoc;
Local Number &ParmCount;
Local Boolean &Result;

&SOAPDoc = CreateSOAPDoc();
&SOAPDoc.ParseXmlFromURL("C:\ptdvl\840S2\files\inputSOAP.xml");
```

```
&ParmCount = &SOAPDoc.ParmCount;  
For &I = 1 to &ParmCount  
  
    &ParmName = &SOAPDoc.GetParmName(&I);  
    &ParmValue = &SOAPDoc.GetParmValue(&I);  
  
/* Do processing */  
End-for;
```

Using SOAP XML Text

The following shows a SOAP XML Document text for the following pseudo-code:

```
Item = "Apples"  
Price = GetPrice(Item);
```

Example of SOAP Request Header

Here's the HTTP Header for a SOAP message. This Host URL is the server where the method defined in the SOAP envelope is processed:

```
POST /GetPrice HTTP/1.1  
Host: www.farmersmarket.com  
Content-Type: text/xml; charset="utf-8"  
Content-Length: nnnn  
SOAPAction:"GetPrice"
```

This is a simple example of a SOAP XML Document, requesting the price of Apples. It uses the default SOAP schemas. The name of the method is GetPrice with the parameter Item which has a value of "Apples".

```
<SOAP-ENV:Envelope  
  xmlns:SOAP-ENV="http://schemas.SOAP.org/soap/envelope/"  
  xmlns:SOAP-ENC="http://schemas.SOAP.org/soap/encoding/"  
>  
  <SOAP-ENV:Body>  
    <m:GetPrice xmlns:m="SomeURI">  
      <Item>Apples</Item>  
    </m:GetPrice>  
  </SOAP-ENV:Body>  
</SOAP-ENV:Envelope>
```

Example of SOAP HTML Reply Header

Here's the HTTP Header for a SOAP message Reply with a 200 return code that the message was processed OK.

```
HTTP/1.1 200 OK  
Content-Type: text/xml; charset="utf-8"  
Content-Length: nnnn
```

This simple example of a SOAP XML Document reply returns the price of Apples as 34. The SOAP reply always codes the name of the requested method with the Response tag attached to it, GetPriceResponse in this case.

```
<SOAP-ENV:Envelope
  xmlns:SOAP-ENV="http://schemas.SOAP.org/soap/envelope/"
  xmlns:SOAP-ENC="http://schemas.SOAP.org/soap/encoding/"
>
  <SOAP-ENV:Body>
    <m:GetPriceResponse xmlns:m="Some-URI">
      <Price>34</Price>
    </m:GetPriceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

SQL Class

Understanding SQL Class

You can create SQL definitions in Application Designer. These can be entire SQL programs, or just fragments of SQL statements that you want to re-use. PeopleCode provides the SQL class for accessing these SQL definitions in your PeopleCode program at runtime.

The SQL class provides capability beyond that offered by SQLExec. Unlike SQLExec, which fetches just the first SELECTed row, operations for the SQL class allow iteration over all rows fetched. This can dramatically improve performance if you're doing a million operations and you've set the BulkMode property to True.

A list of input (bind) values, and a list of output variables are supported, as they are in SQLExec. The input and output variables are limited to the same PeopleCode types that can be used with SQLExec, with the addition of a new class called Record.

At runtime, you instantiate a record object from the Record class. A record object is a "one row" instantiation of a record definition.

- When used as an output from an SQL object, each next field in the record is populated with the next column returned.
- When used as an input, several fields in the record are used to replace a single bind marker in the SQL statement. The bind marker for a record describes the type of substitution to be done.

Both records and other PeopleCode types can be mixed in both the output and input.

At runtime, you instantiate a SQL object from the SQL class. The SQL object is loaded by either a constructor for the object, or an explicit Open method call. Optionally, a SQL constructor and the Open method support setting the SQL statement through a string parameter. This capability enables the creation and execution of ad-hoc SQL statements.

The SQL class has a Fetch method for iterating through the rows fetched by a select. A *cursor* is used to control this connection between the runtime SQL object and the database. The cursor is closed automatically when the object goes out of scope. The cursor can be closed before that by using the Close method. The status of the connection is available from the Boolean IsOpen property.

The general status of operations is available from function or method return values or properties. Detailed status is not available, as the operations are designed to terminate on unexpected errors or errors that cannot be reasonably recovered from by application level logic.

Considerations for Extra Spaces

On the DB2 for OS/390 and z/OS platform, when the zparm option is set to decimal equals comma (so comma is used as the database decimal separator), extra blanks are added after commas to ensure that they are not mistaken for decimal separators.

Considerations for Case Sensitivity

When processing a SQL statement, the system automatically casts all fieldnames and possibly record names to uppercase when processing a SQL statement. When processing records from a third party, fields that are lowercase get cast into uppercase, which can create a runtime issue on case sensitive platforms.

To prevent this, use the %NoUppercase meta-SQL statement at the beginning of the SQL statement.

Related Topics

- [Understanding SQL Objects and Application Engine Programs](#)
A global variable won't go out of scope until a Application Engine program finishes. However, all SQL objects are forced closed (that is, the cursor closed) sooner than that. *Any open SQL object is forced closed just before any checkpoint in an Application Engine program.* This is to ensure that the application can be restarted successfully from the checkpoint. After the SQL object is closed, you can reopen the SQL object, or query its properties, (such as Status, IsOpen). The simplest way to avoid unnecessary closing of the SQL object is to set the ReuseCursor property to True. A restartable program should always check that SQL objects are open before using them in steps where it's expected they're open. In the absence of an intervening checkpoint, an open SQL object remains open until the Application Engine program finishes.
- [Understanding Record Class](#)
A record object, instantiated from the Record class, is a single instance of a data within a row and is based on a record definition. A record object consists of one to n fields.
- PeopleCode Developer's Guide: Understanding Data Buffer Access
- PeopleCode Language Reference: %NoUppercase meta-SQL element

Using Record Class SQL

There are some SQL type operations that you can do with the Record class, such as INSERT, DELETE and UPDATE. The advantage of using the Record class methods is ease of use, re-use of code, and so on. However, if you're doing many iterations of the same operation (like a million UPDATES) you should use the SQL object with the BulkMode property set to True.

The SQL object maintains a state (that is, a cursor). Hence, if your database can take advantage of BulkMode, instead of a million operations, the commands are "bulked up" and committed only once. This can improve performance dramatically.

Creating a SQL Definition

You can create SQL definitions in Application Designer, using the SQL editor. These SQL statements can be entire SQL programs, or just fragments that you want to re-use. After you have created a SQL definition, you can use it to populate a SQL object (using FetchSQL, Open, or GetSQL)

You can also create a SQL statement in PeopleCode (using CreateSQL), save it as a SQL definition (StoreSQL), then access it in Application Designer.

Related Topics

- [Open method: SQL class](#)
- PeopleCode Developer's Guide: Understanding the SQL Editor Window

- PeopleCode Language Reference: FetchSQL function
- PeopleCode Language Reference: CreateSQL function
- PeopleCode Language Reference: GetSQL function
- PeopleCode Language Reference: StoreSQL function

Binding and Executing of SQL Statements

The processing of an SQL statement involves a series of steps.

1. The binding process is the replacement of (variable) input values in the statement, in places indicated by bind placeholders.

The input values are substituted into the SQL statement in place of the bind placeholders. These placeholders have the form `":number"`, or `"%bindop(:number [, parm]. . .)"` where the *number* indicates which input value is to be substituted, and the *bindop* and *parm* strings indicate what meta-SQL binding function is to be performed.

Note

There must be no spaces between the *bindop* and the left parenthesis.

The following binding meta-SQL functions are used with record objects to substitute various forms of fieldnames and values into the SQL statement. The goal of these binding functions is to enable the writing of SQL and PeopleCode that can manipulate records without dependencies on the exact fields in the records.

- %DTTM
 - %InsertValues
 - %KeyEqual
 - %KeyEqualNoEffDt
 - %List
 - %OldKeyEqual
 - %Table
 - %UpdatePairs
2. The execution of an SQL statement is the carrying out of the operation of the statement by the database engine.

This view of SQL statement processing is actually simpler than what actually occurs. In actual practice, the binding occurs in two distinct phases. The database engine (or its supporting routines) is aware of only the latter phase. For some operations, some database engines are able to delay the second stage of binding and the execution of an SQL statement, so the statement can be rebound and re-executed (with different input values). The advantage of this is that these bindings and executions can be accumulated and transmitted across the network to the database server, with several database operations being done in one network operation. This is sometimes referred to as *bulk mode*. Because the network time consumes most database time operations, the performance advantages of bulk mode can be significant.

However, in bulk mode, individual operations might not be executed immediately by the database engine. The result is that the application might not see errors that arise until later operations are performed.

SQL SELECT statements are not bound multiple times, rather the retrieved rows are accumulated and sent across the network many rows at a time, also decreasing the effect of network delays.

Related Topics

- PeopleCode Language Reference: Understanding Meta-SQL

Fetching From a SELECT

Some operations fetch a row of data into a list of output variables. The values of the fields from the select row are assigned in order to the given output variables. If one of these is a reference to a PeopleCode record object, the fields in the record are assigned the successive values from the row of the select, until all the fields are assigned. Assignment then continues with the next output variable, if any. The number of output fields and variables must equal the number of fields in the row of the select.

Related Topics

- PeopleCode Developer's Guide: Understanding Data Buffer Access

Using Array of Any for Bind Values or Fetch Results

You can use a parameter of type "Array of Any" in place of a list of bind values or in place of a list of fetch result variables for the Execute, Fetch, and Open methods. This is generally used when you don't know how many values are needed until the code runs.

For example, suppose that you had a SQL definition INSERT_TEST, that dynamically (that is, at runtime) generated the following SQL statement:

```
"INSERT INTO PS_TESTREC (TESTF1, TESTF2, TESTF3, TESTF4, . . . N) VALUES
(:1, :2, ⇒
 %DateTimeIn(:3), %TextIn(:4)), . . . N";
```

Suppose you have placed the values to be inserted into an Array of Any, say &AAny:

```
&AAny = CreateArrayAny("a", 1, %DateTime, "abcdefg", . . . N);
```

You can execute the insert with the following:

```
&AAny = CreateArrayAny("a", 1, %DateTime, "abcdefg", . . . N);
&SQL = GetSQL(SQL.INSERT_TEST);
While /* Still something to do */
    &SQL.Execute(&AAny);
End-While;
&SQL.Close();
```

Because the Array of Any promotes to absorb any remaining select columns, it must be the last parameter for the SQL object Fetch method or (for results) SQLExec. For binding, it must be the only bind parameter, as it is expected to supply all the bind values needed.

Reusing a Cursor

Reusing a cursor means *compiling* a SQL statement just once, but *executing* it more than once. When a SQL statement is compiled, the database checks the syntax and chooses a query path. By doing this only once, but executing this statement several times, you can obtain an improvement in performance.

In PeopleCode, you can reuse a cursor either by using the `ReuseCursor` property or by following certain restrictions in your code.

Using the `ReuseCursor` Property

If you specify the `ReuseCursor` property as `True`, the cursor isn't closed until either the SQL object is explicitly closed or re-opened. This provides greater control over the cursor associated with your SQL object. However, when you set `ReuseCursor` to `True`, you're essentially pledging to do the right thing in your program. There are some considerations for how you use this property:

In an Application Engine program, if your program can be restarted, you *must* check for a restart after a checkpoint by testing to see if the SQL object is open after the checkpoint. If it isn't open, that means a restart has happened, and you must reopen the SQL object. In most cases, on checkpoints, your open SQL objects aren't closed, saving the overhead of re-establishing the SQL object after the checkpoint. If the SQL object is open on a select statement at a checkpoint it isn't restored to the open state because you cannot reliably establish the state of the execute-fetch sequence.

In the following example the SQL object is established on a select statement which is executed twice with different bind parameters but is compiled only once. Without the `ReuseCursor` property the SQL object would be closed after the first fetch cycle completes.

```
Local SQL &Sql;
Local String &Company1 = "CCB";
Local String &Company2 = "CCF";

&Sql = CreateSQL("SELECT A.COMPANY, %Timeout(A.EFFDT) FROM
%Table(COMPANY_TBL) A⇒
WHERE A.COMPANY=:1", &Company1);
/* commenting this out should make the subsequent Execute fail */
&Sql.ReuseCursor = True;

While &Sql.Fetch(&Company1, &Effdt)
    /* processing for the first Company */

End-While;

&Sql.Execute(&Company2);

While &Sql.Fetch(&Company1, &Effdt)
    /* processing for the second company */

End-While;

&Sql.Close();
```

Reusing a Cursor Without the ReuseCursor Property

If you want to reuse a cursor in your program, there are several conditions:

- You have to use the SQL object. Only SQL objects retain SQL cursor information.
- For INSERT, DELETE, and UPDATE statements, you automatically reuse the cursor as long as you don't change the SQL statement as part of the binding process. If the SQL statement is textually the same, so only the binds have changed, you get reuse. For example, you won't get reuse if you first bind one kind of record object to %Insert(), then bind another, different kind of record object.
- For SELECTs, you *must* use the meta-SQL shortcuts (%SelectAll, %SelectByKey, or %SelectByKeyEffDt), *and* the CreateSQL or GetSQL functions without supplying any bind or buffer parameters. The bind parameters are supplied in the Execute function. The Fetch parameter must be the fetch buffer, and be the same as the first Execute parameter. You can supply WHERE clauses, ORDER-BY, and so on, on the end of the SQL string containing the meta-SQL.

Note

BulkMode doesn't reuse the cursor in the same way as the SQL object. BulkMode requests that, when the system can reuse the cursor, it also holds all the changes so they can be communicated to the database in batches.

By using one of the forms of the Select meta-SQL, you're guaranteeing the resulting fetched values are all put into one record object (buffer). This means the implementation doesn't have to ask the database for the length and type of each column: the record buffer is already defined. So this sample code uses the SQL object to maintain the state of the connection with the database, and the record object, to maintain a series of fields suitable for database operations.

```
Local SQL &SQL;
Local Record &REC;
```

```
&REC = CreateRecord(Record.KP_KPI_DFN);
```

```
/* start with select statement, no bind refs, no */
/* bind parameters */
```

```
&SQL = CreateSQL("%Selectall(:1) Where SETID = :2 and KPI_ID = :3 and EFFDT =  
⇒  
(SELECT MAX(EFFDT) FROM PS_KP_KPI_DFN WHERE SETID = :4 AND KPI_ID = :5 AND ⇒  
EFFDT <= %DateIn(:6))");
```

Start Loop

```
/* bind and execute the statement */
```

```
&SQL.Execute(&REC, &SETID_KPI, &COMPID, &SETID_KPI, &COMPID, &EFFDT);
```

```
/* Note record parameter for Fetch statement must be  
the same as the first Execute parameter
```

the results are in this record */

If &SQL.Fetch(&REC) Then

 /*process this record */

End-If;

End Loop

&SQL.Close(); /* there is no implicit close on a Fetch returning False */

The following example comes from a Application Engine program. Because the loop goes in and out of PeopleCode, you must declare the SQL object as Global. This example is in three parts.

1. Program called by Application Engine before the loop:

Global SQL &SQL;

&SQL = CreateSQL("INSERT INTO %Table(MY_WORK) (TRANS , REGISTERWRITE)
VALUES (:1, ⇒
:2)");

&SQL.BulkMode = True; /* not required for reuse, but will get better
performance⇒
on platforms that support bulk insert */

2. Program called in the Application Engine loop on SELECT 'X' FROM PSRECDEFN WHERE RECNAME LIKE '%A':

Global SQL &SQL;

&var1 = "X";
&var2 = "Y";

&SQL.Execute(&var1, &var2);

3. Program called by Application Engine after the loop:

Global SQL &SQL;

&SQL.Close();

Understanding SQL Objects and Application Engine Programs

A global variable won't go out of scope until a Application Engine program finishes. However, all SQL objects are forced closed (that is, the cursor closed) sooner than that. *Any open SQL object is forced closed just before any checkpoint in an Application Engine program.* This is to ensure that the application can be restarted successfully from the checkpoint. After the SQL object is closed, you can reopen the SQL object, or query its properties, (such as Status, IsOpen). The simplest way to avoid unnecessary closing of the SQL object is to set the ReuseCursor property to True. A restartable program should always check that SQL objects

are open before using them in steps where it's expected they're open. In the absence of an intervening checkpoint, an open SQL object remains open until the Application Engine program finishes.

Declaring a SQL Object

SQL objects are declared as type SQL. For example:

```
Local SQL &MYSQL;
```

```
Global SQL &MySql = CreateSQL(SQL.MySql);
```

Scope of an SQL Object

An SQL object can be instantiated only from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

Your SQL statements sometimes change the database. When your SQL changes the database, your code should be only in one of the following events:

- SavePreChange
- WorkFlow
- SavePostChange
- Message Subscription
- FieldChange
- Application Engine PeopleCode action

SQL Class Built-in Functions

PeopleCode Language Reference: CreateSQL function

PeopleCode Language Reference: DeleteSQL function

PeopleCode Language Reference: FetchSQL function

PeopleCode Language Reference: GetSQL function

PeopleCode Language Reference: StoreSQL function

SQL Class Methods

In this section, we discuss the SQL class methods. The methods are discussed in alphabetical order.

Close method: SQL class

Syntax

```
Close()
```

Description

The Close method closes the SQL object. This terminates any incomplete fetching of select result rows, completes any buffered operations (that is, using BulkMode), and disassociates the SQL object from any SQL statement that was open on it.

After BulkMode operations, the RowsAffected property is not valid.

Parameters

None

Returns

True on successful completion, False if there was a duplicate record error. Any errors associated with buffered operations (that is, using BulkMode), other than duplicate record errors, cause termination.

Example

```
&SQL = CreateSQL("%Delete(:1)");  
While /* Still something to do */  
    /* Set key field values of &ABS_HIST */  
    &SQL.Execute(&ABS_HIST);  
End-While;  
&SQL.Close();
```

Related Topics

- [Open method: SQL class](#)
- PeopleCode Language Reference: CreateSQL function

Execute method: SQL class

Syntax

Execute(*paramlist*)

Where *paramlist* is an arbitrary-length list of values in the form:

inval1 [, *inval2*] ...

Description

The Execute method executes the SQL statement of the SQL object. The SQL object must be open and unbound on a delete, insert, or update statement. That is, the CreateSQL, GetSQL, or Open preceding the Execute must have specified a delete, insert, or update statement with bind placeholders and must not have supplied any input values.

The values in *paramlist* are used to bind the SQL statement before it gets executed.

When using the optional BulkMode, the Execute operations may be buffered and are not guaranteed to have been presented to the database until a Close is done. Thus, in BulkMode, errors that arise may not be reported until later operations are done.

Parameters

Parameter	Description
<i>paramlist</i>	Specify input values for the SQL string.

Returns

True on successful completion, False for "record not found" and "duplicate record" errors. Any other errors cause termination.

Example

The following example creates a SQL object for inserting. The statement isn't automatically executed when it's created because there aren't any bind variables. The Execute occurs after other processing is finished. The name of the record is passed in as the bind variable in the Execute method.

```
&SQL = CreateSQL("%Insert(:1)");
While /* Still something to do */
    /* Set all the field values of &ABS_HIST. */
    &SQL.Execute(&ABS_HIST);
End-While;
&SQL.Close();
```

The following example creates two SQL objects, one to be used for fetching, the other for updating the record. The first SQL object selects all the records in the &ABS_HIST record that match &EMPLID. The data is actually retrieved using the Fetch method. After values are set on the record, the update is performed by the Execute.

```
&SQL1 = CreateSQL("%Select(:1) where EMPLID = :2", &ABS_HIST, &EMPLID);
&SQL_UP = CreateSQL("%Update(:1)");
While &SQL1.Fetch(&ABS_HIST);
    /* Set some field values of &ABS_HIST. */
    &SQL_UP.Execute(&ABS_HIST);
End-While;
&SQL_UP.Close();
```

The following is an example of inserting an array of records:

```
Local SQL &SQL;
Local array of Record &RECS;

/* Set up the array of records. */
. . .

/* Create the SQL object open on an insert */
/* statement, and unbound */
&SQL = CreateSQL("%Insert(:1)");
/* While the array has something in it */
While &RECS.Len
    /* Insert the first record of the array, */
    /* and remove it from the array. */
```

```
&SQL.Execute(&RECS.Shift());  
End-While;
```

Related Topics

- [Close method: SQL class](#)
- [BulkMode property: SQL class](#)
- PeopleCode Language Reference: CreateSQL function

Fetch method: SQL class

Syntax

```
Fetch(paramlist)
```

Where *paramlist* is an arbitrary-length list of values in the form:

```
outvar1 [, outvar2] ...
```

Description

The Fetch method retrieves the next row of data from the SELECT that is open on the SQL object. Any errors result in termination of the PeopleCode program with an error message.

If there are no more rows to fetch, Fetch returns as False, the *outvars* are set to their default PeopleCode values, and the SQL object is automatically closed.

Using Fetch with a closed SQL object is processed the same as when there are no more rows to fetch.

Note

If you want to fetch only a single row, the SQLExec function can perform better, as it fetches only a single row from the server.

The return of Fetch is not optional, that is, you *must* check for the value of the fetch.

Parameters

Parameter	Description
<i>paramlist</i>	Specify output variables from the SQL Select statement.

Returns

The result of Fetch is True if a row was fetched. If there are no more rows to fetch, the result is False.

Example

In the following example, the Fetch method is used first to process a single row, then to process the ABS_HIST record.

```
Local SQL &SQL;
Local Record &ABS_HIST;

&ABS_HIST = CreateRecord(RECORD.ABSENCE_HIST);
&SQL = GetSQL(SQL.SEL27, 15, "Smith");
While &SQL.Fetch(&NAME1, &BIRTH_DT)
    /* Process NAME1, BIRTHDT from the selected row. */
End-While;

&SQL.Open(SQL.SEL_ABS_HIST, &NAME1, "Smith");
While &SQL.Fetch(&ABS_HIST)
    /* Process ABS_HIST record. */
```

The following is an example of reading in an array of record objects:

```
Local SQL &SQL;
Local Record &REC;
Local Array of Record &RECS;

/* Get the SQL object open and ready for fetches. */
&SQL = CreateSQL("%SelectAll(:1) where EMPLID = :2", RECORD.ABSENCE_HIST,
&EMPLID);
/* Create the first record. */
&REC = CreateRecord(RECORD.ABSENCE_HIST);
/* Create an empty array of records. */
&RECS = CreateArrayRept(&REC, 0);
While &SQL.Fetch(&REC)
    /* We got a record, add it to the array */
    /* and create another.*/
    &RECS.Push(&REC);
    &REC = CreateRecord(RECORD.ABSENCE_HIST);
End-While;
```

Setting Data Fields to Null

This method will *not* set Component Processor data buffer fields to NULL after a row not found fetching error. However, it does set fields that aren't part of the Component Processor data buffers to NULL. It does set work record fields to NULL.

Related Topics

- [Open method: SQL class](#)
- PeopleCode Language Reference: GetSQL function
- PeopleCode Language Reference: SQLExec function

Open method: SQL class

Syntax

```
Open(sql [, paramlist])
```

Where *paramlist* is an arbitrary-length list of values in the form:

```
inval1 [, inval2] ...
```

Description

The Open method associates the *sql* statement with the SQL object. The *sql* parameter can be either:

- A string value giving the SQL statement.
- A reference to a SQL definition in the form `SQL.sqlname`.

If the SQL object was already open, it is first closed. This terminates any incomplete fetching of select result rows, completes any buffered operations (that is, using BulkMode), and disassociates the SQL object from any SQL statement that was open on it.

Parameters

Parameter	Description
<i>sql</i>	Specify either a SQL string or a reference to a SQL definition in the form <code>SQL.sqlname</code> .
<i>paramlist</i>	Specify input values for the SQL string.

Returns

None.

Example

Generally, you use the Open method only after you've already gotten a reference to another SQL object. SELECT and SEL_ABS_HIST are the names of the SQL definitions created in Application Designer.

```
Local SQL &SQL;  
  
&SQL = GetSQL(SQL.SELECT);  
  
/* do other processing */  
  
/* get next SQL statement for additional processing */  
/* The open automatically closes the previous */  
/* SQL statement */  
  
&SQL.Open(SQL.SEL_ABS_HIST, &NAME1, "Smith");  
While &SQL.Fetch(&ABS_HIST)
```

```
/* Process ABS_HIST record. */  
End-While;
```

Opening and Processing sql

If *sql* is a SELECT statement, it is immediately bound with the *inval* input values and executed. The SQL object should subsequently be the subject of a series of Fetch method calls to retrieve the selected rows. If you want to fetch only a single row, use the SQLExec function instead. If you want to fetch a single row into a PeopleCode record object, use the record Select method.

If *sql* is not a SELECT statement, and either: there are some *inval* parameters, or there are no bind placeholders in the SQL statement, the statement is immediately bound and executed. This means that there is nothing further to be done with the SQL statement and the IsOpen property of the returned SQL object will be False. In this case, using the SQLExec function would generally be more effective. If you want to delete, insert, or update a record object, use the record Delete, Insert, or Update methods with the record object.

If *sql* is not a SELECT statement, there are no *inval* parameters, *and* there are bind placeholders in the SQL statement, the statement is neither bound nor executed. The resulting SQL object should subsequently be the subject of a series of Execute method calls to affect the desired rows.

Setting Data Fields to Null

This method will *not* set Component Processor data buffer fields to NULL after a row not found fetching error. However, it does set fields that aren't part of the Component Processor data buffers to NULL.

Related Topics

- PeopleCode Language Reference: CreateSQL function
- PeopleCode Language Reference: GetSQL function

SQL Class Properties

In this section, we discuss the SQL class properties. The properties are discussed in alphabetical order.

BulkMode property: SQL class

Description

This property controls the use of bulk mode. Setting this property to True enables the use of bulk mode, and hence removes any guarantee of the synchronous presentation of error status.

Bulk mode is used only with those database connections and operations that support it. Bulk mode can be used with any SQL operation, that is, with INSERTs, DELETES, or UPDATES.

If you're using a Application Engine program, and have set this property to True, the rows inserted in BulkMode are committed at the next database commit in your program.

After BulkMode operations, the RowsAffected property is not valid.

The default value for BulkMode is False.

This property is read/write.

Example

The following code is an example of inserting an array of records using bulk mode:

```

Local SQL &SQL;
Local array of Record &RECS;

/* Set up the array of records. */
. . .
/* Create the SQL object open on an insert */
/* statement, and unbound.*/
&SQL = CreateSQL("%Insert(:1)");
/* Try for bulk mode. */
&SQL.BulkMode = True;
/* While the array has something in it&mldr; */
While &RECS.Len
  /* Insert the first record of the array, */
  /* and remove it from the array. */
  If not &SQL.Execute(&RECS.Shift) then
    /* A duplicate record found, possibly */
    /* in bulk mode. There is no way to */
    /* tell which record had the problem. */
    /* One approach to recovery is to fail*/
    /* the transaction and retry it with a*/
    /* process that does only one record */
    /* at a time, that is, doesn't use */
    /* bulk mode.*/
    . . . ;
  End-If;
End-While;

```

Related Topics

- [RowsAffected property: SQL class](#)
- [Binding and Executing of SQL Statements](#)
The processing of an SQL statement involves a series of steps.

IsOpen property: SQL class

Description

This property returns as True if the SQL object is open on some SQL statement.

This property is read-only.

Example

You might use the following in a Application Engine program, after a checkpoint. MYSELECT is the name of a SQL definition created in Application Designer:

```

If Not &MYSQL.IsOpen Then
  &MYSQL.Open(SQL.MYSELECT);
End-if;

```

LTrim property: SQL class

Description

This property specifies whether values read by the Fetch method are trimmed of blanks on the left, except in the following cases:

- For long columns.
- The record is directly used to buffer the incoming data. In the following example, the values aren't LTrimmed - regardless of the setting of the LTrim property.

```
Local Record &Rec = CreateRecord(Record.QA_TEST);
Local SQL &Sql = CreateSQL("%SelectAll(:1)");
&Sql.LTrim = True; /* the default */
&Sql.Execute(&Rec);
While &Sql.Fetch(&Rec)
    /* do processing */
End-While;
```

This property takes a Boolean value. The default value is True. If this property is set to False, the selected values are not trimmed of blanks on the left.

This property is read/write.

Note

The removal of blanks from the right end of fetched values (RTrimming) still occurs for non-long columns.

Example

```
Local Record &Rec = CreateRecord(Record.QA_TEST);
Local SQL &Sql = CreateSQL("%SelectAll(:1)", &Rec);
&Sql.LTrim = False;
While &Sql.Fetch(&Rec)
    /* do processing */
End-While;
```

ReuseCursor property: SQL class

Description

This property specifies whether the SQL object tries to reuse the open cursor. This property takes a Boolean value, True, to reuse the SQL cursor.

If specified as True, the SQL object won't be closed at checkpoints, and any non-SELECT SQL is restored. In addition the SQL object is not closed after a fetch cycle completes. It remains open ready to be executed, perhaps with different bind parameters.

If you use this property in your application program, you *must* close the SQL object explicitly or it is closed when the object goes out of scope (that is, when the program finishes.)

You must instantiate a SQL object first before you can reuse it.

This property is read/write.

Related Topics

- [Reusing a Cursor](#)
Reusing a cursor means *compiling* a SQL statement just once, but *executing* it more than once. When a SQL statement is compiled, the database checks the syntax and chooses a query path. By doing this only once, but executing this statement several times, you can obtain an improvement in performance.

RowsAffected property: SQL class

Description

This property returns the number of rows affected by the last INSERT, UPDATE, or DELETE statement of the SQL object. After BulkMode operations, the RowsAffected property is not valid.

This property is read-only.

Example

The following code is an example that determines if a delete statement actually deleted anything:

Local SQL &SQL;

```
/* Create the SQL object and do the deletion. */
    &SQL = CreateSQL("Delete from %Table(:1) where EMPLID = :1",
RECORD.ABSENCE_⇒
HIST, &EMPLID);
    If &SQL.RowsAffected = 0 Then
        /* We did not delete any rows. */
        . . .
    End-If;
```

Related Topics

- [BulkMode property: SQL class](#)

Status property: SQL class

Description

This property returns the status of the last statement executed. You can use either the constant or the numeric value for this property. The values for this property are:

Numeric Value	Constant Value	Description
0	%SQLStatus_OK	No Errors.
1	%SQLStatus_NotFound	Record not found.
2	%SQLStatus_Duplicate	Duplicate Record Found

This property is read-only.

Example

The following example determines what went wrong after an update:

```

Local SQL &SQL;
Local Record &NEWREC, &OLDREC;

/* Create and initialize &OLDREC with the keys of the
record to be updated. Create and initialize &NEWREC
with the new field values for the record. */
...;

/* Create and execute the update. */
&SQL = CreateSQL("%Update(:1, :2)", &NEWREC, &OLDREC);
Evaluate &SQL.Status
When = %SQLStatus_OK
    /* It worked. */
When = %SQLStatus_NotFound
    /* The OLDREC keys were not found. */
When = %SQLStatus_Duplicate
    /* The NEWREC keys were already there. */
End-Evaluate;

```

TraceName property: SQL class

Description

This property enables you to assign a name to a SQL statement that has been created in PeopleCode using CreateSQL. This name is used in the Application Engine timings trace. This property takes a string value.

Note

You *cannot* associate the TraceName property with the execution of a simple SELECT statement created with CreateSQL. This is because the SELECT is executed when the SQL is created, before it has the TraceName assigned. To do this, create a SQL object instead.

If this property isn't set, it defaults to a substring of the SQL statement, indicating the operation and table, (for example, SELECT PS_VOUCHER_LINE.) It may be useful to set TraceName to indicate the origin of the SQL statement.

This property is read/write.

Example

```

&REC = CreateRecord(Record.VOUCHER_LINE);
&SQL = CreateSQL("%selectall(:1) WHERE BUSINESS_UNIT =:2 AND VOUCHER_ID =:3
AND⇒
    VOUCHER_LINE_NUM = :4");
&SQL.TraceName = "AEPROG.SECT1.STEP1.SQL2";
&SQL.Execute(&REC, MATCHING_AET.BUSINESS_UNIT, MATCHING_AET.VOUCHER_ID,

```

```

&count);
If &SQL.Fetch(&REC) Then
    &count2 = &count2 + 1;
End-If;

```

The previous example would produce the following in the timings trace.

SQL Statement	Count	Time	Count	Time	Count	Time	Time

PeopleCode							
AEPROG1.SECT1.STEP1.SQL1			169	5.371	169	3.083	4.000
AEPROG1.SECT1.STEP1.SQL2			100	5.371	100	3.083	4.454

							8.454

You can use this parameter with the Open statement also. The following is an example of how this works:

```

&Sql1 = CreateObject("SQL");
&Sql1.TraceName = "sql1";
&Sql1.Open("Select %FirstRows(1) 'x' FROM psstatus");
&Sql1.Fetch(&Temp);

&Sql2 = CreateObject("SQL");
&Sql2.TraceName = "sql2";
&Sql2.Open("Select 'x' FROM psstatus");
&Sql2.Fetch(&Temp);

```

Value property: SQL class

Description

This property returns the SQL statement associated with the SQL object as a string.

This property is read-only.

Example

To report an error in a SQL definition, including the actual SQL executed, use the Value property to get the text of the SQL statement:

```

Local SQL &SQL;

/* Execute some SQL. */
&SQL = CreateSQL(SQL.SOMESQL, &EMPLID);
If &SQL.Status = %SQLStatus.NotFound Then
    /* Get the SQL string used. */
    &SQLSTR = &SQL.Value;
    /* Report the error. */
    . . . ;
End-If;

```


Tile Wizard and Other Tile Classes

Understanding the Tile Wizard Classes

Oracle provides three Tile Wizard classes to help you create tile definitions and dynamic content for tiles:

- **Tile** — To define dynamic tile content using PeopleCode, implement a custom application class from the delivered PTGP_APPCLASS_TILE:Tiles:Tile base class. See [Implementing an Application Class for Tile Content](#) for more information. Then, associate your custom application class to a tile definition in Tile Wizard. See Portal Technology: Step 2: Data Source Information - Application Class for more information.
- **ImageTile** Use the PTGP_APPCLASS_TILE:API:ImageTile class to create, publish, or update an image tile definition using PeopleCode.
- **FreeTextTile** Use the PTGP_APPCLASS_TILE:API:FreeTextTile class to create, publish, or update a free text tile definition using PeopleCode. Because the FreeTextTile class is a subclass of the ImageTile class, many of the methods and properties of the ImageTile class are inherited by and apply to the FreeTextTile class.

Related Topics

- [Tile Class Methods](#)
In this section, the Tile class methods are presented in alphabetical order.
- [Tile Class Properties](#)
In this section, the Tile class properties are presented in alphabetical order.
- [ImageTile Class Methods](#)
In this section, the ImageTile class methods are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these methods are also inherited by and apply to the FreeTextTile class.
- [ImageTile Class Properties](#)
In this section, the ImageTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these properties are also inherited by and apply to the FreeTextTile class.
- [FreeTextTile Class Methods](#)
In this section, the FreeTextTile constructor method is described. Because the FreeTextTile class is an implementation of the ImageTile class, the methods and properties of the ImageTile class are inherited by and apply to the FreeTextTile class. In particular, refer to the documentation on these methods of the ImageTile class:
- [FreeTextTile Class Properties](#)
In this section, the FreeTextTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, the properties and methods of the FreeTextTile class are inherited by and apply to the FreeTextTile class.

Understanding Other Tile Classes

Additional application classes support creating and managing tile definitions.

Write a custom application class that extends the PTGP_APPCLASS_TILE:API:TileAppFilter base class to control whether a tile is displayed or hidden on fluid homepages and dashboards based on application-specific business logic.

Related Topics

- [TileAppFilter Class Methods](#)
In this section, the TileAppFilter class methods are presented in alphabetical order.
- Portal Technology: Hiding or Displaying Tiles Using an Application Class


Understanding Application Class Tile Content

When you specify an application class as the data type in Tile Wizard, in addition to specifying the application class ID, you also specify these options in Tile Wizard:

- Tile content type
- Live data (on/off)
- Badge data (on/off)

These options determine what dynamic content and data will appear in the tile. Your implementation of the application class in PeopleCode will determine the specifics of the dynamic content and data. However, your PeopleCode implementation can also override the options chosen in Tile Wizard.

The following diagram illustrates where these items appear within a tile and where these items are defined (Tile Wizard, PeopleCode, or both). These items are described in more detail in the sections that follow this diagram.

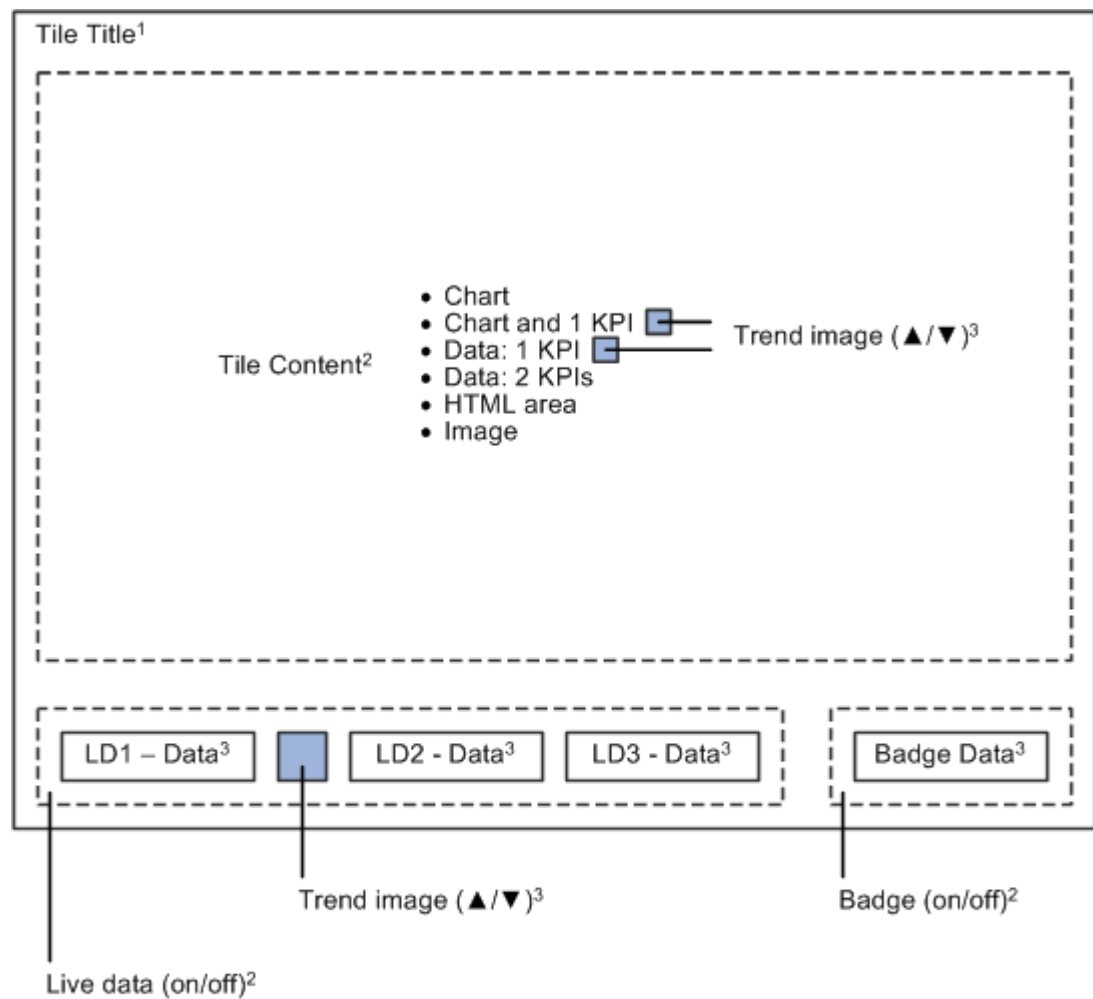

1 – Set in Tile Wizard only.

2 – Set in Tile Wizard. Can be overridden by PeopleCode.

3 – Set by PeopleCode only.

Tile Title

The tile's title appears in the title bar at the top of the tile. The title is defined at Step 1 in Tile Wizard, and cannot be overridden in PeopleCode.

Tile Content

The tile content consumes the majority of the face of the tile, beneath the title bar and above the live data and badge areas on the tile. While the tile content type is specified at Step 2 in Tile Wizard, it can be overridden in PeopleCode. The specific tile data for any tile content type must be defined in PeopleCode.

Related Topics

- [getTileLiveData method: Tile class](#)

Live Data

The live data region appears at the bottom of the tile. Whether live data is displayed on a tile is specified at Step 2 in Tile Wizard; this setting can be overridden in PeopleCode.

Live data consists of four elements, each of which is optional:

Live data value 1 + Trend image + Live data value 2 + Live data value 3

Related Topics

- [hasLiveDataDescr property: Tile class](#)
- [TileLiveData_1 property: Tile class](#)
- [TileLiveData_2 property: Tile class](#)
- [TileLiveData_3 property: Tile class](#)
- [TrendImage property: Tile class](#)

Trend Image

A trend image, typically an up or down arrow, is an optional element of the live data region. The trend image depicts at a glance the direction of change of the second live data value, which is typically a metric or numerical value.

When a trend image is enabled with the `hasLivedataTrendImage` property, it can be displayed with a key performance indicator (KPI) instead when only a single KPI is displayed as tile content (either the 1 KPI or the chart and 1 KPI content types).

Note

Only one trend image can be displayed on a tile. The default location is in the live data area. Therefore, if you want to associate a trend image with KPI data, you should not enable the live data area for the tile. If you enable the live data area, the trend image will be displayed there and not with the KPI data.

Related Topics

- [hasLivedataTrendImage property: Tile class](#)
- [TrendImage property: Tile class](#)

Badge Data

The badge data region appears at the bottom right of the tile, to the right of the live data region. A badge is a simple integer, typically a count of items (for example, new requisitions, open purchase orders, and so on).

Related Topics

- [setTileHasCount method: Tile class](#)
- [hasLiveDataCount property: Tile class](#)
- [TileTransCount property: Tile class](#)


Example of Tile Content

The following example illustrates how tile content, live data, and badge data will appear together on a tile, and which properties were used to set which data values and formatting options. In Tile Wizard, the following options were set for this tile definition:

- Title: Open Requisitions
- Tile content: Data-1-KPI
- Live data: Enabled
- Badge data: Enabled

The following diagram illustrates example tile content:

- TileKPI_1 value: \$1.23
- TileKPI_1_Label value: *Revenue (in Millions)*
- TileLiveData_1 value: *As of 11:50 AM*
- TrendImage value: ▲
- TileLiveData_2 value: 0.18%
- TileTransCount value: 5

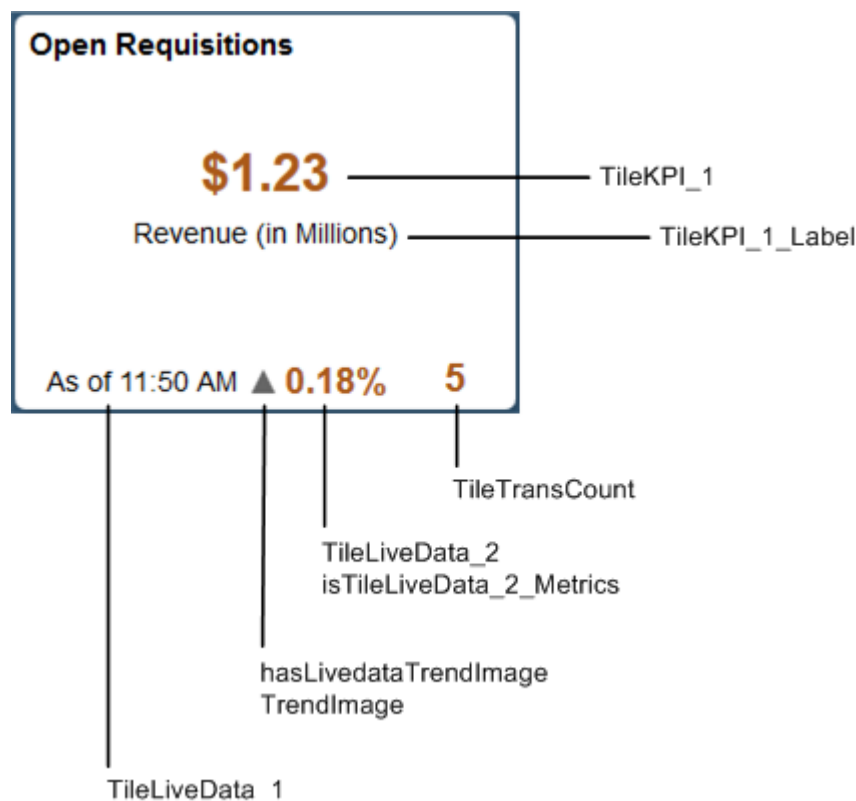

The following PeopleCode excerpt provides an example of how specific data values and formatting options were set for this tile:

```
/* 1 KPI tile content */
%This.TileKPI_1 = %This.getAmountFormattedValue(1.23456789, "USD");
```

```

%This.TileKPI_1_Label = "Revenue (in Millions)";

/* Live data */
%This.TileLiveData_1 = "As of " | DateTimeToLocalizedString(%Datetime, "h:mm
a");

%This.hasLiveDataTrendImage = True;
%This.TrendImage = %This.k_strTrendUpImage;

%This.TileLiveData_2 = "0.18%";
%This.isTileLiveData_2_Metrics = True;

/* Tile badge */
%This.TileTransCount = &req_cnt;

```

Implementing an Application Class for Tile Content

To implement an application class for tile content, do the following in your application class definition:

1. Import the base class (also referred to as the superclass):

```
import PTGP_APPCLASS_TILE:Tiles:Tile;
```

2. In the class declaration, do the following:

- a. Indicate that your class (the subclass) extends the base class.
- b. Declare the constructor method for your class.
- c. Declare the required `getTileLiveData` method.
- d. (Optional) Declare any additional private methods and properties required by your implementation.

```

class My_Tile extends PTGP_APPCLASS_TILE:Tiles:Tile
    method My_Tile();
    method getTileLiveData();
end-class;

```

3. In the constructor method for your class, instantiate an object of the superclass:

```

method My_Tile
    %Super = create PTGP_APPCLASS_TILE:Tiles:Tile();
end-method;

```

4. In your implementation of the required `getTileLiveData` method, do the following:

- a. (Optional) Override the content type by invoking one of the optional `SetTileContentAs*` methods.
- b. (Optional) Override whether live data is displayed on the tile by invoking the `setTileLiveData` method or setting the `hasLiveDataDescr` property.
- c. (Optional) Override whether badge data is displayed on the tile by invoking the `setTileHasCount` method or setting the `hasLiveDataCount` property.

- d. For the tile content type selected, invoke any require methods and set all required properties for that content type. See [Properties and Methods Required by Tile Content Type](#) for more information.
 - e. If live data is enabled for the tile, set all required properties for live data. See [Live Data](#) for more information.
 - f. If badge data is enabled for the tile, set all required properties for badge data. See [Badge Data](#) for more information.
 - g. (Optional) Implement error handling by setting the hasContent property.
5. Create a tile definition in Tile Wizard. At Step 2, specify your custom application class. See Portal Technology: Step 2: Data Source Information - Application Class for more information.

Properties and Methods Required by Tile Content Type

Each tile content type requires that you set required properties or invoke certain methods.

Chart

When you select the chart content type, use these properties and methods:

- [Tilechart property: Tile class](#)
- (Optional) [SetTitleContentAsChart method: Tile class](#)

Chart and 1 KPI

When you select the chart and 1 KPI content type, use these properties and methods:

- [Tilechart property: Tile class](#)
- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)
- (Optional) [SetTitleContentAsChartAndKPI method: Tile class](#)
- (Optional) [hasLivedataTrendImage property: Tile class](#)
- (Optional) [TrendImage property: Tile class](#)

1 KPI

When you select the 1 KPI content type, use these properties and methods:

- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)
- (Optional) [SetTitleContentAsOneKPI method: Tile class](#)
- (Optional) [hasLivedataTrendImage property: Tile class](#)
- (Optional) [TrendImage property: Tile class](#)

2 KPIs

When you select the 2 KPIs content type, use these properties and methods:

- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)

- [TileKPI_2 property: Tile class](#)
- [TileKPI_2_Label property: Tile class](#)
- (Optional) [TileKPI_2_Layout property: Tile class](#)
- (Optional) [SetTitleContentAsOneKPI method: Tile class](#)
- (Optional) [SetTitleContentAsTwoKPIsTopBottom method: Tile class](#)

HTML Area

When you select the HTML area content type, use these properties and methods:

- [TileHtmlArea property: Tile class](#)
- [TileHtmlAreaStyle property: Tile class](#)
- (Optional) [SetTitleContentAsHTML method: Tile class](#)

Image

When you select the image content type, use these properties and methods:

- [ImageReferenceField property: Tile class](#) or [setTileImageRef method: Tile class](#)
- [TileImageReferenceLabel property: Tile class](#)
- (Optional) [SetTitleContentAsImage method: Tile class](#)

Tile Class Methods

In this section, the Tile class methods are presented in alphabetical order.

AddContentHTML method: Tile class

Syntax

```
AddContentHTML(&sHTML, &sStyleClass)
```

Description

Invoke the AddContentHTML method to add HTML content to the Tile.ContentArray including style classes (semi-colon separated list) to be applied by the Grouplet API on the container of the HTML structure.

Parameters

Parameter	Description
<i>&sHTML</i>	Specifies the HTML content as a String value.
<i>&sStyleClass</i>	Specifies the style class or style classes separated by a semi-colon as a String value.

Returns

None.

Example

```
method LoadSection
    /* Extends/implements PTNUI:Dynamic:DynamicLoader.LoadSection */
    /*AddOnLoadScript("console.log('LoadSection for '", "" |
EscapeHTML(%This.Section.SectionName) | """);"); */
    Local PTNUI:Model:Tile &oTile;
    &oTile = %This.CreateTileUsingTab("", "Life Events");
    &oTile.RowNum = %This.GetNextRowNumber();
    &oTile.GltImageName = Image.QE_LIFE_EVENTS;
    %This.SetupFluidTarget(&oTile,
GenerateComponentContentURL(%This.Tab.PortalName, %This.Tab.NodeName,
MenuName.MYMENU, %Market, Component.MYCOMPONENT, Page.MYPAGE1,
%Action_Updatedisplay));
    &oTile.AddContentText("Last Accessed: 31 May 2024", "psc_secondary-text
psc_tile_livedata");
    &oTile.AddContentText("Pending: Document Submissions", "psc_secondary-
text");
    &oTile.AddContentHTML("<span class='ps-text psc_emphasis-text psc_font-
size12em'>80&percent; </span><span class='ps-text'>Completed</span>", "");
    &oTile.IsSmallFFOptimized = 0;
    %This.AddTileToSection(&oTile);
end-method;
```

Related Topics

- [AddContentText method: Tile class](#)

AddContentText method: Tile class

Syntax

AddContentText(*&sText*, *&sStyleClass*)

Description

Invoke the AddContentText method to add text content to the Tile.ContentArray including style classes (semi-colon separated list) to be applied by the Grouplet API on the container of the text.

Parameters

Parameter	Description
<i>&sText</i>	Specifies the text content as a String value.
<i>&sStyleClass</i>	Specifies the style class or style classes separated by a semi-colon as a String value.

Returns

None.

Related Topics

- [AddContentHTML method: Tile class](#)

getAmountFormattedValue method: Tile class

Syntax

```
getAmountFormattedValue(num_val, currency_cd)
```

Description

Invoke the `getAmountFormattedValue` method to return a `String` value that represents a numeric value that has been formatted with the currency symbol corresponding to the specified currency code.

Parameters

Parameter	Description
<i>num_val</i>	Specifies the numeric value to be formatted as a <code>Number</code> value.
<i>currency_cd</i>	Specifies the currency code as a <code>String</code> value.

Returns

A `String` value.

Example

```
&total = &sub_tot1 + &sub_tot2;  
%This.TileKPI_1 = %This.getAmountFormattedValue(&total, "USD");
```

Related Topics

- Using and Managing the PeopleSoft Online Help: ISO Country and Currency Codes

getTileLiveData method: Tile class

Syntax

```
getTileLiveData()
```

Description

This abstract method in the base class must be implemented in the subclass. In your implementation, you must set all properties required for the specified content type.

In addition, your implementation can include optional method invocations to dynamically override whether live data is displayed, whether a badge is displayed, or even the tile content type (by invoking one of the `SetTileContentAs*` methods).

Parameters

None.

Returns

None.

Example

```
method getTileLiveData
    /* Extends/implements PTGP_APPCLASS_TILE:Tiles:Tile.getTileLiveData */
    Local string &title, &img;
    SQLExec("Select DESCR, PTGPLT_IMAGE FROM PS_PTPPB_GROUPLET Where
PTPPB_GROUPLET_ID = :1", %This.TileID, &title, &img);

    %This.ImageReferenceField.Value = @("Image." | &img);
    %This.TileImageReferenceLabel = &title;

end-method;
```

Related Topics

- [Implementing an Application Class for Tile Content](#)
To implement an application class for tile content, do the following in your application class definition:

SetTileContentAsChart method: Tile class

Syntax

```
SetTileContentAsChart()
```

Description

Invoke the SetTileContentAsChart method within your implementation of the getTileLiveData method only if you wish to dynamically override the tile content type to display a chart at runtime.

If you invoke this method, then the Tilechart property is required.

Parameters

None.

Returns

None.

Related Topics

- [Tilechart property: Tile class](#)

SetTileContentAsChartAndKPI method: Tile class

Syntax

```
SetTileContentAsChartAndKPI()
```

Description

Invoke the `SetTileContentAsChartAndKPI` method within your implementation of the `getTileLiveData` method only if you wish to dynamically override the tile content type to display a chart and key performance indicator (KPI) at runtime.

If you invoke this method, then the `Tilechart`, `TileKPI_1`, and `TileKPI_1_Label` properties are required.

Parameters

None.

Returns

None.

Related Topics

- [Tilechart property: Tile class](#)
- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)

SetTileContentAsHTML method: Tile class

Syntax

```
SetTileContentAsHTML()
```

Description

Invoke the `SetTileContentAsHTML` method within your implementation of the `getTileLiveData` method only if you wish to dynamically override the tile content type to display an HTML area at runtime.

If you invoke this method, then the `TileHtmlArea` property is required; the `TileHtmlAreaStyle` property is optional.

Parameters

None

Returns

None.

Related Topics

- [TileHtmlArea property: Tile class](#)
- [TileHtmlAreaStyle property: Tile class](#)

SetTileContentAsImage method: Tile class

Syntax

```
SetTileContentAsImage()
```

Description

Invoke the SetTileContentAsImage method within your implementation of the getTileLiveData method only if you wish to dynamically override the tile content type to display an image at runtime. When the tile content is specified to be an image, either setTileImageRef method or the ImageReferenceField property is required.

Parameters

None.

Returns

None.

Related Topics

- [setTileImageRef method: Tile class](#)
- [ImageReferenceField property: Tile class](#)
- [TileImageReferenceLabel property: Tile class](#)

SetTileContentAsOneKPI method: Tile class

Syntax

```
SetTileContentAsOneKPI()
```

Description

Invoke the SetTileContentAsOneKPI method within your implementation of the getTileLiveData method only if you wish to dynamically override the tile content type to display one KPI at runtime.

If you invoke this method, then the TileKPI_1 and TileKPI_1_Label properties are required.

Parameters

None.

Returns

None.

Related Topics

- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)

SetTileContentAsTwoKPIs method: Tile class

Syntax

```
SetTileContentAsTwoKPIs()
```

Description

Invoke the `SetTileContentAsTwoKPIs` method within your implementation of the `getTileLiveData` method only if you wish to dynamically override the tile content type to display two KPIs at runtime. With this method, the KPI data will be displayed side-by-side on the tile, rather than stacked. As an alternative, you can set the `TileKPI_2_Layout` property to change the orientation of the KPI data after invoking the `SetTileContentAsTwoKPIs` method.

If you invoke this method, then the `TileKPI_1`, `TileKPI_1_Label`, `TileKPI_2`, and `TileKPI_2_Label` properties are required.

Parameters

None.

Returns

None.

Related Topics

- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)
- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)
- [TileKPI_2 property: Tile class](#)
- [TileKPI_2_Label property: Tile class](#)
- [TileKPI_2_Layout property: Tile class](#)

SetTileContentAsTwoKPIsTopBottom method: Tile class

Syntax

```
SetTileContentAsTwoKPIsTopBottom()
```

Description

Invoke the `SetTileContentAsTwoKPIsTopBottom` method within your implementation of the `getTileLiveData` method only if you wish to dynamically override the tile content type to display two KPIs at runtime. With this method, the KPI data will be stacked on the tile, rather than side-by-side.

If you invoke this method, then the `TileKPI_1`, `TileKPI_1_Label`, `TileKPI_2`, and `TileKPI_2_Label` properties are required.

Parameters

None.

Returns

None.

Related Topics

- [SetTileContentAsTwoKPIs method: Tile class](#)
- [TileKPI_1 property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)
- [TileKPI_2 property: Tile class](#)
- [TileKPI_2_Label property: Tile class](#)
- [TileKPI_2_Layout property: Tile class](#)

setTileContentOption method: Tile class

Description

Instead of setTileContentOption, use one of the SetTileContentAs* methods to set the tile content type.

setTileHasCount method: Tile class

Syntax

```
setTileHasCount(badge_display)
```

Description

Invoke the setTileHasCount method within your implementation only if you wish to dynamically override whether the badge area is enabled (that is, whether badge data is displayed). Invoking this method is equivalent to setting the hasLiveDataCount property. If the badge is enabled, you must also set the badge data with the TileTransCount property.

Parameters

Parameter	Description
<i>badge_display</i>	Specify a String value: • Y - Indicates that the badge area is enabled for this tile. • N - Indicates that the badge area is disabled for this tile.

Returns

None.

Example

```
%This.setTileHasCount("Y"); /* Enables the badge area. */  
%This.TileTransCount = MY_REC.COUNT;
```

Related Topics

- [hasLiveDataCount property: Tile class](#)
- [TileTransCount property: Tile class](#)

setTileID method: Tile class

Syntax

```
setTileID(Tile_ID)
```

Description

Invoke the setTileID method within your implementation only if you wish to dynamically override the ID specified for this tile at runtime.

Parameters

Parameter	Description
<i>Tile_ID</i>	Specifies the new tile ID as a String value.

Returns

None.

Related Topics

- [TileID property: Tile class](#)

setTileImageRef method: Tile class

Syntax

```
setTileImageRef(image_name)
```

Description

Invoke the setTileImageRef method to specify the image to be displayed when the tile's content type is specified as an image. Invoking this method is equivalent to specifying a value for the ImageReferenceField property. When the tile content is specified to be an image, either this method or the ImageReferenceField property is required.

Parameters

Parameter	Description
<i>image_name</i>	Specifies the image ID as a String value.

Returns

None.

Example

```
REM %This.ImageReferenceField.Value = Image.PTFP_DEFAULT_CLOUD; /* Property
equivalent */

%This.setTileImageRef("PTFP_DEFAULT_CLOUD");
%This.TileImageReferenceLabel("My tooltip");
```

Related Topics

- [SetTileContentAsImage method: Tile class](#)
- [ImageReferenceField property: Tile class](#)
- [TileImageReferenceLabel property: Tile class](#)

setTileLiveData method: Tile class

Syntax

```
setTileLiveData(livedata_display)
```

Description

Invoke the setTileLiveData method within your implementation only if you wish to dynamically override whether the live data area is enabled (that is, whether live data is displayed). Invoking this method is equivalent to setting the hasLiveDataDescr property. If live data is enabled, you must also specify one or more live data values with the TileLiveData_1, TrendImage, TileLiveData_2, and TileLiveData_3 properties.

Parameters

Parameter	Description
<i>livedata_display</i>	Specify a String value: • Y - Indicates that the live data area is enabled for this tile. • N - Indicates that the live data area is disabled for this tile.

Returns

None.

Example

```
%This.setTileLiveData("Y"); /* Enables the live data area. */

%This.TileLiveData_1 = "Value 1";
%This.hasLiveDataTrendImage = True; /* Optional trend image */
%This.TrendImage = %This.k_strTrendUpImage;
%This.TileLiveData_2 = "Value 2";
%This.TileLiveData_3 = "Value 3";
```

Related Topics

- [hasLiveDataDescr property: Tile class](#)
- [TileLiveData_1 property: Tile class](#)
- [TileLiveData_2 property: Tile class](#)
- [TileLiveData_3 property: Tile class](#)
- [TrendImage property: Tile class](#)

Tile method: Tile class

Syntax

Tile()

Description

The Tile method is the constructor for the superclass. In your implementation, the constructor for your subclass must instantiate an object of the superclass using %Super.

Parameters

None

Returns

None.

Example

```
method My_Tile
    %Super = create PTGP_APPCLASS_TILE:Tiles:Tile();
end-method;
```

Related Topics

- PeopleCode Language Reference: %Super system variable

Tile Class Properties

In this section, the Tile class properties are presented in alphabetical order.

GroupletIDStyleClass property: Tile class

Description

Use the GroupletIDStyleClass property to specify a custom style class as a String value. The custom style class must be defined in a custom free-form style sheet that you have attached using the TileSpecificStyleSheet property.

This property is read/write.

Example

```
/* Custom free-form style sheet */
%This.TileSpecificStyleSheet = StyleSheet.MY_TILES_CSS;

/*Apply your custom style class to the tile content */
%This.GroupletIDStyleClass = "my_custom_style";
```

Related Topics

- [TileSpecificStyleSheet property: Tile class](#)

hasContent property: Tile class

Description

Use the hasContent property to set or return a Boolean value indicating whether the tile has content defined. This property provides you with an opportunity to perform alternate processing when an error condition has occurred.

When you set hasContent to False, you should define the following tile properties:

- An image in lieu of content (optional).
- PreferencesUrl (optional).
- PreferencesUrlLabel (required).

This property is read/write.

Example

```
If no_error_condition Then
    /* Normal processing of tile content */
Else
    %This.hasContent = False;
    %This.setTileImageRef("IMG_MISSING_DATA");
    %This.PreferencesUrlLabel = "No Data Available";
    %This.PreferencesUrl = "http://myserver.example.com/psc/my_site/EMPLOYEE/
MY_NODE/c/MY_MENU.MY_COMPONENT.GBL";
End-If;
```

Related Topics

- [PreferencesUrl property: Tile class](#)
- [PreferencesUrlLabel property: Tile class](#)

hasLiveDataCount property: Tile class

Description

Use the hasLiveDataCount property to set or return a Boolean value indicating whether the badge area is enabled. Set this property within your implementation only if you wish to dynamically override whether the badge area is enabled (that is, whether badge data is displayed). Setting this property is equivalent to invoking the setTileHasCount method. If the badge is enabled, you must also set the badge data with the TileTransCount property.

This property is read/write.

Example

```
%This.hasLiveDataCount = True; /* Enables the badge area. */  
%This.TileTransCount = MY_REC.COUNT;
```

Related Topics

- [setTileHasCount method: Tile class](#)
- [TileTransCount property: Tile class](#)

hasLiveDataDescr property: Tile class

Description

Use the hasLiveDataDescr property to set or return a Boolean value indicating whether the live data area is enabled. Set this property within your implementation only if you wish to dynamically override whether the live data area is enabled (that is, whether live data is displayed). Setting this property is equivalent to invoking the setTileLiveData method. If live data is enabled, you must also specify one or more live data values with the TileLiveData_1, TrendImage, TileLiveData_2, and TileLiveData_3 properties.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True; /* Enables the live data area. */  
  
%This.TileLiveData_1 = "Value 1";  
%This.hasLivedataTrendImage = True; /* Optional trend image */  
%This.TrendImage = %This.k_strTrendUpImage;  
%This.TileLiveData_2 = "Value 2";  
%This.TileLiveData_3 = "Value 3";
```

Related Topics

- [setTileLiveData method: Tile class](#)
- [TileLiveData_1 property: Tile class](#)
- [TileLiveData_2 property: Tile class](#)
- [TileLiveData_3 property: Tile class](#)
- [TrendImage property: Tile class](#)

hasLivedataTrendImage property: Tile class

Description

Use the hasLivedataTrendImage property to set a Boolean value indicating whether to display an optional trend image (up or down). When a trend image is enabled, it is displayed preceding the TileLiveData_2 element in the live data area or with the first KPI data value only when a single KPI is displayed (either the 1 KPI or the chart and 1 KPI content types).

Note

Only one trend image can be displayed on a tile. The default location is in the live data area. Therefore, if you want to associate a trend image with KPI data, you should not enable the live data area for the tile. If you enable the live data area, the trend image will be displayed there and not with the KPI data.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;  
%This.TileLiveData_2 = NumberToString("%10.2v", &nMetric) | "%";  
%This.isTileLiveData_2_Metrics = True;  
  
/* A trend arrow is an optional element of live data. */  
%This.hasLivedataTrendImage = True;  
%This.TrendImage = %This.k_strTrendUpImage;
```

Related Topics

- [TileKPI_1 property: Tile class](#)
- [TileLiveData_2 property: Tile class](#)
- [TrendImage property: Tile class](#)

ImageReferenceField property: Tile class

Description

Use the ImageReferenceField property to specify the image to be displayed when the tile's content type is specified as an image. Setting a value for this property is equivalent to invoking the setTileImageRef method. When the tile content is specified to be an image, either this property or the setTileImageRef method is required.

Because ImageReferenceField is actually a Field object, you must set its Value property as follows:

```
%This.ImageReferenceField.Value  
= Image.IMAGE_ID;
```

This property is read/write.

Example

```
REM %This.setTileImageRef("MY_IMAGE"); /* Method equivalent */  
  
%This.ImageReferenceField.Value = Image.MY_IMAGE;  
%This.TileImageReferenceLabel("My tooltip");
```

Related Topics

- [SetTileContentAsImage method: Tile class](#)

- [setTileImageRef method: Tile class](#)
- [TileImageReferenceLabel property: Tile class](#)

IncludeSourceInURL property: Tile class

Description

Use the IncludeSourceInURL property to set a Boolean value indicating whether both the homepage ID (TABID) and section ID (SECTID) should be passed in the query string of the Action URL (the target content). Use the property specifically for a tile, which is used as a section action button.

This property is read/write.

Related Topics

- [IsButtonRole property: Tile class](#)

IsButtonRole property: Tile class

Description

Use the IsButtonRole property to set a Boolean value indicating whether the tile should have an aria role of button rather than the default, which is a link. Use this property specifically for a tile, which is used as a section action button, for example to perform an action, such as edit or configuration for the section.

This property is read/write.

Related Topics

- [IncludeSourceInURL property: Tile class](#)
- Portal Technology: Creating Different Presentations of Tiles

IsDynamic property: Tile class

Description

Use the IsDynamic property when you use the DynamicLoader class CreateTile convenience routines. If this property is not set, the homepage does not properly refresh dynamic tiles on every load of the homepage.

This property is read/write.

Related Topics

- [CreateTile method: DynamicLoader class](#)
- [CreateTileUsingTab method: DynamicLoader class](#)

IsNotTile property: Tile class

Description

Use the IsNotTile property to set a Boolean value indicating that the tile should not have the aria-roledescription as a tile, which is the default. Use this property specifically for a tile, which is used as a section action button or as a link (hyperlink).

This property is read/write.

isTileLiveData_1_Metrics property: Tile class

Description

Use the isTileLiveData_1_Metrics property to set a Boolean value indicating whether to format the TileLiveData_1 element as a metric similar to the badge metric (in tangerine orange and in bold).

Note

While this formatting style can also be used with the first live data element (TileLiveData_1), it is typically used with the second live data element only.

This property is read/write.

Related Topics

- [TileLiveData_1 property: Tile class](#)

isTileLiveData_1_MetricsLabel property: Tile class

Description

Use the isTileLiveData_1_MetricsLabel property to set a Boolean value indicating whether to format the TileLiveData_1 element with a metrics label style.

Note

The isTileLiveData_1_MetricsLabel property and the metrics label style do not produce any visual formatting change for this live data element.

This property is read/write.

Related Topics

- [TileLiveData_1 property: Tile class](#)

isTileLiveData_2_Metrics property: Tile class

Description

Use the isTileLiveData_2_Metrics property to set a Boolean value indicating whether to format the TileLiveData_2 element as a metric similar to the badge metric (in tangerine orange and in bold). This is the recommended formatting for the second live data element.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;  
%This.TileLiveData_2 = NumberToString("%10.2v", &nMetric) | "%";  
%This.isTileLiveData_2_Metrics = True;
```

Related Topics

- [TileLiveData_2 property: Tile class](#)

isTileLiveData_2_MetricsLabel property: Tile class

Description

Use the isTileLiveData_2_MetricsLabel property to set a Boolean value indicating whether to format the TileLiveData_2 element with the metrics label style.

Note

The isTileLiveData_2_MetricsLabel property and the metrics label style do not produce any visual formatting change for this element.

This property is read/write.

Related Topics

- [TileLiveData_2 property: Tile class](#)

isTileLiveData_3_Metrics property: Tile class

Description

Use the isTileLiveData_3_Metrics property to set a Boolean value indicating whether to format the TileLiveData_3 element as a metric similar to the badge metric (in tangerine orange and in bold).

Note

While this formatting style can also be used with the third live data element (TileLiveData_3), it is typically used with the second live data element only.

This property is read/write.

Related Topics

- [TileLiveData_3 property: Tile class](#)

isTileLiveData_3_MetricsLabel property: Tile class

Description

Use the isTileLiveData_3_MetricsLabel property to set a Boolean value indicating whether to format the TileLiveData_3 element with the metrics label style.

Note

The isTileLiveData_3_MetricsLabel property and the metrics label style do not produce any visual formatting change for this element.

This property is read/write.

Related Topics

- [TileLiveData_3 property: Tile class](#)

LabelLong property: Tile class

Description

Use the LabelLong property to set a tile label, which is greater than 35 characters. By default, the long label will be the same as the standard label if the long label is not explicitly defined.

The long label for tile is stored in the tile CREF and the CREF attribute (PORTAL_LABEL_LONG).

This property is read/write.

PreferencesUrl property: Tile class

Description

Use the PreferencesUrl property to set an alternate target content URL when an error condition exists—for example, when the tile content is invalid. Prior to setting the PreferencesUrl property, set the hasContent property to False.

Specify a String value that is a fully qualified URL that allows the *user* to correct the error condition.

This property is read/write.

Example

```
%This.hasContent = False;  
%This.PreferencesUrl = "http://myserver.example.com/psc/my_site/EMPLOYEE/  
MY_NODE/c/MY_MENU.MY_COMPONENT.GBL";
```

Related Topics

- [hasContent property: Tile class](#)
- [PreferencesUrlLabel property: Tile class](#)

PreferencesUrlLabel property: Tile class

Description

Use the PreferencesUrlLabel property to set an alternate URL label when an error condition exists—for example, when the tile content is invalid. Prior to setting the PreferencesUrlLabel property, set the hasContent property to False.

If a custom URL label is not specified, the system default label is displayed instead.

This property is read/write.

Example

```
%This.hasContent = False;  
%This.PreferencesUrlLabel = "No Data Available";
```

Related Topics

- [hasContent property: Tile class](#)
- [PreferencesUrl property: Tile class](#)

StyleClasses property: Tile class

Description

Use the StyleClasses property to assign style classes at the outer wrapper element containing the tile. Use semi-colon to separate the style classes when multiple style classes need to be entered.

This property is read/write.

Example

```
&oTile.StyleClasses = "psc_theme-tile-transparent;psc_section-action-button";
```

StyleSheets property: Tile class

Description

Use the StyleSheets property to apply style sheets to style the tile. Use semi-colon to separate the style sheets when multiple style sheets need to be entered

This property is read/write.

Example

Tilechart property: Tile class

Description

Use the Tilechart property to instantiate a Chart object for this tile. Using this property is required when the tile content is set to either chart or chart plus one KPI. After associating a

Chart object to this property, you can define additional properties and invoke methods on the Chart object to specify its characteristics.

This property is read/write.

Example

```
Local Chart &my_Chart;  
Local Rowset &rowset;  
  
&rowset = CreateRowset(Record.MY_CHART_DATA);  
&rowset.Flush();  
&rowset.Fill();  
  
/* IMPORTANT: Instantiate your Chart object with this property.  
&my_Chart = %This.Tilechart;  
&my_Chart.SetData(&rowset);  
/* Invoke other Chart class methods and set Chart class properties. */
```

Related Topics

- [SetTileContentAsChart method: Tile class](#)
- [SetTileContentAsChartAndKPI method: Tile class](#)
- [Using the Chart Class](#)
Use the Chart class to create charts that display data series in several common formats, including bar charts, line charts, pie charts, and others.

TileContentOption property: Tile class

Description

Instead of TileContentOption, use one of the SetTileContentAs* methods to set the tile content type.

This property is read/write.

Related Topics

- [Tile Class Methods](#)
In this section, the Tile class methods are presented in alphabetical order.

TileHtmlArea property: Tile class

Description

Use the TileHtmlArea property to set the HTML text for this tile as a string value. Using this property is required when the tile content is set to an HTML area.

This property is read/write.

Example

```
/* Use an HTML definition as the HTML text. */  
%This.TileHtmlArea = GetHTMLText(HTML.MY_HTML);  
  
/* Alternatively, specify the HTML text inline. */
```

```
%This.TileHtmlArea = "<B>%UserId: </B>has exceeded  
quota.<BR><I>%Message(146,51): </I><BR>";
```

Related Topics

- [SetTileContentAsHTML method: Tile class](#)
- [TileHtmlAreaStyle property: Tile class](#)

TileHtmlAreaStyle property: Tile class

Description

Use the TileHtmlAreaStyle property to specify a custom style class for the HTML area as a String value. The custom style class must be defined in a custom free-form style sheet that you have attached using the TileSpecificStyleSheet property.

This property is read/write.

Example

```
/* Custom free-form style sheet */  
%This.TileSpecificStyleSheet = StyleSheet.MY_TILES_CSS;  
  
/*Apply your custom style class to the HTML area */  
%This.TileHtmlAreaStyle = "my_custom_style";
```

Related Topics

- [TileHtmlArea property: Tile class](#)
- [TileSpecificStyleSheet property: Tile class](#)

TileID property: Tile class

Description

Use this property to set or return the ID for this tile. Setting the ID for the tile is equivalent to invoking the setTileID method.

This property is read/write.

Related Topics

- [setTileID method: Tile class](#)

TileImageReferenceLabel property: Tile class

Description

Use the TileImageReferenceLabel property to set a tooltip (sometimes referred to as hover text) for image content as a String value. This tooltip can be read by screen readers and is also displayed as hover text.

This property is read/write.

Example

```
%This.setTileImageRef("MY_IMAGE");  
%This.TileImageReferenceLabel("My tooltip");
```

Related Topics

- [SetTileContentAsImage method: Tile class](#)
- [setTileImageRef method: Tile class](#)
- [ImageReferenceField property: Tile class](#)

TileKPI_1 property: Tile class

Description

Use the TileKPI_1 property to set the first key performance indicator (KPI) data value as a String value. Setting this property is required when you have specified one of the KPI content types in Tile Wizard or you have invoked the one of the following methods: SetTileContentAsChartAndKPI, SetTileContentAsOneKPI, SetTileContentAsTwoKPIs, or SetTileContentAsTwoKPIsTopBottom.

Since KPIs are typically numeric values, you can use the getAmountFormattedValue method or several built-in functions (for example, NumberToString or NumberToDisplayString) to convert the numeric value to a String value.

Set a label for this data value using the TileKPI_1_Label property.

Optionally, you can use the hasLivedataTrendImage property to enable a trend image for display with the first KPI data value only when a single KPI is displayed (either the 1 KPI or the chart and 1 KPI content types).

This property is read/write.

Example

```
&rev = &total_rev / 1000000;  
%This.TileKPI_1 = %This.getAmountFormattedValue(&rev, "USD");  
%This.TileKPI_1_Label = "Revenue (in Millions)";
```

Related Topics

- [getAmountFormattedValue method: Tile class](#)
- [SetTileContentAsChartAndKPI method: Tile class](#)
- [SetTileContentAsOneKPI method: Tile class](#)
- [SetTileContentAsTwoKPIs method: Tile class](#)
- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)
- [hasLivedataTrendImage property: Tile class](#)
- [TileKPI_1_Label property: Tile class](#)
- [TrendImage property: Tile class](#)

TileKPI_1_Label property: Tile class

Description

Use the TileKPI_1_Label property to set the first KPI label as a String value. Setting this property is required when you have specified one of the KPI content types in Tile Wizard or you have invoked the one of the following methods: `SetTileContentAsChartAndKPI`, `SetTileContentAsOneKPI`, `SetTileContentAsTwoKPIs`, or `SetTileContentAsTwoKPIsTopBottom`.

Set the data value to accompany this label using the TileKPI_1 property.

This property is read/write.

Related Topics

- [SetTileContentAsChartAndKPI method: Tile class](#)
- [SetTileContentAsOneKPI method: Tile class](#)
- [SetTileContentAsTwoKPIs method: Tile class](#)
- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)
- [TileKPI_1 property: Tile class](#)

TileKPI_2 property: Tile class

Description

Use the TileKPI_2 property to set the second KPI data value as a String value. Setting this property is required when you have specified the two KPIs content type in Tile Wizard or you have invoked the one of the following methods: `SetTileContentAsTwoKPIs` or `SetTileContentAsTwoKPIsTopBottom`.

Since KPIs are typically numeric values, you can use the `getAmountFormattedValue` method or several built-in functions (for example, `NumberToString` or `NumberToDisplayString`) to convert the numeric value to a String value.

Set a label for this data value using the TileKPI_2_Label property.

This property is read/write.

Related Topics

- [getAmountFormattedValue method: Tile class](#)
- [SetTileContentAsTwoKPIs method: Tile class](#)
- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)
- [TileKPI_2_Label property: Tile class](#)
- [TileKPI_2_Layout property: Tile class](#)

TileKPI_2_Label property: Tile class

Description

Use the TileKPI_2_Label property to set the second KPI label as a String value. Setting this property is required when you have specified the two KPIs content type in Tile Wizard or you

have invoked the one of the following methods: `SetTileContentAsTwoKPIs` or `SetTileContentAsTwoKPIsTopBottom`.

Set the data value to accompany this label using the `TileKPI_2` property.

This property is read/write.

Related Topics

- [SetTileContentAsTwoKPIs method: Tile class](#)
- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)
- [TileKPI_2 property: Tile class](#)
- [TileKPI_2_Layout property: Tile class](#)

TileKPI_2_Layout property: Tile class

Description

When the tile content contains two KPIs, set the `TileKPI_2_Layout` property as an alternative to invoking either the `SetTileContentAsTwoKPIs` or the `SetTileContentAsTwoKPIsTopBottom`. Use the following constants with this property:

- `%This.k_strDataKPI_2_DefaultLayout` - The KPIs are displayed side-by-side (equivalent to `SetTileContentAsTwoKPIs`).
- `%This.k_strDataKPI_2_TopBottom` - The KPIs are displayed stacked (equivalent to `SetTileContentAsTwoKPIsTopBottom`).

This property is read/write.

Related Topics

- [SetTileContentAsTwoKPIs method: Tile class](#)
- [SetTileContentAsTwoKPIsTopBottom method: Tile class](#)

TileLiveData_1 property: Tile class

Description

Use the `TileLiveData_1` property to set the value for the first segment of live data as a String value. To display live data, the live data area must be enabled in the Tile Wizard definition, by invoking the `setTileLiveData` method, or by setting the `hasLiveDataDescr` property.

Typically, `TileLiveData_1` represents a label for the live data.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;  
%This.TileLiveData_1 = "Overall Profit Margin";
```

Related Topics

- [setTileLiveData method: Tile class](#)
- [hasLiveDataDescr property: Tile class](#)

TileLiveData_2 property: Tile class

Description

Use the `TileLiveData_2` property to set the value for the second segment of live data as a String value. To display live data, the live data area must be enabled in the Tile Wizard definition, by invoking the `setTileLiveData` method, or by setting the `hasLiveDataDescr` property.

Typically, `TileLiveData_2` is used to display a metric or other numeric value. Optionally, you can set the `isTileLiveData_2_Metrics` property to format this element as a metric similar to the badge metric (in tangerine orange and in bold). In addition, you can set the `TrendImage` property to display an up or down trend arrow preceding this metric.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;
%This.TileLiveData_2 = NumberToString("%10.2v", &nMetric) | "%";
%This.isTileLiveData_2_Metrics = True;

/* A trend arrow is an optional element of live data. */
%This.hasLiveDataTrendImage = True;
%This.TrendImage = %This.k_strTrendUpImage;
```

Related Topics

- [setTileLiveData method: Tile class](#)
- [hasLiveDataDescr property: Tile class](#)
- [isTileLiveData_2_Metrics property: Tile class](#)
- [TrendImage property: Tile class](#)

TileLiveData_3 property: Tile class

Description

Use the `TileLiveData_3` property to set the value for the third segment of live data as a String value. To display live data, the live data area must be enabled in the Tile Wizard definition, by invoking the `setTileLiveData` method, or by setting the `hasLiveDataDescr` property.

Typically, `TileLiveData_3` is used to display an additional description of the live data.

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;
%This.TileLiveData_3 = "from Q3";
```

Related Topics

- [setTileLiveData method: Tile class](#)

- [hasLiveDataDescr property: Tile class](#)

TileSpecificStyleSheet property: Tile class

Description

Use the TileSpecificStyleSheet to attach a custom free-form style sheet. Then, use either the GroupletIDStyleClass property or the TileHtmlAreaStyle property to specify a custom style class that is defined in the style sheet.

This property is read/write.

Example

```
/* Custom free-form style sheet */
%This.TileSpecificStyleSheet = StyleSheet.MY_TILES_CSS;

/*Apply your custom style class to the tile content */
%This.GroupletIDStyleClass = "my_custom_style";
```

Related Topics

- [GroupletIDStyleClass property: Tile class](#)
- [TileHtmlAreaStyle property: Tile class](#)

TileTransCount property: Tile class

Description

Use the TileTransCount property to set the badge data as a Number value. To display badge data, the badge area must be enabled in the Tile Wizard definition, by invoking the setTileHasCount method, or by setting the hasLiveDataCount property.

This property is read/write.

Example

```
%This.hasLiveDataCount = True; /* Enables the badge area. */
%This.TileTransCount = MY_REC.COUNT;
```

Related Topics

- [setTileHasCount method: Tile class](#)
- [hasLiveDataCount property: Tile class](#)

TrendImage property: Tile class

Description

Use the TrendImage property to set a String value indicating which optional trend arrow (up or down) to display.

Use either of these built-in constant values to set the trend image: %This.k_strTrendUpImage or %This.k_strTrendDownImage.

Alternatively, you can specify a custom trend image by specifying the image ID using the following syntax:

```
%This.TrendImage  
= "MY_TREND_UP";
```

This property is read/write.

Example

```
%This.hasLiveDataDescr = True;  
%This.TileLiveData_2 = NumberToString("%10.2v", &nMetric) | "%";  
%This.isTileLiveData_2_Metrics = True;  
  
/* A trend arrow is an optional element of live data. */  
%This.hasLiveDataTrendImage = True;  
%This.TrendImage = %This.k_strTrendUpImage;
```

Related Topics

- [hasLiveDataTrendImage property: Tile class](#)
- [TileLiveData_2 property: Tile class](#)

UseAltText property: Tile class

Description

Use the UseAltText property to set as a Boolean value indicating whether the title of the tile should be used for the Title and Alt Text if the tile is rendered simply as a button with no text. Typically used for a section-action button, which is rendered as a button with no text. The alternative text is displayed as hover text.

This property is read/write.

Related Topics

- [IsButtonRole property: Tile class](#)
- [IsNotTile property: Tile class](#)

ImageTile Class Methods

In this section, the ImageTile class methods are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these methods are also inherited by and apply to the FreeTextTile class.

AddToHomePage method: ImageTile class

Syntax

```
AddToHomePage(HP_NAME, behavior)
```

Description

Use the `AddToHomePage` method to add the current tile to the specified fluid homepage or fluid dashboard.

Parameters

Parameter	Description
<i>HP_NAME</i>	Specify the ID for the fluid homepage or fluid dashboard content reference definition as string value of up to 30 characters. Note: The ID cannot include spaces or special characters and must not begin with a number.
<i>behavior</i>	Specify the behavior for this tile as a four-character string value.

The *behavior* parameter can have these values:

Value	Behavior	Description
4OPT	Optional	The tile is available to all users for users that have permissions to the tile, but it is not visible by default; users can add, move, or delete the tile.
3DEF	Optional default	The tile is visible to all users by default for users that have permissions to the tile; users can move or delete the tile. Note: You must specify 3DEF if you wish to publish additional tiles to users who have already personalized this homepage or dashboard. See Portal Technology: (Fluid only) Using the Tile Publish Page to Publish Additional Tiles or Portal Technology: (Fluid only) Publishing Additional Tiles to Already Personalized Dashboards for more information.
2REQ	Required	The tile is visible to all users by default for users that have permissions to the tile; users can move the tile, however, they cannot delete it.
1FIX	Required-fixed	The tile is visible to all users by default for users that have permissions to the tile; however, users cannot move or delete it.

Returns

None.

Example

① Note

DEFAULT_LP is the ID for the My Homepage content reference definition.

```
import PTGP_APPCLASS_TILE:API:ImageTile;

Local PTGP_APPCLASS_TILE:API:ImageTile &t1 = create
PTGP_APPCLASS_TILE:API:ImageTile("MY_TILE1");
&t1.AddToHomePage("DEFAULT_LP", "3DEF");
```

Delete method: ImageTile class

Syntax

Delete()

Description

Use the Delete method to delete this tile definition. This method deletes the tile from any fluid homepages and dashboards, deletes the content reference link definition for the tile, and deletes the tile's Tile Wizard definition.

Parameters

None.

Returns

None.

Example

```
import PTGP_APPCLASS_TILE:API:ImageTile;

Local PTGP_APPCLASS_TILE:API:ImageTile &t1 = create
PTGP_APPCLASS_TILE:API:ImageTile("MY_TILE1");
&t1.Delete();
```

ImageTile method: ImageTile class

Syntax

ImageTile(*TILE_NAME*)

Description

The ImageTile constructor is automatically invoked when you instantiate an object of the ImageTile class. It is also invoked as a superclass when you instantiate an object of the FreeTextTile class. The ImageTile method initializes the ImageTile object.

Parameters

Parameter	Description
<i>TILE_NAME</i>	Specifies the ID for the tile as string value of up to 30 characters. This represents the Tile Name of the tile definition in Tile Wizard. Note: The ID cannot include spaces or special characters and must not begin with a number.

Returns

An ImageTile object.

Example

```
import PTGP_APPCLASS_TILE:API:ImageTile;

Local PTGP_APPCLASS_TILE:API:ImageTile &t1 = create
PTGP_APPCLASS_TILE:API:ImageTile("MY_TILE1");
```

Related Topics

- [Name property: ImageTile class](#)

Publish method: ImageTile class

Syntax

Publish()

Description

Use the Publish method to publish a new tile definition and to re-publish any modifications made to an existing tile definition. The initial publication of a tile definition creates the content reference link definition in the portal registry.

! Important

You must always save a new tile definition prior to publishing it.

! Important

This method will fail if any of these properties are undefined: ImageName, TargetCrefName, or Title. However, for a FreeTextTile, the Content property is required instead of the ImageName property.

Parameters

None.

Returns

None.

Example

```
import PTGP_APPCLASS_TILE:API:ImageTile;

Local PTGP_APPCLASS_TILE:API:ImageTile &t1 = create
PTGP_APPCLASS_TILE:API:ImageTile("MY_TILE1");

/* Set required properties. */
&t1.Title = "My Image Tile";
&t1.TargetCrefName = "PT_SC_PERS_DICT_FL_GBL"; /* My Dictionary */
&t1.ImageName = "PS_PREFERENCES_L_FL";          /* My Preferences image */

&t1.Save();                                     /* For a new tile definition,
a save is required. */
&t1.Publish();
```

Related Topics

- [ImageName property: ImageTile class](#)
- [TargetCrefName property: ImageTile class](#)
- [Title property: ImageTile class](#)
- [Content property: FreeTextTile class](#)

Save method: ImageTile class

Syntax

```
Save()
```

Description

Use the Save method to perform an intermediate save of the tile definition in Tile Wizard. Invoking this method is required when you create a new tile definition. You must invoke the Publish method to make the tile definition available or to update an already published definition with modifications.

! Important

This method will fail if any of these properties are undefined: ImageName, TargetCrefName, or Title. However, for a FreeTextTile, the Content property is required instead of the ImageName property.

Parameters

None.

Returns

None.

Example

```
&t1.Save();
```

Related Topics

- [ImageName property: ImageTile class](#)
- [TargetCrefName property: ImageTile class](#)
- [Title property: ImageTile class](#)
- [Content property: FreeTextTile class](#)

ImageTile Class Properties

In this section, the ImageTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these properties are also inherited by and apply to the FreeTextTile class.

Some of these properties are set on or derived from properties of the target page content reference definition—for example, the Height and Width properties correspond to the tile size, which is defined on the Fluid Attributes page of the target page content reference definition. Other properties are set on the content reference link definition that is created to represent the tile in the tile repository—for example, the Description property sets the long description of the content reference link definition.

Related Topics

- Portal Technology: Step 1: Tile Basic Information
- Portal Technology: Step 3: Target Page Information
- Portal Technology: Setting Content Reference Permissions
- Portal Technology: Step 4: Tile Layout Properties
- Portal Technology: Setting Fluid Attributes for Content References

AlternateHeight property: ImageTile class

Description

Use the AlternateHeight property to set or return a number value representing the alternate height for a resizable tile. The default value is 0.

This property corresponds to the Alternate Height field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Example

```
If &t1.IsResizable Then
    &t1.AlternateHeight = 2;
    &t1.AlternateWidth = 2;
End-If;
```

Related Topics

- [AlternateWidth property: ImageTile class](#)
- [IsResizable property: ImageTile class](#)

AlternateWidth property: ImageTile class

Description

Use the AlternateWidth property to set or return a number value representing the alternate width for a resizable tile. The default value is 0.

This property corresponds to the Alternate Width field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Related Topics

- [AlternateHeight property: ImageTile class](#)
- [IsResizable property: ImageTile class](#)

Description property: ImageTile class

Description

Use the Description property to set or return a string value of up to 254 characters representing the long description of the content reference link that is created in the tile repository.

This property corresponds to the Long Description field, which is defined on the General page of the content reference link definition, and in Step 3 in Tile Wizard.

This property is read/write.

DisableHotspot property: ImageTile class

Description

Use the DisableHotspot property to set or return a boolean value indicating whether to disable displaying the target content defined for the tile when the tile is tapped. Note that any links displayed dynamically within the tile are not disabled. The default value is False.

This property corresponds to the Disable Main Hotspot field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

DisplayMode property: ImageTile class

Description

Use the DisplayMode property to set or return a number value representing how the target transaction or content appears once a user taps the tile. The default value is 0.

This property corresponds to the Display In field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Options are:

Numeric Value	Description
0	Target content appears in the current browser window. Note: This is the default value.
1	Target content appears in a new tab in the browser.
2	Target content appears in a modal window.
3	Target content appears in the NavBar.

EventName property: ImageTile class

Description

Use the EventName property to set or return a string value representing the event name to subscribe to a push notification event defined on the server. Subscribing to an event allows the tile content to be updated by the event.

This property corresponds to the Event Name field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Related Topics

- Fluid User Interface Developer's Guide: Understanding the Push Notification Framework
- Fluid User Interface Developer's Guide: Defining Events

Height property: ImageTile class

Description

Use the Height property to set or return a number value representing the height of the tile. The default dimensions of a tile are 1 tile unit by 1 tile unit. Tiles up to 8x8 are supported. The default value is 1.

This property corresponds to the Height field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

ImageName property: ImageTile class

Description

Use the ImageName property to set or return a string value representing the image name of an SVG image from the image catalog. This SVG image is displayed on the tile.

Important

For an instantiation of the ImageTile class only, if this property is undefined, then the Save and Publish methods will fail.

This property corresponds to the Image Name field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Related Topics

- [Publish method: ImageTile class](#)
- [Save method: ImageTile class](#)

IsAuthorAccess property: ImageTile class

Description

Use the IsAuthorAccess property to return a boolean value indicating whether the creator of the content reference definition has access to the page regardless of other permissions assigned.

This property corresponds to the Author Access field, which is defined on the Security page of the target page content reference definition, and in Step 3 in Tile Wizard.

This property is effectively read-only.

IsAutosize property: ImageTile class

Description

Use the IsAutosize property to set or return a boolean value indicating whether to allow the fluid content to dynamically resize itself based on the size of the content. The default value is False.

This property corresponds to the Autosize field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

IsInteractive property: ImageTile class

Description

Use the IsInteractive property to set or return a boolean value indicating whether to display the fluid content as interactive, which allows users to enter data or click buttons within the fluid content. Since interactive fluid content require more resources than non-interactive ones, select this option only as needed. The default value is False.

This property corresponds to the Interactive field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

IsPublic property: ImageTile class

Description

Use the IsPublic property to return a boolean value indicating whether all users have access to the page regardless of other permissions assigned.

This property corresponds to the Public field, which is defined on the Security page of the target page content reference definition, and in Step 3 in Tile Wizard.

This property is effectively read-only.

IsPublished property: ImageTile class

Description

Use the IsPublished property to return a boolean value indicating whether this tile definition has been published.

This property is read-only.

Related Topics

- [ImageTile Class Methods](#)
In this section, the ImageTile class methods are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these methods are also inherited by and apply to the FreeTextTile class.

IsResizable property: ImageTile class

Description

Use the IsResizable property to set or return a boolean value indicating whether to allow the tile to be redisplayed at the specified alternate dimensions. The default value is False.

This property corresponds to the Resizable field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Example

```
If &t1.IsResizable Then
    &t1.AlternateHeight = 2;
    &t1.AlternateWidth = 2;
End-If;
```

Related Topics

- [AlternateHeight property: ImageTile class](#)
- [AlternateWidth property: ImageTile class](#)

ModalParameters property: ImageTile class

Description

Use the ModalParameters property to set or return the custom modal options as a string value.

This property corresponds to the Modal Parameters field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Related Topics

- Fluid User Interface Developer's Guide: Modal Options

Name property: ImageTile class

Description

Use the Name property to return a string value representing the ID for this tile definition, which is specified when the ImageTile object is instantiated.

This property corresponds to the Tile Name field in Step 1 in Tile Wizard; it is not used in the content reference link definition.

This property is read-only.

Related Topics

- [ImageTile method: ImageTile class](#)

Owner property: ImageTile class

Description

Use the Owner property to set or return a string value representing the owner ID for the content reference link definition. The default value is "PPT" (PeopleTools).

This property corresponds to the Owner ID field, which is defined on the General page of the content reference link definition, and in Step 1 in Tile Wizard.

This property is read/write.

ParentFolder property: ImageTile class

Description

Use the ParentFolder property to set or return a string value of up to 30 characters representing the ID of the parent folder for the content reference link definition in the tile repository. This parent folder must be a subfolder of the Fluid Pages (PORTAL_GROUPLETS) folder. The default value is "PTFL_PEOPLETOOLS" (PeopleSoft Applications).

This property corresponds to the Parent Folder field, which is defined on the General page of the content reference link definition, and in Step 3 in Tile Wizard.

This property is read/write.

Related Topics

- Portal Technology: Understanding Tile Definitions and the Tile Repository

Permissions property: ImageTile class

Description

Use the Permissions property to return an ApiObject representing a collection the permission lists from the target page content reference definition.

These permission lists are visible on the Security page of the target content reference definition and the Security page of the content reference link definition, and are displayed in Step 3 in Tile Wizard.

This property is read-only.

RefreshFrequency property: ImageTile class

Description

Use the RefreshFrequency property to set or return a number value representing the time in seconds to set as an automatic refresh period for dynamic content on a tile. When the timer limit has been reached, the system re-draws the tile so that it displays the current data, such as in the case with chart.

This property corresponds to the Refresh Timer field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Roles property: ImageTile class

Description

Use the Roles property to return an ApiObject representing a collection the roles from the target page content reference definition.

These roles are visible on the Security page of the target content reference definition and the Security page of the content reference link definition, and are displayed in Step 3 in Tile Wizard.

This property is read-only.

ShowingSequence property: ImageTile class

Description

Use the ShowingSequence property to set or return a number value representing the sequence number for the content reference link. The default value is 9999.

This property corresponds to the Sequence number field, which is defined on the General page of the content reference link definition, and in Step 3 in Tile Wizard.

This property is read/write.

TargetCrefName property: ImageTile class

Description

Use the TargetCrefName property to set or return a string value representing the portal object name of the target page definition.

Important

If this property is undefined, then the Save and Publish methods will fail.

This property corresponds to the Name field of the Target Information group box, which is defined on the General page of the content reference link definition, and in Step 3 in Tile Wizard.

This property is read/write.

Example

```
&t1.TargetCrefName = "PT_CHANGE_PASSWORD_GBL";
```

Related Topics

- [Publish method: ImageTile class](#)
- [Save method: ImageTile class](#)

Title property: ImageTile class

Description

Use the Title property to set or return a string value of up to 30 characters representing the title for the tile.

Important

If this property is undefined, then the Save and Publish methods will fail.

This property corresponds to the Label field of the Link Information group box, which is defined on the General page of the content reference link definition, and in Step 1 in Tile Wizard.

This property is read/write.

Example

```
&t1.Title = "My Tile";
```

Related Topics

- [Publish method: ImageTile class](#)
- [Save method: ImageTile class](#)

UseInDashboard property: ImageTile class

Description

Use the UseInDashboard property to set or return a boolean value specifying whether this tile is listed when the Add Tile dialog box is accessed from dashboards. The default value is True.

This property corresponds to the Dashboard check box, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

UseInHomePage property: ImageTile class

Description

Use the UseInHomePage property to set or return a boolean value specifying whether this tile is listed when the Add Tile dialog box is accessed from homepages. The default value is True.

This property corresponds to the Homepage check box, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

UseInNavBar property: ImageTile class

Description

Use the UseInNavBar property to set or return a boolean value specifying whether this tile is listed when the Add Tile dialog box is accessed from the NavBar. The default value is True.

This property corresponds to the NavBar check box, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

Width property: ImageTile class

Description

Use the Width property to set or return a number value representing the width of the tile. The default dimensions of a tile are 1 tile unit by 1 tile unit. Tiles up to 8x8 are supported. The default value is 1.

This property corresponds to the Width field, which is defined on the Fluid Attributes page of the target page content reference definition, and in Step 4 in Tile Wizard.

This property is read/write.

FreeTextTile Class Methods

In this section, the FreeTextTile constructor method is described. Because the FreeTextTile class is an implementation of the ImageTile class, the methods and properties of the ImageTile class are inherited by and apply to the FreeTextTile class. In particular, refer to the documentation on these methods of the ImageTile class:

- [AddToHomePage method: ImageTile class](#)
- [Delete method: ImageTile class](#)
- [Publish method: ImageTile class](#)
- [Save method: ImageTile class](#)

Related Topics

- [ImageTile Class Properties](#)

In this section, the ImageTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these properties are also inherited by and apply to the FreeTextTile class.

FreeTextTile method: FreeTextTile class

Syntax

```
FreeTextTile(TILE_NAME)
```


Description

The FreeTextTile constructor is automatically invoked when you instantiate an object of the FreeTextTile class. Because the FreeTextTile class is a subclass of the ImageTextTile class, this method also instantiates an object of the superclass before initializing the FreeTextTile object.

Parameters

Parameter	Description
<i>TILE_NAME</i>	Specifies the ID for the tile as string value of up to 30 characters. This represents the Tile Name of the tile definition in Tile Wizard. Note: The ID cannot include spaces or special characters and must not begin with a number.

Returns

An ImageTile object.

Example

```
import PTGP_APPCLASS_TILE:API:FreeTextTile;

Local PTGP_APPCLASS_TILE:API:FreeTextTile &t2 = create
PTGP_APPCLASS_TILE:API:FreeTextTile("MY_TILE2");

/* Set required properties */
&t2.Title = "My Text Tile";
&t2.TargetCrefName = "PT_SC_PERS_DICT_FL_GBL"; /* My Dictionary */
&t2.Content = "My tile <i>content.</i>";

/* Invoke methods defined in the base class. */
&t2.Save(); /* For a new tile definition,
a save is required. */
&t2.Publish();
```

Related Topics

- [ImageTile method: ImageTile class](#)

FreeTextTile Class Properties

In this section, the FreeTextTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, the properties and methods of the FreeTextTile class are inherited by and apply to the FreeTextTile class.

Related Topics

- [ImageTile Class Properties](#)
In this section, the ImageTile class properties are presented in alphabetical order. Because the FreeTextTile class is an implementation of the ImageTile class, these properties are also inherited by and apply to the FreeTextTile class.

Content property: FreeTextTile class

Description

Use the Content property to set or return a string value representing the HTML-formatted text to be displayed on the tile.

You can use the following HTML tags only: <h1>, <h2>, <h3>, <h4>, <h5>, <h6>,
, <p>, , <i>, and . Within the tag, src, width, height, and alt are allowable attributes. Use the %Image meta-HTML element to identify an image to include within the HTML:

```

```

! Important

If this property is undefined, then the Save and Publish methods will fail.

This property is read/write.

Example

```
&t2.Content = "My tile <i>content.</i>";
```

Related Topics

- [Publish method: ImageTile class](#)
- [Save method: ImageTile class](#)

TileAppFilter Class Methods

In this section, the TileAppFilter class methods are presented in alphabetical order.

IsTileVisible method: TileAppFilter class

Syntax

```
IsTileVisible(&CREF)
```

Description

Implement the IsTileVisible method to define application business logic that determines whether a tile is displayed or hidden on a fluid homepage or fluid dashboard.

The use of the IsTileVisible method has the following limitations:

- In a cluster environment, the TileAppFilter.IsTileVisible logic is only available if you are logged in to the node where the tile is defined directly. If the tile is added as a remote node, it will behave like a conventional tile, and the TileAppFilter.IsTileVisible logic is not executed.

- In fluid homepages, the TileAppFilter.IsTileVisible logic is only executed once during a login session when the tile is initially loaded (typically at login) as the homepages are cached. However, dashboards evaluate the TileAppFilter.IsTileVisible logic every time the dashboard is loaded.

Parameters

Parameter	Description
<i>&CREF</i>	Specifies the portal object for the tile definition as an already instantiated ApiObject object.

Returns

A boolean value:

- True if the tile is to be displayed.
- False if the tile is hidden and not to be displayed.

Example

```
method IsTileVisible
  /+ &cref as ApiObject +/
  /+ Returns Boolean +/
  /+ Extends/implements PTGP_APPCLASS_TILE:API:TileAppFilter.IsTileVisible +/
  /* Application-specific logic to hide or show a tile. */
  If IsUserInPermissionList("PTPT1000", "PTPT1600") And
    &cref.Name <> "PORTAL_ROOT_OBJECT" Then
    Return True;
  Else
    Return False;
  End-If;
end-method;
```

Related Topics

- [Content Reference Class Properties](#)
In this section, we discuss the Content Reference class properties. The properties are discussed in alphabetical order.
- [Content Reference Class Methods](#)
In this section, we discuss the Content Reference class methods. The methods are discussed in alphabetical order.
- Portal Technology: Hiding or Displaying Tiles Using an Application Class

TransformData Class

Understanding the TransformData Class

When Integration Broker invokes a Application Engine transform program, it inserts the message content into a PeopleCode system variable, %TransformData, which remains in scope throughout the Application Engine program. Each program step can access the variable in turn and modify its content, which then becomes available to the next step.

In the Application Engine program, XSLT steps and PeopleCode steps access %TransformData differently:

- In XSLT, the data is automatically made available to your program. The XSLT program is literally a presentation of the output structure and data, which includes XSL tags that reference, process, and incorporate the input data into the output structure. There's no need to explicitly refer to %TransformData, which automatically receives the interpreted result of the XSLT step.
- In PeopleCode, use the PeopleCode %TransformData system variable to access the TransformData object. You access the XML data as the XmlDocument property of the TransformData object, which you then assign to an XmlDocument object and process normally. Because the XmlDocument object is a reference to the data portion of %TransformData, your modifications are automatically passed back to the system variable.

Related Topics

- Integration Broker: Understanding Filtering, Transformation, and Translation
- PeopleCode Language Reference: %TransformData system variable

Creating a TransformData Object

A TransformData object is returned from the system variable %TransformData. You cannot create a TransformData object directly.

When Integration Broker invokes a Application Engine transform program, it inserts the message content into the %TransformData system variable.

TransformData Class Properties

In this section, the TransformData class properties are presented in alphabetical order.

DestMsgName property: TransformData class

Description

This property returns the name of the message at the receiving node as a string.

This property is read-only.

DestMsgVersion property: TransformData class

Description

This property returns the name of the message version at the receiving node as a string.

This property is read-only.

DestNode property: TransformData class

Description

This property returns the name of the node receiving the message as a string.

This property is read-only.

RejectTransform property: TransformData class

Description

Use this property to terminate asynchronous transactions (asynchronous physical transformations only).

Use the following system constant to set this property: %IB_Transform_Rejected.

If this property is set within a transform program for an inbound asynchronous transaction, the result will be that no subscription contract is created. On the Service Operation Monitor Details page for the transaction, an informational message will be part of the error message link indicating that the transaction was terminated.

If this property is set within a transform program for an outbound asynchronous transaction, the publication contract status will be updated to done. The outbound message will not be sent. In addition, on the Service Operation Monitor Details page for the transaction, an informational message will be part of the error message link indicating that the transaction was terminated.

This property is read/write.

RoutingDefnName property: TransformData class

Description

This property returns the routing definition name as a string. You can use this property to retrieve the connector's routing properties.

This property is read-only.

Related Topics

- [LoadConnectorPropFromRouting method: IBInfo class](#)

SourceMsgName property: TransformData class

Description

This property returns the name of the message at the sending node as a string.

This property is read-only.

SourceMsgVersion property: TransformData class

Description

This property returns the name of the message version at the sending node as a string.

This property is read-only.

SourceNode property: TransformData class

Description

This property returns the name of the node sending the message as a string.

This property is read-only.

Status property: TransformData class

Description

Use this property to communicate the success or failure of the transform program step to Integration Broker. Use the following values to set this property:

Integer Value	System Constant	Description
0 (default)	—	Indicates success.
1	—	Indicates that the message failed a filtering step.
2	%IB_Transform_Error	Indicates that an error occurred.

This property is read/write.

Related Topics

- Integration Broker: Understanding Filtering, Transformation, and Translation

XmlDoc property: TransformData class

Description

This property contains the XML message data.

You can assign this to an XmlDoc object and process the data using the XmlDoc class methods and properties.

This property is read/write.

Related Topics

- [Understanding XmlDoc Classes](#)
The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDoc class is used to create and manipulate XML data.

Tree Classes

Understanding Tree Classes

Using the tree classes in your PeopleCode, you have access to all the functionality of PeopleSoft Tree Manager. Your application should instantiate the appropriate tree objects when it must work with the tree system database data, call the appropriate methods and properties, then close the objects when it is finished.

Creating or deleting a tree *object* does not create or delete tree system database information. You must call the method for that tree object directly to create or delete database information, that is, the Create or Delete method.

One instance of a tree or tree structure object can be created to work on multiple database entities. However, only one tree or tree structure can be open at a time. If you open a Tree before closing the one that's currently open, you receive an error. You must explicitly close a tree or tree structure (using the Close method) before you try to open a second one.

All of the classes, and most of the properties and methods that make up the Tree Classes have a GUI representation in PeopleSoft Tree Manager. This document assumes that the reader is familiar with PeopleSoft Tree Manager.

The following classes make up the tree classes:

- Branch Collection
- Leaf
- Level
- Level Collection
- Node
- Tree
- Tree Structure

With most of the classes of objects in PeopleTools, when you use a *Getxxx* method, you are fully instantiating an object. However, for the tree class, when you use *GetTree* (from the Session object), you get a closed tree. A closed tree is a tree object with just the key fields filled in. The rest of the data is not present. To open the tree, you must use the *Open* method. Working with closed trees can improve your performance. The same applies to a tree structure: it's closed when you get it from the Session object, and you must open it before you can access its properties or change it.

There aren't any built-in functions for the tree classes: objects are instantiated from identifiers, from other objects, or from a Session object.

Using the *GenerateTree* function, you can produce a GUI representation of a tree in the PeopleSoft Pure Internet Architecture.


Related Topics

- PeopleCode Language Reference: *TreeDetailInNode* function

- [Understanding Session Class](#)
PeopleTools provides a family of APIs for external access into the PeopleSoft system. The Session class is the root of the APIs. It controls access to the PeopleSoft system, controls the environment, and enables you to do error handling for all APIs from a central location.
- PeopleCode Developer's Guide: Using the GenerateTree Function
- Tree Manager: Understanding Types of Trees

Relationships Between Different Tree Classes

The following diagram shows the tree classes and their relationships. Objects at the tip of the arrowhead are accessed or created from the object at the left of the arrowhead. Squares indicate objects. Ovals indicate collections.

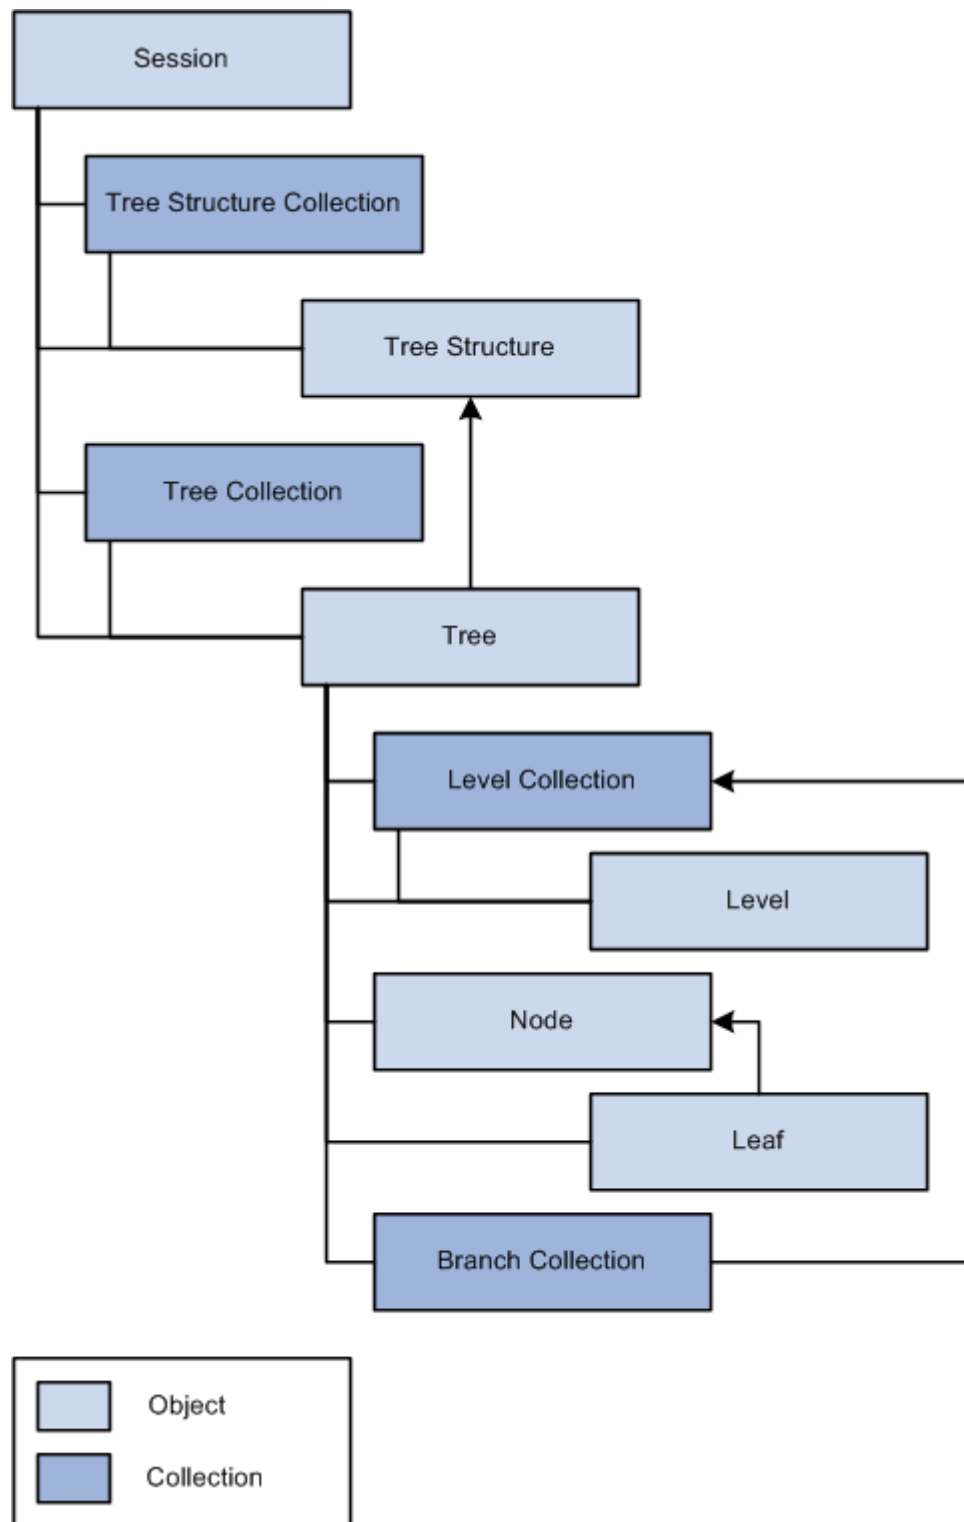

- From the session object, you can get identifiers for a tree or a tree structure.
- From the tree object, you can instantiate a tree, a tree structure, a branch collection, a leaf, a node, and a level collection.
- From the level collection object, you can instantiate a level object.
- From the branch collection object, you can get an identifier for a branch.

- From the node object, you can instantiate a leaf object or a node object.
- From the leaf object, you can instantiate a leaf object or a node object.

Collections in the Tree Classes

A *collection* is a set of similar things, like a group of already existing branches or levels. Like everything else in the tree classes, collections have a GUI representation. For example, when you find an existing branch from PeopleSoft Tree Manager, you get a dialog that lets you select the branches you want.

The following screen image is an example of different levels of collections in the Tree classes. And the dialog box data is represented in PeopleCode as the *tree level collection*.

Tree Levels

Tree Name: QE_ACCOUNTS

Tree Levels		
Customize Find View All First 1-9 of 15 Last		
Level Name	Description	View Detail
LEVEL 1	LEVEL 1	View Detail
LEVEL 2	LEVEL 2	View Detail
LEVEL 3	LEVEL 3	View Detail
LEVEL 4	LEVEL 4	View Detail
LEVEL 5	LEVEL 5	View Detail
LEVEL 6	LEVEL 6	View Detail
LEVEL 7	LEVEL 7	View Detail
LEVEL 8	LEVEL 8	View Detail
LEVEL 9	LEVEL 9	View Detail

The following collections are part of the tree classes:

- Branch collection
- Level collection

Error Handling With Trees

The tree classes log descriptive information regarding errors and warnings to the PSMessages collection, instantiated from a session object.

In your program, use the PSMessages collection to identify and report to the user any errors that are encountered during processing.

The tree classes log errors "interactively", that is, as they happen. For example, suppose you had created a new tree, and were setting the effective date using the effective date property (EffDt). If you used an invalid value for the effective date, the error would be logged in the PSMessages collection as soon as you set the value, not when you saved the tree.

When you want to check for errors depends on your application. However, if you check for errors after every assignment, you may see a performance degradation.

One way to check for errors is to check the number of messages in the PSMessages collection, using the Count property. If the Count is 0, no error or warning messages have been logged to the PSMessages collection.

```
Local ApiObject &MYSESSION;
Local ApiObject &ERRORCOL;
Local ApiObject &TREE, TREELIST;

&MYSESSION = %Session;
If &MYSESSION Then
    /* connection is good */
    &MyTree = &Session.GetTree();
    /* open a tree */
    &TreeReturn = &MyTree.Open("", "", "PERSONAL_DATA", "1999-06-01",
    "", true);
    /* Do error checking */
    &ERRORCOL = &MYSESSION.PSMessages;
    If (&ERRORCOL.Count <> 0) Then
        /* errors occurred - do processing */
    Else
        /* no errors */
    End-If;
    Else
        /* do processing for no connection */
    End-If;
```

You can also do an error check based on the return value of your API calls

```
If ALL(&TreeReturn) then
    /* processing errors */
End-if;
```

Related Topics

- [Error Handling](#)
The session object handles error processing for all the APIs, such as Component Interfaces, the Query API, and so on. From the session object, you can check if there have been any errors.

Leaves and Nodes Insert Verification

InsertChildLeaf, InsertSibNode, InsertChildNode, and so on, can return False or a Null object reference, depending upon the type of error encountered. You may want to declare references to new leaves or nodes as type ANY until after you verify they were actually created. You can do this by using the None or All PeopleCode functions to determine whether a valid Leaf or Node Object was created. If a Leaf or Node object was created ALL() returns True and None() returns False.

```
&NewLeaf = &RootNode.InsertChildLeaf("8000", "8999");
If NONE(&NewLeaf) Then
    /* Leaf not inserted, do error processing */
    &Messages = &Session.PSMessages;
    If &Messages.WarningPending Then
        /* do error processing */
```

```
End-if;  
End-if;
```

Related Topics

- PeopleCode Language Reference: None function
- PeopleCode Language Reference: All function

Restrictions on Trees When Used as a SmartNavigation Data Source

Note

SmartNavigation has been desupported. This information has been retained for backward compatibility only.

When a tree is used as a SmartNavigation data source, the values of several tree-specific properties are passed to the SmartNavigation application via URL. Certain characters are inappropriate for use in a URL and must be avoided. When using a tree as a SmartNavigation data source, do not use any of the following characters in the tree name, setID, user key value, and tree branch values:

pound (#)	percent (%)	dollar (\$)
ampersand (&)	plus (+)	comma (,)
forward slash/virgule (/)	colon (:)	semi-colon (;)
equals (=)	question mark (?)	at symbol (@)
space ()	quotation marks (")	less than symbol (<)
greater than symbol (>)	left curly brace { }	right curly brace { }
vertical bar/pipe ()	backslash (\)	caret (^)
tilde (~)	left square bracket ([)	right square bracket (])
grave accent (`)		

When using Tree class methods such as Copy, Create, Rename, SaveAs, SaveAsDraft, and others, take care to avoid using these invalid characters in the values for the tree name, setID, user key value, and tree branch.

Data Types for Tree Objects

All tree objects, that is, trees, tree structures, nodes, levels, and so on, are declared as type ApiObject. For example:

```
Local ApiObject &MYTREE;
```

```
Global ApiObject &MYNODE;
```

All tree objects can be declared as Local, Component or Global.

Scope of the Tree Objects

All tree objects, that is, trees, tree structures, nodes, leaves, and so on, can *only* be instantiated from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in an application class, Application Engine PeopleCode, record field PeopleCode, and so on.

You can instantiate a tree or tree structure object only from a session object. You have to instantiate the session object, and connect to the database, before you can instantiate a tree or tree structure.

```
Local ApiObject &TREELIST;
Local ApiObject &MYSESSION;
&MYSESSION = %Session;
If &MYSESSION Then
    /* connection is good */
Else
    /* do error processing */
End-if;
```

Note

Tree Classes are accessible only through PeopleCode.

Tree Classes Implementation

You will often want to create a new tree. The following procedure discusses this action in more detail.

The TreeMover Application Engine program uses the Tree API (and File Layouts) for importing a tree from a flat file or exporting a tree to a flat file.

To create a new tree:

In this example, you are creating a new tree based on an existing tree structure. The following is the complete code sample: the steps explain each line.

```
Local ApiObject &Session;
Local ApiObject &TreeList, &MyTree;
Local ApiObject &LvlColl;
&Session = %Session;
&MyTree = &Session.GetTree();
    /* create new tree */

If All(&MyTree) Then
    &TreeReturn = &MyTree.Create("", "", "PERSONAL_DATA2", "1999-06-01",
"PERSONAL_⇒
DATA");
    If &TreeReturn <> 0 then
        /* check PSMessages collection */
    End-if;
```

```

    &MyTree.description = "test tree";
    /* add level */
    &LvlColl = &MyTree.levels;
    &Level = &LvlColl.add("FIRST LVL");
    &Level.description = "First Level";
    /* add root node */
    &RootNode= &MyTree.insertroot("00001");
If ALL(&RootNode) Then
    /* insert a leaf */
    &NewLeaf = &RootNode.InsertChildLeaf("8000", "8999");
    /* save new tree */
    &RSLT = &MyTree.Save();
    /* Do error checking */
    If &RSLT <> 0 Then
        /* errors occurred = do error checking */
        &ERRORCOL = &Session.PSMessages;
        For &I = 1 To &ERRORCOL.count
            /* do error processing */
            End-For;
        Else
            /* no errors - saved correctly - do other processing */
        End-If;
    End-if;

End-if;

```

1. Get a session object.

Before you can get a tree, you have to get a session object. The session controls access to the tree, provides error tracing, enables you to set the runtime environment, and so on. Use the %Session system variable to return a reference to the current PeopleSoft session.

```
&Session = %Session;
```

2. Get a tree object.

Use the GetTree method specifying a null value (" ") to return a closed tree object.

```
&MyTree = &Session.GetTree();
```

3. Create the Tree.

The Create method creates a new tree with the name PERSONAL_DATA2. To ensure that you have a valid tree, use the All built-in function. Description is a required property (if you don't specify something for Description you cannot save the tree.)

```

&TreeReturn = &MyTree.Create("", "", "PERSONAL_DATA2", "1999-06-01",
"PERSONAL_⇒
DATA");
&MyTree.description = "test tree";

```

4. Add a level.

To add a level, you have to instantiate a level collection. Although there aren't any levels in the tree, you can still access this collection. Use the Add method with the level collection to

add a new level. Remember, the level name must be 8 characters or less. Description is a required property (if you don't specify something for Description you cannot save the tree.)

```
&LvlColl = &MyTree.levels;
&Level = &LvlColl.add("FIRST LVL");
&Level.description = "First Level";
```

5. Add the root node.

Because this is a new tree, you must first add the root node.

```
&RootNode = &MyTree.insertroot("00001");
```

6. Add a leaf.

To add a new leaf, you must have a reference to the parent node object. Using the All built-in function ensures that there is a root node before you try to insert the leaf with the InsertChildLeaf method.

```
If ALL(&RootNode) Then
    &NewLeaf = &RootNode.InsertChildLeaf("8000", "8999");
```

7. Save the tree.

When you execute the Save method, the new tree is saved to the database.

```
&RSLT = &MyTree.Save();
```

Note

If you're running the tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

8. Check for errors.

You can check if there were any errors using the PSMessages property on the session object.

```
If All (&RSLT) Then
    /* errors occurred = do error checking */
    &ERRORCOL = &Session.PSMessages;
    For &I = 1 To &ERRORCOL.count
        /* do error processing */
    End-For;
Else
    /* no errors - saved correctly - do other processing */
End-If;
```

If there are multiple errors, all errors are logged to the PSMessages collection, not just the first occurrence of an error.

Note

If you've called the Tree API from an Application Engine program, all errors are also logged in the application engine error log tables.

Related Topics

- Tree Manager: Understanding TreeMover

Tree Classes Reference

This section provides a reference to the following topics:

- Session class methods in the tree API.
- Branch collection.
- Leaf class.
- Level collection.
- Level class.
- Node class.
- Tree class.
- Tree structure class.

Session Class Methods

Tree Classes don't have any built-in functions. Instead, they're instantiated from the Session Class.

In this section, we discuss the Session class methods. The methods are discussed in alphabetical order.

GetTree method: Session class

Syntax

```
GetTree()
```

Description

The GetTree method returns a closed tree object. Before you can use some of the methods or any of the properties, you must use the Open method to open a tree object.

Parameters

None.

Returns

A reference to a closed tree object.

Example

To create a new tree, use the following:

```
&MYTREE = %Session.GetTree();  
&MYTREE.Create("", "", "PERSONAL_NEW", "05-05-1997", "PERSONAL_DATA");
```

To determine if a tree already exists in the database, use the following code:

```
&MYTREE = %Session.GetTree();  
If &MYTREE.Exists("", "", "PERSONAL_OLD", "05-05-1997", "PERSONAL_DATA") = 0  
then  
    /* Do processing */  
End-If;
```

To open an existing tree, use the following code:

```
&MYTREE = %Session.GetTree();  
&MYTREE.Open("", "", "PERSONAL_OLD", "05-05-1997", "PERSONAL_DATA", True);
```

GetTreeStructure method: Session class

Syntax

```
GetTreeStructure()
```

Description

The GetTreeStructure method returns a closed tree structure object. Before you can use some of the methods or any of the properties, you must use the Open method to open the tree structure object.

Branch Collection

A branch collection is returned from the Branches property, used with an open tree object.

```
&MYBRANCHCOLL = &MYTREE.Branches;
```

&MYTREE must be a branched tree. To verify whether a tree is branched, you can check the value of the IsBranched property of a tree object (Boolean value: True or False.)

See [Branches property: Tree class](#).

Branch Collection Property

In this section, we discuss the Branch collection properties. The properties are discussed in alphabetical order.

Count property: Branch collection

Description

Returns the number of branches for the branch collection object.

Leaf Class

Leaf objects are instantiated from other tree classes as follows:

- From a tree object with the FindLeaf method.
- From a node object with the FirstChildLeaf property.
- From another leaf object with the NextSib and PrevSib properties.

See [FindLeaf method: Tree class](#), [FirstChildLeaf property: Node class](#), [NextSib property: Leaf class](#), [PrevSib property: Leaf class](#).

Leaf Class Methods

In this section, we discuss the Leaf class methods. The methods are discussed in alphabetical order.

Cut method: Leaf class

Syntax

```
Cut()
```

Description

The Cut method cuts the leaf and puts it into a buffer (the clipboard.) You can then use the PasteSib method to add the leaf back as a sibling of a different leaf. You can also use the PasteChild node method to add the leaf back as a child of a different node.

You can only have one object at a time on the clipboard. If you cut another leaf or node, the leaf in the clipboard is overwritten.

Parameters

None.

Returns

A number; 0 if the cut is successful.

Related Topics

- [Cut method: Node class](#)
- [PasteSib method: Leaf class](#)
- [PasteChild method: Node class](#)

Delete method: Leaf class

Syntax

```
Delete()
```

Description

The Delete method deletes the leaf object executing the method *from the database*.

Returns

A number; 0 if the delete is successful.

Example

```
&MYLEAF = &MYTREE.FindLeaf("8200", "8300");  
&MYLEAF.Delete();
```

DeleteByRange method: Leaf class

Syntax

```
DeleteByRange(RangeFrom, RangeTo)
```

Description

The DeleteByRange method deletes the specified leaf object from the database. The leaf specified by the parameters does *not* have to match the leaf executing the method. That is, if &MYLEAF is associated with a range 8200-8300, you can specify a different range with the DeleteByRange method. For example:

```
&MYLEAF = &MYTREE.FindLeaf("8200", "8300");  
/* some processing */  
&RET_VALUE = &MYLEAF.DeleteByRange("8400", "8500");
```

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the leaf to be deleted. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the leaf to be deleted. This parameter takes a string value.

Returns

A number; 0 if the delete is successful.

Example

```
&RET_VALUE= &MYLEAF.DeleteByRange("8400", "8500");
```

GenABNMenuElement method: Leaf class

Syntax

```
GenABNMenuElement()
```

Description**Note**

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to generate a single element for this tree leaf.

The element from this leaf and the elements from its sibling leaves and nodes are concatenated to form an HTML code fragment to be consumed by the portal.

Parameters

None.

Returns

A string representing the element for this tree leaf.

GenABNMenuElementWithImage method: Leaf class

Syntax

```
GenABNMenuElementWithImage(CREF_img_class_ID)
```

Description**Note**

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to generate a single element for this tree leaf using the specified custom CREF icon.

The element from this leaf and the elements from its sibling leaves and nodes are concatenated to form an HTML code fragment to be consumed by the portal.

Parameters

Parameter	Description
<i>CREF_img_class_ID</i>	Specifies the class ID for a custom CREF icon as a string. This class must be defined in a style sheet, and the style sheet must be assigned to the SmartNavigation folder. This is an optional parameter. To use the default CREF icon, you can omit this parameter or specify the null string "". However, to ensure forward compatibility, you must specify the null string.

Returns

A string representing the element for this tree leaf.

InsertDynSib method: Leaf class

Syntax

```
InsertDynSib()
```

Description

The InsertDynSib method inserts a dynamic leaf as a sibling leaf to the leaf object executing the method. The leaf is a *new* node.

A leaf object associated with the new leaf is returned. The new leaf is inserted as the next sibling leaf. If the new leaf isn't inserted successfully, the method returns Null.

Note

To insert a sibling leaf with a specific range, use the InsertSib method.

Parameters

None.

Returns

A reference to the new leaf. If this method fails, it returns either False or a Null object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the All or None functions.

Example

```
&NEWLEAF = &MYLEAF.InsertDynSib();
```

Related Topics

- [InsertSib method: Leaf class](#)

- PeopleCode Language Reference: All function
- PeopleCode Language Reference: None function

InsertSib method: Leaf class

Syntax

`InsertSib(RangeFrom, RangeTo)`

Description

The `InsertSib` method inserts a new leaf as a sibling leaf under the leaf currently executing the method. The leaf specified by the range parameters must be a *new* leaf. You receive an error if the leaf already exists.

A leaf object associated with the new leaf is returned. The new leaf is inserted as the next sibling leaf, although there is no explicit ordering of leaves: leaves take the order of the alphanumeric database sort on their range fields.

Note

To insert a dynamic sibling leaf (that is, without specifying a range) use the `InsertDynSib` method.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the new leaf. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the new leaf. This parameter takes a string value.

Returns

A leaf object associated with the new leaf. If this method fails, it returns either `False` or a `Null` object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the `All` or `None` functions.

Example

```
&NEWLEAF = &MYLEAF.InsertSib("10090", "10100");
```

Related Topics

- [InsertDynSib method: Leaf class](#)
- PeopleCode Language Reference: All function
- PeopleCode Language Reference: None function

LoadABNChart method: Leaf class

Syntax

```
LoadABNChart(&chart_rowset, &relactions_rowset)
```

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to load a child leaf of the current tree node into the SmartNavigation chart rowset and the component buffer.

Parameters

Parameter	Description
<i>&chart_rowset</i>	Specifies the SmartNavigation chart rowset. Typically, this is the rowset returned by the GetABNChartRowSet function.
<i>&relactions_rowset</i>	Specifies the related actions rowset. Typically, this is the rowset returned by the GetABNRelActnRowSet function.

Returns

None.

LoadABNChartOrdered method: Leaf class

Syntax

```
LoadABNChartOrdered(&chart_rowset, &relactions_rowset, order)
```

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to load a child leaf of the current tree node into the SmartNavigation chart rowset and the component buffer. The order for the leaf within its chart level is specified by this method.

Parameters

Parameter	Description
<i>&chart_rowset</i>	Specifies the SmartNavigation chart rowset. Typically, this is the rowset returned by the GetABNChartRowSet function.
<i>&relactions_rowset</i>	Specifies the related actions rowset. Typically, this is the rowset returned by the GetABNRelActnRowSet function.
<i>order</i>	Specify the order for the leaf as a number. Note: For a given chart level, all chart leaves must have a display order greater than zero.

Returns

None.

MoveAsChild method: Leaf class

Syntax

MoveAsChild(*Node*)

Description

The MoveAsChild method moves the leaf executing the method to a different node in the tree. The leaf becomes the first child leaf under the node, even though there is no explicit ordering of leaves: leaves take the order of the alphanumeric database sort on their range fields. The specified node becomes the new parent to the leaf.

Parameters

Parameter	Description
<i>Node</i>	Specify a node object. This parameter value must be an object, not a string or a name.

Note

To specify a node name, not a node object, use the MoveAsChildByName method.

Returns

A number; 0 if the move is successful.

Example

The following example moves leaf 8001 from node 10100 (old parent) to node 00001 (new parent)

```
&MY_LEAF = &MY_TREE.FindLeaf("8001", "8001");
&NEW_PARENT = &MY_TREE.FindNode("00001", "");
If &NEW_PARENT <> Null Then
    &RET_VALUE = &MY_LEAF.MoveAsChild(&NEW_PARENT);
End-If;
```

Related Topics

- [MoveAsChildByName method: Leaf class](#)

MoveAsChildByName method: Leaf class

Syntax

`MoveAsChildByName(NodeName)`

Description

The `MoveAsChildByName` method moves the leaf executing the method to a different node in the tree. The leaf becomes the first child leaf under the node, although there is no explicit ordering of leaves: leaves take the order of the alphanumeric database sort on their range fields. The specified node becomes the new parent to the leaf. The node specified by *NodeName* must be a valid node name.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of a node. <i>NodeName</i> must be a valid node for the existing tree. This parameter takes a string value.

Note

To specify a node object, not a node name, use the `MoveAsChild` method.

Returns

A number; 0 if the move is successful.

Example

The following example moves leaf 8001 from node 10100 (old parent) to node 00001 (new parent)

```
&MY_LEAF = &MY_TREE.FindLeaf("8001", "8001");
If &MY_LEAF <> Null Then
```

```
&RET_VALUE = &MY_LEAF.MoveAsChildByName("00001");  
End-If;
```

Related Topics

- [MoveAsChild method: Leaf class](#)

MoveAsSib method: Leaf class

Syntax

```
MoveAsSib(Leaf)
```

Description

The MoveAsSib method moves the leaf executing the method to a new place in the tree. The current leaf becomes the next sibling leaf under the specified leaf object, although there is no explicit ordering of leaves: leaves take the order of the alphanumeric database sort on their range fields.

Parameters

Parameter	Description
<i>Leaf</i>	Specify a leaf object. This parameter value must be an object, not a string or a name.

Note

To specify a range, not a leaf object, use the MoveAsSibByRange method.

Returns

A number; 0 if the move is successful.

Example

```
&MYLEAF = &MYTREE.FindLeaf("8000", "8000");  
&MYLEAF2 = &MYTREE.FindLeaf("9000", "9000");  
&RET_VALUE = &MYLEAF.MoveAsSib(&MYLEAF2);
```

Related Topics

- [MoveAsSibByRange method: Leaf class](#)

MoveAsSibByRange method: Leaf class

Syntax

```
MoveAsSibByRange(RangeFrom, RangeTo)
```

Description

The MoveAsSibByRange method moves the leaf executing the method to a new place in the tree. The current leaf becomes the next sibling leaf under the specified leaf object.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the leaf that you want as the parent of the leaf executing the method. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the leaf that you want as the parent of the leaf executing the method. This parameter takes a string value.

Note

To specify a leaf object, not a range, use the MoveAsSib method.

Returns

A number; 0 if the move is successful.

Example

```
&MYLEAF = &MYTREE.FindLeaf("8000", "8000");  
&RET_VALUE = &MYLEAF.MoveAsSibByRange("9000", "9000");
```

Related Topics

- [MoveAsSib method: Leaf class](#)

PasteSib method: Leaf class

Syntax

PasteSib()

Description

The PasteSib method makes the leaf from the buffer (clipboard) a sibling to the leaf executing the method. You must use the Cut leaf method before you can paste a leaf.

You can have only one object at a time on the clipboard. If you cut another leaf or node, the leaf in the clipboard is overwritten.

Parameters

None.

Returns

A number; 0 if the paste is successful.

RefreshDescription method: Leaf class

Syntax

```
RefreshDescription(expand_range)
```

Description

Use this method to reload the tree leaf's description from the database.

Note

This method is currently supported for what is known as a single detail leaf. Do not use this method with ranged or dynamic leaves.

Parameters

Parameter	Description
<i>expand_range</i>	Specify a Boolean value; however, this parameter is currently ignored. Note: This parameter is reserved for future use.

Returns

A number: 0 if the refresh was successful.

Related Topics

- [Description property: Leaf class](#)

UpdateRanges method: Leaf class

Syntax

```
UpdateRanges(RangeFrom, RangeTo)
```

Description

The UpdateRanges method performs validation of edited ranges, updating as necessary.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the leaf that you updated. This parameter takes a string value.

Parameter	Description
<i>RangeTo</i>	Specify the ending range of the leaf you want updated. This parameter takes a string value.

Returns

A number; 0 if the update is successful.

Leaf Class Properties

In this section, we discuss the Leaf class properties. The properties are discussed in alphabetical order.

Description property: Leaf class

Description

Use this property to return the tree leaf's description as a string.

Note

This property is currently supported for what is known as a single detail leaf. Do not use this property with ranged or dynamic leaves.

This property is read-only.

Related Topics

- [RefreshDescription method: Leaf class](#)

DisplayLevelNumber property: Leaf class

Description

When using the Tree API to create a graphic representation of the tree (such as for HTML Tree Manager or other application pages) use this property to indicate the *display* level, that is, tell the user how many levels deep the leaf is. This is generally used for trees where levels aren't used and the LevelNumber property always returns 0. This property always returns a number.

This property is read-only.

Related Topics

- [LevelNumber property: Node class](#)

Dynamic property: Leaf class

Description

This property specifies whether the leaf has a dynamic range or a specified range. If you set this property to True, the leaf has a dynamic range. If this is a new leaf, and you do not set this property, the value is automatically set is False.

This property is read/write.

Related Topics

- [Tree Manager: Understanding Steps to Create Trees](#)

HasNextSib property: Leaf class

Description

This property returns True if the leaf has a next sibling, that is, it isn't the last leaf listed under the parent node.

This property is read-only.

HasPrevSib property: Leaf class

Description

This property returns True if the leaf has a previous sibling, that is, it isn't the first leaf listed under the parent node.

This property is read-only.

ImageName property: Leaf class

Description

This property sets the which image is used to display the leaf. This property takes a string value for the image name of the leaf.

This property is read/write.

IsChanged property: Leaf class

Description

This property returns True if the leaf has been edited or changed.

This property is read-only.

Example

```
If &MYLEAF.IsChanged Then
    &MYTREE.Save();
End-If;
```

IsCut property: Leaf class

Description

This property returns True if the leaf has been cut from the displayed tree. This property is generally used with the HTML Tree Manager.

This property is read-only.

IsDeleted property: Leaf class

Description

This property returns True if the leaf has been deleted from the tree but the tree hasn't been saved.

This property is read-only.

IsInserted property: Leaf class

Description

This property returns True if the leaf has been inserted as a new leaf in the tree but the tree hasn't been saved.

This property is read-only.

NextSib property: Leaf class

Description

This property returns a leaf object associated with the next sibling leaf. The next sibling of a leaf is the leaf appearing under the current leaf. If there is no next sibling and you try to assign it to a variable, you receive a runtime error.

This property is read-only.

Example

The following code traversed the leaves from top to bottom.

```
While &MYLEAF.HasNextSib
    &MYLEAF = &MYLEAF.NextSib;
    /* do some processing */
End-While;
```

Parent property: Leaf class

Description

This property returns a node object associated with the parent node for the leaf.

This property is read-only.

Example

```
&PARENTNODE = &MYLEAF.Parent;
/* do node processing with node object */
```

PrevSib property: Leaf class

Description

This property returns a leaf object associated with the previous sibling leaf. The previous sibling of a leaf is the leaf appearing above the current leaf. If there is no previous sibling and you try to assign it to a variable, you receive a runtime error.

This property is read-only.

Example

The following code traverses the leaves from bottom to top.

```
While &MYLEAF.HasPrevSib
    &MYLEAF = &MYLEAF.PrevSib;
    /* do some processing */
End-While;
```

RangeFrom property: Leaf class

Description

This property returns the starting range, as a string, of the leaf.

This property is read/write.

RangeTo property: Leaf class

Description

This property returns the ending range, as a string, of the leaf.

This property is read/write.

TreeBranchName property: Leaf class

Description

This property returns the branch name of the tree as a string if the tree is branched. If not branched, this property returns a blank string.

This property is read-only.

TreeEffDt property: Leaf class

Description

This property returns the effective date of the tree as a string if the tree is effective-dated. If not effective-dated, this property returns a blank string.

This property is read-only.

TreeName property: Leaf class

Description

This property returns the name of the tree as a string.

This property is read-only.

TreeSetId property: Leaf class

Description

This property returns the SetID of the tree as a string if the tree has a SetID. If the tree doesn't have a SetID, this property returns a blank string.

This property is read-only.

TreeUserKeyValue property: Leaf class

Description

This property returns the UserKeyValue of the tree as a string if the tree has a UserKeyValue. If the tree doesn't have a UserKeyValue, this property returns a blank string.

This property is read-only.

Level Collection

Level collection is instantiated from a tree object with the Levels property.

See [Levels property: Tree class](#).

Level Collection Methods

In this section, we discuss the Level Collection methods. The methods are discussed in alphabetical order.

Add method: Level collection

Syntax

Add(*LevelName*)

Description

The Add method adds a new level called *LevelName* to the database. The specified level must be a new level, that is, it cannot exist in the database. *LevelName* takes a string value.

Note

LevelName must be 8 characters or less.

If no levels currently exist in the tree, the level is added at the top level. If levels already exist in the tree, the new level is added as the last level. You can change the level number of a level using the *Number* property.

If the new level is the first level, the *AllValuesAudit* property is automatically set to *True*.

The new level is not added to the database until the tree is explicitly saved.

This method returns a reference to the new level object.

Related Links

[Number property: Level class](#), [AllValuesAudit property: Level class](#)

Item method: Level collection

Syntax

```
Item(LevelName, LevelNumber)
```

Description

The *Item* method returns a reference to the specified level in the level collection executing the method as an object. The *LevelName* parameter specifies the name of the level to access. This parameter takes a string value. The *LevelNumber* parameter specifies the number at which the level exists. This parameter takes a number value. For example, suppose your level collection contains the following levels, in this order:

1. CORPORATE
2. COMPANY
3. DIVISION
4. DEPARTMENT
5. BRANCH

You want to access the fourth level, DEPARTMENT. You would use the following code:

```
&MYLEVEL = &LVLCOLLECTION.Item("DEPARTMENT", 4);
```

Remove method: Level collection

Syntax

```
Remove()
```

Description

The Remove method deletes the current level from the database. You can use this method only after you have used the First, Next, or Item properties: otherwise the system doesn't know which level to delete from the tree. If no level has been indicated yet system tries to remove the last level. If the level to remove has nodes associated with it, the system doesn't remove the level. The rest of the levels in the collection after the deleted level are moved up in the list and renumbered so that the levels remain consecutively numbered.

Returns

A number; 0 if the level is successfully removed.

Level Collection Properties

In this section, we discuss the Level collection properties. The properties are discussed in alphabetical order.

Count property: Level collection

Description

Returns the number of levels for the level collection object.

First property: Level collection

Description

The First property returns a reference to the first level in the level collection executing the method as an open object.

Last property: Level collection

Description

The Last property returns a reference to the last level in the level collection executing the method as an open object.

Next property: Level collection

Description

The Next property returns a reference to the next level in the level collection executing the method as an open object. You can use this method only after you have used either the First or Item properties: otherwise the system doesn't know where to start in the tree.

Level Class

Level objects are instantiated from the level class collection object with the Item method or one of the following properties:

- First

- Last
- Next

See [Item method: Level collection](#), [First property: Level collection](#), [Last property: Level collection](#), [Next property: Level collection](#).

Level Class Methods

In this section, we discuss the Leaf class properties. The properties are discussed in alphabetical order.

Create method: Level class

Syntax

```
Create(LevelName, LevelNumber)
```

Description

Note

This method has been desupported. If you create a level using this method, there is no way of saving the level to the database. Use the Add level collection method instead.

Level Class Properties

In this section, we discuss the Level class properties. The properties are discussed in alphabetical order.

AllValuesAudit property: Level class

Description

This property specifies whether PeopleSoft Tree Manager permits nodes to skip over this level. To allow nodes to skip this level, specify this parameter as True. If you are creating a new level, and this level is the first level in a tree, this property is automatically set to True. If the level isn't the first level, this property is set to False by default..

This property is read/write.

Related Topics

- Tree Manager: Modifying Tree Definitions

Description property: Level class

Description

This property returns the description of the level.

This property is read/write.

Name property: Level class

Description

This property returns the name of the level.

This property is read/write.

Number property: Level class

Description

This property returns the number of the level.

Note

Though you can use this property to set the level of the number, you should not do so, as level numbers are automatically assigned when the level is inserted to the level collection using the Add method.

This property is read/write.

TreeBranchName property: Level class

Description

This property returns the branch name of the tree as a string if the tree is branched. If not branched, this property returns a blank string.

This property is read-only.

TreeEffDt property: Level class

Description

This property returns the effective date of the tree as a string if the tree is effective-dated. If not-effective dated, this property returns a blank string.

This property is read-only.

TreeName property: Level class

Description

This property returns the name of the tree as a string.

This property is read-only.

TreeSetId property: Level class

Description

This property returns the SetID of the tree as a string if the tree has a SetID. If the tree doesn't have a SetID, this property returns a blank string.

This property is read-only.

TreeUserKeyValue property: Level class

Description

This property returns the UserKeyValue of the tree as a string if the tree has a UserKeyValue. If the tree doesn't have a UserKeyValue, this property returns a blank string.

Node Class

Node objects are instantiated from other tree classes, as follows:

- From a tree object with the FindNode method.
- From a leaf object with the Parent property.
- From another node object with the FirstChildNode, NextSib, PrevSib, and Parent properties.

See [FindNode method: Tree class](#), [FirstChildNode property: Node class](#), [NextSib property: Node class](#), [PrevSib property: Node class](#).

See [Parent property: Leaf class](#).

See [Parent property: Node class](#).

Node Class Methods

In this section, we discuss the Node class methods. The methods are discussed in alphabetical order.

Branch method: Node class

Syntax

Branch()

Description

The Branch method branches the node executing this method, identifying all of its child nodes and leaves as part of that branch. *Branching* means taking a limb of a tree and creating another subtree to hold that limb. (Technically is it not creating a real tree.) The subtree is accessed through the Branches collection.

After you use the Branch method, you can no longer access the child nodes and leaves of the node that executed the method until you close the current tree, open the new branched tree, and find the node again. To unbranch the tree, use the Unbranch method.

Returns

A number; 0 if method is successful.

Example

```
&MYNODE = &MYTREE.FindNode("10900", "");  
&MYNODE.Branch();
```

Related Topics

- Tree Manager: Working with Tree Branches

Cut method: Node class

Syntax

```
Cut()
```

Description

The Cut method cuts the node executing the method and puts it into a buffer (the clipboard). You can then use the PasteSib method to add the node back as a sibling of a different node. You can also use the PasteChild node method to add the node back as a child of a different node.

You can have only one object at a time on the clipboard. If you cut another leaf or node, the node on the clipboard is overwritten.

Parameters

None.

Returns

A number; 0 if method is successful.

Delete method: Node class

Syntax

```
Delete()
```

Description

The Delete method deletes the node object executing the method *from the database*.

Returns

A number; 0 if method is successful.

DeleteByName method: Node class

Syntax

```
DeleteByName(NodeName)
```

Description

The DeleteByName method deletes the specified node from the database. The *NodeName* parameter takes a string value. The node specified by *NodeName* does not have to match the node executing the method. That is, if &MYNODE is associated with node 100200, you can specify a different node with the DeleteByName method. For example:

```
&MYNODE = &MYTREE.FindNode("100200", "");  
/* some processing */  
&MYNODE.DeleteByName("100300");
```

The node name specified by *NodeName* must be a valid node in the existing open tree object. If *NodeName* doesn't exist, you receive a runtime error.

Returns

A number; 0 if method is successful.

Expand method: Node class

Syntax

```
Expand(ExpandType)
```

Description

The Expand method gets the next level of nodes or leaves into memory from the selected node. What leaves or nodes get expanded depends on the *ExpandType*.

Parameters

Parameter	Description
<i>ExpandType</i>	Specifies which leaves or nodes get expanded. Values are:
Value	Description
0	Expand only nodes
1	Expand nodes and leaves
2	Expand only one level

Returns

A number; 0 if method is successful.

Example

```
If (&MYNODE.State = 2 AND &MYNODE.HasChildren);  
    /* if node is collapsed */  
    &MYNODE.Expand(2);  
End-if;
```

GenABNMenuElement method: Node class

Syntax

GenABNMenuElement(*initial_node*)

Description**Note**

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to generate a single element for this tree node.

The element from this node and any sibling nodes and leaves are concatenated to form an HTML code fragment to be consumed by the portal.

Parameters

Parameter	Description
<i>initial_node</i>	Specifies the initial chart node. Typically, this is returned directly by calling the GetABNInitialNode function.

Returns

A string representing the element for this tree node.

GenABNMenuElementWithImage method: Node class

Syntax

GenABNMenuElementWithImage(*initial_node*, *fldr_img_class_ID*, *CREF_img_class_ID*)

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to generate a single element for this tree node using the specified custom folder and CREF icons.

The element from this node and any sibling nodes and leaves are concatenated to form an HTML code fragment to be consumed by the portal.

Parameters

Parameter	Description
<i>initial_node</i>	Specifies the initial chart node. Typically, this is returned directly by calling the GetABNInitialNode function.
<i>fldr_img_class_ID</i>	Specifies the class ID for a custom folder icon as a string. This class must be defined in a style sheet, and the style sheet must be assigned to the SmartNavigation folder. This is an optional parameter. To use the default folder icon, you can omit this parameter or specify the null string "". However, to ensure forward compatibility, you must specify the null string.
<i>CREF_img_class_ID</i>	Specifies the class ID for a custom CREF icon as a string. This class must be defined in a style sheet, and the style sheet must be assigned to the SmartNavigation folder. This is an optional parameter. To use the default CREF icon, you can omit this parameter or specify the null string "". However, to ensure forward compatibility, you must specify the null string.

Returns

A string representing the element for this tree node.

GenBreadCrumbs method: Node class

Syntax

GenBreadCrumbs(*list*)

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Call the GenBreadCrumbs method from the requested node to generate an HTML code fragment that will be rendered in the browser as breadcrumbs.

The elements in the input string are created by the GenRelatedActions and GenABNMenuElement methods of the Node class, and the GenABNMenuElement method of the Leaf class.

Parameters

Parameter	Description
<i>list</i>	Specifies the list of elements as a string.

Returns

A string with the elements for the bread crumbs for this tree node appended.

GenRelatedActions method: Node class

Syntax

```
GenRelatedActions()
```

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to generate the list of elements for the related actions menu for the current tree node. Call this function before calling GenABNMenuElement for the same node. The elements from this function, from this node, from any child nodes and leaves traversed, and from the parent tree nodes are concatenated to form an HTML code fragment to be consumed by the portal.

Parameters

None.

Returns

A string representing the elements for the related actions for this tree node.

InsertChildLeaf method: Node class

Syntax

`InsertChildLeaf(RangeFrom, RangeTo)`

Description

The `InsertChildLeaf` method inserts a new leaf (as specified by the range parameters) under the node object executing the method.

A leaf object associated with the new leaf is returned.

The new leaf is inserted as the child of the current node, although there is no explicit ordering of leaves: leaves take the order of the alphanumeric database sort on their range fields.

Note

You must specify a range with this method. To insert a dynamic range leaf (that is, one with no range) use the `InsertDynChildLeaf` method.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the new leaf. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the new leaf. This parameter takes a string value.

Returns

A leaf object associated with the new leaf. If this method fails, it returns either `False` or a `Null` object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the `All` or `None` functions.

Example

```
&NEWLEAF = &MYLNODE.InsertChildLeaf("10090", "10100");
```

```
If None(&NEWLEAF) Then  
    /* Error Processing */  
End-If;
```

Related Topics

- [InsertDynChildLeaf method: Node class](#)
- PeopleCode Language Reference: `All` function
- PeopleCode Language Reference: `None` function

InsertChildNode method: Node class

Syntax

```
InsertChildNode(NodeName)
```

Description

The InsertChildNode method inserts a new node (as specified by *NodeName*) as a child node under the node object executing the method. The node specified by *NodeName* must be a new node. You receive an error if the node already exists.

A node object associated with the new node is returned. If the new node isn't inserted successfully, the method returns False or Null.

Parameters

Parameter	Description
<i>NodeName</i>	Specify a name for the new node. This parameter takes a string value. <i>NodeName</i> must not already exist.

Returns

A reference to the new node. If this method fails, it returns either False or a Null object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the All or None functions.

Example

```
&NEUNODE = &MYNODE.InsertChildNode("100500");
```

```
If None(&NEUNODE) Then  
    /* Do error processing */  
End-If;
```

Related Topics

- PeopleCode Language Reference: All function
- PeopleCode Language Reference: None function

InsertChildRecord method: Node class

Syntax

```
InsertChildRecord(NodeName)
```

Description

The InsertChildRecord method inserts a new record (as specified by *NodeName*) as a node under the parent node executing this method. This method works only on trees that are Query Access Trees.

A node object associated with the new node is returned, otherwise this method returns False or Null.

Parameters

Parameter	Description
<i>NodeName</i>	Specify an existing record name. This parameter takes a string value. This record must not already be a node under the parent node (that is, a parent node can't have the same record as a child node more than once.)

Returns

A reference to the new node. If this method fails, it returns either False or a Null object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the All or None functions.

Example

```
&NEWMODE = &MYNODE.InsertChildRecord("PERSONAL_DATA");
```

```
If None(&NEWMODE) Then  
    /* Do error processing */  
End-if;
```

Related Topics

- PeopleCode Language Reference: All function
- PeopleCode Language Reference: None function

InsertDynChildLeaf method: Node class

Syntax

```
InsertDynChildLeaf()
```

Description

The InsertDynChildLeaf method inserts a dynamic leaf under the node object executing the method.

A leaf object associated with the new leaf is returned.

The new leaf is inserted as the child of the current node, although there is no explicit ordering of leaves.

Note

To insert a leaf with a specific range, use the InsertChildLeaf method.

Parameters

None.

Returns

A leaf object associated with the new leaf. If this method fails, it returns either False or a Null object reference, depending upon the type of error encountered. The best way to test whether the object was inserted is to test the result using either the All or None functions.

Example

```
&NEWLEAF = &MYLNODE.InsertDynChildLeaf();
```

```
If None(&NEWLEAF) Then  
    /* Do error processing */  
End-If;
```

Related Topics

- [InsertChildLeaf method: Node class](#)
- PeopleCode Language Reference: All function
- PeopleCode Language Reference: None function

InsertSib method: Node class

Syntax

```
InsertSib(NodeName)
```

Description

The InsertSib method inserts a new node (as specified by *NodeName*) as a sibling node to the node object executing the method. The node specified by *NodeName* must be a *new* node. You receive an error if the node already exists.

A node object associated with the new node is returned. If the new node isn't inserted successfully, the method returns Null.

Parameters

Parameter	Description
<i>NodeName</i>	Specify a name for the new node. This parameter takes a string value. <i>NodeName</i> must not already exist.

Returns

A reference to the new node. If this method fails, it returns False.

Example

```
&NEWNODE = &MYNODE.InsertSib("100500");
```

InsertSibRecord method: Node class

Syntax

```
InsertSibRecord(NodeName)
```

Description

The InsertSibRecord method inserts a new record (as specified by *NodeName*) as a sibling node of the parent node executing this method. This method works only on trees that are Query Access Trees.

A node object associated with the new node is returned, otherwise this method returns Null.

Parameters

Parameter	Description
<i>NodeName</i>	Specify an existing record name. This parameter takes a string value. This record must not already be a sibling node for the node executing the object (that is, a node can't have the same record as a node more than once.)

Returns

A reference to the new node. If this method fails, it returns False.

Example

```
&NEWNODE = &MYNODE.InsertSibRecord("PERSONAL_DATA");
```

LoadABNChart method: Node class

Syntax

```
LoadABNChart(&chart_rowset, &relactions_rowset, requested_node, initial_node)
```


Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to load the requested tree node into the SmartNavigation chart rowset and the component buffer.

Parameters

Parameter	Description
<i>&chart_rowset</i>	Specifies the SmartNavigation chart rowset. Typically, this is the rowset returned by the <code>GetABNChartRowSet</code> function.
<i>&relactions_rowset</i>	Specifies the related actions rowset. Typically, this is the rowset returned by the <code>GetABNRelActnRowSet</code> function.
<i>requested_node</i>	Specifies as a Boolean value whether the calling node is the requested node.
<i>initial_node</i>	Specifies the initial chart node. Typically, this is returned directly by calling the <code>GetABNInitialNode</code> function.

Returns

None.

LoadABNChartOrdered method: Node class

Syntax

```
LoadABNChartOrdered(&chart_rowset, &relactions_rowset, requested_node,  
initial_node, order)
```

Description

Note

SmartNavigation has been desupported. This method remains for backward compatibility only.

Use this method to load the requested tree node into the SmartNavigation chart rowset and the component buffer. The order for this node within its chart level is specified by this method.

Parameters

Parameter	Description
<i>&chart_rowset</i>	Specifies the SmartNavigation chart rowset. Typically, this is the rowset returned by the <code>GetABNChartRowSet</code> function.
<i>&relactions_rowset</i>	Specifies the related actions rowset. Typically, this is the rowset returned by the <code>GetABNRelActnRowSet</code> function.
<i>requested_node</i>	Specifies as a Boolean value whether the calling node is the requested node.
<i>initial_node</i>	Specifies the initial chart node. Typically, this is returned directly by calling the <code>GetABNInitialNode</code> function.
<i>order</i>	Specify the order for the node as a number. Note: For a given chart level, all chart leaves must have a display order greater than zero.

Returns

None.

MoveAsChild method: Node class

Syntax

`MoveAsChild(Node)`

Description

The `MoveAsChild` method moves the node executing the method to a different node in the tree. The node becomes the first child node under the named node. The specified node becomes the new parent to the child node. The node specified by *Node* must be an existing node in the current tree. All child nodes and details are also moved with the node.

Parameters

Parameter	Description
<i>Node</i>	Specify a node object. This parameter value must be an object, not a string or a name.

Note

To specify a node name, not a node object, use the `MoveAsChildByName` method.

Returns

A number; 0 if method is successful.

Example

The following example moves node 10200 from node 10100 (old parent) to node 00001 (new parent).

```
&MY_NODE = &MY_TREE.FindNode("10200", "");  
&NEW_PARENT = &MY_TREE.FindNode("00001", "");  
If &NEW_PARENT <> Null Then  
    &MY_NODE.MoveAsChild(&NEW_PARENT);  
End-If;
```

Related Topics

- [MoveAsChildByName method: Node class](#)

MoveAsChildByName method: Node class

Syntax

`MoveAsChildByName(NodeName)`

Description

The `MoveAsChildByName` method moves the node executing the method to a different node in the tree. The node becomes the first child node under the parent node. The specified node becomes the new parent to the node. The node specified by *NodeName* must be a valid node name. All child nodes and details are also moved with the node.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of a node. This parameter takes a string value. <i>NodeName</i> must be a valid node for the existing tree.

Note

To specify a node object, not a node name, use the `MoveAsChild` method.

Returns

A number; 0 if method is successful.

Example

The following moves node 10200 from node 10100 (old parent) to node 00001 (new parent)

```
&MY_NODE = &MY_TREE.FindNode("10200", "");  
If &MY_NODE <> Null Then  
    &MY_NODE.MoveAsChildByName("00001");  
End-If;
```

Related Topics

- [MoveAsChild method: Node class](#)

MoveAsSib method: Node class

Syntax

`MoveAsSib(Node)`

Description

The `MoveAsSib` method moves the node executing the method to a new place in the tree. The current node becomes the next sibling node under the specified node. All child nodes and details are also moved with the node.

Parameters

Parameter	Description
<i>Node</i>	Specify a node object. This parameter value must be an object, not a string or a name.

Note

To specify a node name, not a node object, use the `MoveAsSibByName` method.

Returns

A number; 0 if method is successful.

Example

```
&MYNODE = &MYTREE.FindNode("20000", "");  
&MYNODE2 = &MYTREE.FindNode("20100", "");  
&MYNODE.MoveAsSib(&MYNODE2);
```

Related Topics

- [MoveAsSibByName method: Node class](#)

MoveAsSibByName method: Node class

Syntax

`MoveAsSibByName(NodeName)`

Description

The `MoveAsSibByName` method moves the node executing the method to a new place in the tree. The current node becomes the next sibling node under the specified node. All child nodes and details are also moved with the node.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of a node. This parameter takes a string value. <i>NodeName</i> must be a valid node for the existing tree.

Note

To specify a node object, not a node name, use the MoveAsSib method.

Returns

A number; 0 if method is successful.

Example

```
&MYNODE = &MYTREE.FindNode("20000", "");  
&MYNODE.MoveAsSibByName("10100");
```

Related Topics

- [MoveAsSib method: Node class](#)

PasteChild method: Node class

Syntax

```
PasteChild()
```

Description

The PasteChild method makes the node or leaf from the buffer (clipboard) a child to the node executing the method. You must use the Cut node or leaf method before you can paste a node or leaf.

You can have only one object at a time on the clipboard. If you cut another node or leaf, the node or leaf on the clipboard is overwritten.

Parameters

None.

Returns

A number; 0 if method is successful.

PasteSib method: Node class

Syntax

```
PasteSib()
```

Description

The PasteSib method makes the node from the buffer (clipboard) a sibling to the node executing the method. You must use the Cut node method before you can paste a node.

You can have only one object at a time on the clipboard. If you cut another leaf or node, the node on the clipboard is overwritten.

Parameters

None.

Returns

A number; 0 if method is successful.

RefreshDescription method: Node class

Syntax

```
RefreshDescription()
```

Description

The RefreshDescription method enables you to change the description of a node on a page and have the update be displayed immediately. If you don't use RefreshDescription, you must save the tree and reopen it for the change to be displayed.

Parameters

None.

Returns

A zero (0) if description is refreshed successfully, a different error number otherwise.

Example

```
&result= &NodeObj.refreshdescription();
```

Rename method: Node class

Syntax

```
Rename(NodeName)
```

Description

The Rename method renames the node object executing the method without changing any other properties. The parameter *NodeName* takes a string value. The node specified by *NodeName* must be a new node. You receive an error if the node already exists.

Note

The Rename method does not rename the node in a user node component. Your application needs to do that.

Returns

A number; 0 if method is successful.

Example

```
&MYNODE = &MYTREE.FindNode("10900", "");  
&MYNODE.Rename("10200");
```

SwitchLevel method: Node class

Syntax

```
SwitchLevel(NewLevelNumber)
```

Description

The SwitchLevel methods enables you to move a node down from one level to another.

NewLevelNumber must specify a valid level number. For trees in which the Level Use parameter is set to Strictly Enforce Levels, the new level must be at least one level lower than the node's parent level.

If the level specified by *NewLevelNumber* doesn't exist, it's automatically generated and added to the tree.

Parameters

Parameter	Description
<i>NewLevelNumber</i>	Specify the level number to where you want the node moved.

Returns

A zero (0) if node is moved successfully, a different error number otherwise.

Unbranch method: Node class

Syntax

```
Unbranch()
```

Description

The Unbranch method is the opposite of the Branch method: that is, it unbranches the node executing the method if it is branched. All of the child node and leaves of the node become part of the current open tree and accessible in that tree. You can't unbranch the Root Node in a branched tree.

If the node executing the method isn't branched, you receive a runtime error. Use the IsBranched property to make sure a node is branched.

Returns

A number; 0 if method is successful.

Example

```
&MYNODE = &MYTREE.FindNode("10900", "");  
&MYNODE.Unbranch();
```

Related Topics

- Tree Manager: Working with Tree Branches

Node Class Properties

In this section, we discuss the Node class properties. The properties are discussed in alphabetical order.

AllChildCount property: Node class

Description

This property returns the number of all the child nodes and leaves of the node, that is, all the nodes and leaves below this node.

This property is read-only.

AllChildNodeCount property: Node class

Description

This property returns the number of child nodes of the node, that is, all the nodes below this node.

To determine all the leaves below a node, subtract the AllChildNodeCount from the AllChildCount

This property is read-only.

Example

To determine all the leaves below a node, use the AllChildNodeCount with the AllChildCount property.

```
&AllCount = (&MyNode.AllChildCount - &MyNode.AllChildNodeCount);
```

ChildLeafCount property: Node class

Description

This property returns the number of immediate child leaves below this node.

This property is read-only.

ChildNodeCount property: Node class

Description

This property returns the number of immediate child nodes below this node.

This property is read-only.

CollImageName property: Node class

Description

This property enables you to specify the image name for a collapsed node.

This property is read/write.

Description property: Node class

Description

This property returns the description of the node.

This property is read-only.

DisplayLevelNumber property: Node class

Description

When using the Tree API to create a graphic representation of the tree (such as for HTML Tree Manager or other application pages) use this property to indicate the display level, that is, tell the user how many levels deep the node is. This is generally used for trees where levels aren't used and the LevelNumber property always returns 0.

This property is read-only.

Related Topics

- [LevelNumber property: Node class](#)

ExpImageName property: Node class

Description

This property enables you to specify the expanded image name for a node.

This property is read/write.

FirstChildLeaf property: Node class

Description

This property returns a reference to the first child leaf of the node. This is the leaf that appears highest in the list of children of the node in PeopleSoft Tree Manager.

This property is read-only.

Example

```
&NEWLEAF = &MYNODE.FirstChildLeaf;
```

FirstChildNode property: Node class

Description

This property returns a reference to the first child node of the node. This is the node that appears highest in the list of children of the node in PeopleSoft Tree Manager.

This property is read-only.

Example

```
&CHILDNODE = &MYNODE.FirstChildNode;
```

HasChildLeaves property: Node class

Description

This property returns True if the node has immediate child leaves, False otherwise.

This property is read-only.

HasChildNodes property: Node class

Description

This property returns True if the node has immediate child nodes, False otherwise.

This property is read-only.

HasChildren property: Node class

Description

This property returns True if the node has either child leaves or child nodes anywhere in the subtree, not just immediately under the node.

This property is read-only.

HasNextSib property: Node class

Description

This property returns True if the node has a next sibling, that is, if it isn't the last node.

This property is read-only.

Example

```
While &MYNODE.HasNextSib
    &MYNODE = &MYNODE.NextSib;
    /* do some processing */
End-While;
```

HasPrevSib property: Node class

Description

This property returns True if the node has a previous sibling, that is, if it isn't the first node.

This property is read-only.

IsBranched property: Node class

Description

This property returns True if the node is branched, False otherwise.

This property is read-only.

IsChanged property: Node class

Description

This property returns True if the node has been edited or changed but the current tree hasn't been saved.

This property is read-only.

IsCut property: Node class

Description

This property returns True if the node has been cut from the displayed tree. This property is generally used with the HTML Tree Manager.

This property is read-only.

IsDeleted property: Node class

Description

This property returns True if the node has been deleted but the current tree hasn't been saved.

This property is read-only.

IsInserted property: Node class

Description

This property returns True if the node was inserted as a new node into the tree but the tree hasn't been saved.

This property is read-only.

Example

```
If &MYNODE.IsInserted Then  
    &MYTREE.Save();  
End-if;
```

IsRoot property: Node class

Description

This property returns True for both of the following:

- the node is the root node of an unbranched tree.
- the node is the top node of an opened tree branch.

Otherwise, the property returns False.

This property is read-only.

LastChildLeaf property: Node class

Description

This property returns a reference to the last child leaf of the node. This is the leaf that appears lowest in the list of children of the node in PeopleSoft Tree Manager.

This property is read-only.

Example

```
&NEWLEAF = &MYNODE.LastChildLeaf;
```

LastChildNode property: Node class

Description

This property returns a reference to the last child node of the node. This is the node that appears lowest in the list of children of the node in PeopleSoft Tree Manager.

This property is read-only.

Example

```
&CHILDNODE = &MYNODE.LastChildNode;
```

LevelNumber property: Node class

Description

This property returns the level number of the node. Values are 1-99 for Strict or Loose level trees. This property returns 0 for trees that don't have levels.

Note

PeopleSoft does not recommend using this property to set the level of the node. Instead, use the `SwitchLevel` method.

This property is read/write.

Related Topics

- [SwitchLevel method: Node class](#)

Name property: Node class

Description

This property returns the name of the node (as a string.) You must set this property to a valid value if you are creating a new node.

Note

Do not use this property to change the name of an existing node. The change will not be reflected in the database. You must use the `Rename` method to change the name of an existing node.

This property is read/write.

Related Topics

- [Rename method: Node class](#)

NextSib property: Node class

Description

This property returns a reference to the next sibling node. If there isn't a next sibling node, Null is returned.

This property is read-only.

Example

```
While &MYNODE.HasNextSib
    &MYNODE = &MYNODE.NextSib;
    /* do some processing */
End-While;
```

Parent property: Node class

Description

This property returns a reference to the node that is the parent of the node executing the property. If the current node has no parent (is a root node) False is returned.

This property is read-only.

Example

```
&PARENT = &MYNODE.Parent;
```

PrevSib property: Node class

Description

This property returns a reference to the node that is the previous sibling node to the node executing the property. If there isn't a previous sibling, Null is returned.

This property is read-only.

Example

```
If &MYNODE.PrevSib Then
    /* do processing */
End-if;
```

State property: Node class

Description

This property returns the *state* of the node, that is, does it have children, and are they expanded or collapsed.

See [Expand method: Node class](#).

The values for this property are:

Value	Description
0	Node has no children
1	Children are expanded
2	Children are collapsed
3	Leaves are collapsed

This property is read-only.

Example

```
&VALUE = &MYNODE.State;  
If &VALUE = 2 Then  
    &MYNODE.Expand(0);  
End-if;
```

TreeBranchName property: Node class

Description

This property returns the branch name of the tree as a string if the tree is branched. If not branched, this property returns a blank string.

This property is read-only.

TreeEffDt property: Node class

Description

This property returns the effective date of the tree as a string if the tree is effective-dated. If not effective-dated, this property returns a blank string.

This property is read-only.

TreeName property: Node class

Description

This property returns the name of the tree as a string.

This property is read-only.

TreeSetId property: Node class

Description

This property returns the SetID of the tree as a string if the tree has a SetID. If the tree doesn't have a SetID, this property returns a blank string.

This property is read-only.

TreeUserKeyValue property: Node class

Description

This property returns the UserKeyValue of the tree as a string if the tree has a UserKeyValue. If the tree doesn't have a UserKeyValue, this property returns a blank string.

Type property: Node class

Description

This property returns the type of the node. This property takes a string value. Values are:

- "G" (Group): normal unbranched node or record group
- "B" (Branched nodes)
- "R" (Query Record): used for Query Access Trees only

This property is read-only.

Tree Class

Tree objects are instantiated from a session object with the `GetTree` method.

The following code sample gets a tree, then opens the tree structure associated with that tree:

```
Local string &TREE_NAME;  
Local string &TREE_DT;  
Local ApiObject &MYSESSION, &VC_TREE, &STRUCT;  
/* Get and Open the Tree using the Tree API */  
&MYSESSION = %Session;  
/* Get the Tree Name and Effective Date from the level 0 record */  
&TREE_NAME = "CUSTOMER";  
&TREE_DT = "1900-01-01";  
/* Get and Open the Tree */  
&VC_TREE = &MYSESSION.GetTree();  
  
/* open the tree with read access only */  
  
&VC_TREE.OPEN("BKINV", "", &TREE_NAME, &TREE_DT, "", False);  
/* Get and Open Tree Structure */  
&STRUCT = VC_TREE.Structure;
```

See [GetTree method: Session class](#).

Tree Class Methods

In this section, we discuss the Tree class methods. The methods are discussed in alphabetical order.

Audit method: Tree class

Syntax

```
Audit()
```

Description

The Audit method audits the tree object executing the method to determine its validity.

The Audit method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method before you can audit it.

Returns

A number: 0 if the tree passes all audits. If Audit returns a value not equal to 0, an error is logged.

Related Topics

- [Open method: Tree class](#)
- Tree Manager: Understanding the Auditing and Repairing of Trees

AuditByName method: Tree class

Syntax

```
AuditByName(SetID, UserKeyValue, TreeName, EffDt, BranchName)
```

Description

The AuditByName method audits the tree specified by the parameters passed to it. The AuditByName method can be used only with a tree identifier, it cannot be used on a fully instantiated, open tree. Before you use the AuditByName method, you must explicitly close any open tree objects (with the Close method.) You receive an error if there are any open trees.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Parameter	Description
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

A number: 0 if the tree passes all audits. If this method returns a value not equal to 0, an error is logged.

Example

```
&ISVALID = &MYTREE.AuditByName("", "", "PERSONAL_DATA", "05-05-1997", "");
```

Related Topics

- [Close method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)
- Tree Manager: Understanding the Auditing and Repairing of Trees

Close method: Tree class

Syntax

```
Close()
```

Description

The Close method closes the tree, freeing the memory associated with that object, and discarding any changes made to the tree since the last save. The Close method can be used only on an open tree, not a closed tree. This means you must have opened the tree with the Open method before you can close it. To save any changes, you must use the Save method before using Close.

Returns

A number: 0 if the method completed successfully.

Related Topics

- [Open method: Tree class](#)

Copy method: Tree class

Syntax

```
Copy(FromSetId, FromUserKeyValue, FromTreeName, FromEffDt, FromBranchName,  
ToSetId, ToUserKeyValue, ToTreeName, ToEffDt, ToBranchName)
```

Description

The Copy method copies from the tree identified by the *From* parameters and copies it to the tree identified with the *To* parameters. The tree specified by the *To* parameters must be a *new* tree. You receive an error if the tree already exists. The tree specified by the *From* parameters does *not* have to match the tree identifier executing the method.

The Copy method can be used only with a *closed* tree, it cannot be used on an open tree. Before you use the Copy method, you must explicitly close any open tree objects (with the Close method.) You receive an error if there are any open trees.

To access the new tree, you must use the Open method.

Parameters

Parameter	Description
<i>FromSetId</i>	Specify the table indirection key for the tree to be copied from. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>FromUserKeyValue</i>	Specify the User Key Value for the tree to be copied from. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>FromTreeName</i>	Specify the name for the tree to be copied from. This parameter takes a string value.
<i>FromEffDt</i>	Specify the effective date for the tree to be copied from. This parameter takes a string value.
<i>FromBranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Parameter	Description
<i>ToSetId</i>	Specify the table indirection key for the tree to be copied to. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>ToUserKeyValue</i>	Specify the User Key Value for the tree to be copied to. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B" you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>ToTreeName</i>	Specify the name for the tree to be copied to. This parameter takes a string value.
<i>ToEffDt</i>	Specify the effective date for the tree to be copied to. This parameter takes a string value.
<i>ToBranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

An integer: 0 if copied successfully.

Example

```
&MYTREE.Copy("", "", "PERSONAL_DATA", "05-05-1997", "", "", "", "PERSONAL_EDIT1",
"05-⇒
05-1997", "");
```

Related Topics

- [Close method: Tree class](#)
- [Open method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)

Create method: Tree class

Syntax

```
Create(SetID, UserKeyValue, TreeName, EffDt, StructureName)
```

Description

The Create method creates a new tree, based on the parameters passed with the method. The specified tree must be a new tree. You receive an error if the tree already exists.

The Create method can be used only with a closed tree, it cannot be used on an open tree. Before you use the Create method, you must explicitly close any open tree objects (with the Close method.) You receive an error if there are any open trees.

After you create a new tree, you don't have to open it with the Open method. The existing tree object points to the new tree.

The tree structure specified with *StructureName* determines what database fields the new tree is based on, what pages you can use to create tree nodes and detail values, and what record definitions PeopleSoft Tree Manager saves tree-related data in. The tree structure must already exist.

The new tree must be saved (Save, SaveAs, and so on) for this tree to be saved to the database.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.
<i>StructureID</i>	Specify the name of the tree structure to use for this tree. This parameter takes a string value.

Returns

An integer: 0 if created successfully.

Example

```
&MYTREE.Create("", "", "PERSONAL_NEW", "05-05-1997", "PERSONAL_DATA");
```

Related Topics

- [Close method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)
- Tree Manager: Understanding Steps to Create Trees

Delete method: Tree class

Syntax

```
Delete(SetID, UserKeyValue, TreeName, EffDt, BranchName)
```

Description

The Delete method deletes the specified tree from the database. The Delete method can be used only with a closed tree, it cannot be used on an open tree. Before you use the Delete method, you must explicitly close any open tree objects (with the Close method.) You receive an error if there are any open trees.

The specified tree does not have to match the tree identifier executing the method.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.

Parameter	Description
<i>BranchName</i>	Specify the name of the branch for the tree. This parameter takes a string value. If the tree is unbranched, you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

An integer: 0 if deleted successfully.

Example

```
&MYTREE=&Session.GetTree();
```

```
If ALL(&MYTREE) Then  
    &RETVALUE = &MYTREE.Delete("", "", "PERSONAL_REN2", "05-05-1997", "");  
End-If;
```

Related Topics

- [Close method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)

Exists method: Tree class

Syntax

```
Exists(SetID, UserKeyValue, TreeName, EffDt, BranchName)
```

Description

The Exists method finds an existing tree, as specified by the parameters. The parameters must specify a unique tree. If a tree matching the parameters is found, the method returns 0. This method works with either open or closed trees.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Parameter	Description
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

An integer: 0 if tree exists.

Example

```
&RSLT = &MYTREE.Exists("", "", "VENDOR_PER_DATA", "05-03-1998", "");
If &RSLT = 0 Then
    /* tree exists, do processing */
Else
    /* tree doesn't exist, do error processing */
End-if;
```

Related Topics

- [IndirectionMethod property: Tree Structure class](#)

FindLeaf method: Tree class

Syntax

```
FindLeaf(RangeFrom, RangeTo)
```

Description

The FindLeaf method finds an existing leaf (specified by the *range* parameters) in the tree executing this method. If the leaf is found, a leaf object is returned. If the leaf isn't found, a Null is returned.

You can use wildcards with the *range* parameters. Use an asterisk (*) in place of a number of characters. Use a question mark (?) in place of one character. You can also provide one of the ranges, and specify a Null string for the other.

Suppose you wanted to find the leaf with the range 81005 to 82000. The following would be valid:

```
&MyLeaf = &MyTree.FindLeaf("81*", "82000");
```

This would also be valid:

```
&MyLeaf = &MyTree.FindLeaf("8100?", "82000");
```

You could also specify this:

```
&MYLEAF = &MYTREE.FindLeaf("81000", "");
```

If you specify the exact same value for both *RangeFrom* and *RangeTo*, the *RangeTo* parameter is ignored.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the leaf to be found. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the leaf to be found. This parameter takes a string value.

Returns

A reference to a leaf object.

Example

```
&MYLEAF = &MYTREE.FindLeaf("81000", "");
```

FindNode method: Tree class

Syntax

```
FindNode(NodeName, Description)
```

Description

The FindNode method returns a reference to the node object specified by the parameters passed to the method. If the node is found, a node object is returned. If the node isn't found, a Null is returned.

Note

If you've only specified a node name, and the node you're searching for is in an unexpanded portion of the tree, this method expands the tree down to that node. If you've only specified a node description the search, occurs only in the memory. If the node isn't found, the tree is not expanded.

You should specify either the node name other description, not both. You should specify a Null string for the other. If both are provided, only the node name is used and the description is ignored.

You can use wildcards with the parameters. Use an asterisk (*) in place of a number of characters. Use a question mark (?) in place of one character.

Suppose you wanted to find the node called 10200, with a description of "Human Resources". The following would be valid:

```
&MyNode = &MyTree.FindNode("", "Human*");
```

This would also be valid:

```
&MyNode = &MyTree.FindNode("1020?", "");
```

You could also use the following:

```
&MYNODE = &MYTREE.FindNode("10200", "");
```

Note

If you're searching using wildcard characters and more than one node matches the search conditions, only the first occurrence of the node is returned

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of the node that you want to find. This parameter takes a string value. Specify either the node name or the description.
<i>Description</i>	Specify the description of the node that you want to find. This parameter takes a string value. Specify either the node name or the description.

Returns

A reference to a node object.

Example

```
&MYNODE = &MYTREE.FindNode("10200", "");
```

FindRoot method: Tree class

Syntax

```
FindRoot()
```

Description

The FindRoot method returns a reference to the root node object of the tree object executing the method. This method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method before you can find the root node.

This method returns an error if the tree has no nodes associated with it.

Returns

A reference to a node object.

Example

```
&MYNODE = &MYTREE.FindRoot();
```

Related Topics

- [Open method: Tree class](#)

InsertRoot method: Tree class

Syntax

```
InsertRoot(NodeName)
```

Description

The InsertRoot method inserts a node at the top of the tree object executing the method. *NodeName* is the name of the node you are creating. This parameter takes a string value. The InsertRoot method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method before you can insert any nodes.

You can insert the root node only in a new tree, that is, a tree that was just created with the Create method. Also, after you create a new tree, you must insert the root node before you can insert any other nodes.

In a strict level tree, the first level must be defined before you can insert the root node.

This method returns an error if the tree already has nodes in it.

Returns

A reference to a node object.

Example

```
&MyRootNode = &MYTREE.InsertRoot("000001");
```

Related Topics

- [Open method: Tree class](#)

LeafExists method: Tree class

Syntax

```
LeafExists(RangeFrom, RangeTo)
```

Description

The LeafExists method enables you to verify if the leaf specified by the parameters exists in the current tree.

Suppose you wanted to check the leaf with the range 81005 to 82000 exists. The following would be valid:

```
&MyResult = &MyTree.LeafExists("81005", "82000");
```

This would also be valid, and would check on leaves up to 82000:

```
&MyResult = &MyTree.LeafExists("", "82000");
```

If you specify the exact same value for both *RangeFrom* and *RangeTo*, the *RangeTo* parameter is ignored.

Parameters

Parameter	Description
<i>RangeFrom</i>	Specify the starting range of the leaf you're verifying. This parameter takes a string value.
<i>RangeTo</i>	Specify the ending range of the leaf you're verifying. This parameter takes a string value.

Returns

An integer: 0 if the leaf exists.

Related Topics

- [NodeExists method: Tree class](#)
- [FindLeaf method: Tree class](#)

LockTree method: Tree class

Syntax

LockTree()

Description

Use the LockTree method to check out a tree for editing. Use this method to prevent saving conflicts when you have multiple users accessing the same tree, using both the Tree API and PeopleSoft Tree Manager. To release a tree, use the UnlockTree method.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

To verify if a tree is already locked, use the LockStatus property.

This method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method.

Parameters

None.

Returns

An integer: 0 if locked successfully.

Related Topics

- [TreeLocksNumber method: Tree class](#)
- [UnlockTree method: Tree class](#)
- [HasLockedBranches property: Tree class](#)
- [LockStatus property: Tree class](#)
- [UseUpdateReservation property: Tree class](#)

Open method: Tree class

Syntax

Open(*SetID*, *UserKeyValue*, *TreeName*, *EffDt*, *BranchName*, *Update*)

Description

The Open method opens the tree object specified by the parameters. The Open method can be used only with a closed tree, it cannot be used on an open tree. You cannot read or set any properties of a tree until after you open it. When you open a tree, you can specify whether you

want to open it for update, or in read-only mode, with the *Update* parameter. If you try updating or writing to a tree opened in read-only mode, you receive an error.

① Note

Because EFFDT is a key field for a tree definition, an exact match is required to open a tree with the Open method. A less restrictive method, OpenAsOfDate, provides an alternative to Open by specifying an *AsOfDate* parameter instead of the *EffDt* parameter.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for the tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for the tree. This parameter takes a string value. The format must be in the correct format for the database platform the code is executing on.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>Update</i>	Specify if you want to open the tree for update or in read-only mode. This parameter takes a Boolean value. Values for <i>Update</i> are: • True: open tree structure in update mode (read/write). • False: open tree structure in read-only mode. If you try updating or writing to a tree structure opened in read-only mode, you receive an error.

Returns

An integer: 0 if opened successfully.

Example

The following example opens a tree object, then tests to see if the tree was actually opened:

```
&RSLT = &MYTREE.Open("", "", "PERSONAL_DATA", "05-05-1997", "", True);

If &RSLT = 0 Then
    /* normal processing */
Else
    /* error processing tree isn't open */
End-if;
```

Related Topics

- [Close method: Tree class](#)
- [OpenAsOfDate method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)

OpenAsOfDate method: Tree class

Syntax

`OpenAsOfDate(SetID, UserKeyVal, TreeName, AsOfDate, BranchName, Update)`

Description

The `OpenAsOfDate` method operates similarly to the `Open` method and uses the same parameters except that instead of requiring the *EffDt* parameter, `OpenAsOfDate` uses a less restrictive *AsOfDate* parameter. The `OpenAsOfDate` method opens the most recent tree based on *AsOfDate*. If *AsOfDate* is not supplied, the current date is used.

Note

Because EFFDT is a key field for a tree definition, an exact match is required to open a tree with the `Open` method.

The `OpenAsOfDate` method can be used only with a closed tree; it cannot be used on an open tree. You cannot read or set any properties of a tree until after you open it. When you open a tree, you can specify whether you want to open it for update, or in read-only mode, with the `Update` parameter. If you try updating or writing to a tree opened in read-only mode, you receive an error.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for the tree. This parameter takes a string value.
<i>AsOfDate</i>	Specify the "as-of-date" for the tree as a string. The format must be in the correct format for the database platform the code is executing on. If this parameter is not supplied, then the current date is used. If more than one tree matches the <i>SetID</i>, <i>UserKeyValue</i>, <i>TreeName</i>, and <i>BranchName</i> parameters, the tree with most recent effective date less than or equal to the as-of-date is opened.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>Update</i>	Specify if you want to open the tree for update or in read-only mode. This parameter takes a Boolean value. Values for <i>Update</i> are: • True: open tree structure in update mode (read/write). • False: open tree structure in read-only mode. If you try updating or writing to a tree structure opened in read-only mode, you receive an error.

Returns

An integer: 0 if opened successfully.

Example

The following example opens a tree object with most recent effective date matching the other tree criteria. Then, the program tests to see if the tree was actually opened:

```
&ret = &MyTree.OpenAsOfDate("QEDM1", "", "PERSONAL_DATA", "", "", True);

If &ret = 0 Then
    /* normal processing */
Else
    /* error processing tree isn't open */
End-if;
```

Related Topics

- [Open method: Tree class](#)

OpenForExport method: Tree class

Syntax

`OpenForExport(SetID, UserKeyValue, TreeNameEffDt)`

Description

Use the OpenForExport method to open a tree for export processes (using TreeMover.)

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for the tree. This parameter takes a string value.

Parameter	Description
<i>EffDt</i>	Specify the effective date for the tree. This parameter takes a string value. The format must be in the correct format for the database platform the code is executing on.

Returns

An integer: 0 if opened successfully.

Example

```
If &TREE.OpenForExport(&SETID, &USERKEYVALUE, &TREE_NAME, &TREE_EFFDT) <> 0  
Then
```

```
/* processing */
```

```
End-if;
```

Related Topics

- [Tree Manager: File Layout Details](#)

OpenWholeTree method: Tree class

Syntax

```
OpenWholeTree(SetID, UserKeyValue, TreeName, EffDt)
```

Description

The OpenWholeTree method enables you to open a tree as if it were an unbranched tree. With this kind of tree, branched nodes cannot be distinguished from unbranched nodes. This means you can traverse the entire tree. It also means that branches have a node icon, not a branch icon. This method can be used only with a closed tree, it cannot be used on an open tree. You cannot read any properties of a tree until after you open it. This tree is always opened as read-only.

Note

You can't open a tree using this method and update it. The tree is opened in read-only mode.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for the tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for the tree. This parameter takes a string value. The format must be in the correct format for the database platform the code is executing on.

Returns

An integer: 0 if opened successfully.

Example

```
&pSession = %Session;  
&pTreeObj = &pSession.GetTree();  
&status = &pTreeObj.OpenWholeTree(&Setid, &SetCntrlValue, &TreeName,  
String(&EffDt));
```

Related Topics

- [Close method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)

NodeExists method: Tree class

Syntax

```
NodeExists(NodeName)
```

Description

The `NodeExists` method enables you to verify if the node specified by *NodeName* exists in the current tree.

Note

If the node you're searching for is in an unexpanded portion of the tree, this method expands the tree down to that node.

Parameters

Parameter	Description
<i>NodeName</i>	Specify the name of the node that you want to find. This parameter takes a string value.

Returns

An integer: 0 if the node exists.

Related Topics

- [FindLeaf method: Tree class](#)
- [FindNode method: Tree class](#)
- [LeafExists method: Tree class](#)

Rename method: Tree class

Syntax

```
Rename(FromSetId, FromUserKeyValue, FromTreeName, FromEffDt, FromBranchName,  
ToTreeName)
```

Description

The `Rename` method renames a tree specified with the *From* parameters to the tree specified with *ToTreeName*. The tree specified by *ToTreeName* must be a new tree. You receive an error if the tree already exists. The tree specified by the *From* parameters does not have to match the tree executing the method.

The `Rename` method can be used only with a closed tree, it cannot be used on an open tree. Before you use the `Rename` method, you must explicitly close any open tree objects (with the `Close` method.) You receive an error if there are any open trees.

To access the new tree, you must use the `Open` method.

Parameters

Parameter	Description
<i>FromSetId</i>	Specify the table indirection key for the tree to be copied from. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>FromUserKeyValue</i>	Specify the User Key Value for the tree to be copied from. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B" you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>FromTreeName</i>	Specify the name for the tree to be copied from. This parameter takes a string value.
<i>FromEffDt</i>	Specify the effective date for the tree to be copied from. This parameter takes a string value.
<i>FromBranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>ToTreeName</i>	Specify the new name of the tree. This parameter takes a string value.

Returns

An integer: 0 if renamed successfully.

Example

```
&MYTREE.Rename("", "", "PERSONAL_DATA3", "05-05-1997", "", "PERSONAL_REN2");
```

Related Topics

- [Close method: Tree class](#)
- [Open method: Tree class](#)
- [Close method: Tree class](#)
- [IndirectionMethod property: Tree Structure class](#)

Save method: Tree class

Syntax

Save()

Description

The Save method writes any changes to the tree executing the method to the database. It also performs audits.

The Save method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method before you can save it.

The tree object remains open after executing Save. You must execute the Close method on the object before it is closed and the memory freed.

This method returns an optional Boolean value: True if the tree was saved with no errors, False if there are one or more errors.

Note

If you're calling the Tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

Parameters

None.

Returns

An integer: 0 if save successfully.

Related Topics

- Tree Manager: Understanding the Auditing and Repairing of Trees

SaveAs method: Tree class

Syntax

SaveAs(*SetID*, *UserKeyValue*, *TreeName*, *EffDt*, *BranchName*)

Description

The SaveAs method writes any changes to the tree executing the method to the new tree specified with the parameters. It also performs audits.

The tree specified with the parameters must be a new tree. You receive an error if the tree already exists. The new tree must have at least one different key field from the original tree.

The SaveAs method automatically closes the tree that is associated with the tree object executing the method, and associates that tree object with the new tree. Any changes made to

the original tree since the last time the tree was saved are discarded. For example, suppose you opened a tree named `DEPENDENT_BENEF` and associated it with the variable `&MYTREE`. If you executed the `SaveAs` method with `&MYTREE`, changing the name to `DEPENDENT_BENEF2`, `&MYTREE` would now be associated with `DEPENDENT_BENEF2`, and the original tree, `DEPENDENT_BENEF`, would be closed.

```
&MYTREE.Open("", "", "DEPENDENT_BENEF", "02-02-1999", "", False);  
/* do some processing */  
&MYTREE.SaveAs("", "", "DEPENDENT_BENEF2", "02-05-1999", "");
```

`&MYTREE` is now associated with `DEPENDENT_BENEF2`, not with the original open tree.

Note

If you're calling the Tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a COMMIT.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its <code>IndirectionMethod</code> specified as "S", you must specify a <code>SetID</code>. If the tree structure doesn't have its <code>IndirectionMethod</code> specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its <code>IndirectionMethod</code> specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

This method returns an integer: 0 if saved successfully, a number greater than 0 otherwise.

Example

```
&MYTREE.SaveAs("", "", "DEPENDENT_BENEF2", "02-05-1999", "");
```

Related Topics

- Tree Manager: Understanding the Auditing and Repairing of Trees

SaveAsDraft method: Tree class

Syntax

```
SaveAsDraft(SetID, UserKeyValue, TreeName, EffDt, Branch`Name)
```

Description

The SaveAsDraft method writes any changes to the tree executing the method to the new tree specified with the parameters. However, it does not perform audits. Trees that are saved in this way are marked as "draft" and will not be valid (that is, cannot be used with other PeopleTools) until the tree audit is passed during Save, SaveAs, or the Tree Audits Application Engine Tree Utility program..

The tree specified with the parameters must be a new tree. You receive an error if the tree already exists. The new tree must have at least one different key field from the original tree.

The SaveAsDraft method automatically closes the tree that is associated with the tree object executing the method, and associates that tree object with the new tree. Any changes made to the original tree since the last time the tree was saved are discarded.

See SaveAs for more details.

Note

If you're calling the Tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a Commit.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Parameter	Description
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.
<i>BranchName</i>	This parameter is required, but it is unused in this release. You must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.

Returns

This method returns an integer: 0 if saved successfully, a number greater than 0 otherwise.

Example

```
&MYTREE. SaveAsDraft("", "", "PERSONAL_EDIT2", "05-05-1997", "");
```

Related Topics

- Tree Manager: Understanding the Auditing and Repairing of Trees

SaveDraft method: Tree class

Syntax

```
SaveDraft()
```

Description

The SaveDraft method writes any changes to the tree executing the method to the database. However, it does not perform audits. Trees that are saved in this way are marked as "draft" and will not be valid (that is, cannot be used with other PeopleTools) until the tree audit is passed.

The SaveDraft method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method before you can save it.

The tree object remains open after executing SaveDraft. You must execute the Close method on the object before it is closed and the memory freed.

Note

If you're calling the Tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a Commit.

Parameters

None.

Returns

This method returns an integer: 0 if saved successfully, a number greater than 0 otherwise.

Related Topics

- [Close method: Tree class](#)
- [Open method: Tree class](#)
- Tree Manager: Understanding the Auditing and Repairing of Trees

SetImportMode method: Tree class

Syntax

```
SetImportMode(Nodes_NumberLeaves_Number)
```

Description

Use the SetImportMode method to set up special memory allocation and simplified processing rules when running Tree Import.

This special mode also cuts back on the number of SQL calls by not getting node descriptions. This mode also blocks internal validation while inserting new node or leaf from an input file. All validation occurs during saving.

Parameters

Parameter	Description
<i>Nodes_Number</i>	Specify the number of nodes.
<i>Leaves_Number</i>	Specify the number of leaves.

Returns

An integer: 0 if set successfully.

Related Topics

- Tree Manager: File Layout Details

TreeLocksNumber method: Tree class

Syntax

```
TreeLocksNumber(setID, UserKeyValue, TreeName, EffDt)
```

Description

Use the TreeLocksNumber method to determine how many users have checked out any branches of a current tree. This method should be used to check if a tree definition could be changed without affecting other users working in different branches of a tree.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

You can use the TreeLocksNumber method with a both an open as well as a closed tree.

Parameters

Parameter	Description
<i>SetID</i>	Specify the table indirection key for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "S", you must specify a SetID. If the tree structure doesn't have its IndirectionMethod specified as "S", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>UserKeyValue</i>	Specify the User Key Value for the tree. This parameter takes a string value. If the tree structure the tree is based on has its IndirectionMethod specified as "U" or "B", you must specify a User Key Value. If the tree structure doesn't have its IndirectionMethod specified as "U" or "B", you must enter a Null string (that is, two quotation marks with no blank space between them ("")) for this parameter.
<i>TreeName</i>	Specify the name for this tree. This parameter takes a string value.
<i>EffDt</i>	Specify the effective date for this tree. This parameter takes a string value.

Returns

The number of locked branches. If the tree is not branched, but is checked out, the return value is 1.

Related Topics

- [LockTree method: Tree class](#)
- [UnlockTree method: Tree class](#)
- [UnlockTree method: Tree class](#)
- [UseUpdateReservation property: Tree class](#)

UnlockTree method: Tree class

Syntax

```
UnlockTree()
```

Description

Use the UnlockTree method to release a tree after editing. Use this method to prevent saving conflicts when you have multiple users accessing the same tree, using both the Tree API and PeopleSoft Tree Manager. To checkout a tree, use the LockTree method.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

To verify if a tree is checked out, use the LockStatus property.

This method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the Open method.

Parameters

None.

Returns

An integer: 0 if the tree is released successfully.

Related Topics

- [LockTree method: Tree class](#)
- [LockStatus property: Tree class](#)
- [UseUpdateReservation property: Tree class](#)

UpdateLock method: Tree class

Syntax

```
UpdateLock()
```

Description

Use the `UpdateLock` method to update the timestamp representing time when the user who has the tree checked out performed the last action on a tree.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using `UseUpdateReservation` Tree property.

Use this method to indicate that user who has the tree checked out is still working with it. The tree won't be released unless the **Tree Inactivity Period** specified on the People Tools Options page is expired.

This method should be called from PeopleCode in a response to any user action happened on a Tree Manager page.

This method can be used only on an open tree, not on a closed tree. This means you must have opened the tree with the `Open` method.

Parameters

None.

Returns

An integer: 0 if activity time was updated successfully.

Related Topics

- [LockTree method: Tree class](#)
- [UnlockTree method: Tree class](#)
- [UseUpdateReservation property: Tree class](#)

Tree Class Properties

In this section, we discuss the Tree class properties. The properties are discussed in alphabetical order.

AllValues property: Tree class

Description

When the tree is audited, the `AllValues` property specifies whether the audit should verify that the tree includes all user data detail values. This property returns a Boolean value: `True`, check all values, `False`, do not check all values.

If this is a new tree, and you do not set this property, a default value of `False` is automatically set.

This property can be used only with an open tree, that is, you must use the `Open` method on the tree before you can use this property.

This property is read/write.

Example

```
&MyTree.AllValues = False;
```

AuditDetails property: Tree class

Description

Set this property to False in cases when you do not want to perform Detail Audit. It could happen if you are reusing existing structure that contains Detail information for tree that does not use details('Winter' tree).

The default value for this property is True.

This property is read/write.

Branches property: Tree class

Description

This property returns a reference to a branch collection object. This property is used only with branched trees: it returns Null for trees that aren't branched.

This property can be used only with an open tree, that is, you must use the open the tree using the Open method before you can use this property.

This property is read-only.

BranchImageName property: Tree class

Description

Use this property to specify the image used to display branches on a page. This property takes a string value.

This property is read/write.

BranchLevel property: Tree class

Description

This property returns the level number (as a number) where this branch occurs in the tree. This property is used only with trees with levels: it returns zero for trees that don't have levels.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Example

```
&LevelNumber = &MyTree.BranchLevel;
```

BranchName property: Tree class

Description

This property returns the name of the specific branch for the tree, as a string. This property is used only with branched trees: it returns an empty string for trees that aren't branched.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Example

```
&BranchName = &MyTree.BranchName;
```

Category property: Tree class

Description

This property returns the category name for the tree, as a string. The category is a high-level grouping under which you can organize your tree structures and tree definitions. If you are creating a new tree, this property is required.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Example

```
&MyTree.Category = "PurchaseOrders";
```

Description property: Tree class

Description

This property returns the description of the tree, as a string. If you are creating a new tree, this property is required.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Example

```
&MyTree.Description = "Departmental Security";
```

DuplicateLeaves property: Tree class

Description

In most trees, you want each detail value to appear only once in the tree. To permit duplicate values, set this property to True.

If this is a new tree, and you do not set this property, a default value of False is automatically set.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

EffDt property: Tree class

Description

This property returns the effective date of the tree, as a date.

Note

PeopleSoft does not recommend using this property to change data, as changes are not stored in the database.

If this is a new tree, and you do not set this property, a default value of the current date is automatically set.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Example

```
&TreeEffDt = &MYTREE.EffDt;
```

HasDetailRanges property: Tree class

Description

This property returns True if the tree has any detail ranges.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

HasLockedBranches property: Tree class

Description

This property indicates whether any user other than current one has checked out any branch in a tree. This property returns a Boolean value: true if the tree has checked out branches, false otherwise.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

IsBranched property: Tree class

Description

This property indicates whether the tree is branched. Possible values for this property are True and False: True if the tree is branched, False if it isn't.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Example

```
If &MyTree.IsBranched Then
    /* Do branched processing */
Else
    /*Do unbranched processing */
End-If;
```

IsChanged property: Tree class

Description

This property returns True if the tree has been changed but not saved, False if the tree is unchanged.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Example

```
If &MyTree.IsChanged Then
    &MyTree.Save();
End-if;
&MyTree.Close();
```

IsOpen property: Tree class

Description

This property returns True if the tree is open, False if the tree is closed.

This property is read-only.

Example

```
If Not &MyTree.IsOpen Then
    &MyTree.Open("", "", "PERSONAL_DATA", &Date, "", True);
End-If;
```

IsQueryTree property: Tree class

Description

This property returns True if the tree is a Query access tree. It returns False if the tree is not a Query Access Tree.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

IsValid property: Tree class

Description

This property returns True if the tree is a valid tree that has passed all audits. It returns False otherwise.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Related Topics

- [Tree Manager: Understanding the Auditing and Repairing of Trees](#)

IsVersionChanged property: Tree class

Description

This property indicates if a tree version has been changed in the database. This property returns a Boolean value, true if the version was changed, false otherwise.

Use this function in a multi-user environment to check if a tree loaded in a read-only mode by User1 should be reloaded. A possible reason why it needs to be reloaded could be triggered by tree version change after User2, who had this tree checked out, released it.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

IsWholeTree property: Tree class

Description

This property indicates whether the entire tree is accessible. This property is set to True if a tree was opened using OpenWholeTree method. The OpenWholeTree method opens a tree in read-only mode without paying attention to the existing tree branches.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Example

```
If &MyTree.IsWholeTree Then
    /* Do processing */
Else
    /* close tree and reopen using OpenWholeTree method */
End-If;
```

KeyBranchName property: Tree class

Description

This property returns the branch name of the tree as a string if the tree is branched. If not branched, this property returns a blank string.

This property can be used with a closed tree, that is, before you use the Open method.

If the tree has already been opened, you can use the KeyBranchName property to get the tree branch name

This property is read-only.

KeyEffDt property: Tree class

Description

This property returns the effective date of the tree as a string if the tree is effective-dated. If not effective-dated, this property returns a blank string.

This property can be used with a closed tree, that is, before you use the Open method.

If the tree has already been opened, you can use the KeyEffDt property to get the tree effective date

This property is read-only.

KeyName property: Tree class

Description

This property returns the name of the tree as a string.

This property can be used with a closed tree, that is, before you use the Open method.

If the tree has already been opened, you can use the Name property to get the tree name.

This property is read-only.

KeySetId property: Tree class

Description

This property returns the SetID of the tree as a string if the tree has a SetID. If the tree doesn't have a SetID, this property returns a blank string.

This property can be used with a closed tree, that is, before you use the Open method.

If the tree has already been opened, you can use the KeySetId to get the tree Set Id.

This property is read-only.

KeyUserKeyValue property: Tree class

Description

This property returns the UserKeyValue of the tree as a string if the tree has a UserKeyValue. If the tree doesn't have a UserKeyValue, this property returns a blank string.

This property can be used with a closed tree, that is, before you use the Open method.

If the tree has already been opened, you can use the KeyUserKeyValue to get the tree UserKeyValue.

This property is read-only.

LeafCount property: Tree class

Description

This property returns the number of leaves in the tree.

This property can be used only with an open tree, that is, you must use the Open method on the tree before you can use this property.

This property is read-only.

LeafImageName property: Tree class

Description

Use this property to specify the image used to display leaves on a page. This property takes a string name.

This property is read/write.

LeafOnClipboard property: Tree class

Description

Use this property to determine if a leaf has been cut and is available to be 'pasted' into tree. This property returns a Boolean value: True if a leaf object exists on the clipboard, False otherwise.

This property is read-only.

LevelCount property: Tree class

Description

This property returns the number of levels defined for the tree. If the tree doesn't have any levels, this property returns zero (0).

See the LevelUse property.

Valid value range is a number between 0 and 99.

This property can only be used with an open tree, that is, you must use the Open method on the tree before you can use this property.

This property is read-only.

Related Topics

- [LevelUse property: Tree class](#)

Levels property: Tree class

Description

This property returns a reference to a level collection object. This property is used only with trees that have levels: it returns Null for trees that don't have levels.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

Related Topics

- [Level Collection Methods](#)
In this section, we discuss the Level Collection methods. The methods are discussed in alphabetical order.

LevelUse property: Tree class

Description

This property returns the level use of the tree. The values are:

Value	Description
"S"	Strict levels
"L"	Loose levels
"N"	No levels

If this is a new tree, and you do not set this property, the default value is Strict Levels.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Example

```
If &MyTree.LevelUse = "S" Then
/* add levels */
End-If;
```

LockOwner property: Tree class

Description

This property returns the user ID of the user who has checked out a specific tree or a tree branch, as a string.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

LockStatus property: Tree class

Description

This property indicates if an opened tree is checked out.

Note

In order to use this method, you must have Tree multi-user environment enabled. You can check if it is enabled by using UseUpdateReservation Tree property.

Possible values are:

Value	Description
0	Tree is not checked out by any user.
1	Tree is checked out by another user.
2	Tree is checked out by the current user and is editable.

This property is read-only.

Related Topics

- [LockTree method: Tree class](#)
- [TreeLocksNumber method: Tree class](#)
- [UnlockTree method: Tree class](#)
- [LockOwner property: Tree class](#)

Name property: Tree class

Description

This property returns the name of the tree, as a string.

Note

Do not use this property to change the name of an existing tree. The change will not be reflected in the database. You must use the Rename method to change the name of an existing tree.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Example

```
&TreeName = &MyTree.Name;
```

Related Topics

- [Rename method: Tree class](#)

NodeCollImageName property: Tree class

Description

Use this property to specify the image displayed for a collapsed node. This property takes a string value.

This property is read/write.

NodeCount property: Tree class

Description

This property returns the number of nodes for the tree. A valid tree must have at least one node.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

NodeExpImageName property: Tree class

Description

Use this property to specify the displayed image of an expanded node. This property takes a string value.

This property is read/write.

NodeOnClipboard property: Tree class

Description

Use this property to determine if a node has been cut and is available to be 'pasted' into a tree. This property returns a Boolean value: True if a node object exists on the clipboard, False otherwise.

This property is read-only.

ParentLevel property: Tree class

Description

This property returns the number of the parent branch level in a branched tree. If the tree does not have levels or is an unbranched tree, zero (0) is returned. Valid value range is a number between 0 and 100.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

ParentName property: Tree class

Description

This property returns the name of the parent branch in a branched tree, as a string. If the tree does not have levels, is an unbranched tree, or if the tree is the root level, Null is returned.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

PerformanceMethod property: Tree class

Description

This property sets the method to use for select and join statements used to generate SQL with the tree. This property is used with nVision layouts and Query.

The values for this property are:

Value	Description
"L"	Suppress Join: Use Literal Values.
"S"	Sub-SELECT Tree Selector.
"J"	Join to Tree Selector.
"D"	User Application Defaults.

If this is a new tree, and you do not set this property, the default value "D" is automatically set.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Related Topics

- Tree Manager: Understanding Types of Trees
- PS/nVision: PS/nVision Overview

PerformanceSelector property: Tree class

Description

This property selects the tree selectors for nVision for the tree. This property is used with nVision layouts and Query.

The values for this property are:

Value	Description
"D"	Dynamic Selectors
"S"	Static Selectors

If this is a new tree, and you do not set this property, the default value "S" is automatically set.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Related Topics

- PS/nVision: PS/nVision Overview

PerformanceSelectorOption property: Tree class

Description

This property selects the tree selector options for nVision for the tree. This property is used with nVision layouts and Query.

The values for this property are:

Value	Description
"S"	Single values
"R"	Ranges of values ($\geq \dots \leq$).
"B"	Range of values (BETWEEN).

If this is a new tree, and you do not set this property, the default value "R" is automatically set.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Related Topics

- [PS/nVision: PS/nVision Overview](#)

SetID property: Tree class

Description

This property returns the SetID for the tree, as a string. This property is used only when the IndirectionMethod property for the tree structure the tree is based on has been set to "S". Otherwise, this property returns Null.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Note

PeopleSoft does not recommend setting the SetID for a tree, as there is no way to save this value to the database.

Related Topics

- [IndirectionMethod property: Tree Structure class](#)

Status property: Tree class

Description

This property returns the effective status of the tree. The values are:

Value	Description
"A"	Active
"I"	Inactive

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Structure property: Tree class

Description

This property returns a reference to the tree structure of the tree. Before you can use some of the methods or any of the properties of a tree structure, you must use the Open method to open the tree structure.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read-only.

StructureName property: Tree class

Description

This property returns the name (*structure ID*) of the tree structure the tree is based on, as a string. This property can be set only with a new tree.

Note

Even though this is a writable property, you will receive an error if you try to change the tree structure for an existing tree.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

Related Topics

- [SetID property: Tree class](#)

TreedImageName property: Tree class

Description

Use this property to specify the displayed image for a tree. This property takes a string value.

This property is read/write.

UserKeyValue property: Tree class

Description

Use this property to read the key field value for the Node User Key Field specified from the NodeRecord on the associated tree structure.

This property is used only when the IndirectionMethod property for the tree structure has been set to "U" or "B". Otherwise, this property returns Null.

This property is read/write.

Note

PeopleSoft does not recommend setting the UserKeyValue for a tree, as there is no way to save this value to the database.

Related Topics

- [NodeRecord property: Tree Structure class](#)
- [IndirectionMethod property: Tree Structure class](#)

UseUpdateReservation property: Tree class

Description

This property indicates if multi-user environment features are used. This property returns a Boolean value, true if multi-user environments features are used, false otherwise.

This property can be used with either an open or a closed tree.

This property is read-only.

Tree Structure Class

Tree structure objects are instantiated from the following:

- From a session object with the GetTreeStructure method.
- From a tree object with the Structure property.

See [GetTreeStructure method: Session class](#), [Structure property: Tree class](#).

Tree Structure Class Methods

In this section, we discuss the Tree Structure class methods. The methods are discussed in alphabetical order.

Close method: Tree Structure class

Syntax

```
Close()
```

Description

The Close method closes the tree structure object executing the method, freeing the memory associated with that object, and discarding any changes made to the tree structure. The Close method can be used only on an open tree structure, not on a closed tree structure. This means you must have opened the tree structure with the Open method before you can save it. To save any changes, you must use the Save method before using Close.

Returns

A number; 0 if the method completed successfully.

Copy method: Tree Structure class

Syntax

```
Copy(FromStructId, ToStructId)
```

Description

The Copy method copies the tree structure specified with *FromStructId* to the tree structure specified with *ToStructId*. Both parameters take string values. The tree structure specified by *ToStructId* must be a *new* tree structure. You receive an error if the tree structure already exists.

The Copy method can only be used with a closed tree structure, it cannot be used on an open tree structure. Before you use the Copy method, you must explicitly close any open tree structure objects (with the Close method.) You receive an error if there are any open tree structures.

To access the new tree structure, you must use the Open method.

Returns

A number; 0 if the method completed successfully.

Example

```
&MyTreeStruct = &MySession.GetTreeStructure();  
&RetVal = &MyTreeStruct.Copy(PERSONAL_DATA, PERSONAL_DATA2);
```

Create method: Tree Structure class

Syntax

```
Create(StructId, Type)
```

Description

The Create method creates a tree structure with the name *StructId*, and of the type *Type*. Both parameters take a string value.

Note

If the tree structure already exists, it is overwritten with the newly created tree structure.

The Create method can be used only with a closed tree structure, it cannot be used on an open tree structure. Before you use the Create method, you must explicitly close any open tree structure objects (with the Close method.) You receive an error if there are any open tree structures.

The new tree structure must be saved (using the Save method) for this structure to be saved to the database.

After you create a new tree structure, you can open it with the Open method.

The values for *Type* are:

- "D": create a detail tree structure.
- "S": create a summary tree structure.

Currently, only the value of "D" is supported for the *Type* parameter. You can specify an empty string for *Type*. If you need to create a summary structure follow the example below:

```
&MYSTRUCT=&SESSION.GETSTRUCTURE();  
IF ALL( &MYSTRUCT) THEN  
  &RETVALUE=&MYSTRUCT.CREATE( 'DEPARTMENT_SUM', ' ');  
  IF NONE(&RETVALUE) THEN  
    &MYSTRUCT.TYPE = 'S';  
  END-IF;  
  &RETVALUE=&MYSTRUCT.SAVE();  
  &RETVALUE=&MYSTRUCT.CLOSE();  
END-IF;
```

Delete method: Tree Structure class

Syntax

Delete(*StructId*)

Description

The Delete method deletes the tree structure specified by *StructId* from the database. The Delete method can be used only with a tree structure identifier, it cannot be used on a fully instantiated, open tree structure. Before you use the Delete method, you must explicitly close any open tree structure objects (with the Close method.) You receive an error if there are any open tree structures.

The tree structure specified by *StructId* does not have to match the tree structure identifier executing the method.

Returns

A number: 0 if the method completed successfully.

Open method: Tree Structure class

Syntax

```
Open(StructId, Update)
```

Description

The Open method opens the tree structure specified by *StructId*. *StructId* takes a string value. You cannot read or set any properties of a tree structure until after you open it.

When you open a tree structure, you can specify whether you want to open it for update, or in read-only mode, with the *Update* parameter. *Update* takes a Boolean value. Values for *Update* are:

- "True": open tree structure in update mode (read/write).
- "False": open tree structure in read-only mode.

If you try updating or writing to a tree structure opened in read-only mode, your changes are ignored.

Returns

A number: 0 if the method completes successfully.

Example

```
&MyTreeStruct = &MySession.GetTreeStructure();  
&RetVal = &MyTreeStruct.Open("ACCESS_GROUP", True);
```

Rename method: Tree Structure class

Syntax

```
Rename(FromStructId, ToStructId)
```

Description

The Rename method renames the tree structure specified with *FromStructId* to the new name specified by *ToStructId*. Both parameters take a string value. The tree structure specified by *ToStructId* must be a *new* tree structure. You receive an error if the tree structure already exists. The change is automatically reflected in the database.

The Rename method can only be used with a closed tree structure, it cannot be used on an open tree structure. Before you use the Rename method, you must explicitly close any open tree structure objects (with the Close method.) You receive an error if there are any open tree structures.

Returns

A number: 0 if the method completes successfully.

Save method: Tree Structure class

Syntax

Save()

Description

The Save method writes any changes to the tree structure executing the method to the database.

The Save method can be used only on an open tree structure, not on a closed tree structure. This means you must have opened the tree structure with the Open method before you can save it.

The tree structure object remains open after executing Save. You must execute the Close method on the object before it is closed and the memory freed.

Note

If you're calling the Tree API from an Application Engine program, the data won't actually be committed to the database until the Application Engine program performs a Commit.

Returns

A number: 0 if the method completes successfully.

Tree Structure Class Properties

In this section, we discuss the Tree Structure class properties. The properties are discussed in alphabetical order.

Description property: Tree Structure class

Description

This property returns the description for the tree structure, as a string. The description is the text that displays in list boxes or reports.

This property can be used only with an open tree structure, that is, you must use the Open method on the tree structure before you can use this property.

This property is read/write.

Example

```
&MYTREESTRUCT.Description = "Department Security Chart";
```


DetailComponent property: Tree Structure class

Description

This property returns the name of the detail component for the tree structure as a string.

This property can be used only with an open tree structure, that is, you must use the Open method on the tree structure before you can use this property.

This property is read/write.

DetailField property: Tree Structure class

Description

This property returns the name of the detail field for the tree structure, as a string. This property is valid only if you define a detail tree structure. If you create a node-oriented tree structure, this property is not required. This field must exist on the specified DetailRecord.

This property can be used only with an open tree structure, that is, you must use the Open method on the tree structure before you can use this property.

This property is read/write.

Example

The following example sets the DetailPage, DetailRecord, and DetailField properties for a tree structure. Note that the names of the page, record, and field are all capitalized: this is required for all PeopleSoft page, record, and field names.

```
&MYTREESTRUCT.DetailPage = "BUS_UNIT_TREE_INV";  
&MYTREESTRUCT.DetailRecord = "BUS_UNIT_TBL_IN";  
&MYTREESTRUCT.DetailField = "BUSINESS_UNIT";
```

Related Topics

- [DetailRecord property: Tree Structure class](#)

DetailMenu property: Tree Structure class

Description

This property returns the name of the detail menu for the tree structure, as a string. If the page you use for detail values (DetailPage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the DetailMenu and DetailMenuBar properties.

This property is valid only if you define a detail tree structure. If you create a node-oriented tree structure, this property isn't required.

This property can be used only with an open tree structure, that is, you must use the Open method on the tree structure before you can use this property.

This property is read/write.

DetailMenuBar property: Tree Structure class

Description

This property returns the name of the detail menu bar for the tree structure, as a string. If the page you use for detail values (DetailPage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the DetailMenu and DetailMenuBar properties.

This property is valid only if you're define a detail tree structure. If you create a node-oriented tree structure, this property isn't required.

This property can be used only with an open tree structure, that is, you must use the Open method on the tree structure before you can use this property.

This property is read/write.

DetailMenuItem property: Tree Structure class

Description

This property returns the name of the detail menu item for the tree structure as a string.

This property can be used only with an open tree, that is, you must open the tree using the Open method before you can use this property.

This property is read/write.

DetailMultiNavigate property: Tree Structure class

Description

This property sets or returns a Boolean value indicating whether the detail multi-navigation tree structure navigation option has been selected or not: True, the Detail Multi-Navigation check box has been selected, False otherwise.

This property is read/write.

Related Topics

- [NodeMultiNavigate property: Tree Structure class](#)
- Tree Manager: Using Multinavigation Paths

DetailPage property: Tree Structure class

Description

This property returns the name of the detail page for the tree structure as a string. If the page you use for detail values (DetailPage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the DetailMenu and DetailMenuBar properties.

This property is valid only if you're defining a detail tree structure. If you're creating a node-oriented tree structure, this property isn't required.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Example

The following example sets the DetailPage, DetailRecord, and DetailField properties for a tree structure. Note that the names of the page, record, and field are all capitalized: this is required for all PeopleSoft page, record, and field names.

```
&MYTREESTRUCT.DetailPage = "BUS_UNIT_TREE_INV";  
&MYTREESTRUCT.DetailRecord = "BUS_UNIT_TBL_IN";  
&MYTREESTRUCT.DetailField = "BUSINESS_UNIT";
```

DetailRecord property: Tree Structure class

Description

This property returns the name of the detail record for the tree structure as a string. This property is valid only if you define a detail tree structure. If you create a node-oriented tree structure, this property isn't required.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Example

The following example sets the DetailPage, DetailRecord, and DetailField properties for a tree structure. Note that the names of the page, record, and field are all capitalized: this is required for all PeopleSoft page, record, and field names.

```
&MYTREESTRUCT.DetailPage = "BUS_UNIT_TREE_INV";  
&MYTREESTRUCT.DetailRecord = "BUS_UNIT_TBL_IN";  
&MYTREESTRUCT.DetailField = "BUSINESS_UNIT";
```

IndirectionMethod property: Tree Structure class

Description

The following screen image is an example of Structure tab for Tree Structure setup. When you set up a tree structure, you can set the indirection at the bottom of the Structure tab, with the radio buttons in the Additional Key Field.

The screenshot shows a software interface for configuring a tree structure. It has four tabs: Structure, Levels, Nodes, and Details. The 'Structure' tab is active. The configuration fields are as follows:

- *Structure ID:** BU_PROJ_DATA
- *Description:** Test Tree Keyed by BU
- *Type:** Detail (selected from a dropdown menu)

Below these fields is a section titled 'Additional Key Field' containing four radio button options:

- ☐ SetId Indirection
- ☒ Business Unit
- ☐ User Defined
- ☐ None

In the Tree Classes API, you set these same values with the `IndirectionMethod` property. The values are:

- "S": SetID Indirection.
- "B": Business Unit.
- "U": User Defined Node Key.
- "N": None.

Both the *User Defined Node Key* and the *Business Unit* are the key field set with the `NodeRecord` property for this tree structure. If *Business Unit* is set, the key field set with the `NodeRecord` property is a business unit.

If you are creating a new tree structure, and you do not explicitly set this property, None ("N") is the default value, and is automatically set.

This property can be used only with an open tree structure, that is, you must open the tree structure with the `Open` method before you can use this property.

This property is read/write.

Related Topics

- [IndirectionMethod property: Tree Structure class](#)
- [NodeRecord property: Tree Structure class](#)

KeyName property: Tree Structure class

Description

This property returns the name of the tree structure as a string.

This property can be used with a closed tree structure.

This property is read-only.

LevelComponent property: Tree Structure class

Description

This property returns the name of the level component for the tree structure as a string.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

LevelMenu property: Tree Structure class

Description

This property returns the name of the level menu for the tree structure as a string. If the page you use for level values (LevelPage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the LevelMenu and LevelMenuBar properties.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

LevelMenuBar property: Tree Structure class

Description

This property returns the name of the level menu bar for the tree structure as a string. If the page you use for level values (LevelPage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the LevelMenu and LevelMenuBar properties.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

LevelMenuItem property: Tree Structure class

Description

This property returns the name of the level menu item for the tree structure as a string.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

LevelPage property: Tree Structure class

Description

This property returns the name of the level page for the tree structure object as a string. If you create a new tree structure, and you do not explicitly set this property, `TREE_LEVEL` is the default value, and is automatically set.

This property can be used only with an open tree structure, that is, you must open the tree structure with the `Open` method before you can use this property.

This property is read/write.

LevelRecord property: Tree Structure class

Description

This property returns the name of the level record for the tree structure object as a string. If you create a new tree structure, and you do not explicitly set this property, `TREE_LEVEL_TBL` is the default value, and is automatically set.

This property can be used only with an open tree structure, that is, you must open the tree structure with the `Open` method before you can use this property.

This property is read/write.

Name property: Tree Structure class

Description

This property returns the name of the tree structure as a string. This is also called the *structure ID*. Use this property to set the name (structure ID) of a tree structure. This property is required if you are creating a new tree structure.

Note

Do not use this property to change the name of an existing tree structure. The change will not be reflected in the database. You must use the `Rename` method to change the name of an existing tree structure.

This property can be used only with an open tree structure, that is, you must open the tree structure with the `Open` method before you can use this property.

This property is read/write.

Example

```
&Name = &MYTREESTRUCT.Name;
```

Related Topics

- [Rename method: Tree Structure class](#)

NodeComponent property: Tree Structure class

Description

This property returns the name of the node component for the tree structure as a string.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

NodeField property: Tree Structure class

Description

This returns the name of the field used for storing information about nodes for the tree structure as a string. If you create a new tree structure, and you do not explicitly set this property, TREE_NODE is the default value, and is automatically set. This field must exist on the specified NodeRecord.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Example

```
&MYTREESTRUCT.NodeField = "DEPT_ID";
```

NodeMenu property: Tree Structure class

Description

This property returns the name of the node menu for the tree structure as a string. If the page you use for node values (NodePage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the NodeMenu and NodeMenuBar properties.

If you create a new tree structure, and you do not explicitly set this property, TREE_MANAGER is the default value, and is automatically set.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

NodeMenuBar property: Tree Structure class

Description

This property returns the name of the node menu bar for the tree structure as a string. If the page you use for node values (NodePage property) is part of a component, and you want to have access to the other pages in that group when you edit a node value, enter the name of the menu and menu bar for the component in the NodeMenu and NodeMenuBar properties.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

NodeMenuItem property: Tree Structure class

Description

This property returns the name of the node menu item for the tree structure as a string.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

NodeMultiNavigate property: Tree Structure class

Description

This property sets or returns a Boolean value indicating whether the node multi-navigation tree structure navigation option has been selected: True, the Node Multi-Navigation check box has been selected, False otherwise.

This property is read/write.

Related Topics

- [DetailMultiNavigate property: Tree Structure class](#)
- Tree Manager: Using Multinavigation Paths

NodePage property: Tree Structure class

Description

This returns the name of the page used for storing information about nodes for the tree structure as a string. If you create a new tree structure, and you do not explicitly set this property, TREE_NODE is the default value, and is automatically set.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

NodeRecord property: Tree Structure class

Description

This returns the name of the record used for storing information about nodes for the tree structure as a string. If you create a new tree structure, and you do not explicitly set this property, TREE_NODE_TBL is the default value, and is automatically set.

If the IndirectionMethod property of this tree structure has been set to "U" or "B", use this property to specify the record that the NodeUserKeyField property will use.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Related Topics

- [IndirectionMethod property: Tree Structure class](#)

NodeUserKeyField property: Tree Structure class

Description

Use this property to set the key field from the record specified with NodeRecord for use with the IndirectionMethod. This property is identical to the UserKeyValue property for a tree.

This property is used only when the IndirectionMethod property for the tree structure has been set to "U" or "B". Otherwise, this property returns Null.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Related Topics

- [IndirectionMethod property: Tree Structure class](#)
- [UserKeyValue property: Tree class](#)

SummarySetId property: Tree Structure class

Description

This property returns the SetID for the detail tree whose detail values the summary tree structure as a string summarizes. This property is valid only for Summary tree structures. Otherwise, this property returns Null.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

SummaryLevelNumber property: Tree Structure class

Description

This property returns the level number for the detail tree whose detail values the summary tree structure summarizes. The level number indicates the level in the detail tree whose nodes the summary tree will use as detail values. The top level in the detail tree is 1, the next is level two, and so on. Valid values are numbers between 1 and 99.

This property is only valid for Summary tree structures. Otherwise, this property returns Null.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

SummaryTreeName property: Tree Structure class

Description

This property returns the name of the detail tree whose detail values the summary tree structure summarizes, as a string. This property is valid only for Summary tree structures. Otherwise, this property returns Null.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

SummaryUserKeyValue property: Tree Structure class

Description

This property returns the name of the tree that the node records the tree structure is summarized to, as a string. This property is valid only for Summary tree structures. This property is used only when the IndirectionMethod property for the tree structure has been set to "U" for *User Defined Keys* or "B" for *Business Unit*. Otherwise, this property returns Null.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Related Topics

- [IndirectionMethod property: Tree Structure class](#)

Type property: Tree Structure class

Description

This property returns the type of the tree structure as a string, whether it is a detail or summary tree structure. The values are:

- "D": detail tree structure.
- "S": summary tree structure.

This property can be used only with an open tree structure, that is, you must open the tree structure with the Open method before you can use this property.

This property is read/write.

Traverse Tree Hierarchy Example

The following is an example to transverse a tree hierarchy and write the information to a file.

```
Local ApiObject &TreeObj, &RootNodeObj;  
Local number &Res;  
Local string &sSetId, &sSetCntrlValue, &sTreeName, &sBranchName;  
Local File &MyFile;  
Function ProcessNodeChildren(&ParentNodeObj As ApiObject)  
    Local ApiObject &ChildNodeObj, &ChildLeafObj;
```

```

    Local boolean &First;
    If &ParentNodeObj.HasChildren Then
        &ChildLeafObj = &ParentNodeObj.FirstChildLeaf;
        While All(&ChildLeafObj)
            &MyFile.WriteLine("Process Leaf Range From : " | &ChildLeafObj.Range⇒
From);
            &ChildLeafObj = &ChildLeafObj.NextSib;
        End-While;
        If &ParentNodeObj.HasChildNodes Then
            &First = True;
            &ChildNodeObj = &ParentNodeObj.FirstChildNode;
            While &First Or
                &ChildNodeObj.HasNextSib
                If &First Then
                    &First = False;
                Else
                    &ChildNodeObj = &ChildNodeObj.NextSib;
                End-If;
                &MyFile.WriteLine("Process Node : " | &ChildNodeObj.Name);
                ProcessNodeChildren(&ChildNodeObj);
            End-While;
        End-If;
    End-If;
End-Function;
&TreeObj = %Session.GetTree();

If None(&TreeObj) then
    Error("Cannot get a tree");
End-if;

&sSetId = "";
&sSetCntrlValue = "";
&sTreeName = "QE_JOB_CODES";
&TreeEffDt = Date("1999-01-01");
&sBranchName = "";
&Res = &TreeObj.OPEN(&sSetId, &sSetCntrlValue, &sTreeName, &TreeEffDt,
&sBranch⇒
Name, False);
If All(&Res) Then
    Error("Cannot open a tree");
End-If;
&MyFile = GetFile("TreeDump.txt", "A", "UTF8");
&RootNodeObj = &TreeObj.FindRoot();

&MyFile.WriteLine("Process Root Node : " | &RootNodeObj.Name);

ProcessNodeChildren(&RootNodeObj);
&MyFile.Close();

```

Universal Queue Classes

Understanding Universal Queue Classes

The universal queue classes provide the means by which applications can inspect objects that are processed by the queue server, such as tasks, agents, and queues. The classes also enable tasks to reenter the queue with their original task ID, as well as keep task times based on its original entry into the system.

All of the classes, and most of the properties and methods that make up the universal queue classes have a GUI representation in the PeopleSoft Multi-Channel Framework. This document assumes that the reader is familiar with PeopleSoft Multi-Channel Framework.

Related Topics

- MultiChannel Framework: PeopleSoft MultiChannel Framework

Scope of the Universal Queue Classes

The universal queue classes can be instantiated only from PeopleCode.

The universal queue classes can be called from a component, an internet script, or an Application Engine program.

Universal queue classes can be of Local, Global, or Component scope.

Data Types of the Universal Queue Classes

Every universal queue class is its own data type, that is, Agent objects are declared as data type Agent, LogicalQueue objects are declared as type LogicalQueue, and so on.

The following are the data types of the universal queue classes:

- Agent
- AgentPhysQueueProps
- AgentPhysQueueTasks
- Broadcast
- LogicalQueue
- MCFFactory
- PhysicalQueue
- Task
- TaskList
- Util

How to Import Universal Queue Classes

The universal queue classes are *not* built-in classes, like rowset, field, record, and so on. They are application classes. You must import the universal queue application package before you can use the classes in your PeopleCode program.

An import statement names either all the classes in a package or one particular application class. For importing the universal queue classes, PeopleSoft recommends that you import all the classes in the application package.

The application package PT_MCF_UQAPI contains the following sub-packages:

- Agent
- AgentPhysQueueProps
- AgentPhysQueueTasks
- Broadcast
- LogicalQueue
- MCFFactory
- PhysicalQueue
- Task
- TaskList
- Util

The import statements you should use are as follows:

```
import PT_MCF_UQAPI:Agent:*;  
import PT_MCF_UQAPI:AgentPhysQueueProps:*;  
import PT_MCF_UQAPI:AgentPhysQueueTasks:*;  
import PT_MCF_UQAPI:Broadcast:*;  
import PT_MCF_UQAPI:LogicalQueue:*;  
import PT_MCF_UQAPI:MCFFactory:*;  
import PT_MCF_UQAPI:PhysicalQueue:*;  
import PT_MCF_UQAPI:Task:*;  
import PT_MCF_UQAPI:TaskList:*;  
import PT_MCF_UQAPI:Util:*;
```

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are *not* made available.

Related Topics

- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

How to Create a Universal Queue Object

After you've imported the universal queue classes, you instantiate an object of one of those classes using the constructor for the class and the *Create* function.

The following example creates a new instance of the MCFFactory class, as the variable &MyMCFFactory, with local scope:

```
Local MCFFactory &myMCFFactory = Create MCFFactory ();
```

Related Topics

- [Universal Queue Classes Constructors](#)
You must use the constructor for each class to instantiate an instance of that class. The following are the constructors for the universal queue Classes.

Universal Queue Classes Built-in Functions

PeopleCode Language Reference: DeQueue function

PeopleCode Language Reference: EnQueue function

PeopleCode Language Reference: Forward function

PeopleCode Language Reference: InitChat function

PeopleCode Language Reference: MCFBroadcast function

PeopleCode Language Reference: NotifyQ function

Universal Queue Classes Constructors

You must use the constructor for each class to instantiate an instance of that class. The following are the constructors for the universal queue Classes.

Agent method: universal queue classes class

Syntax

Agent (*AgentID*)

Description

Use the Agent constructor to instantiate an Agent object.

All objects encapsulated by this object are created when the constructor is called.

Note

When an MCFFactory object is created, Agent objects are automatically created. In this case, the number of tasks in the list is limited by the *MAX_TASKLIST_ITEMS* parameter used when creating the MCFFactory object.

Parameters

Parameter	Description
<i>AgentID</i>	Specify a valid AgentID as a string.

Returns

An Agent object.

Example

```
Create Agent(&AgentID);
```

Related Topics

- [Agent Class](#)
Use the agent class to refresh or view the properties, such as the agent ID or buddy list associated with a particular agent.

AgentPhysQueueProps method: universal queue classes class

Syntax

```
AgentPhysQueueProps(AgentID, PhysicalQueueID)
```

Description

Use the AgentPhysQueueProps constructor to instantiate an agent physical queue properties object.

Parameters

Parameter	Description
<i>AgentId</i>	Specify as valid AgentId as a string.
<i>PhysicalQueueId</i>	Specify a PhysicalQueueId as a string.

Returns

An agent physical queue properties object.

Related Topics

- [AgentPhysQueueProps Class](#)
Use the AgentPhysQueueProps class to view the properties of the physical queue assigned to an agent.

AgentPhysQueueTasks method: universal queue classes class

Syntax

```
AgentPhysQueueTasks(AgentID, PhysicalQueueID)
```

Description

Use the AgentPhysQueueTasks constructor to instantiate an agent physical queue task object.

Parameters

Parameter	Description
<i>AgentID</i>	Specify an agent ID as a string.
<i>PhysicalQueueID</i>	Specify a PhysicalQueueID as a string.

Returns

An agent physical queue task object.

Related Topics

- [AgentPhysQueueTasks Class](#)
Use the AgentPhysQueueTasks class to refresh or view the tasks associated with the physical queue assigned to the agent.

Broadcast method: universal queue classes class

Syntax

Broadcast()

Description

Use the Broadcast constructor to instantiate a Broadcast object.

Parameters

None.

Returns

A Broadcast object.

Related Topics

- [Broadcast Class](#)
The Broadcast class has a single method, Broadcast. Use the Broadcast method to broadcast a notification message. You can specify whether to send the message to agents, to a queue, or even system wide.

LogicalQueue method: universal queue classes class

Syntax

LogicalQueue(*LogicalQueueID*)

Description

Use the LogicalQueue constructor to instantiate a LogicalQueue object.

Parameters

Parameter	Description
<i>LogicalQueueID</i>	Specify the ID of a logical queue as a string.

Returns

A LogicalQueue object.

Example

```
Local LogicalQueue &MyLogQueue = Create LogicalQueue(&LogicalQueueID);
```

Related Topics

- [LogicalQueue Class](#)
A logical queue is an application level queue that receives work requests (tasks) relating to an application area, such as chat requests regarding sales information, and routes them to agents capable of handling the work. Use the LogicalQueue class to view the properties for a logical queue.

MCFFactory method: universal queue classes class

Syntax

```
MCFFactory( [MAX_TASKLIST_ITEMS] )
```

Description

Use the MCFFactory constructor to instantiate an MCFFactory object.

Parameters

Parameter	Description
<i>MAX_TASKLIST_ITEMS</i>	Specify the maximum number of tasks loaded on a TaskList.

Returns

An MCFFactory object.

Example

```
Local MCFFactory &myMCFFactory = Create MCFFactory(MAX_TASKLIST_ITEMS);
```

Related Topics

- [MCFFactory Class](#)
The MCFFactory class is the base class of the universal queue classes. Instantiating an object in this class automatically instantiates all the associated universal queue classes. The MCFFactory contains all the logical queues operating on the MCF universal queue. The logical queues are comprised of physical queues. Agents log onto these physical

queues. Tasks are queued to physical queues, and later, assigned and accepted by agents. If agents aren't available on a physical queue to accept the tasks on that queue, the tasks are either escalated or put into overflow.

PhysicalQueue method: universal queue classes class

Syntax

```
PhysicalQueue(PhysicalQueueID)
```

Description

Use the PhysicalQueue constructor to instantiate a PhysicalQueue object. All objects encapsulated by this object are created when the constructor is called.

Note

When an MCFFactory object is created, the PhysicalQueue objects are automatically created. In this case, the number of tasks in the list is limited by the `MAX_TASKLIST_ITEMS` parameter used when creating the MCFFactory object.

Parameters

Parameter	Description
<i>PhysicalQueueID</i>	Specify a physical queue ID as a string.

Returns

A PhysicalQueue object.

Example

```
Local PhysicalQueue &myPhysicalQueue = Create PhysicalQueue(&PhysicalQueueID);
```

Related Topics

- [PhysicalQueue Class](#)
Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

Task method: universal queue classes class

Syntax

```
Task(TaskNumber)
```

Description

Use the Task constructor to instantiate a task object.

Only persistent tasks (email and generic tasks) are available for introspection. Each persistent task goes through a lifecycle that is recorded by the following statuses:

State	Indicated Action	Status of Task Object
Enqueued by the universal queue server	Enqueued	ENQ
Universal queue assigns to physical queue	Assigned	ASGN
Agent accepts task	Accepted	ACPT
Agent completes task	Done	DONE
Task is not accepted within the overflow (action) time period	Overflowed	OVFL
Agent does not complete task or task not assigned within the escalation (complete) time period	Escalated	ESCL
Indeterminate Task (task not found in system)	Indeterminate	IND

Parameters

Parameter	Description
<i>TaskNumber</i>	Specify a task number.

Returns

A task object if the task exists, or an error message if the task number is not in the expected format. If the task number is properly formatted, but the task is not found, the task object is returned with a task status of IND.

Example

```
Local string &tasknumber, &status;  
  
Local Task &myTask = Create Task(&tasknumber);  
  
&status = &myTask.Status;
```

Related Topics

- [Task Class](#)
Use the task class to manipulate tasks or to view the properties of a specific task.

TaskList method: universal queue classes class

Syntax

```
TaskList(Status, TaskType, PhysicalQueueID, AgentID)
```

Description

Use the TaskList constructor to instantiate a task list.

If the queue is not provided, a list of tasks for all physical queues for that *TaskType* and *Status* is returned. To get all tasks on all queues do not specify any of the optional parameters.

Parameters

Parameter	Description
<i>Status</i>	Specify a task status, as an uppercase string. If you do not specify a valid status, an empty tasklist is returned. Valid values are:
Value	Description
ACPT	Accepted
ASGN	Assigned
ENQ	Enqueued
ESCL	Escalated
OVFL	Overflowed
Parameter	Description
<i>TaskType</i>	Specify a task type as a lowercase string. Valid values are:
Value	Description
chat	Chat tasks.
email	Email tasks.
generic	Generic type tasks.
voice	Voice type tasks.
Parameter	Description
<i>PhysicalQueueID</i>	Specify a physical queue ID as a string.
<i>AgentID</i>	Specify an agent ID as a string.

Returns

A task list object.

Example

```
Local string &sStatus;  
  
/* get all enqueued task on the UQ server*/  
  
&sStatus = "ENQ";  
Local TaskList &myTaskList = Create TaskList (&sStatus, "", "", "");
```

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

Util method: universal queue classes class

Syntax

```
Util()
```

Description

Use the Util constructor to instantiate a util object.

Parameters

None.

Returns

A Util object.

Example

```
Create Util();  
  
Local &myUtil = create Util();
```

Related Topics

- [Util Class](#)
The Util class is used to perform certain useful tasks, such as calculating times (so a task will timeout).

Agent Class

Use the agent class to refresh or view the properties, such as the agent ID or buddy list associated with a particular agent.

Related Topics

- MultiChannel Framework: Defining Agents

Agent Methods

In this section, we discuss the agent class methods. The methods are discussed in alphabetical order.

Delete method: Agent class

Syntax

```
Delete()
```

Description

Use the Delete method to delete an agent from the database. You cannot delete an agent that has still has open tasks.

Parameters

None.

Returns

A number. The values are:

Value	Description
0	Agent deleted successfully.
1	Invalid agent ID.
2	Agent has accepted task and cannot be deleted.
3	Other SQL error in executing deletion. Possibly there are errors in the child tables.

Example

```
import PT_MCF_UQAPI:*;  
  &testAgent = create PT_MCF_UQAPI:Agent("QEMGR");  
  /* Delete an UQ Agent definition */  
  &retCode = &testAgent.Delete();
```

Refresh method: Agent class

Syntax

Refresh()

Description

Use the Refresh method to refresh the properties of the agent.

An agent on a queue is processing tasks as they are assigned to them. Use this method to see real-time statistics on how much load an agent has, or possibly before running any metrics.

If you're interested in how tasklists have changed, use the RefreshQTaskList method instead.

Parameters

None.

Returns

None.

Example

The following refreshes all the properties of the agent:

```
&MyAgent.Refresh();
```

Related Topics

- [RefreshQTaskList method: Agent class](#)

RefreshQTaskList method: Agent class

Syntax

```
RefreshQTaskList(PhysQ)
```

Description

Use the RefreshQTaskList method to refresh the task list properties for the specified physical queue.

You might use this method if you're interested in seeing the real-time statistics for a particular tasklist. If you are only interested in an agent's work, use the Refresh method.

Parameters

Parameter	Description
<i>PhysQ</i>	Specify a physical queue ID as a string.

Returns

None.

Example

The following refreshes all task lists on the first physical queue of the agent:

```
&MyAgent.RefreshQTaskList(&myAgent.PhysicalQueueID [1]);
```

Related Topics

- [Refresh method: Agent class](#)

Agent Properties

In this section, we discuss the agent class properties. The properties are discussed in alphabetical order.

AgentID property: Agent class

Description

This property returns the agent ID as a string.

This property is read-only.

AgentProps property: Agent class

Description

This property returns the agent properties associated with this agent as an array of AgentPhysQueueProps objects.

This property is read-only.

Example

The following example returns the workload for physical queue SALES of agent properties object:

```
Local number &i = 1;

While &i < &myAgent.TotalPhysicalQueues
    If &myAgent.AgentProps[&i].PhysicalQueueID = "SALES" Then
        &AgentWorkLoad = &myAgent.AgentProps[&i].WorkLoad
        break;
    End-If;
End-While;
```

Related Topics

- [AgentPhysQueueProps Class](#)
Use the AgentPhysQueueProps class to view the properties of the physical queue assigned to an agent.

AgentTasks property: Agent class

Description

This property returns the agent tasks associated with this agent as an array of AgentPhysQueueTasks objects.

This property is read-only.

Example

The following example returns the task number for the second task on physical queue SALES in the accepted task list:

```
Local Number &i = 1;

While &i < &myAgent.TotalPhysicalQueues
    If &myAgent.AgentProps[&i].PhysicalQueueID = "SALES" then
        &Tasknumber = &myAgent.AgentsTasks
[&i].AcceptedTaskList.Task[2].TaskNumber
        break;
    End-If;
End-While;
```


Related Topics

- [AgentPhysQueueTasks Class](#)
Use the AgentPhysQueueTasks class to refresh or view the tasks associated with the physical queue assigned to the agent.

Buddy property: Agent class

Description

This property returns a list of buddies for this agent, as an array of string.

This property is read-only.

Example

The following example returns the total number of buddies on the list:

```
&BuddyTotal = &myAgent.Buddy.Len;
```

Language property: Agent class

Description

This property returns the list of languages associated with the agent as an array of string.

This property is read-only.

Example

The following code example returns the first language code in the list of languages associated with the agent:

```
&Language = &myAgent.Language[1];
```

Name property: Agent class

Description

This property returns the name of the agent as a string.

This property is read-only.

NickName property: Agent class

Description

This property returns the nick name of the agent as a string.

This property

PhysicalQueueID property: Agent class

Description

This property returns the physical queues to which this agent is assigned as an array of string. This property is read-only.

Example

The following example returns the first physical queue of agent.

```
&PhysicalQueueID = &myAgent.PhysicalQueueID[1];
```

Related Topics

- [PhysicalQueue Class](#)
Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

TotalPhysicalQueues property: Agent class

Description

This property returns the total number of physical queues to which this agent is assigned as a number.

This property is read-only.

Example

```
&TotalPhysicalQueues = &myAgent.TotalPhysicalQueues;
```

Related Topics

- [PhysicalQueue Class](#)
Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

AgentPhysQueueProps Class

Use the AgentPhysQueueProps class to view the properties of the physical queue assigned to an agent.

AgentPhysQueueProps Properties

In this section, we discuss the agent physical queue properties class properties. The properties are discussed in alphabetical order.

AgentID property: AgentPhysQueueProps class

Description

This property returns the agent ID as a string.

This property is read-only.

PhysicalQueueID property: AgentPhysQueueProps class

Description

This property returns the physical queue ID as a string.

This property is read-only.

Example

The following code example returns the physical queue ID for the physical queue of agent.

```
&PhysicalQueueID = &myAgentPhysQueueProps.PhysicalQueueID;
```

Related Topics

- [PhysicalQueue Class](#)
Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

SkillLevel property: AgentPhysQueueProps class

Description

This property returns the skill level as a number.

This property is read-only.

Example

The following code example returns the skill level on physical queue.

```
&SkillLevel = &myAgentPhysQueueProps.SkillLevel;
```

WorkLoad property: AgentPhysQueueProps class

Description

This property returns the maximum work load that can be assigned to the agent, as an integer.

This property is read-only.

AgentPhysQueueTasks Class

Use the AgentPhysQueueTasks class to refresh or view the tasks associated with the physical queue assigned to the agent.

AgentPhysQueueTasks Method

In this section, we discuss the agent physical queue tasks class method Refresh.

Refresh method: AgentPhysQueueTasks class

Syntax

```
Refresh(TaskList)
```

Description

Use the Refresh method to refresh the specified task list.

Parameters

Parameter	Description
<i>TaskList</i>	Specify the task list you want refreshed. You must specify a task list for this parameter.

Returns

None.

Example

The following code example refreshes the accepted task list of the physical queue (&MyAgentPhysQueueTasks) for the agent.

```
&myAgentPhysQueueTasks.Refresh(&myAgentPhysQueueTasks.AcceptedTaskList);
```

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

AgentPhysQueueTasks Properties

In this section, we discuss the agent physical queue tasks class properties. The properties are discussed in alphabetical order.

AcceptedTaskList property: AgentPhysQueueTasks class

Description

This property returns the accepted task list as a task list object.

This property is read-only.

Example

The following code example returns the task number of the first accepted task:

```
&TaskNumber = &myAgentPhysQueueTasks.AcceptedTaskList.Task[1].TaskNumber;
```

AssignedTaskList property: AgentPhysQueueTasks class

Description

This property returns the assigned task list as a task list object.

This property is read-only.

AgentID property: AgentPhysQueueTasks class

Description

This property returns the agent ID as a string.

This property is read-only.

PhysicalQueueID property: AgentPhysQueueTasks class

Description

This property returns the physical queue ID as a string.

This property is read-only.

Example

The following code example returns the physical queue ID for the physical queue of agent.

```
&PhysicalQueueID = &myAgentPhysQueueTasks.PhysicalQueueID;
```

Related Topics

- [PhysicalQueue Class](#)
Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

Broadcast Class

The Broadcast class has a single method, Broadcast. Use the Broadcast method to broadcast a notification message. You can specify whether to send the message to agents, to a queue, or even system wide.

Broadcast Class Method

The following is the description of the Broadcast class method Broadcast.

Broadcast method: Broadcast class

Syntax

```
Broadcast(ClusterID, QueueID, ChannelID, AgentState, AgentPresence, Message,  
MessageSetNumber, MessageNumber, DefaultMessage, SecurityLevel,  
ImportanceLevel, SenderId, NameValueString)
```

Description

Use the Broadcast function to broadcast a notification message. You can specify whether to send the message to agents, to a queue, or even system wide.

Parameters

Parameter	Description
<i>ClusterID</i>	Specify the name of the cluster that you want to broadcast the message to, such as, RENCLSTR_001, as a string.
<i>QueueID</i>	Specify the name of the physical or logical queue that you want to broadcast the message to, such as, SALES, as a string.
<i>ChannelID</i>	Specify the name of the channel, or task, for the broadcast, such as Email, Chat, Voice or Generic, as a string.
<i>AgentState</i>	Specify the state of the agents you want to broadcast the message to, such as Available, as a string.
<i>AgentPresence</i>	Specify the presence of the agents you want to broadcast the message to, such as Active, as a string.
<i>Message</i>	Specify the text of the message you want to broadcast, as a string.
<i>MessageSetNumber</i>	Specify the message set number of a message from the message catalog if you want to broadcast a message from the message catalog. You must also specify values for the <i>MessageNumber</i> and <i>DefaultMessageText</i> parameters if you want to broadcast this type of message. Specify the message set number as a number.
<i>MessageNumber</i>	Specify the message number of a message from the message catalog if you want to broadcast a message from the message catalog. You must also specify values for the <i>MessageSetNumber</i> and <i>DefaultMessageText</i> parameters if you want to broadcast this type of message. Specify the message number as a number.
<i>DefaultMessageText</i>	Specify the text to be used if the specified message catalog message isn't found. Use the <i>MessageSetNumber</i> and <i>MessageNumber</i> parameters to specify the catalog message. Specify the default message text as a string.

Parameter	Description
<i>SecurityLevel</i>	Specify the security level for the broadcast message, as a string.
<i>ImportanceLevel</i>	Specify the importance level of the broadcast message, as a string.
<i>SenderID</i>	Specify the ID of the sender of the broadcast message, as a string.
<i>NameValueString</i>	Specify a string containing name-value pairs specific to your application.

Returns

None.

Example

The following example would broadcast a message to a specific logical queue:

```
import PT_MCF_UQAPI:Broadcast:*;  
Local PT_MCF_UQAPI:Broadcast &BC;  
  
&BC.Broadcast("", "SALES", "", "", "Best of Luck!", "", "", "Default  
Message", ⇒  
  "PRIV1", "URGENT", "Admin", "EffDate, 2005-10-25:12:00:45");
```

Related Topics

- PeopleCode Language Reference: MCFBroadcast function

LogicalQueue Class

A logical queue is an application level queue that receives work requests (tasks) relating to an application area, such as chat requests regarding sales information, and routes them to agents capable of handling the work. Use the LogicalQueue class to view the properties for a logical queue.

LogicalQueue Properties

In this section, we discuss the logical queue class properties. The properties are discussed in alphabetical order.

LogicalQueueID property: LogicalQueue class

Description

This property returns the logical queue ID as a string.

This property is read-only.

PhysicalQueueID property: LogicalQueue class

Description

This property returns all the physical queues associated with this logical queue as an array of PhysicalQueue objects.

This property is read-only.

Example

The following code example returns the physical queue ID for the fourth physical queue.

```
&PhyscalQueueID = &myLogicalQueue.PhysicalQueue[4].PhyscalQueueID;
```

MCFFactory Class

The MCFFactory class is the base class of the universal queue classes. Instantiating an object in this class automatically instantiates all the associated universal queue classes. The MCFFactory contains all the logical queues operating on the MCF universal queue. The logical queues are comprised of physical queues. Agents log onto these physical queues. Tasks are queued to physical queues, and later, assigned and accepted by agents. If agents aren't available on a physical queue to accept the tasks on that queue, the tasks are either escalated or put into overflow.

MCFFactory Property

In this section, we discuss the MCFFactory class property LogicalQueue.

LogicalQueue property: MCFFactory class

Description

This property returns all the logical queues with which this MCFFactory object is associated, as an array of LogicalQueue objects.

This property is read-only.

Example

The following code example returns the physical queue ID for the first physical queue on the logical queue, as well as the total of overflowed tasks on the first physical queue on the logical queue.

```
Local number &TotalTasks;
```

```
Local MCFFactory &myMCFFactory = Create MCFFactory ();
```

```
&PhyscalQueueID = &myMCFFactory.LogicalQueue [1].PhysicalQueue  
[1].PhysicalQueueID;
```

```
&TotalTasks = &myMCFFactory.LogicalQueue [1].PhysicalQueue
```



```
[1].OverflowedTask⇒  
List.Total;
```

PhysicalQueue Class

Logical queues can be partitioned into physical queues for scalability. Use the PhysicalQueue class to refresh and view the properties of a physical queue.

PhysicalQueue Methods

In this section, we discuss the physical queue class methods. The methods are discussed in alphabetical order.

Refresh method: PhysicalQueue class

Syntax

```
Refresh()
```

Description

Use the Refresh method to refresh all the objects in the physical queue.

Parameters

None.

Returns

None.

Example

```
&myPhysicalQueue.Refresh();
```

RefreshTaskList method: PhysicalQueue class

Syntax

```
RefreshTaskList(TaskList)
```

Description

Use the RefreshTaskList method to refresh the specified task list.

Parameters

Parameter	Description
<i>TaskList</i>	Specify the task list you want refreshed. You must specify a task list for this parameter.

Returns

None.

Example

The following code example refreshes the accepted task list for the physical queue.

```
&myPhysicalQueue.RefreshTaskList(&myPhysicalQueue.AcceptedTaskList);
```

PhysicalQueue Properties

In this section, we discuss the physical queue class properties. The properties are discussed in alphabetical order.

AcceptedTaskList property: PhysicalQueue class

Description

This property returns the accepted task list as a task list object.

This property is read-only.

Example

The following code example returns the task number of the first accepted task:

```
&TaskNumber = &myPhysicalQueue.AcceptedTaskList.Task[1].TaskNumber;
```

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

AssignedTaskList property: PhysicalQueue class

Description

This property returns the assigned task list as a task list object.

This property is read-only.

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

Agent property: PhysicalQueue class

Description

This property returns all the agents assigned to the physical queue as an array of agent objects.

This property is read-only.

Example

The following example returns the name of the third agent.

```
&AgentName = &MyPhysicalQueue.Agent[3].Name;
```

BrowserURL property: PhysicalQueue class

Description

This property returns the URL of the browser as a string. The format is that of an absolute URL.

The URL for the REN server that serves this MCF cluster for external clients and for agent chat. The Browser URL may be different from the InternalURL, which should not have to go through any firewall, reverse proxy server or other outward-facing security barrier.

This property is read-only.

Related Topics

- [InternalURL property: PhysicalQueue class](#)

EnqueuedTaskList property: PhysicalQueue class

Description

This property returns the enqueued task list as a task list object.

This property is read-only.

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

EscalatedTaskList property: PhysicalQueue class

Description

This property returns the escalated task list as a task list object.

This property is read-only.

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

InternalURL property: PhysicalQueue class

Description

This property returns the internal URL as a string. The format is that of an absolute URL.

This property is read-only.

Related Topics

- [BrowserURL property: PhysicalQueue class](#)

IsActive property: PhysicalQueue class

Description

This property returns true if the physical queue is active, false otherwise.

This property is read-only.

Example

```
Local LogicalQueue &myLogicalQueue = Create LogicalQueue (&LogicalQueueID);

For &I = 1 to &myLogicalQueue.PhysicalQueue.Len

    &PhysicalQueueID = &myLogicalQueue.PhysicalQueue[&I].PhysicalQueueID;
    &myPhysicalQueue = Create PhysicalQueue (&PhysicalQueueID);

    If &myPhysicalQueue.IsActive Then
        /* do work */
    Else
        /* return error */
    End-If;

End-For;
```

LogicalQueueID property: PhysicalQueue class

Description

This property returns the logical queue ID associated with the physical queue as a string.

This property is read-only.

Example

```
&LogicalQueueID = &myPhysicalQueue.LogicalQueueID;
```

OverflowedTaskList property: PhysicalQueue class

Description

This property returns the overflowed task list as a task list object.

This property is read-only.

Related Topics

- [TaskList Class](#)
Use the task list class to refresh or view a task list.

PhysicalQueueID property: PhysicalQueue class

Description

This property returns the physical queue ID of this physical queue.

This property is read-only.

RENURLID property: PhysicalQueue class

Description

This property returns the ID of the REN server for the MCFFactory as a string.

This property is read-only.

TotalAgents property: PhysicalQueue class

Description

This property returns the total number of agents belonging to this physical queue as a number. They may or may not be logged to the queue at that time.

This property is read-only.

Task Class

Use the task class to manipulate tasks or to view the properties of a specific task.

Task Methods

In this section, we discuss the task class methods. The methods are discussed in alphabetical order.

Close method: Task class

Syntax

`Close(Comment)`

Description

Use the Close method to close the task. Only use this method with overflowed or escalated tasks.

Note

This method does *not* resubmit the task. Use the Enqueue method to resubmit the task, then use this method to close it.

Parameters

Parameter	Description
<i>Comments</i>	Specify any comments you want associated with this closed task. You can specify a null value ("")for this parameter.

Returns

None.

Related Topics

- [Enqueue method: Task class](#)

Enqueue method: Task class

Syntax

```
Enqueue(LogicalQueueID, AgentID, Timeout, ResponseTime, Cost, Priority,  
MinSkill)
```

Description

Use the Enqueue method to add a task to the logical queue that the task was first assigned to. Every task enters the universal queue by being assigned to a logical queue.

Parameters

Parameter	Description
<i>LogicalQueueId</i>	Specify the logical queue that you want to add this task to, as a string. You can specify a null value ("")for this parameter. If no value is provided , the logicalQueueID that is a property of task is used.
<i>AgentID</i>	Specify the agent ID for this task, as a string. You can specify a null value ("")for this parameter. If you specify a null value, the task is given to any available agent. You might expect to use a null for this parameter generally, as most tasks are to be reassigned for random agent allocation. However, there may be cases where a particular agent (such as one who previously worked on this task) might be required to take this task. In this case an agentID is provided

Parameter	Description
<i>Timeout</i>	Specify the time out period for this task as a number of minutes. You can specify a zero for this parameter. If no value is provided, the Timeout property of the task is used. The acceptance timeout is the period of time that an agent has to accept an assigned task (click on the flashing icon on the MultiChannel console). If the task is not accepted within this time, the task is re-enqueued.
<i>ResponseTime</i>	Specify the response time for this task as a number of minutes. You can specify a zero for this parameter. If no value is provided, the ResponseTime property of the task is used. The response time refers to the when a task should be completed by in order to satisfy customer contracts (such as, a platinum customer who requires a response in one day for a email. If by the end of 24 hours the task is not completed, it is escalated or the response time is exceeded.)
<i>Cost</i>	Specify the cost of this task as a number. You can specify a zero for this parameter. This is the cost of the task as set by the application when the task was enqueued. If no cost is set at that time, then the default cost is used.
<i>Priority</i>	Specify the priority of the task as a number. One is the lowest possible priority. Higher numbers indicate high priorities. If no priority is set, the default priority for the task is used.
<i>MinSkill</i>	Specify the minimum skill level required to do this task, as a number. You can specify a zero for this parameter.

Returns

None.

Example

```
&CurrentTask = create Task(&Task_Number);
&CurrentTask.Enqueue(&CurrentTask.PhysicalQueueID, "", &AgentAcceptTime,
&Task⇒
CompleteTime, &CurrentTask.Cost, &CurrentTask.Priority,
&CurrentTask.SkillLevel);
```

Considerations Specifying Time

If no value (zero) is provided for the time parameters (such as *Timeout* or *ResponseTime*) the Timeout or ResponseTime properties from the task are used, respectively. This may cause the time to never occur as it creates a moving deadline. To avoid such a problem the time can be calculated for each task prior to enqueue as shown below.

Note

This logic is not included in the task's enqueue function, so as to allow you the choice for how you want your application to handle this situation.

```
&Utilobj = create Util();
&CurrentTask = create Task(&Task_Number);
&TimeDelta = &Utilobj.GetTimeDiff(&currenttime,
&CurrentTask.EscalationTime) / 60;
&AgentAcceptTime = &Utilobj.GetTimeDiff(&CurrentTask.EnqueueTime, &Current=>
Task.OverflowTime) / 60;
    If AddToDateTime(&currenttime, 0, 0, 0, 0, &AgentAcceptTime, 0) >=
&Current=>
Task.EscalationTime Then
    If &TimeDelta > 0 Then
        &AgentAcceptTime = &TimeDelta;
    Else
/* The current time already exceeds the Escalationn time*/
    End-If;
End-If;
```

Refresh method: Task class

Syntax

```
Refresh()
```

Description

Use the Refresh method to refresh the task properties. If you only want to refresh the status, use the RefreshStatus method.

Parameters

None.

Returns

None.

Example

The following refreshes all the properties of the task:

```
&MyTask.Refresh();
```

Related Topics

- [RefreshStatus method: Task class](#)

RefreshStatus method: Task class

Syntax

```
RefreshStatus()
```

Description

Use the RefreshStatus method to refresh only the status of the task. If you want to refresh all the task properties, use the Refresh method.

Parameters

None.

Returns

None.

Example

The following refreshes the status of the task:

```
&MyTask.RefreshStatus();
```

Related Topics

- [Refresh method: Task class](#)

Task Properties

In this section, we discuss the task class properties. The properties are discussed in alphabetical order.

AgentID property: Task class

Description

This property returns the agent ID as a string.

This property is read-only.

ApplicationData property: Task class

Description

This property returns a string in which data relevant to the task is passed. Typically, for a task, it contains the URL to show when an agent access this task, the subject, and so on. This data is not really useful to the end-user, but only for administrators and for test purposes.

This property is read-only.

Comments property: Task class

Description

Use this property to either set or return the comments associated with this task, as a string.

This property is read/write.

EnqueueTime property: Task class

Description

This property returns the date and time when the task was submitted to the universal queue as a `DateTime` value.

This property is read-only.

EscalationTime property: Task class

Description

This property returns the date and time when the task will be removed from the queue and placed in the escalated pool as a `DateTime` value.

This property is read-only.

Language property: Task class

Description

This property returns the language associated with the task as a string.

This property is read-only.

OriginalTime property: Task class

Description

This property returns the date and time when the task was first submitted to the universal queue as a `DateTime` value. This value is maintained for a task through its various stages and cannot change.

This property is read-only.

OverflowTime property: Task class

Description

This property returns a `DateTime` value representing the date and time when the task has reached the stipulated time during which the universal queue server could not find an agent to accept the task.

This property is read-only.

PhysicalQueueID property: Task class

Description

This property returns the physical queue associated with the task as a string.

This property is read-only.

TiedAgentID property: Task class

Description

This property returns the agent ID of the agent this task is enqueued for as a string.

This property is read-only.

TaskList Class

Use the task list class to refresh or view a task list.

TaskList Method

This section discusses the task list method Refresh.

Refresh method: TaskList class

Syntax

```
Refresh()
```

Description

Use the Refresh method to refresh the task list properties.

Parameters

None.

Returns

None.

Example

The following refreshes all the properties of the task list:

```
&MyTaskList.Refresh();
```

TaskList Properties

This sections discusses all the properties for the task list class. The properties are discussed in alphabetical order.

AgentID property: TaskList class

Description

This property returns the agent ID as a string.

This property is read-only.

PhysicalQueueID property: TaskList class

Description

This property returns the physical queue associated with the task list as a string.

This property is read-only.

Task property: TaskList class

Description

This property returns all of the tasks in the task list as an array of task objects.

This property is read-only.

Example

```
For &I = 1 to &MyTaskList.Total  
    &MyTask = &MyTaskList[&I];  
    /* do work on every task in list */  
End-For;
```

TaskType property: TaskList class

Description

This property returns the task type as a string. A tasklist only contains tasks of a single type. The following are the valid task types for a tasklist:

Value	Description
ACPT	Accepted
ASGN	Assigned
ENQ	Enqueued
ESCL	Escalated
OVFL	Overflowed

This property is read-only.

Total property: TaskList class

Description

This property returns the total number of tasks in the list as a number.

This property is read-only.

Util Class

The Util class is used to perform certain useful tasks, such as calculating times (so a task will timeout).

Util Methods

This section discusses the Util class methods. The methods are discussed in alphabetical order.

GetLogicalQueue method: Util class

Syntax

```
GetLogicalQueue(PhysicalQueueID)
```

Description

Use the GetLogicalQueue to get the logical queue ID for the specified physical queue.

Parameters

Parameter	Description
<i>physicalQueueID</i>	Specify the physical queue ID that you want to find the logical queue for, as a string.

Returns

A string containing the logical queue ID.

Example

The following code example returns the logical queue ID for a given physical queue ID .

```
&LogicalQueueID = &testUtil.GetLogicalQueue(&PhysicalQueueID);
```

GetTimeDiff method: Util class

Syntax

```
GetTimeDiff(DateTime1, DateTime2)
```

Description

Use the GetTimeDiff method to determine the difference between two DateTime values.

Parameters

Parameter	Description
<i>DateTime1</i>	Specify the starting date and time as a DateTime value.
<i>DateTime2</i>	Specify the ending date and time as a DateTime value.

Returns

A number specifying the difference between the two DateTime values (in seconds.)

Example

In the following example, &nPeriod is 15 minutes.

```
&DTM1 = DateTimeValue("10/09/97 10:35:36");
&DTM2 = DateTimeValue("10/09/97 10:50:36");

Local number &nPeriod = &myUtil.GetTimeDiff(&DTM1, &DTM2) / 60;
```

MCFFactory Example

The following is an example of creating an MCFFactory, then traversing the branches to reach elements from different points. It is the loops that are important—any code within the loops is just an example of retrieval.

```
&testMCFFactory = create MCFFactory(100); /* set a maximum number of tasks in
a⇒
task list to 100 */

Local integer &i, &j, &k;
&i = 1;
&j = 1;
&k = 1;
&l = 1;
&m = 1;
&n = 1;

While &j < &testMCFFactory.LogicalQueue.Len + 1
/*looping through the logical queues*/
While &i < &testMCFFactory.LogicalQueue [&j].PhysicalQueue.Len + 1
/*looping through the physical queues*/
/* e.g. Tasklists by physical queues*/
&PhysQID = &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].Physical⇒
QueueID;
&nOvflTaskTotal = &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].Over⇒
```

```

FlowedTaskList.Total;
    While &k < &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].OverFlowed⇒
TaskList.Total + 1
    /*looping through the Tasklist on physical queues*/
    /* e.g. Tasks by physical queues*/
    &tasknum = &testMCFFactory.LogicalQueue [&j].PhysicalQueue [&i].Over⇒
FlowedTaskList.Task [&k].TaskNumber;
    &k = &k + 1;
End-While; /* &k loop */
/*Task List by Agents on a Physical Queue */
    While &l < &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].TotalAgents⇒
    + 1
        While &m < &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].Agent ⇒
[&l].TotalPhysicalQueues + 1
        /* e.g. Workload of agents on physical queues. NOTE: &m and &i
are⇒
        not the same value for the same physical queue.*/
        &AgentMaxWorkload = &testMCFFactory.LogicalQueue
[&j].PhysicalQueue ⇒
[&i].Agent [&l].AgentProps [&m].Workload;
        While &n < &testMCFFactory.LogicalQueue [&j].PhysicalQueue
[&i].Agent ⇒
[&l].AgentsTasks [&m].AcceptedTaskList.Total + 1
        /* e.g. tasks on Agent's accepted list NOTE: &m and &i are
not⇒
        the same value for the same physical queue.*/
        &tasknum = &testMCFFactory.LogicalQueue [&j].PhysicalQueue ⇒
[&i].Agent [&l].AgentsTasks [&m].AcceptedTaskList.Task [&n];
        &n = &n + 1;
        End-While; /* &n Loop - tasks on Phys Q of Agents */
        &n = 1;
        &m = &m + 1;
        End-While; /* &m loop - Phys Q of Agents - convoluted*/
        &m = 1;
        &l = &l + 1;
        End-While; /* &l loop - Agents on Phys Q */
        &i = &i + 1;
        &k = 1;
    End-While; /* &i loop- Physical Queues*/
    &j = &j + 1;
    &i = 1;
End-While; /* &j loop - Logical Queues*/

```

Workflow Notification Classes

Understanding Notification Classes

The Notification classes are used for ad-hoc notification. These classes enable you to create and send a notification to someone. The notifications can either be a PeopleSoft Worklist item or an SMTP email message. The Notification class also stores notifications in a table.

You can also use web services to create Worklist entries, then send notifications of completion using application messages.

The Notification classes can be called from a component, an internet script, or an Application Engine program. The `WSWorklistEntry` class can be used incase you are developing your own `PT_WORKLIST` notification handler.

Most of the classes, as well as most of the properties and methods that make up the Notification classes have a GUI representation in PeopleSoft Workflow. This document assumes that the reader is familiar with PeopleSoft Workflow.

Related Topics

- Workflow Technology: Understanding PeopleSoft Workflow

Scope of the Notification Classes

The Notification classes can be called from a component, an internet script, Integration Broker, or an Application Engine program.

Notification classes can be of Local, Global, or Component scope.

Data Types of the Notification Classes

Every Notification class is its own data type, that is, Notifications are declared as data type Notification, Notification addresses are declared as type NotificationAddress, and so on.

The following are the data types of the Notification classes:

- Notification
- NotificationAddress
- NotificationTemplate
- WorklistEntry
- Worklist
- WSWorkListEntry

How to Import the Notification Classes

The Notification classes are *not* built-in classes, like Rowset, Field, Record, and so on. They are application classes. Before you can use these classes in your PeopleCode program, you must import them to your program.

An import statement names either all the classes in a package or one particular application class. For importing the Notification classes, PeopleSoft recommends that you import all the classes in the application package.

The application package PT_WF_NOTIFICATION contains the following classes:

- Notification
- NotificationAddress
- NotificationTemplate

The application package PT_WF_WORKLIST contains the following classes:

- Worklist
- WorklistEntry
- WSWorkListEntry

The import statements you should use are as follows:

```
import PT_WF_NOTIFICATION:*;  
import PT_WF_WORKLIST:*;
```

Using the asterisks after the package name makes all the application classes directly contained in the named package available. Application classes contained in subpackages of the named package are *not* made available.

Related Topics

- [Understanding Application Classes](#)
You can create Application Packages in Application Designer. These *packages* contain application classes (and may contain other packages also). An application class, at its base level, is just a PeopleCode program. However, using the Application Packages, you can create your own classes, and extend the functionality of the existing PeopleCode classes.

How to Create a Notification Object

After you've imported the Notification classes, you instantiate an object of one of those classes using the constructor for the class and the Create function.

The following example creates a new instance of the WorklistEntry class, as the variable &MyWE, with local scope:

```
Local WorklistEntry &MyWE = Create WorklistEntry();
```

Related Topics

- [Notification Classes Constructors](#)
You must use the constructor for each class to instantiate an instance of that class. The following are the constructors for the Notification classes.

Notification Classes Constructors

You must use the constructor for each class to instantiate an instance of that class. The following are the constructors for the Notification classes.

Notification method: notification classes class

Syntax

```
Notification(NotifyFrom, dtmCreated, language_cd)
```

Description

Use Notification to instantiate a notification object.

Parameters

Parameter	Description
<i>NotifyFrom</i>	Specify the entity the notification is being sent from, as a string. Avoid overusing generic entities with this parameter, as this value, along with the value for <i>dtmCreated</i> are the key to understanding where notifications originated from.
<i>dtmCreated</i>	Specify the date and time the notification is being sent, as a DateTime value. Note: To ensure a unique timestamp for each notification that is sent, you must pass a DateTime value that includes milliseconds. Because the %Datetime system variable always returns 0 for the milliseconds value, use the combination of %Date+%PerfTime instead.
<i>language_cd</i>	Specify the 3-character language code of the current user, as a string.

Returns

A Notification object.

Example

To ensure a unique timestamp for each notification that is sent, you must pass a DateTime value that includes milliseconds to the *dtmCreated* parameter. Because the %Datetime system variable always returns 0 for the milliseconds value, use the combination of %Date+%PerfTime instead.

```
import PT_WF_NOTIFICATION:*;  
import PT_WF_WORKLIST:*;
```

```
Local PT_WF_NOTIFICATION:Notification &MyNotify;
```

```
&MyNotify = create PT_WF_NOTIFICATION:Notification("Workflow_Admin", ⇒  
%Date + %PerfTime, %Language);
```

Related Topics

- [Notification Class](#)
This class is used to send a notification to people or people entities, as channel independent as possible. This enables functionality such as letting a user determine how to receive workflow notifications as a preference. It does not necessarily limit a person or entity to one channel.

NotificationAddress method: notification classes class

Syntax

```
NotificationAddress(Oprid, Description, Language, EmailId, Channel)
```

Description

Use NotificationAddress to instantiate a notification address.

This address is used to build a notification using the Notification class. This class is required if you want to use the Notification data type.

Parameters

Parameter	Description
<i>Oprid</i>	Specify the user ID of the person receiving the notification, as a string.
<i>Description</i>	Specify the description of the entity receiving the notification (distribution group names, people's names, and so on) as a string.
<i>Language</i>	Specify the language code of the entity to be notified as a string.
<i>EmailId</i>	Specify the email address as a string.
<i>Channel</i>	Specify the 'channel' used for the notification, as a string. The values are:
Value	Description
Email	Notification is sent as email
Worklist	Notification is sent as a worklist

Returns

None.

Example

```
import PT_WF_NOTIFICATION: *;
```

```
import PT_WF_WORKLIST:*;  
  
Local NotificationAddress &MyNotify_Addy;  
  
&MyNotify_Addy = Create NotificationAddress(%UserID, &Description, %Language,⇒  
    &EmailID, &Channel);
```

Related Topics

- [NotificationAddress Class](#)
The main purpose of the NotificationAddress is to define an entity to a 'channel', it is concerned at a high level only that a notification was sent.

NotificationTemplate method: notification classes class

Syntax

```
NotificationTemplate(ComponentId, Market, TemplateId, TemplateType)
```

Description

Use NotificationTemplate to instantiate a notification template.

If you're specifying a generic template, the first two parameters do not have to have values, that is, you must specify a Null string ("") instead.

Parameters

Parameter	Description
<i>ComponentId</i>	Specify the name of the component the notification is coming from as a string. To specify a generic template, you must specify a Null string ("") for this value instead.
<i>Market</i>	Specify the name of the market of the component the notification is coming from as a string. To specify a generic template, you must specify a Null string ("") for this value instead.
<i>TemplateId</i>	Specify the template ID as a string.
<i>TemplateType</i>	Specify the type of template as a string. Values are: • G: generic template • C: component template

Returns

An instance of the NotificationTemplate class.

Example

```
import PT_WF_NOTIFICATION:*;  
  
import PT_WF_WORKLIST:*;  
  
Local NotificationTemplate &Notify_Temp;
```

```
/* create a generic template */  
  
&Notify_Temp = Create NotificationTemplate("", "", "MyTemplate", "G");
```

Related Topics

- [Worklist Class](#)
The Worklist class is used to make mass modifications to worklist instances. Modifications to one worklist instance should be performed through the WorklistEntry class.

Worklist method: notification classes class

Syntax

```
Worklist()
```

Description

Use the Worklist method to instantiate a Worklist object.

Parameters

None.

Returns

An instance of the Worklist class.

Example

The following example code creates a worklist.

```
import PT_WF_WORKLIST:*;  
  
Local Worklist &theWorklist = Create Worklist();
```

Related Topics

- [Worklist Class](#)
The Worklist class is used to make mass modifications to worklist instances. Modifications to one worklist instance should be performed through the WorklistEntry class.

WorklistEntry method: notification classes class

Syntax

```
WorklistEntry()
```

Description

Use WorklistEntry to instantiate a WorklistEntry object.

Parameters

None.

Returns

An instance of the WorklistEntry class.

Example

```
import PT_WF_NOTIFICATION:*;  
  
import PT_WF_WORKLIST:*;  
  
Local WorklistEntry &MyWorklistEntry = Create WorklistEntry();
```

Related Topics

- [WorklistEntry Class](#)
This class is used to create and or update a worklist entry.

WSWorklistEntry method: notification classes class

Syntax

```
WSWorklistEntry()
```

Description

Use the WSWorklistEntry constructor to instantiate a WSWorklistEntry object.

The WSWorklistEntry class is primarily used with web services.

Parameters

None.

Returns

A reference to a WSWorklistEntry object.

Related Topics

- [WSWorklistEntry Class](#)
This class is used by web services to create Worklist entries.

Notification Class

This class is used to send a notification to people or people entities, as channel independent as possible. This enables functionality such as letting a user determine how to receive workflow notifications as a preference. It does not necessarily limit a person or entity to one channel.

See [Notification Classes Examples](#).

See Workflow Technology: Understanding Notification Templates.

Notification Class Import Statements

The Notification class imports the following classes:

- NotificationAddress
- WorklistEntry

Here are the import statements:

```
import PT_WF_NOTIFICATION:NotificationAddress;  
  
import PT_WF_WORKLIST:WorklistEntry;
```

Notification Class Method

In this section, we discuss the Notification class method Send.

Send method: Notification class

Syntax

Send()

Description

Use the Send method to send a notification to the entities defined in the NotifyTo, NotifyCC, and NotifyBCC, using the Subject and Message properties.

Parameters

None.

Returns

None.

Related Topics

- Workflow Technology: Understanding PeopleSoft Workflow

Notification Class Properties

In this section, we discuss the Notification class properties. The properties are discussed in alphabetical order.

ContentType property: Notification class

Description

This property returns the content type of the value specified by the Message property, as a string. This property is used only with email Notifications, that is, with SMTP email.

This property is read/write.

Related Topics

- [Message property: Notification class](#)

dtmCreated property: Notification class

Description

This property returns the date and time the notification was created as a DateTime value. Together with NotifyFrom this makes a notification unique.

Related Topics

- [NotifyFrom property: Notification class](#)

EmailReplyTo property: Notification class

Description

If an email is sent as a result of the Send method, this property returns the email reply that should be used, as a string. This property can have a different value from NotifyFrom. This property is valid only with notifications that have "email" specified as the channel.

This property is read/write.

Related Topics

- [Send method: Notification class](#)
- [NotifyFrom property: Notification class](#)

FileNames property: Notification class

Description

This property returns an array of string, populated with the names of any file attachments sent with the notification. This property is valid only with notifications that have "email" specified as the channel.

This property is read/write.

FileTitles property: Notification class

Description

This property returns an array of string, populated with descriptions of any file attachments. The array order *must* be respective to the array order for FileNames, that is, file description matches file name one by one by using the same array index value. This property is valid only with notifications that have "email" specified as the channel.

This property is read/write.

Related Topics

- [FileNames property: Notification class](#)

language_cd property: Notification class

Description

This property returns the 3-character language code used for the notification, as a string. This is used for tracking purposes.

This property is read/write.

Message property: Notification class

Description

This property returns the text of the message sent with the notification as a string.

This property is read/write.

NotifyBCC property: Notification class

Description

This property returns an array of NotificationAddress objects, populated with the email addresses or worklist users of the people the notification is sent to. This list is used for notification information only, that is, the people on this list are generally not responsible for taking action specified by the notification. In addition, when you use the Notification Send method, other recipients cannot see the email addresses and or users that make up this array.

If you want to send a regular CC list, that is, one where the members of the list can see each other, use the NotifyCC property instead.

Related Topics

- [NotifyCC property: Notification class](#)

NotifyCC property: Notification class

Description

This property returns an array of NotificationAddress objects, populated with the email addresses of the people the notification is sent to. This list is used for notification information only, that is, the people on this list are generally not responsible for taking action specified by the notification. When using the Notification Send method, the email address or worklist users of this array are exposed to the recipients of the notification.

If you want to send a blind-CC list, that is, where the members of the list cannot see each other, use the NotifyBCC property instead.

Related Topics

- [NotifyBCC property: Notification class](#)

NotifyFrom property: Notification class

Description

This property returns the ID of the entity sending the notification as a string. For example, ad-hoc workflow uses the current user ID.

This property is read/write.

NotifyGuid property: Notification class

Description

This property returns the GUID of the notification. This is a unique identifier used for tracking purposes only.

This property is read/write.

NotifyTo property: Notification class

Description

This property returns an array of NotificationAddress objects, populated with the email addresses of the people the notification is sent to, and who are responsible for taking action if necessary.

To send the list to additional people, use the NotifyCC or NotifyBCC properties.

Related Topics

- [NotifyBCC property: Notification class](#)
- [NotifyCC property: Notification class](#)

Rte property: Notification class

Description

Use this property to set or return a Boolean value indicating whether to use Rich Text formatting in the notification.

This property is read/write.

SourceComponent property: Notification class

Description

This property returns the name of the source component, that is, that initiated the notification process. This property is used for transaction tracking purposes only. This property is not required.

This property is read/write.

SourceMarket property: Notification class

Description

This property returns the name of the market of the source component, that is, that initiated the notification process. This property is used for transaction tracking purposes only. This property is not required.

This property is read/write.

SourceMenu property: Notification class

Description

This property returns the name of the menu of the source component, that is, that initiated the notification process. This property is used for transaction tracking purposes only. This property is not required.

This property is read/write.

Subject property: Notification class

Description

This property returns the subject used in the email notification as a string.

This property is read/write.

Template property: Notification class

Description

If the notification message originated from a template, this property returns the name of that template, as a string. This property is used for transaction tracking purposes only. This property is not required.

This property is read/write.

NotificationAddress Class

The main purpose of the NotificationAddress is to define an entity to a 'channel', it is concerned at a high level only that a notification was sent.

See [Notification Classes Examples](#).

See Workflow Technology: Understanding Notification Templates.

NotificationAddress Class Properties

In this section, we discuss the NotificationAddress class properties. The properties are discussed in alphabetical order.

Channel property: NotificationAddress class

Description

This property returns the 'channel' used for the notification, as a string. The values are:

Value	Description
Email	Notification is sent as email.
Worklist	Notification is sent as a worklist.

This property is read/write.

Description property: NotificationAddress class

Description

This property returns the description of the entity as a string. Entity descriptions include distribution group names or people's names.

This property is read/write.

EmailId property: NotificationAddress class

Description

This property returns the Email Address of the entity to be notified.

This property is read/write.

Language property: NotificationAddress class

Description

This property returns the language code of the entity to be notified.

This property is read/write.

Oprid property: NotificationAddress class

Description

This property returns the user ID of the person receiving the notification as a string.

This property is read/write.

NotificationTemplate Class

This class is useful for populating the message property of the Notification class.

See *Workflow Technology: Understanding Notification Templates*.

NotificationTemplate Class Methods

In this section, we discuss the NotificationTemplate class methods. The methods are discussed in alphabetical order.

GetAndExpandTemplate method: NotificationTemplate class

Syntax

```
GetAndExpandTemplate(Language, Vars)
```

Description

Use the GetAndExpandTemplate method to expand and map the variables into the Text property of the template.

If this is a component template, you must use the SetupCompVarsAndRcpts method first, before you use this method.

If this is a generic template, you must use the SetupGenericVars method first, before you use this method.

The value returned by the Setup methods must be used as the second parameter for this method.

Parameters

Parameter	Description
<i>Language</i>	Specify the 3-character language code used with the notification.
<i>Vars</i>	Specify the variable representing the XML string returned by either the SetupCompVarsAndRcpts method or the SetupGenericVars method.

Returns

Returns a Boolean value: True if the template expanded properly, False otherwise.

Example

```
import PT_WF_NOTIFICATION:NotificationTemplate;

Local NotificationTemplate & mynotifytemplate;

&mynotifytemplate = create NotificationTemplate(%Component, %Market,
&template⇒
Name, "C");

&xmlVars = &mynotifytemplate.SetupCompVarsAndRcpts(GetLevel0());

&mynotifytemplate.GetAndExpandTemplate(%Language, &xmlVars);
```

Related Topics

- [SetupCompVarsAndRcptsLevel1 method: NotificationTemplate class](#)
- [SetupGenericVars method: NotificationTemplate class](#)

SetupCompVarsAndRcpts method: NotificationTemplate class

Syntax

```
SetupCompVarsAndRcpts(&Rowset_Context)
```

Description

Use the SetupCompVarsAndRcpts method to set up variables for the component from the provided rowset. This method also sets up any additional recipients defined in the component.

The rowset corresponds to the component that the notification template was instantiated with. For example, if you created a notification template for JOB, the rowset used with this method should be based on the JOB component.

If you want to expand a component template, you must use this method first, before expanding the template.

Parameters

Parameter	Description
<i>&Rowset_Context</i>	Specify an already instantiated and populated rowset containing the necessary variables.

Returns

A string containing XML that is used by the GetAndExpandTemplate method.

Example

```
import PT_WF_NOTIFICATION:NotificationTemplate;

Local NotificationTemplate & mynotifytemplate;

&mynotifytemplate = create NotificationTemplate(%Component, %Market,
&template⇒
Name, "C");

&xmlVars = &mynotifytemplate.SetupCompVarsAndRcpts(GetLevel0());

&mynotifytemplate.GetAndExpandTemplate(%Language, &xmlVars);
```

Related Topics

- [GetAndExpandTemplate method: NotificationTemplate class](#)

SetupCompVarsAndRcptsLevel1 method: NotificationTemplate class

Syntax

```
SetupCompVarsAndRcptsLevel1(&Rowset_Context, row_num)
```

Description

Use the SetupCompVarsAndRcpts method to set up variables for the component from the provided rowset. This method also sets up any additional recipients defined in the component.

The rowset corresponds to the component that the notification template was instantiated with. For example, if you created a notification template for JOB, the rowset used with this method should be based on the JOB component.

If you want to expand a component template, you must use this method first, before expanding the template.

Parameters

Parameter	Description
<i>&Rowset_Context</i>	Specify an already instantiated and populated Rowset object containing the necessary variables.
<i>row_num</i>	Specify the row number as a number value.

Returns

A string containing XML that is used by the GetAndExpandTemplate method.

Related Topics

- [GetAndExpandTemplate method: NotificationTemplate class](#)

SetupGenericVars method: NotificationTemplate class

Syntax

```
SetupGenericVars(&AryValues)
```

Description

Use the SetupGenericVars method to pass values to a generic template.

To expand a generic template, you must use this method first, before expanding the template.

Parameters

Parameter	Description
<i>&AryValues</i>	Specify an array of string containing values used with the expanded template.

Returns

A string containing XML that is used by the GetAndExpandTemplate method.

Example

```
import PT_WF_NOTIFICATION:NotificationTemplate;

. . .

&mynotifytemplate = create NotificationTemplate("", "", "MYTEMPLATE", "G");

/* Populate an array to contain the values needed by */
/* the template */
&aryValues = CreateArrayRept("", 0);
&aryValues.Push("FIRST VALUE");
&aryValues.Push("SECOND VALUE");
&xmlVars = &mynotifytemplate.SetupGenericVars(&aryValues);
&mynotifytemplate.GetAndExpandTemplate(%Language, &xmlVars);
```

Related Topics

- [GetAndExpandTemplate method: NotificationTemplate class](#)

NotificationTemplate Class Properties

In this section, we discuss the NotificationTemplate class properties. The properties are discussed in alphabetical order.

ComponentId property: NotificationTemplate class

Description

This property returns a component for the component type notification template as a string. This is not required for generic templates.

This property is read/write.

Instruction property: NotificationTemplate class

Description

This property returns the notification instructions as a string.

This property is read/write.

Language property: NotificationTemplate class

Description

This property returns the language used to retrieve template descriptions, as a string.

This property is read/write.

Market property: NotificationTemplate class

Description

This property returns the market for component type notification templates as a string. This is not required for generic templates.

This property is read/write.

Priority property: NotificationTemplate class

Description

This property returns the priority of the notification template as a string.

This property is read/write.

Responses property: NotificationTemplate class

Description

This property is populated only if there are any RIMM responses.

This property is read/write.

Subject property: NotificationTemplate class

Description

This property returns the subject of the notification template as a string.

This property is read/write.

TemplateId property: NotificationTemplate class

Description

This property returns the template ID as a string. If you are creating a notification template, this property is always required.

This property is read/write.

TemplateType property: NotificationTemplate class

Description

This property returns the template type as a string. Values are:

Value	Description
C	Component
G	Generic

If you are creating a notification template, this property is always required.

This property is read/write.

Text property: NotificationTemplate class

Description

This property returns the Template Text as a string.

This property is read/write.

Worklist Class

The Worklist class is used to make mass modifications to worklist instances. Modifications to one worklist instance should be performed through the WorklistEntry class.

See [Worklist method: notification classes class](#).

Worklist Class Method

In this section, we discuss the Worklist class method Reassign.

Reassign method: WorkList class

Syntax

```
Reassign(FromOperid, ToOperid)
```

Description

Use the Reassign method to reassign all worklist items with a state less than “Worked” from one user to another.

If you only want to reassign a single worklist entry, use the Reassign WorklistEntry class method.

Parameters

Parameter	Description
<i>FromOperid</i>	Specify the user ID of the user from which you want to assign a worklist, as a string.
<i>ToOperid</i>	Specify the user ID of the user to which you want to assign a worklist, as a string.

Returns

A Boolean value: true if worklist was assigned successfully, false otherwise.

Related Topics

- [Reassign method: WorklistEntry class](#)

WorklistEntry Class

This class is used to create and or update a worklist entry.

See [Creating a WorklistEntry](#).

See [Updating a WorklistEntry](#).

See Workflow Technology: Understanding PeopleSoft Workflow.

WorklistEntry Class Methods

In this section, we discuss the WorklistEntry class methods. The methods are discussed in alphabetical order.

Create method: WorklistEntry class

Syntax

```
Create()
```

Description

Use the Create method to create a new WorklistEntry object.

This method is *not* the same as the Create *constructor*. The Create constructor only creates an instance of the WorklistEntry class. To add the entry to the database, you must use this method.

The following properties must be set before calling this method:

- busactivity
- buseventname
- busprocname
- worklist

If this method completes successfully, the following properties are populated:

- instanceid
- transactionid

Parameters

None.

Returns

This method returns a numeric value: 0 if there is an error, nonzero if entry created successfully.

Example

```
import PT_WF_WORKLIST: *;
```

```
Local WorklistEntry &worklist;  
Local Number &Rslt;  
  
&worklist = create WorklistEntry();  
  
&worklist.busprocname = "Administer Workflow";  
&worklist.busactivity = "Send Note";  
&worklist.buseventname = "Worklist Note";  
&worklist.worklistname = "Worklist Note";  
  
&Rslt = &worklist.Create();
```

Related Topics

- [busactivity property: WorklistEntry class](#)
- [buseventname property: WorklistEntry class](#)
- [busprocname property: WorklistEntry class](#)
- [instanceid property: WorklistEntry class](#)
- [transactionid property: WorklistEntry class](#)

GetResponseStatus method: WorklistEntry class

Syntax

```
GetResponseStatus()
```

Description

Use the GetResponseStatus method to return the response status of the callback method. This is useful only for entries that are created by web services.

The following properties must be set before calling this method:

- busactivity
- buseventname
- busprocname
- requestmessageid
- worklistname

Parameters

None.

Returns

A number. Valid values are:

Value	Description
0	CreateWorklistEntry message not received yet or this entry was not created by any web service.

Value	Description
1	Message received but not processed yet.
2	Message processed and sent to message queue.
3	Error while sending message to the caller of create worklist entry.
4	Message was sent to the originating web server and was received successfully.

Reassign method: WorklistEntry class

Syntax

`Reassign(Operid)`

Description

The Reassign method assigns the worklist in the data buffers to the user specified by *Operid*. This method commits the version of the worklist entry in the data buffer to the database using the Save method.

If you want to reassign an entire worklist, use the Reassign Worklist class method.

Note

You must use the SelectByKey method to populate data buffers with the worklist entry.

Parameters

Parameter	Description
<i>Operid</i>	Specify the user ID to which you want to assign the worklist entry, as a string.

Returns

A Boolean value: true if the reassignment was successful, false otherwise.

Example

```
import PT_WF_WORKLIST:WorklistEntry;

Local WorklistEntry &wl = create WorklistEntry();
&wl.busprocname = WF_WORKLIST_VW2.BUSPROCNAME;
&wl.busactivity = WF_WORKLIST_VW2.ACTIVITYNAME;
&wl.buseventname = WF_WORKLIST_VW2.EVENTNAME;
&wl.worklistname = WF_WORKLIST_VW2.WORKLISTNAME;
&wl.instanceid = WF_WORKLIST_VW2.INSTANCEID;

If (&wl.SelectByKey()) Then
    If Not (&wl.Reassign("TOPUSER2")) Then
```

```
        /* Reassign error */  
    End-If;  
Else  
    /* SelectByKey error */  
End-If;
```

Related Topics

- [Reassign method: WorkList class](#)

Save method: WorklistEntry class

Syntax

Save()

Description

Use the Save method to save a WorklistEntry to the database.

Parameters

None.

Returns

A numeric value: 0 if save didn't complete successfully, nonzero if save completed successfully.

Example

```
If (&worklist.Save() <> 0) Then  
    /* success */  
Else  
    /* handle error */  
End-If;
```

PeopleCode Event Considerations

You must include this method within events that allow database updates. This includes the following PeopleCode events:

- SavePreChange (Page)
- SavePostChange (Page)
- Workflow
- FieldChange

If this method results in a failure, all database updates are rolled back. All information the user entered into the component is lost, as if the user pressed ESC.

Considerations Using Web Services

This method saves the instance of the worklist to the database. If the worklist entry is marked as worked, (that is, if inststatus property is set to 2) and the worklist entry was originally created by a web service, the originating requestor is sent a response when this method is

executed. If the requestor is expecting additional data, use the `SaveWithCustomData` method instead.

Related Topics

- [Update method: WorklistEntry class](#)
- [SaveWithCustomData method: WorklistEntry class](#)
- [inststatus property: WorklistEntry class](#)

SaveWithCustomData method: WorklistEntry class

Syntax

```
SaveWithCustomData(&Message, &FieldNameArray, &FieldValueArray)
```

Description

Use the `SaveWithCustomData` method to save the worklist entry to the database, as well as to pass additional data back to the requestor that created this worklist entry. You should only use this method with worklist entries that are created by web service. If you want to save a worklist entry without additional data, or a worklist entry that was not created using a web service, use the `Save` method instead.

If the worklist entry was not created by a web service, or if the worklist entry is not marked as worked (that is, if the `inststatus` property is not set to 2,) the additional data is ignored.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated and populated response message containing the custom data to be sent back to the originating web service.
<i>&FieldNameArray</i>	Specify an already instantiated and populated array of string containing the field names to be used by the web service that created the worklist entry.
<i>&FieldValueArray</i>	Specify an already instantiated and populated array of string containing matching field values to be used by the web service that created the worklist entry.

Returns

A message object containing the final message that was sent to the web service if successful, a null object otherwise.

PeopleCode Event Considerations

You must include this method within events that allow database updates. This includes the following PeopleCode events:

- `SavePreChange (Page)`
- `SavePostChange (Page)`
- `Workflow`

- Message Subscription (the Integration Broker INotificationHandler interface)
- FieldChange

If this method results in a failure, all database updates are rolled back. All information the user entered into the component is lost, as if the user pressed **ESC**.

Related Topics

- [Save method: WorklistEntry class](#)
- [inststatus property: WorklistEntry class](#)

SelectByKey method: WorklistEntry class

Syntax

SelectByKey()

Description

The SelectByKey method uses the key field values that have been assigned to build and execute a Select SQL statement. The field values are then fetched from the database SQL table into the worklist entry and the Select statement is closed.

If you don't specify all the key fields, those you exclude are added to the Where clause with the condition equal to a blank value. If not all keys are set and more than one row is retrieved, you won't receive an error and SelectByKey won't fetch any data.

For worklist entries that were created by web services, use the SelectByMessageId method instead.

Parameters

None.

Returns

A Boolean value: true if the properties are set based on the database values, false otherwise.

Related Topics

- [SelectByMessageId method: WorklistEntry class](#)

SelectByMessageId method: WorklistEntry class

Syntax

SelectByMessageId()

Description

Use the SelectByMessageId method to select a worklist entry by the message id. This is useful only for entries that are created by web services.

The following properties must be set before calling this method:

- busactivity
- buseventname

- busprocname
- requestmessageid
- worklistname

Parameters

None.

Returns

A Boolean value: true if this method completes successfully, false otherwise.

Related Topics

- [SelectByKey method: WorklistEntry class](#)

Update method: WorklistEntry class

Syntax

Update()

Description

Use the Update method to update the worklist entry with any property values that have changed, and assign values to the associated record in the database. However, this method does not commit the changes to the record in the database. You must use the Save method to update the database.

Parameters

None.

Returns

A numeric value: 0 if update didn't complete successfully, nonzero if update completed successfully.

Example

```
If (&worklist.Update() <> 0) Then
    &worklist.inststatus = "2" /* mark entry worked */
    /* additional processing */
End-if;
```

Related Topics

- [Save method: WorklistEntry class](#)

WorklistEntry Class Properties

In this section, we discuss the WorklistEntry class properties. The properties are discussed in alphabetical order.

actiondtm property: WorklistEntry class

Description

This property returns the Worklist action date and time as a DateTime value.

This property is read/write.

busactivity property: WorklistEntry class

Description

This property returns the source activity name of the source business process as a string.

This property is read/write.

buseventname property: WorklistEntry class

Description

This property returns the source event name of the source activity as a string.

This property is read/write.

busprocname property: WorklistEntry class

Description

This property returns the source business process name as a string.

This property is read/write.

commentshort property: WorklistEntry class

Description

This property returns the short comment the previous user ID gave when reassigning a worklist as a string.

This property is read/write.

do_replicate_flag property: WorklistEntry class

Description

This property returns a flag that indicates if the worklist entry must be replicated. Values are:

Value	Description
Y	Worklist entry needs to be replicated
N	Worklist entry does not need to be replicated

This property is read/write.

instanceid property: WorklistEntry class

Description

This property returns the Instance Id. This property is used with the following properties to make the worklist entry a unique number:

- busprocname
- busactivity
- buseventname
- worklistname

This property is read/write.

instselecteddtm property: WorklistEntry class

Description

This property returns the date and time that the worklist was selected to be worked as a DateTime value.

This property is read/write.

inststatus property: WorklistEntry class

Description

This property returns the Worklist Entry status as a string. The values are:

Value	Description
0	new worklist entry
1	selected worklist entry
2	worked worklist entry
3	cancel string

This property is read/write.

insttimeoutdtm property: WorklistEntry class

Description

This property returns the date and time the worklist entry timed out as a DateTime value. Only some worklist types use this property.

This property is read/write.

instworkeddtm property: WorklistEntry class

Description

This property returns the date and time the worklist was worked as a DateTime value.

This property is read/write.

IsCreatedViaWebService property: WorklistEntry class

Description

This property returns a Boolean value: true if the WorklistEntry object was created from a web service, false otherwise.

This property is read-only.

oprid property: WorklistEntry class

Description

This property returns the user ID that is assigned the worklist as a string.

This property is read/write.

originatorid property: WorklistEntry class

Description

This property returns the user ID that caused the worklist to be created as a string.

This property is read-only.

prevoprid property: WorklistEntry class

Description

This property returns the previous user ID who used this worklist entry as a string.

This property is read/write.

requestmessageid property: WorklistEntry class

Description

This property is used with worklist entries that are created by web services. It contains the original message ID from the requesting party.

This property is read/write.

ResponseStatus property: WorklistEntry class

Description

This property returns the status of the response sent to the originating web service.

Valid values are:

Value	Description
0	CreateWorklistEntry message not received yet or this entry was not created by any web service.
1	Message received but not processed yet.
2	Message processed and sent to message queue.
3	Error while sending message to the caller of create worklist entry.
4	Message was sent to the originating web server and was received successfully.

This property is read/write.

syncid property: WorklistEntry class

Description

This property is reserved for future use.

This property is read/write.

timeout property: WorklistEntry class

Description

This property returns the status flag if the worklist has timed out. Values are:

Value	Description
Y	Worklist has timed out
N	Worklist has not timed out

This property is read/write.

transactionid property: WorklistEntry class

Description

This property returns the transaction Id as a number, which represents the unit of work. This can be useful for pooled worklists.

This property is read/write.

url property: WorklistEntry class

Description

This property returns the URL to work for the worklist as a string. This is used only for replicating worklist entries across PeopleSoft databases.

This property is read/write.

wl_priority property: WorklistEntry class

Description

This property returns the priority of the worklist as a string. The values are:

Value	Description
low	Worklist has low priority.
medium	Worklist has medium priority.
high	Worklist has high priority.

This property is read/write.

wldaystoselect property: WorklistEntry class

Description

This property returns the number of days to select worklist as a number.

This property is read/write.

wldaystowork property: WorklistEntry class

Description

This property returns the number of days to work the worklist as a number.

This property is read/write.

worklistname property: WorklistEntry class

Description

This property returns the source worklist name for the source event string as a string.

This property is read/write.

WSWorklistEntry Class

This class is used by web services to create Worklist entries.

This class implements the Integration Broker class IRequestHandler.

Related Topics

- Integration Broker: Understanding Sending and Receiving Messages

WSWorklistEntry Class Methods

The following are the WSWorklistEntry class methods, in alphabetical order.

OnError method: WSWorklistEntry class

Syntax

```
OnError(&Message)
```

Description

Use the OnError method to do error handling. This method implements the Integration Broker IRequestHandler interface OnError method.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated and populated message object. This would normally be the message that was used to generate the worklist entry from the web service.

Returns

Depends on implementation.

Related Topics

- [Understanding Message Classes](#)
You can create the following types of messages using PeopleSoft Pure Internet Architecture::
- [Understanding theSOAPDoc Class](#)
The Simple Object Access Protocol (SOAP) is a lightweight protocol for defining synchronous messages in a distributed Web environment. It's an XML based protocol that can be used in combination with other protocols such as HTTP using URLs as endpoints for a message. SOAP is an application of XML and XML namespaces and optionally uses XML Schemas.
- Integration Broker: Understanding Sending and Receiving Messages

OnNotify method: WSWorklistEntry class

Syntax

```
OnNotify(&Message)
```

Description

Use the OnNotify method to creates the worklist entry and the application worklist record.

This method implements the Integration Broker INotificationHandler interface OnNotify method.

Parameters

Parameter	Description
<i>&Message</i>	Specify an already instantiated and populated message object. Generally this would be the originating message that created the worklist entry.

Returns

None.

Related Topics

- [Integration Broker: Understanding Sending and Receiving Messages](#)

WSWorklistEntry Class Properties

The following describes the WSWorklistEntry class properties, in alphabetical order.

InstanceID property: WSWorklistEntry class

Description

This property returns the instance ID for the worklist entry, as a string.

This property is read-only.

TransactionID property: WSWorklistEntry class

Description

This property returns the transaction ID for the worklist entry, as a string.

This property is read-only.

Notification Classes Examples

The following are example of typical actions you perform using the notification classes.

See [Workflow Technology: Understanding Notification Templates](#).

Creating a WorklistEntry

The following example creates a WorklistEntry.

The following is the complete code sample: the steps explain each line.

```
import PT_WF_WORKLIST:*;  
  
Local WorklistEntry &worklist;  
  
&worklist = create WorklistEntry();
```



```

&worklist.busprocname = "Administer Workflow";
&worklist.busactivity = "Send Note";
&worklist.buseventname = "Worklist Note";
&worklist.worklistname = "Worklist Note";

If (&worklist.Create() <> 0) Then
    &worklist.oprid = %UserId;
Else
    /* handle error */
End-If;

If (&worklist.Save() <> 0) Then
    /* success, create a corresponding row in */
    /* application worklist record... */
Else
    /* handle error */
End-If;

```

To create a WorklistEntry:

1. Import the WorklistEntry class.

You must import the WorklistEntry class before you can use it in your PeopleCode program. In addition, the second line declares the variable &worklist as type WorklistEntry.

```

import PT_WF_WORKLIST:*;

Local WorklistEntry &worklist;

```

2. Instantiate a WorklistEntry object.

Using the constructor, create an instance of the WorklistEntry class. This does *not* create a WorklistEntry. This creates a WorklistEntry object only. You must use the Create method to actually create the WorklistEntry in the system.

```

&worklist = create WorklistEntry();

```

3. Set the required parameters.

Some of the WorklistEntry class properties are required for every WorklistEntry. You must set a value for these properties before you can update or save the WorklistEntry.

```

&worklist.busprocname = "Administer Workflow";
&worklist.busactivity = "Send Note";
&worklist.buseventname = "Worklist Note";
&worklist.worklistname = "Worklist Note";

```

4. Create the WorklistEntry.

After you've set the required values, you need to create the WorklistEntry in the system. This does *not* update the database. This does, however, add values to the notification tables.

If this method completes successfully, the following properties are populated: instanceid and transactionid.

- instanceid

- transactionid

```
If (&worklist.Create() <> 0) Then
    &worklist.oprid = %Userid;
Else
    /* handle error */
End-If;
```

5. Save the WorklistEntry.

After you've created the WorklistEntry, save it. The Save method actually updates the database, and so can be used only in events that allow database updates.

```
If (&worklist.Save() <> 0) Then
    /* success, create a corresponding row in */
    /* application worklist record... */
Else
    /* handle error */
End-If;
```

Updating a WorklistEntry

The following example updates a WorklistEntry so that it is considered worked.

The following is the complete code sample: the steps explain each line.

```
import PT_WF_WORKLIST:*;

Local WorklistEntry &worklist;

&worklist = create WorklistEntry();
&worklist.busprocname = "Administer Workflow";
&worklist.busactivity = "Send Note";
&worklist.buseventname = "Worklist Note";
&worklist.worklistname = "Worklist Note";
&worklist.instanceid = 2;

&ret = &worklist.SelectByKey();

&worklist.inststatus = "2"; /* mark entry worked */
If (&worklist.Update() <> 0) Then
    If (&worklist.Save() <> 0) Then
        /* success */
    Else
        /* handle error */
    End-If;
Else
    /* handle error */
End-If;
```

To update a WorklistEntry:

1. Import the WorklistEntry class.

You must import the `WorklistEntry` class before you can use it in your PeopleCode program. In addition, the second line declares the variable `&worklist` as type `WorklistEntry`.

```
import PT_WF_WORKLIST:*;

Local WorklistEntry &worklist;
```

2. Instantiate a `WorklistEntry` object.

Using the constructor, create an instance of the `WorklistEntry` class. This does *not* create a `WorklistEntry`. This creates a `WorklistEntry` object only. You must use the `Create` method to actually create the `WorklistEntry` in the database tables, and the `Save` method to update the tables.

```
&worklist = create WorklistEntry();
```

3. Set the required parameters.

Some of the `WorklistEntry` class properties are required for every `WorklistEntry`. You must set a value for these properties before you can update or save the `WorklistEntry`. The `instanceid` property, combined with the other properties, indicates a unique `WorklistEntry`. This value is populated after a `WorklistEntry` has already been created.

```
&worklist.busprocname = "Administer Workflow";
&worklist.busactivity = "Send Note";
&worklist.buseventname = "Worklist Note";
&worklist.worklistname = "Worklist Note";
&worklist.instanceid = 2;
```

4. Populate the worklist entry with data.

After you've set the keys, populate the worklist entry based on those keys using the `SelectByKey` method.

```
&ret = &worklist.SelectByKey();
```

5. Update and save the `WorklistEntry`.

After you've set the required parameters, try to update the `WorklistEntry`. If that is successful, mark the `WorklistEntry` as 'worked', and try to save the `WorklistEntry`. The `Save` method actually updates the database, and so can be used only in events that allow database updates.

```
If (&worklist.Update() <> 0) Then
    &worklist.inststatus = "2" /* mark entry worked */
    If (&worklist.Save() <> 0) Then
        /* success */
    Else
        /* handle error */
    End-If;
Else
    /* handle error */
End-if;
```

XmlDoc Classes

Understanding XmlDoc Classes

The Extended Markup Language (XML) describes a class of data objects called XML documents. It also partially describes the behavior of computer programs which process them. The XmlDoc class is used to create and manipulate XML data.

The Extended Markup Language (XML) is a method for putting structured data in a text file. Like HTML, XML uses tags, that is, text delimited by brackets (< and >). However, HTML specifies what each tag is, and how it's supposed to be displayed in a browser. XML uses tags only to delimit data. The interpretation of that data is entirely up to the application.

For example, in HTML specifies an unordered (bulleted) list. However, with XML, it could specify an underlined link.

Each XML document has both a physical and a logical structure:

- Physically, the XML document is composed of units called *entities*. A document begins in a "root" or document entity.
- Logically, the XML document is composed of declarations, elements, comments, character references, and processing instructions

The CreateXmlDoc function creates an XmlDoc object. An XmlDoc is composed of XmlNode objects. Each XmlNode represents an XML document *entity*. You can use PeopleCode to create the following types of entities:

- Attribute (specified both by a name and a NamespaceURI)
- CDATA Section
- Comment
- Element
- Entity References
- Process Instruction
- Text

When to Use an XmlDoc Object

You can use the XmlDoc class to access inbound messages. You can also use the XmlDoc class to create XML messages to be sent out, either synchronously or asynchronously.

All messages must be associated with a message definition. An XmlDoc message must be associated with an *unstructured* or nonrowset-based message, that is, a message definition that's created without any record definitions.

Use the XmlDoc object if any of the following is true:

- Your message structure doesn't fit the rowset model.

- Your message data doesn't come from database records.
- Your third-party source or target node requires non-XML messages.
- Your message uses the SOAP protocol.

Do *not* use the XmlDoc object if your message contains cookies.

XmlDoc Object Creation

Use the CreateXmlDoc function to create an XmlDoc object. You can create either an empty object, and populate it with data, or you can specify an XML string that is then transformed into an XmlDoc object that you can then manipulate with PeopleCode.

If you're creating an empty XmlDoc object, and you also want to specify a particular document type declaration (DTD) to be used to validate your XML, immediately after you use the CreateXmlDoc function, you should use the CreateDocumentType method to specify the DTD, followed by the CreateDocumentElement method to associate the DTD with the root entity.

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &docTypeNode;  
Local XmlNode &rootNode;  
  
&inXMLDoc = CreateXmlDoc("");  
&docTypeNode = &inXMLDoc.CreateDocumentType("Personal", "", "Personal.dtd");  
&rootNode = &inXMLDoc.CreateDocumentElement("root", "", &docTypeNode);
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>  
<!DOCTYPE Personal SYSTEM "Personal.dtd">  
</root>
```

After you've created your XmlDoc object, use the GenXmlString method to create an XML string. You can then use an Internet Script (iScript) Response object method to send the string as an XML response.

Related Topics

- [Understanding Internet Script Classes](#)
An Internet Script, also called an iScript, is a specialized PeopleCode function that generates dynamic web content. iScripts interact with web clients (browsers) using a request-response paradigm based on the behavior of the Hypertext Transfer Protocol.

Considerations Using a Unique Namespace

In the root tag, the attribute xmlns stands for the XML namespace. This allows you to define namespaces for tag names so that collisions can be avoided and validation logic can be run.

If you do not give a prefix for an XML namespace, but instead define it with the tag (xmlns) followed by a colon (:) and then a unique namespace, for example,

```
xmlns:psft
```

For example, this sort of functionality allows you to have two nodes named "Transaction", but one can be referenced by a "psft" namespace and another not, allowing for two nodes with the same name to exist, but each containing different data.

```
<?xml version="1.0"?>
<root xmlns:psft="http://www.example.com">
  <psft:Transaction>Value</psft:Transaction>
  <Transaction>Another</Transaction>
</root>
```

Incorrect results can be returned when you have a namespace as in the above example, which belongs to the namespace defined in `http://www.people.com`. When the system tries to find the path of "root/Transaction", it may return multiple nodes when in fact the end user might only want to return one.

To avoid this, do one of the following:

- Do not use `FindNode`. Use `GetElementByTagName` instead. This does not use XPath to resolve entries in the DOM. Instead, it works at a node by node basis, for example, by getting the root node, then getting the transactions node. This code may be a bit more complex to write, but you lose the richness of XPath.
- Give every `xmlns` attribute a prefix. The system will use XPath correctly and find the node.

Considerations Using Rowsets

Unstructured XML should be transformed to structured if you want to use the full rowset abilities. PeopleSoft recommends transforming the data into a rowset-based message.

If you do not want to transform the data, you need to break it up using the Transaction tag around the equivalent of each level zero rowset, as shown in the example.

```
<?xml version="1.0" ?>
- <SAMPLE_MSG>
  - <Transaction>
    - <QE_SALES_ORDER class="R">
      <QE_ACCT_ID>26</QE_ACCT_ID>
      <QE_ACCOUNT_NAME>APG-65</QE_ACCOUNT_NAME>
      <QE_ADDRESS>F18 HORNET WAY</QE_ADDRESS>
      <QE_PHONE>(206)544-1264</QE_PHONE>
      <QE_FROMROWSET />
      <QE_TOROWSET />
      <QE_SEND_SOA_BTN />
      <QE_SEND_SOS_BTN />
      <QE_TRAN_SOA_BTN />
      <QE_SEND_SQ_BTN />
      <QE_TRAN_SOS_BTN />
      <QE_TRAN_APCODE_BTN />
      <QE_TRAN_SPCODE_BTN />
      <QE_PUBXMLDOC_BTN />
      <QE_CLEAR_BTN />
    <DESCRLONG />
  </QE_SALES_ORDER>
</Transaction>
- <Transaction>
  - <QE_SALES_ORDER class="R">
```

```
<QE_ACCT_ID>27</QE_ACCT_ID>
<QE_ACCOUNT_NAME>JASON ACCOUNT</QE_ACCOUNT_NAME>
<QE_ADDRESS>THE ADDRESS</QE_ADDRESS>
<QE_PHONE>( PHONE NUMBER</QE_PHONE>
<QE_FROMROWSET />
<QE_TOROWSET />
<QE_SEND_SOA_BTN />
<QE_SEND_SOS_BTN />
<QE_TRAN_SOA_BTN />
<QE_SEND_SQ_BTN />
<QE_TRAN_SOS_BTN />
<QE_TRAN_APCODE_BTN />
<QE_TRAN_SPCODE_BTN />
<QE_PUBXMLDOC_BTN />
<QE_CLEAR_BTN />
<DESCRLONG />
</QE_SALES_ORDER>
</Transaction>
</SAMPLE_MSG>
```

XmlNode Class Considerations

In general, the XmlNode Class methods and properties can be broken up into the following categories:

Category	Description
Add	The Addxxx methods add an entity of the specified type to the end of the list of child nodes, and returns a reference to the newly created node.
Insert	The Insertxxx methods insert an entity of the specified type at the specific location and returns a reference to the newly created node.
Get	The Getxxx methods return a reference to the specified entity. The Getxxx methods may return a single reference or an array of references.
Other	The other methods enable you to find a particular entity in an XmlDocument (FindNode), copy data from one node into another, and remove nodes.

Accessing and Traversing an XmlNode Object

If you're creating an XmlDocument object, use the CreateDocumentElement, as well as the different Add and Insert methods to create XmlNode objects. These methods return a reference to the newly created node if successful.

Use the XmlNode properties for traversing the data structure (ParentNode, PreviousSibling, NextSibling, and so on.)

You can also use the ChildNodeCount property for looping through all the child nodes of a node.

Use the `NodeType` property to get the type of the node (element, processing instruction, comment, and so on).

Error Handling

Use the `IsNull` property to verify if the `XmlNode` returned by a method is a valid node. In the following example, a particular node is checked to see if it has another node after it. If it doesn't, a node is added.

```
Local XmlNode &userNode;  
Local string &userName;  
  
&userNode = &inXMLDoc.DocumentElement.FindNode("/Request/Company/Location/  
User");  
  
If Not (&MyNode.IsNull) Then  
    &userName = &userNode.NodeValue;  
Else  
    /* Do error processing */  
End-If;
```

SOAPDoc Object Considerations

A SOAP Message is an ordinary XML document that consists of the following parts:

- A mandatory SOAP envelope
- An optional SOAP header
- A mandatory SOAP body

The `SOAPDoc` class is a separate class in `PeopleCode` that works similarly to the `XmlDoc` and `XmlNode` classes. Many of the same methods and properties that work with an `XmlDoc` or `XmlNode` object also work with a `SOAPDoc` object. However, there are also methods and properties that don't apply to a `SOAPDoc` object.

The following `XmlDoc` and `XmlNode` methods do *not* apply to a `SOAPDoc` object:

- `AddCDATASection`
- `AddProcessInstruction`
- `CopyToPSFTMessage`
- `CreateDocumentType`
- `InsertCDATASection`
- `InsertProcessInstruction`
- `LoadIBContent`

Related Topics

- [Understanding the SOAPDoc Class](#)
The Simple Object Access Protocol (SOAP) is a lightweight protocol for defining synchronous messages in a distributed Web environment. It's an XML based protocol that can be used in combination with other protocols such as HTTP using URLs as endpoints for a message. SOAP is an application of XML and XML namespaces and optionally uses XML Schemas.

Scope of XmlDocument and XmlNode Objects

XmlDocument and XmlNode objects can be instantiated only from PeopleCode.

This object can be used anywhere you have PeopleCode, that is, in Application Engine PeopleCode, record field PeopleCode, and so on.

Data Type of an XmlDocument or XmlNode Object

XmlDocument objects are declared type XmlDocument.

XmlNode objects are declared type XmlNode.

For example:

```
Component XmlDocument &MyDoc;
```

```
Local XmlNode &MyNode;
```

Note

XmlNode objects can be declared only as type Local.

XmlDocument Classes Built-in Functions

PeopleCode Language Reference: CreateSOAPDoc function

PeopleCode Language Reference: CreateXmlDocument function

PeopleCode Language Reference: GetNRXmlDocument function

PeopleCode Language Reference: ReValidateNRXmlDocument function

PeopleCode Language Reference: Transform function

PeopleCode Language Reference: TransformEx function

PeopleCode Language Reference: TransformExCache function

PeopleCode Language Reference: UpdateXmlDocument function

XmlDocument Class Methods

In this section, we discuss the XmlDocument methods. The methods are discussed in alphabetical order.

CopyRowset method: XmlDoc class

Syntax

```
CopyRowset(&InRowset[, MessageName ][, MessageVersion])
```

Description

Use the CopyRowset method to copy rowset data to an XmlDoc object.

Warning

If the XmlDoc is *not* empty, the existing structure and data are replaced with the data and structure from *InRowset* . If *MessageName* is not specified, this function makes the best possible XML structure given the passed rowset. Not passing the message name should only occur when using a nonrowset-based message or when using a standalone rowset. For best performance, PeopleSoft recommends to always specify the message name.

Parameters

Parameter	Description
<i>&InRowset</i>	Specify the variable of an already instantiated and populated rowset to copy data from.
<i>MessageName</i>	Specify the name of the message that the rowset belongs to, as a string. If the message name is not specified, the best possible XML structure is created.
<i>MessageVersion</i>	Specify the message version, as a string. If you do not specify a message version, the default message version is used.

Returns

A Boolean value: True, the rowset data copied successfully, False otherwise.

Example

```
Local XmlDoc &inXMLDoc;  
Local boolean &ret;  
  
&inXMLDoc = CreateXmlDoc("");  
&ret = &inXMLDoc.CopyRowset(&rs, "<insert message name>", "<insert message=>  
version");
```

Related Topics

- [CopyToRowset method: XmlDoc class](#)

- [Understanding Rowset Class](#)

A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.

CopyToPSFTMessage method: XmlDoc class

Syntax

```
CopyToPSFTMessage(targetDoc, srcPath, targetPath)
```

Description

Use the CopyToPSFTMessage method to copy an XmlDoc to a PeopleSoft message. The *srcPath* and *targetPath* parameters enable you to map the data of the XmlDoc (using the XmlDoc structure) to the message (following the message structure.)

The XmlDoc object generally has the following structure:

```
<?xml version="1.0"?>
<MESSAGE_NAME>
  <FieldTypes>
    ...
  </FieldTypes>
  <MsgData>
    <Transaction>
      ...
    </Transaction>
  </MsgData>
</MESSAGE_NAME>
```

Parameters

Parameter	Description
<i>targetDoc</i>	Specify the XmlDoc that contains the message structure.
<i>srcPath</i>	Specify an array of string that contains the mapping path information.
<i>targetPath</i>	Specify an array of string that contains the mapping path information.

Returns

A number. The values are:

Value	Description
0	Ok
1	Missing PSCAMA structure
2	Missing FieldType structure
3	General Error

Example

```
Local XmlDoc &srcDoc, &targetDoc;  
Local array of string &srcPath, &targetPath;  
&srcPath = CreateArrayRept("", 0);  
&targetPath = CreateArrayRept("", 0);  
&srcDoc = CreateXmlDoc("");  
&targetDoc = CreateXmlDoc("");  
&ret = &srcDoc.ParseXmlFromURL("c:/temp/source.xml");  
&ret = &targetDoc.ParseXmlFromURL("c:/temp/target.xml");  
&srcPath.Push("QE_EMPLOYEE");  
&srcPath.Push("QE_EMPLOYEE/QE_ACCOUNT_TBL");  
&srcPath.Push("QE_EMPLOYEE/QE_JOBCODE");  
&srcPath.Push("QE_EMPLOYEE/DEPTID");  
&srcPath.Push("EMAIL_MSG_RCD");  
&srcPath.Push("EMAIL_MSG_RCD/EMAIL_FILE_RCD");  
&targetPath.Push("QE_EMPLOYEE_TG");  
&targetPath.Push("QE_EMPLOYEE_TG/QE_ACCOUNT_TBL_TG");  
&targetPath.Push("QE_EMPLOYEE_TG/QE_JOBCODE_TG");  
&targetPath.Push("QE_EMPLOYEE_TG/DEPTID_TG");  
&targetPath.Push("EMAIL_MSG_RCD_TG");  
&targetPath.Push("EMAIL_MSG_RCD/EMAIL_FILE_RCD_TG");  
&ret = &srcDoc.CopyToPSFTMessage(&targetDoc, &srcPath, &targetPath);
```

Related Topics

- [CopyRowset method: XmlDoc class](#)
- [CopyToRowset method: XmlDoc class](#)
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

- [Understanding Message Classes](#)
You can create the following types of messages using PeopleSoft Pure Internet Architecture::

CopyToRowset method: XmlDoc class

Syntax

```
CopyToRowset(&Rowset, Message_Name, [Message_Version])
```

Description

Use the CopyToRowset method to copy data from the XmlDoc to an already instantiated rowset.

The rowset must be based on a message object that has the same *structure* as the XmlDoc. That is, if you have a record at level two in your message and you want that data, you must have the same level zero and level one records in your message as in your XmlDoc.

For example, suppose your XmlDoc had the following structure:

```
<?xml version="1.0"?>
<QE_SALES_ORDER>
  <QE_ACCT_ID/>
  <QE_ACCOUNT_NAME/>
  <QE_ADDRESS/>
  <QE_PHONE/>
  <QE_FROMROWSET/>
  <QE_TOROWSET/>
  <QE_SEND_SOA_BTN/>
  <QE_SEND_SOS_BTN/>
  <QE_TRAN_SOA_BTN/>
  <QE_SEND_SQ_BTN/>
  <QE_TRAN_SOS_BTN/>
  <QE_TRAN_APCODE_BTN/>
  <QE_TRAN_SPCODE_BTN/>
  <QE_PUBXMLDOC_BTN/>
  <QE_CLEAR_BTN/>
  <DESCRLONG/>
</QE_SALES_ORDER>
```

If you wanted to include the information in the QE_SALES_ORDER record, you would have to have *at least* the following record structure in your message:

```
QE_SALES_ORDER
```

Any records or fields that are in the XmlDoc that aren't in the message (and vice-versa) are ignored.

Rowsets should be created using the following pseudo code:

```
Local Message &msg;
Local Rowset &rs;
Local XmlDoc &inXMLDoc;
Local boolean &ret;

&msg = CreateMessage(OPERATION.<insert message name>);
&rs = &msg.GetRowset();
&inXMLDoc = CreateXmlDoc("<insert XML structure here>");
&ret = &inXMLDoc.CopyToRowset(&rs, "<insert message name>", "<insert message⇒
version>");
```

XmlDoc objects have to follow the PeopleSoft message format:

```
<?xml version="1.0"?>
<PSmessage>
  <MsgData>
    <Transaction>
      <Record1 class="R">
        <Field1>xxx</Field1>
        <Field2>yyy</Field2>
        ...
        <Fieldn>nnn</Fieldn>
```

```
<Record2>
...
</Record2>
</Record1>
</Transaction>
</MsgData>
</PSmessage>
```

Warning

If *MessageName* is not specified, this function makes the best possible flat structure. Not passing the message name should only occur when using a nonrowset-based message or when using a standalone rowset. For best performance, PeopleSoft recommends to always specify the message name.

Parameters

Parameter	Description
<i>&InRowset</i>	Specify the variable of an already instantiated rowset to copy data to.
<i>Message_Name</i>	Specify the message name of the message. If the message name is not specified, the best possible flat structure is created.
<i>Message_Version</i>	Specify the message version, as a string. If the message version is not specified, the default message version is used.

Returns

This function always returns a True value, regardless of the success of the operation.

Related Topics

- [CopyRowset method: XmlDoc class](#)
- [Understanding Rowset Class](#)
A *rowset* object, instantiated from a Rowset class, is a collection of rows associated with buffer data. A component scroll is a rowset. You can also have a level zero rowset.
- [Understanding Message Classes](#)
You can create the following types of messages using PeopleSoft Pure Internet Architecture::

CreateDocumentElement method: XmlDoc class

Syntax

```
CreateDocumentElement(TagName [, NamespaceURI ] [, &DocType])
```

where *NamespaceURI* can have one of the following forms:

URL . URLname

OR a string URL, such as

`http://www.example.com/`

Description

Use the `CreateDocumentElement` method to create the root element of the document.

For *&DocType* you must specify an already instantiated document type node using `CreateDocumentType`.

Parameters

Parameter	Description
<i>TagName</i>	Specify the name of the tag to be used for the document element.
<i>NamespaceURI</i>	Specify the URI that contains the Namespaces for the XmlDoc, as a string.
<i>&DocType</i>	Specify the document type node. This must already be instantiated using <code>CreateDocumentType</code> .

Returns

A reference to an `XmlNode` object representing the root element.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &docTypeNode;  
Local XmlNode &rootNode;  
  
&inXMLDoc = CreateXmlDoc("");  
&docTypeNode = &inXMLDoc.CreateDocumentType("Personal", "", "Personal.dtd");  
&rootNode = &inXMLDoc.CreateDocumentElement("root", "", &docTypeNode);
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>  
<!DOCTYPE Personal SYSTEM "Personal.dtd">  
<root/>
```

Related Topics

- [CreateDocumentType method: XmlDoc class](#)

CreateDocumentType method: XmlDoc class

Syntax

```
CreateDocumentType(Name, PublicID, SystemID)
```

Description

Use the `CreateDocumentType` method to create the document type declaration (a document type node) in the `XmlDoc`.

You can specify only *one* document type node for an `XmlDoc`.

You need to create a document type node only if you have a document type definition (DTD). You don't need to specify a document type declaration in your XML. Generally, the DTD file is used for validating the XML.

If you do specify this type of node when creating an `XmlDoc` in `PeopleCode`, you *must* specify it immediately following the creation statement. Then, you must specify the document type when you create the root node. This means your code should start with the `CreateXmlDoc` function, creating the `XmlDoc` object, then use the `CreateDocumentType` method, followed by the `CreateDocumentElement` method, creating the root node.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the document type declaration as a string.
<i>PublicID</i>	Specify the public ID of the document type declaration as a string.
<i>SystemID</i>	Specify the system ID of the document type declaration as a string.

Returns

A reference to an `XmlNode` object representing the document type element.

Example

The following example creates a document type declaration using the DTD named "Personal".

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &docTypeNode;  
Local XmlNode &rootNode;  
  
&inXMLDoc = CreateXmlDoc("");  
&docTypeNode = &inXMLDoc.CreateDocumentType("Personal", "", "Personal.dtd");  
&rootNode = &inXMLDoc.CreateDocumentElement("root", "", &docTypeNode);
```

This produces the following XML:

```
<?xml version="1.0"?>  
<!DOCTYPE Personal SYSTEM "Personal.dtd">  
<root/>
```

Considerations Using Public and System IDs

You can specify both a public and a system ID. However, if you want to use a system ID *only*, you must specify a Null string ("") for the public ID. To use a public ID *only*, you must specify a Null string ("") for the system ID. If the system ID and public ID are both Null (""), then the document type is considered as system.

To use the Personal.dtd as a system ID, you must use the following code:

```
&DocType = &MyDoc.CreateDocumentType("Personal", "", "Personal.dtd");
```

This produces the XML:

```
<!DOCTYPE Personal SYSTEM "Personal.dtd">
```

To use the Personal.dtd as a public ID, you must use the following code:

```
&DocType = &MyDoc.CreateDocumentType("Personal", "Personal.dtd", "");
```

This produces the XML:

```
<!DOCTYPE Personal PUBLIC "Personal.dtd">
```

Related Topics

- [CreateDocumentElement method: XmlDoc class](#)
- PeopleCode Language Reference: CreateXmlDoc function

GenFormattedXmlString method: XmlDoc class

Syntax

```
GenFormattedXmlString()
```

Description

Use the GenFormattedXmlString method to return an XML string representing the XmlDoc object.

The GenFormattedXmlString method produces an XML string with new line characters and indents. If you want an unformatted XML string, that is, with all the data on a single line, use the GenXmlString method instead.

Parameters

None.

Returns

A formatted XML string.

Example

```
Local XmlDoc &inXMLDoc;  
Local string &outStr;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><PSMessage/>");  
&outStr = &inXMLDoc.GenFormattedXmlString();
```

Related Topics

- [GenXmlString method: XmlDocument class](#)

GenXmlFile method: XmlDocument class

Syntax

GenXmlFile(*path*)

Description

Use the GenXmlFile method to write the content of the XmlDocument object to a file. The XML output file will be in UTF-8 format, and its elements will be formatted and named exactly the same as the XML output from the GenXmlString method.

Parameters

Parameter	Description
<i>path</i>	Specifies the absolute system path of the destination file.

Returns

A Boolean value: True, if the XML file was saved successfully, False otherwise.

Example

```
Local XmlDocument &xmldocRoot = CreateXmlDoc(" ");
Local XmlNode &nodeRoot = &xmldocRoot.CreateDocumentElement("root");
.
.
.
&result = &xmldocRoot.GenXmlFile("c:\data.xml");
```

Related Topics

- [GenFormattedXmlString method: XmlDocument class](#)

GenXmlString method: XmlDocument class

Syntax

GenXmlString()

Description

Use the GenXmlString method to return an XML string representing the XmlDocument object.

The GenXmlString method produces an XML string with all the data on a single line. If you want a formatted XML string, that is, with new line characters and indents, use the GenFormattedXmlString method instead.

Parameters

None.

Returns

An XML string.

Example

```
Local XmlDoc &inXMLDoc;  
Local string &outStr;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><PSMessage/>");  
&outStr = &inXMLDoc.GenXmlString();
```

Related Topics

- [GenFormattedXmlString method: XmlDoc class](#)

GetElementsByTagName method: XmlDoc class

Syntax

```
GetElementsByTagName(TagName)
```

Description

Use the GetElementsByTagName method to return an array of XmlNode objects that match the specified tag name.

If you specify an invalid tag name, an array is still returned, however, it has 0 elements in it.

Parameters

Parameter	Description
<i>TagName</i>	Specify the tag name that you want to look for.

Returns

An array of XmlNode objects.

Example

Using the following Xml structure:

```
<?xml version="1.0"?>  
<PSmessage>  
  <MsgData>  
    <Transaction>  
      <Record1 class="R">  
        <Field1>one</Field1>  
        <Field1>two</Field1>  
        <Field1>three</Field1>
```

```
        </Record1>
    </Transaction>
</MsgData>
</PSmessage>
```

The following code finds all of the *Field1* elements:

```
Local array of XmlNode &field1List;

&field1List = &inXMLDoc.GetElementsByTagName("Field1");

If &field1List.Len = 0 Then
    /* do error processing */
Else
    /* do processing */
End-If;
```

Related Topics

- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

LoadIBContent method: XmlDoc class

Syntax

```
LoadIBContent(Content[, RootTagName])
```

Description

Use LoadIBContent to load data into an XmlDoc object. This function is primarily used for display purposes, the main use is found in the Integration Broker Monitor for viewing message structures.

When *Content* is an XML string, the XmlDoc contains the DOM representation of the XML.

When *Content* is not an XML string, LoadIBContents generates a DOM wrapper.

Parameters

Parameter	Description
<i>Content</i>	Specify the content of the XmlDoc.
<i>RootTagName</i>	Specify the root tag name to be used in the XmlDoc object used as the wrapper, if the data is non-Xml. If a root tag name is not specified, and the data is non-Xml, the contents are not wrapped with the default of root tag name of PSMessage.

Returns

This method returns a Boolean value that is always True.

Example

Using the following data:

```
John Q. Public,1234 West Eastland,925-987-0909
Jane Doe,423 Someplace,234-992-9383
```

The following PeopleCode program specifies a root name:

```
Local XmlDoc &inXMLDoc;
Local boolean &ret;
Local string &inStr;

&inStr = "John Q. Public,1234 West Eastland,925-987-0909" | Char(13) | "Jane⇒
Doe,423 Someplace,234-992-9383";

&inXMLDoc = CreateXmlDoc("");
&ret = &inXMLDoc.LoadIBContent(&inStr, "Root");
```

This produces the following:

```
<?xml version="1.0"?>
<Root>
  <data PsNonXml="Yes">
    <![CDATA[John Q. Public,1234 West Eastland,925-987-0909
Jane Doe,423 Someplace,234-992-9383]]>
  </data>
</Root>
```

The following PeopleCode program does not specify a root name:

```
Local XmlDoc &inXMLDoc;
Local boolean &ret;
Local string &inStr;

&inStr = "John Q. Public,1234 West Eastland,925-987-0909" | Char(13) | "Jane⇒
Doe,423 Someplace,234-992-9383";

&inXMLDoc = CreateXmlDoc("");
&ret = &inXMLDoc.LoadIBContent(&inStr);
```

This produces the following:

```
<?xml version="1.0"?>
<PSMessage>
  <data PsNonXml="Yes">
    <![CDATA[John Q. Public,1234 West Eastland,925-987-0909
Jane Doe,423 Someplace,234-992-9383]]>
  </data>
</PSMessage>
```

```
</data>  
</PSMessage>
```

The following is an example of a valid XML document:

```
Local XmlDoc &inXMLDoc;  
Local boolean &ret;  
Local string &inStr;  
  
&inStr = "<?xml version='1.0'?><root/>";  
  
&inXMLDoc = CreateXmlDoc("");  
&ret = &inXMLDoc.LoadIBContent(&inStr);
```

This produces the following:

```
<?xml version="1.0"?>  
<root/>
```

ParseXmlFromURL method: XmlDoc class

Syntax

```
ParseXmlFromURL(path [, DTDValidation])
```

Where *path* can have *one* of the following forms—a string URL, containing the filename and extension:

```
http://www.example.com/filename.ext
```

Or an absolute file path, including the filename and extension:

```
c:\directory\filename.ext
```

Note

HTTPS is not a supported protocol for *path*.

Description

Use the ParseXmlFromURL method to convert the XML file located at *path* into an XmlDoc object that you can then manipulate using PeopleCode. The XmlDoc object executing the method is populated with the XML string after it's been converted. Any data already existing in the XmlDoc object is overwritten.

Using this method also does basic validation of the XML string, comparing it to the document type declaration (DTD) if the DOCTYPE for the DTD is provided in the XML string.

Note

PeopleSoft only supports UTF-8 encoding. Therefore, if the input file is encoded, it must be encoded in UTF-8.

Parameters

Parameter	Description
<i>path</i>	Specify the URL or file path to the XML that file you want to manipulate. If you specify a string URL, the URL must be contained in quotation marks. Note: HTTPS is not a supported protocol for <i>path</i> .
<i>DTDValidation</i>	Specify whether to validate a document type definition (DTD.) This parameter takes a Boolean value. If you specify true, the DTD validation occurs if a DTD is provided. If you specify false, and if a DTD is provided, it is ignored and the XML isn't validated against the DTD. The default value for this parameter is false. In the case of application messaging, if a DTD is provided, it's always ignored and the XML isn't validated against the DTD. If the XML cannot be validated against a DTD, an error is thrown saying that there was an XML parse error.

Returns

A Boolean value: True, the XML file converted successfully and was validated, False otherwise. (If the XML file is not valid, the PeopleCode program terminates.)

Example

The following PeopleCode program loads a file from a file path:

```
Local XmlDoc &inXMLDoc;  
Local boolean &ret;  
  
&inXMLDoc = CreateXmlDoc("");  
&ret = &inXMLDoc.ParseXmlFromURL("c:\temp\in.xml");
```

The following PeopleCode program loads a file from a URL:

```
Local XmlDoc &inXMLDoc;  
Local boolean &ret;  
  
&inXMLDoc = CreateXmlDoc("");  
&ret = &inXMLDoc.ParseXmlFromURL("http://www.example.com/xmlfile.xml");
```

Related Topics

- [ParseXmlString method: XmlDoc class](#)

ParseXmlString method: XmlDoc class

Syntax

ParseXmlString(*XmlString*)

Description

Use the ParseXmlString method to convert the XML string into an XmlDoc object that you can then manipulate using PeopleCode. The XmlDoc object executing the method is populated with the XML string after it's been converted. Any data already existing in the XmlDoc object is overwritten.

Using this method also does basic validation of the XML string, comparing it to the document type declaration (DTD) if the DOCTYPE for the DTD is provided in the XML string.

Parameters

Parameter	Description
<i>XmlString</i>	Specify an XML string that you want to be able to manipulate using PeopleCode.

Returns

A Boolean value: True, the XML string converted successfully and was validated, False otherwise. (If the XML is not valid, the PeopleCode program terminates.)

Example

```
Local XmlDoc &inXMLDoc;  
Local boolean &ret;  
Local string &str;  
  
&str = "<?xml version='1.0'?><root/>";  
  
&inXMLDoc = CreateXmlDoc("");  
&ret = &inXMLDoc.ParseXmlString(&str);  
  
If &ret Then  
    /* do processing */  
Else  
    /* do error processing */  
End-If;
```

Related Topics

- [ParseXmlFromURL method: XmlDoc class](#)

XmlDoc Properties

In this section, we discuss the XmlDoc properties. The properties are discussed in alphabetical order.

DocumentElement property: XmlDoc class

Description

This property returns a reference to the root element of the document as an XmlNode.

This property is read-only.

Related Topics

- [XmlNode Class](#)
Unlike C++ and Java programming model, PeopleCode interface uses the root object XmlNode to represent all 11 different derived objects. An XmlNode object can be defined only as local.

IsNull property: XmlDoc class

Description

This property returns a Boolean value, indicating whether the doc is a valid object. This property returns True if the XmlDoc object is valid, False otherwise.

This property is read-only.

XmlNode Class

Unlike C++ and Java programming model, PeopleCode interface uses the root object XmlNode to represent all 11 different derived objects. An XmlNode object can be defined only as local.

XmlNode Class Methods

Add methods create a new node of the specific type, append this new node to the child list, and return this newly created node, while Insert methods add the node to the specified position.

In this section, we discuss the XmlNode methods. The methods are discussed in alphabetical order.

AddAttribute method: XmlNode class

Syntax

```
AddAttribute(Name, Value);
```

Description

Use the AddAttribute method to add an attribute to an XmlNode. A reference to the newly created attribute is returned.

If you specify an attribute name that already exists, the new value you use *replaces* the existing value, and a reference to the attribute is returned.

Attributes added by the AddAttribute method appear in an arbitrary order in the generated XML.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the Attribute that you want to create, as a string.
<i>Value</i>	Specify the value of the Attribute that you want to create, as a string.

Returns

None.

Example

Here is a set of XML response code.

```
<?xml version="1.0"?>
<myroot>
  <postreqresponse>
    <candidate>
      <user>
        <location scenery="great" density="low" blank="eh?"/>
      </user>
    </candidate>
  </postreqresponse>
</myroot>
```

Here's the PeopleCode that builds it.

```
Local XmlDoc &inXMLDoc;
Local XmlNode &postReqNode;
Local XmlNode &candidatesNode;
Local XmlNode &userNode;
Local XmlNode &locationNode;
Local XmlNode &sceneryAtt;
Local XmlNode &densityAtt;
Local XmlNode &blankAtt;
Local boolean &ret;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");

&postReqNode = &inXMLDoc.DocumentElement.AddElement("postreqresponse");
&candidatesNode = &postReqNode.AddElement("candidates");
&userNode = &candidatesNode.AddElement("user");
&locationNode = &userNode.AddElement("location");

&locationNode.AddAttribute("scenery", "great");
```

```
&locationNode.AddAttribute("density", "low");  
&locationNode.AddAttribute("blank", "eh?");
```

Related Topics

- [IsNull property: XmlNode class](#)

AddAttributeNS method: XmlNode class

Syntax

```
AddAttributeNS(NamespaceURI, AttributeName, Value)
```

where *NamespaceURI* can have *one* of the following forms:

URL.URLName

OR a string URL, such as

`http://www.example.com/`

Description

Use the AddAttributeNS method to add a namespace attribute to an XmlNode. The new attribute is appended to the list of child nodes.

A reference to the newly created attribute is returned.

If you specify an attribute name that already exists, the new value you use *replaces* the existing value, and a reference to the attribute is returned.

Parameters

Parameter	Description
<i>NamespaceURI</i>	Specify the URI that contains the Namespaces for the XmlDocument, as a string.
<i>AttributeName</i>	Specify the name of the Attribute that you want to create, as a string.
<i>Value</i>	Specify the value of the Attribute that you want to create, as a string.

Returns

None.

Example

```
Local XmlDocument &inXMLDoc;  
Local XmlNode &childNodes;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");
```

```
&childNode = &inXMLDoc.DocumentElement.AddElement("child");  
&childNode.AddAttributeNS("http://www.example.com", "scenery", "great");
```

Related Topics

- [IsNull property: XmlNode class](#)

AddCDATASection method: XmlNode class

Syntax

```
AddCDATASection(Data)
```

Description

Use the AddCDATASection to add a CDATA section to an XmlNode.

CDATA sections may occur anywhere character data may occur; they are used to escape blocks of text containing characters which would otherwise be recognized as markup.

To insert a CDATA section at a particular place in the list of nodes, use the InsertCDATASection method instead.

A reference to the newly created CDATA section is returned.

Note

You cannot use this method with a SoapDoc object.

Parameters

Parameter	Description
<i>Data</i>	Specify the data to be included in the CDATA section as a string.

Returns

A reference to the newly created CDATA section.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &childNode;  
Local XmlNode &cdataNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");  
&childNode = &inXMLDoc.DocumentElement.AddElement("child");  
&cdataNode = &childNode.AddCDATASection("testing...");
```

The preceding PeopleCode program produces the following:

```
<?xml version="1.0"?>
<myroot>
  <child>
    <![CDATA[testing...]]>
  </child>
</myroot>
```

Related Topics

- [InsertCDATASection method: XmlNode class](#)

AddComment method: XmlNode class

Syntax

AddComment(*Text*)

Description

Use the AddComment method to add a comment to an XmlNode. The new attribute is appended to the list of child nodes.

To insert a comment at a particular place in the list of nodes, use the InsertComment method instead.

A reference to the newly created comment is returned.

Parameters

Parameter	Description
<i>Text</i>	Specify the text to be used as the comment, as a string.

Returns

A reference to the newly created comment.

Example

For example:

```
Local XmlDoc &inXMLDoc;
Local XmlNode &childNode;
Local XmlNode &commentNode;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");
&childNode = &inXMLDoc.DocumentElement.AddElement("child");
&commentNode = &childNode.AddComment("This is an example of a comment.");
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>
<myroot>
  <child>
    <!--This is an example of a comment.-->
  </child>
</myroot>
```

Related Topics

- [InsertComment method: XmlNode class](#)

AddElement method: XmlNode class

Syntax

AddElement(*TagName*)

Description

Use the AddElement method to add an element to the XmlNode. The new element is appended to the list of child nodes.

To insert an element at a particular place in the list of nodes, use the InsertElement method instead.

A reference to the newly created element is returned.

Parameters

Parameter	Description
<i>TagName</i>	Specify the tag for the new element that you are adding, as a string.

Returns

A reference to the newly created element.

Example

For example:

```
Local XmlDoc &inXMLDoc;
Local XmlNode &childNode;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");
&childNode = &inXMLDoc.DocumentElement.AddElement("child");
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>
<myroot>
```

```
<child/>
</myroot>
```

Related Topics

- [InsertElement method: XmlNode class](#)
- [GetElement method: XmlNode class](#)
- [GetElementsByTagName method: XmlNode class](#)

AddElementNS method: XmlNode class

Syntax

```
AddElementNS(NamespaceURI, TagName)
```

Where *NamespaceURI* can have *one* of the following forms:

URL.URLName

Or a string URL, such as:

```
http://www.example.com/
```

Description

Use AddElementNS to add a namespace element to an XmlNode. The new element is appended to the list of child nodes.

To insert a Namespace element at a particular place in the list of nodes, use the InsertElementNS method instead. A reference to the newly created element is returned. If you specify an element name that already exists, the new value you use replaces the existing value, and a reference to the element is returned.

Parameters

Parameter	Description
<i>NamespaceURI</i>	Specify the URI that contains the Namespaces for the XmlDocument, as a string.
<i>TagName</i>	Specify the name of the Element that you want to create, as a string.

Returns

A reference to the newly created element if successful. If not successful, the IsNull property is set to True.

Example

```
Local XmlDocument &inXMLDoc;
Local XmlNode &childNode;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");
```

```
&childNode = &inXMLDoc.DocumentElement.AddElementNS("http://www.example.com", ⇒  
"child");
```

AddEntityReference method: XmlNode class

Syntax

```
AddEntityReference(Name)
```

Description

Use the AddEntityReference method to add an entity reference. An entity reference refers to the content of the named entity. The new entity reference is appended to the list of child nodes. In the generated XML, the entity reference is automatically prefaced with the '&' character and suffixed with a semi-colon.

The named entity must exist in the document type declaration (DTD).

To insert an entity reference at a particular place in the list of nodes, use the InsertEntityReference method instead.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the entity to which this reference refers to.

Returns

A reference to the newly created entity reference.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &childNode;  
Local XmlNode &entityRef;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");  
&childNode = &inXMLDoc.DocumentElement.AddElement("child");  
&entityRef = &childNode.AddEntityReference("MyURL");
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>  
<myroot>  
  <child>  
&MyURL; </child>  
</myroot>
```

Related Topics

- [InsertEntityReference method: XmlNode class](#)

AddNode method: XmlNode class

Syntax

```
AddNode(&XmlNode)
```

Description

Use the AddNode method to add an XmlNode to the XmlDocument. The new node is appended to the list of child nodes.

To insert a node at a particular place in the list of nodes, use the InsertNode method instead.

A reference to the newly created node is returned.

Parameters

Parameter	Description
<i>&XmlNode</i>	Specify an already instantiated XmlNode that you want to add.

Returns

None.

Example

```
Local XmlDocument &inXMLDoc, &firstDoc;  
Local XmlNode &childNode;  
  
&firstDoc = CreateXmlDoc("<?xml version='1.0'?><myroot><child><subchild/></child><=>  
/myroot>");  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&childNode = &firstDoc.DocumentElement.FindNode("/child");  
&inXMLDoc.DocumentElement.AddNode(&childNode);
```

Related Topics

- [InsertNode method: XmlNode class](#)

AddProcessInstruction method: XmlNode class

Syntax

```
AddProcessInstruction(Target, Data)
```

Description

Use the AddProcessInstruction method to add a processing instruction to an XmlNode. The new process instruction is appended to the end of the child list.

To insert a processing instruction at a particular place, use the `InsertProcessInstruction` method instead.

A reference to the newly created processing instruction is returned.

Note

You cannot use this method with a `SoapDoc` object.

Parameters

Parameter	Description
<i>Target</i>	Specify the application to which the instruction is directed, as a string.
<i>Data</i>	Specify the data used with the processing instruction.

Returns

A reference to the newly created processing instruction.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &procInst;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");  
&procInst = &inXMLDoc.DocumentElement.AddProcessInstruction("xml-stylesheet", ⇒  
    "href=""book.css"" type=""text/css""");
```

The preceding PeopleCode program produces the following XML :

```
<?xml version="1.0"?>  
<myroot>  
  <?xml-stylesheet href="book.css" type="text/css"?>  
</myroot>
```

Related Topics

- [InsertProcessInstruction method: XmlNode class](#)

AddText method: XmlNode class

Syntax

`AddText(Data)`

Description

Use the `AddText` method to add a text node to an `XmlNode`.

Note

A text node is *not* the same as a text declaration. The text declaration is added automatically with the CreateXmlDoc function. A text node just contains text within an XmlDocument.

To insert a text node at a particular place, use the InsertText method instead.

A reference to the newly created text node is returned.

Parameters

Parameter	Description
<i>Data</i>	Specify the data to be used as the text node, as a string.

Returns

A reference to the newly created text node.

Example

For example:

```
Local XmlDocument &inXMLDoc;  
Local XmlNode &childNodes;  
Local XmlNode &textNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><myroot/>");  
&childNodes = &inXMLDoc.DocumentElement.AddElement("child");  
&textNode = &childNodes.AddText("This is text");
```

The preceding PeopleCode program produces the following XML:

```
<?xml version="1.0"?>  
<myroot>  
  <child>This is text</child>  
</myroot>
```

Related Topics

- [InsertText method: XmlNode class](#)

CopyNode method: XmlNode class

Syntax

```
CopyNode(&Node)
```

Description

Use the CopyNode method to copy a node specified by *&Node* and *all* of its child nodes into the current node, as a child node. The new node is appended to the end of the list of child nodes. The specified node can belong to a different XmlDocument.

If you just want to copy a top-level node, without copying its children, you can just create a new node with the name of the node you want.

Parameters

Parameter	Description
<i>&Node</i>	Specify an already instantiated node that you want to copy.

Returns

None.

Example

Suppose that your XmlDocument has the following structure:

```
<?xml version="1.0"?>
<myroot>
  <child>
    <subchild/>
  </child>
</myroot>
```

The following PeopleCode copies the node *child* and copies it into another doc.

```
Local XmlDocument &inXMLDoc, &firstDoc;
Local XmlNode &childNode;

&firstDoc = CreateXmlDoc("<?xml version='1.0'?><myroot><child><subchild/></child><=>
/ myroot>");
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");
&childNode = &firstDoc.DocumentElement.FindNode("/child");
&inXMLDoc.DocumentElement.CopyNode(&childNode);
```

The following is the new structure:

```
<?xml version="1.0"?>
<root>
  <child>
    <subchild/>
  </child>
</root>
```

Related Topics

- [AddNode method: XmlNode class](#)

- [InsertNode method: XmlNode class](#)
- [GetChildNode method: XmlNode class](#)
- [FindNode method: XmlNode class](#)
- [FindNodes method: XmlNode class](#)

FindNode method: XmlNode class

Syntax

`FindNode(Path)`

Description

Use the FindNode method to return a reference to an XmlNode.

The path is specified as the list of tag names, to the node that you want to find, each separated by a slash (/).

Parameters

Parameter	Description
<i>Path</i>	Specify the tag names up to and including the name of the node that you want returned, starting with a slash and each separated by a slash (/). This is known as the XPath query language. See XML Path Language (XPath) Version 1.0 .

Returns

An XmlNode matching the path if successful. If not successful, the IsNull property on the XmlNode is set to True.

Example

Suppose your XmlDocument has the following structure:

```
<?xml version="1.0"?>
<myroot>
  <postreqresponse>
    <candidate>
      <user>
        <location scenery="great" density="low" blank="eh?" />
      </user>
    </candidate>
  </postreqresponse>
</myroot>
```

You want to return a reference to the location attribute. Use the following *Path* to do it:

```
&XmlNode = &MyDoc.FindNode("/myroot/postreqresponse/candidate/user/location");
```

Related Topics

- [GetChildNode method: XmlNode class](#)
- [FindNodes method: XmlNode class](#)

FindNodes method: XmlNode class

Syntax

`FindNodes(Path)`

Description

Use the FindNodes method to return a reference to an array containing all the XmlNode objects that match the path.

The path is specified as the list of tag names, to the node that you want to find, each separated by a slash (/) when a namespace is not specified.

Parameters

Parameter	Description
<i>Path</i>	Specify the tag names up to and including the name of the node that you want returned, each separated by a slash (/). This is known as the XPath query language. See XML Path Language (XPath) Version 1.0 .

Returns

An array of XmlNode objects. If there is no match for the specified path, an array with 0 elements is returned.

Example

Using the following input:

```
<?xml version="1.0"?>
<PSmessage>
  <MsgData>
    <Transaction>
      <Record1 class="R">
        <Field1>one</Field1>
        <Field1>two</Field1>
        <Field1>three</Field1>
      </Record1>
    </Transaction>
  </MsgData>
</PSmessage>
```

The following PeopleCode program finds all of the *Field1* nodes:

```
Local array of XmlNode &field1List;
```

```
&field1List = &inXMLDoc.DocumentElement.FindNodes("MsgData/Transaction/Record1⇒  
/Field1");  
  
If &field1List.Len = 0 Then  
    /* do error processing, no nodes returned */  
Else  
    /* do regular processing */  
End-If;
```

Related Topics

- [GetChildNode method: XmlNode class](#)
- [FindNode method: XmlNode class](#)
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GenXmlString method: XmlNode class

Syntax

```
GenXmlString()
```

Description

Use the GenXmlString method to generate an XML string of the XmlNode.

Parameters

None.

Returns

An XML String.

Example

```
&MyXML = &MyNode.GenXmlString();
```

GetAttributeName method: XmlNode class

Syntax

```
GetAttributeName(Index)
```

Description

Use the GetAttributeName method to return the specified attribute.

Parameters

Parameter	Description
<i>Index</i>	Specify an integer representing the attribute you want to access.

Returns

A string.

Example

```
Local XmlDoc &inXMLDoc;  
Local string &attName;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&inXMLDoc.DocumentElement.AddAttribute("name", "Joe");  
&inXMLDoc.DocumentElement.AddAttribute("address", "1234 West Eastland");  
  
&attName = &inXMLDoc.DocumentElement.GetAttributeName(2);
```

GetAttributeValue method: XmlNode class

Syntax

```
GetAttributeValue({Name | Index})
```

Description

Use the GetAttributeValue method to return the specific attribute value, given an attribute name. The attribute name is case-sensitive, so you must specify the exact name.

Parameters

Parameter	Description
<i>Name Index</i>	Specify the name or index of the attribute whose value you want to access.

Returns

A string containing the value of the specified attribute.

Example

```
Local XmlDoc &inXMLDoc;  
Local string &attName;  
Local string &attValue;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&inXMLDoc.DocumentElement.AddAttribute("name", "Joe");  
&inXMLDoc.DocumentElement.AddAttribute("address", "1234 West Eastland");
```



```
&attName = &inXMLDoc.DocumentElement.GetAttributeName(2);  
&attValue = &inXMLDoc.DocumentElement.GetAttributeValue(&attName);
```

GetCDATAValue method: XmlNode class

Syntax

```
GetCDATAValue()
```

Description

Use the GetCDATAValue method to return the *value* of the first CDATA section in an XmlNode.

Parameters

None.

Returns

A reference to the value of the first CDATA section as a string.

Example

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &cdatNode;  
Local string &theData;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&cdatNode = &dataNode.AddCDATASection("this is a bunch of text");  
  
&theData = &dataNode.GetCDATAValue();
```

Related Topics

- [AddCDATASection method: XmlNode class](#)
- [InsertCDATASection method: XmlNode class](#)
- [GetCDATAValues method: XmlNode class](#)

GetCDATAValues method: XmlNode class

Syntax

```
GetCDATAValues()
```

Description

Use the GetCDATAValues method to return an array of string containing the *values* of the CDATA section in an XmlNode.

Parameters

None.

Returns

An array of string.

Example

```
Local XmlDocument &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &cdataNode;  
Local array of string &theData;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&cdataNode = &dataNode.AddCDataSection("this is a bunch of text");  
&cdataNode = &dataNode.AddCDataSection("more text");  
&cdataNode = &dataNode.AddCDataSection("still more text");  
  
&theData = &dataNode.GetCDataValues();
```

Related Topics

- [AddCDataSection method: XmlNode class](#)
- [InsertCDataSection method: XmlNode class](#)
- [GetCDataValue method: XmlNode class](#)
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetChildNode method: XmlNode class

Syntax

```
GetChildNode(index)
```

Description

Use the GetChildNode method to return the specified child node of an XmlNode.

Parameters

Parameter	Description
<i>Index</i>	Specify an integer representing the child node that you want to access.

Returns

A reference to an XmlNode. If the specified XmlNode isn't found, the IsNull property for the XmlNode is set to True.

Example

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data2");  
  
&dataNode = &inXMLDoc.DocumentElement.GetChildNode(2);
```

Related Topics

- [FindNode method: XmlNode class](#)
- [FindNodes method: XmlNode class](#)

GetElement method: XmlNode class

Syntax

```
GetElement()
```

Description

Use the GetElement method to return the first child element node in the list of child nodes.

Parameters

None.

Returns

A reference to an element.

Example

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data2");  
  
&dataNode = &inXMLDoc.DocumentElement.GetElement();
```

Related Topics

- [AddElement method: XmlNode class](#)
- [InsertElement method: XmlNode class](#)

- [GetElements method: XmlNode class](#)
- [GetElementsByTagName method: XmlNode class](#)

GetElements method: XmlNode class

Syntax

GetElements()

Description

Use the GetElements method to return an array of all the XmlNode objects that are elements.

Parameters

None.

Returns

An array of XmlNode of all the element nodes. If there are no element nodes, an array with 0 elements is returned.

Example

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local array of XmlNode &dataList;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data2");  
  
&dataList = &inXMLDoc.DocumentElement.GetElements();  
  
If &dataList.Len = 0 Then  
    /* do error processing, no nodes returned */  
Else  
    /* do regular processing */  
End-If;
```

Related Topics

- [AddElement method: XmlNode class](#)
- [InsertElement method: XmlNode class](#)
- [GetElement method: XmlNode class](#)
- [GetElementsByTagName method: XmlNode class](#)
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetElementsByTagName method: XmlNode class

Syntax

`GetElementsByTagName(TagName)`

Description

Use the `GetElementsByTagName` method to return an array of `XmlNode` objects that match the specified tag name.

Parameters

Parameter	Description
<i>TagName</i>	Specify the tag name that you want to look for.

Returns

An array of `XmlNode`. If you specify an invalid tag name, the returned array has 0 elements.

Example

Using the following input:

```
<?xml version="1.0"?>
<PSmessage>
  <MsgData>
    <Transaction>
      <Record1 class="R">
        <Field1>one</Field1>
        <Field1>two</Field1>
        <Field1>three</Field1>
      </Record1>
    </Transaction>
  </MsgData>
</PSmessage>
```

The following PeopleCode program finds all *Field1* nodes:

```
Local array of XmlNode &field1List;

&field1List = &inXMLDoc.DocumentElement.GetElementsByTagName("Field1");

If &field1List.Len = 0 Then
    /* do error processing, no nodes returned */
Else
    /* do regular processing */
End-If;
```

Related Topics

- [AddElement method: XmlNode class](#)

- [InsertElement method: XmlNode class](#)
- [GetElements method: XmlNode class](#)
- [GetElement method: XmlNode class](#)
- [Understanding Arrays](#)

An array is a collection of data storage locations, each of which holds the same type of data. Each storage location is called an element of the array. When you create an array, you don't have to declare the size of the array at declaration time. Arrays grow and shrink dynamically as you add (or remove) data. The size of an array is limited by the available memory. You can't access past the end of an array, but you can assign outside the existing boundaries, thereby growing the array.

GetElementsByTagNameNS method: XmlNode class

Syntax

`GetElementsByTagNameNS(NamespaceURI, TagName)`

Where *NamespaceURI* can have *one* of the following forms:

`URL.URLName`

Or a string URL, such as:

`http://www.example.com/`

Description

Use the `GetElementsByTagNameNS` method to return an array of `XmlNode` objects that match the specified namespace and qualified name.

Parameters

Parameter	Description
<i>NamespaceURI</i>	Specify the URI that contains the Namespace for the <code>XmlDoc</code> , as a string.
<i>TagName</i>	Specify the name of the element that you want to retrieve.

Returns

An array of `XmlNode`. If you specify an invalid `NamespaceURI`, the returned array has 0 elements.

Example

Using the following input:

```
<?xml version="1.0"?>
<Psmesssage xmlns="http://www.example.com">
  <MsgData>
    <Transaction>
```

```
<Record1 class="R">
  <Field1>one</Field1>
  <Field1>two</Field1>
  <Field1>three</Field1>
</Record1>
</Transaction>
</MsgData>
</PSmessage>
```

The following PeopleCode program finds all *Field1* nodes:

```
Local array of XmlNode &field1List;

&field1List = &inXMLDoc.DocumentElement.GetElementsByTagNameNS("http:⇒
//www.example.com", "Field1");

If &field1List.Len = 0 Then
  /* do error processing, no nodes returned */
Else
  /* do regular processing */
End-If;
```

InsertCDATASection method: XmlNode class

Syntax

`InsertCDATASection(Data, Position)`

Description

Use the `InsertCDATASection` method to insert a CDATA section in an `XmlNode`, at the location specified by *Position*.

Note

You cannot use this method with a `SoapDoc` object.

Parameters

Parameter	Description
<i>Data</i>	Specify the data for the CDATA section as a string.
<i>Position</i>	Specify where you want to insert the CDATA Section, as a number.

Returns

A reference to the newly created CDATA section.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &cdataNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&cdataNode = &dataNode.AddCDataSection("this is a bunch of text");  
&cdataNode = &dataNode.AddCDataSection("still more text");  
  
&cdataNode = &dataNode.InsertCDataSection("more text", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    <![CDATA[this is a bunch of text]]>  
    <![CDATA[still more text]]>  
  </data>  
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    <![CDATA[this is a bunch of text]]>  
    <![CDATA[more text]]>  
    <![CDATA[still more text]]>  
  </data>  
</root>
```

Related Topics

- [AddCDataSection method: XmlNode class](#)
- [GetCDataValue method: XmlNode class](#)
- [GetCDataValues method: XmlNode class](#)

InsertComment method: XmlNode class

Syntax

```
InsertComment(Data, Position)
```

Description

Use the InsertComment method to insert a comment in an XmlNode at the location specified by *Position*.

Parameters

Parameter	Description
<i>Data</i>	Specify the data for the comment as a string.
<i>Position</i>	Specify where you want to insert the comment, as a number.

Returns

A reference to the newly created comment.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &commentNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&commentNode = &dataNode.AddComment("this is a comment");  
&commentNode = &dataNode.AddComment("still another comment");  
  
&commentNode = &dataNode.InsertComment("more comments", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    <!--this is a comment-->  
    <!--still another comment-->  
  </data>  
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    <!--this is a comment-->  
    <!--more comments-->  
    <!--still another comment-->  
  </data>  
</root>
```

Related Topics

- [AddComment method: XmlNode class](#)

InsertElement method: XmlNode class

Syntax

```
InsertElement(TagName, Position)
```

Description

Use the InsertElement method to insert an element in an XmlNode at the location specified by *Position*.

Parameters

Parameter	Description
<i>TagName</i>	Specify the tagname for the element as a string.
<i>Position</i>	Specify where you want to insert the element, as a number.

Returns

A reference to the newly created element.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &elementNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&elementNode = &dataNode.AddElement("first");  
&elementNode = &dataNode.AddElement("second");  
  
&commentNode = &dataNode.InsertElement("third", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    <first/>  
    <second/>  
  </data>  
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>
```

```
<first/>
<third/>
<second/>
</data>
</root>
```

Related Topics

- [AddElement method: XmlNode class](#)

InsertElementNS method: XmlNode class

Syntax

`InsertElementNS(NamespaceURI, TagName, Position)`

where *NamespaceURI* can have one of the following forms:

`URL.URLname`

OR a string URL, such as

`http://www.example.com/`

Description

Use `InsertElementNS` to insert a new element in an `XmlNode`, at the location specified by *Position*.

Parameters

Parameter	Description
<i>NamespaceURI</i>	Specify the URI that contains the Namespaces for the <code>XmlDoc</code> .
<i>TagName</i>	Specify the name of the element that you want to create, as a string.
<i>Position</i>	Specify where you want to insert the element, as a number.

Returns

A reference to the newly created element.

Example

For example:

```
Local XmlDoc &inXMLDoc;
Local XmlNode &dataNode;
Local XmlNode &elementNode;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root xmlns='http://www.example.com'/>");
```

```
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");
&elementNode = &dataNode.AddElement("first");
&elementNode = &dataNode.AddElement("second");

&elementNode = &dataNode.InsertElementNS("http://www.example.com", "third",
2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>
<root xmlns="http://www.example.com">
  <data>
    <first/>
    <second/>
  </data>
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>
<root xmlns="http://www.example.com">
  <data>
    <first/>
    <third/>
    <second/>
  </data>
</root>
```

InsertEntityReference method: XmlNode class

Syntax

`InsertEntityReference(Name, Position)`

Description

Use the `InsertEntityReference` method to add an entity reference. An entity reference refers to the content of the named entity.

Parameters

Parameter	Description
<i>Name</i>	Specify the name of the entity to which this reference refers to.
<i>Position</i>	Specify where you want to insert the entity reference, as a number.

Returns

A reference to the newly created entity reference.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &dataNode;  
Local XmlNode &entityRef;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&dataNode = &inXMLDoc.DocumentElement.AddElement("data");  
&entityRef = &dataNode.AddEntityReference("first");  
&entityRef = &dataNode.AddEntityReference("second");  
  
&entityRef = &dataNode.InsertEntityReference("third", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    &first;&second;  </data>  
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
  <data>  
    &first;&third;&second;  </data>  
</root>
```

Related Topics

- [AddEntityReference method: XmlNode class](#)

InsertNode method: XmlNode class

Syntax

```
InsertNode(&NewNode, {&RefNode | Position})
```

Description

Use the InsertNode method to insert a new node. The node is inserted either before the node specified by *&RefNode*, or at the location specified by *Position*.

&NewNode refers to an already instantiated XmlNode object. You must create the node before you can insert it.

&RefNode refers to an already instantiated XmlNode object.

Parameters

Parameter	Description
<i>&NewNode</i>	Specify the name of an already instantiated XmlNode that you want to insert.
<i>&RefNode</i> <i>Position</i>	Specify either the name of an existing node or the location where you want the node to be inserted.

Returns

A reference to the newly inserted node.

Example

The following PeopleCode program inserts a node using a position:

```
Local XmlDoc &inXMLDoc, &firstDoc;
Local XmlNode &childNode;

&firstDoc = CreateXmlDoc("<?xml version='1.0'?><myroot><third><child/></third><=>
/myroot>");
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root><first/><second/></root>");
&childNode = &firstDoc.DocumentElement.FindNode("third");

&inXMLDoc.DocumentElement.InsertNode(&childNode, 2);
```

The following PeopleCode program inserts a node using a reference node:

```
Local XmlDoc &inXMLDoc, &firstDoc;
Local XmlNode &childNode, &secondNode;

&firstDoc = CreateXmlDoc("<?xml version='1.0'?><myroot><third><child/></third><=>
/myroot>");
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root><first/><second/></root>");
&childNode = &firstDoc.DocumentElement.FindNode("third");
&secondNode = &inXMLDoc.DocumentElement.FindNode("second");

&inXMLDoc.DocumentElement.InsertNode(&childNode, &secondNode);
```

The following is the XML document before the insert:

```
<?xml version="1.0"?>
<root>
  <first/>
  <second/>
</root>
```

The following is the XML document after the insert:

```
<?xml version="1.0"?>
<root>
  <first/>
  <third>
    <child/>
  </third>
  <second/>
</root>
```

Related Topics

- [AddNode method: XmlNode class](#)

InsertProcessInstruction method: XmlNode class

Syntax

```
InsertProcessInstruction(Target, Data, Position)
```

Description

Use the InsertProcessInstruction method to insert a processing instruction to an XmlNode at the location specified by *Position*.

Note

You cannot use this method with a SoapDoc object.

Parameters

Parameter	Description
<i>Target</i>	Specify the application to which the instruction is directed, as a string.
<i>Data</i>	Specify the data to be used with the instruction.
<i>Position</i>	Specify where you want to insert the process instruction, as a number.

Returns

A reference to the newly created processing instruction.

Example

For example:

```
Local XmlDoc &inXMLDoc;
Local XmlNode &procInst;

&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");
```

```
&procInst = &inXMLDoc.DocumentElement.AddProcessInstruction("first",  
"firstvalue");  
&procInst = &inXMLDoc.DocumentElement.AddProcessInstruction("second",⇒  
"secondvalue");  
  
&procInst = &inXMLDoc.DocumentElement.InsertProcessInstruction("third",⇒  
"thirdvalue", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
  <?first firstvalue?>  
  <?second secondvalue?>  
</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
  <?first firstvalue?>  
  <?third thirdvalue?>  
  <?second secondvalue?>  
</root>
```

Related Topics

- [AddProcessInstruction method: XmlNode class](#)

InsertText method: XmlNode class

Syntax

```
InsertText(Data, Position)
```

Description

Use the InsertText method to insert a text node. The node is inserted at the location indicated by *Position*.

① Note

A text node is *not* the same as a text declaration. The text declaration is added automatically with the CreateXmlDoc function. A text node just contains text within an XmlDocument.

Parameters

Parameter	Description
<i>Data</i>	Specify the data to be used for the text node, as a string.
<i>Position</i>	Specify where you want to insert the text node, as a number.

Returns

A reference to the newly created text node.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &textNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&textNode = &inXMLDoc.DocumentElement.AddText("first text");  
&textNode = &inXMLDoc.DocumentElement.AddText("second text");  
  
&textNode = &inXMLDoc.DocumentElement.InsertText("third text", 2);
```

This is the XML document before the insert:

```
<?xml version="1.0"?>  
<root>  
first textsecond text</root>
```

This is the XML document after the insert:

```
<?xml version="1.0"?>  
<root>  
first textthird textsecond text</root>
```

Related Topics

- [AddText method: XmlNode class](#)

RemoveAllChildNode method: XmlNode class

Syntax

```
RemoveAllChildNode()
```

Description

Use the RemoveAllChildNode method to remove all child nodes for an XmlNode.

Parameters

None.

Returns

None.

Example

For example:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &elementNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("first");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("second");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("third");  
  
&inXMLDoc.DocumentElement.RemoveAllChildNode();
```

This is the XML document before the removal:

```
<?xml version="1.0"?>  
<root>  
  <first/>  
  <second/>  
  <third/>  
</root>
```

This is the XML document after the removal:

```
<?xml version="1.0"?>  
<root/>
```

Related Topics

- [AddNode method: XmlNode class](#)
- [InsertNode method: XmlNode class](#)
- [GetChildNode method: XmlNode class](#)
- [FindNode method: XmlNode class](#)
- [FindNodes method: XmlNode class](#)
- [RemoveChildNode method: XmlNode class](#)

RemoveChildNode method: XmlNode class

Syntax

```
RemoveChildNode({Position | Node})
```

Description

Use the `RemoveChildNode` method to remove the child node in an `XmlNode` specified by *Node*, or located at *Position*.

Parameters

Parameter	Description
<i>Position</i> <i>Node</i>	Specify the child node that you want to delete, either using its position number or its name.

Returns

A reference to the removed `XmlNode`.

Example

The following PeopleCode program uses a position:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &elementNode, &removedNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("first");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("second");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("third");  
  
&removedNode = &inXMLDoc.DocumentElement.RemoveChildNode(2);
```

The following PeopleCode program uses a reference node:

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &elementNode, &removedNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("first");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("second");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("third");  
  
&elementNode = &inXMLDoc.DocumentElement.FindNode("/second");  
&removedNode = &inXMLDoc.DocumentElement.RemoveChildNode(&elementNode);
```

This is the XML document before the removal:

```
<?xml version="1.0"?>  
<root>  
  <first/>  
  <second/>  
  <third/>  
</root>
```

This is XML document after the removal:

```
<?xml version="1.0"?>
<root>
  <first/>
  <third/>
</root>
```

Related Topics

- [AddNode method: XmlNode class](#)
- [InsertNode method: XmlNode class](#)
- [GetChildNode method: XmlNode class](#)
- [FindNode method: XmlNode class](#)
- [FindNodes method: XmlNode class](#)
- [RemoveAllChildNode method: XmlNode class](#)

XmlNode Class Properties

The following are the XmlNode properties.

AttributesCount property: XmlNode class

Description

This property returns the number of attributes for an XmlNode, as a number.

This property is read-only.

Example

```
Local XmlDoc &inXMLDoc;
```

```
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");
&inXMLDoc.DocumentElement.AddAttribute("first", "John");
&inXMLDoc.DocumentElement.AddAttribute("last", "Public");
&inXMLDoc.DocumentElement.AddAttribute("address", "1234 West Eastland");
```

```
For &i = 1 To &inXMLDoc.DocumentElement.AttributesCount
  /* do some processing of the attributes here */
End-For;
```

ChildNodeCount property: XmlNode class

Description

This property returns the number of child nodes for an XmlNode, as a number.

This property is read-only.

Index property: XmlNode class

Description

This property returns the location (or position) of a node in the parent's child list, as a number. The root node always returns a 1.

This property is read-only.

IsNull property: XmlNode class

Description

This property returns a Boolean value, indicating whether the node is a valid node. Use this property to verify the value of the add or insert XmlNode methods.

This property is read-only.

Example

```
Local XmlDoc &inXMLDoc;  
Local XmlNode &elementNode;  
  
&inXMLDoc = CreateXmlDoc("<?xml version='1.0'?><root/>");  
&elementNode = &inXMLDoc.DocumentElement.AddElement("first");  
  
&elementNode = &inXMLDoc.DocumentElement.FindNode("/second");  
  
If &elementNode.IsNull Then  
    /* do some error processing here, will not find "second" */  
End-If;
```

LocalName property: XmlNode class

Description

This property returns the local part of a namespace as a string. The local part is the second part of the namespace entry. If you want access to the first part of a namespace, use the Prefix property.

This property is read-only.

Related Topics

- [Prefix property: XmlNode class](#)

NamespaceURI property: XmlNode class

Description

This property returns a reference to the namespace URI as a string.

This property is read-only.

NextSibling property: XmlNode class

Description

This property returns the next child node in an XmlNode, as an XmlNode.

Use the IsNull property to verify that the XmlNode that is returned is valid.

This property is read-only.

Related Topics

- [IsNull property: XmlNode class](#)

NodeName property: XmlNode class

Description

This property returns the name of the XmlNode as a string. You can use this property to rename an XmlNode.

This property is read/write.

NodePath property: XmlNode class

Description

This property returns the path of the XmlNode, from the root.

This property is read-only.

NodeType property: XmlNode class

Description

This property returns the type of the XmlNode. You can use either a numeric value or a constant. The values are:

Numeric Value	Constant Value	Description
1	%ElementNode	Element node
2	%AttributeNode	Attribute node
3	%TextNode	Text node
4	%CDATASectionNode	CDATA section node
5	%EntityReferenceNode	Entity reference node
6	%EntityNode	Entity node
7	%ProcessingInstructionNode	Processing instruction node
8	%CommentNode	Comment node
9	%DocumentNode	Document node
10	%DocumentTypeNode	Document type node
11	%NotationNode	Notation node
12	%XmlDeclNode	XML DECL node

NodeValue property: XmlNode class

Description

This property returns the value of the XmlNode, as a string.

This property is read/write.

ParentNode property: XmlNode class

Description

This property returns a reference to the parent node for the XmlNode, as an XmlNode object.

Use the IsNull property to verify that the XmlNode that is returned is valid.

This property is read-only.

Related Topics

- [IsNull property: XmlNode class](#)

Prefix property: XmlNode class

Description

This property returns the prefix part of a namespace as a string. The prefix is the first part of the namespace entry. If you want access to the second part of a namespace, use the LocalName property.

This property is read-only.

Related Topics

- [LocalName property: XmlNode class](#)

PreviousSibling property: XmlNode class

Description

This property returns a reference to the previous node in the XmlNode, as an XmlNode object.

Use the IsNull property to verify that the XmlNode that is returned is valid.

This property is read-only.

Related Topics

- [IsNull property: XmlNode class](#)

Using the XmlDocumentFactory Class

The XmlDocumentFactory class allows the processing of basic XML text strings that are otherwise too large to be loaded into a single XmlDocument instance.

The programmer sets specific node names to be searched for. The XmlDocFactory parses the input string looking for nodes that match said pattern. Once found, an XmlDocument object is created from that string using the found node as the root node of the new document.

Typical usage would be to traverse the entire input string looking for all such occurrences of the target string, creating new XmlDocument objects until no more can be created. In PeopleCode, that would look similar to this:

```
Local XmlDocument &theXmlDocFactory;  
Local XmlDocument &theXmlDoc;  
Local string &findString = "Transaction";  
  
&theXmlDocFactory = CreateXmlDocFactory();  
  
&returnbool = &theXmlDocFactory.SetStringToParse(&inputXmlString);  
  
&theXmlDoc = &theXmlDocFactory.GetNextXmlDoc(&findString);  
  
While ( Not &theXmlDoc.IsNull)  
    rem do something with the XmlDocument;  
    &theXmlDoc = &theXmlDocFactory.GetNextXmlDoc(&findString);  
End-While;
```

In the preceding example, the GetNextXmlDoc method is called repeatedly until a null XmlDocument object is returned; this signifies that the XmlDocFactory object has reached the end of the input string.

There are two caveats when using the XmlDocfactory class:

- The input string must remain in scope for the duration of processing. Because such strings are typically large, the factory does not make a local copy of the string. It uses the original string passed to it. If the original string goes out of scope or becomes null, the factory processing will fail.
- The XmlDocFactory object must be declared as a local variable only. Component and global scope are not supported.

Related Topics

- PeopleCode Language Reference: CreateXmlDocFactory function

XmlDocFactory Class Methods

In this section, the XmlDocFactory class methods are presented in alphabetical order.

GetNextXmlDoc method: XmlDocumentFactory class

Syntax

```
GetNextXmlDoc(nodeName)
```

Description

Use the GetNextXmlDoc method to retrieve the next XML subtree matching the given *nodeName* parameter.

The node name can be a single name, or a list of names separated by a forward slash. For example:

- "Transaction" returns an XML subtree with Transaction as the root.
- "Transaction/Date" returns an XML subtree in which Date has a parent node Transaction.

Matching occurs when a node name in the input string matches all of the characters in the *nodeName* parameter. For example:

- "Trans" matches nodes in the XML string with those leading characters. For example: Transaction, Transparent, and Transport.
- "Trans/Date" matches all Date nodes in the input string that have a parent like Transaction, Transparent, or Transport.

Finally, the wildcard * matches any node. Therefore, "Trans/Date/*" matches any node that has a parent matching Date, which in turn has a parent matching Trans.

Parameters

Parameter	Description
<i>nodeName</i>	A case-sensitive string containing the identifier for the nodes to find

Returns

An XmlDocument object containing a matching XML subtree, in which case, the IsNull property of the XmlDocument object is set to False.

Otherwise, when nothing is found, the IsNull property of the XmlDocument object is set to True.

Example

```
Local XmlDocumentFactory &theXmlDocFactory;  
Local XmlDocument &theXmlDoc;  
Local string &findString = "Transaction";  
  
&theXmlDocFactory = CreateXmlDocFactory();  
  
&returnbool = &theXmlDocFactory.SetStringToParse(&inputXmlString);  
  
&theXmlDoc = &theXmlDocFactory.GetNextXmlDoc(&findString);  
  
While ( Not &theXmlDoc.IsNull)  
    rem do something with the XmlDoc;  
    &theXmlDoc = &theXmlDocFactory.GetNextXmlDoc(&findString);  
End-While;
```

Related Topics

- [IsNull property: XmlDocument class](#)

SetNamespaceString method: XmlDocFactory class

Syntax

```
SetNamespaceString(namespaceString)
```

Description

For certain XML structures, namespace declarations are separate from nodes using those namespaces. The SetNamespaceString method allows a namespace string to be inserted back into the output document. If this operation is not performed, there can be parsing errors when the output XmlDocument is created.

For example, the following is the input XML to the XmlDocumentFactory object:

```
<?xml version="1.0"?>
<ns1:transaction xmlns:qed="http://www.blue.com" xmlns:ns1="http://
www.transaction.com">
  <purchaseOrder>
    <qed:electronics>
      <item>TV</item>
    </qed:electronics>
  </purchaseOrder>
</ns1:transaction>
```

The GetNextXmlDoc method is used to extract the electronics subtree:

```
<?xml version="1.0"?>
<qed:electronics>
  <item>TV</item>
</qed:electronics>
```

The resulting XML is actually invalid, as the namespace information for the prefix qed has been lost.

The following invocation of the SetNamespaceString method results in the namespace info being re-added:

```
&theXmlDocFactory.SetNamespaceString(" xmlns:qed='http://www.blue.com' ")
```

Important

There should be leading and trailing spaces in the namespace parameter being set.

The resulting XML document can be parsed:

```
<?xml version="1.0"?>
<qed:electronics xmlns:qed="http://www.blue.com">
  <item>TV</item>
</qed:electronics>
```

Parameters

Parameter	Description
<i>namespaceString</i>	The namespace string to be added back into the XML document. Important: There should be leading and trailing spaces in the namespace parameter being set.

Returns

A Boolean value: True if the namespace string is set, False otherwise.

Example

```
Local XmlDocFactory &theXmlDocFactory;  
  
&theXmlDocFactory = CreateXmlDocFactory();  
  
&returnbool = &theXmlDocFactory.SetStringToParse(&inputXmlString);  
  
&returnbool = &theXmlDocFactory.SetNamespaceString(" xmlns:qed='http://  
www.blue.com' ");  
  
Local XmlDoc &theXmlDoc;  
  
&theXmlDoc = &theXmlDocFactory.GetNextXmlDoc("qed:elec");  
  
While ( Not &theXmlDoc.IsNull)  
    rem do something with the XmlDoc;  
    &theXmlDoc = &theXmlDocFactory.GetNextXmlDoc(&findString);  
End-While;
```

SetStringToParse method: XmlDocFactory class

Syntax

```
SetStringToParse(xmlstring)
```

Description

Use the SetStringToParse method to set the XML string to be parsed by the XmlDocFactory object.

The XmlDocFactory class is not a full-featured XML parser. Strings to be parsed must be well-formed XML; otherwise the parsing will not work. In addition, the XmlDocFactory does not make a copy of the string to be parsed; as a result the string must remain in scope for the duration of processing.

Parameters

Parameter	Description
<i>xmlstring</i>	A string containing well-formed XML.

Returns

A Boolean value: True if the XML string is set, False otherwise.

Example

```
Local XmlDocFactory &theXmlDocFactory;  
  
&theXmlDocFactory = CreateXmlDocFactory();  
  
&returnbool = &theXmlDocFactory.SetStringToParse(&inputXmlString);  
  
Local XmlDoc &theXmlDoc;  
  
&theXmlDoc = &theXmlDocFactory.GetNextXmlDoc("Transaction");
```

Quick Reference for PeopleCode Classes

PeopleCode Syntax Quick Reference

Typographical Conventions

The following topic describes typographical conventions that apply to PeopleCode and are used throughout PeopleSoft documentation: Using and Managing the PeopleSoft Online Help: Typographical Conventions

PeopleCode Syntax

The following table describes the complete syntax for the PeopleCode language:

Term	Syntax
Program	ImportList (DeclList TopStList ClassDefn)
ImportList	[ImportDecl ';']...
ImportDecl	'import' PackageName [':' '*']
PackageName	Id [':' Id]...
ClassDefn	ClassDecl [';' ExtDecls] [';' MethodDefns]
ClassDecl	'class' 'interface' Id [Extends] [ClassPublics] [ClassProtecteds] [ClassPrivates] 'end-class' 'end-interface'
Extends	'extends' 'implements' QualifiedId
QualifiedId	[PackageName ':'] Id
ClassPublics	ClassPublic [';' ClassPublic]...
ClassPublic	MethodDecl PropertyDecl
MethodDecl	'method' Id '(' [MethodParameters] ')' ['abstract'] ['returns' PeopleCodeType]
MethodParameters	MethodParameter [';' MethodParameter]...
MethodParameter	'&' Id 'as' PeopleCodeType ['out']
PropertyDecl	'property' PeopleCodeType Id [('get' ['set'] 'abstract') 'readonly']
ClassPrivates	'private' [ClassPrivate [';' ClassPrivate]...]
ClassPrivate	MethodDecl InstanceDecl ConstantDecl
ClassProtecteds	'protected' [ClassProtected [';' ClassProtected]...]
ClassProtected	MethodDecl InstanceDecl ConstantDecl
InstanceDecl	'instance' VarDeclare
ExtDecls	ExtDecl [';' ExtDecl]...
MethodDefns	MethodDefn [';' MethodDefn]...
MethodDefn	MethodMethod GetMethod SetMethod

Term	Syntax
MethodMethod	'method' Id StList 'end-method'
GetMethod	'get' Id StList 'end-get'
SetMethod	'set' Id StList 'end-set'
TopStList	TopStmt [';' TopStmt]...
TopStmt	Stmt
StList	Stmt [';' Stmt]...
Stme	[LValue [Assign] If Evaluate While Repeat For Accept Break Return Exit Error Warning Try Throw LocalDecl]
Assign	'=' Expression
If	'if' LogicalExpression 'then' StList ['else' StList] 'end-if'
Evaluate	'evaluate' Expression [WhenExpr... StList]... ['when-other' StList] 'end-evaluate'
WhenExpr	'when' [RelOp] Expression
While	'while' LogicalExpression StList 'end-while'
Repeat	'repeat' StList 'until' LogicalExpression
For	'for' Variable '=' Expression 'to' Expression ['step' Expression] StList 'end-for'
Accept	'accept'
Return	'return' [Expression]
Break	'break'
Exit	'exit' [Expression]
Warning	'warning' Expression
Error	'error' Expression
Try	'try' StList ('catch' QualifiedId '&' Id StList)... 'end-try'
Throw	'throw' Expression
LocalDecl	'local' PeopleCodeType '&' Id [(',' '&' Id)... '=' Expression]
Continue	'Continue'
LogicalExpression	LogicalTerm ['or' LogicalTerm]...
LogicalTerm	Relation ['and' Relation]...
Relation	'not' Relation Expression [Relop Expression]
Relop	'not' Relop '<' '<=' '=' '>=' '>' '!= ' '<>'
Expression	Term [('+' '-' ' ') Term]...
Term	Power [('*' '/') Power]...
Power	Primary ['**' Primary]...
Primary	LValue ['as' QualifiedId] Number String 'true' 'false' 'null' '-' Primary 'create' QualifiedId Call
LValue	LValueStart [LValueObject LValueSubscript]...

Term	Syntax
LValueStart	Variable Id Call '@' Primary '%' BuiltinVar '(' LogicalExpression ')'
LValueObject	'.' Id [Call] Call
LValueSubscript	'[' Expression [',' Expression]... ']'
Variable	'&' Id Id ['(' (Id String)) '^'
Call	'(' [Expression [',' Expression]...] ')'
Constant	Number String 'true' 'false' 'null' QualifiedId ':' Id
DeclList	[Decl ';']...
Decl	'local' VarDeclare 'function' Function ConstDecl ExtDecl
VarDeclare	PeopleCodeType '&' Id [',' '&' Id]...
Function	Id ['(' InternalParameters ')'] ['returns' PeopleCodeType] ['noexport'] ['doc' String] TopStList 'end-function'
InternalParameters	[InternalParameter [',' InternalParameter]...]
InternalParameter	'&' Id ['as' PeopleCodeType]
ConstDecl	'constant' '&' Id '=' (Number String 'true' 'false' 'null')
ExtDecl	'global' VarDeclare 'component' VarDeclare 'declare' Declare
Declare	'function' Id ('library' DeclareLibrary 'peoplecode' DeclarePC)
DeclareLibrary	String ['alias' String] ['(' ExternalParameters ')'] ['returns' ExternalType ['as' PeopleCodeType]]
ExternalParameters	[ExternalParameter [',' ExternalParameter]...]
ExternalParameter	ExternalType ['value' 'ref'] ['as' PeopleCodeType]
DeclarePC	Variable EventType
PeopleCode Type	['array' 'of']... ('number' 'string' 'date' 'time' 'datetime' 'any' 'boolean' 'object' 'array' 'integer' 'float' QualifiedId)
ExternalType	'boolean' 'integer' 'long' 'uinteger' 'ulong' 'string' 'lstring' 'ustring' 'float' 'double'

Desupported Items and PeopleCode No Longer Supported

This section discusses desupported items and PeopleCode that is no longer supported.

Desupported Products and Classes

The following products and their supporting classes have been desupported:

- BPEL support
 - AsyncFFSend class

- BPELUtil class
- IBUtil class
- Instant Messaging (MCF)
 - MCFIMInfo class and methods
 - MCFIMSingleButton class, methods, and properties
- Mobile Application Platform
 - Map class, methods, and properties
 - MapPage class, methods, and properties
 - MapElement class, methods, and properties
 - MapFluid class and methods

For a complete list of desupported methods and properties, see [Desupported Mobile Application Platform Items](#).

- Oracle Policy Automation
 - ProcessRequest class
 - ProcessRequest method
- PeopleSoft Business Interlinks
 - Business Interlinks class
 - BIDocs class
- PeopleSoft Mobile Agent
 - Mobile class
 - PropertyInfo collection
 - CI collection
 - Data collection
 - ListViewAttrs class
 - PropertyAttrs class
 - PeerDefaultAttributes class
 - SyncServer class
- Verity search classes
 - SearchQuery class.
 - ParseResult collection.
 - ParseResult class.
 - SearchResult collection.
 - SearchResult class.
 - SearchField collection.
 - SearchField class.
 - SearchIndex collection.
 - SearchIndex class.
 - SearchRecord Options class.

- SearchRecordField collection.
- SearchRecordField class.
- Search Language collection.
- Search Language class.
- Search Schedule collection.
- Search Schedule class.
- Search HTTP Options class.
- Search FS Options class.
- Search Start Options collection.
- Search Start Options class.

Desupported Functions, Methods, and Properties

The following are the built-in functions, methods, properties that have been desupported.

Method or Property	Use Instead
ActionItem class, AssignType property.	ActionItem class, getAssignments/ saveAssignments
ActionItem class, AssignedToOprid property.	ActionItem class, getAssignments/ saveAssignments
Chart class, Refresh method	Chart class, SetData method Chart class, SetOldData method
Chart class, SetDataAnnotations method.	Chart class, SetDataLabel and SetDataLabelPosition methods.
Chart class, SetDataGlyphScale method.	Chart class, SetDataZAxis method.
Chart class, SetGlyphArray method.	NA
Chart class, SetOldDataAnnotations method.	NA
Chart class, SetOldDataGlyphScale method.	NA
Chart class, GridLines property.	Use the PSVERTICALGRIDLINES and PSHORIZONTALGRIDLINES style classes instead to control grid line visibility and style.
Chart class, GridLineType property.	Use the PSVERTICALGRIDLINES and PSHORIZONTALGRIDLINES style classes instead to control grid line visibility and style.
Chart class, HighlightSelectedDataPoint property.	Use the DataSelectionMode property, the SetSelectedData method, and the ChartClientState class to manage data item selection in charts.
Chart class, IsTrueXY property.	NA
Chart class, LegendStyle property.	NA
Chart class, LineChartDataGlyphSize property.	NA
Chart class, LineType property.	NA
Chart class, MainTitleOrient property.	NA
Chart class, MainTitleStyle property.	Use TitleStyle property.
Chart class, OLLineType property.	NA

Method or Property	Use Instead
Chart class, OverrideSystemDefaultforAccessibility property.	NA
Chart class, RevertToPre850 property.	NA
Chart class, RotationAngle property.	NA
Chart class, SetChartURL property.	Use the ChartURL property.
Chart class, ShowCrossHair property.	NA
Chart class, Style property.	NA
Chart class, StyleSheet property.	NA
Chart class, SubTitleAlignment property.	Use the TitleAlignment property that controls the alignment of both title and subtitle.
Chart class, XAxisCross property.	NA
Chart class, XAxisCrossPoint property.	NA
Chart class, XAxisLabelOrient property.	NA
Chart class, XAxisScaleResolution property.	NA
Chart class, XAxisStyle property.	NA
Chart class, XAxisTitleOrient property.	NA
Chart class, XAxisTitleStyle property.	NA
Chart class, XRotationAngle property.	NA
Chart class, YAxisCrossPoint property.	NA
Chart class, YAxisLabelOrient property.	NA
Chart class, YAxisScaleResolution property.	NA
Chart class, YAxisStyle property.	NA
Chart class, YAxisTitleOrient property.	NA
Chart class, YAxisTitleStyle property.	NA
Chart class, YRotationAngle property.	NA
Chart class, ZRotationAngle property.	NA
CreateMCFIMInfo function.	NA
Gantt class, Refresh method	Gantt class, SetTaskAppData method Gantt class, SetTaskData method
Gantt class, SetDayFormat method: %Chart_DayFormat_DOY_2Digit constant.	This constant has been desupported; if specified, it defaults to %Chart_DayFormat.
Gantt class, SetHourFormat method.	The hour format is determined by a user's personalization settings.
Gantt class, SetLegend method.	NA
Gantt class, SetMinuteFormat method.	The minute format is determined by a user's personalization settings.
Gantt class, SetSecondFormat method.	The second format is determined by a user's personalization settings.
Gantt class, SetTableXScrollbar method.	NA
Gantt class, SetTaskExpanded method.	NA
Gantt class, SetTaskHints method.	NA

Method or Property	Use Instead
Gantt class, SetYearFormat method: %Chart_YearFormat constant.	This constant has been desupported; if specified, it defaults to %Chart_YearFormat _4Digit.
Gantt class, DataEndDateTime property.	NA
Gantt class, DataStartDateTime property.	NA
Gantt class, DataStartRow property.	NA
Gantt class, DataWidth property.	NA
Gantt class, HasLegend property.	NA
Gantt class, ImageMap property.	NA
Gantt class, IsPlainImage property.	NA
Gantt class, LegendPosition property.	NA
Gantt class, LegendStyle property.	NA
Gantt class, MainTitle property.	NA
Gantt class, MainTitleStyle property.	NA
Gantt class, RevertToPre850 property.	NA
Gantt class, StyleSheet property.	NA
Gantt class, XAxisPosition property.	NA
Gantt class, YAxisPosition property.	NA
MCFIMInfo class	All methods have been desupported.
MCFIMSingleButton class	All methods and properties have been desupported.
OrgChart class, SetIMData method.	NA
OrgChart class, SetIMRecord method.	NA
OrgChart class, IMPresence property.	NA
OrgChart class, IMRefreshInterval property.	NA
Query class, RunToTemplate method	No longer supported. This method remains in PeopleTools for PeopleSoft internal use only and should not be implemented in PeopleCode programs.
Session class, Connect method	%Session system variable
Session class FindTree, FindTreeStructure methods	GetTree, GetTreeStructure session class methods (respectively)
ShouldSuppressCREF function	NA
Tree collection	All tree collection methods and properties have been desupported. Use GetTree to access a tree instead.
Tree structure collection	All tree structure collection methods and properties have been desupported. Use GetTreeStructure to access a tree structure instead.
Item tree branch collection method, and the First, Last, and Next tree branch collection properties	NA

Method or Property	Use Instead
Tree class methods:	NA
- FindNextDisplayObject - FindPreviousDisplayObject	
Tree class properties:	NA
- CheckLeafUserData - DisplayLeaf - DisplayNode - IsReadOnly	

Chart Items No Longer Supported

In PeopleTools 8.57, the DialGauge class including its methods and properties is not supported.

Desupported BI Publisher Items

As of PeopleTools 8.50, a number of BI Publisher (formerly XML Publisher) classes, methods and properties have been desupported. These items remain in PeopleTools for backward compatibility only.

Desupported BI Publisher Methods

Desupported Method	Use Instead
ReportDefn class, SetRuntimeDataRowset method Note: The rowset data source has been desupported.	Convert the rowset to an XML file—for example, using the file layout capabilities of the File class is one way to accomplish this. Then, use the SetRuntimeDataXMLFile method of the ReportDefn class to process the XML file as a data source.
ReportDefn class, SetRuntimeDataXMLDoc method Note: The XmlDoc data source has been desupported.	Convert the XmlDoc object to an XML file—for example, using the genXmlFile method of the XmlDoc class is one way to accomplish. Then, use the SetRuntimeDataXMLFile method of the ReportDefn class to process the XML file as a data source.
Note: The rowset data source has been desupported. RowsetDS class:	Convert the rowset to an XML file—for example, using the file layout capabilities of the File class is one way to accomplish this. Then, use the SetRuntimeDataXMLFile method of the ReportDefn class to process the XML file as a data source.
- AddXMLData method - AddXSDSchema method - GetXMLData method - GetXSDSchema method - RowsetDS method	

Desupported BI Publisher Properties

Desupported Property	Use Instead
OutputEditable	Use the Report Definition-Definition page (PSXPRPTPROP) to set report properties to override global properties.

BI Publisher Items No Longer Supported

As of PeopleTools 8.50, a number of BI Publisher (formerly XML Publisher) classes, methods and properties are no longer supported. These items remain in PeopleTools for PeopleSoft internal use only and should not be implemented in PeopleCode programs.

- All methods and properties of the DataSourceDefn class.
- Certain methods and properties of the ReportDefn class.
- All methods and properties of the TemplateDefn class.
- All methods and properties of the TemplateFile class.
- All methods and properties of the TranslationFile class.
- All methods of the XMLPManager class.
- All methods of the QueryDS class.
- All methods and properties of the EFTPRocessor class.
- All methods and properties of the FOProcessor class.
- All methods and properties of the FormProcessor class.
- All methods and properties of the FOUtility class.
- All methods and properties of the PDFMapTool class.
- All methods and properties of the RTFProcessor class.

DataSourceDefn Class Methods

Method	Use Instead
DataSourceDefn(<i>DataSourceID</i> , <i>DataSourceType</i> , <i>Public</i>)	NA
Get()	NA
GetData(& <i>PromptRecord</i>)	NA
GetSampleData()	NA
GetSchema	NA

DataSourceDefn Class Properties

Property	Use Instead
ActiveFlag	NA
Description	NA
IsPublic	NA
LastUpdatedBy	NA
LastUpdateDTTM	NA
Name	NA
ObjectOwnerId	NA
RegisteredBy	NA
RegisteredDTTM	NA
Type	NA

ReportDefn Class Methods

Method	Use Instead
GetActiveTemplatesByDistributionChannel(<i>DistributionChannel, AsOfDate</i>)	NA
GetDataSource()	NA
GetDefaultTemplate()	NA
GetTemplate(<i>TemplateID</i>)	NA
GetTemplateList()	NA
ProcessEtextReport(<i>TemplateID, LanguageCd, AsOfDate</i>)	ReportDefn class, ProcessReport method

ReportDefn Class Properties

Property	Use Instead
AllowRecipientEntry	NA
AllowViewerEntry	NA
ArchiveAfter	NA
BurstFieldName	NA
CategoryId	NA
ID	NA
IsReadOnly	NA
LastUpdateDTTM	NA
LastUpdatedOprId	NA
ObjectOwnerId	NA
RegisteredBy	NA
RegisteredDTTM	NA
SecurityFieldName	NA
SecurityIdType	NA
SecurityJoinTable	NA
TemplateControlFieldName	NA

TemplateDefn Class Methods

Method	Use Instead
TemplateDefn(<i>TemplateID</i>)	NA
Get()	NA
GetActiveTemplateFile(<i>AsOfDate</i>)	NA
GetTemplateFile()	NA
GetTemplateFileList()	NA

TemplateDefn Class Properties

Property	Use Instead
Description	NA
DistributionChannel	NA
ID	NA
IsReadOnly	NA
IsSubTemplate	NA
LanguageCode	NA
LastUpdateDTTM	NA
LastUpdatedOprId	NA
ObjectOwnerId	NA
RegisteredBy	NA
RegisteredDTTM	NA
ReportCategoryId	NA
Type	NA

TemplateFile Class Methods

Method	Use Instead
TemplateFile(&TemplateDefn, EffDate)	NA
GetFile()	NA
GetMapFile()	NA
GetTranslationFile(LanguageCD)	NA
GetTranslationFileList()	NA

TemplateFile Class Properties

Property	Use Instead
EffectiveDate	NA
FileName	NA
MapFileName	NA
Status	NA

TranslationFile Class Method

Method	Use Instead
TranslationFile(&TemplateDefn, EffectiveDate, LanguageCode)	NA
GetFile()	NA

TranslationFile Class Properties

Property	Use Instead
Description	NA
FileName	NA
LanguageCode	NA
Status	NA

XMLPManager Class Methods

Method	Use Instead
GetDatasourceDefnList(<i>DataSourceId</i> , <i>DataSourceIdOp</i> , <i>DataSourceType</i> , <i>Owner</i> , <i>Descr</i> , <i>DescrOp</i> , <i>ObjectOwnerId</i> , <i>Active</i> , <i>CaseSensitive</i>)	NA
GetReportDefnList(<i>ReportID</i> , <i>ReportIdOp</i> , <i>Descr</i> , <i>DescrOp</i> , <i>TemplateId</i> , <i>TemplateIdOp</i> , <i>TemplateDescr</i> , <i>TemplateDescrOp</i> , <i>DatasourceType</i> , <i>DataSourceId</i> , <i>DataSourceIdOp</i> , <i>DataSourceOwner</i> , <i>TemplateType</i> , <i>ReportCategoryId</i> , <i>ReportStatus</i> , <i>CaseSensitive</i>)	NA
GetTemplateDefnList(<i>TemplateId</i> , <i>TemplateIdOp</i> , <i>Descr</i> , <i>DescrOp</i> , <i>TemplateType</i> , <i>DistChannel</i> , <i>ReportCategoryId</i> , <i>IsSubtemplate</i> , <i>CaseSensitive</i>)	NA

QueryDS Class Methods

Method	Use Instead
QueryDS()	NA
GetXMLData(& <i>Query</i> , & <i>Rowset</i> , <i>XSDLocation</i>)	NA
GetXMLSampleData(& <i>Query</i> , & <i>Rowset</i> , <i>Rows</i> , <i>XSDLocation</i>)	NA
GetXSDSchema(& <i>Query</i>)	NA

ETFPProcessor Class Methods

Method	Use Instead
EFTProcessor()	
GenerateOutput(<i>EFTFile</i> , <i>XMLDataFile</i> , <i>OutputFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method
GenerateXSL(<i>RTFTemplateFile</i> , <i>XSLOutputFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method

EFTProcessor Class Properties

Property	Use Instead
ConfFile	ReportDefn class, ProcessReport method
ConfProp	ReportDefn class, ProcessReport method

FOProcessor Class Methods

Method	Use Instead
FOProcessor()	ReportDefn class, ProcessReport method
GenerateMergedOutput(&XSLTemplateFileArray, &XMLDataFileArray, &XliffFileArray, OutputFileName, OutputFormat, Error)	ReportDefn class, ProcessReport method
GenerateMergedOutputFO(&FOFileArray, OutputFile, OutputFormat, Error)	ReportDefn class, ProcessReport method
GenerateOutput(XSLTemplateFile, XMLDataFile, XliffFile, OutputFile, OutputFormat, Error)	ReportDefn class, ProcessReport method
GenerateOutputFO(FOFileName, OutputFile, OutputFormat, Error)	ReportDefn class, ProcessReport method

FOProcessor Class Properties

Property	Use Instead
ConfFile	ReportDefn class, ProcessReport method
ConfProp	ReportDefn class, ProcessReport method
Locale	ReportDefn class, ProcessReport method

FormProcessor Class Methods

Method	Use Instead
FormProcessor()	ReportDefn class, ProcessReport method
ExtractFieldNames(PDFTemplateFileName, IncludeReservedNames, FieldNameArray, Error)	ReportDefn class, ProcessReport method
ExtractFieldValues(PDFTemplateFileName, IncludeReservedNames, FieldValueArray, Error)	ReportDefn class, ProcessReport method
FillForm(PDFTemplateFile, XMLDataFile, PDFOutputFile, Error)	ReportDefn class, ProcessReport method

FormProcessor Class Properties

Property	Use Instead
ConfFile	ReportDefn class, ProcessReport method
ConfProp	ReportDefn class, ProcessReport method
Locale	ReportDefn class, ProcessReport method

FOUtility Class Methods

Method	Use Instead
FOUtility()	ReportDefn class, ProcessReport method
GenerateFO(<i>XSLFile</i> , <i>XMLDataFile</i> , <i>OutputFOFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method
MergeFOs(<i>&FOFileArray</i> , <i>OutputFOFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method

FOUtility Class Property

Property	Use Instead
Prop	ReportDefn class, ProcessReport method

PDFMapTool Class Methods

Method	Use Instead
PDFMapTool()	ReportDefn class, ProcessReport method
EnableMap(<i>XSDFile</i> , <i>PDFTemplateFile</i> , <i>XMLInputFile</i> , <i>PDFOutputFile</i>)	ReportDefn class, ProcessReport method
extractMap(<i>PDFFile</i> , <i>OutMapFile</i>)	ReportDefn class, ProcessReport method
processForm(<i>PDFTemplateFile</i> , <i>XMLDataFile</i> , <i>MapFile</i> , <i>OutputPDFFile</i>)	ReportDefn class, ProcessReport method

PDFMapTool Class Property

Property	Use Instead
Locale	ReportDefn class, ProcessReport method

RTFProcessor Class Methods

Method	Use Instead
RTFProcessor()	ReportDefn class, ProcessReport method
GenerateXSL(<i>RTFTemplateFile</i> , <i>XSLOutputFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method
GenerateXSLXliff(<i>RTFTemplateName</i> , <i>XSLOutputFile</i> , <i>XliffOutputFile</i> , <i>Error</i>)	ReportDefn class, ProcessReport method

RTFProcessor Class Properties

Property	Use Instead
ConfFile	ReportDefn class, ProcessReport method
ConfProp	ReportDefn class, ProcessReport method
Locale	ReportDefn class, ProcessReport method

Desupported Mobile Application Platform Items

The Mobile Application Platform has been desupported. The desupported methods and properties are listed here:

Desupported Map Class Methods

Desupported Methods	Use Instead
AddAttribute	NA
AddMetaTag	NA
ClearAttributes	NA
DeleteAttribute	NA
DeleteMetaTag	NA
GetAJAXName	NA
GetAJAXNonSerializedData	NA
GetAJAXValue	NA
GetAJAXValueByName	NA
GetAttributeName	NA
GetAttributeValue	NA
GetAuthToken	NA
GetAuthTokenDomain	NA
GetCSS	NA
GetCustDocument	NA
GetDocument	NA
GetElement	NA
GetExceptionDocument	NA
GetExceptionURIDocument	NA
GetJavaScript	NA
GetMetaTagName	NA
GetNumberOfAJAXParms	NA
GetNumberOfAttributes	NA
GetNumberOfMetaTags	NA
GetPage GetPortaName	NA
GetPortalNodeName	NA
GetURIDocument	NA
GetWebServerInfo	NA
LoadState	NA
SetCSS	NA
SetJavaScript	NA
SetOvrAJAXDocument	NA
StateExists	NA
ValidateSessionID	NA

Desupported Map Class Properties

Desupported Property	Use Instead
BrowserDeviceType	NA
BrowserPlatform	NA
DeviceCanvas	NA
DeviceDatePicker	NA
DeviceDnd	NA
DeviceDtPicker	NA
DeviceGeoLocation	NA
DeviceHC	NA
DeviceHeight	NA
DeviceHistory	NA
DeviceLocalStorage	NA
DevicePixelRatio	NA
DevicePostMessages	NA
DeviceSessionStorage	NA
DeviceSVG	NA
DeviceTimePicker	NA
DeviceTouch	NA
DeviceWebSockets	NA
DeviceWebWorkers	NA
DeviceWidth	NA
ExceptionLayoutName	NA
IsIBBaseDomain	NA
LayoutName	NA
MAPException	NA
MAPURL	NA
NoBackButtonUpdate	NA
PIAOriginLabel	NA
PIAOriginURL	NA
PSBackLabel	NA
PSBackOrigin	NA
PSBackURL	NA
RAClass	NA
RAImage	NA
RAPopupClass	NA
RASyle	NA
RequestNodeFromToken	NA
SecureRequest	NA
StateEnabled	NA
StateID	NA

Desupported Property	Use Instead
StateLoaded	NA
SystemStatus	NA
Title	NA
URIResourceIndex	NA
Validation	NA

Desupported MapPage Class Methods

Desupported Method	Use Instead
GetElement	NA

Desupported MapPage Class Properties

Desupported Property	Use Instead
BackButtonTheme	NA
Cache	NA
ContentClassName	NA
ContentStyle	NA
ContentTheme	NA
FormTransition	NA
ID	NA
IsExternalPage	NA
MainClassName	NA
MainStyle	NA
MainTheme	NA
Name	NA
PreLoad	NA
SubPage	NA
TemplateName	NA
Transition	NA
VisualBackButton	NA

Desupported MapElement Class Methods

Desupported Method	Use Instead
GetJavaScript	NA
GetListviewDefinedItemClass	NA
GetListviewDefinedItemHidden	NA
GetListviewDefinedItemStyle	NA
GetListviewItemClass	NA
GetListviewItemHidden	NA

Desupported Method	Use Instead
GetListViewItemStyle	NA
GetMobileGridClass	NA
GetMobileGridStyle	NA
SetJavaScript	NA
SetListViewDefinedItemClass	NA
SetListViewDefinedItemHidden	NA
SetListViewDefinedItemRowControl	NA
SetListViewDefinedItemStyle	NA
SetListViewDisableURL	NA
SetListViewItemClass	NA
SetListViewItemHidden	NA
SetListViewItemRowControl	NA
SetListViewItemStyle	NA
SetListViewRowControl	NA
SetMobileGridClass	NA
SetMobileGridStyle	NA
SetTableColumnProperty	NA
SetTableGridRowControl	NA

Desupported MapElement Class Properties

Desupported Property	Use Instead
AccessibilityText	NA
ActionSheetCloseButton	NA
AjaxURL	NA
ButtonAlternativeURL	NA
ButtonGroupControl	NA
ButtonIcon	NA
ButtonIconLocation	NA
ButtonInline	NA
ButtonLocation	NA
ButtonMini	NA
ButtonRemoveCorner	NA
ButtonRemoveIconShadow	NA
ButtonRemoveShadow	NA
ClassName	NA
ContClassName	NA
ContPopup	NA
ContPopupBtnTheme	NA
ContPopupButtonPos	NA
ContPopupIcon	NA

Desupported Property	Use Instead
ContPopupIconLocation	NA
ContPopupOverlyTheme	NA
ContPopupPos	NA
ContPopupType	NA
Controls	NA
ContStyle	NA
ContTheme	NA
DialogCloseOption	NA
DialogOverlayTheme	NA
ElementType	NA
FieldContClass	NA
FieldContSyle	NA
FixedDisplayFormat	NA
FlipToggleHighlight	NA
FlipToggleMini	NA
FlipToggleTrackTheme	NA
FullScreen	NA
GridOption	NA
GridRowClass	NA
GridRowStyle	NA
GridScroll	NA
GroupLabelText	NA
HideListViewSplitButton	NA
ImageOvrd	NA
InputMini	NA
InputRequired	NA
LabelID	NA
LabelText	NA
ListViewAlternativeURL	NA
ListViewCollapsed	NA
ListViewCollapsible	NA
ListViewCountTheme	NA
ListViewDividerDisplay	NA
ListViewDividerMsgCat	NA
ListViewFilterTheme	NA
ListViewHeaderTheme	NA
ListViewInset	NA
ListViewSplitIcon	NA
ListViewSplitTheme	NA
ListViewType	NA

Desupported Property	Use Instead
ListviewURLJavaScript	NA
MenuItem	NA
MenuItemLocation	NA
MenuItem	NA
MenuItemMini	NA
MenuItemMultiple	NA
MenuItemNonNative	NA
MenuItemOverlayTheme	NA
MenuItemRemoveCorner	NA
MenuItemRemoveShadow	NA
NoCustomContainer	NA
NoGridAutoWidth	NA
NoGridFilter	NA
NoGridInfo	NA
NoGridPageinate	NA
NoGridPageLengthChange	NA
NoGridSort	NA
PlugIn	NA
PreSelected	NA
RefLayoutCont	NA
RefLayoutContHidden	NA
RefLayoutHidden	NA
RowCountLabel	NA
SaveNoPopup	NA
SaveRedirect	NA
SecureURL	NA
SideBarAnimationOff	NA
SideBarDisplay	NA
SideBarNoSwipeClose	NA
SideBarNotDismissible	NA
SideBarPosFixed	NA
SideBarPosRight	NA
SliderDefaultTrack	NA
SliderDisable	NA
SliderHighlight	NA
SliderMaximum	NA
SliderMini	NA
SliderMinimum	NA
SliderStep	NA
SliderTrackTheme	NA

Desupported Property	Use Instead
Style	NA
SubContainer	NA
SubPage	NA
TableColumnHide	NA
TableColumnPopupTheme	NA
TableColumnTheme	NA
TableColumnToggle	NA
TableResponsive	NA
TableRowClass	NA
TableRowStyle	NA
TableStripe	NA
TextSize	NA
Theme	NA
ThemeDivider	NA
URLAlternativeURL	NA
URLPost	NA
URLSameWindow	NA
URLType	NA

Desupported MapFluid Class Methods

Desupported Method	Use Instead
AddMenuItemToActionMenu	NA
RemoveAction	NA
RenderActionMenuHTML	NA
UpdateSignOutURL	NA

Desupported Messaging PeopleCode Functions, Methods and Properties

In PeopleTools 8.48, messaging changed significantly. Many of the messaging PeopleCode functions, methods and properties are either no longer supported or their syntax changed.

See [Understanding Message Classes](#).

See Integration Broker: PeopleSoft Integration Broker Metadata.

Changed Messaging PeopleCode

The following are still valid, however, their syntax changed significantly.

- CreateMessage built-in function
- IntBroker class, GetMessageErrors method
- IntBroker class, SetMessageError method

Desupported Messaging PeopleCode Built-in Functions

The following table lists the desupported messaging PeopleCode built-in functions, as well as the method that should be used instead.

Desupported Function	Replacement Method
CancelPubHeaderXmlDoc	IntBroker class method Cancel, specifying a message type of %IntBroker_BRK
CancelPubXmlDoc	IntBroker class method Cancel, specifying a message type of %IntBroker_PUB
CancelSubXmlDoc	IntBroker class method Cancel, specifying a message type of %IntBroker_SUB
ConnectorRequest	IntBroker class method ConnectorRequest
ConnectorRequestURL	IntBroker class method ConnectorRequestURL
GetMessage	IntBroker class method GetMessage
GetMessageXmlDoc	Message class method GetXmlDoc
GetPubHeaderXmlDoc	IntBroker class method GetMessage specifying a message type of %IntBroker_BRK
GetPubXmlDoc	IntBroker class method GetMessage specifying a message type of %IntBroker_PUB
GetSubXmlDoc	IntBroker class method GetMessage specifying a message type of %IntBroker_SUB
GetSyncLogData	IntBroker class method GetSyncLogData
InBoundPublishXmlDoc	IntBroker class method InboundPublish
IsMessageActive	IntBroker class method IsOperationActive
PublishXmlDoc	IntBroker class method Publish
ReSubmitPubHeaderXmlDoc	IntBroker class method Resubmit specifying a message type of %IntBroker_BRK
ReSubmitPubXmlDoc	IntBroker class method Resubmit specifying a message type of %IntBroker_PUB
ReSubmitSubXmlDoc	IntBroker class method Resubmit specifying a message type of %IntBroker_SUB
SetChannelStatue	IntBroker class method SetQueueStatus
SyncRequestXmlDoc	IntBroker class method SyncRequest
UpdateXmlDoc	IntBroker class method UpdateXmlDoc

The following built-in functions are no longer supported. You will receive an error if you try to use them in a PeopleCode program.

- CreateWSDLMessage
- GetArchPubHeaderXmlDoc
- GetArchPubXmlDoc
- GetArchSubXmlDoc
- GetArchSubXmlDoc
- GetArchSyncLogData
- GetSyncLogData

Note

ReturnToServer is a special case of a built-in function that's no longer supported. The desupported handler for OnRequest subscriptions cannot be upgraded. ReturnToServer can only be used in an OnRequest event fired using the desupported handler. This means that ReturnToServer no longer works and is not valid in any case other than when the code has already been written and used in a desupported handler.

Desupported Message Class Methods and Properties

The following are the Message class methods and properties that have been desupported.

Desupported Method	Replacement Method
GetQueryString	IBConnectorInfo collection GetQueryStringArgName method
InBoundPublish	IntBroker class InBoundPublish method
Publish	IntBroker class Publish method
SetQueryString	IBConnectorInfo collection AddQueryStringArg method
SetStatus	IntBroker class SetStatus method
SyncRequest	IntBroker class SyncRequest method
Update	IntBroker class Update method

The following are the Message class properties that have been desupported.

Desupported Property	Replacement Property
ChannelName	Message class QueueName property
Cookies	IBConnectorInfo collection Cookies property
DefaultMessageVersion	Message class OperationVersion property
GUID	Message class TransactionId property
IsActive	Message class IsOperationActive property
PubId	Message class QueueSeqId property
SubName	Message class ActionName property
SubscriptionProcessId	Message class TransactionId property
MessageChannel	IBInfo class MessageQueue property
MessageType	IBInfo class OperationType property

The following Message class properties are no longer supported. You will receive an error if you try to use them in your PeopleCode program.

- MessageDetail
- PublicationId

Additional Messaging Desupported Methods and Properties

The following additional methods and properties are no longer supported:

- The IBInfo class method LoadConnectorPropFromTrx is no longer supported.
- The IBInfo class MessageChannel property has been Desupported. Use the IBInfo class MessageQueue property instead.
- The IBInfo class PublicationID property is no longer supported.

Integration Broker Web Service Discovery Class No Longer Supported

The Integration Broker Web Service Discovery class is no longer supported. The following methods are empty and should not be used.

- FindCIWebServices
- FindMsgWebServices
- FindWebServices
- GetCIWebServiceWSDL
- GetMsgWebServiceWSDL
- GetWSDL

Functions No Longer Supported

The following functions no longer work. You will receive an error if you try to use them in your PeopleCode program.

Function	Description
%MessageAgent	Used with Message Agent activities
ChDir	Used only on the client with DOS
ChDrive	Used only on the client with DOS
CheckMenuItem	Used with menu items
Codeb	Used before true Unicode integration
DBCSTrim	Used before true Unicode integration
Findb	Used before true Unicode integration
GetControl	Used with ActiveX controls
GetControlOccurence	Used with ActiveX controls
GetCwd	Used only on the client with DOS
GetMessageInstance	Used with messaging
GetPubContractInstance	Used with messaging
GetSelectedTreeNode	Used with dynamic trees
GetSubContractInstance	Used with messaging
GetTreeNodeParent	Used with dynamic trees
GetTreeNodeRecordName	Used with dynamic trees
IsDisconnectedClient	Used with PeopleSoft Mobile Agent.
MSFGetNextNumber	Used with PeopleSoft Mobile Agent.
Lenb	Used before true Unicode integration
RefreshTree	Used with dynamic trees
ScheduleProcess	Used with PeopleSoft Process Scheduler
Substringb	Used before true Unicode integration

Function	Description
UnCheckMenuItem	Used with menu items
WinEscape	Used only on client
WinExec	Used only on client

Desupported Built-in Functions from Prior to PeopleTools 8.0

The first column in the following table lists built-in PeopleCode functions that existed prior to PeopleTools 8.0. The second column lists the new method or property that should be used instead of the desupported function. The existing functions still work in PeopleTools 8.0, however, they are being retained for backward compatibility only. New applications should be created using the new classes, methods, and properties.

Desupported Function	Use Instead
ActiveRowCount	Rowset class, ActiveRowCount property
ClearSearchDefault	Field class, SearchDefault property
ClearSearchEdit	Field class, SearchEdit property
CompareLikeFields	Record class, CompareFields method
CopyFields	Record class, CopyFieldsTo method or CopyChangedFieldsTo method
CopyRow	Row class, CopyTo method
CurrEffDt	Rowset class, DeleteEnabled property
CurrEffRowNum	Row class, RowNumber property in combination with Rowset class, GetCurrEffRow method
CurrEffSeq	Rowset class, EffSeq property
CurrentRowNumber	Row class, RowNumber property
DeleteRecord	Record class, Delete method
DeleteRow	Rowset class, DeleteRow method
FetchValue	Field class, Value property
FieldChanged	Field class, IsChanged property
GetRelField	Field class, GetRelated method
GetStoredFormat	Field class, StoredFormat property
Gray	Field class, Enabled property
Hide	Field class, Visible property
HideRow	Row class, Visible property
HideScroll	Rowset class, HideAllRows method
InsertRow	Rowset class, InsertRow method
IsHidden	Row class, Visible property
NextEffDt	GetNextEffRow().REC.FIELD.Value
NextRelEffDt	GetNextEffRow(). ()REC.FIELD.GetRelated(rec.field).value
PriorEffDt	GetPriorEffRow().REC.Field.Value

Desupported Function	Use Instead
PriorRelEffDt	GetPriorEffRow().REC.FIELD.GetRelated(rec.fiel d).value
RecordChanged	Record class, IsChanged property
RecordDeleted	Record class, IsDeleted property
RecordNew	Row class, IsNew property
RemoteCall for Application Engine	CallAppEngine function
RowFlush	Rowset class, FlushRow method
RowScrollSelect	Rowset class, Select method
RowScrollSelectNew	Rowset class, SelectNew method
ScrollFlush	Rowset class, Flush method
ScrollSelect	Rowset class, Select method
ScrollSelectNew	Rowset class, SelectNew method
SetDefault	Field class, SearchDefault property
SetDefaultAll	Rowset class, SetDefault method
SetDefaultNext	GetNextEffRow().REC.FIELD.SetDefault()
SetDefaultNextRel	GetNextEffRow().REC.Field.GetRelated(REC.FIE LD).SetDefault()
SetDefaultPrior	GetPriorEffRow().REC.FIELD.SetDefault()
SetDefaultPriorRel	GetPriorEffRow().REC.Field.GetRelated(REC.FIE LD).SetDefault()
SetDisplayFormat	Field class, DisplayFormat property
SetLabel	Field class, Label property
SetSearchDefault	Field class SearchDefault property
SetSearchEdit	Field class, SearchEdit property
SetTracePC	If using API (Session object), use Trace Setting class properties.
SetTraceSQL	If using API (Session object), use Trace Setting class properties.
SortScroll	Rowset class, Sort method
TotalRowCount	Rowset class, RowCount property
Ungray	Field class, Enabled property
UnHide	Field class, Visible property
UnHideRow	Row class, Visible property
UnhideScroll	Rowset class, ShowAllRows method
UpdateValue	Field class, Value property

Mapping PeopleTools 8.1 Objects to New Objects

In PeopleTools 8.1, the names of some of the object definitions in Application Designer changed. The names of related built-in functions have changed accordingly.

The first table lists the old terms and new terms.

In the second table, the left column lists the old names of the functions, system variables, or reserved words. The right column lists the new names. The old functions, system variables, and reserved words in this table still work in PeopleTools; however, they have been desupported and are being retained for backward compatibility only. New applications should be created using the new functions, system variables, and reserved words.

Old Term	New Term
Operator	User
Panel	Page
Panel Group	Component
Business Component	Component Interface

Desupported Function, System Variable or Reserved Word	New Function, System Variable or Reserved Word
DoModalPanelGroup built-in function	DoModalComponent built-in function
GetNextNumberWithGaps	GetNextNumberWithGapsCommit built-in function
IsModalPanelGroup built-in function	IsModalComponent built-in function
IsOperatorInClass built-in function	IsUserInPermissionList built-in function
PanelGroupChanged built-in function	ComponentChanged built-in function
ScheduleProcess built-in function	CreateProcessRequest built-in function
SetNextPanel built-in function	SetNextPage built-in function
TransferPanel built-in function	TransferPage built-in function
%OperatorClass System Variable	%PrimaryPermissionList System Variable
%OperatorID System Variable	%UserId System Variable
%OperatorRowLevelSecurityClass System Variable	%RowSecurityPermissionList System Variable
%Panel System Variable	%Page System Variable
%PanelGroup System Variable	%Component System Variable
PANEL reserved word	PAGE reserved word
PANELGROUP reserved word	COMPONENT reserved word
PanelGroup variable declaration	Component variable declaration

Business Components are now named Component Interfaces. Therefore, for Component Interfaces, the old reserved word, methods, and system variables *are no longer valid*. You *must* use the new reserved word, methods, or system variables.

No Longer Valid	Use Instead
COMPONENT reserved word	COMPINTFC reserved word
GetComponent method	GetCompIntfc method
FindComponent method	FindCompIntfcs method
%Component system variable	%CompIntfc system variable