

Oracle® Cloud

What's New for Oracle Integration 3



F98385-99
September 2026



Oracle Cloud What's New for Oracle Integration 3,

F98385-99

Copyright © 2022, 2026, Oracle and/or its affiliates.

Primary Author: Oracle Corporation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Contents

About This Content

1 What's Covered in This Guide?

2 End of Life Announcements

Oracle Integration Generation 2 End of Life	1
Oracle Cloud Infrastructure Process Automation and Oracle Process Automation for Fusion Applications End of Life	1

3 New Features for 2026

September 2026 (26.10)	1
Common Features	1
Agentic AI Features	2
Integration and Connectivity Features	2
Robotic Process Automation Features	8
B2B for Oracle Integration	8
File Server Features	8
Process Automation Features	8
September 2026 (26.07.2)	9
Common Features	9
July 2026 (26.07)	9
Common Features	9
Agentic AI Features	10
Integration and Connectivity Features	11
Robotic Process Automation Features	15
Oracle Integration for Healthcare Features	15
B2B for Oracle Integration Features	15
File Server Features	16
Process Automation Features	16
June 2026 (26.04.2)	17
Common Features	17

April 2026 (26.04)	17
Common Features	17
Agentic AI Features	18
Integration and Connectivity Features	19
Robotic Process Automation (RPA) Features	24
Oracle Integration for Healthcare Features	24
B2B for Oracle Integration Features	25
File Server Features	25
March 2026 (26.01.2)	26
January 2026 (26.01)	26
Common Features	26
Agentic AI Features	28
Integration and Connectivity Features	28
Robotic Process Automation (RPA) Features	31
Oracle Integration for Healthcare Features	32
B2B for Oracle Integration Features	32
Decisions Features	33
File Server Features	33
Process Automation Features	33
Visual Builder Features	35

4 New Features for 2025

New Experience in Oracle Cloud Console	1
September 2025 (25.10)	2
Common Features	2
Agentic AI Features	3
Integration and Connectivity Features	3
Robotic Process Automation (RPA) Features	9
Oracle Integration for Healthcare Features	11
B2B for Oracle Integration Features	12
Process Automation Features	13
Decisions Features	13
Rapid Adapter Builder Features	14
File Server Features	14
Visual Builder Features	14
June 2025 (25.06)	22
Common Features	22
Integration and Connectivity Features	24
Robotic Process Automation (RPA) Features	27
Oracle Integration for Healthcare Features	28
B2B for Oracle Integration Features	29

File Server Features	31
Visual Builder Features	31
April 2025 (25.04)	31
Common Features	31
Integration and Connectivity Features	33
Robotic Process Automation (RPA) Features	37
Oracle Integration for Healthcare Features	39
B2B for Oracle Integration Features	40
File Server Features	41
Decisions Features	42
February 2025 (25.02)	42
Common Features	42
Integration and Connectivity Features	43
Oracle Integration for Healthcare Features	50
B2B for Oracle Integration Features	50
File Server Features	51

5 New Features for 2024

October 2024 (24.10)	1
Common Features	1
Integration and Connectivity Features	3
Oracle Integration for Healthcare Features	7
B2B for Oracle Integration Features	8
File Server Features	8
August 2024 (24.08)	9
Common Features	9
Integration and Connectivity Features	10
Oracle Integration for Healthcare Features	15
B2B for Oracle Integration Features	15
File Server Features	16
Process Features	16
Visual Builder Features	16
June 2024 (24.06)	20
Common Features	20
Integration and Connectivity Features	22
B2B for Oracle Integration Features	26
File Server Features	27
April 2024 (24.04)	28
Common Features	28
Integration and Connectivity Features	29
B2B for Oracle Integration Features	33

File Server Features	36
February 2024 (24.02)	37
Common Features	37
Integration and Connectivity Features	38
B2B for Oracle Integration Features	45
Visual Builder Features	46

6 New Features for 2023

December 2023 (23.12)	1
Common Features	1
Integration and Connectivity Features	2
B2B for Oracle Integration Features	5
October 2023 (23.10)	5
Common Features	5
Integration and Connectivity Features	6
B2B for Oracle Integration Features	11
File Server Features	11
August 2023	12
Common Features	12
Integration and Connectivity Features	13
File Server Features	19
Visual Builder Features	19
July 2023	25
Common Features	25
June 2023	26
Common Features	26
Integration and Connectivity Features	26
B2B for Oracle Integration Features	31
May 2023	32
Common Features	32
B2B for Oracle Integration Features	33
Oracle Cloud Infrastructure Process Automation Features	33
Insight Features	34
April 2023	34
Common Features	34
Integration and Connectivity Features	36
File Server Features	39
B2B for Oracle Integration Features	40
March 2023	40
Common Features	40
Visual Builder Features	42

February 2023	43
Common Features	43
Integration and Connectivity Features	44
File Server Features	47
B2B for Oracle Integration Features	47
Visual Builder Features	48
January 2023	49
Common Features	49

7 New Features for 2022

December 2022	1
Common Features	1
Integration and Connectivity Features	2
November 2022	5
Common Features	5
Integration and Connectivity Features	6
File Server Features	9
October 2022	9
Common Features	9
September 2022	10
Common Features	10
Integration and Connectivity Features	10
August 2022	11
Common Features	11
Integration and Connectivity Features	13

8 Supported Browsers

9 Verify Updates and Feature Availability

Check Whether Your Instance Has Been Updated	1
Confirm that a Feature Is Available in Your Realm	2
Confirm that a Feature Is Available in Your Region	3

10 Differences from Prior Versions of Oracle Integration

About This Content

This guide describes the new and changed features for Oracle Integration 3.

Audience

This guide is intended for users who want to learn about the new features in Oracle Integration 3.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Resources

See these Oracle resources:

- Oracle Integration documentation on the Oracle Help Center.
- Oracle Cloud at <http://cloud.oracle.com>

Conventions

The following text conventions are used in this document.

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

1

What's Covered in This Guide?

Learn about the new and changed features of Oracle Integration 3, which is the latest generation of Oracle Integration.

In This Guide

- [Oracle Integration Generation 2 End of Life](#)
- [New Features for 2026](#)
- [New Features for 2025](#)
- [New Features for 2024](#)
- [New Features for 2023](#)
- [New Features for 2022](#)
- [Verify Updates and Feature Availability](#)
- [Differences from Prior Versions of Oracle Integration](#)

Not Covered in This Guide

- **Oracle Integration Generation 2 changes and differences**
New and changed features for the prior generation, Oracle Integration Generation 2.
- **REST API changes**
Learn about new and changed endpoints for the Developer API for Oracle Integration 3. See [Developer API for Oracle Integration 3](#).
- **Historical Process Automation changes**
New and changed features in Process Automation prior to the 25.10 release are in *What's New for Oracle Cloud Infrastructure Process Automation*.

2

End of Life Announcements

Several services are reaching end of life in the coming months.

Topics:

- [Oracle Integration Generation 2 End of Life](#)
- [Oracle Cloud Infrastructure Process Automation and Oracle Process Automation for Fusion Applications End of Life](#)

Oracle Integration Generation 2 End of Life

Oracle Integration Generation 2 was discontinued on August 31, 2025 and the Generation 2 documentation library will be significantly reduced on March 20, 2026 to include only a select number of Process-related guides for customers following the phased upgrade for Process.

You must upgrade from Oracle Integration Generation 2 to our next generation of the Oracle Integration platform, Oracle Integration 3. The upgrade to Oracle Integration 3 delivers a fully managed, preconfigured business automation environment with improved performance. If you have any questions, file a service request.

See [Upgrade from Oracle Integration Generation 2 to Oracle Integration 3](#) in *Provisioning and Administering Oracle Integration 3*.

Oracle Cloud Infrastructure Process Automation and Oracle Process Automation for Fusion Applications End of Life

Some changes have already taken effect, and others are coming soon for Oracle Cloud Infrastructure Process Automation and Oracle Process Automation for Fusion Applications.

Affected Instances

- **Oracle Cloud Infrastructure Process Automation**
 - As of April 3, 2026, Oracle Cloud Infrastructure Process Automation is no longer available as a service.
 - Any customers working in Oracle Cloud Infrastructure Process Automation can migrate to Oracle Integration.

For details, see the [Oracle Cloud Infrastructure Process Automation – End of Life blog](#) and Phased Upgrade for Process in *Provisioning and Administering Oracle Integration 3*.
- **Oracle Process Automation for Fusion Applications**

After October 31, 2026, Oracle Process Automation for Fusion Applications will be discontinued as a service.

Not Affected: Attached Instances

The end of life does NOT affect Oracle Cloud Infrastructure Process Automation services instances that are *attached* to Oracle Integration 3. A Process Automation service instance becomes attached to Oracle Integration 3 when you perform any of the following tasks:

- Enable Process Automation from within Oracle Integration 3.
See Use Process Automation in Oracle Integration.
- Use explicit attachment to attach an existing Oracle Cloud Infrastructure Process Automation service instance to an Oracle Integration 3 service instance. You must enter a service request for this option.

See the [Oracle Cloud Infrastructure Process Automation – End of Life blog](#).

3

New Features for 2026

Review the new features for 2026.

Topics:

- [September 2026 \(26.10\)](#)
- [September 2026 \(26.07.2\)](#)
- [July 2026 \(26.07\)](#)
- [June 2026 \(26.04.2\)](#)
- [April 2026 \(26.04\)](#)
- [March 2026 \(26.01.2\)](#)
- [January 2026 \(26.01\)](#)

September 2026 (26.10)

Common Features

Feature	Description	Minimum Version
Additional storage for File Server	If you need more than 500 GB of File Server storage capacity, you can purchase the additional storage for an additional charge. See Additional Message Consumption for Optional Features in <i>Provisioning and Administering Oracle Integration 3</i> .	26.10
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Bulk Import Accounts from Salesforce to Netezza Database • Create Care Requests in Oracle Fusion Cloud Sales from Oracle Health EHR • Leverage RPA to Automate Group Creation and User Assignment in Oracle ERP Cloud	26.10
Certificate responsibilities for private or restricted client trust stores	If you maintain private or restricted client trust stores, ensure that the required root certificate authority (CA) certificates are installed and updated as needed when they are refreshed or expire. See Oracle and Customer Responsibilities in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A

Agentic AI Features

Feature	Description	Minimum Version
MCP Gateway	We are excited to announce the release of the Oracle Integration MCP Gateway. The Oracle Integration MCP Gateway provides a governed path for MCP clients to access Oracle Integration and approved third-party MCP servers with centralized identity, policy, credential, enforcement, and observability controls. See <i>Secure and Manage MCP Servers with MCP Gateway</i> in <i>Using Agentic AI in Oracle Integration 3</i> and Introducing Oracle Integration MCP Gateway: Governed Access for Enterprise AI Agents.	26.10
Knowledge Base - Custom metadata support	You can define custom metadata fields for more precise document searches and filtering in a knowledge base. Metadata fields can include text, numeric, boolean, and date values. See <i>Add Custom Metadata to a Knowledge Base</i> in <i>Using Agentic AI in Oracle Integration 3</i>.	26.10
Human in the loop	- Assign tasks directly to users and groups You can now assign tasks directly to one or more users or groups by selecting them in the Assignee field. This simplifies task configuration when assignees are known at design time, while expression-based assignment remains available for dynamically determining assignees. See <i>Configure Tasks</i> in <i>Using Human in the Loop in Oracle Integration 3</i>. - Set task priority You can now use an expression to set the priority of a task dynamically. Tasks default to priority 2 (normal); lower numbers indicate higher priority, with 1 as the highest priority. See <i>Configure Tasks</i> in <i>Using Human in the Loop in Oracle Integration 3</i>. - Use business key to group workflow instances You can now specify a business key to group related workflow instances at runtime. See <i>Edit Workflow Information</i> in <i>Using Human in the Loop in Oracle Integration 3</i>.	26.10

Integration and Connectivity Features

Feature	Description	Minimum Version
Move an integration to a project and retain the same global endpoint URL	You can move integrations from a standalone environment to a project while retaining the global endpoint URL. This capability enables your existing Oracle Integration clients to continue to use the global endpoint URL they are currently invoking. See <i>Add Standalone Integrations to a Project</i> in <i>Using Integrations in Oracle Integration 3</i>.	26.10
Use AI for monitoring and analysis	Use AI-powered assistance to analyze runtime behavior and query operational data. This feature is available only in the following regions: - US West (Phoenix) - PHX - US East (Ashburn) - IAD - UK South (London) - LHR See <i>Use AI to Analyze Runtime Behavior and Query Operational Data</i> in <i>Using Integrations in Oracle Integration 3</i>.	26.10

Feature	Description	Minimum Version
Support for new adapters when automatically configuring trigger/invoke using AI	When creating an integration using AI, automatic configuration of trigger/invoke is now supported for Shopify GraphQL Adapter and Oracle Fusion Field Service Adapter. See Use AI to Create an Integration in <i>Using Integrations in Oracle Integration 3</i> .	26.10
Generate, embed, or rerank text with an Oracle Cloud Infrastructure Generative AI action	The Oracle Cloud Infrastructure Generative AI action now supports Gemini model in the On demand category for the Chat action. See Generate, Embed, or Rerank Text with a Generative AI Action in <i>Using Integrations in Oracle Integration 3</i> .	26.10
OCI Generative AI and OCI Vision actions are available in government regions	You can use the OCI Generative AI and OCI Vision actions in government regions. See Generate, Embed, or Rerank Text with a Generative AI Action and Analyze and Extract Information from Images with a Vision Action in <i>Using Integrations in Oracle Integration 3</i> .	26.10
OCI Cache Adapter - Standalone instance versus project level cache data isolation	You can isolate access to cache data by selecting how specific a key prefix must be before a user is allowed to access it. See Configure Connection Properties in <i>Using the OCI Cache Adapter with Oracle Integration 3</i> .	26.10
MongoDB Adapter - New adapter	The MongoDB Adapter provides native connectivity to MongoDB Atlas, enabling Oracle Integration to integrate document data with enterprise applications and business processes without custom code. The MongoDB Adapter supports both inbound and outbound integration patterns: - Document polling (trigger): Polls MongoDB collections based on configured criteria, with support for logical delete field-based polling, batch size, and polling frequency. - Document operations (invoke): Supports insert, update, merge, search, and delete operations, including filters and pagination. Merge operations can update matching documents or insert new documents when no match is found. - Flexible data formats: Supports both MongoDB extended JSON and normal JSON payloads. - Connectivity and security: Supports public internet, private endpoint, and connectivity agent-based connectivity, with user name and password authentication. The MongoDB Adapter enables you to integrate MongoDB with Oracle Integration. You can configure the MongoDB Adapter as a trigger or an invoke connection in an integration in Oracle Integration. MongoDB is a NoSQL document database. Data is stored as flexible JSON-like documents in collections rather than as rows and columns in tables. See MongoDB Adapter Capabilities in <i>Using the MongoDB Adapter with Oracle Integration 3</i> .	26.10
Advanced Message Queuing Protocol Adapter - New adapter	The Advanced Message Queuing Protocol Adapter enables integrations to exchange messages with AMQP 1.0 brokers, including Qpid, SwiftMQ, and Solace, using queue- and topic-based messaging. You can configure the Advanced Message Queuing Protocol Adapter as a trigger or invoke connection to publish messages, consume messages synchronously, or receive messages through inbound polling. The Advanced Message Queuing Protocol Adapter also supports durable topic subscriptions for continuous and on-demand messaging scenarios. See Advanced Message Queuing Protocol Adapter Capabilities in <i>Using the Advanced Message Queuing Protocol Adapter with Oracle Integration 3</i> .	26.10

Feature	Description	Minimum Version
Rapid Adapter Builder - User identity propagation support	The Rapid Adapter Builder supports user identity propagation with OAuth using the JWT User Assertion security policy. User identity propagation enables an integration to obtain an OAuth access token and invoke a downstream service on behalf of a user. The user's identity is preserved across services, enabling the downstream application to enforce user-specific permissions and maintain user-level audit records, rather than treating every request as coming from a shared integration account. See OAuth JWT User Assertion in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i>.	26.10
Salesforce Adapter - Username Password security policy removal	Username Password security policy is no longer available for new connections in the Salesforce Adapter. Migrate to OAuth-based authentication using external client apps to ensure uninterrupted connectivity. See Configure Connection Security and Migrate to OAuth Flows in <i>Using the Salesforce Adapter with Oracle Integration 3</i>.	26.10
OpenAI Adapter - File content and OpenAI-compatible endpoints across domains support	The OpenAI Adapter supports OpenAI-compatible endpoints across domains, such as AWS Bedrock, along with inline document support. Base 64-encoded file content is also supported for the Chat Completion and Response operations. See OpenAI Adapter Capabilities in <i>Using the OpenAI Adapter with Oracle Integration</i>.	26.10
Slack Adapter - File upload API had been deprecated/retired	The Slack Adapter supports Slack's latest file-upload mechanism with updated APIs. The Create File operation uploads and creates one or more files in Slack. See Invoke Operations Page in <i>Using the Slack Adapter with Oracle Integration 3</i>.	26.10

Feature	Description	Minimum Version
Private endpoint support for more adapters	You can configure the following adapters to connect to endpoints using a private virtual cloud network (VCN). • ActiveMQ Adapter • Advanced Message Queuing Protocol Adapter • ArcGIS (ESRI) Adapter • Amazon Simple Storage Service (S3) Adapter • Amazon Simple Queue Service (SQS) Adapter • Amazon Simple Notification Service (SNS) Adapter • Asana Adapter • Azure Event Grid Adapter • Azure Service Bus Adapter • Azure Storage Adapter • BigQuery Adapter • Coupa Procurement Adapter • Coupa Sourcing Adapter • GCP Pub Sub Adapter • GCP Storage Adapter • GitHub Adapter • Microsoft Entra ID Adapter • Microsoft SharePoint Adapter • Microsoft SQL Server Adapter • MongoDB Adapter • Oracle AI Database Adapter • Oracle NetSuite REST Adapter • PostgreSQL Adapter • Salesforce Marketing Cloud Adapter • Snowflake Adapter • Zuora Adapter See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i>.	26.10
REST Adapter - Resource Principal Signature Trust (RPST) support	Inbound trigger connection requests are secured from supported Oracle Cloud Infrastructure services by using Oracle Cloud Infrastructure principal signed requests and Oracle Cloud Infrastructure Identity and Access Management authorization. See Capabilities When Configuring a Trigger Connection to Expose an Integration as a REST API and Invoke REST Adapter Trigger-Based Integrations with Oracle Cloud Infrastructure Principal Signed Requests in <i>Using the REST Adapter with Oracle Integration 3</i>.	26.10
SOAP Adapter - JWT Assertion support for invoke connections	The SOAP Adapter strengthens invoke connection security with the following security policies: • JWT User Assertion • JWT Client Assertion policies through JWT User Assertion (including user identity propagation through JWT User Assertion) See SOAP Adapter Capabilities and Invoke a Web Service with a JWT Assertion in <i>Using the SOAP Adapter with Oracle Integration 3</i>.	26.10
Oracle HCM Cloud Adapter - Atom feed update	The Oracle HCM Cloud Adapter supports the EmployeePayrollUpdate Atom feed. EmployeePayrollUpdate notifies downstream integrations when an employee's assigned payroll details change. See Invoke Operation Page in <i>Using the Oracle HCM Cloud Adapter with Oracle Integration 3</i>.	26.10

Feature	Description	Minimum Version
Oracle NetSuite REST Adapter - Trigger and security policy support	The Oracle NetSuite REST Adapter provides inbound trigger support and HMAC Signature Validation security policy support. Private endpoint connectivity is also supported. See Oracle NetSuite REST Adapter Capabilities and Configure Connection Security in <i>Using the Oracle NetSuite REST Adapter with Oracle Integration 3</i> .	26.10
Microsoft SharePoint Adapter - Configuration support for commercial customers, US government, or sovereign cloud environments	The Microsoft SharePoint Adapter expands connectivity and business-process support with Microsoft commercial, U.S. Government, and other sovereign cloud environments through configurable Microsoft Graph and authentication endpoints. This release also introduces Graph API Base URL and OAuth Authority Host fields on the Connections page, enabling you to configure the Microsoft Graph API and OAuth authentication hosts appropriate for your Microsoft 365 environment. See Microsoft SharePoint Adapter Capabilities in <i>Using the Microsoft SharePoint Adapter with Oracle Integration 3</i> .	26.10
Confluent Adapter - SASL OAUTH (client credentials) support -	The Confluent Adapter supports the SASL OAUTH (client credentials) security policy. This policy provides OAuth-based authentication to Confluent messaging systems. See Configure Connection Security in <i>Using the Confluent Adapter with Oracle Integration 3</i> .	26.10
Amazon Simple Storage Service (S3) Adapter - Using ARN / STS-based SigV4 Authentication security policies	The Amazon Simple Storage Service (S3) Adapter supports the STS-based SigV4 Authentication security policy. See Amazon Simple Storage Service (S3) Adapter Capabilities in <i>Using the Amazon Simple Storage Service (S3) Adapter with Oracle Integration 3</i> .	26.10
Databricks Adapter - Public internet support	The Databricks Adapter supports integration with publicly accessible resources (direct connectivity over the public internet). See Databricks Adapter Capabilities in <i>Using the Databricks Adapter with Oracle Integration 3</i> .	26.10
FTP Adapter - Schema-based inbound polling size increase	The FTP Adapter supports files up to 100 MB in size for schema-based inbound polling and up to 1 GB for nonschema-based inbound polling using the connectivity agent. See FTP Adapter Restrictions in <i>Using the FTP Adapter with Oracle Integration 3</i> .	26.10
Dynamic invoke connection support in Oracle Autonomous AI Transaction Processing (ATP) Adapter and Oracle AI Database Adapter	You can dynamically update the Oracle Autonomous AI Transaction Processing (ATP) Adapter or Oracle AI Database Adapter invoke connection to use at runtime. This feature lets you use a single integration to send requests to multiple endpoints of the same application and eliminates the need to create a separate integration for each endpoint or multiple invoke connections configured in a switch action in a single integration. See Invoke Dynamic Connections Page and Dynamically Update Invoke Connections at Runtime in <i>Using the Oracle AI Database Adapter with Oracle Integration 3</i> and Invoke Dynamic Connections Page and Dynamically Update Invoke Connections at Runtime in <i>Using the Oracle Autonomous AI Transaction Processing (ATP) Adapter with Oracle Integration 3</i> .	26.10
Oracle Autonomous AI Transaction Processing (ATP) Adapter - Hybrid index operation enhancements	Hybrid index operations have been expanded with configurable ingestion parameters and scalable handling of large hybrid index search responses. See Invoke Hybrid Index Operations Page in <i>Oracle Autonomous AI Transaction Processing (ATP) Adapter with Oracle Integration 3</i> .	26.10

Feature	Description	Minimum Version
Adobe Sign Adapter - Inbound operation support	The Adobe Sign Adapter supports inbound operations for event-driven integrations. See <i>Adobe Sign Adapter Capabilities and Trigger Configuration Page in Using the Adobe Sign Adapter with Oracle Integration 3</i> .	26.10
ActiveMQ Adapter - Two-way SSL support	The ActiveMQ Adapter supports the Basic Auth Mutual TLS security policy. This policy combines user name/password authentication with mutual TLS certificates. See <i>ActiveMQ Adapter Capabilities in Using the ActiveMQ Adapter with Oracle Integration 3</i> .	26.10
SAP SuccessFactors Adapter - Support OpenID Security policy and SAML Policy Implementation	The SAP SuccessFactors Adapter supports the SAML with SAP Identity Authentication Service and SAP OPENID Connect security policies. See <i>SAP SuccessFactors Adapter Capabilities in Using the SAP SuccessFactors Adapter with Oracle Integration 3</i> .	26.10
Shopify GraphQL Adapter - Connectivity and business-process support enhancements	The Shopify GraphQL Adapter expands connectivity and business-process support with cloud endpoint, private connectivity, and fulfillment-order enhancements. See <i>Shopify GraphQL Capabilities in Using the Shopify GraphQL Adapter with Oracle Integration 3</i> .	26.10
SAP Ariba Adapter - cXML message processing support	For the SAP Business Network integration, the SAP Ariba Adapter supports cXML Standard Purchase order flows between buyers and suppliers by using cXML Shared Secret authentication. This capability simplifies cXML-specific authentication for buyer and supplier purchase order flows. See <i>SAP Ariba Adapter Capabilities and Configure Connection Security in Using the SAP Ariba Adapter with Oracle Integration 3</i> .	26.10
SAP Concur Adapter - Swagger API v4.0 configuration support while preserving existing activated integrations	The SAP Concur Adapter supports the new Swagger API v4.0 configuration while preserving existing activated integrations. See <i>SAP Concur Adapter Capabilities and SAP Concur Adapter Restrictions in Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i> .	26.10
Microsoft Dynamics 365 CRM Adapter - PKCE support	The Microsoft Dynamics 365 CRM Adapter supports the Authorization Code Credentials (PKCE) security policy for stronger authorization-code authentication. See <i>Configure Connection Security in Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i> .	26.10
Salesforce REST Adapter - PKCE support for three-legged flow	The Salesforce REST Adapter supports the Authorization Code Credentials (PKCE) security policy for authorization-code authentication. See <i>Salesforce REST Adapter Capabilities in Using the REST Adapter with Oracle Integration 3</i> .	26.10
Attention! Download the latest mTLS wallets for some adapters	DigiCert has announced that it will stop trusting G1 root certificates, effective April 15, 2026. This change impacts customers using Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Advanced Queuing (AQ) Adapter, Oracle Advanced Queuing (AQ) JMS Adapter, Oracle AI Database Adapter, and Oracle Database Cloud Service Adapter connections configured with wallet-based mutual TLS (mTLS) authentication. You must download the latest mTLS wallets. See Action Required: Re-download mTLS Wallets with DigiCert G2 Certificates .	N/A

Robotic Process Automation Features

Feature	Description	Minimum Version
New action: Searchable List	A new action is available to automate the multiple actions required for a dynamic drop-down list using a single action. See Add a Searchable List Action in <i>Using Robots in Oracle Integration 3</i> .	26.10

B2B for Oracle Integration

Feature	Description	Minimum Version
Validate B2B identifiers in inbound agreements	You can validate B2B identifiers in inbound agreements to verify that the identifier values in inbound EDI messages match the B2B identifiers configured for the trading partner and host profile. See Create Agreements in <i>Using B2B for Oracle Integration 3</i> .	26.10
Enable conditional loop parsing for X12 HIPAA schemas	You can now enable conditional loop parsing for X12 HIPAA schemas of document type 837 or 238. Specify an element in the first segment of a loop and one or more values to define the loop parsing criteria. The parser matches the loop only when the specified element contains one of the configured values. See Enable Conditional Loop Parsing for an X12 HIPAA Schema (837 or 238) in <i>Using B2B for Oracle Integration 3</i> .	26.10

File Server Features

Feature	Description	Minimum Version
Enhanced File Server security with additional cipher suites.	With 26.10, File Server supports the aes128-gcm@openssh.com and aes256-gcm@openssh.com ciphers. See Configure File Server Settings in <i>Using File Server in Oracle Integration 3</i> .	26.10
Purchase additional storage	Each File Server service instance provides 500 GB of default storage at no additional cost. If you reach this limit, any calls to write files to File Server fail. If you need more than 500 GB of File Server storage capacity, you can purchase the additional storage for an additional charge. See What is the Default Storage Limit and How Can I Add More Storage? in <i>Using File Server in Oracle Integration 3</i> .	26.10

Process Automation Features

Starting from 26.04 release, you can view the known issues for Process Automation at Process Automation Issues in *Known Issues for Oracle Cloud Infrastructure Process Automation*.

Feature	Description	Minimum Version
Oracle Assistant removed	As of release 26.10, Oracle Assistant, which is a digital assistant, is no longer available in Oracle Cloud Infrastructure Process Automation.	26.10

September 2026 (26.07.2)

Common Features

Feature	Description	Minimum Version
Fusion Agent AI Studio Adapter - New Adapter	Fusion Agent AI Studio Adapter is Oracle's low-code/no-code platform for creating, extending, testing, deploying, and managing AI agents and multiagent workflows directly within Oracle Fusion Cloud Applications. It allows customers and partners to customize Oracle-delivered agents or build new ones that securely access Oracle Fusion Cloud Applications business data, transactions, APIs, and workflows. See Fusion Agent AI Studio Adapter Capabilities in <i>Using the Fusion Agent AI Studio Adapter with Oracle Integration 3</i> .	26.07.2
Retirement of Oracle Assistant	The Oracle Assistant has been removed from the Oracle Integration user interface.	26.07.2

July 2026 (26.07)

Common Features

Feature	Description	Minimum Version
Asynchronous message queue depth	Service limits are provided for the asynchronous message queue depth available with the specific message pack assigned to your Oracle Integration instance. See Component: Integrations in <i>Provisioning and Administering Oracle Integration 3</i> .	26.07
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. - Extract Approved Expense Reports from SAP Concur and Write to an FTP Server - Sync New Cases from Microsoft Dynamics 365 to ServiceNow - Create AI Assisted Clinical Care Plans	26.07

Feature	Description	Minimum Version
Troubleshooting and FAQ enhancements	Need assistance with setting up OAuth grant types or troubleshooting SSL connection issues or Oracle ERP Cloud service catalog or event errors? We've enhanced our troubleshooting documentation to assist you! - Visually learn how to set up the client credentials, authorization code, and JWT user assertion OAuth grant types and use the grant type details to call the REST APIs. See Visually Learn How to Set Up OAuth Grant Types and Call the REST APIs in <i>Using the REST Adapter with Oracle Integration 3</i>. - Troubleshoot Oracle ERP Cloud Adapter service catalog errors. See Error When Discovering REST Services or SOAP Services through the Oracle ERP Cloud Adapter in <i>Using the Oracle ERP Cloud Adapter with Oracle Integration 3</i>. - Troubleshoot not receiving Oracle ERP Cloud events. See Events Not Received by Oracle Integration When Using Oracle ERP Cloud Adapter Trigger Connections in <i>Using the Oracle ERP Cloud Adapter with Oracle Integration 3</i>. - Troubleshoot REST Adapter exception errors when using the Authorization Code grant type. See OAuth Returns a "The token has already been consumed" Error in <i>Using the REST Adapter with Oracle Integration 3</i>. - Troubleshoot SSL connection issues. See Troubleshoot SSL Issues in <i>Using the REST Adapter with Oracle Integration 3</i> and Troubleshoot SSL Issues in <i>Using the SOAP Adapter with Oracle Integration 3</i>. Additionally, we've added new billing FAQs to help answer common questions and make it easier to find the information you need. See FAQs for Billing in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A
UI text clarification	On the Oracle Cloud Console instance details page, the UI text has been updated to clarify that the Process Automation setting also enables human in the loop. See Use Process Automation and Human in the Loop in Oracle Integration.	N/A

Agentic AI Features

Feature	Description	Minimum Version
Knowledge Base	New features for knowledge base: - Add a knowledge base within a project without creating a new project. See Add a Knowledge Base. - Drag and drop documents into the knowledge base. See Drag and Drop Documents into the Knowledge Base. - Support for Oracle Cloud Infrastructure Generative AI Cohere Embed models. See Use OCI Generative AI Cohere Embed Models. - Support for public gateways with knowledge base.	26.07
AI Agents	New operations for the AI agent action: - Get AI Agent activity stream. See Get the Activity Stream for an AI Agent. - Callback AI agent: asynchronous agentic AI tools can now implement a callback to an AI agent to send a response. See Send a Response to an AI Agent with a Callback.	26.07
Agentic AI patterns	- Agentic AI patterns now support the Oracle Cloud Infrastructure Generative AI Google Gemini models. See Supported Large Language Models - In the 26.07 release, you can still continue to use agentic AI patterns that have version 26.04 for your AI agents. However, you cannot use agentic AI patterns with version 26.04 and 26.07 in the same project.	26.07

Feature	Description	Minimum Version
Human in the loop	- Notification support for tasks Keep task assignees informed by sending notifications when tasks are assigned and follow-up reminders if tasks remain incomplete. See Configure Task Notifications in <i>Using Human in the Loop in Oracle Integration 3</i>. - New workflow approval patterns You can now design workflows with different approval patterns, such as tiered and parallel approvals, based on how human reviewers need to participate. See Model Approval Patterns in <i>Using Human in the Loop in Oracle Integration 3</i>. Create these approval patterns in seconds with ready-made recipes that include all required assets preconfigured. Simply select a recipe as an agentic AI tool to build your approval workflow.	26.07

Integration and Connectivity Features

Feature	Description	Minimum Version
Stricter processing limit for legacy PGP files encrypted with two-key Triple DES	Oracle Integration applies a stricter processing limit when decrypting legacy PGP files encrypted with two-key Triple DES (TDES). Files with encrypted content exceeding approximately 512 KiB may fail during decryption. This limit affects the stage file action, FTP Adapter, and File Adapter. Perform the following steps: 1. Update the sending system to encrypt new PGP files using AES-256 instead of two-key Triple DES. The existing PGP public/private key pair typically does not need to be replaced. 2. Send an AES-256-encrypted test file using the existing PGP public key. Confirm that Oracle Integration decrypts the file successfully using the existing integration configuration.	26.07
Extension group support for an Oracle Cloud Infrastructure Vision action	You can add an Oracle Cloud Infrastructure Vision action to an extended integration in an accelerator project. When Oracle uploads newer versions of accelerator projects to the Integration Store, you can upgrade an accelerator project to this newer version automatically without losing your Oracle Cloud Infrastructure Vision extensions. See Add an Oracle Cloud Infrastructure Vision Action to an Extended Integration in <i>Using Integrations in Oracle Integration 3</i>.	26.07

Feature	Description	Minimum Version
Oracle Cloud Infrastructure Document Understanding action - Enhancements	The Oracle Cloud Infrastructure Document Understanding action continues to be enhanced with new functionality: - You can consume models available in other regions. You select the region to use when configuring the Oracle Cloud Infrastructure Document Understanding action, then choose the compartment for the selected region in which Oracle Integration is installed. - You can use the Oracle Cloud Infrastructure Document Understanding action in government regions. - The Analyze document (with confidence score) operation is supported for custom models. This operation analyzes a document and extracts structured information while providing a confidence score for each extracted field. - Multiple pages in a custom model are automatically supported. This capability allows the model to extract information accurately even when data spans several pages, rather than being confined to the first page or a single page. - V2.0 custom models are supported. V2.0 custom models move from a training-based process to a generative, prompt-based process, making custom extraction faster and more flexible. See Creating a Custom Generative Model V2.0. See Extract Document Information with a Document Understanding Action in <i>Using Integrations in Oracle Integration 3</i>.	26.07
AI suggests best practices when creating or editing integrations	When creating or editing integrations using AI (within a project), the AI might provide best practices that might be helpful in improving the integration flow. See Use AI to Create an Integration and Use AI to Edit an Integration in <i>Using Integrations in Oracle Integration 3</i>.	26.07
Generate test cases for an integration using AI	You can use AI to generate test cases for an integration (within a project). You can view, download, and regenerate the test cases. See Use AI to Generate Test Cases for an Integration in <i>Using Integrations in Oracle Integration 3</i>.	26.07
Translate data between native JSON format and flat, stringified JSON	You can directly translate data between a native JSON payload and flat, stringified JSON with the data translate action. The data translate action simplifies integration design by removing the need for multiple stage file actions and a JavaScript action function to perform the translation. See Translate Data Between a Native JSON Payload and Flat, Stringified JSON with a Data Translate Action in <i>Using Integrations in Oracle Integration 3</i>.	26.07
OpenAI Adapter - File delete operation support	The OpenAI Adapter supports the Delete file API, which lets you delete the specified uploaded file from your account/project. After deletion, the file can no longer be used with APIs that reference it. See OpenAI Adapter Capabilities in <i>Using the OpenAI Adapter with Oracle Integration</i>.	26.07
Retry for-each and parallel actions	You can select an Enable Retry option in the for-each action (for schedule integrations) and parallel action. This selection causes a retry to occur if a branch completion error occurs. Up to three retries are attempted. See Loop over Repeating Elements with a For-Each Action and Process Tasks in Parallel with a Parallel Action in <i>Using Integrations in Oracle Integration 3</i>.	26.07
OCI Object Storage Action – Dynamic bucket name support	You can select the compartment and bucket during design time, while passing the bucket name dynamically at runtime. This capability allows the same integration to work across different buckets without requiring redesign or reconfiguration for each bucket change. See Override the Object Storage Bucket Name at Runtime in <i>Using Integrations in Oracle Integration 3</i>.	26.07

Feature	Description	Minimum Version
Connectivity agent - New operating system certifications	The connectivity agent is certified on Windows 22 and Redhead Linux 9.x. See System Requirements in <i>Using Integrations in Oracle Integration 3</i> .	26.07
OCI Cache Adapter - New adapter	The OCI Cache Adapter provides connectivity to OCI Cache clusters with support for string and list operations, TTL-based caching, key existence checks, private endpoint connectivity, and key prefix strategies. See OCI Cache Adapter Capabilities in <i>Using the OCI Cache Adapter with Oracle Integration 3</i> .	26.07
Microsoft SharePoint Adapter - OAuth Authorization Code Credentials and PKCE support	The Microsoft SharePoint Adapter supports OAuth 2.0 Authorization Code Credentials and Proof Key for Code exchange (PKCE), along with SharePoint site search functionality to help locate sites that do not appear in the Adapter Endpoint Configuration Wizard. See Microsoft Sharepoint Adapter Capabilities in <i>Using the Microsoft SharePoint Adapter with Oracle Integration 3</i> .	26.07
Snowflake Adapter - Key-pair authentication and single-use refresh token support	The Snowflake Adapter supports key pair authentication and single-use refresh token rotation. When single-use refresh tokens are enabled in the Snowflake security integration, Snowflake issues a new refresh token each time the previous refresh token is used. See Snowflake Adapter Capabilities in <i>Using the Snowflake Adapter with Oracle Integration 3</i> .	26.07
Private endpoint support for more adapters	You can configure the Slack Adapter to connect to endpoints using a private virtual cloud network (VCN). See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i> .	26.07
ActiveMQ Adapter - Standard filter and XSD support	The ActiveMQ Adapter supports XSD documents and dynamic address and queue mapping for invoke connections. See ActiveMQ Adapter Capabilities and Trigger or Invoke Message Structure Page in <i>Using the ActiveMQ Adapter with Oracle Integration 3</i> .	26.07
REST Adapter - Enhancements	- You can enable support for dynamic JSON content in trigger connection request and invoke connection response payloads in the Adapter Endpoint Configuration Wizard. When enabled, any additional JSON keys present in the runtime JSON payload are translated and made available in the integration, even if they were not defined in the originally configured structure. For trigger connections see Capabilities When Configuring a Trigger Connection to Expose an Integration as a REST API and REST Adapter Trigger Request Page. For invoke connections, see Capabilities When Configuring an Invoke Connection to Consume External REST APIs and REST Adapter Invoke Response Page. For a use case, see Updating JSON Content Dynamically for Trigger Request and Invoke Response Connection Payloads. - You can disable automatic failure retries of HTTP 504 gateway timeout errors on invoke connections. This selection prevents Oracle Integration from performing three automatic retries of HTTP 504 gateway timeout errors during synchronous invoke calls. See Capabilities When Configuring an Invoke Connection to Consume External REST APIs and REST Adapter Invoke Basic Information Page in <i>Using the REST Adapter with Oracle Integration 3</i>.	26.07

Feature	Description	Minimum Version
Oracle Autonomous AI Transaction Processing (ATP) Adapter - Hybrid index operations support	The Oracle Autonomous AI Transaction Processing (ATP) Adapter supports hybrid index operations from an invoke connection, including ingesting documents into a hybrid index, searching a hybrid index, and checking the status of a hybrid index ingestion job. See Oracle Autonomous AI Transaction Processing (ATP) Adapter Capabilities and Invoke Hybrid Index Operations Page in <i>Using the Oracle Autonomous Transaction Processing Adapter with Oracle Integration 3</i> .	26.07
Salesforce Adapter - Client Credentials security policy and External Client Apps support	The Salesforce Adapter supports the Client Credentials security policy using Salesforce External Client Apps and supports External Client Apps with ROPC and Basic Authentication migration paths. See Salesforce Adapter Capabilities in <i>Using the Salesforce Adapter with Oracle Integration 3</i> .	26.07
Jira Adapter - PKCE support with the Authorization Code Credentials security policy	The Jira Adapter supports use of the PKCE extension with the Authorization Code Credentials security policy. See Jira Adapter Capabilities in <i>Using the Jira Adapter with Oracle Integration 3</i> .	26.07
Renaming of some database adapters	- The Oracle Autonomous Data Warehouse Adapter is renamed to the Oracle Autonomous AI Lakehouse (LH) Adapter. - The Oracle Database Adapter is renamed to the Oracle AI Database Adapter. - The Oracle Autonomous Transaction Processing Adapter is renamed to the Oracle Autonomous AI Transaction Processing (ATP) Adapter.	26.07
Microsoft SQL Server Adapter - Azure Synapse Database connectivity support	The Microsoft SQL Server Adapter is certified to integrate with Azure Synapse. Azure Synapse Analytics is a cloud-based analytics service from Microsoft Azure that combines data integration, data warehousing, big data analytics, and business intelligence into a single platform. See Microsoft SQL Server Adapter Capabilities in <i>Using the Microsoft SQL Server Adapter with Oracle Integration 3</i> .	26.07
Attention! Download the latest mTLS wallets for some adapters	DigiCert has announced that it will stop trusting G1 root certificates, effective April 15, 2026. This change impacts customers using Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Advanced Queuing (AQ) Adapter, Oracle Advanced Queuing (AQ) JMS Adapter, Oracle AI Database Adapter, and Oracle Database Cloud Service Adapter connections configured with wallet-based mutual TLS (mTLS) authentication. You must download the latest mTLS wallets. See Action Required: Re-download mTLS Wallets with DigiCert G2 Certificates .	N/A
Attention! Retirement of Username Password Policy for the Salesforce Adapter	Salesforce plans to retire the Salesforce Username Password Policy security policy with the Summer 2027 release. In the SOAP-based Salesforce Adapter, this policy is not supported for API versions 65 or later, but remains available for versions 31 to 64 until the Summer 2027 release. See SOAP API login() Retirement . SOAP-based Salesforce Adapter customers are strongly advised to upgrade their existing connections to use either the Authorization Code Credentials or Resource Owner Password Credentials security policy. Create any new connections using only these two supported authentication methods moving forward. See Configure Connection Security in <i>Using the Salesforce Adapter with Oracle Integration 3</i> .	N/A
Attention! Important changes for the SOAP Adapter	Enable MTOM for the SOAP Adapter with ERP endpoints. You must enable development shapes by release 26.07 and production shapes by release 26.07. This is the final time an extension is provided. See here for more information.	N/A

Robotic Process Automation Features

Feature	Description	Minimum Version
Test a Robot Locally as you Build	You can test a robot locally on the canvas, while you build the robot. The robot runs on your computer, using a locally installed robot agent. Test often as you build to ensure that the robot works as expected and correct any errors. See Test a Robot Locally as you Build in <i>Using Robots in Oracle Integration 3</i>.	26.07
New action: Throw Fault	A new action is available to create and throw your own faults when the robot should intentionally raise a fault. This is useful when the flow detects a business validation issue, reaches an unrecoverable condition, or needs to pass an error from a fault handler back to the parent flow. See Add a Throw Fault Action in <i>Using Robots in Oracle Integration 3</i>.	26.07

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version
Export/import of HL7 messages and schemas	You can export and import individual HL7 messages and schemas between projects or from one instance to another (for example, from a development instance to a production instance). See Export and Import a Healthcare Message and Export and Import a Healthcare Schema in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i>.	26.07
Audit trail enhancements for HIPAA compliance	The audit trail has been enhanced for HIPAA compliance to show the business identifier for an integration when you hover over the Message column for a view action. See Check the Audit History for an Integration or Other Component in <i>Using Integrations in Oracle Integration 3</i>.	26.07

B2B for Oracle Integration Features

Feature	Description	Minimum Version
Test a schema	You can now test a schema with a sample payload to verify that it is configured correctly. See Test a B2B Schema in <i>Using B2B for Oracle Integration 3</i>.	26.07
Shared inbound backend integrations	You can now create inbound backend integrations that can be shared across projects. When creating inbound agreements, you can select a <i>shared</i> inbound integration instead of creating a new one, helping you reuse existing integrations that meet your business requirements. See Inbound Message Processing and Create Agreements in <i>Using B2B for Oracle Integration 3</i>.	26.07

Feature	Description	Minimum Version
FTP polling with trigger	With the new FTP polling with trigger option in FTP transport, you can poll files for processing at specified time intervals (seconds). See <i>Define an FTP Transport in Using B2B for Oracle Integration 3</i> .	26.07
Suppress DOCTYPE generation	For RosettaNet, cXML, and custom XML B2B documents, you can suppress generation of the DOCTYPE declaration in outbound DTD-based payloads. To do so, select Suppress DOCTYPE Generation under Parameters when creating custom document definitions for these document standards. See the following in <i>Using B2B for Oracle Integration 3</i> : - Use the RosettaNet Document Standard - Use the cXML Document Standard - Use the Custom Document Standard	26.07

File Server Features

Feature	Description	Minimum Version
Improved File Server connections metric accuracy	Fixed an issue where the File Server connections metric might intermittently report stale values. The metric now accurately reflects the active connection count at the time of emission. See <i>How Many Concurrent Connections Can I Have? in Using File Server in Oracle Integration 3</i> .	26.07

Process Automation Features

Starting from 26.04 release, you can view the known issues for Process Automation at Process Automation Issues in *Known Issues for Oracle Cloud Infrastructure Process Automation*.

Feature	Description	Minimum Version
Oracle Assistant removed	As of release 26.07, Oracle Assistant, which is a digital assistant, is no longer available in Oracle Cloud Infrastructure Process Automation.	26.07
New service limit for email subjects	A new service limit has been published. The maximum number of characters in an email subject is 200. See <i>Service Limits in Administering Oracle Cloud Infrastructure Process Automation</i> .	26.07
View up to 500 notifications	The user interface now allows you to view up to 500 notifications at a time. See <i>Manage Notifications in Using Oracle Cloud Infrastructure Process Automation</i> .	26.07
New service limit for instantiated activities	A new service limit has been published. The maximum number of times an activity can be instantiated in a process instance is 10. Additional allowances are available for multi-instance loops. See <i>Service Limits in Administering Oracle Cloud Infrastructure Process Automation</i> and <i>View the Reason for a Failure in Using Oracle Cloud Infrastructure Process Automation</i> .	26.07

June 2026 (26.04.2)

Common Features

Feature	Description	Minimum Version
New Oracle home page	An enhanced Home page is visible when you log in to Oracle Integration. The Home page let's you view a mini dashboard of relevant monitoring metrics, discover what's new in Oracle Integration, link directly to your most recent projects, start a new project, or browse the Oracle store for recipes and accelerators to install. The new Home page is currently only visible for regions in the commercial OC1 realm. See Get Familiar with the Home Page in <i>Getting Started with Oracle Integration 3</i>.	26.04.2
Attention! Ciphers for Fusion (SaaS) updates don't impact Oracle Integration	A recent knowledge base article (KB811821 by Fusion (SaaS)) announced updates to supported ciphers for Fusion (SaaS). These changes <i>don't</i> apply to Oracle Integration. You don't need to make any configuration changes for Oracle Integration as a result of the announcement.	N/A
New guided tour for human in the loop	In case you missed it: Ready to learn how human in the loop helps establish governance and trust for agentic AI? Check out the new guided tour! See Introduction to Human in the Loop.	N/A

April 2026 (26.04)

Common Features

Feature	Description	Minimum Version
New guided tour for human in the loop	Ready to learn how human in the loop helps establish governance and trust for agentic AI? Check out the new guided tour! See Introduction to Human in the Loop .	N/A

Feature	Description	Minimum Version
New service metrics and dimension	There are new service metrics: • AsyncInboundRequestsDepth—The number of requests in the async queue. • FileserverInboundConnections—The number of sessions requested in File Server. • SchedulerTriggeredInstancesCount—The number of scheduled requests. There is a new flowType dimension, which specifies the integration flow type: sync or async. It applies to the following metrics: • NumberOfInboundRequests • InboundRequestProcessingTime See the following topics in <i>Provisioning and Administering Oracle Integration 3</i>: • Available Metrics Charts • Oracle Integration Metrics for Custom Charts • Oracle Integration Dimensions for Custom Charts	26.04
Data retention settings for Human in the Loop	The data retention settings for Oracle Integration also apply to Human in the Loop workflow instances that are in Completed, Expired, or Terminated statuses. See Edit the Data Retention Period for an Instance in <i>Provisioning and Administering Oracle Integration 3</i>.	26.04
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Sync New Cases from Microsoft Dynamics 365 to ServiceNow • Extract Approved Expense Reports from SAP Concur and Write to an FTP Server • Create AI Assisted Clinical Care Plans • Leverage RPA to automate group creation and assign users in Oracle ERP - RFRPA	26.04

Agentic AI Features

Feature	Description	Minimum Version
Agentic AI Patterns	Here are the new features for agentic AI patterns: • Agentic AI pattern versioning: You can now version agentic AI patterns with a minor or major version. • Agentic AI pattern cloning: You can now clone an agentic AI pattern. • Agentic AI pattern activation: When you activate an agentic AI pattern, all integrations used by the pattern are also activated. • Draft state for agentic AI patterns: If guidelines are not provided for an agentic AI pattern, the pattern is in Draft state. • Pattern usage: You can now see which patterns are using which integration. • New agentic AI patterns: – ReAct for Oracle Cloud Infrastructure Generative AI: Use to connect to the OCI Generative AI large language models (LLMs). Supports xAI and OpenAI models. – Plan: Use to implement plan and execute within your integrations and use multiple LLMs.	26.04

Feature	Description	Minimum Version
Agentic AI tools	- Improved dependency checks for agentic AI tools and related integrations - Integrations with any verb supported by the REST Adapter(GET, POST, PUT, DELETE, PATCH) can now be used as agentic AI tools. See Register an Integration as an Agentic AI Tool in <i>Using Agentic AI in Oracle Integration 3</i>.	26.04
Improved MCP Error Handling	Errors in the MCP server are now standardized according to the MCP specification.	26.04
AI agents	- Project export now includes AI agents, agentic AI tools, AI patterns, prompt templates, and related integrations and connections. - You can now version and clone AI agents. - You can now change the agentic AI pattern associated with an AI agent.	26.04
Knowledge base	Create your own knowledge base with corporate documents and perform a knowledge base search from within your integrations. Publish your knowledge base as a tool to be discovered with MCP, or use your knowledge bases with agentic AI agents. See Build Knowledge Bases in <i>Using Agentic AI in Oracle Integration 3</i> .	26.04
Human in the loop	- Human in the loop recipe as agentic AI tool Add human oversight to agentic AI faster by creating a tool from a human in the loop recipe. The recipe bundles all assets required for a simple human approval workflow, helping you get started quickly without having to create those assets manually. See Start from a Recipe in <i>Using Human in the Loop in Oracle Integration 3</i>. - New user interfaces for workflow and data mapping - The workflow canvas now has an updated look and feel that aligns with the Oracle Integration user experience. - See Model Workflows in <i>Using Human in the Loop in Oracle Integration 3</i>. - The data mapping editor is now more intuitive, with improved user experience. - See Map Data in <i>Using Human in the Loop in Oracle Integration 3</i>. - Workflow deployment and monitoring Human in the loop workflows can now be deployed and monitored like any other project assets. See Deploy a Workflow and Monitor a Workflow in <i>Using Human in the Loop in Oracle Integration 3</i>.	26.04

Integration and Connectivity Features

Feature	Description	Minimum Version
Copy standalone integrations to projects	Based on your AI World feedback, projects have been updated. You can now copy one or multiple standalone integrations that currently exist outside of projects to a newly-created or existing project. See Copy Standalone Integrations to a Project in <i>Using Integrations in Oracle Integration 3</i> .	26.04
AI assistant	The AI assistant is available in Enterprise and Healthcare editions only. See Enable or Disable AI Assistant in <i>Using Integrations in Oracle Integration 3</i> .	26.04

Feature	Description	Minimum Version
Edit integrations using AI more seamlessly	When editing an integration using AI, you no longer need to save the integration each time you make an AI-powered update. See Use AI to Edit an Integration in <i>Using Integrations in Oracle Integration 3</i> .	26.04
Create integrations using AI based on integrations from the Integration Store	The user experience to create an integration using AI based on integrations from the Integration Store has been improved. See Use AI to Create Integrations Based on Integrations from the Integration Store in <i>Using Integrations in Oracle Integration 3</i> .	26.04
Mapping recommendations	The mapping recommendations feature is now supported for the FTP Adapter too. The mapping recommendations feature is available only in the following region: UK South (London) - LHR. See Generate Mapping Recommendations in <i>Using the Oracle Mapper with Oracle Integration 3</i> .	26.04
Oracle Cloud Infrastructure Vision action - Custom model image classification support	The Oracle Cloud Infrastructure Vision action now lets you use custom models to perform image classification. See Analyze and Extract Information from Images with a Vision Action in <i>Using Integrations in Oracle Integration 3</i> .	26.04
Oracle Cloud Infrastructure Generative AI action - On demand chat enhancements	The Oracle Cloud Infrastructure Generative AI action now supports OpenAI and xAI models for chat in the On demand category. The Tools attribute allows you to integrate external tools and APIs with the model. The Tools attribute is supported for the Meta, OpenAI, and xAI models. See Generate, Embed, or Rerank Text with a Generative AI Action in <i>Using Integrations in Oracle Integration 3</i> .	26.04
Oracle Cloud Infrastructure Document Understanding action - Enhancements	The Oracle Cloud Infrastructure Document Understanding action continues to be enhanced. - When you select the Custom models category, you can now select the Document classification action. This action enables integrations to use customer-trained models to classify documents based on business-specific categories. See Extract Document Information with a Document Understanding Action in <i>Using Integrations in Oracle Integration 3</i>. - You can add an Oracle Cloud Infrastructure Document Understanding action to an extended integration. See Add an OCI Document Understanding Action to an Extended Integration in <i>Using Integrations in Oracle Integration 3</i>.	26.04
OCI Object Storage native action - custom response header support	You can define custom response headers when uploading objects to an object storage bucket in Oracle Cloud Console. You can then specify those same headers with the Download object operation when configuring the OCI Object storage action in the integration canvas. This capability allows Oracle Integration retrieval-augmented generation (RAG) functionality to retrieve custom response headers and use that information to provide context. See Invoke Oracle Cloud Infrastructure Object Storage from an Integration with an OCI Object Storage Action and Specify Custom Response Headers in the Oracle Cloud Infrastructure Object Storage Action in <i>Using Integrations in Oracle Integration 3</i> .	26.04
UI support for Jet 19	The integration canvas, mapper, design UI, and monitoring UI have been upgraded to Jet 19.	26.04

Feature	Description	Minimum Version
REST Adapter - Multi Key Authentication security policy support	The REST Adapter provides support for the Multi Key Authentication security policy. This policy requires the use of multiple forms of authentication, such as combining passwords, hardware tokens, biometrics, or cryptographic keys, to authorize an action or access sensitive resources. See Configure Connection Security and Specify Custom Header Security Values to Authenticate with Endpoint Applications in <i>Using the REST Adapter with Oracle Integration 3</i>.	26.04
REST Adapter - Dynamic connection support	You can dynamically update the REST Adapter invoke connection to use at runtime. This feature lets you use a single integration to send requests to multiple endpoints of the same application and eliminates the need to create a separate integration for each endpoint or multiple invoke connections configured in a switch action in a single integration. See Dynamically Update REST Adapter Invoke Connections at Runtime in <i>Using the REST Adapter with Oracle Integration 3</i>.	26.04
Apache Kafka Adapter - SASL/SCRAM security policy support	The SASL/SCRAM security policy is supported. SASL/SCRAM is a robust mechanism for secure, standards-based authentication, preferred in many enterprise environments for its resiliency against common password-based attacks. Passwords are not transmitted directly. Only evidence (cryptographic proof) is exchanged, reducing the risk of password theft. See Kafka Adapter Capabilities and Configure Connection Security in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i>.	26.04
BigQuery Adapter - New adapter	The BigQuery Adapter enables you to integrate Google BigQuery with Oracle Integration. BigQuery is a cloud-based analytics database service that allows you to load, insert, query, and extract large volumes of data efficiently. See BigQuery Adapter Capabilities in <i>Using the BigQuery Adapter with Oracle Integration 3</i>.	26.04
Databricks Adapter - New adapter	The Databricks Adapter enables you to integrate the Databricks database residing behind the firewall of your on-premises environment with Oracle Integration through use of the on-premises connectivity agent. The Databricks Adapter provides seamless integration with Databricks, a cloud-based database built on the lakehouse architecture. The Databricks Adapter supports configuration of SQL warehouses, schemas, and tables. See Databricks Adapter Capabilities in <i>Using the Databricks Adapter with Oracle Integration 3</i>.	26.04
ActiveMQ Adapter - New adapter	The ActiveMQ Adapter enables you to create an integration in Oracle Integration that connects to the ActiveMQ Artemis messaging system. The ActiveMQ Adapter provides built-in connectivity to ActiveMQ Artemis brokers, making it easy to publish and consume messages between systems. See ActiveMQ Adapter Capabilities in <i>Using the ActiveMQ Adapter with Oracle Integration 3</i>.	26.04
Microsoft SharePoint Adapter - Site-level scoping	For trigger connections, you can configure a specific site for subscribing to events. For invoke connections, you can select the site on which you want to perform data manipulation operations. See Microsoft SharePoint Capabilities in <i>Using the Microsoft SharePoint Adapter with Oracle Integration 3</i>.	26.04

Feature	Description	Minimum Version
Azure Event Grid Adapter - Enhancements	The Azure Event Grid Adapter now provides full support for working with both public and private namespaces. These capabilities enable the Azure Event Grid Adapter to provide secure event publishing, polling, and subscriptions aligned to the network design, while supporting both trigger and invoke integration patterns. Azure Event Grid namespaces are top-level resources that provide isolation, security, and management for event-driven workloads. These namespaces offer a dedicated endpoint and centralized control for multiple topics and subscriptions. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	26.04
Microsoft SQL Server Adapter - Active Directory Service Principal security policy support	The Active Directory Service Principal security policy is supported. This policy uses unique security identities, known as a service principal, within Microsoft Active Directory (AD) or Azure Active Directory (AD) to authenticate and authorize applications or services, instead of relying on user accounts. The Active Directory Service Principal security policy also enables connectivity to the Microsoft Fabric SQL Database. See Microsoft SQL Server Adapter Capabilities and Configure Connection Security in <i>Using the Microsoft SQL Server Adapter with Oracle Integration 3</i>.	26.04
Oracle NetSuite REST Adapter - JWT Client Credentials Assertion security policy support	The Oracle NetSuite REST Adapter now supports JWT Client Credentials Assertion, enabling more secure, token-based authentication when integrating with NetSuite. This policy allows for secure invoke integrations with NetSuite services. This release also introduces a new Dataset operation type on the Basic Info page. With this enhancement, you can seamlessly perform dataset-driven actions, such as Get List of Datasets and Execute Datasets, to simplify orchestration and improve operational efficiency. See Oracle NetSuite REST Adapter Capabilities in <i>Using the Oracle NetSuite REST Adapter with Oracle Integration 3</i>.	26.04
Shopify Adapter - OAuth 2.0 Client Credentials security policy support	The Client Credentials security policy is now supported. The Client Credentials security policy helps you establish connections with the Shopify Adapter using the newly created custom app. See Shopify Adapter Capabilities in <i>Using the Shopify Adapter with Oracle Integration 3</i>.	26.04
Shopify GraphQL Adapter - Enhancements	The Shopify GraphQL Adapter continues to be enhanced: • The OAuth 2.0 Client Credentials security policy is supported. The Client Credentials security policy helps you establish connections with the Shopify GraphQL Adapter using the newly created custom app. • The Bulk module and Bulk Operations Finish event are supported. • The Customers module supports the following events: – Customer Purchasing Summary – Customer Email Marketing Consent Update – Customer SMS Marketing Consent Update – Customer Tags Added – Customer Tags Removed See Shopify GraphQL Adapter Capabilities in <i>Using the Shopify GraphQL Adapter with Oracle Integration 3</i>.	26.04
Snowflake Adapter - OAuth Client Credentials security policy connectivity agent support	The connectivity agent is only supported with the OAuth Client Credentials security policy. See Snowflake Adapter Capabilities in <i>Using the Snowflake Adapter with Oracle Integration 3</i>.	26.04

Feature	Description	Minimum Version
GCP Pub Sub Adapter - Dynamic topic name support	If a topic or subscription already exists for publishing, pulling, or acknowledging messages, you can change the topic or subscription in the mapper at runtime. However, the corresponding request and response mappers remain the same as configured on the Adapter Endpoint Configuration Wizard page. See <i>Invoke Configuration Page</i> in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i> .	26.04
Project import support for RAB adapter project ID updates	If you export and import a project that includes a RAB-based adapter that specifies the project ID value, that value is automatically updated to reflect the new project ID. No design-time editing of the project ID is required.	26.04
Attention! Download the latest mTLS wallets for some adapters	DigiCert has announced that it will stop trusting G1 root certificates, effective April 15, 2026. This change impacts customers using Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Advanced Queuing (AQ) Adapter, Oracle Advanced Queuing (AQ) JMS Adapter, Oracle AI Database Adapter, and Oracle Database Cloud Service Adapter connections configured with wallet-based mutual TLS (mTLS) authentication. You must download the latest mTLS wallets. See Action Required: Re-download mTLS Wallets with DigiCert G2 Certificates .	N/A
Attention! Retirement of Username Password Policy for the Salesforce Adapter	Salesforce plans to retire the Salesforce Username Password Policy security policy with the Summer 2027 release. In the SOAP-based Salesforce Adapter, this policy is not supported for API versions 65 or later, but remains available for versions 31 to 64 until the Summer 2027 release. See SOAP API login() Retirement . SOAP-based Salesforce Adapter customers are strongly advised to upgrade their existing connections to use either the Authorization Code Credentials or Resource Owner Password Credentials security policy. Create any new connections using only these two supported authentication methods moving forward. See <i>Configure Connection Security</i> in <i>Using the Salesforce Adapter with Oracle Integration 3</i> .	N/A
Attention! Important changes for the SOAP Adapter	Enable MTOM for the SOAP Adapter with ERP endpoints. You must enable development shapes by release 26.04 and production shapes by release 26.07. This is the final time an extension is provided. See here for more information.	N/A
Adapter Certification updates	The following adapters have been certified with additional application versions: • Shopify GraphQL Adapter • Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Advanced Queuing (AQ) Adapter, Oracle Advanced Queuing (AQ) JMS Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Database Cloud Service Adapter, and Oracle AI Database Adapter • Apache Kafka Adapter • RabbitMQ Adapter For details, see the Connectivity Certification Matrix .	26.04

Robotic Process Automation (RPA) Features

Feature	Description	Minimum Version
Configure AI-Assisted Self-Healing Robots	An AI-assisted self-healing robot is an intelligent execution unit capable of autonomously detecting, analyzing, and recovering from errors during robot flow execution. An AI-assisted self-healing robot improves the reliability when minor or incremental UI changes are implemented. For example, if there are modifications in XPath or CSS selectors, the self-healing feature will recommend the possible alternatives by analyzing the error, in context of the automation, using recommendations from Oracle Cloud Infrastructure Generative AI. It will then apply the recommendations to successfully recover the robot from the error and proceed with the rest of the automation. See Configure AI-assisted Self-Healing Robots in <i>Using Robots in Oracle Integration 3</i>.	26.04
Optimize performance with autoscaling environment pools	When you configure an environment pool, you can enable autoscaling by providing additional details such as the Oracle Cloud Infrastructure Instance Pool OCID, minimum and maximum number of robot agents, and scaling policies that define when to scale-in or scale-out based on environment pool utilization, ensuring optimal performance and efficient resource utilization. See Configure an Environment Pool with Autoscaling in <i>Using Robots in Oracle Integration 3</i>.	26.04
Enhance exception handling for robots	Robust exception handling is now built directly into the RPA framework, enabling greater control over how automation handles failures. You can define scopes to group related robot actions and configure fault handlers for those scopes. See Add a Scope in <i>Using Robots in Oracle Integration 3</i>.	26.04
Optimize operational visibility	You can set up alerts to receive notifications when a robot agent becomes unavailable, enabling proactive monitoring and quicker issue resolution. See Configure Notification Emails in <i>Using Integrations in Oracle Integration 3</i>.	26.04
Auto-scroll UI elements into view	If a UI element is outside the viewport, it may not be visible, causing the robot execution to fail. UI elements are now automatically scrolled into view and made visible before the action is executed.	26.04

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version
Clinical Document Architecture (CDA) - Error handling	When you upload a CDA Schematron file for validation, you can enable the Fault integration flows at runtime on Schematron business rule validation checkbox to prevent the integration from throwing an exception when there are validation errors. See Create a Clinical Document Architecture Document in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i>.	26.04

B2B for Oracle Integration Features

Feature	Description	Minimum Version
New document standards: JSON and cXML	B2B for Oracle Integration now supports two new document standards - JSON and cXML. See the following topics in <i>Using B2B for Oracle Integration 3</i>: - Create a New B2B Schema - Use the JSON Document Standard - Use the cXML Document Standard	26.04
Cut, copy, and paste options in schema editor	You can now cut and paste schema constructs such as segment, loop, child element and composite element in the schema editor. Additionally, you can also copy and paste loops. See Add Segments and Other Schema Constructs in <i>Using B2B for Oracle Integration 3</i>.	26.04
Looping enhancements in schemas	We have added support to enforce child loop parsing when parent and child loops share the same starting segment. You can configure element-based conditions to prioritize matching the child loop over the parent loop. See Enable Child Loop Parsing in <i>Using B2B for Oracle Integration 3</i>.	26.04
Override document version and type for EDIFACT schemas	You can now define an override document version and document type for EDIFACT schemas within projects. Override values are available during schema and document setup, and are supported in agreements and B2B action document selection. See Create a New B2B Schema in <i>Using B2B for Oracle Integration 3</i>.	26.04
AS4 security enhancement	In AS4 transport Receive section, a new check box Use password digest is introduced. Selecting this check box will automatically send the password in digest form instead of plain text in the payload. See Define an AS4 Transport in <i>Using B2B for Oracle Integration 3</i>.	26.04

File Server Features

Feature	Description	Minimum Version
Enhanced File Server security with support for ECDH-SHA2 key exchange algorithm.	You can select the following Elliptic Curve Diffie-Hellman(ECDH-SHA2) algorithms: - ecdh-sha2-nistp256 - ecdh-sha2-nistp384 - ecdh-sha2-nistp521 See Configure File Server Settings in <i>Using File Server in Oracle Integration 3</i>.	26.04
New metric: File Server connections for improved monitoring capabilities	You can monitor concurrent connections consumed by File Server on the Oracle Cloud Console using the File Server connections metric. This insight will allow you to better understand the system load and make informed decisions. See About the Charts in <i>Provisioning and Administering Oracle Integration 3</i>.	26.04

March 2026 (26.01.2)

Feature	Description	Minimum Version
Agentic AI	- Invoke an AI agent from an integration You can start an AI agent from an integration and incorporate AI agents into existing integrations. The prerequisite is that the AI agent must be in an Active state. See Invoke an AI Agent from an Integration. - View AI agent endpoint information You can now view endpoint information for an AI agent. In the project, from the navigation pane, select AI Agents, select the AI agent, click Actions, then Run. In the Test agent page, click the Endpoint metadata button.	26.01.2

January 2026 (26.01)

Common Features

Feature	Description	Minimum Version
Updated version of <i>Getting Started with Oracle Integration 3</i>	The refreshed guide helps you map your business challenges to the right Oracle Integration automation technologies, with step-by-step guidance and real-world case studies to support your journey. Check out the updated guide to confidently build efficient and effective automation solutions. See Welcome to Oracle Integration in <i>Getting Started with Oracle Integration 3</i>.	N/A
Oracle-managed disaster recovery enhancements	Oracle-managed disaster recovery continues to be enhanced: - Event-based integrations are supported in Oracle-managed disaster recovery environments. See Fail Over to the Other Instance in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>. - Customer-managed custom endpoints are supported. To use this functionality, you must explicitly enable access to customer-managed custom endpoints on the primary and secondary instances prior to performing a failover. See Enable Customer-Managed Custom Endpoints on the Primary and Secondary Instances in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>. - Creation of DR protection groups for OCI Full Stack Disaster Recovery is supported. See Create Disaster Recovery Protection Groups for Full Stack Disaster Recovery in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>. - Ability to view full stack disaster recovery information on the Instance Details page. See Create Disaster Recovery Protection Groups for Full Stack Disaster Recovery in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>.	26.01

Feature	Description	Minimum Version
Create separate allowlist rules for design time and runtime	You can now create distinct allowlist rules for Oracle Integration design time and runtime. This enhancement provides added security and flexibility, allowing you to define different access control lists (ACLs) for users managing integration projects (design time) versus those running integrations (runtime). This feature helps you ensure that partners and customers can access only what they need —protecting sensitive design resources while maintaining secure runtime operations. See <i>Restrict Access Using the Self-Service Allowlist Capabilities in Provisioning and Administering Oracle Integration 3</i>.	26.01
New quarterly maintenance schedule	In December 2025, Oracle sent a notification listing the quarterly maintenance schedule for the year. The notification included a 7-day window for each quarter, with separate windows for each shape (development and production). See <i>Updates to Your Instance in Provisioning and Administering Oracle Integration 3</i>.	N/A
Reorganized version of <i>Provisioning and Administering Oracle Integration 3</i>	The guide's new organization is based on grouping similar tasks, following the life cycle of your Oracle Integration instance: planning, provisioning, configuration, monitoring, and upgrade. This new structure helps both new and experienced administrators quickly locate relevant guidance. See <i>Get Started with Administration in Provisioning and Administering Oracle Integration 3</i>.	N/A
New <i>What is Oracle Integration</i> infographic	Explore our new Oracle Integration service infographic for a visual overview of core features, capabilities, and key benefits. This infographic offers an at-a-glance reference to help you understand how Oracle Integration can streamline, automate, and connect your business processes. See What is Oracle Integration?.	N/A
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: • Brazil East, Rio de Janeiro (SWQ) • Italy North, Turin (NRQ) • Malaysia West 2, Kulai (JBP) • Morocco West, Casablanca (LEJ) • Spain Central, Madrid (ORF) • US Midwest, Columbus (VKZ) • US Midwest, Lenexa (LXO) See <i>Availability in Provisioning and Administering Oracle Integration 3</i>.	N/A
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Shortlist Resumes Automatically Using Slack and OpenAI • Extract Document Information using OCI AI Services • Automate Customer Feedback Processing Using OCI AI Services and ServiceNow	26.01
Publish activity stream logs to Oracle Log Analytics	You can now publish your activity stream logs to Oracle Log Analytics. This is useful if your activity stream payload is large, because Oracle Cloud Infrastructure (OCI) public logging limits the size of log files. See <i>Use Oracle Log Analytics for Large Activity Stream Payloads in Provisioning and Administering Oracle Integration 3</i>.	25.10

Agentic AI Features

Feature	Description	Minimum Version
Conversation ID in AI agents	When an agent runs, a conversation ID is generated. Specify the conversation ID when sending data back to an AI agent or when you run an AI agent and want the AI agent to have knowledge of prompts, data, and decisions made in other runs. See Run an AI Agent with Knowledge of Previous Runs in <i>Using Agentic AI in Oracle Integration 3</i>.	26.01
Prompt templates in AI agents	Use prompt templates to create prompts that contain variable data. Data sent in the payload is combined with the prompt template language to create the prompt sent to the AI agent. See Pass Dynamic Data to AI Agents with Prompt Templates in <i>Using Agentic AI in Oracle Integration 3</i>.	26.01
ReAct Agent Pattern version is now 26.01	The ReAct agent pattern has been updated to version 26.1. If you created an AI agent in version 25.10, the AI agent has the ReAct pattern version 25.10. The AI agent will still work. If you want to use the AI agent with ReAct pattern 26.1, you need to create a new ReAct pattern with version 26.1, and recreate the AI agent with the newly created 26.1 ReAct pattern. If you create any new AI agents, you'll create a 26.1 ReAct pattern to associate with the AI agents.	26.01

Integration and Connectivity Features

Feature	Description	Minimum Version
Create integrations using AI based on integrations from the Integration Store	You can quickly create an integration using AI based on integrations from the Integration Store. See Use AI to Create Integrations Based on Integrations from the Integration Store in <i>Using Integrations in Oracle Integration 3</i>.	26.01
Support for new adapters when automatically configuring trigger/invoke using AI	When creating an integration using AI, automatic configuration of trigger/invoke is now supported for SOAP Adapter and Oracle Autonomous AI Transaction Processing (ATP) Adapter under specific conditions. See Use AI to Create an Integration in <i>Using Integrations in Oracle Integration 3</i>.	26.01
Regenerate documentation for a specific section in project documentation	When using AI to generate documentation about a project, you can now regenerate the documentation for a specific section. See Use AI to Generate Project Documentation in <i>Using Integrations in Oracle Integration 3</i>.	26.01
Mapping recommendations	When you generate mapping recommendations, the recommendations might now include functions/operators, and XSLT constructs (like for-each statements). The mapping recommendations feature is available only in the following region: UK South (London) - LHR. See Generate Mapping Recommendations in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	26.01
REST Adapter - AI-assisted endpoint configuration	You can now use AI to generate an endpoint configuration for a REST Adapter invoke connection. See REST Adapter Invoke Basic Information Page in <i>Using the REST Adapter with Oracle Integration 3</i>.	26.01

Feature	Description	Minimum Version
Enable or disable AI assistance features	You can enable or disable the AI assistance features for your Oracle Integration service instance. See Enable or Disable AI Features in <i>Using Integrations in Oracle Integration 3</i> .	26.01
OpenAI Adapter - Upload and list files support	The OpenAI Adapter supports uploading and listing files. See OpenAI Adapter Capabilities and Upload and List Files in <i>Using the OpenAI Adapter with Oracle Integration</i> .	26.01
Analyze and extract information from images with an Oracle Cloud Infrastructure Vision action	The Oracle Cloud Infrastructure Vision action now lets you use custom models for object detection. See Analyze and Extract Information from Images with a Vision Action in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Perform text analysis and translation with an Oracle Cloud Infrastructure Language action	The Oracle Cloud Infrastructure Language action continues to be enhanced: - For the Sentiment analysis action, you now have an option (in the wizard) to specify the level. - For the Personal identifiable information (PII)/ Private Health Information (PHI) action, you now have options (in the wizard) to specify the entities to be detected and the masking configuration. - For the Personal identifiable information (PII)/ Private Health Information (PHI) action, you can now map the Profile element and specify values for its attributes in the mapper. See Perform Text Analysis and Translation with a Language Action in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Oracle Cloud Infrastructure Document Understanding action - Custom model support	The Oracle Cloud Infrastructure Document Understanding action continues to be enhanced. You can now extract information from custom documents and show that information in key/value format in the activity stream at runtime. See Extract Document Information with a Document Understanding Action and Extract Information from a Custom Document with a Document Understanding Action in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Projects page enhancement	The filter on the Projects page now enables you to select Last updated to sort on the most recently updated projects. See Design and Monitor Integrations in Projects in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Integration description Property Values drawers	The description for integration properties is displayed in the Update Property Values and View Property Values drawers.	26.01
JQ function calls and date/time JQ filter support	Additional JQ function calls are now supported. Date and time JQ filters are also supported. See Define Custom Header Filters to Trigger Integrations in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Override the endpoint URL setting for the OCI Function action at runtime	You can specify the invoke endpoint URL to use at runtime in the mapper. This setting overrides the invoke endpoint URI specified in the OCI Function action. See Invoke Oracle Cloud Infrastructure Functions Directly from an Integration with an OCI Function Action in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Oracle NetSuite REST Adapter - New adapter	The Oracle NetSuite REST Adapter enables REST-based connectivity for NetSuite, aligned with NetSuite's transition from SOAP, supporting JSON, SuiteQL, RESTlets, and OAuth 2.0 Authorization Code Credentials. See Oracle NetSuite RST Adapter Capabilities in <i>Using the NetSuite RST Adapter with Oracle Integration 3</i> .	26.01

Feature	Description	Minimum Version
OpenSearch Adapter - New adapter	The OpenSearch Adapter enables secure, seamless connectivity between enterprise data and AI agents by powering vector search and Retrieval-Augmented Generation (RAG) use cases. See <i>OpenSearch Adapter Capabilities in Using the OpenSearch Adapter with Oracle Integration 3</i> .	26.01
Oracle Autonomous AI Transaction Processing (ATP) Adapter - Vector database search	The Oracle Autonomous AI Transaction Processing (ATP) Adapter supports an AI vector search, enabling semantic data discovery through natural language queries instead of traditional keyword-based searches. This enhancement allows integrations to retrieve information based on user intent, making data access more intuitive and context aware. See <i>Oracle Autonomous Transaction Processing Adapter Capabilities in Using the Oracle Autonomous Transaction Processing Adapter with Oracle Integration 3</i>	26.01
GraphQL Adapter - OAuth Authorization Code security policy support	The GraphQL Adapter supports PKCE with the OAuth Authorization Code security policy. See <i>Configure Connection Security in Using the GraphQL Adapter with Oracle Integration 3</i>	26.01
Microsoft Dynamics 365 CRM Adapter - Standard header support	The Microsoft Dynamics 365 CRM Adapter now supports the Return Response header to enhance data accuracy, runtime visibility, and record handling during Create, Update, and Query operations. This enhancement enables the Microsoft Dynamics 365 Web API to return the full entity payload immediately after a create or update operation. This enhancement removes the need for a follow-up GET request and reduces API round trips, improving overall performance, and integration efficiency. See <i>Invoke Headers Page in Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i> .	26.01
Migrate Salesforce Adapter WSDL-based connections	Support for WSDL-based Salesforce Adapter connections is being deprecated as part of ongoing improvements in Oracle Integration. These connections, created by uploading enterprise WSDL files, will not be supported starting with Release 26.04 for development instances and Release 26.07 for production instances. Customers using WSDL-based Salesforce connections are strongly advised to migrate their existing integrations to a connection using one of the OAuth security policies that doesn't rely on uploaded WSDL files. Create all new Salesforce connections using this connection type moving forward. See Action Required: Migrate WSDL-Based Salesforce Connections in Oracle Integration .	26.01
Attention! Download the latest mTLS wallets for some adapters	DigiCert has announced that it will stop trusting G1 root certificates, effective April 15, 2026. This change impacts customers using Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Advanced Queuing (AQ) Adapter, Oracle Advanced Queuing (AQ) JMS Adapter, Oracle AI Database Adapter, and Oracle Database Cloud Service Adapter connections configured with wallet-based mutual TLS (mTLS) authentication. You must download the latest mTLS wallets. See Action Required: Re-download mTLS Wallets with DigiCert G2 Certificates .	N/A

Feature	Description	Minimum Version
Attention! Retirement of Username Password Policy for the Salesforce Adapter	Salesforce plans to retire the Salesforce Username Password Policy security policy with the Summer 2027 release. In the SOAP-based Salesforce Adapter, this policy is not supported for API versions 65 or later, but remains available for versions 31 to 64 until the Summer 2027 release. See SOAP API login() Retirement. SOAP-based Salesforce Adapter customers are strongly advised to upgrade their existing connections to use either the Authorization Code Credentials or Resource Owner Password Credentials security policy. Create any new connections using only these two supported authentication methods moving forward. See Configure Connection Security in <i>Using the Salesforce Adapter with Oracle Integration 3</i>.	N/A
Microsoft Entra ID Adapter renaming	The Azure Active Directory Adapter has been renamed to the Microsoft Entra ID Adapter. See Microsoft Entra ID Adapter Capabilities in <i>Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	26.01
Shopify GraphQL Adapter -	Invoke functionality has been enhanced with an increase in the default nesting depth for generated queries. Previously limited to a maximum depth of three for Query, Create, Update, and Delete operations, the Shopify GraphQL Adapter now supports up to six levels of nesting. This enhancement provides greater flexibility to retrieve related objects in a single call, making query customization more efficient and user-friendly. See Shopify GraphQL Adapter Capabilities in <i>Using the Shopify GraphQL Adapter with Oracle Integration 3</i>.	26.01
Attention! Important changes for the SOAP Adapter	Enable MTOM for the SOAP Adapter with ERP endpoints. You must enable development shapes by release 26.01 and production shapes by release 26.07. This is the final time an extension is provided. See here for more information.	N/A

Robotic Process Automation (RPA) Features

Feature	Description	Minimum Version
Execute robot agents in air-gapped environments	If you have a secure VM setup in an air-gapped environment with no internet access (offline environment) and want to execute robot agents without internet access, you can export the robots and their dependencies from an online source environment as a ZIP file. You can then import this ZIP file into an offline target environment and execute robot agents without internet access. See Execute Robot Agents in Air-Gapped Environments in <i>Using Robots in Oracle Integration 3</i>.	26.01
Optimize robot agent polling with adaptive intelligence	You can use adaptive polling to optimize and adjust the polling frequency based on recent activity. If it is not yet time to poll, the process exits immediately. A new POLLING= property is available in <code>InstallerProfile.cfg</code>. See Update the Robot Agent's Configuration File in <i>Using Robots in Oracle Integration 3</i>.	26.01
Display environment pools observability details in graph format	You can now see the Utilization over time graph which shows the environment pools details and can be filtered. See Monitor Environments and Environment Pools in <i>Using Robots in Oracle Integration 3</i>.	26.01

Feature	Description	Minimum Version
Support full xpath target strategy for web table	When you target a UI element in the Locator field of a robot action, Oracle Integration automatically captures multiple selectors for the UI element. This feature is now available for web tables also. See View All Elements to Target in <i>Using Robots in Oracle Integration 3</i> .	26.01
New script: rpaAgentEnvDiagnosis	You can run the rpaAgentEnvDiagnosis script to perform a full diagnostic check of your robot environment to check the current environment status. See Update the Robot Agent's Configuration File in <i>Using Robots in Oracle Integration 3</i> .	26.01
New function: formatString()	A new function formats a template string using positional placeholders. See Functions in <i>Using Robots in Oracle Integration 3</i> .	26.01

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version
Chunking payload enhancements	Because the native payload size can be large, the Split payload into chunks operation enables you to split the payload into smaller messages for processing. This operation has been enhanced to enable you to specify the number of messages into which to split the payload and the size for each message. See Convert HL7 Messages with a Healthcare Action and Handle Inbound Debatching of Large HL7 Message Payloads in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	26.01

B2B for Oracle Integration Features

Feature	Description	Minimum Version
Override X12 document versions	You can override a standard X12 document version to specify subset variants such as UCS or VICS (for example: 4010UCS, 4010VICS) when creating a custom X12 schema. The overridden version will be available when selecting the document in inbound and outbound agreements. See Create a New B2B Schema in <i>Using B2B for Oracle Integration 3</i> .	26.01
Segment identifier start position support in fixed-length schemas	For fixed-length payloads, you can now configure the start position of segment identifier in the Create schema panel. The specified character offset is used during schema parsing, field mapping, and outbound document generation, enabling correct identification when the segment identifier is located within a fixed-length record. See Create a New B2B Schema and Fixed Length Payload Support in <i>Using B2B for Oracle Integration 3</i> .	26.01

Feature	Description	Minimum Version
Outbound agreement discovery enhancements	You can now refine outbound agreement selection using Application Partner ID and/or Outbound Agreement Name when multiple outbound agreements exist for the same trading partner and document. This supports scenarios where a partner has multiple departments or B2B identifiers and has to route the same document type to distinct outbound agreements. See Outbound Message Processing in <i>Using B2B for Oracle Integration 3</i> .	26.01
Opaque document standard support for outbound payloads	B2B for Oracle Integration now supports Opaque documents for outbound payloads. This allows you to pass through outbound payloads without schema-based parsing or transformation. See Create a Custom B2B Document Definition in <i>Using B2B for Oracle Integration 3</i> .	26.01

Decisions Features

Feature	Description	Minimum Version
Support for decisions in the export of recipes	You can now export recipes that contain decisions.	26.01

File Server Features

Feature	Description	Minimum Version
Runtime audit history for File Server	The Runtime audit page shows the real-time audit history of runtime file and folder operations in File Server. Learn who updated a file or folder, what changes they made, and when they made the update. This information is helpful for various scenarios, including troubleshooting unplanned changes. Audit history is retained for the retention period of the instance. See Check the Runtime Audit History for File Server in <i>Using Integrations in Oracle Integration 3</i> .	26.01
Enhanced sorting for File Server native action	The list of files returned in the response can be sorted using the following options: • Sort By: Filename, Last Modified Time, Creation Time, Size • Sort Order: ASC, DESC. See Interact with Files in File Server in <i>Using Integrations in Oracle Integration 3</i> .	26.01

Process Automation Features

Starting from 26.01 release, you can view the known issues for Process Automation at Process Automation Issues in *Known Issues for Oracle Cloud Infrastructure Process Automation*.

Feature	Description	Minimum Version
Unified identity application	From this release, all new Process Automation instances that are provisioned through Oracle Integration do not need a Process Automation specific identity application, and instead use Oracle Integration's identity application service. This feature eliminates the need to perform configurations required to access the service and synchronization of role membership. However, existing Process Automation instances created prior to 26.01 version continue to use the Process Automation specific identity application service. See Access the Process Automation Instance in <i>Administering Oracle Cloud Infrastructure Process Automation</i>.	26.01
Reassign tasks in Request Info state	Users with manage permissions can now reassign tasks that are in Request Info state. This feature is helpful in scenarios where users have tasks assigned to them but are on emergency leave. See Reassign a task in <i>Using Oracle Cloud Infrastructure Process Automation</i>.	26.01
Withdraw requests	Process Automation now allows users who have started a task to withdraw the request thus resulting in the termination of the task and withdrawing all the active tasks within the process instance. Users may want to withdraw requests/tasks based on changed circumstances like budget constraints, change of priorities, revised market conditions, duplicate requests, and wrong process flows. On the Tracking page, in the Started by me tab, users can open the tasks where a new Terminate option is available in the Actions dropdown list. Users do not need Manage permissions to terminate tasks. See Withdraw a Task in <i>Using Oracle Cloud Infrastructure Process Automation</i>.	26.01
Updates to the Tracking page	The Tracking page now displays two tabs Started by me and Managed by me that makes it simpler to find process instances. The Started by me tab lists all the process instances that the logged in user initiated. Requesters can view the status of instances that they initiated. The Managed by me tab lists all the process instances for which the logged in user has Manage permissions. See Track Processes in <i>Using Oracle Cloud Infrastructure Process Automation</i>.	26.01
Enable Process Automation instance from Oracle Integration with tags	Service administrators can now use user defined tags to provision Process Automation instances as part of Oracle Integration.	26.01
Set data retention limits in Workspace	You can now set the number of days for which data is retained for process instances that are in Completed or Closed state before it is purged. See Specify Data Management Settings in <i>Using Oracle Cloud Infrastructure Process Automation</i>.	26.01

Feature	Description	Minimum Version
Delete Process Automation from Oracle Integration	In business scenarios such as downgrading to Standard Edition, Service administrators can now remove Process Automation from the Oracle Integration instance. However, this action permanently deletes the process instance and all of the associated data. Re-enabling Process Automation at any time from the same Oracle Integration instance provisions a new process instance with no data from the previous instance. See Disable Process Automation in <i>Administering Oracle Cloud Infrastructure Process Automation</i> and Use Process Automation in <i>Provisioning and Administering Oracle Integration 3</i>.	26.01

Visual Builder Features

Feature	Description	Minimum Version Required
Option to disable Visual Builder	If you want to stop use of Visual Builder and delete the associated instance, you can now disable it. See Use Visual Builder in <i>Provisioning and Administering Oracle Integration 3</i>.	26.01

4

New Features for 2025


Review the new features for 2025.

Topics:

- [New Experience in Oracle Cloud Console](#)
- [September 2025 \(25.10\)](#)
- [June 2025 \(25.06\)](#)
- [April 2025 \(25.04\)](#)
- [February 2025 \(25.02\)](#)

New Experience in Oracle Cloud Console

Oracle Integration is part of a major update to the Oracle Cloud Console. The new experience includes intuitive designs across the console to enhance usability and consistency, with significant updates to resource list pages, resource details pages, and resource creation workflows. For example, you'll see the improved UI when you work with Oracle Integration instances in the console, or when you manage users in OCI Identity and Access Management.

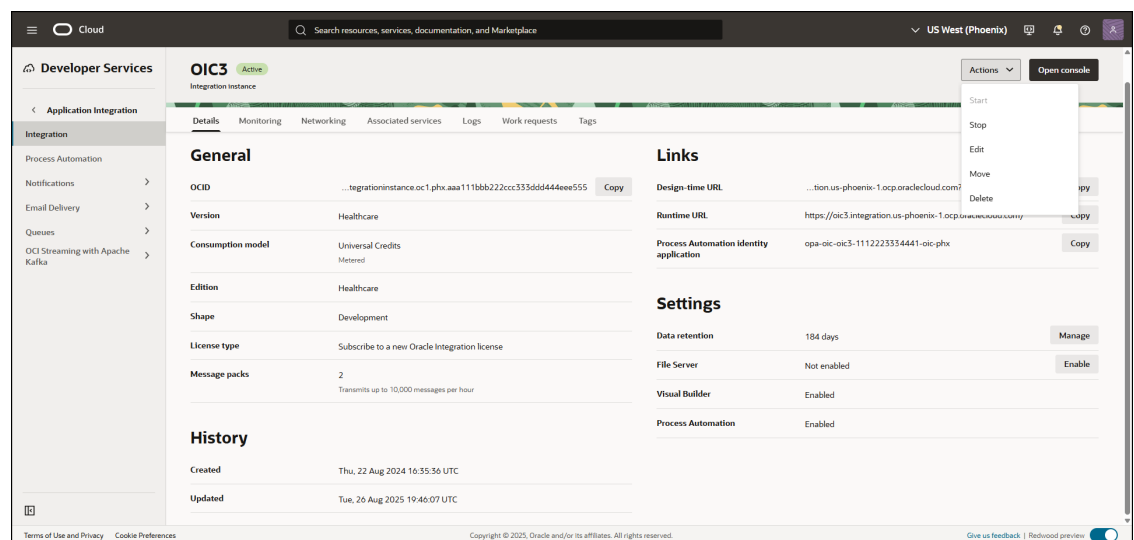

Learn more about the new console experience:

- See [New Console Experience](#) in the OCI documentation.
- See View Instance Details in *Provisioning and Administering Oracle Integration 3*.

September 2025 (25.10)

Common Features

Feature	Description	Minimum Version
Oracle-managed disaster recovery enhancements	Customer-managed custom endpoints are supported. To use this functionality, you must explicitly enable access to customer-managed custom endpoints on the primary and secondary instances prior to performing a failover. See Enable Customer-Managed Custom Endpoints on the Primary and Secondary Instances in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i> .	25.10
Monitor concurrent synchronous requests	There's new documentation describing how to monitor concurrent synchronous requests. The concurrent synchronous request limit is based on the number of message packs you subscribe to for the Oracle Integration instance. To avoid reaching this limit, you can create a custom metrics chart to monitor your requests and set up an alarm to notify you when you approach the threshold. See Monitor Concurrent Synchronous Requests in <i>Provisioning and Administering Oracle Integration 3</i> .	25.10
Send data to ZPR-secured OCI resources	Zero Trust Packet Routing (ZPR) protects sensitive data by enforcing intent-based policies on OCI resources that include security attributes. If your Oracle Integration instance needs to send information to a ZPR-secured OCI resource, your instance must include the appropriate security attributes. When you send data through your private endpoint, your security attributes are included and used to provide access to the ZPR-secured OCI resources based on the ZPR policies. See Assign Zero Trust Packet Routing Security Attributes to Your Instance in <i>Provisioning and Administering Oracle Integration 3</i> .	25.10
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: - India North, Delhi (ONM) - Ireland East, Dublin (ZQO) - Malaysia West, Kulai (FYV) - US Midwest, Des Moines (KQQ) - US Midwest, Shawnee (DRZ) - US South, Dallas (DFW) - US South Central, Abilene (ABL) - US West, Quincy (EEM) - US West, Seattle (NHJ) See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A
Standardized names of APIs	To improve clarity, the names of Oracle Integration APIs and endpoints have been standardized in the documentation. See Explore the Oracle Integration APIs in <i>Securing Oracle Integration 3</i> .	N/A
Improved message pack sizing documentation	There's a new topic to help estimate how many message packs your Oracle Integration instance will use. By correctly sizing your instance based on peak loads, you ensure smooth, scalable, and resilient day-to-day operations for both your real-time transactions and your scheduled batch processing. See Estimate Message Pack Usage for a Metered Tenancy in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A
Updated naming for Oracle Cloud Console	The Oracle Cloud Infrastructure Console has been renamed the Oracle Cloud Console.	N/A

Agentic AI Features

Feature	Description	Minimum Version
Projects as MCP Servers Integrations as agentic AI tools	Register any integration as an agentic AI tool and enable Model Context Protocol (MCP) for the project. You can discover and use integrations as tools from any AI agent framework that supports MCP. See Use Integrations as Tools in an MCP Server in <i>Using Agentic AI in Oracle Integration 3</i> .	25.10
AI Agents	Design and build AI agents to orchestrate integrations into adaptive automation solutions. AI agents autonomously determine which agentic AI tools to use, when, and in which order, to fit your business needs. See Tutorial: Build and Run Your First AI Agent in <i>Using Agentic AI in Oracle Integration 3</i> .	25.10
Human in the loop	Keep a human in the loop in your agentic AI automation solutions to combine the efficiency of AI agents with human oversight and contextual understanding. See Human in the Loop for Agentic AI in Oracle Integration in <i>Using Human in the Loop in Oracle Integration 3</i> .	25.10

Integration and Connectivity Features

Feature	Description	Minimum Version
Create projects using natural language by selecting accelerators or recipes	You can create a project using natural language by selecting an accelerator or recipe that the AI recommends. See Create a Project By Selecting an Accelerator or Recipe that the AI Suggests in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Automatically configure trigger/invoke when creating an integration using AI	When creating an integration using AI, it automatically configures the trigger/invoke by selecting the operation and business object needed for the trigger/invoke based on the natural language text. See Use AI to Create an Integration in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Generate integration documentation	You can use AI to generate documentation about an integration. See Use AI to Generate Integration Documentation in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Generate project documentation	You can use AI to generate documentation about a project. See Use AI to Generate Project Documentation in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Edit integrations using natural language	Use AI to edit an integration by specifying natural language text. See Use AI to Edit an Integration in <i>Using Integrations in Oracle Integration 3</i> .	25.10
AI insights for B2B errors	You can view AI insights for errored B2B messages. The AI-powered summary might help you identify and resolve the issues in the errored B2B messages. See View AI-Powered Summary for Errored B2B Messages in <i>Using B2B for Oracle Integration 3</i> .	25.10
OpenAI Adapter - Chat Completions API support	The OpenAI Adapter supports the Chat Completions API. This API extends compatibility to other LLM vendors, such as Anthropic and Azure that adopt the Chat Completions API. See OpenAI Adapter Capabilities in <i>Using the OpenAI Adapter with Oracle Integration</i> .	25.10

Feature	Description	Minimum Version
Analyze and extract information from images with an Oracle Cloud Infrastructure Vision action	The Oracle Cloud Infrastructure Vision action now enables you to read an image to analyze from an object storage bucket. You can also create an image job, get information about an image job, and cancel an image job. See <i>Analyze and Extract Information from Images with a Vision Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Generate, embed, or rerank text with an Oracle Cloud Infrastructure Generative AI action	The Oracle Cloud Infrastructure Generative AI action now enables you to rerank text (when using dedicated models), embed text (when using on-demand or dedicated models), and chat (when using on-demand or dedicated models). You can also include an image as part of your chat. See <i>Generate, Embed, or Rerank Text with a Generative AI Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Perform text analysis and translation with an Oracle Cloud Infrastructure Language action	The Oracle Cloud Infrastructure Language action now supports masking of personal identifiable information. It can now detect and extract healthcare entities from healthcare records. It now enables you to read documents to analyze from object storage. You can now create, get information about, update, delete, and cancel a language job. You can also list language jobs. See <i>Perform Text Analysis and Translation with a Language Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Synthesize text to speech with an Oracle Cloud Infrastructure Speech action	The Oracle Cloud Infrastructure Speech action now enables you to synthesize text to speech. See <i>Transcribe Speech to Text or Synthesize Text to Speech with a Speech Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Ask questions and receive responses based on current enterprise data with an Oracle Cloud Infrastructure Generative AI Agents RAG action	The Oracle Cloud Infrastructure Generative AI Agents RAG action has been enhanced to simplify operations. See <i>Ask Questions and Receive Answers Based on Current Enterprise Data with a Generative AI RAG Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Oracle Cloud Infrastructure Document Understanding action enhancements	The Oracle Cloud Infrastructure Document Understanding action continues to be enhanced. The latest features enable you to do the following: • Extract information from healthcare insurance IDs • Extract text from plain text files • Classify and return the type of document for a payslip, paycheck, or bank statement • Analyze documents (with a confidence score) • Extract information from tables • Work with multiple languages See <i>Extract Document Information with a Document Understanding Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10
AI-powered error messages for failed integration instances	The error messages generated by AI for failed integration instances have been enhanced to show meaningful error messages and exclude redundant information. These enhanced error messages might help you identify and resolve the issues in the failed instances. See <i>View an AI-Powered Error Message</i> in <i>Using Integrations in Oracle Integration 3</i> .	25.10

Feature	Description	Minimum Version
Use AI to create a trading partner setup	You can now use AI to quickly create a trading partner setup (within a project) based on the natural language text you specify. This feature is available only in the following region: UK South (London) - LHR. See Use AI to Create a Trading Partner Setup in <i>Using B2B for Oracle Integration 3</i>.	25.10
Generate mapping recommendations	You now have an option to generate and use mapping recommendations. Mapping recommendations are generated based on metadata and mapping combinations that are stored in a public mapper repository. This feature is available only in the following region: UK South (London) - LHR. See Generate Mapping Recommendations in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	25.10
Project enhancements	Projects continue to be enhanced: - Export a project asynchronously. This feature enables you to navigate throughout the user interface and perform other tasks instead of having to wait for the export to complete. See Export a Project in <i>Using Integrations in Oracle Integration 3</i>. - Create and share lookups between projects. See Add and Share a Lookup in a Project and Create a Lookup in <i>Using Integrations in Oracle Integration 3</i>. - Take advantage of increased service limits for the number of connections, lookups, JavaScript libraries, deployments, queues, and events. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>. - If you provision the Healthcare edition, the Observe tab now includes increased monitoring functionality: Queues: Monitor the status of queued messages at runtime. MLLP Connections: Monitor the status for inbound and outbound TCP/IP-based MLLP Adapter connections to identify network or system issues that may require human intervention to restore MLLP Adapter connections. See Monitor and Manage Queued Messages at Runtime in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> and Monitor MLLP Adapter Connections and Queues in <i>Using Integrations in Oracle Integration 3</i>.	25.10
View the status of schedule integrations	You can view the status of schedule integrations (for example, paused, no schedule defined, stopped, and started) from the following pages: - From the list of integrations in the Integration section of a project after clicking View all integration(s) at the bottom of the list. - From the list of integrations on the Integrations page available after selecting Design, and then Integration in the left navigation pane. See Integration Page in <i>Using Integrations in Oracle Integration 3</i>.	25.10
Integration Store filtering enhancements	The Integration Store has been enhanced to make it easier to view the available categories of artifacts. - The header bar now shows each artifact category, along with the total number available with each category (All, Accelerator, Recipe, Adapter, Marketplace listing). Click each category to display a card view of available artifacts. - Click the Show Only Updates toggle to show only the latest updates to each category. - The Filter  provides options for Show Only Updates or Show All for the selected category in the header bar. See Find Recipes, Accelerators, Adapters, or Marketplace Listings in <i>Getting Started with Oracle Integration 3</i>.	25.10

Feature	Description	Minimum Version
User name written to audit log	If you view the message payload data in the activity stream of an integration instance in which the tracing level is set to debug or audit, then the time, your user name, and a message indicating that you viewed message payload data are written to the audit log. If the tracing level is set to production, your user name is not logged to the audit log because message payload data is not visible. This behavior occurs whether you access the activity stream in a project or outside a project. See <i>Track Instances in a Project</i> and <i>Track Integration Instances in Using Integrations in Oracle Integration 3</i>.	25.10
Behavioral change when activating a minor version while a major version is active	When activating a minor integration version (for example, 1.0.1) while a major integration version (1.0.0) is still active, all running instances complete with version 1.0.0 and all new requests are handled by version 1.0.1 without aborting the currently-running instances. See <i>Behavior of Running Instances When a Minor Integration Version is Activated in Using Integrations in Oracle Integration 3</i>.	25.10
Extension group support for log and notification actions	You can add extension groups before or after log and notification actions in an accelerator project. The log and notification actions can be either inside or outside of a fault handler. See <i>Extend an Integration Before or After a Log or Notification Action in Using Integrations in Oracle Integration 3</i>.	25.10
Invoke Oracle Integration Generation 2 processes from Oracle Integration 3	If your Oracle Integration Generation 2 instance used processes and was upgraded to Oracle Integration 3, you can invoke a Generation 2 process from Oracle Integration 3. See <i>Invoke a Process from an Integration with a Process Action in Using Integrations in Oracle Integration 3</i>.	25.10
New project deployment activation handles existing active integrations	Activation of a newer accelerator project deployment of an accelerator handles any existing active integrations in the previous project deployment. See <i>Behavior When You Activate an Updated Accelerator Project Deployment with Newer Integration Versions in Using Integrations in Oracle Integration 3</i>.	25.10
Bulk integration reactivation change after a connection change	You can now reactivate 100 active integrations in bulk after a connection change. See <i>Reactivate Integrations after a Connection Update in Using Integrations in Oracle Integration 3</i>.	25.10
Connectivity agent certification	The connectivity agent is now certified on Oracle Linux (OEL) 9. See <i>System Requirements in Using Integrations in Oracle Integration 3</i>.	25.10
Attention! Retirement of Username Password Policy for the Salesforce Adapter	Salesforce plans to retire the Salesforce Username Password Policy security policy with the Summer 2027 release. In the SOAP-based Salesforce Adapter, this policy is not supported for API versions 65 or later, but remains available for versions 31 to 64 until the Summer 2027 release. See SOAP API login() Retirement. SOAP-based Salesforce Adapter customers are strongly advised to upgrade their existing connections to use either the Authorization Code Credentials or Resource Owner Password Credentials security policy. Create any new connections using only these two supported authentication methods moving forward. See <i>Configure Connection Security in Using the Salesforce Adapter with Oracle Integration 3</i>.	N/A

Feature	Description	Minimum Version
Anthropic Adapter - New adapter	The Anthropic Adapter enables you to connect with Anthropic's Claude models, enabling text prompting and tools/function calling for conversational and AI-assisted workflows. See Anthropic Adapter Capabilities in <i>Using the Anthropic Adapter with Oracle Integration 3</i> .	25.10
Oracle Health Inventory Management Adapter - New adapter	The Oracle Health Inventory Management Adapter synchronizes supply data from Oracle Fusion Cloud SCM with the Oracle Health EHR based on a specified schedule. See Oracle Health Inventory Management Adapter Capabilities in <i>Using the Oracle Health Inventory Management Adapter with Oracle Integration 3</i> .	25.10
REST Adapter - mTLS support with the connectivity agent	You can configure connectivity agent-based, mutual transport layer security (mTLS) to access on-premises endpoints with the REST Adapter to access on-premises endpoints through the connectivity agent. See Capabilities When Configuring an Invoke Connection to Consume External REST APIs and Configure Connectivity Agent-Based, mTLS Communication with the REST Adapter in <i>Using the REST Adapter with Oracle Integration 3</i> .	25.10
Salesforce Adapter - Salesforce Application Professional Edition support	The Salesforce Adapter now provides the following capabilities: - Supports external client applications using the Authorization Code Credentials (Salesforce OAuth 3-legged) security policy. - Enables you to switch to either the Salesforce Username Password Policy security policy or the Authorization Code Credentials (Salesforce OAuth 3-legged) security policy as alternatives while using them in the Salesforce Adapter.	25.10
Dynamic connection support with the REST Adapter	You can dynamically update the REST Adapter invoke connection to use at runtime. This feature lets you use a single integration to send requests to multiple endpoints of the same application and eliminates the need to create a separate integration for each endpoint or multiple invoke connections configured in a switch action in a single integration. See Dynamically Update REST Adapter Invoke Connections at Runtime in <i>Using the REST Adapter with Oracle Integration 3</i> .	25.10
PKCE support in OAuth framework for multiple adapters	The REST Adapter, SOAP Adapter, Oracle Fusion Field Service Adapter, Asana Adapter, ArcGIS (ESRI) Adapter, GCP Pub Sub Adapter, GCP Storage Adapter, and FHIR Adapter support use of the PKCE extension. When using three-legged OAuth, PKCE mitigates interception attacks, especially for public clients that cannot securely store a client secret. Upon authorization, the adapter automatically includes the code_challenge and code_challenge_method parameters in the request to the authorization server, ensuring compliance with PKCE-enabled OAuth flows. See Configure Connection Security in <i>Using the REST Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the SOAP Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the Oracle Fusion Field Service Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the FHIR Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the GCP Storage Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i> , Configure Connection Security in <i>Using the ArcGIS (ESRI) Adapter with Oracle Integration 3</i> , and Configure Connection Security in <i>Using the Asana Adapter with Oracle Integration 3</i> .	25.10

Feature	Description	Minimum Version
Oracle Fusion Field Service Adapter - OAuth security policy support	The Oracle Fusion Field Service Adapter now supports the OAuth Authorization Code and OAuth Client Credentials security policies. These enhancements bring the Oracle Fusion Field Service Adapter in line with modern security standards, enabling more secure and flexible integrations. See <i>Configure Connection Security in Using the Oracle Fusion Field Service Adapter with Oracle Integration 3</i> .	25.10
Snowflake Adapter - Client credentials support for other identity providers	The Snowflake Adapter supports OAuth 2.0 Client Credentials authentication using external identity providers such as Azure Active Directory, Okta, and PingFederate. This capability enables secure, token-based access to Snowflake without relying on user-interactive (three-legged) OAuth flows. See <i>Snowflake Adapter Capabilities and Configure Connection Security in Using the Snowflake Adapter with Oracle Integration 3</i> .	25.10
Adobe Sign Adapter - version 6 APIs support	The Adobe Sign Adapter supports Adobe Sign version 6 APIs, which provide improved integration capabilities, increased reliability, and support for digital signature workflows. See <i>Adobe Sign Adapter Capabilities and Action Required: Migrate to Version 6 Endpoints for Adobe Sign Adapter in Oracle Integration 3 in Using the Adobe Sign Adapter with Oracle Integration 3</i> .	25.10
GraphQL Adapter - OAuth Client Credentials and introspection support	The GraphQL Adapter has received the following enhancements: - The OAuth Client Credentials security policy is supported. - A lightweight, nonintrospection query validates authentication regardless of whether introspection is enabled or disabled. See <i>GraphQL Adapter Capabilities in Using the GraphQL Adapter with Oracle Integration 3</i> .	25.10
FTP Adapter - Polling structured payloads	The FTP Adapter supports 100 MB structured payloads for polling. See <i>FTP Adapter Restrictions in Using the FTP Adapter with Oracle Integration 3</i> .	25.10
Microsoft SharePoint Adapter enhancements	The Microsoft SharePoint Adapter adds auto-renewal of subscriptions for change notifications. See <i>Microsoft SharePoint Adapter Capabilities in Using the Microsoft SharePoint Adapter with Oracle Integration 3</i> .	25.10
Oracle E-Business Suite Adapter - Private endpoint support	The Oracle E-Business Suite Adapter can connect to endpoints using a private virtual cloud network (VCN). See <i>Adapters that Support Connecting to Private Endpoints in Using Integrations in Oracle Integration 3</i> .	25.10
Slack Adapter - Trigger support	The Slack Adapter supports trigger connections for receiving Slack events. See <i>Slack Adapter Capabilities in Using the Slack Adapter with Oracle Integration 3</i> .	25.10
Oracle CPQ Adapter - OAuth using JWT User Assertion security policy support	The Oracle CPQ Adapter now supports the OAuth using JWT User Assertion security policy. This security policy is required if you are using Oracle Fusion Applications CPQ. You can also use this security policy if you are using Big Machines (BM) CPQ. See <i>Configure Connection Security in Using the Oracle CPQ Adapter with Oracle Integration 3</i> .	25.10
Attention! Important changes for the SOAP Adapter	Enable MTOM for the SOAP Adapter with ERP endpoints by Release 25.10. Refer here for more information.	N/A

Robotic Process Automation (RPA) Features

Feature	Description	Minimum Version
Update for the recorder plug-in	During the time when Oracle updates production instances to 25.10, an update is going to become available for the recorder plug-in. The Chrome Web Store pushes the update to you, so all you have to do is accept the update and then refresh your browser when prompted. Some features become available only after you install the latest update.	N/A
New action: Frame	A robot can now interact with UI elements that are within an inline frame, including the <code><frame></code> and <code><iframe></code> elements and many pop-ups for accepting or rejecting a website's cookies. Additionally, when a UI element is part of an inline frame, pop-up error text now appears when you target the element using the recorder. If you encounter the error text, stop the recorder and use the low-code tools add a frame action. Then, add actions for interacting with the UI element within the frame action. See Add a Frame Action in <i>Using Robots in Oracle Integration 3</i>.	25.10 and 25.10.2.1 of the recorder plug-in
New action: Alert	A robot can now interact with a browser alert dialog box, including interacting with it and capturing its message. See Add an Alert Action in <i>Using Robots in Oracle Integration 3</i>.	25.10
Improved observability for environment pools	You can now monitor environment pools from within a project. The tools answer a number of questions, including: • Which environment pools are shared between projects? • Do any robot agents need to be updated? • Do any environment pools have queued robot instances? • Are any environments offline in an environment pool? See Monitor Environments and Environment Pools in <i>Using Robots in Oracle Integration 3</i>.	25.10
Run multiple robot agents on an environment	When you run more than one robot agent on a single environment, the robot agents now process requests in parallel. Here's the new process for downloading and starting robot agents: 1. Download the robot agent: No changes to this step. See Download the Robot Agent in <i>Using Robots in Oracle Integration 3</i>. 2. Update the configuration file: No changes to this step. See Update the Robot Agent's Configuration File in <i>Using Robots in Oracle Integration 3</i>. 3. Install and start the robot agent: There's a new procedure for installing the robot agent, as well as new and updated commands for starting it. The command that you've been using to start the robot agent still works for starting a single robot agent. See Install and Start the Robot Agent in <i>Using Robots in Oracle Integration 3</i>.	25.10

Feature	Description	Minimum Version
Improved redundancy in targeting	Oracle Integration now captures multiple selectors for each UI element that you target. When a robot runs, if it can't find the first selector on a web page, the robot attempts to find the second and then third selectors. See <i>View All Selectors for a Locator Field in Using Robots in Oracle Integration 3</i>. Prevalidation is automatically created for all selectors. See <i>Add Validation to a Robot Action in Using Robots in Oracle Integration 3</i>. Note the following: • Not available for web table: This change isn't available for the web table action, which continues to record a single locator for each UI element. • No changes to existing robots: Existing robots continue to work as they did before. However, if you capture a new target in an existing robot, Oracle Integration captures multiple selectors for the UI element. • "Select from various generated selectors" no longer available: Previously, when a robot failed during testing, you could choose a different selector by opening a Settings panel and then selecting Select from various generated selectors. This option is no longer needed and therefore no longer available.	25.10 and 25.10.2.1 of the recorder plug-in
Find robots and their components more easily	Finding the right robot to update is now easier, thanks to a new search field on the Robot page in a project. Simply type your search criteria and press Enter . The Robot page then shows only the robots, environment pools, robot connection types, and robot connections that meet the criteria.	25.10
Improvements to the activity stream	The activity stream for robots has been enhanced to more closely align with the activity stream for integrations, including the following changes: • The data retention policies for robots and integrations are now the same. In <i>Provisioning and Administering Oracle Integration 3</i>, see Component: Robotic Process Automation in the service limits. Scroll to the Service instance data retention row. • When you activate a robot with the Debug tracing level, the tracing level now automatically changes to Production after 24 hours, and most data is removed from the activity stream. Additionally, screenshots now remain in the activity stream for 8 days for production and audit tracing. See <i>Tracing Levels for Robots in Using Robots in Oracle Integration 3</i>. • The activity stream now provides more complete data for debug tracing. For example, the variable that a value is assigned to now appears, and the collection to which an object is appended now appears.	25.10
New function: <code>trim()</code>	A new function removes leading and trailing white space characters: <code>trim()</code> . See <i>Functions in Using Robots in Oracle Integration 3</i> .	25.10
Faster assignment of robot instances	Oracle Integration now assigns robot instances to environments more frequently. This change could reduce the overall running time of robot instances.	25.10

Feature	Description	Minimum Version
Prompt to refresh after installing the recorder plug-in	After you install the recorder plug-in, you no longer need to manually refresh the browser window where Oracle Integration is open. Instead, a refresh dialog now prompts you to refresh the page.	25.10 and 25.10.2.1 of the recorder plug-in

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version
Oracle Integration for Healthcare - Ensure messages are processed in the received order	Oracle Integration for Healthcare ensures that HL7 messages are delivered to target systems in the order received. For example, an ADT_A01 (Patient Admitted) message is received and must be routed to multiple departments in the correct order, such as lab, hospital management, and other departments. See Ensure Messages are Processed in the Received Order in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.10
MLLP Adapter connection monitoring	You can monitor the status for inbound and outbound TCP/IP-based MLLP Adapter connections from the Observe tab in a project. This monitoring helps you identify network or system issues that may require human intervention to restore MLLP Adapter connections. See Monitor MLLP Adapter Connections and Queues in <i>Using Integrations in Oracle Integration 3</i> .	25.10
Unexpected custom HL7 segments are ignored	Custom segments that are not found in the schema are ignored completely and no errors are raised at runtime. See Convert HL7 Messages with a Healthcare Action and Add a New Segment in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.10
Clinical Document Architecture (CDA) document support	You can create and add CDA documents to integrations with the healthcare action. CDA documents are an XML-based standard that provides a structure for encoding, formatting, and exchanging electronic clinical documents. See About Clinical Document Architecture and Create Clinical Document Architecture (CDA) Documents in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.10
HL7 inbound debatch processing support	You can split large message payloads into chunks for processing. See Handle Inbound Debatching of Large HL7 Message Payloads and Convert HL7 Messages with a Healthcare Action in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.10

B2B for Oracle Integration Features

Feature	Description	Minimum Version
New document standard: Opaque	B2B for Oracle Integration now supports scenarios where the inbound payload is unknown or binary with a new document standard Opaque for AS2, AS4, REST and FTP transports. When you use the Opaque document standard, document identification is managed through metadata such as headers or file names, eliminating the need for schema-based content validation. See <i>Create a Custom B2B Document Definition in Using B2B for Oracle Integration 3</i> .	25.10
Multiple transaction support for X12, EDIFACT and X12HIPAA	When creating a document with the X12, EDIFACT and X12HIPAA standard, you can now select if its a single or multiple transaction. This allows you to process a batched backend payload to generate a batched outbound EDI business message. See <i>Create a Custom B2B Document Definition in Using B2B for Oracle Integration 3</i> .	25.10
Use a common URL or endpoint for AS2 transport	The new Use common AS2 URL/Endpoint option, available for AS2 transport within projects in B2B trading partner mode, enables sending and receiving messages through a single AS2 endpoint. This enhancement simplifies partner onboarding, reduces integration overhead, and improves scalability and operational efficiency for large B2B requirements. See <i>Define an AS2 Transport and Manage Connections for AS2 Transport with Common URL or Endpoint in Using B2B for Oracle Integration 3</i> .	25.10
Document sharing across projects	You can create a B2B document and share it across multiple projects. While creating a B2B document within a project, you can do either of the following: - If you want to make the document available to other projects, toggle the Available to other projects button. - If you want to use a shared document, select the Use a shared document check box. All available shared documents are displayed for you to use. See <i>Design B2B Integrations in Projects or in Standalone Environments and Create a Custom B2B Document Definition in Using B2B for Oracle Integration 3</i> .	25.10
Export business and wire messages	You can now export up to 500 business or wire messages at a time as a CSV file. This helps you analyze message interactions, troubleshoot issues, maintain an audit trail of trading partner interactions, and more. See <i>Export Business and Wire Messages in Using B2B for Oracle Integration 3</i> .	25.10
Enhanced delimited payload support	B2B schema payloads now support segment name and composite element delimiters in addition to segment and element delimiters. This enhancement enables you to define clearer and more granular data boundaries in your payloads, minimizing parsing errors and improving data integrity. See <i>Delimited Payload Support in Using B2B for Oracle Integration 3</i> .	25.10

Feature	Description	Minimum Version
Enhanced EDI X12 standards	B2B for Oracle Integration now supports the following EDI X12 standards: 2040 3020 through 3070 See Business Protocols Supported in Oracle B2B in <i>Using B2B for Oracle Integration 3</i> .	25.10
Oracle Integration Artificial intelligence (AI) capabilities	- You can view AI insights for errored B2B messages. The AI-powered summary might help you identify and resolve the issues in the errored B2B messages. See View AI-Powered Summary for Errored B2B Messages in <i>Using B2B for Oracle Integration 3</i>. - You can now use AI to quickly create a trading partner setup (within a project) based on the natural language text you specify. This feature is available only in the following region: UK South (London) - LHR. See Use AI to Create a Trading Partner Setup in <i>Using B2B for Oracle Integration 3</i>.	25.10

Process Automation Features

Feature	Description	Minimum Version
List Process Instances	The sortBy query parameter of the List Process Instances API function now contains a new updateTime parameter. Users can now retrieve records sorted by the updated time. See List Process Instances in <i>REST API for Oracle Cloud Infrastructure Process Automation</i> .	25.10
Roles	The Search Roles by IAM Group Ids API function has been added. This API function gives results that are paginated and can be sorted. See Search Roles by IAM Group Ids in <i>REST API for Oracle Cloud Infrastructure Process Automation</i> .	25.10

Decisions Features

Feature	Description	Minimum Version
Service limits	The service limits for Decisions in Oracle Integration are now documented at Component: Decisions. This topic describes the service limits for decision applications in a project, and service limits for a decision model.	25.10
New video	Watch a quick introduction to decisions, which allows you to define rules to automate decision making and produce predictable results for both integrations and agentic AI.  Video	N/A

Rapid Adapter Builder Features

Feature	Description	Minimum Version
Support for private endpoints	Rapid Adapter Builder now allows you to build adapters that support private endpoints. See Info Properties and Syntax.	25.10

File Server Features

Feature	Description	Minimum Version
New system events	The following activities in File Server now raise system events: - Moving or renaming a file - Moving or renaming a folder See Which Activities in File Server Raise System Events? in <i>Using File Server in Oracle Integration 3</i> . System events were introduced in a previous release; see File Server Features .	25.10
System events are raised from the File server action	A system event is now raised when you perform the following activities using the File server action: - Creating a file - Deleting a file System events were previously available for these activities, but not when you performed them using the File server action.	25.10
System events are visible on tracking and monitoring pages	You can now view information about File Server system events in the following locations: - Within a project on the dependency diagram. - Within a project, on the Observe tab, then the Integrations page, then the Subscriptions tab. - Outside a project, on the Observability page, then the Subscriptions page.	25.10

Visual Builder Features

Feature	Description	Minimum Version Required
Changed upgrade policy	We've expanded the number of runtime versions supported by a visual application from three to four, so you can now publish an app built on the current runtime version and continue developing it in the Designer for the previous four versions. In other words, when updating an app in the Designer, its runtime libraries are supported for about a year, after which you'll be prompted to upgrade. See Upgrade Policy.	n/a

Feature	Description	Minimum Version Required
Notifications	A new Notifications icon in the header now brings up a Notifications panel, where you can view notifications received over the past two days. Use the Notifications panel to easily access all your notifications, especially those that automatically clear after five seconds in the bottom right corner. When you've got unread notifications, the Notifications icon will be badged based on the type of notification received. These notifications also help you better track the status of in-progress tasks. Instead of multiple notifications for related tasks that need some time to complete, you now see a progress bar indicating that the task is running in the background. See Tour the Designer .	n/a
Global functions in a visual application	If your application routinely uses similar JavaScript functions to transform or manipulate data, you can now extract those functions as global functions and reuse them in pages (fragments or any other container). See Add JavaScript Modules As Global Functions .	n/a
Resource optimization by default	The process of sharing or deploying your visual application now automatically optimizes application resources to improve performance; previously, you had to choose to optimize your application. Optimization minifies resources such as stylesheets and HTML and JSON files, and creates RequireJS bundles in an embedded build server. By default, all application resources (except images) continue to be included in an optimized resources bundle, but you can define your own configuration to include and exclude resources as before. The schema used in <code>build.json</code>, however, has changed. See Customize Optimization. Also, if you use Grunt tasks to optimize your application, you must migrate your customizations from <code>Gruntfile.js</code> into <code>build.json</code> as the default optimization configuration will not include your custom configuration. See How to Migrate gruntFile.js Configuration Into build.json. While optimization is recommended to improve your application's performance, you have the option to temporarily disable optimization, say to troubleshoot file access issues that occur because of optimizing your application. See Suppress Optimization.	n/a
Default URL supported for deploying apps mapped to custom endpoints	If you've configured custom endpoints for your Visual Builder instance, you're no longer required to use the instance's custom endpoint URL to deploy apps mapped to the custom endpoint. Now, you can use either the default URL or the custom endpoint URL to deploy your apps with a vanity URL. See Configure Support for a Custom Domain.	n/a

Feature	Description	Minimum Version Required
Business object improvements	- UI changes for business objects In an effort to streamline configuration, a business object's definition now features two new tabs: a Relationships tab for creating and managing relationships, and a Settings tab for configuring general settings and application setup data. The Overview tab, which previously contained these settings, has been removed. Likewise, endpoint settings that were previously under the Overview tab are now in a distinct Settings tab. See View, Create, and Edit Business Object Relationships, Manage Business Object Settings, and Access a Business Object's Resource APIs and Endpoints. - Relationship between business objects based on DB tables It's now possible to create relationships between business objects based on DB tables. When you first create a parent business object, then a child, their relationship is automatically created. For other scenarios, you can create relationships either manually or by adding a referenced field. See Create a Relationship Between Business Objects Based on a DB Table.	n/a
UI changes for backends, service connections	Settings that were previously found on the Overview tab for a backend, service connection, and endpoint, have been moved into a new Settings tab. As a result, the Overview tab has been removed. See Manage Backends in Your Visual Application and Edit a Service Connection.	n/a

Feature	Description	Minimum Version Required
Action Chain enhancements	- Support to call JavaScript action chain from a JSON action chain To help ease the transition to JavaScript-based action chains, you can now call JavaScript actions from your existing JSON actions. See Add a Call Action Chain Action. - Ability to search your action chain diagram The Action Chains editor in Design mode now has a search box at the top of the canvas to help you find text within your action chain. See Create Action Chains in Design Mode. - Auto-populate response data for Call REST action mocks When testing a Call REST action in a chain, VB Studio now automatically sends a request, captures the response, and populates the mock action. All you need to do is enter the required parameters. Previously, the only way to populate mocks for a Call REST action was to manually make a REST call using the Endpoint tab. See Test Action Chains and Create a Test for a Test Case. - Ability to reset dirty data status of specific variables A new Variables to Reset property in the Reset Dirty Data Status action now allows you to reset the dirty status of only the variables you want. See Add a Reset Dirty Data Status Action. - Usability improvements for Run in Parallel, If/Else, Try/Catch, and Switch actions - Run in Parallel: You can add an empty block at the bottom by right-clicking the top-level If node. You can also add an empty block at a specific position by right-clicking any block. See Add a Run In Parallel Action. - Else-If: You can add an empty If or Else-If block at the bottom by right-clicking the top-level If node. Also, you can add an empty Else block before or after an Else-If block, and add an empty Else block before an Else block. See Add an If Action. - Try/Catch: If you accidentally delete a Catch or Finally node in Code view, you can add it back in Design view by right-clicking a Catch node (to add a Finally node) or a Finally node (to add a Catch node). See Add a Try-Catch Action. - Switch: You can add an empty case at the bottom by right-clicking the top-level Switch node. You can also add an empty case at a specific position by right-clicking an existing case. See Add a Switch Action. Additionally, we've changed the drop-zone for all four actions to a more targeted drop-line when you drag an action onto the canvas. - Coverage tab for action chain tests The Tests footer now includes a Coverage tab to display the average coverage of all tests, along with the number of failed and not-run tests, for the visual application, as well as each of its web apps, flows, and pages. See Use the Tests Footer in a Visual Application.	n/a

Feature	Description	Minimum Version Required
Opt for asynchronous event handling	You now have the option to enable asynchronous event handling for components such as editable tables that accept asynchronous event listeners. Async event handling allows the component that fired the event to cancel it asynchronously, if needed—but this functionality is <i>not</i> enabled by default, so you must explicitly enable this behavior for your event listeners. See Enable Asynchronous Handling for Component Events .	
Fragment enhancements	- Support for autowiring fragment events on the parent container Fragments propagate values to the parent container (like a page or a dynamic container) through custom events—but this requires some manual configuration. Now you can use a new Auto Wire Event ID property to automatically wire the event to the fragment's parent container. So when you try to create an event listener on the container where the fragment is used, you'll see the autowired event listed under Fragment Events on the parent container, allowing you to simply select the event and link it to an action chain. See Automatically Wire a Fragment's Custom Event to the Parent Container. - Support to automatically create fragment variables as constants in a container When marking variable or constant input parameters in a fragment to be automatically created in the container that uses the fragment, you can choose to switch one for the other in the container—a constant for a variable, or a variable for a constant—using a new Create As property. This property is useful when fragments accept page-level properties as input parameters whose values are expressions evaluated within the scope of the page. For example, say a fragment defines a title variable whose value is passed from a page based on an expression. If the title is unlikely to change, you can switch the fragment variable to be created as a constant on the page. See Automatically Create and Wire a Fragment Variable on Its Container. - Support for <code>vbDataProviderNotification</code> events The <code>vbDataProviderNotification</code> lifecycle event, triggered by data providers to notify users of errors that occur when something goes wrong during an implicit fetch, is now supported in a fragment. You can use this event to display an error message, for example, when a service data provider makes a REST call to fetch data, but times out for whatever reason. See Define Actions and Events in Fragments.	

Feature	Description	Minimum Version Required
Improvements to dynamic components	- Layout property to control how field groups render in dynamic forms You can now use a layout property to control how grouped fields are rendered in dynamic forms. Use this property to specify whether a group is collapsed by default or not collapsible at all. See Group Fields in Dynamic Form Layouts. - Status indicator on time taken to fetch fields When you open a layout in the rule set editor, you can now access a status indicator to see how quickly the list of available fields is fetched from the service. See Create a Layout for a Dynamic Table or Form. - Improvements to dynamic container editor - The editor for customizing dynamic containers now allows you to add, remove, and change the order of sections directly in the Properties pane when the container has only one rule. For containers with multiple rules, you can open the embedded editor from the Properties pane. - When you add a new rule to a dynamic container, all available container sections are now added by default. You can then remove any sections you don't want to include in the container. See Add a Dynamic Container to a Page.	
Enhancements for fields in a Layout	- Set precedence to override a field's user-specified value You can now use a field property to specify the precedence given to field value input by a user that overrides a field's calculated value. See Specify How a User Input Overrides a Field Value. - Map dynamic form field to global field template If you implemented a global field template for a dynamic form, you can now use the Layout Discriminant property in a layout's Fields tab to choose the global field template that must be applied to a field. See Map a Field to a Global Field Template.	

Feature	Description	Minimum Version Required
Improvements to business rules	- Business rule templates You can now create business rule templates to help users when they create business rules. By providing templates, a user can create a rule from a template and modify it as needed, instead of starting with an empty rule. A template can provide examples of how to configure business rules, for example, how to specify rule conditions, how to write advanced expressions, or how to override properties. Templates themselves are not evaluated. See Create Templates for Business Rules. - Ability to override child field properties When editing business rules, you can now quickly override the properties of all child fields of regions and object fields, instead of setting the property for each child field individually. See Override Field Properties in a Form. - Improved condition builder The condition builder for business rules and validations has been improved to support additional operators. The operators drop-down list now includes "is null", "is not null", "includes", and "does not include". You can now also create conditions that compare the criterion's value to another field's value by selecting a field in the value drop-down list. See Set Conditions for a Rule. You can also edit a business rule to delete expressions used in the condition builder and when overriding the Value property. After removing a condition written as an expression, you can use the basic condition builder to create a condition. See Build Advanced Expressions. - Support for adding messages to read only and required fields You can now include a message text when you set a field to Read Only or Required in a business rule. The message is displayed in the form when the rule is applied. See Override Field Properties in a Form. - Error notifications in business rules editor Business rule editors now display a notification in the status bar to highlight errors that occur when connecting to a service. From the status bar, you can view details about service connection errors, as well as performance issues when fetching data from services.	
Node.js version	Node.js 20 and 22 are the only supported versions for packaging visual applications with Grunt. See Build and Deploy Your Application Using Grunt .	n/a

Feature	Description	Minimum Version Required
Other enhancements	- New Media & Files category The Components palette now includes a Media & Files category, which features the Camera and File Picker components. - New audit severity for showstopper errors A new Stopper severity has been added in the Audits pane to identify showstopper errors that may cause your app to break at runtime. See Audit Application Code. - New option for <code>vb-process-local</code> Grunt command A new <code>additional-locales</code> for the <code>vb-process-local</code> Grunt command now allows you to specify additional locales supported by an application. See Grunt Task - <code>vb-process-local</code>. - Create types from variable objects If your variable uses an object or array as its type, you can now use the Create Type option in the variable's context menu to create a type based on the existing structure of the variable right from the Variables editor. You can also do this for object types on the Types editor. See Create Variables and Create a Custom Object or Array Type. - Test pages in Live view even without context When your page doesn't render in Live view because it's missing context (say, data stored in flow-level variables), you can now provide a mock value in an action chain to allow the page to display correctly. See Preview a Visual Application. - List of Values drop-down in Page Input Parameters dialog It's now possible to display a list of values retrieved from a service (like a REST endpoint) for an input parameter by adding <code>@dt</code> metadata to the variable's JSON and setting subtype to <code>lov</code>. - Help icon with label, description for page input parameters When marking a variable as an input parameter, you can now enter a label and a description to show a Help icon on the Page Input Parameters dialog and improve user experience. Page users can then click the icon to get a more meaningful identifier and some context on how best to set the parameter's value. See Enable Variables as Input Parameters. - Support for the new <code>oj-if</code> component You can now use the <code>oj-if</code> component to conditionally show or hide components in your pages. This component is similar to the <code>oj-bind-if</code> component, but unlike <code>oj-bind-if</code> where the element is not removed from the DOM after bindings are applied, <code>oj-if</code> stays in the DOM and can therefore directly be used as the slot content of a custom element. If you want to conditionally render the content of a slot or if you want the element to stay in the DOM, <code>oj-if</code> is recommended over <code>oj-bind-if</code>. See Use Conditions to Show or Hide Components. - Core Pack component versions for quick start fields If you've enabled Core Pack components in your visual app, you can now choose the Core Pack component version for a field when using quick starts such as the Add Create Page, Add Edit Page, and Add Details Page. This option is also	n/a

Feature	Description	Minimum Version Required
	available in extensions, where the Core Pack version is automatically selected as the component for a field if the component's Legacy version was superseded by the Core Pack version. If the Legacy and Core Pack versions are both available, you can choose to use the Core Pack version. See Use the Create Page Quick Start, Use the Add Edit Page Quick Start, and Use the Add Detail Page Quick Start. - Improved breadcrumbs to view component children, siblings You can now use breadcrumbs in the Page Designer to switch to a component's sibling in the page hierarchy. You can also view its children by hovering over ... at the end of the breadcrumb trail. See Use the Page Designer. - Check a component's details for availability in Components palette It's now easy to identify why a component installed from the Components Exchange doesn't show in the Components palette: Just open the component in the Navigator's Components pane to view its details in the canvas area, then look for the VB Characteristics field. Additionally, deprecated components are now badged Deprecated for easier identification. See Get Components from the Component Exchange.	

June 2025 (25.06)

Common Features

Feature	Description	Minimum Version Required
OCI Generative AI engine available for generating AI descriptions	Four regions now use the OCI Generative AI engine to generate descriptions of components. If your Oracle Integration service instance is located in one of the four regions, your instance now uses the OCI Generative AI engine, even if you previously registered your own AI engine. Learn more: - Learn about the OCI Generative AI Service See Overview of Generative AI Service in the Oracle Cloud Infrastructure Documentation. - See the regions that use the OCI Generative AI engine See AI Feature Availability in <i>Provisioning and Administering Oracle Integration 3</i>. - Explore all AI features in Oracle Integration See AI Innovation and Oracle Integration in <i>Using Integrations in Oracle Integration 3</i>.	25.06

Feature	Description	Minimum Version Required
Oracle-managed disaster recovery enhancements	Integration instances running with polling endpoints (for example, integrations involving Oracle Cloud Infrastructure Streaming, databases, JMS, and others) are automatically activated after failover to the secondary instance. No manual reactivations are required. See <i>What's Supported?</i> in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i> .	25.06
Upcoming billing changes	Billing for Oracle Integration is changing on July 1, 2025. Starting then, using the following features will result in extra message usage: - Disaster recovery - Robotic process automation - Extended data retention These updates are included in our Service Description, which is part of your agreement with Oracle. New billing metrics are available in the Oracle Cloud Console on the Metrics page for an Oracle Integration instance. Review the metrics in these charts to determine how these features contribute to your total usage. If you use any of these features after July 1, 2025, your bill may increase. If you don't want to continue use of these features, disable them before July 1, 2025 to avoid extra message usage. See <i>Viewing Message Metrics and Estimate Message Usage for a Metered Tenancy</i> in <i>Provisioning and Administering Oracle Integration 3</i>.	July 1, 2025
New region availability	Oracle Integration 3 is now available for provisioning in the Indonesia, Batam (HSG) region. See <i>Availability</i> in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. - Generate and Email Patient Report Summary Using OCI AI Services - Sync Process Automation Audit Data to Oracle Autonomous Transaction Processing Approve Invoices Using OCI AI Services Validate ID for Loan Application Using OCI AI Services	25.06

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Oracle Integration Artificial intelligence (AI) capabilities	Oracle Integration continues to enhance its AI capabilities to make tasks easier for you to perform: - Analyze and extract information from images with an Oracle Cloud Infrastructure Vision action in an integration: The Oracle Cloud Infrastructure Vision service uses artificial intelligence to analyze and extract information from images. This service is part of the Oracle Cloud Infrastructure suite of AI services designed to help automate the analysis and extraction of data from images. See <i>Analyze and Extract Information from Images with a Vision Action</i> in <i>Using Integrations in Oracle Integration 3</i>. - Generate text with an Oracle Cloud Infrastructure Generative AI action in an integration: The Oracle Cloud Infrastructure Generative AI service uses artificial intelligence to generate text responses to your requests. It is a fully managed AI service that offers customizable large language models (LLMs) for chat. See <i>Generate Text with a Generative AI Action</i> in <i>Using Integrations in Oracle Integration 3</i>. - Perform text analysis and translation with an Oracle Cloud Infrastructure Language action in an integration: The Oracle Cloud Infrastructure Language service enables you to perform in-depth text analysis and machine translation. You can process unstructured text to perform language detection, text classification, recognition of named entities, key phrase extraction, sentiment analysis, text translation, and detection of personal identifiable information. See <i>Perform Text Analysis and Translation with a Language Action</i> in <i>Using Integrations in Oracle Integration 3</i>. - Transcribe speech to text with an Oracle Cloud Infrastructure Speech action in an integration: The Oracle Cloud Infrastructure Speech service harnesses the power of spoken language by enabling you to easily transcribe human speech into highly exact text transcriptions. See <i>Transcribe Speech to Text with a Speech Action</i> in <i>Using Integrations in Oracle Integration 3</i>. - Ask questions and receive responses based on current enterprise data with an Oracle Cloud Infrastructure Generative AI Agents RAG action in an integration: The Oracle Cloud Infrastructure Generative AI Agents RAG service enables you to query diverse	25.06

Feature	Description	Minimum Version Required
	enterprise knowledge bases and receive context-specific answers based on the current data. See Ask Questions and Receive Answers Based on Current Enterprise Data with a Generative AI RAG Action in <i>Using Integrations in Oracle Integration 3</i>. - Extract information from invoices, receipts, drivers licenses, and passports with an Oracle Cloud Infrastructure Document Understanding action in an integration: The Oracle Cloud Infrastructure Document Understanding action now enables you to read a document to analyze from an object storage bucket. You can also create a processor job, get processor job status, and cancel a processor job. See Extract Document Information with a Document Understanding Action in <i>Using Integrations in Oracle Integration 3</i>. - Use AI to create an integration: Use AI to create an integration based on natural language within a project. Using natural language, you can specify what the integration needs to do in the AI chat box that is available in the integration canvas. See Use AI to Create an Integration in <i>Using Integrations in Oracle Integration 3</i>. - Generate library, healthcare, B2B, and event descriptions: Generate AI-powered descriptions of libraries, HL7 messages, healthcare schemas, custom FHIR resources, B2B trading partners, and events. This capability provides an alternative to manually entering a description, improves productivity, and provides valuable insights to other users. See Create an AI-Powered Library Description and Create an AI-Powered Event Description in <i>Using Integrations in Oracle Integration 3</i>. See Edit or Clone an HL7 Message, Edit or Clone a Healthcare Schema, and Edit a Custom FHIR Resource in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i>. See Create an AI-Powered Trading Partner Description in <i>Using B2B for Oracle Integration 3</i>. - AI-powered error messages are available for failed integration instances: You can view meaningful error messages generated by AI for failed integration instances. These error messages might help you identify and resolve the issues in the failed instances. See View an AI-Powered Error Message in <i>Using Integrations in Oracle Integration 3</i>.	

Feature	Description	Minimum Version Required
Triggers - concurrent requests	For synchronous requests, 100 concurrent requests per message pack are supported, up to a maximum of 2000. For asynchronous requests, 50 requests per message pack are supported, up to a maximum of 1000. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>.	25.06
GitHub repository integration with projects	You can configure access to a GitHub repository from Oracle Integration. This access enables you to export projects and project deployments to a GitHub repository and import then into another Oracle Integration service instance. See Integrate Projects and Project Deployments with the GitHub Repository in <i>Using Integrations in Oracle Integration 3</i>.	25.06
Clone business accelerators without losing the ability to upgrade	You can clone a business accelerator and automatically upgrade the cloned version to the latest version when an updated version of the accelerator is released. See Clone a Project and Upgrade an Accelerator Project and Merge Extensions in <i>Using Integrations in Oracle Integration 3</i>.	25.06
Deployment of decisions	You can create and activate project deployments that include decisions. See Create and Manage a Project Deployment in <i>Using Integrations in Oracle Integration 3</i>.	25.06
Add an extension group before or after a local invocation	You can add an extension group before or after a parent integration that invokes a child integration. See Extend an Integration in an Accelerator Project in <i>Using Integrations in Oracle Integration 3</i>.	25.06
REST Adapter - Identity propagation with Oracle NetSuite	You can propagate the user identity from a REST Adapter trigger connections to Oracle NetSuite with custom JWT claims. This enhancement enables integrations to dynamically pass user-specific credentials (token ID and token secret) to NetSuite securely at runtime. See Propagate User Identity from the REST Adapter to Oracle NetSuite with Custom JWT Claims in <i>Using the REST Adapter with Oracle Integration 3</i>.	25.06
FTP Adapter - Enhancements	The FTP Adapter has received the following enhancements: • Listing files in descending order from the input directory. • Nonschema-based polling of any file up to 1 GB, regardless of format. While providing a schema is still an option, it is no longer required. This provides a broader compatibility with diverse file types. See FTP Adapter Capabilities in <i>Using the FTP Adapter with Oracle Integration 3</i>.	25.06

Feature	Description	Minimum Version Required
Microsoft SharePoint Adapter - New adapter	The Microsoft SharePoint Adapter enables you to create an integration in Oracle Integration that connects to the Microsoft SharePoint application using Microsoft Graph APIs. See Microsoft SharePoint Adapter Capabilities in <i>Using the Microsoft SharePoint Adapter with Oracle Integration 3</i> .	25.06
OpenAI Adapter - New adapter	The OpenAI Adapter enables you to integrate directly with OpenAI's LLMs for advanced content generation, intelligent summarization, contextual classification, and conversation handling. See OpenAI Adapter Capabilities in <i>Using the OpenAI Adapter with Oracle Integration 3</i> .	25.06
GCP Pub Sub Adapter - Bulk AVRO message processing support	The GCP Pub Sub Adapter provides processing of bulk AVRO messages by supporting publishing and pulling in a single request. See GCP Pub Sub Adapter Capabilities in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i> .	25.06
Apache Kafka Adapter - Support for Amazon MSK	The Apache Kafka Adapter can integrate with Amazon Managed Streaming for Apache Kafka (Amazon MSK) using the connectivity agent. See Apache Kafka Adapter Capabilities in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i> .	25.06
Attention! Important changes for the SOAP Adapter	Enable MTOM for the SOAP Adapter with ERP endpoints by Release 25.10. See this blog for more information.	N/A

Robotic Process Automation (RPA) Features

Feature	Description	Minimum Version Required
Set tracing levels when activating a robot	When you activate a robot, you can now set its tracing level. This change gives you improved control over the contents of the activity stream and the performance of the robot. See Activate a Robot in <i>Using Robots in Oracle Integration 3</i> .	25.06
Share environment pools across projects	You can now share environment pools across projects. Therefore, you can run a robot on an environment pool that you create in a different project. With shared environment pools, you can organize your automation solutions in a way that works for your business, while still having the flexibility to choose the right environment pool for each robot to run on. See Create an Environment Pool in <i>Using Robots in Oracle Integration 3</i> .	25.06

Feature	Description	Minimum Version Required
New action: Upload file	A new action is available for uploading files to a web application. See <i>Add an Upload File Action in Using Robots in Oracle Integration 3</i> .	25.06
Create an input of type File	When you define the input for a robot's trigger, you now can create a property of type File. Previously, the only types available for an input were String, Boolean, and Number. See <i>Create a Robot in Using Robots in Oracle Integration 3</i> .	25.06

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version Required
View details of the FHIR profile package	You can expand and view the contents of a FHIR profile package. See <i>Browse the Contents of the FHIR Profile Package in Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.06
Custom FHIR resources support	You can create your own custom FHIR resources, including FHIR heterogeneous bundles. This feature enables you to customize a FHIR resource from the underlying FHIR base schema to use in integrations. FHIR schemas are uploaded as part of a FHIR profile. See <i>Create Custom FHIR Resources in Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.06
Oracle Integration Artificial intelligence (AI) capabilities	You can generate AI-powered descriptions of HL7 messages, healthcare schemas, and custom FHIR resources. This capability provides an alternative to manually entering a description, improves productivity, and provides valuable insights to other users. See <i>Edit or Clone an HL7 Message, Edit or Clone a Healthcare Schema, and Edit a Custom FHIR Resource in Using Oracle Integration for Healthcare in Oracle Integration 3</i> .	25.06

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Schema sharing across projects	You can create a B2B schema and share it across projects. See Design B2B Integrations in Projects or in Standalone Environments and Create a New B2B Schema in <i>Using B2B for Oracle Integration 3</i>.	25.06
Maximize the Track B2B messages page	A Maximize  button on the Track B2B messages page enables you to hide the top section of the page to provide more space for scrolling through transactions. You can return to the original page size by clicking the Minimize  button. See B2B Message Tracking in <i>Using B2B for Oracle Integration 3</i>.	25.06
Schedule trading partner downtime	You can schedule downtime for a trading partner due to expected maintenance or any other reason. During the downtime period, the trading partner cannot process messages. Messages are stored in a pending transmission state in Oracle Integration and resume processing only when the scheduled downtime expires. See Schedule Downtime for Trading Partners in <i>Using B2B for Oracle Integration 3</i>.	25.06

Feature	Description	Minimum Version Required
Enhanced AS2 Adapter activity stream error details	The activity stream has been enhanced for the AS2 Adapter when the following errors occur: - AS2 inbound signing verification failure in standalone mode: The integration instance fails with an Error status at the trigger connection, along with the relevant summary details. - AS2 inbound signing verification failure in trading partner mode: On the Track B2B messages page, the wire message is created with a Transmission Error status. The integration instance fails with an Error status at the trigger connection, along with the relevant summary details. - AS2 inbound decryption failure in standalone mode: The integration instance fails with an Error status at the trigger connection, along with the relevant summary details. - AS2 inbound decryption failure in trading partner mode: On the Track B2B messages page, the wire message is created with a Transmission Error status. The integration instance fails with an Error status at the trigger connection, along with the relevant summary details.	25.06
Enhanced X12 HIPAA version 2.0 standards	B2B for Oracle Integration now supports the following X12 HIPAA version 2.0 standards: 005010X210 006020X314 version 275 See About X12 HIPAA in <i>Using B2B for Oracle Integration 3</i>.	25.06
AS4 transport - Support for pulling outbound messages	You can specify the message partition channel (MPC) value with the Message Partition Channel element in the mapper for the outbound push of an AS4 message. See Specify the Message Partition Channel Value for the Inbound or Outbound AS4 Message in <i>Using the AS4 Adapter with Oracle Integration 3</i>.	25.06
Oracle Integration Artificial intelligence (AI) capabilities	You can generate AI-powered descriptions of trading partners. This capability provides an alternative to manually entering a description, improves productivity, and provides valuable insights to other users. See Create an AI-Powered Trading Partner Description in <i>Using B2B for Oracle Integration 3</i>.	25.06

File Server Features

Feature	Description	Minimum Version Required
New system event for file downloads	Downloading a file in File Server now raises a system event. System events were introduced in a previous release; see File Server Features . See Which Activities in File Server Raise System Events? in <i>Using File Server in Oracle Integration 3</i> .	25.06

Visual Builder Features

Feature	Description	Minimum Version Required
Convert public VB instance to private endpoint	You can now modify a Visual Builder instance to convert a publicly-accessible instance to a private endpoint inside your VCN. See Convert Your Public Instance to a Private Endpoint for the steps on how to convert the instance. Before converting an instance, you will need to complete the items in Prerequisite Steps for Configuring a Private Endpoint.	n/a

April 2025 (25.04)

Common Features

Feature	Description	Minimum Version Required
Announcements banner	You can view announcements in a banner that describe ongoing, completed, and scheduled patching and required user actions for your service instance. See View Announcements About Service Instance Patching and Required User Actions in <i>Getting Started with Oracle Integration 3</i> .	25.04

Feature	Description	Minimum Version Required
Oracle-managed disaster recovery enhancements	Oracle-managed disaster recovery continues to be enhanced: - Access control lists (ACLs) are supported. To use this functionality, you must explicitly enable access control lists on the primary and secondary instances prior to performing a failover. See <i>Enable Access Control Lists (ACLs) on the Primary and Secondary Instances in Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>. - Private endpoints are supported. To use this functionality, you must explicitly create private endpoints on the primary and secondary instances prior to performing a failover. Enable Private Endpoints on the Primary and Secondary Instances in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>.	25.04
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: - UK West, Cardiff (CWL) - UK South, London (LHR) See Availability in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. Sync Data between Azure Storage and PostgreSQL Upon Receiving Notification on Azure Event Grid Create Jira Issues for Exceptions in Integrations Create and Add a User to Multiple Groups in OCI Store and Manage Objects in Amazon Simple Storage Service (Amazon S3) Import Suppliers from File Server to Oracle ERP Cloud	25.04

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Oracle Integration Artificial intelligence (AI) capabilities	Oracle Integration continues to enhance its AI capabilities to make tasks easier for you to perform: - Extract information from invoices, receipts, drivers licenses, and passports with an OIC Document Understanding action in an integration: The Oracle Cloud Infrastructure Document Understanding service uses machine learning and artificial intelligence to process and extract information from documents. This service is part of the Oracle Cloud Infrastructure suite of AI services designed to help automate the extraction, organization, and analysis of data from various types of documents. See <i>Extract Document Information with a Document Understanding Action</i> and <i>Extract Content from an Invoice PDF Document with a Document Understanding Action</i> in <i>Using Integrations in Oracle Integration 3</i>.  Video - Generate an iCal schedule from natural language text: Generate an AI-powered iCal expression for a schedule integration through the use of natural language. This capability provides an alternative to manually entering iCal parameters when defining the schedule. See <i>Define the Type of Integration Schedule to Run</i> in <i>Using Integrations in Oracle Integration 3</i>. - Generate project and lookup descriptions from natural language text: Generate AI-powered descriptions of projects and lookups. This capability provides an alternative to manually entering a description, improves productivity, and provides valuable insights to other users. See <i>Create an AI-Powered Project Description</i> and <i>Create an AI-Powered Lookup Description</i> in <i>Using Integrations in Oracle Integration 3</i>. - Generate a FHIR Adapter search query from natural language text: Define a FHIR search query through the use of natural language. FHIR provides a powerful and flexible search mechanism to retrieve healthcare data from resources using RESTful APIs. See <i>Configure AI search</i> and <i>Create an AI-Generated FHIR Search Query</i> in <i>Using the FHIR Adapter with Oracle Integration 3</i>. - Generate SQL database queries in the Oracle Autonomous AI Transaction Processing (ATP) Adapter: Define a SQL query in the Oracle Autonomous AI Transaction Processing Database through the use	25.04

Feature	Description	Minimum Version Required
	of natural language. See Invoke Select AI for SQL Page and Create an AI-Generated SQL Query in <i>Using the Oracle Autonomous Transaction Processing Adapter with Oracle Integration 3</i> .	
Add a process automation action to an integration	You can invoke process automation from an integration. When you drag the process automation action into an integration, the Process Automation call wizard is invoked and prompts you to select a process application and process to invoke. See Invoke a Process from an Integration with a Process Action in <i>Using Integrations in Oracle Integration 3</i> .	25.04
Add default values in the mapper	You can automatically set a literal value on a target element that has a default value. The Add Default Value option automatically adds the mapping with the default value for the specific element. This capability eliminates the need to manually add a default value by creating a target node and adding the value as a literal string. See Add Default Values in the Mapper in <i>Using the Oracle Mapper with Oracle Integration 3</i> .	25.04
Export and import a project with events	You can export and import a project that includes events to a different instance. See Export a Project and Create or Import a Project in <i>Using Integrations in Oracle Integration 3</i> .	25.04
Dynamic connection support with the connectivity agent	An FTP Adapter invoke connection can be overridden at runtime with an FTP Adapter invoke connection configured with the connectivity agent. See Dynamically Update Invoke Connections at Runtime in <i>Using the FTP Adapter with Oracle Integration 3</i> .	25.04

Feature	Description	Minimum Version Required
REST Adapter and Oracle Fusion Applications Adapters - Identity propagation support	The REST Adapter, Oracle ERP Cloud Adapter, Oracle HCM Cloud Adapter, and Oracle CX Sales and B2B Service Adapter provide support for OAuth identity propagation when invoking REST API operations. OAuth identity propagation enables you to securely transfer the same user identity and access credentials across services. Identity propagation is achieved through use of the <i>OAuth using the JWT User Assertion</i> security policy. The REST Adapter already supports this security policy, which has been enhanced to support identity propagation. With this release, the Oracle ERP Cloud Adapter, Oracle HCM Cloud Adapter, and Oracle CX Sales and B2B Service Adapter now also support use of the <i>OAuth using the JWT User Assertion</i> security policy. See Propagate OAuth User Identity Between Services in <i>Using the REST Adapter with Oracle Integration 3</i>, Propagate OAuth User Identity Between Services in <i>Using the Oracle ERP Cloud Adapter with Oracle Integration 3</i>, Propagate OAuth User Identity Between Services in <i>Using the Oracle HCM Cloud Adapter with Oracle Integration 3</i>, and Propagate OAuth User Identity Between Services in <i>Using the Oracle CX Sales and B2B Service Adapter with Oracle Integration 3</i>.  Video	25.04
Oracle Fusion Applications Adapters - <i>OAuth using the JWT User Assertion</i> security policy support	The Oracle ERP Cloud Adapter, Oracle HCM Cloud Adapter, and Oracle CX Sales and B2B Service Adapter support the <i>OAuth using the JWT User Assertion</i> security policy. JWT assertions enable you to invoke a service provider that does not regard an OAuth client secret as secure. Trust is established with a key pair exchange instead of a client secret. See Configure Connection Security in <i>Using the Oracle ERP Cloud Adapter with Oracle Integration 3</i>, Configure Connection Security in <i>Using the Oracle HCM Cloud Adapter with Oracle Integration 3</i>, and Configure Connection Security in <i>Using the Oracle CX Sales and B2B Service Adapter with Oracle Integration 3</i>.	25.04
REST Adapter - OAuth Custom Two Legged Flow and OAuth Custom Three Legged Flow obfuscation support	To prevent the visibility of sensitive data for the OAuth Custom Two Legged Flow and OAuth Custom Three Legged Flow security policies on the Connections page, four optional fields (security fields 1,2, 3, and 4) have been introduced. You use these optional fields to specify the authorization request, access token request, and refresh token request syntax (for example, <code>&scope=\${security_field_1}</code> or <code>&client_secret=\${security_field_1}</code>). You then define the actual values for these parameters in obfuscated format in the Optional security section. See Data Obfuscation Support and Configure Connection Security in <i>Using the REST Adapter with Oracle Integration 3</i>.	25.04

Feature	Description	Minimum Version Required
Microsoft Office 365 Outlook Adapter - Filtering and paging support	You can specify and control the amount of data returned in a response by selecting query parameters in the Adapter Endpoint Configuration Wizard. You then specify values for these parameters in the mapper. This feature reduces the chance of timeouts. See Request Parameters Page and Implement Common Patterns Using the Microsoft Office 365 Outlook Adapter in <i>Using the Microsoft Office 365 Outlook Adapter with Oracle Integration 3</i>.	25.04
Amazon Simple Queue Service (SQS) Adapter - Inbound polling support	You can configure the Amazon Simple Queue Service (SQS) Adapter for inbound polling to retrieve messages from an Amazon SQS queue at regular intervals. See Amazon Simple Queue Service (SQS) Adapter Capabilities in <i>Using the Amazon Simple Queue Service (SQS) Adapter with Oracle Integration 3</i>.	25.04
Configurable invoke connection retries	You can add automatic retry logic to invoke connections in projects if an invocation failure occurs. When you add retry logic, your invoke connection and its map action are placed inside a while action with default settings for the number of retries and the time between retries. You can update these values. See Add Retry Logic to Invoke Connections in Projects in <i>Using Integrations in Oracle Integration 3</i>.	25.04
Oracle Advanced Queuing (AQ) JMS Adapter - New adapter	The Oracle Advanced Queuing (AQ) JMS Adapter allows connections to Oracle Advanced Queuing (AQ) queues using the Java Messaging Service (JMS). The existing Oracle Advanced Queuing (AQ) Adapter is tightly integrated with PL/SQL, OCI, and JDBC, making it less adaptable for Java-based applications and limiting interoperability with JMS. The new Oracle Advanced Queuing (AQ) JMS Adapter addresses this limitation by offering JMS-compliant APIs, enabling Java applications to leverage standard JMS interfaces. This enhances portability, flexibility, and seamless integration with other JMS-based systems while preserving Oracle AQ's transactional integrity and scalability. See Oracle Advanced Queuing (AQ) JMS Adapter Capabilities in <i>Using the Oracle Advanced Queuing (AQ) JMS Adapter with Oracle Integration 3</i>.	25.04
Oracle Service Cloud (RightNow) Adapter - OAuth 2.0 trigger connection support	The Oracle Service Cloud (RightNow) Adapter supports the OAuth 2.0 security policy for trigger (inbound) connections. See Configure Connection Security in <i>Using the Oracle Service Cloud (RightNow) Adapter with Oracle Integration 3</i>.	25.04

Feature	Description	Minimum Version Required
HubSpot Adapter - Multiple properties acceptance	The Property Change event in the trigger role has been enhanced. You can now configure more than one property for the selected objects. For example, assume you configure Object as Customer, set the Event Type as Property Change, and select properties such as city, country, and address. A change in one or all of the configured properties (city, country, or address) in the HubSpot application triggers the integration. See Trigger Operation Page in <i>Using the HubSpot Adapter with Oracle Integration 3</i>.	25.04
Microsoft Dynamics 365 CRM Adapter - Query filter options support	The Microsoft Dynamics 365 CRM Adapter supports custom query parameters for retrieval and modification tasks on inbound and outbound connections. The Microsoft Dynamics 365 CRM Adapter provides multilevel navigation (\$expand on child entities) support for the Get and Query operations, such as the Filter, Orderby, Navigation, and Select parameters. See Microsoft Dynamics 365 CRM Adapter Capabilities in <i>Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i>.	25.04
Confluent Adapter - Dead letter queuing and mTLS security policy support	The Confluent Adapter has been enhanced: • Support for mutual TLS (mTLS), which enables secure, encrypted communication between clients and servers. • Support for dead lettering, which ensures fault tolerance by forwarding failed messages to a dead letter topic (DLT). Messages with an invalid format are treated as delivery failures and redirected to the DLT for analysis or reprocessing. See Confluent Adapter Capabilities in <i>Using the Confluent Adapter with Oracle Integration 3</i>.	25.04
Shopify GraphQL Adapter - Multidomain support	The Shopify GraphQL Adapter supports multidomain functionality in both the invoke and trigger roles. See Shopify GraphQL Adapter Capabilities and Invoke Dynamic Connections Page in <i>Using the Shopify GraphQL Adapter with Oracle Integration 3</i>.	25.04
FTP Adapter - NLST support	The FTP Adapter supports the NLST feature for legacy system users to ensure seamless inbound polling. See FTP Adapter Capabilities in <i>Using the FTP Adapter with Oracle Integration 3</i>.	25.04

Robotic Process Automation (RPA) Features

Feature	Description	Minimum Version Required
Recorder extension available in Chrome Web Store	You now install the recorder extension directly from the Chrome Web Store, rather than from within Oracle Integration. See Install the Recorder in <i>Using Robots in Oracle Integration 3</i>.	25.04.1

Feature	Description	Minimum Version Required
Extensibility support for RPA components	Accelerator projects now support extensibility for RPA components. You can extend accelerator projects in the following ways: • Invoke a robot from an extension group Create an extension group before or after any invoke connection in an integration. An extension group is required to extend an accelerator in any way. • Create an extension group before or after any robotic process automation action in an integration In the extension group, extend the integration as needed, such as by invoking another robot or adding another supported action. As with all extensibility support, you can upgrade to the latest version of an accelerator without losing any of your RPA extensibility changes. See <i>Extend an Integration in an Accelerator Project</i> in <i>Using Integrations in Oracle Integration 3</i>; scroll to the "Extend an Integration Before or After an Invoke Connection or a Robotic Process Automation Action " and "Add a Robot Flow Action to an Extended Integration" sections.	25.04
Switch to a different window in a robot	A new action, named window, lets you switch to a different window that opens from an application, such as a pop-up window. See <i>Add a Window Action and Use Case: Switch Windows</i> in <i>Using Robots in Oracle Integration 3</i>.	25.04
Pause a robot	A new action, named wait, lets you program a pause into a robot. See <i>Add a Wait Action</i> in <i>Using Robots in Oracle Integration 3</i>.	25.04
New functions	Three new functions are now available: • <code>count()</code> • <code>first()</code> • <code>last()</code> You can include any of these functions in an expression. Use an expression when you define an action in a robot and must update a value. See <i>Functions</i> in <i>Using Robots in Oracle Integration 3</i>.	25.04
Easier to work with tables	Creating an interaction with a table is now a little easier: You can now create a web table definition while you're adding a web table action to a robot. See <i>Add a Web Table Action</i> in <i>Using Robots in Oracle Integration 3</i>.	25.04

Feature	Description	Minimum Version Required
Login action no longer available	The login action is no longer available on the canvas. However, if a robot already contains a login action, the action remains in the robot. Going forward, use following actions in place of the login action: - To enter a user name and password, use the enter text action. - To interact with a sign-in button, use the click element action.	25.04

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version Required
Oracle Integration for Healthcare - Enhanced profile package support	FHIR profile packages have been tested and can be imported into Oracle Integration. If you are unable to successfully import a profile package, see this blog .	25.04
FHIR Adapter - Enhancements	The FHIR Adapter continues to be enhanced. - You can update specific fields of a FHIR resource with the patch interaction when you configure the FHIR Adapter in an integration. See Perform Actions on a FHIR Resource (Create, Read, Update, and more ...) and Update Specific Fields of a FHIR Resource with a Patch Interaction in <i>Using the FHIR Adapter with Oracle Integration 3</i>. - The history, history-type, and vread interactions can be selected for use when you configure the FHIR Adapter in an integration. See Basic Info Page. - Generate a FHIR Adapter search query: You can define an AI-generated FHIR search query through the use of natural language. FHIR provides a powerful and flexible search mechanism to retrieve healthcare data from resources using RESTful APIs. See Configure AI search and Create an AI-Generated FHIR Query in <i>Using the FHIR Adapter with Oracle Integration 3</i>.	25.04

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Resubmit/reprocess in projects	You can resubmit, filter, or view business messages and wire messages in a project. See Work with Wire Messages and Work with Business Messages in <i>Using B2B for Oracle Integration 3</i> .	25.04
Role-based access control support	You can control the users and groups that edit, view, and monitor B2B resources in a project with role-based access control (RBAC). See Design B2B Integrations in Projects or in Standalone Environments in <i>Using B2B for Oracle Integration 3</i> and Control Who Can Edit, View, and Monitor in a Project in <i>Using Integrations in Oracle Integration 3</i> .	25.04

File Server Features

Feature	Description	Minimum Version Required
Simplified file handling using system events	A new type of event is now available in Oracle Integration: a system event. Prior to this release, you had to create and publish an event, and then you could subscribe to it. However, system events are always available to be subscribed to in an event integration, without having to be created or published first. You can subscribe to system events only within a project. The first system events that are available in Oracle Integration are for File Server. Each of the following File Server activities now raises a system event: • Creating a folder • Deleting a folder • Creating a file • Deleting a file Note: A system event currently isn't raised when you create or delete a file using the File server action. All other methods of creating and deleting a file do raise an event. The File Server system events offer significant opportunities for efficiency. For example, you don't need to design an integration that checks for the existence of a file in File Server anymore. Instead, create an event integration that subscribes to the File created system event. The integration then runs whenever a file is created in File Server. You can even filter the events that the integration subscribes to. For a sample use case, see <i>Subscribe to a File Server Event</i> in <i>Using File Server in Oracle Integration 3</i>.  Video	25.04
File signing and verification	You can now use the File server action along with the stage file action to perform file signing and verification. The File server action gets a reference to a file, and the stage file action signs or verifies the file. See <i>Interact with Files in File Server</i> in <i>Using Integrations in Oracle Integration 3</i>.	25.04

Decisions Features

Feature	Description	Minimum Version Required
Decisions support in Oracle Integration	In business workflows, you'll often be required to create decisions that enable you to automate policies, computations, and reasoning. Using Oracle Integration, you can model the decisions for your workflows and drive better outcomes. See Learn About Decision Modeling in <i>Using Decisions in Oracle Integration 3</i>.	25.04.1

February 2025 (25.02)

Common Features

Feature	Description	Minimum Version Required
Robotic process automation (RPA)	A new automation technology is now available within Oracle Integration Enterprise edition: Robots. Just as an integration performs API-based automation, a robot performs UI-based automation. Build a robot when an application doesn't have APIs, when the APIs are inaccessible, or when integration development resources aren't available. RPA is currently available in a number of regions. If you want to start using RPA and it's not available in your region yet, enter a service request. For a list of region availability, see Availability in <i>Provisioning and Administering Oracle Integration 3</i>. To learn more, see the following: • Robot Builder page on the Oracle Help Center. • Learn About Robots and Build a Robot in <i>Using Robots in Oracle Integration 3</i>.  Video  Video  Video	25.02

Feature	Description	Minimum Version Required
Oracle-managed disaster recovery	Oracle-managed disaster recovery continues to be enhanced: - If you are using the default Oracle Integration email tenancy in your primary instance and you fail over to the secondary instance, email notification functionality automatically works the same as in the primary instance. There is no loss of configuration details, including sender, SPF, DKIM, alert, suppression, and customer SMTP information. - Data retention periods set to more than 30 days in the primary instance are propagated to the secondary instance during failover. - Disaster recovery support continues to be added in more regions. See <i>What's Supported?</i> in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i>.	25.02
New billing metrics	Oracle Integration will be moving to a component-usage-based billing model. There are new billing metrics available in the Oracle Cloud Console on the Metrics page for an Oracle Integration instance. These metrics will help you understand your Oracle Integration usage. See Available Metrics Charts in <i>Provisioning and Administering Oracle Integration 3</i>.	25.02
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. Send New Appointment Details from an EMR Application to a Healthcare Provider Send Automatic Replies to Emails with a Specific Subject Using Oracle AI	25.02
Updated video	The Integration Patterns: A First Look video has been updated with new content for Oracle Integration 3.  Video	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Rapid Adapter Builder - Polling triggers	You can now design polling triggers using the Rapid Adapter Builder. See <i>What is a Polling Trigger</i> in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i>.	25.02
Rapid Adapter Builder - New CNCF functions	Several new CNCF functions are now available for use. See <i>Supported Custom CNCF Serverless Workflow</i> in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
Rapid Adapter Builder - OAuth Authorization Code policy update	The OAuth Authorization Code policy has been updated with some improvements. See OAuth Authorization Code Policy in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	25.02
Artificial intelligence (AI)-generated integration descriptions	You can generate AI-powered descriptions of integrations. This capability eliminates the need to manually enter a description, improves productivity, and provides valuable insights to other users. See Create an AI-Generated Integration Description in <i>Using Integrations in Oracle Integration 3</i> .	25.02
Dynamic connection support with the FTP Adapter	You can dynamically update the invoke connection to use at runtime. This feature lets you use a single integration to send requests to multiple endpoints of the same application and eliminates the need to create a separate integration for each endpoint or multiple invoke connections configured in a switch action in a single integration. See Dynamically Update Invoke Connections at Runtime in <i>Using the FTP Adapter with Oracle Integration 3</i> .	25.02
View the instance name and shape in the banner	If you often switch between your development, test, and production instances, it's sometimes not easy to know which instance you're currently in. This information is now visible in an Oracle Integration banner in the format <i>instance_name (shape)</i> .	25.02

[Video](#)

Note

You can't change the shape after you create the instance. However, you can move data to another instance using the export and import features.

See Get Familiar with the Home Page in *Getting Started with Oracle Integration 3*.

Feature	Description	Minimum Version Required
Project enhancements	Projects continue to be enhanced: - You can view all parent and child instances of a particular integration instance. See View the Relationship Between Parent and Child Integration Tracking Instances in a Project in <i>Using Integrations in Oracle Integration 3</i>. - You can create a B2B for Oracle Integration error group in a project and perform lifecycle actions (activate, deactivate, import, export, and delete) on a project deployment that includes B2B documents, schemas, and trading partners. See B2B for Oracle Integration Features. - You can share events across projects. See the row for Oracle Integration event enhancements.	25.02
Oracle Integration event enhancements	Events continue to be enhanced: - You can share events across projects. This capability eliminates the need to create duplicate events across projects. You can also export and import projects that reference event types from other projects and view shared events in the dependency diagram. See Share Events Across Projects in <i>Using Integrations in Oracle Integration 3</i>. - You can use an expression builder to create a filter condition to subscribe to an event in a subscribing integration. This option provides more flexibility when defining subscription filters. See Define Custom Header Filters to Trigger Integrations in <i>Using Integrations in Oracle Integration 3</i>.	25.02
ID generation for polling-based integrations	If Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle AI Database Adapter, and Oracle Database Cloud Service Adapter trigger connection polling fails with errors from the connectivity agent, a failed tracking instance is created and visible on the Errors page.	25.02
Dashboard and Instances page enhancements	The Dashboard and Instances pages continue to be enhanced. - The enforced synchronous and asynchronous request limits are displayed on the Dashboard page. See View the Dashboard in <i>Using Integrations in Oracle Integration 3</i>. - If you are using your own customer email tenancy, no usage metrics are displayed on the Dashboard page. Usage metrics are only displayed if you are using the default email method provided by Oracle Integration. See View the Dashboard in <i>Using Integrations in Oracle Integration 3</i>. - The filter on the Instances page enables you search for instances by their minimum and maximum durations in milliseconds. See Filter the Display of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
Stage file action - Enhancements	The stage file action continues to be enhanced: - File signing and verification support: You can use configured PGP keys to sign content during encryption and verify content during decryption. The following stage file operations have been enhanced: - The Read Entire File operation lets you decrypt content and verify content. - The Write File operation lets you encrypt content and sign content. - The Encrypt File operation lets you sign content. - The Decrypt File operation lets you verify content. The stage file action now matches the features of the FTP Adapter, meaning that the same set of operations are available for interacting with File Server through the native file server action as you have if using the FTP Adapter. - You can optionally select to calculate the size and checksum attribute values for your file in the response mapper with the Get file attributes value on mapper checkbox when configuring the Write File, Zip File, Unzip File, Encrypt File, Decrypt File, and List Files operations. Select this checkbox <i>only</i> if you want to calculate these values. If selected, both attributes are enabled in the response mapper underneath ICSFile. By default, the size and checksum attributes are disabled in the mapper response because calculating the values for both attributes is performance-intensive. See Configure a Stage File Action in <i>Using Integrations in Oracle Integration 3</i>.	25.02
Audit log enhancements	You can select to log both lifecycle actions and observability details to the audit logs (such as runtime messages). See Set the Inactive Session Timeout Limit and Audit Logging Levels in <i>Using Integrations in Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
Email notification enhancements	Email notifications continue to be enhanced: - The daily or hourly report that you configure to receive on the Notifications page now includes the names and versions of any integrations that failed in that time period. The email report shows a maximum of five integrations in table format. Any additional integration failures can be viewed by clicking the View Errors button in the email, which opens the Errors page in Oracle Integration. See <i>Configure Notification Emails in Using Integrations in Oracle Integration 3</i>. - If you are using the default email tenancy provided with Oracle Integration, the number of daily promotional emails you can receive has been reduced to 100. This reduction does not apply if you are using your own customer tenancy.	25.02
RabbitMQ Adapter - New adapter	The RabbitMQ Adapter enables you to create an integration in Oracle Integration that connects to a RabbitMQ messaging system. The RabbitMQ Adapter connects to the RabbitMQ distributed publish-consume messaging system from Oracle Integration and allows for the publishing and consuming of events from RabbitMQ exchanges/queues. See <i>RabbitMQ Adapter Capabilities in Using the RabbitMQ Adapter with Oracle Integration 3</i>.	25.02
Asana Adapter - New adapter	The Asana Adapter elevates project management and collaboration by enabling direct integration with the Asana platform, offering CRUD operations, OAuth 2.0 authentication, and support for personal access tokens (PAT). See <i>Asana Adapter Capabilities in Using the Asana Adapter with Oracle Integration 3</i>.	25.02
Microsoft Dynamics 365 CRM Adapter - Trigger connection support	The Microsoft Dynamics 365 CRM Adapter supports trigger (inbound) connections, enabling real-time, event-driven workflows. See <i>Microsoft Dynamics 365 CRM Adapter Capabilities Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i>.	25.02
GCP Pub Sub Adapter - Support for additional sample payloads	The GCP Pub Sub Adapter provides connectivity agent support to enhance secure, private network connections for invoke operations using JWT User Assertion security policies. See <i>GCP Pub Sub Adapter Capabilities in Using the GCP Pub Sub Adapter with Oracle Integration 3</i>.	25.02
GCP Storage Adapter - Security policy updates	The GCP Storage Adapter supports the Authorization Code Credentials security policy for public gateway access and the JWT User Assertion security policy for connecting with publicly accessible resources (direct connectivity over public internet) and private resources using the connectivity agent. See <i>GCP Storage Adapter Capabilities in Using the GCP Storage Adapter with Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
ArcGIS (ESRI) Adapter - Inbound support	The ArcGIS (ESRI) Adapter supports inbound connections for both the ArcGIS Online and ArcGIS Enterprise products. The trigger functionality in ArcGIS Online supports the OAuth Authorization Code and HMAC security policy. ArcGIS Enterprise supports the API Key Validation security policy. ArcGIS Online supports multipoint, polyline, and polygon geometries along with point type for geographic information. ArcGIS Enterprise supports point, polyline, and polygon geometries. See ArcGIS (ESRI) Adapter Capabilities in <i>Using the ArcGIS (ESRI) Adapter with Oracle Integration 3</i>.	25.02
Amazon Simple Queue Service (SQS) Adapter and Amazon Simple Notification Service (SNS) Adapter - AVRO sample payload support	The Amazon Simple Queue Service (SQS) Adapter and Amazon Simple Notification Service (SNS) Adapter are enhanced across trigger and invoke connections to publish and subscribe to messages in AVRO schema format, in addition to the current support for JSON and XML formats. See Amazon Simple Queue Service (SQS) Adapter Capabilities in <i>Using the Amazon Simple Queue Service (SQS) Adapter with Oracle Integration 3</i> and Amazon Simple Notification Service (SNS) Adapter Capabilities in <i>Using the Amazon Simple Notification Service (SNS) Adapter with Oracle Integration 3</i>.	25.02
Salesforce REST Adapter - Bulk (V2) query support	The Salesforce REST Adapter enables you to query bulk data. You can now use Bulk CRUD to modify a large data set and Bulk Query to retrieve a large data set. See Salesforce REST Adapter Capabilities in <i>Using the Salesforce REST Adapter with Oracle Integration 3</i>.	25.02
Apache Kafka Adapter - Enhancements	The Apache Kafka Adapter has received the following enhancements: - Multiple offsets and ranges: You can control message processing by defining multiple offsets and ranges. For example, you can process the first message, fourth message, and all messages from nine to fifteen by specifying offsets such as 1-1, 4-4, 9-15. - Reset to a specific offset or start from the beginning: You can reset the consumer to a specific offset (partition-specific) or rewind to the beginning of the partition. See Apache Kafka Adapter Capabilities in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
Shopify GraphQL Adapter - Company events support	The Shopify GraphQL Adapter supports the Order Returns module, along with new business events (Company Create, Company Update, and Company Delete) within the Customers module. These enhancements enable you to add and modify company details and return fulfilled orders using the Order Returns module. See <i>Shopify GraphQL Adapter Capabilities in Using the Shopify GraphQL Adapter with Oracle Integration 3</i>.	25.02
Oracle Enterprise Performance Management Cloud Adapter - OAuth support	The Oracle Enterprise Performance Management Cloud Adapter provides support for the OAuth Resource Owner Password Credentials security policy. See <i>Create a Connection to Oracle Enterprise Performance Management Cloud and Task Manager in Using the Oracle Enterprise Performance Management Cloud Adapter with Oracle Integration 3</i>.	25.02
Oracle Utilities Adapter - JWT client and user assertions support	JWT client and user assertions with OAuth Client Credentials are supported with the following security policies: • OAuth Client Credentials using JWT Client Assertion security policy • OAuth using JWT User Assertion security policy See <i>Oracle Utilities Adapter Capabilities in Using the Oracle Utilities Adapter with Oracle Integration 3</i>.	25.02
Adapter Certification updates	The following adapters have been certified with additional application versions: • Apache Kafka Adapter • Microsoft SQL Server Adapter • MySQL Adapter • Oracle Advanced Queuing (AQ) Adapter • SAP Adapter • SAP Concur Adapter • Shopify Adapter • Shopify GraphQL Adapter For details, see the Connectivity Certification Matrix.	25.02

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version Required
Oracle Integration for Healthcare - Enhanced profile package support	For this release, the following FHIR profile packages have been tested and can be imported into Oracle Integration: • FHIR Canadian • FHIR Australian • FHIR UK • FHIR iSiK The list of supported profile packages continues to grow. See Import FHIR Profile Packages in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i> for the complete list. If you are unable to successfully import a profile package not shown in this list, see this blog.  Video	25.02

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Project enhancements	Project support for B2B for Oracle Integration continues to be enhanced. • You can create an error group in a project. Error groups allow you to select specific errors to ignore during EDI translation at runtime. See Configure Error Rules for EDI Translation in <i>Using B2B for Oracle Integration 3</i>. • You can perform lifecycle actions (activate, deactivate, import, export, and delete) on a project deployment that includes B2B documents, schemas, and trading partners. You can also search on projects in the standalone Wire messages and Business messages tabs available by selecting Observability, then B2B tracking. See Design B2B Integrations in Projects or in Standalone Environments in <i>Using B2B for Oracle Integration 3</i> and Create and Manage a Project Deployment in <i>Using Integrations in Oracle Integration 3</i>.	25.02

Feature	Description	Minimum Version Required
Publish B2B tracking data to OCI Logging	You can use the public logging service features of Oracle Cloud Infrastructure to collect and manage B2B business messages and wire messages. See Publish B2B Business and Wire Messages to the Oracle Cloud Infrastructure Logging Service in <i>Using B2B for Oracle Integration 3</i> and Capture the Activity Stream of Integrations in the Oracle Cloud Console in <i>Provisioning and Administering Oracle Integration 3</i>.	25.02
Outbound EDI batch file processing	You can configure batching for outbound EDIFACT and X12 documents as part of trading partner setup. Batching enables you to group messages by document type and send them as a batch. For example, you may want to send a batch of X12 purchase orders or EDIFACT invoices. See Configure Batching for Outbound EDI X12 and EDIFACT Documents in <i>Using B2B for Oracle Integration 3</i>.  Video	25.02
AS4 Adapter - Message partition channel value support	You can specify the message partition channel (MPC) value for the outbound AS4 message. MPCs allow for the partitioned transfer of AS4 messages between AS4 exchange participants. MPCs are used for both pushed and pulled messages. One MPC is used for a single message exchange between two participants. See Specify the Message Partition Channel Value for the Outbound AS4 Message in <i>Using the AS4 Adapter with Oracle Integration 3</i>.	25.02
AS2 Adapter - File size increase	The AS2 Adapter now supports file sizes of up to 100 MB. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>.	25.02

File Server Features

Feature	Description	Minimum Version Required
Optimized deletion of large files	The process of deleting a large file (500 MB or larger) has been optimized. Deleting large files is now faster than ever.	25.02

Feature	Description	Minimum Version Required
New documentation for allowlisting patterns	New documentation is available for File Server allowlisting patterns, including a pattern that doesn't require you to add the CIDR block for the service gateway to the File Server allowlist. See File Server Patterns for Allowlisting in <i>Using File Server in Oracle Integration 3</i> .	N/A

5

New Features for 2024

Review the new features for 2024.

Topics:

- [October 2024 \(24.10\)](#)
- [August 2024 \(24.08\)](#)
- [June 2024 \(24.06\)](#)
- [April 2024 \(24.04\)](#)
- [February 2024 \(24.02\)](#)

October 2024 (24.10)

Common Features

Feature	Description	Minimum Version Required
Monitoring pagination limit	The maximum number of integration instances shown on the Instances and Errors pages and returned by the monitoring REST API now defaults to 50 instances. This value can be overridden. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i> .	24.10.3
Oracle-managed disaster recovery	Failover is the process in which a secondary (standby) instance takes over when the primary working instance fails. Oracle provides a disaster recovery solution that allows you to fail over quickly from natural or human disasters and provide business continuity in your secondary instance. This feature is available to users in the Ashburn and Phoenix commercial regions for newly provisioned, production instances. Oracle manages nearly all disaster recovery responsibilities automatically for you. Your administrative responsibilities are minimal. Data synchronization between the primary and secondary instances occurs automatically in near real time to minimize data loss. See Introduction to Oracle-Managed Disaster Recovery and What's Supported? in <i>Configuring an Oracle-Managed Disaster Recovery Solution for Oracle Integration 3</i> .  Video	24.10.2

Feature	Description	Minimum Version Required
Extended data retention	By default, Standard and Enterprise edition instances retain data for 32 days, and Healthcare edition instances retain data for 184 days. If you have an Enterprise edition instance, you can change the data retention period if you want. See Edit the Data Retention Period for an Instance in Provisioning and Administering Oracle Integration 3.	24.10.2
Oracle-managed custom endpoints	A custom endpoint enables access to your Oracle Integration instance with your own hostname, instead of the original instance URL generated in the Oracle Cloud Console. You can now create an <i>Oracle-managed</i> custom endpoint so you don't have to procure and manage the public certificate for your custom host name, Oracle will do it for you. See Configure a Custom Endpoint for an Instance in Provisioning and Administering Oracle Integration 3.  Video	24.10.2
New guide: <i>Securing Oracle Integration 3</i>	A security guide is now available for Oracle Integration. See Overview of Oracle Integration Security in Securing Oracle Integration 3.	N/A
Visual Builder Studio - Continuous integration/continuous delivery (CI/CD) publishing	Visual Builder Studio 25.01 supports CI/CD publishing for integrations in Oracle Integration 3. See Move Oracle Integration Artifacts, Packages, and Lookups Between Instances in Using Visual Builder Studio, Authorize VB Studio to Access Visual Builder and Integration Instances in Administering Visual Builder Studio, and Add an Oracle Integration Instance to an Environment in Using Visual Builder Studio.	N/A

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Copy Objects from OCI Object Storage to Microsoft SharePoint • Create Users in OCI Identity and Access Management for Persons in PeopleSoft • Manage Objects in OCI Object Storage • Sync Salesforce Accounts with Oracle CX Sales and Oracle ATP • Fetch Data in Chunks from Oracle ATP • Handle Throttling Using Parking Lot Pattern • Import Oracle Commerce Cloud Orders to Oracle Intelligent Advisor Interviews • Sync Oracle NetSuite Customers with Oracle CX Sales and B2B Service Accounts • Import Orders from Oracle ERP Cloud to Oracle Autonomous Data Warehouse • Import Customers and Credit Card Transactions from SAP ASE (Sybase) to Oracle Unity • Create Accounting Journals in Oracle Accounting Hub • Create Customers in Shopify for Salesforce Accounts • Sync JIRA Issues with GitHub • Import Files from File Server to OCI Object Storage	24.10
Notice about deprecated ciphers	For a list of the affected ciphers, see TLS Cipher Suites Support in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A
New YouTube channel	We have a new YouTube channel, where you can view our live demos— Oracle Integration YouTube channel . We'll be adding new content regularly, so be sure to subscribe to keep up with the latest videos.	

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Attention! Important changes for the Shopify Adapter and SAP Concur Adapter	• Shopify recommends that you transition from REST APIs to GraphQL APIs by February 1, 2025. This recommendation means that integrations must now use the GraphQL APIs. To accommodate this transition, use the new Shopify GraphQL Adapter. Refer here for more information. • Transition to SAP Concur V4 endpoints because some V3 endpoints are planned for decommission. Refer here for more information.	N/A

Feature	Description	Minimum Version Required
Rapid Adapter Builder - Guidelines for Oracle partners	Detailed guidelines for Oracle Partners on how to build adapters using the Rapid Adapter Builder are now available. See Guidelines for Oracle Partners in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	24.10
Project enhancements	Projects have received the following enhancements: - You can create B2B for Oracle Integration integrations in projects. See B2B for Oracle Integration Features. - You can print the dependency diagram. You can also search on dependencies in the report summary. See View the Dependent Relationships Between Project Resources in <i>Using Integrations in Oracle Integration 3</i>. - You can extend integrations in accelerator projects by adding lookups and libraries. See Extend an Integration in an Accelerator Project in <i>Using Integrations in Oracle Integration 3</i>.	24.10
Active/passive connectivity agent support	Active/passive connectivity agent support is provided. When two connectivity agents run in the same connectivity agent group, one agent is always active and receives the requests, while the other agent is in standby mode and does not receive any requests. If the active agent goes down, the standby agent becomes active and begins handling all requests. See Create an Agent Group in <i>Using Integrations in Oracle Integration 3</i> .	24.10
Activation/deactivation enhancements	A new design-time state called Deactivation Failed is introduced for partial deactivations of integrations. When deactivation fails, you retry the deactivation again. See Deactivate an Integration in <i>Using Integrations in Oracle Integration 3</i> .	24.10
Private endpoint support for multiple adapters	You can configure the Shopify GraphQL Adapter and Microsoft Dynamics 365 CRM Adapter to connect to endpoints using a private virtual cloud network (VCN). See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i> .	24.10
REST Adapter - Heterogeneous JSON arrays support	Heterogeneous JSON array support is provided in the REST Adapter. In JSON, an array is an ordered collection of values that can be of various data types. Heterogeneous arrays are collections of disparate types. See Heterogeneous JSON Array Support in <i>Using the REST Adapter with Oracle Integration 3</i> .	24.10
Microsoft Dynamics 365 CRM Adapter - New adapter	The Microsoft Dynamics 365 CRM Adapter integrates seamlessly with CRM modules such as sales and customer service, providing an optimal navigation experience and user interface. See Microsoft Dynamics 365 CRM Adapter Capabilities in <i>Using the Microsoft Dynamics 365 CRM Adapter with Oracle Integration 3</i> .	24.10

Feature	Description	Minimum Version Required
Shopify GraphQL Adapter - New adapter	The Shopify GraphQL Adapter provides easy access to Shopify applications through the GraphQL API, supporting event notifications, data operations, query generation, and enhanced security policies. See Shopify GraphQL Adapter Capabilities in <i>Using the Shopify GraphQL Adapter with Oracle Integration 3</i> .	24.10
FTP Adapter - Enhancements	The FTP Adapter introduces schema-based polling and enhanced file listing features for more refined file management: - Inbound polling: You can specify the path of the source directory and schema of the files to consider while polling. You can also specify the directory that does not take part in polling. - NLST support: The List Files operation provides a list of only the file names and the corresponding directory names. See FTP Adapter Capabilities and Invoke Operations Page in <i>Using the FTP Adapter with Oracle Integration 3</i> .	24.10
Apache Kafka Adapter - Debatching support	The Apache Kafka Adapter provides debatching support for trigger operations, giving you more control over message dequeuing from topics. You can specify how many messages are processed per tracking instance, whether individually or in groups. This enhancement improves flexibility in managing message flow in Kafka integrations. See Topic & Partition Page in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i> .	24.10
Oracle Advanced Queuing (AQ) Adapter - XML and XSD archive	The Oracle Advanced Queuing (AQ) Adapter supports sample XML and XML schema for enriched message structures. See Oracle Advanced Queuing (AQ) Adapter Capabilities in <i>Using the Oracle Advanced Queuing (AQ) Adapter with Oracle Integration 3</i> .	24.10
Amazon Simple Queue Service (SQS) Adapter - Dead letter support and opaque schema support	The Amazon Simple Queue Service (SQS) Adapter supports the opaque (stream reference) feature for handling various file formats. Dead letter support is also provided. See Amazon Simple Queue Service (SQS) Adapter Capabilities in <i>Using the Amazon Simple Queue Service (SQS) Adapter with Oracle Integration 3</i> .	24.10

Feature	Description	Minimum Version Required
Microsoft Entra ID Adapter - Support for extension and custom security attributes	The Microsoft Entra ID Adapter supports the following attributes for flexible metadata management: - Extension attributes: Manage up to 15 extension attributes (<code>extensionAttributes1</code> to <code>extensionAttributes15</code>) for user objects, allowing storage of additional organization-specific information. - Custom security attributes: Define and manage up to 500 custom security attributes with support for strings, integers, and booleans, offering flexibility for user categorization and other custom scenarios. See <i>Azure Active Directory Adapter Capabilities in Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	24.10
Amazon Simple Notification Service (SNS) Adapter - Opaque schema support	The Amazon Simple Notification Service (SNS) Adapter supports the opaque (stream reference) feature for handling various file formats. See <i>Amazon Simple Notification Service (SNS) Adapter Capabilities in Using the Amazon Simple Notification Service (SNS) Adapter with Oracle Integration 3</i>.	24.10
Azure Event Grid Adapter - Opaque schema support	The Azure Event Grid Adapter supports the opaque (stream reference) feature for handling various file formats. See <i>Azure Event Grid Adapter Capabilities in Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	24.10
GCP Pub Sub Adapter - Opaque schema support	The GCP Pub Sub Adapter supports the opaque (stream reference) feature for handling various file formats. See <i>GCP Pub Sub Adapter Capabilities in Using the GCP Pub Sub Adapter with Oracle Integration 3</i>.	24.10
SAP Concur Adapter - v4 API support	The SAP Concur Adapter supports v4.0 Swagger APIs for GET operations on the Identity APIs module.	24.10
ArcGIS (ESRI) Adapter - Outbound support	The ArcGIS (ESRI) Adapter supports ArcGIS Online (AGOL) and the OAuth security policy for secure public gateway access. See <i>ArcGIS (ESRI) Adapter Capabilities in Using the ArcGIS (ESRI) Adapter with Oracle Integration 3</i>.	24.10

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version Required
Oracle Integration for Healthcare - Enhancements	Oracle Integration for Healthcare has received the following enhancements. - You can import FHIR profile packages into Oracle Integration and select the resource definitions in that profile when configuring the FHIR Adapter. Support for FHIR profile packages is available both inside of projects and in standalone environments (outside of projects). The US Core profile package is supported. See <i>Import FHIR Profile Packages in Using Oracle Integration for Healthcare in Oracle Integration 3</i>. - You can filter audit logs by resource type and fetch unique audit operations from audit records. - FHIR resource extensions are supported. - You can convert a package that includes healthcare resources to a project. - Role-based access control (RBAC) is supported for healthcare resources in a project.	24.10
FHIR Adapter - FHIR profile packages support	You can select an imported FHIR profile package when you configure the FHIR Adapter in an integration. See <i>Add the FHIR Adapter Connection to an Integration</i>.	24.10
MLLP Adapter - Active/passive connectivity agent support	The MLLP Adapter supports an active/passive connectivity agent setup. When two connectivity agents run in the same connectivity agent group, one agent is always active and receives the request, while the other agent is in standby (passive) mode and does not receive any incoming requests. If the active agent fails, the standby agent becomes active and begins handling all requests. See <i>Configure an Agent Group in Using the MLLP Adapter with Oracle Integration 3</i>.	24.10

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Projects support	B2B for Oracle Integration is available in projects. You can design B2B schemas, documents, trading partners, and integrations using the B2B action inside projects. See Design B2B Integrations in Projects or in Standalone Environments and Tour of the Projects Workspace in <i>Using Integrations in Oracle Integration 3</i>.	24.10
AS4 transport support	The AS4 transport is supported in B2B for Oracle Integration. Applicability Statement 4 (AS4) is an open standard for the secure exchange of B2B documents using web services. Secure document exchange is governed by WS-Security, including XML encryption and XML digital signatures. The payload is considered agnostic, meaning the document type (purchase order, invoice, or others) is not tied to a defined SOAP action or operation. See AS4 in <i>Using B2B for Oracle Integration 3</i> and AS4 Adapter Capabilities in <i>Using the AS4 Adapter with Oracle Integration 3</i>.	24.10
Ignore errors during runtime translation	You can select specific errors to ignore during EDI translation. You create a group of errors to ignore and associate that group with inbound/outbound trading partner agreements. These errors are ignored if encountered during runtime translation. See Configure Error Rules for EDI Translation in <i>Using B2B for Oracle Integration 3</i>.	24.10

File Server Features

Feature	Description	Minimum Version Required
Optimized deletion of large files	The process of deleting a large file (1 GB or larger) has been optimized. Deleting large files is now faster than ever.	24.10

August 2024 (24.08)

Common Features

Feature	Description	Minimum Version Required
Healthcare edition available for provisioning	Oracle Integration now includes a Healthcare edition for installation. The Healthcare edition is a complete integration and business automation solution for integrating business and health data using a single enterprise connectivity and automation platform. Using the Healthcare edition, you can quickly modernize applications, business processes, APIs, and data using industry standards such as HL7 and the latest advances in healthcare interoperability, such as Fast Healthcare Interoperability Resources (FHIR). See Oracle Integration for Healthcare Features and Oracle Integration Editions and Create an Oracle Integration Instance in <i>Provisioning and Administering Oracle Integration 3</i>.	24.08.1
New region availability	Oracle Integration 3 is now available for provisioning in the Saudi Arabia Central, Riyadh (RUH) region. See Availability in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A
Service limits increase for concurrent synchronous limit	A maximum of 600 concurrent synchronous requests are supported. Users receive 100 concurrent requests per message pack. This concurrent request increase is useful if you have high concurrency requirements in respect to synchronous integration executions. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>.	24.08
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Create Oracle CPQ Transactions for Oracle Intelligent Advisor Interviews  Video • Import Products from Salesforce to Shopify  Video • Create Products in Magento Commerce Cloud and QuickBooks for Oracle ERP Cloud Items • Import Contacts from Oracle ATP to Oracle Responsys • Sync Salesforce Accounts with Workday Customers	24.08
Notice about deprecated ciphers	Oracle recently sent an email announcement about discontinuing support for deprecated TLS ciphers, planned for October 2024. If your organization uses any of the deprecated TLS ciphers, please replace them with a supported cipher as soon as possible. For a list of the affected ciphers, see TLS Cipher Suites Support in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Rapid Adapter Builder - design time debugging	While configuring adapters built using the Rapid Adapter Builder, you can now view the execution logs of background flows in design time. See <i>Debug Integration Flows in Design Time in Using the Rapid Adapter Builder with Oracle Integration 3</i>.	24.08
Project enhancements	Projects have been enhanced: • Oracle Integration for Healthcare is supported in projects. You can create HL7 messages and schemas in projects. You can then select the HL7 message when configuring the healthcare action in an integration in the Integrations section of the project. • The resources for Integrations and Healthcare are separated and accessible from a vertical navigation pane on the project details page. The resources within each section can be refreshed separately. • The Share and Details sections that were previously visible on the details page for a project are now accessible by clicking the Share  and Edit Details  icons, respectively. Project export functionality is now available by clicking the Export  icon. The View dependencies  icon has been moved to the center of the page. See <i>Tour of the Projects Workspace in Using Integrations in Oracle Integration 3</i>.	24.08
Dependency diagram enhancements	The project dependency diagram has been enhanced: • A summary report shows information about the dependent resources in the current project, the dependent resources being used in other projects, the unused dependent resources, and the dependent resources being used that are not in projects. • Integrations that are shareable with other projects are identified by a green circle and integrations that are not shareable with other projects are identified by a green square. • You can access the dependency diagram of remote projects. • You can drill down into lookups to identify their usage by the specific action in an integration (for example, a log action). • You can view multiple minor versions of integrations. See <i>View the Dependent Relationships Between Project Resources in Using Integrations in Oracle Integration 3</i>.	24.08

Feature	Description	Minimum Version Required
Retain the Enable payload validation option	When you select the Enable payload validation option during integration activation, it remains set by default if you later deactivate and reactivate the integration. This eliminates the need to reselect this option every time an integration is deactivated and reactivated. See <i>Activate an Integration in Using Integrations in Oracle Integration 3</i>.	24.08
Suppression list enhancement	The suppression list lets you refresh each individual email address to see its current state. You can also see the date on which an email sent to that email address was last suppressed. See <i>Remove Email Addresses from the Suppression List in Using Integrations in Oracle Integration 3</i>.	24.08
Custom headers and filtering in event integrations	You can define custom headers in events, select those events and map request payload elements to the custom headers when creating a publishing integration, and then define filters on those headers when creating a subscribing integration. If the filter condition defined is satisfied at runtime, the subscribing integration is triggered. If the filter condition is not satisfied, the integration is not triggered. See <i>Define Custom Header Filters to Trigger Integrations in Using Integrations in Oracle Integration 3</i>.	24.08
Activity stream enhancements	The activity stream has been enhanced: - The duration is only shown for specific activities. See <i>Track the Status of Integration Instances in Using Integrations in Oracle Integration 3</i>. - New messages are shown in the activity stream for adapters created with the Rapid Adapter Builder. See <i>Track the Status of Integration Instances in Using Integrations in Oracle Integration 3</i>.	24.08
Audit trail improvements	The audit trail has been enhanced: - You can click Download filtered in a project to download records for the currently-selected filters that you configured with the Filter  icon option. - On the Audit page both inside a project and outside a project, you can specify a date range that is greater than 32 days in the Filter . - The project ID is included in the audit logs. - When you download logs in the activity stream, the Oracle Cloud identifier (OCID) value of your service instance is included in the logs. See <i>View the Design-Time Audit Log of a Project, Track Instances in a Project, and Check the Audit History for an Integration or Other Component in Using Integrations in Oracle Integration 3</i>.	24.08

Feature	Description	Minimum Version Required
Refresh endpoints in the integration canvas of projects	You can refresh endpoints inside the integration canvas of projects. See Refresh Endpoints of an Integration in a Project in <i>Using Integrations in Oracle Integration 3</i> .	24.08
Private endpoint support for multiple adapters	You can configure the Oracle Intelligent Advisor Adapter, Oracle Utilities Adapter, Oracle Fusion Field Service Adapter, Oracle Responsys Adapter, and Oracle Service Cloud (RightNow) Adapter to connect to endpoints using a private virtual cloud network (VCN). See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i> .	24.08
REST Adapter and Rapid Adapter Builder - Enhancements for OpenAPI documents	The OpenAPI document allOf, oneOf, and anyOf patterns defined as items of a top level array schema are supported. OpenAPI documents with external references are also supported for both HTTP and HTTPS-based URLs. See Support of Polymorphic Constructs for OpenAPI Connectivity and Support for OpenAPI Documents with External References in <i>Using the REST Adapter with Oracle Integration 3</i> .	24.08
ArcGIS (ESRI) Adapter - New adapter	The ArcGIS (ESRI) Adapter (short for Arc Geographical Information System) enables you to integrate an ArcGIS Enterprise application that exposes data by ArcGIS services with Oracle Integration. The ArcGIS (ESRI) Adapter enables you to integrate on-premises applications, which expose ArcGIS REST APIs, with Oracle Integration using the connectivity agent. The ArcGIS (ESRI) Adapter performs CRUD operations (create, update, delete, and query) on the feature service module and supports the ArcGIS Generate Token flow as a security policy. See ArcGIS (ESRI) Adapter Capabilities in <i>Using the ArcGIS (ESRI) Adapter with Oracle Integration 3</i> .	24.08
Amazon Simple Notification Service (SNS) Adapter - New adapter	The Amazon Simple Notification Service (SNS) Adapter integrates with Amazon's Notification system, specifically Amazon SNS topics. The Amazon Simple Notification Service (SNS) Adapter enables you to create integrations in Oracle Integration that connect to the Amazon SNS distributed publish-subscribe messaging system. The Amazon Simple Notification Service (SNS) Adapter supports both publishing and subscribing to messages from Amazon SNS topics. See Amazon Simple Notification Service (SNS) Capabilities in <i>Using the Amazon Simple Notification Service (SNS) Adapter with Oracle Integration 3</i> .	24.08

Feature	Description	Minimum Version Required
Salesforce REST Adapter - Attachment and bulk support	The Salesforce REST Adapter includes the following enhancements: - Attachment download: Downloads attachments from Salesforce either by using a record identifier or a URL. This operation can be performed on only those business objects that support BLOB fields. - Bulk data operations (V2): Support bulk operations (create, update, upsert, and delete) on all Salesforce business objects. Also, you can get the status of these operations in the form of successful/failed/unprocessed records from Salesforce to Oracle Integration. See Salesforce REST Adapter Capabilities in <i>Using the Salesforce REST Adapter with Oracle Integration 3</i>.	24.08
Apache Kafka Adapter	You can now connect to Azure Event Hub, enabling seamless integration and expanded possibilities for your enterprise. The Apache Kafka Adapter now also supports two new SASL OAuth policies: - Client Credentials - Client Credentials using JWT Client Assertion See Apache Kafka Adapter Capabilities in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i>.	24.08
Oracle Service Cloud (RightNow) Adapter - Event Delivery Service support	The Event Delivery Service represents an Cloud Events 1.0 format event to which you subscribe when configuring the Oracle Service Cloud (RightNow) Adapter in the trigger (source) direction. The event should be configured in the Oracle Service Cloud (RightNow) application to deliver the event to Oracle Integration. The events of standard and custom objects are supported in Event Delivery Service configuration. See Oracle Service Cloud (RightNow) Adapter Capabilities in <i>Using the Oracle Service Cloud (RightNow) Adapter with Oracle Integration 3</i>.	24.08
Snowflake Adapter - Connectivity agent support	The Snowflake Adapter allows connections to application endpoints using a connectivity agent in addition to public gateways, enhancing security and flexibility. See Snowflake Adapter Capabilities in <i>Using the Snowflake Adapter with Oracle Integration 3</i>.	24.08
Oracle Advanced Queuing (AQ) Adapter - Enhancements	The Oracle Advanced Queuing (AQ) Adapter supports the following features: - Sample JSON and AVRO schemas for the message structure, in addition to the existing XML schema. - Priority, Expiration, and CorrelationID standard headers for enqueueing operations on the wizard page and dequeueing operations at the mapper level. - Editable polling frequency for dequeue operations. See Oracle Advanced Queuing (AQ) Adapter Capabilities in <i>Using the Oracle Advanced Queuing (AQ) Adapter with Oracle Integration 3</i>.	24.08

Feature	Description	Minimum Version Required
Coupa Sourcing Adapter and Coupa Procurement Adapter - Enhancements	The Coupa Sourcing Adapter and Coupa Procurement Adapter now support advanced pagination, robust query and filter parameters, and detailed record fetching. See Coupa Sourcing Adapter Capabilities in <i>Using the Coupa Sourcing Adapter with Oracle Integration 3</i> and Coupa Procurement Adapter Capabilities in <i>Using the Coupa Procurement Adapter with Oracle Integration 3</i>.	24.08
GCP Pub Sub Adapter - Dead letter and opaque schema support	The GCP Pub Sub Adapter supports a dead lettering feature to ensure reliable message handling by forwarding the unacknowledged (undelivered or unprocessed) messages to a designated dead letter topic and holding them. This feature provides robust fault tolerance and easier recovery for your real-time messaging applications. The GCP Pub Sub Adapter also supports an opaque schema, which enables you to publish, subscribe, and pull the files belonging to any format through the specified topic. See GCP Pub Sub Adapter Capabilities in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i>.	24.08
Azure Service Bus Adapter - Subscribe to existing topic subscriptions	The Azure Service Bus Adapter enables you to create a new subscription or utilize an existing one. Once the integration is activated, a list of all active subscriptions that have been created within a topic on the Azure Service Bus portal is available to users in Oracle Integration. See Azure Service Bus Adapter Capabilities in <i>Using the Azure Service Bus Adapter with Oracle Integration 3</i>.	24.08
Adapter Certification updates	- The Coupa Procurement Adapter and Coupa Sourcing Adapter are certified on the R39 May Release 2024. - The Workday Adapter is certified with HCM and Financials, Versions 28 to 42.2. - The eBay Marketplace Adapter is certified with Browse API v1.19.7, Finances API v1.17.2, Inventory API 1.17.5, Marketing API v1.22.0, and Metadata API : v1.8.0. See Connectivity Certification Matrix.	24.08

Oracle Integration for Healthcare Features

Feature	Description	Minimum Version Required
Oracle Integration for Healthcare	Oracle Integration for Healthcare provides support for common healthcare standards and protocols. Oracle Integration for Healthcare enables you to create integrations that interact with healthcare organizations that use HL7 and FHIR. See Introduction to Oracle Integration for Healthcare in <i>Using Oracle Integration for Healthcare in Oracle Integration 3</i>.  Video	24.08.1
MLLP Adapter - New adapter	The MLLP Adapter provides native transport protocol support for Health Level 7 (HL7) messages in Oracle Integration. MLLP is a TCP/IP protocol used to transport HL7 messages between applications. See MLLP Adapter Capabilities in <i>Using the MLLP Adapter with Oracle Integration 3</i>.	24.08.1
FHIR Adapter - New adapter	The FHIR Adapter enables you to create an integration between a Fast Healthcare Interoperability Resources (FHIR) application server and Oracle Integration. The FHIR Adapter is similar to the REST Adapter, but with a FHIR-specific configuration experience. You can configure the FHIR Adapter as an invoke connection in an integration in Oracle Integration. See FHIR Adapter Capabilities in <i>Using the FHIR Adapter with Oracle Integration 3</i>.	24.08.1

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Supported X12 versions	Versions 3010 and 3060 of the X12 business protocol are supported. See Business Protocols Supported in B2B for Oracle Integration in <i>Using B2B for Oracle Integration 3</i>.	24.08
Improved diagnosability for AS2 transactions	Error messages in the logs of wire messages have been improved.	24.08

File Server Features

Feature	Description	Minimum Version Required
Audit history available for UI actions	Actions that you perform in the File Server user interface are now captured in the Design Time Audit. Previously, only design-time operations appeared. See Check the Audit History for an Integration or Other Component in <i>Using Integrations in Oracle Integration 3</i> .	24.08

Process Features

The following table lists the Process features that are now supported in Oracle Integration 3 in August 2024.

Feature	Description
Human tasks - previousSwimLaneParticipant	Assign the task to the previous assignee in the same lane
Human tasks - Action rules	Define certain actions as unavailable
Business objects - Business exceptions	Throw custom errors during a flow, as well as catch them in error subprocesses

Visual Builder Features

Feature	Description	Minimum Version Required
Dark theme for web apps	When you create a <i>new</i> web app using the default template, you can now customize the app's theme to show components against a dark background, instead of the default light background with dark text. You can even let your users choose between a Light and Dark theme. CSS variables to override the default Redwood look and feel are still supported—only now you make those overrides in the CSS files specific to the Light and Dark theme. See <i>Customize a Web App's Appearance</i> .	n/a

Feature	Description	Minimum Version Required
Opt-in for Core Pack components	Core Pack components, available under the Early Access category in the Components palette since 24.04, now require an opt-in if you want to use them in your application's pages. If you use these Core Pack components in your app, take note that Core Pack does not support theming at this time. The only way to theme your app is to roll back Core Pack usages in your app to Legacy components and re-implement your application. If you don't ever plan to theme your app, you can choose to enable Core Pack components in the Components palette for use in your app's pages. See Opt In to JET Core Pack Components.	n/a
Business rules	Business rules, which control the logic that determines what's displayed on the page at runtime, are now available for all extensions as well as visual applications. See Use Business Rules With Your Rule Sets.	n/a
Enhanced variable and type creation	We've optimized the process of creating multiple variables and types, so each variable or type is generated with a default name. You'd then use the Properties pane to update the name and other properties as needed. See Create Variables and Create Types. With this update, the ability to create a custom type that defines a list of enumeration values is deprecated. Instead you can create a variable, then use the Subtype option in the variable's Design Time tab to define your enumerated list. See Create Variables.	n/a

Feature	Description	Minimum Version Required
Enhancements for JavaScript action chains	• Actions within custom code You can now drop an action between single line and block statements in custom code, functionality that can improve productivity. Additionally, you can also take advantage of code completion in a Code action's Properties pane. See Add a Code Action. • Shorthand syntax for variables, constants, functions in current scope When you create a new JavaScript action chain or add actions to an existing chain, the underlying code now uses shorthand syntax, by default, to retrieve the value of variables, constants, and functions defined in the current scope. So for a page, where previously the syntax was <code>\$page.variables.myvar</code> or <code>\$page.functions.myfunc</code>, you'll now see <code>\$variables.myvar</code> or <code>\$functions.myfunc</code> instead in your action chain. • Duplicate option in JS action chains You can now duplicate an action, or a code block within an If, Switch, or Run in Parallel action. See Create Action Chains in Design Mode as well as Add an If Action, Add a Switch Action, and Add a Run In Parallel Action.	n/a

 Note

The option to toggle between JSON and JavaScript action chains in the Action Chains tab is no longer available. This change does not impact existing JSON action chains, which you can continue to edit—but all new action chains default to JavaScript. Further, you can no longer create new tests for JSON action chains, though

Feature	Description	Minimum Version Required
	 existing tests will continue to run.	
New dirtyDataStatus property in vbBeforeExit payload	If you track changes in a variable's state to detect unsaved changes, you can now use the vbBeforeExit event listener's dirtyDataStatus payload (instead of the Get Dirty Data Status action) to check whether navigating away from a page will result in the tracked variable losing its data. See Add a Get Dirty Data Status Action.	n/a
Dependent fragment property for display	When curating fragment properties for display in the Properties pane, you can now use an item's Dependent On field in the Design Time tab to specify other items that this item depends on for its data. This way, when the fragment is used on a page or container, the dependent item won't show in the Properties pane until the other items have their value. See Section Fragment Properties for Display in the Properties Pane.	n/a
Upgrade support for imported resources	Resources that are using an older set of runtime dependencies when your app is imported can now be made compatible with the app's current runtime version. See Upgrade Imported Resources.	n/a
Option to select existing field for M:1 and 1:1 business object relationships	A new and improved editor is now available when you create many-to-one and one-to-one relationships between business objects. Besides other improvements, the editor gives you the option of creating a new field as the referenced key (default), or selecting an existing field of the correct type. See Create a Many-To-One or One-To-One Relationship. Many-to-many relationships continue to use the existing editor, now without the ability to change cardinality. A new + Many to Many Relationship option is also added to a business object diagram's context menu.	n/a

Feature	Description	Minimum Version Required
Usability improvements	- Application Name field renamed The Application ID specified when you create or duplicate an application is now Application Name. Also, what used to be Application Name is now Application Display Name. With this change, the app's display name, name, and ID are displayed on the Settings editor, so you can pick the correct value when building REST URLs for cURL commands. See Create a New Visual Application, Create a Copy of an Application, and Manage Visual Application Settings. - New Select Variable icon in the Properties pane The Select Variable icon in the Properties pane has been changed to better represent the variable picker. You'd now click  (instead of  previously) to select a variable. - Listener shortcut on the Events editor You can now use a shortcut to create a listener when you're working with custom events in the Events editor, instead of switching to the Events Listener editor. Simply select the new Create Event Listener option in an event's right-click menu to create a new event listener in the same scope as the event. See Create Event Listeners for Events.	n/a

June 2024 (24.06)

Common Features

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the Singapore West (XSP) region. See <i>Availability in Provisioning and Administering Oracle Integration 3</i> .	N/A

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Sign and Verify Messages Using OCI Vault • Import Worker Data from an FTP Server to Oracle HCM Cloud • Import Employee Records from an FTP Server to Oracle HCM Cloud • Sync Project Details from Oracle Primavera Cloud to PostgreSQL Using Amazon SQS • Export Campaign Data in Bulk from Snowflake to Salesforce Marketing Cloud Using GCP Storage •  Video • Import Orders from Zuora to a Hasura Supported Database •  Video • Export Employee Images from Oracle HCM Cloud to an FTP Server • Import Purchase Orders from Oracle JD Edwards EnterpriseOne to Oracle ERP Cloud • Sync Oracle Siebel Employees with Oracle Field Service Technicians • Create Invoices in Oracle ERP Cloud Using OCI Document Understanding AI Service	24.06
OCI Logging Analytics	If you use the public logging service capabilities of Oracle Cloud Infrastructure to collect and manage the activity stream of integrations, note that the following data is now published to the activity stream service logs: • Replayed parent instance ID • Instance completion state • Parent event ID See Details for Integration 3 and Capture the Activity Stream of Integrations in the Oracle Cloud Console in <i>Provisioning and Administering Oracle Integration 3</i>.	24.06
Additional instances are ready for upgrade	The following instances can now be upgraded to Oracle Integration 3: If you're actively using Process in a Oracle Integration Generation 2 production environment, Oracle can't automatically migrate you to Process Automation during the upgrade to Oracle Integration 3, but you can now perform the migration manually so that you can upgrade to Oracle Integration 3. See <i>Migrate Actively Used Process Applications to Oracle Integration 3</i> in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A
Upgrade documentation improvements	The upgrade documentation has been reorganized and clarified to improve usability. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Rapid Adapter Builder - OpenAPI updates	Using the VS Code extension for Rapid Adapter Builder, you can now update an adapter definition document with new requests from an OpenAPI document. See Add Functionality to an Adapter Definition Document in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	24.06
Rapid Adapter Builder - Adapter bundle updates	The VS Code extension for Rapid Adapter Builder now supports creating and importing of adapter bundles. See Create or Import Adapter Bundles in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	24.06
Rapid Adapter Builder - New security policies for invoke connections	The Rapid Adapter Builder now supports OAuth JWT User Assertion and OAuth JWT Client Assertion security policies for invoke connections. See OAuth JWT User Assertion and OAuth JWT Client Assertion in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	24.06
Event support in projects	You can perform the following event-based tasks in a project: 1. Create an event. 2. Publish the event in an integration. 3. Subscribe to the event in an event integration. You can also export a project that includes events, clone a project that includes events, and monitor subscribed events in a project from the Observe tab and from the globally-available Subscriptions page under Observability outside of a project. See Create Publish, and Subscribe to Events in a Project and View Subscribed Instances in a Project in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Increase in active integrations limit	The limit on the number of active integrations per service instance has increased from 700 to 800. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i> .	24.06
Increase in string size limit	The string size limit of 10,000 characters is enforced. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i> .	24.06
Debug tracing level reset after 24 hours	After 24 hours, the Debug (Not recommended) tracing level is automatically reset to Production. See Activate an Integration and Service Limits in <i>Provisioning and Administering Oracle Integration 3</i> .	24.06
Active integration count by project on the Dashboard page	You can view the total number of application, schedule, and event integrations in projects by clicking the Active integrations link on the Dashboard page. See View the Dashboard in <i>Using Integrations in Oracle Integration 3</i> .	24.06

Feature	Description	Minimum Version Required
View the dependencies between project resources	You can view the dependencies between the resources (integrations, connections, lookups, JavaScript libraries, and events) in a project. See View the Dependent Relationships Between Project Resources in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Exit canvas during integration activation	When you test an integration in the canvas, you can perform other actions both inside and outside of the canvas while the activation is in progress. See Test Integrations from Inside the Integration Canvas in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Refresh endpoints using connection sharing	You can override a local connection in a draft state with a configured, globally-available connection and then refresh the endpoints for the local connection. See Add and Share a Connection Across a Project in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Import event-based integrations into a project	You can import integrations that publish and subscribe to events. Importing a publishing integration into a project also imports the event. The event becomes visible in the Events section of the project details page. See Create, Import, or Copy an Integration into a Project in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Extensibility support for the stage file action	You can add an extension group before a stage file action configured <i>only</i> to write to a file. The write to file operation includes a map action. As an example use case, you may want to extend your integration with a data stitch action. See Extend an Integration in an Accelerator Project in <i>Using Integrations in Oracle Integration 3</i>.	24.06
Notification email enhancements	- A new level of email address verification has been added on the Notifications page. When you enter an approved sender email address and click Save on the Notifications page, a verification code is sent to the address. You must enter the code received by that email address on the Notifications page. Upon successful verification, status is changed to Verified. See Configure Notification Emails in <i>Using Integrations in Oracle Integration 3</i>. - The suppression list shows the list of suppressed emails by default. You can browse or search the list for addresses to remove. See Remove Email Addresses from the Suppression List in <i>Using Integrations in Oracle Integration 3</i>. - The number of emails sent per the enforced limit includes both successful and failed messages. See View the Dashboard in <i>Using Integrations in Oracle Integration 3</i>.	24.06

Feature	Description	Minimum Version Required
View the execution times of iterations in looping actions in the activity stream	You can view the overall time a looping action (for example, a while action or a for-each action) took to execute all its iterations. You can also expand the looping action to view the ten slowest iterations and their times to execute. See <i>Track the Status of Integration Instances in Using Integrations in Oracle Integration 3</i>.	24.06
Project deployment page redesign	The project deployment page has been redesigned to make it easier to use. See <i>Create and Manage a Project Deployment in Using Integrations in Oracle Integration 3</i>.	24.06
Private endpoint support for multiple adapters	You can configure the SAP Ariba Adapter, SAP S/4HANA Cloud Adapter, Oracle Advanced Queuing (AQ) Adapter, Salesforce REST Adapter (inbound direction), and Salesforce Adapter (SOAP-based) to connect to endpoints using a private virtual cloud network (VCN). See <i>Adapters that Support Connecting to Private Endpoints in Using Integrations in Oracle Integration 3</i>.	24.06
Coupa Procurement Adapter - New adapter	The Coupa Procurement Adapter is specifically designed to optimize procurement workflows. The Coupa Procurement Adapter supports outbound invoke connections of modules such as Purchase Orders, Requisitions, Contracts, and more. The Coupa Procurement Adapter also supports custom headers and attachments. See <i>Coupa Procurement Adapter Capabilities in Using the Coupa Procurement Adapter with Oracle Integration 3</i>.	24.06
Oracle Aconex Cloud Adapter - New adapter	The Oracle Aconex Cloud Adapter enables you to set up a connection with Oracle Aconex. You can configure the Oracle Aconex Cloud Adapter as an invoke connection in an integration. See Aconex Adapter Capabilities in <i>Using the Oracle Aconex Cloud Adapter with Oracle Integration 3</i>.	24.06
Amazon Simple Queue Service (SQS) Adapter enhancements	The Amazon Simple Queue Service (SQS) Adapter supports the connectivity agent and XML messages. See <i>Amazon Simple Queue Service (SQS) Adapter Capabilities in Using the Amazon Simple Queue Service (SQS) Adapter with Oracle Integration 3</i>.	24.06
Amazon Simple Storage Service (S3) Adapter	The Amazon Simple Storage Service (S3) Adapter provides improved security through use of the connectivity agent. See <i>Amazon Simple Storage Service (S3) Adapter Capabilities in Using the Amazon Simple Storage Service (S3) Adapter with Oracle Integration 3</i>.	24.06
REST Adapter and Rapid Adapter Builder - Polymorphic construct support	The REST Adapter and Rapid Adapter Builder support the anyOf polymorphic construct in OpenAPI documents. See <i>Support of Polymorphic Constructs for OpenAPI Connectivity in Using the REST Adapter with Oracle Integration 3</i>.	24.06

Feature	Description	Minimum Version Required
GraphQL Adapter - Header and custom security policy support	The GraphQL Adapter supports the Basic Authentication security policy and custom request and response headers. See GraphQL Adapter Capabilities in <i>Using the GraphQL Adapter with Oracle Integration 3</i> .	24.06
IBM MQ Series JMS Adapter - JSON payload support	The IBM MQ Series JMS Adapter provides support for JSON payloads. The IBM MQ Series JMS Adapter is also certified on IBM MQ Cloud with the connectivity agent. See IBM MQ Series JMS Adapter Capabilities in <i>Using the IBM MQ Series JMS Adapter with Oracle Integration 3</i> .	24.06
Database payload sizes	The MySQL Adapter, Microsoft SQL Server Adapter, PostgreSQL Adapter, IBM DB2 Adapter, SAP ASE (Sybase) Adapter, Netezza Adapter, and Snowflake Adapter now support 100 MB structured payloads for the cloud and 50 MB structured payloads with the connectivity agent. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i> .	24.06
Oracle Advanced Queuing (AQ) Adapter - SCAN DNS and public gateway support	The Oracle Advanced Queuing (AQ) Adapter supports connecting to the Oracle Database using a Single Client Access Name (SCAN). The Oracle Advanced Queuing (AQ) Adapter now also supports the public gateway as an endpoint access type. See Oracle Advanced Queuing (AQ) Adapter Capabilities in <i>Using the Oracle Advanced Queuing (AQ) Adapter with Oracle Integration 3</i> .	24.06
GCP Pub Sub Adapter - JWT User Assertion security policy support	The GCP Pub Sub Adapter enhances its security policy for trigger and invoke connections in the following ways: - For trigger connections: JWT User Assertion for OAuth and JWT Validation. - For invoke connections: OAuth Code Credentials and JWT User Assertion for OAuth. The GCP Pub Sub Adapter also supports pull messages for consuming the published messages and acknowledge messages for acknowledging the pulled (consumed) messages. See GCP Pub Sub Adapter Capabilities in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i> .	24.06
GCP Storage Adapter - JWT User Assertion security policy support	The GCP Storage Adapter supports the JWT security policy (service account-based authentication). The added security available with the JWT security policy does not set any limit on the expiration of refresh tokens. See GCP Storage Adapter Capabilities in <i>Using the GCP Storage Adapter with Oracle Integration 3</i> .	24.06

Feature	Description	Minimum Version Required
Coupa Sourcing Adapter - Enhancements	The Coupa Adapter has been renamed to the Coupa Sourcing Adapter. With this release, the Coupa Sourcing Adapter provides attachment exports, allowing for files of up to 250 MB in size. The Coupa Sourcing Adapter now also supports the Authorization Code Security Policy, strengthening security for robust access control. See Coupa Sourcing Adapter Capabilities in <i>Using the Coupa Sourcing Adapter with Oracle Integration 3</i>.	24.06
Microsoft Entra ID Adapter - Organization hierarchy operations support	The Microsoft Entra ID Adapter introduces new operations that can be performed on the user business object for outbound invocations. This enhancement benefits users by providing a more efficient and comprehensive management of organizational hierarchies in Azure Active Directory. See Azure Active Directory Adapter Capabilities in <i>Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	24.06
Azure Event Grid Adapter - Trigger (inbound) enhancements	Support is provided for XML payload and XML namespace in the trigger (inbound) direction. See Add the Azure Event Grid Adapter Connection to an Integration in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	24.06
Adapter Certification updates	- The SAP S/4HANA Cloud Adapter is certified on S/4HANA 2024. - The Shopify Adapter is certified with the 2024-01 and 2024-04 API versions. See Connectivity Certification Matrix.	24.06

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Import and export of design-time artifacts	You can now export and import individual schemas and documents from the Schemas page and Documents page. This feature is useful if you are operating in B2B standalone mode and require an alternative to exporting and importing an entire trading partner, which includes all associated agreement details, along with the schemas and documents. See Export and Import B2B Schemas and Documents in <i>Using B2B for Oracle Integration 3</i>.	24.06

Feature	Description	Minimum Version Required
AS2 Adapter - Policy-based authentication for trigger connections and Drummond Certification Execution compliance	The AS2 Adapter supports the AS2 Advanced Message Protection security policy. This security policy is only available in the trigger (inbound) direction. This security policy authenticates the inbound message with message level digital signature verification. The AS2 Adapter is also compliant with Drummond Certification Execution. See <i>Configure Connection Security in Using the AS2 Adapter with Oracle Integration 3</i>.	24.06
B2B Dashboard page enhancements	You can view details about the top documents processed, including the total number processed, the error rate percentage, the document direction, and the total number of errors for that specific document. See <i>Monitor the Overall Runtime Health of B2B Transactions in Using B2B for Oracle Integration 3</i>.	24.06

File Server Features

Feature	Description	Minimum Version Required
Encrypting and decrypting files	You can now use the File server action along with the stage file action to complete the following tasks: • Encrypt a file and then write the file to File Server. • Decrypt an encrypted file that is in File Server. The File server action gets a reference to a file, and the stage file action encrypts or decrypts the file. You can also write encrypted files and decrypt encrypted files by pairing the File server action with a connection that is based on the FTP Adapter. For more information about these encryption and decryption capabilities, see <i>Interact with Files in File Server in Using Integrations in Oracle Integration 3</i>.	24.06

April 2024 (24.04)

Common Features

Feature	Description	Minimum Version Required
Customer-managed disaster recovery support	You can build a customer-managed disaster recovery solution for Oracle Integration. See Introduction in <i>Configuring a Customer-Managed Disaster Recovery Solution for Oracle Integration 3</i> .	24.04
TLS cipher rotation update	Oracle Integration has rotated the following TLS ciphers: - TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256 - TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384 - TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 - TLS_DHE_RSA_WITH_AES_128_CBC_SHA256 - TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 Applications using the above TLS ciphers can no longer communicate with Oracle Integration. If your application is configured to use one of the above rotated TLS ciphers, replace it with one of the following supported TLS ciphers: - TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 - TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 - TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 See Inbound and Outbound Endpoints and Transport Layer Security Server Version Support in <i>Using Integrations in Oracle Integration 3</i> .	April 2024
Custom endpoints <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	You can map a custom endpoint to an Oracle Integration instance and use it to access the instance instead of the original URL generated in the Oracle Cloud Console. See Configure a Custom Endpoint for an Instance in <i>Provisioning and Administering Oracle Integration 3</i> .	24.04
OCI Logging Analytics	If you use the public logging service capabilities of Oracle Cloud Infrastructure to collect and manage the activity stream of integrations, note that the following data is now published to the activity stream service logs. The opcRequestId GUID (Open Platform Communications ID) is used during this process. - Tracking variable fields - Distinct GUIDs for the flow IDs - Project details (The project ID is sent, which is analogous to the project name.) See Details for Integration 3 and Capture the Activity Stream of Integrations in the Oracle Cloud Console in <i>Provisioning and Administering Oracle Integration 3</i> .  Video	24.04

Feature	Description	Minimum Version Required
Video updates	We've greatly enhanced our catalog of Oracle Integration videos. Have a look at the categories to see if there is a video that matches your needs: - Technologies at a Glance: Describes key emerging technologies in Oracle Integration. - Integration Exploration: Provides introductions to Oracle Integration components. These videos are ideal for new users. - Live Demos: Provides hands-on demonstrations and use cases for our technologies. See Oracle Integration Videos.	N/A
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. Purge Old Files Sync Orders between Shopify and SAP S/4HANA Export Employee Records from Workday to Azure AD  Video	24.04
Additional instances are ready for upgrade	The following instances can now be upgraded to Oracle Integration 3: If you used Process in Oracle Integration Generation 2 but have no active usage, Process Automation will be provisioned as part of your Oracle Integration 3 upgrade. Process applications will be migrated on a best-effort basis.	N/A

 **Note**

If you have Process usage in production, wait until Oracle provides further guidance.

You must complete some steps before the upgrade. See [Complete Upgrade Prerequisites](#) in *Provisioning and Administering Oracle Integration 3*.

See [Upgrade from Oracle Integration Generation 2 to Oracle Integration 3](#) in *Provisioning and Administering Oracle Integration 3*.

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Rapid Adapter Builder - OpenAPI support	Using the Rapid Adapter Builder, you can build an adapter from an OpenAPI document that describes a set of application APIs. See About the Adapter Definition Document in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i>.	24.04

Feature	Description	Minimum Version Required
Rapid Adapter Builder - Adapter bundle	Using the VS Code Extension for Rapid Adapter Builder, you can register or download all artifacts related to an adapter as a single bundle. An adapter-bundle file has the .rab extension. See Register an Adapter on Oracle Integration and View the Registered Adapters in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i> .	24.04
JSON payload syntax validation	You can select to validate JSON payload syntax during activation of REST Adapter trigger connection-based integrations. Validation consists of checking for duplicate keys in the payload. See Activate an Integration in <i>Using Integrations in Oracle Integration 3</i> .	24.04
Activity stream sorted by duration	To diagnose performance issues, you can sort the activities in the activity stream by the elapsed time. This sort ensures that the most time-consuming activities show first and the best performing activities appear at the bottom. See Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i> .	24.04
File server action in the integration canvas	See File Server Features .	24.04
Connection sharing between projects	You can share connections between projects. When you create a connection in a project, the Create connection panel includes a toggle button for sharing the connection with other projects. This field is <i>not</i> available when creating a connection outside of a project. Connection sharing eliminates the need to create and maintain separate connections in different projects. See Add and Share a Connection Across a Project in <i>Using Integrations in Oracle Integration 3</i> .  Video	24.04
Digital signature security certificate upload	You can upload a digital signature security certificate on the Certificates page. The digital signature security certificate is typically used with adapters created with the Rapid Adapter Builder. See Upload a Certificate to Connect with External Services in <i>Using Integrations in Oracle Integration 3</i> .	24.04
Private endpoint support for multiple adapters	You can configure the Salesforce REST Adapter, SugarCRM Adapter, Magento Commerce Cloud Adapter, SAP SuccessFactors Adapter, SAP Concur Adapter, QuickBooks Adapter, eBay Marketplace Adapter, SAP Commerce Cloud (Hybris) Adapter, HubSpot Adapter, and Workday Adapter to connect to endpoints using a private virtual cloud network (VCN). See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i> .	24.04

Feature	Description	Minimum Version Required
SCAN DNS support for private endpoints	SCAN DNS is now supported with private endpoints for the Oracle Database Cloud Service Adapter, Oracle Autonomous AI Transaction Processing (ATP) Adapter, and Oracle Autonomous AI Lakehouse (LH) Adapter. See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i>,	24.04
Coupa Sourcing Adapter - Attachment and custom field support	The Coupa Sourcing Adapter now enables you to configure the attachment module and execute actions such as GET ALL Attachments for a requisition, purchase order, invoice, and so on for large-scale data transfers. The Coupa Sourcing Adapter also supports custom fields, which enhance data management capabilities. See Coupa Adapter Capabilities in <i>Using the Coupa Sourcing Adapter with Oracle Integration 3</i>.	24.04
Amazon Simple Queue Service (SQS) Adapter - New adapter	The Amazon Simple Queue Service (SQS) Adapter is the latest addition to our messaging adapters category. The Amazon Simple Queue Service (SQS) Adapter optimizes messaging tasks on AWS. The Amazon Simple Queue Service (SQS) Adapter includes advanced features such as queue attribute management, which enhances efficiency and scalability. Amazon SQS also serves as a gateway for other AWS services such as AWS DynamoDB, EC2, AWS SNS, and others. See Amazon Simple Queue Service (SQS) Adapter Capabilities in <i>Using the Amazon Simple Queue Service (SQS) Adapter with Oracle Integration 3</i>.  Video	24.04
Amazon Simple Storage Service (S3) Adapter - New adapter	The Amazon Simple Storage Service (S3) Adapter is the latest addition to our storage adapter category. The Amazon Simple Storage Service (S3) Adapter enables you to leverage the secure and dynamic storage space offered by Amazon, facilitating connectivity and storage operations through the Amazon Simple Storage Service (S3) Adapter invoke role. See Amazon Simple Storage Service (S3) Capabilities in <i>Using the Amazon Simple Storage Service (S3) Adapter with Oracle Integration 3</i>.	24.04
Oracle Primavera Cloud Data Service Adapter	The Oracle Primavera Cloud Data Service Adapter is a new addition to the industries category of adapters in Oracle Integration. This adapter extracts data from Primavera scheduling solutions. You can configure the Oracle Primavera Cloud Data Service Adapter as an invoke connection in an integration in Oracle Integration. See Oracle Primavera Cloud Data Service Adapter Capabilities in <i>Using the Oracle Primavera Cloud Data Service Adapter with Oracle Integration 3</i>.	24.04

Feature	Description	Minimum Version Required
REST Adapter and Rapid Adapter Builder - Polymorphic construct support	The REST Adapter and Rapid Adapter Builder support the polymorphic constructs allOf and oneOf in OpenAPI documents. See Support of Polymorphic Constructs for OpenAPI Connectivity in <i>Using the REST Adapter with Oracle Integration 3</i> .	24.04
HubSpot Adapter - Search API support	The HubSpot Adapter now supports the Search API. This enhancement includes the Filter Parameters, Add Sorting, and Select Properties features. By using this enhancement, you get filtered and sorted results as per your business needs. In addition, you can specify the properties that you want to retrieve. See HubSpot Adapter Capabilities in <i>Using the HubSpot Adapter with Oracle Integration 3</i> .	24.04
Oracle Advanced Queuing (AQ) Adapter - Wallet support	The Oracle Advanced Queuing (AQ) Adapter now enables support for the Oracle Wallet security policy, facilitating secure connections to Oracle Autonomous AI Transaction Processing, Oracle Autonomous Data Warehouse, and Oracle Database Classic Cloud Service instances over SSL. See Oracle Advanced Queuing (AQ) Adapter Capabilities in <i>Using the Oracle Advanced Queuing (AQ) Adapter with Oracle Integration 3</i> .	24.04
OData Adapter - Enhancements	The OData Adapter has been enhanced to support the following: • Operations such as Get, Query, Create, Update, Replace, and Delete on the contained entity. • Batch operations using the connectivity agent. The OData Adapter enables you to integrate on-premises applications with Oracle Integration using the connectivity agent. See OData Adapter Capabilities in <i>Using the OData Adapter with Oracle Integration 3</i> .	24.04
PostgreSQL Adapter - Managed PostgreSQL Database Service certification on Oracle Cloud Infrastructure	If you select the Username Password Token With SSL Support security policy when configuring a PostgreSQL Adapter connection, you can select OCI Managed DB as the database instance type. See Configure Connection Security in <i>Using the PostgreSQL Adapter with Oracle Integration 3</i> .	24.04
Azure Event Grid Adapter - XML message support	The Azure Event Grid Adapter supports XML payload message structures. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i> .	24.04
Azure Storage Adapter - XML message format support	The Azure Storage Adapter now supports the XML message format for the Set Blob Tags and Set Blob Service Properties operations. See Azure Storage Adapter Capabilities in <i>Using the Azure Storage Adapter with Oracle Integration 3</i> .	24.04

Feature	Description	Minimum Version Required
SAP Concur Adapter - Security policy enhancements	You can now customize connections even more by adjusting the Resource Owner Password Credentials (ROPC) security policy to fit your exact needs. This means you can now choose whether you want credentials to be authenticated at the company level or for specific users. See SAP Concur Adapter Capabilities in <i>Using the SAP Concur Adapter with Oracle Integration 3</i> .	24.04
Salesforce Marketing Cloud Adapter - Automation event support	The Salesforce Marketing Cloud Adapter extends its inbound capabilities to provide support for receiving notifications for Email Events and Automation Events. See Salesforce Marketing Cloud Adapter Capabilities in <i>Using the Salesforce Marketing Cloud Adapter with Oracle Integration 3</i> .	24.04
SAP Adapter - Certification	The SAP Adapter is certified with SAP S/4HANA 2023. See Connectivity Certification Matrix .	24.04
Oracle Hospitality Adapter - Support for the OCIM identity provider and NOR1 APIs	The Oracle Hospitality Adapter extends its authentication capabilities by introducing OCIM identity provider support. The Oracle Hospitality Adapter now supports OAuth token calls with the Scope and Enterprise ID fields during connection configuration. The Oracle Hospitality Adapter also continues to support the SSD identity provider authentication method. See Oracle Hospitality Adapter Capabilities in <i>Using the Oracle Hospitality Adapter with Oracle Integration 3</i> .	24.04

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Standalone mode enhancements	The following document standards can now be used in standalone mode integrations. Standalone mode enables data transformations to and from B2B documents/standards without the need to configure a trading partner. You can select the document standard and document definition when configuring the B2B action in the integration canvas. • Fixed length • Custom XML • OAG • X12 HIPAA • Delimited See Use B2B for Oracle Integration in Standalone Mode in <i>Using B2B for Oracle Integration 3</i> .	24.04

Feature	Description	Minimum Version Required
Delimited payload support	B2B for Oracle Integration now supports delimited payloads in inbound and outbound transactions. You create a schema and document from a delimited payload to use in integrations. During runtime, the delimited payload is translated to XML (and vice versa) based on the schema you created. Delimited payload support is provided in both standalone and trading partner modes. See Delimited Payload Support in <i>Using B2B for Oracle Integration 3</i>.	24.04
B2B dashboard - Trading partner runtime metrics	You can click a trading partner on the B2B page to view the number and type of documents delivered, the document direction, and the number of failed documents and documents pending acknowledgment. See Monitor the Overall Runtime Health of B2B Transactions in <i>Using B2B for Oracle Integration 3</i>.	24.04
Define correlation parameters for all document types	When creating document definitions, you can now define correlation parameter values for the X12, EDIFACT, X12 HIPAA, OAG, custom XML, fixed length, and delimiter document standards. This functionality aligns with the RosettaNet document standard, which already supports this feature. These values enable you to correlate documents related in any business transactions. For example, in the following Order to Cash use case, X12 documents are typically transacted in the following order: 850 -> 855 -> 810 -> 856 -> 820 See Create a Custom B2B Document Definition in <i>Using B2B for Oracle Integration 3</i>.	24.04
Define delimiters for outbound X12 and EDIFACT documents	When creating document definitions, you can now specify the delimiters to use with standalone mode outbound X12 and EDIFACT documents. Delimiters are supported for element, subelements, segments, and repetitions. See Create a Custom B2B Document Definition in <i>Using B2B for Oracle Integration 3</i>.	24.04
Migration of B2B artifacts from Oracle SOA Suite	A utility is provided for migrating of B2B artifacts including trading partners configurations, schema, and documents from B2B in Oracle SOA Suite to Oracle Integration. See Migrate B2B Artifacts from Oracle SOA Suite to Oracle Integration in <i>Using B2B for Oracle Integration 3</i>.	24.04


Feature	Description	Minimum Version Required
Schemas and Documents pages changes	The user interface behavior has been simplified for creating schemas and documents. • You cannot create an OAG, custom XML, RosettaNet, fixed length, or delimited document definition without first creating a schema. • When creating a schema or document definition that uses OAG, custom XML, RosettaNet, fixed length, the text fields (for document version, document type, and others) have been replaced with drop-down lists. • When you create an EDIFACT, X12, or X12 HIPAA document definition, you can select an existing schema or the standard schema type (if an existing schema does not exist). • When creating an inbound or outbound trading partner with an OAG, custom XML, RosettaNet, fixed length, or delimited document definition, the text fields (for document version, document type, and others) have been replaced with drop-down lists. See Create a New B2B Schema and Create a Custom B2B Document Definition in <i>Using B2B for Oracle Integration 3</i>.	24.04

File Server Features

Feature	Description	Minimum Version Required
File server action in the integration canvas	A new File server action now allows you to connect to File Server from within an integration. The File server action is similar to an adapter for File Server. Previously, you needed to configure the FTP Adapter to communicate with File Server. You can still connect to File Server using the FTP Adapter. However, performance is better with the File server action. You can redesign existing integrations to use the File server action, or you can continue using the FTP Adapter: It's up to you. You can perform the following tasks in an integration using the File server action: - Obtain a list of files in File Server. - Write or move a file to File Server. - Get the reference of a file that is in File Server, and then stage read or unzip the file. - Delete a file from File Server. Some tasks aren't yet available with the File server action. For example, if you need to perform the following tasks, use either the stage file action or an FTP Adapter connection: - Encrypt or decrypt a file. - Sign or verify a file. Additionally, to write a file to a temporary storage location and then perform work on the file, such as by updating the file, use the stage file action. For more information, see: - Interact with Files in File Server in <i>Using Integrations in Oracle Integration 3</i> - Tutorial: Read Files and Write the Files to File Server in <i>Using File Server in Oracle Integration 3</i>.  Video	24.04

February 2024 (24.02)

Common Features


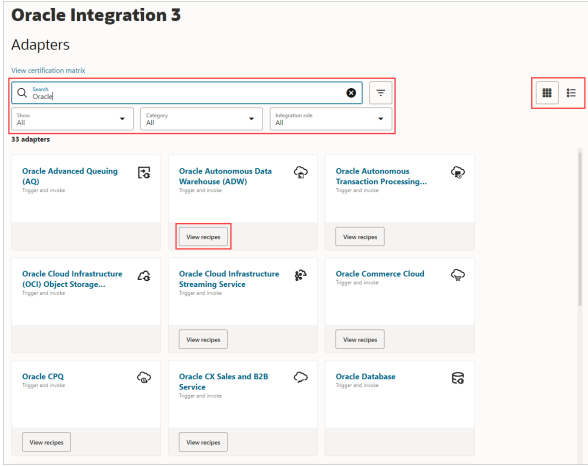
Feature	Description	Minimum Version Required
Improved Adapters page on the Oracle Help Center	The Adapters page on the Oracle Help Center now offers graphical views of the available adapters and improved searching and filtering capabilities: - Find adapter documentation quickly by searching using keywords. - Browse the available adapters by filtering by category, integration role, most popular, and more. - View the adapters in card view or list view. - View the recipes that are available for a given adapter.	24.02
		
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: - UK Gov South, London (LTN) - UK Gov West, Newport (BRS) - US DoD North, Chicago (PIA) - US DoD West, Phoenix (TUS) See Availability in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A

Feature	Description	Minimum Version Required
Additional instances are ready for upgrade	The following instances can now be upgraded to Oracle Integration 3: - Instances that use allowlists. You must complete some steps before the upgrade. See Update Allowlists and Complete Pre-Upgrade Tasks in <i>Provisioning and Administering Oracle Integration 3</i>. - If you use the Processes capability but aren't using it in production, you have the option to skip process applications during upgrade. This approach is appropriate if you've tried Processes in non-production Oracle Integration Generation 2 environments but don't need or want to retain it in Oracle Integration 3. Note - If you have process in production, wait until Processes upgrade is supported. - Importing process applications created in Oracle Integration Generation 2 into Oracle Integration 3 isn't currently supported. You must complete some steps before the upgrade. See Complete Upgrade Prerequisites in <i>Provisioning and Administering Oracle Integration 3</i>. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A


Integration and Connectivity Features

Feature	Description	Minimum Version Required
Build your own adapters with the Rapid Adapter Builder	The Rapid Adapter Builder transforms the adapter experience in Oracle Integration by allowing you to build an adapter for any application that exposes REST APIs. Oracle provides a Visual Studio Code extension for the Rapid Adapter Builder. Use the extension to develop, validate, and publish an adapter to an Oracle Integration instance. See Learn About the Rapid Adapter Builder in Oracle Integration in <i>Using the Rapid Adapter Builder with Oracle Integration 3</i>.  Video	24.02

Feature	Description	Minimum Version Required
Test an integration from the canvas	You can test REST Adapter trigger connection-based integrations and scheduled integrations with the  button in the integration canvas. This button automatically activates your integration with the tracing level set to debug and lets you specify request details from inside the integration canvas. This capability simplifies integration testing and eliminates the need to separately exit the canvas, activate the integration and set the tracing level, and access the Configure and run page to specify your request details. See Test Integrations from Inside the Integration Canvas in <i>Using Integrations in Oracle Integration 3</i>.	24.02
Observability enhancements	Observability has received the following enhancements. • The Filter  is enhanced to show fields for searching for an error message and a detailed error message. See View Error Messages and the Message Payload in the Activity Stream of Failed Instances in <i>Using Integrations in Oracle Integration 3</i>. • Two new REST API attributes are available for viewing the minimum and maximum durations that it takes to execute integration instances (minDuration and maxDuration). See Developer API for Oracle Integration 3. • The activity stream now shows the user that invoked the integration at the top. Wed Jan 17 10:20:49.497 AM EST 2024, Started by l2serviceadmin	24.02

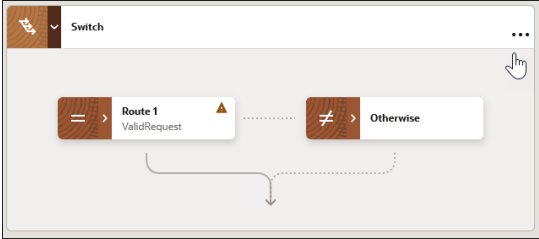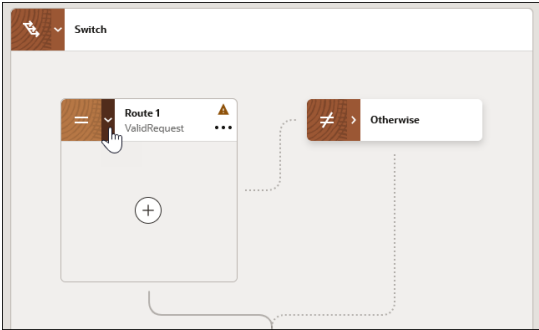Feature	Description	Minimum Version Required
Jet Redwood diagram uptake in the integration canvas	The design-time and runtime integration canvas has been enhanced with the Jet Redwood diagram component. Key changes include the following: - The header bar now extends the full width of a node. The following switch action provides an example. If you expand the node (for example, add another route to the switch), the header bar is extended further.  - You can expand and collapse the individual routes in switch actions, branches in parallel actions, and individual pick actions in a REST Adapter trigger connection. The following switch action example shows that both Route 1 and Otherwise are collapsed. Both are treated as separate groups.  - The main group and fault handler of a scope action are visible side by side. You can collapse each separately. If you add more than one fault handler, they are added to a fault handling group. The main group and each individual fault handler in the fault handler group can also be collapsed. If you delete fault handlers until only one is left, the fault handler group is deleted and the remaining fault handler is visible side by side with the main group.	24.02

Feature	Description	Minimum Version Required
---------	-------------	--------------------------

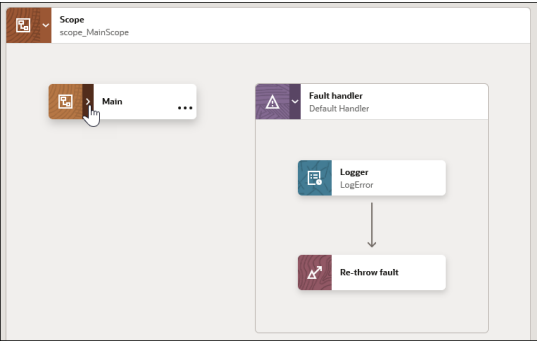


- When you drag an invoke connection into the canvas, a placeholder is created immediately. If you exit the Adapter Endpoint Configuration Wizard before completing configuration, the invoke remains highlighted in the canvas in an unconfigured state. You can resume the configuration later.
- Actions in accelerator integrations that cannot be edited are grayed out. The node for anything that can be edited, such as an invoke connection, is highlighted in blue.



When you add an extension group before and after the invoke, the invoke switches to grayed out. The extension groups are highlighted in blue and ready for editing.

- In the runtime canvas, the nodes for successful and failed actions are highlighted in green and red, respectively.

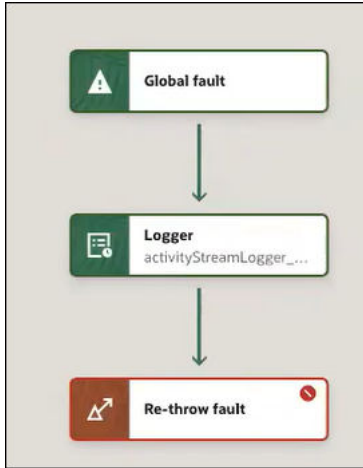Feature	Description	Minimum Version Required
		
Stage file performance improvements	Stage file performance has improved significantly over the past few releases. If you previously reported stage file performance concerns, you will notice these improvements.	24.02
Confluent Adapter and Apache Kafka Adapter - Streaming API support	When configuring the Confluent Adapter or Apache Kafka Adapter in the Adapter Endpoint Configuration Wizard, you can select to read data from topics in the Kafka cluster with the Apache Kafka Streaming API. See Basic Info Page in <i>Using the Confluent Adapter with Oracle Integration 3</i> and Basic Info Page in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i> .	24.02
Private endpoint support for multiple adapters	You can configure the PayPal Adapter, GraphQL Adapter, Jira Adapter, OData Adapter, Shopify Adapter, AS2 Adapter, Zendesk Adapter, Salesforce Commerce Cloud Adapter, ServiceNow Adapter, and Marketo Adapter to connect to endpoints using a private virtual cloud network (VCN). See Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i> .	24.02
Private endpoint - OAuth 2.0 support	For private endpoints, an OAuth provider is now supported if it is privately hosted.	24.02
Coupa Sourcing Adapter - New adapter	Coupa Sourcing Adapter is the latest addition to Oracle Integration's ERP category. The Coupa Sourcing Adapter offers simplified integration for streamlined procurement, expenses, and invoicing. See Coupa Adapter Capabilities in <i>Using the Coupa Sourcing Adapter with Oracle Integration 3</i> . Video	24.02

Feature	Description	Minimum Version Required
Salesforce REST Adapter - New adapter	The Salesforce REST Adapter provides almost the same set of capabilities as the Salesforce Adapter, along with new enhancements that use Salesforce REST APIs under the cover. In addition, the Salesforce REST Adapter incorporates security best practices by removing the support for less secure authentication schemes such as the Resource Owner Password Credentials Flow policy and Basic Authentication policy. See <i>Salesforce REST Adapter Capabilities in Using the Salesforce REST Adapter with Oracle Integration 3</i>.  Video	24.02
FTP Adapter	The FTP Adapter now supports signing and verification of data using the ECdsa and EDdsa PGP keys. See <i>FTP Adapter Capabilities in Using the FTP Adapter with Oracle Integration 3</i>.	24.02
Snowflake Adapter - Enhancements	The Snowflake Adapter provides access to Snowflake's internal stages for importing and exporting bulk data to and from the Snowflake database. The Snowflake Adapter also provides support for executing SQL queries and performing operations against tables in the Snowflake database. See <i>Snowflake Adapter Capabilities in Using the Snowflake Adapter with Oracle Integration 3</i>.	24.02
HubSpot Adapter - Inbound support	The HubSpot Adapter now provides inbound (trigger) support for Companies, Contacts, Deals, Line_items, Products, and Tickets for creation, deletion, and property change events. In addition, it provides authentication options using HMAC and OAuth 2.0. See <i>HubSpot Adapter Capabilities in Using the HubSpot Adapter with Oracle Integration 3</i>.	24.02
Microsoft Entra ID Adapter - Enhancements	The Microsoft Entra ID Adapter has been enhanced to automatically renew the webhook subscription for active integrations, eliminating the need for manual intervention. You can also subscribe to user and group events. See <i>Azure Active Directory Adapter Capabilities in Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	24.02
OData Adapter - Enhancements	The OData Adapter has been enhanced with the following features: • Multilevel navigation support (Deep Insert) for the Create operation. • Client certificate-based authorization (for the cloud) See <i>OData Adapter Capabilities in Using the OData Adapter with Oracle Integration 3</i>.	24.02

Feature	Description	Minimum Version Required
Azure Event Grid Adapter - Avro support	The Azure Event Grid Adapter now supports configuring the following features in the Adapter Endpoint Configuration Wizard: - Selecting the Enable payload fields option to represent the individual data elements within the payload of integrations. The elements play a crucial role in defining how data is transferred and transformed between connected systems. - The Avro schema message structure. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	24.02
Azure Storage Adapter - Delete blob option	You can select to delete the blob after downloading it from the Azure portal in the Adapter Endpoint Configuration Wizard. See Azure Storage Adapter Capabilities and Invoke Configuration Page in <i>Using the Azure Storage Adapter with Oracle Integration 3</i>.	24.02
Azure Service Bus Adapter - Enhancements	The Azure Service Bus Adapter has been enhanced with the following features: - Cloud support - Instance tracking wire payload See Azure Service Bus Adapter Capabilities in <i>Using the Azure Service Bus Adapter with Oracle Integration 3</i>.	24.02
Oracle Service Cloud (RightNow) Adapter - REST Type connection support	See in <i>Using the Oracle Service Cloud (RightNow) Adapter with Oracle Integration 3</i>.	24.02
Zuora Adapter - Network call optimization	The Zuora Adapter provides support for more than four REST calls. See Zuora Adapter Capabilities in <i>Using the Zuora Adapter with Oracle Integration 3</i>.	24.02
SAP SuccessFactors Adapter - Support for pagination and multilevel expanding	The SAP SuccessFactors Adapter has received the following enhancements: - Supports multilevel navigation for data retrieval, building on its existing capability. You can seamlessly navigate between entities using the navigation property. - Enhances outbound invocations with pagination support, facilitating efficient handling of large data sets. - Introduces new query parameters \$inlinecount and CustomPageSize for additional flexibility in GET and Search operations, complementing the existing OData-compatible query options such as \$expand, \$select, \$filter, \$orderby, \$top, and \$skip. See SAP SuccessFactors Adapter Capabilities in <i>Using the SAP SuccessFactors Adapter with Oracle Integration 3</i>.	24.02

Feature	Description	Minimum Version Required
GCP Pub Sub Adapter - Avro support	The GCP Pub Sub Adapter has been enhanced to support the Avro message structure. The adapter now enables you to subscribe to messages (inbound) and publish messages (outbound) to topics associated with the Avro schema. See GCP Pub Sub Adapter Capabilities in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i> .	24.02
Oracle Eloqua Cloud Adapter - Support for updating multiple records	The Oracle Eloqua Cloud Adapter has been enhanced to support updating multiple matched records in Eloqua by using the Eloqua Bulk API in an invoke connection. See Invoke Operations Page in <i>Using the Oracle Eloqua Cloud Adapter with Oracle Integration 3</i> .	24.02
Shopify Adapter - API certification	The Shopify Adapter is now certified on versions 2023-07 and 2023-10. See the Connectivity Certification Matrix .	24.02

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
B2B Metric dashboard	You can view the overall health of B2B for Oracle Integration transactions from the B2B dashboard page. This page provides an easy way to detect and manage failed messages in your environment. See Monitor the Overall Health of B2B Transactions in <i>Using B2B for Oracle Integration 3</i> .	24.02
Positional flat file/native format support	B2B for Oracle Integration can consume positional flat or fixed length payloads (also called data files in native format) in inbound and outbound translations. These files can be of fixed length for various fields, CSV, delimited, and other formats. B2B for Oracle Integration enables you to define a B2B schema and document from these various formats and include the document in a trading partner agreement. See Positional Flat or Fixed Length Payloads Support in <i>Using B2B for Oracle Integration 3</i> .  Video	24.02
X12 HIPAA standard	B2B for Oracle Integration supports the X12 HIPAA standard to exchange documents over the internet. X12 HIPAA is a subset of the X12 standard and is used in the healthcare industry for the exchange of data about health insurance claims and payments. See About X12 HIPAA in <i>Using B2B for Oracle Integration 3</i> .	24.02

Visual Builder Features

Feature	Description	Minimum Version Required
Dark theme	You can now personalize the Designer's theme to switch from the default light theme to a dark theme more suited for low-light conditions. You can also sync your environment's color palette with your OS settings. See Tour the Designer. With support for a dark theme, favicons can now be set independently for light and dark themes for each of your applications. You can set the favicon to any image in the image gallery by simply changing the favicon in the application's Settings editor. See Manage App Settings.	n/a
Highlighting of default flow/page in the navigator	The default page and flow within your app are now badged as default in the navigator for easier identification. This way, you can quickly identify the entry points for your app without having to check artifact configuration. See How are Applications Structured?	n/a
Page header fragment	New pages in web applications now include a page - header fragment to hold page-specific boilerplate content that appears above the page's visual stripe. While you won't work with the fragment directly, you can customize the fragment to create a custom page-level header. See Customize Page Headers.	n/a

 Note

Pages created with previous versions will not be affected. These pages will maintain their original structure even after your app is upgraded to 24.04.

Feature	Description	Minimum Version Required
Fragments	- Fragments as sections for dynamic containers It's now possible to add fragments as sections in a dynamic container. By default, all fragments tagged as <code>pageContent</code> become available for selection when you add a section to a dynamic container. You also have the option of indicating a particular fragment as preferred content for all sections in the container. See Add Fragments as Sections in a Dynamic Container. - InstanceFactory types for fragments Types from code, known as <i>InstanceFactory</i> types, can now be defined in fragments, making these types accessible to fragments. As with all fragment artifacts, these types are local to the fragment. See Create a Type From Code. - New properties for fragment slots The Fragment Slot component now provides several new properties to help you configure a named slot, including a Preferred Content option that indicates the type of content the slot can contain. See Add Slots to a Fragment. - Drag and drop for fragment slots Fragment consumers can now drag and drop their component of choice onto a fragment slot in the fragment's Properties pane, in addition to the Insert Component option. See Add Slots to a Fragment. - Improvements on customizing fragment variable display in the Properties pane - If your fragment variable uses an array of primitives (for example, <code>String[]</code>), you can now edit the fragment's JSON to display a drop-down menu showing all values for each item in the array. See Subtypes and valueOptions for arrays in Customize How a Fragment Variable is Displayed in the Properties Pane. - When an object-type input parameter in a fragment is customized to display an endpoint picker, fragment users can use the Configure Endpoint quick start to select a suitable endpoint and choose its URI parameters. See Customize How a Fragment Variable is Displayed in the Properties Pane. - When sectioning fragment properties, you can now use a Label	n/a

Feature	Description	Minimum Version Required
	field to provide a user-friendly name for the fragment variable. This is particularly useful for dynamic components with data that might take a while to display in the Page Designer. See Section Fragment Properties for Display in the Properties Pane.	
Buffering Data Provider type	Oracle JET's Buffering Data Provider, which temporarily stores data changes in a buffer until they are ready to be committed to the data source, is now available as a type out of the box in Visual Builder. You can create variables based on the Buffering Data Provider type and bind them to tables, list views, or any component that accepts a data provider. See Create Variables to Temporarily Store Data in a Buffer.	n/a
Audit improvements	We've made several improvements, including performance updates, to enhance the auditing experience, key among them being: • Navigator badge to indicate audit error Audit errors are now badged in the Navigator to indicate that action must be taken to resolve the issue. The badge persists until the error is fixed or until the session ends. • New Copy to Clipboard option A new Copy to Clipboard option in the right-click menu allows you to copy one or all audit issues to your clipboard for further processing. See Audit Application Code.	n/a
Build-related logs	You can now troubleshoot build-related issues that prevent your app from being staged or published. Build logs are available in a new Logs tab at the bottom of your browser. See Troubleshoot Build Issues.	n/a
Prerendered pages for improved SEO	In an effort to improve search engine optimization (SEO), Visual Builder now prerenders and caches your application's pages, returning a fully rendered page to web crawlers for indexing. To further improve response times, use the <code>vb-prerender-cache-warm</code> Grunt task to warm the cache for URLs listed in your application's sitemap, so web crawlers always get the fastest possible response when requesting those URLs. See Optimize Your App for Search Engines.	n/a

Feature	Description	Minimum Version Required
Page Designer improvements	- Core Pack in Components palette The next generation of Oracle JET components, known as Core Pack components, are now available in the Components palette as part of the Early Access category. These components, written entirely using the VComponent API and the JET Virtual DOM architecture, are available as a completely new set of components, so you can use Core Pack and legacy components side by side in your application. Core Pack components provide improved rendering performance over legacy components. See Add Components to Pages. - Page input parameters from parent flows When input parameters for a page are defined beyond its current scope (say, at the app or flow level), those parameters are now listed in the Page Input Parameters dialog, allowing you to readily pass the input parameter from parent flows and pages. See Enable Variables as Input Parameters. - Live/Design toggle change To switch between Live and Design modes using the Ctrl key (Cmd on Mac), the cursor must now be on the canvas. This way, the mode won't switch when the canvas is not in focus. Releasing the key to switch the toggle back works anywhere. See Use the Page Designer.	n/a
Option to reopen closed tabs	To reopen recently closed tabs, you can now simply right-click an empty space on the tab bar in the Page Designer and select Reopen Closed Tab —until you get to the tab you want to reopen. See Tour the Designer .	n/a
Automatic endpoint selection in collection quick starts	When using a business object or a service with expected endpoints, Visual Builder now automatically selects the correct endpoint in the Add Create Page, Add Edit Page, and Add Detail Page quick starts. You only need to select the fields you want to display in your pages. See Use the Create Page Quick Start , Use the Add Edit Page Quick Start , and Use the Add Detail Page Quick Start .	n/a

Feature	Description	Minimum Version Required
Event enhancements	- Event editor updates to improve developer productivity We've reworked how new action chains are generated when you create a listener for an event. Previously, you would use several clicks to create a new action chain at the desired scope with a particular name in the Create Event Listener wizard. Now you simply click the Create {scope} Action Chain option to generate an action chain with a name in the format {event/}varId}ChangeListener. See Create Event Listeners for Events. - New behavior type for custom events The <code>transform</code> behavior type for custom events is deprecated and replaced by the new <code>transformPayload</code> behavior type for <i>new</i> event listeners. The change does not impact existing apps with events configured to use the <code>transform</code> type, but the new <code>transformPayload</code> type addresses issues with invoking event listeners in the correct order. You are, therefore, encouraged to switch to the new behavior type for your existing apps. See Choose How Custom Events Call Event Listeners.	n/a

Feature	Description	Minimum Version Required
JavaScript action chain enhancements	• Actions tab renamed The Actions tab is now the Action Chains tab. • New options for local functions You can now <i>convert</i> a local function to an action chain so it can be used by other action chains. Simply right-click the local function and select the new Convert Function to Chain option. It's also possible to <i>create</i> a local function from an action on the canvas. Just drag an action on the canvas onto the Create Function button, or onto the green line that appears before or after a local function. See Design Editor. • Summary button to simplify action chain view You can now visually simplify your view of an action chain by hovering over the canvas's upper-left corner and clicking the Summary button. The Summary button hides the input parameter details of each action (except for the Assign Variable and Reset Variables actions). Click the Full button to switch back to the complete view. See Design Editor. • Simplified display for action parameters We've simplified and enhanced how parameters display in different actions. Parameters displayed in actions such as Open URL, Call REST, and Fire Data Provider Event are now grouped. Also, the Store Result In variable has been added to the header to make it more readable. • Changes to the Assign Variable action – The Assign Variable action can now be used to create a local variable, by adding the action and using the Properties pane to define it. – Consecutive Assign Variable actions are now consolidated into a single action. See Add an Assign Variable Action. • Support to drag and drop an action into an else branch You can now drag and drop an action into an <code>else</code> branch on the canvas.	n/a

Feature	Description	Minimum Version Required
Business objects	• UI changes for business objects based on your own schema When working with business objects that use your own schema, you'll notice some UI changes, primarily when adding or editing a business object's fields. See Create a Business Object Based on a DB Table or View and Add Fields to a Business Object Based on a DB Table or View. • Improved error handling for business object diagrams When business objects and their relationships don't display on the Diagram canvas because of syntax errors, the editor now displays an error message and allows you to edit the JSON source file (<code>diagram.json</code>) to fix the error.	n/a
Support for OCI Process Automation	Oracle Cloud Infrastructure Process Automation, a service that quickly automates business approval workflows, can now be integrated in Visual Builder. To leverage this functionality in your application, create an OCI Process Automation backend, then create service connections for the REST APIs you want to use. See Connect to Oracle Cloud Infrastructure Process Automation APIs .	n/a

6

New Features for 2023

Review the new features for 2023.

Topics:

- [December 2023 \(23.12\)](#)
- [October 2023 \(23.10\)](#)
- [August 2023](#)
- [July 2023](#)
- [June 2023](#)
- [May 2023](#)
- [April 2023](#)
- [March 2023](#)
- [February 2023](#)
- [January 2023](#)

December 2023 (23.12)

Common Features

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: • Chile West, Valparaiso (VAP) • Colombia Central, Bogota (BOG) See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. • Publish Shopify Orders to GCP Pub Sub • Import Sales Orders from Oracle ERP Cloud to MySQL • Import Purchase Orders from Oracle ERP Cloud to Microsoft SQL Server	23.12
Additional instances are ready for upgrade	Oracle Integration Generation 2 instances that use allowlists can now be upgraded to Oracle Integration 3. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A

Feature	Description	Minimum Version Required
Associate an instance with a secondary domain	If your tenancy uses identity domains, you can now associate an Oracle Integration 3 instance with a secondary identity domain—an identity domain other than the one you're signed into. This allows you to manage all your instances in your tenancy from one domain, rather than having to sign into each domain to manage the associated instances. See Creating an Oracle Integration Instance in Provisioning and Administering Oracle Integration 3.	23.12

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Notification of the status of asynchronous operations	You can view the current progress of some asynchronous, design-time operations from the notifications center icon in the Oracle Integration banner. This view eliminates the need to constantly refresh the page to check progress. See View the Progress of Asynchronous, Design-Time Operations in Using Integrations in Oracle Integration 3.	23.12
Import and export design-time metadata between instances <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	You can export and import archives of integration design-time metadata between Oracle Integration 3 instances. This feature can be useful if you want to take a snapshot of a production environment and try to recreate a problem in a different environment, move metadata from an instance in one region to an instance in another region, perform manual archives, and automate your environment to archive daily to a repository such as Git. See Clone the Design-Time Metadata of an Entire Service Instance in Using Integrations in Oracle Integration 3.	23.12
Deployment to Oracle Cloud Infrastructure API Gateway <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	You can deploy individual integration endpoints as routes to Oracle Cloud Infrastructure API Gateway. See Deploy Integration Endpoints to Oracle Cloud Infrastructure API Gateway in Using Integrations in Oracle Integration 3.	23.12

Feature	Description	Minimum Version Required
Project enhancements	Projects have received the following enhancements: - You can copy an integration into a project from the Copy integration panel. The integration to copy can be: - In a different project - Outside of any project (globally available) See Create, Import, or Copy an Integration into a Project in <i>Using Integrations in Oracle Integration 3</i>. - The integration limit in a project has increased to 100. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>.	23.12
TLS 1.3 support in outbound adapters	TLS version 1.3 is supported for outbound integrations. See Inbound and Outbound Endpoints and Transport Layer Security Server Version Support in <i>Using Integrations in Oracle Integration 3</i>.	23.12
Oracle CX Sales and B2B Service Adapter - Integration regeneration support	You can regenerate integration metadata as you add new custom fields in Oracle CX Sales and B2B Service. This capability eliminates the need to edit an endpoint in an integration. See Oracle CX Sales and B2B Service Adapter Capabilities in <i>Using the Oracle CX Sales and B2B Service Adapter with Oracle Integration 3</i>.	23.12
GraphQL Adapter - Inline fragment support	The GraphQL Adapter now supports defining and executing fragments. Both inline and named fragments are supported. See Operation Page in <i>Using the GraphQL Adapter with Oracle Integration 3</i>.	23.12
GitHub Adapter - Regeneration support	You can manually refresh the currently-cached metadata available to the GitHub Adapter. See Refresh Integration Metadata in <i>Using the GitHub Adapter with Oracle Integration 3</i>.	23.12
Salesforce Marketing Cloud Adapter - Inbound support	The Salesforce Marketing Cloud Adapter supports trigger (inbound) connections. See Salesforce Marketing Cloud Adapter Capabilities in <i>Using the Salesforce Marketing Cloud Adapter with Oracle Integration 3</i>.	23.12
Microsoft Entra ID Adapter - Inbound, regeneration, and pagination support	The Microsoft Entra ID Adapter includes the following new capabilities: - Supports trigger connection operations for User and Group events, allowing processing of notifications from Azure Active Directory to Oracle Integration. - Enhances outbound invocations with pagination support, allowing handling of large data sets. - Enables inbound and outbound connections to use the Refresh Integration Metadata option, providing for better control and synchronization. See Azure Active Directory Adapter Capabilities in <i>Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	23.12

Feature	Description	Minimum Version Required
Azure Storage Adapter - Outbound connectivity agent support and regeneration	The Azure Storage Adapter includes the following new capabilities: • Supports outbound invoke connections using the connectivity agent. • Introduces the Refresh Integration Metadata option, providing for better control and synchronization. See Azure Storage Adapter Capabilities in <i>Using the Azure Storage Adapter with Oracle Integration 3</i>.	23.12
Azure Event Grid Adapter - Webhook JWT authentication, domain cloud, and custom schema support	The Azure Event Grid Adapter includes the following new capabilities: • Bearer Token (JWT) authentication enhances security for more secure inbound trigger connections. • Extended operations support includes Domain and Domain Topics operations with both custom and cloud schema. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	23.12
GCP Pub Sub Adapter - Regeneration support	You can manually refresh the currently-cached metadata available to the GCP Pub Sub Adapter. See Refresh Integration Metadata in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i>.	23.12
GCP Storage Adapter - Regeneration support and ability to delete files/objects after downloading	You can manually refresh the currently-cached metadata available to the GCP Storage Adapter and delete files/objects after downloading. See Refresh Integration Metadata and Invoke Configuration Page in <i>Using the GCP Storage Adapter with Oracle Integration 3</i>.	23.12
Zuora Adapter - Custom field support in the inbound direction and regeneration	You can manually refresh the currently-cached metadata available to the Zuora Adapter. The Zuora Adapter also supports custom fields. See Zuora Adapter Capabilities and Refresh Integration Metadata in <i>Using the Zuora Adapter with Oracle Integration 3</i>.	23.12
OData Adapter - Batch operations support for OData V4 (cloud) and pagination support	The OData Adapter (invoke direction) introduces the following new capabilities: • Batch operations: Support with OData V4. • Pagination: Support with OData V2 and V4. The batch operation feature enables you to execute more than one operation as a batch. • Retrieve Operation: Get, Query • Modification Operation: Create, Update, Replace, Delete See OData Adapter Capabilities in <i>Using the OData Adapter with Oracle Integration 3</i>.	23.12

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
RosettaNet support	B2B for Oracle Integration now supports the RosettaNet business protocol for exchanging documents with trading partners. RosettaNet defines both e-commerce document and exchange protocols. RosettaNet is XML-based and defines message guidelines, business process interfaces, and frameworks for interactions between organizations. See About RosettaNet in <i>Using B2B for Oracle Integration 3</i> and RosettaNet Adapter Capabilities in <i>Using the RosettaNet Adapter in Oracle Integration 3</i>.	23.12
REST transport support	You can exchange inbound and outbound messages with trading partners over the REST transport in B2B for Oracle Integration. The REST transport is useful for trading partners that don't use EDI or RosettaNet and can exchange messages using web forms or WebUI. See REST Support and Manage B2B Trading Partners in <i>Using B2B for Oracle Integration 3</i>.	23.12
Support for new X12 versions	Support is provided for EDI X12 versions 4010 to 8040. All document types within each version are supported. See Business Protocols Supported in B2B for Oracle Integration in <i>Using B2B for Oracle Integration 3</i>.	23.12

October 2023 (23.10)


Common Features

Feature	Description	Minimum Version Required
Edit network access <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	You can restrict which networks have access to your Oracle Integration instance by configuring an allowlist (formerly known as whitelist). Only users from networks that meet the configured settings are allowed to access the integration instance. See Restrict Access to an Instance in <i>Provisioning and Administering Oracle Integration 3</i>.	23.10.1

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: - US Midwest, Chicago (ORD) - US West, Salt Lake City (AGA) See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .	N/A
Oracle Integration support in the OC3 realm	Oracle Integration is supported in the OC3 realm (Oracle Cloud Infrastructure US Federal Cloud with DISA Impact Level 5 Authorization) in the US DoD East (Ashburn) region. See About Oracle Integration 3 on Oracle Cloud Infrastructure US Government Cloud in <i>Using Oracle Integration 3 on Oracle Cloud Infrastructure US Government Cloud</i> .	23.08.02

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Double quotes are converted to single quotes in the Summary section that displays read-only text. (There is no impact to the actual expression in the actions.)	The behavior has changed when configuring expressions in actions in an integration (for example, routing branches in switch actions, assign actions, notification actions, and others). If you enclose expressions in double quotes (for example, you enter "TEST" in the Value field), they are automatically converted to single quotes ('TEST') in the Summary section at the top. This is the expected behavior and does not impact the actual value in the expression or runtime.	23.10.1

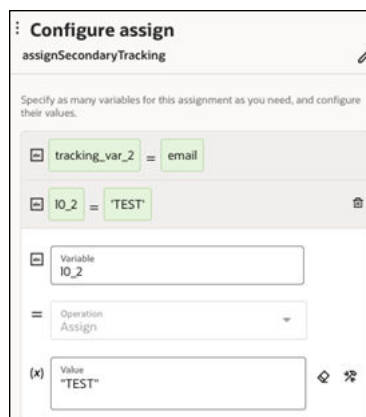

Feature	Description	Minimum Version Required
Observability pages enhancements	The Observability pages continue to be enhanced: - You can replay REST Adapter-triggered and AS2 Adapter-triggered integration instances that you configured as replayable during integration activation. See <i>Replay Integration Instances in Using Integrations in Oracle Integration 3</i>. - You can search for exact matches of business identifier values on the Instances page during runtime. See <i>Search for Business Identifier Values in Using Integrations in Oracle Integration 3</i>. - You can view detailed endpoint metrics for post-milestone activities in the activity stream. For example, the activity stream message shows that an invoked endpoint successfully received the message in a specific number of milliseconds. See <i>Track Integration Instances in Using Integrations in Oracle Integration 3</i>.	23.10
Certificate expiration alert in the banner	A notification alert icon is displayed in the banner that provides a link to the status of certificate expiration dates. When you click the link, the Certificate page opens with a filter set to show the soonest-to-expire certificates at the top. See <i>View Notification Alerts in the Banner in Using Integrations in Oracle Integration 3</i>.	23.10
Oracle Cloud Infrastructure object storage action enhancements	The Oracle Cloud Infrastructure object storage action has been enhanced to support the following features: - Ability to list the objects in a storage bucket - Ability to select the bucket for object management See <i>Invoke Oracle Cloud Infrastructure Object Storage from an Integration with an OCI Object Storage Action in Using Integrations in Oracle Integration 3</i>.	23.10
Event publishing and subscription enhancements	Event-based integrations have received the following enhancements: - Large payload support at runtime. See <i>Service Limits in Provisioning and Administering Oracle Integration 3</i>. - Retention of event subscriptions when deactivating an integration that subscribes to published events. This action enables you to begin receiving published events when you reactivate the integration. See <i>Retain an Event Subscription During Integration Deactivation in Using Integrations in Oracle Integration 3</i>.	23.10
Support for the for-each-group construct in the mapper	You can use a for-each-group construct to iterate across a series of groups. See <i>Iterate Across Groups with a for-each-group Constructor in Using the Oracle Mapper with Oracle Integration 3</i>.	23.10

Feature	Description	Minimum Version Required
Parallel action - Support for the B2B action	You can add a B2B action to a parallel action branch. See Process Tasks in Parallel with a Parallel Action in <i>Using Integrations in Oracle Integration 3</i> .	23.10
Private endpoint support for Oracle Fusion Applications adapters	You can configure the Oracle ERP Cloud Adapter, Oracle HCM Cloud Adapter, and Oracle CX Sales and B2B Service Adapter to connect to endpoints using a private virtual cloud network (VCN). See Configure the Endpoint Access Type in <i>Using the Oracle ERP Cloud Adapter with Oracle Integration 3</i> , Configure the Endpoint Access Type in <i>Using the Oracle HCM Cloud Adapter with Oracle Integration 3</i> , and Configure the Endpoint Access Type in <i>Using the Oracle CX Sales and B2B Service Adapter with Oracle Integration 3</i> .	23.10
OData Adapter - V4 and V2 Outbound Enhancements	The OData Adapter supports adding custom headers. You can add customer header values on the Request Headers page and/or Response Headers page. The OData Adapter also provides multilevel navigation support. See OData Adapter Capabilities in <i>Using the OData Adapter with Oracle Integration 3</i> .	23.10
PostgreSQL Adapter - Inbound polling without the connectivity agent	You can poll without use of the connectivity agent. Polling capabilities remain unchanged from previous releases, apart from connectivity agent selection on the Connections page. See PostgreSQL Adapter Capabilities and Perform Inbound Polling Without the Connectivity Agent in <i>Using the PostgreSQL Adapter with Oracle Integration 3</i> .	23.10
ServiceNow Adapter - Batch support	The ServiceNow Adapter supports CRUD (Create, Update, Get, or Delete) and file attachment (Download, Upload, Retrieve, or Delete attachment) batch operations. See ServiceNow Adapter Capabilities in <i>Using the ServiceNow Adapter with Oracle Integration 3</i> .	23.10
Azure Event Grid Adapter enhancements	The Azure Event Grid Adapter has been enhanced to support delivery properties (custom headers) for event data control; bulk operations to manage multiple events simultaneously; and dead lettering, subject filtering, advanced filtering, retry policies, and decoding and encoding for events. Subscription options for custom, system, and partner topics are also provided. Connectivity is also provided to the Azure Event Grid messaging system with both public and private access through the connectivity agent for publishing the events. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i> .	23.10

Feature	Description	Minimum Version Required
Oracle NetSuite Adapter - integration regeneration support	You can regenerate integration metadata as you add new custom fields in Oracle NetSuite. This capability eliminates the need to edit an endpoint in an integration. See Oracle NetSuite Adapter Capabilities in <i>Using the Oracle NetSuite Adapter with Oracle Integration 3</i>.	23.10
Azure Storage Adapter - New adapter	The Azure Storage Adapter enables you to create an integration that connects to the Azure Storage platform. You can perform Azure BLOB storage operations such as Put, Get, Delete, Copy, Abort, Lease, Snapshot, Set, and others. You can also perform Azure Container operations such as Create, Get, Delete, Lease, and Set. See Azure Storage Adapter Capabilities in <i>Using the Azure Storage Adapter with Oracle Integration 3</i>.	23.10
Microsoft Entra ID Adapter - New adapter	The Microsoft Entra ID Adapter enables you to create an integration that connects to the Azure Active Directory service. The Microsoft Entra ID Adapter supports using the connectivity agent to connect with all Azure Active Directory service offerings. The User, Organization, Application, and Groups business objects are supported. You can also perform operations such as Create, Update, Get, List, Delete, Add, Remove, and others on the selected business object. See Azure Active Directory Adapter Capabilities in <i>Using the Microsoft Entra ID Adapter with Oracle Integration 3</i>.	23.10
Azure Service Bus Adapter - New adapter	The Azure Service Bus Adapter allows you to connect to Azure Service Bus with both public and private access through the connectivity agent. You can consume or publish messages from or to an Azure Service Bus queue or topic. Topic subscription creation is supported. The Azure Service Bus Adapter also supports custom and standard headers. See Azure Service Bus Adapter Capabilities in <i>Using the Azure Service Bus Adapter with Oracle Integration 3</i>.	23.10
GitHub Adapter - New adapter	The GitHub Adapter enables you to create an integration that connects with GitHub. The GitHub Adapter supports performing operations such as Create, Update, Get, List, Delete, Compare, Search, Merge, and others on the selected business object. The GitHub Adapter authenticates trigger connections using composite security policies: HMAC (Hash-based Message Authentication Code) Signature Validation for incoming requests and OAuth 2.0 Authorization Code Credentials for outgoing calls. See GitHub Adapter Capabilities in <i>Using the GitHub Adapter with Oracle Integration 3</i>.	23.10

Feature	Description	Minimum Version Required
GCP Storage Adapter - New adapter	The GCP Storage Adapter enables you to create an integration that connects to Google Cloud Storage for storing different types of data. You can perform operations on/for buckets, objects, access controls, notifications, and others. You can also perform operations such as Create, Update, Get, List, Delete, Patch, and others on the selected resource. JSON support is provided for structured uploading and downloading of objects. Support is also provided for attachment upload and download. See GCP Storage Adapter Capabilities in <i>Using the GCP Storage Adapter with Oracle Integration 3</i>.	23.10
GraphQL Adapter - New adapter	The GraphQL Adapter enables you to integrate the GraphQL database residing behind the firewall of your on-premises environment through use of the on-premises connectivity agent. Use the GraphQL Adapter to integrate a cloud application that supports GraphQL. See GraphQL Adapter Capabilities in <i>Using the GraphQL Adapter with Oracle Integration 3</i>.	23.10
Salesforce Marketing Cloud Adapter - New adapter	The Salesforce Marketing Cloud Adapter enables you to create an integration in Oracle Integration that connects to the Salesforce Marketing Cloud platform. The Salesforce Marketing Cloud Adapter supports performing operations such as Create, Update, Delete and Retrieve. See Salesforce Marketing Cloud Adapter Capabilities in <i>Using the Salesforce Marketing Cloud Adapter with Oracle Integration 3</i>.	23.10
Confluent Adapter - New adapter	The Confluent Adapter enables you to create an integration that connects to a Confluent messaging system. The Confluent Adapter connects to the Confluent distributed publish-subscribe messaging system from Oracle Integration and allows for the publishing and consumption of messages from a Confluent Kafka topic. See Confluent Adapter Capabilities in <i>Using the Confluent Adapter with Oracle Integration 3</i>.	23.10
Oracle Primavera P6 EPPM Adapter - New adapter	The Oracle Primavera P6 EPPM Adapter enables you to integrate P6 EPPM with other Oracle or non-Oracle applications. See Oracle Primavera P6 EPPM Adapter Capabilities in <i>Using the Oracle Primavera P6 EPPM Adapter with Oracle Integration 3</i>.	23.10

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
Reprocess capability for B2B transactions	You can currently resubmit failed integrations using B2B for Oracle Integration. However, B2B environments typically require the need to resubmit down to the transactions level rather than just the integration level. With this release, you can now reprocess down to the B2B transaction level. You can reprocess both inbound and outbound B2B messages. Reprocessing is applicable for both failed and successful transactions. See <i>Work with Wire Messages</i> and <i>Work with Business Messages</i> in <i>Using B2B for Oracle Integration 3</i>.	23.10

File Server Features

Feature	Description	Minimum Version Required
Connect to File Server using a hostname	Now everyone can connect to File Server using File Server's hostname or IP address. A previous update provided this capability only to those who enabled File Server after the 23.08 update. Note: It could take up to 3 weeks after your instance is updated for the hostname to appear on the File Server Settings page. See <i>Configure File Server Settings</i> in <i>Using File Server in Oracle Integration 3</i>.	23.10

Feature	Description	Minimum Version Required
Configure a self-service allowlist	Creating an allowlist of public IP addresses for File Server is now faster than ever. You can manage the allowlist for File Server yourself in the Oracle Cloud Console. Previously, you had to open a service request to update your allowlist. See <i>Configure an Allowlist for Your Instance in Provisioning and Administering Oracle Integration 3</i>. Notes: - If you already have an allowlist for File Server, the allowlist appears in the Oracle Cloud Console a week or two after the update occurs. There is no interruption in service as a result of the allowlist becoming available in the Oracle Cloud Console. - If you had a File Server allowlist in Oracle Integration Generation 2 and upgraded to Oracle Integration 3, you must update your SFTP clients so that they use the new values. For details, see <i>Create an Allowlist for Public IP Addresses in Using File Server in Oracle Integration 3</i>.	23.10.1

August 2023


Common Features

Feature	Description	Minimum Version Required
Ingress IP address change	The inbound IP address for the Oracle Integration instance now appears on the About menu. If you have network egress rules to connect to Oracle Integration, add a new rule using the inbound IP address. Ensure that you do not delete any of the existing egress rules.	23.08
New recipe	The following new recipe has been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. Integrating Service Logistics with Field Service	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
OCI object storage action in the integration canvas	You can invoke Oracle Cloud Infrastructure object storage from an integration without the need to configure an explicit connection. This functionality enables you to manage objects (upload, download, and delete) and manage buckets (create, list, and delete) in the Oracle Cloud Console from your integration canvas. See Invoke Oracle Cloud Infrastructure Object Storage from an Integration with an OCI Object Storage Action and Manage Oracle Cloud Infrastructure Buckets and Objects from an Integration in <i>Using Integrations in Oracle Integration 3</i>.	23.08.2
Monitor event subscriptions	You can monitor event subscription integrations during runtime. See Monitor Event Subscription Integrations in <i>Using Integrations in Oracle Integration 3</i>.	23.08
Maintain business identifier definitions during trigger connection/scheduled integration changes	When a trigger connection or a scheduled integration parameter changes, business identifier definitions are not removed. Instead, the definitions are validated based on the changes. See Maintain Business Identifier Definitions During Trigger Connection/Schedule Integration Parameter Changes in <i>Using Integrations in Oracle Integration 3</i>.	23.08
Enable tracing when resubmitting an integration instance	When resubmitting an errored integration instance on the Errors page, you can change the level of tracing (production, audit, or debug) for the instance. Increasing this setting (for example, selecting Debug) lets you view more specific details about errors in the activity stream and downloaded logs and can aid in debugging errors in your instance. See Resubmit Failed Messages in <i>Using Integrations in Oracle Integration 3</i>.	23.08
Certificate expiration notification	You can configure alerts to be sent when certificates you uploaded on the Certificates page have expired or are set to expire within seven days. The check for certificate status is performed daily. See Configure Notification Emails in <i>Using Integrations in Oracle Integration 3</i>.	23.08

Feature	Description	Minimum Version Required
Project enhancements	Projects continue to be enhanced with new features: - Automatic merging of accelerator extensions at the project level during upgrade. This eliminates the need to manually merge each integration one by one. See Upgrade an Accelerator Project and Merge Extensions in <i>Using Integrations in Oracle Integration 3</i>. - Configuration editor support at the project level. This editor enables you to configure the dependent resources used by all integrations in a specific project. See Edit and Replace Dependent Resources in a Project in <i>Using Integrations in Oracle Integration 3</i>. - Accelerator extensibility updates to support invoke connections and the associated maps, ad-hoc maps, parent integration invocations of child integrations, and global variables. See Extend an Integration in an Accelerator Project in <i>Using Integrations in Oracle Integration 3</i>. - Viewing message processing status of your running integrations in a project (messages received and processed, successful messages and errors that occurred, and messages canceled). You can also view integration statistics (total counts and the minimum (quickest), maximum (slowest), mean, and standard (largest) deviation execution times of integrations over a selected time period). See Monitor the Message Processing Status of Integrations in Projects in <i>Using Integrations in Oracle Integration 3</i>.	23.08
Timeout session management	You can set the time limit for inactive sessions in an Oracle Integration instance. This setting automatically signs out a currently authenticated user after a specified period of inactivity. This setting impacts all the users of the instance and takes effect after a user signs out and signs back in. See Set the Time Limit for Inactive Sessions in <i>Using Integrations in Oracle Integration 3</i>.	23.08
Search for business identifier values that include special characters and white spaces	You can search for business identifier values that include special characters and white spaces on the Instances page. Simply wrap the values in double quotes. See Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	23.08

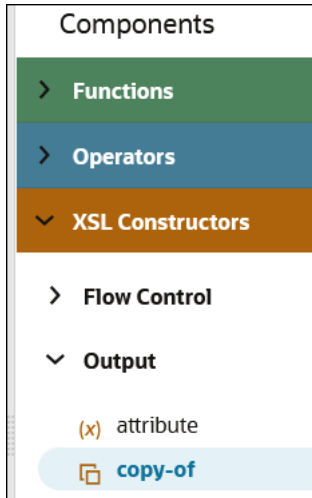Feature	Description	Minimum Version Required
Copy-of support in design mode in the mapper	You can automatically perform a deep copy of all child elements of a source parent node to the child elements of a target parent node in the mapper. This eliminates the need to individually map each source child element to each target child element.  The screenshot shows a 'Components' menu with several expandable sections: 'Functions' (green), 'Operators' (blue), 'XSL Constructors' (orange), 'Flow Control' (white), and 'Output' (white). The 'Output' section is expanded, showing a list of options: '(x) attribute' and 'copy-of' (highlighted in blue). The 'copy-of' option is represented by a small icon of two overlapping squares. See Perform a Deep Copy of Elements with a copy-of Constructor in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	23.08
Adapter Endpoint Configuration Wizard enhancements	The Adapter Endpoint Configuration Wizard has been enhanced. Some of the changes include the following: • The user interface has been updated to more reflect the Oracle Redwood look and feel. • The train at the top of each page has been removed. • Buttons at the bottom are always visible and do not require you to scroll to access. • Button names have changed. For example, previous step and next step icons have been replaced with Go back and Continue. • When a child page is opened, it is displayed similar to a pop-up window instead of opening in a separate page. That way, the parent page is always visible. • If you click Cancel, you are prompted with the opportunity to save your changes. • Excessive blank space has been reduced.	23.08
REST Adapter - AWS Signature Version 4 security policy support with the connectivity agent	You can use the AWS Signature Version 4 security policy with the connectivity agent. This policy is useful when you need to invoke AWS APIs that are available in on-premises environments. See Configure Connection Security in <i>Using the REST Adapter with Oracle Integration 3</i>.	23.08

Feature	Description	Minimum Version Required
SOAP Adapter, Apache Kafka Adapter, and Oracle Cloud Infrastructure Streaming Service Adapter - Private endpoint support	You can configure the SOAP Adapter, Apache Kafka Adapter, and Oracle Cloud Infrastructure Streaming Service Adapter to connect to endpoints using a private virtual cloud network (VCN). See Configure the Endpoint Access Type in <i>Using the SOAP Adapter with Oracle Integration 3</i>, Configure the Endpoint Access Type in <i>Using the Oracle Cloud Infrastructure Streaming Service Adapter with Oracle Integration 3</i>, and Configure the Endpoint Access Type in <i>Using the Apache Kafka Adapter with Oracle Integration 3</i>.	23.08
Apache Kafka Adapter and Oracle Cloud Infrastructure Streaming Service Adapter - Inbound polling support without the connectivity agent	You can poll without use of the connectivity agent. Polling capabilities remain unchanged from previous releases, apart from connectivity agent selection on the Connections page. - If the messaging service to access is in a private network, you must first configure private endpoint support in the Oracle Cloud Infrastructure and then select Private endpoint on the Connections page to poll without the connectivity agent. See Connect to Private Resources in <i>Provisioning and Administering Oracle Integration 3</i>. - If the database to access is public, private endpoint configuration is not required and the adapter polls directly without the connectivity agent.	23.08
OData Adapter - Version 4 outbound enhancements	The OData Adapter now supports OData version 4 to go along with the existing support for version 2. Version 4 enables you to use the JSON message format. See OData Adapter Capabilities in <i>Using the OData Adapter with Oracle Integration 3</i>.	23.08
Shopify Adapter - API version certification	The Shopify Adapter is certified to support API versions 2023-01 and 2023-04. See the Adapter Certification Matrix.	23.08
Oracle Utilities Adapter - OAuth Client Credentials support	The Oracle Utilities Adapter now supports OAuth Client Credentials in both the inbound and outbound directions for SOAP catalogs. This functionality is supported for both the public gateway (supporting secured WSDLs) and connectivity agent (supporting nonsecured WSDLs) access types. See Oracle Utilities Adapter Capabilities in <i>Using the Oracle Utilities Adapter with Oracle Integration 3</i>.	23.08
Oracle HCM Cloud Adapter - New Atom feeds support	The Oracle HCM Cloud Adapter supports new Atom feeds. See Oracle HCM Cloud Adapter Capabilities in <i>Using the Oracle HCM Cloud Adapter with Oracle Integration 3</i>.	23.08

Feature	Description	Minimum Version Required
SAP Ariba Adapter - Integration toolkit (ITK) deprecation	The SAP Ariba integration toolkit (ITK) has been deprecated. ITK has been replaced with the term task/event in the documentation. In addition, the Ariba ITK Authentication Policy field has been renamed to Shared Secret-based Authentication on the Connections page. See SAP Ariba Adapter Capabilities in <i>Using the SAP Ariba Adapter with Oracle Integration 3</i>.	23.08
PostgreSQL Adapter - Bulk data import operation and pagination support	The PostgreSQL Adapter has been enhanced to support bulk data import and pagination. The PostgreSQL Adapter also provides Secure Socket Layer (SSL) support through the connectivity agent. The PostgreSQL Adapter supports bulk data import for outbound invocations in Oracle Integration and enables you to import bulk data into a PostgreSQL database. See PostgreSQL Adapter Capabilities and Implement Common Patterns Using the PostgreSQL Adapter in <i>Using the PostgreSQL Adapter with Oracle Integration 3</i>.	23.08
Netezza Adapter - Bulk data import operation and pagination support	The Netezza Adapter now provides support for bulk data import and pagination for outbound invocations in Oracle Integration. You can import bulk data into a Netezza database. See Netezza Adapter Capabilities and Implement Common Patterns Using the Netezza Adapter in <i>Using the Netezza Adapter with Oracle Integration 3</i>.	23.08
FTP Adapter - Security enhancements	When configuring an sFTP connection, support for ECDSA host keys is provided. See Configure an sFTP Connection in <i>Using the FTP Adapter with Oracle Integration 3</i>.	23.08
Zuora Adapter - New adapter	The Zuora Adapter is a new addition to Oracle Integration's growing list of connectivity adapters. The Zuora Adapter provides inbound trigger and outbound invoke connection support for performing operations on business objects. Custom fields for REST APIs are also supported. See Zuora Adapter Capabilities in <i>Using the Zuora Adapter with Oracle Integration 3</i>.	23.08
Azure Event Grid Adapter - New adapter	The Azure Event Grid Adapter is another new addition to the enterprise messaging group of connectivity adapters in Oracle Integration. The Azure Event Grid Adapter enables you to create an integration in Oracle Integration that connects to an Azure Event Grid messaging service. The Azure Event Grid Adapter connects to the Azure Event Grid distributed publish-subscribe messaging system from Oracle Integration and provides for the publishing and consumption of messages from an Azure Event Grid topic/domain. The Azure Event Grid Adapter can be configured as a trigger and an invoke connection. See Azure Event Grid Adapter Capabilities in <i>Using the Azure Event Grid Adapter with Oracle Integration 3</i>.	23.08

Feature	Description	Minimum Version Required
GCP Pub Sub Adapter - New adapter	The GCP Pub Sub Adapter is a new addition to the enterprise messaging group of connectivity adapters in Oracle Integration. The GCP Pub Sub Adapter enables you to create an integration in Oracle Integration that connects to a GCP Pub/Sub messaging service. The GCP Pub Sub Adapter connects to the GCP Pub/Sub distributed publish-subscribe messaging system from Oracle Integration and provides for the publishing and consumption of messages to/from a GCP Pub/Sub topic. You can configure the GCP Pub Sub Adapter as a trigger or an invoke connection. See GCP Pub Sub Adapter Capabilities in <i>Using the GCP Pub Sub Adapter with Oracle Integration 3</i>.	23.08
Snowflake Adapter - Stored procedure support	The Snowflake Adapter enables you to execute stored procedures in the Snowflake database. See Snowflake Adapter Capabilities in <i>Using the Snowflake Adapter with Oracle Integration 3</i>.	23.08
ServiceNow Adapter - OAuth2.0 (two-legged) support	The ServiceNow Adapter now supports OAuth 2.0 two-legged authentication with the Resource Owner Password Credentials security policy. See ServiceNow Adapter Capabilities in <i>Using the ServiceNow Adapter with Oracle Integration 3</i>.	23.08
SAP ASE (Sybase) Adapter - SSL support	The SAP ASE (Sybase) Adapter provides support for using Secure Socket Layer (SSL). The SAP ASE (Sybase) Adapter provides one-way SSL for trigger and invoke connections. See Prerequisites for Creating a Connection and Configure Connection Properties in <i>Using the SAP ASE (Sybase) Adapter with Oracle Integration 3</i>.	23.08
Oracle Enterprise Performance Management Cloud Adapter <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	The Oracle Enterprise Performance Management Cloud Adapter enables you to connect to Oracle Enterprise Performance Management Cloud. This enables organizations to: • Simplify the close process in Oracle Financial Consolidation and Close Cloud and Oracle Tax Reporting Cloud • Streamline the close process through automation • Leverage first-in-class consolidation and tax reporting functionality See Oracle Enterprise Performance Management Cloud Adapter Capabilities in <i>Using the Oracle Enterprise Performance Management Cloud Adapter with Oracle Integration 3</i>.	23.08

File Server Features

Feature	Description	Minimum Version Required
Connect to File Server using a hostname	If you enable File Server after the 23.08 update, you can connect to File Server using File Server's hostname or IP address. Previously, the only option for connecting was using the IP address. See <i>Configure File Server Settings in Using File Server in Oracle Integration 3</i>. The hostname is not available for connecting if you enabled File Server before the update.	23.08

Visual Builder Features

Feature	Description	Minimum Version Required
Changed upgrade policy	Our upgrade policy has been changed to support applications built on the current runtime version as well as the <i>three</i> previous versions. Previously, it was the current runtime version and the <i>two</i> previous versions. See Upgrade Policy.	23.10

Feature	Description	Minimum Version Required
JavaScript action chains	You can now create action chains in JavaScript. JS action chains allow you to debug them using the browser's developer tools; they are also easier to manage through Git actions. A Design view that reflects code structure helps you build functionality by dragging and dropping actions; you can also choose to work entirely in Code view. With this update, all <i>new</i> action chains (including those created by Quick Starts) will default to JavaScript—though you can still create JSON action chains. Existing JSON action chains will continue to work as before. As a part of this update, you'll notice a few usability improvements: - List view for Actions palette The Actions palette in the Action Chains editor now has a new List view, in addition to the default Grid view, allowing you to view available actions alphabetically in each category. Customizing the view saves your palette preferences separately for each action chain. "Surround With" options When working with an action in Diagram mode, you can now use the Surround With options in an action's right-click menu to wrap the action in an If or Try-Catch action. - Code insights When working with an action in Code mode, you can now use Code Insight to quickly reference scoped artifacts and local variables. Simply enter \$ to bring up the insights pop-up menu, then make your auto-fill selection. See Work with JavaScript Action Chains.	23.10

Feature	Description	Minimum Version Required
Mobile apps deprecated	Mobile apps have been deprecated in favor of Progressive Web Apps (PWAs)—although mobile functionality won't be entirely removed from the product until July 2024. Starting with 23.10, you can no longer create a new mobile app, but you can import an existing mobile app and deploy it as a PWA for use on mobile devices. Functionality relating to hybrid mobile applications (deprecated since April 2021) has also been removed from the product. This means that the use of build configurations to build native <code>.ipa</code> and <code>.apk</code> files for distribution to iOS and Android devices—as well as the Cordova custom plug-in option—are no longer available. You can no longer create new hybrid mobile apps or new build profiles for existing apps; build configurations for existing apps will be ignored. For apps that target mobile devices, enabling PWA support is the recommended approach for distribution. See Run Mobile Applications as PWAs. You can continue to use your existing mobile apps until July 2024 when mobile apps (including PWA-enabled ones) reach End of Life (EOL). To be able to use your mobile PWAs beyond July 2024, we strongly urge you to transition your mobile app as a web app and deploy it as a PWA.	23.10
Improved diagnostics for IDCS client apps	We've made it easier for you to identify and troubleshoot issues with your visual application's client apps created in IDCS. A new IDCS Details tab, available under Application Profiles in the app-level Settings editor, provides details to help you inspect IDCS details and identify any configuration issues. See How Do I View Details of Client App in IDCS?	23.10

Feature	Description	Minimum Version Required
Variable enhancements	- Variable tracking to detect unsaved changes You can now track a variable's state to detect unsaved changes in your app. Tracking a variable marks it as "dirty" any time its value changes. You can then query for dirty variables using a new JavaScript-based Get Dirty Data Status action. If you don't want a change to be considered dirty, you can reset variable state using the Reset Dirty Data Status action (also based on JavaScript). See Track Variables to Detect Unsaved Changes. - Filter for input parameters A new Show Input Parameters only option on the Variables editor now allows you to filter variables used as input parameters. See Enable Variables as Input Parameters.	23.10

Feature	Description	Minimum Version Required
Fragment enhancements	- Slots in fragments A new Fragment Slot component, available in the Components palette, now allows you to add slots to a fragment where users can drop in their own content. A fragment with slots, when used on a page, reveals its slots on the canvas, the page structure, and as part of the fragment's properties. Fragment slots are similar to component slots and users work with them in much the same way. See Add Slots to a Fragment. - Autowiring of fragment variables To simplify the process of creating pages with fragments, we've added a new property for fragment variables enabled as input parameters to be automatically created on the page where the fragment is used and wired back to the fragment variable's value. See Automatically Create and Wire a Fragment Variable on Its Container. - Design Time support to display an enhanced UI for fragment input parameters A new Design Time tab in a fragment variable or constant's Properties pane now allows you to customize the UI component shown in the Properties pane when the fragment is selected on a page or container. Previously, you had to do this by editing the JSON metadata. See Customize How a Fragment Variable is Displayed in the Properties Pane. - Support to display fragment input parameters in sections You can now group a fragment's input parameters and dynamic components by sections using a new Design Time editor that appears in the fragment's toolbar. Use this option to display a fragment's most important properties in the Properties pane when the fragment is selected on a page or container. See Section Fragment Properties for Display in the Properties Pane. If the fragment is used as a page template to create a page, the sectioned view also shows on the page's Properties pane and the Structure view, with the fragment considered the root element instead of the page. See Create Pages From Fragments.	23.10

Feature	Description	Minimum Version Required
Service/backend enhancements	- Backends mandatory for new service connections If you're looking to create a <i>new</i> service connection by providing a specification document or an endpoint URL, you now need an existing backend to be able to create the service connection. If a backend doesn't exist, you'll be prompted to create one as part of the Create Service Connection workflow. With this update, all new service connections will require a backend. Making backends mandatory simplifies the task of managing server connection attributes, especially credentials, across environments. Service connections created previously without a backend will continue to work and their configuration settings can be changed as well. - Default service name change New service connections no longer include a default name. You can now specify your own service name for easier identification. See Create a Service Connection from the Catalog, Create a Service Connection from a Service Specification, and Create a Service Connection from an Endpoint.	23.10
Support for pinning columns in dynamic tables	You can now "freeze" table columns in dynamic tables, so that a column will remain visible when horizontally scrolling within a table. See Configure How Columns Render in a Dynamic Table's Layout .	23.10

Feature	Description	Minimum Version Required
Other enhancements	We've made several updates (including performance enhancements) to improve your design experience. Here are the key updates: - Multiple undo and redo options in the Designer When working in the Designer, you can now undo and redo multiple actions at one shot; previously, you could undo and redo only your most recent change. See Tour the Designer. - Audit improvements As a part of performance improvements to enhance application auditing, a new Opened Artifacts setting only audits artifacts that are currently open. To audit the entire application, change this setting to All Artifacts. Further, results in the Audits pane now show in a tree view, instead of a column view. With this change, issues are grouped by artifact, helping you view <i>all</i> issues in a particular artifact. See Audit Application Code.	23.10

July 2023

Common Features

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the Mexico Northeast, Monterrey (MTY) region. See <i>Availability in Provisioning and Administering Oracle Integration 3</i>.	N/A
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. Send Files from Oracle Cloud Infrastructure (OCI) Object Storage Service to Oracle Autonomous Transaction Processing (ATP) Create Sales Receipts in QuickBooks for Oracle NetSuite Invoices Create Sales Orders in Oracle NetSuite for Invoices in Magento Commerce Cloud Create Alerts in Microsoft Teams for Jira Issues Sync Orders Between Oracle CX Sales and B2B Service and Oracle E-Business Suite Sync Oracle NetSuite Items with QuickBooks Products See <i>Recipes and Accelerators</i> on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

June 2023

Common Features

Feature	Description	Minimum Version Required
Connect to private resources	You can now secure the traffic to private resources that are in your virtual cloud network (VCN) using a private endpoint. With a private endpoint, all traffic goes through a private channel that is set up within Oracle Cloud Infrastructure and never goes over the public internet. - Learn more about private endpoints in Connect to Private Resources in <i>Provisioning and Administering Oracle Integration 3</i>. - Discover the adapters that you can use to create connections that use a private endpoint in Adapters that Support Connecting to Private Endpoints in <i>Using Integrations in Oracle Integration 3</i>.	23.06
New recipes	The following new recipes have been added to Oracle Integration to help you jump start your integration development. Simply install, configure, and activate. Create Customer Records in Oracle ERP Cloud Post Slack Notifications for Stripe Charges Import Absence Records from Oracle HCM Cloud to Google Calendar Sync Stripe Customers with Salesforce Accounts Migrate Oracle Primavera Cloud Project Data	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
JDK 11 use with the connectivity agent	After November 15, 2023, Oracle Integration 3 connectivity agents running on JDK 11 will no longer be supported, and automatic upgrade will no longer be available for these connectivity agents. Upgrade to JDK 17. See System Requirements in <i>Using Integrations in Oracle Integration 3</i>.	N/A

Feature	Description	Minimum Version Required
Integration project enhancements	Integration projects continue to be enhanced with new features: - You can control the users and groups that edit, view, and monitor a project with role-based access control (RBAC). You select who can access a set of project resources while restricting (or hiding) those same resources from others (for example, providing an HCM group of users with access to some project resources while restricting an ERP group of users from accessing those same project resources). See <i>Control Who Can Edit, View, and Monitor in a Project</i> in <i>Using Integrations in Oracle Integration 3</i>. - You can clone projects and lookups. See <i>Clone a Project and Clone a Lookup in a Project</i> in <i>Using Integrations in Oracle Integration 3</i>. - You can add a for-each action to an extension group and add an extension group after an invoke connection. See <i>Extend an Integration in an Accelerator Project</i> in <i>Using Integrations in Oracle Integration 3</i>.	23.06
Large payload support	The supported sizes for payloads have increased for the following adapters: - The REST and SOAP SaaS-based adapters, Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Database Cloud Service Adapter, and FTP Adapter in the cloud can process 100 MB structured payloads and 50 MB payloads with the connectivity agent. - The stage file action can process 100 MB structured payloads. - Exceptions: - Non-Oracle database adapters can support 10 MB structured payloads for both the connectivity agent and the cloud. - Messaging adapters such as IBM MQ Series JMS Adapter, Oracle WebLogic JMS Adapter, Oracle Advanced Queuing (AQ) Adapter, Apache Kafka Adapter, and others can support 10 MB structured payloads. See <i>Service Limits</i> in <i>Provisioning and Administering Oracle Integration 3</i>.	23.06

Feature	Description	Minimum Version Required
Private endpoints - Adapter support	You can configure the REST Adapter, FTP Adapter, Oracle CPQ Adapter (REST-based APIs only), Oracle Autonomous AI Lakehouse (LH) Adapter, Oracle Autonomous AI Transaction Processing (ATP) Adapter, and Oracle Database Cloud Service Adapter to connect to endpoints using a private virtual cloud network (VCN). See Configure the Endpoint Access Type in <i>Using the REST Adapter with Oracle Integration 3</i>, Configure the Endpoint Access Type in <i>Using the FTP Adapter with Oracle Integration 3</i>, Configure the Endpoint Access Type <i>Using the Oracle CPQ Adapter with Oracle Integration 3</i>, Configure the Endpoint Access Type in <i>Using the Oracle Autonomous Data Warehouse Adapter with Oracle Integration 3</i>, Configure the Endpoint Access Type in <i>Using the Oracle Autonomous Transaction Processing Adapter with Oracle Integration 3</i>, and Configure the Endpoint Access Type in <i>Using the Oracle Database Cloud Service Adapter with Oracle Integration 3</i>.	23.06
Publishing and subscribing to events in integrations	You can create events in Oracle Integration and then publish those events in integrations. Once published, you can create an integration that subscribes to the events. See Create Integrations to Publish and Subscribe to Events and Publish Events in an Integration with a Publish Event Action in <i>Using Integrations in Oracle Integration 3</i>.	23.06
Observability section enhancements	The Observability section continues to be enhanced with new features: • View integration statistics. You can view the total counts and the minimum (quickest), maximum (slowest), mean, and standard (largest) deviation execution times of integrations over a selected time period on the Monitor integrations page. See Monitor the Message Processing Status of Integrations in <i>Using Integrations in Oracle Integration 3</i>. • Filter on the last updated or creation time of integration instances on the Errors and Instances pages. See View Error Messages and the Message Payload in the Activity Stream of Failed Instances and Filter the Display of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>. • Search for business identifier tracking variable values containing special characters or white spaces. See View Error Messages and the Message Payload in the Activity Stream of Failed Instances and Filter the Display of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>. • View large payload file metadata in the activity stream. See Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	23.06

Feature	Description	Minimum Version Required
Self-diagnosing Oracle Fusion Applications business event delivery - user interface enhancements	The Fusion Applications page has been updated with the following enhancements: - The Name column shows the connection name and its Oracle Fusion Applications hostname that was specified in the Properties section of the Connections page. This enables you to identify the host on which the event was generated. - The Project id column shows the name of the project to which a connection belongs. If the connection is not part of any project (known as a connection that is globally available), the column cell is empty. See Diagnose and Manage Event-Based Oracle Fusion Applications Integrations in <i>Using Integrations in Oracle Integration 3</i>.	23.06
Wait action - Synchronous integration support	You can add a wait action to a synchronous integration. See Delay Integration Processing for a Specified Time Period with a Wait Action in <i>Using Integrations in Oracle Integration 3</i>.	23.06
Oracle Autonomous AI Transaction Processing (ATP) Adapter, Oracle Autonomous AI Lakehouse (LH) Adapter, and Oracle Database Cloud Service Adapter - Inbound polling support without the connectivity agent	You can poll Oracle Autonomous Transaction Processing, Oracle Autonomous Data Warehouse, Oracle Database Cloud Service databases without use of the connectivity agent. Polling capabilities remain unchanged from previous releases, apart from connectivity agent selection on the Connections page. - If the database to access is behind a firewall, you must first configure private endpoint support in the Oracle Cloud Infrastructure and then select Private endpoint on the Connections page to poll without the connectivity agent. - If the database to access is public, private endpoint configuration is not required and the adapter polls directly without the connectivity agent. See Connect to Private Resources in <i>Provisioning and Administering Oracle Integration 3</i>. Note: The FTP Adapter, Oracle CPQ Adapter, and REST Adapter do not support inbound polling with private endpoints. See Perform Inbound Database Polling Without the Connectivity Agent in <i>Using the Oracle Autonomous Data Warehouse Adapter with Oracle Integration 3</i>, Perform Inbound Database Polling Without the Connectivity Agent in <i>Using the Oracle Autonomous Transaction Processing Adapter with Oracle Integration 3</i>, and Perform Inbound Database Polling Without the Connectivity Agent in <i>Using the Oracle Database Cloud Service Adapter with Oracle Integration 3</i>.	23.06

Feature	Description	Minimum Version Required
OData Adapter enhancements	The OData Adapter provides the following new features with this release: • On-premises support with the connectivity agent • JSON and ATOM-XML message formats support • Custom queries support with the Query operation • User interface enhancements See OData Adapter Capabilities in <i>Using the OData Adapter with Oracle Integration 3</i>.	23.06
IBM DB2 Adapter - AS400 support	The IBM DB2 Adapter is certified on AS400. See the Connectivity Certification Matrix.	23.06
Oracle Hospitality Adapter enhancements	The Oracle Hospitality Adapter endpoint configuration provides a new level of useability in which the available operations and their business objects are mapped dynamically according to what's available in OPERA Cloud for that user/application. You no longer need to specify JSON sample messages for request/response and endpoint URLs are no longer required. See Add the Oracle Hospitality Adapter Connection to an Integration in <i>Using the Oracle Hospitality Adapter with Oracle Integration 3</i>.	23.06

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
B2B for Oracle Integration	B2B for Oracle Integration continues to be enhanced with new features: • Support for creating and designing a B2B standalone mode integration. See <i>Use B2B for Oracle Integration in Standalone Mode</i> and <i>Design a B2B Standalone Mode Integration</i> in <i>Using B2B for Oracle Integration 3</i>. • Support for designing, managing, and monitoring a B2B standalone mode integration in a project. Trading partner mode is <i>not</i> supported in a project. See <i>About Integration Projects</i> and <i>Design, Manage, and Monitor Integrations in Projects</i> in <i>Using Integrations in Oracle Integration 3</i>. • Support for resubmitting messages to a trading partner (outbound) or a backend application (inbound). This is useful for scenarios in which you need to: – Resubmit B2B transactions in case of delivery failures to trading partners or downstream applications. – Resubmit successful exchanges because of special requests from trading partners or downstream systems, such as issues with data manipulation changes in integrations, and so on. See <i>Track B2B Messages</i> in <i>Using B2B for Oracle Integration 3</i>. • Support for specifying file name and directory values at runtime that can override design time transport property values in FTP outbound integrations. See <i>Define an FTP Transport and Specify File Name and Directory Name Values at Runtime for Outbound FTP Transport Integrations</i> in <i>Using B2B for Oracle Integration 3</i>.	23.06

May 2023

Common Features

Feature	Description	Minimum Version Required
Oracle Identity Cloud Service (IDCS) cross region support	For tenancies that use IDCS, you can now create the Oracle Integration 3 instance in a different region than your IDCS stripes.	23.04.1
Oracle Integration 3 on US Government Cloud	Oracle Integration 3 on US Government Cloud is now available in the following location: The West (Phoenix) region for the OC2 realm (Oracle Cloud Infrastructure US Government Cloud with FedRAMP Authorization) See <i>Get Started with Oracle Integration on Oracle Cloud Infrastructure US Government Cloud</i> in <i>Using Oracle Integration 3 on Oracle Cloud Infrastructure US Government Cloud</i>.	23.04
New region availability	Oracle Integration 3 is now available for provisioning in the following regions: - Serbia, Kragujevac (BEG) - EU Sovereign Central, Frankfurt (STR) - EU Sovereign South, Madrid (VLL) - US DoD East, Ashburn (RIC) - US Gov East, Ashburn (LFI) - US Gov West, Phoenix (LUF) See <i>Availability in Provisioning and Administering Oracle Integration 3</i>.	N/A
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. Export Items in Bulk from Oracle ERP Cloud to Shopify Export Items with Variants from Oracle ERP Cloud to Shopify Create Accounts in Oracle CX Sales and B2B Service for HubSpot Companies Import Segments from Oracle Unity to Salesforce Marketing Cloud Sync Customer and Campaign Data Between Oracle Unity and Salesforce Marketing Cloud See <i>Recipes and Accelerators</i> on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
B2B for Oracle Integration	New REST APIs have been added for document customization, monitoring, and trading partners. See What's New in <i>Developer API for Oracle Integration 3</i>.	23.04

Oracle Cloud Infrastructure Process Automation Features

Feature	Description	Minimum Version Required
Oracle Cloud Infrastructure Process Automation <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	Oracle Cloud Infrastructure Process Automation is now supported in Oracle Integration 3. With the Oracle Cloud Infrastructure Process Automation design-time (Designer) and the runtime (Workspace) environments, you can rapidly design, automate, and manage business processes in the cloud. When you use Oracle Cloud Infrastructure Process Automation with Oracle Integration, the power to integrate and work with cloud applications increases manifold in your process applications with access to integrations that are designed in Oracle Integration. See Use Process Automation with Oracle Integration 3 in <i>Using Oracle Cloud Infrastructure Process Automation</i>. To use Process Automation with Oracle Integration, you must first enable it with an Oracle Integration instance from the Oracle Cloud Console. See Enable Process Automation with Oracle Integration 3 in <i>Administering Oracle Cloud Infrastructure Process Automation</i>. The following Oracle Cloud Infrastructure Process Automation documentation is available in the Oracle Help Center: • What's New for Oracle Cloud Infrastructure Process Automation • Administering Oracle Cloud Infrastructure Process Automation • Using Oracle Cloud Infrastructure Process Automation • Developer API for Oracle Cloud Infrastructure Process Automation • Licensing Information User Manual for Oracle Cloud Infrastructure Process Automation	23.04.1

Insight Features

Feature	Description	Minimum Version Required
Insight capability	The Insight capability was previously available in Oracle Integration 3 for previewing purposes. The preview period has now ended, and Insight is no longer available in Oracle Integration 3.	N/A

April 2023

Common Features

Feature	Description	Minimum Version Required
JDK 17 support	The connectivity agent has been certified to support JDK version 17. Oracle recommends that you upgrade to version 17. Using the connectivity agent, you can create hybrid integrations and exchange messages between applications in private or on-premises networks and Oracle Integration. See System Requirements in <i>Using Integrations in Oracle Integration 3</i> .	23.04.1
Additional instances are ready for upgrade	Upgrades for additional adapters Instances containing integrations that use the following adapters can now be upgraded to Oracle Integration 3: • Oracle Intelligent Advisor Adapter • Oracle Intelligent Track and Trace Adapter • AS2 Adapter If your connections use identity certificates, you must complete some steps before and after the upgrade. See below. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>. Upgrades for instances with identity certificates Instances with identity certificates cannot be upgraded to Oracle Integration 3. However, a workaround is now available if you'd like to upgrade soon: Delete the identity certificate before the upgrade and then upload a new identity certificate after the upgrade. Identity certificates establish client identity during two-way SSL communication. You can create connections that use identity certificates based on the AS2 Adapter and the REST Adapter. You must complete some tasks before and after the upgrade. See Update Allowlists and Complete Pre-Upgrade Tasks and Complete the Post-Upgrade Tasks in <i>Provisioning and Administering Oracle Integration 3</i>.	23.04

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Export Employee Records from Workday to SAP • Import Documents from Salesforce to Adobe Sign • Import Segments from Oracle Unity to Salesforce Marketing Cloud See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Integration project enhancements	Integration projects continue to be enhanced with new features: - You can configure a parent integration in a project to invoke child integrations in other projects or outside of projects (known as globally available integrations). You can set which project integrations you want to make public (visible) for selection as child integrations in other projects. Setting a project integration as public enables that integration to be invoked by a parent integration in a different project. If you don't set a project integration as public, it can only be invoked by a parent integration in the same project. See Invoke Child Integrations Inside or Outside of Projects and Invoke a Child Integration from a Parent Integration. - You can extend (customize) an integration in an accelerator project by adding a switch action. See Extend an Integration in an Accelerator Project. - You can view the design-time audit log for a project. See View the Design-Time Audit Log of a Project. - You can view the instances under the Observe tab in chart view. See Track Instances in a Project. - You can create a new integration in a project on the Home page in either of two ways: - Select an existing project in which to include the integration. - Enter a new project name, which creates a new project that includes your integration. See Get Familiar with the Home Page. - You can convert an existing package and its resources (integrations, connections, lookups, and JavaScript libraries) to a project. See Convert a Package to a Project. - You can search on the last updated project by selecting Last updated from the Filter  on the Projects page. See About Integration Projects and Design, Manage, and Monitor Integrations in Projects in <i>Using Integrations in Oracle Integration 3</i>.	23.04
Self-diagnosing Oracle Fusion Applications business event delivery	You can self-diagnose the delivery of business events between Oracle Fusion Applications and Oracle Integration to determine where delivery problems occurred. See Diagnose and Manage Event-Based Oracle Fusion Applications Integrations in <i>Using Integrations in Oracle Integration 3</i>.	23.04

Feature	Description	Minimum Version Required
Observability pages enhancements	The Observability part of Oracle Integration has been enhanced with the following features: • The activity stream data available when you select the Debug (not recommended) option as your tracing level in the Activate integration panel is retained for 24 hours before being purged. However, you can view minimal details about the instances for up to 32 days in the Instances page and Errors page. See View Minimal Details About Debug Tracing Level Instances for 32 days. • The Monitor integrations page's filter has been enhanced to let you select the integration type (all integrations, only integrations in a project, or only integrations not in a project). If you select to show integrations in a project, you are prompted to begin entering the project name and select from the matching suggestions. See Monitor the Message Processing Status of Integrations. • The Connections with errors section on the Dashboard page enables you to click a section in the connection errors graph to access the Errors page. The Errors page lists the integration instances that use this connection. The connection name appears in the filtered search at the top of the Errors page. See View the Dashboard. • The Filter  on the Errors page and Instances page enables you to select the integration state (all, retained, or purged). See View Error Messages and the Message Payload in the Activity Stream of Failed Instances and Filter the Display of Integration Instances. • If you select the Errors by connection and the Errors by integration options on the Errors page, the Filter  shows errors alphabetically by name or by error count in descending order. See View Errors By Integration and Connection.	23.04
Invoke Oracle Cloud Infrastructure functions directly from an integration	You can directly invoke Oracle Cloud Infrastructure functions from an integration in the integration canvas. See Invoke Oracle Cloud Infrastructure Functions Directly from an Integration with an OCI Function Action in <i>Using Integrations in Oracle Integration 3</i>.	23.04
Expression support in wait actions	You can use the Expression Builder to configure the value for a wait action in an integration. The wait action enables you to delay the processing of an integration for a specified period of time. You can also continue to hard code the values. You can also override the value at runtime through use of an integration property. See Delay Integration Processing for a Specified Time Period with a Wait Action and Override Design-Time Properties in an Integration in <i>Using Integrations in Oracle Integration 3</i>.	23.04

Feature	Description	Minimum Version Required
Stage file action - Configure the segment size to a value greater than 200 records.	The Read File in Segments operation in the stage file action enables you to set a segment size larger than 200 records. See Configure a Stage File Action in Using Integrations in Oracle Integration 3 .	23.04
ServiceNow Adapter - OAuth Three-Legged Authorization Code Credentials security policy support	The ServiceNow Adapter supports REST APIs protected using OAuth 2.0 three-legged authentication with the Authorization Code Credentials security policy. See ServiceNow Adapter Capabilities in Using the ServiceNow Adapter with Oracle Integration 3 .	23.04
OData Adapter - New adapter	The OData Adapter (short for Open Data Protocol) enables you to integrate a cloud application that exposes data by OData services with Oracle Integration. See OData Adapter Capabilities in Using the OData Adapter with Oracle Integration 3 .	23.04
Primavera Unifier Adapter - New adapter	The Primavera Unifier Adapter enables you to set up a connection with Primavera Unifier or Unifier Essentials. This connection can integrate with Unifier and other Oracle and non-Oracle applications or endpoints. Use the Primavera Unifier Adapter to fetch, create, or update a Business Process (BP) record (without attachments) in Unifier. It provides for an easy selection of the BP needed for integration. See Primavera Unifier Adapter Capabilities in Using the Oracle Primavera Unifier Adapter with Oracle Integration 3 .	23.04
SAP S/4HANA Cloud Adapter - Client Certificate-based security policy support	The SAP S/4HANA Cloud Adapter supports SAP S/4HANA OData APIs protected using client certificate-based authentication. See SAP S/4HANA Cloud Adapter Capabilities in Using the SAP S/4HANA Cloud Adapter with Oracle Integration 3 .	23.04
PostgreSQL Adapter - Polling and SQL statement execution support	The PostgreSQL Adapter has been enhanced to support the following: - For trigger endpoints: - Support for polling new and updated records. - Support for a logical delete polling strategy. - Support for processing message payloads up to 10 MB in size. - For invoke endpoints: - Execution of DML statements such as Select, Insert, Update, and Delete using the Run a SQL Statement option. See PostgreSQL Adapter Capabilities in Using the PostgreSQL Adapter with Oracle Integration 3 .	23.04

Feature	Description	Minimum Version Required
Netezza Adapter - Stored procedure and polling support	The Netezza Adapter has been enhanced to support the following: - For trigger endpoints: - Support for polling new and updated records. - Support for a logical delete polling strategy. - Support for processing message payloads up to 10 MB in size. - For invoke endpoints: - Support for invocation of stored procedures. See Netezza Adapter Capabilities in <i>Using the Netezza Adapter with Oracle Integration 3</i>.	23.04
Oracle Intelligent Track and Trace Adapter <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	The Oracle Intelligent Track and Trace Adapter enables you to create an integration between Oracle Intelligent Track and Trace and Oracle Integration. See <i>Using the Oracle Intelligent Track and Trace Adapter with Oracle Integration 3</i> in Oracle Intelligent Track and Trace Adapter Capabilities.	23.04
Oracle Intelligent Advisor <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	Use the Oracle Intelligent Advisor in an integration to allow web interviews to trigger Oracle Integration integrations as the endpoints for data operations, and to allow Intelligent Advisor decision assessments to be invoked at any point in an integration. See Oracle Intelligent Advisor Adapter Capabilities in <i>Using the Oracle Intelligent Advisor Adapter with Oracle Integration 3</i>.	23.04

File Server Features

Feature	Description	Minimum Version Required
Support for additional algorithms	File Server now supports additional algorithms. The following RSA algorithms are available in the Signature Algorithms field on the File Server Settings page. - rsa-sha2-256 - rsa-sha2-512 The new algorithms are selected by default only if you've never saved the File Server Settings page. Otherwise, you must enable them if you want to use them. After enabling one or more new algorithms, you must update your known_hosts file, or a warning prevents you from connecting to File Server. See <i>Update the List of Supported Algorithms in Using File Server in Oracle Integration 3</i>.	23.04

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
B2B for Oracle Integration	B2B for Oracle Integration continues to be enhanced with new features: • Support for Open Applications Group Integration Specification (OAGIS) and custom XML documents and schemas. See Open Applications Group (OAGIS) Support, Custom XML Support, and Work with B2B Documents in <i>Using B2B for Oracle Integration 3</i>. • Support for setting the initial control numbers that get automatically incremented within the ISA and GS segments for each external trading partner. This eliminates the need to file a service request. See Create Trading Partners in <i>Using B2B for Oracle Integration 3</i>.	23.04

March 2023


Common Features

Feature	Description	Minimum Version Required
Tenancy migration to identity domains	Starting this month, Oracle begins a region-by-region migration of all tenancies to use identity domains. Tenancy owners will be notified two weeks prior to the migration of their tenancy. All IDCS instances in the tenancy will be converted at the same time regardless of the IDCS home region. Your tenancy already uses identity domains if Oracle updated your region to use identity domains <i>before</i> you created your tenancy. However, if Oracle updated your region to use identity domains <i>after</i> you created your tenancy, then your tenancy will be migrated. If you are not sure if your tenancy uses identity domains, see Differences Between Tenancies With and Without Identity Domains in <i>Provisioning and Administering Oracle Integration 3</i>. The migration to identity domains includes the migration of all users, groups, and roles. Once your tenancy has been migrated to use identity domains, subsequent maintenance of users, groups, and roles is done in Oracle Cloud Infrastructure Identity and Access Management (IAM). You will no longer use Oracle Identity Cloud Service (IDCS) or federation to manage users, groups, and roles. See Manage Access in an Identity Domain in <i>Provisioning and Administering Oracle Integration 3</i>.	N/A

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. - Create Customers in Magento for Oracle ERP Cloud Accounts - Import Absence Records from Oracle HCM Cloud to Microsoft Calendar - Import Candidate Records from an FTP Server to Taleo - Sync Customer and Campaign Data Between Oracle Unity and Salesforce Marketing Cloud See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A
Improved Recipes and Accelerators page in the Oracle Help Center	The Recipes and Accelerators page on the Oracle Help Center has been updated to provide two views: a card view and a list view. In both views, you can search on keywords to filter for only those recipes and accelerators of interest to you. The adapters used by each recipe are represented by product icons, which you can click to open the associated adapter documentation.	N/A

Oracle Integration 3

Recipes and Accelerators

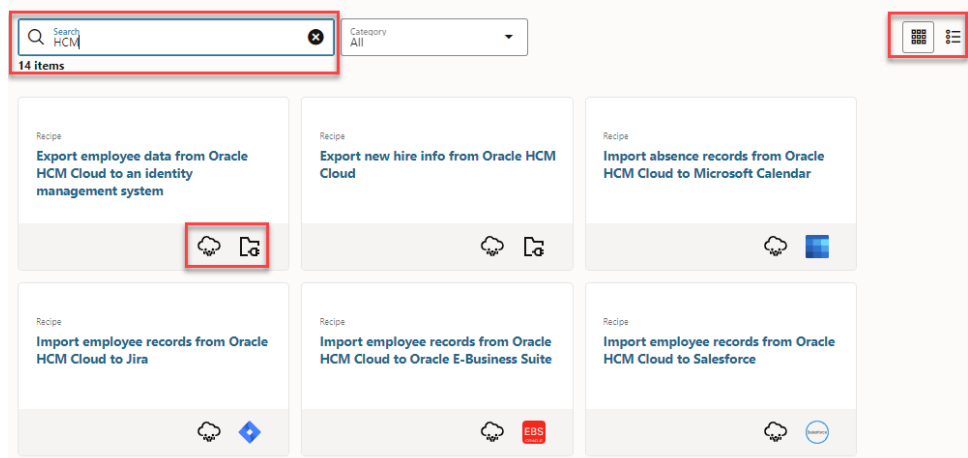

Visual Builder Features

Feature	Description	Minimum Version Required
Visual Builder support <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	New versions of Visual Builder are now supported in Oracle Integration 3. Use Visual Builder to quickly create and publish custom web and mobile applications using a visual development tool. Build the pages in your application using components that you place on a canvas, and integrate with other services. To use Visual Builder in Oracle Integration, you must first complete prerequisite tasks. See <i>Use Visual Builder in Oracle Integration in Provisioning and Administering Oracle Integration 3</i>. The following Visual Builder documentation is available on the Oracle Help Center: • <i>Administering Oracle Visual Builder in Oracle Integration 3</i> • <i>Developing Applications with Oracle Visual Builder in Oracle Integration 3</i> • <i>Developing Integrated Spreadsheets Using Oracle Visual Builder Add-in for Excel</i> • <i>Managing Data Using Oracle Visual Builder Add-in for Excel</i> • <i>Oracle Visual Builder Studio Page Model Reference</i> • <i>Accessing Business Objects Using REST APIs</i> Want to know the status of upgrading Visual Builder instances from Oracle Integration Generation 2 to Oracle Integration 3. See <i>Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in Provisioning and Administering Oracle Integration 3</i>.	23.02.2

February 2023

Common Features

Feature	Description	Minimum Version Required
Additional instances are ready for upgrade	The following Oracle Integration Generation 2 instances can now be upgraded to Oracle Integration 3: - Instances that use B2B for Oracle Integration. You must complete some steps before the upgrade, and be aware that your data retention settings impact whether you can upgrade. See Upgrade Considerations for Capabilities in <i>Provisioning and Administering Oracle Integration 3</i>. - Instances that use the connectivity agent. You must complete some steps before the upgrade. See Upgrade Considerations for Capabilities in <i>Provisioning and Administering Oracle Integration 3</i>. - Instances that use the Oracle Unity Adapter. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>. Note: During upgrade, the Generation 2 connectivity agent is automatically converted from using basic authentication to using OAuth 2.0 token-based authentication to invoke Oracle Integration endpoints. See Considerations for Capabilities in <i>Provisioning and Administering Oracle Integration 3</i>.	23.02
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. - Export Oracle NetSuite Records to QuickBooks - Import Absence Records from Oracle HCM Cloud to Microsoft Calendar Integrate Oracle Fusion Cloud SCM Master Data with Oracle MICROS Inventory Management Integrate Oracle MICROS Inventory Management with Oracle Fusion Cloud SCM for Order Processing Integrate Oracle Fusion Cloud HCM with Oracle MICROS Labor Management for Employee Creation Integrate Oracle MICROS Labor Management with Oracle Fusion Cloud HCM Time and Labor for Payroll Processing See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Integration project enhancements	Integration projects continue to be enhanced with new features: - You can create project deployments. During creation, you select the integrations and their specific versions to include. After creation, you can activate, deactivate, and export deployments. You can also edit, clone, and delete deployments of user-developed projects. See <i>Create and Manage a Project Deployment in Using Integrations in Oracle Integration 3</i>. - You can install recipe projects and accelerator projects from the Oracle Integration Store. - You can extend (customize) an integration in an accelerator project to process custom objects. See <i>Extend an Integration in an Accelerator Project</i>. - You can easily upgrade to a newer version of an accelerator project that is available in the Oracle Integration Store without losing your customizations. During upgrade, you are prompted to automatically merge any customizations that you made to your initial accelerator project into the newer version. See <i>Upgrade an Accelerator Project</i>. - You can search for integrations, connections, lookups, and JavaScript libraries in the project with the View all link at the bottom of each resource. You can also refine your search with the Filter  icon. - You can clone integrations, create new versions of an integration, view and edit the integration properties in integrations, and view a calendar of future scheduled integration runs. See <i>Clone an Integration in a Project</i>, <i>Create a Version of an Integration in a Project</i>, <i>Update Property Values of an Integration in a Project</i>, and <i>View the Scheduled Integration Runs Calendar in a Project</i>. - You can import user-developed, accelerator, and recipe projects into your instance. See <i>Create or Import a Project in Using Integrations in Oracle Integration 3</i>. - You can use the connectivity agent in integrations in a project. The connectivity agent manages all on-premises resources (credentials, artifacts) within the respective project or global (nonproject) context. The connectivity agent gets the project or global context information for each runtime and design-time request and reads resources, respectively. See <i>About Integration Projects and Design, Manage, and Monitor Integrations in Projects in Using Integrations in Oracle Integration 3</i>.	23.02

Feature	Description	Minimum Version Required
Large payload support	The connectivity agent has been enhanced to support SaaS-to-SaaS connectivity with 50 MB structured payloads (JSON and XML). See <i>Service Limits</i> in <i>Provisioning and Administering Oracle Integration 3</i> .	23.02
Dashboard and Error pages enhancements	The Observability part of Oracle Integration has been enhanced with the following features: - A Connections with error card is displayed on the Dashboard page. When you click this card, a graph of the connections with the most errors is displayed. See <i>View the Dashboard</i> in <i>Using Integrations in Oracle Integration 3</i>. - When a message is not accepted for resubmission on the Errors page, the Resubmission summary panel provides details about why this occurred. See <i>Resubmit Failed Messages</i> in <i>Using Integrations in Oracle Integration 3</i>.	23.02
Certificates page support for uploading signed key certificates	The Certificates page now enables you to upload signed key certificates. A common scenario for this certificate is when you must invoke a service that does not regard an OAuth client secret as secure. Instead, JWT assertions can be used to authenticate the client application without the use of a client secret. Oracle Integration instead uses the signing key to generate the JWT assertion. See <i>Upload an SSL Certificate</i> in <i>Using Integrations in Oracle Integration 3</i> and <i>Invoke a Service API with a JWT Assertion</i> in <i>Using the REST Adapter with Oracle Integration 3</i> .	23.02
Parallel action enhancements	The parallel action has been enhanced with the following features: - You can add scope, switch, logger, JavaScript, and notification actions inside a parallel action. - You can add a parallel action inside scope and switch actions. - If you attempt to add more than five branches to a parallel action, the menu option for adding a branch is disabled. See <i>Process Tasks in Parallel with a Parallel Action</i> in <i>Using Integrations in Oracle Integration 3</i> .	23.02
REST Adapter - JWT assertion support for outbound invocations	You may have a business need to invoke a service that does not regard an OAuth client secret as secure. For these scenarios, you can use JWT assertions. JWT assertions supplement all flavors of OAuth by authenticating the client application without the use of a client secret. See <i>JWT Assertion Support for Outbound Invocations</i> and <i>Invoke a Service API with a JWT Assertion</i> in <i>Using the REST Adapter with Oracle Integration 3</i> .	23.02

Feature	Description	Minimum Version Required
REST Adapter - RPST outbound security policy support	The REST Adapter supports the Resource Principal Session Token (RPST). RPST enables an Oracle Integration instance (the resource) to authenticate itself with and consume the resources of other Oracle Cloud Infrastructure service resources See Resource Principal Session Token Support and Invoke a Service Provider API with a JWT Assertion in <i>Using the REST Adapter with Oracle Integration 3</i>.	23.02
SOAP Adapter - OAuth Client Credentials and OAuth Authorization Code Credentials security policy support	SOAP Adapter invoke connections now support OAuth authentication with the addition of two new security policies: • OAuth Client Credentials • OAuth Authorization Code Credentials See Configure Connection Security and SOAP Adapter Capabilities in <i>Using the SOAP Adapter with Oracle Integration 3</i>.	23.02
Netezza Adapter - New adapter	The Netezza Adapter is the latest addition to the database group of adapters. The Netezza Adapter enables you to integrate Oracle Integration with a Netezza database residing behind the firewall of your on-premises environment through use of the on-premises connectivity agent. See Netezza Adapter Capabilities in <i>Using the Netezza Adapter with Oracle Integration 3</i>.	23.02
IBM MQ Series JMS Adapter - SSL support	You can configure the IBM MQ Series JMS Adapter to use SSL if your IBM MQ Series instance is SSL-enabled. See IBM MQ Series JMS Adapter Capabilities in <i>Using the IBM MQ Series JMS Adapter with Oracle Integration 3</i>.	23.02
SAP Concur Adapter - Regeneration support	The SAP Concur Adapter supports artifact regeneration. For example, when a new custom property is added in SAP Concur, you can view it in the mapper for an existing integration after clicking the SAP Concur Adapter and selecting Refresh Endpoints. See SAP Concur Adapter Capabilities in <i>Using the SAP Concur Adapter with Oracle Integration 3</i>.	23.02
SAP ASE (Sybase) Adapter - Bulk data import and pagination support	The SAP ASE (Sybase) Adapter supports the import of bulk data into an SAP ASE (Sybase) database. You can also implement pagination when fetching a large number of records for a Select query and receive sorted data in chunks. See SAP ASE (Sybase) Adapter Capabilities in <i>Using the SAP ASE (Sybase) Adapter with Oracle Integration 3</i>.	23.02

Feature	Description	Minimum Version Required
Oracle Unity Adapter <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	The Oracle Unity Adapter is the newest addition to the CX group of adapters in Oracle Integration 3. The Oracle Unity Adapter enables you to create an integration between Oracle Unity using Oracle Integration seamlessly without any complexities. See Oracle Unity Adapter Capabilities in <i>Using the Oracle Unity Adapter with Oracle Integration 3</i> .	23.02

File Server Features

Feature	Description	Minimum Version Required
Support for additional algorithms	File Server now supports additional algorithms. These algorithms are available in the Signature Algorithms field on the File Server Settings page. Previously, only the <code>ssa-rsa</code> algorithm was available. New EdDSA algorithm <code>ssh-ed25519</code> New ECDSA algorithms <code>ecdsa-sha2-nistp256</code> <code>ecdsa-sha2-nistp384</code> <code>ecdsa-sha2-nistp521</code> The new algorithms are selected by default only if you've never saved the File Server Settings page. Otherwise, you must enable them if you want to use them. After enabling one or more new algorithms, you must update your <code>known_hosts</code> file, or a warning prevents you from connecting to File Server. See Update the List of Supported Algorithms in <i>Using File Server in Oracle Integration 3</i>.	23.02

B2B for Oracle Integration Features

Feature	Description	Minimum Version Required
B2B for Oracle Integration support <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	B2B for Oracle Integration is now supported in Oracle Integration 3. B2B for Oracle Integration provides for the secure and reliable exchange of business documents between Oracle Integration and trading partners. Oracle Integration supports the EDI X12 and EDIFACT business protocols for the exchange of business documents between Oracle Integration and trading partners. See Introduction to B2B for Oracle Integration in <i>Using B2B for Oracle Integration 3</i>.	23.02

Feature	Description	Minimum Version Required
AS2 Adapter <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	The AS2 Adapter is now supported in Oracle Integration 3. Applicability Statement 2 (AS2) is a very popular HTTP-based protocol to transfer files or messages securely over the internet. AS2 is predominantly used in B2B communications to exchange electronic documents between companies. See AS2 Adapter Capabilities in <i>Using the AS2 Adapter with Oracle Integration 3</i>.	23.02

Visual Builder Features

Feature	Description	Minimum Version Required
Visual Builder support <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	New versions of Visual Builder are now supported in Oracle Integration 3. Use Visual Builder to quickly create and publish custom web and mobile applications using a visual development tool. Build the pages in your application using components that you place on a canvas, and integrate with other services. To use Visual Builder in Oracle Integration, you must first complete prerequisite tasks. See Use Visual Builder in Oracle Integration in <i>Provisioning and Administering Oracle Integration 3</i>. The following Visual Builder documentation is available on the Oracle Help Center: • <i>Administering Oracle Visual Builder in Oracle Integration 3</i> • <i>Developing Applications with Oracle Visual Builder in Oracle Integration 3</i> • <i>Developing Integrated Spreadsheets Using Oracle Visual Builder Add-in for Excel</i> • <i>Managing Data Using Oracle Visual Builder Add-in for Excel</i> • <i>Oracle Visual Builder Studio Page Model Reference</i> • <i>Accessing Business Objects Using REST APIs</i> Want to know the status of upgrading Visual Builder instances from Oracle Integration Generation 2 to Oracle Integration 3. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>.	23.02.2

January 2023

Common Features

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Import Customer Records from an FTP Server to Oracle ERP Cloud • Send WhatsApp Notifications to Oracle ERP Cloud Lead Owners Using Twilio • Import Documents from Oracle ERP Cloud to Adobe Sign See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

7

New Features for 2022

Review the new features for 2022.

Topics:

- [December 2022](#)
- [November 2022](#)
- [October 2022](#)
- [September 2022](#)
- [August 2022](#)

December 2022

Common Features

Feature	Description	Minimum Version Required
Additional instances are ready for upgrade	Oracle Integration Generation 2 instances that use File Server can now be upgraded to Oracle Integration 3. Additionally, instances that use the Oracle Responsys Adapter can also be upgraded. Previously, instances that used File Server or the Oracle Responsys Adapter were not ready for upgrade. See Upgrade from Oracle Integration Generation 2 to Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i> .	Latest version of Oracle Integration Generation 2
Stop and start an instance <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	You can now start and stop an Oracle Integration 3 instance. See Stopping and Starting an Instance in <i>Provisioning and Administering Oracle Integration 3</i> .	22.12
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Create Activities in Oracle Field Service for Oracle ERP Cloud Work Orders • Sync Contracts between SAP Ariba and Oracle ERP Cloud • Import a File into Oracle Content Management • Sync P6 Project Details with Primavera Cloud • Sync Primavera Cloud Project Details with P6 See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Project support in Oracle Integration	You can create integration projects in Oracle Integration. An integration project consists of self-contained assets (integrations, connections, lookups, and JavaScript libraries) bundled into a solution that can be developed, managed, and monitored as a single unit from a single workspace. A top-level Projects option is provided in the navigation pane. The Projects option includes all the necessary design, management, and monitoring tasks. You do not need to navigate to the Design and Observability options when working in a project workspace. All assets created in a project (integrations, connections, lookups, and JavaScript libraries) are visible and usable only in that project. This provides you with an uncluttered view; you only see the assets in which you are interested. See About Integration Projects and Designing, Managing, and Monitoring Integrations in Projects in <i>Using Integrations in Oracle Integration 3</i>.	22.12
Support for parallel actions in integrations	You can add parallel actions to integrations. A parallel action processes tasks in parallel to improve integration performance and response times. A parallel action allows the path of an integration to be split into multiple branches. Each branch is processed in parallel due to their independence from each other. Messages are sent to each service endpoint in parallel. When all tasks are completed, all branches are synchronized at their termination points in the parallel action and the main path of the integration is resumed. See Process Tasks in Parallel with a Parallel Action in <i>Using Integrations in Oracle Integration 3</i>.	22.12

Feature	Description	Minimum Version Required
Improved monitoring user experience	The Observability section continues to be improved: - The state of scheduled integrations is displayed in a label on the Monitor integrations page (for example, running, stopped, paused, and other states). Based on the state, applicable tasks are displayed under the Actions  menu (for example, if the scheduled instance state is stopped, selections for Edit Schedule, Run, Schedule, and Start Schedule are displayed). - The Filter  option on the Instances page now includes an Integration style option to search for all, app driven orchestration, or scheduled orchestration integrations. - Invoke messages for an instance have been consolidated into a single invoke milestone in the activity stream. You can expand the invoke milestone to display more specific details about invoke activities, such as message received, message sent to a local integration, message received by a local integration, and message processing completed. See Monitor the Message Processing Status of Integrations, Filter the Display of Integration Instances, and Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	22.12
Refresh integration endpoints	The Regenerate Artifacts option has been renamed to Refresh endpoints in the Actions  menu on the Integrations list page. In addition to refreshing integration endpoints on the Integrations list page, you can now also refresh endpoints directly from a Refresh endpoints  icon within the integration canvas. See Refresh Endpoints for Integrations in <i>Using Integrations in Oracle Integration 3</i>.	22.12
Snowflake Adapter - New adapter	The Snowflake Adapter is a new addition to the database group of adapters. The Snowflake Adapter enables you to integrate the Snowflake cloud database with Oracle Integration. The Snowflake Adapter supports bulk import of data from cloud storages such as Amazon Web Services (AWS), Microsoft Azure, and Google Cloud Platform (GCP) into the table of the Snowflake cloud database. Likewise, the Snowflake Adapter supports bulk export of data into cloud storages such as AWS, Azure, and GCP from the table of a Snowflake Cloud database. See Snowflake Adapter Capabilities in <i>Using the Snowflake Adapter with Oracle Integration 3</i>.	22.12

Feature	Description	Minimum Version Required
PostgreSQL Adapter - New adapter	The PostgreSQL Adapter is a new addition to the database group of adapters. The PostgreSQL Adapter enables you to integrate a PostgreSQL cloud database with Oracle Integration. The PostgreSQL Adapter also enables you to integrate a PostgreSQL database residing behind the firewall of your on-premises environment with Oracle Integration through use of the on-premises connectivity agent. See PostgreSQL Adapter Capabilities in <i>Using the PostgreSQL Adapter with Oracle Integration 3</i>.	22.12
Oracle Primavera Cloud Adapter - New adapter	The Oracle Primavera Cloud Adapter is a new addition to the industries group of adapters. Oracle Primavera Cloud brings together office and field teams, synchronizing schedules and resources and empowering the decisions that engineering and construction professionals make every day on projects through the world. The Oracle Primavera Cloud Adapter enables you to create an integration in Oracle Integration. The Oracle Primavera Cloud Adapter allows for connection setup between Oracle Primavera Cloud and other Oracle or third-party applications or endpoints. You can read a project schedule from Primavera Cloud in a single call, select the business objects needed for integration, map data across multiple business objects, read and write data in Primavera Cloud in a single call, and automatically create or update data without specifying if the data already exists. See Oracle Primavera Cloud Adapter Capabilities in <i>Using the Oracle Primavera Cloud Adapter with Oracle Integration 3</i>.	22.12
Workday Adapter - Authorization Code Credentials security policy support	The Workday Adapter supports the Authorization Code Credentials security policy. You register an API client in Workday to generate the client ID and client secret that you use to configure a connection. See Register an API Client to Use the Authorization Code Credentials Security Policy in <i>Using the Workday Adapter with Oracle Integration 3</i>.	22.12
Salesforce Adapter - Bulk 2.0 support	The Salesforce Adapter supports Bulk 2.0 operations. You can perform Create, Update, Upsert, Delete, and other operations on business objects supported by Salesforce. For example, you can process large data sets asynchronously with different Bulk 2.0 data operations or get successful, failed, and unprocessed records using the Bulk 2.0 operations. See Salesforce Adapter Capabilities in <i>Using the Salesforce Adapter with Oracle Integration 3</i>.	22.12
Jira Adapter - Trigger connection support for events	The Jira Adapter provides trigger connection support for the Project Created, Project Updated, and Project Deleted events. See Jira Adapter Capabilities in <i>Using the Jira Adapter with Oracle Integration 3</i>.	22.12

Feature	Description	Minimum Version Required
Oracle Responsys Adapter - Oracle Integration 3 support <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	Use the Oracle Responsys Adapter to extract customer profile data from customer relationship management, sales automation, and commerce applications. See Oracle Responsys Adapter Capabilities in <i>Using the Oracle Responsys Adapter with Oracle Integration 3</i> .	22.12

November 2022

Common Features

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the following regions. - Ashburn - Madrid - Queretaro See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .	22.10
Upgrade to Oracle Integration 3	Upgrades to Oracle Integration 3 have begun! When your instance becomes eligible for upgrade, you receive an email from Oracle about the timing. Resources in <i>Provisioning and Administering Oracle Integration 3</i> : - Get answers to your questions. See About the Upgrade Workflow and Upgrade FAQs. - Understand who's eligible for upgrade, and complete prerequisites. See Instances That Cannot Be Upgraded Yet and Complete Upgrade Prerequisites. - After you're eligible for upgrade, specify your upgrade requirements. See Schedule or Reschedule the Upgrade.	Latest version of Oracle Integration Generation 2

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Extract data from unstructured files using OCI Vision • Import employees from SAP SuccessFactors to Oracle E-Business Suite • Import employee records from Oracle HCM Cloud to Oracle E-Business Suite • Integrate Oracle MICROS Reporting and Analytics with ATP • Post Slack notifications for Oracle ERP Cloud purchase order approvals • View orders from Oracle ERP Cloud in Oracle CX Sales and B2B Service See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Customer tenancy use for notification emails	You can increase the number of emails you send in a rolling 24-hour window by using your own customer tenancy instead of the default method. The email limit allowed is determined by the Oracle Cloud Infrastructure Email Delivery Service. You also manage the approved senders and the suppression list from your customer tenancy. See <i>Configure Notification Emails and Monitor the Number of Emails Sent from Oracle Integration in Using Integrations in Oracle Integration 3</i>.	22.10
Improved monitoring user experience	The Dashboard page includes enhanced charts for instance status and design time. See <i>View the Dashboard in Using Integrations in Oracle Integration 3</i>.	22.10
View the calendar of scheduled integration runs	You can view the calendar of scheduled integration runs by day (by minute or hour), week, or month on the Future runs page. See <i>View the Scheduled Integration Runs Calendar in Using Integrations in Oracle Integration 3</i>.	22.10
JavaScript functions to implement hash-based message authentication code (HMAC) encryption	You can include crypto libraries in JavaScript actions in app driven orchestration integrations. Crypto libraries enable you to create functions to achieve HMAC encryptions. See <i>Write JavaScript in Using Integrations in Oracle Integration 3</i>.	22.10

Feature	Description	Minimum Version Required
Connectivity agent support for OAuth 2.0 token-based authentication	The on-premises connectivity agent now uses OAuth 2.0 token-based authentication when invoking endpoints in Oracle Integration. Basic authentication is <i>not</i> supported. Connectivity agent installation has also been simplified. Most installation parameters are now automatically configured for you and an OAuth client application is automatically created in Oracle Identity Cloud Service for facilitating OAuth 2.0 token-based authentication. See Create an Agent Group and Agent Download and Installation in <i>Using Integrations in Oracle Integration 3</i>.	22.10
View the reason for instance termination in the activity stream	The reasons for instance terminations are displayed in the activity stream for asynchronous and scheduled integrations. This provides you with a clear reason for why instances have been terminated. See View the Reason for Terminated Integration Instances in the Activity Stream in <i>Using Integrations in Oracle Integration 3</i>.	22.10
Microsoft Office 365 Calendar Adapter, Microsoft Office 365 People Adapter, and Microsoft Office 365 Outlook Adapter - Microsoft Outlook REST APIs unsupported	Microsoft has decommissioned the Microsoft Outlook REST APIs in November 2022. You must now use the Microsoft Graph REST APIs. See: • Invoke Operations Page in <i>Using the Microsoft Office 365 Calendar Adapter with Oracle Integration 3</i> • Invoke Operations Page in <i>Using the Microsoft Office 365 People Adapter with Oracle Integration 3</i> • Invoke Operations Page in <i>Using the Microsoft Office 365 Outlook Adapter with Oracle Integration 3</i>	22.10
simpleType element support in the REST Adapter	The REST Adapter supports schemas with simpleTypes having the restriction facet enabled. Both named and anonymous types are supported. See REST Adapter Capabilities in <i>Using the REST Adapter with Oracle Integration 3</i>.	22.10
Perform integration tasks in panels	The user interface for integration design continues to be redesigned to use panels that slide open on the right side of the page. Panels are now displayed when performing the following tasks: • Creating, importing, or cloning an integration, or creating a new version (draft) of an integration • Importing a library file • Importing, creating, or cloning a lookup See Create an Integration, Manage Integrations, Use JavaScript Libraries in Integrations, and Manage Lookups in <i>Using Integrations in Oracle Integration 3</i>.	22.10

Feature	Description	Minimum Version Required
Oracle WebLogic JMS Adapter - Filter out weighted distributed queues	The Oracle WebLogic JMS Adapter doesn't support weighted distributed queues. Oracle Integration filters out weighted distributed queues in order to ensure successful agent connectivity with the on-premises JMS WebLogic cluster. Oracle recommends that you use uniform distributed queues instead of weighted distributed queues. See Oracle WebLogic JMS Adapter Restrictions in <i>Using the Oracle WebLogic JMS Adapter with Oracle Integration 3</i>.	22.10
Local integration invocations handled separately in the activity stream	You can view a child integration being invoked by a parent integration in a separate activity stream. You can also view the separate activity streams for one integration that invokes another integration, which then invokes a child integration. Each activity stream is connected by a  button that provides easy access. See Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	22.10
SAP ASE (Sybase) Adapter <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	Oracle Integration 3 now supports the SAP ASE (Sybase) Adapter. The SAP ASE (Sybase) Adapter is the newest addition to the database group of adapters. The SAP ASE (Sybase) Adapter enables you to integrate with the SAP ASE database residing behind the firewall of your on-premises environment through use of the Oracle Integration on-premises connectivity agent. You can use the SAP ASE (Sybase) Adapter to poll for new and updated records for further processing in Oracle Integration. For example, any new row added to the Customer table in your SAP ASE database can be synchronized with a target CRM application with Oracle Integration. The SAP ASE (Sybase) Adapter also supports executing SQL queries and stored procedures in your SAP ASE database. See SAP ASE (Sybase) Adapter Capabilities in <i>Using the SAP ASE (Sybase) Adapter with Oracle Integration 3</i>.	22.10
Shopify Adapter - Access token authentication support <i>This Oracle Integration Generation 2 feature is now available in Oracle Integration 3.</i>	The Shopify Adapter now supports Shopify access token-based authentication. You must create a custom application in Shopify and provide the Admin API access token in the Shopify Adapter to successfully connect to the Shopify application. This is now necessary because Shopify deprecated private applications starting in January 2022 (therefore, the need to create a custom application). The Shopify Adapter is now certified with Shopify API version 2022-04. See Shopify Adapter Capabilities in <i>Using the Shopify Adapter with Oracle Integration 3</i>.	22.10

File Server Features

Feature	Description	Minimum Version Required
Increase in maximum concurrent connections	For File Server, the maximum number of concurrent connections per service instance has increased from 20 to 50.	22.10

October 2022

Common Features

Feature	Description	Minimum Version Required
New region availability	Oracle Integration 3 is now available for provisioning in the following regions. • Frankfurt • Johannesburg • London • Mumbai • Sao Paulo • Sydney See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .	22.08
New recipe	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Create activities in Oracle Primavera Cloud for Jira issues • Create Jira issues for project tasks in Oracle NetSuite • Import orders from Shopify to Oracle ERP Cloud • Integrate Oracle MICROS Reporting and Analytics sales data from ATP with Oracle Financials Accounting Hub • Import sales orders from Oracle NetSuite to Oracle Autonomous Data Warehouse • Read and write files on an FTP server See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

September 2022

Common Features

Feature	Description	Minimum Version Required
New workshops	The following LiveLabs workshops are now available: • Get Started with Oracle Integration 3 • Oracle Integration 3 - Cookbook - ERP Cloud Real Time Synchronization	N/A
New recipe	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. • Create project tasks in Oracle NetSuite for Jira issues • Get opportunity details from Oracle B2B Service • Export new hire info from Oracle HCM Cloud • Share YouTube video posts on socials • Sync email accounts between Okta and Oracle HCM Cloud • Sync employee identities between Oracle HCM Cloud and an LDAP instance • Sync work schedules between Workday and Oracle Field Service Cloud See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A
Logging activity stream data	Capturing the activity stream in the Oracle Cloud Console is now supported. This capability was previously available in Oracle Integration Generation 2. See Capture the Activity Stream in Oracle Cloud Console in <i>Provisioning and Administering Oracle Integration 3</i> .	22.08

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Automatic saving of mapper updates	Changes you make in the mapper are automatically saved, eliminating the need to click Validate or Save . See Save Changes Automatically in <i>Using the Oracle Mapper with Oracle Integration 3</i> .	22.08
Keyboard shortcuts	Keyboard shortcuts are available for use in the integration canvas. See Keyboard Shortcuts in the Integration Canvas and the Mapper in <i>Using Integrations in Oracle Integration 3</i> .	22.08

Feature	Description	Minimum Version Required
JavaScript file editor	You can edit JavaScript file code in Oracle Integration without the need to export the code to an external editor for editing. See Update JavaScript Files in Using Integrations in Oracle Integration 3 .	22.08
Filter the display of errors in the activity stream	You can filter the activity stream to quickly show error content only. This option can be useful for instances in which a logic action such as a for-each loop or while loop with many iterations has failed. This option enables you to jump quickly to the iteration that failed instead of scrolling through each iteration of the loop. See View Error Messages and the Message Payload in the Activity Stream of Failed Instances in Using Integrations in Oracle Integration 3 .	22.08
Separate display of HTTP headers and payload in the activity stream	The HTTP headers and payload in the activity stream are now displayed separately. This makes for an easier viewing experience. See Track the Status of Integration Instances in Using Integrations in Oracle Integration 3 .	22.08
Enforcement of 700 active integrations limit	You can activate up to 700 integrations per instance. When the limit is exceeded, you are prevented from activating additional integrations. See Activate an Integration and View the Dashboard in Using Integrations in Oracle Integration 3 .	22.08
NAT gateway IP address (outbound IP address) in the About menu	You can obtain the NAT gateway IP address (outbound IP address) of your Oracle Integration instance from the About menu. The outbound IP address is required to allowlist the instance. This feature eliminates the need to file a service request to obtain the outbound IP address. See Obtain the NAT Gateway IP Address of the Oracle Integration Instance in Provisioning and Administering Oracle Integration 3 .	22.0.8

August 2022

Common Features

Feature	Description	Minimum Version Required
New recipes	The following new recipes have been added to Oracle Integration 3 to help you jump start your integration development. Simply install, configure, and activate. Sync contacts between Salesforce and Oracle B2C Service Create JIRA issues for ServiceNow incidents See Recipes and Accelerators on the Oracle Help Center for a list of all Oracle Integration recipes.	N/A

Feature	Description	Minimum Version Required
Oracle Redwood theme	The Oracle Integration user interface reflects the Oracle Redwood look and feel. All screenshots, icons, and terminology has been updated in the Oracle Integration library accordingly.	22.06
Oracle Cloud Console Version information appears when applicable	The user interface for the Oracle Cloud Console shows version information, so you can tell the version of each instance, either Oracle Integration Generation 2 or Oracle Integration 3. Version information appears only if you have or can create instances for both versions. Find version information when you create an instance, view a list of instances, and view instance details.	22.06
Oracle Cloud Console Ability to provision an Oracle Integration 3 instance	If you are a new customer to Oracle Integration 3, you can provision an Oracle Integration 3 instance at any time. If you are an existing Oracle Integration Generation 2 customer, you can provision an Oracle Integration 3 instance only after Oracle upgrades at least one of your instances to Oracle Integration 3. Provision new instances in the Oracle Cloud Console.	22.06
Oracle Cloud Console Shape determines your upgrade window	When you create an instance in the Oracle Cloud Console, you must choose a shape, either Production or Development. The shape determines when the instance receives monthly and quarterly updates. Instances with a Development shape receive updates two weeks before instances with a Production shape. Note: You can't change the shape after you create the instance. However, you can move data to another instance using the export and import capabilities.	22.06
Oracle Cloud Console Real-time billing and usage data	Make informed decisions about the number of message packs to purchase, thanks to real-time billing and usage data that is now available in the Oracle Cloud Console. On the Metrics Explorer page, the new graphs show the number of messages that you purchased and that you've used. View data for a single instance or all instances in a compartment, and examine the data using sophisticated analysis tools. In Oracle Integration Generation 2, you monitored billable messages in the Oracle Integration interface, on the Usage Metrics page. The Usage Metrics page is no longer available; the data that was visible on the Usage Metrics page is now available in the Oracle Cloud Console. See Viewing Message Metrics in <i>Provisioning and Administering Oracle Integration 3</i> .	22.06

Feature	Description	Minimum Version Required
Oracle Integration Home page metrics	On the home page, you can see the total number of messages, total errors, and the number of failed integrations. You can also view existing integrations or create new ones from the home page and view recent activities with their status. You can select recipes or prebuilt integrations to solve your business needs and filter recipes by the applications they use. See <i>Get Familiar with the Home Page</i> in <i>Getting Started with Oracle Integration 3</i>.	22.06

Integration and Connectivity Features

Feature	Description	Minimum Version Required
Configuration Editor wizard	A new Configuration Editor wizard is provided that enables you to configure the resources to include in a standalone integration or package of integrations, such as connections, lookups, libraries, and PGP certificates. You can edit all resources and replace connections and PGP certificates. You can also unlock any locked resources within the wizard instead of navigating to the individual pages of the resources. See <i>Edit and Replace Dependent Resources</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Support for cutting and pasting elements in the integration canvas	You can cut and paste elements (actions and invokes) in the integration canvas. This enables you to move elements to other places in your integration and eliminates the need to recreate them. See <i>Cut and Paste Elements in the Integration Canvas</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Expandable and collapsible actions	You can expand and collapse logic actions in the integration canvas (for example, a scope, while, for-each, switch, and others) to see child actions and view errors. See <i>Expand and Collapse Actions in the Integration Canvas</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Menu simplification	The navigation pane has been simplified to include all tasks in three categories: Design, Observability (previously Monitoring), and Settings. See <i>Navigate Oracle Integration</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06

Feature	Description	Minimum Version Required
Managing integration components in panels	You now manage many integration components in a panel that slides open on the right side of the page, such as: • Designing integrations • Creating connections • Configuring adapter endpoints • Viewing the activity stream during runtime • Uploading certificates • Editing the email suppression list See <i>Create Application-Driven Orchestrated Integrations</i>, <i>Create a Connection</i>, <i>Understand Trigger and Invoke Connections</i>, <i>Track Integration Instances</i>, <i>Upload an SSL Certificate</i>, and <i>Remove Email Addresses from the Suppression List</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Control activity stream data retention during integration activation	When you activate an integration, you can select the tracing level. The level you select determines how long your data is available in the activity stream: • Production: 32 days • Audit: 8 days • Debug (Not recommended): 24 hours See <i>Activate an Integration</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Activity stream enhancements	The activity stream has received the following enhancements: • To improve performance, message payloads are accessible differently in the activity stream based on their size. • You can navigate to child integration instances on the Instance Details page. • Binary payloads can be downloaded from the activity stream. See <i>Understand Supported Activity Stream Payloads</i>, <i>Manage Errors</i>, and <i>Track Integration Instances</i> in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Instance ID change from integer to string	The system-generated instance ID that is displayed on the Instances page and in the activity stream for an integration instance has changed from an integer to a string. See Adapting to Instance ID Changes when Upgrading to Oracle Integration 3.	22.06

Feature	Description	Minimum Version Required
Scheduled integration enhancements	The scheduler has received the following enhancements: • Future integrations are displayed as queued and the time at which the integration is scheduled to run is listed on the Instances page and in the activity stream. • The user interface has been enhanced. For example, when you run a scheduled integration, the activity stream panel opens on the right side of the page to show instance progress. See Create Scheduled Integrations and Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Scheduled integration performance improvements	Changes to the scheduler implementation may result in shorter wait times for scheduled integrations to execute when compared to Oracle Integration Generation 2. See Service Limits in <i>Provisioning and Administering Oracle Integration 3</i>	22.06
Asynchronous integration regeneration	All integration regenerations are handled asynchronously. This reduces the chance for timeouts during regeneration. See Regenerate a WSDL File for Integrations in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Resubmission paths on Instance Details page	Resubmission paths for the looping iterations in logic actions such as a switch, for-each, while, and others are shown on the Instance Details page. See Track the Status of Integration Instances in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Instances page and Error page enhancements	• Activity stream messages can be selected inside looping iterations of logic actions such as a for-each, while, and switch. • The Instances page shows scheduled integrations waiting in the queue to run, along with the Scheduled on label and the time at which the queued integration is scheduled to run. • Failed integration instances can be resubmitted up to 10 times. See Track the Status of Integration Instances and Manage Errors in <i>Using Integrations in Oracle Integration 3</i>.	22.06
Mapper function, operator, and XSLT statement embedded help	Embedded online help for the mapper is provided. Click a specific function, operator, and XSLT statement in the mapper to show online help. See Get Online Help for Functions, Operators, and XSLT Statements in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	22.06

Feature	Description	Minimum Version Required
New mapper functions	Three new string functions are available for use in the mapper: • <code>matches</code>: Returns true if the supplied string matches a given regular expression. • <code>replace</code>: Returns a string created by replacing the given pattern with the <code>replace</code> argument. • <code>tokenize</code>: Returns a sequence of strings constructed by splitting the input whenever a separator is found. Click each function in the mapper to show online help that describes its signature, parameters, and return values. See Get Help for Functions in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	22.06
Test mapper enhancements	The test mapper supports the testing of mappings you created with tracking variables and local variables in assign actions. See Test Your Mappings in <i>Using the Oracle Mapper with Oracle Integration 3</i>.	22.06

8

Supported Browsers

Oracle Integration 3 supports the following browsers.

Application or system	Usage	Supported browsers
Oracle Cloud Console	To perform administrative tasks such as provisioning and administering your instance	Supported Browsers
Oracle Integration 3 user interface	To design, deploy, and monitor integrations and robots; automate business processes; provide real-time business visibility and analytics; build web and mobile applications; and more	Oracle Software Web Browser Support Policy Note: Oracle Integration supports JET version 13.
Environment where a robot runs	If you automate using a robot, the robot must run on a computer or virtual machine (VM). The robot can run on a variety of browsers.	System Requirements in <i>Using Robots in Oracle Integration 3</i>

Verify Updates and Feature Availability

You see the changes for a release only after your instance has been updated to the latest release *and* the feature is available in the realm where your instance is located.

Topics:

- [Check Whether Your Instance Has Been Updated](#)
- [Confirm that a Feature Is Available in Your Realm](#)
- [Confirm that a Feature Is Available in Your Region](#)

Check Whether Your Instance Has Been Updated

Updates are delivered to regions on a rolling schedule. Your instance might not be updated yet.

First, check the feature's minimum required version. Then, determine whether the latest update has been applied by checking the version in the About dialog box.

1. Check the feature's minimum required version.
 - a. In this guide, find the table that describes the feature.
 - b. Check the **Minimum Required Version** column.

This column contains the minimum version that your instance must have to use the feature.


Version numbers use the following convention: *YY.MM*, where *MM* is the month in which the version was released. For example, the **26.01** update occurred in January 2026.

Sometimes the version number includes a patch number, too. For example, **26.01.1** for a patch that was applied after the 26.01 release. Patches typically include bug fixes and security improvements.

Note

Some changes don't have a minimum required version. These changes are generally available to everyone, regardless of whether your instance has been updated to the latest release.

2. Determine whether the latest update has been applied.
 - a. In Oracle Integration, click your initials in the top pane, and then select **About**.
The About dialog appears.
 - b. Check the number next to **Version**.

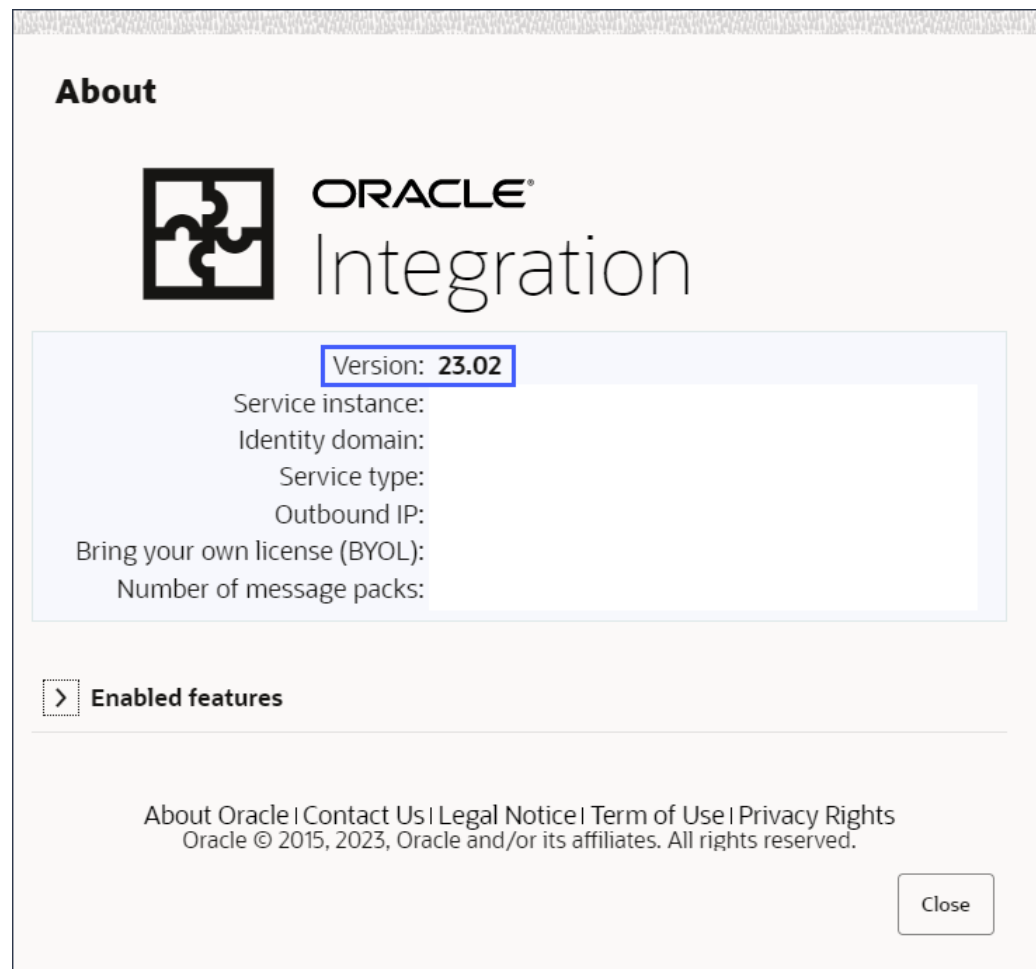

Note

Process Automation and Visual Builder have separate version numbers. You can follow these steps within either service to determine its version.

Confirm that a Feature Is Available in Your Realm

In general, new features are available in an instance when the instance is updated to the latest release. However, some realms experience a delay before they receive the new feature.

The delay is typically a few weeks or less. However, in rare cases, the delay is longer. The following table identifies the features that aren't yet available in specific realms. To learn more about realms, see [Regions and Availability Domains](#) in the Oracle Cloud Infrastructure (OCI) documentation.

Note

Disaster recovery features, OCI AI service actions, the new Home page, and the new look and feel for the Oracle Integration pages in the Oracle Cloud Console are currently available only in the OCI commercial realm.

Note

For information about the realms that receive pre-patching and post-patching notifications, see Updates to Your Instance in *Provisioning and Administering Oracle Integration 3*.

Realm	Realm key	Features that aren't available
OCI commercial realm	OC1	See Availability in <i>Provisioning and Administering Oracle Integration 3</i> .
Oracle US Government Cloud	OC2	See Feature Availability in <i>Using Oracle Integration 3 on Oracle Cloud Infrastructure US Government Cloud</i> .
Oracle US Defense Cloud	OC3	See Feature Availability in <i>Using Oracle Integration 3 on Oracle Cloud Infrastructure US Government Cloud</i> .
United Kingdom Government Cloud	OC4	- Using Process Automation in Oracle Integration - New look and feel for the Oracle Integration pages in the Oracle Cloud Console - OCI AI service actions - MCP gateway
Oracle Cloud for Australian Government and Defence	OC10	- Creating an event integration and using system events - Configuring a private endpoint - Disaster recovery features - New look and feel for the Oracle Integration pages in the Oracle Cloud Console - OCI AI service actions - MCP gateway
Dedicated Region Cloud Customer (DRCC) and Alloy	All DRCC and Alloy realms	- Development shapes - Disaster recovery features - New look and feel for the Oracle Integration pages in the Oracle Cloud Console - OCI AI service actions - MCP gateway

Confirm that a Feature Is Available in Your Region

In general, new features are available in an instance when the instance is updated to the latest release. However, some regions experience a delay before they receive the new feature.

For a list of regions and their feature availability, see Availability in *Provisioning and Administering Oracle Integration 3*.

Differences from Prior Versions of Oracle Integration

Features that are available in prior versions of Oracle Integration may not be available in Oracle Integration 3. These features may be permanently removed, replaced, enhanced, or not currently supported in Oracle Integration 3.

This page is updated when features become available in Oracle Integration 3.

- [Changes Between Oracle Integration Generation 2 and Oracle Integration 3](#)
- [Not Currently Available in Oracle Integration 3](#)
- [Not Supported in Oracle Integration 3](#)

Changes Between Oracle Integration Generation 2 and Oracle Integration 3

Audience	Features in Prior Versions of Oracle Integration	Equivalent or Enhanced Features in Oracle Integration 3
Administrator	User interface pages for: • Billed messages • Data retention	• Billed messages: Viewing and analyzing message data, processing and invocation times, adapter requests, and configured and consumed messages is performed in the Oracle Cloud Console. See Viewing Message Metrics and Billable Messages in <i>Provisioning and Administering Oracle Integration 3</i>. • Data retention: Database storage and management settings are now handled by Oracle. See Oracle and Customer Responsibilities in Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i>.
Administrator	Specifying how long to retain data and whether to purge data when low space is reached (available under Settings , then Data Retention in Oracle Integration Generation 2).	Oracle now handles this responsibility. See Oracle and Customer Responsibilities in Oracle Integration 3 in <i>Provisioning and Administering Oracle Integration 3</i> .
Administrator	Choosing the update window for an instance using tags.	The shape of an instance now determines its update window. For new instances created in Oracle Integration 3, the person who created the instance chooses the shape during provisioning. For instances that you upgrade from Oracle Integration Generation 2, an administrator chooses the shape while scheduling the upgrade.

Audience	Features in Prior Versions of Oracle Integration	Equivalent or Enhanced Features in Oracle Integration 3
Administrator	Creating an instance in a region other than your home region.	To create an Oracle Integration Generation 2 instance in a region other than your home region, you first had to subscribe to the region in the Oracle Cloud Console. For Oracle Integration 3 instances, the ability to create instances outside your home region depends on several factors. See <i>Restrictions in Provisioning and Administering Oracle Integration 3</i>.
Administrator	Custom endpoint.	In Oracle Integration 3, runtime access to your integrations will use the custom endpoint with no redirection. For all other access points—design-time, Oracle Visual Builder, Process Automation—you still access the custom endpoint, but the custom endpoint then redirects to the appropriate URL. If you used an SSL certificate with your custom endpoint in Oracle Integration Generation 2, you'll need to set up a load balancer as a front end for your service instance, and remove the SSL certificate. Currently, Oracle Integration 3 doesn't support alternate custom endpoints or using Oracle Visual Builder with a custom endpoint. See <i>Configure a Custom Endpoint for an Instance in Provisioning and Administering Oracle Integration 3</i>.
Administrator	The Reports section of the Notifications page includes selections for critical health alert, integration errors, hourly status, and daily status reports.	The Reports section of the Notifications page only includes selections for hourly and daily reports.
Developer	Activity stream download API and download option on the Integration dashboards page under the View menu.	The activity stream has been greatly enhanced and can be viewed and downloaded from the Instances page, Instance Details page, and Errors page.
Developer	In Oracle Integration Generation 2, the on-premises connectivity agent is certified with JDK 8, 11, and JDK 17.	In Oracle Integration 3, the on-premises connectivity agent must use JDK 17.

Note

To comply with Oracle security standards, JDK 8 and JDK 11 are deprecated. See [System Requirements](#).

Audience	Features in Prior Versions of Oracle Integration	Equivalent or Enhanced Features in Oracle Integration 3
Developer	When making an API call with the REST Adapter, you encode the integration identifier with %7C. For example: ORCL-BA-ERP_OPERA_TRIGG_SYNC%7C01.00.0000	When making an API call with the REST Adapter, you encode the integration identifier with a pipe () symbol. For example: ORCL-BA-ERP_OPERA_TRIGG_SYNC 01.00.0000
Developer	The system-generated instance ID that is displayed on the Instances page and in the activity stream for an integration instance is a numeric value.	The system-generated instance ID for an integration instance has changed from a numeric value to an alphanumeric value. This may affect any systems that you use that rely on the instance ID being a numeric value. For example, if you parse the instance ID from a REST API and store the instance ID in a database as a number field, you'll need to update the database field. The data type of the value in Oracle Integration remains unchanged and is a string. See Adapting to Instance ID Changes when Upgrading to Oracle Integration 3.
Developer	Integrations declared the policy information in the WSDL.	Integrations no longer declare the policy information in the WSDL. This impacts the Oracle Logistics Adapter and Oracle Transportation Management (OTM). To support this and any external WSDLs that do not declare an attached policy, but need to be accessed through a WSDL URL, configure the following properties: - Set the <code>glog.integration.webservice.enforceUNT</code> property to true to ensure that the user name and password are sent in an outbound SOAP message as the standard Web Service Security Username Token. - Set the Use Web Service Security option to on in the corresponding Web Service record. See Oracle Fusion Cloud Transportation and Global Trade Management.

Not Currently Available in Oracle Integration 3

Audience	Features in Prior Versions of Oracle Integration
Administrator	The following user interface pages under Settings, then Integrations: - Recommendations - API Management (API Platform option)

Audience	Features in Prior Versions of Oracle Integration
Developer	The following recipes: - CRM: Send documents from Salesforce to DocuSign Sync customer data between Loyalty Cloud and Responsys Sync orgs and contacts between B2C Service and Marketing Cloud - SCM: Integrate DiCentral with Fusion Cloud SCM Integrate KanbanBOX with Fusion Cloud SCM Note: Select another recipe from the Integration Store. See Recipes and Accelerators.
Developer	The Expression Builder is not available on the Configure Operation on Table page of the Adapter Endpoint Configuration Wizard for the following adapters: - IBM DB2 Adapter - Microsoft SQL Server Adapter - MySQL Adapter - Oracle Autonomous AI Lakehouse (LH) Adapter - Oracle Autonomous AI Transaction Processing (ATP) Adapter - Oracle AI Database Adapter - Oracle Database Cloud Service Adapter Use the SQL Query field on the same page to add any necessary parameters or arguments.

Not Supported in Oracle Integration 3

Audience	Features in Prior Versions of Oracle Integration	Alternatives in Oracle Integration 3
All	Insight capability	Use Oracle Log Analytics and Process Automation Analytics.
Administrator	Visual Builder instance administrator tasks: - Starting, stopping and deleting a Visual Builder instance. - Changing the node count. - Moving an instance to different compartment.	No alternative.
Administrator	B2B instance administrator tasks: Using tags to set an instance's update window	No alternative.
Administrator	The following UpdateIntegrationInstance parameter in the Oracle Integration Administrative API: alternateCustomEndpoints	No alternative.
Administrator	The REST API, command line interface (CLI) tool, and terraform script for creating an Oracle Integration instance include a parameter for enabling the file server. This parameter is not applicable in Oracle Integration Generation 3.	Enable the file server from the Oracle Cloud Console after creating the Oracle Integration instance.
Developer	Reporting incidents for problematic issues that occur during design time.	No alternative.

Audience	Features in Prior Versions of Oracle Integration	Alternatives in Oracle Integration 3
Developer	Basic routing integration style.	Create schedule or application integrations. Before you can upgrade from Oracle Integration Generation 2 to Oracle Integration 3, you must migrate your basic routing integrations to application integrations. If you attempt to manually import an exported Oracle Integration Generation 2 basic routing integration into Oracle Integration 3, it is automatically converted to an application integration.
Developer	File transfer integration style.	Create a schedule integration.
Developer	REST Adapter - Metadata Catalog URL, Swagger Definition URL, and RAML Definition URL connection types.	Developers with a REST API that is described using RAML or the Oracle metadata catalog must take the following action: 1. Consult your REST service provider and ask for a Swagger definition (if available). Oracle Fusion Applications should have a Swagger option available. This is a guideline for all Oracle Fusion Applications. 2. If an alternative spec is not available, use the basic template in the REST Adapter by selecting REST API Base URL as the connection URL and defining the target API request using the Adapter Endpoint Configuration Wizard. Another option is to convert RAML into an OpenAPI specification to use with the REST Adapter connection. To provide more robust and complete support for the Swagger/OpenAPI specifications, the REST Adapter includes a unified option to specify all OpenAPI specifications in a single field. This option also replaces the option to provide a Swagger definition URL, which is no longer available. See <i>Configure Connection Properties for Invoke Connections in Using the REST Adapter with Oracle Integration 3</i>.
Developer	The following adapters are not available in Oracle Integration 3: • Automation Anywhere Adapter • Evernote Adapter • Oracle Monetization Cloud Adapter • Oracle Taleo Business Edition (TBE) Adapter • UiPath Robotic Process Automation Adapter	For the Automation Anywhere Adapter and UiPath Robotic Process Automation Adapter, use the REST API-based approach available with the technical adapters. You can also select another adapter to use from our growing portfolio of hundreds of adapters. See <i>Adapters</i>. Additionally, robotic process automation (RPA) capabilities are also available in Oracle Integration 3. See <i>Learn About Robots and Build a Robot in Using Robots in Oracle Integration 3</i>.

Audience	Features in Prior Versions of Oracle Integration	Alternatives in Oracle Integration 3
Developer	Oracle NetSuite Adapter TBA authorization flow security policy support.	No alternative.
Developer	Delayed (asynchronous) response support in the following adapters: • Oracle CX Sales and B2B Service Adapter • Oracle ERP Cloud Adapter • Oracle HCM Cloud Adapter • Oracle Fusion Field Service Adapter • Salesforce Adapter • ServiceNow Adapter	No alternative. Note the following behavior in Oracle Integration 3: • For new integrations created in Oracle Integration 3 or upgraded integrations from Generation 2, create the following invoke connections to achieve delayed response functionality: – Create a simple invoke for success callbacks. – Create an additional invoke for failure callbacks under the fault handler to catch the correct fault.
Developer	The AS2 Adapter available in the Standard edition can only be used in standalone mode in <i>existing</i> integrations upgraded from Oracle Integration Generation 2 (for example, for file transfer protocol use cases not using B2B features).	Use the AS2 Adapter with B2B features such as the B2B action, B2B design time, and B2B runtime. These features require use of the Enterprise edition in Oracle Integration 3.
Developer	Use of basic authentication with the Oracle-provided REST APIs.	Use OAuth with the Oracle-provided REST APIs instead. For more information on authentication method support, see When is Basic Auth Supported in Oracle Integration 3. For more information on the Oracle-provided REST APIs, see APIs and CLI.
Developer	The Oracle Asserter testing framework for recording tests of integration instances and replaying them to reproduce potential issues.	No alternative for recording instances for replay. Use the Configure and run page to test REST Adapter trigger connection-based integrations and scheduled integrations. See Test REST Adapter Trigger Connection-Based Integrations and Run a Schedule Integration Immediately in <i>Using Integrations in Oracle Integration 3</i>.