

# Oracle® GoldenGate

## Logdump Reference Guide



26ai  
G49013-01  
January 2026



Copyright © 2013, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

**U.S. GOVERNMENT END USERS:** Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

Audience	i
Documentation Accessibility	i
Related Information	i
Conventions	i

## 1 Using the Logdump Utility

---

Getting Started with Logdump	1
Executing Basic Logdump Tasks	1
Finding the Next Good Record Header	1
Finding the Beginning, Middle, and End of a Transaction	1
Scanning for the End of a Transaction	2
Going to a Specific RBA in the File	2
Filtering Based on a Table or Data File Name	2
Removing the Current Filter Criteria	3
Filtering on Multiple Conditions	3
Count the Records in a Trail File	3
Saving Records to a New Trail File	3
Closing the Current File and Opening the Next One in the Trail	3
Checking Trail File Encryption and Decrypting a Trail File	3
Keeping a Log of Your Session	6
Seeing the Current Logdump Environment	7
Getting Online Command Help	7
To Exit Logdump	7
Evaluating Transaction Size	7
Maintaining Command History	8
Viewing Logdump Command Information and Syntax	8
Viewing the First Record	8
Running Logdump	8
Setting Up the View	8
Opening a Trail File	9

## 2 Logdump Commands

---

Logdump Command Summary	1
ARGETNONDATACHANGES   ARSTOPNONDATACHANGES	4
ASCIIDATA   EBCDICDATA	4
ASCIIDUMP   EBCDICDUMP	4
ASCIIHEADER   EBCDICHEADER	5
BEGIN	5
BULKIOSTATS	5
CALCTLFKEY	6
CD	6
COLUMNDATA	6
COMPUTETIMESTAMP	7
COUNT	7
CTIME	12
DATAFILE	12
DEBUG	13
DECRYPT	13
DETAIL	14
DUMP	14
ENCRYPT	15
ENV	15
ESBLOCK	16
EXIT	16
FC	17
FILEHEADER	18
FILES	25
FILTER	26
FLOAT	32
GGSAUDITREAD	33
GGSTOKEN	33
GGSTOKEN	35
GHDR	35
HASHCLEAR	35
HASHSTATS	36
HEADERTOKEN	36
HELP	37
HISTORY	37
INTERPRETINTERVAL	38
INTERPRETTIMESTAMP	38
LOG	39
Metadata ddlformat	39

Metadata defgenformat	40
Metadata detail	40
Metadata sqlformat	40
NEXT	40
NEXTTRAIL	41
NOTIFY	41
OBEY	41
OPEN	42
POSITION	43
RECLEN	43
SAVE	43
SCANFORENDTRANS	45
SCANFORHEADER	45
SCANFORMETADATA	45
SCANFORRBA	46
SCANFORTIME	46
SCANFORTYPE	47
SCANSROLLING	47
SHOW	48
SKIP	50
TIME	50
TIMEOFFSET	50
TMFBEFOREIMAGE	51
TMFBEFOREIMAGE	52
TMFGETRECADDR   NOTMFGETRECADDR	52
TMFIGNORERECCOUNT	52
TRAILFORMAT	52
TRANSBYTELIMIT	53
TRANSHIST	53
TRANSRECLIMIT	54
USERTOKEN	54
VOLUME	55
WRITELOG	55
X	55

# Preface

This guide contains guidelines for using the Oracle GoldenGate Logdump utility. This utility is mainly used by Oracle Support to resolve an Oracle GoldenGate support case. Experienced systems or database administrators who are familiar with the internal structures of Oracle GoldenGate trail records can use Logdump to troubleshoot and resolve errors or other problems encountered during processing.

## Audience

This guide is intended for the person or persons who are responsible for operating Oracle GoldenGate and maintaining its performance. This audience typically includes, but is not limited to, systems administrators and database administrators. It also is intended to help Oracle support technicians and other technical representatives when working with Oracle GoldenGate customers.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Accessible Access to Oracle Support

Oracle customers who have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Related Information

[Oracle GoldenGate Documentation](#)

[Oracle GoldenGate for Distributed Applications and Analytics](#)

[Oracle GoldenGate Studio Documentation](#)

[OCI GoldenGate](#)

[Oracle Database High Availability](#)

[Oracle GoldenGate Veridata](#)

## Conventions

The following text conventions are used in this document:

---

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, such as "From the File menu, select <b>Save</b> ." Boldface also is used for terms defined in text or in the glossary.
<i>italic</i>	Italic type indicates placeholder variables for which you supply particular values, such as in the parameter statement: TABLE <i>table_name</i> . Italic type also is used for book titles and emphasis.
monospace	Monospace type indicates code components such as user exits and scripts; the names of files and database objects; URL paths; and input and output text that appears on the screen. Uppercase monospace type is generally used to represent the names of Oracle GoldenGate parameters, commands, and user-configurable functions, as well as SQL commands and keywords.
MONOSPACE	
UPPERCASE	Uppercase in the regular text font indicates the name of a utility unless the name is intended to be a specific case.
{ }	Braces within syntax enclose a set of options that are separated by pipe symbols, one of which must be selected, for example: { <i>option1</i>   <i>option2</i>   <i>option3</i> }.
[ ]	Brackets within syntax indicate an optional element. For example in this syntax, the SAVE clause is optional: CLEANUP REPLICAT <i>group_name</i> [ , SAVE <i>count</i> ]. Multiple options within an optional element are separated by a pipe symbol, for example: [ <i>option1</i>   <i>option2</i> ].

---

# 1

# Using the Logdump Utility

Learn how to use the Logdump utility. This utility enables you to open files, control the display, navigate through a file, and search, filter, view, and save data that's stored in a trail or extract file.

## ! Important

To avoid any adverse effects on the data or checkpoints in your trails, use Logdump only with guidance from an Oracle support analyst or an experienced Oracle GoldenGate user.

This chapter includes the following sections:

## Getting Started with Logdump

This section introduces you to basic Logdump commands that enable you to open files, control the display, navigate through a file, and filter for specific information, among other basic tasks. It also illustrates and explains the components of a record.

## Executing Basic Logdump Tasks

The following are some basic tasks that can be performed with Logdump. For detailed information about the commands shown and other available options, see the alphabetical reference in [Logdump Commands](#).

### Finding the Next Good Record Header

To find the next good record header, enter the following command:

```
Logdump 8> SCANFORHEADER
```

Alternatively, you can simply enter SFH.

### Finding the Beginning, Middle, and End of a Transaction

To find the beginning, middle, and end of a transaction, complete the following steps:

1. Show headers and detail.

```
Logdump 9> GHDR ON  
Logdump 10> DETAIL ON
```

2. Go to the next record.

```
Logdump 11> N
```

3. View the `TransInd` field in the record header. The following table explains where the record is in relation to the transaction.

Transaction Indicator	Description
TransInd : . (x00)	First statement in transaction
TransInd : . (x01)	Statement in middle of transaction
TransInd : . (x02)	Last statement in transaction
TransInd : . (x03)	Sole statement in transaction

4. Move through subsequent records by pressing **N**, and refer to the `TransInd` field to determine where each one is within the transaction. When `TransInd` is either `x02` or `x03`, the `TransInd` of the next record should be `x00`, starting a new transaction.

## Scanning for the End of a Transaction

To scan for the end of a transaction, enter the following command:

```
Logdump 20> SCANFORENDTRANS
```

Alternatively, you can simply enter `SFET`.

The record shown will be the first one in the next transaction. To confirm, the `TransInd` field should be `x00`.

## Going to a Specific RBA in the File

To go to a specific RBA in the file, you can do either of the following:

- To go to an RBA anywhere in the file:

```
Logdump 35> POS rba
Logdump 36> N
```

This displays the record located at that RBA.

- To go to the first record in the file:

```
Logdump 37> POS FIRST
```

Alternatively, you can enter the following command:

```
Logdump 37> POS 0
```

## Filtering Based on a Table or Data File Name

To filter out everything except records containing a specific NonStop data file name, enter the following command:

```
Logdump 60> FILTER INCLUDE FILENAME $volume.subvolume.file
```

To filter out everything except records containing a specific table name:

- On a NonStop system:

```
Logdump 60> FILTER INCLUDE ANSINAME catalog.schema.table
```

- On a Windows or UNIX system:

```
Logdump 60> FILTER INCLUDE FILENAME [container | catalog] schema.table
```

Now, when you use the `N` command, you will only see records that satisfy this filter. Conversely, to filter out records containing a specific table or file name, but show everything else, use the `EXCLUDE` option instead of `INCLUDE`.

## Removing the Current Filter Criteria

To remove the current filter criteria, enter the following command:

```
Logdump 62> FILTER CLEAR
```

## Filtering on Multiple Conditions

To filter on multiple conditions, enter one of the following commands:

- Logdump 60> FILTER INCLUDE FILENAME \$volume.subvolume...file..; FILTER RECTYPE record\_type; FILTER MATCH ALL
- Logdump 60> FILTER INCLUDE ANSINAME catalog.schema.table; FILTER RECTYPE record\_type; FILTER MATCH ALL
- Logdump 65> FILTER INCLUDE FILENAME schema.table; FILTER RECTYPE record\_type; FILTER MATCH ALL

Use `MATCH ANY` or `MATCH ALL` depending on whether you want the search to match any or all of the filter conditions, respectively, when multiple conditions are specified. The preceding example filters on a name and record type, typically an operation type such as `INSERT`.

## Count the Records in a Trail File

The following command shows a count summary followed by counts for each table or data file:

```
Logdump 67> COUNT
```

## Saving Records to a New Trail File

To save a subset of records, enter the following command:

```
Logdump 68> SAVE file n RECORDS
```

## Closing the Current File and Opening the Next One in the Trail

To close the current file and open the next one in the trail, enter the following command:

```
Logdump 69> NEXTTRAIL
```

## Checking Trail File Encryption and Decrypting a Trail File

To read or check a trail file that is encrypted by OCI KMS, first setup the OCI KMS encryption profile correctly. To know more about encryption profile and how to set up an OCI KMS encryption profile, see [Apply the OCI KMS Encryption Profile for Extract](#).

Following are the steps to check if a trail file has been correctly encrypted and view the decrypted trail file.

**1. Set the following environment variables:**

- `OGG_VAR_HOME` and `OGG_ETC_HOME` environment variables to point to the `/var` and `/etc` directories of the corresponding Oracle GoldenGate deployment.

```
export OGG_VAR_HOME=/app/Deployment/var
```

```
export OGG_ETC_HOME=/app/Deployment/etc
```

- `OGG_SSL_HOME` environment variable to point to the `/ssl` directory of the Service Manager.

```
export OGG_SSL_HOME=/app/ServiceManager/etc/ssl
```

**2. Start `logdump`.**

```
shell> ./logdump
```

**3. Open the trail file.**

```
open /app/Deployment/var/lib/data/trail_name
```

For example:

```
Logdump 47> open /app/Deployment/var/lib/data/tt000000001
```

Output:

```
Current log trail file is /u02/Deployment/var/lib/data/tt000000001.
```

**4. Set `decrypt on` state for the encryption profile. This would allow you to see the decrypted data in the trail file.**

```
decrypt on profile encryption_profile
```

For example:

```
Logdump 48> decrypt on profile OCIKMSTEST
```

If the encryption profile has been setup correctly, you will see a message similar to the following in `logdump`:

```
Using encryption profile: OCIKMSTEST
```

```
2023-06-07 23:06:20 INFO OGG-25207 Loading master encryption key from Key Management System 'ocikms'.
```

```
2023-06-07 23:06:20 INFO OGG-25851 Using encryption profile 'OCIKMSTEST'.
```

5. Use the detail data and n commands to view the decrypted trail file. The detail data command displays data with hex and ASCII data values in the column list.

```
Logdump 49>detail data
Logdump 51>n
```

Following is the a sample excerpt of the trail file:

```
Logdump 52>n
```

```
2023/04/04 18:56:45.205.816 Metadata Len 382 RBA 4545
Table Name: WPDB.U1.TCUSTMER
*
 1)Name      2)Data Type      3)External Length 4)Fetch Offset
 5)Scale      6)Level
 7)Null      8)Bump if Odd      9)Internal Length 10)Binary Length
11)Table Length 12)Most Sig DT
13)Least Sig DT 14)High Precision 15)Low Precision 16)Elementary Item
17)Occurs      18)Key Column
19)Sub DataType 20)Native DataType 21)Character Set 22)Character Length
23)LOB Type      24)Partial Type
25)Remarks
*
TDR version: 11
Definition for table WPDB.U1.TCUSTMER
Record Length: 78
Columns: 4
CUST_CODE 64      4      0 0 0 0 0      4      4      0 0 0 0 0 1
0 1 0 1      -1      0 0 0
NAME       64      30      10 0 0 0 0      30      30      0 0 0 0 0 1
0 0 0 1      -1      0 0 0
CITY       64      20      46 0 0 0 0      20      20      0 0 0 0 0 1
0 0 0 1      -1      0 0 0
STATE      0       2      72 0 0 0 0      2       2      0 0 0 0 0 1
0 0 0 96      -1      0 0 0
End of definition
```

```
Logdump 57> n
```

```
Oracle RBA : 0x000091.00018942.0010
```

```
2023/04/04 18:56:42.000.000 Insert Len 86 RBA 4994
Name: WPDB.U1.TCUSTMER (TDR Index: 1)
After Image: Partition x0c
G b
0000 0800 0000 0400 3030 3030 0100 2200 0000 1e00 | .....0000..".....
6e4f 4f43 7678 7947 6f74 456d 766c 7a4d 4543 4262 | n00CvxyGotEmvlzMECBb
6f43 5751 506d 7766 7569 0200 1800 0000 1400 4956 | oCWQPmwfui.....IV
4f5a 5849 4e44 5542 4b49 4256 4e43 4a48 4f57 0300 | OZXINDUBKIBVNCJHOW..
0400 0000 595a | ....YZ
Column 0 (0x0000), Length 8 (0x0008).
0000 0400 3030 3030 | ....0000
```

```

Column 1 (0x0001), Length 34 (0x0022).
0000 1e00 6e4f 4f43 7678 7947 6f74 456d 766c 7a4d | ....n00CvxyGotEmvlzM
4543 4262 6f43 5751 506d 7766 7569 | ECBboCWQPmwfui
Column 2 (0x0002), Length 24 (0x0018).
0000 1400 4956 4f5a 5849 4e44 5542 4b49 4256 4e43 | ....IVOZXINDUBKIBVNC
4a48 4f57 | JHOW
Column 3 (0x0003), Length 4 (0x0004).
0000 595a | ..YZ

```

Logdump 58>n

```

2023/04/04 18:56:45.219.345 Metadata Len 644 RBA 5304
Table Name: WPDB.U1.TCUSTORD
*
 1)Name      2)Data Type      3)External Length 4)Fetch Offset
 5)Scale      6)Level
 7)Null      8)Bump if Odd      9)Internal Length 10)Binary Length
11)Table Length 12)Most Sig DT
13)Least Sig DT 14)High Precision 15)Low Precision 16)Elementary Item
17)Occurs      18)Key Column
19)Sub DataType 20)Native DataType 21)Character Set 22)Character Length
23)LOB Type      24)Partial Type
25)Remarks
*
TDR version: 11
Definition for table WPDB.U1.TCUSTORD
Record Length: 182
Columns: 7
CUST_CODE      64      4      0 0 0 0 0      4      4      0 0 0 0 0
1 0 1 0      1      -1      0 0 0
ORDER_DATE      192      19      10 0 0 0 0      19      19      19 0 5 0 0
1 0 1 0      12      -1      0 0 0
PRODUCT_CODE      64      8      32 0 0 0 0      8      8      0 0 0 0 0
1 0 1 0      1      -1      0 0 0
ORDER_ID      64      50      46 0 0 0 0      50      50      50 0 0 0 0
1 0 1 2      2      -1      0 0 0
PRODUCT_PRICE      134      10      102 2 0 0 0      8      8      8 0 0 0 0
1 0 0 3      2      -1      0 0 0
PRODUCT_AMOUNT      134      8      114 0 0 0 0      8      8      8 0 0 0 0
1 0 0 3      2      -1      0 0 0
TRANSACTION_ID      64      50      126 0 0 0 0      50      50      50 0 0 0 0
1 0 0 2      2      -1      0 0 0
End of definition

```

## Keeping a Log of Your Session

To start logging, enter the following command:

```
Logdump 70> LOG TO filename.txt
```

To write text to the log:

```
Logdump 71> WRITELOG "text"
```

To stop logging:

```
Logdump 72> LOG STOP
```

## Seeing the Current Logdump Environment

To see the current Logdump environment, enter the following command:

```
Logdump 73> ENV
```

This shows which features are enabled, such as filtering and header views, and it shows environment information such as the current trail and position.

## Getting Online Command Help

To get online command help, enter the following command:

```
Logdump 74> HELP
```

## To Exit Logdump

To exit Logdump, enter either of the following commands:

- Logdump 100> EXIT
- Logdump 100> QUIT

## Evaluating Transaction Size

Use Logdump's TRANSHIST command in conjunction with other Logdump commands to determine whether or not your applications generate large transactions and to identify their relative size. TRANSHIST causes Logdump to track the size of transactions contained in a trail file or extract file in an internal history table. The transactions are ranked in descending order of size, in bytes. When the history table is full, the smallest transaction is removed to allow a larger transaction to be added to the list.

To use statistics generated by TRANSHIST, issue the following series of commands in Logdump:

1. Use TRANSHIST to set the size of the history table that tracks transaction size. The maximum size is 200 bytes. A value of 0 turns off the tracking.

```
TRANSHIST n
```

2. Use either the TRANSRECLIMIT or TRANSBYTELIMIT command to set a lower boundary for what is considered a normal sized transaction. These commands prevent normal-sized transactions from being tracked. Eliminating normal-sized transactions reduces the amount of data that must be reviewed.

```
{TRANSBYTELIMIT n bytes | TRANSRECLIMIT n records}
```

3. Use Logdump's COUNT command to display the statistics on transaction size, which appear at the end of the output and look like the following excerpt:

```
Transactions with at least 100 records or 100000 bytes
2011/02/01 09:31:24.000.000 00:00:00.000, Seq 0, RBA 13101
    Bytes/Trans ..... 1168167
    Records/Trans ... 1001
    Files/Trans ..... 1
2011/02/01 09:31:35.000.000 00:00:11.000, Seq 0, RBA 1205292
    Bytes/Trans ..... 1168167
```

Records/Trans ...	1001
Files/Trans .....	1

Logdump scans the file(s) and reports the information.

4. Use Logdump's POSITION RBA command to go to each RBA listed in the COUNT output to find out the name of the table that generated the transaction. You can group these tables into their own processing group so that they do not affect processing of other tables that generate normal sized transactions.

## Maintaining Command History

On Windows and UNIX systems, command history is stored in a file named `logdump.hst`. On NonStop systems, command history is stored in a file named `logduhst`. The file is created in the home location of the user who first started Logdump.

When Logdump starts up, it looks for the history file in one of the following locations, depending on the platform:

- The `USERPROFILE` environment variable.
- The `$HOME` environment variable.
- The default `$vol.subvol`.

If the file exists, Logdump loads the command history into a buffer. The command history buffer holds 400 commands. Upon termination of the Logdump session, the session's history is appended to the file.

## Viewing Logdump Command Information and Syntax

To learn more about Logdump commands, see the alphabetical reference documentation in [Logdump Commands](#).

## Viewing the First Record

The steps in this section explain how to set up the Logdump environment and start viewing records.

## Running Logdump

Run the `logdump` program from the Oracle GoldenGate installation location. Logdump command lines are numbered so that you can use edit and history commands.

## Setting Up the View

The following commands set up a Logdump environment that shows the information most commonly used when analyzing Oracle GoldenGate trail records.

1. To view the record header with the data:

```
Logdump 1> GHDR ON
```

The record header contains information about the transaction.

2. To add column information:

```
Logdump 2> DETAIL ON
```

Column information includes the number and length in hex and ASCII.

- To add hex and ASCII data values to the column information:

```
Logdump 3> DETAILED DATA
```

- To view user tokens:

```
Logdump 4> USERTOKEN ON
```

User tokens are custom user-defined information that is specified in a TABLE or FILE mapping statement and stored in the trail file for specific purposes.

- To view automatically generated tokens:

```
Logdump 4> GGSTOKEN ON
```

Oracle GoldenGate automatically generated tokens include the transaction ID (XID), the row id for DML operations, the fetching status (if applicable), and tag value.

- To control how much record data is displayed:

```
Logdump 5> RECLEN length
```

## Opening a Trail File

To open a trail file, complete the following steps:

- Open a file with the following command:

```
Logdump 6> OPEN file_name
```

Where:

*file\_name* is either the relative name or fully qualified name of the file, including the file sequence number. For example:

```
open /home/ggs/dirdat/jd000000
open $data01.gloggl.aa000000
```

- To go to the first record and then move through records in sequence:

```
Logdump 7> NEXT
```

Alternatively, you can simply enter N.

**Figure 1-1 Logdump Record as Seen on a Windows System**

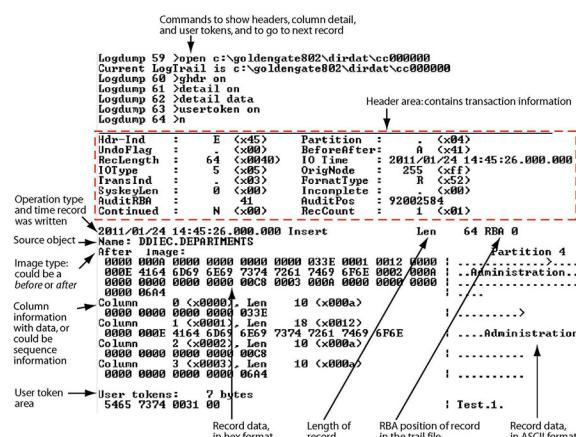


Figure 1-2 Trail Record as Seen on NonStop

Commands to show headers, column detail, and user tokens, and to go to next record

```

Logdump 2051 >show on
Logdump 2052 >detail on
Logdump 2053 >detail data
Logdump 2054 >usertoken on
Logdump 2055 >n

```

Header area: contains transaction information

Hdr-Ind : E <x45>	Partition : <x00>
UndoFlag : 0 <x00>	BeforeAfter: A <x41>
RecLength : 69 <x45>	IT-Time : 2011/01/21 20:03:45.291.598
TransInd : 15 <x0f>	Trans-ID : 108 <x68>
TransInd : 15 <x0f>	FormatType : F <x44>
SyskeyLen : 0 <x00>	Incomplete : <x00>
AuditRBA : 885467788	AuditPos : 885467788
Operation type and time record was written	RecCount : 0 <x00>

Source table -> 2011/01/21 20:03:45.291.598 FieldComp Len 69 RBA 12262

Name: \TRDAT\#DATAS5.TTSQUL.CUSTORD

Image type: After Image: Partition 0

could be a Before Image: 0000 0004 4249 4C4C 0001 0013 3139 3936 2B30 312D 1 .BILL.....1996-01-01:00:00:00:00:00

before or after 0020 2000 0300 0200 0000 0000 0001 4B20 0400 0400 .N.....M .02500000

0030 3235 3030 3030 30 0 (x0000), Len 4 (x0004)

Record data, in hex format

Column 1 <x0001>, Len 13 (x0013) | BILL

Column 2 <x0002>, Len 8 (x0008) | TRUCK

Column 3 <x0003>, Len 8 (x0008) | ..M

Column 4 <x0004>, Len 10 (x00a)

Column 5 <x0005>, Len 30 (x001e)

User token area

User token: 317 bytes

454E 464F 5354 005E 5452 494C 4D00 454E 4752 4F56 1 ENHDS\ \TRDAT.EDN50U

5000 4551 4154 4B4E 0045 4E4F 5235 5345 5200 5141 1 P,EDR,KN,EDNSUSER,OR

2E4D 4752 0048 4442 4100 4146 5445 5200 4844 5453 1 ,MGR,HDRA,AFTER,HTS

0032 3030 362D 3032 2102 3120 3132 3433 3838 3321 1 ,2006-02-21 12:38:31

2E36 3330 3435 3000 4844 5045 5300 3132 3035 3039 1 ,632480,HDRA,120908

3132 3030 362D 3032 2102 3120 3132 3433 3838 3321 1 ,2006-02-21 12:38:31

3000 4844 4F42 4600 B534 5249 4C4C 2E24 5141 5352 1 0,HDRAJ\ \TRDAT.40401

2E51 4153 5243 2E47 4754 4B4E 0048 4454 4142 005C 1 ,0,958P,GGTKN,HDRA\ \

5452 494C 4C2E 2451 4130 3126 5141 5352 432E 4747 1 \TRDAT.40401,0,958C,GG

544B 4E00 4844 4F42 4600 0048 4E53 4E52 5400 4844 4C45 1 TKN,HDRA,INSERT,HDRA

4E00 3235 3800 4E44 5458 0057 4B4F 4C45 00 1 N,258,HDRA,WHOLE,

Length RBA position of Record data, record in the trail file

# Logdump Commands

Here you see an alphabetical reference for syntax and usage of the Logdump utility commands.

For Logdump usage instructions, see [Using the Logdump Utility](#).

## Logdump Command Summary

The following are category summaries of the Logdump commands.

**Table 2-1 Working with Files**

Commands	Description
<a href="#">CD</a>	Sets the default directory, volume or subvolume.
<a href="#">DATAFILE</a>	Opens an Enscribe file from within Logdump.
<a href="#">GGSAUDITREAD</a>	Reads the TMF audit trail.
<a href="#">LOG</a>	Writes a session log.
<a href="#">NEXTTRAIL</a>	Closes the current file and opens the next file in the trail sequence.
<a href="#">OPEN</a>	Opens a trail file or extract file.
<a href="#">POSITION</a>	Sets the read position in the file.
<a href="#">SAVE</a>	Writes record data to another file.
<a href="#">WRITELOG</a>	Writes text to a session log.
<a href="#">VOLUME</a>	Sets the default directory, volume or subvolume.

**Table 2-2 Viewing Information**

Command	Description
<a href="#">BULKIOSTATS</a>	Displays bulk I/O statistics.
<a href="#">COUNT</a>	Displays record count information.
<a href="#">FILES</a>	Displays file names in the current directory or subvolume.
<a href="#">ENV</a>	Displays current Logdump settings.
<a href="#">FILEHEADER</a>	Displays file header information.
<a href="#">HASHCLEAR</a>	Clears the memory allocated to hash statistics generated when HASHSTATS is enabled.
<a href="#">HASHSTATS</a>	Enables or disables the display of statistics about file name when a COUNT DETAIL command is issued.
<a href="#">NOTIFY</a>	Displays the number of records scanned, the trail position, and the record timestamp at specified intervals when using COUNT and records are being suppressed from display through filtering options.

**Table 2-2 (Cont.) Viewing Information**

Command	Description
<a href="#">SHOW</a>	Displays internal information such as the current Logdump environment, a list of Oracle GoldenGate record types, and current filter settings.
<a href="#">TIME</a>	Displays the current time in local and GMT formats.

**Table 2-3 Selecting Data and Records**

Command	Description
<a href="#">BEGIN</a>	Searches through a TMF or Oracle GoldenGate trail to locate a record at or near the specified time.
<a href="#">ARGETNONDATACHANGES   ARSTOPNONDATACHANGES</a>	Includes or excludes records that did not result in a change to the database.
<a href="#">DUMP</a>	Displays the specified number of bytes of data from the current position in the file.
<a href="#">FILTER</a>	Filters the display of records.
<a href="#">NEXT</a>	Displays the next record(s) in the file.
<a href="#">SCANFORENDTRANS</a>	Finds a record that is the last record of, or the only record in, a transaction, and then displays the first record of the next transaction.
<a href="#">SCANFORHEADER</a>	Finds the start of the next record header.
<a href="#">SCANFORMETADATA</a>	Finds a specific metadata record.
<a href="#">SCANFORRBA</a>	Finds a specific relative byte address.
<a href="#">SCANFORTIME</a>	Finds the next record with a specific timestamp.
<a href="#">SCANFORTYPE</a>	Finds the next record of a specific type.
<a href="#">SKIP</a>	Skips a specified number of records.
<a href="#">TMFBEFOREIMAGE</a>	Sets the TMFARLIB to fetch the before image of a record and display it with the after image.

**Table 2-4 Caking Conversions**

Command	Description
<a href="#">CALCTLFKEY</a>	Calculates a unique key for TLF/PTLF records in ACI's BASE24 application.
<a href="#">COMPUTETIMESTAMP</a>	Converts a datetime string to a Julian timestamp.
<a href="#">CTIME</a>	Converts a C timestamp to an ASCII timestamp.
<a href="#">DECRYPT</a>	Decrypts data before displaying it in Logdump.
<a href="#">ENCRYPT</a>	Encrypts file data.
<a href="#">ESBLOCK</a>	Displays NonStop entry-sequenced syskeys as a block number and record number.
<a href="#">FLOAT</a>	Displays a number or hex string as a hex representation and a floating point number.
<a href="#">INTERPRETINTERVAL</a>	Displays a 64-bit Julian interval as <i>dd-hh:mm:ss:ms:us</i> .

**Table 2-4 (Cont.) Caking Conversions**

Command	Description
<a href="#">INTERPRETTIMESTAMP</a>	Displays a 64-bit Julian timestamp in ASCII format.

**Table 2-5 Controlling the Logdump Environment**

Command	Description
<a href="#">ASCIIDATA   EBCDICDATA</a>	Controls whether data is displayed in ASCII or EBCDIC format on an IBM mainframe.
<a href="#">ASCIIDUMP   EBCDICDUMP</a>	Sets the character set on an IBM mainframe.
<a href="#">ASCIIHEADER   EBCDICHEADER</a>	Controls whether the table name is displayed in ASCII or EBCDIC format on an IBM mainframe.
<a href="#">DETAIL</a>	Controls the display of detailed record information.
<a href="#">GGSTOKEN</a>	Controls the display of Oracle GoldenGate token data.
<a href="#">GGSTOKEN</a>	Controls the display of automatically generated token data.
<a href="#">GHDR</a>	Controls the display of header information.
<a href="#">HEADERTOKEN</a>	Controls the display of header token indicators.
<a href="#">Metadata ddlformat</a>	Displays the TDR columns in Nonstop DDL format.
<a href="#">Metadata defgenformat</a>	Displays the columns in a TDR in the format of a GG def from a definition file.
<a href="#">Metadata detail</a>	Displays tokens and values that make up a metadata record.
<a href="#">Metadata sqlformat</a>	Displays the columns in a TDR in the format of a SQL table create.
<a href="#">RECLEN</a>	Sets the maximum data output length.
<a href="#">SCANSCROLLING</a>	Controls whether a count notification displays on one line or multiple lines.
<a href="#">TIMEOFFSET</a>	Sets the time offset from GMT.
<a href="#">TMFBEFOREIMAGE</a>	Controls whether or not the before image is displayed for update operations from TMF audit.
<a href="#">TMFGETRECADDR   NOTMFGETRECADDR</a>	Controls Logdump's ability to call the ARGETRECADDR( ) function of TMFARLIB.
<a href="#">TMFIGNORERECCOUNT</a>	Sets the number of records that the TMFARLIB can ignore before returning a CURRENTPOSITION record.
<a href="#">TRAILFORMAT</a>	Sets the trail format to the old version (pre-Oracle GoldenGate 6.0) or the new version.
<a href="#">TRANSBYTELIMIT</a>	Sets a byte-count threshold for what is defined as a normal-sized transaction.
<a href="#">TRANSHIST</a>	Sets the size of the transaction history table that is used for tracking transaction size.
<a href="#">TRANSRECLIMIT</a>	Sets a record-count threshold for what is defined as a normal-sized transaction.
<a href="#">USERTOKEN</a>	Controls the display of user token data.

**Table 2-6 Miscellaneous Commands**

Command	Description
<a href="#">DEBUG</a>	Turns on Logdump debugging.
<a href="#">EXIT</a>	Exits Logdump.
<a href="#">FC</a>	Edits a previous command.
<a href="#">HELP</a>	Shows syntax for Logdump commands.
<a href="#">HISTORY</a>	Lists previously issued commands.
<a href="#">OBEY</a>	Executes a series of commands stored in a file.
<a href="#">X</a>	Executes a program from within Logdump.

## ARGETNONDATACHANGES | ARSTOPNONDATACHANGES

Use **ARGETNONDATACHANGES** and **ARSTOPNONDATACHANGES** when reading TMF trails to direct TMFARLIB to include or exclude records that did not result in a change to the database.

### Default

ARGETNONDATACHANGES

### Syntax

**ARGETNONDATACHANGES | ARSTOPNONDATACHANGES**

#### **ARGETNONDATACHANGES**

Includes non-change records.

#### **ARSTOPNONDATACHANGES**

Suppresses non-change records.

## ASCIIDATA | EBCDICDATA

Use **ASCIIDATA** or **EBCDICDATA** to control whether record data is displayed in ASCII or EBCDIC format on an IBM mainframe. You may need to use the **ASCIIDUMP** command to set the character set first.

### Default

ASCIIDATA ON (same as EBCDICDATA OFF)

### Syntax

**ASCIIDATA {ON | OFF} | EBCDICDATA {ON | OFF}**

## ASCIIDUMP | EBCDICDUMP

Use **ASCIIDUMP** or **EBCDICDUMP** to set the character set for the output of the **DUMP** command on an IBM mainframe. The hex part of the dump display is not affected by this command.

**Default**

```
ASCIIDUMP ON (same as EBCDICDUMP OFF)
```

**Syntax**

```
ASCIIDUMP {ON | OFF} | EBCDICDUMP {ON | OFF}
```

## ASCIIHEADER | EBCDICHEADER

Use ASCIIHEADER or EBCDICHEADER to control whether or not the table name in the record header is in ASCII or EBCDIC format on an IBM mainframe. You may need to use the ASCIIDUMP command to set the character set first.

**Default**

None.

**Syntax**

```
ASCIIHEADER {ON | OFF} | EBCDICHEADER {ON | OFF}
```

## BEGIN

Use BEGIN to do a binary search through a TMF or Oracle GoldenGate trail to locate a record at or near the specified time.

**Default**

None

**Syntax**

```
BEGIN timestamp
```

***timestamp***

The timestamp for which to search.

## BULKIOSTATS

Use BULKIOSTATS to display statistics for bulk I/O records, including the number of physical and logical reads and current and average read times.

**Default**

None

**Syntax**

```
BULKIOSTATS
```

## CALCTLKEY

Use `CALCTLKEY` to work around the `@GETENV ("TLFKEY", SYSKEY "unique_key")` function when it generates duplicate keys. The `TLFKEY` option associates a unique key with `TLF/PTLF` records in ACI's `BASE24` application. `CALCTLKEY` performs the calculation and displays the value for each record.

Without an argument, `CALCTLKEY` displays whether this feature is enabled or disabled.

### Default

OFF

### Syntax

```
CALCTLKEY {ON | OFF}
```

## CD

Use `CD` to set the default directory, volume, or subvolume. An alias for this command is `VOLUME`.

### Default

None

### Syntax

```
CD {directory | volume | subvolume}
```

## COLUMNDATA

Use `COLUMNDATA` to enable (ON) or disable (OFF) the display of Hex and ASCII record buffer of DML records. The default option is ON.

If you set the option to OFF, then the following records are not displayed:

- Hex and ASCII record buffer values of DML records
- Column data and null indicators for all tables, including LOB data, XML data, or any XML data.

Only the column name, column index, and column length values are displayed if `COLUMNDATA OFF` is set.

### Note

`COLUMNDATA OFF` overrides any other parameter like `DETAIL DATA` and `DETAIL ON` (even if they are issued afterward). When `COLUMNDATA OFF` is set, the only way for the Logdump utility to display column data is to set `COLUMNDATA ON`.

### Default

`COLUMNDATA ON`

## Syntax

```
COLUMNDATA ON | OFF
```

## Examples

### Example 1

When you set COLUMNDATA OFF, as shown in the following example:

```
Logdump 12 >detail data
Logdump 13 >columndata off
Logdump 14 >next
```

Logdump displays an output similar to the following:

```
2020-08-07 08:56:38.847.318 Insert Len 60 RBA 1939
Name: 1 sales.location
After Image : Partition 12 G s
Column 0 (x0000), Len 11 (x000b) city
Column 1 (x0001), Len 8 (x0008) cust_code
Column 2 (x0002), Len 19 (x0013) name
Column 3 (x0003), Len 6 (x0006) state
```

# COMPUTETIMESTAMP

Use COMPUTETIMESTAMP to convert a datetime string to Julian format.

## Default

None

## Syntax

```
COMPUTETIMESTAMP string
```

### *string*

A datetime string in the format of:

```
[[yy]yy-mm-dd] [hh[:mm][:ss]]
```

## Example

```
COMPUTETIMESTAMP 2005-01-01 12:00:00
```

This example returns the following:

```
2005-01-01 12:00:00 is JulianTimestamp 211971340800000000
```

# COUNT

Use COUNT to produce a record count summary and other information related to the amount of data in the file. The basic output, without options, shows the following:

- The RBA where the count began

- The total data bytes and average bytes per record
- Information about the operation types
- Information about the transactions

When the **DETAIL** command is issued prior to issuing **COUNT**, the information includes a count for each table or data file. **COUNT** options allow you to show table detail without using the **DETAIL** command first, set a start and end time for the count, filter the count for a table, data file, trail file, or extract file, and specify a time interval for counts. You can use the **DETAIL OFF** command to turn off the collection of this detailed information.

For arguments that take a time string, use the following format:

`[[yy]yy-mm-dd] [hh[:mm][:ss]]`

### Default

Produce a count summary of all records.

### Syntax

```
COUNT
[, DETAIL]
[, END[TIME] time_string]
[, INTERVAL minutes]
[, LOG wildcard]
[, START[TIME] time_string]
```

#### DETAIL

Adds a count for each table or data file that was processed by Extract to the summary count. The information includes the total and average number of data bytes and information about the operations that were performed. This data can also be obtained by using the **DETAIL** command before issuing **COUNT**.

#### END[TIME] *time\_string*

Stops the count with the last record written at the specified time.

#### INT[ERVAL] *minutes*

Displays statistics for total bytes, average bytes, and number of each type of operation that occurred within a specified interval of time, in minutes. Then it displays the totals for those statistics.

#### LOG *wildcard*

Produces a count for multiple trail or extract files specified with a wildcard.

#### START[TIME] *time\_string*

Begins the count with the first record written at the specified time.

### Examples

#### Example 1

```
COUNT START 2011-01-11 12:00:00 , END 2011-01-12 12:00:00
```

#### Example 2

```
COUNT INTERVAL 4
```

This displays something similar to the following. Individual table or data file count has been truncated due to space constraints.

## On Windows or UNIX (file names will differ):

```

Interval from 2011/02/28 11:30:00.000 to 2011/02/28 11:34:00.000,
  Recs          3
  Total Data Bytes      120
    Avg Bytes/Record    40
  Delete          3
  Before Images    3
LogTrail /home/ggs/dirdat/rt000000 has 304 records
  Total Data Bytes    12120
  Avg Bytes/Record    39
  Delete          3
  Insert           300
  FieldComp        1
  Before Images    3
  After Images     301

  Average of 303 Transactions
    Bytes/Trans ..... 88
    Records/Trans ... 1
    Files/Trans ..... 1

HR.JOBS                               Partition 4
  Total Data Bytes      5911
    Avg Bytes/Record    68
  Insert           86
  After Images     86

HR.REGIONS                            Partition 4
  Total Data Bytes      512
    Avg Bytes/Record    32
  Insert           16
  After Images     16

```

## On NonStop:

```

LogTrail \GGQA.$QA01.QADAT.LS000000 has 29656 records
  Total Data Bytes    3561022
    Avg Bytes/Record   120
  Delete          50
  Insert           21221
  Update           8379
  GSSPurgedata     6
  Before Images    50
  After Images     29606

  Average of 3621 Transactions
    Bytes/Trans ..... 1376
    Records/Trans ... 8
    Files/Trans ..... 1

\GGQA.$QA01.QAESRC.ACCTS               Partition 0
  Total Data Bytes    286414
    Avg Bytes/Record   142
  Delete          17
  Insert           2000
  Before Images    17
  After Images     2000

\GGQA.$QA01.QAESRC.ACCTN               Partition 0
  Total Data Bytes    281700
    Avg Bytes/Record   100

```

Delete	17
Insert	2000
Update	800
Before Images	17
After Images	2800

### Example 3

```
COUNT LOG ls*
```

This produces a count for all files whose names begin with LS. (Individual table or data file count has been truncated due to space constraints.)

On NonStop:

```
Current LogTrail is \GGQA.$QA01.QADAT.LS000000
Bad record found at RBA 5287, format 5.50)
2A56 623F | *Vb?
LogTrail \GGQA.$QA01.QADAT.LS000000 has 33 records
LogTrail \GGQA.$QA01.QADAT.LS000000 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000001
LogTrail \GGQA.$QA01.QADAT.LS000001 has 99 records
LogTrail \GGQA.$QA01.QADAT.LS000001 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000002
LogTrail \GGQA.$QA01.QADAT.LS000002 has 0 records
LogTrail \GGQA.$QA01.QADAT.LS000002 closed
Current LogTrail is \GGQA.$QA01.QADAT.LS000003
LogTrail \GGQA.$QA01.QADAT.LS000003 has 0 records
LogTrail \GGQA.$QA01.QADAT.LS000003 closed
LogTrail \GGQA.$QA01.QADAT.LS* has 132 records
```

Total Data Bytes	9468
Avg Bytes/Record	71
Insert	132
After Images	132

Average of 4 Transactions	
Bytes/Trans .....	3951
Records/Trans ...	33
Files/Trans .....	3

QAHRTS.JOB\$	Partition 4
Total Data Bytes	5220
Avg Bytes/Record	68
Insert	76
After Images	

76

On Windows or UNIX (file names will differ):

```
Current LogTrail is c:\goldengate802\dirdat\ls000000
Bad record found at RBA 5287, format 5.50)
2A56 623F | *Vb?
LogTrail c:\goldengate802\dirdat\ls000000 has 33 records
LogTrail c:\goldengate802\dirdat\ls000000 closed
Current LogTrail is c:\goldengate802\dirdat\ls000001
LogTrail c:\goldengate802\dirdat\ls000001 has 99 records
LogTrail c:\goldengate802\dirdat\ls000001 closed
Current LogTrail is c:\goldengate802\dirdat\ls000002
LogTrail c:\goldengate802\dirdat\ls000002 has 0 records
LogTrail c:\goldengate802\dirdat\ls000002 closed
Current LogTrail is c:\goldengate802\dirdat\ls000003
```

```
LogTrail c:\goldengate802\dirdat\ls000003 has 0 records
LogTrail c:\goldengate802\dirdat\ls000003 closed
LogTrail c:\goldengate802\dirdat\ls* has 132 records
```

Total Data Bytes	9468
Avg Bytes/Record	71
Insert	132
After Images	132

Average of 4 Transactions	
Bytes/Trans .....	3951
Records/Trans ...	33
Files/Trans .....	3

HR.JOB\$	Partition 4
Total Data Bytes	5220
Avg Bytes/Record	68
Insert	76
After Images	76

#### Example 4

COUNT DETAIL

This produces something similar to the following:  
On Windows or UNIX (file names will differ):

```
LogTrail /home/ggs/dirdat/rt000000 has 304 records
Total Data Bytes          12120
    Avg Bytes/Record      39
    Delete                 3
    Insert                 300
    FieldComp              1
    Before Images          3
    After Images           301
```

Average of 303 Transactions	
Bytes/Trans .....	88
Records/Trans ...	1
Files/Trans .....	1

GGS.TCUSTMER	Partition 4
Total Data Bytes	12120
Avg Bytes/Record	39
Delete	3
Insert	300
FieldComp	1
Before Images	3
After Images	301

Files	1, Coll	0, Chain	0
-------	---------	----------	---

On NonStop:

```
LogTrail \GGQA.$QA01.QADAT.LS000000 has 29656 records
Total Data Bytes          3561022
    Avg Bytes/Record      120
    Delete                 50
    Insert                 21221
    Update                 8379
    GSSPurgedata          6
```

Before Images	50
After Images	29606
Average of 3621 Transactions	
Bytes/Trans .....	1376
Records/Trans ...	8
Files/Trans .....	1
\GGQA.\$QA01.QAESRC.ACCTS	Partition 0
Total Data Bytes	286414
Avg Bytes/Record	142
Delete	17
Insert	2000
Before Images	17
After Images	2000

## CTIME

Use `CTIME` to convert a C timestamp to an ASCII timestamp.

### Default

None

### Syntax

`CTIME C_timestamp_string`

### Example

`CTIME 1109823330`

This returns the following:

```
timestamp = 1109823330 (0x42268f62)
localtime = Wed Mar  2 20:15:30 2005
gmtime    = Thu Mar  3 04:15:30 2005
```

## DATAFILE

Use `DATAFILE` to open an Enscribe data file from within Logdump

### ⓘ Note

You can use the `WRITEREC` command to write a Oracle GoldenGate record to the Enscribe file.

### Default

None

### Syntax

`DATAFILE file`

### Example

```
DATAFILE \SYSA.$DATA04.SALES.CUSTMER
```

## DEBUG

Use `DEBUG` to run debugging for Logdump. Use this command with the guidance of a Oracle GoldenGate support analyst.

### Default

Disabled

### Syntax

```
DEBUG
```

## DECRYPT

Use `DECRYPT` to decrypt data that was encrypted with Oracle GoldenGate trail encryption, so that it can be viewed with Logdump.

### Default

`OFF`

### Syntax

```
DECRYPT {OFF | ON [KEYNAME key_name]}
```

#### `OFF`

No decryption. This is the default.

#### `ON [KEYNAME key_name]`

- `ON` without the `KEYNAME` clause decrypts data that was encrypted with the `ENCRYPTTRAIL` parameter without options (256-key byte substitution).
- `ON` with the `KEYNAME` clause decrypts data that was encrypted with `ENCRYPTTRAIL` using an AES algorithm and a `KEYNAME` clause. For `key_name`, supply the logical name of the encryption key that was used in the `KEYNAME keyname` clause of `ENCRYPTTRAIL`.  
For more information about `ENCRYPTTRAIL`, see `ENCRYPTTRAIL`.
- `ON` also works to decrypt records that were encrypted using the Oracle wallet and master key methods; similar to how the `DECRYPTTRAIL` parameter for Replicat or Pump behaves.

### Example

```
DECRYPT ON
```

### Example

```
DECRYPT ON KEYNAME mykey
```

## DETAIL

Use `DETAIL` to include additional information in the Logdump output. By default, Logdump only shows the hex and ASCII representation of the record.

Without options, `DETAIL` displays the status of record detail (ON or OFF). Options do the following:

- `DETAIL ON` displays a list of columns that includes the column ID, length, and value in hex and ASCII.
- `DATA` adds hex and ASCII data values to the column list.
- `DETAIL OFF` turns off detailed display; `OFF` is the default.

`DETAIL` can be shortened to `DET`.

### Default

Display a column list

### Syntax

`DETAIL {ON | OFF | DATA}`

#### ON

Shows detailed column information.

#### OFF

Suppresses detailed column information.

#### DATA

Adds the hex and ASCII data values to the column information.

## DUMP

Use `DUMP` to display a HEX/ASCII or HEX/EBCDIC dump of the specified number of bytes from the open trail or extract file, starting at the current RBA.

`DUMP` does not work when reading TMF audit trails, because I/O to the TMF trails is done by `TMFARLIB`.

### Default

256

### Syntax

`DUMP bytes`

#### *bytes*

The number of bytes forward to display. Valid values are from 1 through 28672.

### Example

`DUMP 300`

This produces something similar to the following example. Note: This example shows only a few lines of the record.

```

Dump 300 Bytes at RBA 0
4700 0047 4800 003B 4500 0041 0000 646D 02F1 3387 | G..GH..;E..A..dm..3.
841D FE98 0000 0000 0000 5EA8 DC3C 0352 0000 | .....^..<.R..
0000 5C54 5249 4C4C 2E24 5141 3031 2E51 4153 5243 | ..\TRILL.$QA01.QASRC
2E41 4343 544E 005A 0000 4747 0000 4748 0000 3B45 | .ACCTN.Z..GG..GH..;E

```

## ENCRYPT

Use `ENCRYPT` to encrypt text supplied as an argument. The encryption method is 256-key byte substitution. The results are printed to screen.

### Default

None

### Syntax

```
ENCRYPT text
```

### Example

```
ENCRYPT 123456789
```

This produces the following:

```

Before
3132 3334 3536 3738 39 | 123456789
After
EF2E C1DC E4A7 68B4 14 | .....h..

```

## ENV

Use `ENV` to show current Logdump settings.

### Default

None

### Syntax

```
ENV
```

### Example

The following shows typical `ENV` settings on Windows and on NonStop.

Windows (UNIX is similar except for file names):

```

Current Volume      : C:\GoldenGate 002
LogTrail           : C:\goldengate002\dirdat\jd000001
Trail Format       : New
End of File        : 15861
Current Position   : 0
Next Position      : 0
Last Modtime       : 2013/01/01 13:45:51.000.000
Display RecLen     : 140
Logtrail Filter   : On
Show Ghdr          : On
Detail             : On
Trans History      : 0 Transactions, Records 100, Bytes 100000

```

```

LargeBlock I/O          : On, Blocksize 57344
Local System            : Little Endian
Logtrail Data          : Big Endian/ASCII
Logtrail Headers        : ASCII
Dump                   : ASCII
Timeoffset              : LOCAL
Scan Notify Interval   : 10000 records, Scrolling On

```

#### NonStop:

```

Current Volume          : $QU01.QAGGS
LogTrail                : \TRGGS.$QA01.QADAT.LS000000
Trail Format             : New
End of File              : 5831722
Current Position         : 0
Next Position            : 0
Last Modtime             : 2013/01/01 12:47:11.686.219
Display RecLen           : 140
Logtrail Filter          : On
Detail                  : On
Trans History            : 0 Transactions, Records 100, Bytes 100000
LargeBlock I/O            : On, Blocksize 57344
Local System              : Big Endian
Logtrail Data            : Big Endian/ASCII
Logtrail Headers          : ASCII
Dump                     : ASCII
Timeoffset                : LOCAL
Scan Notify Interval     : 10000 records, Scrolling On

```

## ESBLOCK

Use `ESBLOCK` for debugging on a NonStop system. It displays an entry-sequenced syskey as a block number and record number.

#### Default

None

#### Syntax

```
ESBLOCK entry_sequenced_RBA
```

#### Example

```
ESBLOCK 4294967302
```

This produces the following. It shows that the syskey value 4294967302 evaluates to block 1, record 6.

Interpreted	4294967302	0x0000000100000060	1.6
64-bit Syskey	4294967302	0x0000000100000060	
ES64_TO_RBA64	4102	0x00000000000010060	
RBA64_TO_ES64	4294967302	0x0000000100000060	

## EXIT

Use `EXIT` to exit Logdump and terminate the process. An alias for `EXIT` is `QUIT`.

**Default**

None

**Syntax**

EXIT

# FC

Use `FC` to edit a previously issued Logdump command and then execute it again. Previous commands are stored in the memory buffer and can be displayed by issuing the `HISTORY` command (see "[HISTORY](#)"). Issuing `FC` without arguments executes the most recently used command. By using options, you can retrieve a specific command by specifying its line number or a text substring.

**Using the Editor**

The `FC` command displays the command and then opens an editor with a prompt containing a blank line starting with two dots. To edit a command, use the space bar to position the cursor beneath the character where you want the change to begin, and then enter one of the following arguments. Arguments are not case-sensitive and can be combined.

**Table 2-7 FC Command Options**

Argument	Description
<code>i text</code>	Inserts text. For example:  <code>Logdump 24&gt; fc 9</code> <code>&gt; count</code> <code>.. i detail</code> <code>count detail</code>
<code>r text</code>	Replaces text. For example:  <code>Logdump 25&gt; fc 10</code> <code>&gt; timeoffset local</code> <code>.. rgmt</code> <code>timeoffset gmt</code>
<code>d</code>	Deletes a character. To delete multiple characters, enter a <code>d</code> for each one. For example:  <code>Logdump 26&gt; fc 11</code> <code>&gt; scanforrrba</code> <code>.. dd</code> <code>scanforrba</code>
<code>replacement_text</code>	Replaces the displayed command with the text that you enter on a one-for-one basis. For example:  <code>Logdump 26&gt; fc 10</code> <code>&gt; scanforrba 107</code> <code>.. 127</code> <code>scanforrba 127</code>

To execute the command, press `Enter` twice, once to exit the editor and once to issue the command. To cancel an edit, type a forward slash (/) twice.

### Default

Execute the most recent command again

### Syntax

```
FC [n | -n | string]
```

**n**

Returns the specified command line. Each Logdump command line is sequenced, beginning with 1 at the start of the session.

**-n**

Returns the command that was issued *n* lines before the current line.

**string**

Returns the last command that starts with the specified text string.

### Examples

#### Example 1

```
FC 9
```

#### Example 2

```
FC -3
```

#### Example 3

```
FC sca
```

## FILEHEADER

Use `FILEHEADER` to display the contents of the header of the currently open trail file.

The file header is stored as a record at the beginning of a trail file preceding the data records. The information that is stored in the trail header provides enough information about the records to enable an Oracle GoldenGate process to determine whether the records are in a format that the current version of Oracle GoldenGate supports.

The trail header fields are stored as tokens, where the token format remains the same across all versions of Oracle GoldenGate. If a version of Oracle GoldenGate does not support any given token, that token is ignored. Deprecated tokens are assigned a default value to preserve compatibility with previous versions of Oracle GoldenGate.

The current `FILEHEADER` command applies globally to the Logdump session, until a different `FILEHEADER` command is issued.

### To View the File Header

To view the file header:

1. Position to the beginning of the trail file with the following Logdump command.

```
pos 0
```

- Issue the following Logdump command to see the first record of the file, the one that contains the file header.

next

### To Retrieve the File Header Tokens

To retrieve file header values as input parameters, use the `@GETENV` function with the `GGFILEHEADER` option. See `GETENV`.

 **Note**

The Logdump command `HEADERTOKEN` also shows trail tokens, but it shows a brief summary of each one. `FILEHEADER` shows actual token values.

**Table 2-8 Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
Signature	UINT32	Internal use.
Compatibility	UINT16	<p>The version of the trail. The compatibility level of the Oracle GoldenGate software must be greater than, or equal to, that of the trail file for a process to be able to read the trail file.</p> <p>Current valid values are 0 to 5.</p>
CharSet	INT32	<p>The global character set of the trail file, as defined in the parameter file or the default value. For example:</p> <p>WCP1252-1</p> <p>-3 indicates the system default.</p>
CreationTime	Timestamp	The time that the trail file was created, in local GMT Julian time, INT 64.
URI	String	<p>The universal resource identifier of the process that created the trail file, in the format of:</p> <p><i>host_name:dir[:dir][:dir_n]group_name</i></p> <p>Where:</p> <ul style="list-style-type: none"> <li><i>host_name</i> is the name of the server that hosts the process</li> <li><i>dir</i> is a subdirectory of the Oracle GoldenGate installation path.</li> <li><i>group_name</i> is the name of the process group that is linked with the process.</li> </ul> <p>Example:</p> <p>sys1:home:oracle:v9.5:extora</p> <p>Shows where the trail was processed and by which process. This includes a history of previous runs.</p>
URIHistory	String array	<p>List of the URIs of processes that wrote to the trail file before the current process.</p> <ul style="list-style-type: none"> <li>For a primary Extract, this field is empty.</li> <li>For a data pump, this field is <code>URIHistory + URI</code> of the input trail file.</li> </ul>
FileName	String	Name of the trail file. Can be absolute or relative path, with forward or backward slash depending on the file system.

**Table 2-8 (Cont.) Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
MultiPart	Boolean	True/False flag indicating whether the trail file is a single file (such as one created for a batch run) or a sequentially numbered file that is part of a trail for online, continuous processing. If False, the SeqNum subtoken is not valid.
SeqNum	UINT32	The sequence number of the file in the trail, if MultiPart is true. Invalid if multipart is false. The value is the numerical sequence number, without any zero padding.
FileSize	UINT64	Size of the trail file. Value is NULL until the trail file is completed. Non-NULL values are in bytes.
FirstRecordCSN	CSN	The commit sequence number (CSN) of the first record in the trail file. Value is NULL until the trail file is completed.
LastRecordCSN	CSN	The commit sequence number (CSN) of the last record in the trail file. Value is NULL until the trail file is completed.
FirstRecordIOTime	Timestamp	The time that the first record in the trail file was written. Value is NULL until the trail file is completed.
LastRecordIOTime	Timestamp	The time that the last record in the trail file was written. Value is NULL until the trail file is completed.
SysName	String	The name of the operating system, for example: SunOS Linux Microsoft Windows
NodeName	String	The name of the machine, for example sys1.
Release	String	The release level of the operating system, for example: 5.10 2.6.9-11.ELsmp
Version	String	The version of the operating system, for example: s10_69 #1 SMP Fri Feb 24 16:56:28 EST 2006
Hardware	String	The hardware type of the processor, for example: sun4u x86_64 x86
Vendor	UINT16	The name of the database vendor. Some (but not all) examples are: DB2 ZOS CTREE MSSQL MYSQL ORACLE TERADATA TIMESTEN NONSTOP ENSCRIBE
Name	String	The name of the database, for example findb.

**Table 2-8 (Cont.) Oracle GoldenGate File Header Tokens**

Token/subtoken	Data Type	Description
Instance	String	The name of the database instance, if applicable to the database type, for example ORA1022A.
Charset	INT32	The character set of the database. Currently, the valid value is -1 (unknown). (For some databases, this will be empty.)
MajorVersion	UINT16	The major version of the database.
MinorVersion	UINT16	The minor version of the database.
VerString	String	The maintenance (patch) level of the database.
ClientCharset	INT32	The character set of the database client. Currently, the valid value is -1 (unknown). (For some databases, this will be empty.)
ClientVerString	String	The maintenance (patch) level of the database client. (For some databases, this will be empty.)
Name	String	The group name that is associated with the process.
DataSource	UINT16	The data source that was read by the process. Can be one of: <ul style="list-style-type: none"> <li>DS_EXTRACT_TRAILS (source was an Oracle GoldenGate extract file, populated with change data)</li> <li>DS_LOG_TABLE (source was an Oracle GoldenGate log table, used for trigger-based extraction)</li> <li>DS_DATABASE (source was a direct select from database table written to a trail, used for SOURCEISTABLE-driven initial load)</li> <li>DS_TRAN_LOGS (source was the database transaction log)</li> <li>DS_INITIAL_DATA_LOAD (source was Extract; data taken directly from source tables)</li> <li>DS_VAM_EXTRACT (source was a vendor access module)</li> <li>DS_VAM_TWO_PHASE_COMMIT (source was a VAM trail)</li> </ul>
MajorVersion	UINT16	The major version of the process (xx).
MinorVersion	UINT16	The minor version of the process (xx.xx).
MaintenanceLevel	UINT16	The maintenance version of the process (xx.xx.xx).
PatchLevel	UINT16	The patch version of the process (xx.xx.xx.xx).
BuildNumber	UINT16	The build number of the process.
VerString	String	The version string of the process. For example: 11.1.1.17A not for production
LastCompletedCSN	CSN	Internal use
LastCompletedXids	Xid	Internal use
LastSCN	CSN	Internal use
LastXid	Xid	Internal use

**Default**

OFF

**Syntax**

FILEHEADER {ON | OFF | DETAIL}

**ON**

Enables the display of the file header, showing the main header tokens.

**OFF**

Disables the display of the file header.

**DETAIL**

Provides detailed information that includes the sub-tokens.

## Examples

### Example 1

```
FILEHEADER ON
TokenID x46 'F' Record Header      Info x00 Length 587
TokenID x30 '0' TrailInfo          Info x00 Length 303
TokenID x31 '1' MachineInfo        Info x00 Length 103
TokenID x32 '2' DatabaseInfo       Info x00 Length 88
TokenID x33 '3' ProducerInfo       Info x00 Length 85
TokenID x34 '4' ContinuityInfo     Info x00 Length 4
TokenID x5a 'Z' Record Trailer     Info x00 Length 587
2011/1/18 13:39:18.951.346 FileHeader          Len 587 RBA 0
Name: *FileHeader*
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0.../0...f..q1....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....
a33b 0000 450a 3634 3136 3138 3936 3932 0000 0000 | .;..E.6416189692....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 3aff 0045 0000 0000 0000 0000 | .....:..E.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 003d | .....=.
0000 0c02 f178 34eb 556a 403c ff00 0c00 0000 0000 | .....x4.Uj@<.....
0000 00 | ...
GroupID x30 '0' TrailInfo          Info x00 Length 303
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200 | 0.../0...f..q1....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400 | .....3.....x4...?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 | .7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 | ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e | Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3030 3700 0005 | /dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d | .8.....@9.....
a33b 0000 450a 3634 3136 3138 3936 3932 0000 0000 | .;..E.6416189692....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....:..E.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 | .....=.
0000 0c02 f178 34eb 556a 403c ff00 0c00 0000 0000 | .....x4.Uj@<.....
0000 00 | ...
GroupID x31 '1' MachineInfo        Info x00 Length 103
3100 0067 3000 000b 0005 4c69 6e75 7831 0000 0f00 | 1..g0.....Linux1....
0974 656c 6c75 7269 616e 3200 0014 000e 322e 362e | .tellurian2....2.6.
392d 3131 2e45 4c73 6d70 3300 0029 0023 2331 2053 | 9-11.ELsmp3...).##1 S
4d50 2046 7269 204d 6179 2032 3020 3138 3a32 353a | MP Fri May 2018:25:
3330 2045 4454 2032 3030 3534 0000 0c00 0678 3836 | 30 EDT 20054....x86
5f36 34 | _64
GroupID x32 '2' DatabaseInfo       Info x00 Length 88
3200 0058 3000 0006 0007 3100 000e 0008 4f52 4131 | 2..x0.....1.....ORA1
```

3032 3241 3200 000e 0008 6f72 6131 3032 3261 3300	022A2.....ora1022a3.
0008 ffff ffff 3400 0006 0000 3500 0006 0000 3600	.....4.....5.....6.
0006 0000 3700 0008 ffff ffff 3800 0010 000a 3130	.....7.....8.....10
2e32 2e30 2e32 2e30	.2.0.2.0
GroupID x33 '3' ProducerInfo Info x00 Length 85	
3300 0055 3000 000a 0004 4546 4152 3100 0006 0003	3..U0.....EFAR1.....
3200 0006 0000 3300 0006 0000 3400 0006 0000 3500	2.....3.....4.....5.
0006 0000 3600 0006 0017 3700 0023 001d 5665 7273	.....6.....7..#.Vers
696f 6e20 5374 2e20 416e 6472 6577 7320 4275 696c	ion St. Andrews Buil
6420 3032 33	d 023
GroupID x34 '4' ContinuityInfo Info x00 Length 4	
3400 0004	4...

## Example 2

### FILEHEADER DETAIL

TokenID x46 'F' Record Header	Info x00 Length 587
TokenID x30 '0' TrailInfo	Info x00 Length 303
TokenID x31 '1' MachineInfo	Info x00 Length 103
TokenID x32 '2' DatabaseInfo	Info x00 Length 88
TokenID x33 '3' ProducerInfo	Info x00 Length 85
TokenID x34 '4' ContinuityInfo	Info x00 Length 4
TokenID x5a 'Z' Record Trailer	Info x00 Length 587

2011/01/18 13:40:26.034.631 FileHeader	Len 587 RBA 0
Name: *FileHeader*	
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200	0.../0...f..q1.....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400	.....3.....x4....?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68	.7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773	ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e	Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3700 0005	/dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d	.8.....@9.....

GroupID x30 '0' TrailInfo Info x00 Length 303	
3000 012f 3000 0008 660d 0a71 3100 0006 0001 3200	0.../0...f..q1.....2.
0008 0000 0016 3300 000c 02f1 7834 eac7 7f3f 3400	.....3.....x4....?4.
0037 0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68	.7.luri:tellurian::h
6f6d 653a 6d63 6361 7267 6172 3a67 6773 3a67 6773	ome:mccargar:ggs:ggs
4f72 6163 6c65 3a73 6f75 7263 6536 0000 1700 112e	Oracle:source6.....
2f64 6972 6461 742f 6572 3030 3030 3700 0005	/dirdat/er0000007...
0138 0000 0800 01e2 4039 0000 0c00 0000 0000 001d	.8.....@9.....
a33b 0000 450a 3634 3136 3138 3936 3932 0000 0000	.:.E.6416189692....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....
0000 0000 0000 0000 0000 0000 0000 0000 0000 003d	.....
0000 0c02 f178 34eb 556a 403c ff00 0c00 0000 0000	.....x4.Uj@<.....
0000 00	...
TokenID x30 '0' Signature Info x00 Length 8	
660d 0a71	f..q
TokenID x31 '1' Compatibility Info x00 Length 6	
0001	..
TokenID x32 '2' Charset Info x00 Length 8	
0000 0016	....
TokenID x33 '3' CreationTime Info x00 Length 12	
02f1 7834 eac7 7f3f	..x4....?

TokenID x34 '4' URI	Info x00 Length	55
0031 7572 693a 7465 6c6c 7572 6961 6e3a 3a68 6f6d	.luri:tellurian::hom	
653a 6d63 6361 7267 6172 3a67 6773 3a67 6773 4f72	e:mccargar:ggs:ggsOr	
6163 6c65 3a73 6f75 7263 65	acle:source	
TokenID x36 '6' Filename	Info x00 Length	23
0011 2e2f 6469 7264 6174 2f65 7230 3030 3030 30	....../dirdat/er000000	
TokenID x37 '7' MultiPart	Info x00 Length	5
01	.	
TokenID x38 '8' Seqno	Info x00 Length	8
0001 e240	...@	
TokenID x39 '9' FileSize	Info x00 Length	12
0000 0000 0000 1da3	.....	
TokenID x3b ';' LastCSN	Info x00 Length	69
0a36 3431 3631 3839 3639 3200 0000 0000 0000 0000	.6416189692.....	
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....	
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....	
0000 0000 00	.....	
TokenID x3a '::' FirstCSN	Info xff Length	69
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....	
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....	
0000 0000 0000 0000 0000 0000 0000 0000 0000 0000	.....	
0000 0000 00	.....	
TokenID x3d '=' LastIOTime	Info x00 Length	12
02f1 7834 eb55 6a40	..x4.Uj@	
TokenID x3c '<' FirstIOTime	Info xff Length	12
0000 0000 0000 0000	.....	
GroupID x31 '1' MachineInfo	Info x00 Length	103
3100 0067 3000 000b 0005 4c69 6e75 7831 0000 0f00	1..g0.....Linux1....	
0974 656c 6c75 7269 616e 3200 0014 000e 322e 362e	.tellurian2.....2.6.	
392d 3131 2e45 4c73 6d70 3300 0029 0023 2331 2053	9-11.ELsmp3...).##1 S	
4d50 2046 7269 204d 6179 2032 3020 3138 3a32 353a	MP Fri May 20 18:25:	
3330 2045 4454 2032 3030 3534 0000 0c00 0678 3836	30 EDT 20054.....x86	
5f36 34	_64	
TokenID x30 '0' Sysname	Info x00 Length	11
0005 4c69 6e75 78	..Linux	
TokenID x31 '1' Nodename	Info x00 Length	15
0009 7465 6c6c 7572 6961 6e	..tellurian	
TokenID x32 '2' Release	Info x00 Length	20
000e 322e 362e 392d 3131 2e45 4c73 6d70	..2.6.9-11.ELsmp	
TokenID x33 '3' Version	Info x00 Length	41
0023 2331 2053 4d50 2046 7269 204d 6179 2032 3020	.##1 SMP Fri May 20	
3138 3a32 353a 3330 2045 4454 2032 3030 35	18:25:30 EDT 2005	
TokenID x34 '4' Hardware	Info x00 Length	12
0006 7838 365f 3634	..x86_64	
GroupID x32 '2' DatabaseInfo	Info x00 Length	88
3200 0058 3000 0006 0007 3100 000e 0008 4f52 4131	2..X0.....1.....ORA1	
3032 3241 3200 000e 0008 6f72 6131 3032 3261 3300	022A2.....ora1022a3.	
0008 ffff ffff 3400 0006 0000 3500 0006 0000 3600	.....4.....5.....6.	
0006 0000 3700 0008 ffff 3800 0010 000a 3130	.....7.....8.....10	
2e32 2e30 2e32 2e30	..2.0.2.0	
TokenID x30 '0' Vendor	Info x00 Length	6
0007	..	
TokenID x31 '1' Name	Info x00 Length	14
0008 4f52 4131 3032 3241	..ORA1022A	
TokenID x32 '2' Instance	Info x00 Length	14
0008 6f72 6131 3032 3261	..ora1022a	
TokenID x33 '3' Charset	Info x00 Length	8
ffff ffff	....	

```

TokenID x34 '4' MajorVersion      Info x00 Length   6
  0000
TokenID x35 '5' MinorVersion     Info x00 Length   6
  0000
TokenID x36 '6' VerString       Info x00 Length   6
  0000
TokenID x37 '7' ClientCharset    Info x00 Length   8
  ffff ffff
TokenID x38 '8' ClientVerString  Info x00 Length  16
  000a 3130 2e32 2e30 2e32 2e30
                                         | ..10.2.0.2.0
TokenID x3e '>' DbUniqueName
  Info x00 Length  17000f 756e 6971 7565 5f64 6174 6162
  6173 65      | ..unique_database

GroupID x33 '3' ProducerInfo     Info x00 Length  85
  3300 0055 3000 000a 0004 4546 4152 3100 0006 0003
  3200 0006 0000 3300 0006 0000 3400 0006 0000 3500
  0006 0000 3600 0006 0017 3700 0023 001d 5665 7273
  696f 6e20 5374 2e20 416e 6472 6577 7320 4275 696c
  6420 3032 33
                                         | ..U0.....EFAR1.....
                                         | 2.....3.....4.....5.
                                         | ....6.....7..#.Vers
                                         | ion St. Andrews Buil
                                         | d 023
TokenID x30 '0' Name             Info x00 Length   10
  0004 4546 4152
                                         | ..EFAR
TokenID x31 '1' DataSource        Info x00 Length   6
  0003
TokenID x32 '2' MajorVersion     Info x00 Length   6
  0000
TokenID x33 '3' MinorVersion     Info x00 Length   6
  0000
TokenID x34 '4' MaintLevel       Info x00 Length   6
  0000
TokenID x35 '5' BugFixLevel      Info x00 Length   6
  0000
TokenID x36 '6' BuildNumber      Info x00 Length   6
  0017
TokenID x37 '7' VerString        Info x00 Length  35
  001d 5665 7273 696f 6e20 5374 2e20 416e 6472 6577
  7320 4275 696c 6420 3032 33
                                         | ..Version St. Andrew
                                         | s Build 023

GroupID x34 '4' ContinuityInfo   Info x00 Length   4
  3400 0004
                                         | 4...

```

## FILES

Use **FILES** to display summary file information for files on the local system. The default command displays all files in the current directory or subvolume. To constrain the display to specific files, you can supply a wildcarded name.

This command can be shortened to **FI**. An alias for this command is **DIR** or **FILEINFO**.

### Default

Show all files in current directory or subvolume

### Syntax

**FILES** [*directory* | *subvolume* | *volume.subvolume*]

**directory** | **subvolume** | **volume.subvolume**

The name of a directory or subvolume or a wildcard for specific files.

If any file or directory in the specified path contains spaces, the entire path must be enclosed within double quotation marks.

### Example

```
FILES "c:\goldengate ver802\dirdat\cc*"
```

### Example

```
FILES $QAGG.QA01.*
```

## FILTER

Use FILTER to filter the display based on one or more criteria.

- You can string multiple FILTER commands together, separating each one with a semi-colon, as in:

```
FILTER INCLUDE FILENAME fin.act*; FILTER RECTYPE 5; FILTER MATCH ALL
```

Or...

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCTN; FILTER SYSKEY 4294967302; FILTER MATCH ALL
```

- To avoid unexpected results, avoid stringing filter options together with one FILTER command. For example, the following would be *incorrect*:

```
FILTER INCLUDE FILENAME fin.act*; RECTYPE 5; MATCH ALL
```

Or...

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCTN; SYSKEY 4294967302
```

Without arguments, FILTER displays the current filter status (ON or OFF) and any filter criteria that are in effect.

### Comparison Operators

For options that take comparison operators, the following standard operators may be used. The absence of an operator implies Equal.

**Table 2-9 Filter Option Comparison Operators**

Operator	Example
Equal	= EQ ==
Less than	< LT
Less than or equal	<=
Greater than	> GT

**Table 2-9 (Cont.) Filter Option Comparison Operators**

Operator	Example
Greater than or equal	>= GE
Not equal	<> NE !=

**Default**

Shows current filter settings

**Syntax**

`FILTER [INCLUDE] [EXCLUDE] filter_option`

Where:

*filter\_option* can be one of:

```
{
ANSINAME name [, name] |
AUDITRBA rba [comparison_operator] |
CLEAR {filter_spec | ALL} |
CSN | LogCSN [comparison_operator] [value] |
ENDTIME time_string |
FILENAME name [, name] |
GGSTOKEN token_name [comparison_operator] [token_value] |
HEX "hex_string" [byte_range] [, "hex_string" [byte_range]] [...] |
INT16 16_bit_integer |
INT32 32_bit_integer |
IOTYPE operation_type [, operation_type] |
MATCH {ANY | ALL} |
OFF |
ON |
PROCESS process_name |
RBA byte_address [comparison_operator] [...] |
RECLEN length [comparison_operator] |
RECTYPE {type_number | type_name} |
SHOW |
STARTTIME time_string |
STRING [BOTH] [B],text [ column_range ] |
[[B],text [column_range]] [...] |
SYSKEY system_key [comparison_operator] [...] |
TRANSID transaction_identifier |
TRANSIND indicator [comparison_operator] |
TYPE type |
UNDOFLAG type [comparison_operator] |
USERTOKEN token_name [comparison_operator] [token_value] }
```

**ANSINAME name [, name]**

Filters based on the ANSI name of a SQL/MX table or a table from a Windows or UNIX source system. For use on NonStop systems. The format for *name* is:

*catalog.schema.table*

Up to eight name specifications may be supplied. The command is case-sensitive.

To filter based on the name of a data file, use the **FILENAME** option.

**AUDITRBA rba [comparison\_operator]**

Filters based on the relative byte address of a commit record. For *comparison\_operator*, see "[Comparison Operators](#)".

**CLEAR {filter\_spec | ALL}**

Removes filtering criteria.

- **ALL** removes all filter criteria.
- *filter\_spec* removes only the specified criterion. Specify any FILTER option, but not the value. The following example is valid:

```
FILTER CLEAR STRING
```

The following example is not valid:

```
FILTER CLEAR STRING "Denver"
```

An alias for **CLEAR** is **RESET**.

**CSN | LogCSN [comparison\_operator] [value]**

Filters based on a commit sequence value.

For *comparison\_operator*, see "[Comparison Operators](#)".

**ENDTIME time\_string**

Ends the filter at the last record written at the specified time. For the time string, use the format of:

```
[[yy]yy-mm-dd] [hh[:mm][:ss]]
```

Example:

```
ENDTIME 2011-01-31 23:59:59
```

This command can be shortened to **ENDTS** or **END**.

**FILENAME name [, name]**

Filters based on the name of a SQL table, or a group of names, with the name format being:

```
[catalog.]owner.table  
[catalog.]owner.string*
```

Also filters on the name of a NonStop data file, or a group of names, with the name format being:

```
volume.subvolume.file  
volume.subvolume.string*
```

On Windows and UNIX, both types of objects are supported. On NonStop, only viewing NonStop files is supported. To view SQL tables on NonStop, use the **ANSINAME** option.

**FILENAME** is case-sensitive on Windows and UNIX systems. If the database requires quote marks around a name If opening a NonStop data file on Windows or UNIX, the file name is converted to upper case. **FILENAME** can be shortened to **FILE** or **FI**.

Up to eight name specifications may be supplied.

**GGSTOKEN *token\_name* [*comparison\_operator*] [*token\_value*]**

Filters based on a specific Oracle GoldenGate token in the record header.

- For *token\_name*, provide the name of the token, such as TRANSID.  
To view a list of possible tokens and values, see "[GGSTOKEN](#)".
- For *token\_value* provide the actual value for this token that is to be the filter string.

For *comparison\_operator*, see "[Comparison Operators](#)"

**HEX "hex\_string" [*byte\_range*] [, "hex\_string" [*byte\_range*]] [...]**

Filters based on a hex string and, optionally, a range of columns. To specify a range of columns, use the format of:

*start\_column:end\_column*

Example:

10:35

This option allows up to eight hex string and column arguments. Hex strings must be enclosed within quotes.

Hex filter strings must be in double quotes.

**INCLUDE**

Specifies that the filter will include the information specified with other options in the current FILTER statement. Can be shortened to INC.

**EXCLUDE**

Specifies that the filter will exclude the information specified with other options in the current FILTER statement. Can be shortened to EXC.

**INT16 16\_bit\_integer**

Filters based on a 16-bit integer. Use with 16-bit processors.

**INT32 32\_bit\_integer**

Filters based on a 32-bit integer. Use with 32-bit processors.

**IOTYPE *operation\_type* [, *operation\_type*]**

Filters based on the type of operation. A list of record types can be viewed with the SHOW RECTYPE command in Logdump. Up to 32 operation types can be specified with IOTYPE.

**MATCH {ANY | ALL}**

Controls filtering response when multiple filters have been specified. Can be shortened to MAT or MA.

- ANY includes a record for display or counts if the condition matches any of the filter conditions. This is the default.
- ALL includes a record for display or counts only if the condition matches all of the filter conditions.

**OFF**

Disables record filtering. By default, filtering is disabled. An alias for this option is DISABLE.

**ON**

Enables record filtering. An alias for this option is ENABLE.

**RBA *byte\_address* [*comparison\_operator*] [...]**

Filters based on a relative byte address. Accepts either a 32-bit or 64-bit value. Up to 32 specifications can be supplied.

**RECLEN *length* [*comparison\_operator*]**

Filters based on a record length, in bytes. For *comparison\_operator*, see "[Comparison Operators](#)".

**RECTYPE {*type\_number* | *type\_name*}**

Filters based on the type of record. Can be either of the following:

- The number assigned to the record type.

FILTER RECTYPE 10

- The name of the record type.

FILTER RECTYPE Update

To view the record type names and numbers, issue the SHOW RECTYPE command. (See "[SHOW](#)".)

**SHOW**

Displays filter settings. Same as using FILTER without any options.

**STARTTIME *time\_string***

Starts the filter with the first record written at the specified time. For the time string, use the format of:

[[yy]yy-mm-dd] [hh[:mm][:ss]]

Example:

STARTTIME 2011-01-01 00:00:00

Can be shortened to STARTTS or START.

**STRING [*BOTH*] [*B*], "*text*" [*column\_range*] [[*B*], *text* [*column\_range*]] [...]**

- *text* filters based on a string. Enclose the string within double quotes.
- *column\_range* filters based on a range of columns. Use the format of:

*start\_column:end\_column*

Example:

10:35

- *BOTH* filters on both a string and a column range.
- [*B*] specifies a case-insensitive match. You can match up to eight string and column arguments.

If the trail data is EBCDIC, issue the EBCDICDATA ON or ASCIIData OFF command before using FILTER STRING to ensure the correct matching.

STRING can be shortened to STR.

**SYSKEY *system\_key* [*comparison\_operator*] [...]**

Filters based on a NonStop source key. Accepts either a 32-bit or 64-bit value. Up to 32 specifications can be supplied.

**TRANSIND *indicator* [*comparison\_operator*]**

Filters based on the TransInd field of the record header. Valid values:

- 0 = start of transaction
- 1 = middle of transaction
- 2 = end of transaction
- 3 = only record in transaction

For example, to filter for the end of a transaction, use the following command, including the spaces in the syntax:

```
FILTER INCLUDE TransInd > = 2
```

For *comparison\_operator*, see "[Comparison Operators](#)"

**TRANSID '*transaction\_identifier*'**

Filters on the TMF transaction identifier when reading a TMF trail, for example:

```
FILTER INCLUDE TRANSID \GGQA(2).0.12792182.
```

**UNDOFLAG *type* [*comparison\_operator*]**

Filters based on the NonStop undo flag. The undo flag is set for records that are undone when a TMF transaction is aborted. Normally, UndoFlag is set to zero, but if the record is the backout of a previously successful operation, then UndoFlag will be set to 1. An undo that is performed by the disc process because of a constraint violation is not marked as an undo.

For *comparison\_operator*, see "[Comparison Operators](#)"

**USERTOKEN *token\_name* [*comparison\_operator*] [*token\_value*]**

Filters based on a specific user token in the trail file header.

- *token\_name* is the name of any token that is defined with the TOKENS clause of a TABLE statement of the Extract parameter file. It is not case-sensitive.
- *token\_value* is either a constant that is enclosed within double quotes or the result of an Oracle GoldenGate column-conversion function, depending on what was specified in the TOKENS clause for *token\_name*.
- For *comparison\_operator*, see "[Comparison Operators](#)"

The following shows filter options modified by comparison operators.

```
FILTER INCLUDE RECLEN > 400
FILTER INCLUDE RECLEN < 200
FILTER INCLUDE TRANSIND <> 1
FILTER INCLUDE SYSKEY > 202172700557313
```

The following filters for a data file name and for a relative key 19446, which has a hex value of 00004bf6. Because MATCH ALL is used, a record must meet all of the filter specifications to be included in the filter.

```
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCT*
FILTER INCLUDE HEX "00004bf6" 0:3
FILTER MATCH ALL
```

The following filters for tables that start with ACC except for the ACCDET table, and for records that contain a timestamp between the specified start and stop times. By default, if a record matches any of the INCLUDE specifications, it is included in the filter.

```
FILTER INCLUDE FILENAME SALES.ACC*
FILTER EXCLUDE FILENAME SALES.ACCTDET
FILTER INCLUDE STARTTIME 2011-01-11 17:00:00
FILTER INCLUDE ENDTIME 2011-01-11 19:00:00
```

The following shows filter options with multiple specifications. By default, a record that matches any of these specifications will be included in the filter. Note that in the STRING filter, two of the criteria are not case-sensitive, while one is, and the filter is confined to a column range.

```
FILTER INCLUDE IOTYPE insert,update,delete
FILTER INCLUDE STRING b"String1" "string2" b"String3" 25:50
FILTER INCLUDE FILENAME $QA01.QAESRC.ACCT1, $QA01.QAESRC.ACCT2, $QA01.QAESRC.ACCT3
```

## FLOAT

Use FLOAT to display a number or hex string in both its hex representation and as a floating-point number. This command is useful when looking for a specific floating-point number and you need the hex representation of that number. This command does not require a trail file to be opened.

The output of this command is *hex\_value float\_string*.

FLOAT assumes the floating point representation is the default for the current platform. It will not make a conversion between a Tandem floating point number (which is not IEEE-754) and a IEEE-754 floating point number, which is supported on UNIX and Windows systems.

### Default

None

### Syntax

FLOAT *input\_string* [*format*]

#### *input\_string*

Can be one of the following:

- A valid floating point number as a string in the format of the following: an optional sign character (+ or -), followed by a sequence of decimal digits, which can contain a decimal-point followed by an exponent (an e or E character, followed by an optional sign and a sequence of digits).
- A valid hexadecimal number as a string formed by the following: 0x, %H, %h, X, x, H or h, followed by a sequence of hexadecimal digits (1-9, a-f).

#### *format*

Can be one of the following:

- One of the following to specify the output format sizing: IEEE, TDM, TANDEM, NSK, 64bit, 64-bit, F64, 32bit, 32-bit or F32.
- A format specifier formed by the string FMT followed by any valid C99 Print Format specifier (for example, %lx, %e, %g).

### Example 1

The following examples are different results that can be obtained for the same values 2.1 and 2.2.

```
Logdump 58 >float 2.1
4000cccccccccccd 2.100000
Logdump 59 >float 2.2
400199999999999a 2.200000
Logdump 60 >float 0x4000cccccccccccd
4000cccccccccccd 2.100000
Logdump 61 >float 0x400199999999999a
```

```

400199999999999a 2.200000
Logdump 62 >float %H400199999999999a
400199999999999a 2.200000
Logdump 63 >float 2.2 FMT %e
400199999999999a 2.200000e+00
Logdump 64 > float 2.2 FMT %g
400199999999999a 2.2
Logdump 65 >float 0x4000cccccccccccd FMT %g
4000cccccccccccd 2.1
Logdump 66 >float 2.2e+01
4036000000000000 22.000000
Logdump 67 >float 2.2e-05
3ef711947cfa26a2 0.000022

```

### Example 2

The following example are the results that display the NaN and sNaN supported special values after the hex representation of a number.

```

Logdump 113 >float 0x7FF0000000000000
7ff0000000000000 inf
Logdump 114 >float 0xFFFF000000000000
fff0000000000000 -inf
Logdump 115 >float 0xffff800000000000 # this is -sNaN
fff8000000000000 -nan
Logdump 116 >float 0x7FF0000000000001
7ff0000000000001 nan
Logdump 117 >float inf
7ff0000000000000 inf
Logdump 118 >float nan # the printed hex result is actually IEEE 754 sNaN
7ff8000000000000 nan
Logdump 119 >float snan # snan is not recognized by float
0000000000000000 0.000000

```

## GGSAUDITREAD

Use `GGSAUDITREAD` to read the TMF audit trail. `GGSAUDITREAD` bypasses TMFARLIB and causes `Logdump` to open and read the TMF trail directly. This command is strictly for use by Oracle GoldenGate support analysts.

### Default

Disabled

### Syntax

```
GGSAUDITREAD audit_trail_file
```

## GGSTOKEN

Use `GGSTOKEN` to include Oracle GoldenGate tokens in the record display. An Oracle GoldenGate token is internal information that the Oracle GoldenGate application places in the record for its own use. Oracle GoldenGate tokens are not for use by Oracle GoldenGate users.

Without arguments, `GGSTOKEN` displays the status of Oracle GoldenGate token display (ON or OFF).

Oracle GoldenGate tokens on NonStop are:

```
"TRANSID"  
"BEGINSEQNO"  
"BEGINRBA"  
"BEGINTIMESTAMP"  
"PARENTNODE"  
"PROCESSNAME"  
"PROGRAMNAME"  
"HOMENODE"  
"CHILDLIST"
```

Oracle GoldenGate tokens on Windows and UNIX are:

```
"ORAROWID"  
"TRANID"  
"MARKER"  
"FETCHEDDATA"  
"FORCEDCOMMIT"  
"DDL"  
"LOGCSN"  
"GROUPNAME"  
"VAMSEQID"
```

## Default

OFF

## Syntax

```
GGSTOKEN {ON | OFF | DETAIL}
```

ON

Enables the display of Oracle GoldenGate tokens.

OFF

Disables the display of Oracle GoldenGate tokens.

DETAIL

Adds the token ID and length to the display.

## Examples

### Example 1

```
GGSTOKEN ON
```

This shows something similar to the following:

```
GGS tokens:  
5200 1400 4141 4148 6561 4141 4641 4141 4141 4141 4F41 : R...AAAHeaAAFAAAAA0A  
4143 0001 : AC..
```

### Example 2

```
GGSTOKEN DETAIL
```

This shows something similar to the following:

```
GGS tokens:  
TokenID R (x52), Info 0, Length 20  
4141 4148 8561 4141 4641 4141 4141 4141 4F41 4144 0001 : AAAHeaAAFAAAAA0AAD..
```

## GGSTOKEN

Valid for Oracle.

Use `GGSTOKEN` to control whether or not Oracle GoldenGate automatically generated token data is displayed with each record. It applies to the automatically generated tokens like the transaction id, row id, fetching status and tag value. These values are stored in the record header and can be mapped to a target column or used for some other purpose during Oracle GoldenGate processing.

Without arguments, `GGSTOKEN` displays the status of user token display (ON or OFF). With the ON option, the name of the token and its length are displayed. The DETAIL option shows the actual token data.

### Default

Display token name and length.

### Syntax

```
GGSTOKEN {ON | OFF | DETAIL}
```

#### ON

Enables the display of automatically generated tokens.

#### OFF

Disables the display of automatically generated tokens.

#### DETAIL

Displays the automatically generated tokens including the transaction ID (XID), the row id for DML operations, the fetching status (if applicable), and tag value.token data.

## GHDR

Use `GHDR` to control whether or not the record header is displayed with each record. Each record contains a header that includes information about the transaction environment. Without arguments, `GHDR` displays the status of header display (ON or OFF).

### Default

OFF

### Syntax

```
GHDR {ON | OFF}
```

## HASHCLEAR

Use `HASHCLEAR` to release memory allocated to the hash list that is generated by the `HASHSTATS` command.

An alias for `HASHCLEAR` is `HASHRESET`.

### Default

None

### Syntax

HASHCLEAR

## HASHSTATS

Use HASHSTATS to enable or disable the display of statistics about file name hashing after a COUNT DETAIL command. The command without arguments displays whether the hash statistics are enabled or disabled. Use the HASHCLEAR or HASHRESET command to clear the memory allocated to the hash list.

### Default

OFF

### Syntax

HASHSTATS {ON | OFF}

### Example

The following is the result when HASHSTATS is enabled. It appears at the end of the COUNT DETAIL display.

```
Files      7, Coll      0, Chain      0
Avg Hash lookup time      5 across 1093 lookups
```

## HEADERTOKEN

Use HEADERTOKEN to control whether or not header token indicators are displayed with each record. The header token indicators are the following:

G — record header (begin of record)

H — header area

D — data area

T — Oracle GoldenGate internal token

U — user token area (does not display if user tokens are not in use)

Z — end of record

Without arguments, HEADERTOKEN displays the status of header token indicators (ON or OFF).

### Default

OFF

### Syntax

HEADERTOKEN {ON | OFF | DETAIL}

ON

Enables the display of header tokens.

**OFF**

Disables the display of header tokens.

**DETAIL**

Provides detailed token values.

**Examples****Example 1**

HEADERTOKEN, without DETAIL

```
TokenID G, Info 0, Length 117
TokenID H, Info 0, Length 45
TokenID D, Info 0, Length 28
TokenID T, Info 0, Length 24
TokenID Z, Info 0, Length 117
```

**Example 2**

HEADERTOKEN with DETAIL

```
TokenID G, Info 0, Length 146
TokenID H, Info 0, Length 42
  4504 0041 3C00 05FF 402F AE6C 572A F102 F818 8F02 : E..A<....@/.1W*.....
  0000 0000 1000 0000 0152 0000 0001 4852 2E4A 4F42 : .....R....FR.JOB
  5300
TokenID D, Info 0, Length 60
TokenID T, Info 0, Length 24
TokenID Z, Info 0, Length 146
```

## HELP

Use `HELP` to view the syntax of Logdump commands.

**Default**

None

**Syntax**

`HELP`

## HISTORY

Use `HISTORY` to view the most recently issued Logdump commands since the session started, or to reset the command count starting at line 1 again. `HISTORY` can be shortened to `HIST`.

**① Note**

You can use the `FC` command to re-execute a command in the list. See "[FC](#)"

**Default**

Display recent commands

## Syntax

```
HISTORY [n] [CLEAR]
```

**n**

Returns the specified number of previously issued commands, where **n** is any positive number.

**CLEAR**

Deletes the command history buffer and reverts the command line to 1.

## Example

```
HISTORY 3
```

The results of this command would be similar to:

```
1: ghdr on
2: detail on
3: scanforheader
```

# INTERPRETINTERVAL

Use **INTERPRETINTERVAL** to display a 64-bit Julian time interval in the format of *days-hh:mm:ss.ms.us*.

## Default

None

## Syntax

```
INTERPRETINTERVAL interval_string
```

**interval\_string**

A string representing the interval to be converted.

## Example

```
INTERPRETINTERVAL 1234567
```

This produces the following result:

```
Interval 1234567 is 0-00:00:01.234.567
```

# INTERPRETTIMESTAMP

Use **INTERPRETTIMESTAMP** to display a 64-bit Julian timestamp as an ASCII value.

## Default

None

## Syntax

```
INTERPRETTIMESTAMP timestamp
```

**timestamp**

A JULIANTIMESTAMP value.

**Example**

```
INTERPRETTIMESTAMP 211976584185800569
```

This produces the following result:

```
2005/03/03 04:29:45.800.569 GMT
2005/03/02 20:29:45.800.569 LCT
```

## LOG

Use `LOG` to start and stop the logging of Logdump sessions. When enabled, logging remains in effect for all sessions of Logdump until disabled with the `LOG STOP` command. Without arguments, `LOG` displays the status of logging (ON or OFF). An alias for `LOG` is `OUT`.

**Default**

Disabled

**Syntax**

```
LOG {file_name | STOP}
```

**file\_name**

Specifies the name of the log file. Specify a full path name to store the file in a directory other than the current working directory.

**STOP**

Stops logging.

**Example**

```
LOG /home/ggs/dirrpt/logdumpout.txt
```

**Example**

```
LOG $data01.glogg1.sesslog
```

## Metadata ddlformat

Use `Metadata ddlformat` on a NonStop system to display the TDR columns in Nonstop DDL format.

**Default**

OFF

**Syntax**

```
Metadata ddlformat {ON | OFF}
```

## Metadata defgenformat

Use `Metadata defgenformat` on a NonStop system to display the columns in a TDR in the format of a GG definition from a definition file.

### **Default**

OFF

### **Syntax**

```
Metadata defgenformat {ON | OFF}
```

## Metadata detail

Use `Metadata detail` on a NonStop system to display the tokens and values that make up a metadata.

### **Default**

OFF

### **Syntax**

```
Metadata detail {ON | OFF | DATA}
```

## Metadata sqlformat

Use `Metadata sqlformat` on a NonStop system to display the columns in a TDR in the format of a SQL table create.

### **Default**

OFF

### **Syntax**

```
Metadata sqlformat {ON | OFF}
```

## NEXT

Use `NEXT` to display the next record or records in the file. The default displays only the next record. `NEXT` can be shortened to `N`. An alias for `NEXT` is `RECORD`.

### **Default**

Display the next 1 record

### **Syntax**

```
NEXT [n]
```

`n`

Displays the specified number of subsequent records.

**Example**

NEXT 10

## NEXTTRAIL

Use NEXTTRAIL to close an open trail file and open the next one in the sequence. An alias for NEXTTRAIL is NT.

**Default**

None

**Syntax**

NEXTTRAIL

## NOTIFY

Use NOTIFY to display the number of records scanned, the trail position, and the record timestamp at specified intervals when using COUNT and records are being suppressed from display through filtering options. An alias for NOTIFY is NOTIFYINTERVAL.

Instead of displaying each notify interval on a separate line, you can configure Logdump to simply update a single line with each new scan result. See "[SCANSCROLLING](#)".

**Default**

None

**Syntax**NOTIFY *interval***interval**

The notification interval expressed as a number of records.

**Example**

The following shows the usage and result of this command.

```
Logdump 26> NOTIFY 1000
Logdump 27> FILTER INCLUDE FILE sales.res*
Logdump 28> COUNT
Scanned 1000 records, RBA 160380,2011/02/01 08:53:47.768.255
Scanned 2000 records, RBA 729961,2011/02/01 08:56:09.916.128
Scanned 3000 records, RBA 2032683,2011/02/01 08:56:09.916.128
Scanned 4000 records, RBA 3244585,2011/02/01 08:56:09.916.128
Scanned 5000 records, RBA 4568766,2011/02/01 08:56:09.916.128
```

## OBEY

Use OBEY to process a file that contains a list of Logdump commands. OBEY is useful for executing commands that are frequently used in sequence.

OBEY can be shortened to O. An alias for OBEY is SOURCE.

**Default**

None

**Syntax**

OB<sup>E</sup>Y *file\_name*

***file\_name***

The fully qualified name of the file containing the list of commands.

**Example**

This is a UNIX example.

```
OBEY ./ldcommands.txt
```

**Example**

This is a NonStop example.

```
OBEY $DATA01.GGSPARM.OBEY1
```

The preceding command executes a file that might look something like this:

```
ghdr on
usertoken on
detail
filter enable
filter clear
filter match all
```

## OPEN

Use OPEN to open a trail file or extract file in Logdump. Without arguments, the command displays the name of the file that is currently open. Aliases for OPEN are FROM and LOGTRAIL.

**Default**

None

**Syntax**

OPEN *file\_name*

***file\_name***

The fully qualified path name of the trail file or extract file to be opened. To specify a trail file, specify the trail name (a two-character prefix) and the sequence number, for example jd000000.

**Example**

This is a UNIX example.

```
OPEN /home/ggs/dirdat/jd000000
```

**Example**

This is a NonStop example.

```
OPEN $data01.gloggl.aa000000
```

## POSITION

Use POSITION to set the read position in the file. The position of a record in the file is noted in the record header in the `AuditPos` field.

Without options, POSITION displays the current read position. Options let you specify an exact position. After you set the position, issue the NEXT command to view the record at that position.

POSITION can be shortened to POS.

### Default

None

### Syntax

```
POSITION [bytes | {0 | FIRST}]
```

#### *bytes*

Specifies the number of bytes into the file at which to read. Use the NEXT command to view the specified record.

#### 0 | FIRST

Positions Logdump at the beginning of the file.

### Syntax

```
POS 77580548
```

## RECLEN

Use RECLEN to control how much of the record data is displayed. You can use RECLEN to control the amount of scrolling that must be done when records are large, while still showing enough data to evaluate the record. Data beyond the specified length is truncated.

### Default

140 bytes

### Syntax

```
RECLEN n
```

#### *n*

The number of bytes of the record that is displayed.

### Example

```
RECLEN 280
```

## SAVE

Use SAVE to write a subset of the records to a new trail or extract file. By saving a subset to a new file, you can work with a smaller file that is easier to debug. Saving to another file also

enables you to extract valid records that can be processed by Oracle GoldenGate, while excluding records that may be causing errors.

To set the version of the trail or file (to old or new format), use the TRAILFORMAT command.

## Default

None

## Syntax

```
SAVE file_name [!] {n records | n bytes}  
[NOCOMMENT]  
[OLDFORMAT | NEWFORMAT]  
[TRANSIND indicator]  
[TRUNCATE]
```

### ***file\_name***

The name of the new file. To specify a trail file, specify the two-character trail name and a sequence number, for example `rt000001`.

!

Overwrites the specified file, if the same file already exists. First a purge is done, and then the specified records are saved to the file.

### ***n records* | *n bytes***

Specifies either a number of records or a number of data bytes to write to the new file. The *n* number of records or bytes are taken forward from the current position in the file. You can change the position with the **POSITION** command. See "["POSITION"](#)".

### **`EXT ( pri, sec [, max] )`**

Specifies savefile extent sizes. This option is valid on NonStop only.

### **`MEGABYTES n`**

Specifies the size of a savefile extent. This option is valid on NonStop only.

### **`NOCOMMENT`**

Suppresses the leading and trailing comment records that are placed by default in the new file. These records describe the context of the file. The begin comment record contains source trail information and the position where the save started. The end comment record identifies the end of the saved data. These headers are useful to separate different sets of records that are saved to the same file, but can be omitted.

### **`OLDFORMAT | NEWFORMAT`**

Writes the data in either the current trail format (**NEWFORMAT**, the default) or the format that was used for Oracle GoldenGate versions 6.0 and earlier (**OLDFORMAT**).

### **`TRANSIND indicator`**

Sets the **TransInd** header field in the records written to one of the following:

```
FIRST  
MIDDLE  
END  
ONLY
```

This allows you to reorder records in a transaction. **TRANSIND** applies to all records written by a **SAVE** command.

**TRUNCATE**

Purges an existing file before saving new information to it.

**Example**

```
SAVE /home/ggs/dirdat/rt000001 10 records nocomment
```

**Example**

```
SAVE $data01.gloggl.ss000000 100 records
```

## SCANFORENDTRANS

Use SCANFORENDTRANS to scan for a record that has a transaction indicator of 2 or 3, as shown in the TransInd field of the header. When one of those indicators is found, Logdump displays the first record of the next transaction.

The indicators represent the following:

- 2 — last record in the transaction
- 3 — only record in the transaction

SCANFORENDTRANS can be shortened to SFET.

**Default**

None

**Syntax**

```
SCANFORENDTRANS
```

## SCANFORHEADER

Use SCANFORHEADER to go to the next record header. Before using this command, use the GHDR ON command to show record headers (see "[GHDR](#)"). SCANFORHEADER can be shortened to SFH.

**Default**

None

**Syntax**

```
SCANFORHEADER [PREV]
```

**PREV**

Displays the previous record header.

## SCANFORMATADATA

Use SCANFORMATADATA to scan for a specific metadata record. SCANFORMATADATA can be shortened to SFMD.

**Default**

None

## Syntax

```
SCANFORMETADATA [DDR|TDR] [Index|NEXT]  
SFMD [DDR|TDR] [Index|NEXT]
```

### DDR | TDR

Specifies the type of metadata record to search for, either a Database Definition Record (DDR) or Table Definition Record (TDR)..

### *Index* / *NEXT*

Specifies an index to go to or the next record in the file.

## Example

```
scanformetadata tdr
```

# SCANFORRBA

Use SCANFORRBA to scan for the record at a relative byte address specified by the AuditRBA field of the record header. Before using this command, use the GHDR command to show record headers (see "[GHDR](#)"). SCANFORRBA can be shortened to SFR.

### Default

None

## Syntax

```
SCANFORRBA relative_byte_address [file_name]
```

### *relative\_byte\_address*

Specifies the relative byte address to find.

### *file\_name*

Constrains the search to an Enscribe or SQL data file. A file name is required even if you are searching a file that is open in Logdump.

## Example

```
SCANFORRBA 321 /home/ggs/dirdat/rt000000
```

## Example

```
SCANFORRBA 321 $data01.gloggl.rt000000
```

# SCANFORTIME

Use SCANFORTIME to scan for a record that contains a specific timestamp. The timestamp is contained in the IO Time field of the record header. Before using this command, use the GHDR command to show record headers (see "[GHDR](#)"). SCANFORTIME can be shortened to SFTS.

### Default

None

## Syntax

```
SCANFORTIME time_string [, name]
```

### *time\_string*

Scans for a specific timestamp. For the time string, use the format of:

```
[yy]yy-mm-dd [hh[:mm][:ss]]
```

### *name*

Constrains the search to a specific table or data file name, or a group of names specified with a wildcard.

## Example

```
SCANFORTIME 2011-01-27 14:33:57
```

# SCANFORTYPE

Use SCANFORTYPE to scan for the next record of the specified type. SCANFORTYPE can be shortened to SFT.

## Default

None

## Syntax

```
SCANFORTYPE {type_name | type_number}
```

### *type\_name* | *type\_number*

Specifies the type of record to search for, either by type name or type number. To view a list of record types and their associated numbers, use the SHOW RECTYPE command (see "[SHOW](#)").

## Example

Both of the following commands return the same result: They display commit records.

```
SCANFORTYPE Commit  
SFT 2
```

# SCANSROLLING

Use SCANSROLLING to configure Logdump to update a single line after COUNT scans when NOTIFY is enabled. Otherwise, each scan notification appears on a different line. See "[NOTIFY](#)" for more information.

## Default

OFF

## Syntax

```
SCANSROLLING {ON | OFF}
```

### ON

Enables the use of a single line for count notification results.

**OFF**

Disables the use of a single line, causing a separate line to be used for each notification.

# SHOW

Use `SHOW` to display internal Logdump information, including files that are open if the system is NonStop, the current Logdump environment, a list of Oracle GoldenGate record types, and current filter settings. `SHOW` can be shortened to `SH` or `SHO`.

**Default**

None

**Syntax**

```
SHOW
[ENV]
[FILTER]
[OPEN]
[RECTYPE]
```

**ENV**

Displays the current Logdump environment. Same as the `ENV` command (see "[ENV](#)").

**FILTER**

Displays current filter settings.

**OPEN**

Shows all NonStop files that are open in Logdump.

**RECTYPE**

Displays a list of Oracle GoldenGate record types that can be displayed with Logdump.

**Examples****Example 1**

```
SHOW FILTER
```

This shows something similar to the following on Windows or UNIX:

```
Data filters are ENABLED
Include Match ALL
Filename-0 : $QA01.QAESRC.ACCT*
HEX-0      : ( 4), Col 0:3
0000 4BF6
Exclude Match ANY
```

It shows something similar to the following on NonStop:

```
Data filters are ENABLED
Include Match ALL
Rectypes   : Delete
Filename-0 : hr.regions
Exclude Match ANY
```

**Example 2**

```
SHOW OPEN
```

This shows something similar to the following:

```
0 : $RECEIVE
1 : \GGS2.$ZTN2.#PTW6EUX
2 : \GGS2.$DATA4.#0009047
3 : \GGS2.$ZTN2.#PTW6EUX
4 : \GGS2.$DATA4.CPSDAT.TM000000
```

### Example 3

```
SHOW RECTYPE
```

This shows results similar to the following. (This list might not reflect all possible record types. New types are added when needed to support new functionality.)

```
1 - Abort
2 - Commit
3 - Delete
4 - EndRollBack
5 - Insert
6 - Prepared
7 - TMF-Shutdown
8 - TransBegin
9 - TransRelease
10 - Update
11 - UpdateComp
12 - FileAlter
13 - FileCreate
14 - FilePurge
15 - FieldComp
16 - FileRename
17 - AuxPointer
18 - NetworkCommit
19 - NetworkAbort
20 - CurrentPos
89 - SQL/MX DDL OP
90 - GGSSQLCol
100 - GGSPurgedata
101 - GGSPurgeFile
102 - GGSCreateFile
103 - GGSAlterFile
104 - GGSRenameFile
105 - GGSSetmode
107 - GGSControl
106 - GGSChangeLabel
160 - DDL OP
115 - GGSKeyFieldComp
117 - GGSKeyFieldComp32
161 - RecordFragment
116 - LargeObject
132 - GGSCreateSequence
```

```
133 - GGSAlterSequence
134 - GGSDropSequence
150 - RestartAbend
151 - RestartOK
152 - RecoveryEnd
200 - GGSBulkio
201 - GGSFileClose
202 - GGSLoggerTS
203 - GGSExtractTS
204 - GGSCollectTS
205 - GGSComment
250 - LibOpenTrace
251 - LibCloseTrace
252 - LoggerOpenTrace
253 - LoggerCloseTrace
254 - LoggerAddedInfo
249 - LoggerAddedStats
```

## SKIP

Use SKIP to skip the specified number of records.

### **Default**

None

### **Syntax**

```
SKIP n
```

*n*

The number of records to skip.

### **Example**

```
SKIP 50
```

## TIME

Use TIME to display the current time in local and GMT formats.

### **Default**

None

### **Syntax**

```
TIME
```

## TIMEOFFSET

Use TIMEOFFSET to set the Logdump time format. Without arguments, TIMEOFFSET displays the current time offset. Options enable you to set the time to the local time, Greenwich Mean Time

(GMT), or a specific offset from GMT. The specified time format applies to the timestamps shown in records as well as any Logdump commands that accept a time string argument.

### Default

LOCAL

### Syntax

TIMEOFFSET {LOCAL | GMT | GMT + *hh[:mm]* | GMT - *hh[:mm]*}

**LOCAL**

Sets the time to that of the local system.

**GMT**

Sets the time to Greenwich Mean Time (GMT).

**GMT + *hh[:mm]***

Sets the time ahead of GMT by the specified number of hours and, optionally, minutes.

**GMT - *hh[:mm]***

Sets the time behind GMT by the specified number of hours and, optionally, minutes.

### Example

TIMEOFFSET GMT -01

## TMFBEFOREIMAGE

Use TMFBEFOREIMAGE on a NonStop system to view the before image for update operations from TMF audit.

### Default

OFF

### Syntax

TMFBEFOREIMAGE {ON | OFF}

**ON**

Displays the before image for update operations from the TMF audit.

**OFF**

Displays only the after image for update operations from the TMF audit.

### Example

A sample display for TMFBEFOREIMAGE ON is shown below.

```
2011/01/12 10:02:34.325.264 FieldComp          Len    38 RBA 615854956
Name: \NY.$DATA1.GGSDAT.TCUSTMER
Before Image:                                         Partition 0
0000 0004 414E 4E20 0002 0014 5345 4154 544C 4520 | ....ANN ....SEATTLE
2020 2020 2020 2020 2020 0003 0002 5741           | ....WA
2011/01/12 10:02:34.325.264 FieldComp          Len    38 RBA 615854956
Name: \NY.$DATA1.GGSdat.TCUSTMER
After Image:                                         Partition 0
TRANSID      : \NY(2).0.7022034 (7998393398406021122)
```

```
0000 0004 414E 4E20 0002 0014 4E45 5720 594F 524B | ....ANN ....NEW YORK
2020 2020 2020 2020 2020 0003 0002 4E59 | ....NY
```

## TMFBEFOREIMAGE

Use **TMFBEFOREIMAGE** on a NonStop system to set the TMFARLIB to fetch the before image of the record and display it with the after image. Without an argument, this command displays whether the fetching of before images is on or off.

### Default

OFF

### Syntax

```
TMFBEFOREIMAGE {ON | OFF}
```

## TMFGETRECADDR | NOTMFGETRECADDR

Use **TMFGETRECADDR** and **NOTMFGETRECADDR** on a NonStop system to control the ability of Logdump to call the `ARGETRECADDR()` function of TMFARLIB. This function is used when examining a TMF audit trail.

### Default

None

### Syntax

```
TMFGETRECADDR | NOTMFGETRECADDR
```

#### TMFGETRECADDR

Enables the use of the `ARGETRECADDR()` function.

#### NOTMFGETRECADDR

Disables the use of the `ARGETRECADDR()` function.

## TMFIGNORERECCOUNT

Use **TMFIGNORERECCOUNT** on a NonStop system to set the number of records that the TMFARLIB can ignore before returning a `CURRENTPOSITION` record.

### Default

None

### Syntax

```
TMFIGNORERECCOUNT n
```

## TRAILFORMAT

Use **TRAILFORMAT** to set the version of the Oracle GoldenGate trail or extract file that is being saved when using the `SAVE` command.

**Default**

NEW

**Syntax**

TRAILFORMAT {NEW | OLD}

NEW

Sets the format to that used by Oracle GoldenGate version 6.0 and later.

OLD

Sets the format to that used by Oracle GoldenGate versions earlier than 6.0.

## TRANSBYTELIMIT

Use TRANSBYTELIMIT to prevent normal-sized transactions from being tracked in the transaction table specified with the TRANSHIST command. It sets a lower boundary for the number of bytes in a transaction and should be set to represent a normal-sized transaction for the environment being evaluated with Logdump. Setting a boundary reduces the amount of data that is stored and, consequently, the amount that must be reviewed when troubleshooting.

**Default**

10000 bytes

**Syntax**TRANSBYTELIMIT *n**n*

The number of bytes in a normal-sized transaction.

**Example**

TRANSBYTELIMIT 9000

## TRANSHIST

Use TRANSHIST to keep track of the size of transactions in a trail or file. Logdump tracks the transactions in an internal history table in descending order according to the number of bytes of data in each one. When the history table is full, the smallest transaction is removed to allow a larger transaction to be added to the list.

Use TRANSHIST in conjunction with other Logdump commands to determine whether or not your applications generate large transactions and to identify their relative size. This information can be used when deciding how to group tables into different processing groups for faster throughput. For more information, see "[Evaluating Transaction Size](#)".

** Note**

You can use the SEND EXTRACT command with the SHOWTRANS option to view a list of long-running transactions. Other options enable you to control whether those transactions are ignored or processed by Oracle GoldenGate.

**Default**

0 (do not maintain history)

**Syntax**

TRANSHIST *n*

*n*

Sets the size of the history table, in bytes. Valid values are 0 through 200 bytes. A value of 0 means that no transaction history is maintained.

**Example**

```
TRANSHIST 150
```

## TRANSRECLIMIT

Use TRANSRECLIMIT to prevent normal-sized transactions from being tracked in the transaction table specified with the TRANSHIST command. It sets a lower boundary for the number of records in a transaction and should be set to represent a normal-sized transaction for the environment being evaluated with Logdump. Setting a boundary reduces the amount of data that is stored and, consequently, the amount that must be reviewed when troubleshooting.

**Default**

100 operations

**Syntax**

TRANSRECLIMIT *n*

*n*

The number of records in a normal-sized transaction.

**Example**

```
TRANSRECLIMIT 90
```

## USERTOKEN

Use USERTOKEN to control whether or not user token data is displayed with each record. A user token is data specified by an Oracle GoldenGate user that is stored in the record header and can be mapped to a target column or used for some other purpose during Oracle GoldenGate processing.

Without arguments, USERTOKEN displays the status of user token display (ON or OFF). With the ON option, the name of the token and its length are displayed. The DETAIL option shows the actual token data.

**Default**

Display token name and length.

**Syntax**

```
USERTOKEN {ON | OFF | DETAIL}
```

**ON**

Enables the display of user tokens.

**OFF**

Disables the display of user tokens.

**DETAIL**

Displays the token data.

## VOLUME

Use `VOLUME` to set the default directory, volume or subvolume. An alias for this command is `CD`.

**Default**

None

**Syntax**

```
VOLUME {directory | volume | subvolume}
```

## WRITELOG

Use `WRITELOG` to write text to the session log. Before using this command, start logging with the `LOG` command (see "[LOG](#)").

**Default**

None

**Syntax**

```
WRITELOG text
```

**text**

Any text string. Quotes are optional.

**Example**

```
WRITELOG "Customer name is ABC Company."
```

## X

Use `x` to execute a program from within Logdump. When you exit the program, the Logdump prompt returns.

**Default**

None

**Syntax**

```
x program [string]
```

**command**

The program to run.

***string***

A character string, such as input arguments.

**Example**

The following series of commands and output shows how you can exit Logdump, issue other commands from the shell or within GGSCI, and then return to the Logdump command line.

```
Logdump 696 >x ggsci
```

```
GoldenGate Command Interpreter
Version .....
```

```
GGSCI (sysa) 1> status er *
GGSCI (sysa) 2> start er *
GGSCI (sysa) 3> info er *
GGSCI (sysa) 4> exit
Logdump 697 >
```