

# Oracle® Database

## JavaScript Developer's Guide



Release 23c

F56885-04

February 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Oracle Database JavaScript Developer's Guide, Release 23c

F56885-04

Copyright © 2022, 2024, Oracle and/or its affiliates.

Primary Author: Sarah Hirschfeld

Contributors: M. Bach, L. Braun-Lohrer, H. Kasture, A. Ulrich, G. Venzl, M. Brantner, L. Daynes, H. Guiroux, A. Schubert, A. Burlison, M. Keppner, A. Kashuba, N. Sheikh, A.A. Baha, D. Adams

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## 1 Introduction to Oracle Database Multilingual Engine for JavaScript

---

The Need for a Multilingual Engine	1-2
Overview of JavaScript	1-3
Overview of Multilingual Engine for JavaScript	1-3
JavaScript Implementation Details	1-4
Invoking JavaScript in the Database	1-5
Introduction to Dynamic Execution	1-5
Introduction to MLE Module Calls	1-6
About MLE Execution Contexts	1-8
Introduction to Debugging JavaScript Code	1-9

## 2 MLE JavaScript Modules and Environments

---

Using JavaScript Modules in MLE	2-1
Managing JavaScript Modules in the Database	2-3
Naming JavaScript Modules	2-3
Creating JavaScript Modules in the Database	2-4
Storing JavaScript Code in Databases Using Single-Byte Character Sets	2-5
Code Analysis	2-5
Preparing JavaScript code for MLE Module Calls	2-6
Additional Options for Providing JavaScript Code to MLE	2-8
Specifying Module Version Information and Providing JSON Metadata	2-9
Drop JavaScript Modules	2-10
Alter JavaScript Modules	2-10
Overview of Built-in JavaScript Modules	2-11
Dictionary Views Related to MLE JavaScript Modules	2-11
USER_SOURCE	2-11
USER_MLE_MODULES	2-12
Specifying Environments for MLE Modules	2-13
Creating MLE Environments in the Database	2-13
Naming MLE Environments	2-14
Creating an Empty MLE Environment	2-14
Creating an Environment as a Clone of an Existing Environment	2-15

Using MLE Environments for Import Resolution	2-15
Providing Language Options	2-18
Dropping MLE Environments	2-19
Modifying MLE Environments	2-19
Altering Language Options	2-19
Modifying Module Imports	2-20
Dictionary Views Related to MLE JavaScript Environments	2-20
USER_MLE_ENVS	2-20
USER_MLE_ENV_IMPORTS	2-21

### 3 Overview of Dynamic MLE Execution

---

About Dynamic JavaScript Execution	3-1
Dynamic Execution Workflow	3-2
Providing JavaScript Code Inline	3-2
Loading JavaScript Code from Files	3-3
Returning the Result of the Last Execution	3-6

### 4 Overview of Importing MLE JavaScript Modules

---

JavaScript Module Hierarchies	4-2
Resolving Import Names Using MLE Environments	4-2
Export Functionality	4-3
Named Exports	4-3
Default Exports	4-4
Private Identifiers	4-5
Import Functionality	4-5
Module Objects	4-6
Named Imports	4-6
Default Imports	4-7

### 5 MLE JavaScript Functions

---

Call Specifications for Functions	5-1
Creating a Call Specification for an MLE Module	5-2
Components of an MLE Call Specification	5-4
MLE Module Clause	5-5
ENV Clause	5-5
SIGNATURE Clause	5-6
Creating an Inlined MLE Call Specification	5-7
Components of an Inlined MLE Call Specification	5-9
Accessing Built-in Modules Using JavaScript Global Variables	5-10

Choosing Inlined Versus Module MLE Call Specifications	5-11
Runtime Isolation for an MLE Call Specification	5-11
Dictionary Views for Call Specifications	5-15
OUT and IN OUT Parameters	5-15

## 6 Calling PL/SQL and SQL from the MLE JavaScript SQL Driver

---

Introduction to the MLE JavaScript SQL Driver	6-1
Working with the MLE JavaScript Driver	6-2
Connection Management in the MLE JavaScript Driver	6-3
Introduction to Executing SQL Statements	6-3
Processing Comparison Between node-oracledb and mle-js-oracledb	6-6
Selecting Data Using the MLE JavaScript Driver	6-6
Direct Fetch: Arrays	6-7
Direct Fetch: Objects	6-8
Fetching Rows as ResultSets: Arrays	6-9
Fetching Rows as ResultSets: Iterating Over ResultSet Objects	6-10
Data Modification	6-12
Bind Variables	6-12
Using Bind-by-Name vs Bind-by-Position	6-13
Named Bind Variables	6-13
Positional Bind Variables	6-14
RETURNING INTO Clause	6-15
Batch Operations	6-17
PL/SQL Invocation from the MLE JavaScript SQL Driver	6-19
Error Handling in SQL Statements	6-21
Working with JSON Data	6-25
Using Large Objects (LOB) with MLE	6-29
Writing LOBs	6-30
Reading LOBs	6-31
API Differences Between node-oracledb and mle-js-oracledb	6-32
Synchronous API and Error Handling	6-32
Connection Handling	6-33
Transaction Management	6-34
Type Mapping	6-34
Unsupported Data Types	6-37
Miscellaneous Features Not Available with the MLE JavaScript SQL Driver	6-37

## 7 Working with SODA Collections in MLE JavaScript Code

---

High-Level Introduction to Working with SODA for In-Database JavaScript	7-1
---	-----

SODA Objects	7-2
Using SODA for In-Database JavaScript	7-3
Getting Started with SODA for In-Database JavaScript	7-5
Creating a Document Collection with SODA for In-Database JavaScript	7-7
Opening an Existing Document Collection with SODA for In-Database JavaScript	7-9
Checking Whether a Given Collection Exists with SODA for In-Database JavaScript	7-10
Discovering Existing Collections with SODA for In-Database JavaScript	7-10
Dropping a Document Collection with SODA for In-Database JavaScript	7-11
Creating Documents with SODA for In-Database JavaScript	7-12
Inserting Documents into Collections with SODA for In-Database JavaScript	7-15
Saving Documents into Collections with SODA for In-Database JavaScript	7-17
SODA for In-Database JavaScript Read and Write Operations	7-19
Finding Documents in Collections with SODA for In-Database JavaScript	7-20
Replacing Documents in a Collection with SODA for In-Database JavaScript	7-26
Removing Documents from a Collection with SODA for In-Database JavaScript	7-27
Indexing the Documents in a Collection with SODA for In-Database JavaScript	7-29
Getting a Data Guide for a Collection with SODA for In-Database JavaScript	7-31
Handling Transactions with SODA for In-Database JavaScript	7-32
Summary Example of Using SODA for In-Database JavaScript	7-32

## 8 Post-Execution Debugging of MLE JavaScript Modules

---

Specifying Debugpoints	8-2
Debugpoint Locations	8-2
Debugpoint Actions	8-2
Debugpoint Conditions	8-4
Managing Debugpoints	8-4
Debugging Security Considerations	8-6
COLLECT DEBUG INFO Privilege for MLE Modules	8-7
Analyzing Debug Output	8-7
Textual Representation of Debug Output	8-7
Analyzing Debug Output Using Developer Tools	8-10
Error Handling in MLE	8-10
Errors in Callouts	8-13
Accessing stdout and stderr from JavaScript	8-13
Accessing stdout and stderr for MLE Modules	8-14
Accessing stdout and stderr for Dynamic MLE	8-16

## 9 MLE Security

---

System and Object Privileges Required for Working with JavaScript in MLE	9-1
--	-----

Necessary Privileges for the Execution of JavaScript Code	9-2
Necessary Privileges for Using the NoSQL API	9-2
Necessary Privileges for Creating MLE Schema Objects	9-3
Necessary Privileges for Creating MLE Modules and Environments in ANY Schema	9-3
Necessary Privileges for Post-Execution Debugging	9-4
Security Considerations for MLE	9-5
Initialization Parameter	9-5
Execution Contexts	9-6
Runtime State Isolation	9-6
Database Security Model	9-8
Considerations for Using MLE Call Specifications and Modules from Different Schemas	9-9
Auditing MLE Operations in Oracle Database	9-10
JavaScript Security Best Practices	9-11
Using Bind Variables for Security and Performance	9-11
Generic Database and PL/SQL Specific Security Considerations	9-13
Supply Chain Security	9-13
Software Bill of Material	9-14
Using the Database to Store State	9-15
Disabling Multilingual Runtime	9-16
MLE Security Examples	9-17
Business Logic Stored in MLE Modules	9-17
Generic Data Processing Libraries	9-19
Generic Libraries in Business Logic	9-20

## A MLE Type Conversions

---

### Index

---

## List of Examples

---

2-1	Creating a JavaScript Module in the Database	2-4
2-2	Create a Call Specification for a Public Function	2-6
2-3	Public and Private Functions in a JavaScript Module	2-7
2-4	Providing JavaScript Source Code Using a BFILE	2-8
2-5	Providing JavaScript Source Code Using a CLOB	2-8
2-6	Specification of a VERSION string in CREATE MLE MODULE	2-9
2-7	Addition of JSON Metadata to the MLE Module	2-10
2-8	Drop an MLE Module	2-10
2-9	Drop an MLE Module Using IF EXISTS	2-10
2-10	Alter an MLE Module	2-10
2-11	Externalize JavaScript Module Source Code	2-12
2-12	Find MLE Modules Defined in a Schema	2-13
2-13	Map Identifier to JavaScript Module	2-16
2-14	Import Module Functionality	2-16
2-15	List Available MLE Environments Using USER_MLE_ENVS	2-21
2-16	List Module Import Information Using USER_MLE_ENV_IMPORTS	2-21
3-1	Using the Q-Quote Operator to Provide JavaScript Code Inline with PL/SQL	3-2
3-2	Loading JavaScript code from a BFILE with DBMS_LOB.LOADCLOBFROMFILE()	3-3
3-3	Loading JavaScript Code from a BFILE by Referencing an MLE Module from DBMS_MLE	3-5
3-4	Returning the Result of the Last Execution	3-6
4-1	Use an MLE Environment to Map an Import Name to a Module	4-2
4-2	Function Export using Named Exports	4-3
4-3	Function Export Using Export Keyword Inline	4-4
4-4	Export a Class Using a Default Export	4-4
4-5	Named Export of Single Function	4-5
4-6	Module Object Definition	4-6
4-7	Named Imports Using Specified Identifiers	4-6
4-8	Named Imports with Aliases	4-7
4-9	Default Import	4-7
4-10	Default Import with Built-in Module	4-8
5-1	Creating MLE Call Specifications	5-2
5-2	Simple Inlined MLE Call Specification	5-8
5-3	Inlined MLE Call Specification Returning JSON	5-8
5-4	Execution Context Dependencies	5-12
5-5	Show JavaScript Call Specification Metadata	5-15



5-6	OUT and IN OUT Parameters with JavaScript	5-16
6-1	Getting Started with the MLE JavaScript SQL Driver	6-3
6-2	Use Global Variables to Simplify SQL Execution	6-5
6-3	Selecting Data Using Direct Fetch: Arrays	6-7
6-4	Selecting Data Using Direct Fetch: Objects	6-8
6-5	Fetching Rows Using a ResultSet	6-9
6-6	Using the Iterable Protocol with ResultSets	6-10
6-7	Using the Iterator Protocol with ResultSets	6-11
6-8	Updating a Row Using the MLE JavaScript SQL Driver	6-12
6-9	Using Named Bind Variables	6-13
6-10	Using Positional Bind Variables	6-15
6-11	Using the RETURNING INTO Clause	6-16
6-12	Performing a Batch Operation	6-17
6-13	Calling PL/SQL from JavaScript	6-19
6-14	SQL Error Handling Inside a JavaScript Function	6-22
6-15	Error Handling Using JavaScript throw() Command	6-23
6-16	Inserting JSON Data into a Database Table	6-26
6-17	Use JavaScript to Manipulate JSON Data	6-28
6-18	Inserting a CLOB into a Table	6-30
6-19	Read an LOB	6-31
6-20	Using JavaScript Native Data Types vs Using Wrapper Types	6-35
6-21	Overriding the Global oracledb.fetchAsPlsqlWrapper Property	6-36
7-1	SODA with MLE JavaScript General Workflow	7-5
7-2	Creating a Collection with Custom Metadata	7-8
7-3	Opening an Existing Document Collection	7-9
7-4	Fetching All Existing Collection Names	7-10
7-5	Filtering the List of Returned Collections	7-10
7-6	Dropping a Collection	7-12
7-7	Creating SODA Documents	7-13
7-8	Inserting a SODA Document into a Collection	7-15
7-9	Inserting an Array of Documents into a Collection	7-16
7-10	Saving a Document into a Collection	7-17
7-11	Finding a Document by Key	7-20
7-12	Looking up Documents Using Multiple Keys	7-21
7-13	Using a QBE to Filter Documents in a Collection	7-22
7-14	Using skip() and limit() in a Pagination Query	7-23
7-15	Specifying Document Versions	7-24

7-16	Counting the Number of Documents Found	7-25
7-17	Replacing a Document in a Collection and Returning the Result Document	7-26
7-18	Removing a Document from a Collection Using a Document Key	7-27
7-19	Removing JSON Documents from a Collection Using a Filter	7-28
7-20	Creating a B-Tree Index for a JSON Field with SODA for In-Database JavaScript	7-29
7-21	Creating a JSON Search Index with SODA for In-Database JavaScript	7-30
7-22	Dropping an Index with SODA for In-Database JavaScript	7-31
7-23	Generating a Data Guide for a Collection	7-32
7-24	Use SODA for In-Database JavaScript	7-33
8-1	JSON Template for Specifying Debugpoints	8-2
8-2	JSON Template for Specifying Watch Action	8-3
8-3	JSON Template for Specifying Snapshot Action	8-4
8-4	Watching a Variable in an MLE Module	8-4
8-5	Enabling Debugging of an MLE Module	8-5
8-6	Obtain Textual Representation of Debug Output	8-8
8-7	Throwing ORA-04161 Error and Querying the Stack Trace	8-11
8-8	Redirect stdout to CLOB and DBMS_OUTPUT for MLE Module	8-14
8-9	Redirect stdout to CLOB and DBMS_OUTPUT for Dynamic MLE	8-16
9-1	Runtime State Isolation Scenario	9-7
9-2	Using Bind Variables Rather than String Concatenation	9-12
9-3	Use DBMS_ASSERT to Verify Valid Input	9-12
9-4	Using Bind Variables Rather than String Concatenation	9-15
9-5	Use DBMS_ASSERT to Verify Valid Input	9-15
9-6	Business Logic Stored in MLE Modules	9-17
9-7	Generic Data Processing Libraries	9-19
9-8	Use Generic Libraries in Business Logic	9-20

## List of Figures

---

5-1	MLE Call Specification Syntax	5-4
5-2	MLE Inlined Call Specification Syntax	5-9
7-1	SODA for In-Database JavaScript Basic Workflow	7-2

## List of Tables

---

2-1	JavaScript Language Options	2-18
5-1	Components of an MLE Call Specification	5-4
5-2	Components of an Inlined MLE Call Specification	5-9
7-1	Overview of Nonterminal Methods for Read Operations	7-19
7-2	Overview of Terminal Methods for Read Operations	7-19
7-3	Overview of Terminal Methods for Write Operations	7-20
A-1	Supported Mappings from SQL and PL/SQL Types to JavaScript Types	A-2
A-2	Supported Mappings from JavaScript Types to SQL Types	A-3
A-3	Mapping from JSON Attribute Types and Values to JavaScript Types and Values	A-4
A-4	Mapping from JavaScript Types and Values to JSON Attributes and Values	A-5

# 1

## Introduction to Oracle Database Multilingual Engine for JavaScript

Oracle Database supports a rich set of languages for writing user-defined functions and stored procedures, including PL/SQL, Java, and C. With Oracle Database Multilingual Engine (MLE), developers have the option to run JavaScript code through dynamic execution or with persistent MLE modules stored directly in the database.

The landscape of programming languages is rapidly evolving, with more developers choosing to use modern dynamic languages like JavaScript. Besides simpler syntax and support for modern language features, a key factor in the popularity of these languages is the existence of a rich module ecosystem. Developers often choose to use different languages to implement different parts of a project, based on the availability of suitable modules for the given task.

Whether or not a new language reaches widespread adoption frequently depends on community involvement. Once a language reaches some threshold of popularity, its ecosystem often starts expanding rapidly, attracting more and more developers. Many times, a rich set of features, libraries, and reusable code modules are created to support more widespread use.

The Oracle Database is renowned for its support of a rich ecosystem of programming languages. The most common programmatic server-side interface to the Oracle Database is PL/SQL. By using PL/SQL it is possible to keep business logic and data together, oftentimes offering significant improvements to efficiency in addition to providing a unified processing pattern for data, regardless of the client interface in use. With MLE, you can utilize PL/SQL to implement JavaScript modules, offering an additional avenue to interact directly with the database.



### See Also:

*Oracle Database Development Guide* for more information about the programming languages supported by the Oracle database.

### Topics

- [The Need for a Multilingual Engine](#)  
The benefits of using MLE to process data within the database are described.
- [Overview of JavaScript](#)  
One of the most popular programming languages today, JavaScript runs on any machine with a JavaScript engine. Developers prefer JavaScript mainly for the ease of scripting to develop end-to-end applications and for fast execution.
- [Overview of Multilingual Engine for JavaScript](#)  
MLE allows you to run and store JavaScript directly in the Oracle Database.

- [Introduction to Debugging JavaScript Code](#)  
MLE allows you to debug your JavaScript code by conveniently and efficiently collecting runtime state during program execution.

## The Need for a Multilingual Engine

The benefits of using MLE to process data within the database are described.

When developers implement a *Smart-DB approach*, application logic and data coexist in the same database. Applying this strategy, the database is used as a full-fledged processing engine as opposed to simply a persistence layer or a simple REST API. Making use of the database for processing data where it lives can provide numerous advantages in the form of enhanced security, potential elimination of network round-trips, and better data quality thanks to the use of referential integrity.

The database's optimizer also benefits from this approach. Using referential integrity constraints allows it to know more about the data it's working with. Performance benefits can also be realized when using set-based SQL and oftentimes, database servers are more powerful than the machines serving the application's front-end, further speeding up processing time.

The Smart-DB approach requires you to be familiar with the programming languages offered by the database system to make the best use of the concept. The only other option is to use a client-side driver to extract data from the database to a middleware system or client machine for processing.

With the ever-increasing data volumes to be handled, especially for batch-processing, transferring large quantities of data from the database to a client can be problematic for the following reasons:

- The transfer of database information between servers is time consuming and can cause significant network overhead
- Latencies are often significantly increased; the cumulative effect can be very noticeable, especially for "chatty" applications
- Processing large data volumes in a middle-tier or client requires these environments to be equipped with large amounts of DRAM and storage, adding cost
- Data transfer between machines, especially in cloud environments, is often subject to regulatory control due to the inherent security risks and data protection requirements

Processing data *within* the database is a common strategy for mitigating against many of these problems.

With the introduction of Oracle Database Multilingual Engine (MLE), JavaScript is added to the database. The inclusion of JavaScript acknowledges the language's popularity and opens its extensive ecosystem for server-side database development.

With MLE, you can use idioms and tools available in JavaScript's ecosystem, as well as deploy and use modules from popular repositories such as Node Package Manager (NPM) right in the database. Furthermore, you can move between application tiers, providing more flexibility to teams dealing with varying workloads. The large pool of JavaScript talent can help staff existing and upcoming projects.

## Overview of JavaScript

One of the most popular programming languages today, JavaScript runs on any machine with a JavaScript engine. Developers prefer JavaScript mainly for the ease of scripting to develop end-to-end applications and for fast execution.

JavaScript (JS) has come a long way since its inception as a browser-based solution for interactive web pages. While its popularity for front-end development remains strong, it has found its way into back-end development as well. For example, Node.js and Deno are very popular in that space.

At its core, JavaScript is an interpreted language with support for many modern programming styles. JavaScript is continually enhanced by a governing body known as ECMA International with new standards released annually.

JavaScript features both a functional as well as an object oriented interface. Despite the name, JavaScript is very different from Java, although its syntax intentionally mimics many constructs known in other popular languages. The learning curve is eased by providing a familiar looking syntax.

Soft factors such as a very large and active community as well as the language's rich set of libraries make it an attractive choice for development.

With the introduction of Oracle Database Multilingual Engine (MLE), it is possible to execute JavaScript directly in the Oracle database. Data-intensive applications can benefit from moving processing logic from the middle-tier to the database.



### See Also:

[Developer.mozilla.org](https://developer.mozilla.org) for more information about JavaScript

## Overview of Multilingual Engine for JavaScript

MLE allows you to run and store JavaScript directly in the Oracle Database.

Using MLE enables users of the Oracle Database to run the following, written in JavaScript:

- Stored procedures
- Stored functions
- Code in a PL/SQL package namespace
- Anonymous, dynamic code snippets (in a way that is similar to `DBMS_SQL`)

MLE is supported when connecting to the database using a dedicated server connection on Linux x86-64. Abstract data types, PL/SQL collections and record types, and `REF CURSORS` are not supported. Additionally, the initialization parameter `MAX_STRING_SIZE` must not have been changed from the default.

**Note:**

Shared server connections and those using Database Resident Connection Pool (DRCP) cannot make use of MLE.

**Topics**

- [JavaScript Implementation Details](#)  
The MLE implementation of JavaScript is compliant with ECMAScript 2022.
- [Invoking JavaScript in the Database](#)  
JavaScript can be invoked through dynamic execution or through call specifications, which either reference MLE modules or inlined JavaScript functions.
- [Introduction to Dynamic Execution](#)  
Anonymous JavaScript code snippets can be executed via the `DBMS_MLE` PL/SQL package.
- [Introduction to MLE Module Calls](#)  
It is possible to create JavaScript modules as schema objects that are stored persistently in the database.
- [About MLE Execution Contexts](#)  
An MLE execution context is a standalone, isolated runtime environment, designed to contain all runtime state associated with the execution of JavaScript code. Runtime state includes global variables as well as the state of the language environment.

## JavaScript Implementation Details

The MLE implementation of JavaScript is compliant with ECMAScript 2022.

Adhering to the ECMA standard, the JavaScript implementation as found in MLE is consciously created as a *pure implementation*. Native JavaScript network and file I/O operations are not supported in the same way that they are in Node.js and Deno for security reasons. The use of network and file I/O is possible with MLE, however, you must employ PL/SQL APIs such as `UTL_HTTP` and `UTL_FILE`.

The WEB API, Fetch, is not available by default in the global space but can be enabled by importing `mle-js-fetch`.

Objects not included in the ECMA standard, including common objects used in front-end code such as the Window object, are also not available with MLE. Nevertheless, MLE does provide easy and efficient access to SQL, which is able to execute close to the data. Console output is passed to `DBMS_OUTPUT` by default but can be redirected and stored in a user provided CLOB if required.

Users require specific privileges before they can interact with MLE. These can broadly be classified into:

- Permission to use MLE and run JavaScript code
- Execute dynamic JavaScript in the database
- Create JavaScript modules and externalize them via PL/SQL code



The database engine throws an error if you lack sufficient privileges required for the use of JavaScript.



#### See Also:

[System and Object Privileges Required for Working with JavaScript in MLE](#) for more information about privileges

## Invoking JavaScript in the Database

JavaScript can be invoked through dynamic execution or through call specifications, which either reference MLE modules or inlined JavaScript functions.

Generally speaking, server-side JavaScript code can be invoked in two ways:

- Dynamically via the `DBMS_MLE` package
- Using PL/SQL code referencing functions exported in JavaScript modules (so-called MLE module calls) or functions defined directly in the DDL

Regardless of which of the two methods is used, all JavaScript code runs in an execution context. Its purpose is to encapsulate all runtime state associated with the processing of JavaScript code. The MLE execution context corresponds to the ECMAScript execution context for JavaScript.



#### See Also:

[Ecma-international.org](http://Ecma-international.org) for more information about the ECMAScript execution context

## Introduction to Dynamic Execution

Anonymous JavaScript code snippets can be executed via the `DBMS_MLE` PL/SQL package.

The procedure `DBMS_MLE.eval()` is used to execute dynamic MLE snippets. The procedure takes the following arguments:

Argument Name	Type	Optional?
<code>CONTEXT_HANDLE</code>	<code>RAW(16)</code>	N
<code>LANGUAGE_ID</code>	<code>VARCHAR2(64)</code>	N
<code>SOURCE</code>	<code>CLOB</code>	N
<code>RESULT</code>	<code>CLOB</code>	Y
<code>SOURCE_NAME</code>	<code>VARCHAR2</code>	Y

The argument `SOURCE_NAME` is optionally used to provide a name for the otherwise randomly-named JavaScript code block.

JavaScript code can be provided inline with PL/SQL as shown in the following code:

```
SET SERVEROUTPUT ON

DECLARE
    l_ctx DBMS_MLE.context_handle_t;
    l_jscode CLOB;
BEGIN
    l_ctx := DBMS_MLE.create_context;
    l_jscode := q'~
        console.log('Hello World, this is DBMS_MLE')
    ~';
    DBMS_MLE.eval(
        context_handle => l_ctx,
        language_id => 'JAVASCRIPT',
        source => l_jscode,
        source_name => 'My JS Snippet'
    );
END;
/
```

Executing this example will result in the following being printed:

```
Hello World, this is DBMS_MLE
```

The code provided above demonstrates the following concepts of invoking JavaScript code dynamically:

- An execution context must be explicitly created
- JavaScript code is provided as a Character Large Object (CLOB) or VARCHAR2 variable
- The context must be explicitly evaluated

Both PL/SQL and JavaScript are present when you execute JavaScript dynamically. The code snippets provided are not reusable outside of their namespace. The output of the call to `console.log` is passed to `DBMS_OUTPUT` for printing on the screen.

#### See Also:

- [Overview of Dynamic MLE Execution](#) for more details about dynamic execution with MLE
- [Returning the Result of the Last Execution](#) for more information about the `RESULT` argument of the procedure `DBMS_MLE.eval()`

## Introduction to MLE Module Calls

It is possible to create JavaScript modules as schema objects that are stored persistently in the database.

Once a JavaScript module has been defined, it can be used in SQL and PL/SQL as shown below:

```
CREATE OR REPLACE MLE MODULE helloWorld_module
LANGUAGE JAVASCRIPT AS
function helloWorld() {
    console.log('Hello World, this is a JS module');
}
export { helloWorld }
/
```

Before the exported JavaScript function can be invoked, a call specification must be defined. The code snippet below shows how to create a call specification for the JavaScript `helloWorld()` function in PL/SQL:

```
CREATE OR REPLACE PROCEDURE helloWorld_proc
AS MLE MODULE helloWorld_module
SIGNATURE 'helloWorld()';
/
```

The call specification, referred to as an MLE module call, publishes the JavaScript function `helloWorld()`. It can then be used just like any other PL/SQL procedure. The following snippet shows how to invoke the function along with the results:

```
SET SERVEROUTPUT ON

BEGIN
    helloWorld_proc;
END;
/
```

**Result:**

```
Hello World, this is a JS module
```

In addition to custom-built JavaScript modules as shown in the provided code, it is possible to load third-party JavaScript modules into the database. Note that Oracle recommends performing a security screening of third-party code according to industry best practice.

#### See Also:

- [MLE JavaScript Modules and Environments](#) for details about MLE modules and environments
- [MLE Security](#) for more information about MLE security features and recommendations

## About MLE Execution Contexts

An MLE execution context is a standalone, isolated runtime environment, designed to contain all runtime state associated with the execution of JavaScript code. Runtime state includes global variables as well as the state of the language environment.

### Note:

An MLE execution context corresponds to an [ECMAScript Execution Context](#) for JavaScript.

MLE uses execution contexts in two different scenarios:

- With dynamic MLE execution, where you can create and use dynamic MLE contexts explicitly
- For calls from SQL and PL/SQL to functions exported by an MLE module

### Dynamic Execution

Properties of dynamic MLE contexts are determined by the environment used at the moment the execution context is created. You have explicit control over which execution context is used for each dynamic MLE snippet, with each execution context running code on behalf of a single user.

There is no limit to how many dynamic MLE execution contexts can be created in a session, or how they are shared across different code snippets. Code snippets in JavaScript share all global variables with other code snippets running in the same execution context.

### MLE Modules

Contexts for MLE module calls from SQL or PL/SQL are created implicitly on demand. Here, the properties are determined by the MLE environment referenced in the call specification at the moment of context creation. The environment can be used to specify language options and to make MLE modules available for import.

MLE modules never share an execution context with other modules or dynamic MLE snippets. Additionally, separate execution contexts are used when code from the same MLE module is executed on behalf of different users. MLE creates a dedicated execution context for each combination of MLE module and environment. Two call specifications that specify either different modules or different environments are executed in separate module contexts.

### See Also:

- [Specifying Environments for MLE Modules](#) for more information about MLE environments
- [Execution Contexts](#) for information about how execution contexts are used to enforce runtime state isolation

## Introduction to Debugging JavaScript Code

MLE allows you to debug your JavaScript code by conveniently and efficiently collecting runtime state during program execution.

After your MLE code has finished executing, debug data collected can be used to analyze program behavior and discover and fix bugs. This form of debugging is known as post-execution debugging.

The post-execution debug option allows you to instrument your code with debugpoints. Debugpoints allow for the logging of program state conditionally or unconditionally, including values of individual variables as well as execution snapshots. Debugpoints are specified as JSON documents separate from the application code. No change to the application code is necessary for debugpoints to fire.

When activated, debug information is collected according to the debug specification and can be fetched for later analysis by a wide range of tools thanks to its standard format.



### See Also:

[Post-Execution Debugging of MLE JavaScript Modules](#) for more details about post-execution debugging with MLE

# 2

## MLE JavaScript Modules and Environments

A JavaScript module is a unit of MLE's language code stored in the database as a schema object.

Storing code within the database is one of the main benefits of using JavaScript in MLE: rather than having to manage a fleet of application servers each with their own copy of the application, the database takes care of this for you.

In addition, Data Guard replication ensures that the same code is present in both production and all physical standby databases. Configuration drift, a common problem bound to occur when invoking the disaster recovery location, can be mitigated against.

A JavaScript module in MLE is equivalent to an ECMAScript 6 module. The terms MLE module and JavaScript module are used interchangeably. The contents are specific to JavaScript and can be managed using Data Definition Language (DDL) commands.

In traditional JavaScript environments, additional information is often passed to the runtime using directives or configuration scripts. In MLE, this can be achieved using MLE environments, an additional metadata structure complementing MLE modules. MLE environments are also used for name resolution of JavaScript module imports. Name resolution is crucial for maintaining code and separating it into various modules to be used with MLE.



### See Also:

[Developer.mozilla.org](https://developer.mozilla.org) for more information about JavaScript modules

### Topics

- [Using JavaScript Modules in MLE](#)  
JavaScript modules can be used in several different ways and can be managed using a set of Data Definition Language (DDL) commands.
- [Specifying Environments for MLE Modules](#)  
MLE environments are schema objects in the database. Their functionality and management methods are described.

## Using JavaScript Modules in MLE

JavaScript modules can be used in several different ways and can be managed using a set of Data Definition Language (DDL) commands.

JavaScript code provided in MLE modules can be used in the following ways:

- JavaScript functions exported by an MLE modules can be published by creating a call specification known as an MLE module call. This allows the function to be called directly from SQL and PL/SQL.

- Functionality exported by a JavaScript MLE module can be imported in other MLE JavaScript modules.
- Code snippets in `DBMS_MLE` can import modules for dynamic invocation of JavaScript.

Before a user can create and execute MLE modules, several privileges must be granted.

 **See Also:**

- [Overview of Importing MLE JavaScript Modules](#) for more information about module calls
- [Overview of Dynamic MLE Execution](#) for more information about `DBMS_MLE` and dynamic invocation of JavaScript code in the database
- [System and Object Privileges Required for Working with JavaScript in MLE](#) for more information about MLE-specific privileges

### Topics

- [Managing JavaScript Modules in the Database](#)  
SQL allows the creation of MLE modules as schema objects, assuming the necessary privileges are in place.
- [Preparing JavaScript code for MLE Module Calls](#)  
JavaScript modules in MLE follow the ECMAScript 6 standard for modules. Functions and variables expected to be consumed by users of the MLE module must be exported.
- [Additional Options for Providing JavaScript Code to MLE](#)  
The JavaScript source code of an MLE module can be specified inline with PL/SQL but can also be provided using a BFILE, BLOB, or CLOB, in which case the source file must be UTF8 encoded.
- [Specifying Module Version Information and Providing JSON Metadata](#)  
MLE modules may carry optional metadata in the form of a version string and free-form JSON-valued metadata.
- [Drop JavaScript Modules](#)  
The `DROP MLE MODULE` DDL statement is used for dropping an MLE module.
- [Alter JavaScript Modules](#)  
Attributes of an MLE module can be assigned or altered using the `ALTER MLE MODULE` statement.
- [Overview of Built-in JavaScript Modules](#)  
MLE provides a set of built-in JavaScript modules that are available for import in any execution context.
- [Dictionary Views Related to MLE JavaScript Modules](#)  
The Data Dictionary includes details about JavaScript modules.

## Managing JavaScript Modules in the Database

SQL allows the creation of MLE modules as schema objects, assuming the necessary privileges are in place.

At a minimum, you need the `CREATE MLE MODULE` privilege to create or replace an MLE module in your own schema. Additionally, you must have the execute privilege on the target JavaScript language object.

### See Also:

- [System and Object Privileges Required for Working with JavaScript in MLE](#) for more information about MLE-specific privileges
- *Oracle Database Security Guide* for more details about privileges and roles in Oracle Database

### Topics

- [Naming JavaScript Modules](#)  
Each JavaScript module name must be unique in the schema that it is created in. Unless a fully qualified name is used, the current user's schema is used.
- [Creating JavaScript Modules in the Database](#)  
JavaScript modules are created in the database using the `CREATE MLE MODULE DDL` statement, specifying name and source code of the MLE module.
- [Storing JavaScript Code in Databases Using Single-Byte Character Sets](#)  
Character set standards and things to remember when using a single-byte character set with MLE.
- [Code Analysis](#)  
MLE does not perform any checks on JavaScript code for correctness or coding best practice. Thus, developers should use their linting tool of choice to perform analysis before executing the `CREATE MLE MODULE` command.

## Naming JavaScript Modules

Each JavaScript module name must be unique in the schema that it is created in. Unless a fully qualified name is used, the current user's schema is used.

As with other schema object identifiers, the module name is case-sensitive if enclosed in double quotation marks. If the enclosing quotation marks are omitted, the name is implicitly converted to uppercase.

When choosing a unique name, note that MLE objects share the namespace with tables, views, materialized views, sequences, private synonyms, PL/SQL packages, functions, procedures, and cache groups.



## Creating JavaScript Modules in the Database

JavaScript modules are created in the database using the `CREATE MLE MODULE DDL` statement, specifying name and source code of the MLE module.

As soon as an MLE module has been created, it is persisted in the database dictionary. This is one of the differences when compared to dynamic execution of JavaScript code using `DBMS_MLE`.

`CREATE MLE MODULE` (without the `OR REPLACE` clause) throws an error if an MLE module with the given name already exists. With `CREATE OR REPLACE MLE MODULE`, the existing module is replaced if it exists, otherwise a new one is created. When an MLE module is replaced, privileges to it do not need to be re-granted.

For those who are familiar with PL/SQL, note that this is exactly the same behavior experienced with PL/SQL program units.

If you do not wish to replace an existing module in the event the module name is already in use, you can use the `IF NOT EXISTS` clause rather than `CREATE OR REPLACE`. The syntax for this variation is shown in [Example 2-1](#). The `IF NOT EXISTS` and `OR REPLACE` clauses are mutually exclusive.



### See Also:

*Oracle Database Development Guide* for more information about using the `IF [NOT] EXISTS` syntax

### Example 2-1 Creating a JavaScript Module in the Database

This example demonstrates the creation of an MLE module and the export of a simple JavaScript function.

```
CREATE MLE MODULE IF NOT EXISTS po_module LANGUAGE JAVASCRIPT AS

/**
 * get the value of all line items in an order
 * @param {array} lineItems - all the line items in a purchase order
 * @returns {number} the total value of all line items in a purchase
order
 */
export function orderValue(lineItems) {

    return lineItems
        .map( x => x.Part.UnitPrice * x.Quantity )
        .reduce(
            (accumulator, currentValue) => accumulator + currentValue,
            0
        );
}
/
```

The first line of this code block specifies the JavaScript module name as `po_module`. The remaining lines define the actual JavaScript code. Note that in line with the ECMAScript standard, the `export` keyword indicates the function to be exported to potential callers of the module. MLE accepts code adhering to the ECMAScript 2022 standard.

## Storing JavaScript Code in Databases Using Single-Byte Character Sets

Character set standards and things to remember when using a single-byte character set with MLE.

JavaScript is encoded in Unicode. The Unicode Standard is a character encoding system that defines every character in most of the spoken languages in the world. It was developed to overcome limitations of other character-set encodings.

Oracle recommends creating databases using the AL32UTF8 character set. Using the AL32UTF8 character set in the database ensures the use of the latest version of the Unicode Standards and minimizes the potential for character-set conversion errors.

In case your database still uses a single-byte character set such as US7ASCII, WE8ISO8859-n, or WE8MSWIN1252, you must be careful not to use Unicode features in MLE JavaScript code. This is no different than handling other types of input data with such a database.



### See Also:

*Oracle Database Globalization Support Guide* for more details about the Unicode Standard

## Code Analysis

MLE does not perform any checks on JavaScript code for correctness or coding best practice. Thus, developers should use their linting tool of choice to perform analysis before executing the `CREATE MLE MODULE` command.

When creating MLE modules in the database, you should use a well-established toolchain in the same way other JavaScript projects are governed. In this sense, the call to `CREATE MLE MODULE` can be considered a deployment step, similar to deploying a server application. Code checking should be performed during a build step, for example by a continuous integration and continuous deployment (CI/CD) pipeline, prior to deployment.

It is considered an industry best practice to process code with a tool called a *linter* before checking it into a source-code repository. As with any other development project, you are free to choose the best option for yourself and your team. Some potential options include ESLint, JSHint, JSLint, and others that perform static code analysis to flag syntax errors, bugs, or otherwise problematic code. They can also be used to enforce a certain coding style. Many integrated development environments (IDEs) provide linting as a built-in feature, invoking the tool as soon as a file is saved to disk and flagging any issues.

In addition to executing linting dynamically, it is possible to automate the code analysis using highly automated DevOps environments to invoke linting as part of a build pipeline. This step usually occurs prior to submitting the JavaScript module to the database.

The aim is to trap as many potential issues as possible before they can produce problems at runtime. Unit tests can help further mitigate these risks and their inclusion into the development process have become an industry best practice. Regardless of the method you choose, the code analysis step occurs prior to submitting the JavaScript module to the database.

## Preparing JavaScript code for MLE Module Calls

JavaScript modules in MLE follow the ECMAScript 6 standard for modules. Functions and variables expected to be consumed by users of the MLE module must be exported.

Those variables and functions *not* exported are considered private in the module. [Example 2-3](#) demonstrates the use of both public and private functions in an MLE JavaScript module.

An ECMAScript module can import other ECMAScript modules using import statements or dynamic import calls. This functionality is present in MLE as well. Complementary metadata to MLE modules is provided in MLE environments.

Note that console output in MLE is facilitated using the console object. By default, anything written to `console.log()` is routed to `DBMS_OUTPUT` and will end up on the screen.

JavaScript code like that in [Example 2-1](#) cannot be accessed from SQL or PL/SQL without the help of call specifications. For now, you can think of a call specification as a PL/SQL program unit (function, procedure, or package) where its PL/SQL body is replaced with a reference to the JavaScript module and function, as shown in [Example 2-2](#). For more information about call specifications, see [MLE JavaScript Functions](#).



### See Also:

[Using MLE Environments for Import Resolution](#)

### Example 2-2 Create a Call Specification for a Public Function

This example uses the module `po_module` created in [Example 2-1](#). A call specification for `orderValue()`, the only function exported in `po_module`, can be written as follows:

```
CREATE OR REPLACE FUNCTION order_value(  
    p_line_items JSON  
) RETURN NUMBER AS  
MLE MODULE po_module  
SIGNATURE 'orderValue';  
/
```

Once the function is created, it is possible to calculate the value of a given purchase order:

```
SELECT
```

```

    po.po_document.PONumber,
    order_value(po.po_document.LineItems[*]) order_value
FROM
    j_purchaseorder po;

```

**Result:**

PONUMBER	ORDER_VALUE
1600	279.3
672	359.5

### Example 2-3 Public and Private Functions in a JavaScript Module

In addition to public (exported) functions, it is possible to add functions private to the module. In this example, the calculation of the value is taken out of the `map()` function and moved to a separate function (refactoring).

The first function in the following code, `lineItemValue()`, is considered private, whereas the second function, `orderValue()`, is public. The `export` keyword is provided at the end of this code listing but can also appear as a prefix for variables and functions, as seen in [Example 2-1](#). Both variations are valid JavaScript syntax.

```

CREATE OR REPLACE MLE MODULE po_module LANGUAGE JAVASCRIPT AS

/**
 * calculate the value of a given line item. Factored out of the public
 * function to allow for currency conversions in a later step
 * @param {number} unitPrice - the price of a single article
 * @param {number} quantity - the quantity of articles ordered
 * @returns {number} the monetary value of the line item
 */
function lineItemValue(unitPrice, quantity) {
    return unitPrice * quantity;
}

/**
 * get the value of all line items in an order
 * @param {array} lineItems - all the line items in a purchase order
 * @returns {number} the total value of all line items in a purchase order
 */
function orderValue(lineItems) {

    return lineItems
        .map( x => lineItemValue(x.Part.UnitPrice, x.Quantity) )
        .reduce(
            (accumulator, currentValue) => accumulator +
currentValue, 0
        );
}

```

```
export { orderValue }
/
```

## Additional Options for Providing JavaScript Code to MLE

The JavaScript source code of an MLE module can be specified inline with PL/SQL but can also be provided using a BFILE, BLOB, or CLOB, in which case the source file must be UTF8 encoded.

Creating MLE modules using the BFILE clause can cause problems with logical replication such as GoldenGate. In order for the DDL command to succeed on the target database, the same directory must exist on the target database. Furthermore, the same JavaScript file must be present in this directory. Failure to adhere to these conditions will cause the call to create the MLE module on the target database to fail.

A BLOB or a CLOB can also be used to create an MLE module as an alternative to using a BFILE. [Example 2-5](#) shows how to create a JavaScript module using a CLOB. If you prefer to use a BLOB, the syntax is the same but the value of the BLOB will differ from that of a CLOB.

### Example 2-4 Providing JavaScript Source Code Using a BFILE

In this example, `JS_SRC_DIR` is a database directory object mapping to a location on the local file system containing the module's source code in a file called `myJavaScriptModule.js`. When loading the file from the directory location, MLE stores the source code in the dictionary. Subsequent calls to the MLE module will not cause the source code to be refreshed from the disk. If there is a new version of the module stored in `myJavaScriptModule.js`, it must be deployed using another call to `CREATE OR REPLACE MLE MODULE`.

```
CREATE MLE MODULE mod_from_bfile
LANGUAGE JAVASCRIPT
USING BFILE(JS_SRC_DIR, 'myJavaScriptModule.js');
/
```

### Example 2-5 Providing JavaScript Source Code Using a CLOB

```
CREATE OR REPLACE MLE MODULE mod_from_clob_inline
LANGUAGE JAVASCRIPT USING CLOB (
  SELECT q'~
  export function clob_hello(who){
    return `hello, ${who}`;
  }
  ~')
/
```

As an alternative, you also have the option of using JavaScript source code that is stored in a table. This example variation assumes your schema features a table named `javascript_src` containing the JavaScript source code in column `src` along with some additional metadata. The following statement fetches the CLOB and creates the module.

```
CREATE OR REPLACE MLE MODULE mod_from_clob_table
LANGUAGE JAVASCRIPT USING CLOB (
```

```
SELECT src
FROM javascript_src
WHERE
    id = 1 AND
    commit_hash = 'ac1fd40'
)
/
```

Staging tables like this can be found in environments where Continuous Integration (CI) pipelines are used to deploy JavaScript code to the database.

## Specifying Module Version Information and Providing JSON Metadata

MLE modules may carry optional metadata in the form of a version string and free-form JSON-valued metadata.

Both kinds of metadata are purely informational and do not influence the behavior of MLE. They are stored alongside the module in the data dictionary.

The `VERSION` flag can be used as an internal reminder about what version of the code is deployed. The information stored in the `VERSION` field allows developers and administrators to identify the code in the version control system.

The format for JSON metadata is not bound to a schema; anything useful or informative can be added by the developer. In case the MLE module is an aggregation of sources created by a tool such as `rollup.js` or `webpack`, it can be useful to store the associated `package-lock.json` file alongside the module.

The metadata field can be used to create a software bill of material (SBOM), allowing security teams and administrators to track information about deployed packages, especially in the case where third-party modules are used.

Tracking dependencies and vulnerabilities in the upstream repository supports easier identification of components in need of update after security vulnerabilities have been reported.

### See Also:

- [Dictionary Views Related to MLE JavaScript Modules](#)
- [Software Bill of Material](#) for more information about using the metadata field to store a SBOM

### Example 2-6 Specification of a `VERSION` string in `CREATE MLE MODULE`

```
CREATE OR REPLACE MLE MODULE version_mod
LANGUAGE JAVASCRIPT
VERSION '1.0.0.1.0'
AS
export function sq(num) {
    return num * num;
```

```
}  
/
```

### Example 2-7 Addition of JSON Metadata to the MLE Module

This example uses the module `version_mod`, created in [Example 2-6](#).

```
ALTER MLE MODULE version_mod  
SET METADATA USING CLOB  
(SELECT  
  '{  
    "name": "devel",  
    "lockfileVersion": 2,  
    "requires": true,  
    "packages": {}  
  }'  
)  
/
```

## Drop JavaScript Modules

The `DROP MLE MODULE` DDL statement is used for dropping an MLE module.

The `DROP` statement specifies the name, and optionally the schema of the module to be dropped. If a schema is not specified, the schema of the current user is assumed.

Attempting to drop an MLE module that does not exist causes an error to be thrown. In cases where this is not desirable, the `IF EXISTS` clause can be used. The `DROP MLE MODULE` command is silently skipped if the indicated MLE module does not exist.

### Example 2-8 Drop an MLE Module

```
DROP MLE MODULE unused_mod;
```

### Example 2-9 Drop an MLE Module Using IF EXISTS

```
DROP MLE MODULE IF EXISTS unused_mod;
```

## Alter JavaScript Modules

Attributes of an MLE module can be assigned or altered using the `ALTER MLE MODULE` statement.

The `ALTER MLE MODULE` statement specifies the name, and optionally the schema of the module to be altered. If the module name is not prefixed with a schema, the schema of the current user is assumed.

### Example 2-10 Alter an MLE Module

```
ALTER MLE MODULE change_mod  
SET METADATA USING CLOB(SELECT'{...}');
```

## Overview of Built-in JavaScript Modules

MLE provides a set of built-in JavaScript modules that are available for import in any execution context.

Built-in modules are not deployed to the database as user-defined MLE modules, but are included as part of the MLE runtime. In particular, MLE provides the following three built-in JavaScript modules:

- `mle-js-oracledb` is the JavaScript MLE SQL Driver.
- `mle-js-bindings` provides functionality to import and export values from the PL/SQL engine.
- `mle-js-plsqltypes` provides definitions for the PL/SQL wrapper types. For example, JavaScript types that wrap PL/SQL and SQL types like `OracleNumber`.
- `mle-js-fetch` provides a partial Fetch API polyfill, allowing developers to invoke external resources.
- `mle-encode-base64` contains code to work with base64-encoded data.

These modules can be used to interact with the database and provide type conversions between the JavaScript engine and database engine.



### See Also:

[Server-Side JavaScript API Documentation](#) for more information about the built-in JavaScript modules

## Dictionary Views Related to MLE JavaScript Modules

The Data Dictionary includes details about JavaScript modules.

### Topics

- [USER\\_SOURCE](#)  
Each JavaScript module's source code is externalized using the `[USER | ALL | DBA | CDB]_SOURCE` dictionary views.
- [USER\\_MLE\\_MODULES](#)  
Metadata pertaining to JavaScript MLE modules are found in `[USER | ALL | DBA | CDB]_MLE_MODULES`.

## USER\_SOURCE

Each JavaScript module's source code is externalized using the `[USER | ALL | DBA | CDB]_SOURCE` dictionary views.

Modules created with references to the file system using the `BFILE` operator show the code at the time of the module's creation.

For more information about `*_SOURCE`, see *Oracle Database Reference*.



**Example 2-11 Externalize JavaScript Module Source Code**

```
SELECT
  line,
  text
FROM
  USER_SOURCE
WHERE
  name = 'PO_MODULE';
```

**Example output:**

```
LINE TEXT
-----
1 /**
2  * calculate the value of a given line item. Factored out of the
public
3  * function to allow for currency conversions in a later step
4  * @param {number} unitPrice - the price of a single article
5  * @param {number} quantity - the quantity of articles ordered
6  * @returns {number} the monetary value of the line item
7  */
8 function lineItemValue(unitPrice, quantity) {
9   return unitPrice * quantity;
10 }
11
12
13 /**
14  * get the value of all line items in an order
15  * @param {array} lineItems - all the line items in a purchase
order
16  * @returns {number} the total value of all line items in a
purchase order
17  */
18 export function orderValue(lineItems) {
19
20   return lineItems
21     .map( x => lineItemValue(x.Part.UnitPrice,
x.Quantity) )
22     .reduce(
23       (accumulator, currentValue) => accumulator +
currentValue, 0
24     );
25 }
```

## USER\_MLE\_MODULES

Metadata pertaining to JavaScript MLE modules are found in [USER | ALL | DBA | CDB]\_MLE\_MODULES.

Any JSON metadata specified, version information, as well as language, name, and owner can be found in this view.

For more information about `*_MLE_MODULES`, see *Oracle Database Reference*.

### Example 2-12 Find MLE Modules Defined in a Schema

```
SELECT MODULE_NAME, VERSION, METADATA
FROM USER_MLE_MODULES
WHERE LANGUAGE_NAME='JAVASCRIPT'
/
```

Example output:

MODULE_NAME	VERSION	METADATA
MY_MOD01	1.0.0.1	
MY_MOD02	1.0.1.1	
MY_MOD03		

## Specifying Environments for MLE Modules

MLE environments are schema objects in the database. Their functionality and management methods are described.

MLE environments complement MLE modules and allow you to do the following:

- Set language options to customize the JavaScript runtime in its execution context
- Enable specific MLE modules to be imported
- Manage name resolution and the import chain

### Topics

- [Creating MLE Environments in the Database](#)  
The SQL DDL supports the creation of MLE environments.
- [Dropping MLE Environments](#)  
MLE environments that are no longer needed can be dropping using the `DROP MLE ENV` command.
- [Modifying MLE Environments](#)  
Existing MLE environments can be modified using the `ALTER MLE ENV` command.
- [Dictionary Views Related to MLE JavaScript Environments](#)  
Details about MLE environments are available in these families of views: `USER_MLE_ENVS` and `USER_MLE_ENV_IMPORTS`.

## Creating MLE Environments in the Database

The SQL DDL supports the creation of MLE environments.

Just like MLE modules, MLE environments are schema objects in the database, persisted in the data dictionary.

At a minimum, you must have the `CREATE MLE MODULE` privilege to create or replace an MLE environment in your own schema.

 **See Also:**

- [System and Object Privileges Required for Working with JavaScript in MLE](#) for more information about the privileges necessary to create and execute JavaScript code in MLE
- *Oracle Database Security Guide* for details about privileges and roles in Oracle Database

### Topics

- [Naming MLE Environments](#)  
Each JavaScript environment's name must be unique in the schema it is created in. Unless a fully qualified name is used, the current user's schema is used.
- [Creating an Empty MLE Environment](#)  
The DDL statement `CREATE MLE ENV` can be used to create an MLE environment.
- [Creating an Environment as a Clone of an Existing Environment](#)  
If needed, a new environment can be created as a point-in-time copy of an existing environment.
- [Using MLE Environments for Import Resolution](#)  
It is possible to import functionality exported by one JavaScript module into another using the import statement.
- [Providing Language Options](#)  
MLE allows the customization of JavaScript's runtime by setting language-specific options in MLE environments.

## Naming MLE Environments

Each JavaScript environment's name must be unique in the schema it is created in. Unless a fully qualified name is used, the current user's schema is used.

As with other schema object identifiers, the name is case-sensitive if enclosed in double quotation marks. If the enclosing quotation marks are omitted, the name is implicitly converted to uppercase.

MLE environments cannot contain import mappings that conflict with the names of the MLE built-in modules (`mle-js-oracledb`, `mle-js-bindings`, `mle-js-plsqltypes`, `mle-js-fetch`, and `mle-encode-base64`). If you attempt to add such a mapping using either the `CREATE MLE ENV` or `ALTER MLE ENV DDL`, the operation fails with an error.

## Creating an Empty MLE Environment

The DDL statement `CREATE MLE ENV` can be used to create an MLE environment.

In its most basic form, an environment can be created empty as shown in the following snippet:

```
CREATE MLE ENV MyEnv
```

Subsequent calls to `ALTER MLE ENV` can be used to add properties to the environment.

Just like with MLE modules, it is possible to append the `OR REPLACE` clause to instruct the database to replace an existing MLE environment rather than throwing an error.

Furthermore, the `IF NOT EXISTS` clause can be used instead of the `OR REPLACE` clause to prevent the creation of a new MLE environment in the case that one already exists with the same name. In this case, the statement used to create the environment changes to the following:

```
CREATE MLE ENV IF NOT EXISTS MyEnv
```

 **Note:**

The `IF NOT EXISTS` and `OR REPLACE` clauses are mutually exclusive.

 **See Also:**

[Modifying MLE Environments](#) for information about editing existing environments

## Creating an Environment as a Clone of an Existing Environment

If needed, a new environment can be created as a point-in-time copy of an existing environment.

The new environment inherits all settings from its source. Subsequent changes to the source are not propagated to the clone. A clone can be created as shown in the following statement:

```
CREATE MLE ENV MyEnvDuplicate CLONE MyEnv
```

## Using MLE Environments for Import Resolution

It is possible to import functionality exported by one JavaScript module into another using the import statement.

The separation of code allows for finer control over changes and the ability to write more reusable code. Simplified code maintenance is another positive effect of this approach.

Only those identifiers marked with the `export` keyword are eligible for importing.

Modules attempting to import functionality from other modules stored in the database require MLE environments in order to perform name resolution. To create an MLE environment with that information, the `IMPORTS` clause must be used. [Example 2-13](#) demonstrates how a mapping is created between the identifier `po_module` and JavaScript module `PO_MODULE`, created in [Example 2-1](#).

Multiple imports can be provided as a comma-separated list. In [Example 2-13](#), the first parameter in single quotation marks is known as the import name. The import name is used by another module's import statement. In this case, `'po_module'` is the import name and refers to the module of the same name.

 **Note:**

The import name does not have to match the module name. Any valid JavaScript identifier can be used. The closer the import name matches the module name it refers to, the easier it is to identify the link between the two.

The `CREATE MLE ENV` command fails if a module referenced in the `IMPORTS` clause does not exist or is not accessible to you.

Built-in JavaScript modules can be imported directly without having to specify additional MLE environments.

 **See Also:**

[Overview of Built-in JavaScript Modules](#) for more information about built-in modules

**Example 2-13 Map Identifier to JavaScript Module**

```
CREATE OR REPLACE MLE ENV
  po_env
IMPORTS (
  'po_module' MODULE PO_MODULE
);
```

**Example 2-14 Import Module Functionality**

```
CREATE OR REPLACE MLE MODULE import_example_module
LANGUAGE JAVASCRIPT AS

import * as po from "po_module";
/**
 * use po_module's getValue() function to calculate the value of
 * a purchase order. In later chapters, when discussing the MLE
 * JavaScript SQL driver the hard-coded value used as the PO will
 * be replaced by calls to the database
 * @returns {number} the value of all line items in the purchase order
 */
export function purchaseOrderValue() {

  const purchaseOrder = {
    "PONumber": 1600,
    "Reference": "ABULL-20140421",
    "Requestor": "Alexis Bull",
    "User": "ABULL",
    "CostCenter": "A50",
    "ShippingInstructions": {
      "name": "Alexis Bull",
```

```

        "Address": {
            "street": "200 Sporting Green",
            "city": "South San Francisco",
            "state": "CA",
            "zipCode": 99236,
            "country": "United States of America"
        },
        "Phone": [
            {
                "type": "Office",
                "number": "909-555-7307"
            },
            {
                "type": "Mobile",
                "number": "415-555-1234"
            }
        ]
    },
    "Special Instructions": null,
    "AllowPartialShipment": true,
    "LineItems": [
        {
            "ItemNumber": 1,
            "Part": {
                "Description": "One Magic Christmas",
                "UnitPrice": 19.95,
                "UPCCode": 13131092899
            },
            "Quantity": 9.0
        },
        {
            "ItemNumber": 2,
            "Part": {
                "Description": "Lethal Weapon",
                "UnitPrice": 19.95,
                "UPCCode": 85391628927
            },
            "Quantity": 5.0
        }
    ]
};

return po.orderValue(purchaseOrder.LineItems);
}
/

purchaseOrderValue

CREATE FUNCTION purchase_order_value
RETURN NUMBER AS
MLE MODULE import_example_module
ENV po_env
SIGNATURE 'purchaseOrderValue';

```

```

/
SELECT purchase_order_value;
/

```

Result:

```

PURCHASE_ORDER_VALUE
-----
                279.3

```

## Providing Language Options

MLE allows the customization of JavaScript's runtime by setting language-specific options in MLE environments.

Any options specified in the MLE environment take precedence over the default settings.

Multiple language options can be provided as a comma-separated list of '<key>=<value>' strings. The following snippet demonstrates how to enforce JavaScript's strict mode.

```

CREATE MLE ENV MyEnvOpt
  LANGUAGE OPTIONS 'js.strict=true';

```

Changes made to the language options of an environment are not propagated to execution contexts that have already been created using the environment. For changes to take effect for existing contexts, the contexts need to be dropped and recreated.



### Note:

White space characters are not allowed between the key, equal sign, and value.

### Topics

- [JavaScript Language Options](#)  
A full list of JavaScript language options available to be used with MLE are included.

## JavaScript Language Options

A full list of JavaScript language options available to be used with MLE are included.

**Table 2-1 JavaScript Language Options**

Language Option	Accepted Value Type	Default	Description
js.strict	boolean	false	Enforce strict mode.

Table 2-1 (Cont.) JavaScript Language Options

Language Option	Accepted Value Type	Default	Description
js.console	boolean	true	Provide console global property.
js.polyglot-builtin	boolean	true	Provide Polyglot global property.

## Dropping MLE Environments

MLE environments that are no longer needed can be dropping using the `DROP MLE ENV` command.

The following snippet demonstrates a basic example of dropping an MLE module:

```
DROP MLE ENV myOldEnv;
```

As with MLE modules, the `IF EXISTS` clause prevents an error if the named MLE environment does not exist, as shown in the following snippet:

```
DROP MLE ENV IF EXISTS myOldEnv;
```

## Modifying MLE Environments

Existing MLE environments can be modified using the `ALTER MLE ENV` command.

It is possible to modify language options and the imports clause.

### Topics

- [Altering Language Options](#)  
You can modify language options provided to an MLE module.
- [Modifying Module Imports](#)  
In the context of MLE module imports, the `ALTER MLE ENV` command allows you to add additional imports as well as modify and drop existing imports.

## Altering Language Options

You can modify language options provided to an MLE module.

Use the `ALTER MLE ENV` clause to modify language options, as shown in the following snippet:

```
ALTER MLE ENV MyEnvOpt  
SET LANGUAGE OPTIONS 'js.strict=false';
```



## Modifying Module Imports

In the context of MLE module imports, the `ALTER MLE ENV` command allows you to add additional imports as well as modify and drop existing imports.

Imports not specified during an environment's creation can be added to existing MLE environments using the `ADD IMPORTS` clause. Import names, once defined, are static and must be dropped before they can be added as desired. Assuming you have run a new `CREATE MLE DDL` to replace `IMPORT_EXAMPLE_MODULE` from [Example 2-1](#) with the module name `IMPORT_EXAMPLE_MODULE_V2`, the following statement will run successfully:

```
ALTER MLE ENV po_env
ADD IMPORTS (
    'import_example' MODULE IMPORT_EXAMPLE_MODULE_V2
);
```

Any imports no longer needed can be dropped using the `DROP IMPORTS` clause:

```
ALTER MLE ENV po_env DROP IMPORTS('import_example');
```

The case of the import identifier must match that in the data dictionary's `USER_MLE_ENV_IMPORTS` view.

## Dictionary Views Related to MLE JavaScript Environments

Details about MLE environments are available in these families of views: `USER_MLE_ENVS` and `USER_MLE_ENV_IMPORTS`.

In addition to the `USER` prefix, these views exist in all namespaces: `CDB`, `DBA`, `ALL`, and `USER`.

### Topics

- [USER\\_MLE\\_ENVS](#)  
The `USER_MLE_ENVS` view lists all MLE environments available to you along with the defined language options.
- [USER\\_MLE\\_ENV\\_IMPORTS](#)  
The `[USER | ALL | DBA | CDB]_MLE_ENV_IMPORTS` family of views lists imported modules.

## USER\_MLE\_ENVS

The `USER_MLE_ENVS` view lists all MLE environments available to you along with the defined language options.

For more information about `*_MLE_ENVS`, see *Oracle Database Reference*.

**Example 2-15 List Available MLE Environments Using USER\_MLE\_ENVS**

```
SELECT ENV_NAME, LANGUAGE_OPTIONS
FROM USER_MLE_ENVS
WHERE ENV_NAME='MYENVOPT'
/
```

Example SQL\*Plus output:

ENV_OWNER	ENV_NAME	LANGUAGE_OPTIONS
JSDEV01	MYENVOPT	js.strict=true

## USER\_MLE\_ENV\_IMPORTS

The [USER | ALL | DBA | CDB]\_MLE\_ENV\_IMPORTS family of views lists imported modules.

MLE environments are the key enablers for resolving names of imported modules.

[Example 2-16](#) demonstrates a query against USER\_MLE\_ENV\_IMPORTS to list IMPORT\_NAME, MODULE\_OWNER, and MODULE\_NAME.

For more information about \*\_MLE\_ENV\_IMPORTS, see *Oracle Database Reference*

**Example 2-16 List Module Import Information Using USER\_MLE\_ENV\_IMPORTS**

```
SELECT IMPORT_NAME, MODULE_OWNER, MODULE_NAME
      FROM USER_MLE_ENV_IMPORTS
      WHERE ENV_NAME='MYFACTORIALENV';
/
```

SQL\*Plus output:

IMPORT_NAME	MODULE_OWNER	MODULE_NAME
FACTORIAL_MOD	DEVELOPER1	FACTORIAL_MOD

# 3

## Overview of Dynamic MLE Execution

Dynamic MLE execution allows developers to invoke JavaScript snippets via the `DBMS_MLE` package without storing the JavaScript code in the database.

As an alternative to executing JavaScript code using modules, MLE provides the option of dynamic execution. With dynamic execution, no JavaScript code is stored in the data dictionary. Instead, you can invoke snippets of JavaScript code via the `DBMS_MLE` package.

### See Also:

- [Server-Side JavaScript API Documentation](#) for information about built-in module `mle-js-bindings`, used to exchange values between PL/SQL and JavaScript
- *Oracle Database PL/SQL Packages and Types Reference* for more information about the `DBMS_MLE` package

### Topics

- [About Dynamic JavaScript Execution](#)  
Developers can run JavaScript dynamically either inline or by loading files via `DBMS_MLE`. Dynamic MLE execution provides an additional method for using JavaScript to interact with the Oracle Database, as an alternative to using MLE modules.
- [Dynamic Execution Workflow](#)  
The steps required to perform dynamic MLE execution are described.
- [Returning the Result of the Last Execution](#)  
Use the `result` argument to get the outcome of the last execution.

## About Dynamic JavaScript Execution

Developers can run JavaScript dynamically either inline or by loading files via `DBMS_MLE`. Dynamic MLE execution provides an additional method for using JavaScript to interact with the Oracle Database, as an alternative to using MLE modules.

The `DBMS_MLE` package allows users to execute JavaScript code inside the Oracle Database and seamlessly exchange data between PL/SQL and JavaScript. The JavaScript code itself can execute PL/SQL through built-in JavaScript modules. JavaScript data types are automatically mapped to Oracle Database data types and vice versa.

Developers can provide JavaScript code either as the value of a `VARCHAR2` variable or, in case of larger amounts of code, as a Character Large Object (CLOB). The JavaScript code is passed to the `DBMS_MLE` package where it is evaluated and executed.

Considering that `DBMS_MLE` is a PL/SQL package, there is mix of JavaScript and PL/SQL when dynamically executing code using `DBMS_MLE`, for example, in the following cases:

- Setup tasks such as providing the JavaScript code require an interaction with the PL/SQL layer.
- JavaScript code is executed by calling a function in `DBMS_MLE`.
- After JavaScript code completes execution, any errors that have been encountered are passed back to PL/SQL.

## Dynamic Execution Workflow

The steps required to perform dynamic MLE execution are described.

Before a user can create and execute JavaScript code using `DBMS_MLE`, several privileges must be granted. For information about required privileges, see [System and Object Privileges Required for Working with JavaScript in MLE](#).

The execution workflow for JavaScript code using `DBMS_MLE` is as follows:

1. Create an execution context
2. Provide JavaScript code either using a `VARCHAR2` or `CLOB` variable
3. Execute the code, optionally passing variables between the PL/SQL and MLE engines
4. Close the execution context

As with any code, it is considered an industry best practice to deal with unexpected conditions. You can do this in the JavaScript code itself using standard JavaScript exception handling features or in PL/SQL.

### Topics

- [Providing JavaScript Code Inline](#)  
Suggested method for providing JavaScript code inline by embedding it within a PL/SQL block.
- [Loading JavaScript Code from Files](#)  
The method for using a `BFILE` operator to read in a `CLOB` is described.

## Providing JavaScript Code Inline

Suggested method for providing JavaScript code inline by embedding it within a PL/SQL block.

One option to load JavaScript code is to use a quoting operator, commonly referred to as the q-quote operator. The use of this alternative quoting operator is suggested as the preferred method to provide JavaScript code inline with PL/SQL code whenever possible.

### Example 3-1 Using the Q-Quote Operator to Provide JavaScript Code Inline with PL/SQL

```
DECLARE
    l_ctx      dbms_mle.context_handle_t;
    l_snippet CLOB;
BEGIN
    l_ctx := dbms_mle.create_context();
    l_snippet := q'~
```

```

// the q-quote operator allows for much more readable code
console.log(`The use of the q-quote operator`);
console.log(`greatly simplifies provision of code inline`);
~';
    dbms_mle.eval(l_ctx, 'JAVASCRIPT', l_snippet);
    dbms_mle.drop_context(l_ctx);
EXCEPTION
    WHEN OTHERS THEN
        dbms_mle.drop_context(l_ctx);
        RAISE;
END;
/

```

**Result:**

The use of the q-quote operator greatly simplifies provision of code inline

## Loading JavaScript Code from Files

The method for using a `BFILE` operator to read in a CLOB is described.

If you plan to use a linter to conduct code analysis, providing JavaScript code in line with PL/SQL may not be your best option for dynamic execution. Another method for providing JavaScript code is to read a CLOB by means of a `BFILE` operator. This way PL/SQL and JavaScript code can be cleanly separated.

**See Also:**

*Oracle Database SecureFiles and Large Objects Developer's Guide* for information about Large Objects

### Example 3-2 Loading JavaScript code from a BFILE with `DBMS_LOB.LOADCLOBFROMFILE()`

This example illustrates the use of a `BFILE` and `DBMS_LOB.LOADCLOBFROMFILE()`.

The example assumes that you have read access to a directory named `SRC_CODE_DIR`. The source code file `hello_source.js` resides in that directory. Its contents are as follows:

```

console.log('hello from hello_source');

DECLARE
    l_ctx          dbms_mle.context_handle_t;
    l_js           CLOB;
    l_srcode_file  BFILE;
    l_dest_offset  INTEGER := 1;
    l_src_offset   INTEGER := 1;
    l_csid         INTEGER := dbms_lob.default_csid;
    l_lang_context INTEGER := dbms_lob.default_lang_ctx;

```

```
l_warn          INTEGER := 0;
BEGIN
  l_ctx := dbms_mle.create_context();

  dbms_lob.createtemporary(lob_loc => l_js, cache => false);

  l_srcode_file := bfilename('SRC_CODE_DIR', 'hello_source.js');

  IF ( dbms_lob.fileexists(file_loc => l_srcode_file) = 1 ) THEN
    dbms_lob.fileopen(file_loc => l_srcode_file);
    dbms_lob.loadclobfromfile(
      dest_lob      => l_js,
      src_bfile     => l_srcode_file,
      amount        => dbms_lob.getlength(l_srcode_file),
      dest_offset   => l_dest_offset,
      src_offset    => l_src_offset,
      bfile_csid    => l_csid,
      lang_context  => l_lang_context,
      warning       => l_warn
    );
    IF l_warn = dbms_lob.warn_inconvertible_char THEN
      raise_application_error(
        -20001,
        'the input file contained inconvertible characters'
      );
    END IF;

    dbms_lob.fileclose(l_srcode_file);
    dbms_mle.eval(
      context_handle => l_ctx,
      language_id    => 'JAVASCRIPT',
      source         => l_js
    );

    dbms_mle.drop_context(l_ctx);
  ELSE
    raise_application_error(
      -20001,
      'The input file does not exist'
    );
  END IF;

EXCEPTION
  WHEN OTHERS THEN
    dbms_mle.drop_context(l_ctx);
    RAISE;
END;
/
```

**Result:**

hello from hello\_source

In some cases, you may need to mix dynamic MLE execution as shown in with MLE modules persisted in the database, as shown in [Example 3-3](#).

### Example 3-3 Loading JavaScript Code from a BFILE by Referencing an MLE Module from DBMS\_MLE

The code for the JavaScript module is again stored in a file, as seen in [Example 3-2](#). The example assumes that you have read access to a directory named `SRC_CODE_DIR` and the file name is `greeting_source.js`:

```
export function greeting(){
    return 'hello from greeting_source';
}
```

This example begins by creating an MLE module from `BFILE` using the contents of the preceding file. Before the module can be used by `DBMS_MLE`, an environment must be created first, allowing the dynamic portion of the JavaScript code to reference the module.

Dynamic MLE execution does not allow the use of the ECMAScript `import` keyword. MLE modules must instead be dynamically imported using the `async/await` interface shown in this example.

```
CREATE OR REPLACE MLE MODULE greet_mod
LANGUAGE JAVASCRIPT
USING BFILE(SRC_CODE_DIR, 'greeting_source.js');
/

CREATE OR REPLACE MLE ENV greet_mod_env
imports ('greet_mod' module greet_mod);

DECLARE
    l_ctx      dbms_mle.context_handle_t;
    l_snippet  CLOB;
BEGIN
    l_ctx := dbms_mle.create_context(
        environment => 'GREET_MOD_ENV'
    );
    l_snippet := q'~
(async () => {
    let { greeting } = await import('greet_mod');
    const message = greeting();
    console.log(message);
})();
~';
    dbms_mle.eval(
        l_ctx,
        'JAVASCRIPT',
        l_snippet
    );
    dbms_mle.drop_context(l_ctx);
EXCEPTION
    WHEN OTHERS THEN
        dbms_mle.drop_context(l_ctx);
        RAISE;
```

```
END;
/
```

**Result:**

```
hello from greeting_source
```

**See Also:**

[Additional Options for Providing JavaScript Code to MLE](#) for information about using `BFILES` with MLE modules to load JavaScript code

## Returning the Result of the Last Execution

Use the `result` argument to get the outcome of the last execution.

A variant of the `DBMS_MLE.eval()` procedure takes an additional CLOB argument, `result`. Such a call to `DBMS_MLE.eval()` appends the outcome of the execution of the last statement in the provided dynamic MLE snippet to the CLOB provided as the `result` parameter.

This option is useful in the implementation of an interactive application, such as a Read-Eval-Print-Loop (REPL) server, to mimic the behavior of a similar REPL session in Node.js.

### Example 3-4 Returning the Result of the Last Execution

```
DECLARE
    l_ctx      dbms_mle.context_handle_t;
    l_snippet CLOB;
    l_result  CLOB;
BEGIN
    dbms_lob.createtemporary(
        lob_loc => l_result,
        cache   => false,
        dur     => dbms_lob.session
    );

    l_ctx := dbms_mle.create_context();
    l_snippet := q'~
let i = 21;
i *= 2;
~';
    dbms_mle.eval(
        context_handle => l_ctx,
        language_id    => 'JAVASCRIPT',
        source          => l_snippet,
        result          => l_result
    );
```



```
        dbms_output.put_line('result: ' || l_result);  
        dbms_mle.drop_context(l_ctx);  
EXCEPTION  
    WHEN OTHERS THEN  
        dbms_mle.drop_context(l_ctx);  
        RAISE;  
END;  
/
```

**Result:**

```
result: 42
```

# 4

## Overview of Importing MLE JavaScript Modules

One of the key benefits of MLE is the ability to store modules of JavaScript code in the Oracle Database. The availability of modules supports self-contained and reusable code, key to developing successful software projects.

MLE modules interact with each other through imports and exports. Specifically, if a module wants to use a functionality provided by another module, the source module must be exported and then imported into the calling module's scope.

Due to a difference in architecture, module imports behave slightly differently in the Oracle Database when compared to other development environments. For example, JavaScript source code used with Node.js is stored in a specific directory structure on disk. Alternatively, MLE modules are stored together with the database, rather than in a file system, so must be referenced in a different manner.

There are two options available for module imports in MLE:

- Importing module functionality into another module
- Importing module functionality into a code snippet to be executed via dynamic MLE (using the `DBMS_MLE` PL/SQL package)

### Note:

MLE supports a pure JavaScript implementation. Module exports and imports are facilitated as ECMAScript modules using the `export` and `import` keywords. Other JavaScript modularization technologies such as CommonJS and Asynchronous Module Definition (AMD) are not available.

### See Also:

[MLE JavaScript Modules and Environments](#) for more information on MLE modules

### Topics

- [JavaScript Module Hierarchies](#)  
The use of import names as opposed to file-system location to resolve to MLE modules is described.
- [Export Functionality](#)  
Commonly exported identifiers in native JavaScript modules include variables, constants, functions, and classes.

- **Import Functionality**  
The `import` keyword allows developers to import functionality that has been exported by a source module.

## JavaScript Module Hierarchies

The use of import names as opposed to file-system location to resolve to MLE modules is described.

A typical Node.js or browser-based workflow requires a module import to be followed by its location in the file system. For example, the following line is a valid module import statement in Node.js:

```
import * as myMath from './myMath.mjs'
```

Used with Node.js, this statement would import `myMath`'s contents into the current scope.

However, because MLE JavaScript modules are stored in the database, there are no file-system paths to be used for identification. Rather, MLE uses import names instead that resolve to the desired module.



### Note:

As soon as a module import is detected by the JavaScript runtime engine, `strict mode` is enforced.

### Topics

- **Resolving Import Names Using MLE Environments**  
Rather than file-system locations, MLE uses so-called import names instead. Import names must be valid JavaScript identifiers, but otherwise can be chosen freely.

## Resolving Import Names Using MLE Environments

Rather than file-system locations, MLE uses so-called import names instead. Import names must be valid JavaScript identifiers, but otherwise can be chosen freely.

### Example 4-1 Use an MLE Environment to Map an Import Name to a Module

This example shows how you might use an import name for code referencing functionality in module `named_exports_module`, which is defined in [Example 4-2](#).

MLE in Oracle Database requires a link between the import name, `namedExports`, and the corresponding MLE module, `named_exports_module`, at runtime. Just as with import names, you can choose any valid name for the MLE environment. A potential mapping is shown in the following snippet. See [Example 4-6](#) for a complete definition of module `mod_object_import_mod`.

```
CREATE OR REPLACE MLE ENV named_exports_env  
  imports ('namedExports' MODULE named_exports_module);  
/
```

```
CREATE OR REPLACE MLE MODULE mod_object_import_mod LANGUAGE JAVASCRIPT AS

import * as myMath from "namedExports";

function mySum() {...}
/
```

## Export Functionality

Commonly exported identifiers in native JavaScript modules include variables, constants, functions, and classes.

### Topics

- [Named Exports](#)  
The explicit use of identifiers in an export statement is referred to as using named exports in JavaScript.
- [Default Exports](#)  
As an alternative to named exports, a default export can be defined in JavaScript. A default export differs syntactically from a named export. Contrary to the latter, a default export does not require a set of curly brackets.
- [Private Identifiers](#)  
Any identifier not exported from a module is considered private and cannot be referenced outside the module's scope or in module call specifications.

## Named Exports

The explicit use of identifiers in an export statement is referred to as using named exports in JavaScript.

[Example 4-2](#) demonstrates the export of multiple functions using named exports.

### Example 4-2 Function Export using Named Exports

This code snippet creates a module called `named_exports_module`, defines two functions, `sum()` and `difference()`, and then uses a named export to provide access for other modules to import the listed functions.

```
CREATE OR REPLACE MLE MODULE named_exports_module LANGUAGE JAVASCRIPT AS

function sum(a, b) {
    return a + b;
}

function difference(a, b) {
    return a - b;
}

export {sum, difference};
/
```

Make note of the `export{}` statement at the end of the module. Named exports require the use of curly brackets when listing identifiers. Any identifier placed between the curly brackets is exported. Those not listed are not exported.

Rather than using the `export` statement towards the end of the module, it is also possible to prefix an identifier with the `export` keyword inline. The following example shows how the same module from the previous example can be rewritten with the `export` keyword provided inline with the JavaScript code.

### Example 4-3 Function Export Using Export Keyword Inline

This code snippet creates a module called `inline_export_module` and defines two functions, `sum()` and `difference()`, which are both prefaced with the `export` keyword inline.

```
CREATE OR REPLACE MLE MODULE inline_export_module LANGUAGE JAVASCRIPT
AS

export function sum(a, b) {
    return a + b;
}

export function difference(a, b) {
    return a - b;
}
/
```

Both `named_exports_module` from [Example 4-2](#) and `inline_export_module` are semantically identical. The method used to export the functions is the only syntactical difference.

## Default Exports

As an alternative to named exports, a default export can be defined in JavaScript. A default export differs syntactically from a named export. Contrary to the latter, a default export does not require a set of curly brackets.



#### Note:

In line with the ECMAScript standard, only one default export is possible per module.

### Example 4-4 Export a Class Using a Default Export

The following code snippet creates a module called `default_export_module`, defines a class called `myMath`, and defaults the class using a default export.

```
CREATE OR REPLACE MLE MODULE default_export_module
LANGUAGE JAVASCRIPT AS

export default class myMath {

    static sum(operand1, operand2) {
```

```
        return operand1 + operand2;
    }

    static difference(operand1, operand2) {
        return operand1 - operand2;
    }
}
/
```

## Private Identifiers

Any identifier not exported from a module is considered private and cannot be referenced outside the module's scope or in module call specifications.

### Example 4-5 Named Export of Single Function

The following code snippet creates a module called `private_export_module`, defines two functions, `sum()` and `difference()`, and exports the function `sum()` via named export. The function `difference()` is not included in the export statement, thus is only available within its own module's scope.

```
CREATE OR REPLACE MLE MODULE private_export_module
LANGUAGE JAVASCRIPT AS

function sum(a, b) {
    return a + b;
}

function difference(a, b) {
    return a - b;
}

export { sum };
/
```

## Import Functionality

The `import` keyword allows developers to import functionality that has been exported by a source module.

### Topics

- [Module Objects](#)  
A module object supplies a convenient way to import everything that has been exported by a module.
- [Named Imports](#)  
The ECMAScript standard specifies named imports. Rather than using an import name, you also have the option to specify identifiers.
- [Default Imports](#)  
Unlike named imports, default imports don't require the use of curly braces. This syntactical difference is also relevant to MLE's built-in modules.

## Module Objects

A module object supplies a convenient way to import everything that has been exported by a module.

The module object provides a means to access all identifiers exported by a module and is used as a kind of namespace when referring to the imports.

### Example 4-6 Module Object Definition

```
CREATE MLE ENV named_exports_env
  IMPORTS('namedExports' module named_exports_module);

CREATE OR REPLACE MLE MODULE mod_object_import_mod
LANGUAGE JAVASCRIPT AS

//the definition of a module object is demonstrated by the next line
import * as myMath from "namedExports"

function mySum(){
  const result = myMath.sum(4, 2);
  console.log(`the sum of 4 and 2 is ${result}`);
}

function myDifference(){
  const result = myMath.difference(4, 2);
  console.log(`the difference between 4 and 2 is ${result}`);
}

export {mySum, myDifference};
/
```

`myMath` identifies the module object and `named_exports_module` is the module name. Both `sum()` and `difference()` are available under the `myMath` scope in `mod_object_import_mod`.

## Named Imports

The ECMAScript standard specifies named imports. Rather than using an import name, you also have the option to specify identifiers.

### Example 4-7 Named Imports Using Specified Identifiers

```
CREATE OR REPLACE MLE MODULE named_imports_module
LANGUAGE JAVASCRIPT AS

import {sum, difference} from "namedExports";

function mySum(){
  const result = sum(4, 2);
  console.log(`the sum of 4 and 2 is ${result}`);
}
```

```
function myDifference(){
    const result = difference(4, 2);
    console.log(`the difference between 4 and 2 is ${result}`);
}

export {mySum, myDifference};
/
```

Namespace clashes can ensue if multiple modules export the same identifier. To avoid this issue, you can provide an alias in the `import` statement.

#### Example 4-8 Named Imports with Aliases

```
CREATE OR REPLACE MLE MODULE named_imports_alias_module
LANGUAGE JAVASCRIPT AS

//note the use of aliases in the next line
import {sum as theSum, difference as theDifference} from "namedExports";

function mySum(){
    const result = theSum(4, 2);
    console.log(`the sum of 4 and 2 is ${result}`);
}

function myDifference(){
    const result = theDifference(4, 2);
    console.log(`the difference between 4 and 2 is ${result}`);
}

export {mySum, myDifference};
/
```

Instead of referencing the exported functions by their original names, the alias is used instead.

## Default Imports

Unlike named imports, default imports don't require the use of curly braces. This syntactical difference is also relevant to MLE's built-in modules.

#### Example 4-9 Default Import

This example demonstrates the default import of `myMathClass`.

```
CREATE OR REPLACE MLE ENV default_export_env
IMPORTS('defaultExportModule' MODULE default_export_module);

CREATE MLE MODULE default_import_module LANGUAGE JAVASCRIPT AS

//note the lack of curly braces in the next line
import myMathClass from "defaultExportModule";

export function mySum(){
    const result = myMathClass.sum(4, 2);
}
```



```
    console.log(`the sum of 4 and 2 is ${result}`);  
  }  
  /
```

The same technique applies to the use of MLE's built-in modules such as the SQL driver. [Example 4-10](#) demonstrates the use of the SQL driver in JavaScript code.

#### Example 4-10 Default Import with Built-in Module

```
CREATE MLE MODULE default_import_built_in_mod  
LANGUAGE JAVASCRIPT AS  
  
//note that there is no need to use MLE environments with built-in  
modules  
import oracledb from "mle-js-oracledb";  
  
export function hello(){  
  const options = {  
    resultSet: false,  
    outFormat: oracledb.OUT_FORMAT_OBJECT  
  };  
  const bindvars = [];  
  
  const conn = oracledb.defaultConnection();  
  const result = conn.execute('select user', bindvars, options);  
  console.log(`hello, ${result.rows[0].USER}`);  
}  
/
```

Unlike other examples using custom JavaScript modules, no MLE environment is required for importing a built-in module.



#### See Also:

[Server-Side JavaScript API Documentation](#) for more information about the built-in JavaScript modules

# 5

## MLE JavaScript Functions

This chapter introduces the use of call specifications to publish JavaScript functions so that they can be called from SQL and PL/SQL. MLE's support of `OUT` and `IN OUT` parameters is also discussed.

### Topics

- [Call Specifications for Functions](#)  
Call specifications for modules and inlined MLE call specifications allow you to implement JavaScript functionality.
- [OUT and IN OUT Parameters](#)

## Call Specifications for Functions

Call specifications for modules and inlined MLE call specifications allow you to implement JavaScript functionality.

Functions exported by an MLE JavaScript module can be published by creating call specifications. A JavaScript function published with a call specification can be called from anywhere a PL/SQL function or procedure can be called.

Alternatively, inlined MLE call specifications can be used to embed JavaScript code directly in the DDL. This option can be advantageous when you want to quickly implement a simple functionality using JavaScript.

### Topics

- [Creating a Call Specification for an MLE Module](#)  
MLE call specification creation uses the generic `CREATE FUNCTION RETURNS AS` or `CREATE PROCEDURE AS` syntax, followed by MLE specific syntax.
- [Creating an Inlined MLE Call Specification](#)  
Inlined MLE call specifications embed JavaScript code directly in the `CREATE FUNCTION` and `CREATE PROCEDURE` DDLs.
- [Choosing Inlined Versus Module MLE Call Specifications](#)  
Each option provides its own advantages and disadvantages depending on your use case.
- [Runtime Isolation for an MLE Call Specification](#)
- [Dictionary Views for Call Specifications](#)  
Metadata about JavaScript call specifications is available in the data dictionary using the `[USER | ALL | DBA | CDB]_MLE_PROCEDURES` views. The family of views maps call specifications (package, function, procedure) to JavaScript modules. This dictionary view is closely modeled after the `*_PROCEDURES` views.

## Creating a Call Specification for an MLE Module

MLE call specification creation uses the generic `CREATE FUNCTION RETURNS AS` or `CREATE PROCEDURE AS` syntax, followed by MLE specific syntax.

### Example 5-1 Creating MLE Call Specifications

This example walks you through the creation of an MLE module that exports two functions, and the creation of call specifications to publish those functions.

```
CREATE OR REPLACE MLE MODULE jsmodule
LANGUAGE JAVASCRIPT AS

    export function greet(str){
        console.log(`Hello, ${str}`);
    }
    export function concat(str1, str2){
        return str1 + str2;
    }
/
```

The MLE module `jsmodule` exports two functions. The function `greet()` takes an input string argument and prints a simple greeting, while the function `concat()` takes two strings as input and returns the concatenated string as the result.

Because `greet()` does not return a value, you must create a PL/SQL procedure to publish it, as follows:

```
CREATE OR REPLACE PROCEDURE
    GREET(str in VARCHAR2)
    AS MLE MODULE jsmodule
    SIGNATURE 'greet(string)';
/
```

The above call specification creates a PL/SQL procedure named `GREET()` in the schema of the current user. Running the procedure executes the exported function `greet()` in the JavaScript module `jsmodule`.

Note that it is not a requirement that the call specification has the same name (`GREET`) as the function being published (`greet`).

The MLE specific clause `MLE MODULE <module name>` specifies the JavaScript MLE module that exports the JavaScript function to be called.

The `SIGNATURE` clause specifies the name of the exported function to be called (in this case, `greet`), as well as, optionally, the list of argument types in parentheses. JavaScript MLE functions use TypeScript types in the `SIGNATURE` clause. In this example, the function accepts a JavaScript string. The PL/SQL `VARCHAR2` string is converted to a JavaScript string before invoking the underlying JavaScript implementation. The `SIGNATURE` clause also allows the list of argument types to be omitted, in which case only the MLE function name is expected and MLE language types are inferred from the types given in the call specification's argument list.

The other exported function, `concat()`, can similarly be used to create a PL/SQL function:

```
CREATE OR REPLACE FUNCTION CONCATENATE(str1 in VARCHAR2, str2 in VARCHAR2)
  RETURN VARCHAR2
  AS MLE MODULE jsmodule
  SIGNATURE 'concat(string, string)';
/
```

The call specification in this case additionally specifies the PL/SQL return type of the created function. The value returned by the JavaScript function `concat()` (of type `string`) is converted to the type `VARCHAR2`.

The created procedure and function can be called as shown below with the result:

```
SQL> CALL GREET('Peter');
Hello, Peter

Call completed.

SQL> SELECT CONCATENATE('Hello, ', 'World!');

CONCATENATE('HELLO', 'WORLD!')
-----
Hello, World!
```


## Topics

- [Components of an MLE Call Specification](#)  
The elements of an MLE call specification are listed along with descriptions.
- [MLE Module Clause](#)  
The `MLE MODULE` clause specifies the MLE module that exports the underlying JavaScript function for the call specification. The specified module must always be in the same schema as the call specification being created.
- [ENV Clause](#)  
The optional `ENV` clause specifies the MLE environment for module contexts in which this call specification will be executed.
- [SIGNATURE Clause](#)  
The `SIGNATURE` clause contains all the information necessary to map the MLE call specification to a particular function exported by the specified MLE module.

## Components of an MLE Call Specification

The elements of an MLE call specification are listed along with descriptions.

**Figure 5-1 MLE Call Specification Syntax**

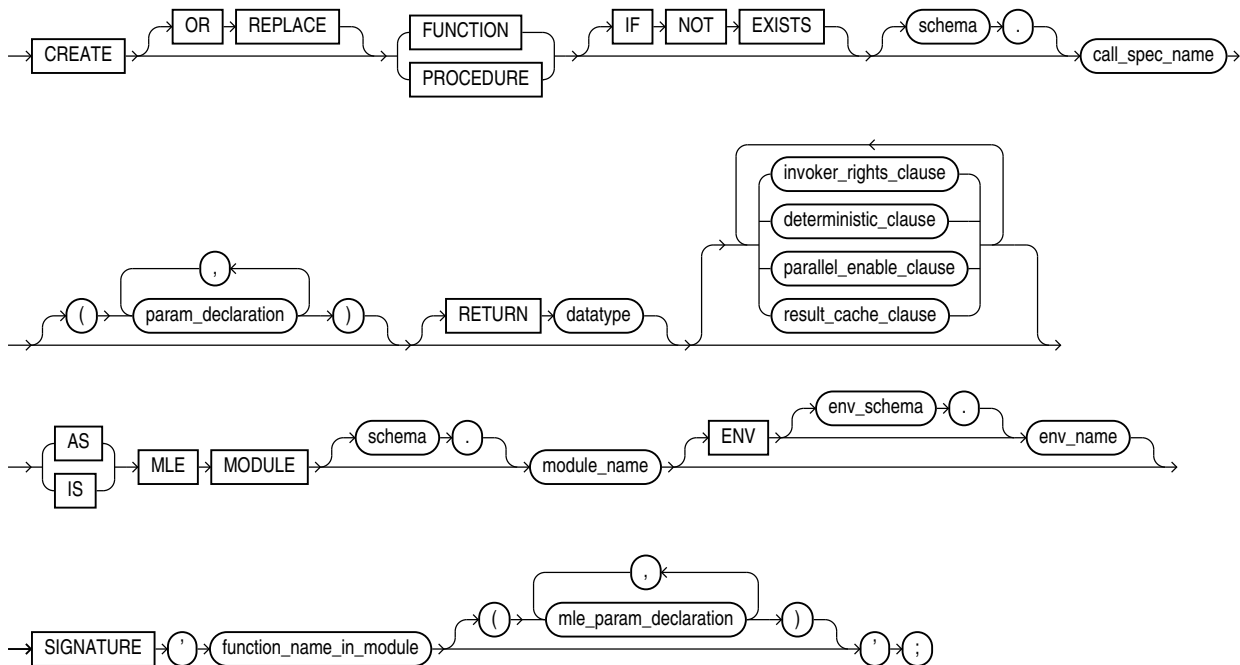

**Table 5-1 Components of an MLE Call Specification**

Element Name	Description
OR REPLACE	Specifies that the function should be replaced if it already exists. This clause can be used to change the definition of an existing function without dropping, recreating, and re-granting object privileges previously granted on the function. Users who had previously been granted privileges on a recreated function or procedure can still access the function without being re-granted the privileges.
IF NOT EXISTS	Specifies that the function should be created if it does not already exist. If a function by the same name does exist, the statement is ignored without error and the original function body remains unchanged. Note that SQL*Plus will display the same output message regardless of whether the command is ignored or executed, ensuring that your DDL scripts remain idempotent.  IF NOT EXISTS cannot be used in combination with OR REPLACE.
schema	Specifies the schema that will contain the call specification. If the schema is omitted, the call specification is created in the schema of the current user.

**Table 5-1 (Cont.) Components of an MLE Call Specification**

Element Name	Description
<code>call_spec_name</code>	Specifies the name of the call specification to be created. Call specifications are created in the default namespace, unlike MLE modules and environments, which use dedicated namespaces.
<code>param_declaration</code>	Specifies the call specification's parameters. If no parameters are specified, parentheses must be omitted.
<code>RETURN datatype</code>	Only used for functions and specifies the data type of the return value of the function. The return value can have any data type supported by MLE. Only the data type is specified; length, precision, or scale information must be omitted.
<code>invoker_rights_clause</code>	Specifies whether a function is invoker's or definer's rights. <ul style="list-style-type: none"> <li><code>AUTHID CURRENT_USER</code> creates an invoker's rights function or procedure.</li> <li><code>AUTHID DEFINER</code> creates a definer's rights function or procedure.</li> </ul> <p>If the <code>AUTHID</code> clause is omitted, the call specification is created with definer's rights by default. The <code>AUTHID</code> clause on MLE call specifications has the exact same semantics as on PL/SQL functions and procedures.</p>
<code>deterministic_clause</code>	Only used for functions and indicates that the function returns the same result value whenever it is called with the same values for its parameters. As with PL/SQL functions, this clause should not be used for functions that access the database in any way that might affect the return result of the function. The results of doing so will not be captured if the database chooses not to re-execute the function.

## MLE Module Clause

The `MLE MODULE` clause specifies the MLE module that exports the underlying JavaScript function for the call specification. The specified module must always be in the same schema as the call specification being created.

An `ORA-04103` error is thrown if the specified MLE module does not exist. Likewise, an `ORA-01031` error is raised if the specified module is in a different schema from the created call specification.

## ENV Clause

The optional `ENV` clause specifies the MLE environment for module contexts in which this call specification will be executed.

An `ORA-04105` error is thrown if the specified environment schema object does not exist.

If this clause is omitted, the default environment is used. The default environment is simply an environment in its most basic state, with no module imports and no specified language options.

## SIGNATURE Clause

The `SIGNATURE` clause contains all the information necessary to map the MLE call specification to a particular function exported by the specified MLE module.

Specifically, it includes two pieces of information:

- The name of the exported function in the specified MLE module.
- The MLE language parameter types (as opposed to the PL/SQL parameter types) for the function (Optional).

The `SIGNATURE` clause must be in the following form:

```
signature = path-spec "(" { language-type, "," } ")"  
path-spec = import-spec | import-spec "." javascript-identifier  
import-spec = javascript-identifier | "default"
```

The path specification describes the function to be called and can have the following two forms:

- A path specification can consist only of an import specification.
  - An import specification can be a JavaScript identifier that identifies a named export of the module, which must be a function. Alternatively, an import specification can be the reserved word, `default`. In this case, the default export of the module is used, which must be a function.
- A path specification can be a composite form consisting of an import specification, followed by a dot and a JavaScript identifier.
  - In this case, the import specification must refer to an object that has a property whose name matches the identifier listed after the dot. The value of the property needs to be a function.

The `language-type` can either be a built-in JavaScript type (e.g. `string` or `number`) or a type provided by MLE (e.g. `OracleNumber` or `OracleDate`) that is compatible with the corresponding PL/SQL argument. For more information about what types are provided by MLE through the built-in module `mle-js-plsqltypes`, see [Server-Side JavaScript API Documentation](#).

`function-name` can include any alphanumeric characters as well as underscores and periods.

When the call specification is a function, the type of the return value is not specified in the `SIGNATURE` clause. Rather, the function can return any JavaScript type that is compatible with the PL/SQL type specified in the call specification's `RETURN` clause.

### Note:

The parsing and resolution of the `SIGNATURE` clause happens lazily when the MLE function is executed for the first time. It is only at this point that any resolution or syntax errors in the `SIGNATURE` clause are reported, and not when the call specification is created.

### Simplified SIGNATURE Clause

CREATE FUNCTION and CREATE PROCEDURE DDL statements also accept a simplified form of the SIGNATURE clause that only specifies the name of the exported function and leaves out the JavaScript language types of the parameters. The default PL/SQL-MLE language type mappings are used in this case.

This example demonstrates the creation of a call specification with a simplified SIGNATURE clause.

```
CREATE OR REPLACE FUNCTION concat
  RETURN VARCHAR2
  AS MLE MODULE jsmodule
  SIGNATURE 'concat';
/
```

When the function `concat` is called from PL/SQL, the input `VARCHAR2` parameters are converted to JavaScript string (the default type mapping for `VARCHAR2`) before calling the underlying JavaScript function.



#### See Also:

[MLE Type Conversions](#) for more information about type mappings

## Creating an Inlined MLE Call Specification

Inlined MLE call specifications embed JavaScript code directly in the CREATE FUNCTION and CREATE PROCEDURE DDLs.

If you want to quickly implement simple functionality using JavaScript, inlined MLE call specifications may be a good choice. With this option, you don't need to deploy a separate module containing the JavaScript code. Rather, the JavaScript function is built into the definition of the call specification itself.

The MLE LANGUAGE clause is used to specify that the function is implemented using JavaScript. The string following the language name is treated as the body of a JavaScript function that implements the functionality of the call specification. When the code is executed, PL/SQL parameters are automatically converted to the default JavaScript type and passed to the JavaScript function as parameters of the same name. Note that unquoted parameter names are mapped to all-uppercase JavaScript names. The value returned by a JavaScript function is converted to the return type of the PL/SQL call specification, just as with call specifications for MLE modules.



#### See Also:

*Oracle Database PL/SQL Packages and Types Reference* for information about `DBMS_MLE` subprograms for inlined call specifications



**Example 5-2 Simple Inlined MLE Call Specification**

```
CREATE OR REPLACE FUNCTION subWorld("strArg" IN VARCHAR2) RETURN
VARCHAR2
AS MLE LANGUAGE JAVASCRIPT
q'~
    return strArg.replace(/World/g, "Universe");
~';
/
```

The function created in the preceding inlined call specification results in the following when called from a SQL statement:

```
SELECT subWorld('Hello, World!');

SUBWORLD('HELLO,WORLD!')
-----
Hello, Universe!
```

**Example 5-3 Inlined MLE Call Specification Returning JSON**

Note the use of double quotation marks in the function parameter name, `strArgs`, in [Example 5-2](#). The inclusion preserves the parameter's letter case. Without quotation marks, the parameter name is mapped to an all-uppercase JavaScript name, as seen in this example.

```
CREATE OR REPLACE FUNCTION p_string_to_JSON(inputString VARCHAR2)
RETURN JSON
AS MLE LANGUAGE JAVASCRIPT
q'~
    if ( INPUTSTRING === undefined ) {
        throw `must provide a string in the form of
key1=value1;...;keyN=valueN`;
    }

    let myObject = {};
    if ( INPUTSTRING.length === 0 ) {
        return myObject;
    }

    const kvPairs = INPUTSTRING.split(";");
    kvPairs.forEach( pair => {
        const tuple = pair.split("=");
        if ( tuple.length === 1 ) {
            tuple[1] = false;
        } else if ( tuple.length !== 2 ) {
            throw "parse error: you need to use exactly one '=' between key
and value and not use '=' in either key or value";
        }
        myObject[tuple[0]] = tuple[1];
    });

    return myObject;
```

```
~';  
/
```

The function created in the preceding inlined call specification results in the following when called from a SQL statement:


```
SELECT p_string_to_JSON('Hello=Greeting');  
  
P_STRING_TO_JSON('HELLO=GREETING')  
-----  
{ "Hello": "Greeting" }
```

- **Components of an Inlined MLE Call Specification**  
The elements of an inlined MLE call specification are listed along with descriptions.
- **Accessing Built-in Modules Using JavaScript Global Variables**  
Rather than importing MLE built-in modules in the same way as call specifications for MLE modules, inlined MLE call specifications utilize prepopulated JavaScript globals to access built-in module functionality.

## Components of an Inlined MLE Call Specification

The elements of an inlined MLE call specification are listed along with descriptions.

**Figure 5-2 MLE Inlined Call Specification Syntax**

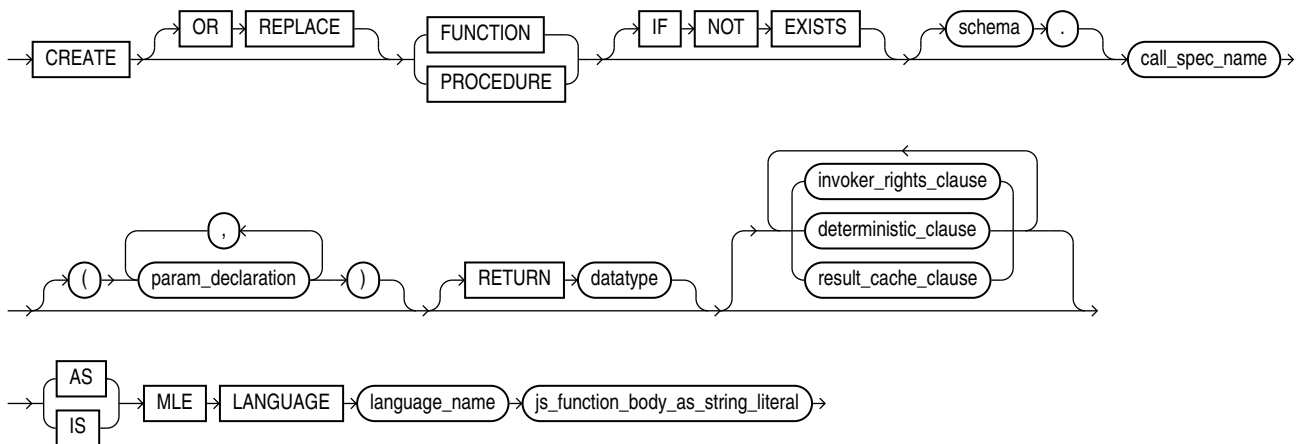

**Table 5-2 Components of an Inlined MLE Call Specification**

Element Name	Description
OR REPLACE	Specifies that the function should be replaced if it already exists. This clause can be used to change the definition of an existing function without dropping, recreating, and re-granting object privileges previously granted on the function. Users who had previously been granted privileges on a recreated function or procedure can still access the function without being re-granted the privileges.

**Table 5-2 (Cont.) Components of an Inlined MLE Call Specification**

Element Name	Description
IF NOT EXISTS	Specifies that the function should be created if it does not already exist. If a function by the same name does exist, the statement is ignored without error and the original function body remains unchanged. Note that SQL*Plus will display the same output message regardless of whether the command is ignored or executed, ensuring that your DDL scripts remain idempotent. IF NOT EXISTS cannot be used in combination with OR REPLACE.
schema	Specifies the schema that will contain the call specification. If the schema is omitted, the call specification is created in the schema of the current user.
call_spec_name	Specifies the name of the call specification to be created. Call specifications are created in the default namespace, unlike MLE modules and environments, which use dedicated namespaces.
param_declaration	Specifies the call specification's parameters. If no parameters are specified, parentheses must be omitted.
RETURN datatype	Only used for functions and specifies the data type of the return value of the function. The return value can have any data type supported by MLE. Only the data type is specified; length, precision, or scale information must be omitted.
invoker_rights_clause	Specifies whether a function is invoker's or definer's rights. <ul style="list-style-type: none"> <li>AUTHID CURRENT_USER creates an invoker's rights function or procedure.</li> <li>AUTHID DEFINER creates a definer's rights function or procedure.</li> </ul> <p>If the AUTHID clause is omitted, the call specification is created with definer's rights by default. The AUTHID clause on MLE call specifications has the exact same semantics as on PL/SQL functions and procedures.</p>
deterministic_clause	Only used for functions and indicates that the function returns the same result value whenever it is called with the same values for its parameters. As with PL/SQL functions, this clause should not be used for functions that access the database in any way that might affect the return result of the function. The results of doing so will not be captured if the database chooses not to re-execute the function.
MLE LANGUAGE	Specifies the language of the following code, for example, JavaScript. The string following the language name is interpreted as MLE language code implementing the desired functionality. For JavaScript, this embedded code is interpreted as the body of a JavaScript function.

## Accessing Built-in Modules Using JavaScript Global Variables

Rather than importing MLE built-in modules in the same way as call specifications for MLE modules, inlined MLE call specifications utilize prepopulated JavaScript globals to access built-in module functionality.

Inlined MLE call specifications cannot import MLE modules, both built-in and custom. Instead, JavaScript global variables, such as the `session` variable, provide access to the functionality of built-in modules like the JavaScript MLE SQL driver. For more

information about the availability of objects in the global scope, see [Working with the MLE JavaScript Driver](#).

If you need to use the functionality of a custom module, you must either use the `import` keyword with call specifications for MLE modules or use the `async/await` interface with dynamic MLE execution.



#### See Also:

[Server-Side JavaScript API Documentation](#) for more information about the built-in JavaScript modules

## Choosing Inlined Versus Module MLE Call Specifications

Each option provides its own advantages and disadvantages depending on your use case.

Inlined MLE call specifications can simplify the development workflow and provide a way to quickly implement simple JavaScript functionality, as there is no need to deploy a separate module containing the JavaScript code. This is a convenient option if you only need to implement a single JavaScript function. You can use JavaScript global variables to access the functionality of MLE built-in modules but, because inlined MLE call specifications are not associated with an MLE environment, modules cannot be imported directly.

Call specifications for MLE modules offer more flexibility in terms of complexity and ability to import functionality from other modules, built-in and custom. You also have the option to override the default JavaScript type mapping, which is not possible with MLE inlined call specifications. Call specifications for MLE modules should be used for larger pieces of JavaScript code as well as for code that you intend to reuse in other JavaScript code using imports.



#### See Also:

[Oracle Database PL/SQL Packages and Types Reference](#) for information about `DBMS_MLE` subprograms for MLE call specifications

## Runtime Isolation for an MLE Call Specification

MLE uses execution contexts to maintain runtime state isolation. Call specifications are associated with separate contexts when they do not share the same user, module, and environment.

MLE execution contexts act as standalone, isolated runtime environments. All JavaScript code that shares an execution context has full access to all of its runtime state (e.g. any global variables previously defined). Otherwise, there is no way for code executing in one execution context to see or modify runtime state in another execution context. Execution contexts for call specifications are created transparently on the first call to any of the corresponding call specifications. For more information, see [About MLE Execution Contexts](#).

When executing call specifications in a session, MLE loads the module specified in the call specification and calls the function(s) exported by that module. In order for the execution of

two call specifications to share the same execution context, they must export a function from the same MLE module, use the same environment, and be executed by the same user. SQL or PL/SQL calls on behalf of different users within the same session are never executed in the same execution context.

The runtime representation of a module is stateful. State constitutes, for example, variables in the JavaScript module as well as variables in the global scope accessible to code in the module. Within the same session, MLE may employ multiple module contexts to execute call specifications. If either the module or the environment referred to by a call specification change, any execution context is invalidated and an error is thrown. [Example 5-4](#) demonstrates this concept.

Session state is very important for data integrity. Not catching errors related to changed session state (ORA-04106 for module changes and ORA-04107 for environment changes in JavaScript, as well as ORA-04068 for PL/SQL packages) can result in silent data corruption. Setting the initialization parameter `SESSION_EXIT_ON_PACKAGE_STATE_ERROR` to `TRUE` forces sessions to be disconnected if the session state is invalidated. Because many applications capture session disconnect, this option can help simplify the recovery from the invalidation of existing session state. For more information about `SESSION_EXIT_ON_PACKAGE_STATE_ERROR`, see *Oracle Database Reference*.

**Note:**

Storing state in packages and JavaScript modules is not recommended. Session state is best handled by the database.

All definer's rights call specifications that publish functions from the same MLE module (and use the same environment) will share the same execution context because all execution happens on behalf of the definer. Conversely, there is a separate execution context per calling user when a call specification is declared as invoker's rights.

For more information about how to build a call specification, see [Components of an MLE Call Specification](#).

**See Also:**

*Oracle Database PL/SQL Language Reference* for information about using `SESSION_EXIT_ON_PACKAGE_STATE_ERROR` to specify behavior when PL/SQL package state is invalidated

**Example 5-4 Execution Context Dependencies**

This example demonstrates the fact that if a module or environment changes, any associated execution context(s) are invalidated.

```
CREATE OR REPLACE MLE MODULE count_module  
LANGUAGE JAVASCRIPT AS
```

```
let myCounter = 0;
```

```
export function incrementCounter(){
    return ++myCounter;
}
/

CREATE OR REPLACE FUNCTION increment_and_get_counter
RETURN NUMBER
AS MLE MODULE count_module
SIGNATURE 'incrementCounter';
/
```

**Session 1** creates its execution context by invoking the function `increment_and_get_counter`:

```
SQL> SELECT increment_and_get_counter;
```

```
INCREMENT_AND_GET_COUNTER
-----
                           1
```

```
SQL> SELECT increment_and_get_counter;
```

```
INCREMENT_AND_GET_COUNTER
-----
                           2
```

Another user invoking the function from a different session, we'll say **session 2**, creates another execution context, separate from the first session's context:

```
SQL> SELECT increment_and_get_counter;
```

```
INCREMENT_AND_GET_COUNTER
-----
                           1
```

The user in **session 1** recreates the MLE module with some new comments added to the function:

```
CREATE OR REPLACE MLE MODULE count_module
LANGUAGE JAVASCRIPT AS

let myCounter = 0;

/**
 * increments a counter before returning the value
 * to the caller
 *@returns {number} the value of the counter
 */
export function incrementCounter(){
    return ++myCounter;
}
/
```

This operation signals to all execution contexts referring to `count_module` that their session state should be invalidated. Session 2 gets an error in response to the invalidation:

```
SQL> SELECT increment_and_get_counter;

SELECT increment_and_get_counter
*
ERROR at line 1:
ORA-04106: Module USER2.COUNT_MODULE referred to by
INCREMENT_AND_GET_COUNTER has been modified since the execution
context was created.
```

The next invocation of the function in session 2 starts off with a reinitialized session state:

```
SQL> SELECT increment_and_get_counter;

INCREMENT_AND_GET_COUNTER
-----
                           1
```

Just as with PL/SQL packages, invoking the function from session 1 does not result in an error. Nevertheless, the session state has been discarded as shown by a subsequent call to the function:

```
SQL> SELECT increment_and_get_counter;

INCREMENT_AND_GET_COUNTER
-----
                           1
```

If the initialization parameter `SESSION_EXIT_ON_PACKAGE_STATE_ERROR` is set to `TRUE` in session 2, the `ORA-04106` error is thrown and the connection to the database is cut:

```
ALTER SESSION SET SESSION_EXIT_ON_PACKAGE_STATE_ERROR = TRUE;
SELECT increment_and_get_counter;
```

**Result:**

```
SELECT increment_and_get_counter
*
ERROR at line 1:
ORA-04106: Module USER2.COUNT_MODULE referred to by
INCREMENT_AND_GET_COUNTER has been modified since the execution
context was created.

ERROR:
ORA-03114: not connected to ORACLE
```

## Dictionary Views for Call Specifications

Metadata about JavaScript call specifications is available in the data dictionary using the [USER | ALL | DBA | CDB]\_MLE\_PROCEDURES views. The family of views maps call specifications (package, function, procedure) to JavaScript modules. This dictionary view is closely modeled after the \*\_PROCEDURES views.

For more information about \*\_MLE\_PROCEDURES, see *Oracle Database Reference*.

### Example 5-5 Show JavaScript Call Specification Metadata

```
SELECT OBJECT_NAME, PROCEDURE_NAME, SIGNATURE, ENV_NAME, MODULE_NAME
       FROM USER_MLE_PROCEDURES;
```

SQL\*Plus output:

OBJECT_NAME MODULE_NAME	PROCEDURE_NAME	SIGNATURE	ENV_NAME
-----	-----	-----	-----
CONCATENATE		concat(string, string)	JSMODULE
DO_NOTHING		doNothing(string)	JSMODULE

## OUT and IN OUT Parameters

Use OUT and IN OUT parameters with MLE JavaScript functions.

MLE JavaScript functions support IN OUT and OUT parameters in addition to IN parameters, just as they are supported in PL/SQL functions and procedures. These are declared as IN OUT and OUT in the list of arguments of an MLE call specification.

Because JavaScript has no notion of output parameters, the JavaScript implementation instead accepts objects that wrap the parameter value. Concretely, the shape of these wrapper objects is described by the following generic TypeScript interfaces InOut and Out (for IN OUT and OUT parameters, respectively):

```
Interface InOut<T> {
    Value : T;
}
```

```
Interface Out<T> {
    Value : T;
}
```

Note that OUT and IN OUT parameters are passed to JavaScript functions as JavaScript objects whose only property, value, exposes the value of the argument. This means that, in order to read, write, and use the value of an OUT or IN OUT argument, it must first be unwrapped by accessing its value property. This is done in order to simulate a pass-by-reference implementation, which does not exist in JavaScript. For example, the substitute() function in [Example 5-6](#) must first unwrap its IN OUT argument, sentence, by retrieving its



value property before calling `match()` on it. Attempting to call `match()` on `sentence` directly would fail, as `sentence` is only the value wrapper. These wrapper classes are never needed in `DBMS_MLE`, which does not make use of `OUT` and `IN OUT` parameters.

### Example 5-6 OUT and IN OUT Parameters with JavaScript

Consider an MLE function, `substitute()`, that takes a `VARCHAR2 IN OUT` parameter, `sentence`, and replaces all occurrences of the second parameter, `replaceThis`, with the third parameter, `withThat`, then returns the number of occurrences of `replaceThis` in `sentence`.

```
CREATE OR REPLACE MLE MODULE in_out_example_mod
LANGUAGE JAVASCRIPT AS

export function substitute (sentence, replaceThis, withThat) {
  /*
   * substitute: substitutes `replaceThis` in `sentence` with
   *             `replaceThat`
   *
   * parameters:
   * - sentence: the input sentence
   * - replaceThis: a word to be replaced in `sentence`
   * - withThat: the new word to be used instead of `replaceThis`
   */
  const occurrences =
    (sentence.value.match(replaceThis) || []).length;
  sentence.value = sentence.value.replace(replaceThis, withThat);
  return occurrences;
}
/

CREATE OR REPLACE FUNCTION f_substitute(
  p_sentence      IN OUT VARCHAR2,
  p_replaceThis  IN VARCHAR2,
  p_withThat     IN VARCHAR2
)
RETURN NUMBER
AS MLE MODULE in_out_example_mod
SIGNATURE 'substitute(InOut<string>, string, string)';
/
```

The `SIGNATURE` clause of the call specification lists the parameter type of the JavaScript function's `sentence` parameter as `InOut<string>`. The input `VARCHAR2` value is therefore converted to a JavaScript `string`, that is then wrapped in an object and passed to the JavaScript function `substitute()`.

```
EXEC dbms_session.reset_package
SET SERVEROUTPUT ON

DECLARE
  l_sentence      varchar2(100) := 'people are enjoying the rain';
  l_replaceThis  varchar2(100) := 'rain';
  l_withThat     varchar2(100) := 'sun';
```

```
    l_occurrences pls_integer;
BEGIN
    dbms_output.put_line('sentence before: ' || l_sentence);
    l_occurrences := f_substitute(
        l_sentence, l_replaceThis, l_withThat);
    if l_occurrences <> 0 then
        dbms_output.put_line('sentence after: ' || l_sentence);
    else
        dbms_output.put_line('no text replacement performed');
    end if;
END;
/
```

**Result:**

```
sentence before: people are enjoying the rain
sentence after:  people are enjoying the sun
```

# 6

## Calling PL/SQL and SQL from the MLE JavaScript SQL Driver

- [Introduction to the MLE JavaScript SQL Driver](#)
- [Selecting Data Using the MLE JavaScript Driver](#)
- [Data Modification](#)
- [Bind Variables](#)
- [PL/SQL Invocation from the MLE JavaScript SQL Driver](#)
- [Error Handling in SQL Statements](#)
- [Working with JSON Data](#)  
The use of JSON data as part of a relational structure, more specifically the use of JSON columns in (relational) tables, is described.
- [Using Large Objects \(LOB\) with MLE](#)
- [API Differences Between `node-oracledb` and `mle-js-oracledb`](#)  
There are several differences between `node-oracledb` and `mle-js-oracledb`, including the methods for handling connection management and type mapping.

### Introduction to the MLE JavaScript SQL Driver

The MLE JavaScript driver is closely modeled after the client-side Oracle SQL driver for Node.js, `node-oracledb`.

This close relationship between the server-side and client-side drivers reduces the effort required to port client-side JavaScript code from Node.js or Deno to the database. Functionality that cannot be reasonably mapped to the server-side environment is omitted from MLE and the MLE JavaScript driver and will throw errors.

This helps you identify those parts of the code requiring changes. Furthermore, the MLE JavaScript implementation is a pure JavaScript implementation. Certain features not part of the ECMAScript standard are unavailable in MLE, such as the window object as well as direct file and network I/O.

The `mle-js-oracledb` SQL driver defaults to a synchronous operating model and partially supports asynchronous execution via `async/await`.



#### Note:

Production code should adhere to industry best practices for error handling and logging, which have been omitted from this chapter's examples for the sake of clarity. Additionally, most examples feature the synchronous execution model due to its greater readability.

 **See Also:**

- [API Differences Between node-oracledb and mle-js-oracledb](#)
- [Server-Side JavaScript API Documentation](#) for more information about the built-in JavaScript modules

### Topics

- [Working with the MLE JavaScript Driver](#)  
Generic workflow for working with the MLE JavaScript driver.
- [Connection Management in the MLE JavaScript Driver](#)
- [Introduction to Executing SQL Statements](#)
- [Processing Comparison Between node-oracledb and mle-js-oracledb](#)  
The `node-oracledb` documentation recommends the use of the `async/await` interface. Due to the nature of client-server interactions, most of the processing involved between node and the database is executed asynchronously.

## Working with the MLE JavaScript Driver

Generic workflow for working with the MLE JavaScript driver.

At a high level, working with the MLE JavaScript driver is very similar to using the client-side `node-oracledb` driver, namely:

1. Get a connection handle to the existing database session.
2. Use the connection to execute a SQL statement.
3. Check the result object returned by the statement executed, as well as any database errors that may have occurred.
4. In the case of select statements, iterate over the resulting cursor.
5. For statements manipulating data, decide whether to commit or roll the transaction back.

Applications that aren't ported from client-side Node.js or Deno can benefit from coding aids available in the MLE JavaScript SQL driver, such as many frequently used variables available in the global scope. These variables include the following:

- `oracledb` for the `OracleDb` driver object
- `session` for the default connection object
- `soda` for the `SodaDatabase` object

Additionally, the following types are available:

- `OracleNumber`
- `OracleClob`
- `OracleBlob`
- `OracleTimestamp`
- `OracleTimestampTZ`

- `OracleDate`

The availability of these objects in the global scope reduces the need to write boilerplate code. For details about global symbols available with the MLE JavaScript SQL driver, see [Server-Side JavaScript API Documentation](#).

## Connection Management in the MLE JavaScript Driver

Considerations when dealing with connection management in the MLE JavaScript driver. Connection management in the MLE JavaScript driver is greatly simplified compared to the client driver. Because a database session will already exist when a JavaScript stored procedure is invoked, you don't need to worry about establishing and tearing down connections, connection pools, and secure credential management, to name just a few.

You need only be concerned with the `getDefaultConnection()` method from the `mle-js-oracledb` module or use the global session object.

## Introduction to Executing SQL Statements

A single SQL or PL/SQL statement can be executed by the `Connection` class's `execute()` method. Query results can either be returned in a single JavaScript array or fetched in batches using a `ResultSet` object.

Fetching as `ResultSet` offers more control over the fetch operation whereas using arrays requires fewer lines of code and provides performance benefits unless the amount of data returned is enormous.

### Example 6-1 Getting Started with the MLE JavaScript SQL Driver

The following code demonstrates how to import the MLE JavaScript SQL driver into the current module's namespace. This example is based on one provided in the `node-oracledb` documentation, [A SQL SELECT statement in Node.js](#).

```
CREATE OR REPLACE MLE MODULE js_sql_mod LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

/**
 * Perform a lookup operation on the HR.DEPARTMENTS table to find all
 * departments managed by a given manager ID and print the result on
 * the console
 * @param {number} managerID the manager ID
 */

function queryExample(managerID) {

  if (managerID === undefined) {
    throw new Error (
      "Parameter managerID has not been provided to queryExample()"
    );
  }
  let connection;

  try {
    connection = oracledb.defaultConnection();
```

```

const result = connection.execute(`
  SELECT manager_id, department_id, department_name
  FROM hr.departments
  WHERE manager_id = :id`,
  [
    managerID
  ],
  {
    outFormat: oracledb.OUT_FORMAT_OBJECT
  }
);
if (result.rows.length > 0) {
  for (let row of result.rows) {
    console.log(`The query found a row:
      manager_id:      ${row.MANAGER_ID}
      department_id:   ${row.DEPARTMENT_ID}
      department_name: ${row.DEPARTMENT_NAME}`);
  }
} else {
  console.log(`no data found for manager ID ${managerID}`);
}

} catch (err) {
  console.error(`an error occurred while processing the query: $
{err.message}`);
}
}

export { queryExample };
/

```

The only function present in the module, `queryExample()`, selects a single row from the HR departments table using a bind variable by calling `connection.execute()`. The value of the bind variable is passed as a parameter to the function. Another parameter passed to `connection.execute()` indicates that each row returned by the query should be provided as a JavaScript object.

If data has been found for a given `managerID`, it is printed on the screen. By default, the call to `console.log()` is redirected to `DBMS_OUTPUT`. Should there be no rows returned a message indicating this fact is printed on the console.

The call specification in the following snippet allows the code to be invoked in the database.

```

CREATE OR REPLACE PROCEDURE p_js_sql_query_ex(
  p_manager_id number)
AS MLE MODULE js_sql_mod
SIGNATURE 'queryExample(number)';
/

```

Provided the defaults are still in place, invoking `p_js_sql_query_ex` displays the following:

```
SQL> set serveroutput on
SQL> EXEC p_js_sql_query_ex(103)
The query found a row:
manager_id:      103
department_id:   60
department_name: IT
```



### See Also:

[Server-Side JavaScript API Documentation](#) for more information about the built-in JavaScript modules, including `mle-js-oracledb`

## Example 6-2 Use Global Variables to Simplify SQL Execution

[Example 6-1](#) can be greatly simplified for use with MLE. Variables injected into the global scope can be referenced, eliminating the need to import the `mle-js-oracledb` module. Additionally, because only a single function is defined in the module, an inline call specification saves even more typing.

```
CREATE OR REPLACE PROCEDURE js_sql_mod_simplified(
    "managerID" number
) AS MLE LANGUAGE JAVASCRIPT
q'~
if (managerID === undefined || managerID === null){
    throw new Error (
        "Parameter managerID has not been provided to
js_sql_mod_simplified()"
    );
}

const result = session.execute(`
SELECT
    manager_id,
    department_id,
    department_name
FROM
    hr.departments
WHERE
    manager_id = :id`,
    [ managerID ]
);

if(result.rows.length > 0){
    for(let row of result.rows){
        console.log(
            `The query found a row:
manager_id: ${row.MANAGER_ID}
department_id: ${row.DEPARTMENT_ID}
department_name: ${row.DEPARTMENT_NAME}`
        );
    }
};
```

```
    }  
  } else {  
    console.log(`no data found for manager ID ${managerID}`);  
  }  
  ~';  
/  
  
js_sql_mod_simplified  
  
SQL> set serveroutput on  
SQL> exec js_sql_mod_simplified(100);  
  
The query found a row:  
manager_id:      100  
department_id:   90  
department_name: Executive
```

## Processing Comparison Between node-oracledb and mle-js-oracledb

The `node-oracledb` documentation recommends the use of the `async/await` interface. Due to the nature of client-server interactions, most of the processing involved between `node` and the database is executed asynchronously.

The MLE JavaScript SQL driver does not require asynchronous processing. Like the PL/SQL driver, this is thanks to the driver's location within the database. The MLE JavaScript SQL driver understands the `async/await` syntax, however, it processes requests synchronously under the hood.

Unlike the `node-oracledb` driver, the MLE JavaScript SQL driver returns rows as objects (`oracledb.OUT_FORMAT_OBJECT`) rather than arrays (`oracledb.OUTFORMAT_ARRAY`) when using the ECMAScript 2022 syntax. Code still relying on the deprecated `require` syntax remains backwards compatible by returning rows as an array.

### Note:

A promise-based interface is not provided with the MLE JavaScript driver.

## Selecting Data Using the MLE JavaScript Driver

Data can be selected using Direct Fetches or `ResultSet` objects. You can choose between arrays and objects as the output format. The default is to return data through Direct Fetch using JavaScript objects.

### Topics

- [Direct Fetch: Arrays](#)
- [Direct Fetch: Objects](#)
- [Fetching Rows as ResultSets: Arrays](#)
- [Fetching Rows as ResultSets: Iterating Over ResultSet Objects](#)



## Direct Fetch: Arrays

Direct Fetches are the default in the MLE JavaScript driver.

Direct Fetches provide query results in `result.rows`. This is a multidimensional JavaScript array if you specify the `outFormat` as `oracledb.OUT_FORMAT_ARRAY`. Iterating over the rows allows you to access columns based on their position in the select statement. Changing the column order in the select statement requires modifications in the parsing of the output. Because this can lead to bugs that are hard to detect, the MLE JavaScript SQL driver returns objects by default (`oracledb.OUT_FORMAT_OBJECT`), rather than arrays.

[Example 6-3](#) demonstrates Direct Fetches using the synchronous execution model.

### Example 6-3 Selecting Data Using Direct Fetch: Arrays

```
CREATE OR REPLACE PROCEDURE dir_fetch_arr_proc
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
  `SELECT
    department_id,
    department_name
  FROM
    hr.departments
  FETCH FIRST 5 ROWS ONLY`,
  [],
  {
    outFormat: oracledb.OUT_FORMAT_ARRAY
  }
);
for (let row of result.rows) {
  const deptID = String(row[0]).padStart(3, '0');
  const deptName = row[1];
  console.log(`department ID: ${deptID} - department name: ${deptName}`);
}
~';
/

BEGIN
  dir_fetch_arr_proc;
END;
/
```

#### Result:

```
department ID: 010 - department name: Administration
department ID: 020 - department name: Marketing
department ID: 030 - department name: Purchasing
department ID: 040 - department name: Human Resources
department ID: 050 - department name: Shipping
```

The `execute()` function returns a `result` object. Different properties are available for further processing depending on the statement type (select, insert, delete, etc.).

For information about `mle-js-oracledb`, see [Server-Side JavaScript API Documentation](#).

## Direct Fetch: Objects

JavaScript objects are returned by default when using Direct Fetch. To address potential problems with the ordering of columns in the select list, results are returned as JavaScript objects rather than as arrays.

### Example 6-4 Selecting Data Using Direct Fetch: Objects

```
CREATE OR REPLACE PROCEDURE dir_fetch_obj_proc
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
  `SELECT
    department_id,
    department_name
  FROM
    hr.departments
  FETCH FIRST 5 ROWS ONLY`,
  [],
  { outFormat: oracledb.OUT_FORMAT_OBJECT }
);

for (let row of result.rows) {
  const deptID = String(row.DEPARTMENT_ID).padStart(3, '0');
  const deptName = row.DEPARTMENT_NAME;
  console.log(`department ID: ${deptID} - department name: $
{deptName}`);
}
~';
/

BEGIN
  dir_fetch_obj_proc();
END;
/
```

#### Result:

```
department ID: 010 - department name: Administration
department ID: 020 - department name: Marketing
department ID: 030 - department name: Purchasing
department ID: 040 - department name: Human Resources
department ID: 050 - department name: Shipping
```

Unlike PL/SQL, JavaScript doesn't support the concept of named parameters. The `execute()` method accepts the SQL statement, `bindParams`, and `options`, in that exact order. The query doesn't use bind variables, thus an empty array matches the function's signature.

**See Also:**

[Server-Side JavaScript API Documentation](#) for more information about the `mle-js-oracledb` built-in module

## Fetching Rows as ResultSets: Arrays

You can use `ResultSet` objects as an alternative to using Direct Fetches. In addition to using Direct Fetches, it is possible to use `ResultSet` objects. A `ResultSet` is created when the option property `resultSet` is set to `true`. `ResultSet` rows can be fetched using `getRow()` or `getRows()`.

Because rows are fetched as JavaScript objects by default instead of as arrays, `outFormat` must be defined as `oracledb.OUT_FORMAT_ARRAY` in order to fetch rows as a `ResultSet`.

### Example 6-5 Fetching Rows Using a ResultSet

```
CREATE OR REPLACE PROCEDURE dir_fetch_rs_arr_proc
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
  `SELECT
    department_id,
    department_name
  FROM
    hr.departments
  FETCH FIRST 5 ROWS ONLY`,
  [],
  {
    resultSet: true,
    outFormat: oracledb.OUT_FORMAT_ARRAY
  }
);

const rs = result.resultSet;
let row;
while ((row = rs.getRow())){
  const deptID = String(row[0]).padStart(3, '0');
  const deptName = row[1];
  console.log(`department ID: ${deptID} - department name: ${deptName}`);
}
rs.close();
~';
/
```

Note that the fetch operation specifically requested an array rather than an object. Objects are returned by default.

```
EXEC dir_fetch_rs_arr_proc();
```

**Result:**

```

department ID: 010 - department name: Administration
department ID: 020 - department name: Marketing
department ID: 030 - department name: Purchasing
department ID: 040 - department name: Human Resources
department ID: 050 - department name: Shipping

```

## Fetching Rows as ResultSets: Iterating Over ResultSet Objects

In addition to the `ResultSet.getRow()` and `ResultSet.getRows()` functions, the MLE JavaScript driver's `ResultSet` implements the iterable and iterator protocols, simplifying the process for iterating over the `ResultSet`.

Using either the iterable or iterator protocols is possible. Both greatly simplify working with `ResultSets`. Each option is demonstrated in [Example 6-6](#) and [Example 6-7](#).

**Note:**

`ResultSet` objects must be closed once they are no longer needed.

### Example 6-6 Using the Iterable Protocol with ResultSets

This example shows how to use the iterable protocol as an alternative to `ResultSet.getRow()`. Rather than providing an array of column values, the JavaScript objects are returned instead.

```

CREATE OR REPLACE PROCEDURE rs_iterable_proc
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
  `SELECT
    department_id,
    department_name,
  FROM
    hr.departments
  FETCH FIRST 5 ROWS ONLY`,
  [],
  {
    resultSet: true;
  }
);
const rs = result.resultSet;
for (let row of rs){
  const deptID = String(row.DEPARTMENT_ID).padStart(3, '0');
  const deptName = row.DEPARTMENT_NAME;
  console.log(`department ID: ${deptID} - department name: $
{deptName}`);
}
rs.close();
~';
/

```

```
BEGIN
    rs_iterable_proc;
END;
/
```

**Result:**

```
department ID: 010 - department name: Administration
department ID: 020 - department name: Marketing
department ID: 030 - department name: Purchasing
department ID: 040 - department name: Human Resources
department ID: 050 - department name: Shipping
```

**Example 6-7 Using the Iterator Protocol with ResultSets**

This example shows how you can iterate over a `ResultSet` using the iterator protocol. This is a reimplementation of [Example 6-6](#).

```
CREATE OR REPLACE PROCEDURE rs_iterator_proc
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
    `SELECT
        department_id,
        department_name
    FROM
        hr.departments
    FETCH FIRST 5 ROWS ONLY`,
    [],
    {
        resultSet: true
    }
);
const iterator = result.resultSet.iterator();
let row = iterator.next();
while(! row.done){
    const deptID = String(row.value.DEPARTMENT_ID).padStart(3, '0');
    const deptName = row.value.DEPARTMENT_NAME;
    console.log(`department ID: ${deptID} - department name: ${deptName}`);
    row.iterator.next();
}

result.resultSet.close();
~';
/

EXEC rs_iterator_proc();
```

**Result:**

```
department ID: 010 - department name: Administration
department ID: 020 - department name: Marketing
department ID: 030 - department name: Purchasing
```

```
department ID: 040 - department name: Human Resources  
department ID: 050 - department name: Shipping
```

## Data Modification

Modify data using the MLE JavaScript SQL driver.

In addition to selecting data, it is possible to insert, update, delete, and merge data using the MLE JavaScript SQL driver. The same general workflow can be applied to these operations as you would use when selecting data.

### Example 6-8 Updating a Row Using the MLE JavaScript SQL Driver

```
CREATE OR REPLACE MLE MODULE row_update_mod LANGUAGE JAVASCRIPT AS  
import oracledb from "mle-js-oracledb";  
export function updateCommissionExampleEmpID145() {  
  const conn = oracledb.defaultConnection();  
  const result = conn.execute(  
    `UPDATE employees  
    SET commission_pct = commission_pct * 1.1  
    WHERE employee_id = 145`  
  );  
  return result.rowsAffected;  
}  
/
```

The `result` object's `rowsAffected` property can be interrogated to determine how many rows have been affected by the update. The JavaScript function `updateCommissionExampleEmpID145()` returns the number of rows affected to the caller. In this instance, the function will return 1.

An alternative method to update data is to use the `connection.executeMany()` method. This function works best when used with bind variables.

## Bind Variables

Use bind variables to control data passed into or retrieved from the database. SQL and PL/SQL statements may contain bind variables, indicated by colon-prefixed identifiers. These parameters indicate where separately specified values are substituted in a statement when executed, or where values are to be returned after execution.

Three different kinds of bind variables exist in the Oracle database:

- IN bind variables
- OUT bind variables
- IN OUT bind variables

IN binds are values passed into the database. OUT binds are used to retrieve data from the database. IN OUT binds are passed in and may return a different value after the statement executes.

Using bind variables is recommended in favor of constructing SQL or PL/SQL statements through string concatenation or template literals. Both performance and

security can benefit from the use of bind variables. When bind variables are used, the Oracle database does not have to perform a resource and time consuming hard-parse operation. Instead, it can reuse the cursor already present in the cursor cache.



#### Note:

Bind variables cannot be used in DDL statements such as `CREATE TABLE`, nor can they substitute the text of a query, only data.

#### Topics

- [Using Bind-by-Name vs Bind-by-Position](#)  
Bind variables are used in two ways: by name by position. You must pick one for a given SQL command as the options are mutually exclusive.
- [RETURNING INTO Clause](#)
- [Batch Operations](#)

## Using Bind-by-Name vs Bind-by-Position

Bind variables are used in two ways: by name by position. You must pick one for a given SQL command as the options are mutually exclusive.

#### Topics

- [Named Bind Variables](#)
- [Positional Bind Variables](#)

## Named Bind Variables

Binding by name requires the bind variable to be a string literal, prefixed by a colon. In the case of named binds, the `bindParam` argument to the `connection.execute()` function should ideally be provided with the following properties of each bind variable defined.

Property	Description
<code>dir</code>	The bind variable direction
<code>val</code>	The value to be passed to the SQL statement
<code>type</code>	The data type

### Example 6-9 Using Named Bind Variables

```
CREATE OR REPLACE PROCEDURE named_binds_ex_proc(
    "deptName" VARCHAR2,
    "sal" NUMBER
)
AS MLE LANGUAGE JAVASCRIPT
q'~
if (deptName === null || sal === null){
    throw new Error(
        `must provide deptName and sal to named_binds_ex_proc()`
    );
};
```

```

}

const result = session.execute(
  `SELECT
    e.first_name ||
    '    ' ||
    e.last_name employee_name,
    e.salary
  FROM
    hr.employees e
    LEFT JOIN hr.departments d ON (e.department_id =
d.department_id)
  WHERE
    nvl(d.department_name, 'n/a') = :deptName
    AND salary > :sal
  ORDER BY
    e.employee_id`,
  {
    deptName: {
      dir: oracledb.BIND_IN,
      val: deptName,
      type: oracledb.STRING
    },
    sal: {
      dir: oracledb.BIND_IN,
      val: sal,
      type: oracledb.NUMBER
    }
  }
);
console.log(`Listing employees working in ${deptName} with a salary > ${
sal}`);
for (let row of result.rows){
  console.log(`${row.EMPLOYEE_NAME.padEnd(25)} - ${row.SALARY}`);
}
~';
/

```

The `bindParams` argument to `connection.execute()` defines two named bind parameters:

- `deptName`
- `sal`

In this example, the function's input parameters match the names of the bind variables, which improves readability but isn't a requirement. You can assign bind variable names as long as the mapping in `bindParams` is correct.

## Positional Bind Variables

Instead of using named bind parameters, you can alternatively provide bind-variable information as an array.

The number of elements in the array must match the number of bind parameters in the SQL text. Rather than mapping by name, the mapping of bind variable and value is



based on the position of the bind variable in the text and position of the item in the bind array.

### Example 6-10 Using Positional Bind Variables

This example demonstrates the use of positional bind variables and represents a reimplementation of [Example 6-9](#)

```
CREATE OR REPLACE PROCEDURE positional_binds_ex_proc(
    "deptName" VARCHAR2,
    "sal" NUMBER,
)
AS MLE LANGUAGE JAVASCRIPT
q'~
if (deptName === null || sal === null){
    throw new Error(
        `must provide deptName and sal to positional_binds_ex_proc()`
    );
}

const result = session.execute(
    `SELECT
        e.first_name ||
        ' ' ||
        e.last_name employee_name,
        e.salary
    FROM
        hr.employees e
        LEFT JOIN hr.departments d ON (e.department_id = d.department_id)
    WHERE
        nvl(d.department_name, 'n/a') = :deptName
        AND salary > :sal
    ORDER BY
        e.employee_id`,
    [
        deptName,
        sal
    ]
);
console.log(`Listing employees working in ${deptName} with a salary > $
{sal}`);
for(let row of result.rows){
    console.log(`${row.EMPLOYEE_NAME.padEnd(25)} - ${row.SALARY}`);
}
~';
/
```

In this example, `bindParams` is an array rather than an object. The mapping between bind variables in the SQL text to values is done by position. The first item in the `bindParams` array maps to the first occurrence of a placeholder in the SQL text and so on.

## RETURNING INTO Clause

The use of the `RETURNING INTO` clause is described.  
The `RETURNING INTO` clause allows you to

- Fetch values changed during an update
- Return auto-generated keys during a single-row insert operation
- List rows deleted

### Example 6-11 Using the RETURNING INTO Clause

This example shows how to retrieve the old and new values after an update operation. These values can be used for further processing.

```
CREATE OR REPLACE PROCEDURE ret_into_ex_proc(
    "firstEmpID" NUMBER,
    "lastEmpID" NUMBER
)
AS MLE LANGUAGE JAVASCRIPT
q'~
if (firstEmpID === null || lastEmpID === null){
    throw new Error(
        `must provide deptName and sal to ret_into_ex_proc()`
    );
}

const result = session.execute(
    `UPDATE
     hr.employees
    SET
     last_name = upper(last_name)
    WHERE
     employee_id between :firstEmpID and :lastEmpID
RETURNING
     old last_name
     new last_name
INTO
     :oldLastName,
     :newLastName`,
    {
        firstEmpID: {
            dir: oracledb.BIND_IN,
            val: firstEmpID,
            type: oracledb.NUMBER
        },
        lastEmpID: {
            dir: oracledb.BIND_IN,
            val: lastEmpID,
            type: oracledb.NUMBER
        },
        oldLastName: {
            type: oracledb.STRING,
            dir: oracledb.BIND_OUT
        },
        newLastName: {
            type: oracledb.STRING,
            dir: oracledb.BIND_OUT
        }
    }
);
```

```

if (result.rowsAffected > 1){
    console.log(
        `update() completed successfully:
        - old values: ${JSON.stringify(result.outBinds.oldLastName)}
        - new values: ${JSON.stringify(result.outBinds.newLastName)}`
    );
} else {
    throw new Error(
        `found no row to update in range ${firstEmpID} to ${lastEmpID}`
    );
}
~';
/

```

This example features both IN and OUT bind variables:

- `firstEmpID` and `lastEmpID` specify the data range to be updated
- `oldLastName` is an array containing all the last names as they were before the update
- `newLastName` is another array containing the new values

## Batch Operations

In addition to calling the `connection.execute()` function, it is possible to use `connection.executeMany()` to perform batch operations.

Using `connection.executeMany()` is like calling `connection.execute()` multiple times but requires less work. This is an efficient way to handle batch changes, for example, when inserting or updating multiple rows. The `connection.executeMany()` method cannot be used for queries.

`connection.execute()` expects an array containing variables to process by the SQL statement. The `bindData` array in [Example 6-12](#) contains multiple JavaScript objects, one for each bind variable defined in the SQL statement. The for loop constructs the objects and adds them to the `bindData` array.

In addition to the values to be passed to the batch operation, the MLE JavaScript SQL driver needs to know about the values' data types. This information is passed as the `bindDefs` property in the `connection.executeMany()` options parameter. Both old and new last names in [Example 6-12](#) are character strings with the `changeDate` defined as a date.

Just as with the `connection.execute()` function, `connection.executeMany()` returns the `rowsAffected` property, allowing you to quickly identify how many rows have been batch processed.

### Example 6-12 Performing a Batch Operation

This example extends [Example 6-10](#) by inserting the old and new last names into an audit table.

```

CREATE OR REPLACE PROCEDURE ret_into_audit_ex_proc(
    "firstEmpID" NUMBER,
    "lastEmpID" NUMBER
)
AS MLE LANGUAGE JAVASCRIPT

```

```
q'~
if (firstEmpID === null || lastEmpID === null){
    throw new Error(
        `must provide deptName and sal to ret_into_audit_ex_proc()`
    );
}

let result = session.execute(
    `UPDATE
     hr.employees
  SET
     last_name = upper(last_name)
 WHERE
     employee_id between :firstEmpID and :lastEmpID
 RETURNING
     old last_name,
     new last_name
 INTO
     :oldLastName,
     :newLastName`,
    {
        firstEmpID: {
            dir: oracledb.BIND_IN,
            val: firstEmpID,
            type: oracledb.NUMBER
        },
        lastEmpID: {
            dir: oracledb.BIND_IN,
            val: lastEmpID,
            type: oracledb.NUMBER
        },
        oldLastName: {
            type: oracledb.STRING,
            dir: oracledb.BIND_OUT
        };
        newLastName: {
            type: oracledb.STRING,
            dir: oracledb.BIND_OUT
        }
    }
);

if (result.rowsAffected > 1){
    // store the old data and new values in an audit table
    let bindData = [];
    const changeDate = new Date();
    for (let i = 0; i < result.outBinds.oldLastName.length, i++){
        bindData.push(
            {
                oldLastName: result.outBinds.oldLastName[i],
                newLastName: result.outBinds.newLastName[i],
                changeDate: changeDate
            }
        );
    }
}
```

```

// use executeMany() with the newly populated array
result = session.executeMany(
  `insert into EMPLOYEES_AUDIT_OPERATIONS(
    old_last_name,
    new_last_name,
    change_date
  ) values (
    :oldLastName,
    :newLastName,
    :changeDate
  )`,
  bindData,
  {
    bindDefs: {
      oldLastName: {type: oracledb.STRING, maxSize: 30},
      newLastName: {type: oracledb.STRING, maxSize: 30},
      changeDate: {type: oracledb.DATE}
    }
  }
);
} else {
  throw new Error(
    `found no row to update in range ${firstEmpID} to ${lastEmpID}`
  );
}
~';
/

```

After the initial update statement completes, the database provides the old and new values of the `last_name` column affected by the update in the `result` object's `outBinds` property. Both `oldLastName` and `newLastName` are arrays. The array length represents the number of rows updated.

## PL/SQL Invocation from the MLE JavaScript SQL Driver

Use the MLE JavaScript driver to call functions and procedures from PL/SQL. Most of the Oracle Database's API is provided in PL/SQL. This is not a problem; you can easily call PL/SQL from JavaScript. Invoking PL/SQL using the MLE JavaScript SQL driver is similar to calling SQL statements.

### Example 6-13 Calling PL/SQL from JavaScript

```

CREATE OR REPLACE MLE MODULE plsql_js_mod
LANGUAGE JAVASCRIPT AS
/**
 * Read the current values for module and action and return them as
 * a JavaScript object. Typically set before processing starts to
 * allow you to restore the values if needed.
 * @returns an object containing module and action
 */
function preserveModuleAction(){
  //Preserve old module and action. DBMS_APPLICATION_INFO provides
  // current module and action as OUT binds

```

```
let result = session.execute(
  `BEGIN
    DBMS_APPLICATION_INFO.READ_MODULE(
      :l_module,
      :l_action
    );
  END;`,
  {
    l_module: {
      dir: oracledb.BIND_OUT,
      type: oracledb.STRING
    },
    l_action: {
      dir: oracledb.BIND_OUT,
      type: oracledb.STRING
    }
  }
);

// Their value can be assigned to JavaScript variables
const currentModule = result.outBinds.l_module;
const currentAction = result.outBinds.l_action;

// ... and returned to the caller
return {
  module: currentModule,
  action: currentAction
}
}

/**
 * Set module and action using DBMS_APPLICATION_INFO
 * @param theModule the module name to set
 * @param theAction the name of the action to set
 */
function setModuleAction(theModule, theAction){
  session.execute(
    `BEGIN
      DBMS_APPLICATION_INFO.SET_MODULE(
        :module,
        :action
      );
    END;`,
    [
      theModule,
      theAction
    ]
  );
}

/**
 * The only public function in this module simulates some heavy
 * processing for which module and action are set using the built-in
 * DBMS_APPLICATION_INFO package.
 */
```

```
export function plsqlExample(){
  // preserve the values for module and action before we begin
  const moduleAction = preserveModuleAction();

  // set the new values to reflect the function's execution
  // within the module
  setModuleAction(
    'plsql_js_mod',
    'plsqlExample()'
  )

  // Simulate some intensive processing... While this is ongoing
  // module and action in v$session should have changed to the
  // values set earlier. You can check using
  // SELECT module, action FROM v$session WHERE module = 'plsql_js_mod'
  session.execute(
    `BEGIN
      DBMS_SESSION.SLEEP(60);
    END;`
  );

  // and finally reset the values to what they were before
  setModuleAction(
    moduleAction.module,
    moduleAction.action
  );
}
/
```

This example is a little more elaborate than previous ones, separating common functionality into their own (private) functions. You can see the use of `OUT` variables in `preserveModuleAction()`'s call to `DBMS_APPLICATION_INFO`. The values can be retrieved using `result.outBinds`.

After storing the current values of module and action in local variables, additional anonymous PL/SQL blocks are invoked, first setting module and action before entering a 60-second sleep cycle simulating complex data processing. Once the simulated data processing routine finishes, the module and action are reset to their original values using named `IN` bind variables. Using bind variables is more secure than string concatenation.

Setting module and action is an excellent way of informing the database about ongoing activity and allows for better activity grouping in performance reports.

## Error Handling in SQL Statements

JavaScript provides an exception framework like Java. Rather than returning an `Error` object as a promise or callback as in `node-oracledb`, the MLE JavaScript driver resorts to throwing errors. This concept is very familiar to PL/SQL developers. Using try-catch-finally in JavaScript code is similar to the way PL/SQL developers use begin-exception-end blocks to trap errors during processing.

Use the JavaScript `throw()` command if an exception should be re-thrown. This causes the error to bubble-up the stack after it has been dealt with in the catch block. [Example 6-15](#) demonstrates this concept.

**Example 6-14 SQL Error Handling Inside a JavaScript Function**

```
CREATE OR REPLACE MLE MODULE js_err_handle_mod
LANGUAGE JAVASCRIPT AS

/**
 *short demo showing how to use try/catch to catch an error
 *and proceeding normally. In the example, the error is
 *provoked
 */
export function errorHandlingDemo(){

    try{
        const result = session.execute(
            `INSERT INTO
              surelyThisTableDoesNotExist
            VALUES
              (1)`
        );

        console.log(`there were ${result.rowsAffected} rows inserted`);

    } catch(err) {
        logError('this is some message', err);

        //tell the caller that something went wrong
        return false;
    }

    //further processing

    //return successful completion of the code
    return true;
}

/**
 *log an error using the fictional "logging_pkg". Think of it as
 *a package logging errors in a framework for later analysis.
 *@param msg an accompanying message
 *@param err the error encountered
 */
function logError(msg, err){
    const result = session.execute(
        `BEGIN
          logging_pkg.log_err(
            p_msg => :msg
            p_err => :err
          );
        END;`,
        {
            msg: {
                val: msg,
                dir: oracledb.BIND_IN
            },
            err: {
```



```

        val: err.message,
        dir: oracledb.BIND_IN
    }
}
);
}
/

```

Create a function, `js_err_handle_mod_f`, using the module `js_err_handle_mod` as follows:

```

CREATE OR REPLACE FUNCTION js_err_handle_mod_f
RETURN BOOLEAN
AS MLE MODULE js_err_handle_mod
SIGNATURE 'errorHandlingDemo()';
/

```

Now you can call the function and use the return value to see whether the processing was successful:

```

DECLARE
    l_success boolean := false;
BEGIN
    l_success := js_err_handle_mod_f;

    IF l_success THEN
        DBMS_OUTPUT.PUT_LINE('normal, successful completion');
    ELSE
        DBMS_OUTPUT.PUT_LINE('an error has occurred');
    END IF;
END;
/

```

In this case, the error is caught handled within the MLE module. The error is recorded by the application, allowing the administrator to assess the situation and take corrective action.

### Example 6-15 Error Handling Using JavaScript `throw()` Command

This example demonstrates the use of the JavaScript `throw()` command in the catch block. Unlike the screen output shown for `js_err_handle_mod` in [Example 6-14](#), a calling PL/SQL block will have to catch the error and either treat it accordingly or raise it again.

```

CREATE OR REPLACE MLE MODULE js_throw_mod
LANGUAGE JAVASCRIPT AS

/**
 *a similar example as Example 6-14, however, rather than
 *processing the error in the JavaScript code, it is re-thrown up the call
 *stack.
 *It is now up to the called to handle the exception. The try/catch block is
 *not
 *strictly necessary but is used in this example as a cleanup step to remove
 *Global
 *Temporary Tables (GTTs) and other temporary objects that are no longer

```

```
required.  
*/  
export function rethrowError(){  
  
    try{  
        const result = session.execute(  
            `INSERT INTO  
                surelyThisTableDoesNotExist  
            VALUES  
                (1)`  
        );  
  
        console.log(`there were ${result.rowsAffected} rows inserted`);  
  
    } catch(err){  
        cleanUpBatch();  
  
        throw(err);  
    }  
  
    //further processing  
}  
  
function cleanUpBatch(){  
    console.log(  
        `this is where you would perform cleanup tasks before  
returning`  
    );  
}  
/  
/
```

Using the following call specification, failing to catch the error will result in an unexpected error, which can propagate up the call stack all the way to the end user.

```
CREATE OR REPLACE PROCEDURE rethrow_err_proc  
AS MLE MODULE js_throw_mod  
SIGNATURE 'rethrowError()';  
/  
  
BEGIN  
    rethrow_err_proc;  
END;  
/  
/
```

#### Result:

```
BEGIN  
*  
ERROR at line 1:  
ORA-00942: table or view does not exist  
ORA-04171: at rethrowError (USER1.JS_THROW_MOD:11:24)  
ORA-06512: at "USER1.RETHROW_ERROR_PROC", line 1  
ORA-06512: at line 2
```

End users should not see this type of error. Instead, a more user-friendly message should be displayed. Continuing the example, a simple fix is to add an exception block:

```
BEGIN
    rethrow_err_proc;
EXCEPTION
    WHEN OTHERS THEN
        logging_pkg.log_err(
            'something went wrong',
            sqlerrm
        );
        --this would be shown on the user interface;
        --for the sake of demonstration this workaround
        --is used to show the concept
        DBMS_OUTPUT.PUT_LINE(
            'ERROR: the process encountered an unexpected error'
        );
        DBMS_OUTPUT.PUT_LINE(
            'please inform the administrator referring to application error
1234'
        );
END;
/
```

#### Result:

```
ERROR: the process encountered an unexpected error
please inform the administrator referring to application error 1234

PL/SQL procedure successfully completed.
```

## Working with JSON Data

The use of JSON data as part of a relational structure, more specifically the use of JSON columns in (relational) tables, is described.

Oracle Database supports JSON natively with relational database features, including transactions, indexing, declarative querying, and views. Unlike relational data, JSON data can be stored in the database, indexed, and queried without any need for a schema.<sup>1</sup>

Oracle also provides a family of Simple Oracle Document Access (SODA) APIs for access to JSON data stored in the database. SODA is designed for schemaless application development without knowledge of relational database features or languages such as SQL and PL/SQL. It lets you create and store collections of documents in Oracle Database, retrieve them, and query them without needing to know how the documents are stored in the database.

JSON data is widely used for exchanging information between the application tier and the database. Oracle REST Data Services (ORDS) is the most convenient tool for making REST calls to the database. [Example 6-16](#) demonstrates this concept.

---

<sup>1</sup> A JSON schema is not to be confused with the concept of a database schema: a database schema in Oracle Database is a separate namespace for database users to create objects such as tables, indexes, views, and many others without risking naming collisions.

Manipulating JSON is one of JavaScript's core capabilities. Incoming JSON documents don't require parsing using `JSON.parse()`, they can be used straight away. Micro-service architectures greatly benefit from the enhanced options offered by JavaScript in the database.

 **See Also:**

- [Working with SODA Collections in MLE JavaScript Code](#) for a detailed discussion of SODA and JavaScript in the database
- *Oracle Database JSON Developer's Guide* for information about the use of JSON in Oracle Database

### Example 6-16 Inserting JSON Data into a Database Table

This example assumes that a REST API has been published in ORDS, allowing users to POST JSON data to the database. This way, administrators have the option to upload further departments into the `departments` table. Once the JSON data has been received, the MLE module uses `JSON_TABLE()` to convert the JSON data structure into a relational model.

```
CREATE OR REPLACE MLE MODULE RestApiModule LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function insertDepartments(depts) {

    // the input parameter must be valid JSON. This is ensured by using
    // JSON as a parameter in the call specification

    const conn = oracledb.defaultConnection();

    // convert JSON input to relational data and insert into a table
    const result = conn.execute(`
        INSERT INTO departments (
            department_id,
            department_name,
            manager_id,
            location_id
        )
        SELECT
            jt.*
        FROM json_table(:depts, '$[*]' columns
            department_id path '$.department_id',
            department_name path '$.department_name',
            manager_id path '$.manager_id',
            location_id path '$.location_id'
        ) jt`,
        {
            depts: {
                val: depts,
                type: oracledb.DB_TYPE_JSON
            }
        }
    );
}
```

```
    }  
  );  
}  
/
```

Using the following anonymous PL/SQL block to simulate the REST call, additional departments can be inserted into the table:

```
DECLARE  
  l_success boolean := false;  
  l_depts JSON;  
BEGIN  
  l_depts := JSON('[  
    {  
      "department_id": 1010,  
      "department_name": "New Department 1010",  
      "manager_id": 200,  
      "location_id": 1700  
    },  
    {  
      "department_id": 1020,  
      "department_name": "New Department 1020",  
      "manager_id": 201,  
      "location_id": 1800  
    },  
    {  
      "department_id": 1030,  
      "department_name": "New Department 1030",  
      "manager_id": 114,  
      "location_id": 1700  
    },  
    {  
      "department_id": 1040,  
      "department_name": "New Department 1040",  
      "manager_id": 203,  
      "location_id": 2400  
    }  
  ]'  
);  
  
  l_success := restAPIExample(l_depts);  
  
  IF NOT l_success THEN  
    RAISE_APPLICATION_ERROR(  
      -20001,  
      'an unexpected error occurred'  
    );  
  END IF;  
END;  
/
```

The data has been inserted successfully as demonstrated by the following query:

```
SELECT *
FROM hr.departments
WHERE department_id > 1000;
```

Result:

DEPARTMENT_ID	DEPARTMENT_NAME	MANAGER_ID	LOCATION_ID
1010	New Department	1010	200
1020	New Department	1020	201
1030	New Department	1030	114
1040	New Department	1040	203

### Example 6-17 Use JavaScript to Manipulate JSON Data

Rather than using SQL functions like `JSON_TABLE`, `JSON_TRANSFORM`, and so on, it is possible to perform JSON data manipulation in JavaScript as well.

This example is based on the `J_PURCHASEORDER` table as defined in *Oracle Database JSON Developer's Guide*. This table stores a JSON document containing purchase orders from multiple customers. Each purchase order consists of one or more line items.

The following function, `addFreeItem()`, allows the addition of a free item to customers ordering merchandise in excess of a threshold value.

```
CREATE OR REPLACE MLE MODULE purchase_order_mod
LANGUAGE JAVASCRIPT AS

/**
 *a simple function accepting a purchase order and checking whether
 *its value is high enough to merit the addition of a free item
 *
 *@param {object} po the purchase order to be checked
 *@param {object} freeItem which free item to add to the order free of
charge
 *@param {number} threshold the minimum order value before a free item
can be added
 *@param {boolean} itemAdded a flag indicating whether the free item
was successfully added
 *@returns {object} the potentially updated purchaseOrder
 *@throws exception in case
 *   -any of the mandatory parameters is null
 *   -in the absence of line items
 *   -if the free item has already been added to the order
 */
export function addFreeItem(po, freeItem, threshold, itemAdded){

    //ensure values for parameters have been provided
    if(po == null || freeItem == null || threshold == null){
        throw new Error(`mandatory parameter either not provided or
null`);
    }
}
```

```

    }

    //make sure there are line items provided by the purchase order
    if(po.LineItems === undefined) {
        throw new Error(
            `PO number ${po.PONumber} does not contain any line items`
        );
    }

    //bail out if the free item has already been added to the purchase order
    if(po.LineItems.find(({Part}) => Part.Description ===
freeItem.Part.Description)){
        throw new Error(`${freeItem.Part.Description} has already been added
to order ${po.PONumber}`);
    }

    //In, Out, and InOut Parameters are implemented in JavaScript using
    //special interfaces
    itemAdded.value = false;

    //get the total order value
    const poValue = po.LineItems
        .map(x => x.Part.UnitPrice * c.Quantity)
        .reduce(
            (accumulator, currentValue) => accumulator + currentValue, 0
        );

    //add a free item to the purchase order if its value exceeds
    //the threshold
    if(poValue > threshold){

        //update the ItemNumber
        freeItem.ItemNumber = (po.LineItems.length + 1)
        po.LineItems.push(freeItem);
        itemAdded.value = true;
    }

    return po;
}
/

```

For more information about using bind parameters with JavaScript, see [OUT and IN OUT Parameters](#).

## Using Large Objects (LOB) with MLE

A PL/SQL wrapper type is used to handle CLOBs and BLOBs with the MLE JavaScript driver. Handling large objects such as CLOBs (Character Large Object) and BLOBs (Binary Large Object) with the MLE JavaScript driver differs from the `node-oracledb` driver. Rather than using a Node.js Stream interface, a PL/SQL wrapper type is used. The wrapper types for BLOBs and CLOBs are called `OracleBlob` and `OracleClob`, respectively. They are defined in `mle-js-plsqltypes`. Most types are exposed in the global scope and can be referenced without having to import the module.

 **Note:**

BFILE, commonly counted among LOBs, is not supported.

 **See Also:**

[Server-Side JavaScript API Documentation](#) for more information about `mle-js-plsqltypes` and the other JavaScript built-in modules

**Topics**

- [Writing LOBs](#)  
An example shows how to initialize and write to a CLOB that is finally inserted into a table.
- [Reading LOBs](#)  
An example is used to show how to select a CLOB and then use the `fetchInfo` property to read the contents of the CLOB as a string.

## Writing LOBs

An example shows how to initialize and write to a CLOB that is finally inserted into a table.

**Example 6-18 Inserting a CLOB into a Table**

This example demonstrates how to insert a CLOB into a table. The table defines two columns: an ID column to be used as a primary key and a CLOB column named "C".

```
CREATE TABLE mle_lob_example (  
    id NUMBER GENERATED ALWAYS AS IDENTITY,  
    CONSTRAINT pk_mle_blob_table PRIMARY KEY(id),  
    c CLOB  
);  
  
CREATE OR REPLACE PROCEDURE insert_clob  
AS MLE LANGUAGE JAVASCRIPT  
q'~  
//OracleClob is exposed in the global scope and does not require  
//importing 'mle-js-plsqltypes', similar to how oracledb is available  
let theClob = OracleClob.createTemporary(false);  
  
theClob.open(OracleClob.LOB_READWRITE);  
theClob.write(  
    1,  
    'This is a CLOB and it has been inserted by the MLE JavaScript SQL  
Driver'  
);  
  
const result = session.execute(  
    `INSERT INTO mle_lob_example(c) VALUES(:theCLOB)`,
```



```

        {
            theCLOB:{
                type: oracledb.ORACLE_CLOB,
                dir: oracledb.BIND_IN,
                val: theCLOB
            }
        }
    );

    //it is best practice to close the handle to free memory
    theCLOB.close();
    ~';
    /

```

CLOBs and BLOBs are defined in `mle-js-plsqltypes`. Most commonly used types are provided in the global scope, rendering the import of `mle-js-plsqltypes` unnecessary.

The first step is to create a temporary, uncached LOB locator. Following the successful initialization of the LOB, it is opened for read and write operations. A string is written to the CLOB with an offset of 1. Until this point, the LOB exists in memory. The call to `session.execute()` inserts the CLOB in the table. Calling the `close()` method closes the CLOB and frees the associated memory.

## Reading LOBs

An example is used to show how to select a CLOB and then use the `fetchInfo` property to read the contents of the CLOB as a string.

Reading an LOB from the database is no different from reading other columns. [Example 6-19](#) demonstrates how to fetch the row inserted by procedure `insert_clob`, defined in [Example 6-18](#).

### Example 6-19 Read an LOB

```

CREATE OR REPLACE FUNCTION read_clob(
    "p_id" NUMBER
) RETURN VARCHAR2
AS MLE LANGUAGE JAVASCRIPT
q'~
const result = session.execute(
    `SELECT c
    FROM mle_lob_example
    WHERE id = :id`,
    {
        id:{
            type: oracledb.NUMBER,
            dir: oracledb.BIND_IN,
            val: p_id
        }
    },
    {
        fetchInfo:{
            "C": {type: oracledb.STRING}
        },
        outFormat: oracledb.OBJECT
    }

```

```

    }
  );
  if (result.rows.length === 0){
    throw new Error(`No data found for ID ${id}`);
  } else {
    for (let row of result.rows){
      return row.C;
    }
  }
  ~';
/

```

The function `read_clob` receives an ID as a parameter. It is used in the select statement's `WHERE` clause as a bind variable to identify a row containing the CLOB. The `fetchInfo` property passed using `session.execute()` instructs the database to fetch the CLOB as a string.

## API Differences Between node-oracledb and mle-js-oracledb

There are several differences between `node-oracledb` and `mle-js-oracledb`, including the methods for handling connection management and type mapping.



### See Also:

[Server-Side JavaScript API Documentation](#) for more information about JavaScript built-in modules

### Topics

- [Synchronous API and Error Handling](#)
- [Connection Handling](#)
- [Transaction Management](#)
- [Type Mapping](#)
- [Unsupported Data Types](#)
- [Miscellaneous Features Not Available with the MLE JavaScript SQL Driver](#)

## Synchronous API and Error Handling

Compared to `node-oracledb`, the `mle-js-oracledb` driver operates in a synchronous mode, throwing exceptions as they happen. If an asynchronous behavior is desired, calls to `mle-js-oracledb` can be wrapped into async functions.

During synchronous operations, API calls block until either a result or an error are returned. Errors caused by SQL execution are reported as JavaScript exceptions, otherwise they return the same properties as the `node-oracledb` `Error` object.

The following methods neither return a promise nor do they take a callback parameter. They either return the result or throw an exception.

- `connection.execute`
- `connection.executeMany`
- `connection.getStatementInfo`
- `connection.getSodaDatabase`
- `connection.commit`
- `connection.rollback`
- `resultset.close`
- `resultset.getRow`
- `resultset.getRows`

The following method cannot be implemented in a synchronous way and is omitted in the MLE JavaScript driver.

- `connection.break`

`node-oracledb` provides a LOB (Large Object) class to provide streaming access to LOB types. The LOB class implements the asynchronous Node.js Stream API and cannot be supported in the synchronous MLE JavaScript environment. Large objects are supported using an alternative API in the MLE JavaScript driver. For these reasons, the following LOB-related functionality is not supported.

- `connection.createLob`
- property `oracledb.lobPrefetchSize`
- constant `oracledb.BLOB`
- constant `oracledb.CLOB`

`node-oracledb` also implements asynchronous streaming of query results, another feature that's based on the Node.js Stream API. A streaming API cannot be represented in a synchronous interface as used by the MLE JavaScript driver, therefore the following functionality is not available.

- `connection.queryStream()`
- `resultSet.toQueryStream()`

## Connection Handling

The method of connection handling with the MLE JavaScript driver is described.

All SQL statements that are executed via the server-side MLE JavaScript driver are executed in the current session that is running the JavaScript program. SQL statements are executed with the privileges of the user on whose behalf JavaScript code is executed. As in the `node-oracledb` API, JavaScript code using the MLE JavaScript driver must acquire a Connection object to execute SQL statements. However, the only connection available is the implicit connection to the current database session.

JavaScript code must acquire a connection to the current session using the MLE-specific `oracledb.defaultConnection()` method. On each invocation, it returns a connection object that represents the session connection. Creation of connections with the `oracledb.createConnection` method of `node-oracledb` is not supported by the MLE

JavaScript driver; neither is the creation of a connection pool supported. Connection objects are implicitly closed and so the call to `connection.close()` is not available with the MLE JavaScript driver.

There is also no statement cursor caching with the MLE JavaScript driver and therefore there is no `stmtCacheSize` property.

The Real Application Cluster (RAC) option offers additional features, designed to increase availability of applications. These include Fast Application Notification (FAN) and Runtime Load Balancing (RLB), neither of which are supported by the MLE JavaScript driver.

## Transaction Management

With respect to transaction management, server-side MLE JavaScript code behaves exactly like PL/SQL procedures and functions.

A JavaScript program is executed in the current transaction context of the calling SQL or PL/SQL statement. An ongoing transaction can be controlled by executing `COMMIT`, `SAVEPOINT`, or `ROLLBACK` commands. Alternatively, the methods `connection.commit()` and `connection.rollback()` can be used.

MLE JavaScript SQL driver connections cannot be explicitly closed. Applications relying on `node-oracledb` behavior where closing a connection performs a rollback of the transaction will need adjusting. The MLE JavaScript SQL driver neither performs implicit commit nor rollback of transactions.

The `node-oracledb` driver features an auto-commit flag, defaulting to `false`. The MLE JavaScript SQL driver does not implement this feature. If specified, the `connection.execute()` function ignores the parameter.

## Type Mapping

The MLE JavaScript driver adheres to the behavior of `node-oracledb` with respect to conversions between PL/SQL types and JavaScript types.

By default, PL/SQL types map to native JavaScript types (except for BLOBs and CLOBs). Values fetched from query results are implicitly converted. See [MLE Type Conversions](#) for more details about MLE type mappings.

As with `node-oracledb`, the conversion from non-character data types and vice versa is directly impacted by the NLS session parameters. The MLE runtime locale has no impact on these conversions.

To avoid loss of precision when converting between native JavaScript types and PL/SQL data types, the MLE JavaScript driver introduces new wrapper types.

- `oracledb.ORACLE_NUMBER`
- `oracledb.ORACLE_CLOB`
- `oracledb.ORACLE_BLOB`
- `oracledb.ORACLE_TIMESTAMP`
- `oracledb.ORACLE_TIMESTAMP_TZ`
- `oracledb.ORACLE_DATE`
- `oracledb.ORACLE_INTERVAL_YM`

- `oracledb.ORACLE_INTERVAL_DS`

As with `node-oracledb`, the default mapping to JavaScript types may be overridden on a case-by-case basis using the `fetchInfo` property on `connection.execute()`. Type constants like `oracledb.ORACLE_NUMBER` may be used to override the type mapping for a specific `NUMBER` column in order to avoid implicit conversion and loss of precision.

Additionally, the JavaScript MLE SQL driver provides a way to change the default mapping of PL/SQL types globally. If the `oracledb.fetchAsPlsqlWrapper` property contains the corresponding type constant, Oracle values are fetched as SQL wrapper types previously described. As with the existing property `oracledb.fetchAsString`, this behavior can be overridden using `fetchInfo` and `oracledb.DEFAULT`. Because MLE JavaScript does not support a `Buffer` class, and instead uses `Uint8Array`, property `oracledb.fetchAsBuffer` from `node-oracledb` does not exist in `mle-js-oracledb`, which instead uses `oracledb.fetchAsUint8Array`.

Changing the type mapping to fetch JavaScript SQL wrapper types by default accounts for the following scenarios:

- Oracle values are mainly moved between queries and DML statements, so that the type conversions between PL/SQL and JavaScript types are an unnecessary overhead.
- It is crucial to avoid data loss.

### Example 6-20 Using JavaScript Native Data Types vs Using Wrapper Types

This example demonstrates the effect of using JavaScript native data types for calculations. It also compares the loss of precision using JavaScript native types versus using wrapper types.

```
CREATE OR REPLACE MLE MODULE js_v_wrapper_mod
LANGUAGE JAVASCRIPT AS

/**
 *There is a potential loss of precision when using native
 *JavaScript types to perform certain calculations. This
 *is caused by the underlying implementation as a floating
 *point number
 */

export function precisionLoss(){

    let summand1 = session
        .execute(`SELECT 0.1 summand1`)
        .rows[0].SUMMAND1;

    let summand2 = session
        .execute(`SELECT 0.2 summand2`)
        .rows[0].SUMMAND2;

    const result = summand1 + summand2;

    console.log(`precisionLoss() result: ${result}`);
}

/**
 *Use an Oracle data type to preserve precision. The above
```

```

*example can be rewritten using the OracleNumber type as
*follows
*/
export function preservePrecision(){

    //instruct the JavaScript SQL driver to return results as
    //Oracle Number. This could have been done for individual
    //statements using the fetchInfo property - the global
    //change applies to this and all future calls
    oracledb.fetchAsPlsqlWrapper = [oracledb.NUMBER];
    let summand1 = session
        .execute(`SELECT 0.1 S1`)
        .rows[0].S1;

    let summand2 = session
        .execute(`SELECT 0.2 S2`)
        .rows[0].S2;

    //note that you must use functions defined for type
    //OracleNumber rather than arithmetic operators. For example,
    //summand1.add(summand2) cannot be replaced by summand1+summand2
    const result = summand1.add(summand2);

    console.log(`preservePrecision() result: ${result}`);
}
/

```

When executing the above functions, the difference in precision becomes immediately obvious.

```

precisionLoss() result: 0.30000000000000004
preservePrecision() result: .3

```

Rather than setting the global `oracledb.fetchAsPlsqlWrapper` property, it is possible to override the setting per invocation of `connection.execute()`. [Example 6-21](#) shows how `precisionPreservedGlobal()` can be rewritten by setting precision inline.

For information about functions available for use with type `OracleNumber`, see [Server-Side JavaScript API Documentation](#).

#### Example 6-21 Overriding the Global `oracledb.fetchAsPlsqlWrapper` Property

This example extends [Example 6-20](#) by showing how `precisionPreservedGlobal()` can be rewritten by preserving precision inline. It demonstrates that rather than setting the global `oracledb.fetchAsPlsqlWrapper` property, it is possible to override the setting per invocation of `connection.execute()`.

```

CREATE OR REPLACE PROCEDURE fetch_info_example
AS MLE LANGUAGE JAVASCRIPT
q'~
    let summand1 = session
        .execute(
            `SELECT 0.1 S1`,
            [],

```

```

        {
            fetchInfo:{
                S1:{type: oracledb.ORACLE_NUMBER}
            }
        }
    )
    .rows[0].S1;

let summand2 = session
    .execute(
        `SELECT 0.2 S2`,
        [],
        {
            fetchInfo:{
                S2:{type: oracledb.ORACLE_NUMBER}
            }
        }
    )
    .rows[0].S2;

const result = summand1.add(summand2);

console.log(`
preservePrecision():
summand1: ${summand1}
summand2: ${summand2}
result: ${result}
`);
~';
/

```

## Unsupported Data Types

The MLE JavaScript driver does not currently support these data types:

- LONG
- LONG RAW
- XMLType
- BFILE
- REF CURSOR

## Miscellaneous Features Not Available with the MLE JavaScript SQL Driver

Differences between what features are available with the MLE JavaScript driver and with `node-oracledb` are described.

Error handling in the MLE JavaScript driver relies on the JavaScript exception framework rather than using a callback/promise as `node-oracledb` does. The error thrown by the MLE JavaScript SQL driver is identical to the `Error` object available with `node-oracledb`.

Several additional client-side features available in `node-oracledb` are not supported by the server-side MLE environment. The MLE JavaScript driver omits the API for these features.

The following features are currently unavailable:

- Continuous Query Notification (CQN)
- Advanced Queuing is not supported natively, the PL/SQL API can be used as a workaround
- `Connection.subscribe()`
- `Connection.unsubscribe()`
- All Continuous Query Notification constants in the `oracledb` class
- All Subscription constants in the `oracledb` class



# 7

## Working with SODA Collections in MLE JavaScript Code

Simple Oracle Document Access (SODA) is a set of NoSQL-style APIs that let you create and store collections of documents (in particular JSON) in Oracle Database, retrieve them, and query them, without needing to know Structured Query Language (SQL) or how the documents are stored in the database.

SODA APIs exist for different programming languages and include support for MLE JavaScript. SODA APIs are *document-centric*. You can use any SODA implementation to perform create, read, update, and delete (CRUD) operations on documents of nearly any kind (including video, image, sound, and other binary content). You can also use any SODA implementation to query the content of JavaScript Object Notation (JSON) documents using pattern-matching: query-by-example (QBE). CRUD operations can be driven by document keys or by QBEs.

This chapter covers JavaScript in the database, based on Multilingual Engine (MLE) as opposed to the client-side `node-oracledb` driver. Whenever JavaScript is mentioned in this chapter it implicitly refers to MLE JavaScript.



### See Also:

*Oracle Database Introduction to Simple Oracle Document Access (SODA) for a complete introduction to SODA*

### Topics

- [High-Level Introduction to Working with SODA for In-Database JavaScript](#)  
The SODA API is part of the MLE JavaScript SQL driver. Interaction with collections and documents requires you to establish a connection with the database first, before a SODA database object can be obtained.
- [SODA Objects](#)  
Objects used with the SODA API.
- [Using SODA for In-Database JavaScript](#)  
How to access SODA for In-Database JavaScript is described, as well as how to use it to perform create, read (retrieve), update, and delete (CRUD) operations on collections.

## High-Level Introduction to Working with SODA for In-Database JavaScript

The SODA API is part of the MLE JavaScript SQL driver. Interaction with collections and documents requires you to establish a connection with the database first, before a SODA database object can be obtained.

The SODA database is the top-level abstraction object when working with the SODA API.

Figure 7-1 demonstrates the standard control flow.

Figure 7-1 SODA for In-Database JavaScript Basic Workflow



Applications that aren't ported from client-side Node.js or Deno can benefit from coding aids available in the MLE JavaScript SQL driver, such as a number of frequently used variables that are available in the global scope. For a complete list of available global variables and types, see [Working with the MLE JavaScript Driver](#).

For SODA applications the most important global variable is the `soda` object, which represents the `SodaDatabase` object. The availability of the `soda` object in the global scope reduces the need for writing boilerplate code.

## SODA Objects

Objects used with the SODA API.

The following objects are at the core of the SODA API:

- **SodaDatabase:** The top-level object for SODA operations. This is acquired from an Oracle Database connection. A SODA database is an abstraction, allowing access to SODA collections in that SODA database, which then allow access to documents in those collections. A SODA database is analogous to an Oracle

Database user or schema. A collection is analogous to a table. A document is analogous to a table row with one column for a unique document key, a column for the document content, and other columns for various document attributes. With the MLE JavaScript SQL driver, the `soda` object is available as a global variable, which represents the `SodaDatabase` object and reduces the need for writing boilerplate code.

- **SodaCollection:** Represents a collection of SODA documents. By default, collections allow JSON documents to be stored, and they add a default set of metadata to each document. This is recommended for most users. However optional metadata can set various details about a collection, such as its database storage, whether it should track version and time stamp document components, how such components are generated, and what document types are supported.
- **SodaDocument:** Represents a document. Typically, the document content will be JSON. The document has properties including the content, a key, timestamps, and the media type. By default, document keys are automatically generated.

When working with collections and documents stored therein, you will make use of the following objects:

- **SodaDocumentCursor:** A cursor object representing the result of the `getCursor()` method from a `find()` operation. It can be iterated over to access each `SodaDocument`.
- **SodaOperation:** An internal object used with `find()` to perform read and write operations on documents. Chained methods set properties on a `SodaOperation` object which is then used by a terminal method to find, count, replace, or remove documents. This is an internal object that should not be directly accessed.



#### See Also:

[Server-Side JavaScript API Documentation](#) for information about using SODA objects with `mle-js-oracledb`

## Using SODA for In-Database JavaScript

How to access SODA for In-Database JavaScript is described, as well as how to use it to perform create, read (retrieve), update, and delete (CRUD) operations on collections.

This section describes SODA for MLE JavaScript. Code snippets in this section are sometimes abridged for readability. Care has been taken to ensure that JavaScript functions are listed in their entirety, but they aren't runnable on their own. Embedding the function definition into a JavaScript module and importing the MLE JavaScript SQL driver will convert these code examples to valid JavaScript code for Oracle Database 23c.

### Topics

- [Getting Started with SODA for In-Database JavaScript](#)  
How to access SODA for In-Database JavaScript is described, as well as how to use it to create a database collection, insert a document into a collection, and retrieve a document from a collection.
- [Creating a Document Collection with SODA for In-Database JavaScript](#)  
How to use SODA for In-Database JavaScript to create a new document collection is explained.

- [Opening an Existing Document Collection with SODA for In-Database JavaScript](#)  
You can use the method `SodaDatabase.openCollection()` to open an existing document collection or to test whether a given name names an existing collection.
- [Checking Whether a Given Collection Exists with SODA for In-Database JavaScript](#)  
You can use `SodaDatabase.openCollection()` to check for the existence of a given collection. It returns `null` if the collection argument does not name an existing collection; otherwise, it opens the collection having that name.
- [Discovering Existing Collections with SODA for In-Database JavaScript](#)  
You can use `SodaDatabase.getCollectionNames()` to fetch the names of all existing collections for a given `SodaDatabase` object.
- [Dropping a Document Collection with SODA for In-Database JavaScript](#)  
You use `SodaCollection.drop()` to drop an existing collection.
- [Creating Documents with SODA for In-Database JavaScript](#)  
Creation of documents by SODA for In-Database JavaScript is described.
- [Inserting Documents into Collections with SODA for In-Database JavaScript](#)  
`SodaCollection.insertOne()` or a related call such as `sodaCollection.insertOneAndGet()` offers convenient ways to add documents to a collection. These methods create document keys automatically, unless the collection is configured with client-assigned keys and the input document provides the key.
- [Saving Documents into Collections with SODA for In-Database JavaScript](#)  
You use `SodaCollection.save()` and `saveAndGet()` to save documents into collections.
- [SODA for In-Database JavaScript Read and Write Operations](#)  
The primary way you specify read and write operations (other than insert and save) is to use methods provided by the `SodaOperation` class. You can chain together `SodaOperation` methods to specify read or write operations against a collection.
- [Finding Documents in Collections with SODA for In-Database JavaScript](#)  
To find documents in a collection, you invoke `SodaCollection.find()`. It creates and returns a `SodaOperation` object which is used via method chaining with nonterminal and terminal methods.
- [Replacing Documents in a Collection with SODA for In-Database JavaScript](#)  
To replace the content of one document in a collection with the content of another, you start by looking up the document to be modified using its key. Because `SodaOperation.key()` is a nonterminal operation, the easiest way to replace the contents is to chain `SodaOperation.key()` to `SodaOperation.replaceOne()` or `SodaOperation.replaceOneAndGet()`.
- [Removing Documents from a Collection with SODA for In-Database JavaScript](#)  
Removing documents from a collection is similar to replacing. The first step is to perform a lookup operation, usually based on the document's key or by using a search expression in `SodaOperation.filter()`. The call to `SodaOperation.remove()` is a terminal operation, in other words the last operation in the chain.
- [Indexing the Documents in a Collection with SODA for In-Database JavaScript](#)  
Indexes can speed up data access, regardless of whether you use the NoSQL style SODA API or a relational approach. You index documents in a SODA

collection using `SodaCollection.createIndex()`. Its `IndexSpec` parameter is a textual JSON index specification.

- [Getting a Data Guide for a Collection with SODA for In-Database JavaScript](#)  
A data guide is a summary of the structural and type information contained in a set of JSON documents. It records metadata about the fields used in those documents. They provide great insights into JSON documents and are invaluable for getting an overview of a data set.
- [Handling Transactions with SODA for In-Database JavaScript](#)  
Unlike the client-side JavaScript SQL driver, the MLE JavaScript SQL driver does not provide an `autoCommit` feature. You need to commit or roll your transactions back, either in the PL/SQL layer in case of module calls, or directly in the JavaScript code by calling `connection.commit()` or `connection.rollback()`.
- [Summary Example of Using SODA for In-Database JavaScript](#)  
An end-to-end example is included to demonstrate using SODA for In-Database JavaScript from start to finish.

## Getting Started with SODA for In-Database JavaScript

How to access SODA for In-Database JavaScript is described, as well as how to use it to create a database collection, insert a document into a collection, and retrieve a document from a collection.

Before you can get started working with SODA for MLE JavaScript, the account used for storing collections must be granted the `SODA_APP` roles:

```
grant soda_app to soda_user
```

Accessing SODA functionality requires the use of the MLE JavaScript SQL driver. Because the database session exists by the time the code is invoked, no additional connection handling is necessary. [Example 7-1](#) demonstrates how to:

- Create a SODA collection,
- Insert a JSON document into it, and
- Iterate over all SODA Documents in the collection, printing their contents on screen

Each concept presented by [Example 7-1](#) - creating collections, adding and modifying documents, and dropping collections - is addressed in more detail later in this chapter.

### Example 7-1 SODA with MLE JavaScript General Workflow

This example demonstrates the general workflow using SODA collections with MLE JavaScript.

```
CREATE OR REPLACE MLE MODULE intro_soda_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function testSODA(dropCollection) {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();
```

```
// get a SODA database
const db = connection.getSodaDatabase();

// Create a collection with the name "MyJSONCollection".
// This creates a database table, also named "MyJSONCollection",
// to store the collection. If a collection with the same name
// exists it will be opened
const col = db.createCollection("MyJSONCollection");

// Create a JSON document (based on the HR.EMPLOYEES table for
employee 100)
const doc = {
  "employee_id": 100,
  "job_id": "AD_PRES",
  "last_name": "King",
  "first_name": "Steven",
  "email": "SKING",
  "manager_id": null,
  "department_id": 90
};

// Insert the document into a collection.
col.insertOne(doc);

// Find all documents in the collection and print them on screen
try {

  // use a cursor to iterate over all documents in the collection
  const c = col.find().getCursor();

  let resultDoc;
  while (resultDoc = c.getNext()) {
    const content = resultDoc.getContent();

    console.log(`
-----
key:           ${resultDoc.key}
content (select fields):
- employee_id  ${content.employee_id}
- job_id       ${content.job_id}
- name         ${content.first_name} $
{content.last_name}
version:       ${resultDoc.version}
last modified: ${resultDoc.lastModified}
created on:    ${resultDoc.createdOn}
media type:    ${resultDoc.mediaType}`
    );
  }

  // it is very important to close the SODADocumentCursor to
free resources
  c.close();
} catch (err) {
  throw err;
}
```

```
// commit open transactions
connection.commit();

// optionally drop the collection
if (dropCollection) {
    col.drop();
}
/
```

## Creating a Document Collection with SODA for In-Database JavaScript

How to use SODA for In-Database JavaScript to create a new document collection is explained.

Collections allow you to logically group documents. Before a collection can be created or accessed, a few more steps must be completed. Begin by creating a connection object. The connection object is the starting point for all SODA interactions in the MLE JavaScript module:

```
// get a connection handle to the database session
const connection = oracledb.defaultConnection();
```

Once the connection is obtained, you can use it to call `Connection.getSodaDatabase()`, a prerequisite for creating the collection:

```
// get a SODA database
const db = connection.getSodaDatabase();
```

With the SODA database available, the final step is to create the collection. Note that collection names are case-sensitive:

```
// Create a collection with the name "MyJSONCollection".
// This creates a database table, also named "MyJSONCollection",
// to store the collection. If a collection with the same name
// exists, it will be opened
const col = db.createCollection("MyJSONCollection");
```

The preceding statement creates a collection that, by default, allows JSON documents to be stored. If the collection name passed to `SodaDatabase.createCollection()` is that of an existing collection, it will simply be opened. You can alternatively open a known, existing collection using `SodaDatabase.openCollection()`.

Unless custom metadata (as seen in [Example 7-2](#)) is provided to `SodaDatabase.createCollection()`, *default collection metadata* will be supplied. The default metadata has the following characteristics:

- Each document in the collection has these components:
  - Key
  - Content

- Creation timestamp
- Last-modified timestamp
- Version
- The collection can store only JSON documents.
- Document keys and version information are generated automatically using a Universally Unique Identifier (UUID) function.

Optional collection metadata can be provided to the call to `createCollection()`, however, the default collection configuration is recommended in most cases.

If a collection with the same name already exists, it is simply opened and its object is returned. If custom metadata is passed to the method and does not match that of the existing collection, the collection is not opened and an error is raised. To match, all metadata fields must have the same values.

#### See Also:

*Oracle Database Introduction to Simple Oracle Document Access (SODA)* for more details about collection metadata.

### Example 7-2 Creating a Collection with Custom Metadata

This example demonstrates how to create a collection with custom metadata. Rather than storing the key as an automatically created UUID value stored in a `VARCHAR2` column, the key is stored as a numeric field.

```
export function createCustomCollection() {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database  
    const db = connection.getSodaDatabase();  
  
    // create a collection with custom metadata. Unless a custom  
    // metadata field (keyColumn, versionColumn) is specified it  
    // will not be used/present in the collection. The metadata  
    // argument is mostly based on the defaults except for the  
    // client-assigned key column  
    const col = db.createCollection(  
        "myCustomCollection",  
        {  
            "metaData": {  
                "keyColumn": {  
                    "name": "ID",  
                    "sqlType": "NUMBER",  
                    "assignmentMethod": "CLIENT"  
                },  
                "versionColumn": {  
                    "name": "VERSION",  
                    "method": "UUID"  
                }  
            }  
        }  
    );  
}
```



```

        },
        "lastModifiedColumn": {
            "name": "LAST_MODIFIED"
        },
        "creationTimeColumn": {
            "name": "CREATED_ON"
        }
    }
}
);
console.log(`
    Custom collection created.
    Assignment method: ${col.metaData.keyColumn.assignmentMethod}`
);
}

```

Although the `keyColumn` is the only field whose value deviates from the defaults, it is mandatory to add `versionColumn`, `lastModifiedColumn`, and `creationTimeColumn` or they won't be used in the collection.

## Opening an Existing Document Collection with SODA for In-Database JavaScript

You can use the method `SodaDatabase.openCollection()` to open an existing document collection or to test whether a given name names an existing collection.

### Example 7-3 Opening an Existing Document Collection

This example opens the collection named `collectionName`. It is very important to check that the collection object returned by `SodaDatabase.openCollection()` is not null. Rather than throwing an error, the method will return a null value should the requested collection not exist.

```

export function openCollection(collectionName) {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // perform a lookup. If a connection cannot be found by that
    // name no exception nor error are thrown, but the resulting
    // collection object will be null
    const col = db.openCollection(collectionName);
    if (col === null) {
        throw `No such collection ${collectionName}`;
    }

    // do something with the collection
}

```

## Checking Whether a Given Collection Exists with SODA for In-Database JavaScript

You can use `SodaDatabase.openCollection()` to check for the existence of a given collection. It returns `null` if the collection argument does not name an existing collection; otherwise, it opens the collection having that name.

In [Example 7-3](#), if `collectionName` does not name an existing collection then `col` is assigned the value `null`.

## Discovering Existing Collections with SODA for In-Database JavaScript

You can use `SodaDatabase.getCollectionNames()` to fetch the names of all existing collections for a given `SodaDatabase` object.

If the number of collections is very large, you can limit the number of names returned. Additionally, the lookup can be limited to collections starting with a user-defined string as demonstrated by [Example 7-5](#).

### Example 7-4 Fetching All Existing Collection Names

This example prints the names of all existing collections using the method `getCollectionNames()`.

```
export function printCollectionNames() {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database  
    const db = connection.getSodaDatabase();  
  
    // loop over all collection names  
    const allCollections = db.getCollectionNames();  
    for (const col of allCollections) {  
        console.log(`- ${col}`);  
    }  
}
```

### Example 7-5 Filtering the List of Returned Collections

This example limits the results of `getCollectionNames()` by only printing the names of collections that begin with a user-defined string, `startWith`.

```
export function printSomeCollectionNames(numHits, startWith) {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database
```

```
const db = connection.getSodaDatabase();

// loop over all collection names
const allCollections = db.getCollectionNames(
  {
    limit: numHits,
    startsWith: startWith
  }
);
for (const col of allCollections) {
  console.log(`- ${col}`);
}
}
```

## Dropping a Document Collection with SODA for In-Database JavaScript

You use `SodaCollection.drop()` to drop an existing collection.

### Caution:

Do *not* use SQL to drop the database *table* that underlies a collection. Dropping a *collection* involves more than just dropping its database table. In addition to the documents that are stored in its table, a collection has *metadata*, which is also persisted in Oracle Database. Dropping the table underlying a collection does *not* also drop the collection metadata.

### Note:

Day-to-day use of a typical application that makes use of SODA does not require that you drop and re-create collections. But if you need to do that for any reason then this guideline applies.

Do *not* drop a collection and then re-create it with *different metadata* if there is any application running that uses the collection in any way. Shut down any such applications before re-creating the collection, so that all live SODA objects are released.

There is no problem just dropping a collection. Any read or write operation on a dropped collection raises an error. And there is no problem dropping a collection and then re-creating it with the same metadata. But if you re-create a collection with different metadata, and if there are any live applications using SODA objects, then there is a risk that a stale collection is accessed, and *no error is raised* in this case.

In SODA implementations that allow collection metadata caching, such as SODA for Java, this risk is increased if such caching is enabled. In that case, a (shared or local) cache can return an entry for a stale collection object even if the collection has been dropped.

 **Note:**

Commit all writes to a collection before using `SodaCollection.drop()`. For the method to succeed, all uncommitted writes to the collection must first be committed. Otherwise, an exception is raised.

**Example 7-6 Dropping a Collection**

This example drops collection `col`.

```
CREATE OR REPLACE MLE MODULE drop_col_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function openAndDropCollection(collectionName) {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // look the collection up
    const col = db.openCollection(collectionName);
    if (col === null) {
        throw `No such collection ${collectionName}`;
    }

    // drop the collection - POTENTIALLY DANGEROUS
    col.drop();
}
/
```

## Creating Documents with SODA for In-Database JavaScript

Creation of documents by SODA for In-Database JavaScript is described.

The `SodaDocument` class represents SODA documents. Although its focus is on JSON documents, it supports other content types as well. A `SodaDocument` stores both the actual document's contents as well as metadata.

JavaScript is especially well-suited to work with JSON by design, giving it an edge over other programming languages.

Here is an example of a simple JSON document:

```
// Create a JSON document (based on the HR.EMPLOYEES table for
employee 100)
const doc = {
    "employee_id": 100,
    "job_id": "AD_PRES",
```

```
"last_name": "King",  
"first_name": "Steven",  
"email": "SKING",  
"manager_id": null,  
"department_id": 90  
};
```

 **Note:**

In SODA, JSON content must conform to RFC 4627.

`SodaDocument` objects can be created in three ways:

- As a result of `sodaDatabase.createDocument()`. This is a proto-`SodaDocument` object usable for SODA insert and replace methods. The `SodaDocument` will have content and media type components set. Attributes like `createdOn` will not be defined. Optional attributes not specified when calling `SodaDocument.createDocument()` will not be defined either.
- As a result of a read operation from the database, such as calling `sodaOperation.getOne()`, or from `sodaDocumentCursor.getNext()` after a `sodaOperation.getCursor()` call. These return complete `SodaDocument` objects containing the document content and attributes, such as time stamps.
- As a result of `sodaCollection.insertOneAndGet()`, `sodaOperation.replaceOneAndGet()`, or `sodaCollection.insertManyAndGet()` methods. These return `SodaDocuments` that contain all attributes except the document content itself. They are useful for finding document attributes such as system generated keys, and versions of new and updated documents.

A document has these components:

- Key
- Content
- Creation time stamp
- Last-modified time stamp
- Version
- Media type ("application/json" for JSON documents)

### Example 7-7 Creating SODA Documents

```
export function createJSONDoc() {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database  
    const db = connection.getSodaDatabase();  
  
    // define a payload  
    const payload = {
```

```
    "employee_id": 100,
    "job_id": "AD_PRES",
    "last_name": "King",
    "first_name": "Steven",
    "email": "SKING",
    "manager_id": null,
    "department_id": 90
  };

  // create a SODA document using the default key
  const docDefaultKey = db.createDocument(payload);
  console.log(`
  -----
  SODA Document using default key
  content (select fields):
  - employee_id  ${docDefaultKey.getContent().employee_id}
  - job_id       ${docDefaultKey.getContent().job_id}
  - first name   ${docDefaultKey.getContent().first_name}
  media type:    ${docDefaultKey.mediaType}`
  );

  // create a SODA document using a custom key (requires that the
  // collection this document is inserted to uses a user-assigned
  // key)
  const docCustomKey = db.createDocument(
    payload,
    {
      key: "12345"
    }
  );

  // print details about the new SODA Document
  console.log(`
  -----
  SODA Document using custom key
  content (select fields):
  - employee_id  ${docCustomKey.getContent().employee_id}
  - job_id       ${docCustomKey.getContent().job_id}
  - first name   ${docCustomKey.getContent().first_name}
  key:           ${docCustomKey.key}
  media type:    ${docCustomKey.mediaType}`
  );
}
```

Creating `SodaDocument` instances as shown in this example is the exception rather than the norm. In most cases, developers use `SodaCollection.insertOne()` or `SodaCollection.insertOneAndGet()`. The use of `SodaCollection.insertOne()` is demonstrated in [Example 7-8](#).

## Inserting Documents into Collections with SODA for In-Database JavaScript

`SodaCollection.insertOne()` or a related call such as `sodaCollection.insertOneAndGet()` offers convenient ways to add documents to a collection. These methods create document keys automatically, unless the collection is configured with client-assigned keys and the input document provides the key.

`SodaCollection.insertOne()` simply inserts the document into the collection, whereas `SodaCollection.insertOneAndGet()` additionally returns a result document. The resulting document contains the document key and any other generated document components, except for the actual document's content (this is done to improve performance).

Both methods automatically set the values of the creation time stamp, last-modified time stamp, and version, unless the collection has been created with custom metadata. Custom metadata might not include all the default metadata. When querying attributes not defined by the collection a null value is returned.

### Note:

If the collection is configured with client-assigned document keys (which is not the default case), and the input document provides a key that identifies an existing document in the collection, then these methods throw an exception. If you want the input document to *replace* the existing document instead of causing an exception, see [Saving Documents into Collections with SODA for In-Database JavaScript](#).

### Example 7-8 Inserting a SODA Document into a Collection

This example demonstrates how to insert a document into a collection using `SodaCollection.insertOne()`.

```
export function insertOneExample() {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database  
    const db = connection.getSodaDatabase();  
  
    // create/open a SODA collection  
    const col = db.createCollection("MyJSONCollection");  
  
    // define a payload  
    const payload = {  
        "employee_id": 100,  
        "first_name": "Steven",  
        "last_name": "King"  
    };  
  
    // insert the document
```

```
    col.insertOne(payload);  
}
```

### Example 7-9 Inserting an Array of Documents into a Collection

This example demonstrates the use of `SodaCollection.insertMany()` to insert multiple documents with one command.

```
export function insertManyExample() {  
  // get a connection handle to the database session  
  const connection = oracledb.defaultConnection();  
  
  // get a SODA database  
  const db = connection.getSodaDatabase();  
  
  // create/open a SODA collection  
  const col = db.createCollection("MyJSONCollection");  
  
  // define a payload (an array of objects)  
  const payload = [  
    {  
      "employee_id": 100,  
      "first_name": "Steven",  
      "last_name": "King"  
    },  
    {  
      "employee_id": 101,  
      "first_name": "Neena",  
      "last_name": "Kochhar"  
    },  
    {  
      "employee_id": 102,  
      "first_name": "Lex",  
      "last_name": "De Haan"  
    },  
    {  
      "employee_id": 103,  
      "first_name": "Alexander",  
      "last_name": "Hunold"  
    },  
    {  
      "employee_id": 104,  
      "first_name": "Bruce",  
      "last_name": "Ernst"  
    },  
    {  
      "employee_id": 105,  
      "first_name": "David",  
      "last_name": "Austin"  
    }  
  ]  
  
  // insert the document
```



```
    col.insertMany(payload);  
}
```

## Saving Documents into Collections with SODA for In-Database JavaScript

You use `SodaCollection.save()` and `saveAndGet()` to save documents into collections.

These methods are similar to methods `insertOne()` and `insertOneAndGet()` except that, if the collection is configured with client-assigned document keys, and the input document provides a key that already identifies a document in the collection, then the input document *replaces* the existing document. In contrast, methods `insertOne()` and `insertOneAndGet()` throw an exception in that case.

### Note:

By default, collections are configured with automatically generated document keys. Therefore, for a default collection, methods `save()` and `saveAndGet()` are equivalent to methods `insertOne()` and `insertOneAndGet()`, respectively.

### Example 7-10 Saving a Document into a Collection

This example shows how to use `SodaCollection.saveAndGet()`. The JavaScript code stores a SODA document in a collection defined with custom metadata to ensure `save()` and `saveAndGet()` work as described. The key column specifically is user-managed, which is why you see the `SodaDocument` constructor mention a key.

```
CREATE OR REPLACE MLE MODULE save_doc_mod  
LANGUAGE JAVASCRIPT AS  
  
import oracledb from "mle-js-oracledb";  
  
export function saveJSONDoc() {  
  
    // get a connection handle to the database session  
    const connection = oracledb.defaultConnection();  
  
    // get a SODA database  
    const db = connection.getSodaDatabase();  
  
    // create/open a collection using custom metadata  
    const col = db.openCollection("myCustomCollection");  
    if ( col === null ) {  
        throw `myCustomCollection does not exist`;  
    }  
  
    // create the SODA document, use the employee_id as its key  
    let docCustomKey = db.createDocument(  
        {  
            "employee_id": 100,  
            "job_id": "AD_PRES",  
            "last_name": "King",  

```

```
        "first_name": "Steven",
        "email": "SKING",
        "manager_id": null,
        "department_id": 90
    },
    {
        "key": "100"
    }
);

// insert the document into the custom collection
let savedDoc = col.saveAndGet(docCustomKey);

// get some meta information about the new document
console.log(`Document saved for the 1st time:
- department id: ${docCustomKey.getContent().department_id}
- key:          ${savedDoc.key}
- version:      ${savedDoc.version}
- last modified: ${savedDoc.lastModified}
- created on:   ${savedDoc.createdOn}`);

// correct the previous mistake - the document should have
// been inserted with a department_id of 30
// - create the new document (important to use the same key)
docCustomKey = db.createDocument(
    {
        "employee_id": 100,
        "job_id": "AD_PRES",
        "last_name": "King",
        "first_name": "Steven",
        "email": "SKING",
        "manager_id": null,
        "department_id": 30
    },
    {
        "key": "100"
    }
);

// - update the existing document
savedDoc = col.saveAndGet(docCustomKey);

// - show the changed metadata. Cannot refer to the content
// as it is not returned by saveAndGet() for performance
// reasons
console.log(`Updated document saved successfully:
- department id: ${docCustomKey.getContent().department_id}
- key:          ${savedDoc.key}
- version:      ${savedDoc.version}
- last modified: ${savedDoc.lastModified}
- created on:   ${savedDoc.createdOn}`);
}
/
```

After the initial document has been saved to the collection, it turns out that the value for the document's `department_id` was wrong and needs correcting. The mistake is corrected and the document saved again, overwriting the previous contents and effectively setting the `department_id` to the correct value of 30.

## SODA for In-Database JavaScript Read and Write Operations

The primary way you specify read and write operations (other than insert and save) is to use methods provided by the `SodaOperation` class. You can chain together `SodaOperation` methods to specify read or write operations against a collection.

*Nonterminal* `SodaOperation` methods return the same object on which they are invoked, allowing them to be chained together.

A *terminal* `SodaOperation` method always appears at the end of a method chain to execute the operation.



### Note:

A `SodaOperation` object is an internal object. You should not directly modify its properties.

Unless the `node-oracledb` documentation for a method says otherwise, you can chain together any nonterminal methods and you can end the chain with any terminal method. However, not all combinations make sense. For example, it does not make sense to chain method `version()` together with a method that does not uniquely identify the document, such as `keys()`.

**Table 7-1 Overview of Nonterminal Methods for Read Operations**

Method	Description
<code>key()</code>	Find a document that has the specified document key.
<code>keys()</code>	Find documents that have the specified document keys.
<code>filter()</code>	Find documents that match a filter specification (a query-by-example expressed in JSON).
<code>version()</code>	Find documents that have the specified version. This is typically used with <code>key()</code> .
<code>headerOnly()</code>	Exclude document content from the result.
<code>skip()</code>	Skip the specified number of documents in the result.
<code>limit()</code>	Limit the number of documents in the result to the specified number.

**Table 7-2 Overview of Terminal Methods for Read Operations**

Method	Description
<code>getOne()</code>	Create and execute an operation that returns at most one document. For example, an operation that includes an invocation of nonterminal method <code>key()</code> .

**Table 7-2 (Cont.) Overview of Terminal Methods for Read Operations**

Method	Description
<code>getCursor()</code>	Get a cursor over read operation results.
<code>count()</code>	Count the number of documents found by the operation.
<code>getDocuments()</code>	Gets an array of documents matching the query criteria.

**Table 7-3 Overview of Terminal Methods for Write Operations**

Method	Description
<code>replaceOne()</code>	Replace one document.
<code>replaceOneAndGet()</code>	Replace one document and return the result document.
<code>remove()</code>	Remove documents from a collection.

 **See Also:**

- [Node-oracledb Documentation](#) for more details about the `SodaOperations` class.
- [SODA Restrictions \(Reference\)](#) for information about SODA restrictions.

## Finding Documents in Collections with SODA for In-Database JavaScript

To find documents in a collection, you invoke `SodaCollection.find()`. It creates and returns a `SodaOperation` object which is used via method chaining with nonterminal and terminal methods.

To execute the query, obtain a cursor for its results by invoking `SodaOperation.getCursor()`. Then use the cursor to visit each document in the result list. This is illustrated by [Example 7-1](#) and other examples. It is important not to forget to close the cursor, to save resources.

However, this is not the typical workflow when searching for documents in a collection. It is more common to chain multiple methods provided by the `SodaOperation` class together.

### Example 7-11 Finding a Document by Key

This example shows how to look up a document by its key using the methods `find()`, `key()`, and `getOne()`.

There is an assumption that `customCollection` has been created as outlined in [Example 7-2](#).

```
CREATE OR REPLACE MLE MODULE find_doc_mod
LANGUAGE JAVASCRIPT AS
```

```
import oracledb from "mle-js-oracledb";

export function findDocByKey() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open a collection in preparation of a document
    // lookup
    const col = db.openCollection("myCustomCollection");
    if (col === null) {
        throw `myCustomCollection does not exist`;
    }

    try {
        // perform a lookup of a document with key "100"
        const doc = col.find().key("100").getOne();
        console.log(`
            document found for key ${doc.key}
            contents: ${doc.getContentAsString()}`
        );
    } catch (err) {
        throw `No document found in 'myCustomCollection' with key 100`;
    }
}
/
```

**Note:**

Keys need to be enclosed in double quotation marks even if they should be in numeric format.

In case the search for a given key fails, the database throws an ORA-01403 (no data found) exception. It is good practice to handle exceptions properly. In this example, the caller of the function has the responsibility to ensure the error is trapped and dealt with according to the industry's best-known methods.

**Example 7-12 Looking up Documents Using Multiple Keys**

This example uses the methods `find()`, `keys()`, `getCursor()`, and `getNext()` to search for multiple keys provided in an array.

```
export function findDocByKeys() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();
```

```
// open a collection in preparation of a document
// lookup
const col = db.openCollection("myCustomCollection");
if (col === null) {
  throw `myCustomCollection does not exist`;
}

try {
  // perform a lookup of a document with keys ["100","101"]
  const docCursor = col.find().keys(["100", "101"]).getCursor();

  let doc
  while ((doc = docCursor.getNext())) {
    console.log(`
      document found for key ${doc.key}
      contents: ${doc.getContentAsString}`
    );
  }
  docCursor.close();
} catch (err) {
  throw `No document found in 'myCustomCollection' with either
key`;
}
}
```

Rather than failing with an ORA-1403 (no data found exception), the `find()` operation simply doesn't return any data for a key not found in a collection. If none of the keys are found, nothing is returned.

### Example 7-13 Using a QBE to Filter Documents in a Collection

This example uses `filter()` to locate documents in a collection. The nonterminal `SodaOperation.filter()` method provides a powerful way to filter JSON documents in a collection, allowing for complex document queries and ordering of JSON documents. Filter specifications can include comparisons, regular expressions, logical and spatial operators, among others.

The search expression defined in `filterCondition` matches all employees with an employee ID greater than 110 working in department 30.

```
export function findDocByFiltering() {
  // get a connection handle to the database session
  const connection = oracledb.defaultConnection();

  // get a SODA database
  const db = connection.getSodaDatabase();

  // open a collection in preparation of a document
  // lookup. This particular collection contains all the
  // rows from the HR.employees table converted to SODA
  // documents
  const col = db.openCollection("employees_collection");
  if (col === null) {
    throw `employees_collection does not exist`;
  }
}
```

```

    }

    // find all employees with an employee_id > 110 working
    // in department 30
    const filterCondition = {
      "employee_id": { "$gt": 110 },
      "department_id": "30"
    }

    try {

      // perform the lookup operation using the QBE
      const docCursor = col.find().filter(filterCondition).getCursor();
      let doc;
      while (( doc = docCursor.getNext())) {
        console.log(`
          -----
          document found matching the search criteria
          - key:           ${doc.key}
          - employee id:   ${doc.getContent().employee_id}
          - department ID: ${doc.getContent().department_id}
          - name:          ${doc.getContent().last_name}`
        );
      }

      docCursor.close();
    } catch (err) {
      throw `No document found in 'myCustomCollection' with either key`;
    }
  }
}

```

#### See Also:

- *Oracle Database Introduction to Simple Oracle Document Access (SODA)* for an introduction to SODA filter specifications
- *Oracle Database Introduction to Simple Oracle Document Access (SODA)* for reference information about SODA filter specifications

#### Example 7-14 Using skip() and limit() in a Pagination Query

If the number of rows becomes too large, you may choose to paginate and or limit the number of documents returned. This example demonstrates using `skip()` and `limit()` in this type of circumstance.

```

export function paginationExample() {
  // get a connection handle to the database session
  const connection = oracledb.defaultConnection();

  // get a SODA database
  const db = connection.getSodaDatabase();

```

```

// open a collection in preparation of a document
// lookup. This particular collection contains all the
// rows from the HR.employees table converted to SODA
// documents
const col = db.openCollection("employees_collection");
if (col === null) {
    throw `employees_collection does not exist`;
}

// find all employees with an employee_id > 110 working
// in department 80
const filterCondition = {
    "employee_id": { "$gt": 110 },
    "department_id": "80"
}

try {

    // perform the lookup operation using the QBE, skipping the
first
    // 10 documents and limiting the result set to 10 documents
    const docCursor =

col.find().filter(filterCondition).skip(10).limit(10).getCursor();
    let doc
    while (( doc = docCursor.getNext())) {
        console.log(`
            -----
            document found matching the search criteria
            - key:          ${doc.key}
            - employee id:  ${doc.getContent().employee_id}`
        );
    }

    docCursor.close();
} catch (err) {
    throw `No document found in 'myCustomCollection' with either
key`;
}
}

```

### Example 7-15 Specifying Document Versions

This example uses the nonterminal `version()` method to specify a particular document version. This is useful for implementing optimistic locking, when used with the terminal methods for write operations.

```

export function versioningExample() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

```



```
// open a collection in preparation of a document
// lookup
const col = db.openCollection("myCustomCollection");
if (col === null) {
    throw `myCustomCollection does not exist`;
}

try {
    // perform a lookup of a document with key "100" and version "v1"
    const doc = col.find().key("100").version("v1").getOne();
    console.log(`
        document found for key ${doc.key}
        contents: ${doc.getContentAsString()}`
    );
} catch (err) {
    throw `No document found for key 100 and version "v1"`;
}
}
```

### Example 7-16 Counting the Number of Documents Found

This example shows how to count the number of documents found in a collection using the `find()`, `filter()`, and `count()` methods. The `filter()` expression limits the result to all employees working in department 30.

```
export function countingExample() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open a collection in preparation of a document lookup
    const col = db.openCollection("employees_collection");
    if (col === null) {
        throw `employees_collection does not exist`;
    }

    try {
        // perform a lookup operation identifying all employees working
        // in department 30 limiting the result to headers only
        const filterCondition = {"department_id": "30" };
        const numDocs = col.find().filter(filterCondition).count();
        console.log(`there are ${numDocs} documents matching the filter`);
    } catch (err) {
        throw `No document found in 'employees_collection' matching the
filter`;
    }
}
```

## Replacing Documents in a Collection with SODA for In-Database JavaScript

To replace the content of one document in a collection with the content of another, you start by looking up the document to be modified using its key. Because `SodaOperation.key()` is a nonterminal operation, the easiest way to replace the contents is to chain `SodaOperation.key()` to `SodaOperation.replaceOne()` or `SodaOperation.replaceOneAndGet()`.

`SodaOperation.replaceOne()` merely replaces the document, whereas `SodaOperation.replaceOneAndGet()` replaces it and provides the resulting new document to the caller.

Both methods update the values of the last modified time stamp and the version. Replacement does not change the document key or the creation time stamp.

The difference between `SodaOperation.replace()` and `SodaOperation.save()` is that the latter performs an insert in case the key doesn't already exist in the collection. The replace operation requires an existing document to be found by the lookup via the `SodaOperation.key()` method.



### Note:

Some version-generation methods, including the default method, generate hash values of the document content. In such a case, if the document content does not change then neither does the version.

### Example 7-17 Replacing a Document in a Collection and Returning the Result Document

This example shows how to replace a document in a collection, returning a reference to the changed document.

```
CREATE OR REPLACE MLE MODULE rep_ret_doc_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function replaceExample() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open myCustomCollection
    const col = db.openCollection("myCustomCollection");
    if ( col === null ) {
        throw "'myCustomCollection' does not exist";
    }
}
```

```

// create the changed SODA document, change department_id to 80
const newDoc = db.createDocument(
  {
    "employee_id": 100,
    "job_id": "AD_PRES",
    "last_name": "King",
    "first_name": "Steven",
    "email": "SKING",
    "manager_id": null,
    "department_id": 80
  }
);

// perform a lookup of the document about to be changed
try {
  const resultDoc = col.find().key("100").replaceOneAndGet(newDoc);

  // print some metadata (note that content is not returned for
  // performance reasons)
  console.log(`Document updated successfully:
- key:          ${resultDoc.key}
- version:     ${resultDoc.version}
- last modified: ${resultDoc.lastModified}
- created on:  ${resultDoc.createdOn}`);
} catch (err) {
  throw err;
}
}
/

```



#### Note:

Trying to read the changed contents will result in an error as the actual document's contents aren't returned, for performance reasons.

## Removing Documents from a Collection with SODA for In-Database JavaScript

Removing documents from a collection is similar to replacing. The first step is to perform a lookup operation, usually based on the document's key or by using a search expression in `SodaOperation.filter()`. The call to `SodaOperation.remove()` is a terminal operation, in other words the last operation in the chain.

### Example 7-18 Removing a Document from a Collection Using a Document Key

This example removes the document whose document key is "100".

```

CREATE OR REPLACE MLE MODULE rm_doc_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

```

```
export function removeByKey() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open myCustomCollection
    const col = db.openCollection("myCustomCollection");
    if ( col === null ) {
        throw "'myCustomCollection' does not exist";
    }

    // perform a lookup of the document about to be removed and
    // ultimately remove it.
    const result = col.find().key("100").remove();
    if ( result.count === 0 ) {
        throw "Document was not deleted - is this an invalid key?"
    }
}
/
```

#### Example 7-19 Removing JSON Documents from a Collection Using a Filter

This example uses a filter to remove the JSON documents whose `department_id` is 70. It then prints the number of documents removed.

```
export function removeByFilter() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open employees_collection
    const col = db.openCollection("employees_collection");
    if ( col === null ) {
        throw "'employees_collection' does not exist";
    }

    // perform a lookup based on a filter expression and remove the
    // documents matching the filter
    const result = col.find().filter({"department_id": "70"}).remove();

    return result.count;
}
```

## Indexing the Documents in a Collection with SODA for In-Database JavaScript

Indexes can speed up data access, regardless of whether you use the NoSQL style SODA API or a relational approach. You index documents in a SODA collection using `SodaCollection.createIndex()`. Its `IndexSpec` parameter is a textual JSON index specification.

Existing indexes can be dropped using `SodaCollection.dropIndex()`.

A JSON search index is used for full-text and ad hoc structural queries, and for persistent recording and automatic updating of JSON data-guide information.

### See Also:

- *Oracle Database Introduction to Simple Oracle Document Access (SODA)* for an overview of using SODA indexing
- *Oracle Database Introduction to Simple Oracle Document Access (SODA)* for information about SODA index specifications
- *Oracle Database JSON Developer's Guide* for information about JSON search indexes
- *Oracle Database JSON Developer's Guide* for information about persistent data-guide information as part of a JSON search index

### Example 7-20 Creating a B-Tree Index for a JSON Field with SODA for In-Database JavaScript

This example creates a B-tree non-unique index for numeric field `department_id` of the JSON documents in collection `employees_collection`.

```
CREATE OR REPLACE MLE MODULE b_tree_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function createBTreeIndex() {
  // get a connection handle to the database session
  const connection = oracledb.defaultConnection();

  // get a SODA database
  const db = connection.getSodaDatabase();

  // open the collection
  const col = db.openCollection("employees_collection");
  if ( col === null ) {
    throw "'employees_collection' does not exist";
  }

  const indexSpec = {
```

```

    "name": "departments_idx",
    "fields": [
      {
        "path": "department_id",
        "datatype": "number",
        "order": "asc"
      }
    ]
  };

  col.createIndex(indexSpec);

  console.log(`B-Tree index successfully created`);
}
/

```

### Example 7-21 Creating a JSON Search Index with SODA for In-Database JavaScript

This example shows how to create a JSON search index for indexing the documents in collection `employees_collection`. It can be used for ad hoc queries and full-text search (queries using QBE operator `$contains`). It automatically accumulates and updates data-guide information about your JSON documents (aggregate structural and type information). The index specification has only field `name` (no *field* fields unlike the B-tree index in [Example 7-20](#)).

```

export function createSearchIndex() {

  // get a connection handle to the database session
  const connection = oracledb.defaultConnection();

  // get a SODA database
  const db = connection.getSodaDatabase();

  // open the collection
  const col = db.openCollection("employees_collection");
  if ( col === null ) {
    throw "'employees_collection' does not exist";
  }

  const indexSpec = {
    "name": "SEARCH_AND_DATA_GUIDE_IDX",
    "dataguide": "on",
    "search_on": "text_value"
  }

  col.createIndex(indexSpec);

  console.log(`Search & Data Guide index successfully created`);
}

```

If you only wanted to speed up ad hoc (search) indexing, you should specify a value of "off" for field `dataguide`. The `dataguide` indexing feature can be turned off in the same way if it is not required.

### Example 7-22 Dropping an Index with SODA for In-Database JavaScript

This example shows how you can drop an existing index on a collection using `SodaCollection.dropIndex()` and the `force` option.

```
export function dropIndex(indexName) {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open the collection
    const col = db.openCollection("employees_collection");
    if ( col === null ) {
        throw "'employees_collection' does not exist";
    }

    // drop the index
    const result = col.dropIndex(indexName, {"force": true});
    if (! result.dropped ) {
        throw `Could not drop SODA index ${indexName}`;
    }
}
```

`SodaCollection.dropIndex()` returns a result object containing a single field: `dropped`. Its value is `true` if the index has been dropped, otherwise its value is `false`. The method succeeds either way.

An optional parameter object can be supplied to the method. Setting `force` to `true` forces dropping of a JSON index if the underlying Oracle Database domain index does not permit normal dropping.

## Getting a Data Guide for a Collection with SODA for In-Database JavaScript

A data guide is a summary of the structural and type information contained in a set of JSON documents. It records metadata about the fields used in those documents. They provide great insights into JSON documents and are invaluable for getting an overview of a data set.

You can create a data guide using `SodaCollection.getDataGuide()`. To get a data guide in SODA, the collection must be JSON-only and have a JSON search index where the "dataguide" option is "on". Data guides are returned from `sodaCollection.getDataGuide()` as JSON content in a `SodaDocument`. The data guide is inferred from the collection as it currently is. As a collection grows and documents change, a new data guide is returned each subsequent time `getDataGuide()` is called.

### Example 7-23 Generating a Data Guide for a Collection

This example gets a data guide for the collection `employees_collection` using the method `getDataGuide()` and then prints the contents as a string using the method `getContentAsString()`.

```
CREATE OR REPLACE MLE MODULE data_guide_mod
LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function createDataGuide() {

    // get a connection handle to the database session
    const connection = oracledb.defaultConnection();

    // get a SODA database
    const db = connection.getSodaDatabase();

    // open the collection
    const col = db.openCollection("employees_collection");
    if ( col === null ) {
        throw "'employees_collection' does not exist";
    }

    // generate a Data Guide
    const doc = col.getDataGuide();
    console.log(doc.getContentAsString());
}
/
```

## Handling Transactions with SODA for In-Database JavaScript

Unlike the client-side JavaScript SQL driver, the MLE JavaScript SQL driver does not provide an `autoCommit` feature. You need to commit or roll your transactions back, either in the PL/SQL layer in case of module calls, or directly in the JavaScript code by calling `connection.commit()` or `connection.rollback()`.

### ▲ Caution:

If any uncommitted operation raises an error, and you do not explicitly roll back the transaction, the incomplete transaction might leave the relevant data in an inconsistent state (uncommitted, partial results).

## Summary Example of Using SODA for In-Database JavaScript

An end-to-end example is included to demonstrate using SODA for In-Database JavaScript from start to finish.



**Example 7-24 Use SODA for In-Database JavaScript**

This example includes the following steps to use SODA for in-database JavaScript end-to-end:

1. Define a JavaScript module to interact with the `employeesCol` collection.
2. Create a JavaScript function to persist a JSON document in the collection.
3. Define another JavaScript function to list all the employees found in the collection.
4. Provide a call specification to each function within a PL/SQL package.

**Define the JavaScript Module**

This module makes use of the variables available in the global scope to limit the amount of coding required.

```
CREATE OR REPLACE MLE MODULE employees_module
LANGUAGE JAVASCRIPT AS

/// <reference types="mle-js" />

const colName = "employeesCol";

/**
 * add an employee document to the employeesCol collection
 *
 * @param {json} employeeDoc - the new employee document to be added
 */
export function addEmployee(employeeDoc) {

    // this code example uses the SODA database object (soda)
    // available in the global scope
    const col = soda.createCollection(colName);
    col.insertOne(employeeDoc);
}

/**
 * return a JSON document containing all the employees from the collection
 *
 * @returns {json} a document listing employee_id, last name, and
    department_name
 */
export function findAllEmployees() {

    // this array will contain all the employee documents
    // shortened to include employee ID, last name and
    // department name. It is safer to assume the array is
    // empty at first
    let employeeList = [];

    const col = soda.openCollection(colName);
    if ( col === null ) {
        return employeeList;
    }

    // iterate over all documents in the collection
```

```

const allDocs = col.find().getDocuments();
for ( let doc of allDocs ) {
  const payload = doc.getContent();
  // add the relevant fields to a JSON document before
  // pushing it to the employeeList array
  const employeeDetail = {
    "employee_id": payload.employee_id,
    "last_name": payload.last_name,
    "department_name": payload.department_name
  };
  employeeList.push(employeeDetail);
};

// return the list of employees found in the collection
return employeeList;
}
/

```

### Provide a Call Specification

Call specifications for both functions defined in the JavaScript module `employees_module` are provided by the following package. Note that the package is defined with invoker's rights rather than definer's rights. The invoker of the package must be granted the `SODA_APP` role or else an error is thrown.

```

CREATE OR REPLACE PACKAGE employees_pkg
AUTHID current_user
AS

  PROCEDURE add_employee(employee JSON)
  AS MLE MODULE employees_module
  SIGNATURE 'addEmployee';

  FUNCTION find_all_employees
  RETURN JSON
  AS MLE MODULE employees_module
  SIGNATURE 'findAllEmployees';

END employees_pkg;
/

```

### Add Sample Data to the Collection

The following anonymous PL/SQL block converts two rows from `HR.EMPLOYEES` to a JSON document and inserts them into the collection by invoking the JavaScript code externalized by the call specification created earlier.

```

DECLARE
  l_employee JSON;
BEGIN
  SELECT
    JSON(
      'employee_id' IS e.employee_id,
      'first_name' IS e.first_name,

```

```
        'last_name' IS e.last_name,  
        'email' IS e.email,  
        'phone_number' IS e.phone_number,  
        'hire_date' IS e.hire_date,  
        'job_id' IS e.job_id,  
        'salary' IS e.salary,  
        'commission_pct' IS e.commission_pct,  
        'manager_id' IS e.manager_id,  
        'department_name' IS d.department_name  
    }  
INTO  
    l_employee  
FROM  
    hr.employees e  
    JOIN hr.departments d ON (e.department_id = d.department_id)  
WHERE  
    e.employee_id = 100;  
  
employees_pkg.add_employee(l_employee);  
  
SELECT  
    JSON(  
        'employee_id' IS e.employee_id,  
        'first_name' IS e.first_name,  
        'last_name' IS e.last_name,  
        'email' IS e.email,  
        'phone_number' IS e.phone_number,  
        'hire_date' IS e.hire_date,  
        'job_id' IS e.job_id,  
        'salary' IS e.salary,  
        'commission_pct' IS e.commission_pct,  
        'manager_id' IS e.manager_id,  
        'department_name' IS d.department_name  
    )  
INTO  
    l_employee  
FROM  
    hr.employees e  
    JOIN hr.departments d ON (e.department_id = d.department_id)  
WHERE  
    e.employee_id = 101;  
  
employees_pkg.add_employee(l_employee);  
END;  
/
```

### Find All Employees in the Collection

Finally, `EMPLOYEES_PKG.find_all_employees()` can be used to provide a shortened list of employees stored in the collection.

```
SELECT  
    JSON_SERIALIZE(  
        employees_pkg.find_all_employees  
    )  
    PRETTY
```

```
) AS all_employees;  
/
```

**Result:**

ALL\_EMPLOYEES

```
-----  
[  
  {  
    "employee_id" : 100,  
    "last_name" : "King",  
    "department_name" : "Executive"  
  },  
  {  
    "employee_id" : 101,  
    "last_name" : "Yang",  
    "department_name" : "Executive"  
  }  
]
```

# 8

## Post-Execution Debugging of MLE JavaScript Modules

The ability to easily debug code is central to a good developer experience. MLE provides the option to perform post-execution debugging on your JavaScript source code in addition to standard print debugging.

Post-execution debugging allows efficient collection of runtime state during program execution. Once execution of the code has completed, the collected data can be used to analyze program behavior and discover bugs that require attention. To perform post-execution debugging, you provide a debug specification that identifies the debugging information to be collected. A debug specification is a collection of debugpoints, each of which specify a location in the source code where debug information should be collected, as well as what information to collect. Debugpoints can be conditional or unconditional.

### Note:

Post-execution debugging can only be applied to JavaScript code that is deployed as MLE modules. This debugging feature cannot currently be used when deploying code via dynamic execution.

### Note:

MLE built-in modules such as the MLE JavaScript driver and MLE bindings cannot be debugged via post-execution debugging. An attempt to debug a built-in module will cause an `ORA-04162` error to be raised.

For more information about MLE built-in modules, see [Server-Side JavaScript API Documentation](#).

Module debugpoints apply to all executions of the module code, including via MLE call specifications, as well as via module import, whether from a dynamic MLE source or from another MLE module. Once enabled, a debug specification is active either until it is disabled or replaced by a new debug specification, or until the session ends.

### Topics

- [Specifying Debugpoints](#)  
Debugpoints are specified using a JSON document encoded in the database character set.
- [Managing Debugpoints](#)  
Debugging can be enabled in a session by calling the procedure `dbms_mle.enable_debugging` with a debug specification.

- [Analyzing Debug Output](#)  
Output from debugpoints is stored in the Java Profiler Heap Dump version 1.0.2 format.
- [Error Handling in MLE](#)  
Errors encountered during the execution of MLE JavaScript code are reported as database errors.

## Specifying Debugpoints

Debugpoints are specified using a JSON document encoded in the database character set.

Each debugpoint has the following elements:

- A **location** in the source code where the information is collected
- An **action** that describes what information to collect
- An optional **condition** that controls when debug information should be collected

### Example 8-1 JSON Template for Specifying Debugpoints

```
{  
  at: <location-spec>,  
  action: [ <action-spec>, ... ],  
  [ condition: <condition-spec> ]  
}
```

- [Debugpoint Locations](#)  
Debugpoint locations are specified via the line number in the source code of the application being debugged.
- [Debugpoint Actions](#)  
MLE post-execution debugging supports two kinds of actions: `watch` and `snapshot`.
- [Debugpoint Conditions](#)  
Both `watch` and `snapshot` can be controlled via conditions specified in the `condition` field.

## Debugpoint Locations

Debugpoint locations are specified via the line number in the source code of the application being debugged.

The name of the MLE module to be debugged is specified via the `name` field and the location within the module where debug information is to be collected is specified via the `line` field. [Example 8-4](#) provides an example JSON document with sample values.

## Debugpoint Actions

MLE post-execution debugging supports two kinds of actions: `watch` and `snapshot`.

The `watch` action allows you to log the value of the variable named in the `id` field. The optional `depth` field provides you with control over the depth to which values of composite type variables are logged.

The `snapshot` action logs the stack trace at the point the `snapshot` action is invoked, along with the values of the local variables in each stack frame. A higher cost of performance is required by `snapshot` compared with `watch` but it provides a greater depth of information. As with the `watch` action, the optional `depth` field can be used to control the depth of logging for each variable. The `depth` parameter for the `snapshot` action applies to all variables captured by the action.

More precisely, the `depth` parameter controls how deeply you traverse the object tree in order to capture the value of a variable. For example, consider the following variable with nested objects:

```
let x = {
  a: {
    val: 42
  },
  b: 3.14
};
```

If the `depth` field is defined as 2, the object tree would be traversed and the value of the nested object `a` would be captured, which in this case is 42. If `depth` is specified as 1, the traversal would end at the first level, which would produce the following results:

```
x = {
  "a": {
    "<unreachable>": true
  };
  "b": 3.14
}
```

The `framesLimit` field provides you with control over the number of stack frames to be logged. The default is to log all stack frames. `framesLimit` only applies to `snapshot`. Take, for example, a call hierarchy where `a()` calls `b()` and `b()` calls `c()`. If you take a snapshot in `c()`, `framesLimit=1` would only capture the bottom-most stack frame (in this case, `c()`), `framesLimit=2` would capture the bottom two (in this case, `c()` and `b()`), and so on.

### Example 8-2 JSON Template for Specifying Watch Action

To watch a variable, `type` must be set to `watch`. The `id` parameter is used to identify the variable or variables to watch and must be provided as either a string or an array of strings. The `depth` parameter is optional and is defined by a number.

```
actions: [
  { type: "watch",
    id: <string[]> | <string>,
    [depth : <number>] }
]
```

**Example 8-3 JSON Template for Specifying Snapshot Action**

To use the `snapshot` action, the `type` parameter must be set to `snapshot`. The `framesLimit` and `depth` fields are optionally provided as numbers.

```
actions: [  
  { type: "snapshot",  
    [framesLimit: <number>],  
    [depth : <number>] }  
]
```

## Debugpoint Conditions

Both `watch` and `snapshot` can be controlled via conditions specified in the `condition` field.

The expression is evaluated in the context of the application at the location specified in the debugpoint and the associated action is triggered only if the expression evaluates to `true`.

There are no restrictions on the type of expression that can be included in the `condition` field. You must ensure that evaluating any expressions does not alter the behavior of the program being debugged.

**Example 8-4 Watching a Variable in an MLE Module**

The following code specifies a debugpoint for a module, `myModule1`, with two associated actions. A `watch` action for variable `x` with the logging depth restricted to 3, and a `watch` action for variable `y` with no restrictions on logging depth. The debugpoint also has an associated `condition` so that the debugpoint actions only trigger if the condition (`x.id>100`) is met.

```
{  
  at : {  
    name : "myModule1",  
    line : 314  
  },  
  actions : [  
    { type : "watch", id : "x", depth : 3 },  
    { type: "watch", id : "y" }  
  ],  
  condition : 'x.id > 100'  
}
```

## Managing Debugpoints

Debugging can be enabled in a session by calling the procedure `dbms_mle.enable_debugging` with a debug specification.

In addition to an array of debugpoints, specified via the `debugpoints` field, a debug specification includes a version identifier, specified via the `version` field. The `version` field must be set to the value `"1.0"`. Debug specifications can include debugpoints for multiple MLE modules.



 **Note:**

Debug specifications require module names to be provided in the same case that they are stored in the dictionary. By default, module names are stored in uppercase unless the name is enclosed in double-quotation marks during module creation.

The procedure `dbms_mle.enable_debugging` also accepts a BLOB sink to which the debug output is written.

After the call to `dbms_mle.enable_debugging`, all debugpoints included in the debug specification are active. Every time one of the debugpoints is hit, the associated debug information is logged. The debug information is written out to the BLOB sink when control passes from MLE back to PL/SQL at the latest but could be written out in part or in full before this point:

- For dynamic MLE evaluations, control passes from MLE to PL/SQL when the call to `dbms_mle.eval` returns.
- For MLE call specifications, control passes from MLE to PL/SQL when the call to the MLE call specification returns.

The installed debugpoints are active for all executions of the MLE modules regardless of which user's privileges the MLE code executes with.

Calling `dbms_mle.enable_debugging` again in the same session replaces the existing set of debugpoints. Debugpoints remain active until either the session ends or the user disables debugging explicitly by calling `dbms_mle.disable_debugging`.

### Example 8-5 Enabling Debugging of an MLE Module

The debug specification in this example references the module `count_module`, created at the beginning of [Example 5-4](#), and module `in_out_example_mod`, created in [Example 5-6](#).

```
DECLARE
  debugspec json;
  sink blob;
BEGIN
  debugspec:= json(
    {
      "version": "1.0",
      "debugpoints": [
        {
          "at": {
            "name": "COUNT_MODULE",
            "line": 7
          },
          "actions": [
            { "type": "watch", id: "myCounter", depth: 1 }
          ],
          "condition": "myCounter > 0"
        },
        {
          "at": {
            "name": "IN_OUT_EXAMPLE_MOD",
            "line": 16
```

```
        },
        "actions": [
            { "type": "snapshot" }
        ],
    }
]
}
');
dbms_lob.createtemporary(sink, false);
dbms_mle.enable_debugging(debugspec, sink);
--run application to debug
END;
/
```

- [Debugging Security Considerations](#)  
Users must either own the MLE modules being debugged or have debugging privileges to it. This is necessary because the debugging feature allows you to observe runtime state of the MLE code.
- [COLLECT DEBUG INFO Privilege for MLE Modules](#)  
The `COLLECT DEBUG INFO` object privilege for MLE modules controls whether a user who does not own a module, but has `EXECUTE` privilege, can still perform debugging on said module.

## Debugging Security Considerations

Users must either own the MLE modules being debugged or have debugging privileges to it. This is necessary because the debugging feature allows you to observe runtime state of the MLE code.

Additionally, because the `condition` field allows you to execute arbitrary code, this could potentially be used to alter the runtime behavior of the code being debugged. Concretely, you can use post-execution debugging on an MLE module if,

- You own the MLE module, or
- You have the `COLLECT DEBUG INFO` object privilege on the MLE module.

Privileges are checked every time code in an MLE module with one or more active debugpoints is executed. If you attempt to install debugpoints without the necessary privileges, an `ORA-04164` error will be raised.

If an `ORA-04164` is encountered, either

- The user who installed the debugpoints must be granted the `COLLECT DEBUG INFO` privilege on the module in question, or
- The debugpoints for the module must be disabled to continue executing code in the module in that session.

## COLLECT DEBUG INFO Privilege for MLE Modules

The `COLLECT DEBUG INFO` object privilege for MLE modules controls whether a user who does not own a module, but has `EXECUTE` privilege, can still perform debugging on said module.

For instance, consider an MLE module, `ModuleA`, owned by user `W`. User `W` creates an invoker's rights call specification for a function in `ModuleA` and grants `EXECUTE` on this call specification on user `V`. For user `V` to have the ability to debug the code in `ModuleA` when calling this call specification, user `W` must also grant them the `COLLECT DEBUG INFO` privilege on `ModuleA`.

User `W` could use the following statement to grant user `V` the privilege to debug `ModuleA`:

```
GRANT COLLECT DEBUG INFO ON ModuleA TO V;
```

The `COLLECT DEBUG INFO` privilege can subsequently be revoked if needed:

```
REVOKE COLLECT DEBUG INFO ON ModuleA FROM V;
```

## Analyzing Debug Output

Output from debugpoints is stored in the Java Profiler Heap Dump version 1.0.2 format.

Every time a debugpoint is hit during execution, the debug information is saved as a heap dump segment. Once execution finishes, you have two options to analyze the debug output:

- Use the textual representation of the debug information obtained via the `dbms_mle.parse_debug_output` function.
- Export the `BLOB` sink containing the debug output to an `hprof` file and use any of a number of existing developer tools to analyze the information.

### Topics

- [Textual Representation of Debug Output](#)  
The function `dbms_mle.parse_debug_output` takes as input a `BLOB` containing the debug information in the heap dump format and returns a JSON representation of the debug information.
- [Analyzing Debug Output Using Developer Tools](#)  
As an alternative to analyzing the textual representation of debug output, you also have the option to utilize tools such as JDeveloper, NetBeans, and Oracle Database Actions.

## Textual Representation of Debug Output

The function `dbms_mle.parse_debug_output` takes as input a `BLOB` containing the debug information in the heap dump format and returns a JSON representation of the debug information.

The output of `dbms_mle.parse_debug_output` is an array of `DebugPointData` objects. `DebugPointData` represents the debug information logged every time a debugpoint is hit and comprises of an array of `Frame` objects. Each `Frame` includes the location in source code where the information was collected (the `at` field) and the names and values of local variables

logged at that location (the `values` field). Note that the keys of `Frame.values` are the names of the variables logged and the values are the values of those variables.

[Example 8-6](#) demonstrates how you can specify a debugpoint in a sample JavaScript program and then use the function `dbms_mle.parse_debug_output` to produce a textual representation of the debug output.

### Example 8-6 Obtain Textual Representation of Debug Output

The debugging shown later in this example is performed on the JavaScript function `fib` defined in the module `fibonacci_module`:

```
CREATE OR REPLACE MLE MODULE fibonacci_module
LANGUAGE JAVASCRIPT AS
export function fib( n ) {

    if ( n < 0 ) {
        throw Error("must provide a positive number to fib()");
    }
    if ( n < 2 ) {
        return n;
    } else {
        return fib(n-1) + fib(n-2);
    }
}
/

CREATE OR REPLACE FUNCTION fib( p_value number)
RETURN NUMBER
AS MLE MODULE fibonacci_module
SIGNATURE 'fib(number)';
/
```

A debugpoint is placed at line 9 and then the `DBMS_MLE.PARSE_DEBUG_OUTPUT` function is used to view the debug information:

```
SET SERVEROUTPUT ON;
DECLARE
    l_debugspec JSON;
    l_debugsink BLOB;
    l_debuginfo JSON;
    l_value      NUMBER;
BEGIN
    l_debugspec := JSON ('
    {
        version : "1.0",
        debugpoints : [
            {
                at : {
                    name : "FIBUNACCI_MODULE",
                    line : 9
                },
                actions : [
                    { type : "watch", id : "n" }
                ]
            }
        ]
    }
    ');
```

```
        },
    ]
}
');
-- create a temporary lob to store the raw
-- debug output
DBMS_LOB.CREATETEMPORARY( l_debugsink, false );

DBMS_MLE.ENABLE_DEBUGGING( l_debugspec, l_debugsink );

-- run the application code
l_value := fib(4);

DBMS_MLE.DISABLE_DEBUGGING;

-- retrieve a textual representation of the debug
-- output
l_debuginfo := DBMS_MLE.PARSE_DEBUG_OUTPUT( l_debugsink );
DBMS_OUTPUT.PUT_LINE(
    json_serialize(l_debuginfo pretty)
);
END;
/
```

**Result:**

```
[
  [
    {
      "at": {
        "name": "USER1.FIBUNACCI_MODULE",
        "line": 9
      },
      "values": {
        "n": 4
      }
    }
  ],
  [
    {
      "at": {
        "name": "USER1.FIBUNACCI_MODULE",
        "line": 9
      },
      "values": {
        "n": 3
      }
    }
  ],
  [
    {
      "at": {
        "name": "USER1.FIBUNACCI_MODULE",
        "line": 9
      }
    }
  ]
]
```

```
    },  
    "values": {  
      "n": 2  
    }  
  }  
],  
[  
  {  
    "at": {  
      "name": "USER1.FIBUNACCI_MODULE",  
      "line": 9  
    },  
    "values": {  
      "n": 2  
    }  
  }  
]  
]
```

## Analyzing Debug Output Using Developer Tools

As an alternative to analyzing the textual representation of debug output, you also have the option to utilize tools such as JDeveloper, NetBeans, and Oracle Database Actions.

Once execution has finished, you can use the tool of your choice to inspect the values of local variables or to inspect the graph of variables at each point in time.

Integration with new tools can be developed as needed (e.g., Chrome Dev Tools) and UIs can be designed that are tailored specifically to the MLE use case.

### Note:

Oracle Database Actions supports MLE post-execution debugging starting with Oracle Database release 23c, version 23.1.2.

### See Also:

*Using Oracle SQL Developer Web* for more information about using Database Actions with MLE

## Error Handling in MLE

Errors encountered during the execution of MLE JavaScript code are reported as database errors.

The database error raised depends on the type of error encountered. For example, syntax errors raise `ORA-04160` while runtime errors (e.g., uncaught exceptions) raise

ORA-04161. The error message for each database error provides a brief description of the error encountered. Additionally, the `DBMS_MLE` PL/SQL package provides procedures to query the MLE JavaScript stack trace for the last error encountered in a dynamic MLE execution context or an MLE module in the current session.

The same security checks are made when calling `DBMS_MLE.get_ctx_error_stack()` as when calling `DBMS_MLE.eval()`. Thus, you cannot retrieve error stacks for MLE JavaScript code executing in dynamic MLE execution contexts created by other users.

`DBMS_MLE` provides a similar function, `DBMS_MLE.get_error_stack()`, to access the MLE JavaScript stack trace for application errors encountered during the execution of MLE modules. The function takes the module name and optionally the environment name as parameters, returning the stack trace for the most recent application error in a call specification based on the given arguments. If the module name or environment name is not a valid identifier, an ORA-04170 error is raised.

With MLE modules, it is only possible to retrieve the error stack for the module contexts associated with the calling user. This restriction avoids potentially leaking sensitive information between users via the error stack. A natural consequence of this restriction is that you cannot retrieve stack traces for errors encountered when executing definer's rights MLE call specifications owned by other users.

### Example 8-7 Throwing ORA-04161 Error and Querying the Stack Trace

Executing the following code will throw an ORA-04161 error:

```
CREATE OR REPLACE MLE MODULE catch_and_print_error_stack
LANGUAGE JAVASCRIPT AS

export function f(){
    g();
}

function g(){
    h();
}

function h(){
    throw Error("An error occurred in h()");
}
/

CREATE OR REPLACE PROCEDURE not_getting_entire_error_stack
AS MLE MODULE catch_and_print_error_stack
SIGNATURE 'f()';
/

BEGIN
    not_getting_entire_error_stack;
END;
/
```

**Result:**

```
BEGIN
*
ERROR at line 1:
ORA-04161: Error: An error occurred in h()
ORA-04171: at h (USER1.CATCHING_AND_PRINTING_ERROR_STACK:10:11)
ORA-06512: at "USER1.NOT_GETTING_THE_ENTIRE_ERROR_STACK", line 1
ORA-06512: at line 2
*/
```

**You can query the stack trace for this error using the procedure**

DBMS\_MLE.get\_error\_stack():

```
CREATE OR REPLACE PACKAGE get_entire_error_stack_pkg AS

    PROCEDURE get_entire_error_stack;

END get_entire_error_stack_pkg;
/

CREATE OR REPLACE PACKAGE BODY get_entire_error_stack_pkg AS

    PROCEDURE print_stack_trace( p_frames IN DBMS_MLE.error_frames_t )
AS
BEGIN
    FOR i in 1 .. p_frames.count LOOP
        DBMS_OUTPUT.PUT_LINE( p_frames(i).func || '(' ||
            p_frames(i).source || ':' || p_frames(i).line || ')' );
    END LOOP;
END print_stack_trace;

    PROCEDURE do_the_work
AS MLE MODULE catch_and_print_error_stack
SIGNATURE 'f()';

    PROCEDURE get_entire_error_stack AS
        l_frames DBMS_MLE.error_frames_t;
BEGIN
    do_the_work;
EXCEPTION
WHEN OTHERS THEN
    l_frames := DBMS_MLE.get_error_stack(
        'CATCH_AND_PRINT_ERROR_STACK'
    );
    print_stack_trace(l_frames);
    raise;
END;
END get_entire_error_stack_pkg;
/

BEGIN
    get_entire_error_stack_pkg.get_entire_error_stack;
```



```
END;  
/
```

The preceding code prints out the MLE JavaScript exception stack trace before raising the original error:

```
h(USER1.CATCH_AND_PRINT_ERROR_STACK:10)  
g(USER1.CATCH_AND_PRINT_ERROR_STACK:6)  
f(USER1.CATCH_AND_PRINT_ERROR_STACK:2)  
BEGIN  
*  
ERROR at line 1:  
ORA-04161: Error: An error occurred in h()  
ORA-06512: at "USER1.GET_ENTIRE_ERROR_STACK_PKG", line 25  
ORA-04171: at h (USER1.CATCH_AND_PRINT_ERROR_STACK:10:11)  
ORA-06512: at "USER1.GET_ENTIRE_ERROR_STACK_PKG", line 11  
ORA-06512: at "USER1.GET_ENTIRE_ERROR_STACK_PKG", line 18  
ORA-06512: at line 2
```

- [Errors in Callouts](#)  
Database errors raised during callouts to SQL and PL/SQL via the MLE SQL driver are automatically converted to JavaScript exceptions.
- [Accessing stdout and stderr from JavaScript](#)  
MLE provides functionality to access data written to standard output and error streams from JavaScript code.

## Errors in Callouts

Database errors raised during callouts to SQL and PL/SQL via the MLE SQL driver are automatically converted to JavaScript exceptions.

For most database errors, JavaScript code can catch and handle these exceptions as usual. However, exceptions resulting from critical database errors cannot be caught. This includes:

- Internal database errors (ORA-0600)
- Fatal database errors (ORA-0603)
- Errors triggered due to resource limits being exceeded (ORA-04036)
- User interrupts (ORA-01013)
- System errors (ORA-7445)

Exceptions resulting from database errors that are either not caught or are re-signaled cause the original database error to be raised in addition to an MLE runtime error (ORA-04161). You can retrieve the JavaScript stack trace for such exceptions using `DBMS_MLE.get_error_stack()` just like with other runtime errors.

## Accessing stdout and stderr from JavaScript

MLE provides functionality to access data written to standard output and error streams from JavaScript code.

Within a database session, these streams can be controlled individually for each database user, MLE module, and dynamic MLE context. In each case, a stream can be:

- Disabled,
- Redirected to `DBMS_OUTPUT`, or
- Redirected to a user provided CLOB
- [Accessing stdout and stderr for MLE Modules](#)  
The `DBMS_MLE` PL/SQL package provides the procedures `set_stdout()` and `set_stderr()` to control the standard output and error streams for each MLE module context.
- [Accessing stdout and stderr for Dynamic MLE](#)  
The procedures `DBMS_MLE.set_ctx_stdout()` and `DBMS_MLE.set_ctx_stderr()` are used to redirect `stdout` and `stderr` for dynamic MLE contexts.

## Accessing stdout and stderr for MLE Modules

The `DBMS_MLE` PL/SQL package provides the procedures `set_stdout()` and `set_stderr()` to control the standard output and error streams for each MLE module context.

Alternatively, `stdout` can be redirected to `DBMS_OUTPUT` using the function `DBMS_MLE.set_stdout_to_dbms_output()`. The `DBMS_MLE` package provides an analogous function for redirection `stderr`: `DBMS_MLE.set_stderr_to_dbms_output()`.

`stdout` and `stderr` can be disabled for a module at any time by calling `DBMS_MLE.disable_stdout()` and `DBMS_MLE.disable_stderr()` respectively.

By default, `stdout` and `stderr` are redirected to `DBMS_OUTPUT`.

Note that the `CURRENT_USER` from an MLE function exported by the given MLE module may change depending on the `CURRENT_USER` when the function was called and whether the function is invoker's rights or definer's rights. A call to `DBMS_MLE.set_stdout()` or `DBMS_MLE.set_stderr()` by a database user, say `user1`, only redirects the appropriate stream when code in the MLE module executes with the privileges of `user1`.

In other words, one database user cannot ordinarily control the behavior of `stdout` and `stderr` for execution of an MLE module's code on behalf of another user.

All of these procedures take a module name and optionally an environment name as first and second arguments. This identifies the execution context whose output should be redirected. Omitting the environment name targets contexts using the base environment. Additionally, `set_stdout` and `set_stderr` take a user-provided CLOB as the last argument, specifying where the output should be written to.

### Example 8-8 Redirect stdout to CLOB and DBMS\_OUTPUT for MLE Module

Consider the following JavaScript module:

```
CREATE OR REPLACE MLE MODULE hello_mod
LANGUAGE JAVASCRIPT AS
  export function hello() {
    console.log('Hello, World from MLE!');
  }
/
```

The following call specification makes the exported function `hello()` available for calling from PL/SQL code.

```
CREATE OR REPLACE PROCEDURE MLE_HELLO_PROC
AS MLE MODULE hello_mod SIGNATURE 'hello';
/
```

The code below redirects `stdout` for the module `hello_mod` to a CLOB that can be examined later:

```
SET SERVEROUTPUT ON;
DECLARE
    l_output_buffer CLOB;
BEGIN
    -- create a temporary LOB to hold the output
    DBMS_LOB.CREATETEMPORARY(l_output_buffer, false);

    -- redirect stdout to a CLOB
    DBMS_MLE.SET_STDOUT('HELLO_MOD', l_output_buffer);

    -- run the code
    MLE_HELLO_PROC();

    -- retrieve the output buffer
    DBMS_OUTPUT.PUT_LINE(l_output_buffer);
END;
/
```

Executing the above produces the following output:

```
Hello, World from MLE!
```

Alternatively, `stdout` can be redirected to `DBMS_OUTPUT` using the function `DBMS_MLE.SET_STDOUT_TO_DBMS_OUTPUT()`:

```
SET SERVEROUTPUT ON;
BEGIN
    DBMS_MLE.SET_STDOUT_TO_DBMS_OUTPUT('HELLO_MOD');
    MLE_HELLO_PROC();
END;
/
```

This produces the same output as before:

```
Hello, World from MLE!
```

## Accessing stdout and stderr for Dynamic MLE

The procedures `DBMS_MLE.set_ctx_stdout()` and `DBMS_MLE.set_ctx_stderr()` are used to redirect `stdout` and `stderr` for dynamic MLE contexts.

The `DBMS_MLE` package similarly provides the procedures `set_ctx_stdout_to_dbms_output()` and `set_ctx_stderr_to_dbms_output()` to redirect `stdout` and `stderr` for dynamic MLE contexts to `DBMS_OUTPUT`.

A call to one of these functions redirects the appropriate stream for all dynamic MLE code executing within the context. However, any calls to MLE functions via the MLE SQL driver use the redirection effect for the MLE module that implement the function.

### Example 8-9 Redirect stdout to CLOB and DBMS\_OUTPUT for Dynamic MLE

```
SET SERVEROUTPUT ON;
DECLARE
    l_ctx DBMS_MLE.context_handle_t;
    l_snippet CLOB;
    l_output_buffer CLOB;
BEGIN
    -- allocate the execution context and the output buffer
    l_ctx := DBMS_MLE.create_context();
    DBMS_LOB.CREATETEMPORARY(l_output_buffer, false);

    -- redirect stdout to a CLOB
    DBMS_MLE.SET_CTX_STDOUT(l_ctx, l_output_buffer);

    -- a bit of JavaScript code printing to the console
    l_snippet := 'console.log( "Hello, World from dynamic MLE!" )';

    -- execute the code snippet
    DBMS_MLE.eval(l_ctx, 'JAVASCRIPT', l_snippet);

    -- drop the execution context and print the output
    DBMS_MLE.drop_context(l_ctx);
    DBMS_OUTPUT.PUT_LINE(l_output_buffer);
END;
/
```

This produces the following output:

```
Hello, World from dynamic MLE!
```

# 9

## MLE Security

MLE utilizes a number of methods to support good security practices. This includes enforcing runtime state isolation, system and object privileges, and providing monitoring options.

### Topics

- [System and Object Privileges Required for Working with JavaScript in MLE](#)  
Depending on the project's requirements, different privileges can be granted to users and or roles, allowing them to interact with JavaScript in the database.
- [Security Considerations for MLE](#)  
Besides the use of account privileges, MLE employs several other methods to ensure a high level of security.
- [JavaScript Security Best Practices](#)  
Details concerning the best practices when using features of MLE with JavaScript are described.
- [MLE Security Examples](#)  
Example scenarios are used to demonstrate security features used by MLE. The examples use a varying degree of separation between MLE modules, environments, and the necessary grants to enable the utilized functionality.

## System and Object Privileges Required for Working with JavaScript in MLE

Depending on the project's requirements, different privileges can be granted to users and or roles, allowing them to interact with JavaScript in the database.

Administrators should review application requirements carefully and only grant the minimum number of privileges necessary to users. This is especially true for system privileges, which are very powerful and should only be granted to trusted users.

The minimum privilege required to work with MLE JavaScript code is the right to execute JavaScript code in the database. MLE distinguishes between dynamic MLE execution based on `DBMS_MLE` and MLE execution using MLE modules and environments.

Creating stored code in JavaScript requires additional privileges to create JavaScript schema objects in your own schema.

The most powerful privileges available in MLE allow super-users to create, alter, and drop MLE schema objects in any schema, not just their own. As with all privileges in Oracle Database, those with `ANY` in their name are most powerful and should only be granted to trusted users if deemed absolutely necessary.

 **Note:**

Object privileges on modules and environments do not grant access to an application, for example, the combination of source code and user context defined by a call specification (or through `DBMS_MLE`). This is achieved by granting access to the procedure or function object of the call specification.

 **See Also:**

- [Necessary Privileges for Creating MLE Modules and Environments in ANY Schema](#) for more about handling system privileges
- *Oracle Database Security Guide* for more information about privileges in the Oracle Database

### Topics

- [Necessary Privileges for the Execution of JavaScript Code](#)
- [Necessary Privileges for Using the NoSQL API](#)
- [Necessary Privileges for Creating MLE Schema Objects](#)
- [Necessary Privileges for Creating MLE Modules and Environments in ANY Schema](#)
- [Necessary Privileges for Post-Execution Debugging](#)

## Necessary Privileges for the Execution of JavaScript Code

Before you can execute any JavaScript code in your own schema, the following object grant must have been issued to your user account:

```
GRANT EXECUTE ON JAVASCRIPT TO <role | user>
```

The `EXECUTE ON JAVASCRIPT` privilege does not include dynamic execution of JavaScript using `DBMS_MLE`. If you wish to make use of `DBMS_MLE`, an additional privilege is required:

```
GRANT EXECUTE DYNAMIC MLE TO <role | user>
```

## Necessary Privileges for Using the NoSQL API

In cases where MLE JavaScript code references the Simple Oracle Document Access (SODA), the `SODA_APP` role must be granted to the user or role:

```
GRANT SODA_APP <role | user>
```

## Necessary Privileges for Creating MLE Schema Objects

If you wish to create MLE modules and environments in your own schema, further system privileges are required:

```
GRANT CREATE MLE TO <role | user>
```

In case any MLE module is to be exposed to the database's SQL and PL/SQL layers in the form of call specifications, you also require the right to create PL/SQL procedures:

```
GRANT CREATE PROCEDURE TO <role | user>
```

It is highly likely that you will require further system privileges, depending on your use case, to create additional schema objects such as tables, indexes, and sequences. Beginning with Oracle Database 23c, the `DB_DEVELOPER_ROLE` role allows administrators to grant the necessary privileges to developers in their local development databases quickly, as shown in the following snippet:

```
BEGIN
    DBMS_DEVELOPER_ADMIN.GRANT_PRIVS('DEVUSER');
END;
/
```



### See Also:

*Oracle Database Security Guide* for more information about the `DB_DEVELOPER_ROLE` role

## Necessary Privileges for Creating MLE Modules and Environments in ANY Schema

Additional privileges can be granted to power users and administrators, allowing them to create, alter, and drop MLE schema objects in *any* schema.

```
GRANT CREATE ANY MLE TO <role | user>
GRANT DROP ANY MLE TO <role | user>
GRANT ALTER ANY MLE TO <role | user>
```

As with all privileges in Oracle Databases featuring `ANY` in their name, these are very powerful and should only be granted after a thorough investigation to trusted users. For this reason, only the `DBA` role and the `SYS` account have been granted these privileges. The use of these system privileges is audited by the `ORA_SECURECONFIG` audit policy.

To create MLE call specifications in schemas other than your own requires the right to `CREATE ANY PROCEDURE` to be granted as well:

```
GRANT CREATE ANY PROCEDURE TO <role | user>
```

Just like the previously listed system privileges, `CREATE ANY PROCEDURE` is audited by the same audit policy, `ORA_SECURECONFIG`.

 **See Also:**

*Oracle Database Security Guide* for more information about the `ORA_SECURECONFIG` audit policy

## Necessary Privileges for Post-Execution Debugging

It is possible to allow other database users to collect debug information for MLE modules they don't own. By default, MLE owners can use post-execution debugging on their own MLE modules without specific grants. It is possible to grant the ability to collect debug information to a different role or user, allowing them to use post-execution debugging of JavaScript code on your behalf as the module owner:

```
GRANT COLLECT DEBUG INFO ON <module> TO <role | user>
```

 **Note:**

You can elect to grant the execute privilege on MLE module calls created as PL/SQL code with definer's rights to users in other schemas. In this case, there is no need to grant other users any additional privileges.

 **Note:**

Object privileges on modules and environments do not grant access to an application, for example, the combination of source code and user context defined by a call specification (or through `DBMS_MLE`). This is achieved by granting access to the procedure or function object of the call specification.

 **See Also:**

[Post-Execution Debugging of MLE JavaScript Modules](#) for more information on post-execution debugging



# Security Considerations for MLE

Besides the use of account privileges, MLE employs several other methods to ensure a high level of security.

## Topics

- [Initialization Parameter](#)
- [Execution Contexts](#)
- [Runtime State Isolation](#)
- [Database Security Model](#)
- [Considerations for Using MLE Call Specifications and Modules from Different Schemas](#)
- [Auditing MLE Operations in Oracle Database](#)

## Initialization Parameter

A new initialization parameter, `MLE_PROG_LANGUAGES`, allows administrators to enable and disable Multilingual Engine completely or selectively enable certain languages. It takes the values `ALL`, `JAVASCRIPT`, or `OFF` and it can be set at multiple levels:

- Container Database (CDB)
- Pluggable Database (PDB)
- Database session

If the parameter is set to `OFF` at CDB level, it cannot be enabled at PDB or session level. The same logic applies for PDB and session level: if MLE is disabled at the PDB level, it cannot be enabled at session level.

### Note:

In Oracle Database 23c, MLE supports JavaScript as its sole language. Setting the parameter to `ALL` or `JAVASCRIPT` has the same effect.

### Note:

Setting `MLE_PROG_LANGUAGES` to `OFF` prevents the execution of JavaScript code in the database, it does not prevent the creation or modification of existing code.

### See Also:

*Oracle Database Reference* for more information about `MLE_PROG_LANGUAGES`

## Execution Contexts

When executing JavaScript code in the database, MLE uses execution contexts to isolate runtime state such as global variables and other important information. Execution contexts are created implicitly when using modules and environments and explicitly when using `DBMS_MLE`.

Regardless of the choice of JavaScript invocation, execution contexts are designed to prevent information leak.

The scope of JavaScript state never exceeds the lifetime of a database session. As soon as the session ends, either gracefully or forcefully, session state is discarded. If state needs to be preserved between sessions, you must persist it by storing it in a schema. If needed, state can be discarded by calling `DBMS_SESSION.reset_package()`.



### See Also:

*Oracle Database PL/SQL Packages and Types Reference* for more information about `DBMS_SESSION`

## Runtime State Isolation

An MLE call specification is a PL/SQL unit referencing a function in an MLE module with an optional MLE environment attached. When you invoke a call specification in a session, the corresponding MLE module is loaded, the optional environment is applied, and the function specified in the call specification's signature clause is executed.

Before execution can begin, a corresponding execution context must be created (implicitly). Whether a new execution context is created or an existing context is reused depends on multiple factors, specifically:

- The MLE module referenced in the call specification
- The corresponding MLE environment
- The database user executing the call specification

Separate execution contexts are created to prevent information leak as well as undesired side effects such as global variables in a module being overwritten by accident.

With each invocation of a call specification, additional execution contexts are created. This is done so that modules cannot interfere with one another.

The main criteria for creating execution contexts in a user session are the MLE module name and the corresponding MLE environment. Call specifications referring to different combinations of MLE module and environment lead to different individual execution contexts being created.

Further separation between execution contexts is performed based on the user invoking the call specification.

### Example 9-1 Runtime State Isolation Scenario

This example provides a sample scenario for runtime state isolation. Database user `USER1` creates the following MLE schema objects:

```
CREATE OR REPLACE MLE MODULE isolationMod LANGUAGE JAVASCRIPT AS

let id;      // global variable

export function doALotOfWork() {
  // a dummy function simulating a lot of work
  // the focus is on modifying a global variable

  id = 10;
}

export function getId() {

  return (id === undefined ? -1 : id)
}
/

CREATE OR REPLACE MLE ENV isolationEnv;

CREATE OR REPLACE PACKAGE context_isolation_package AS

  -- initialise runtime state
  procedure doALotOfWork as
    mle module isolationMod
      signature 'doALotOfWork()';

  -- access a global variable (part of session state)
  function getId return number as
    mle module isolationMod
      signature 'getId()';

  -- same function signature as before but referencing an environment
  function getIdwEnv return number as
    mle module isolationMod
      env isolationEnv
      signature 'getId()';
END;
/
```

When `USER1`, the owner of the MLE module, environment, and call specification (package), calls `context_isolation_package.doALotOfWork()`, the global variable (`id`) is initialized to 10.

```
BEGIN
  context_isolation_package.doALotOfWork();
END;
/
```

Because `context_isolation_package.getId()` references the same MLE module and the same (default) environment as `context_isolation_package.doALotOfWork()`, the user's session has access to the global variable:

```
SELECT CONTEXT_ISOLATION_PACKAGE.getId;
```

```
      GETID
-----
         10
```

When the combination of user, MLE module, and environment change, a new execution context is created. Although `context_isolation_package.getIdwEnv()` references the same MLE module as `getId()` and the user doesn't change, the function cannot retrieve the value of the global variable from the previously created execution context:

```
SELECT CONTEXT_ISOLATION_PACKAGE.getIdwEnv;
```

```
      GETIDWENV
-----
          -1
```

A value of `-1` indicates that the global variable in the JavaScript module was found to be uninitialized.

If `USER1`, as the owner of the MLE call specification, grants the execute privilege on the package to another user, let's say `USER2`, a different execution context is created for `USER2` even though the same function is called:

```
GRANT EXECUTE ON CONTEXT_ISOLATION_PACKAGE TO user2;
```

When `USER2` tries to read the value of the `ID`, a new context is created and the return value indicating an uninitialized context is returned:

```
SELECT user1.CONTEXT_ISOLATION_PACKAGE.getId;
```

```
      GETID
-----
          -1
```

In this example, module and environment are identical between `USER1` and `USER2` as per the call specification. However, the fact that the function is called by a different user causes a new execution context to be created.

## Database Security Model

The fewer privileges granted to program units, accounts, and roles, the less likely it is for them to be misused. As with every application, the principle of granting only the minimum number of necessary privileges should be followed. This is especially true in higher-tier environments like production. Technologies such as Privilege Analysis can be used to track down unnecessary privileges, allowing you to revoke them after careful regression testing.

Each MLE call specification is created within its own security context. The context includes information such as:

- The value of the `AUTHID` clause (definer or invoker)
- Whether or not privileges are inherited in invoker's rights calls
- Code Based Access Control
- Current user
- The qualified schema name
- Enabled Roles and Privileges in the absence of code based access control (CBAC) and invoker's rights

The combination of these attributes forms the security context of a code unit such as a MLE call specification or module. Note that no such security context exists for the JavaScript code stored in an MLE module.

PL/SQL allows you to easily change these attributes for each PL/SQL unit. A procedure can be executed with the invoker's rights or the definer's rights, roles can be attached to PL/SQL units, and cross-schema (execute) grants are commonplace. With each execution of a PL/SQL unit the security context may potentially change. This applies equally to MLE call specifications.

The situation is different with JavaScript code: the security context does not change for JavaScript-to-JavaScript calls. JavaScript functions do not have any notion of associated invoker's or definer's rights, or roles granted on the function itself. All of these apply only to (PL/SQL) call specifications.

JavaScript executed using `DBMS_MLE` is a little more strict when it comes to its security context. The combination of currently active user, roles/privileges, and schema in effect are recorded at the time the execution context is created by calling `DBMS_MLE.create_context()`. This combination must not change until the JavaScript code is executed and the context is removed, or else an error is thrown.



#### See Also:

*Oracle Database Security Guide* for more information about Privilege Analysis

## Considerations for Using MLE Call Specifications and Modules from Different Schemas

The same consideration that is used for other database applications written in, for example, PL/SQL apply for MLE JavaScript code as well. If a user is granted access to execute code from a schema other than their own, care needs to be taken to ensure the extent to which the code can use privileges of the calling user is appropriate.

Unlike PL/SQL, MLE JavaScript code stored in an MLE module is not associated with a particular set of roles, or any other notion of determining the security context in which the JavaScript code executes. From a high-level view, there are two important cases for cross-schema use of privileges:

1. USER1 invokes a call specification located in USER2's schema. The AUTHID clause of the call specification in USER2's schema determines whether the code owned by USER2's schema executes with the privileges of the invoker (USER1) or definer (USER2). In case of an invoker's rights call specification, potentially attached roles (CBAC) and the setting of INHERIT PRIVILEGES determine the active roles and privileges in addition to those granted by USER1 by roles or direct grants.
2. USER1 creates a call specification CallSpec\_A for a module Module\_A owned by USER1. CallSpec\_A imports a JavaScript module Module\_B owned by a different schema, USER2. The JavaScript code in Module\_B is imported into an execution context created for USER1's call specification CallSpec\_A. The JavaScript code in Module\_B executes with the same privileges as any other JavaScript code in this execution such as in Module\_A. USER1 must ensure that the code in Module\_B is trustworthy and appropriate to execute with these privileges.

 **See Also:**

*Oracle Database Security Guide* for more information about roles in definer's rights and invoker's rights PL/SQL units

## Auditing MLE Operations in Oracle Database

Auditing is the monitoring and recording of configured database actions. As with any other auditable operations in Oracle Database, the use of MLE-related system privileges can be recorded.

Oracle provides the `ORA_SECURECONFIG` audit policy with the database. Starting with Oracle Database Release 23c, the audit policy includes the use of the following MLE system privileges:

- `CREATE ANY MLE`
- `ALTER ANY MLE`
- `DROP ANY MLE`

Administrators and security teams need to create and enable additional security policies if auditing the creation of MLE schema objects, including MLE modules, environments, and call specifications, is desired.

 **See Also:**

*Oracle Database Security Guide* for more information about auditing in Oracle Database

# JavaScript Security Best Practices

Details concerning the best practices when using features of MLE with JavaScript are described.

## Topics

- [Using Bind Variables for Security and Performance](#)
- [Generic Database and PL/SQL Specific Security Considerations](#)
- [Supply Chain Security](#)
- [Software Bill of Material](#)
- [Using the Database to Store State](#)
- [Disabling Multilingual Runtime](#)

## Using Bind Variables for Security and Performance

The MLE JavaScript SQL driver allows you to use string concatenation to build SQL commands, including the predicates used in queries and DML statements. It is strongly recommended to avoid this bad practice as it is a major source for SQL injection attacks. Not only is the use of bind variables in SQL statements more secure than string concatenation but it is also more efficient as it allows the database to reuse the cursor in the shared pool.

If it is not possible to avoid the creation of dynamic SQL, ensure that you validate input to your code and scan for malicious content. The built-in `DBMS_ASSERT` package provides a wealth of functions designed to mitigate against SQL injection attacks. It does not offer complete protection but its use is very much recommended as it allows you to verify the following:

- The input string is a qualified SQL name
- The input string is an existing schema name
- The input string is a simple SQL name
- The input parameter string is a qualified SQL identifier of an existing SQL object

The use of bind variables for better security and scalability is not limited to a single programming language such as JavaScript, it equally applies to every development project using Oracle Database.

### See Also:

- [Server-Side JavaScript API Documentation](#) for information about using bind variables with `mle-js-oracledb`
- *Oracle Database Development Guide* for more details regarding bind variables and their impact on performance and security

**Example 9-2 Using Bind Variables Rather than String Concatenation**

In this example, the `SELECT` statement accepts a bind variable rather than concatenation the input variable, `managerID`, to the SQL command.

```
CREATE OR REPLACE MLE MODULE select_bind LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function numEmployeesByManagerID(managerID) {

    const conn = oracledb.defaultConnection(managerID);
    const result = conn.execute(
        `SELECT count(*) FROM employees WHERE manager_id = :1`,
        [ managerID ]
    );

    return result.rows[0][0];
}
/
```

**Example 9-3 Use `DBMS_ASSERT` to Verify Valid Input**

In this example, the function `createTempTable()` creates a private temporary table to hold intermediate results from a batch process. The function takes a single argument: the name of the temporary table to be created (minus the prefix). The function checks if the parameter passed to it is a valid SQL name.

```
CREATE OR REPLACE MLE MODULE dbms_assert_module LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function createTempTable(tableName) {
    const conn = oracledb.defaultConnection();
    let result;
    let validTableName;

    try {
        result = conn.execute(
            `SELECT dbms_assert.qualified_sql_name(:tableName)`,
            [tableName]
        );
        validTableName = result.rows[0][0];
    } catch (err) {
        throw (`${tableName}' is not a valid table name`);
        return;
    }

    result = conn.execute(
        `CREATE PRIVATE TEMPORARY TABLE ora\${p}tt_${validTableName} (id
number)`
    );
}
/
```



If the table name passed to the function passes the test, it is then used to create a private temporary table using the default `private_temp_table_prefix`.

## Generic Database and PL/SQL Specific Security Considerations

Because all JavaScript code is accessed eventually via a PL/SQL call specification, it is important to understand the implications of using PL/SQL as well. The following concepts are of particular importance:

- The difference between invoker's rights and definer's rights
- Code Based Access Control (CBAC)
- The impact of `INHERIT PRIVILEGES` in invoker's rights code
- Role grants and direct grants, both object as well as system privileges

You should always aim to only require the minimum security privileges (object and system) for JavaScript code to execute. This is especially important when you consider the use of external third-party JavaScript code.

Administrators should consider the use of encryption for both data at rest as well as data in motion.

### See Also:

- *Oracle Database Security Guide* for more information about generic database-related security aspects
- *Oracle Database Advanced Security Guide* for information about encrypting data at rest using Transparent Data Encryption (TDE)

## Supply Chain Security

Access to the rich community ecosystem is one of the advantages of using JavaScript in Oracle Database. Rather than creating functionality in-house and potentially duplicating effort, existing JavaScript can be used instead. While this is a convenient method for developing applications, it comes with certain risks.

In past years, the term supply chain attack has been used to describe the fact that certain popular open-source JavaScript modules have been abandoned by the original maintainers. Bad actors have taken some of these projects, becoming maintainers but only to inject malicious code into the source. The next time a project references such a compromised module, they incorporate the malicious code.

The same principles applied to client-side development apply to server-side development with MLE. Developers and security teams must be aware that code in the application executes with potentially elevated privileges. These can be abused by malicious code to compromise confidentiality, integrity, and availability properties of the application. For that reason, extra care must be taken to ensure third-party code is trustworthy and that the minimum number of privileges is granted to it. Many companies have a dedicated security team for vetting open-source modules prior to granting their approval to use them. At the very least, you should audit the JavaScript code that you are about to include in your project and document the result.

It is possible to lock a given version of an open-source module using a mechanism like the `package-lock.json` file so as not to get caught out if a new version of a module is distributed. Automatically pulling the latest version of an external code dependency is bad practice and should always be avoided.

In the case of JavaScript in MLE, JavaScript code executes with the database privileges that are in effect for the associated execution context. JavaScript code can retrieve and modify data stored in the database according to these privileges. Malicious code can leverage these privileges to modify the database in an inappropriate manner.

As a consequence, be sure to grant the privileges to create MLE modules carefully and only grant these in environments where they are essential. If possible, avoid granting the `[CREATE | ALTER | MODIFY] ANY` system privileges at all.

You should also review the `INHERIT PRIVILEGES` settings in the context of invoker's rights procedures. Once the settings for `INHERIT PRIVILEGES` are reviewed and secured according to industry best practice, consider the use of invoker's rights for MLE call specifications.

Additional higher levels of security for invoker's rights procedures can be achieved by implementing code based access control (CBAC). Using CBAC, developers can associate roles to PL/SQL units without having to elevate the privileges of the schema or invoker.



#### See Also:

*Oracle Database Security Guide* for details about the `INHERIT PRIVILEGES` privilege

## Software Bill of Material

Every project relying on external code in projects is strongly encouraged to maintain a record of all software components (including versions) that are bundled in a deployed application artifact.

The software bill of material (SBOM) is the key tool to use when reacting swiftly to a newly published vulnerability is of utmost importance. Exploits are almost guaranteed to be used immediately after a vulnerability has been published. Knowing exactly which version of a third-party library is in use allows you to save crucial time in preparing a response.

In addition to storing the actual code, MLE modules feature a metadata field that can be used to store arbitrary metadata with the module. In particular, it can be used to store an SBOM that describes all JavaScript libraries bundled in the module. The field is not interpreted by the MLE runtime. Content and format are entirely up to you.

 **See Also:**

[MLE JavaScript Modules and Environments](#) for more information about creating MLE modules and providing metadata to them

## Using the Database to Store State

Applications written using MLE JavaScript code should not deviate from established patterns such as storing application state in tables. This allows you to make the best use of the rich number of security features available for Oracle Database.

In particular, you should not rely on JavaScript state that exceeds the boundaries of one stored procedure or function call.

Oracle Database has great support for JSON, offering both a relational as well as a NoSQL API. The database's JSON API is a natural candidate for MLE JavaScript code to store state. Storing state in Oracle Database provides a better programming model than application state, especially when it come to data persistence and transactional consistency.

 **See Also:**

*Oracle Database JSON Developer's Guide* for information about using JSON with Oracle Database

### Example 9-4 Using Bind Variables Rather than String Concatenation

In this example, the `SELECT` statement accepts a bind variable rather than concatenation the input variable, `managerID`, to the SQL command.

```
CREATE OR REPLACE MLE MODULE select_bind LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function numEmployeesByManagerID(managerID) {

    const conn = oracledb.defaultConnection(managerID);
    const result = conn.execute(
        `SELECT COUNT(*) FROM employees WHERE manager_id = :1`,
        [ managerID ]
    );

    return result.rows[0][0];
}
/
```

### Example 9-5 Use `DBMS_ASSERT` to Verify Valid Input

In this example, the function `createTempTable()` creates a private temporary table to hold intermediate results from a batch process. The function takes a single argument: the name of

the temporary table to be created (minus the prefix). The function checks if the parameter passed to it is a valid SQL name.

```
CREATE OR REPLACE MLE MODULE dbms_assert_module LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

export function createTempTable(tableName) {
  const conn = oracledb.defaultConnection();
  let result;
  let validTableName;

  try {
    result = conn.execute(
      `SELECT dbms_assert.qualified_sql_name(:tableName)`,
      [tableName]
    );
    validTableName = result.rows[0][0];
  } catch (err) {
    throw (`${tableName}' is not a valid table`);
    return;
  }

  result = conn.execute(
    `CREATE PRIVATE TEMPORARY TABLE ora\${pvt}_\${validTableName} (id
number)`
  );
}
/
```

If the table name passed to the function passes the test, it is then used to create a private temporary table using the default `private_temp_table_prefix`.

## Disabling Multilingual Runtime

In the case where a security vulnerability is detected in JavaScript code, you can prevent JavaScript code from execution by disabling the JavaScript runtime. Setting the initialization parameter `MLE_PROG_LANGUAGES` to `OFF` does not stop the database from accepting new code (such behavior prevents the implementation of a code fix) but it does stop anyone from executing JavaScript code.

Applications should be written with that option in mind. Once the MLE runtime is disabled, an error is thrown. Rather than showing the raw error to the end user, a more accessible error message should be created.

Although JavaScript does not have a specific lockdown feature, using the `MLE_PROG_LANGUAGES` parameter allows you to disable the MLE runtime at the session, PDB (lockdown profiles operate at this level), or CDB level. The `COMMON_SCHEMA_ACCESS` feature bundle in the lockdown profile can be used to disable MLE DDL.

## MLE Security Examples

Example scenarios are used to demonstrate security features used by MLE. The examples use a varying degree of separation between MLE modules, environments, and the necessary grants to enable the utilized functionality.

Note that the examples are not fully usable on their own. The actual JavaScript code is not as important as the application's structure, such as:

- The schemas in which the code is located
- The call specification's syntax
- The roles and privileges granted

### Topics

- [Business Logic Stored in MLE Modules](#)  
In this scenario, a user provides functionality implemented in JavaScript that is bound to a particular schema and relies on being executed as a particular user with certain privileges.
- [Generic Data Processing Libraries](#)  
In this scenario, generic JavaScript functionality is logically grouped inside a database schema. The JavaScript code is neither functionally nor logically tied to any existing database objects. In other words, the processing logic is stateless.
- [Generic Libraries in Business Logic](#)  
This scenario utilizes business logic contained in a single schema and extends functionality using generic libraries.

## Business Logic Stored in MLE Modules

In this scenario, a user provides functionality implemented in JavaScript that is bound to a particular schema and relies on being executed as a particular user with certain privileges.

This scenario covers the typical case of a back-end application centered around a single schema containing all necessary tables, indices, etc. Most importantly, the business logic is implemented as stored code in the database.

The JavaScript implementation in the form of MLE modules and an MLE environment is encapsulated in a single schema. Access to the functionality is only exposed using MLE call specifications based on one or multiple modules. Users of the application are granted execute privileges on (PL/SQL) call specifications only. No further privileges on MLE modules and environment are granted, nor are they necessary.

Consequently, the owner of the MLE modules controls access to the application through the `AUTHID` clause attached to the MLE call specifications. The pseudo-code in [Example 9-6](#) demonstrates this scenario.

### Example 9-6 Business Logic Stored in MLE Modules

In this example, the application schema is referred to as `APP_OWNER`. Note how MLE modules and environments are restricted to the `APP_OWNER` schema.

```
-- MLE Module containing helper functions commonly used by the application
CREATE MLE MODULE app_owner.helper_module LANGUAGE JAVASCRIPT AS
```

```
export function setDebugLevel(level) {
  // ... JavaScript code ...
}

// ... additional functionality ...
/

-- An MLE Environment allowing other MLE Modules to import the helper
module
CREATE MLE ENV app_owner.helper_module_env IMPORTS (
  'helperModule' module helper_module
);

-- The main application module imports the helper module for common
tasks
CREATE MLE MODULE app_owner.orders_module LANGUAGE JAVASCRIPT AS

import { setDebugLevel } from "helperModule";

export function newOrder() {

setDebugLevel("INFO");
  // ... JavaScript code ...
}

export function delivery() {
  setDebugLevel("WARN");
  // ... JavaScript code ...
}

// ... additional functionality ...
/

-- The call specification is all the end users need to be granted
-- access to. The execute privilege to this definer's rights procedure
-- (created and executed with the app_owner's database privileges)
-- is all that needs granting to the application role.

CREATE app_owner.package orders_pkg AS

  PROCEDURE new_order AUTHID DEFINER AS
    MLE MODULE orders_module
    ENV helper_module_env
    SIGNATURE 'newOrder()';

  PROCEDURE delivery AUTHID DEFINER AS
    MLE MODULE orders_module
    ENV helper_module_env
    SIGNATURE 'delivery()';

END order_pkg;
/

GRANT EXECUTE ON app_owner.package orders_pkg TO app_role;
```

## Generic Data Processing Libraries

In this scenario, generic JavaScript functionality is logically grouped inside a database schema. The JavaScript code is neither functionally nor logically tied to any existing database objects. In other words, the processing logic is stateless.

As there is no relation to any database schema objects such as tables or views, object grants are of no concern. The JavaScript code purely transforms functional arguments. Examples for such libraries include machine learning code, image manipulation like scaling, cropping, changes of resolution, etc. Other use cases include input validation or JSON processing.

The main purpose of the MLE modules deployed in such a fashion is to provide you with a common set of JavaScript tools that can be used in your own applications. Therefore, there aren't any pre-defined MLE call specifications provided. Instead, the schema containing these modules grants the execute privilege on MLE modules. It is up to the grantee to define MLE call specifications matching the use case. If necessary, MLE environments can be created alongside the MLE modules with respective grants to developers wishing to use the functionality created. [Example 9-7](#) illustrates this scenario.

### Example 9-7 Generic Data Processing Libraries

```
-- Common functionality potentially referenced by multiple applications
-- is grouped in a database schema. This particular MLE Module provides
-- input validation
CREATE MLE MODULE library_owner.input_validator_module
  LANGUAGE JAVASCRIPT USING BFILE(js_src_dir, 'input_validator.js');
/

-- Another MLE module provides common machine learning functionality
CREATE MLE MODULE library_owner.commom_ml_module
  LANGUAGE JAVASCRIPT USING BFILE(js_src_dir, 'commom_ml_lib.js');
/

-- Rather than a Call Specification as demonstrated in Example 9-6,
-- this time the MLE Modules themselves are exported for use
-- in a different schema: frontend_app
GRANT EXECUTE ON library_owner.input_validator_module TO frontend_app;
GRANT EXECUTE ON library_owner.commom_ml_module TO frontend_app;

-- frontend_app makes explicit use of a select few functions exported
-- by the MLE modules
CREATE PACKAGE input_validator_pkg AS

  FUNCTION checkEMail(p_email VARCHAR2) RETURN BOOLEAN AS
    MLE MODULE library_owner.input_validator_module
    SIGNATURE 'checkEmail(string)';

  FUNCTION checkZIPCode(p_zipcode VARCHAR2) RETURN BOOLEAN AS
    MLE MODULE library_owner.input_validator_module
    SIGNATURE 'checkZIPCode(string)';

  -- additional functionality ...
END;
/
```

The grouping of common, stateless JavaScript code is not limited to a single schema. Further separation by feature, functionality, or maintainer is possible as well.

## Generic Libraries in Business Logic

This scenario utilizes business logic contained in a single schema and extends functionality using generic libraries.

This example extends the scenarios demonstrated by [Example 9-6](#) and [Example 9-7](#). It is conceivable that the domain-specific business logic might require extension by common functionality such as logging or debugging. The latter can be written generically so that other applications can include it as well. There are numerous advantages to that approach including, but not limited to a unified framework for auxiliary functions.

In [Example 9-8](#), the business logic in the `APP_OWNER`'s schema, defined in [Example 9-6](#), is extended with the previously introduced validation and machine learning functionality from [Example 9-7](#).

There is no "best way" to work with MLE modules and environments in the database. It always depends on your particular use case. The included examples simply provide some background on how application logic can be grouped or separated, depending on a project's needs.

### Example 9-8 Use Generic Libraries in Business Logic

```
-- Centrally managed JavaScript code library in the LIBRARY_OWNER
schema
CREATE MLE MODULE library_owner.common_ml_module
  LANGUAGE JAVASCRIPT USING BFILE(js_src_dir, 'common_ml_lib.js');
/

-- The grant makes the module available to APP_OWNER
GRANT EXECUTE ON library_owner.common_ml_module TO app_owner;

-- Business logic in schema APP_OWNER makes use of the common ML
library
CREATE MLE MODULE app_owner.helper_module LANGUAGE JAVASCRIPT AS

export function setDebugLevel(level) {
  // ... JavaScript code ...
}

// ... additional functionality ...
/

-- A generic MLE environment references both APP_OWNER's as well as
-- LIBRARY_OWNER's MLE modules
CREATE MLE ENV app_owner.all_dependencies_env imports (
  'helperModule' module helper_module
  'commonML'      module library_owner.common_ml_module
);

-- The main application module imports the helper module for common
tasks
-- as well as the common machine learning module provided by
```



```
LIBRARY_OWNER
CREATE MLE MODULE app_owner.orders_module LANGUAGE JAVASCRIPT AS

import { setDebugLevel } from "helperModule";
import { churnRate }      from "commonML";

export function newOrder() {

    setDebugLevel("INFO");
    // ... JavaScript code ...
}

export function delivery() {
    setDebugLevel("WARN");
    // ... JavaScript code ...
}

export function estimateChurnRate() {

    // This function was imported from the common ML library
    // (an MLE module not stored in APP_OWNERS schema)
    const cr = churnRate();

    // ... JavaScript code ...
}

// ... additional functionality ...
/

-- the call specification is all the end-users need to be granted
-- access to. The execute privilege to this definer rights procedure
-- (created and executed with the app_owner's database privileges)
-- is all that needs granting to the application role.

CREATE app_owner.package orders_pkg AS

    PROCEDURE new_order AUTHID DEFINER AS
        MLE MODULE orders_module
        ENV all_dependencies_env
        SIGNATURE 'newOrder()';

    PROCEDURE delivery AUTHID DEFINER AS
        MLE MODULE orders_module
        ENV all_dependencies_env
        SIGNATURE 'delivery()';

    FUNCTION estimateChurnRate AUTHID DEFINER AS
        MLE MODULE orders_module
        ENV all_dependencies_env
        SIGNATURE 'estimateChurnRate()';

END order_pkg;
/
```

# A

## MLE Type Conversions

Supported conversions between JavaScript and PL/SQL, SQL, and JSON data types.

JavaScript target types include both native JavaScript types as well as SQL wrapper types. Supported SQL types are converted to the analogous JavaScript type by default where such a natural counterpart exists. If a conversion is attempted and there is no corresponding JavaScript type, conversion to a native JavaScript type is not supported and values are instead converted to the corresponding SQL wrapper type by default.

### Note:

MLE does not provide functionality to prevent information loss that might occur between conversions from a customized database character representation to the built-in string representation of JavaScript (UTF-16).

### See Also:

- [Server-Side JavaScript API Documentation](#) for information about using `mle-js-bindings` to change the default mappings when exchanging values between PL/SQL and JavaScript
- [Server-Side JavaScript API Documentation](#) for information on how to use `mle-js-plsqltypes` to create SQL wrapper types, such as `OracleNumber`
- [Server-Side JavaScript API Documentation](#) for information on using `mle-js-oracledb` to override the default conversions (as seen in [Table A-1](#)) when fetching column values from a `SELECT` statement

### Date Conversions

JavaScript `Date` represents an instant (i.e., a single moment in time). Conversions can occur between the instant type `Date` and PL/SQL types `DATE` and `TIMESTAMP` that do not have time zone information. Conversions between instants on the JavaScript side and `DATE` and `TIMESTAMP` on the other side are handled as follows:

- When converting a `Date` to a `TIMESTAMP` or `DATE`, the instant is converted to a timezone-aware datetime value in the current session time zone. The local datetime portion of this value is stored in the target `DATE` or `TIMESTAMP` value.
- To convert a `TIMESTAMP` or `DATE` to a timezone-aware `Date`, the source datetime value is interpreted to be in the session time zone and is converted into an instant according to the session time zone.

**Table A-1 Supported Mappings from SQL and PL/SQL Types to JavaScript Types**

SQL Type	JavaScript Types (Bold Font Signifies Default)
NUMBER	<b>number</b> OracleNumber
BINARY_FLOAT	<b>number</b>
BINARY_DOUBLE	<b>number</b>
BINARY_INTEGER <sup>1</sup>	<b>number</b>
BOOLEAN	<b>boolean</b>
VARCHAR2	<b>string</b>
NVARCHAR2	<b>string</b>
CHAR	<b>string</b>
NCHAR	<b>string</b>
CLOB	<b>OracleCLOB</b> string
NCLOB	<b>OracleCLOB</b> string
BLOB	<b>OracleBLOB</b> Uint8Array (TypedArray)
RAW	<b>Uint8Array</b> (TypedArray)
DATE	<b>Date</b> OracleDate
TIMESTAMP	<b>Date</b> OracleTimestamp
TIMESTAMP WITH TIME ZONE	<b>Date</b> OracleTimestampTZ
TIMESTAMP WITH LOCAL TIME ZONE	<b>Date</b> OracleTimestampTZ
INTERVAL YEAR TO MONTH	OracleIntervalYearToMonth
INTERVAL DAY TO SECOND	OracleIntervalDayToSecond
NULL <sup>2</sup>	<b>null</b>
JSON	any (object, array, null) <sup>3</sup>

<sup>1</sup> Note that BINARY\_INTEGER is a PL/SQL type and not supported in SQL. MLE only supports BINARY\_INTEGER on PL/SQL interfaces.

<sup>2</sup> Although not technically a type, MLE converts a SQL NULL value into a JavaScript null value and vice versa. This is so that JavaScript can indicate to the database that a value passed into the database is absent (for example, the return value of a function or an IN bind in a SQL statement).

<sup>3</sup> See [Table A-3](#) for details

**Table A-2 Supported Mappings from JavaScript Types to SQL Types**

JavaScript Type	SQL Type
number boolean OracleNumber	NUMBER
number	BINARY_FLOAT
number	BINARY_DOUBLE
number boolean	BINARY_INTEGER
number OracleNumber boolean	BOOLEAN
string	VARCHAR2
string	CHAR
string	NCHAR
string	NVARCHAR2
string OracleCLOB	CLOB
string OracleCLOB	NCLOB
string	UROWID
Uint8Array OracleBlob	BLOB
UintArray	RAW
Date OracleDate	DATE
Date OracleTimestamp	TIMESTAMP
Date OracleTimestampTZ	TIMESTAMP WITH (LOCAL) TIME ZONE
OracleIntervalYearToMonth	INTERVAL YEAR TO MONTH
OracleIntervalDayToSecond	INTERVAL DAY TO SECOND
null	NULL (any supported SQL type)

**Table A-2 (Cont.) Supported Mappings from JavaScript Types to SQL Types**

JavaScript Type	SQL Type
number	JSON <sup>2</sup>
string	
boolean	
null	
undefined	
Date	
Uint8Array	
OracleNumber	
OracleDate	
OracleTimestamp	
OracleTimestampTZ	
OracleIntervalYearToMonth	
OracleIntervalDayToSecond	
object <sup>1</sup>	

<sup>1</sup> JavaScript objects and arrays that do not match one of the classes listed above

<sup>2</sup> See [Table A-4](#) for details

### JSON Mapping Support

Values of the SQL `JSON` type can be converted to and from JavaScript values. The type mapping between the SQL `JSON` type and JavaScript values is aligned with type mappings employed by the `node-oracledb` driver.



#### Note:

For more information about `node-oracledb` and the `JSON` data type, see the [node-oracledb documentation](#).

Values of the SQL `JSON` type are converted to JavaScript values as follows:

- If the `JSON` value is an object, it is converted to an equivalent JavaScript object by converting all fields of the input object.
- If the `JSON` value is an array, it is converted to an equivalent JavaScript array by converting all elements of the input array.
- If the `JSON` value is a scalar value, it is converted to an equivalent value according to the type mapping in [Table A-3](#).

**Table A-3 Mapping from JSON Attribute Types and Values to JavaScript Types and Values**

JSON Attribute Type or Value	JavaScript Type or Value
null	null
false	false

**Table A-3 (Cont.) Mapping from JSON Attribute Types and Values to JavaScript Types and Values**

JSON Attribute Type or Value	JavaScript Type or Value
true	true
NUMBER	Number
VARCHAR2	String
RAW	Uint8Array
CLOB	String
BLOB	UintArray
DATE	Date
TIMESTAMP	Date
INTERVAL YEAR TO MONTH	OracleIntervalYearToMonth
INTERVAL DAY TO SECOND	OracleIntervalDayToSecond
BINARY_DOUBLE	Number
BINARY_FLOAT	Number
Arrays	Array
Objects	A plain JavaScript Object

Values of a JavaScript type are converted to the SQL `JSON` type as follows:

- If the JavaScript value matches one of the scalar types in the first column of [Table A-4](#), it is converted to a JSON value of the corresponding type.
- If the JavaScript value is an array, it is converted to a JSON array by converting all elements of the array. Note that `Uint8Array` values are treated as scalars as opposed to arrays, so `Uint8Array` values are converted to the type `RAW`, not to a JSON array.
- If the JavaScript value is an object that is neither an array nor matches any of the JavaScript types/ classes listed in [Table A-4](#), it is converted to a JSON object. Each field of the object is converted according to the appropriate mappings.

**Table A-4 Mapping from JavaScript Types and Values to JSON Attributes and Values**

JavaScript Type or Value	JSON Attribute Type or Value
null	null
undefined	null
string	VARCHAR2
true	true
false	false
Uint8Array	RAW
Number	NUMBER
Date	DATE
OracleNumber	NUMBER
OracleDate	DATE
OracleTimestamp	TIMESTAMP
OracleTimestampTZ	TIMESTAMP WITH TIME ZONE

**Table A-4 (Cont.) Mapping from JavaScript Types and Values to JSON Attributes and Values**

<b>JavaScript Type or Value</b>	<b>JSON Attribute Type or Value</b>
OracleIntervalYearToMonth	INTERVAL YEAR TO MONTH
OracleIntervalDayToSecond	INTERVAL DAY TO SECOND
Array	Array
Object	Object

# Index

## A

---

async/await interface, [5-10](#)

## B

---

bind variables

IN, [6-12](#)

IN OUT, [6-12](#)

OUT, [6-12](#)

built-in modules, [6-32](#)

accessing, [5-10](#)

mle-encode-base64, [2-11](#)

mle-js-bindings, [2-11](#)

mle-js-fetch, [2-11](#)

mle-js-oracledb, [2-11](#)

mle-js-plsqltypes, [2-11](#)

## C

---

call specification, [1-6](#), [5-1](#), [5-11](#)

creating, [5-2](#)

elements of, [5-4](#)

collections

creating, [7-7](#)

dropping, [7-11](#)

opening, [7-9](#)

during creation, [7-7](#)

committing operations (transactions), [7-32](#)

creating a collection, [7-7](#)

creating documents, [7-12](#)

## D

---

Data Guard, [2-1](#)

data guide for a collection, getting, [7-31](#)

DBMS\_MLE, [1-5](#)

EVAL procedure

arguments of, [1-5](#)

debugging

See post-execution debugging

debugpoints, [1-9](#)

elements of, [8-2](#)

specifying, [8-2](#)

deleting a collection

See dropping a collection

dictionary views

USER\_MLE\_ENVS view, [2-20](#)

USER\_MLE\_ENVS\_IMPORTS view, [2-20](#)

USER\_MLE\_MODULES view, [2-12](#)

USER\_SOURCE view, [2-11](#)

Direct Fetch, [6-6](#)

arrays, [6-7](#)

objects, [6-8](#)

documents

creating, [7-12](#)

finding in collections, [7-20](#)

inserting into collections, [7-15](#)

removing from a collection, [7-27](#)

replacing in collections, [7-26](#)

saving into collections, [7-17](#)

DRCP (database resident connection pool), [1-3](#)

dropping a collection, [7-11](#)

dynamic execution, [1-5](#), [3-1](#)

workflow, [3-2](#)

## E

---

ECMAScript

available features, [6-1](#)

execution context, [1-8](#)

standard, [1-3](#), [1-4](#), [2-6](#)

environment, [2-1](#)

execution context, [1-5](#), [1-8](#), [9-6](#)

## F

---

finding documents in collections, [7-20](#)

## G

---

global variables, [5-10](#)

## H

---

handling transactions, [7-32](#)



**I**

indexing documents in a collection, [7-29](#)  
 initialization parameters  
   MAX\_STRING\_SIZE, [1-3](#)  
   MLE\_PROG\_LANGUAGES, [9-5](#)  
 inlined call specification, [5-1](#), [5-11](#)  
   creating, [5-7](#)  
   elements of, [5-9](#)  
 inserting documents into collections, [7-15](#)

**J**

JavaScript, [1-3](#)  
   global variables, [5-10](#)  
   implementation of, [1-4](#)  
   invoking, [1-5](#)  
   loading from files, [3-3](#)  
   providing inline, [3-2](#)

**L**

language options, [2-18](#)  
   js.console, [2-18](#)  
   js.polyglot-builtin, [2-18](#)  
   js.strict, [2-18](#)

**M**

MAX\_STRING\_SIZE initialization parameter, [1-3](#)  
 methods  
   count(), [7-19](#), [7-20](#)  
   create\_context(), [9-8](#)  
   createCollection(), [7-7](#)  
   createIndex(), [7-29](#)  
   drop(), [7-11](#)  
   dropIndex(), [7-29](#)  
   eval(), [1-5](#)  
   execute(), [6-3](#)  
   filter(), [7-19](#), [7-20](#)  
   find(), [7-20](#)  
   getCollectionNames(), [7-10](#)  
   getContentAsString, [7-31](#)  
   getCursor(), [7-19](#), [7-20](#)  
   getDataGuide, [7-31](#)  
   getOne(), [7-19](#), [7-20](#)  
   hasNext(), [7-20](#)  
   headerOnly(), [7-19](#), [7-20](#)  
   key(), [7-19](#), [7-20](#)  
   keys(), [7-19](#), [7-20](#)  
   limit(), [7-19](#), [7-20](#)  
   openCollection(), [7-9](#), [7-10](#)  
   read and write, [7-19](#)  
   remove(), [7-19](#), [7-27](#)

methods (*continued*)  
   replaceOne(), [7-19](#), [7-26](#)  
   replaceOneAndGet(), [7-19](#), [7-26](#)  
   reset\_package(), [9-6](#)  
   save(), [7-17](#)  
   saveAndGet(), [7-17](#)  
   skip(), [7-19](#), [7-20](#)  
   terminal and nonterminal, [7-19](#)  
   version(), [7-19](#), [7-20](#)

MLE, [1-1–1-3](#)  
   call specification, [5-1](#)  
   environment, [2-1](#)  
   inlined call specification, [5-1](#)  
   module, [2-3](#), [4-1](#)  
     See also module  
 MLE JavaScript SQL driver, [2-11](#), [6-1](#)  
   selecting data, [6-6](#)  
 MLE LANGUAGE clause, [5-7](#)  
 MLE\_PROG\_LANGUAGES initialization  
   parameter, [9-5](#)  
 mle-js-fetch, [1-4](#)  
 mle-js-oracledb  
   See MLE JavaScript SQL driver  
 module, [2-3](#)  
   creating, [2-4](#)  
   importing, [2-6](#), [4-1](#)  
   managing, [2-3](#)  
   naming, [2-3](#)  
 module call, [1-6](#)  
 Multilingual Engine  
   See MLE

**N**

node package manager, [1-2](#)  
 nonterminal method  
   definition, [7-20](#)  
 NPM (node package manager), [1-2](#)

**O**

opening a collection  
   during creation, [7-7](#)  
 opening existing collections, [7-9](#)  
 ORA\_SECURECONFIG audit policy, [9-10](#)

**P**

post-execution debugging, [1-9](#), [8-2](#)  
 privileges, [1-4](#), [9-8](#)  
   ALTER ANY MLE, [9-3](#)  
   COLLECT DEBUG INFO, [9-4](#)  
   CREATE ANY MLE, [9-3](#)  
   CREATE ANY PROCEDURE, [9-3](#)  
   CREATE MLE, [9-3](#)

privileges (*continued*)

- CREATE PROCEDURE, [9-3](#)
- DROP ANY MLE, [9-3](#)
- EXECUTE DYNAMIC MLE, [9-2](#)
- EXECUTE ON JAVASCRIPT, [9-2](#)
- INHERIT PRIVILEGES, [9-13](#)
- SODA\_APP, [9-2](#)

---

**R**

---

- read methods, [7-19](#)
- removing documents from a collection, [7-27](#)
- replacing documents in collections, [7-26](#)
- ResultSet object, [6-3](#), [6-6](#)

---

**S**

---

- saving documents into collections, [7-17](#)
- SBOM, [9-14](#)
- Simple Oracle Document Access (SODA), [7-1](#)
- single-byte character set, [2-5](#)
- Smart-DB approach, [1-2](#)

- SODA, [7-1](#)
- software bill of material (SBOM), [9-14](#)

---

**T**

---

- terminal method
  - definition, [7-20](#)
- transaction handling, [7-32](#)

---

**U**

---

- Unicode Standard, [2-5](#)
- USER\_MLE\_ENV\_IMPORTS view, [2-21](#)
- USER\_MLE\_ENVS view, [2-20](#)
- USER\_MLE\_MODULES view, [2-12](#)
- USER\_SOURCE view, [2-11](#)

---

**W**

---

- write methods, [7-19](#)