Oracle® AI Database

Database PL/SQL Language Reference

26ai
G43964-01
October 2025

Oracle AI Database Database PL/SQL Language Reference, 26ai

G43964-01

Copyright © 1996, 2025, Oracle and/or its affiliates.

Primary Author: Sarah Hirschfeld

Contributing Authors: P. Huey, L. Jayapalan

Contributors: D. Alpern, S. Agrawal, M. Bach, H. Baer, S. Castledine, T. Chang, B. Cheng, R. Dani, R. Decker, M. DiPaolo, C. Iyer, A. Kruglikov, N. Le, W. Li, P. Miller, V. Moore, T. Raney, R. Rajagopalan, C. Saxon, I. Stocks, C. Wetherell, S. Wolicki, G. Viswanathan, M. Yang

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

Audience i
Documentation Accessibility i
Related Documents ii
Conventions ii
Syntax Descriptions iii

1 Changes in This Release for Oracle Database PL/SQL Language Reference

New Features in Release 26ai for Oracle AI Database PL/SQL Language Reference 1
- SQL BOOLEAN Data Type 1
- SQL VECTOR Data Type 3
- IF [NOT] EXISTS Syntax Support 3
- Extended CASE Controls 4
- JSON Constructor and JSON_VALUE Support of PL/SQL Aggregate Types 5
- SQL Transpiler 5
- Oracle AI Database 23ai, Release Update 23.7 6
  - Jaccard Distance Metric 6
  - BINARY Vector Support 6
  - VECTOR Dimension-wise Arithmetic Support 6
- Oracle AI Database 26ai, Release Update 23.8 6
  - SPARSE Vector Support 7
- Oracle AI Database 26ai, Release Update 23.26.0 7
  - New RESETTABLE Clause 7

Deprecated Features 7
Desupported Features 7

2 Overview of PL/SQL

Advantages of PL/SQL 1
- Tight Integration with SQL 1
- High Performance 2
- High Productivity 2

Copyright © 1996, 2025, Oracle and/or its affiliates.

Portability 2
Scalability 3
Manageability 3
Support for Object-Oriented Programming 3
Main Features of PL/SQL 3
Error Handling 4
Blocks 4
Variables and Constants 5
Subprograms 5
Packages 5
Triggers 5
Input and Output 6
Data Abstraction 7
Cursors 7
Composite Variables 7
Using the %ROWTYPE Attribute 7
Using the %TYPE Attribute 8
Abstract Data Types 8
Control Statements 8
Conditional Compilation 9
Processing a Query Result Set One Row at a Time 9
Architecture of PL/SQL 10
PL/SQL Engine 10
PL/SQL Units and Compilation Parameters 11
Protecting Sensitive Information in PL/SQL 12

3 PL/SQL Language Fundamentals

Character Sets 1
Database Character Set 1
National Character Set 3
About Data-Bound Collation 3
Lexical Units 4
Delimiters 4
Identifiers 5
Reserved Words and Keywords 6
Predefined Identifiers 6
User-Defined Identifiers 6
Literals 10
Pragmas 11
Comments 12
Single-Line Comments 13

Copyright © 1996, 2025, Oracle and/or its affiliates.

Multiline Comments 13
Whitespace Characters Between Lexical Units 14
Declarations 15
NOT NULL Constraint 15
Declaring Variables 16
Declaring Constants 16
Initial Values of Variables and Constants 17
Declaring Items using the %TYPE Attribute 18
References to Identifiers 19
Scope and Visibility of Identifiers 20
Assigning Values to Variables 24
Assigning Values to Variables with the Assignment Statement 25
Assigning Values to Variables with the SELECT INTO Statement 25
Assigning Values to Variables as Parameters of a Subprogram 26
Assigning Values to BOOLEAN Variables 27
Expressions 27
Concatenation Operator 28
Operator Precedence 28
Logical Operators 31
Short-Circuit Evaluation 35
Comparison Operators 36
IS [NOT] NULL Operator 36
Relational Operators 37
LIKE Operator 39
BETWEEN Operator 40
IN Operator 41
BOOLEAN Expressions 42
CASE Expressions 43
Simple CASE Expression 43
Searched CASE Expression 45
SQL Functions in PL/SQL Expressions 47
Static Expressions 48
PLS_INTEGER Static Expressions 51
BOOLEAN Static Expressions 51
VARCHAR2 Static Expressions 52
Static Constants 52
Error-Reporting Functions 54
Conditional Compilation 54
How Conditional Compilation Works 54
Preprocessor Control Tokens 55
Selection Directives 55
Error Directives 56

Copyright © 1996, 2025, Oracle and/or its affiliates.

Inquiry Directives 56
DBMS_DB_VERSION Package 60
Conditional Compilation Examples 60
Retrieving and Printing Post-Processed Source Text 62
Conditional Compilation Directive Restrictions 62

4 PL/SQL Data Types

SQL Data Types 1
Different Maximum Sizes 2
Additional PL/SQL Constants for BINARY_FLOAT and BINARY_DOUBLE 2
Additional PL/SQL Subtypes of BINARY_FLOAT and BINARY_DOUBLE 3
BOOLEAN Data Type 3
JSON Data Type 5
PL/SQL and JSON Type Conversions 5
VECTOR Data Type 14
VECTOR Operations Supported by PL/SQL 17
VECTOR Data Type PL/SQL Code Examples 18
CHAR and VARCHAR2 Variables 23
Assigning or Inserting Too-Long Values 23
Declaring Variables for Multibyte Characters 24
Differences Between CHAR and VARCHAR2 Data Types 24
LONG and LONG RAW Variables 26
ROWID and UROWID Variables 26
PLS_INTEGER and BINARY_INTEGER Data Types 27
Preventing PLS_INTEGER Overflow 27
Predefined PLS_INTEGER Subtypes 28
SIMPLE_INTEGER Subtype of PLS_INTEGER 29
SIMPLE_INTEGER Overflow Semantics 29
Expressions with Both SIMPLE_INTEGER and Other Operands 30
Integer Literals in SIMPLE_INTEGER Range 30
User-Defined PL/SQL Subtypes 30
Unconstrained Subtypes 31
Constrained Subtypes 32
Subtypes with Base Types in Same Data Type Family 33

5 PL/SQL Control Statements

Conditional Selection Statements 1
IF THEN Statement 1
IF THEN ELSE Statement 3
IF THEN ELSIF Statement 4

Copyright © 1996, 2025, Oracle and/or its affiliates.

Simple CASE Statement 6
Searched CASE Statement 8
LOOP Statements 9
Basic LOOP Statement 10
FOR LOOP Statement Overview 10
FOR LOOP Iterand 12
Iterand Mutability 14
Multiple Iteration Controls 14
Stepped Range Iteration Controls 15
Single Expression Iteration Controls 17
Collection Iteration Controls 18
Cursor Iteration Controls 21
Using Dynamic SQL in Iteration Controls 21
Stopping and Skipping Predicate Clauses 22
WHILE LOOP Statement 23
Sequential Control Statements 24
GOTO Statement 24
NULL Statement 24

6 PL/SQL Collections and Records

Collection Types 2
Associative Arrays 4
Declaring Associative Array Constants 7
NLS Parameter Values Affect Associative Arrays Indexed by String 8
Changing NLS Parameter Values After Populating Associative Arrays 9
Indexes of Data Types Other Than VARCHAR2 9
Passing Associative Arrays to Remote Databases 9
Appropriate Uses for Associative Arrays 10
Varrays (Variable-Size Arrays) 10
Appropriate Uses for Varrays 12
Nested Tables 13
Important Differences Between Nested Tables and Arrays 16
Appropriate Uses for Nested Tables 16
Collection Constructors 16
Qualified Expressions Overview 18
Assigning Values to Collection Variables 23
Data Type Compatibility 24
Assigning Null Values to Varray or Nested Table Variables 24
Assigning Set Operation Results to Nested Table Variables 25
Multidimensional Collections 27
Collection Comparisons 29

Copyright © 1996, 2025, Oracle and/or its affiliates.

Comparing Varray and Nested Table Variables to NULL 29
Comparing Nested Tables for Equality and Inequality 30
Comparing Nested Tables with SQL Multiset Conditions 31
Collection Methods 32
DELETE Collection Method 33
TRIM Collection Method 36
EXTEND Collection Method 37
EXISTS Collection Method 39
FIRST and LAST Collection Methods 39
FIRST and LAST Methods for Associative Array 40
FIRST and LAST Methods for Varray 41
FIRST and LAST Methods for Nested Table 42
COUNT Collection Method 43
COUNT Method for Varray 44
COUNT Method for Nested Table 44
LIMIT Collection Method 45
PRIOR and NEXT Collection Methods 46
Collection Types Defined in Package Specifications 48
Record Variables 50
Initial Values of Record Variables 51
Declaring Record Constants 51
RECORD Types 52
Declaring Items using the %ROWTYPE Attribute 56
Declaring a Record Variable that Always Represents Full Row 56
Declaring a Record Variable that Can Represent Partial Row 58
%ROWTYPE Attribute and Virtual Columns 59
%ROWTYPE Attribute and Invisible Columns 60
Assigning Values to Record Variables 61
Assigning Values to RECORD Type Variables Using Qualified Expressions 62
Assigning One Record Variable to Another 63
Assigning Full or Partial Rows to Record Variables 65
Using SELECT INTO to Assign a Row to a Record Variable 66
Using FETCH to Assign a Row to a Record Variable 66
Using SQL Statements to Return Rows in PL/SQL Record Variables 68
Assigning NULL to a Record Variable 68
Record Comparisons 69
Inserting Records into Tables 69
Updating Rows with Records 70
Restrictions on Record Inserts and Updates 71

Copyright © 1996, 2025, Oracle and/or its affiliates.

7 PL/SQL Static SQL

Description of Static SQL 1
Statements 1
Pseudocolumns 3
CURRVAL and NEXTVAL in PL/SQL 3
Cursors Overview 5
Implicit Cursors 6
SQL%ISOPEN Attribute: Is the Cursor Open? 7
SQL%FOUND Attribute: Were Any Rows Affected? 7
SQL%NOTFOUND Attribute: Were No Rows Affected? 8
SQL%ROWCOUNT Attribute: How Many Rows Were Affected? 8
Explicit Cursors 9
Declaring and Defining Explicit Cursors 9
Opening and Closing Explicit Cursors 10
Fetching Data with Explicit Cursors 11
Variables in Explicit Cursor Queries 13
When Explicit Cursor Queries Need Column Aliases 15
Explicit Cursors that Accept Parameters 16
Explicit Cursor Attributes 20
Processing Query Result Sets 24
Processing Query Result Sets With SELECT INTO Statements 25
Handling Single-Row Result Sets 25
Handling Large Multiple-Row Result Sets 25
Processing Query Result Sets With Cursor FOR LOOP Statements 25
Processing Query Result Sets With Explicit Cursors, OPEN, FETCH, and CLOSE 28
Processing Query Result Sets with Subqueries 28
Cursor Variables 30
Creating Cursor Variables 31
Opening and Closing Cursor Variables 32
Fetching Data with Cursor Variables 33
Assigning Values to Cursor Variables 35
Variables in Cursor Variable Queries 35
Querying a Collection 37
Cursor Variable Attributes 38
Cursor Variables as Subprogram Parameters 38
Cursor Variables as Host Variables 41
CURSOR Expressions 42
Transaction Processing and Control 43
COMMIT Statement 44
ROLLBACK Statement 46
SAVEPOINT Statement 47

Copyright © 1996, 2025, Oracle and/or its affiliates.

Implicit Rollbacks 49
SET TRANSACTION Statement 49
Overriding Default Locking 50
LOCK TABLE Statement 51
SELECT FOR UPDATE and FOR UPDATE Cursors 51
Simulating CURRENT OF Clause with ROWID Pseudocolumn 52
Autonomous Transactions 53
Advantages of Autonomous Transactions 55
Transaction Context 55
Transaction Visibility 55
Declaring Autonomous Routines 55
Controlling Autonomous Transactions 57
Entering and Exiting Autonomous Routines 57
Committing and Rolling Back Autonomous Transactions 57
Savepoints 58
Avoiding Errors with Autonomous Transactions 58
Autonomous Triggers 58
Invoking Autonomous Functions from SQL 60

8 PL/SQL Dynamic SQL

When You Need Dynamic SQL 1
Native Dynamic SQL 2
EXECUTE IMMEDIATE Statement 2
OPEN FOR, FETCH, and CLOSE Statements 8
Repeated Placeholder Names in Dynamic SQL Statements 10
Dynamic SQL Statement is Not Anonymous Block or CALL Statement 10
Dynamic SQL Statement is Anonymous Block or CALL Statement 10
DBMS_SQL Package 11
DBMS_SQL.RETURN_RESULT Procedure 12
DBMS_SQL.GET_NEXT_RESULT Procedure 14
DBMS_SQL.TO_REFCURSOR Function 15
DBMS_SQL.TO_CURSOR_NUMBER Function 17
SQL Injection 18
SQL Injection Techniques 18
Statement Modification 19
Statement Injection 20
Data Type Conversion 22
Guards Against SQL Injection 23
Bind Variables 23
Validation Checks 25

Copyright © 1996, 2025, Oracle and/or its affiliates.

Explicit Format Models 26

9 PL/SQL Subprograms

Reasons to Use Subprograms 1
Nested, Package, and Standalone Subprograms 2
Subprogram Invocations 2
Subprogram Properties 3
Subprogram Parts 3
Additional Parts for Functions 5
RETURN Statement 6
RETURN Statement in Function 6
RETURN Statement in Procedure 8
RETURN Statement in Anonymous Block 8
Forward Declaration 8
Subprogram Parameters 9
Formal and Actual Subprogram Parameters 9
Formal Parameters of Constrained Subtypes 11
Subprogram Parameter Passing Methods 13
Subprogram Parameter Modes 14
Subprogram Parameter Aliasing 19
Subprogram Parameter Aliasing with Parameters Passed by Reference 20
Subprogram Parameter Aliasing with Cursor Variable Parameters 22
Default Values for IN Subprogram Parameters 22
Positional, Named, and Mixed Notation for Actual Parameters 25
Subprogram Invocation Resolution 27
Overloaded Subprograms 29
Formal Parameters that Differ Only in Numeric Data Type 30
Subprograms that You Cannot Overload 31
Subprogram Overload Errors 32
Recursive Subprograms 35
Subprogram Side Effects 37
PL/SQL Function Result Cache 37
Enabling Result-Caching for a Function 38
Developing Applications with Result-Cached Functions 40
Requirements for Result-Cached Functions 40
Examples of Result-Cached Functions 41
Result-Cached Application Configuration Parameters 41
Result-Cached Recursive Function 43
Advanced Result-Cached Function Topics 43
Rules for a Cache Hit 43
Result Cache Bypass 44

Copyright © 1996, 2025, Oracle and/or its affiliates.

Making Result-Cached Functions Handle Session-Specific Settings 44
Making Result-Cached Functions Handle Session-Specific Application Contexts 45
Choosing Result-Caching Granularity 46
Result Caches in Oracle RAC Environment 48
Result Cache Management 48
Hot-Patching PL/SQL Units on Which Result-Cached Functions Depend 50
PL/SQL Functions that SQL Statements Can Invoke 51
Invoker's Rights and Definer's Rights (AUTHID Property) 52
Granting Roles to PL/SQL Packages and Standalone Subprograms 54
IR Units Need Template Objects 54
Connected User Database Links in DR Units 54
External Subprograms 55

10 PL/SQL Triggers

Overview of Triggers 1
Reasons to Use Triggers 2
DML Triggers 4
Conditional Predicates for Detecting Triggering DML Statement 5
INSTEAD OF DML Triggers 5
Compound DML Triggers 10
Compound DML Trigger Structure 10
Compound DML Trigger Restrictions 11
Performance Benefit of Compound DML Triggers 11
Using Compound DML Triggers with Bulk Insertion 12
Using Compound DML Triggers to Avoid Mutating-Table Error 14
Triggers for Ensuring Referential Integrity 15
Foreign Key Trigger for Child Table 17
UPDATE and DELETE RESTRICT Trigger for Parent Table 18
UPDATE and DELETE SET NULL Trigger for Parent Table 19
DELETE CASCADE Trigger for Parent Table 19
UPDATE CASCADE Trigger for Parent Table 20
Triggers for Complex Constraint Checking 21
Triggers for Complex Security Authorizations 22
Triggers for Transparent Event Logging 23
Triggers for Deriving Column Values 23
Triggers for Building Complex Updatable Views 24
Triggers for Fine-Grained Access Control 27
Correlation Names and Pseudorecords 28
OBJECT_VALUE Pseudocolumn 32
System Triggers 34
SCHEMA Triggers 34

Copyright © 1996, 2025, Oracle and/or its affiliates.

DATABASE Triggers 35
INSTEAD OF CREATE Triggers 35
Subprograms Invoked by Triggers 36
Trigger Compilation, Invalidation, and Recompilation 37
Exception Handling in Triggers 37
Trigger Design Guidelines 39
Trigger Restrictions 40
Trigger Size Restriction 41
Trigger LONG and LONG RAW Data Type Restrictions 41
Mutating-Table Restriction 41
Order in Which Triggers Fire 45
Trigger Enabling and Disabling 46
Trigger Changing and Debugging 46
Triggers and Oracle Database Data Transfer Utilities 47
Triggers for Publishing Events 48
Event Attribute Functions 49
Event Attribute Functions for Database Event Triggers 53
Event Attribute Functions for Client Event Triggers 54
Views for Information About Triggers 59

11 PL/SQL Packages

What is a Package? 1
Reasons to Use Packages 2
Package Specification 3
Appropriate Public Items 3
Creating Package Specifications 4
Package Body 5
Package Instantiation and Initialization 7
Package State 7
SERIALLY_REUSABLE Packages 8
Creating SERIALLY_REUSABLE Packages 9
SERIALLY_REUSABLE Package Work Unit 9
Explicit Cursors in SERIALLY_REUSABLE Packages 10
Package Writing Guidelines 12
Package Example 14
How STANDARD Package Defines the PL/SQL Environment 18

12 PL/SQL Error Handling

Compile-Time Warnings 2
DBMS_WARNING Package 3

Copyright © 1996, 2025, Oracle and/or its affiliates.

Overview of Exception Handling 5
Exception Categories 6
Advantages of Exception Handlers 7
Guidelines for Avoiding and Handling Exceptions 8
Internally Defined Exceptions 9
Predefined Exceptions 10
User-Defined Exceptions 13
Redeclared Predefined Exceptions 13
Raising Exceptions Explicitly 15
RAISE Statement 15
Raising User-Defined Exception with RAISE Statement 15
Raising Internally Defined Exception with RAISE Statement 16
Reraising Current Exception with RAISE Statement 17
RAISE_APPLICATION_ERROR Procedure 18
Exception Propagation 19
Propagation of Exceptions Raised in Declarations 22
Propagation of Exceptions Raised in Exception Handlers 23
Unhandled Exceptions 27
Retrieving Error Code and Error Message 27
Continuing Execution After Handling Exceptions 28
Retrying Transactions After Handling Exceptions 30
Handling Errors in Distributed Queries 31

13 PL/SQL Optimization and Tuning

PL/SQL Optimizer 1
Subprogram Inlining 2
Candidates for Tuning 4
Minimizing CPU Overhead 5
Tune SQL Statements 5
Tune Function Invocations in Queries 5
Tune Subprogram Invocations 7
Tune Loops 8
Tune Computation-Intensive PL/SQL Code 9
Use Data Types that Use Hardware Arithmetic 9
Avoid Constrained Subtypes in Performance-Critical Code 10
Minimize Implicit Data Type Conversion 10
Use SQL Character Functions 11
Put Least Expensive Conditional Tests First 11
Bulk SQL and Bulk Binding 11
FORALL Statement 12
Using FORALL Statements for Sparse Collections 15

Copyright © 1996, 2025, Oracle and/or its affiliates.

Unhandled Exceptions in FORALL Statements 18
Handling FORALL Exceptions Immediately 19
Handling FORALL Exceptions After FORALL Statement Completes 20
Getting Number of Rows Affected by FORALL Statement 23
BULK COLLECT Clause 25
SELECT INTO Statement with BULK COLLECT Clause 25
FETCH Statement with BULK COLLECT Clause 33
RETURNING INTO Clause with BULK COLLECT Clause 37
Using FORALL Statement and BULK COLLECT Clause Together 39
Client Bulk-Binding of Host Arrays 41
Chaining Pipelined Table Functions for Multiple Transformations 41
Overview of Table Functions 42
Creating Pipelined Table Functions 43
Pipelined Table Functions as Transformation Functions 45
Chaining Pipelined Table Functions 47
Fetching from Results of Pipelined Table Functions 47
Passing CURSOR Expressions to Pipelined Table Functions 48
DML Statements on Pipelined Table Function Results 51
NO_DATA_NEEDED Exception 51
Overview of Polymorphic Table Functions 53
Polymorphic Table Function Definition 54
Polymorphic Table Function Implementation 54
Polymorphic Table Function Invocation 55
Variadic Pseudo-Operators 56
COLUMNS Pseudo-Operator 57
Polymorphic Table Function Compilation and Execution 57
Polymorphic Table Function Optimization 57
Skip_col Polymorphic Table Function Example 58
To_doc Polymorphic Table Function Example 61
Implicit_echo Polymorphic Table Function Example 65
Updating Large Tables in Parallel 67
Collecting Data About User-Defined Identifiers 68
Profiling and Tracing PL/SQL Programs 68
Compiling PL/SQL Units for Native Execution 70
Determining Whether to Use PL/SQL Native Compilation 70
How PL/SQL Native Compilation Works 71
Dependencies, Invalidation, and Revalidation 71
Setting Up a New Database for PL/SQL Native Compilation 71
Compiling the Entire Database for PL/SQL Native or Interpreted Compilation 72

Copyright © 1996, 2025, Oracle and/or its affiliates.

14 PL/SQL Language Elements

ACCESSIBLE BY Clause 3
AGGREGATE Clause 8
Assignment Statement 9
AUTONOMOUS_TRANSACTION Pragma 12
Basic LOOP Statement 13
Block 15
Call Specification 24
CASE Statement 27
CLOSE Statement 30
Collection Method Invocation 31
Collection Variable Declaration 34
Comment 39
COMPILE Clause 40
Constant Declaration 42
CONTINUE Statement 44
COVERAGE Pragma 46
Cursor FOR LOOP Statement 49
Cursor Variable Declaration 51
Datatype Attribute 54
DEFAULT COLLATION Clause 55
DELETE Statement Extension 57
DEPRECATE Pragma 57
DETERMINISTIC Clause 67
Element Specification 68
EXCEPTION_INIT Pragma 74
Exception Declaration 76
Exception Handler 77
EXECUTE IMMEDIATE Statement 79
EXIT Statement 82
Explicit Cursor Declaration and Definition 84
Expression 88
FETCH Statement 98
FOR LOOP Statement 100
FORALL Statement 103
Formal Parameter Declaration 105
Function Declaration and Definition 108
GOTO Statement 110
IF Statement 113
Implicit Cursor Attribute 115
INLINE Pragma 117

Copyright © 1996, 2025, Oracle and/or its affiliates.

Invoker’s Rights and Definer’s Rights Clause 118
INSERT Statement Extension 119
Iterator 121
Named Cursor Attribute 127
NULL Statement 130
OPEN Statement 130
OPEN FOR Statement 132
PARALLEL_ENABLE Clause 134
PIPE ROW Statement 137
PIPELINED Clause 138
Procedure Declaration and Definition 141
Qualified Expression 143
RAISE Statement 148
Record Variable Declaration 149
RESETTABLE Clause 151
RESTRICT_REFERENCES Pragma 152
RESULT_CACHE Clause 154
RETURN Statement 156
RETURNING INTO Clause 157
%ROWTYPE Attribute 160
Scalar Variable Declaration 162
SELECT INTO Statement 163
SERIALLY_REUSABLE Pragma 166
SHARD_ENABLE Clause 166
SHARING Clause 168
SQL_MACRO Clause 170
SQLCODE Function 179
SQLERRM Function 180
SUPPRESSES_WARNING_6009 Pragma 182
%TYPE Attribute 187
UDF Pragma 189
UPDATE Statement Extensions 189
WHILE LOOP Statement 191

15 SQL Statements for Stored PL/SQL Units

ALTER FUNCTION Statement 2
ALTER LIBRARY Statement 4
ALTER PACKAGE Statement 6
ALTER PROCEDURE Statement 8
ALTER TRIGGER Statement 10
ALTER TYPE Statement 12

Copyright © 1996, 2025, Oracle and/or its affiliates.

CREATE FUNCTION Statement 24
CREATE LIBRARY Statement 30
CREATE PACKAGE Statement 34
CREATE PACKAGE BODY Statement 38
CREATE PROCEDURE Statement 42
CREATE TRIGGER Statement 47
CREATE TYPE Statement 67
CREATE TYPE BODY Statement 79
DROP FUNCTION Statement 83
DROP LIBRARY Statement 85
DROP PACKAGE Statement 86
DROP PROCEDURE Statement 88
DROP TRIGGER Statement 89
DROP TYPE Statement 90
DROP TYPE BODY Statement 92

A PL/SQL Source Text Wrapping

PL/SQL Source Text Wrapping Limitations A-2
PL/SQL Source Text Wrapping Guidelines A-2
Wrapping PL/SQL Source Text with PL/SQL Wrapper Utility A-2
Wrapping PL/SQL Source Text with DBMS_DDL Subprograms A-8

B PL/SQL Name Resolution

Qualified Names and Dot Notation B-1
Column Name Precedence B-3
Differences Between PL/SQL and SQL Name Resolution Rules B-5
Resolution of Names in Static SQL Statements B-6
What is Capture? B-7
- Outer Capture B-7
- Same-Scope Capture B-7
- Inner Capture B-7

Avoiding Inner Capture in SELECT and DML Statements B-8
- Qualifying References to Attributes and Methods B-9
- Qualifying References to Row Expressions B-10

C PL/SQL Program Limits

Copyright © 1996, 2025, Oracle and/or its affiliates.

D PL/SQL Reserved Words and Keywords

E PL/SQL Predefined Data Types

Index

Copyright © 1996, 2025, Oracle and/or its affiliates.

List of Examples

1-1	Calling a PL/SQL Function with BOOLEAN Argument from SQL	2
1-2	CREATE PROCEDURE with IF NOT EXISTS	4
2-1	PL/SQL Block Structure	4
2-2	Processing Query Result Rows One at a Time	9
3-1	Valid Case-Insensitive Reference to Quoted User-Defined Identifier	8
3-2	Invalid Case-Insensitive Reference to Quoted User-Defined Identifier	8
3-3	Reserved Word as Quoted User-Defined Identifier	9
3-4	Neglecting Double Quotation Marks	9
3-5	Neglecting Case-Sensitivity	10
3-6	Single-Line Comments	13
3-7	Multiline Comments	14
3-8	Whitespace Characters Improving Source Text Readability	14
3-9	Variable Declaration with NOT NULL Constraint	15
3-10	Variables Initialized to NULL Values	15
3-11	Scalar Variable Declarations	16
3-12	Constant Declarations	16
3-13	Variable and Constant Declarations with Initial Values	17
3-14	Variable Initialized to NULL by Default	17
3-15	Declaring Variable of Same Type as Column	18
3-16	Declaring Variable of Same Type as Another Variable	19
3-17	Scope and Visibility of Identifiers	20
3-18	Qualifying Redeclared Global Identifier with Block Label	21
3-19	Qualifying Identifier with Subprogram Name	21
3-20	Duplicate Identifiers in Same Scope	22
3-21	Declaring Same Identifier in Different Units	22
3-22	Label and Subprogram with Same Name in Same Scope	23
3-23	Block with Multiple and Duplicate Labels	23
3-24	Assigning Values to Variables with Assignment Statement	25
3-25	Assigning Value to Variable with SELECT INTO Statement	26
3-26	Assigning Value to Variable as IN OUT Subprogram Parameter	26
3-27	Assigning Value to BOOLEAN Variable	27
3-28	Concatenation Operator	28
3-29	Concatenation Operator with NULL Operands	28
3-30	Controlling Evaluation Order with Parentheses	29
3-31	Expression with Nested Parentheses	29
3-32	Improving Readability with Parentheses	29

Copyright © 1996, 2025, Oracle and/or its affiliates.

3-33	Operator Precedence	30
3-34	Procedure Prints BOOLEAN Variable	31
3-35	AND Operator	31
3-36	OR Operator	32
3-37	NOT Operator	33
3-38	NULL Value in Unequal Comparison	34
3-39	NULL Value in Equal Comparison	34
3-40	NOT NULL Equals NULL	35
3-41	Changing Evaluation Order of Logical Operators	35
3-42	Short-Circuit Evaluation	36
3-43	Relational Operators in Expressions	37
3-44	LIKE Operator in Expression	39
3-45	Escape Character in Pattern	40
3-46	BETWEEN Operator in Expressions	40
3-47	IN Operator in Expressions	41
3-48	IN Operator with Sets with NULL Values	41
3-49	Equivalent BOOLEAN Expressions	42
3-50	Simple CASE Expression	43
3-51	Simple CASE Expression with WHEN NULL	44
3-52	Simple CASE Expression with List of selector_values	44
3-53	Simple CASE Expression with Dangling Predicates	45
3-54	Searched CASE Expression	46
3-55	Searched CASE Expression with WHEN ... IS NULL	46
3-56	Static Constants	53
3-57	Predefined Inquiry Directives	57
3-58	Displaying Values of PL/SQL Compilation Parameters	58
3-59	PLSQL_CCFLAGS Assigns Value to Itself	59
3-60	Code for Checking Database Version	60
3-61	Compiling Different Code for Different Database Versions	60
3-62	Displaying Post-Processed Source Textsource text	62
3-63	Using Conditional Compilation Directive in the Definition of a Package Specification	63
3-64	Using Conditional Compilation Directive in the Formal Parameter List of a Subprogram	63
4-1	Printing BOOLEAN Values	4
4-2	Convert a JSON Object to PL/SQL Records	7
4-3	Convert a PL/SQL Record to a JSON Object	8
4-4	Convert a JSON Object to an Index by PLS_INTEGER Collection	9
4-5	Convert a JSON Object to a Nested Table Collection	9

Copyright © 1996, 2025, Oracle and/or its affiliates.

4-6	Convert an Index by PLS_INTEGER Collection to a JSON Object	10
4-7	Convert a Nested Table to a JSON Object	10
4-8	Convert a JSON Array to an Index by PLS_INTEGER Collection	11
4-9	Convert a JSON Array to a Varray	11
4-10	Convert a JSON Array to a Nested Table	12
4-11	Convert a Varray to a JSON Array	12
4-12	Convert a JSON Object to an Associative Array	13
4-13	Convert an Associative Array to a JSON Object	14
4-14	Use the VECTOR Data Type with PL/SQL	19
4-15	Use the VECTOR Data Type with a PL/SQL Trigger	20
4-16	Use Vector Distance Functions with PL/SQL	20
4-17	Use Shorthand Distance Operators	21
4-18	Perform Arithmetic Operations on Vectors	22
4-19	Declare DENSE and SPARSE Vectors in PL/SQL	22
4-20	CHAR and VARCHAR2 Blank-Padding Difference	25
4-21	PLS_INTEGER Calculation Raises Overflow Exception	27
4-22	Preventing Overflow	28
4-23	Violating Constraint of SIMPLE_INTEGER Subtype	29
4-24	User-Defined Unconstrained Subtypes Show Intended Use	31
4-25	User-Defined Constrained Subtype Detects Out-of-Range Values	32
4-26	Implicit Conversion Between Constrained Subtypes with Same Base Type	33
4-27	Implicit Conversion Between Subtypes with Base Types in Same Family	33
5-1	IF THEN Statement	2
5-2	IF THEN ELSE Statement	3
5-3	Nested IF THEN ELSE Statements	4
5-4	IF THEN ELSIF Statement	5
5-5	IF THEN ELSIF Statement Simulates Simple CASE Statement	6
5-6	Simple CASE Statement	7
5-7	Simple CASE Statement with Dangling Predicates	7
5-8	Searched CASE Statement	8
5-9	EXCEPTION Instead of ELSE Clause in CASE Statement	9
5-10	FOR LOOP Statement Tries to Change Index Value	12
5-11	Outside Statement References FOR LOOP Statement Index	12
5-12	FOR LOOP Statement Index with Same Name as Variable	12
5-13	FOR LOOP Statement References Variable with Same Name as Index	13
5-14	Nested FOR LOOP Statements with Same Index Name	13
5-15	Using Multiple Iteration Controls	14

Copyright © 1996, 2025, Oracle and/or its affiliates.

5-16	FOR LOOP Statements Range Iteration Control	15
5-17	Reverse FOR LOOP Statements Range Iteration Control	16
5-18	Stepped Range Iteration Controls	16
5-19	STEP Clause in FOR LOOP Statement	16
5-20	Simple Step Filter Using FOR LOOP Stepped Range Iterator	17
5-21	Single Expression Iteration Control	17
5-22	VALUES OF Iteration Control	19
5-23	INDICES OF Iteration Control	20
5-24	PAIRS OF Iteration Control	20
5-25	Cursor Iteration Controls	21
5-26	Using Dynamic SQL As An Iteration Control	22
5-27	Using Dynamic SQL As An Iteration Control In a Qualified Expression	22
5-28	Using FOR LOOP Stopping Predicate Clause	22
5-29	Using FOR LOOP Skipping Predicate Clause	23
5-30	NULL Statement Showing No Action	24
5-31	NULL Statement as Placeholder During Subprogram Creation	25
5-32	NULL Statement in ELSE Clause of Simple CASE Statement	25
6-1	Associative Array Indexed by String	5
6-2	Function Returns Associative Array Indexed by PLS_INTEGER	6
6-3	Declaring Associative Array Constant	7
6-4	Varray (Variable-Size Array)	11
6-5	Nested Table of Local Type	13
6-6	Nested Table of Standalone Type	15
6-7	Initializing Collection (Varray) Variable to Empty	17
6-8	Iterator Choice Association in Qualified Expressions	20
6-9	Index Iterator Choice Association in Qualified Expressions	21
6-10	Sequence Iterator Choice Association in Qualified Expressions	21
6-11	Assigning Values to Associative Array Type Variables Using Qualified Expressions	21
6-12	Assigning values to a RECORD Type Variables using Qualified Expressions	22
6-13	Assigning Values to a VARRAY Type using Qualified Expressions	23
6-14	Data Type Compatibility for Collection Assignment	24
6-15	Assigning Null Value to Nested Table Variable	25
6-16	Assigning Set Operation Results to Nested Table Variable	25
6-17	Two-Dimensional Varray (Varray of Varrays)	27
6-18	Nested Tables of Nested Tables and Varrays of Integers	27
6-19	Nested Tables of Associative Arrays and Varrays of Strings	28
6-20	Comparing Varray and Nested Table Variables to NULL	29

Copyright © 1996, 2025, Oracle and/or its affiliates.

6-21 Comparing Nested Tables for Equality and Inequality 30
6-22 Comparing Nested Tables with SQL Multiset Conditions 31
6-23 DELETE Method with Nested Table 34
6-24 DELETE Method with Associative Array Indexed by String 35
6-25 TRIM Method with Nested Table 37
6-26 EXTEND Method with Nested Table 38
6-27 EXISTS Method with Nested Table 39
6-28 FIRST and LAST Values for Associative Array Indexed by PLS_INTEGER 40
6-29 FIRST and LAST Values for Associative Array Indexed by String 40
6-30 Printing Varray with FIRST and LAST in FOR LOOP 41
6-31 Printing Nested Table with FIRST and LAST in FOR LOOP 42
6-32 COUNT and LAST Values for Varray 44
6-33 COUNT and LAST Values for Nested Table 44
6-34 LIMIT and COUNT Values for Different Collection Types 45
6-35 PRIOR and NEXT Methods 47
6-36 Printing Elements of Sparse Nested Table 47
6-37 Identically Defined Package and Local Collection Types 49
6-38 Identically Defined Package and Standalone Collection Types 49
6-39 Declaring Record Constant 51
6-40 Declaring Record Constant 52
6-41 RECORD Type Definition and Variable Declaration 53
6-42 RECORD Type with RECORD Field (Nested Record) 53
6-43 RECORD Type with Varray Field 54
6-44 Identically Defined Package and Local RECORD Types 55
6-45 %ROWTYPE Variable Represents Full Database Table Row 56
6-46 %ROWTYPE Variable Does Not Inherit Initial Values or Constraints 57
6-47 %ROWTYPE Variable Represents Partial Database Table Row 58
6-48 %ROWTYPE Variable Represents Join Row 59
6-49 Inserting %ROWTYPE Record into Table (Wrong) 59
6-50 Inserting %ROWTYPE Record into Table (Right) 60
6-51 %ROWTYPE Affected by Making Invisible Column Visible 61
6-52 Assigning Values to RECORD Type Variables Using Qualified Expressions 62
6-53 Assigning Record to Another Record of Same RECORD Type 64
6-54 Assigning %ROWTYPE Record to RECORD Type Record 64
6-55 Assigning Nested Record to Another Record of Same RECORD Type 65
6-56 SELECT INTO Assigns Values to Record Variable 66
6-57 FETCH Assigns Values to Record that Function Returns 67

Copyright © 1996, 2025, Oracle and/or its affiliates.

6-58	UPDATE Statement Assigns Values to Record Variable	68
6-59	Assigning NULL to Record Variable	68
6-60	Initializing Table by Inserting Record of Default Values	69
6-61	Updating Rows with Record	71
7-1	Static SQL Statements	2
7-2	CURRVAL and NEXTVAL Pseudocolumns	4
7-3	SQL%FOUND Implicit Cursor Attribute	7
7-4	SQL%ROWCOUNT Implicit Cursor Attribute	8
7-5	Explicit Cursor Declaration and Definition	10
7-6	FETCH Statements Inside LOOP Statements	11
7-7	Fetching Same Explicit Cursor into Different Variables	12
7-8	Variable in Explicit Cursor Query—No Result Set Change	13
7-9	Variable in Explicit Cursor Query—Result Set Change	14
7-10	Explicit Cursor with Virtual Column that Needs Alias	15
7-11	Explicit Cursor that Accepts Parameters	16
7-12	Cursor Parameters with Default Values	17
7-13	Adding Formal Parameter to Existing Cursor	19
7-14	%ISOPEN Explicit Cursor Attribute	21
7-15	%FOUND Explicit Cursor Attribute	21
7-16	%NOTFOUND Explicit Cursor Attribute	22
7-17	%ROWCOUNT Explicit Cursor Attribute	23
7-18	Implicit Cursor FOR LOOP Statement	26
7-19	Explicit Cursor FOR LOOP Statement	27
7-20	Passing Parameters to Explicit Cursor FOR LOOP Statement	27
7-21	Cursor FOR Loop References Virtual Columns	28
7-22	Subquery in FROM Clause of Parent Query	28
7-23	Correlated Subquery	29
7-24	Cursor Variable Declarations	31
7-25	Cursor Variable with User-Defined Return Type	32
7-26	Fetching Data with Cursor Variables	33
7-27	Fetching from Cursor Variable into Collections	34
7-28	Variable in Cursor Variable Query—No Result Set Change	35
7-29	Variable in Cursor Variable Query—Result Set Change	36
7-30	Querying a Collection with Static SQL	38
7-31	Procedure to Open Cursor Variable for One Query	39
7-32	Opening Cursor Variable for Chosen Query (Same Return Type)	40
7-33	Opening Cursor Variable for Chosen Query (Different Return Types)	40

Copyright © 1996, 2025, Oracle and/or its affiliates.

7-34	Cursor Variable as Host Variable in Pro*C Client Program	42
7-35	CURSOR Expression	42
7-36	COMMIT Statement with COMMENT and WRITE Clauses	45
7-37	ROLLBACK Statement	46
7-38	SAVEPOINT and ROLLBACK Statements	48
7-39	Reusing SAVEPOINT with ROLLBACK	48
7-40	SET TRANSACTION Statement in Read-Only Transaction	50
7-41	FETCH with FOR UPDATE Cursor After COMMIT Statement	52
7-42	Simulating CURRENT OF Clause with ROWID Pseudocolumn	53
7-43	Declaring Autonomous Function in Package	56
7-44	Declaring Autonomous Standalone Procedure	56
7-45	Declaring Autonomous PL/SQL Block	56
7-46	Autonomous Trigger Logs INSERT Statements	59
7-47	Autonomous Trigger Uses Native Dynamic SQL for DDL	60
7-48	Invoking Autonomous Function	61
8-1	Invoking Subprogram from Dynamic PL/SQL Block	4
8-2	Dynamically Invoking Subprogram with BOOLEAN Formal Parameter	4
8-3	Dynamically Invoking Subprogram with RECORD Formal Parameter	5
8-4	Dynamically Invoking Subprogram with Assoc. Array Formal Parameter	6
8-5	Dynamically Invoking Subprogram with Nested Table Formal Parameter	7
8-6	Dynamically Invoking Subprogram with Varray Formal Parameter	7
8-7	Uninitialized Variable Represents NULL in USING Clause	8
8-8	Native Dynamic SQL with OPEN FOR, FETCH, and CLOSE Statements	9
8-9	Querying a Collection with Native Dynamic SQL	9
8-10	Repeated Placeholder Names in Dynamic PL/SQL Block	11
8-11	DBMS_SQL.RETURN_RESULT Procedure	13
8-12	DBMS_SQL.GET_NEXT_RESULT Procedure	14
8-13	Switching from DBMS_SQL Package to Native Dynamic SQL	16
8-14	Switching from Native Dynamic SQL to DBMS_SQL Package	17
8-15	Setup for SQL Injection Examples	18
8-16	Procedure Vulnerable to Statement Modification	19
8-17	Procedure Vulnerable to Statement Injection	20
8-18	Procedure Vulnerable to SQL Injection Through Data Type Conversion	22
8-19	Bind Variables Guarding Against SQL Injection	24
8-20	Validation Checks Guarding Against SQL Injection	25
8-21	Explicit Format Models Guarding Against SQL Injection	27
9-1	Declaring, Defining, and Invoking a Simple PL/SQL Procedure	4

Copyright © 1996, 2025, Oracle and/or its affiliates.

9-2	Declaring, Defining, and Invoking a Simple PL/SQL Function	5
9-3	Execution Resumes After RETURN Statement in Function	6
9-4	Function Where Not Every Execution Path Leads to RETURN Statement	7
9-5	Function Where Every Execution Path Leads to RETURN Statement	7
9-6	Execution Resumes After RETURN Statement in Procedure	8
9-7	Execution Resumes After RETURN Statement in Anonymous Block	8
9-8	Nested Subprograms Invoke Each Other	9
9-9	Formal Parameters and Actual Parameters	11
9-10	Actual Parameter Inherits Only NOT NULL from Subtype	12
9-11	Actual Parameter and Return Value Inherit Only Range From Subtype	12
9-12	Function Implicitly Converts Formal Parameter to Constrained Subtype	13
9-13	Avoiding Implicit Conversion of Actual Parameters	14
9-14	Parameter Values Before, During, and After Procedure Invocation	16
9-15	OUT and IN OUT Parameter Values After Exception Handling	18
9-16	OUT Formal Parameter of Record Type with Non-NULL Default Value	19
9-17	Aliasing from Global Variable as Actual Parameter	20
9-18	Aliasing from Same Actual Parameter for Multiple Formal Parameters	21
9-19	Aliasing from Cursor Variable Subprogram Parameters	22
9-20	Procedure with Default Parameter Values	23
9-21	Function Provides Default Parameter Value	23
9-22	Adding Subprogram Parameter Without Changing Existing Invocations	24
9-23	Equivalent Invocations with Different Notations in Anonymous Block	26
9-24	Equivalent Invocations with Different Notations in SELECT Statements	27
9-25	Resolving PL/SQL Procedure Names	28
9-26	Overloaded Subprogram	30
9-27	Overload Error Causes Compile-Time Error	33
9-28	Overload Error Compiles Successfully	33
9-29	Invoking Subprogram in Causes Compile-Time Error	33
9-30	Correcting Overload Error in	33
9-31	Invoking Subprogram in	33
9-32	Package Specification Without Overload Errors	34
9-33	Improper Invocation of Properly Overloaded Subprogram	34
9-34	Implicit Conversion of Parameters Causes Overload Error	34
9-35	Implicit Conversion to Number Successful	34
9-36	Implicit Conversion to BOOLEAN or Number Causes Overload Error	35
9-37	Recursive Function Returns n Factorial (n!)	36
9-38	Recursive Function Returns nth Fibonacci Number	36

Copyright © 1996, 2025, Oracle and/or its affiliates.

9-39	Declaring and Defining Result-Cached Function	39
9-40	Result-Cached Function Returns Configuration Parameter Setting	42
9-41	Result-Cached Function Handles Session-Specific Settings	45
9-42	Result-Cached Function Handles Session-Specific Application Context	46
9-43	Caching One Name at a Time (Finer Granularity)	47
9-44	Caching Translated Names One Language at a Time (Coarser Granularity)	47
9-45	Database Link in a DR Unit	55
9-46	PL/SQL Anonymous Block Invokes External Procedure	56
9-47	PL/SQL Standalone Procedure Invokes External Procedure	56
9-48	Implement JavaScript External Procedure	57
10-1	Trigger Uses Conditional Predicates to Detect Triggering Statement	5
10-2	INSTEAD OF Trigger	6
10-3	INSTEAD OF Trigger on Nested Table Column of View	7
10-4	Compound Trigger Logs Changes to One Table in Another Table	12
10-5	Compound Trigger Avoids Mutating-Table Error	15
10-6	Foreign Key Trigger for Child Table	17
10-7	UPDATE and DELETE RESTRICT Trigger for Parent Table	18
10-8	UPDATE and DELETE SET NULL Trigger for Parent Table	19
10-9	DELETE CASCADE Trigger for Parent Table	20
10-10	UPDATE CASCADE Trigger for Parent Table	20
10-11	Trigger Checks Complex Constraints	22
10-12	Trigger Enforces Security Authorizations	23
10-13	Trigger Derives New Column Values	24
10-14	Trigger Logs Changes to EMPLOYEES.SALARY	29
10-15	Conditional Trigger Prints Salary Change Information	30
10-16	Trigger Modifies CLOB Columns	31
10-17	Trigger with REFERENCING Clause	32
10-18	Trigger References OBJECT_VALUE Pseudocolumn	33
10-19	BEFORE Statement Trigger on Sample Schema HR	34
10-20	AFTER Statement Trigger on Database	35
10-21	Trigger Monitors Logons	35
10-22	INSTEAD OF CREATE Trigger on Schema	36
10-23	Trigger Invokes Java Subprogram	36
10-24	Trigger Cannot Handle Exception if Remote Database is Unavailable	38
10-25	Workaround for	38
10-26	Trigger Causes Mutating-Table Error	43
10-27	Update Cascade	44

Copyright © 1996, 2025, Oracle and/or its affiliates.

10-28	Viewing Information About Triggers	59
11-1	Simple Package Specification	4
11-2	Passing Associative Array to Standalone Subprogram	5
11-3	Matching Package Specification and Body	6
11-4	Creating SERIALLY_REUSABLE Packages	9
11-5	Effect of SERIALLY_REUSABLE Pragma	10
11-6	Cursor in SERIALLY_REUSABLE Package Open at Call Boundary	10
11-7	Separating Cursor Declaration and Definition in Package	12
11-8	ACCESSIBLE BY Clause	13
11-9	Creating emp_admin Package	14
12-1	Setting Value of PLSQL_WARNINGS Compilation Parameter	3
12-2	Displaying and Setting PLSQL_WARNINGS with DBMS_WARNING Subprograms	4
12-3	Single Exception Handler for Multiple Exceptions	7
12-4	Locator Variables for Statements that Share Exception Handler	8
12-5	Naming Internally Defined Exception	10
12-6	Anonymous Block Handles ZERO_DIVIDE	12
12-7	Anonymous Block Avoids ZERO_DIVIDE	12
12-8	Anonymous Block Handles ROWTYPE_MISMATCH	12
12-9	Redeclared Predefined Identifier	13
12-10	Declaring, Raising, and Handling User-Defined Exception	15
12-11	Explicitly Raising Predefined Exception	16
12-12	Reraising Exception	17
12-13	Raising User-Defined Exception with RAISE_APPLICATION_ERROR	18
12-14	Exception that Propagates Beyond Scope is Handled	21
12-15	Exception that Propagates Beyond Scope is Not Handled	21
12-16	Exception Raised in Declaration is Not Handled	22
12-17	Exception Raised in Declaration is Handled by Enclosing Block	22
12-18	Exception Raised in Exception Handler is Not Handled	23
12-19	Exception Raised in Exception Handler is Handled by Invoker	24
12-20	Exception Raised in Exception Handler is Handled by Enclosing Block	24
12-21	Exception Raised in Exception Handler is Not Handled	25
12-22	Exception Raised in Exception Handler is Handled by Enclosing Block	26
12-23	Displaying SQLCODE and SQLERRM Values	28
12-24	Exception Handler Runs and Execution Ends	29
12-25	Exception Handler Runs and Execution Continues	29
12-26	Retrying Transaction After Handling Exception	30
13-1	Specifying that Subprogram Is To Be Inlined	3

Copyright © 1996, 2025, Oracle and/or its affiliates.

13-2 Specifying that Overloaded Subprogram Is To Be Inlined 3
13-3 Specifying that Subprogram Is Not To Be Inlined 4
13-4 PRAGMA INLINE ... 'NO' Overrides PRAGMA INLINE ... 'YES' 4
13-5 Nested Query Improves Performance 6
13-6 NOCOPY Subprogram Parameters 8
13-7 DELETE Statement in FOR LOOP Statement 13
13-8 DELETE Statement in FORALL Statement 13
13-9 Time Difference for INSERT Statement in FOR LOOP and FORALL Statements 14
13-10 FORALL Statement for Subset of Collection 15
13-11 FORALL Statements for Sparse Collection and Its Subsets 15
13-12 Handling FORALL Exceptions Immediately 19
13-13 Handling FORALL Exceptions After FORALL Statement Completes 21
13-14 Showing Number of Rows Affected by Each DELETE in FORALL 23
13-15 Showing Number of Rows Affected by Each INSERT SELECT in FORALL 24
13-16 Bulk-Selecting Two Database Columns into Two Nested Tables 26
13-17 Bulk-Selecting into Nested Table of Records 27
13-18 SELECT BULK COLLECT INTO Statement with Unexpected Results 28
13-19 Cursor Workaround for 29
13-20 Second Collection Workaround for 30
13-21 Limiting Bulk Selection with ROWNUM, SAMPLE, and FETCH FIRST 32
13-22 Bulk-Fetching into Two Nested Tables 33
13-23 Bulk-Fetching into Nested Table of Records 35
13-24 Limiting Bulk FETCH with LIMIT 36
13-25 Returning Deleted Rows in Two Nested Tables 38
13-26 Returning NEW and OLD Values of Updated Rows 38
13-27 DELETE with RETURN BULK COLLECT INTO in FORALL Statement 39
13-28 DELETE with RETURN BULK COLLECT INTO in FOR LOOP Statement 40
13-29 Anonymous Block Bulk-Binds Input Host Array 41
13-30 Creating and Invoking Pipelined Table Function 44
13-31 Pipelined Table Function Transforms Each Row to Two Rows 46
13-32 Fetching from Results of Pipelined Table Functions 47
13-33 Pipelined Table Function with Two Cursor Variable Parameters 48
13-34 Pipelined Table Function as Aggregate Function 50
13-35 Pipelined Table Function Does Not Handle NO_DATA_NEEDED 52
13-36 Pipelined Table Function Handles NO_DATA_NEEDED 53
13-37 Skip_col Polymorphic Table Function Example 58
13-38 To_doc Polymorphic Table Function Example 62

Copyright © 1996, 2025, Oracle and/or its affiliates.

13-39	Implicit_echo Polymorphic Table Function Example	65
14-1	Restricting Access to Top-Level Procedures in the Same Schema	5
14-2	Restricting Access to a Unit Name of Any Kind	6
14-3	Restricting Access to a Stored Procedure	7
14-4	Nested, Labeled Basic LOOP Statements with EXIT WHEN Statements	14
14-5	Nested, Unabeled Basic LOOP Statements with EXIT WHEN Statements	14
14-6	External Function Example	26
14-7	CONTINUE Statement in Basic LOOP Statement	45
14-8	CONTINUE WHEN Statement in Basic LOOP Statement	45
14-9	Marking a Single Basic Block as Infeasible to Test for Coverage	47
14-10	Marking a Line Range as Infeasible to Test for Coverage	48
14-11	Marking Entire Units or Individual Subprograms as Infeasible to Test for Coverage	48
14-12	Marking Internal Subprogram as Infeasible to Test for Coverage	48
14-13	Enabling the Deprecation Warnings	59
14-14	Deprecation of a PL/SQL Package	60
14-15	Deprecation of a PL/SQL Package with a Custom Warning	60
14-16	Deprecation of a PL/SQL Procedure	61
14-17	Deprecation of an Overloaded Procedure	61
14-18	Deprecation of a Constant and of an Exception	61
14-19	Using Conditional Compilation to Deprecate Entities in Some Database Releases	62
14-20	Deprecation of an Object Type	62
14-21	Deprecation of a Member Function in an Object Type Specification	63
14-22	Deprecation of Inherited Object Types	63
14-23	Deprecation Only Applies to Top Level Subprogram	65
14-24	Misplaced DEPRECATE Pragma	65
14-25	Mismatch of the Element Name and the DEPRECATE Pragma Argument	66
14-26	Basic LOOP Statement with EXIT Statement	83
14-27	Basic LOOP Statement with EXIT WHEN Statement	83
14-28	EXIT WHEN Statement in FOR LOOP Statement	101
14-29	EXIT WHEN Statement in Inner FOR LOOP Statement	101
14-30	CONTINUE WHEN Statement in Inner FOR LOOP Statement	102
14-31	GOTO Statement	111
14-32	Incorrect Label Placement	111
14-33	GOTO Statement Goes to Labeled NULL Statement	112
14-34	GOTO Statement Transfers Control to Enclosing Block	112
14-35	GOTO Statement Cannot Transfer Control into IF Statement	113
14-36	Creating a RESETTABLE Package Body	152

Copyright © 1996, 2025, Oracle and/or its affiliates.

14-37	Emp_doc: Using a Scalar Macro to Convert Columns into a JSON or XML Document	172
14-38	Env: Using a Scalar Macro in a Scalar Expression	175
14-39	Budget : Using a Table Macro in a Table Expression	175
14-40	Take: Using a Table Macro with a Polymorphic View	176
14-41	Range : Using a Table Macro in a Table Expression	176
14-42	Enabling the PLW-6009 Warning	183
14-43	SUPPRESSES_WARNING_6009 Pragma in a Procedure	183
14-44	SUPPRESSES_WARNING_6009 Pragma in a Function	184
14-45	SUPPRESSES_WARNING_6009 Pragma in an Overloaded Subprogram in a Package Specification	184
14-46	SUPPRESSES_WARNING_6009 Pragma in a Forward Declaration in a Package Body	185
14-47	SUPPRESSES_WARNING_6009 Pragma in Object Type Methods	186
14-48	WHILE LOOP Statements	192
15-1	Recompiling a Function	4
15-2	Recompiling a Library	5
15-3	Recompiling a Package	7
15-4	Recompiling a Procedure	9
15-5	Disabling Triggers	12
15-6	Enabling Triggers	12
15-7	Adding a Member Function	20
15-8	Adding a Collection Attribute	21
15-9	Increasing the Number of Elements of a Collection Type	21
15-10	Increasing the Length of a Collection Type	21
15-11	Recompiling a Type	21
15-12	Recompiling a Type Specification	21
15-13	Evolving and Resetting an ADT	22
15-14	Creating a Function	27
15-15	Creating Aggregate Functions	28
15-16	Package Procedure in a Function	29
15-17	Creating Functions Using MLE Module and Inline Call Specifications	29
15-18	Creating a Library	33
15-19	Specifying an External Procedure Agent	34
15-20	Creating the Specification for the emp_mgmt Package	37
15-21	Creating the emp_mgmt Package Body	40
15-22	Creating a Procedure	45
15-23	Creating an External Procedure	46
15-24	Creating Procedures Using MLE Module and Inline Call Specifications	46

Copyright © 1996, 2025, Oracle and/or its affiliates.

15-25 ADT Examples 74
15-26 Creating a Subtype 74
15-27 Creating a Type Hierarchy 75
15-28 Creating a Varray Type 75
15-29 Creating a Non-Persistable Nested Array 75
15-30 Creating a Non-Persistable Object Type 76
15-31 Creating a Non-Persistable Varray 76
15-32 Creating a Nested Table Type 76
15-33 Creating a Nested Table Type Containing a Varray 76
15-34 Constructor Example 77
15-35 Creating a Member Method 77
15-36 Creating a Static Method 78
15-37 Dropping a Function 85
15-38 Dropping a Library 86
15-39 Dropping a Package 87
15-40 Dropping a Procedure 89
15-41 Dropping a Trigger 90
15-42 Dropping an ADT 92
15-43 Dropping an ADT Body 93
A-1 SQL File with Two Wrappable PL/SQL Units A-3
A-2 Wrapping File with PL/SQL Wrapper Utility A-4
A-3 Running Wrapped File and Viewing Wrapped PL/SQL Units A-5
A-4 Creating Wrapped Package Body with CREATE_WRAPPED Procedure A-9
A-5 Viewing Package with Wrapped Body and Invoking Package Procedure A-10
B-1 Qualified Names B-2
B-2 Variable Name Interpreted as Column Name Causes Unintended Result B-3
B-3 Fixing with Different Variable Name B-4
B-4 Fixing with Block Label B-4
B-5 Subprogram Name for Name Resolution B-4
B-6 Inner Capture of Column Reference B-7
B-7 Inner Capture of Attribute Reference B-8
B-8 Qualifying ADT Attribute References B-9
B-9 Qualifying References to Row Expressions B-10

Copyright © 1996, 2025, Oracle and/or its affiliates.

List of Figures

2-1	PL/SQL Engine	10
6-1	Varray of Maximum Size 10 with 7 Elements	11
6-2	Array and Nested Table	16
7-1	Transaction Control Flow	54
9-1	How PL/SQL Compiler Resolves Invocations	28
12-1	Exception Does Not Propagate	19
12-2	Exception Propagates from Inner Block to Outer Block	20
12-3	PL/SQL Returns Unhandled Exception Error to Host Environment	20

Copyright © 1996, 2025, Oracle and/or its affiliates.

List of Tables

2-1	PL/SQL I/O-Processing Packages	6
2-2	PL/SQL Compilation Parameters	11
3-1	Punctuation Characters in Every Database Character Set	2
3-2	PL/SQL Delimiters	4
3-3	Operator Precedence	28
3-4	Logical Truth Table	31
3-5	Relational Operators	37
3-6	Operators Allowed in Static Expressions	48
4-1	Data Types with Different Maximum Sizes in PL/SQL and SQL	2
4-2	Predefined PL/SQL BINARY_FLOAT and BINARY_DOUBLE Constants	3
4-3	Predefined Subtypes of PLS_INTEGER Data Type	28
6-1	PL/SQL Collection Types	2
6-2	Collection Methods	32
9-1	PL/SQL Subprogram Parameter Modes	14
9-2	PL/SQL Subprogram Parameter Modes Characteristics	14
9-3	PL/SQL Actual Parameter Notations	26
9-4	Finer and Coarser Caching Granularity	46
10-1	Conditional Predicates	5
10-2	Compound Trigger Timing-Point Sections	11
10-3	Constraints and Triggers for Ensuring Referential Integrity	16
10-4	OLD and NEW Pseudorecord Field Values	28
10-5	System-Defined Event Attributes	50
10-6	Database Event Triggers	54
10-7	Client Event Triggers	55
12-1	Compile-Time Warning Categories	2
12-2	Exception Categories	6
12-3	PL/SQL Predefined Exceptions	11
13-1	Profiling and Tracing Tools Summary	68
14-1	Iterand Implicit Type Defaults	124
14-2	Summary of Possible Sharing Attributes by Application Common Object Type	168
C-1	PL/SQL Compiler Limits	C-1
D-1	PL/SQL Reserved Words	D-1
D-2	PL/SQL Keywords	D-2

Copyright © 1996, 2025, Oracle and/or its affiliates.

Preface

Oracle Database PL/SQL Language Reference describes and explains how to use PL/SQL, the Oracle procedural extension of SQL.

Topics

- Audience
- Documentation Accessibility
- Related Documents
- Conventions
- Syntax Descriptions

Audience

Oracle Database PL/SQL Language Reference is intended for anyone who is developing PL/SQL-based applications for either an Oracle Database or an Oracle TimesTen In-Memory Database, including:

- Programmers
- Systems analysts
- Project managers
- Database administrators

To use this document effectively, you need a working knowledge of:

- Oracle Database
- Structured Query Language (SQL)
- Basic programming concepts such as `IF-THEN` statements, loops, procedures, and functions

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Related Documents

For more information, see these documents in the Oracle Database documentation set:

- *Oracle AI Database SQL Language Reference*
- *Oracle Database PL/SQL Packages and Types Reference*
- *Oracle AI Database JSON Developer's Guide*
- *Oracle AI Database SODA for PL/SQL Developer's Guide*
- *Oracle Database Development Guide*
- *Oracle Database Administrator's Guide*
- *Oracle Database SecureFiles and Large Objects Developer's Guide*
- *Oracle Database Object-Relational Developer's Guide*
- *Oracle Database Concepts*
- *Oracle AI Database Performance Tuning Guide*
- *Oracle AI Database Sample Schemas*

See Also

https://www.oracle.com/database/technologies/appdev/plsql.html

Conventions

This document uses these text conventions:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
`monospace`	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.
{A|B|C}	Choose either A, B, or C.

Also:

- `*_view` means all static data dictionary views whose names end with `view`. For example, `*_ERRORS` means `ALL_ERRORS`, `DBA_ERRORS`, and `USER_ERRORS`. For more information about any static data dictionary view, or about static dictionary views in general, see *Oracle Database Reference*.
- Table names not qualified with schema names are in the sample schema `HR`. For information about the sample schemas, see *Oracle Database Sample Schemas*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax Descriptions

Syntax descriptions are provided in this book for various SQL, PL/SQL, or other command-line constructs in graphic form or Backus Naur Form (BNF). See *Oracle Database SQL Language Reference* for information about how to interpret these descriptions.

Copyright © 1996, 2025, Oracle and/or its affiliates.

1

Changes in This Release for Oracle Database PL/SQL Language Reference

New Features in Release 26ai for Oracle AI Database PL/SQL Language Reference

For Oracle AI Database 26ai, PL/SQL Language Reference documents these new features and enhancements.

> **See Also**
>
> *Oracle AI Database New Features* for the descriptions of all of the features that are new in Oracle AI Database Release 26ai

SQL BOOLEAN Data Type

Although `BOOLEAN` support has already been available with PL/SQL prior to this release, the `BOOLEAN` data type is now supported by SQL as well. This expansion of support provides improved compatibility between PL/SQL and SQL.

PL/SQL stored functions with `BOOLEAN` parameter types are now invokable directly from SQL. While PL/SQL functions with `BOOLEAN` arguments were already callable from SQL (with arguments of `BOOLEAN` type binds), `BOOLEAN` expressions and `BOOLEAN` literals are now supported as well. Additionally, PL/SQL stored procedures and anonymous PL/SQL blocks with host binds that expect values of the `BOOLEAN` type are invokable from C via OCI and other interfaces such as dynamic SQL and `DBMS_SQL`. It is also possible to call a C trusted or safe callout with formal parameters of `BOOLEAN` type.

`BOOLEAN` defines in the `INTO` and `BULK COLLECT INTO` clauses of a `SELECT` statement inside a PL/SQL block are supported.

Implicit conversions between `BOOLEAN` and number and character types are supported. It is possible to assign number and character variables and expressions to a `BOOLEAN` variable. The function `to_boolean` has also been added to convert from number and character types to the `BOOLEAN` data type. The functions `to_number`, `to_char`, and `to_nchar` now have `BOOLEAN` overloads to convert `BOOLEAN` values to number or character types. You can use the `CAST` operator to cast an expression to the `BOOLEAN` type as well.

To enable the support of implicit conversion, the initialization parameter `PLSQL_IMPLICIT_CONVERSION_BOOL` must be set to `TRUE`. Explicit conversions such as `CAST` and `to_char` do not depend on the parameter, so will work regardless of whether `PLSQL_IMPLICIT_CONVERSION_BOOL` is set to `TRUE` or `FALSE`. For more information about using `PLSQL_IMPLICIT_CONVERSION_BOOL`, see *Oracle AI Database Reference*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

All DML operations from PL/SQL take `BOOLEAN` variables in both `IN` and `OUT` binds, including array `IN` binds and array `OUT` binds. DML triggers support `BOOLEAN` binds (both `IN` and `OUT` binds) and `BOOLEAN` column references in the `WHEN` clause.

Pipelined table functions and polymorphic table functions (PTF) support returning columns of `BOOLEAN` data type.

It is possible to invoke Java and JavaScript stored procedures with parameters of `BOOLEAN` type from PL/SQL using call specifications with parameters of `BOOLEAN` type. PL/SQL procedures and anonymous blocks are also invokable from Java using JDBC in the server or client-server environment. Variables of `BOOLEAN` type passed using OCI, dynamic SQL, or `DBMS_SQL` can be passed directly as `BOOLEAN`.

Note

`BOOL` can be used as an abbreviation of `BOOLEAN`.

See Also

- *Oracle Database SQL Language Reference* for more information about the SQL `BOOLEAN` data type
- *Oracle Database SQL Language Reference* for more information about data conversion rules

Example 1-1 Calling a PL/SQL Function with BOOLEAN Argument from SQL

```
CREATE OR REPLACE FUNCTION useBool(p1 BOOLEAN) RETURN NUMBER AS
BEGIN
    IF p1 THEN RETURN 100;
    ELSE
        RETURN 200;
    END IF;
END;
/

SET SERVEROUTPUT ON;
DECLARE
    v1 NUMBER;
    v2 BOOLEAN := TRUE;
BEGIN
    SELECT useBool(v2) INTO v1 FROM dual; --boolean argument function called
from SELECT
    DBMS_OUTPUT.PUT_LINE(v1);
END;
/
```

Result:

```
100
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

SQL VECTOR Data Type

With Oracle Database Release 26ai, PL/SQL supports the `VECTOR` data type along with vector operations.

The `VECTOR` data type is introduced to support Artificial Intelligence workloads with Oracle AI Vector Search. Along with the new data type, vector operations including distance functions are provided to manage vectors in the database. In PL/SQL, the `VECTOR` data type is supported as its own distinct scalar family type and can be used in the same way as any other data type in PL/SQL.

For more information about vectors in PL/SQL, see VECTOR Data Type.

For information about Oracle AI Vector Search and general support for vectors in Oracle Database, see *Oracle AI Database AI Vector Search User's Guide*.

IF [NOT] EXISTS Syntax Support

The clauses `IF NOT EXISTS` and `IF EXISTS` are supported by `CREATE`, `ALTER`, and `DROP` DDL statements. They are used to suppress potential errors otherwise raised by the existence or non-existence of a given object, allowing you to write idempotent DDL scripts.

The `IF NOT EXISTS` clause is supported by the `CREATE` DDL statement to prevent errors from being thrown if an object with the given name already exists. If the object does already exist, the command is ignored and the original object remains unchanged.

On the flip side, the `IF EXISTS` clause suppresses errors when used with `ALTER` and `DROP` DDL statements. In the case that no object by the given name exists, the command is ignored and no object is affected by `ALTER` or `DROP`.

The use or exclusion of the clause provides you more control depending on whether you need to know if an object exists before executing a DDL statement. With this flexibility, you can determine whether you would rather have the statement ignored or have an error raised in the event the object exists (or doesn't exist).

> **Note**
>
> `IF NOT EXISTS` cannot be used in combination with `OR REPLACE` in commands using the `CREATE` DDL statement.

> **See Also**
>
> - SQL Statements for Stored PL/SQL Units for information about the semantics used to implement `IF [NOT] EXISTS` with different object types
> - *Oracle AI Database Development Guide* for more information about using the `IF [NOT] EXISTS` clause

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 1-2 CREATE PROCEDURE with IF NOT EXISTS

Executing this statement one time results in the creation of procedure `hello`, assuming a procedure by the same name does not already exist in your schema.

```
CREATE PROCEDURE IF NOT EXISTS hello AS
BEGIN
  DBMS_OUTPUT.PUT_LINE('Hello there');
END;
/
```

Executing the statement additional times, even with an altered procedure body, results in no error. The original body remains unchanged.

```
CREATE PROCEDURE IF NOT EXISTS hello AS
BEGIN
  DBMS_OUTPUT.PUT_LINE('Second hello');
END;
/
```

> **Note**
>
> The same output message will be displayed, in this case `Procedure created`, regardless of whether the command is ignored or executed. This ensures that you can write DDL scripts that are idempotent. The same holds true for `ALTER`, `CREATE`, and `DROP` statements.

The procedure text is the same before and after the second statement is executed.

```
SELECT TEXT FROM USER_SOURCE WHERE NAME='HELLO';

TEXT
----------------------------------------
procedure            hello
AS BEGIN
DBMS_OUTPUT.PUT_LINE('Hello there');
END;
```

Extended CASE Controls

The simple `CASE` statement is extended in PL/SQL to support the use of dangling predicates and choice lists, allowing for simplified and less redundant code.

Dangling predicates are ordinary expressions with their left operands missing that can be used as a `selector_value` either instead of or in combination with any number of literals or expressions. With dangling predicates, more complicated comparisons can be made without requiring a searched `CASE` statement.

> **Note**
>
> Currently, the dangling predicates `IS JSON` and `IS OF` are not supported.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Comma separated lists of choices are now supported in the `WHEN` clause(s) of a simple `CASE` statement. They can help streamline code by allowing for the consolidation of multiple `selector_value` options that correspond to the same result.

See Also

- Simple CASE Expression for more information about using the extended case controls and for an example that uses a choice list
- Simple CASE Statement for more information about using the extended `CASE` controls and for an example that uses dangling predicates
- CASE Statement for information on the syntax and semantics of simple `CASE` statements, including the extended `CASE` controls

JSON Constructor and JSON_VALUE Support of PL/SQL Aggregate Types

The JSON constructor can now accept a PL/SQL aggregate type and return a JSON object or array populated with the aggregate type data. Conversely, the built-in function `json_value` now supports PL/SQL aggregate types in the `RETURNING` clause, mapping from JSON to the specified aggregate type.

All PL/SQL record field and collection data element type constraints are honored by `json_value`, including character max length, integer range checks, and not null constraints.

SQL objects and PL/SQL record type instances, including implicit records created by the `%ROWTYPE` attribute, are allowed as valid input to the JSON constructor. Expanded support for user defined types as input streamlines data interchange between PL/SQL applications and languages that support JSON.

See Also

- PL/SQL and JSON Type Conversions for more information about using `json_value` and the JSON constructor with PL/SQL aggregate types
- *Oracle AI Database JSON Developer's Guide* for details about the JSON constructor
- *Oracle AI Database JSON Developer's Guide* for information about using `json_value` to instantiate a user-defined object-type or collection-type instance

SQL Transpiler

The SQL Transpiler automatically and wherever possible converts (transpiles) PL/SQL functions within SQL into SQL expressions, without user intervention.

The conversion operation is transparent to users and can improve performance by reducing overhead accrued from switching between the SQL and PL/SQL runtime.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- SQL_MACRO Clause for information about how standard PL/SQL functions can be used as an alternative to `SCALAR` macros due to the SQL Transpiler
- *Oracle AI Database SQL Tuning Guide* for details about the SQL Transpiler

Oracle AI Database 23ai, Release Update 23.7

For Oracle AI Database 26ai, Release Update 23.7, PL/SQL Language Reference documents these new features and enhancements.

Jaccard Distance Metric

With Oracle Database Release 23ai, Release Update 23.7, PL/SQL supports the Jaccard distance metric, used with vector similarity search.

The Jaccard similarity is used to determine the share of significant (non-zero) attributes common between two asymmetric `BINARY` vectors. The distance metric is applicable only to `BINARY` vectors.

For more information about using vectors in PL/SQL, see VECTOR Data Type.

For more information about the Jaccard similarity, see *Oracle AI Database AI Vector Search User's Guide*.

BINARY Vector Support

With Oracle Database Release 23ai, Release Update 23.7, PL/SQL supports the `BINARY` vector format.

The `BINARY` format is now supported by the `VECTOR` data type in PL/SQL.

For more information about vectors in PL/SQL, see VECTOR Data Type.

For information about `BINARY` vectors, see *Oracle AI Database AI Vector Search User's Guide*.

VECTOR Dimension-wise Arithmetic Support

With Oracle Database Release 23ai, Release Update 23.7, PL/SQL supports the `VECTOR` data type in arithmetic operations.

Dimension-wise addition, subtraction, and multiplication can be performed on variables and columns of the `VECTOR` data type.

For more information about vector arithmetic in PL/SQL, see VECTOR Operations Supported by PL/SQL.

For information about `VECTOR` arithmetic and aggregation, see *Oracle AI Database AI Vector Search User's Guide*.

Oracle AI Database 26ai, Release Update 23.8

For Oracle AI Database 26ai, Release Update 23.8, PL/SQL Language Reference documents these new features and enhancements.

Copyright © 1996, 2025, Oracle and/or its affiliates.

SPARSE Vector Support

With Oracle Database Release 23ai, Release Update 23.8, PL/SQL natively supports the creation and declaration of `SPARSE` vectors.

Sparse vectors are vectors that typically have a large number of dimensions but only a few of those dimensions have non-zero values. In certain cases, using `SPARSE` vectors can be more space-efficient and can improve similarity search performance when compared with using `DENSE` vectors.

If you are using RAC instances, you must enable Patch 37535524 using Oracle RAC two-stage rolling updates to enable support for `SPARSE` in PL/SQL. For more information, see *Oracle Real Application Clusters Administration and Deployment Guide*.

For more information about `SPARSE` vectors in PL/SQL, see VECTOR Data Type.

For information about `SPARSE` vectors, see *Oracle AI Database AI Vector Search User's Guide*.

Oracle AI Database 26ai, Release Update 23.26.0

For Oracle AI Database 26ai, Release Update 23.26.0, PL/SQL Language Reference documents these new features and enhancements.

New RESETTABLE Clause

With Oracle AI Database Release 26ai, Release Update 23.26.0, PL/SQL supports the `RESETTABLE` clause.

The `RESETTABLE` clause lets you indicate that a package can discard its state during reinstantiation without issue. This allows you to avoid the error `ORA-4068: existing state of packages has been discarded` during patches when you know that the package state does not need to be retained.

For information about using the `RESETTABLE` clause, see RESETTABLE Clause.

Deprecated Features

The following features are deprecated, and may be desupported in a future release.

The command `ALTER TYPE ... INVALIDATE` is deprecated. Use the `CASCADE` clause instead.

The `REPLACE` clause of `ALTER TYPE` is deprecated. Use the *`alter_method_spec`* clause instead. Alternatively, you can recreate the type using the `CREATE OR REPLACE TYPE` statement.

For the syntax and semantics, see ALTER TYPE Statement
Starting with Oracle Database 12c release 1 (12.1), the compilation parameter PLSQL_DEBUG is deprecated.

To compile PL/SQL units for debugging, specify PLSQL_OPTIMIZE_LEVEL=1.

For information about compilation parameters, see PL/SQL Units and Compilation Parameters.

Desupported Features

No features in PL/SQL Language Reference have been desupported.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database Upgrade Guide* for more information about desupported features in this release of Oracle Database

Copyright © 1996, 2025, Oracle and/or its affiliates.

2

Overview of PL/SQL

PL/SQL, the Oracle procedural extension of SQL, is a portable, high-performance transaction-processing language. This overview explains its advantages and briefly describes its main features and its architecture.

Topics

- Advantages of PL/SQL
- Main Features of PL/SQL
- Architecture of PL/SQL
- Protecting Sensitive Information in PL/SQL

Advantages of PL/SQL

PL/SQL offers several advantages over other programming languages.

PL/SQL has these advantages:

- Tight Integration with SQL
- High Performance
- High Productivity
- Portability
- Scalability
- Manageability
- Support for Object-Oriented Programming

Tight Integration with SQL

PL/SQL is tightly integrated with SQL, the most widely used database manipulation language.

For example:

- PL/SQL lets you use all SQL data manipulation, cursor control, and transaction control statements, and all SQL functions, operators, and pseudocolumns.
- PL/SQL fully supports SQL data types.

  You need not convert between PL/SQL and SQL data types. For example, if your PL/SQL program retrieves a value from a column of the SQL type `VARCHAR2`, it can store that value in a PL/SQL variable of the type `VARCHAR2`.

  You can give a PL/SQL data item the data type of a column or row of a database table without explicitly specifying that data type (see "Using the %TYPE Attribute" and "Using the %ROWTYPE Attribute").
- PL/SQL lets you run a SQL query and process the rows of the result set one at a time (see "Processing a Query Result Set One Row at a Time").

Copyright © 1996, 2025, Oracle and/or its affiliates.

- PL/SQL functions can be declared and defined in the `WITH` clauses of SQL `SELECT` statements (see *Oracle Database SQL Language Reference*).
- Where possible, PL/SQL functions called from a SQL statement are automatically converted to a semantically equivalent SQL expression by the Automatic SQL Transpiler (see "SQL_MACRO Clause" and *Oracle AI Database SQL Tuning Guide*).

PL/SQL supports both static and dynamic SQL. **Static SQL** is SQL whose full text is known at compile time. **Dynamic SQL** is SQL whose full text is not known until run time. Dynamic SQL lets you make your applications more flexible and versatile. For more information, see PL/SQL Static SQL and PL/SQL Dynamic SQL.

High Performance

PL/SQL lets you send a block of statements to the database, significantly reducing traffic between the application and the database.

Bind Variables

When you embed a SQL `INSERT`, `UPDATE`, `DELETE`, `MERGE`, or `SELECT` statement directly in your PL/SQL code, the PL/SQL compiler turns the variables in the `WHERE` and `VALUES` clauses into bind variables (for details, see "Resolution of Names in Static SQL Statements"). Oracle Database can reuse these SQL statements each time the same code runs, which improves performance.

PL/SQL does not create bind variables automatically when you use dynamic SQL, but you can use them with dynamic SQL by specifying them explicitly (for details, see "EXECUTE IMMEDIATE Statement").

Subprograms

PL/SQL subprograms are stored in executable form, which can be invoked repeatedly. Because stored subprograms run in the database server, a single invocation over the network can start a large job. This division of work reduces network traffic and improves response times. Stored subprograms are cached and shared among users, which lowers memory requirements and invocation overhead. For more information about subprograms, see "Subprograms".

Optimizer

The PL/SQL compiler has an optimizer that can rearrange code for better performance. For more information about the optimizer, see "PL/SQL Optimizer".

High Productivity

PL/SQL has many features that save designing and debugging time, and it is the same in all environments.

PL/SQL lets you write compact code for manipulating data. Just as a scripting language like PERL can read, transform, and write data in files, PL/SQL can query, transform, and update data in a database.

If you learn to use PL/SQL with one Oracle tool, you can transfer your knowledge to other Oracle tools. For an overview of PL/SQL features, see "Main Features of PL/SQL".

Portability

PL/SQL is a portable and standard language for Oracle development.

Copyright © 1996, 2025, Oracle and/or its affiliates.

You can run PL/SQL applications on any operating system and platform where Oracle Database runs.

Scalability

PL/SQL stored subprograms increase scalability by centralizing application processing on the database server.

The shared memory facilities of the shared server let Oracle Database support thousands of concurrent users on a single node. For more information about subprograms, see "Subprograms"

For further scalability, you can use Oracle Connection Manager to multiplex network connections. For information about Oracle Connection Manager, see "Oracle Database Net Services Reference"

Manageability

PL/SQL stored subprograms increase manageability because you can maintain only one copy of a subprogram, on the database server, rather than one copy on each client system.

Any number of applications can use the subprograms, and you can change the subprograms without affecting the applications that invoke them. For more information about subprograms, see "Subprograms".

Support for Object-Oriented Programming

PL/SQL allows defining object types that can be used in object-oriented designs.

PL/SQL supports object-oriented programming with "Abstract Data Types".

Main Features of PL/SQL

PL/SQL combines the data-manipulating power of SQL with the processing power of procedural languages.

When you can solve a problem with SQL, you can issue SQL statements from your PL/SQL program, without learning new APIs.

Like other procedural programming languages, PL/SQL lets you declare constants and variables, control program flow, define subprograms, and trap runtime errors.

You can break complex problems into easily understandable subprograms, which you can reuse in multiple applications.

Topics

- Error Handling
- Blocks
- Variables and Constants
- Subprograms
- Packages
- Triggers
- Input and Output

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Data Abstraction
- Control Statements
- Conditional Compilation
- Processing a Query Result Set One Row at a Time

Error Handling

PL/SQL makes it easy to detect and handle errors.

When an error occurs, PL/SQL raises an exception. Normal execution stops and control transfers to the exception-handling part of the PL/SQL block. You do not have to check every operation to ensure that it succeeded, as in a C program.

For more information, see PL/SQL Error Handling.

Blocks

The basic unit of a PL/SQL source program is the **block**, which groups related declarations and statements.

A PL/SQL block is defined by the keywords `DECLARE`, `BEGIN`, `EXCEPTION`, and `END`. These keywords divide the block into a declarative part, an executable part, and an exception-handling part. Only the executable part is required. A block can have a label.

Declarations are local to the block and cease to exist when the block completes execution, helping to avoid cluttered namespaces for variables and subprograms.

Blocks can be nested: Because a block is an executable statement, it can appear in another block wherever an executable statement is allowed.

You can submit a block to an interactive tool (such as SQL*Plus or Enterprise Manager) or embed it in an Oracle Precompiler or OCI program. The interactive tool or program runs the block one time. The block is not stored in the database, and for that reason, it is called an **anonymous block** (even if it has a label).

An anonymous block is compiled each time it is loaded into memory, and its compilation has three stages:

1. Syntax checking: PL/SQL syntax is checked, and a parse tree is generated.
2. Semantic checking: Type checking and further processing on the parse tree.
3. Code generation

> **Note**
>
> An anonymous block is a SQL statement.

For syntax details, see "Block".

Example 2-1 PL/SQL Block Structure

This example shows the basic structure of a PL/SQL block.

```
<< label >> (optional)
DECLARE    -- Declarative part (optional)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- Declarations of local types, variables, & subprograms

BEGIN      -- Executable part (required)
  -- Statements (which can use items declared in declarative part)

[EXCEPTION -- Exception-handling part (optional)
  -- Exception handlers for exceptions (errors) raised in executable part]
END;
```

Variables and Constants

PL/SQL lets you declare variables and constants, and then use them wherever you can use an expression.

As the program runs, the values of variables can change, but the values of constants cannot.

For more information, see "Declarations" and "Assigning Values to Variables".

Subprograms

A PL/SQL **subprogram** is a named PL/SQL block that can be invoked repeatedly.

If the subprogram has parameters, their values can differ for each invocation. PL/SQL has two types of subprograms, procedures and functions. A function returns a result.

For more information about PL/SQL subprograms, see PL/SQL Subprograms.

PL/SQL also lets you invoke external programs written in other languages.

For more information, see "External Subprograms".

Packages

A **package** is a schema object that groups logically related PL/SQL types, variables, constants, subprograms, cursors, and exceptions.

A package is compiled and stored in the database, where many applications can share its contents. You can think of a package as an application.

You can write your own packages—for details, see PL/SQL Packages. You can also use the many product-specific packages that Oracle Database supplies. For information about these, see *Oracle Database PL/SQL Packages and Types Reference*.

Triggers

A **trigger** is a named PL/SQL unit that is stored in the database and run in response to an event that occurs in the database.

You can specify the event, whether the trigger fires before or after the event, and whether the trigger runs for each event or for each row affected by the event. For example, you can create a trigger that runs every time an `INSERT` statement affects the `EMPLOYEES` table.

For more information about triggers, see PL/SQL Triggers.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Input and Output

Most PL/SQL input and output (I/O) is done with SQL statements that store data in database tables or query those tables. All other PL/SQL I/O is done with PL/SQL packages that Oracle Database supplies.

Table 2-1 PL/SQL I/O-Processing Packages

Package	Description	More Information
`DBMS_OUTPUT`	Lets PL/SQL blocks, subprograms, packages, and triggers display output. Especially useful for displaying PL/SQL debugging information.	*Oracle Database PL/SQL Packages and Types Reference*
`HTF`	Has hypertext functions that generate HTML tags (for example, the `HTF.ANCHOR` function generates the HTML anchor tag <A>).	*Oracle Database PL/SQL Packages and Types Reference*
`HTP`	Has hypertext procedures that generate HTML tags.	*Oracle Database PL/SQL Packages and Types Reference*
`DBMS_PIPE`	Lets two or more sessions in the same instance communicate.	*Oracle Database PL/SQL Packages and Types Reference*
`UTL_FILE`	Lets PL/SQL programs read and write operating system files.	*Oracle Database PL/SQL Packages and Types Reference*
`UTL_HTTP`	Lets PL/SQL programs make Hypertext Transfer Protocol (HTTP) callouts, and access data on the Internet over HTTP.	*Oracle Database PL/SQL Packages and Types Reference*
`UTL_SMTP`	Sends electronic mails (emails) over Simple Mail Transfer Protocol (SMTP) as specified by RFC821.	*Oracle Database PL/SQL Packages and Types Reference*

To display output passed to `DBMS_OUTPUT`, you need another program, such as SQL*Plus. To see `DBMS_OUTPUT` output with SQL*Plus, you must first issue the SQL*Plus command `SET SERVEROUTPUT ON`.

Some subprograms in the packages in Table 2-1 can both accept input and display output, but they cannot accept data directly from the keyboard. To accept data directly from the keyboard, use the SQL*Plus commands `PROMPT` and `ACCEPT`.

See Also

- *SQL*Plus User's Guide and Reference* for information about the SQL*Plus command `SET SERVEROUTPUT ON`
- *SQL*Plus User's Guide and Reference* for information about the SQL*Plus command `PROMPT`
- *SQL*Plus User's Guide and Reference* for information about the SQL*Plus command `ACCEPT`
- *Oracle Database SQL Language Reference* for information about SQL statements

Copyright © 1996, 2025, Oracle and/or its affiliates.

Data Abstraction

Data abstraction lets you work with the essential properties of data without being too involved with details.

You can design a data structure first, and then design algorithms that manipulate it.

Topics

- Cursors
- Composite Variables
- Using the %ROWTYPE Attribute
- Using the %TYPE Attribute
- Abstract Data Types

Cursors

A **cursor** is a pointer to a private SQL area that stores information about processing a specific SQL statement or PL/SQL `SELECT INTO` statement.

You can use the cursor to retrieve the rows of the result set one at a time. You can use cursor attributes to get information about the state of the cursor—for example, how many rows the statement has affected so far.

For more information about cursors, see "Cursors Overview".

Composite Variables

A **composite variable** has internal components, which you can access individually.

You can pass entire composite variables to subprograms as parameters. PL/SQL has two kinds of composite variables, collections and records.

In a **collection**, the internal components are always of the same data type, and are called **elements**. You access each element by its unique index. Lists and arrays are classic examples of collections.

In a **record**, the internal components can be of different data types, and are called **fields**. You access each field by its name. A record variable can hold a table row, or some columns from a table row.

For more information about composite variables, see PL/SQL Collections and Records.

Using the %ROWTYPE Attribute

The `%ROWTYPE` attribute lets you declare a record that represents either a full or partial row of a database table or view.

For every column of the full or partial row, the record has a field with the same name and data type. If the structure of the row changes, then the structure of the record changes accordingly.

For more information about `%ROWTYPE` syntax and semantics, see "%ROWTYPE Attribute". For more details about its usage, see "Declaring Items using the %ROWTYPE Attribute".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Using the %TYPE Attribute

The %TYPE attribute lets you declare a data item of the same data type as a previously declared variable or column (without knowing what that type is).

If the declaration of the referenced item changes, then the declaration of the referencing item changes accordingly. The %TYPE attribute is particularly useful when declaring variables to hold database values. For more information about %TYPE syntax and semantics, see "%TYPE Attribute". For more details about its usage, see "Declaring Items using the %TYPE Attribute".

Abstract Data Types

An **Abstract Data Type (ADT)** consists of a data structure and subprograms that manipulate the data.

The variables that form the data structure are called **attributes**. The subprograms that manipulate the attributes are called **methods**.

ADTs are stored in the database. Instances of ADTs can be stored in tables and used as PL/SQL variables.

ADTs let you reduce complexity by separating a large system into logical components, which you can reuse.

In the static data dictionary view *_OBJECTS, the OBJECT_TYPE of an ADT is TYPE. In the static data dictionary view *_TYPES, the TYPECODE of an ADT is OBJECT.

For more information about ADTs, see "CREATE TYPE Statement".

> **Note**
>
> ADTs are also called **user-defined types** and **object types**.

> **See Also**
>
> *Oracle Database Object-Relational Developer's Guide* for information about ADTs (which it calls *object types*)

Control Statements

Control statements are the most important PL/SQL extension to SQL.

PL/SQL has three categories of control statements:

- **Conditional selection statements**, which let you run different statements for different data values.

  For more information, see "Conditional Selection Statements".

- **Loop statements**, which let you repeat the same statements with a series of different data values.

  For more information, see "LOOP Statements".

Copyright © 1996, 2025, Oracle and/or its affiliates.

- **Sequential control statements**, which allow you to go to a specified, labeled statement, or to do nothing.

  For more information, see "Sequential Control Statements".

Conditional Compilation

Conditional compilation lets you customize the functionality in a PL/SQL application without removing source text.

For example, you can:

- Use new features with the latest database release, and disable them when running the application in an older database release.
- Activate debugging or tracing statements in the development environment, and hide them when running the application at a production site.

For more information, see "Conditional Compilation".

Processing a Query Result Set One Row at a Time

PL/SQL lets you issue a SQL query and process the rows of the result set one at a time.

You can use a basic loop, or you can control the process precisely by using individual statements to run the query, retrieve the results, and finish processing.

Example 2-2 Processing Query Result Rows One at a Time

This example uses a basic loop.

```
BEGIN
  FOR someone IN (
    SELECT * FROM employees
    WHERE employee_id < 120
    ORDER BY employee_id
  )
  LOOP
    DBMS_OUTPUT.PUT_LINE('First name = ' || someone.first_name ||
                         ', Last name = ' || someone.last_name);
  END LOOP;
END;
/
```

Result:

```
First name = Steven, Last name = King
First name = Neena, Last name = Yang
First name = Lex, Last name = Garcia
First name = Alexander, Last name = James
First name = Bruce, Last name = Miller
First name = David, Last name = Williams
First name = Valli, Last name = Jackson
First name = Diana, Last name = Nguyen
First name = Nancy, Last name = Gruenberg
First name = Daniel, Last name = Faviet
First name = John, Last name = Chen
First name = Ismael, Last name = Sciarra
First name = Jose Manuel, Last name = Urman
First name = Luis, Last name = Popp
First name = Den, Last name = Li
First name = Alexander, Last name = Khoo
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
First name = Shelli, Last name = Baida
First name = Sigal, Last name = Tobias
First name = Guy, Last name = Himuro
First name = Karen, Last name = Colmenares
```

Architecture of PL/SQL

Basic understanding of the PL/SQL architecture is beneficial to PL/SQL programmers.

Topics

- PL/SQL Engine
- PL/SQL Units and Compilation Parameters

PL/SQL Engine

The PL/SQL compilation and runtime system is an engine that compiles and runs PL/SQL units.

The engine can be installed in the database or in an application development tool, such as Oracle Forms.

In either environment, the PL/SQL engine accepts as input any valid PL/SQL unit. The engine runs procedural statements, but sends SQL statements to the SQL engine in the database, as shown in Figure 2-1.

Figure 2-1 PL/SQL Engine

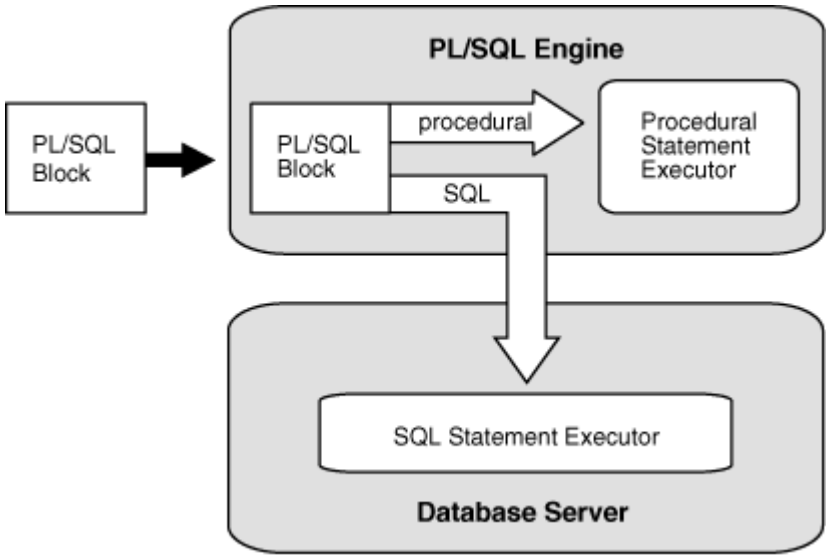

Typically, the database processes PL/SQL units.

When an application development tool processes PL/SQL units, it passes them to its local PL/SQL engine. If a PL/SQL unit contains no SQL statements, the local engine processes the entire PL/SQL unit. This is useful if the application development tool can benefit from conditional and iterative control.

Copyright © 1996, 2025, Oracle and/or its affiliates.

For example, Oracle Forms applications frequently use SQL statements to test the values of field entries and do simple computations. By using PL/SQL instead of SQL, these applications can avoid calls to the database.

PL/SQL Units and Compilation Parameters

PL/SQL units are affected by PL/SQL compilation parameters (a category of database initialization parameters). Different PL/SQL units—for example, a package specification and its body—can have different compilation parameter settings.

A PL/SQL unit is one of these:

- PL/SQL anonymous block
- `FUNCTION`
- `LIBRARY`
- `PACKAGE`
- `PACKAGE BODY`
- `PROCEDURE`
- `TRIGGER`
- `TYPE`
- `TYPE BODY`

Table 2-2 summarizes the PL/SQL compilation parameters. To display the values of these parameters for specified or all PL/SQL units, query the static data dictionary view `ALL_PLSQL_OBJECT_SETTINGS`. For information about this view, see *Oracle Database Reference*.

Table 2-2 PL/SQL Compilation Parameters

Parameter	Description
`PLSCOPE_SETTINGS`	Controls the compile-time collection, cross-reference, and storage of PL/SQL source text identifier data. Used by the PL/Scope tool (see *Oracle Database Development Guide*). For more information about `PLSCOPE_SETTINGS`, see *Oracle Database Reference*.
`PLSQL_CCFLAGS`	Lets you control conditional compilation of each PL/SQL unit independently. For more information about `PLSQL_CCFLAGS`, see "How Conditional Compilation Works" and *Oracle Database Reference*.
`PLSQL_CODE_TYPE`	Specifies the compilation mode for PL/SQL units—`INTERPRETED` (the default) or `NATIVE`. For information about which mode to use, see "Determining Whether to Use PL/SQL Native Compilation". If the optimization level (set by `PLSQL_OPTIMIZE_LEVEL`) is less than 2: • The compiler generates interpreted code, regardless of `PLSQL_CODE_TYPE`. • If you specify `NATIVE`, the compiler warns you that `NATIVE` was ignored. For more information about `PLSQL_CODE_TYPE`, see *Oracle Database Reference*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 2-2 (Cont.) PL/SQL Compilation Parameters

Parameter	Description
PLSQL_OPTIMIZE_LEVEL	Specifies the optimization level at which to compile PL/SQL units (the higher the level, the more optimizations the compiler tries to make). PLSQL_OPTIMIZE_LEVEL=1 instructs the PL/SQL compiler to generate and store code for use by the PL/SQL debugger. For more information about PLSQL_OPTIMIZE_LEVEL, see "PL/SQL Optimizer" and *Oracle Database Reference*.
PLSQL_WARNINGS	Enables or disables the reporting of warning messages by the PL/SQL compiler, and specifies which warning messages to show as errors. For more information about PLSQL_WARNINGS, see "Compile-Time Warnings" and *Oracle Database Reference*.
NLS_LENGTH_SEMANTICS	Lets you create CHAR and VARCHAR2 columns using either byte-length or character-length semantics. For more information about byte and character length semantics, see "CHAR and VARCHAR2 Variables". For more information about NLS_LENGTH_SEMANTICS, see *Oracle Database Reference*.
PERMIT_92_WRAP_FORMAT	Specifies whether the 12.1 PL/SQL compiler can use wrapped packages that were compiled with the 9.2 PL/SQL compiler. The default value is TRUE. For more information about wrapped packages, see PL/SQL Source Text Wrapping. For more information about PERMIT_92_WRAP_FORMAT, see *Oracle Database Reference*.

> **Note**
>
> The compilation parameter PLSQL_DEBUG, which specifies whether to compile PL/SQL units for debugging, is deprecated. To compile PL/SQL units for debugging, specify PLSQL_OPTIMIZE_LEVEL=1.

The compile-time values of the parameters in Table 2-2 are stored with the metadata of each stored PL/SQL unit, which means that you can reuse those values when you explicitly recompile the unit. (A **stored PL/SQL unit** is created with one of the "CREATE [OR REPLACE] Statements". An anonymous block is not a stored PL/SQL unit.)

To explicitly recompile a stored PL/SQL unit and reuse its parameter values, you must use an ALTER statement with both the COMPILE clause and the REUSE SETTINGS clause. All ALTER statements have this clause. For a list of ALTER statements, see "ALTER Statements".

Protecting Sensitive Information in PL/SQL

Data security should be a top priority during any application development. There are several ways you can mitigate the risk of vulnerabilities while using PL/SQL.

Be aware that the content of a PL/SQL block may be written in its entirety in such places as audit logs and trace files. Similarly, stored procedure code can be accessed through dictionary

Copyright © 1996, 2025, Oracle and/or its affiliates.

views, such as `USER_SOURCE`. For this reason, it is strongly recommended that you never include any sensitive information in a literal seen in PL/SQL code.

Bind variables can be used to help protect against SQL injection attacks, however, bind values can be visible in places such as trace files, audit, and `V$SQL` and related views. Access should be strictly managed to ensure that only those who require it have privileges to view this particularly sensitive information. For more information about using bind variables, see "Bind Variables".

Copyright © 1996, 2025, Oracle and/or its affiliates.

3

PL/SQL Language Fundamentals

The PL/SQL language fundamental components are explained.

- Character Sets
- Lexical Units
- Declarations
- References to Identifiers
- Scope and Visibility of Identifiers
- Assigning Values to Variables
- Expressions
- Error-Reporting Functions
- Conditional Compilation

Character Sets

Any character data to be processed by PL/SQL or stored in a database must be represented as a sequence of bytes. The byte representation of a single character is called a **character code**. A set of character codes is called a **character set**.

Every Oracle database supports a database character set and a national character set. PL/SQL also supports these character sets. This document explains how PL/SQL uses the database character set and national character set.

Topics

- Database Character Set
- National Character Set
- About Data-Bound Collation

> **See Also**
>
> *Oracle Database Globalization Support Guide* for general information about character sets

Database Character Set

PL/SQL uses the **database character set** to represent:

- Stored source text of PL/SQL units

  For information about PL/SQL units, see "PL/SQL Units and Compilation Parameters".
- Character values of data types `CHAR`, `VARCHAR2`, `CLOB`, and `LONG`

Copyright © 1996, 2025, Oracle and/or its affiliates.

For information about these data types, see "SQL Data Types".

The database character set can be either single-byte, mapping each supported character to one particular byte, or multibyte-varying-width, mapping each supported character to a sequence of one, two, three, or four bytes. The maximum number of bytes in a character code depends on the particular character set.

Every database character set includes these basic characters:

- **Latin letters:** *A* through *Z* and *a* through *z*
- **Decimal digits:** *0* through *9*
- **Punctuation characters** in Table 3-1
- **Whitespace characters:** *space*, *tab*, *new line*, and *carriage return*

PL/SQL source text that uses only the basic characters can be stored and compiled in any database. PL/SQL source text that uses nonbasic characters can be stored and compiled only in databases whose database character sets support those nonbasic characters.

Table 3-1 Punctuation Characters in Every Database Character Set

Symbol	Name
(	Left parenthesis
)	Right parenthesis
<	Left angle bracket
>	Right angle bracket
+	Plus sign
-	Hyphen *or* minus sign
*	Asterisk
/	Slash
=	Equal sign
,	Comma
;	Semicolon
:	Colon
.	Period
!	Exclamation point
?	Question mark
'	Apostrophe *or* single quotation mark
"	Quotation mark *or* double quotation mark
@	At sign
%	Percent sign
#	Number sign
$	Dollar sign
_	Underscore
|	Vertical bar

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> *Oracle Database Globalization Support Guide* for more information about the database character set

National Character Set

PL/SQL uses the **national character set** to represent character values of data types `NCHAR`, `NVARCHAR2` and `NCLOB`.

> **See Also**
>
> - "SQL Data Types" for information about these data types
> - *Oracle Database Globalization Support Guide* for more information about the national character set

About Data-Bound Collation

Collation (also called sort ordering) is a set of rules that determines if a character string equals, precedes, or follows another string when the two strings are compared and sorted.

Different collations correspond to rules of different spoken languages. Collation-sensitive operations are operations that compare text and need a collation to control the comparison rules. The equality operator and the built-in function `INSTR` are examples of collation-sensitive operations.

Starting with Oracle Database 12c release 2 (12.2) , a new architecture provides control of the collation to be applied to operations on character data. In the new architecture, collation becomes an attribute of character data, analogous to a data type. You can now declare collation for a column and this collation is automatically applied by all collation-sensitive SQL operations referencing the column. The data-bound collation feature uses syntax and semantics compatible with the ISO/IEC SQL standard.

The PL/SQL language has limited support for the data-bound collation architecture. All data processed in PL/SQL expressions is assumed to have the compatibility collation `USING_NLS_COMP`. This pseudo-collation instructs collation-sensitive operators to behave in the same way as in previous Oracle Database releases. That is, the values of the session parameters `NLS_COMP` and `NLS_SORT` determine the collation to use. However, all SQL statements embedded or constructed dynamically in PL/SQL fully support the new architecture.

A new property called default collation has been added to tables, views, materialized views, packages, stored procedures, stored functions, triggers, and types. The default collation of a unit determines the collation for data containers, such as columns, variables, parameters, literals, and return values, that do not have their own explicit collation declaration in that unit. The default collation for packages, stored procedures, stored functions, triggers, and types must be `USING_NLS_COMP`.

For syntax and semantics, see the DEFAULT COLLATION Clause.

Copyright © 1996, 2025, Oracle and/or its affiliates.

To facilitate the creation of PL/SQL units in a schema that has a schema default collation other than `USING_NLS_COMP`, the syntax and semantics for the following statements enable an explicit declaration of the object's default collation to be `USING_NLS_COMP`:

- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE PROCEDURE Statement
- CREATE TRIGGER Statement
- CREATE TYPE Statement

See Also

- *Oracle Database Globalization Support Guide* for more information about specifying data-bound collation for PL/SQL units
- *Oracle Database Globalization Support Guide* for more information about effective schema default collation

Lexical Units

The **lexical units** of PL/SQL are its smallest individual components—delimiters, identifiers, literals, pragmas, and comments.

Topics

- Delimiters
- Identifiers
- Literals
- Pragmas
- Comments
- Whitespace Characters Between Lexical Units

Delimiters

A **delimiter** is a character, or character combination, that has a special meaning in PL/SQL.

Do not embed any others characters (including whitespace characters) inside a delimiter.

Table 3-2 summarizes the PL/SQL delimiters.

Table 3-2 PL/SQL Delimiters

Delimiter	Meaning
+	Addition operator
:=	Assignment operator
=>	Association operator
%	Attribute indicator

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 3-2 (Cont.) PL/SQL Delimiters

Delimiter	Meaning
'	Character string delimiter
.	Component indicator
||	Concatenation operator
/	Division operator
**	Exponentiation operator
(	Expression or list delimiter (begin)
)	Expression or list delimiter (end)
:	Host variable indicator
,	Item separator
<<	Label delimiter (begin)
>>	Label delimiter (end)
/*	Multiline comment delimiter (begin)
*/	Multiline comment delimiter (end)
*	Multiplication operator
"	Quoted identifier delimiter
..	Range operator
=	Relational operator (equal)
<>	Relational operator (not equal)
!=	Relational operator (not equal)
~=	Relational operator (not equal)
^=	Relational operator (not equal)
<	Relational operator (less than)
>	Relational operator (greater than)
<=	Relational operator (less than or equal)
>=	Relational operator (greater than or equal)
@	Remote access indicator
--	Single-line comment indicator
;	Statement terminator
-	Subtraction or negation operator

Identifiers

Identifiers name PL/SQL elements, which include:

- Constants
- Cursors
- Exceptions
- Keywords

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Labels
- Packages
- Reserved words
- Subprograms
- Types
- Variables

Every character in an identifier, alphabetic or not, is significant. For example, the identifiers `lastname` and `last_name` are different.

You must separate adjacent identifiers by one or more whitespace characters or a punctuation character.

Except as explained in "Quoted User-Defined Identifiers", PL/SQL is case-insensitive for identifiers. For example, the identifiers `lastname`, `LastName`, and `LASTNAME` are the same.

Topics

- Reserved Words and Keywords
- Predefined Identifiers
- User-Defined Identifiers

Reserved Words and Keywords

Reserved words and **keywords** are identifiers that have special meaning in PL/SQL.

You cannot use reserved words as ordinary user-defined identifiers. You can use them as quoted user-defined identifiers, but it is not recommended. For more information, see "Quoted User-Defined Identifiers".

You can use keywords as ordinary user-defined identifiers, but it is not recommended.

For lists of PL/SQL reserved words and keywords, see Table D-1 and Table D-2, respectively.

Predefined Identifiers

Predefined identifiers are declared in the predefined package `STANDARD`.

An example of a predefined identifier is the exception `INVALID_NUMBER`.

For a list of predefined identifiers, connect to Oracle Database as a user who has the DBA role and use this query:

```
SELECT TYPE_NAME FROM ALL_TYPES WHERE PREDEFINED='YES';
```

You can use predefined identifiers as user-defined identifiers, but it is not recommended. Your local declaration overrides the global declaration (see "Scope and Visibility of Identifiers").

User-Defined Identifiers

A **user-defined identifier** is:

- Composed of characters from the database character set
- Either ordinary or quoted

Copyright © 1996, 2025, Oracle and/or its affiliates.

Tip

Make user-defined identifiers meaningful. For example, the meaning of `cost_per_thousand` is obvious, but the meaning of `cpt` is not.

Tip

Avoid using the same user-defined identifier for both a schema and a schema object. This decreases code readability and maintainability and can lead to coding mistakes. Note that local objects have name resolution precedence over schema qualification.

For more information about database object naming rules, see *Oracle AI Database SQL Language Reference*.

For more information about PL/SQL-specific name resolution rules, see "Differences Between PL/SQL and SQL Name Resolution Rules".

Ordinary User-Defined Identifiers

An ordinary user-defined identifier:

- Begins with a letter
- Can include letters, digits, and these symbols:
  - Dollar sign ($)
  - Number sign (#)
  - Underscore (_)
- Is not a reserved word (listed in Table D-1).

The database character set defines which characters are classified as letters and digits. If COMPATIBLE is set to a value of 12.2 or higher, the representation of the identifier in the database character set cannot exceed 128 bytes. If COMPATIBLE is set to a value of 12.1 or lower, the limit is 30 bytes.

Examples of acceptable ordinary user-defined identifiers:

```
X
t2
phone#
credit_limit
LastName
oracle$number
money$$$tree
SN##
try_again_
```

Examples of unacceptable ordinary user-defined identifiers:

```
mine&yours
debit-amount
on/off
user id
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Quoted User-Defined Identifiers

A quoted user-defined identifier is enclosed in double quotation marks.

Between the double quotation marks, any characters from the database character set are allowed except double quotation marks, new line characters, and null characters. For example, these identifiers are acceptable:

```
"X+Y"
"last name"
"on/off switch"
"employee(s)"
"*** header info ***"
```

If COMPATIBLE is set to a value of 12.2 or higher, the representation of the quoted identifier in the database character set cannot exceed 128 bytes (excluding the double quotation marks). If COMPATIBLE is set to a value of 12.1 or lower, the limit is 30 bytes.

A quoted user-defined identifier is case-sensitive, with one exception: If a quoted user-defined identifier, without its enclosing double quotation marks, is a valid *ordinary* user-defined identifier, then the double quotation marks are optional in references to the identifier, and if you omit them, then the identifier is case-insensitive.

It is not recommended, but you can use a reserved word as a quoted user-defined identifier. Because a reserved word is not a valid ordinary user-defined identifier, you must always enclose the identifier in double quotation marks, and it is always case-sensitive.

Example 3-1 Valid Case-Insensitive Reference to Quoted User-Defined Identifier

In this example, the quoted user-defined identifier `"HELLO"`, without its enclosing double quotation marks, is a valid ordinary user-defined identifier. Therefore, the reference `Hello` is valid.

```
DECLARE
  "HELLO" varchar2(10) := 'hello';
BEGIN
  DBMS_Output.Put_Line(Hello);
END;
/
```

Result:

```
hello
```

Example 3-2 Invalid Case-Insensitive Reference to Quoted User-Defined Identifier

In this example, the reference `"Hello"` is invalid, because the double quotation marks make the identifier case-sensitive.

```
DECLARE
  "HELLO" varchar2(10) := 'hello';
BEGIN
  DBMS_Output.Put_Line("Hello");
END;
/
```

Result:

```
  DBMS_Output.Put_Line("Hello");
                       *
ERROR at line 4:
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
ORA-06550: line 4, column 25:
PLS-00201: identifier 'Hello' must be declared
ORA-06550: line 4, column 3:
PL/SQL: Statement ignored
```

Example 3-3 Reserved Word as Quoted User-Defined Identifier

This example declares quoted user-defined identifiers "BEGIN", "Begin", and "begin". Although BEGIN, Begin, and begin represent the same reserved word, "BEGIN", "Begin", and "begin" represent different identifiers.

```
DECLARE
  "BEGIN" varchar2(15) := 'UPPERCASE';
  "Begin" varchar2(15) := 'Initial Capital';
  "begin" varchar2(15) := 'lowercase';
BEGIN
  DBMS_Output.Put_Line("BEGIN");
  DBMS_Output.Put_Line("Begin");
  DBMS_Output.Put_Line("begin");
END;
/
```

Result:

```
UPPERCASE
Initial Capital
lowercase

PL/SQL procedure successfully completed.
```

Example 3-4 Neglecting Double Quotation Marks

This example references a quoted user-defined identifier that is a reserved word, neglecting to enclose it in double quotation marks.

```
DECLARE
  "HELLO" varchar2(10) := 'hello';  -- HELLO is not a reserved word
  "BEGIN" varchar2(10) := 'begin';  -- BEGIN is a reserved word
BEGIN
  DBMS_Output.Put_Line(Hello);      -- Double quotation marks are optional
  DBMS_Output.Put_Line(BEGIN);      -- Double quotation marks are required
end;
/
```

Result:

```
  DBMS_Output.Put_Line(BEGIN);      -- Double quotation marks are required
                       *
ERROR at line 6:
ORA-06550: line 6, column 24:
PLS-00103: Encountered the symbol "BEGIN" when expecting one of the following:
( ) - + case mod new not null <an identifier>
<a double-quoted delimited-identifier> <a bind variable>
table continue avg count current exists max min prior sql
stddev sum variance execute multiset the both leading
trailing forall merge year month day hour minute second
timezone_hour timezone_minute timezone_region timezone_abbr
time timestamp interval date
<a string literal with character set specificat
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 3-5 Neglecting Case-Sensitivity

This example references a quoted user-defined identifier that is a reserved word, neglecting its case-sensitivity.

```
DECLARE
  "HELLO" varchar2(10) := 'hello';  -- HELLO is not a reserved word
  "BEGIN" varchar2(10) := 'begin';  -- BEGIN is a reserved word
BEGIN
  DBMS_Output.Put_Line(Hello);      -- Identifier is case-insensitive
  DBMS_Output.Put_Line("Begin");    -- Identifier is case-sensitive
END;
/
```

Result:

```
  DBMS_Output.Put_Line("Begin");    -- Identifier is case-sensitive
                       *
ERROR at line 6:
ORA-06550: line 6, column 25:
PLS-00201: identifier 'Begin' must be declared
ORA-06550: line 6, column 3:
PL/SQL: Statement ignored
```

Literals

A **literal** is a value that is neither represented by an identifier nor calculated from other values.

For example, `123` is an integer literal and `'abc'` is a character literal, but `1+2` is not a literal.

PL/SQL literals include all SQL literals (described in *Oracle Database SQL Language Reference*), including `BOOLEAN` literals. A `BOOLEAN` literal is the predefined logical value `TRUE`, `FALSE`, or `NULL`. `NULL` represents an unknown value.

> **Note**
>
> Like *Oracle Database SQL Language Reference*, this document uses the terms *character literal* and *string* interchangeably.

When using character literals in PL/SQL, remember:

- Character literals are case-sensitive.

  For example, `'Z'` and `'z'` are different.

- Whitespace characters are significant.

  For example, these literals are different:

  ```
  'abc'
  ' abc'
  'abc '
  ' abc '
  'a b c'
  ```

- PL/SQL has no line-continuation character that means "this string continues on the next source line." If you continue a string on the next source line, then the string includes a line-break character.

  For example, this PL/SQL code:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  DBMS_OUTPUT.PUT_LINE('This string breaks
here.');
END;
/
```

Prints this:

```
This string breaks
here.
```

If your string does not fit on a source line and you do not want it to include a line-break character, then construct the string with the concatenation operator (`||`).

For example, this PL/SQL code:

```
BEGIN
  DBMS_OUTPUT.PUT_LINE('This string ' ||
                       'contains no line-break character.');
END;
/
```

Prints this:

```
This string contains no line-break character.
```

For more information about the concatenation operator, see "Concatenation Operator".

- `'0'` through `'9'` are not equivalent to the integer literals 0 through 9.

  However, because PL/SQL converts them to integers, you can use them in arithmetic expressions.

- A character literal with zero characters has the value `NULL` and is called a **null string**.

  However, this `NULL` value is not the `BOOLEAN` value `NULL`.

- An **ordinary character literal** is composed of characters in the **database character set**.

  For information about the database character set, see *Oracle Database Globalization Support Guide*.

- A **national character literal** is composed of characters in the **national character set**.

  For information about the national character set, see *Oracle Database Globalization Support Guide*.

- You can use `Q` or `q` as part of the character literal syntax to indicate that an alternative quoting mechanism will be used. This mechanism allows a wide range of delimiters for a string as opposed to simply single quotation marks.

  For more information about the alternative quoting mechanism, see *Oracle AI Database SQL Language Reference*.

> **Live SQL**
>
> You can view and run examples of the `Q` mechanism at Alternative Quoting Mechanism ("Q") for String Literals

Pragmas

A **pragma** is an instruction to the compiler that it processes at compile time.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A pragma begins with the reserved word `PRAGMA` followed by the name of the pragma. Some pragmas have arguments. A pragma may appear before a declaration or a statement. Additional restrictions may apply for specific pragmas. The extent of a pragma's effect depends on the pragma. A pragma whose name or argument is not recognized by the compiler has no effect.

***pragma* ::=**

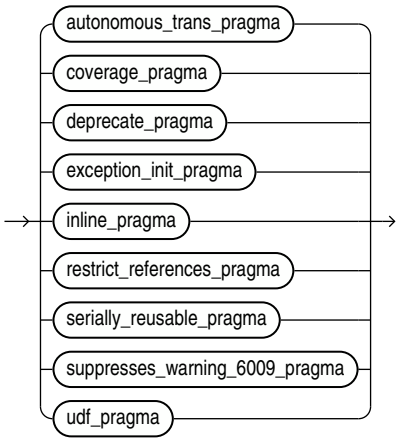

For information about pragmas syntax and semantics, see :

- "AUTONOMOUS_TRANSACTION Pragma"
- "COVERAGE Pragma"
- "DEPRECATE Pragma"
- "EXCEPTION_INIT Pragma"
- "INLINE Pragma"
- "RESTRICT_REFERENCES Pragma"
- "SERIALLY_REUSABLE Pragma"
- "SUPPRESSES_WARNING_6009 Pragma"
- "UDF Pragma"

Comments

The PL/SQL compiler ignores comments. Their purpose is to help other application developers understand your source text.

Typically, you use comments to describe the purpose and use of each code segment. You can also disable obsolete or unfinished pieces of code by turning them into comments.

Topics

- Single-Line Comments
- Multiline Comments

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> "Comment"

Single-Line Comments

A single-line comment begins with `--` and extends to the end of the line.

> **Caution**
>
> Do not put a single-line comment in a PL/SQL block to be processed dynamically by an Oracle Precompiler program. The Oracle Precompiler program ignores end-of-line characters, which means that a single-line comment ends when the block ends.

While testing or debugging a program, you can disable a line of code by making it a comment. For example:

```
-- DELETE FROM employees WHERE comm_pct IS NULL
```

Example 3-6 Single-Line Comments

This example has three single-line comments.

```
DECLARE
  howmany     NUMBER;
  num_tables  NUMBER;
BEGIN
  -- Begin processing
  SELECT COUNT(*) INTO howmany
  FROM USER_OBJECTS
  WHERE OBJECT_TYPE = 'TABLE'; -- Check number of tables
  num_tables := howmany;       -- Compute another value
END;
/
```

Multiline Comments

A multiline comment begins with `/*`, ends with `*/`, and can span multiple lines.

You can use multiline comment delimiters to "comment out" sections of code. When doing so, be careful not to cause nested multiline comments. One multiline comment cannot contain another multiline comment. However, a multiline comment can contain a single-line comment. For example, this causes a syntax error:

```
/*
  IF 2 + 2 = 4 THEN
    some_condition := TRUE;
  /* We expect this THEN to always be performed */
  END IF;
*/
```

This does not cause a syntax error:

```
/*
  IF 2 + 2 = 4 THEN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    some_condition := TRUE;
  -- We expect this THEN to always be performed
  END IF;
*/
```

Example 3-7 Multiline Comments

This example has two multiline comments. (The SQL function `TO_CHAR` returns the character equivalent of its argument. For more information about `TO_CHAR`, see *Oracle Database SQL Language Reference*.)

```
DECLARE
  some_condition  BOOLEAN;
  pi              NUMBER := 3.1415926;
  radius          NUMBER := 15;
  area            NUMBER;
BEGIN
  /* Perform some simple tests and assignments */

  IF 2 + 2 = 4 THEN
    some_condition := TRUE;
  /* We expect this THEN to always be performed */
  END IF;

  /* This line computes the area of a circle using pi,
  which is the ratio between the circumference and diameter.
  After the area is computed, the result is displayed. */

  area := pi * radius**2;
  DBMS_OUTPUT.PUT_LINE('The area is: ' || TO_CHAR(area));
END;
/
```

Result:

```
The area is: 706.858335
```

Whitespace Characters Between Lexical Units

You can put whitespace characters between lexical units, which often makes your source text easier to read.

Example 3-8 Whitespace Characters Improving Source Text Readability

```
DECLARE
  x    NUMBER := 10;
  y    NUMBER := 5;
  max  NUMBER;
BEGIN
  IF x>y THEN max:=x;ELSE max:=y;END IF;  -- correct but hard to read

  -- Easier to read:

  IF x > y THEN
    max:=x;
  ELSE
    max:=y;
  END IF;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Declarations

A declaration allocates storage space for a value of a specified data type, and names the storage location so that you can reference it.

You must declare objects before you can reference them. Declarations can appear in the declarative part of any block, subprogram, or package.

Topics

- Declaring Variables
- Declaring Constants
- Initial Values of Variables and Constants
- NOT NULL Constraint
- Declaring Items using the %TYPE Attribute

For information about declaring objects other than variables and constants, see the syntax of *declare_section* in "Block".

NOT NULL Constraint

You can impose the `NOT NULL` constraint on a scalar variable or constant (or scalar component of a composite variable or constant).

The `NOT NULL` constraint prevents assigning a null value to the item. The item can acquire this constraint either implicitly (from its data type) or explicitly.

A scalar variable declaration that specifies `NOT NULL`, either implicitly or explicitly, must assign an initial value to the variable (because the default initial value for a scalar variable is `NULL`).

PL/SQL treats any zero-length string as a `NULL` value. This includes values returned by character functions and `BOOLEAN` expressions.

To test for a `NULL` value, use the "IS [NOT] NULL Operator".

Examples

Example 3-9 Variable Declaration with NOT NULL Constraint

In this example, the variable `acct_id` acquires the `NOT NULL` constraint explicitly, and the variables `a`, `b`, and `c` acquire it from their data types.

```
DECLARE
  acct_id INTEGER(4) NOT NULL := 9999;
  a NATURALN                  := 9999;
  b POSITIVEN                 := 9999;
  c SIMPLE_INTEGER            := 9999;
BEGIN
  NULL;
END;
/
```

Example 3-10 Variables Initialized to NULL Values

In this example, all variables are initialized to `NULL`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  null_string  VARCHAR2(80) := TO_CHAR('');
  address      VARCHAR2(80);
  zip_code     VARCHAR2(80) := SUBSTR(address, 25, 0);
  name         VARCHAR2(80);
  valid        BOOLEAN      := (name != '');
BEGIN
  NULL;
END;
/
```

Declaring Variables

A variable declaration always specifies the name and data type of the variable.

For most data types, a variable declaration can also specify an initial value.

The variable name must be a valid user-defined identifier .

The data type can be any PL/SQL data type. The PL/SQL data types include the SQL data types. A data type is either scalar (without internal components) or composite (with internal components).

Example

Example 3-11 Scalar Variable Declarations

This example declares several variables with scalar data types.

```
DECLARE
  part_number       NUMBER(6);
  part_name         VARCHAR2(20);
  in_stock          BOOLEAN;
  part_price        NUMBER(6,2);
  part_description  VARCHAR2(50);
BEGIN
  NULL;
END;
/
```

Related Topics

- "User-Defined Identifiers"
- "Scalar Variable Declaration" for scalar variable declaration syntax
- PL/SQL Data Types for information about scalar data types
- PL/SQL Collections and Records, for information about composite data types and variables

Declaring Constants

A constant holds a value that does not change.

The information in "Declaring Variables" also applies to constant declarations, but a constant declaration has two more requirements: the keyword `CONSTANT` and the initial value of the constant. (The initial value of a constant is its permanent value.)

Example 3-12 Constant Declarations

This example declares three constants with scalar data types.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  credit_limit     CONSTANT REAL    := 5000.00;
  max_days_in_year CONSTANT INTEGER := 366;
  urban_legend     CONSTANT BOOLEAN := FALSE;
BEGIN
  NULL;
END;
/
```

Related Topic

- "Constant Declaration" for constant declaration syntax

Initial Values of Variables and Constants

In a variable declaration, the initial value is optional unless you specify the `NOT NULL` constraint . In a constant declaration, the initial value is required.

If the declaration is in a block or subprogram, the initial value is assigned to the variable or constant every time control passes to the block or subprogram. If the declaration is in a package specification, the initial value is assigned to the variable or constant for each session (whether the variable or constant is public or private).

To specify the initial value, use either the assignment operator (`:=`) or the keyword `DEFAULT`, followed by an expression. The expression can include previously declared constants and previously initialized variables.

If you do not specify an initial value for a variable, assign a value to it before using it in any other context.

Examples

Example 3-13 Variable and Constant Declarations with Initial Values

This example assigns initial values to the constant and variables that it declares. The initial value of `area` depends on the previously declared constant `pi` and the previously initialized variable `radius`.

```
DECLARE
  hours_worked    INTEGER := 40;
  employee_count  INTEGER := 0;

  pi     CONSTANT REAL := 3.14159;
  radius          REAL := 1;
  area            REAL := (pi * radius**2);
BEGIN
  NULL;
END;
/
```

Example 3-14 Variable Initialized to NULL by Default

In this example, the variable `counter` has the initial value `NULL`, by default. The example uses the "IS [NOT] NULL Operator" to show that `NULL` is different from zero.

```
DECLARE
  counter INTEGER;  -- initial value is NULL by default
BEGIN
  counter := counter + 1;  -- NULL + 1 is still NULL

  IF counter IS NULL THEN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    DBMS_OUTPUT.PUT_LINE('counter is NULL.');
  END IF;
END;
/
```

Result:

```
counter is NULL.
```

Related Topics

- "Declaring Associative Array Constants" for information about declaring constant associative arrays
- "Declaring Record Constants" for information about declaring constant records
- "NOT NULL Constraint"

Declaring Items using the %TYPE Attribute

The `%TYPE` attribute lets you declare a data item of the same data type as a previously declared variable or column (without knowing what that type is). If the declaration of the referenced item changes, then the declaration of the referencing item changes accordingly.

The syntax of the declaration is:

```
referencing_item referenced_item%TYPE;
```

For the kinds of items that can be referencing and referenced items, see "%TYPE Attribute".

The referencing item inherits the following from the referenced item:

- Data type and size
- Constraints (unless the referenced item is a column)

The referencing item does not inherit the initial value of the referenced item. Therefore, if the referencing item specifies or inherits the `NOT NULL` constraint, you must specify an initial value for it.

The `%TYPE` attribute is particularly useful when declaring variables to hold database values. The syntax for declaring a variable of the same type as a column is:

```
variable_name table_name.column_name%TYPE;
```

> **See Also**
>
> "Declaring Items using the %ROWTYPE Attribute", which lets you declare a record variable that represents either a full or partial row of a database table or view

Examples

Example 3-15 Declaring Variable of Same Type as Column

In this example, the variable `surname` inherits the data type and size of the column `employees.last_name`, which has a `NOT NULL` constraint. Because `surname` does not inherit the `NOT NULL` constraint, its declaration does not need an initial value.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  surname  employees.last_name%TYPE;
BEGIN
  DBMS_OUTPUT.PUT_LINE('surname=' || surname);
END;
/
```

Result:

```
surname=
```

Example 3-16 Declaring Variable of Same Type as Another Variable

In this example, the variable `surname` inherits the data type, size, and `NOT NULL` constraint of the variable `name`. Because `surname` does not inherit the initial value of `name`, its declaration needs an initial value (which cannot exceed 25 characters).

```
DECLARE
  name     VARCHAR(25) NOT NULL := 'Smith';
  surname  name%TYPE := 'Jones';
BEGIN
  DBMS_OUTPUT.PUT_LINE('name=' || name);
  DBMS_OUTPUT.PUT_LINE('surname=' || surname);
END;
/
```

Result:

```
name=Smith
surname=Jones
```

References to Identifiers

When referencing an identifier, you use a name that is either simple, qualified, remote, or both qualified and remote.

The **simple name** of an identifier is the name in its declaration. For example:

```
DECLARE
  a INTEGER;  -- Declaration
BEGIN
  a := 1;     -- Reference with simple name
END;
/
```

If an identifier is declared in a named PL/SQL unit, you can (and sometimes must) reference it with its **qualified name**. The syntax (called **dot notation**) is:

```
unit_name.simple_identifier_name
```

For example, if package `p` declares identifier `a`, you can reference the identifier with the qualified name `p.a`. The unit name also can (and sometimes must) be qualified. You *must* qualify an identifier when it is not visible (see "Scope and Visibility of Identifiers").

If the identifier names an object on a remote database, you must reference it with its **remote name**. The syntax is:

```
simple_identifier_name@link_to_remote_database
```

If the identifier is declared in a PL/SQL unit on a remote database, you must reference it with its **qualified remote name**. The syntax is:

Copyright © 1996, 2025, Oracle and/or its affiliates.

unit_name.simple_identifier_name@link_to_remote_database

You can create synonyms for remote schema objects, but you cannot create synonyms for objects declared in PL/SQL subprograms or packages. To create a synonym, use the SQL statement `CREATE SYNONYM`, explained in *Oracle Database SQL Language Reference*.

For information about how PL/SQL resolves ambiguous names, see PL/SQL Name Resolution.

> **Note**
>
> You can reference identifiers declared in the packages `STANDARD` and `DBMS_STANDARD` without qualifying them with the package names, unless you have declared a local identifier with the same name (see "Scope and Visibility of Identifiers").

Scope and Visibility of Identifiers

The **scope** of an identifier is the region of a PL/SQL unit from which you can reference the identifier. The **visibility** of an identifier is the region of a PL/SQL unit from which you can reference the identifier without qualifying it. An identifier is **local** to the PL/SQL unit that declares it. If that unit has subunits, the identifier is **global** to them.

If a subunit redeclares a global identifier, then inside the subunit, both identifiers are in scope, but only the local identifier is visible. To reference the global identifier, the subunit must qualify it with the name of the unit that declared it. If that unit has no name, then the subunit cannot reference the global identifier.

A PL/SQL unit cannot reference identifiers declared in other units at the same level, because those identifiers are neither local nor global to the block.

You cannot declare the same identifier twice in the same PL/SQL unit. If you do, an error occurs when you reference the duplicate identifier.

You can declare the same identifier in two different units. The two objects represented by the identifier are distinct. Changing one does not affect the other.

In the same scope, give labels and subprograms unique names to avoid confusion and unexpected results.

Examples

Example 3-17 Scope and Visibility of Identifiers

This example shows the scope and visibility of several identifiers. The first sub-block redeclares the global identifier `a`. To reference the global variable `a`, the first sub-block would have to qualify it with the name of the outer block—but the outer block has no name. Therefore, the first sub-block cannot reference the global variable `a`; it can reference only its local variable `a`. Because the sub-blocks are at the same level, the first sub-block cannot reference `d`, and the second sub-block cannot reference `c`.

```
-- Outer block:
DECLARE
  a CHAR;  -- Scope of a (CHAR) begins
  b REAL;    -- Scope of b begins
BEGIN
  -- Visible: a (CHAR), b

  -- First sub-block:
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DECLARE
    a INTEGER;  -- Scope of a (INTEGER) begins
    c REAL;       -- Scope of c begins
  BEGIN
    -- Visible: a (INTEGER), b, c
    NULL;
  END;          -- Scopes of a (INTEGER) and c end

  -- Second sub-block:
  DECLARE
    d REAL;     -- Scope of d begins
  BEGIN
    -- Visible: a (CHAR), b, d
    NULL;
  END;          -- Scope of d ends

-- Visible: a (CHAR), b
END;            -- Scopes of a (CHAR) and b end
/
```

Example 3-18 Qualifying Redeclared Global Identifier with Block Label

This example labels the outer block with the name `outer`. Therefore, after the sub-block redeclares the global variable `birthdate`, it can reference that global variable by qualifying its name with the block label. The sub-block can also reference its local variable `birthdate`, by its simple name.

```
<<outer>>  -- label
DECLARE
  birthdate DATE := TO_DATE('09-AUG-70', 'DD-MON-YY');
BEGIN
  DECLARE
    birthdate DATE := TO_DATE('29-SEP-70', 'DD-MON-YY');
  BEGIN
    IF birthdate = outer.birthdate THEN
      DBMS_OUTPUT.PUT_LINE ('Same Birthday');
    ELSE
      DBMS_OUTPUT.PUT_LINE ('Different Birthday');
    END IF;
  END;
END;
/
```

Result:

```
Different Birthday
```

Example 3-19 Qualifying Identifier with Subprogram Name

In this example, the procedure `check_credit` declares a variable, `rating`, and a function, `check_rating`. The function redeclares the variable. Then the function references the global variable by qualifying it with the procedure name.

```
CREATE OR REPLACE PROCEDURE check_credit (credit_limit NUMBER) AS
  rating NUMBER := 3;

  FUNCTION check_rating RETURN BOOLEAN IS
    rating  NUMBER := 1;
    over_limit  BOOLEAN;
  BEGIN
    IF check_credit.rating <= credit_limit THEN  -- reference global variable
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      over_limit := FALSE;
    ELSE
      over_limit := TRUE;
      rating := credit_limit;                    -- reference local variable
    END IF;
    RETURN over_limit;
  END check_rating;
BEGIN
  IF check_rating THEN
    DBMS_OUTPUT.PUT_LINE
      ('Credit rating over limit (' || TO_CHAR(credit_limit) || ').  '
      || 'Rating: ' || TO_CHAR(rating));
  ELSE
    DBMS_OUTPUT.PUT_LINE
      ('Credit rating OK.  ' || 'Rating: ' || TO_CHAR(rating));
  END IF;
END;
/

BEGIN
  check_credit(1);
END;
/
```

Result:

```
Credit rating over limit (1).  Rating: 3
```

Example 3-20 Duplicate Identifiers in Same Scope

You cannot declare the same identifier twice in the same PL/SQL unit. If you do, an error occurs when you reference the duplicate identifier, as this example shows.

```
DECLARE
  id  BOOLEAN;
  id  VARCHAR2(5);  -- duplicate identifier
BEGIN
  id := FALSE;
END;
/
```

Result:

```
  id := FALSE;
  *
ERROR at line 5:
ORA-06550: line 5, column 3:
PLS-00371: at most one declaration for 'ID' is permitted
ORA-06550: line 5, column 3:
PL/SQL: Statement ignored
```

Example 3-21 Declaring Same Identifier in Different Units

You can declare the same identifier in two different units. The two objects represented by the identifier are distinct. Changing one does not affect the other, as this example shows. In the same scope, give labels and subprograms unique names to avoid confusion and unexpected results.

```
DECLARE
  PROCEDURE p
  IS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    x VARCHAR2(1);
  BEGIN
    x := 'a';  -- Assign the value 'a' to x
    DBMS_OUTPUT.PUT_LINE('In procedure p, x = ' || x);
  END;

  PROCEDURE q
  IS
    x VARCHAR2(1);
  BEGIN
    x := 'b';  -- Assign the value 'b' to x
    DBMS_OUTPUT.PUT_LINE('In procedure q, x = ' || x);
  END;

BEGIN
  p;
  q;
END;
/
```

Result:

```
In procedure p, x = a
In procedure q, x = b
```

Example 3-22 Label and Subprogram with Same Name in Same Scope

In this example, `echo` is the name of both a block and a subprogram. Both the block and the subprogram declare a variable named `x`. In the subprogram, `echo.x` refers to the local variable `x`, not to the global variable `x`.

```
<<echo>>
DECLARE
  x  NUMBER := 5;

  PROCEDURE echo AS
    x  NUMBER := 0;
  BEGIN
    DBMS_OUTPUT.PUT_LINE('x = ' || x);
    DBMS_OUTPUT.PUT_LINE('echo.x = ' || echo.x);
  END;

BEGIN
  echo;
END;
/
```

Result:

```
x = 0
echo.x = 0
```

Example 3-23 Block with Multiple and Duplicate Labels

This example has two labels for the outer block, `compute_ratio` and `another_label`. The second label appears again in the inner block. In the inner block, `another_label.denominator` refers to the local variable `denominator`, not to the global variable `denominator`, which results in the error `ZERO_DIVIDE`.

```
<<compute_ratio>>
<<another_label>>
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  numerator   NUMBER := 22;
  denominator NUMBER := 7;
BEGIN
  <<another_label>>
  DECLARE
    denominator NUMBER := 0;
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Ratio with compute_ratio.denominator = ');
    DBMS_OUTPUT.PUT_LINE(numerator/compute_ratio.denominator);

    DBMS_OUTPUT.PUT_LINE('Ratio with another_label.denominator = ');
    DBMS_OUTPUT.PUT_LINE(numerator/another_label.denominator);

  EXCEPTION
    WHEN ZERO_DIVIDE THEN
      DBMS_OUTPUT.PUT_LINE('Divide-by-zero error: can''t divide '
        || numerator || ' by ' || denominator);
    WHEN OTHERS THEN
      DBMS_OUTPUT.PUT_LINE('Unexpected error.');
  END another_label;
END compute_ratio;
/
```

Result:

```
Ratio with compute_ratio.denominator =
3.142857142857142857
```

See Also

- "Assigning Values to Collection Variables"
- "Assigning Values to Record Variables"
- "FETCH Statement"

Assigning Values to Variables with the Assignment Statement

To assign the value of an expression to a variable, use this form of the assignment statement:

```
variable_name := expression;
```

For the complete syntax of the assignment statement, see "Assignment Statement".

For the syntax of an expression, see "Expression".

Example 3-24 Assigning Values to Variables with Assignment Statement

This example declares several variables (specifying initial values for some) and then uses assignment statements to assign the values of expressions to them.

```
DECLARE  -- You can assign initial values here
  wages          NUMBER;
  hours_worked   NUMBER := 40;
  hourly_salary  NUMBER := 22.50;
  bonus          NUMBER := 150;
  country        VARCHAR2(128);
  counter        NUMBER := 0;
  done           BOOLEAN;
  valid_id       BOOLEAN;
  emp_rec1       employees%ROWTYPE;
  emp_rec2       employees%ROWTYPE;
  TYPE commissions IS TABLE OF NUMBER INDEX BY PLS_INTEGER;
  comm_tab       commissions;

BEGIN  -- You can assign values here too
  wages := (hours_worked * hourly_salary) + bonus;
  country := 'France';
  country := UPPER('Canada');
  done := (counter > 100);
  valid_id := TRUE;
  emp_rec1.first_name := 'Antonio';
  emp_rec1.last_name := 'Ortiz';
  emp_rec1 := emp_rec2;
  comm_tab(5) := 20000 * 0.15;
END;
/
```

Assigning Values to Variables with the SELECT INTO Statement

A simple form of the `SELECT INTO` statement is:

```
SELECT select_item [, select_item ]...
INTO variable_name [, variable_name ]...
FROM table_name;
```

For each *`select_item`*, there must be a corresponding, type-compatible *`variable_name`*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

For the complete syntax of the `SELECT INTO` statement, see "SELECT INTO Statement".

Example 3-25 Assigning Value to Variable with SELECT INTO Statement

This example uses a `SELECT INTO` statement to assign to the variable `bonus` the value that is 10% of the salary of the employee whose `employee_id` is 100.

```
DECLARE
  bonus   NUMBER(8,2);
BEGIN
  SELECT salary * 0.10 INTO bonus
  FROM employees
  WHERE employee_id = 100;

  DBMS_OUTPUT.PUT_LINE('bonus = ' || TO_CHAR(bonus));
END;

/
```

Result:

```
bonus = 2400
```

Assigning Values to Variables as Parameters of a Subprogram

If you pass a variable to a subprogram as an `OUT` or `IN OUT` parameter, and the subprogram assigns a value to the parameter, the variable retains that value after the subprogram finishes running. For more information, see "Subprogram Parameters".

Example 3-26 Assigning Value to Variable as IN OUT Subprogram Parameter

This example passes the variable `new_sal` to the procedure `adjust_salary`. The procedure assigns a value to the corresponding formal parameter, `sal`. Because `sal` is an `IN OUT` parameter, the variable `new_sal` retains the assigned value after the procedure finishes running.

```
DECLARE
  emp_salary  NUMBER(8,2);

  PROCEDURE adjust_salary (
    emp        NUMBER,
    sal IN OUT NUMBER,
    adjustment NUMBER
  ) IS
  BEGIN
    sal := sal + adjustment;
  END;

BEGIN
  SELECT salary INTO emp_salary
  FROM employees
  WHERE employee_id = 100;

  DBMS_OUTPUT.PUT_LINE
   ('Before invoking procedure, emp_salary: ' || emp_salary);

  adjust_salary (100, emp_salary, 1000);

  DBMS_OUTPUT.PUT_LINE
   ('After invoking procedure, emp_salary: ' || emp_salary);
END;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
/
```

Result:

```
Before invoking procedure, emp_salary: 24000
After invoking procedure, emp_salary: 25000
```

Assigning Values to BOOLEAN Variables

The only values that you can assign to a `BOOLEAN` variable are `TRUE`, `FALSE`, and `NULL`.

For more information about the `BOOLEAN` data type, see "BOOLEAN Data Type".

Example 3-27 Assigning Value to BOOLEAN Variable

This example initializes the `BOOLEAN` variable `done` to `NULL` by default, assigns it the literal value `FALSE`, compares it to the literal value `TRUE`, and assigns it the value of a `BOOLEAN` expression.

```
DECLARE
  done    BOOLEAN;              -- Initial value is NULL by default
  counter NUMBER := 0;
BEGIN
  done := FALSE;                -- Assign literal value
  WHILE done != TRUE            -- Compare to literal value
    LOOP
      counter := counter + 1;
      done := (counter > 500);  -- Assign value of BOOLEAN expression
    END LOOP;
END;
/
```

Expressions

An expression is a combination of one or more values, operators, and SQL functions that evaluates to a value.

An expression always returns a single value. The simplest expressions, in order of increasing complexity, are:

1. A single constant or variable (for example, `a`)
2. A unary operator and its single operand (for example, `-a`)
3. A binary operator and its two operands (for example, `a+b`)

An **operand** can be a variable, constant, literal, operator, function invocation, or placeholder—or another expression. Therefore, expressions can be arbitrarily complex. For expression syntax, see Expression.

The data types of the operands determine the data type of the expression. Every time the expression is evaluated, a single value of that data type results. The data type of that result is the data type of the expression.

Topics

- Concatenation Operator
- Operator Precedence
- Logical Operators

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Short-Circuit Evaluation
- Comparison Operators
- BOOLEAN Expressions
- CASE Expressions
- SQL Functions in PL/SQL Expressions

Concatenation Operator

The concatenation operator (||) appends one string operand to another.

The concatenation operator ignores null operands.

For more information about the syntax of the concatenation operator, see "*character_expression ::=*".

Example 3-28 Concatenation Operator

```
DECLARE
  x VARCHAR2(4) := 'suit';
  y VARCHAR2(4) := 'case';
BEGIN
  DBMS_OUTPUT.PUT_LINE (x || y);
END;
/
```

Result:

```
suitcase
```

Example 3-29 Concatenation Operator with NULL Operands

The concatenation operator ignores null operands, as this example shows.

```
BEGIN
  DBMS_OUTPUT.PUT_LINE ('apple' || NULL || NULL || 'sauce');
END;
/
```

Result:

```
applesauce
```

Operator Precedence

An **operation** is either a unary operator and its single operand or a binary operator and its two operands. The operations in an expression are evaluated in order of operator precedence.

Table 3-3 shows operator precedence from highest to lowest. Operators with equal precedence are evaluated in no particular order.

Table 3-3 Operator Precedence

Operator	Operation
**	exponentiation

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 3-3 (Cont.) Operator Precedence

Operator	Operation
+, -	identity, negation
*, /	multiplication, division
+, -, ||	addition, subtraction, concatenation
=, <, >, <=, >=, <>, !=, ~=, ^=, IS NULL, LIKE, BETWEEN, IN	comparison
NOT	negation
AND	conjunction
OR	inclusion

To control the order of evaluation, enclose operations in parentheses, as in Example 3-30.

When parentheses are nested, the most deeply nested operations are evaluated first.

You can also use parentheses to improve readability where the parentheses do not affect evaluation order.

Example 3-30 Controlling Evaluation Order with Parentheses

```
DECLARE
  a INTEGER := 1+2**2;
  b INTEGER := (1+2)**2;
BEGIN
  DBMS_OUTPUT.PUT_LINE('a = ' || TO_CHAR(a));
  DBMS_OUTPUT.PUT_LINE('b = ' || TO_CHAR(b));
END;
/
```

Result:

```
a = 5
b = 9
```

Example 3-31 Expression with Nested Parentheses

In this example, the operations (1+2) and (3+4) are evaluated first, producing the values 3 and 7, respectively. Next, the operation 3*7 is evaluated, producing the result 21. Finally, the operation 21/7 is evaluated, producing the final value 3.

```
DECLARE
  a INTEGER := ((1+2)*(3+4))/7;
BEGIN
  DBMS_OUTPUT.PUT_LINE('a = ' || TO_CHAR(a));
END;
/
```

Result:

```
a = 3
```

Example 3-32 Improving Readability with Parentheses

In this example, the parentheses do not affect the evaluation order. They only improve readability.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  a INTEGER := 2**2*3**2;
  b INTEGER := (2**2)*(3**2);
BEGIN
  DBMS_OUTPUT.PUT_LINE('a = ' || TO_CHAR(a));
  DBMS_OUTPUT.PUT_LINE('b = ' || TO_CHAR(b));
END;
/
```

Result:

```
a = 36
b = 36
```

Example 3-33 Operator Precedence

This example shows the effect of operator precedence and parentheses in several more complex expressions.

```
DECLARE
  salary      NUMBER := 60000;
  commission  NUMBER := 0.10;
BEGIN
  -- Division has higher precedence than addition:

  DBMS_OUTPUT.PUT_LINE('5 + 12 / 4 = ' || TO_CHAR(5 + 12 / 4));
  DBMS_OUTPUT.PUT_LINE('12 / 4 + 5 = ' || TO_CHAR(12 / 4 + 5));

 -- Parentheses override default operator precedence:

  DBMS_OUTPUT.PUT_LINE('8 + 6 / 2 = ' || TO_CHAR(8 + 6 / 2));
  DBMS_OUTPUT.PUT_LINE('(8 + 6) / 2 = ' || TO_CHAR((8 + 6) / 2));

  -- Most deeply nested operation is evaluated first:

  DBMS_OUTPUT.PUT_LINE('100 + (20 / 5 + (7 - 3)) = '
                       || TO_CHAR(100 + (20 / 5 + (7 - 3))));

  -- Parentheses, even when unnecessary, improve readability:

  DBMS_OUTPUT.PUT_LINE('(salary * 0.05) + (commission * 0.25) = '
    || TO_CHAR((salary * 0.05) + (commission * 0.25))
  );

  DBMS_OUTPUT.PUT_LINE('salary * 0.05 + commission * 0.25 = '
    || TO_CHAR(salary * 0.05 + commission * 0.25)
  );
END;
/
```

Result:

```
5 + 12 / 4 = 8
12 / 4 + 5 = 8
8 + 6 / 2 = 11
(8 + 6) / 2 = 7
100 + (20 / 5 + (7 - 3)) = 108
(salary * 0.05) + (commission * 0.25) = 3000.025
salary * 0.05 + commission * 0.25 = 3000.025
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Logical Operators

The logical operators AND, OR, and NOT follow a tri-state logic.

AND and OR are binary operators; NOT is a unary operator.

Table 3-4 Logical Truth Table

x	y	x AND y	x OR y	NOT x
TRUE	TRUE	TRUE	TRUE	FALSE
TRUE	FALSE	FALSE	TRUE	FALSE
TRUE	NULL	NULL	TRUE	FALSE
FALSE	TRUE	FALSE	TRUE	TRUE
FALSE	FALSE	FALSE	FALSE	TRUE
FALSE	NULL	FALSE	NULL	TRUE
NULL	TRUE	NULL	TRUE	NULL
NULL	FALSE	FALSE	NULL	NULL
NULL	NULL	NULL	NULL	NULL

AND returns TRUE if and only if both operands are TRUE.

OR returns TRUE if either operand is TRUE.

NOT returns the opposite of its operand, unless the operand is NULL. NOTNULL returns NULL, because NULL is an indeterminate value.

Example 3-34 Procedure Prints BOOLEAN Variable

This example creates a procedure, print_boolean, that prints the value of a BOOLEAN variable. The procedure uses the "IS [NOT] NULL Operator". Several examples in this chapter invoke print_boolean.

```
CREATE OR REPLACE PROCEDURE print_boolean (
  b_name   VARCHAR2,
  b_value  BOOLEAN
) AUTHID DEFINER IS
BEGIN
  IF b_value IS NULL THEN
    DBMS_OUTPUT.PUT_LINE (b_name || ' = NULL');
  ELSIF b_value = TRUE THEN
    DBMS_OUTPUT.PUT_LINE (b_name || ' = TRUE');
  ELSE
    DBMS_OUTPUT.PUT_LINE (b_name || ' = FALSE');
  END IF;
END;
/
```

Example 3-35 AND Operator

As Table 3-4 and this example show, AND returns TRUE if and only if both operands are TRUE.

```
DECLARE
  PROCEDURE print_x_and_y (
    x  BOOLEAN,
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    y  BOOLEAN
  ) IS
  BEGIN
   print_boolean ('x', x);
   print_boolean ('y', y);
   print_boolean ('x AND y', x AND y);
 END print_x_and_y;

BEGIN
 print_x_and_y (FALSE, FALSE);
 print_x_and_y (TRUE, FALSE);
 print_x_and_y (FALSE, TRUE);
 print_x_and_y (TRUE, TRUE);

 print_x_and_y (TRUE, NULL);
 print_x_and_y (FALSE, NULL);
 print_x_and_y (NULL, TRUE);
 print_x_and_y (NULL, FALSE);
END;
/
```

Result:

```
x = FALSE
y = FALSE
x AND y = FALSE
x = TRUE
y = FALSE
x AND y = FALSE
x = FALSE
y = TRUE
x AND y = FALSE
x = TRUE
y = TRUE
x AND y = TRUE
x = TRUE
y = NULL
x AND y = NULL
x = FALSE
y = NULL
x AND y = FALSE
x = NULL
y = TRUE
x AND y = NULL
x = NULL
y = FALSE
x AND y = FALSE
```

Example 3-36 OR Operator

As Table 3-4 and this example show, `OR` returns `TRUE` if either operand is `TRUE`. (This example invokes the `print_boolean` procedure from Example 3-34.)

```
DECLARE
  PROCEDURE print_x_or_y (
    x  BOOLEAN,
    y  BOOLEAN
  ) IS
  BEGIN
    print_boolean ('x', x);
    print_boolean ('y', y);
    print_boolean ('x OR y', x OR y);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END print_x_or_y;

BEGIN
  print_x_or_y (FALSE, FALSE);
  print_x_or_y (TRUE, FALSE);
  print_x_or_y (FALSE, TRUE);
  print_x_or_y (TRUE, TRUE);

  print_x_or_y (TRUE, NULL);
  print_x_or_y (FALSE, NULL);
  print_x_or_y (NULL, TRUE);
  print_x_or_y (NULL, FALSE);
END;
/
```

Result:

```
x = FALSE
y = FALSE
x OR y = FALSE
x = TRUE
y = FALSE
x OR y = TRUE
x = FALSE
y = TRUE
x OR y = TRUE
x = TRUE
y = TRUE
x OR y = TRUE
x = TRUE
y = NULL
x OR y = TRUE
x = FALSE
y = NULL
x OR y = NULL
x = NULL
y = TRUE
x OR y = TRUE
x = NULL
y = FALSE
x OR y = NULL
```

Example 3-37 NOT Operator

As Table 3-4 and this example show, `NOT` returns the opposite of its operand, unless the operand is `NULL`. `NOT NULL` returns `NULL`, because `NULL` is an indeterminate value. (This example invokes the `print_boolean` procedure from Example 3-34.)

```
DECLARE
  PROCEDURE print_not_x (
    x  BOOLEAN
  ) IS
  BEGIN
    print_boolean ('x', x);
    print_boolean ('NOT x', NOT x);
  END print_not_x;

BEGIN
  print_not_x (TRUE);
  print_not_x (FALSE);
  print_not_x (NULL);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
x = TRUE
NOT x = FALSE
x = FALSE
NOT x = TRUE
x = NULL
NOT x = NULL
```

Example 3-38 NULL Value in Unequal Comparison

In this example, you might expect the sequence of statements to run because `x` and `y` seem unequal. But, `NULL` values are indeterminate. Whether `x` equals `y` is unknown. Therefore, the `IF` condition yields `NULL` and the sequence of statements is bypassed.

```
DECLARE
  x NUMBER := 5;
  y NUMBER := NULL;
BEGIN
  IF x != y THEN  -- yields NULL, not TRUE
    DBMS_OUTPUT.PUT_LINE('x != y');  -- not run
  ELSIF x = y THEN -- also yields NULL
    DBMS_OUTPUT.PUT_LINE('x = y');
  ELSE
    DBMS_OUTPUT.PUT_LINE
      ('Can''t tell if x and y are equal or not.');
  END IF;
END;
/
```

Result:

```
Can't tell if x and y are equal or not.
```

Example 3-39 NULL Value in Equal Comparison

In this example, you might expect the sequence of statements to run because `a` and `b` seem equal. But, again, that is unknown, so the `IF` condition yields `NULL` and the sequence of statements is bypassed.

```
DECLARE
  a NUMBER := NULL;
  b NUMBER := NULL;
BEGIN
  IF a = b THEN  -- yields NULL, not TRUE
    DBMS_OUTPUT.PUT_LINE('a = b');  -- not run
  ELSIF a != b THEN  -- yields NULL, not TRUE
    DBMS_OUTPUT.PUT_LINE('a != b');  -- not run
  ELSE
    DBMS_OUTPUT.PUT_LINE('Can''t tell if two NULLs are equal');
  END IF;
END;
/
```

Result:

```
Can't tell if two NULLs are equal
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 3-40 NOT NULL Equals NULL

In this example, the two `IF` statements appear to be equivalent. However, if either `x` or `y` is `NULL`, then the first `IF` statement assigns the value of `y` to `high` and the second `IF` statement assigns the value of `x` to `high`.

```
DECLARE
  x    INTEGER := 2;
  Y    INTEGER := 5;
  high INTEGER;
BEGIN
  IF (x > y)       -- If x or y is NULL, then (x > y) is NULL
    THEN high := x;  -- run if (x > y) is TRUE
    ELSE high := y;  -- run if (x > y) is FALSE or NULL
  END IF;

  IF NOT (x > y)   -- If x or y is NULL, then NOT (x > y) is NULL
    THEN high := y;  -- run if NOT (x > y) is TRUE
    ELSE high := x;  -- run if NOT (x > y) is FALSE or NULL
  END IF;
END;
/
```

Example 3-41 Changing Evaluation Order of Logical Operators

This example invokes the `print_boolean` procedure from Example 3-34 three times. The third and first invocation are logically equivalent—the parentheses in the third invocation only improve readability. The parentheses in the second invocation change the order of operation.

```
DECLARE
  x  BOOLEAN := FALSE;
  y  BOOLEAN := FALSE;

BEGIN
  print_boolean ('NOT x AND y', NOT x AND y);
  print_boolean ('NOT (x AND y)', NOT (x AND y));
  print_boolean ('(NOT x) AND y', (NOT x) AND y);
END;
/
```

Result:

```
NOT x AND y = FALSE
NOT (x AND y) = TRUE
(NOT x) AND y = FALSE
```

Short-Circuit Evaluation

When evaluating a logical expression, PL/SQL uses **short-circuit evaluation**. That is, PL/SQL stops evaluating the expression as soon as it can determine the result.

Therefore, you can write expressions that might otherwise cause errors.

In Example 3-42, short-circuit evaluation prevents the `OR` expression from causing a divide-by-zero error. When the value of `on_hand` is zero, the value of the left operand is `TRUE`, so PL/SQL does not evaluate the right operand. If PL/SQL evaluated both operands before applying the `OR` operator, the right operand would cause a division by zero error.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 3-42 Short-Circuit Evaluation

```
DECLARE
  on_hand  INTEGER := 0;
  on_order INTEGER := 100;
BEGIN
  -- Does not cause divide-by-zero error;
  -- evaluation stops after first expression

  IF (on_hand = 0) OR ((on_order / on_hand) < 5) THEN
    DBMS_OUTPUT.PUT_LINE('On hand quantity is zero.');
  END IF;
END;
/
```

Result:

```
On hand quantity is zero.
```

Comparison Operators

Comparison operators compare one expression to another. The result is always either `TRUE`, `FALSE`, or `NULL`.

If the value of one expression is `NULL`, then the result of the comparison is also `NULL`.

The comparison operators are:

- IS [NOT] NULL Operator
- Relational Operators
- LIKE Operator
- BETWEEN Operator
- IN Operator

> **Note**
>
> Character comparisons are affected by NLS parameter settings, which can change at runtime. Therefore, character comparisons are evaluated at runtime, and the same character comparison can have different values at different times. For information about NLS parameters that affect character comparisons, see *Oracle Database Globalization Support Guide*.

> **Note**
>
> Using `CLOB` values with comparison operators can create temporary LOB values. Ensure that your temporary tablespace is large enough to handle them.

IS [NOT] NULL Operator

The `IS NULL` operator returns the `BOOLEAN` value `TRUE` if its operand is `NULL` or `FALSE` if it is not `NULL`. The `IS NOT NULL` operator does the opposite.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Comparisons involving `NULL` values always yield `NULL`.

To test whether a value is `NULL`, use `IF` *`value`* `IS NULL`, as in these examples:

- Example 3-14, "Variable Initialized to NULL by Default"
- Example 3-34, "Procedure Prints BOOLEAN Variable"
- Example 3-55, "Searched CASE Expression with WHEN ... IS NULL"

Relational Operators

This table summarizes the relational operators.

Table 3-5 Relational Operators

Operator	Meaning
=	equal to
<>, !=, ~=, ^=	not equal to
<	less than
>	greater than
<=	less than or equal to
>=	greater than or equal to

Topics

- Arithmetic Comparisons
- BOOLEAN Comparisons
- Character Comparisons
- Date Comparisons

Arithmetic Comparisons

One number is greater than another if it represents a larger quantity.

Real numbers are stored as approximate values, so Oracle recommends comparing them for equality or inequality.

Example 3-43 Relational Operators in Expressions

This example invokes the `print_boolean` procedure from Example 3-35 to print the values of expressions that use relational operators to compare arithmetic values.

```
BEGIN
  print_boolean ('(2 + 2 =  4)', 2 + 2 = 4);

  print_boolean ('(2 + 2 <> 4)', 2 + 2 <> 4);
  print_boolean ('(2 + 2 != 4)', 2 + 2 != 4);
  print_boolean ('(2 + 2 ~= 4)', 2 + 2 ~= 4);
  print_boolean ('(2 + 2 ^= 4)', 2 + 2  ^= 4);

  print_boolean ('(1 < 2)', 1 < 2);

  print_boolean ('(1 > 2)', 1 > 2);

  print_boolean ('(1 <= 2)', 1 <= 2);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  print_boolean ('(1 >= 1)', 1 >= 1);
END;
/
```

Result:

```
(2 + 2 =  4) = TRUE
(2 + 2 <> 4) = FALSE
(2 + 2 != 4) = FALSE
(2 + 2 ~= 4) = FALSE
(2 + 2 ^= 4) = FALSE
(1 < 2) = TRUE
(1 > 2) = FALSE
(1 <= 2) = TRUE
(1 >= 1) = TRUE
```

BOOLEAN Comparisons

By definition, `TRUE` is greater than `FALSE`. Any comparison with `NULL` returns `NULL`.

Character Comparisons

By default, one character is greater than another if its binary value is larger.

For example, this expression is true:

```
'y' > 'r'
```

Strings are compared character by character. For example, this expression is true:

```
'Kathy' > 'Kathryn'
```

If you set the initialization parameter `NLS_COMP=ANSI`, string comparisons use the collating sequence identified by the `NLS_SORT` initialization parameter.

A **collating sequence** is an internal ordering of the character set in which a range of numeric codes represents the individual characters. One character value is greater than another if its internal numeric value is larger. Each language might have different rules about where such characters occur in the collating sequence. For example, an accented letter might be sorted differently depending on the database character set, even though the binary value is the same in each case.

By changing the value of the `NLS_SORT` parameter, you can perform comparisons that are case-insensitive and accent-insensitive.

A **case-insensitive comparison** treats corresponding uppercase and lowercase letters as the same letter. For example, these expressions are true:

```
'a' = 'A'
'Alpha' = 'ALPHA'
```

To make comparisons case-insensitive, append `_CI` to the value of the `NLS_SORT` parameter (for example, `BINARY_CI` or `XGERMAN_CI`).

An **accent-insensitive comparison** is case-insensitive, and also treats letters that differ only in accents or punctuation characters as the same letter. For example, these expressions are true:

```
'Cooperate' = 'Co-Operate'
'Co-Operate' = 'coöperate'
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

To make comparisons both case-insensitive and accent-insensitive, append `_AI` to the value of the `NLS_SORT` parameter (for example, `BINARY_AI` or `FRENCH_M_AI`).

Semantic differences between the `CHAR` and `VARCHAR2` data types affect character comparisons.

For more information, see "Value Comparisons".

Date Comparisons

One date is greater than another if it is more recent.

For example, this expression is true:

```
'01-JAN-91' > '31-DEC-90'
```

LIKE Operator

The `LIKE` operator compares a character, string, or `CLOB` value to a pattern and returns `TRUE` if the value matches the pattern and `FALSE` if it does not.

Case is significant.

The pattern can include the two **wildcard characters** underscore (_) and percent sign (%).

Underscore matches exactly one character.

Percent sign (%) matches zero or more characters.

To search for the percent sign or underscore, define an escape character and put it before the percent sign or underscore.

> **See Also**
>
> - *Oracle Database SQL Language Reference* for more information about `LIKE`
> - *Oracle Database SQL Language Reference* for information about `REGEXP_LIKE`, which is similar to `LIKE`

Example 3-44 LIKE Operator in Expression

The string `'Johnson'` matches the pattern `'J%s_n'` but not `'J%S_N'`, as this example shows.

```
DECLARE
  PROCEDURE compare (
    value   VARCHAR2,
    pattern VARCHAR2
  ) IS
  BEGIN
    IF value LIKE pattern THEN
      DBMS_OUTPUT.PUT_LINE ('TRUE');
    ELSE
      DBMS_OUTPUT.PUT_LINE ('FALSE');
    END IF;
  END;
BEGIN
  compare('Johnson', 'J%s_n');
  compare('Johnson', 'J%S_N');
END;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
/
```

Result:

```
TRUE
FALSE
```

Example 3-45 Escape Character in Pattern

This example uses the backslash as the escape character, so that the percent sign in the string does not act as a wildcard.

```
DECLARE
  PROCEDURE half_off (sale_sign VARCHAR2) IS
  BEGIN
    IF sale_sign LIKE '50\% off!' ESCAPE '\' THEN
      DBMS_OUTPUT.PUT_LINE ('TRUE');
    ELSE
      DBMS_OUTPUT.PUT_LINE ('FALSE');
    END IF;
  END;
BEGIN
  half_off('Going out of business!');
  half_off('50% off!');
END;
/
```

Result:

```
FALSE
TRUE
```

BETWEEN Operator

The `BETWEEN` operator tests whether a value lies in a specified range.

The value of the expression `x BETWEEN a AND b` is defined to be the same as the value of the expression `(x>=a) AND (x<=b)`. The expression `x` will only be evaluated once.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about `BETWEEN`

Example 3-46 BETWEEN Operator in Expressions

This example invokes the `print_boolean` procedure from Example 3-34 to print the values of expressions that include the `BETWEEN` operator.

```
BEGIN
  print_boolean ('2 BETWEEN 1 AND 3', 2 BETWEEN 1 AND 3);
  print_boolean ('2 BETWEEN 2 AND 3', 2 BETWEEN 2 AND 3);
  print_boolean ('2 BETWEEN 1 AND 2', 2 BETWEEN 1 AND 2);
  print_boolean ('2 BETWEEN 3 AND 4', 2 BETWEEN 3 AND 4);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
2 BETWEEN 1 AND 3 = TRUE
2 BETWEEN 2 AND 3 = TRUE
2 BETWEEN 1 AND 2 = TRUE
2 BETWEEN 3 AND 4 = FALSE
```

IN Operator

The `IN` operator tests set membership.

`x IN (set)` returns `TRUE` only if `x` equals a member of *`set`*.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about `IN`

Example 3-47 IN Operator in Expressions

This example invokes the `print_boolean` procedure from Example 3-34 to print the values of expressions that include the `IN` operator.

```
DECLARE
  letter VARCHAR2(1) := 'm';
BEGIN
  print_boolean (
    'letter IN (''a'', ''b'', ''c'')',
    letter IN ('a', 'b', 'c')
  );
  print_boolean (
    'letter IN (''z'', ''m'', ''y'', ''p'')',
    letter IN ('z', 'm', 'y', 'p')
  );
END;
/
```

Result:

```
letter IN ('a', 'b', 'c') = FALSE
letter IN ('z', 'm', 'y', 'p') = TRUE
```

Example 3-48 IN Operator with Sets with NULL Values

This example shows what happens when *`set`* includes a `NULL` value. This invokes the `print_boolean` procedure from Example 3-34.

```
DECLARE
  a INTEGER; -- Initialized to NULL by default
  b INTEGER := 10;
  c INTEGER := 100;
BEGIN
  print_boolean ('100 IN (a, b, c)', 100 IN (a, b, c));
  print_boolean ('100 NOT IN (a, b, c)', 100 NOT IN (a, b, c));

  print_boolean ('100 IN (a, b)', 100 IN (a, b));
  print_boolean ('100 NOT IN (a, b)', 100 NOT IN (a, b));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  print_boolean ('a IN (a, b)', a IN (a, b));
  print_boolean ('a NOT IN (a, b)', a NOT IN (a, b));
END;
/
```

Result:

```
100 IN (a, b, c) = TRUE
100 NOT IN (a, b, c) = FALSE
100 IN (a, b) = NULL
100 NOT IN (a, b) = NULL
a IN (a, b) = NULL
a NOT IN (a, b) = NULL
```

BOOLEAN Expressions

A **BOOLEAN expression** is an expression that returns a BOOLEAN value—TRUE, FALSE, or NULL.

The simplest BOOLEAN expression is a BOOLEAN literal, constant, or variable. The following are also BOOLEAN expressions:

```
NOT boolean_expression
boolean_expression relational_operator boolean_expression
boolean_expression { AND | OR } boolean_expression
```

For a list of relational operators, see Table 3-5. For the complete syntax of a BOOLEAN expression, see "*boolean_expression* ::=".

Typically, you use BOOLEAN expressions as conditions in control statements (explained in PL/SQL Control Statements) and in WHERE clauses of DML statements.

You can use a BOOLEAN variable itself as a condition; you need not compare it to the value TRUE or FALSE.

Example 3-49 Equivalent BOOLEAN Expressions

In this example, the conditions in the loops are equivalent.

```
DECLARE
  done BOOLEAN;
BEGIN
  -- These WHILE loops are equivalent

  done := FALSE;
  WHILE done = FALSE
    LOOP
      done := TRUE;
    END LOOP;

  done := FALSE;
  WHILE NOT (done = TRUE)
    LOOP
      done := TRUE;
    END LOOP;

  done := FALSE;
  WHILE NOT done
    LOOP
      done := TRUE;
    END LOOP;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

CASE Expressions

Topics

- Simple CASE Expression
- Searched CASE Expression

Simple CASE Expression

For this explanation, assume that a simple `CASE` expression has this syntax:

```
CASE selector
WHEN { selector_value_1a | dangling_predicate_1a }
  [ , ..., { selector_value_1n | dangling_predicate_1n } ] THEN result_1
WHEN { selector_value_2a | dangling_predicate_2a }
  [ , ..., { selector_value_2n | dangling_predicate_2n } ] THEN result_2
...
WHEN { selector_value_na | dangling_predicate_na }
  [ , ..., { selector_value_nn | dangling_predicate_nn }] THEN result_n
[ ELSE
  else_result ]
END;
```

The *selector* is an expression (typically a single variable). Each *selector_value* and each *result* can be either a literal or an expression. A *dangling_predicate* can also be used either instead of or in combination with one or multiple *selector_values*. At least one *result* must not be the literal `NULL`.

A *dangling_predicate* is an ordinary expression with its left operand missing, for example < 2. Using a *dangling_predicate* allows for more complicated comparisons that would otherwise require a searched `CASE` statement.

The simple `CASE` expression returns the first *result* for which the *selector_value* or *dangling_predicate* matches *selector*. Remaining expressions are not evaluated. If no *selector_value* or *dangling_predicate* matches *selector*, the `CASE` expression returns *else_result* if it exists and `NULL` otherwise.

A list of comma-separated *selector_values* and or *dangling_predicates* can be used with each `WHEN` clause if multiple choices map to a single *result*. As with *selector_values* and *dangling_predicates* listed in separate `WHEN` clauses, only the first *selector_value* or *dangling_predicate* to match the *selector* is evaluated.

> **See Also**
>
> "*simple_case_expression ::=*" for the complete syntax

Example 3-50 Simple CASE Expression

This example assigns the value of a simple `CASE` expression to the variable `appraisal`. The *selector* is `grade`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  grade CHAR(1) := 'B';
  appraisal VARCHAR2(20);
BEGIN
  appraisal :=
    CASE grade
      WHEN 'A' THEN 'Excellent'
      WHEN 'B' THEN 'Very Good'
      WHEN 'C' THEN 'Good'
      WHEN 'D' THEN 'Fair'
      WHEN 'F' THEN 'Poor'
      ELSE 'No such grade'
    END;
    DBMS_OUTPUT.PUT_LINE ('Grade ' || grade || ' is ' || appraisal);
END;
/
```

Result:

```
Grade B is Very Good
```

Example 3-51 Simple CASE Expression with WHEN NULL

If *selector* has the value NULL, it cannot be matched by WHEN NULL, as this example shows.

Instead, use a searched CASE expression with WHEN *boolean_expression* IS NULL, as in Example 3-55.

```
DECLARE
  grade CHAR(1); -- NULL by default
  appraisal VARCHAR2(20);
BEGIN
  appraisal :=
  CASE grade
    WHEN NULL THEN 'No grade assigned'
    WHEN 'A' THEN 'Excellent'
    WHEN 'B' THEN 'Very Good'
    WHEN 'C' THEN 'Good'
    WHEN 'D' THEN 'Fair'
    WHEN 'F' THEN 'Poor'
    ELSE 'No such grade'
  END;
  DBMS_OUTPUT.PUT_LINE ('Grade ' || grade || ' is ' || appraisal);
END;
/
```

Result:

```
Grade  is No such grade
```

Example 3-52 Simple CASE Expression with List of selector_values

```
DECLARE
    salary NUMBER := 7000;
    salary_level VARCHAR2(20);
BEGIN
    salary_level :=
    CASE salary
        WHEN 1000, 2000 THEN 'low'
        WHEN 3000, 4000, 5000 THEN 'normal'
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
        WHEN 6000, 7000, 8000 THEN 'high'
        ELSE 'executive pay'
    END;
    DBMS_OUTPUT.PUT_LINE('Salary level is: ' || salary_level);
END;
/
```

Result:

```
Salary level is: high
```

Example 3-53 Simple CASE Expression with Dangling Predicates

The value of `data_val/2` is used as the left operand during evaluation of the *`dangling_predicates`*. Using a simple `CASE` expression as opposed to a searched `CASE` expression in this situation avoids repeated computation of the *`selector`* expression. You can use a list of conditions with any combination of *`selector_values`* and *`dangling_predicates`*.

```
DECLARE
    data_val NUMBER := 30;
    status VARCHAR2(20);
BEGIN
    status :=
    CASE data_val/2
        WHEN < 0, > 50 THEN 'outlier'
        WHEN BETWEEN 10 AND 30 THEN 'good'
        ELSE 'bad'
    END;
    DBMS_OUTPUT.PUT_LINE('The data status is: ' || status);
END;
/
```

Result:

```
The data status is: good
```

Searched CASE Expression

For this explanation, assume that a searched `CASE` expression has this syntax:

```
CASE
WHEN boolean_expression_1 THEN result_1
WHEN boolean_expression_2 THEN result_2
...
WHEN boolean_expression_n THEN result_n
[ ELSE
  else_result ]
END]
```

The searched `CASE` expression returns the first *`result`* for which *`boolean_expression`* is `TRUE`. Remaining expressions are not evaluated. If no *`boolean_expression`* is `TRUE`, the `CASE` expression returns *`else_result`* if it exists and `NULL` otherwise.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> "*searched_case_expression ::=*" for the complete syntax

Example 3-54 Searched CASE Expression

This example assigns the value of a searched `CASE` expression to the variable `appraisal`.

```
DECLARE
  grade      CHAR(1) := 'B';
  appraisal  VARCHAR2(120);
  id         NUMBER  := 8429862;
  attendance NUMBER := 150;
  min_days   CONSTANT NUMBER := 200;

  FUNCTION attends_this_school (id NUMBER)
    RETURN BOOLEAN IS
  BEGIN
    RETURN TRUE;
  END;
BEGIN
  appraisal :=
  CASE
    WHEN attends_this_school(id) = FALSE
      THEN 'Student not enrolled'
    WHEN grade = 'F' OR attendance < min_days
      THEN 'Poor (poor performance or bad attendance)'
    WHEN grade = 'A' THEN 'Excellent'
    WHEN grade = 'B' THEN 'Very Good'
    WHEN grade = 'C' THEN 'Good'
    WHEN grade = 'D' THEN 'Fair'
    ELSE 'No such grade'
  END;
  DBMS_OUTPUT.PUT_LINE
    ('Result for student ' || id || ' is ' || appraisal);
END;
/
```

Result:

```
Result for student 8429862 is Poor (poor performance or bad attendance)
```

Example 3-55 Searched CASE Expression with WHEN ... IS NULL

This example uses a searched `CASE` expression to solve the problem in Example 3-51.

```
DECLARE
  grade CHAR(1); -- NULL by default
  appraisal VARCHAR2(20);
BEGIN
  appraisal :=
    CASE
      WHEN grade IS NULL THEN 'No grade assigned'
      WHEN grade = 'A' THEN 'Excellent'
      WHEN grade = 'B' THEN 'Very Good'
      WHEN grade = 'C' THEN 'Good'
      WHEN grade = 'D' THEN 'Fair'
      WHEN grade = 'F' THEN 'Poor'
      ELSE 'No such grade'
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    END;
    DBMS_OUTPUT.PUT_LINE ('Grade ' || grade || ' is ' || appraisal);
END;
/
```

Result:

```
Grade  is No grade assigned
```

SQL Functions in PL/SQL Expressions

In PL/SQL expressions, you can use all SQL functions except:

- Aggregate functions (such as `AVG` and `COUNT`)
- Aggregate function `JSON_ARRAYAGG`
- Aggregate function `JSON_DATAGUIDE`
- Aggregate function `JSON_MERGEPATCH`
- Aggregate function `JSON_OBJECTAGG`
- `JSON_TABLE`
- `JSON_TRANSFORM`
- JSON condition `JSON_TEXTCONTAINS`
- Analytic functions (such as `LAG` and `RATIO_TO_REPORT`)
- Conversion function `BIN_TO_NUM`
- Data mining functions (such as `CLUSTER_ID` and `FEATURE_VALUE`)
- Encoding and decoding functions (such as `DECODE` and `DUMP`)
- Model functions (such as `ITERATION_NUMBER` and `PREVIOUS`)
- Object reference functions (such as `REF` and `VALUE`)
- XML functions
- These collation SQL operators and functions:
  - `COLLATE` operator
  - `COLLATION` function
  - `NLS_COLLATION_ID` function
  - `NLS_COLLATION_NAME` function
- These miscellaneous functions:
  - `CUBE_TABLE`
  - `DATAOBJ_TO_PARTITION`
  - `LNNVL`
  - `SYS_CONNECT_BY_PATH`
  - `SYS_TYPEID`
  - `WIDTH_BUCKET`

PL/SQL supports an overload of `BITAND` for which the arguments and result are `BINARY_INTEGER`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

When used in a PL/SQL expression, the `RAWTOHEX` function accepts an argument of data type `RAW` and returns a `VARCHAR2` value with the hexadecimal representation of bytes that comprise the value of the argument. Arguments of types other than `RAW` can be specified only if they can be implicitly converted to `RAW`. This conversion is possible for `CHAR`, `VARCHAR2`, and `LONG` values that are valid arguments of the `HEXTORAW` function, and for `LONG RAW` and `BLOB` values of up to 16380 bytes.

Static Expressions

A **static expression** is an expression whose value can be determined at compile time—that is, it does not include character comparisons, variables, or function invocations. Static expressions are the only expressions that can appear in conditional compilation directives.

Definition of Static Expression

- An expression is static if it is the NULL literal.
- An expression is static if it is a character, numeric, or boolean literal.
- An expression is static if it is a reference to a static constant.
- An expression is static if it is a reference to a conditional compilation variable begun with $$.
- An expression is static if it is an operator is allowed in static expressions, if all of its operands are static, and if the operator does not raise an exception when it is evaluated on those operands.

Table 3-6 Operators Allowed in Static Expressions

Operators	Operators Category
()	Expression delimiter
**	exponentiation
*, /,+, -	Arithmetic operators for multiplication, division, addition or positive, subtraction or negative
=, !=, <, <=, >=, > IS [NOT] NULL	Comparison operators
NOT	Logical operator
[NOT] LIKE, [NOT] LIKE2, [NOT] LIKE4, [NOT] LIKEC	Pattern matching operators
XOR	Binary operator

This list shows functions allowed in static expressions.

- ABS
- ACOS
- ASCII
- ASCIISTR
- ASIN
- ATAN
- ATAN2
- BITAND

Copyright © 1996, 2025, Oracle and/or its affiliates.

- CEIL
- CHR
- COMPOSE
- CONVERT
- COS
- COSH
- DECOMPOSE
- EXP
- FLOOR
- HEXTORAW
- INSTR
- INSTRB
- INSTRC
- INSTR2
- INSTR4
- IS [NOT] INFINITE
- IS [NOT] NAN
- LENGTH
- LENGTH2
- LENGTH4
- LENGTHB
- LENGTHC
- LN
- LOG
- LOWER
- LPAD
- LTRIM
- MOD
- NVL
- POWER
- RAWTOHEX
- REM
- REMAINDER
- REPLACE
- ROUND
- RPAD
- RTRIM
- SIGN

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SIN
- SINH
- SQRT
- SUBSTR
- SUBSTR2
- SUBSTR4
- SUBSTRB
- SUBSTRC
- TAN
- TANH
- TO_BINARY_DOUBLE
- TO_BINARY_FLOAT
- TO_BOOLEAN
- TO_CHAR
- TO_NUMBER
- TRIM
- TRUNC
- UPPER

Static expressions can be used in the following subtype declarations:

- Length of string types (`VARCHAR2`, `NCHAR`, `CHAR`, `NVARCHAR2`, `RAW`, and the ANSI equivalents)
- Scale and precision of `NUMBER` types and subtypes such as `FLOAT`
- Interval type precision (year, month ,second)
- Time and Timestamp precision
- `VARRAY` bounds
- Bounds of ranges in type declarations

In each case, the resulting type of the static expression must be the same as the declared item subtype and must be in the correct range for the context.

Topics

- PLS_INTEGER Static Expressions
- BOOLEAN Static Expressions
- VARCHAR2 Static Expressions
- Static Constants

See Also

"Expressions" for general information about expressions

Copyright © 1996, 2025, Oracle and/or its affiliates.

PLS_INTEGER Static Expressions

`PLS_INTEGER` static expressions are:

- `PLS_INTEGER` literals

  For information about literals, see "Literals".
- `PLS_INTEGER` static constants

  For information about static constants, see "Static Constants".
- `NULL`

> **See Also**
>
> "PLS_INTEGER and BINARY_INTEGER Data Types" for information about the `PLS_INTEGER` data type

BOOLEAN Static Expressions

`BOOLEAN` static expressions are:

- `BOOLEAN` literals (`TRUE`, `FALSE`, or `NULL`)
- `BOOLEAN` static constants

  For information about static constants, see "Static Constants".
- Where *x* and *y* are `PLS_INTEGER` static expressions:
  - *x* > *y*
  - *x* < *y*
  - *x* >= *y*
  - *x* <= *y*
  - *x* = *y*
  - *x* <> *y*

  For information about `PLS_INTEGER` static expressions, see "PLS_INTEGER Static Expressions".
- Where *x* and *y* are `BOOLEAN` expressions:
  - `NOT` *y*
  - *x* `AND` *y*
  - *x* `OR` *y*
  - *x* > *y*
  - *x* >= *y*
  - *x* = *y*
  - *x* <= *y*
  - *x* <> *y*

Copyright © 1996, 2025, Oracle and/or its affiliates.

For information about BOOLEAN expressions, see "BOOLEAN Expressions".

- Where x is a static expression:
  - *x* IS NULL
  - *x* IS NOT NULL

  For information about static expressions, see "Static Expressions".

> **See Also**
>
> "BOOLEAN Data Type" for information about the BOOLEAN data type

VARCHAR2 Static Expressions

VARCHAR2 static expressions are:

- String literal with maximum size of 32,767 bytes

  For information about literals, see "Literals".
- NULL
- TO_CHAR(x), where x is a PLS_INTEGER static expression

  For information about the TO_CHAR function, see *Oracle Database SQL Language Reference*.
- TO_CHAR(x, f, n) where x is a PLS_INTEGER static expression and f and n are VARCHAR2 static expressions

  For information about the TO_CHAR function, see *Oracle Database SQL Language Reference*.
- x || y where x and y are VARCHAR2 or PLS_INTEGER static expressions

  For information about PLS_INTEGER static expressions, see "PLS_INTEGER Static Expressions".

> **See Also**
>
> "CHAR and VARCHAR2 Variables" for information about the VARCHAR2 data type

Static Constants

A **static constant** is declared in a package specification with this syntax:

```
constant_name CONSTANT data_type := static_expression;
```

The type of *static_expression* must be the same as *data_type* (either BOOLEAN or PLS_INTEGER).

The static constant must always be referenced as *package_name.constant_name*, even in the body of the *package_name* package.

If you use *constant_name* in the BOOLEAN expression in a conditional compilation directive in a PL/SQL unit, then the PL/SQL unit depends on the package *package_name*. If you alter the

Copyright © 1996, 2025, Oracle and/or its affiliates.

package specification, the dependent PL/SQL unit might become invalid and need recompilation (for information about the invalidation of dependent objects, see *Oracle Database Development Guide*).

If you use a package with static constants to control conditional compilation in multiple PL/SQL units, Oracle recommends that you create only the package specification, and dedicate it exclusively to controlling conditional compilation. This practice minimizes invalidations caused by altering the package specification.

To control conditional compilation in a single PL/SQL unit, you can set flags in the `PLSQL_CCFLAGS` compilation parameter. For information about this parameter, see "Assigning Values to Inquiry Directives" and *Oracle Database Reference*.

See Also

- "Declaring Constants" for general information about declaring constants
- PL/SQL Packages for more information about packages
- *Oracle Database Development Guide* for more information about schema object dependencies

Example 3-56 Static Constants

In this example, the package `my_debug` defines the static constants `debug` and `trace` to control debugging and tracing in multiple PL/SQL units. The procedure `my_proc1` uses only `debug`, and the procedure `my_proc2` uses only `trace`, but both procedures depend on the package. However, the recompiled code might not be different. For example, if you only change the value of `debug` to `FALSE` and then recompile the two procedures, the compiled code for `my_proc1` changes, but the compiled code for `my_proc2` does not.

```
CREATE PACKAGE my_debug IS
  debug CONSTANT BOOLEAN := TRUE;
  trace CONSTANT BOOLEAN := TRUE;
END my_debug;
/

CREATE PROCEDURE my_proc1 AUTHID DEFINER IS
BEGIN
  $IF my_debug.debug $THEN
    DBMS_OUTPUT.put_line('Debugging ON');
  $ELSE
    DBMS_OUTPUT.put_line('Debugging OFF');
  $END
END my_proc1;
/

CREATE PROCEDURE my_proc2 AUTHID DEFINER IS
BEGIN
  $IF my_debug.trace $THEN
    DBMS_OUTPUT.put_line('Tracing ON');
  $ELSE
    DBMS_OUTPUT.put_line('Tracing OFF');
  $END
END my_proc2;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Error-Reporting Functions

PL/SQL has two error-reporting functions, `SQLCODE` and `SQLERRM`, for use in PL/SQL exception-handling code.

For their descriptions, see "SQLCODE Function" and "SQLERRM Function".

You cannot use the `SQLCODE` and `SQLERRM` functions in SQL statements.

Conditional Compilation

Conditional compilation lets you customize the functionality of a PL/SQL application without removing source text.

For example, you can:

- Use new features with the latest database release and disable them when running the application in an older database release.
- Activate debugging or tracing statements in the development environment and hide them when running the application at a production site.

Topics

- How Conditional Compilation Works
- Conditional Compilation Examples
- Retrieving and Printing Post-Processed Source Text
- Conditional Compilation Directive Restrictions

How Conditional Compilation Works

Conditional compilation uses selection directives, which are similar to `IF` statements, to select source text for compilation.

The condition in a selection directive usually includes an inquiry directive. Error directives raise user-defined errors. All conditional compilation directives are built from preprocessor control tokens and PL/SQL text.

Topics

- Preprocessor Control Tokens
- Selection Directives
- Error Directives
- Inquiry Directives
- DBMS_DB_VERSION Package

> **See Also**
>
> "Static Expressions"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Preprocessor Control Tokens

A preprocessor control token identifies code that is processed before the PL/SQL unit is compiled.

Syntax

```
$plsql_identifier
```

There cannot be space between $ and *plsql_identifier*.

The character $ can also appear inside *plsql_identifier*, but it has no special meaning there.

These preprocessor control tokens are reserved:

- $IF
- $THEN
- $ELSE
- $ELSIF
- $ERROR

For information about *plsql_identifier*, see "Identifiers".

Selection Directives

A **selection directive** selects source text to compile.

Syntax

```
$IF boolean_static_expression $THEN
   text
[ $ELSIF boolean_static_expression $THEN
   text
]...
[ $ELSE
   text
$END
]
```

For the syntax of *boolean_static_expression*, see "BOOLEAN Static Expressions". The *text* can be anything, but typically, it is either a statement (see "*statement* ::=") or an error directive (explained in "Error Directives").

The selection directive evaluates the BOOLEAN static expressions in the order that they appear until either one expression has the value TRUE or the list of expressions is exhausted. If one expression has the value TRUE, its text is compiled, the remaining expressions are not evaluated, and their text is not analyzed. If no expression has the value TRUE, then if $ELSE is present, its text is compiled; otherwise, no text is compiled.

For examples of selection directives, see "Conditional Compilation Examples".

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> "Conditional Selection Statements" for information about the `IF` statement, which has the same logic as the selection directive

Error Directives

An **error directive** produces a user-defined error message during compilation.

Syntax

```
$ERROR varchar2_static_expression $END
```

It produces this compile-time error message, where *string* is the value of *varchar2_static_expression*:

```
PLS-00179: $ERROR: string
```

For the syntax of *varchar2_static_expression*, see "VARCHAR2 Static Expressions".

For an example of an error directive, see Example 3-60.

Inquiry Directives

An **inquiry directive** provides information about the compilation environment.

Syntax

```
$$name
```

For information about *name*, which is an unquoted PL/SQL identifier, see "Identifiers".

An inquiry directive typically appears in the *boolean_static_expression* of a selection directive, but it can appear anywhere that a variable or literal of its type can appear. Moreover, it can appear where regular PL/SQL allows only a literal (not a variable)—for example, to specify the size of a `VARCHAR2` variable.

Topics

- Predefined Inquiry Directives
- Assigning Values to Inquiry Directives
- Unresolvable Inquiry Directives

Predefined Inquiry Directives

The predefined inquiry directives are:

- `$$PLSQL_LINE`

  A `PLS_INTEGER` literal whose value is the number of the source line on which the directive appears in the current PL/SQL unit. An example of `$$PLSQL_LINE` in a selection directive is:

  ```
  $IF $$PLSQL_LINE = 32 $THEN ...
  ```

- `$$PLSQL_UNIT`

Copyright © 1996, 2025, Oracle and/or its affiliates.

A VARCHAR2 literal that contains the name of the current PL/SQL unit. If the current PL/SQL unit is an anonymous block, then $$PLSQL_UNIT contains a NULL value.

- $$PLSQL_UNIT_OWNER

  A VARCHAR2 literal that contains the name of the owner of the current PL/SQL unit. If the current PL/SQL unit is an anonymous block, then $$PLSQL_UNIT_OWNER contains a NULL value.

- $$PLSQL_UNIT_TYPE

  A VARCHAR2 literal that contains the type of the current PL/SQL unit—ANONYMOUS BLOCK, FUNCTION, PACKAGE, PACKAGE BODY, PROCEDURE, TRIGGER, TYPE, or TYPE BODY. Inside an anonymous block or non-DML trigger, $$PLSQL_UNIT_TYPE has the value ANONYMOUS BLOCK.

- $$*plsql_compilation_parameter*

  The name *plsql_compilation_parameter* is a PL/SQL compilation parameter (for example, PLSCOPE_SETTINGS). For descriptions of these parameters, see Table 2-2.

Because a selection directive needs a BOOLEAN static expression, you cannot use $$PLSQL_UNIT, $$PLSQL_UNIT_OWNER, or $$PLSQL_UNIT_TYPE in a VARCHAR2 comparison such as:

```
$IF $$PLSQL_UNIT = 'AWARD_BONUS' $THEN ...
$IF $$PLSQL_UNIT_OWNER IS HR $THEN ...
$IF $$PLSQL_UNIT_TYPE IS FUNCTION $THEN ...
```

However, you can compare the preceding directives to NULL. For example:

```
$IF $$PLSQL_UNIT IS NULL $THEN ...
$IF $$PLSQL_UNIT_OWNER IS NOT NULL $THEN ...
$IF $$PLSQL_UNIT_TYPE IS NULL $THEN ...
```

Example 3-57 Predefined Inquiry Directives

In this example, a SQL*Plus script, uses several predefined inquiry directives as PLS_INTEGER and VARCHAR2 literals to show how their values are assigned.

```
SQL> CREATE OR REPLACE PROCEDURE p
  2  AUTHID DEFINER IS
  3    i PLS_INTEGER;
  4  BEGIN
  5    DBMS_OUTPUT.PUT_LINE('Inside p');
  6    i := $$PLSQL_LINE;
  7    DBMS_OUTPUT.PUT_LINE('i = ' || i);
  8    DBMS_OUTPUT.PUT_LINE('$$PLSQL_LINE = ' || $$PLSQL_LINE);
  9    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT = ' || $$PLSQL_UNIT);
 10    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT_OWNER = ' || $$PLSQL_UNIT_OWNER);
 11    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT_TYPE = ' || $$PLSQL_UNIT_TYPE);
 12  END;
 13  /

Procedure created.

SQL> BEGIN
  2    p;
  3    DBMS_OUTPUT.PUT_LINE('Outside p');
  4    DBMS_OUTPUT.PUT_LINE('$$PLSQL_LINE = ' || $$PLSQL_LINE);
  5    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT = ' || $$PLSQL_UNIT);
  6    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT_OWNER = ' || $$PLSQL_UNIT_OWNER);
  7    DBMS_OUTPUT.PUT_LINE('$$PLSQL_UNIT_TYPE = ' || $$PLSQL_UNIT_TYPE);
  8  END;
  9  /
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Inside p
i = 6
$$PLSQL_LINE = 8
$$PLSQL_UNIT = P
$$PLSQL_UNIT_OWNER = HR
$$PLSQL_UNIT_TYPE = PROCEDURE
Outside p
$$PLSQL_LINE = 4
$$PLSQL_UNIT =
$$PLSQL_UNIT_OWNER =
$$PLSQL_UNIT_TYPE = ANONYMOUS BLOCK

PL/SQL procedure successfully completed.
```

Example 3-58 Displaying Values of PL/SQL Compilation Parameters

This example displays the current values of PL/SQL the compilation parameters.

> **Note**
>
> In the SQL*Plus environment, you can display the current values of initialization parameters, including the PL/SQL compilation parameters, with the command `SHOW PARAMETERS`. For more information about the `SHOW` command and its `PARAMETERS` option, see *SQL*Plus User's Guide and Reference*.

```
BEGIN
  DBMS_OUTPUT.PUT_LINE('$$PLSCOPE_SETTINGS = '     || $$PLSCOPE_SETTINGS);
  DBMS_OUTPUT.PUT_LINE('$$PLSQL_CCFLAGS = '        || $$PLSQL_CCFLAGS);
  DBMS_OUTPUT.PUT_LINE('$$PLSQL_CODE_TYPE = '      || $$PLSQL_CODE_TYPE);
  DBMS_OUTPUT.PUT_LINE('$$PLSQL_OPTIMIZE_LEVEL = ' || $$PLSQL_OPTIMIZE_LEVEL);
  DBMS_OUTPUT.PUT_LINE('$$PLSQL_WARNINGS = '       || $$PLSQL_WARNINGS);
  DBMS_OUTPUT.PUT_LINE('$$NLS_LENGTH_SEMANTICS = ' || $$NLS_LENGTH_SEMANTICS);
END;
/
```

Result:

```
$$PLSCOPE_SETTINGS = IDENTIFIERS:NONE
$$PLSQL_CCFLAGS =
$$PLSQL_CODE_TYPE = INTERPRETED
$$PLSQL_OPTIMIZE_LEVEL = 2
$$PLSQL_WARNINGS = ENABLE:ALL
$$NLS_LENGTH_SEMANTICS = BYTE
```

Assigning Values to Inquiry Directives

You can assign values to inquiry directives with the `PLSQL_CCFLAGS` compilation parameter.

For example:

```
ALTER SESSION SET PLSQL_CCFLAGS =
  'name1:value1, name2:value2, ... namen:valuen'
```

Each *value* must be either a `BOOLEAN` literal (`TRUE`, `FALSE`, or `NULL`) or `PLS_INTEGER` literal. The data type of *value* determines the data type of *name*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The same *name* can appear multiple times, with values of the same or different data types. Later assignments override earlier assignments. For example, this command sets the value of `$$flag` to 5 and its data type to `PLS_INTEGER`:

```
ALTER SESSION SET PLSQL_CCFLAGS = 'flag:TRUE, flag:5'
```

Oracle recommends against using `PLSQL_CCFLAGS` to assign values to predefined inquiry directives, including compilation parameters. To assign values to compilation parameters, Oracle recommends using the `ALTER SESSION` statement.

For more information about the `ALTER SESSION` statement, see *Oracle Database SQL Language Reference*.

> **Note**
>
> The compile-time value of `PLSQL_CCFLAGS` is stored with the metadata of stored PL/SQL units, which means that you can reuse the value when you explicitly recompile the units. For more information, see "PL/SQL Units and Compilation Parameters".

For more information about `PLSQL_CCFLAGS`, see *Oracle Database Reference*.

Example 3-59 PLSQL_CCFLAGS Assigns Value to Itself

This example uses `PLSQL_CCFLAGS` to assign a value to the user-defined inquiry directive `$$Some_Flag` and (though not recommended) to itself. Because later assignments override earlier assignments, the resulting value of `$$Some_Flag` is 2 and the resulting value of `PLSQL_CCFLAGS` is the value that it assigns to itself (99), not the value that the `ALTER SESSION` statement assigns to it (`'Some_Flag:1, Some_Flag:2, PLSQL_CCFlags:99'`).

```
ALTER SESSION SET
PLSQL_CCFlags = 'Some_Flag:1, Some_Flag:2, PLSQL_CCFlags:99'
/
BEGIN
  DBMS_OUTPUT.PUT_LINE($$Some_Flag);
  DBMS_OUTPUT.PUT_LINE($$PLSQL_CCFlags);
END;
/
```

Result:

```
2
99
```

Unresolvable Inquiry Directives

If the source text is not wrapped, PL/SQL issues a warning if the value of an inquiry directive cannot be determined.

If an inquiry directive ($$*name*) cannot be resolved, and the source text is not wrapped, then PL/SQL issues the warning `PLW-6003` and substitutes `NULL` for the value of the unresolved inquiry directive. If the source text is wrapped, the warning message is disabled, so that the unresolved inquiry directive is not revealed.

For information about wrapping PL/SQL source text, see PL/SQL Source Text Wrapping.

Copyright © 1996, 2025, Oracle and/or its affiliates.

DBMS_DB_VERSION Package

The DBMS_DB_VERSION package specifies the Oracle version numbers and other information useful for simple conditional compilation selections based on Oracle versions.

The DBMS_DB_VERSION package provides these static constants:

- The PLS_INTEGER constant VERSION identifies the current Oracle Database version.
- The PLS_INTEGER constant RELEASE identifies the current Oracle Database release number.
- Each BOOLEAN constant of the form VER_LE_*v* has the value TRUE if the database version is less than or equal to *v*; otherwise, it has the value FALSE.
- Each BOOLEAN constant of the form VER_LE_*v*_*r* has the value TRUE if the database version is less than or equal to *v* and release is less than or equal to *r*; otherwise, it has the value FALSE.

For more information about the DBMS_DB_VERSION package, see *Oracle Database PL/SQL Packages and Types Reference*.

Conditional Compilation Examples

Examples of conditional compilation using selection and user-defined inquiry directives.

Example 3-60 Code for Checking Database Version

This example generates an error message if the database version and release is less than Oracle Database 10g release 2; otherwise, it displays a message saying that the version and release are supported and uses a COMMIT statement that became available at Oracle Database 10g release 2.

```
BEGIN
  $IF DBMS_DB_VERSION.VER_LE_10_1 $THEN  -- selection directive begins
    $ERROR 'unsupported database release' $END  -- error directive
  $ELSE
    DBMS_OUTPUT.PUT_LINE (
      'Release ' || DBMS_DB_VERSION.VERSION || '.' ||
      DBMS_DB_VERSION.RELEASE || ' is supported.'
    );
  -- This COMMIT syntax is newly supported in 10.2:
  COMMIT WRITE IMMEDIATE NOWAIT;
  $END  -- selection directive ends
END;
/
```

Result:

```
Release 12.1 is supported.
```

Example 3-61 Compiling Different Code for Different Database Versions

This example sets the values of the user-defined inquiry directives $$my_debug and $$my_tracing and then uses conditional compilation:

- In the specification of package my_pkg, to determine the base type of the subtype my_real (BINARY_DOUBLE is available only for Oracle Database versions 10g and later.)
- In the body of package my_pkg, to compute the values of my_pi and my_e differently for different database versions

Copyright © 1996, 2025, Oracle and/or its affiliates.

- In the procedure `circle_area`, to compile some code only if the inquiry directive `$$my_debug` has the value `TRUE`.

```
ALTER SESSION SET PLSQL_CCFLAGS = 'my_debug:FALSE, my_tracing:FALSE';

CREATE OR REPLACE PACKAGE my_pkg AUTHID DEFINER AS
  SUBTYPE my_real IS
    $IF DBMS_DB_VERSION.VERSION < 10 $THEN
      NUMBER;
    $ELSE
      BINARY_DOUBLE;
    $END

  my_pi my_real;
  my_e  my_real;
END my_pkg;
/

CREATE OR REPLACE PACKAGE BODY my_pkg AS
BEGIN
  $IF DBMS_DB_VERSION.VERSION < 10 $THEN
    my_pi := 3.14159265358979323846264338327950288420;
    my_e  := 2.71828182845904523536028747135266249775;
  $ELSE
    my_pi := 3.14159265358979323846264338327950288420d;
    my_e  := 2.71828182845904523536028747135266249775d;
  $END
END my_pkg;
/

CREATE OR REPLACE PROCEDURE circle_area(radius my_pkg.my_real) AUTHID DEFINER IS
  my_area       my_pkg.my_real;
  my_data_type  VARCHAR2(30);
BEGIN
  my_area := my_pkg.my_pi * (radius**2);

  DBMS_OUTPUT.PUT_LINE
    ('Radius: ' || TO_CHAR(radius) || ' Area: ' || TO_CHAR(my_area));

  $IF $$my_debug $THEN
    SELECT DATA_TYPE INTO my_data_type
    FROM USER_ARGUMENTS
    WHERE OBJECT_NAME = 'CIRCLE_AREA'
    AND ARGUMENT_NAME = 'RADIUS';

    DBMS_OUTPUT.PUT_LINE
      ('Data type of the RADIUS argument is: ' || my_data_type);
  $END
END;
/

CALL DBMS_PREPROCESSOR.PRINT_POST_PROCESSED_SOURCE
 ('PACKAGE', 'HR', 'MY_PKG');
```

Result:

```
PACKAGE my_pkg AUTHID DEFINER AS
SUBTYPE my_real IS
BINARY_DOUBLE;
my_pi my_real;
my_e my_real;
END my_pkg;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Call completed.
```

Retrieving and Printing Post-Processed Source Text

The `DBMS_PREPROCESSOR` package provides subprograms that retrieve and print the source text of a PL/SQL unit in its post-processed form.

For information about the `DBMS_PREPROCESSOR` package, see *Oracle Database PL/SQL Packages and Types Reference*.

Example 3-62 Displaying Post-Processed Source Textsource text

This example invokes the procedure `DBMS_PREPROCESSOR.PRINT_POST_PROCESSED_SOURCE` to print the post-processed form of `my_pkg` (from "Example 3-61"). Lines of code in "Example 3-61" that are not included in the post-processed text appear as blank lines.

```
CALL DBMS_PREPROCESSOR.PRINT_POST_PROCESSED_SOURCE (
  'PACKAGE', 'HR', 'MY_PKG'
);
```

Result:

```
PACKAGE my_pkg AUTHID DEFINERs AS
SUBTYPE my_real IS
BINARY_DOUBLE;
my_pi my_real;
my_e my_real;
END my_pkg;
```

Conditional Compilation Directive Restrictions

Conditional compilation directives are subject to these semantic restrictions.

A conditional compilation directive cannot appear in the specification of a schema-level user-defined type (created with the "CREATE TYPE Statement"). This type specification specifies the attribute structure of the type, which determines the attribute structure of dependent types and the column structure of dependent tables.

> **⚠ Caution**
>
> Using a conditional compilation directive to change the attribute structure of a type can cause dependent objects to "go out of sync" or dependent tables to become inaccessible. Oracle recommends that you change the attribute structure of a type only with the "ALTER TYPE Statement". The `ALTER TYPE` statement propagates changes to dependent objects.

If a conditional compilation directive is used in a schema-level type specification, the compiler raises the error `PLS-00180: preprocessor directives are not supported in this context.`

As all conditional compiler constructs are processed by the PL/SQL preprocessor, the SQL Parser imposes the following restrictions on the location of the first conditional compilation directive in a stored PL/SQL unit or anonymous block:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- In a package specification, a package body, a type body, a schema-level function and in a schema-level procedure, at least one nonwhitespace PL/SQL token must appear after the identifier of the unit name before a conditional compilation directive is valid.

  > **Note**
  >
  > – The PL/SQL comments, "--" or "/*", are counted as whitespace tokens.
  >
  > – If the token is invalid in PL/SQL, then a PLS-00103 error is issued. But if a conditional compilation directive is used in violation of this rule, then an ORA error is produced.

  Example 3-63 and Example 3-64, show that the first conditional compilation directive appears after the first PL/SQL token that follows the identifier of the unit being defined.

- In a trigger or an anonymous block, the first conditional compilation directive cannot appear before the keyword `DECLARE` or `BEGIN`, whichever comes first.

The SQL parser also imposes this restriction: If an anonymous block uses a placeholder, the placeholder cannot appear in a conditional compilation directive. For example:

```
BEGIN
  :n := 1; -- valid use of placeholder
  $IF ... $THEN
    :n := 1; -- invalid use of placeholder
$END
```

Example 3-63 Using Conditional Compilation Directive in the Definition of a Package Specification

This example shows the placement of the first conditional compilation directive after an `AUTHID` clause, but before the keyword `IS`, in the definition of the package specification.

```
CREATE OR REPLACE PACKAGE cc_pkg
AUTHID DEFINER
$IF $$XFLAG $THEN ACCESSIBLE BY(p1_pkg) $END
IS
    i NUMBER := 10;
    trace CONSTANT BOOLEAN := TRUE;
END cc_pkg;
```

Result:

```
Package created.
```

Example 3-64 Using Conditional Compilation Directive in the Formal Parameter List of a Subprogram

This example shows the placement of the first conditional compilation directive after the left parenthesis, in the formal parameter list of a PL/SQL procedure definition.

```
CREATE OR REPLACE PROCEDURE my_proc (
  $IF $$xxx $THEN i IN PLS_INTEGER $ELSE i IN INTEGER $END
) IS
BEGIN
      NULL;
END my_proc;
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Procedure created.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

4

PL/SQL Data Types

Every PL/SQL constant, variable, parameter, and function return value has a **data type** that determines its storage format and its valid values and operations.

This chapter explains **scalar data types**, which store values with no internal components.

A scalar data type can have subtypes. A **subtype** is a data type that is a subset of another data type, which is its **base type**. A subtype has the same valid operations as its base type. A data type and its subtypes comprise a **data type family**.

PL/SQL predefines many types and subtypes in the package `STANDARD` and lets you define your own subtypes.

The PL/SQL scalar data types are:

- The SQL data types
- `PLS_INTEGER`
- `BINARY_INTEGER`
- `REF CURSOR`
- User-defined subtypes

Topics

- SQL Data Types
- PLS_INTEGER and BINARY_INTEGER Data Types
- SIMPLE_INTEGER Subtype of PLS_INTEGER
- User-Defined PL/SQL Subtypes

See Also

- "PL/SQL Collections and Records" for information about **composite data types**
- "Cursor Variables" for information about `REF CURSOR`
- "CREATE TYPE Statement" for information about creating schema-level user-defined data types
- "PL/SQL Predefined Data Types" for the predefined PL/SQL data types and subtypes, grouped by data type family

SQL Data Types

The PL/SQL data types include the SQL data types.

For information about the SQL data types, see *Oracle Database SQL Language Reference*—all information there about data types and subtypes, data type comparison rules, data

Copyright © 1996, 2025, Oracle and/or its affiliates.

conversion, literals, and format models applies to both SQL and PL/SQL, except as noted here:

- Different Maximum Sizes
- Additional PL/SQL Constants for BINARY_FLOAT and BINARY_DOUBLE
- Additional PL/SQL Subtypes of BINARY_FLOAT and BINARY_DOUBLE

Unlike SQL, PL/SQL lets you declare variables, to which the following topics apply:

- BOOLEAN Data Type
- JSON Data Type
- VECTOR Data Type
- CHAR and VARCHAR2 Variables
- LONG and LONG RAW Variables
- ROWID and UROWID Variables

Different Maximum Sizes

The SQL data types listed in Table 4-1 have different maximum sizes in PL/SQL and SQL.

Table 4-1 Data Types with Different Maximum Sizes in PL/SQL and SQL

Data Type	Maximum Size in PL/SQL	Maximum Size in SQL
`CHAR`[1]	32,767 bytes	2,000 bytes
`NCHAR`[1]	32,767 bytes	2,000 bytes
`RAW`[1]	32,767 bytes	2,000 bytes[2]
`VARCHAR2`[1]	32,767 bytes	4,000 bytes[2]
`NVARCHAR2`[1]	32,767 bytes	4,000 bytes[2]
`LONG`[3]	32,760 bytes	2 gigabytes (GB) - 1
`LONG RAW`[3]	32,760 bytes	2 GB
`BLOB`	128 terabytes (TB)	(4 GB - 1) * *`database_block_size`*
`CLOB`	128 TB	(4 GB - 1) * *`database_block_size`*
`NCLOB`	128 TB	(4 GB - 1) * *`database_block_size`*

1 When specifying the maximum size of a value of this data type in PL/SQL, use an integer literal (not a constant or variable) whose value is in the range from 1 through 32,767.
2 To eliminate this size difference, follow the instructions in *Oracle Database SQL Language Reference*.
3 Supported only for backward compatibility with existing applications.

Additional PL/SQL Constants for BINARY_FLOAT and BINARY_DOUBLE

The SQL data types `BINARY_FLOAT` and `BINARY_DOUBLE` represent single-precision and double-precision IEEE 754-format floating-point numbers, respectively.

`BINARY_FLOAT` and `BINARY_DOUBLE` computations do not raise exceptions, so you must check the values that they produce for conditions such as overflow and underflow by comparing them to predefined constants (for examples, see *Oracle Database SQL Language Reference*). PL/SQL has more of these constants than SQL does.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 4-2 lists and describes the predefined PL/SQL constants for BINARY_FLOAT and BINARY_DOUBLE, and identifies those that SQL also defines.

Table 4-2 Predefined PL/SQL BINARY_FLOAT and BINARY_DOUBLE Constants

Constant	Description
BINARY_FLOAT_NAN (*)	BINARY_FLOAT value for which the condition IS NAN (not a number) is true
BINARY_FLOAT_INFINITY (*)	Single-precision positive infinity
BINARY_FLOAT_MAX_NORMAL	Maximum normal BINARY_FLOAT value
BINARY_FLOAT_MIN_NORMAL	Minimum normal BINARY_FLOAT value
BINARY_FLOAT_MAX_SUBNORMAL	Maximum subnormal BINARY_FLOAT value
BINARY_FLOAT_MIN_SUBNORMAL	Minimum subnormal BINARY_FLOAT value
BINARY_DOUBLE_NAN (*)	BINARY_DOUBLE value for which the condition IS NAN (not a number) is true
BINARY_DOUBLE_INFINITY (*)	Double-precision positive infinity
BINARY_DOUBLE_MAX_NORMAL	Maximum normal BINARY_DOUBLE value
BINARY_DOUBLE_MIN_NORMAL	Minimum normal BINARY_DOUBLE value
BINARY_DOUBLE_MAX_SUBNORMAL	Maximum subnormal BINARY_DOUBLE value
BINARY_DOUBLE_MIN_SUBNORMAL	Minimum subnormal BINARY_DOUBLE value

(*) SQL also predefines this constant.

Additional PL/SQL Subtypes of BINARY_FLOAT and BINARY_DOUBLE

PL/SQL predefines these subtypes:

- SIMPLE_FLOAT, a subtype of SQL data type BINARY_FLOAT
- SIMPLE_DOUBLE, a subtype of SQL data type BINARY_DOUBLE

Each subtype has the same range as its base type and has a NOT NULL constraint (explained in "NOT NULL Constraint").

If you know that a variable will never have the value NULL, declare it as SIMPLE_FLOAT or SIMPLE_DOUBLE, rather than BINARY_FLOAT or BINARY_DOUBLE. Without the overhead of checking for nullness, the subtypes provide significantly better performance than their base types. The performance improvement is greater with PLSQL_CODE_TYPE='NATIVE' than with PLSQL_CODE_TYPE='INTERPRETED' (for more information, see "Use Data Types that Use Hardware Arithmetic").

BOOLEAN Data Type

The data type BOOLEAN stores **logical values**, which are the boolean values TRUE and FALSE and the value NULL. NULL represents an unknown value.

The syntax for declaring a BOOLEAN variable is:

```
variable_name BOOLEAN
```

By default, you cannot pass a BOOLEAN value to any NUMBER or VARCHAR2 parameters for any procedures or functions, such as the DBMS_OUTPUT.PUT or DBMS_OUTPUT.PUT_LINE subprograms.

Copyright © 1996, 2025, Oracle and/or its affiliates.

In order to pass a BOOLEAN value to these procedures, set the initialization parameter PLSQL_IMPLICIT_CONVERSION_BOOL to TRUE. Setting the parameter to TRUE also allows implicit conversions in the assignment of variables, for example, if you want to assign a NUMBER or VARCHAR2 value to a BOOLEAN variable. Additionally, a TRUE value makes it possible to use string literals in the assignment of BOOLEAN variables. The parameter has no effect on explicit conversions such as CAST or the functions TO_NUMBER, TO_CHAR, or TO_BOOLEAN.

If a subprogram is overloaded with BOOLEAN and numeric or character types, setting PLSQL_IMPLICIT_CONVERSION_BOOL to TRUE can cause compile-time errors. For more information about potential overload errors with the use of this parameter, see "Subprogram Overload Errors".

The PLSQL_IMPLICIT_CONVERSION_BOOL parameter is persistable, meaning any PL/SQL unit created with the parameter set uses the value specified at the time of unit creation when the unit is compiled with the REUSE SETTINGS clause.

It is also possible to assign a BOOLEAN expression to a BOOLEAN variable (regardless of the PLSQL_IMPLICIT_CONVERSION_BOOL parameter's value). For details about BOOLEAN expressions, see "BOOLEAN Expressions".

See Also

- *Oracle AI Database Reference* for more information about the PLSQL_IMPLICIT_CONVERSION_BOOL parameter
- *Oracle AI Database SQL Language Reference* for information about the SQL BOOLEAN data type and for a list of available string literals used to represent TRUE and FALSE

Example 4-1 Printing BOOLEAN Values

In this example, BOOLEAN values are printed by passing the values directly to the procedure DBMS_OUTPUT.PUT_LINE. Executing this code successfully depends on the initialization parameter PLSQL_IMPLICIT_CONVERSION_BOOL being set to TRUE.

```
DECLARE
  t_b boolean := TRUE;
  f_b boolean := FALSE;
BEGIN
  DBMS_OUTPUT.PUT_LINE('My bool is: ' || t_b);
  DBMS_OUTPUT.PUT_LINE('My bool is: ' || f_b);
END;
```

Result:

```
My bool is: TRUE
My bool is: FALSE
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

JSON Data Type

You can use `JSON` data type instances with PL/SQL subprograms. The PL/SQL `JSON` data type is stored in the database in a binary form for faster access to nested `JSON` values.

You can use JSON data type and its instances in most places where a SQL data type is allowed, including:

- As the column type for table or view DDL.
- As a parameter type for a PL/SQL subprogram.
- As an element or field type in records, PL/SQL collections, and `%ROWTYPE` attributes.
- In expressions wherever a SQL/JSON function or condition is allowed.

The JSON data type is not currently supported in SQL collections or objects.

Topics

- PL/SQL and JSON Type Conversions

See Also

- json-schema.org for information about JSON Schema
- *Oracle AI Database JSON Developer's Guide* for details about using PL/SQL with JSON data
- *Oracle Database JSON Developer's Guide* for more information about PL/SQL object types for JSON

PL/SQL and JSON Type Conversions

The built-in function `json_value` supports scalar data type mappings as well as mappings from JSON objects to user-defined PL/SQL types. Given an instance of a user-defined PL/SQL or SQL aggregate type, the PL/SQL JSON constructor returns a corresponding JSON object or JSON array type instance.

The use of PL/SQL user-defined subtypes as the returning aggregate data type is supported by `json_value`. This includes support for any constraints or initializers employed by subtypes used as field or element data types in a returning aggregate data type.

All PL/SQL record field and collection data element data type constraints are honored by PL/SQL `json_value`. Constraints include character max length, number scale and precision, time/time stamp/interval constraints, integer range checks, and not null constraints.

These types can be declared in any program scope visible to the `json_value` call site, including top-level SQL (for SQL objects and collections), package level PL/SQL, or locally in a PL/SQL function, procedure, or anonymous call block.

PL/SQL specific user-defined aggregate types include:

- Records
- `INDEX BY PLS_INTEGER` collections
- Associative arrays

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Nested tables
- Varrays
- Objects

PL/SQL aggregate types can be used as the `IN` and `RETURN` data types of PL/SQL built-in functions. All PL/SQL `%ROWTYPE`s are supported in the `RETURNING` clause of `json_value`.

The `ON MISMATCH` clause can be used with `json_value` to handle type matching exceptions. It is used to specify the desired behavior when a targeted JSON value cannot be converted to the specified return type. Note that PL/SQL records, index by `PLS_INTEGER` collections, and index by `VARCHAR2` collections cannot be atomically null. Therefore, the `NULL ON MISMATCH` clause raises a compile time error when one of these types is specified as the return type. For more information about the `ON MISMATCH` clause, see *Oracle AI Database JSON Developer's Guide*.

Type Name Resolution and Scoping

A type name used in `json_value` is resolved using standard PL/SQL name resolution rules. PL/SQL begins looking for a name in the inner-most scope of the PL/SQL code where the name is referenced and expands the search to the outer scopes until the name is resolved.

The PL/SQL built-in function `json_value` resolves up to three part names, which include the following formats:

- `<schema name>.<package name>.<type name>`
- `<package name>.<type name>`
- `<schema name>.<type name>`
- `<type name>`

Note that this differs from the SQL `json_value` built-in function, which only resolves one or two part type names.

Synonyms may be used where appropriate in the full type name string and those synonyms are resolved during type name resolution.

Topics

- JSON Objects and PL/SQL Records
- JSON Objects and Index by PLS_INTEGER and Nested Table Collections
- JSON Arrays and Nested Tables, Index by PLS_INTEGER, and Varray Collections
- JSON Objects and Associative Arrays

> **See Also**
>
> - *Oracle Database JSON Developer's Guide* for more information about the `json_value` built-in function

Copyright © 1996, 2025, Oracle and/or its affiliates.

JSON Objects and PL/SQL Records

PL/SQL records hold data using name/value pairs and can be mapped to and from JSON objects via the JSON constructor and the built-in function `json_value`, respectively.

Topics

- JSON Objects to PL/SQL Records
- PL/SQL Records to JSON Objects

JSON Objects to PL/SQL Records

When a PL/SQL record name is specified in the `RETURNING` clause, `json_value` maps the input JSON object to the PL/SQL record and returns an instance of the PL/SQL record. If the input JSON is not a JSON object, the `ON MISMATCH` clause applies.

To accomplish the mapping, each JSON key name must map to a unique attribute in the PL/SQL record using a default case-insensitive comparison that disregards any double quotes surrounding the name, as well as the placement of the key or attribute name in either of the types being mapped.

Case sensitive mapping is supported using the case-sensitive mapping syntax, as shown below:

```
DECLARE
    TYPE personrecord IS RECORD(first VARCHAR2(10), last VARCHAR2(10));
    p personrecord;
BEGIN
    p := JSON_VALUE(JSON('{"FIRST":"Jane", "LAST":"Cooper"}'), '$'
    RETURNING personrecord USING CASE_SENSITIVE MAPPING);
    DBMS_OUTPUT.PUT_LINE(p.first ||' '|| p.last);
END;
/
```

Once the key name is mapped, the JSON value for the key name is copied into the PL/SQL record attribute. The JSON value must be convertible to the PL/SQL data type of the mapped field. If the value types are not convertible, a `MISMATCH` error is raised.

Record types that contain JSON fields are supported in calls to `json_value`, with the JSON fields mapped to any JSON type, including JSON objects and JSON arrays. In other words, if a JSON attribute name is mapped to a record field name and the record field is a JSON type, PL/SQL copies the JSON value of the JSON attribute into the record field JSON type.

The JSON value must be valid JSON. If the JSON document is textual, the JSON value is parsed when it is copied into the JSON field to verify that it is valid JSON. Once the copy is complete, no further recursive mapping takes place for the attribute.

Example 4-2 Convert a JSON Object to PL/SQL Records

This example demonstrates how the same JSON object can be mapped to two different PL/SQL records.

```
DECLARE
    TYPE theRec1 IS RECORD (field1 NUMBER, field2 VARCHAR2(10));
    TYPE theRec2 IS RECORD ("fIeLd2" VARCHAR2(20), "FieLD1" NUMBER);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    Rec1 theRec1;
    Rec2 theRec2;
BEGIN
    Rec1 := JSON_VALUE(JSON('{"FIELD1":10, "field2":"hello"}'), '$' RETURNING
theRec1);
    Rec2 := JSON_VALUE(JSON('{"FIELD1":10, "field2":"hello"}'), '$' RETURNING
theRec2);
END;
/
```

Running the PL/SQL block results in `Rec1` and `Rec2` containing the following values, respectively:

```
theRec1(field1=>10, field2=>'hello')
theRec2("fIeLd2"=>'hello', "FieLD1"=>10)
```

PL/SQL Records to JSON Objects

SQL objects and PL/SQL record type instances, including implicit records created by the `<table | view | cursor>%ROWTYPE` attribute, are allowed as valid inputs to the JSON constructor.

The PL/SQL object attribute name becomes the JSON key name. Double quoted attribute names become case sensitive JSON key names while non-double quoted attribute names become uppercase JSON key names. In PL/SQL object attribute values are mapped to the closest JSON value type.

Example 4-3 Convert a PL/SQL Record to a JSON Object

```
DECLARE
    TYPE theRec IS RECORD(field1 NUMBER, "Field2" NUMBER);
    myRec theRec := theRec(10, 20);
    myJson JSON;
BEGIN
    myJson := JSON(myRec);
    DBMS_OUTPUT.PUT_LINE(JSON_SERIALIZE(myJson));
END;
/
```

Result:

```
{"FIELD1":10, "Field2":20}
```

JSON Objects and Index by PLS_INTEGER and Nested Table Collections

Index by `PLS_INTEGER` collections and nested table collections can be converted to and from JSON objects using the built-in `json_value` function and the JSON constructor, respectively.

Topics

- JSON Objects to Index by PLS_INTEGER and Nested Table Collections
- Index by PLS_INTEGER Collections and Nested Types to JSON Objects

Copyright © 1996, 2025, Oracle and/or its affiliates.

JSON Objects to Index by PLS_INTEGER and Nested Table Collections

Index by `PLS_INTEGER` and nested table collections can both be sparse collection types that depend on integer indexed elements. These types map to JSON objects, where the string key attribute of the object is a string representation of the collection's integer index.

When converting from a JSON object to either collection type, an error is raised if the JSON object string key attribute does not cleanly convert into an integer value. With nested table collections, the key attribute must be a positive integer, otherwise an error is raised. Additionally, the maximum key value cannot exceed the number of elements in the JSON object. If a larger key value is required, an index by `PLS_INTEGER` collection can be used.

If there are any gaps between index values in the object, those gaps are recreated in both collection types. That is, if elements are missing between the lowest and highest number index in the JSON object, those elements will also be missing in the collection. Keep in mind that missing elements are not the same as `NULL` elements.

The JSON object index key attributes do not need to be in sorted order. They are sorted when they are inserted into the collection.

Example 4-4 Convert a JSON Object to an Index by PLS_INTEGER Collection

This example demonstrates the conversion of a JSON object to an Index by `PLS_INTEGER` collection using the built-in function `json_value`.

```
DECLARE
    TYPE theIBPLS IS TABLE OF NUMBER INDEX BY BINARY_INTEGER;
    myIBPLS theIBPLS;
BEGIN
    myIBPLS := JSON_VALUE(JSON('{"-10":10, "-1":1, "100":-100}'), '$'
RETURNING theIBPLS);
END;
/
```

Running the PL/SQL block results in the creation of an Index by `PLS_INTEGER` collection with the following element values:

```
theIBPLS(-10=>10, -1=>1, 100=>-100)
```

Example 4-5 Convert a JSON Object to a Nested Table Collection

This example demonstrates the conversion of a JSON object to a nested table collection using the built-in function `json_value`.

```
DECLARE
    TYPE theNSTTAB IS TABLE OF NUMBER;
    myNSTTAB theNSTTAB;
BEGIN
    myNSTTAB := JSON_VALUE(JSON('{"1":10, "2":20, "3":30, "4":40}'), '$'
RETURNING theNSTTAB);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Running the PL/SQL block results in the creation of a nested table collection with the following values:

```
theNSTTAB(1=>10, 2=>20, 3=>30, 4=>40)
```

Index by PLS_INTEGER Collections and Nested Types to JSON Objects

Index by `PLS_INTEGER` collections are converted to a JSON object with index values preserved when passed to a JSON constructor. When represented as a JSON object, the collection's index appears as a JSON string representation of the index integer value.

In order to preserve sparseness on a round trip from PL/SQL to JSON and back to PL/SQL, a nested table collection is converted to a JSON object when it is passed to a JSON constructor. When represented as a JSON object, nested table indices appear as a JSON string representation of the index integer value.

Example 4-6 Convert an Index by PLS_INTEGER Collection to a JSON Object

This example demonstrates the conversion of an index by `PLS_INTEGER` collection to a JSON object using the JSON constructor.

```
DECLARE
    TYPE theIBPLS IS TABLE OF NUMBER INDEX BY PLS_INTEGER;
    myIBPLS theIBPLS := theIBPLS(-1=>1, 2=>2, -3=>3);
    myJSON JSON;
BEGIN
    myJSON := JSON(myIBPLS);
    DBMS_OUTPUT.PUT_LINE(JSON_SERIALIZE(myJSON));
END;
/
```

Result:

```
{ "-3":3, "-1":1, "2":2 }
```

Example 4-7 Convert a Nested Table to a JSON Object

This example demonstrates the conversion of a sparse nested table into a JSON object using the JSON constructor.

```
DECLARE
    TYPE theNSTTAB IS TABLE OF NUMBER;
    myNSTTAB theNSTTAB := theNSTTAB(1=>1, 2=>2, 3=>3);
    myJSON JSON;
BEGIN
    myNSTTAB.delete(2); --myNSTTAB becomes sparse when elements are deleted
    myJSON := JSON(myNSTTAB);
    DBMS_OUTPUT.PUT_LINE(JSON_SERIALIZE(myJSON));
END;
/
```

Result:

```
{ "1":1, "3":3 }
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

JSON Arrays and Nested Tables, Index by PLS_INTEGER, and Varray Collections

JSON arrays are converted to nested tables, Index by `PLS_INTEGER`, or Varray collections using the built-in `json_value` function. Varrays are converted to JSON arrays when passed through the JSON constructor while Index by `PLS_INTEGER` collections and nested tables are converted to JSON objects.

Topics

- JSON Arrays to Nested Tables, Index by PLS_INTEGER, and Varray Collections
- Varrays to JSON Arrays

JSON Arrays to Nested Tables, Index by PLS_INTEGER, and Varray Collections

When a nested table, index by `PLS_INTEGER`, or varray collection is specified in the `RETURNING` clause, `json_value` converts the input JSON array to the PL/SQL collection type and returns an instance of the PL/SQL collection. If the input JSON is not a JSON array, a `MISMATCH` error is raised.

To convert a JSON array into a PL/SQL collection, the JSON array elements are inserted one by one into the collection. Insertion begins with the first element in the JSON array inserted at index `1` of the PL/SQL collection and ends when the last JSON array element is inserted into the collection. The collection index is incremented by `1` for each inserted element.

- A JSON null element results in a PL/SQL `NULL` element being inserted into the collection.
- If the number of elements in a JSON array exceeds the size of its corresponding varray, a `MISMATCH` error is raised.
- If the JSON element types are not convertible to the PL/SQL collection element type, a `MISMATCH` error is raised.

Example 4-8 Convert a JSON Array to an Index by PLS_INTEGER Collection

This example converts a JSON array to an index by `PLS_INTEGER` collection using the built-in function `json_value`.

```
DECLARE
    TYPE theIBPLS IS TABLE OF NUMBER INDEX BY PLS_INTEGER;
    myIBPLS theIBPLS;
BEGIN
    myIBPLS := JSON_VALUE(JSON('[1, 2, 3, 4, 5]'), '$' RETURNING theIBPLS);
END;
/
```

Running this PL/SQL block results in `myIBPLS` having the following value:

```
theIBPLS(1=>1, 2=>2, 3=>3, 4=>4, 5=>5)
```

Example 4-9 Convert a JSON Array to a Varray

This example converts a JSON array to a varray using the built-in function `json_value`.

```
DECLARE
    TYPE theVARRAY IS VARRAY(5) OF NUMBER;
    myVARRAY theVARRAY;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
    myVARRAY := JSON_VALUE(JSON('[1, 2, 3, 4, 5]'), '$' RETURNING theVARRAY);
END;
/
```

Running this PL/SQL block results in `myVARRAY` having the following value:

```
theVARRAY(1=>1, 2=>2, 3=>3, 4=>4, 5=>5)
```

Example 4-10 Convert a JSON Array to a Nested Table

This example converts a JSON array to a nested table using the built-in function `json_value`.

```
DECLARE
    TYPE theNESTEDTABLE IS TABLE OF NUMBER;
    myNESTEDTABLE theNESTEDTABLE;
BEGIN
    myNESTEDTABLE := JSON_VALUE(JSON('[1, 2, 3, 4, 5]'), '$' RETURNING
theNESTEDTABLE);
END;
/
```

Running this PL/SQL block results in `myNESTEDTABLE` having the following value:

```
theNESTEDTABLE(1=>1, 2=>2, 3=>3, 4=>4, 5=>5)
```

Varrays to JSON Arrays

Varrays are converted to JSON arrays when they are passed to a JSON constructor.

When varrays are converted to JSON arrays, each element of the collection is inserted into the JSON array beginning with the element at the smallest collection index and ending with the element at the largest collection index. The indices are not transferred into the JSON array, only the element value.

When passed to the JSON constructor, Index by `PLS_INTEGER` collections and nested types are converted to JSON objects rather than JSON arrays.

Example 4-11 Convert a Varray to a JSON Array

```
DECLARE
    TYPE theVarray IS VARRAY(4) OF NUMBER;
    myVarray theVarray := theVarray(1, 2, 3, null);
    myJSON JSON;
BEGIN
    myJSON := JSON(myVarray);
    DBMS_OUTPUT.PUT_LINE(JSON_SERIALIZE(myJSON));
END;
/
```

Result:

```
[1, 2, 3, null]
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

JSON Objects and Associative Arrays

Associative arrays can be converted to and from JSON objects using the JSON constructor and the built-in function `json_value`, respectively.

Topics

- JSON Objects to Associative Arrays
- Associative Arrays to JSON Objects

JSON Objects to Associative Arrays

When JSON objects are mapped into associative arrays, each JSON key name and value pair is inserted into the associative array based on the ordering and or collection of the associative array.

Associative array key names are case sensitive and the insert preserves the case of the JSON key name. The JSON value for the key is converted as necessary to the associative array element type and the key name/value pair is then inserted into the associative array.

Similar to SQL objects and PL/SQL records, a JSON value can be a nested object or an array and must be convertible to the associative array element type. If the value types are not convertible, a `MISMATCH` error is raised.

Example 4-12 Convert a JSON Object to an Associative Array

This example converts a JSON object to an associative array using the built-in function `json_value`.

```
DECLARE
    TYPE theASCARRAY IS TABLE OF NUMBER INDEX BY VARCHAR2(10);
    myAscArray theASCARRAY;
BEGIN
    myAscArray := JSON_VALUE(JSON('{"Key1":10, "Key2":20}'), '$' RETURNING
theASCARRAY);
END;
/
```

Running this PL/SQL block will result in an associative with two elements:

```
theASCARRAY('Key1'=>10, 'Key2'=>20)
```

Associative Arrays to JSON Objects

The process of converting an associative array to a JSON object consists of inserting every associative array key and value into the JSON object as a name/value pair. The ordering of insertions may not matter because all key names in PL/SQL associative arrays are unique and the ordering of JSON attributes is not specified in the JSON standards. However, the key values will likely be inserted based on the internal sorted order or collation of the associative array.

Because associative arrays have `varchar2` keys, the key type inserted into the JSON object is a JSON string. The case of the key in the associative array is preserved in the copy to the JSON object.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The value of the associative array element is copied into the JSON object following the key. If the element type of the associative array is a nested aggregate type, a JSON object or array matching the aggregate type is created as the JSON value.

Example 4-13 Convert an Associative Array to a JSON Object

This example converts an associative array to a JSON object using the JSON constructor.

```
DECLARE
    TYPE AsscArray IS TABLE OF VARCHAR2(10) INDEX BY VARCHAR2(10);
    myAsscArray AsscArray := AsscArray('FIRST_NAME' => 'Bob', 'LAST_NAME' =>
'Jones');
    myJson JSON;
BEGIN
    myJson := JSON(myAsscArray);
    DBMS_OUTPUT.PUT_LINE(JSON_SERIALIZE(myJson));
END;
/
```

Running this PL/SQL block will result in a JSON object with the following values:

```
{"FIRST_NAME":"Bob", "LAST_NAME":"Jones"}
```

VECTOR Data Type

A vector value is an array of non-null numeric values, all of which are of the same numeric type. A vector in PL/SQL has two storage attributes; the number of values constituting the vector is its dimension and the numeric type of the values is its format.

A vector variable in PL/SQL holds a vector value and can be flexible, partially flexible, or fully inflexible in terms of dimension, dimension format, and storage format. Assignment of a vector value to a flexible PL/SQL vector variable always succeeds and no conversion occurs. An error occurs during assignment if the value and the variable differ in the inflexible attribute(s). In all cases, the elements stored in the vector must be of the same numeric type.

If specified, the format of a vector must be one of the following: `FLOAT64`, `FLOAT32`, `INT8`, or `BINARY`. The dimension of a `BINARY` vector must be a multiple of 8. For more information about using `BINARY` vectors, see *Oracle AI Database AI Vector Search User's Guide*.

A storage format attribute of either `SPARSE` or `DENSE` can optionally be included in vector declarations. If not specified, vectors are `DENSE` by default.

A sparse vector is a vector where the vast majority of dimension values are zero. Using sparse vectors in cases when you expect most dimension values to be zero can save storage space, as only the index values that are non-zero are stored. The string representation of a `SPARSE` vector is a JSON array composed of three parts; a dimension value, a JSON array of indexes (as non-negative integers) representing non-zero dimension values, and a JSON array of those non-zero values. For example, the following sparse representation describes a vector of 128 dimensions with the values 8 and 24 at the fourth and sixth dimensions. Every other dimension value is understood to be zero.

```
[128, [4, 6], [8, 24]]
```

For more information about `SPARSE` vectors, see *Oracle AI Database AI Vector Search User's Guide*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Checks of the dimension, dimension format, and storage format are completed at runtime.

The PL/SQL `VECTOR` data type appears as its own distinct scalar type family and can be used with PL/SQL operators, passed to PL/SQL procedures and functions, set to `NULL`, and otherwise used in the same way as any other data type in PL/SQL. Note that although a vector variable can hold a `NULL` vector, the value(s) in the vector cannot be `NULL`.

Assignment semantics and handling of implicit conversion in PL/SQL differ from SQL. While SQL requires an exact match only for dimension, PL/SQL requires both format and dimension to match for a successful assignment. Additionally, SQL allows for implicit conversion between `VECTOR` and string types while PL/SQL does not support implicit conversion between vectors and any other type. Neither SQL nor PL/SQL support equality comparisons of vectors.

If a variable is declared using `%TYPE` on a vector variable or a vector column, the declared variable will be a vector that inherits the storage attributes of the referenced vector variable or column. The following example demonstrates this concept:

```
CREATE TABLE PLS_VEC_TAB(
    v1 vector,
    v2 vector(100),
    v3 vector(*, INT8),
    v4 vector(100, INT8),
    v5 vector(1024, BINARY),
    v6 vector(100, FLOAT32, DENSE),
    v7 vector(100, FLOAT32, SPARSE)
);

DECLARE
    vec0 vector;                -- dimension and format are flexible,
storage format is DENSE
    vec1 PLS_VEC_TAB.v1%TYPE;   -- dimension and format are flexible,
storage format is DENSE
    vec2 PLS_VEC_TAB.v2%TYPE;   -- dimension is 100, format is flexible,
storage format is DENSE
    vec3 PLS_VEC_TAB.v3%TYPE;   -- dimension is flexible, format is INT8,
storage format is DENSE
    vec4 PLS_VEC_TAB.v4%TYPE;   -- dimension is 100, format is INT8, storage
format is DENSE
    vec5 PLS_VEC_TAB.v5%TYPE;   -- dimension is 1024, format is BINARY,
storage format is DENSE
    vec6 PLS_VEC_TAB.v6%TYPE;   -- dimension is 100, format is FLOAT32,
storage format is DENSE
    vec7 PLS_VEC_TAB.v7%TYPE;   -- dimension is 100, format is FLOAT32,
storage format is SPARSE

    vec_0 vec0%TYPE;    -- dimension and format are flexible, storage format
is DENSE
    vec_1 vec1%TYPE;    -- dimension and format are flexible, storage format
is DENSE
    vec_2 vec2%TYPE;    -- dimension is 100, format is flexible, storage
format is DENSE
    vec_3 vec3%TYPE;    -- dimension is flexible, format is INT8, storage
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
format is DENSE
    vec_4 vec4%TYPE;    -- dimension is 100, format is INT8, storage format
is DENSE
    vec_5 vec5%TYPE;    -- dimension is 1024, format is BINARY, storage
format is DENSE
    vec_6 vec6%TYPE;    -- dimension is 100, format is FLOAT32, storage
format is DENSE
    vec_7 vec7%TYPE;    -- dimension is 100, format is FLOAT32, storage
format is SPARSE
BEGIN
    NULL;
END;
/
```

You can use the `VECTOR` data type and its instances in most places where a SQL data type is allowed, including:

- As an element or field type in records, PL/SQL collections, and `%ROWTYPE` attributes. Note that a `%ROWTYPE` attribute inherits both the dimension and format of an underlying vector column.
- In PL/SQL triggers, including with the pseudorecords `OLD` and `NEW` and in the `WHEN` clause of a conditional trigger.
- The `USING` clause supports vectors in all three bind directions; `IN`, `IN OUT`, and `OUT`.
- In the `FORALL` clause, the `RETURNING INTO` clause, and the `BULK COLLECT INTO` clause.
- As the arguments to an addition, subtraction, or multiplication operation.

The `VECTOR` data type is not currently supported in SQL collections or objects.

A variable of type `VECTOR` can come in the form of static SQL, dynamic SQL, or using `DBMS_SQL`. In all of these cases, a vector can appear as the column type, the bind type, or both. If the column and bind type are not both `VECTOR`, the remaining side must be a string type. Note that PL/SQL functions that use formal arguments of the `VECTOR` data type are not currently supported in the `WITH` clause of a SQL `SELECT` statement.

PL/SQL will use the definition of the identifier `VECTOR` in the innermost scope in which it appears. If a user-defined type is created with the name `VECTOR` and then is referenced without a name prefix, PL/SQL interprets the variable using the local definition. If no local definition exists, PL/SQL expands its search to outer scopes until the name is resolved, eventually to the Package STANDARD definition.

Topics

- VECTOR Operations Supported by PL/SQL
- VECTOR Data Type PL/SQL Code Examples

See Also

- *Oracle AI Database AI Vector Search User's Guide* for information about Oracle AI Vector Search
- *Oracle AI Database SQL Language Reference* for more information about the `VECTOR` data type

Copyright © 1996, 2025, Oracle and/or its affiliates.

VECTOR Operations Supported by PL/SQL

PL/SQL natively supports the following base operations for use with the `VECTOR` data type:

- `VECTOR`
- `TO_VECTOR`
- `FROM_VECTOR` (and `VECTOR_SERIALIZE`)[1]
- `TO_CHAR`
- `TO_CLOB`
- `VECTOR_DIMENSION_COUNT` (and `VECTOR_DIMS`)
- `VECTOR_DIMENSION_FORMAT`
- `VECTOR_NORM`
- `VECTOR_DISTANCE` is supported with the following metric options (cosine distance is the default if no metric is specified):
  - `COSINE`
  - `MANHATTAN`
  - `EUCLIDEAN`
  - `EUCLIDEAN_SQUARED`
  - `DOT`
  - `HAMMING`
  - `JACCARD`
- The following vector distance functions are also natively supported as standalone functions in PL/SQL:
  - `COSINE_DISTANCE`
  - `L1_DISTANCE` (Manhattan distance)
  - `L2_DISTANCE` (Euclidean distance)
  - `INNER_PRODUCT`
- Additionally, the following shorthand distance operators are available for the corresponding vector distances:
  - Cosine distance: `<=>`
  - Euclidean distance: `<->`
  - Dot product: `<#>`

Note that the corresponding vector distance metrics, standalone functions, and shorthand distance operators will have equivalent results. For example, `VECTOR_DISTANCE(v1, v2, COSINE)` is equal to `COSINE_DISTANCE(v1, v2)` is equal to `v1 <=> v2`.

[1] The optional `RETURNING` clause is not supported with `TO_VECTOR` and `VECTOR_SERIALIZE`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

To construct a vector in PL/SQL, use `VECTOR` or `TO_VECTOR`. For example, see the following variable assignments:

```
v VECTOR := VECTOR('[1, 2, 3]');
v VECTOR := TO_VECTOR('[1, 2, 3]');
```

The `ON CONVERSION ERROR` clause used by SQL in explicit conversions to determine a default value if conversion fails is not supported by PL/SQL. Instead, a default value can be set using a code block in the exception handler.

You can use the `VECTOR_DISTANCE` function with metric keyword natively in PL/SQL, use the previously listed distance functions, or call `VECTOR_DISTANCE` from static SQL. The distance is returned as a `BINARY_DOUBLE`. Consider the following valid assignments:

```
dist := COSINE_DISTANCE(v1, v2);
dist := VECTOR_DISTANCE(v1, v2, COSINE);
dist := v1 <=> v2;
SELECT VECTOR_DISTANCE(v1, v2, COSINE) INTO dist;
SELECT v1 <=> v2 INTO dist;
```

Arithmetic operators for addition, subtraction, and multiplication can be applied to vectors dimension-wise. Both sides of the operation must evaluate to vectors with matching dimensions and must not be `BINARY` or `SPARSE` vectors. The resulting vector has the same number of dimensions as the operands and the format is determined based on the formats of the inputs. If one side of the operation is not a vector, an attempt is made automatically to convert the value to a vector. If the conversion fails, an error is raised.

The format used for the result is ranked in the following order: flexible, `FLOAT64`, `FLOAT32`, then `INT8`. As in, if either side of the operation has a flexible format, the result will be flexible, otherwise, if either side has the format `FLOAT64`, the result will be `FLOAT64`, and so on.

The syntax for arithmetic operators is as follows:

- Addition: `expr1 + expr2`
- Subtraction: `expr1 - expr2`
- Multiplication: `expr1 * expr2`

If either side of the arithmetic operation is `NULL`, the result is `NULL`. In the case of dimension overflow, an error is raised. For example, adding `VECTOR('[1, 127]', 2, INT8)` to `VECTOR('[1, 1]', 2, INT8)` results in an error because `127+1=128`, which overflows the `INT8` format.

See Also

- *Oracle AI Database SQL Language Reference* for syntax and semantic information about vector SQL functions
- *Oracle AI Database AI Vector Search User's Guide* for more information about performing arithmetic operations with vectors

VECTOR Data Type PL/SQL Code Examples

The PL/SQL code examples provided here show how to use the `VECTOR` data type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 4-14 Use the VECTOR Data Type with PL/SQL

The first part of this example demonstrates how to select a vector into a PL/SQL vector variable, in this case using `%TYPE` on a vector column.

```
DROP TABLE theVectorTable;
CREATE TABLE theVectorTable (embedding VECTOR(3, float32), id NUMBER);
INSERT INTO theVectorTable VALUES ('[1.11, 2.22, 3.33]', 1);
INSERT INTO theVectorTable VALUES ('[4.44, 5.55, 6.66]', 2);
INSERT INTO theVectorTable VALUES ('[7.77, 8.88, 9.99]', 3);

SET SERVEROUTPUT ON;

DECLARE
  v_embedding theVectorTable.embedding%TYPE;
BEGIN
  SELECT embedding INTO v_embedding FROM theVectorTable WHERE id=3;
  DBMS_OUTPUT.PUT_LINE('Embedding is ' || FROM_VECTOR(v_embedding));
END;
/
```

Result:

```
Embedding is [7.76999998E+000,8.88000011E+000,9.98999977E+000]
```

The following anonymous block uses a cursor with bulk fetch to capture `theVectorTable`'s vector and id data into a `table%ROWTYPE` index table.

```
DECLARE
  TYPE vecTabT IS TABLE OF theVectorTable%ROWTYPE INDEX BY BINARY_INTEGER;
  v_vecTabT vecTabT;
  CURSOR c IS SELECT * FROM theVectorTable;
BEGIN
  OPEN c;
  FETCH c BULK COLLECT INTO v_vecTabT;
  CLOSE c;

  -- display the contents of the vector index table
  FOR i IN 1..v_vecTabT.LAST LOOP
    DBMS_OUTPUT.PUT_LINE('Embedding ID ' || v_vecTabT(i).id || ': ' ||
            FROM_VECTOR(v_vecTabT(i).embedding));
  END LOOP;
END;
/
```

Result:

```
Embedding ID 1: [1.11000001E+000,2.22000003E+000,3.32999992E+000]
Embedding ID 2: [4.44000006E+000,5.55000019E+000,6.65999985E+000]
Embedding ID 3: [7.76999998E+000,8.88000011E+000,9.98999977E+000]
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 4-15 Use the VECTOR Data Type with a PL/SQL Trigger

This example creates a `BEFORE UPDATE` trigger on `theVectorTable` that inserts vector values into `vecLogTable`:

```
DROP TABLE vecLogTable;
DROP SEQUENCE vecTrgSeq;
CREATE TABLE vecLogTable (embedding VECTOR(3, float32),
        describe VARCHAR2(25), seq NUMBER);
CREATE SEQUENCE vecTrgSeq;

CREATE OR REPLACE TRIGGER vecTrg
BEFORE UPDATE ON theVectorTable
FOR EACH ROW
BEGIN
  INSERT INTO vecLogTable VALUES (:old.embedding, 'OLD.VECTRG',
          vecTrgSeq.NEXTVAL);
  INSERT INTO vecLogTable VALUES (:new.embedding, 'NEW.VECTRG',
          vecTrgSeq.NEXTVAL);
END;
/

UPDATE theVectorTable SET embedding='[2.22, 4.44, 6.66]' WHERE id=2;
SELECT * FROM vecLogTable ORDER BY seq;
```

Result:

```
EMBEDDING                                           DESCRIBE         SEQ
--------------------------------------------------- ---------------- ---
[4.44000006E+000,5.55000019E+000,6.65999985E+000]  OLD.VECTRG         1
[2.22000003E+000,4.44000006E+000,6.65999985E+000]  NEW.VECTRG         2
```

Example 4-16 Use Vector Distance Functions with PL/SQL

This example demonstrates PL/SQL support for vector distance functions.

```
DECLARE
  v1 VECTOR := TO_VECTOR('[1, 2, 3]');
  v2 VECTOR := TO_VECTOR('[4, 5, 6]');
  v3 VECTOR := TO_VECTOR('[1, 2, 0, 6]', *, BINARY);
  v4 VECTOR := TO_VECTOR('[0, 6, 0, 3]', *, BINARY);
  man_dist NUMBER;
  euc_dist NUMBER;
  cos_dist NUMBER;
  inn_dist NUMBER;
  ham_dist NUMBER;
  dot_dist NUMBER;
  jac_dist NUMBER;
BEGIN
  man_dist := L1_DISTANCE(v1, v2); --Manhattan Distance
  euc_dist := L2_DISTANCE(v1, v2); --Euclidean Distance
  cos_dist := COSINE_DISTANCE(v1, v2); --Cosine Distance
  inn_dist := INNER_PRODUCT(v1, v2); --Inner Product
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  --The Hamming Distance has no standalone function in PL/SQL
  ham_dist := VECTOR_DISTANCE(v1, v2, HAMMING);

  --The Negative Inner (Dot) Product has no standalone function in PL/SQL
  dot_dist := VECTOR_DISTANCE(v1, v2, DOT);

  --The Jaccard Distance has no standalone function in PL/SQL
  jac_dist := VECTOR_DISTANCE(v3, v4, JACCARD);

  DBMS_OUTPUT.PUT_LINE('The Manhattan distance is: ' || man_dist);
  DBMS_OUTPUT.PUT_LINE('The Euclidean distance is: ' || euc_dist);
  DBMS_OUTPUT.PUT_LINE('The Cosine distance is: ' || cos_dist);
  DBMS_OUTPUT.PUT_LINE('The Inner Product is: ' || inn_dist);
  DBMS_OUTPUT.PUT_LINE('The Hamming distance is: ' || ham_dist);
  DBMS_OUTPUT.PUT_LINE('The Dot Product is: ' || dot_dist);
  DBMS_OUTPUT.PUT_LINE('The Jaccard Distance between the BINARY vectors v3
and v4 is: ' || jac_dist);
END;
/
```

Result:

```
The Manhattan distance is: 9
The Euclidean distance is: 5.1961524227066329
The Cosine distance is: .025368153802923787
The Inner Product is: 32
The Hamming distance is: 3
The Dot Product is: -32
The Jaccard Distance between the BINARY vectors v3 and v4
is: .66666666666666674
```

Example 4-17 Use Shorthand Distance Operators

Note that because PL/SQL does not support implicit conversion with vectors, you must construct the vectors before the variable assignment or in the same line. This is the same behavior as the other distance functions in PL/SQL.

```
DECLARE
  v1 VECTOR := VECTOR('[1, 2, 3]');
  v2 VECTOR := VECTOR('[4, 5, 6]');
  cos_dist BINARY_DOUBLE;
  euc_dist BINARY_DOUBLE;
  dot_dist BINARY_DOUBLE;
BEGIN
  cos_dist := v1 <=> v2;
  euc_dist := v1 <-> v2;
  dot_dist := v1 <#> v2;

  DBMS_OUTPUT.PUT_LINE(cos_dist);
  DBMS_OUTPUT.PUT_LINE(euc_dist);
  DBMS_OUTPUT.PUT_LINE(dot_dist);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
2.5368153802923787E-002
5.1961524227066329E+000
-3.2E+001
```

Example 4-18 Perform Arithmetic Operations on Vectors

```
DECLARE
  v1 VECTOR := VECTOR('[10, 20, 30]', 3, INT8);
  v2 VECTOR := VECTOR('[6, 4, 2]', 3, INT8);
BEGIN
  DBMS_OUTPUT.PUT_LINE(TO_CHAR(v1 + v2));
  DBMS_OUTPUT.PUT_LINE(TO_CHAR(v1 - v2));
  DBMS_OUTPUT.PUT_LINE(TO_CHAR(v1 * v2));
END;
/
```

Result:

```
[16,24,32]
[4,16,28]
[60,80,60]
```

Example 4-19 Declare DENSE and SPARSE Vectors in PL/SQL

```
DECLARE
  vs1 VECTOR(*, *, SPARSE) := VECTOR('[10, [0, 3, 4, 6, 7], [1.9, 4, 7.2, 30,
60]]', *, *, SPARSE);
  vs2 VECTOR(*, *, SPARSE) := VECTOR('[10, [1, 3, 4, 8, 9], [4.5, 7.6, 4,
8.1, 5]]', *, *, SPARSE);

  vd1 VECTOR(*, *, DENSE) := VECTOR('[1.9, 0, 0, 4, 7.2, 0, 30, 60, 0, 0]',
*, *, DENSE);
  vd2 VECTOR(*, *, DENSE) := VECTOR('[0, 4.5, 0, 7.6, 4, 0, 0, 0, 8.1, 5]',
*, *, DENSE);
BEGIN
  DBMS_OUTPUT.PUT_LINE('Vector Distance Sparse: ' ||
TRUNC(VECTOR_DISTANCE(vs1, vs2), 5));
  DBMS_OUTPUT.PUT_LINE('Vector Distance Dense:  ' ||
TRUNC(VECTOR_DISTANCE(vd1, vd2), 5));
END;
/
```

Result:

```
Vector Distance Sparse: .93556
Vector Distance Dense:  .93556
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

CHAR and VARCHAR2 Variables

Topics

- Assigning or Inserting Too-Long Values
- Declaring Variables for Multibyte Characters
- Differences Between CHAR and VARCHAR2 Data Types

Assigning or Inserting Too-Long Values

If the value that you assign to a character variable is longer than the maximum size of the variable, an error occurs. For example:

```
DECLARE
  c VARCHAR2(3 CHAR);
BEGIN
  c := 'abc  ';
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error: character string buffer too small
ORA-06512: at line 4
```

Similarly, if you insert a character variable into a column, and the value of the variable is longer than the defined width of the column, an error occurs. For example:

```
DROP TABLE t;
CREATE TABLE t (c CHAR(3 CHAR));

DECLARE
  s VARCHAR2(5 CHAR) := 'abc  ';
BEGIN
  INSERT INTO t(c) VALUES(s);
END;
/
```

Result:

```
BEGIN
*
ERROR at line 1:
ORA-12899: value too large for column "HR"."T"."C" (actual: 5, maximum: 3)
ORA-06512: at line 4
```

To strip trailing blanks from a character value before assigning it to a variable or inserting it into a column, use the `RTRIM` function, explained in *Oracle Database SQL Language Reference*. For example:

```
DECLARE
  c VARCHAR2(3 CHAR);
BEGIN
  c := RTRIM('abc  ');
  INSERT INTO t(c) VALUES(RTRIM('abc  '));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
PL/SQL procedure successfully completed.
```

Declaring Variables for Multibyte Characters

The maximum *size* of a `CHAR` or `VARCHAR2` variable is 32,767 bytes, whether you specify the maximum size in characters or bytes. The maximum *number of characters* in the variable depends on the character set type and sometimes on the characters themselves:

Character Set Type	Maximum Number of Characters
Single-byte character set	32,767
n-byte fixed-width multibyte character set (for example, AL16UTF16)	`FLOOR(32,767/n)`
n-byte variable-width multibyte character set with character widths between 1 and *n* bytes (for example, JA16SJIS or AL32UTF8)	Depends on characters themselves—can be anything from 32,767 (for a string containing only 1-byte characters) through `FLOOR(32,767/n)` (for a string containing only *n*-byte characters).

When declaring a `CHAR` or `VARCHAR2` variable, to ensure that it can always hold *n* characters in any multibyte character set, declare its length in characters—that is, `CHAR(n CHAR)` or `VARCHAR2(n CHAR)`, where *n* does not exceed `FLOOR(32767/4)` = 8191.

> **See Also**
>
> *Oracle Database Globalization Support Guide* for information about Oracle Database character set support

Differences Between CHAR and VARCHAR2 Data Types

`CHAR` and `VARCHAR2` data types differ in:

- Predefined Subtypes
- How Blank-Padding Works
- Value Comparisons

Predefined Subtypes

The `CHAR` data type has one predefined subtype in both PL/SQL and SQL—`CHARACTER`.

The `VARCHAR2` data type has one predefined subtype in both PL/SQL and SQL, `VARCHAR`, and an additional predefined subtype in PL/SQL, `STRING`.

Each subtype has the same range of values as its base type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> In a future PL/SQL release, to accommodate emerging SQL standards, VARCHAR might become a separate data type, no longer synonymous with VARCHAR2.

How Blank-Padding Works

This explains the differences and considerations of using blank-padding with CHAR and VARCHAR2.

Consider these situations:

- The value that you assign to a variable is shorter than the maximum size of the variable.
- The value that you insert into a column is shorter than the defined width of the column.
- The value that you retrieve from a column into a variable is shorter than the maximum size of the variable.

If the data type of the receiver is CHAR, PL/SQL blank-pads the value to the maximum size. Information about trailing blanks in the original value is lost.

If the data type of the receiver is VARCHAR2, PL/SQL neither blank-pads the value nor strips trailing blanks. Character values are assigned intact, and no information is lost.

Example 4-20 CHAR and VARCHAR2 Blank-Padding Difference

In this example, both the CHAR variable and the VARCHAR2 variable have the maximum size of 10 characters. Each variable receives a five-character value with one trailing blank. The value assigned to the CHAR variable is blank-padded to 10 characters, and you cannot tell that one of the six trailing blanks in the resulting value was in the original value. The value assigned to the VARCHAR2 variable is not changed, and you can see that it has one trailing blank.

```
DECLARE
  first_name  CHAR(10 CHAR);
  last_name   VARCHAR2(10 CHAR);
BEGIN
  first_name := 'John ';
  last_name  := 'Chen ';

  DBMS_OUTPUT.PUT_LINE('*' || first_name || '*');
  DBMS_OUTPUT.PUT_LINE('*' || last_name || '*');
END;
/
```

Result:

```
*John      *
*Chen *
```

Value Comparisons

The SQL rules for comparing character values apply to PL/SQL character variables.

Whenever one or both values in the comparison have the data type VARCHAR2 or NVARCHAR2, nonpadded comparison semantics apply; otherwise, blank-padded semantics apply. For more information, see *Oracle Database SQL Language Reference*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

LONG and LONG RAW Variables

> **Note**
>
> Oracle supports the `LONG` and `LONG RAW` data types only for backward compatibility with existing applications. For new applications:
>
> - Instead of `LONG`, use `VARCHAR2(32760)`, `BLOB`, `CLOB` or `NCLOB`.
> - Instead of `LONG RAW`, use `RAW(32760)` or `BLOB`.
>
> For information about how to migrate columns from `LONG` data types to `LOB` data types, see *Oracle AI Database SecureFiles and Large Objects Developer's Guide*.

You can insert any `LONG` value into a `LONG` column. You can insert any `LONG RAW` value into a `LONG RAW` column. You cannot retrieve a value longer than 32,760 bytes from a `LONG` or `LONG RAW` column into a `LONG` or `LONG RAW` variable.

You can insert any `CHAR` or `VARCHAR2` value into a `LONG` column. You cannot retrieve a value longer than 32,767 bytes from a `LONG` column into a `CHAR` or `VARCHAR2` variable.

You can insert any `RAW` value into a `LONG RAW` column. You cannot retrieve a value longer than 32,767 bytes from a `LONG RAW` column into a `RAW` variable.

> **See Also**
>
> "Trigger LONG and LONG RAW Data Type Restrictions" for restrictions on `LONG` and `LONG RAW` data types in triggers

ROWID and UROWID Variables

When you retrieve a rowid into a `ROWID` variable, use the `ROWIDTOCHAR` function to convert the binary value to a character value. For information about this function, see *Oracle Database SQL Language Reference*.

To convert the value of a `ROWID` variable to a rowid, use the `CHARTOROWID` function, explained in *Oracle Database SQL Language Reference*. If the value does not represent a valid rowid, PL/SQL raises the predefined exception `SYS_INVALID_ROWID`.

To retrieve a rowid into a `UROWID` variable, or to convert the value of a `UROWID` variable to a rowid, use an assignment statement; conversion is implicit.

> **Note**
>
> - `UROWID` is a more versatile data type than `ROWID`, because it is compatible with both logical and physical rowids.
> - When you update a row in a table compressed with Hybrid Columnar Compression (HCC), the `ROWID` of the row changes. HCC, a feature of certain Oracle storage systems, is described in *Oracle Database Concepts*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> *Oracle Database PL/SQL Packages and Types Reference* for information about the `DBMS_ROWID` package, whose subprograms let you create and return information about `ROWID` values (but not `UROWID` values)

PLS_INTEGER and BINARY_INTEGER Data Types

The PL/SQL data types `PLS_INTEGER` and `BINARY_INTEGER` are identical.

For simplicity, this document uses `PLS_INTEGER` to mean both `PLS_INTEGER` and `BINARY_INTEGER`.

The `PLS_INTEGER` data type stores signed integers in the range -2,147,483,648 through 2,147,483,647, represented in 32 bits.

The `PLS_INTEGER` data type has these advantages over the `NUMBER` data type and `NUMBER` subtypes:

- `PLS_INTEGER` values require less storage.
- `PLS_INTEGER` operations use hardware arithmetic, so they are faster than `NUMBER` operations, which use library arithmetic.

For efficiency, use `PLS_INTEGER` values for all calculations in its range.

Topics

- Preventing PLS_INTEGER Overflow
- Predefined PLS_INTEGER Subtypes
- SIMPLE_INTEGER Subtype of PLS_INTEGER

Preventing PLS_INTEGER Overflow

A calculation with two `PLS_INTEGER` values that overflows the `PLS_INTEGER` range raises an overflow exception.

For calculations outside the `PLS_INTEGER` range, use `INTEGER`, a predefined subtype of the `NUMBER` data type.

Example 4-21 PLS_INTEGER Calculation Raises Overflow Exception

This example shows that a calculation with two `PLS_INTEGER` values that overflows the `PLS_INTEGER` range raises an overflow exception, even if you assign the result to a `NUMBER` data type.

```
DECLARE
  p1 PLS_INTEGER := 2147483647;
  p2 PLS_INTEGER := 1;
  n NUMBER;
BEGIN
  n := p1 + p2;
END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
*
ERROR at line 1:
ORA-01426: numeric overflow
ORA-06512: at line 6
```

Example 4-22 Preventing Example 4-21 Overflow

This example shows the correct use of the INTEGER predefined subtype for calculations outside the PLS_INTEGER range.

```
DECLARE
  p1 PLS_INTEGER := 2147483647;
  p2 INTEGER := 1;
  n NUMBER;
BEGIN
  n := p1 + p2;
END;
/
```

Result:

```
PL/SQL procedure successfully completed.
```

Predefined PLS_INTEGER Subtypes

This summary lists the predefined subtypes of the PLS_INTEGER data type and describes the data they store.

Table 4-3 Predefined Subtypes of PLS_INTEGER Data Type

Data Type	Data Description
NATURAL	Nonnegative PLS_INTEGER value
NATURALN	Nonnegative PLS_INTEGER value with NOT NULL constraint
POSITIVE	Positive PLS_INTEGER value
POSITIVEN	Positive PLS_INTEGER value with NOT NULL constraint
SIGNTYPE	PLS_INTEGER value -1, 0, or 1 (useful for programming tri-state logic)
SIMPLE_INTEGER	PLS_INTEGER value with NOT NULL constraint.

PLS_INTEGER and its subtypes can be implicitly converted to these data types:

- CHAR
- VARCHAR2
- NUMBER
- LONG

All of the preceding data types except LONG, and all PLS_INTEGER subtypes, can be implicitly converted to PLS_INTEGER.

A PLS_INTEGER value can be implicitly converted to a PLS_INTEGER subtype only if the value does not violate a constraint of the subtype.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - "NOT NULL Constraint"for information about the `NOT NULL` constraint
> - "SIMPLE_INTEGER Subtype of PLS_INTEGER" for more information about `SIMPLE_INTEGER`

Example 4-23 Violating Constraint of SIMPLE_INTEGER Subtype

This example shows that casting the `PLS_INTEGER` value `NULL` to the `SIMPLE_INTEGER` subtype raises an exception.

```
DECLARE
  a SIMPLE_INTEGER := 1;
  b PLS_INTEGER := NULL;
BEGIN
  a := b;
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error
ORA-06512: at line 5
```

SIMPLE_INTEGER Subtype of PLS_INTEGER

`SIMPLE_INTEGER` is a predefined subtype of the `PLS_INTEGER` data type.

`SIMPLE_INTEGER` has the same range as `PLS_INTEGER` and has a `NOT NULL` constraint. It differs significantly from `PLS_INTEGER` in its overflow semantics.

If you know that a variable will never have the value `NULL` or need overflow checking, declare it as `SIMPLE_INTEGER` rather than `PLS_INTEGER`. Without the overhead of checking for nullness and overflow, `SIMPLE_INTEGER` performs significantly better than `PLS_INTEGER`.

Topics

- SIMPLE_INTEGER Overflow Semantics
- Expressions with Both SIMPLE_INTEGER and Other Operands
- Integer Literals in SIMPLE_INTEGER Range

> **See Also**
>
> "NOT NULL Constraint"

SIMPLE_INTEGER Overflow Semantics

If and only if all operands in an expression have the data type `SIMPLE_INTEGER`, PL/SQL uses two's complement arithmetic and ignores overflows.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Because overflows are ignored, values can wrap from positive to negative or from negative to positive; for example:

$2^{30} + 2^{30} = 0x40000000 + 0x40000000 = 0x80000000 = -2^{31}$

$-2^{31} + -2^{31} = 0x80000000 + 0x80000000 = 0x00000000 = 0$

For example, this block runs without errors:

```
DECLARE
  n SIMPLE_INTEGER := 2147483645;
BEGIN
  FOR j IN 1..4 LOOP
    n := n + 1;
    DBMS_OUTPUT.PUT_LINE(TO_CHAR(n, 'S9999999999'));
  END LOOP;
  FOR j IN 1..4 LOOP
   n := n - 1;
   DBMS_OUTPUT.PUT_LINE(TO_CHAR(n, 'S9999999999'));
  END LOOP;
END;
/
```

Result:

```
+2147483646
+2147483647
-2147483648
-2147483647
-2147483648
+2147483647
+2147483646
+2147483645

PL/SQL procedure successfully completed.
```

Expressions with Both SIMPLE_INTEGER and Other Operands

If an expression has both `SIMPLE_INTEGER` and other operands, PL/SQL implicitly converts the `SIMPLE_INTEGER` values to `PLS_INTEGER NOT NULL`.

The PL/SQL compiler issues a warning when `SIMPLE_INTEGER` and other values are mixed in a way that might negatively impact performance by inhibiting some optimizations.

Integer Literals in SIMPLE_INTEGER Range

Integer literals in the `SIMPLE_INTEGER` range have the data type `SIMPLE_INTEGER`.

However, to ensure backward compatibility, when all operands in an arithmetic expression are integer literals, PL/SQL treats the integer literals as if they were cast to `PLS_INTEGER`.

User-Defined PL/SQL Subtypes

PL/SQL lets you define your own subtypes.

The base type can be any scalar or user-defined PL/SQL data type specifier such as `CHAR`, `DATE`, or `RECORD` (including a previously defined user-defined subtype).

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The information in this topic applies to both user-defined subtypes and the predefined subtypes listed in PL/SQL Predefined Data Types.

Subtypes can:

- Provide compatibility with ANSI/ISO data types
- Show the intended use of data items of that type
- Detect out-of-range values

Topics

- Unconstrained Subtypes
- Constrained Subtypes
- Subtypes with Base Types in Same Data Type Family

Unconstrained Subtypes

An **unconstrained subtype** has the same set of values as its base type, so it is only another name for the base type.

Therefore, unconstrained subtypes of the same base type are interchangeable with each other and with the base type. No data type conversion occurs.

To define an unconstrained subtype, use this syntax:

```
SUBTYPE subtype_name IS base_type
```

For information about *subtype_name* and *base_type*, see ***subtype***.

An example of an unconstrained subtype, which PL/SQL predefines for compatibility with ANSI, is:

```
SUBTYPE "DOUBLE PRECISION" IS FLOAT
```

Example 4-24 User-Defined Unconstrained Subtypes Show Intended Use

In this example, the unconstrained subtypes `Balance` and `Counter` show the intended uses of data items of their types.

```
DECLARE
  SUBTYPE Balance IS NUMBER;

  checking_account        Balance(6,2);
  savings_account         Balance(8,2);
  certificate_of_deposit  Balance(8,2);
  max_insured  CONSTANT   Balance(8,2) := 250000.00;

  SUBTYPE Counter IS NATURAL;

  accounts     Counter := 1;
  deposits     Counter := 0;
  withdrawals  Counter := 0;
  overdrafts   Counter := 0;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PROCEDURE deposit (
    account  IN OUT Balance,
    amount   IN     Balance
  ) IS
  BEGIN
    account  := account + amount;
    deposits := deposits + 1;
  END;

BEGIN
  NULL;
END;
/
```

Constrained Subtypes

A **constrained subtype** has only a subset of the values of its base type.

If the base type lets you specify size, precision and scale, or a range of values, then you can specify them for its subtypes. The subtype definition syntax is:

```
SUBTYPE subtype_name IS base_type
  { precision [, scale ] | RANGE low_value .. high_value } [ NOT NULL ]
```

Otherwise, the only constraint that you can put on its subtypes is `NOT NULL`:

```
SUBTYPE subtype_name IS base_type [ NOT NULL ]
```

> **Note**
>
> The only base types for which you can specify a range of values are `PLS_INTEGER` and its subtypes (both predefined and user-defined).

A constrained subtype can be implicitly converted to its base type, but the base type can be implicitly converted to the constrained subtype only if the value does not violate a constraint of the subtype.

A constrained subtype can be implicitly converted to another constrained subtype with the same base type only if the source value does not violate a constraint of the target subtype.

> **See Also**
>
> - "*subtype_definition ::=*" syntax diagram
> - "*subtype*" semantic description
> - "Example 4-23", "Violating Constraint of SIMPLE_INTEGER Subtype"
> - "Formal Parameters of Constrained Subtypes"
> - "NOT NULL Constraint"

Example 4-25 User-Defined Constrained Subtype Detects Out-of-Range Values

In this example, the constrained subtype `Balance` detects out-of-range values.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  SUBTYPE Balance IS NUMBER(8,2);

  checking_account  Balance;
  savings_account   Balance;

BEGIN
  checking_account := 2000.00;
  savings_account  := 1000000.00;
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error: number precision too large
ORA-06512: at line 9
```

Example 4-26 Implicit Conversion Between Constrained Subtypes with Same Base Type

In this example, the three constrained subtypes have the same base type. The first two subtypes can be implicitly converted to the third subtype, but not to each other.

```
DECLARE
  SUBTYPE Digit        IS PLS_INTEGER RANGE 0..9;
  SUBTYPE Double_digit IS PLS_INTEGER RANGE 10..99;
  SUBTYPE Under_100    IS PLS_INTEGER RANGE 0..99;

  d   Digit        :=  4;
  dd  Double_digit := 35;
  u   Under_100;
BEGIN
  u := d;   -- Succeeds; Under_100 range includes Digit range
  u := dd;  -- Succeeds; Under_100 range includes Double_digit range
  dd := d;  -- Raises error; Double_digit range does not include Digit range
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error
ORA-06512: at line 12
```

Subtypes with Base Types in Same Data Type Family

If two subtypes have different base types in the same data type family, then one subtype can be implicitly converted to the other only if the source value does not violate a constraint of the target subtype.

For the predefined PL/SQL data types and subtypes, grouped by data type family, see PL/SQL Predefined Data Types.

Example 4-27 Implicit Conversion Between Subtypes with Base Types in Same Family

In this example, the subtypes `Word` and `Text` have different base types in the same data type family. The first assignment statement implicitly converts a `Word` value to `Text`. The second

Copyright © 1996, 2025, Oracle and/or its affiliates.

assignment statement implicitly converts a `Text` value to `Word`. The third assignment statement cannot implicitly convert the `Text` value to `Word`, because the value is too long.

```
DECLARE
  SUBTYPE Word IS CHAR(6);
  SUBTYPE Text IS VARCHAR2(15);

  verb       Word := 'run';
  sentence1  Text;
  sentence2  Text := 'Hurry!';
  sentence3  Text := 'See Tom run.';

BEGIN
  sentence1 := verb;  -- 3-character value, 15-character limit
  verb := sentence2;  -- 6-character value, 6-character limit
  verb := sentence3;  -- 12-character value, 6-character limit
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error: character string buffer too small
ORA-06512: at line 13
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

5

PL/SQL Control Statements

PL/SQL has three categories of control statements: conditional selection statements, loop statements and sequential control statements.

PL/SQL categories of control statements are:

- **Conditional selection statements**, which run different statements for different data values.

  The conditional selection statements are `IF` and `CASE`.

- **Loop statements**, which run the same statements with a series of different data values.

  The loop statements are the basic `LOOP`, `FOR LOOP`, and `WHILE LOOP`.

  The `EXIT` statement transfers control to the end of a loop. The `CONTINUE` statement exits the current iteration of a loop and transfers control to the next iteration. Both `EXIT` and `CONTINUE` have an optional `WHEN` clause, where you can specify a condition.

- **Sequential control statements**, which are not crucial to PL/SQL programming.

  The sequential control statements are `GOTO`, which goes to a specified statement, and `NULL`, which does nothing.

Conditional Selection Statements

The **conditional selection statements**, `IF` and `CASE`, run different statements for different data values.

The `IF` statement either runs or skips a sequence of one or more statements, depending on a condition. The `IF` statement has these forms:

- `IF THEN`
- `IF THEN ELSE`
- `IF THEN ELSIF`

The `CASE` statement chooses from a sequence of conditions, and runs the corresponding statement. The `CASE` statement has these forms:

- Simple `CASE` statement, which evaluates a single expression and compares it to several potential values.
- Searched `CASE` statement, which evaluates multiple conditions and chooses the first one that is true.

The `CASE` statement is appropriate when a different action is to be taken for each alternative.

IF THEN Statement

The `IF THEN` statement either runs or skips a sequence of one or more statements, depending on a condition.

The `IF THEN` statement has this structure:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
IF condition THEN
  statements
END IF;
```

If the *condition* is true, the *statements* run; otherwise, the IF statement does nothing.

For complete syntax, see "IF Statement".

Tip

Avoid clumsy IF statements such as:

```
IF new_balance < minimum_balance THEN
  overdrawn := TRUE;
ELSE
  overdrawn := FALSE;
END IF;
```

Instead, assign the value of the BOOLEAN expression directly to a BOOLEAN variable:

```
overdrawn := new_balance < minimum_balance;
```

A BOOLEAN variable is either TRUE, FALSE, or NULL. Do not write:

```
IF overdrawn = TRUE THEN
  RAISE insufficient_funds;
END IF;
```

Instead, write:

```
IF overdrawn THEN
  RAISE insufficient_funds;
END IF;
```

Example 5-1 IF THEN Statement

In this example, the statements between THEN and END IF run if and only if the value of sales is greater than quota+200.

```
DECLARE
  PROCEDURE p (
    sales  NUMBER,
    quota  NUMBER,
    emp_id NUMBER
  )
  IS
    bonus    NUMBER := 0;
    updated  VARCHAR2(3) := 'No';
  BEGIN
    IF sales > (quota + 200) THEN
      bonus := (sales - quota)/4;

      UPDATE employees
      SET salary = salary + bonus
      WHERE employee_id = emp_id;

      updated := 'Yes';
    END IF;

    DBMS_OUTPUT.PUT_LINE (
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      'Table updated?  ' || updated || ', ' ||
      'bonus = ' || bonus || '.'
    );
  END p;
BEGIN
  p(10100, 10000, 120);
  p(10500, 10000, 121);
END;
/
```

Result:

```
Table updated?  No, bonus = 0.
Table updated?  Yes, bonus = 125.
```

IF THEN ELSE Statement

The `IF THEN ELSE` statement has this structure:

```
IF condition THEN
  statements
ELSE
  else_statements
END IF;
```

If the value of *`condition`* is true, the *`statements`* run; otherwise, the *`else_statements`* run.

`IF` statements can be nested, as in Example 5-3.

For complete syntax, see "IF Statement".

Example 5-2 IF THEN ELSE Statement

In this example, the statement between `THEN` and `ELSE` runs if and only if the value of `sales` is greater than `quota`+200; otherwise, the statement between `ELSE` and `END IF` runs.

```
DECLARE
  PROCEDURE p (
    sales  NUMBER,
    quota  NUMBER,
    emp_id NUMBER
  )
  IS
    bonus  NUMBER := 0;
  BEGIN
    IF sales > (quota + 200) THEN
      bonus := (sales - quota)/4;
    ELSE
      bonus := 50;
    END IF;

    DBMS_OUTPUT.PUT_LINE('bonus = ' || bonus);

    UPDATE employees
    SET salary = salary + bonus
    WHERE employee_id = emp_id;
  END p;
BEGIN
  p(10100, 10000, 120);
  p(10500, 10000, 121);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
bonus = 50
bonus = 125
```

Example 5-3 Nested IF THEN ELSE Statements

```
DECLARE
  PROCEDURE p (
    sales  NUMBER,
    quota  NUMBER,
    emp_id NUMBER
  )
  IS
    bonus  NUMBER := 0;
  BEGIN
    IF sales > (quota + 200) THEN
      bonus := (sales - quota)/4;
    ELSE
      IF sales > quota THEN
        bonus := 50;
      ELSE
        bonus := 0;
      END IF;
    END IF;

    DBMS_OUTPUT.PUT_LINE('bonus = ' || bonus);

    UPDATE employees
    SET salary = salary + bonus
    WHERE employee_id = emp_id;
  END p;
BEGIN
  p(10100, 10000, 120);
  p(10500, 10000, 121);
  p(9500, 10000, 122);
END;
/
```

Result:

```
bonus = 50
bonus = 125
bonus = 0
```

IF THEN ELSIF Statement

The `IF THEN ELSIF` statement has this structure:

```
IF condition_1 THEN
  statements_1
ELSIF condition_2 THEN
  statements_2
[ ELSIF condition_3 THEN
    statements_3
]...
[ ELSE
    else_statements
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
]
END IF;
```

The `IF THEN ELSIF` statement runs the first *`statements`* for which *`condition`* is true. Remaining conditions are not evaluated. If no *`condition`* is true, the *`else_statements`* run, if they exist; otherwise, the `IF THEN ELSIF` statement does nothing.

A single `IF THEN ELSIF` statement is easier to understand than a logically equivalent nested `IF THEN ELSE` statement:

```
-- IF THEN ELSIF statement

IF condition_1 THEN statements_1;
  ELSIF condition_2 THEN statements_2;
  ELSIF condition_3 THEN statement_3;
END IF;

-- Logically equivalent nested IF THEN ELSE statements

IF condition_1 THEN
  statements_1;
ELSE
  IF condition_2 THEN
    statements_2;
  ELSE
    IF condition_3 THEN
      statements_3;
    END IF;
  END IF;
END IF;
```

For complete syntax, see "IF Statement".

Example 5-4 IF THEN ELSIF Statement

In this example, when the value of `sales` is larger than 50000, both the first and second conditions are true. However, because the first condition is true, `bonus` is assigned the value 1500, and the second condition is never tested. After `bonus` is assigned the value 1500, control passes to the `DBMS_OUTPUT.PUT_LINE` invocation.

```
DECLARE
  PROCEDURE p (sales NUMBER)
  IS
    bonus  NUMBER := 0;
  BEGIN
    IF sales > 50000 THEN
      bonus := 1500;
    ELSIF sales > 35000 THEN
      bonus := 500;
    ELSE
      bonus := 100;
    END IF;

    DBMS_OUTPUT.PUT_LINE (
      'Sales = ' || sales || ', bonus = ' || bonus || '.'
    );
  END p;
BEGIN
  p(55000);
  p(40000);
  p(30000);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
Sales = 55000, bonus = 1500.
Sales = 40000, bonus = 500.
Sales = 30000, bonus = 100.
```

Example 5-5 IF THEN ELSIF Statement Simulates Simple CASE Statement

This example uses an `IF THEN ELSIF` statement with many `ELSIF` clauses to compare a single value to many possible values. For this purpose, a simple `CASE` statement is clearer—see Example 5-6.

```
DECLARE
  grade CHAR(1);
BEGIN
  grade := 'B';

  IF grade = 'A' THEN
    DBMS_OUTPUT.PUT_LINE('Excellent');
  ELSIF grade = 'B' THEN
    DBMS_OUTPUT.PUT_LINE('Very Good');
  ELSIF grade = 'C' THEN
    DBMS_OUTPUT.PUT_LINE('Good');
  ELSIF grade = 'D' THEN
    DBMS_OUTPUT. PUT_LINE('Fair');
  ELSIF grade = 'F' THEN
    DBMS_OUTPUT.PUT_LINE('Poor');
  ELSE
    DBMS_OUTPUT.PUT_LINE('No such grade');
  END IF;
END;
/
```

Result:

```
Very Good
```

Simple CASE Statement

The simple `CASE` statement has this structure:

```
CASE selector
WHEN { selector_value_1a | dangling_predicate_1a }
    [, …, { selector_value_1n | dangling_predicate_1n }] THEN statements_1
WHEN { selector_value_2a | dangling_predicate_2a }
       [, …, { selector_value_2n | dangling_predicate_2n }] THEN statements_2
...
WHEN { selector_value_na | dangling_predicate_na }
       [, …, { selector_value_nn | dangling_predicate_nn }] THEN statements_n
[ ELSE
  else_statements ]
END CASE;
```

The *selector* is an expression (typically a single variable). Each *selector_value* can be either a literal or an expression. A *dangling_predicate* can also be used either instead of or in

Copyright © 1996, 2025, Oracle and/or its affiliates.

combination with one or multiple *selector_values*. (For complete syntax, see "CASE Statement".)

A *dangling_predicate* is an ordinary expression with its left operand missing, for example, < 2. Using a *dangling_predicate* allows for more complicated comparisons that would otherwise require a searched CASE statement.

The simple CASE statement runs the first *statements* for which *selector_value* equals *selector* or *dangling_predicate* is TRUE. Remaining conditions are not evaluated. If no *selector_value* equals *selector* and no *dangling_predicate* is TRUE, the CASE statement runs *else_statements* if they exist and raises the predefined exception CASE_NOT_FOUND otherwise.

Example 5-6 uses a simple CASE statement to compare a single value to many possible values. The CASE statement in Example 5-6 is logically equivalent to the IF THEN ELSIF statement in Example 5-5.

> **Note**
>
> As in a simple CASE expression, if the selector in a simple CASE statement has the value NULL, it cannot be matched by WHEN NULL (see Example 3-51). Instead, use a searched CASE statement with WHEN *condition* IS NULL (see Example 3-55).

Example 5-6 Simple CASE Statement

```
DECLARE
  grade CHAR(1);
BEGIN
  grade := 'B';

  CASE grade
    WHEN 'A' THEN DBMS_OUTPUT.PUT_LINE('Excellent');
    WHEN 'B' THEN DBMS_OUTPUT.PUT_LINE('Very Good');
    WHEN 'C' THEN DBMS_OUTPUT.PUT_LINE('Good');
    WHEN 'D' THEN DBMS_OUTPUT.PUT_LINE('Fair');
    WHEN 'F' THEN DBMS_OUTPUT.PUT_LINE('Poor');
    ELSE DBMS_OUTPUT.PUT_LINE('No such grade');
  END CASE;
END;
/
```

Result:

```
Very Good
```

Example 5-7 Simple CASE Statement with Dangling Predicates

```
DECLARE
  grade NUMBER;
BEGIN
  grade := '85';

  CASE grade
    WHEN < 0, > 100 THEN DBMS_OUTPUT.PUT_LINE('No such grade');
    WHEN > 89 THEN DBMS_OUTPUT.PUT_LINE('A');
    WHEN > 79 THEN DBMS_OUTPUT.PUT_LINE('B');
    WHEN > 69 THEN DBMS_OUTPUT.PUT_LINE('C');
    WHEN > 59 THEN DBMS_OUTPUT.PUT_LINE('D');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    ELSE DBMS_OUTPUT.PUT_LINE('F');
  END CASE;
END;
/
```

Result:

```
B
```

Searched CASE Statement

The searched `CASE` statement has this structure:

```
CASE
WHEN condition_1 THEN statements_1
WHEN condition_2 THEN statements_2
...
WHEN condition_n THEN statements_n
[ ELSE
  else_statements ]
END CASE;
```

The searched `CASE` statement runs the first *`statements`* for which *`condition`* is true. Remaining conditions are not evaluated. If no *`condition`* is true, the `CASE` statement runs *`else_statements`* if they exist and raises the predefined exception `CASE_NOT_FOUND` otherwise. (For complete syntax, see "CASE Statement".)

The searched `CASE` statement in Example 5-8 is logically equivalent to the simple `CASE` statement in Example 5-6.

In both Example 5-8 and Example 5-6, the `ELSE` clause can be replaced by an `EXCEPTION` part. Example 5-9 is logically equivalent to Example 5-8.

Example 5-8 Searched CASE Statement

```
DECLARE
  grade CHAR(1);
BEGIN
  grade := 'B';

  CASE
    WHEN grade = 'A' THEN DBMS_OUTPUT.PUT_LINE('Excellent');
    WHEN grade = 'B' THEN DBMS_OUTPUT.PUT_LINE('Very Good');
    WHEN grade = 'C' THEN DBMS_OUTPUT.PUT_LINE('Good');
    WHEN grade = 'D' THEN DBMS_OUTPUT.PUT_LINE('Fair');
    WHEN grade = 'F' THEN DBMS_OUTPUT.PUT_LINE('Poor');
    ELSE DBMS_OUTPUT.PUT_LINE('No such grade');
  END CASE;
END;
/
```

Result:

```
Very Good
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 5-9 EXCEPTION Instead of ELSE Clause in CASE Statement

```
DECLARE
  grade CHAR(1);
BEGIN
  grade := 'B';

  CASE
    WHEN grade = 'A' THEN DBMS_OUTPUT.PUT_LINE('Excellent');
    WHEN grade = 'B' THEN DBMS_OUTPUT.PUT_LINE('Very Good');
    WHEN grade = 'C' THEN DBMS_OUTPUT.PUT_LINE('Good');
    WHEN grade = 'D' THEN DBMS_OUTPUT.PUT_LINE('Fair');
    WHEN grade = 'F' THEN DBMS_OUTPUT.PUT_LINE('Poor');
  END CASE;
EXCEPTION
  WHEN CASE_NOT_FOUND THEN
    DBMS_OUTPUT.PUT_LINE('No such grade');
END;
/
```

Result:

```
Very Good
```

LOOP Statements

Loop statements run the same statements iteratively with a series of different values.

A `LOOP` statement has three parts:

1. An iterand, also known as a loop variable, to pass values from the loop header to the loop body
2. Iteration controls to generate values for the loop
3. A loop body run once for each value

```
loop_statement ::= [ iteration_scheme ] LOOP
                     loop_body
END LOOP [ label ];

iteration_scheme ::= WHILE expression
                   | FOR iterator
```

The loop statements are:

- Basic `LOOP`
- `FOR LOOP`
- Cursor `FOR LOOP`
- `WHILE LOOP`

The statements that exit a loop are:

- `EXIT`
- `EXIT WHEN`

Copyright © 1996, 2025, Oracle and/or its affiliates.

The statements that exit the current iteration of a loop are:

- `CONTINUE`
- `CONTINUE WHEN`

`EXIT`, `EXIT WHEN`, `CONTINUE`, and `CONTINUE WHEN` can appear anywhere inside a loop, but not outside a loop. Oracle recommends using these statements instead of the `GOTO` statement, which can exit a loop or the current iteration of a loop by transferring control to a statement outside the loop.

A raised exception also exits a loop.

`LOOP` statements can be labeled, and `LOOP` statements can be nested. Labels are recommended for nested loops to improve readability. You must ensure that the label in the `END LOOP` statement matches the label at the beginning of the same loop statement (the compiler does not check).

See Also

- GOTO Statement
- CONTINUE Statement
- "EXIT Statement"
- "Overview of Exception Handling" for information about exceptions
- "Processing Query Result Sets With Cursor FOR LOOP Statements" for information about the cursor `FOR LOOP`

Basic LOOP Statement

The basic `LOOP` statement has this structure.

With each iteration of the loop, the *`statements`* run and control returns to the top of the loop. To prevent an infinite loop, a statement or raised exception must exit the loop.

```
[ label ] LOOP
  statements
END LOOP [ label ];
```

See Also

"Basic LOOP Statement"

FOR LOOP Statement Overview

The `FOR LOOP` statement runs one or more statements for each value of the loop index.

A `FOR LOOP` header specifies the iterator. The iterator specifies an iterand and the iteration controls. The iteration control provides a sequence of values to the iterand for access in the loop body. The loop body has the statements that are processed once for each value of the iterand.

The iteration controls available are :

Copyright © 1996, 2025, Oracle and/or its affiliates.

Stepped Range An iteration control that generates a sequence of stepped numeric values. When step is not specified, the counting control is a stepped range of type pls integer with a step of one.

Single Expression An iteration control that evaluates a single expression.

Repeated Expression An iteration control that repeatedly evaluates a single expression.

Values Of An iteration control that generates all the values from a collection in sequence. The collection can be a vector valued expression, cursor, cursor variable, or dynamic SQL.

Indices Of An iteration control that generates all the indices from a collection in sequence. While all the collection types listed for values of are allowed, indices of is most useful when the collection is a vector variable.

Pairs Of An iteration control that generates all the index and value pairs from a collection. All of the collection types allowed for values of are allowed for pairs of. Pairs of iteration controls require two iterands.

Cursor An iteration control that generates all the records from a cursor, cursor variable, or dynamic SQL.

The `FOR LOOP` statement has this structure:

```
[ label ] for_loop_header
  statements
END LOOP [ label ];

for_loop_header ::= FOR iterator LOOP

iterator ::= iterand_decl [, iterand_decl] IN iteration_ctl_seq

iterand_decl  ::= pls_identifier [ MUTABLE | IMMUTABLE ] [ constrained_type ]

iteration_ctl_seq ::= qual_iteration_ctl [,]...

qual_iteration_ctl ::= [ REVERSE ] iteration_control  pred_clause_seq

iteration_control ::= stepped_control
                    | single_expression_control
                    | values_of_control
                    | indices_of_control
                    | pairs_of_control
                    | cursor_control

pred_clause_seq ::= [ stopping_pred ] [ skipping_pred ]

stopping_pred ::= WHILE boolean_expression

skipping_pred ::= WHEN boolean_expression

stepped_control ::= lower_bound .. upper_bound [ BY step ]

single_expression_control ::= [ REPEAT ] expr
```

> **See Also**
>
> "FOR LOOP Statement" for more information about syntax and semantics

Copyright © 1996, 2025, Oracle and/or its affiliates.

FOR LOOP Iterand

The index or iterand of a FOR LOOP statement is implicitly or explicitly declared as a variable that is local to the loop.

The statements in the loop can read the value of the iterand, but cannot change it. Statements outside the loop cannot reference the iterand. After the FOR LOOP statement runs, the iterand is undefined. A loop iterand is sometimes called a loop counter.

Example 5-10 FOR LOOP Statement Tries to Change Index Value

In this example, the FOR LOOP statement tries to change the value of its index, causing an error.

```
BEGIN
  FOR i IN 1..3 LOOP
    IF i < 3 THEN
      DBMS_OUTPUT.PUT_LINE (TO_CHAR(i));
    ELSE
      i := 2;
    END IF;
  END LOOP;
END;
/
```

Result:

```
       i := 2;
       *
PLS-00363: expression 'I' cannot be used as an assignment target
ORA-06550: line 6, column 8:
PL/SQL: Statement ignored
```

Example 5-11 Outside Statement References FOR LOOP Statement Index

In this example, a statement outside the FOR LOOP statement references the loop index, causing an error.

```
BEGIN
  FOR i IN 1..3 LOOP
    DBMS_OUTPUT.PUT_LINE ('Inside loop, i is ' || TO_CHAR(i));
  END LOOP;

  DBMS_OUTPUT.PUT_LINE ('Outside loop, i is ' || TO_CHAR(i));
END;
/
```

Result:

```
  DBMS_OUTPUT.PUT_LINE ('Outside loop, i is ' || TO_CHAR(i));
                                                         *
PLS-00201: identifier 'I' must be declared
ORA-06550: line 6, column 3:
PL/SQL: Statement ignored
```

Example 5-12 FOR LOOP Statement Index with Same Name as Variable

If the index of a FOR LOOP statement has the same name as a variable declared in an enclosing block, the local implicit declaration hides the other declaration, as this example shows.

```
DECLARE
  i NUMBER := 5;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  FOR i IN 1..3 LOOP
    DBMS_OUTPUT.PUT_LINE ('Inside loop, i is ' || TO_CHAR(i));
  END LOOP;

  DBMS_OUTPUT.PUT_LINE ('Outside loop, i is ' || TO_CHAR(i));
END;
/
```

Result:

```
Inside loop, i is 1
Inside loop, i is 2
Inside loop, i is 3
Outside loop, i is 5
```

Example 5-13 FOR LOOP Statement References Variable with Same Name as Index

This example shows how to change Example 5-12 to allow the statement inside the loop to reference the variable declared in the enclosing block.

```
<<main>>  -- Label block.
DECLARE
  i NUMBER := 5;
BEGIN
  FOR i IN 1..3 LOOP
    DBMS_OUTPUT.PUT_LINE (
      'local: ' || TO_CHAR(i) || ', global: ' ||
      TO_CHAR(main.i)  -- Qualify reference with block label.
    );
  END LOOP;
END main;
/
```

Result:

```
local: 1, global: 5
local: 2, global: 5
local: 3, global: 5
```

Example 5-14 Nested FOR LOOP Statements with Same Index Name

In this example, the indexes of the nested `FOR LOOP` statements have the same name. The inner loop references the index of the outer loop by qualifying the reference with the label of the outer loop. For clarity only, the inner loop also qualifies the reference to its own index with its own label.

```
BEGIN
  <<outer_loop>>
  FOR i IN 1..3 LOOP
    <<inner_loop>>
    FOR i IN 1..3 LOOP
      IF outer_loop.i = 2 THEN
        DBMS_OUTPUT.PUT_LINE
          ('outer: ' || TO_CHAR(outer_loop.i) || ' inner: '
           || TO_CHAR(inner_loop.i));
      END IF;
    END LOOP inner_loop;
  END LOOP outer_loop;
END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
outer: 2 inner: 1
outer: 2 inner: 2
outer: 2 inner: 3
```

Iterand Mutability

The mutability property of an iterand determines whether or not it can be assigned in the loop body.

If all iteration controls specified in an iterator are cursor controls, the iterand is mutable by default. Otherwise, the iterand is immutable. The default mutability property of an iterand can be changed in the iterand declaration by specifying the `MUTABLE` or `IMMUTABLE` keyword after the iterand variable.

Considerations when declaring an iterand mutable:

- Any modification to the iterand for values of iteration control or the values iterand for a pairs of iteration control will not affect the sequence of values produced by that iteration control.
- Any modification to the iterand for stepped range iteration control or repeated single expression iteration control will likely affect the behaviour of that control and the sequence of values it produces.
- When the PL/SQL compiler can determine that making an iterand mutable may adversely affect runtime performance, it may report a warning.

Multiple Iteration Controls

Multiple iteration controls may be chained together by separating them with commas.

Each iteration control has a set of controlling expressions (some controls have none) that are evaluated once when the control starts. Evaluation of these expressions or conversion of the evaluated values to the iterand type may raise exceptions. In such cases, the loop is abandoned and normal exception handling occurs. The iterand is accessible in the list of iteration controls. It is initially set to the default value for its type. If that type has a not null constraint, any reference to the iterand in the controlling expressions for the first iteration control will produce a semantic error because the iterand cannot be implicitly initialized. When an iteration control is exhausted, the iterand contains the final value assigned to it while processing that iteration control and execution advances to the next iteration control. If no values are assigned to the iterand by an iteration control, it retains the value it had prior to the start of that iteration control. If the final value of a mutable iterand is modified in the loop body, that modified value will be visible when evaluating the control expressions from the following iteration control.

Expanding Multiple Iteration Controls Into PL/SQL

The first iteration control is initialized. The loop for the first iteration control is evaluated. The controlling expressions from the next iteration control is evaluated. The loop for the second iteration control is evaluated. Each iteration control and loop is evaluated in turn until there are no more iteration controls.

Example 5-15 Using Multiple Iteration Controls

This example shows the loop variable *i* taking the value three iteration controls in succession. The value of the iterator is printed for demonstration purpose. It shows that when a loop control is exhausted, the next iteration control begins. When the last iteration control is exhausted, the loop is complete.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
   i PLS_INTEGER;
BEGIN
   FOR i IN 1..3, REVERSE i+1..i+10, 51..55 LOOP
      DBMS_OUTPUT.PUT_LINE(i);
   END LOOP;
END;
/


1
2
3
13
12
11
10
9
8
7
6
5
4
51
52
53
54
55
```

Stepped Range Iteration Controls

Stepped range iteration controls generate a sequence of numeric values.

Controlling expressions are the lower bound, upper bound, and step.

```
stepped_control ::= [ REVERSE ] lower_bound..upper_bound [ BY step ]
lower_bound ::= numeric_expression
upper_bound ::= numeric_expression
step ::= numeric_expression
```

Expanding Stepped Range Iteration Controls Into PL/SQL

When the iteration control is initialized, each controlling expression is evaluated and converted to the type of the iterand. `Step` must have a strictly positive numeric value. If any exception occurs while evaluating the controlling expressions, the loop is abandoned and normal exception handling occurs. When no step is specified, its value is one. The values generated by a stepped range iteration control go from lower bound to upper bound by step. When `REVERSE` is specified the values are decremented from the upper bound to lower bound by step. If the iterand has a floating point type, some combinations of loop control values may create an infinite loop because of rounding errors. No semantic or dynamic analysis will report this. When the iterand is mutable and is modified in the loop body, the modified value is used for the increment and loop exhaustion test in the next iterand update. This may change the sequence of values processed by the loop.

Example 5-16 FOR LOOP Statements Range Iteration Control

In this example, the `iterand` `i` has a *`lower_bound`* of 1 and an `upper_bound` of 3. The loop prints the numbers from 1 to 3.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  FOR i IN 1..3 LOOP
     DBMS_OUTPUT.PUT_LINE (i);
  END LOOP;
END;
/
```

Result:

```
1
2
3
```

Example 5-17 Reverse FOR LOOP Statements Range Iteration Control

The `FOR LOOP` statement in this example prints the numbers from 3 to 1. The loop variable *i* is implicitly declared as a `PLS_INTEGER` (the default for counting and indexing loops).

```
BEGIN
   FOR i IN REVERSE 1..3 LOOP
      DBMS_OUTPUT.PUT_LINE (i);
   END LOOP;
END;
/
```

Result:

```
3
2
1
```

Example 5-18 Stepped Range Iteration Controls

This example shows a loop variable *n* declared explicitly as a NUMBER(5,1). The increment for the counter is 0.5.

```
BEGIN
   FOR n NUMBER(5,1) IN 1.0 .. 3.0 BY 0.5 LOOP
      DBMS_OUTPUT.PUT_LINE(n);
   END LOOP;
END;
/
```

Result:

```
1
1.5
2
2.5
3
```

Example 5-19 STEP Clause in FOR LOOP Statement

In this example, the `FOR LOOP` effectively increments the index by five.

```
BEGIN
  FOR i IN 5..15 BY 5 LOOP
    DBMS_OUTPUT.PUT_LINE (i);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END LOOP;
END;
```

Result:

```
5
10
15
```

Example 5-20 Simple Step Filter Using FOR LOOP Stepped Range Iterator

This example illustrates a simple step filter. This filter is used in signal processing and other reduction applications. The predicate specifies that every Kth element of the original collection is passed to the collection being created.

```
FOR i IN start..finish LOOP
   IF (i - start) MOD k = 0 THEN
      newcol(i) := col(i)
   END IF;
END LOOP;
```

You can implement the step filter using a stepped range iterator.

```
FOR i IN start..finish BY k LOOP
   newcol(i) := col(i)
END LOOP;
```

You can implement the same filter by creating a new collection using a stepped iteration control embedded in a qualified expression.

```
newcol := col_t(FOR I IN start..finish BY k => col(i));
```

Single Expression Iteration Controls

A single expression iteration control generates a single value.

single_expression_control ::= [REPEAT] *expr*

A single expression iteration control has no controlling expressions.

When the iterand is mutable, changes made to it in the loop body will be seen when reevaluating the expression in the repeat form.

Expanding Single Expression Iteration Controls Into PL/SQL

The expression is evaluated, converted to the iterand type to create the next value. Any stopping predicate is evaluated. If it fails to evaluate to `TRUE`, the iteration control is exhausted. Any skipping predicate is evaluated. If it fails to evaluate to `TRUE`, skip the next step. Evaluate the loop body. If `REPEAT` is specified, evaluate the expression again. Otherwise, the iteration control is exhausted.

Example 5-21 Single Expression Iteration Control

This example shows the loop body being processed once.

```
BEGIN
   FOR i IN 1 LOOP
      DBMS_OUTPUT.PUT_LINE(i);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
   END LOOP;
END;
/
```

Result:

```
1
```

This example shows the iterand starting with 1, then *i*2* is evaluated repeatedly until the stopping predicate evaluates to true.

```
BEGIN
   FOR i IN 1, REPEAT i*2 WHILE i < 100 LOOP
      DBMS_OUTPUT.PUT_LINE(i);
   END LOOP;
END;
/
```

Result:

```
1
2
4
8
16
32
64
```

Collection Iteration Controls

VALUES OF, INDICES OF, and PAIRS OF iteration controls generate sequences of values for an iterand derived from a collection.

```
collection_iteration_control ::= values_of_control
                                 | indices_of_control
                                 | pairs_of_control

values_of_control ::= VALUES OF expr
                      | VALUES OF (cursor_object)
                      | VALUES OF (sql_statement)
                      | VALUES OF cursor_variable
                      | VALUES OF (dynamic_sql)

indices_of_control ::= INDICES OF expr
                       | INDICES OF (cursor_object)
                       | INDICES OF (sql_statement)
                       | INDICES OF cursor_variable
                       | INDICES OF (dynamic_sql)

pairs_of_control ::= PAIRS OF expr
                     | PAIRS OF (cursor_object)
                     | PAIRS OF (sql_statement)
                     | PAIRS OF cursor_variable
                     | PAIRS OF (dynamic_sql)
```

The collection itself is the controlling expression. The collection can be a vector value expression, a cursor object, cursor variable, or dynamic SQL. If a collection is null, it is treated as if it were defined and empty.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A *cursor_object* is an explicit PL/SQL cursor object. A *sql_statement* is an implicit PL/SQL cursor object created for a SQL statement specified directly in the iteration control. A *cursor_variable* is a PL/SQL `REF CURSOR` object.

When the iterand for a values of iteration control or the value iterand for a `VALUES OF` iteration control is modified in the loop body, those changes have no effect on the next value generated by the iteration control.

If the collection is modified in the loop body, behavior is unspecified. If a cursor variable is accessed other than through the iterand during execution of the loop body, the behavior is unspecified. Most `INDICES OF` iteration controls produce a numeric sequence unless the collection is a vector variable.

Expanding VALUES OF Iteration Controls into PL/SQL

The collection is evaluated and assigned to a vector. If the collection is empty, the iteration control is exhausted. A temporary hidden index is initialized with the index of the first element (or last element if `REVERSE` is specified). A value is fetched from the collection based on the temporary index to create the next value for the iterand. Any stopping predicate is evaluated. If it fails to evaluate to `TRUE`, the iteration control is exhausted. Any skipping predicate is evaluated. If it fails to evaluate to `TRUE`, skip the next step. Evaluate the loop body. Advance the index temporary to the index of the next element in the vector (previous element for REVERSE). Determine the next value and reiterate with each iterand value until the iteration control is exhausted.

Example 5-22 `VALUES OF` Iteration Control

This example prints the values from the collection vec: [11, 10, 34]. The iterand values of the iteration control variable *i* is the value of the first element in the vector, then the next element, and the last one.

```
DECLARE
   TYPE intvec_t IS TABLE OF PLS_INTEGER INDEX BY PLS_INTEGER;
   vec intvec_t := intvec_t(3 => 10, 1 => 11, 100 => 34);
BEGIN
   FOR i IN VALUES OF vec LOOP
      DBMS_OUTPUT.PUT_LINE(i);
   END LOOP;
END;
/
```

Result:

```
11 10 34
```

Expanding INDICES OF Iteration Controls into PL/SQL

The collection is evaluated and assigned to a vector. If the collection is empty, the iteration control is exhausted. The next value for the iterand is determined (index of the first element or last element if `REVERSE` is specified). The next value is assigned to the iterand. Any stopping predicate is evaluated. If it fails to evaluate to `TRUE`, the iteration control is exhausted. Any skipping predicate is evaluated. If it fails to evaluate to `TRUE`, skip the next step. The loop body is evaluated. Advance the iterand to the next value which is the index of the next element in the vector (previous element for `REVERSE`). Reiterate with each iterand value (assigned the index of the next or previous element) until the iteration control is exhausted.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 5-23 `INDICES OF` Iteration Control

This example prints the indices of the collection vec : [1, 3, 100]. The iterand values of the iteration control variable *i* is the index of the first element in the vector, then the next element, and the last one.

```
DECLARE
   TYPE intvec_t IS TABLE OF PLS_INTEGER INDEX BY PLS_INTEGER;
   vec intvec_t := intvec_t(3 => 10, 1 => 11, 100 => 34);
BEGIN
   FOR i IN INDICES OF vec LOOP
       DBMS_OUTPUT.PUT_LINE(i);
   END LOOP;
END;
/
```

Result:

```
1 3 100
```

Expanding PAIRS OF Iteration Controls into PL/SQL

The collection is evaluated and assigned to a vector. If the collection is empty, the iteration control is exhausted. The next index value for the iterand is determined (index of the first element or last element if `REVERSE` is specified). The next value of the element indexed by the next value is assigned to the iterand. Any stopping predicate is evaluated. If it fails to evaluate to `TRUE`, the iteration control is exhausted. Any skipping predicate is evaluated. If it fails to evaluate to `TRUE`, skip the next step. The loop body is evaluated. Advance the iterand to the next index value which is the index of the next element in the vector (previous element for `REVERSE`). Reiterate with each iterand value until the iteration control is exhausted.

Example 5-24 `PAIRS OF` Iteration Control

This example inverts a collection vec into a collection result and prints the resulting index value pairs (10 => 3, 11 => 1, 34 => 100).

```
DECLARE
   TYPE intvec_t IS TABLE OF PLS_INTEGER INDEX BY PLS_INTEGER;
   vec  intvec_t := intvec_t(3 => 10, 1 => 11, 100 => 34);
   result intvec_t;
BEGIN
   result := intvec_t(FOR i,j IN PAIRS OF vec INDEX j => i);
   FOR i,j IN PAIRS OF result LOOP
      DBMS_OUTPUT.PUT_LINE(i || '=>'|| j);
   END LOOP;
END;
/
```

Result:

```
10=>3 11=>1 34=>100
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Cursor Iteration Controls

Cursor iteration controls generate the sequence of records returned by an explicit or implicit cursor.

The cursor definition is the controlling expression. You cannot use `REVERSE` with a cursor iteration control.

```
cursor_iteration__control ::=  { cursor _object
                    | sql_statement
                    | cursor_variable
                    | dynamic_sql }
```

A *cursor_object* is an explicit PL/SQL cursor object. A *sql_statement* is an implicit PL/SQL cursor object created for a SQL statement specified directly in the iteration control. A *cursor_variable* is a PL/SQL `REF CURSOR` object. A cursor iteration control is equivalent to a `VALUES OF` iteration control whose collection is a cursor. When the iterand is modified in the loop body, it has no effect on the next value generated by the iteration control. When the collection is a cursor variable, it must be open when the iteration control is encountered or an exception will be raised. It remains open when the iteration control is exhausted. If the cursor variable is accessed other than through the iterand during execution of the loop body, the behavior is unspecified.

Expanding Cursor Iteration Controls Into PL/SQL

The cursor is evaluated to create a vector of iterands. If the vector is empty, the iteration control is exhausted. A value is fetched in the vector to create the next value for the iterand. Any stopping predicate is evaluated. If it fails to evaluate to `TRUE`, the iteration control is exhausted. Any skipping predicate is evaluated. If it fails to evaluate to `TRUE`, skip the next step. Evaluate the loop body. Reiterate the same with each iterand value fetched until the iteration control is exhausted.

Example 5-25 Cursor Iteration Controls

This example creates an associative array mapping of id to data from table t.

```
OPEN c FOR SELECT id, data FROM T;
FOR r rec_t IN c LOOP
   result(r.id) := r.data;
END LOOP;
CLOSE c;
```

Using Dynamic SQL in Iteration Controls

```
...
dynamic_sql ::= EXECUTE IMMEDIATE dynamic_sql_stmt [ using_clause ]

using_clause ::= USING [ [ IN ] (bind_argument [,])+ ]
```

Dynamic SQL may be used in a cursor or collection iteration control. Such a construct cannot provide a default type; if it is used as the first iteration control, an explicit type must be specified for the iterand (or for the value iterand for a pairs of control). The *using_clause* is the only clause allowed. No `INTO` or dynamic returning clauses may be used. If the specified SQL statement is a kind that cannot return any rows, a runtime error will be reported similar to that reported if a bulk collect into or into clause were specified on an ordinary `EXECUTE IMMEDIATE` statement.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 5-26 Using Dynamic SQL As An Iteration Control

This example shows the iteration control generates all the records from a dynamic SQL. It prints the last_name and employee_id of all employees having an employee_id less than 103. It executes the loop body when the stopping predicate is TRUE.

```
DECLARE
   cursor_str VARCHAR2(500) := 'SELECT last_name, employee_id FROM hr.employees ORDER BY
last_name';
   TYPE rec_t IS RECORD (last_name VARCHAR2(25),
                         employee_id NUMBER);
BEGIN
   FOR r rec_t IN VALUES OF (EXECUTE IMMEDIATE cursor_str) WHEN r.employee_id < 103 LOOP
      DBMS_OUTPUT.PUT_LINE(r.last_name || ', ' || r.employee_id);
   END LOOP;
END;
/
```

Result:

```
Garcia, 102
King, 100
Yang, 101
```

Example 5-27 Using Dynamic SQL As An Iteration Control In a Qualified Expression

```
v := vec_rec_t( FOR r rec_t IN (EXECUTE IMMEDIATE query_var) SEQUENCE => r);
```

Stopping and Skipping Predicate Clauses

A stopping predicate clause can cause the iteration control to be exhausted while a skipping predicate clause can cause the loop body to be skipped for some values.

The expressions in these predicate clauses are not controlling expressions.

A stopping predicate clause can cause the iteration control to be exhausted. The *boolean_expression* is evaluated at the beginning of each iteration of the loop. If it fails to evaluate to TRUE, the iteration control is exhausted.

A skipping predicate clause can cause the loop body to be skipped for some values. The *boolean_expression* is evaluated. If it fails to evaluate to TRUE, the iteration control skips to the next value.

pred_clause_seq ::= [*stopping_pred*] [*skipping_pred*]

stopping_pred ::= WHILE *boolean_expression*

skipping_pred ::= WHEN *boolean_expression*

Example 5-28 Using FOR LOOP Stopping Predicate Clause

This example shows an iteration control with a WHILE stopping predicate clause The iteration control is exhausted if the stopping predicate does not evaluate to TRUE.

```
BEGIN
   FOR power IN 1, REPEAT power*2 WHILE power <= 64 LOOP
      DBMS_OUTPUT.PUT_LINE(power);
   END LOOP;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
1
2
4
8
16
32
64
```

Example 5-29 Using FOR LOOP Skipping Predicate Clause

This example shows an iteration control with a WHEN skipping predicate clause. If the skipping predicate does not evaluate to `TRUE`, the iteration control skips to the next value.

```
BEGIN
   FOR power IN 2, REPEAT power*2 WHILE power <= 64 WHEN MOD(power, 32)= 0 LOOP
      DBMS_OUTPUT.PUT_LINE(power);
   END LOOP;
END;
/
```

Result:

```
2
32
64
```

WHILE LOOP Statement

The `WHILE LOOP` statement runs one or more statements while a condition is true.

It has this structure:

```
[ label ] WHILE condition LOOP
  statements
END LOOP [ label ];
```

If the *condition* is true, the *statements* run and control returns to the top of the loop, where *condition* is evaluated again. If the *condition* is not true, control transfers to the statement after the `WHILE LOOP` statement. To prevent an infinite loop, a statement inside the loop must make the condition false or null. For complete syntax, see "WHILE LOOP Statement".

An `EXIT`, `EXIT WHEN`, `CONTINUE`, or `CONTINUE WHEN` in the *statements* can cause the loop or the current iteration of the loop to end early.

Some languages have a `LOOP UNTIL` or `REPEAT UNTIL` structure, which tests a condition at the bottom of the loop instead of at the top, so that the statements run at least once. To simulate this structure in PL/SQL, use a basic `LOOP` statement with an `EXIT WHEN` statement:

```
LOOP
  statements
  EXIT WHEN condition;
END LOOP;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Sequential Control Statements

Unlike the `IF` and `LOOP` statements, the **sequential control statements** `GOTO` and `NULL` are not crucial to PL/SQL programming.

The `GOTO` statement, which goes to a specified statement, is seldom needed. Occasionally, it simplifies logic enough to warrant its use.

The `NULL` statement, which does nothing, can improve readability by making the meaning and action of conditional statements clear.

Topics

- GOTO Statement
- NULL Statement

GOTO Statement

The `GOTO` statement transfers control to a label unconditionally. The label must be unique in its scope and must precede an executable statement or a PL/SQL block. When run, the `GOTO` statement transfers control to the labeled statement or block.

For `GOTO` statement restrictions, see "GOTO Statement".

Use `GOTO` statements sparingly—overusing them results in code that is hard to understand and maintain. Do not use a `GOTO` statement to transfer control from a deeply nested structure to an exception handler. Instead, raise an exception. For information about the PL/SQL exception-handling mechanism, see PL/SQL Error Handling.

The `GOTO` statement transfers control to the first enclosing block in which the referenced label appears.

NULL Statement

The `NULL` statement only passes control to the next statement. Some languages refer to such an instruction as a no-op (no operation).

Some uses for the `NULL` statement are:

- To provide a target for a `GOTO` statement
- To improve readability by making the meaning and action of conditional statements clear
- To create placeholders and stub subprograms
- To show that you are aware of a possibility, but that no action is necessary

> **Note**
>
> Using the `NULL` statement might raise an `unreachable code` warning if warnings are enabled. For information about warnings, see "Compile-Time Warnings".

Example 5-30 NULL Statement Showing No Action

The `NULL` statement emphasizes that only salespersons receive commissions.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  v_job_id  VARCHAR2(10);
   v_emp_id  NUMBER(6) := 110;
BEGIN
  SELECT job_id INTO v_job_id
  FROM employees
  WHERE employee_id = v_emp_id;

  IF v_job_id = 'SA_REP' THEN
    UPDATE employees
    SET commission_pct = commission_pct * 1.2;
  ELSE
    NULL;  -- Employee is not a sales rep
  END IF;
END;
/
```

Example 5-31 NULL Statement as Placeholder During Subprogram Creation

The `NULL` statement lets you compile this subprogram and fill in the real body later.

```
CREATE OR REPLACE PROCEDURE award_bonus (
  emp_id NUMBER,
  bonus NUMBER
) AUTHID DEFINER AS
BEGIN    -- Executable part starts here
  NULL;  -- Placeholder
  -- (raises "unreachable code" if warnings enabled)
END award_bonus;
/
```

Example 5-32 NULL Statement in ELSE Clause of Simple CASE Statement

The `NULL` statement shows that you have chosen to take no action for grades other than A, B, C, D, and F.

```
CREATE OR REPLACE PROCEDURE print_grade (
  grade CHAR
) AUTHID DEFINER AS
BEGIN
  CASE grade
    WHEN 'A' THEN DBMS_OUTPUT.PUT_LINE('Excellent');
    WHEN 'B' THEN DBMS_OUTPUT.PUT_LINE('Very Good');
    WHEN 'C' THEN DBMS_OUTPUT.PUT_LINE('Good');
    WHEN 'D' THEN DBMS_OUTPUT.PUT_LINE('Fair');
    WHEN 'F' THEN DBMS_OUTPUT.PUT_LINE('Poor');
    ELSE NULL;
  END CASE;
END;
/
BEGIN
  print_grade('A');
  print_grade('S');
END;
/
```

Result:

```
Excellent
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

6

PL/SQL Collections and Records

PL/SQL lets you define two kinds of composite data types: collection and record.

A **composite data type** stores values that have internal components. You can pass entire composite variables to subprograms as parameters, and you can access internal components of composite variables individually. Internal components can be either scalar or composite. You can use scalar components wherever you can use scalar variables. You can use composite components wherever you can use composite variables of the same type.

> **Note**
>
> If you pass a composite variable as a parameter to a remote subprogram, then you must create a redundant loop-back `DATABASE LINK`, so that when the remote subprogram compiles, the type checker that verifies the source uses the same definition of the user-defined composite variable type as the invoker uses.

In a **collection**, the internal components always have the same data type, and are called **elements**. You can access each element of a collection variable by its unique index, with this syntax: *`variable_name`*`(`*`index`*`)`. To create a collection variable, you either define a collection type and then create a variable of that type or use `%TYPE`.

In a **record**, the internal components can have different data types, and are called **fields**. You can access each field of a record variable by its name, with this syntax: *`variable_name.field_name`*. To create a record variable, you either define a `RECORD` type and then create a variable of that type or use `%ROWTYPE` or `%TYPE`.

You can create a collection of records, and a record that contains collections.

Collection Topics

- Collection Types
- Associative Arrays
- Varrays (Variable-Size Arrays)
- Nested Tables
- Collection Constructors
- Qualified Expressions Overview
- Assigning Values to Collection Variables
- Multidimensional Collections
- Collection Comparisons
- Collection Methods
- Collection Types Defined in Package Specifications

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database SQL Language Reference* for information about the `CREATE DATABASE LINK` statement
- "Querying a Collection"
- "BULK COLLECT Clause" for information about retrieving query results into a collection
- "Collection Variable Declaration" for syntax and semantics of collection type definition and collection variable declaration

Record Topics

- Record Variables
- Assigning Values to Record Variables
- Record Comparisons
- Inserting Records into Tables
- Updating Rows with Records
- Restrictions on Record Inserts and Updates

Note

The components of an explicitly listed composite data structure (such as a collection constructor or record initializer) can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.

Collection Types

PL/SQL has three collection types—associative array, `VARRAY` (variable-size array), and nested table.

Table 6-1 summarizes their similarities and differences.

Table 6-1 PL/SQL Collection Types

Collection Type	Number of Elements	Index Type	Dense or Sparse	Uninitialized Status	Where Defined	Can Be ADT Attribute Data Type
Associative array (or index-by table)	Unspecified	String or `PLS_INTEGER`	Either	Empty	In PL/SQL block or package	No
VARRAY (variable-size array)	Specified	Integer	Always dense	Null	In PL/SQL block or package or at schema level	Only if defined at schema level

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 6-1 (Cont.) PL/SQL Collection Types

Collection Type	Number of Elements	Index Type	Dense or Sparse	Uninitialized Status	Where Defined	Can Be ADT Attribute Data Type
Nested table	Unspecified	Integer	Starts dense, can become sparse	Null	In PL/SQL block or package or at schema level	Only if defined at schema level

Number of Elements

If the number of elements is specified, it is the maximum number of elements in the collection. If the number of elements is unspecified, the maximum number of elements in the collection is the upper limit of the index type.

Dense or Sparse

A **dense collection** has no gaps between elements—every element between the first and last element is defined and has a value (the value can be `NULL` unless the element has a `NOT NULL` constraint). A **sparse collection** has gaps between elements.

Uninitialized Status

An **empty collection** exists but has no elements. To add elements to an empty collection, invoke the `EXTEND` method (described in "EXTEND Collection Method").

A **null collection** (also called an **atomically null collection**) does not exist. To change a null collection to an existing collection, you must initialize it, either by making it empty or by assigning a non-`NULL` value to it (for details, see "Collection Constructors" and "Assigning Values to Collection Variables"). You cannot use the `EXTEND` method to initialize a null collection.

Where Defined

A collection type defined in a PL/SQL block is a **local type**. It is available only in the block, and is stored in the database only if the block is in a standalone or package subprogram. (Standalone and package subprograms are explained in "Nested, Package, and Standalone Subprograms".)

A collection type defined in a package specification is a **public item**. You can reference it from outside the package by qualifying it with the package name (*`package_name.type_name`*). It is stored in the database until you drop the package. (Packages are explained in PL/SQL Packages.)

A collection type defined at schema level is a **standalone type**. You create it with the "CREATE TYPE Statement". It is stored in the database until you drop it with the "DROP TYPE Statement".

> **Note**
>
> A collection type defined in a package specification is incompatible with an identically defined local or standalone collection type (see Example 6-37 and Example 6-38).

Copyright © 1996, 2025, Oracle and/or its affiliates.

Can Be ADT Attribute Data Type

To be an ADT attribute data type, a collection type must be a standalone collection type. For other restrictions, see **Restrictions on *datatype***.

Translating Non-PL/SQL Composite Types to PL/SQL Composite Types

If you have code or business logic that uses another language, you can usually translate the array and set types of that language directly to PL/SQL collection types. For example:

Non-PL/SQL Composite Type	Equivalent PL/SQL Composite Type
Hash table	Associative array
Unordered table	Associative array
Set	Nested table
Bag	Nested table
Array	`VARRAY`

See Also

Oracle Database SQL Language Reference for information about the `CAST` function, which converts one SQL data type or collection-typed value into another SQL data type or collection-typed value.

Associative Arrays

An **associative array** (formerly called **PL/SQL table** or **index-by table**) is a set of key-value pairs. Each key is a unique index, used to locate the associated value with the syntax *`variable_name`*`(`*`index`*`)`.

The data type of *`index`* can be either a string type (`VARCHAR2`, `VARCHAR`, `STRING`, or `LONG`) or `PLS_INTEGER`. Indexes are stored in sort order, not creation order. For string types, sort order is determined by the initialization parameters `NLS_SORT` and `NLS_COMP`.

Like a database table, an associative array:

- Is empty (but not null) until you populate it
- Can hold an unspecified number of elements, which you can access without knowing their positions

Unlike a database table, an associative array:

- Does not need disk space or network operations
- Cannot be manipulated with DML statements

Topics

- Declaring Associative Array Constants
- NLS Parameter Values Affect Associative Arrays Indexed by String
- Appropriate Uses for Associative Arrays

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - Table 6-1 for a summary of associative array characteristics
> - "*assoc_array_type_def* ::=" for the syntax of an associative array type definition

Example 6-1 Associative Array Indexed by String

This example defines a type of associative array indexed by string, declares a variable of that type, populates the variable with three elements, changes the value of one element, and prints the values (in sort order, not creation order). (`FIRST` and `NEXT` are collection methods, described in "Collection Methods".)

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Associative Array Indexed by String

```
DECLARE
  -- Associative array indexed by string:

  TYPE population IS TABLE OF NUMBER  -- Associative array type
    INDEX BY VARCHAR2(64);            -- Indexed by string

  city_population  population;        -- Associative array variable
  i  VARCHAR2(64);                    -- Scalar variable

BEGIN
  -- Add elements (key-value pairs) to associative array:

  city_population('Smallville')  := 2000;
  city_population('Midland')     := 750000;
  city_population('Megalopolis') := 1000000;

  -- Change value associated with key 'Smallville':

  city_population('Smallville') := 2001;

  -- Print associative array:

  i := city_population.FIRST;  -- Get first element of array

  WHILE i IS NOT NULL LOOP
    DBMS_Output.PUT_LINE
      ('Population of ' || i || ' is ' || city_population(i));
    i := city_population.NEXT(i);  -- Get next element of array
  END LOOP;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Population of Megalopolis is 1000000
Population of Midland is 750000
Population of Smallville is 2001
```

Example 6-2 Function Returns Associative Array Indexed by PLS_INTEGER

This example defines a type of associative array indexed by `PLS_INTEGER` and a function that returns an associative array of that type.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Function Returns Associative Array Indexed by PLS_INTEGER

```
DECLARE
  TYPE sum_multiples IS TABLE OF PLS_INTEGER INDEX BY PLS_INTEGER;
  n  PLS_INTEGER := 5;   -- number of multiples to sum for display
  sn PLS_INTEGER := 10;  -- number of multiples to sum
  m  PLS_INTEGER := 3;   -- multiple

  FUNCTION get_sum_multiples (
    multiple IN PLS_INTEGER,
    num      IN PLS_INTEGER
  ) RETURN sum_multiples
  IS
    s sum_multiples;
  BEGIN
    FOR i IN 1..num LOOP
      s(i) := multiple * ((i * (i + 1)) / 2);  -- sum of multiples
    END LOOP;
    RETURN s;
  END get_sum_multiples;

BEGIN
  DBMS_OUTPUT.PUT_LINE (
    'Sum of the first ' || TO_CHAR(n) || ' multiples of ' ||
    TO_CHAR(m) || ' is ' || TO_CHAR(get_sum_multiples (m, sn)(n))
  );
END;
/
```

Result:

```
Sum of the first 5 multiples of 3 is 45
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Declaring Associative Array Constants

When declaring an associative array constant, you can use qualified expressions to initialize the associative array with its initial values in a compact form.

For information about constructors, see "Collection Constructors".

Example 6-3 Declaring Associative Array Constant

You can use a qualified expression indexed association aggregate to initialize a constant associative array index expression and value expression.

```
DECLARE
  TYPE My_AA IS TABLE OF VARCHAR2(20) INDEX BY PLS_INTEGER;
  v CONSTANT My_AA := My_AA(-10=>'-ten', 0=>'zero', 1=>'one', 2=>'two', 3 =>
'three', 4 => 'four', 9 => 'nine');
BEGIN
  DECLARE
    Idx PLS_INTEGER := v.FIRST();
  BEGIN
    WHILE Idx IS NOT NULL LOOP
      DBMS_OUTPUT.PUT_LINE(TO_CHAR(Idx, '999')||LPAD(v(Idx), 7));
      Idx := v.NEXT(Idx);
    END LOOP;
  END;
END;
/
```

Prior to Oracle Database Release 18c, to achieve the same result, you had to create the function for the associative array constructor. You can observe by comparing both examples that qualified expressions improve program clarity and developer productivity by being more compact.

Live SQL

You can view and run this example on Oracle Live SQL at Declaring Associative Array Constant

```
CREATE OR REPLACE PACKAGE My_Types AUTHID CURRENT_USER IS
  TYPE My_AA IS TABLE OF VARCHAR2(20) INDEX BY PLS_INTEGER;
  FUNCTION Init_My_AA RETURN My_AA;
END My_Types;
/
CREATE OR REPLACE PACKAGE BODY My_Types IS
  FUNCTION Init_My_AA RETURN My_AA IS
    Ret My_AA;
  BEGIN
    Ret(-10) := '-ten';
    Ret(0) := 'zero';
    Ret(1) := 'one';
    Ret(2) := 'two';
    Ret(3) := 'three';
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    Ret(4) := 'four';
    Ret(9) := 'nine';
    RETURN Ret;
  END Init_My_AA;
END My_Types;
/
DECLARE
  v CONSTANT My_Types.My_AA := My_Types.Init_My_AA();
BEGIN
  DECLARE
    Idx PLS_INTEGER := v.FIRST();
  BEGIN
    WHILE Idx IS NOT NULL LOOP
      DBMS_OUTPUT.PUT_LINE(TO_CHAR(Idx, '999')||LPAD(v(Idx), 7));
      Idx := v.NEXT(Idx);
    END LOOP;
  END;
END;
/
```

Result:

```
-10   -ten
0   zero
1    one
2    two
3  three
4   four
9   nine
```

NLS Parameter Values Affect Associative Arrays Indexed by String

National Language Support (NLS) parameters such as `NLS_SORT`, `NLS_COMP`, and `NLS_DATE_FORMAT` affect associative arrays indexed by string.

Topics

- Changing NLS Parameter Values After Populating Associative Arrays
- Indexes of Data Types Other Than VARCHAR2
- Passing Associative Arrays to Remote Databases

> **See Also**
>
> *Oracle Database Globalization Support Guide* for information about linguistic sort parameters

Copyright © 1996, 2025, Oracle and/or its affiliates.

Changing NLS Parameter Values After Populating Associative Arrays

The initialization parameters NLS_SORT and NLS_COMP determine the storage order of string indexes of an associative array.

If you change the value of either parameter after populating an associative array indexed by string, then the collection methods FIRST, LAST, NEXT, and PRIOR might return unexpected values or raise exceptions. If you must change these parameter values during your session, restore their original values before operating on associative arrays indexed by string.

> **See Also**
>
> Collection Methods for more information about FIRST, LAST, NEXT, and PRIOR

Indexes of Data Types Other Than VARCHAR2

In the declaration of an associative array indexed by string, the string type must be VARCHAR2 or one of its subtypes.

However, you can populate the associative array with indexes of any data type that the TO_CHAR function can convert to VARCHAR2.

If your indexes have data types other than VARCHAR2 and its subtypes, ensure that these indexes remain consistent and unique if the values of initialization parameters change. For example:

- Do not use TO_CHAR(SYSDATE) as an index.

  If the value of NLS_DATE_FORMAT changes, then the value of (TO_CHAR(SYSDATE)) might also change.
- Do not use different NVARCHAR2 indexes that might be converted to the same VARCHAR2 value.
- Do not use CHAR or VARCHAR2 indexes that differ only in case, accented characters, or punctuation characters.

  If the value of NLS_SORT ends in _CI (case-insensitive comparisons) or _AI (accent- and case-insensitive comparisons), then indexes that differ only in case, accented characters, or punctuation characters might be converted to the same value.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about TO_CHAR

Passing Associative Arrays to Remote Databases

If you pass an associative array as a parameter to a remote database, and the local and the remote databases have different NLS_SORT or NLS_COMP values, then:

- The collection method FIRST, LAST, NEXT or PRIOR (described in "Collection Methods") might return unexpected values or raise exceptions.
- Indexes that are unique on the local database might not be unique on the remote database, raising the predefined exception VALUE_ERROR.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Appropriate Uses for Associative Arrays

An associative array is appropriate for:

- A relatively small lookup table, which can be constructed in memory each time you invoke the subprogram or initialize the package that declares it
- Passing collections to and from the database server

  Declare formal subprogram parameters of associative array types. With Oracle Call Interface (OCI) or an Oracle precompiler, bind the host arrays to the corresponding actual parameters. PL/SQL automatically converts between host arrays and associative arrays indexed by `PLS_INTEGER`.

> **Note**
>
> You cannot bind an associative array indexed by `VARCHAR`.

> **Note**
>
> You cannot declare an associative array type at schema level. Therefore, to pass an associative array variable as a parameter to a standalone subprogram, you must declare the type of that variable in a package specification. Doing so makes the type available to both the invoked subprogram (which declares a formal parameter of that type) and the invoking subprogram or anonymous block (which declares and passes the variable of that type). See Example 11-2.

> **Tip**
>
> The most efficient way to pass collections to and from the database server is to use associative arrays with the `FORALL` statement or `BULK COLLECT` clause. For details, see "FORALL Statement" and "BULK COLLECT Clause".

An associative array is intended for temporary data storage. To make an associative array persistent for the life of a database session, declare it in a package specification and populate it in the package body.

Varrays (Variable-Size Arrays)

A **varray (variable-size array)** is an array whose number of elements can vary from zero (empty) to the declared maximum size.

To access an element of a varray variable, use the syntax *`variable_name`*`(`*`index`*`)`. The lower bound of *`index`* is 1; the upper bound is the current number of elements. The upper bound changes as you add or delete elements, but it cannot exceed the maximum size. When you store and retrieve a varray from the database, its indexes and element order remain stable.

Figure 6-1 shows a varray variable named `Grades`, which has maximum size 10 and contains seven elements. `Grades`(*n*) references the *n*th element of `Grades`. The upper bound of `Grades` is 7, and it cannot exceed 10.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Figure 6-1 Varray of Maximum Size 10 with 7 Elements



The database stores a varray variable as a single object. If a varray variable is less than 4 KB, it resides inside the table of which it is a column; otherwise, it resides outside the table but in the same tablespace.

An uninitialized varray variable is a null collection. You must initialize it, either by making it empty or by assigning a non-`NULL` value to it. For details, see "Collection Constructors" and "Assigning Values to Collection Variables".

Topics

- Appropriate Uses for Varrays

> **See Also**
>
> - Table 6-1 for a summary of varray characteristics
> - "*varray_type_def* ::=" for the syntax of a `VARRAY` type definition
> - "CREATE TYPE Statement" for information about creating standalone `VARRAY` types
> - *Oracle Database SQL Language Reference* for more information about varrays

Example 6-4 Varray (Variable-Size Array)

This example defines a local `VARRAY` type, declares a variable of that type (initializing it with a constructor), and defines a procedure that prints the varray. The example invokes the procedure three times: After initializing the variable, after changing the values of two elements individually, and after using a constructor to the change the values of all elements. (For an example of a procedure that prints a varray that might be null or empty, see Example 6-30.)

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Varray (Variable-Size Array)

```
DECLARE
  TYPE Foursome IS VARRAY(4) OF VARCHAR2(15);  -- VARRAY type

  -- varray variable initialized with constructor:

  team Foursome := Foursome('John', 'Mary', 'Alberto', 'Juanita');

  PROCEDURE print_team (heading VARCHAR2) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(heading);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    FOR i IN 1..4 LOOP
      DBMS_OUTPUT.PUT_LINE(i || '.' || team(i));
    END LOOP;

    DBMS_OUTPUT.PUT_LINE('---');
  END;

BEGIN
  print_team('2001 Team:');

  team(3) := 'Pierre';  -- Change values of two elements
  team(4) := 'Yvonne';
  print_team('2005 Team:');

  -- Invoke constructor to assign new values to varray variable:

  team := Foursome('Arun', 'Amitha', 'Allan', 'Mae');
  print_team('2009 Team:');
END;
/
```

Result:

```
2001 Team:
1.John
2.Mary
3.Alberto
4.Juanita
---
2005 Team:
1.John
2.Mary
3.Pierre
4.Yvonne
---
2009 Team:
1.Arun
2.Amitha
3.Allan
4.Mae
---
```

Appropriate Uses for Varrays

A varray is appropriate when:

- You know the maximum number of elements.
- You usually access the elements sequentially.

Because you must store or retrieve all elements at the same time, a varray might be impractical for large numbers of elements.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Nested Tables

In the database, a **nested table** is a column type that stores an unspecified number of rows in no particular order.

When you retrieve a nested table value from the database into a PL/SQL nested table variable, PL/SQL gives the rows consecutive indexes, starting at 1. Using these indexes, you can access the individual rows of the nested table variable. The syntax is *`variable_name`*`(`*`index`*`)`. The indexes and row order of a nested table might not remain stable as you store and retrieve the nested table from the database.

The amount of memory that a nested table variable occupies can increase or decrease dynamically, as you add or delete elements.

An uninitialized nested table variable is a null collection. You must initialize it, either by making it empty or by assigning a non-`NULL` value to it. For details, see "Collection Constructors" and "Assigning Values to Collection Variables".

> **Note**
>
> Example 6-23, Example 6-25, and Example 6-26 reuse `nt_type` and `print_nt`.

Topics

- Important Differences Between Nested Tables and Arrays
- Appropriate Uses for Nested Tables

> **See Also**
>
> - Table 6-1 for a summary of nested table characteristics
> - "*nested_table_type_def* ::=" for the syntax of a nested table type definition
> - "CREATE TYPE Statement" for information about creating standalone nested table types
> - "INSTEAD OF DML Triggers" for information about triggers that update nested table columns of views
> - *Oracle Database SQL Language Reference* for more information about nested tables

Example 6-5 Nested Table of Local Type

This example defines a local nested table type, declares a variable of that type (initializing it with a constructor), and defines a procedure that prints the nested table. (The procedure uses the collection methods `FIRST` and `LAST`, described in "Collection Methods".) The example invokes the procedure three times: After initializing the variable, after changing the value of one element, and after using a constructor to the change the values of all elements. After the second constructor invocation, the nested table has only two elements. Referencing element 3 would raise error ORA-06533.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Live SQL

You can view and run this example on Oracle Live SQL at Nested Table of Local Type

```
DECLARE
  TYPE Roster IS TABLE OF VARCHAR2(15);  -- nested table type

  -- nested table variable initialized with constructor:

  names Roster := Roster('D Caruso', 'J Hamil', 'D Piro', 'R Singh');

  PROCEDURE print_names (heading VARCHAR2) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(heading);

    FOR i IN names.FIRST .. names.LAST LOOP  -- For first to last element
      DBMS_OUTPUT.PUT_LINE(names(i));
    END LOOP;

    DBMS_OUTPUT.PUT_LINE('---');
  END;

BEGIN
  print_names('Initial Values:');

  names(3) := 'P Perez';  -- Change value of one element
  print_names('Current Values:');

  names := Roster('A Jansen', 'B Gupta');  -- Change entire table
  print_names('Current Values:');
END;
/
```

Result:

```
Initial Values:
D Caruso
J Hamil
D Piro
R Singh
---
Current Values:
D Caruso
J Hamil
P Perez
R Singh
---
Current Values:
A Jansen
B Gupta
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-6 Nested Table of Standalone Type

This example defines a standalone nested table type, `nt_type`, and a standalone procedure to print a variable of that type, `print_nt`. An anonymous block declares a variable of type `nt_type`, initializing it to empty with a constructor, and invokes `print_nt` twice: After initializing the variable and after using a constructor to the change the values of all elements.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Nested Table of Standalone Type

```
CREATE OR REPLACE TYPE nt_type IS TABLE OF NUMBER;
/
CREATE OR REPLACE PROCEDURE print_nt (nt nt_type) AUTHID DEFINER IS
  i  NUMBER;
BEGIN
  i := nt.FIRST;

  IF i IS NULL THEN
    DBMS_OUTPUT.PUT_LINE('nt is empty');
  ELSE
    WHILE i IS NOT NULL LOOP
      DBMS_OUTPUT.PUT('nt.(' || i || ') = ');
      DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(nt(i)), 'NULL'));
      i := nt.NEXT(i);
    END LOOP;
  END IF;

  DBMS_OUTPUT.PUT_LINE('---');
END print_nt;
/
DECLARE
  nt nt_type := nt_type();  -- nested table variable initialized to empty
BEGIN
  print_nt(nt);
  nt := nt_type(90, 9, 29, 58);
  print_nt(nt);
END;
/
```

Result:

```
nt is empty
---
nt.(1) = 90
nt.(2) = 9
nt.(3) = 29
nt.(4) = 58
---
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Important Differences Between Nested Tables and Arrays

Conceptually, a nested table is like a one-dimensional array with an arbitrary number of elements. However, a nested table differs from an array in these important ways:

- An array has a declared number of elements, but a nested table does not. The size of a nested table can increase dynamically.
- An array is always dense. A nested array is dense initially, but it can become sparse, because you can delete elements from it.

Figure 6-2 shows the important differences between a nested table and an array.

Figure 6-2 Array and Nested Table

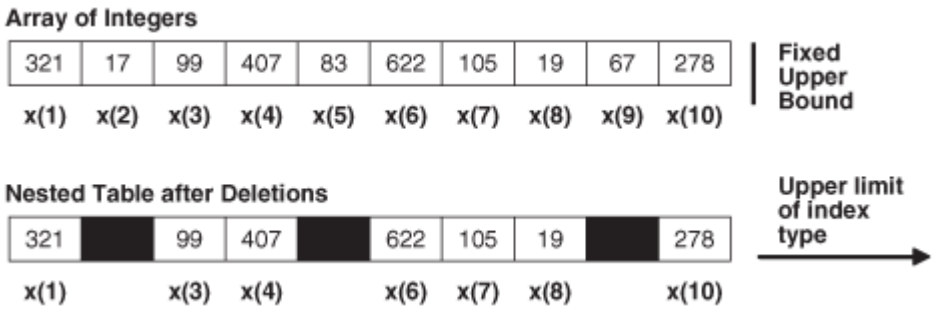

Appropriate Uses for Nested Tables

A nested table is appropriate when:

- The number of elements is not set.
- Index values are not consecutive.
- You must delete or update some elements, but not all elements simultaneously.

  Nested table data is stored in a separate store table, a system-generated database table. When you access a nested table, the database joins the nested table with its store table. This makes nested tables suitable for queries and updates that affect only some elements of the collection.
- You would create a separate lookup table, with multiple entries for each row of the main table, and access it through join queries.

Collection Constructors

A **collection constructor (constructor)** is a system-defined function with the same name as a collection type, which returns a collection of that type.

> **Note**
>
> This topic applies only to varrays and nested tables. In this topic, *collection* means *varray or nested table*. Associative arrays use qualified expressions and aggregates (see Qualified Expressions Overview).

Copyright © 1996, 2025, Oracle and/or its affiliates.

The syntax of a constructor invocation is:

```
collection_type ( [ value [, value ]... ] )
```

If the parameter list is empty, the constructor returns an empty collection. Otherwise, the constructor returns a collection that contains the specified values. For semantic details, see "*collection_constructor*".

You can assign the returned collection to a collection variable (of the same type) in the variable declaration and in the executable part of a block.

Example 6-7 Initializing Collection (Varray) Variable to Empty

This example invokes a constructor twice: to initialize the varray variable `team` to empty in its declaration, and to give it new values in the executable part of the block. The procedure `print_team` shows the initial and final values of `team`. To determine when `team` is empty, `print_team` uses the collection method `COUNT`, described in "Collection Methods". (For an example of a procedure that prints a varray that might be null, see Example 6-30.)

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Initializing Collection (Varray) Variable to Empty

```
DECLARE
  TYPE Foursome IS VARRAY(4) OF VARCHAR2(15);
  team Foursome := Foursome();  -- initialize to empty

  PROCEDURE print_team (heading VARCHAR2)
  IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(heading);

    IF team.COUNT = 0 THEN
      DBMS_OUTPUT.PUT_LINE('Empty');
    ELSE
      FOR i IN 1..4 LOOP
        DBMS_OUTPUT.PUT_LINE(i || '.' || team(i));
      END LOOP;
    END IF;

    DBMS_OUTPUT.PUT_LINE('---');
  END;

BEGIN
  print_team('Team:');
  team := Foursome('John', 'Mary', 'Alberto', 'Juanita');
  print_team('Team:');
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Team:
Empty
---
Team:
1.John
2.Mary
3.Alberto
4.Juanita
---
```

Qualified Expressions Overview

Qualified expressions improve program clarity and developer productivity by providing the ability to declare and define a complex value in a compact form where the value is needed.

A qualified expression combines expression elements to create values of almost any type. They are most useful for records, associative arrays, nested tables, and variable arrays .

Qualified expressions use an explicit type indication to provide the type of the qualified item. This explicit indication is known as a `typemark`.

Qualified expressions have this structure:

```
qualified_expression ::= empty_qualified_expression
                       | simple_qualified_expression
                       | aggregate_qualified_expression
typemark ::= type_name
type_name ::= identifier
              | type_name . identifier
empty_qualified_expression ::= typemark ( )
simple_qualified_expression ::= typemark ( expr )
aggregate_qualified_expression ::= typemark ( aggregate )

aggregate ::= [ positional_choice_list ] [ explicit_choice_list ] [ others_choice ]

positional_choice_list ::= ( expr )+
                         | sequence_iterator_choice

sequence_iterator_choice ::= FOR iterator SEQUENCE => expr

explicit_choice_list ::= named_choice_list
                       | indexed_choice_list
                       | iterator_choice
                       | index_iterator_choice

named_choice_list ::= identifier => expr [,]+

indexed_choice_list ::= expr => expr [,] +

iterator_choice ::= FOR iterator => expr

index_iterator_choice ::= FOR iterator INDEX expr => expr

others_choice ::= OTHERS => expr
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

See "*qualified_expression ::=*" for more information about the syntax and semantics.

Empty Qualified Expressions

An empty qualified expression has the form *typemark ( )*. For example, the expression T ( ) where T is a typemark, provides a new value as defined by the declaration of type T. In PL/SQL, all types define an initialization for their values, sometimes, it is simply `NULL`. When the typemark includes constraints, the value of the qualified expression is required to honor those constraints, or an exception is raised.

Simple Qualified Expressions

A simple qualified expression has the form *typemark (expr)* where *expr* is an expression that produces a single value, not necessarily a scalar value.

Aggregate Qualified Expressions

An aggregate qualified expression has the form *typemark (aggregate)*. For example, given T is a typemark of a compound type, it looks like T(C1, C2, ..., Cn) where each of the C's is a choice that describes some elements of type T.

A positional choice contains only an initializing expression *expr*. If an aggregate contains positional choices, they must appear before any other choices. Positional choices may only be used with structured types and lower bounded vector types.

A named choice has the form N1 | N2 | ... | Nn => *expr* where there may be only one name and where the names Ni are field names from the structured type T. Named choices may only be used with structured types.

An indexed choice has the form I => *expr* where index I is a numeric or varchar2 expression. Indexed choices may only be used with vector types.

An iterator choice has the form F..L =>*expr* where there where F and L are each numeric expressions. The bounds follow the same rules as used for the bounds of a for loop. Iterator choices may only be used with vector types and they may not be used with unbounded vector types that have a varchar2 index type.

Indexed and iterator choices may be intermixed freely, including by alternation as in I1 | F2..L2 | .. | In => *expr*.

An others choice has the form `OTHERS` => *expr* and must appear last if it appears at all.. An others choice may only be used with structured types and bounded vector types.

Positional choices must precede explicit choices which must precede the others choice if it appears.

An alternation index or iterator choice has the form I1 | F2..L2 | ... | In => *expr* and has the same effect as the collection of single index and iterator choices I1 => *expr*, F2..L2 => *expr*, ..., In => *expr*.

This example shows different methods to assign values to a record with the same results.

```
DECLARE
  TYPE t_rec IS RECORD (
    id   NUMBER,
    val1 VARCHAR2(10),
    val2 VARCHAR2(10),
    val3 VARCHAR2(10)  );
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  l_rec t_rec;
BEGIN
  -- Method 1: Direct assignment to record fields (not using aggregate).
  l_rec.id   := 1;
  l_rec.val1 := 'ONE';
  l_rec.val2 := 'TWO';
  l_rec.val3 := 'THREE';

  -- Method 2 : Using aggregate qualified expression positional association
  l_rec := t_rec(1, 'ONE', 'TWO', 'THREE');

  -- Method 3 : Using aggregate qualified expression named association
  l_rec := t_rec(id   => 1, val1 => 'ONE', val2 => 'TWO', val3 => 'THREE');
END;
/
```

Iterator Choice Association

The iterator choice association uses the iterand as an index.

For each iterand value, the expression is evaluated and added to the collection using the iterand value as the index.

For each value of iterand generated by the iteration controls:

1. Evaluate the expression producing an expression value.
2. If appropriate for the collection type, extend the collection to the index specified by the iterand.
3. Add the expression value to the collection at the index specified by the iterand value.

Example 6-8 Iterator Choice Association in Qualified Expressions

This example creates a vector of the first N fibonacci numbers.

```
result := vec_t (FOR i IN 1..n => fib(i));
```

This example creates a vector of the first N even numbers.

```
result := vec_t (FOR i IN 1..n => 2*i);
```

Index Iterator Choice Association

The index iterator choice association provides an index expression along with the value expression.

For each iterand value, the index expression and value expression are evaluated. Then the expanded value is added to the collection using the expanded index.

For each value of iterand generated by the iteration controls:

1. Evaluate the expression producing an expression value.
2. Evaluate the index expression producing an index value.
3. If appropriate for the collection type, extend the collection to the index specified by the index value.

Copyright © 1996, 2025, Oracle and/or its affiliates.

4. Add the expression value to the collection at the index specified by the index value.

Example 6-9 Index Iterator Choice Association in Qualified Expressions

This example creates a copy of vec with values incremented by N.

```
result := vec_t (FOR I,j IN PAIRS OF vec INDEX I => j+n);
```

This example creates a vector of the first N even numbers.

```
result := vec_t (FOR i IN 2..n BY 2 INDEX i/2 => i);
```

Sequence Iterator Choice Association

The sequence iterator choice association allows a sequence of values to be added to the end of a collection. In each case, the expressions specified may reference the iterands.

For each iterand value, the value expression is evaluated and added to the end of the collection.

For each value of iterand generated by the iteration controls:

1. Evaluate the expression producing an expression value.
2. If appropriate for the collection type, extend the collection by one.
3. Add the expression value to the collection at its end.

Example 6-10 Sequence Iterator Choice Association in Qualified Expressions

This example concatenates vectors v1 and reversed v2 together.

```
result := vec_t (FOR v IN VALUES OF v1,
                          REVERSE VALUES OF v2
                 SEQUENCE => v);
```

This example creates a vector of the prime numbers less than or equal to N.

```
result := vec_t (FOR i IN 1..n WHEN is_prime(i)
                 SEQUENCE => i);
```

Example 6-11 Assigning Values to Associative Array Type Variables Using Qualified Expressions

This example uses a function to display the values of a table of `BOOLEAN`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at "18c Assigning Values to Associative Array Type Variables Using Qualified Expressions"

```
CREATE FUNCTION print_bool (v IN BOOLEAN)
  RETURN VARCHAR2
IS
  v_rtn VARCHAR2(10);
BEGIN
  CASE v
  WHEN TRUE THEN
    v_rtn := 'TRUE';
  WHEN FALSE THEN
    v_rtn := 'FALSE';
  ELSE
    v_rtn := 'NULL';
  END CASE;
  RETURN v_rtn;
END print_bool;
/
```

The variable v_aa1 is initialized using index key-value pairs.

```
DECLARE
  TYPE t_aa IS TABLE OF BOOLEAN INDEX BY PLS_INTEGER;
  v_aa1 t_aa := t_aa(1=>FALSE,
                     2=>TRUE,
                     3=>NULL);
BEGIN
  DBMS_OUTPUT.PUT_LINE(print_bool(v_aa1(1)));
  DBMS_OUTPUT.PUT_LINE(print_bool(v_aa1(2)));
  DBMS_OUTPUT.PUT_LINE(print_bool(v_aa1(3)));
END;
/
```

Result:

```
FALSE
TRUE
NULL
```

Example 6-12 Assigning values to a RECORD Type Variables using Qualified Expressions

This example shows a record of values assigned using a qualified expression. The value for rec.a is assigned using the position notation, the value for rec.c uses the named association

Copyright © 1996, 2025, Oracle and/or its affiliates.

and rec.b is assigned a value of 2 since it is not defined by the position and named association, it falls in the other notation.

```
DECLARE
  TYPE r IS RECORD(a PLS_INTEGER, b PLS_INTEGER, c NUMBER);
  rec r;
BEGIN
  rec := r(1, c => 3.0, OTHERS => 2);
-- rec contains [ 1, 2, 3.0 ]
END;
/
```

Example 6-13 Assigning Values to a VARRAY Type using Qualified Expressions

In this example, the variable array vec contains [1, 3, 2, 3] .

```
DECLARE
  TYPE v IS VARRAY(4) OF NUMBER;
  vec v;
BEGIN
  vec := v(1, 3 => 2, OTHERS => 3);
END;
/
```

Assigning Values to Collection Variables

You can assign a value to a collection variable in these ways:

- Invoke a constructor to create a collection and assign it to the collection variable.
- Use the assignment statement to assign it the value of another existing collection variable.
- Pass it to a subprogram as an `OUT` or `IN OUT` parameter, and then assign the value inside the subprogram.
- Use a qualified expression to assign values to an associative array (see Example 6-11).

To assign a value to a scalar element of a collection variable, reference the element as *`collection_variable_name`*`(`*`index`*`)` and assign it a value.

Topics

- Data Type Compatibility
- Assigning Null Values to Varray or Nested Table Variables
- Assigning Set Operation Results to Nested Table Variables

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- "Collection Constructors"
- "Assignment Statement" syntax diagram
- "Assigning Values to Variables" for instructions on how to assign a value to a scalar element of a collection variable
- "BULK COLLECT Clause"

Data Type Compatibility

You can assign a collection to a collection variable only if they have the same data type. Having the same element type is not enough.

Example 6-14 Data Type Compatibility for Collection Assignment

In this example, `VARRAY` types `triplet` and `trio` have the same element type, `VARCHAR(15)`. Collection variables `group1` and `group2` have the same data type, `triplet`, but collection variable `group3` has the data type `trio`. The assignment of `group1` to `group2` succeeds, but the assignment of `group1` to `group3` fails.

Live SQL

You can view and run this example on Oracle Live SQL at Data Type Compatibility for Collection Assignment

```
DECLARE
  TYPE triplet IS VARRAY(3) OF VARCHAR2(15);
  TYPE trio    IS VARRAY(3) OF VARCHAR2(15);

  group1 triplet := triplet('Jones', 'Wong', 'Marceau');
  group2 triplet;
  group3 trio;
BEGIN
  group2 := group1;  -- succeeds
  group3 := group1;  -- fails
END;
/
```

Result:

```
ORA-06550: line 10, column 13:
PLS-00382: expression is of wrong type
```

Assigning Null Values to Varray or Nested Table Variables

To a varray or nested table variable, you can assign the value `NULL` or a null collection of the same data type. Either assignment makes the variable null.

Example 6-15 initializes the nested table variable `dept_names` to a non-null value; assigns a null collection to it, making it null; and re-initializes it to a different non-null value.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-15 Assigning Null Value to Nested Table Variable

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Assigning Null Value to Nested Table Variable

```
DECLARE
  TYPE dnames_tab IS TABLE OF VARCHAR2(30);

  dept_names dnames_tab := dnames_tab(
    'Shipping','Sales','Finance','Payroll');  -- Initialized to non-null value

  empty_set dnames_tab;  -- Not initialized, therefore null

  PROCEDURE print_dept_names_status IS
  BEGIN
    IF dept_names IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('dept_names is null.');
    ELSE
      DBMS_OUTPUT.PUT_LINE('dept_names is not null.');
    END IF;
  END  print_dept_names_status;

BEGIN
  print_dept_names_status;
  dept_names := empty_set;  -- Assign null collection to dept_names.
  print_dept_names_status;
  dept_names := dnames_tab (
    'Shipping','Sales','Finance','Payroll');  -- Re-initialize dept_names
  print_dept_names_status;
END;
/
```

Result:

```
dept_names is not null.
dept_names is null.
dept_names is not null.
```

Assigning Set Operation Results to Nested Table Variables

To a nested table variable, you can assign the result of a SQL `MULTISET` operation or SQL `SET` function invocation.

The SQL `MULTISET` operators combine two nested tables into a single nested table. The elements of the two nested tables must have comparable data types. For information about the `MULTISET` operators, see *Oracle Database SQL Language Reference*.

The SQL `SET` function takes a nested table argument and returns a nested table of the same data type whose elements are distinct (the function eliminates duplicate elements). For information about the `SET` function, see *Oracle Database SQL Language Reference*.

Example 6-16 Assigning Set Operation Results to Nested Table Variable

This example assigns the results of several `MULTISET` operations and one `SET` function invocation of the nested table variable `answer`, using the procedure `print_nested_table` to

Copyright © 1996, 2025, Oracle and/or its affiliates.

print `answer` after each assignment. The procedure uses the collection methods `FIRST` and `LAST`, described in "Collection Methods".

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Assigning Set Operation Results to Nested Table Variable

```
DECLARE
  TYPE nested_typ IS TABLE OF NUMBER;

  nt1    nested_typ := nested_typ(1,2,3);
  nt2    nested_typ := nested_typ(3,2,1);
  nt3    nested_typ := nested_typ(2,3,1,3);
  nt4    nested_typ := nested_typ(1,2,4);
  answer nested_typ;

  PROCEDURE print_nested_table (nt nested_typ) IS
    output VARCHAR2(128);
  BEGIN
    IF nt IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('Result: null set');
    ELSIF nt.COUNT = 0 THEN
      DBMS_OUTPUT.PUT_LINE('Result: empty set');
    ELSE
      FOR i IN nt.FIRST .. nt.LAST LOOP  -- For first to last element
        output := output || nt(i) || ' ';
      END LOOP;
      DBMS_OUTPUT.PUT_LINE('Result: ' || output);
    END IF;
  END print_nested_table;

BEGIN
  answer := nt1 MULTISET UNION nt4;
  print_nested_table(answer);
  answer := nt1 MULTISET UNION nt3;
  print_nested_table(answer);
  answer := nt1 MULTISET UNION DISTINCT nt3;
  print_nested_table(answer);
  answer := nt2 MULTISET INTERSECT nt3;
  print_nested_table(answer);
  answer := nt2 MULTISET INTERSECT DISTINCT nt3;
  print_nested_table(answer);
  answer := SET(nt3);
  print_nested_table(answer);
  answer := nt3 MULTISET EXCEPT nt2;
  print_nested_table(answer);
  answer := nt3 MULTISET EXCEPT DISTINCT nt2;
  print_nested_table(answer);
END;
/
```

Result:

```
Result: 1 2 3 1 2 4
Result: 1 2 3 2 3 1 3
Result: 1 2 3
Result: 3 2 1
Result: 3 2 1
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Result: 2 3 1
Result: 3
Result: empty set
```

Multidimensional Collections

Although a collection has only one dimension, you can model a multidimensional collection with a collection whose elements are collections.

Example 6-17 Two-Dimensional Varray (Varray of Varrays)

In this example, `nva` is a two-dimensional varray—a varray of varrays of integers.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Two-Dimensional Varray (Varray of Varrays)

```
DECLARE
  TYPE t1 IS VARRAY(10) OF INTEGER;  -- varray of integer
  va t1 := t1(2,3,5);

  TYPE nt1 IS VARRAY(10) OF t1;      -- varray of varray of integer
  nva nt1 := nt1(va, t1(55,6,73), t1(2,4), va);

  i INTEGER;
  va1 t1;
BEGIN
  i := nva(2)(3);
  DBMS_OUTPUT.PUT_LINE('i = ' || i);

  nva.EXTEND;
  nva(5) := t1(56, 32);          -- replace inner varray elements
  nva(4) := t1(45,43,67,43345);  -- replace an inner integer element
  nva(4)(4) := 1;                -- replace 43345 with 1

  nva(4).EXTEND;    -- add element to 4th varray element
  nva(4)(5) := 89;  -- store integer 89 there
END;
/
```

Result:

```
i = 73
```

Example 6-18 Nested Tables of Nested Tables and Varrays of Integers

In this example, `ntb1` is a nested table of nested tables of strings, and `ntb2` is a nested table of varrays of integers.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Nested Tables of Nested Tables and Varrays of Integers

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE tb1 IS TABLE OF VARCHAR2(20);  -- nested table of strings
  vtb1 tb1 := tb1('one', 'three');

  TYPE ntb1 IS TABLE OF tb1; -- nested table of nested tables of strings
  vntb1 ntb1 := ntb1(vtb1);

  TYPE tv1 IS VARRAY(10) OF INTEGER;  -- varray of integers
  TYPE ntb2 IS TABLE OF tv1;          -- nested table of varrays of integers
  vntb2 ntb2 := ntb2(tv1(3,5), tv1(5,7,3));

BEGIN
  vntb1.EXTEND;
  vntb1(2) := vntb1(1);
  vntb1.DELETE(1);     -- delete first element of vntb1
  vntb1(2).DELETE(1);  -- delete first string from second table in nested table
END;
/
```

Example 6-19 Nested Tables of Associative Arrays and Varrays of Strings

In this example, `aa1` is an associative array of associative arrays, and `ntb2` is a nested table of varrays of strings.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Nested Tables of Associative Arrays and Varrays of Strings

```
DECLARE
  TYPE tb1 IS TABLE OF INTEGER INDEX BY PLS_INTEGER;  -- associative arrays
  v4 tb1;
  v5 tb1;

  TYPE aa1 IS TABLE OF tb1 INDEX BY PLS_INTEGER;  -- associative array of
  v2 aa1;                                         --  associative arrays

  TYPE va1 IS VARRAY(10) OF VARCHAR2(20);  -- varray of strings
  v1 va1 := va1('hello', 'world');

  TYPE ntb2 IS TABLE OF va1 INDEX BY PLS_INTEGER;  -- associative array of varrays
  v3 ntb2;

BEGIN
  v4(1)   := 34;     -- populate associative array
  v4(2)   := 46456;
  v4(456) := 343;

  v2(23) := v4;  -- populate associative array of associative arrays

  v3(34) := va1(33, 456, 656, 343);  -- populate associative array varrays

  v2(35) := v5;      -- assign empty associative array to v2(35)
  v2(35)(2) := 78;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Collection Comparisons

To determine if one collection variable is less than another (for example), you must define what less than means in that context and write a function that returns `TRUE` or `FALSE`.

You cannot compare associative array variables to the value `NULL` or to each other.

Except for Comparing Nested Tables for Equality and Inequality, you cannot natively compare two collection variables with relational operators. This restriction also applies to implicit comparisons. For example, a collection variable cannot appear in a `DISTINCT`, `GROUP BY`, or `ORDER BY` clause.

Topics

- Comparing Varray and Nested Table Variables to NULL
- Comparing Nested Tables for Equality and Inequality
- Comparing Nested Tables with SQL Multiset Conditions

> **See Also**
>
> - Table 3-5
> - PL/SQL Subprograms for information about writing functions

Comparing Varray and Nested Table Variables to NULL

Use the `IS[NOT] NULL` operator when comparing to the NULL value.

You can compare varray and nested table variables to the value `NULL` with the "IS [NOT] NULL Operator", but not with the relational operators equal (=) and not equal (<>, `!=`, `~=`, or `^=`).

Example 6-20 Comparing Varray and Nested Table Variables to NULL

This example compares a varray variable and a nested table variable to `NULL` correctly.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Comparing Varray and Nested Table Variables to NULL

```
DECLARE
  TYPE Foursome IS VARRAY(4) OF VARCHAR2(15);  -- VARRAY type
  team Foursome;                               -- varray variable

  TYPE Roster IS TABLE OF VARCHAR2(15);        -- nested table type
  names Roster := Roster('Adams', 'Patel');    -- nested table variable

BEGIN
  IF team IS NULL THEN
    DBMS_OUTPUT.PUT_LINE('team IS NULL');
  ELSE
    DBMS_OUTPUT.PUT_LINE('team IS NOT NULL');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END IF;

  IF names IS NOT NULL THEN
    DBMS_OUTPUT.PUT_LINE('names IS NOT NULL');
  ELSE
    DBMS_OUTPUT.PUT_LINE('names IS NULL');
  END IF;
END;
/
```

Result:

```
team IS NULL
names IS NOT NULL
```

Comparing Nested Tables for Equality and Inequality

Two nested table variables are equal if and only if they have the same set of elements (in any order).

If two nested table variables have the same nested table type, and that nested table type does not have elements of a record type, then you can compare the two variables for equality or inequality with the relational operators equal (=) and not equal (<>, !=, ~=, ^=).

> **See Also**
>
> "Record Comparisons"

Example 6-21 Comparing Nested Tables for Equality and Inequality

This example compares nested table variables for equality and inequality with relational operators.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Comparing Nested Tables for Equality and Inequality

```
DECLARE
  TYPE dnames_tab IS TABLE OF VARCHAR2(30); -- element type is not record type

  dept_names1 dnames_tab :=
    dnames_tab('Shipping','Sales','Finance','Payroll');

  dept_names2 dnames_tab :=
    dnames_tab('Sales','Finance','Shipping','Payroll');

  dept_names3 dnames_tab :=
    dnames_tab('Sales','Finance','Payroll');

BEGIN
  IF dept_names1 = dept_names2 THEN
    DBMS_OUTPUT.PUT_LINE('dept_names1 = dept_names2');
  END IF;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  IF dept_names2 != dept_names3 THEN
    DBMS_OUTPUT.PUT_LINE('dept_names2 != dept_names3');
  END IF;
END;
/
```

Result:

```
dept_names1 = dept_names2
dept_names2 != dept_names3
```

Comparing Nested Tables with SQL Multiset Conditions

You can compare nested table variables, and test some of their properties, with SQL multiset conditions.

See Also

- *Oracle Database SQL Language Reference* for more information about multiset conditions
- *Oracle Database SQL Language Reference* for details about `CARDINALITY` syntax
- *Oracle Database SQL Language Reference*for details about `SET` syntax

Example 6-22 Comparing Nested Tables with SQL Multiset Conditions

This example uses the SQL multiset conditions and two SQL functions that take nested table variable arguments, `CARDINALITY` and `SET` .

Live SQL

You can view and run this example on Oracle Live SQL at Comparing Nested Tables with SQL Multiset Conditions

```
DECLARE
  TYPE nested_typ IS TABLE OF NUMBER;
  nt1 nested_typ := nested_typ(1,2,3);
  nt2 nested_typ := nested_typ(3,2,1);
  nt3 nested_typ := nested_typ(2,3,1,3);
  nt4 nested_typ := nested_typ(1,2,4);

  PROCEDURE testify (
    truth BOOLEAN := NULL,
    quantity NUMBER := NULL
  ) IS
  BEGIN
    IF truth IS NOT NULL THEN
      DBMS_OUTPUT.PUT_LINE (
        CASE truth
           WHEN TRUE THEN 'True'
           WHEN FALSE THEN 'False'
        END
      );
    END IF;
    IF quantity IS NOT NULL THEN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
        DBMS_OUTPUT.PUT_LINE(quantity);
    END IF;
  END;
BEGIN
  testify(truth => (nt1 IN (nt2,nt3,nt4)));        -- condition
  testify(truth => (nt1 SUBMULTISET OF nt3));      -- condition
  testify(truth => (nt1 NOT SUBMULTISET OF nt4));  -- condition
  testify(truth => (4 MEMBER OF nt1));             -- condition
  testify(truth => (nt3 IS A SET));                -- condition
  testify(truth => (nt3 IS NOT A SET));            -- condition
  testify(truth => (nt1 IS EMPTY));                -- condition
  testify(quantity => (CARDINALITY(nt3)));         -- function
  testify(quantity => (CARDINALITY(SET(nt3))));    -- 2 functions
END;
/
```

Result:

```
True
True
True
False
False
True
False
4
3
```

Collection Methods

A collection method is a PL/SQL subprogram—either a function that returns information about a collection or a procedure that operates on a collection. Collection methods make collections easier to use and your applications easier to maintain.

Table 6-2 summarizes the collection methods.

> **Note**
>
> With a null collection, `EXISTS` is the only collection method that does not raise the predefined exception `COLLECTION_IS_NULL`.

Table 6-2 Collection Methods

Method	Type	Description
`DELETE`	Procedure	Deletes elements from collection.
`TRIM`	Procedure	Deletes elements from end of varray or nested table.
`EXTEND`	Procedure	Adds elements to end of varray or nested table.
`EXISTS`	Function	Returns `TRUE` if and only if specified element of varray or nested table exists.
`FIRST`	Function	Returns first index in collection.
`LAST`	Function	Returns last index in collection.
`COUNT`	Function	Returns number of elements in collection.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 6-2 (Cont.) Collection Methods

Method	Type	Description
`LIMIT`	Function	Returns maximum number of elements that collection can have.
`PRIOR`	Function	Returns index that precedes specified index.
`NEXT`	Function	Returns index that succeeds specified index.

The basic syntax of a collection method invocation is:

`collection_name.method`

For detailed syntax, see "Collection Method Invocation".

A collection method invocation can appear anywhere that an invocation of a PL/SQL subprogram of its type (function or procedure) can appear, except in a SQL statement. (For general information about PL/SQL subprograms, see PL/SQL Subprograms.)

In a subprogram, a collection parameter assumes the properties of the argument bound to it. You can apply collection methods to such parameters. For varray parameters, the value of `LIMIT` is always derived from the parameter type definition, regardless of the parameter mode.

Topics

- DELETE Collection Method
- TRIM Collection Method
- EXTEND Collection Method
- EXISTS Collection Method
- FIRST and LAST Collection Methods
- COUNT Collection Method
- LIMIT Collection Method
- PRIOR and NEXT Collection Methods

DELETE Collection Method

`DELETE` is a procedure that deletes elements from a collection.

This method has these forms:

- `DELETE` deletes all elements from a collection of any type.

  This operation immediately frees the memory allocated to the deleted elements.
- From an associative array or nested table (but not a varray):
  - `DELETE(`*`n`*`)` deletes the element whose index is *n*, if that element exists; otherwise, it does nothing.
  - `DELETE(`*`m,n`*`)` deletes all elements whose indexes are in the range *m*..*n*, if both *m* and *n* exist and *m* <= *n*; otherwise, it does nothing.

  For these two forms of `DELETE`, PL/SQL keeps placeholders for the deleted elements. Therefore, the deleted elements are included in the internal size of the collection, and you can restore a deleted element by assigning a valid value to it.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-23 DELETE Method with Nested Table

This example declares a nested table variable, initializing it with six elements; deletes and then restores the second element; deletes a range of elements and then restores one of them; and then deletes all elements. The restored elements occupy the same memory as the corresponding deleted elements. The procedure `print_nt` prints the nested table variable after initialization and after each `DELETE` operation. The type `nt_type` and procedure `print_nt` are defined in Example 6-6.

```
DECLARE
  nt nt_type := nt_type(11, 22, 33, 44, 55, 66);
BEGIN
  print_nt(nt);

  nt.DELETE(2);     -- Delete second element
  print_nt(nt);

  nt(2) := 2222;    -- Restore second element
  print_nt(nt);

  nt.DELETE(2, 4);  -- Delete range of elements
  print_nt(nt);

  nt(3) := 3333;    -- Restore third element
  print_nt(nt);

  nt.DELETE;        -- Delete all elements
  print_nt(nt);
END;
/
```

Result:

```
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 44
nt.(5) = 55
nt.(6) = 66
---
nt.(1) = 11
nt.(3) = 33
nt.(4) = 44
nt.(5) = 55
nt.(6) = 66
---
nt.(1) = 11
nt.(2) = 2222
nt.(3) = 33
nt.(4) = 44
nt.(5) = 55
nt.(6) = 66
---
nt.(1) = 11
nt.(5) = 55
nt.(6) = 66
---
nt.(1) = 11
nt.(3) = 3333
nt.(5) = 55
nt.(6) = 66
---
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
nt is empty
---
```

Example 6-24 DELETE Method with Associative Array Indexed by String

This example populates an associative array indexed by string and deletes all elements, which frees the memory allocated to them. Next, the example replaces the deleted elements—that is, adds new elements that have the same indexes as the deleted elements. The new replacement elements do not occupy the same memory as the corresponding deleted elements. Finally, the example deletes one element and then a range of elements. The procedure `print_aa_str` shows the effects of the operations.

```
DECLARE
  TYPE aa_type_str IS TABLE OF INTEGER INDEX BY VARCHAR2(10);
  aa_str  aa_type_str;

  PROCEDURE print_aa_str IS
    i  VARCHAR2(10);
  BEGIN
    i := aa_str.FIRST;

    IF i IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('aa_str is empty');
    ELSE
      WHILE i IS NOT NULL LOOP
        DBMS_OUTPUT.PUT('aa_str.(' || i || ') = ');
        DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(aa_str(i)), 'NULL'));
        i := aa_str.NEXT(i);
      END LOOP;
    END IF;

    DBMS_OUTPUT.PUT_LINE('---');
  END print_aa_str;

BEGIN
  aa_str('M') := 13;
  aa_str('Z') := 26;
  aa_str('C') := 3;
  print_aa_str;

  aa_str.DELETE;  -- Delete all elements
  print_aa_str;

  aa_str('M') := 13;   -- Replace deleted element with same value
  aa_str('Z') := 260;  -- Replace deleted element with new value
  aa_str('C') := 30;   -- Replace deleted element with new value
  aa_str('W') := 23;   -- Add new element
  aa_str('J') := 10;   -- Add new element
  aa_str('N') := 14;   -- Add new element
  aa_str('P') := 16;   -- Add new element
  aa_str('W') := 23;   -- Add new element
  aa_str('J') := 10;   -- Add new element
  print_aa_str;

  aa_str.DELETE('C');      -- Delete one element
  print_aa_str;

  aa_str.DELETE('N','W');  -- Delete range of elements
  print_aa_str;

  aa_str.DELETE('Z','M');  -- Does nothing
  print_aa_str;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
aa_str.(C) = 3
aa_str.(M) = 13
aa_str.(Z) = 26
---
aa_str is empty
---
aa_str.(C) = 30
aa_str.(J) = 10
aa_str.(M) = 13
aa_str.(N) = 14
aa_str.(P) = 16
aa_str.(W) = 23
aa_str.(Z) = 260
---
aa_str.(J) = 10
aa_str.(M) = 13
aa_str.(N) = 14
aa_str.(P) = 16
aa_str.(W) = 23
aa_str.(Z) = 260
---
aa_str.(J) = 10
aa_str.(M) = 13
aa_str.(Z) = 260
---
aa_str.(J) = 10
aa_str.(M) = 13
aa_str.(Z) = 260
---
```

TRIM Collection Method

`TRIM` is a procedure that deletes elements from the end of a varray or nested table.

This method has these forms:

- `TRIM` removes one element from the end of the collection, if the collection has at least one element; otherwise, it raises the predefined exception `SUBSCRIPT_BEYOND_COUNT`.
- `TRIM(`*n*`)` removes *n* elements from the end of the collection, if there are at least *n* elements at the end; otherwise, it raises the predefined exception `SUBSCRIPT_BEYOND_COUNT`.

`TRIM` operates on the internal size of a collection. That is, if `DELETE` deletes an element but keeps a placeholder for it, then `TRIM` considers the element to exist. Therefore, `TRIM` can delete a deleted element.

PL/SQL does not keep placeholders for trimmed elements. Therefore, trimmed elements are not included in the internal size of the collection, and you cannot restore a trimmed element by assigning a valid value to it.

> ⚠ **Caution**
>
> Do not depend on interaction between `TRIM` and `DELETE`. Treat nested tables like either fixed-size arrays (and use only `DELETE`) or stacks (and use only `TRIM` and `EXTEND`).

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-25 TRIM Method with Nested Table

This example declares a nested table variable, initializing it with six elements; trims the last element; deletes the fourth element; and then trims the last two elements—one of which is the deleted fourth element. The procedure `print_nt` prints the nested table variable after initialization and after the `TRIM` and `DELETE` operations. The type `nt_type` and procedure `print_nt` are defined in Example 6-6.

```
DECLARE
  nt nt_type := nt_type(11, 22, 33, 44, 55, 66);
BEGIN
  print_nt(nt);

  nt.TRIM;       -- Trim last element
  print_nt(nt);

  nt.DELETE(4);  -- Delete fourth element
  print_nt(nt);

  nt.TRIM(2);    -- Trim last two elements
  print_nt(nt);
END;
/
```

Result:

```
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 44
nt.(5) = 55
nt.(6) = 66
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 44
nt.(5) = 55
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(5) = 55
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
---
```

EXTEND Collection Method

`EXTEND` is a procedure that adds elements to the end of a varray or nested table.

The collection can be empty, but not null. (To make a collection empty or add elements to a null collection, use a constructor. For more information, see "Collection Constructors".)

The `EXTEND` method has these forms:

- `EXTEND` appends one null element to the collection.
- `EXTEND(`*n*`)` appends *n* null elements to the collection.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- `EXTEND(n,i)` appends *n* copies of the *i*th element to the collection.

> **Note**
>
> `EXTEND(n,i)` is the only form that you can use for a collection whose elements have the `NOT NULL` constraint.

`EXTEND` operates on the internal size of a collection. That is, if `DELETE` deletes an element but keeps a placeholder for it, then `EXTEND` considers the element to exist.

Example 6-26 EXTEND Method with Nested Table

This example declares a nested table variable, initializing it with three elements; appends two copies of the first element; deletes the fifth (last) element; and then appends one null element. Because `EXTEND` considers the deleted fifth element to exist, the appended null element is the sixth element. The procedure `print_nt` prints the nested table variable after initialization and after the `EXTEND` and `DELETE` operations. The type `nt_type` and procedure `print_nt` are defined in Example 6-6.

```
DECLARE
  nt nt_type := nt_type(11, 22, 33);
BEGIN
  print_nt(nt);

  nt.EXTEND(2,1);  -- Append two copies of first element
  print_nt(nt);

  nt.DELETE(5);    -- Delete fifth element
  print_nt(nt);

  nt.EXTEND;       -- Append one null element
  print_nt(nt);
END;
/
```

Result:

```
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 11
nt.(5) = 11
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 11
---
nt.(1) = 11
nt.(2) = 22
nt.(3) = 33
nt.(4) = 11
nt.(6) = NULL
---
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

EXISTS Collection Method

EXISTS is a function that tells you whether the specified element of a varray or nested table exists.

EXISTS(*n*) returns TRUE if the *n*th element of the collection exists and FALSE otherwise. If *n* is out of range, EXISTS returns FALSE instead of raising the predefined exception SUBSCRIPT_OUTSIDE_LIMIT.

For a deleted element, EXISTS(*n*) returns FALSE, even if DELETE kept a placeholder for it.

Example 6-27 EXISTS Method with Nested Table

This example initializes a nested table with four elements, deletes the second element, and prints either the value or status of elements 1 through 6.

```
DECLARE
  TYPE NumList IS TABLE OF INTEGER;
  n NumList := NumList(1,3,5,7);
BEGIN
  n.DELETE(2); -- Delete second element

  FOR i IN 1..6 LOOP
    IF n.EXISTS(i) THEN
      DBMS_OUTPUT.PUT_LINE('n(' || i || ') = ' || n(i));
    ELSE
      DBMS_OUTPUT.PUT_LINE('n(' || i || ') does not exist');
    END IF;
  END LOOP;
END;
/
```

Result:

```
n(1) = 1
n(2) does not exist
n(3) = 5
n(4) = 7
n(5) does not exist
n(6) does not exist
```

FIRST and LAST Collection Methods

FIRST and LAST are functions.

If the collection has at least one element, FIRST and LAST return the indexes of the first and last elements, respectively (ignoring deleted elements, even if DELETE kept placeholders for them). If the collection has only one element, FIRST and LAST return the same index. If the collection is empty, FIRST and LAST return NULL.

Topics

- FIRST and LAST Methods for Associative Array
- FIRST and LAST Methods for Varray
- FIRST and LAST Methods for Nested Table

Copyright © 1996, 2025, Oracle and/or its affiliates.

FIRST and LAST Methods for Associative Array

For an associative array indexed by `PLS_INTEGER`, the first and last elements are those with the smallest and largest indexes, respectively. For an associative array indexed by string, the first and last elements are those with the lowest and highest key values, respectively.

Key values are in sorted order (for more information, see "NLS Parameter Values Affect Associative Arrays Indexed by String").

Example 6-28 FIRST and LAST Values for Associative Array Indexed by PLS_INTEGER

This example shows the values of `FIRST` and `LAST` for an associative array indexed by `PLS_INTEGER`, deletes the first and last elements, and shows the values of `FIRST` and `LAST` again.

```
DECLARE
  TYPE aa_type_int IS TABLE OF INTEGER INDEX BY PLS_INTEGER;
  aa_int  aa_type_int;

  PROCEDURE print_first_and_last IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('FIRST = ' || aa_int.FIRST);
    DBMS_OUTPUT.PUT_LINE('LAST = ' || aa_int.LAST);
  END print_first_and_last;

BEGIN
  aa_int(1) := 3;
  aa_int(2) := 6;
  aa_int(3) := 9;
  aa_int(4) := 12;

  DBMS_OUTPUT.PUT_LINE('Before deletions:');
  print_first_and_last;

  aa_int.DELETE(1);
  aa_int.DELETE(4);

  DBMS_OUTPUT.PUT_LINE('After deletions:');
  print_first_and_last;
END;
/
```

Result:

```
Before deletions:
FIRST = 1
LAST = 4
After deletions:
FIRST = 2
LAST = 3
```

Example 6-29 FIRST and LAST Values for Associative Array Indexed by String

This example shows the values of `FIRST` and `LAST` for an associative array indexed by string, deletes the first and last elements, and shows the values of `FIRST` and `LAST` again.

```
DECLARE
  TYPE aa_type_str IS TABLE OF INTEGER INDEX BY VARCHAR2(10);
  aa_str  aa_type_str;

  PROCEDURE print_first_and_last IS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  BEGIN
    DBMS_OUTPUT.PUT_LINE('FIRST = ' || aa_str.FIRST);
    DBMS_OUTPUT.PUT_LINE('LAST = ' || aa_str.LAST);
  END print_first_and_last;

BEGIN
  aa_str('Z') := 26;
  aa_str('A') := 1;
  aa_str('K') := 11;
  aa_str('R') := 18;

  DBMS_OUTPUT.PUT_LINE('Before deletions:');
  print_first_and_last;

  aa_str.DELETE('A');
  aa_str.DELETE('Z');

  DBMS_OUTPUT.PUT_LINE('After deletions:');
  print_first_and_last;
END;
/
```

Result:

```
Before deletions:
FIRST = A
LAST = Z
After deletions:
FIRST = K
LAST = R
```

FIRST and LAST Methods for Varray

For a varray that is not empty, `FIRST` always returns 1. For every varray, `LAST` always equals `COUNT`.

Example 6-30 Printing Varray with FIRST and LAST in FOR LOOP

This example prints the varray `team` using a `FOR LOOP` statement with the bounds `team.FIRST` and `team.LAST`. Because a varray is always dense, `team(i)` inside the loop always exists.

```
DECLARE
  TYPE team_type IS VARRAY(4) OF VARCHAR2(15);
  team team_type;

  PROCEDURE print_team (heading VARCHAR2)
  IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(heading);

    IF team IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('Does not exist');
    ELSIF team.FIRST IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('Has no members');
    ELSE
      FOR i IN team.FIRST..team.LAST LOOP
        DBMS_OUTPUT.PUT_LINE(i || '. ' || team(i));
      END LOOP;
    END IF;

    DBMS_OUTPUT.PUT_LINE('---');
  END;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  print_team('Team Status:');

  team := team_type();  -- Team is funded, but nobody is on it.
  print_team('Team Status:');

  team := team_type('John', 'Mary');  -- Put 2 members on team.
  print_team('Initial Team:');

  team := team_type('Arun', 'Amitha', 'Allan', 'Mae');  -- Change team.
  print_team('New Team:');
END;
/
```

Result:

```
Team Status:
Does not exist
---
Team Status:
Has no members
---
Initial Team:
1. John
2. Mary
---
New Team:
1. Arun
2. Amitha
3. Allan
4. Mae
---
```

Related Topic

- Example 6-32

FIRST and LAST Methods for Nested Table

For a nested table, `LAST` equals `COUNT` unless you delete elements from its middle, in which case `LAST` is larger than `COUNT`.

Example 6-31 Printing Nested Table with FIRST and LAST in FOR LOOP

This example prints the nested table `team` using a `FOR LOOP` statement with the bounds `team.FIRST` and `team.LAST`. Because a nested table can be sparse, the `FOR LOOP` statement prints `team(i)` only if `team.EXISTS(i)` is `TRUE`.

```
DECLARE
  TYPE team_type IS TABLE OF VARCHAR2(15);
  team team_type;

  PROCEDURE print_team (heading VARCHAR2) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(heading);

    IF team IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('Does not exist');
    ELSIF team.FIRST IS NULL THEN
      DBMS_OUTPUT.PUT_LINE('Has no members');
    ELSE
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      FOR i IN team.FIRST..team.LAST LOOP
        DBMS_OUTPUT.PUT(i || '. ');
        IF team.EXISTS(i) THEN
          DBMS_OUTPUT.PUT_LINE(team(i));
        ELSE
          DBMS_OUTPUT.PUT_LINE('(to be hired)');
        END IF;
      END LOOP;
    END IF;

    DBMS_OUTPUT.PUT_LINE('---');
  END;

BEGIN
  print_team('Team Status:');

  team := team_type();  -- Team is funded, but nobody is on it.
  print_team('Team Status:');

  team := team_type('Arun', 'Amitha', 'Allan', 'Mae');  -- Add members.
  print_team('Initial Team:');

  team.DELETE(2,3);  -- Remove 2nd and 3rd members.
  print_team('Current Team:');
END;
/
```

Result:

```
Team Status:
Does not exist
---
Team Status:
Has no members
---
Initial Team:
1. Arun
2. Amitha
3. Allan
4. Mae
---
Current Team:
1. Arun
2. (to be hired)
3. (to be hired)
4. Mae
---
```

Related Topic

- Example 6-33

COUNT Collection Method

`COUNT` is a function that returns the number of elements in the collection (ignoring deleted elements, even if `DELETE` kept placeholders for them).

Topics

- COUNT Method for Varray
- COUNT Method for Nested Table

Copyright © 1996, 2025, Oracle and/or its affiliates.

COUNT Method for Varray

For a varray, `COUNT` always equals `LAST`. If you increase or decrease the size of a varray (with the `EXTEND` or `TRIM` method), the value of `COUNT` changes.

Example 6-32 COUNT and LAST Values for Varray

This example shows the values of `COUNT` and `LAST` for a varray after initialization with four elements, after `EXTEND(3)`, and after `TRIM(5)`.

```
DECLARE
  TYPE NumList IS VARRAY(10) OF INTEGER;
  n NumList := NumList(1,3,5,7);

  PROCEDURE print_count_and_last IS
  BEGIN
    DBMS_OUTPUT.PUT('n.COUNT = ' || n.COUNT || ', ');
    DBMS_OUTPUT.PUT_LINE('n.LAST = ' || n.LAST);
  END  print_count_and_last;

BEGIN
  print_count_and_last;

  n.EXTEND(3);
  print_count_and_last;

  n.TRIM(5);
  print_count_and_last;
END;
/
```

Result:

```
n.COUNT = 4, n.LAST = 4
n.COUNT = 7, n.LAST = 7
n.COUNT = 2, n.LAST = 2
```

COUNT Method for Nested Table

For a nested table, `COUNT` equals `LAST` unless you delete elements from the middle of the nested table, in which case `COUNT` is smaller than `LAST`.

Example 6-33 COUNT and LAST Values for Nested Table

This example shows the values of `COUNT` and `LAST` for a nested table after initialization with four elements, after deleting the third element, and after adding two null elements to the end. Finally, the example prints the status of elements 1 through 8.

```
DECLARE
  TYPE NumList IS TABLE OF INTEGER;
  n NumList := NumList(1,3,5,7);

  PROCEDURE print_count_and_last IS
  BEGIN
    DBMS_OUTPUT.PUT('n.COUNT = ' || n.COUNT || ', ');
    DBMS_OUTPUT.PUT_LINE('n.LAST = ' || n.LAST);
  END  print_count_and_last;

BEGIN
  print_count_and_last;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  n.DELETE(3);  -- Delete third element
  print_count_and_last;

  n.EXTEND(2);  -- Add two null elements to end
  print_count_and_last;

  FOR i IN 1..8 LOOP
    IF n.EXISTS(i) THEN
      IF n(i) IS NOT NULL THEN
        DBMS_OUTPUT.PUT_LINE('n(' || i || ') = ' || n(i));
      ELSE
        DBMS_OUTPUT.PUT_LINE('n(' || i || ') = NULL');
      END IF;
    ELSE
      DBMS_OUTPUT.PUT_LINE('n(' || i || ') does not exist');
    END IF;
  END LOOP;
END;
/
```

Result:

```
n.COUNT = 4, n.LAST = 4
n.COUNT = 3, n.LAST = 4
n.COUNT = 5, n.LAST = 6
n(1) = 1
n(2) = 3
n(3) does not exist
n(4) = 7
n(5) = NULL
n(6) = NULL
n(7) does not exist
n(8) does not exist
```

LIMIT Collection Method

`LIMIT` is a function that returns the maximum number of elements that the collection can have. If the collection has no maximum number of elements, `LIMIT` returns `NULL`. Only a varray has a maximum size.

Example 6-34 LIMIT and COUNT Values for Different Collection Types

This example prints the values of `LIMIT` and `COUNT` for an associative array with four elements, a varray with two elements, and a nested table with three elements.

```
DECLARE
  TYPE aa_type IS TABLE OF INTEGER INDEX BY PLS_INTEGER;
  aa aa_type;                           -- associative array

  TYPE va_type IS VARRAY(4) OF INTEGER;
  va  va_type := va_type(2,4);   -- varray

  TYPE nt_type IS TABLE OF INTEGER;
  nt  nt_type := nt_type(1,3,5);  -- nested table

BEGIN
  aa(1):=3; aa(2):=6; aa(3):=9; aa(4):= 12;

  DBMS_OUTPUT.PUT('aa.COUNT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(aa.COUNT), 'NULL'));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT('aa.LIMIT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(aa.LIMIT), 'NULL'));

  DBMS_OUTPUT.PUT('va.COUNT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(va.COUNT), 'NULL'));

  DBMS_OUTPUT.PUT('va.LIMIT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(va.LIMIT), 'NULL'));

  DBMS_OUTPUT.PUT('nt.COUNT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(nt.COUNT), 'NULL'));

  DBMS_OUTPUT.PUT('nt.LIMIT = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(nt.LIMIT), 'NULL'));
END;
/
```

Result:

```
aa.COUNT = 4
aa.LIMIT = NULL
va.COUNT = 2
va.LIMIT = 4
nt.COUNT = 3
nt.LIMIT = NULL
```

PRIOR and NEXT Collection Methods

`PRIOR` and `NEXT` are functions that let you move backward and forward in the collection (ignoring deleted elements, even if `DELETE` kept placeholders for them). These methods are useful for traversing sparse collections.

Given an index:

- `PRIOR` returns the index of the preceding existing element of the collection, if one exists. Otherwise, `PRIOR` returns `NULL`.

  For any collection `c`, `c.PRIOR(c.FIRST)` returns `NULL`.

- `NEXT` returns the index of the succeeding existing element of the collection, if one exists. Otherwise, `NEXT` returns `NULL`.

  For any collection `c`, `c.NEXT(c.LAST)` returns `NULL`.

The given index need not exist. However, if the collection `c` is a varray, and the index exceeds `c.LIMIT`, then:

- `c.PRIOR(`*index*`)` returns `c.LAST`.
- `c.NEXT(`*index*`)` returns `NULL`.

For example:

```
DECLARE
  TYPE Arr_Type IS VARRAY(10) OF NUMBER;
  v_Numbers Arr_Type := Arr_Type();
BEGIN
  v_Numbers.EXTEND(4);

  v_Numbers (1) := 10;
  v_Numbers (2) := 20;
  v_Numbers (3) := 30;
  v_Numbers (4) := 40;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE(NVL(v_Numbers.prior (3400), -1));
  DBMS_OUTPUT.PUT_LINE(NVL(v_Numbers.next (3400), -1));
END;
/
```

Result:

```
4
-1
```

For an associative array indexed by string, the prior and next indexes are determined by key values, which are in sorted order (for more information, see "NLS Parameter Values Affect Associative Arrays Indexed by String"). Example 6-1 uses `FIRST`, `NEXT`, and a `WHILE LOOP` statement to print the elements of an associative array.

Example 6-35 PRIOR and NEXT Methods

This example initializes a nested table with six elements, deletes the fourth element, and then shows the values of `PRIOR` and `NEXT` for elements 1 through 7. Elements 4 and 7 do not exist. Element 2 exists, despite its null value.

```
DECLARE
  TYPE nt_type IS TABLE OF NUMBER;
  nt nt_type := nt_type(18, NULL, 36, 45, 54, 63);

BEGIN
  nt.DELETE(4);
  DBMS_OUTPUT.PUT_LINE('nt(4) was deleted.');

  FOR i IN 1..7 LOOP
    DBMS_OUTPUT.PUT('nt.PRIOR(' || i || ') = ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(nt.PRIOR(i)), 'NULL'));

    DBMS_OUTPUT.PUT('nt.NEXT(' || i || ')  = ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(nt.NEXT(i)), 'NULL'));
  END LOOP;
END;
/
```

Result:

```
nt(4) was deleted.
nt.PRIOR(1) = NULL
nt.NEXT(1)  = 2
nt.PRIOR(2) = 1
nt.NEXT(2)  = 3
nt.PRIOR(3) = 2
nt.NEXT(3)  = 5
nt.PRIOR(4) = 3
nt.NEXT(4)  = 5
nt.PRIOR(5) = 3
nt.NEXT(5)  = 6
nt.PRIOR(6) = 5
nt.NEXT(6)  = NULL
nt.PRIOR(7) = 6
nt.NEXT(7)  = NULL
```

Example 6-36 Printing Elements of Sparse Nested Table

This example prints the elements of a sparse nested table from first to last, using `FIRST` and `NEXT`, and from last to first, using `LAST` and `PRIOR`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE NumList IS TABLE OF NUMBER;
  n NumList := NumList(1, 2, NULL, NULL, 5, NULL, 7, 8, 9, NULL);
  idx INTEGER;

BEGIN
  DBMS_OUTPUT.PUT_LINE('First to last:');
  idx := n.FIRST;
  WHILE idx IS NOT NULL LOOP
    DBMS_OUTPUT.PUT('n(' || idx || ') = ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(n(idx)), 'NULL'));
    idx := n.NEXT(idx);
  END LOOP;

  DBMS_OUTPUT.PUT_LINE('--------------');

  DBMS_OUTPUT.PUT_LINE('Last to first:');
  idx := n.LAST;
  WHILE idx IS NOT NULL LOOP
    DBMS_OUTPUT.PUT('n(' || idx || ') = ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(n(idx)), 'NULL'));
    idx := n.PRIOR(idx);
  END LOOP;
END;
/
```

Result:

```
First to last:
n(1) = 1
n(2) = 2
n(3) = NULL
n(4) = NULL
n(5) = 5
n(6) = NULL
n(7) = 7
n(8) = 8
n(9) = 9
n(10) = NULL
--------------
Last to first:
n(10) = NULL
n(9) = 9
n(8) = 8
n(7) = 7
n(6) = NULL
n(5) = 5
n(4) = NULL
n(3) = NULL
n(2) = 2
n(1) = 1
```

Collection Types Defined in Package Specifications

A collection type defined in a package specification is incompatible with an identically defined local or standalone collection type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The examples in this topic define packages and procedures, which are explained in PL/SQL Packages and PL/SQL Subprograms, respectively.

Example 6-37 Identically Defined Package and Local Collection Types

In this example, the package specification and the anonymous block define the collection type `NumList` identically. The package defines a procedure, `print_numlist`, which has a `NumList` parameter. The anonymous block declares the variable `n1` of the type `pkg.NumList` (defined in the package) and the variable `n2` of the type `NumList` (defined in the block). The anonymous block can pass `n1` to `print_numlist`, but it cannot pass `n2` to `print_numlist`.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Identically Defined Package and Local Collection Types

```
CREATE OR REPLACE PACKAGE pkg AS
  TYPE NumList IS TABLE OF NUMBER;
  PROCEDURE print_numlist (nums NumList);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS
  PROCEDURE print_numlist (nums NumList) IS
  BEGIN
    FOR i IN nums.FIRST..nums.LAST LOOP
      DBMS_OUTPUT.PUT_LINE(nums(i));
    END LOOP;
  END;
END pkg;
/
DECLARE
  TYPE NumList IS TABLE OF NUMBER;  -- local type identical to package type
  n1 pkg.NumList := pkg.NumList(2,4);  -- package type
  n2     NumList :=     NumList(6,8);  -- local type
BEGIN
  pkg.print_numlist(n1);  -- succeeds
  pkg.print_numlist(n2);  -- fails
END;
/
```

Result:

```
  pkg.print_numlist(n2);  -- fails
  *
ERROR at line 7:
ORA-06550: line 7, column 3:
PLS-00306: wrong number or types of arguments in call to 'PRINT_NUMLIST'
ORA-06550: line 7, column 3:
PL/SQL: Statement ignored
```

Example 6-38 Identically Defined Package and Standalone Collection Types

This example defines a standalone collection type `NumList` that is identical to the collection type `NumList` defined in the package specification in Example 6-37. The anonymous block

Copyright © 1996, 2025, Oracle and/or its affiliates.

declares the variable `n1` of the type `pkg.NumList` (defined in the package) and the variable `n2` of the standalone type `NumList`. The anonymous block can pass `n1` to `print_numlist`, but it cannot pass `n2` to `print_numlist`.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Identically Defined Package and Standalone Collection Types

```
CREATE OR REPLACE TYPE NumList IS TABLE OF NUMBER;
  -- standalone collection type identical to package type
/
DECLARE
  n1 pkg.NumList := pkg.NumList(2,4);  -- package type
  n2     NumList :=     NumList(6,8);  -- standalone type

BEGIN
  pkg.print_numlist(n1);  -- succeeds
  pkg.print_numlist(n2);  -- fails
END;
/
```

Result:

```
  pkg.print_numlist(n2);  -- fails
  *
ERROR at line 7:
ORA-06550: line 7, column 3:
PLS-00306: wrong number or types of arguments in call to 'PRINT_NUMLIST'
ORA-06550: line 7, column 3:
PL/SQL: Statement ignored
```

Record Variables

You can create a record variable in any of these ways:

- Define a `RECORD` type and then declare a variable of that type.
- Use `%ROWTYPE` to declare a record variable that represents either a full or partial row of a database table or view.
- Use `%TYPE` to declare a record variable of the same type as a previously declared record variable.

For syntax and semantics, see "Record Variable Declaration".

Topics

- Initial Values of Record Variables
- Declaring Record Constants
- RECORD Types
- Declaring Items using the %ROWTYPE Attribute

Copyright © 1996, 2025, Oracle and/or its affiliates.

Initial Values of Record Variables

For a record variable of a `RECORD` type, the initial value of each field is `NULL` unless you specify a different initial value for it when you define the type.

For a record variable declared with `%ROWTYPE` or `%TYPE`, the initial value of each field is `NULL`. The variable does not inherit the initial value of the referenced item.

Declaring Record Constants

When declaring a record constant, you can use qualified expressions positional or named association notations to initialize values in a compact form.

Example 6-39 Declaring Record Constant

This example shows the record constant r being initialized with a qualified expression. The values of 0 and 1 are assigned by explicitly indicating the My_Rec typemark and an aggregate specified using the positional notation.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Declaring Record Constant

```
DECLARE
  TYPE My_Rec IS RECORD (a NUMBER, b NUMBER);
  r CONSTANT My_Rec := My_Rec(0,1);
BEGIN
  DBMS_OUTPUT.PUT_LINE('r.a = ' || r.a);
  DBMS_OUTPUT.PUT_LINE('r.b = ' || r.b);
END;
/
```

Prior to Oracle Database Release 18c, to achieve the same result, you had to declare a record constant using a function that populates the record with its initial value and then invoke the function in the constant declaration. You can observe by comparing both examples that qualified expressions improve program clarity and developer productivity by being more compact.

```
CREATE OR REPLACE PACKAGE My_Types AUTHID CURRENT_USER IS
  TYPE My_Rec IS RECORD (a NUMBER, b NUMBER);
  FUNCTION Init_My_Rec RETURN My_Rec;
END My_Types;
/
CREATE OR REPLACE PACKAGE BODY My_Types IS
  FUNCTION Init_My_Rec RETURN My_Rec IS
    Rec My_Rec;
  BEGIN
    Rec.a := 0;
    Rec.b := 1;
    RETURN Rec;
  END Init_My_Rec;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END My_Types;
/
DECLARE
  r CONSTANT My_Types.My_Rec := My_Types.Init_My_Rec();
BEGIN
  DBMS_OUTPUT.PUT_LINE('r.a = ' || r.a);
  DBMS_OUTPUT.PUT_LINE('r.b = ' || r.b);
END;
/
```

Result:

```
r.a = 0
r.b = 1
```

Example 6-40 Declaring Record Constant

This example shows a record constant c_small initialized with a qualified expression using the positional notation. The c_large record constant is initialized with a qualified expression using the named association notation.

```
DECLARE
  TYPE t_size IS RECORD (x NUMBER, y NUMBER);
  c_small  CONSTANT t_size := t_size(32,36);
  c_large  CONSTANT t_size := t_size(x => 192, y => 292);
BEGIN
  DBMS_OUTPUT.PUT_LINE('Small size is ' || c_small.x  || ' by ' || c_small.y);
  DBMS_OUTPUT.PUT_LINE('Large size is ' || c_large.x  || ' by ' || c_large.y);
END;
/
```

Result:

```
Small size is 32 by 36
Large size is 192 by 292
```

RECORD Types

A `RECORD` type defined in a PL/SQL block is a **local type**. It is available only in the block, and is stored in the database only if the block is in a standalone or package subprogram.

A `RECORD` type defined in a package specification is a **public item**. You can reference it from outside the package by qualifying it with the package name (*`package_name.type_name`*). It is stored in the database until you drop the package with the `DROP PACKAGE` statement.

You cannot create a `RECORD` type at schema level. Therefore, a `RECORD` type cannot be an ADT attribute data type.

To define a `RECORD` type, specify its name and define its fields. To define a field, specify its name and data type. By default, the initial value of a field is `NULL`. You can specify the `NOT NULL` constraint for a field, in which case you must also specify a non-`NULL` initial value. Without the `NOT NULL` constraint, a non-`NULL` initial value is optional.

A `RECORD` type defined in a package specification is incompatible with an identically defined local `RECORD` type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- PL/SQL Packages
- PL/SQL Subprograms
- Nested, Package, and Standalone Subprograms
- Example 6-44, ""

Example 6-41 RECORD Type Definition and Variable Declaration

This example defines a `RECORD` type named `DeptRecTyp`, specifying an initial value for each field. Then it declares a variable of that type named `dept_rec` and prints its fields.

Live SQL

You can view and run this example on Oracle Live SQL at RECORD Type Definition and Variable Declaration

```
DECLARE
  TYPE DeptRecTyp IS RECORD (
    dept_id    NUMBER(4) NOT NULL := 10,
    dept_name  VARCHAR2(30) NOT NULL := 'Administration',
    mgr_id     NUMBER(6) := 200,
    loc_id     NUMBER(4) := 1700
  );

  dept_rec DeptRecTyp;
BEGIN
  DBMS_OUTPUT.PUT_LINE('dept_id:   ' || dept_rec.dept_id);
  DBMS_OUTPUT.PUT_LINE('dept_name: ' || dept_rec.dept_name);
  DBMS_OUTPUT.PUT_LINE('mgr_id:    ' || dept_rec.mgr_id);
  DBMS_OUTPUT.PUT_LINE('loc_id:    ' || dept_rec.loc_id);
END;
/
```

Result:

```
dept_id:   10
dept_name: Administration
mgr_id:    200
loc_id:    1700
```

Example 6-42 RECORD Type with RECORD Field (Nested Record)

This example defines two `RECORD` types, `name_rec` and `contact`. The type `contact` has a field of type `name_rec`.

Live SQL

You can view and run this example on Oracle Live SQL at RECORD Type with RECORD Field (Nested Record)

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE name_rec IS RECORD (
    first  employees.first_name%TYPE,
    last   employees.last_name%TYPE
  );

  TYPE contact IS RECORD (
    name  name_rec,                    -- nested record
    phone employees.phone_number%TYPE
  );

  friend contact;
BEGIN
  friend.name.first := 'John';
  friend.name.last := 'Smith';
  friend.phone := '1-650-555-1234';

  DBMS_OUTPUT.PUT_LINE (
    friend.name.first  || ' ' ||
    friend.name.last   || ', ' ||
    friend.phone
  );
END;
/
```

Result:

```
John Smith, 1-650-555-1234
```

Example 6-43 RECORD Type with Varray Field

This defines a `VARRAY` type, `full_name`, and a `RECORD` type, `contact`. The type `contact` has a field of type `full_name`.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at RECORD Type with Varray Field

```
DECLARE
  TYPE full_name IS VARRAY(2) OF VARCHAR2(20);

  TYPE contact IS RECORD (
    name  full_name := full_name('John', 'Smith'),  -- varray field
    phone employees.phone_number%TYPE
  );

  friend contact;
BEGIN
  friend.phone := '1-650-555-1234';

  DBMS_OUTPUT.PUT_LINE (
    friend.name(1) || ' ' ||
    friend.name(2) || ', ' ||
    friend.phone
  );
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
John Smith, 1-650-555-1234
```

Example 6-44 Identically Defined Package and Local RECORD Types

In this example, the package `pkg` and the anonymous block define the `RECORD` type `rec_type` identically. The package defines a procedure, `print_rec_type`, which has a `rec_type` parameter. The anonymous block declares the variable `r1` of the package type (`pkg.rec_type`) and the variable `r2` of the local type (`rec_type`). The anonymous block can pass `r1` to `print_rec_type`, but it cannot pass `r2` to `print_rec_type`.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Identically Defined Package and Local RECORD Types

```
CREATE OR REPLACE PACKAGE pkg AS
  TYPE rec_type IS RECORD (       -- package RECORD type
    f1 INTEGER,
    f2 VARCHAR2(4)
  );
  PROCEDURE print_rec_type (rec rec_type);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS
  PROCEDURE print_rec_type (rec rec_type) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(rec.f1);
    DBMS_OUTPUT.PUT_LINE(rec.f2);
  END;
END pkg;
/
DECLARE
  TYPE rec_type IS RECORD (       -- local RECORD type
    f1 INTEGER,
    f2 VARCHAR2(4)
  );
  r1 pkg.rec_type;                -- package type
  r2     rec_type;                -- local type

BEGIN
  r1.f1 := 10; r1.f2 := 'abcd';
  r2.f1 := 25; r2.f2 := 'wxyz';

  pkg.print_rec_type(r1);  -- succeeds
  pkg.print_rec_type(r2);  -- fails
END;
/
```

Result:

```
  pkg.print_rec_type(r2);  -- fails
  *
ERROR at line 14:
ORA-06550: line 14, column 3:
PLS-00306: wrong number or types of arguments in call to 'PRINT_REC_TYPE'
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Declaring Items using the %ROWTYPE Attribute

The `%ROWTYPE` attribute lets you declare a record variable that represents either a full or partial row of a database table or view.

For the syntax and semantics details, see %ROWTYPE Attribute.

Topics

- Declaring a Record Variable that Always Represents Full Row
- Declaring a Record Variable that Can Represent Partial Row
- %ROWTYPE Attribute and Virtual Columns
- %ROWTYPE Attribute and Invisible Columns

Declaring a Record Variable that Always Represents Full Row

To declare a record variable that always represents a full row of a database table or view, use this syntax:

variable_name table_or_view_name`%ROWTYPE;`

For every column of the table or view, the record has a field with the same name and data type.

> **See Also**
>
> "%ROWTYPE Attribute" for more information about `%ROWTYPE`

Example 6-45 %ROWTYPE Variable Represents Full Database Table Row

This example declares a record variable that represents a row of the table `departments`, assigns values to its fields, and prints them. Compare this example to Example 6-41.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at %ROWTYPE Variable Represents Full Database Table Row

```
DECLARE
  dept_rec departments%ROWTYPE;
BEGIN
  -- Assign values to fields:

  dept_rec.department_id   := 10;
  dept_rec.department_name := 'Administration';
  dept_rec.manager_id      := 200;
  dept_rec.location_id     := 1700;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- Print fields:

  DBMS_OUTPUT.PUT_LINE('dept_id:   ' || dept_rec.department_id);
  DBMS_OUTPUT.PUT_LINE('dept_name: ' || dept_rec.department_name);
  DBMS_OUTPUT.PUT_LINE('mgr_id:    ' || dept_rec.manager_id);
  DBMS_OUTPUT.PUT_LINE('loc_id:    ' || dept_rec.location_id);
END;
/
```

Result:

```
dept_id:   10
dept_name: Administration
mgr_id:    200
loc_id:    1700
```

Example 6-46 %ROWTYPE Variable Does Not Inherit Initial Values or Constraints

This example creates a table with two columns, each with an initial value and a `NOT NULL` constraint. Then it declares a record variable that represents a row of the table and prints its fields, showing that they did not inherit the initial values or `NOT NULL` constraints.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at %ROWTYPE Variable Does Not Inherit Initial Values or Constraints

```
CREATE OR REPLACE PROCEDURE print (n INTEGER) IS
BEGIN
  IF n IS NOT NULL THEN
    DBMS_OUTPUT.PUT_LINE(n);
  ELSE
    DBMS_OUTPUT.PUT_LINE('NULL');
  END IF;
END print;
/

DROP TABLE t1;
CREATE TABLE t1 (
  c1 INTEGER DEFAULT 0 NOT NULL,
  c2 INTEGER DEFAULT 1 NOT NULL
);

DECLARE
  t1_row t1%ROWTYPE;
BEGIN
  DBMS_OUTPUT.PUT('t1.c1 = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(t1_row.c1), 'NULL'));

  DBMS_OUTPUT.PUT('t1.c2 = '); print(t1_row.c2);
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(t1_row.c2), 'NULL'));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
t1.c1 = NULL
t1.c2 = NULL
```

Declaring a Record Variable that Can Represent Partial Row

To declare a record variable that can represent a partial row of a database table or view, use this syntax:

variable_name cursor%ROWTYPE;

A cursor is associated with a query. For every column that the query selects, the record variable must have a corresponding, type-compatible field. If the query selects every column of the table or view, then the variable represents a full row; otherwise, the variable represents a partial row. The cursor must be either an explicit cursor or a strong cursor variable.

See Also

- "FETCH Statement" for complete syntax
- "Cursors Overview" for information about cursors
- "Explicit Cursors" for information about explicit cursors
- "Cursor Variables" for information about cursor variables
- *Oracle Database SQL Language Reference* for information about joins

Example 6-47 %ROWTYPE Variable Represents Partial Database Table Row

This example defines an explicit cursor whose query selects only the columns `first_name`, `last_name`, and `phone_number` from the `employees` table in the sample schema `HR`. Then the example declares a record variable that has a field for each column that the cursor selects. The variable represents a partial row of `employees`. Compare this example to Example 6-42.

Live SQL

You can view and run this example on Oracle Live SQL at %ROWTYPE Variable Represents Partial Database Table Row

```
DECLARE
  CURSOR c IS
    SELECT first_name, last_name, phone_number
    FROM employees;

  friend c%ROWTYPE;
BEGIN
  friend.first_name   := 'John';
  friend.last_name    := 'Smith';
  friend.phone_number := '1-650-555-1234';
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE (
    friend.first_name  || ' ' ||
    friend.last_name   || ', ' ||
    friend.phone_number
  );
END;
/
```

Result:

```
John Smith, 1-650-555-1234
```

Example 6-48 %ROWTYPE Variable Represents Join Row

This example defines an explicit cursor whose query is a join and then declares a record variable that has a field for each column that the cursor selects.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at %ROWTYPE Variable Represents Join Row

```
DECLARE
  CURSOR c2 IS
    SELECT employee_id, email, employees.manager_id, location_id
    FROM employees, departments
    WHERE employees.department_id = departments.department_id;

  join_rec c2%ROWTYPE;  -- includes columns from two tables

BEGIN
  NULL;
END;
/
```

%ROWTYPE Attribute and Virtual Columns

If you use the `%ROWTYPE` attribute to define a record variable that represents a full row of a table that has a virtual column, then you cannot insert that record into the table. Instead, you must insert the individual record fields into the table, excluding the virtual column.

Example 6-49 Inserting %ROWTYPE Record into Table (Wrong)

This example creates a record variable that represents a full row of a table that has a virtual column, populates the record, and inserts the record into the table, causing ORA-54013.

```
DROP TABLE plch_departure;

CREATE TABLE plch_departure (
  destination    VARCHAR2(100),
  departure_time DATE,
  delay          NUMBER(10),
  expected       GENERATED ALWAYS AS (departure_time + delay/24/60/60)
);


DECLARE
 dep_rec plch_departure%ROWTYPE;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  dep_rec.destination := 'X';
  dep_rec.departure_time := SYSDATE;
  dep_rec.delay := 1500;

  INSERT INTO plch_departure VALUES dep_rec;
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-54013: INSERT operation disallowed on virtual columns
ORA-06512: at line 8
```

Example 6-50 Inserting %ROWTYPE Record into Table (Right)

This solves the problem in Example 6-49 by inserting the individual record fields into the table, excluding the virtual column.

```
DECLARE
  dep_rec plch_departure%rowtype;
BEGIN
  dep_rec.destination := 'X';
  dep_rec.departure_time := SYSDATE;
  dep_rec.delay := 1500;

  INSERT INTO plch_departure (destination, departure_time, delay)
  VALUES (dep_rec.destination, dep_rec.departure_time, dep_rec.delay);
end;
/
```

Result:

```
PL/SQL procedure successfully completed.
```

%ROWTYPE Attribute and Invisible Columns

Suppose that you use the `%ROWTYPE` attribute to define a record variable that represents a row of a table that has an invisible column, and then you make the invisible column visible.

If you define the record variable with a cursor, as in "Declaring a Record Variable that Can Represent Partial Row", then making the invisible column visible does not change the structure of the record variable.

However, if you define the record variable as in "Declaring a Record Variable that Always Represents Full Row" and use a `SELECT * INTO` statement to assign values to the record, then making the invisible column visible does change the structure of the record—see Example 6-51.

> **See Also**
>
> *Oracle Database SQL Language Reference* for general information about invisible columns

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-51 %ROWTYPE Affected by Making Invisible Column Visible

```
CREATE TABLE t (a INT, b INT, c INT INVISIBLE);
INSERT INTO t (a, b, c) VALUES (1, 2, 3);
COMMIT;

DECLARE
  t_rec t%ROWTYPE;  -- t_rec has fields a and b, but not c
BEGIN
  SELECT * INTO t_rec FROM t WHERE ROWNUM < 2;  -- t_rec(a)=1, t_rec(b)=2
  DBMS_OUTPUT.PUT_LINE('c = ' || t_rec.c);
END;
/
```

Result:

```
  DBMS_OUTPUT.PUT_LINE('c = ' || t_rec.c);
                                 *
ERROR at line 5:
ORA-06550: line 5, column 40:
PLS-00302: component 'C' must be declared
ORA-06550: line 5, column 3:
PL/SQL: Statement ignored
```

Make invisible column visible:

```
ALTER TABLE t MODIFY (c VISIBLE);
```

Result:

```
Table altered.
```

Repeat preceding anonymous block:

```
DECLARE
  t_rec t%ROWTYPE;  -- t_rec has fields a, b, and c
BEGIN
  SELECT * INTO t_rec FROM t WHERE ROWNUM < 2;  -- t_rec(a)=1, t_rec(b)=2,
                                                -- t_rec(c)=3
  DBMS_OUTPUT.PUT_LINE('c = ' || t_rec.c);
END;
/
```

Result:

```
c = 3

PL/SQL procedure successfully completed.
```

Assigning Values to Record Variables

A *record variable* means either a record variable or a record component of a composite variable.

To any record variable, you can assign a value to each field individually.

You can assign values using qualified expressions.

In some cases, you can assign the value of one record variable to another record variable.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If a record variable represents a full or partial row of a database table or view, you can assign the represented row to the record variable.

Topics

- Assigning Values to RECORD Type Variables Using Qualified Expressions
- Assigning One Record Variable to Another
- Assigning Full or Partial Rows to Record Variables
- Assigning NULL to a Record Variable

Assigning Values to RECORD Type Variables Using Qualified Expressions

You can assign values to `RECORD` type variables using qualified expressions positional association or named association aggregates.

A qualified expression combines expression elements to create values of a `RECORD` type. An aggregate defines a compound type value. You can assign values to a `RECORD` type using qualified expressions. Positional and named associations are allowed for qualified expressions of `RECORD` type. A positional association may not follow a named association in the same construct (and vice versa). A final optional others choice can be specified after the positional and named associations.

A qualified expression is this context has this structure:

```
qualified_expression ::= typemark ( aggregate )

aggregate ::=  ( positional_association  |  named_association ) [ others_choice ]

positional_association ::= ( expr )+

named_association ::= identifier => expr [,]+
```

Example 6-52 Assigning Values to RECORD Type Variables Using Qualified Expressions

This example shows the declaration, initialization, and definition of `RECORD` type variables.

Type rec_t is defined and partially initialized in package pkg.

Variable v_rec1 is declared with that type and assigned initial values using a positional aggregate.

Variable v_rec2 is declared with that type as well and assigned initial values using a named association aggregate.

Variable v_rec3 is assigned the NULL values.

The procedure print_rec displays the values of the local variable v_rec1, followed by the procedure parameter pi_rec variable values. If no parameter is passed to the procedure, it displays the initial values set in the procedure definition.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Live SQL

You can view and run this example on Oracle Live SQL at "18c Assigning Values to RECORD Type Variables Using Qualified Expressions"

```
CREATE PACKAGE pkg IS
  TYPE rec_t IS RECORD
   (year PLS_INTEGER := 2,
    name VARCHAR2 (100) );
END;
/
DECLARE
  v_rec1 pkg.rec_t := pkg.rec_t(1847,'ONE EIGHT FOUR SEVEN');
  v_rec2 pkg.rec_t := pkg.rec_t(year => 1, name => 'ONE');
  v_rec3 pkg.rec_t := pkg.rec_t(NULL,NULL);

PROCEDURE print_rec ( pi_rec pkg.rec_t := pkg.rec_t(1847+1,  'a'||'b')) IS
  v_rec1 pkg.rec_t := pkg.rec_t(2847,'TWO EIGHT FOUR SEVEN');
BEGIN
  DBMS_OUTPUT.PUT_LINE(NVL(v_rec1.year,0) ||' ' ||NVL(v_rec1.name,'N/A'));
  DBMS_OUTPUT.PUT_LINE(NVL(pi_rec.year,0) ||' ' ||NVL(pi_rec.name,'N/A'));
END;
BEGIN
  print_rec(v_rec1);
  print_rec(v_rec2);
  print_rec(v_rec3);
  print_rec();
END;
/


2847 TWO EIGHT FOUR SEVEN
1847 ONE EIGHT FOUR SEVEN
2847 TWO EIGHT FOUR SEVEN
1 ONE
2847 TWO EIGHT FOUR SEVEN
0 N/A
2847 TWO EIGHT FOUR SEVEN
1848 ab
```

Assigning One Record Variable to Another

You can assign the value of one record variable to another record variable only in these cases:

- The two variables have the same `RECORD` type.
- The target variable is declared with a `RECORD` type, the source variable is declared with `%ROWTYPE`, their fields match in number and order, and corresponding fields have the same data type.

For record components of composite variables, the types of the composite variables need not match.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 6-53 Assigning Record to Another Record of Same RECORD Type

In this example, name1 and name2 have the same RECORD type, so you can assign the value of name1 to name2.

```
DECLARE
  TYPE name_rec IS RECORD (
    first  employees.first_name%TYPE DEFAULT 'John',
    last   employees.last_name%TYPE DEFAULT 'Doe'
  );

  name1 name_rec;
  name2 name_rec;

BEGIN
  name1.first := 'Jane'; name1.last := 'Smith';
  DBMS_OUTPUT.PUT_LINE('name1: ' || name1.first || ' ' || name1.last);
  name2 := name1;
  DBMS_OUTPUT.PUT_LINE('name2: ' || name2.first || ' ' || name2.last);
END;
/
```

Result:

```
name1: Jane Smith
name2: Jane Smith
```

Example 6-54 Assigning %ROWTYPE Record to RECORD Type Record

In this example, the target variable is declared with a `RECORD` type, the source variable is declared with `%ROWTYPE`, their fields match in number and order, and corresponding fields have the same data type.

```
DECLARE
  TYPE name_rec IS RECORD (
    first  employees.first_name%TYPE DEFAULT 'John',
    last   employees.last_name%TYPE DEFAULT 'Doe'
  );

  CURSOR c IS
    SELECT first_name, last_name
    FROM employees;

  target name_rec;
  source c%ROWTYPE;

BEGIN
  source.first_name := 'Jane'; source.last_name := 'Smith';

  DBMS_OUTPUT.PUT_LINE (
    'source: ' || source.first_name || ' ' || source.last_name
  );

 target := source;

 DBMS_OUTPUT.PUT_LINE (
   'target: ' || target.first || ' ' || target.last
 );
END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
source: Jane Smith
target: Jane Smith
```

Example 6-55 Assigning Nested Record to Another Record of Same RECORD Type

This example assigns the value of one nested record to another nested record. The nested records have the same `RECORD` type, but the records in which they are nested do not.

```
DECLARE
  TYPE name_rec IS RECORD (
    first  employees.first_name%TYPE,
    last   employees.last_name%TYPE
  );

  TYPE phone_rec IS RECORD (
    name  name_rec,                     -- nested record
    phone employees.phone_number%TYPE
  );

  TYPE email_rec IS RECORD (
    name  name_rec,                     -- nested record
    email employees.email%TYPE
  );

  phone_contact phone_rec;
  email_contact email_rec;

BEGIN
  phone_contact.name.first := 'John';
  phone_contact.name.last := 'Smith';
  phone_contact.phone := '1-650-555-1234';

  email_contact.name := phone_contact.name;
  email_contact.email := (
    email_contact.name.first || '.' ||
    email_contact.name.last  || '@' ||
    'example.com'
  );

  DBMS_OUTPUT.PUT_LINE (email_contact.email);
END;
/
```

Result:

```
John.Smith@example.com
```

Assigning Full or Partial Rows to Record Variables

If a record variable represents a full or partial row of a database table or view, you can assign the represented row to the record variable.

Topics

- Using SELECT INTO to Assign a Row to a Record Variable
- Using FETCH to Assign a Row to a Record Variable
- Using SQL Statements to Return Rows in PL/SQL Record Variables

Copyright © 1996, 2025, Oracle and/or its affiliates.

Using SELECT INTO to Assign a Row to a Record Variable

The syntax of a simple `SELECT INTO` statement is:

```
SELECT select_list INTO record_variable_name FROM table_or_view_name;
```

For each column in *`select_list`*, the record variable must have a corresponding, type-compatible field. The columns in *`select_list`* must appear in the same order as the record fields.

> **See Also**
>
> "SELECT INTO Statement" for complete syntax

Example 6-56 SELECT INTO Assigns Values to Record Variable

In this example, the record variable `rec1` represents a partial row of the `employees` table—the columns `last_name` and `employee_id`. The `SELECT INTO` statement selects from `employees` the row for which `job_id` is `'AD_PRES'` and assigns the values of the columns `last_name` and `employee_id` in that row to the corresponding fields of `rec1`.

```
DECLARE
  TYPE RecordTyp IS RECORD (
    last employees.last_name%TYPE,
    id   employees.employee_id%TYPE
  );
  rec1 RecordTyp;
BEGIN
  SELECT last_name, employee_id INTO rec1
  FROM employees
  WHERE job_id = 'AD_PRES';

  DBMS_OUTPUT.PUT_LINE ('Employee #' || rec1.id || ' = ' || rec1.last);
END;
/
```

Result:

```
Employee #100 = King
```

Using FETCH to Assign a Row to a Record Variable

The syntax of a simple `FETCH` statement is:

```
FETCH cursor INTO record_variable_name;
```

A cursor is associated with a query. For every column that the query selects, the record variable must have a corresponding, type-compatible field. The cursor must be either an explicit cursor or a strong cursor variable.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- "FETCH Statement" for complete syntax
- "Cursors Overview" for information about all cursors
- "Explicit Cursors" for information about explicit cursors
- "Cursor Variables" for information about cursor variables

Example 6-57 FETCH Assigns Values to Record that Function Returns

In this example, each variable of `RECORD` type `EmpRecTyp` represents a partial row of the `employees` table—the columns `employee_id` and `salary`. Both the cursor and the function return a value of type `EmpRecTyp`. In the function, a `FETCH` statement assigns the values of the columns `employee_id` and `salary` to the corresponding fields of a local variable of type `EmpRecTyp`.

```
DECLARE
  TYPE EmpRecTyp IS RECORD (
    emp_id  employees.employee_id%TYPE,
    salary  employees.salary%TYPE
  );

  CURSOR desc_salary RETURN EmpRecTyp IS
    SELECT employee_id, salary
    FROM employees
    ORDER BY salary DESC;

  highest_paid_emp       EmpRecTyp;
  next_highest_paid_emp  EmpRecTyp;

  FUNCTION nth_highest_salary (n INTEGER) RETURN EmpRecTyp IS
    emp_rec  EmpRecTyp;
  BEGIN
    OPEN desc_salary;
    FOR i IN 1..n LOOP
      FETCH desc_salary INTO emp_rec;
    END LOOP;
    CLOSE desc_salary;
    RETURN emp_rec;
  END nth_highest_salary;

BEGIN
  highest_paid_emp := nth_highest_salary(1);
  next_highest_paid_emp := nth_highest_salary(2);

  DBMS_OUTPUT.PUT_LINE(
    'Highest Paid: #' ||
    highest_paid_emp.emp_id || ', $' ||
    highest_paid_emp.salary
  );
  DBMS_OUTPUT.PUT_LINE(
    'Next Highest Paid: #' ||
    next_highest_paid_emp.emp_id || ', $' ||
    next_highest_paid_emp.salary
  );
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Highest Paid: #100, $24000
Next Highest Paid: #101, $17000
```

Using SQL Statements to Return Rows in PL/SQL Record Variables

The SQL statements `INSERT`, `UPDATE`, and `DELETE` have an optional `RETURNING INTO` clause that can return the affected row in a PL/SQL record variable.

For information about this clause, see "RETURNING INTO Clause".

Example 6-58 UPDATE Statement Assigns Values to Record Variable

In this example, the `UPDATE` statement updates the salary of an employee and returns the name and new salary of the employee in a record variable.

```
DECLARE
  TYPE EmpRec IS RECORD (
    last_name  employees.last_name%TYPE,
    salary     employees.salary%TYPE
  );
  emp_info    EmpRec;
  old_salary  employees.salary%TYPE;
BEGIN
  SELECT salary INTO old_salary
   FROM employees
   WHERE employee_id = 100;

  UPDATE employees
    SET salary = salary * 1.1
    WHERE employee_id = 100
    RETURNING last_name, salary INTO emp_info;

  DBMS_OUTPUT.PUT_LINE (
    'Salary of ' || emp_info.last_name || ' raised from ' ||
    old_salary || ' to ' || emp_info.salary
  );
END;
/
```

Result:

```
Salary of King raised from 24000 to 26400
```

Assigning NULL to a Record Variable

Assigning the value `NULL` to a record variable assigns the value `NULL` to each of its fields.

This assignment is recursive; that is, if a field is a record, then its fields are also assigned the value `NULL`.

Example 6-59 Assigning NULL to Record Variable

This example prints the fields of a record variable (one of which is a record) before and after assigning `NULL` to it.

```
DECLARE
  TYPE age_rec IS RECORD (
    years  INTEGER DEFAULT 35,
    months INTEGER DEFAULT 6
  );
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  TYPE name_rec IS RECORD (
    first  employees.first_name%TYPE DEFAULT 'John',
    last   employees.last_name%TYPE DEFAULT 'Doe',
    age    age_rec
  );

  name name_rec;

  PROCEDURE print_name AS
  BEGIN
    DBMS_OUTPUT.PUT(NVL(name.first, 'NULL') || ' ');
    DBMS_OUTPUT.PUT(NVL(name.last,  'NULL') || ', ');
    DBMS_OUTPUT.PUT(NVL(TO_CHAR(name.age.years), 'NULL') || ' yrs ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(name.age.months), 'NULL') || ' mos');
  END;

BEGIN
  print_name;
  name := NULL;
  print_name;
END;
/
```

Result:

```
John Doe, 35 yrs 6 mos
NULL NULL, NULL yrs NULL mos
```

Record Comparisons

Records cannot be tested natively for nullity, equality, or inequality.

These `BOOLEAN` expressions are illegal:

- `My_Record IS NULL`
- `My_Record_1 = My_Record_2`
- `My_Record_1 > My_Record_2`

You must write your own functions to implement such tests. For information about writing functions, see PL/SQL Subprograms.

Inserting Records into Tables

The PL/SQL extension to the SQL `INSERT` statement lets you insert a record into a table.

The record must represent a row of the table. For more information, see "INSERT Statement Extension". For restrictions on inserting records into tables, see "Restrictions on Record Inserts and Updates".

To efficiently insert a collection of records into a table, put the `INSERT` statement inside a `FORALL` statement. For information about the `FORALL` statement, see "FORALL Statement".

Example 6-60 Initializing Table by Inserting Record of Default Values

This example creates the table `schedule` and initializes it by putting default values in a record and inserting the record into the table for each week. (The `COLUMN` formatting commands are from SQL*Plus.)

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DROP TABLE schedule;
CREATE TABLE schedule (
  week  NUMBER,
  Mon   VARCHAR2(10),
  Tue   VARCHAR2(10),
  Wed   VARCHAR2(10),
  Thu   VARCHAR2(10),
  Fri   VARCHAR2(10),
  Sat   VARCHAR2(10),
  Sun   VARCHAR2(10)
);

DECLARE
  default_week  schedule%ROWTYPE;
  i             NUMBER;
BEGIN
  default_week.Mon := '0800-1700';
  default_week.Tue := '0800-1700';
  default_week.Wed := '0800-1700';
  default_week.Thu := '0800-1700';
  default_week.Fri := '0800-1700';
  default_week.Sat := 'Day Off';
  default_week.Sun := 'Day Off';

  FOR i IN 1..6 LOOP
    default_week.week    := i;

    INSERT INTO schedule VALUES default_week;
  END LOOP;
END;
/

COLUMN week FORMAT 99
COLUMN Mon  FORMAT A9
COLUMN Tue  FORMAT A9
COLUMN Wed  FORMAT A9
COLUMN Thu  FORMAT A9
COLUMN Fri  FORMAT A9
COLUMN Sat  FORMAT A9
COLUMN Sun  FORMAT A9

SELECT * FROM schedule;
```

Result:

```
WEEK MON       TUE       WED       THU       FRI       SAT       SUN
---- --------- --------- --------- --------- --------- --------- ---------
   1 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   2 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   3 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   4 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   5 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   6 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
```

Updating Rows with Records

The PL/SQL extension to the SQL `UPDATE` statement lets you update one or more table rows with a record.

The record must represent a row of the table. For more information, see "UPDATE Statement Extensions".

Copyright © 1996, 2025, Oracle and/or its affiliates.

For restrictions on updating table rows with a record, see "Restrictions on Record Inserts and Updates".

To efficiently update a set of rows with a collection of records, put the `UPDATE` statement inside a `FORALL` statement. For information about the `FORALL` statement, see "FORALL Statement".

Example 6-61 Updating Rows with Record

This example updates the first three weeks of the table `schedule` (defined in Example 6-60) by putting the new values in a record and updating the first three rows of the table with that record.

```
DECLARE
  default_week  schedule%ROWTYPE;
BEGIN
  default_week.Mon := 'Day Off';
  default_week.Tue := '0900-1800';
  default_week.Wed := '0900-1800';
  default_week.Thu := '0900-1800';
  default_week.Fri := '0900-1800';
  default_week.Sat := '0900-1800';
  default_week.Sun := 'Day Off';

  FOR i IN 1..3 LOOP
    default_week.week    := i;

    UPDATE schedule
    SET ROW = default_week
    WHERE week = i;
  END LOOP;
END;
/

SELECT * FROM schedule;
```

Result:

```
WEEK MON       TUE       WED       THU       FRI       SAT       SUN
---- --------- --------- --------- --------- --------- --------- ---------
   1 Day Off   0900-1800 0900-1800 0900-1800 0900-1800 0900-1800 Day Off
   2 Day Off   0900-1800 0900-1800 0900-1800 0900-1800 0900-1800 Day Off
   3 Day Off   0900-1800 0900-1800 0900-1800 0900-1800 0900-1800 Day Off
   4 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   5 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
   6 0800-1700 0800-1700 0800-1700 0800-1700 0800-1700 Day Off   Day Off
```

Restrictions on Record Inserts and Updates

These restrictions apply to record inserts and updates:

- Record variables are allowed only in these places:
  - On the right side of the `SET` clause in an `UPDATE` statement
  - In the `VALUES` clause of an `INSERT` statement
  - In the `INTO` subclause of a `RETURNING` clause

  Record variables are not allowed in a `SELECT` list, `WHERE` clause, `GROUP BY` clause, or `ORDER BY` clause.
- The keyword `ROW` is allowed only on the left side of a `SET` clause. Also, you cannot use `ROW` with a subquery.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- In an `UPDATE` statement, only one `SET` clause is allowed if `ROW` is used.
- If the `VALUES` clause of an `INSERT` statement contains a record variable, no other variable or value is allowed in the clause.
- If the `INTO` subclause of a `RETURNING` clause contains a record variable, no other variable or value is allowed in the subclause.
- These are not supported:
  - Nested `RECORD` types
  - Functions that return a `RECORD` type
  - Record inserts and updates using the `EXECUTE IMMEDIATE` statement.

Copyright © 1996, 2025, Oracle and/or its affiliates.

7

PL/SQL Static SQL

Static SQL is a PL/SQL feature that allows SQL syntax directly in a PL/SQL statement.

This chapter describes static SQL and explains how to use it.

Topics

- Description of Static SQL
- Cursors Overview
- Processing Query Result Sets
- Cursor Variables
- CURSOR Expressions
- Transaction Processing and Control
- Autonomous Transactions

> **See Also**
>
> "Resolution of Names in Static SQL Statements"

Description of Static SQL

Static SQL has the same syntax as SQL, except as noted.

Topics

- Statements
- Pseudocolumns

Statements

These are the PL/SQL static SQL statements, which have the same syntax as the corresponding SQL statements, except as noted:

- `SELECT` (this statement is also called a **query**)

  For the PL/SQL syntax, see "SELECT INTO Statement".
- Data manipulation language (DML) statements:
  - `INSERT`

    For the PL/SQL syntax, see "INSERT Statement Extension".
  - `UPDATE`

    For the PL/SQL syntax, see "UPDATE Statement Extensions".

Copyright © 1996, 2025, Oracle and/or its affiliates.

  - `DELETE`

    For the PL/SQL syntax, see "DELETE Statement Extension".
  - `MERGE` (for syntax, see *Oracle Database SQL Language Reference*)

> **Note**
>
> *Oracle Database SQL Language Reference* defines DML differently.

- Transaction control language (TCL) statements:
  - `COMMIT` (for syntax, see *Oracle Database SQL Language Reference*)
  - `ROLLBACK` (for syntax, see *Oracle Database SQL Language Reference*)
  - `SAVEPOINT` (for syntax, see *Oracle Database SQL Language Reference*)
  - `SET TRANSACTION` (for syntax, see *Oracle Database SQL Language Reference*)
- `LOCK TABLE` (for syntax, see *Oracle Database SQL Language Reference*)

A PL/SQL static SQL statement can have a PL/SQL identifier wherever its SQL counterpart can have a placeholder for a bind variable. The PL/SQL identifier must identify either a variable or a formal parameter.

To use PL/SQL identifiers for table names, column names, and so on, use the `EXECUTE IMMEDIATE` statement, explained in "Native Dynamic SQL"

> **Note**
>
> After PL/SQL code runs a DML statement, the values of some variables are undefined. For example:
>
> - After a `FETCH` or `SELECT` statement raises an exception, the values of the define variables after that statement are undefined.
> - After a DML statement that affects zero rows, the values of the `OUT` bind variables are undefined, unless the DML statement is a `BULK` or multiple-row operation.

Example 7-1 Static SQL Statements

In this example, a PL/SQL anonymous block declares three PL/SQL variables and uses them in the static SQL statements `INSERT`, `UPDATE`, `DELETE`. The block also uses the static SQL statement `COMMIT`.

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS
  SELECT employee_id, first_name, last_name
  FROM employees;

DECLARE
  emp_id          employees_temp.employee_id%TYPE := 299;
  emp_first_name  employees_temp.first_name%TYPE  := 'Bob';
  emp_last_name   employees_temp.last_name%TYPE   := 'Henry';
BEGIN
  INSERT INTO employees_temp (employee_id, first_name, last_name)
  VALUES (emp_id, emp_first_name, emp_last_name);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  UPDATE employees_temp
  SET first_name = 'Robert'
  WHERE employee_id = emp_id;

  DELETE FROM employees_temp
  WHERE employee_id = emp_id
  RETURNING first_name, last_name
  INTO emp_first_name, emp_last_name;

  COMMIT;
  DBMS_OUTPUT.PUT_LINE (emp_first_name || ' ' || emp_last_name);
END;
/
```

Result:

```
Robert Henry
```

Pseudocolumns

A pseudocolumn behaves like a table column, but it is not stored in the table.

For general information about pseudocolumns, including restrictions, see *Oracle Database SQL Language Reference*.

Static SQL includes these SQL pseudocolumns:

- `CURRVAL` and `NEXTVAL`, described in "CURRVAL and NEXTVAL in PL/SQL".
- `LEVEL`, described in *Oracle Database SQL Language Reference*
- `OBJECT_VALUE`, described in *Oracle Database SQL Language Reference*

  > **See Also**
  >
  > "OBJECT_VALUE Pseudocolumn" for information about using `OBJECT_VALUE` in triggers

- `ROWID`, described in *Oracle Database SQL Language Reference*

  > **See Also**
  >
  > "Simulating CURRENT OF Clause with ROWID Pseudocolumn"

- `ROWNUM`, described in *Oracle Database SQL Language Reference*

CURRVAL and NEXTVAL in PL/SQL

After a sequence is created, you can access its values in SQL statements with the `CURRVAL` pseudocolumn, which returns the current value of the sequence, or the `NEXTVAL` pseudocolumn, which increments the sequence and returns the new value.

To reference these pseudocolumns, use dot notation—for example, *`sequence_name`*`.CURRVAL`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Each time you reference *sequence_name*.NEXTVAL, the sequence is incremented immediately and permanently, whether you commit or roll back the transaction.

You can use *sequence_name*.CURRVAL and *sequence_name*.NEXTVAL in a PL/SQL expression wherever you can use a NUMBER expression. However:

- Using *sequence_name*.CURRVAL or *sequence_name*.NEXTVAL to provide a default value for an ADT method parameter causes a compilation error.
- PL/SQL evaluates every occurrence of *sequence_name*.CURRVAL and *sequence_name*.NEXTVAL (unlike SQL, which evaluates a sequence expression for every row in which it appears).

> **See Also**
>
> - *Oracle Database SQL Language Reference* for general information about sequences
> - *Oracle Database SQL Language Reference* for CURRVAL and NEXTVAL complete syntax

Example 7-2 CURRVAL and NEXTVAL Pseudocolumns

This example generates a sequence number for the sequence HR.EMPLOYEES_SEQ and refers to that number in multiple statements.

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS
  SELECT employee_id, first_name, last_name
  FROM employees;

DROP TABLE employees_temp2;
CREATE TABLE employees_temp2 AS
  SELECT employee_id, first_name, last_name
  FROM employees;

DECLARE
  seq_value NUMBER;
BEGIN
  -- Generate initial sequence number

  seq_value := employees_seq.NEXTVAL;

  -- Print initial sequence number:

  DBMS_OUTPUT.PUT_LINE (
    'Initial sequence value: ' || TO_CHAR(seq_value)
  );

  -- Use NEXTVAL to create unique number when inserting data:

     INSERT INTO employees_temp (employee_id, first_name, last_name)
     VALUES (employees_seq.NEXTVAL, 'Lynette', 'Smith');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- Use CURRVAL to store same value somewhere else:

     INSERT INTO employees_temp2 VALUES (employees_seq.CURRVAL,
                                         'Morgan', 'Smith');

  /* Because NEXTVAL values might be referenced
     by different users and applications,
     and some NEXTVAL values might not be stored in database,
     there might be gaps in sequence. */

  -- Use CURRVAL to specify record to delete:

     seq_value := employees_seq.CURRVAL;

     DELETE FROM employees_temp2
     WHERE employee_id = seq_value;

  -- Update employee_id with NEXTVAL for specified record:

     UPDATE employees_temp
     SET employee_id = employees_seq.NEXTVAL
     WHERE first_name = 'Lynette'
     AND last_name = 'Smith';

  -- Display final value of CURRVAL:

     seq_value := employees_seq.CURRVAL;

     DBMS_OUTPUT.PUT_LINE (
       'Ending sequence value: ' || TO_CHAR(seq_value)
     );
END;
/
```

Cursors Overview

A **cursor** is a pointer to a private SQL area that stores information about processing a specific `SELECT` or DML statement.

> **Note**
>
> The cursors that this topic explains are session cursors. A **session cursor** lives in session memory until the session ends, when it ceases to exist.

A cursor that is constructed and managed by PL/SQL is an **implicit cursor**. A cursor that you construct and manage is an **explicit cursor**.

You can get information about any session cursor from its attributes (which you can reference in procedural statements, but not in SQL statements).

To list the session cursors that each user session currently has opened and parsed, query the dynamic performance view `V$OPEN_CURSOR`.

The number of cursors that a session can have open simultaneously is determined by:

- The amount of memory available to the session
- The value of the initialization parameter `OPEN_CURSORS`

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Generally, PL/SQL parses an explicit cursor only the first time the session opens it and parses a SQL statement (creating an implicit cursor) only the first time the statement runs.
>
> All parsed SQL statements are cached. A SQL statement is reparsed only if it is aged out of the cache by a new SQL statement. Although you must close an explicit cursor before you can reopen it, PL/SQL need not reparse the associated query. If you close and immediately reopen an explicit cursor, PL/SQL does not reparse the associated query.

Topics

- Implicit Cursors
- Explicit Cursors

> **See Also**
>
> - *Oracle Database Reference* for information about the dynamic performance view `V$OPEN_CURSOR`
> - *Oracle Database Reference* for information about the initialization parameter `OPEN_CURSORS`

Implicit Cursors

An **implicit cursor** is a session cursor that is constructed and managed by PL/SQL. PL/SQL opens an implicit cursor every time you run a `SELECT` or DML statement. You cannot control an implicit cursor, but you can get information from its attributes.

The syntax of an implicit cursor attribute value is `SQL`*`attribute`* (therefore, an implicit cursor is also called a **SQL cursor**). `SQL`*`attribute`* always refers to the most recently run `SELECT` or DML statement. If no such statement has run, the value of `SQL`*`attribute`* is `NULL`.

An implicit cursor closes after its associated statement runs; however, its attribute values remain available until another `SELECT` or DML statement runs.

The most recently run `SELECT` or DML statement might be in a different scope. To save an attribute value for later use, assign it to a local variable immediately. Otherwise, other operations, such as subprogram invocations, might change the value of the attribute before you can test it.

The implicit cursor attributes are:

- SQL%ISOPEN Attribute: Is the Cursor Open?
- SQL%FOUND Attribute: Were Any Rows Affected?
- SQL%NOTFOUND Attribute: Were No Rows Affected?
- SQL%ROWCOUNT Attribute: How Many Rows Were Affected?
- `SQL%BULK_ROWCOUNT` (see "Getting Number of Rows Affected by FORALL Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SQL%BULK_EXCEPTIONS (see "Handling FORALL Exceptions After FORALL Statement Completes"

> **See Also**
>
> "Implicit Cursor Attribute" for complete syntax and semantics

SQL%ISOPEN Attribute: Is the Cursor Open?

SQL%ISOPEN always returns FALSE, because an implicit cursor always closes after its associated statement runs.

SQL%FOUND Attribute: Were Any Rows Affected?

SQL%FOUND returns:

- NULL if no SELECT or DML statement has run
- TRUE if a SELECT statement returned one or more rows or a DML statement affected one or more rows
- FALSE otherwise

Example 7-3 uses SQL%FOUND to determine if a DELETE statement affected any rows.

Example 7-3 SQL%FOUND Implicit Cursor Attribute

```
DROP TABLE dept_temp;
CREATE TABLE dept_temp AS
  SELECT * FROM departments;

CREATE OR REPLACE PROCEDURE p (
  dept_no NUMBER
) AUTHID CURRENT_USER AS
BEGIN
  DELETE FROM dept_temp
  WHERE department_id = dept_no;

  IF SQL%FOUND THEN
    DBMS_OUTPUT.PUT_LINE (
      'Delete succeeded for department number ' || dept_no
    );
  ELSE
    DBMS_OUTPUT.PUT_LINE ('No department number ' || dept_no);
  END IF;
END;
/
BEGIN
  p(270);
  p(400);
END;
/
```

Result:

```
Delete succeeded for department number 270
No department number 400
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

SQL%NOTFOUND Attribute: Were No Rows Affected?

`SQL%NOTFOUND` (the logical opposite of `SQL%FOUND`) returns:

- `NULL` if no `SELECT` or DML statement has run
- `FALSE` if a `SELECT` statement returned one or more rows or a DML statement affected one or more rows
- `TRUE` otherwise

The `SQL%NOTFOUND` attribute is not useful with the PL/SQL `SELECT INTO` statement, because:

- If the `SELECT INTO` statement returns no rows, PL/SQL raises the predefined exception `NO_DATA_FOUND` immediately, before you can check `SQL%NOTFOUND`.
- A `SELECT INTO` statement that invokes a SQL aggregate function always returns a value (possibly `NULL`). After such a statement, the `SQL%NOTFOUND` attribute is always `FALSE`, so checking it is unnecessary.

SQL%ROWCOUNT Attribute: How Many Rows Were Affected?

`SQL%ROWCOUNT` returns:

- `NULL` if no `SELECT` or DML statement has run
- Otherwise, the number of rows returned by a `SELECT` statement or affected by a DML statement (an `INTEGER`)

> **Note**
>
> If a server is Oracle Database 12c or later and its client is Oracle Database 11g release 2 or earlier (or the reverse), then the maximum number that `SQL%ROWCOUNT` returns is 4,294,967,295.

Example 7-4 uses `SQL%ROWCOUNT` to determine the number of rows that were deleted.

If a `SELECT INTO` statement without a `BULK COLLECT` clause returns multiple rows, PL/SQL raises the predefined exception `TOO_MANY_ROWS` and `SQL%ROWCOUNT` returns 1, not the actual number of rows that satisfy the query.

The value of `SQL%ROWCOUNT` attribute is unrelated to the state of a transaction. Therefore:

- When a transaction rolls back to a savepoint, the value of `SQL%ROWCOUNT` is not restored to the value it had before the savepoint.
- When an autonomous transaction ends, `SQL%ROWCOUNT` is not restored to the original value in the parent transaction.

Example 7-4 SQL%ROWCOUNT Implicit Cursor Attribute

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS
  SELECT * FROM employees;

DECLARE
  mgr_no NUMBER(6) := 122;
BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DELETE FROM employees_temp WHERE manager_id = mgr_no;
  DBMS_OUTPUT.PUT_LINE
    ('Number of employees deleted: ' || TO_CHAR(SQL%ROWCOUNT));
END;
/
```

Result:

```
Number of employees deleted: 8
```

Explicit Cursors

An **explicit cursor** is a session cursor that you construct and manage. You must declare and define an explicit cursor, giving it a name and associating it with a query (typically, the query returns multiple rows). Then you can process the query result set in either of these ways:

- Open the explicit cursor (with the `OPEN` statement), fetch rows from the result set (with the `FETCH` statement), and close the explicit cursor (with the `CLOSE` statement).
- Use the explicit cursor in a cursor `FOR LOOP` statement (see "Processing Query Result Sets With Cursor FOR LOOP Statements".

You cannot assign a value to an explicit cursor, use it in an expression, or use it as a formal subprogram parameter or host variable. You *can* do those things with a cursor variable (see "Cursor Variables").

Unlike an implicit cursor, you can reference an explicit cursor or cursor variable by its name. Therefore, an explicit cursor or cursor variable is called a **named cursor**.

Topics

- Declaring and Defining Explicit Cursors
- Opening and Closing Explicit Cursors
- Fetching Data with Explicit Cursors
- Variables in Explicit Cursor Queries
- When Explicit Cursor Queries Need Column Aliases
- Explicit Cursors that Accept Parameters
- Explicit Cursor Attributes

Declaring and Defining Explicit Cursors

You can either declare an explicit cursor first and then define it later in the same block, subprogram, or package, or declare and define it at the same time.

An **explicit cursor declaration**, which only declares a cursor, has this syntax:

```
CURSOR cursor_name [ parameter_list ] RETURN return_type;
```

An **explicit cursor definition** has this syntax:

```
CURSOR cursor_name [ parameter_list ] [ RETURN return_type ]
  IS select_statement;
```

If you declared the cursor earlier, then the explicit cursor definition defines it; otherwise, it both declares and defines it.

Example 7-5 declares and defines three explicit cursors.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- "Explicit Cursor Declaration and Definition" for the complete syntax and semantics of explicit cursor declaration and definition
- "Explicit Cursors that Accept Parameters"

Example 7-5 Explicit Cursor Declaration and Definition

```
DECLARE
  CURSOR c1 RETURN departments%ROWTYPE;    -- Declare c1

  CURSOR c2 IS                             -- Declare and define c2
    SELECT employee_id, job_id, salary FROM employees
    WHERE salary > 2000;

  CURSOR c1 RETURN departments%ROWTYPE IS  -- Define c1,
    SELECT * FROM departments              -- repeating return type
    WHERE department_id = 110;

  CURSOR c3 RETURN locations%ROWTYPE;      -- Declare c3

  CURSOR c3 IS                             -- Define c3,
    SELECT * FROM locations                -- omitting return type
    WHERE country_id = 'JP';
BEGIN
  NULL;
END;
/
```

Opening and Closing Explicit Cursors

After declaring and defining an explicit cursor, you can open it with the `OPEN` statement, which does the following:

1. Allocates database resources to process the query
2. Processes the query; that is:
   a. Identifies the result set

      If the query references variables or cursor parameters, their values affect the result set. For details, see "Variables in Explicit Cursor Queries" and "Explicit Cursors that Accept Parameters".

   b. If the query has a `FOR UPDATE` clause, locks the rows of the result set

      For details, see "SELECT FOR UPDATE and FOR UPDATE Cursors".
3. Positions the cursor before the first row of the result set

You close an open explicit cursor with the `CLOSE` statement, thereby allowing its resources to be reused. After closing a cursor, you cannot fetch records from its result set or reference its attributes. If you try, PL/SQL raises the predefined exception `INVALID_CURSOR`.

You can reopen a closed cursor. You must close an explicit cursor before you try to reopen it. Otherwise, PL/SQL raises the predefined exception `CURSOR_ALREADY_OPEN`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - "OPEN Statement" for its syntax and semantics
> - "CLOSE Statement" for its syntax and semantics

Fetching Data with Explicit Cursors

After opening an explicit cursor, you can fetch the rows of the query result set with the `FETCH` statement. The basic syntax of a `FETCH` statement that returns one row is:

```
FETCH cursor_name INTO into_clause
```

The *`into_clause`* is either a list of variables or a single record variable. For each column that the query returns, the variable list or record must have a corresponding type-compatible variable or field. The `%TYPE` and `%ROWTYPE` attributes are useful for declaring variables and records for use in `FETCH` statements.

The `FETCH` statement retrieves the current row of the result set, stores the column values of that row into the variables or record, and advances the cursor to the next row.

Typically, you use the `FETCH` statement inside a `LOOP` statement, which you exit when the `FETCH` statement runs out of rows. To detect this exit condition, use the cursor attribute `%NOTFOUND` (described in "%NOTFOUND Attribute: Has No Row Been Fetched?"). PL/SQL does not raise an exception when a `FETCH` statement returns no rows.

Example 7-6 fetches the result sets of two explicit cursors one row at a time, using `FETCH` and `%NOTFOUND` inside `LOOP` statements. The first `FETCH` statement retrieves column values into variables. The second `FETCH` statement retrieves column values into a record. The variables and record are declared with `%TYPE` and `%ROWTYPE`, respectively.

Example 7-7 fetches the first five rows of a result set into five records, using five `FETCH` statements, each of which fetches into a different record variable. The record variables are declared with `%ROWTYPE`.

> **See Also**
>
> - "FETCH Statement" for its complete syntax and semantics
> - "FETCH Statement with BULK COLLECT Clause" for information about `FETCH` statements that return more than one row at a time

Example 7-6 FETCH Statements Inside LOOP Statements

```
DECLARE
  CURSOR c1 IS
    SELECT last_name, job_id FROM employees
    WHERE REGEXP_LIKE (job_id, 'S[HT]_CLERK')
    ORDER BY last_name;

  v_lastname  employees.last_name%TYPE;  -- variable for last_name
  v_jobid     employees.job_id%TYPE;     -- variable for job_id

  CURSOR c2 IS
    SELECT * FROM employees
    WHERE REGEXP_LIKE (job_id, '[ACADFIMKSA]_M[ANGR]')
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    ORDER BY job_id;

  v_employees employees%ROWTYPE;  -- record variable for row of table

BEGIN
  OPEN c1;
  LOOP  -- Fetches 2 columns into variables
    FETCH c1 INTO v_lastname, v_jobid;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE( RPAD(v_lastname, 25, ' ') || v_jobid );
  END LOOP;
  CLOSE c1;
  DBMS_OUTPUT.PUT_LINE( '-----------------------------------' );

  OPEN c2;
  LOOP  -- Fetches entire row into the v_employees record
    FETCH c2 INTO v_employees;
    EXIT WHEN c2%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE( RPAD(v_employees.last_name, 25, ' ') ||
                          v_employees.job_id );
  END LOOP;
  CLOSE c2;
END;
/
```

Result:

```
Atkinson                  ST_CLERK
Bell                      SH_CLERK
Bissot                    ST_CLERK
...
Walsh                     SH_CLERK
-----------------------------------
Higgins                   AC_MGR
Gruenberg                 FI_MGR
Martinez                  MK_MAN
...
Errazuriz                 SA_MAN
```

Example 7-7 Fetching Same Explicit Cursor into Different Variables

```
DECLARE
  CURSOR c IS
    SELECT e.job_id, j.job_title
    FROM employees e, jobs j
    WHERE e.job_id = j.job_id AND e.manager_id = 100
    ORDER BY last_name;

  -- Record variables for rows of cursor result set:

  job1 c%ROWTYPE;
  job2 c%ROWTYPE;
  job3 c%ROWTYPE;
  job4 c%ROWTYPE;
  job5 c%ROWTYPE;

BEGIN
  OPEN c;
  FETCH c INTO job1;  -- fetches first row
  FETCH c INTO job2;  -- fetches second row
  FETCH c INTO job3;  -- fetches third row
  FETCH c INTO job4;  -- fetches fourth row
  FETCH c INTO job5;  -- fetches fifth row
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  CLOSE c;

  DBMS_OUTPUT.PUT_LINE(job1.job_title || ' (' || job1.job_id || ')');
  DBMS_OUTPUT.PUT_LINE(job2.job_title || ' (' || job2.job_id || ')');
  DBMS_OUTPUT.PUT_LINE(job3.job_title || ' (' || job3.job_id || ')');
  DBMS_OUTPUT.PUT_LINE(job4.job_title || ' (' || job4.job_id || ')');
  DBMS_OUTPUT.PUT_LINE(job5.job_title || ' (' || job5.job_id || ')');
END;
/
```

Result:

```
Sales Manager (SA_MAN)
Sales Manager (SA_MAN)
Stock Manager (ST_MAN)
Administration Vice President (AD_VP)
Stock Manager (ST_MAN)

PL/SQL procedure successfully completed.
```

Variables in Explicit Cursor Queries

An explicit cursor query can reference any variable in its scope. When you open an explicit cursor, PL/SQL evaluates any variables in the query and uses those values when identifying the result set. Changing the values of the variables later does not change the result set.

In Example 7-8, the explicit cursor query references the variable `factor`. When the cursor opens, `factor` has the value 2. Therefore, `sal_multiple` is always 2 times `sal`, despite that `factor` is incremented after every fetch.

To change the result set, you must close the cursor, change the value of the variable, and then open the cursor again, as in Example 7-9.

Example 7-8 Variable in Explicit Cursor Query—No Result Set Change

```
DECLARE
  sal           employees.salary%TYPE;
  sal_multiple  employees.salary%TYPE;
  factor        INTEGER := 2;

  CURSOR c1 IS
    SELECT salary, salary*factor FROM employees
    WHERE job_id LIKE 'AD_%';

BEGIN
  OPEN c1;  -- PL/SQL evaluates factor

  LOOP
    FETCH c1 INTO sal, sal_multiple;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('factor = ' || factor);
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
    factor := factor + 1;  -- Does not affect sal_multiple
  END LOOP;

  CLOSE c1;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
factor = 2
sal          = 4400
sal_multiple = 8800
factor = 3
sal          = 24000
sal_multiple = 48000
factor = 4
sal          = 17000
sal_multiple = 34000
factor = 5
sal          = 17000
sal_multiple = 34000
```

Example 7-9 Variable in Explicit Cursor Query—Result Set Change

```
DECLARE
  sal           employees.salary%TYPE;
  sal_multiple  employees.salary%TYPE;
  factor        INTEGER := 2;

  CURSOR c1 IS
    SELECT salary, salary*factor FROM employees
    WHERE job_id LIKE 'AD_%';

BEGIN
  DBMS_OUTPUT.PUT_LINE('factor = ' || factor);
  OPEN c1;  -- PL/SQL evaluates factor
  LOOP
    FETCH c1 INTO sal, sal_multiple;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
  END LOOP;
  CLOSE c1;

  factor := factor + 1;

  DBMS_OUTPUT.PUT_LINE('factor = ' || factor);
  OPEN c1;  -- PL/SQL evaluates factor
  LOOP
    FETCH c1 INTO sal, sal_multiple;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
  END LOOP;
  CLOSE c1;
END;
/
```

Result:

```
factor = 2
sal          = 4400
sal_multiple = 8800
sal          = 24000
sal_multiple = 48000
sal          = 17000
sal_multiple = 34000
sal          = 17000
sal_multiple = 34000
factor = 3
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
sal          = 4400
sal_multiple = 13200
sal          = 24000
sal_multiple = 72000
sal          = 17000
sal_multiple = 51000
sal          = 17000
sal_multiple = 51000
```

When Explicit Cursor Queries Need Column Aliases

When an explicit cursor query includes a virtual column (an expression), that column must have an alias if either of the following is true:

- You use the cursor to fetch into a record that was declared with `%ROWTYPE`.
- You want to reference the virtual column in your program.

In Example 7-10, the virtual column in the explicit cursor needs an alias for both of the preceding reasons.

> **See Also**
>
> Example 7-21

Example 7-10 Explicit Cursor with Virtual Column that Needs Alias

```
DECLARE
  CURSOR c1 IS
    SELECT employee_id,
           (salary * .05) raise
    FROM employees
    WHERE job_id LIKE '%_MAN'
    ORDER BY employee_id;
  emp_rec c1%ROWTYPE;
BEGIN
  OPEN c1;
  LOOP
    FETCH c1 INTO emp_rec;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE (
      'Raise for employee #' || emp_rec.employee_id ||
      ' is $' || emp_rec.raise
    );
  END LOOP;
  CLOSE c1;
END;
/
```

Result:

```
Raise for employee #114 is $550
Raise for employee #120 is $400
Raise for employee #121 is $410
Raise for employee #122 is $395
Raise for employee #123 is $325
Raise for employee #124 is $368.445
Raise for employee #145 is $700
Raise for employee #146 is $675
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Raise for employee #147 is $600
Raise for employee #148 is $550
Raise for employee #149 is $525
Raise for employee #201 is $650
```

Explicit Cursors that Accept Parameters

You can create an explicit cursor that has formal parameters, and then pass different actual parameters to the cursor each time you open it. In the cursor query, you can use a formal cursor parameter anywhere that you can use a constant. Outside the cursor query, you cannot reference formal cursor parameters.

> **Tip**
>
> To avoid confusion, use different names for formal and actual cursor parameters.

Example 7-11 creates an explicit cursor whose two formal parameters represent a job and its maximum salary. When opened with a specified job and maximum salary, the cursor query selects the employees with that job who are overpaid (for each such employee, the query selects the first and last name and amount overpaid). Next, the example creates a procedure that prints the cursor query result set (for information about procedures, see PL/SQL Subprograms). Finally, the example opens the cursor with one set of actual parameters, prints the result set, closes the cursor, opens the cursor with different actual parameters, prints the result set, and closes the cursor.

Topics

- Formal Cursor Parameters with Default Values
- Adding Formal Cursor Parameters with Default Values

> **See Also**
>
> - "Explicit Cursor Declaration and Definition" for more information about formal cursor parameters
> - "OPEN Statement" for more information about actual cursor parameters

Example 7-11 Explicit Cursor that Accepts Parameters

```
DECLARE
  CURSOR c (job VARCHAR2, max_sal NUMBER) IS
    SELECT last_name, first_name, (salary - max_sal) overpayment
    FROM employees
    WHERE job_id = job
    AND salary > max_sal
    ORDER BY salary;

  PROCEDURE print_overpaid IS
    last_name_   employees.last_name%TYPE;
    first_name_  employees.first_name%TYPE;
    overpayment_      employees.salary%TYPE;
  BEGIN
    LOOP
      FETCH c INTO last_name_, first_name_, overpayment_;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      EXIT WHEN c%NOTFOUND;
      DBMS_OUTPUT.PUT_LINE(last_name_ || ', ' || first_name_ ||
        ' (by ' || overpayment_ || ')');
    END LOOP;
  END print_overpaid;

BEGIN
  DBMS_OUTPUT.PUT_LINE('----------------------');
  DBMS_OUTPUT.PUT_LINE('Overpaid Stock Clerks:');
  DBMS_OUTPUT.PUT_LINE('----------------------');
  OPEN c('ST_CLERK', 5000);
  print_overpaid;
  CLOSE c;

  DBMS_OUTPUT.PUT_LINE('------------------------------');
  DBMS_OUTPUT.PUT_LINE('Overpaid Sales Representatives:');
  DBMS_OUTPUT.PUT_LINE('------------------------------');
  OPEN c('SA_REP', 10000);
  print_overpaid;
  CLOSE c;
END;
/
```

Result:

```
----------------------
Overpaid Stock Clerks:
----------------------
------------------------------
Overpaid Sales Representatives:
------------------------------
Vishney, Clara (by 500)
Abel, Ellen (by 1000)
Ozer, Lisa (by 1500)

PL/SQL procedure successfully completed.
```

Formal Cursor Parameters with Default Values

When you create an explicit cursor with formal parameters, you can specify default values for them. When a formal parameter has a default value, its corresponding actual parameter is optional. If you open the cursor without specifying the actual parameter, then the formal parameter has its default value.

Example 7-12 creates an explicit cursor whose formal parameter represents a location ID. The default value of the parameter is the location ID of company headquarters.

Example 7-12 Cursor Parameters with Default Values

```
DECLARE
  CURSOR c (location NUMBER DEFAULT 1700) IS
    SELECT d.department_name,
           e.last_name manager,
           l.city
    FROM departments d, employees e, locations l
    WHERE l.location_id = location
      AND l.location_id = d.location_id
      AND d.department_id = e.department_id
    ORDER BY d.department_id;

  PROCEDURE print_depts IS
    dept_name  departments.department_name%TYPE;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    mgr_name   employees.last_name%TYPE;
    city_name  locations.city%TYPE;
  BEGIN
    LOOP
      FETCH c INTO dept_name, mgr_name, city_name;
      EXIT WHEN c%NOTFOUND;
      DBMS_OUTPUT.PUT_LINE(dept_name || ' (Manager: ' || mgr_name || ')');
    END LOOP;
  END print_depts;

BEGIN
  DBMS_OUTPUT.PUT_LINE('DEPARTMENTS AT HEADQUARTERS:');
  DBMS_OUTPUT.PUT_LINE('-------------------------------');
  OPEN c;
  print_depts;
  DBMS_OUTPUT.PUT_LINE('-------------------------------');
  CLOSE c;

  DBMS_OUTPUT.PUT_LINE('DEPARTMENTS IN CANADA:');
  DBMS_OUTPUT.PUT_LINE('-------------------------------');
  OPEN c(1800); -- Toronto
  print_depts;
  CLOSE c;
  OPEN c(1900); -- Whitehorse
  print_depts;
  CLOSE c;
END;
/
```

Result is similar to:

```
DEPARTMENTS AT HEADQUARTERS:
-------------------------------
Administration (Manager: Whalen)
Purchasing (Manager: Himuro)
Purchasing (Manager: Tobias)
Purchasing (Manager: Baida)
Purchasing (Manager: Li)
Purchasing (Manager: Colmenares)
Purchasing (Manager: Khoo)
Executive (Manager: Yang)
Executive (Manager: Garcia)
Executive (Manager: King)
Finance (Manager: Urman)
Finance (Manager: Sciarra)
Finance (Manager: Chen)
Finance (Manager: Faviet)
Finance (Manager: Gruenberg)
Finance (Manager: Popp)
Accounting (Manager: Higgins)
Accounting (Manager: Gietz)
-------------------------------
DEPARTMENTS IN CANADA:
-------------------------------
Marketing (Manager: Davis)
Marketing (Manager: Martinez)

PL/SQL procedure successfully completed.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Adding Formal Cursor Parameters with Default Values

If you add formal parameters to a cursor, and you specify default values for the added parameters, then you need not change existing references to the cursor. Compare Example 7-13 to Example 7-11.

Example 7-13 Adding Formal Parameter to Existing Cursor

```
DECLARE
  CURSOR c (job VARCHAR2, max_sal NUMBER,
            hired DATE DEFAULT TO_DATE('31-DEC-1999', 'DD-MON-YYYY')) IS
    SELECT last_name, first_name, (salary - max_sal) overpayment
    FROM employees
    WHERE job_id = job
    AND salary > max_sal
    AND hire_date > hired
    ORDER BY salary;

  PROCEDURE print_overpaid IS
    last_name_   employees.last_name%TYPE;
    first_name_  employees.first_name%TYPE;
    overpayment_      employees.salary%TYPE;
  BEGIN
    LOOP
      FETCH c INTO last_name_, first_name_, overpayment_;
      EXIT WHEN c%NOTFOUND;
      DBMS_OUTPUT.PUT_LINE(last_name_ || ', ' || first_name_ ||
        ' (by ' || overpayment_ || ')');
    END LOOP;
  END print_overpaid;

BEGIN
  DBMS_OUTPUT.PUT_LINE('------------------------------');
  DBMS_OUTPUT.PUT_LINE('Overpaid Sales Representatives:');
  DBMS_OUTPUT.PUT_LINE('------------------------------');
  OPEN c('SA_REP', 10000);  -- existing reference
  print_overpaid;
  CLOSE c;

  DBMS_OUTPUT.PUT_LINE('-----------------------------------------------');
  DBMS_OUTPUT.PUT_LINE('Overpaid Sales Representatives Hired After 2014:');
  DBMS_OUTPUT.PUT_LINE('-----------------------------------------------');
  OPEN c('SA_REP', 10000, TO_DATE('31-DEC-2014', 'DD-MON-YYYY'));
                        -- new reference
  print_overpaid;
  CLOSE c;
END;
/
```

Result:

```
------------------------------
Overpaid Sales Representatives:
------------------------------
Vishney, Clara (by 500)
Abel, Ellen (by 1000)
Ozer, Lisa (by 1500)
-----------------------------------------------
Overpaid Sales Representatives Hired After 2014:
-----------------------------------------------
Vishney, Clara (by 500)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Ozer, Lisa (by 1500)

PL/SQL procedure successfully completed.
```

Explicit Cursor Attributes

The syntax for the value of an explicit cursor attribute is *cursor_name* immediately followed by *attribute* (for example, `c1%ISOPEN`).

> **Note**
>
> Explicit cursors and cursor variables (named cursors) have the same attributes. This topic applies to all named cursors except where noted.

The explicit cursor attributes are:

- %ISOPEN Attribute: Is the Cursor Open?
- %FOUND Attribute: Has a Row Been Fetched?
- %NOTFOUND Attribute: Has No Row Been Fetched?
- %ROWCOUNT Attribute: How Many Rows Were Fetched?

If an explicit cursor is not open, referencing any attribute except `%ISOPEN` raises the predefined exception `INVALID_CURSOR`.

> **See Also**
>
> "Named Cursor Attribute" for complete syntax and semantics of named cursor (explicit cursor and cursor variable) attributes

%ISOPEN Attribute: Is the Cursor Open?

`%ISOPEN` returns `TRUE` if its explicit cursor is open; `FALSE` otherwise.

`%ISOPEN` is useful for:

- Checking that an explicit cursor is not already open before you try to open it.

  If you try to open an explicit cursor that is already open, PL/SQL raises the predefined exception `CURSOR_ALREADY_OPEN`. You must close an explicit cursor before you can reopen it.

  > **Note**
  >
  > The preceding paragraph does not apply to cursor variables.

- Checking that an explicit cursor is open before you try to close it.

Example 7-14 opens the explicit cursor `c1` only if it is not open and closes it only if it is open.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 7-14 %ISOPEN Explicit Cursor Attribute

```
DECLARE
  CURSOR c1 IS
    SELECT last_name, salary FROM employees
    WHERE ROWNUM < 11;

  the_name employees.last_name%TYPE;
  the_salary employees.salary%TYPE;
BEGIN
  IF NOT c1%ISOPEN THEN
    OPEN c1;
  END IF;

  FETCH c1 INTO the_name, the_salary;

  IF c1%ISOPEN THEN
    CLOSE c1;
  END IF;
END;
/
```

%FOUND Attribute: Has a Row Been Fetched?

`%FOUND` returns:

- `NULL` after the explicit cursor is opened but before the first fetch
- `TRUE` if the most recent fetch from the explicit cursor returned a row
- `FALSE` otherwise

`%FOUND` is useful for determining whether there is a fetched row to process.

Example 7-15 loops through a result set, printing each fetched row and exiting when there are no more rows to fetch.

Example 7-15 %FOUND Explicit Cursor Attribute

```
DECLARE
  CURSOR c1 IS
    SELECT last_name, salary FROM employees
    WHERE ROWNUM < 11
    ORDER BY last_name;

  my_ename   employees.last_name%TYPE;
  my_salary  employees.salary%TYPE;
BEGIN
  OPEN c1;
  LOOP
    FETCH c1 INTO my_ename, my_salary;
    IF c1%FOUND THEN  -- fetch succeeded
      DBMS_OUTPUT.PUT_LINE('Name = ' || my_ename || ', salary = ' || my_salary);
    ELSE  -- fetch failed
      EXIT;
    END IF;
  END LOOP;
END;
/
```

Result:

```
Name = Faviet, salary = 9000
Name = Garcia, salary = 17000
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Name = Gruenberg, salary = 12008
Name = Jackson, salary = 4800
Name = James, salary = 9000
Name = King, salary = 24000
Name = Miller, salary = 6000
Name = Nguyen, salary = 4200
Name = Williams, salary = 4800
Name = Yang, salary = 17000
```

%NOTFOUND Attribute: Has No Row Been Fetched?

`%NOTFOUND` (the logical opposite of `%FOUND`) returns:

- `NULL` after the explicit cursor is opened but before the first fetch
- `FALSE` if the most recent fetch from the explicit cursor returned a row
- `TRUE` otherwise

`%NOTFOUND` is useful for exiting a loop when `FETCH` fails to return a row, as in Example 7-16.

Example 7-16 %NOTFOUND Explicit Cursor Attribute

```
DECLARE
  CURSOR c1 IS
    SELECT last_name, salary FROM employees
    WHERE ROWNUM < 11
    ORDER BY last_name;

   my_ename   employees.last_name%TYPE;
   my_salary  employees.salary%TYPE;
BEGIN
  OPEN c1;
  LOOP
    FETCH c1 INTO my_ename, my_salary;
    IF c1%NOTFOUND THEN -- fetch failed
      EXIT;
    ELSE  -- fetch succeeded
      DBMS_OUTPUT.PUT_LINE
        ('Name = ' || my_ename || ', salary = ' || my_salary);
    END IF;
  END LOOP;
END;
/
```

Result:

```
Name = Faviet, salary = 9000
Name = Garcia, salary = 17000
Name = Gruenberg, salary = 12008
Name = Jackson, salary = 4800
Name = James, salary = 9000
Name = King, salary = 24000
Name = Miller, salary = 6000
Name = Nguyen, salary = 4200
Name = Williams, salary = 4800
Name = Yang, salary = 17000
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

%ROWCOUNT Attribute: How Many Rows Were Fetched?

`%ROWCOUNT` returns:

- Zero after the explicit cursor is opened but before the first fetch
- Otherwise, the number of rows fetched (an `INTEGER`)

> **Note**
>
> If a server is Oracle Database 12*c* or later and its client is Oracle Database 11*g*2 or earlier (or the reverse), then the maximum number that `SQL%ROWCOUNT` returns is 4,294,967,295.

Example 7-17 numbers and prints the rows that it fetches and prints a message after fetching the fifth row.

Example 7-17 %ROWCOUNT Explicit Cursor Attribute

```
DECLARE
  CURSOR c1 IS
    SELECT last_name FROM employees
    WHERE ROWNUM < 11
    ORDER BY last_name;

  name  employees.last_name%TYPE;
BEGIN
  OPEN c1;
  LOOP
    FETCH c1 INTO name;
    EXIT WHEN c1%NOTFOUND OR c1%NOTFOUND IS NULL;
    DBMS_OUTPUT.PUT_LINE(c1%ROWCOUNT || '. ' || name);
    IF c1%ROWCOUNT = 5 THEN
       DBMS_OUTPUT.PUT_LINE('--- Fetched 5th row ---');
    END IF;
  END LOOP;
  CLOSE c1;
END;
/
```

Result:

```
1. Abel
2. Ande
3. Atkinson
4. Baida
5. Banda
--- Fetched 5th row ---
6. Bates
7. Bell
8. Bernstein
9. Bissot
10. Bloom
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Processing Query Result Sets

In PL/SQL, as in traditional database programming, you use cursors to process query result sets. However, in PL/SQL, you can use either implicit or explicit cursors.

The former need less code, but the latter are more flexible. For example, explicit cursors can accept parameters.

The following PL/SQL statements use implicit cursors that PL/SQL defines and manages for you:

- `SELECT INTO`
- Implicit cursor `FOR LOOP`

The following PL/SQL statements use explicit cursors:

- Explicit cursor `FOR LOOP`

  You define the explicit cursor, but PL/SQL manages it while the statement runs.
- `OPEN`, `FETCH`, and `CLOSE`

  You define and manage the explicit cursor.

> **Note**
>
> If a query returns no rows, PL/SQL raises the exception `NO_DATA_FOUND`.

Topics

- Processing Query Result Sets With SELECT INTO Statements
- Processing Query Result Sets With Cursor FOR LOOP Statements
- Processing Query Result Sets With Explicit Cursors, OPEN, FETCH, and CLOSE
- Processing Query Result Sets with Subqueries

> **See Also**
>
> - "Explicit Cursors that Accept Parameters"
> - *Oracle Database Development Guide* for information about returning result sets to clients
> - "Exception Handler" for information about handling exceptions

Copyright © 1996, 2025, Oracle and/or its affiliates.

Processing Query Result Sets With SELECT INTO Statements

Using an implicit cursor, the `SELECT INTO` statement retrieves values from one or more database tables (as the SQL `SELECT` statement does) and stores them in variables (which the SQL `SELECT` statement does not do).

Topics

- Handling Single-Row Result Sets
- Handling Large Multiple-Row Result Sets

> **See Also**
>
> "SELECT INTO Statement" for its complete syntax and semantics

Handling Single-Row Result Sets

If you expect the query to return only one row, then use the `SELECT INTO` statement to store values from that row in either one or more scalar variables, or one record variable.

If the query might return multiple rows, but you care about only the *n*th row, then restrict the result set to that row with the clause `WHERE ROWNUM=`*n*.

> **See Also**
>
> - "Assigning Values to Variables with the SELECT INTO Statement"
> - "Using SELECT INTO to Assign a Row to a Record Variable"
> - *Oracle Database SQL Language Reference* for more information about the `ROWNUM` pseudocolumn

Handling Large Multiple-Row Result Sets

If you must assign a large quantity of table data to variables, Oracle recommends using the `SELECT INTO` statement with the `BULK COLLECT` clause.

This statement retrieves an entire result set into one or more collection variables.

For more information, see "SELECT INTO Statement with BULK COLLECT Clause".

Processing Query Result Sets With Cursor FOR LOOP Statements

The cursor `FOR LOOP` statement lets you run a `SELECT` statement and then immediately loop through the rows of the result set.

This statement can use either an implicit or explicit cursor (but not a cursor variable).

If you use the `SELECT` statement only in the cursor `FOR LOOP` statement, then specify the `SELECT` statement inside the cursor `FOR LOOP` statement. This form of the cursor `FOR LOOP` statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

uses an implicit cursor, and is called an **implicit cursor `FOR LOOP` statement**. Because the implicit cursor is internal to the statement, you cannot reference it with the name `SQL`.

If you use the `SELECT` statement multiple times in the same PL/SQL unit, then define an explicit cursor for it and specify that cursor in the cursor `FOR LOOP` statement. This form of the cursor `FOR LOOP` statement is called an **explicit cursor `FOR LOOP` statement**. You can use the same explicit cursor elsewhere in the same PL/SQL unit.

The cursor `FOR LOOP` statement implicitly declares its loop index as a `%ROWTYPE` record variable of the type that its cursor returns. This record is local to the loop and exists only during loop execution. Statements inside the loop can reference the record and its fields. They can reference virtual columns only by aliases.

After declaring the loop index record variable, the `FOR LOOP` statement opens the specified cursor. With each iteration of the loop, the `FOR LOOP` statement fetches a row from the result set and stores it in the record. When there are no more rows to fetch, the cursor `FOR LOOP` statement closes the cursor. The cursor also closes if a statement inside the loop transfers control outside the loop or if PL/SQL raises an exception.

> **See Also**
>
> "Cursor FOR LOOP Statement" for its complete syntax and semantics

> **Note**
>
> When an exception is raised inside a cursor `FOR LOOP` statement, the cursor closes before the exception handler runs. Therefore, the values of explicit cursor attributes are not available in the handler.

Example 7-18 Implicit Cursor FOR LOOP Statement

In this example, an implicit cursor `FOR LOOP` statement prints the last name and job ID of every clerk whose manager has an ID greater than 120.

```
BEGIN
  FOR item IN (
    SELECT last_name, job_id
    FROM employees
    WHERE job_id LIKE '%CLERK%'
    AND manager_id > 120
    ORDER BY last_name
  )
  LOOP
    DBMS_OUTPUT.PUT_LINE
      ('Name = ' || item.last_name || ', Job = ' || item.job_id);
  END LOOP;
END;
/
```

Result:

```
Name = Atkinson, Job = ST_CLERK
Name = Bell, Job = SH_CLERK
Name = Bissot, Job = ST_CLERK
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
...
Name = Walsh, Job = SH_CLERK
```

Example 7-19 Explicit Cursor FOR LOOP Statement

This example is like Example 7-18, except that it uses an explicit cursor `FOR LOOP` statement.

```
DECLARE
  CURSOR c1 IS
    SELECT last_name, job_id FROM employees
    WHERE job_id LIKE '%CLERK%' AND manager_id > 120
    ORDER BY last_name;
BEGIN
  FOR item IN c1
  LOOP
    DBMS_OUTPUT.PUT_LINE
      ('Name = ' || item.last_name || ', Job = ' || item.job_id);
  END LOOP;
END;
/
```

Result:

```
Name = Atkinson, Job = ST_CLERK
Name = Bell, Job = SH_CLERK
Name = Bissot, Job = ST_CLERK
...
Name = Walsh, Job = SH_CLERK
```

Example 7-20 Passing Parameters to Explicit Cursor FOR LOOP Statement

This example declares and defines an explicit cursor that accepts two parameters, and then uses it in an explicit cursor `FOR LOOP` statement to display the wages paid to employees who earn more than a specified wage in a specified department.

```
DECLARE
  CURSOR c1 (job VARCHAR2, max_wage NUMBER) IS
    SELECT * FROM employees
    WHERE job_id = job
    AND salary > max_wage;
BEGIN
  FOR person IN c1('ST_CLERK', 3000)
  LOOP
     -- process data record
    DBMS_OUTPUT.PUT_LINE (
      'Name = ' || person.last_name || ', salary = ' ||
      person.salary || ', Job Id = ' || person.job_id
    );
  END LOOP;
END;
/
```

Result:

```
Name = Nayer, salary = 3200, Job Id = ST_CLERK
Name = Bissot, salary = 3300, Job Id = ST_CLERK
Name = Mallin, salary = 3300, Job Id = ST_CLERK
Name = Ladwig, salary = 3600, Job Id = ST_CLERK
Name = Stiles, salary = 3200, Job Id = ST_CLERK
Name = Rajs, salary = 3500, Job Id = ST_CLERK
Name = Davies, salary = 3100, Job Id = ST_CLERK
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 7-21 Cursor FOR Loop References Virtual Columns

In this example, the implicit cursor `FOR LOOP` references virtual columns by their aliases, `full_name` and `dream_salary`.

```
BEGIN
  FOR item IN (
    SELECT first_name || ' ' || last_name AS full_name,
           salary * 10                    AS dream_salary
    FROM employees
    WHERE ROWNUM <= 5
    ORDER BY dream_salary DESC, last_name ASC
  ) LOOP
    DBMS_OUTPUT.PUT_LINE
      (item.full_name || ' dreams of making ' || item.dream_salary);
  END LOOP;
END;
/
```

Result:

```
Stephen King dreams of making 240000
Lex Garcia dreams of making 170000
Neena Yang dreams of making 170000
Alexander James dreams of making 90000
Bruce Miller dreams of making 60000
```

Processing Query Result Sets With Explicit Cursors, OPEN, FETCH, and CLOSE

For full control over query result set processing, declare explicit cursors and manage them with the statements OPEN, FETCH, and CLOSE.

This result set processing technique is more complicated than the others, but it is also more flexible. For example, you can:

- Process multiple result sets in parallel, using multiple cursors.
- Process multiple rows in a single loop iteration, skip rows, or split the processing into multiple loops.
- Specify the query in one PL/SQL unit but retrieve the rows in another.

For instructions and examples, see "Explicit Cursors".

Processing Query Result Sets with Subqueries

If you process a query result set by looping through it and running another query for each row, then you can improve performance by removing the second query from inside the loop and making it a subquery of the first query.

While an ordinary subquery is evaluated for each table, a **correlated subquery** is evaluated for each row.

For more information about subqueries, see *Oracle Database SQL Language Reference*.

Example 7-22 Subquery in FROM Clause of Parent Query

This example defines explicit cursor `c1` with a query whose `FROM` clause contains a subquery.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  CURSOR c1 IS
    SELECT t1.department_id, department_name, staff
    FROM departments t1,
         ( SELECT department_id, COUNT(*) AS staff
           FROM employees
           GROUP BY department_id
         ) t2
    WHERE (t1.department_id = t2.department_id) AND staff >= 5
    ORDER BY staff;

BEGIN
   FOR dept IN c1
   LOOP
     DBMS_OUTPUT.PUT_LINE ('Department = '
       || dept.department_name || ', staff = ' || dept.staff);
   END LOOP;
END;
/
```

Result:

```
Department = IT, staff = 5
Department = Finance, staff = 6
Department = Purchasing, staff = 6
Department = Sales, staff = 34
Department = Shipping, staff = 45
```

Example 7-23 Correlated Subquery

This example returns the name and salary of each employee whose salary exceeds the departmental average. For each row in the table, the correlated subquery computes the average salary for the corresponding department.

```
DECLARE
  CURSOR c1 IS
    SELECT department_id, last_name, salary
    FROM employees t
    WHERE salary > ( SELECT AVG(salary)
                     FROM employees
                     WHERE t.department_id = department_id
                   )
    ORDER BY department_id, last_name;
BEGIN
  FOR person IN c1
  LOOP
    DBMS_OUTPUT.PUT_LINE('Making above-average salary = ' || person.last_name);
  END LOOP;
END;
/
```

Result:

```
Making above-average salary = Martinez
Making above-average salary = Li
Making above-average salary = Bell
...
Making above-average salary = Higgins
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Cursor Variables

A **cursor variable** is like an explicit cursor, except that:

- It is not limited to one query.

  You can open a cursor variable for a query, process the result set, and then use the cursor variable for another query.
- You can assign a value to it.
- You can use it in an expression.
- It can be a subprogram parameter.

  You can use cursor variables to pass query result sets between subprograms.
- It can be a host variable.

  You can use cursor variables to pass query result sets between PL/SQL stored subprograms and their clients.
- It cannot accept parameters.

  You cannot pass parameters to a cursor variable, but you can pass whole queries to it. The queries can include variables.

A cursor variable has this flexibility because it is a pointer; that is, its value is the address of an item, not the item itself.

Before you can reference a cursor variable, you must make it point to a SQL work area, either by opening it or by assigning it the value of an open PL/SQL cursor variable or open host cursor variable.

> **Note**
>
> Cursor variables and explicit cursors are not interchangeable—you cannot use one where the other is expected.

Topics

- Creating Cursor Variables
- Opening and Closing Cursor Variables
- Fetching Data with Cursor Variables
- Assigning Values to Cursor Variables
- Variables in Cursor Variable Queries
- Querying a Collection
- Cursor Variable Attributes
- Cursor Variables as Subprogram Parameters
- Cursor Variables as Host Variables

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - "Explicit Cursors" for more information about explicit cursors
> - "Restrictions on Cursor Variables"
> - *Oracle Database Development Guide* for advantages of cursor variables
> - *Oracle Database Development Guide* for disadvantages of cursor variables

Creating Cursor Variables

To create a cursor variable, either declare a variable of the predefined type `SYS_REFCURSOR` or define a `REF CURSOR` type and then declare a variable of that type.

> **Note**
>
> Informally, a cursor variable is sometimes called a `REF CURSOR`).

The basic syntax of a `REF CURSOR` type definition is:

```
TYPE type_name IS REF CURSOR [ RETURN return_type ]
```

For the complete syntax and semantics, see "Cursor Variable Declaration".

If you specify *`return_type`*, then the `REF CURSOR` type and cursor variables of that type are **strong**; if not, they are **weak**. `SYS_REFCURSOR` and cursor variables of that type are weak.

With a strong cursor variable, you can associate only queries that return the specified type. With a weak cursor variable, you can associate any query.

Weak cursor variables are more error-prone than strong ones, but they are also more flexible. Weak `REF CURSOR` types are interchangeable with each other and with the predefined type `SYS_REFCURSOR`. You can assign the value of a weak cursor variable to any other weak cursor variable.

You can assign the value of a strong cursor variable to another strong cursor variable only if both cursor variables have the same type (not merely the same return type).

> **Note**
>
> You can partition weak cursor variable arguments to table functions only with the `PARTITION BY ANY` clause, not with `PARTITION BY RANGE` or `PARTITION BY HASH`.
>
> For syntax and semantics, see "PARALLEL_ENABLE Clause".

Example 7-24 Cursor Variable Declarations

This example defines strong and weak `REF CURSOR` types, variables of those types, and a variable of the predefined type `SYS_REFCURSOR`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE empcurtyp IS REF CURSOR RETURN employees%ROWTYPE;  -- strong type
  TYPE genericcurtyp IS REF CURSOR;                       -- weak type

  cursor1  empcurtyp;       -- strong cursor variable
  cursor2  genericcurtyp;   -- weak cursor variable
  my_cursor SYS_REFCURSOR;  -- weak cursor variable

  TYPE deptcurtyp IS REF CURSOR RETURN departments%ROWTYPE;  -- strong type
  dept_cv deptcurtyp;  -- strong cursor variable
BEGIN
  NULL;
END;
/
```

Example 7-25 Cursor Variable with User-Defined Return Type

In this example, *EmpRecTyp* is a user-defined RECORD type.

```
DECLARE
  TYPE EmpRecTyp IS RECORD (
    employee_id NUMBER,
    last_name VARCHAR2(25),
    salary   NUMBER(8,2));

  TYPE EmpCurTyp IS REF CURSOR RETURN EmpRecTyp;
  emp_cv EmpCurTyp;
BEGIN
  NULL;
END;
/
```

Opening and Closing Cursor Variables

After declaring a cursor variable, you can open it with the OPEN FOR statement, which does the following:

1. Associates the cursor variable with a query (typically, the query returns multiple rows)

   The query can include placeholders for bind variables, whose values you specify in the USING clause of the OPEN FOR statement.

2. Allocates database resources to process the query
3. Processes the query; that is:
   a. Identifies the result set

      If the query references variables, their values affect the result set. For details, see "Variables in Cursor Variable Queries".

   b. If the query has a FOR UPDATE clause, locks the rows of the result set

      For details, see "SELECT FOR UPDATE and FOR UPDATE Cursors".
4. Positions the cursor before the first row of the result set

You need not close a cursor variable before reopening it (that is, using it in another OPEN FOR statement). After you reopen a cursor variable, the query previously associated with it is lost.

When you no longer need a cursor variable, close it with the CLOSE statement, thereby allowing its resources to be reused. After closing a cursor variable, you cannot fetch records from its result set or reference its attributes. If you try, PL/SQL raises the predefined exception INVALID_CURSOR.

Copyright © 1996, 2025, Oracle and/or its affiliates.

You can reopen a closed cursor variable.

See Also

- "OPEN FOR Statement" for its syntax and semantics
- "CLOSE Statement" for its syntax and semantics

Fetching Data with Cursor Variables

After opening a cursor variable, you can fetch the rows of the query result set with the `FETCH` statement.

The return type of the cursor variable must be compatible with the *`into_clause`* of the `FETCH` statement. If the cursor variable is strong, PL/SQL catches incompatibility at compile time. If the cursor variable is weak, PL/SQL catches incompatibility at run time, raising the predefined exception `ROWTYPE_MISMATCH` before the first fetch.

See Also

- "Fetching Data with Explicit Cursors"
- "FETCH Statement" for its complete syntax and semantics
- "FETCH Statement with BULK COLLECT Clause" for information about `FETCH` statements that return more than one row at a time

Example 7-26 Fetching Data with Cursor Variables

This example uses one cursor variable to do what Example 7-6 does with two explicit cursors. The first `OPEN FOR` statement includes the query itself. The second `OPEN FOR` statement references a variable whose value is a query.

```
DECLARE
  cv SYS_REFCURSOR;  -- cursor variable

  v_lastname  employees.last_name%TYPE;  -- variable for last_name
  v_jobid     employees.job_id%TYPE;     -- variable for job_id

  query_2 VARCHAR2(200) :=
    'SELECT * FROM employees
    WHERE REGEXP_LIKE (job_id, ''[ACADFIMKSA]_M[ANGR]'')
    ORDER BY job_id';

  v_employees employees%ROWTYPE;  -- record variable row of table

BEGIN
  OPEN cv FOR
    SELECT last_name, job_id FROM employees
    WHERE REGEXP_LIKE (job_id, 'S[HT]_CLERK')
    ORDER BY last_name;

  LOOP  -- Fetches 2 columns into variables
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    FETCH cv INTO v_lastname, v_jobid;
    EXIT WHEN cv%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE( RPAD(v_lastname, 25, ' ') || v_jobid );
  END LOOP;

  DBMS_OUTPUT.PUT_LINE( '-----------------------------------' );

  OPEN cv FOR query_2;

  LOOP  -- Fetches entire row into the v_employees record
    FETCH cv INTO v_employees;
    EXIT WHEN cv%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE( RPAD(v_employees.last_name, 25, ' ') ||
                               v_employees.job_id );
  END LOOP;

  CLOSE cv;
END;
/
```

Result:

```
Atkinson                  ST_CLERK
Bell                      SH_CLERK
Bissot                    ST_CLERK
...
Walsh                     SH_CLERK
-----------------------------------
Higgins                   AC_MGR
Gruenberg                 FI_MGR
Martinez                  MK_MAN
...
Errazuriz                 SA_MAN
```

Example 7-27 Fetching from Cursor Variable into Collections

This example fetches from a cursor variable into two collections (nested tables), using the `BULK COLLECT` clause of the `FETCH` statement.

```
DECLARE
  TYPE empcurtyp IS REF CURSOR;
  TYPE namelist IS TABLE OF employees.last_name%TYPE;
  TYPE sallist IS TABLE OF employees.salary%TYPE;
  emp_cv  empcurtyp;
  names   namelist;
  sals    sallist;
BEGIN
  OPEN emp_cv FOR
    SELECT last_name, salary FROM employees
    WHERE job_id = 'SA_REP'
    ORDER BY salary DESC;

  FETCH emp_cv BULK COLLECT INTO names, sals;
  CLOSE emp_cv;
  -- loop through the names and sals collections
  FOR i IN names.FIRST .. names.LAST
  LOOP
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    DBMS_OUTPUT.PUT_LINE
      ('Name = ' || names(i) || ', salary = ' || sals(i));
  END LOOP;
END;
/
```

Result:

```
Name = Ozer, salary = 11500
Name = Abel, salary = 11000
Name = Vishney, salary = 10500
...
Name = Kumar, salary = 6100
```

Assigning Values to Cursor Variables

You can assign to a PL/SQL cursor variable the value of another PL/SQL cursor variable or host cursor variable.

The syntax is:

```
target_cursor_variable := source_cursor_variable;
```

If *source_cursor_variable* is open, then after the assignment, *target_cursor_variable* is also open. The two cursor variables point to the same SQL work area.

If *source_cursor_variable* is not open, opening *target_cursor_variable* after the assignment does not open *source_cursor_variable*.

Variables in Cursor Variable Queries

The query associated with a cursor variable can reference any variable in its scope.

When you open a cursor variable with the `OPEN FOR` statement, PL/SQL evaluates any variables in the query and uses those values when identifying the result set. Changing the values of the variables later does not change the result set.

To change the result set, you must change the value of the variable and then open the cursor variable again for the same query, as in Example 7-29.

Example 7-28 Variable in Cursor Variable Query—No Result Set Change

This example opens a cursor variable for a query that references the variable `factor`, which has the value 2. Therefore, `sal_multiple` is always 2 times `sal`, despite that `factor` is incremented after every fetch.

```
DECLARE
  sal           employees.salary%TYPE;
  sal_multiple  employees.salary%TYPE;
  factor        INTEGER := 2;

  cv SYS_REFCURSOR;

BEGIN
  OPEN cv FOR
    SELECT salary, salary*factor
    FROM employees
    WHERE job_id LIKE 'AD_%';   -- PL/SQL evaluates factor

  LOOP
    FETCH cv INTO sal, sal_multiple;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    EXIT WHEN cv%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('factor = ' || factor);
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
    factor := factor + 1;  -- Does not affect sal_multiple
  END LOOP;

  CLOSE cv;
END;
/
```

Result:

```
factor = 2
sal          = 4400
sal_multiple = 8800
factor = 3
sal          = 24000
sal_multiple = 48000
factor = 4
sal          = 17000
sal_multiple = 34000
factor = 5
sal          = 17000
sal_multiple = 34000
```

Example 7-29 Variable in Cursor Variable Query—Result Set Change

```
DECLARE
  sal           employees.salary%TYPE;
  sal_multiple  employees.salary%TYPE;
  factor        INTEGER := 2;

  cv SYS_REFCURSOR;

BEGIN
  DBMS_OUTPUT.PUT_LINE('factor = ' || factor);

  OPEN cv FOR
    SELECT salary, salary*factor
    FROM employees
    WHERE job_id LIKE 'AD_%';   -- PL/SQL evaluates factor

  LOOP
    FETCH cv INTO sal, sal_multiple;
    EXIT WHEN cv%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
  END LOOP;

  factor := factor + 1;

  DBMS_OUTPUT.PUT_LINE('factor = ' || factor);

  OPEN cv FOR
    SELECT salary, salary*factor
    FROM employees
    WHERE job_id LIKE 'AD_%';   -- PL/SQL evaluates factor

  LOOP
    FETCH cv INTO sal, sal_multiple;
    EXIT WHEN cv%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('sal          = ' || sal);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    DBMS_OUTPUT.PUT_LINE('sal_multiple = ' || sal_multiple);
  END LOOP;

  CLOSE cv;
END;
/
```

Result:

```
factor = 2
sal          = 4400
sal_multiple = 8800
sal          = 24000
sal_multiple = 48000
sal          = 17000
sal_multiple = 34000
sal          = 17000
sal_multiple = 34000
factor = 3
sal          = 4400
sal_multiple = 13200
sal          = 24000
sal_multiple = 72000
sal          = 17000
sal_multiple = 51000
sal          = 17000
sal_multiple = 51000
```

Querying a Collection

You can query a collection if all of the following are true:

- The data type of the collection was either created at schema level or declared in a package specification.
- The data type of the collection element is either a scalar data type, a user-defined type, or a record type.

In the query `FROM` clause, the collection appears in *`table_collection_expression`* as the argument of the `TABLE` operator.

> **Note**
>
> In SQL contexts, you cannot use a function whose return type was declared in a package specification.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database SQL Language Reference* for information about the *table_collection_expression*
- "CREATE PACKAGE Statement" for information about the CREATE PACKAGE statement
- "PL/SQL Collections and Records" for information about collection types and collection variables
- Example 8-9, "Querying a Collection with Native Dynamic SQL"

Example 7-30 Querying a Collection with Static SQL

In this example, the cursor variable is associated with a query on an associative array of records. The nested table type, mytab, is declared in a package specification.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS
  TYPE rec IS RECORD(f1 NUMBER, f2 VARCHAR2(30));
  TYPE mytab IS TABLE OF rec INDEX BY pls_integer;
END;
/

DECLARE
  v1 pkg.mytab;  -- collection of records
  v2 pkg.rec;
  c1 SYS_REFCURSOR;
BEGIN
  v1(1).f1 := 1;
  v1(1).f2 := 'one';
  OPEN c1 FOR SELECT * FROM TABLE(v1);
  FETCH c1 INTO v2;
  CLOSE c1;
  DBMS_OUTPUT.PUT_LINE('Values in record are ' || v2.f1 || ' and ' || v2.f2);
END;
/
```

Result:

```
Values in record are 1 and one
```

Cursor Variable Attributes

A cursor variable has the same attributes as an explicit cursor (see Explicit Cursor Attributes.). The syntax for the value of a cursor variable attribute is *cursor_variable_name* immediately followed by *attribute* (for example, cv%ISOPEN). If a cursor variable is not open, referencing any attribute except %ISOPEN raises the predefined exception INVALID_CURSOR.

Cursor Variables as Subprogram Parameters

You can use a cursor variable as a subprogram parameter, which makes it useful for passing query results between subprograms.

For example:

- You can open a cursor variable in one subprogram and process it in a different subprogram.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- In a multilanguage application, a PL/SQL subprogram can use a cursor variable to return a result set to a subprogram written in a different language.

> **Note**
>
> The invoking and invoked subprograms must be in the same database instance. You cannot pass or return cursor variables to subprograms invoked through database links.

> **Caution**
>
> Because cursor variables are pointers, using them as subprogram parameters increases the likelihood of subprogram parameter aliasing, which can have unintended results. For more information, see "Subprogram Parameter Aliasing with Cursor Variable Parameters".

When declaring a cursor variable as the formal parameter of a subprogram:

- If the subprogram opens or assigns a value to the cursor variable, then the parameter mode must be `IN OUT`.
- If the subprogram only fetches from, or closes, the cursor variable, then the parameter mode can be either `IN` or `IN OUT`.

Corresponding formal and actual cursor variable parameters must have compatible return types. Otherwise, PL/SQL raises the predefined exception `ROWTYPE_MISMATCH`.

To pass a cursor variable parameter between subprograms in different PL/SQL units, define the `REF CURSOR` type of the parameter in a package. When the type is in a package, multiple subprograms can use it. One subprogram can declare a formal parameter of that type, and other subprograms can declare variables of that type and pass them to the first subprogram.

> **See Also**
>
> -
> - "Subprogram Parameters" for more information about subprogram parameters
> - "CURSOR Expressions" for information about `CURSOR` expressions, which can be actual parameters for formal cursor variable parameters
> - PL/SQL Packages, for more information about packages

Example 7-31 Procedure to Open Cursor Variable for One Query

This example defines, in a package, a `REF CURSOR` type and a procedure that opens a cursor variable parameter of that type.

```
CREATE OR REPLACE PACKAGE emp_data AUTHID DEFINER AS
  TYPE empcurtyp IS REF CURSOR RETURN employees%ROWTYPE;
  PROCEDURE open_emp_cv (emp_cv IN OUT empcurtyp);
END emp_data;
/
CREATE OR REPLACE PACKAGE BODY emp_data AS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PROCEDURE open_emp_cv (emp_cv IN OUT EmpCurTyp) IS
  BEGIN
    OPEN emp_cv FOR SELECT * FROM employees;
  END open_emp_cv;
END emp_data;
/
```

Example 7-32 Opening Cursor Variable for Chosen Query (Same Return Type)

In this example ,the stored procedure opens its cursor variable parameter for a chosen query. The queries have the same return type.

```
CREATE OR REPLACE PACKAGE emp_data AUTHID DEFINER AS
  TYPE empcurtyp IS REF CURSOR RETURN employees%ROWTYPE;
  PROCEDURE open_emp_cv (emp_cv IN OUT empcurtyp, choice INT);
END emp_data;
/
CREATE OR REPLACE PACKAGE BODY emp_data AS
  PROCEDURE open_emp_cv (emp_cv IN OUT empcurtyp, choice INT) IS
  BEGIN
    IF choice = 1 THEN
      OPEN emp_cv FOR SELECT *
      FROM employees
      WHERE commission_pct IS NOT NULL;
    ELSIF choice = 2 THEN
      OPEN emp_cv FOR SELECT *
      FROM employees
      WHERE salary > 2500;
    ELSIF choice = 3 THEN
      OPEN emp_cv FOR SELECT *
      FROM employees
      WHERE department_id = 100;
    END IF;
  END;
END emp_data;
/
```

Example 7-33 Opening Cursor Variable for Chosen Query (Different Return Types)

In this example,the stored procedure opens its cursor variable parameter for a chosen query. The queries have the different return types.

```
CREATE OR REPLACE PACKAGE admin_data AUTHID DEFINER AS
  TYPE gencurtyp IS REF CURSOR;
  PROCEDURE open_cv (generic_cv IN OUT gencurtyp, choice INT);
END admin_data;
/
CREATE OR REPLACE PACKAGE BODY admin_data AS
  PROCEDURE open_cv (generic_cv IN OUT gencurtyp, choice INT) IS
  BEGIN
    IF choice = 1 THEN
      OPEN generic_cv FOR SELECT * FROM employees;
    ELSIF choice = 2 THEN
      OPEN generic_cv FOR SELECT * FROM departments;
    ELSIF choice = 3 THEN
      OPEN generic_cv FOR SELECT * FROM jobs;
    END IF;
  END;
END admin_data;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Cursor Variables as Host Variables

You can use a cursor variable as a host variable, which makes it useful for passing query results between PL/SQL stored subprograms and their clients.

When a cursor variable is a host variable, PL/SQL and the client (the host environment) share a pointer to the SQL work area that stores the result set.

To use a cursor variable as a host variable, declare the cursor variable in the host environment and then pass it as an input host variable (bind variable) to PL/SQL. Host cursor variables are compatible with any query return type (like weak PL/SQL cursor variables).

A SQL work area remains accessible while any cursor variable points to it, even if you pass the value of a cursor variable from one scope to another. For example, in Example 7-34, the Pro*C program passes a host cursor variable to an embedded PL/SQL anonymous block. After the block runs, the cursor variable still points to the SQL work area.

If you have a PL/SQL engine on the client side, calls from client to server impose no restrictions. For example, you can declare a cursor variable on the client side, open and fetch from it on the server side, and continue to fetch from it on the client side. You can also reduce network traffic with a PL/SQL anonymous block that opens or closes several host cursor variables in a single round trip. For example:

```
/* PL/SQL anonymous block in host environment */
BEGIN
  OPEN :emp_cv FOR SELECT * FROM employees;
  OPEN :dept_cv FOR SELECT * FROM departments;
  OPEN :loc_cv FOR SELECT * FROM locations;
END;
/
```

Because the cursor variables still point to the SQL work areas after the PL/SQL anonymous block runs, the client program can use them. When the client program no longer needs the cursors, it can use a PL/SQL anonymous block to close them. For example:

```
/* PL/SQL anonymous block in host environment */
BEGIN
  CLOSE :emp_cv;
  CLOSE :dept_cv;
  CLOSE :loc_cv;
END;
/
```

This technique is useful for populating a multiblock form, as in Oracle Forms. For example, you can open several SQL work areas in a single round trip, like this:

```
/* PL/SQL anonymous block in host environment */
BEGIN
  OPEN :c1 FOR SELECT 1 FROM DUAL;
  OPEN :c2 FOR SELECT 1 FROM DUAL;
  OPEN :c3 FOR SELECT 1 FROM DUAL;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If you bind a host cursor variable into PL/SQL from an Oracle Call Interface (OCI) client, then you cannot fetch from it on the server side unless you also open it there on the same server call.

Example 7-34 Cursor Variable as Host Variable in Pro*C Client Program

In this example, a Pro*C client program declares a cursor variable and a selector and passes them as host variables to a PL/SQL anonymous block, which opens the cursor variable for the selected query.

```
EXEC SQL BEGIN DECLARE SECTION;
  SQL_CURSOR  generic_cv;  -- Declare host cursor variable.
  int         choice;      -- Declare selector.
EXEC SQL END DECLARE SECTION;
EXEC SQL ALLOCATE :generic_cv;  -- Initialize host cursor variable.
-- Pass host cursor variable and selector to PL/SQL block.
/
EXEC SQL EXECUTE
BEGIN
  IF :choice = 1 THEN
    OPEN :generic_cv FOR SELECT * FROM employees;
  ELSIF :choice = 2 THEN
    OPEN :generic_cv FOR SELECT * FROM departments;
  ELSIF :choice = 3 THEN
    OPEN :generic_cv FOR SELECT * FROM jobs;
  END IF;
END;
END-EXEC;
```

CURSOR Expressions

A `CURSOR` expression returns a nested cursor.

It has this syntax:

```
CURSOR ( subquery )
```

You can use a `CURSOR` expression in a `SELECT` statement that is not a subquery (as in Example 7-35) or pass it to a function that accepts a cursor variable parameter (see "Passing CURSOR Expressions to Pipelined Table Functions"). You cannot use a cursor expression with an implicit cursor.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about `CURSOR` expressions, including restrictions

Example 7-35 CURSOR Expression

This example declares and defines an explicit cursor for a query that includes a cursor expression. For each department in the `departments` table, the nested cursor returns the last name of each employee in that department (which it retrieves from the `employees` table).

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE emp_cur_typ IS REF CURSOR;

  emp_cur    emp_cur_typ;
  dept_name  departments.department_name%TYPE;
  emp_name   employees.last_name%TYPE;

  CURSOR c1 IS
    SELECT department_name,
      CURSOR ( SELECT e.last_name
                 FROM employees e
                 WHERE e.department_id = d.department_id
                 ORDER BY e.last_name
               ) employees
    FROM departments d
    WHERE department_name LIKE 'A%'
    ORDER BY department_name;
BEGIN
  OPEN c1;
  LOOP  -- Process each row of query result set
    FETCH c1 INTO dept_name, emp_cur;
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE('Department: ' || dept_name);

    LOOP -- Process each row of subquery result set
      FETCH emp_cur INTO emp_name;
      EXIT WHEN emp_cur%NOTFOUND;
      DBMS_OUTPUT.PUT_LINE('-- Employee: ' || emp_name);
    END LOOP;
  END LOOP;
  CLOSE c1;
END;
/
```

Result:

```
Department: Accounting
-- Employee: Gietz
-- Employee: Higgins
Department: Administration
-- Employee: Whalen
```

Transaction Processing and Control

Transaction processing is an Oracle Database feature that lets multiple users work on the database concurrently, and ensures that each user sees a consistent version of data and that all changes are applied in the right order.

A **transaction** is a sequence of one or more SQL statements that Oracle Database treats as a unit: either all of the statements are performed, or none of them are.

Different users can write to the same data structures without harming each other's data or coordinating with each other, because Oracle Database locks data structures automatically. To maximize data availability, Oracle Database locks the minimum amount of data for the minimum amount of time.

You rarely must write extra code to prevent problems with multiple users accessing data concurrently. However, if you do need this level of control, you can manually override the Oracle Database default locking mechanisms.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- COMMIT Statement
- ROLLBACK Statement
- SAVEPOINT Statement
- Implicit Rollbacks
- SET TRANSACTION Statement
- Overriding Default Locking

See Also

- *Oracle Database Concepts* for more information about transactions
- *Oracle Database Concepts* for more information about transaction processing
- *Oracle Database Concepts* for more information about the Oracle Database locking mechanism
- *Oracle Database Concepts* for more information about manual data locks

COMMIT Statement

The `COMMIT` statement ends the current transaction, making its changes permanent and visible to other users.

Note

A transaction can span multiple blocks, and a block can contain multiple transactions.

The `WRITE` clause of the `COMMIT` statement specifies the priority with which Oracle Database writes to the redo log the information that the commit operation generates.

Note

The default PL/SQL commit behavior for nondistributed transactions is `BATCH NOWAIT` if the `COMMIT_LOGGING` and `COMMIT_WAIT` database initialization parameters have not been set.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database Concepts* for more information about committing transactions
- *Oracle Database Concepts* for information about distributed transactions
- *Oracle Database SQL Language Reference*for information about the `COMMIT` statement
- *Oracle Data Guard Concepts and Administration* for information about ensuring no loss of data during a failover to a standby database

Example 7-36 COMMIT Statement with COMMENT and WRITE Clauses

In this example, a transaction transfers money from one bank account to another. It is important that the money both leaves one account and enters the other, hence the `COMMIT WRITE IMMEDIATE NOWAIT` statement.

```
DROP TABLE accounts;
CREATE TABLE accounts (
  account_id  NUMBER(6),
  balance     NUMBER (10,2)
);

INSERT INTO accounts (account_id, balance)
VALUES (7715, 6350.00);

INSERT INTO accounts (account_id, balance)
VALUES (7720, 5100.50);

CREATE OR REPLACE PROCEDURE transfer (
  from_acct  NUMBER,
  to_acct    NUMBER,
  amount     NUMBER
) AUTHID CURRENT_USER AS
BEGIN
  UPDATE accounts
  SET balance = balance - amount
  WHERE account_id = from_acct;

  UPDATE accounts
  SET balance = balance + amount
  WHERE account_id = to_acct;

  COMMIT WRITE IMMEDIATE NOWAIT;
END;
/
```

Query before transfer:

```
SELECT * FROM accounts;
```

Result:

```
ACCOUNT_ID    BALANCE
---------- ----------
      7715       6350
      7720     5100.5

BEGIN
  transfer(7715, 7720, 250);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Query after transfer:

```
SELECT * FROM accounts;
```

Result:

```
ACCOUNT_ID    BALANCE
---------- ----------
      7715       6100
      7720     5350.5
```

ROLLBACK Statement

The `ROLLBACK` statement ends the current transaction and undoes any changes made during that transaction.

If you make a mistake, such as deleting the wrong row from a table, a rollback restores the original data. If you cannot finish a transaction because a SQL statement fails or PL/SQL raises an exception, a rollback lets you take corrective action and perhaps start over.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about the `ROLLBACK` statement

Example 7-37 ROLLBACK Statement

This example inserts information about an employee into three different tables. If an `INSERT` statement tries to store a duplicate employee number, PL/SQL raises the predefined exception `DUP_VAL_ON_INDEX`. To ensure that changes to all three tables are undone, the exception handler runs a `ROLLBACK`.

```
DROP TABLE emp_name;
CREATE TABLE emp_name AS
  SELECT employee_id, last_name
  FROM employees;

CREATE UNIQUE INDEX empname_ix
ON emp_name (employee_id);


DROP TABLE emp_sal;
CREATE TABLE emp_sal AS
  SELECT employee_id, salary
  FROM employees;

CREATE UNIQUE INDEX empsal_ix
ON emp_sal (employee_id);


DROP TABLE emp_job;
CREATE TABLE emp_job AS
  SELECT employee_id, job_id
  FROM employees;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE UNIQUE INDEX empjobid_ix
ON emp_job (employee_id);


DECLARE
  emp_id        NUMBER(6);
  emp_lastname  VARCHAR2(25);
  emp_salary    NUMBER(8,2);
  emp_jobid     VARCHAR2(10);
BEGIN
  SELECT employee_id, last_name, salary, job_id
  INTO emp_id, emp_lastname, emp_salary, emp_jobid
  FROM employees
  WHERE employee_id = 120;

  INSERT INTO emp_name (employee_id, last_name)
  VALUES (emp_id, emp_lastname);

  INSERT INTO emp_sal (employee_id, salary)
  VALUES (emp_id, emp_salary);

  INSERT INTO emp_job (employee_id, job_id)
  VALUES (emp_id, emp_jobid);

EXCEPTION
  WHEN DUP_VAL_ON_INDEX THEN
    ROLLBACK;
    DBMS_OUTPUT.PUT_LINE('Inserts were rolled back');
END;
/
```

SAVEPOINT Statement

The `SAVEPOINT` statement names and marks the current point in the processing of a transaction.

Savepoints let you roll back part of a transaction instead of the whole transaction. The number of active savepoints for each session is unlimited.

When you roll back to a savepoint, any savepoints marked after that savepoint are erased. The savepoint to which you roll back is not erased. A simple rollback or commit erases all savepoints.

If you mark a savepoint in a recursive subprogram, new instances of the `SAVEPOINT` statement run at each level in the recursive descent, but you can only roll back to the most recently marked savepoint.

Savepoint names are undeclared identifiers. Reusing a savepoint name in a transaction moves the savepoint from its old position to the current point in the transaction, which means that a rollback to the savepoint affects only the current part of the transaction.

See Also

Oracle Database SQL Language Reference for more information about the `SET TRANSACTION` SQL statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 7-38 SAVEPOINT and ROLLBACK Statements

This example marks a savepoint before doing an insert. If the `INSERT` statement tries to store a duplicate value in the `employee_id` column, PL/SQL raises the predefined exception `DUP_VAL_ON_INDEX` and the transaction rolls back to the savepoint, undoing only the `INSERT` statement.

```
DROP TABLE emp_name;
CREATE TABLE emp_name AS
  SELECT employee_id, last_name, salary
  FROM employees;

CREATE UNIQUE INDEX empname_ix
ON emp_name (employee_id);

DECLARE
  emp_id        employees.employee_id%TYPE;
  emp_lastname  employees.last_name%TYPE;
  emp_salary    employees.salary%TYPE;

BEGIN
  SELECT employee_id, last_name, salary
  INTO emp_id, emp_lastname, emp_salary
  FROM employees
  WHERE employee_id = 120;

  UPDATE emp_name
  SET salary = salary * 1.1
  WHERE employee_id = emp_id;

  DELETE FROM emp_name
  WHERE employee_id = 130;

  SAVEPOINT do_insert;

  INSERT INTO emp_name (employee_id, last_name, salary)
  VALUES (emp_id, emp_lastname, emp_salary);

EXCEPTION
  WHEN DUP_VAL_ON_INDEX THEN
    ROLLBACK TO do_insert;
  DBMS_OUTPUT.PUT_LINE('Insert was rolled back');
END;
/
```

Example 7-39 Reusing SAVEPOINT with ROLLBACK

```
DROP TABLE emp_name;
CREATE TABLE emp_name AS
  SELECT employee_id, last_name, salary
  FROM employees;

CREATE UNIQUE INDEX empname_ix
ON emp_name (employee_id);

DECLARE
  emp_id        employees.employee_id%TYPE;
  emp_lastname  employees.last_name%TYPE;
  emp_salary    employees.salary%TYPE;

BEGIN
  SELECT employee_id, last_name, salary
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  INTO emp_id, emp_lastname, emp_salary
  FROM employees
  WHERE employee_id = 120;

  SAVEPOINT my_savepoint;

  UPDATE emp_name
  SET salary = salary * 1.1
  WHERE employee_id = emp_id;

  DELETE FROM emp_name
  WHERE employee_id = 130;

  SAVEPOINT my_savepoint;

  INSERT INTO emp_name (employee_id, last_name, salary)
  VALUES (emp_id, emp_lastname, emp_salary);

EXCEPTION
  WHEN DUP_VAL_ON_INDEX THEN
    ROLLBACK TO my_savepoint;
    DBMS_OUTPUT.PUT_LINE('Transaction rolled back.');
END;
/
```

Implicit Rollbacks

Before running an `INSERT`, `UPDATE`, `DELETE`, or `MERGE` statement, the database marks an implicit savepoint (unavailable to you). If the statement fails, the database rolls back to the savepoint.

Usually, just the failed SQL statement is rolled back, not the whole transaction. If the statement raises an unhandled exception, the host environment determines what is rolled back.

The database can also roll back single SQL statements to break deadlocks. The database signals an error to a participating transaction and rolls back the current statement in that transaction.

Before running a SQL statement, the database must parse it, that is, examine it to ensure it follows syntax rules and refers to valid schema objects. Errors detected while running a SQL statement cause a rollback, but errors detected while parsing the statement do not.

If you exit a stored subprogram with an unhandled exception, PL/SQL does not assign values to `OUT` parameters, and does not do any rollback.

For information about handling exceptions, see PL/SQL Error Handling

SET TRANSACTION Statement

You use the `SET TRANSACTION` statement to begin a read-only or read-write transaction, establish an isolation level, or assign your current transaction to a specified rollback segment.

Read-only transactions are useful for running multiple queries while other users update the same tables.

During a read-only transaction, all queries refer to the same snapshot of the database, providing a multi-table, multi-query, read-consistent view. Other users can continue to query or update data as usual. A commit or rollback ends the transaction.

The `SET TRANSACTION` statement must be the first SQL statement in a read-only transaction and can appear only once in a transaction. If you set a transaction to `READ ONLY`, subsequent

Copyright © 1996, 2025, Oracle and/or its affiliates.

queries see only changes committed before the transaction began. The use of `READ ONLY` does not affect other users or transactions.

Only the `SELECT`, `OPEN`, `FETCH`, `CLOSE`, `LOCK TABLE`, `COMMIT`, and `ROLLBACK` statements are allowed in a read-only transaction. Queries cannot be `FOR UPDATE`.

> **See Also**
>
> *Oracle Database SQL Language Reference* for more information about the SQL statement `SET TRANSACTION`

Example 7-40 SET TRANSACTION Statement in Read-Only Transaction

In this example, a read-only transaction gather order totals for the day, the past week, and the past month. The totals are unaffected by other users updating the database during the transaction. The `orders` table is in the sample schema OE.

```
DECLARE
  daily_order_total    NUMBER(12,2);
  weekly_order_total   NUMBER(12,2);
  monthly_order_total  NUMBER(12,2);
BEGIN
   COMMIT; -- end previous transaction
   SET TRANSACTION READ ONLY NAME 'Calculate Order Totals';

   SELECT SUM (order_total)
   INTO daily_order_total
   FROM orders
   WHERE order_date = SYSDATE;

   SELECT SUM (order_total)
   INTO weekly_order_total
   FROM orders
   WHERE order_date = SYSDATE - 7;

   SELECT SUM (order_total)
   INTO monthly_order_total
   FROM orders
   WHERE order_date = SYSDATE - 30;

   COMMIT; -- ends read-only transaction
END;
/
```

Overriding Default Locking

By default, Oracle Database locks data structures automatically, which lets different applications write to the same data structures without harming each other's data or coordinating with each other.

If you must have exclusive access to data during a transaction, you can override default locking with these SQL statements:

- `LOCK TABLE`, which explicitly locks entire tables.
- `SELECT` with the `FOR UPDATE` clause (`SELECT FOR UPDATE`), which explicitly locks specific rows of a table.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- LOCK TABLE Statement
- SELECT FOR UPDATE and FOR UPDATE Cursors
- Simulating CURRENT OF Clause with ROWID Pseudocolumn

LOCK TABLE Statement

The `LOCK TABLE` statement explicitly locks one or more tables in a specified lock mode so that you can share or deny access to them.

The lock mode determines what other locks can be placed on the table. For example, many users can acquire row share locks on a table at the same time, but only one user at a time can acquire an exclusive lock. While one user has an exclusive lock on a table, no other users can insert, delete, or update rows in that table.

A table lock never prevents other users from querying a table, and a query never acquires a table lock. Only if two different transactions try to modify the same row does one transaction wait for the other to complete. The `LOCK TABLE` statement lets you specify how long to wait for another transaction to complete.

Table locks are released when the transaction that acquired them is either committed or rolled back.

See Also

- *Oracle Database Development Guide* for more information about locking tables explicitly
- *Oracle Database SQL Language Reference* for more information about the `LOCK TABLE` statement

SELECT FOR UPDATE and FOR UPDATE Cursors

The `SELECT` statement with the `FOR UPDATE` clause (`SELECT FOR UPDATE` statement) selects the rows of the result set and locks them. `SELECT FOR UPDATE` lets you base an update on the existing values in the rows, because it ensures that no other user can change those values before you update them. You can also use `SELECT FOR UPDATE` to lock rows that you do not want to update, as in Example 10-6.

Note

In tables compressed with Hybrid Columnar Compression (HCC), DML statements lock compression units rather than rows. HCC, a feature of certain Oracle storage systems, is described in *Oracle Database Concepts*.

By default, the `SELECT FOR UPDATE` statement waits until the requested row lock is acquired. To change this behavior, use the `NOWAIT`, `WAIT`, or `SKIP LOCKED` clause of the `SELECT FOR UPDATE` statement. For information about these clauses, see *Oracle Database SQL Language Reference*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

When SELECT FOR UPDATE is associated with an explicit cursor, the cursor is called a **FOR UPDATE cursor**. Only a FOR UPDATE cursor can appear in the CURRENT OF clause of an UPDATE or DELETE statement. (The CURRENT OF clause, a PL/SQL extension to the WHERE clause of the SQL statements UPDATE and DELETE, restricts the statement to the current row of the cursor.)

When SELECT FOR UPDATE queries multiple tables, it locks only rows whose columns appear in the FOR UPDATE clause.

Simulating CURRENT OF Clause with ROWID Pseudocolumn

The rows of the result set are locked when you open a FOR UPDATE cursor, not as they are fetched. The rows are unlocked when you commit or roll back the transaction. After the rows are unlocked, you cannot fetch from the FOR UPDATE cursor, as Example 7-41 shows (the result is the same if you substitute ROLLBACK for COMMIT).

The workaround is to simulate the CURRENT OF clause with the ROWID pseudocolumn (described in *Oracle Database SQL Language Reference*). Select the rowid of each row into a UROWID variable and use the rowid to identify the current row during subsequent updates and deletes, as in Example 7-42. (To print the value of a UROWID variable, convert it to VARCHAR2, using the ROWIDTOCHAR function described in *Oracle Database SQL Language Reference*.)

> **Note**
>
> When you update a row in a table compressed with Hybrid Columnar Compression (HCC), the ROWID of the row changes. HCC, a feature of certain Oracle storage systems, is described in *Oracle Database Concepts*.

> **Caution**
>
> Because no FOR UPDATE clause locks the fetched rows, other users might unintentionally overwrite your changes.

> **Note**
>
> The extra space needed for read consistency is not released until the cursor is closed, which can slow down processing for large updates.

Example 7-41 FETCH with FOR UPDATE Cursor After COMMIT Statement

```
DROP TABLE emp;
CREATE TABLE emp AS SELECT * FROM employees;

DECLARE
  CURSOR c1 IS
    SELECT * FROM emp
    FOR UPDATE OF salary
    ORDER BY employee_id;

  emp_rec  emp%ROWTYPE;
BEGIN
  OPEN c1;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  LOOP
    FETCH c1 INTO emp_rec;  -- fails on second iteration
    EXIT WHEN c1%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE (
      'emp_rec.employee_id = ' ||
      TO_CHAR(emp_rec.employee_id)
    );

    UPDATE emp
    SET salary = salary * 1.05
    WHERE employee_id = 105;

    COMMIT;  -- releases locks
  END LOOP;
END;
/
```

Result:

```
emp_rec.employee_id = 100
DECLARE
*
ERROR at line 1:
ORA-01002: fetch out of sequence
ORA-06512: at line 11
```

Example 7-42 Simulating CURRENT OF Clause with ROWID Pseudocolumn

```
DROP TABLE emp;
CREATE TABLE emp AS SELECT * FROM employees;

DECLARE
  CURSOR c1 IS
    SELECT last_name, job_id, rowid
    FROM emp;  -- no FOR UPDATE clause

  my_lastname   employees.last_name%TYPE;
  my_jobid      employees.job_id%TYPE;
  my_rowid      UROWID;
BEGIN
  OPEN c1;
  LOOP
    FETCH c1 INTO my_lastname, my_jobid, my_rowid;
    EXIT WHEN c1%NOTFOUND;

    UPDATE emp
    SET salary = salary * 1.02
    WHERE rowid = my_rowid;  -- simulates WHERE CURRENT OF c1

    COMMIT;
  END LOOP;
  CLOSE c1;
END;
/
```

Autonomous Transactions

An **autonomous transaction** is an independent transaction started by another transaction, the main transaction.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Autonomous transactions do SQL operations and commit or roll back, without committing or rolling back the main transaction.

Figure 7-1 shows how control flows from the main transaction (MT) to an autonomous routine (`proc2`) and back again. The autonomous routine commits two autonomous transactions (AT1 and AT2).

Figure 7-1 Transaction Control Flow

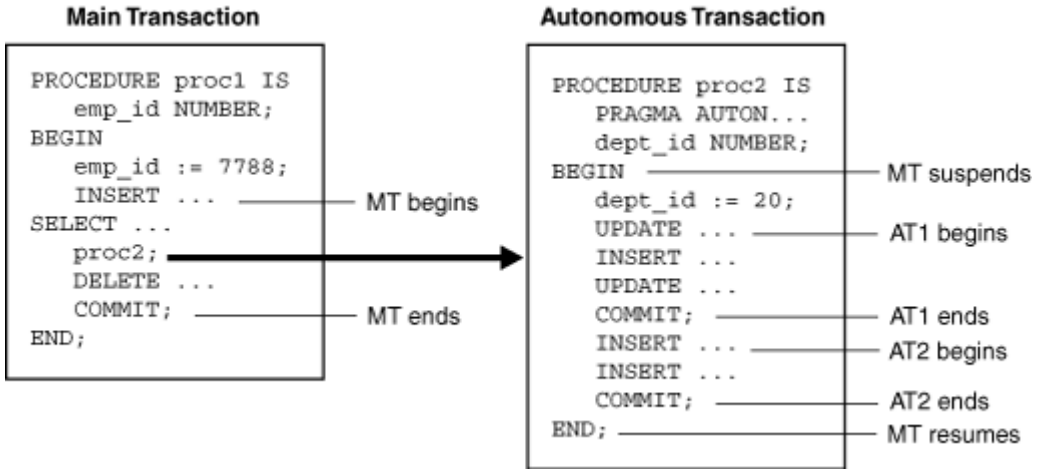

> **Note**
>
> Although an autonomous transaction is started by another transaction, it is not a nested transaction, because:
>
> - It does not share transactional resources (such as locks) with the main transaction.
> - It does not depend on the main transaction.
>
> For example, if the main transaction rolls back, nested transactions roll back, but autonomous transactions do not.
> - Its committed changes are visible to other transactions immediately.
>
> A nested transaction's committed changes are not visible to other transactions until the main transaction commits.
> - Exceptions raised in an autonomous transaction cause a transaction-level rollback, not a statement-level rollback.

Topics

- Advantages of Autonomous Transactions
- Transaction Context
- Transaction Visibility
- Declaring Autonomous Routines
- Controlling Autonomous Transactions

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Autonomous Triggers
- Invoking Autonomous Functions from SQL

> **See Also**
>
> *Oracle Database Development Guide* for more information about autonomous transactions

Advantages of Autonomous Transactions

After starting, an autonomous transaction is fully independent. It shares no locks, resources, or commit-dependencies with the main transaction. You can log events, increment retry counters, and so on, even if the main transaction rolls back.

Autonomous transactions help you build modular, reusable software components. You can encapsulate autonomous transactions in stored subprograms. An invoking application needs not know whether operations done by that stored subprogram succeeded or failed.

Transaction Context

The main transaction shares its context with nested routines, but not with autonomous transactions. When one autonomous routine invokes another (or itself, recursively), the routines share no transaction context. When an autonomous routine invokes a nonautonomous routine, the routines share the same transaction context.

Transaction Visibility

Changes made by an autonomous transaction become visible to other transactions when the autonomous transaction commits. These changes become visible to the main transaction when it resumes, if its isolation level is set to `READ COMMITTED` (the default).

If you set the isolation level of the main transaction to `SERIALIZABLE`, changes made by its autonomous transactions are *not* visible to the main transaction when it resumes:

```
SET TRANSACTION ISOLATION LEVEL SERIALIZABLE;
```

> **Note**
>
> - Transaction properties apply only to the transaction in which they are set.
> - Cursor attributes are not affected by autonomous transactions.

Declaring Autonomous Routines

To declare an autonomous routine, use the `AUTONOMOUS_TRANSACTION` pragma.

For information about this pragma, see "AUTONOMOUS_TRANSACTION Pragma".

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Tip**
>
> For readability, put the `AUTONOMOUS_TRANSACTION` pragma at the top of the declarative section. (The pragma is allowed anywhere in the declarative section.)

You cannot apply the `AUTONOMOUS_TRANSACTION` pragma to an entire package or ADT, but you can apply it to each subprogram in a package or each method of an ADT.

Example 7-43 Declaring Autonomous Function in Package

This example marks a package function as autonomous.

```
CREATE OR REPLACE PACKAGE emp_actions AUTHID DEFINER AS  -- package specification
  FUNCTION raise_salary (emp_id NUMBER, sal_raise NUMBER)
  RETURN NUMBER;
END emp_actions;
/
CREATE OR REPLACE PACKAGE BODY emp_actions AS  -- package body
  -- code for function raise_salary
  FUNCTION raise_salary (emp_id NUMBER, sal_raise NUMBER)
  RETURN NUMBER IS
    PRAGMA AUTONOMOUS_TRANSACTION;
    new_sal NUMBER(8,2);
  BEGIN
    UPDATE employees SET salary =
      salary + sal_raise WHERE employee_id = emp_id;
    COMMIT;
    SELECT salary INTO new_sal FROM employees
      WHERE employee_id = emp_id;
    RETURN new_sal;
  END raise_salary;
END emp_actions;
/
```

Example 7-44 Declaring Autonomous Standalone Procedure

This example marks a standalone subprogram as autonomous.

```
CREATE OR REPLACE PROCEDURE lower_salary
  (emp_id NUMBER, amount NUMBER)
AUTHID DEFINER AS
  PRAGMA AUTONOMOUS_TRANSACTION;
BEGIN
  UPDATE employees
  SET salary =  salary - amount
  WHERE employee_id = emp_id;

  COMMIT;
END lower_salary;
/
```

Example 7-45 Declaring Autonomous PL/SQL Block

This example marks a schema-level PL/SQL block as autonomous. (A nested PL/SQL block cannot be autonomous.)

```
DROP TABLE emp;
CREATE TABLE emp AS SELECT * FROM employees;

DECLARE
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PRAGMA AUTONOMOUS_TRANSACTION;
  emp_id NUMBER(6)   := 200;
  amount NUMBER(6,2) := 200;
BEGIN
  UPDATE employees
  SET salary =  salary - amount
  WHERE employee_id = emp_id;

  COMMIT;
END;
/
```

Controlling Autonomous Transactions

The first SQL statement in an autonomous routine begins a transaction. When one transaction ends, the next SQL statement begins another transaction. All SQL statements run since the last commit or rollback comprise the current transaction. To control autonomous transactions, use these statements, which apply only to the current (active) transaction:

- `COMMIT`
- `ROLLBACK` [`TO` *savepoint_name*]
- `SAVEPOINT` *savepoint_name*
- `SET TRANSACTION`

Topics

- Entering and Exiting Autonomous Routines
- Committing and Rolling Back Autonomous Transactions
- Savepoints
- Avoiding Errors with Autonomous Transactions

Entering and Exiting Autonomous Routines

When you enter the executable section of an autonomous routine, the main transaction suspends. When you exit the routine, the main transaction resumes.

If you try to exit an active autonomous transaction without committing or rolling back, the database raises an exception. If the exception is unhandled, or if the transaction ends because of some other unhandled exception, then the transaction rolls back.

To exit normally, the routine must explicitly commit or roll back all autonomous transactions. If the routine (or any routine invoked by it) has pending transactions, then PL/SQL raises an exception and the pending transactions roll back.

Committing and Rolling Back Autonomous Transactions

`COMMIT` and `ROLLBACK` end the active autonomous transaction but do not exit the autonomous routine. When one transaction ends, the next SQL statement begins another transaction. A single autonomous routine can contain several autonomous transactions, if it issues several `COMMIT` statements.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Savepoints

The scope of a savepoint is the transaction in which it is defined. Savepoints defined in the main transaction are unrelated to savepoints defined in its autonomous transactions. In fact, the main transaction and an autonomous transaction can use the same savepoint names.

You can roll back only to savepoints marked in the current transaction. In an autonomous transaction, you cannot roll back to a savepoint marked in the main transaction. To do so, you must resume the main transaction by exiting the autonomous routine.

When in the main transaction, rolling back to a savepoint marked before you started an autonomous transaction does *not* roll back the autonomous transaction. Remember, autonomous transactions are fully independent of the main transaction.

Avoiding Errors with Autonomous Transactions

To avoid some common errors, remember:

- If an autonomous transaction tries to access a resource held by the main transaction, a deadlock can occur. The database raises an exception in the autonomous transaction, which rolls back if the exception is unhandled.
- The database initialization parameter `TRANSACTIONS` specifies the maximum number of concurrent transactions. That number might be exceeded because an autonomous transaction runs concurrently with the main transaction.
- If you try to exit an active autonomous transaction without committing or rolling back, the database raises an exception. If the exception is unhandled, the transaction rolls back.
- You cannot run a `PIPE ROW` statement in an autonomous routine while an autonomous transaction is open. You must close the autonomous transaction before running the `PIPE ROW` statement. This is normally accomplished by committing or rolling back the autonomous transaction before running the `PIPE ROW` statement.

Autonomous Triggers

A trigger must be autonomous to run TCL or DDL statements.

To run DDL statements, the trigger must use native dynamic SQL.

> **See Also**
>
> - PL/SQL Triggers, for general information about triggers
> - "Description of Static SQL" for general information about TCL statements
> - *Oracle Database SQL Language Reference* for information about DDL statements
> - "Native Dynamic SQL" for information about native dynamic SQL

One use of triggers is to log events transparently—for example, to log all inserts into a table, even those that roll back.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 7-46 Autonomous Trigger Logs INSERT Statements

In this example, whenever a row is inserted into the EMPLOYEES table, a trigger inserts the same row into a log table. Because the trigger is autonomous, it can commit changes to the log table regardless of whether they are committed to the main table.

```
DROP TABLE emp;
CREATE TABLE emp AS SELECT * FROM employees;

-- Log table:

DROP TABLE log;
CREATE TABLE log (
  log_id   NUMBER(6),
  up_date  DATE,
  new_sal  NUMBER(8,2),
  old_sal  NUMBER(8,2)
);

-- Autonomous trigger on emp table:

CREATE OR REPLACE TRIGGER log_sal
  BEFORE UPDATE OF salary ON emp FOR EACH ROW
DECLARE
  PRAGMA AUTONOMOUS_TRANSACTION;
BEGIN
  INSERT INTO log (
    log_id,
    up_date,
    new_sal,
    old_sal
  )
  VALUES (
    :old.employee_id,
    SYSDATE,
    :new.salary,
    :old.salary
  );
  COMMIT;
END;
/
UPDATE emp
SET salary = salary * 1.05
WHERE employee_id = 115;

COMMIT;

UPDATE emp
SET salary = salary * 1.05
WHERE employee_id = 116;

ROLLBACK;

-- Show that both committed and rolled-back updates
-- add rows to log table

SELECT * FROM log
WHERE log_id = 115 OR log_id = 116;
```

Result:

```
    LOG_ID UP_DATE      NEW_SAL    OLD_SAL
---------- --------- ---------- ----------
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
       115 02-OCT-12    3255          3100
       116 02-OCT-12    3045          2900

2 rows selected.
```

Example 7-47 Autonomous Trigger Uses Native Dynamic SQL for DDL

In this example, an autonomous trigger uses native dynamic SQL (an `EXECUTE IMMEDIATE` statement) to drop a temporary table after a row is inserted into the table `log`.

```
DROP TABLE temp;
CREATE TABLE temp (
  temp_id NUMBER(6),
  up_date DATE
);

CREATE OR REPLACE TRIGGER drop_temp_table
  AFTER INSERT ON log
DECLARE
  PRAGMA AUTONOMOUS_TRANSACTION;
BEGIN
  EXECUTE IMMEDIATE 'DROP TABLE temp';
  COMMIT;
END;
/
-- Show how trigger works
SELECT * FROM temp;
```

Result:

```
no rows selected

INSERT INTO log (log_id, up_date, new_sal, old_sal)
VALUES (999, SYSDATE, 5000, 4500);

1 row created.

SELECT * FROM temp;
```

Result:

```
SELECT * FROM temp
              *
ERROR at line 1:
ORA-00942: table or view does not exist
```

Invoking Autonomous Functions from SQL

A function invoked from SQL statements must obey rules meant to control side effects.

By definition, an autonomous routine never reads or writes database state (that is, it neither queries nor modifies any database table).

> **See Also**
>
> "Subprogram Side Effects" for more information

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 7-48 Invoking Autonomous Function

The package function `log_msg` is autonomous. Therefore, when the query invokes the function, the function inserts a message into database table `debug_output` without violating the rule against writing database state (modifying database tables).

```
DROP TABLE debug_output;
CREATE TABLE debug_output (message VARCHAR2(200));

CREATE OR REPLACE PACKAGE debugging AUTHID DEFINER AS
  FUNCTION log_msg (msg VARCHAR2) RETURN VARCHAR2;
END debugging;
/
CREATE OR REPLACE PACKAGE BODY debugging AS
  FUNCTION log_msg (msg VARCHAR2) RETURN VARCHAR2 IS
    PRAGMA AUTONOMOUS_TRANSACTION;
  BEGIN
    INSERT INTO debug_output (message) VALUES (msg);
    COMMIT;
    RETURN msg;
  END;
END debugging;
/
-- Invoke package function from query
DECLARE
  my_emp_id    NUMBER(6);
  my_last_name VARCHAR2(25);
  my_count     NUMBER;
BEGIN
  my_emp_id := 120;

  SELECT debugging.log_msg(last_name)
  INTO my_last_name
  FROM employees
  WHERE employee_id = my_emp_id;

  /* Even if you roll back in this scope,
     the insert into 'debug_output' remains committed,
     because it is part of an autonomous transaction. */

  ROLLBACK;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

8

PL/SQL Dynamic SQL

Dynamic SQL is a programming methodology for generating and running SQL statements at run time.

It is useful when writing general-purpose and flexible programs like ad hoc query systems, when writing programs that must run database definition language (DDL) statements, or when you do not know at compile time the full text of a SQL statement or the number or data types of its input and output variables.

PL/SQL provides two ways to write dynamic SQL:

- Native dynamic SQL, a PL/SQL language (that is, native) feature for building and running dynamic SQL statements
- `DBMS_SQL` package, an API for building, running, and describing dynamic SQL statements

Native dynamic SQL code is easier to read and write than equivalent code that uses the `DBMS_SQL` package, and runs noticeably faster (especially when it can be optimized by the compiler). However, to write native dynamic SQL code, you must know at compile time the number and data types of the input and output variables of the dynamic SQL statement. If you do not know this information at compile time, you must use the `DBMS_SQL` package. You must also use the `DBMS_SQL` package if you want a stored subprogram to return a query result implicitly (not through an `OUT REF CURSOR` parameter).

When you need both the `DBMS_SQL` package and native dynamic SQL, you can switch between them, using the "DBMS_SQL.TO_REFCURSOR Function" and "DBMS_SQL.TO_CURSOR_NUMBER Function".

Topics

- When You Need Dynamic SQL
- Native Dynamic SQL
- DBMS_SQL Package
- SQL Injection

When You Need Dynamic SQL

In PL/SQL, you need dynamic SQL to run:

- SQL whose text is unknown at compile time

  For example, a `SELECT` statement that includes an identifier that is unknown at compile time (such as a table name) or a `WHERE` clause in which the number of subclauses is unknown at compile time.

- SQL that is not supported as static SQL

  That is, any SQL construct not included in "Description of Static SQL".

If you do not need dynamic SQL, use static SQL, which has these advantages:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Successful compilation verifies that static SQL statements reference valid database objects and that the necessary privileges are in place to access those objects.
- Successful compilation creates schema object dependencies.

  For information about schema object dependencies, see *Oracle Database Development Guide*.

For information about using static SQL statements with PL/SQL, see PL/SQL Static SQL.

Native Dynamic SQL

Native dynamic SQL processes most dynamic SQL statements with the `EXECUTE IMMEDIATE` statement.

If the dynamic SQL statement is a `SELECT` statement that returns multiple rows, native dynamic SQL gives you these choices:

- Use the `EXECUTE IMMEDIATE` statement with the `BULK COLLECT INTO` clause.
- Use the `OPEN FOR`, `FETCH`, and `CLOSE` statements.

The SQL cursor attributes work the same way after native dynamic SQL `INSERT`, `UPDATE`, `DELETE`, `MERGE`, and single-row `SELECT` statements as they do for their static SQL counterparts. For more information about SQL cursor attributes, see "Cursors Overview".

Topics

- EXECUTE IMMEDIATE Statement
- OPEN FOR, FETCH, and CLOSE Statements
- Repeated Placeholder Names in Dynamic SQL Statements

EXECUTE IMMEDIATE Statement

The `EXECUTE IMMEDIATE` statement is the means by which native dynamic SQL processes most dynamic SQL statements.

If the dynamic SQL statement is **self-contained** (that is, if it has no placeholders for bind variables and the only result that it can possibly return is an error), then the `EXECUTE IMMEDIATE` statement needs no clauses.

If the dynamic SQL statement includes placeholders for bind variables, each placeholder must have a corresponding bind variable in the appropriate clause of the `EXECUTE IMMEDIATE` statement, as follows:

- If the dynamic SQL statement is a `SELECT` statement that can return at most one row, put out-bind variables (defines) in the `INTO` clause and in-bind variables in the `USING` clause.
- If the dynamic SQL statement is a `SELECT` statement that can return multiple rows, put out-bind variables (defines) in the `BULK COLLECT INTO` clause and in-bind variables in the `USING` clause.
- If the dynamic SQL statement is a DML statement without a `RETURNING INTO` clause, other than `SELECT`, put all bind variables in the `USING` clause.
- If the dynamic SQL statement is a DML statement with a `RETURNING INTO` clause, put in-bind variables in the `USING` clause and out-bind variables in the `RETURNING INTO` clause.
- If the dynamic SQL statement is an anonymous PL/SQL block or a `CALL` statement, put all bind variables in the `USING` clause.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If the dynamic SQL statement invokes a subprogram, ensure that:

- The subprogram is either created at schema level or declared and defined in a package specification.
- Every bind variable that corresponds to a placeholder for a subprogram parameter has the same parameter mode as that subprogram parameter and a data type that is compatible with that of the subprogram parameter.
- No bind variable is the reserved word `NULL`.

  To work around this restriction, use an uninitialized variable where you want to use `NULL`, as in Example 8-7.
- No bind variable has a data type that SQL does not support (such as associative array indexed by string).

  If the data type is a collection or record type, then it must be declared in a package specification.

Note

Bind variables can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.

In Example 8-4, Example 8-5, and Example 8-6, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of a PL/SQL collection type. Collection types are not SQL data types. In each example, the collection type is declared in a package specification, and the subprogram is declared in the package specification and defined in the package body.

See Also

- "CREATE FUNCTION Statement" for information about creating functions at schema level
- "CREATE PROCEDURE Statement" for information about creating procedures at schema level
- "PL/SQL Packages" for information about packages
- "CREATE PACKAGE Statement" for information about declaring subprograms in packages
- "CREATE PACKAGE BODY Statement" for information about declaring and defining subprograms in packages
- "CREATE PACKAGE Statement" for more information about declaring types in a package specification
- "EXECUTE IMMEDIATE Statement"for syntax details of the `EXECUTE IMMEDIATE` statement
- "PL/SQL Collections and Records" for information about collection types

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 8-1 Invoking Subprogram from Dynamic PL/SQL Block

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram created at schema level.

```
-- Subprogram that dynamic PL/SQL block invokes:
CREATE OR REPLACE PROCEDURE create_dept (
  deptid IN OUT NUMBER,
  dname  IN     VARCHAR2,
  mgrid  IN     NUMBER,
  locid  IN     NUMBER
) AUTHID DEFINER AS
BEGIN
  deptid := departments_seq.NEXTVAL;

  INSERT INTO departments (
    department_id,
    department_name,
    manager_id,
    location_id
  )
  VALUES (deptid, dname, mgrid, locid);
END;
/
DECLARE
  plsql_block VARCHAR2(500);
  new_deptid  NUMBER(4);
  new_dname   VARCHAR2(30) := 'Advertising';
  new_mgrid   NUMBER(6)    := 200;
  new_locid   NUMBER(4)    := 1700;
BEGIN
 -- Dynamic PL/SQL block invokes subprogram:
  plsql_block := 'BEGIN create_dept(:a, :b, :c, :d); END;';

 /* Specify bind variables in USING clause.
    Specify mode for first parameter.
    Modes of other parameters are correct by default. */

  EXECUTE IMMEDIATE plsql_block
    USING IN OUT new_deptid, new_dname, new_mgrid, new_locid;
END;
/
```

Example 8-2 Dynamically Invoking Subprogram with BOOLEAN Formal Parameter

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of the PL/SQL data type `BOOLEAN`.

```
CREATE OR REPLACE PROCEDURE p (x BOOLEAN) AUTHID DEFINER AS
BEGIN
  IF x THEN
    DBMS_OUTPUT.PUT_LINE('x is true');
  END IF;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  dyn_stmt VARCHAR2(200);
  b        BOOLEAN := TRUE;
BEGIN
  dyn_stmt := 'BEGIN p(:x); END;';
  EXECUTE IMMEDIATE dyn_stmt USING b;
END;
/
```

Result:

```
x is true
```

Example 8-3 Dynamically Invoking Subprogram with RECORD Formal Parameter

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of the PL/SQL (but not SQL) data type `RECORD`. The record type is declared in a package specification, and the subprogram is declared in the package specification and defined in the package body.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS

  TYPE rec IS RECORD (n1 NUMBER, n2 NUMBER);

  PROCEDURE p (x OUT rec, y NUMBER, z NUMBER);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS

  PROCEDURE p (x OUT rec, y NUMBER, z NUMBER) AS
  BEGIN
    x.n1 := y;
    x.n2 := z;
  END p;
END pkg;
/
DECLARE
  r       pkg.rec;
  dyn_str VARCHAR2(3000);
BEGIN
  dyn_str := 'BEGIN pkg.p(:x, 6, 8); END;';

  EXECUTE IMMEDIATE dyn_str USING OUT r;

  DBMS_OUTPUT.PUT_LINE('r.n1 = ' || r.n1);
  DBMS_OUTPUT.PUT_LINE('r.n2 = ' || r.n2);
END;
/
```

Result:

```
r.n1 = 6
r.n2 = 8
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 8-4 Dynamically Invoking Subprogram with Assoc. Array Formal Parameter

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of the PL/SQL collection type associative array indexed by `PLS_INTEGER`.

> **Note**
>
> An associative array type used in this context must be indexed by `PLS_INTEGER`.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS

  TYPE number_names IS TABLE OF VARCHAR2(5)
    INDEX BY PLS_INTEGER;

  PROCEDURE print_number_names (x number_names);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS
  PROCEDURE print_number_names (x number_names) IS
  BEGIN
    FOR i IN x.FIRST .. x.LAST LOOP
      DBMS_OUTPUT.PUT_LINE(x(i));
    END LOOP;
  END;
END pkg;
/
DECLARE
  digit_names  pkg.number_names;
  dyn_stmt     VARCHAR2(3000);
BEGIN
  digit_names(0) := 'zero';
  digit_names(1) := 'one';
  digit_names(2) := 'two';
  digit_names(3) := 'three';
  digit_names(4) := 'four';
  digit_names(5) := 'five';
  digit_names(6) := 'six';
  digit_names(7) := 'seven';
  digit_names(8) := 'eight';
  digit_names(9) := 'nine';

  dyn_stmt := 'BEGIN pkg.print_number_names(:x); END;';
  EXECUTE IMMEDIATE dyn_stmt USING digit_names;
END;
/
```

Result:

```
zero
one
two
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
...
nine
```

Example 8-5 Dynamically Invoking Subprogram with Nested Table Formal Parameter

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of the PL/SQL collection type nested table.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS

  TYPE names IS TABLE OF VARCHAR2(10);

  PROCEDURE print_names (x names);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS
  PROCEDURE print_names (x names) IS
  BEGIN
    FOR i IN x.FIRST .. x.LAST LOOP
      DBMS_OUTPUT.PUT_LINE(x(i));
    END LOOP;
  END;
END pkg;
/
DECLARE
  fruits   pkg.names;
  dyn_stmt VARCHAR2(3000);
BEGIN
  fruits := pkg.names('apple', 'banana', 'cherry');

  dyn_stmt := 'BEGIN pkg.print_names(:x); END;';
  EXECUTE IMMEDIATE dyn_stmt USING fruits;
END;
/
```

Result:

```
apple
banana
cherry
```

Example 8-6 Dynamically Invoking Subprogram with Varray Formal Parameter

In this example, the dynamic PL/SQL block is an anonymous PL/SQL block that invokes a subprogram that has a formal parameter of the PL/SQL collection type varray.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS

  TYPE foursome IS VARRAY(4) OF VARCHAR2(5);

  PROCEDURE print_foursome (x foursome);
END pkg;
/
CREATE OR REPLACE PACKAGE BODY pkg AS
  PROCEDURE print_foursome (x foursome) IS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  BEGIN
    IF x.COUNT = 0 THEN
      DBMS_OUTPUT.PUT_LINE('Empty');
    ELSE
      FOR i IN x.FIRST .. x.LAST LOOP
        DBMS_OUTPUT.PUT_LINE(x(i));
      END LOOP;
    END IF;
  END;
END pkg;
/
DECLARE
  directions pkg.foursome;
  dyn_stmt VARCHAR2(3000);
BEGIN
  directions := pkg.foursome('north', 'south', 'east', 'west');

  dyn_stmt := 'BEGIN pkg.print_foursome(:x); END;';
  EXECUTE IMMEDIATE dyn_stmt USING directions;
END;
/
```

Result:

```
north
south
east
west
```

Example 8-7 Uninitialized Variable Represents NULL in USING Clause

This example uses an uninitialized variable to represent the reserved word `NULL` in the `USING` clause.

```
CREATE TABLE employees_temp AS SELECT * FROM EMPLOYEES;

DECLARE
  a_null  CHAR(1);  -- Set to NULL automatically at run time
BEGIN
  EXECUTE IMMEDIATE 'UPDATE employees_temp SET commission_pct = :x'
    USING a_null;
END;
/
```

OPEN FOR, FETCH, and CLOSE Statements

If the dynamic SQL statement represents a `SELECT` statement that returns multiple rows, you can process it with native dynamic SQL as follows:

1. Use an `OPEN FOR` statement to associate a cursor variable with the dynamic SQL statement. In the `USING` clause of the `OPEN FOR` statement, specify a bind variable for each placeholder in the dynamic SQL statement.

   The `USING` clause cannot contain the literal `NULL`. To work around this restriction, use an uninitialized variable where you want to use `NULL`, as in Example 8-7.

Copyright © 1996, 2025, Oracle and/or its affiliates.

2. Use the `FETCH` statement to retrieve result set rows one at a time, several at a time, or all at once.
3. Use the `CLOSE` statement to close the cursor variable.

The dynamic SQL statement can query a collection if the collection meets the criteria in "Querying a Collection".

> **See Also**
>
> - "OPEN FOR Statement" for syntax details
> - "FETCH Statement" for syntax details
> - "CLOSE Statement" for syntax details

Example 8-8 Native Dynamic SQL with OPEN FOR, FETCH, and CLOSE Statements

This example lists all employees who are managers, retrieving result set rows one at a time.

```
DECLARE
  TYPE EmpCurTyp  IS REF CURSOR;
  v_emp_cursor    EmpCurTyp;
  emp_record      employees%ROWTYPE;
  v_stmt_str      VARCHAR2(200);
  v_e_job         employees.job_id%TYPE;
BEGIN
  -- Dynamic SQL statement with placeholder:
  v_stmt_str := 'SELECT * FROM employees WHERE job_id = :j';

  -- Open cursor & specify bind variable in USING clause:
  OPEN v_emp_cursor FOR v_stmt_str USING 'MANAGER';

  -- Fetch rows from result set one at a time:
  LOOP
    FETCH v_emp_cursor INTO emp_record;
    EXIT WHEN v_emp_cursor%NOTFOUND;
  END LOOP;

  -- Close cursor:
  CLOSE v_emp_cursor;
END;
/
```

Example 8-9 Querying a Collection with Native Dynamic SQL

This example is like Example 7-30 except that the collection variable `v1` is a bind variable.

```
CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER AS
  TYPE rec IS RECORD(f1 NUMBER, f2 VARCHAR2(30));
  TYPE mytab IS TABLE OF rec INDEX BY pls_integer;
END;
/

DECLARE
  v1 pkg.mytab;  -- collection of records
  v2 pkg.rec;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  c1 SYS_REFCURSOR;
BEGIN
  OPEN c1 FOR 'SELECT * FROM TABLE(:1)' USING v1;
  FETCH c1 INTO v2;
  CLOSE c1;
  DBMS_OUTPUT.PUT_LINE('Values in record are ' || v2.f1 || ' and ' || v2.f2);
END;
/
```

Repeated Placeholder Names in Dynamic SQL Statements

If you repeat placeholder names in dynamic SQL statements, be aware that the way placeholders are associated with bind variables depends on the kind of dynamic SQL statement.

Topics

- Dynamic SQL Statement is Not Anonymous Block or CALL Statement
- Dynamic SQL Statement is Anonymous Block or CALL Statement

Dynamic SQL Statement is Not Anonymous Block or CALL Statement

If the dynamic SQL statement does not represent an anonymous PL/SQL block or a `CALL` statement, repetition of placeholder names is insignificant.

Placeholders are associated with bind variables in the `USING` clause by position, not by name.

For example, in this dynamic SQL statement, the repetition of the name `:x` is insignificant:

```
sql_stmt := 'INSERT INTO payroll VALUES (:x, :x, :y, :x)';
```

In the corresponding `USING` clause, you must supply four bind variables. They can be different; for example:

```
EXECUTE IMMEDIATE sql_stmt USING a, b, c, d;
```

The preceding `EXECUTE IMMEDIATE` statement runs this SQL statement:

```
INSERT INTO payroll VALUES (a, b, c, d)
```

To associate the same bind variable with each occurrence of `:x`, you must repeat that bind variable; for example:

```
EXECUTE IMMEDIATE sql_stmt USING a, a, b, a;
```

The preceding `EXECUTE IMMEDIATE` statement runs this SQL statement:

```
INSERT INTO payroll VALUES (a, a, b, a)
```

Dynamic SQL Statement is Anonymous Block or CALL Statement

If the dynamic SQL statement represents an anonymous PL/SQL block or a `CALL` statement, repetition of placeholder names is significant.

Each unique placeholder name must have a corresponding bind variable in the `USING` clause. If you repeat a placeholder name, you need not repeat its corresponding bind variable. All references to that placeholder name correspond to one bind variable in the `USING` clause.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 8-10 Repeated Placeholder Names in Dynamic PL/SQL Block

In this example, all references to the first unique placeholder name, :x, are associated with the first bind variable in the USING clause, a, and the second unique placeholder name, :y, is associated with the second bind variable in the USING clause, b.

```
CREATE PROCEDURE calc_stats (
  w NUMBER,
  x NUMBER,
  y NUMBER,
  z NUMBER )
IS
BEGIN
  DBMS_OUTPUT.PUT_LINE(w + x + y + z);
END;
/
DECLARE
  a NUMBER := 4;
  b NUMBER := 7;
  plsql_block VARCHAR2(100);
BEGIN
  plsql_block := 'BEGIN calc_stats(:x, :x, :y, :x); END;';
  EXECUTE IMMEDIATE plsql_block USING a, b;  -- calc_stats(a, a, b, a)
END;
/
```

Result:

```
19
```

DBMS_SQL Package

The DBMS_SQL package defines an entity called a SQL cursor number. Because the SQL cursor number is a PL/SQL integer, you can pass it across call boundaries and store it.

You must use the DBMS_SQL package to run a dynamic SQL statement if any of the following are true:

- You do not know the SELECT list until run time.
- You do not know until run time what placeholders in a SELECT or DML statement must be bound.
- You want a stored subprogram to return a query result implicitly (not through an OUT REF CURSOR parameter), which requires the DBMS_SQL.RETURN_RESULT procedure.

In these situations, you must use native dynamic SQL instead of the DBMS_SQL package:

- The dynamic SQL statement retrieves rows into records.
- You want to use the SQL cursor attribute %FOUND, %ISOPEN, %NOTFOUND, or %ROWCOUNT after issuing a dynamic SQL statement that is an INSERT, UPDATE, DELETE, MERGE, or single-row SELECT statement.

When you need both the DBMS_SQL package and native dynamic SQL, you can switch between them, using the functions DBMS_SQL.TO_REFCURSOR and DBMS_SQL.TO_CURSOR_NUMBER.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- DBMS_SQL.RETURN_RESULT Procedure
- DBMS_SQL.GET_NEXT_RESULT Procedure
- DBMS_SQL.TO_REFCURSOR Function
- DBMS_SQL.TO_CURSOR_NUMBER Function

> **Note**
>
> You can invoke DBMS_SQL subprograms remotely.

> **See Also**
>
> - "Native Dynamic SQL"for information about native dynamic SQL
> - *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_SQL package, including instructions for running a dynamic SQL statement that has an unknown number of input or output variables ("Method 4")

DBMS_SQL.RETURN_RESULT Procedure

The DBMS_SQL.RETURN_RESULT procedure lets a stored subprogram return a query result implicitly to either the client program (which invokes the subprogram indirectly) or the immediate caller of the subprogram. After DBMS_SQL.RETURN_RESULT returns the result, only the recipient can access it.

The DBMS_SQL.RETURN_RESULT has two overloads:

```
PROCEDURE RETURN_RESULT (rc IN OUT SYS_REFCURSOR,
                         to_client IN BOOLEAN DEFAULT TRUE);

PROCEDURE RETURN_RESULT (rc IN OUT INTEGER,
                         to_client IN BOOLEAN DEFAULT TRUE);
```

The rc parameter is either an open cursor variable (SYS_REFCURSOR) or the cursor number (INTEGER) of an open cursor. To open a cursor and get its cursor number, invoke the DBMS_SQL.OPEN_CURSOR function, described in *Oracle Database PL/SQL Packages and Types Reference*.

When the to_client parameter is TRUE (the default), the DBMS_SQL.RETURN_RESULT procedure returns the query result to the client program (which invokes the subprogram indirectly); when this parameter is FALSE, the procedure returns the query result to the subprogram's immediate caller.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database PL/SQL Packages and Types Reference* for more information about `DBMS_SQL.RETURN_RESULT`
- *Oracle Call Interface Programmer's Guide* for information about C and .NET support for implicit query results
- *SQL*Plus User's Guide and Reference* for information about SQL*Plus support for implicit query results

Example 8-11 DBMS_SQL.RETURN_RESULT Procedure

In this example, the procedure `p` invokes `DBMS_SQL.RETURN_RESULT` without the optional `to_client` parameter (which is `TRUE` by default). Therefore, `DBMS_SQL.RETURN_RESULT` returns the query result to the subprogram client (the anonymous block that invokes `p`). After `p` returns a result to the anonymous block, only the anonymous block can access that result.

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER AS
  c1 SYS_REFCURSOR;
  c2 SYS_REFCURSOR;
BEGIN
  OPEN c1 FOR
    SELECT first_name, last_name
    FROM employees
    WHERE employee_id = 176;

  DBMS_SQL.RETURN_RESULT (c1);
  -- Now p cannot access the result.

  OPEN c2 FOR
    SELECT city, state_province
    FROM locations
    WHERE country_id = 'AU';

  DBMS_SQL.RETURN_RESULT (c2);
  -- Now p cannot access the result.
END;
/
BEGIN
  p;
END;
/
```

Result:

```
ResultSet #1

FIRST_NAME           LAST_NAME
-------------------- -------------------------
Jonathon             Taylor

ResultSet #2

CITY                         STATE_PROVINCE
---------------------------- -------------------------
Sydney                       New South Wales
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

DBMS_SQL.GET_NEXT_RESULT Procedure

The DBMS_SQL.GET_NEXT_RESULT procedure gets the next result that the DBMS_SQL.RETURN_RESULT procedure returned to the recipient. The two procedures return results in the same order.

The DBMS_SQL.GET_NEXT_RESULT has two overloads:

```
PROCEDURE GET_NEXT_RESULT (c IN INTEGER, rc OUT SYS_REFCURSOR);

PROCEDURE GET_NEXT_RESULT (c IN INTEGER, rc OUT INTEGER);
```

The c parameter is the cursor number of an open cursor that directly or indirectly invokes a subprogram that uses the DBMS_SQL.RETURN_RESULT procedure to return a query result implicitly.

To open a cursor and get its cursor number, invoke the DBMS_SQL.OPEN_CURSOR function. DBMS_SQL.OPEN_CURSOR has an optional parameter, treat_as_client_for_results. When this parameter is FALSE (the default), the caller that opens this cursor (to invoke a subprogram) is not treated as the client that receives query results for the client from the subprogram that uses DBMS_SQL.RETURN_RESULT—those query results are returned to the client in a upper tier instead. When this parameter is TRUE, the caller is treated as the client. For more information about the DBMS_SQL.OPEN_CURSOR function, see *Oracle Database PL/SQL Packages and Types Reference*.

The rc parameter is either a cursor variable (SYS_REFCURSOR) or the cursor number (INTEGER) of an open cursor.

In Example 8-12, the procedure get_employee_info uses DBMS_SQL.RETURN_RESULT to return two query results to a client program and is invoked dynamically by the anonymous block <<main>>. Because <<main>> needs to receive the two query results that get_employee_info returns, <<main>> opens a cursor to invoke get_employee_info using DBMS_SQL.OPEN_CURSOR with the parameter treat_as_client_for_results set to TRUE. Therefore, DBMS_SQL.GET_NEXT_RESULT returns its results to <<main>>, which uses the cursor rc to fetch them.

Example 8-12 DBMS_SQL.GET_NEXT_RESULT Procedure

```
CREATE OR REPLACE PROCEDURE get_employee_info (id IN VARCHAR2) AUTHID DEFINER AS
  rc  SYS_REFCURSOR;
BEGIN
  -- Return employee info

  OPEN rc FOR SELECT first_name, last_name, email, phone_number
              FROM employees
              WHERE employee_id = id;
  DBMS_SQL.RETURN_RESULT(rc);

  -- Return employee job history

  OPEN RC FOR SELECT job_title, start_date, end_date
              FROM job_history jh, jobs j
              WHERE jh.employee_id = id AND
                    jh.job_id = j.job_id
              ORDER BY start_date DESC;
  DBMS_SQL.RETURN_RESULT(rc);
END;
/
<<main>>
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  c            INTEGER;
  rc           SYS_REFCURSOR;
  n            NUMBER;

  first_name   VARCHAR2(20);
  last_name    VARCHAR2(25);
  email        VARCHAR2(25);
  phone_number VARCHAR2(20);

  job_title    VARCHAR2(35);
  start_date   DATE;
  end_date     DATE;

BEGIN

  c := DBMS_SQL.OPEN_CURSOR(true);
  DBMS_SQL.PARSE(c, 'BEGIN get_employee_info(:id); END;', DBMS_SQL.NATIVE);
  DBMS_SQL.BIND_VARIABLE(c, ':id', 176);
  n := DBMS_SQL.EXECUTE(c);

  -- Get employee info

  dbms_sql.get_next_result(c, rc);
  FETCH rc INTO first_name, last_name, email, phone_number;

  DBMS_OUTPUT.PUT_LINE('Employee: '||first_name || ' ' || last_name);
  DBMS_OUTPUT.PUT_LINE('Email: ' ||email);
  DBMS_OUTPUT.PUT_LINE('Phone: ' ||phone_number);

  -- Get employee job history

  DBMS_OUTPUT.PUT_LINE('Titles:');
  DBMS_SQL.GET_NEXT_RESULT(c, rc);
  LOOP
    FETCH rc INTO job_title, start_date, end_date;
    EXIT WHEN rc%NOTFOUND;
    DBMS_OUTPUT.PUT_LINE
      ('- '||job_title||' ('||start_date||' - ' ||end_date||')');
  END LOOP;

  DBMS_SQL.CLOSE_CURSOR(c);
END main;
/
```

Result:

```
Employee: Jonathon Taylor
Email: JTAYLOR
Phone: 44.1632.960031
Titles:
- Sales Manager (01-JAN-17 - 31-DEC-17)
- Sales Representative (24-MAR-16 - 31-DEC-16)

PL/SQL procedure successfully completed.
```

DBMS_SQL.TO_REFCURSOR Function

The `DBMS_SQL.TO_REFCURSOR` function converts a SQL cursor number to a weak cursor variable, which you can use in native dynamic SQL statements.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Before passing a SQL cursor number to the DBMS_SQL.TO_REFCURSOR function, you must OPEN, PARSE, and EXECUTE it (otherwise an error occurs).

After you convert a SQL cursor number to a REF CURSOR variable, DBMS_SQL operations can access it only as the REF CURSOR variable, not as the SQL cursor number. For example, using the DBMS_SQL.IS_OPEN function to see if a converted SQL cursor number is still open causes an error.

Example 8-13 uses the DBMS_SQL.TO_REFCURSOR function to switch from the DBMS_SQL package to native dynamic SQL.

Example 8-13 Switching from DBMS_SQL Package to Native Dynamic SQL

```
CREATE OR REPLACE TYPE vc_array IS TABLE OF VARCHAR2(200);
/
CREATE OR REPLACE TYPE numlist IS TABLE OF NUMBER;
/
CREATE OR REPLACE PROCEDURE do_query_1 (
  placeholder vc_array,
  bindvars vc_array,
  sql_stmt VARCHAR2
) AUTHID DEFINER
IS
  TYPE curtype IS REF CURSOR;
  src_cur     curtype;
  curid       NUMBER;
  bindnames   vc_array;
  empnos      numlist;
  depts       numlist;
  ret         NUMBER;
  isopen      BOOLEAN;
BEGIN
  -- Open SQL cursor number:
  curid := DBMS_SQL.OPEN_CURSOR;

  -- Parse SQL cursor number:
  DBMS_SQL.PARSE(curid, sql_stmt, DBMS_SQL.NATIVE);

  bindnames := placeholder;

  -- Bind variables:
  FOR i IN 1 .. bindnames.COUNT LOOP
    DBMS_SQL.BIND_VARIABLE(curid, bindnames(i), bindvars(i));
  END LOOP;

  -- Run SQL cursor number:
  ret := DBMS_SQL.EXECUTE(curid);

  -- Switch from DBMS_SQL to native dynamic SQL:
  src_cur := DBMS_SQL.TO_REFCURSOR(curid);
  FETCH src_cur BULK COLLECT INTO empnos, depts;

  -- This would cause an error because curid was converted to a REF CURSOR:
  -- isopen := DBMS_SQL.IS_OPEN(curid);

  CLOSE src_cur;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

DBMS_SQL.TO_CURSOR_NUMBER Function

The DBMS_SQL.TO_CURSOR_NUMBER function converts a REF CURSOR variable (either strong or weak) to a SQL cursor number, which you can pass to DBMS_SQL subprograms.

Before passing a REF CURSOR variable to the DBMS_SQL.TO_CURSOR_NUMBER function, you must OPEN it.

After you convert a REF CURSOR variable to a SQL cursor number, native dynamic SQL operations cannot access it.

Example 8-14 uses the DBMS_SQL.TO_CURSOR_NUMBER function to switch from native dynamic SQL to the DBMS_SQL package.

Example 8-14 Switching from Native Dynamic SQL to DBMS_SQL Package

```
CREATE OR REPLACE PROCEDURE do_query_2 (
  sql_stmt VARCHAR2
) AUTHID DEFINER
IS
  TYPE curtype IS REF CURSOR;
  src_cur   curtype;
  curid     NUMBER;
  desctab   DBMS_SQL.DESC_TAB;
  colcnt    NUMBER;
  namevar   VARCHAR2(50);
  numvar    NUMBER;
  datevar   DATE;
  empno     NUMBER := 100;
BEGIN
  -- sql_stmt := SELECT ... FROM employees WHERE employee_id = :b1';

  -- Open REF CURSOR variable:
  OPEN src_cur FOR sql_stmt USING empno;

  -- Switch from native dynamic SQL to DBMS_SQL package:
  curid := DBMS_SQL.TO_CURSOR_NUMBER(src_cur);
  DBMS_SQL.DESCRIBE_COLUMNS(curid, colcnt, desctab);

  -- Define columns:
  FOR i IN 1 .. colcnt LOOP
    IF desctab(i).col_type = 2 THEN
      DBMS_SQL.DEFINE_COLUMN(curid, i, numvar);
    ELSIF desctab(i).col_type = 12 THEN
      DBMS_SQL.DEFINE_COLUMN(curid, i, datevar);
      -- statements
    ELSE
      DBMS_SQL.DEFINE_COLUMN(curid, i, namevar, 50);
    END IF;
  END LOOP;

  -- Fetch rows with DBMS_SQL package:
  WHILE DBMS_SQL.FETCH_ROWS(curid) > 0 LOOP
    FOR i IN 1 .. colcnt LOOP
      IF (desctab(i).col_type = 1) THEN
        DBMS_SQL.COLUMN_VALUE(curid, i, namevar);
      ELSIF (desctab(i).col_type = 2) THEN
        DBMS_SQL.COLUMN_VALUE(curid, i, numvar);
      ELSIF (desctab(i).col_type = 12) THEN
        DBMS_SQL.COLUMN_VALUE(curid, i, datevar);
        -- statements
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      END IF;
    END LOOP;
  END LOOP;

  DBMS_SQL.CLOSE_CURSOR(curid);
END;
/
```

SQL Injection

SQL injection maliciously exploits applications that use client-supplied data in SQL statements, thereby gaining unauthorized access to a database to view or manipulate restricted data.

This section describes SQL injection vulnerabilities in PL/SQL and explains how to guard against them.

Topics

- SQL Injection Techniques
- Guards Against SQL Injection

Example 8-15 Setup for SQL Injection Examples

To try the examples, run these statements.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at SQL Injection Demo

```
DROP TABLE secret_records;
CREATE TABLE secret_records (
  user_name    VARCHAR2(9),
  service_type VARCHAR2(12),
  value        VARCHAR2(30),
  date_created DATE
);

INSERT INTO secret_records (
  user_name, service_type, value, date_created
)
VALUES ('Andy', 'Waiter', 'Serve dinner at Cafe Pete', SYSDATE);

INSERT INTO secret_records (
  user_name, service_type, value, date_created
)
VALUES ('Chuck', 'Merger', 'Buy company XYZ', SYSDATE);
```

SQL Injection Techniques

All SQL injection techniques exploit a single vulnerability: String input is not correctly validated and is concatenated into a dynamic SQL statement.

Topics

- Statement Modification
- Statement Injection

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Data Type Conversion

Statement Modification

Statement modification means deliberately altering a dynamic SQL statement so that it runs in a way unintended by the application developer.

Typically, the user retrieves unauthorized data by changing the `WHERE` clause of a `SELECT` statement or by inserting a `UNION ALL` clause. The classic example of this technique is bypassing password authentication by making a `WHERE` clause always `TRUE`.

Example 8-16 Procedure Vulnerable to Statement Modification

This example creates a procedure that is vulnerable to statement modification and then invokes that procedure with and without statement modification. With statement modification, the procedure returns a supposedly secret record.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at SQL Injection Demo

Create vulnerable procedure:

```
CREATE OR REPLACE PROCEDURE get_record (
  user_name    IN  VARCHAR2,
  service_type IN  VARCHAR2,
  rec          OUT VARCHAR2
) AUTHID DEFINER
IS
  query VARCHAR2(4000);
BEGIN
  -- Following SELECT statement is vulnerable to modification
  -- because it uses concatenation to build WHERE clause.
  query := 'SELECT value FROM secret_records WHERE user_name='''
           || user_name
           || ''' AND service_type='''
           || service_type
           || '''';
  DBMS_OUTPUT.PUT_LINE('Query: ' || query);
  EXECUTE IMMEDIATE query INTO rec ;
  DBMS_OUTPUT.PUT_LINE('Rec: ' || rec );
END;
/
```

Demonstrate procedure without SQL injection:

```
SET SERVEROUTPUT ON;

DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_record('Andy', 'Waiter', record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records WHERE user_name='Andy' AND
service_type='Waiter'
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Rec: Serve dinner at Cafe Pete
```

Example of statement modification:

```
DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_record(
  'Anybody '' OR service_type=''Merger''--',
  'Anything',
  record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records WHERE user_name='Anybody ' OR
service_type='Merger'--' AND service_type='Anything'
Rec: Buy company XYZ

PL/SQL procedure successfully completed.
```

Statement Injection

Statement injection means that a user appends one or more SQL statements to a dynamic SQL statement.

Anonymous PL/SQL blocks are vulnerable to this technique.

Example 8-17 Procedure Vulnerable to Statement Injection

This example creates a procedure that is vulnerable to statement injection and then invokes that procedure with and without statement injection. With statement injection, the procedure deletes the supposedly secret record exposed in Example 8-16.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at SQL Injection Demo

Create vulnerable procedure:

```
CREATE OR REPLACE PROCEDURE p (
  user_name    IN  VARCHAR2,
  service_type IN  VARCHAR2
) AUTHID DEFINER
IS
  block1 VARCHAR2(4000);
BEGIN
  -- Following block is vulnerable to statement injection
  -- because it is built by concatenation.
  block1 :=
    'BEGIN
    DBMS_OUTPUT.PUT_LINE(''user_name: ' || user_name || ''');'
    || 'DBMS_OUTPUT.PUT_LINE(''service_type: ' || service_type || ''');
    END;';

  DBMS_OUTPUT.PUT_LINE('Block1: ' || block1);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  EXECUTE IMMEDIATE block1;
END;
/
```

Demonstrate procedure without SQL injection:

```
SET SERVEROUTPUT ON;

BEGIN
  p('Andy', 'Waiter');
END;
/
```

Result:

```
Block1: BEGIN
         DBMS_OUTPUT.PUT_LINE('user_name: Andy');
         DBMS_OUTPUT.PUT_LINE('service_type: Waiter');
       END;
user_name: Andy
service_type: Waiter
```

SQL*Plus formatting command:

```
COLUMN date_created FORMAT A12;
```

Query:

```
SELECT * FROM secret_records ORDER BY user_name;
```

Result:

```
USER_NAME SERVICE_TYPE VALUE                          DATE_CREATED
--------- ------------ ------------------------------ ------------
Andy      Waiter       Serve dinner at Cafe Pete      28-APR-10
Chuck     Merger       Buy company XYZ                28-APR-10
```

Example of statement modification:

```
BEGIN
  p('Anybody', 'Anything'');
  DELETE FROM secret_records WHERE service_type=INITCAP(''Merger');
END;
/
```

Result:

```
Block1: BEGIN
       DBMS_OUTPUT.PUT_LINE('user_name: Anybody');
       DBMS_OUTPUT.PUT_LINE('service_type: Anything');
       DELETE FROM secret_records WHERE service_type=INITCAP('Merger');
     END;
user_name: Anybody
service_type: Anything

PL/SQL procedure successfully completed.
```

Query:

```
SELECT * FROM secret_records;
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
USER_NAME SERVICE_TYPE VALUE                          DATE_CREATED
--------- ------------ ------------------------------ ------------
Andy      Waiter       Serve dinner at Cafe Pete      18-MAR-09

1 row selected.
```

Data Type Conversion

A less known SQL injection technique uses NLS session parameters to modify or inject SQL statements.

A datetime or numeric value that is concatenated into the text of a dynamic SQL statement must be converted to the `VARCHAR2` data type. The conversion can be either implicit (when the value is an operand of the concatenation operator) or explicit (when the value is the argument of the `TO_CHAR` function). This data type conversion depends on the NLS settings of the database session that runs the dynamic SQL statement. The conversion of datetime values uses format models specified in the parameters `NLS_DATE_FORMAT`, `NLS_TIMESTAMP_FORMAT`, or `NLS_TIMESTAMP_TZ_FORMAT`, depending on the particular datetime data type. The conversion of numeric values applies decimal and group separators specified in the parameter `NLS_NUMERIC_CHARACTERS`.

One datetime format model is `"text"`. The *text* is copied into the conversion result. For example, if the value of `NLS_DATE_FORMAT` is `'"Month:" Month'`, then in June, `TO_CHAR(SYSDATE)` returns `'Month: June'`. The datetime format model can be abused as shown in Example 8-18.

Example 8-18 Procedure Vulnerable to SQL Injection Through Data Type Conversion

```
SELECT * FROM secret_records;
```

Result:

```
USER_NAME SERVICE_TYPE VALUE                          DATE_CREATE
--------- ------------ ------------------------------ -----------
Andy      Waiter       Serve dinner at Cafe Pete      28-APR-2010
Chuck     Merger       Buy company XYZ                28-APR-2010
```

Create vulnerable procedure:

```
-- Return records not older than a month

CREATE OR REPLACE PROCEDURE get_recent_record (
  user_name    IN  VARCHAR2,
  service_type IN  VARCHAR2,
  rec          OUT VARCHAR2
) AUTHID DEFINER
IS
  query VARCHAR2(4000);
BEGIN
  /* Following SELECT statement is vulnerable to modification
     because it uses concatenation to build WHERE clause
     and because SYSDATE depends on the value of NLS_DATE_FORMAT. */

  query := 'SELECT value FROM secret_records WHERE user_name='''
           || user_name
           || ''' AND service_type='''
           || service_type
           || ''' AND date_created>'''
           || (SYSDATE - 30)
           || '''';
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE('Query: ' || query);
  EXECUTE IMMEDIATE query INTO rec;
  DBMS_OUTPUT.PUT_LINE('Rec: ' || rec);
END;
/
```

Demonstrate procedure without SQL injection:

```
SET SERVEROUTPUT ON;
ALTER SESSION SET NLS_DATE_FORMAT='DD-MON-YYYY';

DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_recent_record('Andy', 'Waiter', record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records WHERE user_name='Andy' AND
service_type='Waiter' AND date_created>'29-MAR-2010'
Rec: Serve dinner at Cafe Pete
```

Example of statement modification:

```
ALTER SESSION SET NLS_DATE_FORMAT='"'' OR service_type=''Merger"';

DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_recent_record('Anybody', 'Anything', record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records WHERE user_name='Anybody' AND
service_type='Anything' AND date_created>'' OR service_type='Merger'
Rec: Buy company XYZ

PL/SQL procedure successfully completed.
```

Guards Against SQL Injection

If you use dynamic SQL in your PL/SQL applications, you must check the input text to ensure that it is exactly what you expected.

You can use the following techniques:

- Bind Variables
- Validation Checks
- Explicit Format Models

Bind Variables

The most effective way to make your PL/SQL code invulnerable to SQL injection attacks is to use bind variables.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The database uses the values of bind variables exclusively and does not interpret their contents in any way. (Bind variables also improve performance.)

Example 8-19 Bind Variables Guarding Against SQL Injection

The procedure in this example is invulnerable to SQL injection because it builds the dynamic SQL statement with bind variables (not by concatenation as in the vulnerable procedure in Example 8-16). The same binding technique fixes the vulnerable procedure shown in Example 8-17.

Create invulnerable procedure:

```
CREATE OR REPLACE PROCEDURE get_record_2 (
  user_name    IN  VARCHAR2,
  service_type IN  VARCHAR2,
  rec          OUT VARCHAR2
) AUTHID DEFINER
IS
  query VARCHAR2(4000);
BEGIN
  query := 'SELECT value FROM secret_records
            WHERE user_name=:a
            AND service_type=:b';

  DBMS_OUTPUT.PUT_LINE('Query: ' || query);

  EXECUTE IMMEDIATE query INTO rec USING user_name, service_type;

  DBMS_OUTPUT.PUT_LINE('Rec: ' || rec);
END;
/
```

Demonstrate procedure without SQL injection:

```
SET SERVEROUTPUT ON;
DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_record_2('Andy', 'Waiter', record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records
            WHERE user_name=:a
            AND service_type=:b
Rec: Serve dinner at Cafe Pete

PL/SQL procedure successfully completed.
```

Try statement modification:

```
DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_record_2('Anybody '' OR service_type=''Merger''--',
               'Anything',
               record_value);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Query: SELECT value FROM secret_records
            WHERE user_name=:a
            AND service_type=:b
DECLARE
*
ERROR at line 1:
ORA-01403: no data found
ORA-06512: at "HR.GET_RECORD_2", line 15
ORA-06512: at line 4
```

Validation Checks

Always have your program validate user input to ensure that it is what is intended.

For example, if the user is passing a department number for a `DELETE` statement, check the validity of this department number by selecting from the `departments` table. Similarly, if a user enters the name of a table to be deleted, check that this table exists by selecting from the static data dictionary view `ALL_TABLES`.

> **⚠ Caution**
>
> When checking the validity of a user name and its password, always return the same error regardless of which item is invalid. Otherwise, a malicious user who receives the error message "invalid password" but not "invalid user name" (or the reverse) can realize that they have guessed one of these correctly.

In validation-checking code, the subprograms in the `DBMS_ASSERT` package are often useful. For example, you can use the `DBMS_ASSERT.ENQUOTE_LITERAL` function to enclose a string literal in quotation marks, as Example 8-20 does. This prevents a malicious user from injecting text between an opening quotation mark and its corresponding closing quotation mark.

> **⚠ Caution**
>
> Although the `DBMS_ASSERT` subprograms are useful in validation code, they do not replace it. For example, an input string can be a qualified SQL name (verified by `DBMS_ASSERT.QUALIFIED_SQL_NAME`) and still be a fraudulent password.

> **ⓘ See Also**
>
> *Oracle Database PL/SQL Packages and Types Reference* for information about `DBMS_ASSERT` subprograms

Example 8-20 Validation Checks Guarding Against SQL Injection

In this example, the procedure `raise_emp_salary` checks the validity of the column name that was passed to it before it updates the `employees` table, and then the anonymous block invokes the procedure from both a dynamic PL/SQL block and a dynamic SQL statement.

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE OR REPLACE PROCEDURE raise_emp_salary (
  column_value  NUMBER,
  emp_column    VARCHAR2,
  amount NUMBER ) AUTHID DEFINER
IS
  v_column  VARCHAR2(30);
  sql_stmt  VARCHAR2(200);
BEGIN
  -- Check validity of column name that was given as input:
  SELECT column_name INTO v_column
  FROM USER_TAB_COLS
  WHERE TABLE_NAME = 'EMPLOYEES'
  AND COLUMN_NAME = emp_column;

  sql_stmt := 'UPDATE employees SET salary = salary + :1 WHERE '
    || DBMS_ASSERT.ENQUOTE_NAME(v_column,FALSE) || ' = :2';

  EXECUTE IMMEDIATE sql_stmt USING amount, column_value;

  -- If column name is valid:
  IF SQL%ROWCOUNT > 0 THEN
    DBMS_OUTPUT.PUT_LINE('Salaries were updated for: '
      || emp_column || ' = ' || column_value);
  END IF;

  -- If column name is not valid:
  EXCEPTION
    WHEN NO_DATA_FOUND THEN
      DBMS_OUTPUT.PUT_LINE ('Invalid Column: ' || emp_column);
END raise_emp_salary;
/

DECLARE
  plsql_block  VARCHAR2(500);
BEGIN
  -- Invoke raise_emp_salary from a dynamic PL/SQL block:
  plsql_block :=
    'BEGIN raise_emp_salary(:cvalue, :cname, :amt); END;';

  EXECUTE IMMEDIATE plsql_block
    USING 110, 'DEPARTMENT_ID', 10;

  -- Invoke raise_emp_salary from a dynamic SQL statement:
  EXECUTE IMMEDIATE 'BEGIN raise_emp_salary(:cvalue, :cname, :amt); END;'
    USING 112, 'EMPLOYEE_ID', 10;
END;
/
```

Result:

```
Salaries were updated for: DEPARTMENT_ID = 110
Salaries were updated for: EMPLOYEE_ID = 112
```

Explicit Format Models

Using explicit locale-independent format models to construct SQL is recommended not only from a security perspective, but also to ensure that the dynamic SQL statement runs correctly in any globalization environment.

If you use datetime and numeric values that are concatenated into the text of a SQL or PL/SQL statement, and you cannot pass them as bind variables, convert them to text using explicit

Copyright © 1996, 2025, Oracle and/or its affiliates.

format models that are independent from the values of the NLS parameters of the running session. Ensure that the converted values have the format of SQL datetime or numeric literals.

Example 8-21 Explicit Format Models Guarding Against SQL Injection

This procedure is invulnerable to SQL injection because it converts the datetime parameter value, `SYSDATE - 30`, to a `VARCHAR2` value explicitly, using the `TO_CHAR` function and a locale-independent format model (not implicitly, as in the vulnerable procedure in Example 8-18).

Create invulnerable procedure:

```
-- Return records not older than a month

CREATE OR REPLACE PROCEDURE get_recent_record (
  user_name     IN  VARCHAR2,
  service_type  IN  VARCHAR2,
  rec           OUT VARCHAR2
) AUTHID DEFINER
IS
  query VARCHAR2(4000);
BEGIN
  /* Following SELECT statement is vulnerable to modification
     because it uses concatenation to build WHERE clause. */

  query := 'SELECT value FROM secret_records WHERE user_name='''
           || user_name
           || ''' AND service_type='''
           || service_type
           || ''' AND date_created> DATE '''
           || TO_CHAR(SYSDATE - 30,'YYYY-MM-DD')
           || '''';

  DBMS_OUTPUT.PUT_LINE('Query: ' || query);
  EXECUTE IMMEDIATE query INTO rec;
  DBMS_OUTPUT.PUT_LINE('Rec: ' || rec);
END;
/
```

Try statement modification:

```
ALTER SESSION SET NLS_DATE_FORMAT='"'' OR service_type=''Merger"';

DECLARE
  record_value VARCHAR2(4000);
BEGIN
  get_recent_record('Anybody', 'Anything', record_value);
END;
/
```

Result:

```
Query: SELECT value FROM secret_records WHERE user_name='Anybody' AND
service_type='Anything' AND date_created> DATE '2010-03-29'
DECLARE
*
ERROR at line 1:
ORA-01403: no data found
ORA-06512: at "SYS.GET_RECENT_RECORD", line 21
ORA-06512: at line 4
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

9

PL/SQL Subprograms

A PL/SQL **subprogram** is a named PL/SQL block that can be invoked repeatedly. If the subprogram has parameters, their values can differ for each invocation.

A subprogram is either a procedure or a function. Typically, you use a procedure to perform an action and a function to compute and return a value.

Topics

- Reasons to Use Subprograms
- Nested, Package, and Standalone Subprograms
- Subprogram Invocations
- Subprogram Properties
- Subprogram Parts
- Forward Declaration
- Subprogram Parameters
- Subprogram Invocation Resolution
- Overloaded Subprograms
- Recursive Subprograms
- Subprogram Side Effects
- PL/SQL Function Result Cache
- PL/SQL Functions that SQL Statements Can Invoke
- Invoker's Rights and Definer's Rights (AUTHID Property)
- External Subprograms

Reasons to Use Subprograms

Subprograms support the development and maintenance of reliable, reusable code with the following features:

- **Modularity**

  Subprograms let you break a program into manageable, well-defined modules.

- **Easier Application Design**

  When designing an application, you can defer the implementation details of the subprograms until you have tested the main program, and then refine them one step at a time. (To define a subprogram without implementation details, use the `NULL` statement, as in Example 5-31.)

- **Maintainability**

  You can change the implementation details of a subprogram without changing its invokers.

- **Packageability**

Copyright © 1996, 2025, Oracle and/or its affiliates.

Subprograms can be grouped into packages, whose advantages are explained in "Reasons to Use Packages".

- **Reusability**

  Any number of applications, in many different environments, can use the same package subprogram or standalone subprogram.

- **Better Performance**

  Each subprogram is compiled and stored in executable form, which can be invoked repeatedly. Because stored subprograms run in the database server, a single invocation over the network can start a large job. This division of work reduces network traffic and improves response times. Stored subprograms are cached and shared among users, which lowers memory requirements and invocation overhead.

Subprograms are an important component of other maintainability features, such as packages (explained in PL/SQL Packages) and Abstract Data Types (explained in "Abstract Data Types").

Nested, Package, and Standalone Subprograms

You can create a subprogram either inside a PL/SQL block (which can be another subprogram), inside a package, or at schema level.

A subprogram created inside a PL/SQL block is a **nested subprogram**. You can either declare and define it at the same time, or you can declare it first and then define it later in the same block (see "Forward Declaration"). A nested subprogram is stored in the database only if it is nested in a standalone or package subprogram.

A subprogram created inside a package is a **package subprogram**. You declare it in the package specification and define it in the package body. It is stored in the database until you drop the package. (Packages are described in PL/SQL Packages.)

A subprogram created at schema level is a **standalone subprogram**. You create it with the `CREATE FUNCTION` or `CREATE PROCEDURE` statement. It is stored in the database until you drop it with the `DROP FUNCTION` or `DROP PROCEDURE` statement. (These statements are described in SQL Statements for Stored PL/SQL Units.)

A **stored subprogram** is either a package subprogram or a standalone subprogram. A stored subprogram is affected by the `AUTHID` and `ACCESSIBLE BY` clauses, which can appear in the `CREATE FUNCTION`, `CREATE PROCEDURE`, and `CREATE PACKAGE` statements. The `AUTHID` clause affects the name resolution and privilege checking of SQL statements that the subprogram issues at run time (for more information, see "Invoker's Rights and Definer's Rights (AUTHID Property)"). The `ACCESSIBLE BY` clause specifies a white list of PL/SQL units that can access the subprogram.

Subprogram Invocations

A subprogram invocation has this form:

```
subprogram_name [ ( [ parameter [, parameter]... ] ) ]
```

If the subprogram has no parameters, or specifies a default value for every parameter, you can either omit the parameter list or specify an empty parameter list.

A procedure invocation is a PL/SQL statement. For example:

```
raise_salary(employee_id, amount);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

A function invocation is an expression. For example:

```
new_salary := get_salary(employee_id);
IF salary_ok(new_salary, new_title) THEN ...
```

> **See Also**
>
> "Subprogram Parameters" for more information about specifying parameters in subprogram invocations

Subprogram Properties

Each subprogram property can appear only once in the subprogram declaration. The properties can appear in any order. Properties appear before the `IS` or `AS` keyword in the subprogram heading. The properties cannot appear in nested subprograms.

Only the `ACCESSIBLE BY` property can appear in package subprograms. Standalone subprograms may have the following properties in their declaration.

- ACCESSIBLE BY Clause
- DEFAULT COLLATION Clause
- Invoker's Rights and Definer's Rights (AUTHID Property)

Subprogram Parts

A subprogram begins with a **subprogram heading**, which specifies its name and (optionally) its parameter list.

Like an anonymous block, a subprogram has these parts:

- **Declarative part (optional)**

  This part declares and defines local types, cursors, constants, variables, exceptions, and nested subprograms. These items cease to exist when the subprogram completes execution.

  This part can also specify pragmas.

  > **Note**
  >
  > The declarative part of a subprogram does not begin with the keyword `DECLARE`, as the declarative part of an anonymous block does.

- **Executable part (required)**

  This part contains one or more statements that assign values, control execution, and manipulate data. (Early in the application design process, this part might contain only a `NULL` statement, as in Example 5-31.)

- **Exception-handling part (optional)**

  This part contains code that handles runtime errors.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Additional Parts for Functions
- RETURN Statement

> **See Also**
>
> - "Pragmas"
> - "Procedure Declaration and Definition" for the syntax of procedure declarations and definitions
> - "Subprogram Parameters" for more information about subprogram parameters

Example 9-1 Declaring, Defining, and Invoking a Simple PL/SQL Procedure

In this example, an anonymous block simultaneously declares and defines a procedure and invokes it three times. The third invocation raises the exception that the exception-handling part of the procedure handles.

```
DECLARE
  first_name employees.first_name%TYPE;
  last_name  employees.last_name%TYPE;
  email      employees.email%TYPE;
  employer   VARCHAR2(8) := 'AcmeCorp';

  -- Declare and define procedure

  PROCEDURE create_email (  -- Subprogram heading begins
    name1   VARCHAR2,
    name2   VARCHAR2,
    company VARCHAR2
  )                         -- Subprogram heading ends
  IS
                            -- Declarative part begins
    error_message VARCHAR2(30) := 'Email address is too long.';
  BEGIN                     -- Executable part begins
    email := name1 || '.' || name2 || '@' || company;
  EXCEPTION                       -- Exception-handling part begins
    WHEN VALUE_ERROR THEN
      DBMS_OUTPUT.PUT_LINE(error_message);
  END create_email;

BEGIN
  first_name := 'John';
  last_name  := 'Doe';

  create_email(first_name, last_name, employer);  -- invocation
  DBMS_OUTPUT.PUT_LINE ('With first name first, email is: ' || email);

  create_email(last_name, first_name, employer);  -- invocation
  DBMS_OUTPUT.PUT_LINE ('With last name first, email is: ' || email);

  first_name := 'Elizabeth';
  last_name  := 'MacDonald';
  create_email(first_name, last_name, employer);  -- invocation
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
With first name first, email is: John.Doe@AcmeCorp
With last name first, email is: Doe.John@AcmeCorp
Email address is too long.
```

Additional Parts for Functions

A function has the same structure as a procedure, except that:

- A function heading must include a **`RETURN` clause**, which specifies the data type of the value that the function returns. (A procedure heading cannot have a `RETURN` clause.)
- In the executable part of a function, every execution path must lead to a **`RETURN` statement**. Otherwise, the PL/SQL compiler issues a compile-time warning. (In a procedure, the `RETURN` statement is optional and not recommended. For details, see "RETURN Statement".)
- A function declaration can include these options:

Option	Description
`DETERMINISTIC` option	Helps the optimizer avoid redundant function invocations.
`PARALLEL_ENABLE` option	Enables the function for parallel execution, making it safe for use in concurrent sessions of parallel DML evaluations.
`PIPELINED` option	Makes a table function pipelined, for use as a row source.
`RESULT_CACHE` option	Stores function results in the PL/SQL function result cache.

> **See Also**
>
> - "Function Declaration and Definition" for the syntax of function declarations and definitions, including descriptions of the items in the preceding table
> - "PL/SQL Function Result Cache" for more information about the `RESULT_CACHE` option

Example 9-2 Declaring, Defining, and Invoking a Simple PL/SQL Function

In this example, an anonymous block simultaneously declares and defines a function and invokes it.

```
DECLARE
  -- Declare and define function

  FUNCTION square (original NUMBER)   -- parameter list
    RETURN NUMBER                     -- RETURN clause
  AS
                                      -- Declarative part begins
    original_squared NUMBER;
  BEGIN                               -- Executable part begins
    original_squared := original * original;
    RETURN original_squared;          -- RETURN statement
  END;
BEGIN
  DBMS_OUTPUT.PUT_LINE(square(100));  -- invocation
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
10000
```

RETURN Statement

The `RETURN` statement immediately ends the execution of the subprogram or anonymous block that contains it. A subprogram or anonymous block can contain multiple `RETURN` statements.

Topics

- RETURN Statement in Function
- RETURN Statement in Procedure
- RETURN Statement in Anonymous Block

> **See Also**
>
> "RETURN Statement" for the syntax of the `RETURN` statement

RETURN Statement in Function

In a function, every execution path must lead to a `RETURN` statement and every `RETURN` statement must specify an expression. The `RETURN` statement assigns the value of the expression to the function identifier and returns control to the invoker, where execution resumes immediately after the invocation.

> **Note**
>
> In a pipelined table function, a `RETURN` statement need not specify an expression. For information about the parts of a pipelined table function, see "Creating Pipelined Table Functions".

In Example 9-3, the anonymous block invokes the same function twice. The first time, the `RETURN` statement returns control to the inside of the invoking statement. The second time, the `RETURN` statement returns control to the statement immediately after the invoking statement.

In Example 9-4, the function has multiple `RETURN` statements, but if the parameter is not 0 or 1, then no execution path leads to a `RETURN` statement. The function compiles with warning PLW-05005: subprogram F returns without value at line 11.

Example 9-5 is like Example 9-4, except for the addition of the `ELSE` clause. Every execution path leads to a `RETURN` statement, and the function compiles without warning PLW-05005.

Example 9-3 Execution Resumes After RETURN Statement in Function

```
DECLARE
  x INTEGER;

  FUNCTION f (n INTEGER)
  RETURN INTEGER
  IS
  BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    RETURN (n*n);
  END;

BEGIN
  DBMS_OUTPUT.PUT_LINE (
    'f returns ' || f(2) || '. Execution returns here (1).'
  );

  x := f(2);
  DBMS_OUTPUT.PUT_LINE('Execution returns here (2).');
END;
/
```

Result:

```
f returns 4. Execution returns here (1).Execution returns here (2).
```

Example 9-4 Function Where Not Every Execution Path Leads to RETURN Statement

```
CREATE OR REPLACE FUNCTION f (n INTEGER)
  RETURN INTEGER
  AUTHID DEFINER
IS
BEGIN
  IF n = 0 THEN
    RETURN 1;
  ELSIF n = 1 THEN
    RETURN n;
  END IF;
END;
/
```

Example 9-5 Function Where Every Execution Path Leads to RETURN Statement

```
CREATE OR REPLACE FUNCTION f (n INTEGER)
  RETURN INTEGER
  AUTHID DEFINER
IS
BEGIN
  IF n = 0 THEN
    RETURN 1;
  ELSIF n = 1 THEN
    RETURN n;
  ELSE
    RETURN n*n;
  END IF;
END;
/
BEGIN
  FOR i IN 0 .. 3 LOOP
    DBMS_OUTPUT.PUT_LINE('f(' || i || ') = ' || f(i));
  END LOOP;
END;
/
```

Result:

```
f(0) = 1
f(1) = 1
f(2) = 4
f(3) = 9
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

RETURN Statement in Procedure

In a procedure, the `RETURN` statement returns control to the invoker, where execution resumes immediately after the invocation. The `RETURN` statement cannot specify an expression.

In Example 9-6, the `RETURN` statement returns control to the statement immediately after the invoking statement.

Example 9-6 Execution Resumes After RETURN Statement in Procedure

```
DECLARE
  PROCEDURE p IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Inside p');
    RETURN;
    DBMS_OUTPUT.PUT_LINE('Unreachable statement.');
  END;
BEGIN
  p;
  DBMS_OUTPUT.PUT_LINE('Control returns here.');
END;
/
```

Result:

```
Inside p
Control returns here.
```

RETURN Statement in Anonymous Block

In an anonymous block, the `RETURN` statement exits its own block and all enclosing blocks. The `RETURN` statement cannot specify an expression.

In Example 9-7, the `RETURN` statement exits both the inner and outer block.

Example 9-7 Execution Resumes After RETURN Statement in Anonymous Block

```
BEGIN
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Inside inner block.');
    RETURN;
    DBMS_OUTPUT.PUT_LINE('Unreachable statement.');
  END;
  DBMS_OUTPUT.PUT_LINE('Inside outer block. Unreachable statement.');
END;
/
```

Result:

```
Inside inner block.
```

Forward Declaration

If nested subprograms in the same PL/SQL block invoke each other, then one requires a forward declaration, because a subprogram must be declared before it can be invoked.

A **forward declaration** declares a nested subprogram but does not define it. You must define it later in the same block. The forward declaration and the definition must have the same subprogram heading.

Copyright © 1996, 2025, Oracle and/or its affiliates.

In Example 9-8, an anonymous block creates two procedures that invoke each other.

Example 9-8 Nested Subprograms Invoke Each Other

```
DECLARE
  -- Declare proc1 (forward declaration):
  PROCEDURE proc1(number1 NUMBER);

  -- Declare and define proc2:
  PROCEDURE proc2(number2 NUMBER) IS
  BEGIN
    proc1(number2);
  END;

  -- Define proc 1:
  PROCEDURE proc1(number1 NUMBER) IS
  BEGIN
    proc2 (number1);
  END;

BEGIN
  NULL;
END;
/
```

Subprogram Parameters

If a subprogram has parameters, their values can differ for each invocation.

Topics

- Formal and Actual Subprogram Parameters
- Subprogram Parameter Passing Methods
- Subprogram Parameter Modes
- Subprogram Parameter Aliasing
- Default Values for IN Subprogram Parameters
- Positional, Named, and Mixed Notation for Actual Parameters

Formal and Actual Subprogram Parameters

If you want a subprogram to have parameters, declare **formal parameters** in the subprogram heading. In each formal parameter declaration, specify the name and data type of the parameter, and (optionally) its mode and default value. In the execution part of the subprogram, reference the formal parameters by their names.

When invoking the subprogram, specify the **actual parameters** whose values are to be assigned to the formal parameters. Corresponding actual and formal parameters must have compatible data types.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Note

You can declare a formal parameter of a constrained subtype, like this:

```
DECLARE
  SUBTYPE n1 IS NUMBER(1);
  SUBTYPE v1 IS VARCHAR2(1);

  PROCEDURE p (n n1, v v1) IS ...
```

But you cannot include a constraint in a formal parameter declaration, like this:

```
DECLARE
  PROCEDURE p (n NUMBER(1), v VARCHAR2(1)) IS ...
```

Tip

To avoid confusion, use different names for formal and actual parameters.

Note

- Actual parameters (including default values of formal parameters) can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.
- You cannot use LOB parameters in a server-to-server remote procedure call (RPC).

In Example 9-9, the procedure has formal parameters `emp_id` and `amount`. In the first procedure invocation, the corresponding actual parameters are `emp_num` and `bonus`, whose value are 120 and 100, respectively. In the second procedure invocation, the actual parameters are `emp_num` and `merit + bonus`, whose value are 120 and 150, respectively.

Topics:

- Formal Parameters of Constrained Subtypes

See Also

- "Formal Parameter Declaration" for the syntax and semantics of a formal parameter declaration
- "*function_call ::=*" and "*function_call*" for the syntax and semantics of a function invocation
- "*procedure_call ::=*" and "*procedure*" for the syntax and semantics of a procedure invocation

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 9-9 Formal Parameters and Actual Parameters

```
DECLARE
  emp_num NUMBER(6) := 120;
  bonus   NUMBER(6) := 100;
  merit   NUMBER(4) := 50;

  PROCEDURE raise_salary (
    emp_id NUMBER,  -- formal parameter
    amount NUMBER   -- formal parameter
  ) IS
  BEGIN
    UPDATE employees
    SET salary = salary + amount  -- reference to formal parameter
    WHERE employee_id = emp_id;   -- reference to formal parameter
  END raise_salary;

BEGIN
  raise_salary(emp_num, bonus);          -- actual parameters

  /* raise_salary runs this statement:
       UPDATE employees
       SET salary = salary + 100
       WHERE employee_id = 120;       */

  raise_salary(emp_num, merit + bonus);  -- actual parameters

  /* raise_salary runs this statement:
       UPDATE employees
       SET salary = salary + 150
       WHERE employee_id = 120;       */
END;
/
```

Formal Parameters of Constrained Subtypes

If the data type of a formal parameter is a constrained subtype, then:

- If the subtype has the `NOT NULL` constraint, then the actual parameter inherits it.
- If the subtype has the base type `VARCHAR2`, then the actual parameter does not inherit the size of the subtype.
- If the subtype has a numeric base type, then the actual parameter inherits the range of the subtype, but not the precision or scale.

> **Note**
>
> In a function, the clause `RETURN` *`datatype`* declares a hidden formal parameter and the statement `RETURN` *`value`* specifies the corresponding actual parameter. Therefore, if *`datatype`* is a constrained data type, then the preceding rules apply to *`value`* (see Example 9-11).

Example 9-10 shows that an actual subprogram parameter inherits the `NOT NULL` constraint but not the size of a `VARCHAR2` subtype.

Copyright © 1996, 2025, Oracle and/or its affiliates.

As PL/SQL Predefined Data Types shows, PL/SQL has many predefined data types that are constrained subtypes of other data types. For example, `INTEGER` is a constrained subtype of `NUMBER`:

```
SUBTYPE INTEGER IS NUMBER(38,0);
```

In Example 9-11, the function has both an `INTEGER` formal parameter and an `INTEGER` return type. The anonymous block invokes the function with an actual parameter that is not an integer. Because the actual parameter inherits the range but not the precision and scale of `INTEGER`, and the actual parameter is in the `INTEGER` range, the invocation succeeds. For the same reason, the `RETURN` statement succeeds in returning the noninteger value.

In Example 9-12, the function implicitly converts its formal parameter to the constrained subtype `INTEGER` before returning it.

> **See Also**
>
> "Constrained Subtypes" for general information about constrained subtypes

Example 9-10 Actual Parameter Inherits Only NOT NULL from Subtype

```
DECLARE
  SUBTYPE License IS VARCHAR2(7) NOT NULL;
  n  License := 'DLLLDDD';

  PROCEDURE p (x License) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE(x);
  END;

BEGIN
  p('1ABC123456789');  -- Succeeds; size is not inherited
  p(NULL);             -- Raises error; NOT NULL is inherited
END;
/
```

Result:

```
  p(NULL);             -- Raises error; NOT NULL is inherited
    *
ERROR at line 12:
ORA-06550: line 12, column 5:
PLS-00567: cannot pass NULL to a NOT NULL constrained formal parameter
ORA-06550: line 12, column 3:
PL/SQL: Statement ignored
```

Example 9-11 Actual Parameter and Return Value Inherit Only Range From Subtype

```
DECLARE
  FUNCTION test (p INTEGER) RETURN INTEGER IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('p = ' || p);
    RETURN p;
  END test;

BEGIN
  DBMS_OUTPUT.PUT_LINE('test(p) = ' || test(0.66));
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
p = .66
test(p) = .66

PL/SQL procedure successfully completed.
```

Example 9-12 Function Implicitly Converts Formal Parameter to Constrained Subtype

```
DECLARE
  FUNCTION test (p NUMBER) RETURN NUMBER IS
    q INTEGER := p;  -- Implicitly converts p to INTEGER
  BEGIN
    DBMS_OUTPUT.PUT_LINE('p = ' || q);  -- Display q, not p
    RETURN q;                           -- Return q, not p
  END test;

BEGIN
  DBMS_OUTPUT.PUT_LINE('test(p) = ' || test(0.66));
END;
/
```

Result:

```
p = 1
test(p) = 1

PL/SQL procedure successfully completed.
```

Subprogram Parameter Passing Methods

The PL/SQL compiler has two ways of passing an actual parameter to a subprogram:

- **By reference**

  The compiler passes the subprogram a pointer to the actual parameter. The actual and formal parameters refer to the same memory location.

- **By value**

  The compiler assigns the value of the actual parameter to the corresponding formal parameter. The actual and formal parameters refer to different memory locations.

  If necessary, the compiler implicitly converts the data type of the actual parameter to the data type of the formal parameter. For information about implicit data conversion, see *Oracle Database SQL Language Reference*.

> **Tip**
>
> Avoid implicit data conversion (for the reasons in *Oracle Database SQL Language Reference*), in either of these ways:
>
> – Declare the variables that you intend to use as actual parameters with the same data types as their corresponding formal parameters (as in the declaration of variable x in Example 9-13).
>
> – Explicitly convert actual parameters to the data types of their corresponding formal parameters, using the SQL conversion functions described in *Oracle Database SQL Language Reference* (as in the third invocation of the procedure in Example 9-13).

Copyright © 1996, 2025, Oracle and/or its affiliates.

In Example 9-13, the procedure p has one parameter, n, which is passed by value. The anonymous block invokes p three times, avoiding implicit conversion twice.

The method by which the compiler passes a specific actual parameter depends on its mode, as explained in "Subprogram Parameter Modes".

Example 9-13 Avoiding Implicit Conversion of Actual Parameters

```
CREATE OR REPLACE PROCEDURE p (
  n NUMBER
) AUTHID DEFINER IS
BEGIN
  NULL;
END;
/
DECLARE
  x NUMBER      :=  1;
  y VARCHAR2(1) := '1';
BEGIN
  p(x);             -- No conversion needed
  p(y);             -- z implicitly converted from VARCHAR2 to NUMBER
  p(TO_NUMBER(y));  -- z explicitly converted from VARCHAR2 to NUMBER
END;
/
```

Subprogram Parameter Modes

The **mode** of a formal parameter determines its behavior.

Table 9-1 summarizes and compares the characteristics of the subprogram parameter modes.

Table 9-1 PL/SQL Subprogram Parameter Modes

Parameter Mode	Is Default?	Role
IN	Default mode	Passes a value to the subprogram.
OUT	Must be specified.	Returns a value to the invoker.
IN OUT	Must be specified.	Passes an initial value to the subprogram and returns an updated value to the invoker.

Table 9-2 PL/SQL Subprogram Parameter Modes Characteristics

Parameter Mode	Formal Parameter	Actual Parameter	Passed by Reference ?
IN	Formal parameter acts like a constant: When the subprogram begins, its value is that of either its actual parameter or default value, and the subprogram cannot change this value.	Actual parameter can be a constant, initialized variable, literal, or expression.	Actual parameter is passed by reference.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 9-2 (Cont.) PL/SQL Subprogram Parameter Modes Characteristics

Parameter Mode	Formal Parameter	Actual Parameter	Passed by Reference ?
OUT	Formal parameter is initialized to the default value of its type. The default value of the type is `NULL` except for a record type with a non-`NULL` default value (see Example 9-16). When the subprogram begins, the formal parameter has its initial value regardless of the value of its actual parameter. Oracle recommends that the subprogram assign a value to the formal parameter.	If the default value of the formal parameter type is `NULL`, then the actual parameter must be a variable whose data type is not defined as `NOT NULL`.	By default, actual parameter is passed by value; if you specify `NOCOPY`, it might be passed by reference.
IN OUT	Formal parameter acts like an initialized variable: When the subprogram begins, its value is that of its actual parameter. Oracle recommends that the subprogram update its value.	Actual parameter must be a variable (typically, it is a string buffer or numeric accumulator).	By default, actual parameter is passed by value (in both directions); if you specify `NOCOPY`, it might be passed by reference.

Tip

Do not use `OUT` and `IN OUT` for function parameters. Ideally, a function takes zero or more parameters and returns a single value. A function with `IN OUT` parameters returns multiple values and has side effects.

Note

The specifications of many packages and types that Oracle Database supplies declare formal parameters with this notation:

```
i1 IN VARCHAR2 CHARACTER SET ANY_CS
i2 IN VARCHAR2 CHARACTER SET i1%CHARSET
```

Do not use this notation when declaring your own formal or actual parameters. It is reserved for Oracle implementation of the supplied packages types.

Regardless of how an `OUT` or `IN OUT` parameter is passed:

- If the subprogram exits successfully, then the value of the actual parameter is the final value assigned to the formal parameter. (The formal parameter is assigned at least one value—the initial value.)
- If the subprogram ends with an exception, then the value of the actual parameter is undefined.
- Formal `OUT` and `IN OUT` parameters can be returned in any order. In this example, the final values of `x` and `y` are undefined:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE OR REPLACE PROCEDURE p (x OUT INTEGER, y OUT INTEGER) AS
BEGIN
  x := 17; y := 93;
END;
/
```

When an `OUT` or `IN OUT` parameter is passed by reference, the actual and formal parameters refer to the same memory location. Therefore, if the subprogram changes the value of the formal parameter, the change shows immediately in the actual parameter (see "Subprogram Parameter Aliasing with Parameters Passed by Reference").

In Example 9-14, the procedure `p` has two `IN` parameters, one `OUT` parameter, and one `IN OUT` parameter. The `OUT` and `IN OUT` parameters are passed by value (the default). The anonymous block invokes `p` twice, with different actual parameters. Before each invocation, the anonymous block prints the values of the actual parameters. The procedure `p` prints the initial values of its formal parameters. After each invocation, the anonymous block prints the values of the actual parameters again.

In Example 9-15, the anonymous block invokes procedure `p` (from Example 9-14) with an actual parameter that causes `p` to raise the predefined exception `ZERO_DIVIDE`, which `p` does not handle. The exception propagates to the anonymous block, which handles `ZERO_DIVIDE` and shows that the actual parameters for the `IN` and `IN OUT` parameters of `p` have retained the values that they had before the invocation. (Exception propagation is explained in "Exception Propagation".)

In Example 9-16, the procedure `p` has three `OUT` formal parameters: `x`, of a record type with a non-`NULL` default value; `y`, of a record type with no non-`NULL` default value; and `z`, which is not a record.

The corresponding actual parameters for `x`, `y`, and `z` are `r1`, `r2`, and `s`, respectively. `s` is declared with an initial value. However, when `p` is invoked, the value of `s` is initialized to `NULL`. The values of `r1` and `r2` are initialized to the default values of their record types, `'abcde'` and `NULL`, respectively.

Example 9-14 Parameter Values Before, During, and After Procedure Invocation

```
CREATE OR REPLACE PROCEDURE p (
  a        PLS_INTEGER,  -- IN by default
  b     IN PLS_INTEGER,
  c    OUT PLS_INTEGER,
  d IN OUT BINARY_FLOAT
) AUTHID DEFINER IS
BEGIN
  -- Print values of parameters:

  DBMS_OUTPUT.PUT_LINE('Inside procedure p:');

  DBMS_OUTPUT.PUT('IN a = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(a), 'NULL'));

  DBMS_OUTPUT.PUT('IN b = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(b), 'NULL'));

  DBMS_OUTPUT.PUT('OUT c = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(c), 'NULL'));

  DBMS_OUTPUT.PUT_LINE('IN OUT d = ' || TO_CHAR(d));

  -- Can reference IN parameters a and b,
  -- but cannot assign values to them.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  c := a+10;  -- Assign value to OUT parameter
  d := 10/b;  -- Assign value to IN OUT parameter
END;
/
DECLARE
  aa  CONSTANT PLS_INTEGER := 1;
  bb  PLS_INTEGER  := 2;
  cc  PLS_INTEGER  := 3;
  dd  BINARY_FLOAT := 4;
  ee  PLS_INTEGER;
  ff  BINARY_FLOAT := 5;
BEGIN
  DBMS_OUTPUT.PUT_LINE('Before invoking procedure p:');

  DBMS_OUTPUT.PUT('aa = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(aa), 'NULL'));

  DBMS_OUTPUT.PUT('bb = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(bb), 'NULL'));

  DBMS_OUTPUT.PUT('cc = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(cc), 'NULL'));

  DBMS_OUTPUT.PUT_LINE('dd = ' || TO_CHAR(dd));

  p (aa, -- constant
     bb, -- initialized variable
     cc, -- initialized variable
     dd  -- initialized variable
  );

  DBMS_OUTPUT.PUT_LINE('After invoking procedure p:');

  DBMS_OUTPUT.PUT('aa = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(aa), 'NULL'));

  DBMS_OUTPUT.PUT('bb = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(bb), 'NULL'));

  DBMS_OUTPUT.PUT('cc = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(cc), 'NULL'));

  DBMS_OUTPUT.PUT_LINE('dd = ' || TO_CHAR(dd));

  DBMS_OUTPUT.PUT_LINE('Before invoking procedure p:');

  DBMS_OUTPUT.PUT('ee = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(ee), 'NULL'));

  DBMS_OUTPUT.PUT_LINE('ff = ' || TO_CHAR(ff));

  p (1,        -- literal
     (bb+3)*4, -- expression
     ee,       -- uninitialized variable
     ff        -- initialized variable
   );

  DBMS_OUTPUT.PUT_LINE('After invoking procedure p:');

  DBMS_OUTPUT.PUT('ee = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(ee), 'NULL'));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE('ff = ' || TO_CHAR(ff));
END;
/
```

Result:

```
Before invoking procedure p:
aa = 1
bb = 2
cc = 3
dd = 4.0E+000
Inside procedure p:
IN a = 1
IN b = 2
OUT c = NULL
IN OUT d = 4.0E+000
After invoking procedure p:
aa = 1
bb = 2
cc = 11
dd = 5.0E+000
Before invoking procedure p:
ee = NULL
ff = 5.0E+000
Inside procedure p:
IN a = 1
IN b = 20
OUT c = NULL
IN OUT d = 5.0E+000
After invoking procedure p:
ee = 11
ff = 5.0E-001

PL/SQL procedure successfully completed.
```

Example 9-15 OUT and IN OUT Parameter Values After Exception Handling

```
DECLARE
  j  PLS_INTEGER  := 10;
  k  BINARY_FLOAT := 15;
BEGIN
  DBMS_OUTPUT.PUT_LINE('Before invoking procedure p:');

  DBMS_OUTPUT.PUT('j = ');
  DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(j), 'NULL'));

  DBMS_OUTPUT.PUT_LINE('k = ' || TO_CHAR(k));

  p(4, 0, j, k);  -- causes p to exit with exception ZERO_DIVIDE

EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('After invoking procedure p:');

    DBMS_OUTPUT.PUT('j = ');
    DBMS_OUTPUT.PUT_LINE(NVL(TO_CHAR(j), 'NULL'));

    DBMS_OUTPUT.PUT_LINE('k = ' || TO_CHAR(k));
END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Before invoking procedure p:
j = 10
k = 1.5E+001
Inside procedure p:
IN a = 4
IN b = 0
OUT c = NULL
IN OUT d = 1.5E+001
After invoking procedure p:
j = 10
k = 1.5E+001

PL/SQL procedure successfully completed.
```

Example 9-16 OUT Formal Parameter of Record Type with Non-NULL Default Value

```
CREATE OR REPLACE PACKAGE r_types AUTHID DEFINER IS
  TYPE r_type_1 IS RECORD (f VARCHAR2(5) := 'abcde');
  TYPE r_type_2 IS RECORD (f VARCHAR2(5));
END;
/

CREATE OR REPLACE PROCEDURE p (
  x OUT r_types.r_type_1,
  y OUT r_types.r_type_2,
  z OUT VARCHAR2)
AUTHID CURRENT_USER IS
BEGIN
  DBMS_OUTPUT.PUT_LINE('x.f is ' || NVL(x.f,'NULL'));
  DBMS_OUTPUT.PUT_LINE('y.f is ' || NVL(y.f,'NULL'));
  DBMS_OUTPUT.PUT_LINE('z is ' || NVL(z,'NULL'));
END;
/
DECLARE
  r1 r_types.r_type_1;
  r2 r_types.r_type_2;
  s  VARCHAR2(5) := 'fghij';
BEGIN
  p (r1, r2, s);
END;
/
```

Result:

```
x.f is abcde
y.f is NULL
z is NULL

PL/SQL procedure successfully completed.
```

Subprogram Parameter Aliasing

Aliasing is having two different names for the same memory location. If a stored item is visible by more than one path, and you can change the item by one path, then you can see the change by all paths.

Subprogram parameter aliasing always occurs when the compiler passes an actual parameter by reference, and can also occur when a subprogram has cursor variable parameters.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Subprogram Parameter Aliasing with Parameters Passed by Reference
- Subprogram Parameter Aliasing with Cursor Variable Parameters

Subprogram Parameter Aliasing with Parameters Passed by Reference

When the compiler passes an actual parameter by reference, the actual and formal parameters refer to the same memory location. Therefore, if the subprogram changes the value of the formal parameter, the change shows immediately in the actual parameter.

The compiler always passes `IN` parameters by reference, but the resulting aliasing cannot cause problems, because subprograms cannot assign values to `IN` parameters.

The compiler *might* pass an `OUT` or `IN OUT` parameter by reference, if you specify `NOCOPY` for that parameter. `NOCOPY` is only a hint—each time the subprogram is invoked, the compiler decides, silently, whether to obey or ignore `NOCOPY`. Therefore, aliasing can occur for one invocation but not another, making subprogram results indeterminate. For example:

- If the actual parameter is a global variable, then an assignment to the formal parameter *might* show in the global parameter (see Example 9-17).
- If the same variable is the actual parameter for two formal parameters, then an assignment to either formal parameter *might* show immediately in both formal parameters (see Example 9-18).
- If the actual parameter is a package variable, then an assignment to either the formal parameter or the package variable *might* show immediately in both the formal parameter and the package variable.
- If the subprogram is exited with an unhandled exception, then an assignment to the formal parameter *might* show in the actual parameter.

> **See Also**
>
> "NOCOPY" for the cases in which the compiler always ignores `NOCOPY`

In Example 9-17, the procedure has an `IN OUT NOCOPY` formal parameter, to which it assigns the value `'aardvark'`. The anonymous block assigns the value `'aardwolf'` to a global variable and then passes the global variable to the procedure. If the compiler obeys the `NOCOPY` hint, then the final value of the global variable is `'aardvark'`. If the compiler ignores the `NOCOPY` hint, then the final value of the global variable is `'aardwolf'`.

In Example 9-18, the procedure has an `IN` parameter, an `IN OUT` parameter, and an `IN OUT NOCOPY` parameter. The anonymous block invokes the procedure, using the same actual parameter, a global variable, for all three formal parameters. The procedure changes the value of the `IN OUT` parameter before it changes the value of the `IN OUT NOCOPY` parameter. However, if the compiler obeys the `NOCOPY` hint, then the latter change shows in the actual parameter immediately. The former change shows in the actual parameter after the procedure is exited successfully and control returns to the anonymous block.

Example 9-17 Aliasing from Global Variable as Actual Parameter

```
DECLARE
  TYPE Definition IS RECORD (
    word     VARCHAR2(20),
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    meaning  VARCHAR2(200)
  );

  TYPE Dictionary IS VARRAY(2000) OF Definition;

  lexicon  Dictionary := Dictionary();  -- global variable

  PROCEDURE add_entry (
    word_list IN OUT NOCOPY Dictionary  -- formal NOCOPY parameter
  ) IS
  BEGIN
    word_list(1).word := 'aardvark';
  END;

BEGIN
  lexicon.EXTEND;
  lexicon(1).word := 'aardwolf';
  add_entry(lexicon);  -- global variable is actual parameter
  DBMS_OUTPUT.PUT_LINE(lexicon(1).word);
END;
/
```

Result:

```
aardvark
```

Example 9-18 Aliasing from Same Actual Parameter for Multiple Formal Parameters

```
DECLARE
  n NUMBER := 10;

  PROCEDURE p (
    n1 IN NUMBER,
    n2 IN OUT NUMBER,
    n3 IN OUT NOCOPY NUMBER
  ) IS
  BEGIN
    n2 := 20;  -- actual parameter is 20 only after procedure succeeds
    DBMS_OUTPUT.put_line(n1);  -- actual parameter value is still 10
    n3 := 30;  -- might change actual parameter immediately
    DBMS_OUTPUT.put_line(n1);  -- actual parameter value is either 10 or 30
  END;

BEGIN
  p(n, n, n);
  DBMS_OUTPUT.put_line(n);
END;
/
```

Result if the compiler obeys the `NOCOPY` hint:

```
10
30
20
```

Result if the compiler ignores the `NOCOPY` hint:

```
10
10
30
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Subprogram Parameter Aliasing with Cursor Variable Parameters

Cursor variable parameters are pointers. Therefore, if a subprogram assigns one cursor variable parameter to another, they refer to the same memory location. This aliasing can have unintended results.

In Example 9-19, the procedure has two cursor variable parameters, `emp_cv1` and `emp_cv2`. The procedure opens `emp_cv1` and assigns its value (which is a pointer) to `emp_cv2`. Now `emp_cv1` and `emp_cv2` refer to the same memory location. When the procedure closes `emp_cv1`, it also closes `emp_cv2`. Therefore, when the procedure tries to fetch from `emp_cv2`, PL/SQL raises an exception.

Example 9-19 Aliasing from Cursor Variable Subprogram Parameters

```
DECLARE
  TYPE EmpCurTyp IS REF CURSOR;
  c1 EmpCurTyp;
  c2 EmpCurTyp;

  PROCEDURE get_emp_data (
    emp_cv1 IN OUT EmpCurTyp,
    emp_cv2 IN OUT EmpCurTyp
  )
  IS
    emp_rec employees%ROWTYPE;
  BEGIN
    OPEN emp_cv1 FOR SELECT * FROM employees;
    emp_cv2 := emp_cv1;  -- now both variables refer to same location
    FETCH emp_cv1 INTO emp_rec;  -- fetches first row of employees
    FETCH emp_cv1 INTO emp_rec;  -- fetches second row of employees
    FETCH emp_cv2 INTO emp_rec;  -- fetches third row of employees
    CLOSE emp_cv1;  -- closes both variables
    FETCH emp_cv2 INTO emp_rec; -- causes error when get_emp_data is invoked
  END;
BEGIN
  get_emp_data(c1, c2);
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-01001: cursor number is invalid or does not exist
ORA-06512: at line 19
ORA-06512: at line 22
```

Default Values for IN Subprogram Parameters

When you declare a formal `IN` parameter, you can specify a default value for it. A formal parameter with a default value is called an **optional parameter**, because its corresponding actual parameter is optional in a subprogram invocation. If the actual parameter is omitted, then the invocation assigns the default value to the formal parameter. A formal parameter with no default value is called a **required parameter**, because its corresponding actual parameter is required in a subprogram invocation.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Omitting an actual parameter does not make the value of the corresponding formal parameter `NULL`. To make the value of a formal parameter `NULL`, specify `NULL` as either the default value or the actual parameter.

In Example 9-20, the procedure has one required parameter and two optional parameters.

In Example 9-20, the procedure invocations specify the actual parameters in the same order as their corresponding formal parameters are declared—that is, the invocations use positional notation. Positional notation does not let you omit the second parameter of `raise_salary` but specify the third; to do that, you must use either named or mixed notation. For more information, see "Positional, Named, and Mixed Notation for Actual Parameters".

The default value of a formal parameter can be any expression whose value can be assigned to the parameter; that is, the value and parameter must have compatible data types. If a subprogram invocation specifies an actual parameter for the formal parameter, then that invocation does not evaluate the default value.

In Example 9-21, the procedure `p` has a parameter whose default value is an invocation of the function `f`. The function `f` increments the value of a global variable. When `p` is invoked without an actual parameter, `p` invokes `f`, and `f` increments the global variable. When `p` is invoked with an actual parameter, `p` does not invoke `f`, and value of the global variable does not change.

Example 9-22 creates a procedure with two required parameters, invokes it, and then adds a third, optional parameter. Because the third parameter is optional, the original invocation remains valid.

Example 9-20 Procedure with Default Parameter Values

```
DECLARE
  PROCEDURE raise_salary (
    emp_id IN employees.employee_id%TYPE,
    amount IN employees.salary%TYPE := 100,
    extra  IN employees.salary%TYPE := 50
  ) IS
  BEGIN
    UPDATE employees
    SET salary = salary + amount + extra
    WHERE employee_id = emp_id;
  END raise_salary;

BEGIN
  raise_salary(120);       -- same as raise_salary(120, 100, 50)
  raise_salary(121, 200);  -- same as raise_salary(121, 200, 50)
END;
/
```

Example 9-21 Function Provides Default Parameter Value

```
DECLARE
  global PLS_INTEGER := 0;

  FUNCTION f RETURN PLS_INTEGER IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Inside f.');
    global := global + 1;
    RETURN global * 2;
  END f;

  PROCEDURE p (
    x IN PLS_INTEGER := f()
  ) IS
  BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    DBMS_OUTPUT.PUT_LINE (
      'Inside p. ' ||
      '  global = ' || global ||
      ', x = ' || x || '.'
    );
    DBMS_OUTPUT.PUT_LINE('-------------------------------');
  END p;

  PROCEDURE pre_p IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE (
     'Before invoking p,  global = ' || global || '.'
    );
    DBMS_OUTPUT.PUT_LINE('Invoking p.');
  END pre_p;

BEGIN
  pre_p;
  p();     -- default expression is evaluated

  pre_p;
  p(100);  -- default expression is not evaluated

  pre_p;
  p();     -- default expression is evaluated
END;
/
```

Result:

```
Before invoking p,  global = 0.
Invoking p.
Inside f.
Inside p.   global = 1, x = 2.
-------------------------------
Before invoking p,  global = 1.
Invoking p.
Inside p.   global = 1, x = 100.
-------------------------------
Before invoking p,  global = 1.
Invoking p.
Inside f.
Inside p.   global = 2, x = 4.
-------------------------------
```

Example 9-22 Adding Subprogram Parameter Without Changing Existing Invocations

Create procedure:

```
CREATE OR REPLACE PROCEDURE print_name (
  first VARCHAR2,
  last VARCHAR2
) AUTHID DEFINER IS
BEGIN
  DBMS_OUTPUT.PUT_LINE(first || ' ' || last);
END print_name;
/
```

Invoke procedure:

```
BEGIN
  print_name('John', 'Doe');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
John Doe
```

Add third parameter with default value:

```
CREATE OR REPLACE PROCEDURE print_name (
  first VARCHAR2,
  last VARCHAR2,
  mi   VARCHAR2 := NULL
) AUTHID DEFINER IS
BEGIN
  IF mi IS NULL THEN
    DBMS_OUTPUT.PUT_LINE(first || ' ' || last);
  ELSE
    DBMS_OUTPUT.PUT_LINE(first || ' ' || mi || '. ' || last);
  END IF;
END print_name;
/
```

Invoke procedure:

```
BEGIN
  print_name('John', 'Doe');          -- original invocation
  print_name('John', 'Public', 'Q');  -- new invocation
END;
/
```

Result:

```
John Doe
John Q. Public
```

Positional, Named, and Mixed Notation for Actual Parameters

When invoking a subprogram, you can specify the actual parameters using either positional, named, or mixed notation. Table 9-3 summarizes and compares these notations.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 9-3 PL/SQL Actual Parameter Notations

Notation	Syntax	Optional parameters	Advantages	Disadvantages
Positional	Specify the actual parameters in the same order as the formal parameters are declared.	You can omit trailing optional parameters.		Specifying actual parameters in the wrong order can cause problems that are hard to detect, especially if the actual parameters are literals. Subprogram invocations must change if the formal parameter list changes, unless the list only acquires new trailing optional parameters (as in Example 9-22). Reduced code clarity and maintainability. Not recommended if the subprogram has a large number of parameters.
Named	Specify the actual parameters in any order, using this syntax: *formal* => *actual* *formal* is the name of the formal parameter and *actual* is the actual parameter.	You can omit any optional parameters.	There is no wrong order for specifying actual parameters. Subprogram invocations must change only if the formal parameter list acquires new required parameters. Recommended when you invoke a subprogram defined or maintained by someone else.	
Mixed	Start with positional notation, then use named notation for the remaining parameters.	In the positional notation, you can omit trailing optional parameters; in the named notation, you can omit any optional parameters.	Convenient when you invoke a subprogram that has required parameters followed by optional parameters, and you must specify only a few of the optional parameters.	In the positional notation, the wrong order can cause problems that are hard to detect, especially if the actual parameters are literals. Changes to the formal parameter list might require changes in the positional notation.

In Example 9-23, the procedure invocations use different notations, but are equivalent.

In Example 9-24, the SQL `SELECT` statements invoke the PL/SQL function `compute_bonus`, using equivalent invocations with different notations.

Example 9-23 Equivalent Invocations with Different Notations in Anonymous Block

```
DECLARE
  emp_num NUMBER(6) := 120;
  bonus   NUMBER(6) := 50;

  PROCEDURE raise_salary (
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    emp_id NUMBER,
    amount NUMBER
  ) IS
  BEGIN
    UPDATE employees
    SET salary = salary + amount
    WHERE employee_id = emp_id;
  END raise_salary;

BEGIN
  -- Equivalent invocations:

  raise_salary(emp_num, bonus);                      -- positional notation
  raise_salary(amount => bonus, emp_id => emp_num);  -- named notation
  raise_salary(emp_id => emp_num, amount => bonus);  -- named notation
  raise_salary(emp_num, amount => bonus);            -- mixed notation
END;
/
```

Example 9-24 Equivalent Invocations with Different Notations in SELECT Statements

```
CREATE OR REPLACE FUNCTION compute_bonus (
  emp_id NUMBER,
  bonus NUMBER
) RETURN NUMBER
  AUTHID DEFINER
IS
  emp_sal NUMBER;
BEGIN
  SELECT salary INTO emp_sal
  FROM employees
  WHERE employee_id = emp_id;

  RETURN emp_sal + bonus;
END compute_bonus;
/
SELECT compute_bonus(120, 50) FROM DUAL;                   -- positional
SELECT compute_bonus(bonus => 50, emp_id => 120) FROM DUAL; -- named
SELECT compute_bonus(120, bonus => 50) FROM DUAL;           -- mixed
```

Subprogram Invocation Resolution

When the PL/SQL compiler encounters a subprogram invocation, it searches for a matching subprogram declaration—first in the current scope and then, if necessary, in successive enclosing scopes.

A declaration and invocation match if their subprogram names and parameter lists match. The parameter lists match if each required formal parameter in the declaration has a corresponding actual parameter in the invocation.

If the compiler finds no matching declaration for an invocation, then it generates a semantic error.

Figure 9-1 shows how the PL/SQL compiler resolves a subprogram invocation.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Figure 9-1 How PL/SQL Compiler Resolves Invocations

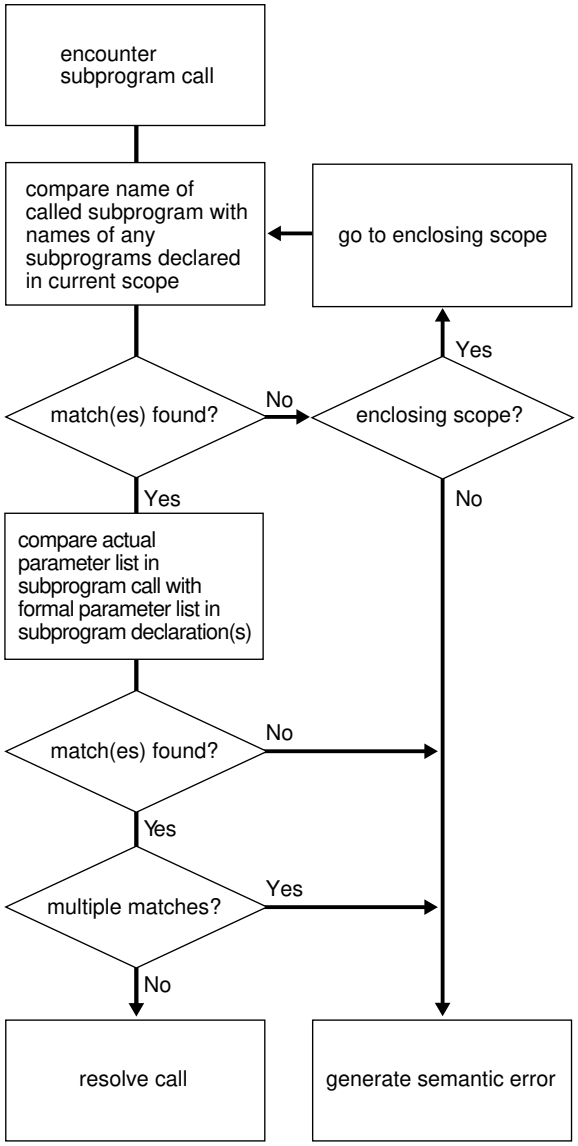

In Example 9-25, the function `balance` tries to invoke the enclosing procedure `swap`, using appropriate actual parameters. However, `balance` contains two nested procedures named `swap`, and neither has parameters of the same type as the enclosing procedure `swap`. Therefore, the invocation causes compilation error PLS-00306.

Example 9-25 Resolving PL/SQL Procedure Names

```
DECLARE
  PROCEDURE swap (
    n1 NUMBER,
    n2 NUMBER
  )
  IS
    num1 NUMBER;
    num2 NUMBER;

    FUNCTION balance
      (bal NUMBER)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      RETURN NUMBER
    IS
      x NUMBER := 10;

      PROCEDURE swap (
        d1 DATE,
        d2 DATE
      ) IS
      BEGIN
        NULL;
      END;

      PROCEDURE swap (
        b1 BOOLEAN,
        b2 BOOLEAN
      ) IS
      BEGIN
        NULL;
      END;

    BEGIN  -- balance
      swap(num1, num2);
      RETURN x;
    END balance;

  BEGIN  -- enclosing procedure swap
    NULL;
  END swap;

BEGIN  -- anonymous block
  NULL;
END;   -- anonymous block
/
```

Result:

```
      swap(num1, num2);
      *
ERROR at line 33:
ORA-06550: line 33, column 7:
PLS-00306: wrong number or types of arguments in call to 'SWAP'
ORA-06550: line 33, column 7:
PL/SQL: Statement ignored
```

Overloaded Subprograms

PL/SQL lets you overload nested subprograms, package subprograms, and type methods. You can use the same name for several different subprograms if their formal parameters differ in name, number, order, or data type family. (A **data type family** is a data type and its subtypes. For the data type families of predefined PL/SQL data types, see PL/SQL Predefined Data Types. For information about user-defined PL/SQL subtypes, see "User-Defined PL/SQL Subtypes".) If formal parameters differ only in name, then you must use named notation to specify the corresponding actual parameters. (For information about named notation, see "Positional, Named, and Mixed Notation for Actual Parameters".)

Example 9-26 defines two subprograms with the same name, `initialize`. The procedures initialize different types of collections. Because the processing in the procedures is the same, it is logical to give them the same name.

Copyright © 1996, 2025, Oracle and/or its affiliates.

You can put the two `initialize` procedures in the same block, subprogram, package, or type body. PL/SQL determines which procedure to invoke by checking their formal parameters. The version of `initialize` that PL/SQL uses depends on whether you invoke the procedure with a `date_tab_typ` or `num_tab_typ` parameter.

For an example of an overloaded procedure in a package, see Example 11-9.

Topics

- Formal Parameters that Differ Only in Numeric Data Type
- Subprograms that You Cannot Overload
- Subprogram Overload Errors

Example 9-26 Overloaded Subprogram

```
DECLARE
  TYPE date_tab_typ IS TABLE OF DATE   INDEX BY PLS_INTEGER;
  TYPE num_tab_typ  IS TABLE OF NUMBER INDEX BY PLS_INTEGER;

  hiredate_tab  date_tab_typ;
  sal_tab       num_tab_typ;

  PROCEDURE initialize (tab OUT date_tab_typ, n INTEGER) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Invoked first version');
    FOR i IN 1..n LOOP
      tab(i) := SYSDATE;
    END LOOP;
  END initialize;

  PROCEDURE initialize (tab OUT num_tab_typ, n INTEGER) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Invoked second version');
    FOR i IN 1..n LOOP
      tab(i) := 0.0;
    END LOOP;
  END initialize;

BEGIN
  initialize(hiredate_tab, 50);
  initialize(sal_tab, 100);
END;
/
```

Result:

```
Invoked first version
Invoked second version
```

Formal Parameters that Differ Only in Numeric Data Type

You can overload subprograms if their formal parameters differ only in numeric data type. This technique is useful in writing mathematical application programming interfaces (APIs), because several versions of a function can use the same name, and each can accept a different numeric type. For example, a function that accepts `BINARY_FLOAT` might be faster, while a function that accepts `BINARY_DOUBLE` might be more precise.

To avoid problems or unexpected results when passing parameters to such overloaded subprograms:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Ensure that the expected version of a subprogram is invoked for each set of expected parameters.

  For example, if you have overloaded functions that accept `BINARY_FLOAT` and `BINARY_DOUBLE`, which is invoked if you pass a `VARCHAR2` literal like `'5.0'`?

- Qualify numeric literals and use conversion functions to make clear what the intended parameter types are.

  For example, use literals such as `5.0f` (for `BINARY_FLOAT`), `5.0d` (for `BINARY_DOUBLE`), or conversion functions such as `TO_BINARY_FLOAT`, `TO_BINARY_DOUBLE`, and `TO_NUMBER`.

PL/SQL looks for matching numeric parameters in this order:

1. `PLS_INTEGER` (or `BINARY_INTEGER`, an identical data type)
2. `NUMBER`
3. `BINARY_FLOAT`
4. `BINARY_DOUBLE`

A `VARCHAR2` value can match a `NUMBER`, `BINARY_FLOAT`, or `BINARY_DOUBLE` parameter.

PL/SQL uses the first overloaded subprogram that matches the supplied parameters. For example, the `SQRT` function takes a single parameter. There are overloaded versions that accept a `NUMBER`, a `BINARY_FLOAT`, or a `BINARY_DOUBLE` parameter. If you pass a `PLS_INTEGER` parameter, the first matching overload is the one with a `NUMBER` parameter.

The `SQRT` function that takes a `NUMBER` parameter is likely to be slowest. To use a faster version, use the `TO_BINARY_FLOAT` or `TO_BINARY_DOUBLE` function to convert the parameter to another data type before passing it to the `SQRT` function.

If PL/SQL must convert a parameter to another data type, it first tries to convert it to a higher data type. For example:

- The `ATAN2` function takes two parameters of the same type. If you pass parameters of different types—for example, one `PLS_INTEGER` and one `BINARY_FLOAT`—PL/SQL tries to find a match where both parameters use the higher type. In this case, that is the version of `ATAN2` that takes two `BINARY_FLOAT` parameters; the `PLS_INTEGER` parameter is converted upwards.
- A function takes two parameters of different types. One overloaded version takes a `PLS_INTEGER` and a `BINARY_FLOAT` parameter. Another overloaded version takes a `NUMBER` and a `BINARY_DOUBLE` parameter. If you invoke this function and pass two `NUMBER` parameters, PL/SQL first finds the overloaded version where the second parameter is `BINARY_FLOAT`. Because this parameter is a closer match than the `BINARY_DOUBLE` parameter in the other overload, PL/SQL then looks downward and converts the first `NUMBER` parameter to `PLS_INTEGER`.

Subprograms that You Cannot Overload

You cannot overload these subprograms:

- Standalone subprograms
- Subprograms whose formal parameters differ only in mode; for example:

```
PROCEDURE s (p IN  VARCHAR2) IS ...
PROCEDURE s (p OUT VARCHAR2) IS ...
```

- Subprograms whose formal parameters differ only in subtype; for example:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
PROCEDURE s (p INTEGER) IS ...
PROCEDURE s (p REAL) IS ...
```

`INTEGER` and `REAL` are subtypes of `NUMBER`, so they belong to the same data type family.

- Functions that differ only in return value data type, even if the data types are in different families; for example:

```
FUNCTION f (p INTEGER) RETURN BOOLEAN IS ...
FUNCTION f (p INTEGER) RETURN INTEGER IS ...
```

Subprogram Overload Errors

The PL/SQL compiler catches overload errors as soon as it determines that it cannot tell which subprogram was invoked. When subprograms have identical headings, the compiler catches the overload error when you try to compile the subprograms themselves (if they are nested) or when you try to compile the package specification that declares them. Otherwise, the compiler catches the error when you try to compile an ambiguous invocation of a subprogram.

When you try to compile the package specification in Example 9-27, which declares subprograms with identical headings, you get compile-time error PLS-00305.

Although the package specification in Example 9-28 violates the rule that you cannot overload subprograms whose formal parameters differ only in subtype, you can compile it without error.

However, when you try to compile an invocation of `pkg2.s`, as in Example 9-29, you get compile-time error PLS-00307.

Suppose that you correct the overload error in Example 9-28 by giving the formal parameters of the overloaded subprograms different names, as in Example 9-30.

Now you can compile an invocation of `pkg2.s` without error if you specify the actual parameter with named notation, as in Example 9-31. (If you specify the actual parameter with positional notation, as in Example 9-29, you still get compile-time error PLS-00307.)

The package specification in Example 9-32 violates no overload rules and compiles without error. However, you can still get compile-time error PLS-00307 when invoking its overloaded procedure, as in the second invocation in Example 9-33.

When trying to determine which subprogram was invoked, if the PL/SQL compiler implicitly converts one parameter to a matching type, then the compiler looks for other parameters that it can implicitly convert to matching types. If there is more than one match, then compile-time error PLS-00307 occurs, as in Example 9-34.

The initialization parameter `PLSQL_IMPLICIT_CONVERSION_BOOL` affects how overloaded subprograms with `BOOLEAN` and other type parameters are handled. If a subprogram is overloaded with `BOOLEAN` and numeric or character types, setting `PLSQL_IMPLICIT_CONVERSION_BOOL` to `TRUE` can cause compile-time errors. However, if the parameter is set to `FALSE`, the subprogram will implicitly convert arguments to the alternate type.

For example, if `PLSQL_IMPLICIT_CONVERSION_BOOL` is set to `FALSE`, the string value `'1'`, or any other non-zero numeric value represented by a string, is converted to a number by default, as in Example 9-35. If `PLSQL_IMPLICIT_CONVERSION_BOOL` is set to `TRUE`, `'1'` can be converted to either `BOOLEAN` or number, resulting in a PLS-00307 error, as in Example 9-36. This error will be encountered any time the argument supplied can be converted to either `BOOLEAN` or the alternate overloaded type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- "BOOLEAN Data Type"
- *Oracle AI Database Reference* for more information about the `PLSQL_IMPLICIT_CONVERSION_BOOL` parameter

Example 9-27 Overload Error Causes Compile-Time Error

```
CREATE OR REPLACE PACKAGE pkg1 AUTHID DEFINER IS
  PROCEDURE s (p VARCHAR2);
  PROCEDURE s (p VARCHAR2);
END pkg1;
/
```

Example 9-28 Overload Error Compiles Successfully

```
CREATE OR REPLACE PACKAGE pkg2 AUTHID DEFINER IS
  SUBTYPE t1 IS VARCHAR2(10);
  SUBTYPE t2 IS VARCHAR2(10);
  PROCEDURE s (p t1);
  PROCEDURE s (p t2);
END pkg2;
/
```

Example 9-29 Invoking Subprogram in Example 9-28 Causes Compile-Time Error

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER IS
  a pkg2.t1 := 'a';
BEGIN
  pkg2.s(a);  -- Causes compile-time error PLS-00307
END p;
/
```

Example 9-30 Correcting Overload Error in Example 9-28

```
CREATE OR REPLACE PACKAGE pkg2 AUTHID DEFINER IS
  SUBTYPE t1 IS VARCHAR2(10);
  SUBTYPE t2 IS VARCHAR2(10);
  PROCEDURE s (p1 t1);
  PROCEDURE s (p2 t2);
END pkg2;
/
```

Example 9-31 Invoking Subprogram in Example 9-30

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER IS
  a pkg2.t1 := 'a';
BEGIN
  pkg2.s(p1=>a);  -- Compiles without error
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END p;
/
```

Example 9-32 Package Specification Without Overload Errors

```
CREATE OR REPLACE PACKAGE pkg3 AUTHID DEFINER IS
  PROCEDURE s (p1 VARCHAR2);
  PROCEDURE s (p1 VARCHAR2, p2 VARCHAR2 := 'p2');
END pkg3;
/
```

Example 9-33 Improper Invocation of Properly Overloaded Subprogram

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER IS
  a1 VARCHAR2(10) := 'a1';
  a2 VARCHAR2(10) := 'a2';
BEGIN
  pkg3.s(p1=>a1, p2=>a2);  -- Compiles without error
  pkg3.s(p1=>a1);          -- Causes compile-time error PLS-00307
END p;
/
```

Example 9-34 Implicit Conversion of Parameters Causes Overload Error

```
CREATE OR REPLACE PACKAGE pack1 AUTHID DEFINER AS
  PROCEDURE proc1 (a NUMBER, b VARCHAR2);
  PROCEDURE proc1 (a NUMBER, b NUMBER);
END;
/
CREATE OR REPLACE PACKAGE BODY pack1 AS
  PROCEDURE proc1 (a NUMBER, b VARCHAR2) IS BEGIN NULL; END;
  PROCEDURE proc1 (a NUMBER, b NUMBER) IS BEGIN NULL; END;
END;
/
BEGIN
  pack1.proc1(1,'2');    -- Compiles without error
  pack1.proc1(1,2);      -- Compiles without error
  pack1.proc1('1','2');  -- Causes compile-time error PLS-00307
  pack1.proc1('1',2);    -- Causes compile-time error PLS-00307
END;
/
```

Example 9-35 Implicit Conversion to Number Successful

The successful execution of this example depends on the initialization parameter `PLSQL_IMPLICIT_CONVERSION_BOOL` being set to `FALSE`. Note that the parameter is set to `FALSE` by default.

```
ALTER SESSION SET PLSQL_IMPLICIT_CONVERSION_BOOL = FALSE;
CREATE OR REPLACE PACKAGE pkg1 AUTHID DEFINER IS
  PROCEDURE s (p INTEGER);
  PROCEDURE s (p BOOLEAN);
END pkg1;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE OR REPLACE PACKAGE BODY pkg1 IS
  PROCEDURE s (p INTEGER) AS
  BEGIN
    dbms_output.put_line ( 'Integer' );
  END;
  PROCEDURE s (p BOOLEAN) AS
  BEGIN
    dbms_output.put_line ( 'Boolean' );
  END;
END pkg1;
/

BEGIN
pkg1.s('1');  -- Compiles without error
END;
/
```

Result:

```
Integer
```

Example 9-36 Implicit Conversion to BOOLEAN or Number Causes Overload Error

This example relies on the subprogram declared in Example 9-35.

```
ALTER SESSION SET PLSQL_IMPLICIT_CONVERSION_BOOL = TRUE;

exec pkg1.s('1');  -- Causes compile-time error PLS-00307
```

Note that the same error would occur if procedure `s` accepted VARCHAR2 instead of `INTEGER` and the number `1` had been supplied to the procedure.

Recursive Subprograms

A **recursive subprogram** invokes itself. Recursion is a powerful technique for simplifying an algorithm.

A recursive subprogram must have at least two execution paths—one leading to the recursive invocation and one leading to a terminating condition. Without the latter, recursion continues until PL/SQL runs out of memory and raises the predefined exception `STORAGE_ERROR`.

In Example 9-37, the function implements the following recursive definition of *n* factorial (*n!*), the product of all integers from 1 to *n*:

```
n! = n * (n - 1)!
```

In Example 9-38, the function returns the *n*th Fibonacci number, which is the sum of the *n*-1st and *n*-2nd Fibonacci numbers. The first and second Fibonacci numbers are zero and one, respectively.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The function in Example 9-38 is a good candidate for result caching. For more information, see "Result-Cached Recursive Function".

Each recursive invocation of a subprogram creates an instance of each item that the subprogram declares and each SQL statement that it runs.

A recursive invocation inside a cursor `FOR LOOP` statement, or between an `OPEN` or `OPEN FOR` statement and a `CLOSE` statement, opens another cursor at each invocation, which might cause the number of open cursors to exceed the limit set by the database initialization parameter `OPEN_CURSORS`.

Example 9-37 Recursive Function Returns n Factorial (n!)

```
CREATE OR REPLACE FUNCTION factorial (
  n POSITIVE
) RETURN POSITIVE
  AUTHID DEFINER
IS
BEGIN
  IF n = 1 THEN                -- terminating condition
    RETURN n;
  ELSE
    RETURN n * factorial(n-1);  -- recursive invocation
  END IF;
END;
/
BEGIN
  FOR i IN 1..5 LOOP
    DBMS_OUTPUT.PUT_LINE(i || '! = ' || factorial(i));
  END LOOP;
END;
/
```

Result:

```
1! = 1
2! = 2
3! = 6
4! = 24
5! = 120
```

Example 9-38 Recursive Function Returns nth Fibonacci Number

```
CREATE OR REPLACE FUNCTION fibonacci (
  n PLS_INTEGER
) RETURN PLS_INTEGER
  AUTHID DEFINER
IS
  fib_1 PLS_INTEGER := 0;
  fib_2 PLS_INTEGER := 1;
BEGIN
  IF n = 1 THEN                              -- terminating condition
    RETURN fib_1;
  ELSIF n = 2 THEN
    RETURN fib_2;                           -- terminating condition
  ELSE
    RETURN fibonacci(n-2) + fibonacci(n-1);  -- recursive invocations
  END IF;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
BEGIN
  FOR i IN 1..10 LOOP
    DBMS_OUTPUT.PUT(fibonacci(i));
    IF i < 10 THEN
      DBMS_OUTPUT.PUT(', ');
    END IF;
  END LOOP;

  DBMS_OUTPUT.PUT_LINE(' ...');
END;
/
```

Result:

```
0, 1, 1, 2, 3, 5, 8, 13, 21, 34 ...
```

Subprogram Side Effects

A subprogram has side effects if it changes anything except the values of its own local variables. For example, a subprogram that changes any of the following has side effects:

- Its own `OUT` or `IN OUT` parameter
- A global variable
- A public variable in a package
- A database table
- The database
- The external state (by invoking `DBMS_OUTPUT` or sending e-mail, for example)

Side effects can prevent the parallelization of a query, yield order-dependent (and therefore, indeterminate) results, or require that package state be maintained across user sessions.

Minimizing side effects is especially important when defining a result-cached function or a stored function for SQL statements to invoke.

> **See Also**
>
> *Oracle Database Development Guide* for information about controlling side effects in PL/SQL functions invoked from SQL statements

PL/SQL Function Result Cache

When a PL/SQL function has the `RESULT_CACHE` option, its results are cached so sessions can reuse these results when available.

Oracle Database automatically detects all data sources (tables and views) that are queried while a result-cached function is running. If changes to any of these data sources are committed, the cached result becomes invalid across all instances. The best candidates for result-caching are functions that are invoked frequently but depend on information that changes infrequently or never.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A result object is the result of a query or result cached function execution. A temp object is the result of a query or result-cached function execution that exceeds the limit set by the multiplication of the RESULT_CACHE_MAX_SIZE by RESULT_CACHE_MAX_RESULT parameters. Temp objects are temporary segments stored in the temporary tablespace defined for the SYS user.

You can view the result and temp objects together by joining the V$RESULT_CACHE_OBJECTS using the type *Temp* for temp object and type *Result* for result objects.

```
SELECT rc1.NAME, rc2.STATUS, rc3.STATUS, rc2.BLOCK_COUNT
FROM V$RESULT_CACHE_OBJECTS rc1, V$RESULT_CACHE_OBJECTS rc2
WHERE rc1.TYPE = 'Result'
AND rc2.TYPE = 'Temp'
AND rc1.CACHE_KEY = rc2.CACHE_KEY;
```

The RESULT_CACHE_MAX_TEMP_SIZE parameter sets the maximum amount of temporary tablespace that the result cache can consume in a PDB.

The result cache usage is optimized for best performance based on changes in the application workload.

Before fetching a cached result from a remote instance, the database uses heuristics to determine if it is more cost efficient to recompute the result on the local instance.

Oracle Database tracks recently used result-cached functions. Using this history, the database only caches a result-cached function and arguments pair if it has seen it *x* times in recent history, where *x* is set by the initialization parameter RESULT_CACHE_EXECUTION_THRESHOLD. Assuming the default value of 2, the result is cached on the second execution and reused on the third execution.

You can assess the health of your result cache by running the following query. It shows the distribution of the reuse rate of cached functions. If you notice a majority of these results have a scan count of 0, consider increasing the value of the RESULT_CACHE_EXECUTION_THRESHOLD by 1 or 2.

```
SELECT SCAN_COUNT, COUNT(CACHE_KEY)
FROM V$RESULT_CACHE_OBJECTS
WHERE NAMESPACE = 'PLSQL'
GROUP BY SCAN_COUNT;
```

Topics

- Enabling Result-Caching for a Function
- Developing Applications with Result-Cached Functions
- Requirements for Result-Cached Functions
- Examples of Result-Cached Functions
- Advanced Result-Cached Function Topics

Enabling Result-Caching for a Function

To make a function result-cached, include the RESULT_CACHE clause in the function declaration and definition. For syntax details, see "Function Declaration and Definition".

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> For more information about configuring and managing the database server result cache, see *Oracle Database Reference* and *Oracle Database Performance Tuning Guide*.

In Example 9-39, the package `department_pkg` declares and then defines a result-cached function, `get_dept_info`, which returns a record of information about a given department. The function depends on the database tables `DEPARTMENTS` and `EMPLOYEES`.

You invoke the function `get_dept_info` as you invoke any function. For example, this invocation returns a record of information about department number 10:

```
department_pkg.get_dept_info(10);
```

This invocation returns only the name of department number 10:

```
department_pkg.get_dept_info(10).dept_name;
```

If the result for `get_dept_info(10)` is in the result cache, the result is returned from the cache; otherwise, the result is computed and added to the cache. Because `get_dept_info` depends on the `DEPARTMENTS` and `EMPLOYEES` tables, any committed change to `DEPARTMENTS` or `EMPLOYEES` invalidates all cached results for `get_dept_info`, relieving you of programming cache invalidation logic everywhere that `DEPARTMENTS` or `EMPLOYEES` might change.

Example 9-39 Declaring and Defining Result-Cached Function

```
CREATE OR REPLACE PACKAGE department_pkg AUTHID DEFINER IS

  TYPE dept_info_record IS RECORD (
    dept_name  departments.department_name%TYPE,
    mgr_name   employees.last_name%TYPE,
    dept_size  PLS_INTEGER
  );

  -- Function declaration

  FUNCTION get_dept_info (dept_id NUMBER)
    RETURN dept_info_record
    RESULT_CACHE;

END department_pkg;
/
CREATE OR REPLACE PACKAGE BODY department_pkg IS
  -- Function definition
  FUNCTION get_dept_info (dept_id NUMBER)
    RETURN dept_info_record
    RESULT_CACHE
  IS
    rec  dept_info_record;
  BEGIN
    SELECT department_name INTO rec.dept_name
    FROM departments
    WHERE department_id = dept_id;

    SELECT e.last_name INTO rec.mgr_name
    FROM departments d, employees e
    WHERE d.department_id = dept_id
    AND d.manager_id = e.employee_id;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    SELECT COUNT(*) INTO rec.dept_size
    FROM EMPLOYEES
    WHERE department_id = dept_id;

    RETURN rec;
  END get_dept_info;
END department_pkg;
/
```

Developing Applications with Result-Cached Functions

When developing an application that uses a result-cached function, make no assumptions about the number of times the body of the function will run for a given set of parameter values.

Some situations in which the body of a result-cached function runs are:

- The first time a session on this database instance invokes the function with these parameter values is run

  > **Note**
  >
  > `RESULT_CACHE_EXECUTION_THRESHOLD` specifies the number of times a function and a particular set of arguments must be seen until it is cached. The default value for that parameter is 2 and can be configured at the system level.

- When the cached result for these parameter values is **invalid**

  When a change to any data source on which the function depends is committed, the cached result becomes invalid

- When the cached results for these parameter values have aged out

  If the system needs memory, it might discard the oldest or rarely used cached values based on PL/SQL function history tracking

- When the `DBMS_RESULT_CACHE` block list procedure is invoked to explicitly block some result caching related objects from being cached on a local instance or globally
- After the `DBMS_RESULT_CACHE.FLUSH` has run and flushed all the cached results for SQL queries and all the cached results for PL/SQL functions
- When the function bypasses the cache (see "Result Cache Bypass")

Requirements for Result-Cached Functions

A result-cached PL/SQL function is safe if it always produces the same output for any input that it would produce were it not marked with `RESULT_CACHE`. This safety is only guaranteed if these conditions are met:

- When the function is run, it has no side effects.

  For information about side effects, see "Subprogram Side Effects".

- All tables that the function accesses are ordinary, non-`SYS`-owned permanent tables in the same database as the function.
- The function's result must be determined only by the vector of input actuals together with the committed content, at the current `SCN`, of the tables that it references.

It is recommended that a result-cached function also meet these criteria:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- It does not depend on session-specific settings.

  For more information, see "Making Result-Cached Functions Handle Session-Specific Settings".

- It does not depend on session-specific application contexts.

  For more information, see "Making Result-Cached Functions Handle Session-Specific Application Contexts".

For more information, see *Oracle Database Performance Tuning Guide*.

Examples of Result-Cached Functions

The best candidates for result-caching are functions that are invoked frequently but depend on information that changes infrequently (as might be the case in the first example). Result-caching avoids redundant computations in recursive functions.

Examples:

- Result-Cached Application Configuration Parameters
- Result-Cached Recursive Function

Result-Cached Application Configuration Parameters

Consider an application that has configuration parameters that can be set at either the global level, the application level, or the role level. The application stores the configuration information in these tables:

```
-- Global Configuration Settings
DROP TABLE global_config_params;
CREATE TABLE global_config_params
  (name  VARCHAR2(20), -- parameter NAME
   val   VARCHAR2(20), -- parameter VALUE
   PRIMARY KEY (name)
  );

-- Application-Level Configuration Settings
CREATE TABLE app_level_config_params
  (app_id  VARCHAR2(20), -- application ID
   name    VARCHAR2(20), -- parameter NAME
   val     VARCHAR2(20), -- parameter VALUE
   PRIMARY KEY (app_id, name)
  );

-- Role-Level Configuration Settings
CREATE TABLE role_level_config_params
  (role_id  VARCHAR2(20), -- application (role) ID
   name     VARCHAR2(20),  -- parameter NAME
   val      VARCHAR2(20),  -- parameter VALUE
   PRIMARY KEY (role_id, name)
  );
```

For each configuration parameter, the role-level setting overrides the application-level setting, which overrides the global setting. To determine which setting applies to a parameter, the application defines the PL/SQL function `get_value`. Given a parameter name, application ID, and role ID, `get_value` returns the setting that applies to the parameter.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The function `get_value` is a good candidate for result-caching if it is invoked frequently and if the configuration information changes infrequently.

Example 9-40 shows a possible definition for `get_value`. Suppose that for one set of parameter values, the global setting determines the result of `get_value`. While `get_value` is running, the database detects that three tables are queried—`role_level_config_params`, `app_level_config_params`, and `global_config_params`. If a change to any of these three tables is committed, the cached result for this set of parameter values is invalidated and must be recomputed.

Now suppose that, for a second set of parameter values, the role-level setting determines the result of `get_value`. While `get_value` is running, the database detects that only the `role_level_config_params` table is queried. If a change to `role_level_config_params` is committed, the cached result for the second set of parameter values is invalidated; however, committed changes to `app_level_config_params` or `global_config_params` do not affect the cached result.

Example 9-40 Result-Cached Function Returns Configuration Parameter Setting

```
CREATE OR REPLACE FUNCTION get_value
  (p_param VARCHAR2,
   p_app_id  NUMBER,
   p_role_id NUMBER
  )
  RETURN VARCHAR2
  RESULT_CACHE
  AUTHID DEFINER
IS
  answer VARCHAR2(20);
BEGIN
  -- Is parameter set at role level?
  BEGIN
    SELECT val INTO answer
      FROM role_level_config_params
        WHERE role_id = p_role_id
          AND name = p_param;
    RETURN answer;  -- Found
    EXCEPTION
      WHEN no_data_found THEN
        NULL;  -- Fall through to following code
  END;
  -- Is parameter set at application level?
  BEGIN
    SELECT val INTO answer
      FROM app_level_config_params
        WHERE app_id = p_app_id
          AND name = p_param;
    RETURN answer;  -- Found
    EXCEPTION
      WHEN no_data_found THEN
        NULL;  -- Fall through to following code
  END;
  -- Is parameter set at global level?
    SELECT val INTO answer
     FROM global_config_params
      WHERE name = p_param;
    RETURN answer;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result-Cached Recursive Function

A recursive function for finding the *n*th term of a Fibonacci series that mirrors the mathematical definition of the series might do many redundant computations. For example, to evaluate `fibonacci(7)`, the function must compute `fibonacci(6)` and `fibonacci(5)`. To compute `fibonacci(6)`, the function must compute `fibonacci(5)` and `fibonacci(4)`. Therefore, `fibonacci(5)` and several other terms are computed redundantly. Result-caching avoids these redundant computations.

> **Note**
>
> The maximum number of recursive invocations cached is 128.

```
CREATE OR REPLACE FUNCTION fibonacci (n NUMBER)
  RETURN NUMBER
  RESULT_CACHE
  AUTHID DEFINER
IS
BEGIN
  IF (n =0) OR (n =1) THEN
    RETURN 1;
  ELSE
    RETURN fibonacci(n - 1) + fibonacci(n - 2);
  END IF;
END;
/
```

Advanced Result-Cached Function Topics

Topics

- Rules for a Cache Hit
- Result Cache Bypass
- Making Result-Cached Functions Handle Session-Specific Settings
- Making Result-Cached Functions Handle Session-Specific Application Contexts
- Choosing Result-Caching Granularity
- Result Caches in Oracle RAC Environment
- Result Cache Management
- Hot-Patching PL/SQL Units on Which Result-Cached Functions Depend

Rules for a Cache Hit

Each time a result-cached function is invoked with different parameter values, those parameters and their result are stored in the cache. Subsequently, when the same function is invoked with the same parameter values (that is, when there is a **cache hit**), the result is retrieved from the cache, instead of being recomputed.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The rules for parameter comparison for a cache hit differ from the rules for the PL/SQL "equal to" (=) operator, as follows:

Category	Cache Hit Rules	"Equal To" Operator Rules
NULL comparison	`NULL` equals `NULL`	`NULL = NULL` evaluates to `NULL`.
Non-null scalar comparison	Non-null scalars are the same if and only if their values are identical; that is, if and only if their values have identical bit patterns on the given platform. For example, `CHAR` values `'AA'` and `'AA '` are different. (This rule is stricter than the rule for the "equal to" operator.)	Non-null scalars can be equal even if their values do not have identical bit patterns on the given platform; for example, `CHAR` values `'AA'` and `'AA '` are equal.

Result Cache Bypass

In some situations, the cache is bypassed. When the cache is bypassed:

- The function computes the result instead of retrieving it from the cache.
- The result that the function computes is not added to the cache.

Some examples of situations in which the cache is bypassed are:

- The cache is unavailable to all sessions.

  For example, the database administrator has disabled the use of the result cache during application patching (as in "Hot-Patching PL/SQL Units on Which Result-Cached Functions Depend").
- A session is performing a DML statement on a table or view on which a result-cached function depends.

  The session bypasses the result cache for that function until the DML statement is completed—either committed or rolled back. If the statement is rolled back, the session resumes using the cache for that function.

  Cache bypass ensures that:

  – The user of each session sees their own uncommitted changes.
  – The PL/SQL function result cache has only committed changes that are visible to all sessions, so that uncommitted changes in one session are not visible to other sessions.

Making Result-Cached Functions Handle Session-Specific Settings

If a function depends on settings that might vary from session to session (such as `NLS_DATE_FORMAT` and `TIME ZONE`), make the function result-cached only if you can modify it to handle the various settings.

The function, `get_hire_date`, in Example 8–39 uses the `TO_CHAR` function to convert a `DATE` item to a `VARCHAR` item. The function `get_hire_date` does not specify a format mask, so the format mask defaults to the one that `NLS_DATE_FORMAT` specifies. If sessions that invoke `get_hire_date` have different `NLS_DATE_FORMAT` settings, cached results can have different formats. If a cached result computed by one session ages out, and another session recomputes it, the format might vary even for the same parameter value. If a session gets a cached result whose format differs from its own format, that result is probably incorrect.

Some possible solutions to this problem are:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Change the return type of `get_hire_date` to `DATE` and have each session invoke the `TO_CHAR` function.
- If a common format is acceptable to all sessions, specify a format mask, removing the dependency on `NLS_DATE_FORMAT`. For example:

  ```
  TO_CHAR(date_hired, 'mm/dd/yy');
  ```

- Add a format mask parameter to `get_hire_date`. For example:

  ```
  CREATE OR REPLACE FUNCTION get_hire_date (emp_id NUMBER, fmt VARCHAR)
    RETURN VARCHAR
    RESULT_CACHE
    AUTHID DEFINER
  IS
    date_hired DATE;
  BEGIN
    SELECT hire_date INTO date_hired
      FROM HR.EMPLOYEES
        WHERE EMPLOYEE_ID = emp_id;
    RETURN TO_CHAR(date_hired, fmt);
  END;
  /
  ```

Example 9-41 Result-Cached Function Handles Session-Specific Settings

```
CREATE OR REPLACE FUNCTION get_hire_date (emp_id NUMBER)
  RETURN VARCHAR
  RESULT_CACHE
  AUTHID DEFINER
IS
  date_hired DATE;
BEGIN
  SELECT hire_date INTO date_hired
    FROM HR.EMPLOYEES
      WHERE EMPLOYEE_ID = emp_id;
  RETURN TO_CHAR(date_hired);
END;
/
```

Making Result-Cached Functions Handle Session-Specific Application Contexts

An **application context**, which can be either global or session-specific, is a set of attributes and their values. A PL/SQL function depends on session-specific application contexts if it does one or more of the following:

- Directly invokes the SQL function `SYS_CONTEXT`, which returns the value of a specified attribute in a specified context
- Indirectly invokes `SYS_CONTEXT` by using Virtual Private Database (VPD) mechanisms for fine-grained security

  (For information about VPD, see *Oracle Database Security Guide*.)

The PL/SQL function result-caching feature does not automatically handle dependence on session-specific application contexts. If you must cache the results of a function that depends on session-specific application contexts, you must pass the application context to the function as a parameter. You can give the parameter a default value, so that not every user must specify it.

In Example 9-42, assume that a table, `config_tab`, has a VPD policy that translates this query:

```
SELECT value FROM config_tab WHERE name = param_name;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

To this query:

```
SELECT value FROM config_tab
WHERE name = param_name
AND app_id = SYS_CONTEXT('Config', 'App_ID');
```

Example 9-42 Result-Cached Function Handles Session-Specific Application Context

```
CREATE OR REPLACE FUNCTION get_param_value (
  param_name VARCHAR,
  appctx     VARCHAR  DEFAULT SYS_CONTEXT('Config', 'App_ID')
) RETURN VARCHAR
  RESULT_CACHE
  AUTHID DEFINER
IS
  rec VARCHAR(2000);
BEGIN
  SELECT val INTO rec
  FROM config_tab
  WHERE name = param_name;

  RETURN rec;
END;
/
```

Choosing Result-Caching Granularity

PL/SQL provides the function result cache, but you choose the caching granularity. To understand the concept of granularity, consider the `Product_Descriptions` table in the Order Entry (`OE`) sample schema:

```
NAME                  NULL?      TYPE
--------------------  --------   ---------------
PRODUCT_ID            NOT NULL   NUMBER(6)
LANGUAGE_ID           NOT NULL   VARCHAR2(3)
TRANSLATED_NAME       NOT NULL   NVARCHAR2(50)
TRANSLATED_DESCRIPTION NOT NULL  NVARCHAR2(2000)
```

The table has the name and description of each product in several languages. The unique key for each row is `PRODUCT_ID`, `LANGUAGE_ID`.

Suppose that you must define a function that takes a `PRODUCT_ID` and a `LANGUAGE_ID` and returns the associated `TRANSLATED_NAME`. You also want to cache the translated names. Some of the granularity choices for caching the names are:

- One name at a time (finer granularity)
- One language at a time (coarser granularity)

Table 9-4 Finer and Coarser Caching Granularity

Granularity	Benefits
Finer	Each function result corresponds to one logical result. Stores only data that is needed at least once. Each data item ages out individually. Does not allow bulk loading optimizations.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 9-4 (Cont.) Finer and Coarser Caching Granularity

Granularity	Benefits
Coarser	Each function result contains many logical subresults. Might store data that is never used. One aged-out data item ages out the whole set. Allows bulk loading optimizations.

In Example 9-43 and Example 9-44, the function `productName` takes a `PRODUCT_ID` and a `LANGUAGE_ID` and returns the associated `TRANSLATED_NAME`. Each version of `productName` caches translated names, but at a different granularity.

In Example 9-43, `get_product_name_1` is a result-cached function. Whenever `get_product_name_1` is invoked with a different `PRODUCT_ID` and `LANGUAGE_ID`, it caches the associated `TRANSLATED_NAME`. Each invocation of `get_product_name_1` adds at most one `TRANSLATED_NAME` to the cache.

In Example 9-44, `get_product_name_2` defines a result-cached function, `all_product_names`. Whenever `get_product_name_2` invokes `all_product_names` with a different `LANGUAGE_ID`, `all_product_names` caches every `TRANSLATED_NAME` associated with that `LANGUAGE_ID`. Each invocation of `all_product_names` adds every `TRANSLATED_NAME` of at most one `LANGUAGE_ID` to the cache.

Example 9-43 Caching One Name at a Time (Finer Granularity)

```
CREATE OR REPLACE FUNCTION get_product_name_1 (
  prod_id NUMBER,
  lang_id VARCHAR2
)
  RETURN NVARCHAR2
  RESULT_CACHE
  AUTHID DEFINER
IS
  result_ VARCHAR2(50);
BEGIN
  SELECT translated_name INTO result_
  FROM OE.Product_Descriptions
  WHERE PRODUCT_ID = prod_id
  AND LANGUAGE_ID = lang_id;
  RETURN result_;
END;
/
```

Example 9-44 Caching Translated Names One Language at a Time (Coarser Granularity)

```
CREATE OR REPLACE FUNCTION get_product_name_2 (
  prod_id NUMBER,
  lang_id VARCHAR2
)
  RETURN NVARCHAR2
  AUTHID DEFINER
IS
  TYPE product_names IS TABLE OF NVARCHAR2(50) INDEX BY PLS_INTEGER;

  FUNCTION all_product_names (lang_id VARCHAR2)
    RETURN product_names
    RESULT_CACHE
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  IS
    all_names product_names;
  BEGIN
    FOR c IN (SELECT * FROM OE.Product_Descriptions
              WHERE LANGUAGE_ID = lang_id) LOOP
      all_names(c.PRODUCT_ID) := c.TRANSLATED_NAME;
    END LOOP;
    RETURN all_names;
  END;
BEGIN
  RETURN all_product_names(lang_id)(prod_id);
END;
/
```

Result Caches in Oracle RAC Environment

Cached results are stored in the system global area (SGA). In an Oracle RAC environment, each database instance manages its own local function result cache. However, the contents of the local result cache are accessible to sessions attached to other Oracle RAC instances. If a required result is missing from the result cache of the local instance, the result might be retrieved from the local cache of another instance, instead of being locally computed. The access pattern and workload of an instance determine the set of results in its local cache; therefore, the local caches of different instances can have different sets of results.

Before fetching a cached result from a remote instance, the database uses heuristics to determine if it is more cost efficient to recompute the result on the local instance. You can monitor the use of this functionality by querying the `V$RESULT_CACHE_OBJECTS` and `V$RESULT_CACHE_STATISTICS` views. The `V$RESULT_CACHE_OBJECTS` has a value 'Yes' in the `GLOBAL` column if the object has been fetched from the result cache of another instance. A value of 'No' means that the result was locally recomputed, either because it was not available remotely, or because the system has decided it is more efficient to do so instead of fetching it remotely. The statistics `'Global Prune Count'` in the `V$RESULT_CACHE_STATISTICS` view shows the number of times the decision was made not to fetch from a remote instance. `'Global Prune By Self Count'` shows the number of times an instance asked to provide a local result and has decided it is more efficient for the requesting instance to compute the result locally. Finally, `'Global Load Rate'` shows the computed rate - in bytes per 10 milliseconds - of fetching results from result cache of other instances. All these statistics only apply to global result caches in a RAC environment.

Although each database instance might have its own set of cached results, the mechanisms for handling invalid results are Oracle RAC environment-wide. For example, consider a result cache of item prices that are computed from data in database tables. If any of these database tables is updated in a way that affects the price of an item, the cached price of that item is invalidated in every database instance in the Oracle RAC environment.

> **See Also**
>
> *Real Application Clusters Administration and Deployment Guide* for more information about setting `RESULT_CACHE_MAX_SIZE` parameter and other initialization parameters in an Oracle RAC database

Result Cache Management

The PL/SQL function result cache shares its administrative and manageability infrastructure with the Result Cache.

Copyright © 1996, 2025, Oracle and/or its affiliates.

You can administer the shared pool area part that is used by the SQL result cache and the PL/SQL function result cache using the `DBMS_RESULT_CACHE` subprograms. Using the `DBMS_RESULT_CACHE.BLACKLIST_ADD` procedure, you can add a query or a PL/SQL function to a blocklist to stop caching the results. No matter the bind variables or arguments used, there will be no objects generated for it. The result cache row source may still appear in the explain plan, but at runtime it will be a no-op. You can solve a result cache issue if you diagnose by looking for a case when ten of thousands set of cached results unique arguments is run for a function. Depending on the workload, the overhead of managing these cached results might offset the benefits of caching the results. The performance views gives you insight on this special cases.

You can run a query to identify problematic queries or functions. The `cache_id` is the result cache identifier of a SQL cursor or PL/SQL function. This query counts how many unique result cache objects were made for each cache id. A unique object is created for every run of a query or function with unique bind variables or arguments.

```
SELECT cache_id, COUNT(cache_key) AS uniq_args
FROM GV$RESULT_CACHE_OBJECTS
WHERE type = 'Result'
GROUP BY cache_id
ORDER BY uniq_args DESC;
```

When a dependent object is frequently updated by a workload, it can adversely impact the performance benefits of using result cache. For example, when a large transaction is committed and is affecting already cached results, messages are sent to invalidate these cached results to prevent wrong results. The first hint that this bottleneck is happening is the observation of high waits with `CHANNEL = 'Result Cache: Channel'` in the `GV$CHANNEL_WAITS` view. You can run a query to check the culprit and take appropriate action such as adding the object to the blocklist. An object with an extremely high number of invalidations can be diagnosed using this query.

```
SELECT object_no, SUM(invalidations) AS num_invals
FROM GV$RESULT_CACHE_OBJECTS
WHERE type = 'Dependency'
GROUP BY object_no
ORDER BY num_invals DESC;
```

See Also

- *Oracle Database PL/SQL Packages and Types Reference* for more information about the `DBMS_RESULT_CACHE` package

Dynamic performance views provide information to monitor the server and client result caches.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - *Oracle Database Performance Tuning Guide* for more information about configuring the result cache
> - *Oracle Database Reference* for more information about `V$RESULT_CACHE_STATISTICS`
> - *Oracle Database Reference* for more information about `V$RESULT_CACHE_MEMORY`
> - *Oracle Database Reference* for more information about `V$RESULT_CACHE_OBJECTS`
> - *Oracle Database Reference* for more information about `V$RESULT_CACHE_DEPENDENCY`

The database administrator manages the server result cache by specifying the result cache initialization parameters.

> **See Also**
>
> - *Oracle Database Concepts* for more information about the Server Result Cache Infrastructure

Hot-Patching PL/SQL Units on Which Result-Cached Functions Depend

When you hot-patch a PL/SQL unit on which a result-cached function depends (directly or indirectly), the cached results associated with the result-cached function might not be automatically flushed in all cases.

For example, suppose that the result-cached function `P1.foo()` depends on the package subprogram `P2.bar()`. If a new version of the body of package `P2` is loaded, the cached results associated with `P1.foo()` are not automatically flushed.

Therefore, this is the recommended procedure for hot-patching a PL/SQL unit:

> **Note**
>
> To follow these steps, you must have the `EXECUTE` privilege on the package `DBMS_RESULT_CACHE`.

1. Put the result cache in bypass mode and flush existing results:

   ```
   BEGIN
     DBMS_RESULT_CACHE.Bypass(TRUE);
     DBMS_RESULT_CACHE.Flush;
   END;
   /
   ```

   In an Oracle RAC environment, perform this step for each database instance.
2. Patch the PL/SQL code.
3. Resume using the result cache:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  DBMS_RESULT_CACHE.Bypass(FALSE);
END;
/
```

In an Oracle RAC environment, perform this step for each database instance.

PL/SQL Functions that SQL Statements Can Invoke

To be invocable from SQL statements, a stored function (and any subprograms that it invokes) must obey the following purity rules, which are meant to control side effects:

- When invoked from a `SELECT` statement or a parallelized `INSERT`, `UPDATE`, `DELETE`, or `MERGE` statement, the subprogram cannot modify any database tables.
- When invoked from an `INSERT`, `UPDATE`, `DELETE`, or `MERGE` statement, the subprogram cannot query or modify any database tables modified by that statement.

  If a function either queries or modifies a table, and a DML statement on that table invokes the function, then ORA-04091 (mutating-table error) occurs. There is one exception: ORA-04091 does not occur if a single-row `INSERT` statement that is not in a `FORALL` statement invokes the function in a `VALUES` clause.
- When invoked from a `SELECT`, `INSERT`, `UPDATE`, `DELETE`, or `MERGE` statement, the subprogram cannot run any of the following SQL statements (unless `PRAGMA AUTONOMOUS_TRANSACTION` was specified):
  - Transaction control statements (such as `COMMIT`)
  - Session control statements (such as `SET ROLE`)
  - System control statements (such as `ALTER SYSTEM`)
  - Database definition language (DDL) statements (such as `CREATE`), which are committed automatically

  (For the description of `PRAGMA AUTONOMOUS_TRANSACTION`, see "AUTONOMOUS_TRANSACTION Pragma".)

If any SQL statement in the execution part of the function violates a rule, then a runtime error occurs when that statement is parsed.

The fewer side effects a function has, the better it can be optimized in a `SELECT` statement, especially if the function is declared with the option `DETERMINISTIC` or `PARALLEL_ENABLE` (for descriptions of these options, see "DETERMINISTIC Clause" and "PARALLEL_ENABLE Clause").

See Also

- *Oracle Database Development Guide* for information about restrictions on PL/SQL functions that SQL statements can invoke
- "Tune Function Invocations in Queries"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Invoker's Rights and Definer's Rights (AUTHID Property)

The AUTHID property of a stored PL/SQL unit affects the name resolution and privilege checking of SQL statements that the unit issues at run time. The AUTHID property does not affect compilation, and has no meaning for units that have no code, such as collection types.

AUTHID property values are exposed in the static data dictionary view *_PROCEDURES. For units for which AUTHID has meaning, the view shows the value CURRENT_USER or DEFINER; for other units, the view shows NULL.

For stored PL/SQL units that you create or alter with the following statements, you can use the optional AUTHID clause to specify either DEFINER (the default, for backward compatibility) or CURRENT_USER (the preferred usage):

- "CREATE FUNCTION Statement"
- "CREATE PACKAGE Statement"
- "CREATE PROCEDURE Statement"
- "CREATE TYPE Statement"
- "ALTER TYPE Statement"

A unit whose AUTHID value is CURRENT_USER is called an **invoker's rights unit**, or **IR unit**. A unit whose AUTHID value is DEFINER (the default) is called a **definer's rights unit**, or **DR unit**. PL/SQL units and schema objects for which you cannot specify an AUTHID value behave like this:

PL/SQL Unit or Schema Object	Behavior
Anonymous block	IR unit
BEQUEATH CURRENT_USER view	Somewhat like an IR unit—see *Oracle Database Security Guide*.
BEQUEATH DEFINER view	DR unit
Trigger	DR unit

The AUTHID property of a unit determines whether the unit is IR or DR, and it affects both name resolution and privilege checking at run time:

- The context for name resolution is CURRENT_SCHEMA.
- The privileges checked are those of the CURRENT_USER and the enabled roles.

When a session starts, CURRENT_SCHEMA has the value of the schema owned by SESSION_USER, and CURRENT_USER has the same value as SESSION_USER. (To get the current value of CURRENT_SCHEMA, CURRENT_USER, or SESSION_USER, use the SYS_CONTEXT function, documented in *Oracle Database SQL Language Reference*.)

CURRENT_SCHEMA can be changed during the session with the SQL statement ALTER SESSION SET CURRENT_SCHEMA. CURRENT_USER cannot be changed programmatically, but it might change when a PL/SQL unit or a view is pushed onto, or popped from, the call stack.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Oracle recommends against issuing `ALTER SESSION SET CURRENT_SCHEMA` from in a stored PL/SQL unit.

During a server call, when a DR unit is pushed onto the call stack, the database stores the currently enabled roles and the current values of `CURRENT_USER` and `CURRENT_SCHEMA`. It then changes both `CURRENT_USER` and `CURRENT_SCHEMA` to the owner of the DR unit, and enables only the role `PUBLIC`. (The stored and new roles and values are not necessarily different.) When the DR unit is popped from the call stack, the database restores the stored roles and values. In contrast, when an IR unit is pushed onto, or popped from, the call stack, the values of `CURRENT_USER` and `CURRENT_SCHEMA`, and the currently enabled roles do not change (unless roles are granted to the IR unit itself—see "Granting Roles to PL/SQL Packages and Standalone Subprograms").

For dynamic SQL statements issued by a PL/SQL unit, name resolution and privilege checking are done once, at run time. For static SQL statements, name resolution and privilege checking are done twice: first, when the PL/SQL unit is compiled, and then again at run time. At compile time, the `AUTHID` property has no effect—both DR and IR units are treated like DR units. At run time, however, the `AUTHID` property determines whether a unit is IR or DR, and the unit is treated accordingly.

Upon entry into an IR unit, the runtime system checks privileges before doing any initialization or running any code. If the unit owner has neither the `INHERIT PRIVILEGES` privilege on the invoker nor the `INHERIT ANY PRIVILEGES` privilege, then the runtime system raises error ORA-06598.

> **Note**
>
> If the unit owner has the required privilege, then one of these statements granted it:
>
> ```
> GRANT INHERIT PRIVILEGES ON current_user TO PUBLIC
> GRANT INHERIT PRIVILEGES ON current_user TO unit_owner
> GRANT INHERIT ANY PRIVILEGES TO unit_owner
> ```
>
> For information about the `GRANT` statement, see *Oracle Database SQL Language Reference*.

> **See Also**
>
> - *Oracle Database Security Guide* for information about managing security for DR and IR units
> - Oracle Database Security Guide for information about capturing privileges that are required to compile DR and IR program units

Topics

- Granting Roles to PL/SQL Packages and Standalone Subprograms
- IR Units Need Template Objects

Copyright © 1996, 2025, Oracle and/or its affiliates.

Granting Roles to PL/SQL Packages and Standalone Subprograms

Using the SQL `GRANT` command, you can grant roles to PL/SQL packages and standalone subprograms. Roles granted to a PL/SQL unit do not affect compilation. They affect the privilege checking of SQL statements that the unit issues at run time: The unit runs with the privileges of both its own roles and any other currently enabled roles.

Typically, you grant roles to an IR unit, so that users with lower privileges than yours can run the unit with only the privileges needed to do so. You grant roles to a DR unit (whose invokers run it with all your privileges) only if the DR unit issues dynamic SQL, which is checked only at run time.

The basic syntax for granting roles to PL/SQL units is:

```
GRANT role [, role ]... TO unit [, unit ]...
```

For example, this command grants the roles `read` and `execute` to the function `scott.func` and the package `sys.pkg`:

```
GRANT read, execute TO FUNCTION scott.func, PACKAGE sys.pkg
```

For the complete syntax and semantics of the `GRANT` command, see *Oracle Database SQL Language Reference*.

See Also

- *Oracle Database SQL Language Reference* for information about the `REVOKE` command, which lets you revoke roles from PL/SQL units
- *Oracle Database Security Guide* for more information about configuring application users and application roles

IR Units Need Template Objects

One user (that is, one schema) owns an IR unit and other users run it in their schemas. If the IR unit issues static SQL statements, then the schema objects that these statements affect must exist in the owner's schema at compile time (so that the compiler can resolve references) and in the invoker's schema at run time. The definitions of corresponding schema objects must match (for example, corresponding tables must have the same names and columns); otherwise, you get an error or unexpected results. However, the objects in the owner's schema need not contain data, because the compiler does not need it; therefore, they are called **template objects**.

Connected User Database Links in DR Units

If you include a connected user database link in a DR unit (definer's rights unit), then you must grant the user who will run the DR unit the `INHERIT REMOTE PRIVILEGES` privilege.

Granting the user this privilege enables the user to run the DR unit; otherwise, the execution will fail with an `ORA-25433: User  does not have INHERIT REMOTE PRIVILEGES` error. To include a connected user database link from within a definer's rights (DR) procedure, include *`@database_link`* in the procedure.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The following example shows how a DR unit can use a database link called `dblink` to access the `EMPLOYEE_ID` column of the `HR.EMPLOYEES` table:

Example 9-45 Database Link in a DR Unit

```
CREATE OR REPLACE PROCEDURE hr_remote_db_link
AS
v_employee_id VARCHAR(50);
BEGIN
    EXECUTE IMMEDIATE 'SELECT employee_id FROM employees@dblink' into v_employee_id;
    DBMS_OUTPUT.PUT_LINE('employee_id: ' || v_employee_id);
END ;
/
```

> **See Also**
>
> *Oracle AI Database Security Guide* for more information about using the `INHERIT REMOTE PRIVILEGES` privilege, including a tutorial on how a DR unit can use a database link

External Subprograms

If a C procedure, Java method, or JavaScript function is stored in the database, you can publish it as an external subprogram and then invoke it from PL/SQL.

To publish an external subprogram, define a stored PL/SQL subprogram with a call specification. The call specification maps the name, parameter types, and return type of the external subprogram to PL/SQL equivalents. Invoke the published external subprogram by its PL/SQL name.

For example, suppose that this Java class, `Adjuster`, is stored in the database:

```
import java.sql.*;
import oracle.jdbc.driver.*;
public class Adjuster {
  public static void raiseSalary (int empNo, float percent)
  throws SQLException {
    Connection conn = new OracleDriver().defaultConnection();
    String sql = "UPDATE employees SET salary = salary * ?
                  WHERE employee_id = ?";
    try {
      PreparedStatement pstmt = conn.prepareStatement(sql);
      pstmt.setFloat(1, (1 + percent / 100));
      pstmt.setInt(2, empNo);
      pstmt.executeUpdate();
      pstmt.close();
    } catch (SQLException e)
         {System.err.println(e.getMessage());}
    }
}
```

The Java class `Adjuster` has one method, `raiseSalary`, which raises the salary of a specified employee by a specified percentage. Because `raiseSalary` is a `void` method, you publish it as a PL/SQL procedure (rather than a function).

Example 9-46 publishes the stored Java method `Adjuster.raiseSalary` as a PL/SQL standalone procedure, mapping the Java method name `Adjuster.raiseSalary` to the PL/SQL

Copyright © 1996, 2025, Oracle and/or its affiliates.

procedure name `raise_salary` and the Java data types `int` and `float` to the PL/SQL data type `NUMBER`. Then the anonymous block invokes `raise_salary`.

Example 9-47 publishes the stored Java method `java.lang.Thread.sleep` as a PL/SQL standalone procedure, mapping the Java method name to the PL/SQL procedure name `java_sleep` and the Java data type `long` to the PL/SQL data type `NUMBER`. The PL/SQL standalone procedure `sleep` invokes `java_sleep`.

Example 9-48 implements the functionality of the Java adjuster example in JavaScript. The JavaScript function `raiseSal` is mapped to the PL/SQL procedure `js_raise_sal`, which is then invoked using an anonymous PL/SQL block.

See Also

- *Oracle Database Development Guide* for more information about calling external programs
- *Oracle AI Database JavaScript Developer's Guide* for information about using call specifications to publish JavaScript functions

Example 9-46 PL/SQL Anonymous Block Invokes External Procedure

```
-- Publish Adjuster.raiseSalary as standalone PL/SQL procedure:

CREATE OR REPLACE PROCEDURE raise_salary (
  empid NUMBER,
  pct   NUMBER
) AS
  LANGUAGE JAVA NAME 'Adjuster.raiseSalary (int, float)';  -- call
specification
/

BEGIN
  raise_salary(120, 10);  -- invoke Adjuster.raiseSalary by PL/SQL name
END;
/
```

Example 9-47 PL/SQL Standalone Procedure Invokes External Procedure

```
-- Java call specification:

CREATE PROCEDURE java_sleep (
  milli_seconds IN NUMBER
) AS LANGUAGE JAVA NAME 'java.lang.Thread.sleep(long)';
/

CREATE OR REPLACE PROCEDURE sleep (
  milli_seconds IN NUMBER
) AUTHID DEFINER IS
BEGIN
  DBMS_OUTPUT.PUT_LINE(DBMS_UTILITY.get_time());
  java_sleep (milli_seconds);
  DBMS_OUTPUT.PUT_LINE(DBMS_UTILITY.get_time());
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Example 9-48 Implement JavaScript External Procedure

```
CREATE OR REPLACE MLE MODULE js_adjuster LANGUAGE JAVASCRIPT AS

import oracledb from "mle-js-oracledb";

/**
* Give an employee a raise
* @param {number} empNo - ID of the employee to give a raise
* @param {number} percent - the raise in percent (0 - 100)
* @returns {number} the new salary
*/

export function raiseSal(empNo, percent) {
  if (empNo === undefined || percent === undefined) {
    throw "provide the employee ID and the raise percentage";
  }

  if(percent < 0 || percent > 100){
    throw new Error("raise must be greater than 0 and less than 100");
  }

  const result = session.execute(
    `UPDATE hr.employees
       SET salary = salary * (1 + (:percent / 100))
     WHERE employee_id = :empNo
     RETURNING new salary into :newSal`,
    {
      percent: {
        type: oracledb.NUMBER,
        val: percent,
        dir: oracledb.BIND_IN,
      },
      empNo: {
        type: oracledb.NUMBER,
        val: empNo,
        dir: oracledb.BIND_IN,
      },
      newSal: {
        type: oracledb.NUMBER,
        dir: oracledb.BIND_OUT,
      },
    },
  );

  //report an error in case the update did not affect any rows
  if(result.rowsAffected !== 1){
    throw new Error(`error updating the salary for employee ${empNo}`);
  }

  //outBinds contain the new salary returned by the RETURNING clause
  //the first element indicates the first new salary (there is only 1)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  return result.outBinds.newSal[0];
}
/
```

The following call specification publishes the JavaScript function `raiseSal` as a standalone PL/SQL function.

```
CREATE OR REPLACE FUNCTION js_raise_sal(
  p_empno NUMBER,
  p_percent NUMBER
) RETURN NUMBER
AS MLE MODULE js_adjuster
SIGNATURE 'raiseSal';
/
```

The PL/SQL procedure `js_raise_sal` is invoked by the following anonymous block.

```
SET SERVEROUTPUT ON;
DECLARE
  l_new_sal NUMBER;
  l_old_sal NUMBER;
  l_empNo NUMBER := 100;
BEGIN
  SELECT salary
  INTO l_old_sal
  FROM hr.employees
  WHERE employee_id = l_empNo;

DBMS_OUTPUT.PUT_LINE('Current salary for employee ' || l_empNo
                          || ' amounts to ' || l_old_sal);

l_new_sal := js_raise_sal(
  p_empno => l_empNo,
  p_percent => 10
);

DBMS_OUTPUT.PUT_LINE('New salary for employee ' || l_empNo
                          || ' increased to ' || l_new_sal);
END;
/
```

Result:

```
Current salary for employee 100 amounts to 24000
New salary for employee 100 increased to 26400
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

10

PL/SQL Triggers

A trigger is like a stored procedure that Oracle Database invokes automatically whenever a specified event occurs.

> **Note**
>
> The database can detect only system-defined events. You cannot define your own events.

Topics

- Overview of Triggers
- Reasons to Use Triggers
- DML Triggers
- Correlation Names and Pseudorecords
- System Triggers
- Subprograms Invoked by Triggers
- Trigger Compilation, Invalidation, and Recompilation
- Exception Handling in Triggers
- Trigger Design Guidelines
- Trigger Restrictions
- Order in Which Triggers Fire
- Trigger Enabling and Disabling
- Trigger Changing and Debugging
- Triggers and Oracle Database Data Transfer Utilities
- Triggers for Publishing Events
- Views for Information About Triggers

Overview of Triggers

Like a stored procedure, a trigger is a named PL/SQL unit that is stored in the database and can be invoked repeatedly. Unlike a stored procedure, you can enable and disable a trigger, but you cannot explicitly invoke it.

While a trigger is **enabled**, the database automatically invokes it—that is, the trigger **fires**—whenever its triggering event occurs. While a trigger is **disabled**, it does not fire.

You create a trigger with the `CREATE TRIGGER` statement. You specify the **triggering event** in terms of **triggering statements** and the item on which they act. The trigger is said to be **created on** or **defined on** the item, which is either a table, a view, a schema, or the database.

Copyright © 1996, 2025, Oracle and/or its affiliates.

You also specify the **timing point**, which determines whether the trigger fires before or after the triggering statement runs and whether it fires for each row that the triggering statement affects. By default, a trigger is created in the enabled state.

If the trigger is created on a table or view, then the triggering event is composed of DML statements, and the trigger is called a **DML trigger**.

A **crossedition trigger** is a DML trigger for use only in edition-based redefinition.

If the trigger is created on a schema or the database, then the triggering event is composed of either DDL or database operation statements, and the trigger is called a **system trigger**.

A **conditional trigger** is a DML or system trigger that has a `WHEN` clause that specifies a SQL condition that the database evaluates for each row that the triggering statement affects.

When a trigger fires, tables that the trigger references might be undergoing changes made by SQL statements in other users' transactions. SQL statements running in triggers follow the same rules that standalone SQL statements do. Specifically:

- Queries in the trigger see the current read-consistent materialized view of referenced tables and any data changed in the same transaction.
- Updates in the trigger wait for existing data locks to be released before proceeding.

An **`INSTEAD OF` trigger** is either:

- A DML trigger created on either a noneditioning view or a nested table column of a noneditioning view
- A system trigger defined on a `CREATE` statement

The database fires the `INSTEAD OF` trigger instead of running the triggering statement.

> **Note**
>
> A trigger is often called by the name of its triggering statement (for example, *`DELETE` trigger* or *`LOGON` trigger*), the name of the item on which it is defined (for example, *`DATABASE` trigger* or *`SCHEMA` trigger*), or its timing point (for example, *`BEFORE` statement trigger* or *`AFTER` each row trigger*).

> **See Also**
>
> - "CREATE TRIGGER Statement" syntax diagram
> - "DML Triggers"
> - "System Triggers"
> - *Oracle Database Development Guide* for information about crossedition triggers
> - "CREATE TRIGGER Statement" for information about the `WHEN` clause

Reasons to Use Triggers

Triggers let you customize your database management system.

For example, you can use triggers to:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Automatically generate virtual column values
- Log events
- Gather statistics on table access
- Modify table data when DML statements are issued against views
- Enforce referential integrity when child and parent tables are on different nodes of a distributed database
- Publish information about database events, user events, and SQL statements to subscribing applications
- Prevent DML operations on a table after regular business hours
- Prevent invalid transactions
- Enforce complex business or referential integrity rules that you cannot define with constraints (see "How Triggers and Constraints Differ")

> **⚠ Caution**
>
> Triggers are not reliable security mechanisms, because they are programmatic and easy to disable. For high-assurance security, use Oracle Database Vault, described in *Oracle Database Vault Administrator's Guide*.

How Triggers and Constraints Differ

Both triggers and constraints can constrain data input, but they differ significantly.

A trigger always applies to new data only. For example, a trigger can prevent a DML statement from inserting a `NULL` value into a database column, but the column might contain `NULL` values that were inserted into the column before the trigger was defined or while the trigger was disabled.

A constraint can apply either to new data only (like a trigger) or to both new and existing data. Constraint behavior depends on constraint state, as explained in *Oracle Database SQL Language Reference*.

Constraints are easier to write and less error-prone than triggers that enforce the same rules. However, triggers can enforce some complex business rules that constraints cannot. Oracle strongly recommends that you use triggers to constrain data input only in these situations:

- To enforce referential integrity when child and parent tables are on different nodes of a distributed database
- To enforce complex business or referential integrity rules that you cannot define with constraints

> **ⓘ See Also**
>
> - *Oracle Database Development Guide* for information about using constraints to enforce business rules and prevent the entry of invalid information into tables
> - "Triggers for Ensuring Referential Integrity" for information about using triggers and constraints to maintain referential integrity between parent and child tables

Copyright © 1996, 2025, Oracle and/or its affiliates.

DML Triggers

A **DML trigger** is created on either a table or view, and its triggering event is composed of the DML statements `DELETE`, `INSERT`, and `UPDATE`.

To create a trigger that fires in response to a `MERGE` statement, create triggers on the `INSERT` and `UPDATE` statements to which the `MERGE` operation decomposes.

A DML trigger is either simple or compound.

A **simple DML trigger** fires at exactly one of these timing points:

- Before the triggering statement runs

  (The trigger is called a *`BEFORE` statement trigger* or *statement-level `BEFORE` trigger.*)
- After the triggering statement runs

  (The trigger is called an *`AFTER` statement trigger* or *statement-level `AFTER` trigger.*)
- Before each row that the triggering statement affects

  (The trigger is called a *`BEFORE` each row trigger* or *row-level `BEFORE` trigger.*)
- After each row that the triggering statement affects

  (The trigger is called an *`AFTER` each row trigger* or *row-level `AFTER` trigger.*)

When a trigger is created on an `INSERT` statement with `FORALL`, the inserts are treated as a single operation. This means that all statement level triggers fire only once, not for each insert. When a trigger is created on an `UPDATE` or `DELETE` statement with `FORALL`, the trigger is executed for each DML statement. This results in better performance for insert operations.

A **compound DML trigger** created on a table or editioning view can fire at one, some, or all of the preceding timing points. Compound DML triggers help program an approach where you want the actions that you implement for the various timing points to share common data.

A simple or compound DML trigger that fires at row level can access the data in the row that it is processing. For details, see "Correlation Names and Pseudorecords".

An **`INSTEAD OF` DML trigger** is a DML trigger created on either a noneditioning view or a nested table column of a noneditioning view.

Except in an `INSTEAD OF` trigger, a triggering `UPDATE` statement can include a column list. With a column list, the trigger fires only when a specified column is updated. Without a column list, the trigger fires when any column of the associated table is updated.

Topics

- Conditional Predicates for Detecting Triggering DML Statement
- INSTEAD OF DML Triggers
- Compound DML Triggers
- Triggers for Ensuring Referential Integrity
- FORALL Statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

Conditional Predicates for Detecting Triggering DML Statement

The triggering event of a DML trigger can be composed of multiple triggering statements. When one of them fires the trigger, the trigger can determine which one by using these **conditional predicates**.

Table 10-1 Conditional Predicates

Conditional Predicate	TRUE if and only if:
`INSERTING`	An `INSERT` statement fired the trigger.
`UPDATING`	An `UPDATE` statement fired the trigger.
`UPDATING ('column')`	An `UPDATE` statement that affected the specified column fired the trigger.
`DELETING`	A `DELETE` statement fired the trigger.

A conditional predicate can appear wherever a `BOOLEAN` expression can appear.

Example 10-1 Trigger Uses Conditional Predicates to Detect Triggering Statement

This example creates a DML trigger that uses conditional predicates to determine which of its four possible triggering statements fired it.

```
CREATE OR REPLACE TRIGGER t
  BEFORE
    INSERT OR
    UPDATE OF salary, department_id OR
    DELETE
  ON employees
BEGIN
  CASE
    WHEN INSERTING THEN
      DBMS_OUTPUT.PUT_LINE('Inserting');
    WHEN UPDATING('salary') THEN
      DBMS_OUTPUT.PUT_LINE('Updating salary');
    WHEN UPDATING('department_id') THEN
      DBMS_OUTPUT.PUT_LINE('Updating department ID');
    WHEN DELETING THEN
      DBMS_OUTPUT.PUT_LINE('Deleting');
  END CASE;
END;
/
```

INSTEAD OF DML Triggers

An `INSTEAD OF DML` **trigger** is a DML trigger created on a noneditioning view, or on a nested table column of a noneditioning view. The database fires the `INSTEAD OF` trigger instead of running the triggering DML statement.

An `INSTEAD OF` trigger cannot be conditional.

An `INSTEAD OF` trigger is the only way to update a view that is not inherently updatable. Design the `INSTEAD OF` trigger to determine what operation was intended and do the appropriate DML operations on the underlying tables.

An `INSTEAD OF` trigger is always a row-level trigger. An `INSTEAD OF` trigger can read `OLD` and `NEW` values, but cannot change them.

Copyright © 1996, 2025, Oracle and/or its affiliates.

An INSTEAD OF trigger with the NESTED TABLE clause fires only if the triggering statement operates on the elements of the specified nested table column of the view. The trigger fires for each modified nested table element.

> **See Also**
>
> - *Oracle Database SQL Language Reference* for information about inherently updatable views
> - "Compound DML Trigger Structure" for information about compound DML triggers with the INSTEAD OF EACH ROW section

Example 10-2 INSTEAD OF Trigger

This example creates the view oe.order_info to display information about customers and their orders. The view is not inherently updatable (because the primary key of the orders table, order_id, is not unique in the result set of the join view). The example creates an INSTEAD OF trigger to process INSERT statements directed to the view. The trigger inserts rows into the base tables of the view, customers and orders.

```
CREATE OR REPLACE VIEW order_info AS
   SELECT c.customer_id, c.cust_last_name, c.cust_first_name,
          o.order_id, o.order_date, o.order_status
   FROM customers c, orders o
   WHERE c.customer_id = o.customer_id;

CREATE OR REPLACE TRIGGER order_info_insert
   INSTEAD OF INSERT ON order_info
   DECLARE
     duplicate_info EXCEPTION;
     PRAGMA EXCEPTION_INIT (duplicate_info, -00001);
   BEGIN
     INSERT INTO customers
       (customer_id, cust_last_name, cust_first_name)
     VALUES (
     :new.customer_id,
     :new.cust_last_name,
     :new.cust_first_name);
   INSERT INTO orders (order_id, order_date, customer_id)
   VALUES (
     :new.order_id,
     :new.order_date,
     :new.customer_id);
   EXCEPTION
     WHEN duplicate_info THEN
       RAISE_APPLICATION_ERROR (
         num=> -20107,
         msg=> 'Duplicate customer or order ID');
   END order_info_insert;
/
```

Query to show that row to be inserted does not exist:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
SELECT COUNT(*) FROM order_info WHERE customer_id = 999;
```

Result:

```
  COUNT(*)
----------
         0

1 row selected.
```

Insert row into view:

```
INSERT INTO order_info VALUES
   (999, 'Smith', 'John', 2500, TO_DATE('13-MAR-2001', 'DD-MON-YYYY'), 0);
```

Result:

```
1 row created.
```

Query to show that row has been inserted in view:

```
SELECT COUNT(*) FROM order_info WHERE customer_id = 999;
```

Result:

```
  COUNT(*)
----------
         1

1 row selected.
```

Query to show that row has been inserted in `customers` table:

```
SELECT COUNT(*) FROM customers WHERE customer_id = 999;
```

Result:

```
  COUNT(*)
----------
         1

1 row selected.
```

Query to show that row has been inserted in `orders` table:

```
SELECT COUNT(*) FROM orders WHERE customer_id = 999;
```

Result:

```
  COUNT(*)
----------
         1

1 row selected.
```

Example 10-3 INSTEAD OF Trigger on Nested Table Column of View

In this example, the view `dept_view` contains a nested table of employees, `emplist`, created by the `CAST` function (described in *Oracle Database SQL Language Reference*). To modify the `emplist` column, the example creates an `INSTEAD OF` trigger on the column.

```
-- Create type of nested table element:
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE OR REPLACE TYPE nte
AUTHID DEFINER IS
OBJECT (
  emp_id     NUMBER(6),
  lastname   VARCHAR2(25),
  job        VARCHAR2(10),
  sal        NUMBER(8,2)
);
/

-- Created type of nested table:

CREATE OR REPLACE TYPE emp_list_ IS
  TABLE OF nte;
/

-- Create view:

CREATE OR REPLACE VIEW dept_view AS
  SELECT d.department_id,
         d.department_name,
         CAST (MULTISET (SELECT e.employee_id, e.last_name, e.job_id, e.salary
                         FROM employees e
                         WHERE e.department_id = d.department_id
                        )
                        AS emp_list_
               ) emplist
  FROM departments d;

-- Create trigger:

CREATE OR REPLACE TRIGGER dept_emplist_tr
  INSTEAD OF INSERT ON NESTED TABLE emplist OF dept_view
  REFERENCING NEW AS Employee
              PARENT AS Department
  FOR EACH ROW
BEGIN
  -- Insert on nested table translates to insert on base table:
  INSERT INTO employees (
    employee_id,
    last_name,
    email,
    hire_date,
    job_id,
    salary,
    department_id
  )
  VALUES (
    :Employee.emp_id,                       -- employee_id
    :Employee.lastname,                     -- last_name
    :Employee.lastname || '@example.com',   -- email
    SYSDATE,                                -- hire_date
    :Employee.job,                          -- job_id
    :Employee.sal,                          -- salary
    :Department.department_id               -- department_id
  );
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Query view before inserting row into nested table:

```
SELECT emplist FROM dept_view WHERE department_id=10;
```

Result:

```
EMPLIST(EMP_ID, LASTNAME, JOB, SAL)
-------------------------------------------

EMP_LIST_(NTE(200, 'Whalen', 'AD_ASST', 4200))

1 row selected.
```

Query table before inserting row into nested table:

```
SELECT employee_id, last_name, job_id, salary
FROM employees
WHERE department_id = 10;
```

Result:

```
EMPLOYEE_ID LAST_NAME                 JOB_ID         SALARY
----------- ------------------------- ---------- ----------
        200 Whalen                    AD_ASST          4200

1 row selected.
```

Insert a row into nested table:

```
INSERT INTO TABLE (
  SELECT d.emplist
  FROM dept_view d
  WHERE department_id = 10
)
VALUES (1001, 'Glenn', 'AC_MGR', 10000);
```

Query view after inserting row into nested table:

```
SELECT emplist FROM dept_view WHERE department_id=10;
```

Result (formatted to fit page):

```
EMPLIST(EMP_ID, LASTNAME, JOB, SAL)
-------------------------------------------------------------------------------

EMP_LIST_(NTE(200, 'Whalen', 'AD_ASST', 4200),
          NTE(1001, 'Glenn', 'AC_MGR', 10000))

1 row selected.
```

Query table after inserting row into nested table:

```
SELECT employee_id, last_name, job_id, salary
FROM employees
WHERE department_id = 10;
```

Result:

```
EMPLOYEE_ID LAST_NAME                 JOB_ID         SALARY
----------- ------------------------- ---------- ----------
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
       200 Whalen                    AD_ASST          4200
      1001 Glenn                     AC_MGR          10000

2 rows selected.
```

Compound DML Triggers

A compound DML trigger created on a table or editioning view can fire at multiple timing points. Each timing point section has its own executable part and optional exception-handling part, but all of these parts can access a common PL/SQL state. The common state is established when the triggering statement starts and is destroyed when the triggering statement completes, even when the triggering statement causes an error.

A compound DML trigger created on a noneditioning view is not really compound, because it has only one timing point section.

A compound trigger can be conditional, but not autonomous.

Two common uses of compound triggers are:

- To accumulate rows destined for a second table so that you can periodically bulk-insert them
- To avoid the mutating-table error (ORA-04091)

Topics

- Compound DML Trigger Structure
- Compound DML Trigger Restrictions
- Performance Benefit of Compound DML Triggers
- Using Compound DML Triggers with Bulk Insertion
- Using Compound DML Triggers to Avoid Mutating-Table Error

Compound DML Trigger Structure

The optional declarative part of a compound trigger declares variables and subprograms that all of its timing-point sections can use. When the trigger fires, the declarative part runs before any timing-point sections run. The variables and subprograms exist for the duration of the triggering statement.

A compound DML trigger created on a noneditioning view is not really compound, because it has only one timing point section. The syntax for creating the simplest compound DML trigger on a noneditioning view is:

```
CREATE trigger FOR dml_event_clause ON view
COMPOUND TRIGGER
INSTEAD OF EACH ROW IS BEGIN
  statement;
END INSTEAD OF EACH ROW;
```

A compound DML trigger created on a table or editioning view has at least one timing-point section in Table 10-2. If the trigger has multiple timing-point sections, they can be in any order, but no timing-point section can be repeated. If a timing-point section is absent, then nothing happens at its timing point.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-2 Compound Trigger Timing-Point Sections

Timing Point	Section
Before the triggering statement runs	`BEFORE STATEMENT`
After the triggering statement runs	`AFTER STATEMENT`
Before each row that the triggering statement affects	`BEFORE EACH ROW`
After each row that the triggering statement affects	`AFTER EACH ROW`

> **See Also**
>
> "CREATE TRIGGER Statement" for more information about the syntax of compound triggers

A compound DML trigger does not have an initialization section, but the `BEFORE STATEMENT` section, which runs before any other timing-point section, can do any necessary initialization.

If a compound DML trigger has neither a `BEFORE STATEMENT` section nor an `AFTER STATEMENT` section, and its triggering statement affects no rows, then the trigger never fires.

Compound DML Trigger Restrictions

In addition to the "Trigger Restrictions"), compound DML triggers have these restrictions:

- `OLD`, `NEW`, and `PARENT` cannot appear in the declarative part, the `BEFORE STATEMENT` section, or the `AFTER STATEMENT` section.
- Only the `BEFORE EACH ROW` section can change the value of `NEW`.
- A timing-point section cannot handle exceptions raised in another timing-point section.
- If a timing-point section includes a `GOTO` statement, the target of the `GOTO` statement must be in the same timing-point section.

Performance Benefit of Compound DML Triggers

A compound DML trigger has a performance benefit when the triggering statement affects many rows.

For example, suppose that this statement triggers a compound DML trigger that has all four timing-point sections in Table 10-2:

```
INSERT INTO Target
  SELECT c1, c2, c3
  FROM Source
  WHERE Source.c1 > 0
```

Although the `BEFORE EACH ROW` and `AFTER EACH ROW` sections of the trigger run for each row of `Source` whose column `c1` is greater than zero, the `BEFORE STATEMENT` section runs only before the `INSERT` statement runs and the `AFTER STATEMENT` section runs only after the `INSERT` statement runs.

A compound DML trigger has a greater performance benefit when it uses bulk SQL, described in "Bulk SQL and Bulk Binding".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Using Compound DML Triggers with Bulk Insertion

A compound DML trigger is useful for accumulating rows destined for a second table so that you can periodically bulk-insert them. To get the performance benefit from the compound trigger, you must specify `BULK COLLECT INTO` in the `FORALL` statement (otherwise, the `FORALL` statement does a single-row DML operation multiple times). For more information about using the `BULK COLLECT` clause with the `FORALL` statement, see "Using FORALL Statement and BULK COLLECT Clause Together".

> **See Also**
>
> "FORALL Statement"

Scenario: You want to log every change to `hr.employees.salary` in a new table, `employee_salaries`. A single `UPDATE` statement updates many rows of the table `hr.employees`; therefore, bulk-inserting rows into `employee.salaries` is more efficient than inserting them individually.

Solution: Define a compound trigger on updates of the table `hr.employees`, as in Example 10-4. You do not need a `BEFORE STATEMENT` section to initialize `idx` or `salaries`, because they are state variables, which are initialized each time the trigger fires (even when the triggering statement is interrupted and restarted).

> **Note**
>
> To run Example 10-4, you must have the `EXECUTE` privilege on the package `DBMS_LOCK`.

Example 10-4 Compound Trigger Logs Changes to One Table in Another Table

```
CREATE TABLE employee_salaries (
  employee_id NUMBER NOT NULL,
  change_date DATE   NOT NULL,
  salary NUMBER(8,2) NOT NULL,
  CONSTRAINT pk_employee_salaries PRIMARY KEY (employee_id, change_date),
  CONSTRAINT fk_employee_salaries FOREIGN KEY (employee_id)
    REFERENCES employees (employee_id)
      ON DELETE CASCADE)
/
CREATE OR REPLACE TRIGGER maintain_employee_salaries
  FOR UPDATE OF salary ON employees
    COMPOUND TRIGGER

-- Declarative Part:
-- Choose small threshhold value to show how example works:
  threshhold CONSTANT SIMPLE_INTEGER := 7;

  TYPE salaries_t IS TABLE OF employee_salaries%ROWTYPE INDEX BY
SIMPLE_INTEGER;
  salaries  salaries_t;
  idx       SIMPLE_INTEGER := 0;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PROCEDURE flush_array IS
    n CONSTANT SIMPLE_INTEGER := salaries.count();
  BEGIN
    FORALL j IN 1..n
      INSERT INTO employee_salaries VALUES salaries(j);
    salaries.delete();
    idx := 0;
    DBMS_OUTPUT.PUT_LINE('Flushed ' || n || ' rows');
  END flush_array;

  -- AFTER EACH ROW Section:

  AFTER EACH ROW IS
  BEGIN
    idx := idx + 1;
    salaries(idx).employee_id := :NEW.employee_id;
    salaries(idx).change_date := SYSTIMESTAMP;
    salaries(idx).salary := :NEW.salary;
    IF idx >= threshhold THEN
      flush_array();
    END IF;
  END AFTER EACH ROW;

  -- AFTER STATEMENT Section:

  AFTER STATEMENT IS
  BEGIN
    flush_array();
  END AFTER STATEMENT;
END maintain_employee_salaries;
/
```

Increase salary of every employee in department 50 by 10%:

```
UPDATE employees
  SET salary = salary * 1.1
  WHERE department_id = 50
/
```

Result:

```
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 3 rows

45 rows updated.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Wait two seconds:

```
BEGIN
  DBMS_SESSION.SLEEP(2);
END;
/
```

Increase salary of every employee in department 50 by 5%:

```
UPDATE employees
  SET salary = salary * 1.05
  WHERE department_id = 50
/
```

Result:

```
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 7 rows
Flushed 3 rows

45 rows updated.
```

See changes to employees table reflected in `employee_salaries` table:

```
SELECT employee_id, count(*) c
  FROM employee_salaries
  GROUP BY employee_id
/
```

Result:

```
EMPLOYEE_ID          C
----------- ----------
        120          2
        121          2
        122          2
        123          2
        124          2
        125          2
...
        199          2

45 rows selected.
```

Using Compound DML Triggers to Avoid Mutating-Table Error

A compound DML trigger is useful for avoiding the mutating-table error (ORA-04091) explained in "Mutating-Table Restriction".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Scenario: A business rule states that an employee's salary increase must not exceed 10% of the average salary for the employee's department. This rule must be enforced by a trigger.

Solution: Define a compound trigger on updates of the table `hr.employees`, as in Example 10-5. The state variables are initialized each time the trigger fires (even when the triggering statement is interrupted and restarted).

Example 10-5 Compound Trigger Avoids Mutating-Table Error

```
CREATE OR REPLACE TRIGGER Check_Employee_Salary_Raise
  FOR UPDATE OF Salary ON Employees
COMPOUND TRIGGER
  Ten_Percent                 CONSTANT NUMBER := 0.1;
  TYPE Salaries_t             IS TABLE OF Employees.Salary%TYPE;
  Avg_Salaries                Salaries_t;
  TYPE Department_IDs_t       IS TABLE OF Employees.Department_ID%TYPE;
  Department_IDs              Department_IDs_t;

  -- Declare collection type and variable:

  TYPE Department_Salaries_t  IS TABLE OF Employees.Salary%TYPE
                                INDEX BY VARCHAR2(80);
  Department_Avg_Salaries     Department_Salaries_t;

  BEFORE STATEMENT IS
  BEGIN
    SELECT               AVG(e.Salary), NVL(e.Department_ID, -1)
      BULK COLLECT INTO  Avg_Salaries, Department_IDs
      FROM               Employees e
      GROUP BY           e.Department_ID;
    FOR j IN 1..Department_IDs.COUNT() LOOP
      Department_Avg_Salaries(Department_IDs(j)) := Avg_Salaries(j);
    END LOOP;
  END BEFORE STATEMENT;

  AFTER EACH ROW IS
  BEGIN
    IF :NEW.Salary - :Old.Salary >
      Ten_Percent*Department_Avg_Salaries(:NEW.Department_ID)
    THEN
      Raise_Application_Error(-20000, 'Raise too big');
    END IF;
  END AFTER EACH ROW;
END Check_Employee_Salary_Raise;
```

Triggers for Ensuring Referential Integrity

You can use triggers and constraints to maintain referential integrity between parent and child tables, as Table 10-3 shows. (For more information about constraints, see *Oracle Database SQL Language Reference*.)

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-3 Constraints and Triggers for Ensuring Referential Integrity

Table	Constraint to Declare on Table	Triggers to Create on Table
Parent	`PRIMARY KEY` or `UNIQUE`	One or more triggers that ensure that when `PRIMARY KEY` or `UNIQUE` values are updated or deleted, the desired action (`RESTRICT`, `CASCADE`, or `SET NULL`) occurs on corresponding `FOREIGN KEY` values. No action is required for inserts into the parent table, because no dependent foreign keys exist.
Child	`FOREIGN KEY`, if parent and child are in the same database. (The database does not support declarative referential constraints between tables on different nodes of a distributed database.) Disable this foreign key constraint to prevent the corresponding `PRIMARY KEY` or `UNIQUE` constraint from being dropped (except explicitly with the `CASCADE` option).	One trigger that ensures that values inserted or updated in the `FOREIGN KEY` correspond to `PRIMARY KEY` or `UNIQUE` values in the parent table.

Topics

- Foreign Key Trigger for Child Table
- UPDATE and DELETE RESTRICT Trigger for Parent Table
- UPDATE and DELETE SET NULL Trigger for Parent Table
- DELETE CASCADE Trigger for Parent Table
- UPDATE CASCADE Trigger for Parent Table
- Triggers for Complex Constraint Checking
- Triggers for Complex Security Authorizations
- Triggers for Transparent Event Logging
- Triggers for Deriving Column Values
- Triggers for Building Complex Updatable Views
- Triggers for Fine-Grained Access Control

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The examples in the following topics use these tables, which share the column `Deptno`:
>
> ```
> CREATE TABLE emp (
>   Empno     NUMBER NOT NULL,
>   Ename     VARCHAR2(10),
>   Job       VARCHAR2(9),
>   Mgr       NUMBER(4),
>   Hiredate  DATE,
>   Sal       NUMBER(7,2),
>   Comm      NUMBER(7,2),
>   Deptno    NUMBER(2) NOT NULL);
>
> CREATE TABLE dept (
>   Deptno    NUMBER(2) NOT NULL,
>   Dname     VARCHAR2(14),
>   Loc       VARCHAR2(13),
>   Mgr_no    NUMBER,
>   Dept_type NUMBER);
> ```
>
> Several triggers include statements that lock rows (`SELECT FOR UPDATE`). This operation is necessary to maintain concurrency while the rows are being processed.
>
> These examples are not meant to be used exactly as written. They are provided to assist you in designing your own triggers.

Foreign Key Trigger for Child Table

The trigger in Example 10-6 ensures that before an `INSERT` or `UPDATE` statement affects a foreign key value, the corresponding value exists in the parent key. The exception ORA-04091 (mutating-table error) allows the trigger `emp_dept_check` to be used with the `UPDATE_SET_DEFAULT` and `UPDATE_CASCADE` triggers. This exception is unnecessary if the trigger `emp_dept_check` is used alone.

Example 10-6 Foreign Key Trigger for Child Table

```
CREATE OR REPLACE TRIGGER emp_dept_check
  BEFORE INSERT OR UPDATE OF Deptno ON emp
  FOR EACH ROW WHEN (NEW.Deptno IS NOT NULL)

  -- Before row is inserted or DEPTNO is updated in emp table,
  -- fire this trigger to verify that new foreign key value (DEPTNO)
  -- is present in dept table.
DECLARE
  Dummy               INTEGER;  -- Use for cursor fetch
  Invalid_department  EXCEPTION;
  Valid_department    EXCEPTION;
  Mutating_table      EXCEPTION;
  PRAGMA EXCEPTION_INIT (Invalid_department, -4093);
  PRAGMA EXCEPTION_INIT (Valid_department, -4092);
  PRAGMA EXCEPTION_INIT (Mutating_table, -4091);

  -- Cursor used to verify parent key value exists.
  -- If present, lock parent key's row so it cannot be deleted
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- by another transaction until this transaction is
  -- committed or rolled back.

  CURSOR Dummy_cursor (Dn NUMBER) IS
    SELECT Deptno FROM dept
    WHERE Deptno = Dn
    FOR UPDATE OF Deptno;
BEGIN
  OPEN Dummy_cursor (:NEW.Deptno);
  FETCH Dummy_cursor INTO Dummy;

  -- Verify parent key.
  -- If not found, raise user-specified error code and message.
  -- If found, close cursor before allowing triggering statement to complete:

  IF Dummy_cursor%NOTFOUND THEN
    RAISE Invalid_department;
  ELSE
    RAISE Valid_department;
  END IF;
  CLOSE Dummy_cursor;
EXCEPTION
  WHEN Invalid_department THEN
    CLOSE Dummy_cursor;
    Raise_application_error(-20000, 'Invalid Department'
      || ' Number' || TO_CHAR(:NEW.deptno));
  WHEN Valid_department THEN
    CLOSE Dummy_cursor;
  WHEN Mutating_table THEN
    NULL;
END;
/
```

UPDATE and DELETE RESTRICT Trigger for Parent Table

The trigger in Example 10-7 enforces the `UPDATE` and `DELETE RESTRICT` referential action on the primary key of the `dept` table.

> **⚠ Caution**
>
> The trigger in Example 10-7 does not work with self-referential tables (tables with both the primary/unique key and the foreign key). Also, this trigger does not allow triggers to cycle (such as when A fires B, which fires A).

Example 10-7 UPDATE and DELETE RESTRICT Trigger for Parent Table

```
CREATE OR REPLACE TRIGGER dept_restrict
  BEFORE DELETE OR UPDATE OF Deptno ON dept
  FOR EACH ROW

  -- Before row is deleted from dept or primary key (DEPTNO) of dept is updated,
  -- check for dependent foreign key values in emp;
  -- if any are found, roll back.

DECLARE
  Dummy                 INTEGER;  -- Use for cursor fetch
  employees_present     EXCEPTION;
  employees_not_present  EXCEPTION;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PRAGMA EXCEPTION_INIT (employees_present, -4094);
  PRAGMA EXCEPTION_INIT (employees_not_present, -4095);

  -- Cursor used to check for dependent foreign key values.
  CURSOR Dummy_cursor (Dn NUMBER) IS
    SELECT Deptno FROM emp WHERE Deptno = Dn;

BEGIN
  OPEN Dummy_cursor (:OLD.Deptno);
  FETCH Dummy_cursor INTO Dummy;

  -- If dependent foreign key is found, raise user-specified
  -- error code and message. If not found, close cursor
  -- before allowing triggering statement to complete.

  IF Dummy_cursor%FOUND THEN
    RAISE employees_present;     -- Dependent rows exist
  ELSE
    RAISE employees_not_present; -- No dependent rows exist
  END IF;
  CLOSE Dummy_cursor;

EXCEPTION
  WHEN employees_present THEN
    CLOSE Dummy_cursor;
    Raise_application_error(-20001, 'Employees Present in'
      || ' Department ' || TO_CHAR(:OLD.DEPTNO));
  WHEN employees_not_present THEN
    CLOSE Dummy_cursor;
END;
```

UPDATE and DELETE SET NULL Trigger for Parent Table

The trigger in Example 10-8 enforces the `UPDATE` and `DELETE SET NULL` referential action on the primary key of the `dept` table.

Example 10-8 UPDATE and DELETE SET NULL Trigger for Parent Table

```
CREATE OR REPLACE TRIGGER dept_set_null
  AFTER DELETE OR UPDATE OF Deptno ON dept
  FOR EACH ROW

  -- Before row is deleted from dept or primary key (DEPTNO) of dept is updated,
  -- set all corresponding dependent foreign key values in emp to NULL:

BEGIN
  IF UPDATING AND :OLD.Deptno != :NEW.Deptno OR DELETING THEN
    UPDATE emp SET emp.Deptno = NULL
    WHERE emp.Deptno = :OLD.Deptno;
  END IF;
END;
/
```

DELETE CASCADE Trigger for Parent Table

The trigger in Example 10-9 enforces the `DELETE CASCADE` referential action on the primary key of the `dept` table.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Typically, the code for `DELETE CASCADE` is combined with the code for `UPDATE SET NULL` or `UPDATE SET DEFAULT`, to account for both updates and deletes.

Example 10-9 DELETE CASCADE Trigger for Parent Table

```
CREATE OR REPLACE TRIGGER dept_del_cascade
  AFTER DELETE ON dept
  FOR EACH ROW

  -- Before row is deleted from dept,
  -- delete all rows from emp table whose DEPTNO is same as
  -- DEPTNO being deleted from dept table:

BEGIN
  DELETE FROM emp
  WHERE emp.Deptno = :OLD.Deptno;
END;
/
```

UPDATE CASCADE Trigger for Parent Table

The triggers in Example 10-10 ensure that if a department number is updated in the `dept` table, then this change is propagated to dependent foreign keys in the `emp` table.

> **Note**
>
> Because the trigger `dept_cascade2` updates the `emp` table, the `emp_dept_check` trigger in Example 10-6, if enabled, also fires. The resulting mutating-table error is trapped by the `emp_dept_check` trigger. Carefully test any triggers that require error trapping to succeed to ensure that they always work properly in your environment.

Example 10-10 UPDATE CASCADE Trigger for Parent Table

```
-- Generate sequence number to be used as flag
-- for determining if update occurred on column:

CREATE SEQUENCE Update_sequence
  INCREMENT BY 1 MAXVALUE 5000 CYCLE;

CREATE OR REPLACE PACKAGE Integritypackage AUTHID DEFINER AS
  Updateseq NUMBER;
END Integritypackage;
/
CREATE OR REPLACE PACKAGE BODY Integritypackage AS
END Integritypackage;
/
-- Create flag col:

ALTER TABLE emp ADD Update_id NUMBER;

CREATE OR REPLACE TRIGGER dept_cascade1
  BEFORE UPDATE OF Deptno ON dept
DECLARE
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- Before updating dept table (this is a statement trigger),
  -- generate sequence number
  -- & assign it to public variable UPDATESEQ of
  -- user-defined package named INTEGRITYPACKAGE:
BEGIN
  Integritypackage.Updateseq := Update_sequence.NEXTVAL;
END;
/
CREATE OR REPLACE TRIGGER dept_cascade2
  AFTER DELETE OR UPDATE OF Deptno ON dept
  FOR EACH ROW

  -- For each department number in dept that is updated,
  -- cascade update to dependent foreign keys in emp table.
  -- Cascade update only if child row was not updated by this trigger:
BEGIN
  IF UPDATING THEN
    UPDATE emp
    SET Deptno = :NEW.Deptno,
        Update_id = Integritypackage.Updateseq   --from 1st
    WHERE emp.Deptno = :OLD.Deptno
    AND Update_id IS NULL;

    /* Only NULL if not updated by 3rd trigger
       fired by same triggering statement */
  END IF;
  IF DELETING THEN
    -- After row is deleted from dept,
    -- delete all rows from emp table whose DEPTNO is same as
    -- DEPTNO being deleted from dept table:
    DELETE FROM emp
    WHERE emp.Deptno = :OLD.Deptno;
  END IF;
END;
/
CREATE OR REPLACE TRIGGER dept_cascade3
  AFTER UPDATE OF Deptno ON dept
BEGIN UPDATE emp
  SET Update_id = NULL
  WHERE Update_id = Integritypackage.Updateseq;
END;
/
```

Triggers for Complex Constraint Checking

Triggers can enforce integrity rules other than referential integrity. The trigger in Example 10-11 does a complex check before allowing the triggering statement to run.

> **Note**
>
> Example 10-11 needs this data structure:
>
> ```
> CREATE TABLE Salgrade (
>   Grade               NUMBER,
>   Losal               NUMBER,
>   Hisal               NUMBER,
>   Job_classification  VARCHAR2(9));
> ```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 10-11 Trigger Checks Complex Constraints

```
CREATE OR REPLACE TRIGGER salary_check
  BEFORE INSERT OR UPDATE OF Sal, Job ON Emp
  FOR EACH ROW

DECLARE
  Minsal               NUMBER;
  Maxsal               NUMBER;
  Salary_out_of_range  EXCEPTION;
  PRAGMA EXCEPTION_INIT (Salary_out_of_range, -4096);

BEGIN
  /* Retrieve minimum & maximum salary for employee's new job classification
     from SALGRADE table into MINSAL and MAXSAL: */

  SELECT Losal, Hisal INTO Minsal, Maxsal
  FROM Salgrade
  WHERE Job_classification = :NEW.Job;

  /* If employee's new salary is less than or greater than
     job classification's limits, raise exception.
     Exception message is returned and pending INSERT or UPDATE statement
     that fired the trigger is rolled back: */

  IF (:NEW.Sal < Minsal OR :NEW.Sal > Maxsal) THEN
    RAISE Salary_out_of_range;
  END IF;
EXCEPTION
  WHEN Salary_out_of_range THEN
    Raise_application_error (
      -20300,
      'Salary '|| TO_CHAR(:NEW.Sal) ||' out of range for '
      || 'job classification ' ||:NEW.Job
      ||' for employee ' || :NEW.Ename
    );
  WHEN NO_DATA_FOUND THEN
    Raise_application_error(-20322, 'Invalid Job Classification');
END;
/
```

Triggers for Complex Security Authorizations

Triggers are commonly used to enforce complex security authorizations for table data. Use triggers only to enforce complex security authorizations that you cannot define using the database security features provided with the database. For example, use a trigger to prohibit updates to the `employee` table during weekends and nonworking hours.

When using a trigger to enforce a complex security authorization, it is best to use a `BEFORE` statement trigger. Using a `BEFORE` statement trigger has these benefits:

- The security check is done before the triggering statement is allowed to run, so that no wasted work is done by an unauthorized statement.
- The security check is done only for the triggering statement, not for each row affected by the triggering statement.

The trigger in Example 10-12 enforces security by raising exceptions when anyone tries to update the table `employees` during weekends or nonworking hours.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> *Oracle Database Security Guide* for detailed information about database security features

Example 10-12 Trigger Enforces Security Authorizations

```
CREATE OR REPLACE TRIGGER Employee_permit_changes
  BEFORE INSERT OR DELETE OR UPDATE ON employees
DECLARE
  Dummy             INTEGER;
  Not_on_weekends   EXCEPTION;
  Nonworking_hours  EXCEPTION;
  PRAGMA EXCEPTION_INIT (Not_on_weekends, -4097);
  PRAGMA EXCEPTION_INIT (Nonworking_hours, -4099);
BEGIN
   -- Check for weekends:

   IF (TO_CHAR(Sysdate, 'DAY') = 'SAT' OR
     TO_CHAR(Sysdate, 'DAY') = 'SUN') THEN
       RAISE Not_on_weekends;
   END IF;

  -- Check for work hours (8am to 6pm):

  IF (TO_CHAR(Sysdate, 'HH24') < 8 OR
    TO_CHAR(Sysdate, 'HH24') > 18) THEN
      RAISE Nonworking_hours;
  END IF;

EXCEPTION
  WHEN Not_on_weekends THEN
    Raise_application_error(-20324,'Might not change '
      ||'employee table during the weekend');
  WHEN Nonworking_hours THEN
    Raise_application_error(-20326,'Might not change '
     ||'emp table during Nonworking hours');
END;
/
```

Triggers for Transparent Event Logging

Triggers are very useful when you want to transparently do a related change in the database following certain events.

The `REORDER` trigger example shows a trigger that reorders parts as necessary when certain conditions are met. (In other words, a triggering statement is entered, and the `PARTS_ON_HAND` value is less than the `REORDER_POINT` value.)

Triggers for Deriving Column Values

Triggers can derive column values automatically, based upon a value provided by an `INSERT` or `UPDATE` statement. This type of trigger is useful to force values in specific columns that depend on the values of other columns in the same row. `BEFORE` row triggers are necessary to complete this type of operation for these reasons:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- The dependent values must be derived before the `INSERT` or `UPDATE` occurs, so that the triggering statement can use the derived values.
- The trigger must fire for each row affected by the triggering `INSERT` or `UPDATE` statement.

The trigger in Example 10-13 derives new column values for a table whenever a row is inserted or updated.

> **Note**
>
> Example 10-13 needs this change to this data structure:
>
> ```
> ALTER TABLE Emp ADD(
>    Uppername   VARCHAR2(20),
>    Soundexname VARCHAR2(20));
> ```

Example 10-13 Trigger Derives New Column Values

```
CREATE OR REPLACE TRIGGER Derived
BEFORE INSERT OR UPDATE OF Ename ON Emp

/* Before updating the ENAME field, derive the values for
   the UPPERNAME and SOUNDEXNAME fields. Restrict users
   from updating these fields directly: */
FOR EACH ROW
BEGIN
  :NEW.Uppername := UPPER(:NEW.Ename);
  :NEW.Soundexname := SOUNDEX(:NEW.Ename);
END;
/
```

Triggers for Building Complex Updatable Views

Views are an excellent mechanism to provide logical windows over table data. However, when the view query gets complex, the system implicitly cannot translate the DML on the view into those on the underlying tables. `INSTEAD OF` triggers help solve this problem. These triggers can be defined over views, and they fire instead of the actual DML.

Consider a library system where books are arranged by title. The library consists of a collection of book type objects:

```
CREATE OR REPLACE TYPE Book_t AS OBJECT (
  Booknum    NUMBER,
  Title      VARCHAR2(20),
  Author     VARCHAR2(20),
  Available  CHAR(1)
);
/
CREATE OR REPLACE TYPE Book_list_t AS TABLE OF Book_t;
/
```

The table `Book_table` is created and populated like this:

```
DROP TABLE Book_table;
CREATE TABLE Book_table (
  Booknum    NUMBER,
  Section    VARCHAR2(20),
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  Title      VARCHAR2(20),
  Author     VARCHAR2(20),
  Available  CHAR(1)
);

INSERT INTO Book_table (
  Booknum, Section, Title, Author, Available
)
VALUES (
  121001, 'Classic', 'Iliad', 'Homer', 'Y'
);

INSERT INTO Book_table (
  Booknum, Section, Title, Author, Available
)
VALUES (
  121002, 'Novel', 'Gone with the Wind', 'Mitchell M', 'N'
);

SELECT * FROM Book_table ORDER BY Booknum;
```

Result:

```
   BOOKNUM SECTION              TITLE                AUTHOR               A
---------- -------------------- -------------------- -------------------- -
    121001 Classic              Iliad                Homer                Y
    121002 Novel                Gone with the Wind   Mitchell M           N

2 rows selected.
```

The table `Library_table` is created and populated like this:

```
DROP TABLE Library_table;
CREATE TABLE Library_table (Section VARCHAR2(20));

INSERT INTO Library_table (Section)
VALUES ('Novel');

INSERT INTO Library_table (Section)
VALUES ('Classic');

SELECT * FROM Library_table ORDER BY Section;
```

Result:

```
SECTION
--------------------
Classic
Novel

2 rows selected.
```

You can define a complex view over the tables `Book_table` and `Library_table` to create a logical view of the library with sections and a collection of books in each section:

```
CREATE OR REPLACE VIEW Library_view AS
  SELECT i.Section, CAST (
    MULTISET (
      SELECT b.Booknum, b.Title, b.Author, b.Available
      FROM Book_table b
      WHERE b.Section = i.Section
    ) AS Book_list_t
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  ) BOOKLIST
  FROM Library_table i;
```

(For information about the CAST function, see *Oracle Database SQL Language Reference*.)

Make Library_view updatable by defining an INSTEAD OF trigger on it:

```
CREATE OR REPLACE TRIGGER Library_trigger
  INSTEAD OF
  INSERT ON Library_view
  FOR EACH ROW
DECLARE
  Bookvar  Book_t;
  i        INTEGER;
BEGIN
  INSERT INTO Library_table
  VALUES (:NEW.Section);

  FOR i IN 1..:NEW.Booklist.COUNT LOOP
    Bookvar := :NEW.Booklist(i);

    INSERT INTO Book_table (
      Booknum, Section, Title, Author, Available
    )
    VALUES (
      Bookvar.booknum, :NEW.Section, Bookvar.Title,
      Bookvar.Author, bookvar.Available
    );
  END LOOP;
END;
/
```

Insert a new row into Library_view:

```
INSERT INTO Library_view (Section, Booklist)
VALUES (
  'History',
  book_list_t (book_t (121330, 'Alexander', 'Mirth', 'Y'))
);
```

See the effect on Library_view:

```
SELECT * FROM Library_view ORDER BY Section;
```

Result:

```
SECTION
--------------------
BOOKLIST(BOOKNUM, TITLE, AUTHOR, AVAILABLE)
--------------------------------------------------------------------

Classic
BOOK_LIST_T(BOOK_T(121001, 'Iliad', 'Homer', 'Y'))

History
BOOK_LIST_T(BOOK_T(121330, 'Alexander', 'Mirth', 'Y'))

Novel
BOOK_LIST_T(BOOK_T(121002, 'Gone with the Wind', 'Mitchell M', 'N'))


3 rows selected.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

See the effect on `Book_table`:

```
SELECT * FROM Book_table ORDER BY Booknum;
```

Result:

```
   BOOKNUM SECTION              TITLE                AUTHOR               A
---------- -------------------- -------------------- -------------------- -
    121001 Classic              Iliad                Homer                Y
    121002 Novel                Gone with the Wind   Mitchell M           N
    121330 History              Alexander            Mirth                Y

3 rows selected.
```

See the effect on `Library_table`:

```
SELECT * FROM Library_table ORDER BY Section;
```

Result:

```
SECTION
--------------------
Classic
History
Novel

3 rows selected.
```

Similarly, you can also define triggers on the nested table `booklist` to handle modification of the nested table element.

Triggers for Fine-Grained Access Control

You can use `LOGON` triggers to run the package associated with an application context. An application context captures session-related information about the user who is logging in to the database. From there, your application can control how much access this user has, based on their session information.

> **Note**
>
> If you have very specific logon requirements, such as preventing users from logging in from outside the firewall or after work hours, consider using Oracle Database Vault instead of `LOGON` triggers. With Oracle Database Vault, you can create custom rules to strictly control user access.

> **See Also**
>
> - *Oracle Database Security Guide* for information about creating a `LOGON` trigger to run a database session application context package
> - *Oracle Database Vault Administrator's Guide* for information about Oracle Database Vault

Copyright © 1996, 2025, Oracle and/or its affiliates.

Correlation Names and Pseudorecords

> **Note**
>
> This topic applies only to triggers that fire at row level. That is:
>
> - Row-level simple DML triggers
> - Compound DML triggers with row-level timing point sections

A trigger that fires at row level can access the data in the row that it is processing by using **correlation names**. The default correlation names are `OLD`, `NEW`, and `PARENT`. To change the correlation names, use the `REFERENCING` clause of the `CREATE TRIGGER` statement (see "*referencing_clause ::=*").

If the trigger is created on a nested table, then `OLD` and `NEW` refer to the current row of the nested table, and `PARENT` refers to the current row of the parent table. If the trigger is created on a table or view, then `OLD` and `NEW` refer to the current row of the table or view, and `PARENT` is undefined.

`OLD`, `NEW`, and `PARENT` are also called **pseudorecords**, because they have record structure, but are allowed in fewer contexts than records are. The structure of a pseudorecord is *`table_name`*`%ROWTYPE`, where *`table_name`* is the name of the table on which the trigger is created (for `OLD` and `NEW`) or the name of the parent table (for `PARENT`).

In the *`trigger_body`* of a simple trigger or the *`tps_body`* of a compound trigger, a correlation name is a placeholder for a bind variable. Reference the field of a pseudorecord with this syntax:

```
:pseudorecord_name.field_name
```

In the `WHEN` clause of a conditional trigger, a correlation name is not a placeholder for a bind variable. Therefore, omit the colon in the preceding syntax.

Table 10-4 shows the values of `OLD` and `NEW` fields for the row that the triggering statement is processing.

Table 10-4 OLD and NEW Pseudorecord Field Values

Triggering Statement	OLD.*field* Value	NEW.*field* Value
`INSERT`	`NULL`	Post-insert value
`UPDATE`	Pre-update value	Post-update value
`DELETE`	Pre-delete value	`NULL`

The restrictions on pseudorecords are:

- A pseudorecord cannot appear in a record-level operation.

  For example, the trigger cannot include this statement:

  ```
  :NEW := NULL;
  ```

- A pseudorecord cannot be an actual subprogram parameter.

  (A pseudorecord field can be an actual subprogram parameter.)

Copyright © 1996, 2025, Oracle and/or its affiliates.

- The trigger cannot change `OLD` field values.

  Trying to do so raises ORA-04085.

- If the triggering statement is `DELETE`, then the trigger cannot change `NEW` field values.

  Trying to do so raises ORA-04084.

- An `AFTER` trigger cannot change `NEW` field values, because the triggering statement runs before the trigger fires.

  Trying to do so raises ORA-04084.

A `BEFORE` trigger can change `NEW` field values before a triggering `INSERT` or `UPDATE` statement puts them in the table.

If a statement triggers both a `BEFORE` trigger and an `AFTER` trigger, and the `BEFORE` trigger changes a `NEW` field value, then the `AFTER` trigger "sees" that change.

Example 10-14 Trigger Logs Changes to EMPLOYEES.SALARY

This example creates a log table and a trigger that inserts a row in the log table after any `UPDATE` statement affects the `SALARY` column of the `EMPLOYEES` table, and then updates `EMPLOYEES.SALARY` and shows the log table.

Create log table:

```
DROP TABLE Emp_log;
CREATE TABLE Emp_log (
  Emp_id     NUMBER,
  Log_date   DATE,
  New_salary NUMBER,
  Action     VARCHAR2(20));
```

Create trigger that inserts row in log table after `EMPLOYEES.SALARY` is updated:

```
CREATE OR REPLACE TRIGGER log_salary_increase
  AFTER UPDATE OF salary ON employees
  FOR EACH ROW
BEGIN
  INSERT INTO Emp_log (Emp_id, Log_date, New_salary, Action)
  VALUES (:NEW.employee_id, SYSDATE, :NEW.salary, 'New Salary');
END;
/
```

Update `EMPLOYEES.SALARY`:

```
UPDATE employees
SET salary = salary + 1000.0
WHERE Department_id = 20;
```

Result:

```
2 rows updated.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Show log table:

```
SELECT * FROM Emp_log;
```

Result:

```
    EMP_ID LOG_DATE  NEW_SALARY ACTION
---------- --------- ---------- --------------------
       201 28-APR-10      13650 New Salary
       202 28-APR-10       6300 New Salary

2 rows selected.
```

Example 10-15 Conditional Trigger Prints Salary Change Information

This example creates a conditional trigger that prints salary change information whenever a `DELETE`, `INSERT`, or `UPDATE` statement affects the `EMPLOYEES` table—unless that information is about the President. The database evaluates the `WHEN` condition for each affected row. If the `WHEN` condition is `TRUE` for an affected row, then the trigger fires for that row before the triggering statement runs. If the `WHEN` condition is not `TRUE` for an affected row, then trigger does not fire for that row, but the triggering statement still runs.

```
CREATE OR REPLACE TRIGGER print_salary_changes
  BEFORE DELETE OR INSERT OR UPDATE ON employees
  FOR EACH ROW
  WHEN (NEW.job_id <> 'AD_PRES')  -- do not print information about President
DECLARE
  sal_diff  NUMBER;
BEGIN
  sal_diff  := :NEW.salary  - :OLD.salary;
  DBMS_OUTPUT.PUT(:NEW.last_name || ': ');
  DBMS_OUTPUT.PUT('Old salary = ' || :OLD.salary || ', ');
  DBMS_OUTPUT.PUT('New salary = ' || :NEW.salary || ', ');
  DBMS_OUTPUT.PUT_LINE('Difference: ' || sal_diff);
END;
/
```

Query:

```
SELECT last_name, department_id, salary, job_id
FROM employees
WHERE department_id IN (10, 20, 90)
ORDER BY department_id, last_name;
```

Result:

```
LAST_NAME                 DEPARTMENT_ID     SALARY JOB_ID
------------------------- ------------- ---------- ----------
Whalen                               10       4200 AD_ASST
Davis                                20       6000 MK_REP
Martinez                             20      13000 MK_MAN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Garcia                                    90      17000 AD_VP
King                                      90      24000 AD_PRES
Yang                                      90      17000 AD_VP

6 rows selected.
```

Triggering statement:

```
UPDATE employees
SET salary = salary * 1.05
WHERE department_id IN (10, 20, 90);
```

Result:

```
Whalen: Old salary = 4200, New salary = 4410, Difference: 210
Martinez: Old salary = 13000, New salary = 13650, Difference: 650
Davis: Old salary = 6000, New salary = 6300, Difference: 300
Yang: Old salary = 17000, New salary = 17850, Difference: 850
Garcia: Old salary = 17000, New salary = 17850, Difference: 850

6 rows updated.
```

Query:

```
SELECT salary FROM employees WHERE job_id = 'AD_PRES';
```

Result:

```
    SALARY
----------
     25200

1 row selected.
```

Example 10-16 Trigger Modifies CLOB Columns

This example creates an `UPDATE` trigger that modifies `CLOB` columns.

For information about `TO_CLOB` and other conversion functions, see *Oracle Database SQL Language Reference*.

```
DROP TABLE tab1;
CREATE TABLE tab1 (c1 CLOB);
INSERT INTO tab1 VALUES ('<h1>HTML Document Fragment</h1><p>Some text.', 3);

CREATE OR REPLACE TRIGGER trg1
  BEFORE UPDATE ON tab1
  FOR EACH ROW
BEGIN
  DBMS_OUTPUT.PUT_LINE('Old value of CLOB column: '||:OLD.c1);
  DBMS_OUTPUT.PUT_LINE('Proposed new value of CLOB column: '||:NEW.c1);

  :NEW.c1 := :NEW.c1 || TO_CLOB('<hr><p>Standard footer paragraph.');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE('Final value of CLOB column: '||:NEW.c1);
END;
/

SET SERVEROUTPUT ON;
UPDATE tab1 SET c1 = '<h1>Different Document Fragment</h1><p>Different text.';

SELECT * FROM tab1;
```

Example 10-17 Trigger with REFERENCING Clause

This example creates a table with the same name as a correlation name, `new`, and then creates a trigger on that table. To avoid conflict between the table name and the correlation name, the trigger references the correlation name as `Newest`.

```
CREATE TABLE new (
  field1  NUMBER,
  field2  VARCHAR2(20)
);

CREATE OR REPLACE TRIGGER Print_salary_changes
BEFORE UPDATE ON new
REFERENCING new AS Newest
FOR EACH ROW
BEGIN
  :Newest.Field2 := TO_CHAR (:newest.field1);
END;
/
```

OBJECT_VALUE Pseudocolumn

A DML trigger on an object table can reference the SQL pseudocolumn `OBJECT_VALUE`, which returns system-generated names for the columns of the object table. The trigger can also invoke a PL/SQL subprogram that has a formal `IN` parameter whose data type is `OBJECT_VALUE`.

See Also

- *Oracle Database SQL Language Reference* for more information about `OBJECT_VALUE`
- *Oracle Database SQL Language Reference* for general information about pseudocolumns

Example 10-18 creates object table `tbl`, table `tbl_history` for logging updates to `tbl`, and trigger `Tbl_Trg`. The trigger runs for each row of `tb1` that is affected by a DML statement, causing the old and new values of the object `t` in `tbl` to be written in `tbl_history`. The old and new values are `:OLD.OBJECT_VALUE` and `:NEW.OBJECT_VALUE`.

All values of column `n` were increased by 1. The value of `m` remains 0.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 10-18 Trigger References OBJECT_VALUE Pseudocolumn

Create, populate, and show object table:

```
CREATE OR REPLACE TYPE t AUTHID DEFINER AS OBJECT (n NUMBER, m NUMBER)
/
CREATE TABLE tbl OF t
/
BEGIN
  FOR j IN 1..5 LOOP
    INSERT INTO tbl VALUES (t(j, 0));
  END LOOP;
END;
/
SELECT * FROM tbl ORDER BY n;
```

Result:

```
         N          M
---------- ----------
         1          0
         2          0
         3          0
         4          0
         5          0

5 rows selected.
```

Create history table and trigger:

```
CREATE TABLE tbl_history ( d DATE, old_obj t, new_obj t)
/
CREATE OR REPLACE TRIGGER Tbl_Trg
  AFTER UPDATE ON tbl
  FOR EACH ROW
BEGIN
  INSERT INTO tbl_history (d, old_obj, new_obj)
  VALUES (SYSDATE, :OLD.OBJECT_VALUE, :NEW.OBJECT_VALUE);
END Tbl_Trg;
/
```

Update object table:

```
UPDATE tbl SET tbl.n = tbl.n+1
/
```

Result:

```
5 rows updated.
```

Show old and new values:

```
BEGIN
  FOR j IN (SELECT d, old_obj, new_obj FROM tbl_history) LOOP
    DBMS_OUTPUT.PUT_LINE (
      j.d ||
      ' -- old: ' || j.old_obj.n || ' ' || j.old_obj.m ||
      ' -- new: ' || j.new_obj.n || ' ' || j.new_obj.m
    );
  END LOOP;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
28-APR-10 -- old: 1 0 -- new: 2 0
28-APR-10 -- old: 2 0 -- new: 3 0
28-APR-10 -- old: 3 0 -- new: 4 0
28-APR-10 -- old: 4 0 -- new: 5 0
28-APR-10 -- old: 5 0 -- new: 6 0
```

System Triggers

A **system trigger** is created on either a schema or the database.

Its triggering event is composed of either DDL statements (listed in "*ddl_event*") or database operation statements (listed in "*database_event*").

A system trigger fires at exactly one of these timing points:

- Before the triggering statement runs

  (The trigger is called a *BEFORE statement trigger* or *statement-level BEFORE trigger*.)
- After the triggering statement runs

  (The trigger is called a *AFTER statement trigger* or *statement-level AFTER trigger*.)
- Instead of the triggering `CREATE` statement

  (The trigger is called an *INSTEAD OF CREATE trigger*.)

Topics

- SCHEMA Triggers
- DATABASE Triggers
- INSTEAD OF CREATE Triggers

SCHEMA Triggers

A **`SCHEMA` trigger** is created on a schema and fires whenever the user who owns it is the current user and initiates the triggering event.

Suppose that both user1 and user2 own schema triggers, and user1 invokes a DR unit owned by user2. Inside the DR unit, user2 is the current user. Therefore, if the DR unit initiates the triggering event of a schema trigger that user2 owns, then that trigger fires. However, if the DR unit initiates the triggering event of a schema trigger that user1 owns, then that trigger does not fire.

Example 10-19 creates a `BEFORE` statement trigger on the sample schema `HR`. When a user connected as `HR` tries to drop a database object, the database fires the trigger before dropping the object.

Example 10-19 BEFORE Statement Trigger on Sample Schema HR

```
CREATE OR REPLACE TRIGGER drop_trigger
  BEFORE DROP ON hr.SCHEMA
  BEGIN
    RAISE_APPLICATION_ERROR (
      num => -20000,
      msg => 'Cannot drop object');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END;
/
```

DATABASE Triggers

A **`DATABASE` trigger** is created on the database and fires whenever any database user initiates the triggering event.

Example 10-20 shows the basic syntax for a trigger to log errors. This trigger fires after an unsuccessful statement execution, such as unsuccessful logon.

> **Note**
>
> An `AFTER SERVERERROR` trigger fires only if Oracle relational database management system (RDBMS) determines that it is safe to fire error triggers. For more information about `AFTER SERVERERROR` triggers, see CREATE TRIGGER Statement.

The trigger in Example 10-21 runs the procedure `check_user` after a user logs onto the database.

Example 10-20 AFTER Statement Trigger on Database

```
CREATE TRIGGER log_errors
  AFTER SERVERERROR ON DATABASE
  BEGIN
    IF (IS_SERVERERROR (1017)) THEN
      NULL;  -- (substitute code that processes logon error)
    ELSE
      NULL;  -- (substitute code that logs error code)
    END IF;
  END;
/
```

Example 10-21 Trigger Monitors Logons

```
CREATE OR REPLACE TRIGGER check_user
  AFTER LOGON ON DATABASE
  BEGIN
    check_user;
  EXCEPTION
    WHEN OTHERS THEN
      RAISE_APPLICATION_ERROR
        (-20000, 'Unexpected error: '|| DBMS_Utility.Format_Error_Stack);
 END;
/
```

INSTEAD OF CREATE Triggers

An `INSTEAD OF CREATE` trigger is a `SCHEMA` trigger whose triggering event is a `CREATE` statement. The database fires the trigger instead of executing its triggering statement.

Example 10-22 shows the basic syntax for an `INSTEAD OF CREATE` trigger on the current schema. This trigger fires when the owner of the current schema issues a `CREATE` statement in the current schema.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 10-22 INSTEAD OF CREATE Trigger on Schema

```
CREATE OR REPLACE TRIGGER t
  INSTEAD OF CREATE ON SCHEMA
  BEGIN
    EXECUTE IMMEDIATE 'CREATE TABLE T (n NUMBER, m NUMBER)';
  END;
/
```

Subprograms Invoked by Triggers

Triggers can invoke subprograms written in PL/SQL, C, and Java. The trigger in Example 10-4 invokes a PL/SQL subprogram. The trigger in Example 10-23 invokes a Java subprogram.

A subprogram invoked by a trigger cannot run transaction control statements, because the subprogram runs in the context of the trigger body.

If a trigger invokes an invoker rights (IR) subprogram, then the user who created the trigger, not the user who ran the triggering statement, is considered to be the current user. For information about IR subprograms, see "Invoker's Rights and Definer's Rights (AUTHID Property)".

If a trigger invokes a remote subprogram, and a time stamp or signature mismatch is found during execution of the trigger, then the remote subprogram does not run and the trigger is invalidated.

Example 10-23 Trigger Invokes Java Subprogram

```
CREATE OR REPLACE PROCEDURE Before_delete (Id IN NUMBER, Ename VARCHAR2)
IS LANGUAGE Java
name 'thjvTriggers.beforeDelete (oracle.jdbc.NUMBER, oracle.jdbc.CHAR)';

CREATE OR REPLACE TRIGGER Pre_del_trigger BEFORE DELETE ON Tab
FOR EACH ROW
CALL Before_delete (:OLD.Id, :OLD.Ename)
/
```

The corresponding Java file is `thjvTriggers.java`:

```
import java.sql.*
import java.io.*
import oracle.jdbc.*
import oracle.oracore.*
public class thjvTriggers
{
public static void
beforeDelete (NUMBER old_id, CHAR old_name)
Throws SQLException, CoreException
   {
   Connection conn = JDBCConnection.defaultConnection();
   Statement stmt = conn.CreateStatement();
   String sql = "insert into logtab values
   ("+ old_id.intValue() +", '"+ old_ename.toString() + ", BEFORE DELETE');
   stmt.executeUpdate (sql);
   stmt.close();
   return;
   }
}
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Trigger Compilation, Invalidation, and Recompilation

The `CREATE TRIGGER` statement compiles the trigger and stores its code in the database. If a compilation error occurs, the trigger is still created, but its triggering statement fails, except in these cases:

- The trigger was created in the disabled state.
- The triggering event is `AFTER STARTUP ON DATABASE`.
- The triggering event is either `AFTER LOGON ON DATABASE` or `AFTER LOGON ON SCHEMA`, and someone logs on as `SYSTEM`.

To see trigger compilation errors, either use the `SHOW ERRORS` command in SQL*Plus or Enterprise Manager, or query the static data dictionary view `*_ERRORS` (described in *Oracle Database Reference*).

If a trigger does not compile successfully, then its exception handler cannot run. For an example, see "Remote Exception Handling".

If a trigger references another object, such as a subprogram or package, and that object is modified or dropped, then the trigger becomes invalid. The next time the triggering event occurs, the compiler tries to revalidate the trigger (for details, see *Oracle Database Development Guide*).

> **Note**
>
> Because the `DBMS_AQ` package is used to enqueue a message, dependency between triggers and queues cannot be maintained.

To recompile a trigger manually, use the `ALTER TRIGGER` statement, described in "ALTER TRIGGER Statement".

Exception Handling in Triggers

In most cases, if a trigger runs a statement that raises an exception, and the exception is not handled by an exception handler, then the database rolls back the effects of both the trigger and its triggering statement.

In the following cases, the database rolls back only the effects of the trigger, not the effects of the triggering statement (and logs the error in trace files and the alert log):

- The triggering event is either `AFTER STARTUP ON DATABASE` or `BEFORE SHUTDOWN ON DATABASE`.
- The triggering event is `AFTER LOGON ON DATABASE` and the user has the `ADMINISTER DATABASE TRIGGER` privilege.
- The triggering event is `AFTER LOGON ON SCHEMA` and the user either owns the schema or has the `ALTER ANY TRIGGER` privilege.

In the case of a compound DML trigger, the database rolls back only the effects of the triggering statement, not the effects of the trigger. However, variables declared in the trigger are re-initialized, and any values computed before the triggering statement was rolled back are lost.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Triggers that enforce complex security authorizations or constraints typically raise user-defined exceptions, which are explained in "User-Defined Exceptions".

> **See Also**
>
> PL/SQL Error Handling, for general information about exception handling

Remote Exception Handling

A trigger that accesses a remote database can do remote exception handling only if the remote database is available. If the remote database is unavailable when the local database must compile the trigger, then the local database cannot validate the statement that accesses the remote database, and the compilation fails. If the trigger cannot be compiled, then its exception handler cannot run.

The trigger in Example 10-24 has an `INSERT` statement that accesses a remote database. The trigger also has an exception handler. However, if the remote database is unavailable when the local database tries to compile the trigger, then the compilation fails and the exception handler cannot run.

Example 10-25 shows the workaround for the problem in Example 10-24: Put the remote `INSERT` statement and exception handler in a stored subprogram and have the trigger invoke the stored subprogram. The subprogram is stored in the local database in compiled form, with a validated statement for accessing the remote database. Therefore, when the remote `INSERT` statement fails because the remote database is unavailable, the exception handler in the subprogram can handle it.

Example 10-24 Trigger Cannot Handle Exception if Remote Database is Unavailable

```
CREATE OR REPLACE TRIGGER employees_tr
  AFTER INSERT ON employees
  FOR EACH ROW
BEGIN
  -- When remote database is unavailable, compilation fails here:
  INSERT INTO employees@remote (
    employee_id, first_name, last_name, email, hire_date, job_id
  )
  VALUES (
    99, 'Jane', 'Doe', 'jane.doe@example.com', SYSDATE, 'ST_MAN'
  );
EXCEPTION
  WHEN OTHERS THEN
    INSERT INTO emp_log (Emp_id, Log_date, New_salary, Action)
      VALUES (99, SYSDATE, NULL, 'Could not insert');
    RAISE;
END;
/
```

Example 10-25 Workaround for Example 10-24

```
CREATE OR REPLACE PROCEDURE insert_row_proc AUTHID CURRENT_USER AS
  no_remote_db EXCEPTION;  -- declare exception
  PRAGMA EXCEPTION_INIT (no_remote_db, -20000);
                           -- assign error code to exception
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  INSERT INTO employees@remote (
    employee_id, first_name, last_name, email, hire_date, job_id
  )
  VALUES (
    99, 'Jane', 'Doe', 'jane.doe@example.com', SYSDATE, 'ST_MAN'
  );
EXCEPTION
  WHEN OTHERS THEN
    INSERT INTO emp_log (Emp_id, Log_date, New_salary, Action)
      VALUES (99, SYSDATE, NULL, 'Could not insert row.');

  RAISE_APPLICATION_ERROR (-20000, 'Remote database is unavailable.');
END;
/

CREATE OR REPLACE TRIGGER employees_tr
  AFTER INSERT ON employees
  FOR EACH ROW
BEGIN
  insert_row_proc;
END;
/
```

Trigger Design Guidelines

- Use triggers to ensure that whenever a specific event occurs, any necessary actions are done (regardless of which user or application issues the triggering statement).

  For example, use a trigger to ensure that whenever anyone updates a table, its log file is updated.

- Do not create triggers that duplicate database features.

  For example, do not create a trigger to reject invalid data if you can do the same with constraints (see "How Triggers and Constraints Differ").

- Do not create triggers that depend on the order in which a SQL statement processes rows (which can vary).

  For example, do not assign a value to a global package variable in a row trigger if the current value of the variable depends on the row being processed by the row trigger. If a trigger updates global package variables, initialize those variables in a `BEFORE` statement trigger.

- Use `BEFORE` row triggers to modify the row before writing the row data to disk.

- Use `AFTER` row triggers to obtain the row ID and use it in operations.

  An `AFTER` row trigger fires when the triggering statement results in ORA-02292.

  > **Note**
  >
  > `AFTER` row triggers are slightly more efficient than `BEFORE` row triggers. With `BEFORE` row triggers, affected data blocks are read first for the trigger and then for the triggering statement. With `AFTER` row triggers, affected data blocks are read only for the trigger.

- If the triggering statement of a `BEFORE` row trigger is an `UPDATE` or `DELETE` statement that conflicts with an `UPDATE` statement that is running, then the database does a transparent

Copyright © 1996, 2025, Oracle and/or its affiliates.

ROLLBACK to SAVEPOINT and restarts the triggering statement. The database can do this many times before the triggering statement completes successfully. Each time the database restarts the triggering statement, the trigger fires. The ROLLBACK to SAVEPOINT does not undo changes to package variables that the trigger references. To ensure that there are no unwanted side effects with each restart, make sure that the BEFORE row trigger is idempotent, meaning the trigger should be written so that the result remains the same with each subsequent execution. Any additional work that should not be repeated can be handled in an AFTER row trigger. To detect this situation, you can also include a counter variable in the package.

- Do not create recursive triggers.

  For example, do not create an AFTER UPDATE trigger that issues an UPDATE statement on the table on which the trigger is defined. The trigger fires recursively until it runs out of memory.

- If you create a trigger that includes a statement that accesses a remote database, then put the exception handler for that statement in a stored subprogram and invoke the subprogram from the trigger.

  For more information, see "Remote Exception Handling".

- Use DATABASE triggers judiciously. They fire every time any database user initiates a triggering event.

- If a trigger runs the following statement, the statement returns the owner of the trigger, not the user who is updating the table:

  ```
  SELECT Username FROM USER_USERS;
  ```

- Only committed triggers fire.

  A trigger is committed, implicitly, after the CREATE TRIGGER statement that creates it succeeds. Therefore, the following statement cannot fire the trigger that it creates:

  ```
  CREATE OR REPLACE TRIGGER my_trigger
    AFTER CREATE ON DATABASE
  BEGIN
    NULL;
  END;
  /
  ```

- To allow the modular installation of applications that have triggers on the same tables, create multiple triggers of the same type, rather than a single trigger that runs a sequence of operations.

  Each trigger sees the changes made by the previously fired triggers. Each trigger can see OLD and NEW values.

Trigger Restrictions

In addition to the restrictions that apply to all PL/SQL units (see Table C-1), triggers have these restrictions:

- Trigger Size Restriction
- Trigger LONG and LONG RAW Data Type Restrictions
- Mutating-Table Restriction
- Only an autonomous trigger can run TCL or DDL statements.

  For information about autonomous triggers, see "Autonomous Triggers".

Copyright © 1996, 2025, Oracle and/or its affiliates.

- A trigger cannot invoke a subprogram that runs transaction control statements, because the subprogram runs in the context of the trigger body.

  For more information about subprograms invoked by triggers, see "Subprograms Invoked by Triggers".

- A trigger cannot access a `SERIALLY_REUSABLE` package.

  For information about `SERIALLY_REUSABLE` packages, see "SERIALLY_REUSABLE Packages".

> **See Also**
>
> "Compound DML Trigger Restrictions"

Trigger Size Restriction

The size of the trigger cannot exceed 32K.

If the logic for your trigger requires much more than 60 lines of PL/SQL source text, then put most of the source text in a stored subprogram and invoke the subprogram from the trigger. For information about subprograms invoked by triggers, see "Subprograms Invoked by Triggers".

Trigger LONG and LONG RAW Data Type Restrictions

> **Note**
>
> Oracle supports the `LONG` and `LONG RAW` data types only for backward compatibility with existing applications.
>
> For information about how to migrate columns from `LONG` data types to `LOB` data types, see *Oracle AI Database SecureFiles and Large Objects Developer's Guide*.

In addition to the restrictions that apply to all PL/SQL units (see "LONG and LONG RAW Variables"), triggers have these restrictions:

- A trigger cannot declare a variable of the `LONG` or `LONG RAW` data type.
- A SQL statement in a trigger can reference a `LONG` or `LONG RAW` column only if the column data can be converted to the data type `CHAR` or `VARCHAR2`.
- A trigger cannot use the correlation name `NEW` or `PARENT` with a `LONG` or `LONG RAW` column.

Mutating-Table Restriction

> **Note**
>
> This topic applies only to row-level simple DML triggers.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A **mutating table** is a table that is being modified by a DML statement (possibly by the effects of a `DELETE CASCADE` constraint). (A view being modified by an `INSTEAD OF` trigger is not considered to be mutating.)

The mutating-table restriction prevents the trigger from querying or modifying the table that the triggering statement is modifying. When a row-level trigger encounters a mutating table, ORA-04091 occurs, the effects of the trigger and triggering statement are rolled back, and control returns to the user or application that issued the triggering statement, as Example 10-26 shows.

> ⚠ **Caution**
>
> Oracle Database does not enforce the mutating-table restriction for a trigger that accesses remote nodes, because the database does not support declarative referential constraints between tables on different nodes of a distributed database.
>
> Similarly, the database does not enforce the mutating-table restriction for tables in the same database that are connected by loop-back database links. A loop-back database link makes a local table appear remote by defining an Oracle Net path back to the database that contains the link.

If you must use a trigger to update a mutating table, you can avoid the mutating-table error in either of these ways:

- Use a compound DML trigger (see "Using Compound DML Triggers to Avoid Mutating-Table Error").
- Use a temporary table.

  For example, instead of using one `AFTER` each row trigger that updates the mutating table, use two triggers—an `AFTER` each row trigger that updates the temporary table and an `AFTER` statement trigger that updates the mutating table with the values from the temporary table.

Mutating-Table Restriction Relaxed

As of Oracle Database 8*g* Release 1, a deletion from the parent table causes `BEFORE` and `AFTER` triggers to fire once. Therefore, you can create row-level and statement-level triggers that query and modify the parent and child tables. This allows most foreign key constraint actions to be implemented through their after-row triggers (unless the constraint is self-referential). Update cascade, update set null, update set default, delete set default, inserting a missing parent, and maintaining a count of children can all be implemented easily—see "Triggers for Ensuring Referential Integrity".

However, cascades require care for multiple-row foreign key updates. The trigger cannot miss rows that were changed but not committed by another transaction, because the foreign key constraint guarantees that no matching foreign key rows are locked before the after-row trigger is invoked.

In Example 10-27, the triggering statement updates `p` correctly but causes problems when the trigger updates `f`. First, the triggering statement changes (1) to (2) in `p`, and the trigger updates (1) to (2) in `f`, leaving two rows of value (2) in `f`. Next, the triggering statement updates (2) to (3) in `p`, and the trigger updates both rows of value (2) to (3) in `f`. Finally, the statement updates (3) to (4) in `p`, and the trigger updates all three rows in f from (3) to (4). The relationship between the data items in `p` and `f` is lost.

Copyright © 1996, 2025, Oracle and/or its affiliates.

To avoid this problem, either forbid multiple-row updates to p that change the primary key and reuse existing primary key values, or track updates to foreign key values and modify the trigger to ensure that no row is updated twice.

Example 10-26 Trigger Causes Mutating-Table Error

```
-- Create log table

DROP TABLE log;
CREATE TABLE log (
  emp_id  NUMBER(6),
  l_name  VARCHAR2(25),
  f_name  VARCHAR2(20)
);

-- Create trigger that updates log and then reads employees

CREATE OR REPLACE TRIGGER log_deletions
  AFTER DELETE ON employees
  FOR EACH ROW
DECLARE
  n INTEGER;
BEGIN
  INSERT INTO log VALUES (
    :OLD.employee_id,
    :OLD.last_name,
    :OLD.first_name
  );

  SELECT COUNT(*) INTO n FROM employees;
  DBMS_OUTPUT.PUT_LINE('There are now ' || n || ' employees.');
END;
/

-- Issue triggering statement:

DELETE FROM employees WHERE employee_id = 197;
```

Result:

```
DELETE FROM employees WHERE employee_id = 197
            *
ERROR at line 1:
ORA-04091: table HR.EMPLOYEES is mutating, trigger/function might not see it
ORA-06512: at "HR.LOG_DELETIONS", line 10
ORA-04088: error during execution of trigger 'HR.LOG_DELETIONS'
```

Show that effect of trigger was rolled back:

```
SELECT count(*) FROM log;
```

Result:

```
  COUNT(*)
----------
         0

1 row selected.
```

Show that effect of triggering statement was rolled back:

```
SELECT employee_id, last_name FROM employees WHERE employee_id = 197;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
EMPLOYEE_ID LAST_NAME
----------- -------------------------
        197 Feeney

1 row selected.
```

Example 10-27 Update Cascade

```
DROP TABLE p;
CREATE TABLE p (p1 NUMBER CONSTRAINT pk_p_p1 PRIMARY KEY);
INSERT INTO p VALUES (1);
INSERT INTO p VALUES (2);
INSERT INTO p VALUES (3);

DROP TABLE f;
CREATE TABLE f (f1 NUMBER CONSTRAINT fk_f_f1 REFERENCES p);
INSERT INTO f VALUES (1);
INSERT INTO f VALUES (2);
INSERT INTO f VALUES (3);

CREATE TRIGGER pt
  AFTER UPDATE ON p
  FOR EACH ROW
BEGIN
  UPDATE f SET f1 = :NEW.p1 WHERE f1 = :OLD.p1;
END;
/
```

Query:

```
SELECT * FROM p ORDER BY p1;
```

Result:

```
        P1
----------
         1
         2
         3
```

Query:

```
SELECT * FROM f ORDER BY f1;
```

Result:

```
        F1
----------
         1
         2
         3
```

Issue triggering statement:

```
UPDATE p SET p1 = p1+1;
```

Query:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
SELECT * FROM p ORDER BY p1;
```

Result:

```
        P1
----------
         2
         3
         4
```

Query:

```
SELECT * FROM f ORDER BY f1;
```

Result:

```
        F1
----------
         4
         4
         4
```

Order in Which Triggers Fire

If two or more triggers *with different timing points* are defined for the same statement on the same table, then they fire in this order:

1. All `BEFORE STATEMENT` triggers
2. All `BEFORE EACH ROW` triggers
3. All `AFTER EACH ROW` triggers
4. All `AFTER STATEMENT` triggers

If it is practical, replace the set of individual triggers with different timing points with a single compound trigger that explicitly codes the actions in the order you intend. For information about compound triggers, see "Compound DML Triggers".

If you are creating two or more triggers *with the same timing point*, and the order in which they fire is important, then you can control their firing order using the `FOLLOWS` and `PRECEDES` clauses (see "FOLLOWS | PRECEDES").

If multiple compound triggers are created on a table, then:

- All `BEFORE STATEMENT` sections run at the `BEFORE STATEMENT` timing point, `BEFORE EACH ROW` sections run at the `BEFORE EACH ROW` timing point, and so forth.

  If trigger execution order was specified using the `FOLLOWS` clause, then the `FOLLOWS` clause determines the order of execution of compound trigger sections. If `FOLLOWS` is specified for some but not all triggers, then the order of execution of triggers is guaranteed only for those that are related using the `FOLLOWS` clause.

- All `AFTER STATEMENT` sections run at the `AFTER STATEMENT` timing point, `AFTER EACH ROW` sections run at the `AFTER EACH ROW` timing point, and so forth.

  If trigger execution order was specified using the `PRECEDES` clause, then the `PRECEDES` clause determines the order of execution of compound trigger sections. If `PRECEDES` is specified for some but not all triggers, then the order of execution of triggers is guaranteed only for those that are related using the `PRECEDES` clause.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> `PRECEDES` applies only to reverse crossedition triggers, which are described in *Oracle Database Development Guide*.

The firing of compound triggers can be interleaved with the firing of simple triggers.

When one trigger causes another trigger to fire, the triggers are said to be **cascading**. The database allows up to 32 triggers to cascade simultaneously. To limit the number of trigger cascades, use the initialization parameter `OPEN_CURSORS` (described in *Oracle Database Reference*), because a cursor opens every time a trigger fires.

Trigger Enabling and Disabling

By default, the `CREATE TRIGGER` statement creates a trigger in the enabled state. To create a trigger in the disabled state, specify `DISABLE`. Creating a trigger in the disabled state lets you ensure that it compiles without errors before you enable it.

Some reasons to temporarily disable a trigger are:

- The trigger refers to an unavailable object.
- You must do a large data load, and you want it to proceed quickly without firing triggers.
- You are reloading data.

To enable or disable a single trigger, use this statement:

```
ALTER TRIGGER [schema.]trigger_name { ENABLE | DISABLE };
```

To enable or disable all triggers in all editions created on a specific table, use this statement:

```
ALTER TABLE table_name { ENABLE | DISABLE } ALL TRIGGERS;
```

In both of the preceding statements, *schema* is the name of the schema containing the trigger, and the default is your schema.

> **See Also**
>
> - "ALTER TRIGGER Statement" for more information about the `ALTER TRIGGER` statement
> - *Oracle Database SQL Language Reference* for more information about the `ALTER TABLE` statement

Trigger Changing and Debugging

To change a trigger, you must either replace or re-create it. (The `ALTER TRIGGER` statement only enables, disables, compiles, or renames a trigger.)

To replace a trigger, use the `CREATE TRIGGER` statement with the `OR REPLACE` clause.

To re-create a trigger, first drop it with the `DROP TRIGGER` statement and then create it again with the `CREATE TRIGGER` statement.

Copyright © 1996, 2025, Oracle and/or its affiliates.

To debug a trigger, you can use the facilities available for stored subprograms. For information about these facilities, see *Oracle Database Development Guide*.

> **See Also**
>
> - "CREATE TRIGGER Statement" for more information about the `CREATE TRIGGER` statement
> - "DROP TRIGGER Statement" for more information about the `DROP TRIGGER` statement
> - "ALTER TRIGGER Statement" for more information about the `ALTER TRIGGER` statement

Triggers and Oracle Database Data Transfer Utilities

The Oracle database utilities that transfer data to your database, possibly firing triggers, are:

- **SQL*Loader (`sqlldr`)**

  SQL*Loader loads data from external files into tables of an Oracle database.

  During a SQL*Loader conventional load, `INSERT` triggers fire.

  Before a SQL*Loader direct load, triggers are disabled.

  > **See Also**
  >
  > *Oracle Database Utilities* for more information about SQL*Loader

- **Data Pump Import (`impdp`)**

  Data Pump Import (`impdp`) reads an export dump file set created by Data Pump Export (`expdp`) and writes it to an Oracle database.

  If a table to be imported does not exist on the target database, or if you specify `TABLE_EXISTS_ACTION=REPLACE`, then `impdp` creates and loads the table before creating any triggers, so no triggers fire.

  If a table to be imported exists on the target database, and you specify either `TABLE_EXISTS_ACTION=APPEND` or `TABLE_EXISTS_ACTION=TRUNCATE`, then `impdp` loads rows into the existing table, and `INSERT` triggers created on the table fire.

  > **See Also**
  >
  > *Oracle Database Utilities* for more information about Data Pump Import

- **Original Import (`imp`)**

  Original Import (the original Import utility, `imp`) reads object definitions and table data from dump files created by original Export (the original Export utility, `exp`) and writes them to the target database.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> To import files that original Export created, you must use original Import. In all other cases, Oracle recommends that you use Data Pump Import instead of original Import.

If a table to be imported does not exist on the target database, then `imp` creates and loads the table before creating any triggers, so no triggers fire.

If a table to be imported exists on the target database, then the Import `IGNORE` parameter determines whether triggers fire during import operations. The `IGNORE` parameter specifies whether object creation errors are ignored or not, resulting in the following behavior:

- If `IGNORE=n` (default), then `imp` does not change the table and no triggers fire.
- If `IGNORE=y`, then `imp` loads rows into the existing table, and `INSERT` triggers created on the table fire.

> **See Also**
>
> - *Oracle Database Utilities* for more information about the original Import utility
> - *Oracle Database Utilities* for more information about the original Export utility
> - *Oracle Database Utilities* for more information about `IGNORE`

Triggers for Publishing Events

To use a trigger to publish an event, create a trigger that:

- Has the event as its triggering event
- Invokes the appropriate subprograms in the `DBMS_AQ` package, which provides an interface to Oracle Advanced Queuing (AQ)

  For information about the `DBMS_AQ` package, see *Oracle Database PL/SQL Packages and Types Reference*.

  For information about AQ, see *Oracle Database Advanced Queuing User's Guide*.

By enabling and disabling such triggers, you can turn event notification on and off. For information about enabling and disabling triggers, see "Trigger Enabling and Disabling".

How Triggers Publish Events

When the database detects an event, it fires all enabled triggers that are defined on that event, except:

- Any trigger that is the target of the triggering event.

  For example, a trigger for all `DROP` events does not fire when it is dropped itself.
- Any trigger that was modified, but not committed, in the same transaction as the triggering event.

  For example, if a recursive DDL statement in a system trigger modifies another trigger, then events in the same transaction cannot fire the modified trigger.

Copyright © 1996, 2025, Oracle and/or its affiliates.

When a trigger fires and invokes AQ, AQ publishes the event and passes to the trigger the publication context and specified attributes. The trigger can access the attributes by invoking event attribute functions.

The attributes that a trigger can specify to AQ (by passing them to AQ as `IN` parameters) and then access with event attribute functions depends on the triggering event, which is either a database event or a client event.

> **Note**
>
> - A trigger always behaves like a definer rights (DR) unit. The trigger action of an event runs as the definer of the action (as the definer of the package or function in callouts, or as owner of the trigger in queues). Because the owner of the trigger must have `EXECUTE` privileges on the underlying queues, packages, or subprograms, this action is consistent. For information about DR units, see "Invoker's Rights and Definer's Rights (AUTHID Property)".
> - The database ignores the return status from callback functions for all events. For example, the database does nothing with the return status from a `SHUTDOWN` event.

Topics

- Event Attribute Functions
- Event Attribute Functions for Database Event Triggers
- Event Attribute Functions for Client Event Triggers

Event Attribute Functions

By invoking system-defined event attribute functions in Table 10-5, a trigger can retrieve certain attributes of the triggering event. Not all triggers can invoke all event attribute functions —for details, see "Event Attribute Functions for Database Event Triggers" and "Event Attribute Functions for Client Event Triggers".

> **Note**
>
> - In earlier releases, you had to access these functions through the `SYS` package. Now Oracle recommends accessing them with their public synonyms (the names starting with `ora_` in the first column of Table 10-5).
> - The function parameter `ora_name_list_t` is defined in package `DBMS_STANDARD` as:
>
>   ```
>   TYPE ora_name_list_t IS TABLE OF VARCHAR2(2*(ORA_MAX_NAME_LEN+2)+1);
>   ```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-5 System-Defined Event Attributes

Attribute	Return Type and Value	Example

`ora_client_ip_address`	VARCHAR2: IP address of client in LOGON event when underlying protocol is TCP/IP	`DECLARE`
		`  v_addr VARCHAR2(11);`
		`BEGIN`
		`  IF (ora_sysevent = 'LOGON') THEN`
		`  v_addr := ora_client_ip_address;`
		`  END IF;`
		`END;`
		`/`

`ora_database_name`	VARCHAR2(50): Database name	`DECLARE`
		`  v_db_name VARCHAR2(50);`
		`BEGIN`
		`  v_db_name := ora_database_name;`
		`END;`
		`/`

`ora_des_encrypted_password`	VARCHAR2: DES-encrypted password of user being created or altered	`IF (ora_dict_obj_type = 'USER') THEN`
		`  INSERT INTO event_table`
		`  VALUES (ora_des_encrypted_password);`
		`END IF;`

`ora_dict_obj_name`	VARCHAR2(128): Name of dictionary object on which DDL operation occurred	`INSERT INTO event_table`
		`VALUES ('Changed object is ' ||`
		`  ora_dict_obj_name);`

`ora_dict_obj_name_list ( name_list OUT ora_name_list_t )`	PLS_INTEGER: Number of object names modified in event
	OUT parameter: List of object names modified in event
		`DECLARE`
		`  name_list ora_name_list_t;`
		`  number_modified PLS_INTEGER;`
		`BEGIN`
		`  IF (ora_sysevent='ASSOCIATE STATISTICS') THEN`
		`  number_modified :=`
		`  ora_dict_obj_name_list(name_list);`
		`  END IF;`
		`END;`

`ora_dict_obj_owner`	VARCHAR2(128): Owner of dictionary object on which DDL operation occurred	`INSERT INTO event_table`
		`VALUES ('object owner is' ||`
		`  ora_dict_obj_owner);`

`ora_dict_obj_owner_list ( owner_list OUT ora_name_list_t )`	PLS_INTEGER: Number of owners of objects modified in event
	OUT parameter: List of owners of objects modified in event
		`DECLARE`
		`  owner_list ora_name_list_t;`
		`  number_modified PLS_INTEGER;`
		`BEGIN`
		`  IF (ora_sysevent='ASSOCIATE STATISTICS') THEN`
		`  number_modified :=`
		`  ora_dict_obj_name_list(owner_list);`
		`  END IF;`
		`END;`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-5 (Cont.) System-Defined Event Attributes

Attribute	Return Type and Value	Example

`ora_dict_obj_type`	`VARCHAR2(20)`: Type of dictionary object on which DDL operation occurred	`INSERT INTO event_table`
		`VALUES ('This object is a ' ||`
		`  ora_dict_obj_type);`

`ora_grantee (`
`user_list OUT ora_name_list_t`
`)`
	`PLS_INTEGER`: Number of grantees in grant event
	`OUT` parameter: List of grantees in grant event
		`DECLARE`
		`  user_list ora_name_list_t;`
		`  number_of_grantees PLS_INTEGER;`
		`BEGIN`
		`  IF (ora_sysevent = 'GRANT') THEN`
		`  number_of_grantees :=`
		`  ora_grantee(user_list);`
		`  END IF;`
		`END;`

`ora_instance_num`	`NUMBER`: Instance number	`IF (ora_instance_num = 1) THEN`
		`  INSERT INTO event_table VALUES ('1');`
		`END IF;`

`ora_is_alter_column (`
`column_name IN VARCHAR2`
`)`
	`BOOLEAN`: TRUE if specified column is altered, FALSE otherwise	`IF (ora_sysevent = 'ALTER' AND`
		`  ora_dict_obj_type = 'TABLE') THEN`
		`  alter_column := ora_is_alter_column('C');`
		`END IF;`

`ora_is_creating_nested_table`	`BOOLEAN`: TRUE if current event is creating nested table, FALSE otherwise	`IF (ora_sysevent = 'CREATE' AND`
		`  ora_dict_obj_type = 'TABLE' AND`
		`  ora_is_creating_nested_table) THEN`
		`  INSERT INTO event_table`
		`  VALUES ('A nested table is created');`
		`END IF;`

`ora_is_drop_column (`
`column_name IN VARCHAR2`
`)`
	`BOOLEAN`: TRUE if specified column is dropped, FALSE otherwise	`IF (ora_sysevent = 'ALTER' AND`
		`  ora_dict_obj_type = 'TABLE') THEN`
		`  drop_column := ora_is_drop_column('C');`
		`END IF;`

`ora_is_servererror (`
`error_number IN VARCHAR2`
`)`
	`BOOLEAN`: TRUE if given error is on error stack, FALSE otherwise	`IF ora_is_servererror(error_number) THEN`
		`  INSERT INTO event_table`
		`  VALUES ('Server error!!');`
		`END IF;`

`ora_login_user`	`VARCHAR2(128)`: Login user name	`SELECT ora_login_user FROM DUAL;`

`ora_partition_pos`	`PLS_INTEGER`: In `INSTEAD OF` trigger for `CREATE TABLE`, position in SQL text where you can insert `PARTITION` clause	`-- Retrieve ora_sql_txt into  sql_text variable`
		`v_n := ora_partition_pos;`
		`v_new_stmt := SUBSTR(sql_text,1,v_n - 1)`
		`  || ' ' || my_partition_clause`
		`  || ' ' || SUBSTR(sql_text, v_n));`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-5 (Cont.) System-Defined Event Attributes

Attribute	Return Type and Value	Example

`ora_privilege_list ( privilege_list OUT ora_name_list_t )`	PLS_INTEGER: Number of privileges in grant or revoke event
	OUT parameter: List of privileges granted or revoked in event
		`DECLARE`
		`  privilege_list ora_name_list_t;`
		`  number_of_privileges PLS_INTEGER;`
		`BEGIN`
		`  IF (ora_sysevent = 'GRANT' OR`
		`  ora_sysevent = 'REVOKE') THEN`
		`  number_of_privileges :=`
		`  ora_privilege_list(privilege_list);`
		`  END IF;`
		`END;`

`ora_revokee ( user_list OUT ora_name_list_t )`	PLS_INTEGER: Number of revokees in revoke event
	OUT parameter: List of revokees in event
		`DECLARE`
		`  user_list ora_name_list_t;`
		`  number_of_users PLS_INTEGER;`
		`BEGIN`
		`  IF (ora_sysevent = 'REVOKE') THEN`
		`  number_of_users := ora_revokee(user_list);`
		`  END IF;`
		`END;`

`ora_server_error ( position IN PLS_INTEGER )`	NUMBER: Error code at given position on error stack[1]	`INSERT INTO event_table`
		`VALUES ('top stack error ' ||`
		`  ora_server_error(1));`

`ora_server_error_depth`	PLS_INTEGER: Number of error messages on error stack	`n := ora_server_error_depth;` `-- Use n with functions such as ora_server_error`

`ora_server_error_msg ( position IN PLS_INTEGER )`	VARCHAR2: Error message at given position on error stack[1]	`INSERT INTO event_table`
		`VALUES ('top stack error message' ||`
		`  ora_server_error_msg(1));`

`ora_server_error_num_params ( position IN PLS_INTEGER )`	PLS_INTEGER: Number of strings substituted into error message (using format like %s) at given position on error stack[1]	`n := ora_server_error_num_params(1);`
`ora_server_error_param ( position IN PLS_INTEGER, param IN PLS_INTEGER )`	VARCHAR2: Matching substitution value (%s, %d, and so on) in error message at given position and parameter number[1]	`-- Second %s in "Expected %s, found %s":` `param := ora_server_error_param(1,2);`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-5 (Cont.) System-Defined Event Attributes

Attribute	Return Type and Value	Example

`ora_sql_txt ( sql_text OUT ora_name_list_t )`	`PLS_INTEGER`: Number of elements in PL/SQL table
	`OUT` parameter: SQL text of triggering statement (broken into multiple collection elements if statement is long)
		`CREATE TABLE event_table (col VARCHAR2(2030));`
		
		`DECLARE`
		`  sql_text ora_name_list_t;`
		`  n PLS_INTEGER;`
		`  v_stmt VARCHAR2(2000);`
		`BEGIN`
		`  n := ora_sql_txt(sql_text);`
		
		`  FOR i IN 1..n LOOP`
		`  v_stmt := v_stmt || sql_text(i);`
		`  END LOOP;`
		
		`  INSERT INTO event_table VALUES ('text of`
		`  triggering statement: ' || v_stmt);`
		`END;`

`ora_sysevent`	`VARCHAR2(20)`: Name of triggering event, as given in syntax	`INSERT INTO event_table` `VALUES (ora_sysevent);`

`ora_with_grant_option`	`BOOLEAN`: TRUE if privileges are granted with GRANT option, FALSE otherwise	`IF (ora_sysevent = 'GRANT' AND`
		`  ora_with_grant_option = TRUE) THEN`
		`  INSERT INTO event_table`
		`  VALUES ('with grant option');`
		`END IF;`

`ora_space_error_info ( error_number OUT NUMBER, error_type OUT VARCHAR2, object_owner OUT VARCHAR2, table_space_name OUT VARCHAR2, object_name OUT VARCHAR2, sub_object_name OUT VARCHAR2 )`	`BOOLEAN`: TRUE if error is related to out-of-space condition, FALSE otherwise
	`OUT` parameters: Information about object that caused error
		`IF (ora_space_error_info (`
		`  eno,typ,owner,ts,obj,subobj) = TRUE) THEN`
		`  DBMS_OUTPUT.PUT_LINE('The object '|| obj`
		`  || ' owned by ' || owner ||`
		`  ' has run out of space.');`
		`END IF;`

[1] Position 1 is the top of the stack.

Event Attribute Functions for Database Event Triggers

Table 10-6 summarizes the database event triggers that can invoke event attribute functions. For more information about the triggering events in Table 10-6, see "*database_event*".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-6 Database Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`AFTER STARTUP`	When database is opened.	None allowed	Trigger cannot do database operations.	Starts a separate transaction and commits it after firing the triggers.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`

`BEFORE SHUTDOWN`	Just before server starts shutdown of an instance.
	This lets the cartridge shutdown completely. For nonstandard instance shutdown, this trigger might not fire.
		None allowed	Trigger cannot do database operations.	Starts separate transaction and commits it after firing triggers.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`

`AFTER DB_ROLE_CHANGE`	When database is opened for first time after role change.	None allowed	None	Starts separate transaction and commits it after firing triggers.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`

`AFTER SERVERERROR`	With condition, whenever specified error occurs. Without condition, whenever any error occurs.
	Trigger does not fire for errors listed in "*database_event*".
		`ERRNO = eno`	Depends on error.	Starts separate transaction and commits it after firing triggers.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_server_error`
					`ora_is_servererro r`
					`ora_space_error_i nfo`

Event Attribute Functions for Client Event Triggers

Table 10-7 summarizes the client event triggers that can invoke event attribute functions. For more information about the triggering events in Table 10-7, see "*ddl_event*" and "*database_event*".

> **Note**
>
> If a client event trigger becomes the target of a DDL operation (such as `CREATE OR REPLACE TRIGGER`), then it cannot fire later during the same transaction.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-7 Client Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`BEFORE ALTER`
 	
`AFTER ALTER`
	When catalog object is altered	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_type`
					`ora_dict_obj_name`
					`ora_dict_obj_owner`
					`ora_des_encrypted_password` (for `ALTER USER` events)
					`ora_is_alter_column` (for `ALTER TABLE` events)
					`ora_is_drop_column` (for `ALTER TABLE` events)

`BEFORE DROP`
 	
`AFTER DROP`
	When catalog object is dropped	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_type`
					`ora_dict_obj_name`
					`ora_dict_obj_owner`

`BEFORE ANALYZE`
 	
`AFTER ANALYZE`
	When `ANALYZE` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`

`BEFORE ASSOCIATE STATISTICS`
 	
`AFTER ASSOCIATE STATISTICS`
	When `ASSOCIATE STATISTICS` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`
					`ora_dict_obj_name_list`
					`ora_dict_obj_owner_list`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-7 (Cont.) Client Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`BEFORE AUDIT`
`AFTER AUDIT`
`BEFORE NOAUDIT`
`AFTER NOAUDIT`
	When `AUDIT` or `NOAUDIT` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`

`BEFORE COMMENT`
`AFTER COMMENT`
	When object is commented	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`

`BEFORE CREATE`
`AFTER CREATE`
	When catalog object is created	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_type`
					`ora_dict_obj_name`
					`ora_dict_obj_owner`
					`ora_is_creating_nested_table`
					`(for CREATE TABLE events)`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-7 (Cont.) Client Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`BEFORE DDL`
 	
`AFTER DDL`
	When most SQL DDL statements are issued. Not fired for `ALTER DATABASE`, `CREATE CONTROLFILE`, `CREATE DATABASE`, and DDL issued through the PL/SQL subprogram interface, such as creating an advanced queue.	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`

`BEFORE DISASSOCIATE STATISTICS`
 	
`AFTER DISASSOCIATE STATISTICS`
	When `DISASSOCIATE STATISTICS` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`
					`ora_dict_obj_name_list`
					`ora_dict_obj_owner_list`

`BEFORE GRANT`
 	
`AFTER GRANT`
	When `GRANT` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`
					`ora_grantee`
					`ora_with_grant_option`
					`ora_privilege_list`

`BEFORE LOGOFF`	At start of user logoff	Simple conditions on `UID` and `USER`	DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.	Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-7 (Cont.) Client Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`AFTER LOGON`	After successful user logon	Simple conditions on `UID` and `USER`	DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.	Starts separate transaction and commits it after firing triggers.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_client_ip_address`

`BEFORE RENAME`
 	
`AFTER RENAME`
	When `RENAME` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_owner`
					`ora_dict_obj_type`

`BEFORE REVOKE`
 	
`AFTER REVOKE`
	When `REVOKE` statement is issued	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`
					`ora_revokee`
					`ora_privilege_list`

`AFTER SUSPEND`	After SQL statement is suspended because of out-of-space condition.
	(Trigger must correct condition so statement can be resumed.)
		Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_server_error`
					`ora_is_servererror`
					`ora_space_error_info`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 10-7 (Cont.) Client Event Triggers

Triggering Event	When Trigger Fires	WHEN Conditions	Restrictions	Transaction	Attribute Functions

`BEFORE TRUNCATE`
 	
`AFTER TRUNCATE`
	When object is truncated	Simple conditions on type and name of object, `UID`, and `USER`	Trigger cannot do DDL operations on object that caused event to be generated.
			DDL on other objects is limited to compiling an object, creating a trigger, and creating, altering, and dropping a table.
				Fires triggers in current transaction.	`ora_sysevent`
					`ora_login_user`
					`ora_instance_num`
					`ora_database_name`
					`ora_dict_obj_name`
					`ora_dict_obj_type`
					`ora_dict_obj_owner`

Views for Information About Triggers

The `*_TRIGGERS` static data dictionary views reveal information about triggers. For information about these views, see *Oracle Database Reference*.

Example 10-28 Viewing Information About Triggers

This example creates a trigger and queries the static data dictionary view `USER_TRIGGERS` twice—first to show its type, triggering event, and the name of the table on which it is created, and then to show its body.

```
CREATE OR REPLACE TRIGGER Emp_count
  AFTER DELETE ON employees
DECLARE
  n  INTEGER;
BEGIN
  SELECT COUNT(*) INTO n FROM employees;
  DBMS_OUTPUT.PUT_LINE('There are now ' || n || ' employees.');
END;
/
```

These SQL*Plus commands format the query results.

```
COLUMN Trigger_type FORMAT A15
COLUMN Triggering_event FORMAT A16
COLUMN Table_name FORMAT A11
COLUMN Trigger_body FORMAT A50
SET LONG 9999
```

Query:

```
SELECT Trigger_type, Triggering_event, Table_name
FROM USER_TRIGGERS
WHERE Trigger_name = 'EMP_COUNT';
```

Result:

```
TRIGGER_TYPE    TRIGGERING_EVENT TABLE_NAME
--------------- ---------------- -----------
AFTER STATEMENT DELETE           EMPLOYEES
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Query:

```
SELECT Trigger_body
FROM USER_TRIGGERS
WHERE Trigger_name = 'EMP_COUNT';
```

Result:

```
TRIGGER_BODY
-------------------------------------------------
DECLARE
  n  INTEGER;
BEGIN
  SELECT COUNT(*) INTO n FROM employees;
  DBMS_OUTPUT.PUT_LINE('There are now ' || n || '
employees.');
END;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

11

PL/SQL Packages

This chapter explains how to bundle related PL/SQL code and data into a package, whose contents are available to many applications.

Topics

- What is a Package?
- Reasons to Use Packages
- Package Specification
- Package Body
- Package Instantiation and Initialization
- Package State
- SERIALLY_REUSABLE Packages
- Package Writing Guidelines
- Package Example
- How STANDARD Package Defines the PL/SQL Environment

What is a Package?

A **package** is a schema object that groups logically related PL/SQL types, variables, constants, subprograms, cursors, and exceptions. A package is compiled and stored in the database, where many applications can share its contents.

A package always has a **specification**, which declares the **public items** that can be referenced from outside the package.

If the public items include cursors or subprograms, then the package must also have a **body**. The body must define queries for public cursors and code for public subprograms. The body can also declare and define **private items** that cannot be referenced from outside the package, but are necessary for the internal workings of the package. Finally, the body can have an **initialization part**, whose statements initialize variables and do other one-time setup steps, and an exception-handling part. You can change the body without changing the specification or the references to the public items; therefore, you can think of the package body as a black box.

In either the package specification or package body, you can map a package subprogram to an external Java, JavaScript, or C subprogram by using a **call specification**, which maps the external subprogram name, parameter types, and return type to their SQL counterparts.

The **`AUTHID` clause** of the package specification determines whether the subprograms and cursors in the package run with the privileges of their definer (the default) or invoker, and whether their unqualified references to schema objects are resolved in the schema of the definer or invoker.

The **`ACCESSIBLE BY` clause** of the package specification lets you specify a white list of PL/SQL units that can access the package. You use this clause in situations like these:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- You implement a PL/SQL application as several packages—one package that provides the application programming interface (API) and helper packages to do the work. You want clients to have access to the API, but not to the helper packages. Therefore, you omit the `ACCESSIBLE BY` clause from the API package specification and include it in each helper package specification, where you specify that only the API package can access the helper package.
- You create a utility package to provide services to some, but not all, PL/SQL units in the same schema. To restrict use of the package to the intended units, you list them in the `ACCESSIBLE BY` clause in the package specification.

See Also

- "Package Specification" for more information about the package specification
- "Package Body" for more information about the package body
- "Function Declaration and Definition"
- "Procedure Declaration and Definition"
- "Invoker's Rights and Definer's Rights (AUTHID Property)"

Reasons to Use Packages

Packages support the development and maintenance of reliable, reusable code with the following features:

- **Modularity**

  Packages let you encapsulate logically related types, variables, constants, subprograms, cursors, and exceptions in named PL/SQL modules. You can make each package easy to understand, and make the interfaces between packages simple, clear, and well defined. This practice aids application development.

- **Easier Application Design**

  When designing an application, all you need initially is the interface information in the package specifications. You can code and compile specifications without their bodies. Next, you can compile standalone subprograms that reference the packages. You need not fully define the package bodies until you are ready to complete the application.

- **Hidden Implementation Details**

  Packages let you share your interface information in the package specification, and hide the implementation details in the package body. Hiding the implementation details in the body has these advantages:

  – You can change the implementation details without affecting the application interface.

  – Application users cannot develop code that depends on implementation details that you might want to change.

- **Added Functionality**

  Package public variables and cursors can persist for the life of a session. They can be shared by all subprograms that run in the environment. They let you maintain data across transactions without storing it in the database. (For the situations in which package public variables and cursors do not persist for the life of a session, see "Package State".)

- **Better Performance**

Copyright © 1996, 2025, Oracle and/or its affiliates.

The first time you invoke a package subprogram, Oracle Database loads the whole package into memory. Subsequent invocations of other subprograms in same the package require no disk I/O.

Packages prevent cascading dependencies and unnecessary recompiling. For example, if you change the body of a package function, Oracle Database does not recompile other subprograms that invoke the function, because these subprograms depend only on the parameters and return value that are declared in the specification.

- **Easier to Grant Roles**

  You can grant roles on the package, instead of granting roles on each object in the package.

> **Note**
>
> You cannot reference host variables from inside a package.

Package Specification

A **package specification** declares **public items**. The scope of a public item is the schema of the package. A public item is visible everywhere in the schema. To reference a public item that is in scope but not visible, qualify it with the package name. (For information about scope, visibility, and qualification, see "Scope and Visibility of Identifiers".)

Each public item declaration has all information needed to use the item. For example, suppose that a package specification declares the function `factorial` this way:

```
FUNCTION factorial (n INTEGER) RETURN INTEGER; -- returns n!
```

The declaration shows that `factorial` needs one argument of type `INTEGER` and returns a value of type `INTEGER`, which is invokers must know to invoke `factorial`. Invokers need not know how `factorial` is implemented (for example, whether it is iterative or recursive).

> **Note**
>
> To restrict the use of your package to specified PL/SQL units, include the `ACCESSIBLE BY` clause in the package specification.

Topics

- Appropriate Public Items
- Creating Package Specifications

Appropriate Public Items

Appropriate public items are:

- Types, variables, constants, subprograms, cursors, and exceptions used by multiple subprograms

Copyright © 1996, 2025, Oracle and/or its affiliates.

A type defined in a package specification is either a PL/SQL user-defined subtype (described in "User-Defined PL/SQL Subtypes") or a PL/SQL composite type (described in PL/SQL Collections and Records).

> **Note**
>
> A PL/SQL composite type defined in a package specification is incompatible with an identically defined local or standalone type (see Example 6-37, Example 6-38, and Example 6-44).

- Associative array types of standalone subprogram parameters

  You cannot declare an associative array type at schema level. Therefore, to pass an associative array variable as a parameter to a standalone subprogram, you must declare the type of that variable in a package specification. Doing so makes the type available to both the invoked subprogram (which declares a formal parameter of that type) and to the invoking subprogram or anonymous block (which declares a variable of that type). See Example 11-2.
- Variables that must remain available between subprogram invocations in the same session
- Subprograms that read and write public variables ("get" and "set" subprograms)

  Provide these subprograms to discourage package users from reading and writing public variables directly.
- Subprograms that invoke each other

  You need not worry about compilation order for package subprograms, as you must for standalone subprograms that invoke each other.
- Overloaded subprograms

  Overloaded subprograms are variations of the same subprogram. That is, they have the same name but different formal parameters. For more information about them, see "Overloaded Subprograms".

> **Note**
>
> You cannot reference remote package public variables, even indirectly. For example, if a subprogram refers to a package public variable, you cannot invoke the subprogram through a database link.

Creating Package Specifications

To create a package specification, use the "CREATE PACKAGE Statement".

Because the package specifications in Example 11-1 and Example 11-2 do not declare cursors or subprograms, the packages `trans_data` and `aa_pkg` do not need bodies.

Example 11-1 Simple Package Specification

In this example, the specification for the package `trans_data` declares two public types and three public variables.

```
CREATE OR REPLACE PACKAGE trans_data AUTHID DEFINER AS
  TYPE TimeRec IS RECORD (
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    minutes SMALLINT,
    hours   SMALLINT);
  TYPE TransRec IS RECORD (
    category VARCHAR2(10),
    account  INT,
    amount   REAL,
    time_of  TimeRec);
  minimum_balance     CONSTANT REAL := 10.00;
  number_processed    INT;
  insufficient_funds  EXCEPTION;
  PRAGMA EXCEPTION_INIT(insufficient_funds, -4097);
END trans_data;
/
```

Example 11-2 Passing Associative Array to Standalone Subprogram

In this example, the specification for the package `aa_pkg` declares an associative array type, `aa_type`. Then, the standalone procedure `print_aa` declares a formal parameter of type `aa_type`. Next, the anonymous block declares a variable of type `aa_type`, populates it, and passes it to the procedure `print_aa`, which prints it.

```
CREATE OR REPLACE PACKAGE aa_pkg AUTHID DEFINER IS
  TYPE aa_type IS TABLE OF INTEGER INDEX BY VARCHAR2(15);
END;
/
CREATE OR REPLACE PROCEDURE print_aa (
  aa aa_pkg.aa_type
) AUTHID DEFINER IS
  i  VARCHAR2(15);
BEGIN
  i := aa.FIRST;

  WHILE i IS NOT NULL LOOP
    DBMS_OUTPUT.PUT_LINE (aa(i) || '  ' || i);
    i := aa.NEXT(i);
  END LOOP;
END;
/
DECLARE
  aa_var  aa_pkg.aa_type;
BEGIN
  aa_var('zero') := 0;
  aa_var('one') := 1;
  aa_var('two') := 2;
  print_aa(aa_var);
END;
/
```

Result:

```
1  one
2  two
0  zero
```

Package Body

If a package specification declares cursors or subprograms, then a package body is required; otherwise, it is optional. The package body and package specification must be in the same schema.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Every cursor or subprogram declaration in the package specification must have a corresponding definition in the package body. The headings of corresponding subprogram declarations and definitions must match word for word, except for white space.

To create a package body, use the "CREATE PACKAGE BODY Statement".

The cursors and subprograms declared in the package specification and defined in the package body are public items that can be referenced from outside the package. The package body can also declare and define **private items** that cannot be referenced from outside the package, but are necessary for the internal workings of the package.

Finally, the body can have an **initialization part**, whose statements initialize public variables and do other one-time setup steps. The initialization part runs only the first time the package is referenced. The initialization part can include an exception handler.

You can change the package body without changing the specification or the references to the public items.

Example 11-3 Matching Package Specification and Body

In this example, the headings of the corresponding subprogram declaration and definition do not match word for word; therefore, PL/SQL raises an exception, even though `employees.hire_date%TYPE` is `DATE`.

```
CREATE PACKAGE emp_bonus AS
  PROCEDURE calc_bonus (date_hired employees.hire_date%TYPE);
END emp_bonus;
/
CREATE PACKAGE BODY emp_bonus AS
  -- DATE does not match employees.hire_date%TYPE
  PROCEDURE calc_bonus (date_hired DATE) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE
      ('Employees hired on ' || date_hired || ' get bonus.');
  END;
END emp_bonus;
/
```

Result:

```
Warning: Package Body created with compilation errors.
```

Show errors (in SQL*Plus):

```
SHOW ERRORS
```

Result:

```
Errors for PACKAGE BODY EMP_BONUS:

LINE/COL ERROR
-------- -----------------------------------------------------------------
2/13     PLS-00323: subprogram or cursor 'CALC_BONUS' is declared in a
         package specification and must be defined in the package body
```

Correct problem:

```
CREATE OR REPLACE PACKAGE BODY emp_bonus AS
  PROCEDURE calc_bonus
    (date_hired employees.hire_date%TYPE) IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE
      ('Employees hired on ' || date_hired || ' get bonus.');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END;
END emp_bonus;
/
```

Result:

```
Package body created.
```

Package Instantiation and Initialization

When a session references a package item, Oracle Database instantiates the package for that session. Every session that references a package has its own instantiation of that package.

When Oracle Database instantiates a package, it initializes it. Initialization includes whichever of the following are applicable:

- Assigning initial values to public constants
- Assigning initial values to public variables whose declarations specify them
- Executing the initialization part of the package body

Package State

The values of the variables, constants, and cursors that a package declares (in either its specification or body) comprise its **package state**.

If a PL/SQL package declares at least one variable, constant, or cursor, then the package is **stateful**; otherwise, it is **stateless**.

Each session that references a package item has its own instantiation of that package. If the package is stateful, the instantiation includes its state.

The package state persists for the life of a session, except in these situations:

- The package is `SERIALLY_REUSABLE`.
- The package body is recompiled.

  If the body of an instantiated, stateful package is recompiled (either explicitly, with the "ALTER PACKAGE Statement", or implicitly), the next invocation of a subprogram in the package causes Oracle Database to discard the existing package state and raise the exception ORA-04068.

  After PL/SQL raises the exception, a reference to the package causes Oracle Database to re-instantiate the package, which re-initializes it. Therefore, previous changes to the package state are lost.
- Any of the session's instantiated packages are invalidated and revalidated.

  All of a session's package instantiations (including package states) can be lost if any of the session's instantiated packages are invalidated and revalidated.

Oracle Database treats a package as stateless if its state is constant for the life of a session (or longer). This is the case for a package whose items are all compile-time constants.

A **compile-time constant** is a constant whose value the PL/SQL compiler can determine at compilation time. A constant whose initial value is a literal is always a compile-time constant. A constant whose initial value is not a literal, but which the optimizer reduces to a literal, is also a compile-time constant. Whether the PL/SQL optimizer can reduce a nonliteral expression to a literal depends on optimization level. Therefore, a package that is stateless when compiled at one optimization level might be stateful when compiled at a different optimization level.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Starting with Oracle Database 19c, Release Update 19.23, the initialization parameter `SESSION_EXIT_ON_PACKAGE_STATE_ERROR` allows you to specify behavior in the event package state is invalidated. When a stateful PL/SQL package undergoes modification, the sessions that have an active instantiation of the package receive the following error when they attempt to run it:

```
ORA-04068: existing state of package has been discarded
```

When `SESSION_EXIT_ON_PACKAGE_STATE_ERROR` is set to `TRUE`, the session immediately exits instead of just raising ORA-04068. This can be advantageous because many applications are better equipped to handle a session being discarded, simplifying recovery.

See Also

- "SERIALLY_REUSABLE Packages"
- "Package Instantiation and Initialization" for information about initialization
- *Oracle Database Development Guide* for information about invalidation and revalidation of schema objects
- "PL/SQL Optimizer" for information about the optimizer
- *Oracle AI Database Reference* for more information about `SESSION_EXIT_ON_PACKAGE_STATE_ERROR`

SERIALLY_REUSABLE Packages

`SERIALLY_REUSABLE` packages let you design applications that manage memory better for scalability.

If a package is not `SERIALLY_REUSABLE`, its package state is stored in the user global area (UGA) for each user. Therefore, the amount of UGA memory needed increases linearly with the number of users, limiting scalability. The package state can persist for the life of a session, locking UGA memory until the session ends. In some applications, such as Oracle Office, a typical session lasts several days.

If a package is `SERIALLY_REUSABLE`, its package state is stored in a work area in a small pool in the system global area (SGA). The package state persists only for the life of a server call. After the server call, the work area returns to the pool. If a subsequent server call references the package, then Oracle Database reuses an instantiation from the pool. Reusing an instantiation re-initializes it; therefore, changes made to the package state in previous server calls are invisible. (For information about initialization, see "Package Instantiation and Initialization".)

Note

Trying to access a `SERIALLY_REUSABLE` package from a database trigger, or from a PL/SQL subprogram invoked by a SQL statement, raises an error.

Topics

- Creating SERIALLY_REUSABLE Packages

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SERIALLY_REUSABLE Package Work Unit
- Explicit Cursors in SERIALLY_REUSABLE Packages

Creating SERIALLY_REUSABLE Packages

To create a SERIALLY_REUSABLE package, include the SERIALLY_REUSABLE pragma in the package specification and, if it exists, the package body.

Example 11-4 creates two very simple SERIALLY_REUSABLE packages, one with only a specification, and one with both a specification and a body.

> **See Also**
>
> "SERIALLY_REUSABLE Pragma"

Example 11-4 Creating SERIALLY_REUSABLE Packages

```
-- Create bodiless SERIALLY_REUSABLE package:

CREATE OR REPLACE PACKAGE bodiless_pkg AUTHID DEFINER IS
  PRAGMA SERIALLY_REUSABLE;
  n NUMBER := 5;
END;
/

-- Create SERIALLY_REUSABLE package with specification and body:

CREATE OR REPLACE PACKAGE pkg AUTHID DEFINER IS
  PRAGMA SERIALLY_REUSABLE;
  n NUMBER := 5;
END;
/

CREATE OR REPLACE PACKAGE BODY pkg IS
  PRAGMA SERIALLY_REUSABLE;
BEGIN
  n := 5;
END;
/
```

SERIALLY_REUSABLE Package Work Unit

For a SERIALLY_REUSABLE package, the work unit is a server call.

You must use its public variables only within the work unit.

> **Note**
>
> If you make a mistake and depend on the value of a public variable that was set in a previous work unit, then your program can fail. PL/SQL cannot check for such cases.

After the work unit (server call) of a SERIALLY_REUSABLE package completes, Oracle Database does the following:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Closes any open cursors.
- Frees some nonreusable memory (for example, memory for collection and long VARCHAR2 variables)
- Returns the package instantiation to the pool of reusable instantiations kept for this package.

Example 11-5 Effect of SERIALLY_REUSABLE Pragma

In this example, the bodiless packages pkg and sr_pkg are the same, except that sr_pkg is SERIALLY_REUSABLE and pkg is not. Each package declares public variable n with initial value 5. Then, an anonymous block changes the value of each variable to 10. Next, another anonymous block prints the value of each variable. The value of pkg.n is still 10, because the state of pkg persists for the life of the session. The value of sr_pkg.n is 5, because the state of sr_pkg persists only for the life of the server call.

```
CREATE OR REPLACE PACKAGE pkg IS
  n NUMBER := 5;
END pkg;
/

CREATE OR REPLACE PACKAGE sr_pkg IS
  PRAGMA SERIALLY_REUSABLE;
  n NUMBER := 5;
END sr_pkg;
/

BEGIN
  pkg.n := 10;
  sr_pkg.n := 10;
END;
/

BEGIN
  DBMS_OUTPUT.PUT_LINE('pkg.n: ' || pkg.n);
  DBMS_OUTPUT.PUT_LINE('sr_pkg.n: ' || sr_pkg.n);
END;
/
```

Result:

```
pkg.n: 10
sr_pkg.n: 5
```

Explicit Cursors in SERIALLY_REUSABLE Packages

An explicit cursor in a SERIALLY_REUSABLE package remains open until either you close it or its work unit (server call) ends. To re-open the cursor, you must make a new server call. A server call can be different from a subprogram invocation, as Example 11-6 shows.

In contrast, an explicit cursor in a package that is not SERIALLY_REUSABLE remains open until you either close it or disconnect from the session.

Example 11-6 Cursor in SERIALLY_REUSABLE Package Open at Call Boundary

```
DROP TABLE people;
CREATE TABLE people (name VARCHAR2(20));

INSERT INTO people (name) VALUES ('John Smith');
INSERT INTO people (name) VALUES ('Mary Jones');
INSERT INTO people (name) VALUES ('Joe Brown');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
INSERT INTO people (name) VALUES ('Jane White');

CREATE OR REPLACE PACKAGE sr_pkg IS
  PRAGMA SERIALLY_REUSABLE;
  CURSOR c IS SELECT name FROM people;
END sr_pkg;
/

CREATE OR REPLACE PROCEDURE fetch_from_cursor IS
  v_name  people.name%TYPE;
BEGIN
  IF sr_pkg.c%ISOPEN THEN
    DBMS_OUTPUT.PUT_LINE('Cursor is open.');
  ELSE
    DBMS_OUTPUT.PUT_LINE('Cursor is closed; opening now.');
    OPEN sr_pkg.c;
  END IF;

  FETCH sr_pkg.c INTO v_name;
  DBMS_OUTPUT.PUT_LINE('Fetched: ' || v_name);

  FETCH sr_pkg.c INTO v_name;
    DBMS_OUTPUT.PUT_LINE('Fetched: ' || v_name);
  END fetch_from_cursor;
/
```

First call to server:

```
BEGIN
  fetch_from_cursor;
  fetch_from_cursor;
END;
/
```

Result:

```
Cursor is closed; opening now.
Fetched: John Smith
Fetched: Mary Jones
Cursor is open.
Fetched: Joe Brown
Fetched: Jane White
```

New call to server:

```
BEGIN
  fetch_from_cursor;
  fetch_from_cursor;
END;
/
```

Result:

```
Cursor is closed; opening now.
Fetched: John Smith
Fetched: Mary Jones
Cursor is open.
Fetched: Joe Brown
Fetched: Jane White
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Package Writing Guidelines

- Become familiar with the packages that Oracle Database supplies, and avoid writing packages that duplicate their features.

  For more information about the packages that Oracle Database supplies, see *Oracle Database PL/SQL Packages and Types Reference*.

- Keep your packages general so that future applications can reuse them.
- Design and define the package specifications before the package bodies.
- In package specifications, declare only items that must be visible to invoking programs.

  This practice prevents other developers from building unsafe dependencies on your implementation details and reduces the need for recompilation.

  If you change the package specification, you must recompile any subprograms that invoke the public subprograms of the package. If you change only the package body, you need not recompile those subprograms.

- Declare public cursors in package specifications and define them in package bodies, as in Example 11-7.

  This practice lets you hide cursors' queries from package users and change them without changing cursor declarations.

- Assign initial values in the initialization part of the package body instead of in declarations.

  This practice has these advantages:

  – The code for computing the initial values can be more complex and better documented.

  – If computing an initial value raises an exception, the initialization part can handle it with its own exception handler.

- If you implement a database application as several PL/SQL packages—one package that provides the API and helper packages to do the work, then make the helper packages available only to the API package, as in Example 11-8.

In Example 11-7, the declaration and definition of the cursor `c1` are in the specification and body, respectively, of the package `emp_stuff`. The cursor declaration specifies only the data type of the return value, not the query, which appears in the cursor definition (for complete syntax and semantics, see "Explicit Cursor Declaration and Definition").

Example 11-8 creates an API package and a helper package. Because of the `ACCESSIBLE BY` clause in the helper package specification, only the API package can access the helper package.

Example 11-7 Separating Cursor Declaration and Definition in Package

```
CREATE PACKAGE emp_stuff AS
  CURSOR c1 RETURN employees%ROWTYPE;  -- Declare cursor
END emp_stuff;
/
CREATE PACKAGE BODY emp_stuff AS
  CURSOR c1 RETURN employees%ROWTYPE IS
    SELECT * FROM employees WHERE salary > 2500;  -- Define cursor
END emp_stuff;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 11-8 ACCESSIBLE BY Clause

```
CREATE OR REPLACE PACKAGE helper
  AUTHID DEFINER
  ACCESSIBLE BY (api)
IS
  PROCEDURE h1;
  PROCEDURE h2;
END;
/

CREATE OR REPLACE PACKAGE BODY helper
IS
  PROCEDURE h1 IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Helper procedure h1');
  END;

  PROCEDURE h2 IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Helper procedure h2');
  END;
END;
/

CREATE OR REPLACE PACKAGE api
  AUTHID DEFINER
IS
  PROCEDURE p1;
  PROCEDURE p2;
END;
/

CREATE OR REPLACE PACKAGE BODY api
IS
  PROCEDURE p1 IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('API procedure p1');
    helper.h1;
  END;

  PROCEDURE p2 IS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('API procedure p2');
    helper.h2;
  END;
END;
/
```

Invoke procedures in API package:

```
BEGIN
  api.p1;
  api.p2;
END;
/
```

Result:

```
API procedure p1
Helper procedure h1
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
API procedure p2
Helper procedure h2
```

Invoke a procedure in helper package:

```
BEGIN
  helper.h1;
END;
/
```

Result:

```
SQL> BEGIN
  2    helper.h1;
  3  END;
  4  /
  helper.h1;
  *
ERROR at line 2:
ORA-06550: line 2, column 3:
PLS-00904: insufficient privilege to access object HELPER
ORA-06550: line 2, column 3:
PL/SQL: Statement ignored
```

Package Example

Example 11-9 creates a table, `log`, and a package, `emp_admin`, and then invokes package subprograms from an anonymous block. The package has both specification and body.

The specification declares a public type, cursor, and exception, and three public subprograms. One public subprogram is overloaded (for information about overloaded subprograms, see "Overloaded Subprograms").

The body declares a private variable, defines the public cursor and subprograms that the specification declares, declares and defines a private function, and has an initialization part.

The initialization part (which runs only the first time the anonymous block references the package) inserts one row into the table `log` and initializes the private variable `number_hired` to zero. Every time the package procedure `hire_employee` is invoked, it updates the private variable `number_hired`.

Example 11-9 Creating emp_admin Package

```
-- Log to track changes (not part of package):

DROP TABLE log;
CREATE TABLE log (
  date_of_action  DATE,
  user_id         VARCHAR2(20),
  package_name    VARCHAR2(30)
);

-- Package specification:

CREATE OR REPLACE PACKAGE emp_admin AUTHID DEFINER AS
  -- Declare public type, cursor, and exception:
  TYPE EmpRecTyp IS RECORD (emp_id NUMBER, sal NUMBER);
  CURSOR desc_salary RETURN EmpRecTyp;
  invalid_salary EXCEPTION;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  -- Declare public subprograms:

  FUNCTION hire_employee (
    last_name       VARCHAR2,
    first_name      VARCHAR2,
    email           VARCHAR2,
    phone_number    VARCHAR2,
    job_id          VARCHAR2,
    salary          NUMBER,
    commission_pct  NUMBER,
    manager_id      NUMBER,
    department_id   NUMBER
  ) RETURN NUMBER;

  -- Overload preceding public subprogram:
  PROCEDURE fire_employee (emp_id NUMBER);
  PROCEDURE fire_employee (emp_email VARCHAR2);

  PROCEDURE raise_salary (emp_id NUMBER, amount NUMBER);
  FUNCTION nth_highest_salary (n NUMBER) RETURN EmpRecTyp;
END emp_admin;
/
-- Package body:

CREATE OR REPLACE PACKAGE BODY emp_admin AS
  number_hired  NUMBER;  -- private variable, visible only in this package

  -- Define cursor declared in package specification:

  CURSOR desc_salary RETURN EmpRecTyp IS
    SELECT employee_id, salary
    FROM employees
    ORDER BY salary DESC;

  -- Define subprograms declared in package specification:

  FUNCTION hire_employee (
    last_name       VARCHAR2,
    first_name      VARCHAR2,
    email           VARCHAR2,
    phone_number    VARCHAR2,
    job_id          VARCHAR2,
    salary          NUMBER,
    commission_pct  NUMBER,
    manager_id      NUMBER,
    department_id   NUMBER
  ) RETURN NUMBER
  IS
    new_emp_id NUMBER;
  BEGIN
    new_emp_id := employees_seq.NEXTVAL;
    INSERT INTO employees (
      employee_id,
      last_name,
      first_name,
      email,
      phone_number,
      hire_date,
      job_id,
      salary,
      commission_pct,
      manager_id,
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    department_id
  )
  VALUES (
    new_emp_id,
    hire_employee.last_name,
    hire_employee.first_name,
    hire_employee.email,
    hire_employee.phone_number,
    SYSDATE,
    hire_employee.job_id,
    hire_employee.salary,
    hire_employee.commission_pct,
    hire_employee.manager_id,
    hire_employee.department_id
  );
  number_hired := number_hired + 1;
  DBMS_OUTPUT.PUT_LINE('The number of employees hired is '
                       || TO_CHAR(number_hired) );
  RETURN new_emp_id;
END hire_employee;

PROCEDURE fire_employee (emp_id NUMBER) IS
BEGIN
  DELETE FROM employees WHERE employee_id = emp_id;
END fire_employee;

PROCEDURE fire_employee (emp_email VARCHAR2) IS
BEGIN
  DELETE FROM employees WHERE email = emp_email;
END fire_employee;

-- Define private function, available only inside package:

FUNCTION sal_ok (
  jobid VARCHAR2,
  sal NUMBER
) RETURN BOOLEAN
IS
  min_sal NUMBER;
  max_sal NUMBER;
BEGIN
  SELECT MIN(salary), MAX(salary)
  INTO min_sal, max_sal
  FROM employees
  WHERE job_id = jobid;

  RETURN (sal >= min_sal) AND (sal <= max_sal);
END sal_ok;

PROCEDURE raise_salary (
  emp_id NUMBER,
  amount NUMBER
)
IS
  sal NUMBER(8,2);
  jobid VARCHAR2(10);
BEGIN
  SELECT job_id, salary INTO jobid, sal
  FROM employees
  WHERE employee_id = emp_id;

  IF sal_ok(jobid, sal + amount) THEN  -- Invoke private function
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      UPDATE employees
      SET salary = salary + amount
      WHERE employee_id = emp_id;
    ELSE
      RAISE invalid_salary;
    END IF;
  EXCEPTION
    WHEN invalid_salary THEN
      DBMS_OUTPUT.PUT_LINE ('The salary is out of the specified range.');
  END raise_salary;

  FUNCTION nth_highest_salary (
    n NUMBER
  ) RETURN EmpRecTyp
  IS
    emp_rec  EmpRecTyp;
  BEGIN
    OPEN desc_salary;
    FOR i IN 1..n LOOP
      FETCH desc_salary INTO emp_rec;
    END LOOP;
    CLOSE desc_salary;
    RETURN emp_rec;
  END nth_highest_salary;

BEGIN  -- initialization part of package body
   INSERT INTO log (date_of_action, user_id, package_name)
   VALUES (SYSDATE, USER, 'EMP_ADMIN');
   number_hired := 0;
END emp_admin;
/
-- Invoke packages subprograms in anonymous block:

DECLARE
  new_emp_id NUMBER(6);
BEGIN
  new_emp_id := emp_admin.hire_employee (
    'Belden',
    'Enrique',
    'EBELDEN',
    '555.111.2222',
    'ST_CLERK',
    2500,
    .1,
    101,
    110
  );
  DBMS_OUTPUT.PUT_LINE ('The employee id is ' || TO_CHAR(new_emp_id));
  emp_admin.raise_salary (new_emp_id, 100);

  DBMS_OUTPUT.PUT_LINE (
    'The 10th highest salary is '||
    TO_CHAR (emp_admin.nth_highest_salary(10).sal) ||
             ', belonging to employee: ' ||
             TO_CHAR (emp_admin.nth_highest_salary(10).emp_id)
  );

  emp_admin.fire_employee(new_emp_id);
  -- You can also delete the newly added employee as follows:
  -- emp_admin.fire_employee('EBELDEN');
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result is similar to:

```
The number of employees hired is 1
The employee id is 210
The 10th highest salary is 11500, belonging to employee: 168
```

How STANDARD Package Defines the PL/SQL Environment

A package named `STANDARD` defines the PL/SQL environment. The package specification declares public types, variables, exceptions, subprograms, which are available automatically to PL/SQL programs. For example, package `STANDARD` declares function `ABS`, which returns the absolute value of its argument, as follows:

```
FUNCTION ABS (n NUMBER) RETURN NUMBER;
```

The contents of package `STANDARD` are directly visible to applications. You need not qualify references to its contents by prefixing the package name. For example, you might invoke `ABS` from a database trigger, stored subprogram, Oracle tool, or 3GL application, as follows:

```
abs_diff := ABS(x - y);
```

If you declare your own version of `ABS`, your local declaration overrides the public declaration. You can still invoke the SQL function by specifying its full name:

```
abs_diff := STANDARD.ABS(x - y);
```

Most SQL functions are overloaded. For example, package `STANDARD` contains these declarations:

```
FUNCTION TO_CHAR (right DATE) RETURN VARCHAR2;
FUNCTION TO_CHAR (left NUMBER) RETURN VARCHAR2;
FUNCTION TO_CHAR (left DATE, right VARCHAR2) RETURN VARCHAR2;
FUNCTION TO_CHAR (left NUMBER, right VARCHAR2) RETURN VARCHAR2;
```

PL/SQL resolves an invocation of `TO_CHAR` by matching the number and data types of the formal and actual parameters.

Copyright © 1996, 2025, Oracle and/or its affiliates.

12

PL/SQL Error Handling

This chapter explains how to handle PL/SQL compile-time warnings and PL/SQL runtime errors. The latter are called **exceptions**.

> **Note**
>
> The language of warning and error messages depends on the `NLS_LANGUAGE` parameter. For information about this parameter, see *Oracle Database Globalization Support Guide*.

Topics

- Compile-Time Warnings
- Overview of Exception Handling
- Internally Defined Exceptions
- Predefined Exceptions
- User-Defined Exceptions
- Redeclared Predefined Exceptions
- Raising Exceptions Explicitly
- Exception Propagation
- Unhandled Exceptions
- Retrieving Error Code and Error Message
- Continuing Execution After Handling Exceptions
- Retrying Transactions After Handling Exceptions
- Handling Errors in Distributed Queries

> **See Also**
>
> - "Exception Handling in Triggers"
> - "Handling FORALL Exceptions After FORALL Statement Completes"

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Tip**
>
> If you have problems creating or running PL/SQL code, check the Oracle Database trace files. The `DIAGNOSTIC_DEST` initialization parameter specifies the current location of the trace files. You can find the value of this parameter by issuing `SHOW PARAMETER DIAGNOSTIC_DEST` or query the `V$DIAG_INFO` view. For more information about diagnostic data, see *Oracle Database Administrator's Guide*.

Compile-Time Warnings

While compiling stored PL/SQL units, the PL/SQL compiler generates warnings for conditions that are not serious enough to cause errors and prevent compilation—for example, using a deprecated PL/SQL feature.

To see warnings (and errors) generated during compilation, either query the static data dictionary view `*_ERRORS` or, in the SQL*Plus environment, use the command `SHOW ERRORS`.

The message code of a PL/SQL warning has the form PLW-*nnnnn*.

Table 12-1 Compile-Time Warning Categories

Category	Description	Example
`SEVERE`	Condition might cause unexpected action or wrong results.	Aliasing problems with parameters
`PERFORMANCE`	Condition might cause performance problems.	Passing a `VARCHAR2` value to a `NUMBER` column in an `INSERT` statement
`INFORMATIONAL`	Condition does not affect performance or correctness, but you might want to change it to make the code more maintainable.	Code that can never run

By setting the compilation parameter `PLSQL_WARNINGS`, you can:

- Enable and disable all warnings, one or more categories of warnings, or specific warnings
- Treat specific warnings as errors (so that those conditions must be corrected before you can compile the PL/SQL unit)

You can set the value of `PLSQL_WARNINGS` for:

- Your Oracle database instance

  Use the `ALTER SYSTEM` statement, described in *Oracle Database SQL Language Reference*.
- Your session

  Use the `ALTER SESSION` statement, described in *Oracle Database SQL Language Reference*.
- A stored PL/SQL unit

  Use an `ALTER` statement from "ALTER Statements" with its *`compiler_parameters_clause`*.

In any of the preceding `ALTER` statements, you set the value of `PLSQL_WARNINGS` with this syntax:

```
PLSQL_WARNINGS = 'value_clause' [, 'value_clause' ] ...
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

For the syntax of *value_clause*, see *Oracle Database Reference*.

To display the current value of PLSQL_WARNINGS, query the static data dictionary view ALL_PLSQL_OBJECT_SETTINGS.

> **See Also**
>
> - *Oracle Database Reference* for more information about the static data dictionary view ALL_PLSQL_OBJECT_SETTINGS
> - *Oracle Database Error Messages Reference* for the message codes of all PL/SQL warnings
> - *Oracle Database Reference* for more information about the static data dictionary view *_ERRORS
> - "PL/SQL Units and Compilation Parameters" for more information about PL/SQL units and compiler parameters

Example 12-1 Setting Value of PLSQL_WARNINGS Compilation Parameter

This example shows several ALTER statements that set the value of PLSQL_WARNINGS.

For the session, enable all warnings—highly recommended during development:

```
ALTER SESSION SET PLSQL_WARNINGS='ENABLE:ALL';
```

For the session, enable PERFORMANCE warnings:

```
ALTER SESSION SET PLSQL_WARNINGS='ENABLE:PERFORMANCE';
```

For the procedure loc_var, enable PERFORMANCE warnings, and reuse settings:

```
ALTER PROCEDURE loc_var
  COMPILE PLSQL_WARNINGS='ENABLE:PERFORMANCE'
  REUSE SETTINGS;
```

For the session, enable SEVERE warnings, disable PERFORMANCE warnings, and treat PLW-06002 warnings as errors:

```
ALTER SESSION
  SET PLSQL_WARNINGS='ENABLE:SEVERE', 'DISABLE:PERFORMANCE', 'ERROR:06002';
```

For the session, disable all warnings:

```
ALTER SESSION SET PLSQL_WARNINGS='DISABLE:ALL';
```

DBMS_WARNING Package

If you are writing PL/SQL units in a development environment that compiles them (such as SQL*Plus), you can display and set the value of PLSQL_WARNINGS by invoking subprograms in the DBMS_WARNING package.

Example 12-2 uses an ALTER SESSION statement to disable all warning messages for the session and then compiles a procedure that has unreachable code. The procedure compiles without warnings. Next, the example enables all warnings for the session by invoking DBMS_WARNING.set_warning_setting_string and displays the value of PLSQL_WARNINGS by invoking DBMS_WARNING.get_warning_setting_string. Finally, the example recompiles the procedure, and the compiler generates a warning about the unreachable code.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Unreachable code could represent a mistake or be intentionally hidden by a debug flag.

`DBMS_WARNING` subprograms are useful when you are compiling a complex application composed of several nested SQL*Plus scripts, where different subprograms need different `PLSQL_WARNINGS` settings. With `DBMS_WARNING` subprograms, you can save the current `PLSQL_WARNINGS` setting, change the setting to compile a particular set of subprograms, and then restore the setting to its original value.

> **See Also**
>
> *Oracle Database PL/SQL Packages and Types Reference* for more information about the `DBMS_WARNING` package

Example 12-2 Displaying and Setting PLSQL_WARNINGS with DBMS_WARNING Subprograms

Disable all warning messages for this session:

```
ALTER SESSION SET PLSQL_WARNINGS='DISABLE:ALL';
```

With warnings disabled, this procedure compiles with no warnings:

```
CREATE OR REPLACE PROCEDURE unreachable_code AUTHID DEFINER AS
  x CONSTANT BOOLEAN := TRUE;
BEGIN
  IF x THEN
    DBMS_OUTPUT.PUT_LINE('TRUE');
  ELSE
    DBMS_OUTPUT.PUT_LINE('FALSE');
  END IF;
END unreachable_code;
/
```

Enable all warning messages for this session:

```
CALL DBMS_WARNING.set_warning_setting_string ('ENABLE:ALL', 'SESSION');
```

Check warning setting:

```
SELECT DBMS_WARNING.get_warning_setting_string() FROM DUAL;
```

Result:

```
DBMS_WARNING.GET_WARNING_SETTING_STRING()
-----------------------------------------

ENABLE:ALL

1 row selected.
```

Recompile procedure:

```
ALTER PROCEDURE unreachable_code COMPILE;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
SP2-0805: Procedure altered with compilation warnings
```

Show errors:

```
SHOW ERRORS
```

Result:

```
Errors for PROCEDURE UNREACHABLE_CODE:

LINE/COL ERROR
-------- -----------------------------------------------------------------
7/5      PLW-06002: Unreachable code
```

Overview of Exception Handling

Exceptions (PL/SQL runtime errors) can arise from design faults, coding mistakes, hardware failures, and many other sources. You cannot anticipate all possible exceptions, but you can write exception handlers that let your program to continue to operate in their presence.

Any PL/SQL block can have an exception-handling part, which can have one or more exception handlers. For example, an exception-handling part could have this syntax:

```
EXCEPTION
  WHEN ex_name_1 THEN statements_1                -- Exception handler
  WHEN ex_name_2 OR ex_name_3 THEN statements_2  -- Exception handler
  WHEN OTHERS THEN statements_3                     -- Exception handler
END;
```

In the preceding syntax example, *ex_name*_n is the name of an exception and *statements*_n is one or more statements. (For complete syntax and semantics, see "Exception Handler".)

When an exception is raised in the executable part of the block, the executable part stops and control transfers to the exception-handling part. If *ex_name_1* was raised, then *statements_1* run. If either *ex_name_2* or *ex_name_3* was raised, then *statements_2* run. If any other exception was raised, then *statements_3* run.

After an exception handler runs, control transfers to the next statement of the enclosing block. If there is no enclosing block, then:

- If the exception handler is in a subprogram, then control returns to the invoker, at the statement after the invocation.
- If the exception handler is in an anonymous block, then control transfers to the host environment (for example, SQL*Plus)

If an exception is raised in a block that has no exception handler for it, then the exception propagates. That is, the exception reproduces itself in successive enclosing blocks until a block has a handler for it or there is no enclosing block (for more information, see "Exception Propagation"). If there is no handler for the exception, then PL/SQL returns an unhandled exception error to the invoker or host environment, which determines the outcome (for more information, see "Unhandled Exceptions").

Topics

- Exception Categories
- Advantages of Exception Handlers
- Guidelines for Avoiding and Handling Exceptions

Copyright © 1996, 2025, Oracle and/or its affiliates.

Exception Categories

The exception categories are:

- **Internally defined**

  The runtime system raises internally defined exceptions implicitly (automatically). Examples of internally defined exceptions are ORA-00060 (deadlock detected while waiting for resource) and ORA-27102 (out of memory).

  An internally defined exception always has an error code, but does not have a name unless PL/SQL gives it one or you give it one.

  For more information, see "Internally Defined Exceptions".

- **Predefined**

  A predefined exception is an internally defined exception that PL/SQL has given a name. For example, ORA-06500 (PL/SQL: storage error) has the predefined name `STORAGE_ERROR`.

  For more information, see "Predefined Exceptions".

- **User-defined**

  You can declare your own exceptions in the declarative part of any PL/SQL anonymous block, subprogram, or package. For example, you might declare an exception named `insufficient_funds` to flag overdrawn bank accounts.

  You must raise user-defined exceptions explicitly.

  For more information, see "User-Defined Exceptions".

Table 12-2 summarizes the exception categories.

Table 12-2 Exception Categories

Category	Definer	Has Error Code	Has Name	Raised Implicitly	Raised Explicitly
Internally defined	Runtime system	Always	Only if you assign one	Yes	Optionally[1]
Predefined	Runtime system	Always	Always	Yes	Optionally[1]
User-defined	User	Only if you assign one	Always	No	Always

1 For details, see "Raising Internally Defined Exception with RAISE Statement".

For a named exception, you can write a specific exception handler, instead of handling it with an `OTHERS` exception handler. A specific exception handler is more efficient than an `OTHERS` exception handler, because the latter must invoke a function to determine which exception it is handling. For details, see "Retrieving Error Code and Error Message".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Advantages of Exception Handlers

Using exception handlers for error-handling makes programs easier to write and understand, and reduces the likelihood of unhandled exceptions.

Without exception handlers, you must check for every possible error, everywhere that it might occur, and then handle it. It is easy to overlook a possible error or a place where it might occur, especially if the error is not immediately detectable (for example, bad data might be undetectable until you use it in a calculation). Error-handling code is scattered throughout the program.

With exception handlers, you need not know every possible error or everywhere that it might occur. You need only include an exception-handling part in each block where errors might occur. In the exception-handling part, you can include exception handlers for both specific and unknown errors. If an error occurs anywhere in the block (including inside a sub-block), then an exception handler handles it. Error-handling code is isolated in the exception-handling parts of the blocks.

In Example 12-3, a procedure uses a single exception handler to handle the predefined exception `NO_DATA_FOUND`, which can occur in either of two `SELECT INTO` statements.

If multiple statements use the same exception handler, and you want to know which statement failed, you can use locator variables, as in Example 12-4.

You determine the precision of your error-handling code. You can have a single exception handler for all division-by-zero errors, bad array indexes, and so on. You can also check for errors in a single statement by putting that statement inside a block with its own exception handler.

Example 12-3 Single Exception Handler for Multiple Exceptions

```
CREATE OR REPLACE PROCEDURE select_item (
  t_column VARCHAR2,
  t_name   VARCHAR2
) AUTHID DEFINER
IS
  temp VARCHAR2(30);
BEGIN
  temp := t_column;  -- For error message if next SELECT fails

  -- Fails if table t_name does not have column t_column:

  SELECT COLUMN_NAME INTO temp
  FROM USER_TAB_COLS
  WHERE TABLE_NAME = UPPER(t_name)
  AND COLUMN_NAME = UPPER(t_column);

  temp := t_name;  -- For error message if next SELECT fails

  -- Fails if there is no table named t_name:

  SELECT OBJECT_NAME INTO temp
  FROM USER_OBJECTS
  WHERE OBJECT_NAME = UPPER(t_name)
  AND OBJECT_TYPE = 'TABLE';

EXCEPTION
  WHEN NO_DATA_FOUND THEN
    DBMS_OUTPUT.PUT_LINE ('No Data found for SELECT on ' || temp);
  WHEN OTHERS THEN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    DBMS_OUTPUT.PUT_LINE ('Unexpected error');
    RAISE;
END;
/
```

Invoke procedure (there is a `DEPARTMENTS` table, but it does not have a `LAST_NAME` column):

```
BEGIN
  select_item('departments', 'last_name');
END;
/
```

Result:

```
No Data found for SELECT on departments
```

Invoke procedure (there is no `EMP` table):

```
BEGIN
  select_item('emp', 'last_name');
END;
/
```

Result:

```
No Data found for SELECT on emp
```

Example 12-4 Locator Variables for Statements that Share Exception Handler

```
CREATE OR REPLACE PROCEDURE loc_var AUTHID DEFINER IS
  stmt_no  POSITIVE;
  name_    VARCHAR2(100);
BEGIN
  stmt_no := 1;

  SELECT table_name INTO name_
  FROM user_tables
  WHERE table_name LIKE 'ABC%';

  stmt_no := 2;

  SELECT table_name INTO name_
  FROM user_tables
  WHERE table_name LIKE 'XYZ%';
EXCEPTION
  WHEN NO_DATA_FOUND THEN
    DBMS_OUTPUT.PUT_LINE ('Table name not found in query ' || stmt_no);
END;
/
CALL loc_var();
```

Result:

```
Table name not found in query 1
```

Guidelines for Avoiding and Handling Exceptions

To make your programs as reliable and safe as possible:

- Use both error-checking code and exception handlers.

  Use error-checking code wherever bad input data can cause an error. Examples of bad input data are incorrect or null actual parameters and queries that return no rows or more

Copyright © 1996, 2025, Oracle and/or its affiliates.

rows than you expect. Test your code with different combinations of bad input data to see what potential errors arise.

Sometimes you can use error-checking code to avoid raising an exception, as in Example 12-7.

- Add exception handlers wherever errors can occur.

  Errors are especially likely during arithmetic calculations, string manipulation, and database operations. Errors can also arise from problems that are independent of your code—for example, disk storage or memory hardware failure—but your code still must take corrective action.

- Design your programs to work when the database is not in the state you expect.

  For example, a table you query might have columns added or deleted, or their types might have changed. You can avoid problems by declaring scalar variables with `%TYPE` qualifiers and record variables to hold query results with `%ROWTYPE` qualifiers.

- Whenever possible, write exception handlers for named exceptions instead of using `OTHERS` exception handlers.

  Learn the names and causes of the predefined exceptions. If you know that your database operations might raise specific internally defined exceptions that do not have names, then give them names so that you can write exception handlers specifically for them.

- Have your exception handlers output debugging information.

  If you store the debugging information in a separate table, do it with an autonomous routine, so that you can commit your debugging information even if you roll back the work that the main subprogram did. For information about autonomous routines, see "AUTONOMOUS_TRANSACTION Pragma".

- For each exception handler, carefully decide whether to have it commit the transaction, roll it back, or let it continue.

  Regardless of the severity of the error, you want to leave the database in a consistent state and avoid storing bad data.

- Avoid unhandled exceptions by including an `OTHERS` exception handler at the top level of every PL/SQL program.

  Make the last statement in the `OTHERS` exception handler either `RAISE` or an invocation of of a subroutine marked with `SUPPRESSES_WARNING_6009` pragma. (If you do not follow this practice, and PL/SQL warnings are enabled, then you get PLW-06009.) For information about `RAISE` or an invocation of the `RAISE_APPLICATION_ERROR`, see "Raising Exceptions Explicitly".

Internally Defined Exceptions

Internally defined exceptions (ORA-*n* errors) are described in *Oracle Database Error Messages Reference*. The runtime system raises them implicitly (automatically).

An internally defined exception does not have a name unless either PL/SQL gives it one (see "Predefined Exceptions") or you give it one.

If you know that your database operations might raise specific internally defined exceptions that do not have names, then give them names so that you can write exception handlers specifically for them. Otherwise, you can handle them only with `OTHERS` exception handlers.

To give a name to an internally defined exception, do the following in the declarative part of the appropriate anonymous block, subprogram, or package. (To determine the appropriate block, see "Exception Propagation".)

Copyright © 1996, 2025, Oracle and/or its affiliates.

1. Declare the name.

   An exception name declaration has this syntax:

   ```
   exception_name EXCEPTION;
   ```

   For semantic information, see "Exception Declaration".

2. Associate the name with the error code of the internally defined exception.

   The syntax is:

   ```
   PRAGMA EXCEPTION_INIT (exception_name, error_code)
   ```

   For semantic information, see "EXCEPTION_INIT Pragma".

> **Note**
>
> An internally defined exception with a user-declared name is still an internally defined exception, not a user-defined exception.

Example 12-5 gives the name `deadlock_detected` to the internally defined exception ORA-00060 (deadlock detected while waiting for resource) and uses the name in an exception handler.

> **See Also**
>
> "Raising Internally Defined Exception with RAISE Statement"

Example 12-5 Naming Internally Defined Exception

```
DECLARE
  deadlock_detected EXCEPTION;
  PRAGMA EXCEPTION_INIT(deadlock_detected, -60);
BEGIN
  ...
EXCEPTION
  WHEN deadlock_detected THEN
    ...
END;
/
```

Predefined Exceptions

Predefined exceptions are internally defined exceptions that have predefined names, which PL/SQL declares globally in the package `STANDARD`. The runtime system raises predefined exceptions implicitly (automatically). Because predefined exceptions have names, you can write exception handlers specifically for them.

Table 12-3 lists the names and error codes of the predefined exceptions.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 12-3 PL/SQL Predefined Exceptions

Exception Name	Oracle Error	Error Code
ACCESS_INTO_NULL	ORA-06530	-6530
CASE_NOT_FOUND	ORA-06592	-6592
COLLECTION_IS_NULL	ORA-06531	-6531
CURSOR_ALREADY_OPEN	ORA-06511	-6511
DUP_VAL_ON_INDEX	ORA-00001	-1
INVALID_CURSOR	ORA-01001	-1001
INVALID_NUMBER	ORA-01722	-1722
LOGIN_DENIED	ORA-01017	-1017
NO_DATA_FOUND	ORA-01403	+100
NO_DATA_NEEDED	ORA-06548	-6548
NOT_LOGGED_ON	ORA-01012	-1012
PROGRAM_ERROR	ORA-06501	-6501
ROWTYPE_MISMATCH	ORA-06504	-6504
SELF_IS_NULL	ORA-30625	-30625
STORAGE_ERROR	ORA-06500	-6500
SUBSCRIPT_BEYOND_COUNT	ORA-06533	-6533
SUBSCRIPT_OUTSIDE_LIMIT	ORA-06532	-6532
SYS_INVALID_ROWID	ORA-01410	-1410
TIMEOUT_ON_RESOURCE	ORA-00051	-51
TOO_MANY_ROWS	ORA-01422	-1422
VALUE_ERROR	ORA-06502	-6502
ZERO_DIVIDE	ORA-01476	-1476

Example 12-6 calculates a price-to-earnings ratio for a company. If the company has zero earnings, the division operation raises the predefined exception `ZERO_DIVIDE` and the executable part of the block transfers control to the exception-handling part.

Example 12-7 uses error-checking code to avoid the exception that Example 12-6 handles.

In Example 12-8, the procedure opens a cursor variable for either the `EMPLOYEES` table or the `DEPARTMENTS` table, depending on the value of the parameter `discrim`. The anonymous block invokes the procedure to open the cursor variable for the `EMPLOYEES` table, but fetches from the `DEPARTMENTS` table, which raises the predefined exception `ROWTYPE_MISMATCH`.

See Also

- "Raising Internally Defined Exception with RAISE Statement"
- Database Error Messages to find more information about individual exceptions by searching the Oracle Error number

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 12-6 Anonymous Block Handles ZERO_DIVIDE

```
DECLARE
  stock_price   NUMBER := 9.73;
  net_earnings  NUMBER := 0;
  pe_ratio      NUMBER;
BEGIN
  pe_ratio := stock_price / net_earnings;  -- raises ZERO_DIVIDE exception
  DBMS_OUTPUT.PUT_LINE('Price/earnings ratio = ' || pe_ratio);
EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Company had zero earnings.');
    pe_ratio := NULL;
END;
/
```

Result:

```
Company had zero earnings.
```

Example 12-7 Anonymous Block Avoids ZERO_DIVIDE

```
DECLARE
  stock_price   NUMBER := 9.73;
  net_earnings  NUMBER := 0;
  pe_ratio      NUMBER;
BEGIN
  pe_ratio :=
    CASE net_earnings
      WHEN 0 THEN NULL
      ELSE stock_price / net_earnings
    END;
END;
/
```

Example 12-8 Anonymous Block Handles ROWTYPE_MISMATCH

```
CREATE OR REPLACE PACKAGE emp_dept_data AUTHID DEFINER AS
  TYPE cv_type IS REF CURSOR;

  PROCEDURE open_cv (
    cv       IN OUT cv_type,
    discrim  IN     POSITIVE
  );
  END emp_dept_data;
/

CREATE OR REPLACE PACKAGE BODY emp_dept_data AS
  PROCEDURE open_cv (
    cv      IN OUT cv_type,
    discrim IN     POSITIVE) IS
  BEGIN
    IF discrim = 1 THEN
    OPEN cv FOR
      SELECT * FROM EMPLOYEES ORDER BY employee_id;
    ELSIF discrim = 2 THEN
      OPEN cv FOR
        SELECT * FROM DEPARTMENTS ORDER BY department_id;
    END IF;
  END open_cv;
END emp_dept_data;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Invoke procedure open_cv from anonymous block:

```
DECLARE
  emp_rec   EMPLOYEES%ROWTYPE;
  dept_rec  DEPARTMENTS%ROWTYPE;
  cv        Emp_dept_data.CV_TYPE;
BEGIN
  emp_dept_data.open_cv(cv, 1);  -- Open cv for EMPLOYEES fetch.
  FETCH cv INTO dept_rec;        -- Fetch from DEPARTMENTS.
  DBMS_OUTPUT.PUT(dept_rec.DEPARTMENT_ID);
  DBMS_OUTPUT.PUT_LINE('  ' || dept_rec.LOCATION_ID);
EXCEPTION
  WHEN ROWTYPE_MISMATCH THEN
     BEGIN
       DBMS_OUTPUT.PUT_LINE
         ('Row type mismatch, fetching EMPLOYEES data ...');
       FETCH cv INTO emp_rec;
       DBMS_OUTPUT.PUT(emp_rec.DEPARTMENT_ID);
       DBMS_OUTPUT.PUT_LINE('  ' || emp_rec.LAST_NAME);
     END;
END;
/
```

Result:

```
Row type mismatch, fetching EMPLOYEES data ...
90  King
```

User-Defined Exceptions

You can declare your own exceptions in the declarative part of any PL/SQL anonymous block, subprogram, or package.

An exception name declaration has this syntax:

```
exception_name EXCEPTION;
```

For semantic information, see "Exception Declaration".

You must raise a user-defined exception explicitly. For details, see "Raising Exceptions Explicitly".

Redeclared Predefined Exceptions

Oracle recommends against redeclaring predefined exceptions—that is, declaring a user-defined exception name that is a predefined exception name. (For a list of predefined exception names, see Table 12-3.)

If you redeclare a predefined exception, your local declaration overrides the global declaration in package STANDARD. Exception handlers written for the globally declared exception become unable to handle it—unless you qualify its name with the package name STANDARD.

Example 12-9 shows this.

Example 12-9 Redeclared Predefined Identifier

```
DROP TABLE t;
CREATE TABLE t (c NUMBER);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

In the following block, the `INSERT` statement implicitly raises the predefined exception `INVALID_NUMBER`, which the exception handler handles.

```
DECLARE
  default_number NUMBER := 0;
BEGIN
  INSERT INTO t VALUES(TO_NUMBER('100.00', '9G999'));
EXCEPTION
  WHEN INVALID_NUMBER THEN
    DBMS_OUTPUT.PUT_LINE('Substituting default value for invalid number.');
    INSERT INTO t VALUES(default_number);
END;
/
```

Result:

```
Substituting default value for invalid number.
```

The following block redeclares the predefined exception `INVALID_NUMBER`. When the `INSERT` statement implicitly raises the predefined exception `INVALID_NUMBER`, the exception handler does not handle it.

```
DECLARE
  default_number NUMBER := 0;
  i NUMBER := 5;
  invalid_number EXCEPTION;    -- redeclare predefined exception
BEGIN
  INSERT INTO t VALUES(TO_NUMBER('100.00', '9G999'));
EXCEPTION
  WHEN INVALID_NUMBER THEN
    DBMS_OUTPUT.PUT_LINE('Substituting default value for invalid number.');
    INSERT INTO t VALUES(default_number);
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-01722: unable to convert string value containing '1' to a number
ORA-06512: at line 6
```

The exception handler in the preceding block handles the predefined exception `INVALID_NUMBER` if you qualify the exception name in the exception handler:

```
DECLARE
  default_number NUMBER := 0;
  i NUMBER := 5;
  invalid_number EXCEPTION;    -- redeclare predefined exception
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  INSERT INTO t VALUES(TO_NUMBER('100.00', '9G999'));
EXCEPTION
  WHEN STANDARD.INVALID_NUMBER THEN
    DBMS_OUTPUT.PUT_LINE('Substituting default value for invalid number.');
    INSERT INTO t VALUES(default_number);
END;
/
```

Result:

```
Substituting default value for invalid number.
```

Raising Exceptions Explicitly

To raise an exception explicitly, use either the `RAISE` statement or `RAISE_APPLICATION_ERROR` procedure.

Topics

- RAISE Statement
- RAISE_APPLICATION_ERROR Procedure

RAISE Statement

The `RAISE` statement explicitly raises an exception. Outside an exception handler, you must specify the exception name. Inside an exception handler, if you omit the exception name, the `RAISE` statement reraises the current exception.

Topics

- Raising User-Defined Exception with RAISE Statement
- Raising Internally Defined Exception with RAISE Statement
- Reraising Current Exception with RAISE Statement

Raising User-Defined Exception with RAISE Statement

In Example 12-10, the procedure declares an exception named `past_due`, raises it explicitly with the `RAISE` statement, and handles it with an exception handler.

Example 12-10 Declaring, Raising, and Handling User-Defined Exception

```
CREATE PROCEDURE account_status (
  due_date DATE,
  today    DATE
) AUTHID DEFINER
IS
  past_due  EXCEPTION;  -- declare exception
BEGIN
  IF due_date < today THEN
    RAISE past_due;  -- explicitly raise exception
  END IF;
EXCEPTION
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  WHEN past_due THEN  -- handle exception
    DBMS_OUTPUT.PUT_LINE ('Account past due.');
END;
/

BEGIN
  account_status (TO_DATE('01-JUL-2010', 'DD-MON-YYYY'),
                  TO_DATE('09-JUL-2010', 'DD-MON-YYYY'));
END;
/
```

Result:

```
Account past due.
```

Raising Internally Defined Exception with RAISE Statement

Although the runtime system raises internally defined exceptions implicitly, you can raise them explicitly with the `RAISE` statement if they have names. Table 12-3 lists the internally defined exceptions that have predefined names. "Internally Defined Exceptions" explains how to give user-declared names to internally defined exceptions.

An exception handler for a named internally defined exception handles that exception whether it is raised implicitly or explicitly.

In Example 12-11, the procedure raises the predefined exception `INVALID_NUMBER` either explicitly or implicitly, and the `INVALID_NUMBER` exception handler always handles it.

Example 12-11 Explicitly Raising Predefined Exception

```
DROP TABLE t;
CREATE TABLE t (c NUMBER);

CREATE PROCEDURE p (n NUMBER) AUTHID DEFINER IS
  default_number NUMBER := 0;
BEGIN
  IF n < 0 THEN
    RAISE INVALID_NUMBER;  -- raise explicitly
  ELSE
    INSERT INTO t VALUES(TO_NUMBER('100.00', '9G999'));  -- raise implicitly
  END IF;
EXCEPTION
  WHEN INVALID_NUMBER THEN
    DBMS_OUTPUT.PUT_LINE('Substituting default value for invalid number.');
    INSERT INTO t VALUES(default_number);
END;
/

BEGIN
  p(-1);
END;
/
```

Result:

```
Substituting default value for invalid number.

BEGIN
  p(1);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Substituting default value for invalid number.
```

Reraising Current Exception with RAISE Statement

In an exception handler, you can use the `RAISE` statement to"reraise" the exception being handled. Reraising the exception passes it to the enclosing block, which can handle it further. (If the enclosing block cannot handle the reraised exception, then the exception propagates—see "Exception Propagation".) When reraising the current exception, you need not specify an exception name.

In Example 12-12, the handling of the exception starts in the inner block and finishes in the outer block. The outer block declares the exception, so the exception name exists in both blocks, and each block has an exception handler specifically for that exception. The inner block raises the exception, and its exception handler does the initial handling and then reraises the exception, passing it to the outer block for further handling.

Example 12-12 Reraising Exception

```
DECLARE
  salary_too_high   EXCEPTION;
  current_salary    NUMBER := 20000;
  max_salary        NUMBER := 10000;
  erroneous_salary  NUMBER;
BEGIN

  BEGIN
    IF current_salary > max_salary THEN
      RAISE salary_too_high;   -- raise exception
    END IF;
  EXCEPTION
    WHEN salary_too_high THEN  -- start handling exception
      erroneous_salary := current_salary;
      DBMS_OUTPUT.PUT_LINE('Salary ' || erroneous_salary ||' is out of range.');
      DBMS_OUTPUT.PUT_LINE ('Maximum salary is ' || max_salary || '.');
      RAISE;  -- reraise current exception (exception name is optional)
  END;

EXCEPTION
  WHEN salary_too_high THEN    -- finish handling exception
    current_salary := max_salary;

    DBMS_OUTPUT.PUT_LINE (
      'Revising salary from ' || erroneous_salary ||
      ' to ' || current_salary || '.'
    );
END;
/
```

Result:

```
Salary 20000 is out of range.
Maximum salary is 10000.
Revising salary from 20000 to 10000.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

RAISE_APPLICATION_ERROR Procedure

You can invoke the `RAISE_APPLICATION_ERROR` procedure (defined in the `DBMS_STANDARD` package) only from a stored subprogram or method. Typically, you invoke this procedure to raise a user-defined exception and return its error code and error message to the invoker.

The `RAISE_APPLICATION_ERROR` procedure is marked with `SUPPRESSES_WARNING_6009` pragma.

For semantic information, see "SUPPRESSES_WARNING_6009 Pragma".

To invoke `RAISE_APPLICATION_ERROR`, use this syntax:

```
RAISE_APPLICATION_ERROR (error_code, message[, {TRUE | FALSE}]);
```

You must have assigned *`error_code`* to the user-defined exception with the `EXCEPTION_INIT` pragma. The syntax is:

```
PRAGMA EXCEPTION_INIT (exception_name, error_code)
```

The *`error_code`* is an integer in the range -20000..-20999 and the *`message`* is a character string of at most 2048 bytes.

For semantic information, see "EXCEPTION_INIT Pragma".

The *`message`* is a character string of at most 2048 bytes.

If you specify `TRUE`, PL/SQL puts *`error_code`* on top of the error stack. Otherwise, PL/SQL replaces the error stack with *`error_code`*.

In Example 12-13, an anonymous block declares an exception named `past_due`, assigns the error code -20000 to it, and invokes a stored procedure. The stored procedure invokes the `RAISE_APPLICATION_ERROR` procedure with the error code -20000 and a message, whereupon control returns to the anonymous block, which handles the exception. To retrieve the message associated with the exception, the exception handler in the anonymous block invokes the `SQLERRM` function, described in "Retrieving Error Code and Error Message".

Example 12-13 Raising User-Defined Exception with RAISE_APPLICATION_ERROR

```
CREATE OR REPLACE PROCEDURE account_status (
  due_date DATE,
  today    DATE
) AUTHID DEFINER
IS
BEGIN
  IF due_date < today THEN                    -- explicitly raise exception
    RAISE_APPLICATION_ERROR(-20000, 'Account past due.');
  END IF;
END;
/

DECLARE
  past_due  EXCEPTION;                        -- declare exception
  PRAGMA EXCEPTION_INIT (past_due, -20000);  -- assign error code to exception
BEGIN
  account_status (TO_DATE('01-JUL-2010', 'DD-MON-YYYY'),
                  TO_DATE('09-JUL-2010', 'DD-MON-YYYY'));   -- invoke
procedure
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
EXCEPTION
  WHEN past_due THEN                          -- handle exception
    DBMS_OUTPUT.PUT_LINE(TO_CHAR(SQLERRM(-20000)));
END;
/
```

Result:

```
ORA-20000: Account past due.
```

Exception Propagation

If an exception is raised in a block that has no exception handler for it, then the exception **propagates**. That is, the exception reproduces itself in successive enclosing blocks until either a block has a handler for it or there is no enclosing block. If there is no handler for the exception, then PL/SQL returns an unhandled exception error to the invoker or host environment, which determines the outcome (for more information, see "Unhandled Exceptions").

In Figure 12-1, one block is nested inside another. The inner block raises exception A. The inner block has an exception handler for A, so A does not propagate. After the exception handler runs, control transfers to the next statement of the outer block.

Figure 12-1 Exception Does Not Propagate

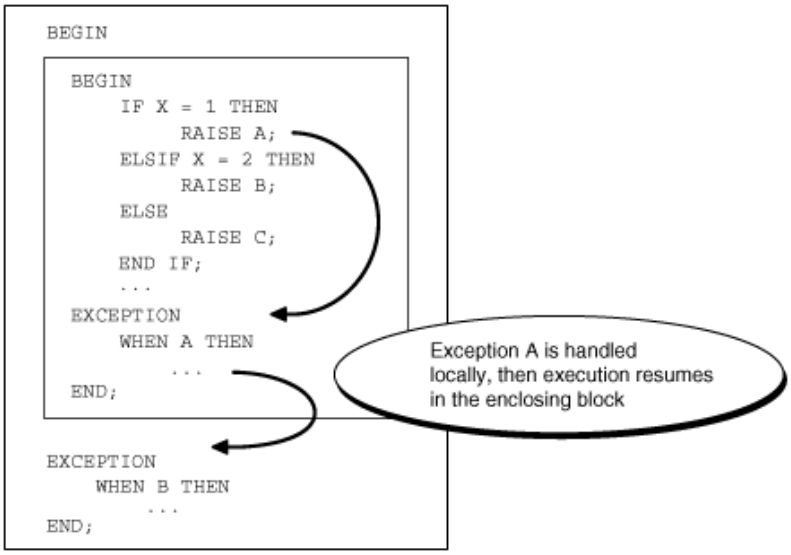

In Figure 12-2, the inner block raises exception B. The inner block does not have an exception handler for exception B, so B propagates to the outer block, which does have an exception handler for it. After the exception handler runs, control transfers to the host environment.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Figure 12-2 Exception Propagates from Inner Block to Outer Block

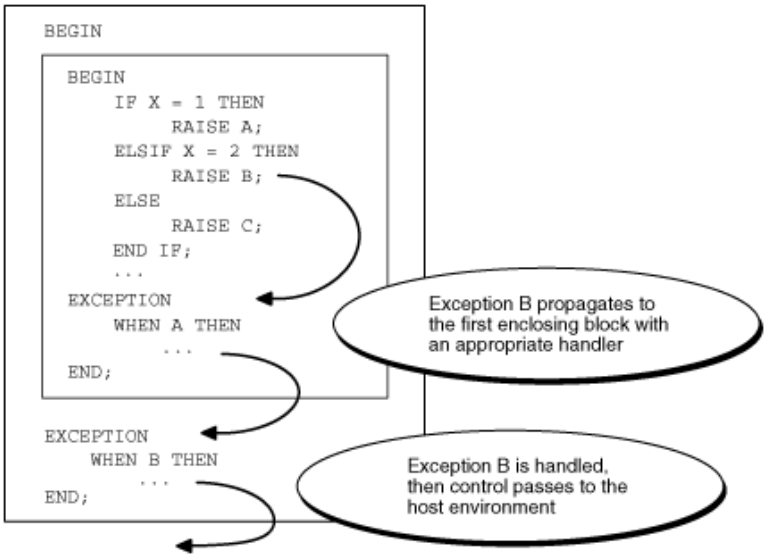

In Figure 12-3, the inner block raises exception C. The inner block does not have an exception handler for C, so exception C propagates to the outer block. The outer block does not have an exception handler for C, so PL/SQL returns an unhandled exception error to the host environment.

Figure 12-3 PL/SQL Returns Unhandled Exception Error to Host Environment

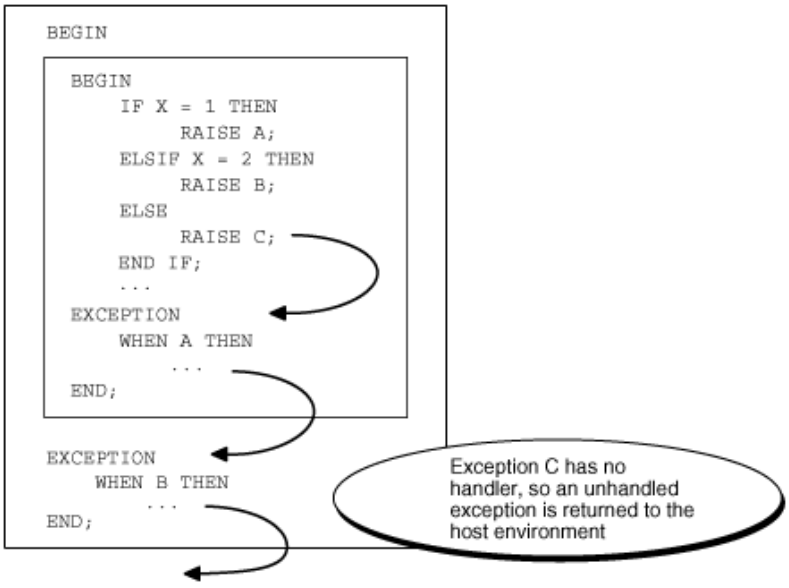

A user-defined exception can propagate beyond its scope (that is, beyond the block that declares it), but its name does not exist beyond its scope. Therefore, beyond its scope, a user-defined exception can be handled only with an `OTHERS` exception handler.

In Example 12-14, the inner block declares an exception named `past_due`, for which it has no exception handler. When the inner block raises `past_due`, the exception propagates to the

Copyright © 1996, 2025, Oracle and/or its affiliates.

outer block, where the name `past_due` does not exist. The outer block handles the exception with an `OTHERS` exception handler.

If the outer block does not handle the user-defined exception, then an error occurs, as in Example 12-15.

> **Note**
>
> Exceptions cannot propagate across remote subprogram invocations. Therefore, a PL/SQL block cannot handle an exception raised by a remote subprogram.

Topics

- Propagation of Exceptions Raised in Declarations
- Propagation of Exceptions Raised in Exception Handlers

Example 12-14 Exception that Propagates Beyond Scope is Handled

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER AS
BEGIN

  DECLARE
    past_due     EXCEPTION;
    PRAGMA EXCEPTION_INIT (past_due, -4910);
    due_date     DATE := trunc(SYSDATE) - 1;
    todays_date  DATE := trunc(SYSDATE);
  BEGIN
    IF due_date < todays_date THEN
      RAISE past_due;
    END IF;
  END;

EXCEPTION
  WHEN OTHERS THEN
    ROLLBACK;
    RAISE;
END;
/
```

Example 12-15 Exception that Propagates Beyond Scope is Not Handled

```
BEGIN

  DECLARE
    past_due     EXCEPTION;
    due_date     DATE := trunc(SYSDATE) - 1;
    todays_date  DATE := trunc(SYSDATE);
  BEGIN
    IF due_date < todays_date THEN
      RAISE past_due;
    END IF;
  END;

END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
*
ERROR at line 1:
ORA-06510: PL/SQL: unhandled user-defined exception
ORA-06512: at line 9
```

Propagation of Exceptions Raised in Declarations

An exception raised in a declaration propagates immediately to the enclosing block (or to the invoker or host environment if there is no enclosing block). Therefore, the exception handler must be in an enclosing or invoking block, not in the same block as the declaration.

In Example 12-16, the `VALUE_ERROR` exception handler is in the same block as the declaration that raises `VALUE_ERROR`. Because the exception propagates immediately to the host environment, the exception handler does not handle it.

Example 12-17 is like Example 12-16 except that an enclosing block handles the `VALUE_ERROR` exception that the declaration in the inner block raises.

Example 12-16 Exception Raised in Declaration is Not Handled

```
DECLARE
  credit_limit CONSTANT NUMBER(3) := 5000;  -- Maximum value is 999
BEGIN
  NULL;
EXCEPTION
  WHEN VALUE_ERROR THEN
    DBMS_OUTPUT.PUT_LINE('Exception raised in declaration.');
END;
/
```

Result:

```
DECLARE
*
ERROR at line 1:
ORA-06502: PL/SQL: value or conversion error: number precision too large
ORA-06512: at line 2
```

Example 12-17 Exception Raised in Declaration is Handled by Enclosing Block

```
BEGIN

  DECLARE
    credit_limit CONSTANT NUMBER(3) := 5000;
  BEGIN
    NULL;
  END;

EXCEPTION
  WHEN VALUE_ERROR THEN
    DBMS_OUTPUT.PUT_LINE('Exception raised in declaration.');
END;
/
```

Result:

```
Exception raised in declaration.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Propagation of Exceptions Raised in Exception Handlers

An exception raised in an exception handler propagates immediately to the enclosing block (or to the invoker or host environment if there is no enclosing block). Therefore, the exception handler must be in an enclosing or invoking block.

In Example 12-18, when `n` is zero, the calculation `1/n` raises the predefined exception `ZERO_DIVIDE`, and control transfers to the `ZERO_DIVIDE` exception handler in the same block. When the exception handler raises `ZERO_DIVIDE`, the exception propagates immediately to the invoker. The invoker does not handle the exception, so PL/SQL returns an unhandled exception error to the host environment.

Example 12-19 is like Example 12-18 except that when the procedure returns an unhandled exception error to the invoker, the invoker handles it.

Example 12-20 is like Example 12-18 except that an enclosing block handles the exception that the exception handler in the inner block raises.

In Example 12-21, the exception-handling part of the procedure has exception handlers for user-defined exception `i_is_one` and predefined exception `ZERO_DIVIDE`. When the `i_is_one` exception handler raises `ZERO_DIVIDE`, the exception propagates immediately to the invoker (therefore, the `ZERO_DIVIDE` exception handler does not handle it). The invoker does not handle the exception, so PL/SQL returns an unhandled exception error to the host environment.

Example 12-22 is like Example 12-21 except that an enclosing block handles the `ZERO_DIVIDE` exception that the `i_is_one` exception handler raises.

Example 12-18 Exception Raised in Exception Handler is Not Handled

```
CREATE OR REPLACE PROCEDURE print_reciprocal (n NUMBER) AUTHID DEFINER IS
BEGIN
  DBMS_OUTPUT.PUT_LINE(1/n);  -- handled
EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Error:');
    DBMS_OUTPUT.PUT_LINE(1/n || ' is undefined');  -- not handled
END;
/

BEGIN  -- invoking block
  print_reciprocal(0);
END;
/
```

Result:

```
Error:
BEGIN
*
ERROR at line 1:
ORA-01476: divisor is equal to zero
ORA-06512: at "HR.PRINT_RECIPROCAL", line 7
ORA-01476: divisor is equal to zero
ORA-06512: at line 2
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 12-19 Exception Raised in Exception Handler is Handled by Invoker

```
CREATE OR REPLACE PROCEDURE print_reciprocal (n NUMBER) AUTHID DEFINER IS
BEGIN
  DBMS_OUTPUT.PUT_LINE(1/n);
EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Error:');
    DBMS_OUTPUT.PUT_LINE(1/n || ' is undefined');
END;
/

BEGIN  -- invoking block
  print_reciprocal(0);
EXCEPTION
  WHEN ZERO_DIVIDE THEN  -- handles exception raised in exception handler
    DBMS_OUTPUT.PUT_LINE('1/0 is undefined.');
END;
/
```

Result:

```
Error:
1/0 is undefined.
```

Example 12-20 Exception Raised in Exception Handler is Handled by Enclosing Block

```
CREATE OR REPLACE PROCEDURE print_reciprocal (n NUMBER) AUTHID DEFINER IS
BEGIN

  BEGIN
    DBMS_OUTPUT.PUT_LINE(1/n);
  EXCEPTION
    WHEN ZERO_DIVIDE THEN
      DBMS_OUTPUT.PUT_LINE('Error in inner block:');
      DBMS_OUTPUT.PUT_LINE(1/n || ' is undefined.');
  END;

EXCEPTION
  WHEN ZERO_DIVIDE THEN  -- handles exception raised in exception handler
    DBMS_OUTPUT.PUT('Error in outer block: ');
    DBMS_OUTPUT.PUT_LINE('1/0 is undefined.');
END;
/

BEGIN
  print_reciprocal(0);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Error in inner block:
Error in outer block: 1/0 is undefined.
```

Example 12-21 Exception Raised in Exception Handler is Not Handled

```
CREATE OR REPLACE PROCEDURE descending_reciprocals (n INTEGER) AUTHID DEFINER
IS
  i INTEGER;
  i_is_one EXCEPTION;
BEGIN
  i := n;

  LOOP
    IF i = 1 THEN
      RAISE i_is_one;
    ELSE
      DBMS_OUTPUT.PUT_LINE('Reciprocal of ' || i || ' is ' || 1/i);
    END IF;

    i := i - 1;
  END LOOP;
EXCEPTION
  WHEN i_is_one THEN
    DBMS_OUTPUT.PUT_LINE('1 is its own reciprocal.');
    DBMS_OUTPUT.PUT_LINE('Reciprocal of ' || TO_CHAR(i-1) ||
                         ' is ' || TO_CHAR(1/(i-1)));

  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Error:');
    DBMS_OUTPUT.PUT_LINE(1/n || ' is undefined');
END;
/

BEGIN
  descending_reciprocals(3);
END;
/
```

Result:

```
Reciprocal of 3 is .333333333333333333333333333333333333333333
Reciprocal of 2 is .5
1 is its own reciprocal.
BEGIN
*
ERROR at line 1:
ORA-01476: divisor is equal to zero
ORA-06512: at "HR.DESCENDING_RECIPROCALS", line 19
ORA-06510: PL/SQL: unhandled user-defined exception
ORA-06512: at line 2
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 12-22 Exception Raised in Exception Handler is Handled by Enclosing Block

```
CREATE OR REPLACE PROCEDURE descending_reciprocals (n INTEGER) AUTHID DEFINER
IS
  i INTEGER;
  i_is_one EXCEPTION;
BEGIN

  BEGIN
    i := n;

    LOOP
      IF i = 1 THEN
        RAISE i_is_one;
      ELSE
        DBMS_OUTPUT.PUT_LINE('Reciprocal of ' || i || ' is ' || 1/i);
      END IF;

      i := i - 1;
    END LOOP;
  EXCEPTION
    WHEN i_is_one THEN
      DBMS_OUTPUT.PUT_LINE('1 is its own reciprocal.');
      DBMS_OUTPUT.PUT_LINE('Reciprocal of ' || TO_CHAR(i-1) ||
                           ' is ' || TO_CHAR(1/(i-1)));

    WHEN ZERO_DIVIDE THEN
      DBMS_OUTPUT.PUT_LINE('Error:');
      DBMS_OUTPUT.PUT_LINE(1/n || ' is undefined');
  END;

EXCEPTION
  WHEN ZERO_DIVIDE THEN  -- handles exception raised in exception handler
    DBMS_OUTPUT.PUT_LINE('Error:');
    DBMS_OUTPUT.PUT_LINE('1/0 is undefined');
END;
/

BEGIN
  descending_reciprocals(3);
END;
/
```

Result:

```
Reciprocal of 3 is .33333333333333333333333333333333333333333333
Reciprocal of 2 is .5
1 is its own reciprocal.
Error:
1/0 is undefined
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Unhandled Exceptions

If there is no handler for a raised exception, PL/SQL returns an unhandled exception error to the invoker or host environment, which determines the outcome.

If a stored subprogram exits with an unhandled exception, PL/SQL does not roll back database changes made by the subprogram.

The `FORALL` statement runs one DML statement multiple times, with different values in the `VALUES` and `WHERE` clauses. If one set of values raises an unhandled exception, then PL/SQL rolls back all database changes made earlier in the `FORALL` statement. For more information, see "Handling FORALL Exceptions Immediately" and "Handling FORALL Exceptions After FORALL Statement Completes".

> **Tip**
>
> Avoid unhandled exceptions by including an `OTHERS` exception handler at the top level of every PL/SQL program.

Retrieving Error Code and Error Message

In an exception handler, for the exception being handled:

- You can retrieve the error code with the PL/SQL function `SQLCODE`, described in "SQLCODE Function".
- You can retrieve the error message with either:
  - The PL/SQL function `SQLERRM`, described in "SQLERRM Function"

    This function returns a maximum of 512 bytes, which is the maximum length of an Oracle Database error message (including the error code, nested messages, and message inserts such as table and column names).
  - The package function `DBMS_UTILITY.FORMAT_ERROR_STACK`, described in *Oracle Database PL/SQL Packages and Types Reference*

    This function returns the full error stack, up to 2000 bytes.

  Oracle recommends using `DBMS_UTILITY.FORMAT_ERROR_STACK`, except when using the `FORALL` statement with its `SAVE EXCEPTIONS` clause, as in Example 13-13.

A SQL statement cannot invoke `SQLCODE` or `SQLERRM`. To use their values in a SQL statement, assign them to local variables first, as in Example 12-23.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - *Oracle Database PL/SQL Packages and Types Reference* for information about the `DBMS_UTILITY.FORMAT_ERROR_BACKTRACE` function, which displays the call stack at the point where an exception was raised, even if the subprogram is called from an exception handler in an outer scope
> - *Oracle Database PL/SQL Packages and Types Reference* for information about the `UTL_CALL_STACK` package, whose subprograms provide information about currently executing subprograms, including subprogram names

Example 12-23 Displaying SQLCODE and SQLERRM Values

```
DROP TABLE errors;
CREATE TABLE errors (
  code      NUMBER,
  message   VARCHAR2(64)
);

CREATE OR REPLACE PROCEDURE p AUTHID DEFINER AS
  name    EMPLOYEES.LAST_NAME%TYPE;
  v_code  NUMBER;
  v_errm  VARCHAR2(64);
BEGIN
  SELECT last_name INTO name
  FROM EMPLOYEES
  WHERE EMPLOYEE_ID = -1;
EXCEPTION
  WHEN OTHERS THEN
    v_code := SQLCODE;
    v_errm := SUBSTR(SQLERRM, 1, 64);
    DBMS_OUTPUT.PUT_LINE
      ('Error code ' || v_code || ': ' || v_errm);

    /* Invoke another procedure,
       declared with PRAGMA AUTONOMOUS_TRANSACTION,
       to insert information about errors. */

    INSERT INTO errors (code, message)
    VALUES (v_code, v_errm);

    RAISE;
END;
/
```

Continuing Execution After Handling Exceptions

After an exception handler runs, control transfers to the next statement of the enclosing block (or to the invoker or host environment if there is no enclosing block). The exception handler cannot transfer control back to its own block.

For example, in Example 12-24, after the `SELECT INTO` statement raises `ZERO_DIVIDE` and the exception handler handles it, execution cannot continue from the `INSERT` statement that follows the `SELECT INTO` statement.

If you want execution to resume with the `INSERT` statement that follows the `SELECT INTO` statement, then put the `SELECT INTO` statement in an inner block with its own `ZERO_DIVIDE` exception handler, as in Example 12-25.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> Example 13-13, where a bulk SQL operation continues despite exceptions

Example 12-24 Exception Handler Runs and Execution Ends

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS
  SELECT employee_id, salary, commission_pct
  FROM employees;

DECLARE
  sal_calc NUMBER(8,2);
BEGIN
  INSERT INTO employees_temp (employee_id, salary, commission_pct)
  VALUES (301, 2500, 0);

  SELECT (salary / commission_pct) INTO sal_calc
  FROM employees_temp
  WHERE employee_id = 301;

  INSERT INTO employees_temp VALUES (302, sal_calc/100, .1);
  DBMS_OUTPUT.PUT_LINE('Row inserted.');
EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Division by zero.');
END;
/
```

Result:

```
Division by zero.
```

Example 12-25 Exception Handler Runs and Execution Continues

```
DECLARE
  sal_calc NUMBER(8,2);
BEGIN
  INSERT INTO employees_temp (employee_id, salary, commission_pct)
  VALUES (301, 2500, 0);

  BEGIN
    SELECT (salary / commission_pct) INTO sal_calc
    FROM employees_temp
    WHERE employee_id = 301;
  EXCEPTION
    WHEN ZERO_DIVIDE THEN
      DBMS_OUTPUT.PUT_LINE('Substituting 2500 for undefined number.');
      sal_calc := 2500;
  END;

  INSERT INTO employees_temp VALUES (302, sal_calc/100, .1);
  DBMS_OUTPUT.PUT_LINE('Enclosing block: Row inserted.');
EXCEPTION
  WHEN ZERO_DIVIDE THEN
    DBMS_OUTPUT.PUT_LINE('Enclosing block: Division by zero.');
END;
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Substituting 2500 for undefined number.
Enclosing block: Row inserted.
```

Retrying Transactions After Handling Exceptions

To retry a transaction after handling an exception that it raised, use this technique:

1. Enclose the transaction in a sub-block that has an exception-handling part.
2. In the sub-block, before the transaction starts, mark a savepoint.
3. In the exception-handling part of the sub-block, put an exception handler that rolls back to the savepoint and then tries to correct the problem.
4. Put the sub-block inside a `LOOP` statement.
5. In the sub-block, after the `COMMIT` statement that ends the transaction, put an `EXIT` statement.

   If the transaction succeeds, the `COMMIT` and `EXIT` statements are processed.

   If the transaction fails, control transfers to the exception-handling part of the sub-block, and after the exception handler runs, the loop repeats.

Example 12-26 Retrying Transaction After Handling Exception

```
DROP TABLE results;
CREATE TABLE results (
  res_name   VARCHAR(20),
  res_answer VARCHAR2(3)
);

CREATE UNIQUE INDEX res_name_ix ON results (res_name);
INSERT INTO results (res_name, res_answer) VALUES ('SMYTHE', 'YES');
INSERT INTO results (res_name, res_answer) VALUES ('JONES', 'NO');

DECLARE
  name    VARCHAR2(20) := 'SMYTHE';
  answer  VARCHAR2(3) := 'NO';
  suffix  NUMBER := 1;
BEGIN
  FOR i IN 1..5 LOOP  -- Try transaction at most 5 times.

    DBMS_OUTPUT.PUT('Try #' || i);

    BEGIN  -- sub-block begins

       SAVEPOINT start_transaction;

       -- transaction begins

       DELETE FROM results WHERE res_answer = 'NO';

       INSERT INTO results (res_name, res_answer) VALUES (name, answer);

       -- Nonunique name raises DUP_VAL_ON_INDEX.

       -- If transaction succeeded:

       COMMIT;
       DBMS_OUTPUT.PUT_LINE(' succeeded.');
       EXIT;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    EXCEPTION
      WHEN DUP_VAL_ON_INDEX THEN
        DBMS_OUTPUT.PUT_LINE(' failed; trying again.');
        ROLLBACK TO start_transaction;    -- Undo changes.
        suffix := suffix + 1;             -- Try to fix problem.
        name := name || TO_CHAR(suffix);
    END;  -- sub-block ends

  END LOOP;
END;
/
```

Result:

```
Try #1 failed; trying again.
Try #2 succeeded.
```

Example 12-26 uses the preceding technique to retry a transaction whose `INSERT` statement raises the predefined exception `DUP_VAL_ON_INDEX` if the value of `res_name` is not unique.

Handling Errors in Distributed Queries

You can use a trigger or a stored subprogram to create a distributed query. This distributed query is decomposed by the local Oracle Database instance into a corresponding number of remote queries, which are sent to the remote nodes for execution. The remote nodes run the queries and send the results back to the local node. The local node then performs any necessary post-processing and returns the results to the user or application.

If a portion of a distributed statement fails, possibly from a constraint violation, then Oracle Database returns ORA-02055. Subsequent statements, or subprogram invocations, return ORA-02067 until a rollback or a rollback to savepoint is entered.

Design your application to check for any returned error messages that indicates that a portion of the distributed update has failed. If you detect a failure, rollback the entire transaction (or rollback to a savepoint) before allowing the application to proceed.

Copyright © 1996, 2025, Oracle and/or its affiliates.

13

PL/SQL Optimization and Tuning

This chapter explains how the PL/SQL compiler optimizes your code and how to write efficient PL/SQL code and improve existing PL/SQL code.

Topics

- PL/SQL Optimizer
- Candidates for Tuning
- Minimizing CPU Overhead
- Bulk SQL and Bulk Binding
- Chaining Pipelined Table Functions for Multiple Transformations
- Overview of Polymorphic Table Functions
- Updating Large Tables in Parallel
- Collecting Data About User-Defined Identifiers
- Profiling and Tracing PL/SQL Programs
- Compiling PL/SQL Units for Native Execution

> **See Also**
>
> *Oracle Database Development Guide* for disadvantages of cursor variables

PL/SQL Optimizer

Prior to Oracle Database 10g release 1, the PL/SQL compiler translated your source text to system code without applying many changes to improve performance. Now, PL/SQL uses an optimizer that can rearrange code for better performance.

The optimizer is enabled by default. In rare cases, if the overhead of the optimizer makes compilation of very large applications too slow, you can lower the optimization by setting the compilation parameter `PLSQL_OPTIMIZE_LEVEL=1` instead of its default value 2. In even rarer cases, PL/SQL might raise an exception earlier than expected or not at all. Setting `PLSQL_OPTIMIZE_LEVEL=1` prevents the code from being rearranged.

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database Reference* for information about the `PLSQL_OPTIMIZE_LEVEL` compilation parameter
- *Oracle Database Development Guide* for examples of changing the `PLSQL_OPTIMIZE_LEVEL` compilation parameter
- *Oracle Database Reference* for information about the static dictionary view `ALL_PLSQL_OBJECT_SETTINGS`

Subprogram Inlining

One optimization that the compiler can perform is **subprogram inlining**.

Subprogram inlining replaces a subprogram invocation with a copy of the invoked subprogram (if the invoked and invoking subprograms are in the same program unit). To allow subprogram inlining, either accept the default value of the `PLSQL_OPTIMIZE_LEVEL` compilation parameter (which is 2) or set it to 3.

With `PLSQL_OPTIMIZE_LEVEL=2`, you must specify each subprogram to be inlined with the `INLINE` pragma:

```
PRAGMA INLINE (subprogram, 'YES')
```

If *`subprogram`* is overloaded, then the preceding pragma applies to every subprogram with that name.

With `PLSQL_OPTIMIZE_LEVEL=3`, the PL/SQL compiler seeks opportunities to inline subprograms. You need not specify subprograms to be inlined. However, you can use the `INLINE` pragma (with the preceding syntax) to give a subprogram a high priority for inlining, and then the compiler inlines it unless other considerations or limits make the inlining undesirable.

If a particular subprogram is inlined, performance almost always improves. However, because the compiler inlines subprograms early in the optimization process, it is possible for subprogram inlining to preclude later, more powerful optimizations.

If subprogram inlining slows the performance of a particular PL/SQL program, then use the PL/SQL hierarchical profiler to identify subprograms for which you want to turn off inlining. To turn off inlining for a subprogram, use the `INLINE` pragma:

```
PRAGMA INLINE (subprogram, 'NO')
```

The `INLINE` pragma affects only the immediately following declaration or statement, and only some kinds of statements.

When the `INLINE` pragma immediately precedes a declaration, it affects:

- Every invocation of the specified subprogram in that declaration
- Every initialization value in that declaration except the default initialization values of records

When the `INLINE` pragma immediately precedes one of these statements, the pragma affects every invocation of the specified subprogram in that statement:

- Assignment
- `CALL`

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Conditional
- CASE
- CONTINUE WHEN
- EXECUTE IMMEDIATE
- EXIT WHEN
- LOOP
- RETURN

The INLINE pragma does not affect statements that are not in the preceding list.

Multiple pragmas can affect the same declaration or statement. Each pragma applies its own effect to the statement. If PRAGMA INLINE(*subprogram*,'YES') and PRAGMA INLINE(*identifier*,'NO') have the same *subprogram*, then 'NO' overrides 'YES'. One PRAGMA INLINE(*subprogram*,'NO') overrides any number of occurrences of PRAGMA INLINE(*subprogram*,'YES'), and the order of these pragmas is not important.

See Also

- *Oracle Database Development Guide* for more information about PL/SQL hierarchical profiler
- *Oracle Database Reference* for information about the PLSQL_OPTIMIZE_LEVEL compilation parameter
- *Oracle Database Reference* for information about the static dictionary view ALL_PLSQL_OBJECT_SETTINGS

Example 13-1 Specifying that Subprogram Is To Be Inlined

In this example, if PLSQL_OPTIMIZE_LEVEL=2, the INLINE pragma affects the procedure invocations p1(1) and p1(2), but not the procedure invocations p1(3) and p1(4).

```
PROCEDURE p1 (x PLS_INTEGER) IS ...
...
PRAGMA INLINE (p1, 'YES');
x:= p1(1) + p1(2) + 17;    -- These 2 invocations to p1 are inlined
...
x:= p1(3) + p1(4) + 17;    -- These 2 invocations to p1 are not inlined
...
```

Example 13-2 Specifying that Overloaded Subprogram Is To Be Inlined

In this example, if PLSQL_OPTIMIZE_LEVEL=2, the INLINE pragma affects both functions named p2.

```
FUNCTION p2 (p boolean) return PLS_INTEGER IS ...
FUNCTION p2 (x PLS_INTEGER) return PLS_INTEGER IS ...
...
PRAGMA INLINE(p2, 'YES');
x := p2(true) + p2(3);

...
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-3 Specifying that Subprogram Is Not To Be Inlined

In this example, the `INLINE` pragma affects the procedure invocations `p1(1)` and `p1(2)`, but not the procedure invocations `p1(3)` and `p1(4)`.

```
PROCEDURE p1 (x PLS_INTEGER) IS ...
...
PRAGMA INLINE (p1, 'NO');
x:= p1(1) + p1(2) + 17;    -- These 2 invocations to p1 are not inlined
...
x:= p1(3) + p1(4) + 17;    -- These 2 invocations to p1 might be inlined
...
```

Example 13-4 PRAGMA INLINE ... 'NO' Overrides PRAGMA INLINE ... 'YES'

In this example, the second `INLINE` pragma overrides both the first and third `INLINE` pragmas.

```
PROCEDURE p1 (x PLS_INTEGER) IS ...
...
PRAGMA INLINE (p1, 'YES');
PRAGMA INLINE (p1, 'NO');
PRAGMA INLINE (p1, 'YES');
x:= p1(1) + p1(2) + 17;    -- These 2 invocations to p1 are not inlined
...
```

Candidates for Tuning

The following kinds of PL/SQL code are very likely to benefit from tuning:

- Older code that does not take advantage of new PL/SQL language features.

  > **Tip**
  >
  > Before tuning older code, benchmark the current system and profile the older subprograms that your program invokes (see "Profiling and Tracing PL/SQL Programs"). With the many automatic optimizations of the PL/SQL optimizer (described in "PL/SQL Optimizer"), you might see performance improvements before doing any tuning.

- Older dynamic SQL statements written with the `DBMS_SQL` package.

  If you know at compile time the number and data types of the input and output variables of a dynamic SQL statement, then you can rewrite the statement in native dynamic SQL, which runs noticeably faster than equivalent code that uses the `DBMS_SQL` package (especially when it can be optimized by the compiler). For more information, see PL/SQL Dynamic SQL.

- Code that spends much time processing SQL statements.

  See "Tune SQL Statements".

- Functions invoked in queries, which might run millions of times.

  See "Tune Function Invocations in Queries".

- Code that spends much time looping through query results.

  See "Tune Loops".

- Code that does many numeric computations.

  See "Tune Computation-Intensive PL/SQL Code".

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Code that spends much time processing PL/SQL statements (as opposed to issuing database definition language (DDL) statements that PL/SQL passes directly to SQL).

  See "Compiling PL/SQL Units for Native Execution".

Minimizing CPU Overhead

Topics

- Tune SQL Statements
- Tune Function Invocations in Queries
- Tune Subprogram Invocations
- Tune Loops
- Tune Computation-Intensive PL/SQL Code
- Use SQL Character Functions
- Put Least Expensive Conditional Tests First

Tune SQL Statements

The most common cause of slowness in PL/SQL programs is slow SQL statements. To make SQL statements in a PL/SQL program as efficient as possible:

- Use appropriate indexes.

  For details, see Oracle Database Performance Tuning Guide.
- Use query hints to avoid unnecessary full-table scans.

  For details, see *Oracle Database SQL Language Reference*.
- Collect current statistics on all tables, using the subprograms in the `DBMS_STATS` package.

  For details, see *Oracle Database Performance Tuning Guide*.
- Analyze the execution plans and performance of the SQL statements, using:
  - `EXPLAIN PLAN` statement

    For details, see *Oracle Database Performance Tuning Guide*.
  - SQL Trace facility with `TKPROF` utility

    For details, see *Oracle Database Performance Tuning Guide*.
- Use bulk SQL, a set of PL/SQL features that minimizes the performance overhead of the communication between PL/SQL and SQL.

  For details, see "Bulk SQL and Bulk Binding".

Tune Function Invocations in Queries

Functions invoked in queries might run millions of times. Do not invoke a function in a query unnecessarily, and make the invocation as efficient as possible.

Create a function-based index on the table in the query. The `CREATE INDEX` statement might take a while, but the query can run much faster because the function value for each row is cached.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If the query passes a column to a function, then the query cannot use user-created indexes on that column, so the query might invoke the function for every row of the table (which might be very large). To minimize the number of function invocations, use a nested query. Have the inner query filter the result set to a small number of rows, and have the outer query invoke the function for only those rows.

See Also

- *Oracle Database SQL Language Reference* for more information about `CREATE INDEX` statement syntax
- "PL/SQL Function Result Cache" for information about caching the results of PL/SQL functions

Example 13-5 Nested Query Improves Performance

In this example, the two queries produce the same result set, but the second query is more efficient than the first. (In the example, the times and time difference are very small, because the `EMPLOYEES` table is very small. For a very large table, they would be significant.)

```
DECLARE
  starting_time  TIMESTAMP WITH TIME ZONE;
  ending_time    TIMESTAMP WITH TIME ZONE;
BEGIN
  -- Invokes SQRT for every row of employees table:

  SELECT SYSTIMESTAMP INTO starting_time FROM DUAL;

  FOR item IN (
    SELECT DISTINCT(SQRT(department_id)) col_alias
    FROM employees
    ORDER BY col_alias
  )
  LOOP
    DBMS_OUTPUT.PUT_LINE('Square root of dept. ID = ' || item.col_alias);
  END LOOP;

  SELECT SYSTIMESTAMP INTO ending_time FROM DUAL;

  DBMS_OUTPUT.PUT_LINE('Time = ' || TO_CHAR(ending_time - starting_time));

  -- Invokes SQRT for every distinct department_id of employees table:

  SELECT SYSTIMESTAMP INTO starting_time FROM DUAL;

  FOR item IN (
    SELECT SQRT(department_id) col_alias
    FROM (SELECT DISTINCT department_id FROM employees)
    ORDER BY col_alias
  )
  LOOP
    IF item.col_alias IS NOT NULL THEN
      DBMS_OUTPUT.PUT_LINE('Square root of dept. ID = ' || item.col_alias);
    END IF;
  END LOOP;

  SELECT SYSTIMESTAMP INTO ending_time FROM DUAL;

  DBMS_OUTPUT.PUT_LINE('Time = ' || TO_CHAR(ending_time - starting_time));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result is similar to:

```
Square root of dept. ID = 3.162277660168379331998893544432718533372
Square root of dept. ID = 4.472135954999579392818347337462552470088
Square root of dept. ID = 5.477225575051661134569697828008021339530
Square root of dept. ID = 6.324555320336758663997787088865437067440
Square root of dept. ID = 7.071067811865475244008443621048490392850
Square root of dept. ID = 7.745966692414833770358530799564799221670
Square root of dept. ID = 8.366600265340755479781720257851874893930
Square root of dept. ID = 8.944271909999158785636694674925104941760
Square root of dept. ID = 9.486832980505137995996680633298155601160
Square root of dept. ID = 10
Square root of dept. ID = 10.488088481701515469914535136799375984750
Time = +000000000 00:00:00.046000000
Square root of dept. ID = 3.162277660168379331998893544432718533372
Square root of dept. ID = 4.472135954999579392818347337462552470088
Square root of dept. ID = 5.477225575051661134569697828008021339530
Square root of dept. ID = 6.324555320336758663997787088865437067440
Square root of dept. ID = 7.071067811865475244008443621048490392850
Square root of dept. ID = 7.745966692414833770358530799564799221670
Square root of dept. ID = 8.366600265340755479781720257851874893930
Square root of dept. ID = 8.944271909999158785636694674925104941760
Square root of dept. ID = 9.486832980505137995996680633298155601160
Square root of dept. ID = 10
Square root of dept. ID = 10.488088481701515469914535136799375984750
Time = +000000000 00:00:00.000000000
```

Tune Subprogram Invocations

If a subprogram has `OUT` or `IN OUT` parameters, you can sometimes decrease its invocation overhead by declaring those parameters with the `NOCOPY` hint.

When `OUT` or `IN OUT` parameters represent large data structures such as collections, records, and instances of ADTs, copying them slows execution and increases memory use—especially for an instance of an ADT.

For each invocation of an ADT method, PL/SQL copies every attribute of the ADT. If the method is exited normally, then PL/SQL applies any changes that the method made to the attributes. If the method is exited with an unhandled exception, then PL/SQL does not change the attributes.

If your program does not require that an `OUT` or `IN OUT` parameter retain its pre-invocation value if the subprogram ends with an unhandled exception, then include the `NOCOPY` hint in the parameter declaration. The `NOCOPY` hint requests (but does not ensure) that the compiler pass the corresponding actual parameter by reference instead of value.

> **⚠ Caution**
>
> Do not rely on `NOCOPY` (which the compiler might or might not obey for a particular invocation) to ensure that an actual parameter or ADT attribute retains its pre-invocation value if the subprogram is exited with an unhandled exception. Instead, ensure that the subprogram handle all exceptions.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> - "NOCOPY" for more information about NOCOPY hint
> - *Oracle Database Object-Relational Developer's Guide* for information about using NOCOPY with member methods of ADTs

Example 13-6 NOCOPY Subprogram Parameters

In this example, if the compiler obeys the NOCOPY hint for the invocation of do_nothing2, then the invocation of do_nothing2 is faster than the invocation of do_nothing1.

```
DECLARE
  TYPE EmpTabTyp IS TABLE OF employees%ROWTYPE;
  emp_tab EmpTabTyp := EmpTabTyp(NULL);  -- initialize
  t1 NUMBER;
  t2 NUMBER;
  t3 NUMBER;

  PROCEDURE get_time (t OUT NUMBER) IS
  BEGIN
    t := DBMS_UTILITY.get_time;
  END;

  PROCEDURE do_nothing1 (tab IN OUT EmpTabTyp) IS
  BEGIN
    NULL;
  END;

  PROCEDURE do_nothing2 (tab IN OUT NOCOPY EmpTabTyp) IS
  BEGIN
    NULL;
  END;

BEGIN
  SELECT * INTO emp_tab(1)
  FROM employees
  WHERE employee_id = 100;

  emp_tab.EXTEND(49999, 1);  -- Copy element 1 into 2..50000
  get_time(t1);
  do_nothing1(emp_tab);  -- Pass IN OUT parameter
  get_time(t2);
  do_nothing2(emp_tab);  -- Pass IN OUT NOCOPY parameter
  get_time(t3);
  DBMS_OUTPUT.PUT_LINE ('Call Duration (secs)');
  DBMS_OUTPUT.PUT_LINE ('--------------------');
  DBMS_OUTPUT.PUT_LINE ('Just IN OUT: ' || TO_CHAR((t2 - t1)/100.0));
  DBMS_OUTPUT.PUT_LINE ('With NOCOPY: ' || TO_CHAR((t3 - t2))/100.0);
END;
/
```

Tune Loops

Because PL/SQL applications are often built around loops, it is important to optimize both the loops themselves and the code inside them.

If you must loop through a result set more than once, or issue other queries as you loop through a result set, you might be able to change the original query to give you exactly the

Copyright © 1996, 2025, Oracle and/or its affiliates.

results you want. Explore the SQL set operators that let you combine multiple queries, described in *Oracle Database SQL Language Reference*.

You can also use subqueries to do the filtering and sorting in multiple stages—see "Processing Query Result Sets with Subqueries".

> **See Also**
>
> "Bulk SQL and Bulk Binding"

Tune Computation-Intensive PL/SQL Code

These recommendations apply especially (but not only) to computation-intensive PL/SQL code.

Topics

- Use Data Types that Use Hardware Arithmetic
- Avoid Constrained Subtypes in Performance-Critical Code
- Minimize Implicit Data Type Conversion

Use Data Types that Use Hardware Arithmetic

Avoid using data types in the `NUMBER` data type family (described in "NUMBER Data Type Family"). These data types are represented internally in a format designed for portability and arbitrary scale and precision, not for performance. Operations on data of these types use library arithmetic, while operations on data of the types `PLS_INTEGER`, `BINARY_FLOAT` and `BINARY_DOUBLE` use hardware arithmetic.

For local integer variables, use `PLS_INTEGER`, described in "PLS_INTEGER and BINARY_INTEGER Data Types". For variables used in performance-critical code, that can never have the value `NULL`, and do not need overflow checking, use `SIMPLE_INTEGER`, described in "SIMPLE_INTEGER Subtype of PLS_INTEGER".

For floating-point variables, use `BINARY_FLOAT` or `BINARY_DOUBLE`, described in *Oracle Database SQL Language Reference*. For variables used in performance-critical code, that can never have the value `NULL`, and that do not need overflow checking, use `SIMPLE_FLOAT` or `SIMPLE_DOUBLE`, explained in "Additional PL/SQL Subtypes of BINARY_FLOAT and BINARY_DOUBLE".

> **Note**
>
> `BINARY_FLOAT` and `BINARY_DOUBLE` and their subtypes are less suitable for financial code where accuracy is critical, because they do not always represent fractional values precisely, and handle rounding differently than the `NUMBER` types.

Many SQL numeric functions (described in *Oracle Database SQL Language Reference*) are overloaded with versions that accept `BINARY_FLOAT` and `BINARY_DOUBLE` parameters. You can speed up computation-intensive code by passing variables of these data types to such functions, and by invoking the conversion functions `TO_BINARY_FLOAT` (described in *Oracle*

Copyright © 1996, 2025, Oracle and/or its affiliates.

Database SQL Language Reference) and `TO_BINARY_DOUBLE` (described in *Oracle Database SQL Language Reference*) when passing expressions to such functions.

Avoid Constrained Subtypes in Performance-Critical Code

In performance-critical code, avoid constrained subtypes (described in "Constrained Subtypes"). Each assignment to a variable or parameter of a constrained subtype requires extra checking at run time to ensure that the value to be assigned does not violate the constraint.

> **See Also**
>
> PL/SQL Predefined Data Types includes predefined constrained subtypes

Minimize Implicit Data Type Conversion

At run time, PL/SQL converts between different data types implicitly (automatically) if necessary. For example, if you assign a `PLS_INTEGER` variable to a `NUMBER` variable, then PL/SQL converts the `PLS_INTEGER` value to a `NUMBER` value (because the internal representations of the values differ).

Whenever possible, minimize implicit conversions. For example:

- If a variable is to be either inserted into a table column or assigned a value from a table column, then give the variable the same data type as the table column.

  > **Tip**
  >
  > Declare the variable with the `%TYPE` attribute, described in "%TYPE Attribute".

- Make each literal the same data type as the variable to which it is assigned or the expression in which it appears.
- Convert values from SQL data types to PL/SQL data types and then use the converted values in expressions.

  For example, convert `NUMBER` values to `PLS_INTEGER` values and then use the `PLS_INTEGER` values in expressions. `PLS_INTEGER` operations use hardware arithmetic, so they are faster than `NUMBER` operations, which use library arithmetic. For more information about the `PLS_INTEGER` data type, see "PLS_INTEGER and BINARY_INTEGER Data Types".
- Before assigning a value of one SQL data type to a variable of another SQL data type, explicitly convert the source value to the target data type, using a SQL conversion function (for information about SQL conversion functions, see *Oracle Database SQL Language Reference*).
- Overload your subprograms with versions that accept parameters of different data types and optimize each version for its parameter types. For information about overloaded subprograms, see "Overloaded Subprograms".

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database SQL Language Reference* for information about implicit conversion of SQL data types (which are also PL/SQL data types)
- "Subtypes with Base Types in Same Data Type Family"

Use SQL Character Functions

SQL has many highly optimized character functions, which use low-level code that is more efficient than PL/SQL code. Use these functions instead of writing PL/SQL code to do the same things.

See

- *Oracle Database SQL Language Reference* for information about SQL character functions that return character values
- *Oracle Database SQL Language Reference* for information about SQL character functions that return NLS character values
- *Oracle Database SQL Language Reference* for information about SQL character functions that return number values
- Example 7-6 for an example of PL/SQL code that uses SQL character function `REGEXP_LIKE`

Put Least Expensive Conditional Tests First

PL/SQL stops evaluating a logical expression as soon as it can determine the result. Take advantage of this short-circuit evaluation by putting the conditions that are least expensive to evaluate first in logical expressions whenever possible. For example, test the values of PL/SQL variables before testing function return values, so that if the variable tests fail, PL/SQL need not invoke the functions:

```
IF boolean_variable OR (number > 10) OR boolean_function(parameter) THEN ...
```

See Also

"Short-Circuit Evaluation"

Bulk SQL and Bulk Binding

Bulk SQL minimizes the performance overhead of the communication between PL/SQL and SQL. The PL/SQL features that comprise bulk SQL are the `FORALL` statement and the `BULK COLLECT` clause. Assigning values to PL/SQL variables that appear in SQL statements is called **binding**.

PL/SQL and SQL communicate as follows: To run a `SELECT INTO` or DML statement, the PL/SQL engine sends the query or DML statement to the SQL engine. The SQL engine runs the query or DML statement and returns the result to the PL/SQL engine.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The FORALL statement sends DML statements from PL/SQL to SQL in batches rather than one at a time. The BULK COLLECT clause returns results from SQL to PL/SQL in batches rather than one at a time. If a query or DML statement affects four or more database rows, then bulk SQL can significantly improve performance.

> **Note**
>
> You cannot perform bulk SQL on remote tables.

PL/SQL binding operations fall into these categories:

Binding Category	When This Binding Occurs
In-bind	When an INSERT, UPDATE, or MERGE statement stores a PL/SQL or host variable in the database
Out-bind	When the RETURNING INTO clause of an INSERT, UPDATE, MERGE, or DELETE statement assigns a database value to a PL/SQL or host variable
DEFINE	When a SELECT or FETCH statement assigns a database value to a PL/SQL or host variable

For in-binds and out-binds, bulk SQL uses **bulk binding**; that is, it binds an entire collection of values at once. For a collection of *n* elements, bulk SQL uses a single operation to perform the equivalent of *n* SELECT INTO or DML statements. A query that uses bulk SQL can return any number of rows, without using a FETCH statement for each one.

> **Note**
>
> Parallel DML is disabled with bulk SQL.

Topics

- FORALL Statement
- BULK COLLECT Clause
- Using FORALL Statement and BULK COLLECT Clause Together
- Client Bulk-Binding of Host Arrays

FORALL Statement

The FORALL statement, a feature of bulk SQL, sends DML statements from PL/SQL to SQL in batches rather than one at a time.

To understand the FORALL statement, first consider the FOR LOOP statement in Example 13-7. It sends these DML statements from PL/SQL to SQL one at a time:

```
DELETE FROM employees_temp WHERE department_id = 10;
DELETE FROM employees_temp WHERE department_id = 30;
DELETE FROM employees_temp WHERE department_id = 70;
```

Now consider the FORALL statement in Example 13-8. It sends the same three DML statements from PL/SQL to SQL as a batch.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A FORALL statement is usually much faster than an equivalent FOR LOOP statement. However, a FOR LOOP statement can contain multiple DML statements, while a FORALL statement can contain only one. The batch of DML statements that a FORALL statement sends to SQL differ only in their VALUES and WHERE clauses. The values in those clauses must come from existing, populated collections.

> **Note**
>
> The DML statement in a FORALL statement can reference multiple collections, but performance benefits apply only to collection references that use the FORALL index variable as an index.

Example 13-9 inserts the same collection elements into two database tables, using a FOR LOOP statement for the first table and a FORALL statement for the second table and showing how long each statement takes. (Times vary from run to run.)

In Example 13-10, the FORALL statement applies to a subset of a collection.

Topics

- Using FORALL Statements for Sparse Collections
- Unhandled Exceptions in FORALL Statements
- Handling FORALL Exceptions Immediately
- Handling FORALL Exceptions After FORALL Statement Completes
- Getting Number of Rows Affected by FORALL Statement

> **See Also**
>
> - "FORALL Statement" for its complete syntax and semantics, including restrictions
> - "Implicit Cursors" for information about implicit cursor attributes in general and other implicit cursor attributes that you can use with the FORALL statement

Example 13-7 DELETE Statement in FOR LOOP Statement

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS SELECT * FROM employees;

DECLARE
  TYPE NumList IS VARRAY(20) OF NUMBER;
  depts NumList := NumList(10, 30, 70);  -- department numbers
BEGIN
  FOR i IN depts.FIRST..depts.LAST LOOP
    DELETE FROM employees_temp
    WHERE department_id = depts(i);
  END LOOP;
END;
/
```

Example 13-8 DELETE Statement in FORALL Statement

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS SELECT * FROM employees;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DECLARE
  TYPE NumList IS VARRAY(20) OF NUMBER;
  depts NumList := NumList(10, 30, 70);  -- department numbers
BEGIN
  FORALL i IN depts.FIRST..depts.LAST
    DELETE FROM employees_temp
    WHERE department_id = depts(i);
END;
/
```

Example 13-9 Time Difference for INSERT Statement in FOR LOOP and FORALL Statements

```
DROP TABLE parts1;
CREATE TABLE parts1 (
  pnum INTEGER,
  pname VARCHAR2(15)
);

DROP TABLE parts2;
CREATE TABLE parts2 (
  pnum INTEGER,
  pname VARCHAR2(15)
);

DECLARE
  TYPE NumTab IS TABLE OF parts1.pnum%TYPE INDEX BY PLS_INTEGER;
  TYPE NameTab IS TABLE OF parts1.pname%TYPE INDEX BY PLS_INTEGER;
  pnums   NumTab;
  pnames  NameTab;
  iterations  CONSTANT PLS_INTEGER := 50000;
  t1  INTEGER;
  t2  INTEGER;
  t3  INTEGER;
BEGIN
  FOR j IN 1..iterations LOOP  -- populate collections
    pnums(j) := j;
    pnames(j) := 'Part No. ' || TO_CHAR(j);
  END LOOP;

  t1 := DBMS_UTILITY.get_time;

  FOR i IN 1..iterations LOOP
    INSERT INTO parts1 (pnum, pname)
    VALUES (pnums(i), pnames(i));
  END LOOP;

  t2 := DBMS_UTILITY.get_time;

  FORALL i IN 1..iterations
    INSERT INTO parts2 (pnum, pname)
    VALUES (pnums(i), pnames(i));

  t3 := DBMS_UTILITY.get_time;

  DBMS_OUTPUT.PUT_LINE('Execution Time (secs)');
  DBMS_OUTPUT.PUT_LINE('---------------------');
  DBMS_OUTPUT.PUT_LINE('FOR LOOP: ' || TO_CHAR((t2 - t1)/100));
  DBMS_OUTPUT.PUT_LINE('FORALL:   ' || TO_CHAR((t3 - t2)/100));
  COMMIT;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result is similar to:

```
Execution Time (secs)
---------------------
FOR LOOP: 5.97
FORALL:   .07

PL/SQL procedure successfully completed.
```

Example 13-10 FORALL Statement for Subset of Collection

```
DROP TABLE employees_temp;
CREATE TABLE employees_temp AS SELECT * FROM employees;

DECLARE
  TYPE NumList IS VARRAY(10) OF NUMBER;
  depts NumList := NumList(5,10,20,30,50,55,57,60,70,75);
BEGIN
  FORALL j IN 4..7
    DELETE FROM employees_temp WHERE department_id = depts(j);
END;
/
```

Using FORALL Statements for Sparse Collections

If the `FORALL` statement bounds clause references a sparse collection, then specify only existing index values, using either the `INDICES OF` or `VALUES OF` clause.

You can use `INDICES OF` for any collection except an associative array indexed by string. You can use `VALUES OF` only for a collection of `PLS_INTEGER` elements indexed by `PLS_INTEGER`.

A collection of `PLS_INTEGER` elements indexed by `PLS_INTEGER` can be an **index collection**; that is, a collection of pointers to elements of another collection (the **indexed collection**).

Index collections are useful for processing different subsets of the same collection with different `FORALL` statements. Instead of copying elements of the original collection into new collections that represent the subsets (which can use significant time and memory), represent each subset with an index collection and then use each index collection in the `VALUES OF` clause of a different `FORALL` statement.

> **See Also**
>
> "Sparse Collections and SQL%BULK_EXCEPTIONS"

Example 13-11 FORALL Statements for Sparse Collection and Its Subsets

This example uses a `FORALL` statement with the `INDICES OF` clause to populate a table with the elements of a sparse collection. Then it uses two `FORALL` statements with `VALUES OF` clauses to populate two tables with subsets of a collection.

```
DROP TABLE valid_orders;
CREATE TABLE valid_orders (
  cust_name  VARCHAR2(32),
  amount     NUMBER(10,2)
);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DROP TABLE big_orders;
CREATE TABLE big_orders AS
  SELECT * FROM valid_orders
  WHERE 1 = 0;

DROP TABLE rejected_orders;
CREATE TABLE rejected_orders AS
  SELECT * FROM valid_orders
  WHERE 1 = 0;

DECLARE
  SUBTYPE cust_name IS valid_orders.cust_name%TYPE;
  TYPE cust_typ IS TABLE OF cust_name;
  cust_tab  cust_typ;  -- Collection of customer names

  SUBTYPE order_amount IS valid_orders.amount%TYPE;
  TYPE amount_typ IS TABLE OF NUMBER;
  amount_tab  amount_typ;  -- Collection of order amounts

  TYPE index_pointer_t IS TABLE OF PLS_INTEGER;

  /* Collections for pointers to elements of cust_tab collection
     (to represent two subsets of cust_tab): */

  big_order_tab       index_pointer_t := index_pointer_t();
  rejected_order_tab  index_pointer_t := index_pointer_t();

  PROCEDURE populate_data_collections IS
  BEGIN
    cust_tab := cust_typ(
      'Company1','Company2','Company3','Company4','Company5'
    );

    amount_tab := amount_typ(5000.01, 0, 150.25, 4000.00, NULL);
  END;

BEGIN
  populate_data_collections;

  DBMS_OUTPUT.PUT_LINE ('--- Original order data ---');

  FOR i IN 1..cust_tab.LAST LOOP
    DBMS_OUTPUT.PUT_LINE (
      'Customer #' || i || ', ' || cust_tab(i) || ': $' || amount_tab(i)
    );
  END LOOP;

  -- Delete invalid orders:

  FOR i IN 1..cust_tab.LAST LOOP
    IF amount_tab(i) IS NULL OR amount_tab(i) = 0 THEN
      cust_tab.delete(i);
      amount_tab.delete(i);
    END IF;
  END LOOP;

  -- cust_tab is now a sparse collection.

  DBMS_OUTPUT.PUT_LINE ('--- Order data with invalid orders deleted ---');

  FOR i IN 1..cust_tab.LAST LOOP
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    IF cust_tab.EXISTS(i) THEN
      DBMS_OUTPUT.PUT_LINE (
        'Customer #' || i || ', ' || cust_tab(i) || ': $' || amount_tab(i)
      );
    END IF;
  END LOOP;

  -- Using sparse collection, populate valid_orders table:

  FORALL i IN INDICES OF cust_tab
    INSERT INTO valid_orders (cust_name, amount)
    VALUES (cust_tab(i), amount_tab(i));

  populate_data_collections;  -- Restore original order data

  -- cust_tab is a dense collection again.

  /* Populate collections of pointers to elements of cust_tab collection
     (which represent two subsets of cust_tab): */

  FOR i IN cust_tab.FIRST .. cust_tab.LAST LOOP
    IF amount_tab(i) IS NULL OR amount_tab(i) = 0 THEN
      rejected_order_tab.EXTEND;
      rejected_order_tab(rejected_order_tab.LAST) := i;
    END IF;

    IF amount_tab(i) > 2000 THEN
      big_order_tab.EXTEND;
      big_order_tab(big_order_tab.LAST) := i;
    END IF;
  END LOOP;

  /* Using each subset in a different FORALL statement,
     populate rejected_orders and big_orders tables: */

  FORALL i IN VALUES OF rejected_order_tab
    INSERT INTO rejected_orders (cust_name, amount)
    VALUES (cust_tab(i), amount_tab(i));

  FORALL i IN VALUES OF big_order_tab
    INSERT INTO big_orders (cust_name, amount)
    VALUES (cust_tab(i), amount_tab(i));
END;
/
```

Result:

```
--- Original order data ---
Customer #1, Company1: $5000.01
Customer #2, Company2: $0
Customer #3, Company3: $150.25
Customer #4, Company4: $4000
Customer #5, Company5: $
--- Data with invalid orders deleted ---
Customer #1, Company1: $5000.01
Customer #3, Company3: $150.25
Customer #4, Company4: $4000
```

Verify that correct order details were stored:

```
SELECT cust_name "Customer", amount "Valid order amount"
FROM valid_orders
ORDER BY cust_name;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Customer                       Valid order amount
------------------------------ ------------------
Company1                                 5000.01
Company3                                  150.25
Company4                                    4000

3 rows selected.
```

Query:

```
SELECT cust_name "Customer", amount "Big order amount"
FROM big_orders
ORDER BY cust_name;
```

Result:

```
Customer                       Big order amount
------------------------------ ---------------
Company1                              5000.01
Company4                                 4000

2 rows selected.
```

Query:

```
SELECT cust_name "Customer", amount "Rejected order amount"
FROM rejected_orders
ORDER BY cust_name;
```

Result:

```
Customer                       Rejected order amount
------------------------------ ---------------------
Company2                                           0
Company5

2 rows selected.
```

Unhandled Exceptions in FORALL Statements

In a `FORALL` statement without the `SAVE EXCEPTIONS` clause, if one DML statement raises an unhandled exception, then PL/SQL stops the `FORALL` statement and rolls back all changes made by previous DML statements.

For example, the `FORALL` statement in Example 13-8 processes these DML statements in this order, unless one of them raises an unhandled exception:

```
DELETE FROM employees_temp WHERE department_id = depts(10);
DELETE FROM employees_temp WHERE department_id = depts(30);
DELETE FROM employees_temp WHERE department_id = depts(70);
```

If the third statement raises an unhandled exception, then PL/SQL rolls back the changes that the first and second statements made. If the second statement raises an unhandled exception, then PL/SQL rolls back the changes that the first statement made and never runs the third statement.

You can handle exceptions raised in a `FORALL` statement in either of these ways:

- As each exception is raised (see "Handling FORALL Exceptions Immediately")

Copyright © 1996, 2025, Oracle and/or its affiliates.

- After the FORALL statement completes execution, by including the SAVE EXCEPTIONS clause (see "Handling FORALL Exceptions After FORALL Statement Completes")

Handling FORALL Exceptions Immediately

To handle exceptions raised in a FORALL statement immediately, omit the SAVE EXCEPTIONS clause and write the appropriate exception handlers.

If one DML statement raises a handled exception, then PL/SQL rolls back the changes made by that statement, but does not roll back changes made by previous DML statements.

In Example 13-12, the FORALL statement is designed to run three UPDATE statements. However, the second one raises an exception. An exception handler handles the exception, displaying the error message and committing the change made by the first UPDATE statement. The third UPDATE statement never runs.

For information about exception handlers, see PL/SQL Error Handling.

Example 13-12 Handling FORALL Exceptions Immediately

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp (
  deptno NUMBER(2),
  job VARCHAR2(18)
);

CREATE OR REPLACE PROCEDURE p AUTHID DEFINER AS
  TYPE NumList IS TABLE OF NUMBER;

  depts          NumList := NumList(10, 20, 30);
  error_message  VARCHAR2(100);

BEGIN
  -- Populate table:

  INSERT INTO emp_temp (deptno, job) VALUES (10, 'Clerk');
  INSERT INTO emp_temp (deptno, job) VALUES (20, 'Bookkeeper');
  INSERT INTO emp_temp (deptno, job) VALUES (30, 'Analyst');
  COMMIT;

  -- Append 9-character string to each job:

  FORALL j IN depts.FIRST..depts.LAST
    UPDATE emp_temp SET job = job || ' (Senior)'
    WHERE deptno = depts(j);

EXCEPTION
  WHEN OTHERS THEN
    error_message := SQLERRM;
    DBMS_OUTPUT.PUT_LINE (error_message);

    COMMIT;  -- Commit results of successful updates
    RAISE;
END;
/
```

Result:

```
Procedure created.
```

Invoke procedure:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  p;
END;
/
```

Result:

```
ORA-12899: value too large for column "HR"."EMP_TEMP"."JOB" (actual: 19,
maximum: 18)
BEGIN
*
ERROR at line 1:
ORA-12899: value too large for column "HR"."EMP_TEMP"."JOB" (actual: 19,
maximum: 18)
ORA-06512: at "HR.P", line 27
ORA-06512: at line 2
```

Query:

```
SELECT * FROM emp_temp;
```

Result:

```
    DEPTNO JOB
---------- ------------------
        10 Clerk (Senior)
        20 Bookkeeper
        30 Analyst

3 rows selected.
```

Handling FORALL Exceptions After FORALL Statement Completes

To allow a `FORALL` statement to continue even if some of its DML statements fail, include the `SAVE EXCEPTIONS` clause. When a DML statement fails, PL/SQL does not raise an exception; instead, it saves information about the failure. After the `FORALL` statement completes, PL/SQL raises a single exception for the `FORALL` statement (ORA-24381).

In the exception handler for ORA-24381, you can get information about each individual DML statement failure from the implicit cursor attribute `SQL%BULK_EXCEPTIONS`.

`SQL%BULK_EXCEPTIONS` is like an associative array of information about the DML statements that failed during the most recently run `FORALL` statement.

`SQL%BULK_EXCEPTIONS.COUNT` is the number of DML statements that failed. If `SQL%BULK_EXCEPTIONS.COUNT` is not zero, then for each index value *i* from 1 through `SQL%BULK_EXCEPTIONS.COUNT`:

- `SQL%BULK_EXCEPTIONS(i).ERROR_INDEX` is the number of the DML statement that failed.
- `SQL%BULK_EXCEPTIONS(i).ERROR_CODE` is the Oracle Database error code for the failure.

For example, if a `FORALL SAVE EXCEPTIONS` statement runs 100 DML statements, and the tenth and sixty-fourth ones fail with error codes ORA-12899 and ORA-19278, respectively, then:

- `SQL%BULK_EXCEPTIONS.COUNT` = 2
- `SQL%BULK_EXCEPTIONS(1).ERROR_INDEX` = 10
- `SQL%BULK_EXCEPTIONS(1).ERROR_CODE` = 12899
- `SQL%BULK_EXCEPTIONS(2).ERROR_INDEX` = 64

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SQL%BULK_EXCEPTIONS(2).ERROR_CODE = 19278

> **Note**
>
> After a FORALL statement *without* the SAVE EXCEPTIONS clause raises an exception, SQL%BULK_EXCEPTIONS.COUNT = 1.

With the error code, you can get the associated error message with the SQLERRM function (described in "SQLERRM Function"):

```
SQLERRM(-(SQL%BULK_EXCEPTIONS(i).ERROR_CODE))
```

However, the error message that SQLERRM returns excludes any substitution arguments (compare the error messages in Example 13-12 and Example 13-13).

Example 13-13 is like Example 13-12 except:

- The FORALL statement includes the SAVE EXCEPTIONS clause.
- The exception-handling part has an exception handler for ORA-24381, the internally defined exception that PL/SQL raises implicitly when a bulk operation raises and saves exceptions. The example gives ORA-24381 the user-defined name dml_errors.
- The exception handler for dml_errors uses SQL%BULK_EXCEPTIONS and SQLERRM (and some local variables) to show the error message and which statement, collection item, and string caused the error.

Example 13-13 Handling FORALL Exceptions After FORALL Statement Completes

```
CREATE OR REPLACE PROCEDURE p AUTHID DEFINER AS
  TYPE NumList IS TABLE OF NUMBER;
  depts        NumList := NumList(10, 20, 30);

  error_message  VARCHAR2(100);
  bad_stmt_no    PLS_INTEGER;
  bad_deptno     emp_temp.deptno%TYPE;
  bad_job        emp_temp.job%TYPE;

  dml_errors  EXCEPTION;
  PRAGMA EXCEPTION_INIT(dml_errors, -24381);
BEGIN
  -- Populate table:

  INSERT INTO emp_temp (deptno, job) VALUES (10, 'Clerk');
  INSERT INTO emp_temp (deptno, job) VALUES (20, 'Bookkeeper');
  INSERT INTO emp_temp (deptno, job) VALUES (30, 'Analyst');
  COMMIT;

  -- Append 9-character string to each job:

  FORALL j IN depts.FIRST..depts.LAST SAVE EXCEPTIONS
    UPDATE emp_temp SET job = job || ' (Senior)'
    WHERE deptno = depts(j);

EXCEPTION
  WHEN dml_errors THEN
    FOR i IN 1..SQL%BULK_EXCEPTIONS.COUNT LOOP
      error_message := SQLERRM(-(SQL%BULK_EXCEPTIONS(i).ERROR_CODE));
      DBMS_OUTPUT.PUT_LINE (error_message);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      bad_stmt_no := SQL%BULK_EXCEPTIONS(i).ERROR_INDEX;
      DBMS_OUTPUT.PUT_LINE('Bad statement #: ' || bad_stmt_no);

      bad_deptno := depts(bad_stmt_no);
      DBMS_OUTPUT.PUT_LINE('Bad department #: ' || bad_deptno);

      SELECT job INTO bad_job FROM emp_temp WHERE deptno = bad_deptno;

      DBMS_OUTPUT.PUT_LINE('Bad job: ' || bad_job);
    END LOOP;

    COMMIT;  -- Commit results of successful updates

    WHEN OTHERS THEN
      DBMS_OUTPUT.PUT_LINE('Unrecognized error.');
      RAISE;
END;
/
```

Result:

```
Procedure created.
```

Invoke procedure:

```
BEGIN
  p;
END;
/
```

Result:

```
ORA-12899: value too large for column  (actual: , maximum: )
Bad statement #: 2
Bad department #: 20
Bad job: Bookkeeper

PL/SQL procedure successfully completed.
```

Query:

```
SELECT * FROM emp_temp;
```

Result:

```
    DEPTNO JOB
---------- ------------------
        10 Clerk (Senior)
        20 Bookkeeper
        30 Analyst (Senior)

3 rows selected.
```

Sparse Collections and SQL%BULK_EXCEPTIONS

If the `FORALL` statement bounds clause references a sparse collection, then to find the collection element that caused a DML statement to fail, you must step through the elements one by one until you find the element whose index is `SQL%BULK_EXCEPTIONS(i).ERROR_INDEX`. Then, if the `FORALL` statement uses the `VALUES OF` clause to reference a collection of pointers into another collection, you must find the element of the other collection whose index is `SQL%BULK_EXCEPTIONS(i).ERROR_INDEX`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Getting Number of Rows Affected by FORALL Statement

After a FORALL statement completes, you can get the number of rows that each DML statement affected from the implicit cursor attribute SQL%BULK_ROWCOUNT.

To get the total number of rows affected by the FORALL statement, use the implicit cursor attribute SQL%ROWCOUNT, described in "SQL%ROWCOUNT Attribute: How Many Rows Were Affected?".

SQL%BULK_ROWCOUNT is like an associative array whose *i*th element is the number of rows affected by the *i*th DML statement in the most recently completed FORALL statement. The data type of the element is INTEGER.

> **Note**
>
> If a server is Oracle Database 12c or later and its client is Oracle Database 11g release 2 or earlier (or the reverse), then the maximum number that SQL%BULK_ROWCOUNT returns is 4,294,967,295.

Example 13-14 uses SQL%BULK_ROWCOUNT to show how many rows each DELETE statement in the FORALL statement deleted and SQL%ROWCOUNT to show the total number of rows deleted.

Example 13-15 uses SQL%BULK_ROWCOUNT to show how many rows each INSERT SELECT construct in the FORALL statement inserted and SQL%ROWCOUNT to show the total number of rows inserted.

Example 13-14 Showing Number of Rows Affected by Each DELETE in FORALL

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp AS SELECT * FROM employees;

DECLARE
  TYPE NumList IS TABLE OF NUMBER;
  depts NumList := NumList(30, 50, 60);
BEGIN
  FORALL j IN depts.FIRST..depts.LAST
    DELETE FROM emp_temp WHERE department_id = depts(j);

  FOR i IN depts.FIRST..depts.LAST LOOP
    DBMS_OUTPUT.PUT_LINE (
      'Statement #' || i || ' deleted ' ||
      SQL%BULK_ROWCOUNT(i) || ' rows.'
    );
  END LOOP;

  DBMS_OUTPUT.PUT_LINE('Total rows deleted: ' || SQL%ROWCOUNT);
END;
/
```

Result:

```
Statement #1 deleted 6 rows.
Statement #2 deleted 45 rows.
Statement #3 deleted 5 rows.
Total rows deleted: 56
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-15 Showing Number of Rows Affected by Each INSERT SELECT in FORALL

```
DROP TABLE emp_by_dept;
CREATE TABLE emp_by_dept AS
  SELECT employee_id, department_id
  FROM employees
  WHERE 1 = 0;

DECLARE
  TYPE dept_tab IS TABLE OF departments.department_id%TYPE;
  deptnums  dept_tab;
BEGIN
  SELECT department_id BULK COLLECT INTO deptnums FROM departments;

  FORALL i IN 1..deptnums.COUNT
    INSERT INTO emp_by_dept (employee_id, department_id)
      SELECT employee_id, department_id
      FROM employees
      WHERE department_id = deptnums(i)
      ORDER BY department_id, employee_id;

  FOR i IN 1..deptnums.COUNT LOOP
    -- Count how many rows were inserted for each department; that is,
    -- how many employees are in each department.
    DBMS_OUTPUT.PUT_LINE (
      'Dept '||deptnums(i)||': inserted '||
      SQL%BULK_ROWCOUNT(i)||' records'
    );
  END LOOP;
  DBMS_OUTPUT.PUT_LINE('Total records inserted: ' || SQL%ROWCOUNT);
END;
/
```

Result:

```
Dept 10: inserted 1 records
Dept 20: inserted 2 records
Dept 30: inserted 6 records
Dept 40: inserted 1 records
Dept 50: inserted 45 records
Dept 60: inserted 5 records
Dept 70: inserted 1 records
Dept 80: inserted 34 records
Dept 90: inserted 3 records
Dept 100: inserted 6 records
Dept 110: inserted 2 records
Dept 120: inserted 0 records
Dept 130: inserted 0 records
Dept 140: inserted 0 records
Dept 150: inserted 0 records
Dept 160: inserted 0 records
Dept 170: inserted 0 records
Dept 180: inserted 0 records
Dept 190: inserted 0 records
Dept 200: inserted 0 records
Dept 210: inserted 0 records
Dept 220: inserted 0 records
Dept 230: inserted 0 records
Dept 240: inserted 0 records
Dept 250: inserted 0 records
Dept 260: inserted 0 records
Dept 270: inserted 0 records
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Dept 280: inserted 0 records
Total records inserted: 106
```

BULK COLLECT Clause

The `BULK COLLECT` clause, a feature of bulk SQL, returns results from SQL to PL/SQL in batches rather than one at a time.

The `BULK COLLECT` clause can appear in:

- `SELECT INTO` statement
- `FETCH` statement
- `RETURNING INTO` clause of:
  - `DELETE` statement
  - `INSERT` statement
  - `UPDATE` statement
  - `MERGE` statement
  - `EXECUTE IMMEDIATE` statement

With the `BULK COLLECT` clause, each of the preceding statements retrieves an entire result set and stores it in one or more collection variables in a single operation (which is more efficient than using a loop statement to retrieve one result row at a time).

> **Note**
>
> PL/SQL processes the `BULK COLLECT` clause similar to the way it processes a `FETCH` statement inside a `LOOP` statement. PL/SQL does not raise an exception when a statement with a `BULK COLLECT` clause returns no rows. You must check the target collections for emptiness, as in Example 13-22.

Topics

- SELECT INTO Statement with BULK COLLECT Clause
- FETCH Statement with BULK COLLECT Clause
- RETURNING INTO Clause with BULK COLLECT Clause

SELECT INTO Statement with BULK COLLECT Clause

The `SELECT INTO` statement with the `BULK COLLECT` clause (also called the `SELECT BULK COLLECT INTO` statement) selects an entire result set into one or more collection variables.

For more information, see "SELECT INTO Statement".

> **Caution**
>
> The `SELECT BULK COLLECT INTO` statement is vulnerable to aliasing, which can cause unexpected results. For details, see "SELECT BULK COLLECT INTO Statements and Aliasing".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-16 uses a `SELECT BULK COLLECT INTO` statement to select two database columns into two collections (nested tables).

Example 13-17 uses a `SELECT BULK COLLECT INTO` statement to select a result set into a nested table of records.

Topics

- SELECT BULK COLLECT INTO Statements and Aliasing
- Row Limits for SELECT BULK COLLECT INTO Statements
- Guidelines for Looping Through Collections

Example 13-16 Bulk-Selecting Two Database Columns into Two Nested Tables

```
DECLARE
  TYPE NumTab IS TABLE OF employees.employee_id%TYPE;
  TYPE NameTab IS TABLE OF employees.last_name%TYPE;

  enums NumTab;
  names NameTab;

  PROCEDURE print_first_n (n POSITIVE) IS
  BEGIN
    IF enums.COUNT = 0 THEN
      DBMS_OUTPUT.PUT_LINE ('Collections are empty.');
    ELSE
      DBMS_OUTPUT.PUT_LINE ('First ' || n || ' employees:');

      FOR i IN 1 .. n LOOP
        DBMS_OUTPUT.PUT_LINE (
          '  Employee #' || enums(i) || ': ' || names(i));
      END LOOP;
    END IF;
  END;

BEGIN
  SELECT employee_id, last_name
  BULK COLLECT INTO enums, names
  FROM employees
  ORDER BY employee_id;

  print_first_n(3);
  print_first_n(6);
END;
/
```

Result:

```
First 3 employees:
Employee #100: King
Employee #101: Yang
Employee #102: Garcia
First 6 employees:
Employee #100: King
Employee #101: Yang
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Employee #102: Garcia
Employee #103: James
Employee #104: Miller
Employee #105: Williams
```

Example 13-17 Bulk-Selecting into Nested Table of Records

```
DECLARE
  CURSOR c1 IS
    SELECT first_name, last_name, hire_date
    FROM employees;

  TYPE NameSet IS TABLE OF c1%ROWTYPE;

  stock_managers  NameSet;  -- nested table of records

BEGIN
  -- Assign values to nested table of records:

  SELECT first_name, last_name, hire_date
    BULK COLLECT INTO stock_managers
    FROM employees
    WHERE job_id = 'ST_MAN'
    ORDER BY hire_date;

  -- Print nested table of records:

    FOR i IN stock_managers.FIRST .. stock_managers.LAST LOOP
      DBMS_OUTPUT.PUT_LINE (
        stock_managers(i).hire_date || ' ' ||
        stock_managers(i).last_name  || ', ' ||
        stock_managers(i).first_name
      );
    END LOOP;END;
/
```

Result:

```
01-MAY-13 Kaufling, Payam
18-JUL-14 Weiss, Matthew
10-APR-15 Fripp, Adam
10-OCT-15 Vollman, Shanta
16-NOV-17 Mourgos, Kevin
```

SELECT BULK COLLECT INTO Statements and Aliasing

In a statement of the form

```
SELECT column BULK COLLECT INTO collection FROM table ...
```

column and *collection* are analogous to `IN NOCOPY` and `OUT NOCOPY` subprogram parameters, respectively, and PL/SQL passes them by reference. As with subprogram parameters that are passed by reference, aliasing can cause unexpected results.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> "Subprogram Parameter Aliasing with Parameters Passed by Reference"

In Example 13-18, the intention is to select specific values from a collection, `numbers1`, and then store them in the same collection. The unexpected result is that all elements of `numbers1` are deleted. For workarounds, see Example 13-19 and Example 13-20.

Example 13-19 uses a cursor to achieve the result intended by Example 13-18.

Example 13-20 selects specific values from a collection, `numbers1`, and then stores them in a different collection, `numbers2`. Example 13-20 runs faster than Example 13-19.

Example 13-18 SELECT BULK COLLECT INTO Statement with Unexpected Results

```
CREATE OR REPLACE TYPE numbers_type IS
  TABLE OF INTEGER
/
CREATE OR REPLACE PROCEDURE p (i IN INTEGER) AUTHID DEFINER IS
  numbers1  numbers_type := numbers_type(1,2,3,4,5);
BEGIN
  DBMS_OUTPUT.PUT_LINE('Before SELECT statement');
  DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());

  FOR j IN 1..numbers1.COUNT() LOOP
    DBMS_OUTPUT.PUT_LINE('numbers1(' || j || ') = ' || numbers1(j));
  END LOOP;

  --Self-selecting BULK COLLECT INTO clause:

  SELECT a.COLUMN_VALUE
  BULK COLLECT INTO numbers1
  FROM TABLE(numbers1) a
  WHERE a.COLUMN_VALUE > p.i
  ORDER BY a.COLUMN_VALUE;

  DBMS_OUTPUT.PUT_LINE('After SELECT statement');
  DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());
END p;
/
```

Invoke p:

```
BEGIN
  p(2);
END;
/
```

Result:

```
Before SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
After SELECT statement
numbers1.COUNT() = 0
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
PL/SQL procedure successfully completed.
```

Invoke p:

```
BEGIN
  p(10);
END;
/
```

Result:

```
Before SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
After SELECT statement
numbers1.COUNT() = 0
```

Example 13-19 Cursor Workaround for Example 13-18

```
CREATE OR REPLACE TYPE numbers_type IS
  TABLE OF INTEGER
/
CREATE OR REPLACE PROCEDURE p (i IN INTEGER) AUTHID DEFINER IS
  numbers1  numbers_type := numbers_type(1,2,3,4,5);

  CURSOR c IS
    SELECT a.COLUMN_VALUE
    FROM TABLE(numbers1) a
    WHERE a.COLUMN_VALUE > p.i
    ORDER BY a.COLUMN_VALUE;
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Before FETCH statement');
    DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());

    FOR j IN 1..numbers1.COUNT() LOOP
      DBMS_OUTPUT.PUT_LINE('numbers1(' || j || ') = ' || numbers1(j));
    END LOOP;

  OPEN c;
  FETCH c BULK COLLECT INTO numbers1;
  CLOSE c;

  DBMS_OUTPUT.PUT_LINE('After FETCH statement');
  DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());

  IF numbers1.COUNT() > 0 THEN
    FOR j IN 1..numbers1.COUNT() LOOP
      DBMS_OUTPUT.PUT_LINE('numbers1(' || j || ') = ' || numbers1(j));
    END LOOP;
  END IF;
END p;
/
```

Invoke p:

```
BEGIN
  p(2);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
Before FETCH statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
After FETCH statement
numbers1.COUNT() = 3
numbers1(1) = 3
numbers1(2) = 4
numbers1(3) = 5
```

Invoke p:

```
BEGIN
  p(10);
END;
/
```

Result:

```
Before FETCH statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
After FETCH statement
numbers1.COUNT() = 0
```

Example 13-20 Second Collection Workaround for Example 13-18

```
CREATE OR REPLACE TYPE numbers_type IS
  TABLE OF INTEGER
/
CREATE OR REPLACE PROCEDURE p (i IN INTEGER) AUTHID DEFINER IS
  numbers1  numbers_type := numbers_type(1,2,3,4,5);
 numbers2  numbers_type := numbers_type(0,0,0,0,0);

BEGIN
  DBMS_OUTPUT.PUT_LINE('Before SELECT statement');

  DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());

  FOR j IN 1..numbers1.COUNT() LOOP
    DBMS_OUTPUT.PUT_LINE('numbers1(' || j || ') = ' || numbers1(j));
  END LOOP;

  DBMS_OUTPUT.PUT_LINE('numbers2.COUNT() = ' || numbers2.COUNT());

  FOR j IN 1..numbers2.COUNT() LOOP
    DBMS_OUTPUT.PUT_LINE('numbers2(' || j || ') = ' || numbers2(j));
  END LOOP;

  SELECT a.COLUMN_VALUE
  BULK COLLECT INTO numbers2      -- numbers2 appears here
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  FROM TABLE(numbers1) a        -- numbers1 appears here
  WHERE a.COLUMN_VALUE > p.i
  ORDER BY a.COLUMN_VALUE;

  DBMS_OUTPUT.PUT_LINE('After SELECT statement');
  DBMS_OUTPUT.PUT_LINE('numbers1.COUNT() = ' || numbers1.COUNT());

  IF numbers1.COUNT() > 0 THEN
    FOR j IN 1..numbers1.COUNT() LOOP
      DBMS_OUTPUT.PUT_LINE('numbers1(' || j || ') = ' || numbers1(j));
    END LOOP;
  END IF;

  DBMS_OUTPUT.PUT_LINE('numbers2.COUNT() = ' || numbers2.COUNT());

  IF numbers2.COUNT() > 0 THEN
    FOR j IN 1..numbers2.COUNT() LOOP
      DBMS_OUTPUT.PUT_LINE('numbers2(' || j || ') = ' || numbers2(j));
    END LOOP;
  END IF;
END p;
/
```

Invoke p:

```
BEGIN
  p(2);
 END;
/
```

Result:

```
Before SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
numbers2.COUNT() = 5
numbers2(1) = 0
numbers2(2) = 0
numbers2(3) = 0
numbers2(4) = 0
numbers2(5) = 0
After SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
numbers2.COUNT() = 3
numbers2(1) = 3
numbers2(2) = 4
numbers2(3) = 5

PL/SQL procedure successfully completed.
```

Invoke p:

```
BEGIN
  p(10);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END;
/
```

Result:

```
Before SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
numbers2.COUNT() = 5
numbers2(1) = 0
numbers2(2) = 0
numbers2(3) = 0
numbers2(4) = 0
numbers2(5) = 0
After SELECT statement
numbers1.COUNT() = 5
numbers1(1) = 1
numbers1(2) = 2
numbers1(3) = 3
numbers1(4) = 4
numbers1(5) = 5
numbers2.COUNT() = 0
```

Row Limits for SELECT BULK COLLECT INTO Statements

A `SELECT BULK COLLECT INTO` statement that returns a large number of rows produces a large collection. To limit the number of rows and the collection size, use one of these:

- `ROWNUM` pseudocolumn (described in *Oracle Database SQL Language Reference*)
- `SAMPLE` clause (described in *Oracle Database SQL Language Reference*)
- `FETCH FIRST` clause (described in *Oracle Database SQL Language Reference*)

Example 13-21 shows several ways to limit the number of rows that a `SELECT BULK COLLECT INTO` statement returns.

Example 13-21 Limiting Bulk Selection with ROWNUM, SAMPLE, and FETCH FIRST

```
DECLARE
  TYPE SalList IS TABLE OF employees.salary%TYPE;
  sals SalList;
BEGIN
  SELECT salary BULK COLLECT INTO sals FROM employees
    WHERE ROWNUM <= 50;

  SELECT salary BULK COLLECT INTO sals FROM employees
    SAMPLE (10);

  SELECT salary BULK COLLECT INTO sals FROM employees
    FETCH FIRST 50 ROWS ONLY;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Guidelines for Looping Through Collections

When a result set is stored in a collection, it is easy to loop through the rows and refer to different columns. This technique can be very fast, but also very memory-intensive. If you use it often:

- To loop once through the result set, use a cursor `FOR LOOP` (see "Processing Query Result Sets With Cursor FOR LOOP Statements").

  This technique avoids the memory overhead of storing a copy of the result set.
- Instead of looping through the result set to search for certain values or filter the results into a smaller set, do the searching or filtering in the query of the `SELECT INTO` statement.

  For example, in simple queries, use `WHERE` clauses; in queries that compare multiple result sets, use set operators such as `INTERSECT` and `MINUS`. For information about set operators, see *Oracle Database SQL Language Reference*.
- Instead of looping through the result set and running another query for each result row, use a subquery in the query of the `SELECT INTO` statement (see "Processing Query Result Sets with Subqueries").
- Instead of looping through the result set and running another DML statement for each result row, use the `FORALL` statement (see "FORALL Statement").

FETCH Statement with BULK COLLECT Clause

The `FETCH` statement with the `BULK COLLECT` clause (also called the `FETCH BULK COLLECT` statement) fetches an entire result set into one or more collection variables.

For more information, see "FETCH Statement".

Example 13-22 uses a `FETCH BULK COLLECT` statement to fetch an entire result set into two collections (nested tables).

Example 13-23 uses a `FETCH BULK COLLECT` statement to fetch a result set into a collection (nested table) of records.

Example 13-22 Bulk-Fetching into Two Nested Tables

```
DECLARE
  TYPE NameList IS TABLE OF employees.last_name%TYPE;
  TYPE SalList IS TABLE OF employees.salary%TYPE;

  CURSOR c1 IS
    SELECT last_name, salary
    FROM employees
    WHERE salary > 10000
    ORDER BY last_name;

  names  NameList;
  sals   SalList;

  TYPE RecList IS TABLE OF c1%ROWTYPE;
  recs RecList;

  v_limit PLS_INTEGER := 10;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  PROCEDURE print_results IS
  BEGIN
    -- Check if collections are empty:

    IF names IS NULL OR names.COUNT = 0 THEN
      DBMS_OUTPUT.PUT_LINE('No results!');
    ELSE
      DBMS_OUTPUT.PUT_LINE('Result: ');
      FOR i IN names.FIRST .. names.LAST
      LOOP
        DBMS_OUTPUT.PUT_LINE('  Employee ' || names(i) || ': $' || sals(i));
      END LOOP;
    END IF;
  END;

BEGIN
  DBMS_OUTPUT.PUT_LINE ('--- Processing all results simultaneously ---');
  OPEN c1;
  FETCH c1 BULK COLLECT INTO names, sals;
  CLOSE c1;
  print_results();
  DBMS_OUTPUT.PUT_LINE ('--- Processing ' || v_limit || ' rows at a time
---');
  OPEN c1;
  LOOP
    FETCH c1 BULK COLLECT INTO names, sals LIMIT v_limit;
    EXIT WHEN names.COUNT = 0;
    print_results();
  END LOOP;
  CLOSE c1;
  DBMS_OUTPUT.PUT_LINE ('--- Fetching records rather than columns ---');
  OPEN c1;
  FETCH c1 BULK COLLECT INTO recs;
  FOR i IN recs.FIRST .. recs.LAST
  LOOP
    -- Now all columns from result set come from one record
    DBMS_OUTPUT.PUT_LINE (
      '  Employee ' || recs(i).last_name || ': $' || recs(i).salary
    );
  END LOOP;
END;
/
```

Result:

```
--- Processing all results simultaneously ---
Result:
Employee Abel: $11000
Employee Cambrault: $11000
Employee Errazuriz: $12000
Employee Garcia: $17000
Employee Gruenberg: $12008
Employee Higgins: $12008
Employee King: $24000
Employee Li: $11000
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Employee Martinez: $13000
Employee Ozer: $11500
Employee Partners: $13500
Employee Singh: $14000
Employee Vishney: $10500
Employee Yang: $17000
Employee Zlotkey: $10500
--- Processing 10 rows at a time ---
Result:
Employee Abel: $11000
Employee Cambrault: $11000
Employee Errazuriz: $12000
Employee Garcia: $17000
Employee Gruenberg: $12008
Employee Higgins: $12008
Employee King: $24000
Employee Li: $11000
Employee Martinez: $13000
Employee Ozer: $11500
Result:
Employee Partners: $13500
Employee Singh: $14000
Employee Vishney: $10500
Employee Yang: $17000
Employee Zlotkey: $10500
--- Fetching records rather than columns ---
Employee Abel: $11000
Employee Cambrault: $11000
Employee Errazuriz: $12000
Employee Garcia: $17000
Employee Gruenberg: $12008
Employee Higgins: $12008
Employee King: $24000
Employee Li: $11000
Employee Martinez: $13000
Employee Ozer: $11500
Employee Partners: $13500
Employee Singh: $14000
Employee Vishney: $10500
Employee Yang: $17000
Employee Zlotkey: $10500
```

Example 13-23 Bulk-Fetching into Nested Table of Records

```
DECLARE
  CURSOR c1 IS
    SELECT first_name, last_name, hire_date
    FROM employees;

  TYPE NameSet IS TABLE OF c1%ROWTYPE;
  stock_managers  NameSet;  -- nested table of records

  TYPE cursor_var_type is REF CURSOR;
  cv cursor_var_type;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  -- Assign values to nested table of records:

  OPEN cv FOR
    SELECT first_name, last_name, hire_date
    FROM employees
    WHERE job_id = 'ST_MAN'
    ORDER BY hire_date;

  FETCH cv BULK COLLECT INTO stock_managers;
  CLOSE cv;

  -- Print nested table of records:

    FOR i IN stock_managers.FIRST .. stock_managers.LAST LOOP
      DBMS_OUTPUT.PUT_LINE (
        stock_managers(i).hire_date || ' ' ||
        stock_managers(i).last_name  || ', ' ||
        stock_managers(i).first_name
      );
    END LOOP;END;
/
```

Result:

```
01-MAY-13 Kaufling, Payam
18-JUL-14 Weiss, Matthew
10-APR-15 Fripp, Adam
10-OCT-15 Vollman, Shanta
16-NOV-17 Mourgos, Kevin
```

Row Limits for FETCH BULK COLLECT Statements

A `FETCH BULK COLLECT` statement that returns a large number of rows produces a large collection. To limit the number of rows and the collection size, use the `LIMIT` clause.

In Example 13-24, with each iteration of the `LOOP` statement, the `FETCH` statement fetches ten rows (or fewer) into associative array `empids` (overwriting the previous values). Note the exit condition for the `LOOP` statement.

Example 13-24 Limiting Bulk FETCH with LIMIT

```
DECLARE
  TYPE numtab IS TABLE OF NUMBER INDEX BY PLS_INTEGER;

  CURSOR c1 IS
    SELECT employee_id
    FROM employees
    WHERE department_id = 80
    ORDER BY employee_id;

  empids  numtab;
BEGIN
  OPEN c1;
  LOOP  -- Fetch 10 rows or fewer in each iteration
    FETCH c1 BULK COLLECT INTO empids LIMIT 10;
    DBMS_OUTPUT.PUT_LINE ('------- Results from One Bulk Fetch --------');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    FOR i IN 1..empids.COUNT LOOP
      DBMS_OUTPUT.PUT_LINE ('Employee Id: ' || empids(i));
    END LOOP;
    EXIT WHEN c1%NOTFOUND;
  END LOOP;
  CLOSE c1;
END;
/
```

Result:

```
------- Results from One Bulk Fetch --------
Employee Id: 145
Employee Id: 146
Employee Id: 147
Employee Id: 148
Employee Id: 149
Employee Id: 150
Employee Id: 151
Employee Id: 152
Employee Id: 153
Employee Id: 154
------- Results from One Bulk Fetch --------
Employee Id: 155
Employee Id: 156
Employee Id: 157
Employee Id: 158
Employee Id: 159
Employee Id: 160
Employee Id: 161
Employee Id: 162
Employee Id: 163
Employee Id: 164
------- Results from One Bulk Fetch --------
Employee Id: 165
Employee Id: 166
Employee Id: 167
Employee Id: 168
Employee Id: 169
Employee Id: 170
Employee Id: 171
Employee Id: 172
Employee Id: 173
Employee Id: 174
------- Results from One Bulk Fetch --------
Employee Id: 175
Employee Id: 176
Employee Id: 177
Employee Id: 179
```

RETURNING INTO Clause with BULK COLLECT Clause

The `RETURNING INTO` clause with the `BULK COLLECT` clause (also called the `RETURNING BULK COLLECT INTO` clause) can appear in an `INSERT`, `UPDATE`, `MERGE`, `DELETE`, or `EXECUTE IMMEDIATE` statement. With the `RETURNING BULK COLLECT INTO` clause, the statement stores its result set in one or more collections.

For more information, see "RETURNING INTO Clause".

Example 13-25 uses a `DELETE` statement with the `RETURNING BULK COLLECT INTO` clause to delete rows from a table and return them in two collections (nested tables).

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-26 uses the keywords OLD and NEW to return the values of employee salaries before and after an UPDATE statement with the RETURNING BULK COLLECT INTO clause.

Example 13-25 Returning Deleted Rows in Two Nested Tables

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp AS
SELECT * FROM employees
ORDER BY employee_id;

DECLARE
  TYPE NumList IS TABLE OF employees.employee_id%TYPE;
  enums  NumList;
  TYPE NameList IS TABLE OF employees.last_name%TYPE;
  names  NameList;
BEGIN
  DELETE FROM emp_temp
  WHERE department_id = 30
  RETURNING employee_id, last_name
  BULK COLLECT INTO enums, names;

  DBMS_OUTPUT.PUT_LINE ('Deleted ' || SQL%ROWCOUNT || ' rows:');
  FOR i IN enums.FIRST .. enums.LAST
  LOOP
    DBMS_OUTPUT.PUT_LINE ('Employee #' || enums(i) || ': ' || names(i));
  END LOOP;
END;
/
```

Result:

```
Deleted 6 rows:
Employee #114: Li
Employee #115: Khoo
Employee #116: Baida
Employee #117: Tobias
Employee #118: Himuro
Employee #119: Colmenares
```

Example 13-26 Returning NEW and OLD Values of Updated Rows

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp AS
SELECT * FROM employees
ORDER BY employee_id;

DECLARE
  TYPE SalList IS TABLE OF employees.salary%TYPE;
  old_sals SalList;
  new_sals SalList;
  TYPE NameList IS TABLE OF employees.last_name%TYPE;
  names NameList;
BEGIN
  UPDATE emp_temp SET salary = salary * 1.15
  WHERE salary < 2500
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  RETURNING OLD salary, NEW salary, last_name
  BULK COLLECT INTO old_sals, new_sals, names;

  DBMS_OUTPUT.PUT_LINE('Updated ' || SQL%ROWCOUNT || ' rows: ');
  FOR i IN old_sals.FIRST .. old_sals.LAST
  LOOP
    DBMS_OUTPUT.PUT_LINE(names(i) || ': Old Salary $' || old_sals(i) ||
            ', New Salary $' || new_sals(i));
  END LOOP;
END;
/
```

Result:

```
Landry: Old Salary $2400, New Salary $2760
Markle: Old Salary $2200, New Salary $2530
Olson: Old Salary $2100, New Salary $2415
Gee: Old Salary $2400, New Salary $2760
Philtanker: Old Salary $2200, New Salary $2530
```

Using FORALL Statement and BULK COLLECT Clause Together

In a `FORALL` statement, the DML statement can have a `RETURNING BULK COLLECT INTO` clause. For each iteration of the `FORALL` statement, the DML statement stores the specified values in the specified collections—without overwriting the previous values, as the same DML statement would do in a `FOR LOOP` statement.

In Example 13-27, the `FORALL` statement runs a `DELETE` statement that has a `RETURNING BULK COLLECT INTO` clause. For each iteration of the `FORALL` statement, the `DELETE` statement stores the `employee_id` and `department_id` values of the deleted row in the collections `e_ids` and `d_ids`, respectively.

Example 13-28 is like Example 13-27 except that it uses a `FOR LOOP` statement instead of a `FORALL` statement.

Example 13-27 DELETE with RETURN BULK COLLECT INTO in FORALL Statement

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp AS
SELECT * FROM employees
ORDER BY employee_id, department_id;

DECLARE
  TYPE NumList IS TABLE OF NUMBER;
  depts  NumList := NumList(10,20,30);

  TYPE enum_t IS TABLE OF employees.employee_id%TYPE;
  e_ids  enum_t;

  TYPE dept_t IS TABLE OF employees.department_id%TYPE;
  d_ids  dept_t;

BEGIN
  FORALL j IN depts.FIRST..depts.LAST
    DELETE FROM emp_temp
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    WHERE department_id = depts(j)
    RETURNING employee_id, department_id
    BULK COLLECT INTO e_ids, d_ids;

  DBMS_OUTPUT.PUT_LINE ('Deleted ' || SQL%ROWCOUNT || ' rows:');

  FOR i IN e_ids.FIRST .. e_ids.LAST
  LOOP
    DBMS_OUTPUT.PUT_LINE (
      'Employee #' || e_ids(i) || ' from dept #' || d_ids(i)
    );
  END LOOP;
END;
/
```

Result:

```
Deleted 9 rows:
Employee #200 from dept #10
Employee #201 from dept #20
Employee #202 from dept #20
Employee #114 from dept #30
Employee #115 from dept #30
Employee #116 from dept #30
Employee #117 from dept #30
Employee #118 from dept #30
Employee #119 from dept #30
```

Example 13-28 DELETE with RETURN BULK COLLECT INTO in FOR LOOP Statement

```
DROP TABLE emp_temp;
CREATE TABLE emp_temp AS
SELECT * FROM employees
ORDER BY employee_id, department_id;

DECLARE
  TYPE NumList IS TABLE OF NUMBER;
  depts  NumList := NumList(10,20,30);

  TYPE enum_t IS TABLE OF employees.employee_id%TYPE;
  e_ids  enum_t;

  TYPE dept_t IS TABLE OF employees.department_id%TYPE;
  d_ids  dept_t;

BEGIN
  FOR j IN depts.FIRST..depts.LAST LOOP
    DELETE FROM emp_temp
    WHERE department_id = depts(j)
    RETURNING employee_id, department_id
    BULK COLLECT INTO e_ids, d_ids;
  END LOOP;

  DBMS_OUTPUT.PUT_LINE ('Deleted ' || SQL%ROWCOUNT || ' rows:');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  FOR i IN e_ids.FIRST .. e_ids.LAST
  LOOP
    DBMS_OUTPUT.PUT_LINE (
      'Employee #' || e_ids(i) || ' from dept #' || d_ids(i)
    );
  END LOOP;
END;
/
```

Result:

```
Deleted 6 rows:
Employee #114 from dept #30
Employee #115 from dept #30
Employee #116 from dept #30
Employee #117 from dept #30
Employee #118 from dept #30
Employee #119 from dept #30
```

Client Bulk-Binding of Host Arrays

Client programs (such as OCI and Pro*C programs) can use PL/SQL anonymous blocks to bulk-bind input and output host arrays. This is the most efficient way to pass collections to and from the database server.

In the client program, declare and assign values to the host variables to be referenced in the anonymous block. In the anonymous block, prefix each host variable name with a colon (:) to distinguish it from a PL/SQL collection variable name. When the client program runs, the database server runs the PL/SQL anonymous block.

In Example 13-29, the anonymous block uses a `FORALL` statement to bulk-bind a host input array. In the `FORALL` statement, the `DELETE` statement refers to four host variables: scalars `lower`, `upper`, and `emp_id` and array `depts`.

Example 13-29 Anonymous Block Bulk-Binds Input Host Array

```
BEGIN
  FORALL i IN :lower..:upper
    DELETE FROM employees
    WHERE department_id = :depts(i);
END;
/
```

Chaining Pipelined Table Functions for Multiple Transformations

Chaining pipelined table functions is an efficient way to perform multiple transformations on data.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> You cannot run a pipelined table function over a database link. The reason is that the return type of a pipelined table function is a SQL user-defined type, which can be used only in a single database (as explained in *Oracle Database Object-Relational Developer's Guide*). Although the return type of a pipelined table function might appear to be a PL/SQL type, the database actually converts that PL/SQL type to a corresponding SQL user-defined type.

Topics

- Overview of Table Functions
- Creating Pipelined Table Functions
- Pipelined Table Functions as Transformation Functions
- Chaining Pipelined Table Functions
- Fetching from Results of Pipelined Table Functions
- Passing CURSOR Expressions to Pipelined Table Functions
- DML Statements on Pipelined Table Function Results
- NO_DATA_NEEDED Exception

Overview of Table Functions

A **table function** is a user-defined PL/SQL function that returns a collection of rows (an associative array, nested table or varray).

You can select from this collection as if it were a database table by invoking the table function inside the `TABLE` clause in a `SELECT` statement. The TABLE operator is optional.

For example:

```
SELECT * FROM TABLE(table_function_name(parameter_list))
```

Alternatively, the same query can be written without the TABLE operator as follow:

```
SELECT * FROM table_function_name(parameter_list)
```

A table function can take a collection of rows as input (that is, it can have an input parameter that is a nested table, varray, or cursor variable). Therefore, output from table function `tf1` can be input to table function `tf2`, and output from `tf2` can be input to table function `tf3`, and so on.

To improve the performance of a table function, you can:

- Enable the function for parallel execution, with the `PARALLEL_ENABLE` option.

  Functions enabled for parallel execution can run concurrently.
- Stream the function results directly to the next process, with Oracle Streams.

  Streaming eliminates intermediate staging between processes.
- Pipeline the function results, with the `PIPELINED` option.

  A **pipelined table function** returns a row to its invoker immediately after processing that row and continues to process rows. Response time improves because the entire collection

Copyright © 1996, 2025, Oracle and/or its affiliates.

need not be constructed and returned to the server before the query can return a single result row. (Also, the function needs less memory, because the object cache need not materialize the entire collection.)

> **⚠ Caution**
>
> A pipelined table function always references the current state of the data. If the data in the collection changes after the cursor opens for the collection, then the cursor reflects the changes. PL/SQL variables are private to a session and are not transactional. Therefore, read consistency, well known for its applicability to table data, does not apply to PL/SQL collection variables.

> **ⓘ See Also**
>
> - Chaining Pipelined Table Functions
> - *Oracle Database SQL Language Reference* for more information about the `TABLE` clause of the `SELECT` statement
> - *Oracle Database Data Cartridge Developer's Guide* for information about using pipelined and parallel table functions

Creating Pipelined Table Functions

A pipelined table function must be either a standalone function or a package function.

PIPELINED Option (Required)

For a standalone function, specify the `PIPELINED` option in the `CREATE FUNCTION` statement (for syntax, see "CREATE FUNCTION Statement"). For a package function, specify the `PIPELINED` option in both the function declaration and function definition (for syntax, see "Function Declaration and Definition").

PARALLEL_ENABLE Option (Recommended)

To improve its performance, enable the pipelined table function for parallel execution by specifying the `PARALLEL_ENABLE` option.

AUTONOMOUS_TRANSACTION Pragma

If the pipelined table function runs DML statements, then make it autonomous, with the `AUTONOMOUS_TRANSACTION` pragma (described in "AUTONOMOUS_TRANSACTION Pragma"). Then, during parallel execution, each instance of the function creates an independent transaction.

DETERMINISTIC Option (Recommended)

Multiple invocations of a pipelined table function, in either the same query or separate queries, cause multiple executions of the underlying implementation. If the function is deterministic, specify the `DETERMINISTIC` option, described in "DETERMINISTIC Clause".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Parameters

Typically, a pipelined table function has one or more cursor variable parameters. For information about cursor variables as function parameters, see "Cursor Variables as Subprogram Parameters".

> **See Also**
>
> - "Cursor Variables" for general information about cursor variables
> - "Subprogram Parameters" for general information about subprogram parameters

RETURN Data Type

The data type of the value that a pipelined table function returns must be a collection type defined either at schema level or inside a package (therefore, it cannot be an associative array type). The elements of the collection type must be SQL data types, not data types supported only by PL/SQL (such as `PLS_INTEGER`). For information about collection types, see "Collection Types". For information about SQL data types, see *Oracle Database SQL Language Reference*.

You can use SQL data types `ANYTYPE`, `ANYDATA`, and `ANYDATASET` to dynamically encapsulate and access type descriptions, data instances, and sets of data instances of any other SQL type, including object and collection types. You can also use these types to create unnamed types, including anonymous collection types. For information about these types, see *Oracle Database PL/SQL Packages and Types Reference*.

PIPE ROW Statement

Inside a pipelined table function, use the `PIPE ROW` statement to return a collection element to the invoker without returning control to the invoker. See "PIPE ROW Statement" for its syntax and semantics.

RETURN Statement

As in every function, every execution path in a pipelined table function must lead to a `RETURN` statement, which returns control to the invoker. However, in a pipelined table function, a `RETURN` statement need not return a value to the invoker. See "RETURN Statement" for its syntax and semantics.

Example

Example 13-30 Creating and Invoking Pipelined Table Function

This example creates a package that includes a pipelined table function, `f1`, and then selects from the collection of rows that `f1` returns.

```
CREATE OR REPLACE PACKAGE pkg1 AUTHID DEFINER AS
  TYPE numset_t IS TABLE OF NUMBER;
  FUNCTION f1(x NUMBER) RETURN numset_t PIPELINED;
END pkg1;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Create a pipelined table function f1 that returns a collection of elements (1,2,3,... x).

```
CREATE OR REPLACE PACKAGE BODY pkg1 AS
  FUNCTION f1(x NUMBER) RETURN numset_t PIPELINED IS
  BEGIN
    FOR i IN 1..x LOOP
      PIPE ROW(i);
    END LOOP;
    RETURN;
  END f1;
END pkg1;
/


SELECT * FROM TABLE(pkg1.f1(5));
```

Result:

```
COLUMN_VALUE
------------
           1
           2
           3
           4
           5

5 rows selected.


SELECT * FROM pkg1.f1(2);
```

Result:

```
COLUMN_VALUE
------------
           1
           2
```

Pipelined Table Functions as Transformation Functions

A pipelined table function with a cursor variable parameter can serve as a transformation function. Using the cursor variable, the function fetches an input row. Using the `PIPE ROW` statement, the function pipes the transformed row or rows to the invoker. If the `FETCH` and `PIPE ROW` statements are inside a `LOOP` statement, the function can transform multiple input rows.

In Example 13-31, the pipelined table function transforms each selected row of the `employees` table to two nested table rows, which it pipes to the `SELECT` statement that invokes it. The actual parameter that corresponds to the formal cursor variable parameter is a `CURSOR` expression; for information about these, see "Passing CURSOR Expressions to Pipelined Table Functions".

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-31 Pipelined Table Function Transforms Each Row to Two Rows

```
CREATE OR REPLACE PACKAGE refcur_pkg AUTHID DEFINER IS
  TYPE refcur_t IS REF CURSOR RETURN employees%ROWTYPE;
  TYPE outrec_typ IS RECORD (
    var_num    NUMBER(6),
    var_char1  VARCHAR2(30),
    var_char2  VARCHAR2(30)
  );
  TYPE outrecset IS TABLE OF outrec_typ;
  FUNCTION f_trans (p refcur_t) RETURN outrecset PIPELINED;
END refcur_pkg;
/

CREATE OR REPLACE PACKAGE BODY refcur_pkg IS
  FUNCTION f_trans (p refcur_t) RETURN outrecset PIPELINED IS
    out_rec outrec_typ;
    in_rec  p%ROWTYPE;
  BEGIN
    LOOP
      FETCH p INTO in_rec;  -- input row
      EXIT WHEN p%NOTFOUND;

      out_rec.var_num := in_rec.employee_id;
      out_rec.var_char1 := in_rec.first_name;
      out_rec.var_char2 := in_rec.last_name;
      PIPE ROW(out_rec);  -- first transformed output row

      out_rec.var_char1 := in_rec.email;
      out_rec.var_char2 := in_rec.phone_number;
      PIPE ROW(out_rec);  -- second transformed output row
    END LOOP;
    CLOSE p;
    RETURN;
  END f_trans;
END refcur_pkg;
/

SELECT * FROM TABLE (
  refcur_pkg.f_trans (
    CURSOR (SELECT * FROM employees WHERE department_id = 60)
  )
);
```

Result:

```
   VAR_NUM VAR_CHAR1                      VAR_CHAR2
---------- ------------------------------ ------------------------------
       103 Alexander                      James
       103 AJAMES                         1.590.555.0103
       104 Bruce                          Miller
       104 BMILLER                        1.590.555.0104
       105 David                          Williams
       105 DWILLIAMS                      1.590.555.0105
       106 Valli                          Jackson
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
       106 VJACKSON                  1.590.555.0106
       107 Diana                     Nguyen
       107 DNGUYEN                   1.590.555.0107

10 rows selected.
```

Chaining Pipelined Table Functions

To **chain** pipelined table functions `tf1` and `tf2` is to make the output of `tf1` the input of `tf2`. For example:

```
SELECT * FROM TABLE(tf2(CURSOR(SELECT * FROM TABLE(tf1()))));
```

The rows that `tf1` pipes out must be compatible actual parameters for the formal input parameters of `tf2`.

If chained pipelined table functions are enabled for parallel execution, then each function runs in a different process (or set of processes).

> **See Also**
>
> "Passing CURSOR Expressions to Pipelined Table Functions"

Fetching from Results of Pipelined Table Functions

You can associate a named cursor with a query that invokes a pipelined table function. Such a cursor has no special fetch semantics, and such a cursor variable has no special assignment semantics.

However, the SQL optimizer does not optimize across PL/SQL statements. Therefore, in Example 13-32, the first PL/SQL statement is slower than the second—despite the overhead of running two SQL statements in the second PL/SQL statement, and even if function results are piped between the two SQL statements in the first PL/SQL statement.

In Example 13-32, assume that `f` and `g` are pipelined table functions, and that each function accepts a cursor variable parameter. The first PL/SQL statement associates cursor variable `r` with a query that invokes `f`, and then passes `r` to `g`. The second PL/SQL statement passes `CURSOR` expressions to both `f` and `g`.

> **See Also**
>
> "Cursor Variables as Subprogram Parameters"

Example 13-32 Fetching from Results of Pipelined Table Functions

```
DECLARE
  r SYS_REFCURSOR;
  ...
  -- First PL/SQL statement (slower):
BEGIN
  OPEN r FOR SELECT * FROM TABLE(f(CURSOR(SELECT * FROM tab)));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  SELECT * BULK COLLECT INTO rec_tab FROM TABLE(g(r));

  -- NOTE: When g completes, it closes r.
END;

-- Second PL/SQL statement (faster):

SELECT * FROM TABLE(g(CURSOR(SELECT * FROM
  TABLE(f(CURSOR(SELECT * FROM tab))))));
/
```

Passing CURSOR Expressions to Pipelined Table Functions

As Example 13-32 shows, the actual parameter for the cursor variable parameter of a pipelined table function can be either a cursor variable or a `CURSOR` expression, and the latter is more efficient.

> **Note**
>
> When a SQL `SELECT` statement passes a `CURSOR` expression to a function, the referenced cursor opens when the function begins to run and closes when the function completes.

> **See Also**
>
> "CURSOR Expressions" for general information about `CURSOR` expressions

Example 13-33 creates a package that includes a pipelined table function with two cursor variable parameters and then invokes the function in a `SELECT` statement, using `CURSOR` expressions for actual parameters.

Example 13-34 uses a pipelined table function as an aggregate function, which takes a set of input rows and returns a single result. The `SELECT` statement selects the function result. (For information about the pseudocolumn `COLUMN_VALUE`, see *Oracle Database SQL Language Reference*.)

Example 13-33 Pipelined Table Function with Two Cursor Variable Parameters

```
CREATE OR REPLACE PACKAGE refcur_pkg AUTHID DEFINER IS
  TYPE refcur_t1 IS REF CURSOR RETURN employees%ROWTYPE;
  TYPE refcur_t2 IS REF CURSOR RETURN departments%ROWTYPE;
  TYPE outrec_typ IS RECORD (
    var_num    NUMBER(6),
    var_char1  VARCHAR2(30),
    var_char2  VARCHAR2(30)
  );
  TYPE outrecset IS TABLE OF outrec_typ;
  FUNCTION g_trans (p1 refcur_t1, p2 refcur_t2) RETURN outrecset PIPELINED;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END refcur_pkg;
/



CREATE OR REPLACE PACKAGE BODY refcur_pkg IS
  FUNCTION g_trans (
    p1 refcur_t1,
    p2 refcur_t2
  ) RETURN outrecset PIPELINED
  IS
    out_rec outrec_typ;
    in_rec1 p1%ROWTYPE;
    in_rec2 p2%ROWTYPE;
  BEGIN
    LOOP
      FETCH p2 INTO in_rec2;
      EXIT WHEN p2%NOTFOUND;
    END LOOP;
    CLOSE p2;
    LOOP
      FETCH p1 INTO in_rec1;
      EXIT WHEN p1%NOTFOUND;
      -- first row
      out_rec.var_num := in_rec1.employee_id;
      out_rec.var_char1 := in_rec1.first_name;
      out_rec.var_char2 := in_rec1.last_name;
      PIPE ROW(out_rec);
      -- second row
      out_rec.var_num := in_rec2.department_id;
      out_rec.var_char1 := in_rec2.department_name;
      out_rec.var_char2 := TO_CHAR(in_rec2.location_id);
      PIPE ROW(out_rec);
    END LOOP;
    CLOSE p1;
    RETURN;
  END g_trans;
END refcur_pkg;
/



SELECT * FROM TABLE (
  refcur_pkg.g_trans (
    CURSOR (SELECT * FROM employees WHERE department_id = 60),
    CURSOR (SELECT * FROM departments WHERE department_id = 60)
  )
);
```

Result:

```
   VAR_NUM VAR_CHAR1                      VAR_CHAR2
---------- ------------------------------ ------------------------------
       103 Alexander                      James
        60 IT                             1400
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
       104 Bruce                          Miller
        60 IT                             1400
       105 David                          Williams
        60 IT                             1400
       106 Valli                          Jackson
        60 IT                             1400
       107 Diana                          Nguyen
        60 IT                             1400

10 rows selected.
```

Example 13-34 Pipelined Table Function as Aggregate Function

```
DROP TABLE gradereport;
CREATE TABLE gradereport (
  student VARCHAR2(30),
  subject VARCHAR2(30),
  weight NUMBER,
  grade NUMBER
);

INSERT INTO gradereport (student, subject, weight, grade)
VALUES ('Mark', 'Physics', 4, 4);

INSERT INTO gradereport (student, subject, weight, grade)
VALUES ('Mark','Chemistry', 4, 3);

INSERT INTO gradereport (student, subject, weight, grade)
VALUES ('Mark','Maths', 3, 3);

INSERT INTO gradereport (student, subject, weight, grade)
VALUES ('Mark','Economics', 3, 4);



CREATE OR REPLACE PACKAGE pkg_gpa AUTHID DEFINER IS
  TYPE gpa IS TABLE OF NUMBER;
  FUNCTION weighted_average(input_values SYS_REFCURSOR)
    RETURN gpa PIPELINED;
END pkg_gpa;
/

CREATE OR REPLACE PACKAGE BODY pkg_gpa IS
  FUNCTION weighted_average (input_values SYS_REFCURSOR)
    RETURN gpa PIPELINED
  IS
    grade         NUMBER;
    total         NUMBER := 0;
    total_weight  NUMBER := 0;
    weight        NUMBER := 0;
  BEGIN
    LOOP
      FETCH input_values INTO weight, grade;
      EXIT WHEN input_values%NOTFOUND;
      total_weight := total_weight + weight;  -- Accumulate weighted average
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      total := total + grade*weight;
    END LOOP;
    PIPE ROW (total / total_weight);
    RETURN; -- returns single result
  END weighted_average;
END pkg_gpa;
/
```

This query shows how the table function can be invoked without the optional TABLE operator.

```
SELECT w.column_value "weighted result"
FROM pkg_gpa.weighted_average (
    CURSOR (SELECT weight, grade FROM gradereport)
  ) w;
```

Result:

```
weighted result
---------------
            3.5

1 row selected.
```

DML Statements on Pipelined Table Function Results

The "table" that a pipelined table function returns cannot be the target table of a `DELETE`, `INSERT`, `UPDATE`, or `MERGE` statement. However, you can create a view of such a table and create `INSTEAD OF` triggers on the view. For information about `INSTEAD OF` triggers, see "INSTEAD OF DML Triggers".

> **See Also**
>
> *Oracle Database SQL Language Reference* for information about the `CREATE VIEW` statement

NO_DATA_NEEDED Exception

You must understand the predefined exception `NO_DATA_NEEDED` in two cases:

- You include an `OTHERS` exception handler in a block that includes a `PIPE ROW` statement
- Your code that feeds a `PIPE ROW` statement must be followed by a clean-up procedure

  Typically, the clean-up procedure releases resources that the code no longer needs.

When the invoker of a pipelined table function needs no more rows from the function, the `PIPE ROW` statement raises `NO_DATA_NEEDED`. If the pipelined table function does not handle `NO_DATA_NEEDED`, as in Example 13-35, then the function invocation terminates but the invoking statement does not terminate. If the pipelined table function handles `NO_DATA_NEEDED`, its exception handler can release the resources that it no longer needs, as in Example 13-36.

In Example 13-35, the pipelined table function `pipe_rows` does not handle the `NO_DATA_NEEDED` exception. The `SELECT` statement that invokes `pipe_rows` needs only four rows. Therefore,

Copyright © 1996, 2025, Oracle and/or its affiliates.

during the fifth invocation of `pipe_rows`, the `PIPE ROW` statement raises the exception `NO_DATA_NEEDED`. The fifth invocation of `pipe_rows` terminates, but the `SELECT` statement does not terminate.

If the exception-handling part of a block that includes a `PIPE ROW` statement includes an `OTHERS` exception handler to handle unexpected exceptions, then it must also include an exception handler for the expected `NO_DATA_NEEDED` exception. Otherwise, the `OTHERS` exception handler handles the `NO_DATA_NEEDED` exception, treating it as an unexpected error. The following exception handler reraises the `NO_DATA_NEEDED` exception, instead of treating it as a irrecoverable error:

```
EXCEPTION
  WHEN NO_DATA_NEEDED THEN
    RAISE;
  WHEN OTHERS THEN
    -- (Put error-logging code here)
    RAISE_APPLICATION_ERROR(-20000, 'Irrecoverable error.');
END;
```

In Example 13-36, assume that the package `External_Source` contains these public items:

- Procedure `Init`, which allocates and initializes the resources that `Next_Row` needs
- Function `Next_Row`, which returns some data from a specific external source and raises the user-defined exception `Done` (which is also a public item in the package) when the external source has no more data
- Procedure `Clean_Up`, which releases the resources that `Init` allocated

The pipelined table function `get_external_source_data` pipes rows from the external source by invoking `External_Source.Next_Row` until either:

- The external source has no more rows.

  In this case, the `External_Source.Next_Row` function raises the user-defined exception `External_Source.Done`.

- `get_external_source_data` needs no more rows.

  In this case, the `PIPE ROW` statement in `get_external_source_data` raises the `NO_DATA_NEEDED` exception.

In either case, an exception handler in block `b` in `get_external_source_data` invokes `External_Source.Clean_Up`, which releases the resources that `Next_Row` was using.

Example 13-35 Pipelined Table Function Does Not Handle NO_DATA_NEEDED

```
CREATE TYPE t IS TABLE OF NUMBER
/
CREATE OR REPLACE FUNCTION pipe_rows RETURN t PIPELINED AUTHID DEFINER IS
  n NUMBER := 0;
BEGIN
  LOOP
    n := n + 1;
    PIPE ROW (n);
  END LOOP;
END pipe_rows;
/
SELECT COLUMN_VALUE
  FROM TABLE(pipe_rows())
  WHERE ROWNUM < 5
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
COLUMN_VALUE
------------
           1
           2
           3
           4

4 rows selected.
```

Example 13-36 Pipelined Table Function Handles NO_DATA_NEEDED

```
CREATE OR REPLACE FUNCTION get_external_source_data
  RETURN t PIPELINED AUTHID DEFINER IS
BEGIN
  External_Source.Init();           -- Initialize.
  <<b>> BEGIN
    LOOP                            -- Pipe rows from external source.
      PIPE ROW (External_Source.Next_Row());
    END LOOP;
  EXCEPTION
    WHEN External_Source.Done THEN  -- When no more rows are available,
      External_Source.Clean_Up();   --  clean up.
    WHEN NO_DATA_NEEDED THEN        -- When no more rows are needed,
      External_Source.Clean_Up();   --  clean up.
      RAISE NO_DATA_NEEDED;           -- Optional, equivalent to RETURN.
  END b;
END get_external_source_data;
/
```

Overview of Polymorphic Table Functions

Polymorphic table functions (PTF) are table functions whose operands can have more than one type. The return type is determined by the PTF invocation arguments list. The actual arguments to the table type usually determines the row output shape, but not always.

Introduction to Polymorphic Table Functions

Polymorphic Table Functions (PTF) are user-defined functions that can be invoked in the `FROM` clause of a SQL query block. They are capable of processing tables whose row type is not declared at definition time and producing a result table whose row type may or may not be declared at definition time. Polymorphic table functions leverage dynamic SQL capabilities to create powerful and complex custom functions. This is useful for applications demanding an interface with generic extensions which work for arbitrary input tables or queries.

A PTF author creates an interface to a procedural mechanism that defines a table. The PTF author defines, documents, and implements the PTF.

The query author can only describe the published interface and invoke the PTF function in queries.

The database is the PTF conductor. It manages the compilation and execution states of the PTF. The database and the PTF author can see a family of related SQL invoked procedures, called the PTF component procedures, and possibly additional private data (such as variables and cursors).

Copyright © 1996, 2025, Oracle and/or its affiliates.

Types of Polymorphic Table Functions

The polymorphic table function type is specified based on their formal arguments list semantics:

- If an input `TABLE` argument has `Row Semantics`, the input is a single row.
- If an input `TABLE` argument has `Table Semantics`, the input is a set of rows. When a `Table Semantics` PTF is called from a query, the table argument can optionally be extended with either a `PARTITION BY` clause or an `ORDER BY` clause or both.

Polymorphic Table Function Definition

The PTF author defines, documents, and implements the Polymorphic Table Function (PTF).

A PTF has two parts:

1. The PL/SQL package which contains the client interface for the PTF implementation.

2. The standalone or package function naming the PTF and its associated implementation package.

Polymorphic Table Function Implementation

The Polymorphic Table Function (PTF) implementation client interface is a set of subprograms with fixed names that every PTF must provide.

Steps to Implement a Polymorphic Table Function

1. Create the implementation package containing the `DESCRIBE` function (required) and the `OPEN`, `FETCH_ROWS` , and `CLOSE` procedures (optional).
2. Create the function specification naming the PTF. The function can be created at the top-level after the package has been created, or as a package function in the implementation package (the package created in the first step). Polymorphic table functions do not have a function definition (a `FUNCTION BODY`), the definition is encapsulated in the associated implementation package.

   The function definition specifies :

   - The Polymorphic Table Function (PTF) name
   - Exactly one formal argument of type `TABLE` and any number of non `TABLE` arguments
   - The return type of the PTF as `TABLE`
   - The type of PTF function (`row` or `table semantics`)
   - The PTF implementation package name

Copyright © 1996, 2025, Oracle and/or its affiliates.

See Also

- *Oracle Database PL/SQL Packages and Types Reference* for information about a `DESCRIBE` Only polymorphic table function
- *Oracle Database PL/SQL Packages and Types Reference* for more information about how to specify the PTF implementation package and use the `DBMS_TF` utilities
- PIPELINED Clause for the standalone or package polymorphic table function creation syntax and semantic

Polymorphic Table Function Invocation

A polymorphic table function is invoked by specifying its name followed by the argument list in the `FROM` clause of a SQL query block.

The PTF arguments can be the standard scalar arguments that can be passed to a regular table function, but PTF's can additionally take a table argument. A table argument is either a `WITH` clause query or a schema-level object that is allowed in a `FROM` clause (such as tables, views, or table functions).

Syntax

table_argument ::= *table* [PARTITION BY *column_list*] [ORDER BY *order_column_list*]

column_list ::= *identifier* | (*identifier*[, *identifier*…])

order_column_list ::= *order_column_name* | (*order_column_name* [, *order_column_name*…])

order_column_name ::= *identifier* [ASC | DESC][NULLS FIRST | NULLS LAST]

Semantics

Each identifier is a column in the corresponding table.

The PTF has `Table Semantics`.

Query can optionally partition and order `Table Semantics` PTF input. This is disallowed for `Row Semantics` PTF input.

A polymorphic table function (PTF) cannot be the target of a DML statement. Any table argument of a PTF is passed in by name.

For example, the noop PTF can be used in a query such as :

```
SELECT *
FROM noop(emp);
```

or

```
WITH e AS
 (SELECT * FROM emp NATURAL JOIN dept)
SELECT t.* FROM noop(e) t;
```

The input table argument must be a basic table name.

The name resolution rules of the table identifier are (in priority order) as follows :

Copyright © 1996, 2025, Oracle and/or its affiliates.

1. Identifier is resolved as a column name (such as a correlated column from an outer query block).
2. Identifier is resolved as a Common Table Expression (CTE) name in the current or some outer query-block. CTE is commonly known as the `WITH` clause.
3. Identifier is resolved as a schema-level table, view, or table-function (regular or polymorphic, and defined either at the schema-level or inside a package).

Many types of table expressions otherwise allowed in the `FROM` clause cannot be directly used as a table argument for a PTF (such as ANSI Joins, bind-variables, in-line views, `CURSOR` operators, `TABLE` operators). To use such table expressions as a PTF argument, these table expressions must be passed indirectly into a PTF by wrapping them in a CTE and then passing the CTE name into the PTF.

A PTF can be used as a table reference in the `FROM` clause and thus can be part of the ANSI Join and LATERAL syntax. Additionally, a PTF can be the source table for PIVOT/UNPIVOT and MATCH_RECOGNIZE. Some table modification clauses that are meant for tables and views (such as SAMPLING, PARTITION, CONTAINERS) are disallowed for PTF.

Direct function composition of PTF is allowed (such as nested PTF cursor expression invocation or PTF(TF()) nesting). However, nested PTF is disallowed (such as PTF(PTF()) nesting).

The scalar arguments of a PTF can be any SQL scalar expression. While the constant scalar values are passed as-is to the `DESCRIBE` function, all other values are passed as NULLs. This is usually not a problem for the PTF implementation if these values are not row shape determining, but otherwise the `DESCRIBE` function can raise an error; typically the documentation accompanying the PTF will state which scalar parameters, if any, are shape defining and thus must have constant non-null values. Note, that during query execution (during `OPEN`, `FETCH_ROWS`, `CLOSE`) the expressions are evaluated and their actual values are passed to these PTF execution procedures. The return type is determined by the PTF invocation arguments list.

Query arguments are passed to PTF using a `WITH` clause.

The `TABLE` operator is optional when the table function arguments list or empty list () appears.

Variadic Pseudo-Operators

A variadic pseudo-operator operates with a variable number of operands.

Starting with Oracle Database Release 18c, we introduce the concept of variadic pseudo-operator into the SQL expression language to support Polymorphic Table Functions (PTF). A pseudo-operator can be used to pass list of identifiers (such as column name) to a PTF. A pseudo-operator can only appear as arguments to PTFs, and are parsed by the SQL compiler like other SQL operators or PL/SQL function invocation. A pseudo-operator has a variable number of arguments but must have at least one. The pseudo-operator does not have any execution function associated with it, and they are completely removed from the SQL cursor after the PTF compilation is finished. During SQL compilation, the pseudo-operators are converted to corresponding DBMS_TF types and then passed to the `DESCRIBE` method. There is no output type associated with these operators. It is not possible to embed a pseudo-operator inside a general SQL expression.

Copyright © 1996, 2025, Oracle and/or its affiliates.

COLUMNS Pseudo-Operator

You can use the COLUMNS pseudo-operator to specify arguments to a Polymorphic Table Function (PTF) invocation in the `FROM` clause of a SQL query block.

The `COLUMNS` pseudo-operator arguments specify the list of column names, or the list of column names with associated types.

Syntax

column_operator ::= COLUMNS (*column_list*)

column_list ::= *column_name_list* | *column_type_list*

column_name_list ::= *identifier* [, *identifier* ...]

column_type_list::= *identifier column_type* [, *identifier column_type*…]

Semantics

The `COLUMNS` pseudo-operator can only appear as an argument to a PTF. It cannot appear in any other SQL expression than the PTF expression itself.

The *column_type* must be a scalar type.

Polymorphic Table Function Compilation and Execution

The database fulfills the Polymorphic Table Functions (PTF) conductor role. As such, it is responsible for the PTF compilation, execution and its related states.

The database manages :

- The compilation state : This is the immutable state that is generated by `DESCRIBE` which is needed before execution.
- The execution state: This is the state used by the execution procedures of a `Table semantics` PTF.

.

See Also

- *Oracle Database PL/SQL Packages and Types Reference* for more information about how the database manages the compilation and execution states of the PTFs

Polymorphic Table Function Optimization

A polymorphic table function (PTF) provides an efficient and scalable mechanism to extend the analytical capabilities of the database.

The key benefits are:

- Minimal data-movement: Only columns of interest are passed to PTF
- Predicates/Projections/Partitioning are/is pushed into underlying table/query (where semantically possible)

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Bulk data transfer into and out of PTF
- Parallelism is based on type of PTF and query specified partitioning (if any)

Skip_col Polymorphic Table Function Example

This PTF example demonstrates Row Semantics, Describe Only, package table function, and overloading features.

> **See Also**
>
> *Oracle Database PL/SQL Packages and Types Reference* for more Polymorphic Table Function (PTF) examples

Example 13-37 Skip_col Polymorphic Table Function Example

The skip_col Polymorphic Table Function (PTF) returns all the columns in a table except the columns specified in the PTF input argument. The skip_col PTF skips columns based on column names (overload 1) or columns data type (overload 2).

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at 18c Skip_col Polymorphic Table Function

Create the implementation package named skip_col_pkg containing the `DESCRIBE` function for the skip_col polymorphic table function (PTF). The `DESCRIBE` function is invoked to determine the row shape produced by the PTF. It returns a `DBMS_TF.DESCRIBE_T` table. It is overloaded. The `FETCH_ROWS` procedure is not required because it does need to produce associated new column values for a given subset of rows.

```
CREATE PACKAGE skip_col_pkg AS

  -- OVERLOAD 1: Skip by name --
  FUNCTION skip_col(tab TABLE,
                    col COLUMNS)
           RETURN TABLE PIPELINED ROW POLYMORPHIC USING skip_col_pkg;

  FUNCTION describe(tab IN OUT DBMS_TF.TABLE_T,
                    col        DBMS_TF.COLUMNS_T)
           RETURN DBMS_TF.DESCRIBE_T;

  -- OVERLOAD 2: Skip by type --
  FUNCTION skip_col(tab       TABLE,
                    type_name VARCHAR2,
                    flip      VARCHAR2 DEFAULT 'False')
           RETURN TABLE PIPELINED ROW POLYMORPHIC USING skip_col_pkg;

  FUNCTION describe(tab       IN OUT DBMS_TF.TABLE_T,
                    type_name        VARCHAR2,
                    flip             VARCHAR2 DEFAULT 'False')
           RETURN DBMS_TF.DESCRIBE_T;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END skip_col_pkg;
```

Create the implementation package body which contains the polymorphic table function definition.

```
CREATE PACKAGE BODY skip_col_pkg AS

/* OVERLOAD 1: Skip by name
 * Package PTF name:  skip_col_pkg.skip_col
 * Standalone PTF name: skip_col_by_name
 *
 * PARAMETERS:
 * tab - The input table
 * col - The name of the columns to drop from the output
 *
 * DESCRIPTION:
 *   This PTF removes all the input columns listed in col from the output
 *   of the PTF.
*/
 FUNCTION  describe(tab IN OUT DBMS_TF.TABLE_T,
                    col        DBMS_TF.COLUMNS_T)
            RETURN DBMS_TF.DESCRIBE_T
  AS
    new_cols DBMS_TF.COLUMNS_NEW_T;
    col_id   PLS_INTEGER := 1;
  BEGIN
    FOR i IN 1 .. tab.column.count() LOOP
      FOR j IN 1 .. col.count() LOOP
        tab.column(i).PASS_THROUGH := tab.column(i).DESCRIPTION.NAME !=
col(j);
        EXIT WHEN NOT tab.column(i).PASS_THROUGH;
      END LOOP;
    END LOOP;

    RETURN NULL;
  END;

/* OVERLOAD 2: Skip by type
 * Package PTF name:  skip_col_pkg.skip_col
 * Standalone PTF name: skip_col_by_type
 *
 * PARAMETERS:
 *   tab       - Input table
 *   type_name - A string representing the type of columns to skip
 *   flip      - 'False' [default] => Match columns with given type_name
 *               otherwise         => Ignore columns with given type_name
 *
 * DESCRIPTION:
 *   This PTF removes the given type of columns from the given table.
*/
  FUNCTION describe(tab       IN OUT DBMS_TF.TABLE_T,
                    type_name        VARCHAR2,
                    flip             VARCHAR2 DEFAULT 'False')
           RETURN DBMS_TF.DESCRIBE_T
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  AS
    typ CONSTANT VARCHAR2(1024) := UPPER(TRIM(type_name));
  BEGIN
    FOR i IN 1 .. tab.column.count() LOOP
       tab.column(i).PASS_THROUGH :=
         CASE UPPER(SUBSTR(flip,1,1))
           WHEN 'F' THEN DBMS_TF.column_type_name(tab.column(i).DESCRIPTION)!
=typ
           ELSE          DBMS_TF.column_type_name(tab.column(i).DESCRIPTION)
=typ
         END /* case */;
    END LOOP;

    RETURN NULL;
  END;

END skip_col_pkg;
```

Create a standalone polymorphic table function named skip_col_by_name for overload 1. Specify exactly one formal argument of type `TABLE`, specify the return type of the PTF as `TABLE`, specify a `Row Semantics` PTF type, and indicate the PTF implementation package to use is skip_col_pkg.

```
CREATE FUNCTION skip_col_by_name(tab TABLE,
                                 col COLUMNS)
                  RETURN TABLE PIPELINED ROW POLYMORPHIC USING skip_col_pkg;
```

Create a standalone polymorphic table function named skip_col_by_type for overload 2. Specify exactly one formal argument of type `TABLE`, specify the return type of the PTF as `TABLE`, specify a `Row Semantics` PTF type, and indicate the PTF implementation package to use is skip_col_pkg.

```
CREATE FUNCTION skip_col_by_type(tab TABLE,
                                 type_name VARCHAR2,
                                 flip VARCHAR2 DEFAULT 'False')
                  RETURN TABLE PIPELINED ROW POLYMORPHIC USING skip_col_pkg;
```

Invoke the package skip_col PTF (overload 1) to report from the `SCOTT.DEPT` table only columns whose type is not `NUMBER`.

```
SELECT * FROM skip_col_pkg.skip_col(scott.dept, 'number');

DNAME          LOC
-------------- -------------
ACCOUNTING     NEW YORK
RESEARCH       DALLAS
SALES          CHICAGO
OPERATIONS     BOSTON
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The same result can be achieved by invoking the standalone skip_col_by_type PTF to report from the SCOTT.DEPT table only columns whose type is not NUMBER.

```
SELECT * FROM skip_col_by_type(scott.dept, 'number');


DNAME          LOC
-------------- -------------
ACCOUNTING     NEW YORK
RESEARCH       DALLAS
SALES          CHICAGO
OPERATIONS     BOSTON
```

Invoke the package skip_col PTF (overload 2) to report from the SCOTT.DEPT table only columns whose type is NUMBER.

```
SELECT * FROM skip_col_pkg.skip_col(scott.dept, 'number', flip => 'True');


   DEPTNO
----------
        10
        20
        30
        40
```

The same result can be achieved by invoking the standalone skip_col_by_type PTF to report from the SCOTT.DEPT table only columns whose type is NUMBER.

```
SELECT * FROM skip_col_by_type(scott.dept, 'number', flip => 'True');


   DEPTNO
----------
        10
        20
        30
        40
```

Invoke the package skip_col PTF to report all employees in department 20 from the SCOTT.EMP table all columns except COMM, HIREDATE and MGR.

```
SELECT *
FROM skip_col_pkg.skip_col(scott.emp, COLUMNS(comm, hiredate, mgr))
WHERE deptno = 20;


    EMPNO ENAME      JOB              SAL     DEPTNO
---------- ---------- --------- ---------- ----------
      7369 SMITH      CLERK             800         20
      7566 JONES      MANAGER          2975         20
      7788 SCOTT      ANALYST          3000         20
      7876 ADAMS      CLERK            1100         20
      7902 FORD       ANALYST          3000         20
```

To_doc Polymorphic Table Function Example

The to_doc PTF example combines a list of specified columns into a single document column.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 13-38 To_doc Polymorphic Table Function Example

The to_doc PTF combines a list of columns into a document column constructed like a JSON object.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at 18c To_doc Polymorphic Table Function

Create the implementation package to_doc_p containing the `DESCRIBE` function and `FETCH_ROWS` procedure for the to_doc polymorphic table function (PTF).

The PTF parameters are :

- tab : The input table (The tab parameter is of type `DBMS_TF.TABLE_T`, a table descriptor record type)
- cols (optional) : The list of columns to convert to document. (The cols parameter is type `DBMS_TF.COLUMNS_T` , a column descriptor record type)

```
CREATE PACKAGE to_doc_p AS
   FUNCTION describe(tab      IN OUT DBMS_TF.TABLE_T,
                     cols     IN     DBMS_TF.COLUMNS_T DEFAULT NULL)
              RETURN DBMS_TF.DESCRIBE_T;

   PROCEDURE fetch_rows;
END to_doc_p;
```

Create the package containing the `DESCRIBE` function and `FETCH_ROWS` procedure. The `FETCH_ROWS` procedure is required to produce a new column named DOCUMENT in the output rowset. The `DESCRIBE` function indicates the read columns by annotating them in the input table descriptor, `TABLE_T`. Only the indicated read columns will be fetched and thus available for processing during `FETCH_ROWS`. The PTF invocation in a query can use the COLUMNS pseudo-operator to indicate which columns the query wants the PTF to read, and this information is passed to the `DESCRIBE` function which then in turn sets the `COLUMN_T.FOR_READ` boolean flag. Only scalar SQL data types are allowed for the read columns. The `COLUMN_T.PASS_THROUGH` boolean flag indicates columns that are passed from the input table of the PTF to the output, without any modifications.

```
CREATE PACKAGE BODY to_doc_p AS

FUNCTION describe(tab      IN OUT DBMS_TF.TABLE_T,
                  cols     IN     DBMS_TF.COLUMNS_T DEFAULT NULL)
            RETURN DBMS_TF.DESCRIBE_T AS
BEGIN
  FOR i IN 1 .. tab.column.count LOOP
     CONTINUE WHEN NOT DBMS_TF.SUPPORTED_TYPE(tab.column(i).DESCRIPTION.TYPE);

      IF cols IS NULL THEN
         tab.column(i).FOR_READ     := TRUE;
         tab.column(i).PASS_THROUGH := FALSE;
         CONTINUE;
       END IF;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      FOR j IN 1 .. cols.count LOOP
        IF (tab.column(i).DESCRIPTION.NAME = cols(j)) THEN
            tab.column(i).FOR_READ     := TRUE;
            tab.column(i).PASS_THROUGH := FALSE;
        END IF;
      END LOOP;

  END LOOP;

  RETURN DBMS_TF.describe_t(new_columns => DBMS_TF.COLUMNS_NEW_T(1 =>
                              DBMS_TF.COLUMN_METADATA_T(name
=>'DOCUMENT')));
END;

 PROCEDURE fetch_rows AS
      rst DBMS_TF.ROW_SET_T;
      col DBMS_TF.TAB_VARCHAR2_T;
      rct PLS_INTEGER;
 BEGIN
      DBMS_TF.GET_ROW_SET(rst, row_count => rct);
      FOR rid IN 1 .. rct LOOP
           col(rid) := DBMS_TF.ROW_TO_CHAR(rst, rid);
      END LOOP;
      DBMS_TF.PUT_COL(1, col);
 END;

END to_doc_p;
```

Create the standalone to_doc PTF. Specify exactly one formal argument of type `TABLE`, specify the return type of the PTF as `TABLE`, specify a Row Semantics PTF type, and indicate the PTF implementation package to use is to_doc_p.

```
CREATE FUNCTION to_doc(
                 tab  TABLE,
                       cols  COLUMNS DEFAULT NULL)
                       RETURN TABLE
    PIPELINED ROW POLYMORPHIC USING to_doc_p;
```

Invoke the to_doc PTF to display all columns of table `SCOTT.DEPT` as one combined `DOCUMENT` column.

```
SELECT * FROM to_doc(scott.dept);


DOCUMENT
-------------------------------------------------
{"DEPTNO":10, "DNAME":"ACCOUNTING", "LOC":"NEW YORK"}
{"DEPTNO":20, "DNAME":"RESEARCH", "LOC":"DALLAS"}
{"DEPTNO":30, "DNAME":"SALES", "LOC":"CHICAGO"}
{"DEPTNO":40, "DNAME":"OPERATIONS", "LOC":"BOSTON"}
```

For all employees in departments 10 and 30, display the `DEPTNO`, `ENAME` and `DOCUMENT` columns ordered by `DEPTNO` and `ENAME`. Invoke the to_doc PTF with the `COLUMNS` pseudo-operator to

Copyright © 1996, 2025, Oracle and/or its affiliates.

select columns EMPNO, JOB, MGR, HIREDATE, SAL and COMM of table SCOTT.EMP . The PTF combines these columns into the DOCUMENT column.

```
SELECT deptno, ename, document
FROM   to_doc(scott.emp, COLUMNS(empno,job,mgr,hiredate,sal,comm))
WHERE  deptno IN (10, 30)
ORDER BY 1, 2;


DEPTNO ENAME      DOCUMENT
------ ----------
--------------------------------------------------------------------------------
    10 CLARK      {"EMPNO":7782, "JOB":"MANAGER", "MGR":7839, "HIREDATE":"09-JUN-81",
"SAL":2450}
    10 KING       {"EMPNO":7839, "JOB":"PRESIDENT", "HIREDATE":"17-NOV-81", "SAL":5000}
    10 MILLER     {"EMPNO":7934, "JOB":"CLERK", "MGR":7782, "HIREDATE":"23-JAN-82",
"SAL":1300}
    30 ALLEN      {"EMPNO":7499, "JOB":"SALESMAN", "MGR":7698, "HIREDATE":"20-FEB-81",
"SAL":1600, "COMM":300}
    30 BLAKE      {"EMPNO":7698, "JOB":"MANAGER", "MGR":7839, "HIREDATE":"01-MAY-81",
"SAL":2850}
    30 JAMES      {"EMPNO":7900, "JOB":"CLERK", "MGR":7698, "HIREDATE":"03-DEC-81",
"SAL":950}
    30 MARTIN     {"EMPNO":7654, "JOB":"SALESMAN", "MGR":7698, "HIREDATE":"28-SEP-81",
"SAL":1250, "COMM":1400}
    30 TURNER     {"EMPNO":7844, "JOB":"SALESMAN", "MGR":7698, "HIREDATE":"08-SEP-81",
"SAL":1500, "COMM":0}
    30 WARD       {"EMPNO":7521, "JOB":"SALESMAN", "MGR":7698, "HIREDATE":"22-FEB-81",
"SAL":1250, "COMM":500}
```

With the subquery named E, display the DOC_ID and DOCUMENT columns. Report all clerk employees, their salary, department and department location. Use the to_doc PTF to combine the NAME, SAL, DEPTNO and LOC columns into the DOCUMENT column.

```
WITH e AS (
       SELECT ename name, sal, deptno, loc
         FROM scott.emp NATURAL JOIN scott.dept
        WHERE job = 'CLERK')
      SELECT ROWNUM doc_id, t.*
        FROM to_doc(e) t;


    DOC_ID DOCUMENT
---------- ----------------------------------------------------
         1 {"NAME":"MILLER", "SAL":1300, "DEPTNO":10, "LOC":"NEW YORK"}
         2 {"NAME":"SMITH", "SAL":800, "DEPTNO":20, "LOC":"DALLAS"}
         3 {"NAME":"ADAMS", "SAL":1100, "DEPTNO":20, "LOC":"DALLAS"}
         4 {"NAME":"JAMES", "SAL":950, "DEPTNO":30, "LOC":"CHICAGO"}
```

Use a subquery block to display c1, c2, c3 column values converted into the DOCUMENT column.

```
WITH t(c1,c2,c3)  AS (
    SELECT NULL, NULL, NULL FROM dual
    UNION ALL
    SELECT    1, NULL, NULL FROM dual
    UNION ALL
    SELECT NULL,    2, NULL FROM dual
    UNION ALL
    SELECT    0, NULL,    3 FROM dual)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  SELECT *
    FROM to_doc(t);


DOCUMENT
---------------
{}
{"C1":1}
{"C2":2}
{"C1":0, "C3":3}
```

For all employees in department 30, display the values of the member with property names `ENAME` and `COMM`. The PTF invocation reporting from the `SCOTT.EMP` table produces the `DOCUMENT` column which can be used as input to the `JSON_VALUE` function. This function selects a scalar value from some JSON data.

```
SELECT JSON_VALUE(document, '$.ENAME') ename,
       JSON_VALUE(document, '$.COMM')  comm
FROM   to_doc(scott.emp)
WHERE  JSON_VALUE(document, '$.DEPTNO') = 30;


ENAME      COMM
---------- ----
ALLEN      300
WARD       500
MARTIN     1400
BLAKE
TURNER     0
JAMES
```

Implicit_echo Polymorphic Table Function Example

The implicit_echo PTF example demonstrates that the USING clause is optional when the Polymorphic Table Function and the DESCRIBE function are defined in the same package.

Example 13-39 Implicit_echo Polymorphic Table Function Example

The `implicit_echo` PTF, takes in a table and a column and produces a new column with the same value.

This PTF returns the column in the input table tab, and adds to it the column listed in cols but with the column names prefixed with `"ECHO_"`.

Create the implementation package `implicit_echo_package` containing the `DESCRIBE` function, `implicit_echo` polymorphic table function (PTF) and `FETCH_ROWS` procedure.

```
CREATE PACKAGE implicit_echo_package AS
  prefix   DBMS_ID := '"ECHO_';

  FUNCTION DESCRIBE(tab   IN OUT DBMS_TF.TABLE_T,
                    cols  IN     DBMS_TF.COLUMNS_T)
           RETURN DBMS_TF.DESCRIBE_T;

  PROCEDURE FETCH_ROWS;

  -- PTF FUNCTION: WITHOUT USING CLAUSE --
  FUNCTION implicit_echo(tab TABLE, cols COLUMNS)
           RETURN TABLE PIPELINED ROW POLYMORPHIC;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
END implicit_echo_package;
```

Create the package containing the `DESCRIBE` function containing the input table parameter and the column parameter to be read. This function is invoked to determine the type of rows produced by the Polymorphic Table Function. The function returns a table `DBMS_TF.DESCRIBE_T`. The `FETCH_ROWS` procedure is required to produce the indicated read column along with a new column prefixed with `"ECHO_"` in the output rowset. The `implicit_echo` is the PTF function and contains two arguments, `tab` and `cols`, whose values are obtained from the query and this information is passed to the `DESCRIBE` function. The Row semantics specifies a PTF type but without the `USING` clause. This function is invoked from the SQL query.

Create the implementation package body `implicit_echo_package` which contains the PTF definition.

```
CREATE PACKAGE BODY implicit_echo_package AS

FUNCTION DESCRIBE(tab  IN  OUT DBMS_TF.TABLE_T,
                  cols IN      DBMS_TF.COLUMNS_T)
          RETURN DBMS_TF.DESCRIBE_T
AS
  new_cols DBMS_TF.COLUMNS_NEW_T;
  col_id   PLS_INTEGER := 1;

BEGIN
 FOR i in 1 .. tab.column.COUNT LOOP

   FOR j in 1 .. cols.COUNT LOOP

     IF (tab.column(i).description.name = cols(j)) THEN

       IF (NOT DBMS_TF.SUPPORTED_TYPE(tab.column(i).description.type)) THEN
            RAISE_APPLICATION_ERROR(-20102, 'Unsupported column type['||
                                    tab.column(i).description.type||']');
       END IF;

       tab.column(i).for_read := TRUE;
       new_cols(col_id)       := tab.column(i).description;
       new_cols(col_id).name  := prefix||

REGEXP_REPLACE(tab.column(i).description.name,

'^"|"$');
       col_id                 := col_id + 1;
       EXIT;

     END IF;

    END LOOP;

 END LOOP;

/* VERIFY ALL COLUMNS WERE FOUND */
 IF (col_id - 1 != cols.COUNT) then
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    RAISE_APPLICATION_ERROR(-20101,'Column mismatch['||col_id-1||'],
                                                    ['||cols.COUNT||']');
 END IF;

 RETURN DBMS_TF.DESCRIBE_T(new_columns => new_cols);

END;

 PROCEDURE FETCH_ROWS AS
     rowset DBMS_TF.ROW_SET_T;
 BEGIN
         DBMS_TF.GET_ROW_SET(rowset);
         DBMS_TF.PUT_ROW_SET(rowset);
 END;

END implicit_echo_package;
```

Invoke the PTF to display ENAME column of table `SCOTT.EMP` and display it along with another column `ECHO_ENAME` having the same value.

```
SELECT ENAME, ECHO_ENAME
FROM implicit_echo_package.implicit_echo(SCOTT.EMP, COLUMNS(SCOTT.ENAME));

ENAME      ECHO_ENAME
---------- ----------
SMITH      SMITH
ALLEN      ALLEN
WARD       WARD
JONES      JONES
MARTIN     MARTIN
BLAKE      BLAKE
CLARK      CLARK
SCOTT      SCOTT
KING       KING
TURNER     TURNER
ADAMS      ADAMS
JAMES      JAMES
FORD       FORD
MILLER     MILLER
```

Updating Large Tables in Parallel

The `DBMS_PARALLEL_EXECUTE` package lets you incrementally update the data in a large table in parallel, in two high-level steps:

1. Group sets of rows in the table into smaller chunks.
2. Apply the desired `UPDATE` statement to the chunks in parallel, committing each time you have finished processing a chunk.

This technique is recommended whenever you are updating a lot of data. Its advantages are:

- You lock only one set of rows at a time, for a relatively short time, instead of locking the entire table.
- You do not lose work that has been done if something fails before the entire operation finishes.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- You reduce rollback space consumption.
- You improve performance.

> **See Also**
>
> *Oracle Database PL/SQL Packages and Types Reference* for more information about the `DBMS_PARALLEL_EXECUTE` package

Collecting Data About User-Defined Identifiers

PL/Scope extracts, organizes, and stores data about PL/SQL and SQL identifiers and SQL statements from PL/SQL source text. You can retrieve the identifiers and statements data with the static data dictionary views `*_IDENTIFIERS` and *_STATEMENTS.

> **See Also**
>
> - PL/SQL Units and Compilation Parameters for more information about PLSQL_SETTINGS parameter
> - *Oracle Database Development Guide* for more information about using PL/Scope

Profiling and Tracing PL/SQL Programs

To help you isolate performance problems in large PL/SQL programs, PL/SQL provides these tools, implemented as PL/SQL packages.

Table 13-1 Profiling and Tracing Tools Summary

Tool	Package	Description
Profiler interface	`DBMS_PROFILER`	Computes the time that your PL/SQL program spends at each line and in each subprogram. You must have `CREATE` privileges on the units to be profiled. Saves runtime statistics in database tables, which you can query.
Trace interface	`DBMS_TRACE`	Traces the order in which subprograms run. You can specify the subprograms to trace and the tracing level. Saves runtime statistics in database tables, which you can query.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 13-1 (Cont.) Profiling and Tracing Tools Summary

Tool	Package	Description
PL/SQL hierarchical profiler	DBMS_HPROF	Reports the dynamic execution program profile of your PL/SQL program, organized by subprogram invocations. Accounts for SQL and PL/SQL execution times separately. Requires no special source or compile-time preparation. Generates reports in HTML. Provides the option of storing profiler data and results in relational format in database tables for custom report generation (such as third-party tools offer).
SQL trace	DBMS_APPLICATION_INFO	Uses the DBMS_APPLICATION_INFO package with Oracle Trace and the SQL trace facility to record names of executing modules or transactions in the database for later use when tracking the performance of various modules and debugging.
PL/SQL Basic Block Coverage	DBMS_PLSQL_CODE_COVERAGE	Collects and analyzes basic block coverage data.
Call Stack Utilities	UTL_CALL_STACK	Provides information about currently executing subprograms (such as subprogram names, unit names, owner names, edition names, and error stack information) that you can use to create more revealing error logs and application execution traces.

Related Topics

- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_APPLICATION_INFO package
- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_HPROF package
- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_PLSQL_CODE_COVERAGE package
- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_PROFILER package
- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_TRACE package

  Oracle Database PL/SQL Packages and Types Reference for more information about the UTL_CALL_STACK package
- COVERAGE Pragma for the syntax and semantics of COVERAGE PRAGMA
- *Oracle Database Development Guide* for more information about using PL/SQL basic block coverage
- *Oracle Database Development Guide* for a detailed description of PL/SQL hierarchical profiler
- *Oracle Database Development Guide* for more information about analyzing and debugging stored subprograms

Copyright © 1996, 2025, Oracle and/or its affiliates.

Compiling PL/SQL Units for Native Execution

You can usually speed up PL/SQL units by compiling them into native code (processor-dependent system code), which is stored in the SYSTEM tablespace.

You can natively compile any PL/SQL unit of any type, including those that Oracle Database supplies.

Natively compiled program units work in all server environments, including shared server configuration (formerly called "multithreaded server") and Oracle Real Application Clusters (Oracle RAC).

On most platforms, PL/SQL native compilation requires no special set-up or maintenance. On some platforms, the DBA might want to do some optional configuration.

See Also

- *Oracle Database Administrator's Guide* for information about configuring a database
- Platform-specific configuration documentation for your platform

You can test to see how much performance gain you can get by enabling PL/SQL native compilation.

If you have determined that PL/SQL native compilation will provide significant performance gains in database operations, Oracle recommends compiling the entire database for native mode, which requires DBA privileges. This speeds up both your own code and calls to the PL/SQL packages that Oracle Database supplies.

Topics

- Determining Whether to Use PL/SQL Native Compilation
- How PL/SQL Native Compilation Works
- Dependencies, Invalidation, and Revalidation
- Setting Up a New Database for PL/SQL Native Compilation*
- Compiling the Entire Database for PL/SQL Native or Interpreted Compilation*

* Requires DBA privileges.

Determining Whether to Use PL/SQL Native Compilation

Whether to compile a PL/SQL unit for native or interpreted mode depends on where you are in the development cycle and on what the program unit does.

While you are debugging program units and recompiling them frequently, interpreted mode has these advantages:

- You can use PL/SQL debugging tools on program units compiled for interpreted mode (but not for those compiled for native mode).
- Compiling for interpreted mode is faster than compiling for native mode.

Copyright © 1996, 2025, Oracle and/or its affiliates.

After the debugging phase of development, in determining whether to compile a PL/SQL unit for native mode, consider:

- PL/SQL native compilation provides the greatest performance gains for computation-intensive procedural operations. Examples are data warehouse applications and applications with extensive server-side transformations of data for display.
- PL/SQL native compilation provides the least performance gains for PL/SQL subprograms that spend most of their time running SQL.
- When many program units (typically over 15,000) are compiled for native execution, and are simultaneously active, the large amount of shared memory required might affect system performance.

How PL/SQL Native Compilation Works

Without native compilation, the PL/SQL statements in a PL/SQL unit are compiled into an intermediate form, system code, which is stored in the catalog and interpreted at run time.

With PL/SQL native compilation, the PL/SQL statements in a PL/SQL unit are compiled into native code and stored in the catalog. The native code need not be interpreted at run time, so it runs faster.

Because native compilation applies only to PL/SQL statements, a PL/SQL unit that uses only SQL statements might not run faster when natively compiled, but it does run at least as fast as the corresponding interpreted code. The compiled code and the interpreted code make the same library calls, so their action is the same.

The first time a natively compiled PL/SQL unit runs, it is fetched from the SYSTEM tablespace into shared memory. Regardless of how many sessions invoke the program unit, shared memory has only one copy it. If a program unit is not being used, the shared memory it is using might be freed, to reduce memory load.

Natively compiled subprograms and interpreted subprograms can invoke each other.

PL/SQL native compilation works transparently in an Oracle Real Application Clusters (Oracle RAC) environment.

The `PLSQL_CODE_TYPE` compilation parameter determines whether PL/SQL code is natively compiled or interpreted. For information about this compilation parameters, see "PL/SQL Units and Compilation Parameters".

Dependencies, Invalidation, and Revalidation

Recompilation is automatic with invalidated PL/SQL modules. For example, if an object on which a natively compiled PL/SQL subprogram depends changes, the subprogram is invalidated. The next time the same subprogram is called, the database recompiles the subprogram automatically. Because the `PLSQL_CODE_TYPE` setting is stored inside the library unit for each subprogram, the automatic recompilation uses this stored setting for code type.

Explicit recompilation does not necessarily use the stored `PLSQL_CODE_TYPE` setting. For the conditions under which explicit recompilation uses stored settings, see "PL/SQL Units and Compilation Parameters".

Setting Up a New Database for PL/SQL Native Compilation

If you have DBA privileges, you can set up a new database for PL/SQL native compilation by setting the compilation parameter `PLSQL_CODE_TYPE` to `NATIVE`. The performance benefits apply

Copyright © 1996, 2025, Oracle and/or its affiliates.

to the PL/SQL packages that Oracle Database supplies, which are used for many database operations.

> **Note**
>
> If you compile the whole database as `NATIVE`, Oracle recommends that you set `PLSQL_CODE_TYPE` at the system level.

Compiling the Entire Database for PL/SQL Native or Interpreted Compilation

If you have DBA privileges, you can recompile all PL/SQL modules in an existing database to `NATIVE` or `INTERPRETED`, using the `dbmsupgnv.sql` and `dbmsupgin.sql` scripts respectively during the process explained in this section. Before making the conversion, review "Determining Whether to Use PL/SQL Native Compilation".

> **Note**
>
> - If you compile the whole database as `NATIVE`, Oracle recommends that you set `PLSQL_CODE_TYPE` at the system level.
> - If Database Vault is enabled, then you can run `dbmsupgnv.sql` only if the Database Vault administrator has granted you the `DV_PATCH_ADMIN` role.
> - The conversion process described here affects only the current container's units. Units in other containers are not affected.

During the conversion to native compilation, `TYPE` specifications are not recompiled by `dbmsupgnv.sql` to `NATIVE` because these specifications do not contain executable code.

Package specifications seldom contain executable code so the runtime benefits of compiling to `NATIVE` are not measurable. You can use the `TRUE` command-line parameter with the `dbmsupgnv.sql` script to exclude package specs from recompilation to `NATIVE`, saving time in the conversion process.

When converting to interpreted compilation, the `dbmsupgin.sql` script does not accept any parameters and does not exclude any PL/SQL units.

> **Note**
>
> The following procedure describes the conversion to native compilation. If you must recompile all PL/SQL modules to interpreted compilation, make these changes in the steps.
>
> - Skip the first step.
> - Set the `PLSQL_CODE_TYPE` compilation parameter to `INTERPRETED` rather than `NATIVE`.
> - Substitute `dbmsupgin.sql` for the `dbmsupgnv.sql` script.

1. Ensure that a test PL/SQL unit can be compiled. For example:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
ALTER PROCEDURE my_proc COMPILE PLSQL_CODE_TYPE=NATIVE REUSE SETTINGS;
```

2. Shut down application services, the listener, and the database.
   - Shut down all of the Application services including the Forms Processes, Web Servers, Reports Servers, and Concurrent Manager Servers. After shutting down all of the Application services, ensure that all of the connections to the database were terminated.
   - Shut down the TNS listener of the database to ensure that no new connections are made.
   - Shut down the database in normal or immediate mode as the user `SYS`. See *Oracle Database Administrator's Guide*.
3. Set `PLSQL_CODE_TYPE` to `NATIVE` in the compilation parameter file. If the database is using a server parameter file, then set this after the database has started.

   The value of `PLSQL_CODE_TYPE` does not affect the conversion of the PL/SQL units in these steps. However, it does affect all subsequently compiled units, so explicitly set it to the desired compilation type.
4. Start up the database in upgrade mode, using the `UPGRADE` option. For information about SQL*Plus `STARTUP`, see *SQL*Plus User's Guide and Reference*.
5. Run this code to list the invalid PL/SQL units. You can save the output of the query for future reference with the SQL `SPOOL` statement:

   ```
   -- To save the output of the query to a file:
     SPOOL pre_update_invalid.log
   SELECT o.OWNER, o.OBJECT_NAME, o.OBJECT_TYPE
   FROM DBA_OBJECTS o, DBA_PLSQL_OBJECT_SETTINGS s
   WHERE o.OBJECT_NAME = s.NAME AND o.STATUS='INVALID';
   -- To stop spooling the output: SPOOL OFF
   ```

   If any Oracle supplied units are invalid, try to validate them by recompiling them. For example:

   ```
   ALTER PACKAGE SYS.DBMS_OUTPUT COMPILE BODY REUSE SETTINGS;
   ```

   If the units cannot be validated, save the spooled log for future resolution and continue.
6. Run this query to determine how many objects are compiled `NATIVE` and `INTERPRETED` (to save the output, use the SQL `SPOOL` statement):

   ```
   SELECT TYPE, PLSQL_CODE_TYPE, COUNT(*)
   FROM DBA_PLSQL_OBJECT_SETTINGS
   WHERE PLSQL_CODE_TYPE IS NOT NULL AND ORIGIN_CON_ID=SYS_CONTEXT('USERENV',
   'CON_ID')
   GROUP BY TYPE, PLSQL_CODE_TYPE
   ORDER BY TYPE, PLSQL_CODE_TYPE;
   ```

   Any objects with a `NULL` `plsql_code_type` are special internal objects and can be ignored.
7. Run the `$ORACLE_HOME/rdbms/admin/dbmsupgnv.sql` script as the user `SYS` to update the `plsql_code_type` setting to `NATIVE` in the dictionary tables for all PL/SQL units. This process also invalidates the units. Use `TRUE` with the script to exclude package specifications; `FALSE` to include the package specifications.

   This update must be done when the database is in `UPGRADE` mode. The script is guaranteed to complete successfully or rollback all the changes.
8. Shut down the database and restart in `NORMAL` mode.

Copyright © 1996, 2025, Oracle and/or its affiliates.

9. Before you run the `utlrp.sql` script, Oracle recommends that no other sessions are connected to avoid possible problems. You can ensure this with this statement:

   ```
   ALTER SYSTEM ENABLE RESTRICTED SESSION;
   ```

10. Run the `$ORACLE_HOME/rdbms/admin/utlrp.sql` script as the user `SYS`. This script recompiles all the PL/SQL modules using a default degree of parallelism. See the comments in the script for information about setting the degree explicitly.

    If for any reason the script is terminated atypically, rerun the `utlrp.sql` script to recompile any remaining invalid PL/SQL modules.

11. After the compilation completes successfully, verify that there are no invalid PL/SQL units using the query in step 5. You can spool the output of the query to the `post_upgrade_invalid.log` file and compare the contents with the `pre_upgrade_invalid.log` file, if it was created previously.

12. Re-run the query in step 6. If recompiling with `dbmsupgnv.sql`, confirm that all PL/SQL units, except `TYPE` specifications and package specifications if excluded, are `NATIVE`. If recompiling with `dbmsupgin.sql`, confirm that all PL/SQL units are `INTERPRETED`.

13. Disable the restricted session mode for the database, then start the services that you previously shut down. To disable restricted session mode, use this statement:

    ```
    ALTER SYSTEM DISABLE RESTRICTED SESSION;
    ```


Copyright © 1996, 2025, Oracle and/or its affiliates.

14

PL/SQL Language Elements

Summarizes the syntax and semantics of PL/SQL language elements and provides links to examples and related topics.

For instructions for reading the syntax diagrams, see *Oracle Database SQL Language Reference*.

Topics

- ACCESSIBLE BY Clause
- AGGREGATE Clause
- Assignment Statement
- AUTONOMOUS_TRANSACTION Pragma
- Basic LOOP Statement
- Block
- Call Specification
- CASE Statement
- CLOSE Statement
- Collection Method Invocation
- Collection Variable Declaration
- Comment
- COMPILE Clause
- Constant Declaration
- CONTINUE Statement
- COVERAGE Pragma
- Cursor FOR LOOP Statement
- Cursor Variable Declaration
- Datatype Attribute
- DEFAULT COLLATION Clause
- DELETE Statement Extension
- DEPRECATE Pragma
- DETERMINISTIC Clause
- Element Specification
- EXCEPTION_INIT Pragma
- Exception Declaration
- Exception Handler
- EXECUTE IMMEDIATE Statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

- EXIT Statement
- Explicit Cursor Declaration and Definition
- Expression
- FETCH Statement
- FOR LOOP Statement
- FORALL Statement
- Formal Parameter Declaration
- Function Declaration and Definition
- GOTO Statement
- IF Statement
- Implicit Cursor Attribute
- INLINE Pragma
- Invoker's Rights and Definer's Rights Clause
- INSERT Statement Extension
- Iterator
- Named Cursor Attribute
- NULL Statement
- OPEN Statement
- OPEN FOR Statement
- PARALLEL_ENABLE Clause
- PIPE ROW Statement
- PIPELINED Clause
- Procedure Declaration and Definition
- Qualified Expression
- RAISE Statement
- Record Variable Declaration
- RESTRICT_REFERENCES Pragma (deprecated)
- RETURN Statement
- RETURNING INTO Clause
- RESETTABLE Clause
- RESULT_CACHE Clause
- %ROWTYPE Attribute
- Scalar Variable Declaration
- SELECT INTO Statement
- SERIALLY_REUSABLE Pragma
- SHARING Clause
- SQL_MACRO Clause
- SQLCODE Function

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SQLERRM Function
- SUPPRESSES_WARNING_6009 Pragma
- %TYPE Attribute
- UDF Pragma
- UPDATE Statement Extensions
- WHILE LOOP Statement

See Also

- PL/SQL Language Fundamentals

ACCESSIBLE BY Clause

The `ACCESSIBLE BY` clause restricts access to a unit or subprogram by other units.

The **accessor list** explicitly lists those units which may have access. The accessor list can be defined on individual subprograms in a package. This list is checked in addition to the accessor list defined on the package itself (if any). This list may only restrict access to the subprogram – it cannot expand access. This code management feature is useful to prevent inadvertent use of internal subprograms. For example, it may not be convenient or feasible to reorganize a package into two packages: one for a small number of procedures requiring restricted access, and another one for the remaining units requiring public access.

The `ACCESSIBLE BY` clause may appear in the declarations of object types, object type bodies, packages, and subprograms.

The `ACCESSIBLE BY` clause can appear in the following SQL statements:

- ALTER TYPE Statement
- CREATE FUNCTION Statement
- CREATE PROCEDURE Statement
- CREATE PACKAGE Statement
- CREATE TYPE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Usage Notes
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***accessible_by_clause* ::=**



***accessor* ::=**



***unit_kind* ::=**



Semantics

accessible_by_clause

accessor

[*schema*.]*unit_name*

Specifies a stored PL/SQL unit that can invoke the entity.

Each `accessor` specifies another PL/SQL entity that may access the entity which includes the `ACCESSIBLE BY` clause.

When an `ACCESSIBLE BY` clause appears, only entities named in the clause may access the entity in which the clause appears.

An `accessor` may appear more than once in the `ACCESSIBLE BY` clause.

The `ACCESSIBLE BY` clause can appear only once in the unit declaration.

An entity named in an `accessor` is not required to exist.

When an entity with an `ACCESSIBLE BY` clause is invoked, it imposes an additional access check after all other checks have been performed. These checks are:

- The invoked unit must include an `accessor` with the same *unit_name* and *unit_kind* as the invoking unit.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- If the `accessor` includes a *schema*, the invoking unit must be in that *schema*.
- If the `accessor` does not include a *schema*, the invoker must be from the same schema as the invoked entity.

unit_kind

Specifies if the unit is a `FUNCTION`, `PACKAGE`, `PROCEDURE`, `TRIGGER`, or `TYPE`.

Usage Notes

The *unit_kind* is optional, but it is recommended to specify it to avoid ambiguity when units have the same name. For example, it is possible to define a trigger with the same name as a function.

The `ACCESSIBLE BY` clause allows access only when the call is direct. The check will fail if the access is through static SQL, `DBMS_SQL`, or dynamic SQL.

Any call to the initialization procedure of a package specification or package body will be checked against the *accessor* list of the package specification.

A unit can always access itself. An item in a unit can reference another item in the same unit.

RPC calls to a protected subprogram will always fail, since there is no context available to check the validity of the call, at either compile-time or run-time.

Calls to a protected subprogram from a conditional compilation directive will fail.

Examples

Example 14-1 Restricting Access to Top-Level Procedures in the Same Schema

This example shows that the top-level procedure top_protected_proc can only be called by procedure top_trusted_proc in the current schema. The user cannot call top_proctected_proc directly.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Restricting Access to Top-Level Procedures in the Same Schema

```
PROCEDURE top_protected_proc
  ACCESSIBLE BY (PROCEDURE top_trusted_proc)
AS
BEGIN
  DBMS_OUTPUT.PUT_LINE('Processed top_protected_proc.');
END;

PROCEDURE top_trusted_proc AS
BEGIN
  DBMS_OUTPUT.PUT_LINE('top_trusted_proc calls top_protected_proc');
  top_protected_proc;
END;


EXEC top_trusted_proc;
top_trusted_proc calls top_protected_proc
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Processed top_protected_proc.


EXEC top_protected_proc;
BEGIN top_protected_proc; END;

PLS-00904: insufficient privilege to access object TOP_PROTECTED_PROC
```

Example 14-2 Restricting Access to a Unit Name of Any Kind

This example shows that if the PL/SQL *unit_kind* is not specified in the `ACCESSIBLE BY` clause, then a call from any unit kind is allowed if the unit name matches. There is no compilation error if the *unit_kind* specified in the `ACCESSIBLE BY` clause does not match any existing objects. It is possible to define a trigger with the same name as a function. It is recommended to specify the *unit_kind*.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Restricting Access to a Unit Name of Any Kind

```
PROCEDURE protected_proc2
  ACCESSIBLE BY (top_trusted_f)
AS
BEGIN
  DBMS_OUTPUT.PUT_LINE('Processed protected_proc2.');
END;

FUNCTION top_protected_f RETURN NUMBER
ACCESSIBLE BY (TRIGGER top_trusted_f ) AS
BEGIN
   RETURN 0.5;
END top_protected_f;

FUNCTION top_trusted_f RETURN NUMBER AUTHID DEFINER IS
  FUNCTION g RETURN NUMBER DETERMINISTIC IS
  BEGIN
     RETURN 0.5;
  END g;
BEGIN
  protected_proc2;
  RETURN g() - DBMS_RANDOM.VALUE();
END top_trusted_f;

SELECT top_trusted_f FROM DUAL;
   .381773176

1 row selected.

Processed protected_proc2.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 14-3 Restricting Access to a Stored Procedure

This example shows a package procedure that can only be called by top_trusted_proc procedure. The `ACCESSIBLE BY` clause of a subprogram specification and body must match. A compilation error is raised if a call is made to an existing procedure with an `ACCESSIBLE BY` clause that does not include this procedure in its accessor list.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Restricting Access to a Stored Procedure

```
CREATE OR REPLACE PACKAGE protected_pkg
AS
  PROCEDURE public_proc;
  PROCEDURE private_proc ACCESSIBLE BY (PROCEDURE top_trusted_proc);
END;

CREATE OR REPLACE PACKAGE BODY protected_pkg
AS
  PROCEDURE public_proc AS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Processed protected_pkg.public_proc');
  END;
  PROCEDURE private_proc ACCESSIBLE BY (PROCEDURE top_trusted_proc) AS
  BEGIN
    DBMS_OUTPUT.PUT_LINE('Processed protected_pkg.private_proc');
  END;
END;

CREATE OR REPLACE PROCEDURE top_trusted_proc
AS
  BEGIN
     DBMS_OUTPUT.PUT_LINE('top_trusted_proc calls protected_pkg.private_proc
');
     protected_pkg.private_proc;
  END;

Procedure created.

EXEC top_trusted_proc;
top_trusted_proc calls protected_pkg.private_proc
Processed protected_pkg.private_proc

EXEC protected_pkg.private_proc
PLS-00904: insufficient privilege to access object PRIVATE_PROC
```

Related Topics

In this chapter:

- Function Declaration and Definition
- Procedure Declaration and Definition

Copyright © 1996, 2025, Oracle and/or its affiliates.

In other chapters:

- Nested, Package, and Standalone Subprograms
- Subprogram Properties
- Package Writing Guidelines

AGGREGATE Clause

Identifies the function as an **aggregate function**, or one that evaluates a group of rows and returns a single row.

You can specify aggregate functions in the select list, `HAVING` clause, and `ORDER BY` clause.

When you specify a user-defined aggregate function in a query, you can treat it as an **analytic function** (one that operates on a query result set). To do so, use the `OVER` *`analytic_clause`* syntax available for SQL analytic functions.

The `AGGREGATE` clause can appear in the CREATE FUNCTION Statement.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***aggregate_clause* ::=**



Semantics

aggregate_clause

AGGREGATE USING

Specify the name of the implementation type of the function.

[schema.] implementation_type

The implementation type must be an ADT containing the implementation of the `ODCIAggregate` subprograms. If you do not specify *`schema`*, then the database assumes that the implementation type is in your schema.

Restriction on AGGREGATE USING

You cannot specify the *aggregate_clause* for a nested function.

If you specify this clause, then you can specify only one input argument for the function.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

- Example 13-34, "Pipelined Table Function as Aggregate Function"

Related Topics

In this chapter:

- Function Declaration and Definition

In other books:

- *Oracle Database SQL Language Reference* for syntax and semantics of analytic functions
- *Oracle Database Data Cartridge Developer's Guide* for more information about user-defined aggregate functions
- *Oracle Database Data Cartridge Developer's Guide* for information about ODCI subprograms

Assignment Statement

The assignment statement sets the value of a data item to a valid value.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***assignment_statement* ::=**

(*expression* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***assignment_statement_target* ::=**

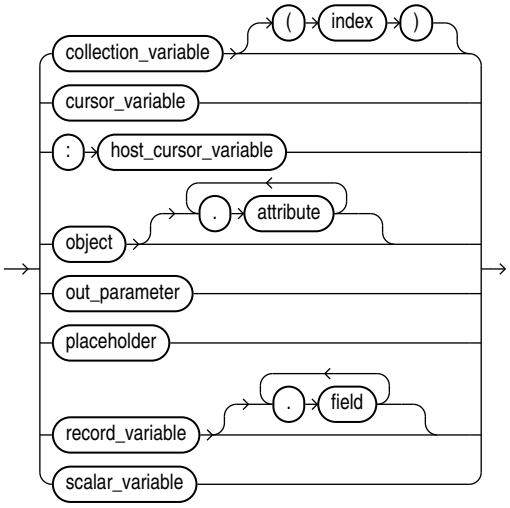

***placeholder* ::=**



Semantics

assignment_statement

expression

Expression whose value is to be assigned to *assignment_statement_target*.

expression and *assignment_statement_target* must have compatible data types.

> **Note**
>
> Collections with elements of the same type might not have the same data type. For the syntax of collection type definitions, see "Collection Variable Declaration".

assignment_statement_target

Data item to which the value of *expression* is to be assigned.

collection_variable

Name of a collection variable.

index

Index of an element of *collection_variable*. Without *index*, the entire collection variable is the assignment statement target.

Copyright © 1996, 2025, Oracle and/or its affiliates.

index must be a numeric expression whose data type either is `PLS_INTEGER` or can be implicitly converted to `PLS_INTEGER` (for information about the latter, see "Predefined PLS_INTEGER Subtypes").

cursor_variable

Name of a cursor variable.

:*host_cursor_variable*

Name of a cursor variable declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *host_cursor_variable*.

The data type of a host cursor variable is compatible with the return type of any PL/SQL cursor variable.

object

Name of an instance of an abstract data type (ADT).

attribute

Name of an attribute of *object*. Without *attribute*, the entire ADT is the assignment statement target.

out_parameter

Name of a formal `OUT` or `IN OUT` parameter of the subprogram in which the assignment statement appears.

record_variable

Name of a record variable.

field

Name of a field of *record_variable*. Without *field*, the entire record variable is the assignment statement target.

scalar_variable

Name of a PL/SQL scalar variable.

placeholder

:*host_variable*

Name of a variable declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *host_variable*.

:*indicator_variable*

Name of an indicator variable declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. (An indicator variable indicates the value or condition of its associated host variable. For example, in the Oracle Precompiler environment, an indicator variable can a detect null or truncated value in an output host variable.) Do not put space between *host_variable* and the colon (:) or between the colon and *indicator_variable*. This is correct:

```
:host_variable:indicator_variable
```

Examples

- Example 3-24, "Assigning Values to Variables with Assignment Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 3-27, "Assigning Value to BOOLEAN Variable"
- Example 6-14, "Data Type Compatibility for Collection Assignment"

Related Topics

In this chapter:

- "Expression"
- "FETCH Statement"
- "SELECT INTO Statement"

In other chapters:

- "Assigning Values to Variables"
- "Assigning Values to Collection Variables"
- "Assigning Values to Record Variables"

AUTONOMOUS_TRANSACTION Pragma

The `AUTONOMOUS_TRANSACTION` pragma marks a routine as **autonomous**; that is, independent of the main transaction.

In this context, a **routine** is one of these:

- Schema-level (not nested) anonymous PL/SQL block
- Standalone, package, or nested subprogram
- Method of an ADT
- Noncompound trigger

Topics

- Syntax
- Examples
- Related Topics

Syntax

***autonomous_trans_pragma* ::=**

Examples

- Example 7-43, "Declaring Autonomous Function in Package"
- Example 7-44, "Declaring Autonomous Standalone Procedure"
- Example 7-45, "Declaring Autonomous PL/SQL Block"
- Example 7-46, "Autonomous Trigger Logs INSERT Statements"
- Example 7-47, "Autonomous Trigger Uses Native Dynamic SQL for DDL"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 7-48, "Invoking Autonomous Function"

Related Topics

- Pragmas
- Autonomous Transactions

Basic LOOP Statement

With each iteration of the basic `LOOP` statement, its statements run and control returns to the top of the loop. The `LOOP` statement ends when a statement inside the loop transfers control outside the loop or raises an exception.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***basic_loop_statement* ::=**



(*statement* ::=)

Semantics

basic_loop_statement

statement

To prevent an infinite loop, at least one statement must transfer control outside the loop. The statements that can transfer control outside the loop are:

- "CONTINUE Statement" (when it transfers control to the next iteration of an enclosing labeled loop)
- "EXIT Statement"
- "GOTO Statement"
- "RAISE Statement"

label

A label that identifies *basic_loop_statement* (see "statement ::=" and "label"). `CONTINUE`, `EXIT`, and `GOTO` statements can reference this label.

Labels improve readability, especially when `LOOP` statements are nested, but only if you ensure that the label in the `END LOOP` statement matches a label at the beginning of the same `LOOP` statement (the compiler does not check).

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

Example 14-4 Nested, Labeled Basic LOOP Statements with EXIT WHEN Statements

In this example, one basic `LOOP` statement is nested inside the other, and both have labels. The inner loop has two `EXIT WHEN` statements; one that exits the inner loop and one that exits the outer loop.

```
DECLARE
  s  PLS_INTEGER := 0;
  i  PLS_INTEGER := 0;
  j  PLS_INTEGER;
BEGIN
  <<outer_loop>>
  LOOP
    i := i + 1;
    j := 0;
    <<inner_loop>>
    LOOP
      j := j + 1;
      s := s + i * j; -- Sum several products
      EXIT inner_loop WHEN (j > 5);
      EXIT outer_loop WHEN ((i * j) > 15);
    END LOOP inner_loop;
  END LOOP outer_loop;
  DBMS_OUTPUT.PUT_LINE
    ('The sum of products equals: ' || TO_CHAR(s));
END;
/
```

Result:

```
The sum of products equals: 166
```

Example 14-5 Nested, Unabeled Basic LOOP Statements with EXIT WHEN Statements

An `EXIT WHEN` statement in an inner loop can transfer control to an outer loop only if the outer loop is labeled.

In this example, the outer loop is not labeled; therefore, the inner loop cannot transfer control to it.

```
DECLARE
  i PLS_INTEGER := 0;
  j PLS_INTEGER := 0;

BEGIN
  LOOP
    i := i + 1;
    DBMS_OUTPUT.PUT_LINE ('i = ' || i);

    LOOP
      j := j + 1;
      DBMS_OUTPUT.PUT_LINE ('j = ' || j);
      EXIT WHEN (j > 3);
    END LOOP;

    DBMS_OUTPUT.PUT_LINE ('Exited inner loop');

    EXIT WHEN (i > 2);
  END LOOP;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  DBMS_OUTPUT.PUT_LINE ('Exited outer loop');
END;
/
```

Result:

```
i = 1
j = 1
j = 2
j = 3
j = 4
Exited inner loop
i = 2
j = 5
Exited inner loop
i = 3
j = 6
Exited inner loop
Exited outer loop

PL/SQL procedure successfully completed.
```

Related Topics

- "Cursor FOR LOOP Statement"
- "FOR LOOP Statement"
- "WHILE LOOP Statement"
- "Basic LOOP Statement"

Block

The **block**, which groups related declarations and statements, is the basic unit of a PL/SQL source program.

It has an optional declarative part, a required executable part, and an optional exception-handling part. Declarations are local to the block and cease to exist when the block completes execution. Blocks can be nested.

An anonymous block is an executable statement.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***plsql_block* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*body ::=*)

***declare_section* ::=**



(*item_list_2 ::=*)

***item_list_1* ::=**



(*cursor_declaration ::=*, *function_declaration ::=*, *item_declaration ::=*, *procedure_declaration ::=*, *type_definition ::=*)

***item_list_2* ::=**



(*cursor_declaration ::=*, *cursor_definition ::=*, *function_declaration ::=*, *function_definition ::=*, *procedure_declaration ::=*, *procedure_definition ::=*)

***type_definition* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*collection_type_definition ::=*, *record_type_definition ::=*, *ref_cursor_type_definition ::=*, *subtype_definition ::=*)

***subtype_definition* ::=**

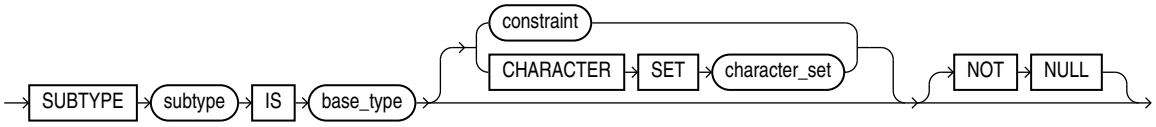

***constraint* ::=**



***item_declaration* ::=**



(*collection_variable_decl ::=*, *constant_declaration ::=*, *cursor_declaration ::=*, *cursor_variable_declaration ::=*, *exception_declaration ::=*, *record_variable_declaration ::=*, *variable_declaration ::=*)

***body* ::=**



(*exception_handler ::=*)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***statement* ::=**

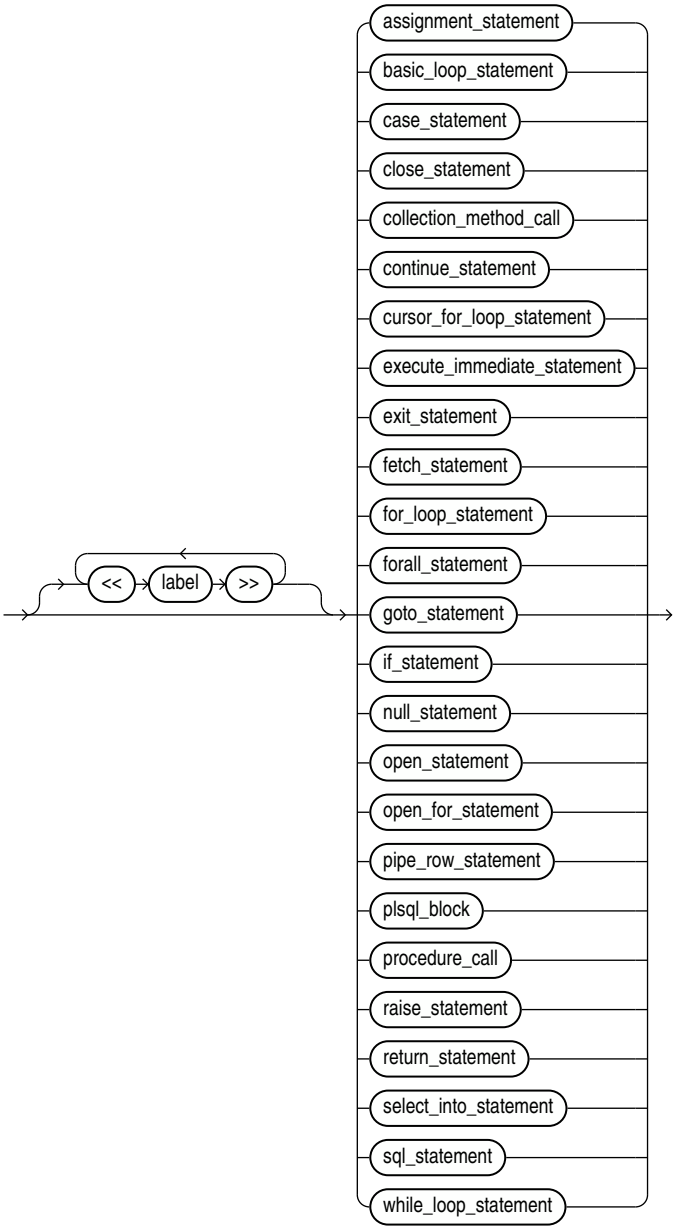

(*plsql_block* ::=, *procedure_call* ::=, *sql_statement* ::=)

***procedure_call* ::=**

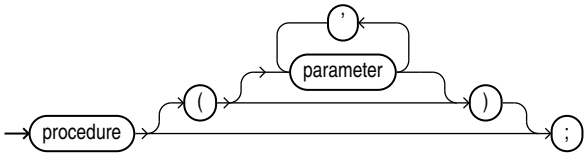

Copyright © 1996, 2025, Oracle and/or its affiliates.

***sql_statement* ::=**

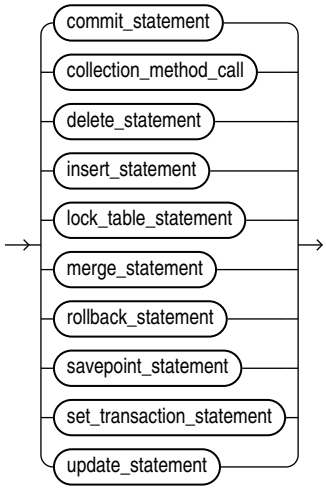

Semantics

plsql_block

label

Undeclared identifier, unique for the block.

DECLARE

Starts the declarative part of the block.

declare_section

Contains local declarations, which exist only in the block and its sub-blocks and are not visible to enclosing blocks.

Restrictions on *declare_section*

- A *declare_section* in *create_package*, *create_package_body*, or *compound_trigger_block* cannot include `PRAGMA AUTONOMOUS_TRANSACTION`.
- A *declare_section* in *trigger_body* or *tps_body* cannot declare variables of the data type `LONG` or `LONG RAW`.

> **See Also**
>
> - "CREATE PACKAGE Statement" for more information about *create_package*
> - "CREATE PACKAGE BODY Statement" for more information about *create_package_body*
> - "CREATE TRIGGER Statement" for more information about *compound_trigger_block*, *trigger_body*, and *tps_body*

Copyright © 1996, 2025, Oracle and/or its affiliates.

subtype_definition

Static expressions can be used in subtype declarations. See Static Expressions for more information.

subtype

Name of the user-defined subtype that you are defining.

base_type

Base type of the subtype that you are defining. *base_type* can be any scalar or user-defined PL/SQL datatype specifier such as `CHAR`, `DATE`, or `RECORD`.

CHARACTER SET *character_set*

Specifies the character set for a subtype of a character data type.

Restriction on CHARACTER SET *character_set*

Do not specify this clause if *base_type* is not a character data type.

NOT NULL

Imposes the `NOT NULL` constraint on data items declared with this subtype. For information about this constraint, see "NOT NULL Constraint".

constraint

Specifies a constraint for a subtype of a numeric data type.

Restriction on *constraint*

Do not specify *constraint* if *base_type* is not a numeric data type.

precision

Specifies the precision for a constrained subtype of a numeric data type.

Restriction on *precision*

Do not specify *precision* if *base_type* cannot specify precision.

scale

Specifies the scale for a constrained subtype of a numeric data type.

Restriction on *scale*

Do not specify *scale* if *base_type* cannot specify scale.

RANGE *low_value .. high_value*

Specifies the range for a constrained subtype of a numeric data type. The *low_value* and *high_value* must be numeric literals.

Restriction on RANGE *high_value .. low_value*

Specify this clause only if *base_type* is `PLS_INTEGER` or a subtype of `PLS_INTEGER` (either predefined or user-defined). (For a summary of the predefined subtypes of `PLS_INTEGER`, see Table 4-3. For information about user-defined subtypes with ranges, see "Constrained Subtypes".)

Copyright © 1996, 2025, Oracle and/or its affiliates.

body

BEGIN

Starts the executable part of the block, which contains executable statements.

EXCEPTION

Starts the exception-handling part of the block. When PL/SQL raises an exception, normal execution of the block stops and control transfers to the appropriate *`exception_handler`*. After the exception handler completes, execution resumes with the statement following the block. For more information about exception-handling, see PL/SQL Error Handling.

exception_handler

See "Exception Handler".

END

Ends the block.

name

The name of the block to which `END` applies—a label, function name, procedure name, or package name.

statement

label

Undeclared identifier, unique for the statement.

assignment_statement

See "Assignment Statement".

basic_loop_statement

See "Basic LOOP Statement".

case_statement

See "CASE Statement".

close_statement

See "CLOSE Statement".

collection_method_call

Invocation of one of these collection methods, which are procedures:

- `DELETE`
- `EXTEND`
- `TRIM`

For syntax, see "Collection Method Invocation".

continue_statement

See "CONTINUE Statement".

cursor_for_loop_statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

See "Cursor FOR LOOP Statement".

execute_immediate_statement

See "EXECUTE IMMEDIATE Statement".

exit_statement

See "EXIT Statement".

fetch_statement

See "FETCH Statement".

for_loop_statement

See "FOR LOOP Statement".

forall_statement

See "FORALL Statement".

goto_statement

See "GOTO Statement".

if_statement

See "IF Statement".

null_statement

See "NULL Statement".

open_statement

See "OPEN Statement".

open_for_statement

See "OPEN FOR Statement".

pipe_row_statement

See "PIPE ROW Statement".

Restriction on *pipe_row_statement*

This statement can appear only in the body of a pipelined table function; otherwise, PL/SQL raises an exception.

raise_statement

See "RAISE Statement".

return_statement

See "RETURN Statement".

select_into_statement

See "SELECT INTO Statement".

while_loop_statement

See "WHILE LOOP Statement".

Copyright © 1996, 2025, Oracle and/or its affiliates.

procedure_call

procedure

Name of the procedure that you are invoking.

***parameter* [, *parameter*]...**

List of actual parameters for the procedure that you are invoking. The data type of each actual parameter must be compatible with the data type of the corresponding formal parameter. The mode of the formal parameter determines what the actual parameter can be:

Formal Parameter Mode	Actual Parameter
`IN`	Constant, initialized variable, literal, or expression
`OUT`	Variable whose data type is not defined as `NOT NULL`
`IN OUT`	Variable (typically, it is a string buffer or numeric accumulator)

If the procedure specifies a default value for a parameter, you can omit that parameter from the parameter list. If the procedure has no parameters, or specifies a default value for every parameter, you can either omit the parameter list or specify an empty parameter list.

> **See Also**
>
> "Positional, Named, and Mixed Notation for Actual Parameters"

sql_statement

commit_statement

SQL `COMMIT` statement. For syntax, see *Oracle Database SQL Language Reference*.

delete_statement

SQL `DELETE` statement. For syntax, see *Oracle Database SQL Language Reference*. See also "DELETE Statement Extension".

insert_statement

SQL `INSERT` statement. For syntax, see *Oracle Database SQL Language Reference*. See also "INSERT Statement Extension".

lock_table_statement

SQL `LOCK TABLE` statement. For syntax, see *Oracle Database SQL Language Reference*.

merge_statement

SQL `MERGE` statement. For syntax, see *Oracle Database SQL Language Reference*.

rollback_statement

SQL `ROLLBACK` statement. For syntax, see *Oracle Database SQL Language Reference*.

savepoint_statement

SQL `SAVEPOINT` statement. For syntax, see *Oracle Database SQL Language Reference*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

set_transaction_statement

SQL `SET TRANSACTION` statement. For syntax, see *Oracle Database SQL Language Reference*.

update_statement

SQL `UPDATE` statement. For syntax, see *Oracle Database SQL Language Reference*. See also "UPDATE Statement Extensions".

Examples

- Example 2-1, "PL/SQL Block Structure"
- Example 3-23, "Block with Multiple and Duplicate Labels"

Related Topics

- "Comment"
- "Blocks"
- "Identifiers"
- "Pragmas"
- "PL/SQL Data Types"
- "User-Defined PL/SQL Subtypes"

Call Specification

A **call specification** declares a Java method, C language subprogram, or JavaScript function (either exported by a Multilingual Engine (MLE) module or declared inline as part of the `CREATE FUNCTION` and `CREATE PROCEDURE` DDL statements) so that it can be invoked from PL/SQL. You can also use the SQL `CALL` statement to invoke such a method or subprogram.

The call specification tells the database which JavaScript function, Java method, or which named subprogram in which shared library, to invoke when an invocation is made. It also tells the database what type conversions to make for the arguments and return value.

A **call specification** can appear in the following SQL statements:

- ALTER TYPE Statement
- CREATE FUNCTION Statement
- CREATE PROCEDURE Statement
- CREATE TYPE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Prerequisites

To invoke a call specification, you may need additional privileges, for example, `EXECUTE` privileges on a C library for a C call specification.

Syntax

***call_spec* ::=**



***java_declaration* ::=**

***javascript_declaration* ::=**

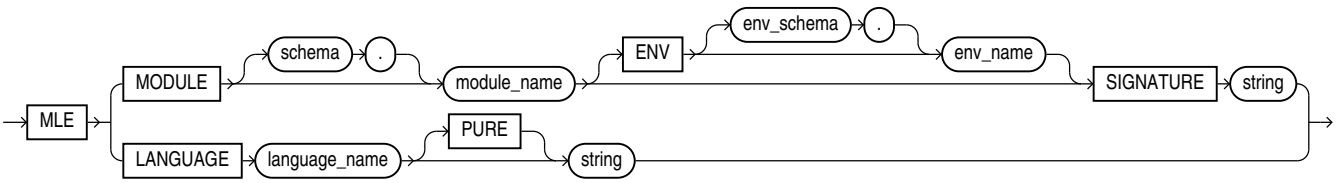

***c_declaration* ::=**

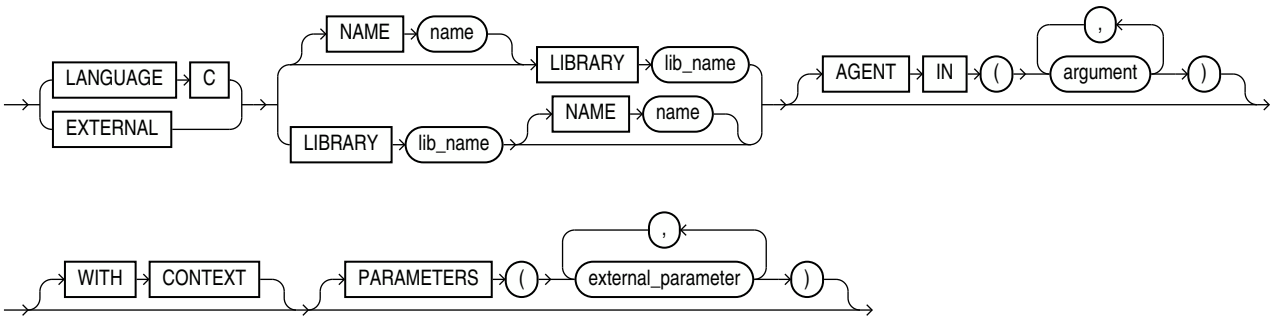

***external_parameter* ::=**

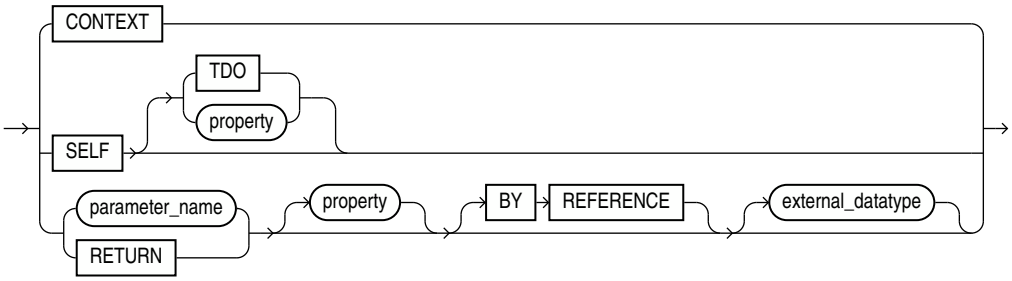

Copyright © 1996, 2025, Oracle and/or its affiliates.

***property* ::=**

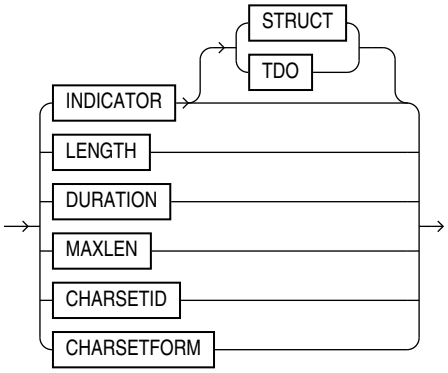

Semantics

call_spec

Maps a C procedure, Java method name, or JavaScript function name, parameter types, and return type to their SQL counterparts.

Call specifications can appear in PL/SQL standalone subprograms, package specifications and bodies, and type specifications and bodies. They cannot appear inside PL/SQL blocks.

java_declaration

string

Identifies the Java implementation of the method.

javascript_declaration

string

Identifies the JavaScript implementation of the function.

c_declaration

`LIBRARY` *lib_name*

Identifies a library created by the "CREATE LIBRARY Statement".

EXTERNAL

Deprecated way of declaring a C subprogram, supported only for backward compatibility. Use `EXTERNAL` in a C call specification if it contains defaulted arguments or constrained PL/SQL types, otherwise use the `LANGUAGE C` syntax.

Examples

Example 14-6 External Function Example

The hypothetical following statement creates a PL/SQL standalone function `get_val` that registers the C subprogram `c_get_val` as an external function. (The parameters have been omitted from this example.)

```
CREATE FUNCTION get_val
   ( x_val IN NUMBER,
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    y_val IN NUMBER,
    image IN LONG RAW )
  RETURN BINARY_INTEGER AS LANGUAGE C
     NAME "c_get_val"
     LIBRARY c_utils
     PARAMETERS (...);
```

Related Topics

In this chapter:

- Function Declaration and Definition
- Procedure Declaration and Definition

In other chapters:

- CREATE LIBRARY Statement
- External Subprograms

In other books:

- *Oracle AI Database SQL Language Reference* for information about the `CALL` statement
- *Oracle Database Development Guide* for information about restrictions on user-defined functions that are called from SQL statements
- *Oracle Database Java Developer's Guide* to learn how to write Java call specifications
- *Oracle Database Development Guide* to learn how to write C call specifications
- *Oracle Database JavaScript Developer's Guide* to learn how to write JavaScript call specifications

CASE Statement

The `CASE` statement chooses from a sequence of conditions and runs a corresponding statement.

The simple `CASE` statement evaluates a single expression and compares it to several potential values or expressions.

The searched `CASE` statement evaluates multiple Boolean expressions and chooses the first one whose value is `TRUE`.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***simple_case_statement* ::=**

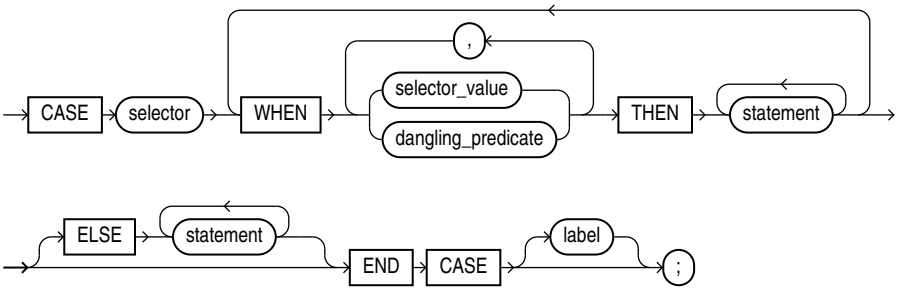

***searched_case_statement* ::=**

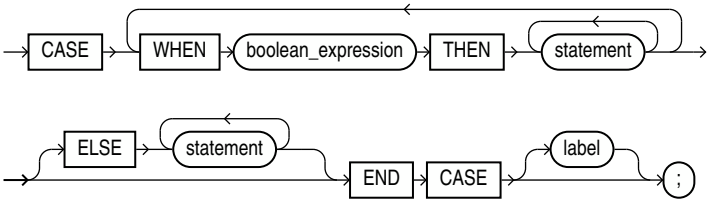

(*boolean_expression* ::=, *statement* ::=)

Semantics

simple_case_statement

selector

Expression whose value is evaluated once and used to select one of several alternatives. *selector* can have any PL/SQL data type except BLOB, BFILE, or a user-defined type.

WHEN { *selector_value* | *dangling_predicate* }

[, ..., { *selector_value* | *dangling_predicate* }] THEN *statement*

selector_value can be an expression of any PL/SQL type except BLOB, BFILE, or a user-defined type.

The *selector_values* and *dangling_predicates* are evaluated sequentially. If the value of a *selector_value* equals the value of *selector* or a *dangling_predicate* is true, then the *statement* associated with that *selector_value* or *dangling_predicate* runs, and the CASE statement ends. Any subsequent *selector_values* and *dangling_predicates* are not evaluated.

> ⚠ **Caution**
>
> A *statement* can modify the database and invoke nondeterministic functions. There is no fall-through mechanism, as there is in the C switch statement.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Currently, the dangling predicates `IS JSON` and `IS OF` are not supported.

ELSE *statement* [*statement*]...

The *statement*s run if and only if no *selector_value* has the same value as *selector* and no *dangling_predicate* is `TRUE`.

Without the `ELSE` clause, if no *selector_value* has the same value as *selector* and no *dangling_predicate* is true, the system raises the predefined exception `CASE_NOT_FOUND`.

label

A label that identifies the statement (see "*statement ::=*" and "*label*").

searched_case_statement

WHEN *boolean_expression* THEN *statement*

The *boolean_expression*s are evaluated sequentially. If the value of a *boolean_expression* is `TRUE`, the *statement* associated with that *boolean_expression* runs, and the `CASE` statement ends. Subsequent *boolean_expression*s are not evaluated.

> **Caution**
>
> A *statement* can modify the database and invoke nondeterministic functions. There is no fall-through mechanism, as there is in the C `switch` statement.

ELSE *statement* [*statement*]...

The *statement*s run if and only if no *boolean_expression* has the value `TRUE`.

Without the `ELSE` clause, if no *boolean_expression* has the value `TRUE`, the system raises the predefined exception `CASE_NOT_FOUND`.

label

A label that identifies the statement (see "*statement ::=*" and "*label*").

Examples

- Example 5-6, "Simple CASE Statement"
- Example 5-8, "Searched CASE Statement"

Related Topics

In this chapter:

- "IF Statement"

In other chapters:

- "CASE Expressions"
- "Conditional Selection Statements"
- "Simple CASE Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Searched CASE Statement"

> **See Also**
>
> - *Oracle Database SQL Language Reference* for information about the `NULLIF` function
> - *Oracle Database SQL Language Reference* for information about the `COALESCE` function

CLOSE Statement

The `CLOSE` statement closes a named cursor, freeing its resources for reuse.

After closing an explicit cursor, you can reopen it with the `OPEN` statement. You must close an explicit cursor before reopening it.

After closing a cursor variable, you can reopen it with the `OPEN FOR` statement. You need not close a cursor variable before reopening it.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***close_statement* ::=**



Semantics

close_statement

cursor

Name of an open explicit cursor.

cursor_variable

Name of an open cursor variable.

:host_cursor_variable

Name of a cursor variable declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *`host_cursor_variable`*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

- Example 7-6, "FETCH Statements Inside LOOP Statements"

Related Topics

In this chapter:

- "FETCH Statement"
- "OPEN Statement"
- "OPEN FOR Statement"

In other chapters:

- "Opening and Closing Explicit Cursors"
- "Opening and Closing Cursor Variables"

Collection Method Invocation

A collection method is a PL/SQL subprogram that either returns information about a collection or operates on a collection.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***collection_method_call* ::=**

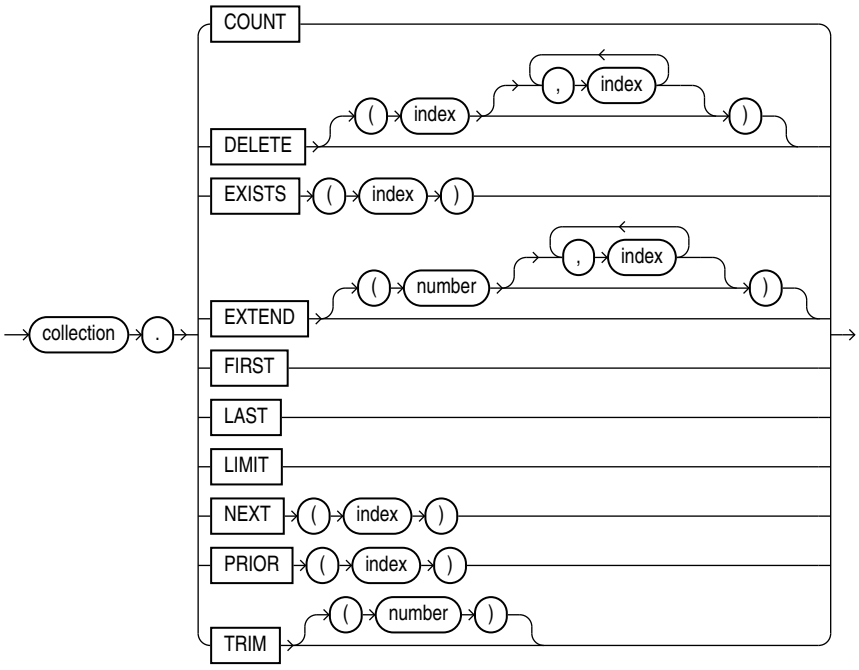

Semantics

collection_method_call

collection

Name of the collection whose method you are invoking.

COUNT

Function that returns the number of elements in the collection, explained in "COUNT Collection Method".

DELETE

Procedure that deletes elements from the collection, explained in "DELETE Collection Method".

Restriction on DELETE

If *collection* is a varray, you cannot specify indexes with `DELETE`.

index

Numeric expression whose data type either is `PLS_INTEGER` or can be implicitly converted to `PLS_INTEGER` (for information about the latter, see "s").

EXISTS

Function that returns `TRUE` if the *index*th element of the collection exists and `FALSE` otherwise, explained in "EXISTS Collection Method".

Copyright © 1996, 2025, Oracle and/or its affiliates.

EXTEND

Procedure that adds elements to the end of the collection, explained in "EXTEND Collection Method".

Restriction on EXTEND

You cannot use `EXTEND` if *`collection`* is an associative array.

FIRST

Function that returns the first index in the collection, explained in "FIRST and LAST Collection Methods".

LAST

Function that returns the last index in the collection, explained in "FIRST and LAST Collection Methods".

LIMIT

Function that returns the maximum number of elements that the collection can have. If the collection has no maximum size, then `LIMIT` returns `NULL`. For an example, see "LIMIT Collection Method".

NEXT

Function that returns the index of the succeeding existing element of the collection, if one exists. Otherwise, `NEXT` returns `NULL`. For more information, see "PRIOR and NEXT Collection Methods".

PRIOR

Function that returns the index of the preceding existing element of the collection, if one exists. Otherwise, `NEXT` returns `NULL`. For more information, see "PRIOR and NEXT Collection Methods".

TRIM

Procedure that deletes elements from the end of a collection, explained in "TRIM Collection Method".

Restriction on TRIM

You cannot use `TRIM` if *`collection`* is an associative array.

number

Number of elements to delete from the end of a collection. **Default:** one.

Examples

- Example 6-23, "DELETE Method with Nested Table"
- Example 6-24, "DELETE Method with Associative Array Indexed by String"
- Example 6-25, "TRIM Method with Nested Table"
- Example 6-26, "EXTEND Method with Nested Table"
- Example 6-27, "EXISTS Method with Nested Table"
- Example 6-28, "FIRST and LAST Values for Associative Array Indexed by PLS_INTEGER"
- Example 6-29, "FIRST and LAST Values for Associative Array Indexed by String"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 6-30, "Printing Varray with FIRST and LAST in FOR LOOP"
- Example 6-31, "Printing Nested Table with FIRST and LAST in FOR LOOP"
- Example 6-32, "COUNT and LAST Values for Varray"
- Example 6-33, "COUNT and LAST Values for Nested Table"
- Example 6-34, "LIMIT and COUNT Values for Different Collection Types"
- Example 6-35, "PRIOR and NEXT Methods"
- Example 6-36, "Printing Elements of Sparse Nested Table"

Related Topics

In this chapter:

- "Collection Variable Declaration"

In other chapters:

- "Collection Methods"

Collection Variable Declaration

A **collection variable** is a composite variable whose internal components, called elements, have the same data type.

The value of a collection variable and the values of its elements can change.

You reference an entire collection by its name. You reference a collection element with the syntax *`collection`*`(`*`index`*`)`.

PL/SQL has three kinds of collection types:

- Associative array (formerly called *PL/SQL table* or *index-by table*)
- Variable-size array (varray)
- Nested table

An associative array can be indexed by either a string type or `PLS_INTEGER`. Varrays and nested tables are indexed by integers.

You can create a collection variable in either of these ways:

- Define a collection type and then declare a variable of that type.
- Use `%TYPE` to declare a collection variable of the same type as a previously declared collection variable.

> **Note**
>
> This topic applies to collection types that you define inside a PL/SQL block or package, which differ from standalone collection types that you create with the "CREATE TYPE Statement".
>
> In a PL/SQL block or package, you can define all three collection types. With the `CREATE TYPE` statement, you can create nested table types and `VARRAY` types, but not associative array types.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***collection_type_definition* ::=**



***assoc_array_type_def* ::=**

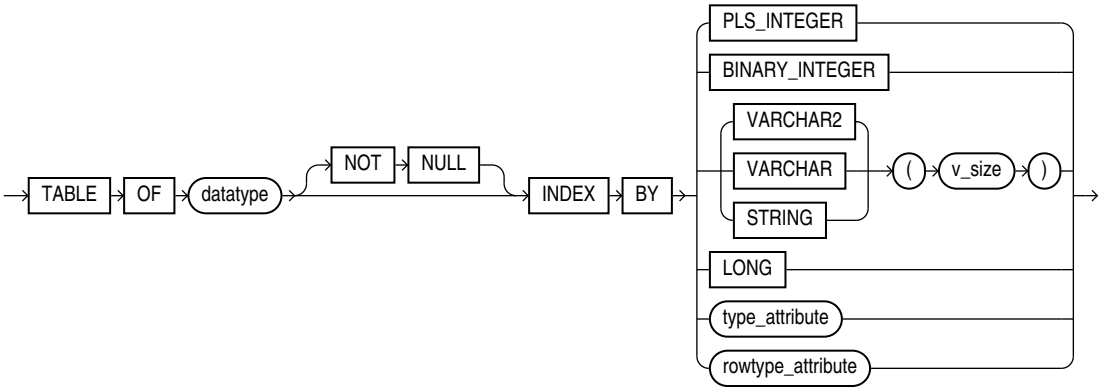

(*datatype* ::=, *rowtype_attribute* ::=, *type_attribute* ::=)

***varray_type_def* ::=**



(*datatype* ::=)

***nested_table_type_def* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*datatype* ::=)

***collection_variable_decl* ::=**

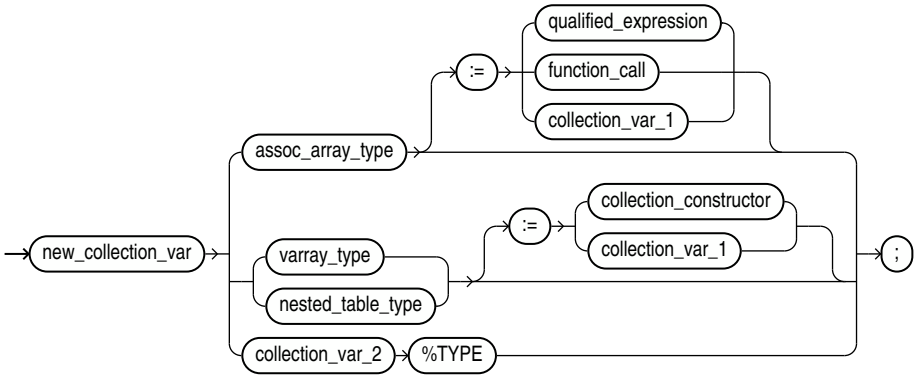

(*collection_constructor* ::=, *function_call* ::=, *qualified_expression* ::=)

Semantics

collection_type_definition

type

Name of the collection type that you are defining.

assoc_array_type_def

Type definition for an associative array.

Restriction on *assoc_array_type_def*

Can appear only in the declarative part of a block, subprogram, package specification, or package body.

datatype

Data type of the elements of the associative array. *datatype* can be any PL/SQL data type except `REF CURSOR`.

NOT NULL

Imposes the `NOT NULL` constraint on every element of the associative array. For information about this constraint, see "NOT NULL Constraint".

{ PLS_INTEGER | BINARY_INTEGER }

Specifies that the data type of the indexes of the associative array is `PLS_INTEGER`.

{ VARCHAR2 | VARCHAR | STRING } (*v_size*)

Specifies that the data type of the indexes of the associative array is `VARCHAR2` (or its subtype `VARCHAR` or `STRING`) with length *v_size*.

You can populate an element of the associative array with a value of any type that can be converted to `VARCHAR2` with the `TO_CHAR` function (described in *Oracle Database SQL Language Reference*).

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Caution**
>
> Associative arrays indexed by strings can be affected by National Language Support (NLS) parameters. For more information, see "NLS Parameter Values Affect Associative Arrays Indexed by String".

LONG

Specifies that the data type of the indexes of the associative array is `LONG`, which is equivalent to `VARCHAR2(32760)`.

> **Note**
>
> Oracle supports `LONG` only for backward compatibility with existing applications. For new applications, use `VARCHAR2(32760)`.

type_attribute, rowtype_attribute

Specifies that the data type of the indexes of the associative array is a data type specified with either `%ROWTYPE` or `%TYPE`. This data type must represent either `PLS_INTEGER`, `BINARY_INTEGER`, or `VARCHAR2(`*`v_size`*`)`.

varray_type_def

Type definition for a variable-size array.

size_limit

Maximum number of elements that the varray can have. *`size_limit`* must be an integer literal in the range from 1 through 2147483647.

datatype

Data type of the varray element. *`datatype`* can be any PL/SQL data type except `REF CURSOR`.

NOT NULL

Imposes the `NOT NULL` constraint on every element of the varray. For information about this constraint, see "NOT NULL Constraint".

nested_table_type_def

Type definition for a nested table.

datatype

Data type of the elements of the nested table. *`datatype`* can be any PL/SQL data type except `REF CURSOR` or `NCLOB`.

If *`datatype`* is a scalar type, then the nested table has a single column of that type, called `COLUMN_VALUE`.

If *`datatype`* is an ADT, then the columns of the nested table match the name and attributes of the ADT.

NOT NULL

Copyright © 1996, 2025, Oracle and/or its affiliates.

Imposes the `NOT NULL` constraint on every element of the nested table. For information about this constraint, see "NOT NULL Constraint".

collection_variable_decl

new_collection_var

Name of the collection variable that you are declaring.

assoc_array_type

Name of a previously defined associative array type; the data type of *`new_collection_var`*.

varray_type

Name of a previously defined `VARRAY` type; the data type of *`new_collection_var`*.

nested_table_type

Name of a previously defined nested table type; the data type of *`new_collection_var`*.

collection_constructor

Collection constructor for the data type of *`new_collection_var`*, which provides the initial value of *`new_collection_var`*.

collection_var_1

Name of a previously declared collection variable of the same data type as *`new_collection_var`*, which provides the initial value of *`new_collection_var`*.

> **Note**
>
> *`collection_var_1`* and *`new_collection_var`* must have the same data type, not only elements of the same type.

collection_var_2

Name of a previously declared collection variable.

%TYPE

See "%TYPE Attribute".

Examples

- Example 6-1, "Associative Array Indexed by String"
- Example 6-2, "Function Returns Associative Array Indexed by PLS_INTEGER"
- Example 6-4, "Varray (Variable-Size Array)"
- Example 6-5, "Nested Table of Local Type"
- Example 6-17, "Two-Dimensional Varray (Varray of Varrays)"
- Example 6-18, "Nested Tables of Nested Tables and Varrays of Integers"

Related Topics

- "Qualified Expressions Overview"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Collection Topics"
- "BULK COLLECT Clause"
- "CREATE TYPE Statement"
- "Collection Method Invocation"
- "FORALL Statement"
- "Record Variable Declaration"
- "%ROWTYPE Attribute"
- "%TYPE Attribute"

Comment

A comment is source program text that the PL/SQL compiler ignores. Its primary purpose is to document code, but you can also use it to disable obsolete or unfinished pieces of code (that is, you can turn the code into comments). PL/SQL has both single-line and multiline comments.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***comment* ::=**



Semantics

comment

--

Turns the rest of the line into a single-line comment. Any text that wraps to the next line is not part of the comment.

> ⚠ **Caution**
>
> Do not put a single-line comment in a PL/SQL block to be processed dynamically by an Oracle Precompiler program. The Oracle Precompiler program ignores end-of-line characters, which means that a single-line comment ends when the block ends.

/*

Begins a comment, which can span multiple lines.

Copyright © 1996, 2025, Oracle and/or its affiliates.

/

Ends a comment.

text

Any text.

Restriction on *text*

In a multiline comment, *text* cannot include the multiline comment delimiter `/*` or `*/`. Therefore, one multiline comment cannot contain another multiline comment. However, a multiline comment can contain a single-line comment.

Examples

- Example 3-6, "Single-Line Comments"
- Example 3-7, "Multiline Comments"

Related Topics

- "Comments"

COMPILE Clause

The compile clause explicitly recompiles a stored unit that has become invalid, thus eliminating the need for implicit runtime recompilation and preventing associated runtime compilation errors and performance overhead.

The `COMPILE` clause can appear in the following SQL statements:

- ALTER FUNCTION Statement
- ALTER PACKAGE Statement
- ALTER PROCEDURE Statement
- ALTER LIBRARY Statement
- ALTER TYPE Statement
- ALTER TRIGGER Statement

Topics

- Syntax
- Semantics
- Related Topics

Syntax

***compile_clause* ::=**

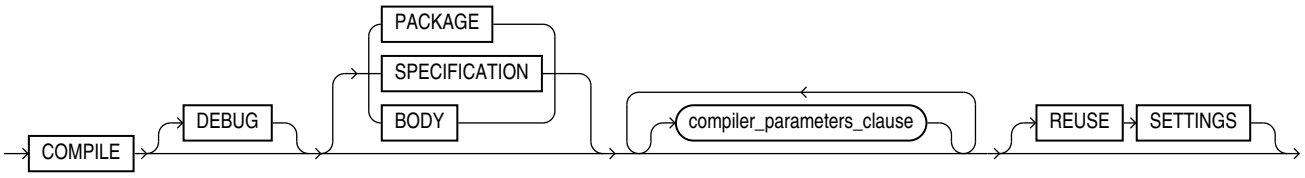

Copyright © 1996, 2025, Oracle and/or its affiliates.

***compiler_parameters_clause* ::=**



Semantics

compile_clause

COMPILE

Recompiles the PL/SQL unit, whether it is valid or invalid. The PL/SQL unit can be a library, package, package specification, package body, trigger, procedure, function, type, type specification, or type body.

First, if any of the objects upon which the unit depends are invalid, the database recompiles them.

The database also invalidates any local objects that depend upon the unit.

If the database recompiles the unit successfully, then the unit becomes valid. Otherwise, the database returns an error and the unit remains invalid. You can see the associated compiler error messages with the SQL*Plus command `SHOW ERRORS`.

During recompilation, the database drops all persistent compiler switch settings, retrieves them again from the session, and stores them after compilation. To avoid this process, specify the `REUSE SETTINGS` clause.

DEBUG

Has the same effect as `PLSQL_OPTIMIZE_LEVEL=1`—instructs the PL/SQL compiler to generate and store the code for use by the PL/SQL debugger. Oracle recommends using `PLSQL_OPTIMIZE_LEVEL=1` instead of `DEBUG`.

PACKAGE

(Default) Recompiles both the package specification and (if it exists) the package body, whether they are valid or invalid. The recompilation of the package specification and body lead to the invalidation and recompilation of dependent objects as described for `SPECIFICATION` and `BODY`.

Restriction on `PACKAGE`

`PACKAGE` may only appear if compiling a package.

SPECIFICATION

Recompiles only the package or type specification, whether it is valid or invalid. You might want to recompile a package or type specification to check for compilation errors after modifying the specification.

When you recompile a specification, the database invalidates any local objects that depend on the specification, such as procedures that invoke procedures or functions in the package. The body of a package also depends on its specification. If you subsequently reference one of these dependent objects without first explicitly recompiling it, then the database recompiles it implicitly at run time.

Restriction on `SPECIFICATION`

Copyright © 1996, 2025, Oracle and/or its affiliates.

`SPECIFICATION` may only appear if compiling a package or type specification.

BODY

Recompiles only the package or type body, whether it is valid or invalid. You might want to recompile a package or type body after modifying it. Recompiling a body does not invalidate objects that depend upon its specification.

When you recompile a package or type body, the database first recompiles the objects on which the body depends, if any of those objects are invalid. If the database recompiles the body successfully, then the body becomes valid.

Restriction on `BODY`

`BODY` may only appear if compiling a package or type body.

REUSE SETTINGS

Prevents Oracle Database from dropping and reacquiring compiler switch settings. With this clause, Oracle preserves the existing settings and uses them for the recompilation of any parameters for which values are not specified elsewhere in this statement.

See also DEFAULT COLLATION Clause compilation semantics.

compiler_parameters_clause

Specifies a value for a PL/SQL compilation parameter in Table 2-2. The compile-time value of each of these parameters is stored with the metadata of the PL/SQL unit being compiled.

You can specify each parameter only once in each statement. Each setting is valid only for the PL/SQL unit being compiled and does not affect other compilations in this session or system. To affect the entire session or system, you must set a value for the parameter using the `ALTER SESSION` or `ALTER SYSTEM` statement.

If you omit any parameter from this clause and you specify `REUSE SETTINGS`, then if a value was specified for the parameter in an earlier compilation of this PL/SQL unit, the database uses that earlier value. If you omit any parameter and either you do not specify `REUSE SETTINGS` or no value was specified for the parameter in an earlier compilation, then the database obtains the value for that parameter from the session environment.

Related Topics

In other books:

- *Oracle Database Development Guide* for information about debugging procedures
- *Oracle Database Development Guide* for information about debugging a trigger using the same facilities available for stored subprograms

Constant Declaration

A constant holds a value that does not change. A constant declaration specifies the name, data type, and value of the constant and allocates storage for it. The declaration can also impose the `NOT NULL` constraint.

Topics

- Syntax
- Semantics

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Examples
- Related Topics

Syntax

***constant_declaration* ::=**



(*datatype* ::=, *expression* ::=)

Semantics

constant_declaration

constant

Name of the constant that you are declaring.

datatype

Data type for which a variable can be declared with an initial value.

NOT NULL

Imposes the `NOT NULL` constraint on the constant.

For information about this constraint, see "NOT NULL Constraint".

expression

Initial value for the constant. *expression* must have a data type that is compatible with *datatype*. When *constant_declaration* is elaborated, the value of *expression* is assigned to *constant*.

Examples

- Example 3-12, "Constant Declarations"
- Example 3-13, "Variable and Constant Declarations with Initial Values"

Related Topics

In this chapter:

- "Collection Variable Declaration"
- "Record Variable Declaration"
- "%ROWTYPE Attribute"
- "Scalar Variable Declaration"
- "%TYPE Attribute"

In other chapters:

- "Declaring Constants"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Declaring Associative Array Constants"
- "Declaring Record Constants"

CONTINUE Statement

The `CONTINUE` statement exits the current iteration of a loop, either conditionally or unconditionally, and transfers control to the next iteration of either the current loop or an enclosing labeled loop.

If a `CONTINUE` statement exits a cursor `FOR` loop prematurely (for example, to exit an inner loop and transfer control to the next iteration of an outer loop), the cursor closes (in this context, `CONTINUE` works like `GOTO`).

The `CONTINUE WHEN` statement exits the current iteration of a loop when the condition in its `WHEN` clause is true, and transfers control to the next iteration of either the current loop or an enclosing labeled loop.

Each time control reaches the `CONTINUE WHEN` statement, the condition in its `WHEN` clause is evaluated. If the condition is not true, the `CONTINUE WHEN` statement does nothing.

Restrictions on CONTINUE Statement

- A `CONTINUE` statement must be inside a `LOOP` statement.
- A `CONTINUE` statement cannot cross a subprogram or method boundary.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***continue_statement* ::=**



(*boolean_expression* ::=)

Semantics

continue_statement

label

Name that identifies either the current loop or an enclosing loop.

Without *label*, the `CONTINUE` statement transfers control to the next iteration of the current loop. With *label*, the `CONTINUE` statement transfers control to the next iteration of the loop that *label* identifies.

WHEN *boolean_expression*

Copyright © 1996, 2025, Oracle and/or its affiliates.

Without this clause, the `CONTINUE` statement exits the current iteration of the loop unconditionally. With this clause, the `CONTINUE` statement exits the current iteration of the loop if and only if the value of *`boolean_expression`* is `TRUE`.

Examples

Example 14-7 CONTINUE Statement in Basic LOOP Statement

In this example, the `CONTINUE` statement inside the basic `LOOP` statement transfers control unconditionally to the next iteration of the current loop.

```
DECLARE
  x NUMBER := 0;
BEGIN
  LOOP -- After CONTINUE statement, control resumes here
    DBMS_OUTPUT.PUT_LINE ('Inside loop:  x = ' || TO_CHAR(x));
    x := x + 1;
    IF x < 3 THEN
      CONTINUE;
    END IF;
    DBMS_OUTPUT.PUT_LINE
      ('Inside loop, after CONTINUE:  x = ' || TO_CHAR(x));
    EXIT WHEN x = 5;
  END LOOP;

  DBMS_OUTPUT.PUT_LINE (' After loop:  x = ' || TO_CHAR(x));
END;
/
```

Result:

```
Inside loop:  x = 0
Inside loop:  x = 1
Inside loop:  x = 2
Inside loop, after CONTINUE:  x = 3
Inside loop:  x = 3
Inside loop, after CONTINUE:  x = 4
Inside loop:  x = 4
Inside loop, after CONTINUE:  x = 5
After loop:  x = 5
```

Example 14-8 CONTINUE WHEN Statement in Basic LOOP Statement

In this example, the `CONTINUE WHEN` statement inside the basic `LOOP` statement transfers control to the next iteration of the current loop when `x` is less than 3.

```
DECLARE
  x NUMBER := 0;
BEGIN
  LOOP -- After CONTINUE statement, control resumes here
    DBMS_OUTPUT.PUT_LINE ('Inside loop:  x = ' || TO_CHAR(x));
    x := x + 1;
    CONTINUE WHEN x < 3;
    DBMS_OUTPUT.PUT_LINE
      ('Inside loop, after CONTINUE:  x = ' || TO_CHAR(x));
    EXIT WHEN x = 5;
  END LOOP;
  DBMS_OUTPUT.PUT_LINE (' After loop:  x = ' || TO_CHAR(x));
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Inside loop:  x = 0
Inside loop:  x = 1
Inside loop:  x = 2
Inside loop, after CONTINUE:  x = 3
Inside loop:  x = 3
Inside loop, after CONTINUE:  x = 4
Inside loop:  x = 4
Inside loop, after CONTINUE:  x = 5
After loop:  x = 5
```

Related Topics

- "LOOP Statements" for more conceptual information
- "Basic LOOP Statement" for more information about labelling loops
- "Cursor FOR LOOP Statement"
- "EXIT Statement"
- "Expression"
- "FOR LOOP Statement"
- "WHILE LOOP Statement"

COVERAGE Pragma

The `COVERAGE` pragma marks PL/SQL code which is infeasible to test for coverage. These marks improve coverage metric accuracy.

The `COVERAGE` pragma marks PL/SQL source code to indicate that the code may not be feasibly tested for coverage. The pragma marks a specific code section. Marking infeasible code improves the quality of coverage metrics used to assess how much testing has been achieved.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

coverage_pragma ::=

***coverage_pragma_argument* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

coverage_pragma

The COVERAGE pragma may appear before any declaration or statement.

coverage_pragma_argument

The COVERAGE pragma argument must have one of these values:

- 'NOT_FEASIBLE'
- 'NOT_FEASIBLE_START'
- 'NOT_FEASIBLE_END'

When the COVERAGE pragma appear with the argument 'NOT_FEASIBLE', it marks the entire basic block that includes the beginning of the first declaration or statement that follows the pragma.

A COVERAGE pragma with an argument of 'NOT_FEASIBLE_START' may appear before any declaration or any statement. It must be followed by the COVERAGE pragma with an argument of 'NOT_FEASIBLE_END'. The second pragma may appear before any declaration or any statement. It must appear in the same PL/SQL block as the first pragma and not in any nested subprogram definition.

An associated pair of COVERAGE pragmas marks basic blocks infeasible from the beginning of the basic block that includes the beginning of the first statement or declaration that follows the first pragma to the end of the basic block that includes the first statement or declaration that follows the second pragma.

A COVERAGE pragma whose range includes the definition or declaration of an inner subprogram does not mark the blocks of that subprogram as infeasible.

Examples

Example 14-9 Marking a Single Basic Block as Infeasible to Test for Coverage

This example shows the placement of the pragma COVERAGE preceding the assignments to z and zl basic blocks. These two basic blocks will be ignored for coverage calculation. The first COVERAGE pragma (marked 1) marks the first assignment to z infeasible; the second (marked 2) marks the third assignment to z. In each case, the affected basic block runs from the identifier z to the following END IF.

```
IF (x>0) THEN
  y :=2;
ELSE
  PRAGMA COVERAGE ('NOT_FEASIBLE');  -- 1
  z:=3;
END IF;
IF (y>0) THEN
  z :=2;
ELSE
  PRAGMA COVERAGE ('NOT_FEASIBLE'); -- 2
  z :=3;
END IF;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 14-10 Marking a Line Range as Infeasible to Test for Coverage

This examples shows marking the entire line range as not feasible. A line range may contain more than one basic block. A line range is marked as not feasible for coverage using a pragma `COVERAGE` with a 'NOT_FEASIBLE_START' argument at the beginning of the range, and a pragma `COVERAGE` with a 'NOT_FEASIBLE_END' at the end of the range. The range paired `COVERAGE` pragmas mark all the blocks as infeasible.

```
PRAGMA COVERAGE ('NOT_FEASIBLE_START');
IF (x>0) THEN
  y :=2;
ELSE
  z:=3;
END IF;
IF (y>0) THEN
  z :=2;
ELSE
  z :=3;
END IF;
PRAGMA COVERAGE ('NOT_FEASIBLE_END');
```

Example 14-11 Marking Entire Units or Individual Subprograms as Infeasible to Test for Coverage

This example shows marking the entire procedure foo as not feasible for coverage. A subprogram is marked as completely infeasible by marking all of its body infeasible.

```
CREATE PROCEDURE foo IS
PRAGMA COVERAGE ('NOT_FEASIBLE_START');
......

BEGIN
....
PRAGMA COVERAGE ('NOT_FEASIBLE_END');
END;
/
```

Example 14-12 Marking Internal Subprogram as Infeasible to Test for Coverage

This example shows that the outer `COVERAGE` pragma pair has no effect on coverage inside procedure inner. The `COVERAGE` pragma (marked 1) inside the body of inner does mark the second assignment to x as infeasible. Notice that the entire body of procedure outer is marked infeasible even though the pragma with argument 'NOT_FEASIBLE_END' is not the last line. The pragma does mark the basic block that includes the statement that follows the pragma and that block does extend to the end of the procedure.

```
CREATE OR REPLACE PROCEDURE outer IS
   PRAGMA COVERAGE ('NOT_FEASIBLE_START');
   x NUMBER := 7;
   PROCEDURE inner IS
   BEGIN
     IF x < 6 THEN
        x := 19;
     ELSE
        PRAGMA COVERAGE ('NOT_FEASIBLE'); -- 1
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
        x := 203;
      END IF;
   END;
BEGIN
   DBMS_OUTPUT.PUT_LINE ('X= ');
   PRAGMA COVERAGE ('NOT_FEASIBLE_END');
   DBMS_OUTPUT.PUT_LINE (x);
END;
/
```

Related Topics

In this book:

- Pragmas
- PL/SQL Units and Compilation Parameters for more information about the PLSQL_OPTIMIZE_LEVEL compilation parameter

In other books:

- *Oracle AI Database Development Guide* for more information about using PL/SQL basic block coverage to maintain quality
- *Oracle AI Database PL/SQL Packages and Types Reference* for more information about using the DBMS_PLSQL_CODE_COVERAGE package

Cursor FOR LOOP Statement

The cursor `FOR LOOP` statement implicitly declares its loop index as a record variable of the row type that a specified cursor returns, and then opens a cursor.

With each iteration, the cursor `FOR LOOP` statement fetches a row from the result set into the record. When there are no more rows to fetch, the cursor `FOR LOOP` statement closes the cursor. The cursor also closes if a statement inside the loop transfers control outside the loop or raises an exception.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***cursor_for_loop_statement* ::=**

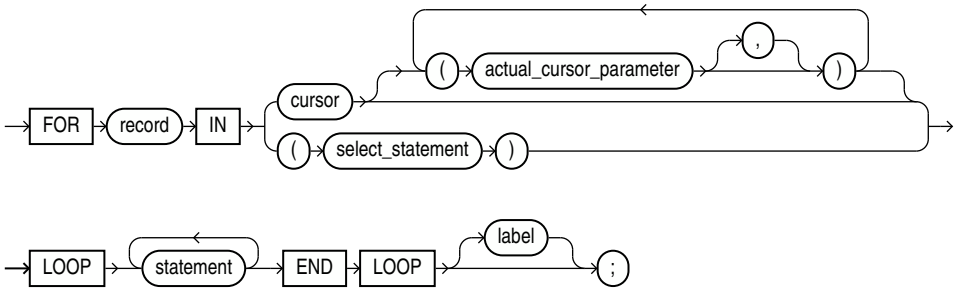

(*statement ::=*)

Semantics

cursor_for_loop_statement

record

Name for the loop index that the cursor `FOR LOOP` statement implicitly declares as a `%ROWTYPE` record variable of the type that *`cursor`* or *`select_statement`* returns.

`record` is local to the cursor `FOR LOOP` statement. Statements inside the loop can reference *`record`* and its fields. They can reference virtual columns only by aliases. Statements outside the loop cannot reference *`record`*. After the cursor `FOR LOOP` statement runs, *`record`* is undefined.

cursor

Name of an explicit cursor (not a cursor variable) that is not open when the cursor `FOR LOOP` is entered.

actual_cursor_parameter

Actual parameter that corresponds to a formal parameter of *`cursor`*.

select_statement

SQL `SELECT` statement (not PL/SQL `SELECT INTO` statement). For *`select_statement`*, PL/SQL declares, opens, fetches from, and closes an implicit cursor. However, because *`select_statement`* is not an independent statement, the implicit cursor is internal—you cannot reference it with the name `SQL`.

> **See Also**
>
> *Oracle Database SQL Language Reference* for `SELECT` statement syntax

label

Label that identifies *`cursor_for_loop_statement`* (see "*statement ::=*" and "*label*"). `CONTINUE`, `EXIT`, and `GOTO` statements can reference this label.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Labels improve readability, especially when `LOOP` statements are nested, but only if you ensure that the label in the `END LOOP` statement matches a label at the beginning of the same `LOOP` statement (the compiler does not check).

Examples

- Example 7-18, "Implicit Cursor FOR LOOP Statement"
- Example 7-19, "Explicit Cursor FOR LOOP Statement"
- Example 7-20, "Passing Parameters to Explicit Cursor FOR LOOP Statement"
- Example 7-21, "Cursor FOR Loop References Virtual Columns"

Related Topics

In this chapter:

- "Basic LOOP Statement"
- "CONTINUE Statement"
- "EXIT Statement"
- "Explicit Cursor Declaration and Definition"
- "FETCH Statement"
- "FOR LOOP Statement"
- "FORALL Statement"
- "OPEN Statement"
- "WHILE LOOP Statement"

In other chapters:

- "Processing Query Result Sets With Cursor FOR LOOP Statements"

Cursor Variable Declaration

A cursor variable is like an explicit cursor that is not limited to one query.

To create a cursor variable, either declare a variable of the predefined type `SYS_REFCURSOR` or define a `REF CURSOR` type and then declare a variable of that type.

Restrictions on Cursor Variables

- You cannot declare a cursor variable in a package specification.

  That is, a package cannot have a public cursor variable (a cursor variable that can be referenced from outside the package).
- You cannot store the value of a cursor variable in a collection or database column.
- You cannot use comparison operators to test cursor variables for equality, inequality, or nullity.
- Using a cursor variable in a server-to-server remote procedure call (RPC) causes an error. However, you can use a cursor variable in a server-to-server RPC if the remote database is a non-Oracle database accessed through a Procedural Gateway.

Topics

- Syntax

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Semantics
- Examples
- Related Topics

Syntax

***ref_cursor_type_definition* ::=**

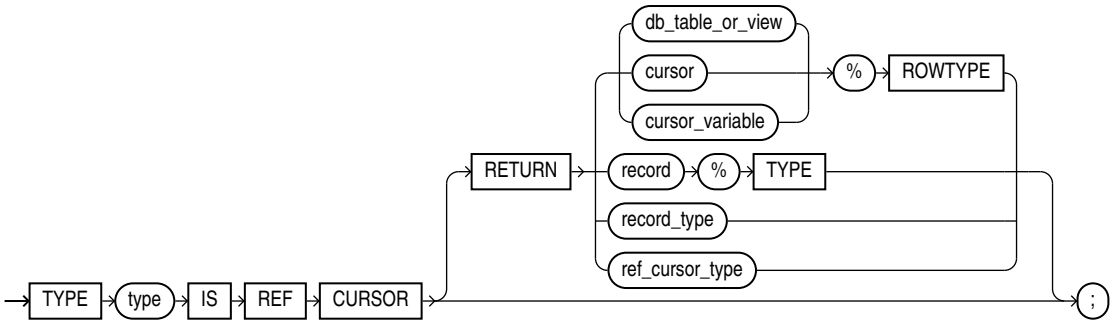

***cursor_variable_declaration* ::=**



Semantics

ref_cursor_type_definition

type

Name of the `REF CURSOR` type that you are defining.

RETURN

Specifies the data type of the value that the cursor variable returns.

Specify `RETURN` to define a strong `REF CURSOR` type. Omit `RETURN` to define a weak `REF CURSOR` type. For information about strong and weak `REF CURSOR` types, see "Creating Cursor Variables".

db_table_or_view

Name of a database table or view, which must be accessible when the declaration is elaborated.

cursor

Name of a previously declared explicit cursor.

cursor_variable

Name of a previously declared cursor variable.

record

Name of a user-defined record.

Copyright © 1996, 2025, Oracle and/or its affiliates.

record_type

Name of a user-defined type that was defined with the data type specifier `RECORD`.

ref_cursor_type

Name of a user-defined type that was defined with the data type specifier `REF CURSOR`.

cursor_variable_declaration

cursor_variable

Name of the cursor variable that you are declaring.

type

Type of the cursor variable that you are declaring—either `SYS_REFCURSOR` or the name of the `REF CURSOR` type that you defined previously.

`SYS_REFCURSOR` is a weak type. For information about strong and weak `REF CURSOR` types, see "Creating Cursor Variables".

Examples

- Example 7-24, "Cursor Variable Declarations"
- Example 7-25, "Cursor Variable with User-Defined Return Type"
- Example 7-28, "Variable in Cursor Variable Query—No Result Set Change"
- Example 7-29, "Variable in Cursor Variable Query—Result Set Change"
- Example 7-30, "Querying a Collection with Static SQL"
- Example 7-31, "Procedure to Open Cursor Variable for One Query"
- Example 7-32, "Opening Cursor Variable for Chosen Query (Same Return Type)"
- Example 7-33, "Opening Cursor Variable for Chosen Query (Different Return Types)"
- Example 7-34, "Cursor Variable as Host Variable in Pro*C Client Program"

Related Topics

In this chapter:

- "CLOSE Statement"
- "Named Cursor Attribute"
- "Explicit Cursor Declaration and Definition"
- "FETCH Statement"
- "OPEN FOR Statement"
- "%ROWTYPE Attribute"
- "%TYPE Attribute"

In other chapters:

- "Cursor Variables"
- "Passing CURSOR Expressions to Pipelined Table Functions"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Datatype Attribute

The data type attribute of an ADT element.

A `datatype` allows you to declare the data type of record variables fields, constants, functions return value, collection variables and collection types elements.

- Record Variable Declaration
- Constant Declaration
- Function Declaration and Definition
- Collection Variable Declaration
- CREATE FUNCTION Statement
- CREATE TYPE Statement

Topics

- Syntax
- Semantics
- Related Topics

Syntax

***datatype* ::=**

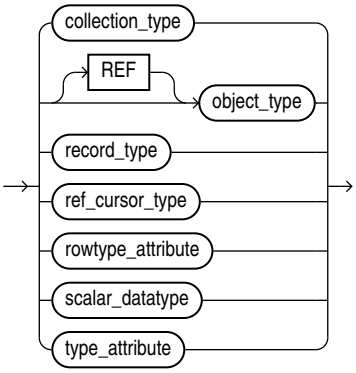

(*rowtype_attribute* ::=, *type_attribute* ::=)

Semantics

datatype

collection_type

Name of a user-defined varray or nested table type (not the name of an associative array type).

object_type

Instance of a user-defined type.

record_type

Copyright © 1996, 2025, Oracle and/or its affiliates.

Name of a user-defined type that was defined with the data type specifier `RECORD`.

ref_cursor_type

Name of a user-defined type that was defined with the data type specifier `REF CURSOR`.

scalar_datatype

Name of a scalar data type, including any qualifiers for size, precision, and character or byte semantics.

Related Topics

In other chapters:

- PL/SQL Data Types

DEFAULT COLLATION Clause

Collation (also called sort ordering) determines if a character string equals, precedes, or follows another string when the two strings are compared and sorted. Oracle Database collations order strings following rules for sorted text used in different languages.

The `DEFAULT COLLATION` clause can appear in the following SQL statements:

- CREATE FUNCTION Statement
- CREATE PROCEDURE Statement
- CREATE PACKAGE Statement
- CREATE TRIGGER Statement
- CREATE TYPE Statement

Topics

- Prerequisites
- Syntax
- Semantics
- Compilation Semantics
- Related Topics

Prerequisites

The `COMPATIBLE` initialization parameter must be set to at least 12.2.0, and `MAX_STRING_SIZE` must be set to `EXTENDED` for collation declarations to be allowed in these SQL statements.

Syntax

default_collation_clause **::=**

Copyright © 1996, 2025, Oracle and/or its affiliates.

***collation_option* ::=**



Semantics

default_collation_clause

The *default_collation_clause* can appear in a package specification, a standalone type specification, and in standalone subprograms.

collation_option

The default collation of a procedure, function, package, type, or trigger must be `USING_NLS_COMP`. The *default_collation_clause* explicitly declares the default collation of a PL/SQL unit to be `USING_NLS_COMP`. Without this clause, the unit inherits its default collation from the effective schema default collation. If the effective schema default collation is not `USING_NLS_COMP`, the unit is invalid.

The effective schema default collation is determined as follows:

- If the session parameter `DEFAULT_COLLATION` is set, the effective schema default collation is the value of this parameter. The value of the parameter can be checked by querying `SYS_CONTEXT('USERENV', 'SESSION_DEFAULT_COLLATION')`. The function returns `NULL` if `DEFAULT_COLLATION` is not set. The value of the parameter `DEFAULT_COLLATION` can be set with the statement: `ALTER SESSION SET DEFAULT_COLLATION` = *collation_option*;
- If the session parameter `DEFAULT_COLLATION` is not set, the effective schema default collation is the declared default collation of the schema in which you create the PL/SQL unit. The default collation of a schema can be found in the static data dictionary *_USERS views. It can be set with the DDL statements `CREATE USER` and `ALTER USER`.

The session parameter `DEFAULT_COLLATION` can be unset with the statement: `ALTER SESSION SET DEFAULT_COLLATION = NONE;`

Package body and type body use the default collation of the corresponding specification. All character data containers and attributes in procedures, functions and methods, including parameters and return values, behave as if their data-bound collation were the pseudo-collation `USING_NLS_COMP`.

Restrictions on `DEFAULT COLLATION`

It cannot be specified for nested or packaged subprograms or for type methods.

Compilation Semantics

If the resulting default object collation is different from `USING_NLS_COMP`, the database object is created as invalid with a compilation error.

If the `ALTER COMPILE` statement is issued for a PL/SQL unit with the `REUSE SETTINGS` clause, the stored default collation of the database object being compiled is not changed.

If an `ALTER COMPILE` statement is issued without the `REUSE SETTINGS` clause, the stored default collation of the database object being compiled is discarded and the effective schema default collation for the object owner at the time of execution of the statement is stored as the default collation of the object, unless the PL/SQL unit contains the `DEFAULT COLLATION` clause. If the resulting default collation is not `USING_NLS_COMP`, a compilation error is raised.

Copyright © 1996, 2025, Oracle and/or its affiliates.

An `ALTER COMPILE` statement for a package or type body references the stored collation of the corresponding specification.

Related Topics

In other chapters:

- ALTER FUNCTION Statement
- ALTER PACKAGE Statement
- ALTER PROCEDURE Statement
- ALTER TRIGGER Statement
- ALTER TYPE Statement

In other books :

- *Oracle Database Globalization Support Guide* for more information about specifying data-bound collation for PL/SQL units
- *Oracle Database Globalization Support Guide* for more information about effective schema default collation

DELETE Statement Extension

The PL/SQL extension to the *`where_clause`* of the SQL `DELETE` statement lets you specify a `CURRENT OF` clause, which restricts the `DELETE` statement to the current row of the specified cursor.

For information about the `CURRENT OF` clause, see "UPDATE Statement Extensions".

> **See Also**
>
> *Oracle Database SQL Language Reference* for the syntax of the SQL `DELETE` statement

DEPRECATE Pragma

The `DEPRECATE` pragma marks a PL/SQL element as deprecated. The compiler issues warnings for uses of pragma `DEPRECATE` or of deprecated elements.

The associated warnings tell users of a deprecated element that other code may need to be changed to account for the deprecation.

Topics

- Syntax
- Semantics
- DEPRECATE Pragma Compilation Warnings
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

deprecate_pragma ::=

Semantics

deprecate_pragma

The `DEPRECATE` pragma may only appear in the declaration sections of a package specification, an object specification, a top level procedure, or a top level function.

PL/SQL elements of these kinds may be deprecated:

- Subprograms
- Packages
- Variables
- Constants
- Types
- Subtypes
- Exceptions
- Cursors

The `DEPRECATE` pragma may only appear in the declaration section of a PL/SQL unit. It must appear immediately after the declaration of an item to be deprecated.

The `DEPRECATE` pragma applies to the PL/SQL element named in the declaration which precedes the pragma.

When the `DEPRECATE` pragma applies to a package specification, object specification, or subprogram, the pragma must appear immediately after the keyword `IS` or `AS` that terminates the declaration portion of the definition.

When the `DEPRECATE` pragma applies to a package or object specification, references to all the elements (of the kinds that can be deprecated) that are declared in the specification are also deprecated.

If the `DEPRECATE` pragma applies to a subprogram declaration, only that subprogram is affected; other overloads with the same name are not deprecated.

If the optional custom message appears in a use of the `DEPRECATE` pragma, the custom message will be added to the warning issued for any reference to the deprecated element.

The identifier in a `DEPRECATE` pragma must name the element in the declaration to which it applies.

Deprecation is inherited during type derivation. A child object type whose parent is deprecated is not deprecated. Only the attributes and methods that are inherited are deprecated.

When the base type is not deprecated but individual methods or attributes are deprecated, and when a type is derived from this type and the deprecated type or method is inherited, then references to these through the derived type will cause the compiler to issue a warning.

Copyright © 1996, 2025, Oracle and/or its affiliates.

A reference to a deprecated element appearing anywhere except in the unit with the deprecation pragma or its body, will cause the PL/SQL compiler to issue a warning for the referenced elements. A reference to a deprecated element in an anonymous block will not cause the compiler to issue a warning; only references in named entities will draw a warning.

When a deprecated entity is referenced in the definition of another deprecated entity then no warning will be issued.

When an older client code refers to a deprecated entity, it is invalidated and recompiled. No warning is issued.

There is no effect when SQL code directly references a deprecated element.

A reference to a deprecated element in a PL/SQL static SQL statement may cause the PL/SQL compiler to issue a warning. However, such references may not be detectable.

pls_identifier

Identifier of the PL/SQL element being deprecated.

character_literal

An optional compile-time warning message.

DEPRECATE Pragma Compilation Warnings

The PL/SQL compiler issues warnings when the `DEPRECATE` pragma is used and when deprecated items are referenced.

- 6019 — The entity was deprecated and could be removed in a future release. Do not use the deprecated entity.
- 6020 — The referenced entity was deprecated and could be removed in a future release. Do not use the deprecated entity. Follow the specific instructions in the warning if any are given.
- 6021 — Misplaced pragma. The pragma `DEPRECATE` should follow immediately after the declaration of the entity that is being deprecated. Place the pragma immediately after the declaration of the entity that is being deprecated.
- 6022 — This entity cannot be deprecated. Deprecation only applies to entities that may be declared in a package or type specification as well as to top-level procedure and function definitions. Remove the pragma.

The `DEPRECATE` pragma warnings may be managed with the `PLSQL_WARNINGS` parameter or with the DBMS_WARNING package.

Examples

Example 14-13 Enabling the Deprecation Warnings

This example shows how to set the PLSQL_WARNINGS parameter to enable these warnings in a session.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Restricting Access to Top-Level Procedures in the Same Schema

```
ALTER SESSION SET PLSQL_WARNINGS='ENABLE:(6019,6020,6021,6022)';
```

Example 14-14 Deprecation of a PL/SQL Package

This example shows the deprecation of a PL/SQL package as a whole. Warnings will be issued for any reference to package pack1, and to the procedures foo and bar when used outside of the package and its body.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of a PL/SQL Package

```
PACKAGE pack1 AS
PRAGMA DEPRECATE(pack1);
 PROCEDURE foo;
 PROCEDURE bar;
END pack1;
```

Example 14-15 Deprecation of a PL/SQL Package with a Custom Warning

This example shows the deprecation of a PL/SQL package. The compiler issues a custom warning message when a reference in another unit for the deprecated procedure foo is compiled.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of a PL/SQL Package with a Custom Warning

```
PACKAGE pack5 AUTHID DEFINER AS
PRAGMA DEPRECATE(pack5 , 'Package pack5 has been deprecated, use new_pack5
instead.');
 PROCEDURE foo;
 PROCEDURE bar;
END pack5;
```

A reference to procedure pack5.foo in another unit would draw a warning like this.

```
SP2-0810: Package Body created with compilation warnings

Errors for PACKAGE BODY PACK6:
4/10     PLW-06020: reference to a deprecated entity: PACK5 declared in unit
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
PACK5[1,9].
        Package pack5 has been deprecated, use new_pack5 instead
```

Example 14-16 Deprecation of a PL/SQL Procedure

This example shows the deprecation of a single PL/SQL procedure foo in package pack7.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of a PL/SQL Procedure

```
PACKAGE pack7 AUTHID DEFINER AS
  PROCEDURE foo;
  PRAGMA DEPRECATE (foo, 'pack7.foo is deprecated, use pack7.bar instead.');
  PROCEDURE bar;
END pack7;
```

Example 14-17 Deprecation of an Overloaded Procedure

This example shows the `DEPRECATE` pragma applies only to a specific overload of a procedure name. Only the second declaration of proc1 is deprecated.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of an Overloaded Procedure

```
PACKAGE pack2 AS
  PROCEDURE proc1(n1 NUMBER, n2 NUMBER, n3 NUMBER);
  -- Only the overloaded procedure with 2 arguments is deprecated
  PROCEDURE proc1(n1 NUMBER, n2 NUMBER);
      PRAGMA DEPRECATE(proc1);
 END pack2;
```

Example 14-18 Deprecation of a Constant and of an Exception

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of a Constant and of an Exception

This example shows the deprecation of a constant and of an exception.

```
PACKAGE trans_data AUTHID DEFINER AS
   TYPE Transrec IS RECORD (
     accounttype VARCHAR2(30) ,
     ownername VARCHAR2(30) ,
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    balance REAL
  );
  min_balance constant real := 10.0;
  PRAGMA DEPRECATE(min_balance , 'Minimum balance requirement has been
removed.');
  insufficient_funds EXCEPTION;
  PRAGMA DEPRECATE (insufficient_funds , 'Exception no longer raised.');
END trans_data;
```

Example 14-19 Using Conditional Compilation to Deprecate Entities in Some Database Releases

This example shows the deprecation of procedure proc1 if the database release version is greater than 11.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Using Conditional Compilation to Deprecate Entities in Some Database Releases

```
CREATE PACKAGE pack11 AUTHID DEFINER AS
 $IF DBMS_DB_VERSION.VER_LE_11
 $THEN
    PROCEDURE proc1;
 $ELSE
    PROCEDURE proc1;
    PRAGMA DEPRECATE(proc1);
 $END
 PROCEDURE proc2;
 PROCEDURE proc3;
END pack11;
```

Example 14-20 Deprecation of an Object Type

This example shows the deprecation of an entire object type.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of an Object Type

```
TYPE type01 AS OBJECT(
   PRAGMA DEPRECATE (type01),
   y NUMBER,
   MEMBER PROCEDURE proc(x NUMBER),
   MEMBER PROCEDURE proc2(x NUMBER)
);
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 14-21 Deprecation of a Member Function in an Object Type Specification

This example shows the deprecation of member function add2 in an object type specification.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of a Member Function in an Object Type Specification

```
TYPE objdata AS OBJECT(
  n1 NUMBER ,
  n2 NUMBER ,
  n3 NUMBER ,
  MEMBER FUNCTION add2 RETURN NUMBER ,
   PRAGMA DEPRECATE (add2),
  MEMBER FUNCTION add_all RETURN NUMBER
 );
```

Example 14-22 Deprecation of Inherited Object Types

This example shows that a reference to a deprecated entity x declared in unit type15_basetype type body will cause the compiler to issue a warning.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation of Inherited Object Types

```
TYPE type15_basetype AS OBJECT
(
  x1 NUMBER,
  x  NUMBER,
  PRAGMA DEPRECATE (x),
  MEMBER PROCEDURE f0 ,
  PRAGMA DEPRECATE (f0),
  MEMBER PROCEDURE f1 ,
  PRAGMA DEPRECATE (f1),
  MEMBER PROCEDURE f2 ,
  PRAGMA DEPRECATE (f2),
  MEMBER PROCEDURE f3) NOT FINAL;


TYPE BODY type15_basetype AS
   MEMBER PROCEDURE f0
   IS
   BEGIN
     x := 1;
   END;
   MEMBER PROCEDURE f1
   IS
   BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    x := 1;
  END;

  MEMBER PROCEDURE f2
  IS
  BEGIN
    x := 1;
  END;

  MEMBER PROCEDURE f3
  IS
  BEGIN
    x := 1;
  END;
END;
```

References to the deprecated entities x, f0, and f2 in type15_basetype type body will cause the compiler to issue a warning.

```
TYPE type15_subtype UNDER type15_basetype (
  y NUMBER ,
  MEMBER PROCEDURE f1(z NUMBER),
  MEMBER PROCEDURE f1(z NUMBER , m1 NUMBER),
  PRAGMA DEPRECATE(f1),
  OVERRIDING MEMBER PROCEDURE f2
);


TYPE BODY type15_subtype AS
   MEMBER PROCEDURE f1(z NUMBER)
IS
BEGIN
  -- deprecation attribute inherited in derived type.
  x := 1;
  x1:= 2;
  SELF.f0;
END;

  MEMBER PROCEDURE f1(z  NUMBER ,
                      m1 NUMBER)
  IS
  BEGIN
    NULL;
  END;
  OVERRIDING MEMBER PROCEDURE f2
  IS
  BEGIN
    /* refer to deprecated f2 in supertype */
    (SELF AS type15_basetype).f2;
    /* No warning for a reference to a not deprecated data member in the
supertype */
    x1 := 1;
  END;
END;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

References to deprecated entities x, f1, and f0 in unit type15_basetype will cause the compiler to issue a warning.

```
PROCEDURE test_types3
AS
  e type15_subtype ;
  d type15_basetype ;
BEGIN
  e := type15_subtype (1 ,1 ,1);
  d := type15_basetype (1, 1);
  d.x := 2; -- warning issued
  d.f1;     -- warning issued
  e.f1 (4); -- overloaded in derived type. no warning. not deprecated in the
derived type.
  e.f1 (1); -- no warning
  e.f0;     -- f0 is deprecated in base type. deprecation is inherited.
warning issued
            -- warning issued for deprecated x in d.x and e.x

  DBMS_OUTPUT.PUT_LINE(to_char(e.x) || to_char(' ') || to_char(d.x));

END;
```

Example 14-23 Deprecation Only Applies to Top Level Subprogram

This examples shows that the `DEPRECATE` pragma may not be used to deprecate a nested procedure. The compiler issues a warning about the misuse of the pragma on the entity. The pragma has no effect.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Deprecation Only Applies to Top Level Subprogram

```
PROCEDURE foo
IS
   PROCEDURE inner_foo
   IS
   PRAGMA DEPRECATE (inner_foo, 'procedure inner_foo is deprecated');
   BEGIN
     DBMS_OUTPUT.PUT_LINE('Executing inner_foo');
   END;
BEGIN
  DBMS_OUTPUT.PUT_LINE('Executing foo');
END;
```

Example 14-24 Misplaced DEPRECATE Pragma

The `DEPRECATE` pragma must appear immediately after the declaration of the deprecated item. A warning about the misplaced pragma will be issued and the pragma will have no effect.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Misplaced DEPRECATE Pragma

```
PROCEDURE bar
IS
BEGIN
   PRAGMA DEPRECATE(bar);
   DBMS_OUTPUT.PUT_LINE('Executing bar.');
END;
```

Example 14-25 Mismatch of the Element Name and the DEPRECATE Pragma Argument

This example shows that if the argument for the pragma does not match the name in the declaration, the pragma is ignored and the compiler does not issue a warning.

> **Live SQL**
>
> You can view and run this example on Oracle Live SQL at Mismatch of the Element Name and the DEPRECATE Pragma Argument

```
PACKAGE pkg13
AS
  PRAGMA DEPRECATE ('pkg13', 'Package pkg13 is deprecated, use pkg03');
  Y NUMBER;
END pkg13;
```

If an identifier is applied with a mismatched name, then the compiler issues a warning about the pragma being misplaced. The pragma has no effect.

```
CREATE PACKAGE pkg17
IS
  PRAGMA DEPRECATE ("pkg17");
END pkg17;
```

Related Topics

In this book:

- Pragmas
- PL/SQL Units and Compilation Parameters for more information about setting the `PLSQL_WARNINGS` compilation parameter

In other books:

- *Oracle Development Guide* for more information about deprecating packages, subprograms, and types

Copyright © 1996, 2025, Oracle and/or its affiliates.

- *Oracle Database PL/SQL Packages and Types Reference* for more information about enabling the deprecation warnings using the `DBMS_WARNING.ADD_WARNING_SETTING_NUM` procedure
- Compile-Time Warnings for more information compilation warnings.

DETERMINISTIC Clause

The deterministic option marks a function that returns predictable results and has no side effects.

Function-based indexes, virtual column definitions that use PL/SQL functions, and materialized views that have query-rewrite enabled require special function properties. The `DETERMINISTIC` clause asserts that a function has those properties.

The DETERMINISTIC option can appear in the following statements:

- Function Declaration and Definition
- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Usage Notes
- Related Topics

Syntax

***deterministic_clause* ::=**

Semantics

deterministic_clause

DETERMINISTIC

A function is deterministic if the `DETERMINISTIC` clause appears in either a declaration or the definition of the function.

The `DETERMINISTIC` clause may appear at most once in a function declaration and at most once in a function definition.

A deterministic function must return the same value on two distinct invocations if the arguments provided to the two invocations are the same.

A `DETERMINISTIC` function may not have side effects.

A `DETERMINISTIC` function may not raise an unhandled exception.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If a function with a DETERMINISTIC clause violates any of these semantic rules, the results of its invocation, its value, and the effect on its invoker are all undefined.

Usage Notes

The DETERMINISTIC clause is an assertion that the function obeys the semantic rules. If the function does not, neither the compiler, SQL execution, or PL/SQL execution may diagnose the problem and wrong results may be silently produced.

You must specify this keyword if you intend to invoke the function in the expression of a function-based index, in a virtual column definition, or from the query of a materialized view that is marked REFRESH FAST or ENABLE QUERY REWRITE. When the database encounters a deterministic function, it tries to use previously calculated results when possible rather than reexecuting the function. If you change the function, then you must manually rebuild all dependent function-based indexes and materialized views.

Do not specify DETERMINISTIC for a function whose result depends on the state of session variables or schema objects, because results might vary across invocations.

Do not specify this clause to define a function that uses package variables or that accesses the database in any way that might affect the return result of the function.

Specifying this clause for polymorphic table function is not allowed.

When the DETERMINISTIC option appears, the compiler may use the mark to improve the performance of the execution of the function.

It is good programming practice to make functions that fall into these categories DETERMINISTIC:

- Functions used in a WHERE, ORDER BY, or GROUP BY clause
- Functions that MAP or ORDER methods of a SQL type
- Functions that help determine whether or where a row appears in a result set

Related Topics

In other chapters:

- "Subprogram Side Effects"

In other books:

- CREATE INDEX statement in *Oracle Database SQL Language Reference*
- Oracle Database Data Warehousing Guide for information about materialized views
- *Oracle Database SQL Language Reference* for information about function-based indexes

Element Specification

An element specification specifies each attribute of the ADT.

An element specification can appear in the following SQL statements :

- ALTER TYPE Statement
- CREATE TYPE Statement

Topics

- Syntax

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Semantics

Syntax

***element_spec* ::=**

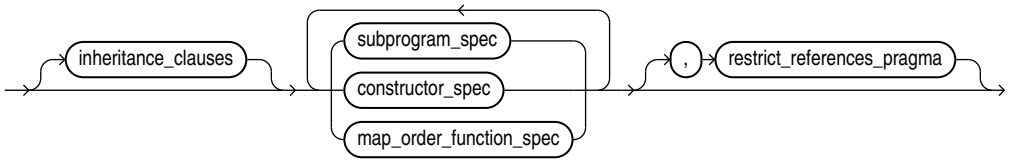

(*subprogram_spec* ::= , *constructor_spec* ::=, *map_order_function_spec* ::=, *restrict_references_pragma* ::=)

***inheritance_clauses* ::=**

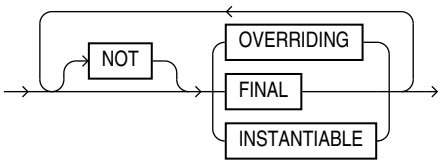

***subprogram_spec* ::=**



(*procedure_spec* ::=, *function_spec* ::=)

***procedure_spec* ::=**

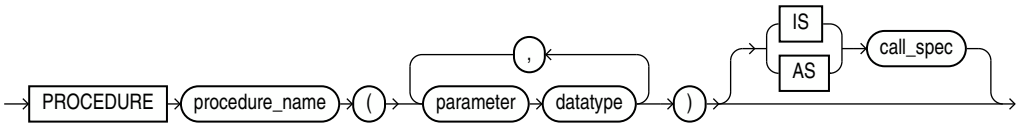

(*call_spec* ::=)

***function_spec* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

***return_clause* ::=**



(*call_spec ::=*)

***constructor_spec* ::=**

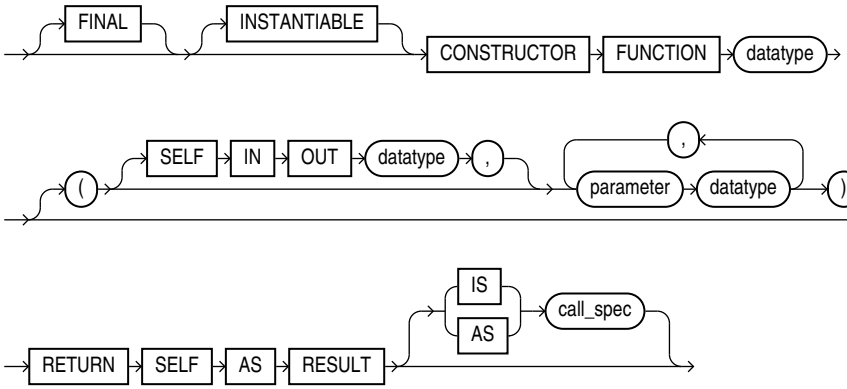

(*call_spec ::=*)

***map_order_function_spec* ::=**



(*function_spec ::=*)

Semantics

element_spec

inheritance_clauses

Specifies the relationship between supertypes and subtypes.

[NOT] OVERRIDING

Specifies that this method overrides a `MEMBER` method defined in the supertype. This keyword is required if the method redefines a supertype method. **Default:** `NOT OVERRIDING`.

[NOT] FINAL

Copyright © 1996, 2025, Oracle and/or its affiliates.

Specifies that this method cannot be overridden by any subtype of this type. **Default:** `NOT FINAL`.

[NOT] INSTANTIABLE

Specifies that the type does not provide an implementation for this method. **Default:** all methods are `INSTANTIABLE`.

Restriction on NOT INSTANTIABLE

If you specify `NOT INSTANTIABLE`, then you cannot specify `FINAL` or `STATIC`.

> **See Also**
>
> *constructor_spec*

subprogram_spec

Specifies a subprogram to be referenced as an ADT attribute. For each such subprogram, you must specify a corresponding method body in the ADT body.

Restriction on *subprogram_spec*

You cannot define a `STATIC` method on a subtype that redefines a `MEMBER` method in its supertype, or vice versa.

MEMBER

A subprogram associated with the ADT that is referenced as an attribute. Typically, you invoke `MEMBER` methods in a selfish style, such as *`object_expression.method`*`()`. This class of method has an implicit first argument referenced as `SELF` in the method body, which represents the object on which the method was invoked.

> **See Also**
>
> "Example 15-35"

STATIC

A subprogram associated with the ADT. Unlike `MEMBER` methods, `STATIC` methods do not have any implicit parameters. You cannot reference `SELF` in their body. They are typically invoked as *`type_name.method`*`()`.

Restrictions on STATIC

- You cannot map a `MEMBER` method in a Java class to a `STATIC` method in a SQLJ object type.
- For both `MEMBER` and `STATIC` methods, you must specify a corresponding method body in the type body for each procedure or function specification.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> "Example 15-36"

procedure_spec* or *function_spec

Specifies the parameters and data types of the procedure or function. If this subprogram does not include the declaration of the procedure or function, then you must issue a corresponding `CREATE TYPE BODY` statement.

Restriction on *procedure_spec* or *function_spec*

If you are creating a subtype, then the name of the procedure or function cannot be the same as the name of any attribute, whether inherited or not, declared in the supertype chain.

return_clause

The first form of the *return_clause* is valid only for a function. The syntax shown is an abbreviated form.

> **See Also**
>
> "Collection Method Invocation" for information about method invocation and methods

constructor_spec

Creates a user-defined constructor, which is a function that returns an initialized instance of an ADT. You can declare multiple constructors for a single ADT, if the parameters of each constructor differ in number, order, or data type.

- User-defined constructor functions are always `FINAL` and `INSTANTIABLE`, so these keywords are optional.
- The parameter-passing mode of user-defined constructors is always `SELF IN OUT`. Therefore you need not specify this clause unless you want to do so for clarity.
- `RETURN SELF AS RESULT` specifies that the runtime type of the value returned by the constructor is runtime type of the `SELF` argument.

> **See Also**
>
> *Oracle Database Object-Relational Developer's Guide* for more information about and examples of user-defined constructors and "Example 15-34"

map_order_function_spec

You can declare either one `MAP` method or one `ORDER` method in a type specification, regardless of how many `MEMBER` or `STATIC` methods you declare. If you declare either method, then you can compare object instances in SQL.

If you do not declare either method, then you can compare object instances only for equality or inequality. Instances of the same type definition are equal only if each pair of their

Copyright © 1996, 2025, Oracle and/or its affiliates.

corresponding attributes is equal. You must not specify a comparison method to determine the equality of two ADTs.

You cannot declare either `MAP` or `ORDER` methods for subtypes. However, a subtype can override a `MAP` method if the supertype defines a `NOT FINAL MAP` method. A subtype cannot override an `ORDER` method at all.

You can specify either `MAP` or `ORDER` when mapping a Java class to a SQL type. However, the `MAP` or `ORDER` methods must map to `MEMBER` functions in the Java class.

If neither a `MAP` nor an `ORDER` method is specified, then only comparisons for equality or inequality can be performed. Therefore object instances cannot be ordered. Instances of the same type definition are equal only if each pair of their corresponding attributes is equal. No comparison method must be specified to determine the equality of two ADTs.

Use `MAP` if you are performing extensive sorting or hash join operations on object instances. `MAP` is applied once to map the objects to scalar values, and then the database uses the scalars during sorting and merging. A `MAP` method is more efficient than an `ORDER` method, which must invoke the method for each object comparison. You must use a `MAP` method for hash joins. You cannot use an `ORDER` method because the hash mechanism hashes on the object value.

See Also

Oracle Database Object-Relational Developer's Guide for more information about object value comparisons

MAP MEMBER

Specifies a `MAP` member function (`MAP` method) that returns the relative position of a given instance in the ordering of all instances of the object. A `MAP` method is called implicitly and induces an ordering of object instances by mapping them to values of a predefined scalar type. PL/SQL uses the ordering to evaluate Boolean expressions and to perform comparisons.

If the argument to the `MAP` method is `NULL`, then the `MAP` method returns `NULL` and the method is not invoked.

An object specification can contain only one `MAP` method, which must be a function. The result type must be a predefined SQL scalar type, and the `MAP` method can have no arguments other than the implicit `SELF` argument.

Note

If *`type_name`* is to be referenced in queries containing sorts (through an `ORDER BY`, `GROUP BY`, `DISTINCT`, or `UNION` clause) or containing joins, and you want those queries to be parallelized, then you must specify a `MAP` member function.

A subtype cannot define a new `MAP` method, but it can override an inherited `MAP` method.

ORDER MEMBER

Specifies an `ORDER` member function (`ORDER` method) that takes an instance of an object as an explicit argument and the implicit `SELF` argument and returns either a negative, zero, or positive

Copyright © 1996, 2025, Oracle and/or its affiliates.

integer. The negative, positive, or zero indicates that the implicit `SELF` argument is less than, equal to, or greater than the explicit argument.

If either argument to the `ORDER` method is `NULL`, then the `ORDER` method returns `NULL` and the method is not invoked.

When instances of the same ADT definition are compared in an `ORDER BY` clause, the `ORDER` method function is invoked.

An object specification can contain only one `ORDER` method, which must be a function having the return type `NUMBER`.

A subtype can neither define nor override an `ORDER` method.

Restriction on *map_order_function_spec*

You cannot add an `ORDER` method to a subtype.

restrict_references_pragma

Deprecated clause, described in "RESTRICT_REFERENCES Pragma".

Restriction on *restrict_references_pragma*

This clause is not valid when dropping a method.

EXCEPTION_INIT Pragma

The `EXCEPTION_INIT` pragma associates a user-defined exception name with an error code.

The `EXCEPTION_INIT` pragma can appear only in the same declarative part as its associated exception, anywhere after the exception declaration.

Topics

- Syntax
- Semantics
- Usage Notes
- Examples
- Related Topics

Syntax

***exception_init_pragma* ::=**



Semantics

exception_init_pragma

exception

Name of a previously declared user-defined exception.

error_code

Copyright © 1996, 2025, Oracle and/or its affiliates.

Error code to be associated with *exception*. *error_code* can be either 100 (the numeric code for "no data found" that "SQLCODE Function" returns) or any negative integer greater than -1000000 except -1403 (another numeric code for "no data found").

> **Note**
>
> NO_DATA_FOUND is a predefined exception.

If two EXCEPTION_INIT pragmas assign different error codes to the same user-defined exception, then the later pragma overrides the earlier pragma.

Usage Notes

The EXCEPTION_INIT pragma should only be used to associate an exception with an error number that is already meaningfully defined by Oracle. Note that any error number may be used by Oracle in the future, which can create conflicts with unrelated application use of that number.

Negative integers greater than -65536 are only partially supported. Currently, if left unhandled beyond the current layer of entry into PL/SQL, the exception is converted to ORA-6515 and the original exception is not recognized in the outer PL/SQL layer or client program.

Application-declared exceptions that are only raised and caught locally within a layer of entry into PL/SQL do not need the EXCEPTION_INIT pragma. The RAISE_APPLICATION_ERROR procedure and associated -20000 to -20999 range of error numbers should be used by application-declared exceptions that are intended to be recognizable in outer PL/SQL layers or in the client program.

Examples

- Example 12-5, "Naming Internally Defined Exception"
- Example 12-13, "Raising User-Defined Exception with RAISE_APPLICATION_ERROR"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"

Related Topics

In this chapter:

- "Exception Declaration"
- "Exception Handler"
- "SQLCODE Function"
- "SQLERRM Function"

In other chapters:

- "Internally Defined Exceptions"
- "RAISE_APPLICATION_ERROR Procedure"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Exception Declaration

An exception declaration declares the name of a user-defined exception.

You can use the `EXCEPTION_INIT` pragma to assign this name to an internally defined exception.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***exception_declaration* ::=**

Semantics

exception_declaration

exception

Name of the exception that you are declaring.

Restriction on *exception*

You can use *`exception`* only in an `EXCEPTION_INIT` pragma, `RAISE` statement, `RAISE_APPLICATION_ERROR` invocation, or exception handler.

> **⚠ Caution**
>
> Oracle recommends against using a predefined exception name for *`exception`*. For details, see "Redeclared Predefined Exceptions". For a list of predefined exception names, see Table 12-3.

Examples

- Example 12-5, "Naming Internally Defined Exception"
- Example 12-9, "Redeclared Predefined Identifier"
- Example 12-10, "Declaring, Raising, and Handling User-Defined Exception"

Related Topics

In this chapter:

- "EXCEPTION_INIT Pragma"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Exception Handler"
- "RAISE Statement"

In other chapters:

- "Internally Defined Exceptions"
- "User-Defined Exceptions"

Exception Handler

An exception handler processes a raised exception.

Exception handlers appear in the exception-handling parts of anonymous blocks, subprograms, triggers, and packages.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***exception_handler* ::=**



(*statement* ::=)

Semantics

exception_handler

exception

Name of either a predefined exception (see Table 12-3) or a user-defined exception (see "Exception Declaration").

If PL/SQL raises a specified exception, then the associated statements run.

OTHERS

Specifies all exceptions not explicitly specified in the exception handling part of the block. If PL/SQL raises such an exception, then the associated statements run.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> Oracle recommends that the last statement in the `OTHERS` exception handler be either `RAISE` or an invocation of a subroutine marked with pragma `SUPPRESSES_WARNING_6009`.
>
> If you do not follow this practice, and PL/SQL warnings are enabled, you get `PLW-06009`.

In the exception handling part of a block, the `WHEN OTHERS` exception handler is optional. It can appear only once, as the last exception handler in the exception handling part of the block.

Examples

- Example 12-3, "Single Exception Handler for Multiple Exceptions"
- Example 12-4, "Locator Variables for Statements that Share Exception Handler"
- Example 12-6, "Anonymous Block Handles ZERO_DIVIDE"
- Example 12-7, "Anonymous Block Avoids ZERO_DIVIDE"
- Example 12-10, "Declaring, Raising, and Handling User-Defined Exception"
- Example 12-14, "Exception that Propagates Beyond Scope is Handled"
- Example 12-24, "Exception Handler Runs and Execution Ends"
- Example 12-25, "Exception Handler Runs and Execution Continues"
- Example 13-12, "Handling FORALL Exceptions Immediately"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"

Related Topics

In this chapter:

- "Block"
- "EXCEPTION_INIT Pragma"
- "Exception Declaration"
- "RAISE Statement"
- "SQLCODE Function"
- "SQLERRM Function"

In other chapters:

- "Overview of Exception Handling"
- "Continuing Execution After Handling Exceptions"
- "Retrying Transactions After Handling Exceptions"
- "CREATE PACKAGE BODY Statement"
- "CREATE TRIGGER Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

EXECUTE IMMEDIATE Statement

The `EXECUTE IMMEDIATE` statement builds and runs a dynamic SQL statement in a single operation.

Native dynamic SQL uses the `EXECUTE IMMEDIATE` statement to process most dynamic SQL statements.

> **⚠ Caution**
>
> When using dynamic SQL, beware of SQL injection, a security risk. For more information about SQL injection, see "SQL Injection".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***execute_immediate_statement* ::=**

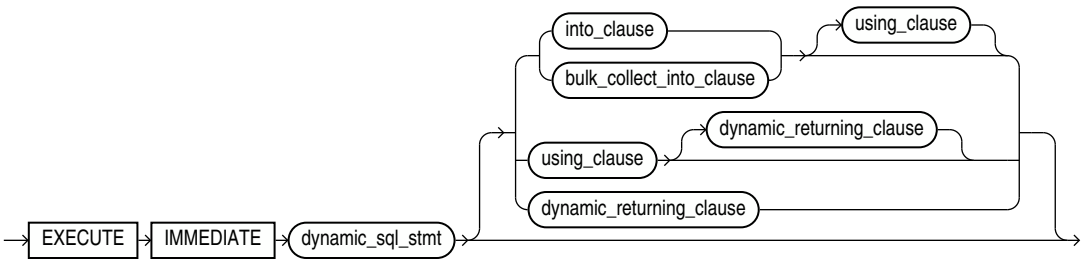

(*bulk_collect_into_clause* ::=, *dynamic_returning_clause* ::=, *into_clause* ::=)

***using_clause* ::=**

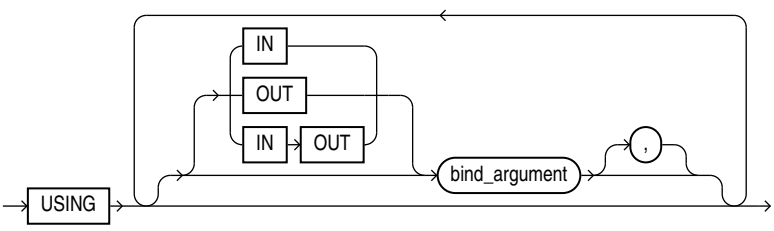

Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

execute_immediate_statement

dynamic_sql_stmt

String literal, string variable, or string expression that represents a SQL statement. Its type must be either `CHAR`, `VARCHAR2`, or `CLOB`.

> **Note**
>
> If *`dynamic_sql_statement`* is a `SELECT` statement, and you omit both *`into_clause`* and *`bulk_collect_into_clause`*, then *`execute_immediate_statement`* never runs.
>
> For example, this statement never increments the sequence:
>
> ```
> EXECUTE IMMEDIATE 'SELECT S.NEXTVAL FROM DUAL'
> ```

into_clause

Specifies the variables or record in which to store the column values that the statement returns. For more information about this clause, see "RETURNING INTO Clause".

Restriction on *into_clause*

Use if and only if *`dynamic_sql_stmt`* returns a single row.

bulk_collect_into_clause

Specifies one or more collections in which to store the rows that the statement returns. For more information about this clause, see "RETURNING INTO Clause".

Restriction on *bulk_collect_into_clause*

Use if and only if *`dynamic_sql_stmt`* can return multiple rows.

dynamic_returning_clause

Returns the column values of the rows affected by the dynamic SQL statement, in either individual variables or records. For more information about this clause, see "RETURNING INTO Clause".

Restriction on *dynamic_returning_clause*

Use if and only if *`dynamic_sql_stmt`* has a `RETURNING INTO` clause.

using_clause

Specifies bind variables, using positional notation.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If you repeat placeholder names in *dynamic_sql_statement*, be aware that the way placeholders are associated with bind variables depends on the kind of dynamic SQL statement. For details, see "Repeated Placeholder Names in Dynamic SQL Statements."

Restrictions on *using_clause*

- Use if and only if *dynamic_sql_stmt* includes placeholders for bind variables.
- If *dynamic_sql_stmt* has a `RETURNING INTO` clause (*static_returning_clause*), then *using_clause* can contain only `IN` bind variables. The bind variables in the `RETURNING INTO` clause are `OUT` bind variables by definition.

IN, OUT, IN OUT

Parameter modes of bind variables. An `IN` bind variable passes its value to *dynamic_sql_stmt*. An `OUT` bind variable stores a value that *dynamic_sql_stmt* returns. An `IN OUT` bind variable passes its initial value to *dynamic_sql_stmt* and stores a value that *dynamic_sql_stmt* returns. **Default:** `IN`.

For DML a statement with a `RETURNING` clause, you can place `OUT` bind variables in the `RETURNING INTO` clause without specifying the parameter mode, which is always `OUT`.

bind_argument

An expression whose value replaces its corresponding placeholder in *dynamic_sql_stmt* at run time.

Every placeholder in *dynamic_sql_stmt* must be associated with a *bind_argument* in the `USING` clause or `RETURNING INTO` clause (or both) or with a define variable in the `INTO` clause.

You can run *dynamic_sql_stmt* repeatedly using different values for the bind variables. You incur some overhead, because `EXECUTE IMMEDIATE` prepares the dynamic string before every execution.

> **Note**
>
> Bind variables can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.

Restrictions on *bind_argument*

- *bind_argument* cannot be an associative array indexed by string.
- *bind_argument* cannot be the reserved word `NULL`.

  To pass the value `NULL` to the dynamic SQL statement, use an uninitialized variable where you want to use `NULL`, as in Example 8-7.

Examples

- Example 8-1, "Invoking Subprogram from Dynamic PL/SQL Block"
- Example 8-7, "Uninitialized Variable Represents NULL in USING Clause"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 8-10, "Repeated Placeholder Names in Dynamic PL/SQL Block"

Related Topics

In this chapter:

- "RETURNING INTO Clause"

In other chapters:

- "EXECUTE IMMEDIATE Statement"
- "DBMS_SQL Package"

EXIT Statement

The `EXIT` statement exits the current iteration of a loop, either conditionally or unconditionally, and transfers control to the end of either the current loop or an enclosing labeled loop.

The `EXIT WHEN` statement exits the current iteration of a loop when the condition in its `WHEN` clause is true, and transfers control to the end of either the current loop or an enclosing labeled loop.

Each time control reaches the `EXIT WHEN` statement, the condition in its `WHEN` clause is evaluated. If the condition is not true, the `EXIT WHEN` statement does nothing. To prevent an infinite loop, a statement inside the loop must make the condition true.

Restriction on EXIT Statement

An `EXIT` statement must be inside a `LOOP` statement.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***exit_statement* ::=**



(*boolean_expression* ::=)

Semantics

exit_statement

label

Name that identifies either the current loop or an enclosing loop.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Without *label*, the EXIT statement transfers control to the end of the current loop. With *label*, the EXIT statement transfers control to the end of the loop that *label* identifies.

WHEN *boolean_expression*

Without this clause, the EXIT statement exits the current iteration of the loop unconditionally. With this clause, the EXIT statement exits the current iteration of the loop if and only if the value of *boolean_expression* is TRUE.

Examples

Example 14-26 Basic LOOP Statement with EXIT Statement

In this example, the EXIT statement inside the basic LOOP statement transfers control unconditionally to the end of the current loop.

```
DECLARE
  x NUMBER := 0;
BEGIN
  LOOP
    DBMS_OUTPUT.PUT_LINE ('Inside loop:  x = ' || TO_CHAR(x));
    x := x + 1;
    IF x > 3 THEN
      EXIT;
    END IF;
  END LOOP;
  -- After EXIT, control resumes here
  DBMS_OUTPUT.PUT_LINE(' After loop:  x = ' || TO_CHAR(x));
END;
/
```

Result:

```
Inside loop:  x = 0
Inside loop:  x = 1
Inside loop:  x = 2
Inside loop:  x = 3
After loop:  x = 4
```

Example 14-27 Basic LOOP Statement with EXIT WHEN Statement

In this example, the EXIT WHEN statement inside the basic LOOP statement transfers control to the end of the current loop when x is greater than 3.

```
DECLARE
  x NUMBER := 0;
BEGIN
  LOOP
    DBMS_OUTPUT.PUT_LINE('Inside loop:  x = ' || TO_CHAR(x));
    x := x + 1;  -- prevents infinite loop
    EXIT WHEN x > 3;
  END LOOP;
  -- After EXIT statement, control resumes here
  DBMS_OUTPUT.PUT_LINE('After loop:  x = ' || TO_CHAR(x));
END;
/
```

Result:

```
Inside loop:  x = 0
Inside loop:  x = 1
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
Inside loop:  x = 2
Inside loop:  x = 3
After loop:  x = 4
```

Related Topics

- "Basic LOOP Statement"
- "CONTINUE Statement"

Explicit Cursor Declaration and Definition

An **explicit cursor** is a named pointer to a private SQL area that stores information for processing a specific query or DML statement—typically, one that returns or affects multiple rows.

You can use an explicit cursor to retrieve the rows of a result set one at a time.

Before using an explicit cursor, you must declare and define it. You can either declare it first (with ***cursor_declaration***) and then define it later in the same block, subprogram, or package (with ***cursor_definition***) or declare and define it at the same time (with ***cursor_definition***).

An explicit cursor declaration and definition are also called a **cursor specification** and **cursor body**, respectively.

> **Note**
>
> An explicit cursor declared in a package specification is affected by the `AUTHID` clause of the package. For more information, see "CREATE PACKAGE Statement".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***cursor_declaration* ::=**

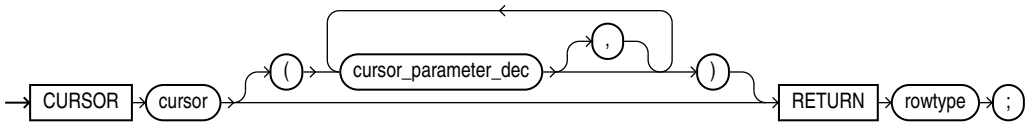

Copyright © 1996, 2025, Oracle and/or its affiliates.

***cursor_definition* ::=**

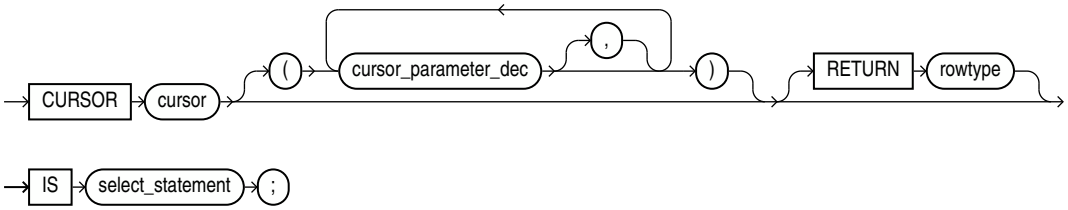

***cursor_parameter_dec* ::=**



***rowtype* ::=**

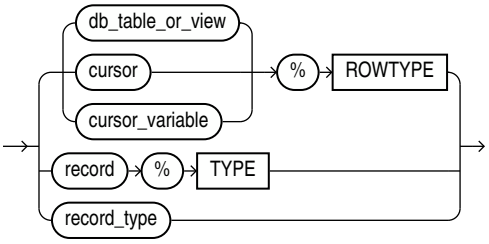

Semantics

cursor_declaration

cursor

Name of the explicit cursor that you are declaring now and will define later in the same block, subprogram, or package. *cursor* can be any identifier except the reserved word SQL. Oracle recommends against giving a cursor the same name as a database table.

Explicit cursor names follow the same scoping rules as variables (see "Scope and Visibility of Identifiers").

cursor_definition

Either defines an explicit cursor that was declared earlier or both declares and defines an explicit cursor.

cursor

Either the name of the explicit cursor that you previously declared and are now defining or the name of the explicit cursor that you are both declaring and defining. *cursor* can be any identifier except the reserved word SQL. Oracle recommends against giving a cursor the same name as a database table.

Copyright © 1996, 2025, Oracle and/or its affiliates.

select_statement

A SQL `SELECT` statement (not a PL/SQL `SELECT INTO` statement). If the cursor has formal parameters, each parameter must appear in *`select_statement`*. The *`select_statement`* can also reference other PL/SQL variables in its scope.

Restriction on *select_statement*

This *`select_statement`* cannot have a `WITH` clause.

> **See**
>
> *Oracle Database SQL Language Reference* for `SELECT` statement syntax

cursor_parameter_dec

A cursor parameter declaration.

parameter

The name of the formal cursor parameter that you are declaring. This name can appear anywhere in *`select_statement`* that a constant can appear.

IN

Whether or not you specify `IN`, a formal cursor parameter has the characteristics of an `IN` subprogram parameter, which are summarized in Table 9-1. When the cursor opens, the value of the formal parameter is that of either its actual parameter or default value.

datatype

The data type of the parameter.

Restriction on *datatype*

This *`datatype`* cannot have constraints (for example, `NOT NULL`, or precision and scale for a number, or length for a string).

expression

Specifies the default value for the formal cursor parameter. The data types of *`expression`* and the formal cursor parameter must be compatible.

If an `OPEN` statement does not specify an actual parameter for the formal cursor parameter, then the statement evaluates *`expression`* and assigns its value to the formal cursor parameter.

If an `OPEN` statement does specify an actual parameter for the formal cursor parameter, then the statement assigns the value of the actual parameter to the formal cursor parameter and does not evaluate *`expression`*.

rowtype

Data type of the row that the cursor returns. The columns of this row must match the columns of the row that *`select_statement`* returns.

db_table_or_view

Name of a database table or view, which must be accessible when the declaration is elaborated.

Copyright © 1996, 2025, Oracle and/or its affiliates.

cursor

Name of a previously declared explicit cursor.

cursor_variable

Name of a previously declared cursor variable.

record

Name of a previously declared record variable.

record_type

Name of a user-defined type that was defined with the data type specifier `RECORD`.

Examples

- Example 7-5, "Explicit Cursor Declaration and Definition"
- Example 7-8, "Variable in Explicit Cursor Query—No Result Set Change"
- Example 7-9, "Variable in Explicit Cursor Query—Result Set Change"
- Example 7-10, "Explicit Cursor with Virtual Column that Needs Alias"
- Example 7-11, "Explicit Cursor that Accepts Parameters"
- Example 7-12, "Cursor Parameters with Default Values"
- Example 7-13, "Adding Formal Parameter to Existing Cursor"
- Example 7-22, "Subquery in FROM Clause of Parent Query"
- Example 7-23, "Correlated Subquery"
- Example 7-35, "CURSOR Expression"
- Example 7-41, "FETCH with FOR UPDATE Cursor After COMMIT Statement"

Related Topics

In this chapter:

- "CLOSE Statement"
- "Cursor FOR LOOP Statement"
- "Cursor Variable Declaration"
- "FETCH Statement"
- "Named Cursor Attribute"
- "OPEN Statement"
- "%ROWTYPE Attribute"
- "%TYPE Attribute"

In other chapters:

- "Explicit Cursors"
- "Processing Query Result Sets"
- "SELECT FOR UPDATE and FOR UPDATE Cursors"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Expression

An expression is an arbitrarily complex combination of operands (variables, constants, literals, operators, function invocations, and placeholders) and operators.

The simplest expression is a single variable.

The PL/SQL compiler determines the data type of an expression from the types of the operands and operators that comprise the expression. Every time the expression is evaluated, a single value of that type results.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***expression* ::=**

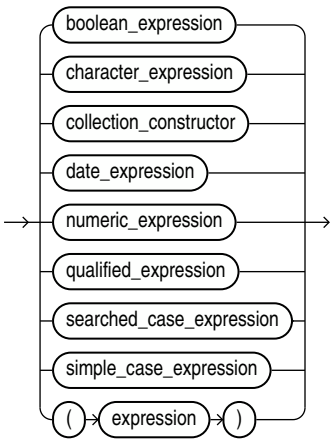

(*boolean_expression* ::=, *character_expression* ::=, *collection_constructor* ::=, *date_expression* ::=, *numeric_expression* ::=, *qualified_expression* ::= , *searched_case_expression* ::=, *simple_case_expression* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***boolean_expression* ::=**

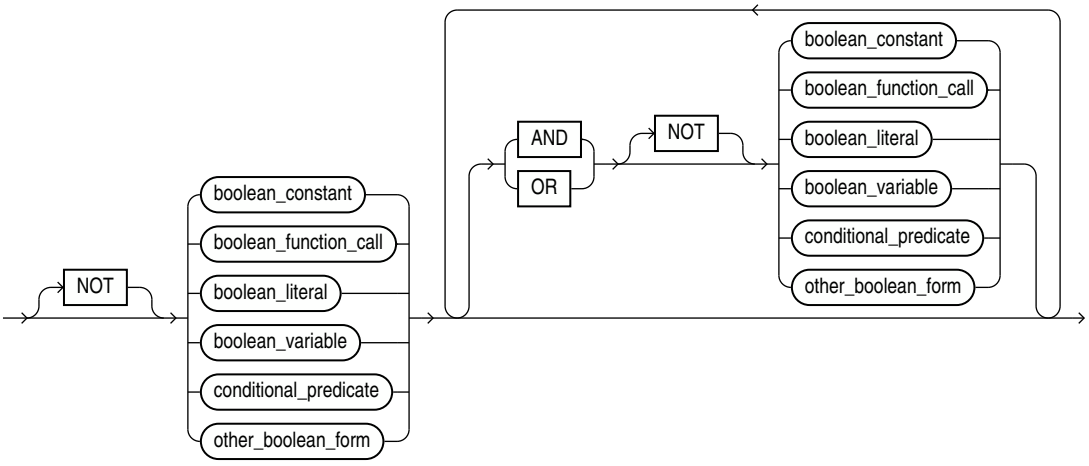

(*function_call* ::=)

***boolean_literal* ::=**



***conditional_predicate* ::=**

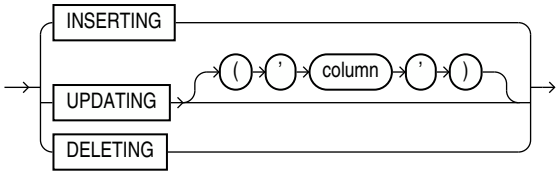

Copyright © 1996, 2025, Oracle and/or its affiliates.

***other_boolean_form* ::=**

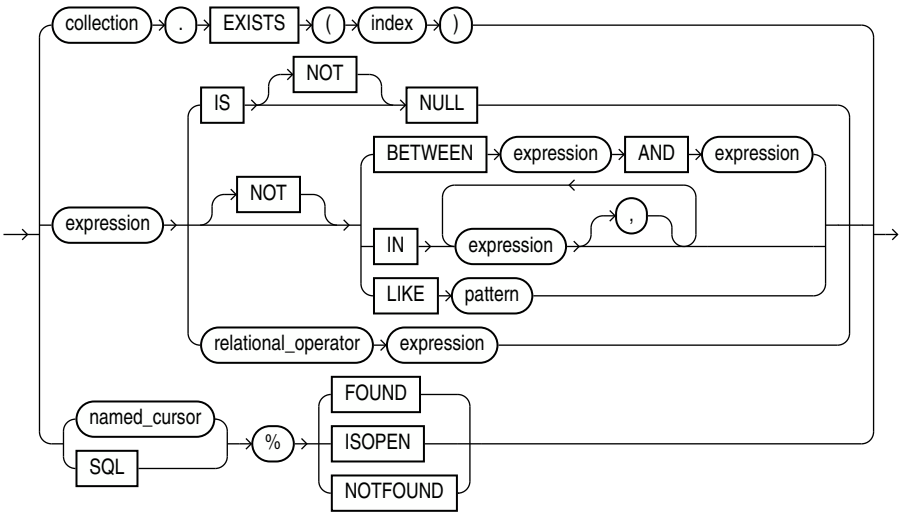

(*expression ::=*, *named_cursor ::=*)

***character_expression* ::=**

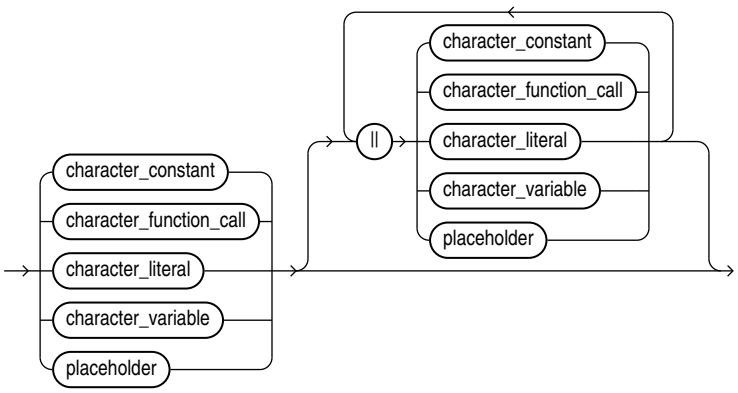

(*function_call ::=*, *placeholder ::=*)

***collection_constructor* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

***date_expression* ::=**

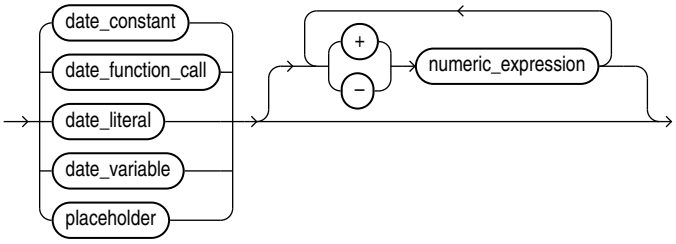

(*function_call* ::=, *placeholder* ::=)

***numeric_expression* ::=**

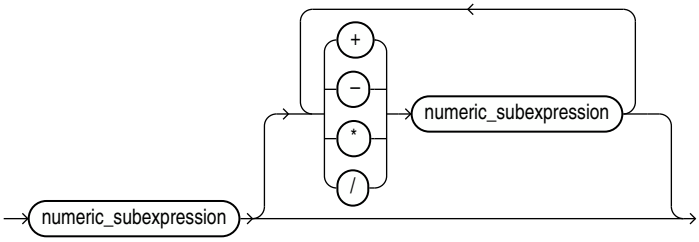

***numeric_subexpression* ::=**

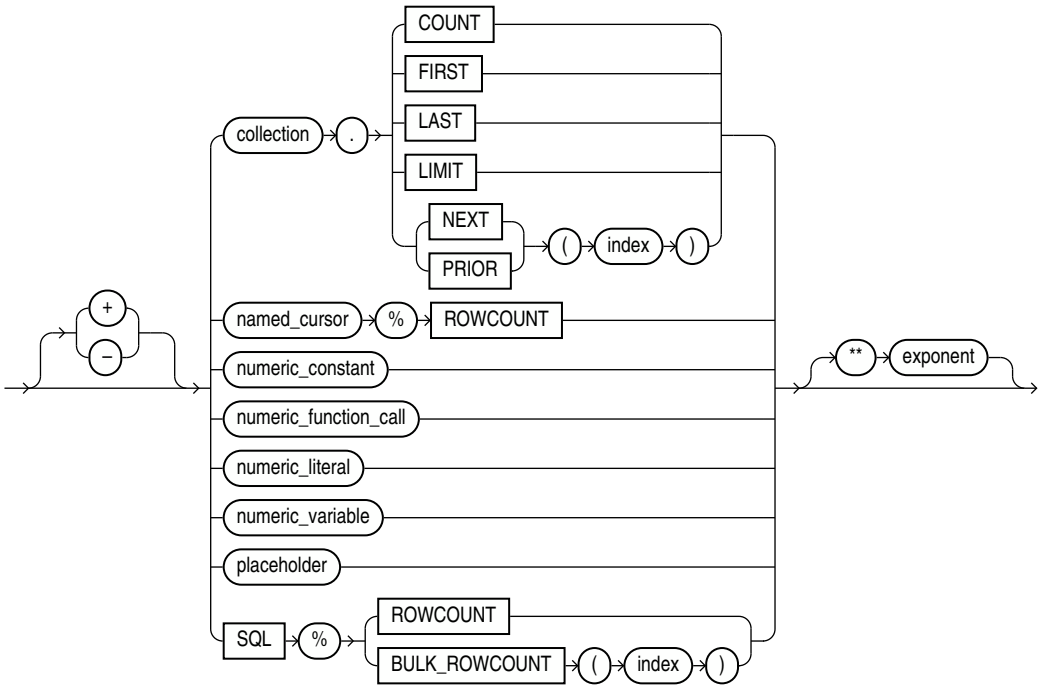

(*function_call* ::=, *named_cursor* ::=, *placeholder* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***function_call* ::=**

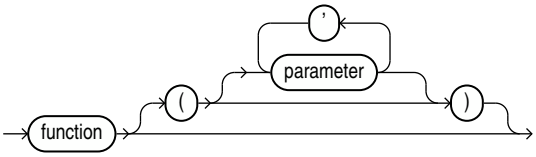

***searched_case_expression* ::=**



(*boolean_expression ::=*)

***simple_case_expression* ::=**

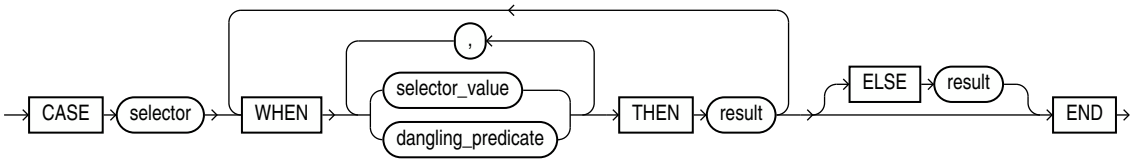

Semantics

boolean_expression

Expression whose value is `TRUE`, `FALSE`, or `NULL`. For more information, see "BOOLEAN Expressions".

NOT, AND, OR

See "Logical Operators".

boolean_constant

Name of a constant of type `BOOLEAN`.

boolean_function_call

Invocation of a previously defined function that returns a `BOOLEAN` value. For more semantic information, see "*function_call*".

boolean_variable

Name of a variable of type `BOOLEAN`.

conditional_predicate

See "Conditional Predicates for Detecting Triggering DML Statement".

Copyright © 1996, 2025, Oracle and/or its affiliates.

other_boolean_form

collection

Name of a collection variable.

EXISTS

Collection method (function) that returns `TRUE` if the *`index`*th element of *`collection`* exists and `FALSE` otherwise. For more information, see "EXISTS Collection Method".

Restriction on EXISTS

You cannot use `EXISTS` if *`collection`* is an associative array.

index

Numeric expression whose data type either is `PLS_INTEGER` or can be implicitly converted to `PLS_INTEGER` (for information about the latter, see "Predefined PLS_INTEGER Subtypes").

IS [NOT] NULL

See "IS [NOT] NULL Operator".

BETWEEN *expression* AND *expression*

See "BETWEEN Operator".

IN *expression* [, *expression*]...

See "IN Operator".

LIKE *pattern*

See "LIKE Operator".

relational_operator

See "Relational Operators".

SQL

Implicit cursor associated with the most recently run `SELECT` or DML statement. For more information, see "Implicit Cursors".

%FOUND, %ISOPEN, %NOTFOUND

Cursor attributes explained in "Implicit Cursor Attribute" and "Named Cursor Attribute".

character_expression

Expression whose value has a character data type (that is, a data type in the `CHAR` family, described in "CHAR Data Type Family").

character_constant

Name of a constant that has a character data type.

character_function_call

Invocation of a previously defined function that returns a value that either has a character data type or can be implicitly converted to a character data type. For more semantic information, see "*function_call*".

Copyright © 1996, 2025, Oracle and/or its affiliates.

character_literal

Literal of a character data type.

character_variable

Name of a variable that has a character data type.

||

Concatenation operator, which appends one string operand to another. For more information, see "Concatenation Operator".

collection_constructor

Constructs a collection of the specified type with elements that have the specified values.

For more information, see "Collection Constructors".

collection_type

Name of a previously declared nested table type or `VARRAY` type (not an associative array type).

value

Valid value for an element of a collection of *`collection_type`*.

If *`collection_type`* is a varray type, then it has a maximum size, which the number of values cannot exceed. If *`collection_type`* is a nested table type, then it has no maximum size.

If you specify no values, then the constructed collection is empty but not null (for the difference between *empty* and *null*, see "Collection Types").

date_expression

Expression whose value has a date data type (that is, a data type in the `DATE` family, described in "DATE Data Type Family").

date_constant

Name of a constant that has a date data type.

date_function_call

Invocation of a previously defined function that returns a value that either has a date data type or can be implicitly converted to a date data type. For more semantic information, see "*function_call*".

date_literal

Literal whose value either has a date data type or can be implicitly converted to a date data type.

date_variable

Name of a variable that has a date data type.

+, -

Addition and subtraction operators.

Copyright © 1996, 2025, Oracle and/or its affiliates.

numeric_expression

Expression whose value has a date numeric type (that is, a data type in the `DATE` family, described in "NUMBER Data Type Family").

+, -, /, *, **

Addition, subtraction, division, multiplication, and exponentiation operators.

numeric_subexpression

collection

Name of a collection variable.

COUNT, FIRST, LAST, LIMIT, NEXT, PRIOR

Collection methods explained in "Collection Method Invocation".

***named_cursor*%ROWCOUNT**

See "Named Cursor Attribute".

numeric_constant

Name of a constant that has a numeric data type.

numeric_function_call

Invocation of a previously defined function that returns a value that either has a numeric data type or can be implicitly converted to a numeric data type. For more semantic information, see "*function_call*".

numeric_literal

Literal of a numeric data type.

numeric_variable

Name of variable that has a numeric data type.

SQL%ROWCOUNT

Cursor attribute explained in "Implicit Cursor Attribute".

SQL%BULK_ROWCOUNT]

Cursor attribute explained in "SQL%BULK_ROWCOUNT".

exponent

Numeric expression.

function_call

function

Name of a previously defined function.

***parameter* [, *parameter*]...**

List of actual parameters for the function being called. The data type of each actual parameter must be compatible with the data type of the corresponding formal parameter. The mode of the formal parameter determines what the actual parameter can be:

Copyright © 1996, 2025, Oracle and/or its affiliates.

Formal Parameter Mode	Actual Parameter
`IN`	Constant, initialized variable, literal, or expression
`OUT`	Variable whose data type is not defined as `NOT NULL`
`IN OUT`	Variable (typically, it is a string buffer or numeric accumulator)

If the function specifies a default value for a parameter, you can omit that parameter from the parameter list. If the function has no parameters, or specifies a default value for every parameter, you can either omit the parameter list or specify an empty parameter list.

> **See Also**
>
> "Positional, Named, and Mixed Notation for Actual Parameters"

searched_case_expression

WHEN *boolean_expression* THEN *result*

The *`boolean_expression`*s are evaluated sequentially. If a *`boolean_expression`* has the value `TRUE`, then the *`result`* associated with that *`boolean_expression`* is returned. Subsequent *`boolean_expression`*s are not evaluated.

ELSE *result*

The *`result`* is returned if and only if no *`boolean_expression`* has the value `TRUE`.

If you omit the `ELSE` clause, the searched case expression returns `NULL`.

> **See Also**
>
> "Searched CASE Statement"

simple_case_expression

selector

An expression of any PL/SQL type except `BLOB`, `BFILE`, or a user-defined type. The *`selector`* is evaluated once.

WHEN *selector_value* THEN *result*

The *`selector_values`* are evaluated sequentially. If a *`selector_value`* matches the value of *`selector`*, then the *`result`* associated with that *`selector_value`* is returned. Subsequent *`selector_values`* are not evaluated.

A *`selector_value`* can be of any PL/SQL type except `BLOB`, `BFILE`, an ADT, a PL/SQL record, an associative array, a varray, or a nested table.

ELSE *result*

The *`result`* is returned if and only if no *`selector_value`* has the same value as *`selector`*.

If you omit the `ELSE` clause, the simple case expression returns `NULL`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If you specify the literal `NULL` for every *`result`* (including the *`result`* in the `ELSE` clause), then error PLS-00617 occurs.

> **See Also**
>
> "Simple CASE Statement"

Examples

- Example 3-28, "Concatenation Operator Examples"
- Example 3-30, "Controlling Evaluation Order with Parentheses"
- Example 3-31, "Expression with Nested Parentheses"
- Example 3-32, "Improving Readability with Parentheses"
- Example 3-33, "Operator Precedence"
- Example 3-43, "Relational Operators in Expressions"
- Example 3-44, "LIKE Operator in Expression"
- Example 3-46, "BETWEEN Operator in Expressions"
- Example 3-47, "IN Operator in Expressions"
- Example 3-50, "Simple CASE Expression"
- Example 3-54, "Searched CASE Expression"
- Example 10-1, "Trigger Uses Conditional Predicates to Detect Triggering Statement"

Related Topics

In this chapter:

- "Collection Method Invocation"
- "Constant Declaration"
- Qualified Expression
- "Scalar Variable Declaration"

In other chapters:

- "Qualified Expressions Overview" for more information and examples
- "Literals"
- "Expressions"
- "Operator Precedence"
- "PL/SQL Data Types"
- "Subprogram Parameters"

Copyright © 1996, 2025, Oracle and/or its affiliates.

FETCH Statement

The `FETCH` statement retrieves rows of data from the result set of a multiple-row query—one row at a time, several rows at a time, or all rows at once—and stores the data in variables, records, or collections.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***fetch_statement* ::=**

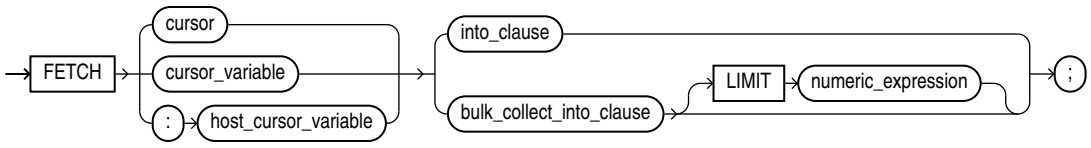

(*bulk_collect_into_clause* ::=, *into_clause* ::=, *numeric_expression* ::=)

Semantics

fetch_statement

cursor

Name of an open explicit cursor. To open an explicit cursor, use the "OPEN Statement".

If you try to fetch from an explicit cursor before opening it or after closing it, PL/SQL raises the predefined exception `INVALID_CURSOR`.

cursor_variable

Name of an open cursor variable. To open a cursor variable, use the "OPEN FOR Statement". The cursor variable can be a formal subprogram parameter (see "Cursor Variables as Subprogram Parameters").

If you try to fetch from a cursor variable before opening it or after closing it, PL/SQL raises the predefined exception `INVALID_CURSOR`.

:host_cursor_variable

Name of a cursor variable declared in a PL/SQL host environment, passed to PL/SQL as a bind variable, and then opened. To open a host cursor variable, use the "OPEN FOR Statement". Do not put space between the colon (:) and *`host_cursor_variable`*.

The data type of a host cursor variable is compatible with the return type of any PL/SQL cursor variable.

Copyright © 1996, 2025, Oracle and/or its affiliates.

into_clause

To have the `FETCH` statement retrieve one row at a time, use this clause to specify the variables or record in which to store the column values of a row that the cursor returns. For more information about *`into_clause`*, see "*into_clause ::=*".

***bulk_collect_into_clause* [LIMIT *numeric_expression*]**

Use *`bulk_collect_into_clause`* to specify one or more collections in which to store the rows that the `FETCH` statement returns. For more information about *`bulk_collect_into_clause`*, see "*bulk_collect_into_clause ::=*".

To have the `FETCH` statement retrieve all rows at once, omit `LIMIT` *`numeric_expression`*.

To limit the number of rows that the `FETCH` statement retrieves at once, specify `LIMIT` *`numeric_expression`*.

Restrictions on *bulk_collect_into_clause*

- You cannot use *`bulk_collect_into_clause`* in client programs.
- When the `FETCH` statement requires implicit data type conversions, *`bulk_collect_into_clause`* can have only one *`collection`* or *`host_array`*.

Examples

- Example 6-57, "FETCH Assigns Values to Record that Function Returns"
- Example 7-6, "FETCH Statements Inside LOOP Statements"
- Example 7-7, "Fetching Same Explicit Cursor into Different Variables"
- Example 7-26, "Fetching Data with Cursor Variables"
- Example 7-27, "Fetching from Cursor Variable into Collections"
- Example 7-41, " FETCH with FOR UPDATE Cursor After COMMIT Statement"
- Example 8-8, "Native Dynamic SQL with OPEN FOR, FETCH, and CLOSE Statements"
- Example 13-22, "Bulk-Fetching into Two Nested Tables"
- Example 13-23, "Bulk-Fetching into Nested Table of Records"
- Example 13-24, "Limiting Bulk FETCH with LIMIT"

Related Topics

In this chapter:

- "Assignment Statement"
- "CLOSE Statement"
- "Cursor Variable Declaration"
- "Explicit Cursor Declaration and Definition"
- "OPEN Statement"
- "OPEN FOR Statement"
- "RETURNING INTO Clause"
- "%ROWTYPE Attribute"
- "SELECT INTO Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "%TYPE Attribute"

In other chapters:

- "Using FETCH to Assign a Row to a Record Variable"
- "Fetching Data with Explicit Cursors"
- "Processing Query Result Sets With Cursor FOR LOOP Statements"
- "Fetching Data with Cursor Variables"
- "OPEN FOR, FETCH, and CLOSE Statements"
- "FETCH Statement with BULK COLLECT Clause"
- "Fetching from Results of Pipelined Table Functions"

FOR LOOP Statement

With each iteration of the `FOR LOOP` statement, its statements run, its index is either incremented or decremented, and control returns to the top of the loop.

The `FOR LOOP` statement ends when its index reaches a specified value, or when a statement inside the loop transfers control outside the loop or raises an exception. An index is also called an iterand. Statements outside the loop cannot reference the iterand. After the `FOR LOOP` statement runs, the iterand is undefined.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***for_loop_statement* ::=**





(Iterator, *statement* ::=)

Semantics

for_loop_statement

iterator

See *iterator*

statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

An EXIT, EXIT WHEN, CONTINUE, or CONTINUE WHEN in the *statements* can cause the loop or the current iteration of the loop to end early. See "*statement ::=*" for the list of all possible statements.

label

A label that identifies *for_loop_statement* (see "*label*"). CONTINUE, EXIT, and GOTO statements can reference this label.

Labels improve readability, especially when LOOP statements are nested, but only if you ensure that the label in the END LOOP statement matches a label at the beginning of the same LOOP statement (the compiler does not check).

Examples

- Example 5-20, "Simple Step Filter Using FOR LOOP Stepped Range Iterator"
- Example 5-16, "FOR LOOP Statement Range Iteration Control"
- Example 5-17, "Reverse FOR LOOP Statement Range Iteration Control"
- Example 5-28, "Using FOR LOOP Stopping Predicate Clause"
- Example 5-29, "Using FOR LOOP Skipping Predicate Clause"
- Example 5-11, "Outside Statement References FOR LOOP Statement Index"
- Example 5-12, "FOR LOOP Statement Index with Same Name as Variable"
- Example 5-13, "FOR LOOP Statement References Variable with Same Name as Index"
- Example 5-14, "Nested FOR LOOP Statements with Same Index Name"

Example 14-28 EXIT WHEN Statement in FOR LOOP Statement

Suppose that you must exit a FOR LOOP statement immediately if a certain condition arises. You can put the condition in an EXIT WHEN statement inside the FOR LOOP statement.

In this example, the FOR LOOP statement is processed 10 times unless the FETCH statement inside it fails to return a row, in which case it ends immediately.

```
DECLARE
  v_employees employees%ROWTYPE;
  CURSOR c1 is SELECT * FROM employees;
BEGIN
  OPEN c1;
  -- Fetch entire row into v_employees record:
  FOR i IN 1..10 LOOP
    FETCH c1 INTO v_employees;
    EXIT WHEN c1%NOTFOUND;
    -- Process data here
  END LOOP;
  CLOSE c1;
END;
/
```

Example 14-29 EXIT WHEN Statement in Inner FOR LOOP Statement

Now suppose that the FOR LOOP statement that you must exit early is nested inside another FOR LOOP statement. If, when you exit the inner loop early, you also want to exit the outer loop, then label the outer loop and specify its name in the EXIT WHEN statement.

```
DECLARE
  v_employees employees%ROWTYPE;
  CURSOR c1 is SELECT * FROM employees;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
BEGIN
  OPEN c1;

  -- Fetch entire row into v_employees record:
  <<outer_loop>>
  FOR i IN 1..10 LOOP
    -- Process data here
    FOR j IN 1..10 LOOP
      FETCH c1 INTO v_employees;
      EXIT outer_loop WHEN c1%NOTFOUND;
      -- Process data here
    END LOOP;
  END LOOP outer_loop;

  CLOSE c1;
END;
/
```

Example 14-30 CONTINUE WHEN Statement in Inner FOR LOOP Statement

If you want to exit the inner loop early but complete the current iteration of the outer loop, then label the outer loop and specify its name in the `CONTINUE WHEN` statement.

```
DECLARE
  v_employees employees%ROWTYPE;
  CURSOR c1 is SELECT * FROM employees;
BEGIN
  OPEN c1;

  -- Fetch entire row into v_employees record:
  <<outer_loop>>
  FOR i IN 1..10 LOOP
    -- Process data here
    FOR j IN 1..10 LOOP
      FETCH c1 INTO v_employees;
      CONTINUE outer_loop WHEN c1%NOTFOUND;
      -- Process data here
    END LOOP;
  END LOOP outer_loop;

  CLOSE c1;
END;
/
```

Related Topics

- "FOR LOOP Iterand"
- "FOR LOOP Statement Overview" for more conceptual information
- "Basic LOOP Statement"
- "CONTINUE Statement"
- "Cursor FOR LOOP Statement"
- "EXIT Statement"
- "FETCH Statement"
- "FORALL Statement"
- "OPEN Statement"
- "WHILE LOOP Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Overview of Exception Handling" for information about exceptions, which can also cause a loop to end immediately if a certain condition arises

FORALL Statement

The `FORALL` statement runs one DML statement multiple times, with different values in the `VALUES` and `WHERE` clauses.

The different values come from existing, populated collections or host arrays. The `FORALL` statement is usually much faster than an equivalent `FOR LOOP` statement.

> **Note**
>
> You can use the `FORALL` statement only in server programs, not in client programs.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***forall_statement* ::=**



***bounds_clause* ::=**

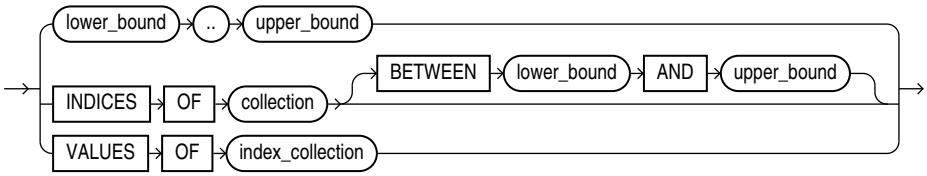

Semantics

forall_statement

index

Name for the implicitly declared integer variable that is local to the `FORALL` statement. Statements outside the `FORALL` statement cannot reference *`index`*. Statements inside the `FORALL` statement can reference *`index`* as an index variable, but cannot use it in expressions or change its value. After the `FORALL` statement runs, *`index`* is undefined.

dml_statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

A static or dynamic INSERT, UPDATE, DELETE, or MERGE statement that references at least one collection in its VALUES or WHERE clause. Performance benefits apply only to collection references that use *index* as an index.

Every collection that *dml_statement* references must have indexes that match the values of *index*. If you apply the DELETE, EXTEND, or TRIM method to one collection, apply it to the other collections also, so that all collections have the same set of indexes. If any collection lacks a referenced element, PL/SQL raises an exception.

Restriction on *dml_statement*

If *dml_statement* is a dynamic SQL statement, then values in the USING clause (bind variables for the dynamic SQL statement) must be simple references to the collection, not expressions. For example, *collection*(*i*) is valid, but UPPER(*collection*(*i*)) is invalid.

SAVE EXCEPTIONS

Lets the FORALL statement continue even if some of its DML statements fail. For more information, see "Handling FORALL Exceptions After FORALL Statement Completes".

bounds_clause

Specifies the collection element indexes that provide values for the variable *index*. For each value, the SQL engine runs *dml_statement* once.

lower_bound .. upper_bound

Both *lower_bound* and *upper_bound* are numeric expressions that PL/SQL evaluates once, when the FORALL statement is entered, and rounds to the nearest integer if necessary. The resulting integers must be the lower and upper bounds of a valid range of consecutive index numbers. If an element in the range is missing or was deleted, PL/SQL raises an exception.

INDICES OF *collection* [BETWEEN *lower_bound* AND *upper_bound*]

Specifies that the values of *index* correspond to the indexes of the elements of *collection*. The indexes need not be consecutive.

Both *lower_bound* and *upper_bound* are numeric expressions that PL/SQL evaluates once, when the FORALL statement is entered, and rounds to the nearest integer if necessary. The resulting integers are the lower and upper bounds of a valid range of index numbers, which need not be consecutive.

Restriction on *collection*

If *collection* is an associative array, it must be indexed by PLS_INTEGER.

VALUES OF *index_collection*

Specifies that the values of *index* are the elements of *index_collection*, a collection of PLS_INTEGER elements that is indexed by PLS_INTEGER. The indexes of *index_collection* need not be consecutive. If *index_collection* is empty, PL/SQL raises an exception and the FORALL statement does not run.

Examples

- Example 13-8, "DELETE Statement in FORALL Statement"
- Example 13-9, "Time Difference for INSERT Statement in FOR LOOP and FORALL Statements"
- Example 13-10, "FORALL Statement for Subset of Collection"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 13-11, "FORALL Statements for Sparse Collection and Its Subsets"
- Example 13-12, "Handling FORALL Exceptions Immediately"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"
- Example 13-27, "DELETE with RETURN BULK COLLECT INTO in FORALL Statement"
- Example 13-29, "Anonymous Block Bulk-Binds Input Host Array"

Related Topics

In this chapter:

- "FOR LOOP Statement"
- "Implicit Cursor Attribute"

In other chapters:

- "FORALL Statement"
- "BULK COLLECT Clause"
- "Using FORALL Statement and BULK COLLECT Clause Together"

Formal Parameter Declaration

A formal parameter declaration specifies the name and data type of the parameter, and (optionally) its mode and default value.

A formal parameter declaration can appear in the following:

- "Function Declaration and Definition"
- "Procedure Declaration and Definition"
- "CREATE FUNCTION Statement"
- "CREATE PROCEDURE Statement"

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***parameter_declaration* ::=**

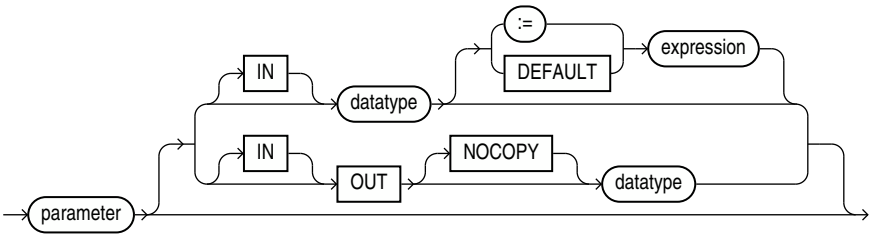

Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

parameter_declaration

parameter

Name of the formal parameter that you are declaring, which you can reference in the executable part of the subprogram.

IN, OUT, IN OUT

Mode that determines the behavior of the parameter, explained in "Subprogram Parameter Modes". **Default:** `IN`.

> **Note**
>
> Avoid using `OUT` and `IN OUT` for function parameters. The purpose of a function is to take zero or more parameters and return a single value. Functions must be free from side effects, which change the values of variables not local to the subprogram.

NOCOPY

Requests that the compiler pass the corresponding actual parameter by reference instead of value (for the difference, see "Subprogram Parameter Passing Methods"). Each time the subprogram is invoked, the optimizer decides, silently, whether to obey or disregard `NOCOPY`.

> **Caution**
>
> `NOCOPY` increases the likelihood of aliasing. For details, see "Subprogram Parameter Aliasing with Parameters Passed by Reference".

The compiler ignores `NOCOPY` in these cases:

- The actual parameter must be implicitly converted to the data type of the formal parameter.
- The actual parameter is the element of a collection.
- The actual parameter is a scalar variable with the `NOT NULL` constraint.
- The actual parameter is a scalar numeric variable with a range, size, scale, or precision constraint.
- The actual and formal parameters are records, one or both was declared with `%ROWTYPE` or `%TYPE`, and constraints on corresponding fields differ.
- The actual and formal parameters are records, the actual parameter was declared (implicitly) as the index of a cursor `FOR LOOP` statement, and constraints on corresponding fields differ.
- The subprogram is invoked through a database link or as an external subprogram.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The preceding list might change in a subsequent release.

datatype

Data type of the formal parameter that you are declaring. The data type can be a constrained subtype, but cannot include a constraint (for example, `NUMBER(2)` or `VARCHAR2(20)`).

If *`datatype`* is a constrained subtype, the corresponding actual parameter inherits the `NOT NULL` constraint of the subtype (if it has one), but not the size (see Example 9-10).

> **Caution**
>
> The data type `REF CURSOR` increases the likelihood of subprogram parameter aliasing, which can have unintended results. For more information, see "Subprogram Parameter Aliasing with Cursor Variable Parameters".

expression

Default value of the formal parameter that you are declaring. The data type of *`expression`* must be compatible with *`datatype`*.

If a subprogram invocation does not specify an actual parameter for the formal parameter, then that invocation evaluates *`expression`* and assigns its value to the formal parameter.

If a subprogram invocation does specify an actual parameter for the formal parameter, then that invocation assigns the value of the actual parameter to the formal parameter and does not evaluate *`expression`*.

Examples

- Example 3-26, "Assigning Value to Variable as IN OUT Subprogram Parameter"
- Example 9-9, "Formal Parameters and Actual Parameters"
- Example 9-14, "Parameter Values Before, During, and After Procedure Invocation"
- Example 9-15, "OUT and IN OUT Parameter Values After Exception Handling"
- Example 9-20, "Procedure with Default Parameter Values"
- Example 9-21, "Function Provides Default Parameter Value"
- Example 9-22, "Adding Subprogram Parameter Without Changing Existing Invocations"

Related Topics

In this chapter:

- "Function Declaration and Definition"
- "Procedure Declaration and Definition"

In other chapters:

- "Subprogram Parameters"
- "Tune Subprogram Invocations"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "CREATE FUNCTION Statement"
- "CREATE PROCEDURE Statement"

Function Declaration and Definition

Before invoking a function, you must declare and define it. You can either declare it first (with ***function_declaration***) and then define it later in the same block, subprogram, or package (with ***function_definition***) or declare and define it at the same time (with ***function_definition***).

A **function** is a subprogram that returns a value. The data type of the value is the data type of the function. A function invocation (or call) is an expression, whose data type is that of the function.

A function declaration is also called a **function specification** or **function spec**.

> **Note**
>
> This topic applies to nested functions.
>
> For information about standalone functions, see "CREATE FUNCTION Statement".
>
> For information about package functions, see "CREATE PACKAGE Statement".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

function_declaration **::=**

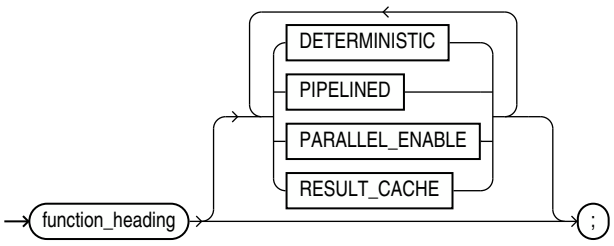

function_heading **::=**

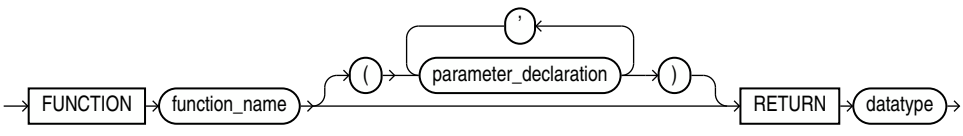

Copyright © 1996, 2025, Oracle and/or its affiliates.

(*datatype* ::= , *parameter_declaration* ::=)

***function_definition* ::=**

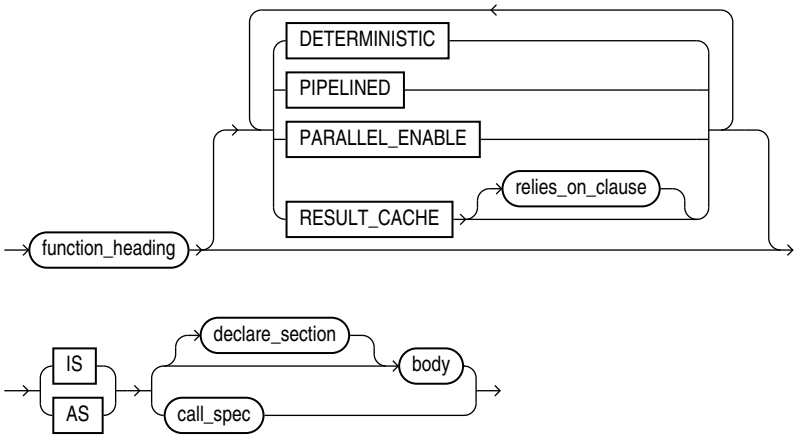

(*body* ::= , *declare_section* ::= , *pipelined_clause* ::= , *deterministic_clause* ::= , *parallel_enable_clause* ::= , *result_cache_clause* ::= , *call_spec* ::=)

Semantics

function_declaration

Declares a function, but does not define it. The definition must appear later in the same block, subprogram, or package as the declaration.

function_heading

The function heading specifies the function name and its parameter list.

function_name

Name of the function that you are declaring or defining.

RETURN *datatype*

Specifies the data type of the value that the function returns, which can be any PL/SQL data type (see PL/SQL Data Types).

Restriction on *datatype*

You cannot constrain this data type (with `NOT NULL`, for example). If *`datatype`* is a constrained subtype, then the returned value does not inherit the constraints of the subtype (see "Formal Parameters of Constrained Subtypes").

function_definition

Either defines a function that was declared earlier or both declares and defines a function.

declare_section

Declares items that are local to the function, can be referenced in *`body`*, and cease to exist when the function completes execution.

body

Copyright © 1996, 2025, Oracle and/or its affiliates.

Required executable part and optional exception-handling part of the function. In the executable part, at least one execution path must lead to a `RETURN` statement; otherwise, a runtime error occurs.

Examples

- Example 9-2, "Declaring, Defining, and Invoking a Simple PL/SQL Function"

Related Topics

- Formal Parameter Declaration
- Procedure Declaration and Definition
- PL/SQL Subprograms

GOTO Statement

The `GOTO` statement transfers control to a labeled block or statement.

If a `GOTO` statement exits a cursor `FOR LOOP` statement prematurely, the cursor closes.

Restrictions on GOTO Statement

- A `GOTO` statement cannot transfer control into an `IF` statement, `CASE` statement, `LOOP` statement, or sub-block.
- A `GOTO` statement cannot transfer control from one `IF` statement clause to another, or from one `CASE` statement `WHEN` clause to another.
- A `GOTO` statement cannot transfer control out of a subprogram.
- A `GOTO` statement cannot transfer control into an exception handler.
- A `GOTO` statement cannot transfer control from an exception handler back into the current block (but it can transfer control from an exception handler into an enclosing block).

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***goto_statement* ::=**



Semantics

goto_statement

label

Identifies either a block or a statement (see "*plsql_block ::=*", "*statement ::=*", and "*label*").

Copyright © 1996, 2025, Oracle and/or its affiliates.

If *label* is not in the current block, then the GOTO statement transfers control to the first enclosing block in which *label* appears.

Examples

Example 14-31 GOTO Statement

A label can appear before a statement.

```
DECLARE
  p  VARCHAR2(30);
  n  PLS_INTEGER := 37;
BEGIN
  FOR j in 2..ROUND(SQRT(n)) LOOP
    IF n MOD j = 0 THEN
      p := ' is not a prime number';
      GOTO print_now;
    END IF;
  END LOOP;

  p := ' is a prime number';

  <<print_now>>
  DBMS_OUTPUT.PUT_LINE(TO_CHAR(n) || p);
END;
/
```

Result:

```
37 is a prime number
```

Example 14-32 Incorrect Label Placement

A label can only appear before a block or before a statement.

```
DECLARE
  done  BOOLEAN;
BEGIN
  FOR i IN 1..50 LOOP
    IF done THEN
       GOTO end_loop;
    END IF;
    <<end_loop>>
  END LOOP;
END;
/
```

Result:

```
  END LOOP;
  *
ERROR at line 9:
ORA-06550: line 9, column 3:
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
PLS-00103: Encountered the symbol "END" when expecting one of the following:
( begin case declare exit for goto if loop mod null raise
return select update while with <an identifier>
<a double-quoted delimited-identifier> <a bind variable> <<
continue close current delete fetch lock insert open rollback
savepoint set sql run commit forall merge pipe purge
```

Example 14-33 GOTO Statement Goes to Labeled NULL Statement

A label can appear before a `NULL` statement.

```
DECLARE
  done  BOOLEAN;
BEGIN
  FOR i IN 1..50 LOOP
    IF done THEN
      GOTO end_loop;
    END IF;
    <<end_loop>>
    NULL;
  END LOOP;
END;
/
```

Example 14-34 GOTO Statement Transfers Control to Enclosing Block

A `GOTO` statement can transfer control to an enclosing block from the current block.

```
DECLARE
  v_last_name  VARCHAR2(25);
  v_emp_id     NUMBER(6) := 120;
BEGIN
  <<get_name>>
  SELECT last_name INTO v_last_name
  FROM employees
  WHERE employee_id = v_emp_id;

  BEGIN
    DBMS_OUTPUT.PUT_LINE (v_last_name);
    v_emp_id := v_emp_id + 5;

    IF v_emp_id < 120 THEN
      GOTO get_name;
    END IF;
  END;
END;
/
```

Result:

```
Weiss
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 14-35 GOTO Statement Cannot Transfer Control into IF Statement

The `GOTO` statement transfers control into an `IF` statement, causing an error.

```
DECLARE
  valid BOOLEAN := TRUE;
BEGIN
  GOTO update_row;

  IF valid THEN
  <<update_row>>
    NULL;
  END IF;
END;
/
```

Result:

```
  GOTO update_row;
  *
ERROR at line 4:
ORA-06550: line 4, column 3:
PLS-00375: illegal GOTO statement; this GOTO cannot branch to label
'UPDATE_ROW'
ORA-06550: line 6, column 12:
PL/SQL: Statement ignored
```

Related Topics

- "Block"
- "GOTO Statement"

IF Statement

The `IF` statement either runs or skips a sequence of one or more statements, depending on the value of a `BOOLEAN` expression.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***if_statement* ::=**

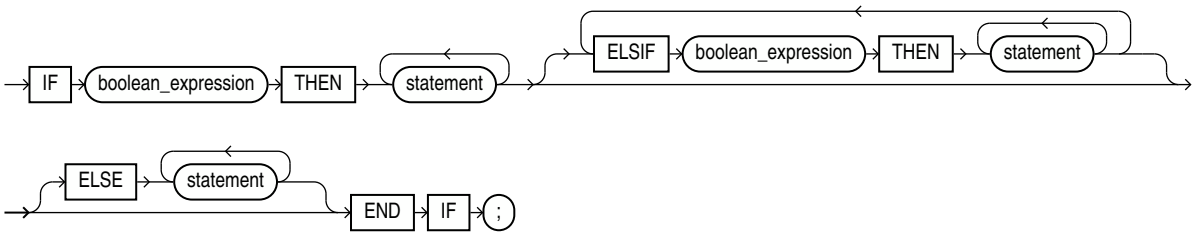

(*boolean_expression* ::= , *statement* ::=)

Semantics

boolean_expression

Expression whose value is `TRUE`, `FALSE`, or `NULL`.

The first *`boolean_expression`* is always evaluated. Each other *`boolean_expression`* is evaluated only if the values of the preceding expressions are `FALSE`.

If a *`boolean_expression`* is evaluated and its value is `TRUE`, the statements after the corresponding `THEN` run. The succeeding expressions are not evaluated, and the statements associated with them do not run.

ELSE

If no *`boolean_expression`* has the value `TRUE`, the statements after `ELSE` run.

Examples

- Example 5-1, "IF THEN Statement"
- Example 5-2, "IF THEN ELSE Statement"
- Example 5-3, "Nested IF THEN ELSE Statements"
- Example 5-4, "IF THEN ELSIF Statement"

Related Topics

In this chapter:

- "CASE Statement"
- "Expression"

In other chapters:

- "Conditional Selection Statements"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Implicit Cursor Attribute

An implicit cursor has attributes that return information about the most recently run `SELECT` or DML statement that is not associated with a named cursor.

> **Note**
>
> You can use cursor attributes only in procedural statements, not in SQL statements.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***implicit_cursor_attribute* ::=**

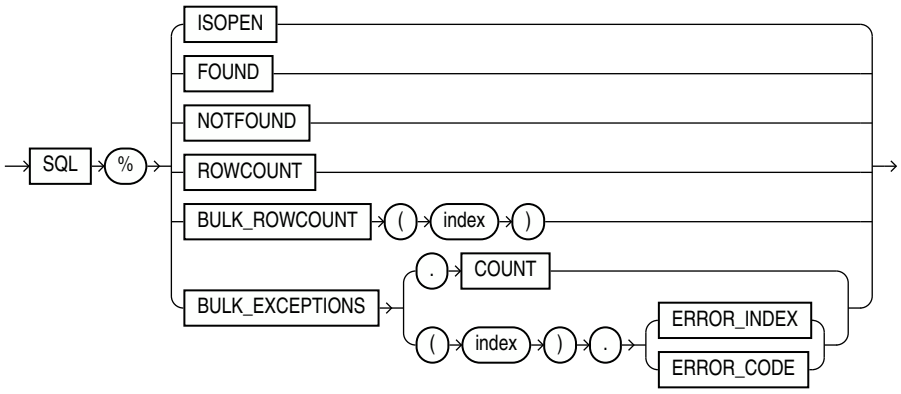

Semantics

%ISOPEN

`SQL%ISOPEN` always has the value `FALSE`.

%FOUND

`SQL%FOUND` has one of these values:

- If no `SELECT` or DML statement has run, `NULL`.
- If the most recent `SELECT` or DML statement returned a row, `TRUE`.
- If the most recent `SELECT` or DML statement did not return a row, `FALSE`.

%NOTFOUND

`SQL%NOTFOUND` has one of these values:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- If no SELECT or DML statement has run, NULL.
- If the most recent SELECT or DML statement returned a row, FALSE.
- If the most recent SELECT or DML statement did not return a row, TRUE.

%ROWCOUNT

SQL%ROWCOUNT has one of these values:

- If no SELECT or DML statement has run, NULL.
- If a SELECT or DML statement has run, the number of rows fetched so far.

SQL%BULK_ROWCOUNT

Composite attribute that is like an associative array whose *i*th element is the number of rows affected by the *i*th DML statement in the most recently completed FORALL statement. For more information, see "Getting Number of Rows Affected by FORALL Statement".

Restriction on SQL%BULK_ROWCOUNT

You cannot assign the value of SQL%BULK_ROWCOUNT(*index*) to another collection.

SQL%BULK_EXCEPTIONS

Composite attribute that is like an associative array of information about the DML statements that failed during the most recently run FORALL statement. SQL%BULK_EXCEPTIONS.COUNT is the number of DML statements that failed. If SQL%BULK_EXCEPTIONS.COUNT is not zero, then for each index value *i* from 1 through SQL%BULK_EXCEPTIONS.COUNT:

- SQL%BULK_EXCEPTIONS(*i*).ERROR_INDEX is the number of the DML statement that failed.
- SQL%BULK_EXCEPTIONS(*i*).ERROR_CODE is the Oracle Database error code for the failure.

Typically, this attribute appears in an exception handler for a FORALL statement that has a SAVE EXCEPTIONS clause. For more information, see "Handling FORALL Exceptions After FORALL Statement Completes".

Examples

- Example 7-3, "SQL%FOUND Implicit Cursor Attribute"
- Example 7-4, "SQL%ROWCOUNT Implicit Cursor Attribute"
- Example 7-15, "%FOUND Explicit Cursor Attribute"
- Example 7-14, "%ISOPEN Explicit Cursor Attribute"
- Example 7-16, "%NOTFOUND Explicit Cursor Attribute"
- Example 7-17, "%ROWCOUNT Explicit Cursor Attribute"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"
- Example 13-14, "Showing Number of Rows Affected by Each DELETE in FORALL"
- Example 13-15, "Showing Number of Rows Affected by Each INSERT SELECT in FORALL"

Related Topics

In this chapter:

- "FORALL Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Named Cursor Attribute"

In other chapters:

- "Implicit Cursors"
- "Processing Query Result Sets"

INLINE Pragma

The `INLINE` pragma specifies whether a subprogram invocation is to be inlined.

Inlining replaces a subprogram invocation with a copy of the invoked subprogram (if the invoked and invoking subprograms are in the same program unit).

> **Note**
>
> The `INLINE` pragma affects only the immediately following declaration or statement, and only some kinds of statements. For details, see "Subprogram Inlining".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***inline_pragma* ::=**



Semantics

subprogram

Name of a subprogram. If *`subprogram`* is overloaded, then the `INLINE` pragma applies to every subprogram with that name.

YES

If `PLSQL_OPTIMIZE_LEVEL=2`, `'YES'` specifies that the subprogram invocation is to be inlined.

If `PLSQL_OPTIMIZE_LEVEL=3`, `'YES'` specifies that the subprogram invocation has a high priority for inlining.

NO

Specifies that the subprogram invocation is not to be inlined.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

- Example 13-1, "Specifying that Subprogram Is To Be Inlined"
- Example 13-2, "Specifying that Overloaded Subprogram Is To Be Inlined"
- Example 13-3, "Specifying that Subprogram Is Not To Be Inlined"
- Example 13-4, "PRAGMA INLINE ... 'NO' Overrides PRAGMA INLINE ... 'YES'"

Related Topics

- "Subprogram Inlining"

Invoker's Rights and Definer's Rights Clause

Specifies the `AUTHID` property of a stored PL/SQL subprogram. The `AUTHID` property affects the name resolution and privilege checking of SQL statements that the unit issues at run time.

The *invoker_rights_clause* can appear in the following SQL statements :

- ALTER TYPE Statement
- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE PROCEDURE Statement
- CREATE TYPE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Related Topics

Syntax

***invoker_rights_clause* ::=**



Semantics

invoker_rights_clause

When it appears in the package declaration, it specifies the `AUTHID` property of functions and procedures in the package, and of the explicit cursors declared in the package specification.

When it appears in a standalone function declaration, it specifies the `AUTHID` property of the function.

When it appears in a standalone procedure declaration, it specifies the `AUTHID` property of the procedure.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The *invoker_rights_clause* can appear only once in a subprogram declaration.

When it appears in an ADT, it specifies the `AUTHID` property of the member functions and procedures of the ADT.

Restrictions on *invoker_rights_clause*

The following restrictions apply for types:

- This clause is valid only for ADTs, not for a nested table or `VARRAY` type.
- You can specify this clause for clarity if you are creating a subtype. However, a subtype inherits the `AUTHID` property of its supertype, so you cannot specify a different value than was specified for the supertype.
- If the supertype was created with `AUTHID DEFINER`, then you must create the subtype in the same schema as the supertype.
- You cannot specify the `AUTHID` property of SQL macros. They behave like IR units.

Related Topics

In this book:

- "Invoker's Rights and Definer's Rights (AUTHID Property)"for information about the `AUTHID` property
- "Subprogram Properties"

INSERT Statement Extension

The PL/SQL extension to the SQL `INSERT` statement lets you specify a record name in the *`values_clause`* of the *`single_table_insert`* instead of specifying a column list in the *`insert_into_clause`*

Effectively, this form of the `INSERT` statement inserts the record into the table; actually, it adds a row to the table and gives each column of the row the value of the corresponding record field.

> **See Also**
>
> *Oracle Database SQL Language Reference* for the syntax of the SQL `INSERT` statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***insert_into_clause* ::=**



***values_clause* ::=**



Semantics

insert_into_clause

dml_table_expression_clause

Typically a table name. For complete information, see *Oracle Database SQL Language Reference*.

t_alias

An alias for *dml_table_expression_clause*.

values_clause

record

Name of a record variable of type `RECORD` or `%ROWTYPE`. *record* must represent a row of the item explained by *dml_table_expression_clause*. That is, for every column of the row, the record must have a field with a compatible data type. If a column has a `NOT NULL` constraint, then its corresponding field cannot have a `NULL` value.

> **See Also**
>
> *Oracle Database SQL Language Reference* for the complete syntax of the `INSERT` statement

Examples

- Example 6-60, "Initializing Table by Inserting Record of Default Values"

Related Topics

In this chapter:

- "Record Variable Declaration"
- "%ROWTYPE Attribute"

In other chapters:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Inserting Records into Tables"
- "Restrictions on Record Inserts and Updates"

Iterator

The iterator specifies an iterand and the iteration controls.

An iterator can appear in the following statements:

- FOR LOOP Statement
- Qualified Expression

Syntax

***iterator* ::=**



(*iterand_decl* ::=, *iteration_ctl_seq* ::=)

***iterand_decl* ::=**



***iteration_ctl_seq* ::=**



***qual_iteration_ctl* ::=**



(*iteration_control* ::=, *pred_clause_seq* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***iteration_control* ::=**



(*stepped_control* ::=, *single_expression_control* ::= , *values_of_control* ::=, *indices_of_control* ::=, *pairs_of_control* ::=, *cursor_iteration_control* ::=)

***pred_clause_seq* ::=**

***stepped_control* ::=**



***single_expression_control* ::=**



***values_of_control* ::=**

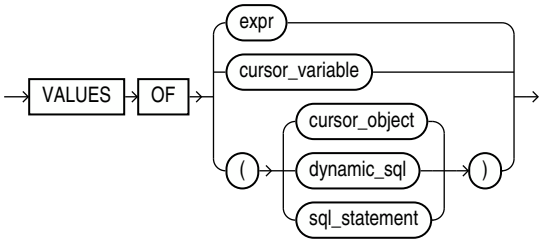

(*dynamic_sql* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***indices_of_control* ::=**

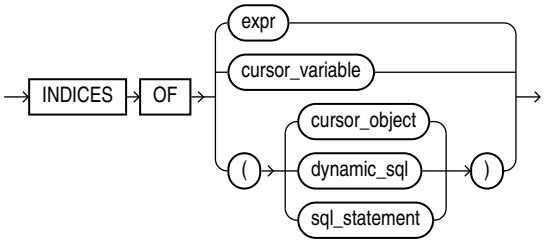

(*dynamic_sql* ::=)

***pairs_of_control* ::=**

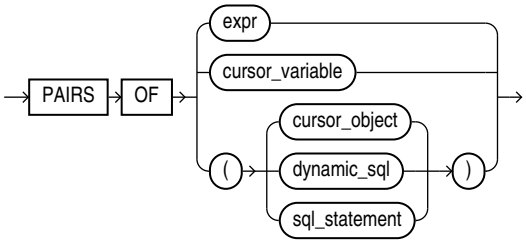

(*dynamic_sql* ::=)

***cursor_iteration_control* ::=**



(*dynamic_sql* ::=)

***dynamic_sql* ::=**

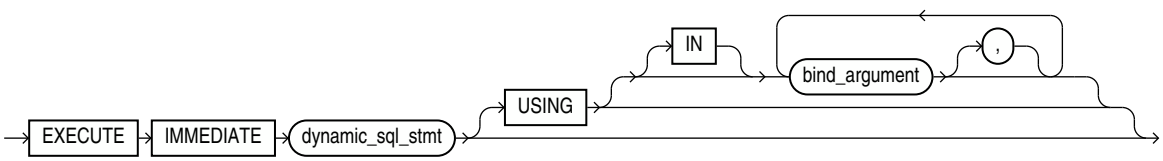

Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

iterator

The iterator specifies an iterand and the iteration controls.

Statements outside the loop cannot reference *iterator*. Statements inside the loop can reference *iterator*, but cannot change its value. After the `FOR LOOP` statement runs, *iterator* is undefined.

iterand_decl

An iterand type can be implicitly or explicitly declared. You cannot explicitly initialize an iterand.

An iterand type is implicitly declared when no type declaration follows the iterand in the loop header. The implicit type is determined by the first iteration control.

Table 14-1 Iterand Implicit Type Defaults

Iteration Control	Implicit Iterand Type
stepped control	`PLS_INTEGER`
single expression	`PLS_INTEGER`
cursor control	`CURSOR%ROWTYPE`
`VALUES OF` control	collection element type
`INDICES OF` control	collection index type
`PAIRS OF` control	The first iterand denotes the index type of collection and the second iterand denotes the element type of collection

pls_identifier

The iterand name for the implicitly declared variable that is local to the `FOR LOOP` statement.

[MUTABLE | IMMUTABLE]

The mutability property of an iterand determines whether or not it can be assigned in the loop body. If all iteration controls specified in an iterator are cursor controls, the iterand is mutable by default. Otherwise, the iterand is immutable. The default mutability property of an iterand can be changed in the iterand declaration by specifying the `MUTABLE` or `IMMUTABLE` keyword after the iterand variable. The mutability property keywords are not reserved and could be used as type names. Such usage would be ambiguous. Therefore, you must explicitly specify the mutability property of an iterand in the iterand declaration if its type is named mutable or immutable. Iterand for `INDICES OF` iteration control and the index iterand for `PAIRS OF` iteration control cannot be made mutable.

constrained_type

An iterand is explicitly declared when the iterand type is specified in the loop header. Any constraint defined for a type is considered when assigning values to the iterand. The values generated by the iteration controls must be assignment compatible with the iterand type. Usual conversion rules apply. Exceptions are raised for all constraint violations.

iteration_ctl_seq

Multiple iteration controls may be chained together by separating them with commas.

Restriction on *iteration_ctl_seq*:

Copyright © 1996, 2025, Oracle and/or its affiliates.

Because two iterands are required for the pairs of iterand, pairs of iteration controls may not be mixed with other kinds of iteration controls.

qual_iteration_ctl

The qualified iteration control specifies the REVERSE option and the optional stopping and skipping predicates clauses.
[REVERSE]

When the optional keyword `REVERSE` is specified, the order of values in the sequence is reversed.

You can use this option with a collection vector value expression. In that case, specifying `REVERSE` generates values from `LAST` to `FIRST` rather than from `FIRST` to `LAST`.

Restrictions on `REVERSE`:

- You cannot use this option when a pipelined function is specified in the iteration control.
- You cannot use this option with single expression iteration control since it generates a single value and therefore the keyword does not have any sensible meaning for this control.
- You cannot use this option when the iteration control specifies a SQL statement. This creates a sequence of records returned by the query. You can specify an `ORDER BY` clause on the SQL statement to sort the rows in the appropriate order.
- You cannot use this option when the collection is a cursor,cursor variable, dynamic SQL, or is an expression that calls a pipelined table function.

iteration_control

An iteration control provides a sequence of values to the iterand.

pred_clause_seq

An iteration control may be modified with an optional stopping predicate clause followed by an optional skipping predicate clause. The expressions in the predicates must have a `BOOLEAN` type.

[WHILE *boolean_expression*]

A stopping predicate clause can cause the iteration control to be exhausted. The *boolean_expression* is evaluated at the beginning of each iteration of the loop. If it fails to evaluate to `TRUE`, the iteration control is exhausted.

[WHEN *boolean_expression*]

A skipping predicate clause can cause the loop body to be skipped for some values. The *boolean_expression* is evaluated. If it fails to evaluate to `TRUE`, the iteration control skips to the next value.

stepped_control

***lower_bound .. upper_bound* [BY *step*]**

Without `REVERSE`, the value of *`iterand`* starts at *`lower_bound`* and increases by *`step`* with each iteration of the loop until it reaches *`upper_bound`*.

With `REVERSE`, the value of *`iterand`* starts at *`upper_bound`* and decreases by *`step`* with each iteration of the loop until it reaches *`lower_bound`*. If *`upper_bound`* is less than *`lower_bound`*, then the *`statements`* never run.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The default value for *step* is one if this optional BY clause is not specified.

lower_bound and *upper_bound* must evaluate to numbers (either numeric literals, numeric variables, or numeric expressions). If a bound does not have a numeric value, then PL/SQL raises the predefined exception VALUE_ERROR. PL/SQL evaluates *lower_bound* and *upper_bound* once, when the FOR LOOP statement is entered, and stores them as temporary PLS_INTEGER values, rounding them to the nearest integer if necessary.

If *lower_bound* equals *upper_bound*, the *statements* run only once.

The *step* value must be greater than zero.

single_expression_control

A single expression iteration control generates a single value. If REPEAT is specified, the expression will be evaluated repeatedly generating a sequence of values until a stopping clause causes the iteration control to be exhausted.

Restrictions on *single_expression_control*:

REVERSE is not allowed for a single expression iteration control.

values_of_control

The element type of a collection must be assignment compatible with the iterand.

indices_of_control

The index type of a collection must be assignment compatible with the iterand.

The iterand used with an INDICES OF iteration control cannot be mutable.

pairs_of_control

The PAIRS OF iteration control requires two iterands. You cannot mix the PAIRS OF iteration control with other kinds of controls. The first iterand is the index iterand and the second is the value iterand. Each iterand may be followed by an explicit type.

The element type of the collection must be assignment compatible with the value iterand. The index type of the collection must be assignment compatible with the index iterand.

The index iterand used with a PAIRS OF iteration control cannot be mutable.

cursor_iteration_control

Cursor iteration controls generate the sequence of records returned by an explicit or implicit cursor. The cursor definition is the controlling expression.

Restrictions on *cursor_iteration_control*:

You cannot use REVERSE with a cursor iteration control.

cursor_object

A *cursor_object* is an explicit PL/SQL cursor object.

sql_statement

A *sql_statement* is an implicit PL/SQL cursor object created for a SQL statement specified directly in the iteration control.

Copyright © 1996, 2025, Oracle and/or its affiliates.

cursor_variable

Name of a previously declared variable of a `REF CURSOR` object.

dynamic_sql

EXECUTE IMMEDIATE *dynamic_sql_stmt* [USING [IN] (*bind_argument* [,])+]

You can use a dynamic query in place of an implicit cursor definition in a cursor or collection iteration control. Such a construct cannot provide a default type; if it is used as the first iteration control, an explicit type must be specified for the iterand, or for the value iterand for a pairs of control.

The optional `USING` clause is the only clause allowed with the dynamic SQL. It can only possibly have IN one or more bind variable, each separated by a comma.

dynamic_sql_stmt

String literal, string variable, or string expression that represents a SQL statement. Its type must be either `CHAR`, `VARCHAR2`, or `CLOB`.

> ⚠ **Caution**
>
> When using dynamic SQL, beware of SQL injection, a security risk. For more information about SQL injection, see "SQL Injection".

Examples

- Example 5-26, "Using Dynamic SQL as an Iteration Control"
- Example 5-18, "Stepped Range Iteration Controls"
- Example 5-19, "STEP Clause in FOR LOOP Statement"
- Example 5-25, "Cursor Iteration Controls"
- Example 5-22, "VALUES OF Iteration Control"
- Example 5-23, "INDICES OF Iteration Control"
- Example 5-24, "PAIRS OF Iteration Control"

Related Topics

- FOR LOOP Statement Overview
- Qualified Expressions Overview

Named Cursor Attribute

Every named cursor (explicit cursor or cursor variable) has four attributes, each of which returns information about the execution of a DML statement.

> ⓘ **Note**
>
> You can use cursor attributes only in procedural statements, not in SQL statements.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***named_cursor_attribute* ::=**

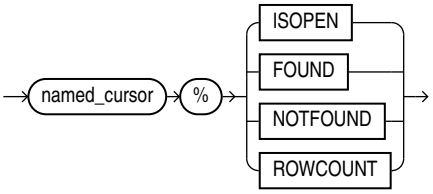

***named_cursor* ::=**



Semantics

named_cursor_attribute

%ISOPEN

named_cursor`%ISOPEN` has the value `TRUE` if the cursor is open, and `FALSE` if it is not open.

%FOUND

named_cursor`%FOUND` has one of these values:

- If the cursor is not open, `INVALID_CURSOR`
- If cursor is open but no fetch was tried, `NULL`.
- If the most recent fetch returned a row, `TRUE`.
- If the most recent fetch did not return a row, `FALSE`.

%NOTFOUND

named_cursor`%NOTFOUND` has one of these values:

- If cursor is not open, `INVALID_CURSOR`.
- If cursor is open but no fetch was tried, `NULL`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- If the most recent fetch returned a row, `FALSE`.
- If the most recent fetch did not return a row, `TRUE`.

%ROWCOUNT

named_cursor`%ROWCOUNT` has one of these values:

- If cursor is not open, `INVALID_CURSOR`.
- If cursor is open, the number of rows fetched so far.

named_cursor

explicit_cursor

Name of an explicit cursor.

cursor_parameter

Name of a formal cursor parameter.

cursor_variable

Name of a cursor variable.

:*host_cursor_variable*

Name of a cursor variable that was declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *host_cursor_variable*.

Examples

- Example 7-14, "%ISOPEN Explicit Cursor Attribute"
- Example 7-15, "%FOUND Explicit Cursor Attribute"
- Example 7-16, "%NOTFOUND Explicit Cursor Attribute"
- Example 7-17, "%ROWCOUNT Explicit Cursor Attribute"

Related Topics

In this chapter:

- "Cursor Variable Declaration"
- "Explicit Cursor Declaration and Definition"
- "Implicit Cursor Attribute"

In other chapters:

- "Explicit Cursor Attributes"

Copyright © 1996, 2025, Oracle and/or its affiliates.

NULL Statement

The `NULL` statement is a "no-op" (no operation)—it only passes control to the next statement.

> **Note**
>
> The `NULL` statement and the `BOOLEAN` value `NULL` are not related.

Topics

- Syntax
- Examples
- Related Topics

Syntax

***null_statement* ::=**

Examples

- Example 5-30, "NULL Statement Showing No Action"
- Example 5-31, "NULL Statement as Placeholder During Subprogram Creation"

Related Topics

- "NULL Statement"

OPEN Statement

The `OPEN` statement opens an explicit cursor, allocates database resources to process the associated query, identifies the result set, and positions the cursor before the first row of the result set.

If the query has a `FOR UPDATE` clause, the `OPEN` statement locks the rows of the result set.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***open_statement* ::=**



Semantics

cursor

Name of an explicit cursor that is not open.

actual_cursor_parameter

List of actual parameters for the cursor that you are opening. An actual parameter can be a constant, initialized variable, literal, or expression. The data type of each actual parameter must be compatible with the data type of the corresponding formal parameter.

You can specify actual cursor parameters with either positional notation or named notation. For information about these notations, see "Positional, Named, and Mixed Notation for Actual Parameters".

If the cursor specifies a default value for a parameter, you can omit that parameter from the parameter list. If the cursor has no parameters, or specifies a default value for every parameter, you can either omit the parameter list or specify an empty parameter list.

Examples

- Example 7-11, "Explicit Cursor that Accepts Parameters"
- Example 7-12, "Cursor Parameters with Default Values"

Related Topics

In this chapter:

- "CLOSE Statement"
- "Explicit Cursor Declaration and Definition"
- "FETCH Statement"
- "OPEN FOR Statement"

In other chapters:

- "Opening and Closing Explicit Cursors"
- "Explicit Cursors that Accept Parameters"

Copyright © 1996, 2025, Oracle and/or its affiliates.

OPEN FOR Statement

The `OPEN FOR` statement associates a cursor variable with a query, allocates database resources to process the query, identifies the result set, and positions the cursor before the first row of the result set.

If the query has a `FOR UPDATE` clause, then the `OPEN FOR` statement locks the rows of the result set.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***open_for_statement* ::=**



***using_clause* ::=**

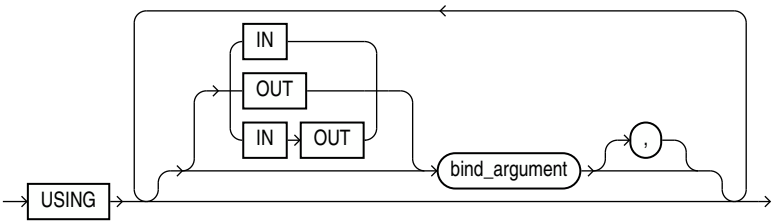

Semantics

open_for_statement

cursor_variable

Name of a cursor variable. If *`cursor_variable`* is the formal parameter of a subprogram, then it must not have a return type. For information about cursor variables as subprogram parameters, see "Cursor Variables as Subprogram Parameters".

:host_cursor_variable

Name of a cursor variable that was declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *`host_cursor_variable`*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The data type of a host cursor variable is compatible with the return type of any PL/SQL cursor variable.

select_statement

SQL `SELECT` statement (not a PL/SQL `SELECT INTO` statement). Typically, *`select_statement`* returns multiple rows.

> **See**
>
> *Oracle Database SQL Language Reference* for `SELECT` statement syntax

dynamic_string

String literal, string variable, or string expression of the data type `CHAR`, `VARCHAR2`, or `CLOB`, which represents a SQL `SELECT` statement. Typically, *`dynamic_statement`* represents a SQL `SELECT` statement that returns multiple rows.

using_clause

Specifies bind variables, using positional notation.

> **Note**
>
> If you repeat placeholder names in *`dynamic_sql_statement`*, be aware that the way placeholders are associated with bind variables depends on the kind of dynamic SQL statement. For details, see "Repeated Placeholder Names in Dynamic SQL Statements."

Restriction on *using_clause*

Use if and only if *`select_statement`* or *`dynamic_sql_stmt`* includes placeholders for bind variables.

IN, OUT, IN OUT

Parameter modes of bind variables. An `IN` bind variable passes its value to the *`select_statement`* or *`dynamic_string`*. An `OUT` bind variable stores a value that *`dynamic_string`* returns. An `IN OUT` bind variable passes its initial value to *`dynamic_string`* and stores a value that *`dynamic_string`* returns. **Default:** `IN`.

bind_argument

Expression whose value replaces its corresponding placeholder in *`select_statement`* or *`dynamic_string`* at run time. You must specify a *`bind_argument`* for every placeholder.

> **Note**
>
> Bind variables can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.

Restrictions on *bind_argument*

Copyright © 1996, 2025, Oracle and/or its affiliates.

- *bind_argument* cannot be an associative array indexed by string.
- *bind_argument* cannot be the reserved word NULL.

  To pass the value NULL to the dynamic SQL statement, use an uninitialized variable where you want to use NULL, as in Example 8-7.

Examples

- Example 7-26, "Fetching Data with Cursor Variables"
- Example 7-30, "Querying a Collection with Static SQL"
- Example 7-31, "Procedure to Open Cursor Variable for One Query"
- Example 7-32, "Opening Cursor Variable for Chosen Query (Same Return Type)"
- Example 7-33, "Opening Cursor Variable for Chosen Query (Different Return Types)"
- Example 8-8, "Native Dynamic SQL with OPEN FOR, FETCH, and CLOSE Statements"
- Example 8-9, "Querying a Collection with Native Dynamic SQL"

Related Topics

In this chapter:

- "CLOSE Statement"
- "Cursor Variable Declaration"
- "EXECUTE IMMEDIATE Statement"
- "FETCH Statement"
- "OPEN Statement"

In other chapters:

- "Opening and Closing Cursor Variables"
- "OPEN FOR, FETCH, and CLOSE Statements"

PARALLEL_ENABLE Clause

Enables the function for parallel execution, making it safe for use in concurrent sessions of parallel DML evaluations.

Indicates that the function can run from a parallel execution server of a parallel query operation.

The PARALLEL_ENABLE clause can appear in the following SQL statements:

- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***parallel_enable_clause* ::=**

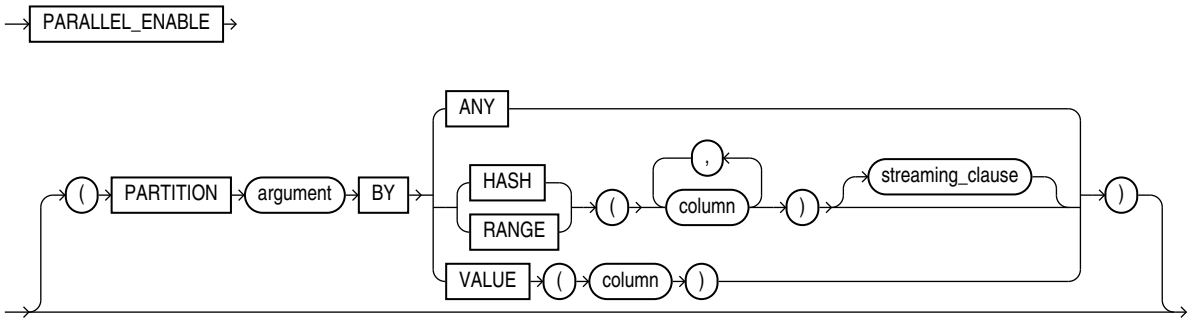

***streaming_clause* ::=**



Semantics

parallel_enable_clause

The *parallel_enable_clause* can appear only once in the function.

The function must not use session state, such as package variables, because those variables are not necessarily shared among the parallel execution servers.

Use the optional `PARTITION` *`argument`* `BY` clause only with a function that has a `REF CURSOR` data type. This clause lets you define the partitioning of the inputs to the function from the `REF CURSOR` argument. Partitioning the inputs to the function affects the way the query is parallelized when the function is used as a table function in the `FROM` clause of the query.

ANY

Indicates that the data can be partitioned randomly among the parallel execution servers

> **Note**
>
> You can partition weak cursor variable arguments to table functions only with `ANY`, not with `RANGE`, `HASH`, or `VALUE`.

RANGE or HASH

Partitions data into specified columns that are returned by the `REF CURSOR` argument of the function.

Copyright © 1996, 2025, Oracle and/or its affiliates.

streaming_clause

The optional *streaming_clause* lets you order or cluster the parallel processing.

ORDER BY | CLUSTER BY

ORDER BY or CLUSTER BY indicates that the rows on a parallel execution server must be locally ordered and have the same key values as specified by the *column* list.

VALUE

Specifies direct-key partitioning, which is intended for table functions used when executing MapReduce workloads. The *column* must be of data type NUMBER. VALUE distributes row processing uniformly over the available reducers.

If the column has more reducer numbers than there are available reducers, then PL/SQL uses a modulus operation to map the reducer numbers in the column into the correct range.

When calculating the number of the reducer to process the corresponding row, PL/SQL treats a negative value as zero and rounds a positive fractional value to the nearest integer.

> **See Also**
>
> *Oracle Database Data Cartridge Developer's Guide* for information about using parallel table functions

expr

expr identifies the REF CURSOR parameter name of the table function on which partitioning was specified, and on whose columns you are specifying ordering or clustering for each concurrent session in a parallel query execution.

Restriction on *parallel_enable_clause*

You cannot specify the *parallel_enable_clause* for a nested function or SQL macro.

Related Topics

In this chapter:

- Function Declaration and Definition

In other chapters:

- Overview of Table Functions
- Creating Pipelined Table Functions

Copyright © 1996, 2025, Oracle and/or its affiliates.

PIPE ROW Statement

The `PIPE ROW` statement, which can appear only in the body of a pipelined table function, returns a table row (but not control) to the invoker of the function.

> **Note**
>
> - If a pipelined table function is part of an autonomous transaction, then it must `COMMIT` or `ROLLBACK` before each `PIPE ROW` statement, to avoid an error in the invoking subprogram.
> - To improve performance, the PL/SQL runtime system delivers the piped rows to the invoker in batches.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***pipe_row_statement* ::=**



Semantics

pipe_row_statement

row

Row (table element) that the function returns to its invoker, represented by an expression whose type is that of the table element.

If the expression is a record variable, it must be explicitly declared with the data type of the table element. It cannot be declared with a data type that is only structurally identical to the element type. For example, if the element type has a name, then the record variable cannot be declared explicitly with `%TYPE` or `%ROWTYPE` or implicitly with `%ROWTYPE` in a cursor `FOR LOOP` statement.

Examples

- Example 13-30, "Creating and Invoking Pipelined Table Function"
- Example 13-31, "Pipelined Table Function Transforms Each Row to Two Rows"
- Example 13-33, "Pipelined Table Function with Two Cursor Variable Parameters"
- Example 13-34, "Pipelined Table Function as Aggregate Function"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example 13-35, "Pipelined Table Function Does Not Handle NO_DATA_NEEDED"
- Example 13-36, "Pipelined Table Function Handles NO_DATA_NEEDED"

Related Topics

In this chapter:

- "Function Declaration and Definition"

In other chapters:

- "Creating Pipelined Table Functions"

PIPELINED Clause

Instructs the database to iteratively return the results of a **table function** or **polymorphic table function** .

Use only with a table function, to specify that it is pipelined. A pipelined table function returns a row to its invoker immediately after processing that row and continues to process rows. To return a row (but not control) to the invoker, the function uses the "PIPE ROW Statement".

A table function returns a collection type.

A polymorphic table function is a table function whose return type is determined by the arguments.

You query both kinds of table functions by using the `TABLE` keyword before the function name in the `FROM` clause of the query. For example:

```
SELECT * FROM TABLE(function_name(...))
```

The `TABLE` operator is optional when the table function arguments list or empty list () appears. For example:

```
SELECT * FROM function_name()
```

the database then returns rows as they are produced by the function.

The PIPELINED option can appear in the following SQL statements:

- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE PACKAGE BODY Statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***pipelined_clause* ::=**

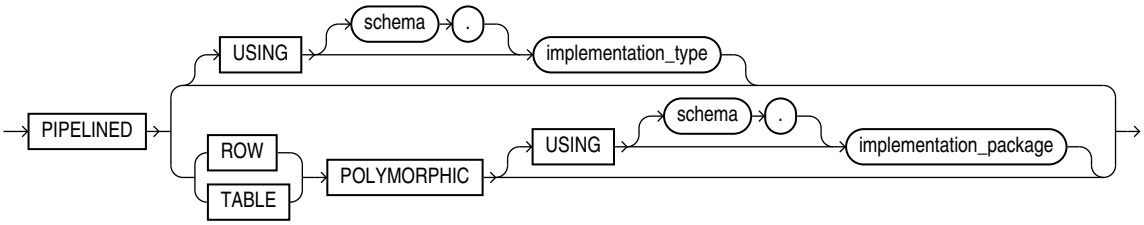

Semantics

pipelined_clause

The *pipelined_clause* can appear only once in the function.

PIPELINED

To make a pipelined function, include the *pipelined_clause* in the function definition. If you declare the pipelined function before defining it, you must specify the `PIPELINED` option in the function declaration.

{ IS | USING }

- If you specify the keyword `PIPELINED` alone (`PIPELINED IS ...`), then the PL/SQL function body must use the `PIPE` keyword. This keyword instructs the database to return single elements of the collection out of the function, instead of returning the whole collection as a single value.
- You can specify the `PIPELINED USING` *`implementation_type`* clause to predefine an interface containing the start, fetch, and close operations. The implementation type must implement the `ODCITable` interface and must exist at the time the table function is created. This clause is useful for table functions implemented in external languages such as C++ and Java.

  If the return type of the function is `ANYDATASET`, then you must also define a describe method (`ODCITableDescribe`) as part of the implementation type of the function.

[schema.] implementation_type

The implementation type must be an ADT containing the implementation of the `ODCIAggregate` subprograms. If you do not specify *`schema`*, then the database assumes that the implementation type is in your schema.

Restriction on PIPELINED

You cannot specify `PIPELINED` for a nested function or a SQL macro.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> You cannot run a pipelined table function over a database link. The reason is that the return type of a pipelined table function is a SQL user-defined type, which can be used only in a single database (as explained in *Oracle Database Object-Relational Developer's Guide*). Although the return type of a pipelined table function might appear to be a PL/SQL type, the database actually converts that PL/SQL type to a corresponding SQL user-defined type.

PIPELINED [ROW | TABLE] POLYMORPHIC [USING [schema.] implementation_package]

The polymorphic table function elaborator can appear in standalone function declaration or package function declaration.

PIPELINED

Required when defining a polymorphic table function.

ROW

Specify `ROW` when a single input argument of type `TABLE` determines new columns using any single row.

TABLE

Specify `TABLE` when a single input argument of type `TABLE` determines the new columns using the current row and operates on an entire table or a logical partition of a table.

POLYMORPHIC

Restrictions on `POLYMORPHIC`

The following are not allowed for `POLYMORPHIC` table functions:

- PARALLEL_ENABLE clause
- RESULT_CACHE clause
- DETERMINISTIC option
- AUTHID property (Invoker's Rights and Definer's Rights Clause)

[USING *[schema.] implementation_package*]

References the polymorphic table function (PTF) implementation package. The specification must include `DESCRIBE` method. The specification of `OPEN`, `FETCH_ROWS` and `CLOSE` methods is optional. The specification for the implementation package must already exist (unless the PTF and its implementation reside in the same package).

If a polymorphic table function and its implementation methods are defined in the same package, then the `USING` clause is optional.

Examples

- Examples for PIPE ROW statement examples
- Skip_col Polymorphic Table Function Example
- To_doc Polymorphic Table Function Example
- Implicit_echo Polymorphic Table Function Example

Copyright © 1996, 2025, Oracle and/or its affiliates.

- *Oracle Database PL/SQL Packages and Types Reference* for more examples using the DBMS_TF package utilities

Related Topics

In this chapter:

- "Function Declaration and Definition"

In other chapters:

- "Overview of Table Functions"
- "Overview of Polymorphic Table Functions" for more information about PTFs
- "Subprogram Parts"
- "Creating Pipelined Table Functions"
- "Chaining Pipelined Table Functions for Multiple Transformations"

In other books:

- *Oracle Database PL/SQL Packages and Types Reference* for more information about the DBMS_TF package containing utilities for Polymorphic Table Functions (PTF) implementation
- *Oracle Database Data Cartridge Developer's Guide* for information about using pipelined table functions

Procedure Declaration and Definition

Before invoking a procedure, you must declare and define it. You can either declare it first (with ***procedure_declaration***) and then define it later in the same block, subprogram, or package (with ***procedure_definition***) or declare and define it at the same time (with ***procedure_definition***).

A **procedure** is a subprogram that performs a specific action. A procedure invocation (or call) is a statement.

A procedure declaration is also called a **procedure specification** or **procedure spec**.

> **Note**
>
> For more information about standalone procedures, see "CREATE PROCEDURE Statement". For more information about package procedures, see "CREATE PACKAGE Statement".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***procedure_declaration* ::=**



(*procedure_properties ::=*)

***procedure_heading* ::=**



See "*parameter_declaration ::=*".

***procedure_properties* ::=**

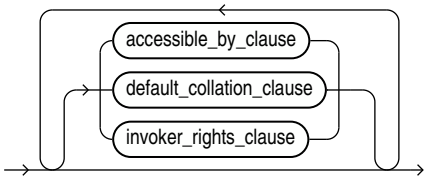

(*accessible_by_clause ::=* , *default_collation_clause ::=* , *invoker_rights_clause ::=*)

***procedure_definition* ::=**



(*body ::=* , *declare_section ::=* , *call_spec ::=*)

Semantics

procedure_declaration

Declares a procedure, but does not define it. The definition must appear later in the same block, subprogram, or package as the declaration.

procedure_heading

procedure

Copyright © 1996, 2025, Oracle and/or its affiliates.

Name of the procedure that you are declaring or defining.

procedure_properties

Each procedure property can appear only once in the procedure declaration. The properties can appear in any order. Properties appear before the `IS` or `AS` keyword in the heading. The properties cannot appear in nested procedures. Only the `ACCESSIBLE BY` property can appear in package procedures.

Standalone procedures may have the following properties in their declaration.

- ACCESSIBLE BY Clause
- DEFAULT COLLATION Clause
- Invoker's Rights and Definer's Rights (AUTHID Property)

procedure_definition

Either defines a procedure that was declared earlier or both declares and defines a procedure.

declare_section

Declares items that are local to the procedure, can be referenced in *body*, and cease to exist when the procedure completes execution.

body

Required executable part and optional exception-handling part of the procedure.

Examples

- Example 9-1, "Declaring, Defining, and Invoking a Simple PL/SQL Procedure"

Related Topics

In this chapter:

- "Formal Parameter Declaration"
- "Function Declaration and Definition"

In other chapters:

- "PL/SQL Subprograms"
- "CREATE PROCEDURE Statement"

Qualified Expression

Using qualified expressions, you can declare and define a complex value in a compact form where the value is needed.

Qualified expressions appear in:

- Collection Variable Declaration
- Expression

Topics

- Syntax
- Semantics

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Examples
- Related Topics

Syntax

***qualified_expression* ::=**



(*typemark* ::=, *aggregate* ::=)

***typemark* ::=**



***type_name* ::=**



***aggregate* ::=**



(*positional_choice_list* ::=, *explicit_choice_list* ::= *others_choice* ::=)

***positional_choice_list* ::=**



***sequence_iterator_choice* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

***explicit_choice_list* ::=**

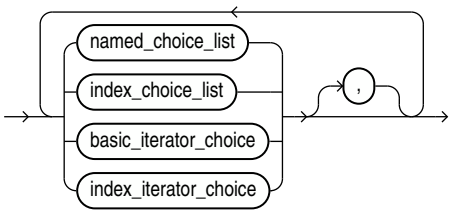

(*named_choice_list* ::=, *indexed_choice_list* ::=, *basic_iterator_choice* ::=, *index_iterator_choice* ::=)

***named_choice_list* ::=**



***indexed_choice_list* ::=**



***basic_iterator_choice* ::=**



(*iterator* ::=)

***index_iterator_choice* ::=**

(*iterator* ::=)

***others_choice* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

qualified_expression

Qualified expressions for `RECORD` types are allowed in any context where an expression of `RECORD` type is allowed.

Qualified expressions for associative array types are allowed in any context where an expression of associative array type is allowed.

typemark (aggregate)

Specifies explicitly the type of the aggregate (qualified items).

typemark

Qualified expressions use an explicit type indication to provide the type of the qualified item. This explicit indication is known as a *typemark*.

type_name

[*identifier* .]*identifier*

Indicates the type of the qualified item.

aggregate

A qualified expression combines expression elements to create values of a `RECORD` type, or associative array type.

positional_choice_list

***expr* [,]**

Positional association is allowed for qualified expressions of `RECORD` type.

A positional association may not follow a named association in the same construct (and vice versa).

sequence_iterator_choice

FOR *iterator* SEQUENCE => *expr*

The sequence iterator choice association is a positional argument and may be intermixed freely with other positional arguments. All positional arguments must precede any non-positional arguments. Sequence iteration is not allowed for INDEX BY VARCHAR2 arrays.

explicit_choice_list

named_choice_list* | *indexed_choice_list* | *basic_iterator_choice* | *index_iterator_choice

Named choices must use names of fields from the qualifying structure type. Index key values must be compatible with the index type for the qualifying vector type.

named_choice_list

A named choice applies only to structured types

***identifier => expr* [,]**

Named association is allowed for qualified expressions of `RECORD` type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

indexed_choice_list

An index choice applies only to vector types.

***expr => expr* [,]**

Indexed choices (key-value pairs) is allowed for qualified expressions of associative array types. Both the key and the value may be expressions.

Using `NULL` as an index key value is not permitted with associative array type constructs.

basic_iterator_choice

FOR *iterator* => *expr*

The basic iterator choice association uses the iterand as an index.

Restrictions:

The `PAIRS OF` iteration control may not be used with the basic iterator choice association.

index_iterator_choice

FOR *iterator* INDEX *expr* => *expr*

The index iterator choice association provides an index expression along with the value expression.

others_choice

You can use the OTHERS selector in aggregates for record types and aggregates for varrays. The OTHERS choice must be your final choice.

Examples

- Assigning Values to RECORD Type Variables Using Qualified Expressions, "Assigning Values to RECORD Type Variables Using Qualified Expressions"
- Example 6-11, "Assigning Values to Associative Array Type Variables Using Qualified Expressions"
- Example 6-8, "Iterator Choice Association in Qualified Expressions"
- Example 6-9, "Index Iterator Choice Association in Qualified Expressions"
- Example 6-10, "Sequence Iterator Choice Association in Qualified Expressions"
- Example 5-27, "Using Dynamic SQL As An Iteration In A Qualified Expression"

Related Topics

- "Qualified Expressions Overview" for more conceptual information and examples
- "Expressions"
- Assigning Values to Collection Variables
- Assigning Values to Record Variables

Copyright © 1996, 2025, Oracle and/or its affiliates.

RAISE Statement

The `RAISE` statement explicitly raises an exception.

Outside an exception handler, you must specify the exception name. Inside an exception handler, if you omit the exception name, the `RAISE` statement reraises the current exception.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***raise_statement* ::=**



Semantics

exception

Name of an exception, either predefined (see Table 12-3) or user-declared (see "Exception Declaration").

`exception` is optional only in an exception handler, where the default is the current exception (see "Reraising Current Exception with RAISE Statement").

Examples

- Example 12-10, "Declaring, Raising, and Handling User-Defined Exception"
- Example 12-11, "Explicitly Raising Predefined Exception"
- Example 12-12, "Reraising Exception"

Related Topics

In this chapter:

- "Exception Declaration"
- "Exception Handler"

In other chapters:

- "Raising Exceptions Explicitly"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Record Variable Declaration

A **record variable** is a composite variable whose internal components, called fields, can have different data types. The value of a record variable and the values of its fields can change.

You reference an entire record variable by its name. You reference a record field with the syntax *record.field*.

You can create a record variable in any of these ways:

- Define a record type and then declare a variable of that type.
- Use `%ROWTYPE` to declare a record variable that represents either a full or partial row of a database table or view.
- Use `%TYPE` to declare a record variable of the same type as a previously declared record variable.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***record_type_definition* ::=**



***field_definition* ::=**



(*datatype* ::= , *expression* ::=)

***record_variable_declaration* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*rowtype_attribute* ::=)

Semantics

record_type_definition

record_type

Name of the record type that you are defining.

field_definition

field

Name of the field that you are defining.

datatype

Data type of the field that you are defining.

NOT NULL

Imposes the `NOT NULL` constraint on the field that you are defining.

For information about this constraint, see "NOT NULL Constraint".

expression

Expression whose data type is compatible with *`datatype`*. When *`record_variable_declaration`* is elaborated, the value of *`expression`* is assigned to *`record.field`*. This value is the initial value of the field.

record_variable_declaration

record_1

Name of the record variable that you are declaring.

record_type

Name of a previously defined record type. *`record_type`* is the data type of *`record_1`*.

rowtype_attribute

See "%ROWTYPE Attribute".

record_2

Name of a previously declared record variable.

%TYPE

See "%TYPE Attribute".

Examples

- Example 6-41, "RECORD Type Definition and Variable Declaration"
- Example 6-42, "RECORD Type with RECORD Field (Nested Record)"
- Example 6-43, "RECORD Type with Varray Field"

Related Topics

In this chapter:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Collection Variable Declaration"
- "%ROWTYPE Attribute"

In other chapters:

- "Record Topics"

RESETTABLE Clause

The `RESETTABLE` clause is used to mark whether a PL/SQL unit's state can be discarded by the session when the unit deems it safe to do so.

If the state of a `RESETTABLE` PL/SQL unit is discarded, subsequent reference to the unit in the same session will result in the unit executing its initialization. The use of `RESETTABLE` can be beneficial to those who use SQL Patch by avoiding `ORA-04068`, an error raised when the existing state of a package has been discarded and can otherwise occur when packages change during datapatch.

The `RESETTABLE` clause can appear in the following statements:

- CREATE PACKAGE Statement
- CREATE PACKAGE BODY Statement

Topics

- Syntax
- Semantics
- Usage Notes
- Examples

Syntax

***resettable_clause* ::=**

Semantics

resettable_clause

RESETTABLE

A package or package body is resettable if the `RESETTABLE` clause appears in the package specification or the definition of the package body, respectively.

The `RESETTABLE` clause can be specified upon creation of a package and a package body. The clause is set independently on the package specification and body, meaning the property will not necessarily match. Any combination of settings between package specification and package body are valid.

In order to update the `RESETTABLE` property on a package, use the `CREATE OR REPLACE PACKAGE [BODY] RESETTABLE` syntax. The `ALTER PACKAGE [BODY]` syntax cannot be used to change the property.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The RESETTABLE clause cannot be used in combination with the SERIALLY_REUSABLE pragma.

Usage Notes

You must ensure that the state of the unit is, in fact, RESETTABLE when specifying the property. For example, in general, packages that contain instruments that need to follow an open-close mechanism (and they don't immediately complete the cycle) are not safe to mark RESETTABLE, as discarding the state before the mechanism is closed could cause a memory leak. On the other hand, packages that contain information that can be obtained again during reinstantiation are safe to mark as RESETTABLE.

If changes are made to a package that is marked RESETTABLE, you must consider if the change will mean the package is no longer resettable.

Examples

Example 14-36 Creating a RESETTABLE Package Body

```
CREATE OR REPLACE PACKAGE res_pkg RESETTABLE AS
    FUNCTION get_current_user
    RETURN VARCHAR2;
END;
/

CREATE OR REPLACE PACKAGE BODY res_pkg RESETTABLE AS

    NAME    VARCHAR2(50);
    ID      PLS_INTEGER;
    MAX_L CONSTANT PLS_INTEGER := ORA_MAX_NAME_LEN;

    FUNCTION get_current_user RETURN VARCHAR2
    IS
    BEGIN
        RETURN DBMS_ASSERT.enquote_name(SYS_CONTEXT('USERENV',
                                            'CURRENT_USER'), FALSE);
    END get_current_user;
END;
/
```

RESTRICT_REFERENCES Pragma

The RESTRICT_REFERENCES pragma asserts that a user-defined subprogram does not read or write database tables or package variables.

> **Note**
>
> The RESTRICT_REFERENCES pragma is deprecated. Oracle recommends using DETERMINISTIC and PARALLEL_ENABLE instead of RESTRICT_REFERENCES.

Subprograms that read or write database tables or package variables are difficult to optimize, because any invocation of the subprogram might produce different results or encounter errors. If a statement in a user-defined subprogram violates an assertion made by

Copyright © 1996, 2025, Oracle and/or its affiliates.

RESTRICT_REFERENCES, then the PL/SQL compiler issues an error message when it parses that statement, unless you specify TRUST.

Typically, this pragma is specified for functions. If a function invokes procedures, then specify this pragma for those procedures also.

Restrictions on RESTRICT_REFERENCES Pragma

- This pragma can appear only in a package specification or ADT specification.
- Only one RESTRICT_REFERENCES pragma can reference a given subprogram.

Topics

- Syntax
- Semantics

Syntax

***restrict_references_pragma* ::=**

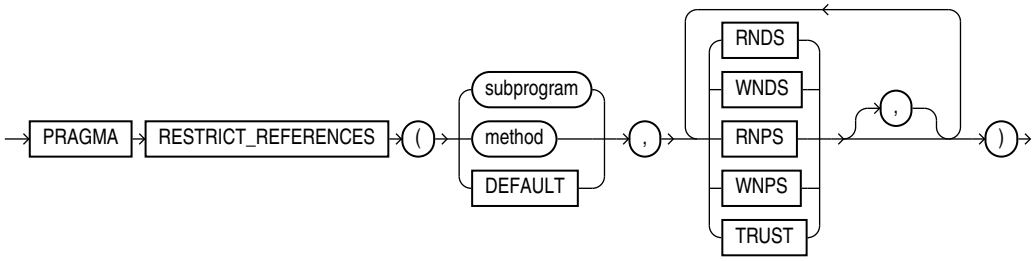

Semantics

subprogram

Name of a user-defined subprogram, typically a function. If *subprogram* is overloaded, the pragma applies only to the most recent subprogram declaration.

method

Name of a MEMBER subprogram. See "CREATE TYPE Statement"for more information.

DEFAULT

Applies the pragma to all subprograms in the package specification or ADT specification (including the system-defined constructor for ADTs).

If you also declare the pragma for an individual subprogram, it overrides the DEFAULT pragma for that subprogram.

RNDS

Asserts that the subprogram reads no database state (does not query database tables).

WNDS

Asserts that the subprogram writes no database state (does not modify tables).

RNPS

Copyright © 1996, 2025, Oracle and/or its affiliates.

Asserts that the subprogram reads no package state (does not reference the values of package variables)

Restriction on RNPS

You cannot specify `RNPS` if the subprogram invokes the `SQLCODE` or `SQLERRM` function.

WNPS

Asserts that the subprogram writes no package state (does not change the values of package variables).

Restriction on WNPS

You cannot specify `WNPS` if the subprogram invokes the `SQLCODE` or `SQLERRM` function.

TRUST

Asserts that the subprogram can be trusted not to violate the other specified assertions and prevents the PL/SQL compiler from checking the subprogram body for violations. Skipping these checks can improve performance.

If your PL/SQL subprogram invokes a C or Java subprogram, then you must specify `TRUST` for either the PL/SQL subprogram or the C or Java subprogram, because the PL/SQL compiler cannot check a C or Java subprogram for violations at run time.

> **Note**
>
> To invoke a subprogram from a parallelized DML statement, you must specify all four constraints—`RNDS`, `WNDS`, `RNPS`, and `WNPS`. No constraint implies another.

> **See Also**
>
> *Oracle Database Development Guide* for information about using `PRAGMA RESTRICT_REFERENCES` in existing applications

RESULT_CACHE Clause

Indicates to store the function results into the server result cache.

The `RESULT_CACHE` clause can appear in the following SQL statements:

- CREATE FUNCTION Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***result_cache_clause* ::=**

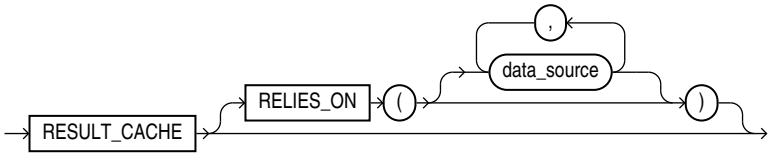

Semantics

result_cache_clause

result_cache_clause can appear only once in the function.

RESULT_CACHE

To make a function result-cached, include the RESULT_CACHE clause in the function definition. If you declare the function before defining it, you must also include the RESULT_CACHE option in the function declaration.

Restriction on RESULT_CACHE

- `RESULT_CACHE` is disallowed on functions with `OUT` or `IN OUT` parameters.
- `RESULT_CACHE` is disallowed on functions with `IN` or `RETURN` parameter of (or containing) these types:
  - `BLOB`
  - `CLOB`
  - `NCLOB`
  - `REF CURSOR`
  - Collection
  - Object
  - Record or PL/SQL collection that contains an unsupported return type
- `RESULT_CACHE` is disallowed on function in an anonymous block.
- `RESULT_CACHE` is disallowed on pipelined table function, nested function and SQL macro.

RELIES_ON

Specifies the data sources on which the results of the function depend. Each *`data_source`* is the name of either a database table or view.

> **Note**
>
> - This clause is deprecated. As of Oracle Database 12c, the database detects all data sources that are queried while a result-cached function is running, and `RELIES_ON` clause does nothing.
> - You cannot use `RELIES_ON` clause in a function declared in an anonymous block.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

- Examples of Result-Cached Functions

Related Topics

In this chapter:

- Function Declaration and Definition

In other chapters:

- PL/SQL Function Result Cache

In other books:

- *Oracle Database Performance Tuning Guide*

RETURN Statement

The `RETURN` statement immediately ends the execution of the subprogram or anonymous block that contains it.

In a function, the `RETURN` statement assigns a specified value to the function identifier and returns control to the invoker, where execution resumes immediately after the invocation (possibly inside the invoking statement). Every execution path in a function must lead to a `RETURN` statement (otherwise, the PL/SQL compiler issues compile-time warning PLW-05005).

In a procedure, the `RETURN` statement returns control to the invoker, where execution resumes immediately after the invocation.

In an anonymous block, the `RETURN` statement exits its own block and all enclosing blocks.

A subprogram or anonymous block can contain multiple `RETURN` statements.

> **Note**
>
> The `RETURN` statement differs from the `RETURN` clause in a function heading, which specifies the data type of the return value.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***return_statement* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*expression* ::=)

Semantics

expression

Optional when the `RETURN` statement is in a pipelined table function. Required when the `RETURN` statement is in any other function. Not allowed when the `RETURN` statement is in a procedure or anonymous block.

The `RETURN` statement assigns the value of *`expression`* to the function identifier. Therefore, the data type of *`expression`* must be compatible with the data type in the `RETURN` clause of the function. For information about expressions, see "Expression".

Examples

- Example 9-3, "Execution Resumes After RETURN Statement in Function"
- Example 9-4, "Function Where Not Every Execution Path Leads to RETURN Statement"
- Example 9-5, "Function Where Every Execution Path Leads to RETURN Statement"
- Example 9-6, "Execution Resumes After RETURN Statement in Procedure"
- Example 9-7, "Execution Resumes After RETURN Statement in Anonymous Block"

Related Topics

In this chapter:

- "Block"
- "Function Declaration and Definition"
- "Procedure Declaration and Definition"

In other chapters:

- "RETURN Statement"

RETURNING INTO Clause

The `RETURNING INTO` clause specifies the variables in which to store the values returned by the statement to which the clause belongs.

The variables can be either individual variables or collections. If the statement affects no rows, then the values of the variables are undefined.

The **static** `RETURNING INTO` clause belongs to a `DELETE`, `INSERT`, `UPDATE`, or `MERGE` statement. The **dynamic** `RETURNING INTO` clause belongs to the `EXECUTE IMMEDIATE` statement.

> **Note**
>
> You cannot use the `RETURNING INTO` clause for remote or parallel deletes.

Topics

- Syntax
- Semantics

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Examples
- Related Topics

Syntax

***static_returning_clause* ::=**

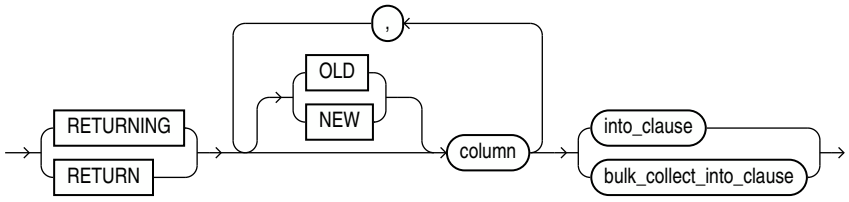

***dynamic_returning_clause* ::=**



***into_clause* ::=**



***bulk_collect_into_clause* ::=**



Semantics

static_returning_clause

OLD | NEW

Given columns `c1` and `c2` in a table, you can specify `OLD` for column `c1` (for example `OLD c1`). You can also specify `OLD` for a column referenced by a column expression (for example `c1+OLD c2`) or on a column referenced by an aggregate function (for example `AVG(OLD c1)`). When `OLD` is specified for a column, the column value before the execution of an associated `INSERT`, `UPDATE`, `MERGE`, or `DELETE` statement is returned. In the case of a column referenced by a column expression, what is returned is the result from evaluating the column expression using the column value before the DML statement is executed.

Copyright © 1996, 2025, Oracle and/or its affiliates.

`NEW` can be explicitly specified for a column, a column referenced in an expression, or a column referenced by an aggregate function to return a column value after the `INSERT`, `UPDATE`, `MERGE`, or `DELETE` statement, or an expression result that uses the after execution value of a column.

When `OLD` and `NEW` are both omitted for a column or an expression, the post DML execution column value (pre-execution value for `DELETE`), or the expression result computed using the column values after DML execution, is returned.

Note that it is valid to specify `OLD` and `NEW` on constants (for example, `OLD 1`), however, the keywords are ignored. `OLD` and `NEW` are not currently supported on virtual columns.

> **Note**
>
> While `UPDATE` statements have both before and after update column values, `INSERT` statements have no `OLD` column value and `DELETE` statements have no `NEW` column value. Although using `OLD` and `NEW` in these cases is valid, nothing is returned.

column

Expression whose value is the name of a column of a database table.

into_clause

Specifies the variables or record in which to store the column values that the statement returns.

Restriction on *into_clause*

Use *`into_clause`* in *`dynamic_returning_clause`* if and only if *`dynamic_sql_stmt`* (which appears in "EXECUTE IMMEDIATE Statement") returns a single row.

record

The name of a record variable in which to store the row that the statement returns. For each *select_list* item in the statement, the record must have a corresponding, type-compatible field.

variable

Either the name of a scalar variable in which to store a column that the statement returns or the name of a host cursor variable that is declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Each *select_list* item in the statement must have a corresponding, type-compatible variable. The data type of a host cursor variable is compatible with the return type of any PL/SQL cursor variable.

bulk_collect_into_clause

Specifies one or more existing collections or host arrays in which to store the rows that the statement returns. For each *select_list* item in the statement, *`bulk_collect_into_clause`* must have a corresponding, type-compatible *`collection`* or *`host_array`*.

For the reason to use this clause, see "Bulk SQL and Bulk Binding".

Restrictions on *bulk_collect_into_clause*

- Use the *`bulk_collect_into_clause`* clause in *`dynamic_returning_clause`* if and only if *`dynamic_sql_stmt`* (which appears in "EXECUTE IMMEDIATE Statement") can return multiple rows.
- You cannot use *`bulk_collect_into_clause`* in client programs.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- When the statement that includes *bulk_collect_into_clause* requires implicit data type conversions, *bulk_collect_into_clause* can have only one *collection* or *host_array*.

collection

Name of a collection variable in which to store the rows that the statement returns.

Restrictions on *collection*

- *collection* cannot be the name of an associative array that is indexed by a string.
- When the statement requires implicit data type conversions, *collection* cannot be the name of a collection of a composite type.

:host_array

Name of an array declared in a PL/SQL host environment and passed to PL/SQL as a bind variable. Do not put space between the colon (:) and *host_array*.

Examples

- Example 6-58, "UPDATE Statement Assigns Values to Record Variable"
- Example 7-1, "Static SQL Statements"
- Example 13-25, "Returning Deleted Rows in Two Nested Tables"
- Example 13-26, "Returning NEW and OLD Values of Updated Rows"
- Example 13-27, "DELETE with RETURN BULK COLLECT INTO in FORALL Statement"

Related Topics

In this chapter:

- "DELETE Statement Extension"
- "EXECUTE IMMEDIATE Statement"
- "FETCH Statement"
- "SELECT INTO Statement"
- "UPDATE Statement Extensions"

In other chapters:

- "Using SQL Statements to Return Rows in PL/SQL Record Variables"
- "EXECUTE IMMEDIATE Statement"
- "RETURNING INTO Clause with BULK COLLECT Clause"

%ROWTYPE Attribute

The %ROWTYPE attribute lets you declare a record that represents either a full or partial row of a database table or view.

For every visible column of the full or partial row, the record has a field with the same name and data type. If the structure of the row changes, then the structure of the record changes accordingly. Making an invisible column visible changes the structure of some records declared with the %ROWTYPE attribute.

The record fields do not inherit the constraints or initial values of the corresponding columns.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The `%ROWTYPE` attribute cannot be used if the referenced character column has a collation other than `USING_NLS_COMP`.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***rowtype_attribute* ::=**



Semantics

rowtype_attribute

explicit_cursor_name

Name of an explicit cursor. For every column selected by the query associated with *`explicit_cursor_name`*, the record has a field with the same name and data type.

cursor_variable_name

Name of a strong cursor variable. For every column selected by the query associated with *`cursor_variable_name`*, the record has a field with the same name and data type.

db_table_or_view_name

Name of a database table or view that is accessible when the declaration is elaborated. For every column of *`db_table_or_view_name`*, the record has a field with the same name and data type.

Examples

- Example 6-45, "%ROWTYPE Variable Represents Full Database Table Row"
- Example 6-46, "%ROWTYPE Variable Does Not Inherit Initial Values or Constraints"
- Example 6-47, "%ROWTYPE Variable Represents Partial Database Table Row"
- Example 6-48, "%ROWTYPE Variable Represents Join Row"
- Example 6-51, "%ROWTYPE Affected by Making Invisible Column Visible"
- Example 6-54, "Assigning %ROWTYPE Record to RECORD Type Record"

Related Topics

In this chapter:

- "Cursor Variable Declaration"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "Explicit Cursor Declaration and Definition"
- "Record Variable Declaration"
- "%TYPE Attribute"

In other chapters:

- About Data-Bound Collation
- "Declaring Items using the %ROWTYPE Attribute"
- "%ROWTYPE Attribute and Invisible Columns"

Scalar Variable Declaration

A scalar variable stores a value with no internal components. The value can change. A scalar variable declaration specifies the name and data type of the variable and allocates storage for it.

The declaration can also assign an initial value and impose the `NOT NULL` constraint.

You reference a scalar variable by its name.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***variable_declaration* ::=**



(*expression* ::=)

Semantics

variable_declaration

variable

Name of the variable that you are declaring.

datatype

Name of a scalar data type, including any qualifiers for size, precision, and character or byte semantics.

For information about scalar data types, see "PL/SQL Data Types".

NOT NULL

Copyright © 1996, 2025, Oracle and/or its affiliates.

Imposes the `NOT NULL` constraint on the variable. For information about this constraint, see "NOT NULL Constraint".

expression

Value to be assigned to the variable when the declaration is elaborated. *`expression`* and *`variable`* must have compatible data types.

Examples

- Example 3-11, "Scalar Variable Declarations"
- Example 3-13, "Variable and Constant Declarations with Initial Values"
- Example 3-14, "Variable Initialized to NULL by Default"
- Example 3-9, "Variable Declaration with NOT NULL Constraint"

Related Topics

In this chapter:

- "Assignment Statement"
- "Collection Variable Declaration"
- "Constant Declaration"
- "Expression"
- "Record Variable Declaration"
- "%ROWTYPE Attribute"
- "%TYPE Attribute"

In other chapters:

- "Declaring Variables"
- "PL/SQL Data Types"

SELECT INTO Statement

The `SELECT INTO` statement retrieves values from one or more database tables (as the SQL `SELECT` statement does) and stores them in variables (which the SQL `SELECT` statement does not do).

> ⚠ **Caution**
>
> The `SELECT INTO` statement with the `BULK COLLECT` clause is vulnerable to aliasing, which can cause unexpected results. For details, see "SELECT BULK COLLECT INTO Statements and Aliasing".

> ⓘ **See Also**
>
> *Oracle Database SQL Language Reference* for the syntax of the SQL `SELECT` statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***select_into_statement* ::=**

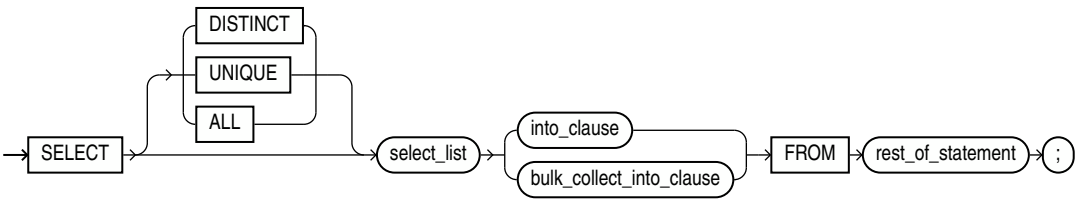

(*bulk_collect_into_clause* ::=, *into_clause* ::=, *Oracle Database SQL Language Reference* for *select_list* syntax)

Semantics

select_into_statement

DISTINCT | UNIQUE

Specify `DISTINCT` or `UNIQUE` if you want the database to return only one copy of each set of duplicate rows selected. These two keywords are synonymous. Duplicate rows are those with matching values for each expression in the select list.

Restrictions on DISTINCT and UNIQUE Queries

- The total number of bytes in all select list expressions is limited to the size of a data block minus some overhead. This size is specified by the initialization parameter `DB_BLOCK_SIZE`.
- You cannot specify `DISTINCT` if the *select_list* contains LOB columns.

ALL

(Default) Causes the database to return all rows selected, including all copies of duplicates.

select_list

If the `SELECT INTO` statement returns no rows, PL/SQL raises the predefined exception `NO_DATA_FOUND`. To guard against this exception, select the result of the aggregate function `COUNT(*)`, which returns a single value even if no rows match the condition.

into_clause

With this clause, the `SELECT INTO` statement retrieves one or more columns from a single row and stores them in either one or more scalar variables or one record variable. For more information, see "*into_clause* ::=".

Copyright © 1996, 2025, Oracle and/or its affiliates.

bulk_collect_into_clause

With this clause, the `SELECT INTO` statement retrieves an entire result set and stores it in one or more collection variables. For more information, see "*bulk_collect_into_clause ::=*".

rest_of_statement

Anything that can follow the keyword `FROM` in a SQL `SELECT` statement, described in *Oracle Database SQL Language Reference*.

Examples

- Example 3-25, "Assigning Value to Variable with SELECT INTO Statement"
- Example 6-56, "SELECT INTO Assigns Values to Record Variable"
- Example 7-37, "ROLLBACK Statement"
- Example 7-38, "SAVEPOINT and ROLLBACK Statements"
- Example 7-43, "Declaring Autonomous Function in Package"
- Example 8-20, "Validation Checks Guarding Against SQL Injection"
- Example 13-16, "Bulk-Selecting Two Database Columns into Two Nested Tables"
- Example 13-17, "Bulk-Selecting into Nested Table of Records"
- Example 13-21, "Limiting Bulk Selection with ROWNUM, SAMPLE, and FETCH FIRST"

Related Topics

In this chapter:

- "Assignment Statement"
- "FETCH Statement"
- "%ROWTYPE Attribute"

In other chapters:

- "Assigning Values to Variables with the SELECT INTO Statement"
- "Using SELECT INTO to Assign a Row to a Record Variable"
- "Processing Query Result Sets With SELECT INTO Statements"
- "SELECT INTO Statement with BULK COLLECT Clause"

See Also

Oracle Database SQL Language Reference for information about the SQL `SELECT` statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

SERIALLY_REUSABLE Pragma

The `SERIALLY_REUSABLE` pragma specifies that the package state is needed for only one call to the server (for example, an OCI call to the database or a stored procedure invocation through a database link).

After this call, the storage for the package variables can be reused, reducing the memory overhead for long-running sessions.

This pragma is appropriate for packages that declare large temporary work areas that are used once in the same session.

The `SERIALLY_REUSABLE` pragma can appear in the *`declare_section`* of the specification of a bodiless package, or in both the specification and body of a package, but not in only the body of a package.

Topics

- Syntax
- Examples
- Related Topics

Syntax

***serially_reusable_pragma* ::=**

Examples

- Example 11-4, "Creating SERIALLY_REUSABLE Packages"
- Example 11-5, "Effect of SERIALLY_REUSABLE Pragma"
- Example 11-6, "Cursor in SERIALLY_REUSABLE Package Open at Call Boundary"

Related Topics

- "SERIALLY_REUSABLE Packages"
- "Pragmas"

SHARD_ENABLE Clause

The `SHARD_ENABLE` keyword indicates that a query referencing the defined function can be pushed down into the shards of a sharded database (SDB).

When using the `SHARD_ENABLE` clause, the query optimizer takes the initiative to push the execution of the PL/SQL function to the shards.

The `SHARD_ENABLE` clause can appear in the following SQL statement:

- CREATE FUNCTION Statement
- CREATE PACKAGE Statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

Queries with PL/SQL functions created **with** the `SHARD_ENABLE` keyword will be pushed down, if possible, to the shards and executed as multishard queries. *If possible* refers to the fact that there may be other parts of the query that do not allow the pushdown. Therefore, the optimizer will make the pushdown decision.

Queries with PL/SQL functions created **without** the `SHARD_ENABLE` keyword will not be pushed down to the shards and executed as cross shard queries on the coordinator.

Topics

- Syntax
- Semantics
- Usage Notes
- Related Topics

Syntax

***shard_enable_clause* ::=**

Semantics

shard_enable_clause

Usage Notes

It is up to you to decide whether a function execution can be pushed to the shards. However, there are some instances where you should decide not to use `shard_enable`:

- Functions referencing any session context variables that may be different on the shards and coordinator.
- Functions referencing any global variables that may be different on the shards and coordinator.
- Functions referencing any data local to the coordinator.

In some cases you may decide it is safe to push a function, even if it references a package global variable or reads data from a table.

Even if a PL/SQL function is marked with `SHARD_ENABLE` clause, there are times when the evaluation needs to happen on the coordinator, meaning the function evaluation is not pushed to shards. Possible scenarios include:

- When the function is in `SELECT` list and there is a join between sharded tables and the join is not on a sharding key (note that a join between sharded and duplicated key is okay),
- When the function is in `SELECT` list and there is a join with a local (non-sharded) table,
- If such a function is present in `WHERE` clause and it takes input parameters as column of multiple sharded tables and there is no join on sharding key.

Pushing eligible functions down to shards to execute as multi shard queries rather than cross shard queries can result in significant performance improvement by:

- Distributing the computation by performing evaluation of PL/SQL functions on each shard.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Reducing the size of the data returned from shards when the predicate involves a PL/SQL function, resulting in smaller inputs for joins on the coordinator.

Related Topics

In other books:

- *Oracle Globally Distributed Database Guide* for more information about sharding in the Oracle Database

SHARING Clause

The `SHARING` clause applies only when creating an object in an application root in the context of an application maintenance. This type of object is called an application common object and it can be shared with the application PDBs that belong to the application root.

The `SHARING` clause can appear in the context of creating application common PL/SQL and SQL objects with these SQL statements.

Table 14-2 Summary of Possible Sharing Attributes by Application Common Object Type

Application Common Object Statement	Possible SHARING Attributes	Syntax and Semantics
CREATE ANALYTIC VIEW	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE ATTRIBUTE DIMENSION	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE CLUSTER	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE CONTEXT	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE DIRECTORY	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE FUNCTION	METADATA, NONE	CREATE FUNCTION Statement
CREATE HIERARCHY	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE INDEXTYPE	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE JAVA	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE LIBRARY	METADATA, NONE	CREATE LIBRARY Statement
CREATE MATERIALIZED VIEW LOG	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE OPERATOR	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE PROCEDURE	METADATA, NONE	CREATE PROCEDURE Statement
CREATE PACKAGE	METADATA, NONE	CREATE PACKAGE Statement
CREATE PACKAGE BODY	METADATA, NONE	CREATE PACKAGE BODY Statement
CREATE SEQUENCE	METADATA, DATA, NONE	*Oracle Database SQL Language Reference*

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table 14-2 (Cont.) Summary of Possible Sharing Attributes by Application Common Object Type

Application Common Object Statement	Possible SHARING Attributes	Syntax and Semantics
CREATE SYNONYM	METADATA, NONE	*Oracle Database SQL Language Reference*
CREATE TABLE	METADATA, DATA, EXTENDED DATA, NONE	*Oracle Database SQL Language Reference*
CREATE TRIGGER	METADATA, NONE	CREATE TRIGGER Statement
CREATE TYPE	METADATA, NONE	CREATE TYPE Statement
CREATE TYPE BODY	METADATA, NONE	CREATE TYPE BODY Statement
CREATE VIEW	METADATA, DATA, EXTENDED DATA, NONE	*Oracle Database SQL Language Reference*

Topics

- Syntax
- Semantics
- Related Topics

Syntax

***sharing_clause* ::=**



Semantics

sharing_clause

Specifies how the object is shared using one of the following sharing attributes:

- **`METADATA`** - A metadata link shares the metadata, but its data is unique to each container. This type of object is referred to as a **metadata-linked application common object**.
- **`NONE`** - The object is not shared and can only be accessed in the application root.

If you omit this clause during an application operation, then the database uses the value of the `DEFAULT_SHARING` initialization parameter to determine the sharing attribute of the object. If the `DEFAULT_SHARING` initialization parameter does not have a value, then the default is `METADATA`.

Restrictions on `SHARING` clause

The sharing clause may only appear during an application installation, upgrade or patch in an application root. You must issue an `ALTER PLUGGABLE DATABASE APPLICATION ... BEGIN` statement to start the operation and an `ALTER PLUGGABLE DATABASE APPLICATION ... END` statement to end the operation. The *sharing_clause* is illegal outside this context and this implies the object is not shared.

You cannot change the sharing attribute of an object after it is created.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Generally, common objects cannot depend on local objects. The exceptions to this rule are :

- the common object being created is a synonym
- the common object being created depends on a local operator

If you try to create a common object that depends on local objects other than these two exceptions, it will result in the creation of a local object.

Related Topics

In other books:

- *Oracle Database Concepts* for more information about application maintenance
- *Oracle Database Concepts* for an example of patching an application using the automated technique
- *Oracle Database Reference* for more information on the `DEFAULT_SHARING` initialization parameter
- *Oracle Database Reference* for more information on the `ALL_OBJECTS` view initialization `SHARING` and `APPLICATION` columns
- *Oracle Database Administrator's Guide* for complete information on creating application common objects

SQL_MACRO Clause

The `SQL_MACRO` clause marks a function as a SQL macro which can be used as either a scalar expression or a table expression.

A `TABLE` macro is a function annotated as a `SQL_MACRO` and defined as a `TABLE` type.

A `SCALAR` macro is a function annotated as a `SQL_MACRO` and defined as a `SCALAR` type.

A SQL macro referenced in a view is always processed with the view owner's privileges.

The `AUTHID` property cannot be specified. When a SQL macro is invoked, the function body executes with definer's rights to construct the text to return. The resulting expression is evaluated with invoker's rights. The SQL macro owner must grant inherit privileges to the invoking function.

When a macro annotated function is used in PL/SQL, it works like a regular function returning character or `CLOB` type with no macro expansion.

Many `SCALAR` macros can instead be written as standard PL/SQL functions, which can be called directly from a SQL statement. The PL/SQL function is automatically converted into a semantically equivalent SQL expression by the SQL Transpiler. This converted SQL expression is used during execution, replacing the call to the original PL/SQL function.

Transpilation can improve performance by removing the need to switch between the SQL runtime and the PL/SQL runtime. Where possible, transpilation is performed automatically on any PL/SQL function called from a SQL statement (unless the feature has been explicitly disabled).

For more information about the SQL Transpiler, see *Oracle AI Database SQL Tuning Guide*.

The SQL_MACRO annotation can appear in the following SQL statement:

- CREATE FUNCTION Statement

SQL Macro Usage Restrictions:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- A `TABLE` macro can only appear in `FROM` clause of a query table expression.
- A `SCALAR` macro cannot appear in `FROM` clause of a query table expression. It can appear wherever PL/SQL functions are allowed, for example in the select list, the `WHERE` clause, and the `ORDER BY` clause.
- A scalar macro cannot have table arguments.
- A SQL macro cannot appear in a virtual column expression, functional index, editioning view or materialized view.
- Type methods cannot be annotated with `SQL_MACRO`.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***sql_macro_clause* ::=**



Semantics

sql_macro_clause

The *sql_macro_clause* can appear only once in the function. To make a SQL macro function, include the *sql_macro_clause* in the function definition. If you declare the SQL macro function before defining it, you must specify the *sql_macro_clause* in the function declaration.

If `SCALAR` or `TABLE` is not specified, `TABLE` is the default.

SCALAR

Specify `SCALAR` if the macro function can be used in scalar expressions.

TABLE (Default)

Specify `TABLE` if the macro function can be used in table expressions.

Restrictions on *sql_macro_clause*

The `SQL_MACRO` annotation is disallowed with `RESULT_CACHE`, `PARALLEL_ENABLE`, and `PIPELINED`. Although the `DETERMINISTIC` property cannot be specified, a SQL macro is always implicitly deterministic.

The SQL macro function must have a return type of `VARCHAR2`, `CHAR`, or `CLOB`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

Example 14-37 Emp_doc: Using a Scalar Macro to Convert Columns into a JSON or XML Document

The emp_doc SQL macro converts employee fields into a document string (JSON or XML).

```
The macro is implemented as a tree of nested macros with the following call graph
structure.
emp_doc()
   ==> emp_json()
          ==> name_string()
          ==> email_string()
                ==> name_string()
          ==> date_string()
   ==> emp_xml
          ==> name_string()
          ==> email_string()
                ==> name_string()
          ==> date_string()
```

The date_string function converts a date in a string formatted as a four digits year, month (01-12) and day of the month (1-31).

```
CREATE FUNCTION date_string(dat DATE)
                    RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
              TO_CHAR(dat, 'YYYY-MM-DD')
          }';
END;
/
```

The name_string function sets the first letter of each words in the first_name and last_name in uppercase and all other letters in lowercase. It concatenates the formatted first name with a space and the formatted last name, and removes leading and trailing spaces from the resulting string.

```
CREATE FUNCTION name_string(first_name VARCHAR2,
                                  last_name VARCHAR2)
                     RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
          TRIM(INITCAP(first_name) || ' ' || INITCAP(last_name))
          }';
END;
/
```

The email_string sets the email address using the name_string function with the first_name and last_name and replacing all spaces with a period, and appending a default domain name of example.com.

```
CREATE FUNCTION email_string(first_name VARCHAR2,
                                   last_name VARCHAR2,
                                   host_name VARCHAR2 DEFAULT 'example.com')
                     RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
          REPLACE(LOWER(name_string(first_name, last_name)),' ','.') || '@' || host_name
          }';
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The emp_json SQL macro returns a JSON document string.

```
CREATE FUNCTION emp_json(first_name VARCHAR2 DEFAULT NULL,
                         last_name VARCHAR2 DEFAULT NULL,
                         hire_date DATE DEFAULT NULL,
                         phone_num VARCHAR2 DEFAULT NULL)
                  RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
          JSON_OBJECT(
             'name'      : name_string(first_name, last_name),
             'email'     : email_string(first_name, last_name),
             'phone'     : phone_num,
             'hire_date' : date_string(hire_date)
             ABSENT ON NULL)
          }';
END;
/
```

The emp_xml SQL macro returns an XML document string.

```
CREATE FUNCTION emp_xml(first_name VARCHAR2 DEFAULT NULL,
                        last_name VARCHAR2 DEFAULT NULL,
                        hire_date DATE DEFAULT NULL,
                        phone_num VARCHAR2 DEFAULT NULL)
                  RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
       XMLELEMENT("xml",
                  CASE WHEN first_name || last_name IS NOT NULL THEN
                     XMLELEMENT("name", name_string(first_name, last_name))
                  END,
                  CASE WHEN first_name || last_name IS NOT NULL THEN
                     XMLELEMENT("email", email_string(first_name, last_name))
                  END,
                  CASE WHEN hire_date IS NOT NULL THEN
                     XMLELEMENT("hire_date", date_string(hire_date))
                  END,
                  CASE WHEN phone_num IS NOT NULL THEN
                     XMLELEMENT("phone", phone_num)
                  END)
           }';
END;
/
```

The emp_doc SQL macro returns employee fields into a JSON (default) or XML document string.

```
CREATE FUNCTION emp_doc(first_name VARCHAR2 DEFAULT NULL,
                        last_name VARCHAR2 DEFAULT NULL,
                        hire_date DATE DEFAULT NULL,
                        phone_num VARCHAR2 DEFAULT NULL,
                        doc_type VARCHAR2 DEFAULT 'json')
                  RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
BEGIN
   RETURN q'{
     DECODE(LOWER(doc_type),
            'json', emp_json(first_name, last_name, hire_date, phone_num),
            'xml', emp_xml(first_name, last_name, hire_date, phone_num))
         }';
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

This query shows the emp_doc SQL macro used in a scalar expression to list all employees in a JSON document string in department 30.

```
SELECT department_id,
           emp_doc(first_name => e.first_name, hire_date => e.hire_date) doc
FROM hr.employees e
WHERE department_id = 30
ORDER BY last_name;
```

Result:

```
     30
{"name":"Shelli","email":"shelli@example.com","hire_date":"2015-12-24"}
     30 {"name":"Karen","email":"karen@example.com","hire_date":"2017-08-10"}
     30 {"name":"Guy","email":"guy@example.com","hire_date":"2016-11-15"}
     30
{"name":"Alexander","email":"alexander@example.com","hire_date":"2013-05-18"}
     30 {"name":"Den","email":"den@example.com","hire_date":"2012-12-07"}
     30 {"name":"Sigal","email":"sigal@example.com","hire_date":"2015-07-24"}
```

This query shows the emp_doc SQL macro used in a scalar expression to list all employees in a XML document string.

```
SELECT deptno,
           emp_doc(first_name => ename, hire_date => hiredate, doc_type => 'xml') doc
FROM scott.emp
ORDER BY ename;
```

Result:

```
20 <xml><name>Adams</name><email>adams@example.com</email><hire_date>1987-05-23</
hire_date></xml>
30 <xml><name>Allen</name><email>allen@example.com</email><hire_date>1981-02-20</
hire_date></xml>
30 <xml><name>Blake</name><email>blake@example.com</email><hire_date>1981-05-01</
hire_date></xml>
10 <xml><name>Clark</name><email>clark@example.com</email><hire_date>1981-06-09</
hire_date></xml>
20 <xml><name>Ford</name><email>ford@example.com</email><hire_date>1981-12-03</
hire_date></xml>
...
30 <xml><name>Ward</name><email>ward@example.com</email><hire_date>1981-02-22</
hire_date></xml>
```

```
VARIABLE surname VARCHAR2(100)
EXEC :surname := 'ellison'
WITH e AS (SELECT emp.*, :surname lname FROM emp WHERE deptno IN (10,20))
SELECT deptno,
       emp_doc(first_name => ename, last_name => lname, hire_date => hiredate) doc
FROM e
ORDER BY ename;
```

Result:

```
10 {"name":"Clark Ellison","email":"clark.ellison@example.com","hire_date":"1981-06-09"}
20 {"name":"Ford Ellison","email":"ford.ellison@example.com","hire_date":"1981-12-03"}
20 {"name":"Jones Ellison","email":"jones.ellison@example.com","hire_date":"1981-04-02"}
10 {"name":"King Ellison","email":"king.ellison@example.com","hire_date":"1981-11-17"}
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
10 {"name":"Miller
Ellison","email":"miller.ellison@example.com","hire_date":"1982-01-23"}
20 {"name":"Scott Ellison","email":"scott.ellison@example.com","hire_date":"1987-04-19"}
20 {"name":"Smith Ellison","email":"smith.ellison@example.com","hire_date":"1980-12-17"}
```

Example 14-38 Env: Using a Scalar Macro in a Scalar Expression

The env SQL macro provides a wrapper for the value of the parameter associated with the context namespace USERENV which describes the current session.

```
CREATE PACKAGE env AS
   FUNCTION current_user RETURN VARCHAR2 SQL_MACRO(SCALAR);
   FUNCTION current_edition_name RETURN VARCHAR2 SQL_MACRO(SCALAR);
   FUNCTION module RETURN VARCHAR2 SQL_MACRO(SCALAR);
   FUNCTION action RETURN VARCHAR2 SQL_MACRO(SCALAR);
END;
/
CREATE PACKAGE BODY env AS
   FUNCTION current_user RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
     BEGIN
        RETURN q'{SYS_CONTEXT('userenv','SESSION_USER')}';
     END;
   FUNCTION current_edition_name RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
     BEGIN
        RETURN q'{SYS_CONTEXT('userenv','CURRENT_EDITION_NAME')}';
     END;
   FUNCTION module RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
     BEGIN
        RETURN q'{SYS_CONTEXT('userenv','MODULE')}';
     END;
   FUNCTION action RETURN VARCHAR2 SQL_MACRO(SCALAR) IS
     BEGIN
        RETURN q'{SYS_CONTEXT('userenv','ACTION')}';
     END;
END;
/
```

Select the current user info.

```
SELECT env.current_user, env.module, env.action FROM DUAL;
```

Result:

```
SCOTT   SQL*PLUS
```

Example 14-39 Budget : Using a Table Macro in a Table Expression

This example shows the SQL macro named budget used in a table expression to return the total salary in each department for employees for a given job title.

```
CREATE FUNCTION budget(job VARCHAR2) RETURN VARCHAR2 SQL_MACRO IS
BEGIN
   RETURN q'{SELECT deptno, SUM(sal) budget
              FROM scott.emp
              WHERE job = budget.job
              GROUP BY deptno}';
END;
```

This query shows the SQL macro budget used in a table expression.

```
SELECT * FROM budget('MANAGER');
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
DEPTNO     BUDGET
---------- ----------
        20       2975
        30       2850
        10       2450
```

Example 14-40 Take: Using a Table Macro with a Polymorphic View

This example creates a table macro named take which returns the first n rows from table t.

```
CREATE FUNCTION take (n NUMBER, t DBMS_TF.table_t)
                     RETURN VARCHAR2 SQL_MACRO IS
BEGIN
   RETURN 'SELECT * FROM t FETCH FIRST take.n ROWS ONLY';
END;
/
```

The query returns the first two rows from table dept.

```
SELECT * FROM take(2, dept);
```

Result:

```
    DEPTNO DNAME          LOC
---------- -------------- -------------
        10 ACCOUNTING     NEW YORK
        20 RESEARCH       DALLAS
```

```
VAR row_count NUMBER
EXEC :row_count := 5

WITH t AS (SELECT * FROM emp NATURAL JOIN dept ORDER BY ename)
SELECT ename, dname FROM take(:row_count, t);
```

Result:

```
ENAME      DNAME
---------- --------------
ADAMS      RESEARCH
ALLEN      SALES
BLAKE      SALES
CLARK      ACCOUNTING
FORD       RESEARCH
```

Example 14-41 Range : Using a Table Macro in a Table Expression

This example creates a SQL macro that generates an arithmetic progression of rows in the range [first, stop]. The first row start with the value *first*, and each subsequent row's value will be *step* more than the previous row's value.

The following combination of arguments will produce zero rows:

- step < 0 and first < stop
- step = 0
- step > 0 and first > stop

```
/*  PACKAGE NAME: GEN
 *  SQL TABLE MACROS:
 *     range(stop  : number to generate starting from zero)
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
 *     range(first : starting number of the sequence (default=0),
 *           stop  : generate numbers up to, but not including this number,
 *           step  : difference between each number in the sequence (default=1) )
*/
CREATE PACKAGE gen IS
   FUNCTION range(stop NUMBER)
            RETURN VARCHAR2 SQL_MACRO(TABLE);

   FUNCTION range(first NUMBER DEFAULT 0, stop NUMBER, step NUMBER DEFAULT 1)
            RETURN VARCHAR2 SQL_MACRO(TABLE);

   FUNCTION tab(tab TABLE, replication_factor NATURAL)
            RETURN TABLE PIPELINED ROW POLYMORPHIC USING gen;

   FUNCTION describe(tab IN OUT DBMS_TF.TABLE_T, replication_factor NATURAL)
            RETURN DBMS_TF.DESCRIBE_T;

   PROCEDURE fetch_rows(replication_factor NATURALN);
END gen;
/
CREATE PACKAGE BODY gen IS
   FUNCTION range(stop NUMBER)
            RETURN VARCHAR2 SQL_MACRO(TABLE) IS
   BEGIN
      RETURN q'{SELECT ROWNUM-1 n FROM gen.tab(DUAL, stop)}';
   END;

   FUNCTION range(first NUMBER DEFAULT 0, stop NUMBER, step NUMBER DEFAULT 1)
           RETURN VARCHAR2 SQL_MACRO(TABLE) IS
   BEGIN
      RETURN q'{
             SELECT first+n*step n FROM gen.range(ROUND((stop-first)/NULLIF(step,0)))
             }';
   END;

   FUNCTION describe(tab IN OUT DBMS_TF.TABLE_T, replication_factor NATURAL)
            RETURN DBMS_TF.DESCRIBE_T AS
   BEGIN
      RETURN DBMS_TF.DESCRIBE_T(row_replication => true);
   END;

  PROCEDURE fetch_rows(replication_factor NATURALN) as
  BEGIN
    DBMS_TF.ROW_REPLICATION(replication_factor);
  END;
END gen;
/
```

The gen.get_range SQL macro is used in table expressions.

This query returns a sequence of 5 rows starting at zero.

```
SELECT * FROM gen.range(5);
```

Result:

```
         0
         1
         2
         3
         4
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

This query returns a sequence starting at 5, stopping at 10 (not included).

```
SELECT * FROM gen.range(5, 10);
```

Result:

```
         5
         6
         7
         8
         9
```

This query returns a sequence starting at 0, stopping at 1, by increment of 0.1.

```
SELECT * FROM gen.range(0, 1, step=>0.1);
```

Result:

```
         0
        .1
        .2
        .3
        .4
        .5
        .6
        .7
        .8
        .9
```

This query returns a sequence starting at 5, stopping at -6 (not included) by decrement of 2.

```
SELECT * FROM gen.range(+5,-6,-2);
```

Result:

```
       5
       3
       1
      -1
      -3
      -5
```

Related Topics

- Overview of Polymorphic Table Functions
- *Oracle AI Database PL/SQL Packages and Types Reference* for more information about how to specify the PTF implementation package and use the `DBMS_TF` utilities
- *Oracle AI Database Reference* for more information about the SQL_MACRO column in the ALL_PROCEDURES view

Copyright © 1996, 2025, Oracle and/or its affiliates.

SQLCODE Function

In an exception handler, the `SQLCODE` function returns the numeric code of the exception being handled. (Outside an exception handler, `SQLCODE` returns `0`.)

For an internally defined exception, the numeric code is the number of the associated Oracle Database error. This number is negative except for the error "no data found", whose numeric code is +100.

For a user-defined exception, the numeric code is either `+1` **(default)** or the error code associated with the exception by the `EXCEPTION_INIT` pragma.

A SQL statement cannot invoke `SQLCODE`.

If a function invokes `SQLCODE`, and you use the `RESTRICT_REFERENCES` pragma to assert the purity of the function, then you cannot specify the constraints `WNPS` and `RNPS`.

Topics

- Syntax
- Examples
- Related Topics

Syntax

***sqlcode_function* ::=**



Examples

- Example 12-23, "Displaying SQLCODE and SQLERRM Values"

Related Topics

In this chapter:

- "Block"
- "EXCEPTION_INIT Pragma"
- "Exception Handler"
- "RESTRICT_REFERENCES Pragma"
- "SQLERRM Function"

In other chapters:

- "Retrieving Error Code and Error Message"

> **See Also**
>
> *Oracle Database Error Messages Reference* for a list of Oracle Database error messages and information about them, including their numbers

Copyright © 1996, 2025, Oracle and/or its affiliates.

SQLERRM Function

The `SQLERRM` function returns the error message associated with an error code.

> **Note**
>
> The language of the error message depends on the `NLS_LANGUAGE` parameter. For information about this parameter, see *Oracle Database Globalization Support Guide*.

A SQL statement cannot invoke `SQLERRM`.

If a function invokes `SQLERRM`, and you use the `RESTRICT_REFERENCES` pragma to assert the purity of the function, then you cannot specify the constraints `WNPS` and `RNPS`.

> **Note**
>
> `DBMS_UTILITY.FORMAT_ERROR_STACK` is recommended over `SQLERRM`, unless you use the `FORALL` statement with its `SAVE EXCEPTIONS` clause. For more information, see "Retrieving Error Code and Error Message".

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***sqlerrm_function* ::=**



Semantics

sqlerrm_function

error_code

Expression whose value is an Oracle Database error code.

Default: error code associated with the current value of `SQLCODE`.

Like `SQLCODE`, `SQLERRM` without *`error_code`* is useful only in an exception handler. Outside an exception handler, or if the value of *`error_code`* is zero, `SQLERRM` returns ORA-0000.

If the value of *`error_code`* is +100, `SQLERRM` returns ORA-01403.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If the value of *error_code* is a positive number other than +100, SQLERRM returns this message:

```
-error_code: non-ORACLE exception
```

If the value of *error_code* is a negative number whose absolute value is an Oracle Database error code, SQLERRM returns the error message associated with that error code. For example:

```
BEGIN
  DBMS_OUTPUT.PUT_LINE('SQLERRM(-6511): ' || TO_CHAR(SQLERRM(-6511)));
END;
/
```

Result:

```
SQLERRM(-6511): ORA-06511: PL/SQL: cursor already open
```

If the value of *error_code* is a negative number whose absolute value is not an Oracle Database error code, SQLERRM returns this message:

```
ORA-error_code: Message error_code not found; product=RDBMS;
facility=ORA
```

For example:

```
BEGIN
  DBMS_OUTPUT.PUT_LINE('SQLERRM(-50000): ' || TO_CHAR(SQLERRM(-50000)));
END;
/
```

Result:

```
SQLERRM(-50000): ORA-50000: Message 50000 not found; product=RDBMS;
facility=ORA
```

Examples

- Example 12-23, "Displaying SQLCODE and SQLERRM Values"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"
- Example 13-13, "Handling FORALL Exceptions After FORALL Statement Completes"

Related Topics

In this chapter:

- "Block"
- "EXCEPTION_INIT Pragma"
- "RESTRICT_REFERENCES Pragma"
- "SQLCODE Function"

In other chapters:

- "Retrieving Error Code and Error Message"

> **See Also**
>
> *Oracle Database Error Messages Reference* for a list of Oracle Database error messages and information about them

Copyright © 1996, 2025, Oracle and/or its affiliates.

SUPPRESSES_WARNING_6009 Pragma

The `SUPPRESSES_WARNING_6009` pragma marks a subroutine to indicate that the `PLW-06009` warning is suppressed at its call site in an `OTHERS` exception handler. The marked subroutine has the same effect as a `RAISE` statement and suppresses the `PLW-06009` compiler warning.

The `OTHERS` exception handler does not issue the compiler warning `PLW-06009` if an exception is raised explicitly using either a `RAISE` statement or the `RAISE_APPLICATION_ERROR` procedure as the last statement. Similarly, a call to a subroutine marked with the `SUPPRESSES_WARNING_6009` pragma, from the `OTHERS` exception handler, does not issue the `PLW-06009` warning.

The `SUPPRESSES_WARNING_6009` pragma can appear in the following SQL statements :

- CREATE FUNCTION Statement
- CREATE PACKAGE Statement
- CREATE PACKAGE BODY Statement
- CREATE PROCEDURE Statement
- CREATE TYPE Statement
- CREATE TYPE BODY Statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

suppresses_warning_6009_pragma ::=

Semantics

suppresses_warning_6009_pragma

The `SUPPRESSES_WARNING_6009` pragma applies to standalone subprograms, packaged subprograms and to the methods in an Abstract Data Type definition.

For a standalone subprogram, the `SUPPRESSES_WARNING_6009` pragma may appear as the first item in the declaration block of a subprogram definition, immediately after the keyword `IS` or `AS`.

In a package specification, a package body and a type specification, the `SUPPRESSES_WARNING_6009` pragma must appear immediately after the subprogram declaration.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If the subprogram has separate declaration and definition, the SUPPRESSES_WARNING_6009 pragma may be applied either to the subprogram declaration, or to the subprogram definition, or to both.

For overloaded subprograms, SUPPRESSES_WARNING_6009 pragma only applies to the marked overload.

When the SUPPRESSES_WARNING_6009 pragma is applied to a subprogram in a package specification, the subprogram is marked for use both in the package body and in the invokers of the package.

When the SUPPRESSES_WARNING_6009 pragma is applied to a subprogram in the definition of a package body, the subprogram is marked for use only in the package body even if the subprogram is declared in the package specification.

The SUPPRESSES_WARNING_6009 pragma applied to a subprogram in a base type object, is inherited in a derived type object unless there is an override without the pragma in the derived type object.

The SUPPRESSES_WARNING_6009 pragma may be terminated with a "," when applied to a subprogram in a type specification. In all other contexts, the pragma is terminated by ";".

The SUPPRESSES_WARNING_6009 pragma on the subprogram provides a hint to the compiler to suppress the warning PLW-06009 at its call site.

pls_identifier

Identifier of the PL/SQL element to which the pragma is applied.

The identifier is a parameter to the SUPPRESSES_WARNING_6009 pragma that must name the subprogram to which it is applied.

If the identifier in the SUPPRESSES_WARNING_6009 does not identify a subroutine in the declaration section, the pragma has no effect.

Examples

Example 14-42 Enabling the PLW-6009 Warning

This example shows how to set the PLSQL_WARNINGS parameter to enable the PLW-6009 warning in a session for demonstration purpose.

```
ALTER SESSION SET PLSQL_WARNINGS='ENABLE:(6009)';
```

Example 14-43 SUPPRESSES_WARNING_6009 Pragma in a Procedure

This example shows a standalone procedure p1 marked with the SUPPRESSES_WARNING_6009 pragma. The p1 procedure is invoked from an OTHERS exception handler in procedure p2, which does not raise an exception explicitly.

```
CREATE PROCEDURE p1
AUTHID DEFINER
IS
    PRAGMA SUPPRESSES_WARNING_6009(p1);
BEGIN
    RAISE_APPLICATION_ERROR(-20000, 'Unexpected error raised');
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The PLW-06009 warning is not issued when compiling procedure p2.

```
CREATE PROCEDURE p2
AUTHID DEFINER
IS
BEGIN
  DBMS_OUTPUT.PUT_LINE('In procedure p2');
EXCEPTION
  WHEN OTHERS THEN
    p1;
END p2;
/
```

Example 14-44 SUPPRESSES_WARNING_6009 Pragma in a Function

This example shows a standalone function f1 marked with the SUPPRESSES_WARNING_6009 pragma. This function is invoked from an OTHERS exception handler in function f2, which does not explicitly have a RAISE statement.

```
CREATE FUNCTION f1(id NUMBER) RETURN NUMBER
AUTHID DEFINER
IS
  PRAGMA SUPPRESSES_WARNING_6009(f1);
  x NUMBER;
BEGIN
  x := id + 1;
RETURN x;
END;
/
```

The PLW-06009 warning is not issued when compiling function f2.

```
CREATE FUNCTION f2(numval NUMBER) RETURN NUMBER
AUTHID DEFINER
IS
  i NUMBER;
BEGIN
  i := numval + 1;
  RETURN i;
EXCEPTION
  WHEN OTHERS THEN
    RETURN f1(i);
END;
/
```

Example 14-45 SUPPRESSES_WARNING_6009 Pragma in an Overloaded Subprogram in a Package Specification

This example shows an overloaded procedure p1, declared in a package specification. Only the second overload of p1 is marked with the SUPPRESSES_WARNING_6009 pragma. This marked

Copyright © 1996, 2025, Oracle and/or its affiliates.

overload is invoked from the OTHERS exception handler in procedure p6, which does not have an explicit RAISE statement.

```
CREATE PACKAGE pk1 IS
   PROCEDURE p1(x NUMBER);
   PROCEDURE p1;
   PRAGMA SUPPRESSES_WARNING_6009(p1);
END;
/



CREATE OR REPLACE PACKAGE BODY pk1 IS
   PROCEDURE p1(x NUMBER) IS
   BEGIN
      DBMS_OUTPUT.PUT_LINE('In the first overload');
   END;

   PROCEDURE p1 IS
   BEGIN
      DBMS_OUTPUT.PUT_LINE('In the second overload');
      RAISE_APPLICATION_ERROR(-20000, 'Unexpected error');
   END;
END;
/
```

The procedure p6 invokes the p1 second overloaded procedure. The compiler does not issue a PLW-06009 warning when compiling procedure p6.

```
CREATE OR REPLACE PROCEDURE p6 AUTHID DEFINER IS
j NUMBER := 5;
BEGIN
   j := j + 2;
EXCEPTION
   WHEN OTHERS THEN
       pk1.p1;
END;
/
```

Example 14-46 SUPPRESSES_WARNING_6009 Pragma in a Forward Declaration in a Package Body

This example shows a forward declaration subprogram marked with the SUPPRESSES_WARNING_6009 pragma in a package body. This marked procedure pn is invoked from the OTHERS exception handler in procedure p5, which has no RAISE statement.

```
CREATE OR REPLACE PACKAGE pk2 IS
   PROCEDURE p5;
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The compiler does not issue a PLW-06009 warning when creating the package body.

```
CREATE OR REPLACE PACKAGE BODY pk2 IS
   PROCEDURE pn; /* Forward declaration */
   PRAGMA SUPPRESSES_WARNING_6009(pn);

   PROCEDURE p5 IS
   BEGIN
      DBMS_OUTPUT.PUT_LINE('Computing');
   EXCEPTION
      WHEN OTHERS THEN
         pn;
   END;

   PROCEDURE pn IS
   BEGIN
      RAISE_APPLICATION_ERROR(-20000, 'Unexpected error');
   END;
END;
/
```

Example 14-47 SUPPRESSES_WARNING_6009 Pragma in Object Type Methods

This example shows the SUPPRESSES_WARNING_6009 pragma applied to a member method declared in the newid Abstract Data Type (ADT) definition. The marked procedure log_error is invoked from the OTHERS exception handler in the type body, which does not have a RAISE statement.

```
CREATE OR REPLACE TYPE newid AUTHID DEFINER
AS OBJECT(
  ID1 NUMBER,
  MEMBER PROCEDURE incr,
  MEMBER PROCEDURE log_error,
  PRAGMA SUPPRESSES_WARNING_6009(log_error)
);
/
```

The compiler does not issue the PLW-06009 warning when compiling the type body.

```
CREATE OR REPLACE TYPE BODY newid
AS
  MEMBER PROCEDURE incr
  IS
  BEGIN
     DBMS_OUTPUT.PUT_LINE('Computing value');
  EXCEPTION
     WHEN OTHERS THEN
        log_error;
  END;

  MEMBER PROCEDURE log_error
  IS
  BEGIN
    RAISE_APPLICATION_ERROR(-20000, 'Unexpected error');
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  END;
END;
/
```

Related Topics

- Exception Handler
- Pragmas
- PL/SQL Error Handling
- RAISE Statement
- Raising Exceptions Explicitly

%TYPE Attribute

The `%TYPE` attribute lets you declare a constant, variable, collection element, record field, or subprogram parameter to be of the same data type as a previously declared variable or column (without knowing what that type is).

The `%TYPE` attribute cannot be used if the referenced character column has a collation other than `USING_NLS_COMP`.

The item declared with `%TYPE` is the **referencing item**, and the previously declared item is the **referenced item**.

The referencing item inherits the following from the referenced item:

- Data type and size
- Constraints (unless the referenced item is a column)

The referencing item does not inherit the initial value of the referenced item.

If the declaration of the referenced item changes, then the declaration of the referencing item changes accordingly.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***type_attribute* ::=**

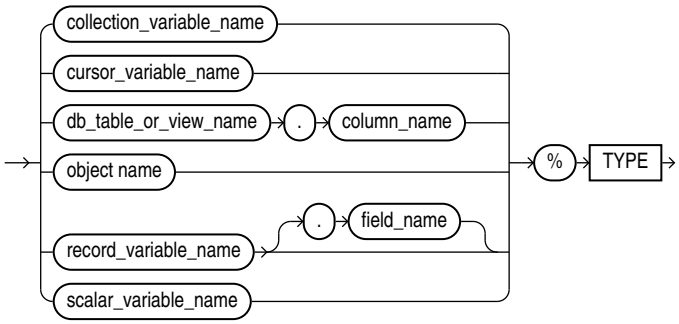

Semantics

type_attribute

collection_variable_name

Name of a collection variable.

Restriction on *collection_variable_name*

In a constant declaration, *collection_variable* cannot be an associative array variable.

cursor_variable_name

Name of a cursor variable.

db_table_or_view_name

Name of a database table or view that is accessible when the declaration is elaborated.

column_name

Name of a column of *db_table_or_view*.

object_name

Name of an instance of an ADT.

record_variable_name

Name of a record variable.

field_name

Name of a field of *record_variable*.

scalar_variable_name

Name of a scalar variable.

Examples

- Example 3-15, "Declaring Variable of Same Type as Column"
- Example 3-16, "Declaring Variable of Same Type as Another Variable"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Related Topics

In this chapter:

- "Constant Declaration"
- "%ROWTYPE Attribute"
- "Scalar Variable Declaration"

In other chapters:

- About Data-Bound Collation
- "Declaring Items using the %TYPE Attribute"

UDF Pragma

The `UDF` pragma tells the compiler that the PL/SQL unit is a **user defined function** that is used primarily in SQL statements, which might improve its performance.

Syntax

***udf_pragma* ::=**



UPDATE Statement Extensions

PL/SQL extends the *`update_set_clause`* and *`where_clause`* of the SQL `UPDATE` statement as follows:

- In the *`update_set_clause`*, you can specify a record. For each selected row, the `UPDATE` statement updates each column with the value of the corresponding record field.
- In the *`where_clause`*, you can specify a `CURRENT OF` clause, which restricts the `UPDATE` statement to the current row of the specified cursor.

> **See Also**
>
> *Oracle Database SQL Language Reference* for the syntax of the SQL `UPDATE` statement

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***update_set_clause* ::=**



***where_clause* ::=**



Semantics

update_set_clause

record

Name of a record variable that represents a row of the item described by *dml_table_expression_clause*. That is, for every column of the row, the record must have a field with a compatible data type. If a column has a `NOT NULL` constraint, then its corresponding field cannot have a `NULL` value.

where_clause

for_update_cursor

Name of a `FOR UPDATE` cursor; that is, an explicit cursor associated with a `SELECT FOR UPDATE` statement.

Examples

- Example 6-61, "Updating Rows with Records"

Related Topics

In this chapter:

- "Explicit Cursor Declaration and Definition"
- "Record Variable Declaration"
- "%ROWTYPE Attribute"

In other chapters:

- "Updating Rows with Records"
- "Restrictions on Record Inserts and Updates"
- "SELECT FOR UPDATE and FOR UPDATE Cursors"

Copyright © 1996, 2025, Oracle and/or its affiliates.

WHILE LOOP Statement

The `WHILE LOOP` statement runs one or more statements while a condition is `TRUE`.

The `WHILE LOOP` statement ends when the condition becomes `FALSE` or `NULL`, or when a statement inside the loop transfers control outside the loop or raises an exception.

Topics

- Syntax
- Semantics
- Examples
- Related Topics

Syntax

***while_loop_statement* ::=**



(*boolean_expression* ::= , *statement* ::=)

Semantics

while_loop_statement

boolean_expression

Expression whose value is `TRUE`, `FALSE`, or `NULL`.

`boolean_expression` is evaluated at the beginning of each iteration of the loop. If its value is `TRUE`, the statements after `LOOP` run. Otherwise, control transfers to the statement after the `WHILE LOOP` statement.

statement

To prevent an infinite loop, at least one statement must change the value of *`boolean_expression`* to `FALSE` or `NULL`, transfer control outside the loop, or raise an exception. The statements that can transfer control outside the loop are:

- "CONTINUE Statement" (when it transfers control to the next iteration of an enclosing labeled loop)
- "EXIT Statement"
- "GOTO Statement"
- "RAISE Statement"

label

Label that identifies *`while_loop_statement`* (see "*statement* ::=" and "*label*"). `CONTINUE`, `EXIT`, and `GOTO` statements can reference this label.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Labels improve readability, especially when `LOOP` statements are nested, but only if you ensure that the label in the `END LOOP` statement matches a label at the beginning of the same `LOOP` statement (the compiler does not check).

Examples

Example 14-48 WHILE LOOP Statements

The statements in the first `WHILE LOOP` statement never run, and the statements in the second `WHILE LOOP` statement run once.

```
DECLARE
  done  BOOLEAN := FALSE;
BEGIN
  WHILE done LOOP
    DBMS_OUTPUT.PUT_LINE ('This line does not print.');
    done := TRUE;  -- This assignment is not made.
  END LOOP;

  WHILE NOT done LOOP
    DBMS_OUTPUT.PUT_LINE ('Hello, world!');
    done := TRUE;
  END LOOP;
END;
/
```

Result:

```
Hello, world!
```

Related Topics

- "Basic LOOP Statement"
- "Cursor FOR LOOP Statement"
- "Explicit Cursor Declaration and Definition"
- "FETCH Statement"
- "FOR LOOP Statement"
- "FORALL Statement"
- "OPEN Statement"
- "WHILE LOOP Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

15

SQL Statements for Stored PL/SQL Units

This chapter explains how to use the SQL statements that create, change, and drop stored PL/SQL units.

CREATE [OR REPLACE] Statements

Each of these SQL statements creates a PL/SQL unit at schema level and stores it in the database:

- CREATE FUNCTION Statement
- CREATE LIBRARY Statement
- CREATE PACKAGE Statement
- CREATE PACKAGE BODY Statement
- CREATE PROCEDURE Statement
- CREATE TRIGGER Statement
- CREATE TYPE Statement
- CREATE TYPE BODY Statement

Each of these `CREATE` statements has an optional `OR REPLACE` clause. Specify `OR REPLACE` to re-create an existing PL/SQL unit—that is, to change its declaration or definition without dropping it, re-creating it, and regranting object privileges previously granted on it. If you redefine a PL/SQL unit, the database recompiles it.

> ⚠ **Caution**
>
> A `CREATE OR REPLACE` statement does not issue a warning before replacing the existing PL/SQL unit.

None of these `CREATE` statements can appear in a PL/SQL block.

ALTER Statements

To recompile an existing PL/SQL unit without re-creating it (without changing its declaration or definition), use one of these SQL statements:

- ALTER FUNCTION Statement
- ALTER LIBRARY Statement
- ALTER PACKAGE Statement
- ALTER PROCEDURE Statement
- ALTER TRIGGER Statement
- ALTER TYPE Statement

Reasons to use an `ALTER` statement are:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- To explicitly recompile a stored unit that has become invalid, thus eliminating the need for implicit runtime recompilation and preventing associated runtime compilation errors and performance overhead.
- To recompile a stored unit with different compilation parameters.
- To enable or disable a trigger.
- To specify the `EDITIONABLE` or `NONEDITIONABLE` property of a stored unit whose schema object type is not yet editionable in its schema.

The `ALTER TYPE` statement has additional uses.

DROP Statements

To drop an existing PL/SQL unit from the database, use one of these SQL statements:

- DROP FUNCTION Statement
- DROP LIBRARY Statement
- DROP PACKAGE Statement
- DROP PROCEDURE Statement
- DROP TRIGGER Statement
- DROP TYPE Statement
- DROP TYPE BODY Statement

Related Topics

- For instructions for reading the syntax diagrams in this chapter, see *Oracle Database SQL Language Reference*.
- For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.
- For information about compilation parameters, see "PL/SQL Units and Compilation Parameters".

ALTER FUNCTION Statement

The `ALTER FUNCTION` statement explicitly recompiles a standalone function.

Explicit recompilation eliminates the need for implicit runtime recompilation and prevents associated runtime compilation errors and performance overhead.

> **Note**
>
> This statement does not change the declaration or definition of an existing function. To redeclare or redefine a standalone function, use the "CREATE FUNCTION Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Example
- Related Topics

Prerequisites

If the function is in the SYS schema, you must be connected as SYSDBA. Otherwise, the function must be in your schema or you must have ALTER ANY PROCEDURE system privilege.

Syntax

***alter_function* ::=**

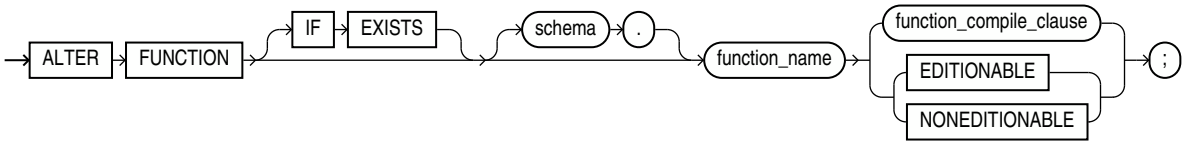

***function_compile_clause* ::=**



(*compiler_parameters_clause* ::=)

Semantics

alter_function

IF EXISTS

Recompiles the function if it exists. If no such function exists, the statement is ignored without error.

schema

Name of the schema containing the function. **Default:** your schema.

function_name

Name of the function to be recompiled.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the function becomes an editioned or noneditioned object if editioning is later enabled for the schema object type FUNCTION in *schema*. **Default:** EDITIONABLE. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

function_compile_clause

Recompiles the function, whether it is valid or invalid.

See *compile_clause* semantics.

See also DEFAULT COLLATION Clause compilation semantics.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example

Example 15-1 Recompiling a Function

To explicitly recompile the function `get_bal` owned by the sample user `oe`, issue this statement:

```
ALTER FUNCTION oe.get_bal COMPILE;
```

If the database encounters no compilation errors while recompiling `get_bal`, then `get_bal` becomes valid. The database can subsequently run it without recompiling it at run time. If recompiling `get_bal` results in compilation errors, then the database returns an error, and `get_bal` remains invalid.

The database also invalidates all objects that depend upon `get_bal`. If you subsequently reference one of these objects without explicitly recompiling it first, then the database recompiles it implicitly at run time.

Related Topics

- "CREATE FUNCTION Statement"
- "DROP FUNCTION Statement"

ALTER LIBRARY Statement

The `ALTER LIBRARY` statement explicitly recompiles a library.

Explicit recompilation eliminates the need for implicit runtime recompilation and prevents associated runtime compilation errors and performance overhead.

> **Note**
>
> This statement does not change the declaration or definition of an existing library. To redeclare or redefine a library, use the "CREATE LIBRARY Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

If the library is in the `SYS` schema, you must be connected as `SYSDBA`. Otherwise, the library must be in your schema or you must have the `ALTER ANY LIBRARY` system privilege.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***alter_library* ::=**

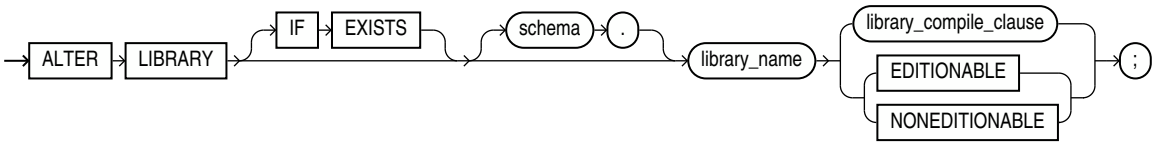

***library_compile_clause* ::=**



(*compiler_parameters_clause* ::=)

Semantics

alter_library

IF EXISTS

Alters the library if it exists. If no such library exists, the statement is ignored without error.

library_name

Name of the library to be altered.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the library becomes an editioned or noneditioned object if editioning is later enabled for the schema object type `LIBRARY` in *schema*. **Default:** `EDITIONABLE`. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

library_compile_clause

Recompiles the library.

See *compile_clause* and *compiler_parameters_clause* semantics.

Example

Example 15-2 Recompiling a Library

To explicitly recompile the library `my_ext_lib` owned by the sample user `hr`, issue this statement:

```
ALTER LIBRARY IF EXISTS hr.my_ext_lib COMPILE;
```

If the database encounters no compilation errors while recompiling `my_ext_lib`, then `my_ext_lib` becomes valid. The database can subsequently run it without recompiling it at run time. If recompiling `my_ext_lib` results in compilation errors, then the database returns an error, and `my_ext_lib` remains invalid.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The database also invalidates all objects that depend upon `my_ext_lib`. If you subsequently reference one of these objects without explicitly recompiling it first, then the database recompiles it implicitly at run time.

If `my_ext_lib` does not already exist in the schema, this statement is ignored without error due to the `IF EXISTS` clause. Note that the output message is the same whether or not the library exists (in this case, `Library altered`).

Related Topics

- "CREATE LIBRARY Statement"
- "DROP LIBRARY Statement"

ALTER PACKAGE Statement

The `ALTER PACKAGE` statement explicitly recompiles a package specification, body, or both. Explicit recompilation eliminates the need for implicit runtime recompilation and prevents associated runtime compilation errors and performance overhead.

Because all objects in a package are stored as a unit, the `ALTER PACKAGE` statement recompiles all package objects. You cannot use the `ALTER PROCEDURE` statement or `ALTER FUNCTION` statement to recompile individually a procedure or function that is part of a package.

> **Note**
>
> This statement does not change the declaration or definition of an existing package. To redeclare or redefine a package, use the "CREATE PACKAGE Statement", or the "CREATE PACKAGE BODY Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

If the package is in the `SYS` schema, you must be connected as `SYSDBA`. Otherwise, the package must be in your schema or you must have `ALTER ANY PROCEDURE` system privilege.

Syntax

***alter_package* ::=**

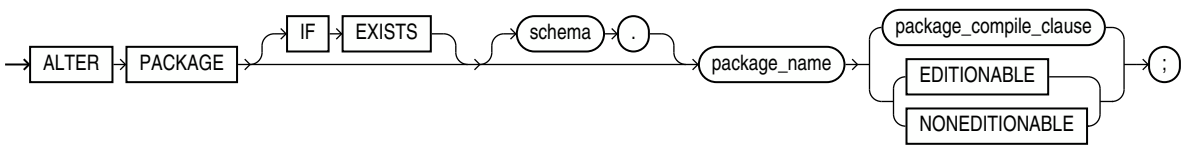

Copyright © 1996, 2025, Oracle and/or its affiliates.

***package_compile_clause* ::=**

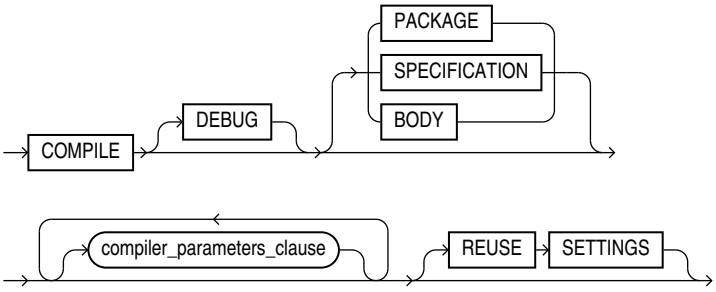

(*compiler_parameters_clause* ::=)

Semantics

alter_package

IF EXISTS

Recompiles the package if it exists. If no such package exists, the statement is ignored without error.

schema

Name of the schema containing the package. **Default:** your schema.

package_name

Name of the package to be recompiled.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the package becomes an editioned or noneditioned object if editioning is later enabled for the schema object type `PACKAGE` in *`schema`*. **Default:** `EDITIONABLE`. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

package_compile_clause

Recompiles the package specification, body, or both.

See *compile_clause* and *compiler_parameters_clause* semantics.

Examples

Example 15-3 Recompiling a Package

This statement explicitly recompiles the specification and body of the `hr.emp_mgmt` package.

See "CREATE PACKAGE Statement" for the example that creates this package.

```
ALTER PACKAGE emp_mgmt COMPILE PACKAGE;
```

If the database encounters no compilation errors while recompiling the `emp_mgmt` specification and body, then `emp_mgmt` becomes valid. The user `hr` can subsequently invoke or reference all package objects declared in the specification of `emp_mgmt` without runtime recompilation. If recompiling `emp_mgmt` results in compilation errors, then the database returns an error and `emp_mgmt` remains invalid.

Copyright © 1996, 2025, Oracle and/or its affiliates.

The database also invalidates all objects that depend upon `emp_mgmt`. If you subsequently reference one of these objects without explicitly recompiling it first, then the database recompiles it implicitly at run time.

To recompile the body of the `emp_mgmt` package in the schema `hr`, issue this statement:

```
ALTER PACKAGE hr.emp_mgmt COMPILE BODY;
```

If the database encounters no compilation errors while recompiling the package body, then the body becomes valid. The user `hr` can subsequently invoke or reference all package objects declared in the specification of `emp_mgmt` without runtime recompilation. If recompiling the body results in compilation errors, then the database returns an error message and the body remains invalid.

Because this statement recompiles the body and not the specification of `emp_mgmt`, the database does not invalidate dependent objects.

Related Topics

- "CREATE PACKAGE Statement"
- "DROP PACKAGE Statement"

ALTER PROCEDURE Statement

The `ALTER PROCEDURE` statement explicitly recompiles a standalone procedure.

Explicit recompilation eliminates the need for implicit runtime recompilation and prevents associated runtime compilation errors and performance overhead.

To recompile a procedure that is part of a package, recompile the entire package using the "ALTER PACKAGE Statement").

> **Note**
>
> This statement does not change the declaration or definition of an existing procedure. To redeclare or redefine a standalone procedure, use the "CREATE PROCEDURE Statement" with the `OR REPLACE` clause.

The `ALTER PROCEDURE` statement is very similar to the `ALTER FUNCTION` statement. See "ALTER FUNCTION Statement" for more information.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

If the procedure is in the `SYS` schema, you must be connected as `SYSDBA`. Otherwise, the procedure must be in your schema or you must have `ALTER ANY PROCEDURE` system privilege.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***alter_procedure* ::=**

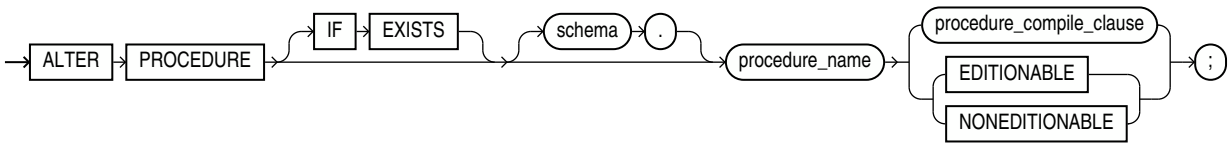

***procedure_compile_clause* ::=**



(*compiler_parameters_clause* ::=)

Semantics

alter_procedure

IF EXISTS

Alters the procedure if it exists. If no such procedure exists, the statement is ignored without error.

schema

Name of the schema containing the procedure. **Default:** your schema.

procedure_name

Name of the procedure to be altered.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the procedure becomes an editioned or noneditioned object if editioning is later enabled for the schema object type `PROCEDURE` in *schema*. **Default:** `EDITIONABLE`. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

procedure_compile_clause

See *compile_clause* and *compiler_parameters_clause* semantics.

Example

Example 15-4 Recompiling a Procedure

To explicitly recompile the procedure `remove_emp` owned by the user `hr`, issue this statement:

```
ALTER PROCEDURE IF EXISTS hr.remove_emp COMPILE;
```

If the database encounters no compilation errors while recompiling `remove_emp`, then `remove_emp` becomes valid. The database can subsequently run it without recompiling it at run

Copyright © 1996, 2025, Oracle and/or its affiliates.

time. If recompiling `remove_emp` results in compilation errors, then the database returns an error and `remove_emp` remains invalid.

The database also invalidates all dependent objects. These objects include any procedures, functions, and package bodies that invoke `remove_emp`. If you subsequently reference one of these objects without first explicitly recompiling it, then the database recompiles it implicitly at run time.

If `remove_emp` does not already exist in the schema, this statement is ignored without error due to the `IF EXISTS` clause. Note that the output message is the same whether or not the procedure exists (in this case, `Procedure altered`).

Related Topics

- "CREATE PROCEDURE Statement"
- "DROP PROCEDURE Statement"

ALTER TRIGGER Statement

The `ALTER TRIGGER` statement enables, disables, compiles, or renames a database trigger.

> **Note**
>
> This statement does not change the declaration or definition of an existing trigger. To redeclare or redefine a trigger, use the "CREATE TRIGGER Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

If the trigger is in the `SYS` schema, you must be connected as `SYSDBA`. Otherwise, the trigger must be in your schema or you must have `ALTER ANY TRIGGER` system privilege.

In addition, to alter a trigger on `DATABASE`, you must have the `ADMINISTER DATABASE TRIGGER` system privilege.

> **See Also**
>
> "CREATE TRIGGER Statement" for more information about triggers based on `DATABASE` triggers

Copyright © 1996, 2025, Oracle and/or its affiliates.

Syntax

***alter_trigger* ::=**

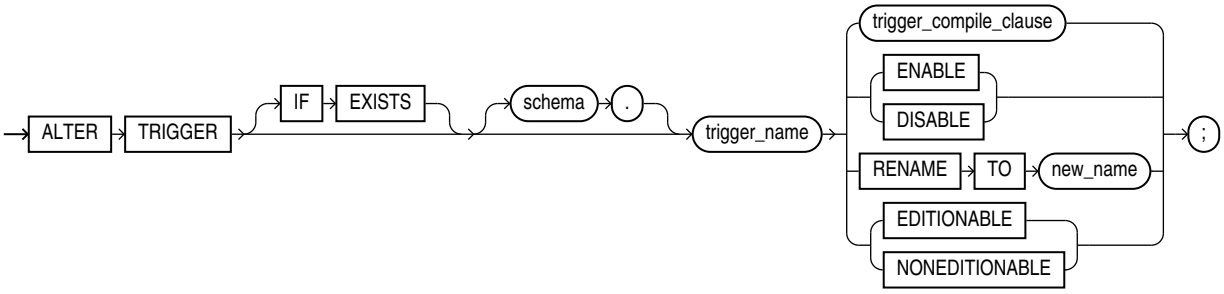

***trigger_compile_clause* ::=**



(*compiler_parameters_clause* ::=)

Semantics

alter_trigger

IF EXISTS

Enables, disables, compiles, or renames the trigger if it exists. If no such trigger exists, the statement is ignored without error.

schema

Name of the schema containing the trigger. **Default:** your schema.

trigger_name

Name of the trigger to be altered.

[ENABLE | DISABLE]

Enables or disables the trigger.

RENAME TO *new_name*

Renames the trigger without changing its state.

When you rename a trigger, the database rebuilds the remembered source of the trigger in the `*_SOURCE` static data dictionary views. As a result, comments and formatting may change in the `TEXT` column of those views even though the trigger source did not change.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the trigger becomes an editioned or noneditioned object if editioning is later enabled for the schema object type `TRIGGER` in *`schema`*. **Default:** `EDITIONABLE`. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Restriction on NONEDITIONABLE

You cannot specify `NONEDITIONABLE` for a crossedition trigger.

trigger_compile_clause

Recompiles the trigger, whether it is valid or invalid.

See *compile_clause* and *compiler_parameters_clause* semantics.

Examples

Example 15-5 Disabling Triggers

The sample schema `hr` has a trigger named `update_job_history` created on the `employees` table. The trigger fires whenever an `UPDATE` statement changes an employee's `job_id`. The trigger inserts into the `job_history` table a row that contains the employee's ID, begin and end date of the last job, and the job ID and department.

When this trigger is created, the database enables it automatically. You can subsequently disable the trigger with this statement:

```
ALTER TRIGGER update_job_history DISABLE;
```

When the trigger is disabled, the database does not fire the trigger when an `UPDATE` statement changes an employee's job.

Example 15-6 Enabling Triggers

After disabling the trigger, you can subsequently enable it with this statement:

```
ALTER TRIGGER update_job_history ENABLE;
```

After you reenable the trigger, the database fires the trigger whenever an `UPDATE` statement changes an employee's job. If an employee's job is updated while the trigger is disabled, then the database does not automatically fire the trigger for this employee until another transaction changes the `job_id` again.

Related Topics

In this chapter:

- "CREATE TRIGGER Statement"
- "DROP TRIGGER Statement"

In other chapters:

- "Trigger Compilation, Invalidation, and Recompilation"
- "Trigger Enabling and Disabling"

ALTER TYPE Statement

Use the ALTER TYPE statement to add or drop member attributes or methods. You can change the existing properties of an object type, and you can modify the scalar attributes of the type. You can also use this statement to recompile the specification or body of the type or to

Copyright © 1996, 2025, Oracle and/or its affiliates.

change the specification of an object type by adding new object member subprogram specifications.

The `ALTER TYPE` statement does one of the following to a type that was created with "CREATE TYPE Statement" and "CREATE TYPE BODY Statement":

- **Evolves** the type; that is, adds or drops member attributes or methods.

  For more information about type evolution, see *Oracle Database Object-Relational Developer's Guide*.
- Changes the specification of the type by adding object member subprogram specifications.
- Recompiles the specification or body of the type.
- Resets the version of the type to 1, so that it is no longer considered to be evolved.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

If the type is in the `SYS` schema, you must be connected as `SYSDBA`. Otherwise, the type must be in your schema and you must have `CREATE TYPE` or `CREATE ANY TYPE` system privilege, or you must have `ALTER ANY TYPE` system privileges.

Syntax

***alter_type* ::=**

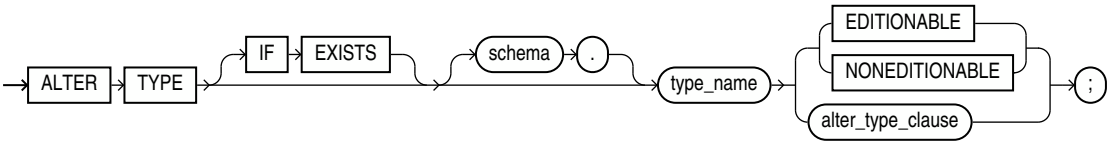

***alter_type_clause* ::=**

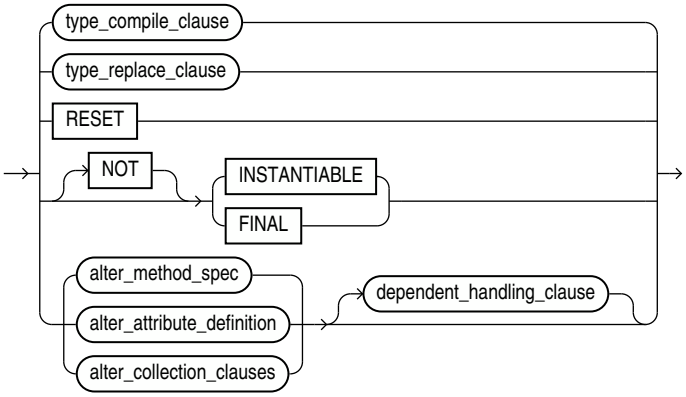

Copyright © 1996, 2025, Oracle and/or its affiliates.

(*type_compile_clause* ::=, *type_replace_clause* ::=, *alter_attribute_definition* ::=, *alter_method_spec* ::=, *alter_collections_clauses*::=, *dependent_handling_clause* ::=)

***type_compile_clause* ::=**

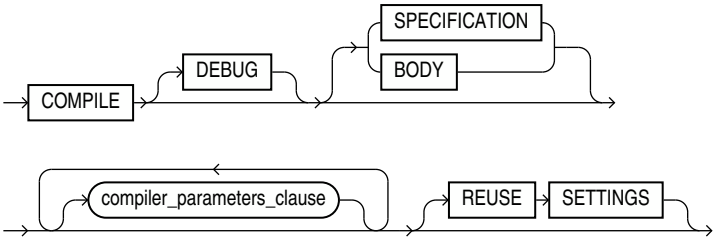

(*compiler_parameters_clause* ::=)

***type_replace_clause* ::=**

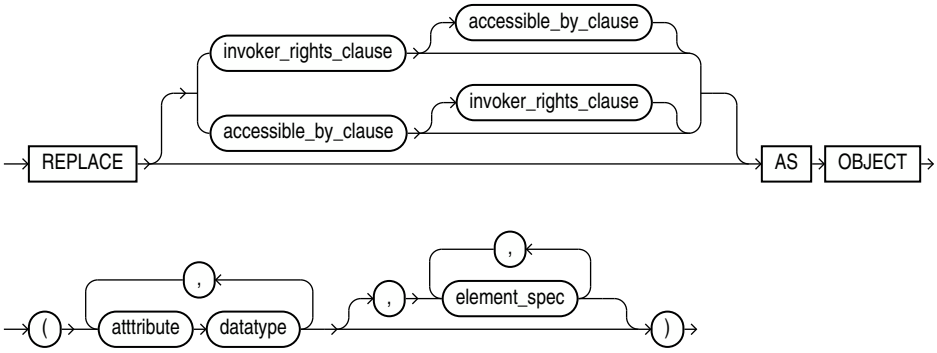

(*accessible_by_clause* ::=, *invoker_rights_clause* ::=, *element_spec* ::=)

***alter_method_spec* ::=**



(*map_order_function_spec* ::=, *subprogram_spec* ::=)

***alter_attribute_definition* ::=**

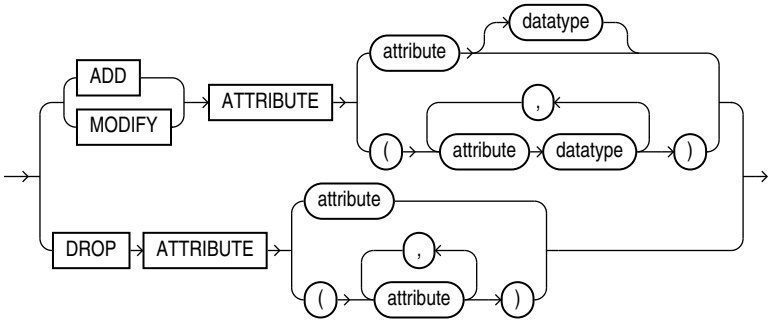

Copyright © 1996, 2025, Oracle and/or its affiliates.

***alter_collections_clauses*::=**



***dependent_handling_clause* ::=**

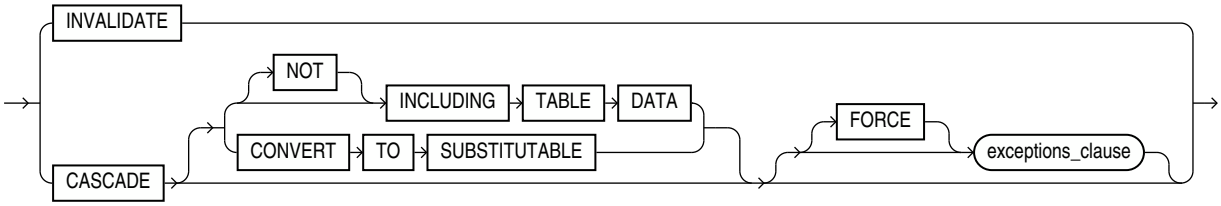

***exceptions_clause* ::=**



Semantics

alter_type

IF EXISTS

Performs the action specified by the *alter_type_clause* on the type if it exists. If no such type exists, the statement is ignored without error.

schema

Name of the schema containing the type. **Default:** your schema.

type_name

Name of an ADT, VARRAY type, or nested table type.

Restriction on *type_name*

You cannot evolve an editioned ADT.

The ALTER TYPE statement fails with ORA-22348 if either of the following is true:

- The type is an editioned ADT and the ALTER TYPE statement has no *type_compile_clause*.

  (You can use the ALTER TYPE statement to recompile an editioned object type, but not for any other purpose.)
- The type has a dependent that is an editioned ADT and the ALTER TYPE statement has a CASCADE clause.

An **editioned object** is a schema object that has an editionable object type and was created by a user for whom editions are enabled.

Copyright © 1996, 2025, Oracle and/or its affiliates.

{ EDITIONABLE | NONEDITIONABLE }

Specifies whether the type becomes an editioned or noneditioned object if editioning is later enabled for the schema object type `TYPE` in *schema*. **Default:** `EDITIONABLE`. For information about altering editioned and noneditioned objects, see *Oracle Database Development Guide*.

alter_type_clause

RESET

Resets the version of this type to 1, so that it is no longer considered to be evolved.

> **Note**
>
> Resetting the version of this type to 1 invalidates all of its dependents.

`RESET` is intended for evolved ADTs that are preventing their owners from being editions-enabled. For information about enabling editions for users, see *Oracle Database Development Guide*.

To see the version number of an ADT, select `VERSION#` from the static data dictionary view `*_TYPE_VERSIONS`. For example:

```
SELECT Version#
FROM DBA_TYPE_VERSIONS
WHERE Owner = schema
AND Name = 'type_name'
AND Type = 'TYPE'
```

For an evolved ADT, the preceding query returns multiple rows with different version numbers. `RESET` deletes every row whose version number is less than the maximum version number, and resets the version number of the remaining rows to 1.

Restriction on RESET

You cannot specify `RESET` if the type has any table dependents (direct or indirect).

[NOT] INSTANTIABLE

Specify `INSTANTIABLE` if object instances of this type can be constructed.

Specify `NOT INSTANTIABLE` if no constructor (default or user-defined) exists for this type. You must specify these keywords for any type with noninstantiable methods and for any type that has no attributes (either inherited or specified in this statement).

Restriction on NOT INSTANTIABLE

You cannot change a user-defined type from `INSTANTIABLE` to `NOT INSTANTIABLE` if the type has any table dependents.

[NOT] FINAL

Specify `FINAL` if no further subtypes can be created for this type.

Specify `NOT FINAL` if further subtypes can be created under this type.

If you change the property from `FINAL` to `NOT FINAL`, or the reverse, then you must specify the `CASCADE` clause of the "*dependent_handling_clause*" to convert data in dependent columns and tables. Specifically:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- If you change a type from `NOT FINAL` to `FINAL`, then you must specify `CASCADE [INCLUDING TABLE DATA]`. You cannot defer data conversion with `CASCADE NOT INCLUDING TABLE DATA`.
- If you change a type from `FINAL` to `NOT FINAL`, then:
  - Specify `CASCADE INCLUDING TABLE DATA` if you want to create substitutable tables and columns of that type, but you are not concerned about the substitutability of the existing dependent tables and columns.

    The database marks all existing dependent columns and tables `NOT SUBSTITUTABLE AT ALL LEVELS`, so you cannot insert the subtype instances of the altered type into these existing columns and tables.
  - Specify `CASCADE CONVERT TO SUBSTITUTABLE` if you want to create substitutable tables and columns of the type and also store subtype instances of the altered type in existing dependent tables and columns.

    The database marks all existing dependent columns and tables `SUBSTITUTABLE AT ALL LEVELS` except those that are explicitly marked `NOT SUBSTITUTABLE AT ALL LEVELS`.

> **See Also**
>
> *Oracle Database Object-Relational Developer's Guide* for a full discussion of ADT evolution

Restriction on FINAL

You cannot change a user-defined type from `NOT FINAL` to `FINAL` if the type has any subtypes.

type_compile_clause

(Default) Recompiles the type specification and body.

See *compile_clause* and *compiler_parameters_clause* semantics.

type_replace_clause

Starting with Oracle Database 12c Release 2 (12.2), the *type_replace_clause* is deprecated. Use the *alter_method_spec* clause instead. Alternatively, you can recreate the type using the `CREATE OR REPLACE TYPE` statement.
Adds member subprogram specifications.

Restriction on *type_replace_clause*

This clause is valid only for ADTs, not for nested tables or varrays.

attribute

Name of an object attribute. Attributes are data items with a name and a type specifier that form the structure of the object.

element_spec

Specifies elements of the redefined object.

alter_method_spec

Adds a method to or drops a method from the type. The database disables any function-based indexes that depend on the type.

Copyright © 1996, 2025, Oracle and/or its affiliates.

In one `ALTER TYPE` statement you can add or drop multiple methods, but you can reference each method only once.

ADD

When you add a method, its name must not conflict with any existing attributes in its type hierarchy.

DROP

When you drop a method, the database removes the method from the target type.

Restriction on DROP

You cannot drop from a subtype a method inherited from its supertype. Instead you must drop the method from the supertype.

alter_attribute_definition

Adds, drops, or modifies an attribute of an ADT. In one `ALTER TYPE` statement, you can add, drop, or modify multiple member attributes or methods, but you can reference each attribute or method only once.

ADD ATTRIBUTE

Name of the attribute must not conflict with existing attributes or methods in the type hierarchy. The database adds the attribute to the end of the locally defined attribute list.

If you add the attribute to a supertype, then it is inherited by all of its subtypes. In subtypes, inherited attributes always precede declared attributes. Therefore, you might need to update the mappings of the implicitly altered subtypes after adding an attribute to a supertype.

DROP ATTRIBUTE

When you drop an attribute from a type, the database drops the column corresponding to the dropped attribute and any indexes, statistics, and constraints referencing the dropped attribute.

You need not specify the data type of the attribute you are dropping.

Restrictions on DROP ATTRIBUTE

- You cannot drop an attribute inherited from a supertype. Instead you must drop the attribute from the supertype.
- You cannot drop an attribute that is part of a partitioning, subpartitioning, or cluster key.

> ⚠ **Caution**
>
> If you use the `INVALIDATE` option, then the compiler does not check dependents; therefore, this rule is not enforced. However, dropping such an attribute leaves the table in an unusable state.

- You cannot drop an attribute of a primary-key-based object identifier of an object table or a primary key of an index-organized table.
- You cannot drop all of the attributes of a root type. Instead you must drop the type. However, you can drop all of the locally declared attributes of a subtype.

MODIFY ATTRIBUTE

Copyright © 1996, 2025, Oracle and/or its affiliates.

Modifies the data type of an existing scalar attribute. For example, you can increase the length of a `VARCHAR2` or `RAW` attribute, or you can increase the precision or scale of a numeric attribute.

Restriction on MODIFY ATTRIBUTE

You cannot expand the size of an attribute referenced in a function-based index, domain index, or cluster key.

alter_collection_clauses

These clauses are valid only for collection types.

MODIFY LIMIT *integer*

Increases the number of elements in a varray. It is not valid for nested tables. Specify an integer greater than the current maximum number of elements in the varray.

MODIFY ELEMENT TYPE *datatype*

Increases the precision, size, or length of a scalar data type of a varray or nested table. This clause is not valid for collections of ADTs.

- For a collection of `NUMBER`, you can increase the precision or scale.
- For a collection of `RAW`, you can increase the maximum size.
- For a collection of `VARCHAR2` or `NVARCHAR2`, you can increase the maximum length.

dependent_handling_clause

Specifies how the database is to handle objects that are dependent on the modified type. If you omit this clause, then the `ALTER TYPE` statement terminates if the type has any dependent type or table.

INVALIDATE

Invalidates all dependent objects without any checking mechanism. Starting with Oracle Database 12c Release 2 (12.2), the `INVALIDATE` command is deprecated. Oracle recommends that you use the `CASCADE` clause instead.

> ⚠ **Caution**
>
> The database does not validate the type change, so use this clause with caution. For example, if you drop an attribute that is a partitioning or cluster key, then the table becomes unusable.

CASCADE

Propagates the type change to dependent types and tables. The database terminates the statement if any errors are found in the dependent types or tables unless you also specify `FORCE`.

If you change the property of the type between `FINAL` and `NOT FINAL`, then you must specify this clause to convert data in dependent columns and tables.

INCLUDING TABLE DATA

Copyright © 1996, 2025, Oracle and/or its affiliates.

(Default) Converts data stored in all user-defined columns to the most recent version of the column type.

> **Note**
>
> You must specify this clause if your column data is in Oracle database version 8.0 image format. This clause is also required if you are changing the type property between `FINAL` and `NOT FINAL`

- For each attribute added to the column type, the database adds an attribute to the data and initializes it to null.
- For each attribute dropped from the referenced type, the database removes the corresponding attribute data from each row in the table.

If you specify `INCLUDING TABLE DATA`, then all of the tablespaces containing the table data must be in read/write mode.

If you specify `NOT INCLUDING TABLE DATA`, then the database upgrades the metadata of the column to reflect the changes to the type but does not scan the dependent column and update the data as part of this `ALTER TYPE` statement. However, the dependent column data remains accessible, and the results of subsequent queries of the data reflect the type modifications.

CONVERT TO SUBSTITUTABLE

Specify this clause if you are changing the type from `FINAL` to `NOT FINAL` and you want to create substitutable tables and columns of the type and also store subtype instances of the altered type in existing dependent tables and columns.

exceptions_clause

FORCE

Specify `FORCE` if you want the database to ignore the errors from dependent tables and indexes and log all errors in the specified exception table. The exception table must have been created by running the `DBMS_UTILITY.CREATE_ALTER_TYPE_ERROR_TABLE` procedure.

Examples

See "CREATE TYPE Statement" for examples creating the types referenced in these examples.

Example 15-7 Adding a Member Function

This example uses the ADT `data_typ1`.

A method is added to `data_typ1` and its type body is modified to correspond. The date formats are consistent with the `order_date` column of the `oe.orders` sample table.

```
ALTER TYPE data_typ1
   ADD MEMBER FUNCTION qtr(der_qtr DATE)
   RETURN CHAR CASCADE;

CREATE OR REPLACE TYPE BODY data_typ1 IS
  MEMBER FUNCTION prod (invent NUMBER) RETURN NUMBER IS
  BEGIN
  RETURN (year + invent);
  END;
     MEMBER FUNCTION qtr(der_qtr DATE) RETURN CHAR IS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      BEGIN
        IF (der_qtr < TO_DATE('01-APR', 'DD-MON')) THEN
          RETURN 'FIRST';
        ELSIF (der_qtr < TO_DATE('01-JUL', 'DD-MON')) THEN
          RETURN 'SECOND';
        ELSIF (der_qtr < TO_DATE('01-OCT', 'DD-MON')) THEN
          RETURN 'THIRD';
        ELSE
          RETURN 'FOURTH';
        END IF;
      END;
    END;
/
```

Example 15-8 Adding a Collection Attribute

This example adds the `author` attribute to the `textdoc_tab` object column of the `text` table.

```
CREATE TABLE text (
   doc_id       NUMBER,
   description  textdoc_tab)
   NESTED TABLE description STORE AS text_store;

ALTER TYPE textdoc_typ
   ADD ATTRIBUTE (author VARCHAR2) CASCADE;
```

The `CASCADE` keyword is required because both the `textdoc_tab` and `text` table are dependent on the `textdoc_typ` type.

Example 15-9 Increasing the Number of Elements of a Collection Type

This example increases the maximum number of elements in the varray `phone_list_typ_demo`.

```
ALTER TYPE phone_list_typ_demo
  MODIFY LIMIT 10 CASCADE;
```

Example 15-10 Increasing the Length of a Collection Type

This example increases the length of the varray element type `phone_list_typ`.

```
ALTER TYPE phone_list_typ
  MODIFY ELEMENT TYPE VARCHAR(64) CASCADE;
```

Example 15-11 Recompiling a Type

This example recompiles type `cust_address_typ` in the `hr` schema.

```
ALTER TYPE cust_address_typ2 COMPILE;
```

Example 15-12 Recompiling a Type Specification

This example compiles the type specification of `link2`.

```
CREATE TYPE link1 AS OBJECT
  (a NUMBER);
/
CREATE TYPE link2 AS OBJECT
  (a NUMBER,
   b link1,
   MEMBER FUNCTION p(c1 NUMBER) RETURN NUMBER);
/
CREATE TYPE BODY link2 AS
   MEMBER FUNCTION p(c1 NUMBER) RETURN NUMBER IS
      BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
         dbms_output.put_line(c1);
         RETURN c1;
      END;
   END;
/
```

In this example, both the specification and body of `link2` are invalidated because `link1`, which is an attribute of `link2`, is altered.

```
ALTER TYPE link1 ADD ATTRIBUTE (b NUMBER) INVALIDATE;
```

You must recompile the type by recompiling the specification and body in separate statements:

```
ALTER TYPE link2 COMPILE SPECIFICATION;

ALTER TYPE link2 COMPILE BODY;
```

Alternatively, you can compile both specification and body at the same time:

```
ALTER TYPE link2 COMPILE;
```

Example 15-13 Evolving and Resetting an ADT

This example creates an ADT in the schema `Usr`, evolves that ADT, and then tries to enable editions for `Usr`, which fails.

Then the example resets the version of the ADT to 1 and succeeds in enabling editions for `Usr`. To show the version numbers of the newly created, evolved, and reset ADT, the example uses the static data dictionary view `DBA_TYPE_VERSIONS`.

```
-- Create ADT in schema Usr:
create type Usr.My_ADT authid Definer is object(a1 number)

-- Show version number of ADT:
select Version#||Chr(10)||Text t
from DBA_Type_Versions
where Owner = 'USR'
and Type_Name = 'MY_ADT'
/
```

Result:

```
T
--------------------------------------------------------------------------------
1
type     My_ADT authid Definer is object(a1 number)


1 row selected.
```

```
-- Evolve ADT:
alter type Usr.My_ADT add attribute (a2 number)
/

-- Show version number of evolved ADT:
select Version#||Chr(10)||Text t
from DBA_Type_Versions
where Owner = 'USR'
and Type_Name = 'MY_ADT'
/
```

Result:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
T
--------------------------------------------------------------------------------
1
type     My_ADT authid Definer is object(a1 number)

2
type     My_ADT authid Definer is object(a1 number)

2
 alter type     My_ADT add attribute (a2 number)


3 rows selected.

-- Try to enable editions for Usr:
alter user Usr enable editions
/
```

Result:

```
alter user Usr enable editions
*
ERROR at line 1:
ORA-38820: user has evolved object type

-- Reset version of ADT to 1:
alter type Usr.My_ADT reset
/

-- Show version number of reset ADT:
select Version#||Chr(10)||Text t
from DBA_Type_Versions
where Owner = 'USR'
and Type_Name = 'MY_ADT'
/
```

Result:

```
T
--------------------------------------------------------------------------------
1
type     My_ADT authid Definer is object(a1 number)

1
 alter type     My_ADT add attribute (a2 number)


2 rows selected.

-- Try to enable editions for Usr:
alter user Usr enable editions
/
```

Result:

```
User altered.
```

Related Topics

In this chapter:

- "CREATE TYPE Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

- "CREATE TYPE BODY Statement"
- "DROP TYPE Statement"

In other books:

- *Oracle Database Development Guide* for more information about editions
- *Oracle Database Development Guide* for more information about pragmas
- *Oracle Database Object-Relational Developer's Guide* for more information about the implications of not including table data when modifying type attribute

CREATE FUNCTION Statement

The `CREATE FUNCTION` statement creates or replaces a standalone function or a call specification.

A **standalone function** is a function (a subprogram that returns a single value) that is stored in the database.

> **Note**
>
> A standalone function that you create with the `CREATE FUNCTION` statement differs from a function that you declare and define in a PL/SQL block or package. For more information, see "Function Declaration and Definition" and CREATE PACKAGE Statement.

A **call specification** declares a Java method, a C function, or a JavaScript function so that it can be invoked from PL/SQL. You can also use the SQL `CALL` statement to invoke such a method or subprogram. The call specification tells the database which JavaScript function, Java method, or which named function in which shared library, to invoke when an invocation is made. It also tells the database what type conversions to make for the arguments and return value.

> **Note**
>
> To be callable from SQL statements, a stored function must obey certain rules that control side effects. See "Subprogram Side Effects".

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

To create or replace a standalone function in your schema, you must have the `CREATE PROCEDURE` system privilege.

Copyright © 1996, 2025, Oracle and/or its affiliates.

To create or replace a standalone function in another user's schema, you must have the `CREATE ANY PROCEDURE` system privilege.

To invoke a call specification, you may need additional privileges, for example, `EXECUTE` privileges on a C library for a C call specification.

To embed a `CREATE FUNCTION` statement inside an Oracle precompiler program, you must terminate the statement with the keyword `END-EXEC` followed by the embedded SQL statement terminator for the specific language.

> **See Also**
>
> For more information about such prerequisites:
>
> - *Oracle Database Development Guide*
> - *Oracle Database Java Developer's Guide*
> - *Oracle Database JavaScript Developer's Guide*

Syntax

***create_function* ::=**

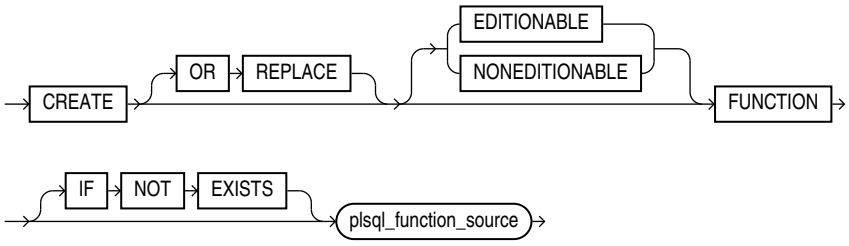

Copyright © 1996, 2025, Oracle and/or its affiliates.

***plsql_function_source* ::=**

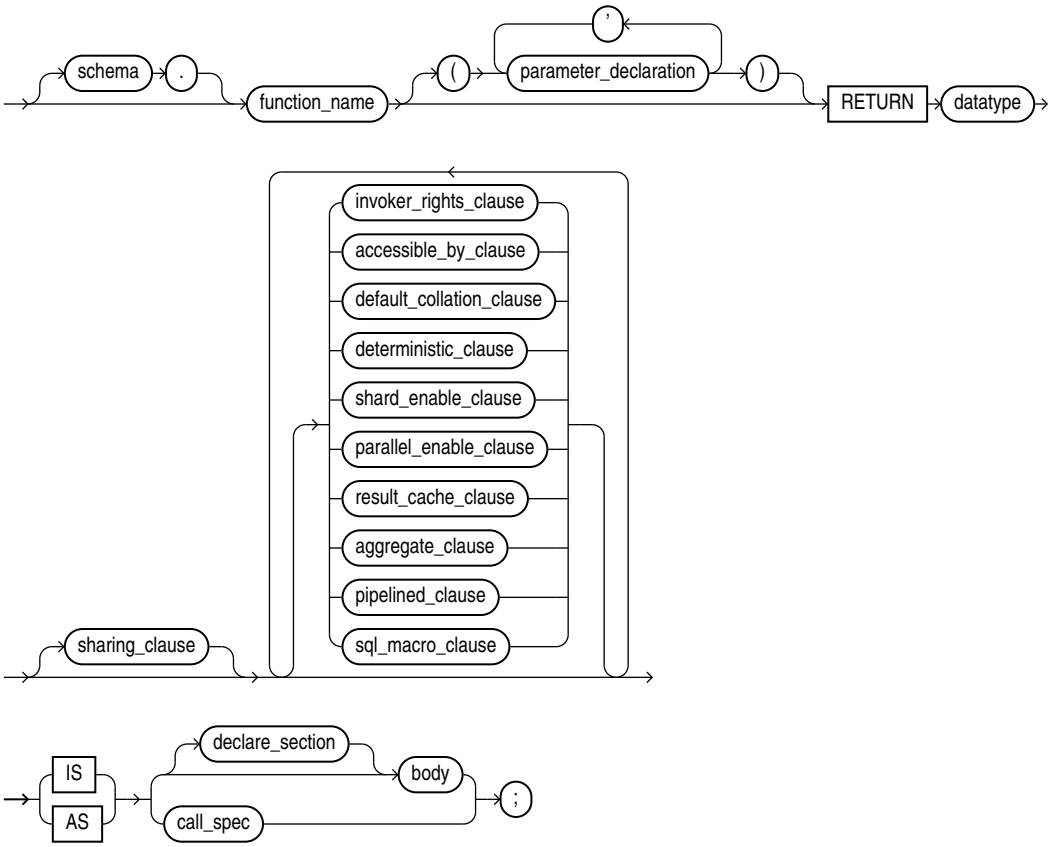

(*sharing_clause* ::= , *invoker_rights_clause* ::= , *accessible_by_clause* ::= , *default_collation_clause* ::= , *deterministic_clause* ::= , *shard_enable_clause* ::= , *parallel_enable_clause* ::= , *result_cache_clause* ::= , *aggregate_clause* ::= , *pipelined_clause* ::=, *sql_macro_clause* ::= , *body* ::= , *call_spec* ::= , *datatype* ::= , *declare_section* ::= , *parameter_declaration* ::=)

Semantics

create_function

OR REPLACE

Re-creates the function if it exists, and recompiles it.

Users who were granted privileges on the function before it was redefined can still access the function without being regranted the privileges.

If any function-based indexes depend on the function, then the database marks the indexes `DISABLED`.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the function is an editioned or noneditioned object if editioning is enabled for the schema object type `FUNCTION` in *schema*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

IF NOT EXISTS

Copyright © 1996, 2025, Oracle and/or its affiliates.

Creates the function if it does not already exist. If a function by the same name does exist, the statement is ignored without error and the original function body remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_function_source

schema

Name of the schema containing the function. **Default:** your schema.

function_name

Name of the function to be created.

> **Note**
>
> If you plan to invoke a stored subprogram using a stub generated by SQL*Module, then the stored subprogram name must also be a legal identifier in the invoking host 3GL language, such as Ada or C.

RETURN *datatype*

For *`datatype`*, specify the data type of the return value of the function. The return value can have any data type supported by PL/SQL.

The data type cannot specify a length, precision, or scale. The database derives the length, precision, or scale of the return value from the environment from which the function is called.

If the return type is `ANYDATASET` and you intend to use the function in the `FROM` clause of a query, then you must also specify the `PIPELINED` clause and define a describe method (`ODCITableDescribe`) as part of the implementation type of the function.

You cannot constrain this data type (with `NOT NULL`, for example).

body

The required executable part of the function and, optionally, the exception-handling part of the function.

declare_section

The optional declarative part of the function. Declarations are local to the function, can be referenced in *body*, and cease to exist when the function completes execution.

call_spec

The reference to a call specification mapping a C procedure, Java method name, or JavaScript function name, parameter types, and return type to their SQL counterparts.

Examples

Example 15-14 Creating a Function

This statement creates the function `get_bal` on the sample table `oe.orders`.

```
CREATE FUNCTION IF NOT EXISTS get_bal(acc_no IN NUMBER)
   RETURN NUMBER
   IS acc_bal NUMBER(11,2);
   BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      SELECT order_total
      INTO acc_bal
      FROM orders
      WHERE customer_id = acc_no;
      RETURN(acc_bal);
    END;
/
```

The `get_bal` function returns the balance of a specified account.

When you invoke the function, you must specify the argument `acc_no`, the number of the account whose balance is sought. The data type of `acc_no` is `NUMBER`.

The function returns the account balance. The `RETURN` clause of the `CREATE FUNCTION` statement specifies the data type of the return value to be `NUMBER`.

The function uses a `SELECT` statement to select the `balance` column from the row identified by the argument `acc_no` in the `orders` table. The function uses a `RETURN` statement to return this value to the environment in which the function is called.

The optional `IF NOT EXISTS` clause is used to ensure that the statement is idempotent. The resulting output message (in this case `Function created.`) is the same whether the function is created or the statement is ignored.

The function created in the preceding example can be used in a SQL statement. For example:

```
SELECT get_bal(165) FROM DUAL;

GET_BAL(165)
------------
        2519
```

Example 15-15 Creating Aggregate Functions

The next statement creates an aggregate function called `SecondMax` to aggregate over number values. It assumes that the ADT `SecondMaxImpl` subprograms contains the implementations of the `ODCIAggregate` subprograms:

```
CREATE FUNCTION SecondMax (input NUMBER) RETURN NUMBER
    PARALLEL_ENABLE AGGREGATE USING SecondMaxImpl;
```

> **See Also**
>
> *Oracle Database Data Cartridge Developer's Guide* for the complete implementation of type and type body for `SecondMaxImpl`

Use such an aggregate function in a query like this statement, which queries the sample table `hr.employees`:

```
SELECT SecondMax(salary) "SecondMax", department_id
      FROM employees
      GROUP BY department_id
      HAVING SecondMax(salary) > 9000
      ORDER BY "SecondMax", department_id;

SecondMax  DEPARTMENT_ID
---------- -------------
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
     13500            80
     17000            90
```

Example 15-16 Package Procedure in a Function

This statement creates a function that uses a `DBMS_LOB.GETLENGTH` procedure to return the length of a `CLOB` column.

```
CREATE OR REPLACE FUNCTION text_length(a CLOB)
   RETURN NUMBER DETERMINISTIC IS
BEGIN
  RETURN DBMS_LOB.GETLENGTH(a);
END;
```

Example 15-17 Creating Functions Using MLE Module and Inline Call Specifications

In this example, the same function is created in JavaScript twice. Once using an inline call specification and the other using an MLE module.

The following statement creates a JavaScript function with its declaration inline:

```
CREATE OR REPLACE FUNCTION hello_inline(
  "who" VARCHAR2
) RETURN VARCHAR2
AS MLE LANGUAGE JAVASCRIPT
{{
  return `Hello, ${who}`;
}};
/
```

You can then call the function, for example, in an anonymous block:

```
BEGIN
  DBMS_OUTPUT.PUT_LINE(hello_inline('Jane'));
END;
/

Hello, Jane
```

The following statements first create an MLE module that implements the `hello` function and then publish the function using a call specification:

```
CREATE OR REPLACE MLE MODULE hello_mod
LANGUAGE JAVASCRIPT AS
  export function hello(who){
    return `Hello, ${who}`;
  }
/

CREATE OR REPLACE FUNCTION hello(
  "p_who" VARCHAR2
) RETURN VARCHAR2
AS MLE MODULE hello_mod
SIGNATURE 'hello';
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The following is the result of a call to the `hello` function:

```
BEGIN
  DBMS_OUTPUT.PUT_LINE(hello('Emma'));
END;
/

Hello, Emma
```

Related Topics

In this chapter:

- "ALTER FUNCTION Statement"
- "CREATE PROCEDURE Statement"
- "DROP FUNCTION Statement"

In other chapters:

- Overview of Polymorphic Table Functions
- "Function Declaration and Definition" for information about creating a function in a PL/SQL block
- "Formal Parameter Declaration"
- "PL/SQL Subprograms"

In other books:

- *Oracle Database SQL Language Reference* for information about the `CALL` statement
- *Oracle Database Development Guide* for information about restrictions on user-defined functions that are called from SQL statements
- *Oracle Database Development Guide* for more information about call specifications
- *Oracle Database Data Cartridge Developer's Guide* for information about defining the `ODCITableDescribe` function
- *Oracle AI Database JavaScript Developer's Guide* for information about call specifications for MLE modules and inline MLE call specifications
- *Oracle AI Database Java Developer's Guide* for information about call specifications for Java stored procedures

CREATE LIBRARY Statement

The `CREATE LIBRARY` statement creates a **library**, which is a schema object associated with an operating-system shared library.

> **Note**
>
> The `CREATE LIBRARY` statement is valid only on platforms that support shared libraries and dynamic linking.

Copyright © 1996, 2025, Oracle and/or its affiliates.

For instructions for creating an operating-system shared library, or DLL, see *Oracle Database Development Guide*.

You can use the name of the library schema object in the *call_spec* of `CREATE FUNCTION` or `CREATE PROCEDURE` statements, or when declaring a function or procedure in a package or type, so that SQL and PL/SQL can invoke third-generation-language (3GL) functions and procedures.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

To create a library in your schema, you must have the `CREATE LIBRARY` system privilege. To create a library in another user's schema, you must have the `CREATE ANY LIBRARY` system privilege.

To create a library that is associated with a DLL in a directory object, you must have the `EXECUTE` object privilege on the directory object.

To create a library that is associated with a credential name, you must have the `EXECUTE` object privilege on the credential name.

To use the library in the *call_spec* of a `CREATE FUNCTION` statement, or when declaring a function in a package or type, you must have the `EXECUTE` object privilege on the library and the `CREATE FUNCTION` system privilege.

To use the library in the *call_spec* of a `CREATE PROCEDURE` statement, or when declaring a procedure in a package or type, you must have the `EXECUTE` object privilege on the library and the `CREATE PROCEDURE` system privilege.

To run a procedure or function defined with the *call_spec* (including a procedure or function defined within a package or type), you must have the `EXECUTE` object privilege on the procedure or function (but you do not need the `EXECUTE` object privilege on the library).

Syntax

***create_library* ::=**

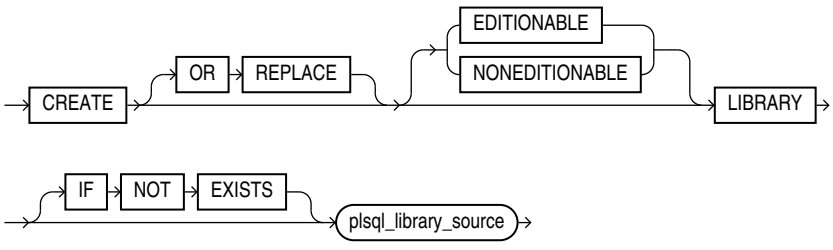

Copyright © 1996, 2025, Oracle and/or its affiliates.

***plsql_library_source* ::=**

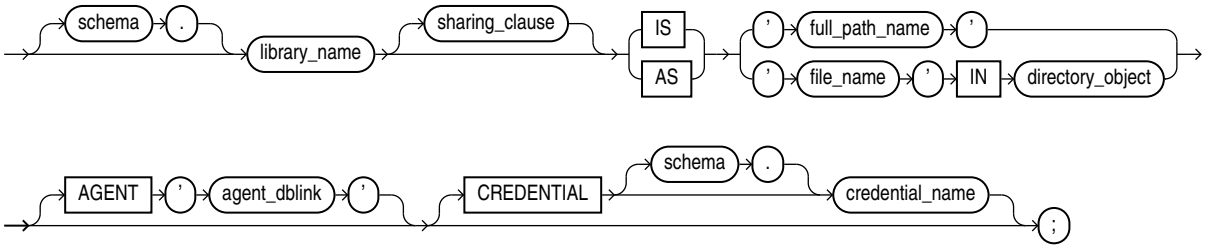

(*sharing_clause* ::=)

Semantics

create_library

OR REPLACE

Re-creates the library if it exists, and recompiles it.

Users who were granted privileges on the library before it was redefined can still access it without being regranted the privileges.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the library is an editioned or noneditioned object if editioning is enabled for the schema object type `LIBRARY` in *schema*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

IF NOT EXISTS

Creates the library if it does not already exist. If a library by the same name does exist, the statement is ignored without error and the original library remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_library_source

schema

Name of the schema containing the library. **Default:** your schema.

library_name

Name that represents this library when a user declares a function or procedure with a *call_spec*.

'*full_path_name*'

String literal enclosed in single quotation marks, whose value your operating system recognizes as the full path name of a shared library.

The *full_path_name* is not interpreted during execution of the `CREATE LIBRARY` statement. The existence of the shared library is checked when someone invokes one of its subprograms.

'*file_name*' IN *directory_object*

The *file_name* is a string literal enclosed in single quotation marks, whose value is the name of a dynamic link library (DLL) in *directory_object*. The string literal cannot exceed 2,000

Copyright © 1996, 2025, Oracle and/or its affiliates.

bytes and cannot contain path delimiters. The compiler ignores *file_name*, but at run time, *file_name* is checked for path delimiters.

directory_object

The *directory_object* is a directory object, created with the CREATE DIRECTORY statement (described in *Oracle Database SQL Language Reference*). If *directory_object* does not exist or you do not have the EXECUTE object privilege on *directory_object*, then the library is created with errors. If *directory_object* is subsequently created, then the library becomes invalid. Other reasons that the library can become invalid are:

- *directory_object* is dropped.
- *directory_object* becomes invalid.
- Your EXECUTE object privilege on *directory_object* is revoked.

If you create a library object in a PDB that has a predefined PATH_PREFIX, the library must use a directory object. The directory object will enforce the rules of PATH_PREFIX for the library object. Failure to use a directory object in the library object will raise a compilation error.

If a database is plugged into a CDB as a PDB with a predefined PATH_PREFIX, attempts to use a library object that does not use a directory object result in an ORA-65394 error. The library object will not be invalidated, but to make it usable, you must recreate it using a directory object. See *Oracle Multitenant Administrator's Guide* for more information about CDB administration.

AGENT '*agent_dblink*'

Causes external procedures to run from a database link other than the server. Oracle Database uses the database link that *agent_dblink* specifies to run external procedures. If you omit this clause, then the default agent on the server (extproc) runs external procedures.

CREDENTIAL [*schema*.]*credential_name*

Specifies the credentials of the operating system user that the extproc agent impersonates when running an external subprogram that specifies the library. **Default:** Owner of the Oracle Database installation.

If *credential_name* does not exist or you do not have the EXECUTE object privilege on *credential_name*, then the library is created with errors. If *credential_name* is subsequently created, then the library becomes invalid. Other reasons that the library can become invalid are:

- *credential_name* is dropped.
- *credential_name* becomes invalid.
- Your EXECUTE object privilege on *credential_name* is revoked.

For information about using credentials, see *Oracle Database Security Guide*.

Examples

Example 15-18 Creating a Library

The following statement creates library ext_lib, using a directory object:

```
CREATE LIBRARY IF NOT EXISTS ext_lib AS 'ddl_1' IN ddl_dir;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The optional `IF NOT EXISTS` clause is used to ensure that the statement is idempotent. The resulting output message (in this case `Library created`) is the same whether the library is created or the statement is ignored.

The following statement re-creates library `ext_lib`, using a directory object and a credential:

```
CREATE OR REPLACE LIBRARY ext_lib AS 'ddl_1' IN ddl_dir CREDENTIAL ddl_cred;
/
```

The following statement creates library `ext_lib`, using an explicit path:

```
CREATE LIBRARY ext_lib AS '/OR/lib/ext_lib.so';
/
```

The following statement re-creates library `ext_lib`, using an explicit path:

```
CREATE OR REPLACE LIBRARY ext_lib IS '/OR/newlib/ext_lib.so';
/
```

Example 15-19 Specifying an External Procedure Agent

The following example creates a library `app_lib` (using an explicit path) and specifies that external procedures run from the public database `sales.hq.example.com`:

```
CREATE LIBRARY app_lib as '${ORACLE_HOME}/lib/app_lib.so'
   AGENT 'sales.hq.example.com';
/
```

> **See Also**
>
> *Oracle Database SQL Language Reference* for information about creating database links

Related Topics

- "ALTER LIBRARY Statement"
- "DROP LIBRARY Statement"
- "CREATE FUNCTION Statement"
- "CREATE PROCEDURE Statement"

CREATE PACKAGE Statement

The `CREATE PACKAGE` statement creates or replaces the specification for a stored **package**, which is an encapsulated collection of related procedures, functions, and other program objects stored as a unit in the database.

The **package specification** declares these objects. The **package body**, specified subsequently, defines these objects.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

To create or replace a package in your schema, you must have the `CREATE PROCEDURE` system privilege. To create or replace a package in another user's schema, you must have the `CREATE ANY PROCEDURE` system privilege.

To embed a `CREATE PACKAGE` statement inside an Oracle database precompiler program, you must terminate the statement with the keyword `END-EXEC` followed by the embedded SQL statement terminator for the specific language.

Syntax

***create_package* ::=**

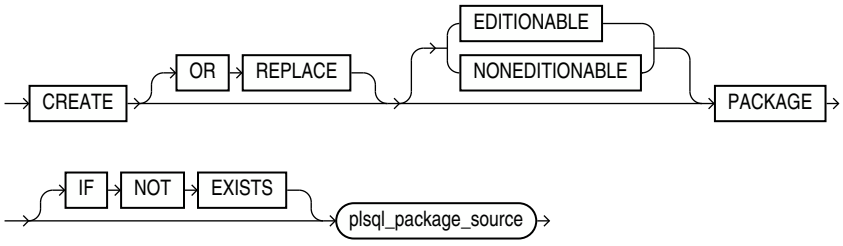

***plsql_package_source* ::=**

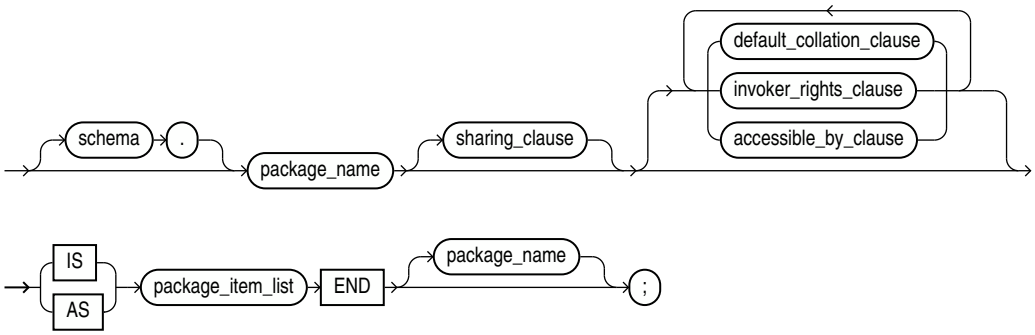

(*sharing_clause* ::= , *default_collation_clause* ::= , *invoker_rights_clause* ::= , *accessible_by_clause* ::= ,)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***package_item_list* ::=**

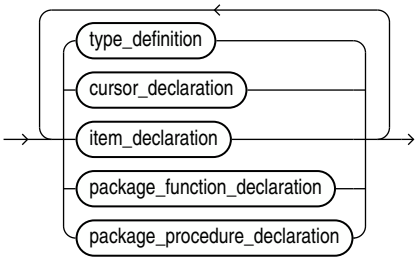

(*cursor_declaration* ::= , *item_declaration* ::= , *type_definition* ::=)

***package_function_declaration* ::=**

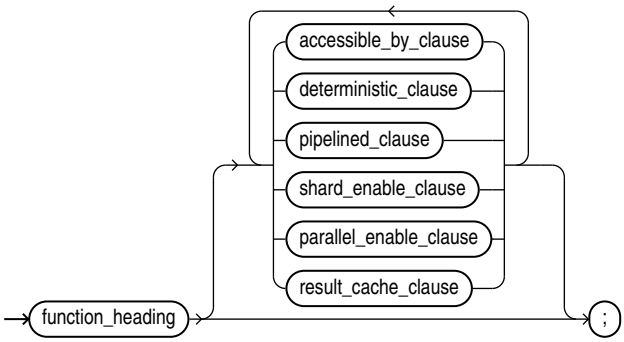

(*function_heading* ::= , *accessible_by_clause* ::= , *deterministic_clause* ::= , *pipelined_clause* ::= , *shard_enable_clause* ::= , *parallel_enable_clause* ::= , *result_cache_clause* ::=)

***package_procedure_declaration* ::=**



(*procedure_heading* ::=, *accessible_by_clause* ::=)

Semantics

create_package

OR REPLACE

Re-creates the package if it exists, and recompiles it.

Users who were granted privileges on the package before it was redefined can still access the package without being regranted the privileges.

Copyright © 1996, 2025, Oracle and/or its affiliates.

If any function-based indexes depend on the package, then the database marks the indexes `DISABLED`.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the package is an editioned or noneditioned object if editioning is enabled for the schema object type `PACKAGE` in *`schema`*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

IF NOT EXISTS

Creates the package if it does not already exist. If a package by the same name does exist, the statement is ignored without error and the original package remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_package_source

schema

Name of the schema containing the package. **Default:** your schema.

package_name

A package stored in the database. For naming conventions, see "Identifiers".

package_item_list

Defines every type in the package and declares every cursor and subprogram in the package. Except for polymorphic table functions, every declaration must have a corresponding definition in the package body. The headings of corresponding declarations and definitions must match word for word, except for white space. Package polymorphic table function must be declared in the same package as their implementation package.

Restriction on *package_item_list*

`PRAGMA AUTONOMOUS_TRANSACTION` cannot appear here.

Example

Example 15-20 Creating the Specification for the emp_mgmt Package

This statement creates the specification of the `emp_mgmt` package.

```
CREATE PACKAGE IF NOT EXISTS emp_mgmt AS
   FUNCTION hire (last_name VARCHAR2, job_id VARCHAR2,
      manager_id NUMBER, salary NUMBER,
      commission_pct NUMBER, department_id NUMBER)
      RETURN NUMBER;
   FUNCTION create_dept(department_id NUMBER, location_id NUMBER)
      RETURN NUMBER;
   PROCEDURE remove_emp(employee_id NUMBER);
   PROCEDURE remove_dept(department_id NUMBER);
   PROCEDURE increase_sal(employee_id NUMBER, salary_incr NUMBER);
   PROCEDURE increase_comm(employee_id NUMBER, comm_incr NUMBER);
   no_comm EXCEPTION;
   no_sal EXCEPTION;
END emp_mgmt;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The specification for the `emp_mgmt` package declares these public program objects:

- The functions `hire` and `create_dept`
- The procedures `remove_emp`, `remove_dept`, `increase_sal`, and `increase_comm`
- The exceptions `no_comm` and `no_sal`

All of these objects are available to users who have access to the package. After creating the package, you can develop applications that invoke any of these public procedures or functions or raise any of the public exceptions of the package.

The optional `IF NOT EXISTS` clause is used to ensure that the statement is idempotent. The resulting output message (in this case `Package created`) is the same whether the package is created or the statement is ignored.

Before you can invoke this package's procedures and functions, you must define these procedures and functions in the package body. For an example of a `CREATE PACKAGE BODY` statement that creates the body of the `emp_mgmt` package, see "CREATE PACKAGE BODY Statement".

Related Topics

In this chapter:

- "ALTER PACKAGE Statement"
- "CREATE PACKAGE Statement"
- "CREATE PACKAGE BODY Statement"
- "DROP PACKAGE Statement"

In other chapters:

- "PL/SQL Packages"
- "Package Specification"
- "Function Declaration and Definition"
- "Procedure Declaration and Definition"

CREATE PACKAGE BODY Statement

The `CREATE PACKAGE BODY` statement creates or replaces the body of a stored **package**, which is an encapsulated collection of related procedures, stored functions, and other program objects stored as a unit in the database.

The **package body** defines these objects. The **package specification**, defined in an earlier `CREATE PACKAGE` statement, declares these objects.

Packages are an alternative to creating procedures and functions as standalone schema objects.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Related Topics

Prerequisites

To create or replace a package in your schema, you must have the `CREATE PROCEDURE` system privilege. To create or replace a package in another user's schema, you must have the `CREATE ANY PROCEDURE` system privilege. In both cases, the package body must be created in the same schema as the package.

To embed a `CREATE PACKAGE BODY` statement inside an the database precompiler program, you must terminate the statement with the keyword `END-EXEC` followed by the embedded SQL statement terminator for the specific language.

Syntax

***create_package_body* ::=**

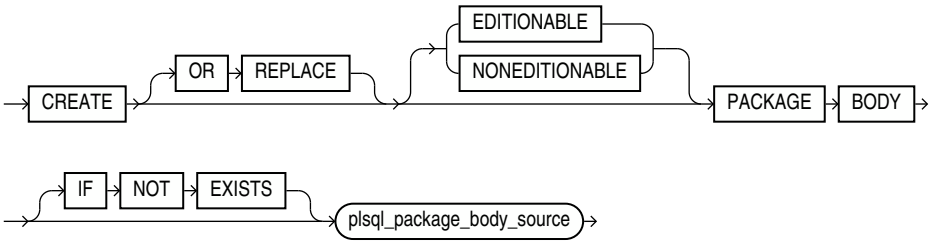

***plsql_package_body_source* ::=**

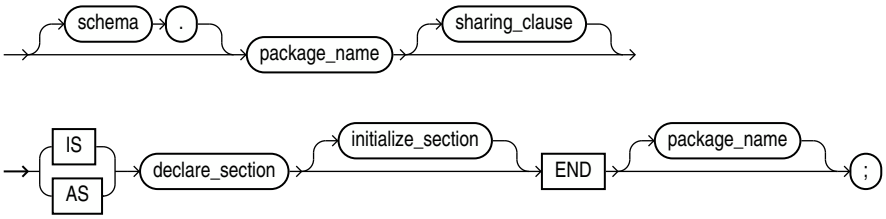

(*sharing_clause ::=*, *declare_section ::=*)

***initialize_section* ::=**



(*statement ::=* , *exception_handler ::=*)

Semantics

create_package_body

OR REPLACE

Copyright © 1996, 2025, Oracle and/or its affiliates.

Re-creates the package body if it exists, and recompiles it.

Users who were granted privileges on the package body before it was redefined can still access the package without being regranted the privileges.

[EDITIONABLE | NONEDITIONABLE]

If you do not specify this property, then the package body inherits `EDITIONABLE` or `NONEDITIONABLE` from the package specification. If you do specify this property, then it must match that of the package specification.

IF NOT EXISTS

Creates the package body if it does not already exist. If a package body by the same name does exist, the statement is ignored without error and the original package body remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_package_body_source

schema

Name of the schema containing the package. **Default:** your schema.

package_name

Name of the package to be created.

declare_section

Has a definition for every cursor and subprogram declaration in the package specification. The headings of corresponding subprogram declarations and definitions must match word for word, except for white space.

Can also declare and define private items that can be referenced only from inside the package.

Restriction on *declare_section*

`PRAGMA AUTONOMOUS_TRANSACTION` cannot appear here.

initialize_section

Initializes variables and does any other one-time setup steps.

Examples

Example 15-21 Creating the emp_mgmt Package Body

This statement creates the body of the `emp_mgmt` package created in "Example 15-20".

```
CREATE OR REPLACE PACKAGE BODY emp_mgmt AS
   tot_emps NUMBER;
   tot_depts NUMBER;
FUNCTION hire
   (last_name VARCHAR2, job_id VARCHAR2,
    manager_id NUMBER, salary NUMBER,
    commission_pct NUMBER, department_id NUMBER)
   RETURN NUMBER IS new_empno NUMBER;
BEGIN
   SELECT employees_seq.NEXTVAL
      INTO new_empno
      FROM DUAL;
   INSERT INTO employees
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
      VALUES (new_empno, 'First', 'Last','first.example@example.com',
              '(415)555-0100',
              TO_DATE('18-JUN-2002','DD-MON-YYYY'),
              'IT_PROG',90000000,00, 100,110);
      tot_emps := tot_emps + 1;
   RETURN(new_empno);
END;
FUNCTION create_dept(department_id NUMBER, location_id NUMBER)
   RETURN NUMBER IS
      new_deptno NUMBER;
   BEGIN
      SELECT departments_seq.NEXTVAL
         INTO new_deptno
         FROM dual;
      INSERT INTO departments
         VALUES (new_deptno, 'department name', 100, 1700);
      tot_depts := tot_depts + 1;
      RETURN(new_deptno);
   END;
PROCEDURE remove_emp (employee_id NUMBER) IS
   BEGIN
      DELETE FROM employees
      WHERE employees.employee_id = remove_emp.employee_id;
      tot_emps := tot_emps - 1;
   END;
PROCEDURE remove_dept(department_id NUMBER) IS
   BEGIN
      DELETE FROM departments
      WHERE departments.department_id = remove_dept.department_id;
      tot_depts := tot_depts - 1;
      SELECT COUNT(*) INTO tot_emps FROM employees;
   END;
PROCEDURE increase_sal(employee_id NUMBER, salary_incr NUMBER) IS
   curr_sal NUMBER;
   BEGIN
      SELECT salary INTO curr_sal FROM employees
      WHERE employees.employee_id = increase_sal.employee_id;
      IF curr_sal IS NULL
         THEN RAISE no_sal;
      ELSE
         UPDATE employees
         SET salary = salary + salary_incr
         WHERE employee_id = employee_id;
      END IF;
   END;
PROCEDURE increase_comm(employee_id NUMBER, comm_incr NUMBER) IS
   curr_comm NUMBER;
   BEGIN
      SELECT commission_pct
      INTO curr_comm
      FROM employees
      WHERE employees.employee_id = increase_comm.employee_id;
      IF curr_comm IS NULL
         THEN RAISE no_comm;
      ELSE
         UPDATE employees
         SET commission_pct = commission_pct + comm_incr;
      END IF;
   END;
END emp_mgmt;
```

The package body defines the public program objects declared in the package specification:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- The functions `hire` and `create_dept`
- The procedures `remove_emp`, `remove_dept`, `increase_sal`, and `increase_comm`

These objects are declared in the package specification, so they can be called by application programs, procedures, and functions outside the package. For example, if you have access to the package, you can create a procedure `increase_all_comms` separate from the `emp_mgmt` package that invokes the `increase_comm` procedure.

These objects are defined in the package body, so you can change their definitions without causing the database to invalidate dependent schema objects. For example, if you subsequently change the definition of `hire`, then the database need not recompile `increase_all_comms` before running it.

The package body in this example also declares private program objects, the variables `tot_emps` and `tot_depts`. These objects are declared in the package body rather than the package specification, so they are accessible to other objects in the package, but they are not accessible outside the package. For example, you cannot develop an application that explicitly changes the value of the variable `tot_depts`. However, the function `create_dept` is part of the package, so `create_dept` can change the value of `tot_depts`.

Related Topics

In this chapter:

- "CREATE PACKAGE Statement"

In other chapters:

- "PL/SQL Packages"
- "Package Body"
- "Function Declaration and Definition"
- "Procedure Declaration and Definition"

CREATE PROCEDURE Statement

The `CREATE PROCEDURE` statement creates or replaces a standalone procedure or a call specification.

A **standalone procedure** is a procedure (a subprogram that performs a specific action) that is stored in the database.

> **Note**
>
> A standalone procedure that you create with the `CREATE PROCEDURE` statement differs from a procedure that you declare and define in a PL/SQL block or package. For information, see "Procedure Declaration and Definition" or "CREATE PACKAGE Statement".

A **call specification** declares a Java method, a C function, or a JavaScript function so that it can be called from PL/SQL. You can also use the SQL `CALL` statement to invoke such a method or subprogram. The call specification tells the database which JavaScript function, Java method, or which named procedure in which shared library, to invoke when an invocation is made. It also tells the database what type conversions to make for the arguments and return value.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

To create or replace a standalone procedure in your schema, you must have the `CREATE PROCEDURE` system privilege. To create or replace a standalone procedure in another user's schema, you must have the `CREATE ANY PROCEDURE` system privilege.

To invoke a call specification, you may need additional privileges, for example, the `EXECUTE` object privilege on the C library for a C call specification.

To embed a `CREATE PROCEDURE` statement inside an Oracle precompiler program, you must terminate the statement with the keyword `END-EXEC` followed by the embedded SQL statement terminator for the specific language.

> **See Also**
>
> For more information about such prerequisites:
>
> - *Oracle Database Development Guide*
> - *Oracle Database Java Developer's Guide*
> - *Oracle Database JavaScript Developer's Guide*

Syntax

***create_procedure* ::=**

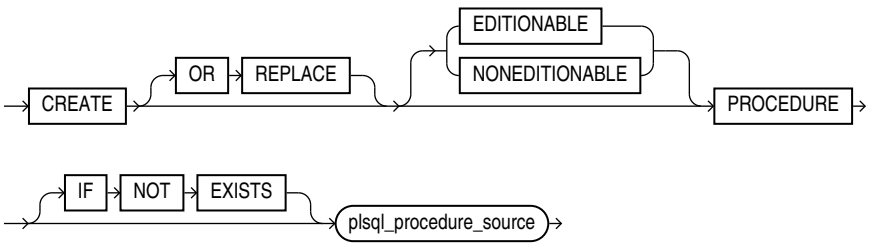

Copyright © 1996, 2025, Oracle and/or its affiliates.

***plsql_procedure_source* ::=**

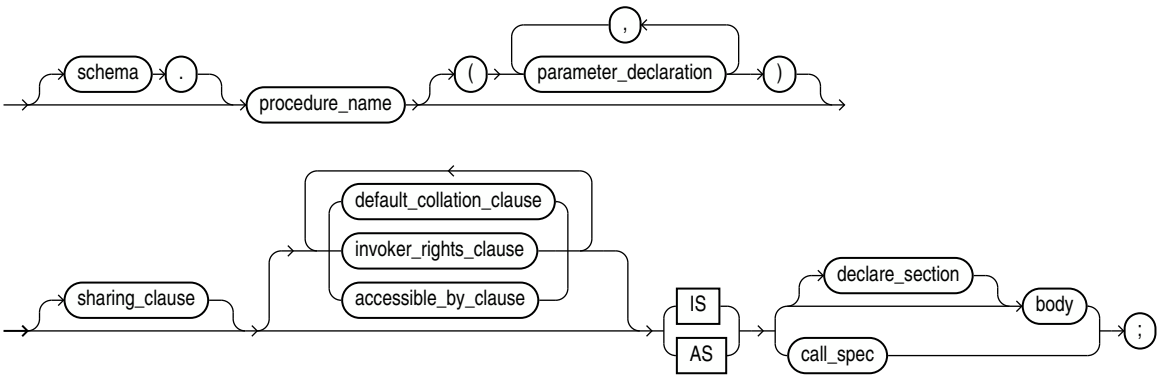

(*sharing_clause* ::=, *default_collation_clause* ::=, *invoker_rights_clause* ::=, *accessible_by_clause* ::=, *call_spec* ::=, *body* ::=, *declare_section* ::=, *parameter_declaration* ::=)

Semantics

create_procedure

OR REPLACE

Re-creates the procedure if it exists, and recompiles it.

Users who were granted privileges on the procedure before it was redefined can still access the procedure without being regranted the privileges.

If any function-based indexes depend on the procedure, then the database marks the indexes `DISABLED`.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the procedure is an editioned or noneditioned object if editioning is enabled for the schema object type `PROCEDURE` in *schema*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

IF NOT EXISTS

Creates the procedure if it does not already exist. If a procedure by the same name does exist, the statement is ignored without error and the original procedure remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_procedure_source

schema

Name of the schema containing the procedure. **Default:** your schema.

procedure_name

Name of the procedure to be created.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If you plan to invoke a stored subprogram using a stub generated by SQL*Module, then the stored subprogram name must also be a legal identifier in the invoking host 3GL language, such as Ada or C.

body

The required executable part of the procedure and, optionally, the exception-handling part of the procedure.

declare_section

The optional declarative part of the procedure. Declarations are local to the procedure, can be referenced in *body*, and cease to exist when the procedure completes execution.

call_spec

The reference to a call specification mapping a C procedure, Java method name, or JavaScript function name, parameter types, and return type to their SQL counterparts.

Examples

Example 15-22 Creating a Procedure

This statement creates the procedure `remove_emp` in the schema `hr`.

```
CREATE PROCEDURE IF NOT EXISTS remove_emp (employee_id NUMBER) AS
   tot_emps NUMBER;
   BEGIN
      DELETE FROM employees
      WHERE employees.employee_id = remove_emp.employee_id;
   tot_emps := tot_emps - 1;
   END;
/
```

The `remove_emp` procedure removes a specified employee. When you invoke the procedure, you must specify the `employee_id` of the employee to be removed.

The procedure uses a `DELETE` statement to remove from the `employees` table the row of `employee_id`.

The optional `IF NOT EXISTS` clause is used to ensure that the statement is idempotent. The resulting output message (in this case `Procedure created`) is the same whether the procedure is created or the statement is ignored.

> **See Also**
>
> "CREATE PACKAGE BODY Statement" to see how to incorporate this procedure into a package

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 15-23 Creating an External Procedure

In this example, external procedure `c_find_root` expects a pointer as a parameter. Procedure `find_root` passes the parameter by reference using the `BY REFERENCE` phrase.

```
CREATE PROCEDURE find_root
   ( x IN REAL )
   IS LANGUAGE C
      NAME c_find_root
      LIBRARY c_utils
      PARAMETERS ( x BY REFERENCE );
```

Example 15-24 Creating Procedures Using MLE Module and Inline Call Specifications

In this example, the same procedure is created in JavaScript twice. Once using an inline call specification and the other using an MLE module.

The following statement creates a JavaScript function with its declaration inline:

```
CREATE OR REPLACE PROCEDURE hello_inline(
  "who" VARCHAR2
)
AS MLE LANGUAGE JAVASCRIPT
{{
  console.log(`Hello, ${who}`);
}};
/
```

You can then call the procedure, as in the following:

```
EXEC hello_inline('Angela');
```

Result:

```
Hello, Angela
```

The following statements first create an MLE module that implements the `hello` function and then publish the procedure using a call specification:

```
CREATE OR REPLACE MLE MODULE hello_mod
LANGUAGE JAVASCRIPT AS
  export function hello(who){
    console.log(`Hello, ${who}`);
  }
/

CREATE OR REPLACE PROCEDURE hello(
  "p_who" VARCHAR2
)
AS MLE MODULE hello_mod
SIGNATURE 'hello';
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The following is an example of a call to the `hello` procedure:

```
EXEC hello('Chris');
```

Result:

```
Hello, Chris
```

Related Topics

In this chapter:

- "ALTER PROCEDURE Statement"
- "CREATE FUNCTION Statement"
- "DROP PROCEDURE Statement"

In other chapters:

- "Formal Parameter Declaration"
- "Procedure Declaration and Definition"
- "PL/SQL Subprograms"

In other books:

- *Oracle Database SQL Language Reference* for information about the `CALL` statement
- *Oracle Database Development Guide* for more information about call specifications
- *Oracle Database Development Guide* for more information about invoking stored PL/SQL subprograms
- *Oracle AI Database JavaScript Developer's Guide* for information about call specifications for MLE modules and inline MLE call specifications
- *Oracle AI Database Java Developer's Guide* for information about call specifications for Java stored procedures

CREATE TRIGGER Statement

The `CREATE TRIGGER` statement creates or replaces a **database trigger**, which is either of these:

- A stored PL/SQL block associated with a table, a view, a schema, or the database
- An anonymous PL/SQL block or an invocation of a procedure implemented in PL/SQL or Java

The database automatically runs a trigger when specified conditions occur.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Copyright © 1996, 2025, Oracle and/or its affiliates.

Prerequisites

- To create a trigger in your schema on a table in your schema or on your schema (`SCHEMA`), you must have the `CREATE TRIGGER` system privilege.
- To create a trigger in any schema on a table in any schema, or on another user's schema (*schema*.`SCHEMA`), you must have the `CREATE ANY TRIGGER` system privilege.
- In addition to the preceding privileges, to create a trigger on `DATABASE`, you must have the `ADMINISTER DATABASE TRIGGER` system privilege.
- To create a trigger on a pluggable database (PDB), you must be connected to that PDB and have the `ADMINISTER DATABASE TRIGGER` system privilege. For information about PDBs, see *Oracle Database Administrator's Guide*.
- In addition to the preceding privileges, to create a crossedition trigger, you must be enabled for editions. For information about enabling editions for a user, see *Oracle Database Development Guide*.

If the trigger issues SQL statements or invokes procedures or functions, then the owner of the trigger must have the privileges necessary to perform these operations. These privileges must be granted directly to the owner rather than acquired through roles.

Syntax

***create_trigger* ::=**

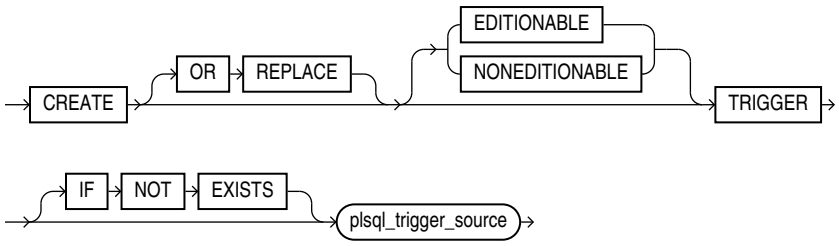

***plsql_trigger_source* ::=**

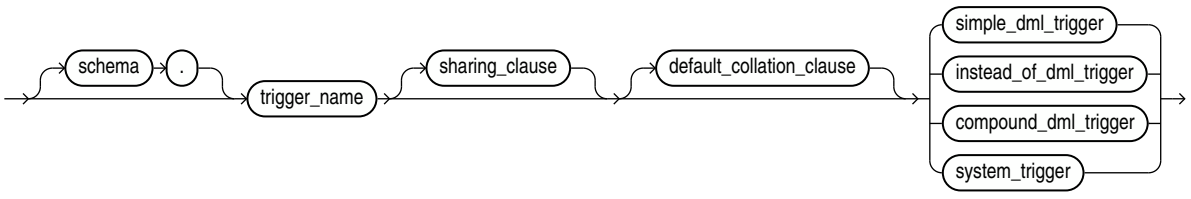

(*sharing_clause* ::= , *default_collation_clause* ::= , *compound_dml_trigger* ::= , *instead_of_dml_trigger* ::= , *system_trigger* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***simple_dml_trigger* ::=**

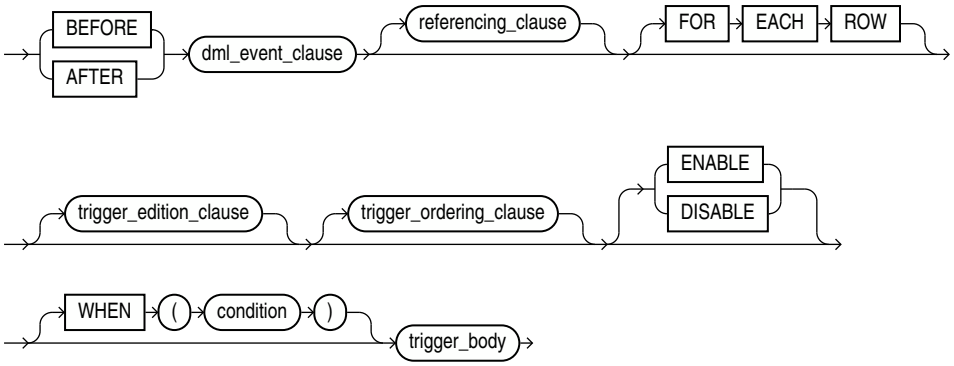

(*dml_event_clause* ::= , *referencing_clause* ::= , *trigger_body* ::= , *trigger_edition_clause* ::= , *trigger_ordering_clause* ::=)

***instead_of_dml_trigger* ::=**

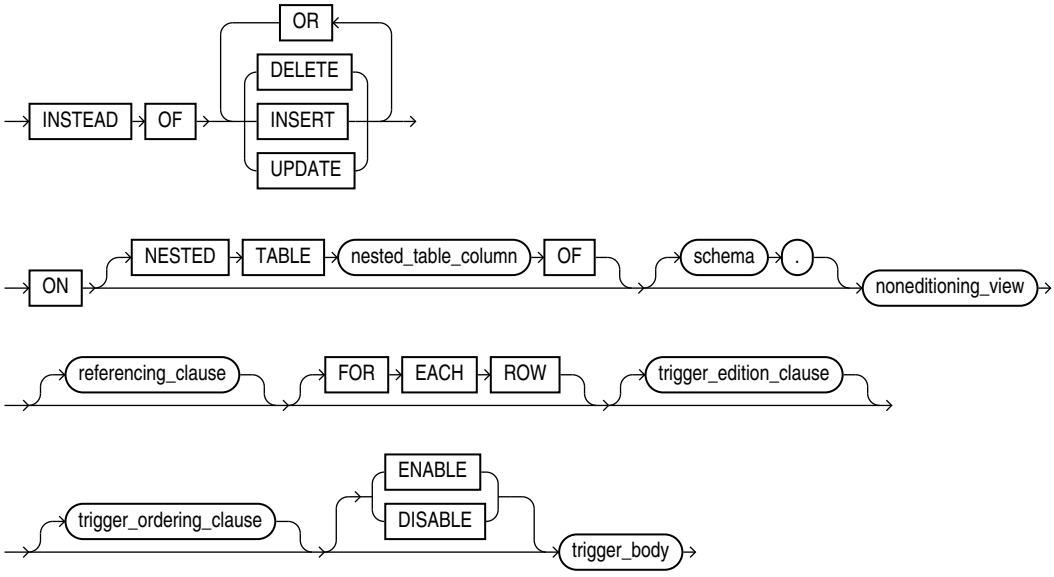

(*referencing_clause* ::= , *trigger_body* ::= , *trigger_edition_clause* ::= , *trigger_ordering_clause* ::=)

***compound_dml_trigger* ::=**

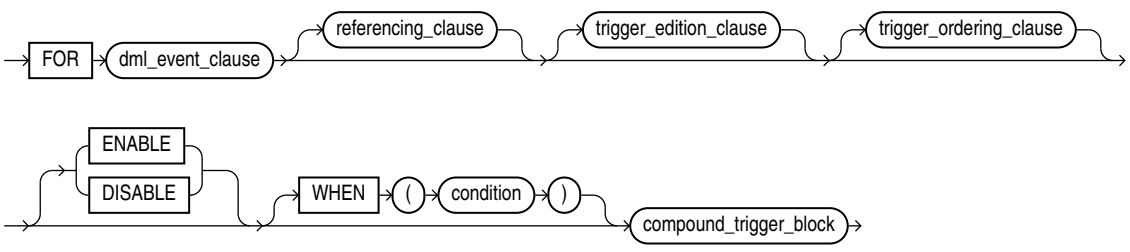

Copyright © 1996, 2025, Oracle and/or its affiliates.

(*compound_trigger_block* ::= , *dml_event_clause* ::= , *referencing_clause* ::= , *trigger_edition_clause* ::= , *trigger_ordering_clause* ::=)

***system_trigger* ::=**

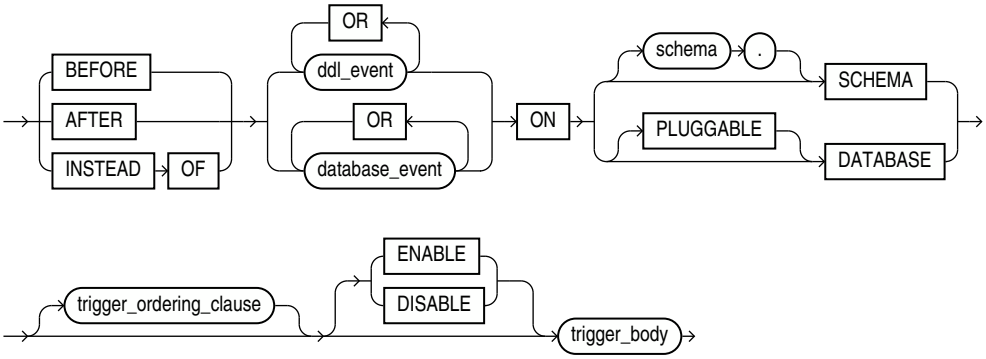

(*trigger_body* ::= , *trigger_ordering_clause* ::=)

***dml_event_clause* ::=**

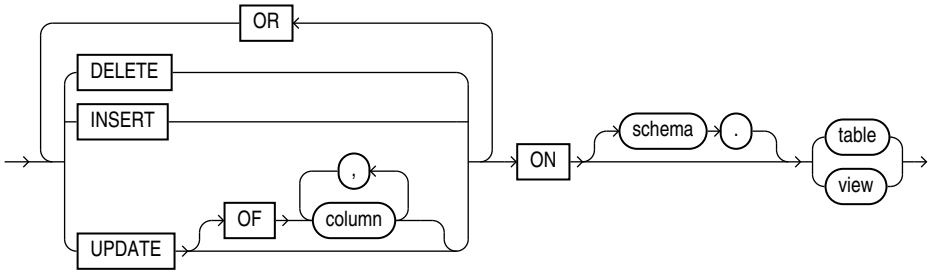

***referencing_clause* ::=**

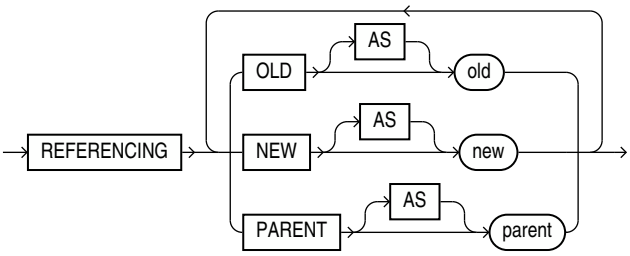

***trigger_edition_clause* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

trigger_ordering_clause **::=**

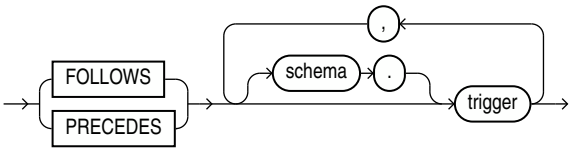

trigger_body **::=**



(*plsql_block ::=* ,

`routine_clause` in *Oracle Database SQL Language Reference*)

compound_trigger_block **::=**



(*declare_section ::=*)

timing_point_section **::=**



timing_point **::=**

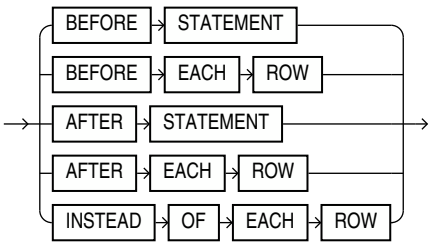

tps_body **::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

(*exception_handler* ::= , *statement* ::=)

Semantics

create_trigger

OR REPLACE

Re-creates the trigger if it exists, and recompiles it.

Users who were granted privileges on the trigger before it was redefined can still access the procedure without being regranted the privileges.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the trigger is an editioned or noneditioned object if editioning is enabled for the schema object type `TRIGGER` in *schema*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

Restriction on NONEDITIONABLE

You cannot specify `NONEDITIONABLE` for a crossedition trigger.

IF NOT EXISTS

Creates the trigger if it does not already exist. If a trigger by the same name does exist, the statement is ignored without error and the original trigger remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

Restrictions on *create_trigger*

See "Trigger Restrictions".

plsql_trigger_source

schema

Name of the schema for the trigger to be created. **Default:** your schema.

trigger

Name of the trigger to be created.

Triggers in the same schema cannot have the same names. Triggers can have the same names as other schema objects—for example, a table and a trigger can have the same name—however, to avoid confusion, this is not recommended.

If a trigger produces compilation errors, then it is still created, but it fails on execution. A trigger that fails on execution effectively blocks all triggering DML statements until it is disabled, replaced by a version without compilation errors, or dropped. You can see the associated compiler error messages with the SQL*Plus command `SHOW ERRORS`.

> **Note**
>
> If you create a trigger on a base table of a materialized view, then you must ensure that the trigger does not fire during a refresh of the materialized view. During refresh, the `DBMS_MVIEW` procedure `I_AM_A_REFRESH` returns `TRUE`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

simple_dml_trigger

Creates a simple DML trigger (described in "DML Triggers").

BEFORE

Causes the database to fire the trigger before running the triggering event. For row triggers, the trigger fires before each affected row is changed.

Restrictions on BEFORE

- You cannot specify a `BEFORE` trigger on a view unless it is an editioning view.
- In a `BEFORE` statement trigger, the trigger body cannot read `:NEW` or `:OLD`. (In a `BEFORE` row trigger, the trigger body can read and write the `:OLD` and `:NEW` fields.)

AFTER

Causes the database to fire the trigger after running the triggering event. For row triggers, the trigger fires after each affected row is changed.

Restrictions on AFTER

- You cannot specify an `AFTER` trigger on a view unless it is an editioning view.
- In an `AFTER` statement trigger, the trigger body cannot read `:NEW` or `:OLD`. (In an `AFTER` row trigger, the trigger body can read but not write the `:OLD` and `:NEW` fields.)

> **Note**
>
> When you create a materialized view log for a table, the database implicitly creates an `AFTER` row trigger on the table. This trigger inserts a row into the materialized view log whenever an `INSERT`, `UPDATE`, or `DELETE` statement modifies data in the associated table. You cannot control the order in which multiple row triggers fire. Therefore, do not write triggers intended to affect the content of the materialized view.

> **See Also**
>
> - *Oracle Database SQL Language Reference* for more information about materialized view logs
> - *Oracle Database Development Guide* for information about editioning views

FOR EACH ROW

Creates the trigger as a row trigger. The database fires a row trigger for each row that is affected by the triggering statement and meets the optional trigger constraint defined in the `WHEN` condition.

If you omit this clause, then the trigger is a statement trigger. The database fires a statement trigger only when the triggering statement is issued if the optional trigger constraint is met.

[ENABLE | DISABLE]

Creates the trigger in an enabled (default) or disabled state. Creating a trigger in a disabled state lets you ensure that the trigger compiles without errors before you enable it.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> `DISABLE` is especially useful if you are creating a crossedition trigger, which affects the online application being redefined if compilation errors occur.

WHEN (*condition*)

Specifies a SQL condition that the database evaluates for each row that the triggering statement affects. If the value of *condition* is `TRUE` for an affected row, then *trigger_body* runs for that row; otherwise, *trigger_body* does not run for that row. The triggering statement runs regardless of the value of *condition*.

The *condition* can contain correlation names (see "*referencing_clause ::=*").

In *`condition`*, do not put a colon (:) before the correlation name `NEW`, `OLD`, or `PARENT` (in this context, it is not a placeholder for a bind variable).

> **See Also**
>
> *Oracle Database SQL Language Reference* for information about SQL conditions

Restrictions on WHEN (*condition*)

- If you specify this clause, then you must also specify `FOR EACH ROW`.
- The *`condition`* cannot include a subquery or a PL/SQL expression (for example, an invocation of a user-defined function).

trigger_body

The PL/SQL block or `CALL` subprogram that the database runs to fire the trigger. A `CALL` subprogram is either a PL/SQL subprogram or a Java subprogram in a PL/SQL wrapper.

If *trigger_body* is a PL/SQL block and it contains errors, then the `CREATE [OR REPLACE]` statement fails.

Restriction on *trigger_body*

The *declare_section* cannot declare variables of the data type `LONG` or `LONG RAW`.

instead_of_dml_trigger

Creates an `INSTEAD OF` DML trigger (described in "INSTEAD OF DML Triggers").

Restriction on INSTEAD OF

An `INSTEAD OF` trigger can read the `:OLD` and `:NEW` values, but cannot change them.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Note

- If the view is inherently updatable and has `INSTEAD OF` triggers, the triggers take precedence: The database fires the triggers instead of performing DML on the view.
- If the view belongs to a hierarchy, then the subviews do not inherit the trigger.
- The `WITH CHECK OPTION` for views is not enforced when inserts or updates to the view are done using `INSTEAD OF` triggers. The `INSTEAD OF` trigger body must enforce the check. For information about `WITH CHECK OPTION`, see *Oracle Database SQL Language Reference*.
- The database fine-grained access control lets you define row-level security policies on views. These policies enforce specified rules in response to DML operations. If an `INSTEAD OF` trigger is also defined on the view, then the database does not enforce the row-level security policies, because the database fires the `INSTEAD OF` trigger instead of running the DML on the view.

DELETE

If the trigger is created on a noneditioning view, then `DELETE` causes the database to fire the trigger whenever a `DELETE` statement removes a row from the table on which the noneditioning view is defined.

If the trigger is created on a nested table column of a noneditioning view, then `DELETE` causes the database to fire the trigger whenever a `DELETE` statement removes an element from the nested table.

INSERT

If the trigger is created on a noneditioning view, then `INSERT` causes the database to fire the trigger whenever an `INSERT` statement adds a row to the table on which the noneditioning view is defined.

If the trigger is created on a nested table column of a noneditioning view, then `INSERT` causes the database to fire the trigger whenever an `INSERT` statement adds an element to the nested table.

UPDATE

If the trigger is created on a noneditioning view, then `UPDATE` causes the database to fire the trigger whenever an `UPDATE` statement changes a value in a column of the table on which the noneditioning view is defined.

If the trigger is created on a nested table column of a noneditioning view, then `UPDATE` causes the database to fire the trigger whenever an `UPDATE` statement changes a value in a column of the nested table.

nested_table_column

Name of the *`nested_table_column`* on which the trigger is to be created. The trigger fires only if the DML operates on the elements of the nested table. Performing DML operations directly on nested table columns does not cause the database to fire triggers defined on the table containing the nested table column. For more information, see "INSTEAD OF DML Triggers".

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **See Also**
>
> `AS subquery` clause of `CREATE VIEW` in *Oracle Database SQL Language Reference* for a list of constructs that prevent inserts, updates, or deletes on a view

schema

Name of the schema containing the noneditioning view. **Default:** your schema.

noneditioning_view

If you specify *`nested_table_column`*, then *`noneditioning_view`* is the name of the noneditioning view that includes *`nested_table_column`*. Otherwise, *`noneditioning_view`* is the name of the noneditioning view on which the trigger is to be created.

FOR EACH ROW

For documentation only, because an `INSTEAD OF` trigger is always a row trigger.

`ENABLE`

(Default) Creates the trigger in an enabled state.

`DISABLE`

Creates the trigger in a disabled state, which lets you ensure that the trigger compiles without errors before you enable it.

> **Note**
>
> `DISABLE` is especially useful if you are creating a crossedition trigger, which affects the online application being redefined if compilation errors occur.

trigger_body

The PL/SQL block or `CALL` subprogram that the database runs to fire the trigger. A `CALL` subprogram is either a PL/SQL subprogram or a Java subprogram in a PL/SQL wrapper.

If *trigger_body* is a PL/SQL block and it contains errors, then the `CREATE [OR REPLACE]` statement fails.

Restriction on *trigger_body*

The *`declare_section`* cannot declare variables of the data type `LONG` or `LONG RAW`.

compound_dml_trigger

Creates a compound DML trigger (described in "Compound DML Triggers").

ENABLE

(Default) Creates the trigger in an enabled state.

DISABLE

Creates the trigger in a disabled state, which lets you ensure that the trigger compiles without errors before you enable it.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> `DISABLE` is especially useful if you are creating a crossedition trigger, which affects the online application being redefined if compilation errors occur.

WHEN (*condition*)

Specifies a SQL condition that the database evaluates for each row that the triggering statement affects. If the value of *condition* is `TRUE` for an affected row, then *tps_body* runs for that row; otherwise, *tps_body* does not run for that row. The triggering statement runs regardless of the value of *condition*.

The *condition* can contain correlation names (see "*referencing_clause* ::="). In *condition*, do not put a colon (:) before the correlation name `NEW`, `OLD`, or `PARENT` (in this context, it is not a placeholder for a bind variable).

> **See Also**
>
> *Oracle Database SQL Language Reference* for information about SQL conditions

Restrictions on WHEN (*condition*)

- If you specify this clause, then you must also specify at least one of these timing points:
  - `BEFORE EACH ROW`
  - `AFTER EACH ROW`
  - `INSTEAD OF EACH ROW`
- The *condition* cannot include a subquery or a PL/SQL expression (for example, an invocation of a user-defined function).

system_trigger

Defines a system trigger (described in "System Triggers").

BEFORE

Causes the database to fire the trigger before running the triggering event.

AFTER

Causes the database to fire the trigger after running the triggering event.

INSTEAD OF

Creates an `INSTEAD OF` trigger.

Restrictions on INSTEAD OF

- The triggering event must be a `CREATE` statement.
- You can create at most one `INSTEAD OF` DDL trigger (*non_dml_trigger*).

  For example, you can create an `INSTEAD OF` trigger on either the database or schema, but not on both the database and schema.

Copyright © 1996, 2025, Oracle and/or its affiliates.

ddl_event

One or more types of DDL SQL statements that can cause the trigger to fire.

You can create triggers for these events on `DATABASE` or `SCHEMA` unless otherwise noted. You can create `BEFORE` and `AFTER` triggers for any of these events, but you can create `INSTEAD OF` triggers only for `CREATE` events. The database fires the trigger in the existing user transaction.

> **Note**
>
> Some objects are created, altered, and dropped using PL/SQL APIs (for example, scheduler jobs are maintained by subprograms in the `DBMS_SCHEDULER` package). Such PL/SQL subprograms do not fire DDL triggers.

The following *ddl_event* values are valid:

- `ALTER`

  Causes the database to fire the trigger whenever an `ALTER` statement modifies a database object in the data dictionary. An `ALTER DATABASE` statement does not fire the trigger.

- `ANALYZE`

  Causes the database to fire the trigger whenever the database collects or deletes statistics or validates the structure of a database object.

  > **See Also**
  >
  > *Oracle Database SQL Language Reference* for information about using the SQL statement `ANALYZE` to collect statistics

- `ASSOCIATE STATISTICS`

  Causes the database to fire the trigger whenever the database associates a statistics type with a database object.

- `AUDIT`

  Causes the database to fire the trigger whenever an `AUDIT` statement is issued.

- `COMMENT`

  Causes the database to fire the trigger whenever a comment on a database object is added to the data dictionary.

- `CREATE`

  Causes the database to fire the trigger whenever a `CREATE` statement adds a database object to the data dictionary. The `CREATE DATABASE` or `CREATE CONTROLFILE` statement does not fire the trigger.

- `DISASSOCIATE STATISTICS`

  Causes the database to fire the trigger whenever the database disassociates a statistics type from a database object.

- `DROP`

Copyright © 1996, 2025, Oracle and/or its affiliates.

Causes the database to fire the trigger whenever a DROP statement removes a database object from the data dictionary.

- GRANT

  Causes the database to fire the trigger whenever a user grants system privileges or roles or object privileges to another user or to a role.

- NOAUDIT

  Causes the database to fire the trigger whenever a NOAUDIT statement is issued.

- RENAME

  Causes the database to fire the trigger whenever a RENAME statement changes the name of a database object.

- REVOKE

  Causes the database to fire the trigger whenever a REVOKE statement removes system privileges or roles or object privileges from a user or role.

- TRUNCATE

  Causes the database to fire the trigger whenever a TRUNCATE statement removes the rows from a table or cluster and resets its storage characteristics.

- DDL

  Causes the database to fire the trigger whenever any of the preceding DDL statements is issued.

database_event

One of the following database events. You can create triggers for these events on either DATABASE or SCHEMA unless otherwise noted. For each of these triggering events, the database opens an autonomous transaction scope, fires the trigger, and commits any separate transaction (regardless of any existing user transaction).

- AFTER STARTUP

  Causes the database to fire the trigger whenever the database is opened. This event is valid only with DATABASE, not with SCHEMA.

- BEFORE SHUTDOWN

  Causes the database to fire the trigger whenever an instance of the database is shut down. This event is valid only with DATABASE, not with SCHEMA.

- AFTER DB_ROLE_CHANGE

  In an Oracle Data Guard configuration, causes the database to fire the trigger whenever a role change occurs from standby to primary or from primary to standby. This event is valid only with DATABASE, not with SCHEMA.

  > **Note**
  >
  > You cannot create an AFTER DB_ROLE_CHANGE trigger on a PDB.

- AFTER SERVERERROR

  Causes the database to fire the trigger whenever both of these conditions are true:

  – A server error message is logged.

Copyright © 1996, 2025, Oracle and/or its affiliates.

  - Oracle relational database management system (RDBMS) determines that it is safe to fire error triggers.

    Examples of when it is unsafe to fire error triggers include:

    * RDBMS is starting up.
    * A critical error has occurred.

- `AFTER LOGON`

  Causes the database to fire the trigger whenever a client application logs onto the database.

- `BEFORE LOGOFF`

  Causes the database to fire the trigger whenever a client application logs off the database.

- `AFTER SUSPEND`

  Causes the database to fire the trigger whenever a server error causes a transaction to be suspended.

- `AFTER CLONE`

  Can be specified only if `PLUGGABLE DATABASE` is specified. After the PDB is copied (cloned), the database fires the trigger in the new PDB and then deletes the trigger. If the trigger fails, then the copy operation fails.

- `BEFORE UNPLUG`

  Can be specified only if `PLUGGABLE DATABASE` is specified. Before the PDB is unplugged, the database fires the trigger and then deletes it. If the trigger fails, then the unplug operation fails.

- `[ BEFORE | AFTER ] SET CONTAINER`

  Causes the database to fire the trigger either before or after an `ALTER SESSION SET CONTAINER` statement runs.

> **See Also**
>
> "Triggers for Publishing Events" for more information about responding to database events through triggers

[*schema*.]SCHEMA

Defines the trigger on the specified schema. **Default:** current schema. The trigger fires whenever any user connected as the specified schema initiates the triggering event.

[PLUGGABLE] DATABASE

`DATABASE` defines the trigger on the root. In a multitenant container database (CDB), only a common user who is connected to the root can create a trigger on the entire database.

`PLUGGABLE DATABASE` defines the trigger on the PDB to which you are connected.

The trigger fires whenever any user of the specified database or PDB initiates the triggering event.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If you are connected to a PDB, then specifying `DATABASE` is equivalent to specifying `PLUGGABLE DATABASE` unless you want to specify an option that applies only to a PDB (such as `CLONE` or `UNPLUG`).

ENABLE

(Default) Creates the trigger in an enabled state.

DISABLE

Creates the trigger in a disabled state, which lets you ensure that the trigger compiles without errors before you enable it.

WHEN (*condition*)

Specifies a SQL condition that the database evaluates. If the value of *`condition`* is `TRUE`, then *`trigger_body`* runs for that row; otherwise, *`trigger_body`* does not run for that row. The triggering statement runs regardless of the value of *`condition`*.

> **See Also**
>
> *Oracle Database SQL Language Reference* for information about SQL conditions

Restrictions on WHEN (*condition*)

- You cannot specify this clause for a `STARTUP`, `SHUTDOWN`, or `DB_ROLE_CHANGE` trigger.
- If you specify this clause for a `SERVERERROR` trigger, then *`condition`* must be `ERRNO =` *`error_code`*.
- The *`condition`* cannot include a subquery, a PL/SQL expression (for example, an invocation of a user-defined function), or a correlation name.

trigger_body

The PL/SQL block or `CALL` subprogram that the database runs to fire the trigger. A `CALL` subprogram is either a PL/SQL subprogram or a Java subprogram in a PL/SQL wrapper.

If *`trigger_body`* is a PL/SQL block and it contains errors, then the `CREATE [OR REPLACE]` statement fails.

Restrictions on *trigger_body*

- The *`declare_section`* cannot declare variables of the data type `LONG` or `LONG RAW`.
- The trigger body cannot specify either `:NEW` or `:OLD`.

dml_event_clause

Specifies the triggering statements for *simple_dml_trigger* or *compound_dml_trigger*. The database fires the trigger in the existing user transaction.

DELETE

Copyright © 1996, 2025, Oracle and/or its affiliates.

Causes the database to fire the trigger whenever a `DELETE` statement removes a row from *`table`* or the table on which *`view`* is defined.

INSERT

Causes the database to fire the trigger whenever an `INSERT` statement adds a row to *`table`* or the table on which *`view`* is defined.

UPDATE [OF *column* [, *column*]]

Causes the database to fire the trigger whenever an `UPDATE` statement changes a value in a specified column. **Default:** The database fires the trigger whenever an `UPDATE` statement changes a value in any column of *`table`* or the table on which *`view`* is defined.

If you specify a *`column`*, then you cannot change its value in the body of the trigger.

schema

Name of the schema that contains the database object on which the trigger is to be created. **Default:** your schema.

table

Name of the database table or object table on which the trigger is to be created.

Restriction on *schema.table*

You cannot create a trigger on a table in the schema `SYS`.

view

Name of the database view or object view on which the trigger is to be created.

> **Note**
>
> A compound DML trigger created on a noneditioning view is not really compound, because it has only one timing point section.

referencing_clause

Specifies correlation names, which refer to old, new, and parent values of the current row. **Defaults:** `OLD`, `NEW`, and `PARENT`.

If your trigger is associated with a table named `OLD`, `NEW`, or `PARENT`, then use this clause to specify different correlation names to avoid confusion between the table names and the correlation names.

If the trigger is defined on a nested table, then `OLD` and `NEW` refer to the current row of the nested table, and `PARENT` refers to the current row of the parent table. If the trigger is defined on a database table or view, then `OLD` and `NEW` refer to the current row of the database table or view, and `PARENT` is undefined.

Restriction on *referencing_clause*

The *referencing_clause* is not valid if *trigger_body* is `CALL` *routine*.

DML row-level triggers cannot reference fields of OLD/NEW/PARENT pseudorecords (correlation names) that correspond to columns with declared collation other than `USING_NLS_COMP`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

trigger_edition_clause

Creates the trigger as a crossedition trigger.

The handling of DML changes during edition-based redefinition (EBR) of an online application can entail multiple steps. Therefore, it is likely, though not required, that a crossedition trigger is also a **compound trigger**.

Restrictions on *trigger_edition_clause*

- You cannot define a crossedition trigger on a view.
- You cannot specify `NONEDITIONABLE` for a crossedition trigger.

FORWARD

(Default) Creates the trigger as a forward crossedition trigger. A forward crossedition trigger is intended to fire when DML changes are made in a database while an online application that uses the database is being patched or upgraded with EBR. The body of a crossedition trigger is designed to handle these DML changes so that they can be appropriately applied after the changes to the application code are completed.

REVERSE

Creates the trigger as a reverse crossedition trigger, which is intended to fire when the application, after being patched or upgraded with EBR, makes DML changes. This trigger propagates data to columns or tables used by the application before it was patched or upgraded.

> **See Also**
>
> *Oracle Database Development Guide* for more information crossedition triggers

trigger_ordering_clause

FOLLOWS | PRECEDES

Specifies the relative firing of triggers that have the same timing point. It is especially useful when creating crossedition triggers, which must fire in a specific order to achieve their purpose.

Use `FOLLOWS` to indicate that the trigger being created must fire after the specified triggers. You can specify `FOLLOWS` for a conventional trigger or for a forward crossedition trigger.

Use `PRECEDES` to indicate that the trigger being created must fire before the specified triggers. You can specify `PRECEDES` only for a reverse crossedition trigger.

The specified triggers must exist, and they must have been successfully compiled. They need not be enabled.

If you are creating a noncrossedition trigger, then the specified triggers must be all of the following:

- Noncrossedition triggers
- Defined on the same table as the trigger being created
- Visible in the same edition as the trigger being created

If you are creating a crossedition trigger, then the specified triggers must be all of the following:

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Crossedition triggers
- Defined on the same table or editioning view as the trigger being created, unless you specify `FOLLOWS` or `PRECEDES`.

  If you specify `FOLLOWS`, then the specified triggers must be forward crossedition triggers, and if you specify `PRECEDES`, then the specified triggers must be reverse crossedition triggers. However, the specified triggers need not be on the same table or editioning view as the trigger being created.
- Visible in the same edition as the trigger being created

In the following definitions, A, B, C, and D are either noncrossedition triggers or forward crossedition triggers:

- If B specifies A in its `FOLLOWS` clause, then B **directly follows** A.
- If C directly follows B, and B directly follows A, then C **indirectly follows** A.
- If D directly follows C, and C indirectly follows A, then D indirectly follows A.
- If B directly or indirectly follows A, then B **explicitly follows** A (that is, the firing order of B and A is explicitly specified by one or more `FOLLOWS` clauses).

In the following definitions, A, B, C, and D are reverse crossedition triggers:

- If A specifies B in its `PRECEDES` clause, then A **directly precedes** B.
- If A directly precedes B, and B directly precedes C, then A **indirectly precedes** C.
- If A directly precedes B, and B indirectly precedes D, then A indirectly precedes D.
- If A directly or indirectly precedes B, then A **explicitly precedes** B (that is, the firing order of A and B is explicitly specified by one or more `PRECEDES` clauses).

Belongs to *compound_dml_trigger*.

compound_trigger_block

If the trigger is created on a noneditioning view, then *compound_trigger_block* must have only the `INSTEAD OF EACH ROW` section.

If the trigger is created on a table or editioning view, then timing point sections can be in any order, but no section can be repeated. The *compound_trigger_block* cannot have an `INSTEAD OF EACH ROW` section.

> **See Also**
>
> "Compound DML Trigger Structure"

Restriction on *compound_trigger_block*

The *declare_section* of *compound_trigger_block* cannot include `PRAGMA AUTONOMOUS_TRANSACTION`.

> **See Also**
>
> "Compound DML Trigger Restrictions"

Copyright © 1996, 2025, Oracle and/or its affiliates.

timing_point

BEFORE STATEMENT

Specifies the `BEFORE STATEMENT` section of a *compound_dml_trigger* on a table or editioning view. This section causes the database to fire the trigger before running the triggering event.

Restriction on BEFORE STATEMENT

This section cannot specify `:NEW` or `:OLD`.

BEFORE EACH ROW

Specifies the `BEFORE EACH ROW` section of a *compound_dml_trigger* on a table or editioning view. This section causes the database to fire the trigger before running the triggering event. The trigger fires before each affected row is changed.

This section can read and write the `:OLD` and `:NEW` fields.

AFTER STATEMENT

Specifies the `AFTER STATEMENT` section of *compound_dml_trigger* on a table or editioning view. This section causes the database to fire the trigger after running the triggering event.

Restriction on AFTER STATEMENT

This section cannot specify `:NEW` or `:OLD`.

AFTER EACH ROW

Specifies the `AFTER EACH ROW` section of a *compound_dml_trigger* on a table or editioning view. This section causes the database to fire the trigger after running the triggering event. The trigger fires after each affected row is changed.

This section can read but not write the `:OLD` and `:NEW` fields.

INSTEAD OF EACH ROW

Specifies the `INSTEAD OF EACH ROW` section (the only timing point section) of a *compound_dml_trigger* on a noneditioning view. The database runs *tps_body* instead of running the triggering DML statement. For more information, see "INSTEAD OF DML Triggers".

Restriction on INSTEAD OF EACH ROW

- This section can appear only in a *compound_dml_trigger* on a noneditioning view.
- This section can read but not write the `:OLD` and `:NEW` values.

tps_body

The PL/SQL block or `CALL` subprogram that the database runs to fire the trigger. A `CALL` subprogram is either a PL/SQL subprogram or a Java subprogram in a PL/SQL wrapper.

If *tps_body* is a PL/SQL block and it contains errors, then the `CREATE [OR REPLACE]` statement fails.

Restriction on *tps_body*

The *declare_section* cannot declare variables of the data type `LONG` or `LONG RAW`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Examples

DML Triggers

- Example 10-1, "Trigger Uses Conditional Predicates to Detect Triggering Statement"
- Example 10-2, "INSTEAD OF Trigger"
- Example 10-3, "INSTEAD OF Trigger on Nested Table Column of View"
- Example 10-4, "Compound Trigger Logs Changes to One Table in Another Table"
- Example 10-5, "Compound Trigger Avoids Mutating-Table Error"

Triggers for Ensuring Referencial Integrity

- Example 10-6, "Foreign Key Trigger for Child Table"
- Example 10-7, "UPDATE and DELETE RESTRICT Trigger for Parent Table"
- Example 10-8, "UPDATE and DELETE SET NULL Trigger for Parent Table"
- Example 10-9, "DELETE CASCADE Trigger for Parent Table"
- Example 10-10, "UPDATE CASCADE Trigger for Parent Table"
- Example 10-11, "Trigger Checks Complex Constraints"
- Example 10-12, "Trigger Enforces Security Authorizations"
- Example 10-13, "Trigger Derives New Column Values"

Triggers That Use Correlation Names and Pseudorecords

- Example 10-14, "Trigger Logs Changes to EMPLOYEES.SALARY"
- Example 10-15, "Conditional Trigger Prints Salary Change Information"
- Example 10-16, "Trigger Modifies CLOB Columns"
- Example 10-17, "Trigger with REFERENCING Clause"
- Example 10-18, "Trigger References OBJECT_VALUE Pseudocolumn"

System Triggers

- Example 10-19, "BEFORE Statement Trigger on Sample Schema HR"
- Example 10-20, "AFTER Statement Trigger on Database"
- Example 10-21, "Trigger Monitors Logons"
- Example 10-22, "INSTEAD OF CREATE Trigger on Schema"

Miscellaneous Trigger Examples

- Example 10-23, "Trigger Invokes Java Subprogram"
- Example 10-24, "Trigger Cannot Handle Exception if Remote Database is Unavailable"
- Example 10-25, "Workaround for Trigger Cannot Handle Exception if Remote Database is Unavailable"
- Example 10-26, "Trigger Causes Mutating-Table Error"
- Example 10-27, "Update Cascade"
- Example 10-28, "Viewing Information About Triggers"

Copyright © 1996, 2025, Oracle and/or its affiliates.

Related Topics

In this chapter:

- "ALTER TRIGGER Statement"
- "DROP TRIGGER Statement"

In other chapters:

- PL/SQL Triggers

> **See Also**
>
> *Oracle Database Development Guide* for more information about crossedition triggers

CREATE TYPE Statement

The `CREATE TYPE` statement specifies the name of the type and its attributes, methods, and other properties.

The `CREATE TYPE` statement creates or replaces the specification of one of these:

- Abstract Data Type (ADT)
- Standalone varying array (varray) type
- Standalone nested table type
- Incomplete object type

  An **incomplete type** is a type created by a forward type definition. It is called incomplete because it has a name but no attributes or methods. It can be referenced by other types, allowing you to define types that refer to each other. However, you must fully specify the type before you can use it to create a table or an object column or a column of a nested table type.

The `CREATE TYPE BODY` statement contains the code for the methods that implement the type.

> **Note**
>
> - If you create a type whose specification declares only attributes but no methods, then you need not specify a type body.
> - A standalone collection type that you create with the `CREATE TYPE` statement differs from a collection type that you define with the keyword `TYPE` in a PL/SQL block or package. For information about the latter, see "Collection Variable Declaration".
> - With the `CREATE TYPE` statement, you can create nested table and `VARRAY` types, but not associative arrays. In a PL/SQL block or package, you can define all three collection types.

Topics

- Prerequisites
- Syntax

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Semantics
- Examples
- Related Topics

Prerequisites

To create a type in your schema, you must have the `CREATE TYPE` system privilege. To create a type in another user's schema, you must have the `CREATE ANY TYPE` system privilege. You can acquire these privileges explicitly or be granted them through a role.

To create a subtype, you must have the `UNDER ANY TYPE` system privilege or the `UNDER` object privilege on the supertype.

The owner of the type must be explicitly granted the `EXECUTE` object privilege to access all other types referenced in the definition of the type, or the type owner must be granted the `EXECUTE ANY TYPE` system privilege. The owner cannot obtain these privileges through roles.

If the type owner intends to grant other users access to the type, then the owner must be granted the `EXECUTE` object privilege on the referenced types with the `GRANT OPTION` or the `EXECUTE ANY TYPE` system privilege with the `ADMIN OPTION`. Otherwise, the type owner has insufficient privileges to grant access on the type to other users.

Syntax

***create_type* ::=**

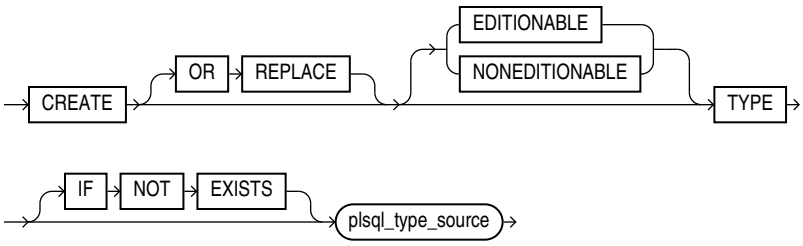

***plsql_type_source* ::=**

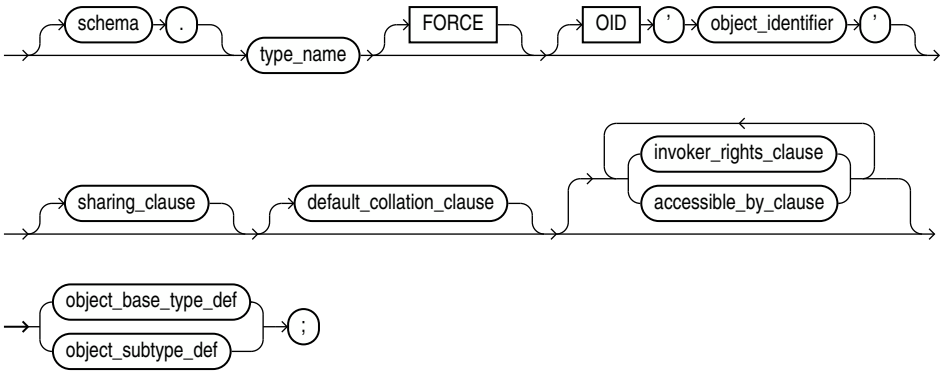

(*sharing_clause* ::=, *default_collation_clause* ::= , *accessible_by_clause* ::= , *invoker_rights_clause* ::= , *object_base_type_def* ::= , *object_subtype_def* ::=)

Copyright © 1996, 2025, Oracle and/or its affiliates.

***object_base_type_def* ::=**



(*object_type_def* ::=, *nested_table_type_spec* ::=, *varray_type_spec* ::=)

***object_subtype_def* ::=**



(*datatype* ::=, *element_spec* ::=)

***object_type_def* ::=**

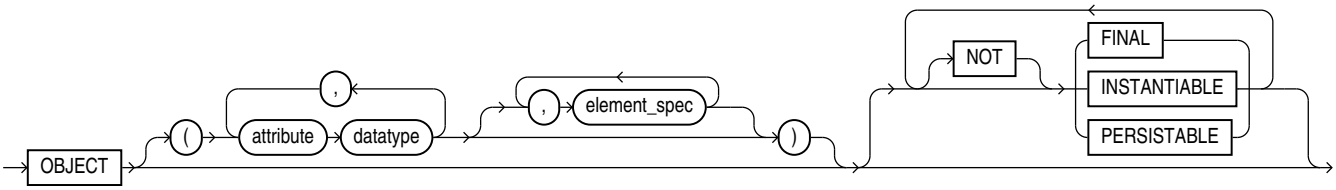

(*datatype* ::=, *element_spec* ::=)

***varray_type_spec* ::=**

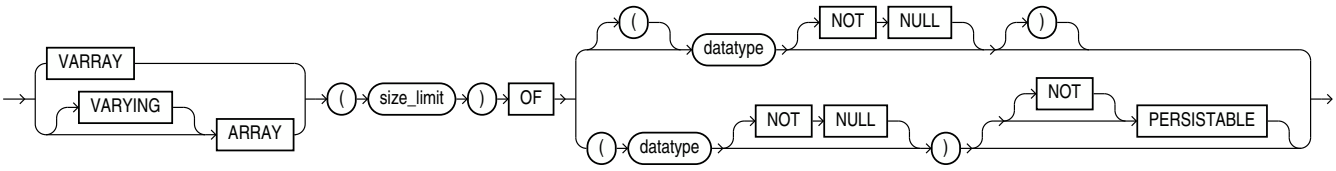

(*datatype* ::=)

***nested_table_type_spec* ::=**

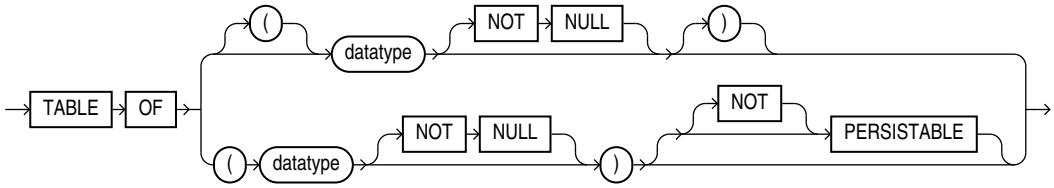

Copyright © 1996, 2025, Oracle and/or its affiliates.

(*datatype ::=*)

Semantics

create_type

OR REPLACE

Re-creates the type if it exists, and recompiles it.

Users who were granted privileges on the type before it was redefined can still access the type without being regranted the privileges.

If any function-based indexes depend on the type, then the database marks the indexes `DISABLED`.

[EDITIONABLE | NONEDITIONABLE]

Specifies whether the type is an editioned or noneditioned object if editioning is enabled for the schema object type `TYPE` in *`schema`*. **Default:** `EDITIONABLE`. For information about editioned and noneditioned objects, see *Oracle Database Development Guide*.

IF NOT EXISTS

Creates the type if it does not already exist. If a type by the same name does exist, the statement is ignored without error and the original type remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

plsql_type_source

schema

Name of the schema containing the type. **Default:** your schema.

type_name

Name of an ADT, a nested table type, or a `VARRAY` type.

If creating the type results in compilation errors, then the database returns an error. You can see the associated compiler error messages with the SQL*Plus command `SHOW ERRORS`.

The database implicitly defines a constructor method for each user-defined type that you create. A **constructor** is a system-supplied procedure that is used in SQL statements or in PL/SQL code to construct an instance of the type value. The name of the constructor method is the name of the user-defined type. You can also create a user-defined constructor using the *`constructor_spec`* syntax.

The parameters of the ADT constructor method are the data attributes of the ADT. They occur in the same order as the attribute definition order for the ADT. The parameters of a nested table or varray constructor are the elements of the nested table or the varray.

FORCE

If *`type_name`* exists and has type dependents, but not table dependents, `FORCE` forces the statement to replace the type. (If *`type_name`* has table dependents, the statement fails with or without `FORCE`.)

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> If type `t1` has type dependent `t2`, and type `t2` has table dependents, then type `t1` also has table dependents.

> **See Also**
>
> *Oracle Database Object-Relational Developer's Guide*

OID '*object_identifier*'

Establishes type equivalence of identical objects in multiple databases. See *Oracle Database Object-Relational Developer's Guide* for information about this clause.

object_base_type_def

Creates a schema-level ADT. Such ADTs are sometimes called **root** ADTs.

IS | AS

The keyword `IS` or `AS` is required when creating an ADT.

> **See Also**
>
> "Example 15-25, ADT Examples"

object_subtype_def

Creates a subtype of an existing type.

UNDER *supertype*

The existing supertype must be an ADT. The subtype you create in this statement inherits the properties of its supertype. It must either override some of those properties or add properties to distinguish it from the supertype.

> **See Also**
>
> "Example 15-26, Creating a Subtype" and "Example 15-27, Creating a Type Hierarchy"

attribute

Name of an ADT attribute. An ADT attribute is a data item with a name and a type specifier that forms the structure of the ADT. You must specify at least one attribute for each ADT. The name must be unique in the ADT, but can be used in other ADTs.

If you are creating a subtype, then the attribute name cannot be the same as any attribute or method name declared in the supertype chain.

Copyright © 1996, 2025, Oracle and/or its affiliates.

datatype

The data type of an ADT attribute. This data type must be stored in the database; that is, either a predefined data type or a user-defined standalone collection type.

Restrictions on *datatype*

- You cannot impose the `NOT NULL` constraint on an attribute.
- You cannot specify attributes of type `ROWID`, `LONG`, or `LONG RAW`.
- You cannot specify a data type of `UROWID` for an ADT.
- If you specify an object of type `REF`, then the target object must have an object identifier.
- If you are creating a collection type for use as a nested table or varray column of a table, then you cannot specify attributes of type `ANYTYPE`, `ANYDATA`, or `ANYDATASET`.
- JSON cannot be an attribute of a user defined type (ADT).

object_type_def

Creates an ADT. The variables that form the data structure are called **attributes**. The member subprograms that define the behavior of the ADT are called **methods**.

OBJECT

The keyword `OBJECT` is required.

[NOT] FINAL, [NOT] INSTANTIABLE , [NOT] PERSISTABLE

At the schema level of the syntax, these clauses specify the inheritance attributes of the type.

[NOT] FINAL

Use the [`NOT`] `FINAL` clause to indicate whether any further subtypes can be created for this type:

- **(Default)** Specify `FINAL` if no further subtypes can be created for this type.
- Specify `NOT FINAL` if further subtypes can be created under this type.

[NOT] INSTANTIABLE

Use the [`NOT`] `INSTANTIABLE` clause to indicate whether any object instances of this type can be constructed:

- **(Default)** Specify `INSTANTIABLE` if object instances of this type can be constructed.
- Specify `NOT INSTANTIABLE` if no default or user-defined constructor exists for this ADT. You must specify these keywords for any type with noninstantiable methods and for any type that has no attributes, either inherited or specified in this statement.

[NOT] PERSISTABLE

Use [`NOT`] `PERSISTABLE` clause to indicate whether or not instances of the object type are persistable.

Only `PERSISTABLE` types can be stored in a table.

- **(Default)** You can specify `PERSISTABLE` if all the object type attributes are persistable. Creating a persistable object type with non-persistable attributes is not allowed.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- You can specify NOT PERSISTABLE if the object type attributes are persistable or non-persistable.
- Specify NOT PERSISTABLE if the ADT has a unique PL/SQL predefined type, such as SIMPLE_INTEGER and PLS_INTEGER.

Restrictions on [NOT] PERSISTABLE ADT

You cannot specify the [NOT] PERSISTABLE clause in a subtype definition. The persistance property of a subtype is inherited from its supertype.

Non-persistable ADTs with PL/SQL unique attributes are only allowed in the PL/SQL context.

See : Example 15-30, "Creating a Non-Persistable Object Type"

varray_type_spec

Creates the type as an ordered set of elements, each of which has the same data type.

Restrictions on *varray_type_spec*

You can create a VARRAY type of XMLType or of a LOB type for procedural purposes, for example, in PL/SQL or in view queries. However, database storage of such a varray is not supported, so you cannot create an object table or an column of such a VARRAY type.

> **See Also**
>
> "Example 15-28, Creating a Varray Type"

[NOT] PERSISTABLE

(datatype [NOT NULL])

The parentheses before and after the datatype [NOT NULL] clause are required when PERSISTABLE is specified. The parentheses are optional if PERSISTABLE is not specified.

Use [NOT] PERSISTABLE clause to indicate whether or not instances of the collection type (VARRAY or nested table) are persistable.

- **(Default)** A collection can be PERSISTABLE only if the collection element type is persistable. Creating a persistable collection type with non-persistable element type is not allowed.
- Specify NOT PERSISTABLE if any element type of the collection is not persistable. You can specify NOT PERSISTABLE for any collection, whether the element type is persistable or not.
- Specify NOT PERSISTABLE if the collection has a unique PL/SQL predefined type, such as SIMPLE_INTEGER and PLS_INTEGER.

Restrictions on [NOT] PERSISTABLE Varray and Nested Array

Non-persistable types with PL/SQL unique attributes are only allowed in the PL/SQL context.

See Example 15-29, "Creating a Non-Persistable Nested Array" and Example 15-31, "Creating a Non-Persistable Varray"

nested_table_type_spec

Creates a named nested table of type *datatype*.

[NOT] PERSISTABLE

Copyright © 1996, 2025, Oracle and/or its affiliates.

Same as for VARRAY, see " [NOT] PERSISTABLE"

See Also

- "Example 15-32, Creating a Nested Table Type"
- "Example 15-33, Creating a Nested Table Type Containing a VARRAY"

Examples

Example 15-25 ADT Examples

This example shows how the sample type customer_typ was created for the sample Order Entry (oe) schema. A hypothetical name is given to the table so that you can duplicate this example in your test database:

```
CREATE TYPE customer_typ_demo AS OBJECT
    ( customer_id        NUMBER(6)
    , cust_first_name    VARCHAR2(20)
    , cust_last_name     VARCHAR2(20)
    , cust_address       CUST_ADDRESS_TYP
    , phone_numbers      PHONE_LIST_TYP
    , nls_language       VARCHAR2(3)
    , nls_territory      VARCHAR2(30)
    , credit_limit       NUMBER(9,2)
    , cust_email         VARCHAR2(30)
    , cust_orders        ORDER_LIST_TYP
    ) ;
/
```

In this example, the data_typ1 ADT is created with one member function prod, which is implemented in the CREATE TYPE BODY statement:

```
CREATE TYPE data_typ1 AS OBJECT
   ( year NUMBER,
     MEMBER FUNCTION prod(invent NUMBER) RETURN NUMBER
   );
/

CREATE TYPE BODY data_typ1 IS
      MEMBER FUNCTION prod (invent NUMBER) RETURN NUMBER IS
         BEGIN
             RETURN (year + invent);
         END;
      END;
/
```

Example 15-26 Creating a Subtype

This statement shows how the subtype corporate_customer_typ in the sample oe schema was created.

Copyright © 1996, 2025, Oracle and/or its affiliates.

It is based on the `customer_typ` supertype created in the preceding example and adds the `account_mgr_id` attribute. A hypothetical name is given to the table so that you can duplicate this example in your test database:

```
CREATE TYPE corporate_customer_typ_demo UNDER customer_typ
    ( account_mgr_id     NUMBER(6)
    );
/
```

Example 15-27 Creating a Type Hierarchy

These statements create a type hierarchy.

Type `employee_t` inherits the `name` and `ssn` attributes from type `person_t` and in addition has `department_id` and `salary` attributes. Type `part_time_emp_t` inherits all of the attributes from `employee_t` and, through `employee_t`, those of `person_t` and in addition has a `num_hrs` attribute. Type `part_time_emp_t` is final by default, so no further subtypes can be created under it.

```
CREATE TYPE person_t AS OBJECT (name VARCHAR2(100), ssn NUMBER)
   NOT FINAL;
/

CREATE TYPE employee_t UNDER person_t
   (department_id NUMBER, salary NUMBER) NOT FINAL;
/

CREATE TYPE part_time_emp_t UNDER employee_t (num_hrs NUMBER);
/
```

You can use type hierarchies to create substitutable tables and tables with substitutable columns.

Example 15-28 Creating a Varray Type

This statement shows how the `phone_list_typ` `VARRAY` type with five elements in the sample `oe` schema was created.

A hypothetical name is given to the table so that you can duplicate this example in your test database:

```
CREATE TYPE phone_list_typ_demo AS VARRAY(5) OF VARCHAR2(25);
/
```

Example 15-29 Creating a Non-Persistable Nested Array

This example shows how to create a PL/SQL nested array with unique PL/SQL predefined type `PLS_INTEGER` that is not persistable and can only be used in your PL/SQL programs.

```
CREATE TYPE IF NOT EXISTS varr_int AS VARRAY(10) OF (PLS_INTEGER) NOT
PERSISTABLE;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

The optional `IF NOT EXISTS` clause is used to ensure that the statement is idempotent. The resulting output message (in this case `Type created`) is the same whether the type is created or the statement is ignored.

Example 15-30 Creating a Non-Persistable Object Type

This example shows how to create a PL/SQL object type with unique PL/SQL predefined type `PLS_INTEGER` that is not persistable and can only be used in your PL/SQL programs.

```
CREATE TYPE plsint AS OBJECT (I PLS_INTEGER) NOT PERSISTABLE;
/
```

Example 15-31 Creating a Non-Persistable Varray

This example shows how to create a PL/SQL varray with unique PL/SQL predefined type `PLS_INTEGER` that is not persistable and can only be used in your PL/SQL programs.

```
CREATE TYPE tab_plsint AS TABLE OF (PLS_INTEGER) NOT PERSISTABLE;
/
```

Example 15-32 Creating a Nested Table Type

This example from the sample schema `pm` creates the table type `textdoc_tab` of type `textdoc_typ`:

```
CREATE TYPE textdoc_typ AS OBJECT
    ( document_typ      VARCHAR2(32)
    , formatted_doc     BLOB
    ) ;
/

CREATE TYPE textdoc_tab AS TABLE OF textdoc_typ;
/
```

Example 15-33 Creating a Nested Table Type Containing a Varray

This example of multilevel collections is a variation of the sample table `oe.customers`.

In this example, the `cust_address` object column becomes a nested table column with the `phone_list_typ` varray column embedded in it. The phone_list_typ_demo type was created in "Example 15-28".

```
CREATE TYPE cust_address_typ2 AS OBJECT
       ( street_address     VARCHAR2(40)
       , postal_code        VARCHAR2(10)
       , city               VARCHAR2(30)
       , state_province     VARCHAR2(10)
       , country_id         CHAR(2)
       , phone              phone_list_typ_demo
       );
/

CREATE TYPE cust_nt_address_typ
   AS TABLE OF cust_address_typ2;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example 15-34 Constructor Example

This example invokes the system-defined constructor to construct the `demo_typ` object and insert it into the `demo_tab` table.

```
CREATE TYPE demo_typ1 AS OBJECT (a1 NUMBER, a2 NUMBER);
/

CREATE TABLE demo_tab1 (b1 NUMBER, b2 demo_typ1);
/

INSERT INTO demo_tab1 VALUES (1, demo_typ1(2,3));
/
```

Example 15-35 Creating a Member Method

This example invokes method constructor `col.get_square`.

First the type is created:

```
CREATE TYPE demo_typ2 AS OBJECT (a1 NUMBER,
   MEMBER FUNCTION get_square RETURN NUMBER);
/
```

Next a table is created with an ADT column and some data is inserted into the table:

```
CREATE TABLE demo_tab2(col demo_typ2);
/

INSERT INTO demo_tab2 VALUES (demo_typ2(2));
/
```

The type body is created to define the member function, and the member method is invoked:

```
CREATE TYPE BODY demo_typ2 IS
   MEMBER FUNCTION get_square
   RETURN NUMBER
   IS x NUMBER;
   BEGIN
      SELECT c.col.a1*c.col.a1 INTO x
      FROM demo_tab2 c;
      RETURN (x);
   END;
END;
/

SELECT t.col.get_square() FROM demo_tab2 t;
/
```

Result:

```
T.COL.GET_SQUARE()
------------------
                 4
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Unlike function invocations, method invocations require parentheses, even when the methods do not have additional arguments.

Example 15-36 Creating a Static Method

This example changes the definition of the `employee_t` type to associate it with the `construct_emp` function.

The example first creates an ADT `department_t` and then an ADT `employee_t` containing an attribute of type `department_t`:

```
CREATE OR REPLACE TYPE department_t AS OBJECT (
   deptno number(10),
   dname CHAR(30));
/

CREATE OR REPLACE TYPE employee_t AS OBJECT(
   empid RAW(16),
   ename CHAR(31),
   dept REF department_t,
      STATIC function construct_emp
      (name VARCHAR2, dept REF department_t)
      RETURN employee_t
);
/
```

This statement requires this type body statement.

```
CREATE OR REPLACE TYPE BODY employee_t IS
   STATIC FUNCTION construct_emp
   (name varchar2, dept REF department_t)
   RETURN employee_t IS
      BEGIN
         return employee_t(SYS_GUID(),name,dept);
      END;
END;
/
```

Next create an object table and insert into the table:

```
CREATE TABLE emptab OF employee_t;
/
INSERT INTO emptab
   VALUES (employee_t.construct_emp('John Smith', NULL));
/
```

Related Topics

- ALTER TYPE Statement
- CREATE TYPE BODY Statement
- DROP TYPE Statement
- Abstract Data Types
- Conditional Compilation Directive Restrictions

Copyright © 1996, 2025, Oracle and/or its affiliates.

- Collection Variable Declaration
- Collection Types for information about user-defined standalone collection types
- PL/SQL Data Types
- *Oracle Database Object-Relational Developer's Guide* for more information about objects, incomplete types, varrays, and nested tables
- *Oracle Database Object-Relational Developer's Guide* for more information about constructors

CREATE TYPE BODY Statement

The `CREATE TYPE BODY` defines or implements the member methods defined in the type specification that was created with the `CREATE TYPE` statement.

For each method specified in a type specification for which you did not specify the *`call_spec`*, you must specify a corresponding method body in the type body.

Topics

- Prerequisites
- Syntax
- Semantics
- Examples
- Related Topics

Prerequisites

Every member declaration in the `CREATE TYPE` specification for an ADT must have a corresponding construct in the `CREATE TYPE` or `CREATE TYPE BODY` statement.

To create or replace a type body in your schema, you must have the `CREATE TYPE` or the `CREATE ANY TYPE` system privilege. To create a type in another user's schema, you must have the `CREATE ANY TYPE` system privilege. To replace a type in another user's schema, you must have the `DROP ANY TYPE` system privilege.

Syntax

***create_type_body* ::=**

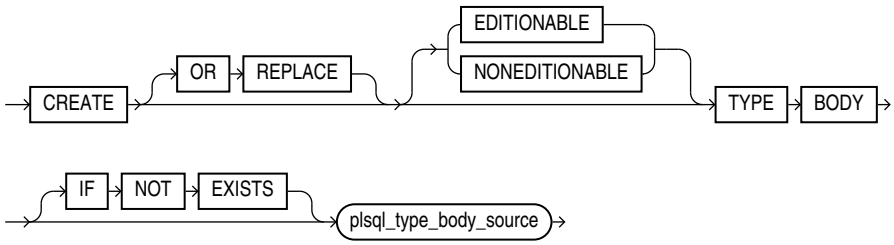

Copyright © 1996, 2025, Oracle and/or its affiliates.

plsql_type_body_source **::=**

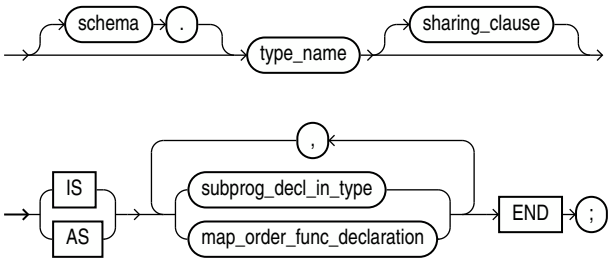

(*sharing_clause* ::=, *map_order_func_declaration* ::=, *subprog_decl_in_type* ::=)

subprog_decl_in_type **::=**



proc_decl_in_type **::=**

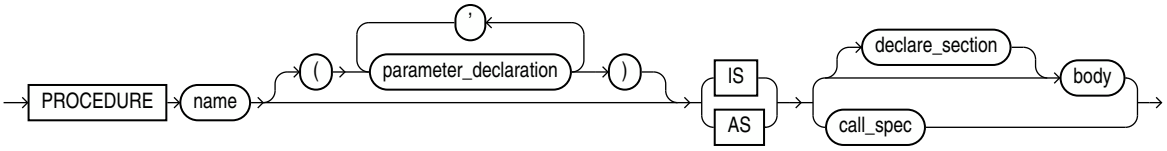

(*body* ::=, *call_spec* ::=, *declare_section* ::=, *parameter_declaration* ::=)

func_decl_in_type **::=**

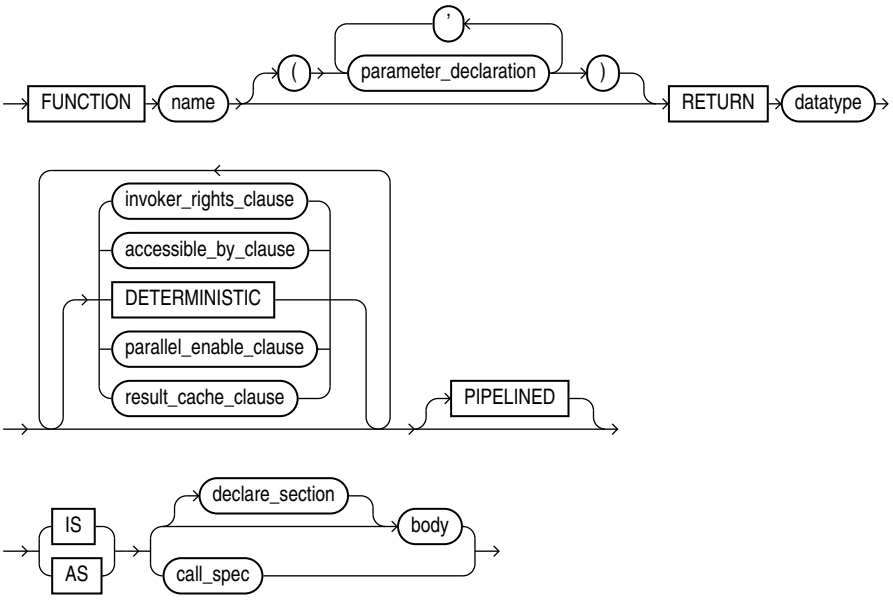

Copyright © 1996, 2025, Oracle and/or its affiliates.

(*body* ::=, *invoker_rights_clause* ::=, *accessible_by_clause* ::=, *deterministic_clause* ::=, *call_spec* ::=, *declare_section* ::=, *parameter_declaration* ::=, *parallel_enable_clause* ::=, *result_cache_clause* ::=, *pipelined_clause* ::=)

***constructor_declaration* ::=**

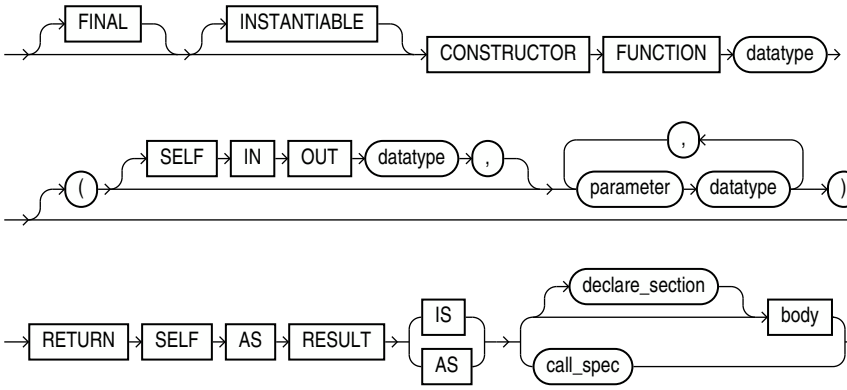

(*call_spec* ::=)

***map_order_func_declaration* ::=**



Semantics

create_type_body

OR REPLACE

Re-creates the type body if it exists, and recompiles it.

Users who were granted privileges on the type body before it was redefined can still access the type body without being regranted the privileges.

You can use this clause to add member subprogram definitions to specifications added with the `ALTER TYPE ... REPLACE` statement.

[EDITIONABLE | NONEDITIONABLE]

If you do not specify this property, then the type body inherits `EDITIONABLE` or `NONEDITIONABLE` from the type specification. If you do specify this property, then it must match that of the type specification.

IF NOT EXISTS

Creates the type body if it does not already exist. If a type body by the same name does exist, the statement is ignored without error and the original type body remains unchanged.

`IF NOT EXISTS` cannot be used in combination with `OR REPLACE`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

plsql_type_body_source

schema

Name of the schema containing the type body. **Default:** your schema.

type_name

Name of an ADT.

subprog_decl_in_type

The type of function or procedure subprogram associated with the type specification.

You must define a corresponding method name and optional parameter list in the type specification for each procedure or function declaration. For functions, you also must specify a return type.

map_order_func_declaration

You can declare either one `MAP` method or one `ORDER` method, regardless of how many `MEMBER` or `STATIC` methods you declare. If you declare either a `MAP` or `ORDER` method, then you can compare object instances in SQL.

If you do not declare either method, then you can compare object instances only for equality or inequality. Instances of the same type definition are equal only if each pair of their corresponding attributes is equal.

MAP MEMBER

Declares or implements a `MAP` member function that returns the relative position of a given instance in the ordering of all instances of the object. A `MAP` method is called implicitly and specifies an ordering of object instances by mapping them to values of a predefined scalar type. PL/SQL uses the ordering to evaluate Boolean expressions and to perform comparisons.

If the argument to the `MAP` method is null, then the `MAP` method returns null and the method is not invoked.

An type body can contain only one `MAP` method, which must be a function. The `MAP` function can have no arguments other than the implicit `SELF` argument.

ORDER MEMBER

Specifies an `ORDER` member function that takes an instance of an object as an explicit argument and the implicit `SELF` argument and returns either a negative integer, zero, or a positive integer, indicating that the implicit `SELF` argument is less than, equal to, or greater than the explicit argument, respectively.

If either argument to the `ORDER` method is null, then the `ORDER` method returns null and the method is not invoked.

When instances of the same ADT definition are compared in an `ORDER BY` clause, the database invokes the `ORDER MEMBER` *`func_decl_in_type`*.

An object specification can contain only one `ORDER` method, which must be a function having the return type `NUMBER`.

proc_decl_in_type

A procedure subprogram declaration.

Copyright © 1996, 2025, Oracle and/or its affiliates.

constructor_declaration

A user-defined constructor subprogram declaration. The `RETURN` clause of a constructor function must be `RETURN SELF AS RESULT`. This setting indicates that the most specific type of the value returned by the constructor function is the most specific type of the `SELF` argument that was passed in to the constructor function.

> **See Also**
>
> - "CREATE TYPE Statement" for a list of restrictions on user-defined functions
> - "Overloaded Subprograms" for information about overloading subprogram names
> - *Oracle Database Object-Relational Developer's Guide* for information about and examples of user-defined constructors

declare_section

Declares items that are local to the procedure or function.

body

Procedure or function statements.

func_decl_in_type

A function subprogram declaration.

Examples

Several examples of creating type bodies appear in the Examples section of "CREATE TYPE Statement". For an example of re-creating a type body, see "Example 15-7".

Related Topics

- "CREATE TYPE Statement"
- "DROP TYPE BODY Statement"
- "CREATE FUNCTION Statement"
- "CREATE PROCEDURE Statement"

DROP FUNCTION Statement

The `DROP FUNCTION` statement drops a standalone function from the database.

> **Note**
>
> Do not use this statement to drop a function that is part of a package. Instead, either drop the entire package using the "DROP PACKAGE Statement" or redefine the package without the function using the "CREATE PACKAGE Statement" with the `OR REPLACE` clause.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The function must be in your schema or you must have the `DROP ANY PROCEDURE` system privilege.

Syntax

***drop_function* ::=**



Semantics

drop_function

IF EXISTS

Drops the function if it exists. If no such function exists, the statement is ignored without error.

schema

Name of the schema containing the function. **Default:** your schema.

function_name

Name of the function to be dropped.

The database invalidates any local objects that depend on, or invoke, the dropped function. If you subsequently reference one of these objects, then the database tries to recompile the object and returns an error if you have not re-created the dropped function.

If any statistics types are associated with the function, then the database disassociates the statistics types with the `FORCE` option and drops any user-defined statistics collected with the statistics type.

> **See Also**
>
> - *Oracle Database SQL Language Reference* for information about the `ASSOCIATE STATISTICS` statement
> - *Oracle Database SQL Language Reference* for information about the `DISASSOCIATE STATISTICS` statement

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example

Example 15-37 Dropping a Function

This statement drops the function `SecondMax` in the sample schema `oe` and invalidates all objects that depend upon `SecondMax`:

```
DROP FUNCTION IF EXISTS oe.SecondMax;
```

If `SecondMax` does not already exist in the schema, this statement is ignored without error. Note that the output message is the same whether or not the function exists (in this case, `Function dropped.`).

> **See Also**
>
> "Example 15-15" for information about creating the `SecondMax` function

Related Topics

- "ALTER FUNCTION Statement"
- "CREATE FUNCTION Statement"

DROP LIBRARY Statement

The `DROP LIBRARY` statement drops an external procedure library from the database.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

You must have the `DROP ANY LIBRARY` system privilege.

Syntax

***drop_library* ::=**



Semantics

library_name

Name of the external procedure library being dropped.

Copyright © 1996, 2025, Oracle and/or its affiliates.

IF EXISTS

Drops the library if it exists. If no such library exists, the statement is ignored without error.

Example

Example 15-38 Dropping a Library

The following statement drops the `ext_lib` library, which was created in "CREATE LIBRARY Statement":

```
DROP LIBRARY IF EXISTS ext_lib;
```

If `ext_lib` does not already exist, this statement is ignored without error. Note that the output message is the same whether or not the library exists (in this case, `Library dropped.`).

Related Topics

- "ALTER LIBRARY Statement"
- "CREATE LIBRARY Statement"

DROP PACKAGE Statement

The `DROP PACKAGE` statement drops a stored package from the database.

This statement drops the body and specification of a package.

> **Note**
>
> Do not use this statement to drop a single object from a package. Instead, re-create the package without the object using the "CREATE PACKAGE Statement" and "CREATE PACKAGE BODY Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The package must be in your schema or you must have the `DROP ANY PROCEDURE` system privilege.

Syntax

***drop_package* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

drop_package

BODY

Drops only the body of the package. If you omit this clause, then the database drops both the body and specification of the package.

When you drop only the body of a package but not its specification, the database does not invalidate dependent objects. However, you cannot invoke a procedure or stored function declared in the package specification until you re-create the package body.

IF EXISTS

Drops the package if it exists. If no such package exists, the statement is ignored without error.

schema

Name of the schema containing the package. **Default:** your schema.

package

Name of the package to be dropped.

The database invalidates any local objects that depend on the package specification. If you subsequently reference one of these objects, then the database tries to recompile the object and returns an error if you have not re-created the dropped package.

If any statistics types are associated with the package, then the database disassociates the statistics types with the `FORCE` clause and drops any user-defined statistics collected with the statistics types.

> **See Also**
>
> - *Oracle Database SQL Language Reference* for information about the `ASSOCIATE STATISTICS` statement
> - *Oracle Database SQL Language Reference* for information about the `DISASSOCIATE STATISTICS` statement

Example

Example 15-39 Dropping a Package

This statement drops the specification and body of the `emp_mgmt` package, which was created in "CREATE PACKAGE BODY Statement", invalidating all objects that depend on the specification:

```
DROP PACKAGE emp_mgmt;
```

Related Topics

- "ALTER PACKAGE Statement"
- "CREATE PACKAGE Statement"
- "CREATE PACKAGE BODY Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

DROP PROCEDURE Statement

The `DROP PROCEDURE` statement drops a standalone procedure from the database.

> **Note**
>
> Do not use this statement to remove a procedure that is part of a package. Instead, either drop the entire package using the "DROP PACKAGE Statement", or redefine the package without the procedure using the "CREATE PACKAGE Statement" with the `OR REPLACE` clause.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The procedure must be in your schema or you must have the `DROP ANY PROCEDURE` system privilege.

Syntax

***drop_procedure* ::=**



Semantics

IF EXISTS

Drops the procedure if it exists. If no such procedure exists, the statement is ignored without error.

schema

Name of the schema containing the procedure. **Default:** your schema.

procedure

Name of the procedure to be dropped.

When you drop a procedure, the database invalidates any local objects that depend upon the dropped procedure. If you subsequently reference one of these objects, then the database tries to recompile the object and returns an error message if you have not re-created the dropped procedure.

Copyright © 1996, 2025, Oracle and/or its affiliates.

Example

Example 15-40 Dropping a Procedure

This statement drops the procedure `remove_emp` owned by the user `hr` and invalidates all objects that depend upon `remove_emp`:

```
DROP PROCEDURE IF EXISTS hr.remove_emp;
```

If `remove_emp` does not already exist in the schema, this statement is ignored without error. Note that the output message is the same whether or not the procedure exists (in this case, `Procedure dropped.`).

Related Topics

- "ALTER PROCEDURE Statement"
- "CREATE PROCEDURE Statement"

DROP TRIGGER Statement

The `DROP TRIGGER` statement drops a database trigger from the database.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The trigger must be in your schema or you must have the `DROP ANY TRIGGER` system privilege. To drop a trigger on `DATABASE` in another user's schema, you must also have the `ADMINISTER DATABASE TRIGGER` system privilege.

Syntax

***drop_trigger* ::=**



Semantics

IF EXISTS

Drops the trigger if it exists. If no such trigger exists, the statement is ignored without error.

schema

Name of the schema containing the trigger. **Default:** your schema.

Copyright © 1996, 2025, Oracle and/or its affiliates.

trigger

Name of the trigger to be dropped.

Example

Example 15-41 Dropping a Trigger

This statement drops the `salary_check` trigger in the schema `hr`:

```
DROP TRIGGER hr.salary_check;
```

Related Topics

- "ALTER TRIGGER Statement"
- "CREATE TRIGGER Statement"

DROP TYPE Statement

The `DROP TYPE` statement drops the specification and body of an ADT, `VARRAY` type, or nested table type.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The ADT, `VARRAY` type, or nested table type must be in your schema or you must have the `DROP ANY TYPE` system privilege.

Syntax

***drop_type* ::=**

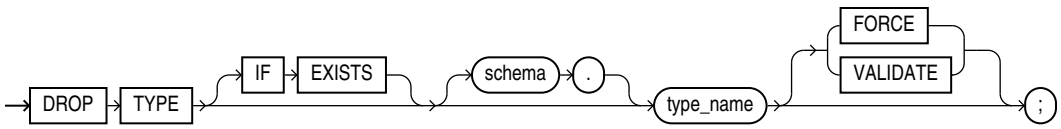

Semantics

IF EXISTS

Drops the type if it exists. If no such type exists, the statement is ignored without error.

schema

Name of the schema containing the type. **Default:** your schema.

type_name

Copyright © 1996, 2025, Oracle and/or its affiliates.

Name of the object, varray, or nested table type to be dropped. You can drop only types with no type or table dependencies.

If *type_name* is a supertype, then this statement fails unless you also specify FORCE. If you specify FORCE, then the database invalidates all subtypes depending on this supertype.

If *type_name* is a statistics type, then this statement fails unless you also specify FORCE. If you specify FORCE, then the database first disassociates all objects that are associated with *type_name* and then drops *type_name*.

See Also

- *Oracle Database SQL Language Reference* for information about the ASSOCIATE STATISTICS statement
- *Oracle Database SQL Language Reference* for information about the DISASSOCIATE STATISTICS statement

If *type_name* is an ADT that is associated with a statistics type, then the database first tries to disassociate *type_name* from the statistics type and then drops *type_name*. However, if statistics have been collected using the statistics type, then the database cannot disassociate *type_name* from the statistics type, and this statement fails.

If *type_name* is an implementation type for an index type, then the index type is marked INVALID.

If *type_name* has a public synonym defined on it, then the database also drops the synonym.

Unless you specify FORCE, you can drop only types that are standalone schema objects with no dependencies. This is the default behavior.

See Also

Oracle Database SQL Language Reference for information about the CREATE INDEXTYPE statement

FORCE

Drops the type even if it has dependent database objects. The database marks UNUSED all columns dependent on the type to be dropped, and those columns become inaccessible.

Note

Oracle recommends against specifying FORCE to drop object types with dependencies. This operation is not recoverable and might make the data in the dependent tables or columns inaccessible.

VALIDATE

Copyright © 1996, 2025, Oracle and/or its affiliates.

Causes the database to check for stored instances of this type in substitutable columns of any of its supertypes. If no such instances are found, then the database completes the drop operation.

This clause is meaningful only for subtypes. Oracle recommends the use of this option to safely drop subtypes that do not have any explicit type or table dependencies.

Example

Example 15-42 Dropping an ADT

This statement removes the ADT `person_t`. See "CREATE TYPE Statement" for the example that creates this ADT. Any columns that are dependent on `person_t` are marked `UNUSED` and become inaccessible.

```
DROP TYPE IF EXISTS person_t FORCE;
```

If `person_t` does not already exist, this statement is ignored without error. Note that the output message is the same whether or not the ADT exists (`Type dropped.`).

Related Topics

- "ALTER TYPE Statement"
- "CREATE TYPE Statement"
- "CREATE TYPE BODY Statement"

DROP TYPE BODY Statement

The `DROP TYPE BODY` statement drops the body of an ADT, `VARRAY` type, or nested table type.

When you drop a type body, the type specification still exists, and you can re-create the type body. Prior to re-creating the body, you can still use the type, although you cannot invoke its member functions.

Topics

- Prerequisites
- Syntax
- Semantics
- Example
- Related Topics

Prerequisites

The type body must be in your schema or you must have the `DROP ANY TYPE` system privilege.

Syntax

***drop_type_body* ::=**



Copyright © 1996, 2025, Oracle and/or its affiliates.

Semantics

IF EXISTS

Drops the type body if it exists. If no such type body exists, the statement is ignored without error.

schema

Name of the schema containing the type. **Default:** your schema.

type_name

Name of the type body to be dropped.

Restriction on *type_name*

You can drop a type body only if it has no type or table dependencies.

Example

Example 15-43 Dropping an ADT Body

This statement removes the ADT body `data_typ1`. See "CREATE TYPE Statement" for the example that creates this ADT.

```
DROP TYPE BODY data_typ1;
```

Related Topics

- "ALTER TYPE Statement"
- "CREATE TYPE Statement"
- "CREATE TYPE BODY Statement"

Copyright © 1996, 2025, Oracle and/or its affiliates.

A
PL/SQL Source Text Wrapping

You can wrap the PL/SQL source text for any of these stored PL/SQL units, thereby preventing anyone from displaying that text with the static data dictionary views `*_SOURCE`:

- Package specification
- Package body
- Type specification
- Type body
- Function
- Procedure

> **Note**
>
> Wrapping text is low-assurance security. For high-assurance security, use Oracle Database Vault, described in *Oracle Database Vault Administrator's Guide*.

A file containing wrapped PL/SQL source text is called a **wrapped file**. A wrapped file can be moved, backed up, or processed by SQL*Plus or the Import and Export utilities.

To produce a wrapped file, use either the PL/SQL Wrapper utility or a `DBMS_DDL` subprogram. The PL/SQL Wrapper utility wraps the source text of every wrappable PL/SQL unit created by a specified SQL file. The `DBMS_DDL` subprograms wrap the source text of single dynamically generated wrappable PL/SQL units.

Both the PL/SQL Wrapper utility and `DBMS_DDL` subprograms detect tokenization errors (for example, runaway strings), but not syntax or semantic errors (for example, nonexistent tables or views).

By default, the 12.2 PL/SQL compiler can use wrapped packages that were compiled with the 9.2 PL/SQL compiler. To prevent the 12.2 PL/SQL compiler from using wrapped packages that were compiled with the 9.2 PL/SQL compiler, set the PL/SQL compilation parameter `PERMIT_92_WRAP_FORMAT` to `FALSE`. For more information about `PERMIT_92_WRAP_FORMAT`, see *Oracle Database Reference*. For more information about PL/SQL compilation parameters, see "PL/SQL Units and Compilation Parameters".

Topics

- PL/SQL Source Text Wrapping Limitations
- PL/SQL Source Text Wrapping Guidelines
- Wrapping PL/SQL Source Text with PL/SQL Wrapper Utility
- Wrapping PL/SQL Source Text with DBMS_DDL Subprograms

Copyright © 1996, 2025, Oracle and/or its affiliates.

PL/SQL Source Text Wrapping Limitations

- Wrapped files are not downward-compatible between Oracle Database releases.

  For example, you cannot load files produced by the version *n*.1 PL/SQL Wrapper utility into a version (*n*-1).2 Oracle Database. Nor can you load files produced by the version *n*.2 PL/SQL Wrapper utility into a version *n*.1 Oracle Database. Wrapped files are both upward- and downward-compatible across patch sets.
- Wrapping PL/SQL source text is not a secure way to hide passwords or table names.

  For high-assurance security, use Oracle Database Vault, described in *Oracle Database Vault Administrator's Guide*.
- You cannot wrap the PL/SQL source text of triggers.

  To hide the implementation details of a trigger, put them in a stored subprogram, wrap the subprogram, and write a one-line trigger that invokes the subprogram.

PL/SQL Source Text Wrapping Guidelines

- Wrap only the body of a package or type, not the specification.

  Leaving the specification unwrapped allows other developers to see the information needed to use the package or type (see Example A-5). Wrapping the body prevents them from seeing the package or type implementation.
- Wrap files only after you have finished editing them.

  You cannot edit wrapped files. If a wrapped file needs changes, you must edit the original unwrapped file and then wrap it.
- Before distributing a wrapped file, view it in a text editor and ensure that all important parts are wrapped.

Wrapping PL/SQL Source Text with PL/SQL Wrapper Utility

The PL/SQL Wrapper utility takes a single SQL file (such as a SQL*Plus script) and produces an equivalent text file in which the PL/SQL source text of each wrappable PL/SQL unit is wrapped.

> **Note**
>
> Oracle recommends using PL/SQL Wrapper Utility version 10 or later.

For the list of wrappable PL/SQL units, see the introduction to "PL/SQL Source Text Wrapping".

The PL/SQL Wrapper utility cannot connect to Oracle Database. To run the PL/SQL Wrapper utility, enter this command at the operating system prompt (with no spaces around the equal signs):

```
wrap iname=input_file [ oname=output_file ] [ keep_comments=yes ]
```

input_file is the name of an existing file that contains any combination of SQL statements. *output_file* is the name of the file that the PL/SQL Wrapper utility creates—the wrapped file.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> *input_file* cannot include substitution variables specified with the SQL*Plus DEFINE notation, because *output_file* is parsed by the PL/SQL compiler, not by SQL*Plus.

The PL/SQL Wrapper utility deletes all comments from the wrapped file unless keep_comments=yes is specified. When keep_comments=yes is specified, only the comments outside the source are kept.

> **Note**
>
> If *input_file* is a wrapped file, then *input_file* and *output_file* have identical contents.

The default file extension for *input_file* is sql. The default name of *output_file* is *input_file*.plb. Therefore, these commands are equivalent:

```
wrap iname=/mydir/myfile
wrap iname=/mydir/myfile.sql oname=/mydir/myfile.plb
```

This example specifies a different file extension for *input_file* and a different name for *output_file*:

```
wrap iname=/mydir/myfile.src oname=/yourdir/yourfile.out keep_comments=yes
```

You can run *output_file* as a script in SQL*Plus. For example:

```
SQL> @myfile.plb;
```

Example A-1 SQL File with Two Wrappable PL/SQL Units

This example shows the text of a SQL file, wraptest2.sql, that contains two wrappable PL/SQL units—the procedure wraptest and the function fibonacci. The file also contains comments and a SQL SELECT statement.

```
-- The following statement will not change.

SELECT COUNT(*) FROM EMPLOYEES
/

/* The PL/SQL source text of the following two CREATE statements will be wrapped. */

CREATE PROCEDURE wraptest AUTHID CURRENT_USER /* C style comment in procedure
declaration */ IS
  TYPE emp_tab IS TABLE OF employees%ROWTYPE INDEX BY PLS_INTEGER;
  all_emps  emp_tab;
BEGIN
  SELECT * BULK COLLECT INTO all_emps FROM employees;
  FOR i IN 1..10 LOOP /* C style in pl/sql source */
    DBMS_OUTPUT.PUT_LINE('Emp Id: ' || all_emps(i).employee_id);
  END LOOP;
END;
/

CREATE OR REPLACE FUNCTION fibonacci (
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  n PLS_INTEGER
) RETURN PLS_INTEGER
AUTHID CURRENT_USER -- PL/SQL style comment inside fibonacci function spec
IS
  fib_1 PLS_INTEGER := 0;
  fib_2 PLS_INTEGER := 1;
BEGIN
  IF n = 1 THEN                              -- terminating condition
    RETURN fib_1;
  ELSIF n = 2 THEN
    RETURN fib_2;                           -- terminating condition
  ELSE
    RETURN fibonacci(n-2) + fibonacci(n-1);  -- recursive invocations
  END IF;
END;
/
```

Example A-2 Wrapping File with PL/SQL Wrapper Utility

This example uses the PL/SQL Wrapper utility to wrap `wraptest2.sql` and shows the wrapped file, `wraptest2.plb`. The wrapped file shows that the utility deleted the comments inside the code and wrapped (made unreadable) the PL/SQL source text of the procedure `wraptest` and the function `fibonacci`, but kept the comments outside the wrapped source.

Assume that the operating system prompt is >. Wrap the file `wraptest.sql`:

```
> wrap keep_comments=yes iname=wraptest2.sql
```

Result:

```
 Processing wraptest2.sql to wraptest2.plb
```

Contents of `wraptest.plb`:

```
-- The following statement will not change.

SELECT COUNT(*) FROM EMPLOYEES
/

/* The PL/SQL source text of the following two CREATE statements will be wrapped. */
CREATE OR REPLACE PROCEDURE wraptest wrapped
a000000
1
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
7
129 138
qf4HggDBeNMPlWAsPn6pGf+2LGwwg+nwJK5qZ3SVWE4+GayDZaL1bF7RwYm2/zr1qjZY3FrN
48M1bKc/MG5aY9YB+DrtT4SJN370Rpq7ck5D0sc1D5sKAwTyX13HYvRmjwkdXa0vEZ4q/mCU
EQusX23UZbZjxha7CtlCDCx8guGw/M/oHZXc8wDHXL8V8OsqQMv/Hj7z68gINl7OstalRScr
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
uSZ/l/W1YaaA9Lj8Fbx5/nJw96ZNy1SCY8VsB/G6O5f/65+EDxdThpnfU4e1vrrE9iB3/IpI
+7fE1Tv29fwc+aZq3S7O

/

CREATE OR REPLACE FUNCTION fibonacci wrapped
a000000
1
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
8
150 ff
BFDvTL9OR04SJbx+qOy5H/h8IcwwgxDcAJnWZ3TNz51mjAmegdQcpNJfq8hUuQtv1Y5xg7Wd
KqMH/HBANhnZ+E1mBWekavYjPxlqV9zIFqZAgB4SBqkqe42sai9Vb0cLEU02/ZCEyxDSfWf3
H1Lp6U9ztRXNy+oDZSNykWCUVLaZro0UmeFrNUBqzE6j9mI3AyRhPw1QbZX5oRMLgLOG3OtS
SGJsz7M+bnhnp+xP4ww+SIlxx5LhDtnyPw==

/
```

Example A-3 Running Wrapped File and Viewing Wrapped PL/SQL Units

In SQL*Plus, this example runs the wrapped file `wraptest.plb`, creating the procedure `wraptest` and the function `fibonacci`; selects the text of the subprograms (which is wrapped and therefore unreadable), and then invokes the subprograms.

```
SQL> -- Run wrapped file:
SQL>
SQL> @wraptest2.plb
SQL> -- The following statement will not change.
SQL>
SQL> SELECT COUNT(*) FROM EMPLOYEES
  2  /

  COUNT(*)
----------
       107

1 row selected.

SQL> /* The PL/SQL source text of the following two CREATE statements will be wrapped. */

SQL> CREATE PROCEDURE wraptest wrapped
   2  a000000
  3  1
  4  abcd
  5  abcd
  6  abcd
  7  abcd
  8  abcd
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  9  abcd
 10  abcd
 11  abcd
 12  abcd
 13  abcd
 14  abcd
 15  abcd
 16  abcd
 17  abcd
 18  abcd
 19  7
 20  129 138
 21  qf4HggDBeNMPlWAsPn6pGf+2LGwwg+nwJK5qZ3SVWE4+GayDZaL1bF7RwYm2/zr1qjZY3FrN
 22  48M1bKc/MG5aY9YB+DrtT4SJN370Rpq7ck5D0sc1D5sKAwTyX13HYvRmjwkdXa0vEZ4q/mCU
 23  EQusX23UZbZjxha7CtlCDCx8guGw/M/oHZXc8wDHXL8V8OsqQMv/Hj7z68gINl7OstalRScr
 24  uSZ/l/W1YaaA9Lj8Fbx5/nJw96ZNy1SCY8VsB/G6O5f/65+EDxdThpnfU4e1vrrE9iB3/IpI
 25  +7fE1Tv29fwc+aZq3S7O
 26
 27  /

Procedure created.

SQL> CREATE OR REPLACE FUNCTION fibonacci wrapped
  2  a000000
  3  1
  4  abcd
  5  abcd
  6  abcd
  7  abcd
  8  abcd
  9  abcd
 10  abcd
 11  abcd
 12  abcd
 13  abcd
 14  abcd
 15  abcd
 16  abcd
 17  abcd
 18  abcd
 19  8
 20  150 ff
 21  BFDvTL9OR04SJbx+qOy5H/h8IcwwgxDcAJnWZ3TNz51mjAmegdQcpNJfq8hUuQtv1Y5xg7Wd
 22  KqMH/HBANhnZ+E1mBWekavYjPxlqV9zIFqZAgB4SBqkqe42sai9Vb0cLEU02/ZCEyxDSfWf3
 23  H1Lp6U9ztRXNy+oDZSNykWCUVLaZro0UmeFrNUBqzE6j9mI3AyRhPw1QbZX5oRMLgLOG3OtS
 24  SGJsz7M+bnhnp+xP4ww+SIlxx5LhDtnyPw==
 25
 26  /

Function created.

SQL>
SQL> -- Try to display procedure source text:
SQL>
SQL> SELECT text FROM USER_SOURCE WHERE name='WRAPTEST';

TEXT
--------------------------------------------------------------------------------
PROCEDURE wraptest wrapped
a000000
1
abcd
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
7
129 138
qf4HggDBeNMPlWAsPn6pGf+2LGwwg+nwJK5qZ3SVWE4+GayDZaL1bF7RwYm2/zr1qjZY3FrN
48M1bKc/MG5aY9YB+DrtT4SJN370Rpq7ck5D0sc1D5sKAwTyX13HYvRmjwkdXa0vEZ4q/mCU
EQusX23UZbZjxha7CtlCDCx8guGw/M/oHZXc8wDHXL8V8OsqQMv/Hj7z68gINl7OstalRScr
uSZ/l/W1YaaA9Lj8Fbx5/nJw96ZNy1SCY8VsB/G6O5f/65+EDxdThpnfU4e1vrrE9iB3/IpI
+7fE1Tv29fwc+aZq3S7O


1 row selected.

SQL>
SQL> -- Try to display function source text:
SQL>
SQL> SELECT text FROM USER_SOURCE WHERE name='FIBONACCI';

TEXT
--------------------------------------------------------------------------------
FUNCTION fibonacci wrapped
a000000
1
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
8
150 ff
BFDvTL9OR04SJbx+qOy5H/h8IcwwgxDcAJnWZ3TNz51mjAmegdQcpNJfq8hUuQtv1Y5xg7Wd
KqMH/HBANhnZ+E1mBWekavYjPxlqV9zIFqZAgB4SBqkqe42sai9Vb0cLEU02/ZCEyxDSfWf3
H1Lp6U9ztRXNy+oDZSNykWCUVLaZro0UmeFrNUBqzE6j9mI3AyRhPw1QbZX5oRMLgLOG3OtS
SGJsz7M+bnhnp+xP4ww+SIlxx5LhDtnyPw==


1 row selected.

SQL>
SQL> BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  2    wraptest;  -- invoke procedure
  3    DBMS_OUTPUT.PUT_LINE('fibonacci(5) = ' || fibonacci(5));
  4  END;
  5  /
Emp Id: 100
Emp Id: 101
Emp Id: 102
Emp Id: 103
Emp Id: 104
Emp Id: 105
Emp Id: 106
Emp Id: 107
Emp Id: 108
Emp Id: 109
fibonacci(5) = 3

PL/SQL procedure successfully completed.

SQL>
```

Wrapping PL/SQL Source Text with DBMS_DDL Subprograms

The `DBMS_DDL` package provides `WRAP` functions and `CREATE_WRAPPED` procedures, each of which wraps the PL/SQL source text of a single dynamically generated wrappable PL/SQL unit. The `DBMS_DDL` package also provides the exception `MALFORMED_WRAP_INPUT` (ORA-24230), which is raised if the input to `WRAP` or `CREATE_WRAPPED` is not a valid wrappable PL/SQL unit. (For the list of wrappable PL/SQL units, see the introduction to "PL/SQL Source Text Wrapping".)

Each `WRAP` function takes as input a single `CREATE` statement that creates a wrappable PL/SQL unit and returns an equivalent `CREATE` statement in which the PL/SQL source text is wrapped. For more information about the `WRAP` functions, see *Oracle Database PL/SQL Packages and Types Reference*.

> **Caution**
>
> If you pass the statement that `DBMS_DDL.WRAP` returns to the `DBMS_SQL.PARSE` procedure whose formal parameter `statement` has data type `VARCHAR2A`, then you must set the `lfflg` parameter of `DBMS_SQL.PARSE` to `FALSE`. Otherwise, `DBMS_SQL.PARSE` adds lines to the wrapped PL/SQL unit, corrupting it. (For the syntax of `DBMS_SQL.PARSE`, see *Oracle Database PL/SQL Packages and Types Reference*.)

Each `CREATE_WRAPPED` procedure does what its corresponding `WRAP` function does and then runs the returned `CREATE` statement, creating the specified PL/SQL unit. For more information about the `CREATE_WRAPPED` procedures, see *Oracle Database PL/SQL Packages and Types Reference*.

> **Tip**
>
> When invoking a `DBMS_DDL` subprogram, use the fully qualified package name, `SYS.DBMS_DDL`, to avoid name conflict if someone creates a local package named `DBMS_DDL` or defines the public synonym `DBMS_DDL`.

Copyright © 1996, 2025, Oracle and/or its affiliates.

> **Note**
>
> The `CREATE` statement that is input to a `WRAP` function or `CREATE_WRAPPED` procedure runs with the privileges of the user who invoked the subprogram.

Example A-4 dynamically creates a package specification (using the `EXECUTE IMMEDIATE` statement) and a wrapped package body, using a `CREATE_WRAPPED` procedure.

Example A-5 selects the text of the package that Example A-4 created, `emp_actions`, and then invokes the procedure `emp_actions.raise_salary`. If the package specification were wrapped, then the information needed to invoke the procedure would be unreadable, like the PL/SQL source text of the package body.

Example A-4 Creating Wrapped Package Body with CREATE_WRAPPED Procedure

```
DECLARE
  package_text  VARCHAR2(32767); -- text for creating package spec and body

  FUNCTION generate_spec (pkgname VARCHAR2) RETURN VARCHAR2 AS
  BEGIN
    RETURN 'CREATE PACKAGE ' || pkgname || ' AUTHID CURRENT_USER AS
      PROCEDURE raise_salary (emp_id NUMBER, amount NUMBER);
      PROCEDURE fire_employee (emp_id NUMBER);
      END ' || pkgname || ';';
  END generate_spec;

  FUNCTION generate_body (pkgname VARCHAR2) RETURN VARCHAR2 AS
  BEGIN
    RETURN 'CREATE PACKAGE BODY ' || pkgname || ' AS
      PROCEDURE raise_salary (emp_id NUMBER, amount NUMBER) IS
      BEGIN
        UPDATE employees
          SET salary = salary + amount WHERE employee_id = emp_id;
      END raise_salary;
      PROCEDURE fire_employee (emp_id NUMBER) IS
      BEGIN
        DELETE FROM employees WHERE employee_id = emp_id;
      END fire_employee;
    END ' || pkgname || ';';
  END generate_body;

BEGIN
  package_text := generate_spec('emp_actions');  -- Generate package spec
  EXECUTE IMMEDIATE package_text;                -- Create package spec
  package_text := generate_body('emp_actions');  -- Generate package body
  SYS.DBMS_DDL.CREATE_WRAPPED(package_text);     -- Create wrapped package
body
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example A-5 Viewing Package with Wrapped Body and Invoking Package Procedure

Select text of package:

```
SELECT text FROM USER_SOURCE WHERE name = 'EMP_ACTIONS';
```

Result:

```
TEXT
--------------------------------------------------------------------------------

PACKAGE emp_actions AUTHID CURRENT_USER AS
      PROCEDURE raise_salary (emp_id NUMBER, amount NUMBER);
      PROCEDURE fire_employee (emp_id NUMBER);
      END emp_actions;
PACKAGE BODY emp_actions wrapped
a000000
1f
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
abcd
b
180 113
1fOVodewm7j9dBOmBsiEQz0BKCgwg/BKoZ4VZy/pTBIYo8Uj1sjpbEz08Ck3HMjYq/Mf0XZn
u9D0Kd+i89g9ZO61I6vZYjw2AuBidnLESyR63LHZpFD/7lyDTfF1eDY5vmNwLTXrFaxGy243
0lHKAzmOlwwfBWylkZZNi2UnpmSIe6z/BU2nhbwfpqd224p69FwYVXmFX2H5IMsdZ2/vWsK9
cDMCD1KEqOnPpbU2yXdpW3GIbGD8JFIbKAfpJLkoLfVxoRPXQfj0h1k=
```

Invoke `raised_salary` and show its effect:

```
DECLARE
  s employees.salary%TYPE;
BEGIN
  SELECT salary INTO s FROM employees WHERE employee_id=130;
  DBMS_OUTPUT.PUT_LINE('Old salary: ' || s);
  emp_actions.raise_salary(130, 100);
  SELECT salary INTO s FROM employees WHERE employee_id=130;
  DBMS_OUTPUT.PUT_LINE('New salary: ' || s);
END;
/
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
Old salary: 2800
New salary: 2900

PL/SQL procedure successfully completed.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

B

PL/SQL Name Resolution

This appendix explains PL/SQL **name resolution**; that is, how the PL/SQL compiler resolves ambiguous references to identifiers.

An unambiguous identifier reference can become ambiguous if you change identifiers in its compilation unit (that is, if you add, rename, or delete identifiers).

> **Note**
>
> The `AUTHID` property of a stored PL/SQL unit affects the name resolution of SQL statements that the unit issues at run time. For more information, see "Invoker's Rights and Definer's Rights (AUTHID Property)".

Topics

- Qualified Names and Dot Notation
- Column Name Precedence
- Differences Between PL/SQL and SQL Name Resolution Rules
- Resolution of Names in Static SQL Statements
- What is Capture?
- Avoiding Inner Capture in SELECT and DML Statements

Qualified Names and Dot Notation

When one named item belongs to another named item, you can (and sometimes must) qualify the name of the "child" item with the name of the "parent" item, using dot notation. For example:

When referencing ...	You must qualify its name with ...	Using this syntax ...
Field of a record	Name of the record	*record_name.field_name*
Method of a collection	Name of the collection	*collection_name.method*
Pseudocolumn `CURRVAL`	Name of a sequence	*sequence_name*`.CURRVAL`
Pseudocolumn `NEXTVAL`	Name of a sequence	*sequence_name*`.NEXTVAL`

If an identifier is declared in a named PL/SQL unit, you can qualify its simple name (the name in its declaration) with the name of the unit (block, subprogram, or package), using this syntax:

unit_name.simple_identifier_name

If the identifier is not visible, then you *must* qualify its name (see "Scope and Visibility of Identifiers").

Copyright © 1996, 2025, Oracle and/or its affiliates.

If an identifier belongs to another schema, then you must qualify its name with the name of the schema, using this syntax:

schema_name.package_name

A simple name can be qualified with multiple names, as Example B-1 shows.

Some examples of possibly ambiguous qualified names are:

- Field or attribute of a function return value, for example:

  func_name().*field_name*
  func_name().*attribute_name*

- Schema object owned by another schema, for example:

  schema_name.table_name
  schema_name.procedure_name()
  schema_name.type_name.member_name()

- Package object owned by another user, for example:

  schema_name.package_name.procedure_name()
  schema_name.package_name.record_name.field_name

- Record containing an ADT, for example:

  record_name.field_name.attribute_name
  record_name.field_name.member_name()

Example B-1 Qualified Names

```
CREATE OR REPLACE PACKAGE pkg1 AUTHID DEFINER AS
  m NUMBER;
  TYPE t1 IS RECORD (a NUMBER);
  v1 t1;
  TYPE t2 IS TABLE OF t1 INDEX BY PLS_INTEGER;
  v2 t2;
  FUNCTION f1 (p1 NUMBER) RETURN t1;
  FUNCTION f2 (q1 NUMBER) RETURN t2;
END pkg1;
/

CREATE OR REPLACE PACKAGE BODY pkg1 AS
  FUNCTION f1 (p1 NUMBER) RETURN t1 IS
    n NUMBER;
  BEGIN
     n := m;             -- Unqualified variable name
     n := pkg1.m;        -- Variable name qualified by package name
     n := pkg1.f1.p1;    -- Parameter name qualified by function name,
                         --  which is qualified by package name
     n := v1.a;          -- Variable name followed by component name
     n := pkg1.v1.a;     -- Variable name qualified by package name
                         --  and followed by component name
     n := v2(10).a;      -- Indexed name followed by component name
     n := f1(10).a;      -- Function invocation followed by component name
     n := f2(10)(10).a;  -- Function invocation followed by indexed name
                         --  and followed by component name
     n := hr.pkg1.f2(10)(10).a;  -- Schema name, package name,
                                 -- function invocation, index, component name
     v1.a := p1;
     RETURN v1;
   END f1;

   FUNCTION f2 (q1 NUMBER) RETURN t2 IS
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
    v_t1 t1;
    v_t2 t2;
  BEGIN
    v_t1.a := q1;
    v_t2(1) := v_t1;
    RETURN v_t2;
  END f2;
END pkg1;
/
```

Column Name Precedence

If a SQL statement references a name that belongs to both a column and either a local variable or formal parameter, then the column name takes precedence.

> ⚠ **Caution**
>
> When a variable or parameter name is interpreted as a column name, data can be deleted, changed, or inserted unintentionally.

In Example B-2, the name `last_name` belongs to both a local variable and a column (names are not case-sensitive). Therefore, in the `WHERE` clause, both references to `last_name` resolve to the column, and all rows are deleted.

Example B-3 solves the problem in Example B-2 by giving the variable a different name.

Example B-4 solves the problem in Example B-2 by labeling the block and qualifying the variable name with the block name.

In Example B-5, the function `dept_name` has a formal parameter and a local variable whose names are those of columns of the table `DEPARTMENTS`. The parameter and variable name are qualified with the function name to distinguish them from the column names.

Example B-2 Variable Name Interpreted as Column Name Causes Unintended Result

```
DROP TABLE employees2;
CREATE TABLE employees2 AS
  SELECT LAST_NAME FROM employees;

DECLARE
  last_name  VARCHAR2(10) := 'King';
BEGIN
  DELETE FROM employees2 WHERE LAST_NAME = last_name;
  DBMS_OUTPUT.PUT_LINE('Deleted ' || SQL%ROWCOUNT || ' rows.');
END;
/
```

Result:

```
Deleted 107 rows.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Example B-3 Fixing Example B-2 with Different Variable Name

```
DROP TABLE employees2;
CREATE TABLE employees2 AS
  SELECT LAST_NAME FROM employees;

DECLARE
  v_last_name  VARCHAR2(10) := 'King';
BEGIN
  DELETE FROM employees2 WHERE LAST_NAME = v_last_name;
  DBMS_OUTPUT.PUT_LINE('Deleted ' || SQL%ROWCOUNT || ' rows.');
END;
/
```

Result:

```
Deleted 2 rows.
```

Example B-4 Fixing Example B-2 with Block Label

```
DROP TABLE employees2;
CREATE TABLE employees2 AS
  SELECT LAST_NAME FROM employees;

<<main>>
DECLARE
  last_name  VARCHAR2(10) := 'King';
BEGIN
  DELETE FROM employees2 WHERE last_name = main.last_name;
  DBMS_OUTPUT.PUT_LINE('Deleted ' || SQL%ROWCOUNT || ' rows.');
END;
/
```

Result:

```
Deleted 2 rows.
```

Example B-5 Subprogram Name for Name Resolution

```
DECLARE
  FUNCTION dept_name (department_id IN NUMBER)
    RETURN departments.department_name%TYPE
  IS
    department_name  departments.department_name%TYPE;
  BEGIN
    SELECT department_name INTO dept_name.department_name
      --    ^column              ^local variable
    FROM departments
    WHERE department_id = dept_name.department_id;
    --     ^column          ^formal parameter
    RETURN department_name;
  END dept_name;
BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  FOR item IN (
    SELECT department_id
    FROM departments
    ORDER BY department_name) LOOP

      DBMS_OUTPUT.PUT_LINE ('Department: ' || dept_name(item.department_id));
  END LOOP;
END;
/
```

Result:

```
Department: Accounting
Department: Administration
Department: Benefits
Department: Construction
Department: Contracting
Department: Control And Credit
Department: Corporate Tax
Department: Executive
Department: Finance
Department: Government Sales
Department: Human Resources
Department: IT
Department: IT Helpdesk
Department: IT Support
Department: Manufacturing
Department: Marketing
Department: NOC
Department: Operations
Department: Payroll
Department: Public Relations
Department: Purchasing
Department: Recruiting
Department: Retail Sales
Department: Sales
Department: Shareholder Services
Department: Shipping
Department: Treasury
```

Differences Between PL/SQL and SQL Name Resolution Rules

PL/SQL and SQL name resolution rules are very similar. However:

- PL/SQL rules are less permissive than SQL rules.

  Because most SQL rules are context-sensitive, they recognize as legal more situations than PL/SQL rules do.

- PL/SQL and SQL resolve qualified names differently.

  For example, when resolving the table name `HR.JOBS`:

  - PL/SQL searches first for packages, types, tables, and views named `HR` in the current schema, then for public synonyms, and finally for objects named `JOBS` in the `HR` schema.

Copyright © 1996, 2025, Oracle and/or its affiliates.

- SQL searches first for objects named `JOBS` in the `HR` schema, and then for packages, types, tables, and views named `HR` in the current schema.

To avoid problems caused by the few differences between PL/SQL and SQL name resolution rules, follow the recommendations in "Avoiding Inner Capture in SELECT and DML Statements".

> **Note**
>
> When the PL/SQL compiler processes a static SQL statement, it sends that statement to the SQL subsystem, which uses SQL rules to resolve names in the statement. For details, see "Resolution of Names in Static SQL Statements".

Resolution of Names in Static SQL Statements

Static SQL is described in PL/SQL Static SQL.

When the PL/SQL compiler finds a static SQL statement:

1. If the statement is a `SELECT` statement, the PL/SQL compiler removes the `INTO` clause.
2. The PL/SQL compiler sends the statement to the SQL subsystem.
3. The SQL subsystem checks the syntax of the statement.

   If the syntax is incorrect, the compilation of the PL/SQL unit fails. If the syntax is correct, the SQL subsystem determines the names of the tables and tries to resolve the other names in the scope of the SQL statement.
4. If the SQL subsystem cannot resolve a name in the scope of the SQL statement, then it sends the name back to the PL/SQL compiler. The name is called an **escaped identifier**.
5. The PL/SQL compiler tries to resolve the escaped identifier.

   First, the compiler tries to resolve the identifier in the scope of the PL/SQL unit. If that fails, the compiler tries to resolve the identifier in the scope of the schema. If that fails, the compilation of the PL/SQL unit fails.
6. If the compilation of the PL/SQL unit succeeds, the PL/SQL compiler generates the text of the regular SQL statement that is equivalent to the static SQL statement and stores that text with the generated computer code.
7. At run time, the PL/SQL runtime system invokes routines that parse, bind, and run the regular SQL statement.

   The bind variables are the escaped identifiers (see step 4).
8. If the statement is a `SELECT` statement, the PL/SQL runtime system stores the results in the PL/SQL targets specified in the `INTO` clause that the PL/SQL compiler removed in step 1.

> **Note**
>
> Bind variables can be evaluated in any order. If a program determines order of evaluation, then at the point where the program does so, its behavior is undefined.

Copyright © 1996, 2025, Oracle and/or its affiliates.

What is Capture?

When a declaration or definition prevents the compiler from correctly resolving a reference in another scope, the declaration or definition is said to **capture** the reference. Capture is usually the result of migration or schema evolution.

Topics

- Outer Capture
- Same-Scope Capture
- Inner Capture

> **Note**
>
> Same-scope and inner capture occur only in SQL scope.

Outer Capture

Outer capture occurs when a name in an inner scope, which had resolved to an item in an inner scope, now resolves to an item in an outer scope. Both PL/SQL and SQL are designed to prevent outer capture; you need not be careful to avoid it.

Same-Scope Capture

Same-scope capture occurs when a column is added to one of two tables used in a join, and the new column has the same name as a column in the other table. When only one table had a column with that name, the name could appear in the join unqualified. Now, to avoid same-scope capture, you must qualify the column name with the appropriate table name, everywhere that the column name appears in the join.

Inner Capture

Inner capture occurs when a name in an inner scope, which had resolved to an item in an outer scope, now either resolves to an item in an inner scope or cannot be resolved. In the first case, the result might change. In the second case, an error occurs.

In Example B-6, a new column captures a reference to an old column with the same name. Before new column `col2` is added to table `tab2`, `col2` resolves to `tab1.col2`; afterward, it resolves to `tab2.col2`.

To avoid inner capture, follow the rules in "Avoiding Inner Capture in SELECT and DML Statements".

Example B-6 Inner Capture of Column Reference

Table `tab1` has a column named `col2`, but table `tab2` does not:

```
DROP TABLE tab1;
CREATE TABLE tab1 (col1 NUMBER, col2 NUMBER);
INSERT INTO tab1 (col1, col2) VALUES (100, 10);

DROP TABLE tab2;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
CREATE TABLE tab2 (col1 NUMBER);
INSERT INTO tab2 (col1) VALUES (100);
```

Therefore, in the inner `SELECT` statement, the reference to `col2` resolves to column `tab1.col2`:

```
CREATE OR REPLACE PROCEDURE proc AUTHID DEFINER AS
  CURSOR c1 IS
    SELECT * FROM tab1
    WHERE EXISTS (SELECT * FROM tab2 WHERE col2 = 10);
BEGIN
  OPEN c1;
  CLOSE c1;
END;
/
```

Add a column named `col2` to table `tab2`:

```
ALTER TABLE tab2 ADD (col2 NUMBER);
```

Now procedure `proc` is invalid. At its next invocation, the database automatically recompiles it, and the reference to `col2` in the inner `SELECT` statement resolves to column `tab2.col2`.

Avoiding Inner Capture in SELECT and DML Statements

Avoid inner capture of references in `SELECT`, `SELECT INTO`, and DML statements by following these recommendations:

- Specify a unique alias for each table in the statement.
- Do not specify a table alias that is the name of a schema that owns an item referenced in the statement.
- Qualify each column reference in the statement with the appropriate table alias.

In Example B-7, schema `hr` owns tables `tab1` and `tab2`. Table `tab1` has a column named `tab2`, whose Abstract Data Type (ADT) has attribute `a`. Table `tab2` does not have a column named `a`. Against recommendation, the query specifies alias `hr` for table `tab1` and references table `tab2`. Therefore, in the query, the reference `hr.tab2.a` resolves to table `tab1`, column `tab2`, attribute `a`. Then the example adds column `a` to table `tab2`. Now the reference `hr.tab2.a` in the query resolves to schema `hr`, table `tab2`, column `a`. Column `a` of table `tab2` captures the reference to attribute `a` in column `tab2` of table `tab1`.

Topics

- Qualifying References to Attributes and Methods
- Qualifying References to Row Expressions

Example B-7 Inner Capture of Attribute Reference

```
CREATE OR REPLACE TYPE type1 AS OBJECT (a NUMBER);
/
DROP TABLE tab1;
CREATE TABLE tab1 (tab2 type1);
INSERT INTO tab1 (tab2) VALUES (type1(10));

DROP TABLE tab2;
CREATE TABLE tab2 (x NUMBER);
INSERT INTO tab2 (x) VALUES (10);

/* Alias tab1 with same name as schema name,
   a bad practice used here for illustration purpose.
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
   Note lack of alias in second SELECT statement. */

SELECT * FROM tab1 hr
WHERE EXISTS (SELECT * FROM hr.tab2 WHERE x = hr.tab2.a);
```

Result:

```
TAB2(A)
---------------

TYPE1(10)

1 row selected.
```

Add a column named `a` to table `tab2` (which belongs to schema `hr`):

```
ALTER TABLE tab2 ADD (a NUMBER);
```

Now, when the query runs, `hr.tab2.a` resolves to schema `hr`, table `tab2`, column `a`. To avoid this inner capture, apply the recommendations to the query:

```
SELECT * FROM hr.tab1 p1
WHERE EXISTS (SELECT * FROM hr.tab2 p2 WHERE p2.x = p1.tab2.a);
```

Qualifying References to Attributes and Methods

To reference an attribute or method of a table element, you must give the table an alias and use the alias to qualify the reference to the attribute or method.

In Example B-8, table `tbl1` has column `col1` of data type `t1`, an ADT with attribute `x`. The example shows several correct and incorrect references to `tbl1.col1.x`.

Example B-8 Qualifying ADT Attribute References

```
CREATE OR REPLACE TYPE t1 AS OBJECT (x NUMBER);
/
DROP TABLE tb1;
CREATE TABLE tb1 (col1 t1);
```

The references in the following `INSERT` statements do not need aliases, because they have no column lists:

```
BEGIN
  INSERT INTO tb1 VALUES ( t1(10) );
  INSERT INTO tb1 VALUES ( t1(20) );
  INSERT INTO tb1 VALUES ( t1(30) );
END;
/
```

The following references to the attribute `x` cause error ORA-00904:

```
UPDATE tb1 SET col1.x = 10 WHERE col1.x = 20;

UPDATE tb1 SET tb1.col1.x = 10 WHERE tb1.col1.x = 20;

UPDATE hr.tb1 SET hr.tb1.col1.x = 10 WHERE hr.tb1.col1.x = 20;

DELETE FROM tb1 WHERE tb1.col1.x = 10;
```

The following references to the attribute `x`, with table aliases, are correct:

Copyright © 1996, 2025, Oracle and/or its affiliates.

```
UPDATE hr.tb1 t SET t.col1.x = 10 WHERE t.col1.x = 20;

DECLARE
  y NUMBER;
BEGIN
  SELECT t.col1.x INTO y FROM tb1 t WHERE t.col1.x = 30;
END;
/

DELETE FROM tb1 t WHERE t.col1.x = 10;
```

Qualifying References to Row Expressions

Row expressions must resolve as references to table aliases. A row expression can appear in the SET clause of an UPDATE statement or be the parameter of the SQL function REF or VALUE.

In Example B-9, table ot1 is a standalone nested table of elements of data type t1, an ADT with attribute x. The example shows several correct and incorrect references to row expressions.

Example B-9 Qualifying References to Row Expressions

```
CREATE OR REPLACE TYPE t1 AS OBJECT (x number);
/
DROP TABLE ot1;
CREATE TABLE ot1 OF t1;

BEGIN
  INSERT INTO ot1 VALUES (t1(10));
  INSERT INTO ot1 VALUES (20);
  INSERT INTO ot1 VALUES (30);
END;
/
```

The following references cause error ORA-00904:

```
UPDATE ot1 SET VALUE(ot1.x) = t1(20) WHERE VALUE(ot1.x) = t1(10);

DELETE FROM ot1 WHERE VALUE(ot1) = (t1(10));
```

The following references, with table aliases, are correct:

```
UPDATE ot1 o SET o = (t1(20)) WHERE o.x = 10;

DECLARE
  n_ref  REF t1;
BEGIN
  SELECT REF(o) INTO n_ref FROM ot1 o WHERE VALUE(o) = t1(30);
END;
/

DECLARE
  n t1;
BEGIN
  SELECT VALUE(o) INTO n FROM ot1 o WHERE VALUE(o) = t1(30);
END;
/

DECLARE
  n NUMBER;
BEGIN
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
  SELECT o.x INTO n FROM ot1 o WHERE o.x = 30;
END;
/

DELETE FROM ot1 o WHERE VALUE(o) = (t1(20));
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

C

PL/SQL Program Limits

This appendix describes the program limits that are imposed by the PL/SQL language. PL/SQL is based on the programming language Ada. As a result, PL/SQL uses a variant of Descriptive Intermediate Attributed Notation for Ada (DIANA), a tree-structured intermediate language. It is defined using a metanotation called Interface Definition Language (IDL). DIANA is used internally by compilers and other tools.

At compile time, PL/SQL source text is translated into system code. Both the DIANA and system code for a subprogram or package are stored in the database. At run time, they are loaded into the shared memory pool. The DIANA is used to compile dependent subprograms; the system code simply runs.

In the shared memory pool, a package specification, ADT specification, standalone subprogram, or anonymous block is limited to 67108864 (2**26) DIANA nodes which correspond to tokens such as identifiers, keywords, operators, and so on. This allows for ~6,000,000 lines of code unless you exceed limits imposed by the PL/SQL compiler, some of which are given in Table C-1.

Table C-1 PL/SQL Compiler Limits

Item	Limit
bind variables passed to a program unit	32768
exception handlers in a program unit	65536
fields in a record	65536
levels of block nesting	255
levels of record nesting	32
levels of subquery nesting	254
levels of label nesting	98
levels of nested collections	no predefined limit
magnitude of a `PLS_INTEGER` or `BINARY_INTEGER` value	-2147483648..2147483647
number of formal parameters in an explicit cursor, function, or procedure	65536
objects referenced by a program unit	65536
precision of a `FLOAT` value (binary digits)	126
precision of a `NUMBER` value (decimal digits)	38
precision of a `REAL` value (binary digits)	63
size of an identifier (bytes)	128
size of a string literal (bytes)	32767
size of a `CHAR` value (bytes)	32767
size of a `LONG` value (bytes)	32760
size of a `LONG RAW` value (bytes)	32760
size of a `RAW` value (bytes)	32767

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table C-1 (Cont.) PL/SQL Compiler Limits

Item	Limit
size of a VARCHAR2 value (bytes)	32767
size of an NCHAR value (bytes)	32767
size of an NVARCHAR2 value (bytes)	32767
size of a BFILE value (bytes)	4G * value of DB_BLOCK_SIZE parameter
size of a BLOB value (bytes)	4G * value of DB_BLOCK_SIZE parameter
size of a CLOB value (bytes)	4G * value of DB_BLOCK_SIZE parameter
size of an NCLOB value (bytes)	4G * value of DB_BLOCK_SIZE parameter
size of a trigger	32 K

To estimate how much memory a program unit requires, you can query the static data dictionary view USER_OBJECT_SIZE. The column PARSED_SIZE returns the size (in bytes) of the "flattened" DIANA. For example:

```
CREATE OR REPLACE PACKAGE pkg1 AS
  TYPE numset_t IS TABLE OF NUMBER;
  FUNCTION f1(x NUMBER) RETURN numset_t PIPELINED;
END pkg1;
/

CREATE OR REPLACE PACKAGE BODY pkg1 AS
  -- FUNCTION f1 returns a collection of elements (1,2,3,... x)
  FUNCTION f1(x NUMBER) RETURN numset_t PIPELINED IS
  BEGIN
    FOR i IN 1..x LOOP
      PIPE ROW(i);
    END LOOP;
    RETURN;
  END f1;
END pkg1;
/
```

SQL*Plus commands for formatting results of next query:

```
COLUMN name FORMAT A4
COLUMN type FORMAT A12
COLUMN source_size FORMAT 999
COLUMN parsed_size FORMAT 999
COLUMN code_size FORMAT 999
COLUMN error_size FORMAT 999
```

Query:

```
SELECT * FROM user_object_size WHERE name = 'PKG1' ORDER BY type;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

Result:

```
NAME TYPE         SOURCE_SIZE PARSED_SIZE CODE_SIZE ERROR_SIZE
---- ------------ ----------- ----------- --------- ----------
PKG1 PACKAGE              112         498       310          79
PKG1 PACKAGE BODY         233         106       334          0
```

Unfortunately, you cannot estimate the number of DIANA nodes from the parsed size. Two program units with the same parsed size might require 1500 and 2000 DIANA nodes, respectively because, for example, the second unit contains more complex SQL statements.

When a PL/SQL block, subprogram, package, or schema-level user-defined type exceeds a size limit, you get an error such as `PLS-00123: program too large`. Typically, this problem occurs with packages or anonymous blocks. With a package, the best solution is to divide it into smaller packages. With an anonymous block, the best solution is to redefine it as a group of subprograms, which can be stored in the database.

For more information about the limits on data types, see PL/SQL Data Types.

Copyright © 1996, 2025, Oracle and/or its affiliates.

D

PL/SQL Reserved Words and Keywords

Reserved words (listed in Table D-1) and **keywords** (listed in Table D-2) are identifiers that have special meaning in PL/SQL. They are case-insensitive. For more information about them, see "Reserved Words and Keywords".

> **Note**
>
> Some of the words in this appendix are also reserved by SQL. You can display them with the dynamic performance view `V$RESERVED_WORDS`. For information about this view, see *Oracle Database Reference*.

Table D-1 PL/SQL Reserved Words

Begins with:	Reserved Words
A	ALL, ALTER, AND, ANY, AS, ASC, AT
B	BEGIN, BETWEEN, BY
C	CASE, CHECK, CLUSTERS, CLUSTER, COLAUTH, COLUMNS, COMPRESS, CONNECT, CRASH, CREATE, CURSOR
D	DECLARE, DEFAULT, DESC, DISTINCT, DROP
E	ELSE, END, EXCEPTION, EXCLUSIVE
F	FETCH, FOR, FROM, FUNCTION
G	GOTO, GRANT, GROUP
H	HAVING
I	IDENTIFIED, IF, IN, INDEX, INDEXES, INSERT, INTERSECT, INTO, IS
L	LIKE, LOCK
M	MINUS, MODE
N	NOCOMPRESS, NOT, NOWAIT, NULL
O	OF, ON, OPTION, OR, ORDER, OVERLAPS
P	PROCEDURE, PUBLIC
R	RESOURCE, REVOKE
S	SELECT, SHARE, SIZE, SQL, START, SUBTYPE
T	TABAUTH, TABLE, THEN, TO, TYPE
U	UNION, UNIQUE, UPDATE
V	VALUES, VIEW, VIEWS
W	WHEN, WHERE, WITH

Copyright © 1996, 2025, Oracle and/or its affiliates.

Table D-2 PL/SQL Keywords

Begins with:	Keywords
A	A, ADD, ACCESSIBLE, AGENT, AGGREGATE, ARRAY, ATTRIBUTE, AUTHID, AVG
B	BFILE_BASE, BINARY, BLOB_BASE, BLOCK, BODY, BOTH, BOUND, BULK, BYTE
C	C, CALL, CALLING, CASCADE, CHAR, CHAR_BASE, CHARACTER, CHARSET, CHARSETFORM, CHARSETID, CLOB_BASE, CLONE, CLOSE, COLLECT, COMMENT, COMMIT, COMMITTED, COMPILED, CONSTANT, CONSTRUCTOR, CONTEXT, CONTINUE, CONVERT, COUNT, CREDENTIAL, CURRENT, CUSTOMDATUM
D	DANGLING, DATA, DATE, DATE_BASE, DAY, DEFINE, DELETE, DETERMINISTIC, DIRECTORY, DOUBLE, DURATION
E	ELEMENT, ELSIF, EMPTY, ESCAPE, EXCEPT, EXCEPTIONS, EXECUTE, EXISTS, EXIT, EXTERNAL
F	FINAL, FIRST, FIXED, FLOAT, FORALL, FORCE
G	GENERAL
H	HASH, HEAP, HIDDEN, HOUR
I	IMMEDIATE, IMMUTABLE, INCLUDING, INDICATOR, INDICES, INFINITE, INSTANTIABLE, INT, INTERFACE, INTERVAL, INVALIDATE, ISOLATION
J	JAVA
L	LANGUAGE, LARGE, LEADING, LENGTH, LEVEL, LIBRARY, LIKE2, LIKE4, LIKEC, LIMIT, LIMITED, LOCAL, LONG, LOOP
M	MAP, MAX, MAXLEN, MEMBER, MERGE, MIN, MINUTE, MOD, MODIFY, MONTH, MULTISET, MUTABLE
N	NAME, NAN, NATIONAL, NATIVE, NCHAR, NEW, NOCOPY, NUMBER_BASE
O	OBJECT, OCICOLL, OCIDATE, OCIDATETIME, OCIDURATION, OCIINTERVAL, OCILOBLOCATOR, OCINUMBER, OCIRAW, OCIREF, OCIREFCURSOR, OCIROWID, OCISTRING, OCITYPE, OLD, ONLY, OPAQUE, OPEN, OPERATOR, ORACLE, ORADATA, ORGANIZATION, ORLANY, ORLVARY, OTHERS, OUT, OVERRIDING
P	PACKAGE, PARALLEL_ENABLE, PARAMETER, PARAMETERS, PARENT, PARTITION, PASCAL, PERSISTABLE, PIPE, PIPELINED, PLUGGABLE, POLYMORPHIC, PRAGMA, PRECISION, PRIOR, PRIVATE
R	RAISE, RANGE, RAW, READ, RECORD, REF, REFERENCE, RELIES_ON, REM, REMAINDER, RENAME, RESULT, RESULT_CACHE, RETURN, RETURNING, REVERSE, ROLLBACK, ROW
S	SAMPLE, SAVE, SAVEPOINT, SB1, SB2, SB4, SECOND, SEGMENT, SELF, SEPARATE, SEQUENCE, SERIALIZABLE, SET, SHORT, SIZE_T, SOME, SPARSE, SQLCODE, SQLDATA, SQLNAME, SQLSTATE, STANDARD, STATIC, STDDEV, STORED, STRING, STRUCT, STYLE, SUBMULTISET, SUBPARTITION, SUBSTITUTABLE, SUM, SYNONYM
T	TDO, THE, TIME, TIMESTAMP, TIMEZONE_ABBR, TIMEZONE_HOUR, TIMEZONE_MINUTE, TIMEZONE_REGION, TRAILING, TRANSACTION, TRANSACTIONAL, TRUSTED
U	UB1, UB2, UB4, UNDER, UNPLUG, UNSIGNED, UNTRUSTED, USE, USING
V	VALIST, VALUE, VARIABLE, VARIANCE, VARRAY, VARYING, VOID
W	WHILE, WORK, WRAPPED, WRITE
Y	YEAR
Z	ZONE

Copyright © 1996, 2025, Oracle and/or its affiliates.

E

PL/SQL Predefined Data Types

This appendix groups by data type family the data types and subtypes that the package `STANDARD` predefines.

Constants

This constant defines the maximum name length possible.

```
ORA_MAX_NAME_LEN CONSTANT PLS_INTEGER := 128;
```

BFILE Data Type Family

```
type BFILE is BFILE_BASE;
```

BLOB Data Type Family

```
type BLOB is BLOB_BASE;

subtype "BINARY LARGE OBJECT" is BLOB;
```

BOOLEAN Data Type Family

```
type BOOLEAN is (FALSE, TRUE);
```

CHAR Data Type Family

```
type VARCHAR2 is new CHAR_BASE;
type MLSLABEL is new CHAR_BASE;
type UROWID   is new CHAR_BASE;

DBMS_ID and DBMS_QUOTED_ID define the length of identifiers in objects for SQL, PL/SQL
and users.
subtype DBMS_ID              is VARCHAR2(ORA_MAX_NAME_LEN);
subtype DBMS_QUOTED_ID       is VARCHAR2(ORA_MAX_NAME_LEN+2);

DBMS_ID_30 and DBMS_QUOTED_ID_30 define the length of SQL objects whose limits is 30
bytes.
subtype DBMS_ID_30           is VARCHAR2(30);
subtype DBMS_QUOTED_ID_30    is VARCHAR2(32);

subtype VARCHAR              is VARCHAR2;
subtype STRING               is VARCHAR2;
subtype LONG                 is VARCHAR2(32760);
subtype RAW                  is VARCHAR2;
subtype "LONG RAW"           is RAW(32760);
subtype ROWID                is VARCHAR2(256);
subtype CHAR                 is VARCHAR2;
subtype CHARACTER            is CHAR;
subtype "CHARACTER VARYING"  is VARCHAR;
subtype "CHAR VARYING"       is VARCHAR;
subtype "NATIONAL CHARACTER" is CHAR CHARACTER SET NCHAR_CS;
subtype "NATIONAL CHAR"      is CHAR CHARACTER SET NCHAR_CS;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
subtype "NCHAR"             is CHAR CHARACTER SET NCHAR_CS;
subtype "NVARCHAR2"         is VARCHAR2 CHARACTER SET NCHAR_CS;
```

CLOB Data Type Family

```
type CLOB is CLOB_BASE;

subtype "CHARACTER LARGE OBJECT"          is CLOB;
subtype "CHAR LARGE OBJECT"               is CLOB;
subtype "NATIONAL CHARACTER LARGE OBJECT" is CLOB CHARACTER SET NCHAR_CS;
subtype "NCHAR LARGE OBJECT"              is CLOB CHARACTER SET NCHAR_CS;
subtype "NCLOB"                           is CLOB CHARACTER SET NCHAR_CS;
```

DATE Data Type Family

```
type DATE                             is     DATE_BASE;

type TIMESTAMP                        is new DATE_BASE;

type "TIMESTAMP WITH TIME ZONE"       is new DATE_BASE;
type "INTERVAL YEAR TO MONTH"         is new DATE_BASE;
type "INTERVAL DAY TO SECOND"         is new DATE_BASE;
type "TIMESTAMP WITH LOCAL TIME ZONE" is new DATE_BASE;

subtype TIME_UNCONSTRAINED          is TIME(9);
subtype TIME_TZ_UNCONSTRAINED       is TIME(9) WITH TIME ZONE;
subtype TIMESTAMP_UNCONSTRAINED     is TIMESTAMP(9);
subtype TIMESTAMP_TZ_UNCONSTRAINED  is TIMESTAMP(9) WITH TIME ZONE;
subtype YMINTERVAL_UNCONSTRAINED    is INTERVAL YEAR(9) TO MONTH;
subtype DSINTERVAL_UNCONSTRAINED    is INTERVAL DAY(9) TO SECOND (9);
subtype TIMESTAMP_LTZ_UNCONSTRAINED is TIMESTAMP(9) WITH LOCAL TIME ZONE;
```

JSON Data Type Family

```
type JSON is BLOB_BASE;
```

NUMBER Data Type Family

```
type NUMBER is NUMBER_BASE;

subtype FLOAT              is NUMBER; -- NUMBER(126)
subtype REAL               is FLOAT;   -- FLOAT(63)
subtype "DOUBLE PRECISION" is FLOAT;

subtype INTEGER  is NUMBER(38,0);
subtype INT      is INTEGER;
subtype SMALLINT is NUMBER(38,0);

subtype DECIMAL is NUMBER(38,0);
subtype NUMERIC is DECIMAL;
subtype DEC     is DECIMAL;

subtype BINARY_INTEGER is INTEGER range '-2147483647'..2147483647;
subtype NATURAL        is BINARY_INTEGER range 0..2147483647;
subtype NATURALN       is NATURAL not null;
subtype POSITIVE       is BINARY_INTEGER range 1..2147483647;
subtype POSITIVEN      is POSITIVE not null;
subtype SIGNTYPE       is BINARY_INTEGER range '-1'..1;  -- for SIGN functions
subtype PLS_INTEGER    is BINARY_INTEGER;

type BINARY_FLOAT  is NUMBER;
type BINARY_DOUBLE is NUMBER;
```


Copyright © 1996, 2025, Oracle and/or its affiliates.

```
subtype SIMPLE_INTEGER is BINARY_INTEGER NOT NULL;
subtype SIMPLE_FLOAT   is BINARY_FLOAT   NOT NULL;
subtype SIMPLE_DOUBLE  is BINARY_DOUBLE  NOT NULL;
```

See Also

- PL/SQL Data Types for more information about PL/SQL data types
- "User-Defined PL/SQL Subtypes" for information that also applies to predefined subtypes

Copyright © 1996, 2025, Oracle and/or its affiliates.

Index

Symbols

_ wildcard character, *39*
% wildcard character, *39*
%BULK_EXCEPTIONS cursor attribute, *20*
%BULK_ROWCOUNT cursor attribute, *23*
%FOUND cursor attribute
  for implicit cursor, *7*
  for named cursor, *21*
%ISOPEN cursor attribute
  for implicit cursor, *7*
  for named cursor, *20*
%NOTFOUND cursor attribute
  for implicit cursor, *8*
  for named cursor, *22*
%ROWCOUNT cursor attribute
  for implicit cursor, *8*
  for named cursor, *23*
%ROWTYPE attribute, *56*
  column alias and, *15*
  explicit cursor and, *15*
  invisible columns and, *60*
  syntax diagram, *160*
  virtual columns and, *59*
%TYPE attribute, *18*
  initial value and, *18*
  NOT NULL constraint and, *18*
  syntax diagram, *187*
$$PLSQL_LINE inquiry directive, *56*
$$PLSQL_UNIT inquiry directive, *56*
$$PLSQL_UNIT_OWNER inquiry directive, *56*
$$PLSQL_UNIT_TYPE inquiry directive, *56*

A

Abstract Data Type (ADT), *8*, *12*
  creating, *67*
accent-insensitive comparison, *38*
ACCESS_INTO_NULL exception, *10*
ACCESSIBLE BY clause, *1*, *3*
  in CREATE FUNCTION statement, *24*
  in CREATE PACKAGE statement, *34*
  in CREATE PROCEDURE statement, *42*
  in CREATE TYPE BODY statement, *79*
  in CREATE TYPE statement, *67*
  in package specification, *1*
ACCESSIBLE BY clause *(continued)*
  in subprogram, *2*
accessor, *3*
accessor list, *3*
ADT
  See Abstract Data Type (ADT)
aggregate, *18*
AGGREGATE clause, *8*
  in CREATE FUNCTION statement, *24*
aggregate function, *24*
  in PL/SQL expression, *47*
  pipelined table function as, *48*
  SQL%NOTFOUND attribute and, *8*
alias
  column
    in cursor FOR LOOP, *25*
    in explicit cursor, *15*
  table
    for avoiding inner capture, *B-8*
    for row expression, *B-10*
    for table element attribute or method, *B-9*
aliasing (problem)
  SELECT BULK COLLECT INTO statement and, *27*
  subprogram parameter, *19*
ALTER FUNCTION statement, *2*
ALTER LIBRARY statement, *4*
ALTER PACKAGE statement, *6*
ALTER PROCEDURE statement, *8*
ALTER TRIGGER statement, *10*
ALTER TYPE statement, *12*
AND operator, *31*
anonymous block, *4*
  AUTHID property and, *52*
ANYDATA data type, *43*
ANYDATASET data type, *43*
ANYTYPE data type, *43*
application common object
  metadata-linked, *168*
architecture of PL/SQL, *10*
array
  associative
    See associative array, *2*
  non-PL/SQL, *2*

Copyright © 1996, 2025, Oracle and/or its affiliates.

assignment of value
to composite variable
collection, *23*
record, *61*
to scalar variable, *24*
assignment statement, *25*
syntax diagram, *9*
associative array, *4*
characteristics of, *2*
comparisons, *29*
declaring constant, *7*
FIRST and LAST methods for, *40*
in FORALL statement, *103*
NLS parameters and, *8*
See also collection
atomic (lexical) unit, *4*
atomically null collection
See null collection
attribute
%ROWTYPE
See %ROWTYPE attribute, *56*
%TYPE
See %TYPE attribute, *18*
cursor
See cursor attribute, *5*
AUTHID property, *52*
syntax diagram, *118*
autonomous routine, *53*
declaring, *55*
autonomous transaction, *53*
controlling, *57*
pipelined table function in, *137*
autonomous trigger, *58*
AUTONOMOUS_TRANSACTION pragma, *55*
for pipelined table function, *43*
syntax diagram, *12*

B

bag data structure, *2*
base type, *1*
basic LOOP statement, *10*
syntax diagram, *13*
BETWEEN operator, *40*
BINARY_DOUBLE data type
predefined constants for, *2*
subtype of, *3*
tuning code and, *9*
BINARY_FLOAT data type
predefined constants for, *2*
subtype of, *3*
tuning code and, *9*
BINARY_INTEGER data type
See PLS_INTEGER data type
bind variable
avoiding SQL injection with, *23*
bind variable *(continued)*
placeholder for
See placeholder for bind variable, *2*
blank-padding
in assignment, *25*
in comparison, *25*
block, *4*
syntax diagram, *15*
BOOLEAN data type, *3*
BOOLEAN expression, *42*
BOOLEAN static expression, *51*
BOOLEAN variable, *27*
built-in function
See SQL function
bulk binding, *11*
BULK COLLECT clause, *25*, *37*
aliasing and, *27*
of FETCH statement, *33*
of RETURNING INTO clause
FORALL statement and, *39*
of SELECT INTO statement, *25*
query result set processing and, *25*
that returns no rows, *25*
bulk SQL, *11*
in compound DML trigger, *11*

C

C declaration, *24*
C procedure, invoking, *55*
cache, function result, *37*
calculated column
See virtual column
call specification, *55*
in CREATE FUNCTION statement, *24*
in CREATE PROCEDURE statement, *42*
in CREATE TYPE statement, *67*
in package, *1*
syntax diagram, *24*
call stack, AUTHID property and, *52*
capture, *B-7*
cascading triggers, *45*
CASE expression
searched, *45*
simple, *43*
case sensitivity
character comparison and, *38*
character literal and, *10*
identifier and, *5*
quoted user-defined identifier, *8*
keyword and, *D-1*
LIKE operator and, *39*
reserved word and, *D-1*
CASE statement, *1*
searched, *8*
syntax diagram, *27*

Copyright © 1996, 2025, Oracle and/or its affiliates.

CASE statement *(continued)*
simple, *6*
IF THEN ELSIF statement and, *4*
syntax diagram, *27*
CASE_NOT_FOUND exception, *10*
case-insensitive comparison, *38*
CHAR data type, *23*
CHAR data type family, *E-1*
character code, *1*
character literal, *10*
See also string
character set, *1*
CLOB data type and comparison operator, *36*
CLOB data type family, *E-1*
CLOSE statement, *30*
collating sequence, *38*
collation, *55*
collection, *1*, *4*, *10*, *13*
as public package item, *48*
assigning one to another, *23*
comparing one to another, *29*
cursor variable and, *51*
declaration syntax, *34*
empty, *2*
creating with constructor, *16*
index
See index collection, *15*
internal size of
DELETE method and, *33*
EXTEND method and, *37*
TRIM method and, *36*
multidimensional, *27*
null, *2*
assigning to collection variable, *24*
pipelined table function and, *42*
querying
with dynamic SQL, *8*
with static SQL, *37*
retrieving query results into, *25*
types of, *2*
collection constructor, *16*
collection method, *32*
as subprogram parameter, *32*
invocation syntax, *31*
null collection and, *32*
COLLECTION_IS_NULL exception, *10*
column alias
in cursor FOR LOOP, *25*
in explicit cursor, *15*
COLUMNS pseudo-operator, *57*
comment, *12*
nested, *13*
PL/SQL Wrapper utility and, *A-2*
syntax diagram, *39*
COMMIT statement, *44*
FOR UPDATE cursor and, *52*
COMMIT statement *(continued)*
in autonomous transaction, *57*
comparison operator, *36*
cursor variable and, *51*
compatible data type
for collection variables, *24*
for scalar variables, *24*
compilation
conditional, *54*
for native execution, *70*
interpreted, *72*
compilation parameter, *11*
displaying value of, *56*
predefined inquiry directive for, *56*
compile clause, *40*
compile_clause
in ALTER FUNCTION statement, *2*
compile_clause syntax diagram, *40*
compile-time warning, *2*
compiler directive
See pragma
composite data type, *1*
composite variable, *1*
compound trigger, *10*
computation-intensive code, *9*
concatenation operator (||), *28*
concurrent transactions, *58*
condition, SQL multiset, *31*
conditional compilation, *54*
conditional compilation directive, *54*
error, *56*
inquiry, *56*
restrictions on, *62*
selection, *55*
conditional predicate, *5*
conditional selection statement, *1*
conditional trigger, *1*
constant
declaring, *16*
associative array, *7*
record, *51*
syntax diagram, *42*
initial value of, *17*
predefined, *2*
static, *52*
in DBMS_DB_VERSION package, *60*
constrained subtype, *32*
in performance-critical code, *10*
subprogram parameter and, *11*
constraint
cursor parameter and, *84*
NOT NULL
See NOT NULL constraint, *15*
trigger compared to, *2*
constructor
See collection constructor

Copyright © 1996, 2025, Oracle and/or its affiliates.

context of transaction, *55*
CONTINUE statement
  syntax diagram, *44*
CONTINUE WHEN statement
  syntax diagram, *44*
control statement, *1*
control token, *55*
correlated subquery, *28*
correlation name, *28*
  with LONG or LONG RAW column, *41*
    See also pseudorecord
COUNT collection method, *43*
COVERAGE pragma, *46*
CREATE FUNCTION statement, *24*
CREATE LIBRARY statement, *30*
CREATE PACKAGE statement, *34*
CREATE TRIGGER statement, *47*
CREATE TYPE BODY statement, *79*
CREATE TYPE statement, *67*
CREATE_WRAPPED procedure, *A-8*
crossedition trigger, *1*
CURRENT OF clause, *51*
  FOR UPDATE cursor and, *51*
  ROWID pseudocolumn instead of, *52*
CURRVAL pseudocolumn, *3*
cursor, *5*
  explicit
    See explicit cursor, *9*
  FOR UPDATE, *51*
    after COMMIT or ROLLBACK, *52*
  implicit
    See implicit cursor, *6*
  in SERIALLY_REUSABLE package, *9*
  named, *9*
    pipelined table function and, *47*
    See also explicit cursor *and* cursor variable, *9*
  nested, *42*
cursor attribute
  for cursor variable, *38*
  for explicit cursor, *20*
    %FOUND, *21*
    %ISOPEN, *20*
    %NOTFOUND, *22*
    %ROWCOUNT, *23*
  for implicit cursor, *6*
    DBMS_SQL package and, *11*
    native dynamic SQL and, *2*
    SQL%BULK_EXCEPTIONS, *20*
    SQL%BULK_ROWCOUNT, *23*
    SQL%FOUND, *7*
    SQL%ISOPEN, *7*
    SQL%NOTFOUND, *8*
    SQL%ROWCOUNT, *8*
  where you can use, *5*
CURSOR expression, *42*
  passing to pipelined table function, *48*
cursor FOR LOOP statement, *10*
  query result set processing with, *25*
  recursive invocation in, *35*
  syntax diagram, *49*
cursor number
  converting cursor variable to, *17*
  converting to cursor variable, *15*
  DBMS_SQL.GET_NEXT_RESULT procedure and, *14*
  DBMS_SQL.RETURN_RESULT procedure and, *12*
cursor parameter, *16*
cursor specification, *84*
cursor variable, *30*, *31*
  converting cursor number to, *15*
  converting to cursor number, *17*
  DBMS_SQL.GET_NEXT_RESULT procedure and, *14*
  DBMS_SQL.RETURN_RESULT procedure and, *12*
  declaration syntax diagram, *51*
CURSOR_ALREADY_OPEN exception, *10*
cursor_control, *21*

D

data abstraction, *7*
data definition language statement
  See DDL statement
Data Pump Import and triggers, *47*
data type, *1*
  collection
    See collection, *1*
  compatible
    for collection variables, *24*
    for scalar variables, *24*
  composite, *1*
  JSON, *5*
  object
    See Abstract Data Type (ADT), *8*
  of expression, *27*
  predefined, *E-1*
  RECORD
    See record, *1*
  scalar, *1*
  SQL, *1*
  user-defined
    See Abstract Data Type (ADT), *8*
  what it determines, *1*
    See also subtype
data type conversion, *1*
  implicit
    See implicit data type conversion, *10*
  SQL injection and, *22*

Copyright © 1996, 2025, Oracle and/or its affiliates.

data type family, *1*
overloaded subprogram and, *29*
predefined data types grouped by, *E-1*
subtypes with base types in same, *33*
Data-bound collation, *55*
database character set, *1*
database links
DR units, *54*
DATABASE trigger, *35*
datatype
in CREATE TYPE statement, *67*
Datatype, *54*
DATE data type family, *E-1*
DBMS_ASSERT package, *25*
DBMS_DB_VERSION package, *60*
DBMS_DDL package, *A-8*
DBMS_PARALLEL_EXECUTE package, *67*
DBMS_PREPROCESSOR package, *62*
DBMS_SQL package, *11*
switching to native dynamic SQL from, *11*
DBMS_SQL.GET_NEXT_RESULT procedure, *14*
DBMS_SQL.RETURN_RESULT procedure, *12*
DBMS_SQL.TO_NUMBER function, *17*
DBMS_SQL.TO_REFCURSOR function, *15*
DBMS_STANDARD package, *19*
DBMS_WARNING package, *3*
dbmsupgin.sql script, *72*
dbmsupgnv.sql script, *72*
DDL statement, *58*
dynamic SQL for, *1*
in trigger, *58*
subprogram side effects and, *51*
deadlock
autonomous transaction and, *58*
implicit rollback and, *49*
declaration, *15*
exception raised in, *22*
DEFAULT COLLATION clause, *55*
in CREATE FUNCTION statement, *24*
in CREATE PACKAGE statement, *34*
in CREATE PROCEDURE statement, *42*
in CREATE TRIGGER statement, *47*
in CREATE TYPE statement, *67*
default value, *22*
of cursor parameter, *17*
of subprogram parameter, *22*
See also initial value
DEFINE
binding category, *11*
definer's rights clause, *118*
definer's rights unit
See DR unit
DELETE collection method, *33*
COUNT method and, *43*
EXISTS method and, *39*
EXTEND method and, *37*
DELETE collection method *(continued)*
FIRST method and, *39*
LAST method and, *39*
NEXT method and, *46*
PRIOR method and, *46*
TRIM method and, *36*
DELETE statement, *57*
BEFORE statement trigger and, *39*
PL/SQL extension to, *57*
See also DML statement
DELETING conditional predicate, *5*
delimiter, *4*
dense collection, *2*
DEPRECATE pragma, *57*
Descriptive Intermediate Attributed Notation for Ada (DIANA), *C-1*
DETERMINISTIC
in CREATE FUNCTION statement, *24*
DETERMINISTIC clause, *67*
DETERMINISTIC option, *108*
for pipelined table function, *43*
DIAGNOSTIC_DEST initialization parameter, *1*
direct-key partitioning, *24*, *79*
directive, *54*
compiler
See pragma, *11*
error, *56*
inquiry, *56*
selection, *55*
See also conditional compilation directive
DML statement, *57*, *119*, *189*
avoiding inner capture in, *B-8*
in FORALL statement, *12*
inside pipelined table function, *43*
on pipelined table function result, *51*
PL/SQL syntax of, *1*
repeating efficiently, *12*
DML trigger, *4*
dot notation, *19*
for collection method, *32*
for identifier in named PL/SQL unit, *19*
for pseudocolumn, *3*
for record field, *1*
name resolution and, *B-1*
double quotation mark ("), *1*
DR unit, *52*
call stack and, *52*
database links, *54*
dynamic SQL and, *52*
INHERIT REMOTE PRIVILEGES privilege, *54*
name resolution and, *52*
privilege checking and, *52*
SCHEMA trigger and, *34*
static SQL and, *52*
See also AUTHID property
DROP FUNCTION statement, *83*

Copyright © 1996, 2025, Oracle and/or its affiliates.

DROP LIBRARY statement, *85*
DROP PACKAGE statement, *86*
DROP PROCEDURE statement, *88*
DROP TRIGGER statement, *89*
DROP TYPE BODY statement, *92*
DUP_VAL_ON_INDEX exception, *10*
dynamic SQL, *1*
  AUTHID property and, *52*
  native, *2*
    switching to DBMS_SQL package from, *11*
  placeholder for bind variable in
    EXECUTE IMMEDIATE statement and, *2*
    repeated, *10*
  tuning, *4*

E

editioned, *12*
editioned Abstract Data Type (ADT), *12*
element of collection, *1*
element specification
  in CREATE TYPE statement, *67*
  syntax diagram, *68*
embedded SQL
  See static SQL
empty collection, *2*
  creating with constructor, *16*
error directive, *56*
error handling, *1*
error-reporting function
  SQLCODE, *179*
  SQLERRM, *180*
    SQL%BULK_EXCEPTIONS and, *20*
escape character, *39*
escaped identifier, *B-6*
evaluation order, *28*
events publication, *48*
evolution of type, *12*
exception, *1*
  handling, *5*
    in FORALL statement, *18*
    in trigger, *37*
    See also exception handler, *5*
  internally defined
    See internally defined exception, *9*
  predefined
    See predefined exception, *10*
  raised in cursor FOR LOOP statement, *25*
  raised in declaration, *22*
  raised in exception handler, *23*
  raising explicitly, *15*
  reraising, *17*
  unhandled, *27*
    in FORALL statement, *18*
exception *(continued)*
  user-defined
    See user-defined exception, *13*
exception handler, *5*
  continuing execution after, *28*
  exception raised in, *23*
  for NO_DATA_NEEDED, *51*
  GOTO statement and, *110*
  locator variables for, *7*
  retrieving error code and message in, *27*
  retrying transaction after, *30*
  syntax diagram, *77*
EXCEPTION_INIT pragma, *74*
  for giving error code to user-defined exception, *18*
  for giving name to internally defined exception, *9*
EXECUTE IMMEDIATE statement, *2*
  syntax diagram, *79*
EXISTS collection method, *39*
EXIT statement
  syntax diagram, *82*
EXIT WHEN statement
  syntax diagram, *82*
exiting a loop, *9*
explicit cursor, *9*
  declaration syntax diagram, *84*
  in package
    declaring, *12*
    opening and closing, *10*
  query result processing with
    in FOR LOOP statement, *25*
    with OPEN, FETCH, and CLOSE statements, *28*
explicit format model, *26*
expression, *27*
  CURSOR, *42*
    passing to pipelined table function, *48*
  data type of, *27*
  in explicit cursor, *15*
  SQL function in PL/SQL, *47*
  static, *48*
  syntax diagram, *88*
EXTEND collection method, *37*
external subprogram, *55*
  call specification, *24*

F

FETCH FIRST clause, *32*
FETCH statement
  across COMMIT, *52*
  record variable and, *66*
  syntax diagram, *98*
  that returns no row, *11*
  with BULK COLLECT clause, *33*

Copyright © 1996, 2025, Oracle and/or its affiliates.

FETCH statement *(continued)*
with cursor variable, *33*
with explicit cursor, *11*
field of record, *1*
FIRST collection method, *39*
FOR LOOP index, *12*
FOR LOOP iterand, *12*
FOR LOOP statement, *10*
FOR LOOP statement
bounds of, *100*
FORALL statement and, *12*
STEP clause and, *10*
syntax diagram, *100*
See also cursor FOR LOOP statement
FOR UPDATE cursor, *51*
after COMMIT or ROLLBACK, *52*
FORALL statement, *12*
associative array in, *103*
bulk binding and, *11*
BULK COLLECT clause and, *39*
for sparse collection, *15*
SQL%BULK_EXCEPTIONS and, *22*
handling exception raised in
after FORALL completes, *20*
immediately, *19*
number of rows affected by, *23*
syntax diagram, *103*
unhandled exception in, *18*
format model, *26*
forward declaration of subprogram, *8*
function, *1*
aggregate
See aggregate function, *48*
built-in
See SQL function, *11*
declaration syntax diagram, *108*
error-reporting
SQLCODE, *179*
SQLERRM, *20*
invoking, *2*
in SQL statement, *51*
options for, *5*
SQL
See SQL function, *11*
structure of, *5*
table
See table function, *42*
See also subprogram
function result cache, *37*
function specification, *108*

G

generated column
See virtual column
GET_NEXT_RESULT procedure, *14*
global identifier, *20*
GOTO statement, *24*
restrictions on, *110*
syntax diagram, *110*
granting roles to PL/SQL units, *54*

H

hardware arithmetic, *9*
hash table, *2*
hiding PL/SQL source text
See wrapping PL/SQL source text
host variable
bulk-binding, *41*
cursor variable as, *41*
packages and, *2*

I

identifier, *5*, *19*
ambiguous reference to, *B-1*
escaped, *B-6*
global, *20*
in static SQL, *1*
local, *20*
reference to, *19*
scope of, *20*
user-defined, *6*
collecting data about, *68*
visibility of, *20*
See also name
IDL, *C-1*
IF statement, *1*
IF THEN ELSE form, *3*
IF THEN ELSIF form, *4*
nested IF THEN ELSE statement and, *4*
simple CASE statement and, *4*
IF THEN form, *1*
nested, *3*
syntax diagram, *113*
immutable iterand, *14*
imp and triggers, *47*
implicit cursor, *6*
CURSOR expression with, *42*
declaration syntax, *115*
dynamic SQL and, *11*
query result processing with
with cursor FOR LOOP statement, *25*
with SELECT INTO statement, *25*
implicit data type conversion
minimizing, *10*
of subprogram parameter, *13*
causing overload error, *32*
of subtypes
constrained, *32*
unconstrained, *31*

Copyright © 1996, 2025, Oracle and/or its affiliates.

implicit data type conversion *(continued)*
of subtypes *(continued)*
with base types in same family, *33*
implicit ROLLBACK statement, *49*
implicitly returning query results, *12*
Import and triggers, *47*
IN operator, *41*
IN OUT parameter mode, *14*
IN parameter mode, *14*
in-bind, *11*
independent transaction
See autonomous transaction
index collection, *15*
representing subset with, *15*
index iterator choice, *18*
index of collection, *1*
index-by table
See associative array
indices_of_control, *18*
infinite loop, *10*
INFORMATIONAL compile-time warning, *2*
INHERIT ANY PRIVILEGES privilege, *52*
INHERIT PRIVILEGES privilege, *52*
INHERIT REMOTE PRIVILEGES privilege, *54*
initial value, *22*
%TYPE attribute and, *18*
NOT NULL constraint and, *15*
of constant, *17*
of variable
nested table, *13*
record, *51*
scalar, *17*
varray, *10*
See also default value
initialization parameter, *11*
INLINE pragma, *2*
syntax diagram, *117*
inner capture, *B-7*
avoiding, *B-8*
input, *6*
inquiry directive, *56*
INSERT statement, *119*
inserting record with, *69*
restrictions on, *71*
PL/SQL extension to, *119*
See also DML statement
INSERTING conditional predicate, *5*
INSTEAD OF trigger, *1*
for CREATE statement, *35*
on DML statement, *5*
compound, *10*
for pipelined table function result, *51*
on nested table column, *5*
Interface Definition Language (IDL), *C-1*
internally defined exception, *9*
giving name to, *9*
internally defined exception *(continued)*
raising explicitly, *16*
interpreted compilation, *72*
INVALID_CURSOR exception, *10*
INVALID_NUMBER exception, *10*
invisible column, *60*
invoker's rights clause, *118*
invoker's rights unit
See IR unit
IR unit, *52*
call stack and, *52*
dynamic SQL and, *52*
granting roles to, *54*
name resolution and, *52*
privilege checking and, *52*
static SQL and, *52*, *54*
template objects for, *54*
See also AUTHID property
IS [NOT] NULL operator, *36*
isolation level of transaction, *55*
iterand, *121*
iterand declaration, *121*
iterand mutability property, *14*
iteration control, *121*
iterator, *121*
FOR LOOP statement
bounds of, *121*
PAIRS OF, *121*
INDICES OF, *121*
syntax diagram, *121*
VALUES OF, *121*

J

Java class method invocation, *55*
Java method declaration, *24*
JavaScript declaration, *24*
JavaScript function, invoking, *55*
JSON data type family, *E-1*

K

key-value pair
See associative array
keywords, *6*
list of, *D-1*

L

LAST collection method, *39*
LEVEL pseudocolumn, *3*
lexical unit, *4*
library
creating, *30*
dropping, *85*
explicitly recompiling, *4*

Copyright © 1996, 2025, Oracle and/or its affiliates.

library arithmetic, *9*
LIKE operator, *39*
LIMIT clause, *36*
LIMIT collection method, *45*
line-continuation character, *10*
literal, *10*
local identifier, *20*
locator variable, *7*
lock mode, *51*
LOCK TABLE statement, *51*
locking
  overriding default, *50*
  result set row, *51*
  table, *51*
logical operator, *31*
logical value, *3*
LOGIN_DENIED exception, *10*
LONG data type, *26*
  in trigger, *41*
LONG RAW data type, *26*
  in trigger, *41*
LOOP statement
  exiting, *9*
  kinds of, *9*
  labeled, *9*
  optimizing, *8*
LOOP UNTIL structure, *23*

M

MALFORMED_WRAP_INPUT exception, *A-8*
manageability, *3*
MapReduce workloads, *24*, *79*
materialized view, trigger and, *47*
membership test, *41*
Method 4, *11*
method, collection
  See collection method
mixed parameter notation, *25*
mode
  lock, *51*
  subprogram parameter, *14*
multibyte character set
  as database character set, *1*
  variables for values from, *24*
multidimensional collection, *27*
multiline comment, *13*
multiple data transformations, *41*
multiset condition, *31*
mutable iterand, *14*
mutating table, *41*
mutating-table error
  for function, *51*
  for trigger, *41*

N

name, *19*
  qualified
    See dot notation, *19*
  qualified remote, *19*
  remote, *19*
  simple, *19*
    See also identifier
name resolution, *B-1*
  AUTHID property and, *52*
  in static SQL, *B-6*
  PL/SQL and SQL differences, *B-5*
named choice list, *18*
named cursor, *9*
  pipelined table function and, *47*
    See also explicit cursor and cursor variable
named parameter notation, *25*
national character set, *3*
native dynamic SQL, *2*
  switching to DBMS_SQL package from, *11*
native execution, compilation for, *70*
NATURAL subtype, *28*
NATURALN subtype, *28*
nested comment, *13*
nested cursor, *42*
nested IF statement, *3*
  IF THEN ELSIF form and, *4*
nested record
  assignment example, *63*
  declaration example, *52*
nested subprogram, *2*
  declaration and definition of, *2*
  forward declaration for, *8*
nested table, *13*
  assigning null value to, *24*
  assigning set operation result to, *25*
  characteristics of, *2*
  column in view, trigger on, *5*
  comparing to NULL, *29*
  comparing two, *30*
  correlation names and, *28*
  COUNT method for, *44*
  FIRST and LAST methods for, *42*
  returned by function, *42*
  SQL multiset conditions and, *31*
    See also collection
nested transaction, *53*
NEW correlation name, *28*
  with LONG or LONG RAW column, *41*
NEXT collection method, *46*
NEXTVAL pseudocolumn, *3*
NLS parameters
  associative array and, *8*
  character comparison and, *38*
  SQL injection and, *22*

Copyright © 1996, 2025, Oracle and/or its affiliates.

NO_DATA_FOUND exception, *10*
NO_DATA_NEEDED exception, *51*
  SQLCODE for, *10*
no-op (no operation) statement, *24*
NOCOPY hint, *105*
  subprogram parameter aliasing and, *20*
  tuning subprogram invocation with, *7*
nonpadded comparison semantics, *25*
IS [NOT] NULL operator
  collections and, *29*
NOT NULL constraint, *15*
  %TYPE attribute and, *18*
  EXTEND method and, *37*
NOT operator, *31*
NOT_LOGGED_ON exception, *10*
null collection, *2*
  assigning to collection variable, *24*
  collection method and, *32*
NULL statement
  syntax diagram, *130*
  uses for, *24*
null string, *10*
NULL value
  assigning to record variable, *68*
  comparing to collection
    associative array, *29*
    nested table, *29*
    varray, *29*
  comparison operator and, *36*
  concatenation operator and, *28*
  for $$PLSQL_UNIT inquiry directive, *56*
  for $$PLSQL_UNIT_OWNER inquiry directive, *56*
  for collection variable, *24*
  for subprogram parameter, *22*
  for unresolvable inquiry directive, *59*
  in control statement, *31*
  IN operator and, *41*
  in set, *41*
  in USING clause, *2*
  simple CASE expression and, *43*
  simple CASE statement and, *6*
NUMBER data type family
  inefficiency of, *9*
  members of, *E-1*

O

obfuscating PL/SQL source text
  See wrapping PL/SQL source text
object type
  See Abstract Data Type (ADT)
OBJECT_VALUE pseudocolumn, *32*
OCI
  associative array and, *10*
  cursor variable and, *41*
of RETURNING INTO clause, *37*
OLD correlation name, *28*
OPEN FOR statement, *132*
  recursive invocation and, *35*
OPEN statement, *130*
  recursive invocation and, *35*
operation, *28*
operator
  comparison, *36*
    cursor variable and, *51*
  logical, *31*
  relational, *37*
    collection and, *29*
operator precedence, *28*
optimizer
  PL/SQL, *1*
  SQL, *47*
OR operator, *31*
ORA-*n* error
  See internally defined exception
Oracle Call Interface (OCI)
  associative array and, *10*
  cursor variable and, *41*
Oracle RAC environment, result caches in, *48*
ordinary user-defined identifier, *7*
Original Import and triggers, *47*
others choice, *18*
OUT parameter mode, *14*
out-bind, *11*
outer capture, *B-7*
output, *6*
overloaded subprogram, *29*
  INLINE pragma and, *2*

P

package, *1*
  body of
    See package body, *5*
  DBMS_STANDARD, *19*
  explicitly recompiling, *6*
  features of, *2*
  granting roles to, *54*
  guidelines for writing, *12*
  initialization of, *7*
  of static constants, *52*
  private items in, *5*
  product-specific, *1*
  public items in
    See public package item, *3*
  reasons to use, *2*
  SERIALLY_REUSABLE, *8*
  specification of
    See package specification, *3*
  STANDARD
    See STANDARD package, *18*

Copyright © 1996, 2025, Oracle and/or its affiliates.

package *(continued)*
state of, *7*
supplied by Oracle, *1*
wrapping, *A-1*
guideline for, *A-2*
package body, *1*
creating, *38*
dropping, *86*
initialization part of, *5*
assigning initial values in, *12*
replacing, *38*
package specification, *1*, *3*
creating, *34*
cursor variable in, *51*
dropping, *86*
replacing, *34*
See also public package item
package subprogram, *2*
pairs_of_control, *18*
parallel DML
bulk binding and, *11*
for large table, *67*
PARALLEL_ENABLE clause, *134*
in CREATE FUNCTION statement, *24*
PARALLEL_ENABLE option, *108*
for pipelined table function, *43*
for table function, *42*
parameter
compilation
See compilation parameter, *11*
explicit cursor, *16*
initialization, *11*
subprogram
See subprogram parameter, *9*
parameter mode, *14*
PARENT correlation name, *28*
with LONG or LONG RAW column, *41*
parentheses
nested, *28*
to control evaluation order, *28*
to improve readability, *28*
pattern matching, *39*
percent sign (%) wildcard character, *39*
PERFORMANCE compile-time warning, *2*
PIPE ROW statement, *43*
in autonomous routine, *58*
PIPELINED Function
syntax diagram, *138*
PIPELINED option, *42*
where to specify, *43*
pipelined table function, *41*, *42*
as aggregate function, *48*
in autonomous transaction, *137*
See also table function
PL/Scope tool, *68*
PL/SQL architecture, *10*
PL/SQL block
See block
PL/SQL engine, *10*
PL/SQL function result cache, *37*
PL/SQL language
advantages of, *1*
high performance of, *2*
high productivity with, *2*
lexical units of, *4*
limits of, *C-1*
main features of, *3*
manageability and, *3*
portability of, *2*
program limits of, *C-1*
scalability of, *3*
SQL integration in, *1*
syntax and semantics, *1*
PL/SQL optimizer, *1*
PL/SQL table
See associative array
PL/SQL unit, *11*
stored
See stored PL/SQL unit, *11*
PL/SQL Wrapper utility, *A-2*
placeholder for bind variable
in conditional compilation directive, *62*
in dynamic SQL
EXECUTE IMMEDIATE statement and, *2*
repeated, *10*
in static SQL, *1*
OPEN FOR statement and, *32*
in trigger body, *28*
PLS_INTEGER data type, *27*
tuning code and, *9*
PLS_INTEGER static expression, *51*
PLSQL_CCFLAGS compilation parameter, *58*
PLSQL_IMPLICIT_CONVERSION_BOOL
initialization parameter, *3*
PLSQL_OPTIMIZE_LEVEL compilation
parameter, *1*
PLSQL_WARNINGS compilation parameter
displaying value of
with ALL_PLSQL_OBJECT_SETTINGS
view, *2*
with DBMS_WARNING subprogram, *3*
setting value of
with ALTER statements, *2*
with PLSQL_WARNINGS subprogram, *3*
polymorphic table function, *53*
compilation and execution, *57*
definition, *54*
implementation, *54*
invocation, *55*
COLUMNS pseudo-operator, *57*
optimization, *57*
portability, *2*

Copyright © 1996, 2025, Oracle and/or its affiliates.

positional choice list, *18*
positional parameter notation, *25*
POSITIVE subtype, *28*
POSITIVEN subtype, *28*
post-processed source text, *62*
pragma, *11*
  AUTONOMOUS_TRANSACTION, *12*
    for pipelined table function, *43*
  COVERAGE, *46*
  DEPRECATE, *57*
  EXCEPTION_INIT, *74*
  INLINE, *2*
    syntax diagram, *117*
  RESTRICT_REFERENCES, *152*
  SERIALLY_REUSABLE, *166*
  SUPPRESSES_WARNING_6009, *182*
  UDF, *189*
precedence, operator, *28*
predefined constant, *2*
predefined data type, *E-1*
predefined exception, *10*
  raising explicitly, *16*
  redeclared, *13*
predefined inquiry directive, *56*
predefined subtype, *E-1*
preprocessor control token, *55*
PRIOR collection method, *46*
privilege checking and AUTHID property, *52*
procedure, *1*
  declaration syntax, *141*
  invoking, *2*
  structure of, *5*
    See also subprogram
procedure specification, *141*
product-specific package, *1*
profiling and tracing programs, *68*
program limits, *C-1*
PROGRAM_ERROR exception, *10*
pseudocolumn, *3*
  OBJECT_VALUE, *32*
pseudoinstruction
  See pragma
pseudorecord, *28*
    See also correlation name
public package item, *3*
  appropriate, *3*
  collection type as, *48*
  cursor variable as, *51*
  declaring, *3*
  RECORD type as, *52*
  referencing, *3*
  remote variable, *3*
  scope of, *3*
  visibility of, *3*
publishing events, *48*
purity rules for subprograms, *51*

Q

qualified expression, *18*
  syntax diagram, *143*
qualified name
  See dot notation
qualified remote name, *19*
query, *1*
  implicitly returning results of, *12*
  invoking function in, *5*
  processing result set of, *24*
    multiple-row dynamic query, *8*
    See also SELECT INTO statement
quotation mark, single or double, *1*
quoted user-defined identifier, *8*

R

RAISE statement, *15*
  syntax diagram, *148*
RAISE_APPLICATION_ERROR procedure, *18*
raising exception explicitly, *15*
range test, *40*
read-only transaction, *49*
read-write transaction, *49*
recompiling stored PL/SQL unit, *1*
record, *1*
  as public package item, *52*
  assigning value to, *61*
  comparing one to another, *69*
  creating, *50*
    syntax diagram, *149*
  declaring constant, *51*
  nested
    See nested record, *52*
  representing row, *56*
  types of, *52*
record type variables, *62*
recursive subprogram, *35*
  result-cached, *43*
recursive trigger, *39*
REF CURSOR
  See cursor variable
REF CURSOR type, *31*
relational operator, *37*
  collection and, *29*
RELEASE constant, *60*
remote exception handling
  subprograms and, *19*
  triggers and, *37*
remote name, *19*
remote public package variable, *3*
remote subprogram
  exceptions in, *19*
  invoked by trigger, *36*
  with composite parameter, *1*

Copyright © 1996, 2025, Oracle and/or its affiliates.

REPEAT UNTIL structure, *23*
replacing stored PL/SQL unit, *1*
reraising exception, *17*
reserved preprocessor control token, *55*
reserved words
  information about, *6*
  list of, *D-1*
RESETTABLE clause, *151*
RESTRICT_REFERENCES pragma, *152*
result cache, *37*
RESULT_CACHE clause, *38*, *154*
RESULT_CACHE option for function, *108*, *24*
RESULT_CACHE_EXECUTION_THRESHOLD, *37*
RESULT_CACHE_MAX_RESULT, *37*
RESULT_CACHE_MAX_SIZE, *37*
RESULT_CACHE_MAX_TEMP_SIZE, *37*
RETURN clause of function, *5*
RETURN INTO clause
  See RETURNING INTO clause
RETURN statement, *6*
RETURN_RESULT procedure, *12*
RETURNING INTO clause, *157*
  BULK COLLECT clause of, *37*
    FORALL statement and, *39*
returning query results implicitly, *12*
REUSE SETTINGS clause, *11*
ROLLBACK statement, *46*
  FOR UPDATE cursor and, *52*
  implicit, *49*
  in autonomous transaction, *57*
  transparent, *39*
row-level trigger, *4*
rowid, *26*
ROWID data type, *26*
ROWID pseudocolumn, *3*
  instead of CURRENT OF clause, *52*
ROWNUM pseudocolumn
  bulk SELECT operation and, *32*
  single-row result set and, *25*
ROWTYPE_MISMATCH exception
  error code for, *10*
  example of, *10*
runtime error
  See exception

S

same-scope capture, *B-7*
SAMPLE clause, *32*
SAVEPOINT statement, *47*
  in autonomous transaction, *58*
scalability
  SERIALLY_REUSABLE packages and, *8*
  subprograms and, *3*
scalar data type, *1*
scalar variable
  assigning value to, *24*
  declaration, *16*
    syntax diagram, *162*
  initial value of, *17*
schema object
  See stored PL/SQL unit
SCHEMA trigger, *34*
scope of identifier, *20*
searched CASE expression, *45*
searched CASE statement, *8*
  syntax diagram, *27*
security mechanism
  against SQL injection, *18*
  PL/SQL source text wrapping
    benefit of, *A-1*
    limitations of, *A-2*
  trigger as, *2*
SELECT FOR UPDATE statement, *51*
SELECT INTO statement, *1*
  assigning values with
    to record variable, *66*
    to scalar variables, *25*
  avoiding inner capture in, *B-8*
  query result set processing with, *25*
  SQL%NOTFOUND attribute and, *8*
  SQL%ROWCOUNT attribute and, *8*
  syntax diagram, *163*
  with BULK COLLECT clause, *25*
    See also query
selection directive, *55*
selector
  in simple CASE expression, *43*
  in simple CASE statement, *6*
SELF_IS_NULL exception, *10*
sequence, *3*
sequence iterator choice, *18*
sequential control statement, *24*
SERIALLY_REUSABLE package, *8*
SERIALLY_REUSABLE pragma, *166*
session cursor, *5*
SESSION_EXIT_ON_PACKAGE_STATE_ERROR initialization parameter, *7*
set data structure, *2*
set membership test, *41*
SET TRANSACTION statement, *49*
SEVERE compile-time warning, *2*
SHARD_ENABLE clause, *166*
  in CREATE FUNCTION statement, *24*
SHARING clause
  in CREATE FUNCTION statement, *24*
  in CREATE LIBRARY statement, *30*
  in CREATE PACKAGE statement, *34*
  in CREATE PROCEDURE statement, *42*
  in CREATE TRIGGER statement, *47*
  in CREATE TYPE statement, *67*

Copyright © 1996, 2025, Oracle and/or its affiliates.

SHARING clause *(continued)*
sharing_clause syntax diagram, *168*
short-circuit evaluation
how it works, *35*
tuning code and, *11*
side effects of subprogram, *37*
SIGNTYPE subtype, *28*
simple CASE expression, *43*
simple CASE statement, *6*
IF THEN ELSIF statement and, *4*
syntax diagram, *27*
simple DML trigger, *4*
simple name, *19*
SIMPLE_DOUBLE subtype, *3*
tuning code and, *9*
SIMPLE_FLOAT subtype, *3*
tuning code and, *9*
SIMPLE_INTEGER subtype, *29*
tuning code and, *9*
single quotation mark ('), *1*
single-line comment, *13*
sort ordering, *55*
sparse collection, *2*
FORALL statement for, *15*
SQL%BULK_EXCEPTIONS and, *22*
traversing, *46*
specification
cursor, *84*
function, *108*
package
See package specification, *1*
procedure, *141*
SQL
bulk, *11*
in compound DML trigger, *11*
dynamic
See dynamic SQL, *1*
static
See static SQL, *1*
SQL cursor
See implicit cursor
SQL data type, *1*
SQL function, *11*
in PL/SQL expression, *47*
tuning and, *11*
SQL injection, *18*
SQL integration in PL/SQL, *1*
SQL multiset condition, *31*
SQL MULTISET operator, *25*
SQL optimizer, *47*
SQL statement, *4*
for stored PL/SQL unit, *1*
in trigger, *1*
invoking collection method in, *32*
invoking PL/SQL function in, *51*
tuning, *5*
SQL statement *(continued)*
See also anonymous block
SQL_MACRO clause, *170*
in CREATE FUNCTION statement, *24*
SQL*Loader and triggers, *47*
SQL%BULK_EXCEPTIONS cursor attribute, *20*
SQL%BULK_ROWCOUNT cursor attribute, *23*
SQL%FOUND cursor attribute, *7*
SQL%NOTFOUND cursor attribute, *8*
SQL%ROWCOUNT cursor attribute, *8*
SQLCODE function, *179*
SQLERRM function, *180*
SQL%BULK_EXCEPTIONS and, *20*
standalone subprogram, *2*
function
creating, *24*
dropping, *83*
explicitly recompiling, *2*
replacing, *24*
procedure
creating, *42*
dropping, *88*
explicitly recompiling, *8*
replacing, *42*
STANDARD package
data type defined in
See predefined data type, *E-1*
exception defined in
See predefined exception, *10*
how it defines PL/SQL environment, *18*
listing identifiers defined in, *6*
referencing item defined in, *19*
statement injection, *20*
statement modification, *19*
statement-level trigger, *4*
static constant, *52*
in DBMS_DB_VERSION package, *60*
static expression, *48*
static SQL, *1*
AUTHID property and, *52*
name resolution in, *B-6*
PL/SQL identifier in, *1*
placeholder for bind variable in, *1*
OPEN FOR statement and, *32*
STORAGE_ERROR exception, *10*
recursive invocation and, *35*
store table, *16*
stored PL/SQL unit, *11*, *1*
creating, *1*
recompiling, *1*
replacing, *1*
wrapping, *A-1*
stored subprogram, *2*
unhandled exception in, *27*
wrapping, *A-1*

Copyright © 1996, 2025, Oracle and/or its affiliates.

string, *10*
null, *10*
zero-length, *10*
See also character literal
STRING subtype, *24*
strong REF CURSOR type
creating, *31*
FETCH statement and, *33*
subprogram, *1*
inlining, *2*
invoked by trigger, *36*
remote
See remote subprogram, *1*
unhandled exception in, *27*
subprogram invocation
optimization of, *2*
resolution of, *27*
syntax of, *2*
tuning, *7*
subprogram parameter, *9*
collection as, *32*
composite variable as, *1*
CURSOR expression as actual, *42*
cursor variable as, *38*
optional, *22*
query result as, *38*
required, *22*
subprogram property, *3*
subquery
correlated, *28*
result set processing with, *28*
SUBSCRIPT_BEYOND_COUNT exception, *10*
SUBSCRIPT_OUTSIDE_LIMIT exception, *10*
subtype, *1*
constrained, *32*
subprogram parameter and, *11*
of BINARY_DOUBLE data type, *3*
of BINARY_FLOAT data type, *3*
of PLS_INTEGER data type, *28*
predefined, *E-1*
unconstrained, *31*
user-defined, *30*
See also data type
SUPPRESSES_WARNING_6009 pragma, *182*
synonym, *19*
SYS_INVALID_ROWID exception, *10*
SYS_REFCURSOR type, *31*
system trigger, *34*

T

table
hash, *2*
index-by
See associative array, *4*
mutating, *41*
table *(continued)*
nested, *13*
characteristics of, *2*
parallel DML for large, *67*
PL/SQL
See associative array, *4*
store, *16*
unordered, *2*
updating large in parallel, *67*
table alias
for avoiding inner capture, *B-8*
for row expression, *B-10*
for table element attribute or method, *B-9*
table function, *41*, *42*
pipelined
See pipelined table function, *41*
weak cursor variable argument to, *31*
TABLE operator, *37*
TCL statement, *1*
in subprogram invoked by trigger, *36*
in trigger, *58*
template object, *54*
TIMEOUT_ON_RESOURCE exception, *10*
timing point
of DML trigger
compound, *10*
simple, *4*
of system trigger, *34*
trigger firing order and, *45*
TO_NUMBER function, *17*
TO_REFCURSOR function, *15*
TOO_MANY_ROWS exception, *10*
trace file, *1*
tracing and profiling programs, *68*
transaction
autonomous, *53*
pipelined table function in, *137*
context of, *55*
ending
with COMMIT statement, *44*
with ROLLBACK statement, *46*
isolation level of, *55*
nested, *53*
read-only, *49*
read-write, *49*
retrying after handling exception, *30*
SQL%ROWCOUNT cursor attribute and, *8*
visibility of, *55*
Transaction Control Language
See TCL statement
TRANSACTIONS initialization parameter, *58*
tri-state logic, *31*
trigger, *1*
as security mechanism, *2*
AUTHID property and, *52*
autonomous, *58*

Copyright © 1996, 2025, Oracle and/or its affiliates.

trigger *(continued)*
cascading, *45*
DDL statement in, *58*
hiding implementation details of, *A-2*
materialized view and, *47*
recursive, *39*
TCL statement in, *58*
TRIM collection method, *36*
tuning PL/SQL code, *1*
type
See data type
type-compatible data type
for collection variables, *24*
for scalar variables, *24*
typemark, *18*

U

UDF pragma, *189*
unconstrained subtype, *31*
underscore (_) wildcard character, *39*
unhandled exception, *27*
in FORALL statement, *18*
unordered table, *2*
UPDATE statement, *189*
BEFORE statement trigger and, *39*
PL/SQL extensions to, *189*
with values in record, *70*
restrictions on, *71*
See also DML statement
UPDATING conditional predicate, *5*
UROWID data type, *26*
user-defined exception, *13*
giving error code to, *18*
raising
with RAISE statement, *15*
with RAISE_APPLICATION_ERROR procedure, *18*
user-defined identifier, *6*
collecting data about, *68*
user-defined subtype, *30*
user-defined type
See Abstract Data Type (ADT)
USING_NLS_COMP, *55*
utlrp.sql script, *72*

V

V$RESERVED_WORDS view, *D-1*
V$RESULT_CACHE_OBJECTS, *37*
validation check for avoiding SQL injection, *25*
VALUE_ERROR exception, *10*
values_of_control, *18*
VARCHAR subtype, *24*
VARCHAR2 data type, *23*
VARCHAR2 static expression, *52*
variable
binding of, *11*
BOOLEAN, *27*
collection
See collection, *1*
composite, *1*
cursor
See cursor variable, *30*
host
cursor variable as, *41*
packages and, *2*
in cursor variable query, *35*
in explicit cursor query, *13*
locator, *7*
record
See record, *1*
remote public package, *3*
scalar
See scalar variable, *16*
with undefined value, *1*
variable-size array
See varray
variadic pseudo-operator, *56*
varray, *10*
assigning null value to, *24*
characteristics of, *2*
comparing to NULL, *29*
COUNT method for, *44*
FIRST and LAST methods for, *41*
returned by function, *42*
See also collection
VECTOR data type, *14*
VERSION constant, *60*
view
AUTHID property and, *52*
INSTEAD OF trigger and, *47*
materialized, trigger and, *47*
virtual column, *15*
%ROWTYPE attribute and, *59*
explicit cursors and, *15*
visibility
of identifier, *20*
of transaction, *55*

W

warning, compile-time, *2*
weak REF CURSOR type
creating, *31*
FETCH statement and, *33*
WHILE LOOP statement, *23*
syntax diagram, *191*
white list
See ACCESSIBLE BY clause
whitespace character
between lexical units, *14*

Copyright © 1996, 2025, Oracle and/or its affiliates.

whitespace character *(continued)*
in character literal, *10*
in database character set, *1*
wildcard character, *39*
WRAP function, *A-8*
wrap utility
See PL/SQL Wrapper utility
wrapping PL/SQL source text, *A-1*
inquiry directives and, *59*

Z

ZERO_DIVIDE exception, *10*
zero-length string, *10*

Copyright © 1996, 2025, Oracle and/or its affiliates.