

Oracle® Communications

Network Repository Function (NRF) Cloud Native User's Guide



Release 1.5.1

F30769-01

April 2020

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Copyright © 2019, 2020, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	What's New in This Guide	
2	Introduction	
	Acronyms	2-1
	OCNRF References	2-3
	My Oracle Support	2-3
	Locate Product Documentation on the Oracle Help Center Site	2-3
3	OCNRF Supported Services	
4	OCNRF Architecture	
5	Configuring OCNRF	
	General Configurations	5-1
	Configuring NF Screening	5-18
6	Configuring OCNRF using CNC Console	
	CNC Console Interface	6-1
	OCNRF Configuration	6-2
	Screening Rules	6-2
	CALLBACK URI	6-2
	NF FQDN	6-3
	NF IP Endpoint	6-4
	NF Type Register	6-5
	PLMN ID Parameters	6-6
	System Options	6-7
	Configuring System Options parameters	6-7

7 OCNRF Metrics, KPIs, and Alerts

OCNRF Metrics	7-1
OCNRF KPIs	7-26
OCNRF Alerts	7-28
OCNRF Alert Configuration	7-30

8 OCNRF Metrics

9 OCNRF KPIs

10 OCNRF Alerts

List of Figures

6-1 CNC Console

6-1

List of Tables

2-1	Acronyms	2-1
5-1	Service API Interface	5-1
5-2	Data structures supported by the GET Response Body	5-2
5-3	Data structures supported by the PUT Request Body	5-2
5-4	Data structures supported by the PUT Response Body	5-2
5-5	NrfSystemOptions - Parameters	5-5
5-6	Feature Status	5-16
5-7	OauthTokenAlgorithm	5-17
5-8	AudienceType	5-17
5-9	LogicalOperatorForScope	5-17
5-10	NFConfig	5-17
5-11	SubscriberIdType	5-17
5-12	ErrorInfo	5-17
5-13	ErrorCondition	5-18
5-14	ResponseHttpStatusCodes	5-18
5-15	Resources and Methods Overview	5-18
5-16	Data structures supported by the PUT Request Body	5-19
5-17	Data structures supported by the PUT Response Body	5-19
5-18	Data structures supported by the PATCH Request Body	5-20
5-19	Data structures supported by the PATCH Response Body	5-20
5-20	URI query parameters supported by the GET method	5-20
5-21	Data structures supported by the GET Response Body	5-21
5-22	ScreeningRulesResult - Parameters	5-21
5-23	Data structures supported by the GET Response Body	5-21
5-24	NfScreeningRules - Parameters	5-22
5-25	NfScreeningRulesData - Parameters	5-23
5-26	NfScreeningRulesListType - Parameters	5-23
5-27	NfScreeningType - Parameters	5-24
5-28	NfScreeningRulesListStatus - Parameters	5-24
5-29	FailureAction - Parameters	5-24
5-30	NfFqdn - Parameters	5-24
5-31	NfIpEndPoint - Parameters	5-25
5-32	NfCallbackUri - Parameters	5-25
5-33	PortRange - Parameters	5-26
5-34	Ipv6AddressRange - Parameters	5-26

5-35	Common data types	5-26
7-1	Dimensions Legend	7-1
7-2	NRF Common Metrics	7-2
7-3	NF Screening specific metrics	7-17
7-4	NF Access token metrics	7-19
7-5	NRF-SLF specific metrics	7-22
7-6	NRF Forwarding Metrics	7-24
7-7	KPI Details	7-27
7-8	OCNRF Alert Details	7-29
8-1	Dimensions Legend	8-1
8-2	NRF Common Metrics	8-2
8-3	NF Screening specific metrics	8-17
8-4	NF Access token metrics	8-19
8-5	NRF-SLF specific metrics	8-22
8-6	NRF Forwarding Metrics	8-24
9-1	KPI Details	9-1
10-1	OCNRF Alert Details	10-1

1

What's New in This Guide

New and Updated Features in Release 1.5.1

OCNRF supports message forwarding from one NRF to another NRF.

The following parameters are newly added to [General Configurations](#):

- nrfHostConfig
- nrfRerouteOnResponseHttpStatusCodes
- profileRetreivalForwardingEnabled
- subscriptionForwardingEnabled
- discoveryForwardingEnabled
- accessTokenForwardingEnabled
- nrfForwardingErrorResponses

The following metrics are newly added to [OCNRF Metrics](#):

- NF Access Token Requests Forwarded Total
- NF Access Token Forwarded Responses Total
- NF Profile Retrieval Requests Forwarded Total
- NF Profile Retrieval Forwarded Responses Total
- NF Status Subscribe Forwarded Requests Total
- NF Status Subscribe Forwarded Responses Total
- NF Discovery Forwarded Requests Total
- NF Discovery Forwarded Responses Total
- Avg Latency for NRF Message Forwarding

New and Updated Features in Release 1.5.0

Subscriber location function (SLF) has been introduced in this release.

- SLF supports SLF feature which identifies specific NF Type selection based on subscriber identity. Refer to [OCNRF Architecture](#).
- New parameters have been added to [Configuring OCNRF](#).
- New alerts have been added to [OCNRF Alerts](#).

2

Introduction

This document provides information about the role of Oracle Communications Network Repository Function (OCNRF) in 5G Service Based Architecture and how to configure/use OCNRF.

The OCNRF is a key component of the 5G Service Based Architecture. The OCNRF maintains an updated repository of all the Network Functions (NFs) available in the operator's network along with the services provided by each of the NFs in the 5G core that are expected to be instantiated, scaled and terminated with minimal to no manual intervention. In addition to serving as a repository of the services, the OCNRF also supports discovery mechanisms that allows NFs to discover each other and get updated status of the desired NFs.

The OCNRF supports the following functions:

- Maintains the profiles of the available NF instances and their supported services in the 5G core network.
- Allows consumer NF instances to discover other providers NF instances in the 5G core network.
- Allows NF instances to track the status of other NF instances.
- Provides Oauth2 based Access Token service for consumer NF authorization.
- Provides specific NF Type selection based on subscriber identity.
- Supports forwarding of messages from one NRF to another NRF.

The OCNRF interacts with every other NF in the 5G core network and it supports the above functions through the following services:

- Management Services
- Discovery Services
- AccessToken Service

Acronyms

The following table provides information about the acronyms and the terminology used in the document.

Table 2-1 Acronyms

Field	Description
3GPP	3rd Generation Partnership Project
5G-AN	5G Access Network
5GC	5G Core Network
5G System	3GPP system consisting of 5G Access Network (AN), 5G Core Network and UE
AMF	Access and Mobility Management Function

Table 2-1 (Cont.) Acronyms

API Gateway	Application that sits in front of an application programming interface (API) and acts as a single point of entry for a defined group of micro services.
CNE	Cloud Native Environment
Dimension	Dimension is a tag of Metric. For Example, "ocnrf_nfRegister_rx_requests_total {{ OriginatorNFType }} {{NrfLevel }} {{NfInstanceId }}" In the example above, OriginatorNFType, NrfLevel, and NfInstanceId are dimensions.
DNS	Domain Name System
FQDN	Fully Qualified Domain Name
KBs	Kubernetes
KPI	Key Performance Indicator
MMI	Machine Machine Interface
MPS	Messages Per Second
NDB	Network Database
NF	Network Function
Network Function	A functional building block within a network infrastructure, which has well defined external interfaces and well defined functional behavior. In practical terms, a network function is often a network node or physical appliance.
Network Slice	A logical network that provides specific network capabilities and network characteristics.
Network Slice instance	A set of Network Function instances and the required resources (For Example, compute, storage and networking resources) which form a deployed Network Slice.
NF Consumer	A generic way to refer to an NF which consumes services provided by another NF. For Example: An AMF is referred to as a Consumer when it consumes AMPolicy services provided by the PCF.
NF Instance	A specific instance of a network function type.
NF Producer or NF Provider	A generic way to refer to an NF which provides services that can be consumed by another NF. For Example: A PCF is a provider NF and provides AMPolicy Services
NRF	Network Repository Function or Network Function Repository Function
PCF	Policy Control Function
PLMN	Public Land Mobile Network
Resiliency	The ability of the NFV framework to limit disruption and return to normal or at a minimum acceptable service delivery level in the fame of a fault, failure, or an event that disrupts normal operation.
Scaling	Ability to dynamically extend/reduce resources granted to the Virtual Network Function (VNF) as needed. This includes scaling out/in or scaling up/down.
Scaling Out/In/ Horizontally	The ability to scale by add/remove resource instances (For Example, VMs). Also called scaling Horizontally.
Scaling Up/Down/ Vertically	The ability to scale by changing allocated resources, for example increase/decrease memory, CPU capacity or storage size.
SCP	Service Communication Proxy

Table 2-1 (Cont.) Acronyms

SEPP	Security Edge Protection Proxy
SLF	Subscriber Location Function
SMF	Session Management Function
URI	Uniform Resource Identifier

OCNRF References

- Cloud Native Environment 1.4 Installation Guide
- NRF Installation and Upgrade Guide

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select **2** for New Service Request.
2. Select **3** for Hardware, Networking and Solaris Operating System Support.
3. Select one of the following options:
 - For Technical issues such as creating a new Service Request (SR), select **1**.
 - For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Locate Product Documentation on the Oracle Help Center Site

Oracle Communications customer documentation is available on the web at the Oracle Help Center (OHC) site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at <http://www.adobe.com>.

1. Access the Oracle Help Center site at <http://docs.oracle.com>.
2. Click the **Industries** link. The **Industries Documentation** page displays.
3. Click the Oracle Communications link.

The **Communications** Documentation page appears. Most products covered by these documentation sets will appear under the headings **Signaling and Policy**.

4. Click on your Product and then the Release Number.

A list of the entire documentation set for the selected product and release appears.

3

OCNRF Supported Services


This section includes information about the services supported by OCNRF.

OCNRF supports the following services:

OCNRF Management Services

The OCNRF Management service is identified by the service operation name `Nnrf_NFManagement`.

OCNRF supports the following management services:

 **Note:**

The respective service operation name is mentioned next to each service.

- **Register NF instance** (`NFRegister`): Allows the NF instance to register its NF profile in the OCNRF along with the list of services provided by the NF instance.
- **Update NF instance** (`NFUpdate`): Enables the NF instance to partially update or replace the parameters of its NF profile in the OCNRF. It also allows to add or delete services provided by the NF instance.
This operation supports the following:
 - Complete Replacement of NF profile
 - Add, Remove, or Update attributes of NF Profile
 - Heart beat & Load info of NF
- **De-register NF instance** (`NFDeRegister`): Enables the NF instance to de-register its NF profile and the services provided by the NF instance from the 5G network.
- **Subscribe to Status** (`NFStatusSubscribe`): Enables the NF instance to subscribe the status changes of other NF instances registered in the OCNRF.
- **Unsubscribe to Status** (`NFStatusUnsubscribe`): Enables the NF instance to unsubscribe the status changes of other NF instances.
- **Notifications of Status** (`NFStatusNotify`): Sends notifications to subscribed NFs.
- **Retrival of NF list** (`NFListRetrieval`): Allows the retrieval of a list of NF Instances that are currently registered in OCNRF. This service operation is not allowed to be invoked from the OCNRF in a different PLMN.
- **Retrieval of a NF Profiles** (`NFProfileRetrieval`): Allows the retrieval of the NF profile of a given NF instance currently registered in OCNRF. This service operation is not allowed to be invoked from the OCNRF in a different PLMN.

OCNRF Discovery Service

The OCNRF Discovery service is identified by the service operation name `Nnrf_NFDiscovery Service`.

OCNRF supports the following discovery service:

- **Discover NF instance** (`NFDiscover`): OCNRF supports discovery of OCNRF Profile of the NF instances, or NF Services that match certain input criteria.

OCNRF Access Token Service

The OCNRF Access Token service handles 3GPP defined `AccessToken` service operations. OAuth2.0 based token is provided by OCNRF according to inputs provided by consumer network function in access token request.

OCNRF supports the following access token service:

- **Access Token** (`Nnrf_AccessToken`): OCNRF supports issuing OAuth2 token to consumer NFs for accessing specific Producer Services.

4

OCNRF Architecture

OCNRF comprises of various microservices deployed in Kubernetes based Cloud Native Environment (CNE, example: OC-CNE). Some common services like logs or metrics data collection, analysis and graphs or charts visualization, etc. are provided by the environment. The microservices integrate with them and provide them necessary data.

The followings are the components of OCNRF product:

- **NF Registration MicroService**
This microservice handles the following service operations:
 - receives and handles NFRegister service requests from the NFs
 - receives and handles NFUpdate service requests from the NFs
 - receives and handles NFDeregister service requests from the NFs
 - receives and handles NFListRetrieval service requests from the NFs
 - receives and handles NFProfileRetrieval service requests from the NFs
 - receives and handles the Heart-beat messages from the NFs
- **NF Subscription MicroService**
This microservice handles the following service operations:
 - receives and handles NFStatusSubscribe service requests from the NFs
 - receives and handles NFStatusUnsubscribe service requests from the NFs
 - sends NFStatusNotify service requests towards the subscribed NFs
- **NF Discover MicroService**
This microservice handles the following service operations:
 - receives and handles NFDiscover service requests from the NFs
- **NF Access Token microservice**
This microservice handles 3GPP defined AccessToken service operations. Oauth2.0 based token is provided by OCNRF according to inputs provided by consumer network function in access token request.
- **OCNRF Auditor MicroService**
This microservice is internal to OCNRF. This microservice performs the following tasks:
 - finds and deletes the expired subscription records
 - finds and deletes the profile records which have been SUSPENDED for a very long time
 - monitors the heart-beat expiry, mark the NF profiles as suspended and act appropriately on the suspended NF profiles
- **OCNRF Configuration Microservice**
This microservice is used to configure OCNRF. These configuration can be changed dynamically by a operator/user using REST based interface. This

configuration data is managed by the OCNRF configuration service and is stored in a separate data store.

- **OCNRF Ingress Gateway microservice**
This microservice is entry point for accessing OCNRF supported service operations.
- **OCNRF Egress Gateway microservice**
This microservice is responsible to route OCNRF initiated egress messages to other NFs.

OCNRF Features

Following are the OCNRF features:

NF Screening

NF Screening supports the functionality to screen the service requests received from 5G Network Functions (NFs) before allowing access to OCNRF services.

In this feature, OCNRF screens the incoming service operations from NFs on the basis of some attributes against set of rules configured at OCNRF. OCNRF processes the required services only if screening is successful.

This feature provides extra security by restricting the NF that can use the service of OCNRF. Operator can decide which NF with required attributes can access the services provided by OCNRF. To implement this, operator can configure various screening lists in which attributes can be configured to tell which attribute is allowed or not.



Note:

By default, NF Screening feature is globally disabled. This feature can be enabled by setting the **nfScreeningRulesListStatus** attribute as "ENABLED" using REST based Interface.

For configuring NF Screening feature, see [Configuring NF Screening](#).

The screening can be in the form of **Whitelist** or **Blacklist**.

- When a screening list is configured to operate as a whitelist, the request is allowed to access the service only if the corresponding attribute value is present in the whitelist.
- When a screening list is configured to operate as a blacklist, the request is allowed to access the service only if the corresponding attribute value is not present in the blacklist.

Screening Lists can have rules for **global** and per NF type.

- The global level screening lists allows operators to configure screening that is common to all NFs .
- Per NF Type level rules provides additional flexibility/granularity for screening that can be controlled on a per NF type basis.

 **Note:**

- The rules can be configured at both Global level and Per NF Type level.
- "NF type list allowed to Register" is available at Global level only.

Subscriber Location Function (SLF)

OCNRF supports SLF feature which identifies specific NF Type selection based on subscriber identity. For NF selection based on subscriber identity, OCNRF:

- Identifies if received NFDDiscover service request requires NF selection based on subscriber identity.
- Discovers the NF Group Id(s) using Nudr_GroupIDmap (aka SLF) Query service operation.
- Generates NFDDiscover service response using NF Group Id(s) and other parameters

5

Configuring OCNRF

Mandatory Configurations

Following is the mandatory parameter, which must be configured before using OCNRF:

- nrfPlmnList: PLMN(s) served by OCNRF. This must be configured before using any OCNRF Services.

OCNRF Configuration

OCNRF can be configured using HELM and REST configuration. Some configuration are performed during installation using HELM and few are modified using REST. For HELM configuration refer to *OCNRF Cloud Native Installation and Upgrade Guide*. The REST configurations can also be performed using Cloud Native Core (CNC) Console. Refer to [Configuring OCNRF using CNC Console](#) for more details.

General Configurations

Below table provides information for configuring general configurations in OCNRF.

General configuration - OCNRF system options

Table 5-1 Service API Interface

Resource Name	Resource URI	HTTP Method or Custom Operation	Description
nrf-configuration (Store)	{apiRoot}/nrf-configuration/v1/system-options	GET	Retrieves NRF system options configuration
nrf-configuration (Store)	{apiRoot}/nrf-configuration/v1/system-options	PUT	Updates NRF system options configuration

Resource Standard Methods

GET - Retrieve NRF System options configuration

Table 5-2 Data structures supported by the GET Response Body

Data Type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Cardin ality	Response Codes	Description
ProblemDet ails	M	1	500 Internal Server Error	The response body contains the error reason of the request message.
NrfSystemO ptions	M	1	200 OK	Response body contains the NRF current system options

PUT - Update NRF System options configuration**Table 5-3 Data structures supported by the PUT Request Body**

Data Type	P	Cardinality	Description
NrfSystemOption s	M	1	NrfSystemOptions details

Table 5-4 Data structures supported by the PUT Response Body

Data Type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Cardin ality	Response Codes	Description
ProblemDet ails	M	1	500 Internal Server Error	The response body contains the error reason of the request message.
ProblemDet ails	M	1	400 Bad request	The response body contains the error reason of the request message.
NA			204 No content	Specifies that the update of NrfSystemOptions is successful.

Example 5-1 REST Message Sample

Request_Type: GET and PUT

URL: *http://<k8s host>:<port>/nrf-configuration/v1/system-options*

```
{
  "generalSystemOptions": {
    "enableF3": true,
    "enableF5": true,
    "maximumHopCount": 3,
    "defaultLoad": 5,
    "defaultPriority": 100,
    "addPriorityInNFProfile": false,
  }
}
```

```
"addLoadInNFProfile": false
},
"nfScreeningSystemOptions": {
"nfScreeningFeatureStatus": "DISABLED",
"nfScreeningFailureHttpCode": 403
},
"nfAccessTokenSystemOptions": {
"oauthTokenAlgorithm": "ES256",
"oauthTokenExpiryTime": 3600,
"authorizeRequesterNf": "ENABLED",
"logicalOperatorForScope": "AND",
"audienceType": "NF_INSTANCE_ID"
},
"nfManagementSystemOptions": {
"nfHeartBeatTimer": 90,
"nfHeartBeatMissAllowed": 3,
"nfNotifyLoadThreshold": 5,
"nrfsupportForProfileChangesInResponse": true,
"subscriptionValidityDuration": 2160,
"nrfsupportForProfileChangesInNotification": false,
"nfProfileSuspendDuration": 168,
"acceptAdditionalAttributes": false
},
"nfDiscoverSystemOptions": {
"discoveryValidityPeriod": 3600,
"profilesCountInDiscoveryResponse": 3,
"discoveryResultLoadThreshold": null
},
"slfSystemOptions": {
"preferredSubscriberIdType": "SUPI",
"rerouteOnResponseHttpStatusCodes": {
"pattern": "^[3,5][0-9]{2}$"
}
}
},
"errorResponses": {
"slfErrorResponses": [
{
"errorCondition": "SLF_Missing_Mandatory_Parameters",
"errorCode": 400,
"errorResponse": "Mandatory parameter missing for SLF Lookup"
},
{
"errorCondition": "SLF_Configuration_Missing",
"errorCode": 404,
"errorResponse": "SLF configuration missing at NRF"
},
{
"errorCondition": "SLF_GroupId_NotFound",
"errorCode": 404,
"errorResponse": "Group Id Not found from SLF"
},
{
"errorCondition": "SLF_Not_Reachable",
"errorCode": 504,
```

```

"errorResponse": "SLF not reachable"
}
],
"nrfForwardingErrorResponses": [
{
"errorCondition": "NRF_Not_Reachable",
"errorCode": 504,
"errorResponse": "NRF not reachable"
},
{
"errorCondition": "NRF_Forwarding_Configuration_Missing",
"errorCode": 500,
"errorResponse": "Configuration missing for NRF forwarding"
},
{
"errorCondition": "NRF_Forwarding_Loop_Detection",
"errorCode": 508,
"errorResponse": "NRF forwarding loop detected"
}
]
},
"forwardingSystemOptions": {
"profileRetrievalForwardingEnabled": false,
"subscriptionForwardingEnabled": false,
"discoveryForwardingEnabled": true,
"accessTokenForwardingEnabled": false,
"nrfHostConfig": [{
"apiVersions": [{
"apiVersionInUri": "v1",
"apiFullVersion": "15.5.0"
}],
"scheme": "http",
"fqdn": "ocnrf-1-ingressgateway.ocnrf.svc.cluster.local",
"priority": 100,
"nfInstanceId": "c56a4180-65aa-42ec-a945-5fd21dec0538",
"port": 80
}],
"nrfRerouteOnResponseHttpStatusCodes": {
"codeList" : [404]
}
}
}

```

Data Model

Note:

If the attributes other than **profilesCountInDiscoveryResponse** and **discoveryResultLoadThreshold** are not present, use existing value in the database. It can be the default value or the last updated value. At least one attribute must be present to ensure that the PUT request is not empty. **nrfPlmnList** is a mandatory parameter that needs to be configured before using OCNRF.

Table 5-5 NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
generalSystemOptions	nrfPlmnList	array		O		This value shall have at least one PLMN supported by OCNRF and this value shall be set before using OCNRF. See the footnote.
generalSystemOptions	enableF3	ENUM	TRUE or FALSE	O	TRUE	OCNRF will function as per 29510 v15.3 specification
generalSystemOptions	enableF5	ENUM	TRUE or FALSE	O	TRUE	OCNRF will function as per 15.5 specification
generalSystemOptions	defaultLoad	INTEGER	0 - 100	O	5	This attribute is default value of NF Load and will be used if NFProfile does not have Load attribute set by NF.
generalSystemOptions	defaultPriority	INTEGER	0 - 65535	O	100	This attribute is default value of NF Priority and will be used if NFProfile does not have priority attribute set by NF.
generalSystemOptions	addLoadInNFProfile	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	Value of default NF load will be set in NF Load attribute of NFProfile while sending in NFDDiscover response and NFProfile sent in NFNotify operation, in case NFProfile does not have Load attribute.
generalSystemOptions	addPriorityInNFProfile	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	Value of default NF Priority will be set in NF Priority attribute of NFProfile while sending in NFDDiscover response and NFProfile sent in NFNotify operation, in case NFProfile does not have Priority attribute.
generalSystemOptions	maximumHopCount	INTEGER	>0	O	3	Maximum number of Nodes (SLF/NRF's) that OCNRF can communicate, to service a request.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
forwardingSystemOptions	nrfHostConfig	array		O		<p>NRF Host Configuration is used to build the Target NRF's APIRoot for forwarding various service operation messages to another NRF. There is possibility to configure multiple NRFs, however only two NRF details are considered. The NRF with highest priority is considered as Primary NRF and the NRF with second highest priority is considered as Secondary NRF. Note:</p> <ul style="list-style-type: none"> • Only supported apiVersion is v1. • Lower value indicates higher priority. <p>See the footnote.</p>
forwardingSystemOptions	nrfRerouteOnResponseHttpStatusCodes	Response HttpStatusCodes	pattern or specific code list	O	"pattern": "^3,5[0-9]{2}\$"	<p>This configuration is used to determine if the service operation message needs to be forwarded to Secondary NRF. After getting response from primary NRF, if response status code from primary NRF is present/matches with this configured response status code, then NRF reroutes the request to the secondary NRF. Refer nrfHostConfig for details for Primary and Secondary NRF details. See the footnote.</p>

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
forwardingSystemOptions	profileRetrievalForwardingEnabled	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	This attribute controls the forwarding of NfProfileRetrieval service operation messages. If the flag is set to true and NRF is not able to complete the request due to unavailability of any matching profile, then NRF forwards the NfProfileRetrieval request to the configured NRF host(s) and relays the response received from forwarding NRF to the Consumer NF. If flag is false, NRF will not forward the NfProfileRetrieval request in any case. It will return a response to consumer NF without forwarding it. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
forwardingSystemOptions	subscriptionForwardingEnabled	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	This attribute controls the forwarding of NFStatusSubscribe, NFStatusUnsubscribe service operation messages. If the flag is set to true and NRF is not able to complete the request due to unavailability of any matching profile, then NRF forwards the NfStatusSubscribe/ NfStatusUnSubscribe request to the configured NRF host(s) and relays the response received from forwarding NRF to the Consumer NF. If flag is false, NRF will not forward the NfStatusSubscribe/ NfStatusUnSubscribe request in any case. It will return a response to consumer NF without forwarding it. Note: NfStatusSubscribe forwarding is supported only if the NfInstanceIdCondition is requested in the Subscription Request. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
forwardingSystemOptions	discoveryForwardingEnabled	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	This attribute controls the forwarding of NfDiscover service operation messages. If the flag is set to true and NRF is not able to complete the request due to unavailability of any matching profile, then NRF forwards the NfDiscover request to the configured NRF host(s) and relays the response received from forwarding NRF to the Consumer NF. If flag is false, NRF will not forward the NfDiscover request in any case. It will return a response to consumer NF without forwarding it. See the footnote.
forwardingSystemOptions	accessTokenForwardingEnabled	ENUM (TRUE, FALSE)	TRUE, FALSE	O	FALSE	This attribute controls the forwarding of AccessToken service operation messages. If the flag is set to true and NRF is not able to complete the request due to unavailability of any matching Producer NF, then NRF forwards the AccessToken request to the configured NRF host(s) and relays the response received from forwarding NRF to the Consumer NF. If flag is false, NRF will not forward the AccessToken request in any case. It will return a response to consumer NF without forwarding it. See the footnote.
nfScreeningSystemOptions	nfScreeningFeatureStatus	Feature Status		O	DISABLED	This attribute will inform if NF Screening Feature need to be enabled or not. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
nfScreeningSystemOptions	nfScreeningFailureHttpCode	INTEGER		O	403	This attribute will inform what HTTP status code will be returned if incoming request doesn't pass NF Screening rules barrier. See the footnote.
nfManagementSystemOptions	nfHeartBeatTimer	INTEGER	Min: 30 seconds Max: 300 seconds	O	90	Value entered for this attribute will be treated as seconds. If Heartbeat timer value is not received in NFProfile during NFRegister, this default value will be used by OCNRF. If Heartbeat timer value is received in NFProfile during NFRegister, minimum value will be used for validation and limit purpose. It means if value provided less than minimum value, then minimum value will be taken as heartbeat timer value. If Heartbeat timer value is received in NFProfile during NFRegister, maximum value of range will be used for validation and limit purpose. It means if value provided more than maximum value, then maximum value will be taken as heartbeat timer value. See the footnote.
nfManagementSystemOptions	nfHeartBeatMissAllowed	INTEGER		O	3	NF HeartBeat miss allowed after which NFProfile will be marked as suspended. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
nfManagementSystemOptions	nfNotifyLoadThreshold	INTEGER	0 - 99	O	5	Notification trigger will be generated only when difference between the 'load' value reported by NF in most recent heartbeat and the 'load' reported in the last generated notification more than configured value of loadThreshold parameter. See the footnote.
nfManagementSystemOptions	nrfSupportForProfileChangesInResponse	ENUM (TRUE, FALSE)	TRUE or FALSE	O	TRUE	Flag to enable and disable the feature which will tell OCNRF instead of complete profile, send mandatory attributes and attributes modified by NRF in the response of NFRegister and NFUpdate (full profile replacement) service operations. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
nfManagementSystemOptions	subscriptionValidityDuration	INTEGER	1 hour - 180 days (4320 hours)	O	2160	Value entered for this attribute will be treated as hours. If Validity time attribute is not received in SubscriptionData during NFSubscribe, this default value will be used for calculation of validity time (current time + default duration). If Validity time attribute is received in SubscriptionData during NFSubscribe, this is minimum value will be used for validation and limit purpose. It means if value provided is less than (current time + minimum value), then calculated value with minimum duration value will be considered as validity time of subscription and similarly in case validity time is more than (current time + maximum duration), then calculated value with maximum duration will be considered as validity time of subscription. See the footnote.
nfManagementSystemOptions	nrfSupportForProfileChangesInNotification	ENUM	TRUE or FALSE	O	FALSE	Flag to enable/disable to send profileChanges attribute instead of NFProfile in Notification. See the footnote.
nfManagementSystemOptions	nfProfileSuspendDuration	INTEGER		O	168	An NF is allowed to be in SUSPENDED state for this duration before it is deleted from OCNRF database. Value entered for this attribute will be treated as hours. See the footnote.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
nfManagementSystemOptions	acceptAdditionalAttributes	ENUM	TRUE or FALSE	O	FALSE	This attribute will tell whether NRF need to preserve additional attributes not defined in NFProfile/NFService in NRF database. See the footnote.
nfDiscoverSystemOptions	discoveryValidityPeriod	INTEGER		O	3600	Discovery request will be valid till this value. Requester NF shall do discovery again to get latest values. Value entered for this attribute will be treated as seconds. See the footnote.
nfDiscoverSystemOptions	profilesCountInDiscoveryResponse	INTEGER	1 - 10	C	3	This value will restrict NF profile count in NFDdiscover response. If this attribute is not present in configuration request then this functionality will get disabled, in that case all the profiles will be returned. If GET option returns this attribute value as null, then it means this feature is disabled. Note:- If Limit attribute is present in SearchData URI, then this attribute will not be used.
nfDiscoverSystemOptions	discoveryResultLoadThreshold	INTEGER	1 - 100	C		NFDdiscover response will contain NF profiles with load attribute value less than this configured value. If this attribute is not present in configuration request then this functionality will get disabled. While doing GET on NrfSystemOptions resource if this value is null, then it means this feature is disabled.
nfAccessTokenSystemOptions	oauthTokenAlgorithm	OauthTokenAlgorithm		O	ES256	Access token key algorithm which will be used to sign the oauth token.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
nfAccessTokenSystemOptions	oauthTokenExpiryTime	INTEGER	1 - 604800	O	3600	Oauth token expiry time. This value is in seconds.
nfAccessTokenSystemOptions	authorizeRequesterNf	Feature Status		O	ENABLED	This is validation done by OCNRF. NRF will issue the access token only if the requester NF is registered with NRF.
nfAccessTokenSystemOptions	audienceType	Audience Type		O	NF_INSTANCE_ID	This value will decide the AudienceType in AccessTokenClaim. This value will be used only if targetNfInstanceId is not set in AccessTokenRequest.
nfAccessTokenSystemOptions	logicalOperatorForScope	LogicalOperatorForScope		O	AND	This value will decide whether values in scope will have relationship AND or OR. If value is AND, while looking for producer network function profiles, token will be issued for profiles matching all the services-names present in scope. If value is OR, token will be issued for profiles matching any of the services-names present in scope.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
slfSystemOptions	slfHostConfig	array (NfConfig)		C		SLF Host Configuration. It may contain multiple SLF hosts. But SLF with highest priority will be selected. This configuration may contain multiple SLF hosts. But SLF with highest priority will be selected. Lower values indicate a higher priority. If supportedNfTypeList is set, then operator must set this attribute. If this attribute is already set then there is no need to provide the value again. If this attribute is already set then there is no need to provide the value again.
slfSystemOptions	supportedNfTypeList	array		C		NF Type list for which SLF need to be supported. This is key configuration for enabling SLF feature on OCNRF. SLF look up will happen only for NF Types mentioned in this configuration. If this value is set, then slfHostConfig shall also be set.
slfSystemOptions	preferredSubscriberIdType	SubscriberIdType		O		This attribute will only be used, in case different type of subscriber identifiers (SUPI, GPSI) are present in NfDiscover service operation message, which subscriber identifier shall be used for the query to SLF.

Table 5-5 (Cont.) NrfSystemOptions - Parameters

Parent Attribute Name	Attribute Name	Data Type	Constraints	Mandatory(M) / Optional(O) / Conditional(C)	Default Values	Description
slfSystemOptions	rerouteOnResponseHttpStatusCodes	Response HttpStatusCodes		O		This attribute will be used after getting response from primary SLF (SLF Config with highest priority), if response code is present in this list, then NRF will reroute the SLF query to secondary SLF (SLF Config with second highest priority).
errorResponses	slfErrorResponses	array (ErrorInfo)		O		This attribute defines the error responses which may be sent during SLF processing. This attribute will allow to update the error response status code and error response description for preloaded error conditions.
errorResponses	nrfForwardingErrorResponses	array (ErrorInfo)		O		This attribute defines the error responses which may be sent during NRF Forwarding scenarios. This attribute will allow to update the error response status code and error response description for preloaded error conditions.

 **Note:**

If the attribute is not present, existing value in database is used. It can be the default value or the last updated value. But at least one attribute must be present so that the PUT request is not empty.

Table 5-6 Feature Status

Enumeration value	Description
ENABLED	Enables the feature.
DISABLED	Disables the feature.

Table 5-7 OAuthTokenAlgorithm

Enumeration value	Description
ES256	ES256 algorithm key will be used to sign the oauth token
RS256	RS256 algorithm key will be used to sign the oauth token

Table 5-8 AudienceType

Enumeration value	Description
NF_INSTANCE_ID	NF Instance Id(s) in audience IE of AccessTokenClaim.
NF_TYPE	NF Type in audience IE of AccessTokenClaim.

Table 5-9 LogicalOperatorForScope

Enumeration value	Description
AND	If value is AND, while looking for producer network function profiles, token will be issued for profiles matching all the services-names present in scope.
OR	If value is OR, token will be issued for profiles matching any of the services-names present in scope.

Table 5-10 NFConfig

Attribute	Data Type	Presence	Description
apiVersions	NFServiceVersion	M	API Version of NF
scheme	UriScheme	M	URI schema supported by NF
fqdn	Fqdn	M	FQDN of NF
port	integer	O	default value:80, Port of NF
apiPrefix	string	O	ApiPrefix
priority	integer	M	Priority of NF
nfInstanceid	string	O	nfInstanceid of NF

Table 5-11 SubscriberIdType

Enumeration Value	Description
SUPI	Subscriber Id is SUPI
GPSI	Subscriber Id is GPSI

Table 5-12 ErrorInfo

Attribute	Data Type	Presence	Description
error_condition	ErrorCondition	ReadOnly	Error Conditions
error_response_code	Integer	M	This response code will be used when corresponding error condition will occur.

Table 5-12 (Cont.) ErrorInfo

Attribute	Data Type	Presence	Description
error_response_description	String	M	This response description will be used when corresponding error condition will occur.

Table 5-13 ErrorCondition

Error Condition	Error Response Code	Description
SLF_Missing_Mandatory_Parameters	400	SLF mandatory parameters are missing
SLF_Configuration_Missing	404	SLF Configuration is missing at NRF
SLF_Not_Reachable	504	SLF is not reachable from NRF
SLF_GroupId_NotFound	404	Group Id Not found from SLF
NRF_Not_Reachable	504	Primary/Secondary NRF is not reachable from NRF
NRF_Forwarding_Configuration_Missing	404	NRF forwarding configuration missing at NRF
NRF_Forwarding_Loop_Detection	508	Loop detected while processing NRF Service Operation Message

Table 5-14 ResponseHttpStatusCodes

Attribute	Data Type	Presence	Description
pattern	String	C	Either pattern or codeList is present.
codeList	array (integer)	C	Either pattern or codeList is present.

Configuring NF Screening

This section provides information for configuring NF Screening.

Table 5-15 Resources and Methods Overview

Resource Name	Resource URI	HTTP Method or Custom Operation	Description
screening-rules (Store)	{apiRoot}/nrf-configuration/v1/screening-rules	GET	Returns all the screening rules

Table 5-15 (Cont.) Resources and Methods Overview

Resource Name	Resource URI	HTTP Method or Custom Operation	Description
screening-rules (Document)	{apiRoot}/nrf-configuration/v1/screening-rules/{nfScreeningRulesListType}	GET	Returns screening rules corresponding to the specified NF Screening Rule List Type.
screening-rules (Document)	{apiRoot}/nrf-configuration/v1/screening-rules/{nfScreeningRulesListType}	PUT	Replace the complete specified NF Screening Rule List Type
screening-rules (Document)	{apiRoot}/nrf-configuration/v1/screening-rules/{nfScreeningRulesListType}	PATCH	Partially updates the specified NF Screening Rule List Type.

Resource Standard Methods**PUT - Updates a particular screening rule** (except read only attributes)**Table 5-16 Data structures supported by the PUT Request Body**

Data Type	Mandatory(M)/ Optional(O) / Conditional(C)	Cardinality	Description
NfScreening Rules	M	1	NF Screening Rules which need to be updated.

Table 5-17 Data structures supported by the PUT Response Body

Data Type	Mandatory(M) / Optional(O) / Conditional(C)	Cardinality	Response Codes	Description
NA	M	1	204 No content	Successful response
ProblemDetails	C	1	404 NOT FOUND 500 INTERNAL ERROR 400 BAD REQUEST	The response body contains the error reason of the request message.

PATCH - Updates partially a particular screening rule (except read only attributes)

Table 5-18 Data structures supported by the PATCH Request Body

Data Type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Cardin ality	Description
PatchDocument	M	1	It contains the list of changes to be made to the NF Screening Rule, according to the JSON PATCH format specified in IETF RFC 6902 [13].

Table 5-19 Data structures supported by the PATCH Response Body

Data Type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Cardin ality	Response Codes	Description
NA	M	1	204 No content	Successful response
ProblemDetails	C	1	404 NOT FOUND 500 INTERNAL ERROR 400 BAD REQUEST	The response body contains the error reason of the request message.

GET - Collection of screening rules

Table 5-20 URI query parameters supported by the GET method

Name	Data Type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Cardin ality	Description
nfScreeningRulesListType	NfScreeningRulesListType	O	0.1	The type of NF screening rules on this basis of rules list type.
nfScreeningRulesListStatus	NfScreeningRulesListStatus	O	0.1	Screening Rules List on the basis of status (Enabled or Disabled)

Table 5-21 Data structures supported by the GET Response Body

Data Type	Mandatory(M)/ Optional(O) / Conditiona I(C)	Cardin ality	Response Codes	Description
ScreeningRulesR esult	M	1	200 OK	The response body contains a list of screening lists, or an empty object if there are no screening rules to return in the query result.
ProblemDetails	C	1	500 INTERNAL ERROR 400 BAD REQUEST	The response body contains the error reason of the request message.

Table 5-22 ScreeningRulesResult - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona I(C)	Cardin ality	Description
nfScreening RulesList	array (NfScre eningR ules)	M	0.N	It shall contain an array of NF Screening List. An empty array means there is no NF Screening list configured.

GET - Particular screening list rule**Table 5-23 Data structures supported by the GET Response Body**

Data Type	Mandatory(M)/ Optional(O) / Conditiona I(C)	Cardin ality	Response Codes	Description
NfScreeningRule s	M	1	200 OK	The response body contains requested screening list.
ProblemDetails	C	1	500 INTERNAL ERROR 400 BAD REQUEST	The response body contains the error reason of the request message.

Table 5-24 NfScreeningRules - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Description
nfScreeningRulesListType	NfScreeningRulesListType	C	ReadOnly. It will be returned while retrieving the rule.
nfScreeningType	NfScreeningType	M	Screening type of complete screening list. Blacklist or whitelist. All the rules can be either blacklist or whitelist.
nfScreeningRulesListStatus	NfScreeningRulesListStatus	M	This attribute will enable or disable complete screening list.
globalScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if global screening rules need to be configured.
customNfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for custom NF need to be configured.
nrfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for NRF need to be configured.
udmScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for UDM need to be configured.
amfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for AMF need to be configured.
smfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for custom SMF need to be configured.
ausfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for AUSF need to be configured.
nefScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for NEF need to be configured.
pcfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for PCF need to be configured.
nssfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for NSSF need to be configured.
udrScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for UDR need to be configured.
lmfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for IMF need to be configured.
gmlcScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for GMLC need to be configured.
fiveG_EirScreeningRules	NfScreeningRulesData	O	This attribute will be present if screening rules for EIR need to be configured.
seppScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for SEPP need to be configured.
upfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for UPF need to be configured.
n3iwfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for IWF need to be configured.

Table 5-24 (Cont.) NfScreeningRules - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona I(C)	Description
afScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for AF need to be configured.
udsfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for UDSF need to be configured.
bsfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for BSF need to be configured.
chfScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for CHF need to be configured.
nwdafScreeningRulesData	NfScreeningRulesData	O	This attribute will be present if screening rules for NWDAF need to be configured.

Table 5-25 NfScreeningRulesData - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona I(C)	Description
failureAction	FailureAction	M	
nfFqdn	NfFqdn	C	If this attribute is present in message it shouldn't be null. This attribute will be present if screeningListType is NF_FQDN.
nfCallbackUriList	array(NfCallbackUri)	C	If this attribute is present in message it shouldn't be null. This attribute will be present if screeningListType is CALLBACK_URI.
nflpEndPointList	array(NflpEndPoint)	C	If this attribute is present in message it shouldn't be null. This attribute may be present if screeningListType is NF_IP_ENDPOINT.
plmnList	array(PlmnId)	C	If this attribute is present in message it shouldn't be null. This attribute may be present if screeningListType is PLMN_ID.
nfTypeList	array(NfTypeList)	C	If this attribute is present in message it shouldn't be null. This attribute may be present if screeningListType is NF_TYPE_REGISTER.

Table 5-26 NfScreeningRulesListType - Parameters

Enumeration Value	Description
"NF_FQDN"	Screening List type for NF FQDN
"NF_IP_ENDPOINT"	Screening list type for IP Endpoint

Table 5-26 (Cont.) NfScreeningRulesListType - Parameters

Enumeration Value	Description
"CALLBACK_URI"	Screening list type for callback URIs in NF Service and nfStatusNotificationUri in SubscriptionData
"PLMN_ID"	Screening list type for PLMN ID
"NF_TYPE_REGISTER"	Screening list type for allowed NF Types to register

Table 5-27 NfScreeningType - Parameters

Enumeration Value	Description
"BLACKLIST"	When a screening list is configured to operate as a blacklist, the request is allowed to access the service only if the corresponding attribute value is not present in the blacklist.
"WHITELIST"	When a screening list is configured to operate as a whitelist, the request is allowed to access the service only if the corresponding attribute value is present in the whitelist.

Table 5-28 NfScreeningRulesListStatus - Parameters

Enumeration Value	Description
"ENABLED"	Screening List feature is enabled to apply the rules.
"DISABLED"	Screening List feature is disabled.

Table 5-29 FailureAction - Parameters

Enumeration Value	Description
"CONTINUE"	Continue Processing
"SEND_ERROR"	Send response with configured HTTP status code

Table 5-30 NfFqdn - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O)/ Conditional(C)	Description
fqdn	array(FQDN)	C	Exact FQDN to be matched. This is conditional, at least one attribute shall be present.
pattern	array(string)	C	Regular Expression for FQDN. This is conditional, at least one attribute shall be present.

Table 5-31 NflpEndPoint - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O)/ Conditional(C)	Description
ipv4Address	Ipv4Addr	C	IPv4 address to be matched.
ipv4AddressRange	Ipv4AddressRange	C	Range of IPv4 addresses.
ipv6Address	Ipv6Addr	C	IPv6 address to be matched.
ipv6AddressRange	Ipv6AddressRange	C	Range of IPv6 addresses.
port	array(integer)	O	If this attribute is not configured then it will not be considered for validation.
portRange	array(PortRange)	O	If this attribute is not configured then it will not be considered for validation.

 **Note:**

Depending on the conditions, only one of the ipv4Address, ipv4AddressRange, ipv6Address, and ipv6AddressRange attributes can be present.

Table 5-32 NfCallbackUri - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O)/ Conditional(C)	Description
fqdn	FQDN	C	Exact Fqdn to be matched.
pattern	string	C	Regular Expression for FQDN, Ipv4Address or Ipv6Address.
ipv4Address	Ipv4Addr	C	IPv4 address to be matched.
ipv4AddressRange	Ipv4AddressRange	C	Range of IPv4 addresses.
ipv6Address	Ipv6Addr	C	IPv6 address to be matched.
ipv6AddressRange	Ipv6AddressRange	C	Range of IPv6 addresses.
port	array(integer)	O	If this attribute is not configured then it will not be considered for validation.
portRange	array(PortRange)	O	If this attribute is not configured then it will not be considered for validation.

 **Note:**

Depending on the conditions, only one of the fqdn, pattern, ipv4Address, ipv4AddressRange, ipv6Address, and ipv6AddressRange attributes can be present.

Table 5-33 PortRange - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Description
start	integer	M	First value identifying the start of port range.
end	integer	M	Last value identifying the end of port range.

Table 5-34 Ipv6AddressRange - Parameters

Attribute Name	Data type	Mandatory(M)/ Optional(O) / Conditiona l(C)	Description
start	Ipv6Addr	M	First value identifying the start of an IPv6 Address range.
end	Ipv6Addr	M	Last value identifying the end of an IPv6 Address range.

Table 5-35 Common data types

Data Type	Reference
Ipv6Addr	3GPP TS 29.571
Ipv4Addr	3GPP TS 29.571
Ipv4AddressRange	3GPP TS 29.510
PlmnId	3GPP TS 29.571
Uri	3GPP TS 29.571
IpEndPoint	3GPP TS 29.510
NFType	3GPP TS 29.510
ProblemDetails	3GPP TS 29.571

REST message samples**Screening List Update**

NF screening rules to update particular rule configuration (except read only attributes)

URL: *http://host:port/nrf-configuration/v1/screening-rules /CALLBACK_URI*

Request_Type: PUT

Content-Type: *application/json*

Request Body

NF screening rules to get all of the configured rules

```

{
  "nfScreeningType": "BLACKLIST",
  "nfScreeningRulesListStatus": "ENABLED",
  "globalScreeningRulesData": {
    "failureAction": "SEND_ERROR",
    "nfCallBackUriList": [
      {
        "ipv4AddressRange": {
          "start": "155.90.171.123",
          "end": "233.123.19.165"
        },
        "ports": [10, 20]
      },
      {
        "ipv6AddressRange": {
          "start": "1001:cdba:0000:0000:0000:0000:3257:9652",
          "end": "3001:cdba:0000:0000:0000:0000:3257:9652"
        }
      }
    ]
  },
  "amfScreeningRulesData": {
    "failureAction": "CONTINUE",
    "nfCallBackUriList": [
      {
        "fqdn": "ocnrf-d5g.oracle.com"
      },
      {
        "ipv4AddressRange": {
          "start": "155.90.171.123",
          "end": "233.123.19.165"
        },
        "ports": [10, 20]
      }
    ]
  }
}

```

URL: *http://host:port/nrf-configuration/v1/ screening-rules /*

Request_Type: GET

Response Body

```

{
  "nfScreeningRulesList": [
    {
      "nfScreeningRulesListType": "NF_FQDN",
      "nfScreeningType": "BLACKLIST",

```

```
    "nfScreeningRulesListStatus": "DISABLED"
  },
  {
    "nfScreeningRulesListType": "NF_IP_ENDPOINT",
    "nfScreeningType": "BLACKLIST",
    "nfScreeningRulesListStatus": "ENABLED",
    "amfScreeningRulesData": {
      "failureAction": "SEND_ERROR",
      "nfIpEndPointList": [
        {
          "ipv4Address": "198.21.87.192",
          "ports": [
            10,
            20
          ]
        }
      ]
    }
  },
  {
    "nfScreeningRulesListType": "CALLBACK_URI",
    "nfScreeningType": "BLACKLIST",
    "nfScreeningRulesListStatus": "ENABLED",
    "globalScreeningRulesData": {
      "failureAction": "SEND_ERROR",
      "nfCallBackUriList": [
        {
          "fqdn": "ocnrf-d5g.oracle.com",
```

```
        "ports": [
            10,
            20
        ]
    }
]
}
},
{
    "nfScreeningRulesListType": "PLMN_ID",
    "nfScreeningType": "BLACKLIST",
    "nfScreeningRulesListStatus": "DISABLED"
},
{
    "nfScreeningRulesListType": "NF_TYPE_REGISTER",
    "nfScreeningType": "WHITELIST",
    "nfScreeningRulesListStatus": "ENABLED",
    "globalScreeningRulesData": {
        "failureAction": "SEND_ERROR",
        "nfTypeList": [
            "AMF",
            "SMF",
            "PCF"
        ]
    }
}
]
```

```
}
```

NF screening rules to get a particular configured rule

URL: *http://host:port/nrf-configuration/v1/screening-rules/CALLBACK_URI*

Request_Type: GET

Response Body

```
{  
  
  "nfScreeningRulesListType": "CALLBACK_URI",  
  
  "nfScreeningType": "BLACKLIST",  
  
  "nfScreeningRulesListStatus": "ENABLED",  
  
  "globalScreeningRulesData": {  
  
    "failureAction": "SEND_ERROR",  
  
    "nfCallBackUriList": [  
  
      {  
  
        "ipv4AddressRange": {  
  
          "start": "155.90.171.123",  
  
          "end": "233.123.19.165"  
  
        },  
  
        "ports": [  
  
          10,  
  
          20  
  
        ]  
  
      },  
  
      {  
  
        "ipv6AddressRange": {  
  
          "start": "1001:cdba:0000:0000:0000:0000:3257:9652",  
  
          "end": "3001:cdba:0000:0000:0000:0000:3257:9652"  
  
        }  
  
      }  
  
    ]  
  
  }  
  
}
```

```
    ]
  },
  "amfScreeningRulesData": {
    "failureAction": "SEND_ERROR",
    "nfCallbackUriList": [
      {
        "fqdn": "ocnrf-d5g.oracle.com"
      },
      {
        "ipv4AddressRange": {
          "start": "155.90.171.123",
          "end": "233.123.19.165"
        },
        "ports": [
          10,
          20
        ]
      }
    ]
  }
}
```

NF screening rules for partial rule update

http://host:port/nrf-configuration/v1/screening-rules/CALLBACK_URI

Request_Type: PATCH

Content-Type: *application/json-patch+json*

Request Body

```
[
  { "op": "remove", "path": "/globalScreeningRulesData/nfCallbackUriList/2/ports/0" },
  { "op": "replace", "path": "/globalScreeningRulesData/"
```



```
failureAction", "value": "CONTINUE"}  
]
```

URL: *http://host:port/nrf-configuration/v1/screening-rules/CALLBACK_URI*

Request_Type: PATCH

Content-Type: *application/json-patch+json*

Response Body

```
[{"op": "add", "path": "/nrfScreeningRulesData", "value": {"failureAction":  
"SEND_ERROR", "nfCallBackUriList": [{"ipv4AddressRange": {"start":  
"189.163.192.10", "end": "190.178.127.10"}}]}}
```

6

Configuring OCNRF using CNC Console

This section provides information for configuring Oracle Communications Network Repository Function.


CNC Console Interface

CNC Console Login

Following is the procedure to login to CNC Console:

1. Open any browser.
2. Enter the URL: ***http://<host name>:<port number>***.
3. Enter valid credentials.
4. Click **Log in**. The CNC Console interface is displayed.

Figure 6-1 CNC Console

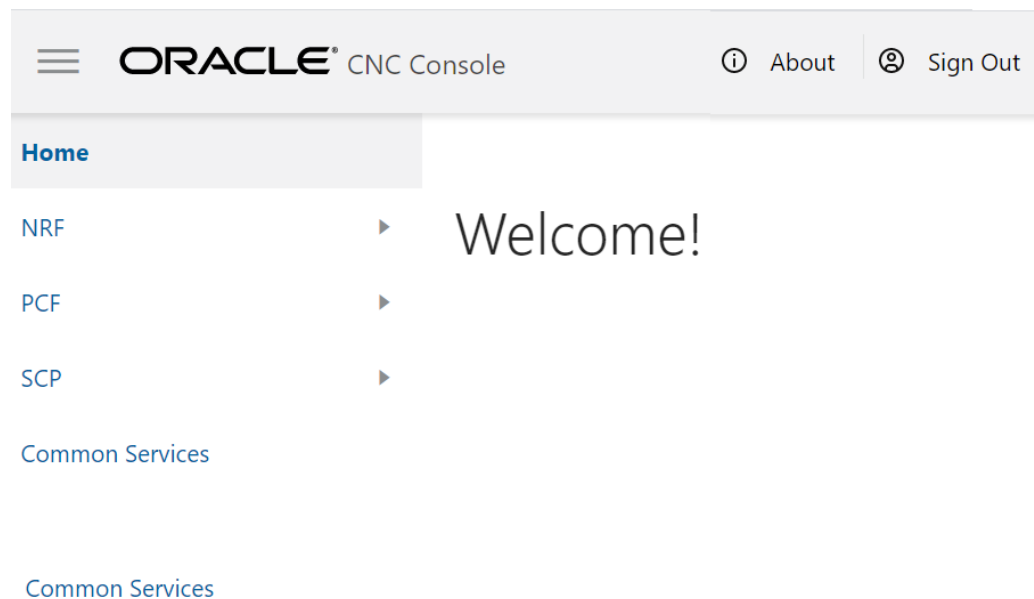

Top Ribbon

The top ribbon has following options:

1. About
2. Sign Out
3. Help

**Note:**

The Collapse button at the left side allows the user to collapse the left pane. Help navigates to the swagger.

Left Pane - NFs and APIs

The left pane displays the list of Network Functions and respective APIs.

Right Pane - Details View

The right pane displays details of the parameters that can be updated in the selected API.

OCNRF Configuration

This section provides configuration steps for OCNRF parameters using CNC Console.

Screening Rules

NF Screening supports the functionality to screen the service requests received from 5G Network Functions (NFs) before allowing access to OCNRF services. In this feature, OCNRF screens the incoming service operations from NFs on the basis of some attributes against set of rules configured at OCNRF. OCNRF processes the required services only if screening is successful. This feature provides extra security by restricting the NF that can use the service of OCNRF.

Using the screening lists, operator can decide which NF can access the services provided by OCNRF by configuring attributes based on the requirement.

CALLBACK URI

Screening list type for callback URIs in NF Service and nfStatusNotificationUri in SubscriptionData.

NRF screens the callback URI present in the request before allowing access to management service. Host present in callback URI (FQDN+port or IP+port) must be used for screening. In CALLBACK URI, the attributes that can be modified are FQDN, Port and IP address.

Configuring Callback URI Parameters

Following is the procedure to configure Callback URI parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > CALLBACK URI**. Select **CALLBACK URI**.
2. Click **Edit** from the top right side to edit or update a CALLBACK URI parameter. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
4. Click **Save**.

Modifying NF Callback URIs

The user can add, edit and delete the NF Callback URIs.

Adding the NF Callback URIs

To add a NF Callback URIs:

1. Click **Add** from the top left of the NF Callback URI table. The **Add NF Callback URI** Screen appears.
2. Enter the attribute values. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
3. Click **Save**.

Editing the NF Callback URIs

To edit an existing NF Callback URIs:

1. Click **Edit** from the top left of the NF Callback URI table. The **Edit NF Callback URI** Screen appears.
2. Enter the attribute values.
3. Click **Save**.

Deleting the NF Callback URIs Parameters

To delete a NF Callback URIs Parameter:

1. Click **Delete** from the action items of NF Callback URIs Screen. The "Do you want to delete the record" message appears.
2. Click **OK** to delete the parameter.

NF FQDN

NRF screens the Fully Qualified Domain Name (FQDN) present in the request before allowing access to management service.

In NF FQDN, the attributes that can be modified are pattern, fqdn in NFProfile and fqdn in NFService.

Configuring NF FQDN Parameters

Following is the procedure to configure NF FQDN parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > NF FQDN**. Select **FQDN**.
2. Click **Edit** from the top right side to edit or update a NF FQDN parameter. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
4. Click **Save**.

Modifying NF FQDN

The user can add, edit or delete the NF FQDN.

Adding the NF FQDN

To add a NF FQDN:

1. Click **Add** from the top left of the NF FQDN table. The **Add NF FQDN** Screen appears.
2. Enter the attribute values. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
3. Click **Save**.

Editing the NF FQDN

To edit an existing NF FQDN:

1. Click **Edit** from the top left of the NF FQDN table. The **Edit NF FQDN** Screen appears.
2. Enter the attribute values.
3. Click **Save**.

Deleting the NF FQDN Parameters

To delete a NF FQDN Parameter:

1. Click **Delete** from the action items of NF FQDN Screen. The "Do you want to delete the record" message appears.
2. Click **OK** to delete the parameter.

NF IP Endpoint

NRF screens the IP endpoint/s present in the request before allowing access to management service.

Configuring NF IP Endpoint parameters

Following is the procedure to configure NF IP Endpoint parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > NF IP Endpoint**. Select **NF IP Endpoint**.
2. Click **Edit** from the top right side to edit or update a NF IP Endpoint parameters. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
4. Click **Save**.

Modifying NF IP Endpoint

The user can add, edit or delete the NF IP Endpoint.

Adding the NF IP Endpoint

To add a NF IP Endpoint:

1. Click **Add** from the top left of the NF IP Endpoint table. The **Add NF IP Endpoint** Screen appears.
2. Enter the attribute values. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
3. Click **Save**.

Editing the NF IP Endpoint

To edit an existing NF IP Endpoint:

1. Click **Edit** from the top left of the NF IP Endpoint table. The **Edit NF IP Endpoint** Screen appears.
2. Enter the attribute values. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
3. Click **Save**.

Deleting the NF IP Endpoint Parameters

To delete a NF IP Endpoint Parameters:

1. Click **Delete** from the action items of NF IP Endpoint Screen. The "*Do you want to delete the record*" message appears.
2. Click **OK** to delete the parameter.

NF Type Register

NRF screens the NF type present in the in coming service request.

Configuring NF IP Type Register parameters

Following is the procedure to configure NF IP Type Register parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > NF IP Type Register**. Select **NF IP Type Register**.
2. Click **Edit** from the top right side to edit or update a NF IP Type Register parameters. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
4. Click **Save**.

Modifying NF IP Type Register

The user can add, edit or delete the NF IP Type Register.

Adding the NF IP Type Register

To add a NF IP Type Register:

1. Click **Add** from the top left of the NF IP Type Register table. The **Add NF IP Type Register** Screen appears.
2. Enter the attribute values. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
3. Click **Save**.

Editing the NF IP Type Register

To edit an existing NF IP Type Register:

1. Click **Edit** from the top left of the NF IP Type Register table. The **Edit NF IP Type Register** Screen appears.
2. Enter the attribute values.
3. Click **Save**.

Deleting the NF IP Type Register Parameters

To delete a NF IP Type Register Parameters:

1. Click **Delete** from the action items of NF IP Type Register Screen. The "Do you want to delete the record" message appears.
2. Click **OK** to delete the parameter.

PLMN ID Parameters

NRF screens the PLMN Id present in the request before allowing access to management service.

Configuring PLMN ID Parameters

Following is the procedure to configure PLMN ID parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > NF IP Type Register PLMN ID**. Select **PLMN ID**.
2. Click **Edit** from the top right side to edit or update a PLMN ID parameters. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [Configuring NF Screening](#) for more information in parameter values and description.
4. Click **Save**.

Modifying PLMN ID

The user can add, edit or delete the PLMN ID.

Adding the PLMN ID

To add a PLMN ID:

1. Click **Add** from the top left of the PLMN ID table. The **Add PLMN ID** Screen appears.
2. Enter the attribute values. Refer to NRF User's Guide for more information in attribute values and description.

3. Click **Save**.

Editing the PLMN ID

To edit an existing PLMN ID:

1. Click **Edit** from the top left of the PLMN ID table. The **Edit PLMN ID** Screen appears.
2. Enter the attribute values.
3. Click **Save**.

Deleting the PLMN ID Parameters

To delete a PLMN ID Parameters:

1. Click **Delete** from the action items of PLMN ID Screen. The "Do you want to delete the record" message appears.
2. Click **OK** to delete the parameter.

System Options

This section explains the procedure to configure system options.

Configuring System Options parameters

Following is the procedure to configure system options parameters:

1. From the left navigation menu, navigate to **NRF > Screening Rules > System Options**. Select **System Options**.
2. Click **Edit** from the top right side to edit or update a system options parameters. The screen is enabled for modification.
3. Enter the values for the attributes as per the requirement. Refer to [General Configurations](#) for more information in parameter values and description.
4. Click **Save**.

Modifying NRF PLMN or SLF Error Responses

The user can add, edit or delete the NRF PLMN or SLF Error Responses parameters.

Adding NRF PLMN or SLF Error Responses

To add a NRF PLMN or SLF Error Responses parameters:

1. Click **Edit** from the top left of the System Options table. The **Edit System Options** Screen is enabled to edit.
2. Click **Add** from the top left of the NRF PLMN or SLF Error Responses table. The **Add** Screen appears.
3. Enter the attribute values. Refer to [General Configurations](#) for more information in parameter values and description.
4. Click **Save**.

Editing the System Options

To edit an existing System Options:

1. Click **Edit** from the top left of the System Options table. The **System Options** Screen is enabled to edit.
2. Click **Edit** from the NRF PLMN or SLF Error Responses table.
3. Enter the attribute values.
4. Click **Save**.

Deleting NRF PLMN or SLF Error Responses Parameters

To delete a NRF PLMN or SLF Error Responses Parameter:

1. Click **Edit** from the top left of the System Options table. The **System Options** Screen is enabled to edit.
2. Click **Delete** from the action items of System Options Screen. The "*Do you want to delete the record*" message appears.
3. Click **OK** to delete the parameter.
4. Click **Save**.

7

OCNRF Metrics, KPIs, and Alerts

OCNRF Metrics

This section includes information about Metrics for Oracle Communications Network Repository Function.

 **Note:**

Sample OCNRF dashboard for Grafana is delivered to the customer through OCNRF Custom Templates. Metrics and functions used to achieve KPI are covered in OCNRF Custom Templates. Refer to Oracle Help Center site for the information about OCNRF Custom Templates.

 **Note:**

In the above "NF Screening metrics" table, the dimension NF Type is a requester NF Type.

Dimensions Legend for the Metrics

The following table includes the details about the metrics dimensions:

Table 7-1 Dimensions Legend

Dimension	Details
Method	HTTP Method Name. For Example:- PUT, GET
Status	HTTP Status Code in response
Uri	URI defined to identify the Service Operation at Ingress Gateway
Node	Name of the kubernetes worker node on which microservice is running
NrfLevel	OCNRF Deployment Name by which OCNRF can be identified, it will be OCNRF Instance Id passed through helm
NfType	Types of Network Functions (NF)
NfInstanceId	Unique identity of the NF Instance sending request to OCNRF
OriginatorNfType	NF which originating the request
HttpStatuscode	HTTP Status Code
ServiceName	Name of the service instance (e.g. "nudm-sdm")
ServiceInstanceId	Unique ID of the service instance within a given NF Instance
UpdateType(Partial/Complete)	NF Update with PUT (Complete) or PATCH (Partial) methods

Table 7-1 (Cont.) Dimensions Legend

Dimension	Details
OperationType	Dimension is for NFSubscribe Service operation to tell if the request is to create or update the subscription
NF type	Dimension indicates the NF type which originating the request
NotificationEventType	This dimension indicates subscription request is for which event types. For example:- NF_REGISTERED, NF_DEREGISTERED and NF_PROFILE_CHANGED
TargetNfType	Dimension indicates request is for which target NF type
RequesterNfType	Dimension indicates the NF type which originated the request
ClientNfType	Dimension indicates the NF type which originating the request
TargetNfInstanceId	Dimension indicates the target NF Instance Id for NF Access Token
ClientNfInstanceId	Dimension indicates the client NF Instance Id for NF Access Token
RejectionReason	Dimension indicates the rejection reason for NF Access Token
SubscriptionIdType	Dimension indicates the Subscription Id type for which SLF query is recieved
GroupId	Dimension indicates the GroupId returned by SLF/UDR corresponding to SubscriptionId
BucketSize	Dimension indicates how many profiles are returned in the response of Discovery request. Range is not configurable. Possible values are 0-10, +Inf. According to NF profiles returned, corresponding bucket will be incremented by one. For example, if 2 profiles are returned, then bucket 2 will be incremented by one. Profiles getting returned more than 10 will fall in +Inf bucket.

Table 7-2 NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
1	Total number of ingress requests	Total number of requests received at OCNRF	apigateway_http_requests_total			

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
2	NF Register Success	Total number of successful NFRegister service operations at OCNRF	apigateway_http_responses_total{Status="201 CREATED",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method="PUT"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
3	NF Update Success (Complete Replacement)	Total number of successful NFUpdate service operations at OCNRF	apigateway_http_responses_total{Status="200 OK",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method="PUT"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
4	NF Update Success (Partial Replacement)	Total number of successful NFUpdate service operations at OCNRF	apigateway_http_responses_total{Status=~\".*2.*\",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method=\"PATCH\"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
5	NF List/Profile Retrieval Success	Total number of successful NF List/Profile retrieval service operations at OCNRF	apigateway_http_responses_total{Status=~\".*2.*\",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method=\"GET\"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
6	Access Token Success	Total number of successful Access Token service operations at OCNRF	apigateway_http_responses_total{Status="200 OK",Uri=~\".*/oauth2/token*\} }		Method- HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
7	NF De-register Success	Total number of successful service operations at OCNRF	apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~\".*nrf-nfm/v1/nf-instances.*\",Method="DELETE"} }		Method- HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
8	NF Subscribe Success	Total number of successful NFSubscribe service operations at OCNRF	apigateway_http_responses_total{Status="\201CREATED",Uri=~\".*nnrf-nfm/v1/subscriptions.*",Method="\POST"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
9	NF Unsubscribe Success	Total number of successful NFUnSubscribe service operations at OCNRF	apigateway_http_responses_total{Status="\204NO_CONTENT",Uri=~\".*nnrf-nfm/v1/subscriptions.*",Method="\DELETE"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
10	NF Discover Success	Total number of successful NFDISCOVER service operations at OCNRF	apigateway_http_responses_total{Status=~"2.*",Uri=~".*nnrf-disc/v1/nf-instances.*",Method="GET"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
11	4xx Responses (NF-Instances)	Total number of 4xx responses (NfRegister/NfUpdate/NfDelete/NfProfileRetrieval/NfListRetrieval)	apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
12	4xx Responses (Subscriptions)	Total number of 4xx responses (NfSubscribe/NfUnsubscribe)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*nnrf-nfm/v1/subscriptions.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
13	4xx Responses (Discovery)	Total number of 4xx responses (NfDiscover)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*nnrf-disc/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
14	4xx Responses (AccessToken)	Total number of 4xx responses(NfAccessToken)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*oauth2/token.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
15	5xx Responses (NF-Instances)	Total number of 5xx responses (NfRegister/ NfUpdate/ NfDelete/ NfProfileRetrieval /NfListRetrieval)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nrf-nfm/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
16	5xx Responses (Subscriptions)	Total number of 5xx responses (NfSubscribe/NfUnsubscribe)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nnrf-nfm/v1/subscriptions.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
17	5xx Responses (Discovery)	Total number of 5xx responses (NfDiscover)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nnrf-disc/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
18	5xx Responses (AccessToken)	Total number of 5xx responses(NfAccessToken)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*oauth2/token.*"		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
19	NfRegistrations Total	Number of Registration Requests received	ocnrf_nfRegister_rx_requests_total	NfRegistrations Total	NrfLevel NfInstanceId OriginatorNfType	
20	NfRegistrations Responses Total	Number of Registration Responses sent.	ocnrf_nfRegister_tx_responses_total	NfRegistrations Responses Total	NrfLevel NfInstanceId OriginatorNfType HttpStatusCode	
21	NfRegistrations Per Service Total	Number of Registrations received and processed successfully per Service.	ocnrf_nfRegister_rx_requests_success_perService_total	NfRegistrations Per Service [serviceName :- { serviceName }}, nfInstanceId :- {NfInstanceId}]	NrfLevel NfInstanceId ServiceName ServiceInstanceName	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
22	NFUpdates Total	Number of Update Requests received.	ocnrf_nfUpdate_rx_requests_total	NfUpdates Total	NrfLevel NfInstanceId OriginatorNfType UpdateType(Partial/Complete)	
23	NFUpdates Responses Total	Number of Update Responses sent.	ocnrf_nfUpdate_tx_requests_total	NfUpdates Responses Total	NrfLevel NfInstanceId OriginatorNfType UpdateType(Partial/Complete) HttpStatusCode	
24	NFUpdates Per Service Total	Number of NFUpdates received and processed successfully per Service.	ocnrf_nfUpdate_rx_requests_success_perService_total	NFUpdates Per Service [serviceName :- {{ serviceName }}, serviceInstanceId:- {{ServiceInstanceId}}]	NrfLevel, UpdateType=(Partial/Complete), NfInstanceId, ServiceName, ServiceInstanceId	
25	Heartbeat Requests Total	Number of Heartbeat Requests received	ocnrf_nfHeartbeat_rx_requests_total		NrfLevel NfInstanceId OriginatorNfType	
26	Heartbeat Responses Total	Number of Heartbeat Responses sent	ocnrf_nfHeartbeat_tx_responses_total		Nrflevel, NfInstanceId, OriginatorNfType, HttpStatusCode	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
27	NF De-Registration Requests Total	Number of De-registration requests received	ocnrf_nfDer egister_rx_requests_total		NrfLevel, NfInstanceld, OriginatorNf Type	
28	NF De-Registration Responses Total	Number of De-registration responses sent	ocnrf_nfDer egister_tx_responses_total		NrfLevel, NfInstanceld, OriginatorNf Type, HttpStatusCode	
29	NF De-Registrations Per Service Total	Number of De-registration requests received and process successfully per Service	ocnrf_nfDer egister_rx_requests_success_perService_total	NFDeregistration Per Service [servicename]	NrfLevel, ServiceName, ServiceInstanceld, NfInstanceld	
30	NF List Retrieval Requests Total	Number of NFListRetrieval requests received	ocnrf_nfList Retrieval_rx_requests_total		NrfLevel, OriginatorNf Type	
31	NF List Retrieval Responses Total	Number of NFListRetrieval responses sent	ocnrf_nfList Retrieval_tx_responses_total		NrfLevel, OriginatorNf Type, HttpStatusCode	
32	NF Profile Retrieval Requests Total	Number of NFProfileRetrieval requests received	ocnrf_nfProfileRetrieval_rx_requests_total		NrfLevel, NfInstanceld	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
33	NF Profile Retrieval Responses Total	Number of NFProfileRetrieval responses sent	ocnrf_nfProfileRetrieval_tx_responses_total		NrfLevel, NfInstanceId, HttpStatusCode	
34	Number of Heartbeats missed	Number of heartbeats missed.	ocnrf_heartbeat_missed_total		NrfLevel, NfType, NfInstanceId	
35	NF Status Subscribe Requests Total	Number of NfStatusSubscribe requests received	ocnrf_nfStatusSubscribe_rx_requests_total		NrfLevel, OriginatorNfType, OperationType	
36	NF Status Subscribe Responses Total	Number of NfStatusSubscribe responses sent	ocnrf_nfStatusSubscribe_tx_responses_total		NrfLevel, OriginatorNfType, HttpStatusCode, OperationType	
37	NF Status UnSubscribe Requests Total	Number of NfStatusUnsubscribe requests received	ocnrf_nfStatusUnsubscribe_rx_requests_total		NrfLevel, OriginatorNfType	
38	NF Status UnSubscribe Responses Total	Number of NfStatusUnsubscribe responses sent	ocnrf_nfStatusUnsubscribe_tx_responses_total		NrfLevel, OriginatorNfType, HttpStatusCode	
39	NF Status Notifications Requests Sent	Number of NfStatusNotify requests sent	ocnrf_nfStatusNotify_tx_requests_total		NrfLevel, NotificationEventType, TargetNfType	
40	NF Status Notifications Responses Received	Number of NfStatusNotify responses received	ocnrf_nfStatusNotify_rx_responses_total		NrfLevel, NotificationEventType, TargetNfType, HttpStatusCode	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
41	NF Status Notifications Requests Failed	Number of NfStatusNotify requests failed to sent out ocnrf_nfStatusNotify_requests_failed_total	ocnrf_nfStatusNotify_requests_failed_total		NrfLevel, NotificationEventType, TargetNfType	This metric indicates if Notification message failed to sent out from OCNRF (including Egress gateway too)
42	NfDiscover Requests Total	Number of NfDiscover Requests received	ocnrf_nfDiscover_rx_requests_total	NfDiscover Req [Target Nf :- {{ TargetNfType }}, RequesterNfType :- {{RequesterNfType}}]	NrfLevel, TargetNfType, RequesterNfType	
43	NfDiscover Responses Total	Number of NfDiscover responses sent	ocnrf_nfDiscover_tx_responses_total		NrfLevel, TargetNfType, RequesterNfType, HttpStatusCode	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
44	NFDiscover Per Service Total	Number of NFDiscover requests received and processed successfully per Service	ocnrf_nfDiscover_rx_requests_success_perService_total	NFDiscover Per Service [serviceName :- {{ serviceName }}]	NrfLevel, RequesterNfType, ServiceName	
45	Discovered profiles	Number of Profiles returned in discovery response. Depending on bucket size and corresponding value will tell how many profiles are returned in discovery response.	ocnrf_nfDiscover_profiles_discovered_count_total	Discovered profiles [TargetNfType :- {{TargetNfType}}, Bucket :- {{ Bucket }}]	NrfLevel, TargetNfType, BucketSize	
46	Active Registrations	Number of active registered NFs at any point of time	ocnrf_active_registrations_count	Active Registrations [NfType :- {{ NfType }}, NrfLevel :- {{ NrfLevel }}]	NfType, NrfLevel	

Table 7-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
47	Avg NRF Latency taken by NRF specific microservice	Time taken by NRF specific microservice to process the service operation(NfRegister/NfUpdate/NfDelete/NfProfileRetrieval/NfListRetrieval/NfHeartbeat/NfDiscover/NfSubscribe/NfUnsubscribe/NfAccessToken)	ocnrf_message_processing_time_seconds	Avg NRF Latency {{ ServiceOperation }} {{ OriginatorNftype }}	NrfLevel, OriginatorNfType, ServiceOperation	Latency calculated by this metric doesn't include time taken by OCNRF API gateway.
48	Avg NRF Latency	Time (in microseconds) to process an ingress request. Measured from when the request is received to when the response is sent	apigateway_request_latency_seconds	Avg NRF Latency		

In the above NRF Metrics table, 4xx and 5xx are the error codes in REST API.

Table 7-3 NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
1	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against NF FQDN screening list.	ocnrf_nfScreening_nfFqdn_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.

Table 7-3 (Cont.) NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
2	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against NF FQDN screening list.	ocnrf_nfScreening_nFqdn_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
3	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against NF IP endpointscreening list.	ocnrf_nfScreening_nflpEndpoint_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
4	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against NF IP endpoint screening list.	ocnrf_nfScreening_nflpEndpoint_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
5	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against Callback URIscreening list.	ocnrf_nfScreening_callbackUri_requestFailed_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.
6	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against Callback URI screening list.	ocnrf_nfScreening_callbackUri_requestRejected_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.
7	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against PLMN idscreening list.	ocnrf_nfScreening_plmnd_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
8	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against PLMN id screening list.	ocnrf_nfScreening_plmnd_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.

Table 7-3 (Cont.) NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
9	Total NF Requests for which Screening Failed	The total number of NFRegister requests rejected as NF type was not allowed to register with NRF.	ocnrf_nfScreening_nfTypeRegister_requestFailed_total	NFRegister	NRF level NF type	See Note 1 below of this table.
10	Total NF Requests Rejected due to Screening Failed	The total number of NFRegister requests for which screening failed against NF type screening list.	ocnrf_nfScreening_nfTypeRegister_requestRejected_total	NFRegister	NRF level NF type	See Note 1 below of this table.
11	NF Screening not applied Internal Error	The total number of times screening not applied due to internal error.	ocnrf_nfScreening_notApplied_InternalError_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.

NF Access token metrics

Table 7-4 NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
1	NF Access Token Request Received Total	The total number of access token requests received	ocnrf_accessToken_requests_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceld, ClientNfInstanceld, ServiceName, NrfLevel	

Table 7-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
2	NF Access Token Responses Sent Total	The total number of access token responses sent	ocnrf_accessToken_tx_responses_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, HttpStatusCode	
3	NF Access Token Request Rejected (ClientNotAuthorized)	Number of access token request for which client authorized failed RejectionReason = ClientNotAuthorized	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ClientNotAuthorized
4	NF Access Token Request Rejected (ProducerWithRequestedScopeNotFound)	Number of access token not granted because of no producer instance registered for service/s in the scope RejectionReason = ProducerWithRequestedScopeNotFound	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerWithRequestedScopeNotFound

Table 7-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
5	NF Access Token Request Rejected (ProducerWithRequestedNfInstanceIdNotFound)	Number of access token not granted because of no producer instance registered for No producer instance is registered at all for provided target Instance Id in request. RejectionReason = ProducerWithRequestedNfInstanceIdNotFound	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerWithRequestedNfInstanceIdNotFound
6	NF Access Token Request Rejected (InconsistentScope)	Number of access token not granted because services in the scope belong to different NF types. RejectionReason = InconsistentScope	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = InconsistentScope
7	NF Access Token Request Rejected (ConsumerNFTypeMismatch)	Number of access token not granted because consumer NF type in profile is not matching with the access token request. RejectionReason = ConsumerNFTypeMismatch	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ConsumerNFTypeMismatch

Table 7-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
8	NF Access Token Request Rejected (ProducerNFTypeMismatch)	Number of access token not granted because producer NF type in profile is not matching with the access token request. RejectionReason = ProducerNFTypeMismatch	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNFType, ClientNFType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerNFTypeMismatch
9	NF Access Token Request Rejected (InternalError)	Number of access token not granted because failure at NRF due to internal error. RejectionReason = InternalError	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNFType, ClientNFType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = InternalError

NRF-SLF specific metrics

Table 7-5 NRF-SLF specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
1	Discover Request Received For SLF Total	The total number of NF Discover request received for SLF	ocnrf_nfDiscover_ForSLF_rx_requests_total	NFDiscover	TargetNFType, NRFLevel

Table 7-5 (Cont.) NRF-SLF specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
2	Discover Response Sent For SLF Total	The total number of NF Discover responses sent for SLF	ocnrf_nfDiscover_ForSLF_tx_responses_total	NFDiscover	TargetNfType, NRFLevel, HttpStatusCode, RejectionReason Possible Rejection reasons:- RejectionReason = SLFCommunicationFailure RejectionReason = MandatoryParamsMissing RejectionReason = SLFConfigurationMissing RejectionReason = GroupIdNotFound RejectionReason = ErrorFromSLF RejectionReason = InternalError RejectionReason = *NotApplicable *NotApplicable is applicable for 2xx Status code
3	SLF Query Requests Sent Total	The total number of SLF query request sent	ocnrf_SLF_tx_requests_total	NFDiscover	TargetNfType, NRFLevel, SubscriptionIdType
4	SLF Query Responses Received Total	The total number of SLF query response received	ocnrf_SLF_rx_responses_total	NFDiscover	TargetNfType, NRFLevel, SubscriptionIdType, HttpStatusCode, GroupId

NRF Forwarding Metrics

Table 7-6 NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
1	NF Access Token Requests Forwarded Total	The total number of Access Token Request forwarded to Primary/ Secondary NRF	ocnrf_forward_accessToken_tx_requests_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel
2	NF Access Token Forwarded Responses Total	The total number of Access Token Responses for request forwarded to Primary/ Secondary NRF	ocnrf_forward_accessToken_rx_responses_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code
3	NF Profile Retrieval Requests Forwarded Total	The total number of Profile Retrieval Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nfp ProfileRetrieval_tx_requests_total	NFProfile Retrieval	NrfLevel, NfInstanceId

Table 7-6 (Cont.) NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
4	NF Profile Retrieval Forwarded Responses Total	The total number of Profile Retrieval Responses for Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf ProfileRetrieval_rx_responses_total	NFProfileRetrieval	NrfLevel, NrfInstanceId, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code
5	NF Status Subscribe Forwarded Requests Total	The total number of Status Subscribe Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf StatusSubscribe_tx_requests_total	NFStatusSubscribe, NFStatusUnsubscribe	NrfLevel, OriginatorNfType, OperationType
6	NF Status Subscribe Forwarded Responses Total	The total number of Responses for Status Subscribe Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf StatusSubscribe_rx_responses_total	NFStatusSubscribe, NFStatusUnsubscribe,	NrfLevel, OriginatorNfType, HttpStatusCode, OperationType, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code

Table 7-6 (Cont.) NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
7	NF Discovery Forwarded Requests Total	The total number of NF Discovery Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf Discover_tx_requests_total	NFDiscover	NrfLevel, TargetNfType, RequesterNfType
8	NF Discovery Forwarded Responses Total	The total number of Responses for NF Discovery Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf Discover_rx_responses_total	NFDiscover	NrfLevel, TargetNfType, RequesterNfType, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NrfCommunicationFailure • NrfForwardingConfigurationMissing • LoopDetected ErrorFromNrf *NotApplicable is applicable for 2xx Status code
9	Avg Latency for NRF Message Forwarding	Time taken by NRF specific microservice to forward the message to other Primary/ Secondary NRF with the service operation: (NFProfileRetrieval/NFDiscover/NFStatusSubscribe/NfStatusUnsubscribe/AccessToken)	ocnrf_forward_message_roundTripTime_seconds	NFStatusSubscribe, NFStatusUnsubscribe, NFProfileRetrieval, NFDiscover, AccessToken	NrfLevel, OriginatorNfType, ServiceOperation

OCNRF KPIs

This section includes information about KPIs for Oracle Communications Network Repository Function (OCNRF).

 **Note:**

Sample OCNRF dashboard for Grafana is delivered to the customer through OCNRF Custom Templates. Metrics and functions used to achieve KPI are already covered in OCNRF Custom Templates. Please view the Oracle Help Center site for the information about OCNRF Custom Templates.

Table 7-7 KPI Details

Sl. No#	KPI Name	KPI Details	Metric used for KPI	Service Operation	Response code
1	OCNRF Ingress Request	Rate of HTTP requestes recieved at OCNRF Ingress Gateway	apigateway_http_requests_total	All	Not Applicable
2	NF Register Success		sum(increase(apigateway_http_responses_total{Status="201 CREATED",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="PUT"}[5m]))	NFRegister	201
3	NF Update Success (Complete Replacement)		sum(increase(apigateway_http_responses_total{Status="200 OK",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="PUT"}[5m]))	NFUpdate	200
4	NF DeRegister Success		sum(increase(apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="DELETE"}[5m]))	NFDeregister	204
5	NF Subscribe Success		sum(increase(apigateway_http_responses_total{Status="201 CREATED",Uri=~".*nnrf-nfm/v1/subscriptions.*",Method="POST"}[5m]))	NFStat usSubscribe	201
6	NF Unsubscribe Success		sum(increase(apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~".*nnrf-nfm/v1/subscriptions.*",Method="DELETE"}[5m]))	NFStat usUnsubscribe	204

Table 7-7 (Cont.) KPI Details

Sl. No#	KPI Name	KPI Details	Metric used for KPI	Service Operation	Response code
7	NF Discover Success		sum(increase(apigateway_http_responses_total{Status=~"2.*",Uri=~".*nnrf-disc/v1/nf-instances.*",Method="GET"}[5m]))	NFDiscover	200
8	4xx Responses (NF-Instances)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}[5m]))	NFRegister/ NFUpdate/ NFDeregister	4xx
9	4xx Responses (Subscriptions)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/subscriptions.*"}[5m]))	NFStatusSubscribe/ NFStatusUnsubscribe	4xx
10	4xx Responses (Discovery)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-disc/v1/nf-instances.*"}[5m]))	NFDiscover	4xx
11	5xx Responses (NF-Instances)		sum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}[5m]))	NFRegister/ NFUpdate/ NFDeregister	5xx
12	5xx Responses (Subscriptions)		asum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-nfm/v1/subscriptions.*"}[5m]))	NFStatusSubscribe/ NFStatusUnsubscribe	5xx
13	5xx Responses (Discovery)		sum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-disc/v1/nf-instances.*"}[5m]))	NFDiscover	5xx

OCNRF Alerts

This section includes information about alerts for OCNRF.

Table 7-8 OCNRF Alert Details

Alert Name	Alert Description	Severity	Alert Details
OcnrfTrafficRateAboveCriticalThreshold	Alert if Ingress traffic reaches 95% of Max requests per second	Critical	Traffic Rate is above critical threshold.
OcnrfTrafficRateAboveMajorThreshold	Alert if Ingress traffic reaches 90% of Max requests per second	Major	Traffic Rate is above major threshold.
OcnrfTrafficRateAboveMinorThreshold	Alert if Ingress traffic reaches 80% of Max requests per second	Minor	Traffic Rate is above minor threshold.
OcnrfTransactionErrorRateAbove0.1Percent	Alert if error rate exceeds 0.1% of the total transactions	Warning	Transaction Error rate is above 0.1 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove1Percent	Alert if error rate exceeds 1% of the total transactions	Warning	Transaction Error rate is above 1 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove10Percent	Alert if error rate exceeds 10% of the total transactions	Minor	Transaction Error rate is above 10 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove25Percent	Alert if error rate exceeds 25% of the total transactions	Major	Transaction Error rate is above 25 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove50Percent	Alert if error rate exceeds 50% of the total transactions	Critical	Transaction Error rate is above 50 Percent of Total Transactions.
OcnrfActiveSubscribersBelowThreshold	Alert if the number of registered NFs is approaching minor threshold (The operator shall define the threshold as per requirement. Default range: 20-29)	Warning	The number of registered NFs is approaching minor threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.
OcnrfActiveSubscribersBelowMinorThreshold	Alert if the number of registered NFs is below minor threshold (The operator shall define the threshold as per requirement. Default range: 10-19)	Minor	The number of registered NFs is below minor threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.
OcnrfActiveSubscribersBelowMajorThreshold	Alert if the number of registered NFs is below major threshold (The operator shall define the threshold as per requirement. Default range: 2-9)	Major	The number of registered NFs is below major threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.

Table 7-8 (Cont.) OCNRF Alert Details

Alert Name	Alert Description	Severity	Alert Details
OcnrfActiveSubscribersBelowCriticalThreshold	Alert if the number of registered NFs is below critical threshold (The operator shall define the threshold as per requirement. Default range: < 2)	Critical	The number of registered NFs is below critical threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.

**Note:**

Max requests/sec in consideration is 1000/second

OCNRF Alert Configuration

Follow the steps below for OCNRF Alert configuration in Prometheus:

**Note:**

1. By default Namespace for OCNRF is `ocnrf` that must be update as per the deployment.
2. The `ocnrf-config-1.5.1.0.0.zip` file can be downloaded from OHC. Unzip the `ocnrf-config-1.5.1.0.0.zip` package after downloading to get `NrfAlertrules-1.5.1.yaml` file.

Procedure

1. Take Backup of current configuration map of Prometheus:

```
kubectl get configmaps _NAME_-server -o yaml -n _Namespace_ > /tmp/tempConfig.yaml
```

2. Check and add OCNRF Alert file name inside Prometheus configuration map:

```
sed -i '/etc\/config\/alertsrf\/d' /tmp/tempConfig.yaml
sed -i '/rule_files:/a\ \- /etc/config/alertsrf' /tmp/tempConfig.yaml
```

3. Update configuration map with updated file name of OCNRF alert file:

```
kubectl replace configmap _NAME_-server -f /tmp/tempConfig.yaml
```

4. Add OCNRF Alert rules in configuration map under file name of OCNRF alert file:

```
kubectl patch configmap _NAME_-server -n _Namespace_--type merge --patch
"$(cat ~/NrfAlertrules.yaml)"
```

 **Note:**

The Prometheus server takes an updated configuration map that is automatically reloaded after approximately 60 seconds. Refresh the Prometheus GUI to confirm that the OCNRF Alerts have been reloaded.

OCNRF Alert Config Details **Note:**

- By default the NameSpace is set to **ocnrf**. Update it according to the requirement.
- Update the number of registered NFs according to the requirement.
- Max request/sec in consideration is 1000 requests /second

Sample:

```
apiVersion: v1
data:
  alertsnrf: |
    groups:
      - name: OcnrfAlerts
        rules:
          - alert: OcnrfTrafficRateAboveMinorThreshold
            annotations:
              description: 'Ingress traffic Rate is above minor threshold i.e.
800 requests per second (current value is: {{ $value }})'
              summary: 'Traffic Rate is above 80 Percent of Max requests per
second(1000)'

```



```

labels:
  severity: Major
- alert: OcnrfTrafficRateAboveCriticalThreshold
  annotations:
    description: 'Ingress traffic Rate is above critical threshold
i.e. 950 requests per second (current value is: {{ $value }})'
    summary: 'Traffic Rate is above 95 Percent of Max requests per
second(1000)'
  expr:
sum(rate(apigateway_http_requests_total{app_kubernetes_io_name="ingressgate
way",kubernetes_namespace="ocnrf"}[2m])) >= 950
labels:
  severity: Critical
- alert: OcnrfTransactionErrorRateAbove0.1Percent
  annotations:
    description: 'Transaction Error rate is above 0.1 Percent of
Total Transactions (current value is {{ $value }})'
    summary: 'Transaction Error Rate detected above 0.1 Percent of
Total Transactions'
  expr: (sum(rate(apigateway_http_responses_total{Status!
~"2.*",app_kubernetes_io_name="ingressgateway",kubernetes_namespace="ocnrf"
}[2m]) or (up * 0 ) ) ) /
sum(rate(apigateway_http_responses_total{app_kubernetes_io_name="ingressgat
eway",kubernetes_namespace="ocnrf"}[2m])) * 100 >= 0.1 < 1
labels:
  severity: Warning
- alert: OcnrfTransactionErrorRateAbove1Percent
  annotations:
    description: 'Transaction Error rate is above 1 Percent of Total
Transactions (current value is {{ $value }})'
    summary: 'Transaction Error Rate detected above 1 Percent of
Total Transactions'
  expr: (sum(rate(apigateway_http_responses_total{Status!
~"2.*",app_kubernetes_io_name="ingressgateway",kubernetes_namespace="ocnrf"
}[2m]) or (up * 0 ) ) ) /
sum(rate(apigateway_http_responses_total{app_kubernetes_io_name="ingressgat
eway",kubernetes_namespace="ocnrf"}[2m])) * 100 >= 1 < 10
labels:
  severity: Warning
- alert: OcnrfTransactionErrorRateAbove10Percent
  annotations:
    description: 'Transaction Error rate is above 10 Percent of
Total Transactions (current value is {{ $value }})'
    summary: 'Transaction Error Rate detected above 10 Percent of
Total Transactions'
  expr: (sum(rate(apigateway_http_responses_total{Status!
~"2.*",app_kubernetes_io_name="ingressgateway",kubernetes_namespace="ocnrf"
}[2m]) or (up * 0 ) ) ) /
sum(rate(apigateway_http_responses_total{app_kubernetes_io_name="ingressgat
eway",kubernetes_namespace="ocnrf"}[2m])) * 100 >= 10 < 25
labels:
  severity: Minor
- alert: OcnrfTransactionErrorRateAbove25Percent
  annotations:
    description: 'Transaction Error Rate detected above 25 Percent

```

```

of Total Transactions (current value is {{ $value }})'
    summary: 'Transaction Error Rate detected above 25 Percent of
Total Transactions'
    expr: (sum(rate(apigateway_http_responses_total{Status!
~"2.*",app_kubernetes_io_name="ingressgateway",kubernetes_namespace="ocnrf"
}[2m]) or (up * 0 ) ) ) /
sum(rate(apigateway_http_responses_total{app_kubernetes_io_name="ingressgat
eway",kubernetes_namespace="ocnrf"}[2m])) * 100 >= 25 < 50
    labels:
        severity: Major
- alert: OcnrfTransactionErrorRateAbove50Percent
    annotations:
        description: 'Transaction Error Rate detected above 50 Percent
of Total Transactions (current value is {{ $value }})'
        summary: 'Transaction Error Rate detected above 50 Percent of
Total Transactions'
        expr: (sum(rate(apigateway_http_responses_total{Status!
~"2.*",app_kubernetes_io_name="ingressgateway",kubernetes_namespace="ocnrf"
}[2m]) or (up * 0 ) ) ) /
sum(rate(apigateway_http_responses_total{app_kubernetes_io_name="ingressgat
eway",kubernetes_namespace="ocnrf"}[2m])) * 100 >= 50
        labels:
            severity: Critical
# Operator shall configure the threshold values with respect to the
number of NFs expected within the network
- alert: OcnrfActiveSubscribersBelowCriticalThreshold
    annotations:
        description: 'The number of registered NFs detected below
critical threshold (current value is: {{ $value }})'
        summary: 'The number of registered NFs detected below critical
threshold.'
    expr:
ocnrf_active_registrations_count{app_kubernetes_io_name="nrfauditor",kubern
etes_namespace="ocnrf"} >= 0 < 2
        labels:
            severity: Critical
- alert: OcnrfActiveSubscribersBelowMajorThreshold
    annotations:
        description: 'The number of registered NFs detected below major
threshold (current value is: {{ $value }})'
        summary: 'The number of registered NFs detected below major
threshold.'
    expr:
ocnrf_active_registrations_count{app_kubernetes_io_name="nrfauditor",kubern
etes_namespace="ocnrf"} >= 2 < 10
        labels:
            severity: Major
- alert: OcnrfActiveSubscribersBelowMinorThreshold
    annotations:
        description: 'The number of registered NFs detected below minor
threshold (current value is: {{ $value }})'
        summary: 'The number of registered NFs detected below minor
threshold.'
    expr:
ocnrf_active_registrations_count{app_kubernetes_io_name="nrfauditor",kubern

```

```
etes_namespace="ocnrf"} >= 10 < 20
  labels:
    severity: Minor
  - alert: OcnrfActiveSubscribersBelowThreshold
    annotations:
      description: 'The number of registered NFs is approaching minor
threshold (current value is: {{ $value }})'
      summary: 'The number of registered NFs approaching minor
threshold.'
    expr:
ocnrf_active_registrations_count{app_kubernetes_io_name="nrfauditor",kubern
etes_namespace="ocnrf"} >= 20 < 30
  labels:
    severity: Warning
```

8

OCNRF Metrics

This section includes information about Metrics for Oracle Communications Network Repository Function.

 **Note:**

Sample OCNRF dashboard for Grafana is delivered to the customer through OCNRF Custom Templates. Metrics and functions used to achieve KPI are covered in OCNRF Custom Templates. Refer to Oracle Help Center site for the information about OCNRF Custom Templates.

 **Note:**

In the above "NF Screening metrics" table, the dimension NF Type is a requester NF Type.

Dimensions Legend for the Metrics

The following table includes the details about the metrics dimensions:

Table 8-1 Dimensions Legend

Dimension	Details
Method	HTTP Method Name. For Example:- PUT, GET
Status	HTTP Status Code in response
Uri	URI defined to identify the Service Operation at Ingress Gateway
Node	Name of the kubernetes worker node on which microservice is running
NrfLevel	OCNRF Deployment Name by which OCNRF can be identified, it will be OCNRF Instance Id passed through helm
NfType	Types of Network Functions (NF)
NfInstanceId	Unique identity of the NF Instance sending request to OCNRF
OriginatorNfType	NF which originating the request
HttpStatuscode	HTTP Status Code
ServiceName	Name of the service instance (e.g. "nudm-sdm")
ServiceInstanceId	Unique ID of the service instance within a given NF Instance
UpdateType(Partial/Complete)	NF Update with PUT (Complete) or PATCH (Partial) methods
OperationType	Dimension is for NFSubscribe Service operation to tell if the request is to create or update the subscription
NF type	Dimension indicates the NF type which originating the request

Table 8-1 (Cont.) Dimensions Legend

Dimension	Details
NotificationEventType	This dimension indicates subscription request is for which event types. For example:- NF_REGISTERED, NF_DEREGISTERED and NF_PROFILE_CHANGED
TargetNfType	Dimension indicates request is for which target NF type
RequesterNfType	Dimension indicates the NF type which originated the request
ClientNfType	Dimension indicates the NF type which originating the request
TargetNfInstanceId	Dimension indicates the target NF Instance Id for NF Access Token
ClientNfInstanceId	Dimension indicates the client NF Instance Id for NF Access Token
RejectionReason	Dimension indicates the rejection reason for NF Access Token
SubscriptionIdType	Dimension indicates the Subscription Id type for which SLF query is recieved
GroupId	Dimension indicates the GroupId returned by SLF/UDR corresponding to SubscriptionId
BucketSize	Dimension indicates how many profiles are returned in the response of Discovery request. Range is not configurable. Possible values are 0-10, +Inf. According to NF profiles returned, corresponding bucket will be incremented by one. For example, if 2 profiles are returned, then bucket 2 will be incremented by one. Profiles getting returned more than 10 will fall in +Inf bucket.

Table 8-2 NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
1	Total number of ingress requests	Total number of requests received at OCNRF	apigateway_http_requests_total			

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
2	NF Register Success	Total number of successful NFRegister service operations at OCNRF	apigateway_http_responses_total{Status="201 CREATED",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method="PUT"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
3	NF Update Success (Complete Replacement)	Total number of successful NFUpdate service operations at OCNRF	apigateway_http_responses_total{Status="200 OK",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method="PUT"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
4	NF Update Success (Partial Replacement)	Total number of successful NFUpdate service operations at OCNRF	apigateway_http_responses_total{Status=~\".*2.*\",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method=\"PATCH\"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
5	NF List/Profile Retrieval Success	Total number of successful NF List/Profile retrieval service operations at OCNRF	apigateway_http_responses_total{Status=~\".*2.*\",Uri=~\".*nnrf-nfm/v1/nf-instances.*\",Method=\"GET\"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
6	Access Token Success	Total number of successful Access Token service operations at OCNRF	apigateway_http_responses_total{Status="200 OK",Uri=~\".*/oauth2/token*\} }		Method- HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
7	NF De-register Success	Total number of successful service operations at OCNRF	apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~\".*nrf-nfm/v1/nf-instances.*\",Method="DELETE"} }		Method- HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
8	NF Subscribe Success	Total number of successful NFSubscribe service operations at OCNRF	apigateway_http_responses_total{Status="201 CREATED",Uri=~\".*nnrf-nfm/v1/subscriptions.*\",Method="POST"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
9	NF Unsubscribe Success	Total number of successful NFUnSubscribe service operations at OCNRF	apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~\".*nnrf-nfm/v1/subscriptions.*\",Method="DELETE"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
10	NF Discover Success	Total number of successful NFDISCOVER service operations at OCNRF	apigateway_http_responses_total{Status=~"2.*",Uri=~".*nnrf-disc/v1/nf-instances.*",Method=~"GET"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the Kubernetes worker node on which micro-service is running	
11	4xx Responses (NF-Instances)	Total number of 4xx responses (NfRegister/NfUpdate/NfDelete/NfProfileRetrieval/NfListRetrieval)	apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
12	4xx Responses (Subscriptions)	Total number of 4xx responses (NfSubscribe/NfUnsubscribe)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*nnrf-nfm/v1/subscriptions.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
13	4xx Responses (Discovery)	Total number of 4xx responses (NfDiscover)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*nnrf-disc/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
14	4xx Responses (AccessToken)	Total number of 4xx responses(NfAccessToken)	apigateway_http_responses_total{Status=~"4.*", Uri=~".*oauth2/token.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
15	5xx Responses (NF-Instances)	Total number of 5xx responses (NfRegister/ NfUpdate/ NfDelete/ NfProfileRetrieval /NfListRetrieval)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nrf-nfm/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
16	5xx Responses (Subscriptions)	Total number of 5xx responses (NfSubscribe/NfUnsubscribe)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nnrf-nfm/v1/subscriptions.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
17	5xx Responses (Discovery)	Total number of 5xx responses (NfDiscover)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*nnrf-disc/v1/nf-instances.*"}		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
18	5xx Responses (AccessToken)	Total number of 5xx responses(NfAccessToken)	apigateway_http_responses_total{Status=~"5.*", Uri=~".*oauth2/token.*"		Method-HTTP method of request Status - status code in HTTP response Uri- URI from the request line Node-Name of the kubernetes worker node on which microservice is running	
19	NfRegistrations Total	Number of Registration Requests received	ocnrf_nfRegister_rx_requests_total	NfRegistrations Total	NrfLevel NfInstanceId OriginatorNfType	
20	NfRegistrations Responses Total	Number of Registration Responses sent.	ocnrf_nfRegister_tx_responses_total	NfRegistrations Responses Total	NrfLevel NfInstanceId OriginatorNfType HttpStatusCode	
21	NfRegistrations Per Service Total	Number of Registrations received and processed successfully per Service.	ocnrf_nfRegister_rx_requests_successes_perService_total	NfRegistrations Per Service [serviceName :- {{ serviceName }}, nfInstanceId :- {{NfInstanceId}}]	NrfLevel NfInstanceId ServiceName ServiceInstanceId	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
22	NFUpdates Total	Number of Update Requests received.	ocnrf_nfUpdate_rx_requests_total	NfUpdates Total	NrfLevel NfInstanceId OriginatorNfType UpdateType(Partial/Complete)	
23	NFUpdates Responses Total	Number of Update Responses sent.	ocnrf_nfUpdate_tx_requests_total	NfUpdates Responses Total	NrfLevel NfInstanceId OriginatorNfType UpdateType(Partial/Complete) HttpStatusCode	
24	NFUpdates Per Service Total	Number of NFUpdates received and processed successfully per Service.	ocnrf_nfUpdate_rx_requests_success_perService_total	NFUpdates Per Service [serviceName :- {{ serviceName }}, serviceInstanceId:- {{ServiceInstanceId}}]	NrfLevel, UpdateType=(Partial/Complete), NfInstanceId, ServiceName, ServiceInstanceId	
25	Heartbeat Requests Total	Number of Heartbeat Requests received	ocnrf_nfHeartbeat_rx_requests_total		NrfLevel NfInstanceId OriginatorNfType	
26	Heartbeat Responses Total	Number of Heartbeat Responses sent	ocnrf_nfHeartbeat_tx_responses_total		Nrflevel, NfInstanceId, OriginatorNfType, HttpStatusCode	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
27	NF De-Registration Requests Total	Number of De-registration requests received	ocnrf_nfDer egister_rx_requests_total		NrfLevel, NfInstanceld, OriginatorNf Type	
28	NF De-Registration Responses Total	Number of De-registration responses sent	ocnrf_nfDer egister_tx_responses_total		NrfLevel, NfInstanceld, OriginatorNf Type, HttpStatusCode	
29	NF De-Registrations Per Service Total	Number of De-registration requests received and process successfully per Service	ocnrf_nfDer egister_rx_requests_success_perService_total	NFDeregistration Per Service [serviceName], servicel nstanceId:- {{ServiceInstanceld}}]	NrfLevel, ServiceName, ServiceInstanceld, NfInstanceld	
30	NF List Retrieval Requests Total	Number of NFListRetrieval requests received	ocnrf_nfList Retrieval_rx_requests_total		NrfLevel, OriginatorNf Type	
31	NF List Retrieval Responses Total	Number of NFListRetrieval responses sent	ocnrf_nfList Retrieval_tx_responses_total		NrfLevel, OriginatorNf Type, HttpStatusCode	
32	NF Profile Retrieval Requests Total	Number of NFProfileRetrieval requests received	ocnrf_nfProfileRetrieval_rx_requests_total		NrfLevel, NfInstanceld	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
33	NF Profile Retrieval Responses Total	Number of NFProfileRetrieval responses sent	ocnrf_nfProfileRetrieval_tx_responses_total		NrfLevel, NfInstanceId, HttpStatusCode	
34	Number of Heartbeats missed	Number of heartbeats missed.	ocnrf_heartbeat_missed_total		NrfLevel, NfType, NfInstanceId	
35	NF Status Subscribe Requests Total	Number of NfStatusSubscribe requests received	ocnrf_nfStatusSubscribe_rx_requests_total		NrfLevel, OriginatorNfType, OperationType	
36	NF Status Subscribe Responses Total	Number of NfStatusSubscribe responses sent	ocnrf_nfStatusSubscribe_tx_responses_total		NrfLevel, OriginatorNfType, HttpStatusCode, OperationType	
37	NF Status UnSubscribe Requests Total	Number of NfStatusUnsubscribe requests received	ocnrf_nfStatusUnsubscribe_rx_requests_total		NrfLevel, OriginatorNfType	
38	NF Status UnSubscribe Responses Total	Number of NfStatusUnsubscribe responses sent	ocnrf_nfStatusUnsubscribe_tx_responses_total		NrfLevel, OriginatorNfType, HttpStatusCode	
39	NF Status Notifications Requests Sent	Number of NfStatusNotify requests sent	ocnrf_nfStatusNotify_tx_requests_total		NrfLevel, NotificationEventType, TargetNfType	
40	NF Status Notifications Responses Received	Number of NfStatusNotify responses received	ocnrf_nfStatusNotify_rx_responses_total		NrfLevel, NotificationEventType, TargetNfType, HttpStatusCode	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
41	NF Status Notifications Requests Failed	Number of NfStatusNotify requests failed to sent out ocnrf_nfStatusNotify_requests_failed_total	ocnrf_nfStatusNotify_requests_failed_total		NrfLevel, NotificationEventType, TargetNfType	This metric indicates if Notification message failed to sent out from OCNRF (including Egress gateway too)
42	NfDiscover Requests Total	Number of NfDiscover Requests received	ocnrf_nfDiscover_rx_requests_total	NfDiscover Req [Target Nf :- {{ TargetNfType }}, RequesterNfType :- {{RequesterNfType}}]	NrfLevel, TargetNfType, RequesterNfType	
43	NfDiscover Responses Total	Number of NfDiscover responses sent	ocnrf_nfDiscover_tx_responses_total		NrfLevel, TargetNfType, RequesterNfType, HttpStatusCode	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
44	NFDiscover Per Service Total	Number of NFDiscover requests received and processed successfully per Service	ocnrf_nfDiscover_rx_requests_success_perService_total	NFDiscover Per Service [serviceName :- {{ serviceName }}]	NrfLevel, RequesterNfType, ServiceName	
45	Discovered profiles	Number of Profiles returned in discovery response. Depending on bucket size and corresponding value will tell how many profiles are returned in discovery response.	ocnrf_nfDiscover_profiles_discovered_count_total	Discovered profiles [TargetNfType :- {{TargetNfType}}, Bucket :- {{ Bucket }}]	NrfLevel, TargetNfType, BucketSize	
46	Active Registrations	Number of active registered NFs at any point of time	ocnrf_active_registrations_count	Active Registrations [NfType :- {{ NfType }}, NrfLevel :- {{ NrfLevel }}]	NfType, NrfLevel	

Table 8-2 (Cont.) NRF Common Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Recommended legend to see dimension level data (as applicable)	Dimensions	Notes
47	Avg NRF Latency taken by NRF specific microservice	Time taken by NRF specific microservice to process the service operation(NfRegister/NfUpdate/NfDelete/NfProfileRetrieval/NfListRetrieval/NfHeartbeat/NfDiscover/NfSubscribe/NfUnsubscribe/NfAccessToken)	ocnrf_message_processing_time_seconds	Avg NRF Latency {{ ServiceOperation }} {{ OriginatorNftype }}	NrfLevel, OriginatorNfType, ServiceOperation	Latency calculated by this metric doesn't include time taken by OCNRF API gateway.
48	Avg NRF Latency	Time (in microseconds) to process an ingress request. Measured from when the request is received to when the response is sent	apigateway_request_latency_seconds	Avg NRF Latency		

In the above NRF Metrics table, 4xx and 5xx are the error codes in REST API.

Table 8-3 NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
1	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against NF FQDN screening list.	ocnrf_nfScreening_nfFqdn_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.

Table 8-3 (Cont.) NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
2	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against NF FQDN screening list.	ocnrf_nfScreening_nFqdn_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
3	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against NF IP endpointscreening list.	ocnrf_nfScreening_nflpEndpoint_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
4	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against NF IP endpoint screening list.	ocnrf_nfScreening_nflpEndpoint_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
5	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against Callback URIscreening list.	ocnrf_nfScreening_callbackUri_requestFailed_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.
6	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against Callback URI screening list.	ocnrf_nfScreening_callbackUri_requestRejected_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.
7	Total NF Requests for which Screening Failed	The total number of requests for which screening failed against PLMN idscreening list.	ocnrf_nfScreening_plmnId_requestFailed_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.
8	Total NF Requests Rejected due to Screening Failed	The total number of requests rejected because screening failed against PLMN id screening list.	ocnrf_nfScreening_plmnId_requestRejected_total	NFRegister, NFUpdate	NRF level NF type	See Note 1 below of this table.

Table 8-3 (Cont.) NF Screening specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
9	Total NF Requests for which Screening Failed	The total number of NFRegister requests rejected as NF type was not allowed to register with NRF.	ocnrf_nfScreening_nfTypeRegister_requestFailed_total	NFRegister	NRF level NF type	See Note 1 below of this table.
10	Total NF Requests Rejected due to Screening Failed	The total number of NFRegister requests for which screening failed against NF type screening list.	ocnrf_nfScreening_nfTypeRegister_requestRejected_total	NFRegister	NRF level NF type	See Note 1 below of this table.
11	NF Screening not applied Internal Error	The total number of times screening not applied due to internal error.	ocnrf_nfScreening_notApplied_InternalError_total	NFRegister, NFUpdate, NFSubscribe	NRF level NF type	See Note 1 below of this table.

NF Access token metrics**Table 8-4 NF Access token metrics**

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
1	NF Access Token Request Received Total	The total number of access token requests received	ocnrf_accessToken_requests_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceld, ClientNfInstanceld, ServiceName, NrfLevel	

Table 8-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
2	NF Access Token Responses Sent Total	The total number of access token responses sent	ocnrf_accessToken_tx_responses_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, HttpStatusCode	
3	NF Access Token Request Rejected (ClientNotAuthorized)	Number of access token request for which client authorized failed RejectionReason = ClientNotAuthorized	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ClientNotAuthorized
4	NF Access Token Request Rejected (ProducerWithRequestedScopeNotFound)	Number of access token not granted because of no producer instance registered for service/s in the scope RejectionReason = ProducerWithRequestedScopeNotFound	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstancelId, ClientNfInstancelId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerWithRequestedScopeNotFound

Table 8-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
5	NF Access Token Request Rejected (ProducerWithRequestedNfInstanceIdNotFound)	Number of access token not granted because of no producer instance registered for No producer instance is registered at all for provided target Instance Id in request. RejectionReason = ProducerWithRequestedNfInstanceIdNotFound	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerWithRequestedNfInstanceIdNotFound
6	NF Access Token Request Rejected (InconsistentScope)	Number of access token not granted because services in the scope belong to different NF types. RejectionReason = InconsistentScope	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = InconsistentScope
7	NF Access Token Request Rejected (ConsumerNFTypeMismatch)	Number of access token not granted because consumer NF type in profile is not matching with the access token request. RejectionReason = ConsumerNFTypeMismatch	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ConsumerNFTypeMismatch

Table 8-4 (Cont.) NF Access token metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions	Notes
8	NF Access Token Request Rejected (ProducerNFTypeMismatch)	Number of access token not granted because producer NF type in profile is not matching with the access token request. RejectionReason = ProducerNFType Mismatch	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNFType, ClientNFType, TargetNfInstanceld, ClientNfInstanceld, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = ProducerNFTypeMismatch
9	NF Access Token Request Rejected (InternalError)	Number of access token not granted because failure at NRF due to internal error. RejectionReason = InternalError	ocnrf_accessToken_tx_rejected_total	Access Token	TargetNFType, ClientNFType, TargetNfInstanceld, ClientNfInstanceld, ServiceName, NrfLevel, RejectionReason, HttpStatusCode	RejectionReason = InternalError

NRF-SLF specific metrics

Table 8-5 NRF-SLF specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
1	Discover Request Received For SLF Total	The total number of NF Discover request received for SLF	ocnrf_nfDiscover_ForSLF_rx_requests_total	NFDiscover	TargetNFType, NRFLevel

Table 8-5 (Cont.) NRF-SLF specific metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
2	Discover Response Sent For SLF Total	The total number of NF Discover responses sent for SLF	ocnrf_nfDiscover_ForSLF_tx_responses_total	NFDiscover	TargetNfType, NRFLevel, HttpStatusCode, RejectionReason Possible Reject reasons:- RejectionReason = SLFCommunicationFailure RejectionReason = MandatoryParamsMissing RejectionReason = SLFConfigurationMissing RejectionReason = GroupIdNotFound RejectionReason = ErrorFromSLF RejectionReason = InternalError RejectionReason = *NotApplicable *NotApplicable is applicable for 2xx Status code
3	SLF Query Requests Sent Total	The total number of SLF query request sent	ocnrf_SLF_tx_requests_total	NFDiscover	TargetNfType, NRFLevel, SubscriptionIdType
4	SLF Query Responses Received Total	The total number of SLF query response received	ocnrf_SLF_rx_responses_total	NFDiscover	TargetNfType, NRFLevel, SubscriptionIdType, HttpStatusCode, GroupId

NRF Forwarding Metrics

Table 8-6 NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
1	NF Access Token Requests Forwarded Total	The total number of Access Token Request forwarded to Primary/ Secondary NRF	ocnrf_forward_accessToken_tx_requests_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel
2	NF Access Token Forwarded Responses Total	The total number of Access Token Responses for request forwarded to Primary/ Secondary NRF	ocnrf_forward_accessToken_rx_responses_total	Access Token	TargetNfType, ClientNfType, TargetNfInstanceId, ClientNfInstanceId, ServiceName, NrfLevel, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code
3	NF Profile Retrieval Requests Forwarded Total	The total number of Profile Retrieval Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nfpfileRetrieval_tx_requests_total	NFProfileRetrieval	NrfLevel, NfInstanceId

Table 8-6 (Cont.) NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
4	NF Profile Retrieval Forwarded Responses Total	The total number of Profile Retrieval Responses for Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf ProfileRetrieval_rx_responses_total	NFProfileRetrieval	NrfLevel, NrfInstanceId, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code
5	NF Status Subscribe Forwarded Requests Total	The total number of Status Subscribe Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf StatusSubscribe_tx_requests_total	NFStatusSubscribe, NFStatusUnsubscribe	NrfLevel, OriginatorNfType, OperationType
6	NF Status Subscribe Forwarded Responses Total	The total number of Responses for Status Subscribe Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf StatusSubscribe_rx_responses_total	NFStatusSubscribe, NFStatusUnsubscribe,	NrfLevel, OriginatorNfType, HttpStatusCode, OperationType, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NRFCommunicationFailure • ErrorFromNRF • NRFForwardingConfigurationMissing • LoopDetected *NotApplicable is applicable for 2xx Status code


Table 8-6 (Cont.) NRF Forwarding Metrics

Sl. No#	Metric Name	Metric Details	Metric filter	Service Operation	Dimensions
7	NF Discovery Forwarded Requests Total	The total number of NF Discovery Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf Discover_tx_requests_total	NFDiscover	NrfLevel, TargetNfType, RequesterNfType
8	NF Discovery Forwarded Responses Total	The total number of Responses for NF Discovery Request forwarded to Primary/ Secondary NRF	ocnrf_forward_nf Discover_rx_responses_total	NFDiscover	NrfLevel, TargetNfType, RequesterNfType, HttpStatusCode, RejectionReason RejectionReason: <ul style="list-style-type: none"> • InternalError • NrfCommunicationFailure • NrfForwardingConfigurationMissing • LoopDetected ErrorFromNrf *NotApplicable is applicable for 2xx Status code
9	Avg Latency for NRF Message Forwarding	Time taken by NRF specific microservice to forward the message to other Primary/ Secondary NRF with the service operation: (NFProfileRetrieval/NFDiscover/NFStatusSubscribe/NfStatusUnsubscribe/AccessToken)	ocnrf_forward_message_roundTripTime_seconds	NFStatusSubscribe, NFStatusUnsubscribe, NFProfileRetrieval, NFDiscover, AccessToken	NrfLevel, OriginatorNfType, ServiceOperation

9

OCNRF KPIs

This section includes information about KPIs for Oracle Communications Network Repository Function (OCNRF).

 **Note:**

Sample OCNRF dashboard for Grafana is delivered to the customer through OCNRF Custom Templates. Metrics and functions used to achieve KPI are already covered in OCNRF Custom Templates. Please view the Oracle Help Center site for the information about OCNRF Custom Templates.

Table 9-1 KPI Details

Sl. No#	KPI Name	KPI Details	Metric used for KPI	Service Operation	Response code
1	OCNRF Ingress Request	Rate of HTTP requestes recieved at OCNRF Ingress Gateway	apigateway_http_requests_total	All	Not Applicable
2	NF Register Success		sum(increase(apigateway_http_responses_total{Status="201 CREATED",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="PUT"})[5m]))	NFRegister	201
3	NF Update Success (Complete Replacement)		sum(increase(apigateway_http_responses_total{Status="200 OK",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="PUT"})[5m]))	NFUpdate	200
4	NF DeRegister Success		sum(increase(apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~".*nnrf-nfm/v1/nf-instances.*",Method="DELETE"})[5m]))	NFDeRegister	204

Table 9-1 (Cont.) KPI Details

Sl. No#	KPI Name	KPI Details	Metric used for KPI	Service Operation	Response code
5	NF Subscribe Success		sum(increase(apigateway_http_responses_total{Status="201 CREATED",Uri=~".*nnrf-nfm/v1/subscriptions.*",Method="POST"}[5m]))	NFStat usSubscribe	201
6	NF Unsubscribe Success		sum(increase(apigateway_http_responses_total{Status="204 NO_CONTENT",Uri=~".*nnrf-nfm/v1/subscriptions.*",Method="DELETE"}[5m]))	NFStat usUnsubscribe	204
7	NF Discover Success		sum(increase(apigateway_http_responses_total{Status=~"2.*",Uri=~".*nnrf-disc/v1/nf-instances.*",Method="GET"}[5m]))	NFDisc over	200
8	4xx Responses (NF-Instances)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}[5m]))	NFRegi ster/ NFUpd ate/ NFDere gister	4xx
9	4xx Responses (Subscriptions)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-nfm/v1/subscriptions.*"}[5m]))	NFStat usSubscribe/ NFStat usUnsubscribe	4xx
10	4xx Responses (Discovery)		sum(increase(apigateway_http_responses_total{Status=~"4.*",Uri=~".*nnrf-disc/v1/nf-instances.*"}[5m]))	NFDisc over	4xx
11	5xx Responses (NF-Instances)		sum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-nfm/v1/nf-instances.*"}[5m]))	NFRegi ster/ NFUpd ate/ NFDere gister	5xx
12	5xx Responses (Subscriptions)		asum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-nfm/v1/subscriptions.*"}[5m]))	NFStat usSubscribe/ NFStat usUnsubscribe	5xx

Table 9-1 (Cont.) KPI Details

Sl. No#	KPI Name	KPI Details	Metric used for KPI	Service Operation	Response code
13	5xx Responses (Discovery)		sum(increase(apigateway_http_responses_total{Status=~"5.*",Uri=~".*nnrf-disc/v1/nf-instances.*"}[5m]))	NFDiscover	5xx

10

OCNRF Alerts

This section includes information about alerts for OCNRF.

Table 10-1 OCNRF Alert Details

Alert Name	Alert Description	Severity	Alert Details
OcnrfTrafficRateAboveCriticalThreshold	Alert if Ingress traffic reaches 95% of Max requests per second	Critical	Traffic Rate is above critical threshold.
OcnrfTrafficRateAboveMajorThreshold	Alert if Ingress traffic reaches 90% of Max requests per second	Major	Traffic Rate is above major threshold.
OcnrfTrafficRateAboveMinorThreshold	Alert if Ingress traffic reaches 80% of Max requests per second	Minor	Traffic Rate is above minor threshold.
OcnrfTransactionErrorRateAbove0.1Percent	Alert if error rate exceeds 0.1% of the total transactions	Warning	Transaction Error rate is above 0.1 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove1Percent	Alert if error rate exceeds 1% of the total transactions	Warning	Transaction Error rate is above 1 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove10Percent	Alert if error rate exceeds 10% of the total transactions	Minor	Transaction Error rate is above 10 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove25Percent	Alert if error rate exceeds 25% of the total transactions	Major	Transaction Error rate is above 25 Percent of Total Transactions.
OcnrfTransactionErrorRateAbove50Percent	Alert if error rate exceeds 50% of the total transactions	Critical	Transaction Error rate is above 50 Percent of Total Transactions.
OcnrfActiveSubscribersBelowThreshold	Alert if the number of registered NFs is approaching minor threshold (The operator shall define the threshold as per requirement. Default range: 20-29)	Warning	The number of registered NFs is approaching minor threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.
OcnrfActiveSubscribersBelowMinorThreshold	Alert if the number of registered NFs is below minor threshold (The operator shall define the threshold as per requirement. Default range: 10-19)	Minor	The number of registered NFs is below minor threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.

Table 10-1 (Cont.) OCNRF Alert Details

Alert Name	Alert Description	Severity	Alert Details
OcnrfActiveSubscribersBelowMajorThreshold	Alert if the number of registered NFs is below major threshold (The operator shall define the threshold as per requirement. Default range: 2-9)	Major	The number of registered NFs is below major threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.
OcnrfActiveSubscribersBelowCriticalThreshold	Alert if the number of registered NFs is below critical threshold (The operator shall define the threshold as per requirement. Default range: < 2)	Critical	The number of registered NFs is below critical threshold. Note: The threshold ranges needs to be updated accordingly to the requirement.

**Note:**

Max requests/sec in consideration is 1000/second