

Oracle® Communications

Cloud Native Core, Security Edge Protection Proxy Benchmarking Guide



Release 23.4.3

F91485-05

October 2024

ORACLE®

Copyright © 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Overview	
1.1	Purpose and Scope	1
1.2	References	1
2	Deployment Environment	
2.1	Overall Summary of Benchmarking Configurations	1
2.2	Deployed Components	2
2.3	Deployment Resources	3
2.3.1	Resource Requirements for CNE Observability Services	3
3	SEPP Benchmark Testing	
3.1	Test Scenario 1 - SEPP Performance for 44.8K MPS, 24Hrs Without any Feature Enabled.	1
3.1.1	Testcase and Setup Details	1
3.1.2	CPU and Memory Utilization	4
3.1.3	TPS and DB Statistics	9
3.1.4	Results	10

Acronyms

The following table lists the acronyms and the terminologies used in the document:

Table Acronyms and Terminologies

Acronym	Description
Cat-0	Cat-0 SBI Message Schema Validation Feature
Cat-1	Cat-1 Service API Validation Feature
Cat-2	Cat-2 Network ID Validation Feature
CNC Console	Oracle Communications Cloud Native Configuration Console
CRD	Custom Resource Definition
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
cSEPP/C-SEPP	Consumer Security Edge Protection Proxy
DB	Database
DNS	Domain Name System
EGW	Egress Gateway
FQDN	Fully Qualified Domain Name
Hosted SEPP	Hosted SEPP functionality provides selective routing in Roaming Hub Mode
IGW	Ingress Gateway
IPX	Internetwork Packet Exchange
K8s	Kubernetes
Local PLMN	PLMN managed by Local SEPP
Local SEPP	SEPP in Local PLMN
MNO	Mobile Network Operator
NDB	Network Database
NF	Network Function
Network Function	A functional building block within a network infrastructure, which has well defined external interfaces and well defined functional behavior. In practical terms, a network function is often a network node or physical appliance.
NF Consumer	A generic way to refer to an NF which consumes services provided by another NF. Example: An AMF acts as a Consumer NF that consumes AMPolicy services provided by the PCF.
NF Instance	A specific instance of a network function type.
NF Producer or NF Provider	A generic way to refer to an NF which provides services that can be consumed by another NF. Example: A PCF acts as a Producer NF that provides AMPolicy Services to the AMF.
NRF	Oracle Communications Cloud Native Core, Network Repository Function
OHC	Oracle Help Center
OSDC	Oracle Software Delivery Cloud
PDB	PodDisruptionBudget
PLMN	Public Land Mobile Network
pSEPP/P-SEPP	Producer Security Edge Protection Proxy
Remote PLMN	PLMN managed by Remote SEPP
Remote SEPP	SEPP in Remote PLMN

Table (Cont.) Acronyms and Terminologies

Acronym	Description
Remote SEPP Set	Set of Remote SEPPs to allow alternate routing across Remote SEPPs
REST API	Representational State Transfer Application Programming Interface
Roaming Hub	Roaming Hub is the deployment mode of SEPP. Roaming Hub is used as an intermediate proxy. Each SEPP connects to the Roaming Hub which further connect to another SEPP. All the Remote SEPPs can communicate with each other through roaming hub.
Scaling	Ability to dynamically extend or reduce resources granted to the Virtual Network Function (VNF) as needed. This includes scaling out and in or scaling up and down.
SCM	Security Countermeasure
SEPP	Oracle Communications Cloud Native Core, Security Edge Protection Proxy
SVC	Service
TLS	Transport Layer Security
TH	Topology Hiding
TUH	Topology Unhiding
TPS	Transactions Per Second

What's New in This Guide

This section introduces the documentation updates for Release 23.4.x.

Release 23.4.3 - F91485-04, October 2024

There are no updates to this guide in this release.

Release 23.4.2 - F91485-03, July 2024

There are no updates to this guide in this release.

Release 23.4.1 - F91485-02, April 2024

There are no updates to this guide in this release.

Release 23.4.0 - F91485-01, January 2024

Added [configurations for the 44.8K MPS, 24Hrs run with no features enabled](#).

1

Overview

Security Edge Protection Proxy (SEPP) is a key component of the 5G Service Based Architecture. It is a proxy Network Function (NF) which is used for the secured communication for inter Public Land Mobile Network (PLMN) messages.

For more information about the SEPP architecture, see *Oracle Communications Cloud Native Core, Security Edge Protection Proxy User Guide*.

SEPP can be deployed, upgraded, and rolled back using Continuous Delivery Control Server (CDCS) or Command Line Interface (CLI) procedures as described in *Oracle Communications Cloud Native Core Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*. CDCS provides continuous delivery functionality for multi site Cloud Native Core (CNC) installations. For more information about CDCS, see *Oracle Communications Cloud Native Core, Continuous Delivery Control Server User Guide*.

The user can install either SEPP or Roaming Hub/Hosted SEPP.

Note

The performance and capacity of the SEPP system may vary based on the call model, Feature/Interface configuration, and underlying CNE and hardware environment.

1.1 Purpose and Scope

This document is designed to help operators measure the capacity and performance of SEPP, SEPP microservices, and deployment environment setup software such as Cloud Native Environment (CNE) and cnDBTier.

This document provides SEPP performance and capacity data. It is recommended that SEPP is run through a benchmark on the target cloud native infrastructure to determine the capacity and performance in the target infrastructure. This information can be used to adjust the initial deployment resources and to help predict resource requirements when SEPP is scaled up.

1.2 References

For more information on Security Edge Protection Proxy (SEPP), refer to the following documents:

- *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Security Edge Protection Proxy User Guide*
- *Oracle Communications Cloud Native Core, Security Edge Protection Proxy REST Specification Guide*
- *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Troubleshooting Guide*

- *Oracle Communications Cloud Native Core, cnDBTier Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, cnDBTier User Guide*


2

Deployment Environment

This section provides information about the cloud native infrastructure used for SEPP benchmarking.

The following diagram represents the deployment configurations of SEPP:

Figure 2-1 Deployment Diagram

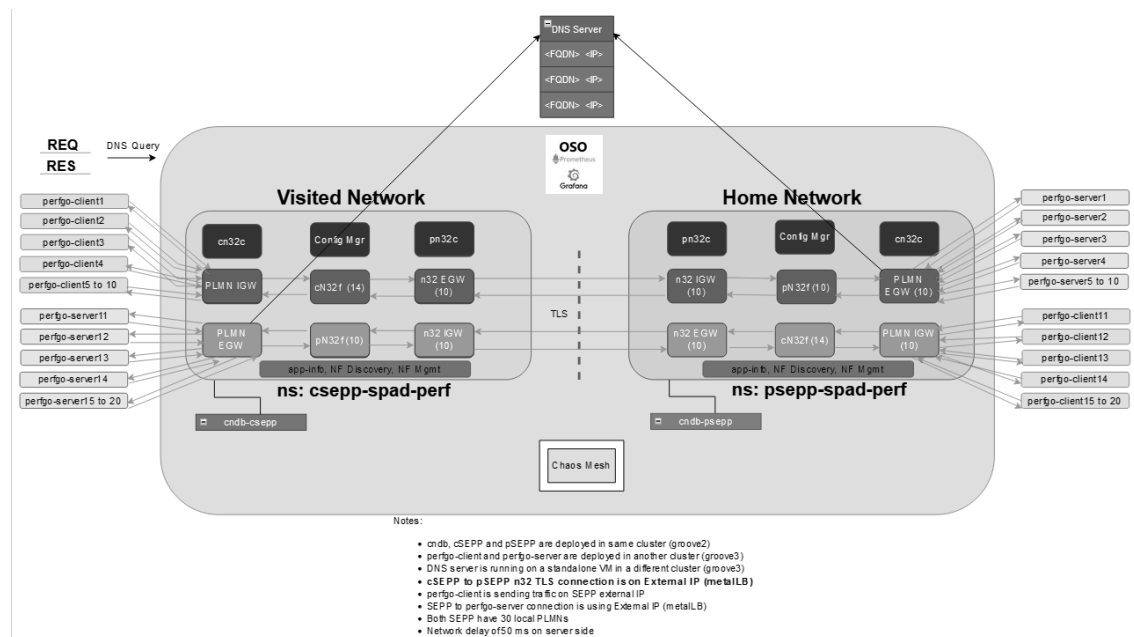

The details about the deployment configurations are as follows:

- cnDBTier, cSEPP, pSEPP are deployed in same cluster
- pergo-client and pergo-server are deployed in another cluster
- DNS server is running on a standalone VM in a different cluster
- cSEPP to pSEPP n32 TLS connection is on External IP (metalLB)
- pergo-client is sending traffic on SEPP external IP
- SEPP to pergo-server connection is using External IP (metalLB)
- Both SEPP have 30 local PLMNs
- Network delay of 50 ms on server side

2.1 Overall Summary of Benchmarking Configurations

The following table lists the overall summary of benchmarking configurations.

Overall Summary

S. No.	Execution Time	SEPP Release	CNCC Release	CNDBTier Release	ASM Enabled / Disabled	OS Installed	HA Proxy Installed	Cluster	Site-1 MP S	Site-2 MP S	Overall MP S	Network Delay on server side	Features Enabled	Status	Remarks
Run 1	24hr	csep-23.3.1 & psep-23.3.1	23.3.1	23.3.0	Disabled	Yes	NA	groove2	22.4K	22.4K	44.8K	NA	NA	PASS	NA

2.2 Deployed Components

Deployment Platform

Oracle Communications Cloud Native Environment (OCCNE) 22.3.0 and BareMetal are used for performing benchmark tests.

Observability Services

The following table lists observability services and their versions that are used for SEPP benchmark tests. These services fetch SEPP metrics, alerts, logs, and traces.

Table 2-1 Observability Services

Service	Version
Elasticsearch	7.9.3
Fluentd	3.1.0
Kibana	7.9.3
Prometheus	1.2.2
Grafana	7.5.11
Jaeger	1.22.0

Cloud Native Orchestrator

Kubernetes 1.20.x is used for managing application pods across the cluster.

cnDBTier

cnDBTier 22.4.0 is used for performing benchmark tests.

For more information about above mentioned components, see *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*.

2.3 Deployment Resources

The performance and capacity of SEPP can vary based on the chosen environment and how SEPP is deployed. This section provides information about CNE resources used to perform benchmark tests.

2.3.1 Resource Requirements for CNE Observability Services

The following table provides information about the number of pods required by each CNE service.

Table 2-2 Resource Requirements for CNE Observability Services

Service Name	Number of Pods
Prometheus Server	1
Prometheus-pushgateway	1
Alert Manager	2
Fluentd	1 per worker node
Prom-node-exporter	1 per worker node
MetalLB speaker	1 per worker node
ES Data/Master	3/3
ES Curator	1
ES-exporter	1
Grafana	1
Kibana	1
kube-state-metrics	1
jaeger-agent	1 per worker node
jaeger-collector	1
jaeger-query	1
rook-ceph-osd	1 for each raw disk available to OS on all worker nodes
rook-ceph-mgr	1
rook-ceph-mon	3
rook-ceph-osd	1

3

SEPP Benchmark Testing

This section provides information about the SEPP testcases run in different scenarios.

3.1 Test Scenario 1 - SEPP Performance for 44.8K MPS, 24Hrs Without any Feature Enabled.

This test scenario describes performance and capacity of SEPP and provides the benchmarking results for 44.8K MPS, 24Hrs without feature enabled and without any delay at server end.

3.1.1 Testcase and Setup Details

Traffic Model Details:

Call Mix:

Table 3-1 Call Mix

NF-Consumer	NF-Producer	Reference Point ID	Traffic %
vAMF	hUDM	N8	34.29
vAMF	hAUSF	N12	8.39
vNRF	hNRF	N27	13.99
vNSSF	hNSSF	N31	2.5
vPCF	hPCF	N24	11.9
vSMF	hUDM	N10	8.57
vSMF	hSMF	N16	17.86
vSMSF	hUDM	N21	2.5

Call Rate: Total 62K MPS: 31K MPS (Home PLMN) + 31K MPS (Visited PLMN)

Table 3-2 Setup Details

Set up Details	
Active User	NA for SEPP
Execution Timeline	24Hrs
Environment	Bare Metal
Cluster	Groove2
Bastion-1 IP	10.121.20.66
OCCNE Version	23.3.1
cnDBTier	23.3.0
cSEPP	23.3.1

Table 3-2 (Cont.) Setup Details

Set up Details	
pSEPP	23.3.1
CNC Console	23.3.0
Set up Configuration	<ul style="list-style-type: none"> Both SEPPs are deployed in Model-B. cnDBTier is deployed in two-site georedundancy in each site.

Resource Footprint for cSEPP**Table 3-3 Resource Footprint for cSEPP**

Services	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
ocsepp-appinfo	2	1	1	2Gi	1Gi
ocsepp-cn32c-svc	2	2	2	2Gi	2Gi
ocsepp-cn32f-svc	7	5	5	8Gi	8Gi
ocsepp-coherence-svc	1	1	1	2Gi	2Gi
ocsepp-config-mgr-svc	1	2	2	2Gi	2Gi
ocsepp-n32-egress-gateway	7	5	5	5Gi	5Gi
ocsepp-n32-ingress-gateway	7	6	6	5Gi	5Gi
ocsepp-nf-mediation	2	8	8	8Gi	8Gi
ocsepp-ocpm-config	2	1	1	1Gi	1Gi
ocsepp-performance	2	2	2	4Gi	200Mi
ocsepp-plmn-egress-gateway	7	5	5	5Gi	5Gi
ocsepp-plmn-ingress-gateway	7	5	5	5Gi	5Gi
ocsepp-pn32c-svc	2	2	2	2Gi	2Gi
ocsepp-pn32f-svc	7	5	5	8Gi	8Gi
ocsepp-sepp-nrf-client-nfdiscovery	2	1	1	2Gi	2Gi
ocsepp-sepp-nrf-client-nfmanagement	1	1	1	1Gi	1Gi

Resource Footprint for pSEPP

Table 3-4 Resource Footprint for pSEPP

Services	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
ocsepp-cn32c-svc	2	2	2	2Gi	2Gi
ocsepp-cn32f-svc	7	5	5	8Gi	8Gi
ocsepp-coherence-svc	1	1	1	2Gi	2Gi
ocsepp-config-mgr-svc	1	2	2	2Gi	2Gi
ocsepp-n32-egress-gateway	7	5	5	5Gi	5Gi
ocsepp-n32-ingress-gateway	7	6	6	5Gi	5Gi
ocsepp-nf-mediation	2	8	8	8Gi	8Gi
ocsepp-ocpm-config	2	1	1	1Gi	1Gi
ocsepp-performance	2	2	2	4Gi	200Mi
ocsepp-plmn-egress-gateway	7	5	5	5Gi	5Gi
ocsepp-plmn-ingress-gateway	7	5	5	5Gi	5Gi
ocsepp-pn32c-svc	2	2	2	2Gi	2Gi
ocsepp-pn32f-svc	7	5	5	8Gi	8Gi
ocsepp-sepp-nrf-client-nfdiscovery	2	1	1	2Gi	2Gi
ocsepp-sepp-nrf-client-nfmanagement	1	1	1	1Gi	1Gi

Resource Footprint for cnDBTier

Table 3-5 Resource Footprint for cnDBTier

Services	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
mysql-cluster-db-backup-manager-svc/db-backup-manager-svc	1	100m	100m	128Mi	128Mi
mysql-cluster-db-monitor-svc/db-monitor-svc	1	1	1	1Gi	1Gi
ndbappmysqld/init-sidecar	2	100m	100m	256Mi	256Mi
ndbappmysqld/mysqlndbcluster	2	8	8	10Gi	10Gi
ndbmcmd/db-infra-monitor-svc	2	100m	100m	256Mi	256Mi
ndbmcmd/mysqlndbcluster	2	4	4	10Gi	8Gi
ndbmtd/db-backup-executor-svc	4	100m	100m	256Mi	256Mi
ndbmtd/db-infra-monitor-svc	4	100m	100m	256Mi	256Mi
ndbmtd/mysqlndbcluster	4	10	10	18Gi	16Gi

3.1.2 CPU and Memory Utilization

This section lists the CPU and memory utilization at both site1 and site2 for Consumer SEPP (csepp) and Producer SEPP (psepp).

csepp-Site1

Table 3-6 csepp-Site1

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-appinfo/appinfo	2	0.02 (1%)	0.49 (24.5%)
ocsepp-cn32c-svc/cn32c-svc	2	0 (0%)	1.06 (26.5%)

Table 3-6 (Cont.) csepp-Site1

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-cn32f-svc/cn32f-svc	7	11.12 (31.77%)	9.58 (17.11%)
ocsepp-config-mgr-svc/ config-mgr-svc	1	0.01 (1%)	0.57 (28.5%)
ocsepp-n32-egress- gateway/n32-egress- gateway	7	14.13 (40.37%)	7.31 (20.89%)
ocsepp-n32-ingress- gateway/n32-ingress- gateway	7	13.22 (31.48%)	13.11 (31.21%)
ocsepp-ocpm-config/ config-server	2	0.01 (0.25%)	0.67 (16.75%)
ocsepp-performance/ perf-info	2	0.05 (1.25%)	0.22 (55%)
ocsepp-plmn-egress- gateway/plmn-egress- gateway	7	10.68 (30.51%)	8.83 (25.23%)
ocsepp-plmn-ingress- gateway/plmn-ingress- gateway	7	12.02 (34.34%)	15.25 (43.57%)
ocsepp-pn32c-svc/ pn32c-svc	2	0 (0%)	0.94 (23.5%)
ocsepp-pn32f-svc/pn32f- svc	7	11.19 (31.97%)	9.94 (17.75%)
ocsepp-sepp-nrf-client- nfdiscovery/nrf-client- nfdiscovery	2	0.01 (0.5%)	0.91 (22.75%)
ocsepp-sepp-nrf-client- nfmanagement/nrf- client-nfmanagement	1	0 (0%)	0.49 (49%)
ocsepp-nf-mediation/nf- mediation	2	0 (0%)	1.03 (6.44%)
ocsepp-coherence-svc/ coherence-svc	1	0 (0%)	0.22 (11%)

psepp-Site2

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-appinfo/appinfo	1	0.01 (1%)	0.22 (22%)
ocsepp-cn32c-svc/ cn32c-svc	4	0.01 (0.13%)	1.59 (19.88%)
ocsepp-cn32f-svc/cn32f- svc	14	23.6 (47.2%)	23.21 (29.01%)
ocsepp-config-mgr-svc/ config-mgr-svc	1	0.02 (1%)	0.58 (29%)

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-n32-egress-gateway/n32-egress-gateway	10	21.42 (42.84%)	19.45 (38.9%)
ocsepp-n32-egress-gateway/update-service	10	2.65 (26.5%)	1.76 (17.6%)
ocsepp-n32-ingress-gateway/n32-ingress-gateway	10	23.23 (46.46%)	16.03 (32.06%)
ocsepp-n32-ingress-gateway/update-service	10	2.58 (25.8%)	1.71 (17.1%)
ocsepp-ocpm-config/config-server	1	0 (0%)	0.31 (31%)
ocsepp-performance/perf-info	1	0.03 (0.38%)	0.19 (1.19%)
ocsepp-plmn-egress-gateway/plmn-egress-gateway	10	20.28 (40.56%)	18.62 (37.24%)
ocsepp-plmn-egress-gateway/update-service	10	2.72 (27.2%)	1.75 (17.5%)
ocsepp-plmn-ingress-gateway/plmn-ingress-gateway	10	22.68 (45.36%)	25.9 (51.8%)
ocsepp-plmn-ingress-gateway/update-service	10	2.69 (26.9%)	1.72 (17.2%)
ocsepp-pn32c-svc/pn32c-svc	2	0.01 (0.25%)	0.99 (24.75%)
ocsepp-pn32f-svc/pn32f-svc	10	19.87 (39.74%)	13.93 (17.41%)
ocsepp-sepp-nrf-client-nfdiscovery/nrf-client-nfdiscovery	1	0 (0%)	0.29 (9.67%)
ocsepp-sepp-nrf-client-nfmanagement/nrf-client-nfmanagement	1	0 (0%)	0.31 (31%)

cnDBTier_csepp**Table 3-7 csepp-cndb-spad-perf**

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
mysql-cluster/db-backup-manager-svc	1	0 (0%)	0.04 (32%)
mysql-cluster/db-monitor-svc	1	0.01 (5%)	0.23 (47.13%)
mysql-cluster/delhi-mumbai-replication-svc	1	0 (0%)	0.4 (20%)
ndbappmysqld/init-sidecar	2	0.01 (5%)	0 (0%)

Table 3-7 (Cont.) csepp-cndb-spad-perf

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ndbappmysqld/ mysqlndbcluster	2	0.05 (0.31%)	1.69 (8.45%)
ndbmcmd/ mysqlndbcluster	3	0.03 (0.25%)	0.05 (0.21%)
ndbmtl/db-backup- executor-svc	4	0 (0%)	0.05 (10%)
ndbmtl/mysqlndbcluster	4	0.15 (0.47%)	59.52 (82.67%)
ndbmysqld/init-sidecar	2	0.01 (5%)	0 (0%)
ndbmysqld/ mysqlndbcluster	2	0.03 (0.38%)	3.3 (16.5%)

cnDBTier_csepp**Table 3-8 csepp-cndb-spad-perf2**

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-appinfo/appinfo	2	0.02 (1%)	0.49 (24.5%)
ocsepp-cn32c-svc/ cn32c-svc	2	0.01 (0.25%)	0.79 (19.75%)
ocsepp-cn32f-svc/cn32f- svc	7	11.01 (31.46%)	9.23 (16.48%)
ocsepp-config-mgr-svc/ config-mgr-svc	1	0.01 (1%)	0.54 (27%)
ocsepp-n32-egress- gateway/n32-egress- gateway	7	14.2 (40.57%)	7.44 (21.26%)
ocsepp-n32-ingress- gateway/n32-ingress- gateway	7	13.44 (32%)	12.45 (29.64%)
ocsepp-ocpm-config/ config-server	2	0.01 (0.25%)	0.68 (17%)
ocsepp-performance/ perf-info	2	0.05 (1.25%)	0.23 (57.5%)
ocsepp-plmn-egress- gateway/plmn-egress- gateway	7	10.36 (29.6%)	9.28 (26.51%)
ocsepp-plmn-ingress- gateway/plmn-ingress- gateway	7	12.76 (36.46%)	16.17 (46.2%)
ocsepp-pn32c-svc/ pn32c-svc	2	0.01 (0.25%)	1.06 (26.5%)
ocsepp-pn32f-svc/pn32f- svc	7	10.6 (30.29%)	9.92 (17.71%)
ocsepp-sepp-nrf-client- nrfdiscovery/nrf-client- nrfdiscovery	2	0 (0%)	0.95 (23.75%)

Table 3-8 (Cont.) csepp-cndb-spad-perf2

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ocsepp-sepp-nrf-client-nfmanagement/nrf-client-nfmanagement	1	0 (0%)	0.49 (49%)
ocsepp-nf-mediation/nf-mediation	2	0 (0%)	1.12 (7%)
ocsepp-coherence-svc/coherence-svc	1	0.01 (0.5%)	0.22 (11%)

cnDBTier_psepp**Table 3-9 psepp-cndb-spad-perf**

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
mysql-cluster/db-backup-manager-svc	1	0 (0%)	0.05 (39.06%)
mysql-cluster/db-monitor-svc	1	0 (0%)	0.39 (39%)
ndbappmysqld/mysqlndbcluster	2	0.04 (0.25%)	7.54 (37.7%)
ndbappmysqld/init-sidecar	2	0 (0%)	0.01 (1.95%)
ndbmcmd/mysqlndbcluster	2	0.02 (0.25%)	0.05 (0.31%)
ndbmcmd/db-infra-monitor-svc	2	0 (0%)	0.03 (5.86%)
ndbmt/mysqlndbcluster	4	0.09 (0.23%)	29.86 (46.66%)
ndbmt/db-backup-executor-svc	4	0 (0%)	0.14 (13.67%)
ndbmt/db-infra-monitor-svc	4	0.01 (2.5%)	0.08 (15.63%)

cnDBTier_psepp**Table 3-10 psepp-cndb-spad-perf2**

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
mysql-cluster/db-backup-manager-svc	1	0 (0%)	0.05 (39.06%)
mysql-cluster/db-monitor-svc	1	0 (0%)	0.37 (37%)
ndbappmysqld/mysqlndbcluster	2	0.04 (0.25%)	6.29 (31.45%)
ndbappmysqld/init-sidecar	2	0 (0%)	0.01 (1.95%)

Table 3-10 (Cont.) psepp-cndb-spad-perf2

Microservice/ Container	Pod Count	Overall CPU	Overall Memory
ndbmgmd/ mysqlndbcluster	2	0.02 (0.25%)	0.05 (0.31%)
ndbmgmd/db-infra- monitor-svc	2	0 (0%)	0.03 (5.86%)
ndbmtl/mysqlndbcluster	4	0.08 (0.2%)	29.84 (46.63%)
ndbmtl/db-backup- executor-svc	4	0 (0%)	0.14 (13.67%)
ndbmtl/db-infra-monitor- svc	4	0.01 (2.5%)	0.08 (15.63%)

3.1.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) Statistics for Consumer SEPP (csepp) and Producer SEPP (psepp).

TPS (Transactions Per Second)

Table 3-11 TPS (Transactions Per Second)

TPS	cSEPP	pSEPP
PLMN IGW	11.2K TPS	11.2K TPS
CN32F	11.2K TPS	11.2K TPS
N32 EGW	11.2K TPS	11.2K TPS
N32 IGW	11.2K TPS	11.2K TPS
PN32F	11.2K TPS	11.2K TPS
PLMN EGW	11.2K TPS	11.2K TPS

DB (Database) Statistics

Table 3-12 DB (Database) Statistics

DB Stats	csepp-cndb-spad-perf	psepp-cndb-spad-perf
Write Rate	0.251	0.251
Commit Rate	1.63	1.62
PVC Utilization(GB)	1.42	1.56
Read Rate	13.1	13.4

csepp: NF Service Latency

Table 3-13 csepp: NF Service Latency

NF Service Latency	Min.	Max.	Avg.
IGW(T2) (s)	0.014	0.21	0.003
pn32f(T3) (s)	0.022	1.32	0.51

Table 3-13 (Cont.) csepp: NF Service Latency

NF Service Latency	Min.	Max.	Avg.
cn32f (T4) (s)	0.431	0.432	0.312
EGW(T5) (s)	0.01	0.06	0.02
Procedural Latency(Perfgo)(T1) (ms)	NA	NA	10.1

psepp: NF Service Latency**Table 3-14 psepp: NF Service Latency**

NF Service Latency	Min.	Max.	Avg.
IGW(T2) (s)	0.014	0.21	0.003
pn32f(T3) (s)	0.024	1.21	0.21
cn32f (T4) (s)	0.323	0.451	0.512
EGW(T5) (s)	0.01	0.05	0.02
Procedural Latency(Perfgo)(T1(ms)	NA	NA	9.8

3.1.4 Results

PerfGo Avg Latency

csepp: 10.1 ms

psepp: 9.8 ms

Call Success

csepp: 100%

psepp: 100%